

**Table 1 - RBW as a function of frequency**


Frequency	RBW
9 ~ 150 kHz	200 ~ 300 Hz
0.15 ~ 30 MHz	9 ~ 10 kHz
30 ~ 1000 MHz	100 ~ 120 kHz
> 1000 MHz	1 MHz

**Average Field Strength Measurements**


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = Power Average (RMS)
5. Number of sweep point = 2001 (Number of sweep points must be  $\geq 2 \times \text{span} / \text{RBW}$ )
6. Sweep time = auto
7. Trace (RMS) averaging was performed over at least 100 traces.

### 7.6.4. Test Setup


9kHz ~ 30MHz Test Setup:

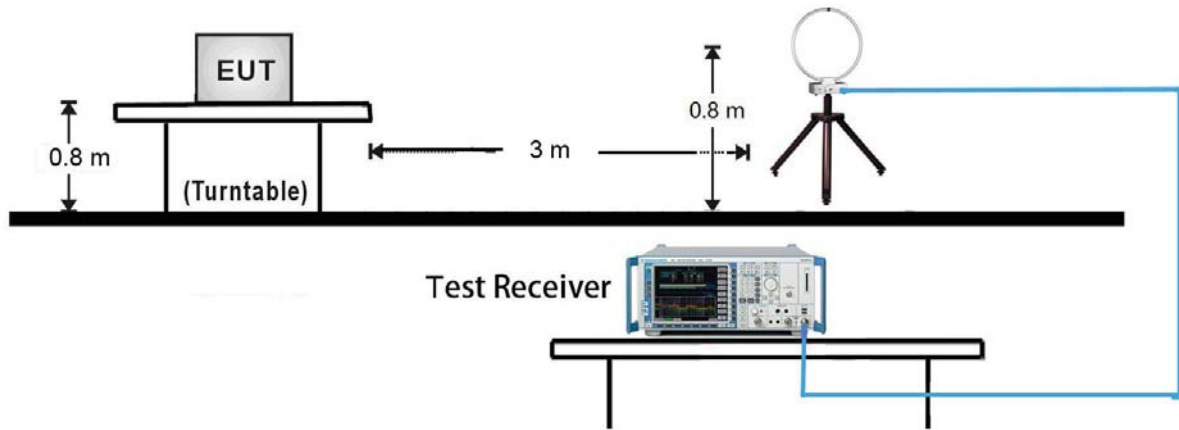


30MHz ~ 1GHz Test Setup:

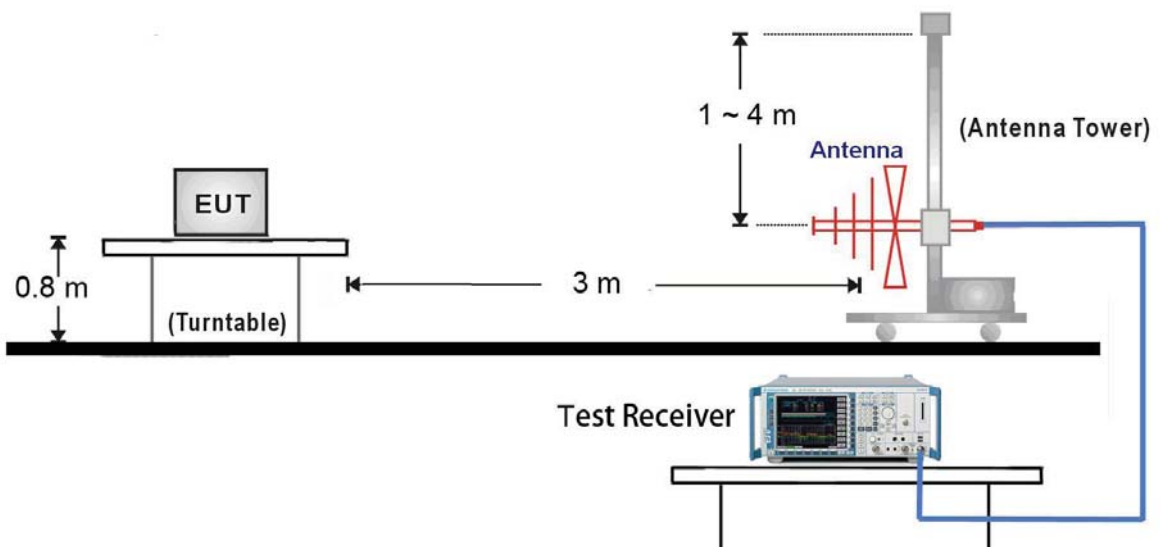

### 1GHz ~ 18GHz Test Setup:

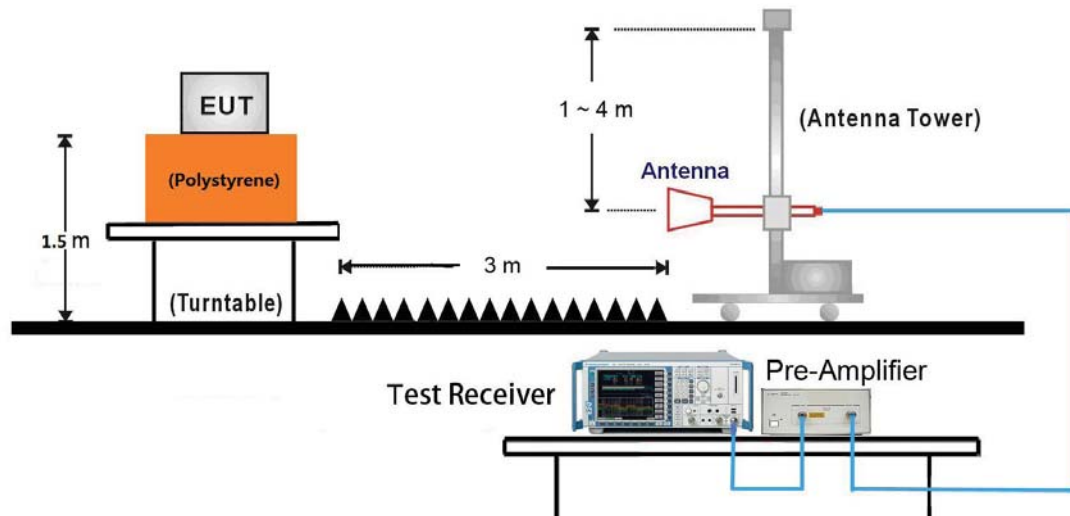

### 18GHz ~ 25GHz Test Setup:

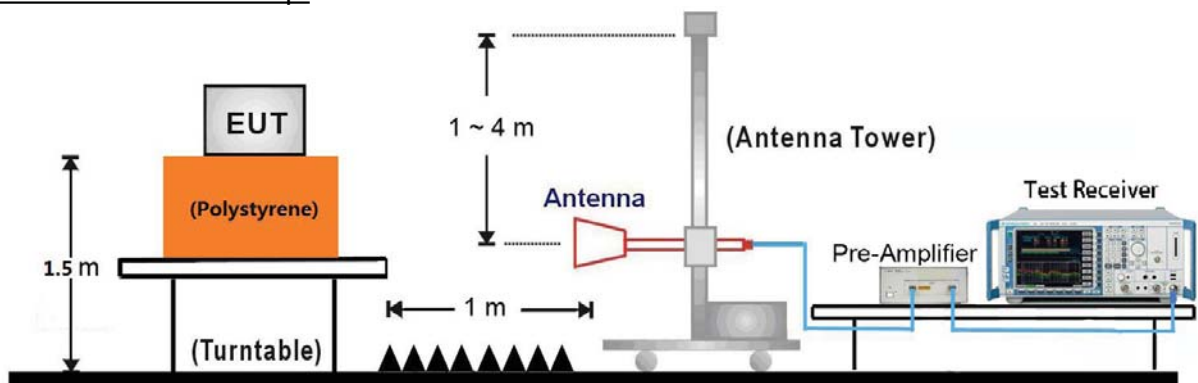

### 7.6.5. Test Result

Test Mode:	802.11b - Ant 1	Test Date:	2021-09-09
Test Channel:	01	Test Engineer:	Amos Xia
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Level (dB $\mu$ V)	Factor (dB)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector	Polarization
	4824	42.8	7.53	74	31.2	Peak	Horizontal
	7620	50.88	14.75	74	23.12	Peak	Horizontal
*	9578	51.22	17.27	89.3	38.08	Peak	Horizontal
*	10253	53.46	18.14	89.3	35.84	Peak	Horizontal
	4824	43.42	7.53	74	30.58	Peak	Vertical
	5132	42.3	8.14	74	31.7	Peak	Vertical
*	6782	47.94	13.83	89.3	41.36	Peak	Vertical
*	7200	50.32	14.95	89.3	38.98	Peak	Vertical

Note 1: "\*" is not in restricted band, its limit is 20dBc of the fundamental emission level (109.3dB $\mu$ V/m) or 15.209 which is higher.

Test Mode:	802.11b - Ant 1	Test Date:	2021-09-09
Test Channel:	06	Test Engineer:	Amos Xia
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Level (dB $\mu$ V)	Factor (dB)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector	Polarization
	4874	42.87	7.53	74	31.13	Peak	Horizontal
	5423	44.53	9.71	74	29.47	Peak	Horizontal
*	6750	47.3	13.64	92.61	45.31	Peak	Horizontal
*	9872	52.7	17.43	92.61	39.91	Peak	Horizontal
	4200	42.24	6.25	74	31.76	Peak	Vertical
	4874	44.17	7.53	74	29.83	Peak	Vertical
*	7120	50.16	14.71	92.61	42.45	Peak	Vertical
*	8871	51	15.76	92.61	41.61	Peak	Vertical

Note 1: "\*" is not in restricted band, its limit is 20dBc of the fundamental emission level (112.61dB $\mu$ V/m) or 15.209 which is higher.

Test Mode:	802.11b - Ant 1	Test Date:	2021-09-09
Test Channel:	11	Test Engineer:	Amos Xia
Remark:	3. Average measurement was not performed if peak level lower than average limit. 4. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Level (dB $\mu$ V)	Factor (dB)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector	Polarization
	4120	41.06	5.98	74	32.94	Peak	Horizontal
	4925	42.23	7.64	74	31.77	Peak	Horizontal
*	6854	49.03	14.47	92.15	43.12	Peak	Horizontal
*	8964	51.97	15.63	92.15	40.18	Peak	Horizontal
	4925	40.99	7.64	74	33.01	Peak	Vertical
	5065	42.54	7.88	74	31.46	Peak	Vertical
*	6900	48.9	14.69	92.15	43.25	Peak	Vertical
*	8756	51.07	15.52	92.15	41.08	Peak	Vertical


Note 1: "\*" is not in restricted band, its limit is 20dBc of the fundamental emission level (112.15dB $\mu$ V/m) or 15.209 which is higher.

**The worst case of Radiated Emission below 1GHz:**

**30MHz – 1GHz Test Data**

EUT:	Taurus-MediaPlayer	Polarity:	Horizontal
Model:	TB60	Power Supply:	1
Mode:	Transmit by 802.11b at Channel 2412MHz	Voltage:	120V/60Hz
Environment:	Temp: 25°C; Humi:60%	Engineer:	Amos Xia

**Test Graph**

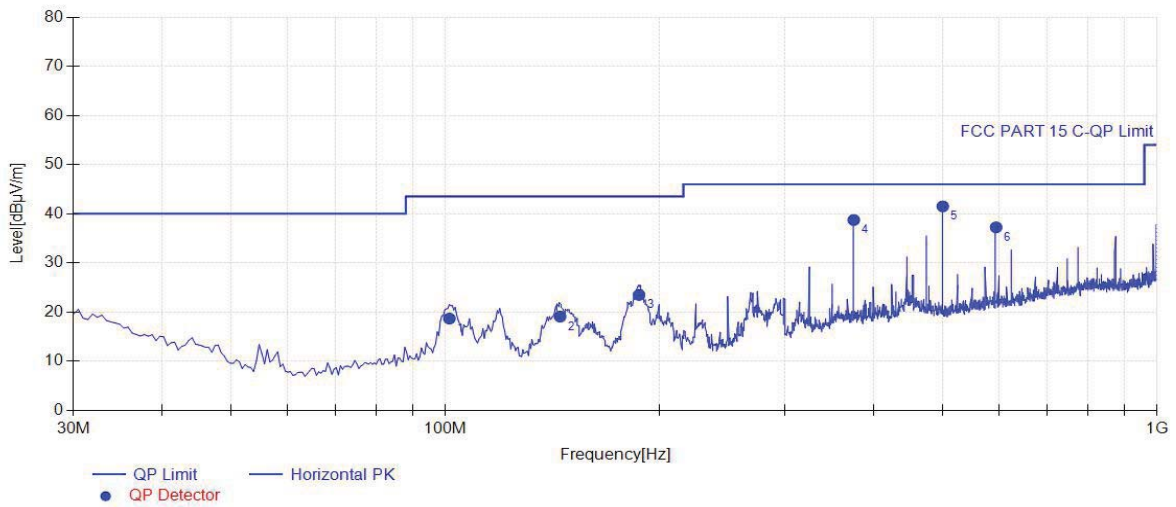


Final Data List								
NO.	Freq. [MHz]	Factor [dB]	QP Value [dBµV/m]	QP Limit [dBµV/m]	QP Margin [dB]	Height [cm]	Angle [°]	Polarity
1	101.295	11.28	18.69	43.50	24.81	100	32	Horizontal
2	144.945	11.10	19.10	43.50	24.40	100	17	Horizontal
3	187.140	10.36	23.50	43.50	20.00	100	69	Horizontal
4	374.835	15.33	38.74	46.00	7.26	100	17	Horizontal
5	499.965	18.92	41.52	46.00	4.48	100	119	Horizontal
6	594.055	20.27	37.25	46.00	8.75	100	4	Horizontal

Note 1: The test trace is same as the ambient noise and the amplitude of the emissions are attenuated more than 20dB below the permissible (the test frequency range: 9kHz ~ 30MHz, 18GHz ~ 25GHz), therefore no data appear in the report.

EUT:	Taurus-MediaPlayer	Polarity:	Vertical
Model:	TB60	Power Supply:	1
Mode:	Transmit by 802.11b at Channel 2412MHz	Voltage:	120V/60Hz
Environment:	Temp: 25°C; Humi:60%	Engineer:	Amos Xia

**Test Graph**

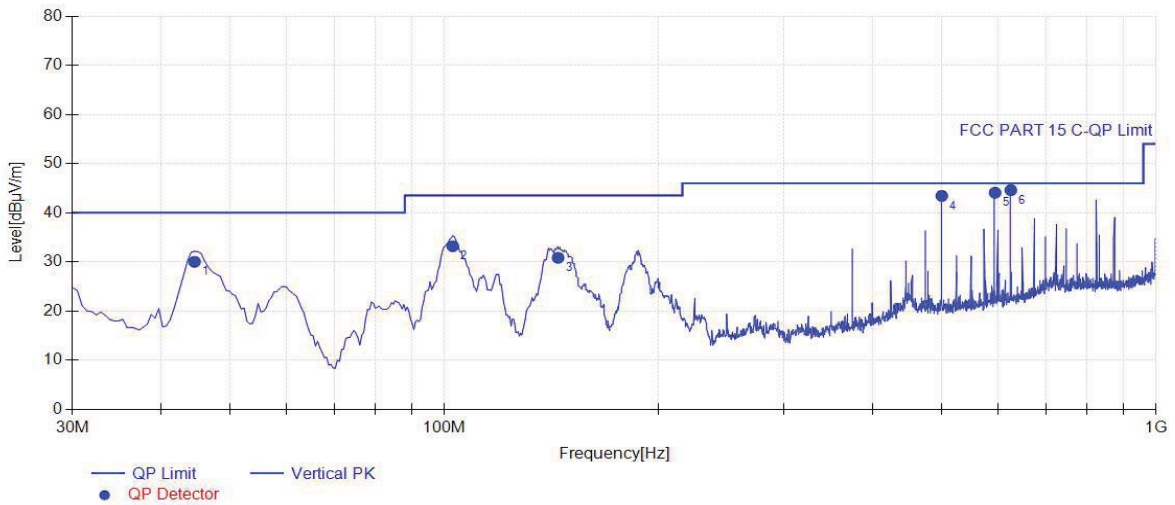


Final Data List								
NO.	Freq. [MHz]	Factor [dB]	QP Value [dBµV/m]	QP Limit [dBµV/m]	QP Margin [dB]	Height [cm]	Angle [°]	Polarity
1	44.5500	12.31	30.04	40.00	9.96	100	37	Vertical
2	102.750	11.31	33.22	43.50	10.28	100	109	Vertical
3	144.460	11.12	30.86	43.50	12.64	100	161	Vertical
4	499.965	18.92	43.44	46.00	2.56	100	37	Vertical
5	594.055	20.27	44.07	46.00	1.93	100	241	Vertical
6	625.095	20.70	44.61	46.00	1.39	100	357	Vertical

Note 1: The test trace is same as the ambient noise and the amplitude of the emissions are attenuated more than 20dB below the permissible (the test frequency range: 9kHz ~ 30MHz, 18GHz ~ 25GHz), therefore no data appear in the report.



EUT:	Taurus-MediaPlayer	Polarity:	Horizontal
Model:	TB60	Power Supply:	1
Mode:	Transmit by 802.11b at Channel 2437MHz	Voltage:	120V/60Hz
Environment:	Temp: 25°C; Humi:60%	Engineer:	Amos Xia

**Test Graph**

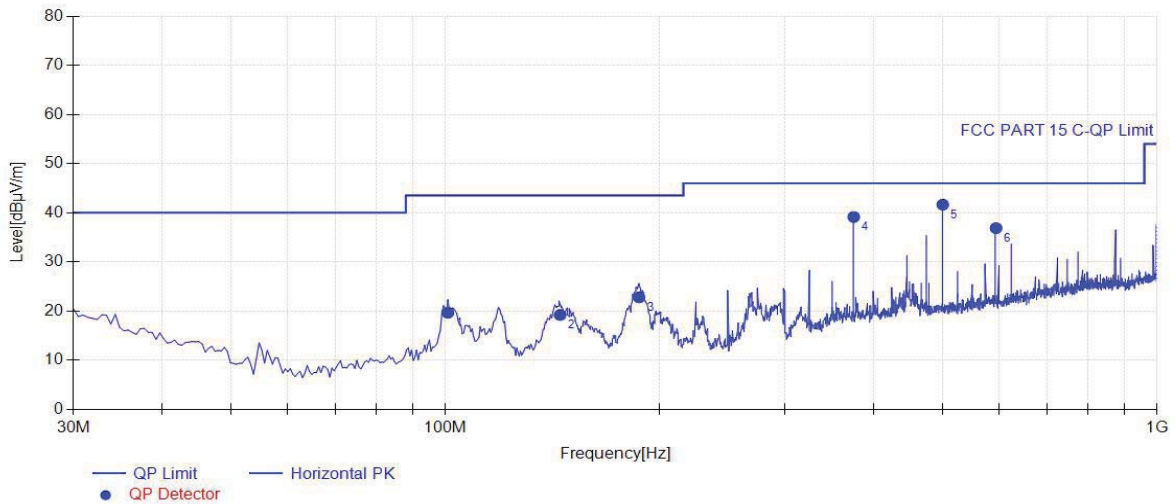


Final Data List								
NO.	Freq. [MHz]	Factor [dB]	QP Value [dBµV/m]	QP Limit [dBµV/m]	QP Margin [dB]	Height [cm]	Angle [°]	Polarity
1	100.810	11.27	19.67	43.50	23.83	100	47	Horizontal
2	144.945	11.10	19.22	43.50	24.28	100	39	Horizontal
3	187.140	10.36	22.79	43.50	20.71	100	68	Horizontal
4	374.835	15.33	39.15	46.00	6.85	100	68	Horizontal
5	499.965	18.92	41.66	46.00	4.34	100	356	Horizontal
6	594.055	20.27	36.88	46.00	9.12	100	4	Horizontal

Note 1: The test trace is same as the ambient noise and the amplitude of the emissions are attenuated more than 20dB below the permissible (the test frequency range: 9kHz ~ 30MHz, 18GHz ~ 25GHz), therefore no data appear in the report.

EUT:	Taurus-MediaPlayer	Polarity:	Vertical
Model:	TB60	Power Supply:	1
Mode:	Transmit by 802.11b at Channel 2437MHz	Voltage:	120V/60Hz
Environment:	Temp: 25°C; Humi:60%	Engineer:	Amos Xia

**Test Graph**

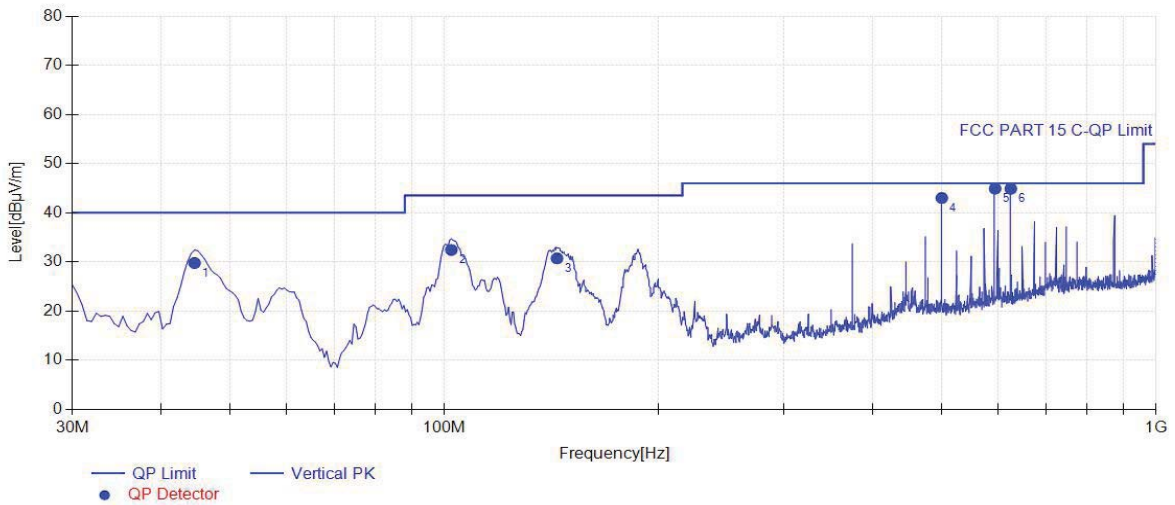


Final Data List								
NO.	Freq. [MHz]	Factor [dB]	QP Value [dBµV/m]	QP Limit [dBµV/m]	QP Margin [dB]	Height [cm]	Angle [°]	Polarity
1	44.5500	12.31	29.79	40.00	10.21	100	242	Vertical
2	102.265	11.30	32.45	43.50	11.05	100	176	Vertical
3	143.975	11.15	30.73	43.50	12.77	100	190	Vertical
4	499.965	18.92	43.01	46.00	2.99	100	46	Vertical
5	594.055	20.27	44.92	46.00	1.08	100	250	Vertical
6	625.095	20.70	44.89	46.00	1.11	100	0	Vertical

Note 1: The test trace is same as the ambient noise and the amplitude of the emissions are attenuated more than 20dB below the permissible (the test frequency range: 9kHz ~ 30MHz, 18GHz ~ 25GHz), therefore no data appear in the report.

EUT:	Taurus-MediaPlayer	Polarity:	Horizontal
Model:	TB60	Power Supply:	1
Mode:	Transmit by 802.11b at Channel 2462MHz	Voltage:	120V/60Hz
Environment:	Temp: 25°C; Humi:60%	Engineer:	Amos Xia

**Test Graph**

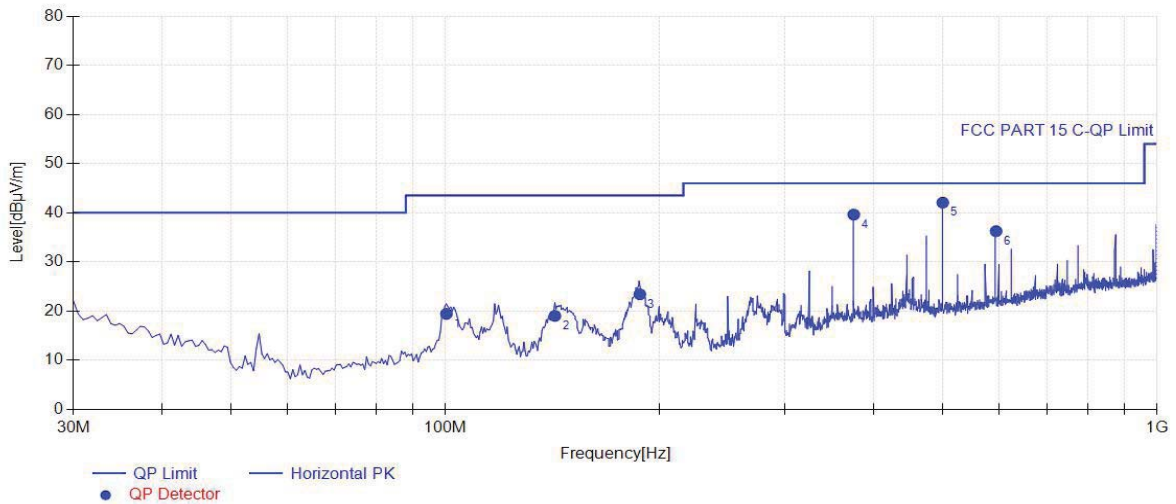


Final Data List								
NO.	Freq. [MHz]	Factor [dB]	QP Value [dBµV/m]	QP Limit [dBµV/m]	QP Margin [dB]	Height [cm]	Angle [°]	Polarity
1	100.325	11.26	19.44	43.50	24.06	100	66	Horizontal
2	142.520	11.22	19.04	43.50	24.46	100	24	Horizontal
3	187.625	10.34	23.43	43.50	20.07	100	53	Horizontal
4	374.835	15.33	39.64	46.00	6.36	100	31	Horizontal
5	499.965	18.92	42.07	46.00	3.93	100	360	Horizontal
6	594.055	20.27	36.26	46.00	9.74	100	4	Horizontal

Note 1: The test trace is same as the ambient noise and the amplitude of the emissions are attenuated more than 20dB below the permissible (the test frequency range: 9kHz ~ 30MHz, 18GHz ~ 25GHz), therefore no data appear in the report.

EUT:	Taurus-MediaPlayer	Polarity:	Vertical
Model:	TB60	Power Supply:	1
Mode:	Transmit by 802.11b at Channel 2462MHz	Voltage:	120V/60Hz
Environment:	Temp: 25°C; Humi:60%	Engineer:	Amos Xia

**Test Graph**

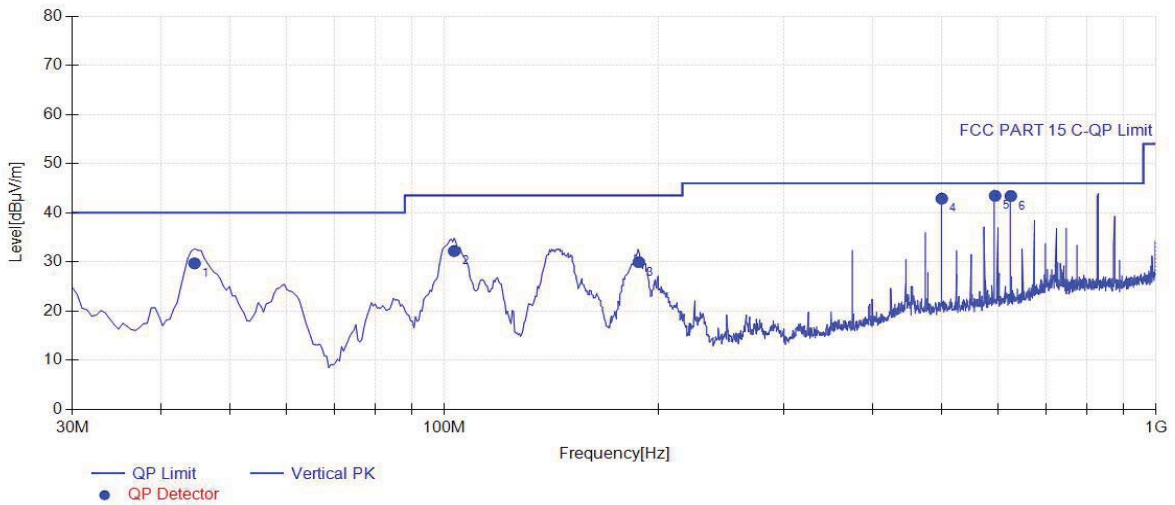


Final Data List								
NO.	Freq. [MHz]	Factor [dB]	QP Value [dBµV/m]	QP Limit [dBµV/m]	QP Margin [dB]	Height [cm]	Angle [°]	Polarity
1	44.5500	12.31	29.72	40.00	10.28	100	107	Vertical
2	103.235	11.32	32.21	43.50	11.29	100	123	Vertical
3	187.625	10.34	29.95	43.50	13.55	100	130	Vertical
4	499.965	18.92	42.87	46.00	3.13	100	195	Vertical
5	594.055	20.27	43.46	46.00	2.54	100	248	Vertical
6	625.095	20.70	43.41	46.00	2.59	100	1	Vertical

Note 1: The test trace is same as the ambient noise and the amplitude of the emissions are attenuated more than 20dB below the permissible (the test frequency range: 9kHz ~ 30MHz, 18GHz ~ 25GHz), therefore no data appear in the report.

EUT:	Taurus-MediaPlayer	Polarity:	Horizontal
Model:	TB60	Power Supply:	2
Mode:	Transmit by 802.11b at Channel 2412MHz	Voltage:	120V/60Hz
Environment:	Temp: 22°C; Humi:55%	Engineer:	Amos Xia

**Test Graph**

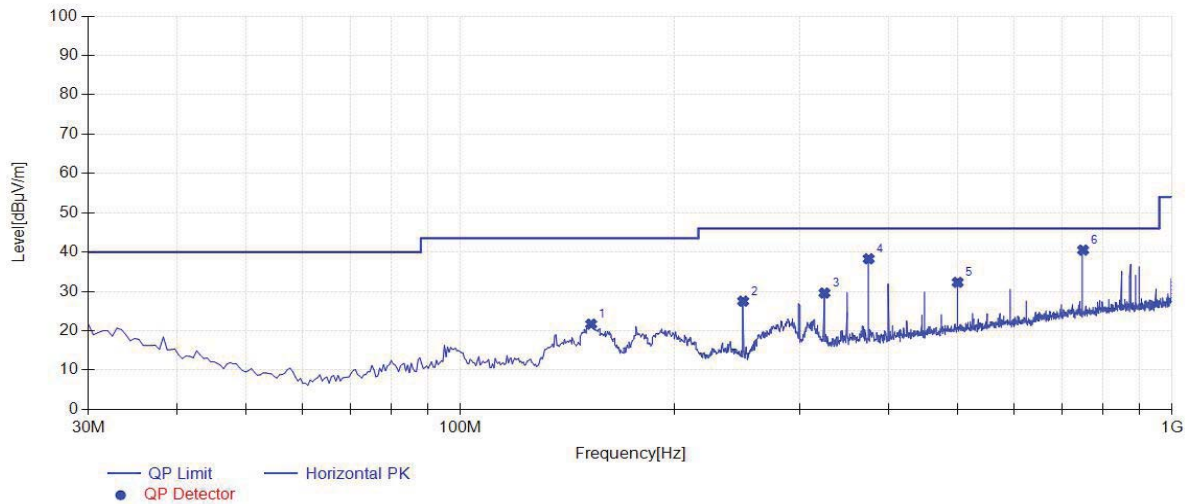


Final Data List								
NO.	Freq. [MHz]	Factor [dB]	QP Value [dBµV/m]	QP Limit [dBµV/m]	QP Margin [dB]	Height [cm]	Angle [°]	Polarity
1	152.705	21.70	10.70	43.50	21.80	100	136	Horizontal
2	249.705	27.53	11.59	46.00	18.47	100	37	Horizontal
3	324.880	29.61	14.34	46.00	16.39	100	50	Horizontal
4	374.835	38.30	15.33	46.00	7.70	100	229	Horizontal
5	499.965	32.31	18.92	46.00	13.69	100	314	Horizontal
6	750.225	40.51	22.67	46.00	5.49	100	246	Horizontal

Note 1: The test trace is same as the ambient noise and the amplitude of the emissions are attenuated more than 20dB below the permissible (the test frequency range: 9kHz ~ 30MHz, 18GHz ~ 25GHz), therefore no data appear in the report.

EUT:	Taurus-MediaPlayer	Polarity:	Vertical
Model:	TB60	Power Supply:	2
Mode:	Transmit by 802.11b at Channel 2412MHz	Voltage:	120V/60Hz
Environment:	Temp: 22°C; Humi:55%	Engineer:	Amos Xia

### Test Graph

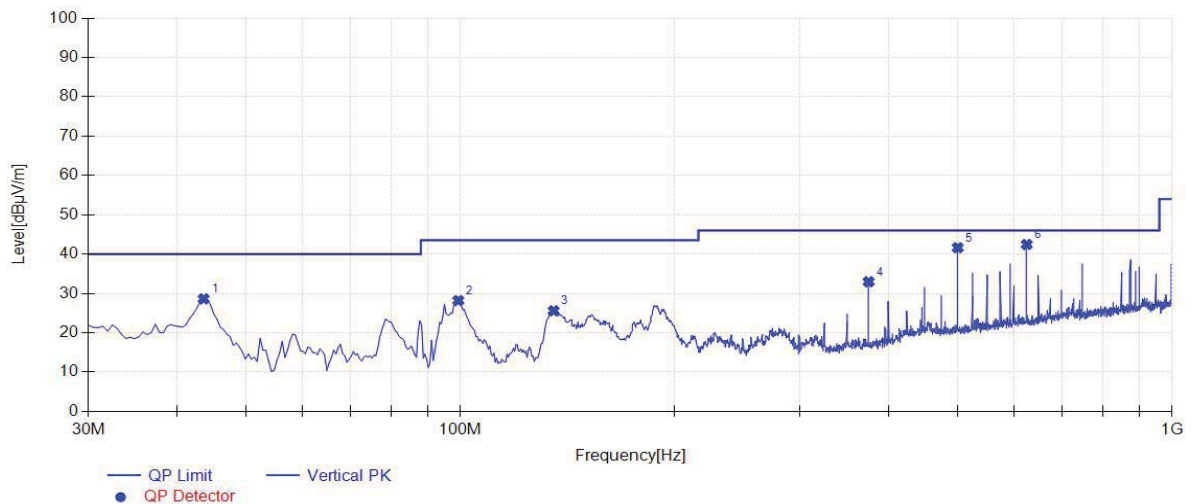


Final Data List								
NO.	Freq. [MHz]	Factor [dB]	QP Value [dBµV/m]	QP Limit [dBµV/m]	QP Margin [dB]	Height [cm]	Angle [°]	Polarity
1	43.5800	28.63	12.80	40.00	11.37	100	235	Vertical
2	99.3550	28.19	11.17	43.50	15.31	100	4	Vertical
3	135.245	25.59	11.43	43.50	17.91	100	264	Vertical
4	374.835	32.98	15.33	46.00	13.02	100	360	Vertical
5	499.965	41.63	18.92	46.00	4.37	100	222	Vertical
6	625.095	42.46	20.70	46.00	3.54	100	175	Vertical

Note 1: The test trace is same as the ambient noise and the amplitude of the emissions are attenuated more than 20dB below the permissible (the test frequency range: 9kHz ~ 30MHz, 18GHz ~ 25GHz), therefore no data appear in the report.

EUT:	Taurus-MediaPlayer	Polarity:	Horizontal
Model:	TB60	Power Supply:	2
Mode:	Transmit by 802.11b at Channel 2437MHz	Voltage:	120V/60Hz
Environment:	Temp: 22°C; Humi:55%	Engineer:	Amos Xia

**Test Graph**

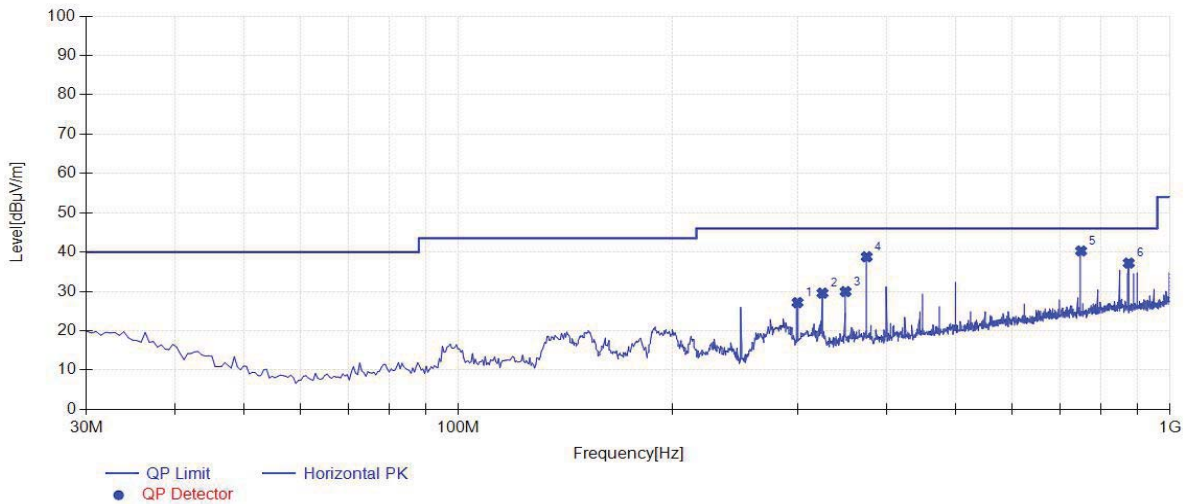


Final Data List								
NO.	Freq. [MHz]	Factor [dB]	QP Value [dBµV/m]	QP Limit [dBµV/m]	QP Margin [dB]	Height [cm]	Angle [°]	Polarity
1	299.660	27.17	13.74	46.00	18.83	100	225	Horizontal
2	324.880	29.57	14.34	46.00	16.43	100	44	Horizontal
3	350.100	29.95	14.90	46.00	16.05	100	233	Horizontal
4	374.835	38.81	15.33	46.00	7.19	100	211	Horizontal
5	750.225	40.29	22.67	46.00	5.71	100	276	Horizontal
6	875.355	37.20	23.82	46.00	8.80	100	320	Horizontal

Note 1: The test trace is same as the ambient noise and the amplitude of the emissions are attenuated more than 20dB below the permissible (the test frequency range: 9kHz ~ 30MHz, 18GHz ~ 25GHz), therefore no data appear in the report.

EUT:	Taurus-MediaPlayer	Polarity:	Vertical
Model:	TB60	Power Supply:	2
Mode:	Transmit by 802.11b at Channel 2437MHz	Voltage:	120V/60Hz
Environment:	Temp: 22°C; Humi:55%	Engineer:	Amos Xia

### Test Graph

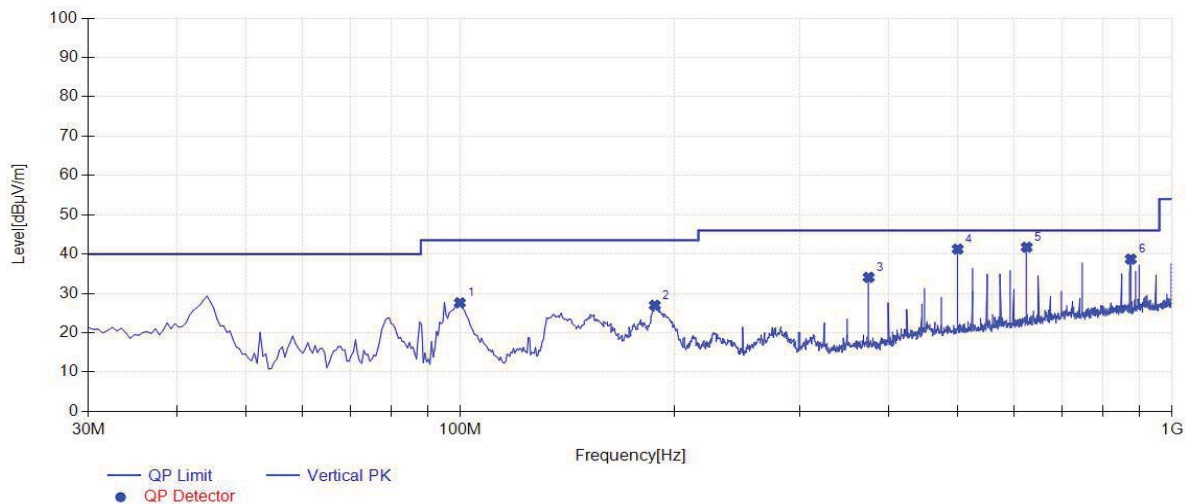


Final Data List								
NO.	Freq. [MHz]	Factor [dB]	QP Value [dBµV/m]	QP Limit [dBµV/m]	QP Margin [dB]	Height [cm]	Angle [°]	Polarity
1	99.8400	27.61	11.23	43.50	15.89	100	4	Vertical
2	187.625	26.99	10.34	43.50	16.51	100	228	Vertical
3	374.835	34.11	15.33	46.00	11.89	100	313	Vertical
4	499.965	41.27	18.92	46.00	4.73	100	221	Vertical
5	625.095	41.75	20.70	46.00	4.25	100	176	Vertical
6	875.355	38.73	23.82	46.00	7.27	100	4	Vertical

Note 1: The test trace is same as the ambient noise and the amplitude of the emissions are attenuated more than 20dB below the permissible (the test frequency range: 9kHz ~ 30MHz, 18GHz ~ 25GHz), therefore no data appear in the report.



EUT:	Taurus-MediaPlayer	Polarity:	Horizontal
Model:	TB60	Power Supply:	2
Mode:	Transmit by 802.11b at Channel 2462MHz	Voltage:	120V/60Hz
Environment:	Temp: 22°C; Humi:55%	Engineer:	Amos Xia

**Test Graph**

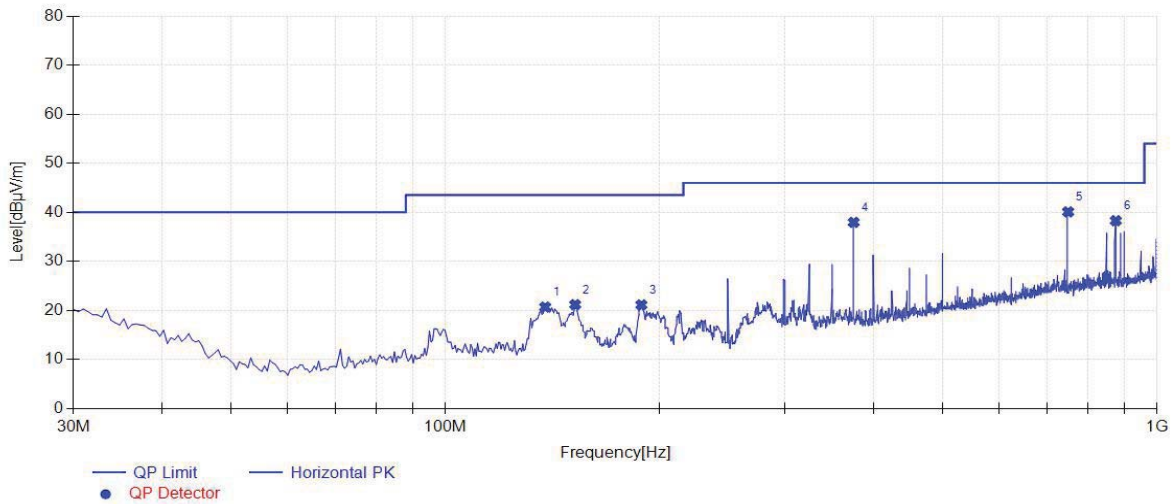


Final Data List								
NO.	Freq. [MHz]	Factor [dB]	QP Value [dBµV/m]	QP Limit [dBµV/m]	QP Margin [dB]	Height [cm]	Angle [°]	Polarity
1	138.155	20.70	11.37	43.50	22.80	100	125	Horizontal
2	152.220	21.19	10.72	43.50	22.31	100	103	Horizontal
3	188.595	21.14	10.28	43.50	22.36	100	293	Horizontal
4	374.835	37.96	15.33	46.00	8.04	100	51	Horizontal
5	750.225	40.10	22.67	46.00	5.90	100	271	Horizontal
6	875.355	38.30	23.82	46.00	7.70	100	315	Horizontal

Note 1: The test trace is same as the ambient noise and the amplitude of the emissions are attenuated more than 20dB below the permissible (the test frequency range: 9kHz ~ 30MHz, 18GHz ~ 25GHz), therefore no data appear in the report.

EUT:	Taurus-MediaPlayer	Polarity:	Vertical
Model:	TB60	Power Supply:	2
Mode:	Transmit by 802.11b at Channel 2462MHz	Voltage:	120V/60Hz
Environment:	Temp: 22°C; Humi:55%	Engineer:	Amos Xia

### Test Graph

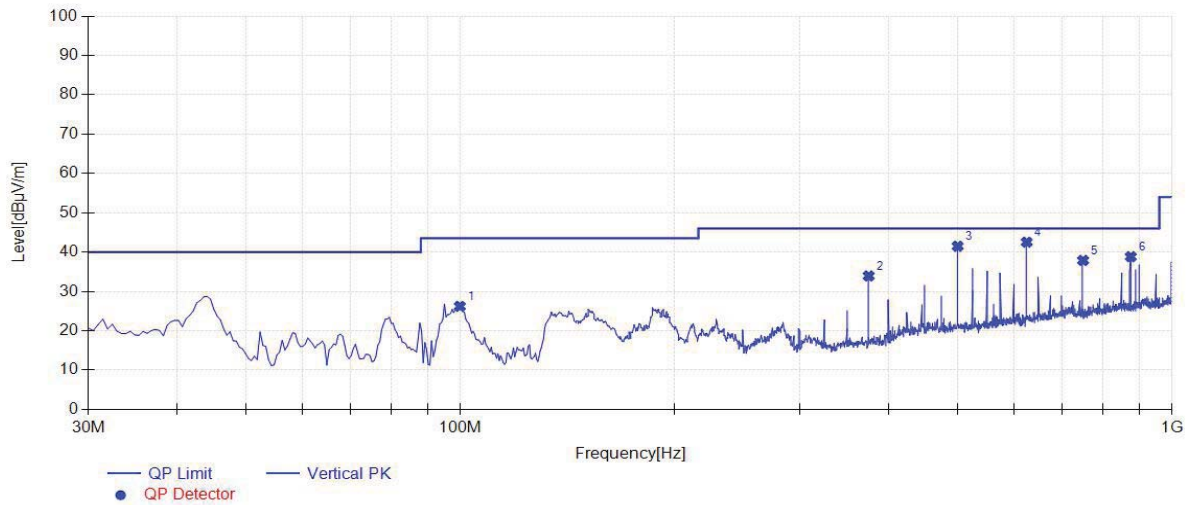

Final Data List								
NO.	Freq. [MHz]	Factor [dB]	QP Value [dBµV/m]	QP Limit [dBµV/m]	QP Margin [dB]	Height [cm]	Angle [°]	Polarity
1	99.8400	26.22	11.23	43.50	17.28	100	3	Vertical
2	374.835	33.95	15.33	46.00	12.05	100	293	Vertical
3	499.965	41.50	18.92	46.00	4.50	100	221	Vertical
4	625.095	42.54	20.70	46.00	3.46	100	147	Vertical
5	750.225	37.88	22.67	46.00	8.12	100	344	Vertical
6	875.355	38.83	23.82	46.00	7.17	100	357	Vertical

Note 1: The test trace is same as the ambient noise and the amplitude of the emissions are attenuated more than 20dB below the permissible (the test frequency range: 9kHz ~ 30MHz, 18GHz ~ 25GHz), therefore no data appear in the report.

## 7.7. Radiated Restricted Band Edge Measurement

### 7.7.1. Test Limit

#### For 15.205 requirement:

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a) of FCC part 15, must also comply with the radiated emission limits specified in Section 15.209(a).

Frequency (MHz)	Frequency (MHz)	Frequency (MHz)	Frequency (GHz)
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
<sup>1</sup> 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.25 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	( <sup>2</sup> )
13.36 - 13.41	--	--	--

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47CFR must not exceed the limits shown in Table per Section 15.209.

<b>FCC Part 15 Subpart C Paragraph 15.209</b>		
Frequency [MHz]	Field Strength [uV/m]	Measured Distance [Meters]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

**For RSS-Gen Section 8.10 requirement:**

Radiated emissions which fall in the restricted bands, as defined in Section 8.10 of RSS-Gen, must also comply with the radiated emission limits specified in Section 8.9.

Frequency (MHz)	Frequency (MHz)	Frequency (GHz)
0.009 - 0.110	240 - 285	9.0 - 9.2
2.1735 - 2.1905	322 - 335.4	9.3 - 9.5
3.020 - 3.026	399.9 - 410	10.6 - 12.7
4.125 - 4.128	608 - 614	13.25 - 13.4
4.17725 - 4.17775	960 - 1427	14.47 - 14.5
4.20725 - 4.20775	1435 - 1626.5	15.35 - 16.2
5.677 - 5.683	1645.5 - 1646.5	17.7 - 21.4
6.215 - 6.218	1660 - 1710	22.01 - 23.12
6.26775 - 6.26825	1718.8 - 1722.2	23.6 - 24.0
6.31175 - 6.31225	2200 - 2300	31.2 - 31.8
8.291 - 8.294	2310 - 2390	36.43 - 36.5
8.362 - 8.366	2655 - 2900	Above 38.6
8.37625 - 8.38675	3260 - 3267	--
8.41425 - 8.41475	3332 - 3339	
12.29 - 12.293	334.5 - 3358	
12.51975 - 12.52025	3500 - 4400	
12.57675 - 12.57725	4500 - 5150	
13.36 - 13.41	5350 - 5460	
16.42 - 16.423	7250 - 7750	
16.69475 - 16.69525	8025 - 8500	
16.80425 - 16.80475	--	
25.5 - 25.67		
37.5 - 38.25		
73 - 74.6		
74.8 - 75.2		
108 - 138		
156.52475 - 156.525225		
156.7 - 156.9		

All out of band emissions appearing in a restricted band as specified in Section 8.10 of the RSS-Gen

must not exceed the limits shown in Table per Section 8.9.

RSS-Gen Section 8.9		
Frequency [MHz]	Field Strength [uV/m]	Measured Distance [Meters]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

### 7.7.2. Test Procedure Used

ANSI C63.10 Section 6.3 (General Requirements)

ANSI C63.10 Section 6.6 (Standard test method above 1GHz)

### 7.7.3. Test Setting


#### Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

### Average Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = Power Average (RMS)
5. Number of sweep point = 2001 (Number of sweep points must be  $\geq 2 \times \text{span} / \text{RBW}$ )
6. Sweep time = auto
7. Trace (RMS) averaging was performed over at least 100 traces.

#### 7.7.4. Test Setup

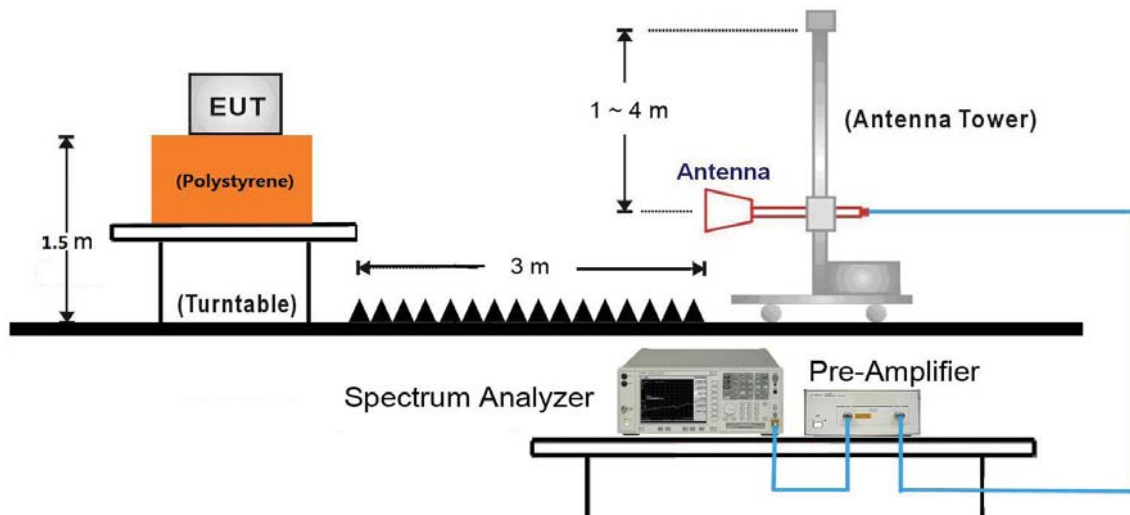


Note: This item was performed with the WIFI antenna connected.

### 7.7.5. Test Result

Project Information			
EUT:	Taurus-MediaPlayer	Model:	TB60
Power Supply:	1	Voltage:	AC 120V/60Hz
Environment:	Temp: 25°C; Humi:60%	Engineer:	Amos Xia
Remark:	Transmit by 802.11b at Channel 2412MHz		

Start of Test:2021-09-02 11:18:52

#### Test Graph

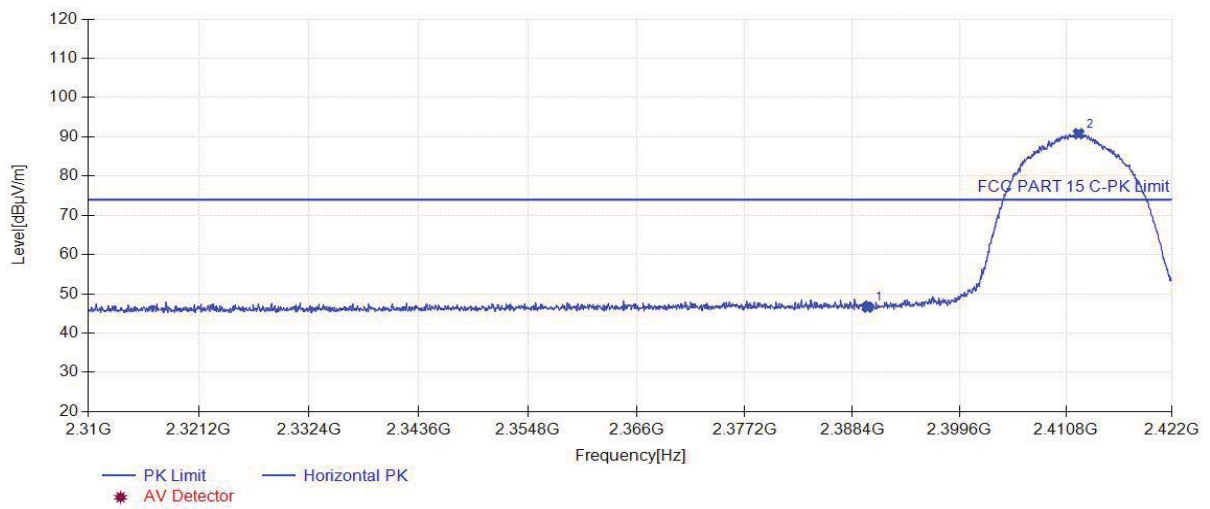


Suspected Data List								
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	2390.00	46.63	34.25	74.00	27.37	160	208	Horizontal
2	2412.14	90.80	34.38	N/A	N/A	160	294	Horizontal



Project Information			
EUT:	Taurus-MediaPlayer	Model:	TB60
Power Supply:	1	Voltage:	AC 120V/60Hz
Environment:	Temp: 25°C; Humi:60%	Engineer:	Amos Xia
Remark:	Transmit by 802.11b at Channel 2412MHz		

Start of Test:2021-09-02 11:19:45

**Test Graph**

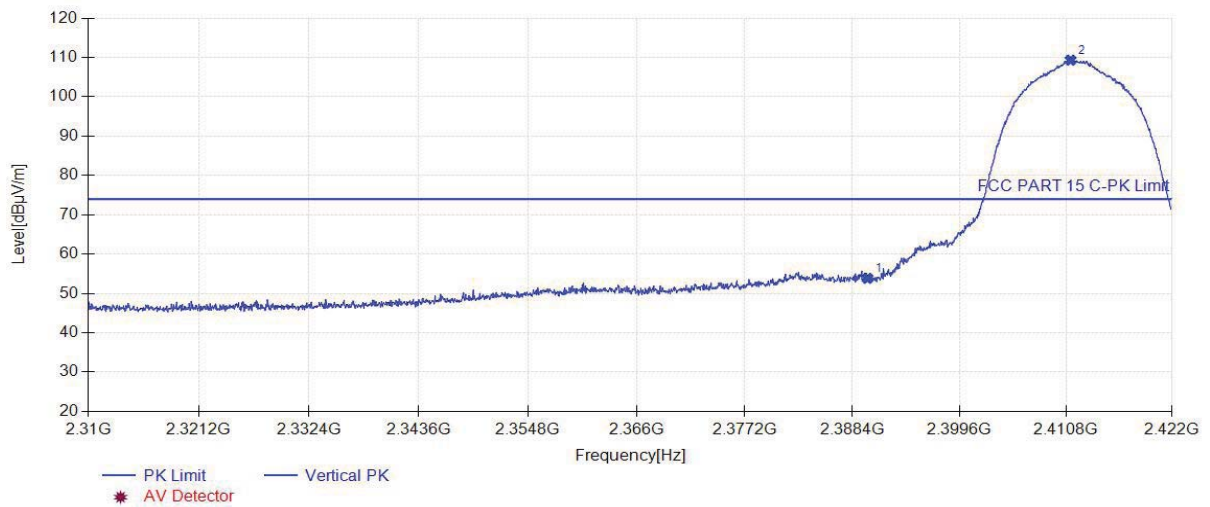


Suspected Data List								
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	2390.00	53.84	34.25	74.00	20.16	160	360	Vertical
2	2411.30	109.30	34.37	N/A	N/A	160	153	Vertical

Project Information			
EUT:	Taurus-MediaPlayer	Model:	TB60
Power Supply:	1	Voltage:	AC 120V/60Hz
Environment:	Temp: 25°C; Humi:60%	Engineer:	Amos Xia
Remark:	Transmit by 802.11b at Channel 2412MHz		

Start of Test:2021-09-02 11:22:33

**Test Graph**

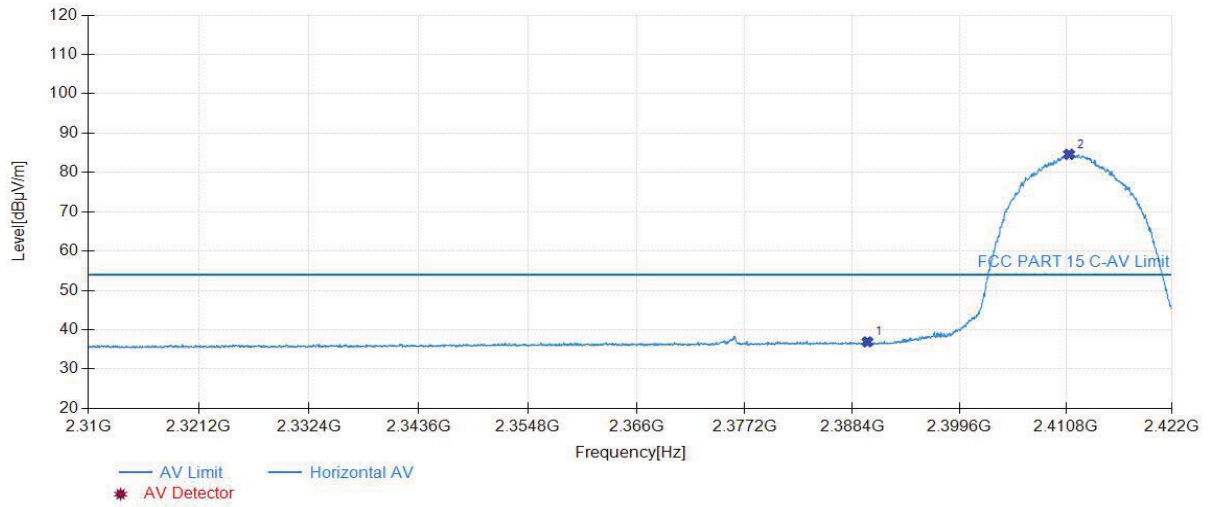


Suspected Data List								
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	2390.00	36.93	34.25	54.00	17.07	160	1	Horizontal
2	2411.13	84.60	34.37	N/A	N/A	160	70	Horizontal

Project Information			
EUT:	Taurus-MediaPlayer	Model:	TB60
Power Supply:	1	Voltage:	AC 120V/60Hz
Environment:	Temp: 25°C; Humi:60%	Engineer:	Amos Xia
Remark:	Transmit by 802.11b at Channel 2412MHz		

Start of Test:2021-09-02 11:23:41

**Test Graph**

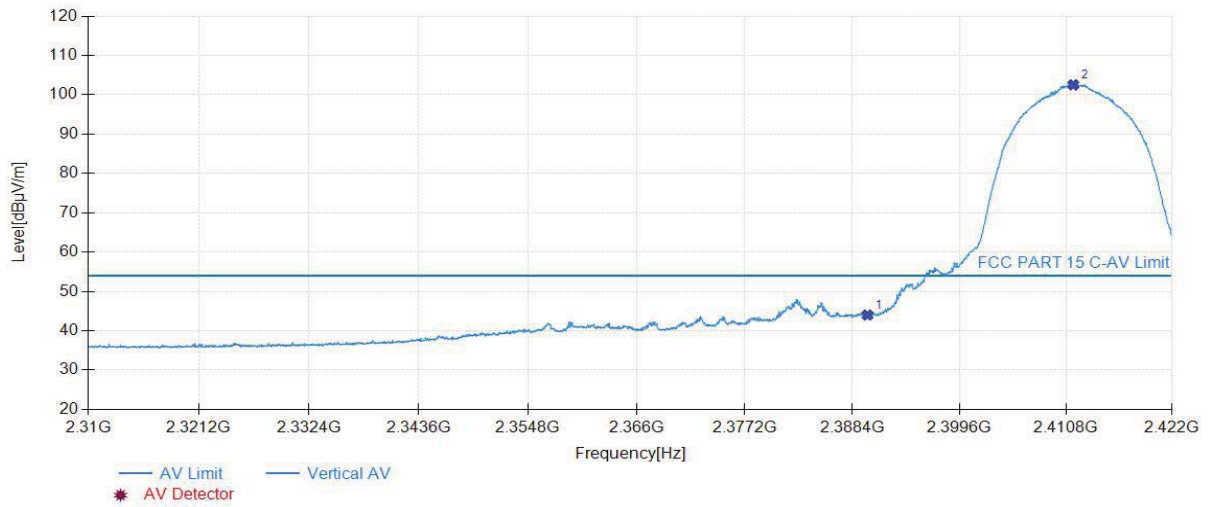


Suspected Data List								
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	2390.00	44.01	34.25	54.00	9.99	160	340	Vertical
2	2411.58	102.52	34.37	N/A	N/A	160	32	Vertical

Project Information			
EUT:	Taurus-MediaPlayer	Model:	TB60
Power Supply:	1	Voltage:	AC 120V/60Hz
Environment:	Temp: 25°C; Humi:60%	Engineer:	Amos Xia
Remark:	Transmit by 802.11b at Channel 2462MHz		

Start of Test:2021-09-02 14:43:05

### Test Graph

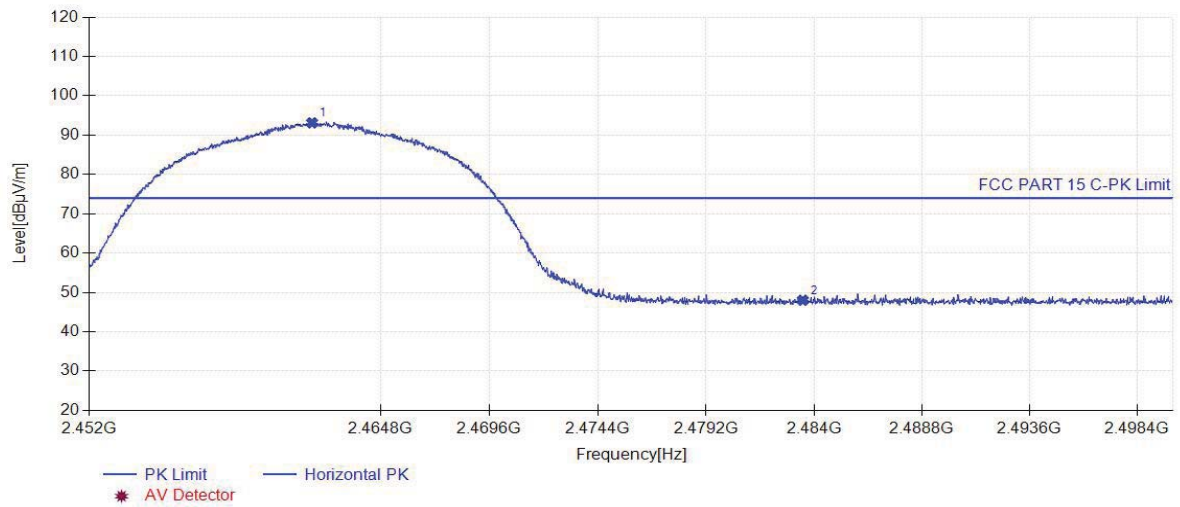


Suspected Data List								
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	2461.79	93.12	34.63	N/A	N/A	160	24	Horizontal
2	2483.50	48.02	34.65	74.00	25.98	160	139	Horizontal

Project Information			
EUT:	Taurus-MediaPlayer	Model:	TB60
Power Supply:	1	Voltage:	AC 120V/60Hz
Environment:	Temp: 25°C; Humi:60%	Engineer:	Amos Xia
Remark:	Transmit by 802.11b at Channel 2462MHz		

Start of Test:2021-09-02 14:43:58

**Test Graph**

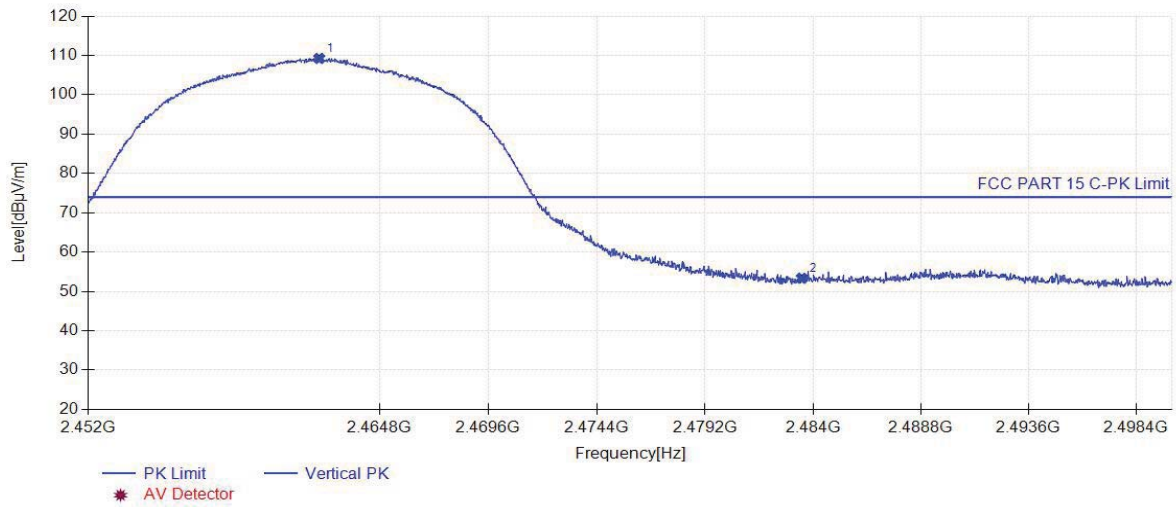


Suspected Data List								
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	2462.15	109.23	34.63	N/A	N/A	160	345	Vertical
2	2483.50	53.35	34.65	74.00	20.65	160	339	Vertical

Project Information			
EUT:	Taurus-MediaPlayer	Model:	TB60
Power Supply:	1	Voltage:	AC 120V/60Hz
Environment:	Temp: 25°C; Humi:60%	Engineer:	Amos Xia
Remark:	Transmit by 802.11b at Channel 2462MHz		

Start of Test:2021-09-02 14:37:34

**Test Graph**

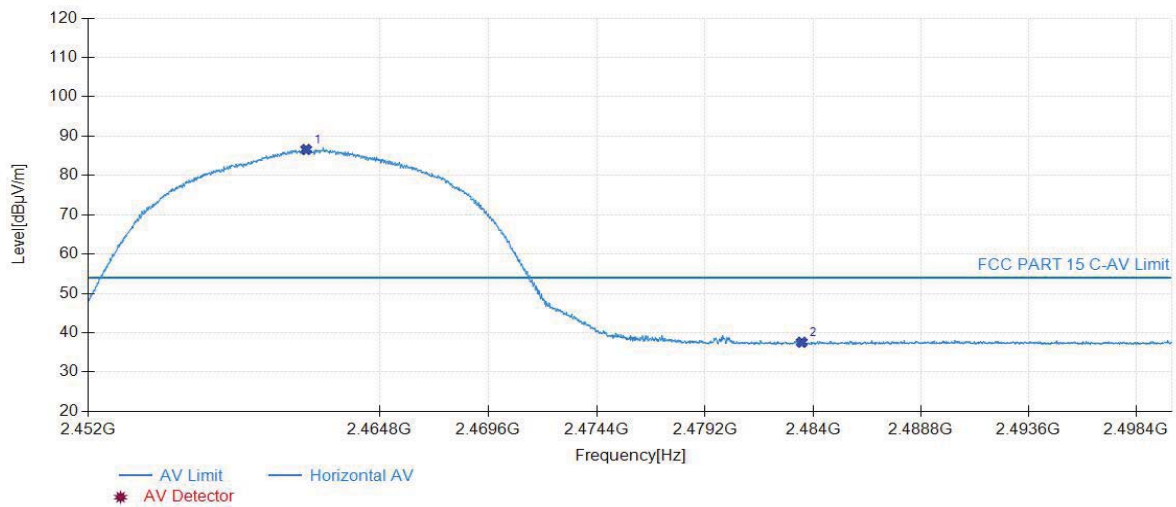


Suspected Data List								
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	2461.57	86.58	34.63	N/A	N/A	160	26	Horizontal
2	2483.50	37.58	34.65	54.00	16.42	160	33	Horizontal

Project Information			
EUT:	Taurus-MediaPlayer	Model:	TB60
Power Supply:	1	Voltage:	AC 120V/60Hz
Environment:	Temp: 25°C; Humi:60%	Engineer:	Amos Xia
Remark:	Transmit by 802.11b at Channel 2462MHz		

Start of Test:2021-09-02 14:38:27

**Test Graph**

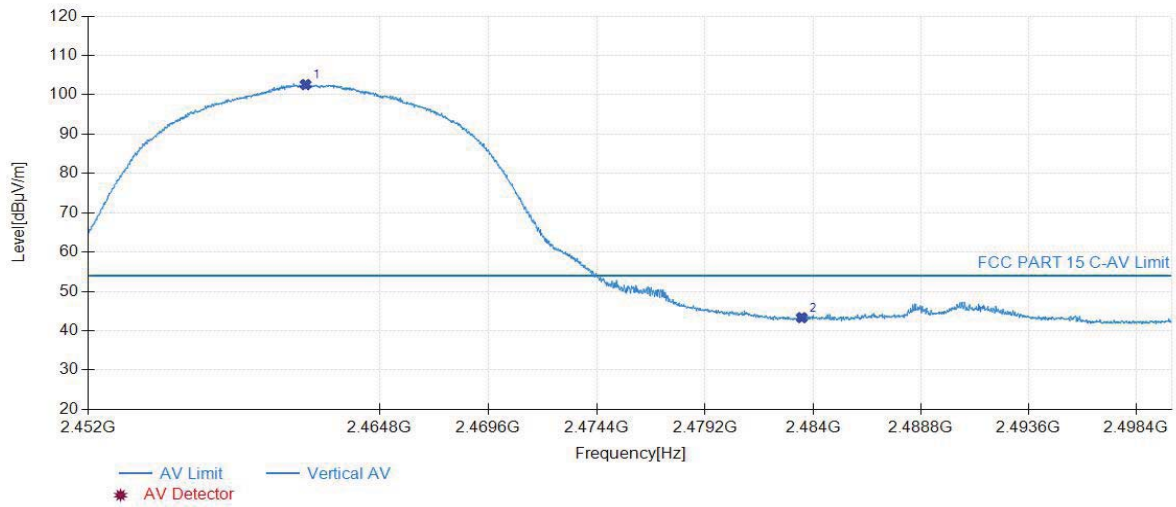


Suspected Data List								
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	2461.55	102.60	34.63	N/A	N/A	160	338	Vertical
2	2483.50	43.34	34.65	54.00	10.66	160	338	Vertical

Project Information			
EUT:	Taurus-MediaPlayer	Model:	TB60
Power Supply:	1	Voltage:	AC 120V/60Hz
Environment:	Temp: 25°C; Humi:60%	Engineer:	Amos Xia
Remark:	Transmit by 802.11g at Channel 2412MHz		

Start of Test:2021-09-02 15:00:35

**Test Graph**

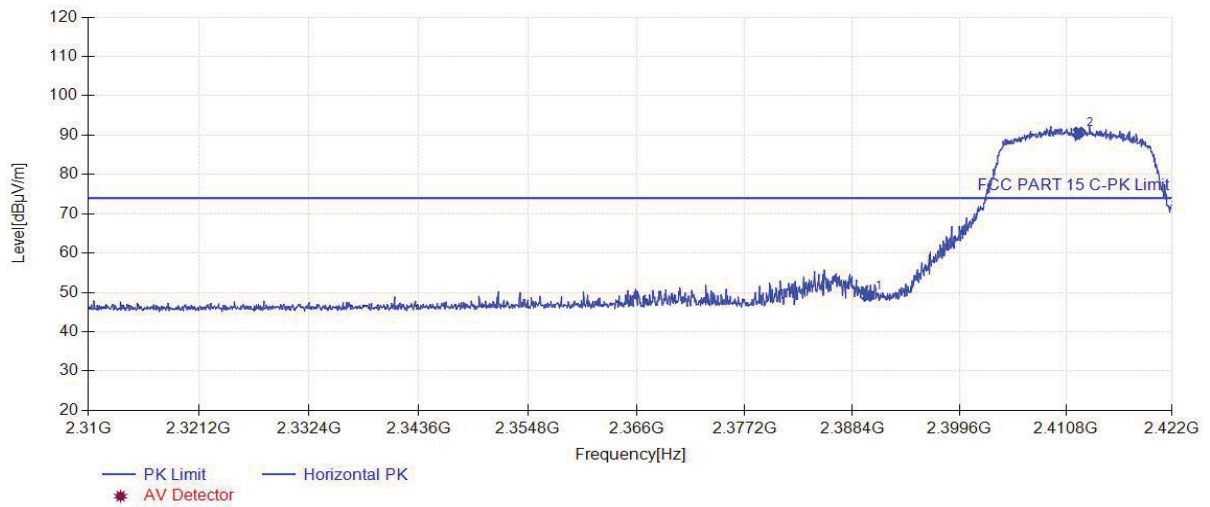


Suspected Data List								
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	2390.00	49.08	34.25	74.00	24.92	160	1	Horizontal
2	2412.14	90.73	34.38	N/A	N/A	160	207	Horizontal



Project Information			
EUT:	Taurus-MediaPlayer	Model:	TB60
Power Supply:	1	Voltage:	AC 120V/60Hz
Environment:	Temp: 25°C; Humi:60%	Engineer:	Amos Xia
Remark:	Transmit by 802.11g at Channel 2412MHz		

Start of Test:2021-09-02 15:01:27

**Test Graph**

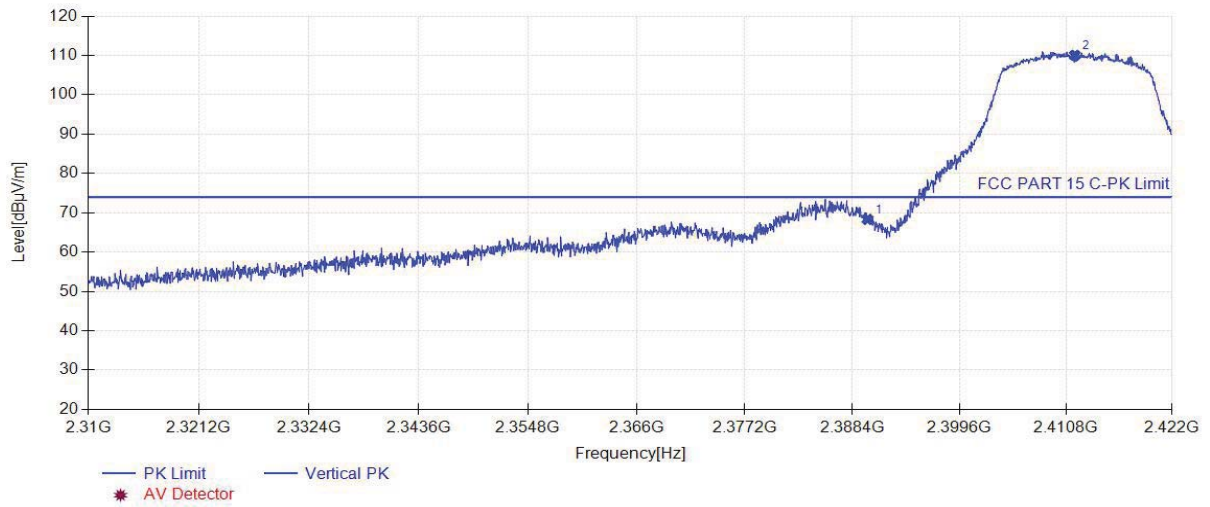


Suspected Data List								
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	2390.00	68.32	34.25	74.00	5.68	160	241	Vertical
2	2411.75	110.06	34.38	N/A	N/A	160	229	Vertical

Project Information			
EUT:	Taurus-MediaPlayer	Model:	TB60
Power Supply:	1	Voltage:	AC 120V/60Hz
Environment:	Temp: 25°C; Humi:60%	Engineer:	Amos Xia
Remark:	Transmit by 802.11g at Channel 2412MHz		

Start of Test:2021-09-02 15:03:18

**Test Graph**

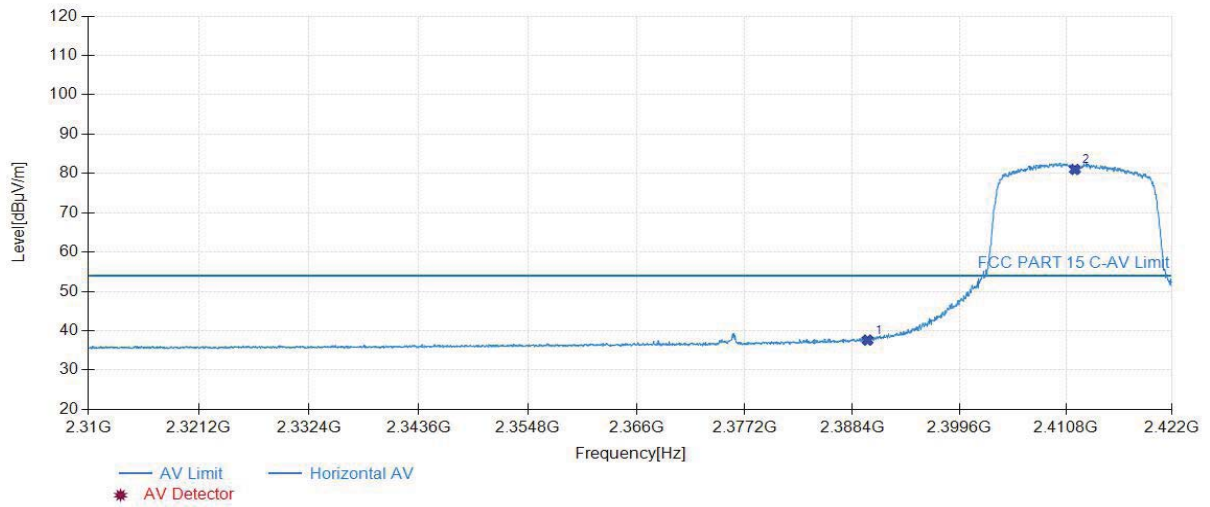


Suspected Data List								
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	2390.00	37.62	34.25	54.00	16.38	160	8	Horizontal
2	2411.75	81.03	34.38	N/A	N/A	160	179	Horizontal

Project Information			
EUT:	Taurus-MediaPlayer	Model:	TB60
Power Supply:	1	Voltage:	AC 120V/60Hz
Environment:	Temp: 25°C; Humi:60%	Engineer:	Amos Xia
Remark:	Transmit by 802.11g at Channel 2412MHz		

Start of Test:2021-09-02 15:04:10

**Test Graph**

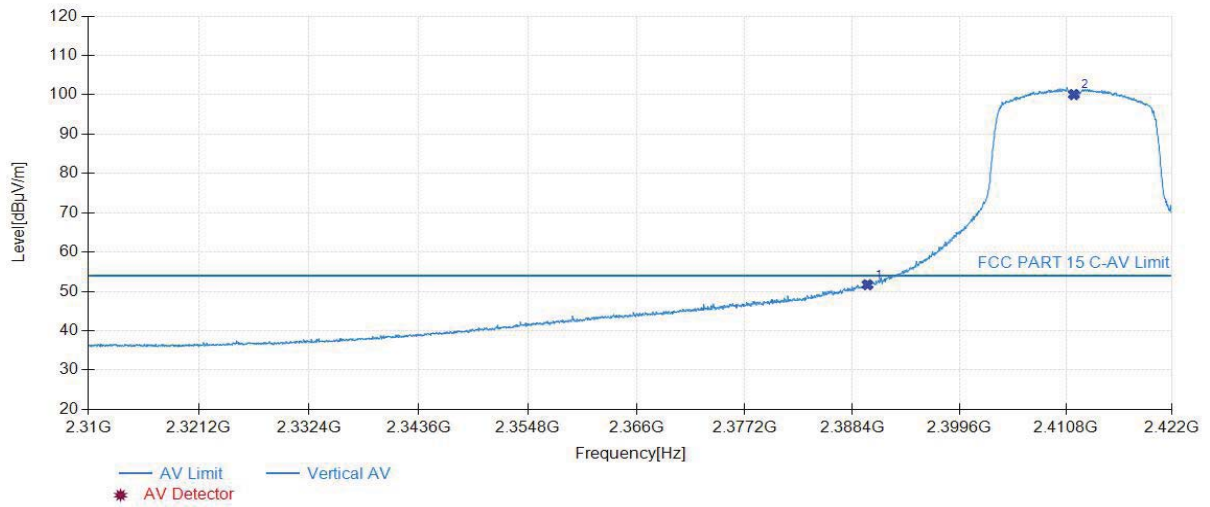


Suspected Data List								
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	2390.00	51.71	34.25	54.00	2.29	160	334	Vertical
2	2411.64	100.06	34.37	N/A	N/A	160	32	Vertical

Project Information			
EUT:	Taurus-MediaPlayer	Model:	TB60
Power Supply:	1	Voltage:	AC 120V/60Hz
Environment:	Temp: 25°C; Humi:60%	Engineer:	Amos Xia
Remark:	Transmit by 802.11g at Channel 2462MHz		

Start of Test:2021-09-02 15:23:21

**Test Graph**

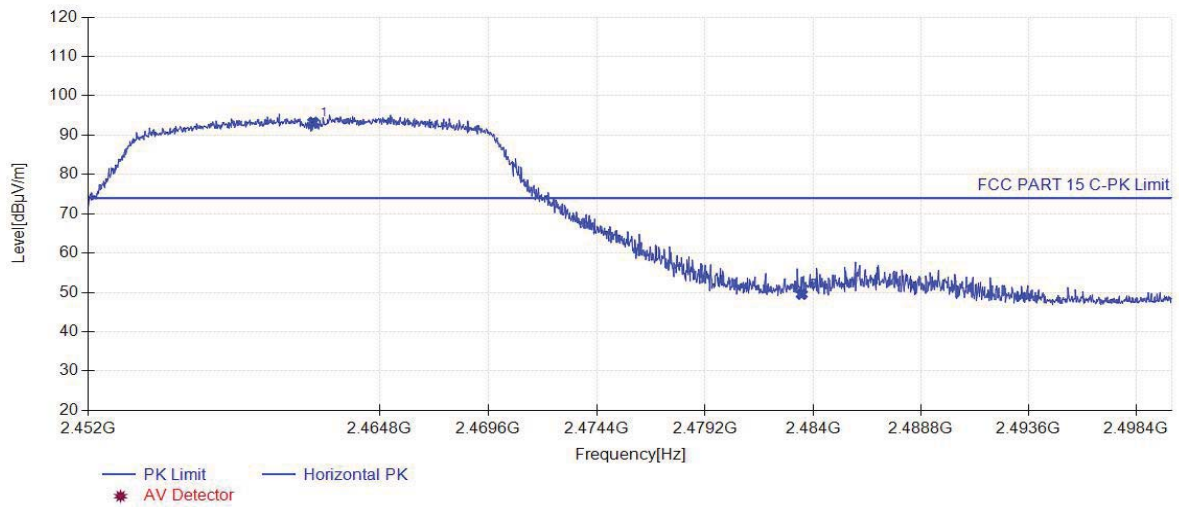


Suspected Data List								
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	2461.88	93.27	34.63	N/A	N/A	160	29	Horizontal
2	2483.50	49.54	34.65	74.00	24.46	160	211	Horizontal

Project Information			
EUT:	Taurus-MediaPlayer	Model:	TB60
Power Supply:	1	Voltage:	AC 120V/60Hz
Environment:	Temp: 25°C; Humi:60%	Engineer:	Amos Xia
Remark:	Transmit by 802.11g at Channel 2462MHz		

Start of Test:2021-09-02 15:24:14

**Test Graph**

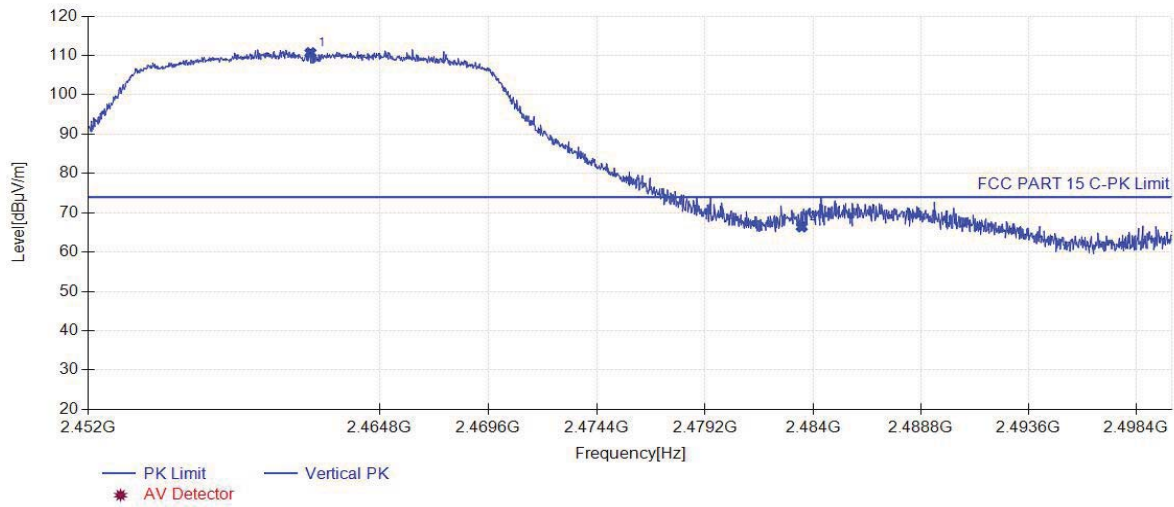


Suspected Data List								
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	2461.76	110.67	34.63	N/A	N/A	160	347	Vertical
2	2483.50	66.44	34.65	74.00	7.56	160	356	Vertical

Project Information			
EUT:	Taurus-MediaPlayer	Model:	TB60
Power Supply:	1	Voltage:	AC 120V/60Hz
Environment:	Temp: 25°C; Humi:60%	Engineer:	Amos Xia
Remark:	Transmit by 802.11g at Channel 2462MHz		

Start of Test:2021-09-02 15:25:44

**Test Graph**

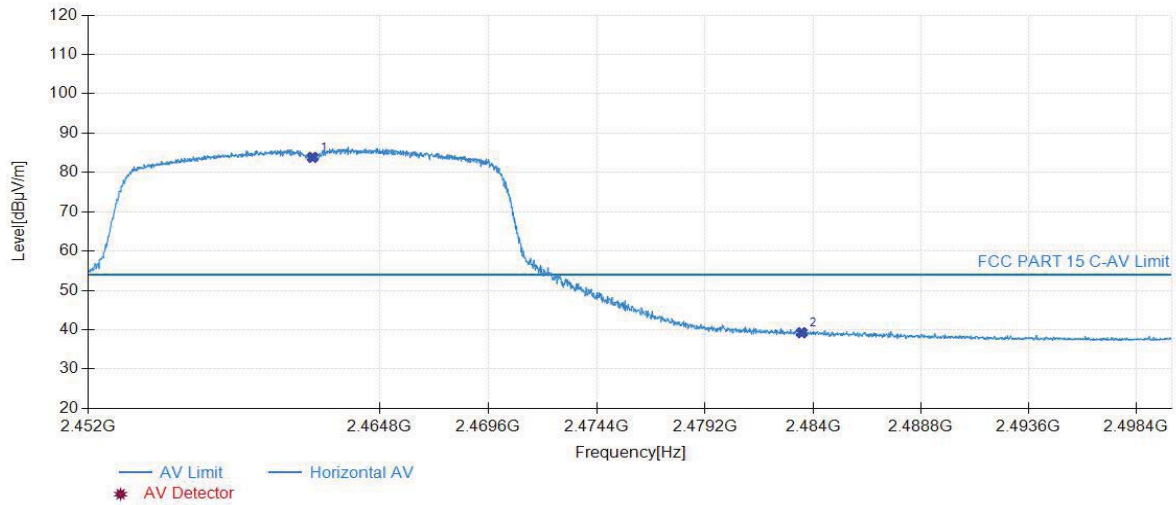


Suspected Data List								
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	2461.86	83.84	34.63	N/A	N/A	160	25	Horizontal
2	2483.50	39.25	34.65	54.00	14.75	160	25	Horizontal

Project Information			
EUT:	Taurus-MediaPlayer	Model:	TB60
Power Supply:	1	Voltage:	AC 120V/60Hz
Environment:	Temp: 25°C; Humi:60%	Engineer:	Amos Xia
Remark:	Transmit by 802.11g at Channel 2462MHz		

Start of Test:2021-09-02 15:26:37

**Test Graph**

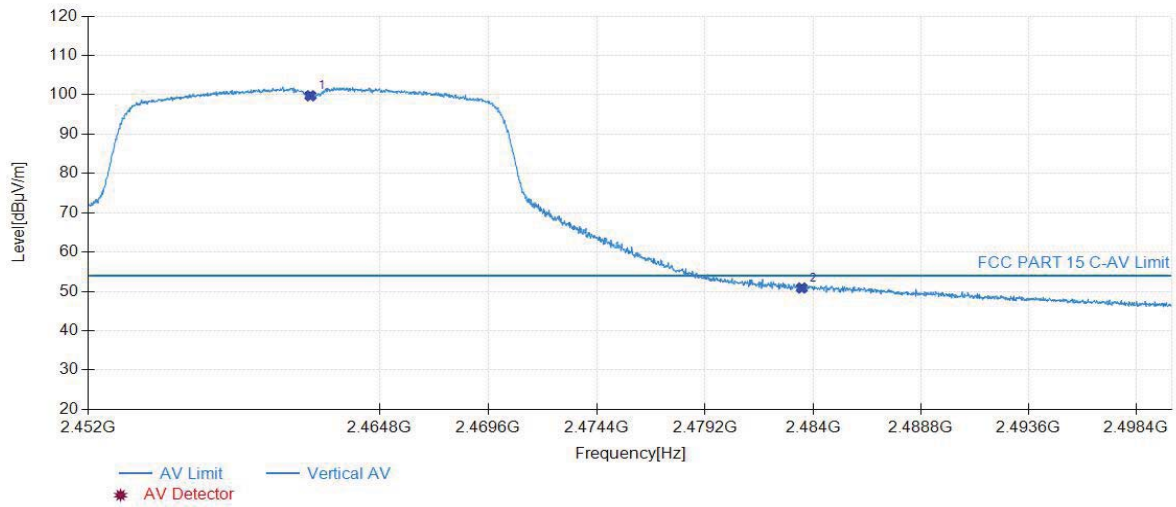


Suspected Data List								
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	2461.76	99.75	34.63	N/A	N/A	160	350	Vertical
2	2483.50	50.87	34.65	54.00	3.13	160	344	Vertical

Project Information			
EUT:	Taurus-MediaPlayer	Model:	TB60
Power Supply:	1	Voltage:	AC 120V/60Hz
Environment:	Temp: 25°C; Humi:60%	Engineer:	Amos Xia
Remark:	Transmit by 802.11n-HT20 at Channel 2412MHz		

Start of Test:2021-09-02 15:32:45

**Test Graph**

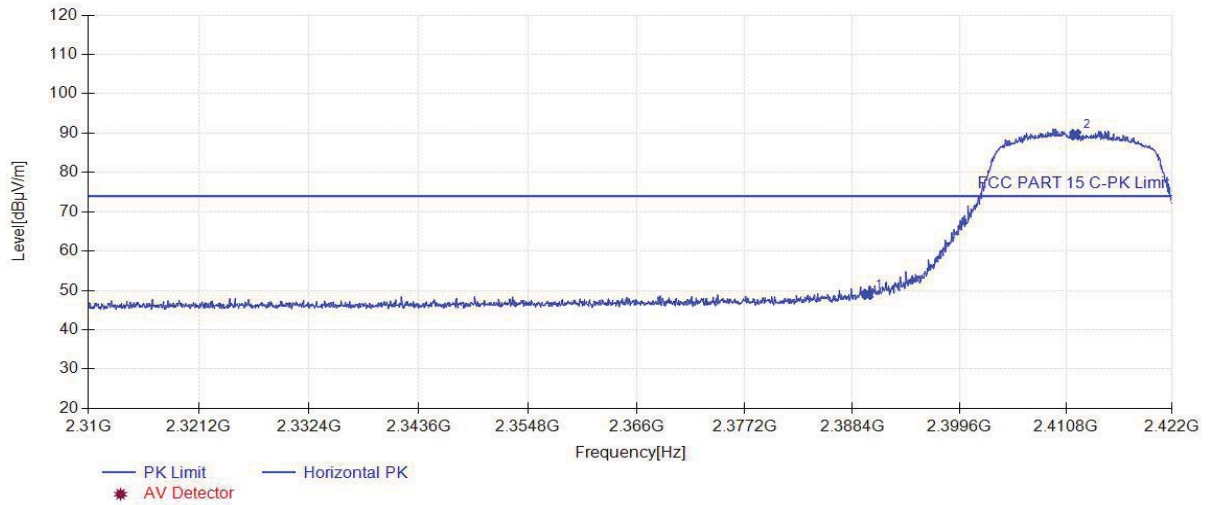


Suspected Data List								
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	2390.00	49.00	34.25	74.00	25.00	160	213	Horizontal
2	2411.80	89.60	34.38	N/A	N/A	160	4	Horizontal



Project Information			
EUT:	Taurus-MediaPlayer	Model:	TB60
Power Supply:	1	Voltage:	AC 120V/60Hz
Environment:	Temp: 25°C; Humi:60%	Engineer:	Amos Xia
Remark:	Transmit by 802.11n-HT20 at Channel 2412MHz		

Start of Test:2021-09-02 15:33:38

**Test Graph**

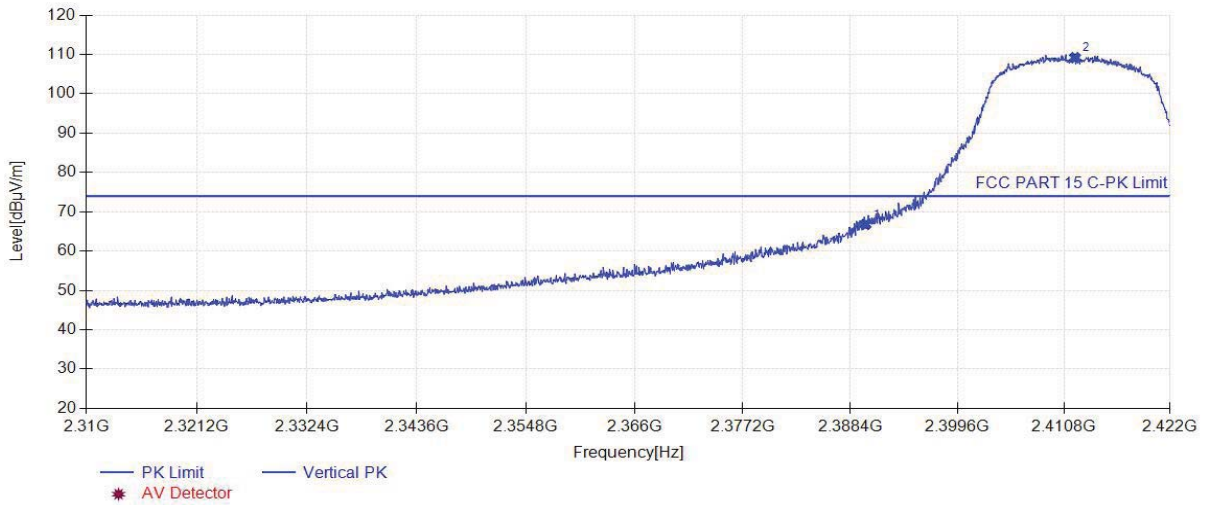


Suspected Data List								
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	2390.00	66.77	34.25	74.00	7.23	160	32	Vertical
2	2411.97	109.18	34.38	N/A	N/A	160	161	Vertical

Project Information			
EUT:	Taurus-MediaPlayer	Model:	TB60
Power Supply:	1	Voltage:	AC 120V/60Hz
Environment:	Temp: 25°C; Humi:60%	Engineer:	Amos Xia
Remark:	Transmit by 802.11n-HT20 at Channel 2412MHz		

Start of Test:2021-09-02 15:35:01

### Test Graph

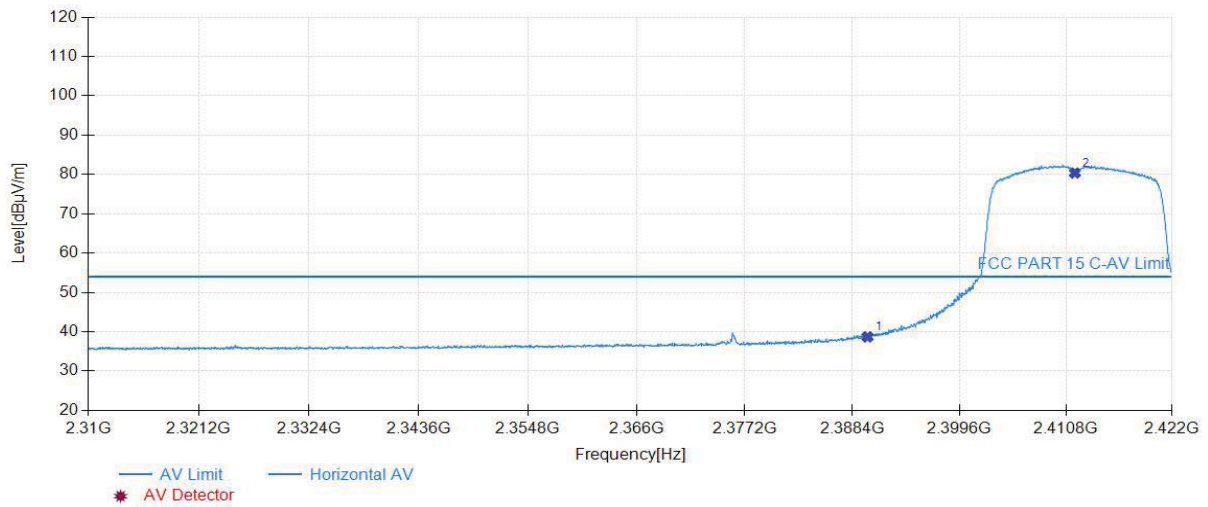


Suspected Data List								
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	2390.00	38.71	34.25	54.00	15.29	160	207	Horizontal
2	2411.75	80.37	34.38	N/A	N/A	160	8	Horizontal

Project Information			
EUT:	Taurus-MediaPlayer	Model:	TB60
Power Supply:	1	Voltage:	AC 120V/60Hz
Environment:	Temp: 25°C; Humi:60%	Engineer:	Amos Xia
Remark:	Transmit by 802.11n-HT20 at Channel 2412MHz		

Start of Test:2021-09-02 15:35:53

**Test Graph**

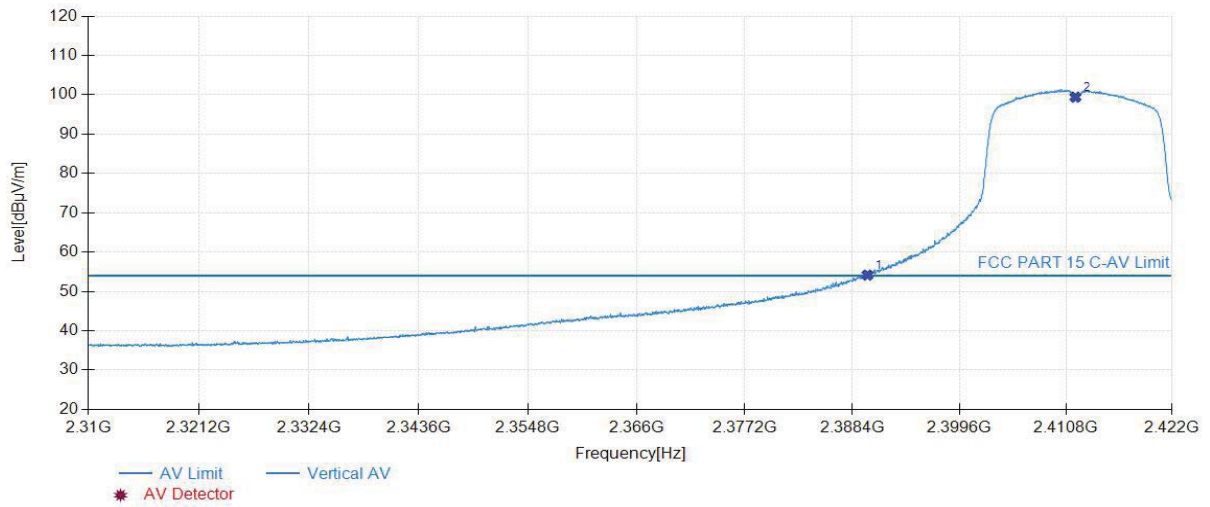


Suspected Data List								
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	2390.00	53.85	34.25	54.00	0.15	160	342	Vertical
2	2411.80	99.40	34.38	N/A	N/A	160	38	Vertical

Project Information			
EUT:	Taurus-MediaPlayer	Model:	TB60
Power Supply:	1	Voltage:	AC 120V/60Hz
Environment:	Temp: 25°C; Humi:60%	Engineer:	Amos Xia
Remark:	Transmit by 802.11n-HT20 at Channel 2462MHz		

Start of Test:2021-09-02 15:42:39

**Test Graph**

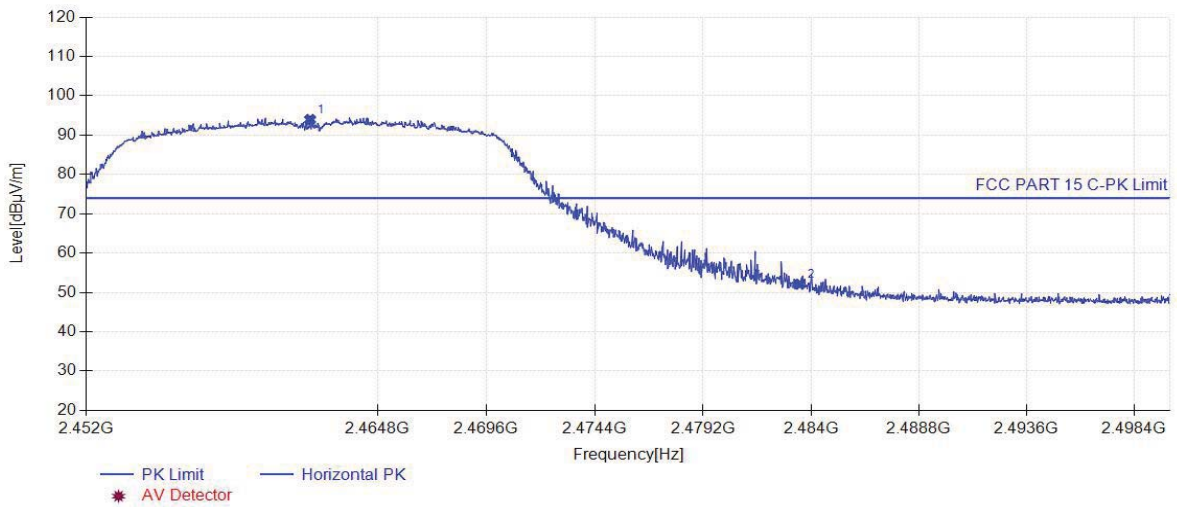


Suspected Data List								
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	2461.84	93.94	34.63	N/A	N/A	160	20	Horizontal
2	2483.50	52.11	34.65	74.00	21.89	160	20	Horizontal

Project Information			
EUT:	Taurus-MediaPlayer	Model:	TB60
Power Supply:	1	Voltage:	AC 120V/60Hz
Environment:	Temp: 25°C; Humi:60%	Engineer:	Amos Xia
Remark:	Transmit by 802.11n-HT20 at Channel 2462MHz		

Start of Test:2021-09-02 15:43:31

**Test Graph**

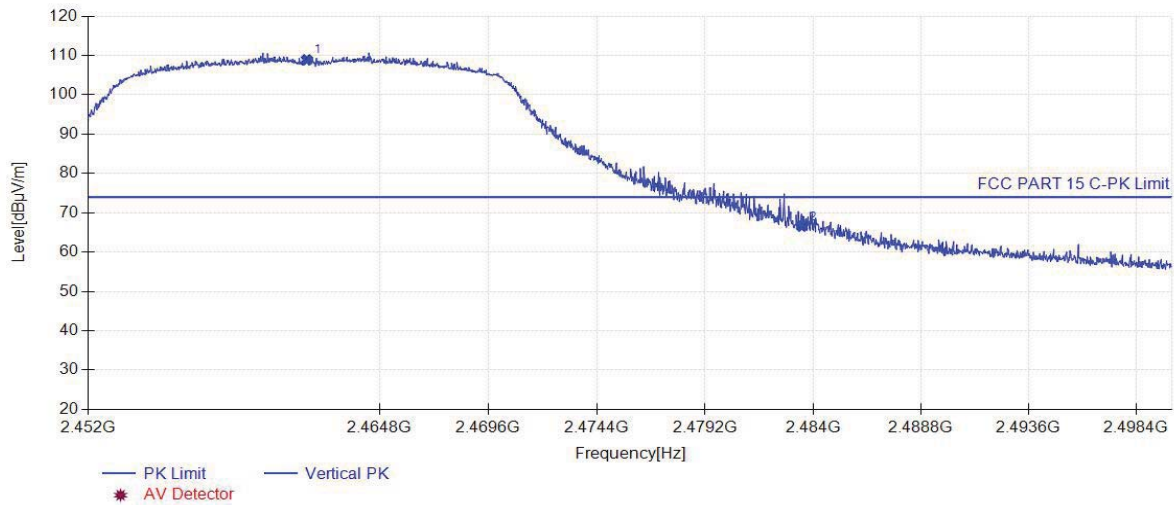


Suspected Data List								
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	2461.60	108.90	34.63	N/A	N/A	160	338	Vertical
2	2483.50	66.59	34.65	74.00	7.41	160	91	Vertical

Project Information			
EUT:	Taurus-MediaPlayer	Model:	TB60
Power Supply:	1	Voltage:	AC 120V/60Hz
Environment:	Temp: 25°C; Humi:60%	Engineer:	Amos Xia
Remark:	Transmit by 802.11n-HT20 at Channel 2462MHz		

Start of Test:2021-09-02 15:47:19

**Test Graph**

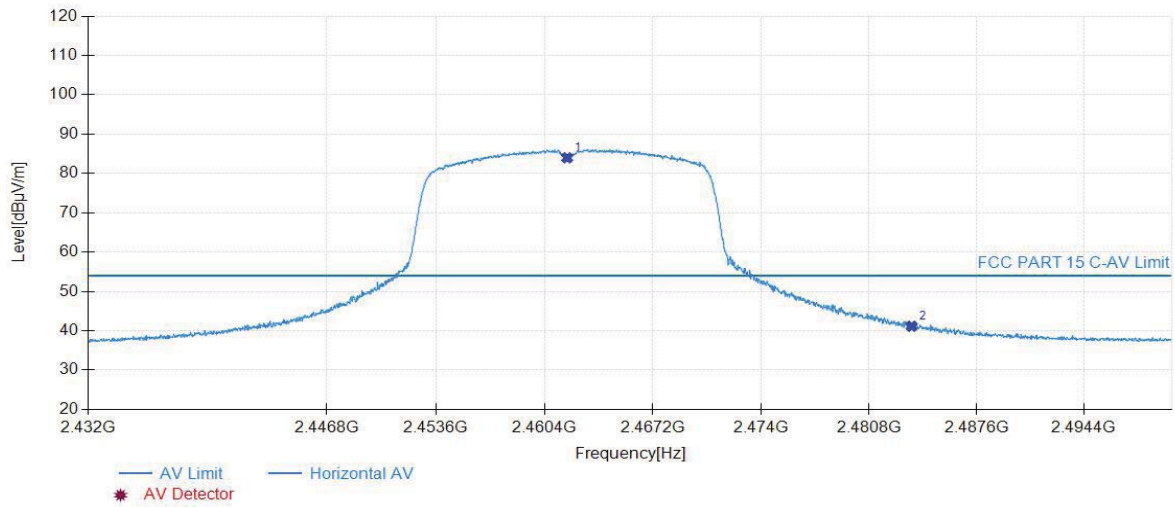


Suspected Data List								
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	2461.81	83.97	34.63	N/A	N/A	160	19	Horizontal
2	2483.50	41.15	34.65	54.00	12.85	160	26	Horizontal

Project Information			
EUT:	Taurus-MediaPlayer	Model:	TB60
Power Supply:	1	Voltage:	AC 120V/60Hz
Environment:	Temp: 25°C; Humi:60%	Engineer:	Amos Xia
Remark:	Transmit by 802.11n-HT20 at Channel 2462MHz		

Start of Test:2021-09-02 15:48:12

**Test Graph**

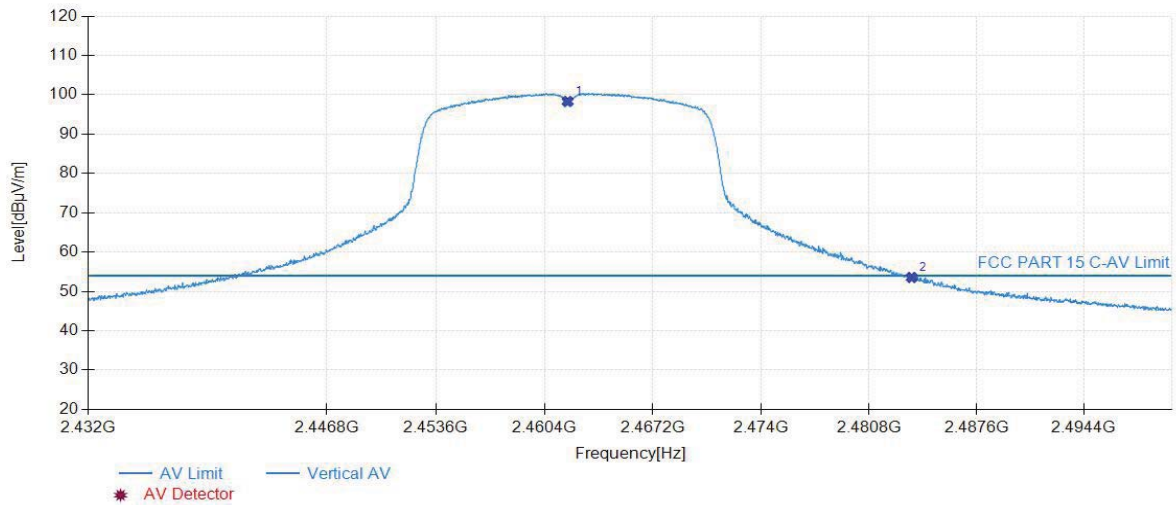

Suspected Data List								
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	2461.85	98.30	34.63	N/A	N/A	160	341	Vertical
2	2483.50	53.55	34.65	54.00	0.45	160	351	Vertical

## 7.8. AC Conducted Emissions Measurement


### 7.8.1. Test Limit

FCC Part 15 Subpart C Paragraph 15.207 Limits		
Frequency (MHz)	QP (dBuV)	AV (dBuV)
0.15 - 0.50	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30	60	50

Note 1: The lower limit shall apply at the transition frequencies.

Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.5MHz.


### 7.8.2. Test Setup

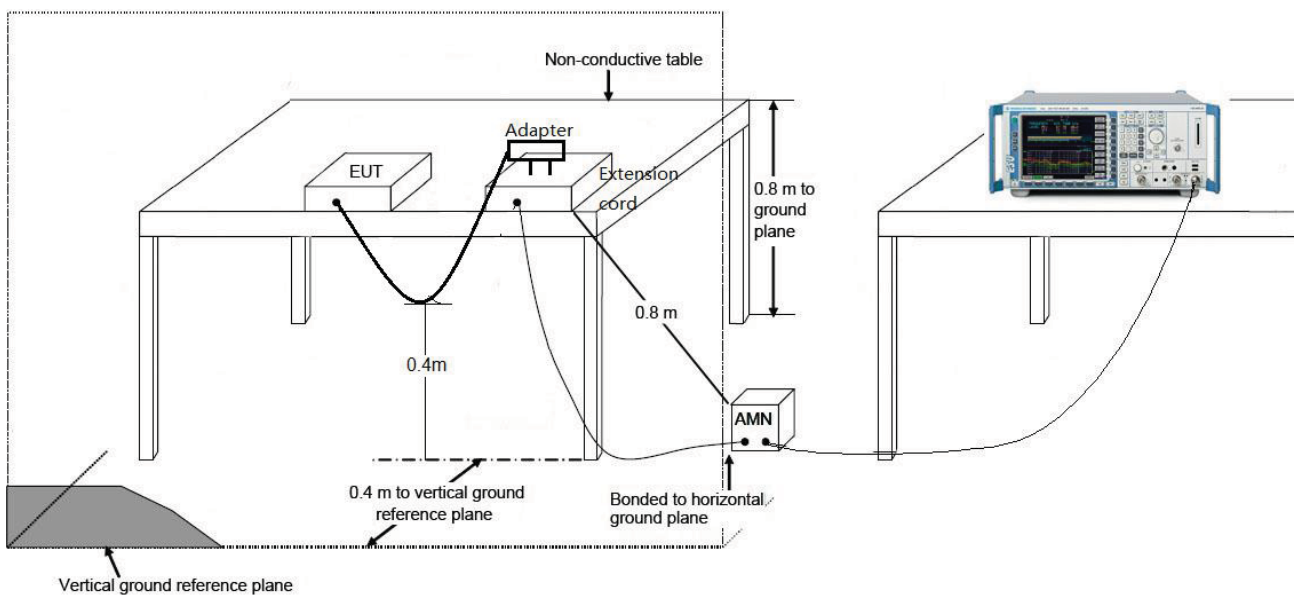




### 7.8.3. Test Result

EUT:	Taurus-MediaPlayer	Polarity:	LINE
Model:	TB60	Voltage:	120V/60Hz (Power Supply 1)
Environment:	Temp: 25°C; Humi:60%	Engineer:	Amos Xia
Remark:	Transmit by 802.11b at Channel 2412MHz		

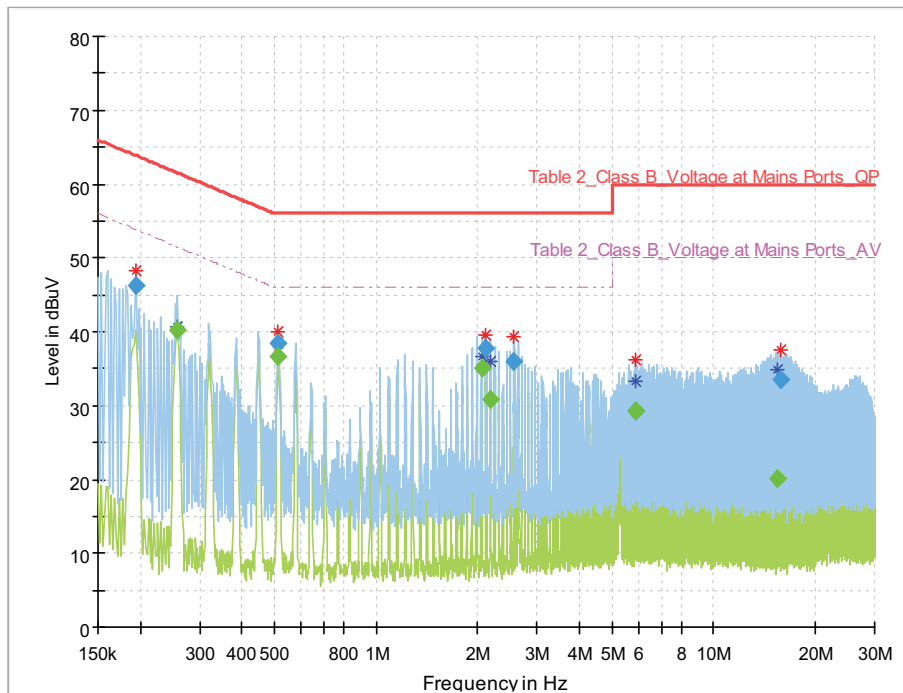


Frequency (MHz)	QuasiPeak (dBuV)	Average (dBuV)	Limit (dBuV)	Margin (dB)	Meas. Time	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.194000	46.33	---	63.86	17.54	1000.	9.000	L1	ON	9.5
0.258000	---	40.17	51.50	11.33	1000.	9.000	L1	ON	9.5
0.514000	---	36.66	46.00	9.34	1000.	9.000	L1	ON	9.5
0.514000	38.40	---	56.00	17.60	1000.	9.000	L1	ON	9.5
2.052000	---	35.17	46.00	10.83	1000.	9.000	L1	ON	9.6
2.118000	37.79	---	56.00	18.21	1000.	9.000	L1	ON	9.6
2.184000	---	30.90	46.00	15.10	1000.	9.000	L1	ON	9.6
2.568000	35.89	---	56.00	20.11	1000.	9.000	L1	ON	9.6
5.842000	29.25	---	60.00	30.75	1000.	9.000	L1	ON	9.7
5.904000	---	29.16	50.00	20.84	1000.	9.000	L1	ON	9.7
15.468000	---	20.21	50.00	29.79	1000.	9.000	L1	ON	9.8
15.848000	33.48	---	60.00	26.52	1000.	9.000	L1	ON	9.8

EUT:	Taurus-MediaPlayer	Polarity:	NEUTRAL
Model:	TB60	Voltage:	120V/60Hz (Power Supply 1)
Environment:	Temp: 25°C; Humi:60%	Engineer:	Amos Xia
Remark:	Transmit by 802.11b at Channel 2412MHz		

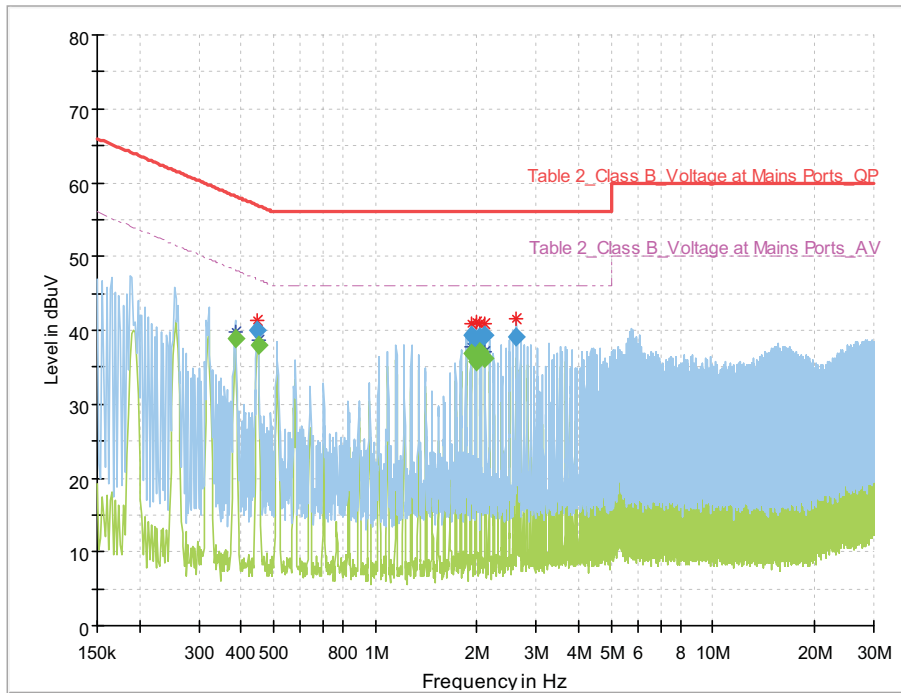


Frequency (MHz)	QuasiPeak (dBuV)	Average (dBuV)	Limit (dBuV)	Margin (dB)	Meas. Time	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.384000	---	38.95	48.19	9.24	1000.	9.000	N	ON	9.5
0.448000	39.95	---	56.91	16.96	1000.	9.000	N	ON	9.5
0.450000	---	37.91	46.88	8.96	1000.	9.000	N	ON	9.5
1.922000	39.24	---	56.00	16.76	1000.	9.000	N	ON	9.5
1.922000	---	36.94	46.00	9.06	1000.	9.000	N	ON	9.5
1.988000	38.13	---	56.00	17.87	1000.	9.000	N	ON	9.6
1.988000	---	35.78	46.00	10.22	1000.	9.000	N	ON	9.6
2.048000	39.15	---	56.00	16.85	1000.	9.000	N	ON	9.6
2.050000	---	37.13	46.00	8.87	1000.	9.000	N	ON	9.6
2.114000	39.44	---	56.00	16.56	1000.	9.000	N	ON	9.6
2.114000	---	36.14	46.00	9.86	1000.	9.000	N	ON	9.6
2.626000	39.06	---	56.00	16.94	1000.	9.000	N	ON	9.6

EUT:	Taurus-MediaPlayer	Polarity:	LINE
Model:	TB60	Voltage:	120V/60Hz (Power Supply 1)
Environment:	Temp: 25°C; Humi:60%	Engineer:	Amos Xia
Remark:	Transmit by 802.11b at Channel 2437MHz		

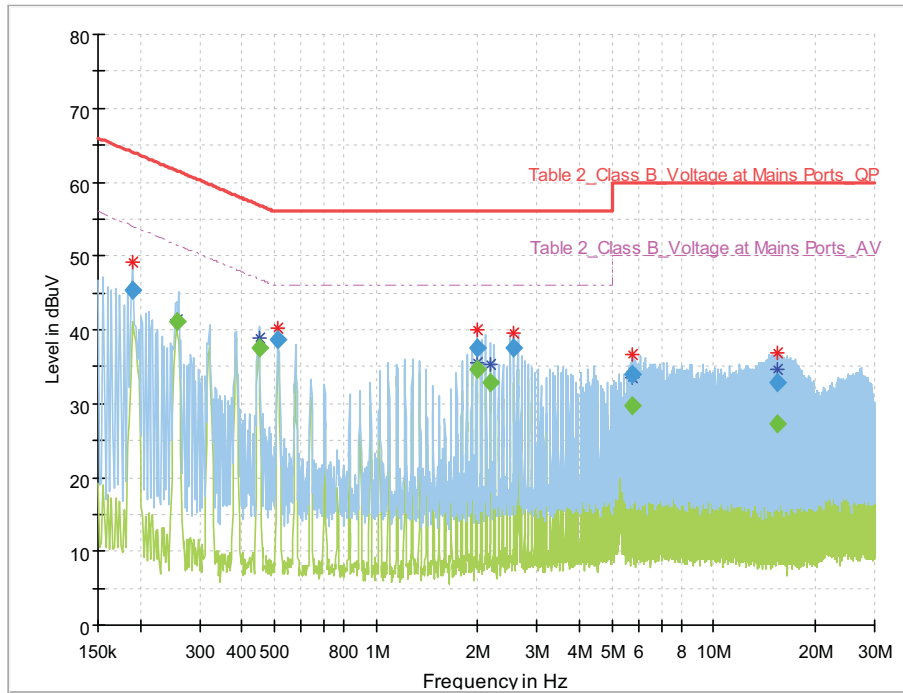


Frequency (MHz)	QuasiPeak (dBuV)	Average (dBuV)	Limit (dBuV)	Margin (dB)	Meas. Time	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.190000	45.37	---	64.04	18.67	1000.	9.000	L1	ON	9.5
0.256000	---	41.18	51.56	10.38	1000.	9.000	L1	ON	9.5
0.450000	---	37.64	46.88	9.24	1000.	9.000	L1	ON	9.5
0.512000	38.75	---	56.00	17.25	1000.	9.000	L1	ON	9.5
1.986000	37.64	---	56.00	18.36	1000.	9.000	L1	ON	9.6
1.988000	---	34.71	46.00	11.29	1000.	9.000	L1	ON	9.6
2.180000	---	32.75	46.00	13.25	1000.	9.000	L1	ON	9.6
2.564000	37.50	---	56.00	18.50	1000.	9.000	L1	ON	9.6
5.770000	33.91	---	60.00	26.09	1000.	9.000	L1	ON	9.7
5.770000	---	29.82	50.00	20.18	1000.	9.000	L1	ON	9.7
15.450000	---	27.33	50.00	22.67	1000.	9.000	L1	ON	9.8
15.514000	32.81	---	60.00	27.19	1000.	9.000	L1	ON	9.8

EUT:	Taurus-MediaPlayer	Polarity:	NEUTRAL
Model:	TB60	Voltage:	120V/60Hz (Power Supply 1)
Environment:	Temp: 25°C; Humi:60%	Engineer:	Amos Xia
Remark:	Transmit by 802.11b at Channel 2437MHz		

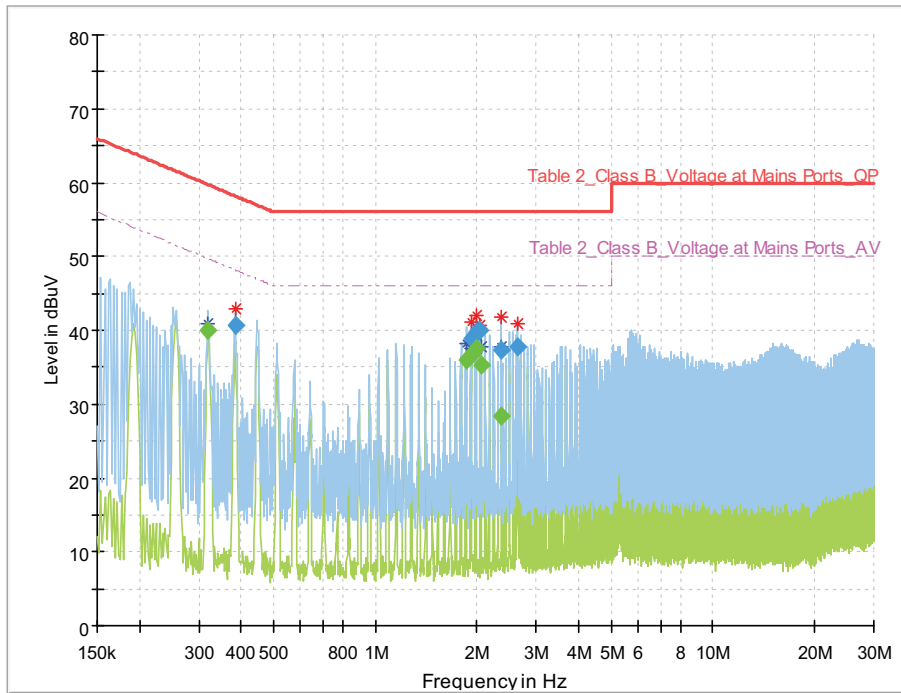


Frequency (MHz)	QuasiPeak (dBuV)	Average (dBuV)	Limit (dBuV)	Margin (dB)	Meas. Time	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.320000	---	39.98	49.71	9.73	1000.	9.000	N	ON	9.5
0.384000	40.63	---	58.19	17.56	1000.	9.000	N	ON	9.5
1.858000	---	35.88	46.00	10.12	1000.	9.000	N	ON	9.5
1.920000	38.85	---	56.00	17.15	1000.	9.000	N	ON	9.5
1.920000	---	36.60	46.00	9.40	1000.	9.000	N	ON	9.5
1.986000	39.88	---	56.00	16.12	1000.	9.000	N	ON	9.6
1.986000	---	37.48	46.00	8.52	1000.	9.000	N	ON	9.6
2.050000	40.03	---	56.00	15.97	1000.	9.000	N	ON	9.6
2.052000	---	35.26	46.00	10.74	1000.	9.000	N	ON	9.6
2.368000	37.24	---	56.00	18.76	1000.	9.000	N	ON	9.6
2.368000	---	28.36	46.00	17.64	1000.	9.000	N	ON	9.6
2.628000	37.84	---	56.00	18.16	1000.	9.000	N	ON	9.6

EUT:	Taurus-MediaPlayer	Polarity:	LINE
Model:	TB60	Voltage:	120V/60Hz (Power Supply 1)
Environment:	Temp: 25°C; Humi:60%	Engineer:	Amos Xia
Remark:	Transmit by 802.11b at Channel 2462MHz		

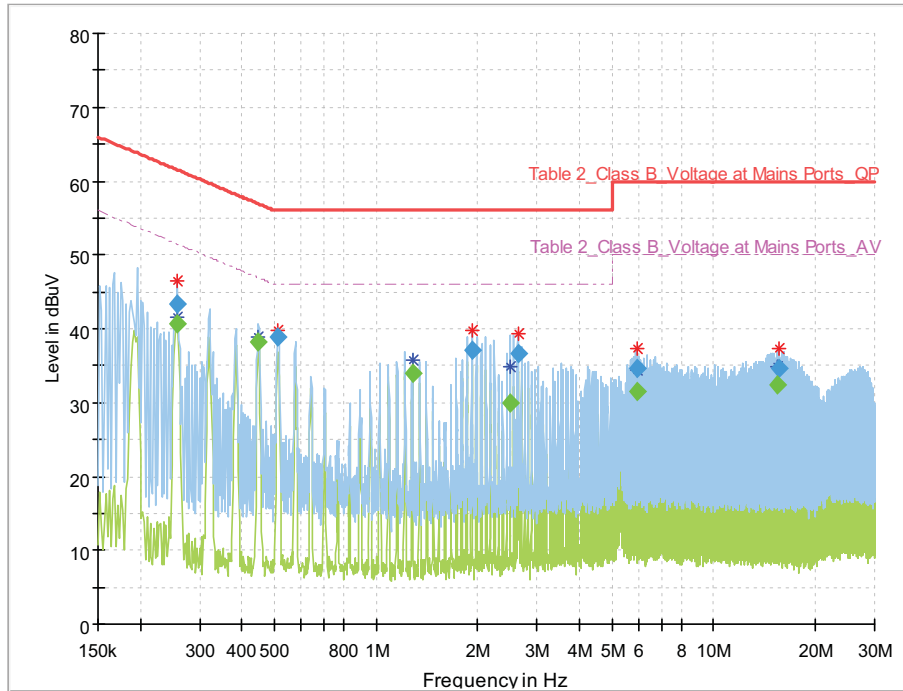


Frequency (MHz)	QuasiPeak (dBuV)	Average (dBuV)	Limit (dBuV)	Margin (dB)	Meas. Time	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.258000	---	40.56	51.50	10.94	1000.	9.000	L1	ON	9.5
0.258000	43.42	---	61.50	18.07	1000.	9.000	L1	ON	9.5
0.448000	---	38.12	46.91	8.79	1000.	9.000	L1	ON	9.5
0.514000	38.83	---	56.00	17.17	1000.	9.000	L1	ON	9.5
1.282000	---	34.00	46.00	12.00	1000.	9.000	L1	ON	9.5
1.922000	37.15	---	56.00	18.85	1000.	9.000	L1	ON	9.5
2.500000	---	29.91	46.00	16.09	1000.	9.000	L1	ON	9.6
2.628000	36.60	---	56.00	19.40	1000.	9.000	L1	ON	9.6
5.960000	34.65	---	60.00	25.35	1000.	9.000	L1	ON	9.7
5.960000	---	31.47	50.00	18.53	1000.	9.000	L1	ON	9.7
15.378000	---	32.46	50.00	17.54	1000.	9.000	L1	ON	9.8
15.698000	34.63	---	60.00	25.37	1000.	9.000	L1	ON	9.8

EUT:	Taurus-MediaPlayer	Polarity:	NEUTRAL
Model:	TB60	Voltage:	120V/60Hz (Power Supply 1)
Environment:	Temp: 25°C; Humi:60%	Engineer:	Amos Xia
Remark:	Transmit by 802.11b at Channel 2462MHz		

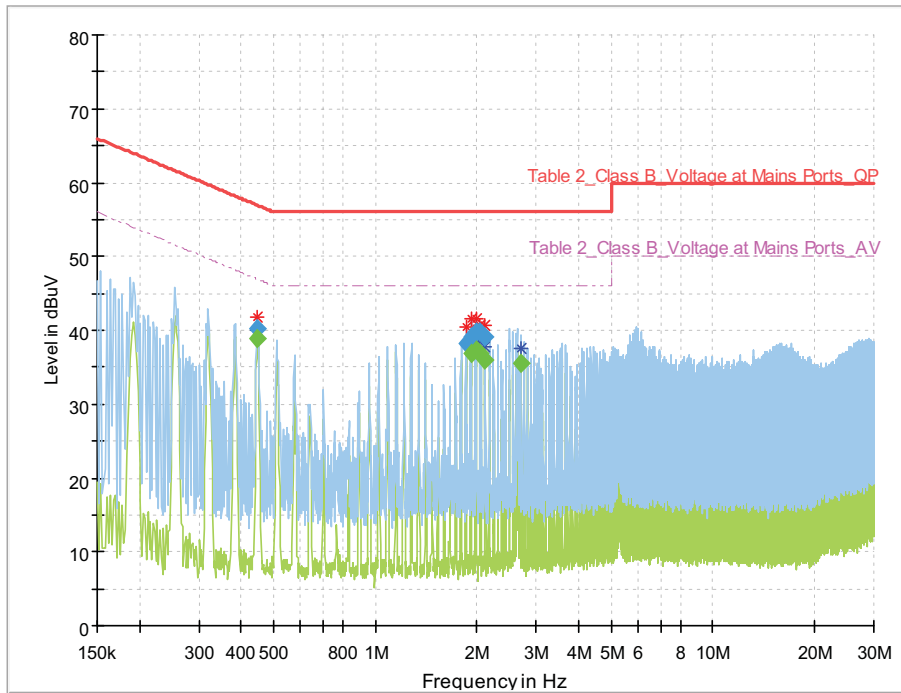


Frequency (MHz)	QuasiPeak (dBuV)	Average (dBuV)	Limit (dBuV)	Margin (dB)	Meas. Time	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.448000	---	38.94	46.91	7.97	1000.	9.000	N	ON	9.5
0.448000	40.25	---	56.91	16.66	1000.	9.000	N	ON	9.5
1.858000	38.18	---	56.00	17.82	1000.	9.000	N	ON	9.5
1.920000	---	36.90	46.00	9.10	1000.	9.000	N	ON	9.5
1.920000	39.16	---	56.00	16.84	1000.	9.000	N	ON	9.5
1.986000	---	37.24	46.00	8.76	1000.	9.000	N	ON	9.6
1.986000	39.69	---	56.00	16.31	1000.	9.000	N	ON	9.6
2.048000	---	36.93	46.00	9.07	1000.	9.000	N	ON	9.6
2.048000	39.84	---	56.00	16.16	1000.	9.000	N	ON	9.6
2.114000	---	35.96	46.00	10.04	1000.	9.000	N	ON	9.6
2.114000	39.13	---	56.00	16.87	1000.	9.000	N	ON	9.6
2.690000	---	35.62	46.00	10.38	1000.	9.000	N	ON	9.6

EUT:	Taurus-MediaPlayer	Polarity:	LINE
Model:	TB60	Voltage:	120V/60Hz (Power Supply 2)
Environment:	Temp: 22°C; Humi:55%	Engineer:	Amos Xia
Remark:	Transmit by 802.11b at Channel 2412MHz		

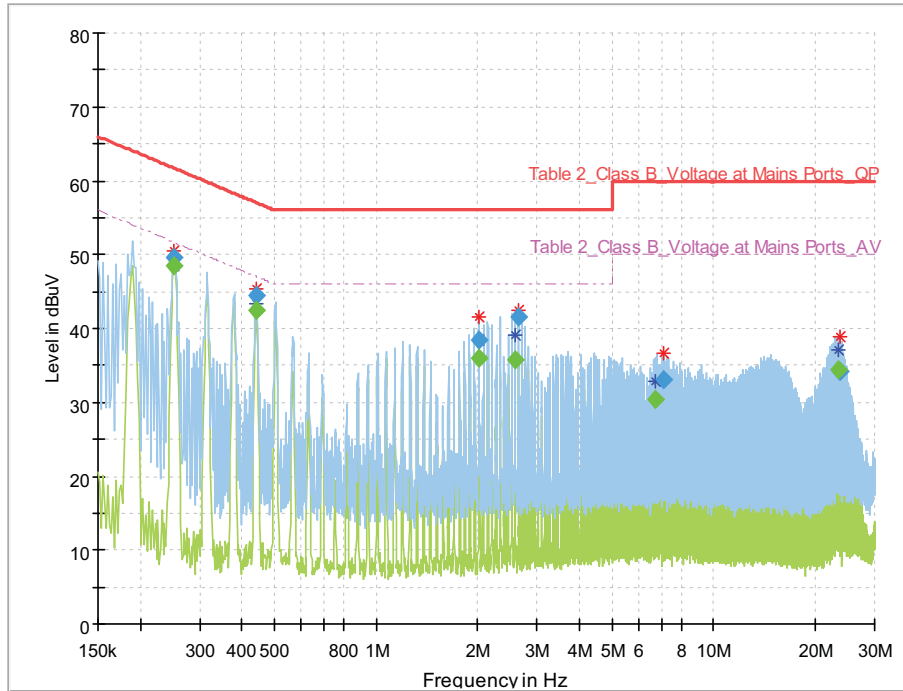

Frequency (MHz)	QuasiPeak (dBuV)	Average (dBuV)	Limit (dBuV)	Margin (dB)	Meas. Time	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.252000	---	48.45	51.69	3.24	1000.	9.000	L1	ON	9.5
0.252000	49.56	---	61.69	12.13	1000.	9.000	L1	ON	9.5
0.440000	---	42.37	47.06	4.69	1000.	9.000	L1	ON	9.5
0.442000	44.37	---	57.02	12.66	1000.	9.000	L1	ON	9.5
2.020000	38.47	---	56.00	17.53	1000.	9.000	L1	ON	9.6
2.020000	---	36.02	46.00	9.98	1000.	9.000	L1	ON	9.6
2.586000	---	35.76	46.00	10.24	1000.	9.000	L1	ON	9.6
2.648000	41.56	---	56.00	14.44	1000.	9.000	L1	ON	9.6
6.746000	---	30.45	50.00	19.55	1000.	9.000	L1	ON	9.7
7.126000	33.14	---	60.00	26.86	1000.	9.000	L1	ON	9.7
23.396000	---	34.48	50.00	15.52	1000.	9.000	L1	ON	9.8
23.582000	34.14	---	60.00	25.86	1000.	9.000	L1	ON	9.8


EUT:	Taurus-MediaPlayer	Polarity:	NEUTRAL
Model:	TB60	Voltage:	120V/60Hz (Power Supply 2)
Environment:	Temp: 22°C; Humi:55%	Engineer:	Amos Xia
Remark:	Transmit by 802.11b at Channel 2412MHz		

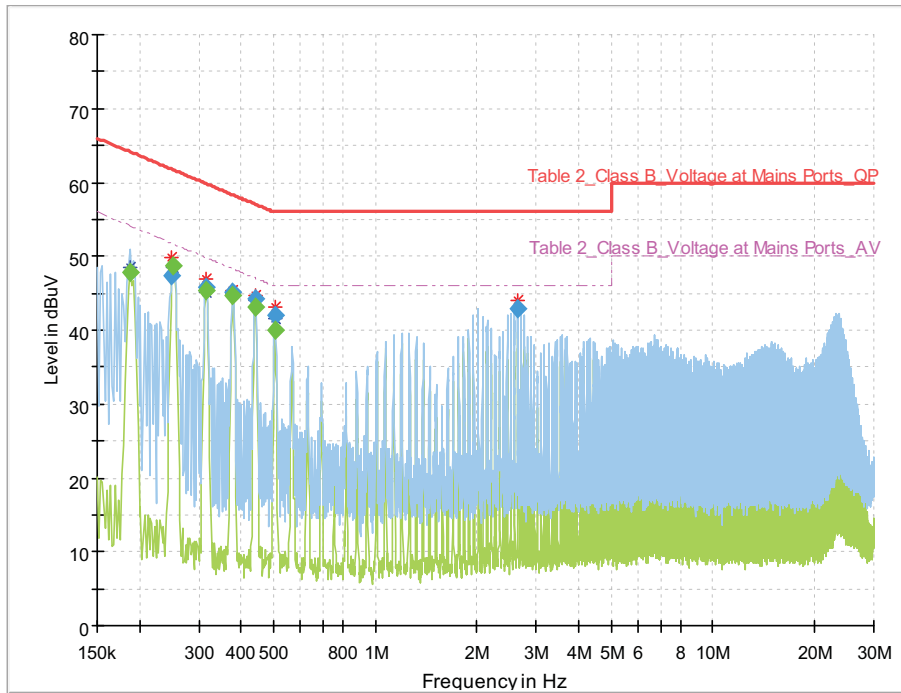

Frequency (MHz)	QuasiPeak (dBuV)	Average (dBuV)	Limit (dBuV)	Margin (dB)	Meas. Time	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.188000	---	47.75	54.12	6.38	1000.	9.000	N	ON	9.5
0.250000	47.46	---	61.76	14.30	1000.	9.000	N	ON	9.5
0.252000	---	48.79	51.69	2.90	1000.	9.000	N	ON	9.5
0.316000	---	45.44	49.81	4.37	1000.	9.000	N	ON	9.5
0.316000	45.88	---	59.81	13.93	1000.	9.000	N	ON	9.5
0.378000	---	44.61	48.32	3.71	1000.	9.000	N	ON	9.5
0.378000	45.14	---	58.32	13.19	1000.	9.000	N	ON	9.5
0.440000	44.23	---	57.06	12.83	1000.	9.000	N	ON	9.5
0.440000	---	43.20	47.06	3.86	1000.	9.000	N	ON	9.5
0.506000	42.10	---	56.00	13.90	1000.	9.000	N	ON	9.5
0.506000	---	40.11	46.00	5.89	1000.	9.000	N	ON	9.5
2.648000	42.94	---	56.00	13.06	1000.	9.000	N	ON	9.6




EUT:	Taurus-MediaPlayer	Polarity:	LINE
Model:	TB60	Voltage:	120V/60Hz (Power Supply 2)
Environment:	Temp: 22°C; Humi:55%	Engineer:	Amos Xia
Remark:	Transmit by 802.11b at Channel 2437MHz		

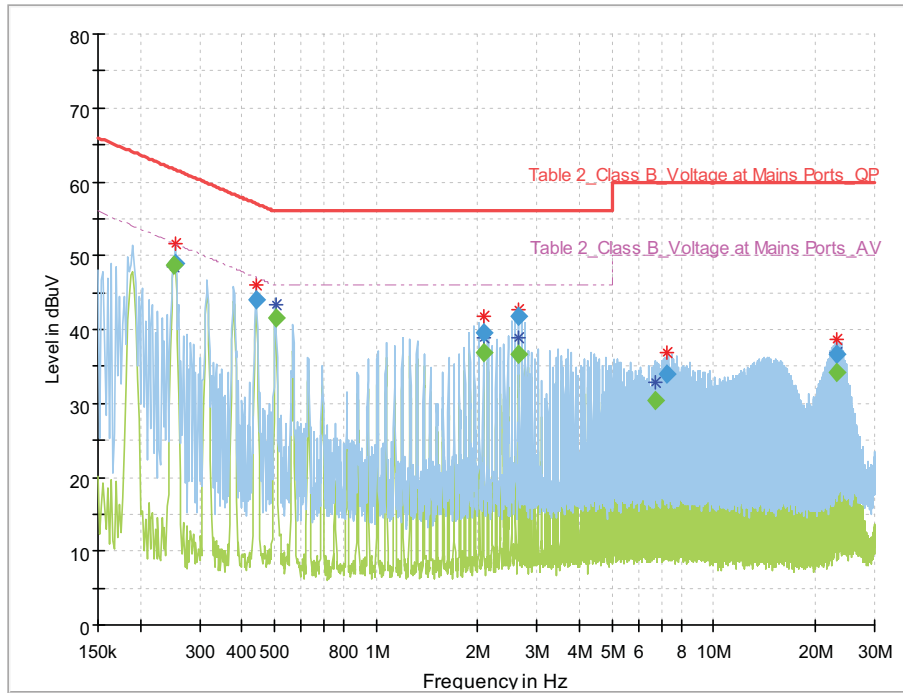


Frequency (MHz)	QuasiPeak (dBuV)	Average (dBuV)	Limit (dBuV)	Margin (dB)	Meas. Time	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.252000	---	48.76	51.69	2.93	1000.	9.000	L1	ON	9.5
0.254000	48.93	---	61.63	12.69	1000.	9.000	L1	ON	9.5
0.440000	43.99	---	57.06	13.07	1000.	9.000	L1	ON	9.5
0.506000	---	41.59	46.00	4.41	1000.	9.000	L1	ON	9.5
2.082000	39.60	---	56.00	16.40	1000.	9.000	L1	ON	9.6
2.082000	---	36.90	46.00	9.10	1000.	9.000	L1	ON	9.6
2.648000	41.71	---	56.00	14.29	1000.	9.000	L1	ON	9.6
2.648000	---	36.71	46.00	9.29	1000.	9.000	L1	ON	9.6
6.748000	---	30.47	50.00	19.53	1000.	9.000	L1	ON	9.7
7.254000	33.86	---	60.00	26.14	1000.	9.000	L1	ON	9.7
23.208000	---	34.29	50.00	15.71	1000.	9.000	L1	ON	9.8
23.208000	36.58	---	60.00	23.42	1000.	9.000	L1	ON	9.8

EUT:	Taurus-MediaPlayer	Polarity:	NEUTRAL
Model:	TB60	Voltage:	120V/60Hz (Power Supply 2)
Environment:	Temp: 22°C; Humi:55%	Engineer:	Amos Xia
Remark:	Transmit by 802.11b at Channel 2437MHz		

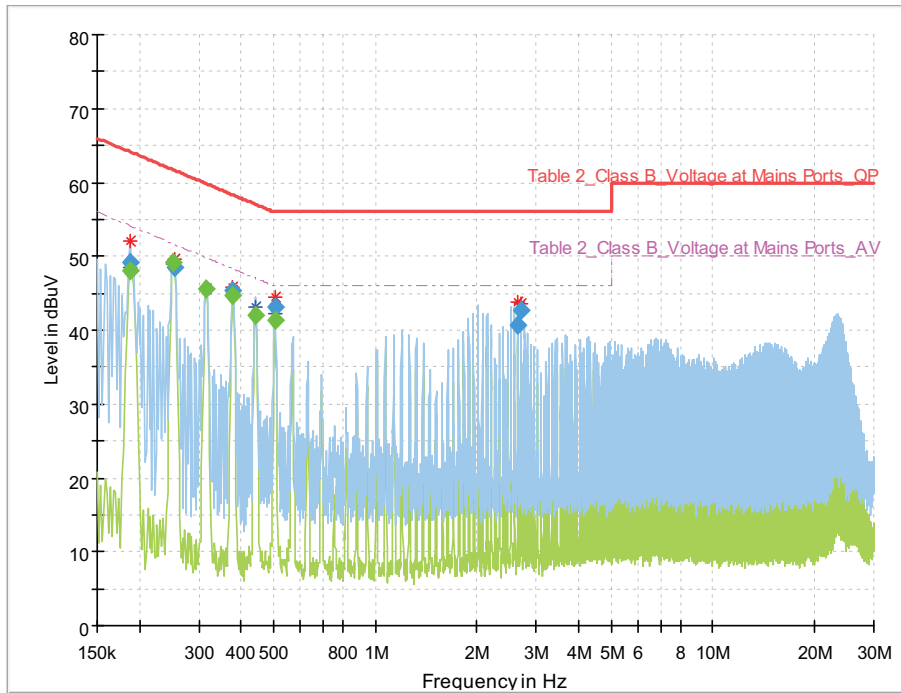


Frequency (MHz)	QuasiPeak (dBuV)	Average (dBuV)	Limit (dBuV)	Margin (dB)	Meas. Time	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.188000	---	48.05	54.12	6.08	1000.	9.000	N	ON	9.5
0.188000	49.06	---	64.12	15.06	1000.	9.000	N	ON	9.5
0.252000	---	49.08	51.69	2.61	1000.	9.000	N	ON	9.5
0.254000	48.43	---	61.63	13.20	1000.	9.000	N	ON	9.5
0.316000	---	45.70	49.81	4.11	1000.	9.000	N	ON	9.5
0.378000	45.44	---	58.32	12.89	1000.	9.000	N	ON	9.5
0.378000	---	44.68	48.32	3.64	1000.	9.000	N	ON	9.5
0.444000	---	42.04	46.99	4.95	1000.	9.000	N	ON	9.5
0.504000	43.23	---	56.00	12.77	1000.	9.000	N	ON	9.5
0.504000	---	41.24	46.00	4.76	1000.	9.000	N	ON	9.5
2.652000	40.69	---	56.00	15.31	1000.	9.000	N	ON	9.6
2.712000	42.62	---	56.00	13.38	1000.	9.000	N	ON	9.6

EUT:	Taurus-MediaPlayer	Polarity:	LINE
Model:	TB60	Voltage:	120V/60Hz (Power Supply 2)
Environment:	Temp: 22°C; Humi:55%	Engineer:	Amos Xia
Remark:	Transmit by 802.11b at Channel 2462MHz		

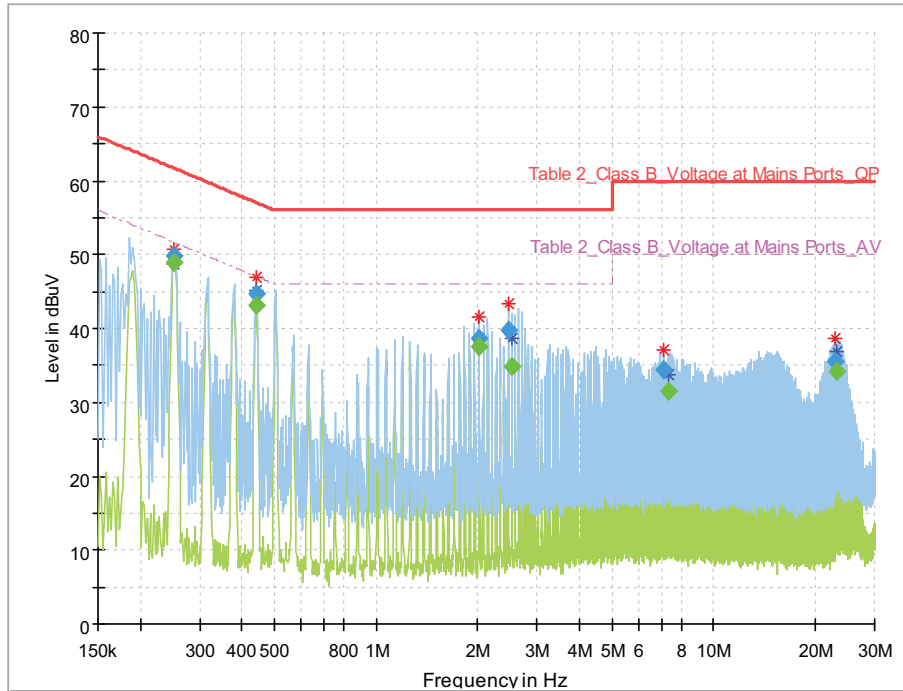

Frequency (MHz)	QuasiPeak (dBuV)	Average (dBuV)	Limit (dBuV)	Margin (dB)	Meas. Time	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.252000	---	49.00	51.69	2.69	1000.	9.000	L1	ON	9.5
0.252000	49.94	---	61.69	11.75	1000.	9.000	L1	ON	9.5
0.442000	---	43.04	47.02	3.98	1000.	9.000	L1	ON	9.5
0.442000	44.72	---	57.02	12.31	1000.	9.000	L1	ON	9.5
2.016000	38.63	---	56.00	17.37	1000.	9.000	L1	ON	9.6
2.018000	---	37.54	46.00	8.46	1000.	9.000	L1	ON	9.6
2.460000	39.71	---	56.00	16.29	1000.	9.000	L1	ON	9.6
2.522000	---	34.76	46.00	11.24	1000.	9.000	L1	ON	9.6
7.126000	34.34	---	60.00	25.66	1000.	9.000	L1	ON	9.7
7.316000	---	31.44	50.00	18.56	1000.	9.000	L1	ON	9.7
23.018000	35.44	---	60.00	24.56	1000.	9.000	L1	ON	9.8
23.210000	---	34.11	50.00	15.89	1000.	9.000	L1	ON	9.8

EUT:	Taurus-MediaPlayer	Polarity:	NEUTRAL
Model:	TB60	Voltage:	120V/60Hz (Power Supply 2)
Environment:	Temp: 22°C; Humi:55%	Engineer:	Amos Xia
Remark:	Transmit by 802.11b at Channel 2462MHz		

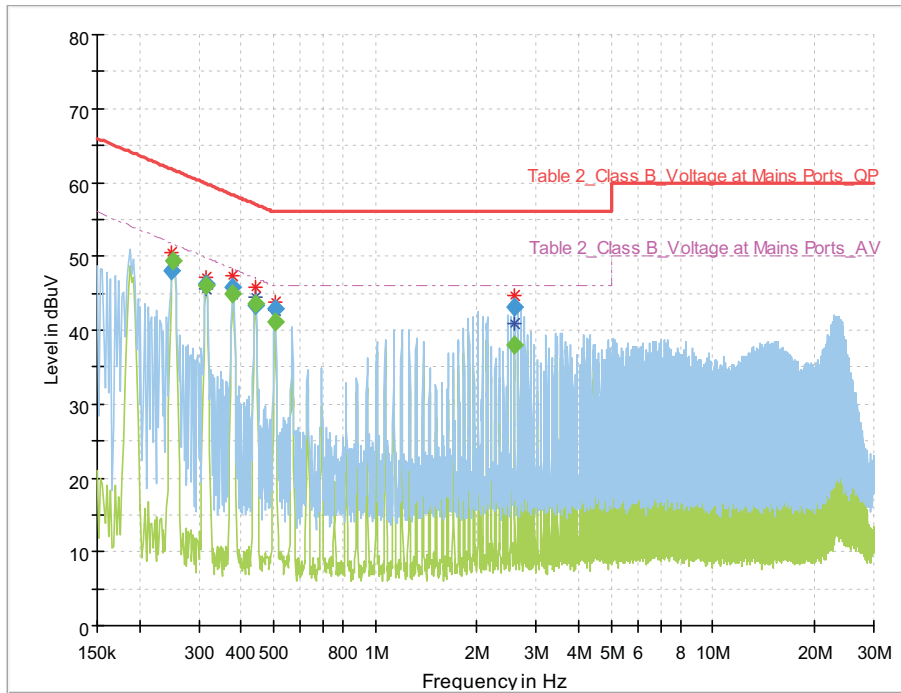

Frequency (MHz)	QuasiPeak (dBuV)	Average (dBuV)	Limit (dBuV)	Margin (dB)	Meas. Time	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.250000	47.96	---	61.76	13.80	1000.	9.000	N	ON	9.5
0.252000	---	49.47	51.69	2.23	1000.	9.000	N	ON	9.5
0.316000	---	45.93	49.81	3.89	1000.	9.000	N	ON	9.5
0.316000	46.26	---	59.81	13.55	1000.	9.000	N	ON	9.5
0.378000	---	44.94	48.32	3.39	1000.	9.000	N	ON	9.5
0.378000	45.74	---	58.32	12.58	1000.	9.000	N	ON	9.5
0.440000	---	43.49	47.06	3.57	1000.	9.000	N	ON	9.5
0.444000	43.38	---	56.99	13.61	1000.	9.000	N	ON	9.5
0.506000	42.80	---	56.00	13.20	1000.	9.000	N	ON	9.5
0.506000	---	41.04	46.00	4.96	1000.	9.000	N	ON	9.5
2.586000	---	38.05	46.00	7.95	1000.	9.000	N	ON	9.6
2.586000	43.10	---	56.00	12.90	1000.	9.000	N	ON	9.6

The End