


EUT:	LED Playback Control Processor	Polarity:	NEUTRAL
Model:	TU20 Pro	Power Supply:	ADS-36MG-12
Mode:	Mode 1	Voltage:	120V/60Hz
Environment:	Temp: 24°C; Humi:52%	Engineer:	Amos Xia
Remark:	Transmit at BLE_2M Channel 39		

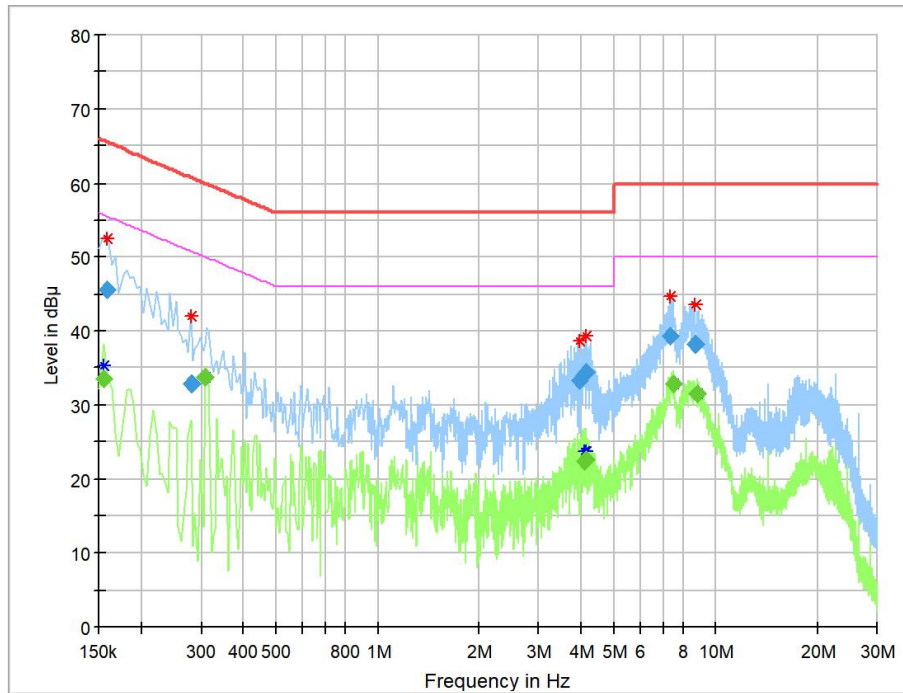

Frequency (MHz)	QuasiPeak (dBuV)	Average (dBuV)	Limit (dBuV)	Margin (dB)	Meas. Time	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.154500	---	33.45	55.75	22.31	100.0	9.000	N	ON	9.6
0.159000	45.52	---	65.52	19.99	100.0	9.000	N	ON	9.6
0.280500	32.75	---	60.80	28.05	100.0	9.000	N	ON	9.6
0.307500	---	33.63	50.04	16.40	100.0	9.000	N	ON	9.6
3.975000	33.36	---	56.00	22.64	100.0	9.000	N	ON	9.6
4.083000	---	22.39	46.00	23.61	100.0	9.000	N	ON	9.7
4.141500	34.35	---	56.00	21.65	100.0	9.000	N	ON	9.7
4.141500	---	22.49	46.00	23.51	100.0	9.000	N	ON	9.7
7.381500	39.42	---	60.00	20.58	100.0	9.000	N	ON	9.7
7.539000	---	32.90	50.00	17.10	100.0	9.000	N	ON	9.7
8.731500	38.14	---	60.00	21.86	100.0	9.000	N	ON	9.7
8.821500	---	31.47	50.00	18.53	100.0	9.000	N	ON	9.7

8. CONCLUSION

The data collected relate only the item(s) tested and show that the **LED Playback Control Processor** is in compliance with Part 15C of the FCC Rules.

_____ The End _____