

承认书

SPECIFICATION FOR APPROVAL

客户名称 (CUSTOMER):

秉鑫科技有限公司

客户料号 (CUSTOMER P: P300 Coil

品名 (DESCRIPTION):

无线充线圈

Wireless charging coil

DATE: 2024/07/04

规格 (SPECIFICATION): G43.5 notching+3.0mmEVA 60mm

REV.NO.: A0

深圳市鸿日昇威科技有限公司

HRSW ELECTRONICS CO.,LTD

ADD: 深圳市龙华新区观澜环观中路48号1栋2楼

2nd Floor, Building 1, No. 48 Huanguan Middle Road, Guanlan, Longhua New District, Shenzhen

TEL: +86-15112254520


FAX: +86-0755-28015170

page: 1/2




SPECIFICATION FOR APPROVAL

1.MECHANICAL DIMENSION (UNIT:mm)

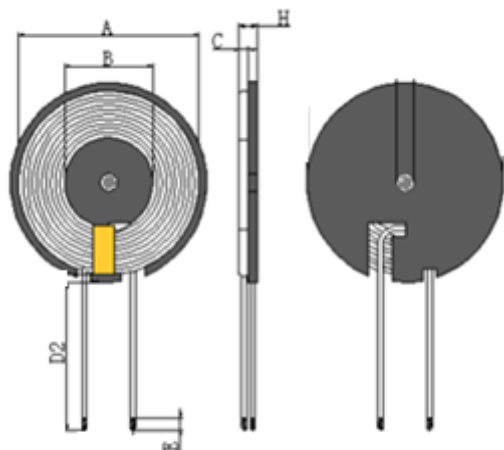

2. SCHEMATICS:



A	B	C	D2	E	H				I
43.5±0.5	20±1	0.8±0.5	60±3	3.5±2	5.0MAX				

3.WINDING:

ST EP	START-FINISH	WIRE TYPE	TURNS	TAPE	REMAR K
N1	S-F	Hot air wire Ø0.08*24mm 1UEW	10TS (Ref)		

4. ELECTRICAL SPECIFICATION:

ITEM	L	DCR	L	Q value	HI-POT
TES T CON	Coil and diskette	S-F	Individual coil		
	100KHz, 0.25V	AT 25°C	100KHz, 0.25V		
SPEC	6.4uH±10%	60mΩ Max	3.8uH±15%		

5.BILF OF MATERIAL:



NO.	ITEM	MATERIAL SPECIFICATION	MANUFACTURER	SGS NO.
1	0.08*24P	Hot wind 0.08*24*2P	NANJINGJINNINGCO,LTD	
2	Lead-free tin strip	Lead-free tin strip	QIAODO	
3	Magnetic sheet	Ø43.5*0.8Manganese zinc hard disk with L slot	TAIYI CO.,LTD	
4	glue	Yellow gum 9999	LIANCHENG CO.,LTD	
5	High-temperature adhesive paper	8mmWide high temperature adhesive paper	CUDAK CO.,LTD	
6	Rubber backing	ø41.8*3.0EVA	CUDAK CO.,LTD	

HRSW ELECTRONICS CO.,LTD		PART NO	
		TITLE	P300 coil
DRAWN BY	CHECKED BY		APPROVED BY
何伟华 Weihua He	韦立红 Lihong Wei		韦立红 Lihong Wei

SPECIFICATION FOR APPROVAL

1.MECHANICAL DIMENSION (UNIT:mm)

2. SCHEMATICS:

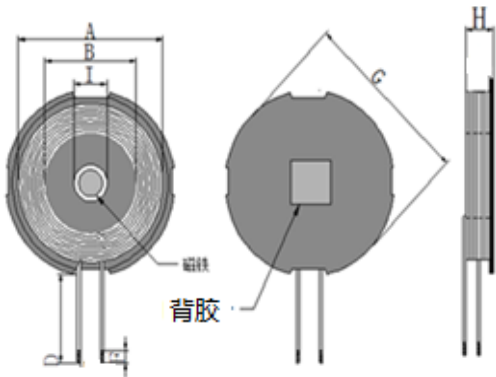

A	B	D	E	G	H		Remark
21±1.0	13.5±3	50±2	3±2	25MAX	2.6MAX		Line up casing, casing length45mm

3.WINDING:

1

STEP	START-FINISH	WIRE TYPE	TURNS	TAPE	REMARK
N1	S-F	Hot air wire $\varnothing 0.08 \times 24\text{mm}$ 2UEW	13TS (Ref)		

4. ELECTRICAL SPECIFICATION:

ITEM	L	DCR	L	Q value	HI-POT
TEST	Coil and diskette	S-F		S-F	
CON	100KHz, 0.25V	AT 25°C		100KHz, 0.25V	
SPEC	6.5uH±10%	40mΩ Max		44.5	

5.BILF OF MATERIAL:

NO.	ITEM	MATERIAL SPECIFICATION	MANUFACTURER	SGS NO.
1	Copper wire	0.08*24P	NANJINGJINNINGCO,LTD	
2	Lead-free tin strip	Lead-free tin strip	QIAODO	
3	Magnetic sheet	U52 magnetic	TAIYI CO.,LTD	
4	glue	Yellow gum 9999	LIANCHENG CO.,LTD	
5	magnet	No magnets, no glue	TAIYI CO.,LTD	
6	Rubber backing	$\varnothing 25 \times 0.1$ 3M	CUDAK CO.,LTD	

HRSW ELECTRONICS CO.,LTD		PART NO	
		TITLE	The watch coil is 50mm long
DRAWN BY		CHECKED BY	APPROVED BY
何伟华 Weihua He		韦立红 Lihong Wei	韦立红 Lihong Wei