

# TEST REPORT

Reference No..... : WTX21X05044996W-1  
FCC ID ..... : 2AGA6-FUGOOF6EL  
Applicant ..... : Shenzhen AngSi Technology Co., Ltd.  
Address ..... : 6/F, Block B, Ding Xin Science Park, Hong Lang North No.2 Road, Bao An District, ShenZhen PRC  
Product Name ..... : Fugoo Element  
Test Model. .... : F6ELKS01  
Standards ..... : FCC Part 15.247  
Date of Receipt sample .... : Jul.01, 2019  
Date of Test..... : Jul.01, 2019 to Jul.15, 2019  
Date of Issue ..... : May.18, 2021  
Test Result..... : **Pass**

Remarks:

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

**Prepared By:**

**Waltek Testing Group (Shenzhen) Co., Ltd.**

Address: 1/F., Room 101, Building 1, Hongwei Industrial Park, Liuxian 2nd Road,  
Block 70 Bao'an District, Shenzhen, Guangdong, China


Tel.: +86-755-33663308

Fax.: +86-755-33663309


Tested by:

Reviewed By:

Approved & Authorized By:

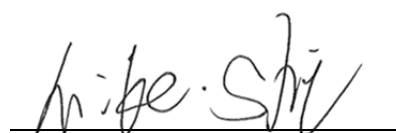

Mike Shi/ Project Engineer

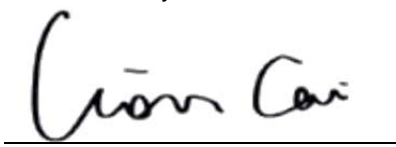

Lion Cai / RF Manager



Silin Chen / Manager

**TABLE OF CONTENTS**

<b>1. GENERAL INFORMATION .....</b>	<b>4</b>
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	4
1.2 TEST STANDARDS.....	5
1.3 TEST METHODOLOGY .....	5
1.4 TEST FACILITY .....	5
1.5 EUT SETUP AND TEST MODE .....	6
1.6 MEASUREMENT UNCERTAINTY .....	7
1.7 TEST EQUIPMENT LIST AND DETAILS .....	8
<b>2. SUMMARY OF TEST RESULTS .....</b>	<b>10</b>
<b>3. RF EXPOSURE .....</b>	<b>11</b>
3.1 STANDARD APPLICABLE.....	11
3.2 TEST RESULT.....	11
<b>4. ANTENNA REQUIREMENT .....</b>	<b>12</b>
4.1 STANDARD APPLICABLE.....	12
4.2 EVALUATION INFORMATION .....	12
<b>5. FREQUENCY HOPPING SYSTEM REQUIREMENTS .....</b>	<b>13</b>
5.1 STANDARD APPLICABLE.....	13
5.2 FREQUENCY HOPPING SYSTEM.....	13
5.3 EUT PSEUDORANDOM FREQUENCY HOPPING SEQUENCE .....	14
<b>6. QUANTITY OF HOPPING CHANNELS AND CHANNEL SEPARATION .....</b>	<b>15</b>
6.1 STANDARD APPLICABLE.....	15
6.2 TEST PROCEDURE.....	15
6.3 SUMMARY OF TEST RESULTS/PLOTS .....	15
<b>7. DWELL TIME OF HOPPING CHANNEL.....</b>	<b>19</b>
7.1 STANDARD APPLICABLE.....	19
7.2 TEST PROCEDURE.....	19
7.3 SUMMARY OF TEST RESULTS/PLOTS .....	20
<b>8. 20DB BANDWIDTH .....</b>	<b>27</b>
8.1 STANDARD APPLICABLE.....	27
8.2 TEST PROCEDURE.....	27
8.3 SUMMARY OF TEST RESULTS/PLOTS .....	28
<b>9. RF OUTPUT POWER .....</b>	<b>32</b>
9.1 STANDARD APPLICABLE.....	32
9.2 TEST PROCEDURE.....	32
9.3 SUMMARY OF TEST RESULTS/PLOTS .....	32
<b>10. FIELD STRENGTH OF SPURIOUS EMISSIONS .....</b>	<b>37</b>
10.1 STANDARD APPLICABLE.....	37
10.2 TEST PROCEDURE.....	37
10.3 CORRECTED AMPLITUDE & MARGIN CALCULATION.....	38
10.4 SUMMARY OF TEST RESULTS/PLOTS .....	38
<b>11. OUT OF BAND EMISSIONS.....</b>	<b>46</b>
11.1 STANDARD APPLICABLE.....	46
11.2 TEST PROCEDURE.....	46
11.3 SUMMARY OF TEST RESULTS/PLOTS .....	47
<b>12. CONDUCTED EMISSIONS .....</b>	<b>53</b>
12.1 TEST PROCEDURE.....	53
12.2 BASIC TEST SETUP BLOCK DIAGRAM.....	53
12.3 TEST RECEIVER SETUP .....	53
12.4 SUMMARY OF TEST RESULTS/PLOTS .....	53

**APPENDIX PHOTOGRAPHS.....56****Report version**

Version No.	Date of issue	Description
Rev.00	Jul.16, 2019	Original report WTX19X07043579W-1
Rev.1	May.18, 2021	Refer the old report WTX19X07043579W-1, updated the product photos, model name, product name, and brand name, change the name and address of the applicant &Manufacturer, but the circuit and the electronic construction do not change, declared by the manufacturer. So the test data from the original report.
/	/	/

## 1. GENERAL INFORMATION

---

### 1.1 Product Description for Equipment Under Test (EUT)

#### Client Information

Applicant: Shenzhen AngSi Technology Co., Ltd.  
 Address of applicant: 6/F, Block B, Ding Xin Science Park, Hong Lang North No.2 Road, Bao An District, ShenZhen PRC

Manufacturer: Blowfish Audio  
 Address of manufacturer: 7801 Hayvenhurst Ave Van Nuys, CA 91406 U.S.A.

General Description of EUT	
Product Name:	Fugoo Element
Brand Name:	FUGOO
Model No.:	F6ELKS01
Adding Model(s):	F6ELKS02, F6ELKS03, F6ELKS04
Rated Voltage:	Battery:DC3.7V
Battery Capacity:	4400mAh
Power Adapter:	/
<p><i>Note: The test data is gathered from a production sample, provided by the manufacturer. The appearance of others models listed in the report is different from main-test model F6ELKS01, but the circuit and the electronic construction do not change, declared by the manufacturer.</i></p>	

Technical Characteristics of EUT	
Bluetooth Version:	V4.2 (BDR/EDR mode)
Frequency Range:	2402-2480MHz
RF Output Power:	4.70dBm (Conducted)
Data Rate:	1Mbps, 2Mbps, 3Mbps
Modulation:	GFSK, Pi/4 QDPSK, 8DPSK
Quantity of Channels:	79
Channel Separation:	1MHz
Type of Antenna:	PCB Antenna
Antenna Gain:	-0.58dBi

## 1.2 Test Standards

The tests were performed according to following standards:

**FCC Rules Part 15.247:** Frequency Hopping, Direct Spread Spectrum and Hybrid Systems that are in operation within the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz.

**558074 D01 15.247 Meas Guidance v05r02:** Guidance For Compliance Measurements On Digital Transmission System, Frequency Hopping Spread Spectrum System, And Hybrid System Devices Operating Under Section 15.247 Of The Fcc Rules

**ANSI C63.10-2013:** American National Standard for Testing Unlicensed Wireless Devices.

**Maintenance of compliance** is the responsibility of the manufacturer. Any modification of the product, which result in lowering the emission, should be checked to ensure compliance has been maintained.

## 1.3 Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, The equipment under test (EUT) was configured to measure its highest possible emission level. The test modes were adapted accordingly in reference to the Operating Instructions.

## 1.4 Test Facility

### **FCC – Registration No.: 125990**

Waltek Testing Group (Shenzhen) Co., Ltd. Laboratory has been recognized to perform compliance testing on equipment subject to the Commissions Declaration Of Conformity (DOC). The Designation Number is CN5010, and Test Firm Registration Number is 125990.

### **Industry Canada (IC) Registration No.: 11464A**

The 3m Semi-anechoic chamber of Waltek Testing Group (Shenzhen) Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 11464A.

### 1.5 EUT Setup and Test Mode

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. All testing shall be performed under maximum output power condition, and to measure its highest possible emissions level, more detailed description as follows:

Test Mode List		
Test Mode	Description	Remark
TM1	Low Channel	2402MHz
TM2	Middle Channel	2441MHz
TM3	High Channel	2480MHz
TM4	Hopping	2402-2480MHz

Modulation Configure			
Modulation	Packet	Packet Type	Packet Size
GFSK	DH1	4	27
	DH3	11	183
	DH5	15	339
Pi/4 DQPSK	2DH1	20	54
	2DH3	26	367
	2DH5	30	679
8DPSK	3DH1	24	83
	3DH3	27	552
	3DH5	31	1021

Normal mode: the Bluetooth has been tested on the modulation of GFSK, (Pi/4)DQPSK and 8DPSK, compliance test and record the worst case.

Test Conditions	
Temperature:	22~25 °C
Relative Humidity:	50~55 %.
ATM Pressure:	1019 mbar

EUT Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
USB Cable	0.6	Unshielded	Without Ferrite
AUX Cable	1.0	Unshielded	Without Ferrite

Special Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
/	/	/	/

<b>Auxiliary Equipment List and Details</b>			
Description	Manufacturer	Model	Serial Number
Adapter	/	HJ-0501000	1408

### 1.6 Measurement Uncertainty

<b>Measurement uncertainty</b>		
Parameter	Conditions	Uncertainty
RF Output Power	Conducted	$\pm 0.42\text{dB}$
Occupied Bandwidth	Conducted	$\pm 1.5\%$
Conducted Spurious Emission	Conducted	$\pm 2.17\text{dB}$
Conducted Emissions	Conducted	9-150kHz $\pm 3.74\text{dB}$
		0.15-30MHz $\pm 3.34\text{dB}$
Transmitter Spurious Emissions	Radiated	30-200MHz $\pm 4.52\text{dB}$
		0.2-1GHz $\pm 5.56\text{dB}$
		1-6GHz $\pm 3.84\text{dB}$
		6-18GHz $\pm 3.92\text{dB}$

**1.7 Test Equipment List and Details**

No.	Description	Manufacturer	Model	Serial No.	Cal Date	Due Date
SEMT-1072	Spectrum Analyzer	Agilent	E4407B	MY41440400	2019-04-30	2020-04-29
SEMT-1031	Spectrum Analyzer	Rohde & Schwarz	FSP30	836079/035	2019-04-30	2020-04-29
SEMT-1007	EMI Test Receiver	Rohde & Schwarz	ESVB	825471/005	2019-04-30	2020-04-29
SEMT-1008	Amplifier	Agilent	8447F	3113A06717	2019-04-30	2020-04-29
SEMT-1043	Amplifier	C&D	PAP-1G18	2002	2019-04-30	2020-04-29
SEMT-1011	Broadband Antenna	Schwarz beck	VULB9163	9163-333	2019-05-05	2021-05-04
SEMT-1042	Horn Antenna	ETS	3117	00086197	2019-05-05	2021-05-04
SEMT-1121	Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170582	2019-05-05	2021-05-04
SEMT-1069	Loop Antenna	Schwarz beck	FMZB 1516	9773	2019-05-05	2021-05-04
SEMT-1001	EMI Test Receiver	Rohde & Schwarz	ESPI	101611	2019-04-30	2020-04-29
SEMT-1003	L.I.S.N	Schwarz beck	NSLK8126	8126-224	2019-04-30	2020-04-29
SEMT-1002	Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100911	2019-04-30	2020-04-29
SEMT-1168	Pre-amplifier	Direction Systems Inc.	PAP-0126	14141-12838	2019-04-30	2020-04-29
SEMT-1169	Pre-amplifier	Direction Systems Inc.	PAP-2640	14145-14153	2019-04-30	2020-04-29
SEMT-1163	Spectrum Analyzer	Rohde & Schwarz	FSP40	100612	2019-04-30	2020-04-29
SEMT-1170	DRG Horn Antenna	A.H. SYSTEMS	SAS-574	571	2019-05-05	2021-05-04
SEMT-1166	Power Limiter	Agilent	N9356B	MY45450376	2019-04-30	2020-04-29
SEMT-1048	RF Limiter	ATTEN	AT-BSF-2400~2500	/	2019-04-30	2020-04-29
SEMT-1076	RF Switcher	Top Precision	RCS03-A2	/	2019-04-30	2020-04-29
SEMT-C001	Cable	Zheng DI	LL142-07-07-10M(A)	/	2019-03-18	2020-03-17
SEMT-C002	Cable	Zheng DI	ZT40-2.92J-2.92J-6M	/	2019-03-18	2020-03-17
SEMT-C003	Cable	Zheng DI	ZT40-2.92J-2.92J-2.5M	/	2019-03-18	2020-03-17
SEMT-C004	Cable	Zheng DI	2M0RFC	/	2019-03-18	2020-03-17
SEMT-C005	Cable	Zheng DI	1M0RFC	/	2019-03-18	2020-03-17
SEMT-C006	Cable	Zheng DI	1M0RFC	/	2019-03-18	2020-03-17



<b>Software List</b>			
<b>Description</b>	<b>Manufacturer</b>	<b>Model</b>	<b>Version</b>
EMI Test Software (Radiated Emission)*	Farad	EZ-EMC	RA-03A1
EMI Test Software (Conducted Emission)*	Farad	EZ-EMC	RA-03A1

\*Remark: indicates software version used in the compliance certification testing

## 2. SUMMARY OF TEST RESULTS

FCC Rules	Description of Test Item	Result
§2.1093	RF Exposure	Compliant
§15.203; §15.247(b)(4)(i)	Antenna Requirement	Compliant
§15.205	Restricted Band of Operation	Compliant
§15.207(a)	Conducted Emission	Compliant
§15.209(a)	Radiated Spurious Emissions	Compliant
§15.247(a)(1)(iii)	Quantity of Hopping Channel	Compliant
§15.247(a)(1)	Channel Separation	Compliant
§15.247(a)(1)(iii)	Time of Occupancy (Dwell time)	Compliant
§15.247(a)	20dB Bandwidth	Compliant
§15.247(b)(1)	RF Power Output	Compliant
§15.247(d)	Band Edge (Out of Band Emissions)	Compliant
§15.247(a)(1)	Frequency Hopping Sequence	Compliant
§15.247(g), (h)	Frequency Hopping System	Compliant

N/A: not applicable

### **3. RF Exposure**

---

#### **3.1 Standard Applicable**

According to §1.1307 and §2.1093, the portable transmitter must comply the RF exposure requirements.

#### **3.2 Test Result**

This product complied with the requirement of the RF exposure, please see the RF Exposure Report.

## **4. Antenna Requirement**

---

### **4.1 Standard Applicable**

According to FCC Part 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

### **4.2 Evaluation Information**

This product has a PCB antenna, fulfill the requirement of this section.

## 5. Frequency Hopping System Requirements

---

### 5.1 Standard Applicable

According to FCC Part 15.247(a)(1), the system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

(g) Frequency hopping spread spectrum systems are not required to employ all available hopping channels during each transmission. However, the system, consisting of both the transmitter and the receiver, must be designed to comply with all of the regulations in this section should the transmitter be presented with a continuous data (or information) stream. In addition, a system employing short transmission bursts must comply with the definition of a frequency hopping system and must distribute its transmissions over the minimum number of hopping channels specified in this section.

(h) The incorporation of intelligence within a frequency hopping spread spectrum system that permits the system to recognize other users within the spectrum band so that it individually and independently chooses and adapts its hopsets to avoid hopping on occupied channels is permitted. The coordination of frequency hopping systems in any other manner for the express purpose of avoiding the simultaneous occupancy of individual hopping frequencies by multiple transmitters is not permitted.

### 5.2 Frequency Hopping System

This transmitter device is frequency hopping device, and complies with FCC part 15.247 rule.

This device uses Bluetooth radio which operates in 2400-2483.5 MHz band. Bluetooth uses a radio technology called frequency-hopping spread spectrum, which chops up the data being sent and transmits chunks of it on up to 79 bands (1 MHz each; centred from 2402 to 2480 MHz) in the range 2,400-2,483.5 MHz. The transmitter switches hop frequencies 1,600 times per second to assure a high degree of data security. All Bluetooth devices participating in a given piconet are synchronized to the frequency-hopping channel for the piconet. The frequency hopping sequence is determined by the master's device address and the phase of the hopping sequence (the frequency to hop at a specific time) is determined by the master's internal clock. Therefore, all slaves in a piconet must know the master's device address and must synchronize their clocks with the master's clock.

Adaptive Frequency Hopping (AFH) was introduced in the Bluetooth specification to provide an effective way for a Bluetooth radio to counteract normal interference. AFH identifies "bad" channels, where either other wireless devices are interfering with the Bluetooth signal or the Bluetooth signal is interfering with another device. The AFH-enabled Bluetooth device will then communicate with other devices within its piconet to share details of any identified bad channels. The devices will then switch to alternative available "good" channels, away from the areas of interference, thus having no impact on the bandwidth used.

This device was tested with a Bluetooth system receiver to check that the device maintained hopping synchronization, and the device complied with these requirements for 558074 D01 15.247 Meas Guidance v05r02 and FCC Part 15.247 rule.

### **5.3 EUT Pseudorandom Frequency Hopping Sequence**

Pseudorandom Frequency Hopping Sequence Table as below:

Channel: 08, 24, 40, 56, 40, 56, 72, 09, 01, 09, 33, 41, 33, 41, 65, 73, 53, 69, 06, 22, 04, 20, 36, 52, 38, 46, 70, 78, 68, 76, 21, 29, 10, 26, 42, 58, 44, 60, 76, 13, 03, 11, 35, 43, 37, 45, 69, 77, 55, 71, 08, 24, 08, 24, 40, 56, 40, 48, 72, 01, 72, 01, 25, 33, 12, 28, 44, 60, 42, 58, 74, 11, 05, 13, 37, 45 etc.

The system receiver have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shift frequencies in synchronization with the transmitted signals.

## 6. Quantity of Hopping Channels and Channel Separation

---

### 6.1 Standard Applicable

According to FCC 15.247(a)(1), frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, and frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.

### 6.2 Test Procedure

According to KDB 558074 D01 v05r02 Subclause 9 and ANSI C63.10-2013 section 7.8.3, the number of hopping frequencies test method as follows.


- a) Span: The frequency band of operation. Depending on the number of channels the device supports, it may be necessary to divide the frequency range of operation across multiple spans, to allow the individual channels to be clearly seen.
- b) RBW: To identify clearly the individual channels, set the RBW to less than 30% of the channel spacing or the 20 dB bandwidth, whichever is smaller.
- c) VBW  $\geq$  RBW.
- d) Sweep: Auto.
- e) Detector function: Peak.
- f) Trace: Max hold.
- g) Allow the trace to stabilize.

According to KDB 558074 D01 v05r02 Subclause 9 and ANSI C63.10-2013 section 7.8.2, the EUT shall have its hopping function enabled, the Carrier frequency separation test method as follows:

- a) Span: Wide enough to capture the peaks of two adjacent channels.
- b) RBW: Start with the RBW set to approximately 30% of the channel spacing; adjust as necessary to best identify the center of each individual channel.
- c) Video (or average) bandwidth (VBW)  $\geq$  RBW.
- d) Sweep: Auto.
- e) Detector function: Peak.
- f) Trace: Max hold.
- g) Allow the trace to stabilize.

Use the marker-delta function to determine the separation between the peaks of the adjacent channels.


### 6.3 Summary of Test Results/Plots

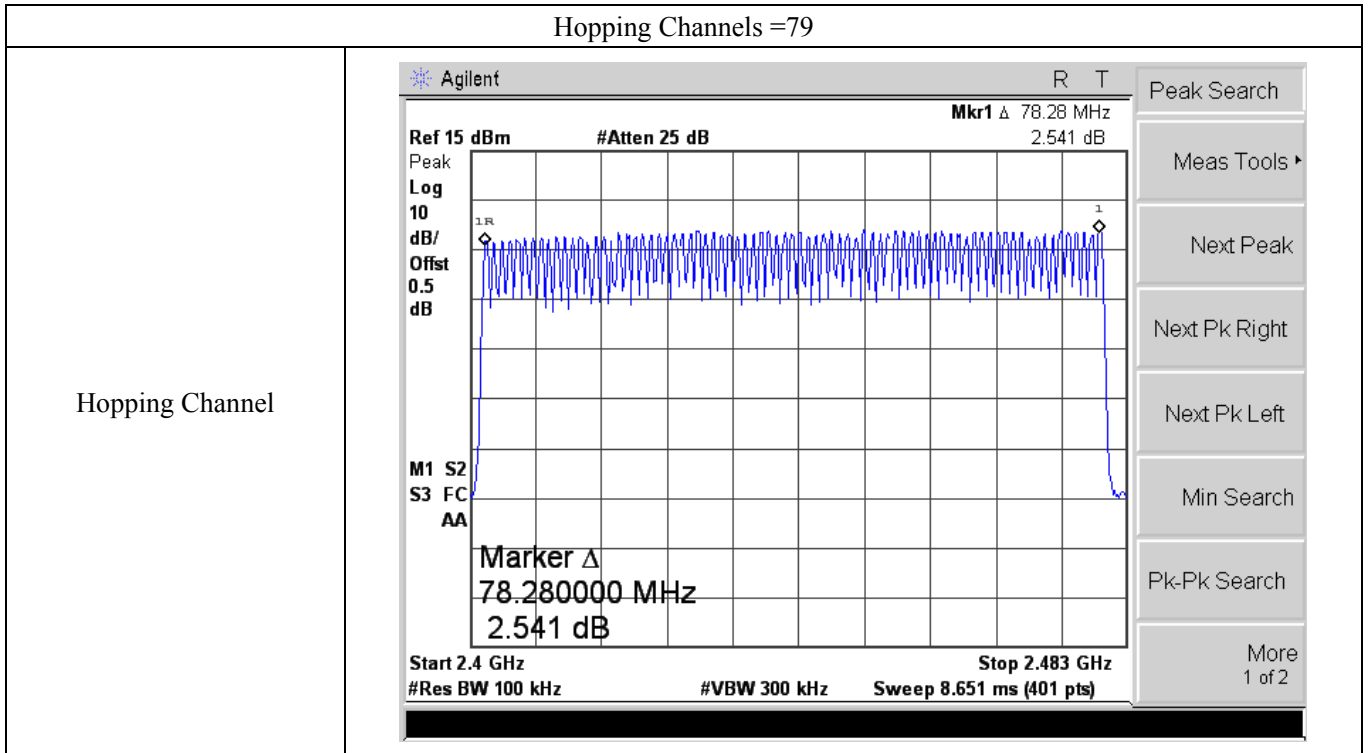

Mode	Channel	Carrier Frequencies Separation (kHz)	Result
GFSK	Low	1005.0	Pass
	Middle	1005.0	Pass
	High	1005.0	Pass
8DPSK	Low	1005.0	Pass
	Middle	997.5	Pass
	High	1005.0	Pass



Channel Separation-GFSK	
Low Channel	<p>Agilent R T          Ref 15 dBm #Atten 25 dB Mkr1 Δ 1.0050 MHz 0.122 dB          Peak Log 10 dB/ Offst 0.5 dB          M1 S2 S3 FC AA          Marker Δ 1.005000 MHz 0.122 dB          Center 2.402 GHz Span 3 MHz          #Res BW 30 kHz #VBW 100 kHz Sweep 5 ms (401 pts)</p>
Middle Channel	<p>Agilent R T          Ref 15 dBm #Atten 25 dB Mkr1 Δ 1.0050 MHz 0.017 dB          Peak Log 10 dB/ Offst 0.5 dB          M1 S2 S3 FC AA          Marker Δ 1.005000 MHz 0.017 dB          Center 2.442 GHz Span 3 MHz          #Res BW 30 kHz #VBW 100 kHz Sweep 5 ms (401 pts)</p>
High Channel	<p>Agilent R T          Ref 15 dBm #Atten 25 dB Mkr1 Δ 1.0050 MHz 0.008 dB          Peak Log 10 dB/ Offst 0.5 dB          M1 S2 S3 FC AA          Marker Δ 1.005000 MHz 0.008 dB          Center 2.479 GHz Span 3 MHz          #Res BW 30 kHz #VBW 100 kHz Sweep 5 ms (401 pts)</p>

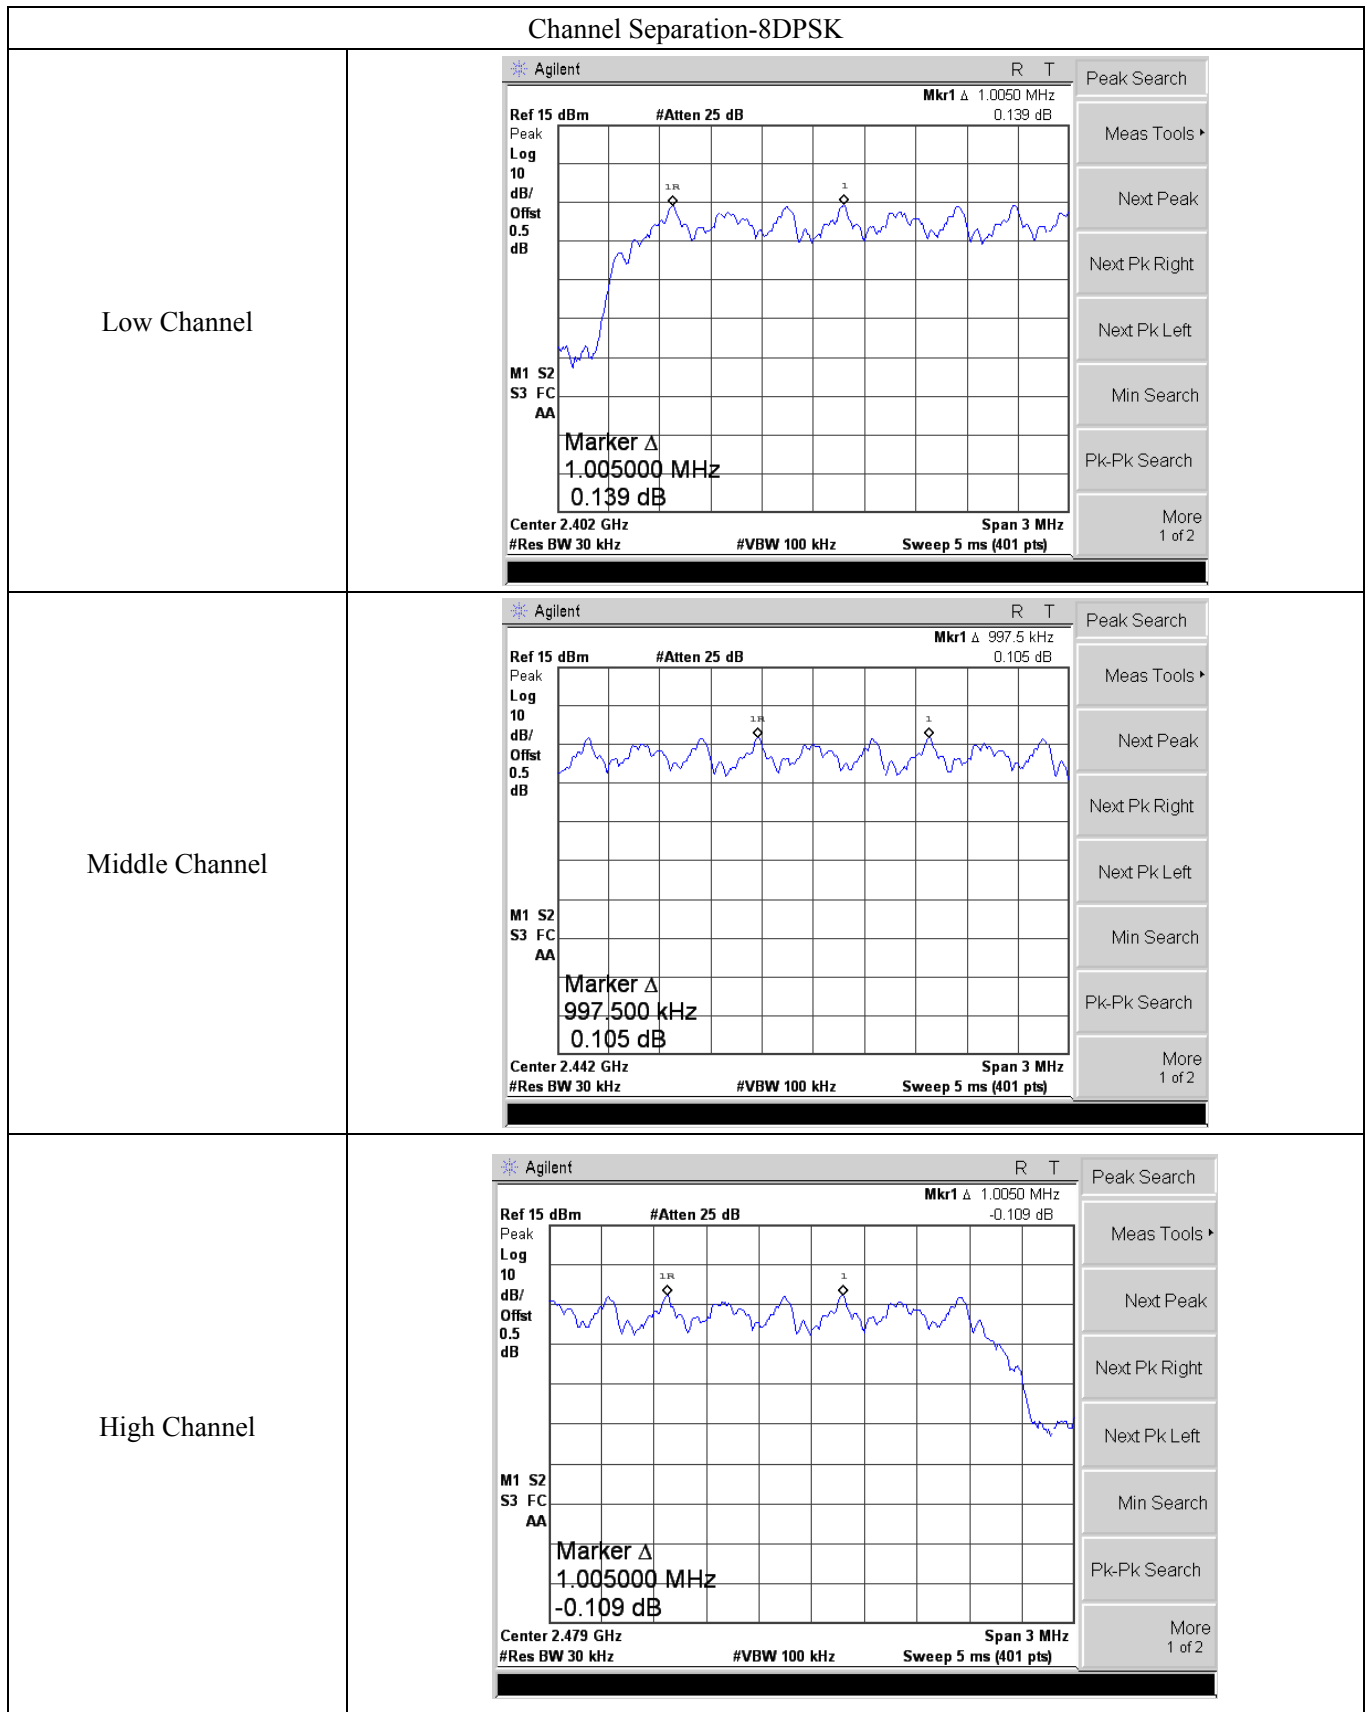

## 7. Dwell Time of Hopping Channel

---

### 7.1 Standard Applicable

According to 15.247(a)(1)(iii), frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

### 7.2 Test Procedure

According to KDB 558074 D01 v05r02 Subclause 9 and ANSI C63.10-2013 section 7.8.4, the dwell time of a hopping channel test method as follows.

- a) Span: Zero span, centered on a hopping channel.
- b) RBW shall be  $\leq$  channel spacing and where possible RBW should be set  $\gg 1 / T$ , where T is the expected dwell time per channel.
- c) Sweep: As necessary to capture the entire dwell time per hopping channel; where possible use a video trigger and trigger delay so that the transmitted signal starts a little to the right of the start of the plot. The trigger level might need slight adjustment to prevent triggering when the system hops on an adjacent channel; a second plot might be needed with a longer sweep time to show two successive hops on a channel.
- d) Detector function: Peak.
- e) Trace: Max hold.

Use the marker-delta function to determine the transmit time per hop. If this value varies with different modes of operation (data rate, modulation format, number of hopping channels, etc.), then repeat this test for each variation in transmit time.

Repeat the measurement using a longer sweep time to determine the number of hops over the period specified in the requirements. The sweep time shall be equal to, or less than, the period specified in the requirements. Determine the number of hops over the sweep time and calculate the total number of hops in the period specified in the requirements, using the following equation:

$$\begin{aligned} & \text{(Number of hops in the period specified in the requirements)} = \\ & \text{(number of hops on spectrum analyzer)} \times \text{(period specified in the requirements / analyzer sweep time)} \end{aligned}$$

The average time of occupancy is calculated from the transmit time per hop multiplied by the number of hops in the period specified in the requirements. If the number of hops in a specific time varies with different modes of operation (data rate, modulation format, number of hopping channels, etc.), then repeat this test for each variation. The measured transmit time and time between hops shall be consistent with the values described in the operational description for the EUT.

### 7.3 Summary of Test Results/Plots

The dwell time within a period in data mode is independent from the packet type (packet length).

Test data is corrected with the worse case, which the packet length is DH1, DH3, and DH5.

The test period:  $T = 0.4 \text{ Second} * 79 \text{ Channel} = 31.6 \text{ s}$

Dwell time = time slot length \* (Hopping rate / Number of hopping channels) \* Period


Modulation	Test Channel	Packet	Time Slot Length	Dwell Time	Limit
			ms	ms	ms
GFSK	Low	DH1	0.41	131.20	400
		DH3	1.67	267.20	400
		DH5	2.93	312.53	400
	Middle	DH1	0.43	137.60	400
		DH3	1.70	272.00	400
		DH5	2.93	312.53	400
	High	DH1	0.43	137.60	400
		DH3	1.68	268.80	400
		DH5	2.93	312.53	400
8DPSK	Low	3DH1	0.43	137.60	400
		3DH3	1.68	268.80	400
		3DH5	2.93	312.53	400
	Middle	3DH1	0.43	137.60	400
		3DH3	1.68	268.80	400
		3DH5	2.94	313.60	400
	High	3DH1	0.43	137.60	400
		3DH3	1.68	268.80	400
		3DH5	2.93	312.53	400

*Please refer to the test plots as below:*


DH1	
Low Channel	
Middle Channel	
High Channel	

DH3


Low Channel

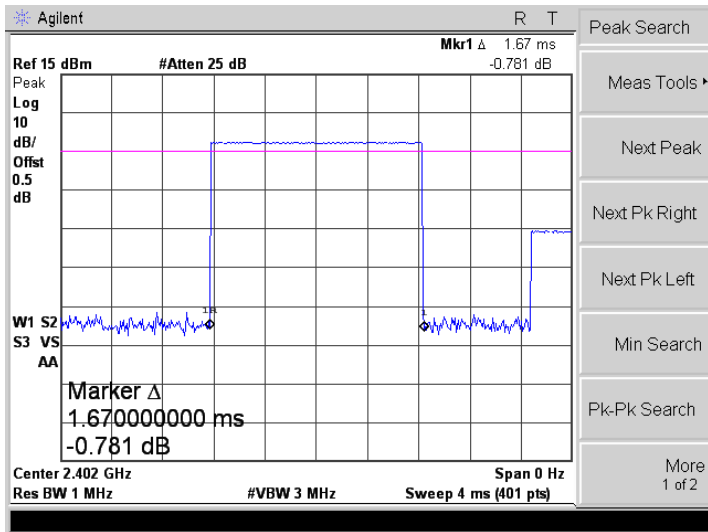


Middle Channel

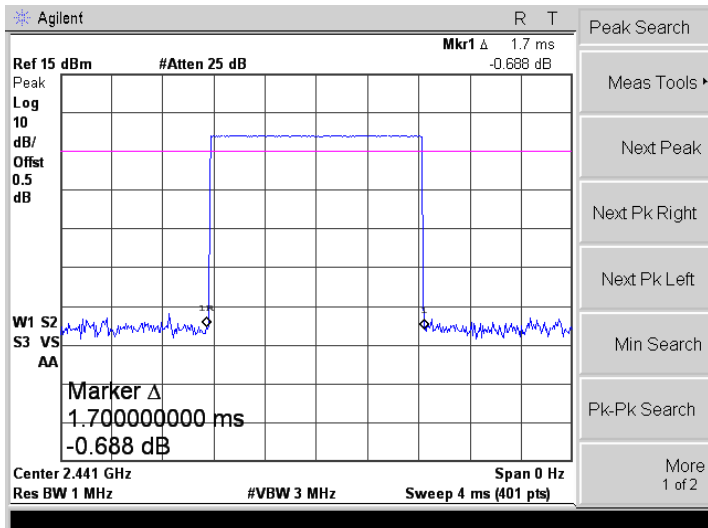


High Channel

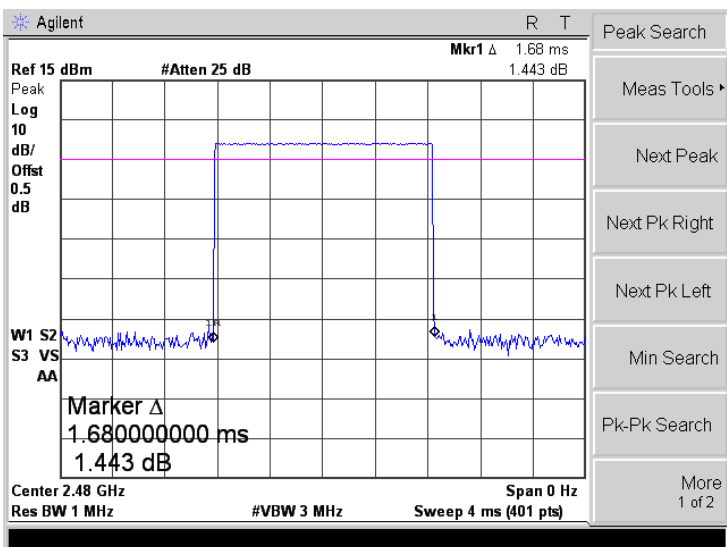


DH5	
Low Channel	
Middle Channel	
High Channel	

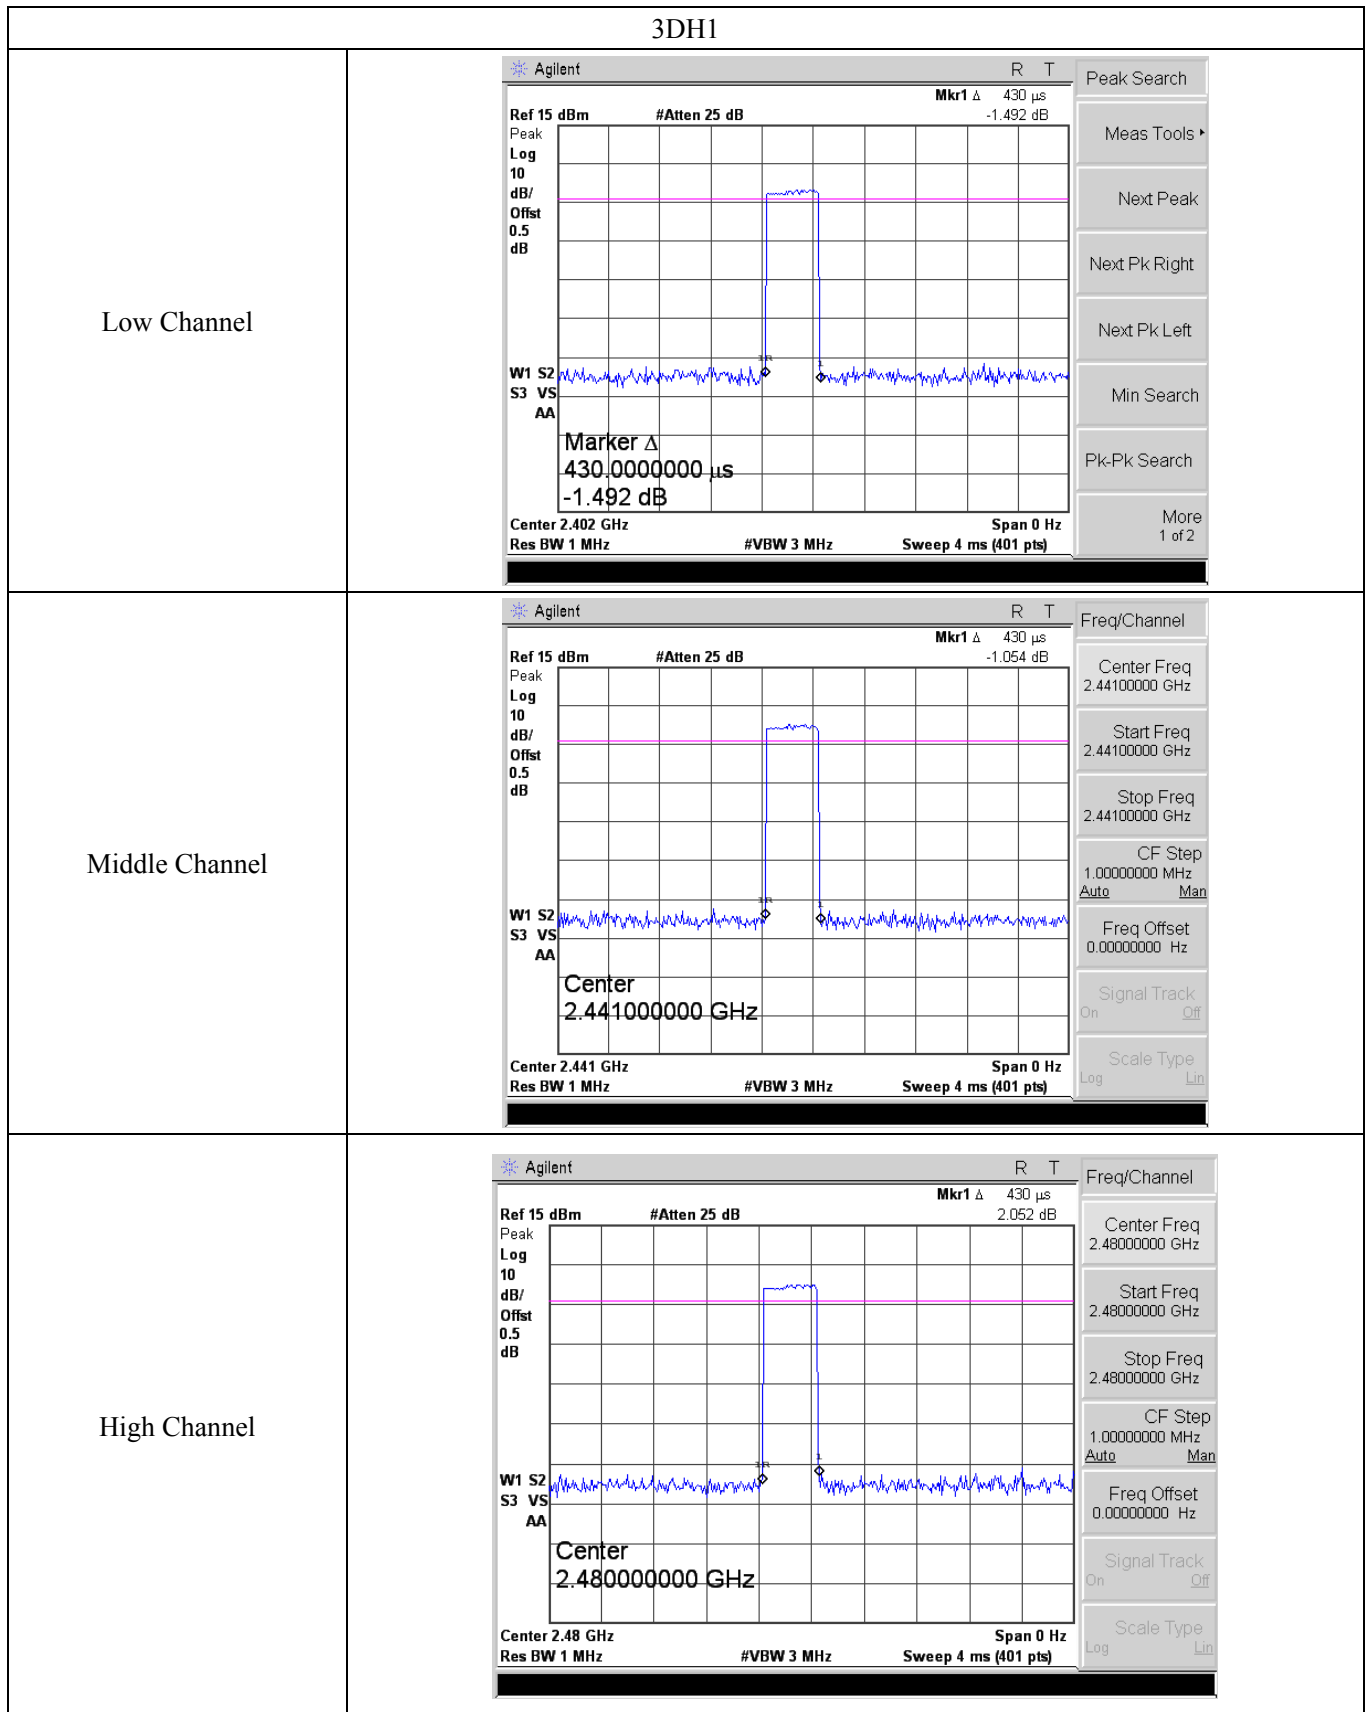



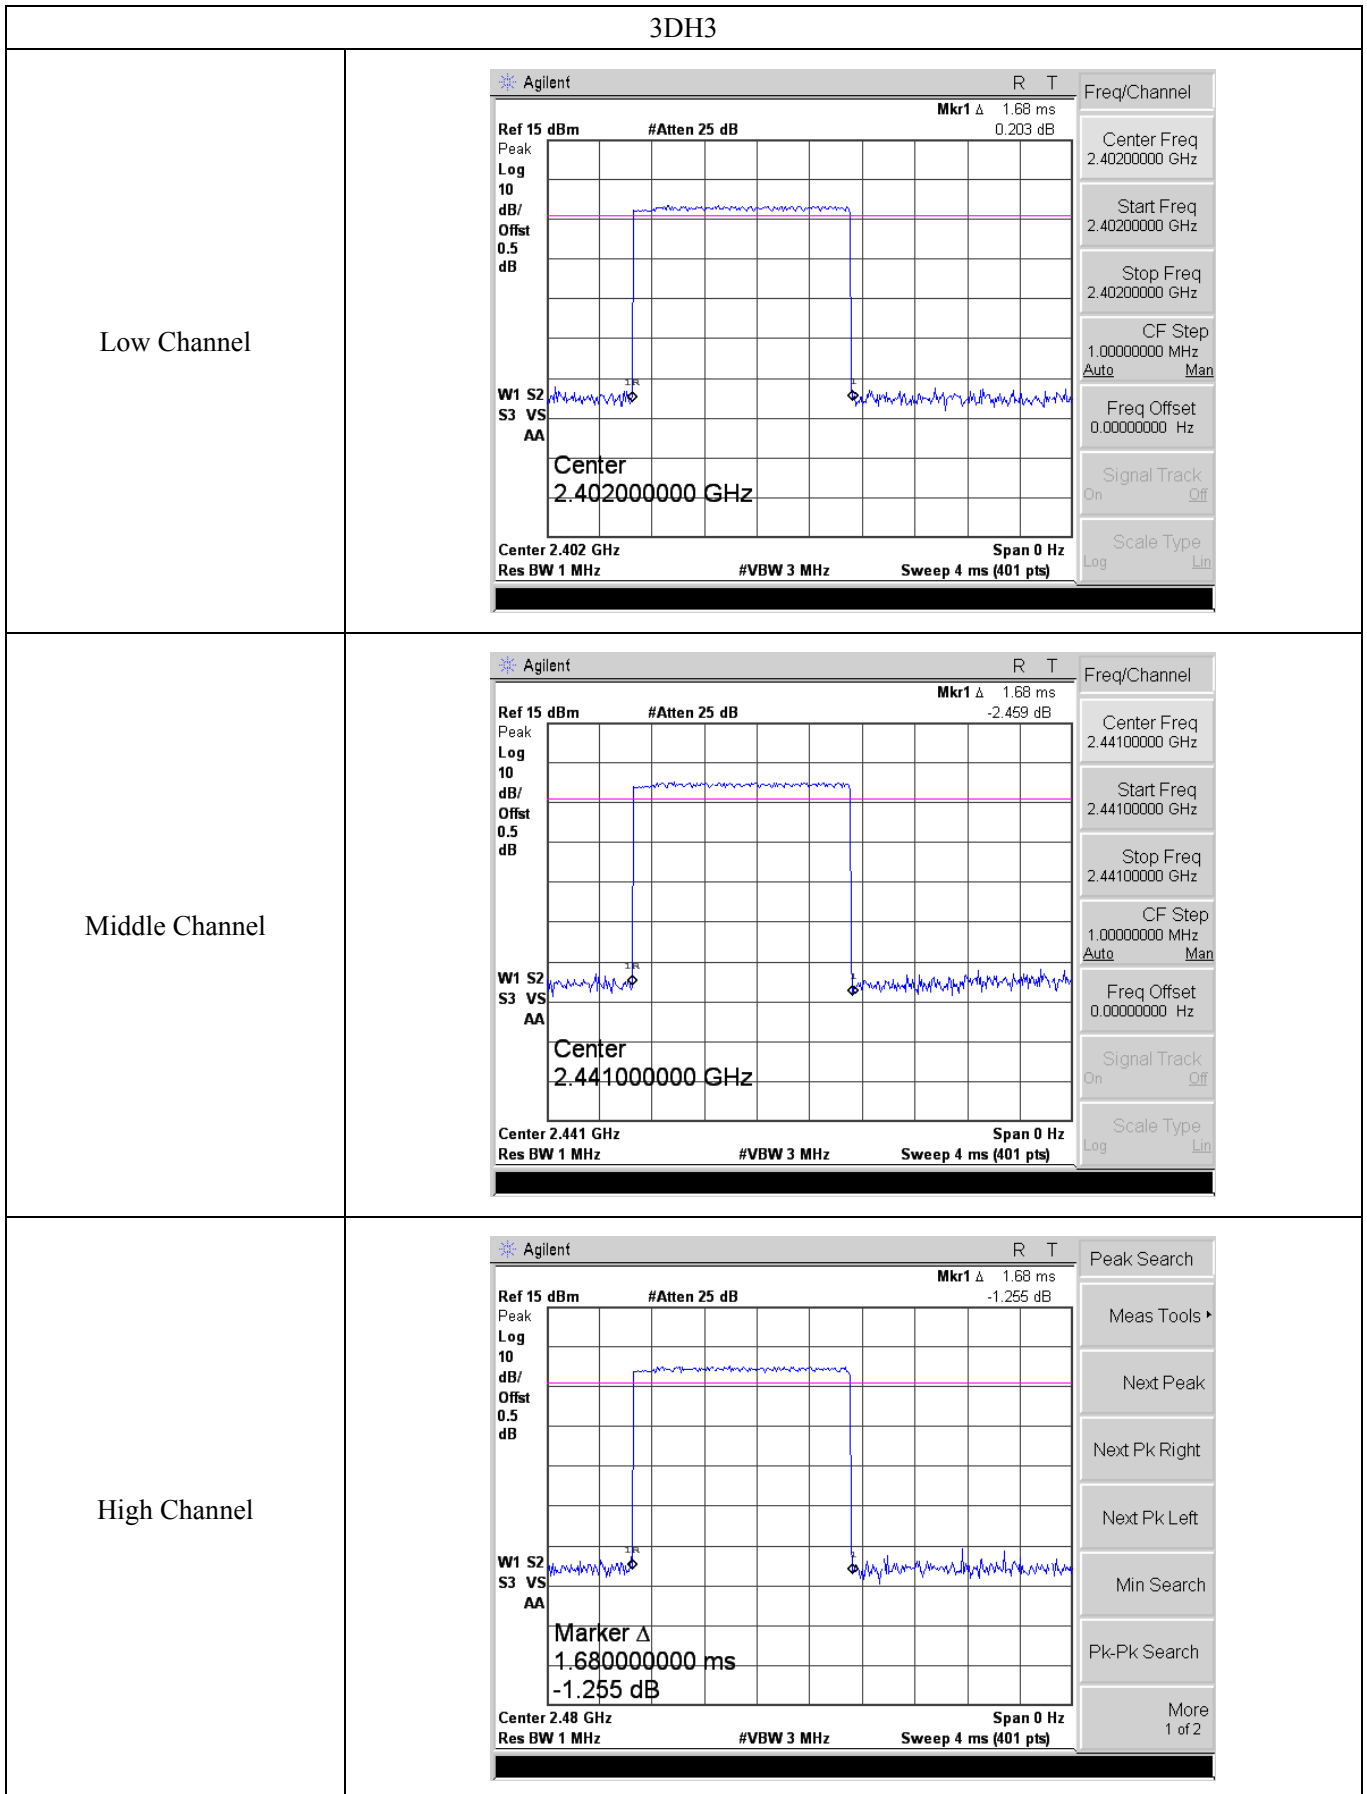

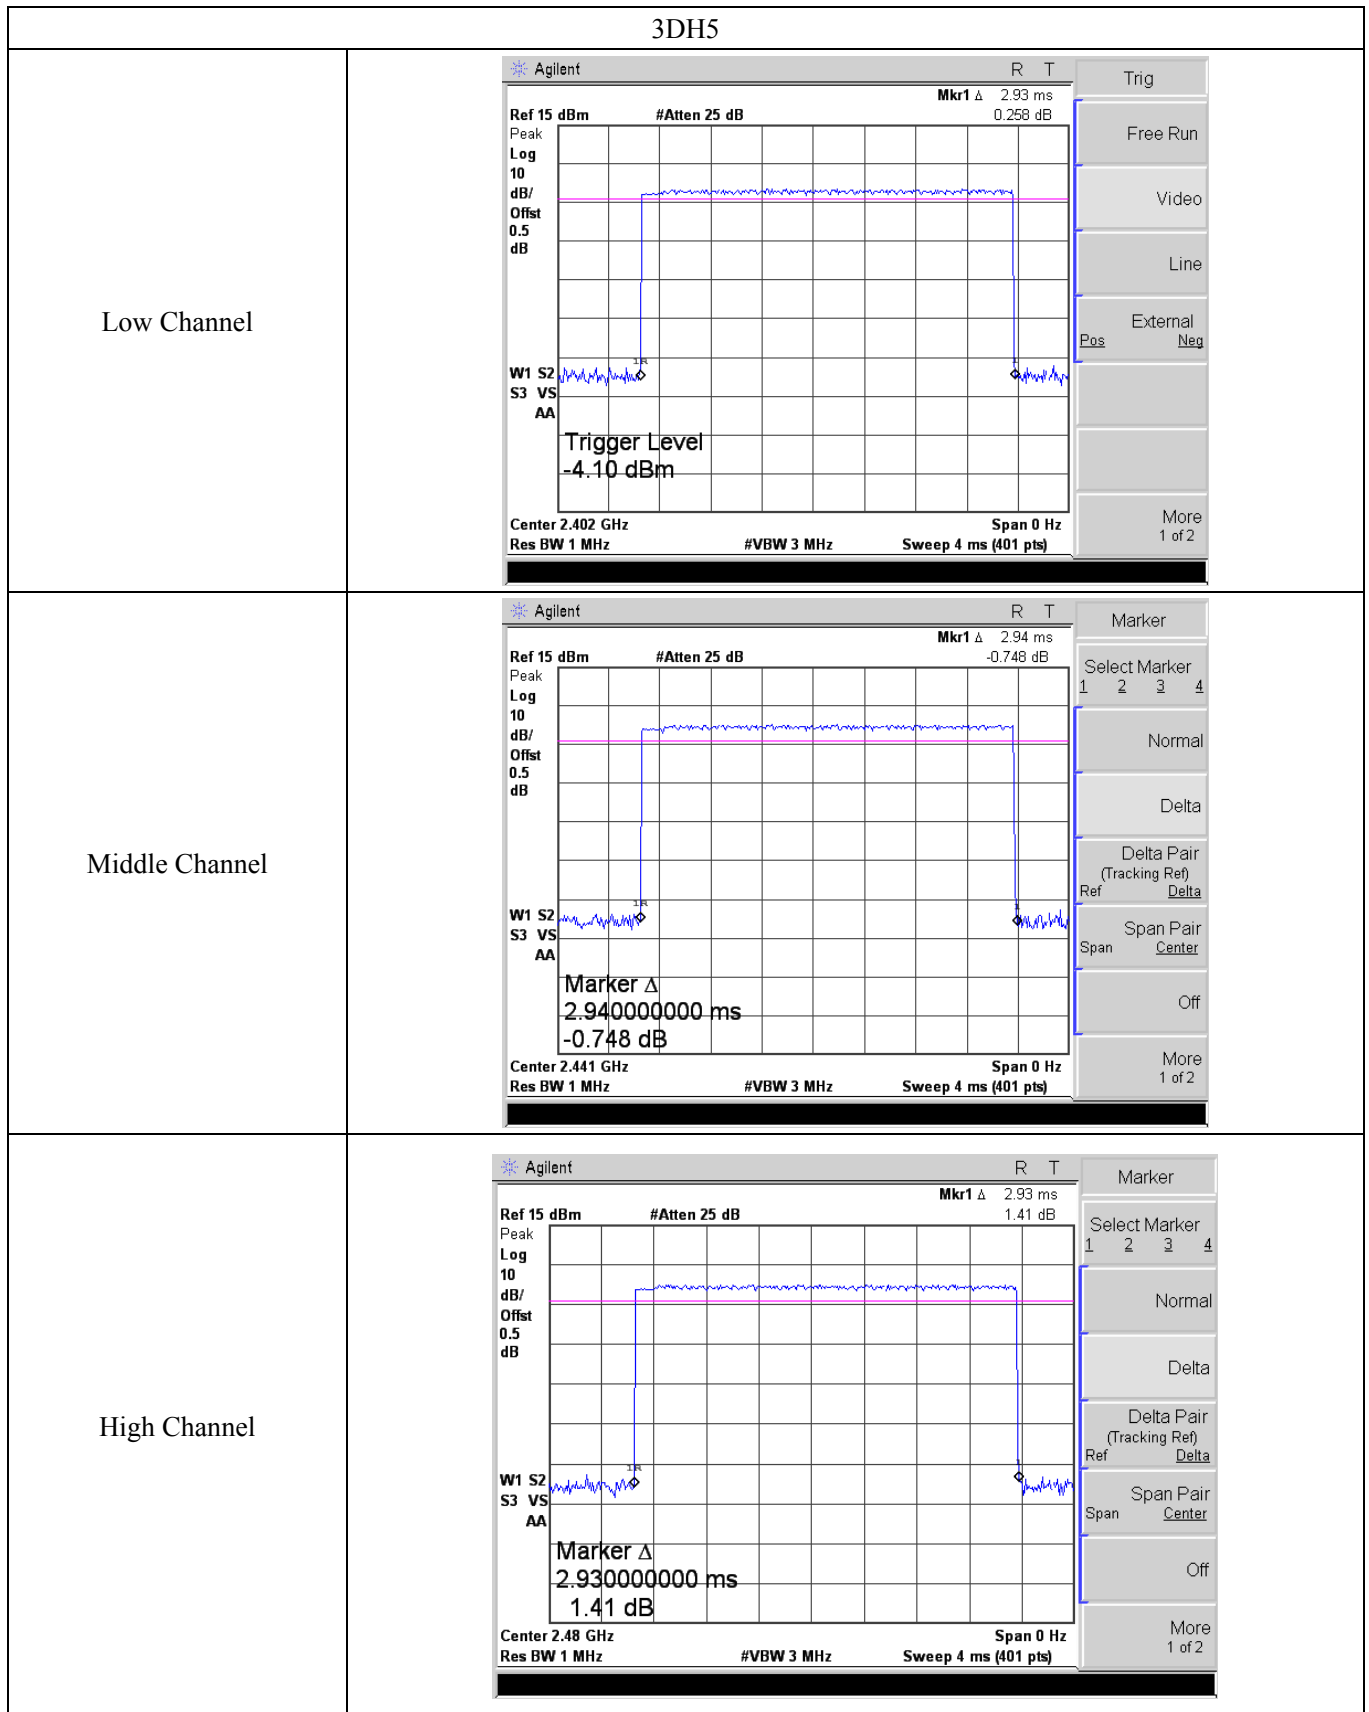

## 8. 20dB Bandwidth

---

### 8.1 Standard Applicable

According to 15.247(a) and 15.215(c), 20dB bandwidth is recommended that the fundamental emission be kept within at least the central 80% of the permitted band in order to minimize the possibility of out-of-band operation.

### 8.2 Test Procedure

According to KDB 558074 D01 v05r02 Subclause 9 and ANSI C63.10-2013 section 6.9.2, the 20dB bandwidth test method as follows.

- a) The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span range for the EMI receiver or spectrum analyzer shall be between two times and five times the OBW.
- b) The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1% to 5% of the OBW and video bandwidth (VBW) shall be approximately three times RBW, unless otherwise specified by the applicable requirement.
- c) Set the reference level of the instrument as required, keeping the signal from exceeding the maximum input mixer level for linear operation. In general, the peak of the spectral envelope shall be more than  $[10 \log (\text{OBW}/\text{RBW})]$  below the reference level.
- d) Steps a) through c) might require iteration to adjust within the specified tolerances.
- e) The dynamic range of the instrument at the selected RBW shall be more than 10 dB below the target “-xx dB down” requirement; that is, if the requirement calls for measuring the -20 dB OBW, the instrument noise floor at the selected RBW shall be at least 30 dB below the reference value.
- f) Set detection mode to peak and trace mode to max hold.
- g) Determine the reference value: Set the EUT to transmit an unmodulated carrier or modulated signal, as applicable. Allow the trace to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace (this is the reference value).
- h) Determine the “-xx dB down amplitude” using  $[(\text{reference value}) - \text{xx}]$ . Alternatively, this calculation may be made by using the marker-delta function of the instrument.
- i) If the reference value is determined by an unmodulated carrier, then turn the EUT modulation ON, and either clear the existing trace or start a new trace on the spectrum analyzer and allow the new trace to stabilize. Otherwise, the trace from step g) shall be used for step j).
- j) Place two markers, one at the lowest frequency and the other at the highest frequency of the envelope of the spectral display, such that each marker is at or slightly below the “-xx dB down amplitude” determined in step h). If a marker is below this “-xx dB down amplitude” value, then it shall be as close as possible to this value. The occupied bandwidth is the frequency difference between the two markers. Alternatively, set a marker at the lowest frequency of the envelope of the spectral display, such that the marker is at or slightly below the “-xx dB down amplitude” determined in step h). Reset the marker-delta function and move the marker to the other side of the emission until the delta marker amplitude is at the same level as the reference marker amplitude. The marker-delta frequency reading at this point is the specified emission bandwidth.
- k) The occupied bandwidth shall be reported by providing plot(s) of the measuring instrument display; the plot

axes and the scale units per division shall be clearly labeled. Tabular data may be reported in addition to the plot(s).

### 8.3 Summary of Test Results/Plots

Test Mode	Test Channel MHz	20 dB Bandwidth MHz	Result
GFSK	2402	1.034	Pass
	2441	1.037	Pass
	2480	1.034	Pass
Pi/4 QDPSK	2402	1.348	Pass
	2441	1.354	Pass
	2480	1.358	Pass
8DPSK	2402	1.378	Pass
	2441	1.382	Pass
	2480	1.385	Pass

GFSK																	
Low Channel	<p>Agilent R T Trace/View</p> <p>Ch Freq 2.402 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p><b>VBW 100.000000 kHz</b></p> <p>Ref 15 dBm #Atten 25 dB</p> <p>#Peak</p> <p>Log 10 dB/Offset 0.5 dB</p> <p>Center 2.402 GHz Span 3 MHz</p> <p>#Res BW 30 kHz #VBW 100 kHz Sweep 5 ms (401 pts)</p> <table border="1"> <tr> <td colspan="2"><b>Occupied Bandwidth</b></td> <td>Occ BW % Pwr</td> <td>99.00 %</td> </tr> <tr> <td colspan="2">903.7438 kHz</td> <td>x dB</td> <td>-20.00 dB</td> </tr> <tr> <td>Transmit Freq Error</td> <td colspan="3">-5.941 kHz</td> </tr> <tr> <td>x dB Bandwidth</td> <td colspan="3">1.034 MHz</td> </tr> </table> <p>Trace/View: 1 Trace 2 3</p> <p>Clear Write</p> <p>Max Hold</p> <p>Min Hold</p> <p>View</p> <p>Blank</p> <p>More 1 of 2</p>	<b>Occupied Bandwidth</b>		Occ BW % Pwr	99.00 %	903.7438 kHz		x dB	-20.00 dB	Transmit Freq Error	-5.941 kHz			x dB Bandwidth	1.034 MHz		
<b>Occupied Bandwidth</b>		Occ BW % Pwr	99.00 %														
903.7438 kHz		x dB	-20.00 dB														
Transmit Freq Error	-5.941 kHz																
x dB Bandwidth	1.034 MHz																
Middle Channel	<p>Agilent R T Trace/View</p> <p>Ch Freq 2.441 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p><b>Center 2.48000000 GHz</b></p> <p>Ref 15 dBm #Atten 25 dB</p> <p>#Peak</p> <p>Log 10 dB/Offset 0.5 dB</p> <p>Center 2.441 GHz Span 3 MHz</p> <p>#Res BW 30 kHz #VBW 100 kHz Sweep 5 ms (401 pts)</p> <table border="1"> <tr> <td colspan="2"><b>Occupied Bandwidth</b></td> <td>Occ BW % Pwr</td> <td>99.00 %</td> </tr> <tr> <td colspan="2">902.5125 kHz</td> <td>x dB</td> <td>-20.00 dB</td> </tr> <tr> <td>Transmit Freq Error</td> <td colspan="3">-7.111 kHz</td> </tr> <tr> <td>x dB Bandwidth</td> <td colspan="3">1.037 MHz</td> </tr> </table> <p>Trace/View: 1 Trace 2 3</p> <p>Clear Write</p> <p>Max Hold</p> <p>Min Hold</p> <p>View</p> <p>Blank</p> <p>More 1 of 2</p>	<b>Occupied Bandwidth</b>		Occ BW % Pwr	99.00 %	902.5125 kHz		x dB	-20.00 dB	Transmit Freq Error	-7.111 kHz			x dB Bandwidth	1.037 MHz		
<b>Occupied Bandwidth</b>		Occ BW % Pwr	99.00 %														
902.5125 kHz		x dB	-20.00 dB														
Transmit Freq Error	-7.111 kHz																
x dB Bandwidth	1.037 MHz																
High Channel	<p>Agilent R T Freq/Channel</p> <p>Ch Freq 2.48 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p><b>Center 2.48000000 GHz</b></p> <p>Ref 15 dBm #Atten 25 dB</p> <p>#Peak</p> <p>Log 10 dB/Offset 0.5 dB</p> <p>Center 2.48 GHz Span 3 MHz</p> <p>#Res BW 30 kHz #VBW 100 kHz Sweep 5 ms (401 pts)</p> <table border="1"> <tr> <td colspan="2"><b>Occupied Bandwidth</b></td> <td>Occ BW % Pwr</td> <td>99.00 %</td> </tr> <tr> <td colspan="2">907.5519 kHz</td> <td>x dB</td> <td>-20.00 dB</td> </tr> <tr> <td>Transmit Freq Error</td> <td colspan="3">-5.334 kHz</td> </tr> <tr> <td>x dB Bandwidth</td> <td colspan="3">1.034 MHz</td> </tr> </table> <p>Freq/Channel: Center Freq 2.48000000 GHz</p> <p>Start Freq 2.47850000 GHz</p> <p>Stop Freq 2.48150000 GHz</p> <p>CF Step 300.000000 kHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>	<b>Occupied Bandwidth</b>		Occ BW % Pwr	99.00 %	907.5519 kHz		x dB	-20.00 dB	Transmit Freq Error	-5.334 kHz			x dB Bandwidth	1.034 MHz		
<b>Occupied Bandwidth</b>		Occ BW % Pwr	99.00 %														
907.5519 kHz		x dB	-20.00 dB														
Transmit Freq Error	-5.334 kHz																
x dB Bandwidth	1.034 MHz																

Pi/4 QDPSK	
Low Channel	<p>Agilent R T Trace/View</p> <p>Ch Freq 2.402 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Center 2.40200000 GHz</p> <p>Ref 15 dBm #Atten 25 dB</p> <p>#Peak</p> <p>Log 10</p> <p>dB/</p> <p>Offset 0.5</p> <p>dB</p> <p>Center 2.402 GHz Span 3 MHz</p> <p>#Res BW 30 kHz #VBW 100 kHz Sweep 5 ms (401 pts)</p> <p><b>Occupied Bandwidth</b> Occ BW % Pwr 99.00 %</p> <p><b>1.1926 MHz</b> x dB -20.00 dB</p> <p>Transmit Freq Error -9.785 kHz</p> <p>x dB Bandwidth 1.348 MHz</p>
Middle Channel	<p>Agilent R T Trace/View</p> <p>Ch Freq 2.441 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Center 2.441 GHz</p> <p>Ref 15 dBm #Atten 25 dB</p> <p>#Peak</p> <p>Log 10</p> <p>dB/</p> <p>Offset 0.5</p> <p>dB</p> <p>Center 2.441 GHz Span 3 MHz</p> <p>#Res BW 30 kHz #VBW 100 kHz Sweep 5 ms (401 pts)</p> <p><b>Occupied Bandwidth</b> Occ BW % Pwr 99.00 %</p> <p><b>1.2036 MHz</b> x dB -20.00 dB</p> <p>Transmit Freq Error -10.826 kHz</p> <p>x dB Bandwidth 1.354 MHz</p>
High Channel	<p>Agilent R T Trace/View</p> <p>Ch Freq 2.48 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Center 2.48 GHz</p> <p>Ref 15 dBm #Atten 25 dB</p> <p>#Peak</p> <p>Log 10</p> <p>dB/</p> <p>Offset 0.5</p> <p>dB</p> <p>Center 2.48 GHz Span 3 MHz</p> <p>#Res BW 30 kHz #VBW 100 kHz Sweep 5 ms (401 pts)</p> <p><b>Occupied Bandwidth</b> Occ BW % Pwr 99.00 %</p> <p><b>1.2109 MHz</b> x dB -20.00 dB</p> <p>Transmit Freq Error -12.316 kHz</p> <p>x dB Bandwidth 1.358 MHz</p>

8DPSK	
Low Channel	<p>Agilent R T Trace/View</p> <p>Ch Freq 2.402 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 15 dBm #Atten 25 dB</p> <p>#Peak Log 10 dB/ Offst 0.5 dB</p> <p>Center 2.402 GHz Span 3 MHz</p> <p>#Res BW 30 kHz #VBW 100 kHz Sweep 5 ms (401 pts)</p> <p><b>Occupied Bandwidth</b> 1.2340 MHz</p> <p>Occ BW % Pwr 99.00 % x dB -20.00 dB</p> <p>Transmit Freq Error -21.836 kHz</p> <p>x dB Bandwidth 1.378 MHz</p>
Middle Channel	<p>Agilent R T Freq/Channel</p> <p>Ch Freq 2.441 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p><b>Center 2.441000000 GHz</b></p> <p>Ref 15 dBm #Atten 25 dB</p> <p>#Peak Log 10 dB/ Offst 0.5 dB</p> <p>Center 2.441 GHz Span 3 MHz</p> <p>#Res BW 30 kHz #VBW 100 kHz Sweep 5 ms (401 pts)</p> <p><b>Occupied Bandwidth</b> 1.2466 MHz</p> <p>Occ BW % Pwr 99.00 % x dB -20.00 dB</p> <p>Transmit Freq Error -20.947 kHz</p> <p>x dB Bandwidth 1.382 MHz</p>
High Channel	<p>Agilent R T Trace/View</p> <p>Ch Freq 2.48 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p><b>Center 2.480000000 GHz</b></p> <p>Ref 15 dBm #Atten 25 dB</p> <p>#Peak Log 10 dB/ Offst 0.5 dB</p> <p>Center 2.48 GHz Span 3 MHz</p> <p>#Res BW 30 kHz #VBW 100 kHz Sweep 5 ms (401 pts)</p> <p><b>Occupied Bandwidth</b> 1.2608 MHz</p> <p>Occ BW % Pwr 99.00 % x dB -20.00 dB</p> <p>Transmit Freq Error -18.386 kHz</p> <p>x dB Bandwidth 1.385 MHz</p>

## 9. RF Output Power

---

### 9.1 Standard Applicable

According to 15.247(b)(1), for frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725–5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400–2483.5 MHz band: 0.125 watts.

### 9.2 Test Procedure

According to KDB 558074 D01 v05r02 Subclause 9 and ANSI C63.10-2013 section 7.8.5, the output power test method as follows.

Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.

This is an RF-conducted test to evaluate maximum peak output power. Use a direct connection between the antenna port of the unlicensed wireless device and the spectrum analyzer, through suitable attenuation. The hopping shall be disabled for this test:

- a) Use the following spectrum analyzer settings:
  - 1) Span: Approximately five times the 20 dB bandwidth, centered on a hopping channel.
  - 2) RBW > 20 dB bandwidth of the emission being measured.
  - 3) VBW  $\geq$  RBW.
  - 4) Sweep: Auto.
  - 5) Detector function: Peak.
  - 6) Trace: Max hold.
- b) Allow trace to stabilize.
- c) Use the marker-to-peak function to set the marker to the peak of the emission.
- d) The indicated level is the peak output power, after any corrections for external attenuators and cables.
- e) A plot of the test results and setup description shall be included in the test report.

### 9.3 Summary of Test Results/Plots



Modulation type	Channel	Output power (dBm)	Output power (mW)	Limit (mW)	Result
GFSK	Low	0.79	1.20	1000	Pass
	Middle	3.23	2.10		
	High	3.71	2.35		
$\pi/4$ DQPSK	Low	2.08	1.61	1000	Pass
	Middle	4.24	2.65		
	High	4.60	2.88		
8DPSK	Low	2.36	1.72	1000	Pass
	Middle	4.41	2.76		
	High	4.70	2.95		

GFSK	
Low Channel	<p>Agilent R T          Ref 15 dBm #Atten 25 dB Mkr1 2.4021250 GHz 0.792 dBm          Peak Search          Meas Tools          Next Peak          Next Pk Right          Next Pk Left          Min Search          Pk-Pk Search          More 1 of 2</p> <p>Marker          2.402125000 GHz          0.792 dBm</p> <p>Center 2.402 GHz Span 5 MHz          #Res BW 1 MHz #VBW 3 MHz Sweep 5 ms (401 pts)</p>
Middle Channel	<p>Agilent R T          Ref 15 dBm #Atten 25 dB Mkr1 2.4410075 GHz 3.232 dBm          Freq/Channel          Center Freq 2.44100000 GHz          Start Freq 2.43850000 GHz          Stop Freq 2.44350000 GHz          CF Step 500.000000 kHz          Auto Man          Freq Offset 0.00000000 Hz          Signal Track On Off          Scale Type Log Lin</p> <p>Center          2.441000000 GHz</p> <p>Center 2.441 GHz Span 5 MHz          #Res BW 1 MHz #VBW 3 MHz Sweep 5 ms (401 pts)</p>
High Channel	<p>Agilent R T          Ref 15 dBm #Atten 25 dB Mkr1 2.4798375 GHz 3.71 dBm          Freq/Channel          Center Freq 2.48000000 GHz          Start Freq 2.47750000 GHz          Stop Freq 2.48250000 GHz          CF Step 500.000000 kHz          Auto Man          Freq Offset 0.00000000 Hz          Signal Track On Off          Scale Type Log Lin</p> <p>Center          2.480000000 GHz</p> <p>Center 2.48 GHz Span 5 MHz          #Res BW 1 MHz #VBW 3 MHz Sweep 5 ms (401 pts)</p>

Pi/4 QDPSK	
Low Channel	
Middle Channel	
High Channel	

8DPSK	
Low Channel	<p>Agilent R T          Ref 15 dBm #Atten 25 dB Mkr1 2.402100 GHz 2.358 dBm          Peak Search          Meas Tools ▾          Next Peak          Next Pk Right          Next Pk Left          Min Search          Pk-Pk Search          More 1 of 2</p> <p>Marker          2.402100000 GHz          2.358 dBm</p> <p>Center 2.402 GHz Span 10 MHz          #Res BW 3 MHz #VBW 3 MHz Sweep 4 ms (401 pts)</p>
Middle Channel	<p>Agilent R T          Ref 15 dBm #Atten 25 dB Mkr1 2.441125 GHz 4.412 dBm          Peak Search          Meas Tools ▾          Next Peak          Next Pk Right          Next Pk Left          Min Search          Pk-Pk Search          More 1 of 2</p> <p>Marker          2.441125000 GHz          4.412 dBm</p> <p>Center 2.441 GHz Span 10 MHz          #Res BW 3 MHz #VBW 3 MHz Sweep 4 ms (401 pts)</p>
High Channel	<p>Agilent R T          Ref 15 dBm #Atten 25 dB Mkr1 2.480000 GHz 4.697 dBm          Peak Search          Meas Tools ▾          Next Peak          Next Pk Right          Next Pk Left          Min Search          Pk-Pk Search          More 1 of 2</p> <p>Marker          2.480000000 GHz          4.697 dBm</p> <p>Center 2.48 GHz Span 10 MHz          #Res BW 3 MHz #VBW 3 MHz Sweep 4 ms (401 pts)</p>

## 10. Field Strength of Spurious Emissions

---

### 10.1 Standard Applicable

According to §15.247(d), in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).


The emission limit in this paragraph is based on measurement instrumentation employing an average detector. The provisions in §15.35 for limiting peak emissions apply. Spurious Radiated Emissions measurements starting below or at the lowest crystal frequency.


### 10.2 Test Procedure

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.205 15.247(a) and FCC Part 15.209 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

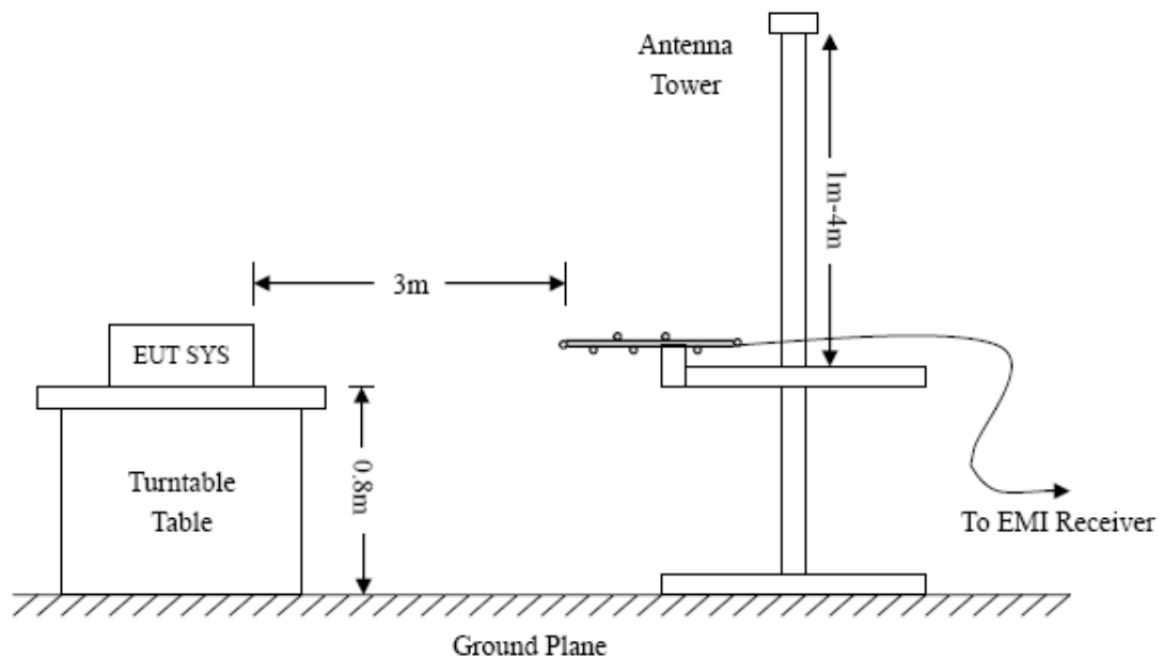

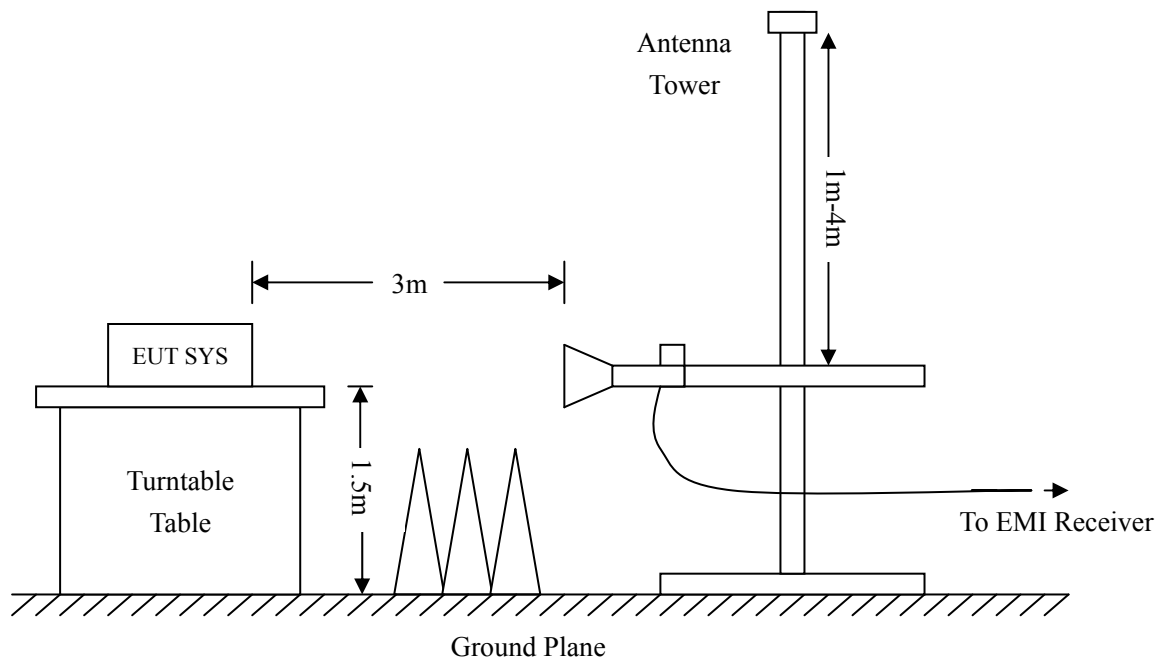

Frequency :9kHz-30MHz

RBW=10KHz,

VBW =30KHz

Sweep time= Auto

Trace = max hold

Detector function = peak

Frequency :30MHz-1GHz

RBW=120KHz,

VBW=300KHz

Sweep time= Auto

Trace = max hold

Detector function = peak, QP

Frequency :Above 1GHz

RBW=1MHz,

VBW=3MHz(Peak), 10Hz(AV)

Sweep time= Auto

Trace = max hold

Detector function = peak, AV

### 10.3 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and the Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Ant. Factor} + \text{Cable Loss} - \text{Ampl. Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -6dB $\mu$ V means the emission is 6dB $\mu$ V below the maximum limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{FCC Part 15 Limit}$$

### 10.4 Summary of Test Results/Plots

*Note: this EUT was tested in 3 orthogonal positions and the worst case position data was reported.*


*All test modes (different data rate and different modulation) are performed, but only the worst case is recorded in this report.*

Waltek Testing Group (Shenzhen) Co., Ltd.

[Http://www.waltek.com.cn](http://www.waltek.com.cn)


➤ Spurious Emissions Below 1GHz

Test Channel	Low	Polarity:	Horizontal
--------------	-----	-----------	------------

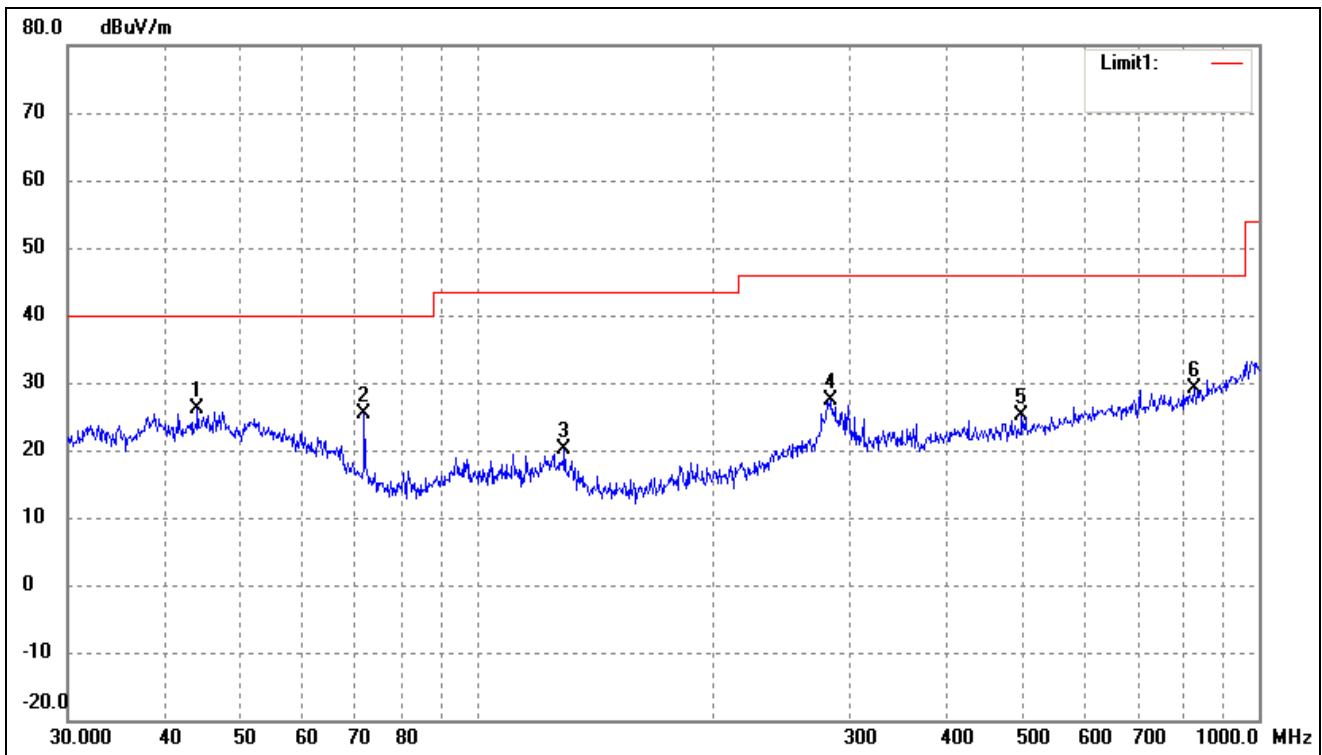

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	43.9658	34.15	-8.00	26.15	40.00	-13.85	357	100	peak
2	71.8320	40.50	-15.22	25.28	40.00	-14.72	93	100	peak
3	129.4678	37.58	-17.50	20.08	43.50	-23.42	339	100	peak
4	283.9792	37.35	-10.07	27.28	46.00	-18.72	112	100	peak
5	497.6765	31.04	-6.00	25.04	46.00	-20.96	88	100	peak
6	827.4934	29.83	-0.76	29.07	46.00	-16.93	289	100	peak


Test Channel	Low	Polarity:	Vertical
--------------	-----	-----------	----------

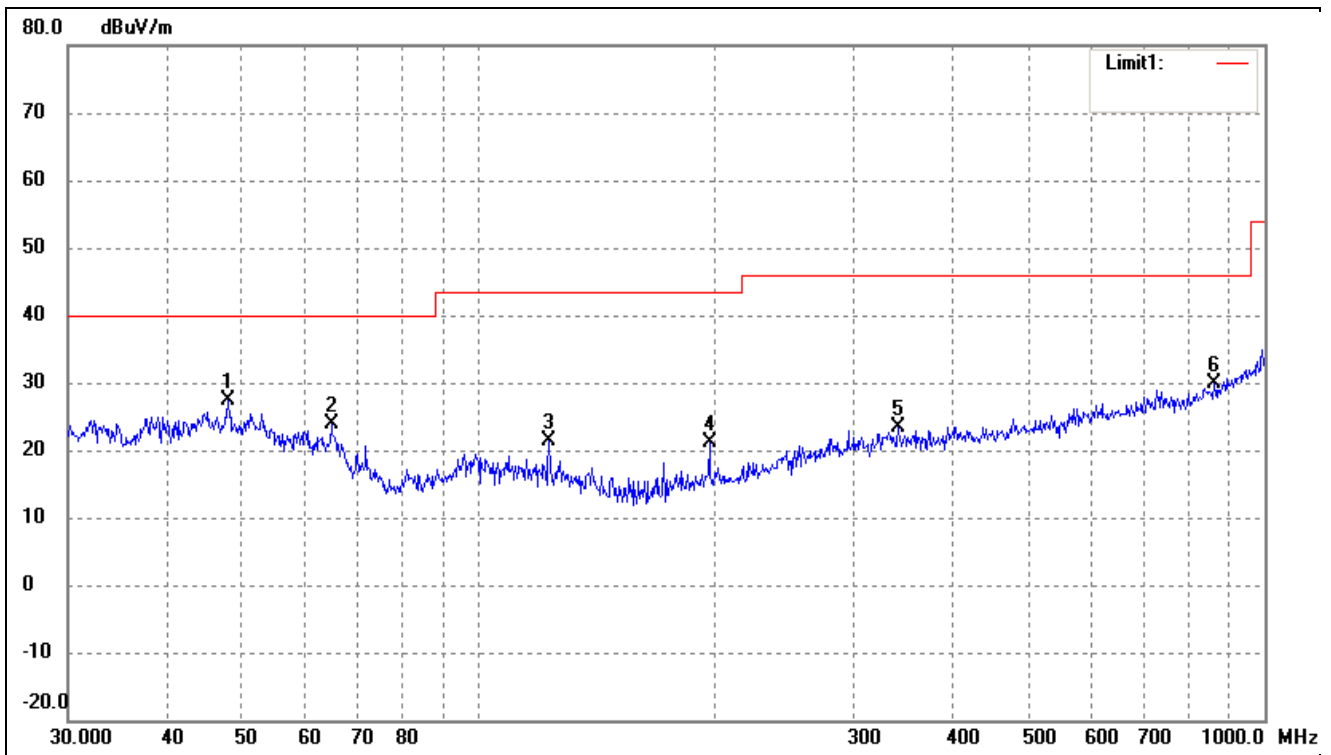

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	47.9940	35.59	-8.16	27.43	40.00	-12.57	288	100	peak
2	64.8865	35.98	-12.13	23.85	40.00	-16.15	97	100	peak
3	122.8340	37.93	-16.59	21.34	43.50	-22.16	75	100	peak
4	196.5098	34.69	-13.45	21.24	43.50	-22.26	101	100	peak
5	341.9787	31.48	-8.07	23.41	46.00	-22.59	62	100	peak
6	863.0562	29.81	0.17	29.98	46.00	-16.02	129	100	peak




Test Channel	Middle	Polarity:	Horizontal
--------------	--------	-----------	------------

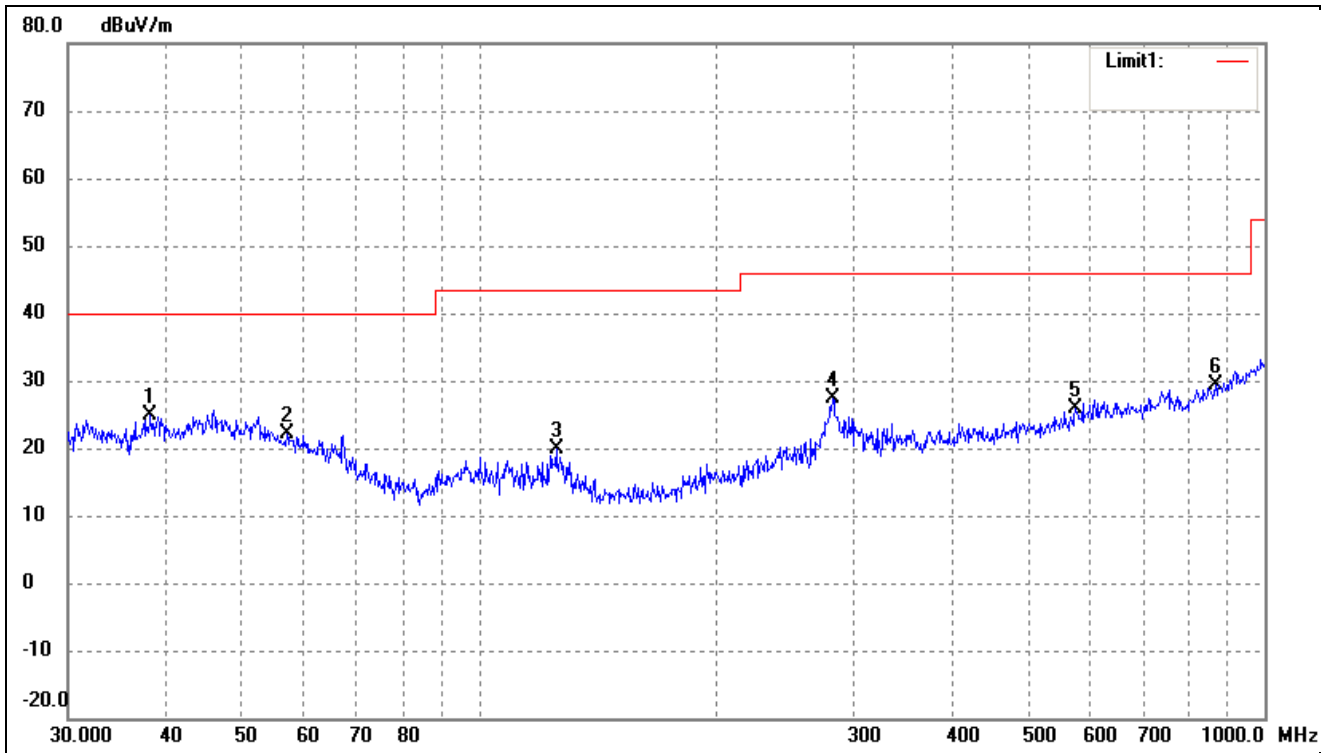


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	38.2120	33.73	-8.75	24.98	40.00	-15.02	188	100	peak
2	56.9912	32.13	-10.06	22.07	40.00	-17.93	96	100	peak
3	125.4457	37.06	-17.07	19.99	43.50	-23.51	57	100	peak
4	281.9946	37.43	-10.07	27.36	46.00	-18.64	209	100	peak
5	574.6258	30.45	-4.57	25.88	46.00	-20.12	50	100	peak
6	866.0879	29.15	0.29	29.44	46.00	-16.56	191	100	peak

Test Channel	Middle	Polarity:	Vertical
--------------	--------	-----------	----------

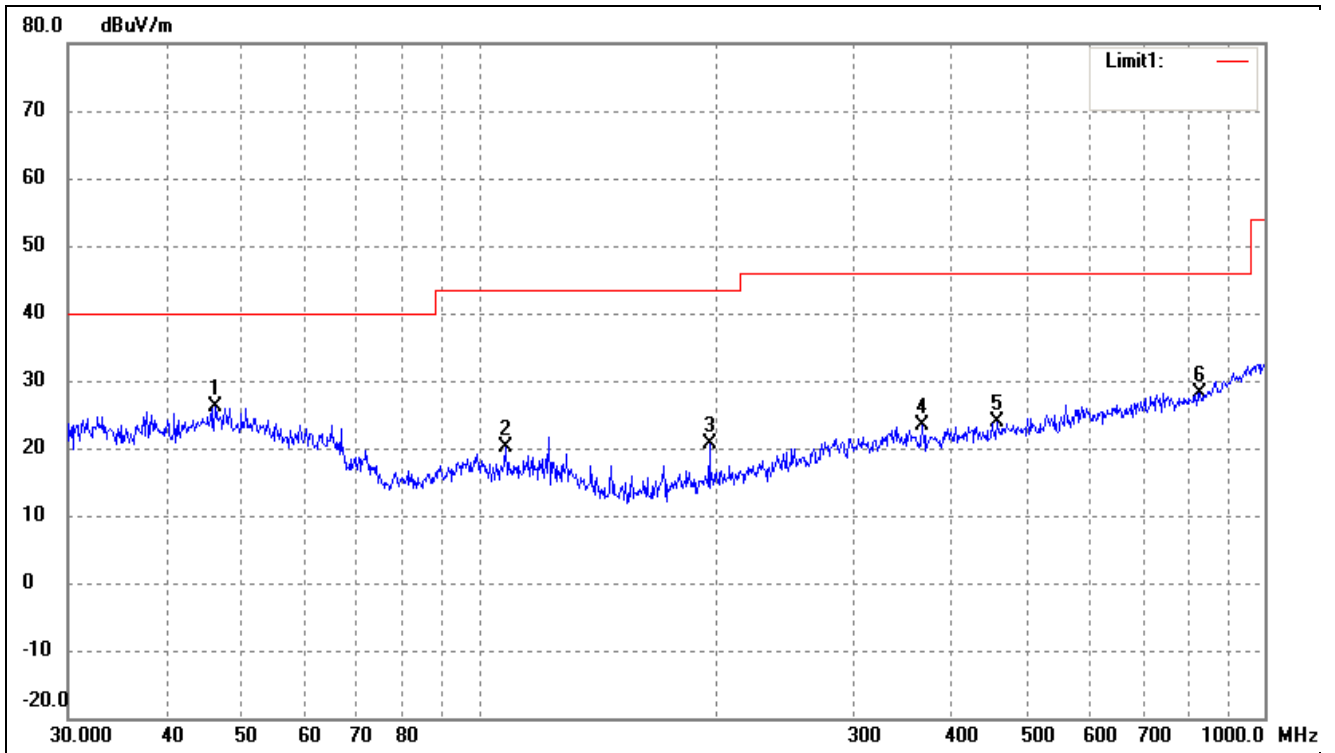


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	46.1780	34.23	-8.08	26.15	40.00	-13.85	215	100	peak
2	108.2667	34.50	-14.45	20.05	43.50	-23.45	314	100	peak
3	196.5098	34.02	-13.45	20.57	43.50	-22.93	63	100	peak
4	366.8231	31.77	-8.28	23.49	46.00	-22.51	329	100	peak
5	455.9058	30.59	-6.80	23.79	46.00	-22.21	130	100	peak
6	827.4934	28.94	-0.76	28.18	46.00	-17.82	336	100	peak

Test Channel	High	Polarity:	Horizontal
--------------	------	-----------	------------

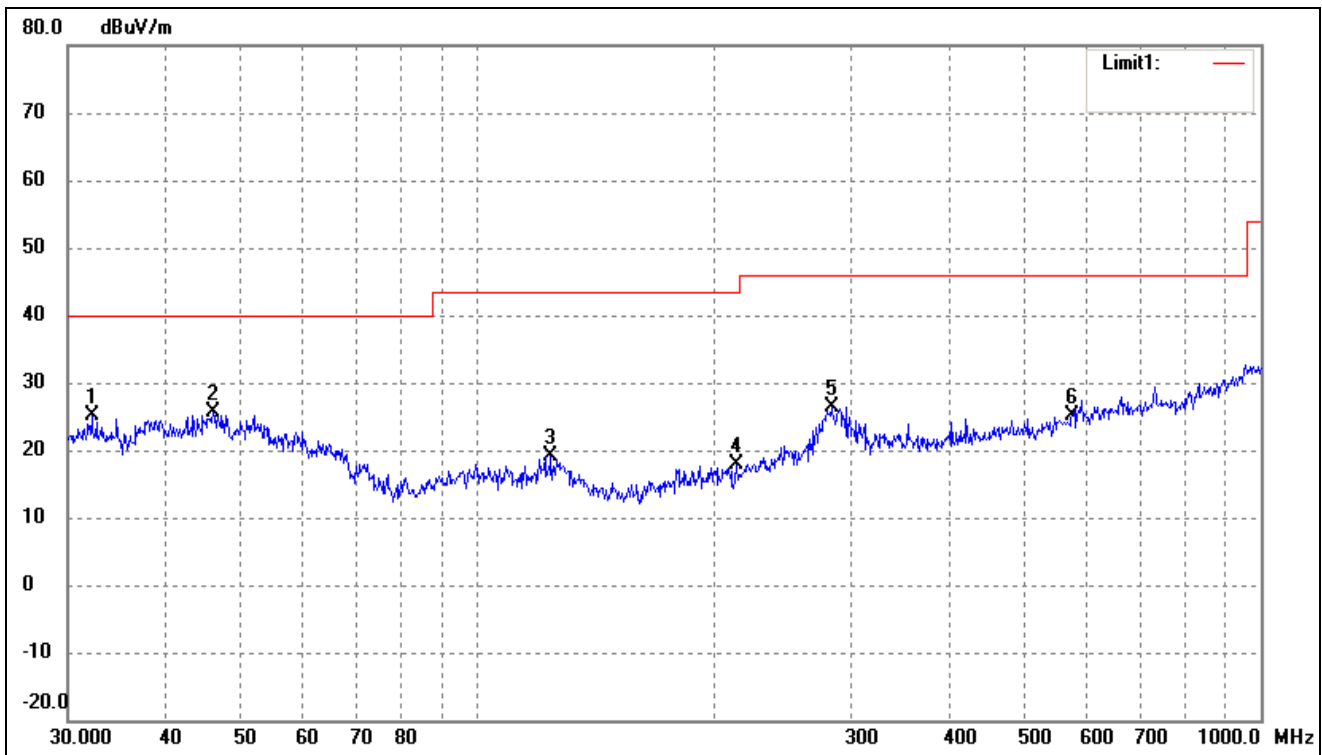

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	32.1795	34.87	-9.73	25.14	40.00	-14.86	103	100	peak
2	46.0164	33.77	-8.09	25.68	40.00	-14.32	119	100	peak
3	124.1330	36.02	-16.86	19.16	43.50	-24.34	53	100	peak
4	213.7634	30.88	-12.99	17.89	43.50	-25.61	148	100	peak
5	282.9852	36.44	-10.07	26.37	46.00	-19.63	206	100	peak
6	574.6258	29.64	-4.57	25.07	46.00	-20.93	176	100	peak

Test Channel	High	Polarity:	Vertical
--------------	------	-----------	----------

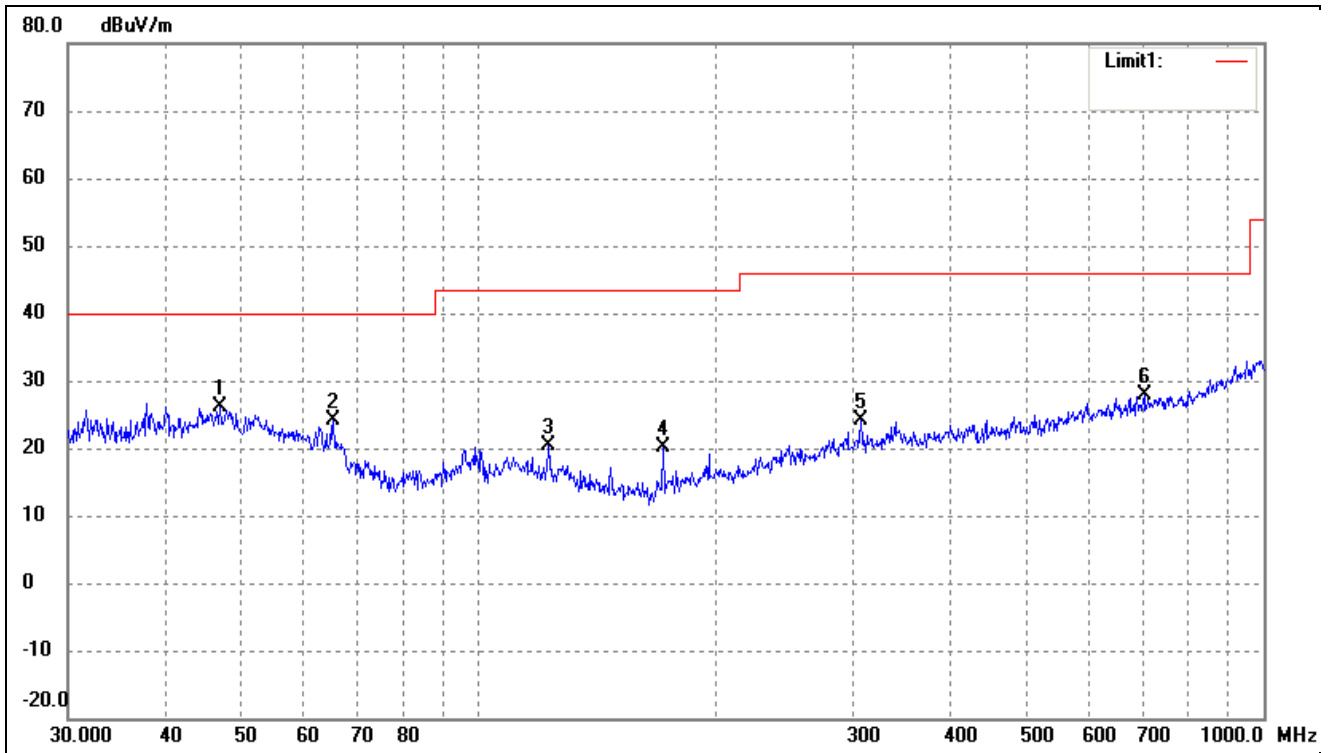

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	46.8303	34.16	-8.11	26.05	40.00	-13.95	74	100	peak
2	65.3432	36.35	-12.32	24.03	40.00	-15.97	187	100	peak
3	122.8340	36.85	-16.59	20.26	43.50	-23.24	146	100	peak
4	171.9946	36.04	-15.93	20.11	43.50	-23.39	99	100	peak
5	306.7537	33.35	-9.17	24.18	46.00	-21.82	79	100	peak
6	704.2261	30.33	-2.56	27.77	46.00	-18.23	270	100	peak

## ➤ Spurious Emissions Above 1GHz

Frequency (MHz)	Reading (dBuV/m)	Correct dB	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Polar H/V	Detector
Low Channel-2402MHz							
4804	60.47	-3.59	56.88	74	-17.12	H	PK
4804	41.97	-3.59	38.38	54	-15.62	H	AV
7206	59.23	-0.52	58.71	74	-15.29	H	PK
7206	40.66	-0.52	40.14	54	-13.86	H	AV
4804	61.72	-3.59	58.13	74	-15.87	V	PK
4804	41.71	-3.59	38.12	54	-15.88	V	AV
7206	56.24	-0.52	55.72	74	-18.28	V	PK
7206	40.30	-0.52	39.78	54	-14.22	V	AV
Middle Channel-2441MHz							
4882	60.23	-3.49	56.74	74	-17.26	H	PK
4882	41.19	-3.49	37.70	54	-16.30	H	AV
7323	60.48	-0.47	60.01	74	-13.99	H	PK
7323	41.94	-0.47	41.47	54	-12.53	H	AV
4882	63.90	-3.49	60.41	74	-13.59	V	PK
4882	39.69	-3.49	36.20	54	-17.80	V	AV
7323	57.56	-0.47	57.09	74	-16.91	V	PK
7323	39.59	-0.47	39.12	54	-14.88	V	AV
High Channel-2480MHz							
4960	61.63	-3.41	58.22	74	-15.78	H	PK
4960	42.67	-3.41	39.26	54	-14.74	H	AV
7440	60.48	-0.42	60.06	74	-13.94	H	PK
7440	41.92	-0.42	41.50	54	-12.50	H	AV
4960	63.58	-3.41	60.17	74	-13.83	V	PK
4960	40.50	-3.41	37.09	54	-16.91	V	AV
7440	58.20	-0.42	57.78	74	-16.22	V	PK
7440	38.71	-0.42	38.29	54	-15.71	V	AV

*Note: Testing is carried out with frequency rang 9kHz to the tenth harmonics, other than listed in the table above are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.*

## 11. Out of Band Emissions

---

### 11.1 Standard Applicable

According to §15.247 (d), in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).

### 11.2 Test Procedure

According to ANSI C63.10-2013 section 7.8.6, the Band-edge measurements for RF conducted emissions test method as follows.

- a) Connect the EMI receiver or spectrum analyzer to the EUT using an appropriate RF cable connected to the EUT output. Configure the spectrum analyzer settings as described in step e) (be sure to enter all losses between the unlicensed wireless device output and the spectrum analyzer).
- b) Set the EUT to the lowest frequency channel (for the hopping on test, the hopping sequence shall include the lowest frequency channel).
- c) Set the EUT to operate at maximum output power and 100% duty cycle, or equivalent “normal mode of operation” as specified in 6.10.3.
- d) If using the radiated method, then use the applicable procedure(s) of 6.4, 6.5, or 6.6, and orient the EUT and measurement antenna positions to produce the highest emission level.
- e) Perform the test as follows:
  - 1) Span: Wide enough to capture the peak level of the emission operating on the channel closest to the band edge, as well as any modulation products that fall outside of the authorized band of operation.
  - 2) Reference level: As required to keep the signal from exceeding the maximum instrument input mixer level for linear operation. In general, the peak of the spectral envelope shall be more than  $[10 \log (\text{OBW}/\text{RBW})]$  below the reference level. Specific guidance is given in 4.1.5.2.
  - 3) Attenuation: Auto (at least 10 dB preferred).
  - 4) Sweep time: Coupled.
  - 5) Resolution bandwidth: 100 kHz.
  - 6) Video bandwidth: 300 kHz.
  - 7) Detector: Peak.
  - 8) Trace: Max hold.
- f) Allow the trace to stabilize. For the test with the hopping function turned ON, this can take several minutes to achieve a reasonable probability of intercepting any emissions due to oscillator overshoot.

- g) Set the marker on the emission at the band edge, or on the highest modulation product outside of the band, if this level is greater than that at the band edge. Enable the marker-delta function, and then use the marker-to-peak function to move the marker to the peak of the in-band emission.
- h) Repeat step c) through step e) for every applicable modulation.
- i) Set the EUT to the highest frequency channel (for the hopping on test, the hopping sequence shall include the highest frequency channel) and repeat step c) through step d).
- j) The band-edge measurement shall be reported by providing plot(s) of the measuring instrument display; the plot axes and the scale units per division shall be clearly labeled. Tabular data may be reported in addition to the plot(s).


Restricted-band band-edge test method please refers to ANSI C63.10-2013 section 6.10.5. The emission must comply with the 15.209 limit for fall in the restricted bands listed in section 15.205. Note that the method of measurement KDB publication number: 913591 may be used for the radiated band-edge measurements.

According to ANSI C63.10-2013 section 7.8.8, Conducted spurious emissions shall be measured for the transmit frequency, per 5.5 and 5.6, and at the maximum transmit powers.

Connect the primary antenna port through an attenuator to the spectrum analyzer input; in the results, account for all losses between the unlicensed wireless device output and the spectrum analyzer. The instrument shall span 30 MHz to 10 times the operating frequency in GHz, with a resolution bandwidth of 100 kHz, video bandwidth of 300 kHz, and a coupled sweep time with a peak detector. The band 30 MHz to the highest frequency may be split into smaller spans, as long as the entire spectrum is covered.

### **11.3 Summary of Test Results/Plots**


Test Channel	Low	Polarity:	Vertical(worst case)
--------------	-----	-----------	----------------------

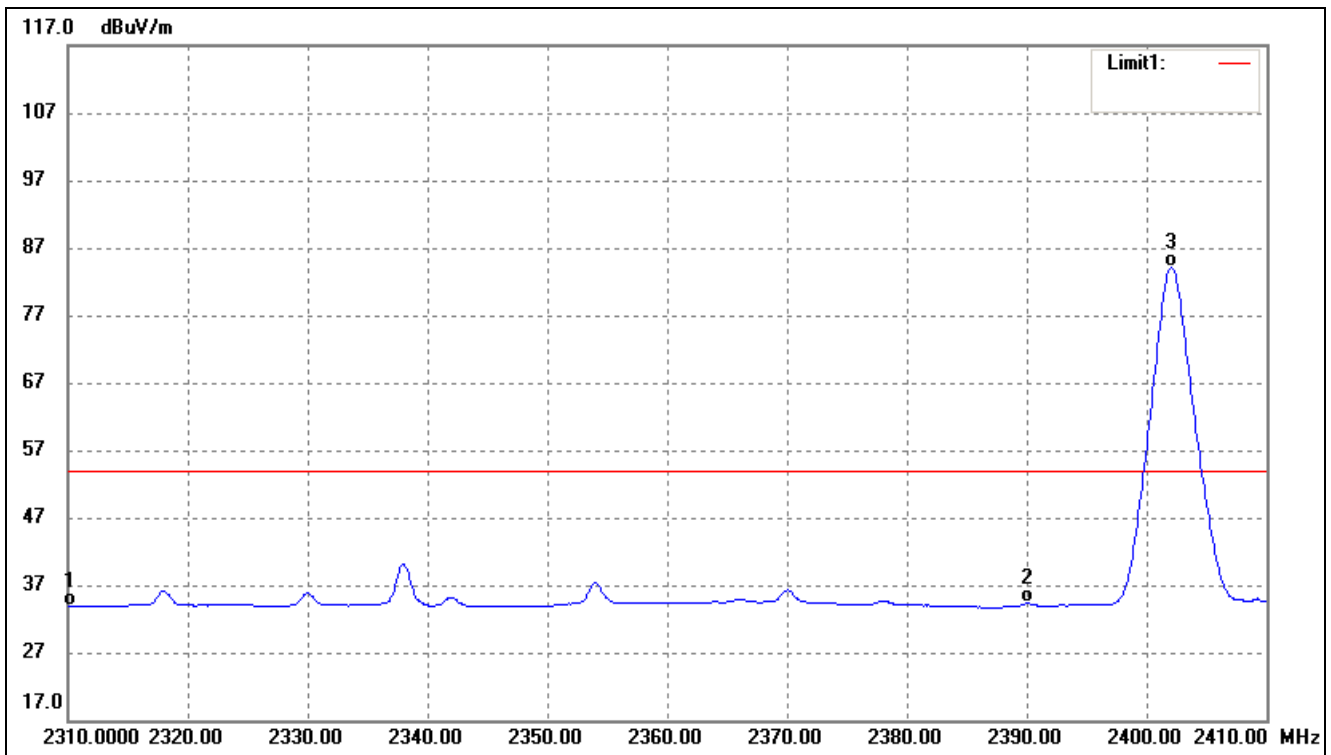

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2310.000	41.71	-7.78	33.93	54.00	-20.07	Average Detector
	2310.000	53.31	-7.78	45.53	74.00	-28.47	Peak Detector
2	2390.000	41.58	-7.32	34.26	54.00	-19.74	Average Detector
	2390.000	54.22	-7.32	46.90	74.00	-27.10	Peak Detector
3	2402.000	91.32	-7.25	84.07	/	/	Average Detector
	2402.000	100.02	-7.25	92.77	/	/	Peak Detector






Test Channel	High	Polarity:	Vertical(worst case)
--------------	------	-----------	----------------------

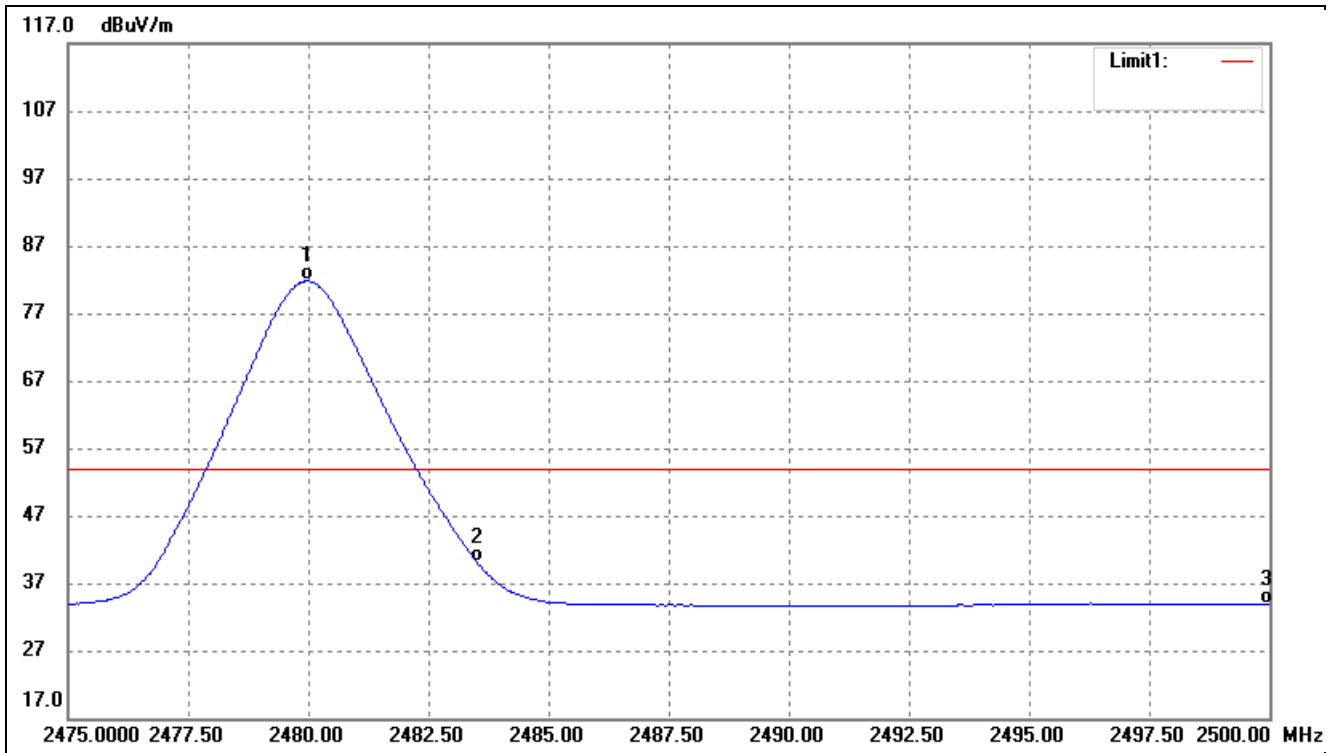

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2479.975	88.58	-6.79	81.79	/	/	Average Detector
	2479.950	100.07	-6.79	93.28	/	/	Peak Detector
2	2483.500	46.95	-6.77	40.18	54.00	-13.82	Average Detector
	2483.500	60.62	-6.77	53.85	74.00	-20.15	Peak Detector
3	2500.000	40.51	-6.67	33.84	54.00	-20.16	Average Detector
	2500.000	53.12	-6.67	46.45	74.00	-27.55	Peak Detector



Worst mode DH1

Low channel

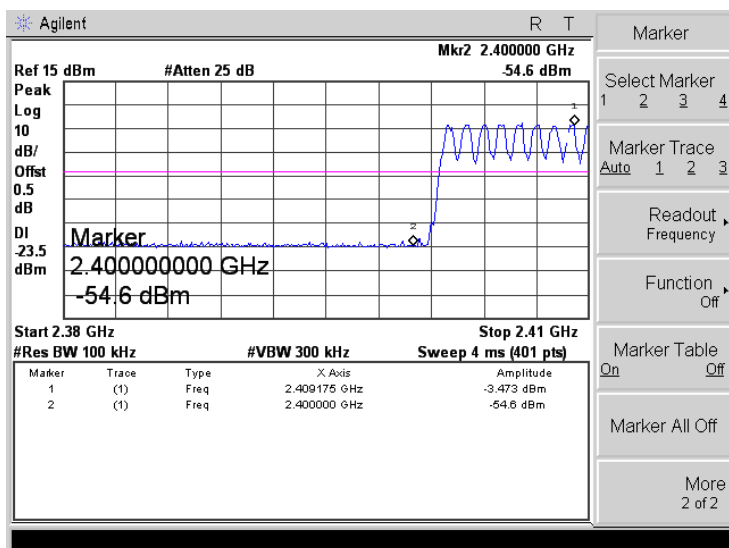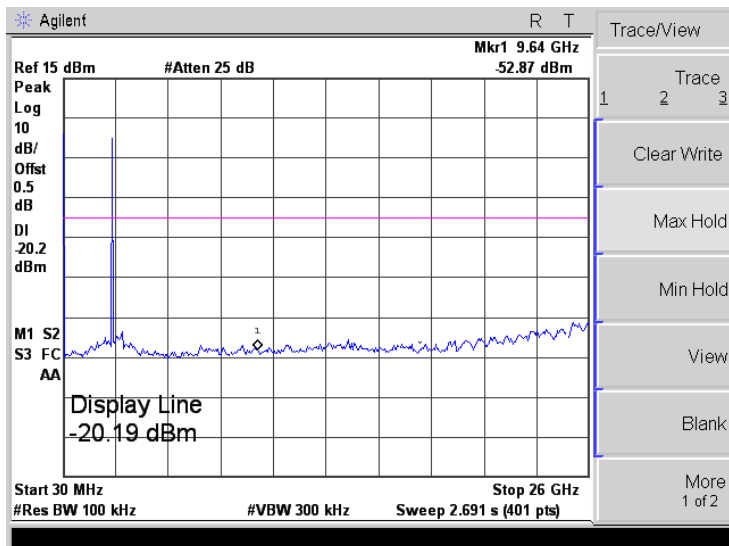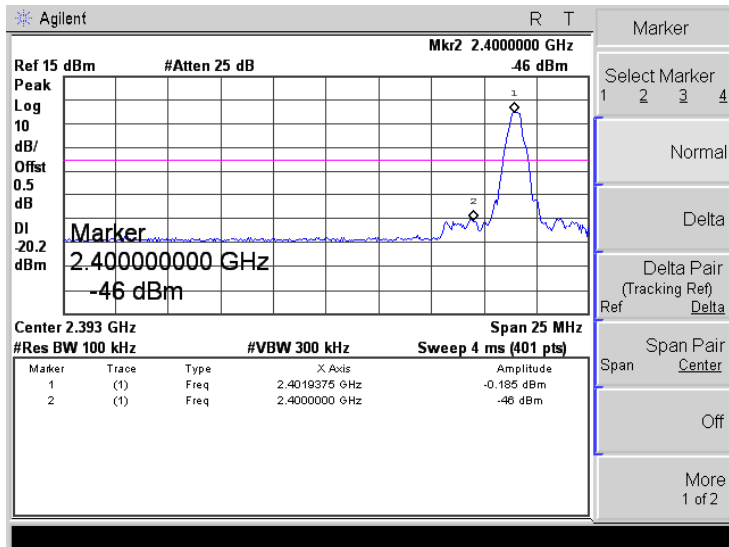


Worst mode DH1



Middle channel

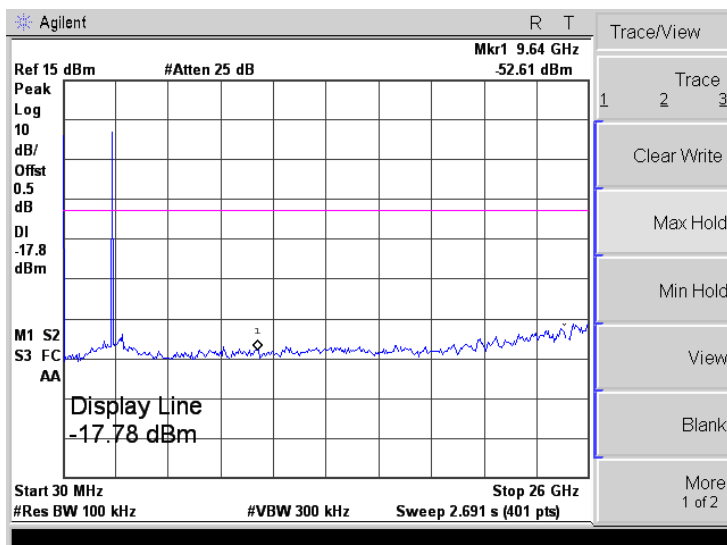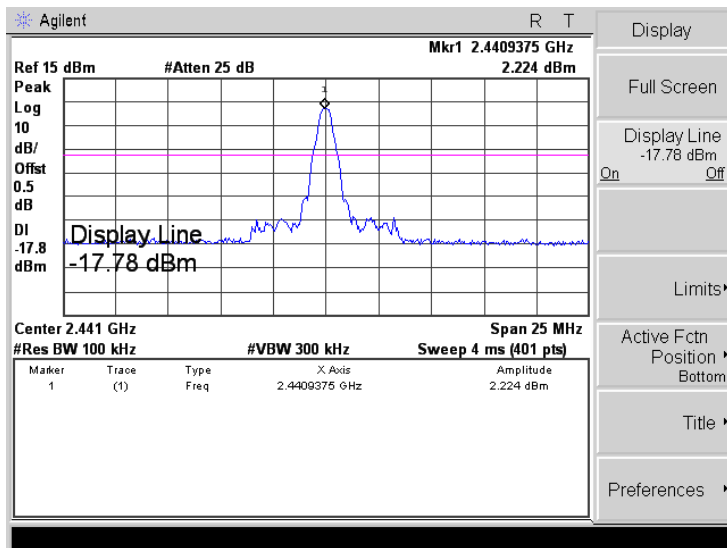

Worst mode DH1

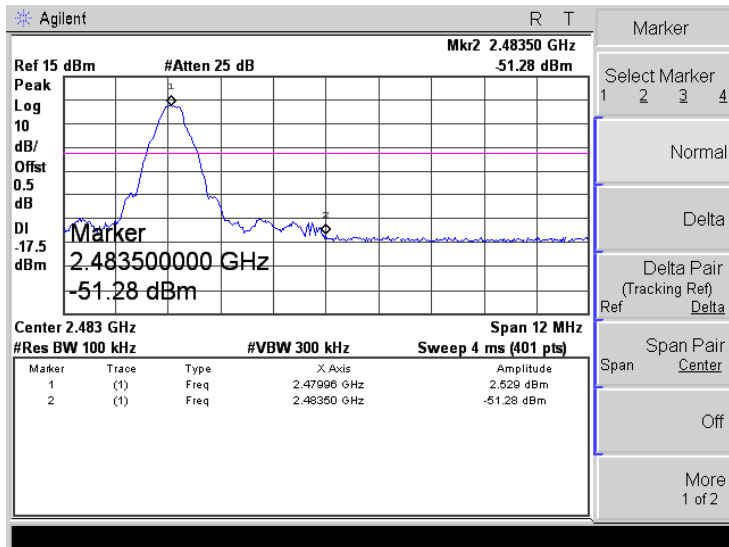

High channel

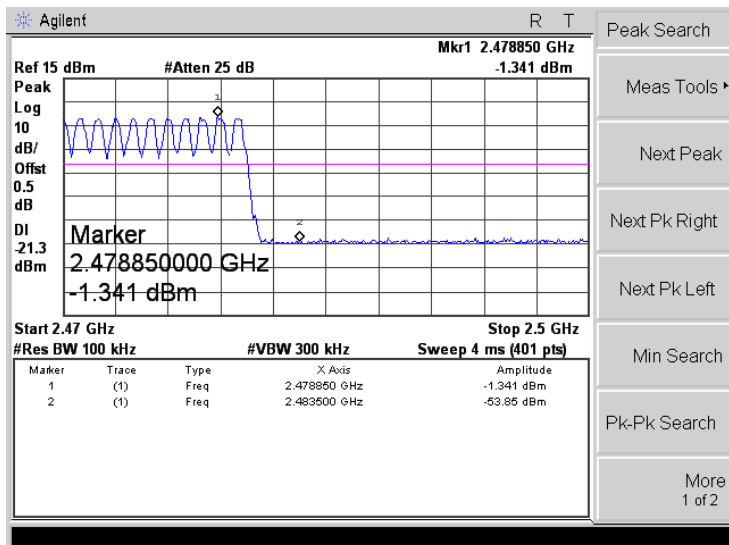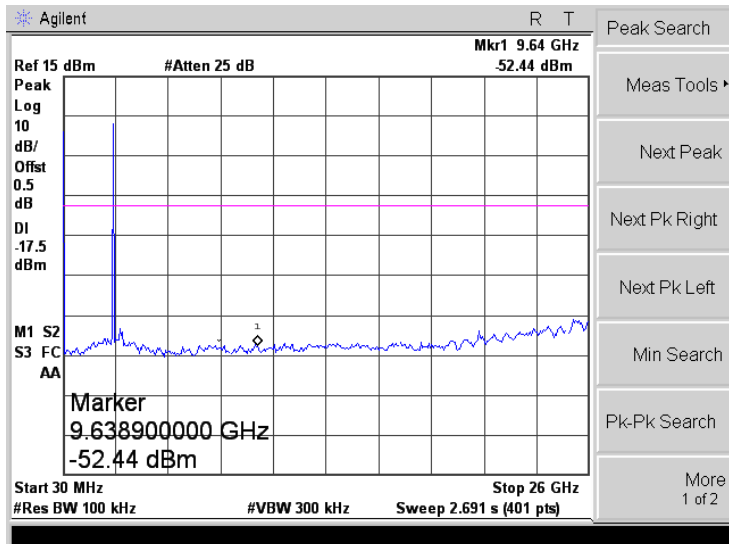


## 12. Conducted Emissions

### 12.1 Test Procedure

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle. The spacing between the peripherals was 10 cm.

### 12.2 Basic Test Setup Block Diagram

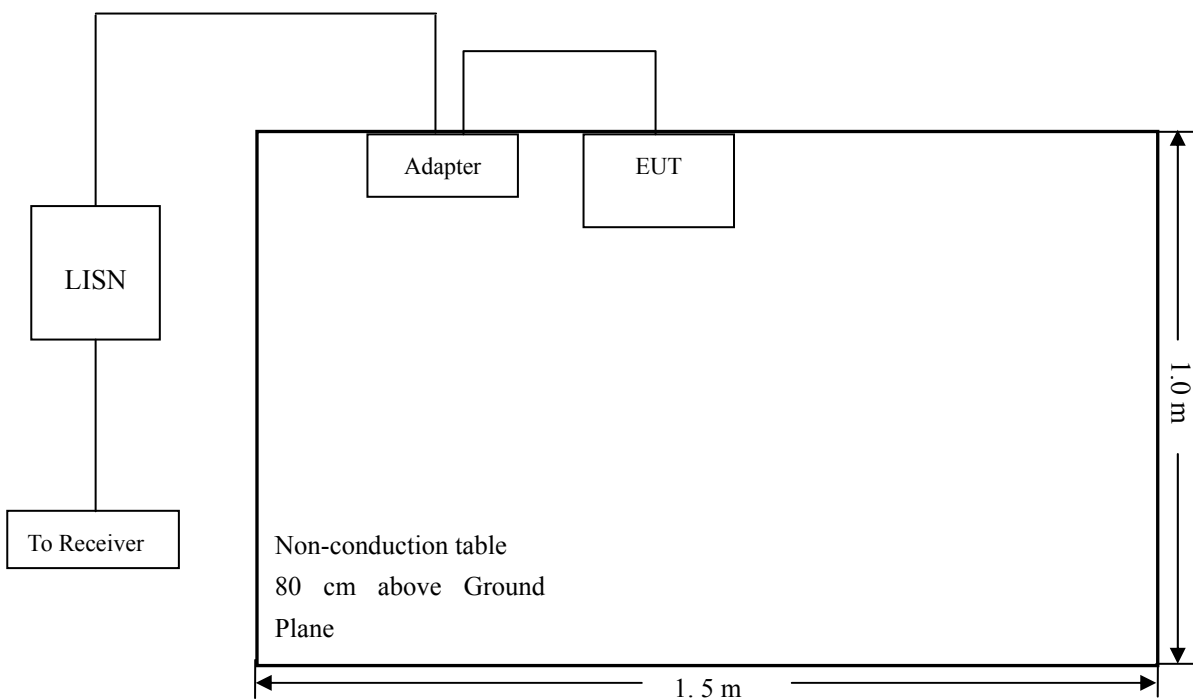


### 12.3 Test Receiver Setup

During the conducted emission test, the test receiver was set with the following configurations:

Start Frequency .....	150 kHz
Stop Frequency .....	30 MHz
Sweep Speed .....	Auto
IF Bandwidth.....	10 kHz
Quasi-Peak Adapter Bandwidth .....	9 kHz
Quasi-Peak Adapter Mode .....	Normal


### 12.4 Summary of Test Results/Plots

Test Mode	Communication	AC120V 60Hz	Polarity:	Neutral
-----------	---------------	-------------	-----------	---------

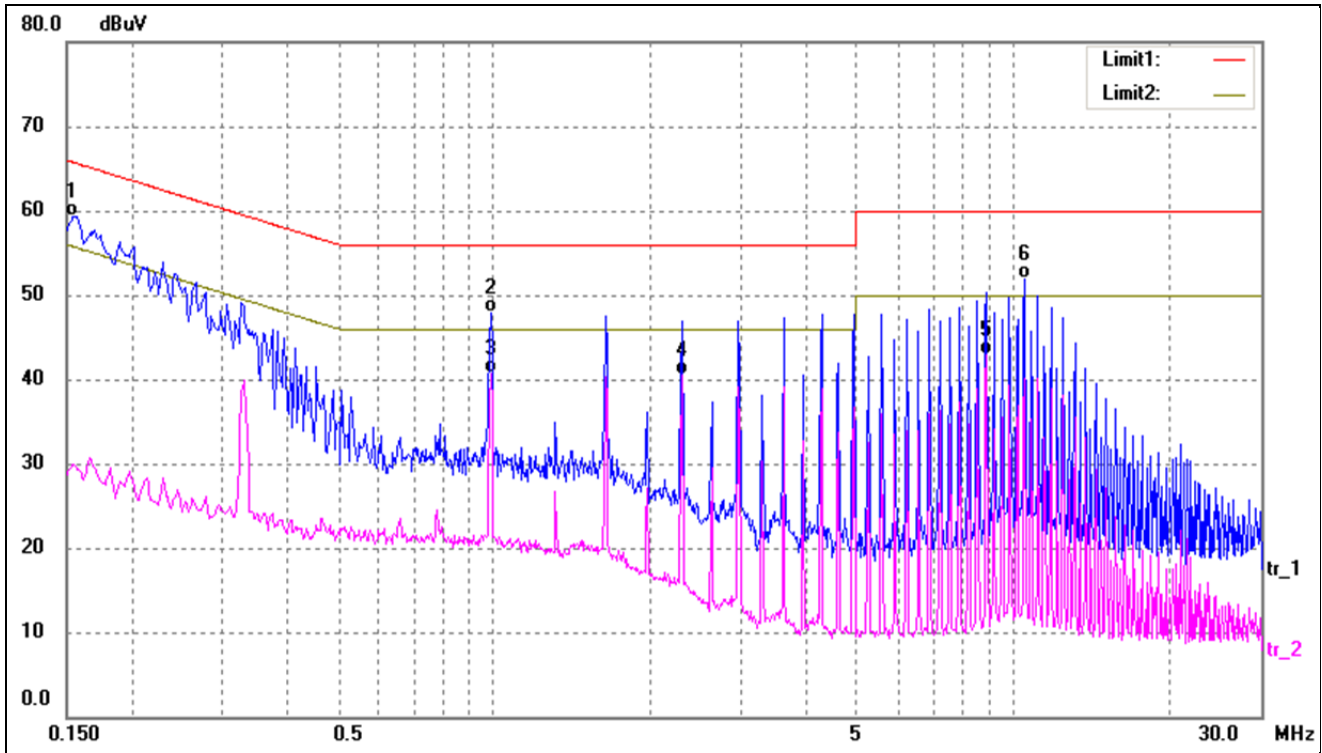

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1540	49.17	10.10	59.27	65.78	-6.51	QP
2	0.9860	37.34	10.50	47.84	56.00	-8.16	QP
3*	0.9860	30.18	10.50	40.68	46.00	-5.32	AVG
4	2.3020	29.93	10.63	40.56	46.00	-5.44	AVG
5	8.8700	31.95	10.91	42.86	50.00	-7.14	AVG
6	10.5100	40.96	10.96	51.92	60.00	-8.08	QP

Test Mode	Communication	AC120V 60Hz	Polarity:	Line
-----------	---------------	-------------	-----------	------

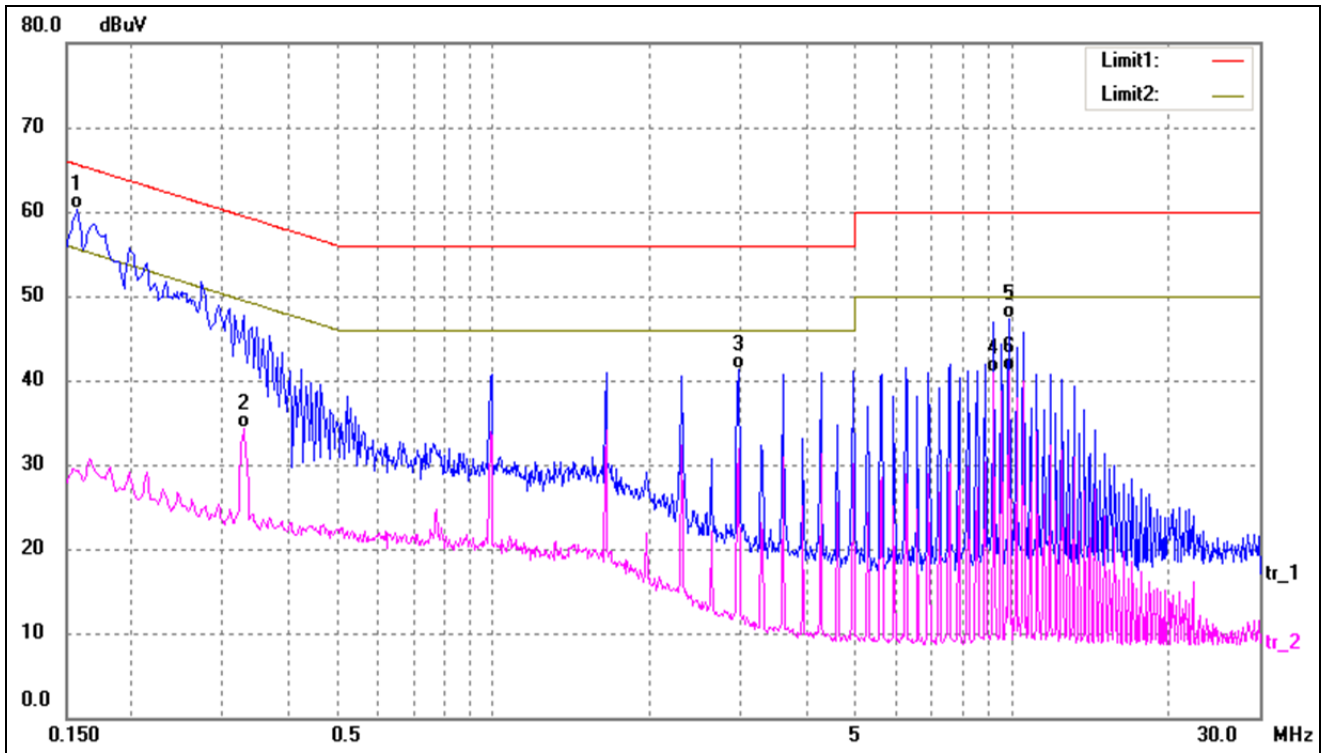

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1*	0.1580	50.23	10.10	60.33	65.57	-5.24	QP
2	0.3300	24.11	10.21	34.32	49.45	-15.13	AVG
3	2.9620	30.72	10.68	41.40	56.00	-14.60	QP
4	9.2100	30.00	10.92	40.92	50.00	-9.08	AVG
5	9.8700	36.26	10.95	47.21	60.00	-12.79	QP
6	9.8700	30.07	10.95	41.02	50.00	-8.98	AVG

## **APPENDIX PHOTOGRAPHS**

---

**Please refer to “ANNEX”**

**\*\*\*\*\* END OF REPORT \*\*\*\*\***