

FCC Test Report

Report No.: HQ200310EL07-FR**Applicant Name:** New Audio LLC**Applicant Address:** 132 W. 31st 7th Floor New York, NY 10001**FCC ID:** 2AGA7MW01**Product Name:** Wireless Bluetooth Adapter/Transmitter**Brand Name:** Master & Dynamic**Test Model:** MW01**Series Model:** N/A**Test Date:** Mar. 16, 2020 ~ May 13, 2020**Issued Date:** May 28, 2020**Issued By:** Hwa-Hsing (Dongguan) Testing Co., Ltd.**Lab Address:** No.101, Bld N1, Yuyuan 2Rd, Yuyuan Industrial Park, HuangJiang Town, Dongguan, China**Test Location:** No.101, Bld N1, Yuyuan 2Rd, Yuyuan Industrial Park, HuangJiang Town, Dongguan, China**FCC Registration:** 915896**Standards:** 47 CFR FCC Part 15, Subpart C (Section 15.247)
ANSI C63.10:2013

The above equipment has been tested by **Hwa-Hsing (Dongguan) Testing Co., Ltd.**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

Prepared by : Tank, **Date:** May 28, 2020
Tank Tan//Engineer

Approved by : Harry Li, **Date:** May 28, 2020
Harry Li/ Supervisor

This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification. The report must not be used by the client to claim product certification, approval, or endorsement by A2LA or any agency of the federal government. The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any government agencies.

Table of Contents

Release Control Record	4
1 Summary of Test Results.....	5
1.1 Measurement Uncertainty.....	5
1.2 Modification Record	5
2 General Information	6
2.1 General Description of EUT	6
2.2 Description of Test Modes.....	7
2.2.1 Test Mode Applicability and Tested Channel Detail.....	8
2.3 Description of Support Units	10
2.3.1 Configuration of System under Test	10
2.4 General Description of Applied Standards.....	11
3 Test Types and Results	12
3.1 Conducted Emission Measurement.....	12
3.1.1 Limits of Conducted Emission Measurement	12
3.1.2 Test Instruments	12
3.1.3 Test Procedure	12
3.1.4 Deviation from test standard.....	12
3.1.5 Test Setup.....	13
3.1.6 EUT operating conditions	13
3.1.7 Test Results	14
3.2 Radiated Emission and Bandedge Measurement	16
3.2.1 Limits of Radiated Emission and Bandedge Measurement	16
3.2.2 Test Instruments	17
3.2.3 Test Procedures.....	18
3.2.4 Deviation from Test Standard	18
3.2.5 Test Setup.....	19
3.2.6 EUT Operating Conditions.....	20
3.2.7 Test Results	21
3.3 Number of Hopping Frequency Used	29
3.3.1 Limits of Hopping Frequency Used Measurement	29
3.3.2 Test Setup.....	29
3.3.3 Test Instruments	29
3.3.4 Test Procedure	29
3.3.5 Deviation from Test Standard	29
3.3.6 Test Results	30
3.4 Dwell Time on Each Channel.....	31
3.4.1 Limits of Dwell Time on Each Channel Measurement.....	31
3.4.2 Test Setup.....	31
3.4.3 Test Instruments	31
3.4.4 Test Procedures.....	31
3.4.5 Deviation from Test Standard	31
3.4.6 Test Results	32
3.5 Channel Bandwidth.....	34
3.5.1 Limits of Channel Bandwidth Measurement.....	34
3.5.2 Test Setup.....	34
3.5.3 Test Instruments	34
3.5.4 Test Procedure	34
3.5.5 Deviation from Test Standard	34
3.5.6 EUT Operating Condition	34
3.5.7 Test Results	35
3.6 Occupied Bandwidth Measurement.....	36
3.6.1 Test Setup.....	36
3.6.2 Test Instruments	36

3.6.3	Test Procedure	36
3.6.4	Deviation from Test Standard	36
3.6.5	EUT Operating Conditions.....	36
3.6.6	Test Results	37
3.7	Hopping Channel Separation.....	38
3.7.1	Limits of Hopping Channel Separation Measurement.....	38
3.7.2	Test Setup.....	38
3.7.3	Test Instruments	38
3.7.4	Test Procedure	38
3.7.5	Deviation from Test Standard	38
3.7.6	Test Results	39
3.8	Maximum Output Power	40
3.8.1	Limits of Maximum Output Power Measurement	40
3.8.2	Test Setup.....	40
3.8.3	Test Instruments	40
3.8.4	Test Procedure	40
3.8.5	Deviation from Test Standard	40
3.8.6	EUT Operating Condition	40
3.8.7	Test Results	41
3.9	Conducted Out of Band Emission Measurement	41
3.9.1	Limits Of Conducted Out Of Band Emission Measurement	42
3.9.2	Test Instruments	42
3.9.3	Test Procedure	42
3.9.4	Deviation from Test Standard	42
3.9.5	EUT Operating Condition	42
3.9.6	Test Results	43
4	Pictures of Test Arrangements.....	47
4.1.2	Test Instruments.....	47
Appendix – Information on the Testing Laboratories		48

Release Control Record

Issue No.	Description	Date Issued
HQ200310EL07-FR	Original Release	May 28, 2020

1 Summary of Test Results

47 CFR FCC Part 15, Subpart C (Section 15.247)			
ANSI C63.10:2013; KDB 558074 D01 15.247 Meas Guidance v05r02			
FCC Clause	Test Item	Result	Remarks
15.207	AC Power Conducted Emission	Pass	Meet the requirement of limit.
15.247(a)(1) (iii)	Number of Hopping Frequency Used	Pass	Meet the requirement of limit.
15.247(a)(1) (iii)	Dwell Time on Each Channel	Pass	Meet the requirement of limit.
15.247(a)(1)	1. Hopping Channel Separation 2. Spectrum Bandwidth of a Frequency Hopping Sequence Spread Spectrum System	Pass	Meet the requirement of limit.
15.247(b)	Maximum Peak Output Power	Pass	Meet the requirement of limit.
---	Occupied Bandwidth Measurement	Pass	Reference only
15.205 & 209	Radiated Emissions	Pass	Meet the requirement of limit.
15.247(d)	Band Edge Measurement	Pass	Meet the requirement of limit.
15.247(d)	Antenna Port Emission	Pass	Meet the requirement of limit.
15.203	Antenna Requirement	Pass	No antenna connector is used.

Note: If The Frequency Hopping System operating in 2400-2483.5 MHz band and the output power less than 125mW. The hopping channel carrier frequencies separated by a minimum of 25 kHz or two-thirds of the 20 dB bandwidth of hopping channel whichever is greater.

1.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

The listed uncertainties are the worst case uncertainty for the entire range of measurement. Please note that the uncertainty values are provided for informational purposes only and are not used in determining the PASS/FAIL results.

Measurement	Frequency	Expanded Uncertainty (k=2) (±)
Conducted Emissions at mains ports	150 kHz ~ 30 MHz	2.66 dB
Radiated Emissions up to 1 GHz	9KHz ~ 30MHz	2.90dB
	30 MHz ~ 1000 MHz	3.47 dB
Radiated Emissions above 1 GHz	1 GHz ~ 18 GHz	4.84 dB
	18 GHz ~ 40 GHz	4.62 dB

Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k = 2.

1.2 Modification Record

There were no modifications required for compliance.

2 General Information

2.1 General Description of EUT

Product Name	Wireless Bluetooth Adapter/Transmitter
Brand Name	Master & Dynamic
Test Model Name	MW01
Identification No. of EUT	N/A
Series Model Name	N/A
Model Difference	N/A
Status of EUT	Engineering prototype
Power Supply Rating	DC 3.7V from Battery DC 5V From USB type C Port
Modulation Type	GFSK, $\pi/4$ DQPSK, 8DPSK
Transfer Rate	1Mbps/2Mbps/3Mbps
Operating Frequency	2402 ~ 2480 MHz
Number of Channel	79
Output Power	1.007mW (Max. Measured)
Antenna Type	PCB Antenna, 3.3dBi Gain
Antenna Connector	N/A
Accessory Device	N/A
Data Cable Supplied	N/A

Note:

1. Please refer to the EUT photo document (Reference No.: HQ200310EL07) for detailed product photo.
2. The above EUT information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or User's Manual.

2.2 Description of Test Modes

79 channels are provided to this EUT:

Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)
0	2402	20	2422	40	2442	60	2462
1	2403	21	2423	41	2443	61	2463
2	2404	22	2424	42	2444	62	2464
3	2405	23	2425	43	2445	63	2465
4	2406	24	2426	44	2446	64	2466
5	2407	25	2427	45	2447	65	2467
6	2408	26	2428	46	2448	66	2468
7	2409	27	2429	47	2449	67	2469
8	2410	28	2430	48	2450	68	2470
9	2411	29	2431	49	2451	69	2471
10	2412	30	2432	50	2452	70	2472
11	2413	31	2433	51	2453	71	2473
12	2414	32	2434	52	2454	72	2474
13	2415	33	2435	53	2455	73	2475
14	2416	34	2436	54	2456	74	2476
15	2417	35	2437	55	2457	75	2477
16	2418	36	2438	56	2458	76	2478
17	2419	37	2439	57	2459	77	2479
18	2420	38	2440	58	2460	78	2480
19	2421	39	2441	59	2461		

2.2.1 Test Mode Applicability and Tested Channel Detail

EUT Configure Mode	Applicable To				Description
	RE $\geq$ 1G	RE<1G	PLC	APCM	
-	√	√	√	√	-

Where **RE $\geq$ 1G**: Radiated Emission above 1 GHz

RE<1G: Radiated Emission below 1 GHz

PLC: Power Line Conducted Emission

APCM: Antenna Port Conducted Measurement

Note:

1. For Radiated emission test, pre-tested GFSK, $\pi/4$ -DQPSK modulation type and found GFSK was the worse, therefore chosen for the final test and presented in the test report.
2. The EUT had been pre-tested on the positioned of each 3 axis. The worst case was found when positioned on **X-plane**.
3. "-" means no effect.

Radiated Emission Test (Above 1 GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Packet Type
-	0 to 78	0, 39, 78	FHSS	GFSK	DH5
-	0 to 78	0, 39, 78	FHSS	8DPSK	3DH5

Radiated Emission Test (Below 1 GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Packet Type
-	0 to 78	78	FHSS	GFSK	DH5

Power Line Conducted Emission Test:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Packet Type
-	0 to 78	78	FHSS	GFSK	DH5

Antenna Port Conducted Measurement:

- ☒ This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Packet Type
-	0 to 78	0, 39, 78	FHSS	GFSK	DH5
-	0 to 78	0, 39, 78	FHSS	8DPSK	3DH5

Test Condition:

Applicable To	Environmental Conditions	Input Power	Tested by
RE $\geq$ 1G	25 deg. C, 65 % RH	DC3.7V battey	Tank Tan
RE<1G	25 deg. C, 65 % RH	DC3.7V battey	Tank Tan
PLC	25 deg. C, 65 % RH	DC3.7V battey	Tank Tan
APCM	25 deg. C, 65 % RH	DC3.7V battey	Harry Li

2.3 Description of Support Units


The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

No.	Product	Brand	Model No.	Serial No.	FCC ID
1.	Notebook	Lenovo	E430	MP-0DN27	N/A
2.	Adapter	Sony	XLED-50US-583	N/A	N/A
3.	Mobile Phone	APPLE	7S	N/A	N/A
4.	Bluetooth headphone	Lenovo	KTSL3304	N/A	N/A


No.	Signal Cable Description Of The Above Support Units
1.	USB Line: Un-shieldin 1.2m
2.	USB Line: Un-shieldin 1.2m
3.	/

2.3.1 Configuration of System under Test

Configuration: Charging 1: Conducted Emission for AC port

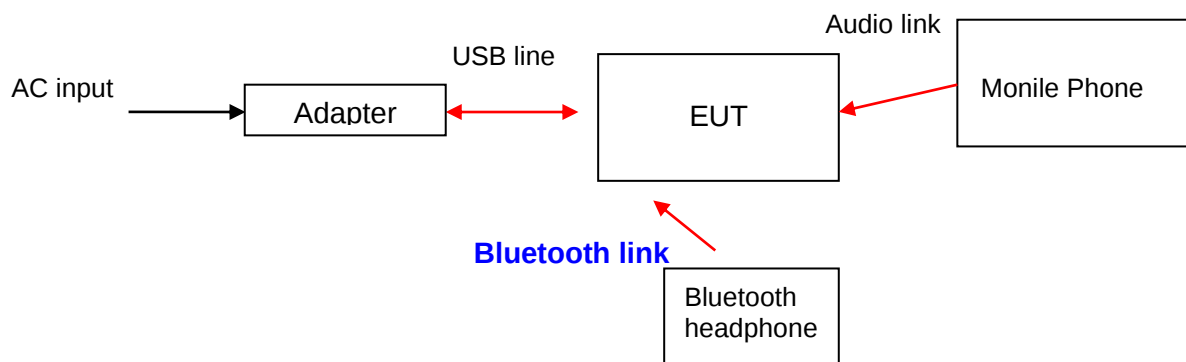

Configuration: Charging: Radiated Emission

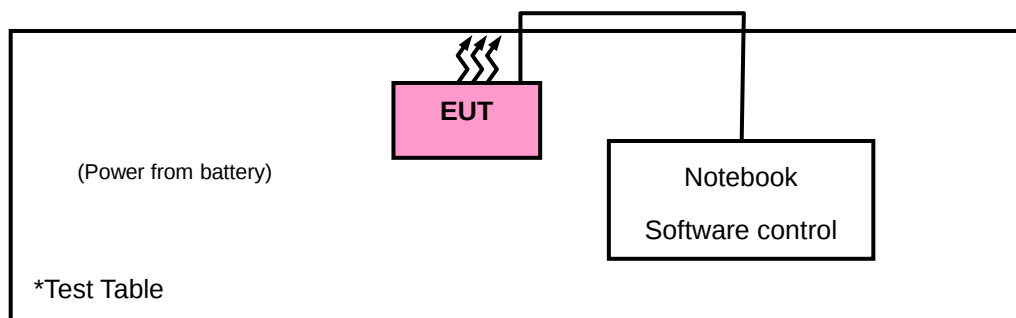

2.4 General Description of Applied Standards

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart C (15.247)

FCC Public Notice DA 00-705

ANSI C63.10-2013

KDB 558074 D01 15.247 Meas Guidance v05r02

All test items have been performed and recorded as per the above standards.

Note: The EUT has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (sDoC).
The test report has been issued separately.

3 Test Types and Results

3.1 Conducted Emission Measurement

3.1.1 Limits of Conducted Emission Measurement

Frequency of emission (MHz)	Conducted limit (dBμV)	
	Quasi-peak	Average
0.15 ~ 0.5	66 to 56	56 to 46
0.5 ~ 5	56	46
5 ~ 30	60	50

NOTE: 1. The lower limit shall apply at the transition frequencies.

2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

3.1.2 Test Instruments

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
EMI Test Receiver	Rohde&Schwarz	ESCI3	101418	2019-9-18	2020-9-17
Artificial Mains Network	Rohde&Schwarz	ENV216	3560.6550.15	2019-10-18	2020-10-17
Test software	FARAD	EZ_EMC V1.1.4.2	N/A	N/A	N/A

NOTES: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.

2. The test was performed in shielding room 553.

3.1.3 Test Procedure


- The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

NOTE: All modes of operation were investigated and the worst-case emissions are reported.

3.1.4 Deviation from test standard

No deviation.

3.1.5 Test Setup

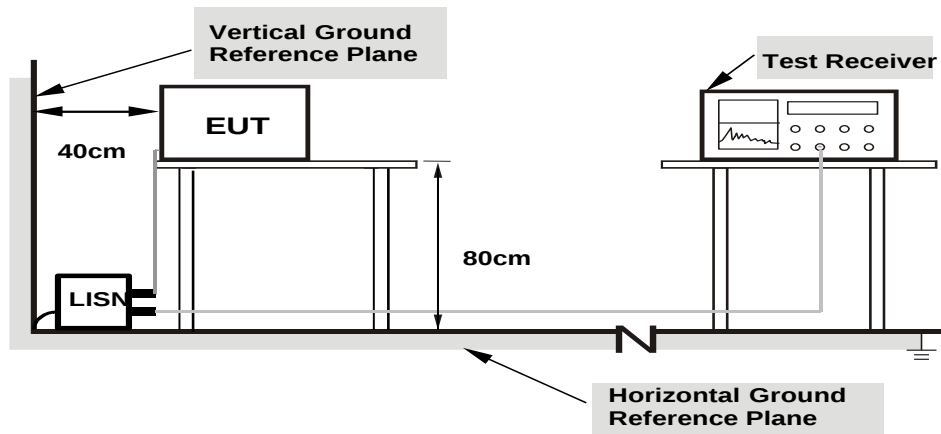

Note: 1.Support units were connected to second LISN.
 2.Both of LISNs (AMN) are 80cm from EUT and at least 80cm from other units and other metal planes support units.

3.1.6 EUT operating conditions

- a. Turned on the power of all equipment.
- b. EUT was operated according to the type description in manufacturer's specifications or the User's Manual.


3.1.7 Test Results

Conducted worst-case data:

Phase		Line		6dB bandwidth		9kHz	
No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	dB	(dBuV)	(dBuV)	(dB)	
1	0.1623	32.53	9.81	42.34	65.35	-23.01	QP
2	0.1623	4.63	9.81	14.44	55.35	-40.91	AVG
3	0.1831	30.58	9.78	40.36	64.34	-23.98	QP
4	0.1831	3.70	9.78	13.48	54.34	-40.86	AVG
5	0.2362	24.27	9.76	34.03	62.23	-28.20	QP
6	0.2362	0.48	9.76	10.24	52.23	-41.99	AVG
7	0.3092	19.42	9.77	29.19	59.99	-30.80	QP
8	0.3092	1.20	9.77	10.97	49.99	-39.02	AVG
9	0.4455	17.57	9.76	27.33	56.96	-29.63	QP
10	0.4455	2.67	9.76	12.43	46.96	-34.53	AVG
11	0.9900	9.51	9.64	19.15	56.00	-36.85	QP
12	0.9900	-0.77	9.64	8.87	46.00	-37.13	AVG

REMARKS: The emission levels of other frequencies were very low against the limit.

80.0 dBuV

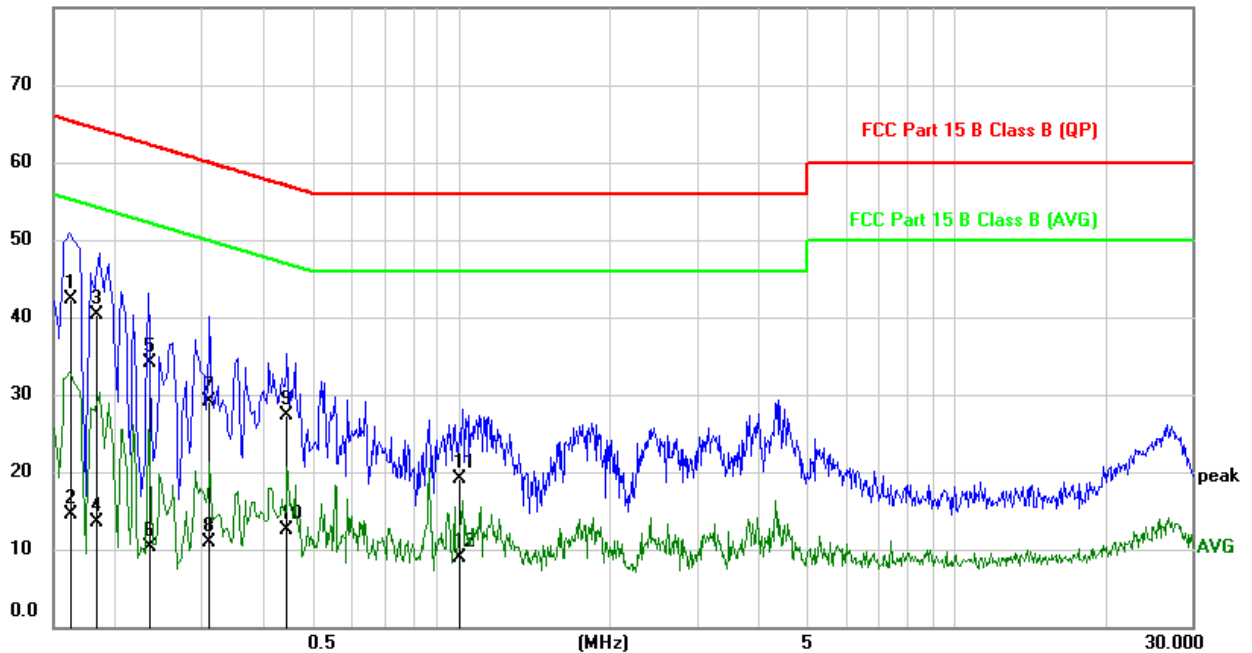


CONDUCTED WORST-CASE DATA:

Phase	Neutral	6dB bandwidth	9kHz
-------	---------	---------------	------

No.	Frequency (MHz)	Reading (dBuV)	Correct dB	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1720	31.31	9.80	41.11	64.86	-23.75	QP
2	0.1720	4.03	9.80	13.83	54.86	-41.03	AVG
3	0.1836	31.00	9.78	40.78	64.32	-23.54	QP
4	0.1836	4.02	9.78	13.80	54.32	-40.52	AVG
5	0.2172	27.59	9.76	37.35	62.93	-25.58	QP
6	0.2172	3.04	9.76	12.80	52.93	-40.13	AVG
7	0.3285	19.44	9.77	29.21	59.49	-30.28	QP
8	0.3285	1.41	9.77	11.18	49.49	-38.31	AVG
9	0.4136	16.05	9.75	25.80	57.58	-31.78	QP
10	0.4136	1.22	9.75	10.97	47.58	-36.61	AVG
11	4.3357	11.03	9.52	20.55	56.00	-35.45	QP
12	4.3357	-2.26	9.52	7.26	46.00	-38.74	AVG

REMARKS: The emission levels of other frequencies were very low against the limit.

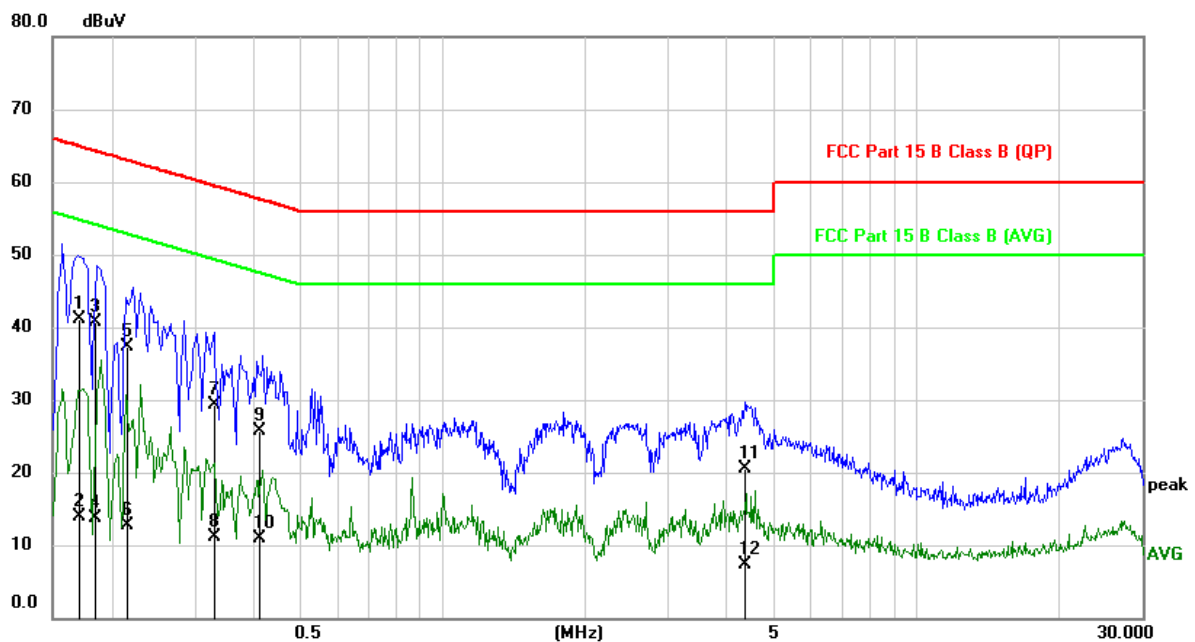

3.2 Radiated Emission and Bandedge Measurement

3.2.1 Limits of Radiated Emission and Bandedge Measurement

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 20 dB below the highest level of the desired power:

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F (kHz)	300
0.490 ~ 1.705	24000/F (kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

Note:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000 MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20 dB under any condition of modulation.

3.2.2 Test Instruments

Description & Manufacturer	Model No.	Serial No.	Date of Calibration	Due Date of Calibration
EMI Test Receiver Rohde&Schwarz	ESCI 7	100962	2019-7-16	2020-7-15
Broadband antenna Schwarzbeck	VULB 9168	00937	2019-10-18	2020-10-17
3m Semi-anechoic Chamber MAORUI	9m*6m*6m	NSEMC003	2020-04-15	2021-04-14
Signal Amplifier Com-power	PAM-103	18020051	2019-10-18	2020-10-17
Attenuator Rohde&Schwarz	TS2GA-6dB	18101101	N/A	N/A
Test software FARAD	FARAD	EZ_EMCV1.1.4.2	N/A	N/A
Fixed Attenuator Mini-Circuits	MDCS18N-10	MDCS18N-10-01	2019-10-18	2020-10-17
Loop Antenna	HLA 6121	45745	2019-10-18	2020-10-17
Preamplifier EMCI	EMC001340	980201	2019-10-18	2020-10-17
Horn Antenna Schwarzbeck	BBHA 9170	01959	2019-10-18	2020-10-17
Spectrum Analyzer Rohde&Schwarz	FSV-40N	101783	2019-10-18	2020-10-17
Broadband Coaxial Preamplifier Schwarzbeck	BBV 9718	00025	2019-10-18	2020-10-17

Note:

1. The test was performed in 966 Chamber.
2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.

3.2.3 Test Procedures

- a. The EUT was placed on the top of a rotating table 0.8 meters (for below 1 GHz) / 1.5 meters (for above 1 GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detected function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

Note:


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz & 360 kHz for Quasi-peak detection (QP) at frequency below 1 GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1 GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 1/T for Average (Duty cycle < 98 %) detection at frequency above 1 GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 10 Hz (Duty cycle ≥ 98 %) for Average detection (AV) at frequency above 1 GHz.
5. Test procedures for measuring FHSS device: The use of a duty cycle correction factor (DCCF) is permitted for calculating average radiated field strength emission levels for an FHSS device in 15.247. This DCCF can be applied when the unwanted emission limit is subject to an average field strength limit (e.g., within a Government Restricted band) and the conditions specified in Section 15.35(c) can be satisfied. The average radiated field strength is calculated by subtracting the DCCF from the maximum radiated field strength level as determined through measurement. The maximum radiated field strength level represents the worst-case (maximum amplitude) RMS measurement of the emission(s) during continuous transmission (i.e., not including any time intervals during which the transmitter is off or is transmitting at a reduced power level). It is also acceptable to apply the DCCF to a measurement performed with a peak detector instead of the specified RMS power averaging detector. Note that Section 15.35(c) specifies that the DCCF shall represent the worst-case (greatest duty cycle) over any 100 msec transmission period. Subclause 7.5 of ANSI C63.10 provides additional measurement guidance applicable to determination of the DCCF.
6. All modes of operation were investigated and the worst-case emissions are reported.

3.2.4 Deviation from Test Standard


No deviation.

3.2.5 Test Setup


Radiated emission below 30 MHz:

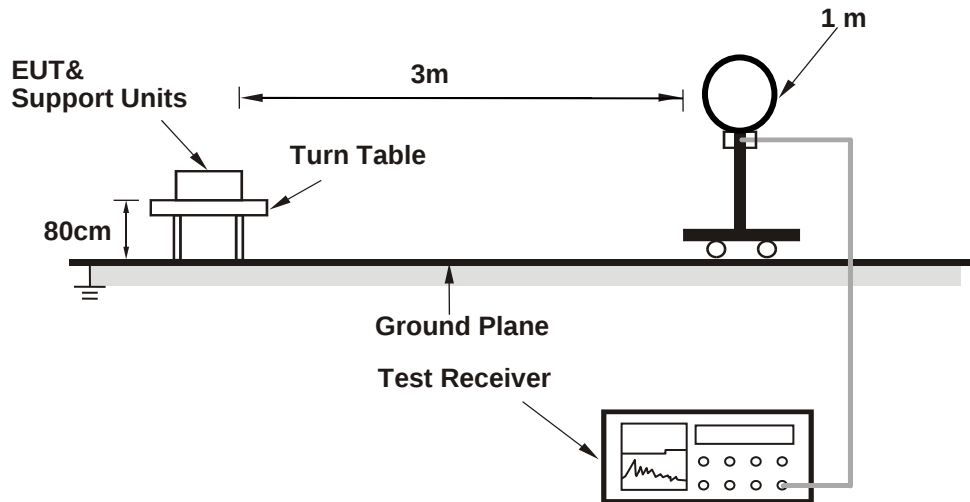

Frequency Range below 1 GHz:

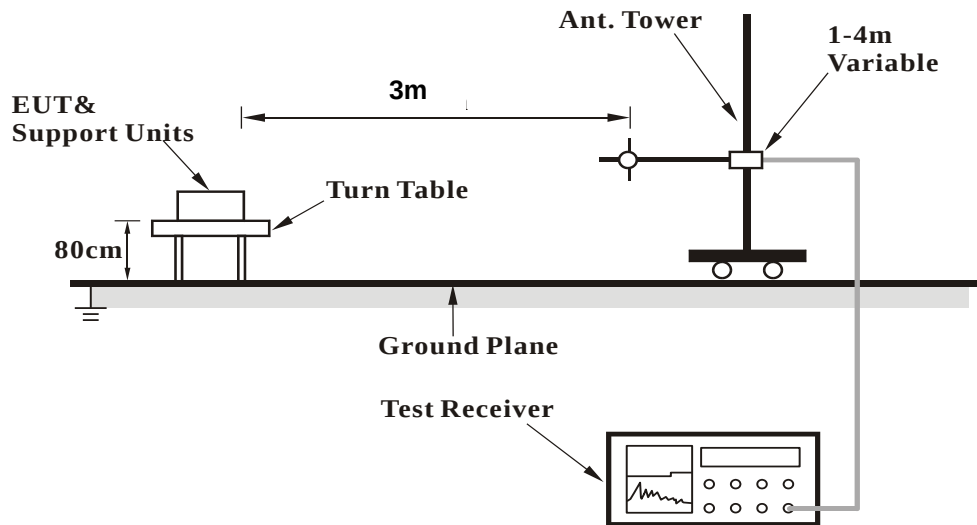

Frequency Range above 1 GHz:

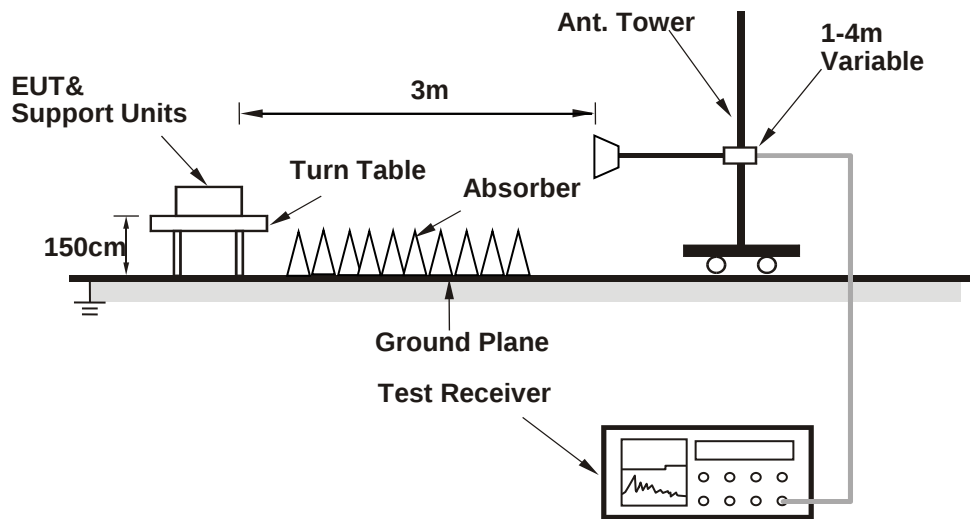

Directional antenna.

For the actual test configuration, please refer to the attached file (Test Setup Photo).

3.2.6 EUT Operating Conditions

Set the EUT under transmission condition continuously at specific channel frequency.

3.2.7 Test Results

Above 1 GHz Data: GFSK

EUT Test Condition		Measurement Detail	
Channel	Channel 0	Frequency Range	1 GHz ~ 25 GHz
Input Power	DC 3.7V battery	Detector Function	Peak (PK) Average (AV)
Environmental Conditions	25 deg. C, 65 % RH	Tested By	Tank Tan

Antenna Polarity & Test Distance: Horizontal at 3 m										
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (cm)	Table Angle (Degree)	Reading (dBuV)	Factor (dB)	Detector	Remark
1	2390.00	38.24	74.00	-35.76	163	265	39.44	-1.20	peak	
2	2390.00	8.14	54.00	-45.86	163	265	9.34	-1.20	AVG	
3	*2402.00	95.22			163	265	96.40	-1.18	peak	C.F.
4	*2402.00	65.12			163	265	66.30	-1.18	AVG	C.F.
5	4804.00	57.64	74.00	-16.36	100	141	52.96	4.68	peak	
6	4804.00	27.54	54.00	-26.46	100	141	22.86	4.68	AVG	
7	#7206.00	59.31	74.00	-14.69	100	236	48.51	10.80	peak	
8	#7206.00	29.21	54.00	-24.79	100	236	18.41	10.80	AVG	
Antenna Polarity & Test Distance: Vertical at 3 m										
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (cm)	Table Angle (Degree)	Reading (dBuV)	Factor (dB)	Detector	Remark
1	2390.00	35.64	74.00	-38.36	100	123	36.84	-1.20	peak	
2	2390.00	5.54	54.00	-48.46	100	123	6.74	-1.20	AVG	
3	*2402.00	93.37			100	123	94.55	-1.18	peak	C.F.
4	*2402.00	63.27			100	123	64.45	-1.18	AVG	C.F.
5	4804.00	56.21	74.00	-17.79	100	229	51.53	4.68	peak	
6	4804.00	26.11	54.00	-27.89	100	229	21.43	4.68	AVG	
7	#7206.00	58.36	74.00	-15.64	100	175	47.56	10.80	peak	
8	#7206.00	28.26	54.00	-25.74	100	175	17.46	10.80	AVG	

Remarks:

- Emission Level = Read Level + Factor (Antenna Factor + Cable Loss - Preamp Factor)
Margin value = Emission level – Limit value
- 2402 MHz: Fundamental frequency.

EUT Test Condition		Measurement Detail	
Channel	Channel 39	Frequency Range	1 GHz ~ 25 GHz
Input Power	DC 3.7V battery	Detector Function	Peak (PK) Average (AV)
Environmental Conditions	25 deg. C, 65 % RH	Tested By	Tank Tan

Antenna Polarity & Test Distance: Horizontal at 3 m										
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (cm)	Table Angle (Degree)	Reading (dBuV)	Factor (dB)	Detector	Remark
1	*2441.00	97.59 PK			226	263	98.66	-1.07	peak	C.F.
2	*2441.00	67.49 AV			226	263	68.56	-1.07	AVG	C.F.
3	4880.00	57.42 PK	74.00	-16.58	100	220	51.87	5.55	peak	
4	4880.00	27.32 AV	54.00	-26.68	100	220	21.77	5.55	AVG	
5	7320.00	59.87 PK	74.00	-14.13	100	197	48.70	11.17	peak	
6	7320.00	29.77 AV	54.00	-24.23	100	197	18.60	11.17	AVG	
Antenna Polarity & Test Distance: Vertical at 3 m										
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (cm)	Table Angle (Degree)	Reading (dBuV)	Factor (dB)	Detector	Remark
1	*2441.00	92.64			100	112	93.71	-1.07	peak	C.F.
2	*2441.00	62.54			100	112	63.61	-1.07	AVG	C.F.
3	4880.00	55.21	74.00	-18.79	100	156	49.66	5.55	peak	
4	4880.00	25.11	54.00	-28.89	100	156	19.56	5.55	AVG	
5	7320.00	58.33	74.00	-15.67	108	257	47.16	11.17	peak	
6	7320.00	28.23	54.00	-25.77	108	257	17.06	11.17	AVG	

Remarks:

- Emission Level = Read Level + Factor (Antenna Factor + Cable Loss - Preamp Factor)
Margin value = Emission level – Limit value
- 2441 MHz: Fundamental frequency.

EUT Test Condition		Measurement Detail	
Channel	Channel 78	Frequency Range	1 GHz ~ 25 GHz
Input Power	DC 3.7V battery	Detector Function	Peak (PK) Average (AV)
Environmental Conditions	25 deg. C, 65 % RH	Tested By	Tank Tan

Antenna Polarity & Test Distance: Horizontal at 3 m										
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (cm)	Table Angle (Degree)	Reading (dBuV)	Factor (dB)	Detector	Remark
1	*2480.00	98.46			199	258	99.42	-0.96	peak	C.F.
2	*2480.00	68.36			199	258	69.32	-0.96	AVG	C.F.
3	2483.50	57.23	74.00	-16.77	199	258	58.18	-0.95	peak	
4	2483.50	27.13	54.00	-26.87	199	258	28.08	-0.95	AVG	
5	4960.00	57.52	74.00	-16.48	100	205	52.13	5.39	peak	
6	4960.00	27.42	54.00	-26.58	100	205	22.03	5.39	AVG	
7	7440.00	60.21	74.00	-13.79	100	173	48.65	11.56	peak	
8	7440.00	30.11	54.00	-23.89	100	173	18.55	11.56	AVG	
Antenna Polarity & Test Distance: Vertical at 3 m										
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (cm)	Table Angle (Degree)	Reading (dBuV)	Factor (dB)	Detector	Remark
1	*2480.00	94.16			100	117	95.12	-0.96	peak	C.F.
2	*2480.00	64.06			100	117	65.02	-0.96	AVG	C.F.
3	2483.50	52.49	74.00	-21.51	100	117	53.44	-0.95	peak	
4	2483.50	22.39	54.00	-31.61	100	117	23.34	-0.95	AVG	
5	4960.00	54.78	74.00	-19.22	100	299	49.39	5.39	peak	
6	4960.00	24.68	54.00	-29.32	100	299	19.29	5.39	AVG	
7	7440.00	58.10	74.00	-15.90	100	272	46.54	11.56	peak	
8	7440.00	28.00	54.00	-26.00	100	272	16.44	11.56	AVG	

Remarks:

- Emission Level = Read Level + Factor (Antenna Factor + Cable Loss - Preamp Factor)
Margin value = Emission level – Limit value
- 2480 MHz: Fundamental frequency.

8DPSK

EUT Test Condition		Measurement Detail	
Channel	Channel 0	Frequency Range	1 GHz ~ 25 GHz
Input Power	DC 3.7V battery	Detector Function	Peak (PK) Average (AV)
Environmental Conditions	25 deg. C, 65 % RH	Tested By	Tank Tan

Antenna Polarity & Test Distance: Horizontal at 3 m										
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (cm)	Table Angle (Degree)	Reading (dBuV)	Factor (dB)	Detector	Remark
1	2390.00	36.28	74.00	-37.72	186	262	37.48	-1.20	peak	
2	2390.00	6.18	54.00	-47.82	186	262	7.38	-1.20	AVG	
3	*2402.00	97.63			186	262	98.81	-1.18	peak	C.F.
4	*2402.00	67.53			186	262	68.71	-1.18	AVG	C.F.
5	4804.00	57.41	74.00	-16.59	100	145	52.73	4.68	peak	
6	4804.00	27.31	54.00	-26.69	100	145	22.63	4.68	AVG	
7	#7206.00	59.64	74.00	-14.36	100	212	48.84	10.80	peak	
8	#7206.00	29.54	54.00	-24.46	100	212	18.74	10.80	AVG	
Antenna Polarity & Test Distance: Vertical at 3 m										
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (cm)	Table Angle (Degree)	Reading (dBuV)	Factor (dB)	Detector	Remark
1	2390.00	35.87	74.00	-38.13	100	130	37.07	-1.20	peak	
2	2390.00	5.77	54.00	-48.23	100	130	6.97	-1.20	AVG	
3	*2402.00	93.08			100	130	94.26	-1.18	peak	C.F.
4	*2402.00	62.98			100	130	64.16	-1.18	AVG	C.F.
5	4804.00	56.44	74.00	-17.56	100	175	51.76	4.68	peak	
6	4804.00	26.34	54.00	-27.66	100	175	21.66	4.68	AVG	
7	#7206.00	59.72	74.00	-14.28	100	231	48.92	10.80	peak	
8	#7206.00	29.62	54.00	-24.38	100	231	18.82	10.80	AVG	

Remarks:

3. Emission Level = Read Level + Factor (Antenna Factor + Cable Loss - Preamplifier Factor)

Margin value = Emission level – Limit value

4. C.F.: Fundamental frequency.

EUT Test Condition		Measurement Detail	
Channel	Channel 39	Frequency Range	1 GHz ~ 25 GHz
Input Power	DC 3.7V battery	Detector Function	Peak (PK) Average (AV)
Environmental Conditions	25 deg. C, 65 % RH	Tested By	Tank Tan

Antenna Polarity & Test Distance: Horizontal at 3 m										
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (cm)	Table Angle (Degree)	Reading (dBuV)	Factor (dB)	Detector	Remark
1	*2441.00	96.89			136	275	97.96	-1.07	peak	C.F.
2	*2441.00	66.79			136	275	67.86	-1.07	AVG	C.F.
3	4880.00	56.21	74.00	-17.79	100	251	50.66	5.55	peak	
4	4880.00	26.11	54.00	-27.89	100	251	20.56	5.55	AVG	
5	7320.00	59.73	74.00	-14.27	100	187	48.56	11.17	peak	
6	7320.00	29.63	54.00	-24.37	100	187	18.46	11.17	AVG	
Antenna Polarity & Test Distance: Vertical at 3 m										
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Antenna Height (cm)	Table Angle (Degree)	Remark
1	*2441.00	93.42			100	126	94.49	-1.07	peak	C.F.
2	*2441.00	63.32			100	126	64.39	-1.07	AVG	C.F.
3	4880.00	55.14	74.00	-18.86	100	273	49.59	5.55	peak	
4	4880.00	25.04	54.00	-28.96	100	273	19.49	5.55	AVG	
5	7320.00	58.63	74.00	-15.37	100	165	47.46	11.17	peak	
6	7320.00	28.53	54.00	-25.47	100	165	17.36	11.17	AVG	

Remarks:

3. Emission Level = Read Level + Factor (Antenna Factor + Cable Loss - Preamp Factor)

Margin value = Emission level – Limit value

4. 2441 MHz: Fundamental frequency.

EUT Test Condition		Measurement Detail	
Channel	Channel 78	Frequency Range	1 GHz ~ 25 GHz
Input Power	DC 3.7V battery	Detector Function	Peak (PK) Average (AV)
Environmental Conditions	25 deg. C, 65 % RH	Tested By	Tank Tan

Antenna Polarity & Test Distance: Horizontal at 3 m										
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (cm)	Table Angle (Degree)	Reading (dBuV)	Factor (dB)	Detector	Remark
1	*2480.00	99.34			162	255	100.30	-0.96	peak	C.F.
2	*2480.00	69.24			162	255	70.20	-0.96	AVG	C.F.
3	2483.50	57.48	74.00	-16.52	162	255	58.43	-0.95	peak	
4	2483.50	27.38	54.00	-26.62	162	255	28.33	-0.95	AVG	
5	4960.00	58.63	74.00	-15.37	100	168	53.24	5.39	peak	
6	4960.00	28.53	54.00	-25.47	100	168	23.14	5.39	AVG	
7	7440.00	60.18	74.00	-13.82	103	224	48.62	11.56	peak	
8	7440.00	30.08	54.00	-23.92	103	224	18.52	11.56	AVG	
Antenna Polarity & Test Distance: Vertical at 3 m										
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (cm)	Table Angle (Degree)	Reading (dBuV)	Factor (dB)	Detector	Remark
1	*2480.00	94.23			100	141	95.19	-0.96	peak	C.F.
2	*2480.00	64.13			100	141	65.09	-0.96	AVG	C.F.
3	2483.50	53.29	74.00	-20.71	100	141	54.24	-0.95	peak	
4	2483.50	23.19	54.00	-30.81	100	141	24.14	-0.95	AVG	
5	4960.00	54.62	74.00	-19.38	100	298	49.23	5.39	peak	
6	4960.00	24.52	54.00	-29.48	100	298	19.13	5.39	AVG	
7	7440.00	58.71	74.00	-15.29	100	184	47.15	11.56	peak	
8	7440.00	28.61	54.00	-25.39	100	184	17.05	11.56	AVG	

Remarks:

3. Emission Level = Read Level +Factor (Antenna Factor + Cable Loss - Preamp Factor)

Margin value = Emission level – Limit value


4. 2480 MHz: Fundamental frequency.

9 kHz ~ 30 MHz Data:

The amplitude of spurious emissions attenuated more than 20 dB below the permissible value is not required to be report.

30 MHz ~ 1 GHz Worst-Case Data:

EUT Test Condition		Measurement Detail	
Channel	Channel 78	Frequency Range	30 MHz ~ 1 GHz
Input Power	DC 3.7V battery	Detector Function	Peak (PK) Quasi-peak (QP)
Environmental Conditions	25 deg. C, 65 % RH	Tested By	Tank tan

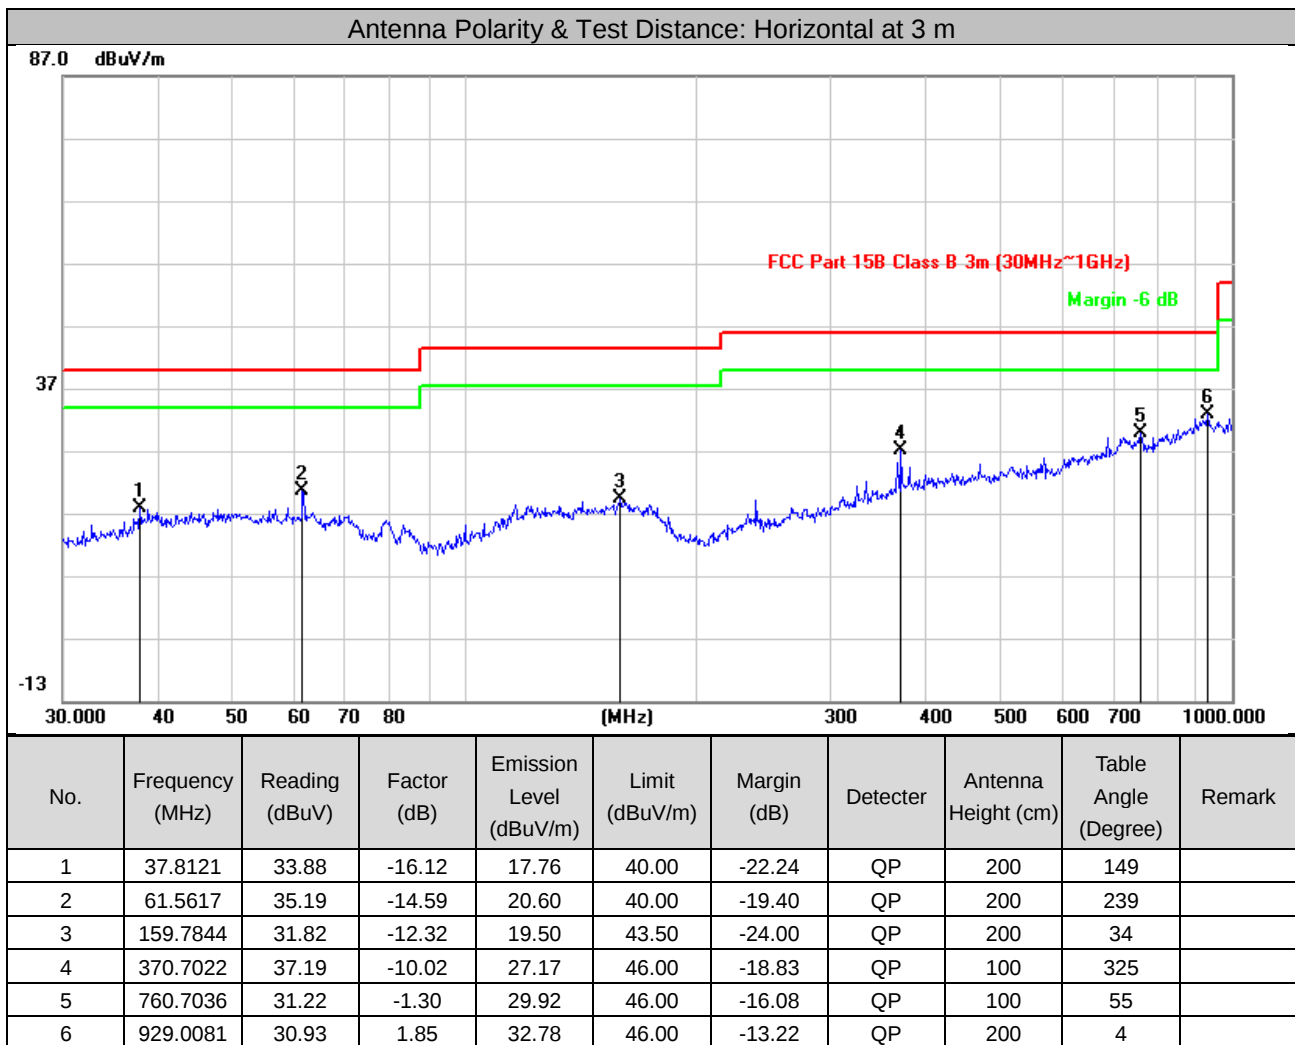


Remarks:

Emission Level = Read Level + Factor (Antenna Factor + Cable Loss - Preamp Factor)

Margin value = Emission level – Limit value

EUT Test Condition		Measurement Detail	
Channel	Channel 78	Frequency Range	30 MHz ~ 1 GHz
Input Power	DC 3.7V battery	Detector Function	Peak (PK) Quasi-peak (QP)
Environmental Conditions	25 deg. C, 65 % RH	Tested By	Tank tan

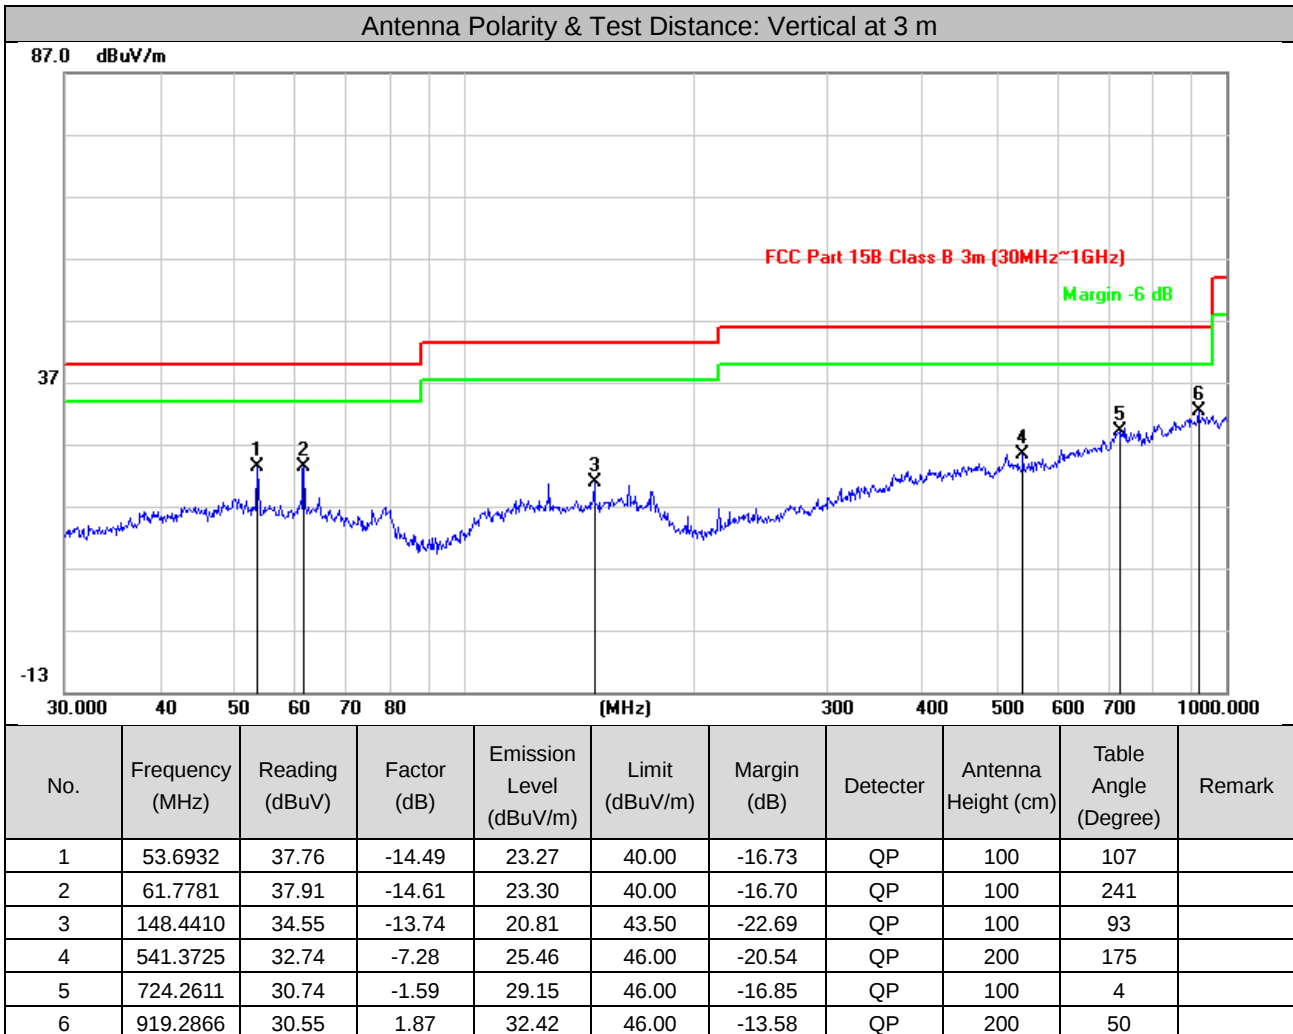

Remarks:

Emission Level = Read Level + Factor (Antenna Factor + Cable Loss - Preamp Factor)


Margin value = Emission level – Limit value

3.3 Number of Hopping Frequency Used

3.3.1 Limits of Hopping Frequency Used Measurement

At least 15 channels frequencies, and should be equally spaced.

3.3.2 Test Setup



3.3.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

3.3.4 Test Procedure

- Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
- Turn on the EUT and connect its antenna terminal to measurement via a low loss cable. Then set it to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.
- Set the SA on MaxHold Mode, and then keep the EUT in hopping mode. Record all the signals from each channel until each one has been recorded.
- Set the SA on View mode and then plot the result on SA screen.
- Repeat above procedures until all frequencies measured were complete.


3.3.5 Deviation from Test Standard

No deviation.


3.3.6 Test Results

There are 79 hopping frequencies in the hopping mode. Please refer to next page for the test result. On the plots, it shows that the hopping frequencies are equally spaced.

GFSK

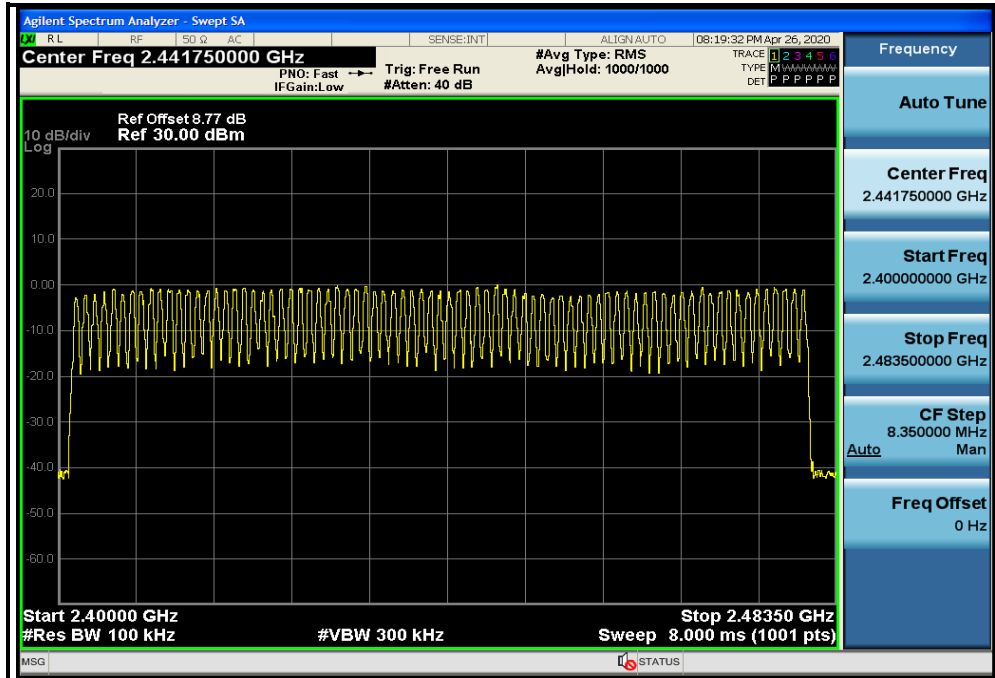

8DPSK

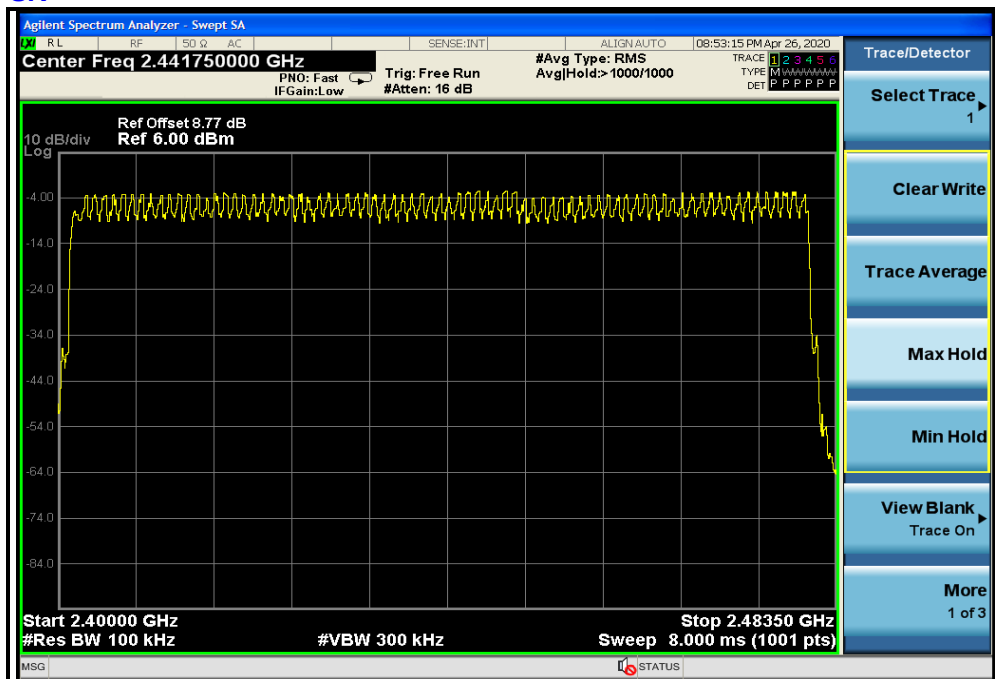


3.4 Dwell Time on Each Channel

3.4.1 Limits of Dwell Time on Each Channel Measurement

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

3.4.2 Test Setup



3.4.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

3.4.4 Test Procedures

- Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
- Turn on the EUT and connect its antenna terminal to measurement via a low loss cable. Then set it to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.
- Adjust the center frequency of SA on any frequency be measured and set SA to zero span mode. And then, set RBW and VBW of spectrum analyzer to proper value.
- Measure the time duration of one transmission on the measured frequency. And then plot the result with time difference of this time duration.
- Repeat above procedures until all different time-slot modes have been completed.

3.4.5 Deviation from Test Standard


No deviation.

3.4.6 Test Results

GFSK

Test Mode	Channel	Burst Width [ms]	Total Hops [Num]	Result [ms]	Limit [ms]	Verdict
DH1	Hop	0.399	330	131.67	<=400	PASS
DH3	Hop	1.656	160	264.96	<=400	PASS
DH5	Hop	2.899	110	318.89	<=400	PASS


Note: Test plots of the transmitting time slot are shown as below.

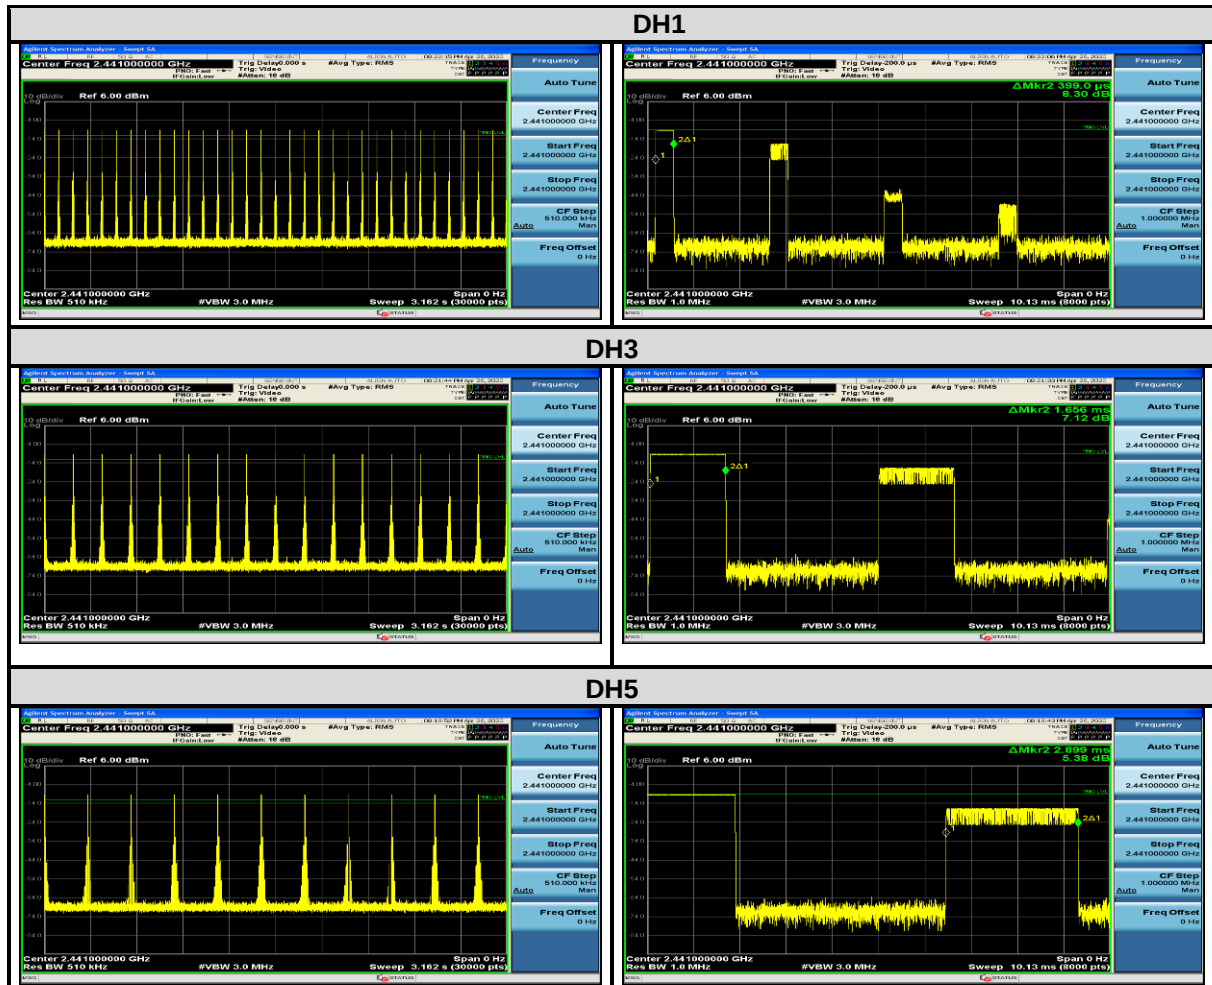

8DPSK

Test Mode	Channel	Burst Width [ms]	Total Hops [Num]	Result [ms]	Limit [ms]	Verdict
2DH1	Hop	0.404	320	129.28	<=400	PASS
2DH3	Hop	1.659	150	248.85	<=400	PASS
2DH5	Hop	2.911	110	320.21	<=400	PASS

Note: Test plots of the transmitting time slot are shown as below.

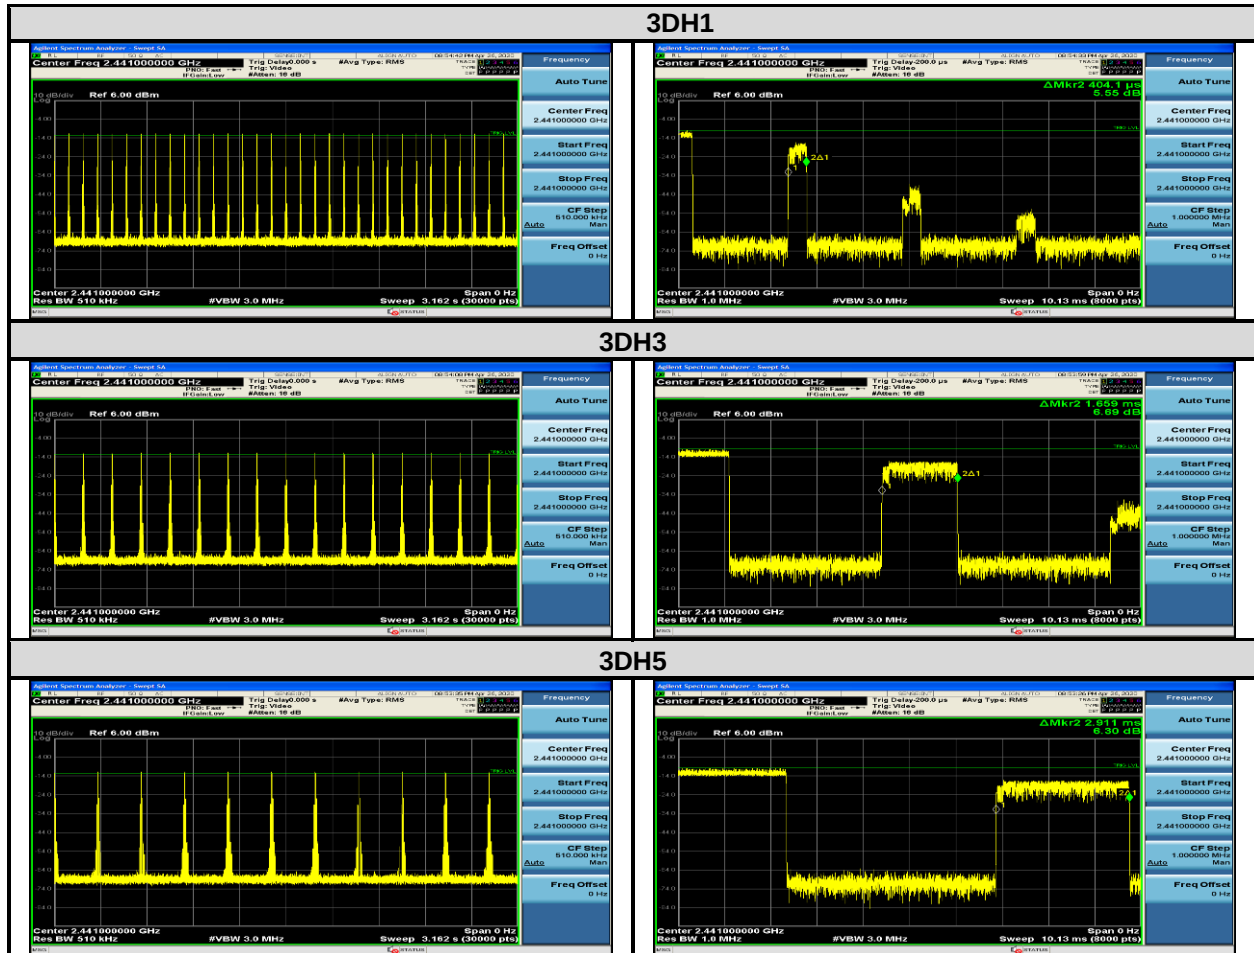


3.5 Channel Bandwidth

3.5.1 Limits of Channel Bandwidth Measurement

For frequency hopping system operating in the 2400-2483.5 MHz, if the 20 dB bandwidth of hopping channel is greater than 25 kHz, two-thirds 20 dB bandwidth of hopping channel shall be a minimum limit for the hopping channel separation.

3.5.2 Test Setup



3.5.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

3.5.4 Test Procedure

- Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
- Measure the frequency difference of two frequencies that were attenuated 20 dB from the reference level. Record the frequency difference as the emission bandwidth.
- Repeat above procedures until all frequencies measured were complete.

3.5.5 Deviation from Test Standard

No deviation.

3.5.6 EUT Operating Condition

The software provided by client enabled the EUT to transmit and receive data at lowest, middle and highest channel frequencies individually.


3.5.7 Test Results

Channel	Frequency (MHz)	20 dB Bandwidth (MHz)	
		GFSK	8DPSK
0	2402	1.092	1.338
39	2441	1.104	1.326
78	2480	1.098	1.344



3.6 Occupied Bandwidth Measurement

3.6.1 Test Setup



3.6.2 Test Instruments

Refer to section 4.1.2 to get information of above instrument

3.6.3 Test Procedure

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with resolution bandwidth in the range of 1 % to 5 % of the anticipated emission bandwidth, and a video bandwidth at least 3x the resolution bandwidth and set the detector to PEAK. The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5 % of the total mean power of a given emission.

3.6.4 Deviation from Test Standard


No deviation.

3.6.5 EUT Operating Conditions

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

3.6.6 Test Results

Channel	Frequency (MHz)	Occupied Bandwidth (MHz)	
		GFSK	8DPSK
0	2402	0.87067	1.1704
39	2441	0.85822	1.1645
78	2480	0.86296	1.1676

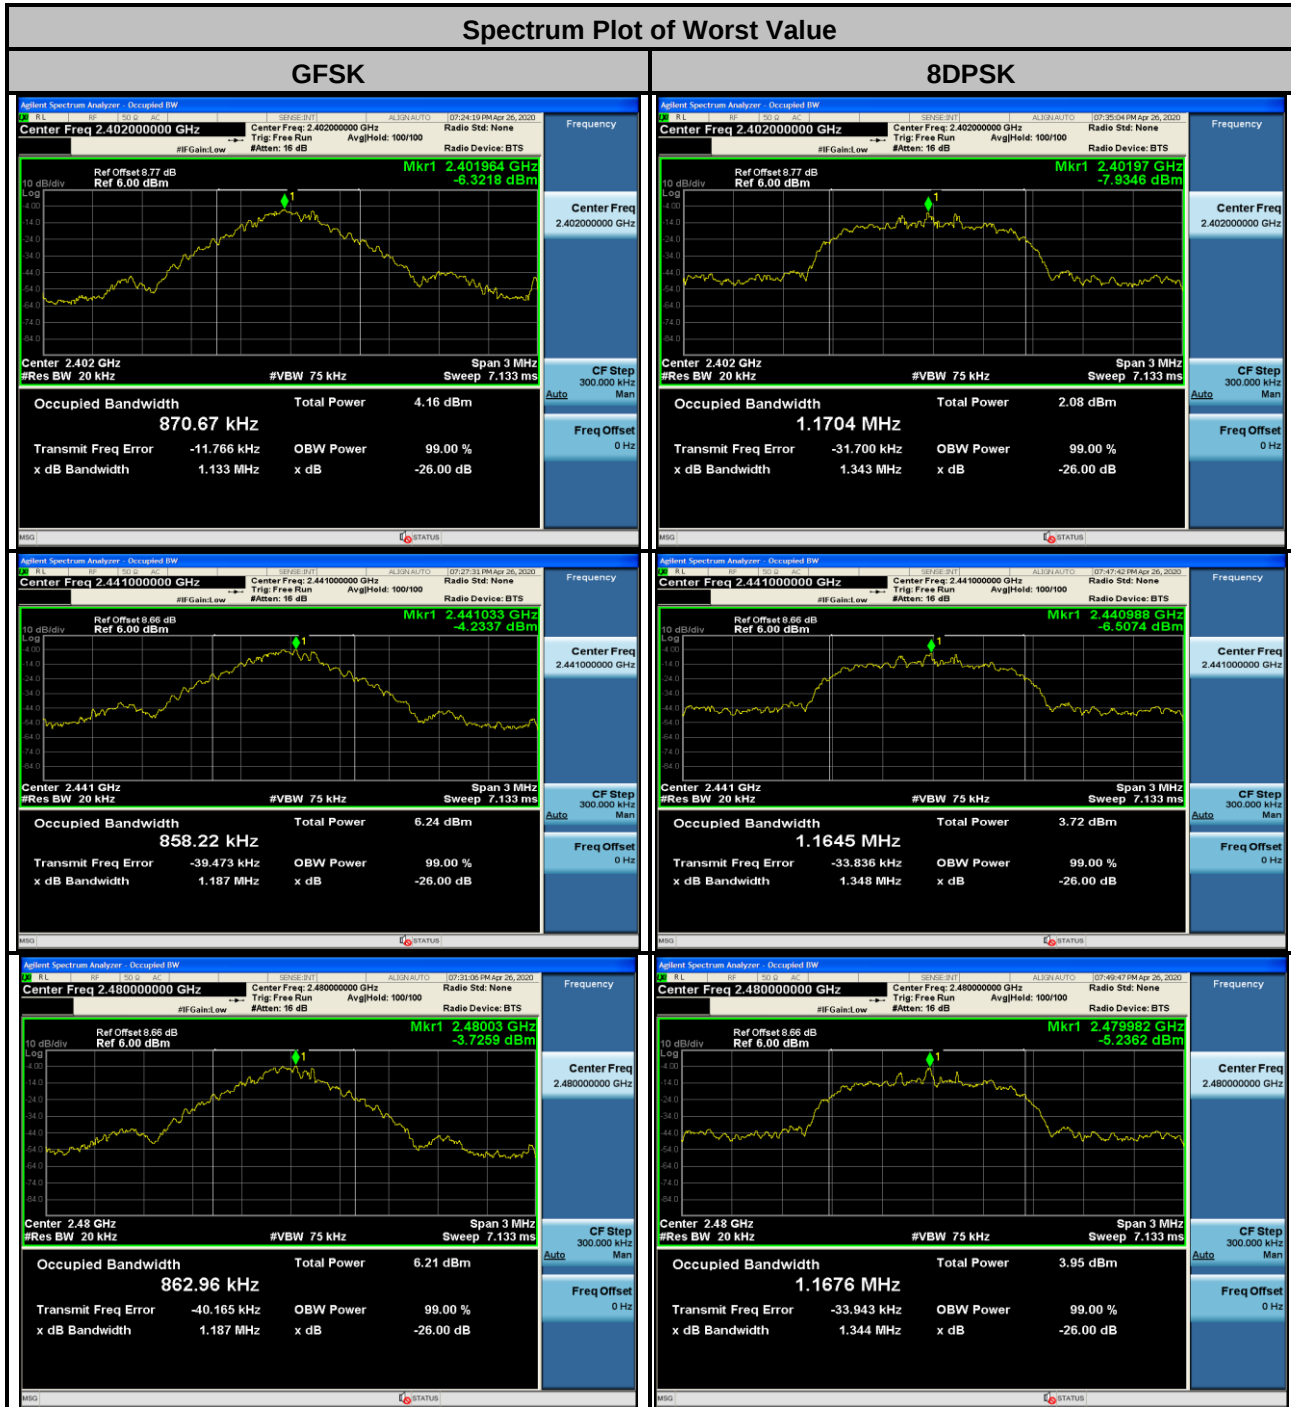

3.7 Hopping Channel Separation

3.7.1 Limits of Hopping Channel Separation Measurement

At least 25 kHz or two-third of 20 dB hopping channel bandwidth (whichever is greater).

3.7.2 Test Setup



3.7.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

3.7.4 Test Procedure

Measurement Procedure REF

- Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range.
- By using the MaxHold function record the separation of two adjacent channels.
- Measure the frequency difference of these two adjacent channels by SA MARK function. And then plot the result on SA screen.
- Repeat above procedures until all frequencies measured were complete.

3.7.5 Deviation from Test Standard


No deviation.

3.7.6 Test Results

Channel No.	Frequency (MHz)	Adjacent Channel Separation (MHz)		20dB Bandwidth (MHz)		Minimum Limit (MHz)		Pass / Fail
		GFSK	8DPSK	GFSK	8DPSK	GFSK	8DPSK	
0	2402	1.000	0.999	1.092	1.338	0.73	0.90	Pass
39	2441	1.002	0.996	1.104	1.326	0.74	0.89	Pass
78	2480	1.002	0.996	1.098	1.344	0.74	0.90	Pass

Note:

- The minimum limit is two-third 20 dB bandwidth.

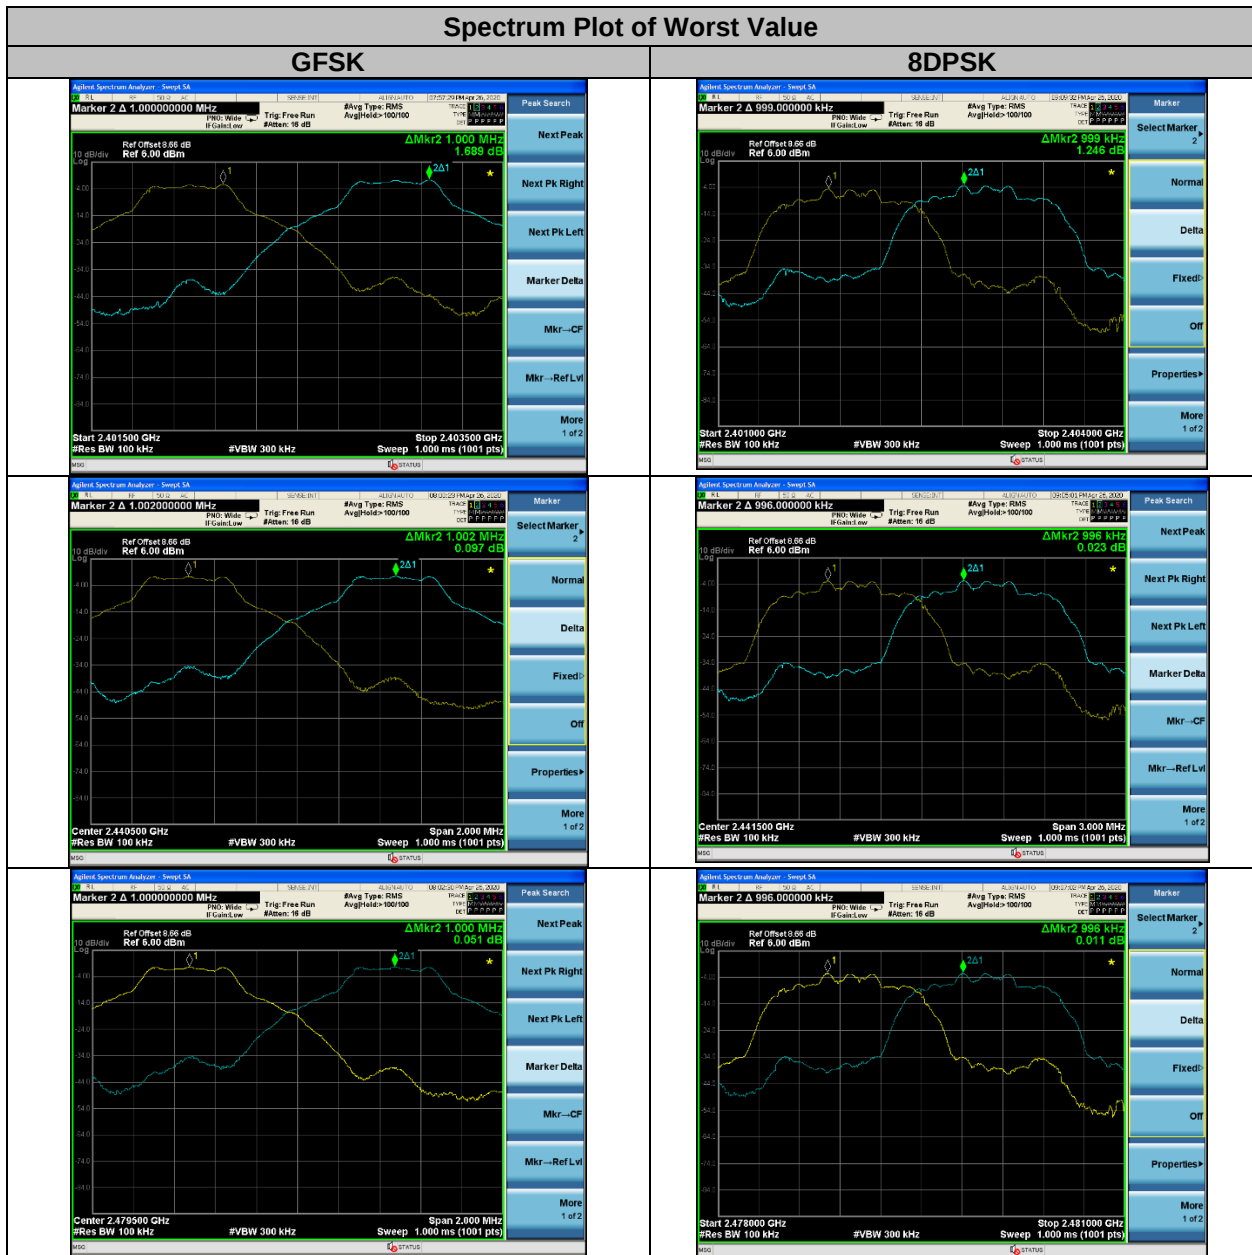


3.8 Maximum Output Power

3.8.1 Limits of Maximum Output Power Measurement

The Maximum Output Power Measurement is 125 mW.

3.8.2 Test Setup



3.8.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

3.8.4 Test Procedure

- Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
- The center frequency of the spectrum analyzer is set to the fundamental frequency and using 3 MHz RBW and 10 MHz VBW.
- Measure the captured power within the band and recording the plot.
- Repeat above procedures until all frequencies required were complete.

3.8.5 Deviation from Test Standard

No deviation.

3.8.6 EUT Operating Condition


The software provided by client enabled the EUT to transmit and receive data at lowest, middle and highest channel frequencies individually.

3.8.7 Test Results

Peak power:

Channel No.	Freq. (MHz)	Output Power (mW)		Output Power (dBm)		Power Limit (mW)	Pass / Fail
		GFSK	8DPSK	GFSK	8DPSK		
0	2402	0.6326	0.6289	-1.989	-2.014	125	Pass
39	2441	0.9678	0.9258	-0.142	-0.335	125	Pass
78	2480	1.0067	0.9956	0.029	-0.019	125	Pass


The maximum value of plot:

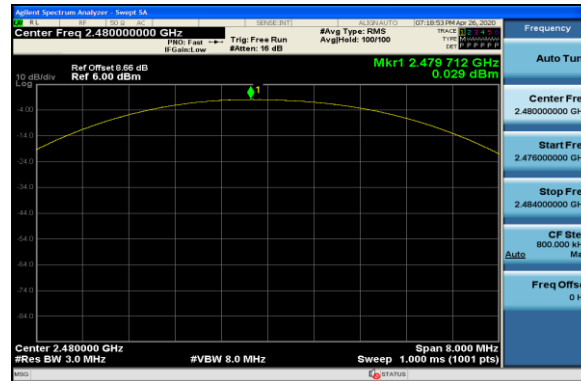

Average power

Channel No.	Freq. (MHz)	Output Power (mW)		Output Power (dBm)		Power Limit (mW)	Pass / Fail
		GFSK	8DPSK	GFSK	8DPSK		
0	2402	0.6136	0.4943	-2.121	-3.06	125	Pass
39	2441	0.9200	0.7495	-0.362	-1.252	125	Pass
78	2480	0.9982	0.9906	-0.008	-0.041	125	Pass

The maximum value of plot:

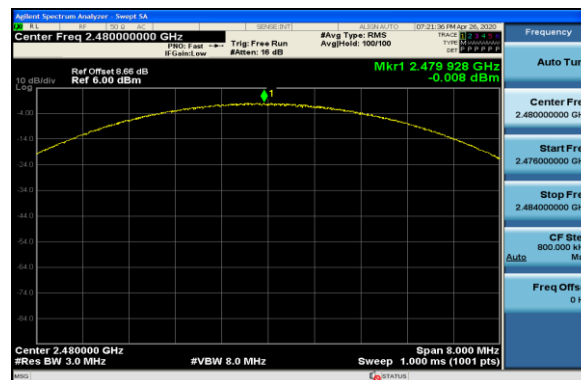

3.9 Conducted Out of Band Emission Measurement

3.9.1 Limits Of Conducted Out Of Band Emission Measurement

For average power:

Below -30 dB of the highest emission level of operating band (in 100 kHz Resolution Bandwidth).

For peak power:

Below -20 dB of the highest emission level of operating band (in 100 kHz Resolution Bandwidth)

3.9.2 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

3.9.3 Test Procedure

The transmitter output was connected to the spectrum analyzer via a low lose cable. Set both RBW and VBW of spectrum analyzer to 100 kHz and 300 kHz with suitable frequency span including 100 MHz bandwidth from band edge. The band edges was measured and recorded.

3.9.4 Deviation from Test Standard

No deviation.


3.9.5 EUT Operating Condition

The software provided by client enabled the EUT to transmit and receive data at lowest, middle and highest channel frequencies individually.


3.9.6 Test Results

The spectrum plots are attached on the following images. 20 dB offset below the reference level. It shows compliance with the requirement.

GFSK-Hopping mode off

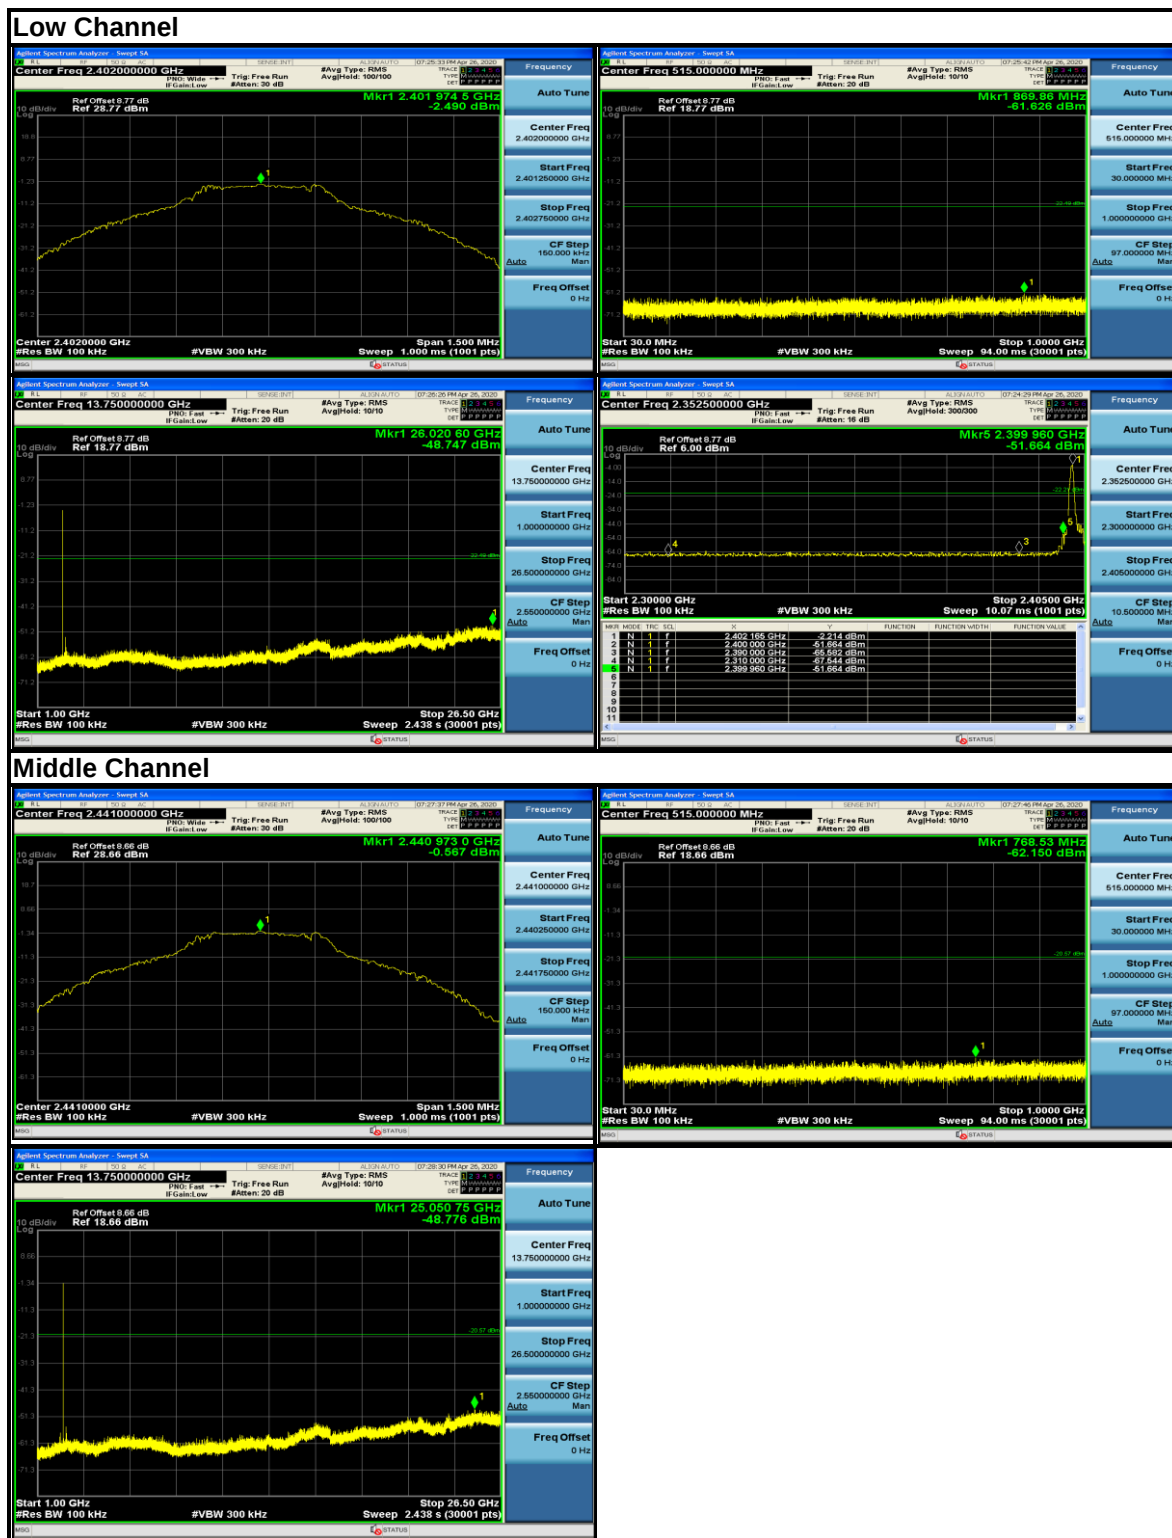


High Channel

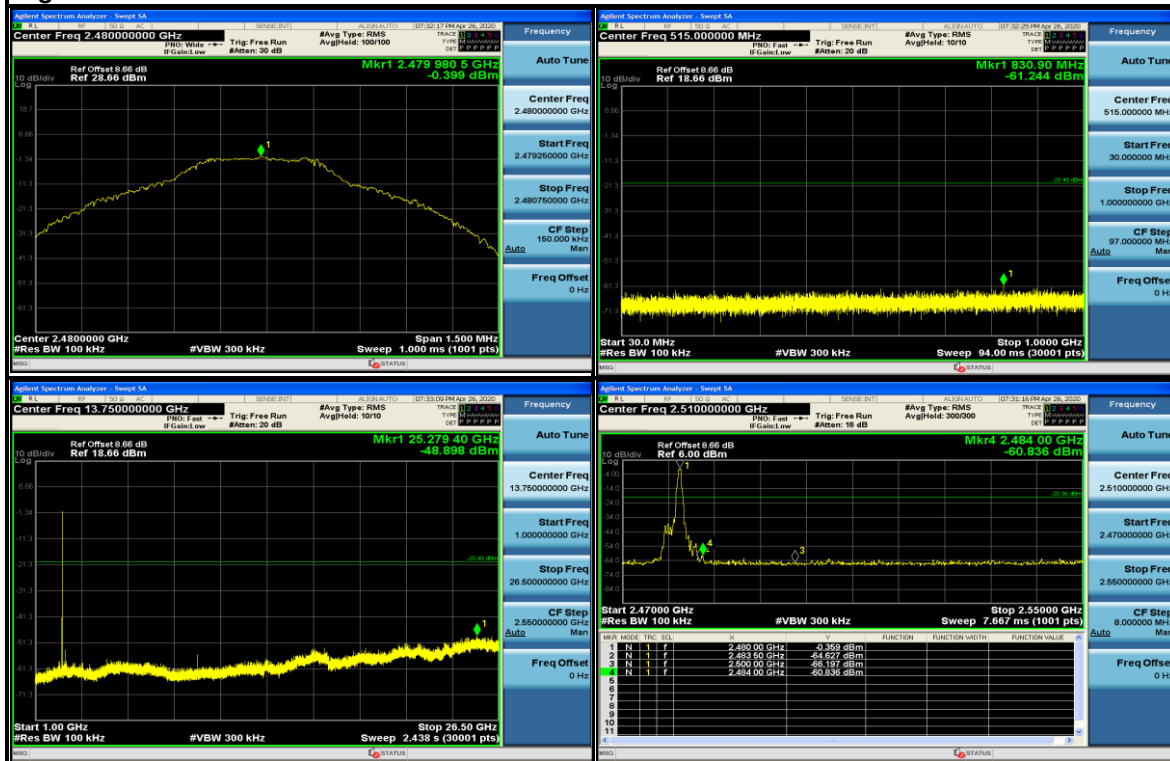


8DPSK


Low Channel

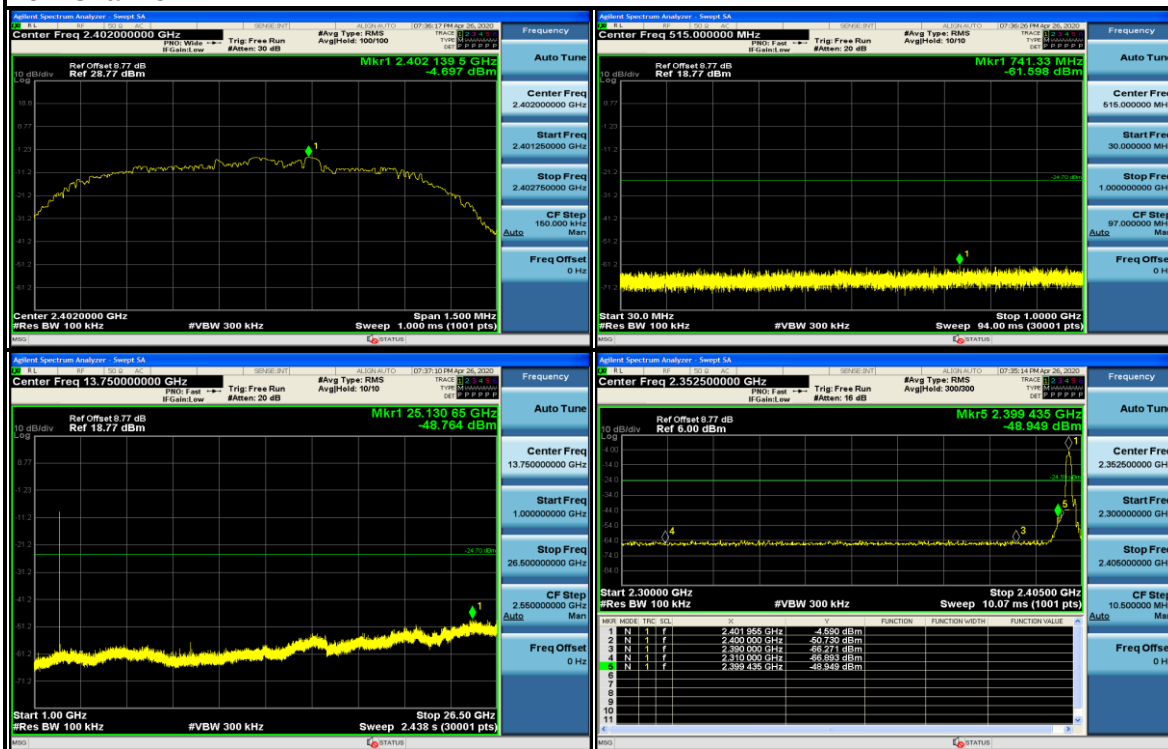



Middle Channel

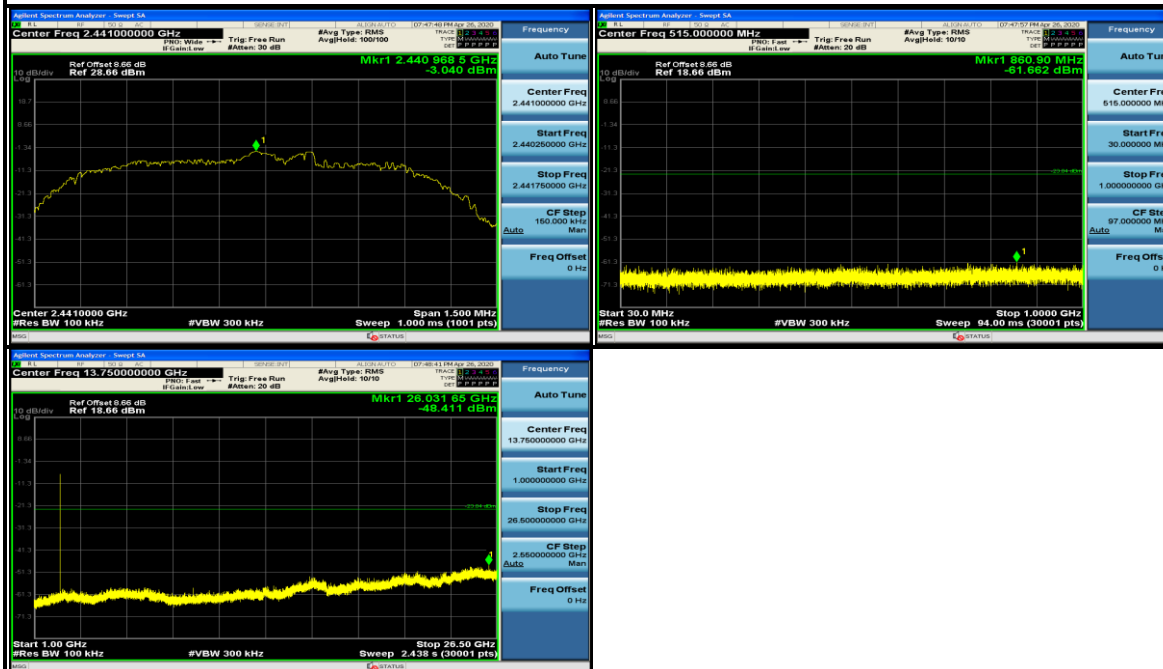



High Channel

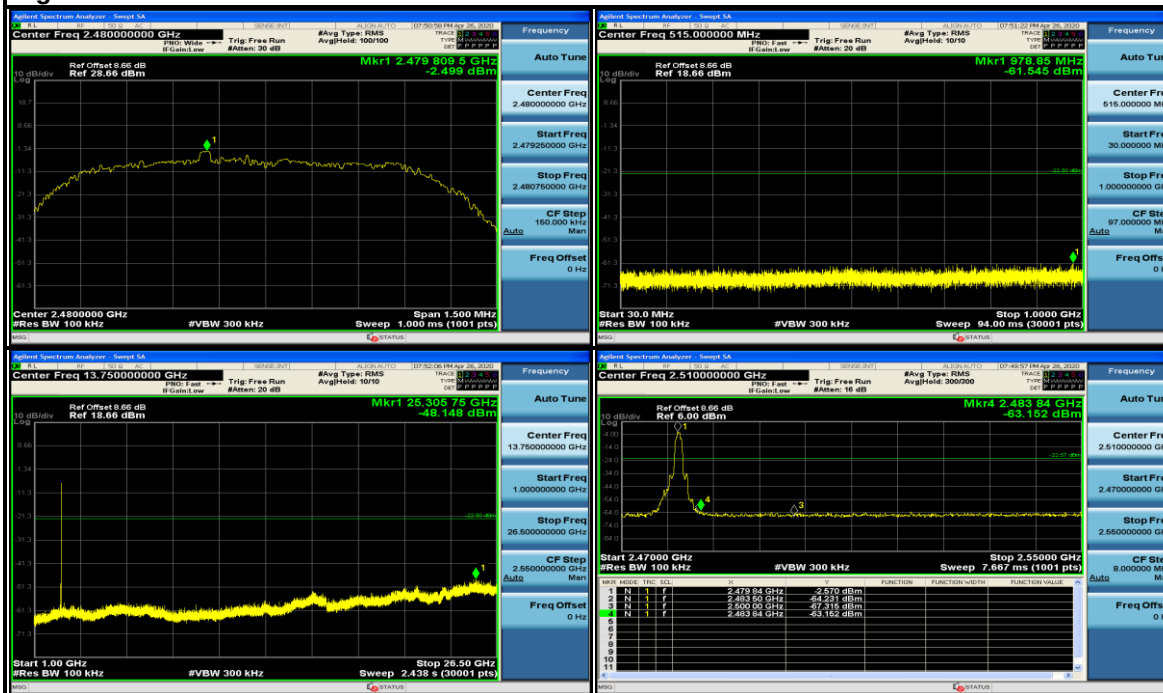

GFSK-Hopping mode

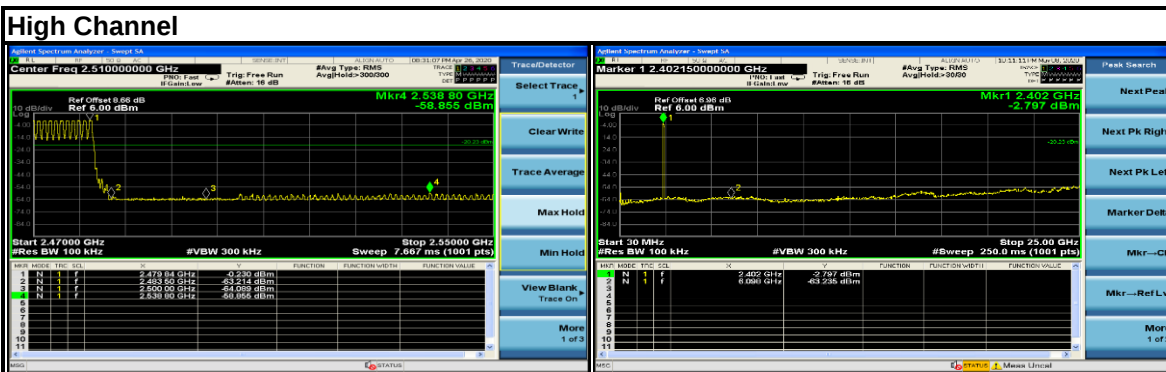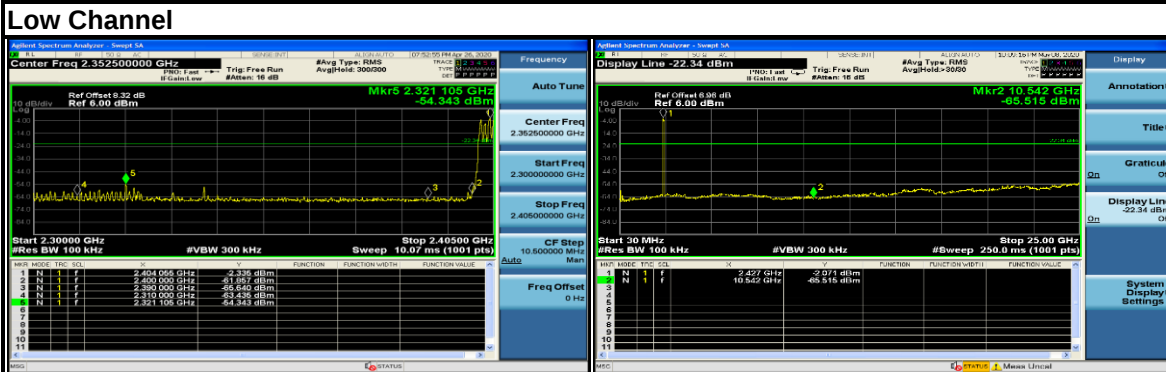

8DPSK-Hopping mode

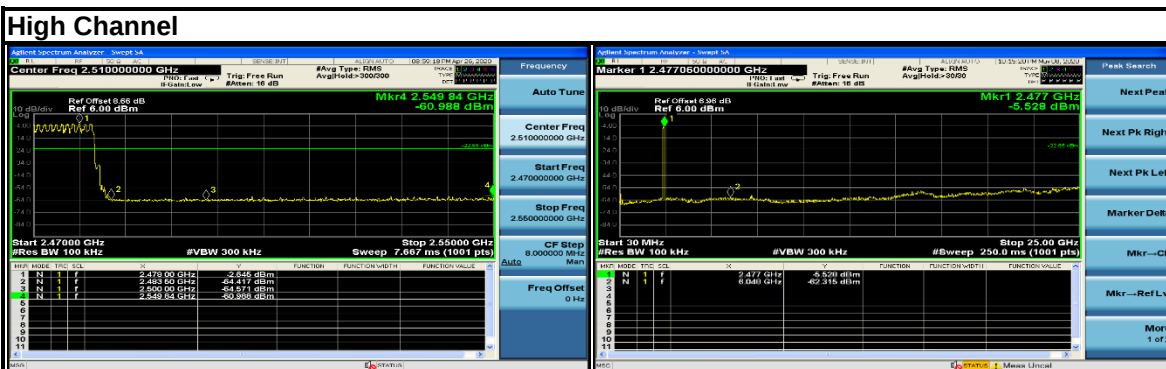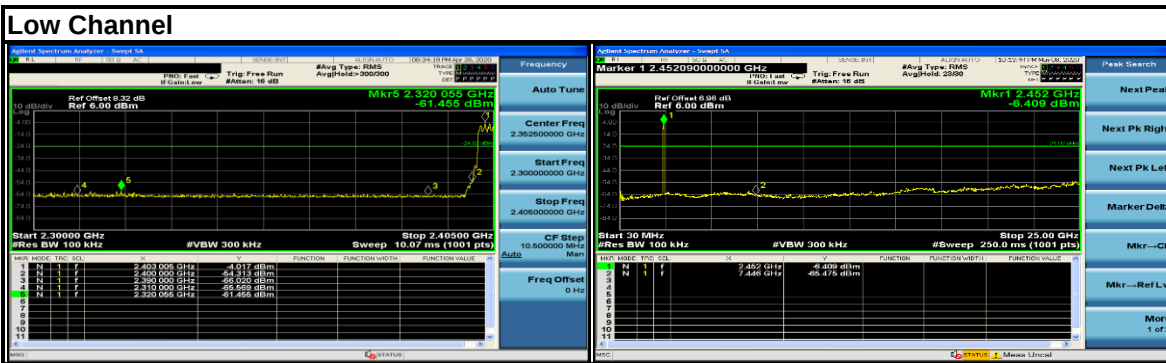

4 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo).

4.1.2 Test Instruments

Description & Manufacturer	Model No.	Serial No.	Date of Calibration	Due Date of Calibration
Spectrum Keysight	N9020A	MY51240612	2019/10/18	2020/10/17
Spectrum Analyzer Rohde&Schwarz	FSV-40N	101783	2019/10/18	2020/10/17
Power Meter 10Hz~18GHz Tonscend	JS0806-2	188060126	2019/10/18	2020/10/17
Signal generator Keysight	N5182A	GB40051020	2019/10/18	2020/10/17
Signal generator Keysight	N5182A	MY47420944	2019/10/18	2020/10/17
Test Software Tonscend	JS0806-2	NA	NA	NA
Hygrothermograph Yuhuaze	HTC-1	NA	2019/10/18	2020/10/17

Note: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to CEPREI/CHINA.

2. The test was performed in Chamber 1.

Appendix – Information on the Testing Laboratories

We, Hwa-Hsing (Dongguan) Co., Ltd., A global provider of TESTING and CERTIFICATION services for consumer products, electronic products and wireless information technology products. Adhering to the core values “HONEST and TRUSTWORTHY, OBJECTIVE and IMPARTIALITY, RIGOROUS and AFFICIENT”, commitment to provide professional, perfect and efficient comprehensive ONE-STOP solution of TESTING and CERTIFICATION services for Manufacturers, Buyers, Traders, Brands, Retailers. Assist client to better manage risk, protect their brands, reduce costs and cut time to over 150 markets in global. Our laboratories are FCC recognized accredited test firms and accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Lab Address: [No.101, Bld N1, Yuyuan 2Rd, Yuyuan Industrial Park, HuangJiang Town, Dongguan, China](#)

Contact Tel: [0769-83078199](tel:0769-83078199)

Email: customerservice.dg@hwa-hsing.com

Web Site: www.hwa-hsing.com

The address and road map of all our labs can be found in our web site also.

--- END ---