
FCC Test Report

Report No.: AGC01835151201FE03

FCC ID : 2AGB2APOLLO
APPLICATION PURPOSE : Original Equipment
PRODUCT DESIGNATION : Bluetooth Speaker
BRAND NAME : N/A
MODEL NAME : Apollo
CLIENT : LSTN Inc.
DATE OF ISSUE : Dec.21,2015
STANDARD(S) : FCC Part 15 Rules
TEST PROCEDURE(S)
REPORT VERSION : V1.0

Attestation of Global Compliance (Shenzhen) Co., Ltd



CAUTION:

This report shall not be reproduced except in full without the written permission of the test laboratory and shall not be quoted out of context.



Report Revise Record

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	/	Dec.21,2015	Valid	Original Report

TABLE OF CONTENTS


1. VERIFICATION OF CONFORMITY	4
2. GENERAL INFORMATION	5
2.1. PRODUCT DESCRIPTION.....	5
2.2. TABLE OF CARRIER FREQUENCYS.....	5
3. MEASUREMENT UNCERTAINTY.....	7
4. DESCRIPTION OF TEST MODES.....	7
5. SYSTEM TEST CONFIGURATION	9
5.1. CONFIGURATION OF EUT SYSTEM	9
5.2. EQUIPMENT USED IN EUT SYSTEM	9
5.3. SUMMARY OF TEST RESULTS	9
6. TEST FACILITY	10
7 ALL TEST EQUIPMENT LIST	10
8. RADIATED EMISSION	12
8.1TEST LIMIT.....	12
8.2. MEASUREMENT PROCEDURE	13
8.3. TEST SETUP.....	15
8.4. TEST RESULT	17
9. BAND EDGE EMISSION	43
9.1. MEASUREMENT PROCEDURE	43
9.2 TEST SETUP	43
9.3 RADIATED TEST RESULT	44
10. 20DB BANDWIDTH.....	52
10.1. MEASUREMENT PROCEDURE	52
10.2. TEST SET-UP	52
10.3. LIMITS AND MEASUREMENT RESULTS.....	52
11. FCC LINE CONDUCTED EMISSION TEST	62
11.1. LIMITS OF LINE CONDUCTED EMISSION TEST	62
11.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST.....	62
11.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST	63
11.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST.....	63
11.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST.....	64
APPENDIX A: PHOTOGRAPHS OF TEST SETUP	68
APPENDIX B: PHOTOGRAPHS OF EUT	71

1. VERIFICATION OF CONFORMITY

Applicant	LSTN Inc.
Address	8853 Sunset Blvd. 2nd Floor ,W. Hollywood ,California ,United States ,90069
Manufacturer	Cosonic Acoustic technology Co., Ltd.
Address	5/F,1st Building,No.6, South Industrial Road,Songshan Lake, Dongguan, Guangdong, China 523808
Product Designation	Bluetooth Speaker
Brand Name	N/A
Test Model	Apollo
Date of test	Dec.09,2015 to Dec.14,2015
Deviation	None
Condition of Test Sample	Normal
Report Template	AGCRT-US-BR/RF

We hereby certify that:

The above equipment was tested by Compliance Certification Service(Shenzhen) Inc. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.4 (2009) and the energy emitted by the sample EUT tested as described in this report is in compliance with radiated emission limits of FCC Rules Part 15.249.



Tested By _____
Time Huang(Huang Nanhui) Dec.21,2015



Reviewed By _____
Forrest Lei(Lei Yonggang) Dec.21,2015



Approved By _____
Solger Zhang(Zhang Hongyi)
Authorized Officer Dec.21,2015

2. GENERAL INFORMATION

2.1. PRODUCT DESCRIPTION

A major technical description of EUT is described as following

Operation Frequency	2.402 GHz to 2.480GHz
RF Output Power	2.15dBm(Max)
Bluetooth Version	V4.0
Modulation	GFSK, π /4-DQPSK, 8DPSK
Number of channels	79 for BR/EDR, 40 for BLE
Hardware Version	V1.0
Software Version	V1.0
Antenna Designation	PCB Antenna (Met 15.203 Antenna requirement)
Antenna Gain	0dBi
Power Supply	DC 7.4V by battery

Note: The USB port only used for charging and can't be used to transfer data with PC.

2.2. TABLE OF CARRIER FREQUENCIES

BR/EDR channel List

Frequency Band	Channel Number	Frequency
2400~2483.5MHZ	0	2402MHZ
	1	2403MHZ
	:	:
	38	2440 MHZ
	39	2441 MHZ
	40	2442 MHZ
	:	:
	77	2479 MHZ
	78	2480 MHZ

BLE Channel List

Frequency Band	Channel Number	Frequency
2400~2483.5MHZ	0	2402MHZ
	1	2404MHZ
	:	:
	38	2478 MHZ
	39	2480 MHZ

3. MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

No.	Item	Uncertainty
1	Conducted Emission Test	± 3.18 dB
2	All emissions, radiated	± 3.91 dB
3	Temperature	± 0.5 °C
4	Humidity	± 2 %


4. DESCRIPTION OF TEST MODES

NO.	TEST MODE DESCRIPTION
1	Low channel GFSK
2	Middle channel GFSK
3	High channel GFSK
4	Low channel $\pi/4$ -DQPSK
5	Middle channel $\pi/4$ -DQPSK
6	High channel $\pi/4$ -DQPSK
7	Low channel 8DPSK
8	Middle channel 8DPSK
9	High channel 8DPSK
10	BT Link with charging
11	BT Link without charging

Note:

1. All the test modes can be supply by battery, only the result of the worst case was recorded in the report, if no other cases.
2. For Radiated Emission, 3axis were chosen for testing for each applicable mode.
3. The EUT used fully-charged battery when tested.


Software Setting

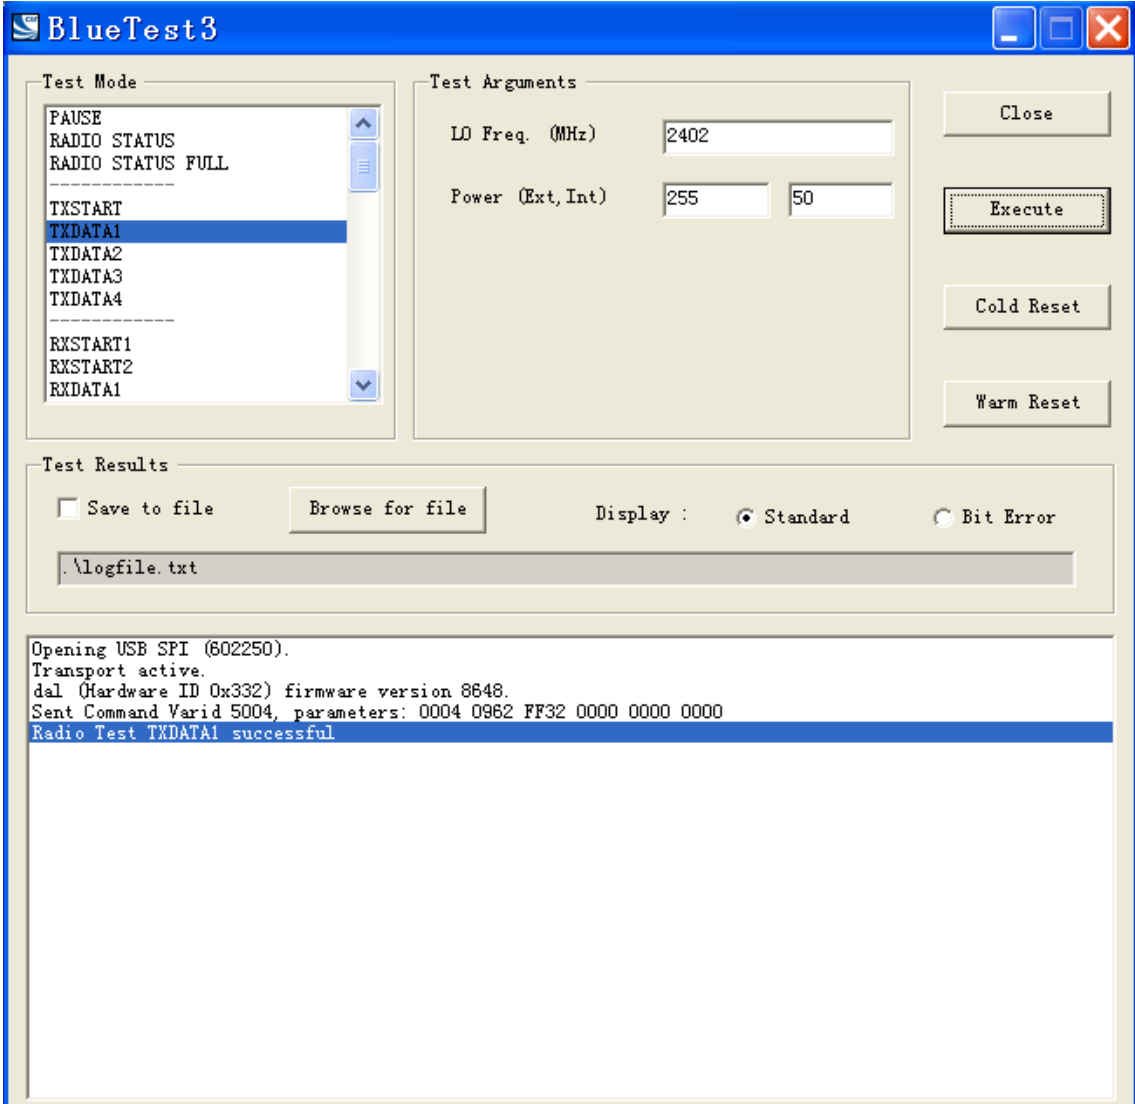

5. SYSTEM TEST CONFIGURATION


5.1. CONFIGURATION OF EUT SYSTEM

Configure 1: (Normal hopping)

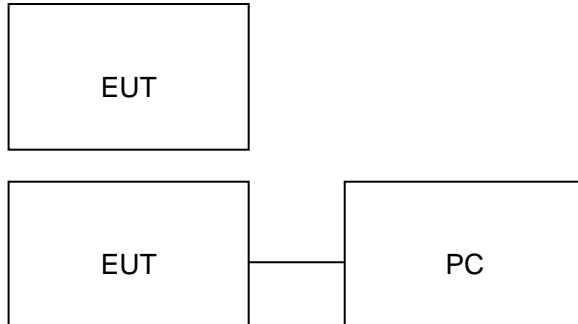

Note: Owing to the EUT has own battery, Testing will be performed while PC or adapter remove.

Configure 2: (Control continuous TX)

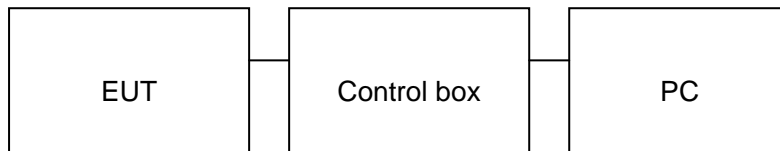

5.2. EQUIPMENT USED IN EUT SYSTEM

Item	Equipment	Model No.	ID or Specification	Remark
1	Bluetooth Speaker	N/A	Apollo	EUT
2	PC	Lenovo	SL410K	A.E
3	Control box	N/A	N/A	A.E
4	USB Cable	N/A	0.6m, unshielded	A.E
7	Temporary Antenna Connector	T10	N/A	A.E

5.3. SUMMARY OF TEST RESULTS

FCC RULES	DESCRIPTION OF TEST	RESULT
§15.249	Radiated Emission	Compliant
§15.249	Band Edges	Compliant
§15.207	Conduction Emission	Compliant
N/A	BANDWIDTH	Compliant

6. TEST FACILITY

Site	Compliance Certification Service(Shenzhen) Inc.
Location	No.10-1 Mingkeda Logistics Park, No.18 Huanguan South RD. Guan lan Town,Baoan Distr
FCC Registration No.	441872
Description	The test site is constructed and calibrated to meet the FCC requirements in documents ANSI C63.4:2009.

7 ALL TEST EQUIPMENT LIST

Radiated Emission Test Site 966(2)					
Name of Equipment	Manufacturer	Model Number	Serial Number	Last Calibration	Due Calibration
PSA Series Spectrum Analyzer	Agilent	E4446A	US44300399	03/01/2015	02/29/2016
EMI TEST RECEIVER	ROHDE&SCHWARZ	ESCI	100783	03/09/2015	03/08/2016
Amplifier	MITEQ	AM-1604-3000	1123808	03/18/2015	03/17/2016
High Noise Amplifier	Agilent	8449B	3008A01838	03/18/2015	03/17/2016
Board-Band Horn Antenna	Schwarzbeck	BBHA 9170	9170-497	07/10/2015	07/09/2016
Bilog Antenna	SCHAFFNER	CBL6143	5082	03/01/2015	02/29/2016
Horn Antenna	SCHWARZBECK	BBHA9120	D286	03/01/2015	02/29/2016
Loop Antenna	COM-POWER	AL-130	121044	09/27/2015	09/26/2016
Turn Table	N/A	N/A	N/A	N.C.R	N.C.R
Controller	Sunol Sciences	SC104V	022310-1	N.C.R	N.C.R
Controller	CT	N/A	N/A	N.C.R	N.C.R
Temp. / Humidity Meter	Anymetre	JR913	N/A	02/28/2015	02/27/2016
Antenna Tower	SUNOL	TLT2	N/A	N.C.R	N.C.R
Radiation Cable 1	VEM	SE1	S004	07/10/2015	07/09/2016
Radiation Cable 2	VEM	SE1	S005	07/10/2015	07/09/2016
Test S/W	FARAD	LZ-RF / CCS-SZ-3A2			

Conducted Emission Test Site					
Name of Equipment	Manufacturer	Model Number	Serial Number	Last Calibration	Due Calibration
EMI TEST RECEIVER	ROHDE&SCHWARZ	ESCI	100783	03/09/2015	03/08/2016
LISN(EUT)	ROHDE&SCHWARZ	ENV216	101543-WX	03/09/2015	03/08/2016
LISN	EMCO	3825/2	8901-1459	03/09/2015	03/08/2016
Temp. / Humidity Meter	VICTOR	HTC-1	N/A	03/04/2015	03/03/2016
Conduction Cable	VEM	ME1	M001	07/10/2015	07/09/2016
Test S/W	FARAD	EZ-EMC/ CCS-3A1-CE			

8. RADIATED EMISSION

8.1 TEST LIMIT

Standard FCC15.249

Fundamental Frequency	Field Strength of Fundamental (millivolts/meter)	Field Strength of Harmonics (microvolts/meter)
900-928MHz	50	500
2400-2483.5MHz	50	500
5725-5875MHz	50	500
24.0-24.25GHz	250	2500

Standard FCC 15.209

Frequency (MHz)	Distance Meters	Field Strengths Limit	
		μ V/m	dB(μ V)/m
0.009 ~ 0.490	300	2400/F(kHz)	---
0.490 ~ 1.705	30	24000/F(kHz)	---
1.705 ~ 30	30	30	---
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46.0
960 ~ 1000	3	500	54.0
Above 1000	3	Other:74.0 dB(μ V)/m (Peak) 54.0 dB(μ V)/m (Average)	

Remark: (1) Emission level $\text{dB}\mu\text{V} = 20 \log \text{Emission level } \mu\text{V/m}$
(2) The smaller limit shall apply at the cross point between two frequency bands.
(3) Distance is the distance in meters between the measuring instrument, antenna and the closest point of any part of the device or system.

8.2. MEASUREMENT PROCEDURE

1. Configure the EUT according to ANSI C63.4. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. For emissions above 1GHz, use 1.5MHz VBW and RBW for peak reading. Then 1.5MHz RBW and 10Hz VBW for average reading in spectrum analyzer.

Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.

7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum values.
8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High - Low scan is not required in this case.


The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Start ~Stop Frequency	9KHz~150KHz/RB 200Hz for QP
Start ~Stop Frequency	150KHz~30MHz/RB 9KHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RB 120KHz for QP
Start ~Stop Frequency	1GHz~26.5GHz 1.5MHz/1.5MHz for Peak, 1.5MHz/10Hz for Average


Receiver Parameter	Setting
Start ~Stop Frequency	9KHz~150KHz/RB 200Hz for QP
Start ~Stop Frequency	150KHz~30MHz/RB 9KHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RB 120KHz for QP

8.3. TEST SETUP


Radiated Emission Test-Setup Frequency Below 30MHz

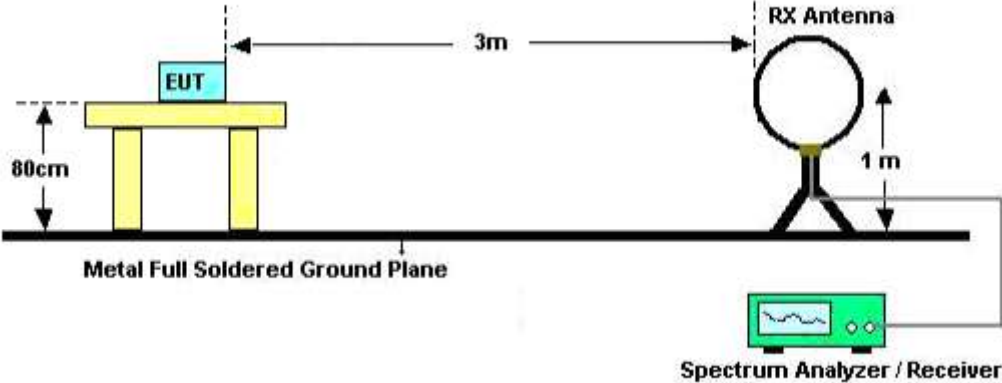

RADIATED EMISSION TEST SETUP 30MHz-1000MHz

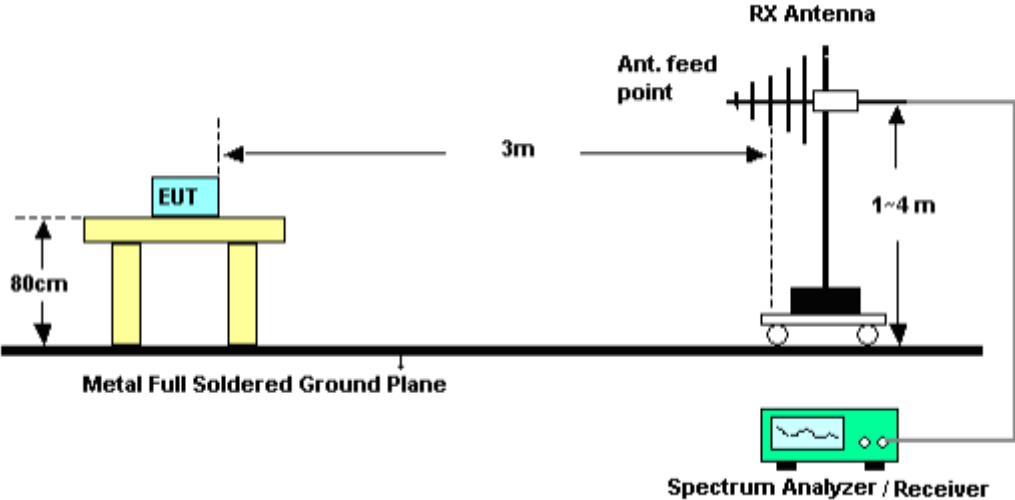

RADIATED EMISSION TEST SETUP ABOVE 1000MHz

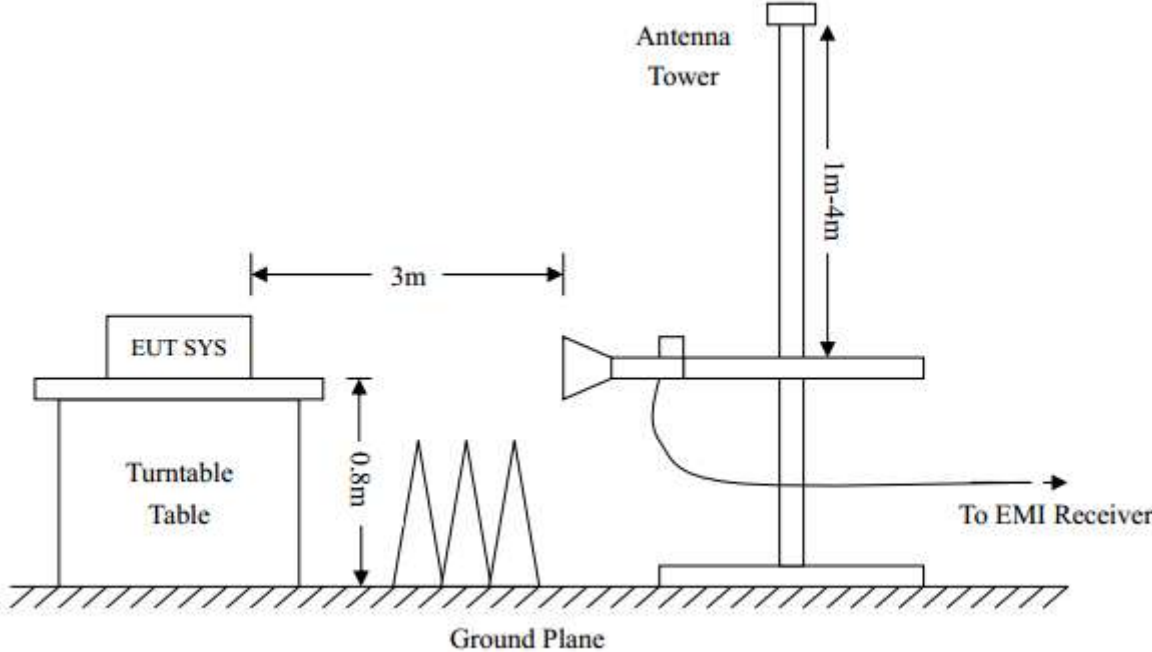

8.4. TEST RESULT


**(Worst modulation: GFSK)
 FOR BR/EDR**

RADIATED EMISSION BELOW 30MHZ

No emission found between lowest internal used/generated frequencies to 30MHz.

RADIATED EMISSION BELOW 1GHZ


RADIATED EMISSION TEST- (30MHZ-1GHZ)-LOW CHANNEL-HORIZONTAL

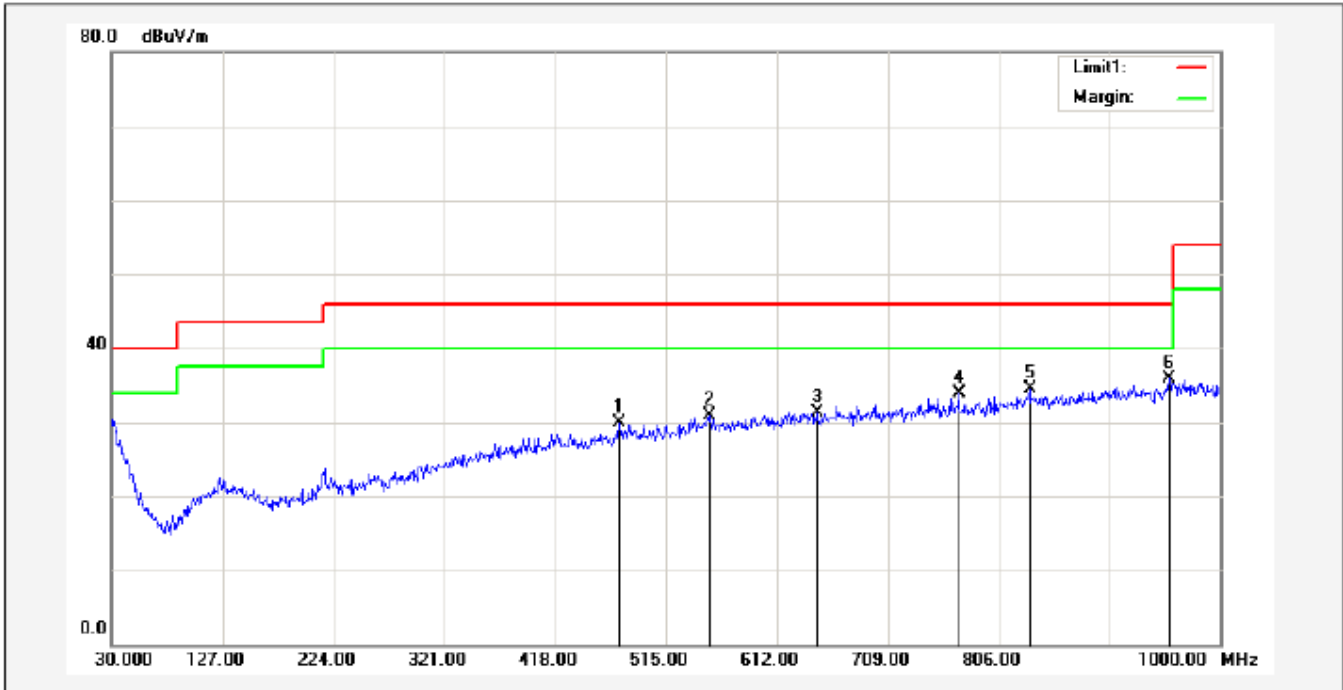

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (deg.)	Height (cm)	Remark
1	474.2600	44.56	-14.57	29.99	46.00	-16.01			peak
2	552.8300	44.07	-13.15	30.92	46.00	-15.08			peak
3	646.9200	43.83	-12.50	31.33	46.00	-14.67			peak
4	771.0800	45.05	-11.14	33.91	46.00	-12.09			peak
5	833.1600	45.20	-10.63	34.57	46.00	-11.43			peak
6*	955.3800	44.88	-8.96	35.92	46.00	-10.08			peak

RESULT: PASS

RADIATED EMISSION TEST- (30MHZ-1GHZ)-LOW CHANNEL -VERTICAL

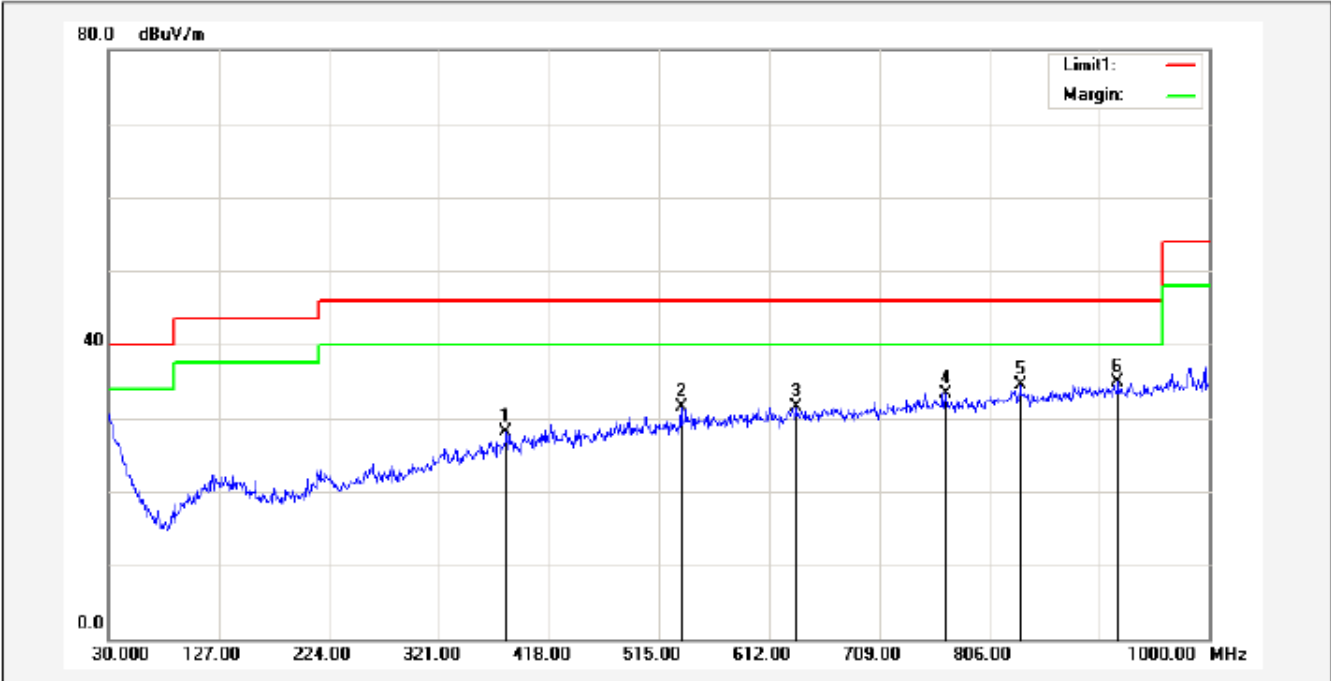


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (deg.)	Height (cm)	Remark
1	380.1700	44.53	-16.46	28.07	46.00	-17.93			peak
2	534.4000	45.16	-13.62	31.54	46.00	-14.46			peak
3	636.2500	43.94	-12.48	31.46	46.00	-14.54			peak
4	767.2000	44.49	-11.10	33.39	46.00	-12.61			peak
5	833.1600	45.12	-10.63	34.49	46.00	-11.51			peak
6*	919.4900	44.34	-9.36	34.98	46.00	-11.02			peak

RESULT: PASS

Note: 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

2. The "Factor" value can be calculated automatically by software of measurement system.


RADIATED EMISSION TEST- (30MHZ-1GHZ)-MIDDLE CHANNEL-HORIZONTAL

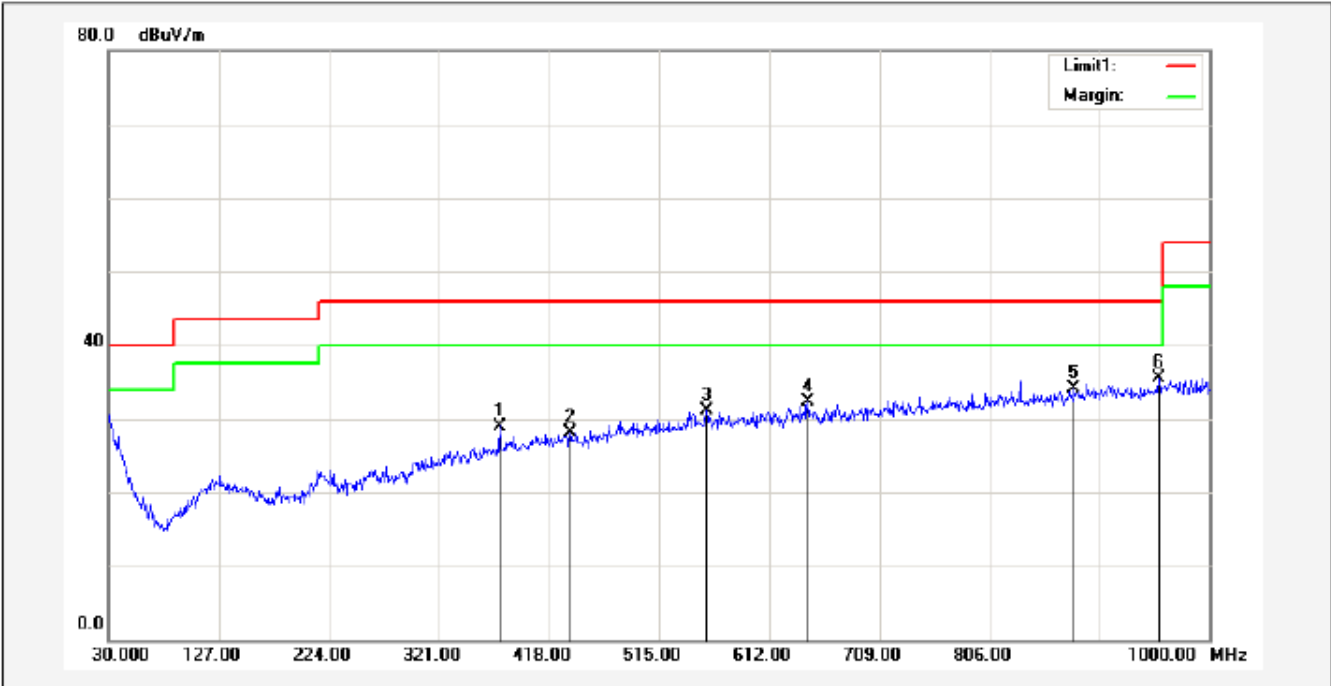

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (deg.)	Height (cm)	Remark
1	374.3500	45.89	-16.89	29.00	46.00	-17.00			peak
2	436.4300	43.79	-15.65	28.14	46.00	-17.86			peak
3	556.7100	44.41	-13.21	31.20	46.00	-14.80			peak
4	645.9500	44.85	-12.50	32.35	46.00	-13.65			peak
5	880.6900	44.00	-9.97	34.03	46.00	-11.97			peak
6*	955.3800	44.40	-8.96	35.44	46.00	-10.56			peak

RESULT: PASS

RADIATED EMISSION TEST- (30MHZ-1GHZ)- MIDDLE CHANNEL -VERTICAL

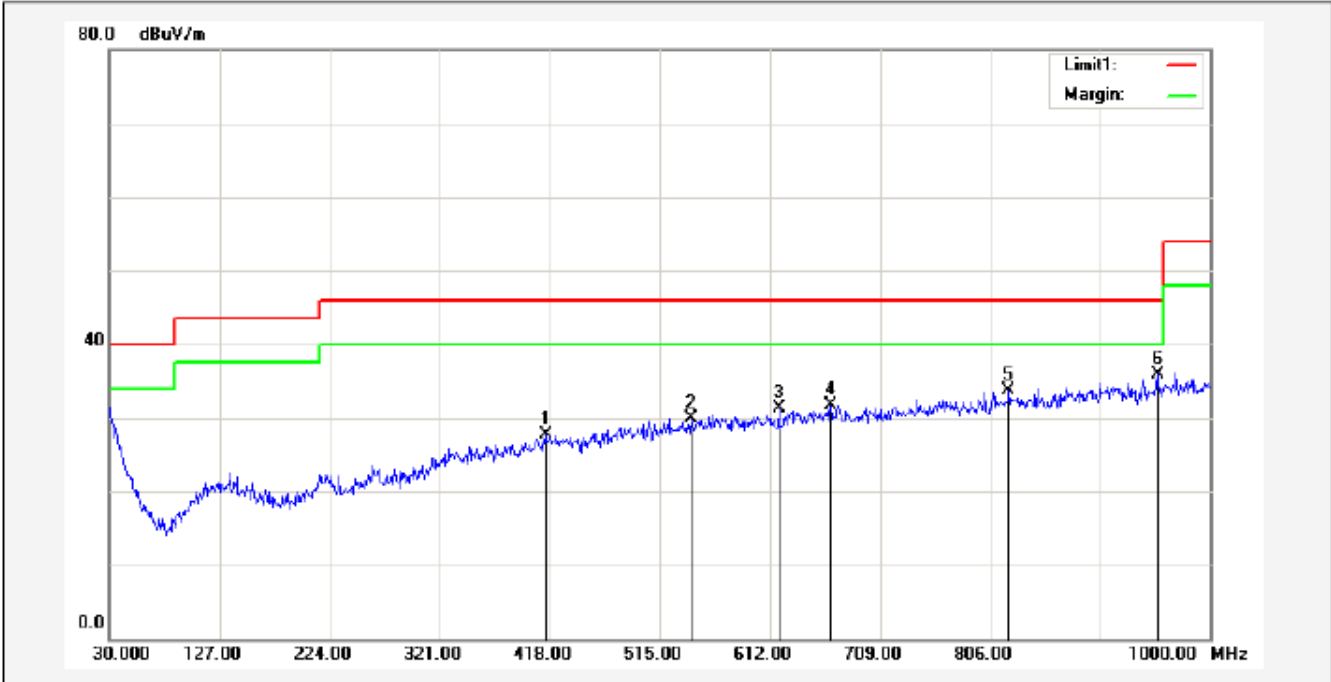


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (deg.)	Height (cm)	Remark
1	414.1200	43.28	-15.53	27.75	46.00	-18.25			peak
2	542.1600	43.10	-13.24	29.86	46.00	-16.14			peak
3	619.7600	44.29	-12.92	31.37	46.00	-14.63			peak
4	665.3500	43.86	-12.24	31.62	46.00	-14.38			peak
5	822.4900	44.15	-10.44	33.71	46.00	-12.29			peak
6*	953.4400	45.07	-9.08	35.99	46.00	-10.01			peak

RESULT: PASS

Note: 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

2. The "Factor" value can be calculated automatically by software of measurement system.


RADIATED EMISSION TEST- (30MHZ-1GHZ)-HIGH CHANNEL-HORIZONTAL

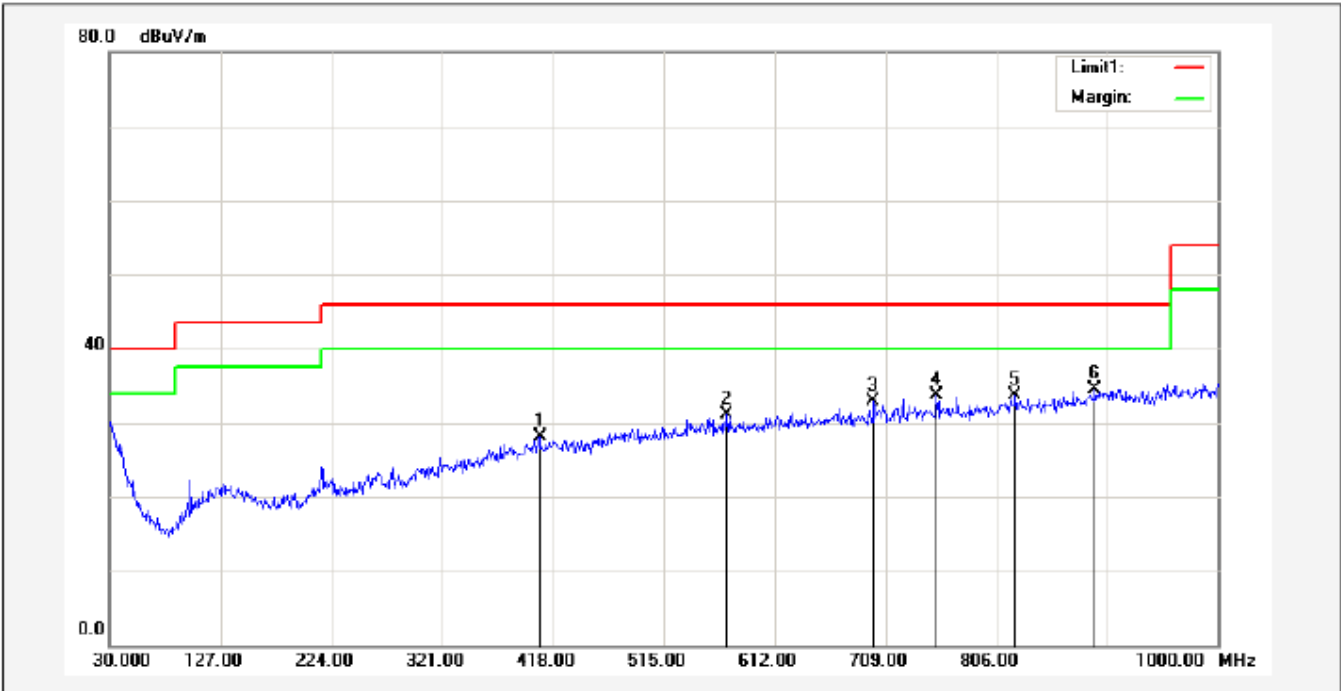

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (deg.)	Height (cm)	Remark
1	406.3600	43.91	-15.78	28.13	46.00	-17.87			peak
2	570.2900	44.05	-13.02	31.03	46.00	-14.97			peak
3	698.3300	44.87	-11.98	32.89	46.00	-13.11			peak
4	753.6200	44.90	-11.13	33.77	46.00	-12.23			peak
5	822.4900	44.20	-10.44	33.76	46.00	-12.24			peak
6*	892.3300	44.36	-9.88	34.48	46.00	-11.52			peak

RESULT: PASS

RADIATED EMISSION TEST- (30MHZ-1GHZ)-HIGH CHANNEL -VERTICAL

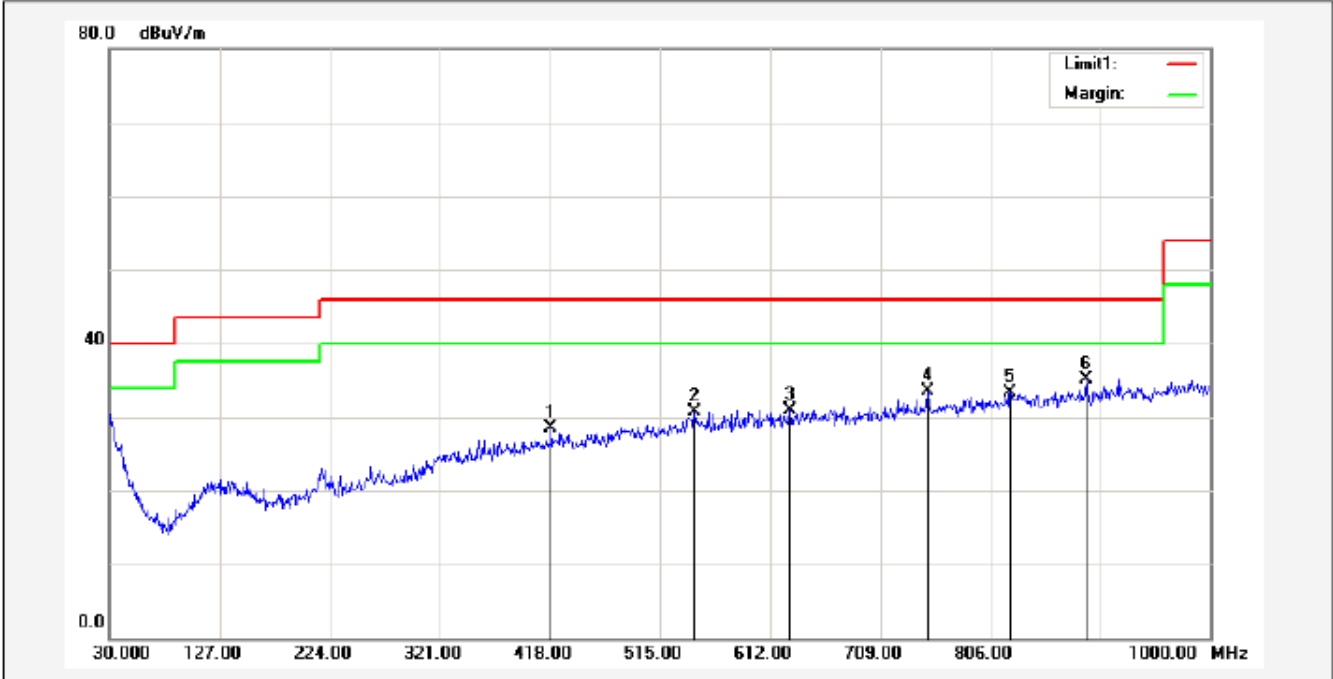

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (deg.)	Height (cm)	Remark
1	418.9700	43.88	-15.44	28.44	46.00	-17.56			peak
2	545.0700	43.85	-13.19	30.66	46.00	-15.34			peak
3	629.4600	43.52	-12.52	31.00	46.00	-15.00			peak
4	750.7100	44.68	-11.18	33.50	46.00	-12.50			peak
5	823.4600	43.70	-10.46	33.24	46.00	-12.76			peak
6*	890.3900	45.06	-9.90	35.16	46.00	-10.84			peak

RESULT: PASS

- Note:** 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.
 2. The “Factor” value can be calculated automatically by software of measurement system.


FOR BLE

RADIATED EMISSION BELOW 30MHZ

No emission found between lowest internal used/generated frequencies to 30MHz.

RADIATED EMISSION BELOW 1GHZ


RADIATED EMISSION TEST- (30MHZ-1GHZ)-LOW CHANNEL-HORIZONTAL

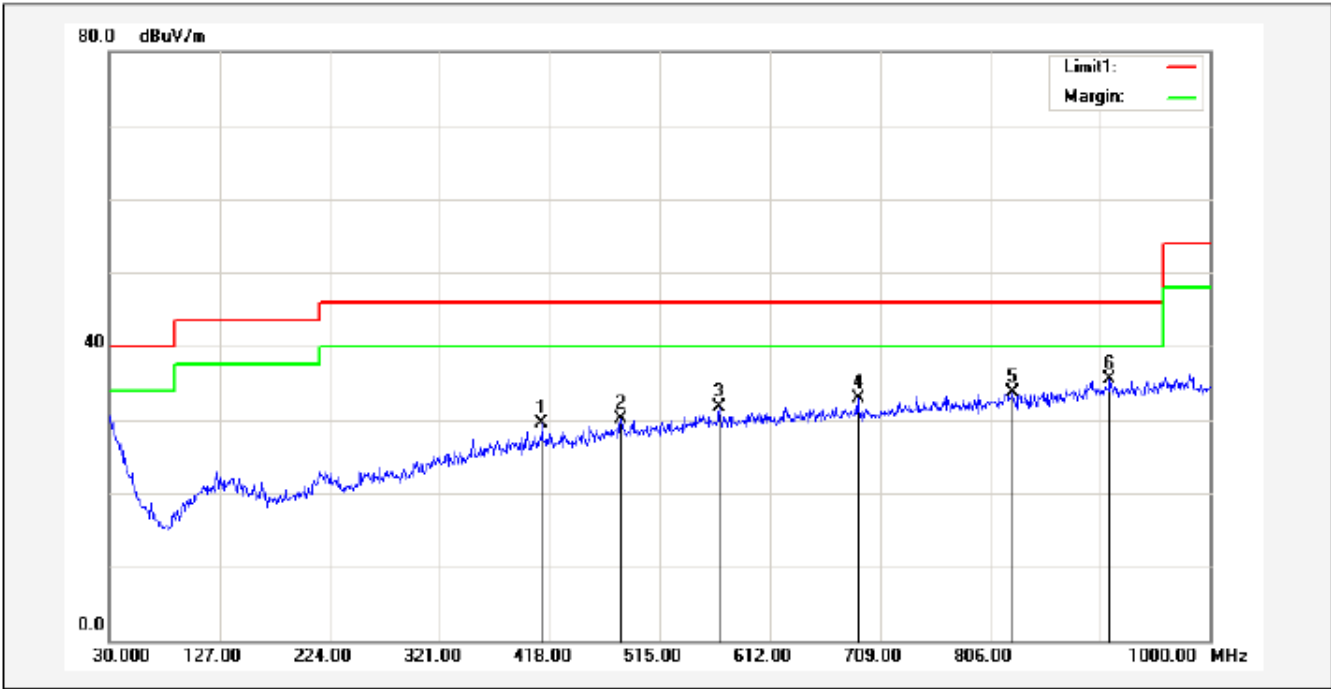

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (deg.)	Height (cm)	Remark
1	411.2100	45.02	-15.59	29.43	46.00	-16.57			peak
2	480.0800	44.42	-14.36	30.06	46.00	-15.94			peak
3	567.3800	44.71	-13.08	31.63	46.00	-14.37			peak
4	689.6000	45.16	-12.20	32.96	46.00	-13.04			peak
5	825.4000	44.26	-10.49	33.77	46.00	-12.23			peak
6*	911.7300	45.03	-9.55	35.48	46.00	-10.52			peak

RESULT: PASS

RADIATED EMISSION TEST- (30MHZ-1GHZ)-LOW CHANNEL -VERTICAL

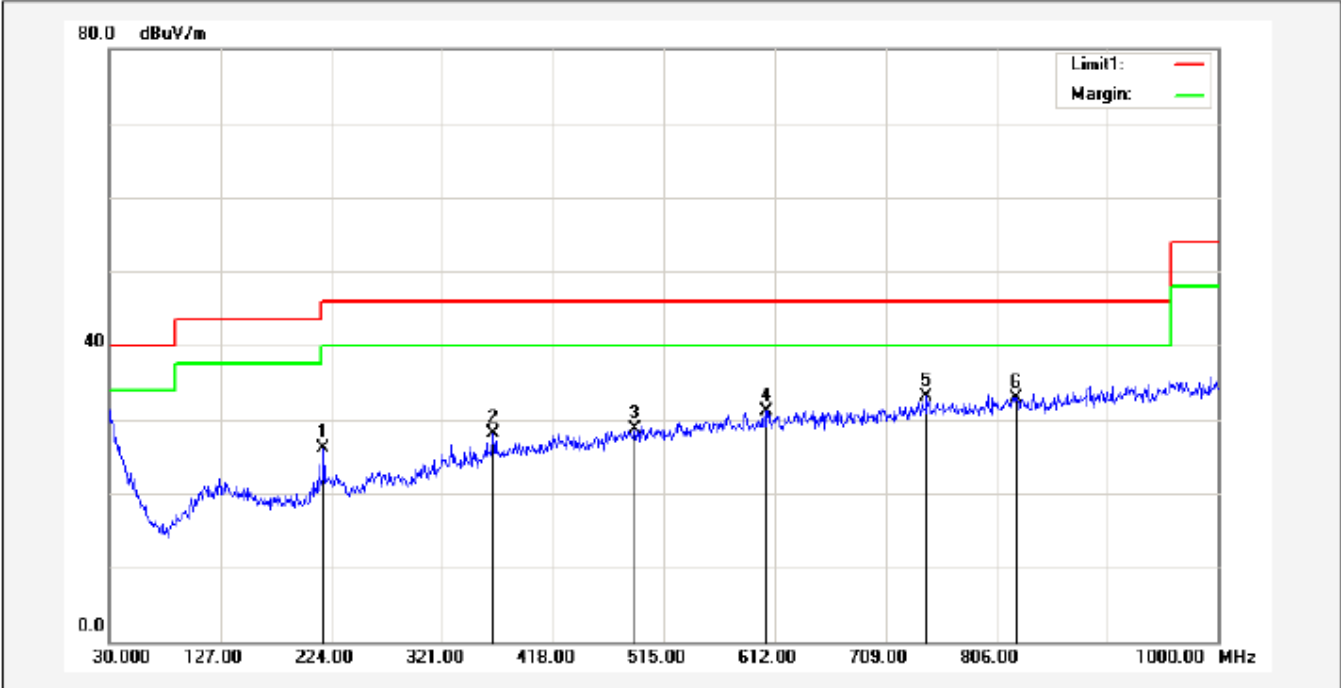


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (deg.)	Height (cm)	Remark
1	217.2100	46.78	-20.67	26.11	46.00	-19.89			peak
2	365.6200	45.41	-17.30	28.11	46.00	-17.89			peak
3	489.7800	43.00	-14.36	28.64	46.00	-17.36			peak
4	604.2400	43.92	-12.76	31.16	46.00	-14.84			peak
5*	744.8900	44.44	-11.27	33.17	46.00	-12.83			peak
6	823.4600	43.40	-10.46	32.94	46.00	-13.06			peak

RESULT: PASS

Note: 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

2. The "Factor" value can be calculated automatically by software of measurement system.


RADIATED EMISSION TEST- (30MHZ-1GHZ)-MIDDLE CHANNEL-HORIZONTAL

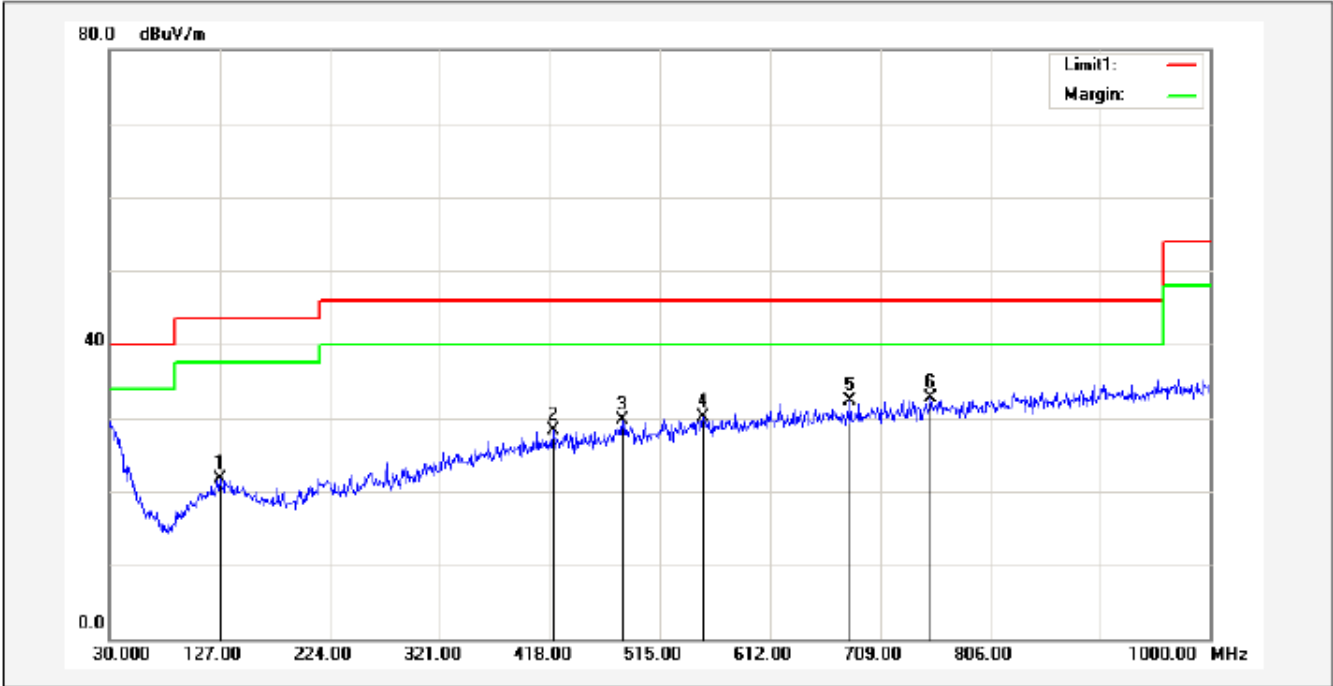

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (deg.)	Height (cm)	Remark
1	127.0000	42.60	-20.87	21.73	43.50	-21.77			peak
2	420.9100	43.69	-15.44	28.25	46.00	-17.75			peak
3	482.0200	43.99	-14.36	29.63	46.00	-16.37			peak
4	552.8300	43.31	-13.15	30.16	46.00	-15.84			peak
5	682.8100	44.64	-12.37	32.27	46.00	-13.73			peak
6*	753.6200	43.90	-11.13	32.77	46.00	-13.23			peak

RESULT: PASS

RADIATED EMISSION TEST- (30MHZ-1GHZ)- MIDDLE CHANNEL -VERTICAL

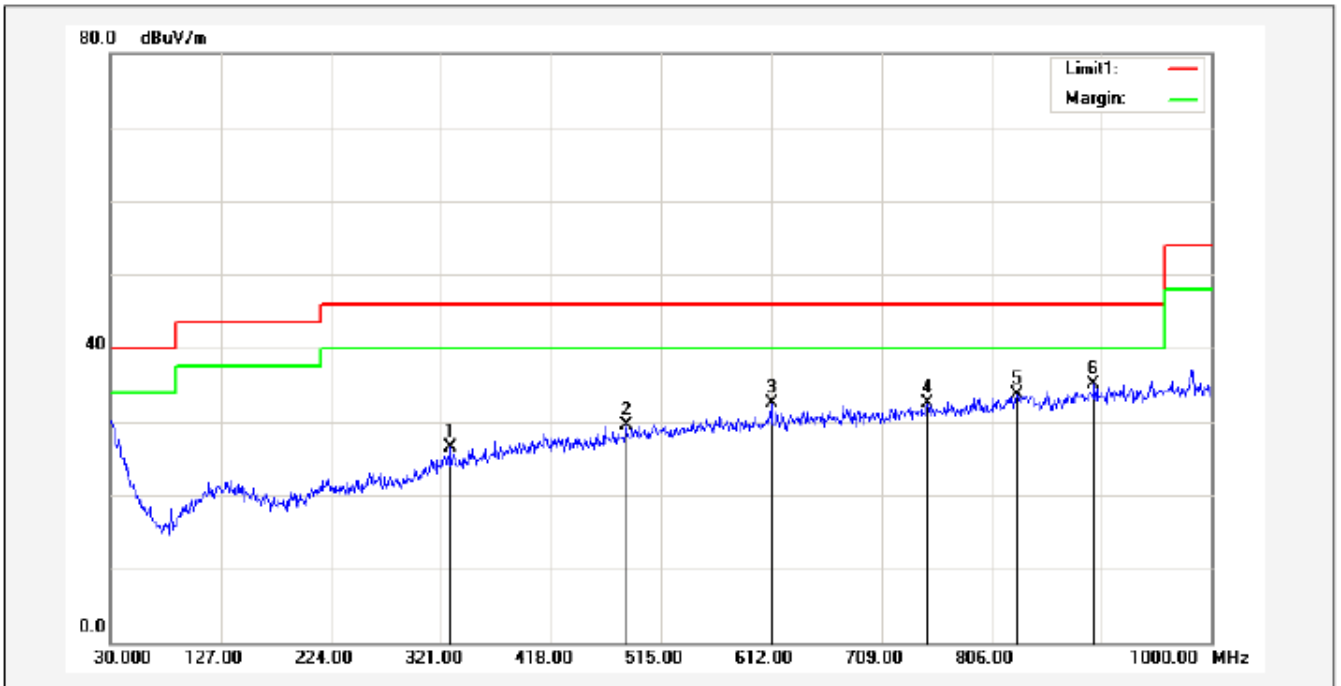


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (deg.)	Height (cm)	Remark
1	328.7600	44.99	-18.47	26.52	46.00	-19.48			peak
2	483.9600	43.95	-14.36	29.59	46.00	-16.41			peak
3	612.0000	45.27	-12.67	32.60	46.00	-13.40			peak
4	749.7400	43.69	-11.19	32.50	46.00	-13.50			peak
5	828.3100	44.29	-10.55	33.74	46.00	-12.26			peak
6*	896.2100	44.88	-9.86	35.02	46.00	-10.98			peak

RESULT: PASS

Note: 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

2. The "Factor" value can be calculated automatically by software of measurement system.


RADIATED EMISSION TEST- (30MHZ-1GHZ)-HIGH CHANNEL-HORIZONTAL

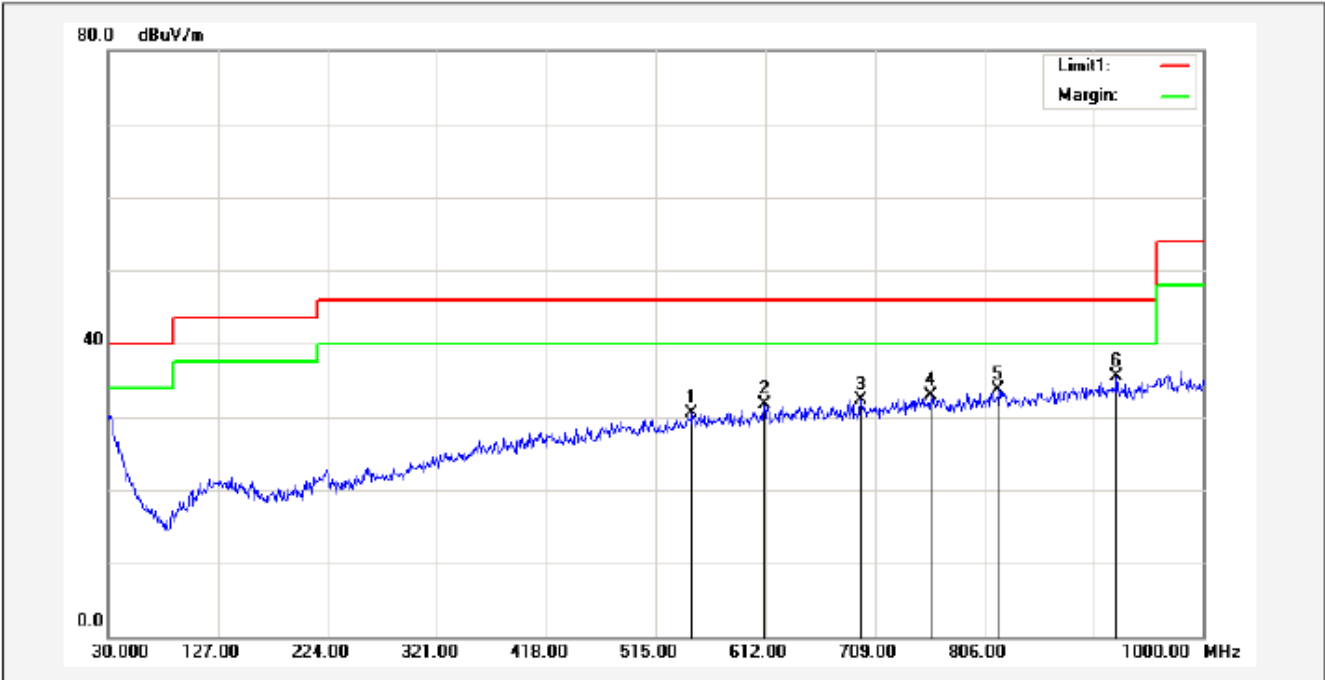

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (deg.)	Height (cm)	Remark
1	547.0100	43.65	-13.15	30.50	46.00	-15.50			peak
2	611.0300	44.35	-12.64	31.71	46.00	-14.29			peak
3	696.3900	44.41	-12.03	32.38	46.00	-13.62			peak
4	758.4700	43.87	-11.05	32.82	46.00	-13.18			peak
5	818.6100	44.25	-10.45	33.80	46.00	-12.20			peak
6*	923.3700	44.89	-9.44	35.45	46.00	-10.55			peak

RESULT: PASS

RADIATED EMISSION TEST- (30MHZ-1GHZ)-HIGH CHANNEL -VERTICAL

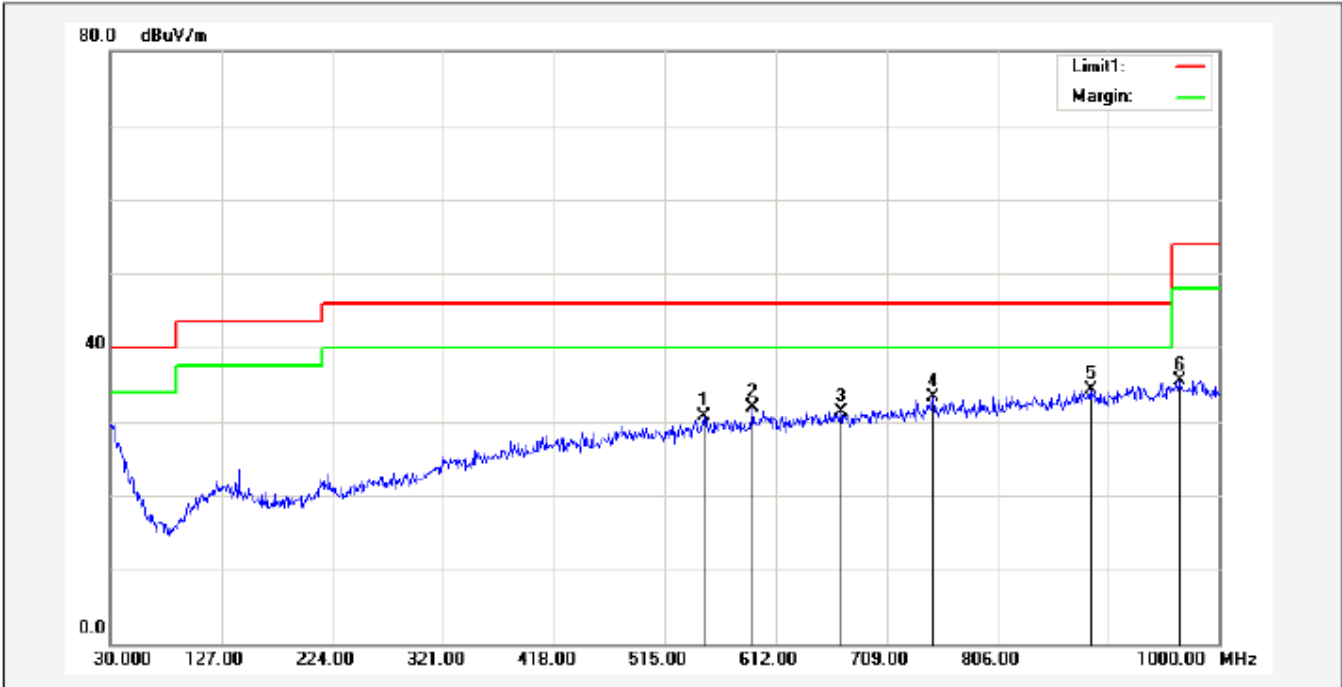

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (deg.)	Height (cm)	Remark
1	548.9500	43.84	-13.12	30.72	46.00	-15.28			peak
2	591.6300	44.92	-13.01	31.91	46.00	-14.09			peak
3	669.2300	43.49	-12.14	31.35	46.00	-14.65			peak
4	749.7400	44.53	-11.19	33.34	46.00	-12.66			peak
5*	887.4800	44.27	-9.92	34.35	46.00	-11.65			peak
6	965.0800	44.39	-8.81	35.58	54.00	-18.42			peak


RESULT: PASS

Note: 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

2. The “Factor” value can be calculated automatically by software of measurement system.

**RADIATED EMISSION ABOVE 1GHZ
 FOR BR/EDR**


RADIATED EMISSION TEST- (ABOVE 1GHZ)-LOW CHANNEL-HORIZONTAL

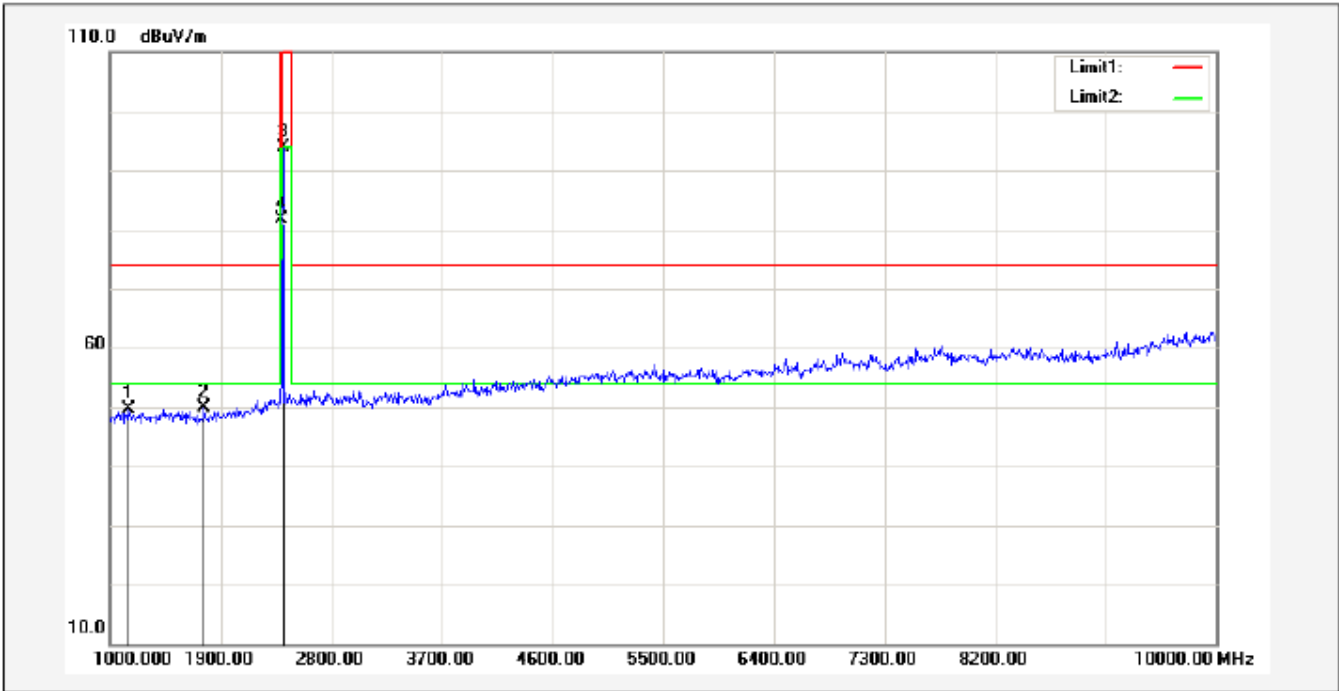

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (deg.)	Height (cm)	Remark
1	1144.000	57.72	-8.00	49.72	74.00	-24.28			peak
2	1765.000	56.20	-6.35	49.85	74.00	-24.15			peak
3*	2402.000	96.68	-2.79	93.89	114.00	-20.11			peak
4*	2402.000	86.29	-2.39	83.90	94.00	-20.10			AVG

RESULT: PASS


RADIATED EMISSION TEST- (ABOVE 1GHZ)-LOW CHANNEL- VERTICAL

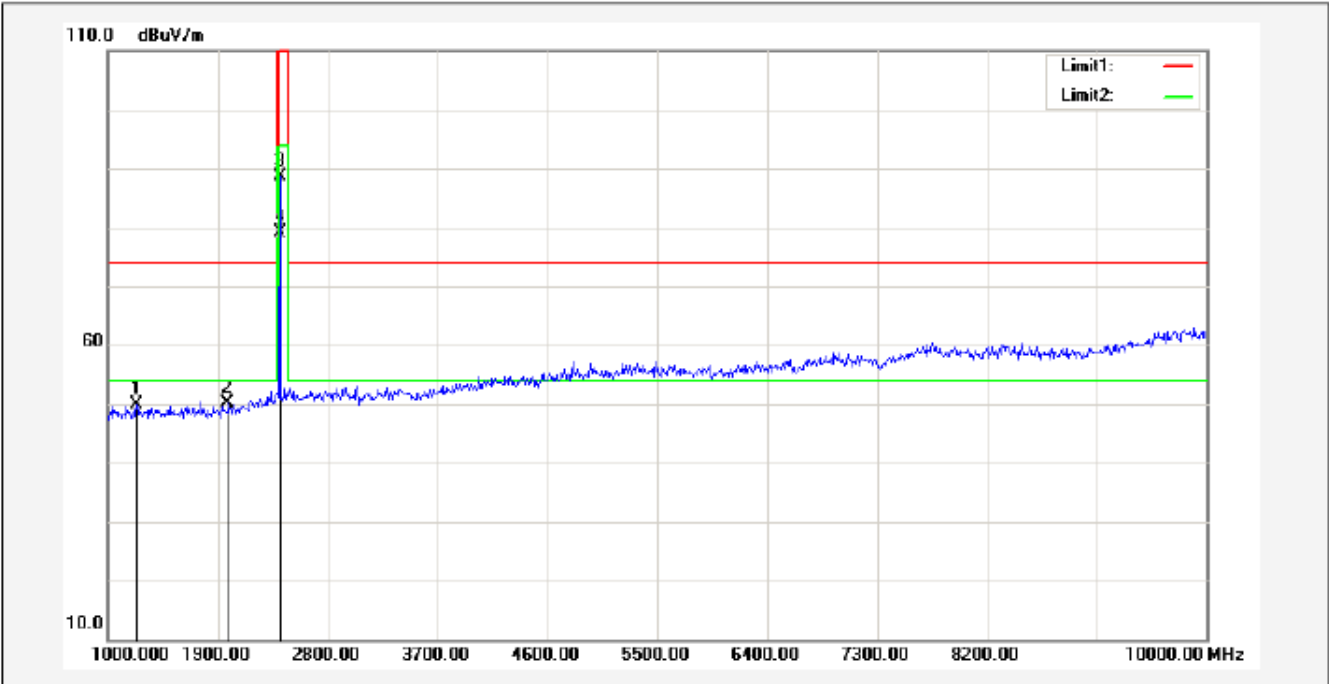

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (deg.)	Height (cm)	Remark
1	1234.000	57.43	-7.67	49.76	74.00	-24.24			peak
2*	1981.000	55.28	-5.12	50.16	74.00	-23.84			peak
3	2402.000	91.48	-2.79	88.69	114.00	-25.31			peak
4*	2402.000	81.68	-2.81	78.87	94.00	-15.13			AVG

RESULT: PASS


RADIATED EMISSION TEST- (ABOVE 1GHZ)-MIDDLE CHANNEL-HORIZONTAL

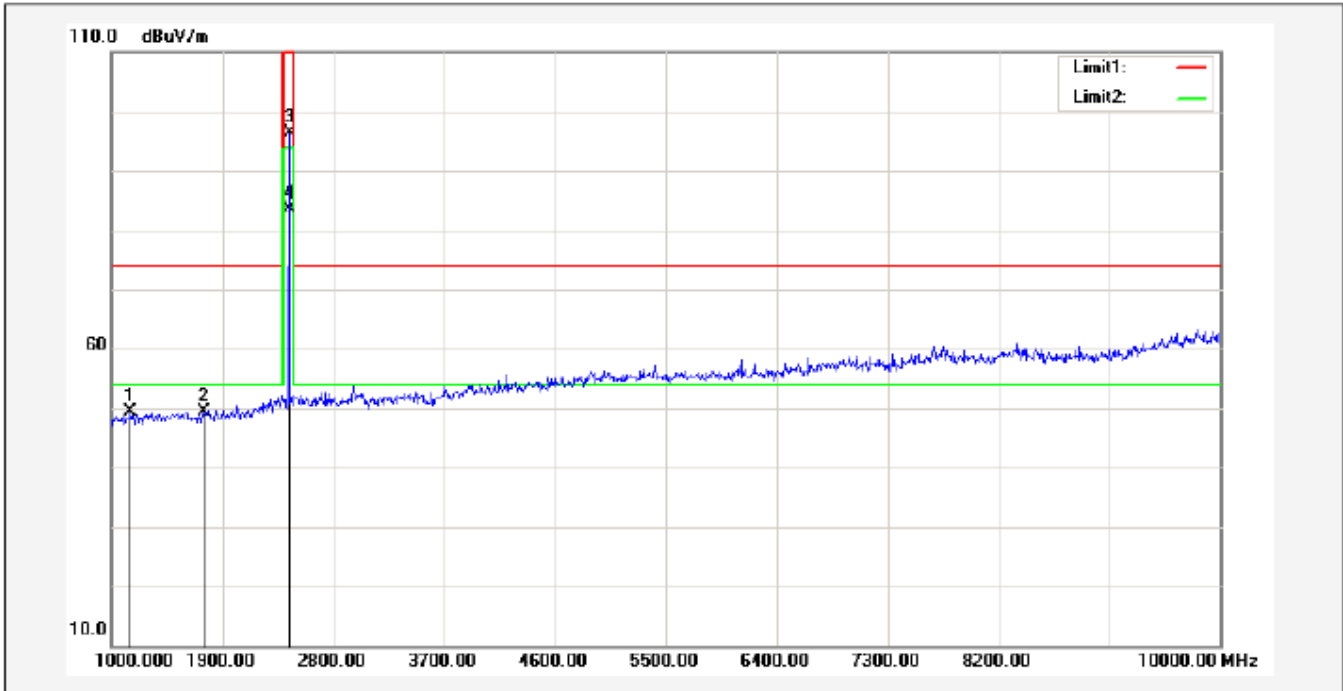

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (deg.)	Height (cm)	Remark
1	1153.000	57.47	-7.97	49.50	74.00	-24.50			peak
2	1747.000	55.75	-6.38	49.37	74.00	-24.63			peak
3*	2441.000	98.90	-2.59	96.31	114.00	-17.69			peak
4*	2441.000	88.71	-2.58	86.13	94.00	-7.87			AVG

RESULT: PASS


RADIATED EMISSION TEST- (ABOVE 1GHZ)-MIDDLE CHANNEL- VERTICAL

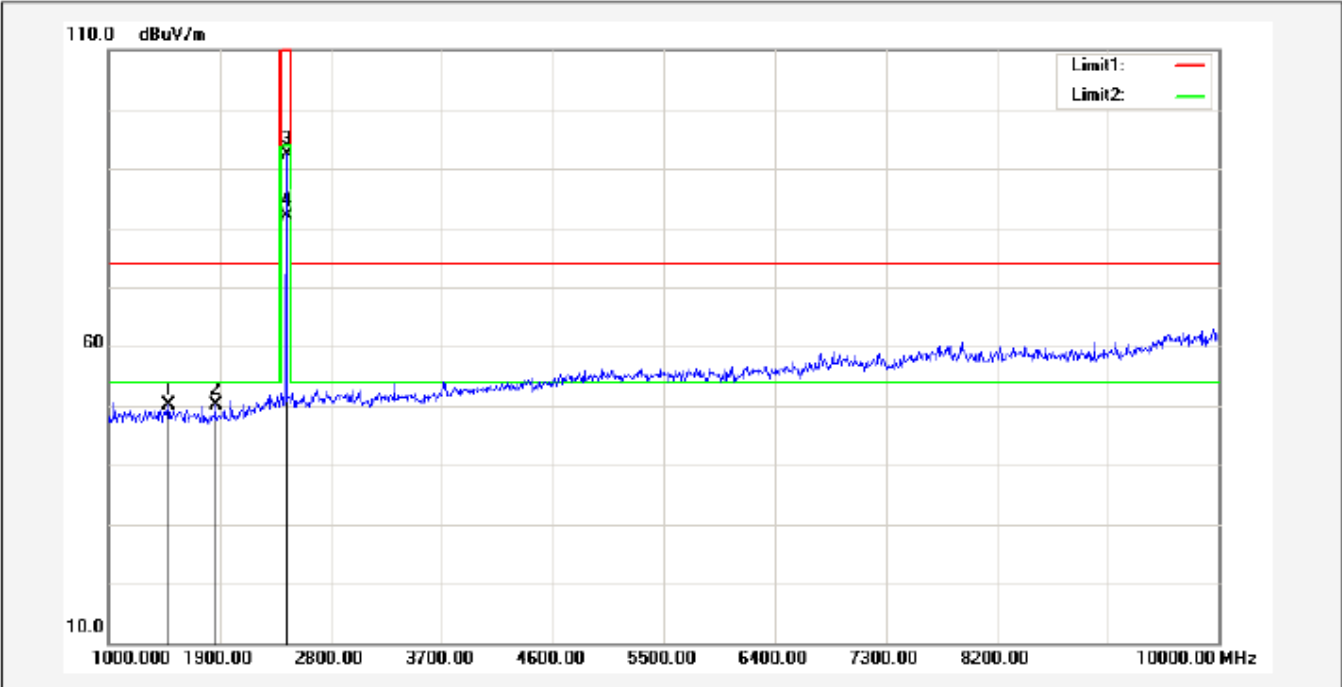

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (deg.)	Height (cm)	Remark
1	1486.000	57.02	-6.91	50.11	74.00	-23.89			peak
2	1864.000	56.02	-5.86	50.16	74.00	-23.84			peak
3*	2441.000	94.96	-2.59	92.37	114.00	-21.63			peak
4*	2441.000	84.16	-2.58	81.58	94.00	-12.42			AVG


RESULT: PASS

RADIATED EMISSION TEST- (ABOVE 1GHZ)-HIGH CHANNEL-HORIZONTAL

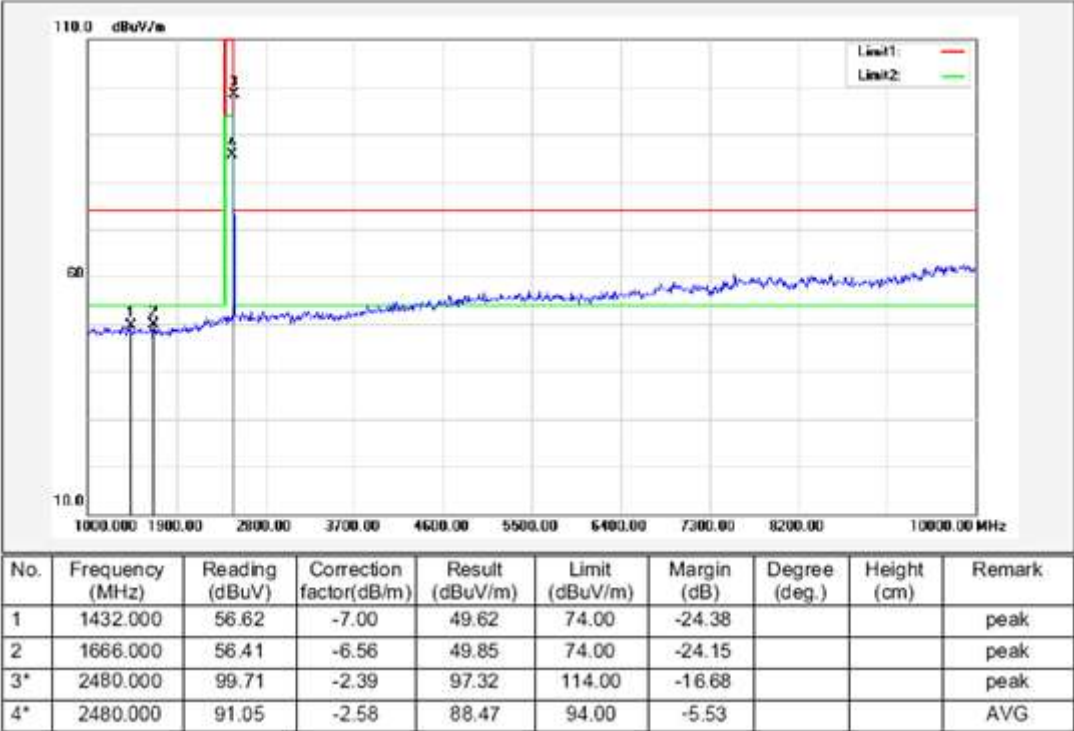

RESULT: PASS

RADIATED EMISSION TEST- (ABOVE 1GHZ)-HIGH CHANNEL- VERTICAL

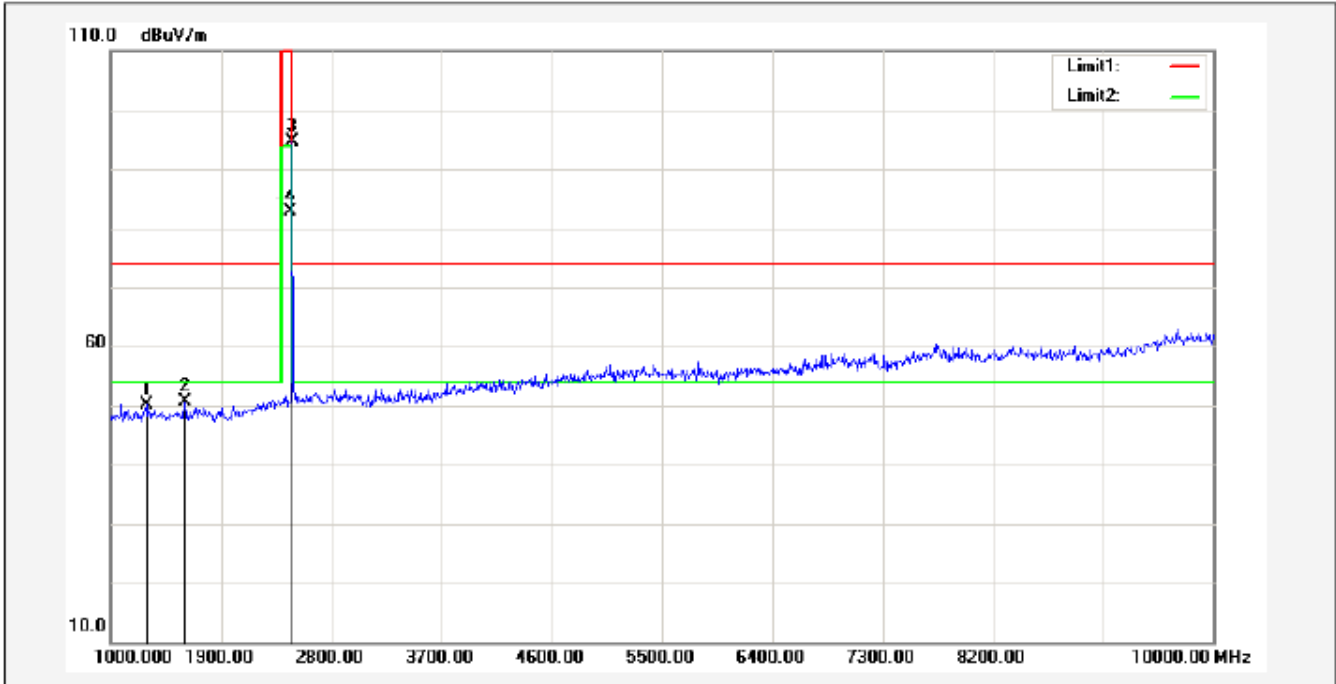

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (deg.)	Height (cm)	Remark
1	1288.000	57.57	-7.47	50.10	74.00	-23.90			peak
2	1603.000	57.22	-6.69	50.53	74.00	-23.47			peak
3*	2480.000	96.98	-2.39	94.59	114.00	-19.41			peak
4*	2480.000	87.14	-2.58	84.56	94.00	-9.44			AVG

RESULT: PASS

Note: 10~25GHz at least have 20dB margin. No recording in the test report.
 Factor=Antenna Factor + Cable loss - Amplifier gain, Margin=Measurement-Limit.
 The "Factor" value can be calculated automatically by software of measurement system.

Field strength of the fundamental signal

Peak value


Frequency	Reading Level	Factor	Measurement	Limit	Over	Antenna
(MHz)	(dBuv)	(dB/m)	(dBuv/m)	(dBuv/m)	(dB)	Polarization
2402	96.68	-2.79	93.89	114	-20.11	Horizontal
2402	91.48	-2.79	88.69	114	-25.31	Vertical
2441	98.90	-2.59	96.31	114	-17.69	Horizontal
2441	94.96	-2.59	92.37	114	-21.63	Vertical
2480	99.71	-2.39	97.32	114	-16.68	Horizontal
2480	91	-2.39	94.59	114	-19.41	Vertical

Average value

Frequency	Reading Level	Factor	Measurement	Limit	Over	Antenna
(MHz)	(dBuv)	(dB/m)	(dBuv/m)	(dBuv/m)	(dB)	Polarization
2402	86.29	-2.39	83.90	94	-20.10	Horizontal
2402	81.68	-2.81	78.87	94	-15.13	Vertical
2441	88.71	-2.58	86.13	94	-7.87	Horizontal
2441	84.16	-2.58	81.58	94	-12.42	Vertical
2480	91.05	-2.58	88.47	94	-5.53	Horizontal
2480	87.14	-2.58	84.56	94	-9.44	Vertical

FOR BLE


RADIATED EMISSION TEST- (ABOVE 1GHZ)-LOW CHANNEL-HORIZONTAL

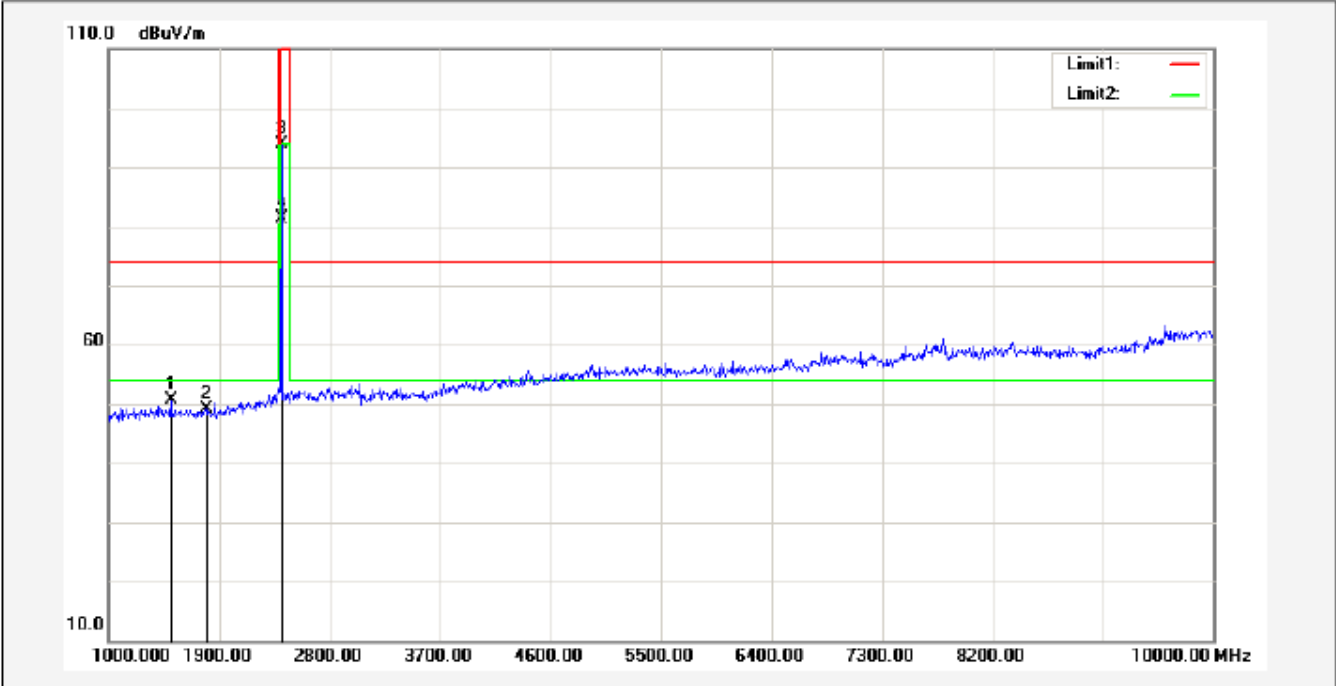

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (deg.)	Height (cm)	Remark
1	1504.000	57.56	-6.87	50.69	74.00	-23.31			peak
2	1792.000	55.46	-6.29	49.17	74.00	-24.83			peak
3*	2402.000	96.63	-2.79	93.84	114.00	-20.16			peak
4*	2402.000	85.53	-2.81	82.72	94.00	-11.28			AVG

RESULT: PASS


RADIATED EMISSION TEST- (ABOVE 1GHZ)-LOW CHANNEL- VERTICAL

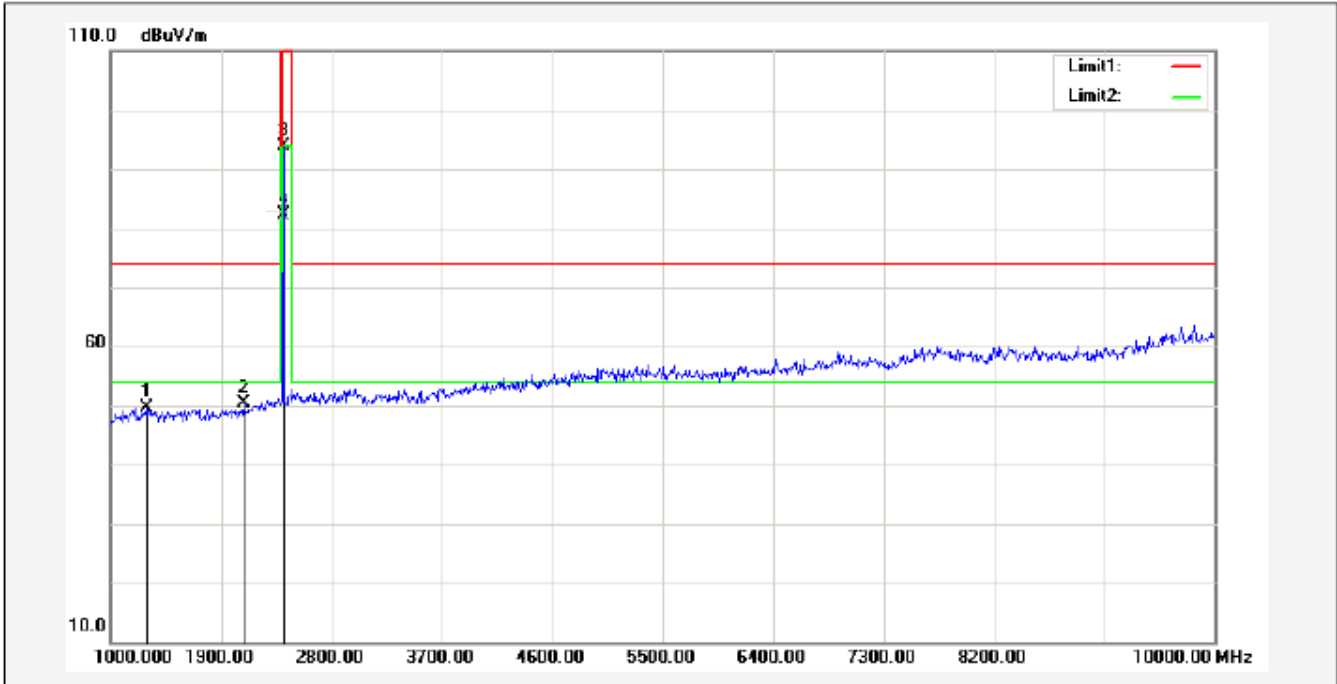

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (deg.)	Height (cm)	Remark
1	1297.000	57.10	-7.44	49.66	74.00	-24.34			peak
2	2080.000	54.83	-4.56	50.27	74.00	-23.73			peak
3*	2402.000	96.55	-2.79	93.76	114.00	-20.24			peak
4*	2402.000	86.67	-2.81	83.86	94.00	-10.14			AVG

RESULT: PASS


RADIATED EMISSION TEST- (ABOVE 1GHZ)-MIDDLE CHANNEL-HORIZONTAL

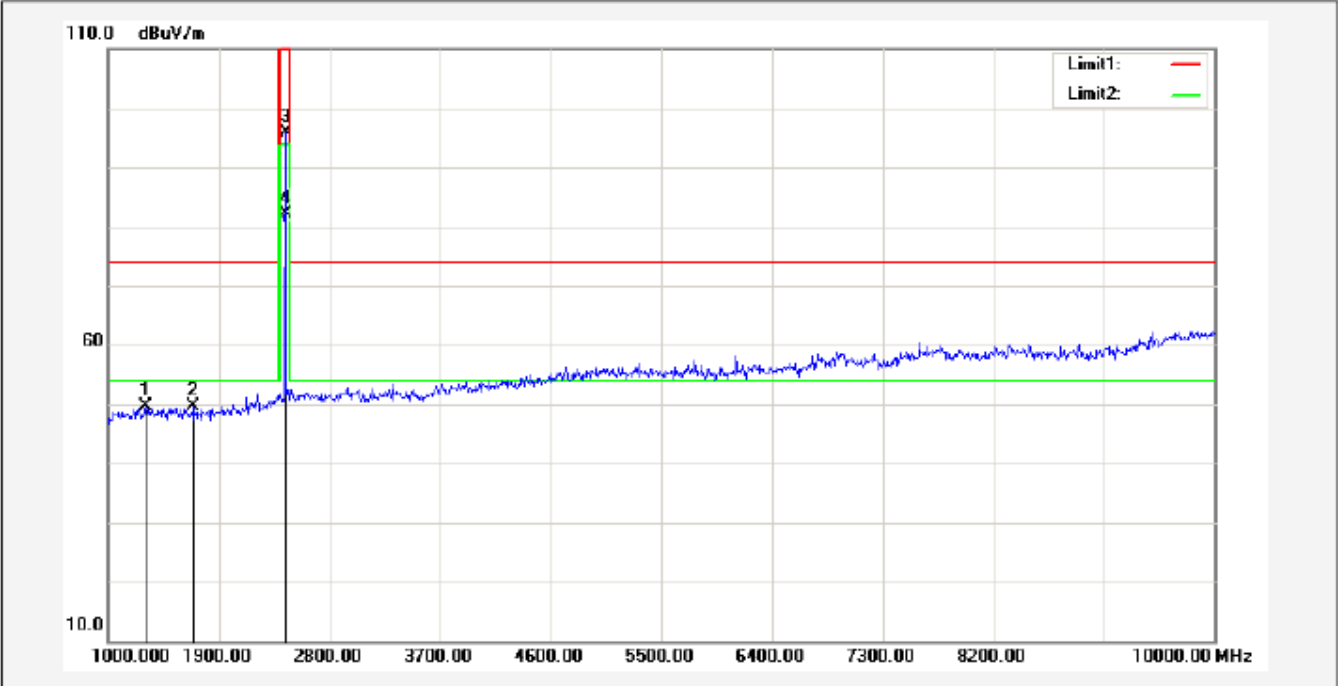

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (deg.)	Height (cm)	Remark
1	1306.000	57.02	-7.40	49.62	74.00	-24.38			peak
2	1693.000	56.19	-6.50	49.69	74.00	-24.31			peak
3*	2440.000	98.52	-2.59	95.93	114.00	-18.07			peak
4*	2440.000	86.82	-2.58	84.24	94.00	-9.76			AVG

RESULT: PASS


RADIATED EMISSION TEST- (ABOVE 1GHZ)-MIDDLE CHANNEL- VERTICAL

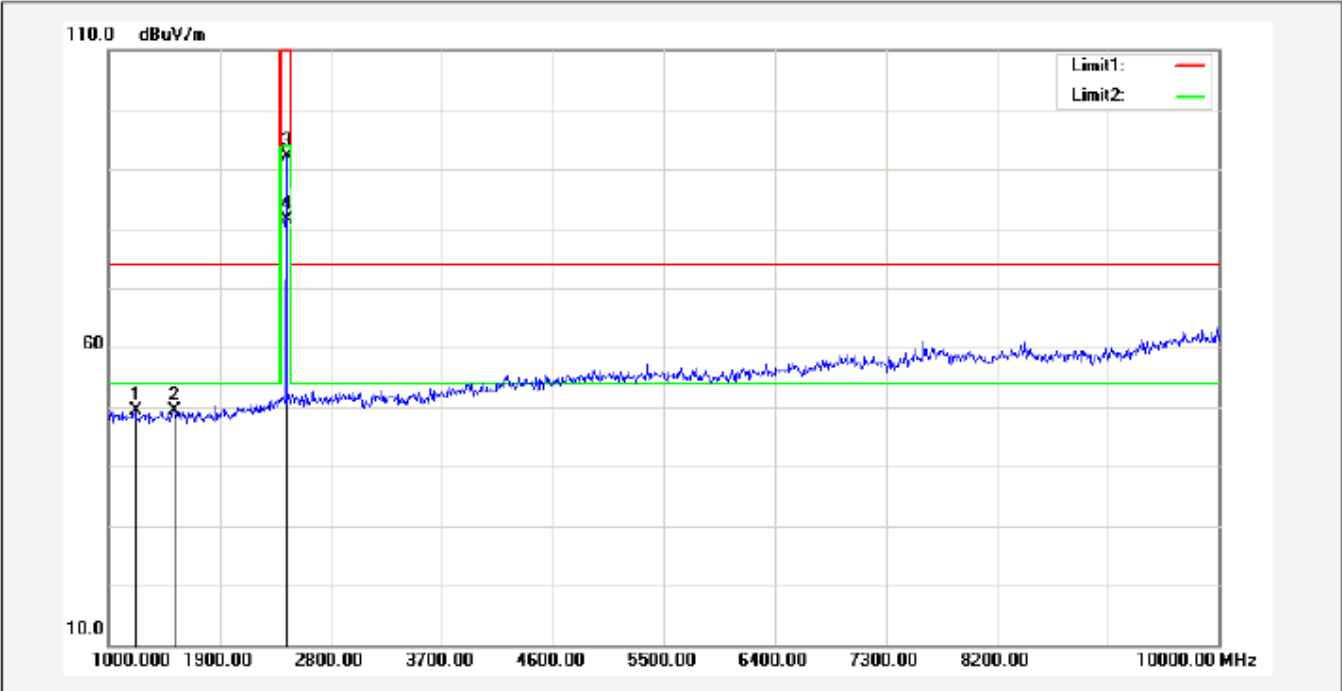

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (deg.)	Height (cm)	Remark
1	1216.000	57.18	-7.73	49.45	74.00	-24.55			peak
2	1531.000	56.10	-6.82	49.28	74.00	-24.72			peak
3*	2440.000	94.74	-2.59	92.15	114.00	-21.85			peak
4*	2440.000	83.16	-2.58	80.58	94.00	-13.42			AVG


RESULT: PASS

RADIATED EMISSION TEST- (ABOVE 1GHZ)-HIGH CHANNEL-HORIZONTAL

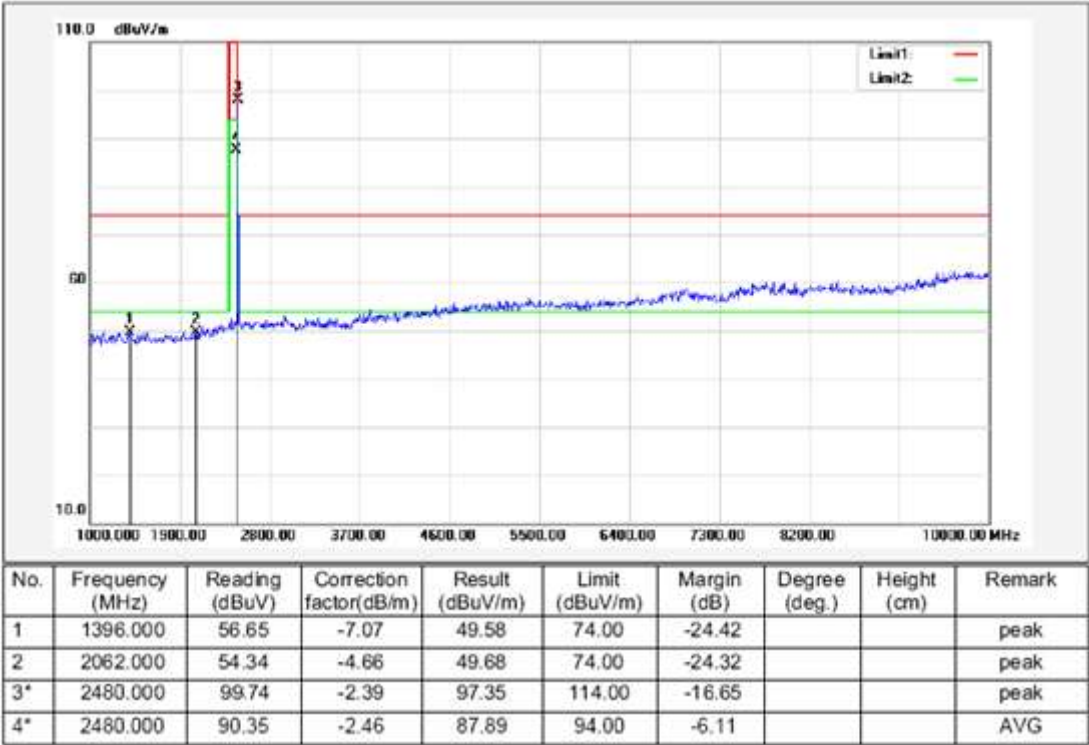

RESULT: PASS

RADIATED EMISSION TEST- (ABOVE 1GHZ)-HIGH CHANNEL- VERTICAL

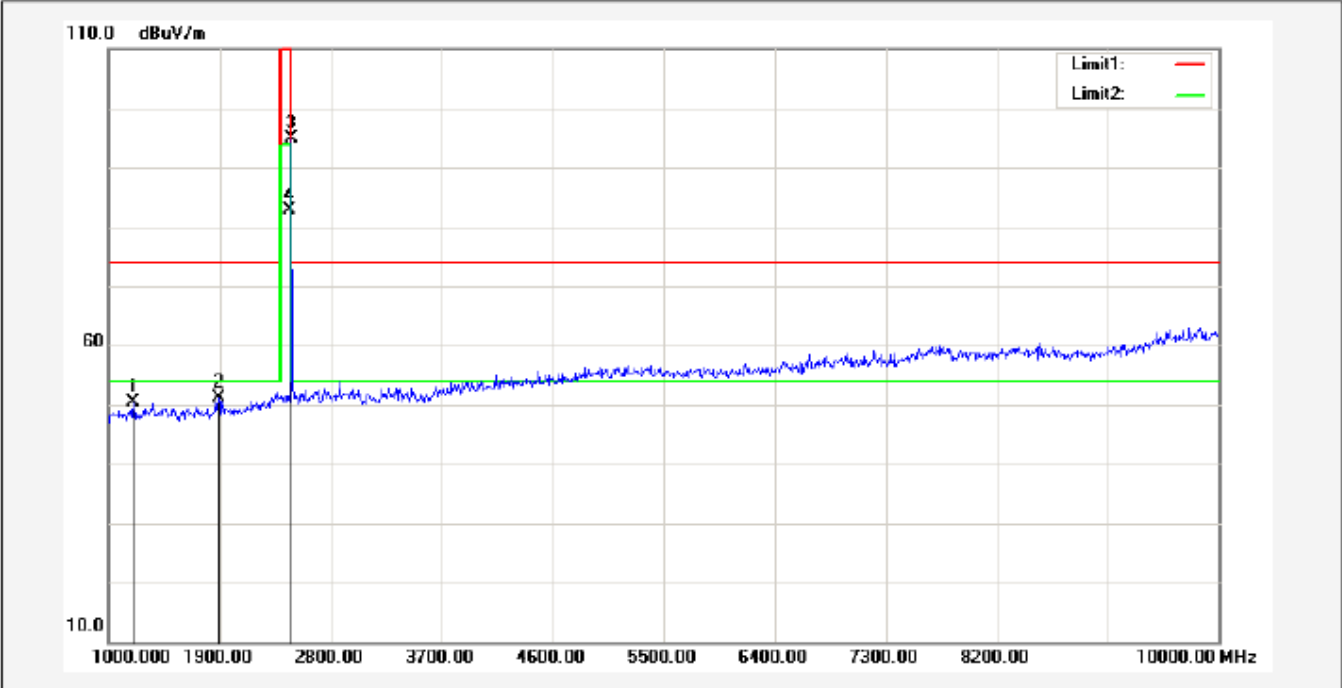

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (deg.)	Height (cm)	Remark
1	1198.000	58.08	-7.80	50.28	74.00	-23.72			peak
2	1891.000	56.73	-5.69	51.04	74.00	-22.96			peak
3*	2480.000	97.28	-2.39	94.89	114.00	-19.11			peak
4*	2480.000	87.02	-2.39	84.63	94.00	-9.37			AVG

RESULT: PASS

Note: 10~25GHz at least have 20dB margin. No recording in the test report.
 Factor=Antenna Factor + Cable loss - Amplifier gain, Margin=Measurement-Limit.
 The "Factor" value can be calculated automatically by software of measurement system.

Field strength of the fundamental signal**Peak value**

Frequency	Reading Level	Factor	Measurement	Limit	Over	Antenna
(MHz)	(dBuv)	(dB/m)	(dBuv/m)	(dBuv/m)	(dB)	Polarization
2402	96.63	-2.79	93.84	114	-20.16	Horizontal
2402	96.55	-2.79	93.76	114	-20.24	Vertical
2440	98.52	-2.59	95.93	114	-18.07	Horizontal
2440	94.74	-2.59	92.15	114	-21.85	Vertical
2480	99.74	-2.39	97.35	114	-16.65	Horizontal
2480	97.28	-2.39	94.89	114	-19.11	Vertical

Average value

Frequency	Reading Level	Factor	Measurement	Limit	Over	Antenna
(MHz)	(dBuv)	(dB/m)	(dBuv/m)	(dBuv/m)	(dB)	Polarization
2402	85.53	-2.81	82.72	94	-11.28	Horizontal
2402	86.67	-2.81	83.86	94	-10.14	Vertical
2440	86.82	-2.58	84.24	94	-9.76	Horizontal
2440	83.16	-2.58	80.58	94	-13.42	Vertical
2480	90.35	-2.46	87.89	94	-6.11	Horizontal
2480	87.02	-2.39	84.63	94	-9.37	Vertical

9. BAND EDGE EMISSION

9.1. MEASUREMENT PROCEDURE

1The EUT operates at hopping-off test mode. The lowest or highest channels are tested to verify the largest transmission and spurious emissions power at the continuous transmission mode.


2Max hold the trace of the setp 1,and the EUT operates at hopping-on test mode to verify the largest spurious emissions power.

3Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission: (a) PEAK: RBW=VBW=1.5MHz / Sweep=AUTO

(b) AVERAGE: RBW=1.5MHz ; VBW=1/on time(1KHz) / Sweep=AUTO


9.2 TEST SETUP

RADIATED EMISSION TEST SETUP

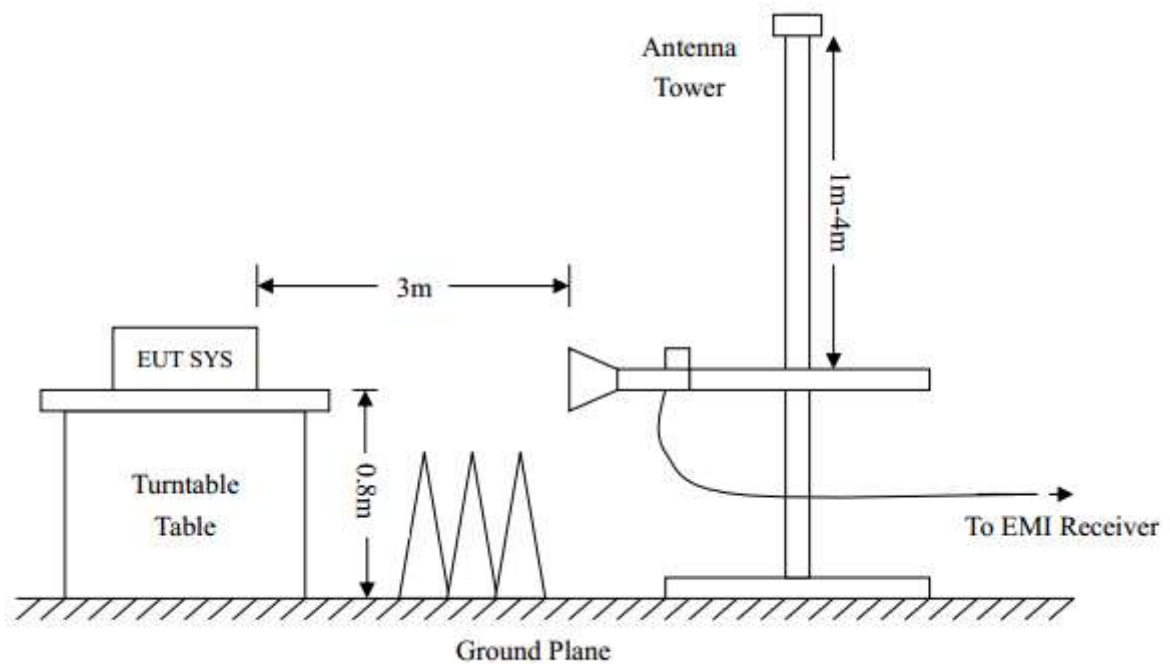


9.3 RADIATED TEST RESULT
(Worst modulation: GFSK)
FOR BR/EDR

TEST PLOT OF BAND EDGE FOR LOW CHANNEL-Horizontal

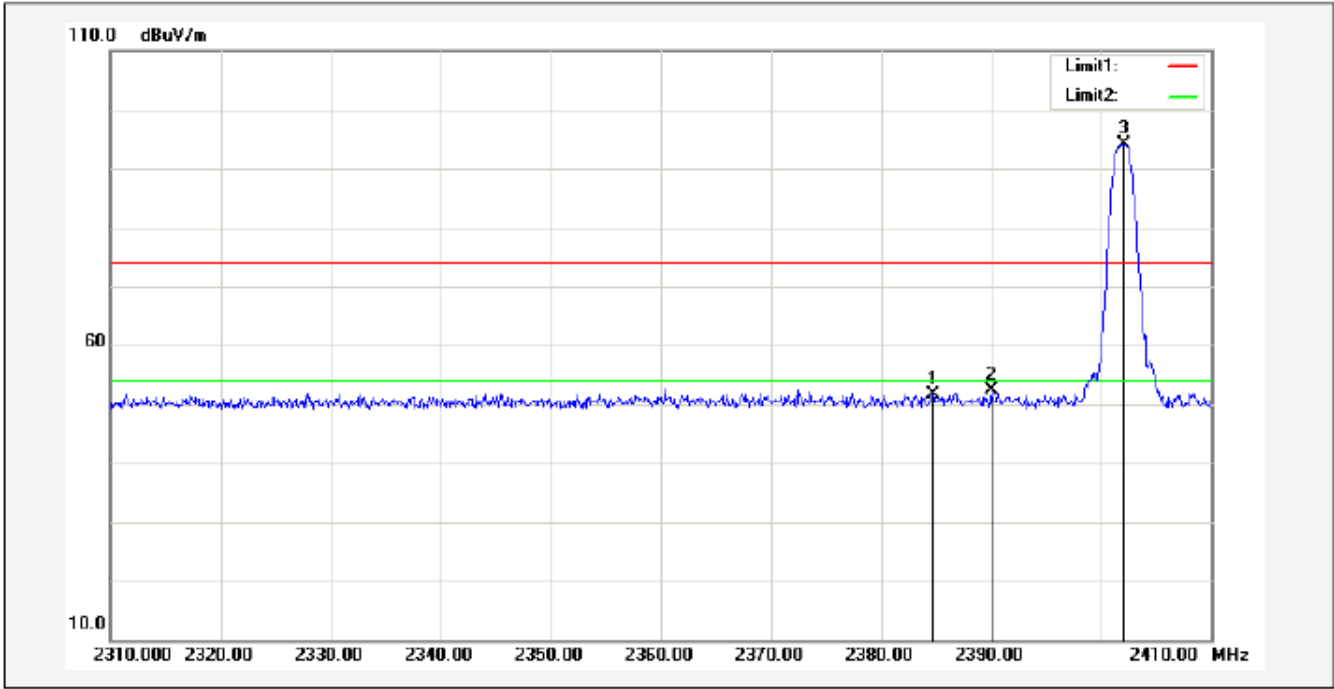


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (deg.)	Height (cm)	Remark
1	2384.700	54.64	-2.89	51.75	74.00	-22.25			peak
2	2390.000	55.13	-2.86	52.27	74.00	-21.73			peak
3*	2402.000	96.85	-2.80	94.05	74.00	20.05			peak

TEST PLOT OF BAND EDGE FOR LOW CHANNEL –Vertical

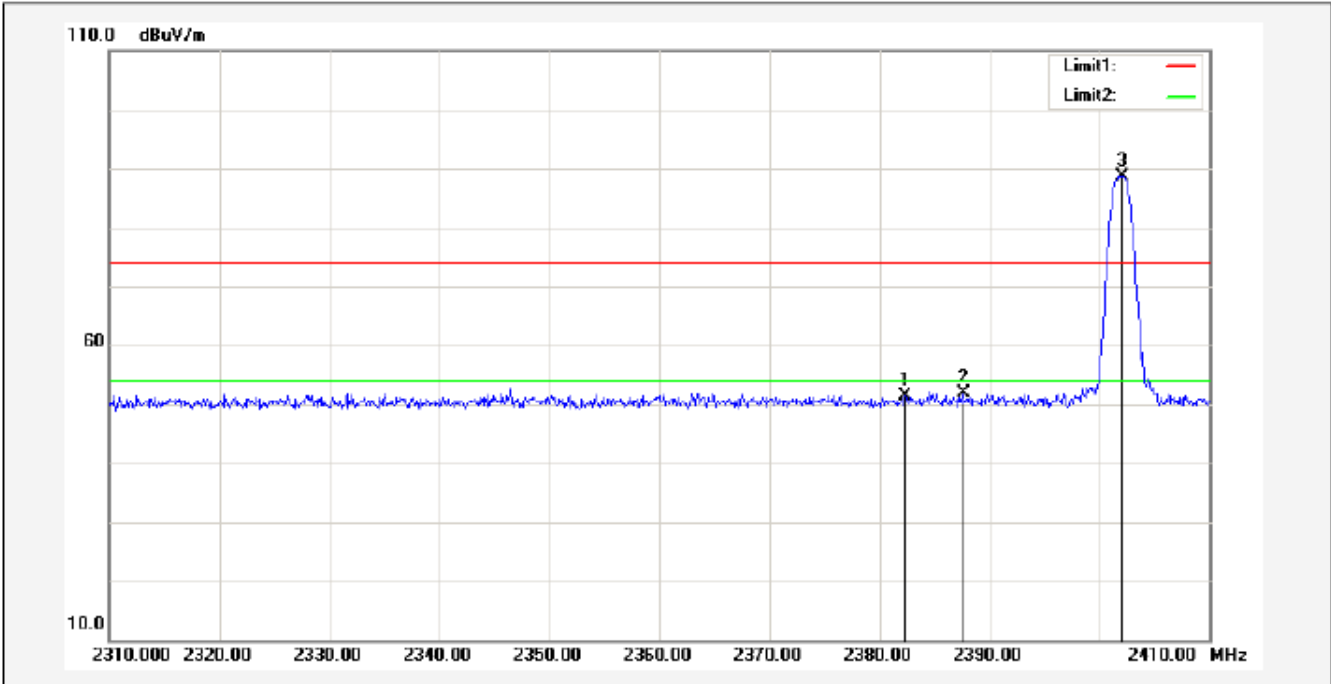


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (deg.)	Height (cm)	Remark
1	2382.300	54.36	-2.90	51.46	74.00	-22.54			peak
2	2387.600	54.68	-2.88	51.80	74.00	-22.20			peak
3*	2402.000	91.40	-2.80	88.60	74.00	14.60			peak

TEST PLOT OF BAND EDGE FOR HIGH CHANNEL -Horizontal

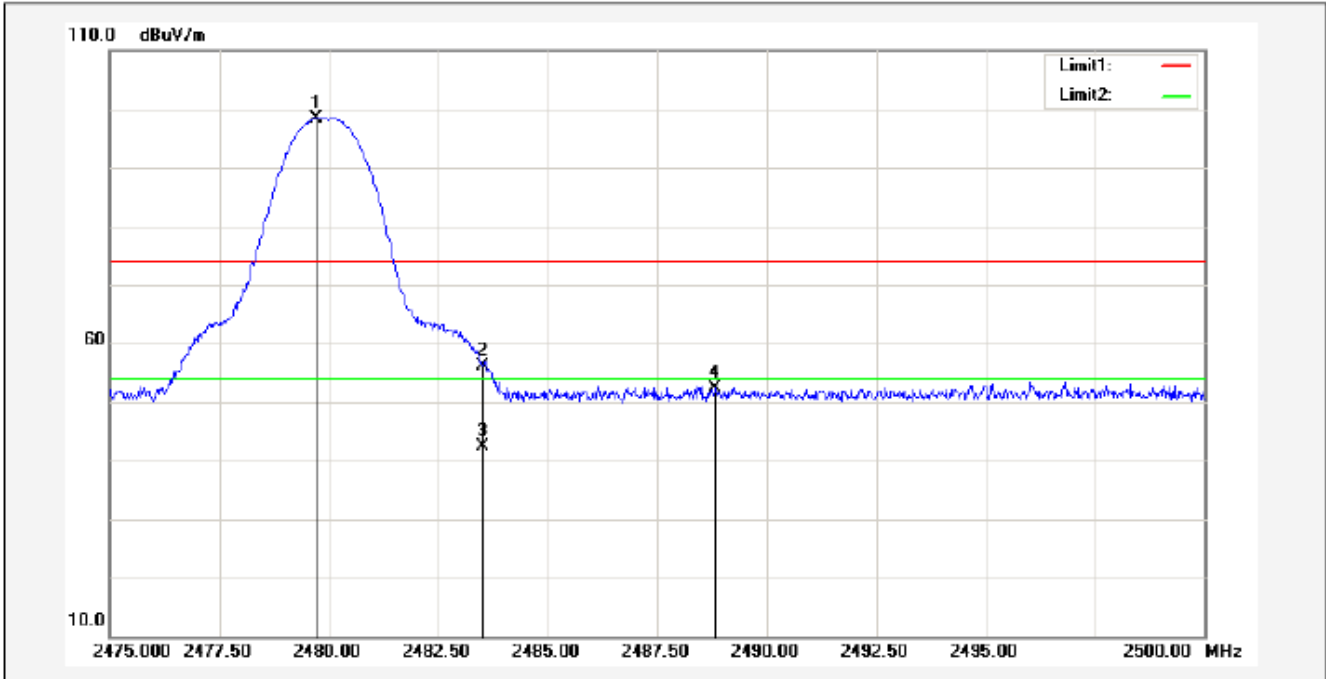

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (deg.)	Height (cm)	Remark
1*	2479.725	100.77	-2.37	98.40	74.00	24.40			peak
2	2483.500	58.57	-2.35	56.22	74.00	-17.78			peak
3	2483.500	44.71	-2.35	42.36	54.00	-11.64			AVG
4	2488.825	54.63	-2.32	52.31	74.00	-21.69			peak

TEST PLOT OF BAND EDGE FOR HIGH CHANNEL-Vertical

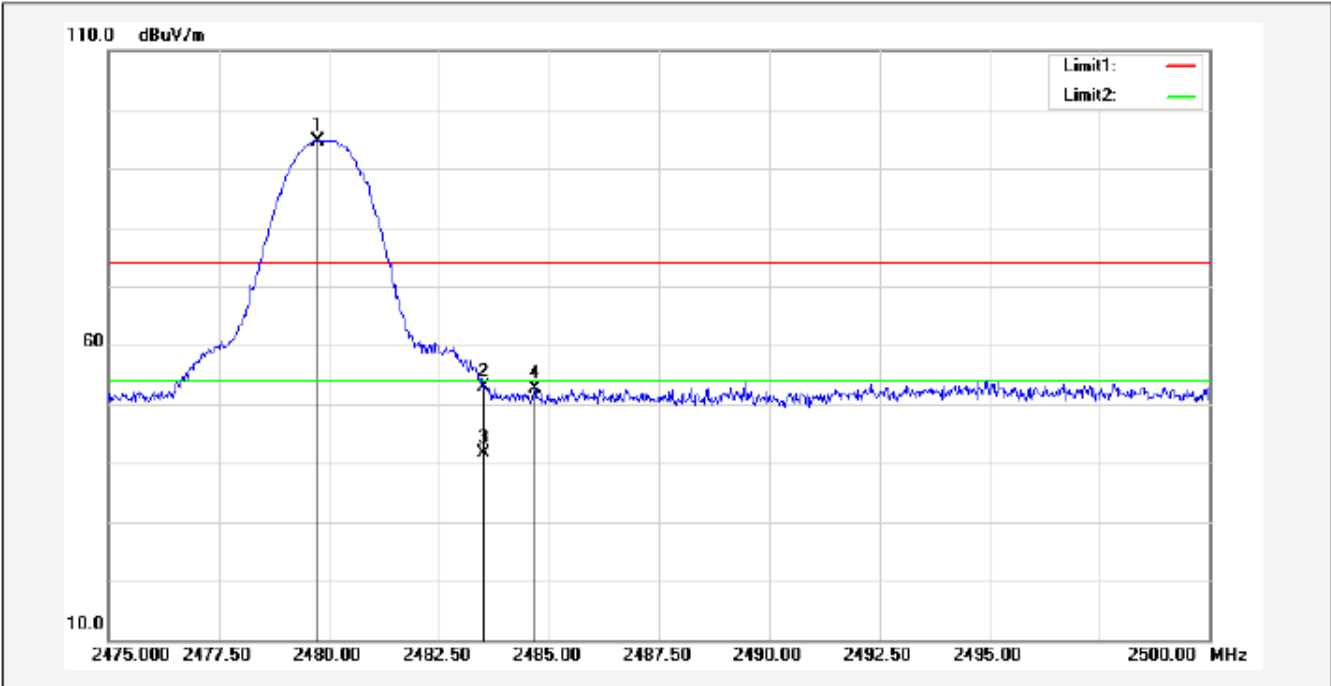

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (deg.)	Height (cm)	Remark
1*	2479.750	97.07	-2.37	94.70	74.00	20.70			peak
2	2483.500	55.31	-2.35	52.96	74.00	-21.04			peak
3	2483.500	44.03	-2.35	41.68	54.00	-12.32			AVG
4	2484.675	54.86	-2.34	52.52	74.00	-21.48			peak

RESULT: PASS

Note: The other modes radiation emission have enough 20dB margin.


Factor=Antenna Factor + Cable loss - Amplifier gain, Over=Measure-Limit.

The "Factor" value can be calculated automatically by software of measurement system.

Hopping on mode and Hopping off mode have been tested,but only worst case reported.


FOR BLE

TEST PLOT OF BAND EDGE FOR LOW CHANNEL-Horizontal

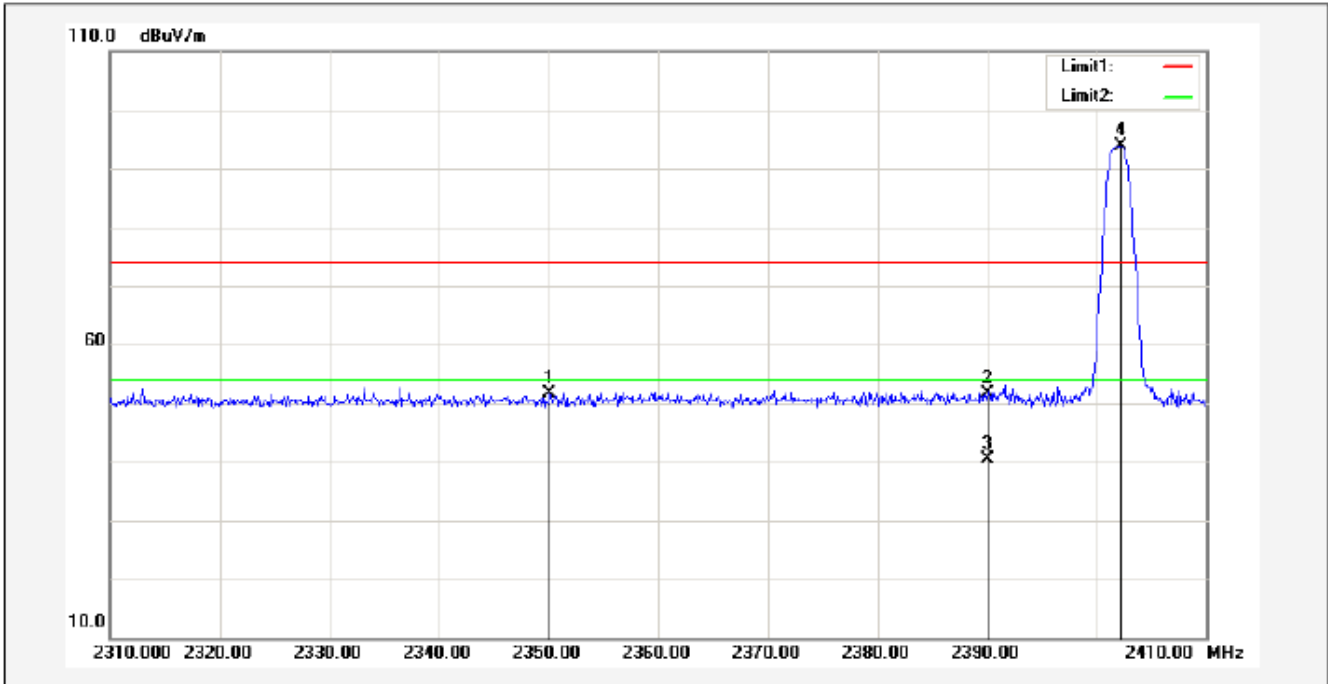


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (deg.)	Height (cm)	Remark
1	2350.100	54.74	-3.08	51.66	74.00	-22.34			peak
2	2390.000	54.47	-2.86	51.61	74.00	-22.39			peak
3	2390.000	43.12	-2.86	40.26	54.00	-13.74			AVG
4*	2402.200	96.60	-2.80	93.80	74.00	19.80			peak

TEST PLOT OF BAND EDGE FOR LOW CHANNEL –Vertical

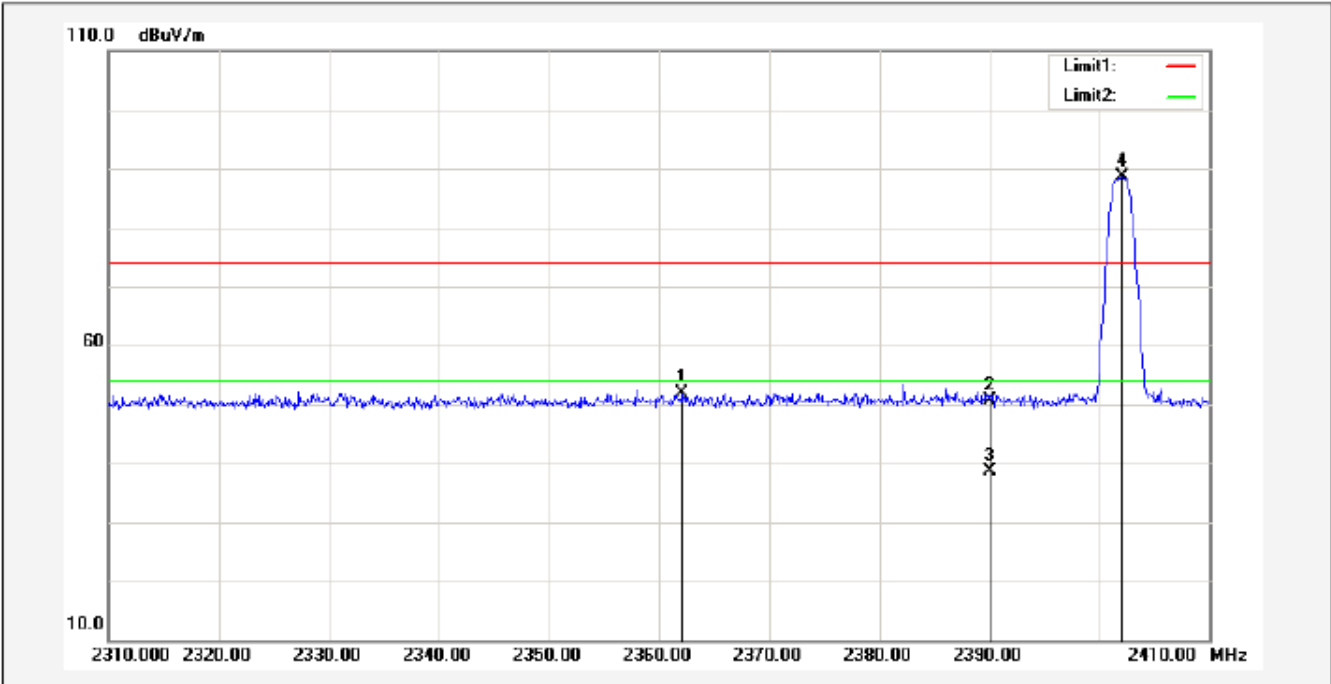


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (deg.)	Height (cm)	Remark
1	2362.100	54.91	-3.02	51.89	74.00	-22.11			peak
2	2390.000	53.48	-2.86	50.62	74.00	-23.38			peak
3	2390.000	41.54	-2.86	38.68	54.00	-15.32			AVG
4*	2402.000	91.31	-2.80	88.51	74.00	14.51			peak

TEST PLOT OF BAND EDGE FOR HIGH CHANNEL -Horizontal

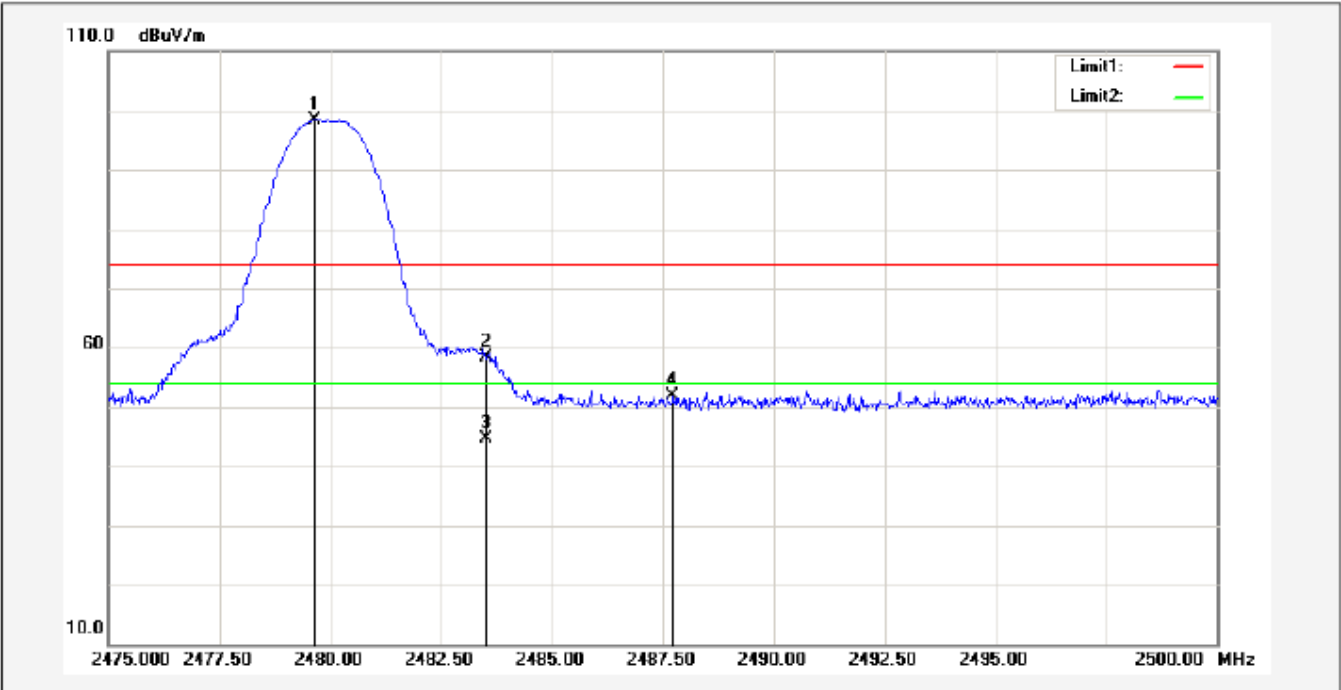

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (deg.)	Height (cm)	Remark
1*	2479.650	100.67	-2.37	98.30	74.00	24.30			peak
2	2483.500	60.70	-2.35	58.35	74.00	-15.65			peak
3	2483.500	46.87	-2.35	44.52	54.00	-9.48			AVG
4	2487.725	54.12	-2.33	51.79	74.00	-22.21			peak

TEST PLOT OF BAND EDGE FOR HIGH CHANNEL-Vertical

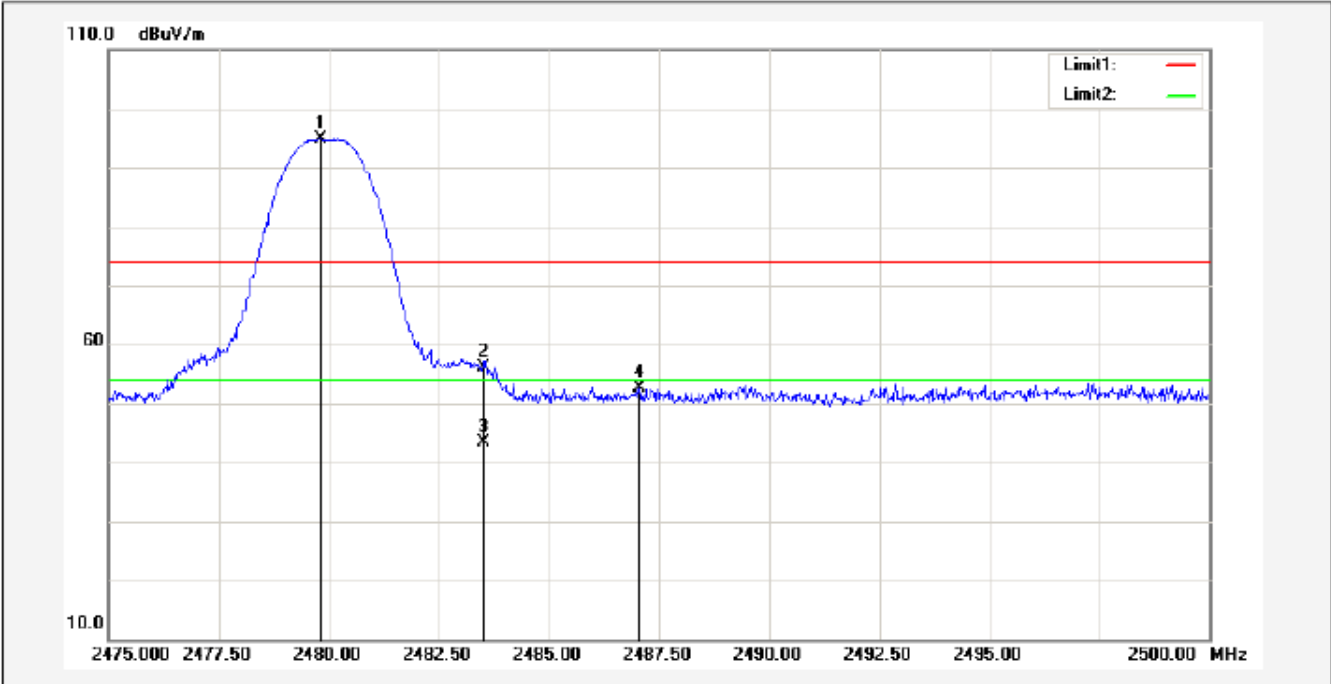

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (deg.)	Height (cm)	Remark
1*	2479.825	97.15	-2.37	94.78	74.00	20.78			peak
2	2483.500	58.56	-2.35	56.21	74.00	-17.79			peak
3	2483.500	45.61	-2.35	43.26	54.00	-10.74			AVG
4	2487.050	54.89	-2.33	52.56	74.00	-21.44			peak

RESULT: PASS

Note: The other modes radiation emission have enough 20dB margin.

Factor=Antenna Factor + Cable loss - Amplifier gain, Over=Measure-Limit.

The "Factor" value can be calculated automatically by software of measurement system.


10. 20DB BANDWIDTH

10.1. MEASUREMENT PROCEDURE

1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
2. Set the EUT Work on the top, the middle and the bottom operation frequency individually.
3. Set Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hoping channel
 RBW ≥ 1% of the 20 dB bandwidth, VBW ≥ RBW; Sweep = auto; Detector function = peak
4. Set SPA Trace 1 Max hold, then View.

10.2. TEST SET-UP

(BLOCK DIAGRAM OF CONFIGURATION)

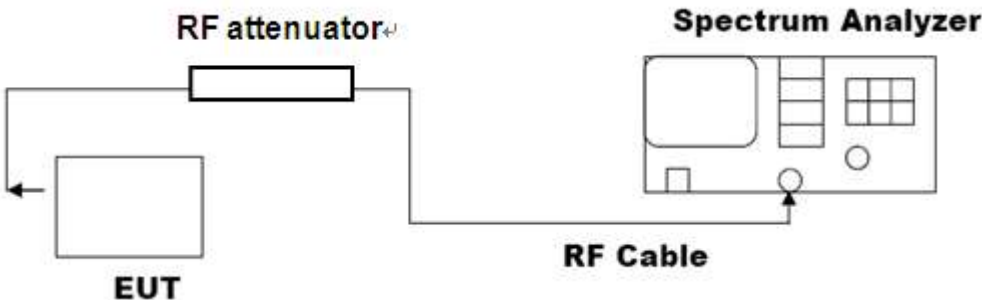


Note: The EUT has been used temporary antenna connector for testing.

10.3. LIMITS AND MEASUREMENT RESULTS


FOR BR/EDR

BLUETOOTH 1MBPS LIMITS AND MEASUREMENT RESULT			
Applicable Limits	Measurement Result		
	Test Data (MHz)		Criteria
N/A	Low Channel	1.097	PASS
	Middle Channel	1.068	PASS
	High Channel	1.079	PASS


TEST PLOT OF BANDWIDTH FOR LOW CHANNEL

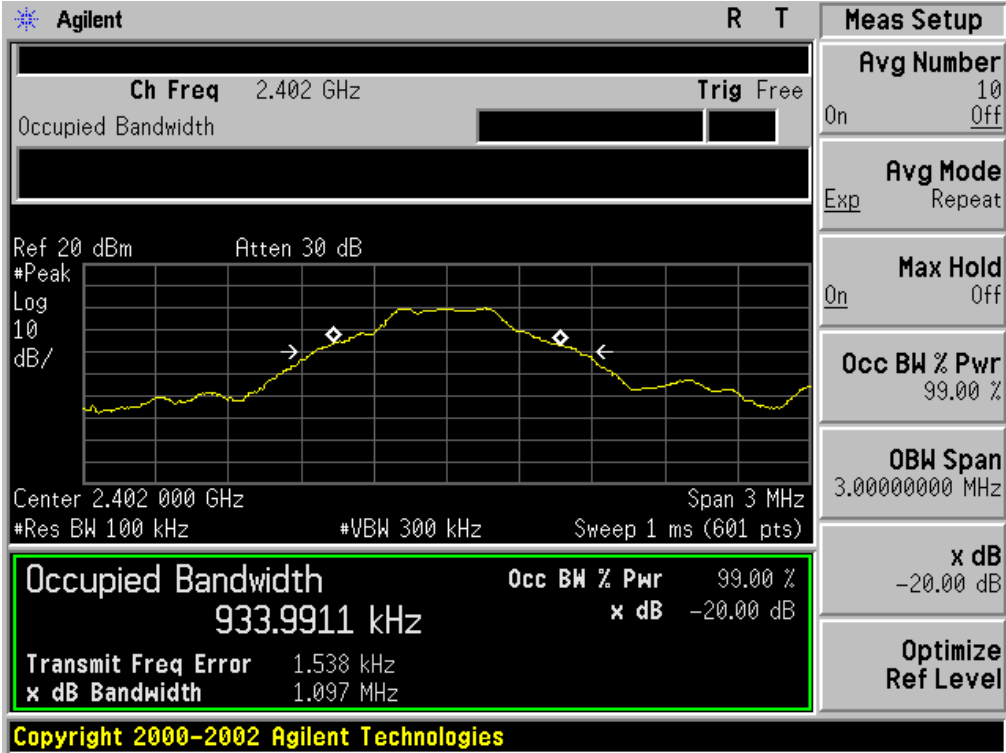

TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL

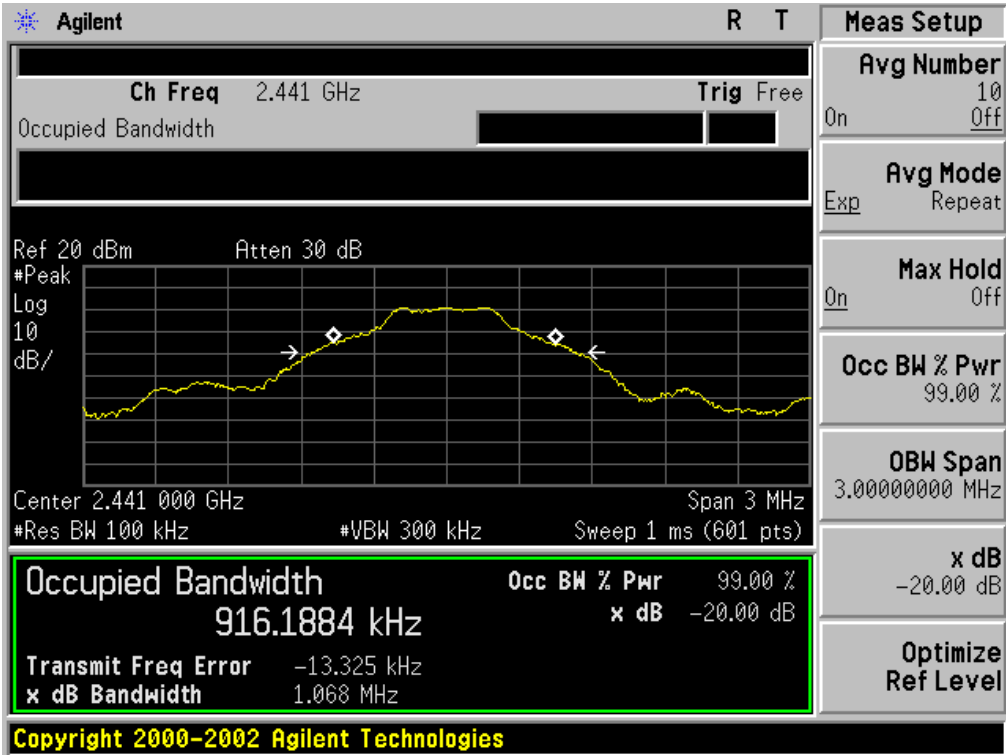


TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL

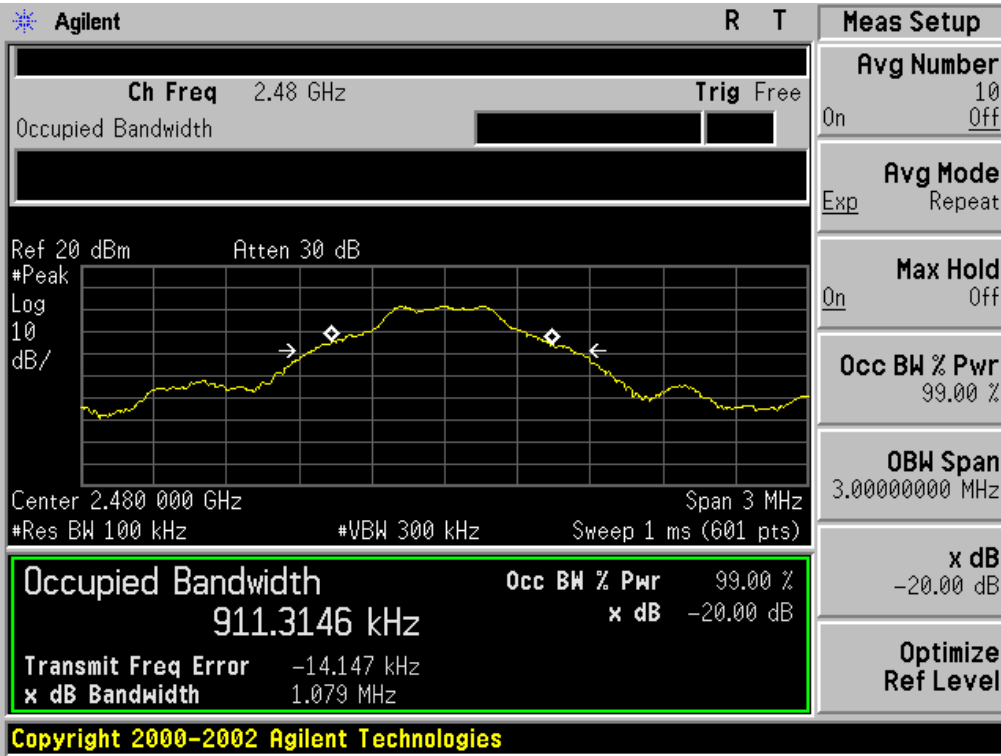


BLUETOOTH 2Mbps LIMITS AND MEASUREMENT RESULT			
Applicable Limits	Measurement Result		
	Test Data (MHz)		Criteria
N/A	Low Channel	1.368	PASS
	Middle Channel	1.354	PASS
	High Channel	1.380	PASS


TEST PLOT OF BANDWIDTH FOR LOW CHANNEL

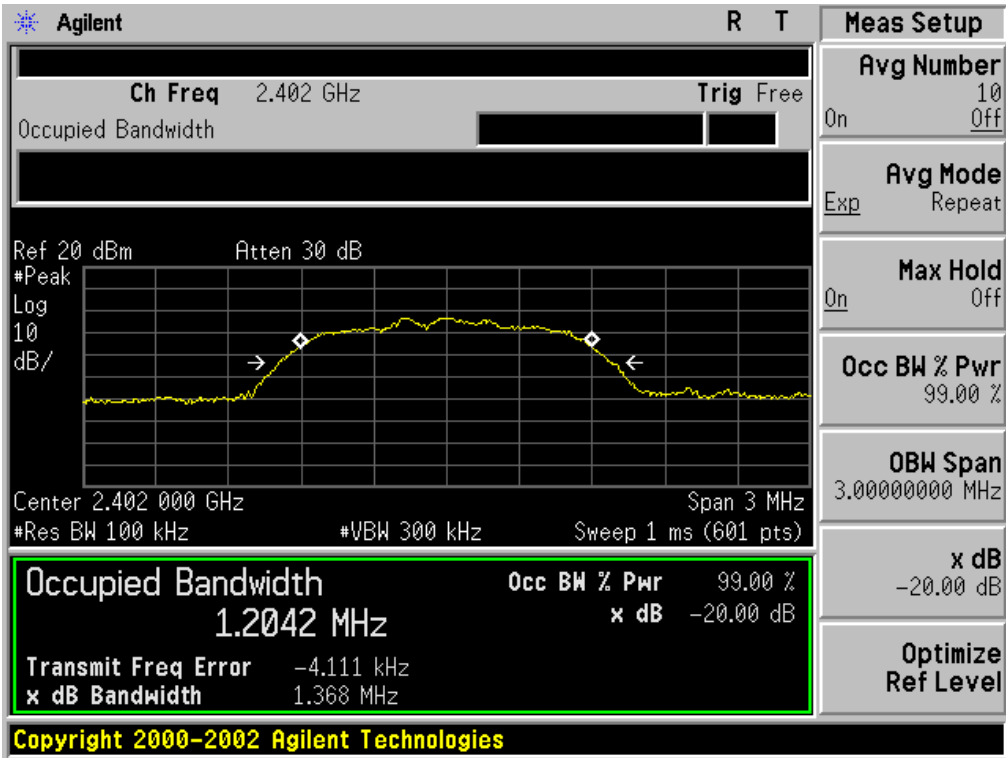

TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL

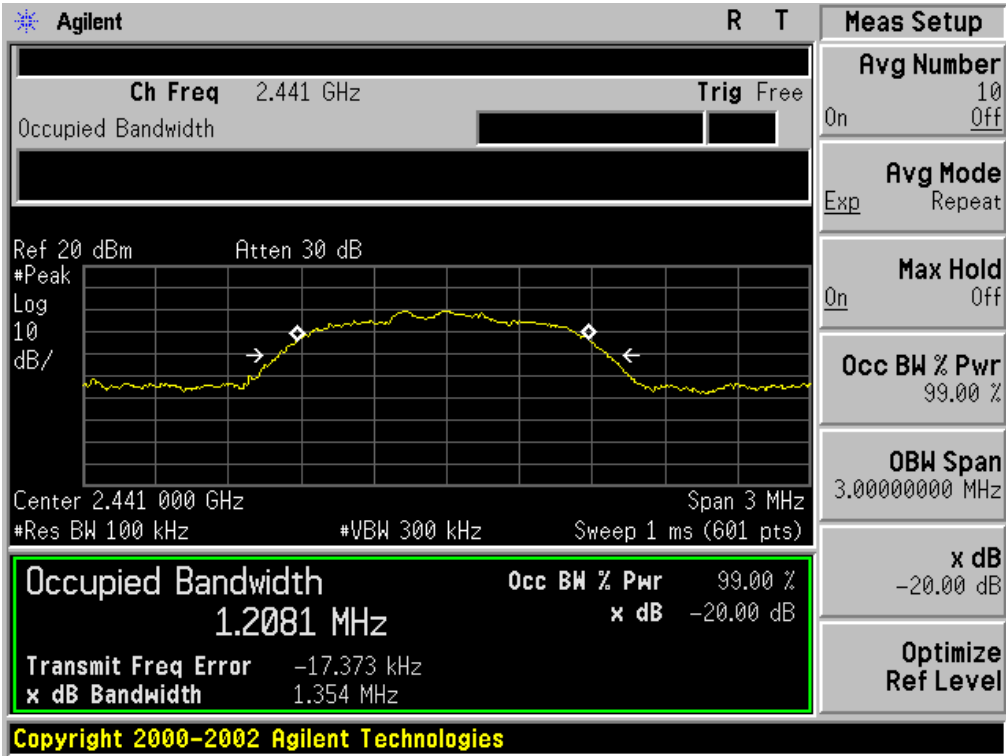


TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL

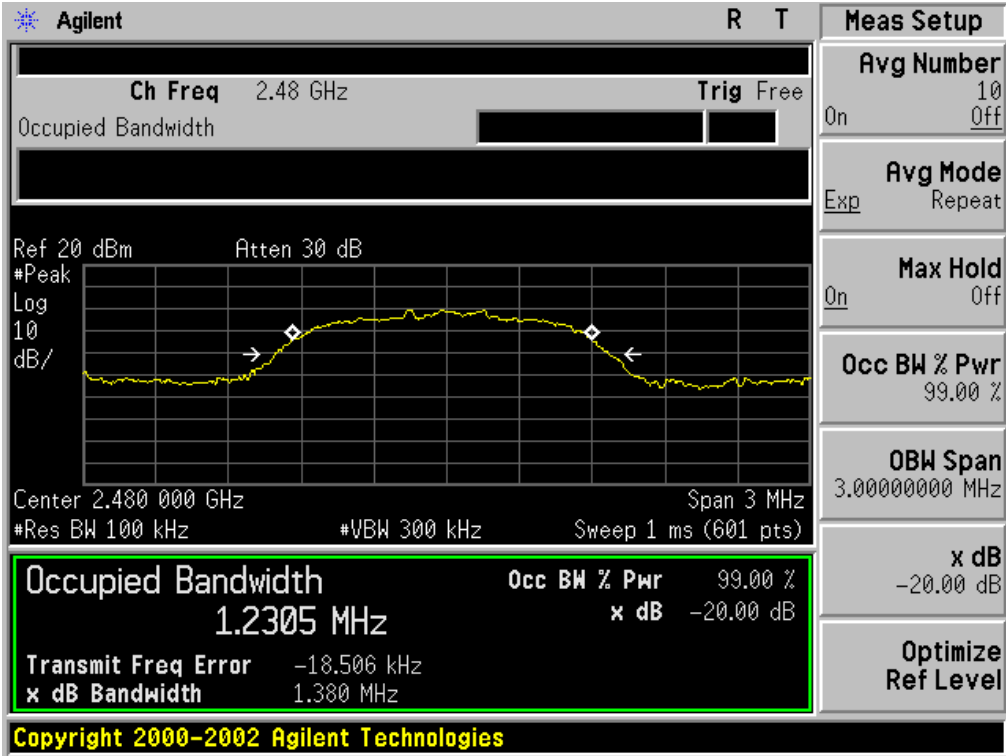


BLUETOOTH 3MBPS LIMITS AND MEASUREMENT RESULT			
Applicable Limits	Measurement Result		
	Test Data (MHz)		Criteria
N/A	Low Channel	1.376	PASS
	Middle Channel	1.362	PASS
	High Channel	1.376	PASS


TEST PLOT OF BANDWIDTH FOR LOW CHANNEL

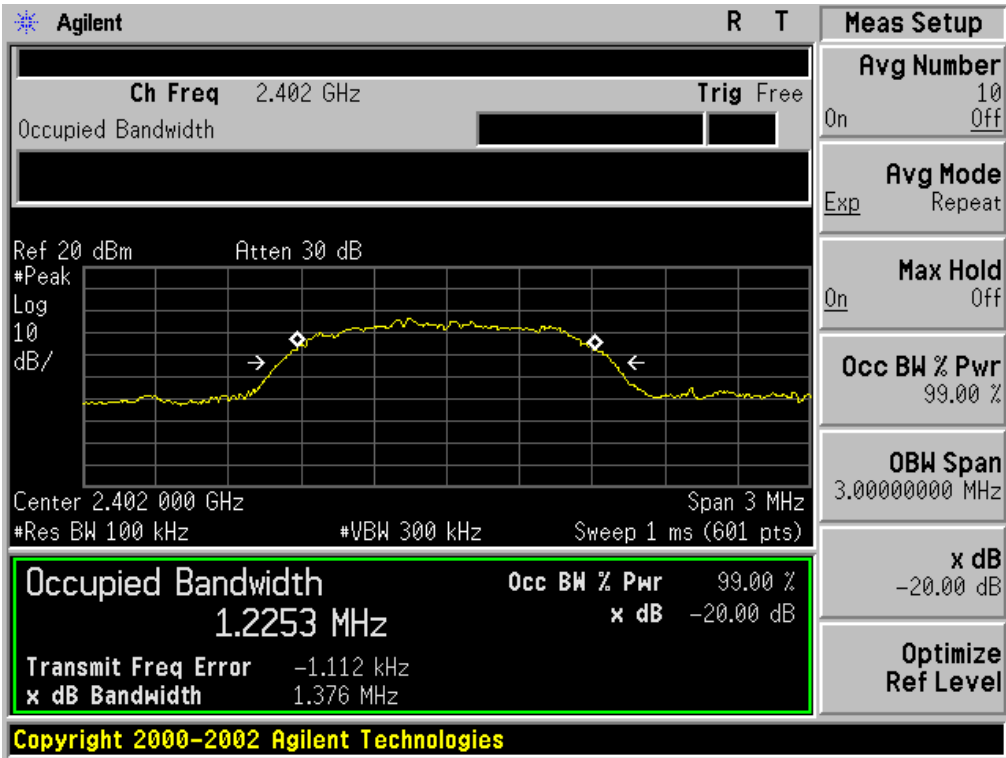

TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL

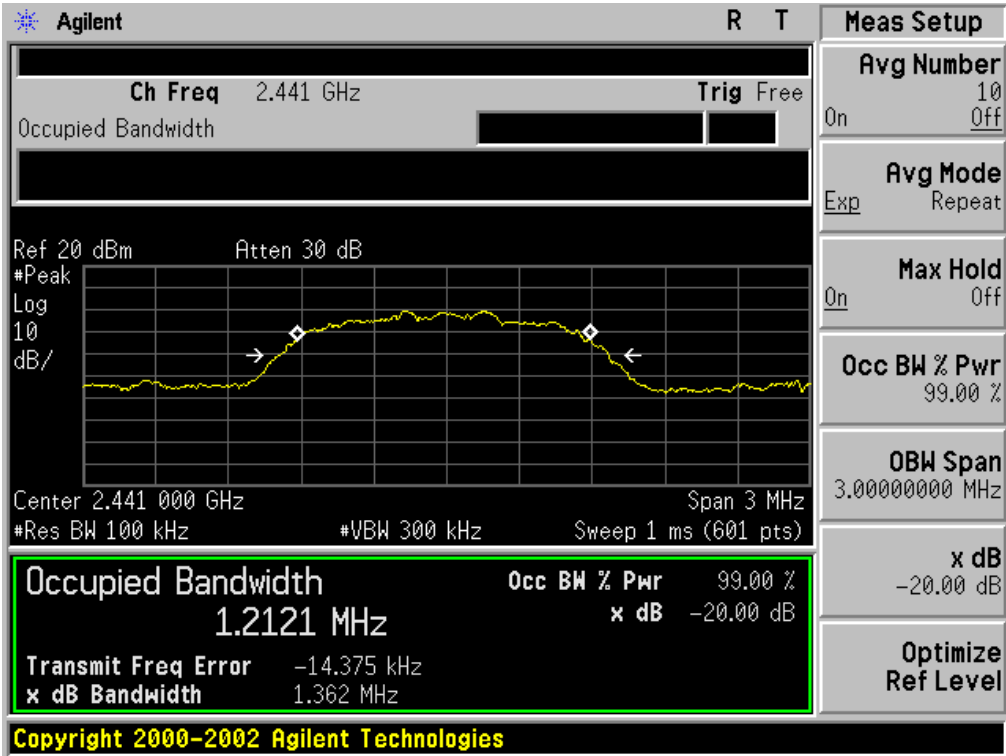


TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL

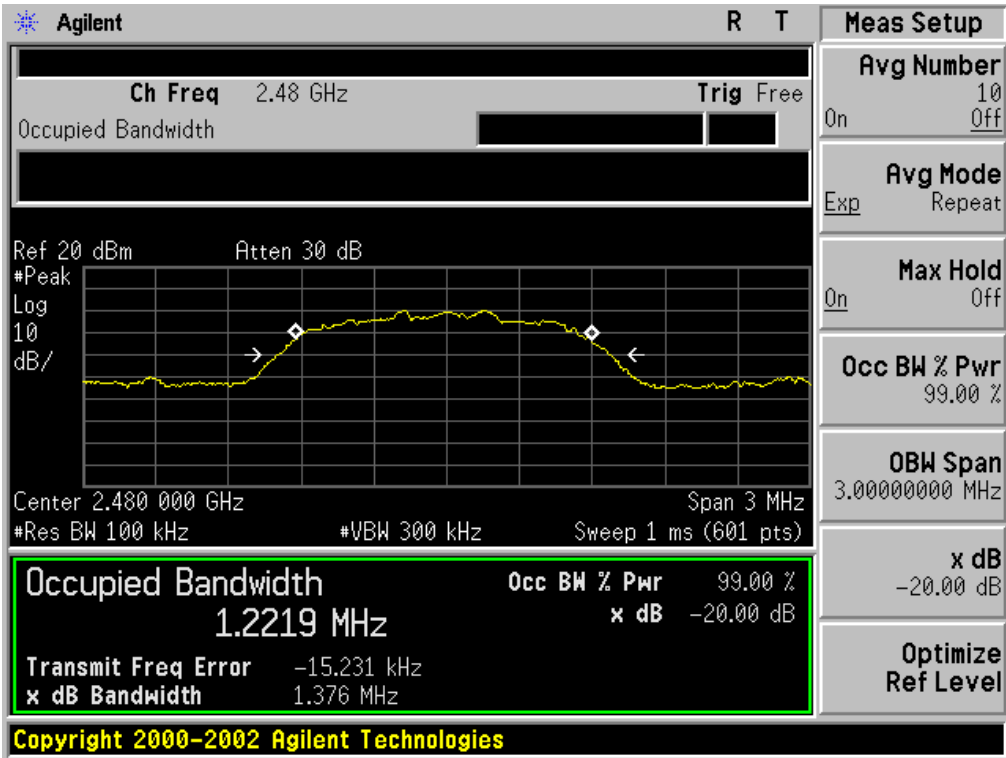


FOR BLE

BLUETOOTH 1MBPS LIMITS AND MEASUREMENT RESULT			
Applicable Limits	Measurement Result		
	Test Data (MHz)		Criteria
N/A	Low Channel	1.207	PASS
	Middle Channel	1.207	PASS
	High Channel	1.202	PASS


TEST PLOT OF BANDWIDTH FOR LOW CHANNEL

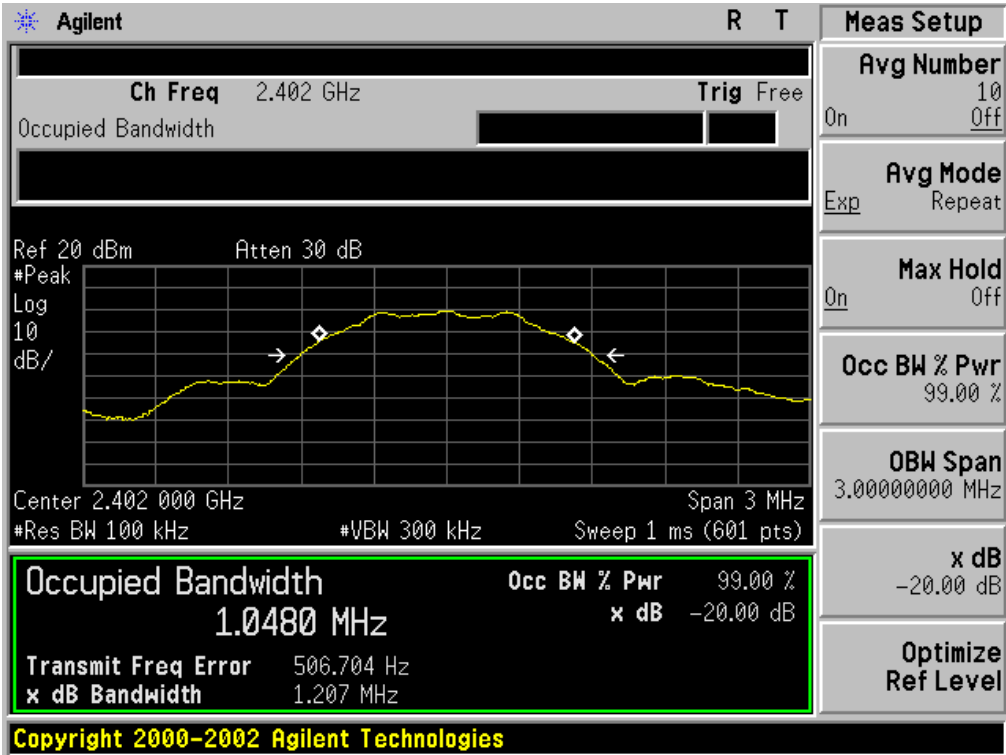

TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL

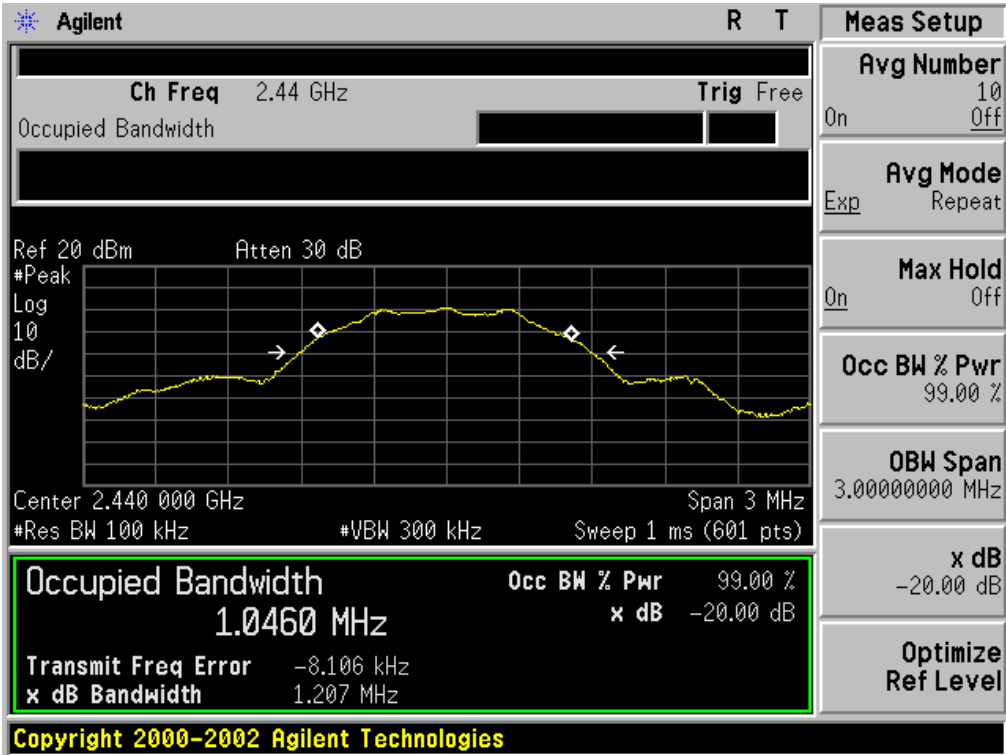

TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL

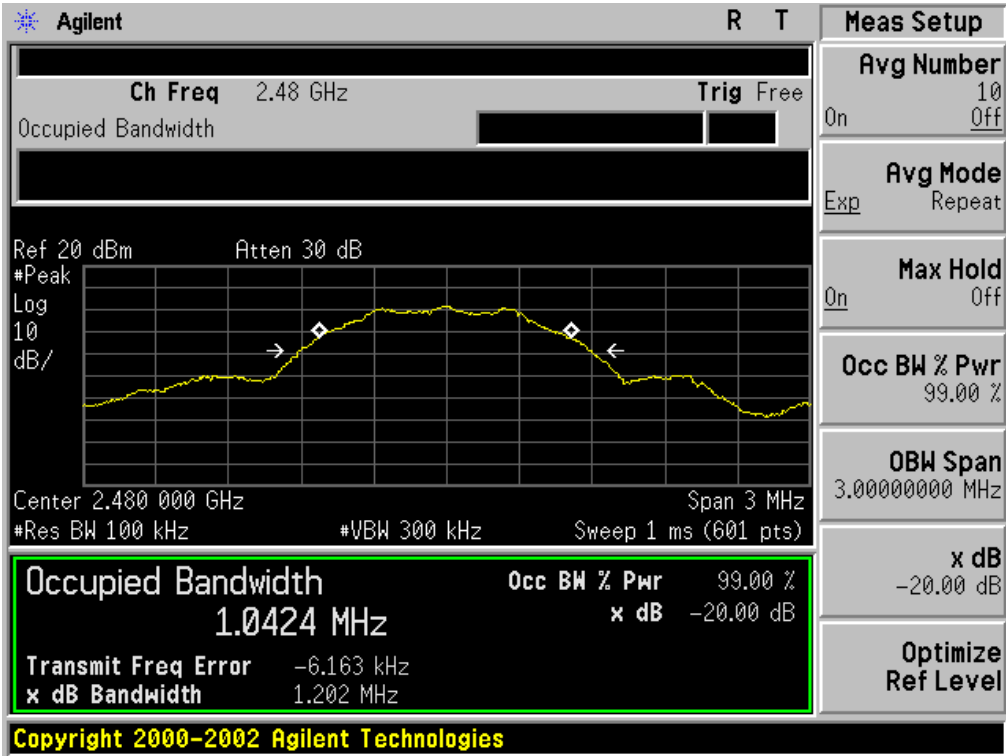

11. FCC LINE CONDUCTED EMISSION TEST


11.1. LIMITS OF LINE CONDUCTED EMISSION TEST

Frequency	Maximum RF Line Voltage	
	Q.P.(dBuV)	Average(dBuV)
150kHz~500kHz	66-56	56-46
500kHz~5MHz	56	46
5MHz~30MHz	60	50

Note:

1. The lower limit shall apply at the transition frequency.
2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.

11.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST

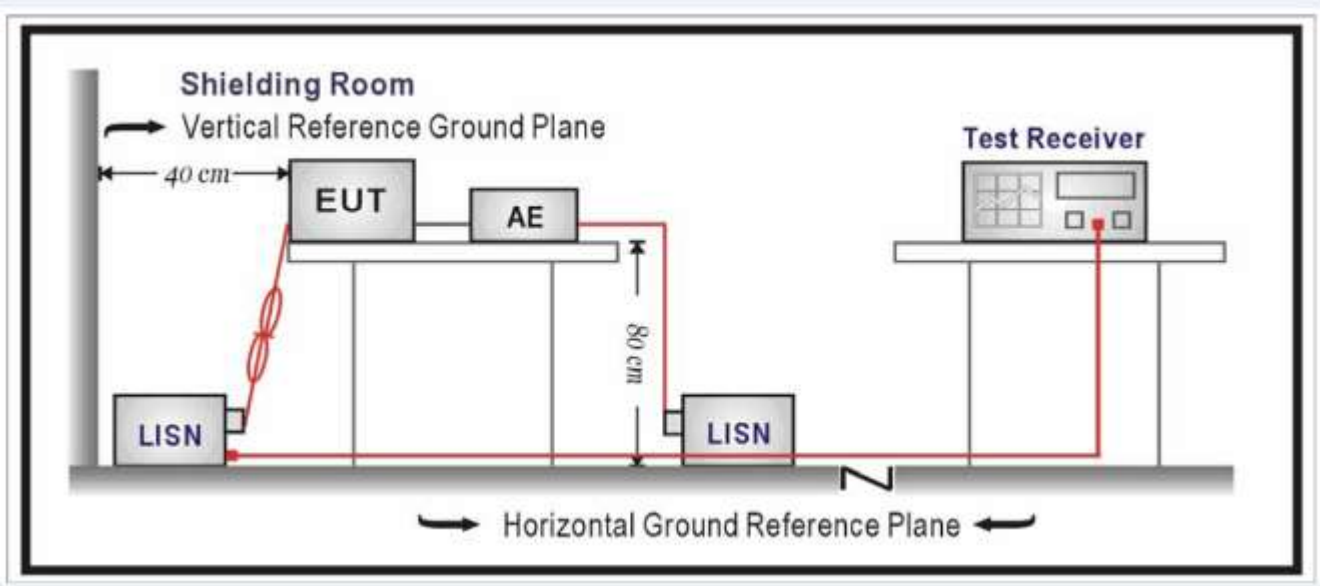

11.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST

1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.4 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.
2. Support equipment, if needed, was placed as per ANSI C63.4.
3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.4.
4. All support equipments received AC120V/60Hz power from a LISN, if any.
5. The EUT received DC charging voltage by PC or by adapter which received 120V/60Hz power by a LISN.
6. The test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
7. Analyzer / Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.
8. During the above scans, the emissions were maximized by cable manipulation.
9. The test mode(s) were scanned during the preliminary test.


Then, the EUT configuration and cable configuration of the above highest emission level were recorded for reference of final testing.

11.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST

- EUT and support equipment was set up on the test bench as per step 2 of the preliminary test.
2. A scan was taken on both power lines, Line 1 and Line 2, recording at least the six highest emissions. Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. If EUT emission level was less -2dB to the A.V. limit in Peak mode, then the emission signal was re-checked using Q.P and Average detector.
3. The test data of the worst case condition(s) was reported on the Summary Data page.

**11.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST
 FOR BR/EDR**


Line Conducted Emission Test Line 1-L

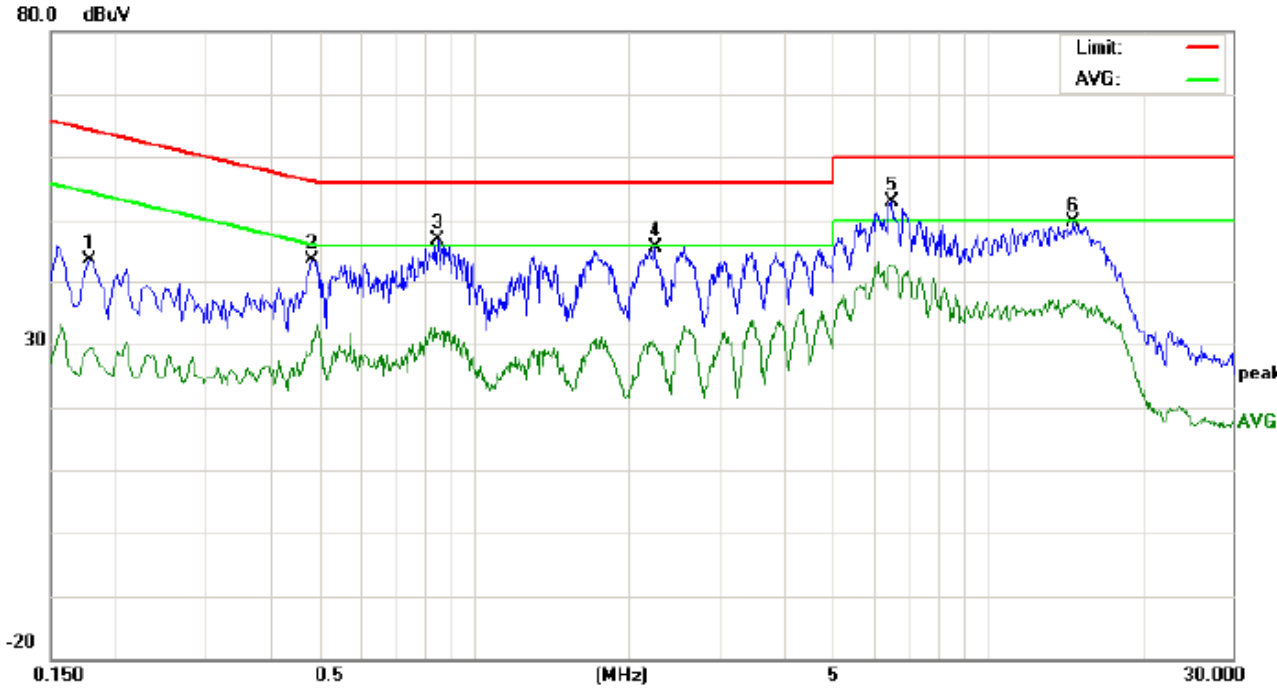

Site: Conduction Phase: *L1* Temperature: 22.5
 Limit: FCC Class B Conduction(QP) Power: Humidity: 56.4 %
 EUT: Bluetooth Speaker
 M/N: Apollo
 Mode: BT Link with charging
 Note:

No.	Freq. (MHz)	Reading_Level (dBuV)			Correct Factor (dB)	Measurement (dBuV)			Limit (dBuV)		Margin (dB)		P/F	Comment
		Peak	QP	AVG		Peak	QP	AVG	QP	AVG	QP	AVG		
1	0.1780	33.46		19.28	10.19	43.65		29.47	64.57	54.57	-20.92	-25.10	P	
2	0.4820	33.13		18.78	10.39	43.52		29.17	56.30	46.30	-12.78	-17.13	P	
3	0.8500	36.44		21.35	10.34	46.78		31.69	56.00	46.00	-9.22	-14.31	P	
4	2.2580	35.24		19.85	10.33	45.57		30.18	56.00	46.00	-10.43	-15.82	P	
5	6.5180	42.58		32.42	10.30	52.88		42.72	60.00	50.00	-7.12	-7.28	P	
6	14.6740	39.54		26.78	10.12	49.66		36.90	60.00	50.00	-10.34	-13.10	P	

Line Conducted Emission Test Line 2-N

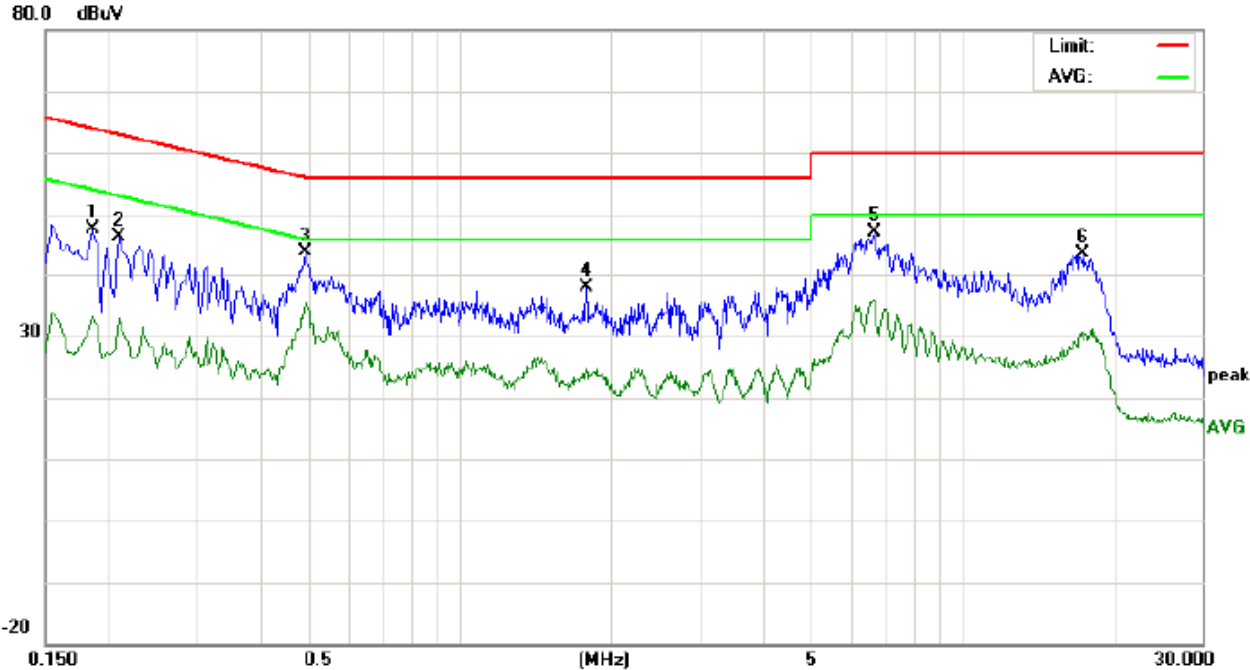


Site: Conduction Phase: **N** Temperature: 22.5
 Limit: FCC Class B Conduction(QP) Power: Humidity: 56.4 %
 EUT: Bluetooth Speaker
 M/N: Apollo
 Mode: BT Link with charging
 Note:

No.	Freq. (MHz)	Reading_Level (dBuV)			Correct Factor (dB)	Measurement (dBuV)			Limit (dBuV)		Margin (dB)		P/F	Comment
		Peak	QP	AVG		Peak	QP	AVG	QP	AVG	QP	AVG		
1	0.1860	37.53		23.01	10.20	47.73		33.21	64.21	54.21	-16.48	-21.00	P	
2	0.2100	36.23		22.54	10.23	46.46		32.77	63.20	53.20	-16.74	-20.43	P	
3	0.4940	33.56		25.25	10.40	43.96		35.65	56.10	46.10	-12.14	-10.45	P	
4	1.7820	27.66		14.45	10.29	37.95		24.74	56.00	46.00	-18.05	-21.26	P	
5	6.6660	36.72		25.55	10.32	47.04		35.87	60.00	50.00	-12.96	-14.13	P	
6	17.4060	33.55		19.65	10.13	43.68		29.78	60.00	50.00	-16.32	-20.22	P	

FOR BLE


Line Conducted Emission Test Line 1-L

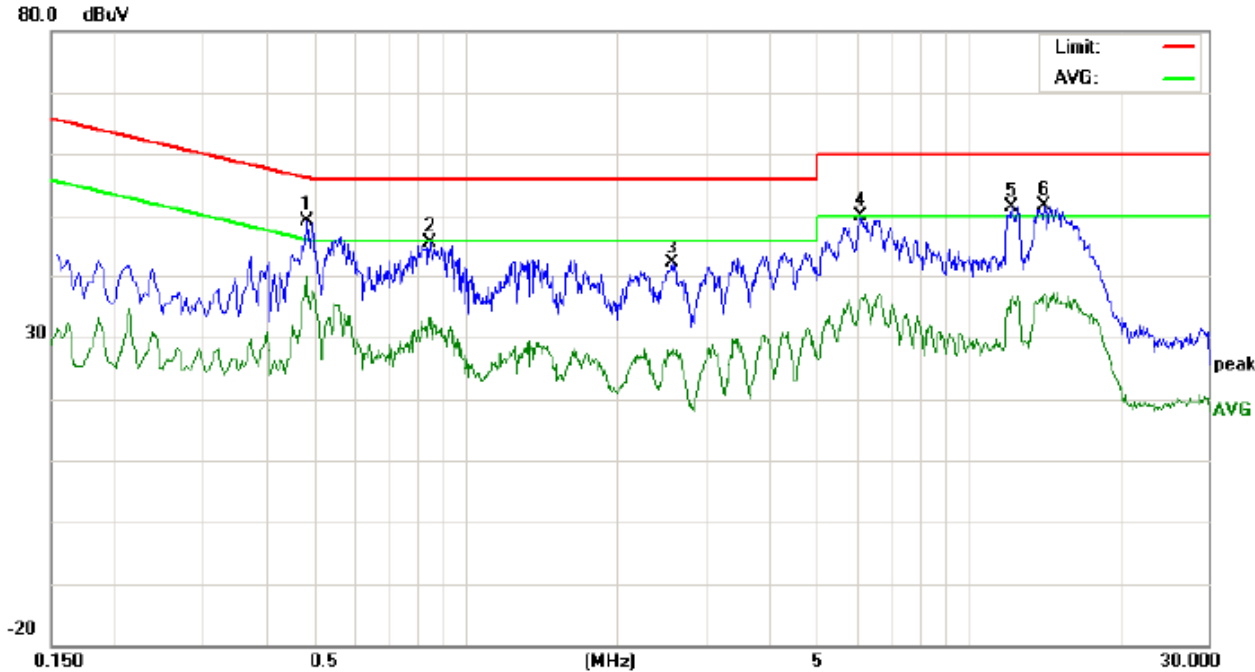

Site: Conduction Phase: **L1** Temperature: 22.5
 Limit: FCC Class B Conduction(QP) Power: Humidity: 56.4 %
 EUT: Bluetooth Speaker
 M/N: Apollo
 Mode: BT Link with charging
 Note:

No.	Freq. (MHz)	Reading_Level (dBuV)			Correct Factor (dB)	Measurement (dBuV)			Limit (dBuV)		Margin (dB)		P/F	Comment
		Peak	QP	AVG		Peak	QP	AVG	QP	AVG	QP	AVG		
1	0.4860	38.63		26.27	10.39	49.02		36.66	56.24	46.24	-7.22	-9.58	P	
2	0.8500	35.21		22.76	10.34	45.55		33.10	56.00	46.00	-10.45	-12.90	P	
3	2.5700	31.72		16.65	10.45	42.17		27.10	56.00	46.00	-13.83	-18.90	P	
4	6.1180	39.49		25.61	10.28	49.77		35.89	60.00	50.00	-10.23	-14.11	P	
5	12.2380	41.25		26.40	10.14	51.39		36.54	60.00	50.00	-8.61	-13.46	P	
6	14.2100	41.44		26.63	10.12	51.56		36.75	60.00	50.00	-8.44	-13.25	P	

Line Conducted Emission Test Line 2-N

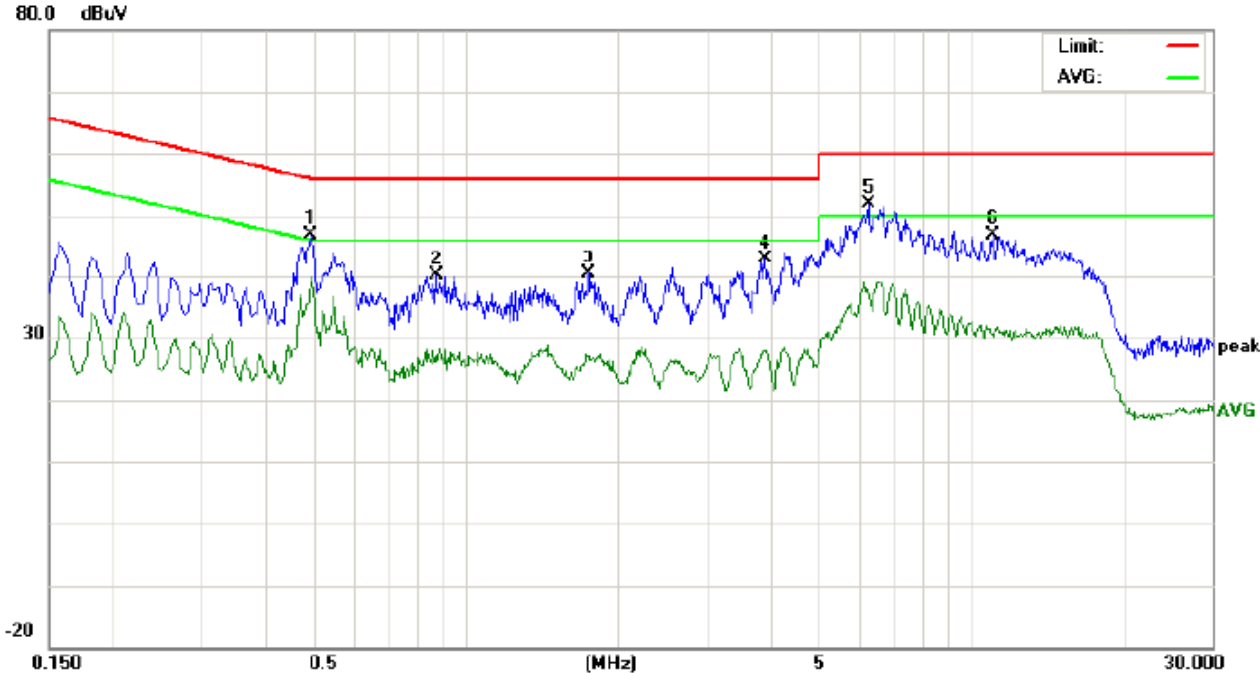

Site: Conduction Phase: **N** Temperature: 22.5
 Limit: FCC Class B Conduction(QP) Power: Humidity: 56.4 %
 EUT: Bluetooth Speaker
 M/N: Apollo
 Mode: BT Link with charging
 Note:

No.	Freq. (MHz)	Reading_Level (dBuV)			Correct Factor (dB)	Measurement (dBuV)			Limit (dBuV)		Margin (dB)		P/F	Comment
		Peak	QP	AVG		Peak	QP	AVG	QP	AVG	QP	AVG		
1	0.4940	36.60		29.37	10.40	47.00		39.77	56.10	46.10	-9.10	-6.33	P	
2	0.8740	29.67		16.76	10.38	40.05		27.14	56.00	46.00	-15.95	-18.86	P	
3	1.7460	30.03		16.92	10.30	40.33		27.22	56.00	46.00	-15.67	-18.78	P	
4	3.9180	32.53		17.54	10.44	42.97		27.98	56.00	46.00	-13.03	-18.02	P	
5	6.2619	41.62		26.31	10.29	51.91		36.60	60.00	50.00	-8.09	-13.40	P	
6	11.0380	36.87		20.43	10.10	46.97		30.53	60.00	50.00	-13.03	-19.47	P	


APPENDIX A: PHOTOGRAPHS OF TEST SETUP
FCC LINE CONDUCTED EMISSION TEST SETUP



FCC RADIATED EMISSION TEST SETUP





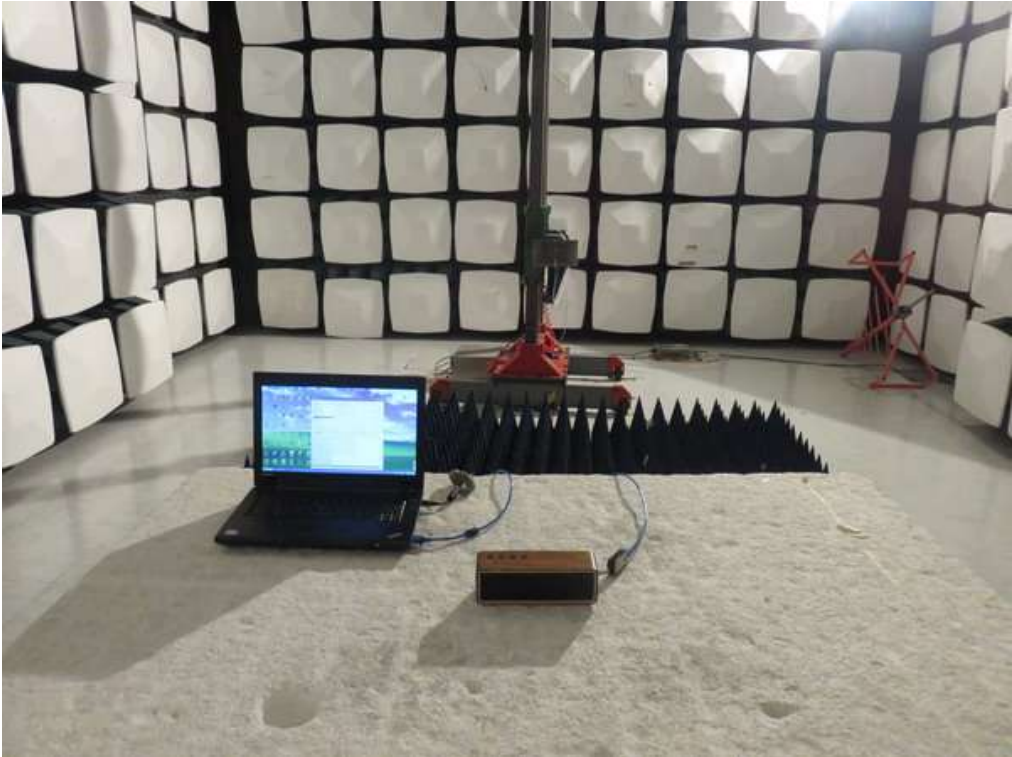

APPENDIX B: PHOTOGRAPHS OF EUT
ALL VIEW OF EUT



TOP VIEW OF EUT



BOTTOM VIEW OF EUT



FRONT VIEW OF EUT




BACK VIEW OF EUT



LEFT VIEW OF EUT



RIGHT VIEW OF EUT

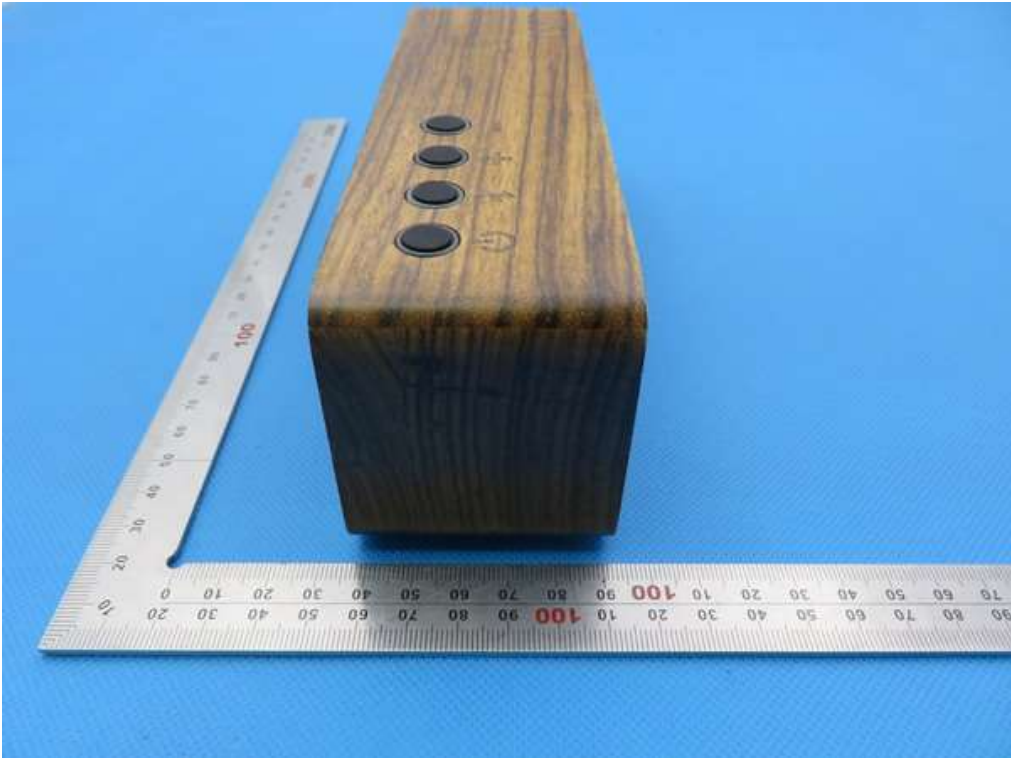

VIEW OF EUT (PORT)



OPEN VIEW OF EUT




INTERNAL VIEW OF EUT-1




INTERNAL VIEW OF EUT-2




INTERNAL VIEW OF EUT-3

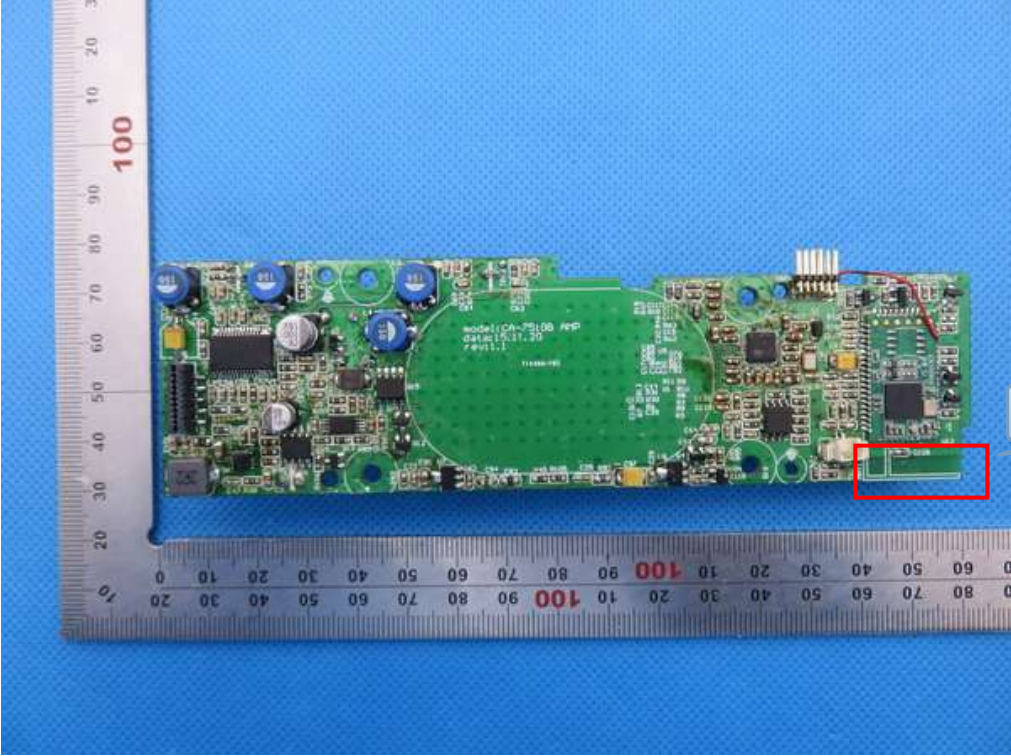


INTERNAL VIEW OF EUT-4

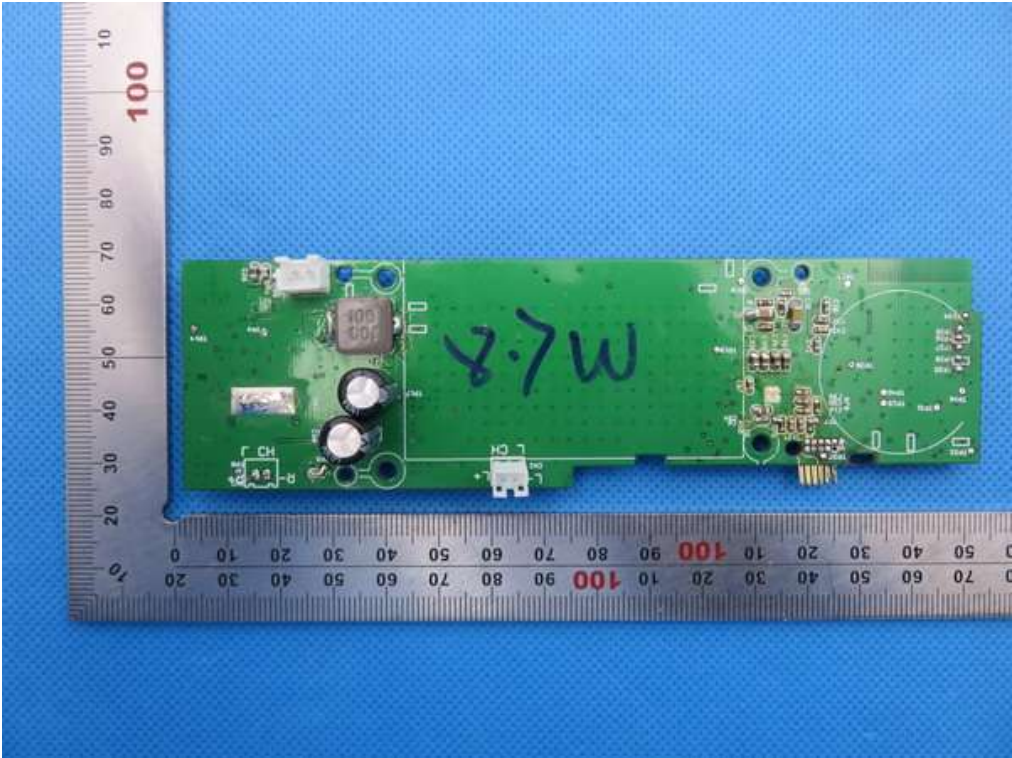


INTERNAL VIEW OF EUT-5

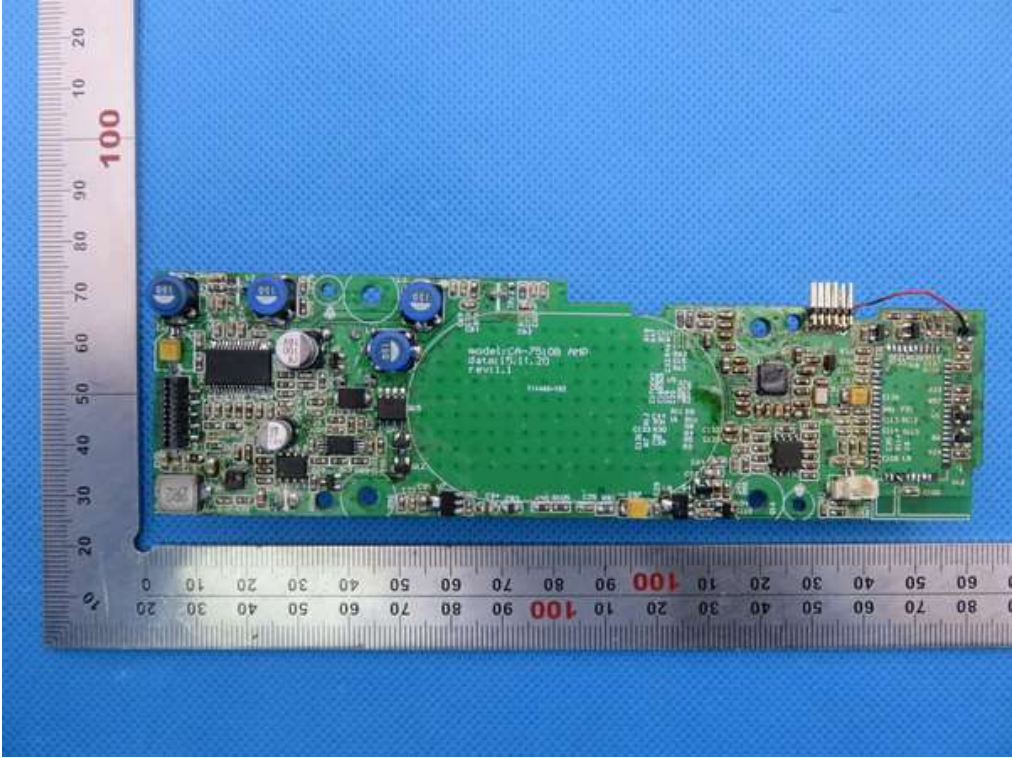


INTERNAL VIEW OF EUT-6

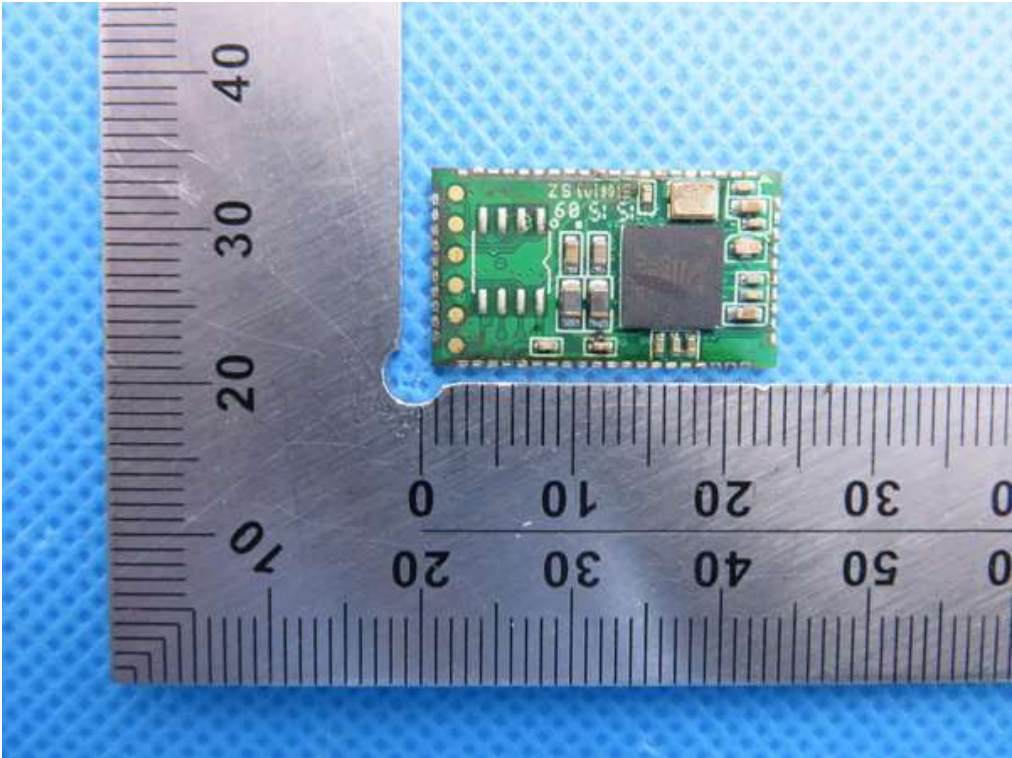


INTERNAL VIEW OF EUT-7

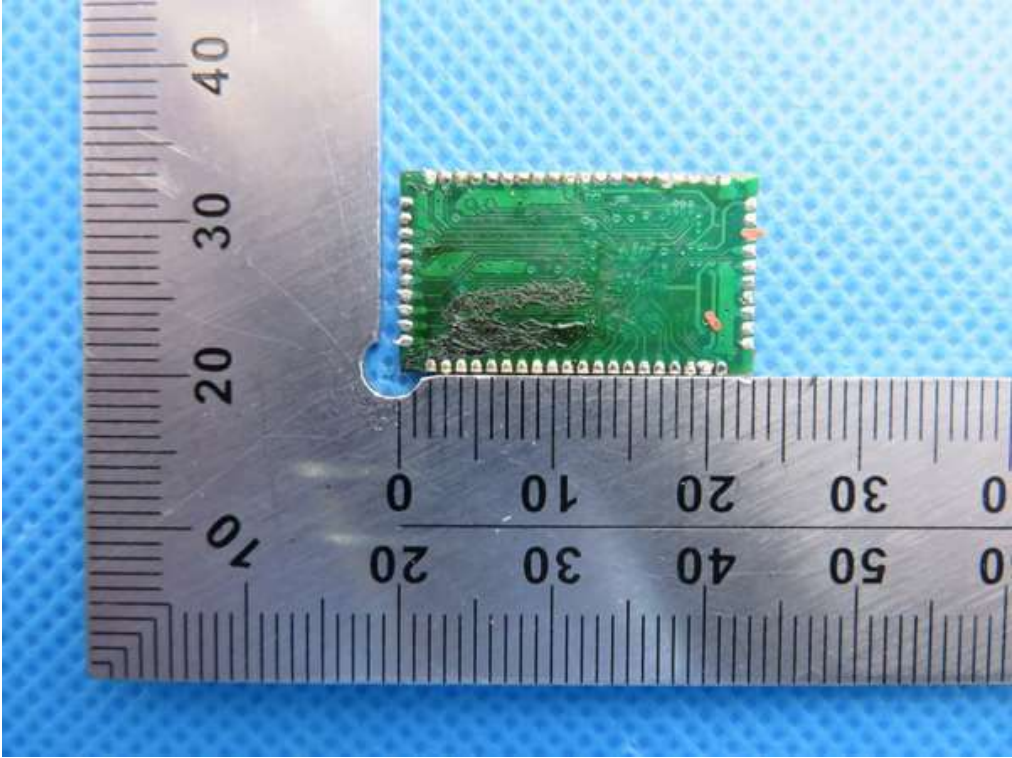


INTERNAL VIEW OF EUT-8

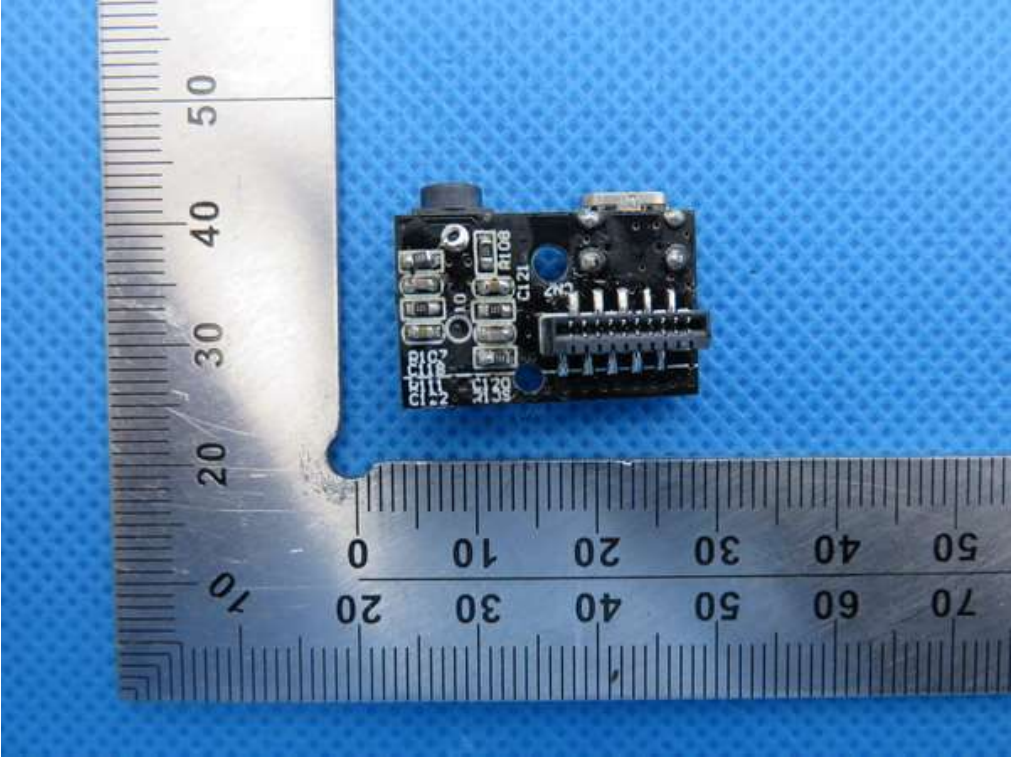


INTERNAL VIEW OF EUT-9

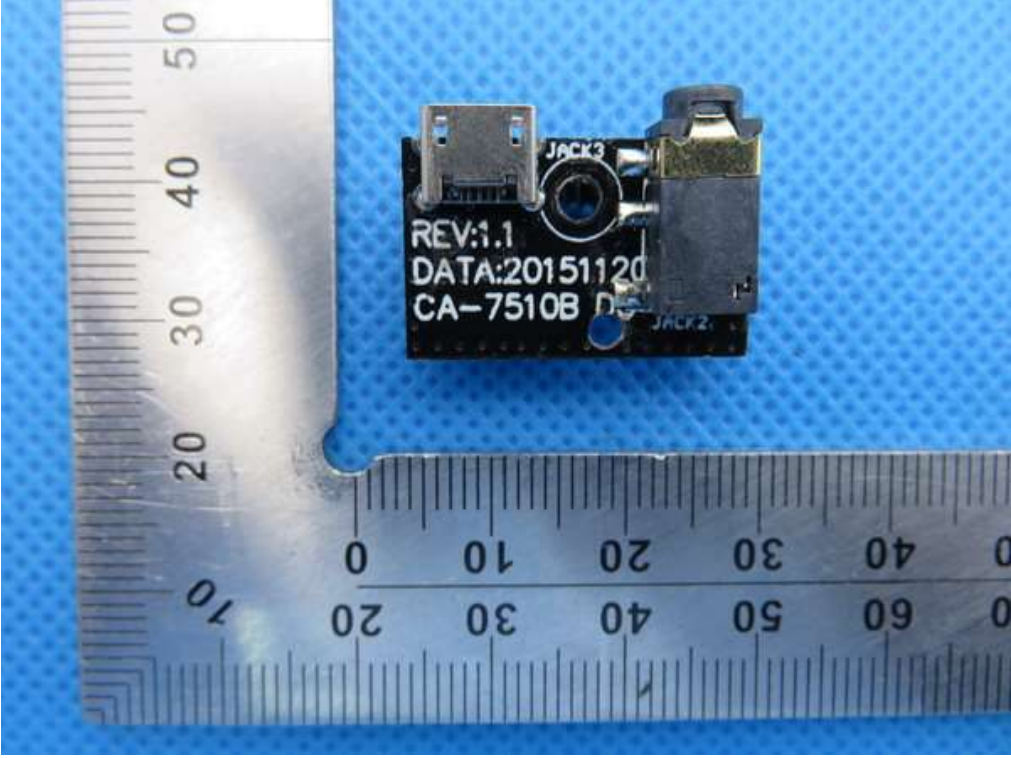

INTERNAL VIEW OF EUT-10

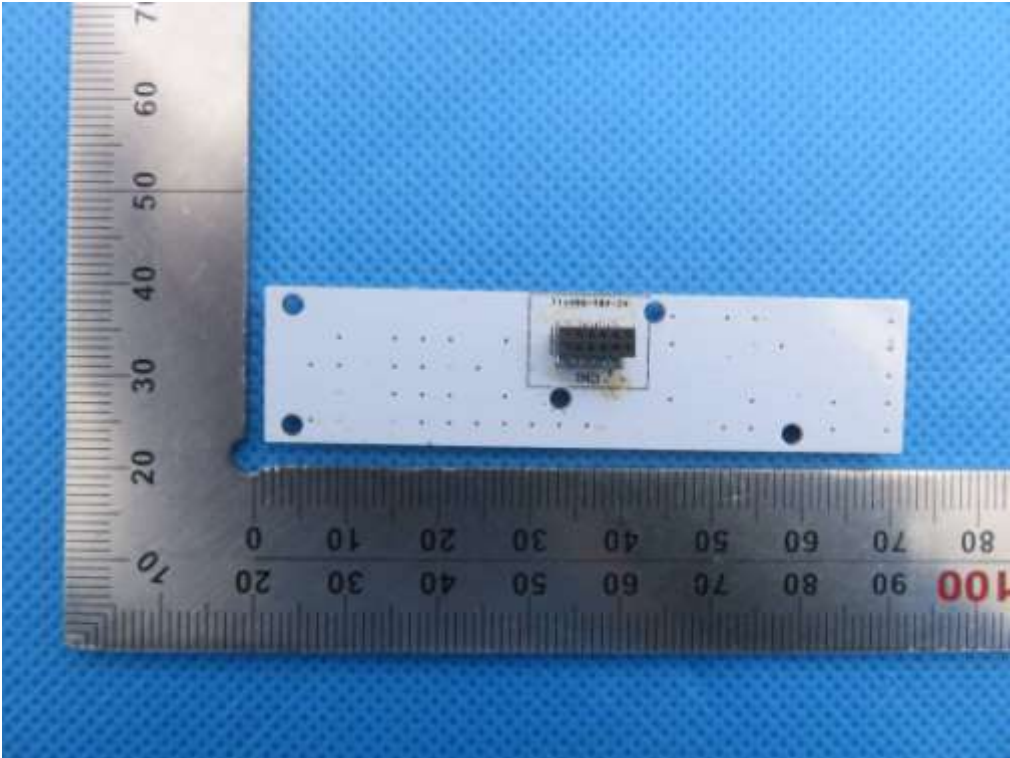

INTERNAL VIEW OF EUT-11

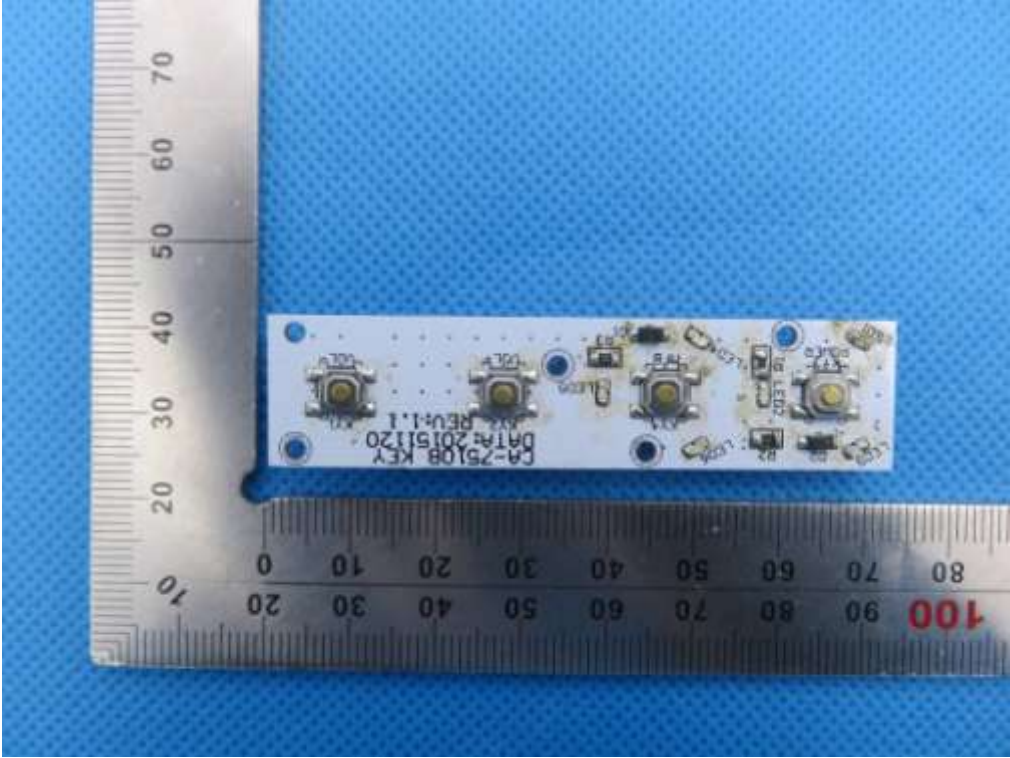

----END OF REPORT----