


A

Bar code printing area

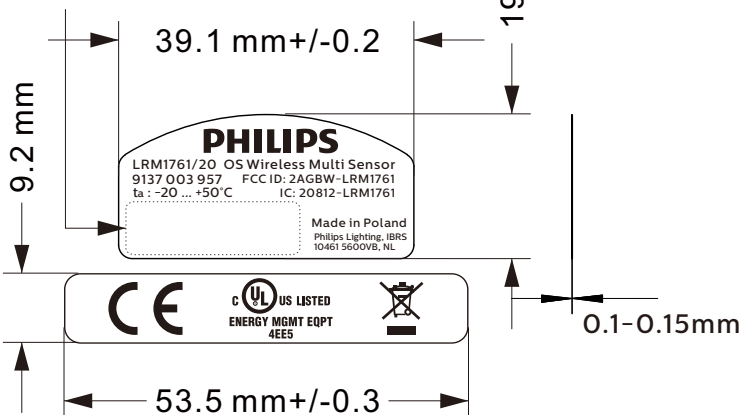

B

C

Specification:

Material: Self-adhesive Label sticker

Adhesive: permanent

Background color: White (be approved by Philips)

Printing Color: Black

Fonts: Centrale Sans (Medium)


Printing Quality: Water and petrol resistant
(according to IEC61347-1 clause 7.2)

CE need to be at least 5mm height

**Label needs to comply with UL PGDQ2 and PGAA
or PGJ2 and PGAA**



E

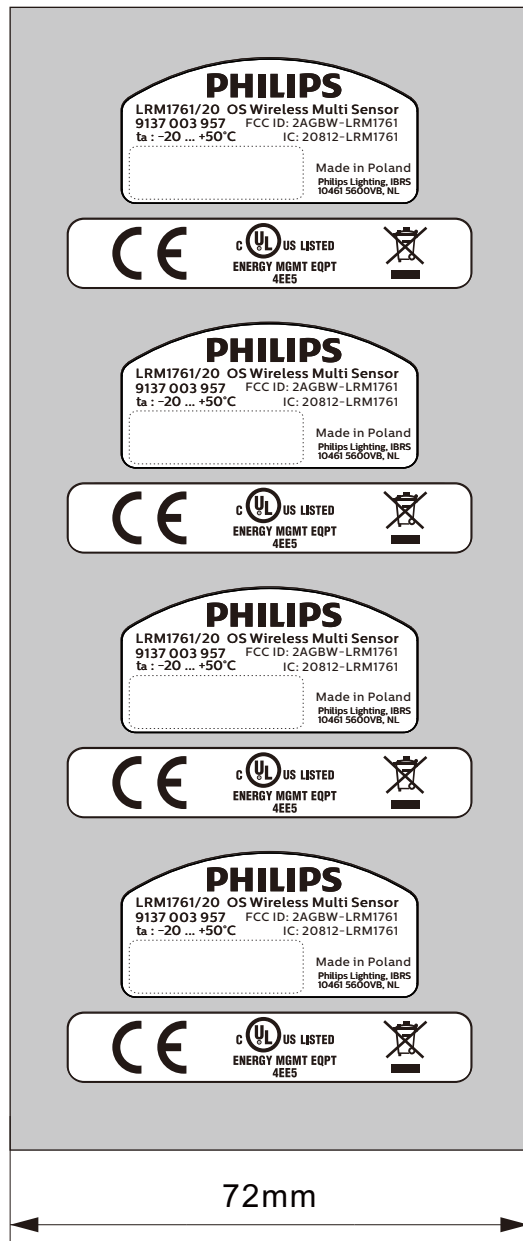

72mm

F

Bar code thermal transfer Specification:

Printing Color: Black

Printing Quality: Water and petrol resistant
(according to IEC61347-1 clause 7.2)

Type of Barcode: Code 128 as specified in ISOIEC15417


YYWW=Year Year, Week Week production data code

XXX=PFT

SW: software version see SH164 and SH043

Barcode: 10 digit numerical Code 128

10 digit number: Index number

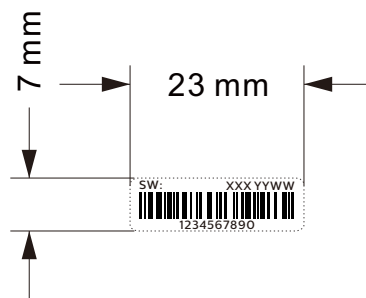

G

SIZE RANGE		GB/T 1804-2000m(Unit: mm)						ITEM	ASSEMBLY NO.	QUANT.
TOLERANCE		0.5-3	>3-6	>6-30	>30-120	>120-400	>400-1000			
		±0.1	±0.1	±0.2	±0.3	±0.5	±0.8			
GENERAL ROUGHNESS	UNIT	Fasson 72826M						MODEL		
✓	mm							OSW		
SCALE	PROJECT TYPE							ORDER NO.	QUANT.	
MODEL NAME:		Product label			WEIGHT: (g)	PART NUMBER:		1 2017-04-10		
					0.4g	4422 409 6709		1 2017-05-03		
								1 2017-06-06		
								2 2017-08-15		
REV. CHANGE NO. DATE										
DESIGNED BY		CHECKED BY		1	SH.	SH. 110 of 1		FORM NO.	A4	
DRAWN BY		APPROVED BY		REVISED BY		PHILIPS LIGHTING ELECTRONICS (SHANGHAI) CO., LTD				

H

