

**Application for FCC Certification
On behalf of**

Philips Lighting (China) Investment Co., Ltd.

Product Name: LED MODULE

Model No.: 2AGBW324131254491X

FCC ID: 2AGBW324131254491X

Prepared For: Philips Lighting (China) Investment Co., Ltd.
Building 9#, Lane 888, Tianlin Road, Minhang District,
Shanghai 200233, China

Prepared By: Audix Technology (Shanghai) Co., Ltd.
3F and 4F, 34Bldg 680 Guiping Rd.,
Caohejing Hi-Tech Park,
Shanghai 200233, China

Tel: +86-21-64955500
Fax: +86-21-64955491

Report No. : ACI-F16257
Date of Test : Aug. 02 – 12, 2016
Date of Report : Aug. 15, 2016

TABLE OF CONTENTS

	Page
1 SUMMARY OF STANDARDS AND RESULTS.....	5
1.1 Description of Standards and Results.....	5
2 GENERAL INFORMATION.....	6
2.1 Description of Equipment Under Test.....	6
2.2 Description of Test Facility.....	7
2.3 Measurement Uncertainty	7
3 RADIATED EMISSION TEST.....	8
3.1 Test Equipment.....	8
3.2 Block Diagram of Test Setup	9
3.3 Radiated Emission Limit [FCC Part 15 Subpart C 15.209]	10
3.4 Test Configuration.....	10
3.5 Operating Condition of EUT	10
3.6 Test Procedures	10
3.7 Test Results	11
4 6 dB BANDWIDTH MEASUREMENT.....	21
4.1 Test Equipment.....	21
4.2 Block Diagram of Test Setup	21
4.3 Specification Limits (§15.247(a)(2)).....	21
4.4 Operating Condition of EUT	21
4.5 Test Procedure	21
4.6 Test Results	21
5 MAXIMUM PEAK OUTPUT POWER MEASUREMENT.....	24
5.1 Test Equipment.....	24
5.2 Block Diagram of Test Setup	24
5.3 Specification Limits ((§15.247(b)(3)))	24
5.4 Operating Condition of EUT	24
5.5 Test Procedure	24
5.6 Test Results	24
6 EMISSION LIMITATIONS MEASUREMENT.....	27
6.1 Test Equipment.....	27
6.2 Block Diagram of Test Setup	27
6.3 Specification Limits (§15.247(d))	27
6.4 Operating Condition of EUT	27
6.5 Test Procedure	27
6.6 Test Results	27
7 BAND EDGES MEASUREMENT	37
7.1 Test Equipment.....	37
7.2 Block Diagram of Test Setup	37
7.3 Specification Limits (§15.247(d))	37
7.4 Operating Condition of EUT	37
7.5 Test Procedure	37
7.6 Test Results	37
8 POWER SPECTRAL DENSITY MEASUREMENT	39

8.1 Test Equipment.....	39
8.2 Block Diagram of Test Setup	39
8.3 Specification Limits (§15.247(e))	39
8.4 Operating Condition of EUT	39
8.5 Test Procedure.....	39
8.6 Test Results	39
9 DEVIATION TO TEST SPECIFICATIONS	42

TEST REPORT FOR FCC CERTIFICATE

Applicant : Philips Lighting (China) Investment Co., Ltd.
EUT Description : LED MODULE
(A) Model No. : 2AGBW324131254491X
(B) Power Supply : DC 5V

Test Procedure Used:

*FCC RULES AND REGULATIONS PART 15 SUBPART C OCTOBER 2015
AND ANSI C63.10-2013*

The device described above is tested by Audix Technology (Shanghai) Co., Ltd. to determine the maximum emission levels emanating from the device. The maximum emission levels are compared to the FCC Part 15 Subpart C limits.

The test results are contained in this test report and Audix Technology (Shanghai) Co., Ltd. is assumed full responsibility for the accuracy and completeness of these measurements. This report also shows that the EUT (M/N: Refer to Sec2.1), which was tested on Aug. 02 – 12, 2016 is technically compliance with the FCC limits.

This report applies to above tested sample only. This report shall not be reproduced in part without written approval of Audix Technology (Shanghai) Co., Ltd.

This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government.

Date of Test : Aug. 02 – 12, 2016 Date of Report : Aug. 15, 2016

Producer : Alan He
ALAN HE / Assistant

Review : Byron Wu
BYRON WU / Deputy Assistant Manager

®
For and on behalf of
Audix Technology (Shanghai) Co., Ltd.

Signatory : EMCBYRON KWO
Authorized Signature EMCBYRON KWO / Assistant General Manager

1 SUMMARY OF STANDARDS AND RESULTS

1.1 Description of Standards and Results

The EUT have been tested according to the applicable standards as referenced below:

Description / Test Item	Test Standard	Results	Meets Limit
EMISSION			
Conducted Emission	FCC RULES AND REGULATIONS PART 15 SUBPART C October 2015 AND ANSI C63.10:2013	N/A	15.207
Radiated Emission	FCC RULES AND REGULATIONS PART 15 SUBPART C October 2015 AND ANSI C63.10:2013	Pass	15.209(a) 15.205(a)(c)
6 dB Bandwidth Measurement	FCC RULES AND REGULATIONS PART 15 SUBPART C October 2015 AND ANSI C63.10:2013	Pass	15.247(a)(2)
Maximum Peak Output Power Measurement	FCC RULES AND REGULATIONS PART 15 SUBPART C October 2015 AND ANSI C63.10:2013	Pass	15.247(b)(3)
Emission Limitations Measurement	FCC RULES AND REGULATIONS PART 15 SUBPART C October 2015 AND ANSI C63.10:2013	Pass	15.247(d)
Band Edge Measurement	FCC RULES AND REGULATIONS PART 15 SUBPART C October 2015 AND ANSI C63.10:2013	Pass	15.247(d)
Power Spectral Density Measurement	FCC RULES AND REGULATIONS PART 15 SUBPART C October 2015 AND ANSI C63.10:2013	Pass	15.247(e)
N/A is an abbreviation for Not Applicable.			

2 GENERAL INFORMATION

2.1 Description of Equipment Under Test

Description : LED MODULE

Type of EUT : Production Pre-product Pro-type

Model Number : 2AGBW324131254491X

Radio Tech : Zigbee

Channel Freq. : 2405MHz, 2425MHz, 2450MHz, 2475MHz, 2480MHz

Tested Freq. : 2405MHz, 2450MHz, 2480MHz

Modulation : O-QPSK

Antenna Gain : -5 dBi

Test Mode : The EUT was set at continuous TX with duty cycle 100% during all the test in the report

Applicant : Philips Lighting (China) Investment Co., Ltd.
Building 9#, Lane 888, Tianlin Road, Minhang District,
Shanghai 200233, China

2.2 Description of Test Facility

Site Description : Sept. 17, 1998 file on
(Semi-Anechoic Chamber) Jan. 15, 2015 Renewed
Federal Communications Commission
FCC Engineering Laboratory
7435 Oakland Mills Road
Columbia, MD 21046, USA

Name of Firm : Audix Technology (Shanghai) Co., Ltd.

Site Location : 3F 34 Bldg 680 Guiping Rd.,
Caohejing Hi-Tech Park,
Shanghai 200233, China

FCC registration Number : 91789

Accredited by NVLAP, Lab Code : 200371-0

2.3 Measurement Uncertainty

Radiated Emission Expanded Uncertainty (30-200MHz):

$$\begin{aligned} U &= 4.3 \text{dB (Horizontal)} \\ U &= 4.6 \text{dB (Vertical)} \end{aligned}$$

Radiated Emission Expanded Uncertainty (200M-1GHz):

$$\begin{aligned} U &= 4.5 \text{dB (Horizontal)} \\ U &= 5.4 \text{dB (Vertical)} \end{aligned}$$

Radiated Emission Expanded Uncertainty (Above 1GHz):

$$\begin{aligned} U &= 5.1 \text{ dB} \\ 6 \text{ dB Bandwidth Expanded Uncertainty} &: U = \pm 1 \times 10^{-8} \text{ MHz} \\ \text{Maximum Peak Output Power Expanded Uncertainty: } U &= \pm 1.56 \text{ dB} \\ \text{Emission Limitations Expanded Uncertainty} &: U = \pm 1.20 \text{ dB} \\ \text{Band Edge Expanded Uncertainty} &: U = \pm 1.20 \text{ dB} \\ \text{Power Spectral Density Expanded Uncertainty} &: U = \pm 1.20 \text{ dB} \end{aligned}$$

3 RADIATED EMISSION TEST


3.1 Test Equipment

The following test equipment are used during the radiated emission test in a semi-anechoic chamber:

Item	Type	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
1.	Pre-Amplifier	Agilent	8447D	2944A10548	Mar 18, 2016	Sep 17, 2017
2.	Pre-Amplifier	HP	8449B	3008A00864	Mar 20, 2016	Mar 19, 2017
3.	Spectrum Analyzer	Agilent	N9010A	MY52221182	Jun 12, 2016	Jun 11, 2017
4.	Test Receiver	R&S	ESCI	101302	Apr 27, 2016	Apr 26, 2017
5.	Bi-log Antenna	TESEQ	CBL6112D	23193	May 15, 2016	May 14, 2017
6.	Horn Antenna	EMCO	3115	9607-4878	Jun 03, 2016	Jun 02, 2017
7.	Horn Antenna	EMCO	3116	00062643	Sep 08, 2015	Sep 08, 2017
8.	50Ω Coaxial Switch	Anritsu	MP59B	6200426390	Mar 18, 2016	Sep 17, 2017
9.	Software	Audix	E3	SET00200 9912M295-2	--	--


3.2 Block Diagram of Test Setup

3.2.1 Below 1GHz

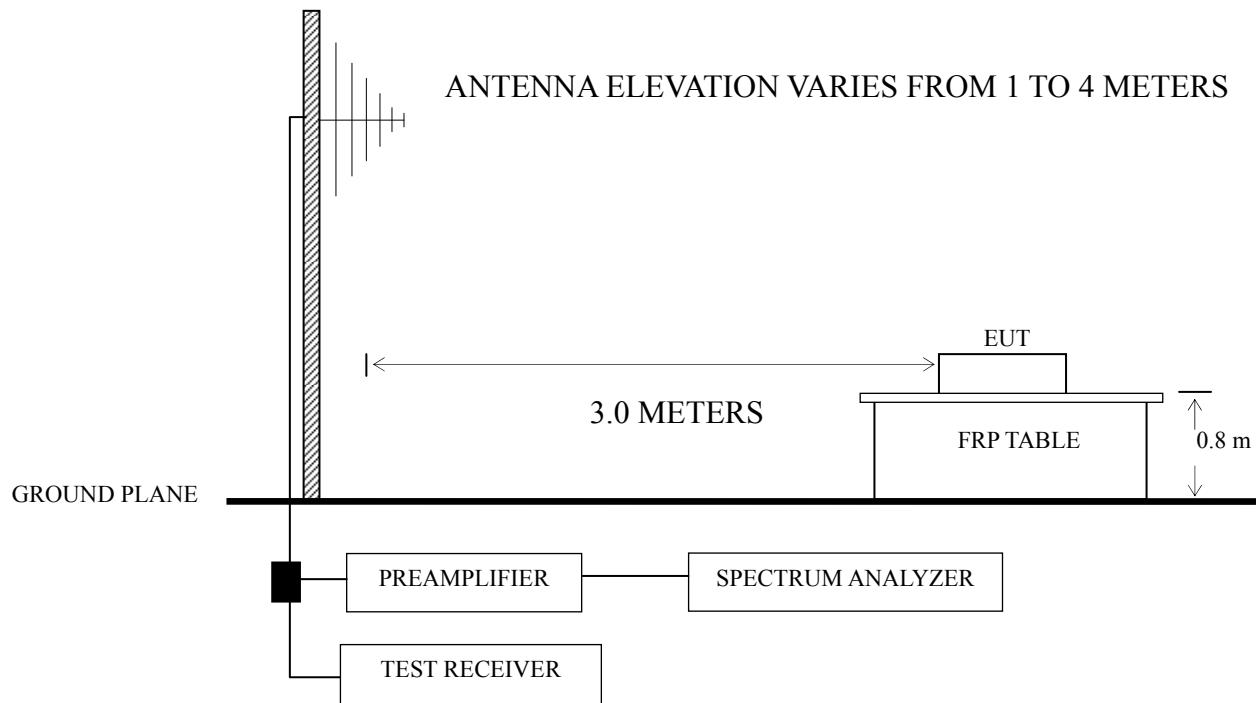

■ : 50 ohm Coaxial Switch

3.2.2 Above 1GHz

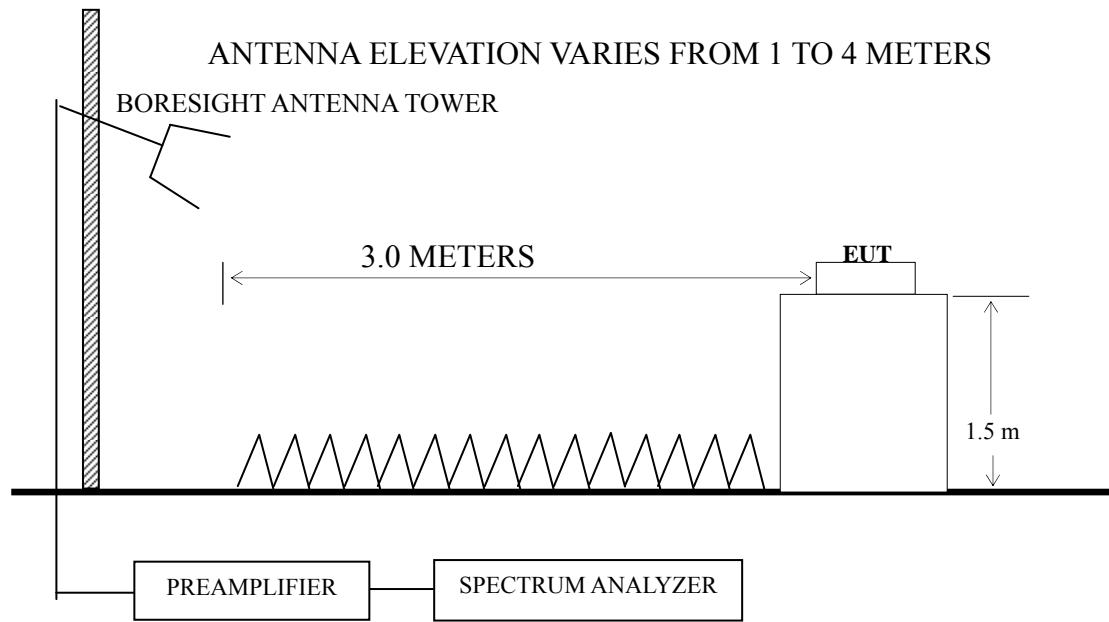

3.3 Radiated Emission Limit [FCC Part 15 Subpart C 15.209]

Frequency (MHz)	Distance (m)	Field strength limits (μ V/m)	
		(μ V/m)	dB(μ V/m)
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46.0
Above 960	3	500	54.0

NOTE 1 - Emission Level dB (μ V/m) = 20 log Emission Level (μ V/m)
 NOTE 2 - The tighter limit applies at the band edges.
 NOTE 3 - Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.
 NOTE 4 - The limits shown are based on Quasi-peak value detector below or equal to 1GHz and Average value detector above 1GHz.
 NOTE 5 - Above 1 GHz, the limit on peak emission is 20 dB above the maximum permitted average emission limit applicable to the EUT

3.4 Test Configuration

The EUT (listed in Sec.2.1) and the simulators (listed in Sec.2.2) were installed as shown on Sec.3.2 to meet FCC requirements and operating in a manner that tends to maximize its emission level in a normal application.

3.5 Operating Condition of EUT

3.5.1 Setup the EUT as shown in Sec. 3.2.

3.5.2 Turn on the power of all equipment.

3.5.3 Turn the EUT on the test mode, and then test.

3.6 Test Procedures

Radiated emission test applies to harmonics/spurs that fall in the restricted bands listed in Section 15.205. The maximum permitted average field strength is listed in Section 15.209. A pre-amp is necessary for this measurement. For measurement above 1 GHz, set RBW = 1MHz, VBW = 10 Hz, Sweep: Auto. If the emission is pulsed, modify the unit for continuous operation; use the settings shown above, then correct the reading by subtracting the peak-average correction factor, derived from the appropriate duty cycle calculation.

The EUT was placed on a turntable. Below 1 GHz, the table height is 80 cm above the reference ground plane. Above 1 GHz, the table height is 1.5 m. The turntable rotated 360 degrees to determine the position of the maximum emission level. The EUT was set 3 meters away from the receiving antenna, which was mounted on an antenna tower. The antenna moved up and down between 1 meter and 4 meters to find out the maximum emission level. Broadband antenna (Calibrated Bilog Antenna) or Horn antenna was used as receiving antenna. Both horizontal and vertical polarizations of the antenna were set on measurement. In order to find the maximum emission, all of the interference cables were manipulated according to ANSI C63.10: 2013 requirements during radiated emission test.

The bandwidth of Test Receiver R&S ESCI was set at 120 kHz from 30MHz to 1000MHz.

The bandwidth of the VBW was set at 1MHz and RBW was set at 1MHz for peak emission measurement above 1GHz and 1MHz RBW, 10Hz VBW for average emission above 1GHz for Spectrum Agilent N9010A.

The frequency range from 30 MHz to 25 GHz (Up to 10th harmonics from fundamental frequency) was checked.

All the test results are listed in Sec.3.7.

3.7 Test Results

<PASS>

The frequency and amplitude of the highest radiated emission relative the limit is reported. All the emissions not reported below are too low against the FCC limit.

No.	Operation	Channel	Frequency	Data Page	
1.	Transmitting	Worst case emission < 1GHz		P12	
2.		11	2405 MHz	P13-14	
3.		20	2450 MHz		
4.		26	2480 MHz		
5.	Receiving	--		P17	
6.	Transmitting	Cabinet Emission		P18	
7.		11	2405 MHz	Restricted Frequency bands	P20
8.		26	2480 MHz		P21

NOTE 1 – Level = Read Level + Antenna Factor + Cable Loss (<1GHz)

NOTE 2 – Level = Read Level + Antenna Factor + Cable Loss - Preamp Factor (>1GHz)

NOTE 3 – All reading are Quasi-Peak values below or equal to 1GHz, Peak and Average values above 1GHz.

For above 1GHz test, if the peak measured value complies with the average limit, it is unnecessary to perform an average measurement.

Worst case emission < 1GHz

EUT : LED MODULE Temperature : 24°C
 Model No. : 2AGBW324131254491X Humidity : 50%RH
 Test Mode : Transmitting Date of Test : Aug. 12, 2016

Polarization	Frequency (MHz)	Meter Reading dB (μ V)	Antenna Factor (dB/m)	Cable Loss (dB)	Emission Level dB (μ V/m)	Limits dB (μ V/m)	Margin (dB)	Remark
Horizontal	60.07	12.98	6.2	0.88	20.06	40	19.94	QP
	76.56	14.54	8.78	1.04	24.36	40	15.64	
	124.09	7.17	13.04	1.49	21.7	43.5	21.8	
	219.15	11.59	10.44	2.04	24.07	46	21.93	
	297	11	13.7	2.56	27.26	46	18.74	
	736.16	2.41	19.97	3.6	25.98	46	20.02	
Vertical	68.8	14.46	7.12	0.92	22.5	40	17.5	QP
	243.4	12.43	12.1	2.13	26.66	46	19.34	
	297	11.8	13.7	2.56	28.06	46	17.94	
	479.11	7.22	17.5	2.9	27.62	46	18.38	
	725.49	5.17	20.03	3.59	28.79	46	17.21	
	806	3.85	20.6	3.78	28.23	46	17.77	

TEST ENGINEER: BYRON WU

Radiated Emission > 1GHz

EUT : LED MODULE Temperature : 24°C

Model No. : 2AGBW324131254491X Humidity : 50%RH

Test Mode : Transmitting Date of Test : Aug. 12, 2016

Ch11 (2405MHz)

Polarization	Frequency (MHz)	Meter Reading dB (μ V)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Emission Level dB (μ V/m)	Limits dB (μ V/m)	Margin (dB)	Remark
Horizontal	1080.091	52.72	23.91	4.32	36.34	44.61	74	29.39	Peak
	1147.936	50.72	24.22	3.86	36.22	42.58	74	31.42	Peak
	1296.677	51.17	24.85	3.65	35.98	43.69	74	30.31	Peak
	1961.484	49.22	27.37	4.39	35.14	45.84	74	28.16	Peak
	2453.883	47.1	28.33	4.86	35.15	45.14	74	28.86	Peak
	2862.693	46.48	29.97	5.54	35.19	46.8	74	27.2	Peak
Vertical	1087.86	50.97	23.93	4.2	36.33	42.77	74	31.23	Peak
	1269.095	53.29	24.73	3.61	36.02	45.61	74	28.39	Peak
	1488.503	52.41	25.57	3.86	35.7	46.14	74	27.86	Peak
	1764.712	51.55	26.68	4.13	35.36	47	74	27	Peak
	1868.851	53.2	27.04	4.27	35.24	49.27	74	24.73	Peak
	2626.779	45.42	28.97	5.11	35.17	44.33	74	29.67	Peak

Ch20 (2450MHz)

Polarization	Frequency (MHz)	Meter Reading dB (μ V)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Emission Level dB (μ V/m)	Limits dB (μ V/m)	Margin (dB)	Remark
Horizontal	1062.814	49.85	23.82	4.43	36.37	41.73	74	32.27	Peak
	1235.441	51.22	24.59	3.56	36.07	43.3	74	30.7	Peak
	1336.782	50.6	25	3.69	35.91	43.38	74	30.62	Peak
	1630.93	50.25	26.15	4.03	35.52	44.91	74	29.09	Peak
	2007.709	46.77	27.51	4.47	35.1	43.65	74	30.35	Peak
	2325.462	48.26	28.11	4.75	35.14	45.98	74	28.02	Peak
Vertical	1158.266	48.03	24.26	3.75	36.2	39.84	74	34.16	Peak
	1542.811	47.27	25.79	3.95	35.63	41.38	74	32.62	Peak
	1926.652	48.27	27.25	4.35	35.18	44.69	74	29.31	Peak
	2247.628	47.38	27.97	4.69	35.13	44.91	74	29.09	Peak
	2453.883	45.59	28.33	4.86	35.15	43.63	74	30.37	Peak
	2796.783	43.5	29.7	5.47	35.18	43.49	74	30.51	Peak

Ch26 (2480MHz)

Polarization	Frequency (MHz)	Meter Reading dB (μ V)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Emission Level dB (μ V/m)	Limits dB (μ V/m)	Margin (dB)	Remark
Horizontal	1191.952	49.63	24.42	3.52	36.14	41.43	74	32.57	Peak
	1607.719	47.37	26.06	4.03	35.54	41.92	74	32.08	Peak
	2025.777	44.41	27.55	4.47	35.1	41.33	74	32.67	Peak
	2211.673	44.29	27.91	4.64	35.12	41.72	74	32.28	Peak
	2693.504	45.15	29.27	5.25	35.17	44.5	74	29.5	Peak
	2919.675	44.58	30.2	5.69	35.19	45.28	74	28.72	Peak
Vertical	1160.344	48.83	24.26	3.75	36.2	40.64	74	33.36	Peak
	1365.835	49.95	25.12	3.72	35.87	42.92	74	31.08	Peak
	1619.283	48.24	26.11	4.03	35.53	42.85	74	31.15	Peak
	1816.036	48.09	26.85	4.19	35.3	43.83	74	30.17	Peak
	2095.928	47.47	27.69	4.55	35.11	44.6	74	29.4	Peak
	2516.216	49.13	28.47	4.89	35.16	47.33	74	26.67	Peak

TEST ENGINEER: BYRON WU

EUT : LED MODULE Temperature : 24°C

Model No. : 2AGBW324131254491X Humidity : 50%RH

Test Mode : Receiving Date of Test : Aug. 12, 2016

Polarization	Frequency (MHz)	Meter Reading dB (μ V)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Emission Level dB (μ V/m)	Limits dB (μ V/m)	Margin (dB)	Remark
Horizontal	84.32	12.98	9.74	1.13	--	23.85	40	16.15	QP
	202.66	12.48	9.75	1.98	--	24.21	43.5	19.29	
	293.07	8.8	13.6	2.52	--	24.92	46	21.08	
	380.17	5.73	16.5	2.69	--	24.92	46	21.08	
	479.11	5.2	17.5	2.9	--	25.6	46	20.4	
	806	0.29	20.6	3.78	--	24.67	46	21.33	
	1168.69	52.59	24.31	3.63	36.18	44.35	74	29.65	
	1441.262	49.14	25.39	3.81	35.76	42.58	74	31.42	
	1727.174	50.33	26.53	4.09	35.4	45.55	74	28.45	
	1899.233	48.42	27.16	4.31	35.21	44.68	74	29.32	
Vertical	2164.628	46.32	27.82	4.61	35.12	43.63	74	30.37	PK
	2502.727	46.43	28.4	4.89	35.16	44.56	74	29.44	
	51.34	15.98	7.27	0.82	--	24.07	40	15.93	
	191.02	14.68	10.27	1.92	--	26.87	43.5	16.63	
	300.63	13.54	13.84	2.59	--	29.97	46	16.03	
	481.05	6.46	17.52	2.9	--	26.88	46	19.12	
	800.18	2.65	20.6	3.68	--	26.93	46	19.07	
	908.82	2.12	21.5	4.56	--	28.18	46	17.82	
	1211.329	51.33	24.49	3.54	36.11	43.25	74	30.75	
	1454.232	51.82	25.45	3.84	35.75	45.36	74	28.64	
	1702.593	51.23	26.44	4.07	35.43	46.31	74	27.69	PK
	1865.506	49.85	27.04	4.27	35.25	45.91	74	28.09	
	2304.722	48.72	28.07	4.72	35.13	46.38	74	27.62	
	2872.97	44.83	30	5.61	35.19	45.25	74	28.75	

TEST ENGINEER: BYRON WU

Emissions in restricted frequency bands

Using Antenna-port conducted measurements:

According to the ANSI C63.10-2013 Sec. 11.12.2, antenna-port conducted measurements is also be permitted as an alternative to radiated measurements in the restricted frequency bands.

The transmitter output was connected to the Test Receiver. The EUT was set to transmit continuously ($\geq 98\%$ duty cycle).

The test procedure is defined in ANSI C63.10-2013
 (11.12.2.4 Peak power measurement procedure & the 11.12.2.5 Average power measurement procedures (11.12.2.5.1 Trace averaging with continuous EUT transmission at full power)):

Note1 – The additional radiated test was performed to prove that the cabinet emissions (transmit antenna be replaced with a termination matching the impedance of the antenna) also comply with the applicable limits.

Cabinet Emission (Radiated with antenna terminated):

Polarization	Frequency (MHz)	Meter Reading dB (μ V)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Emission Level dB (μ V/m)	Limits dB (μ V/m)	Margin (dB)	Remark
Horizontal	2365.319	45.51	28.21	4.81	35.14	43.39	74.00	30.61	Peak
	2388.807	45.96	28.21	4.81	35.14	43.84	74.00	30.16	Peak
	2483.497	47.84	28.38	4.86	35.15	45.93	74.00	28.07	Peak
	2494.319	47.44	28.38	4.89	35.15	45.56	74.00	28.44	Peak
Vertical	2366.634	43.88	28.21	4.81	35.14	41.76	74.00	32.24	Peak
	2389.004	46.75	28.21	4.81	35.14	44.63	74.00	29.37	Peak
	2483.958	47.38	28.38	4.86	35.15	45.47	74.00	28.53	Peak
	2494.719	46.64	28.38	4.89	35.15	44.76	74.00	29.24	Peak

The frequency range 2310-2390MHz & 2483.5-2500MHz were tested, and the maximum emission frequency was recorded above.

Note2 – The antenna gain (0dBi, as 2dBi) and cable loss (2dB) were set as offset (4dB) in the spectrum.

(According to ANSI C63.10-2013 Sec. 11.12.2.6, when determining the EIRP from the measured conducted power, the upper bound on antenna gain for a device with a signal RF output shall be selected as the maximum in-band gain of the antenna across all operating bands, or 2 dBi, whichever is greater.)

Note3 – $EIRP = E + 20\log D - 104.8$

Where: EIRP = equivalent isotropic radiated power in dBm,


E = electric field strength in $\text{dB}\mu\text{V/m}$,

D = specified measurement distance in meters.


The Average Power limit = -41.2 dBm



The Peak Power limit = -21.2 dBm



AV Result on Ch 11

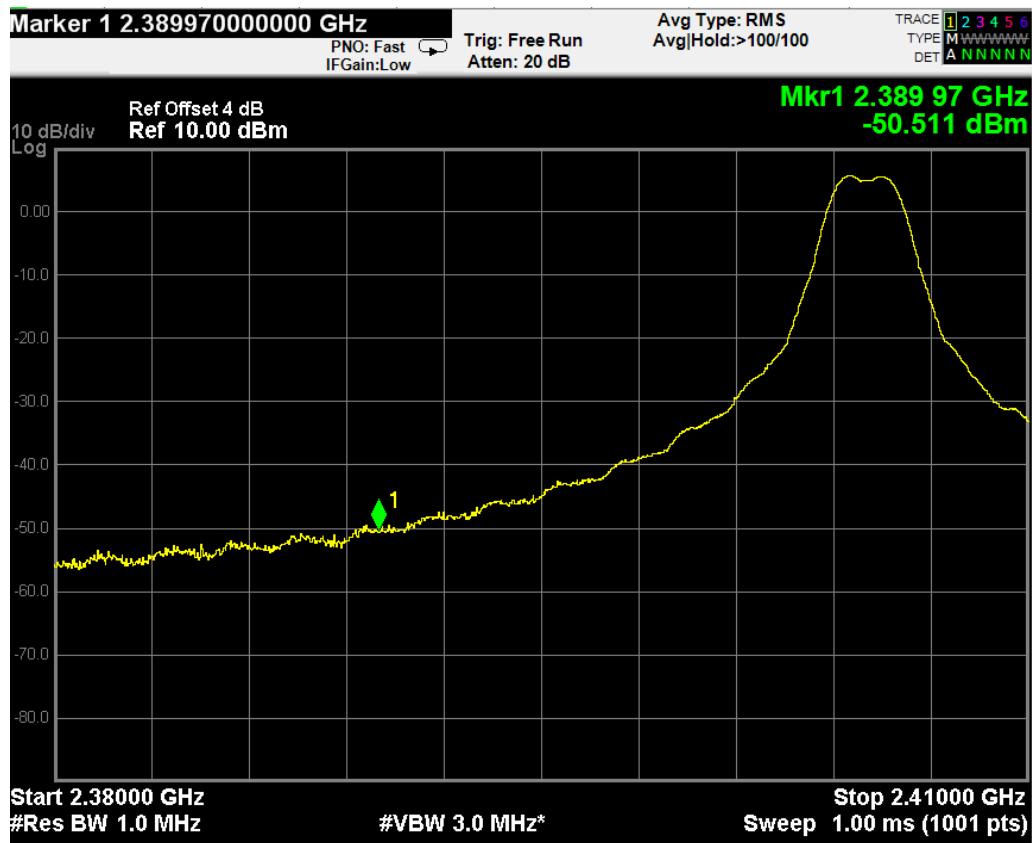

PK Result on Ch 11

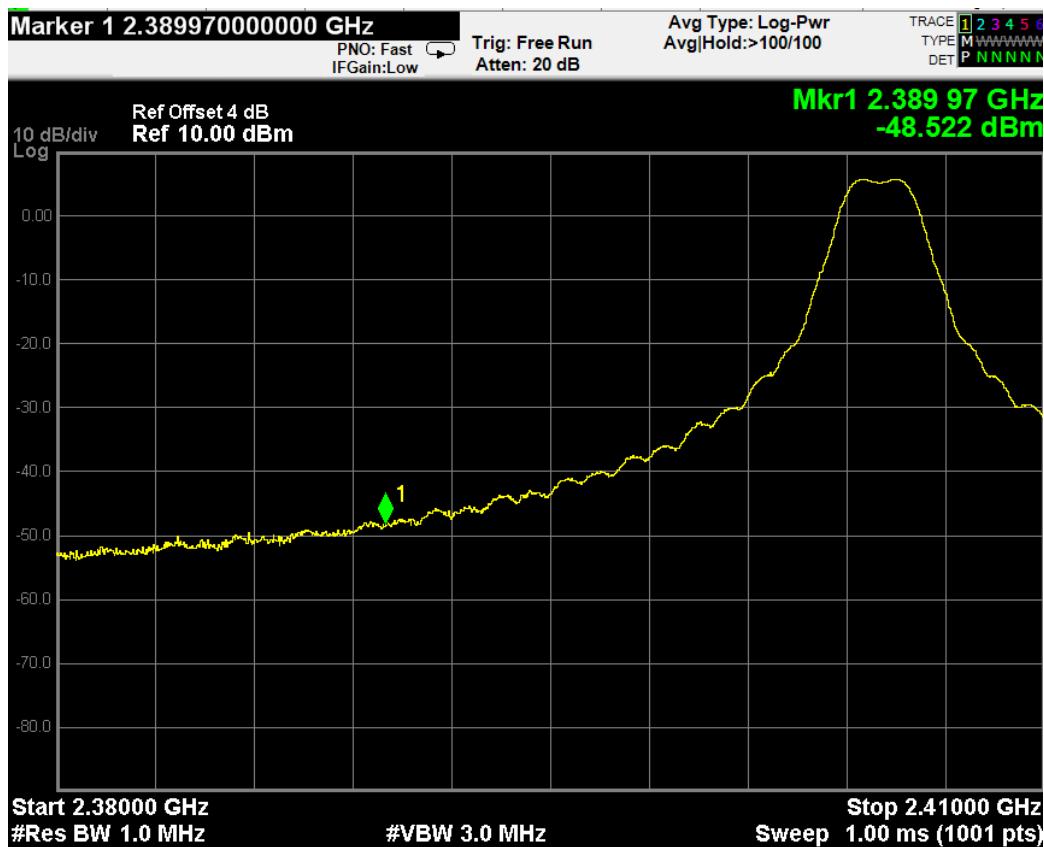

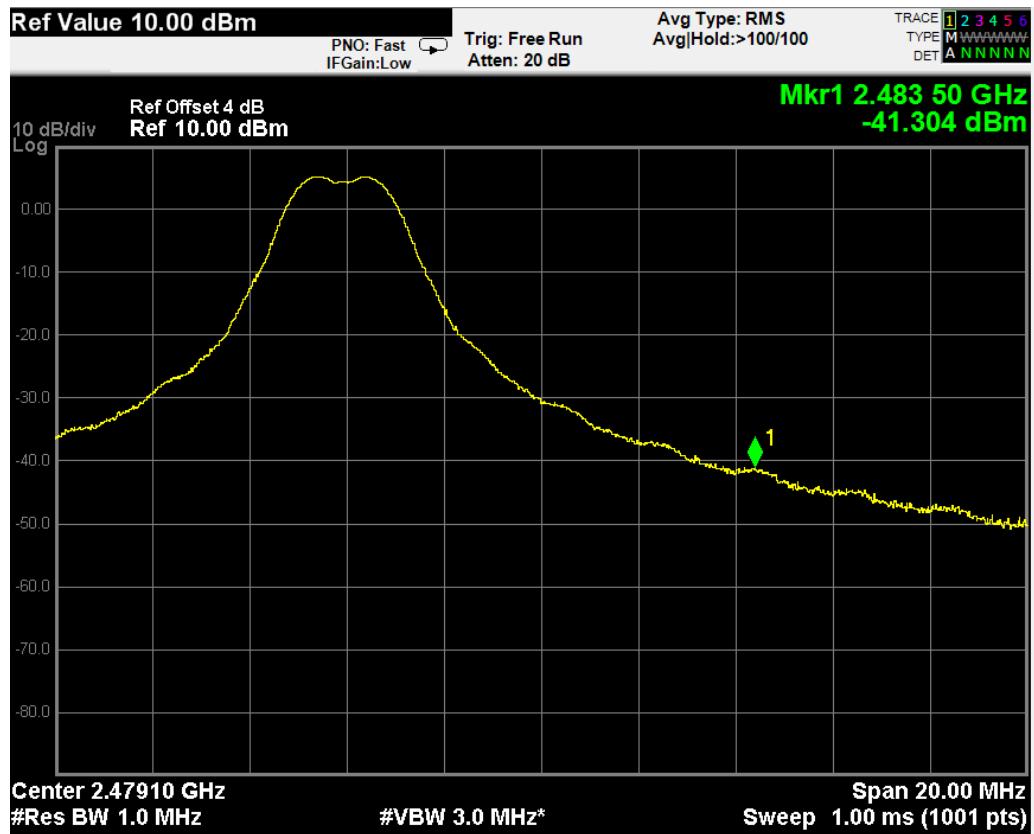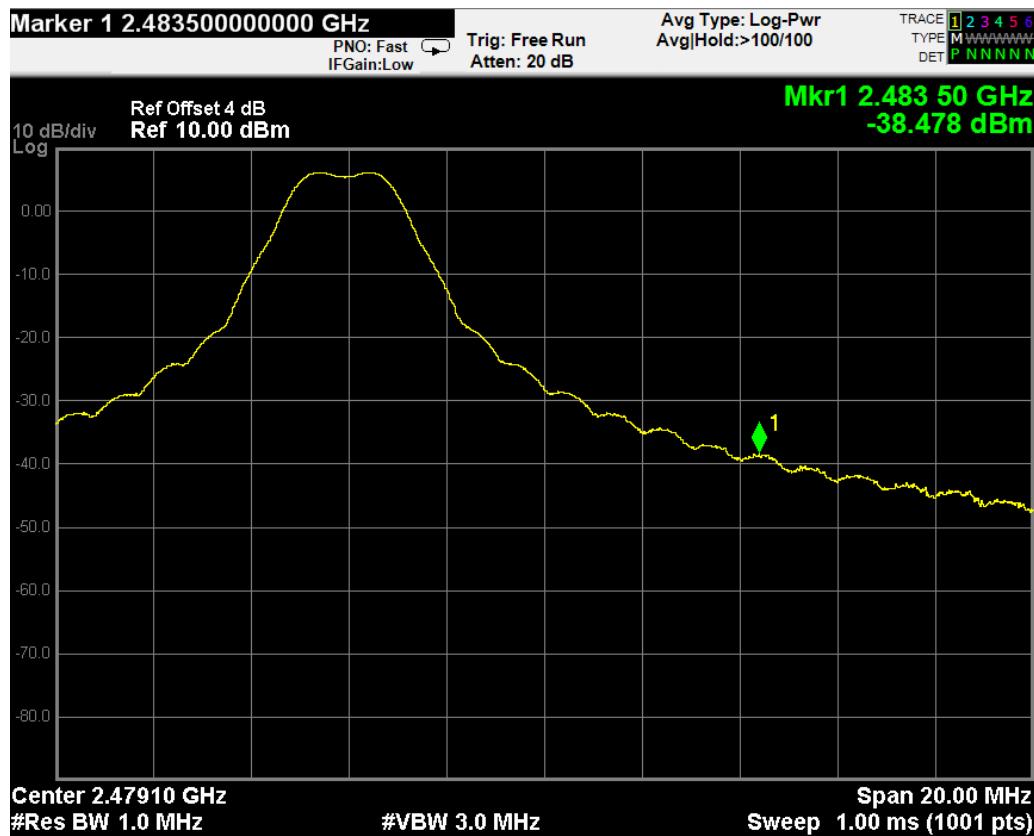AV Result on Ch 25**PK Result on Ch 25**

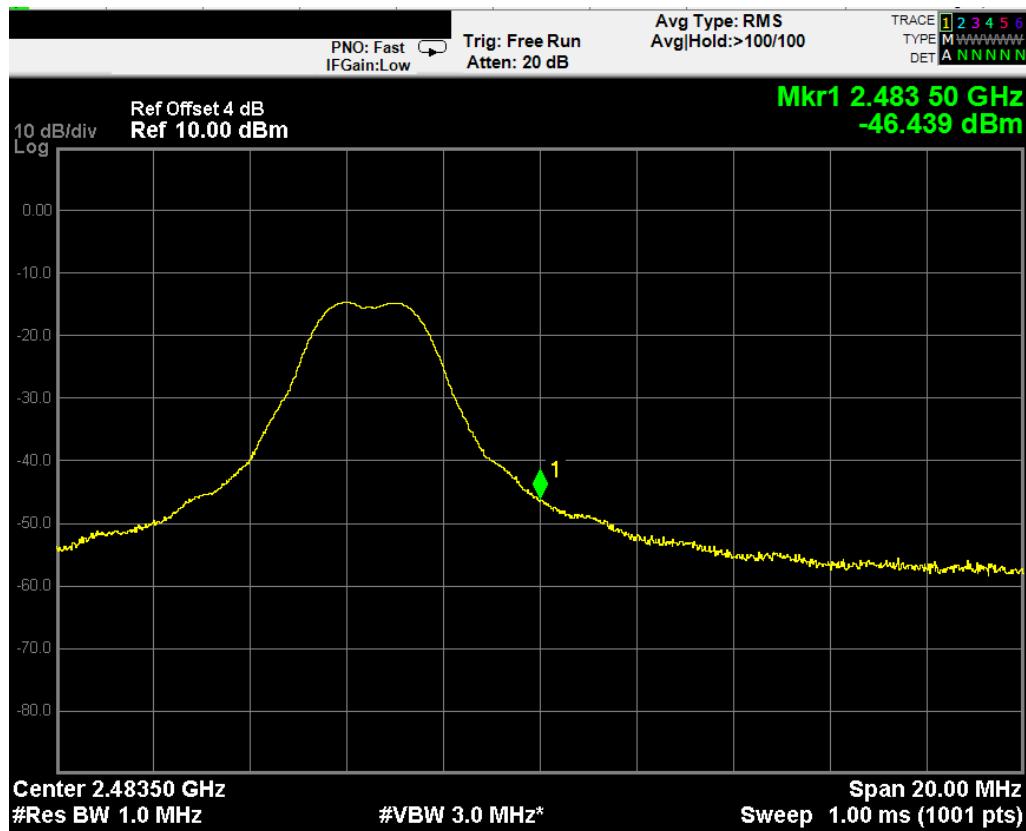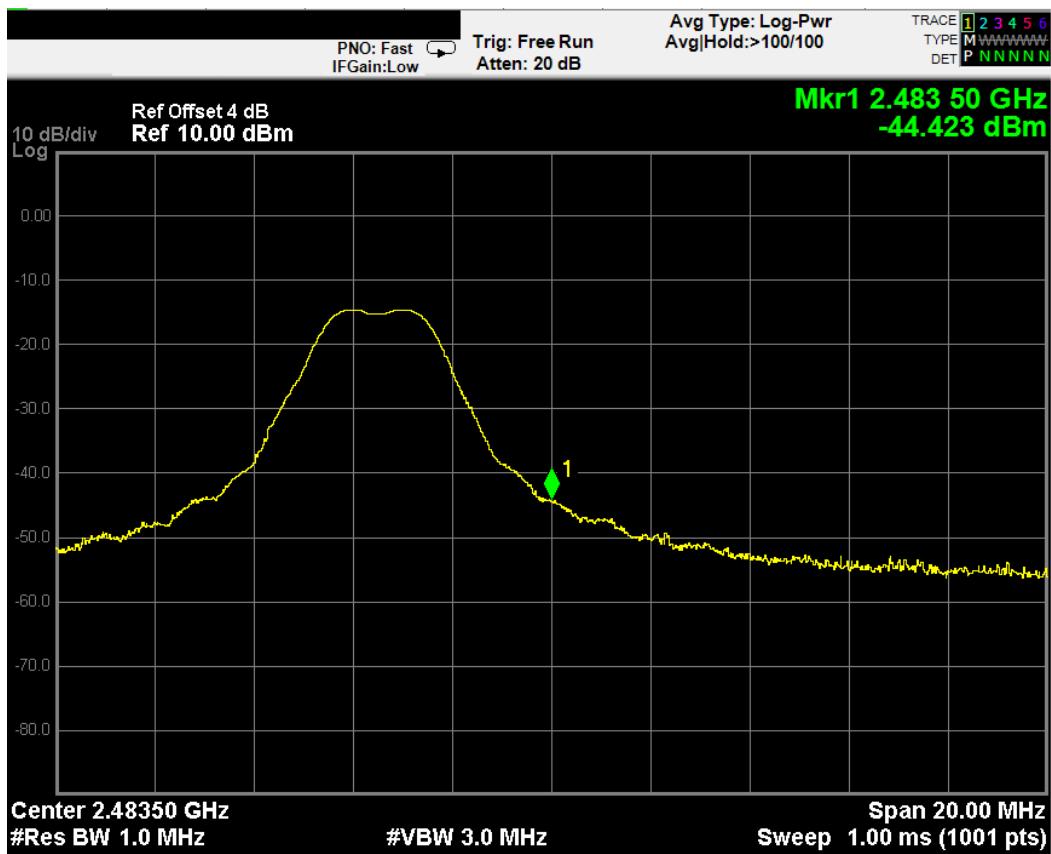AV Result on Ch 26**PK Result on Ch 26**

4 6 dB BANDWIDTH MEASUREMENT

4.1 Test Equipment

The following test equipment was used during the Emission Bandwidth measurement:

Item	Type	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
1.	Spectrum Analyzer	Agilent	N9010A	MY52221182	Jun 12, 2016	Jun 11, 2017

4.2 Block Diagram of Test Setup



4.3 Specification Limits (§15.247(a)(2))

The minimum 6 dB bandwidth shall be at least 500 kHz.

4.4 Operating Condition of EUT

The switch ON/OFF was used to enable the EUT to change the channel one by one.

4.5 Test Procedure

The transmitter output was connected to the spectrum analyzer. The bandwidth of the fundamental frequency was measure by spectrum analyzer with 100 kHz RBW / 300 kHz VBW.

The 6 dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6 dB.

The test procedure is defined in ANSI C63.10-2013 (the 11.8.2 Measurement Procedure “Option 2” was used).



4.6 Test Results


PASSED.

All the test results are attached in next pages.

(Test Date: Aug. 02, 2016 Temperature: 24°C Humidity: 49 %)

Channel	Frequency	6dB Bandwidth
11	2405 MHz	1.469 MHz
20	2450 MHz	1.494 MHz
26	2480 MHz	1.603 MHz

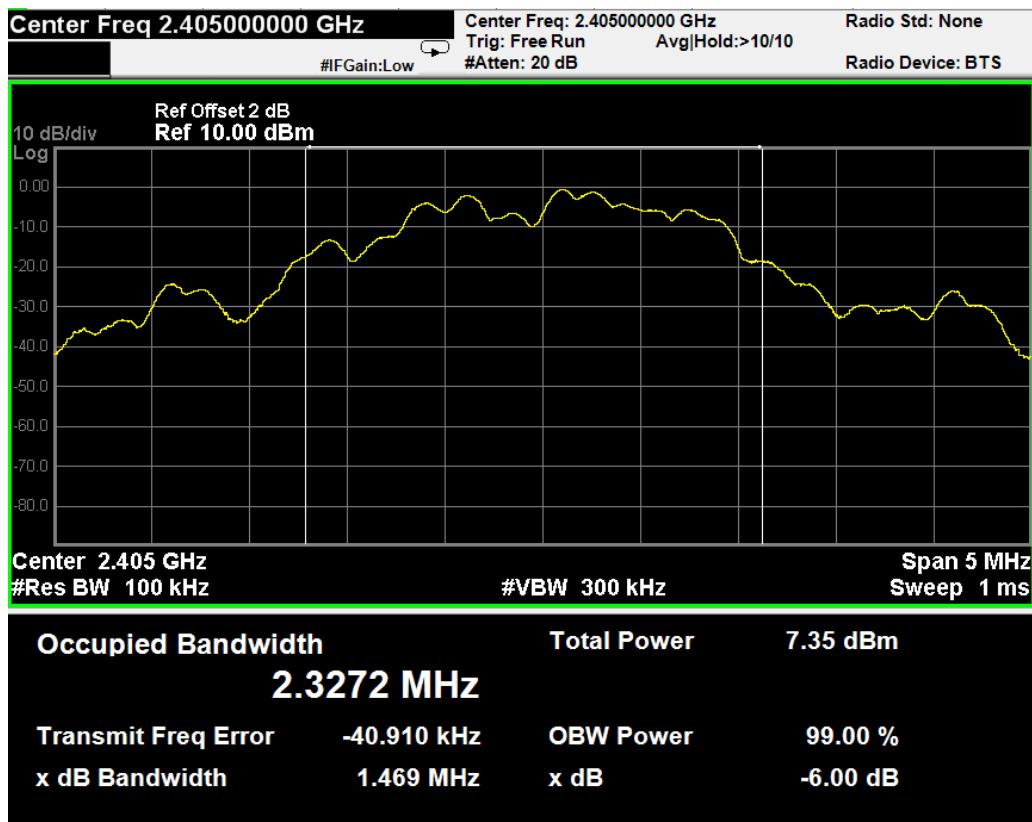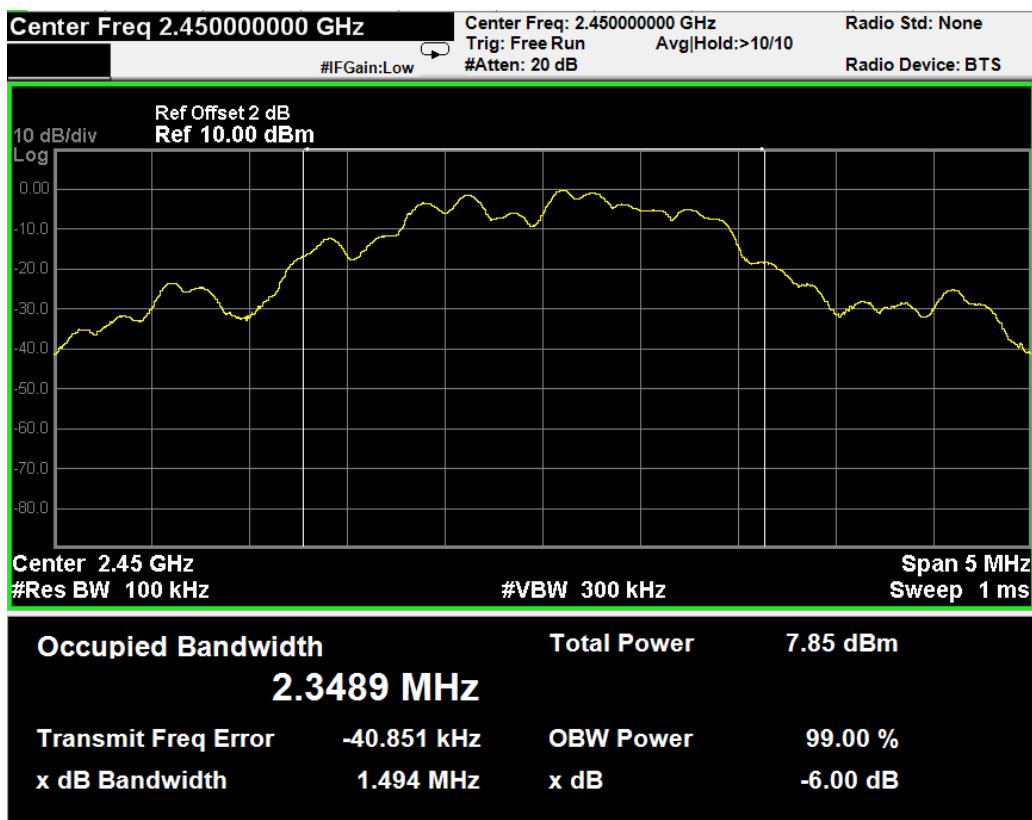Ch 11 (2405 MHz)**Ch 20 (2450 MHz)**

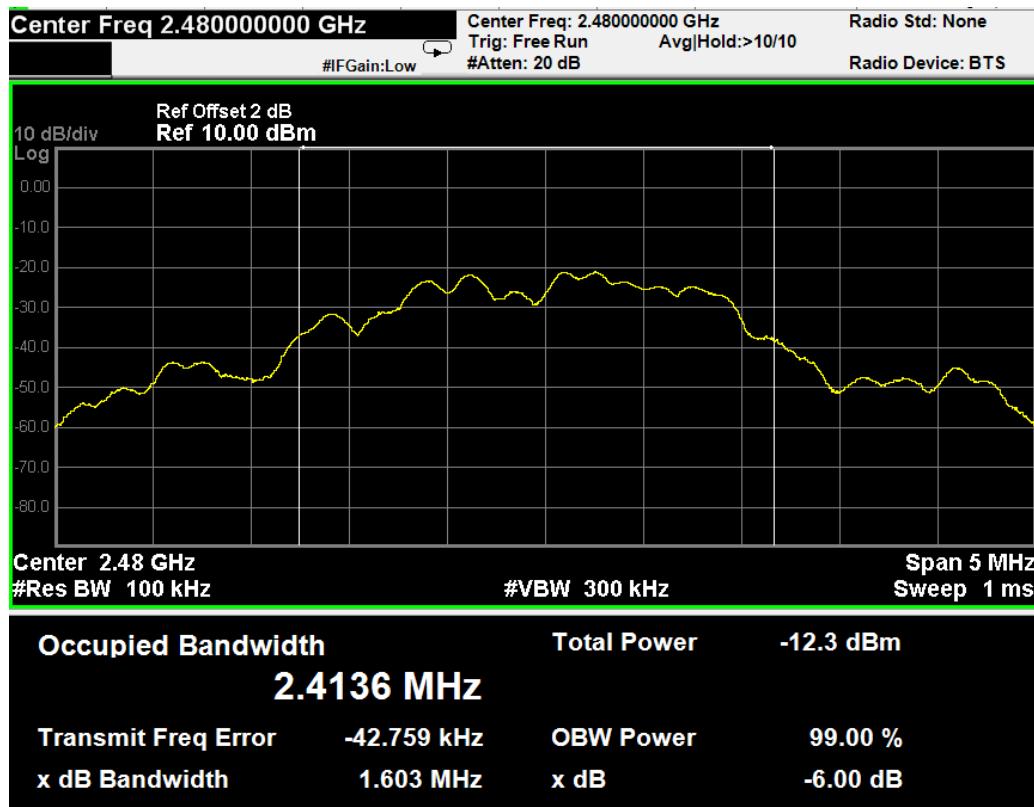Ch 26 (2480 MHz)

5 MAXIMUM PEAK OUTPUT POWER MEASUREMENT

5.1 Test Equipment

The following test equipment was used during the maximum peak output power measurement:

Item	Type	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
1.	Spectrum Analyzer	Agilent	N9010A	MY52221182	Jun 12, 2016	Jun 11, 2017

5.2 Block Diagram of Test Setup

The same as Section. 4.2.

5.3 Specification Limits ((§15.247(b)(3))

The Limits of maximum Peak Output Power for digital modulation in 2400-2483.5 MHz is: 1 Watt. (30 dBm)

5.4 Operating Condition of EUT

The switch ON/OFF was used to enable the EUT to change the channel one by one.

5.5 Test Procedure

The following procedure shall be used when an instrument with a resolution bandwidth that is greater than the DTS bandwidth is available to perform the measurement:

- a) Set the RBW \geq DTS bandwidth.
- b) Set VBW $\geq [3 \times \text{RBW}]$.
- c) Set span $\geq [3 \times \text{RBW}]$.
- d) Sweep time = auto couple.
- e) Detector = peak.
- f) Trace mode = max hold.
- g) Allow trace to fully stabilize.
- h) Use peak marker function to determine the peak amplitude level.



The test procedure is defined in ANSI C63.10-2013 (11.9.1.1 Measurement Procedure “RBW \geq DTS bandwidth” was used).

5.6 Test Results

PASSED. All the test results are listed below.

(Test Date: Aug. 02, 2016 Temperature: 24°C Humidity: 49 %)

Channel	Frequency	Peak Output Power	Limit
11	2405 MHz	3.750 dBm	30 dBm
20	2450 MHz	4.188 dBm	30 dBm
26	2480 MHz	-16.278 dBm	30 dBm

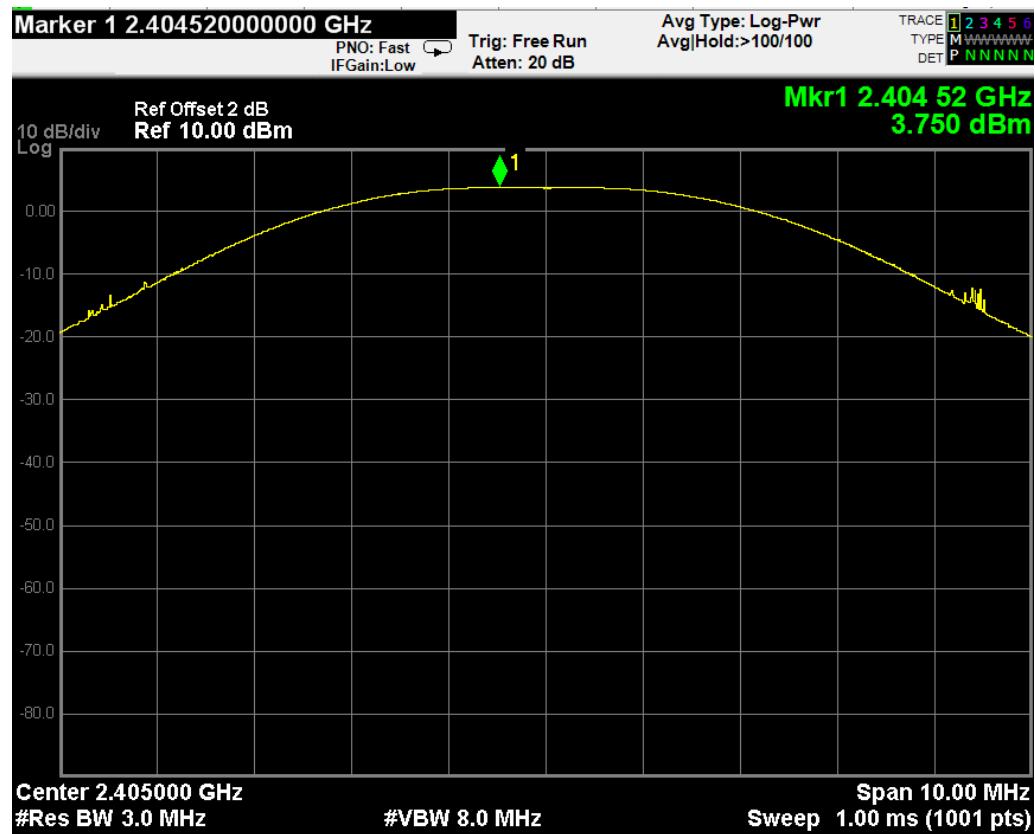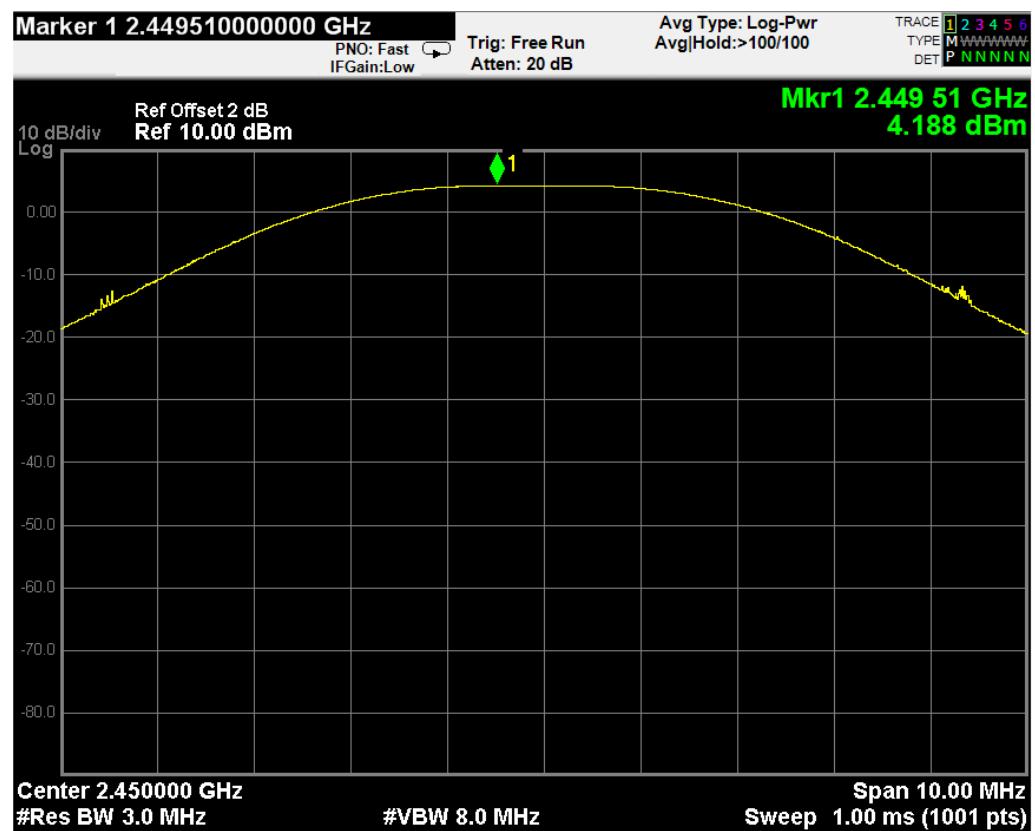Ch 11 (2405 MHz)**Ch 20 (2450 MHz)**

Ch 26 (2480 MHz)

6 EMISSION LIMITATIONS MEASUREMENT

6.1 Test Equipment

The following test equipment was used during the emission limitations test :

Item	Type	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
1.	Spectrum Analyzer	Agilent	N9010A	MY52221182	Jun 12, 2016	Jun 11, 2017

6.2 Block Diagram of Test Setup

The same as Section. 4.2.

6.3 Specification Limits (§15.247(d))

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required.

In addition, radiated emissions which fall in restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (See Section 15.205(c)).(※This test result attaching to Section. 4.7)

6.4 Operating Condition of EUT

The switch ON/OFF was used to enable the EUT to change the channel one by one.

6.5 Test Procedure

The transmitter output was connected to the Test Receiver. Set RBW = 100 kHz, VBW \geq 300 kHz, scan up through 10th harmonic. All harmonics/spurs must be at least 20 dB down from the highest emission level within the authorized band as measured with a 100 kHz RBW.

The test procedure is defined in ANSI C63.10-2013 (11.11.2 Reference level measurement and 11.11.3 Emission level measurement was used).

6.6 Test Results

PASSED.


The test data was attached in the next pages.



(Test Date: Aug. 11, 2016 Temperature: 23°C Humidity: 50 %)



Channel	Data Page
11	P27-29
20	P30-32
26	P33-35

Ch 11 (2405 MHz)

Reference level


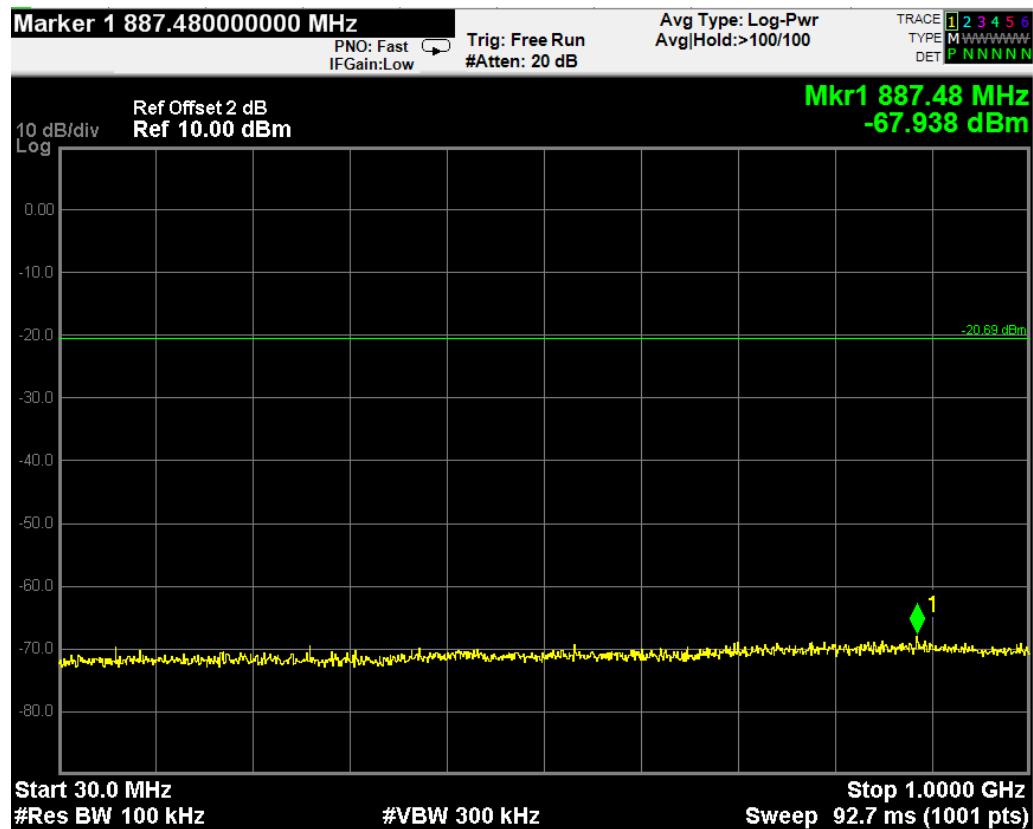


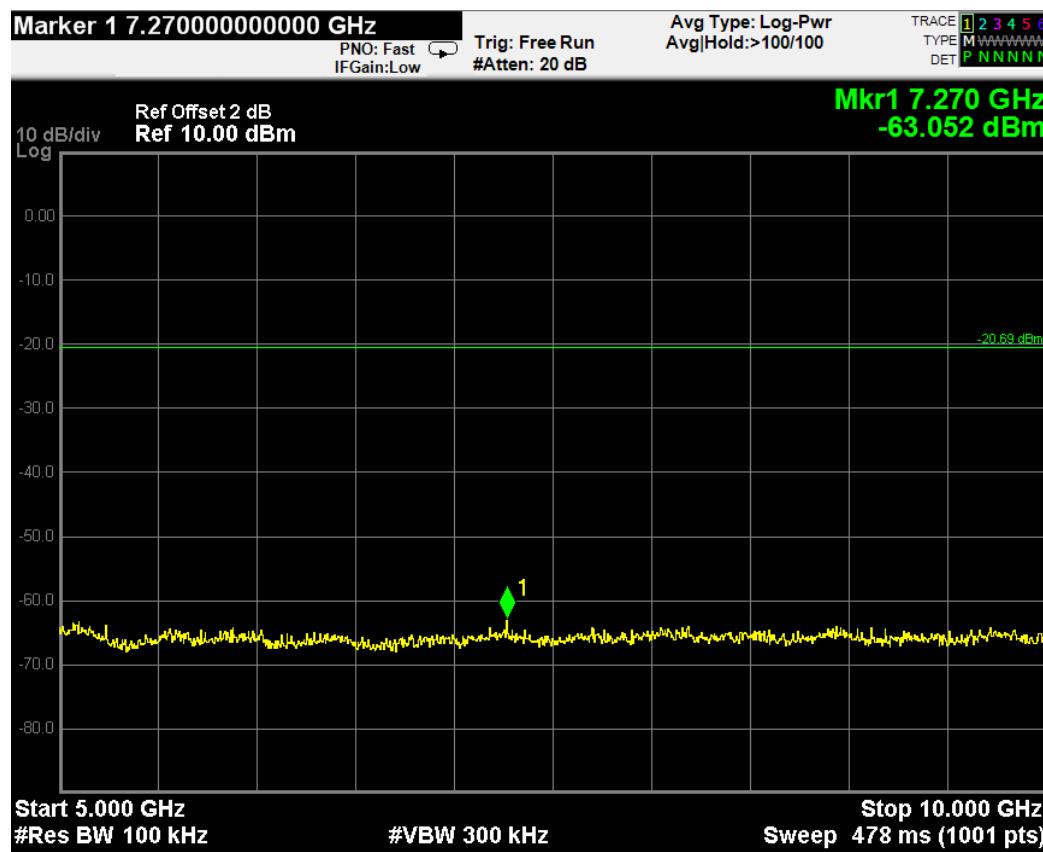
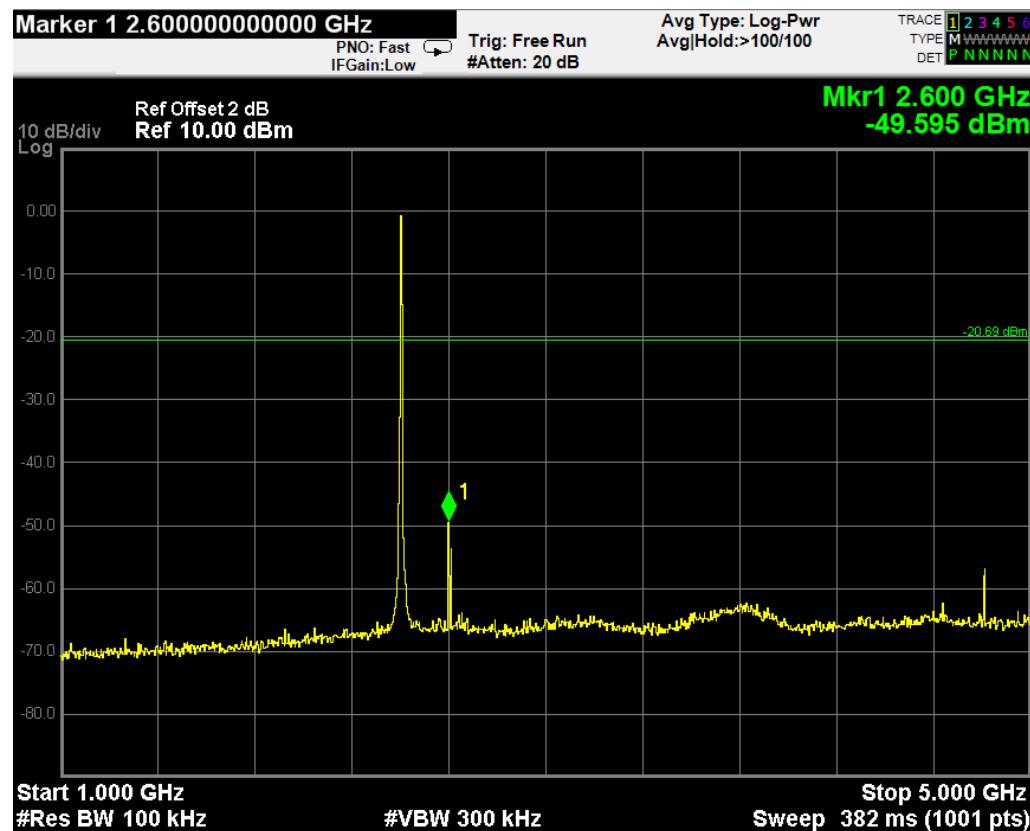


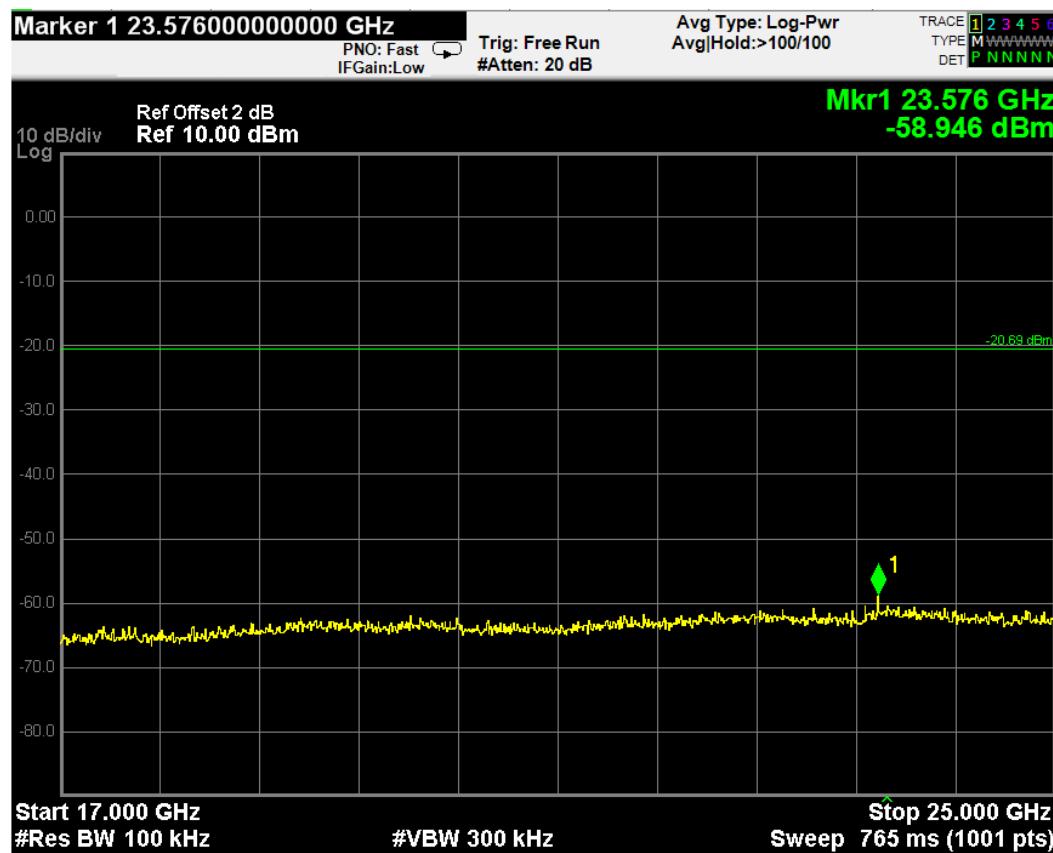
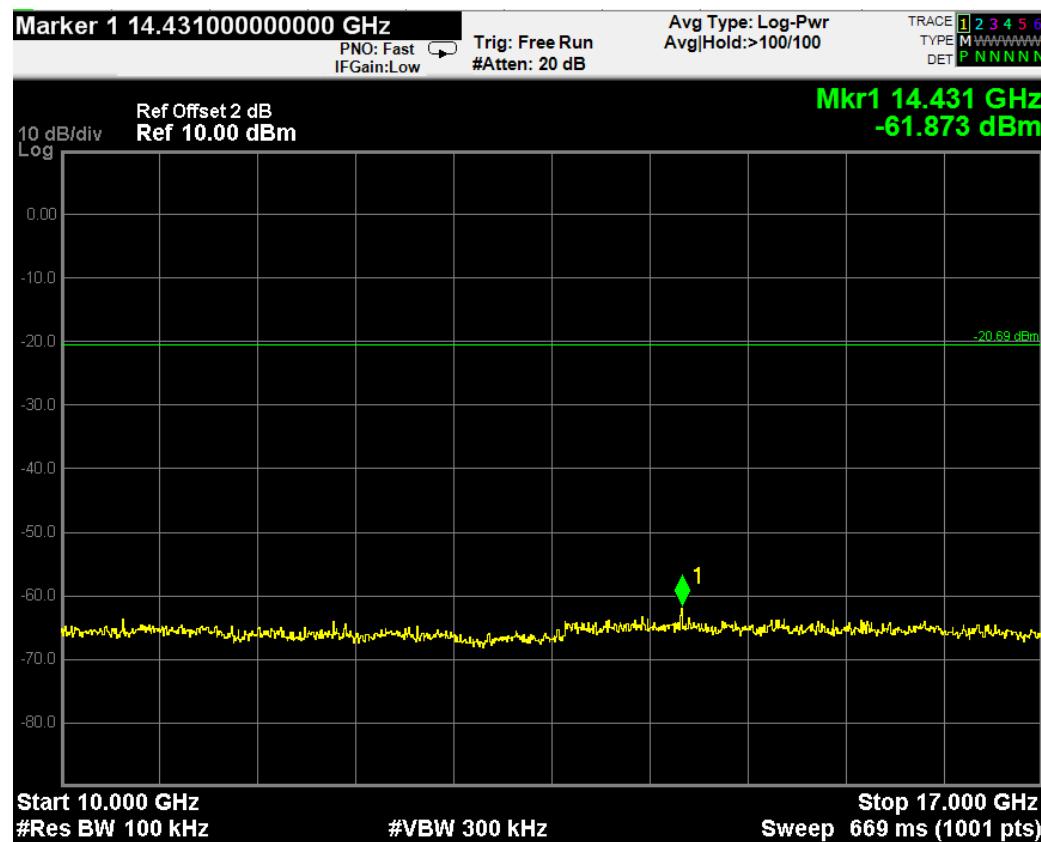


Ch 20 (2450 MHz)

Reference level

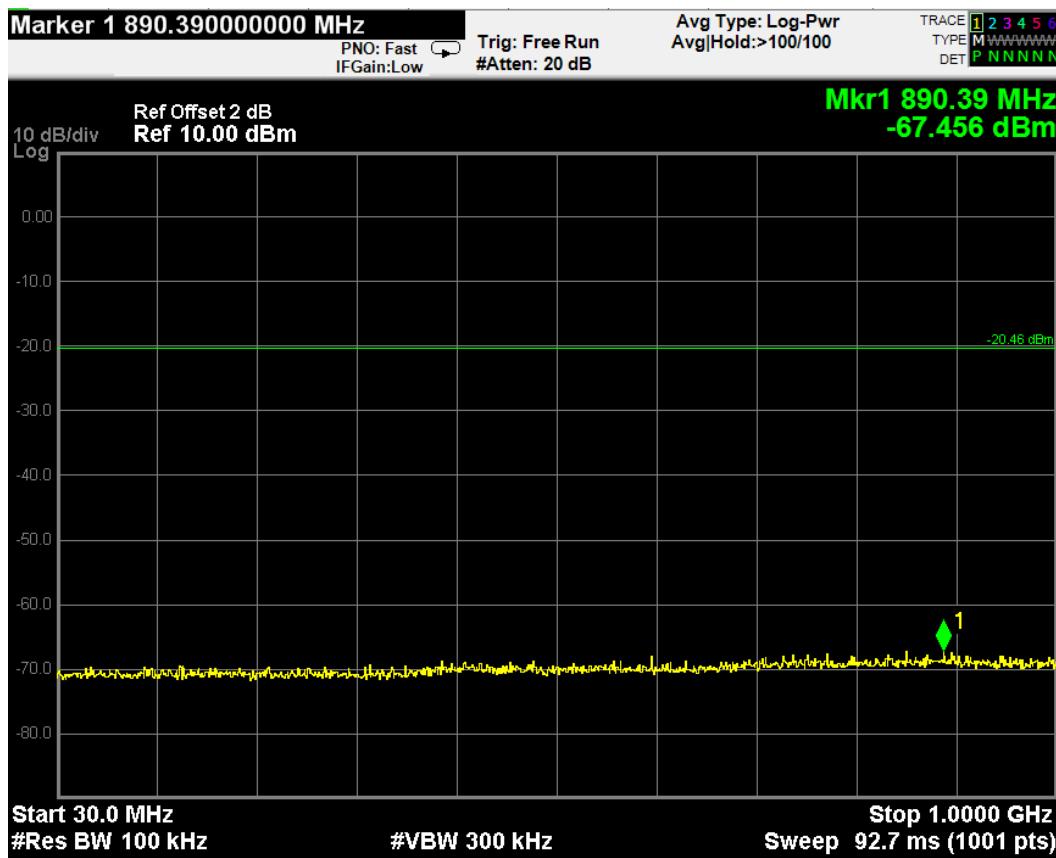
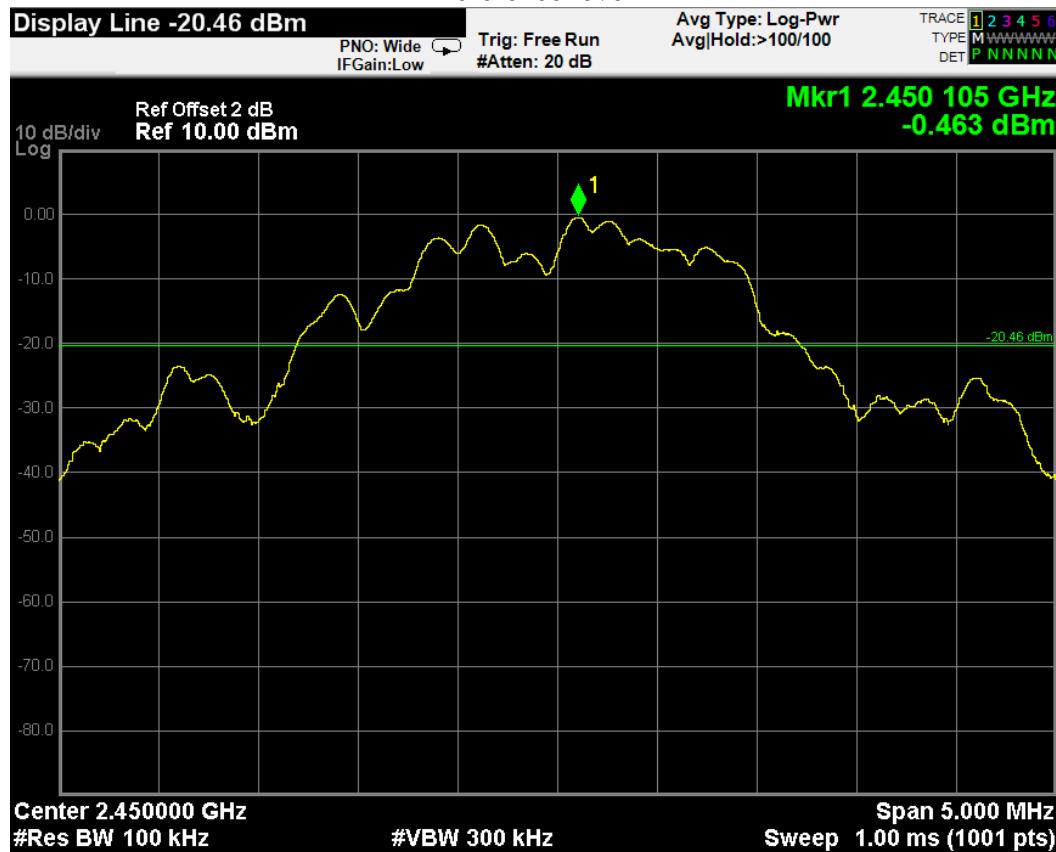


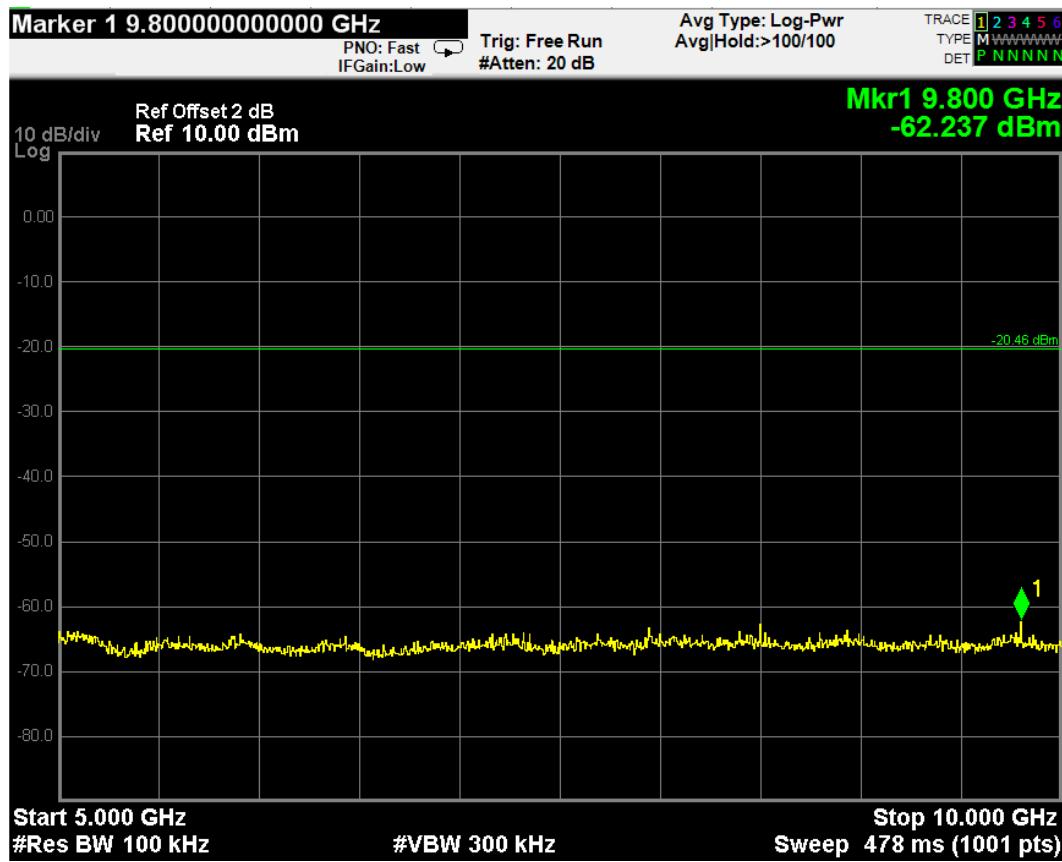
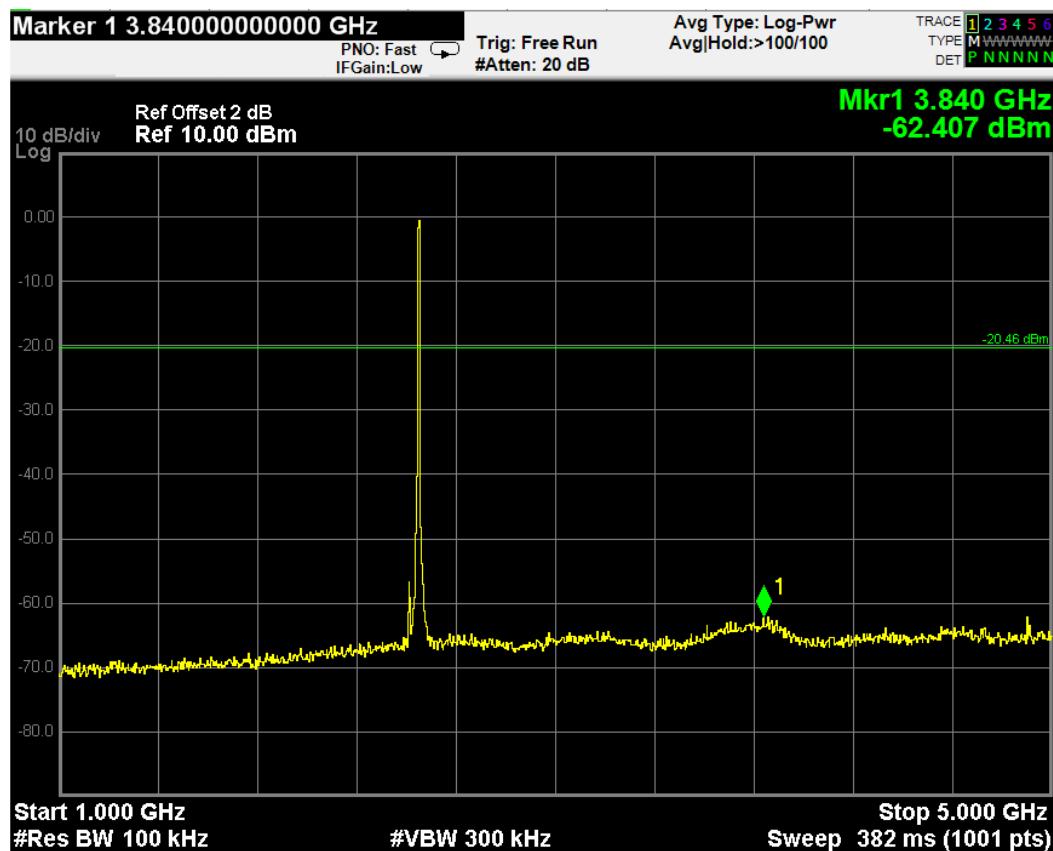


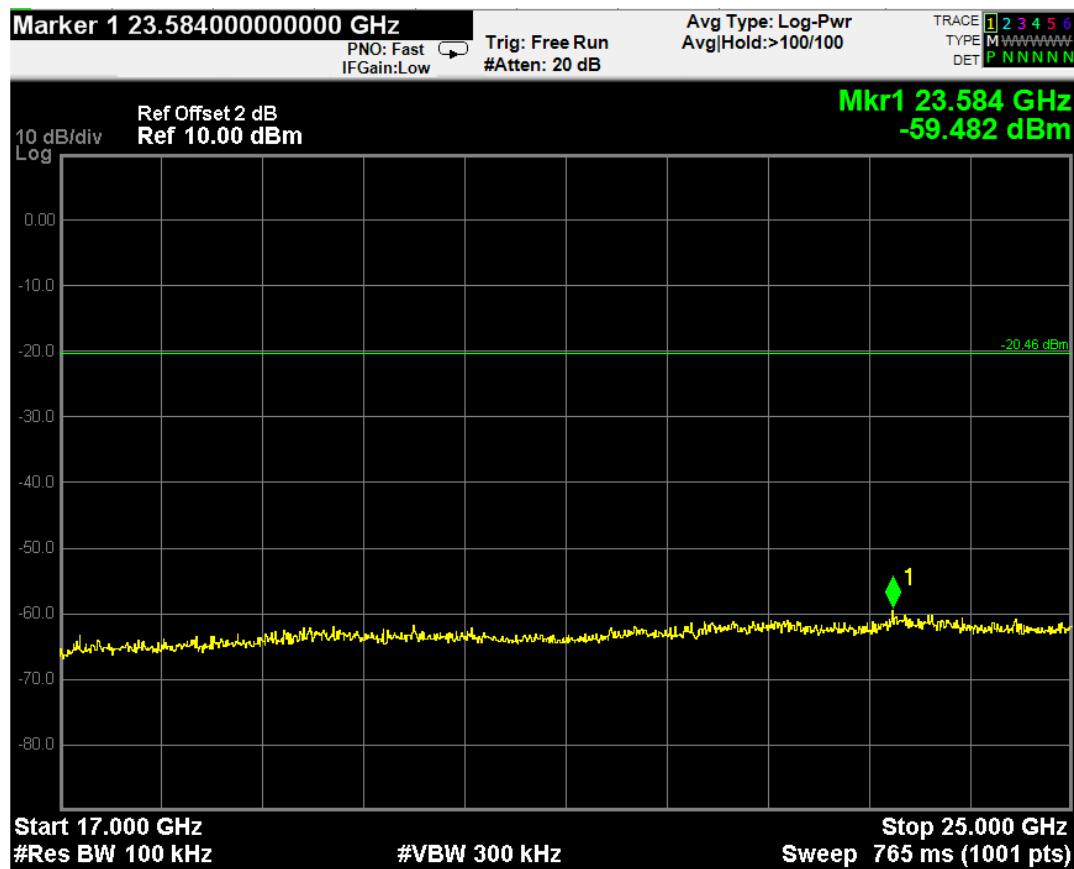
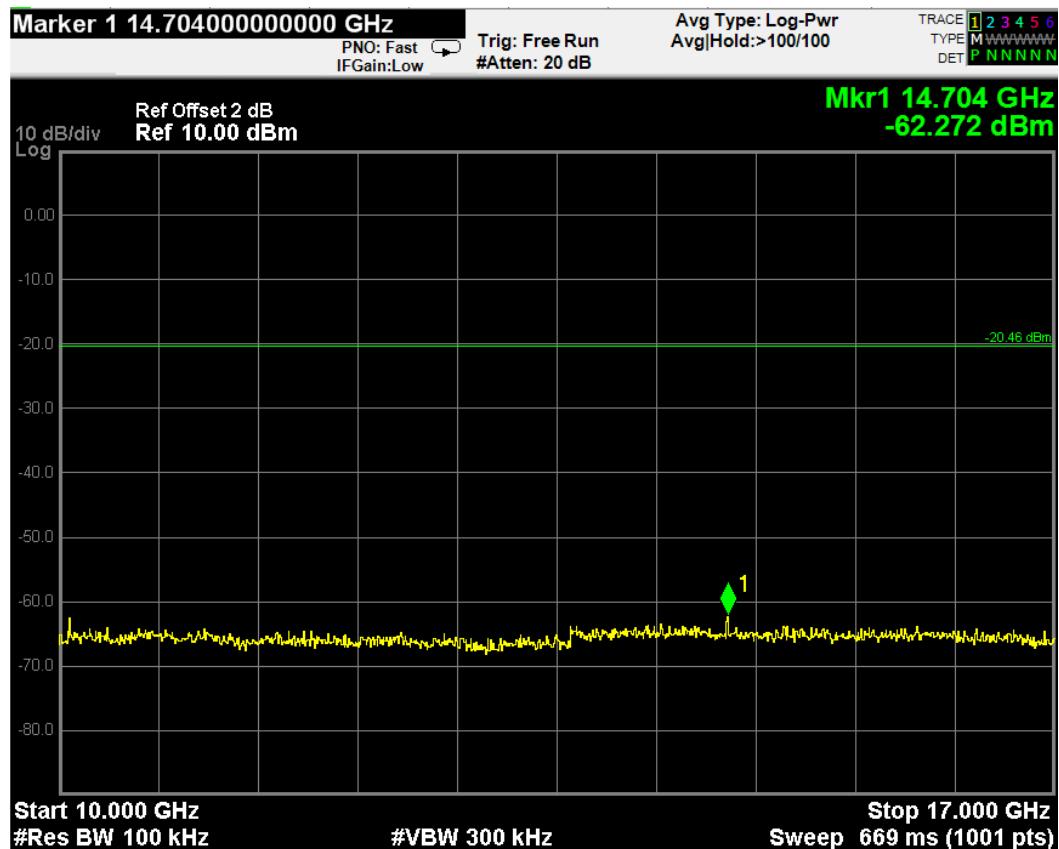


Ch 26 (2480 MHz)

Reference level

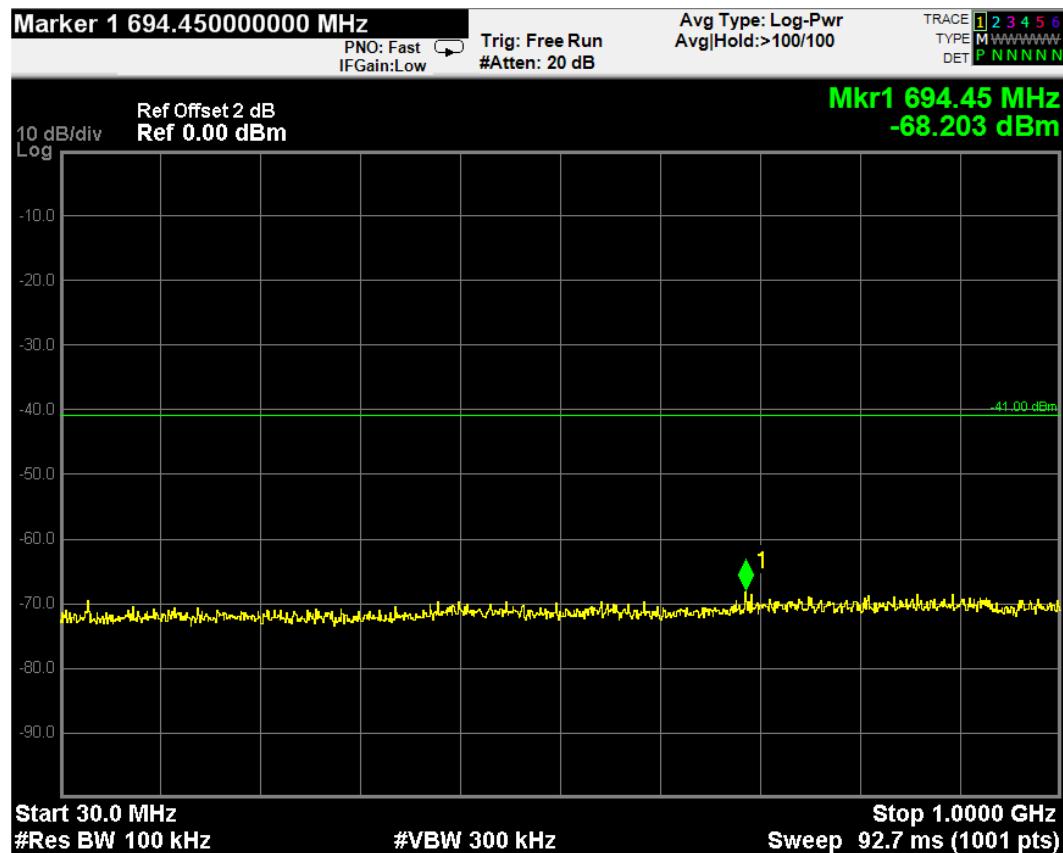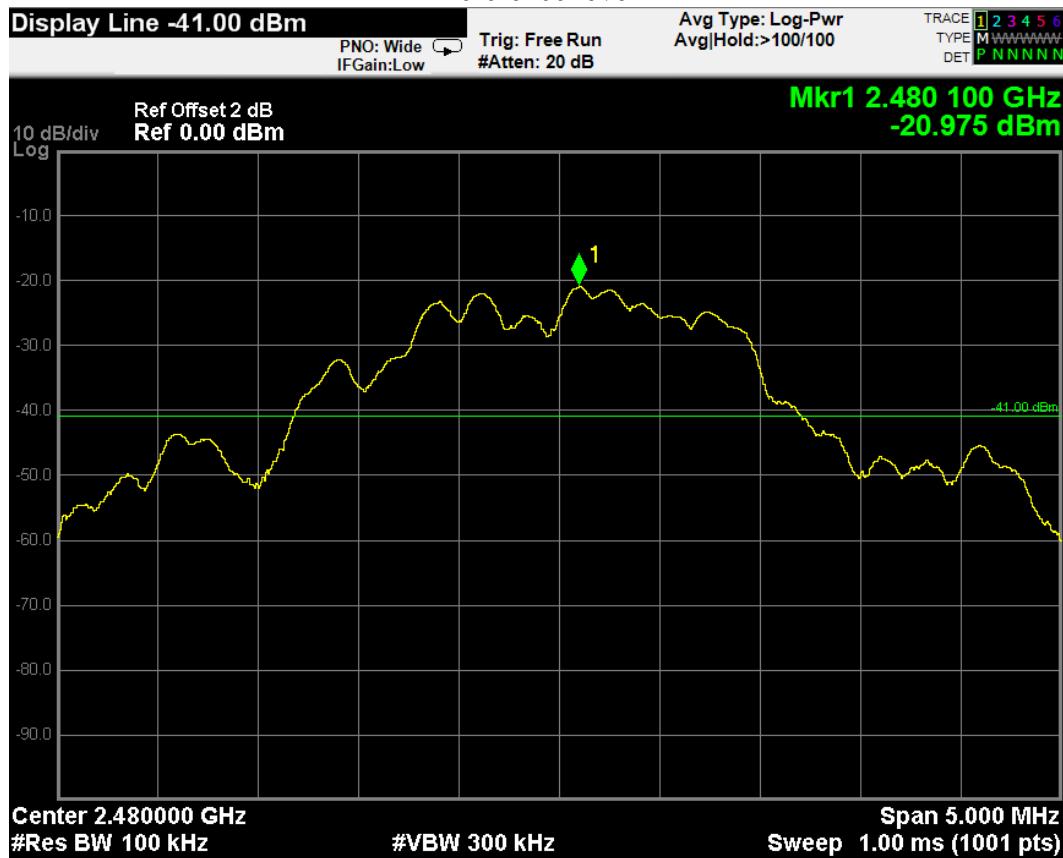

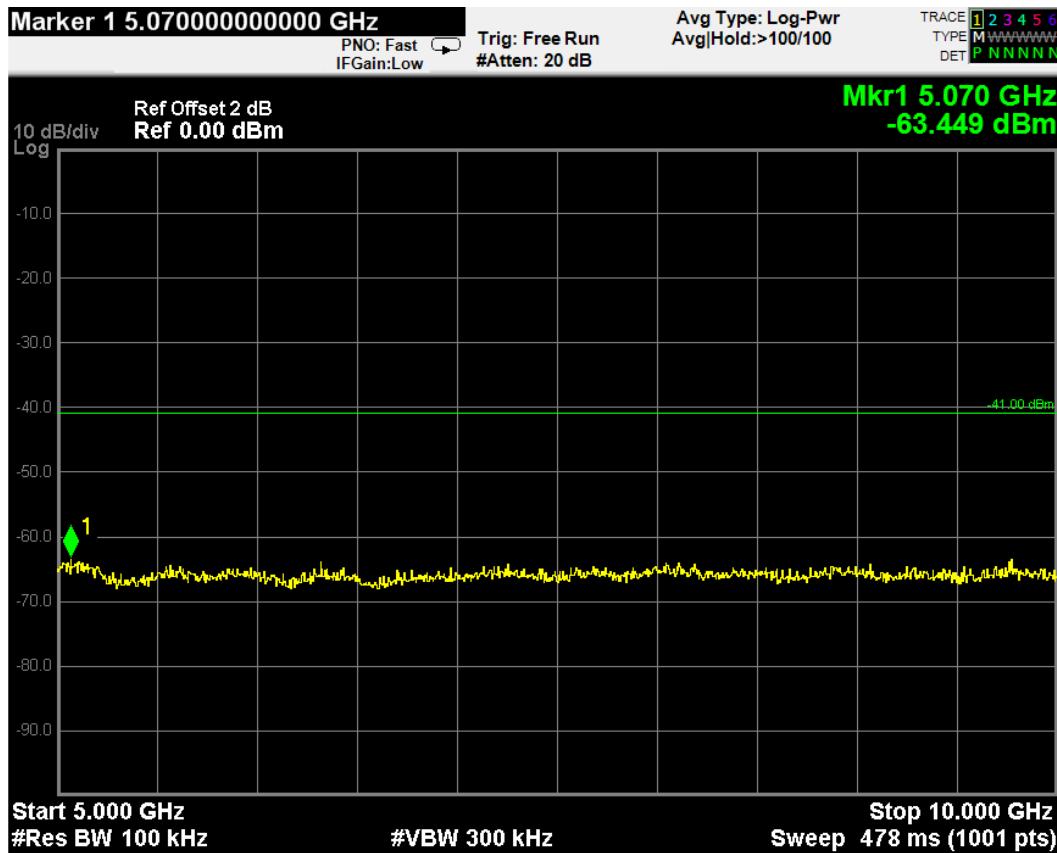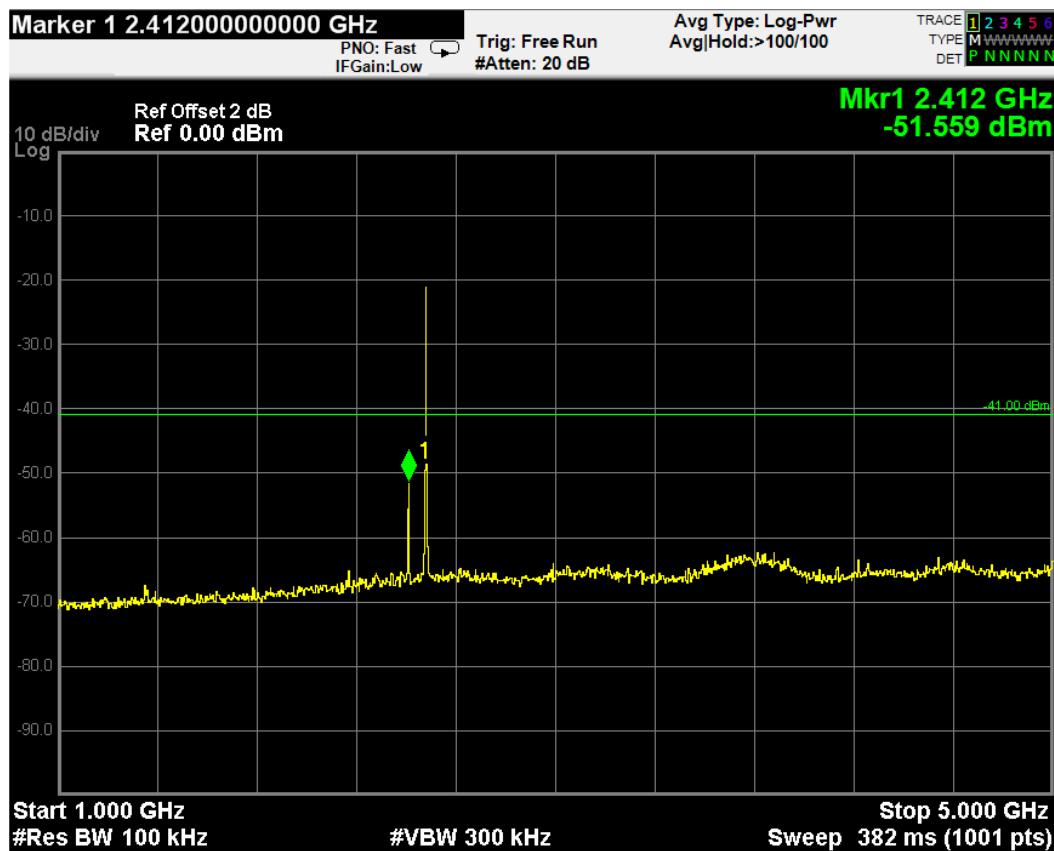

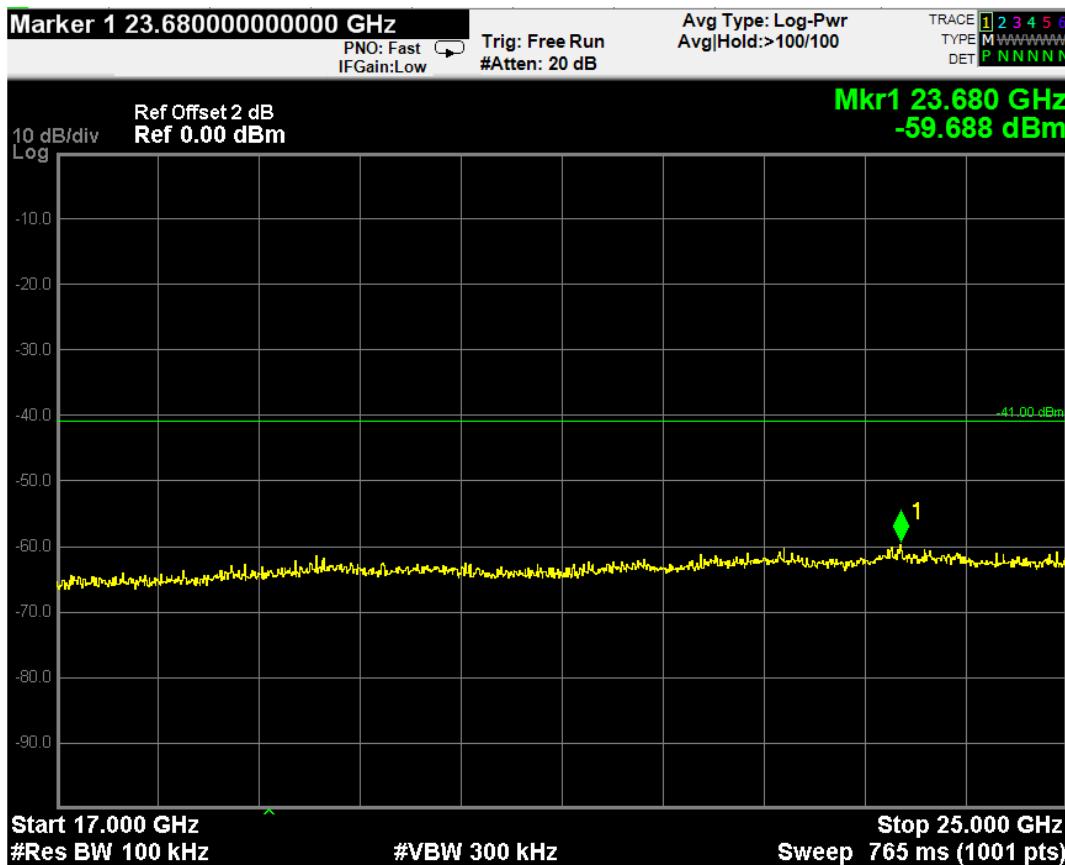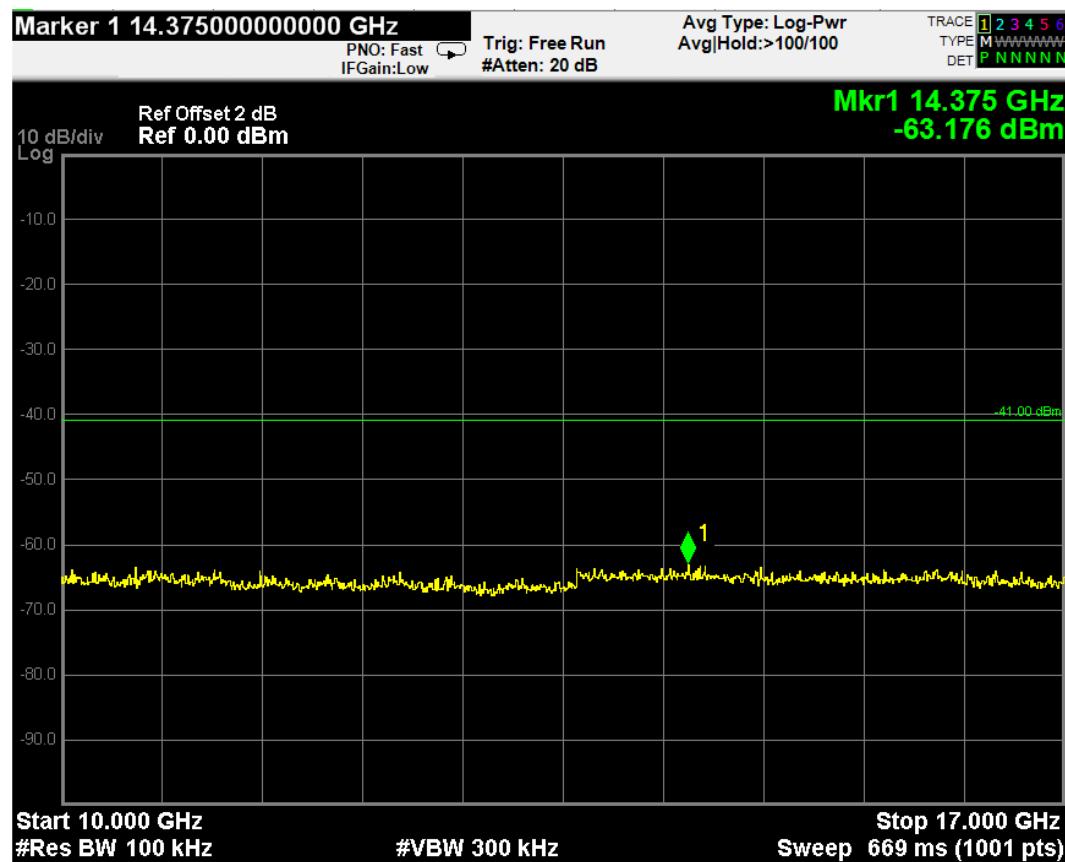

7 BAND EDGES MEASUREMENT

7.1 Test Equipment

The following test equipment was used during the band edges measurement:

Item	Type	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
1.	Spectrum Analyzer	Agilent	N9010A	MY52221182	Jun 12, 2016	Jun 11, 2017

7.2 Block Diagram of Test Setup

The same as section 4.2.

7.3 Specification Limits (§15.247(d))

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.

7.4 Operating Condition of EUT

The switch ON/OFF was used to enable the EUT to change the channel one by one.

7.5 Test Procedure

The transmitter output was connected to the Test Receiver. Set RBW of Test Receiver to 100kHz and VBW to 300kHz with suitable frequency span including 100kHz bandwidth from band edge.


The test procedure is defined in ANSI C63.10-2013 (11.11.3 Emission level measurement was used).

7.6 Test Results

PASSED. All the test results are attached in next pages.

(Test Date: Aug. 11, 2016 Temperature: 23°C Humidity: 50 %)

Location	Channel	Frequency	Delta Marker	Result
Below Band Edge	11	2405 MHz	39.891 dB	More than 20 dB below the highest level of the desired power
Upper Band Edge	26	2480 MHz	34.337 dB	

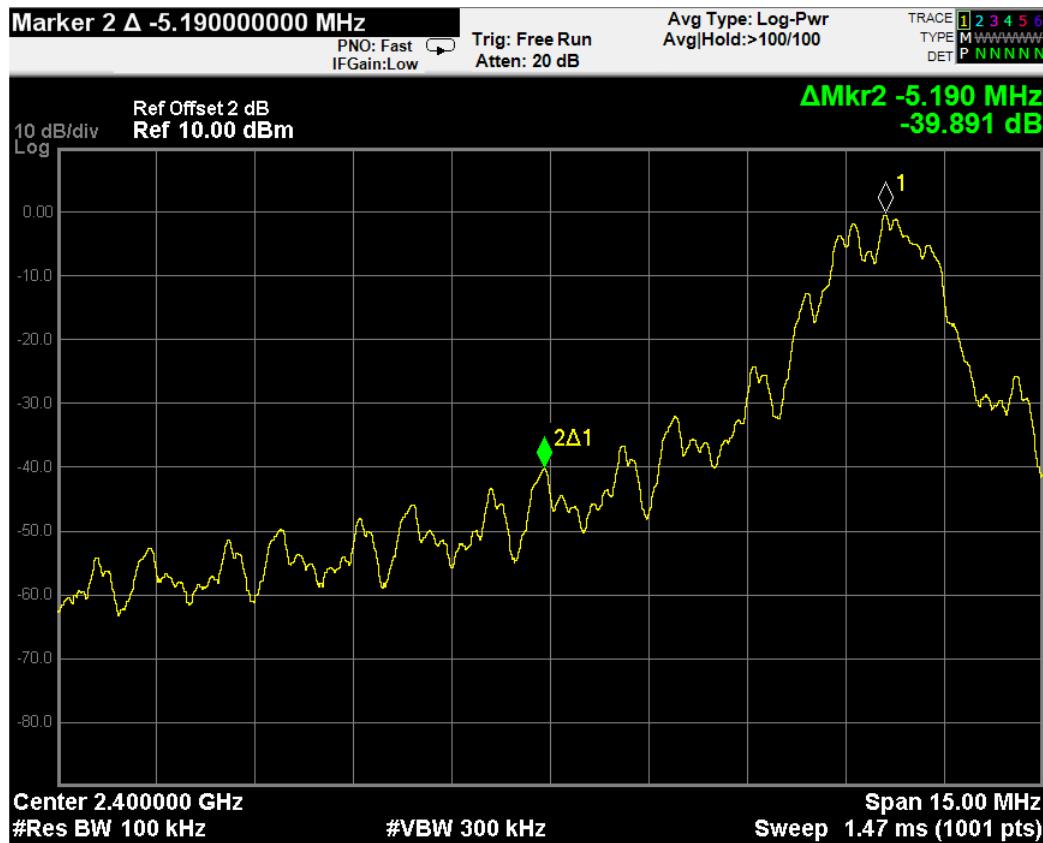Ch11 2405MHz (Below Edge 2400 MHz)**Ch26 2480MHz (Upper Edge 2483.5 MHz)**

8 POWER SPECTRAL DENSITY MEASUREMENT

8.1 Test Equipment

The following test equipment was used during the power spectral density measurement:

Item	Type	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
1.	Spectrum Analyzer	Agilent	N9010A	MY52221182	Jun 12, 2016	Jun 11, 2017

8.2 Block Diagram of Test Setup

The same as section 4.2.

8.3 Specification Limits (§15.247(e))

The peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band.

8.4 Operating Condition of EUT

The switch ON/OFF was used to enable the EUT to change the channel one by one.

8.5 Test Procedure

The transmitter output was connected to the Test Receiver. The Test Receiver was set as $3\text{kHz} \leq \text{RBW} \leq 100\text{kHz}$, $\text{VBW} \geq 3 \times \text{RBW}$, span = 1.5 times the DTS channel bandwidth.


The test procedure is defined in ANSI C63.10-2013 (11.10.2 Measurement Procedure “Method PKPSD (peak PSD)” was used).

8.6 Test Results

PASSED. All the test results are attached in next pages.

(Test Date: Mar. 10, 2016 Temperature: 20°C Humidity: 44 %)

Channel	Frequency	Power Spectral Density	Limit
11	2405 MHz	-0.688 dBm	8dBm
20	2450 MHz	-0.463 dBm	8dBm
25	2475 MHz	-20.975 dBm	8dBm

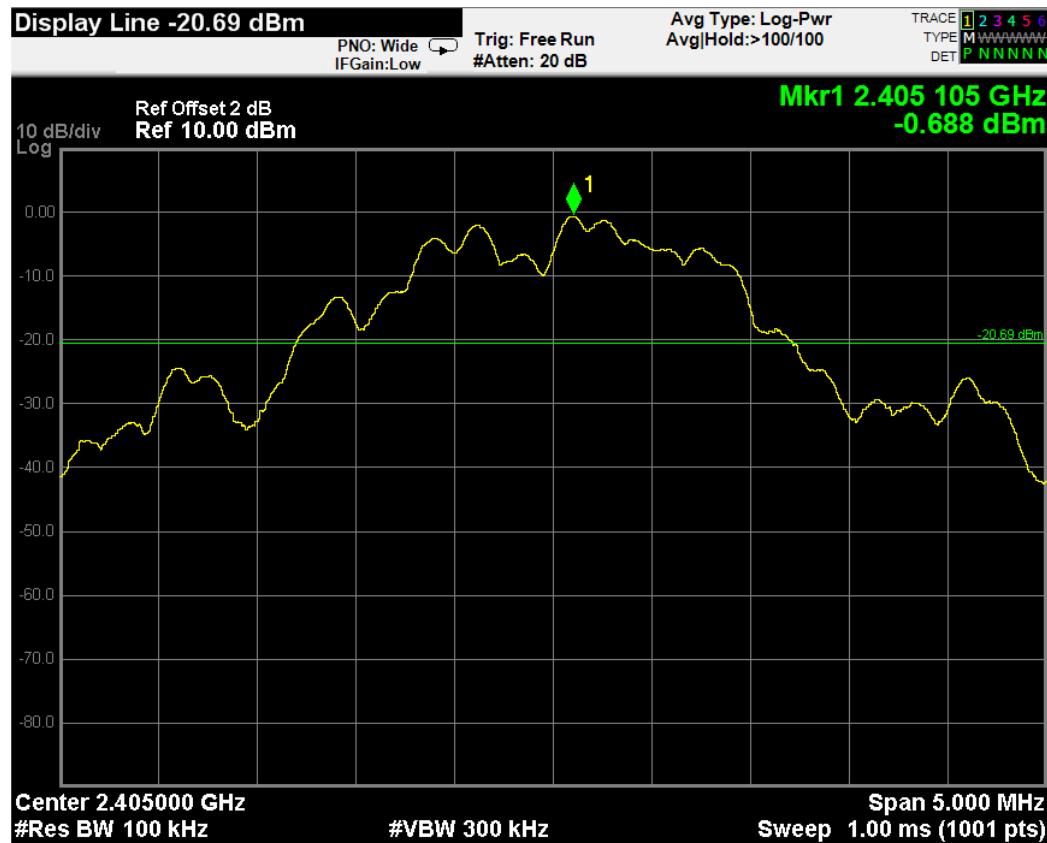Ch11 2405 MHz**Ch20 2450 MHz**

Ch26 2480 MHz

9 DEVIATION TO TEST SPECIFICATIONS

None.