
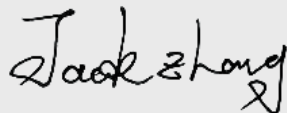




Test report No:
2260060R-RF-US-P06V01

FCC & ISED TEST REPORT

Product Name	LED lamp
Trademark	PHILIPS
Model and /or type reference	9290031508
FCC ID	2AGBW9290031508X
IC	20812-31508X
Applicant's name / address	Signify (China) investment Co., Ltd Building No.9, Lane 888, Tianlin Road, Minhang district, 200233, Shanghai, China
Test method requested, standard	FCC CFR Title 47 Part 15 Subpart C Section 15.247 ANSI C63.10: 2013 KD558074 D01 15.247 Meas Guidance v05r02 RSS-Gen Issue 5 / RSS-247 Issue 2
Verdict Summary	IN COMPLIANCE
Documented by (name / position & signature)	Tim Cao/Project Engineer 
Approved by (name / position & signature)	Jack Zhang/Manager 
Date of issue	2022-09-02
Report Version	V1.0
Report template No	Template_FCC Part 15C-RF-V1.0

INDEX

	page
General conditions	4
Environmental conditions	5
Possible test case verdicts	5
Abbreviations	5
Document History	6
Remarks and Comments.....	6
Used Equipment	7
Uncertainty	9
1 General Information.....	10
1.1 General Description of the Item(s)	10
1.2 Antenna Information	11
1.3 Channel List	12
1.4 Power Setting.....	12
2 Description of Test Setup	13
2.1 Operating mode(s) used for tests.....	13
2.2 Auxiliary equipment / Test software for the EUT	13
2.3 Test Configuration / Block diagram used for tests	14
2.4 Testing process	15
3 Verdict summary section	16
3.1 Standards.....	16
3.2 Deviation(s) from the Standard(s) / Test Specification(s).....	16
3.3 Overview of results.....	17
3.4 Test Facility.....	18
4 Test Results	19
4.1 AC Power Line Conducted Emission	19
4.1.1 Limit	19
4.1.2 Test Setup.....	19
4.1.3 Test Procedure.....	19
4.1.4 Test Data	20
4.2 Emissions in restricted frequency bands	22
4.2.1 Limit	22
4.2.2 Test Setup.....	24
4.2.3 Test Procedure.....	25
4.2.4 Test Data	26

4.3	Emissions in non-restricted frequency band.....	52
4.3.1	Limit	52
4.3.2	Test Setup.....	52
4.3.3	Test Procedure.....	52
4.3.4	Test Data	53
4.4	Duty cycle	57
4.4.1	Limit	57
4.4.2	Test Setup.....	57
4.4.3	Test Procedure.....	57
4.4.4	Test Data	58
4.5	Radiated Emission Band Edge	59
4.5.1	Limit	59
4.5.2	Test Setup.....	59
4.5.3	Test Procedure.....	59
4.5.4	Test Data	60
4.6	DTS Bandwidth	92
4.6.1	Limit	92
4.6.2	Test Setup.....	92
4.6.3	Test Procedure.....	92
4.6.4	Test Data	93
4.7	Fundamental emission output power	95
4.7.1	Limit	95
4.7.2	Test Setup.....	95
4.7.3	Test Procedure.....	96
4.7.4	Test Data	97
4.8	Power Density	98
4.8.1	Limit:	98
4.8.2	Test Setup.....	98
4.8.3	Test Procedure.....	98
4.8.4	Test Data	99
4.9	Antenna Requirement.....	100
4.9.1	Limit:	100
4.9.2	Antenna Connector Construction:	100
5	Test setup photo and EUT Photo.....	101

COMPETENCES AND GUARANTEES

DEKRA is a testing laboratory competent to carry out the tests described in this report.

In order to assure the traceability to other national and international laboratories, DEKRA has a calibration and maintenance program for its measurement equipment.

DEKRA guarantees the reliability of the data presented in this report, which is the result of the measurements and the tests performed to the item under test on the date and under the conditions stated in the report and it is based on the knowledge and technical facilities available at DEKRA at the time of performance of the test.

DEKRA is liable to the client for the maintenance of the confidentiality of all information related to the item under test and the results of the test.

The results presented in this Test Report apply only to the particular item under test established in this document.

IMPORTANT: No parts of this report may be reproduced or quoted out of context, in any form or by any means, except in full, without the previous written permission of DEKRA.

GENERAL CONDITIONS

Test Location	Emissions in restricted frequency bands above 1GHz: EPINTEK SUZHOU LTD., SUZHOU INDUSTRIAL PARK BRANCH. Building B, No.5 Minsheng Road, Suzhou Industrial Park, Suzhou, Jiangsu, China Other: DEKRA Testing and Certification (Suzhou) Co., Ltd. No. 99, Hongye Road, Suzhou Industrial Park Suzhou, 215006, P.R. China
Date(receive sample)	Jul. 04, 2022
Date (start test)	Jul. 07, 2022
Date (finish test)	Jul. 21, 2022

1. This report is only referred to the item that has undergone the test.
2. This report does not constitute or imply on its own an approval of the product by the Certification Bodies or Competent Authorities.
3. This document is only valid if complete; no partial reproduction can be made without previous written permission of DEKRA.
4. This test report cannot be used partially or in full for publicity and/or promotional purposes without previous written permission of DEKRA.

ENVIRONMENTAL CONDITIONS

The climatic conditions during the tests are within the limits specified by the manufacturer for the operation of the EUT and the test equipment. The climatic conditions during the tests were within the following limits:

Ambient temperature	15 °C – 35 °C
Relative Humidity air	30% - 60%

If explicitly required in the basic standard or applied product / product family standard the climatic values are recorded and documented separately in this test report.

POSSIBLE TEST CASE VERDICTS

Test case does not apply to test object	N/A
Test object does meet requirement	P (Pass) / PASS
Test object does not meet requirement	F (Fail) / FAIL
Not measured	N/M

ABBREVIATIONS

For the purposes of the present document, the following abbreviations apply:

EUT	: Equipment Under Test
QP	: Quasi-Peak
CAV	: CISPR Average
AV	: Average
CDN	: Coupling Decoupling Network
SAC	: Semi-Anechoic Chamber
OATS	: Open Area Test Site
BW	: Bandwidth
AM	: Amplitude Modulation
PM	: Pulse Modulation
HCP	: Horizontal Coupling Plane
VCP	: Vertical Coupling Plane
U_N	: Nominal voltage
T_x	: Transmitter
R_x	: Receiver
N/A	: Not Applicable
N/M	: Not Measured

DOCUMENT HISTORY

Report No.	Version	Description	Issued Date
2260060R-RF-US-P06V01	V1.0	Initial issue of report.	2022-09-02

REMARKS AND COMMENTS

1. The equipment under test (EUT) does meet the essential requirements of the stated standard(s)/test(s).
2. These test results on a sample of the device are for the purpose of demonstrating Compliance with Part 15 Subpart C Paragraph 15.247, RSS-Gen Issue 5, RSS-247 Issue 2.
3. The measurement result is considered in conformance with the requirement if it is within the prescribed limit, It is not necessary to account the uncertainty associated with the measurement result.
4. The test results presented in this report relate only to the object tested.
5. The test report shall not be reproduced without the written approval of DEKRA Testing and Certification (Suzhou) Co., Ltd.
6. This report will not be used for social proof function in China market.
7. DEKRA declines any responsibility with the following test data provided by customer that may affect the validity of result:
 - Chapter 1.1 General Description of the Item(s);
 - Chapter 1.2 Antenna Informaion;
 - Chapter 1.3 Channel List;
 - Chapter 1.4 Power Setting.

USED EQUIPMENT

AC Power Line Conducted Emission / TR1

Instrument	Manufacturer	Model No.	Serial No.	Cal. Date	Next Cal. Date
EMI Test Receiver	R&S	ESCI	100906	2022.04.09	2023.04.08
Two-Line V-Network	R&S	ENV216	101044	2022.03.12	2023.03.11
50ohm Termination	SHX	TF2	7081402	2021.09.04	2022.09.03
50ohm Termination	SHX	TF2	7081403	2021.09.04	2022.09.03
50ohm Coaxial Switch	Anritsu	MP59B	6200464462	N/A	N/A
Temperature/Humidity Meter	RTS	RTS-8S	TR1-TH	2022.07.07	2023.07.06
Dekra test software	Dekra	-	-	-	-

Emissions in non-restricted frequency bands/ Occupied Bandwidth/ Fundamental emission output power Power Spectral Density / TR8

Instrument	Manufacturer	Model No.	Serial No.	Cal. Date	Next Cal. Date
MAX Signal Analyzer	Keysight	N9020B	MY59050482	2021.11.18	2022.11.17
Coaxial Cable	Woken	A50-SMAMSMAM-1m	20111443	2022.03.30	2023.03.29
Temperature/Humidity Meter	RTS	RTS-8S	RF08	2022.07.07	2023.07.06
Dekra test software	Dekra	-	-	-	-

Radiated Emission(30MHz-1GHz) / AC3

Instrument	Manufacturer	Model No.	Serial No.	Cal. Date	Next Cal. Date
EMI Test Receiver	R&S	ESCI	100176	2021.08.15	2022.08.14
TRILOG Broadband Antenna	SCHWARZBECK	VULB 9168	1231	2022.05.21	2023.05.20
Coaxial Cable	Huber+Suhner	RG 214	AC3-C	2022.03.30	2023.03.29
Temperature/Humidity Meter	RTS	RTS-8S	AC3-TH	2021.11.23	2022.11.22
Dekra test software	Dekra	-	-	-	-

Radiated Emission / AC5(1GHz-40GHz)(Chamber details)

Instrument	Manufacturer	Model No.	Serial No.	Cal. Date	Next Cal. Date
MXA Signal Analyzer	Keysight	N9020B	MY60112218	2022.01.09	2023.01.08
Amplifier	Keleto	LNPA	SK20190225	2021.09.26	2022.09.25
Pre-Amplifier	EMCI	EMC184045SE	980263	2022.05.21	2023.05.20
DRG Horn Antenna	ETS-Lindgren	3117	167055	2021.08.23	2022.08.22
Broad-Band Horn Antenna	Schwarzbeck	BBHA9170	294	2022.05.19	2023.05.18
Loop Antenna	R&S	HFH2-Z2	833799/003	2022.04.15	2023.04.14
Coaxial Cable	Huber+Suhner	SUCOFLEX 106	AC5-C2	2022.03.30	2023.03.29
Coaxial Cable	ROSENBERGER	LA1-C011- 2000/3000	AC5-40G	2022.03.21	2023.03.20
Temperature/Humidity Meter	RTS	RTS-8S	AC5-TH	2022.07.07	2023.07.06
Dekra test software	Dekra	-	-	-	-

UNCERTAINTY

Uncertainties have been calculated according to the DEKRA internal document. The reported expanded uncertainties are based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95% .

Test item	Uncertainty
AC Power Line Conducted Emission	9kHz~150kHz: 2.80dB 150kHz~30MHz: 2.40dB
Peak Power Output	± 1.27 dB
Radiated Emission(30MHz~1GHz)	Horizontal: 30MHz~200MHz: 3.50 dB 300MHz~1GHz: 3.60 dB Vertical: 30MHz~200MHz: 3.60 dB 300MHz~1GHz: 3.50 dB
Radiated Emission(1GHz~26.5GHz)	Horizontal: 1GHz~18GHz: 5.00 dB Vertical: 1GHz~18GHz: 4.80 dB
RF antenna conducted test	± 1.27 dB
Radiated Emission Band Edge	± 3.9 dB
DTS Bandwidth	± 150 Hz
Occupied Bandwidth	± 1 kHz
Power Density	± 1.27 dB

1 GENERAL INFORMATION

1.1 General Description of the Item(s)

Product Name..... :	LED lamp
Model No. :	9290031508
Trademark :	PHILIPS
FCC ID :	2AGBW9290031508X
IC..... :	20812-31508X
Manufacturer..... :	Signify (China) investment Co., Ltd
Manufacturer Address..... :	Building No.9, Lane 888, Tianlin Road, Minhang district, 200233, Shanghai, China

Wireless specification..... :	BLE 5.0					
Operating frequency range(s)	2402~2480MHz					
Type of Modulation..... :	GFSK					
PHYs	<input checked="" type="checkbox"/>	LE 1M	<input checked="" type="checkbox"/>	LE 2M	<input checked="" type="checkbox"/>	LE Coded S=2/8
Data Rate	<input checked="" type="checkbox"/>	1Mbit/s	<input checked="" type="checkbox"/>	2Mbit/s	<input checked="" type="checkbox"/>	500/125 Kbit/s
Number of channel..... :	40					

Rated power supply	Voltage and Frequency				
	<input type="checkbox"/>	AC: 220 – 240 V, 50/60 Hz			
	<input checked="" type="checkbox"/>	AC: 110 – 130 V, 50/60 Hz			
	<input type="checkbox"/>	DC:			
	<input type="checkbox"/>	Battery:			
	<input type="checkbox"/>	PoE:			

1.2 Antenna Information

Antenna model / type number.....:	N/A		
Antenna serial number	N/A		
Antenna Delivery	<input checked="" type="checkbox"/>	1TX + 1RX	
	<input type="checkbox"/>	2TX + 2RX	
	<input type="checkbox"/>	Others:.....	
Antenna technology.....:	<input checked="" type="checkbox"/>	SISO	
	<input type="checkbox"/>	MIMO	<input type="checkbox"/> CDD
			<input type="checkbox"/> Beam-forming
Antenna Type.....:	<input type="checkbox"/>	External	<input type="checkbox"/> Dipole
			<input type="checkbox"/> Sectorized
			<input type="checkbox"/> Ceramic Chip
	<input checked="" type="checkbox"/>	Internal	<input type="checkbox"/> PIFA
			<input type="checkbox"/> PCB
			<input checked="" type="checkbox"/> Metal Antenna
			<input type="checkbox"/> Others.....
Antenna Gain.....:	2.46 dBi		

1.3 Channel List

Bluetooth Working Frequency of Each Channel: (For LE)							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
00	2402 MHz	01	2404 MHz	02	2406 MHz	03	2408 MHz
04	2410 MHz	05	2412 MHz	06	2414 MHz	07	2416 MHz
08	2418 MHz	09	2420 MHz	10	2422 MHz	11	2424 MHz
12	2426 MHz	13	2428 MHz	14	2430 MHz	15	2432 MHz
16	2434 MHz	17	2436 MHz	18	2438 MHz	19	2440 MHz
20	2442 MHz	21	2444 MHz	22	2446 MHz	23	2448 MHz
24	2450 MHz	25	2452 MHz	26	2454 MHz	27	2456 MHz
28	2458 MHz	29	2460 MHz	30	2462 MHz	31	2464 MHz
32	2466 MHz	33	2468 MHz	34	2470 MHz	35	2472 MHz
36	2474 MHz	37	2476 MHz	38	2478 MHz	39	2480 MHz

1.4 Power Setting

Mode	Channel	Frequency (MHz)	Power Setting
LE_1Mbps	00	2402	10
	19	2440	10
	39	2480	10
LE_2Mbps	00	2402	10
	19	2440	10
	39	2480	10
LE_Coded S=2	00	2402	10
	19	2440	10
	39	2480	10
LE_Coded S=8	00	2402	10
	19	2440	10
	39	2480	10

Note: The General Description of the Item , antenna information, Channel List and Power Setting for the EUT in clause 1 are provided and confirmed by the client.

2 DESCRIPTION OF TEST SETUP

2.1 Operating mode(s) used for tests

During the tests the following operating mode(s) has(have) been used.


Test Mode For Bluetooth	Mode 1: Transmit by LE_1Mbps
	Mode 2: Transmit by LE_2Mbps
	Mode 3: Transmit by LE_Coded S=2
	Mode 4: Transmit by LE_Coded S=8

2.2 Auxiliary equipment / Test software for the EUT


Auxiliary equipment	Type / Version	Manufacturer	Supplied by
Notebook	Think pad x220	Lenovo	Adapter
software	Type / Version	Manufacturer	Supplied by
Approbation Tool	V1.1.5.0	N/A	N/A

2.3 Test Configuration / Block diagram used for tests

Test setup Diagram- AC Line Conducted Emission Test

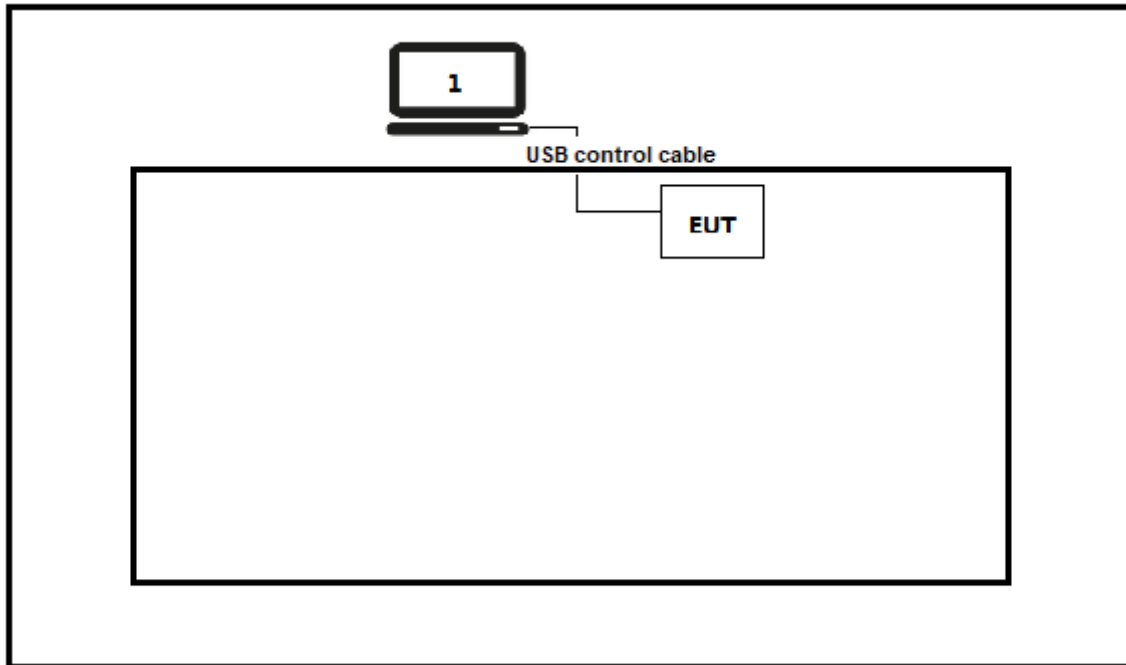

Test setup Diagram- Conducted test

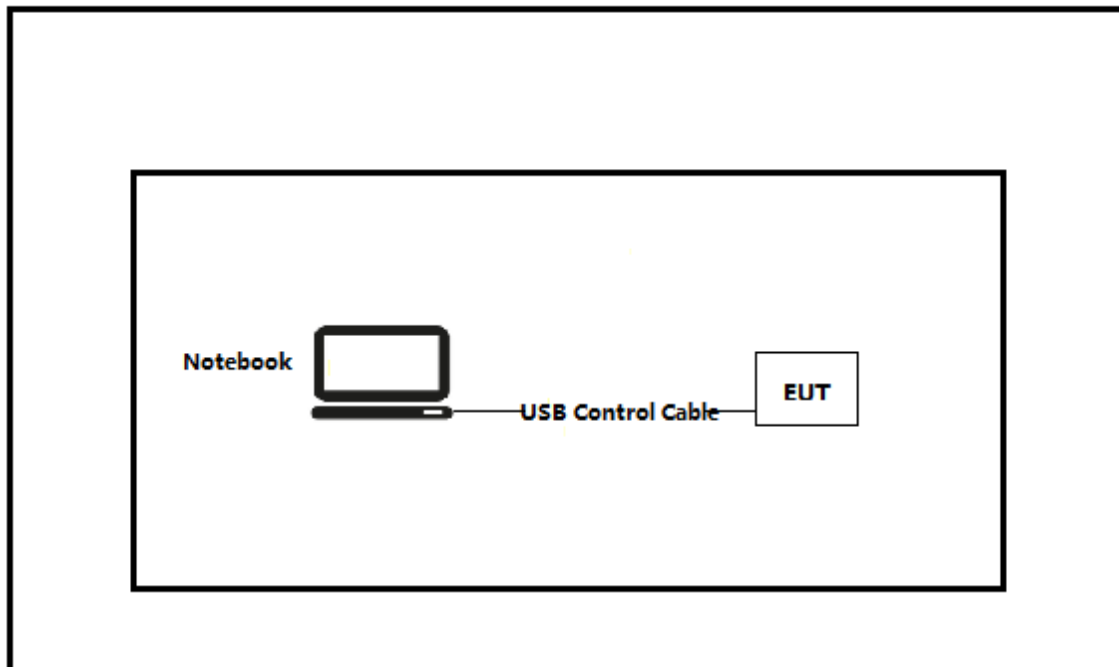

2.4 Testing process

1	Setup the EUT as shown in Section 2.3.
2	Execute the [Approbation Tool] on the notebook.
3	Configure the test mode, the test channel, and the data rate.
4	Verify that the EUT works properly.

3 VERDICT SUMMARY SECTION

This chapter presents an overview of standards and results. Refer to the next chapters for details of measured test results and applied test levels.

3.1 Standards

Standard	Year	Description
FCC CFR Title 47 Part 15 Subpart C Section 15.247	2020	Operation within the bands 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz.
ANSI C63.10	2013	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices
KDB 558074 D01 v05r02	2019	Guidance for performing compliance measurements on Digital Transmission System (DTS) operating under section 15.247
RSS-Gen Issue 5 Amendment 1	2019	General Requirements for Compliance of Radio Apparatus
RSS-247 Issue 2	2017	Digital Transmission Systems (DTSs), Frequency Hopping Systems (FHSs) and Licence-Exempt Local Area Network (LE-LAN) Devices

3.2 Deviation(s) from the Standard(s) / Test Specification(s)

The following deviation(s) was / were made from the published requirements of the listed standards: N/A.

(Please define the deviations from the standard(s) if applicable)

3.3 Overview of results

For FCC

Requirement – Test case	Basic standard(s)	Verdict	Remark
AC Power Line Conducted Emission	FCC 15.207	PASS	---
Emissions in restricted frequency bands	FCC 15.247(b)(3)	PASS	---
Duty cycle	ANSI C63.10:2013	PASS	---
Emissions in non-restricted frequency bands	FCC 15.247(d), FCC 15.209	PASS	---
Radiated Emission Band Edge	FCC 15.247(d)	PASS	---
Fundamental emission output power	FCC 15.247(d), FCC 15.209	PASS	---
DTS Bandwidth	FCC 15.247(a)(2)	PASS	---
Power Spectral Density	FCC 15.247(e)	PASS	---
Antenna Requirement	FCC 15.203	PASS	---

For ISED

Requirement – Test case	Basic standard(s)	Verdict	Remark
AC Power Line Conducted Emission	RSS-Gen Issue 5 Section 8.8	PASS	---
Emissions in restricted frequency bands	RSS-Gen Issue 5 Section 8.9	PASS	---
Duty cycle	ANSI C63.10:2013	PASS	---
Emissions in non-restricted frequency bands	RSS-247 Issue 2 Section 5.5	PASS	---
Radiated Emission Band Edge	RSS-Gen Issue 5 Section 8.10	PASS	---
Fundamental emission output power	RSS-247 Issue 2 Section 5.4(d)	PASS	---
DTS Bandwidth	RSS-Gen Issue 5 Section 6.7	PASS	---
Power Spectral Density	RSS-247 Issue 2 Section 5.2(b)	PASS	---
Antenna Requirement	RSS-Gen Issue 5 Section 6.8	PASS	---

3.4 Test Facility

USA	:	FCC Designation Number: CN1199
CA	:	ISED CAB identifier: CN0040

4 TEST RESULTS

4.1 AC Power Line Conducted Emission

VERDICT: PASS

4.1.1 Limit

Standard		
FCC Part 15 Subpart C Paragraph 15.207		
Frequency range [MHz]	Limit: QP [dB(μV) ¹⁾	Limit: AV [dB(μV) ¹⁾
0,15 - 0,50	66 - 56 ²⁾	56 - 46 ²⁾
0,50 - 5,0	56	46
5,0 - 30	60	50


¹⁾ At the transition frequency, the lower limit applies.

²⁾ The limit decreases linearly with the logarithm of the frequency.

NOTE 1: The exclusion band for transmitters shall be considered for transmitters operating at frequencies below 30 MHz.

NOTE 2: Where the AC output port is directly connected (or via a circuit breaker) to the AC power input port of the EUT the AC power output port need not to be tested.

4.1.2 Test Setup

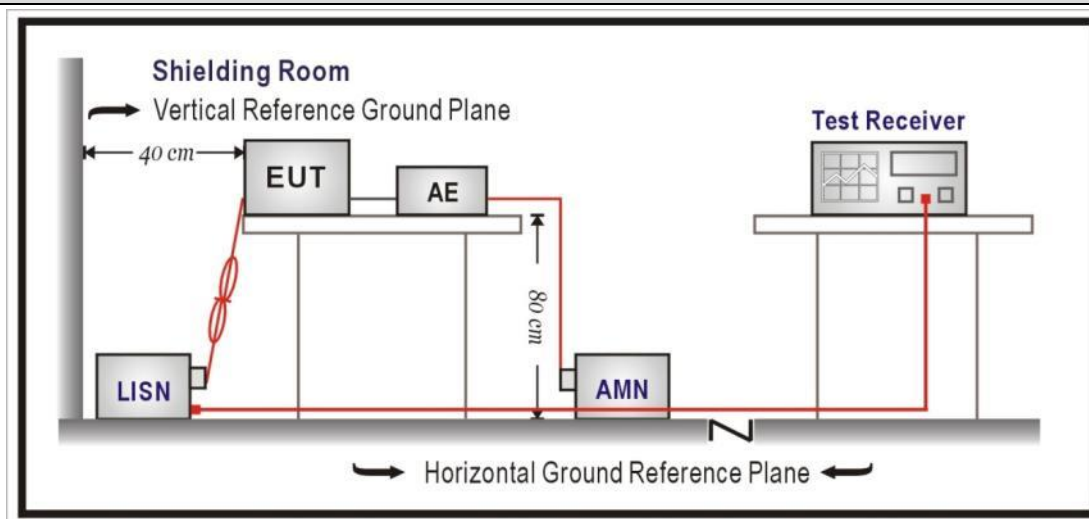


4.1.3 Test Procedure

References Rule	Chapter	Item
<input checked="" type="checkbox"/> ANSI C63.10-2013	6.2	Standard test method for ac power-line conducted emissions from unlicensed wireless devices


4.1.4 Test Data

Profile: 2260060R	Page No.: 71
Engineer: Yu Liu	
Site: TR1	Time: 2022/07/06 - 04:21
Limit: FCC_Part15.207_CE_AC Power	Margin: 0
Probe: ENV216_101190(0.009-30MHz)	Polarity: Neutral
EUT:LED Lamp	Power: AC 120V/60Hz
Note: Mode: N-line	

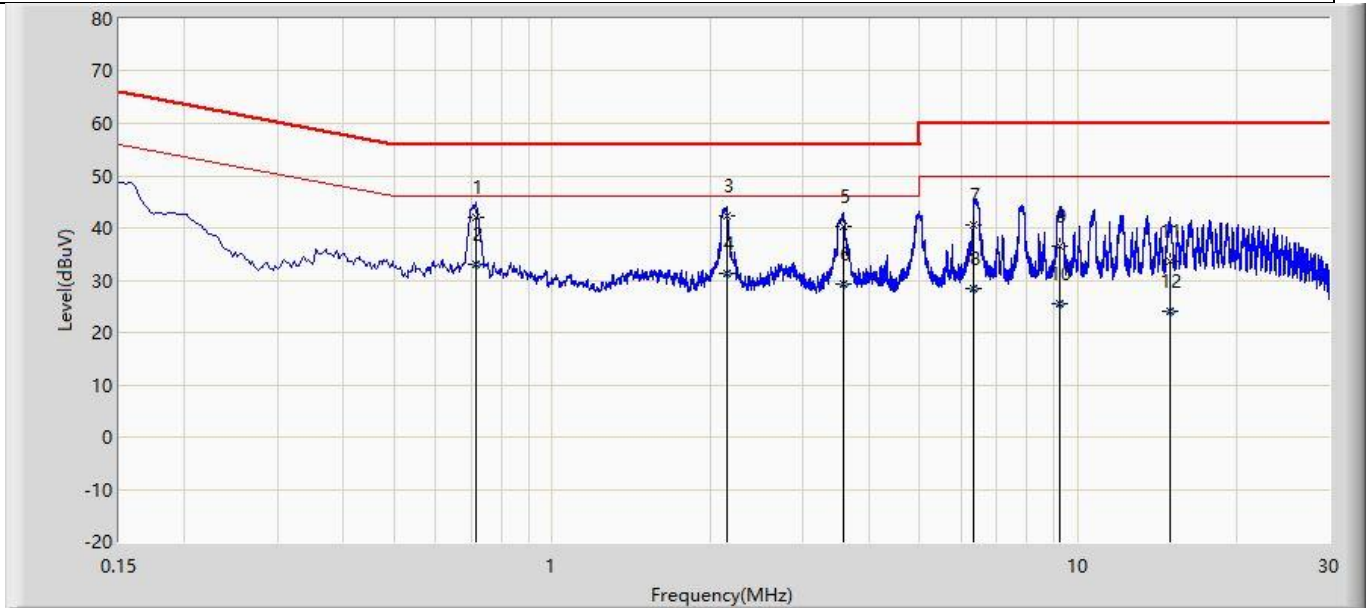

No	Mark	Frequency (MHz)	Measure Level (dBuV)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV)	Factor (dB)	Type
1		0.717	42.128	32.508	-13.872	56.000	9.620	QP
2	*	0.717	33.164	23.544	-12.836	46.000	9.620	AV
3		2.148	42.280	32.596	-13.720	56.000	9.685	QP
4		2.148	31.334	21.649	-14.666	46.000	9.685	AV
5		3.579	40.433	30.685	-15.567	56.000	9.749	QP
6		3.579	29.376	19.627	-16.624	46.000	9.749	AV
7		6.346	40.462	30.590	-19.538	60.000	9.872	QP
8		6.346	28.492	18.620	-21.508	50.000	9.872	AV
9		9.240	36.614	26.625	-23.386	60.000	9.989	QP
10		9.240	25.484	15.495	-24.516	50.000	9.989	AV
11		14.926	33.614	23.470	-26.386	60.000	10.144	QP
12		14.926	23.985	13.840	-26.015	50.000	10.144	AV

Profile: 2260060R	Page No.: 72
Engineer: Yu Liu	
Site: TR1	Time: 2022/07/06 - 04:22
Limit: FCC_Part15.207_CE_AC Power	Margin: 0
Probe: ENV216_101190(0.009-30MHz)	Polarity: Line
EUT: LED Lamp	Power: AC 120V/60Hz
Note: Mode: L-line	

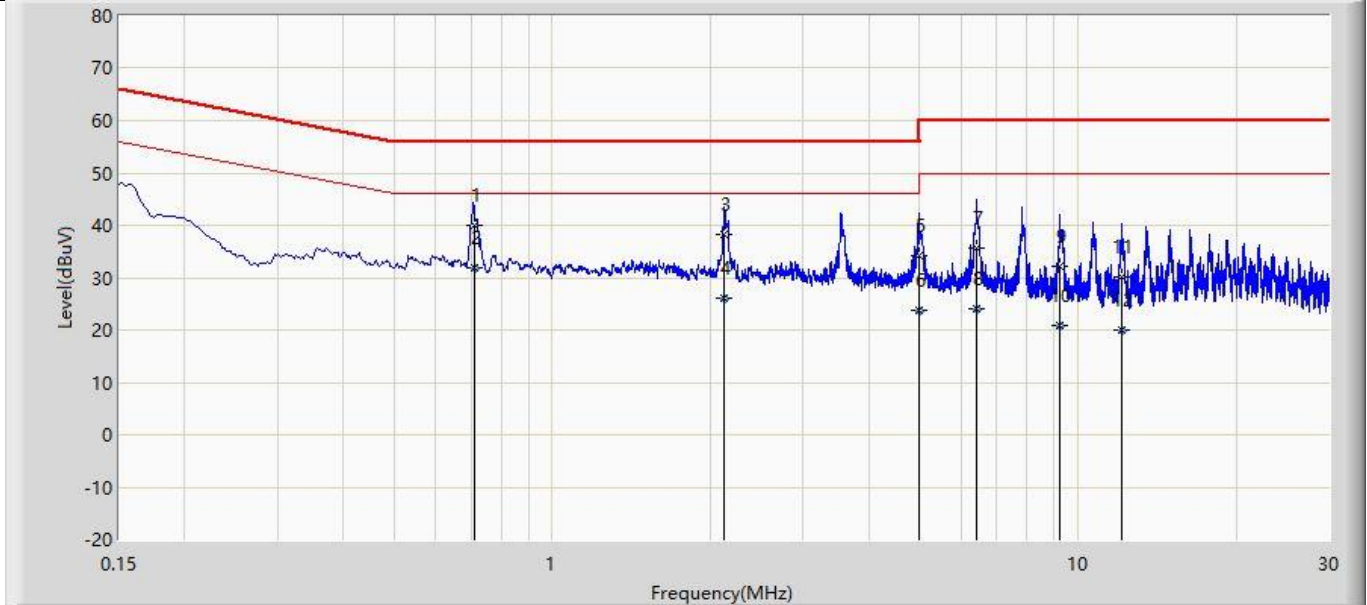

No	Mark	Frequency (MHz)	Measure Level (dBuV)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV)	Factor (dB)	Type
1		0.710	39.936	30.303	-16.064	56.000	9.633	QP
2	*	0.710	31.760	22.127	-14.240	46.000	9.633	AV
3		2.126	38.342	28.662	-17.658	56.000	9.680	QP
4		2.126	26.118	16.439	-19.882	46.000	9.680	AV
5		4.983	34.240	24.423	-21.760	56.000	9.818	QP
6		4.983	23.790	13.973	-22.210	46.000	9.818	AV
7		6.407	35.741	25.858	-24.259	60.000	9.883	QP
8		6.407	24.198	14.315	-25.802	50.000	9.883	AV
9		9.240	32.205	22.214	-27.795	60.000	9.991	QP
10		9.240	20.824	10.833	-29.176	50.000	9.991	AV
11		12.084	30.235	20.175	-29.765	60.000	10.060	QP
12		12.084	20.003	9.942	-29.997	50.000	10.060	AV

Note:

1. " * ", means this data is the worst emission level.
2. Measurement Level = Reading Level + Factor(Probe+Cable-Amp). Test Photograph.

4.2 Emissions in restricted frequency bands**VERDICT: PASS****4.2.1 Limit****Standard**

FCC Part 15 Subpart C Paragraph 15.207

Restricted Bands of operation

Frequency (MHz)	Frequency (MHz)	Frequency (MHz)	Frequency (GHz)
0.090 – 0.110	16.42 – 16.423	399.9 – 410	4.5 – 5.15
0.495 – 0.505	16.69475 – 16.69525	608 – 614	5.35 – 5.46
2.1735 – 2.1905	16.80425 – 16.80475	960 – 1240	7.25 – 7.75
4.125 – 4.128	25.5 – 25.67	1300 – 1427	8.025 – 8.5
4.17725 – 4.17775	37.5 – 38.25	1435 – 1626.5	9.0 – 9.2
4.20725 – 4.20775	73 – 74.6	1645.5 – 1646.5	9.3 – 9.5
6.215 – 6.218	74.8 – 75.2	1660 – 1710	10.6 – 12.7
6.26775 – 6.26825	108 – 121.94	1718.8 – 1722.2	13.25 – 13.4
6.31175 – 6.31225	123 – 138	2200 – 2300	14.47 – 14.5
8.291 – 8.294	149.9 – 150.05	2310 – 2390	15.35 – 16.2
8.362 – 8.366	156.52475 – 156.52525	2483.5 – 2500	17.7 – 21.4
8.37625 – 8.38675	156.7 – 156.9	2690 – 2900	22.01 – 23.12
8.81425 – 8.81475	162.0125 – 167.17	3260 – 3267	23.6 – 24.0
12.29 – 12.293	167.72 – 173.2	3332 – 3339	31.2 – 31.8
12.51975 – 12.52025	240 – 285	3345.8 – 3358	36.43 – 36.5
12.57675 – 12.57725	322 – 335.4	3600 – 4400	
13.36 – 13.41			

Restricted Bands of operation for IC

0.090 - 0.110	13.36 - 13.41	960 - 1427	9.0 - 9.2
0.495 - 0.505	16.42 - 16.423	1435 - 1626.5	9.3 - 9.5
2.1735 - 2.1905	16.69475 - 16.69525	1645.5 - 1646.5	10.6 - 12.7
3.020 - 3.026	16.80425 - 16.80475	1660 - 1710	13.25 - 13.4
4.125 - 4.128	25.5 - 25.67	1718.8 - 1722.2	14.47 - 14.5
4.17725 - 4.17775	37.5 - 38.25	2200 - 2300	15.35 - 16.2
4.20725 - 4.20775	73 - 74.6	2310 - 2390	17.7 - 21.4
5.677 - 5.683	74.8 - 75.2	2483.5 - 2500	22.01 - 23.12
6.215 - 6.218	108 - 138	2655 - 2900	23.6 - 24.0
6.26775 - 6.26825	149.9 - 150.05	3260 - 3267	31.2 - 31.8
6.31175 - 6.31225	156.52475 - 156.52525	3332 - 3339	36.43 - 36.5
8.291 - 8.294	156.7 - 156.9	3345.8 - 3358	Above 38.6
8.362 - 8.366	162.0125 - 167.17	3500 - 4400	
8.37625 - 8.38675	167.72 - 173.2	4500 - 5150	
8.81425 - 8.81475	240 - 285	5350 - 5460	
12.29 - 12.293	322 - 335.4	7250 - 7750	
12.51975 - 12.52025	399.9 - 410	8025 - 8500	
12.57675 - 12.57725	608 - 614	--	


Restricted Band Emissions Limit			
Frequency (MHz)	Field strength ($\mu\text{V}/\text{m}$)	Field strength ($\text{dB}\mu\text{V}/\text{m}$)	Measurement distance (m)
0.009 - 0.49	2400/F(kHz)	48.5 – 13.8	30 _(Note 1)
0.49 - 1.705	24000/F(kHz)	33.8 - 23	30 _(Note 1)
1.705 - 30	30	29.5	30 _(Note 1)
30 - 88	100	40	3 _(Note 2)
88 - 216	150	43.5	3 _(Note 2)
216 - 960	200	46	3 _(Note 2)
Above 960	500	54	3 _(Note 2)

Note 1: At frequencies below 30 MHz, measurements may be performed at a distance closer than that specified in the regulations; however, an attempt should be made to avoid making measurements in the near field. Pending the development of an appropriate measurement procedure for measurements performed below 30 MHz, when performing measurements at a closer distance than specified, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade).


Note 2: At frequencies at or above 30 MHz, measurements may be performed at a distance other than what is specified provided: measurements are not made in the near field except where it can be shown that near field measurements are appropriate due to the characteristics of the device; and it can be demonstrated that the signal levels needed to be measured at the distance employed can be detected by the measurement equipment. Measurements shall not be performed at a distance greater than 30 meters unless it can be further demonstrated that measurements at a distance of 30 meters or less are impractical. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse linear-distance for field strength measurements; inverse-linear-distance-squared for power density measurements).

4.2.2 Test Setup


Below 30MHz Test Setup:

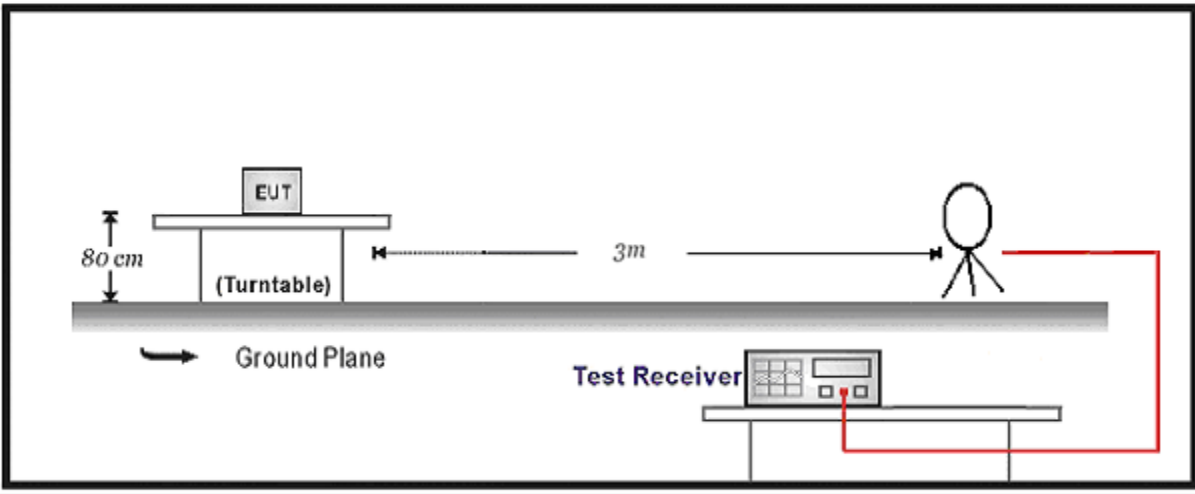

30MHz-1GHz Test Setup:

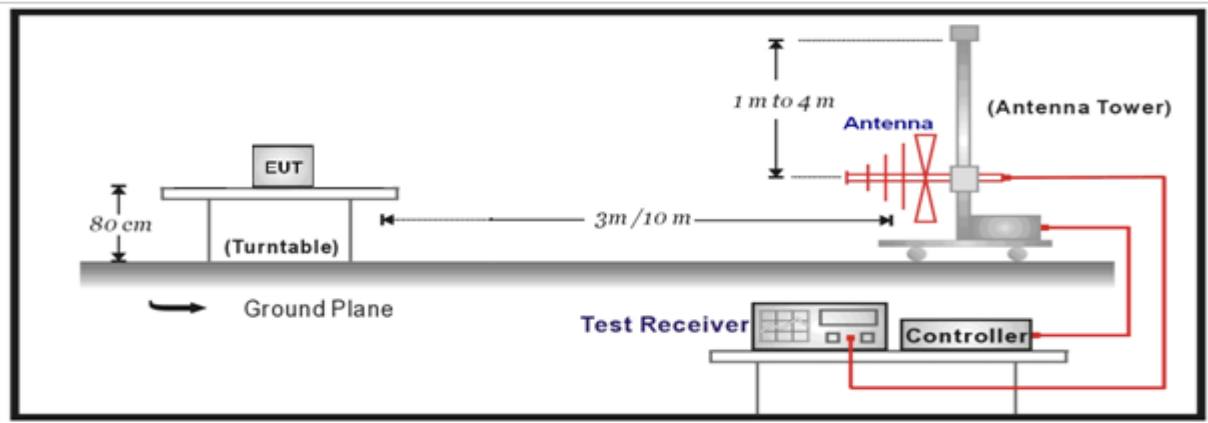


Above 1GHz Test Setup:

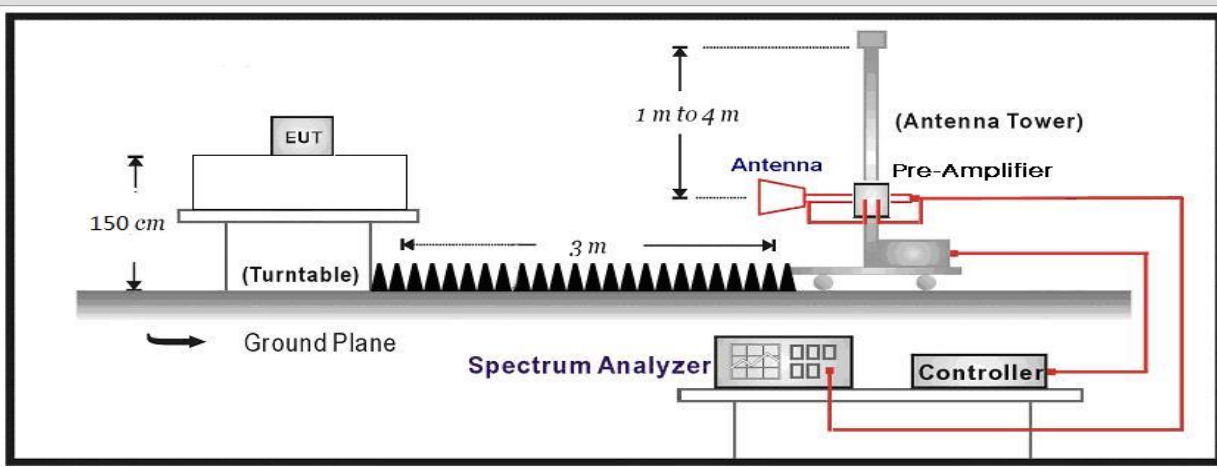

4.2.3 Test Procedure			
	References Rule	Chapter	Description
<input checked="" type="checkbox"/>	ANSI C63.10	11.12	Emissions in restricted frequency bands
	<input checked="" type="checkbox"/> ANSI C63.10	11.12.1	Radiated emission measurements
	<input checked="" type="checkbox"/> ANSI C63.10	11.12.2.7	Radiated spurious emission test
	<input checked="" type="checkbox"/> ANSI C63.10	6.4	Radiated emissions from unlicensed wireless devices below 30 MHz
	<input checked="" type="checkbox"/> ANSI C63.10	6.5	Radiated emissions from unlicensed wireless devices in the frequency range of 30 MHz to 1000 MHz
	<input checked="" type="checkbox"/> ANSI C63.10	6.6	Radiated emissions from unlicensed wireless devices above 1 GHz


4.2.4 Test Data

Profile: 2260060R	Page No.: 1
Engineer: Zed	
Site: EPINTEK	Time: 2022/07/12
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Vertical
EUT: LED Lamp	Power: AC 120V/60Hz
Note: Mode 1:Transmit at 2402MHz by LE_1Mbps	

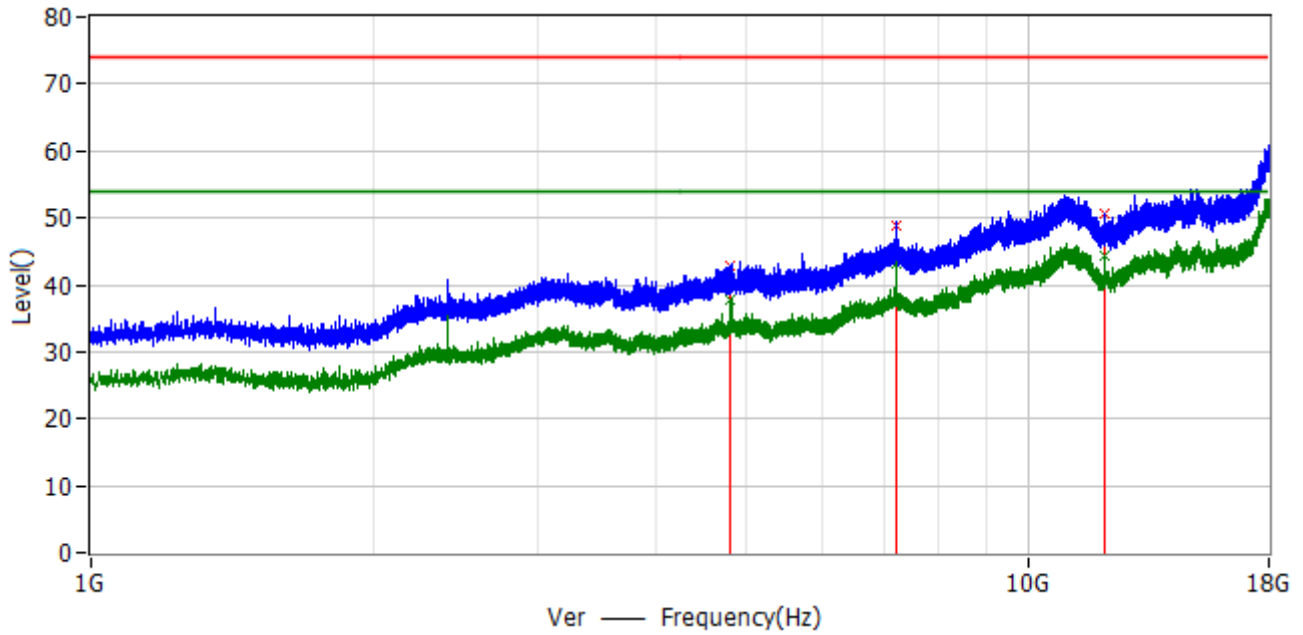


No.	Frequency	Limit (dBuV/m)	Level (dBuV/m)	Delta dB	Factor dB	Detector	Polar
1*	4.805 GHz	74.0	42.7	-31.3	-8.4	PK	Ver
2*	7.206 GHz	74.0	48.7	-25.3	-3.1	PK	Ver
3*	12.011 GHz	74.0	50.7	-23.3	1.7	PK	Ver
4*	4.805 GHz	54.0	37.8	-16.2	-8.4	AV	Ver
5*	7.207 GHz	54.0	43.1	-10.9	-3.1	AV	Ver
6*	12.011 GHz	54.0	44.4	-9.6	1.7	AV	Ver

Profile: 2260060R	Page No.: 2
Engineer: Zed	
Site: EPINTEK	Time: 2022/07/12
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Horizontal
EUT: LED Lamp	Power: AC 120V/60Hz
Note: Mode 1:Transmit at 2402MHz by LE_1Mbps	

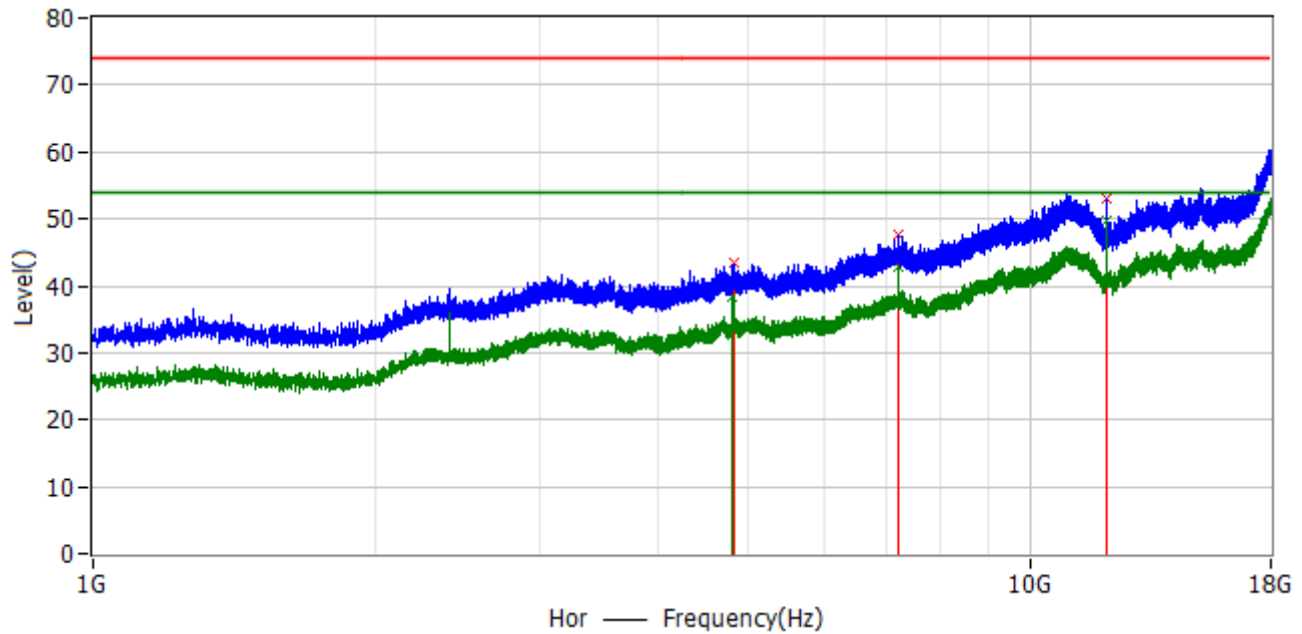


No.	Frequency	Limit (dBuV/m)	Level (dBuV/m)	Delta dB	Factor dB	Detector	Polar
1*	4.811 GHz	74.0	43.3	-30.7	-8.4	PK	Hor
2*	7.206 GHz	74.0	47.6	-26.4	-3.1	PK	Hor
3*	12.011 GHz	74.0	53.1	-20.9	1.7	PK	Hor
4*	4.805 GHz	54.0	38.5	-15.5	-8.4	AV	Hor
5*	7.207 GHz	54.0	42.7	-11.3	-3.1	AV	Hor
6*	12.011 GHz	54.0	49.8	-4.2	1.7	AV	Hor

Profile: 2260060R	Page No.: 3
Engineer: Zed	
Site: EPINTEK	Time: 2022/07/12
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Vertical
EUT: LED Lamp	Power: AC 120V/60Hz
Note: Mode 1:Transmit at 2440MHz by LE_1Mbps	

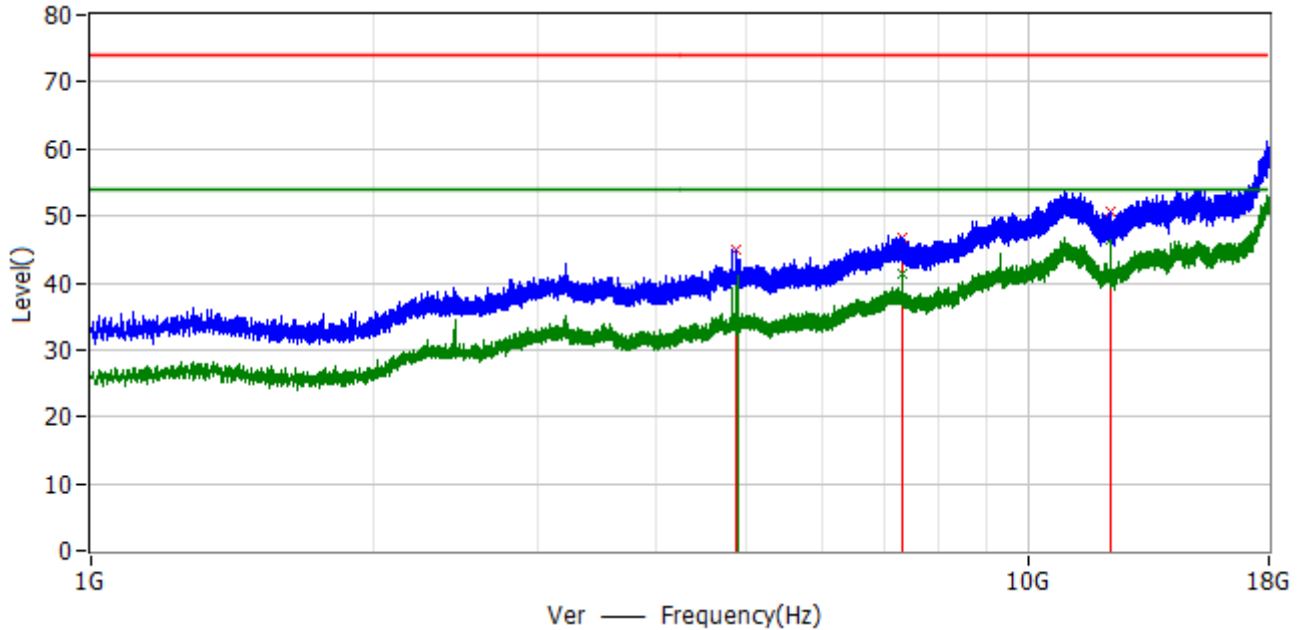


No.	Frequency	Limit (dBuV/m)	Level (dBuV/m)	Delta dB	Factor dB	Detector	Polar
1*	4.880 GHz	74.0	44.8	-29.2	-8.2	PK	Ver
2*	7.319 GHz	74.0	46.7	-27.3	-3.1	PK	Ver
3*	12.201 GHz	74.0	50.7	-23.3	2.2	PK	Ver
4*	4.881 GHz	54.0	41.0	-13.0	-8.2	AV	Ver
5*	7.321 GHz	54.0	41.4	-12.6	-3.1	AV	Ver
6*	12.202 GHz	54.0	46.3	-7.7	2.2	AV	Ver

Profile: 2260060R	Page No.: 4
Engineer: Zed	
Site: EPINTEK	Time: 2022/07/12 - 21:56
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Horizontal
EUT: LED Lamp	Power: AC 120V/60Hz
Note: Mode 1:Transmit at 2440MHz by LE_1Mbps	

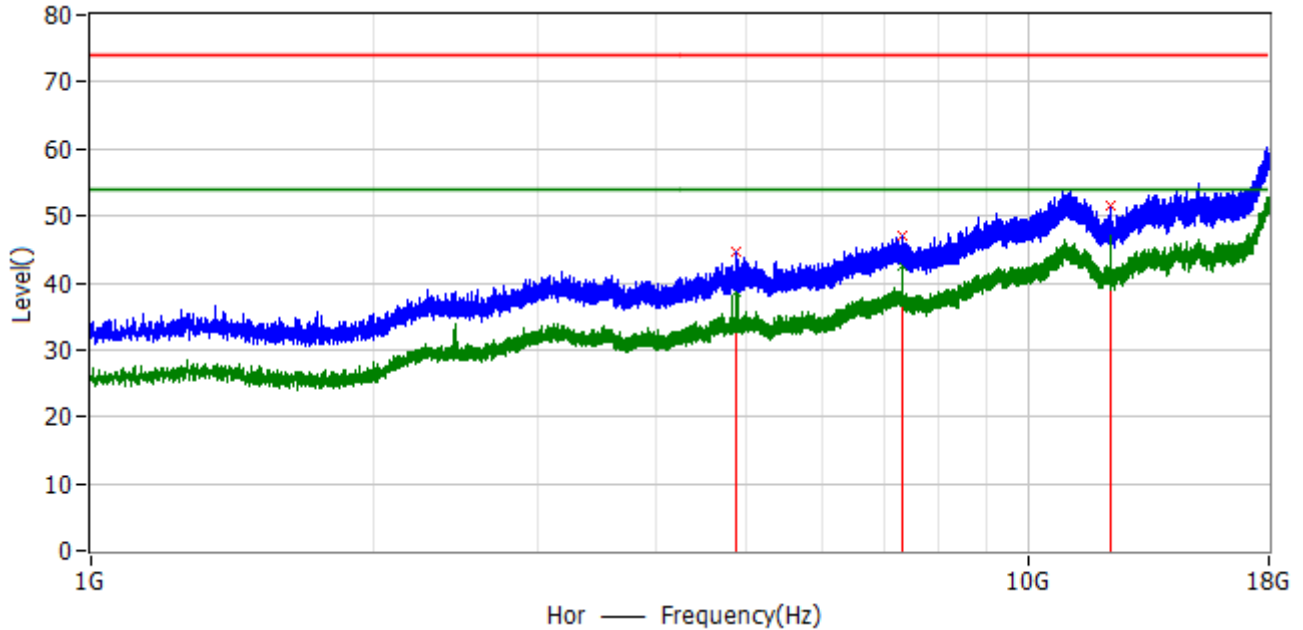


No.	Frequency	Limit (dBuV/m)	Level (dBuV/m)	Delta dB	Factor dB	Detector	Polar
1*	4.880 GHz	74.0	44.7	-29.3	-8.2	PK	Hor
2*	7.319 GHz	74.0	47.0	-27.0	-3.1	PK	Hor
3*	12.201 GHz	74.0	51.4	-22.6	2.2	PK	Hor
4*	4.880 GHz	54.0	38.6	-15.4	-8.2	AV	Hor
5*	7.320 GHz	54.0	42.5	-11.5	-3.1	AV	Hor
6*	12.202 GHz	54.0	47.2	-6.8	2.2	AV	Hor

Profile: 2260060R	Page No.: 5
Engineer: Zed	
Site: EPINTEK	Time: 2022/07/12
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Vertical
EUT: LED Lamp	Power: AC 120V/60Hz
Note: Mode 1:Transmit at 2480MHz by LE_1Mbps	

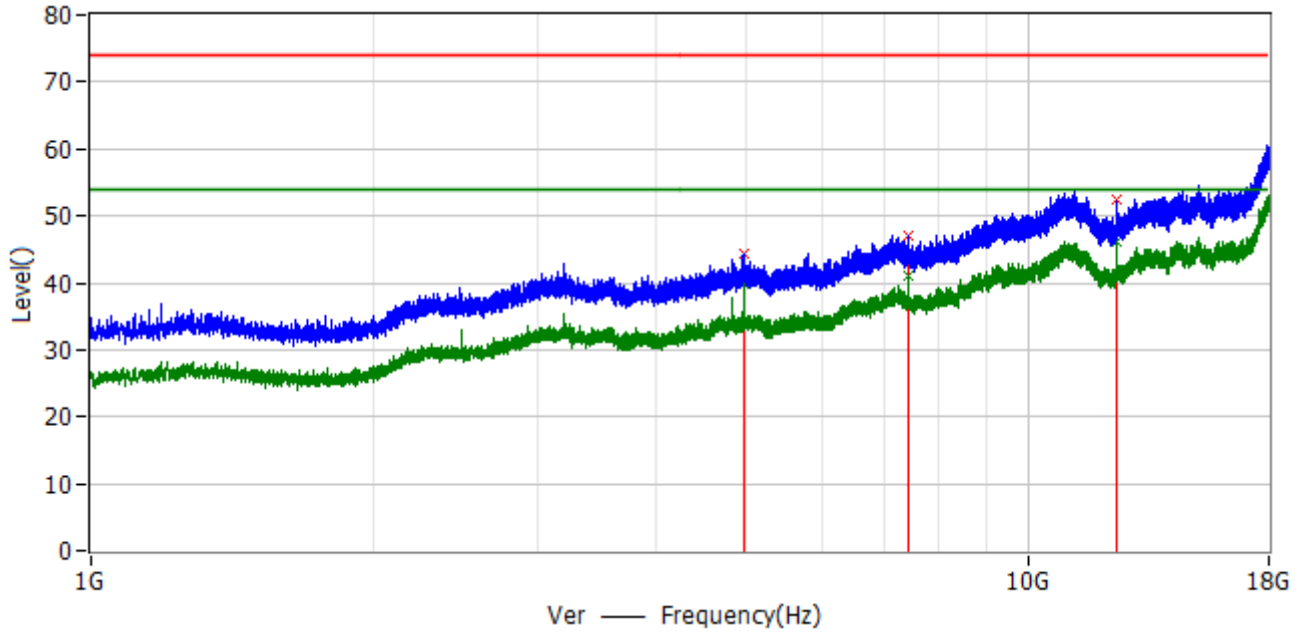


No.	Frequency	Limit (dBuV/m)	Level (dBuV/m)	Delta dB	Factor dB	Detector	Polar
1*	4.959 GHz	74.0	44.3	-29.7	-7.9	PK	Ver
2*	7.440 GHz	74.0	47.1	-26.9	-3.1	PK	Ver
3*	12.401 GHz	74.0	52.3	-21.7	2.2	PK	Ver
4*	4.960 GHz	54.0	39.8	-14.2	-7.9	AV	Ver
5*	7.440 GHz	54.0	41.1	-12.9	-3.1	AV	Ver
6*	12.401 GHz	54.0	46.1	-7.9	2.2	AV	Ver

Profile: 2260060R	Page No.: 6
Engineer: Zed	
Site: EPINTEK	Time: 2022/07/12
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Horizontal
EUT: LED Lamp	Power: AC 120V/60Hz
Note: Mode 1:Transmit at 2480MHz by LE_1Mbps	

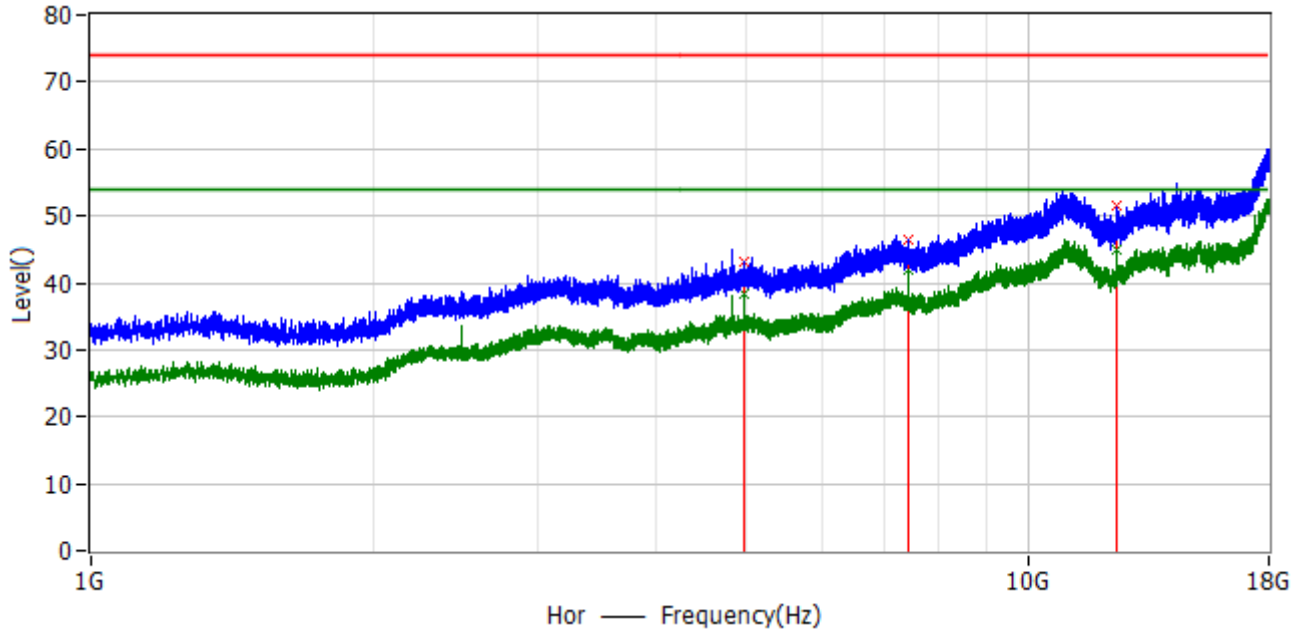


No.	Frequency	Limit (dBuV/m)	Level (dBuV/m)	Delta dB	Factor dB	Detector	Polar
1*	4.960 GHz	74.0	43.0	-31.0	-7.9	PK	Hor
2*	7.441 GHz	74.0	46.5	-27.5	-3.1	PK	Hor
3*	12.399 GHz	74.0	51.4	-22.6	2.2	PK	Hor
4*	4.960 GHz	54.0	38.3	-15.7	-7.9	AV	Hor
5*	7.441 GHz	54.0	41.9	-12.1	-3.1	AV	Hor
6*	12.400 GHz	54.0	44.8	-9.2	2.2	AV	Hor

Profile: 2260060R	Page No.: 7
Engineer: Zed	
Site: EPINTEK	Time: 2022/07/12
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Vertical
EUT: LED Lamp	Power: AC 120V/60Hz
Note: Mode 2:Transmit at 2402MHz by LE_2Mbps	

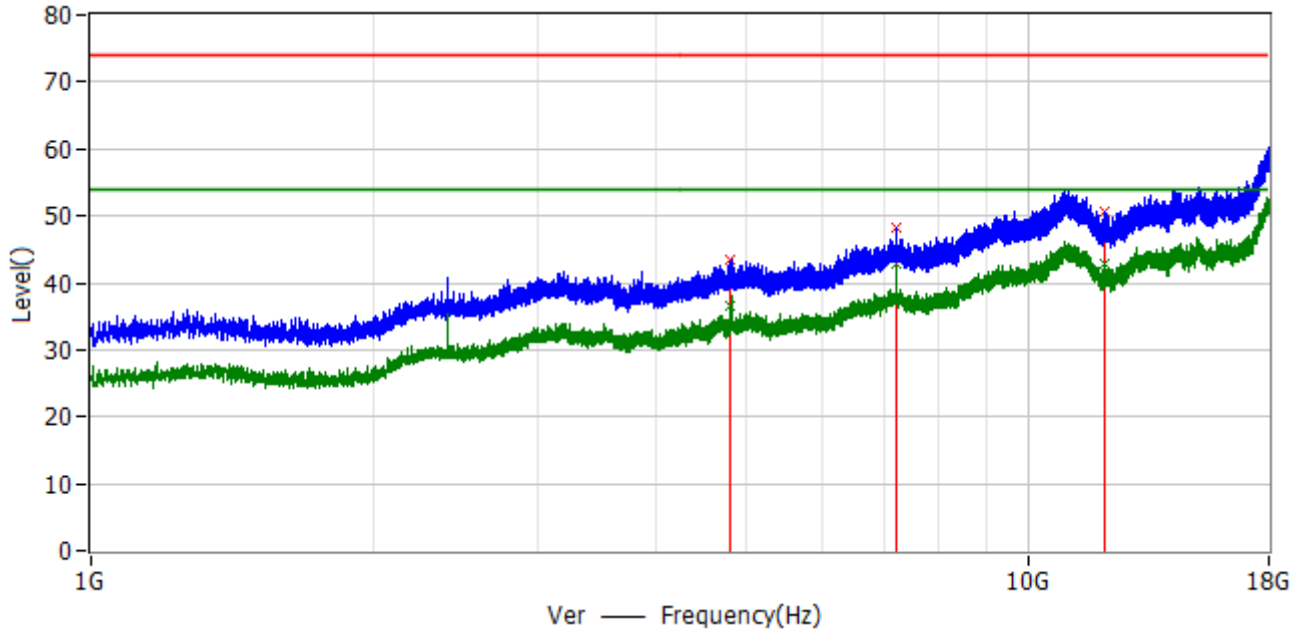


No.	Frequency	Limit (dBuV/m)	Level (dBuV/m)	Delta dB	Factor dB	Detector	Polar
1*	4.803 GHz	74.0	43.3	-30.7	-8.4	PK	Ver
2*	7.204 GHz	74.0	48.3	-25.7	-3.1	PK	Ver
3*	12.013 GHz	74.0	50.6	-23.4	1.7	PK	Ver
4*	4.805 GHz	54.0	36.5	-17.5	-8.4	AV	Ver
5*	7.205 GHz	54.0	42.7	-11.3	-3.1	AV	Ver
6*	12.013 GHz	54.0	42.9	-11.1	1.7	AV	Ver

Profile: 2260060R	Page No.: 8
Engineer: Zed	
Site: EPINTEK	Time: 2022/07/12
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Horizontal
EUT: LED Lamp	Power: AC 120V/60Hz
Note: Mode 2:Transmit at 2402MHz by LE_2Mbps	

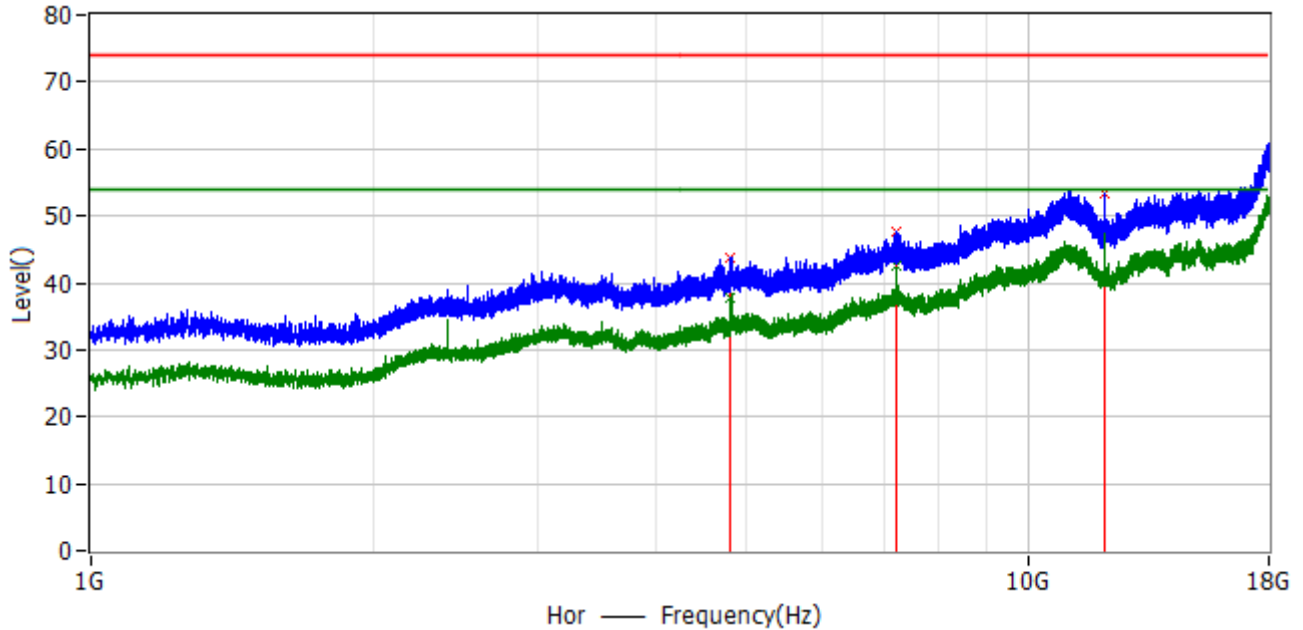


No.	Frequency	Limit (dBuV/m)	Level (dBuV/m)	Delta dB	Factor dB	Detector	Polar
1*	4.803 GHz	74.0	43.7	-30.3	-8.4	PK	Hor
2*	7.207 GHz	74.0	47.5	-26.5	-3.1	PK	Hor
3*	12.012 GHz	74.0	53.2	-20.8	1.7	PK	Hor
4*	4.804 GHz	54.0	37.9	-16.1	-8.4	AV	Hor
5*	7.205 GHz	54.0	42.4	-11.6	-3.1	AV	Hor
6*	12.008 GHz	54.0	47.3	-6.7	1.7	AV	Hor

Profile: 2260060R	Page No.: 9
Engineer: Zed	
Site: EPINTEK	Time: 2022/07/12
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Vertical
EUT: LED Lamp	Power: AC 120V/60Hz
Note: Mode 2:Transmit at 2440MHz by LE_2Mbps	

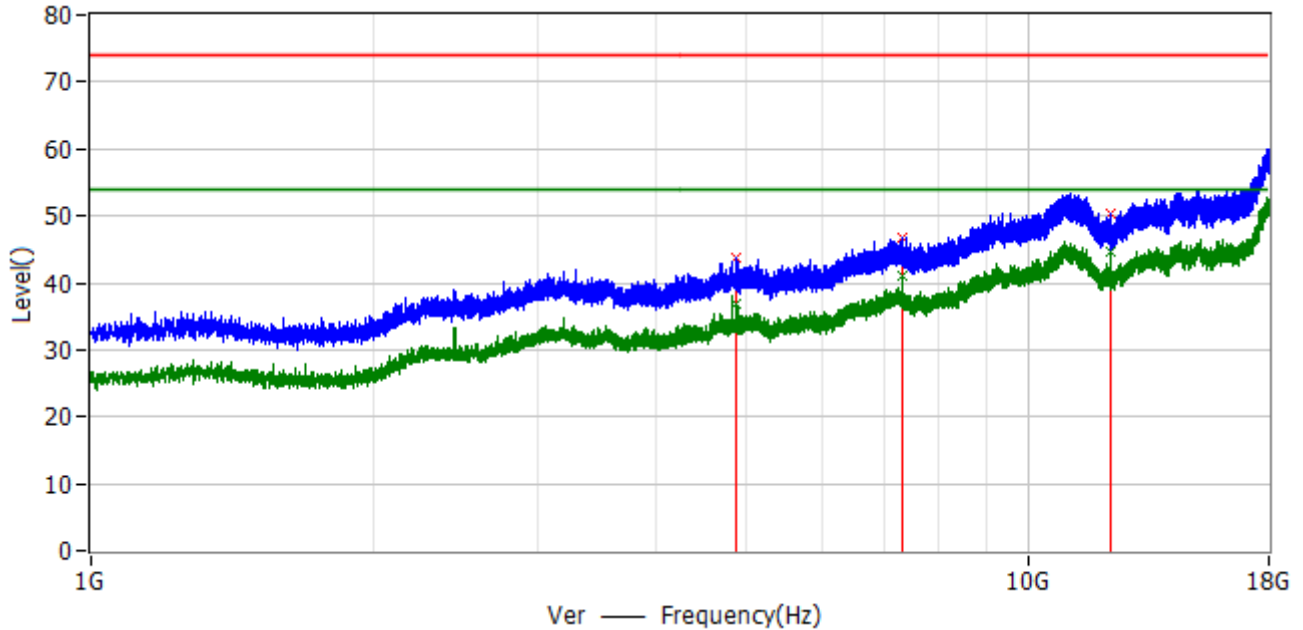


No.	Frequency	Limit (dBuV/m)	Level (dBuV/m)	Delta dB	Factor dB	Detector	Polar
1*	4.879 GHz	74.0	43.6	-30.4	-8.2	PK	Ver
2*	7.322 GHz	74.0	46.6	-27.4	-3.1	PK	Ver
3*	12.203 GHz	74.0	50.3	-23.7	2.2	PK	Ver
4*	4.880 GHz	54.0	37.0	-17.0	-8.2	AV	Ver
5*	7.322 GHz	54.0	41.1	-12.9	-3.1	AV	Ver
6*	12.198 GHz	54.0	44.6	-9.4	2.2	AV	Ver

Profile: 2260060R	Page No.: 10
Engineer: Zed	
Site: EPINTEK	Time: 2022/07/12
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Horizontal
EUT: LED Lamp	Power: AC 120V/60Hz
Note: Mode 2:Transmit at 2440MHz by LE_2Mbps	

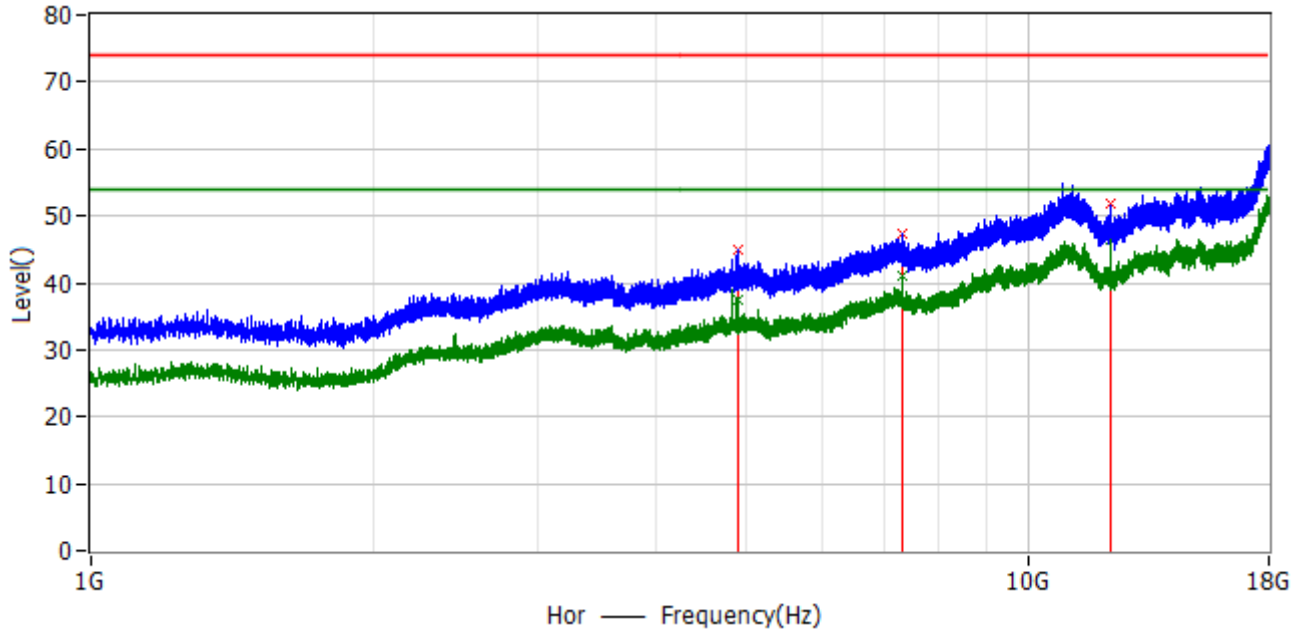


No.	Frequency	Limit (dBuV/m)	Level (dBuV/m)	Delta dB	Factor dB	Detector	Polar
1*	4.881 GHz	74.0	45.0	-29.0	-8.2	PK	Hor
2*	7.321 GHz	74.0	47.3	-26.7	-3.1	PK	Hor
3*	12.202 GHz	74.0	51.7	-22.3	2.2	PK	Hor
4*	4.882 GHz	54.0	37.6	-16.4	-8.2	AV	Hor
5*	7.322 GHz	54.0	41.0	-13.0	-3.1	AV	Hor
6*	12.198 GHz	54.0	46.4	-7.6	2.2	AV	Hor

Profile: 2260060R	Page No.: 11
Engineer: Zed	
Site: EPINTEK	Time: 2022/07/12
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Vertical
EUT: LED Lamp	Power: AC 120V/60Hz
Note: Mode 2:Transmit at 2480MHz by LE_2Mbps	

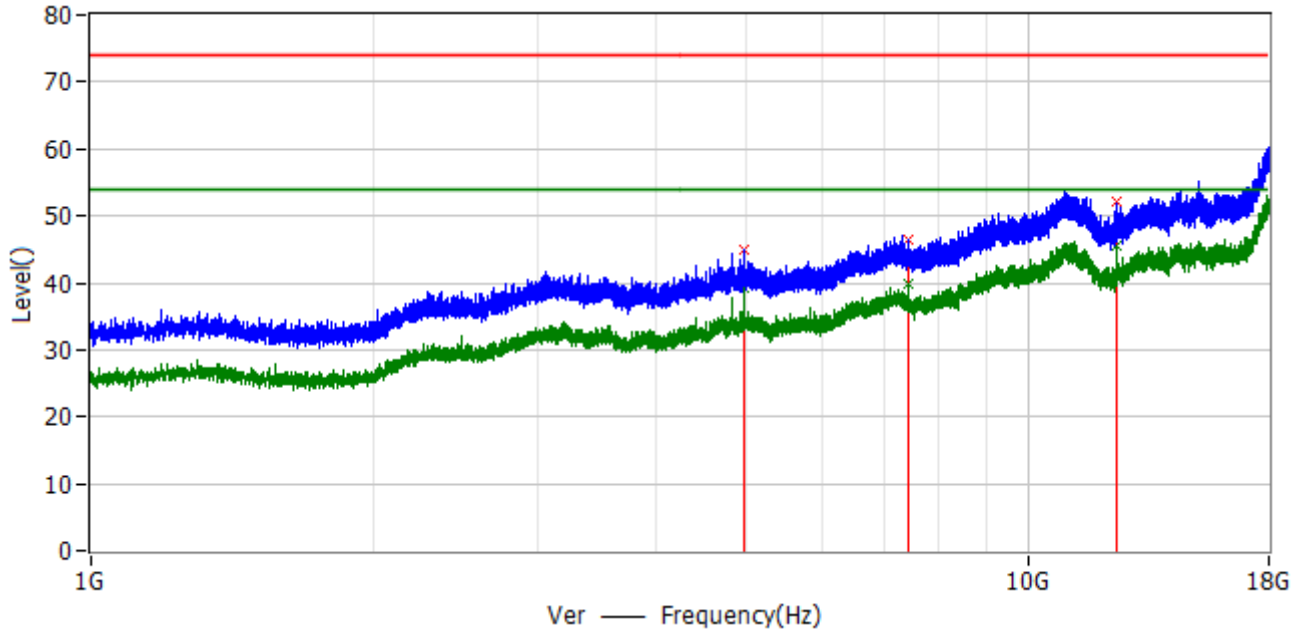


No.	Frequency	Limit (dBuV/m)	Level (dBuV/m)	Delta dB	Factor dB	Detector	Polar
1*	4.961 GHz	74.0	44.9	-29.1	-7.9	PK	Ver
2*	7.439 GHz	74.0	46.4	-27.6	-3.1	PK	Ver
3*	12.398 GHz	74.0	52.0	-22.0	2.2	PK	Ver
4*	4.962 GHz	54.0	39.2	-14.8	-7.9	AV	Ver
5*	7.439 GHz	54.0	40.0	-14.0	-3.1	AV	Ver
6*	12.399 GHz	54.0	45.6	-8.4	2.2	AV	Ver

Profile: 2260060R	Page No.: 12
Engineer: Zed	
Site: EPINTEK	Time: 2022/07/12
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Horizontal
EUT: LED Lamp	Power: AC 120V/60Hz
Note: Mode 2:Transmit at 2480MHz by LE_2Mbps	

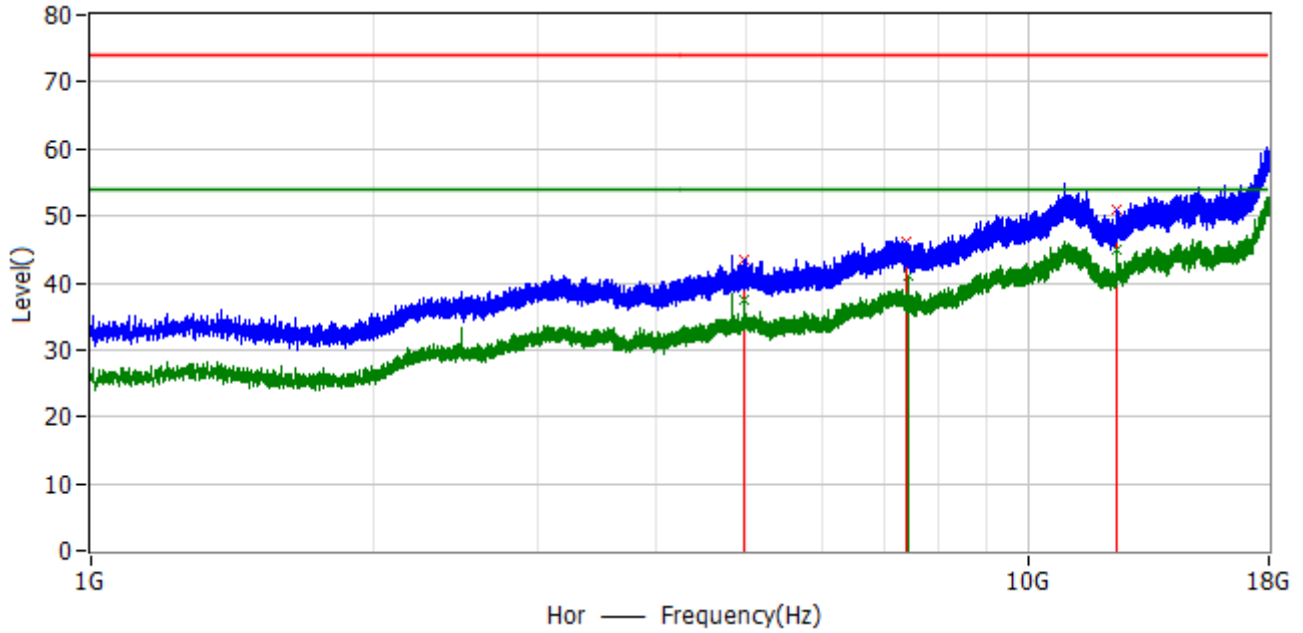


No.	Frequency	Limit (dBuV/m)	Level (dBuV/m)	Delta dB	Factor dB	Detector	Polar
1*	4.960 GHz	74.0	43.4	-30.6	-7.9	PK	Hor
2*	7.398 GHz	74.0	46.2	-27.8	-3.1	PK	Hor
3*	12.402 GHz	74.0	51.0	-23.0	2.2	PK	Hor
4*	4.960 GHz	54.0	37.5	-16.5	-7.9	AV	Hor
5*	7.439 GHz	54.0	41.0	-13.0	-3.1	AV	Hor
6*	12.402 GHz	54.0	44.8	-9.2	2.2	AV	Hor

Profile: 2260060R	Page No.: 13
Engineer: Zed	
Site: EPINTEK	Time: 2022/07/12
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Vertical
EUT: LED Lamp	Power: AC 120V/60Hz
Note: Mode 3:Transmit at 2402MHz by Coded S=2	

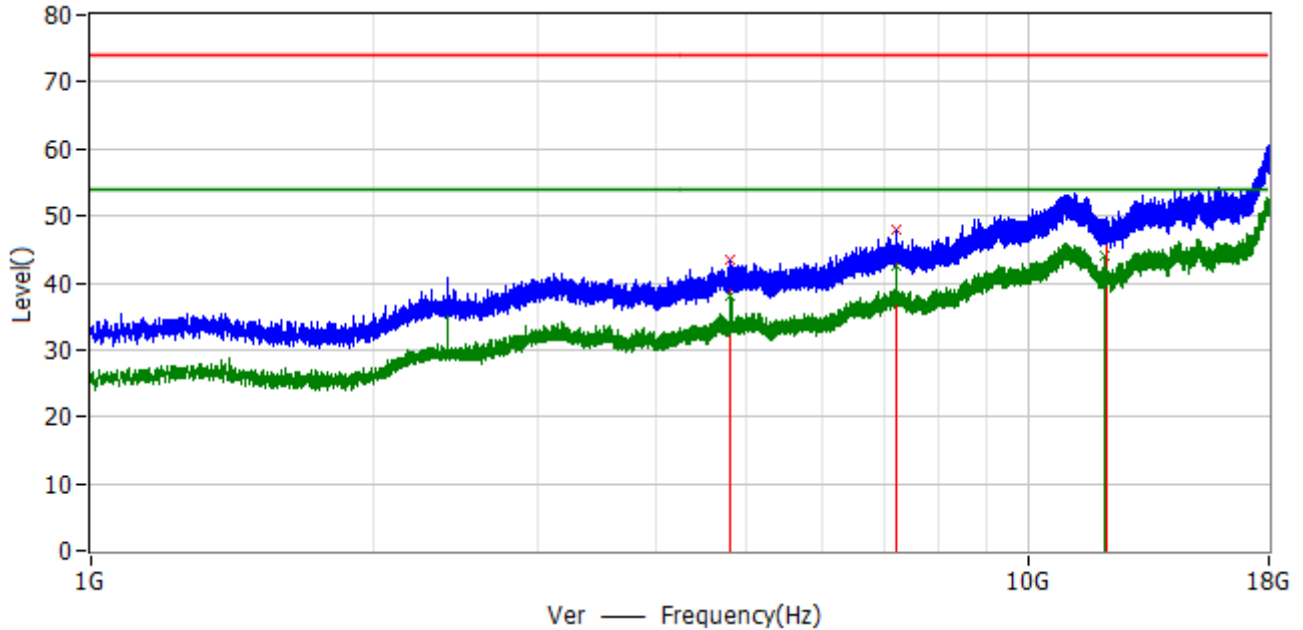


No.	Frequency	Limit (dBuV/m)	Level (dBuV/m)	Delta dB	Factor dB	Detector	Polar
1*	4.804 GHz	74.0	43.5	-30.5	-8.4	PK	Ver
2*	7.207 GHz	74.0	47.8	-26.2	-3.1	PK	Ver
3*	12.100 GHz	74.0	47.7	-26.3	2.0	PK	Ver
4*	4.805 GHz	54.0	38.2	-15.8	-8.4	AV	Ver
5*	7.206 GHz	54.0	42.6	-11.4	-3.1	AV	Ver
6*	12.011 GHz	54.0	44.1	-9.9	1.7	AV	Ver

Profile: 2260060R	Page No.: 14
Engineer: Zed	
Site: EPINTEK	Time: 2022/07/12
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Horizontal
EUT: LED Lamp	Power: AC 120V/60Hz
Note: Mode 3:Transmit at 2402MHz by Coded S=2	

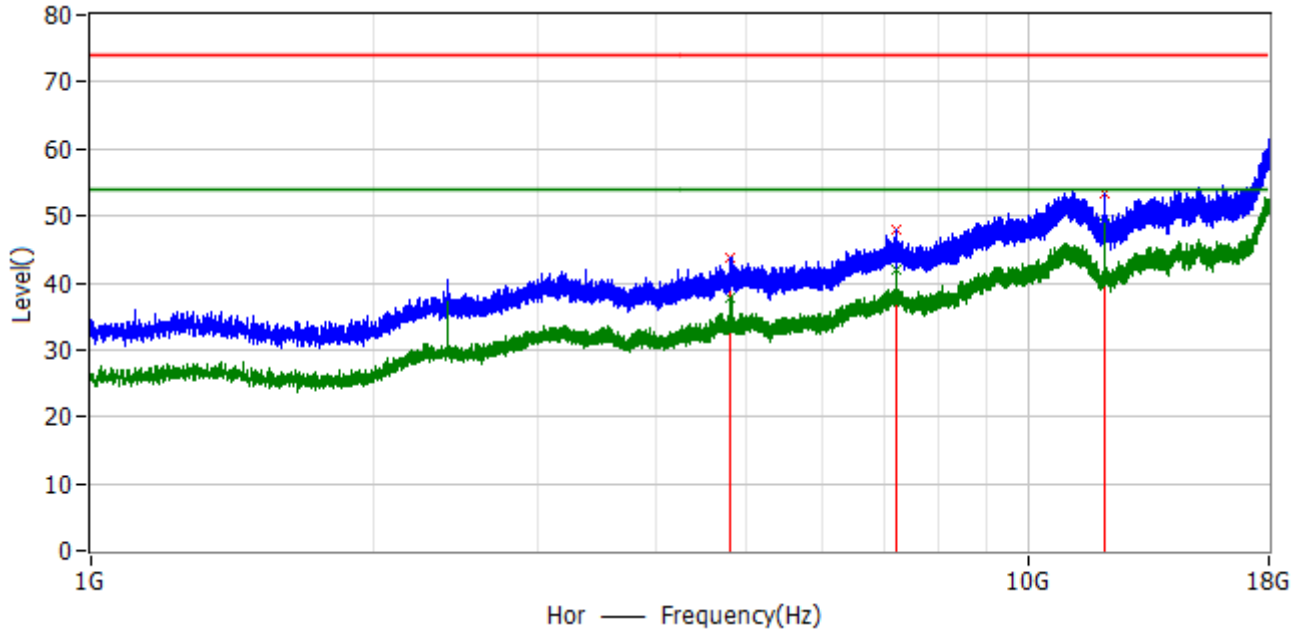


No.	Frequency	Limit (dBuV/m)	Level (dBuV/m)	Delta dB	Factor dB	Detector	Polar
1*	4.805 GHz	74.0	43.7	-30.3	-8.4	PK	Hor
2*	7.207 GHz	74.0	47.9	-26.1	-3.1	PK	Hor
3*	12.011 GHz	74.0	53.4	-20.6	1.7	PK	Hor
4*	4.805 GHz	54.0	37.7	-16.3	-8.4	AV	Hor
5*	7.206 GHz	54.0	41.9	-12.1	-3.1	AV	Hor
6*	12.009 GHz	54.0	48.9	-5.1	1.7	AV	Hor

Profile: 2260060R	Page No.: 15
Engineer: Zed	
Site: EPINTEK	Time: 2022/07/12
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Vertical
EUT: LED Lamp	Power: AC 120V/60Hz
Note: Mode 3:Transmit at 2440MHz by Coded S=2	

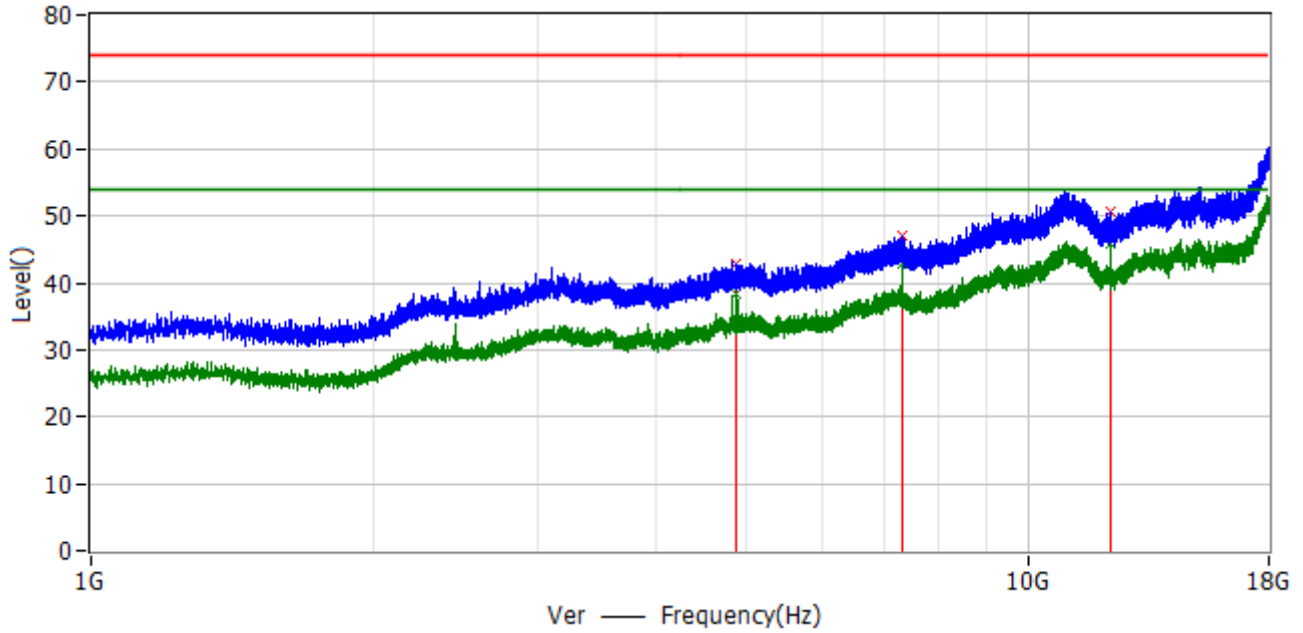


No.	Frequency	Limit (dBuV/m)	Level (dBuV/m)	Delta dB	Factor dB	Detector	Polar
1*	4.879 GHz	74.0	42.9	-31.1	-8.2	PK	Ver
2*	7.318 GHz	74.0	47.0	-27.0	-3.1	PK	Ver
3*	12.201 GHz	74.0	50.7	-23.3	2.2	PK	Ver
4*	4.880 GHz	54.0	38.4	-15.6	-8.2	AV	Ver
5*	7.320 GHz	54.0	42.8	-11.2	-3.1	AV	Ver
6*	12.199 GHz	54.0	45.8	-8.2	2.2	AV	Ver

Profile: 2260060R	Page No.: 16
Engineer: Zed	
Site: EPINTEK	Time: 2022/07/12
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Horizontal
EUT: LED Lamp	Power: AC 120V/60Hz
Note: Mode 3:Transmit at 2440MHz by Coded S=2	

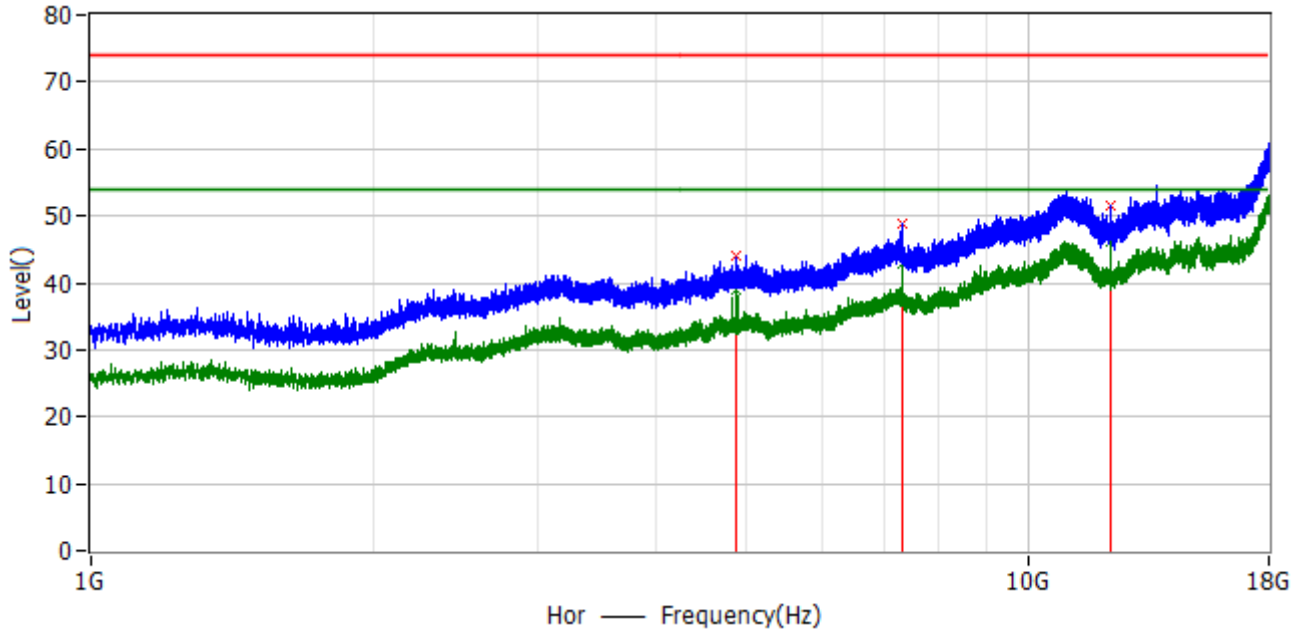


No.	Frequency	Limit (dBuV/m)	Level (dBuV/m)	Delta dB	Factor dB	Detector	Polar
1*	4.880 GHz	74.0	43.9	-30.1	-8.2	PK	Hor
2*	7.319 GHz	74.0	48.9	-25.1	-3.1	PK	Hor
3*	12.199 GHz	74.0	51.6	-22.4	2.2	PK	Hor
4*	4.880 GHz	54.0	39.0	-15.0	-8.2	AV	Hor
5*	7.320 GHz	54.0	42.7	-11.3	-3.1	AV	Hor
6*	12.202 GHz	54.0	46.2	-7.8	2.2	AV	Hor

Profile: 2260060R	Page No.: 17
Engineer: Zed	
Site: EPINTEK	Time: 2022/07/12
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Vertical
EUT: LED Lamp	Power: AC 120V/60Hz
Note: Mode 3:Transmit at 2480MHz by Coded S=2	

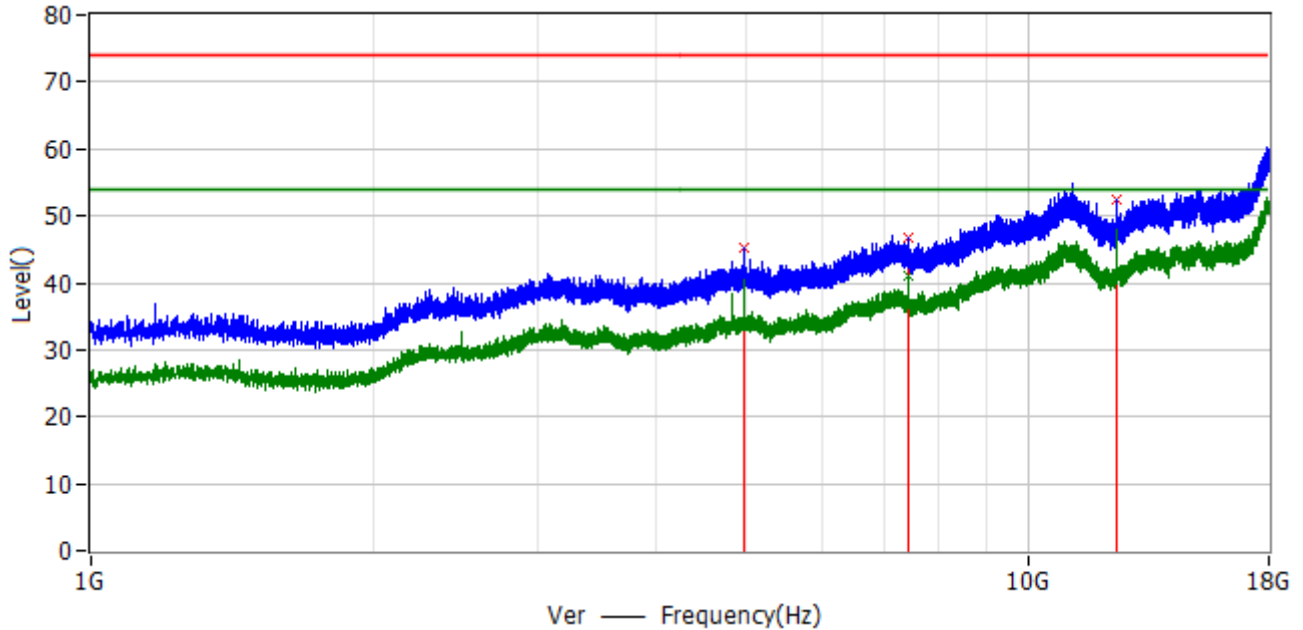


No.	Frequency	Limit (dBuV/m)	Level (dBuV/m)	Delta dB	Factor dB	Detector	Polar
1*	4.960 GHz	74.0	45.3	-28.7	-7.9	PK	Ver
2*	7.440 GHz	74.0	46.7	-27.3	-3.1	PK	Ver
3*	12.399 GHz	74.0	52.5	-21.5	2.2	PK	Ver
4*	4.960 GHz	54.0	40.5	-13.5	-7.9	AV	Ver
5*	7.440 GHz	54.0	41.1	-12.9	-3.1	AV	Ver
6*	12.402 GHz	54.0	48.1	-5.9	2.2	AV	Ver

Profile: 2260060R	Page No.: 18
Engineer: Zed	
Site: EPINTEK	Time: 2022/07/12
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Horizontal
EUT: LED Lamp	Power: AC 120V/60Hz
Note: Mode 3:Transmit at 2480MHz by Coded S=2	

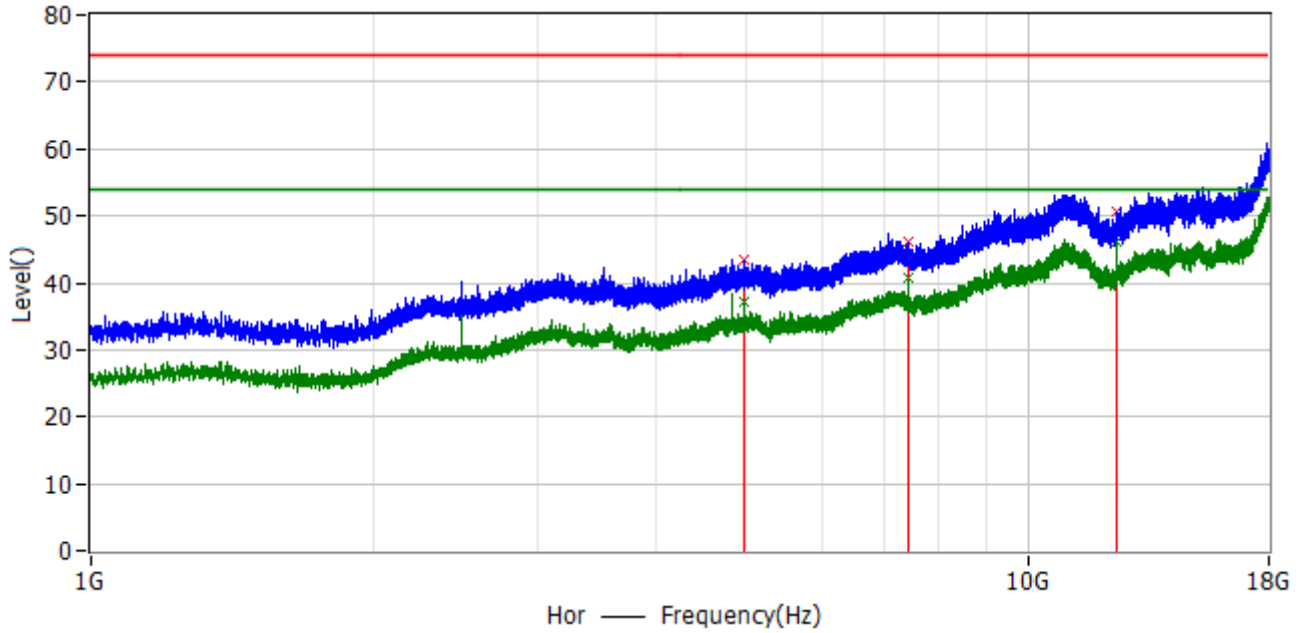


No.	Frequency	Limit (dBuV/m)	Level (dBuV/m)	Delta dB	Factor dB	Detector	Polar
1*	4.959 GHz	74.0	43.5	-30.5	-7.9	PK	Hor
2*	7.441 GHz	74.0	46.1	-27.9	-3.1	PK	Hor
3*	12.401 GHz	74.0	50.5	-23.5	2.2	PK	Hor
4*	4.961 GHz	54.0	37.2	-16.8	-7.9	AV	Hor
5*	7.440 GHz	54.0	40.6	-13.4	-3.1	AV	Hor
6*	12.399 GHz	54.0	46.1	-7.9	2.2	AV	Hor

Profile: 2260060R	Page No.: 19
Engineer: Zed	
Site: EPINTEK	Time: 2022/07/12
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Vertical
EUT: LED Lamp	Power: AC 120V/60Hz
Note: Mode 4:Transmit at 2402MHz by Coded S=8	

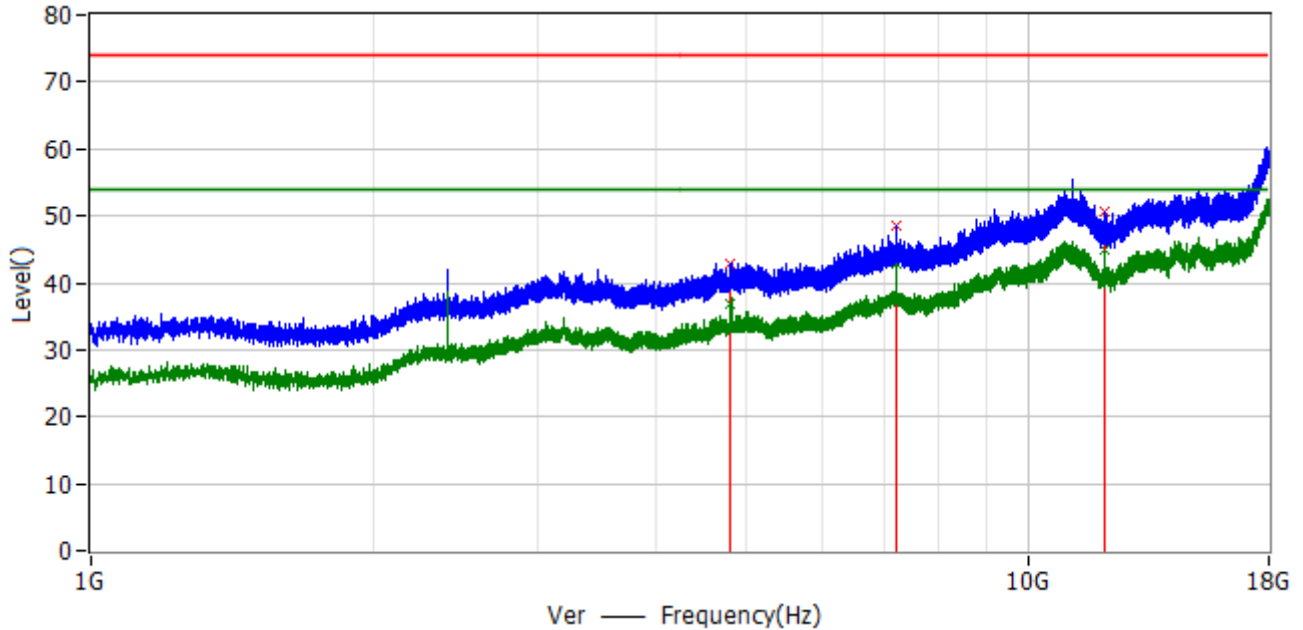


No.	Frequency	Limit (dBuV/m)	Level (dBuV/m)	Delta dB	Factor dB	Detector	Polar
1*	4.804 GHz	74.0	42.8	-31.2	-8.4	PK	Ver
2*	7.207 GHz	74.0	48.4	-25.6	-3.1	PK	Ver
3*	12.011 GHz	74.0	50.6	-23.4	1.7	PK	Ver
4*	4.804 GHz	54.0	36.9	-17.1	-8.4	AV	Ver
5*	7.207 GHz	54.0	42.8	-11.2	-3.1	AV	Ver
6*	12.012 GHz	54.0	44.8	-9.2	1.7	AV	Ver

Profile: 2260060R	Page No.: 20
Engineer: Zed	
Site: EPINTEK	Time: 2022/07/12
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Horizontal
EUT: LED Lamp	Power: AC 120V/60Hz
Note: Mode 4:Transmit at 2402MHz by Coded S=8	

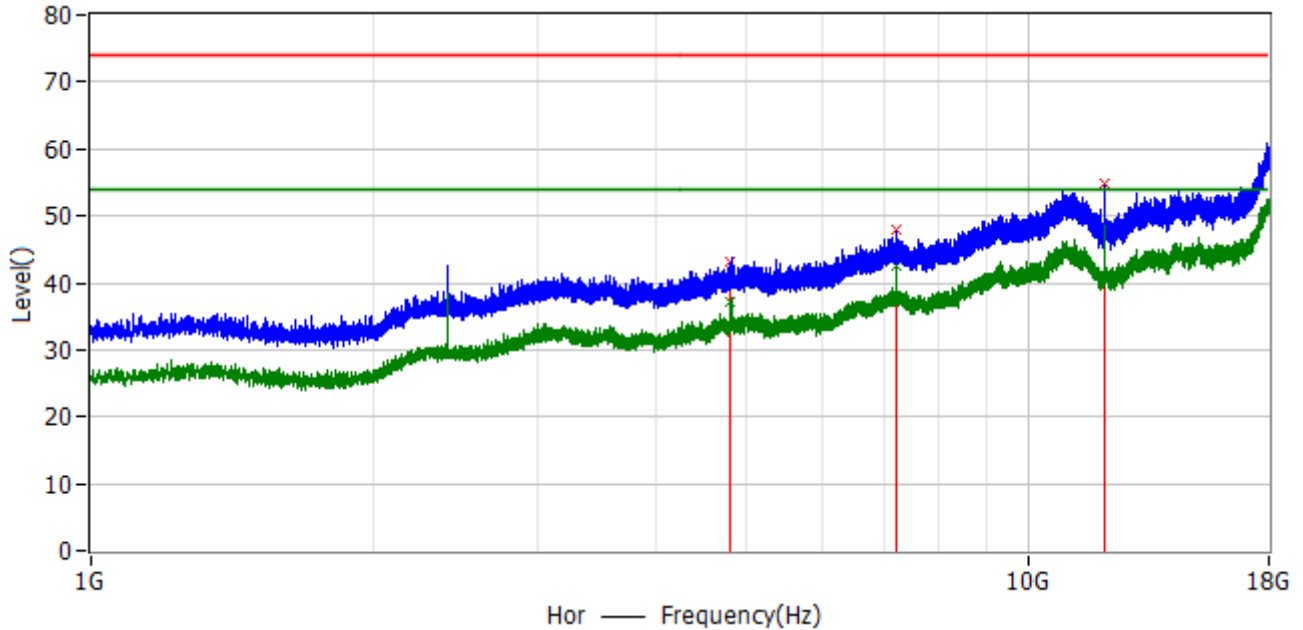


No.	Frequency	Limit (dBuV/m)	Level (dBuV/m)	Delta dB	Factor dB	Detector	Polar
1*	4.805 GHz	74.0	43.0	-31.0	-8.4	PK	Hor
2*	7.207 GHz	74.0	47.8	-26.2	-3.1	PK	Hor
3*	12.011 GHz	74.0	54.7	-19.3	1.7	PK	Hor
4*	4.805 GHz	54.0	37.2	-16.8	-8.4	AV	Hor
5*	7.207 GHz	54.0	42.5	-11.5	-3.1	AV	Hor
6*	12.009 GHz	54.0	48.6	-5.4	1.7	AV	Hor

Profile: 2260060R	Page No.: 21
Engineer: Zed	
Site: EPINTEK	Time: 2022/07/12
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Vertical
EUT: LED Lamp	Power: AC 120V/60Hz
Note: Mode 4:Transmit at 2440MHz by Coded S=8	

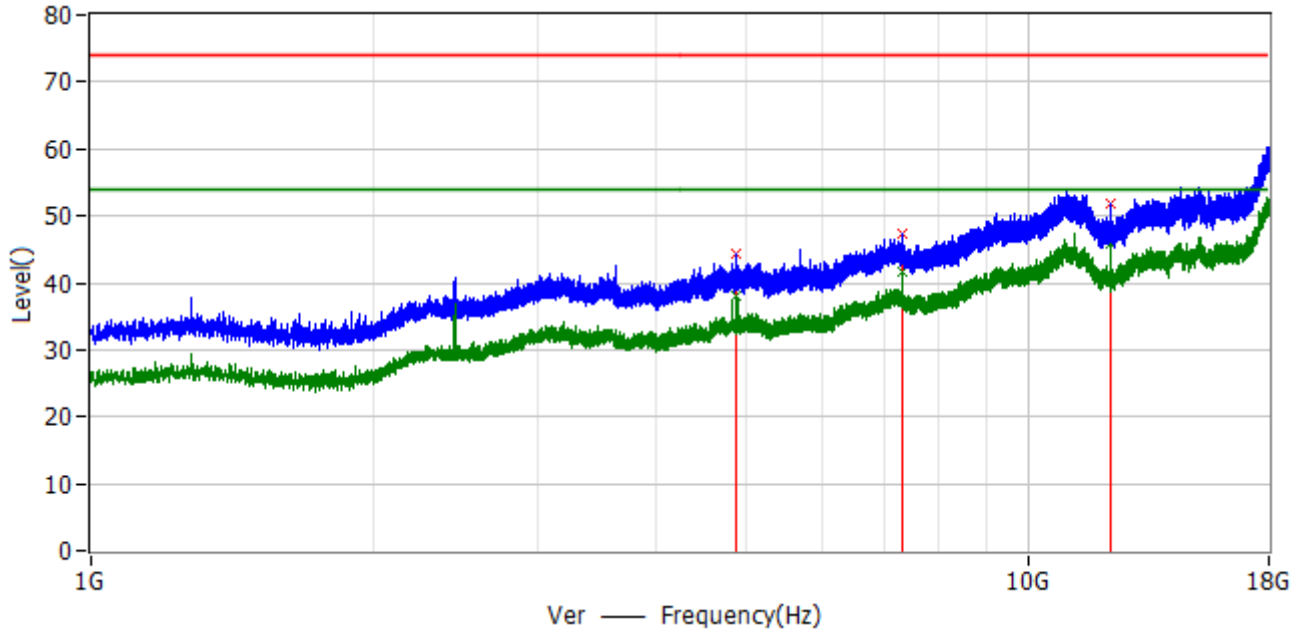


No.	Frequency	Limit (dBuV/m)	Level (dBuV/m)	Delta dB	Factor dB	Detector	Polar
1*	4.880 GHz	74.0	44.4	-29.6	-8.2	PK	Ver
2*	7.321 GHz	74.0	47.2	-26.8	-3.1	PK	Ver
3*	12.198 GHz	74.0	51.8	-22.2	2.2	PK	Ver
4*	4.880 GHz	54.0	38.0	-16.0	-8.2	AV	Ver
5*	7.321 GHz	54.0	41.5	-12.5	-3.1	AV	Ver
6*	12.202 GHz	54.0	45.7	-8.3	2.2	AV	Ver

Profile: 2260060R	Page No.: 22
Engineer: Zed	
Site: EPINTEK	Time: 2022/07/12
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Horizontal
EUT: LED Lamp	Power: AC 120V/60Hz
Note: Mode 4:Transmit at 2440MHz by Coded S=8	

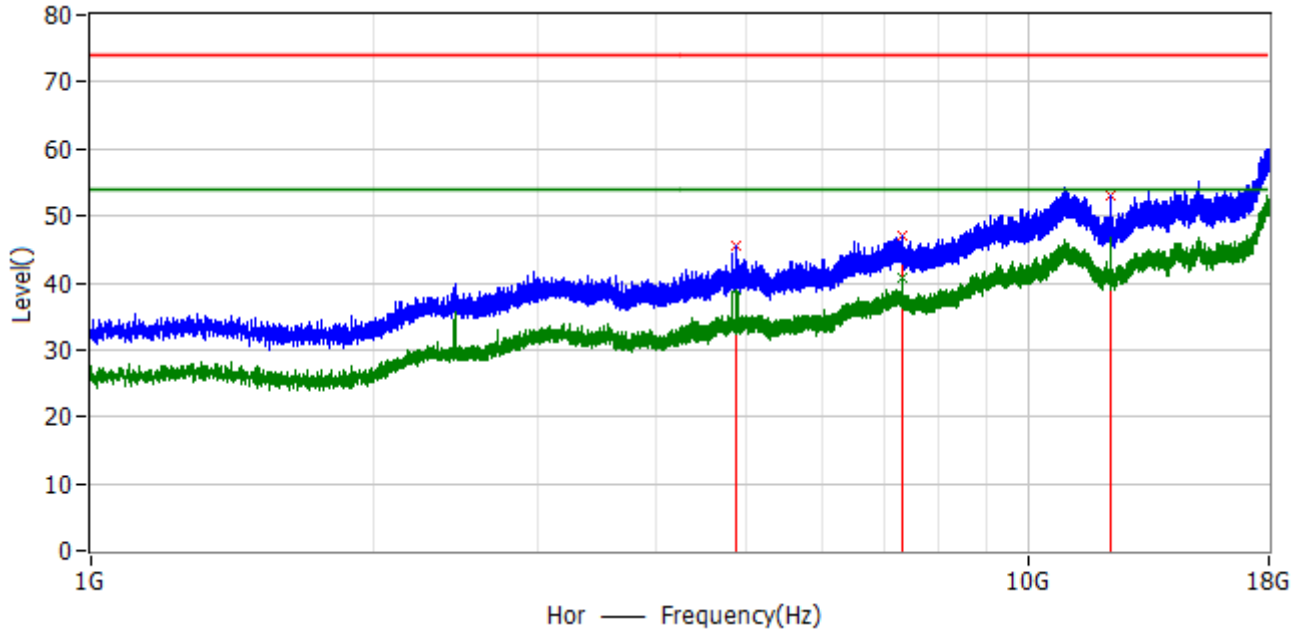


No.	Frequency	Limit (dBuV/m)	Level (dBuV/m)	Delta dB	Factor dB	Detector	Polar
1*	4.880 GHz	74.0	45.4	-28.6	-8.2	PK	Hor
2*	7.321 GHz	74.0	46.9	-27.1	-3.1	PK	Hor
3*	12.202 GHz	74.0	52.9	-21.1	2.2	PK	Hor
4*	4.880 GHz	54.0	38.9	-15.1	-8.2	AV	Hor
5*	7.321 GHz	54.0	40.6	-13.4	-3.1	AV	Hor
6*	12.202 GHz	54.0	46.6	-7.4	2.2	AV	Hor

Profile: 2260060R	Page No.: 23
Engineer: Zed	
Site: EPINTEK	Time: 2022/07/12
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Vertical
EUT: LED Lamp	Power: AC 120V/60Hz
Note: Mode 4:Transmit at 2480MHz by Coded S=8	

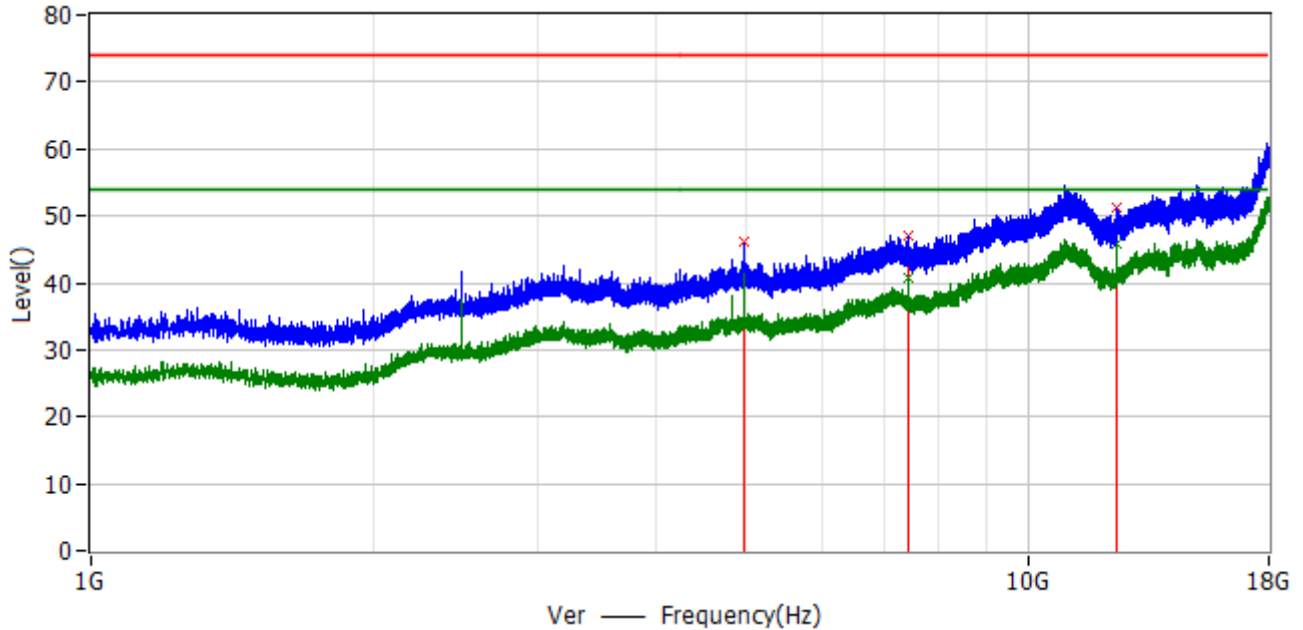

No.	Frequency	Limit (dBuV/m)	Level (dBuV/m)	Delta dB	Factor dB	Detector	Polar
1*	4.960 GHz	74.0	46.0	-28.0	-7.9	PK	Ver
2*	7.441 GHz	74.0	46.9	-27.1	-3.1	PK	Ver
3*	12.399 GHz	74.0	51.3	-22.7	2.2	PK	Ver
4*	4.961 GHz	54.0	41.4	-12.6	-7.9	AV	Ver
5*	7.441 GHz	54.0	40.7	-13.3	-3.1	AV	Ver
6*	12.399 GHz	54.0	45.9	-8.1	2.2	AV	Ver

Profile: 2260060R	Page No.: 24
Engineer: Zed	
Site: EPINTEK	Time: 2022/07/12
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Horizontal
EUT: LED Lamp	Power: AC 120V/60Hz
Note: Mode 4:Transmit at 2480MHz by Coded S=8	

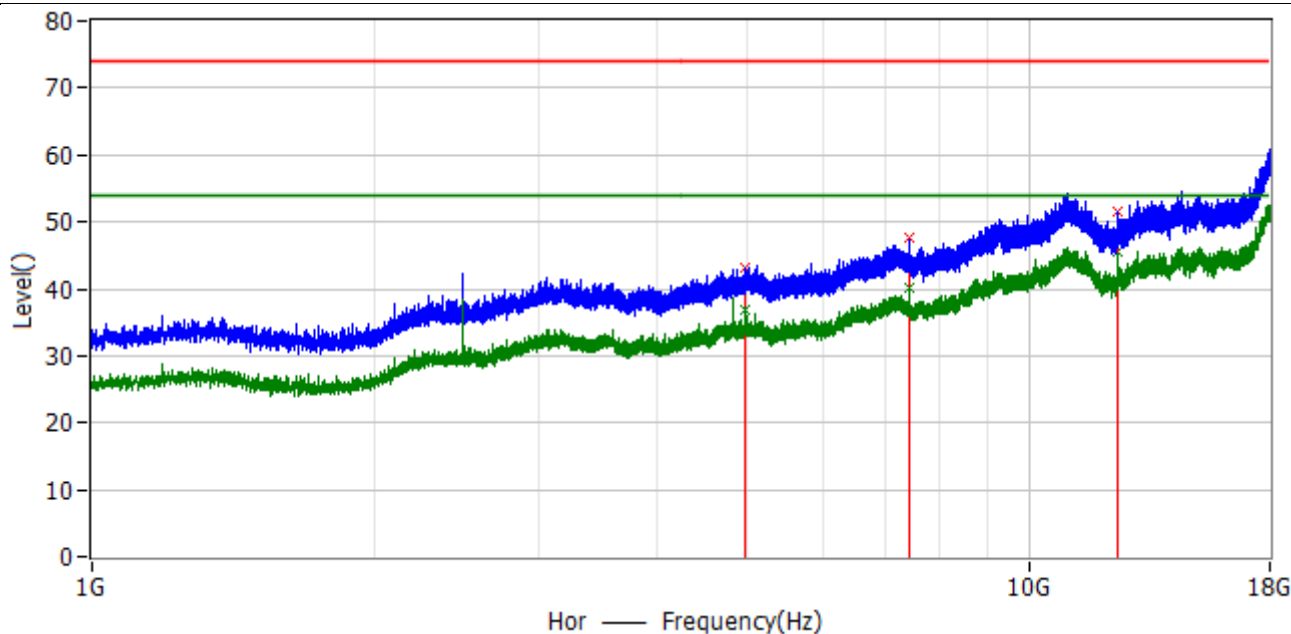


No.	Frequency	Limit (dBuV/m)	Level (dBuV/m)	Delta dB	Factor dB	Detector	Polar
1*	4.960 GHz	74.0	43.0	-31.0	-7.9	PK	Hor
2*	7.439 GHz	74.0	47.5	-26.5	-3.1	PK	Hor
3*	12.401 GHz	74.0	51.4	-22.6	2.2	PK	Hor
4*	4.961 GHz	54.0	37.0	-17.0	-7.9	AV	Hor
5*	7.441 GHz	54.0	40.1	-13.9	-3.1	AV	Hor
6*	12.402 GHz	54.0	45.4	-8.6	2.2	AV	Hor

Note:

1. The test frequency range, 9kHz~30MHz and Above 18GHz worst case are at least 6dB below the limits, therefore no data appear in the report.


The worst case of Radiated Emission below 1GHz:

Profile:2260060R	Page No.: 69
Engineer: Yu Liu	
Site: AC2	Time: 2022/07/04 - 22:45
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: AC2_3M(30-1000M)	Polarity: Horizontal
EUT: LED Lamp	Power: AC 120V/60Hz
Note: Mode 1: Transmit at 2402MHz by LE_1Mbps	

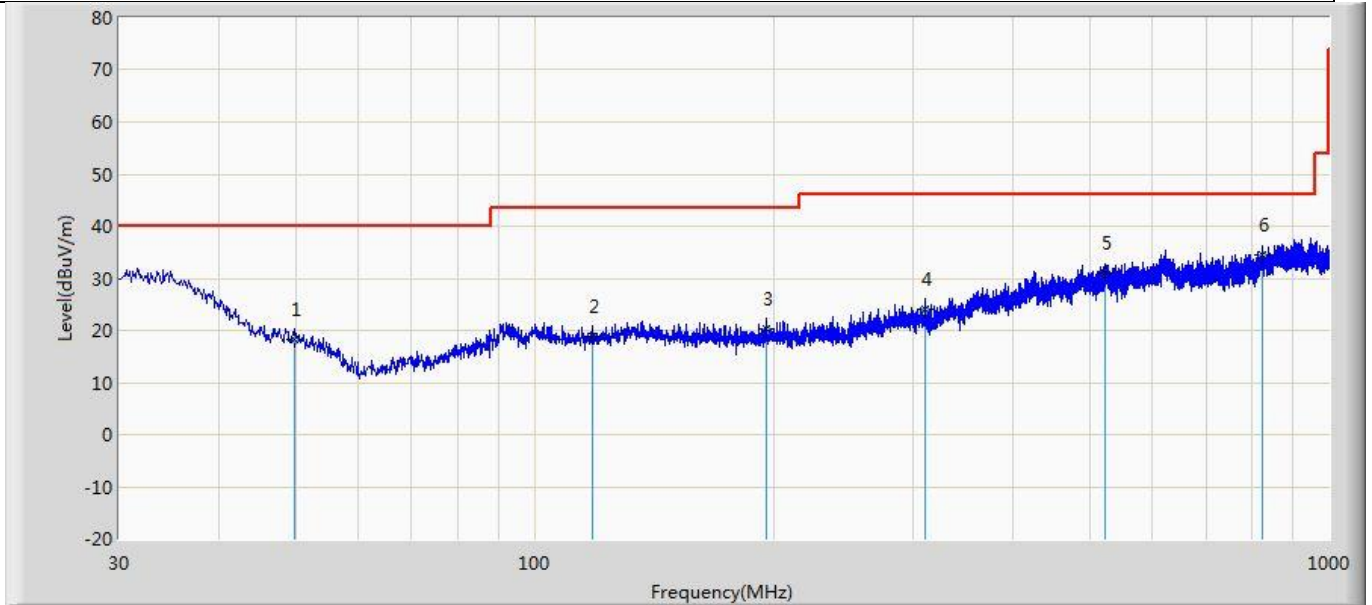

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		49.885	18.209	2.387	-21.791	40.000	15.821	QP
2		118.149	18.896	2.320	-24.604	43.500	16.576	QP
3		195.870	20.419	2.855	-23.081	43.500	17.564	QP
4		310.694	23.950	2.822	-22.050	46.000	21.128	QP
5		522.154	30.870	2.154	-15.130	46.000	28.716	QP
6	*	826.249	34.362	2.703	-11.638	46.000	31.659	QP

Profile:2260060R	Page No.: 70
Engineer: Yu Liu	
Site: AC2	Time: 2022/07/04 - 22:45
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: AC2_3M(30-1000M)	Polarity: Vertical
EUT: LED Lamp	Power: AC 120V/60Hz
Note: Mode 1: Transmit at 2402MHz by LE_1Mbps	

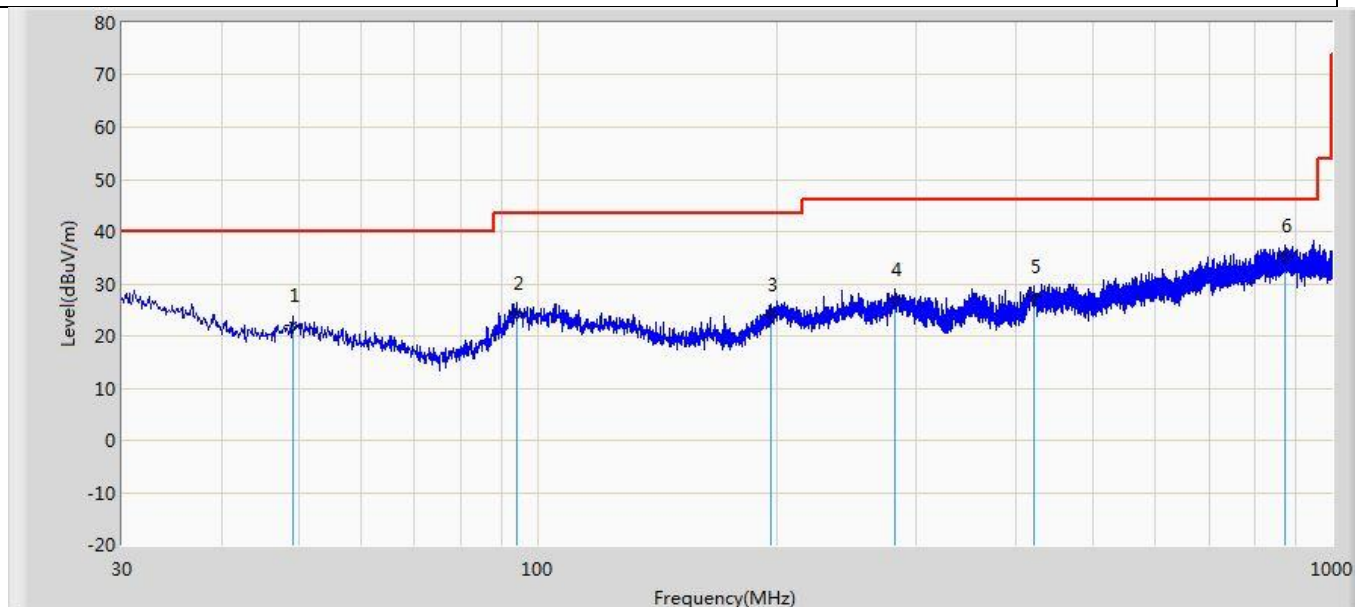

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		49.158	21.903	2.579	-18.097	40.000	19.325	QP
2		94.141	24.304	4.900	-19.196	43.500	19.404	QP
3		196.355	24.109	1.558	-19.391	43.500	22.551	QP
4		281.957	26.915	1.859	-19.085	46.000	25.055	QP
5		420.789	27.640	0.949	-18.360	46.000	26.691	QP
6	*	873.172	35.484	2.466	-10.516	46.000	33.018	QP

Note:

1. All Readings below 1GHz are Quasi-Peak, above are performed with peak and/or average measurements as necessary.
2. " * ", means this data is the worst emission level.
3. Measurement Level = Reading Level + Factor(Probe+Cable-Amp).

4.3 Emissions in non-restricted frequency band	VERDICT: PASS
---	----------------------


4.3.1 Limit

Standard	FCC Part 15 Subpart C Paragraph 15.247(d)
RF Output power (Detection methods)	Limit(dB)
RF Output power(Average detector)	30dBc(Note1)
RF Output power(PK detector)	20dBc(Note2)

Note 1: If maximum conducted (average) output power was used to demonstrate compliance as described in 9.2, then the peak power in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 30 dB relative to the maximum in-band peak PSD level in 100 kHz (i.e., 30 dBc).

Note 2: If the maximum peak conducted output power procedure was used, then the peak output power measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz (i.e., 20 dBc).


4.3.2 Test Setup

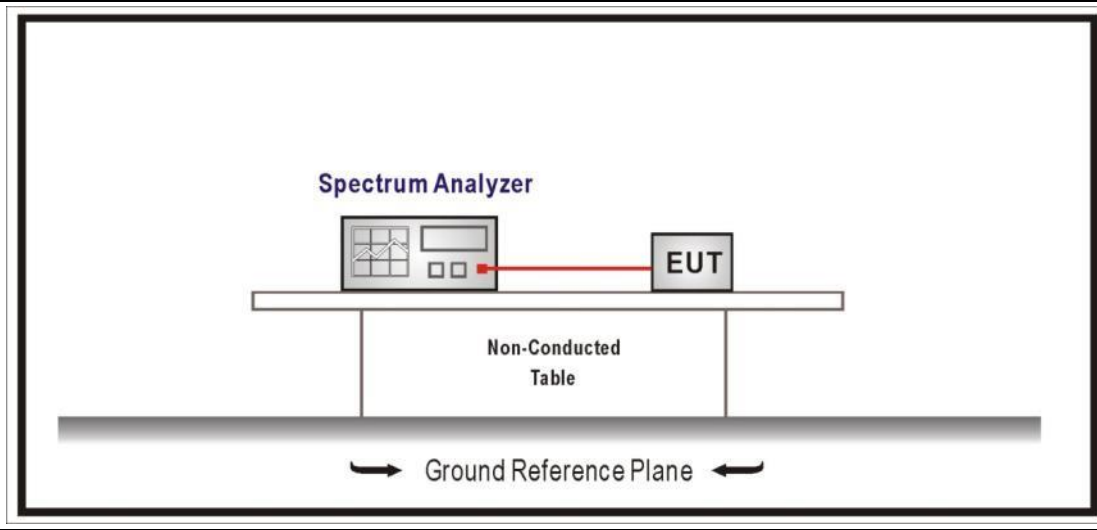








4.3.3 Test Procedure

References Rule	Chapter	Description
<input checked="" type="checkbox"/> ANSI C63.10	11.11	Emissions in non-restricted frequency bands
<input checked="" type="checkbox"/> ANSI C63.10	11.11.1	General
<input checked="" type="checkbox"/> ANSI C63.10	11.11.2	Reference level measurement
<input checked="" type="checkbox"/> ANSI C63.10	11.11.3	Emission level measurement



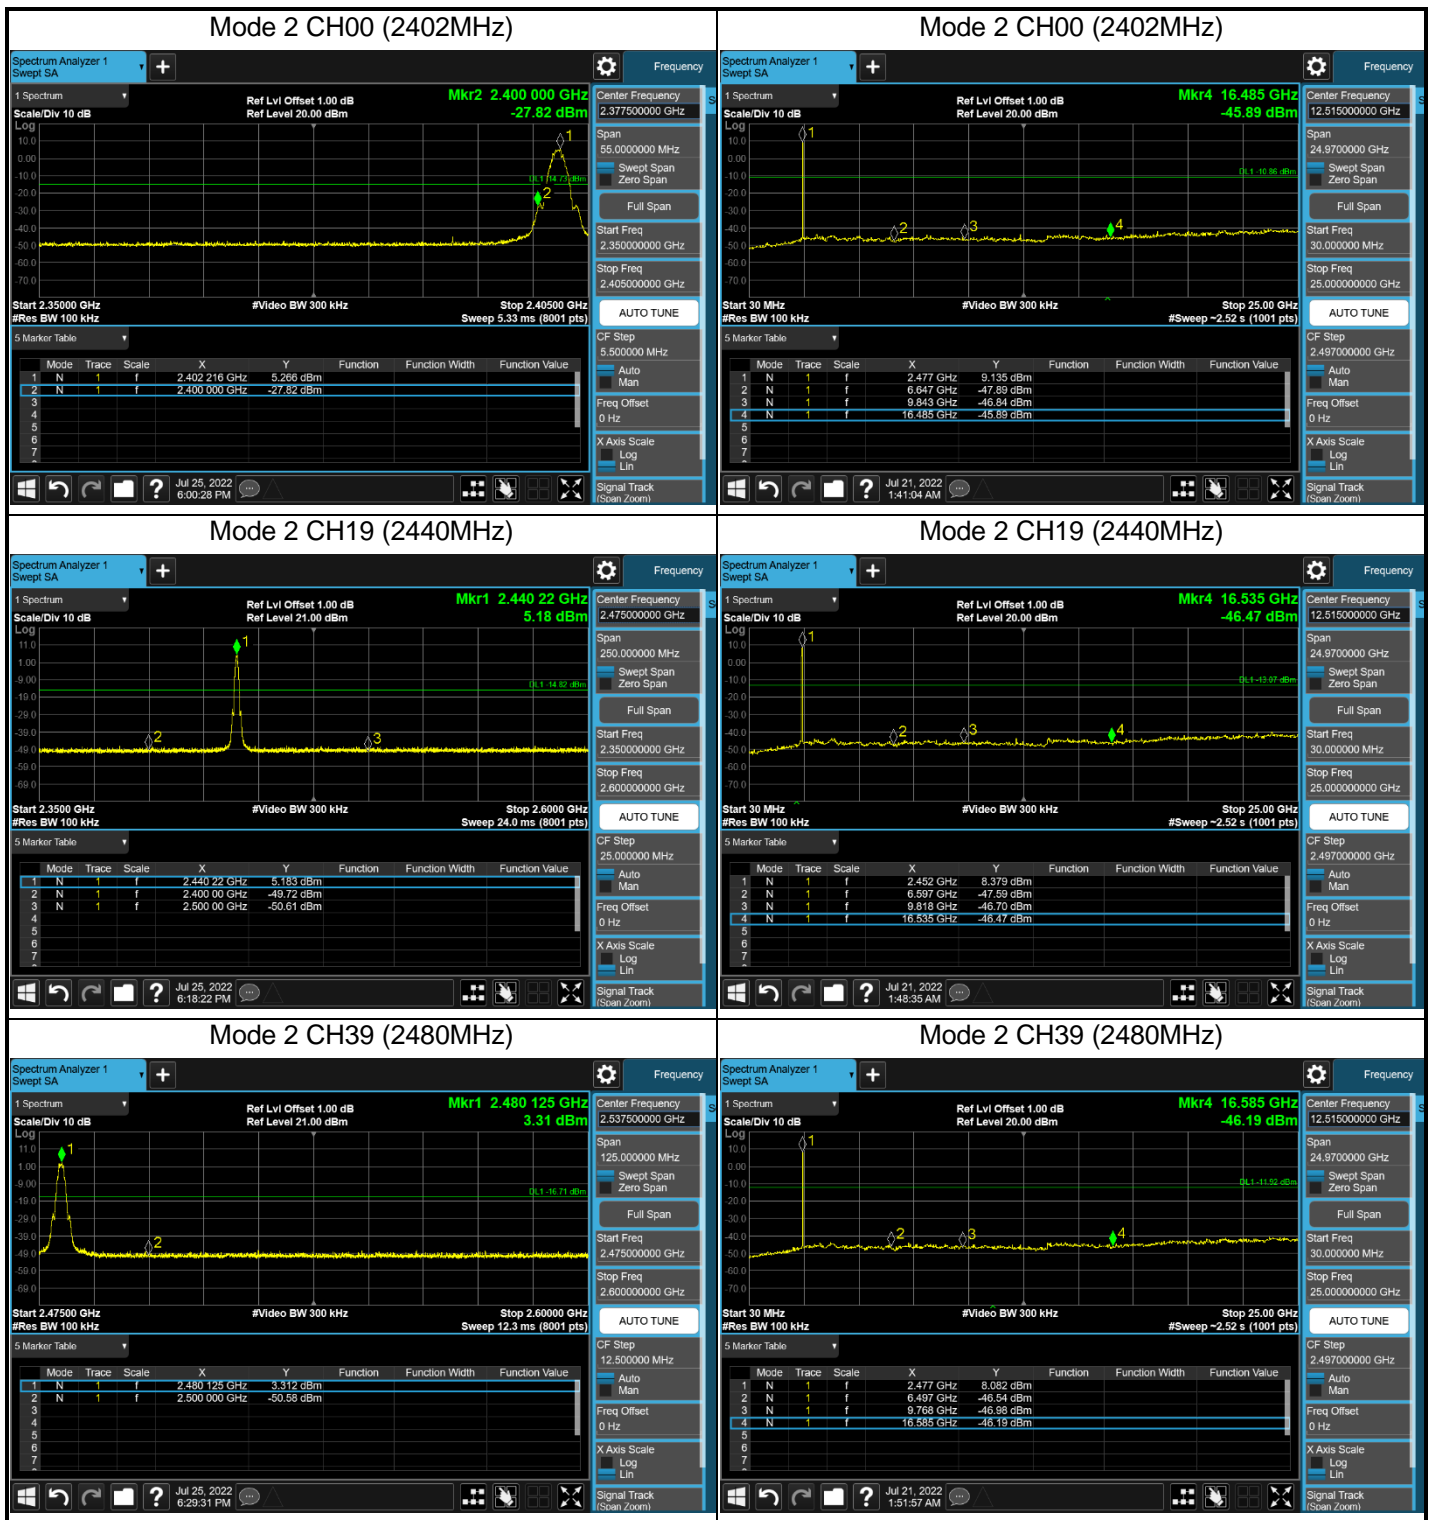

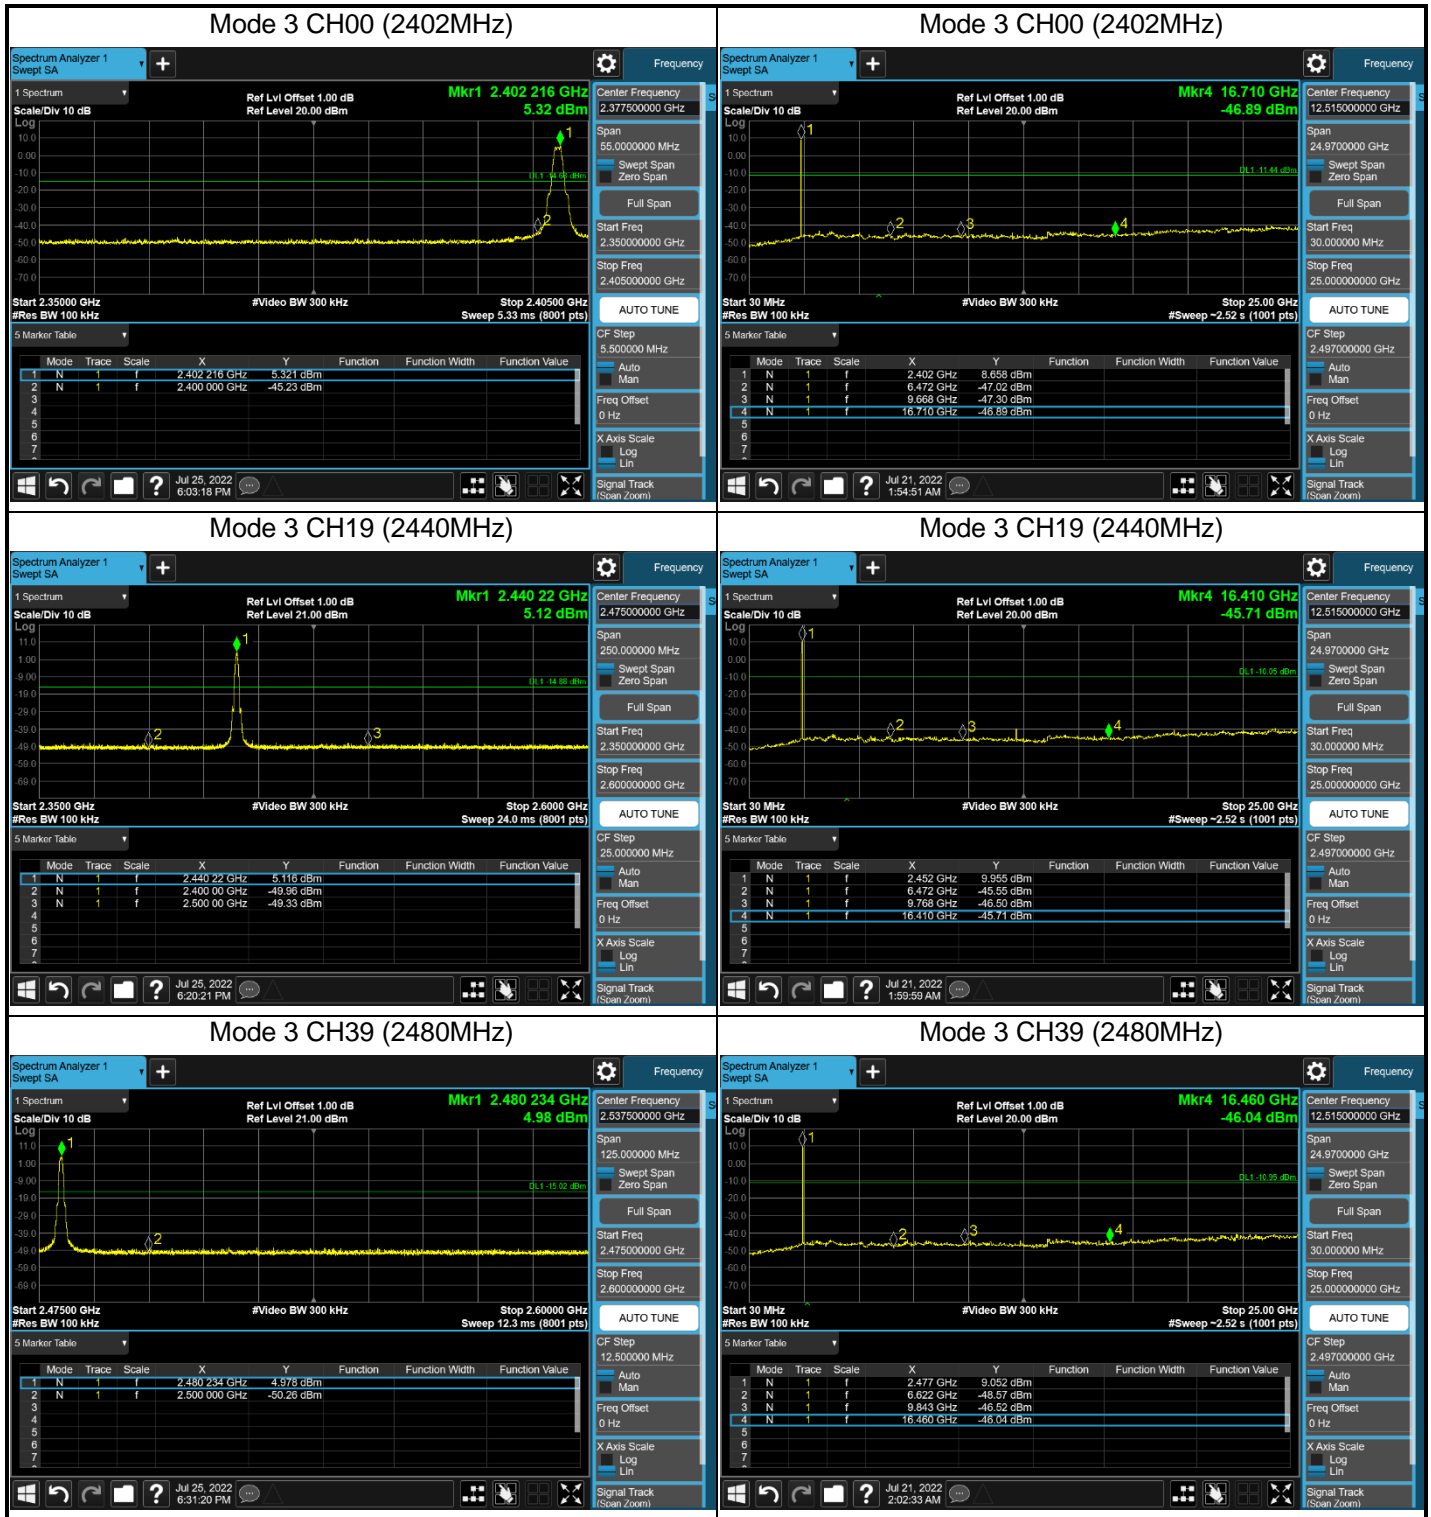


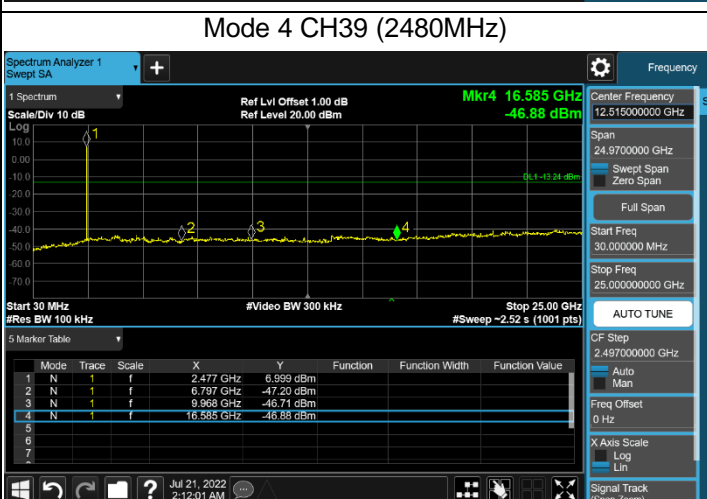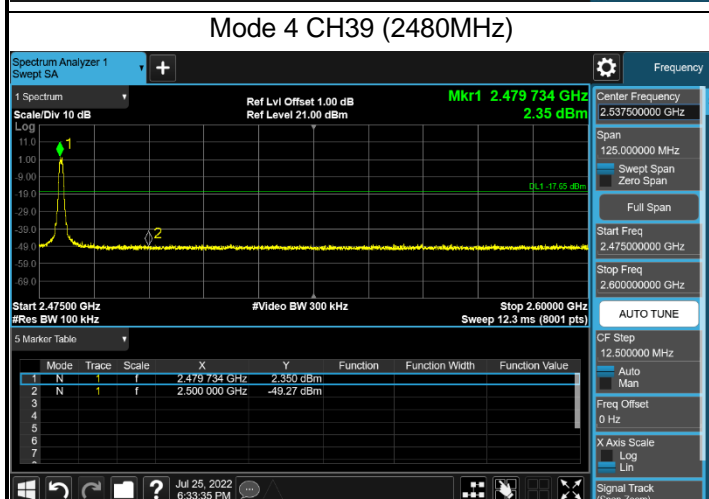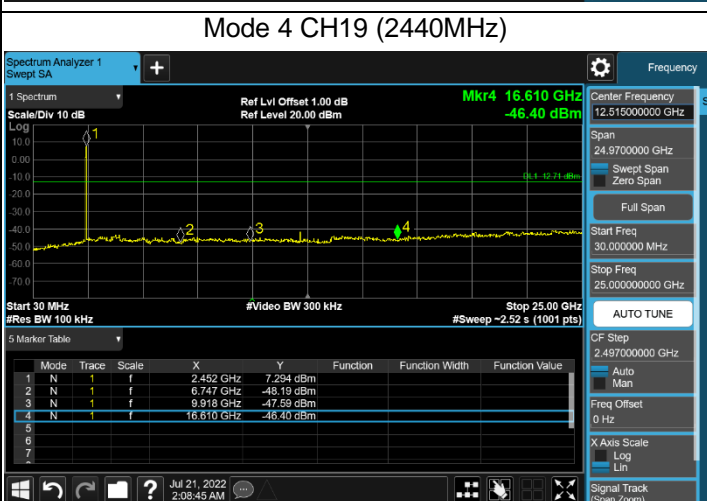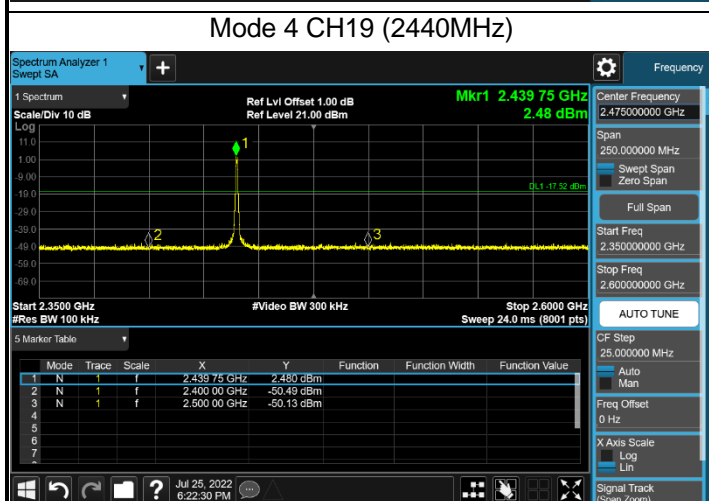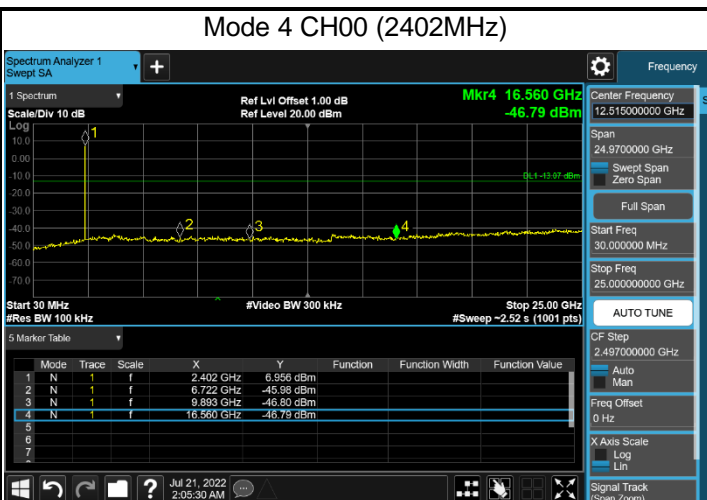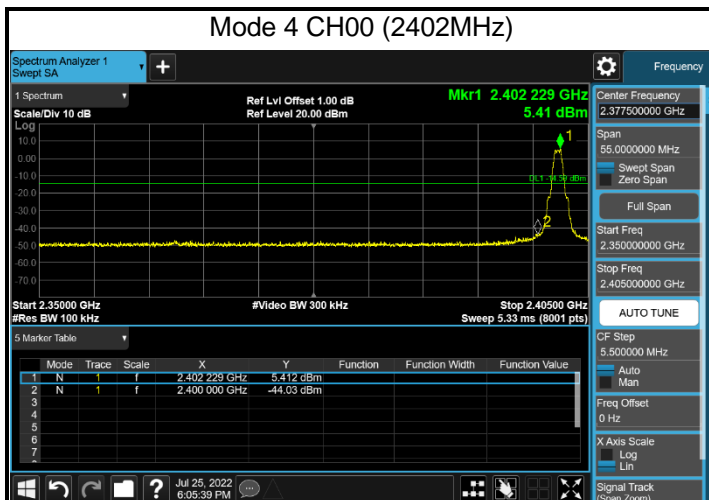

4.4 Duty cycle	VERDICT: PASS
-----------------------	----------------------

4.4.1 Limit
N/A

4.4.2 Test Setup

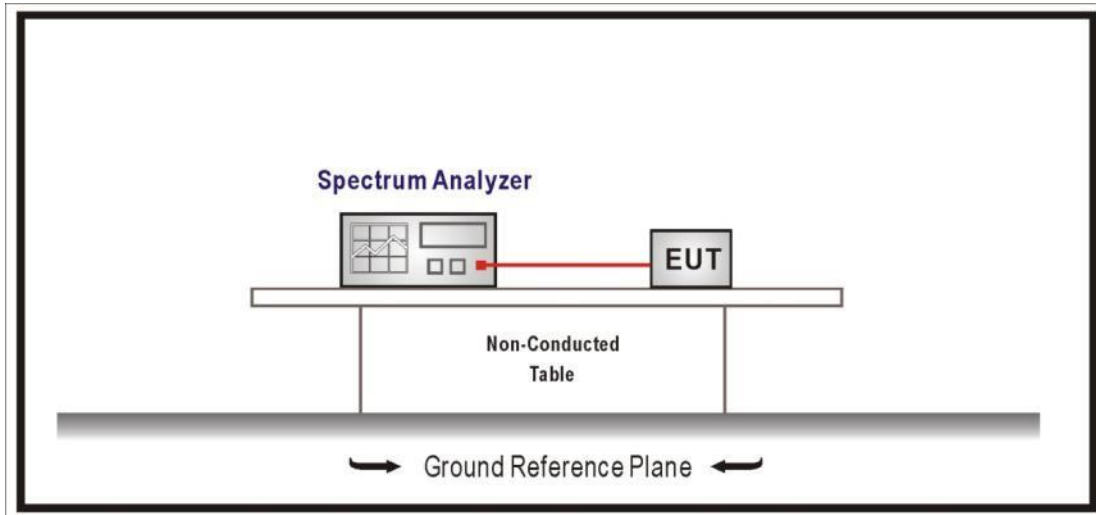

4.4.3 Test Procedure



References Rule	Chapter	Description
<input checked="" type="checkbox"/> ANSI C63.10	11.6	Duty cycle (D), transmission duration (T), and maximum power control level

4.4.4 Test Data

Test Mode	Tx On (ms)	Duty Cycle	VBW (kHz)	Detector
Mode 1	--	100%	3000	RMS
Mode 2	--	100%	3000	RMS
Mode 3	--	100%	3000	RMS
Mode 4	--	100%	3000	RMS

Note 1: T means the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control Level for the tested mode of operation.

Note 2: According to C63.10, if continuous transmission of the EUT ($D \geq 98\%$) cannot be achieved and the duty cycle is constant (duty cycle variations are less than $\pm 2\%$), for Radiated Emission Band Edge and Radiated Emission, for average detector set: $VBW \geq 3RBW$ will be used; If continuous transmission of the EUT ($D \geq 98\%$) cannot be achieved and the duty cycle is not constant (duty cycle variations exceed $\pm 2\%$), when test for Radiated Emission Band Edge and Radiated Emission, for average detector set: $VBW \geq 1/T$ will be used.

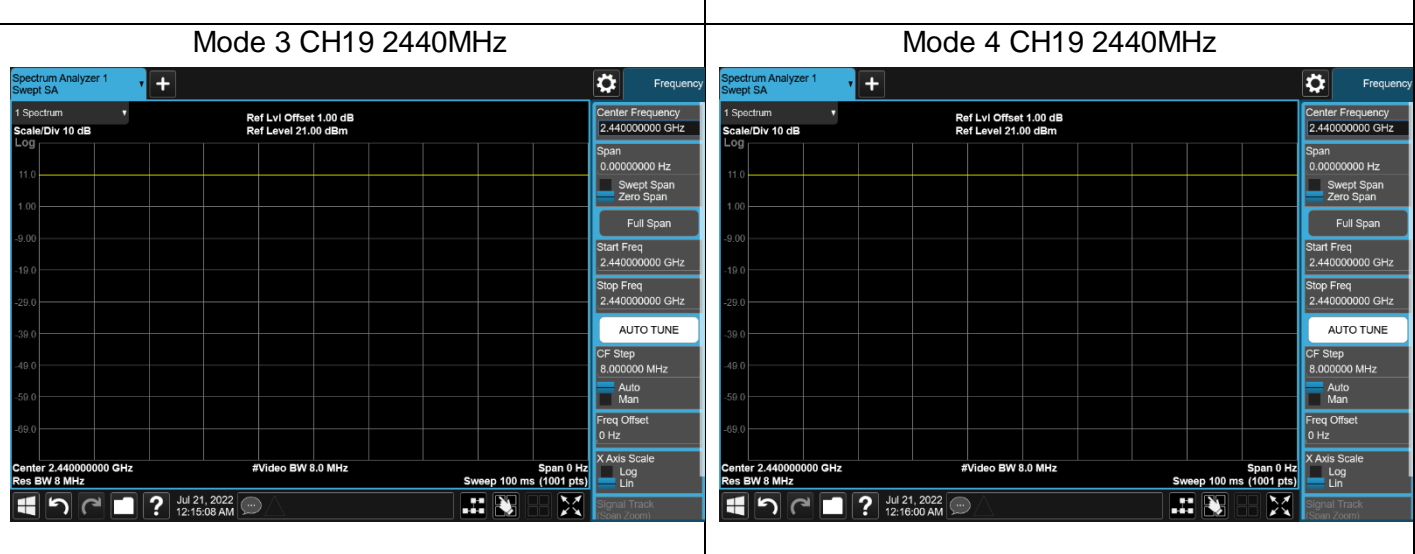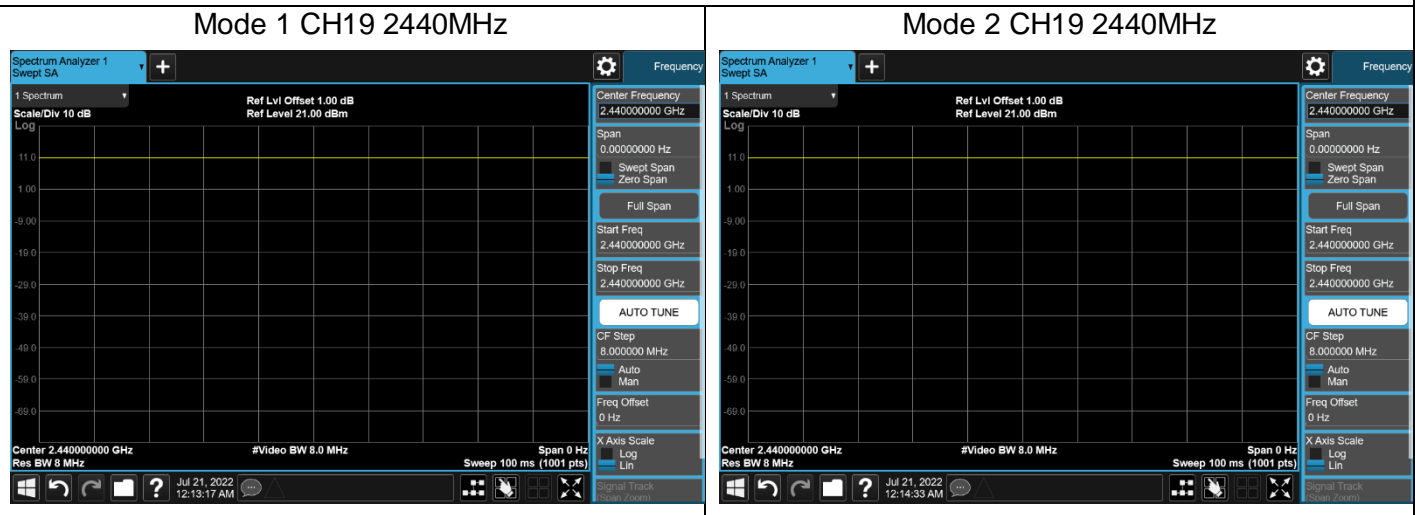

4.5 Radiated Emission Band Edge **VERDICT: PASS**


4.5.1 Limit

Standard		FCC Part 15 Subpart C Paragraph 15.247(d) , 15.209		
Frequency bands (MHz)	Detector	Limit (dBµV/m)	RBW (MHz)	Distance (m)
2310-2390	PK	74	1	3
2483.5-2500	AV	54	1	3

Note: The field strength of emissions appearing within these frequency bands shall not exceed the limits.

4.5.2 Test Setup

Above 1GHz Test Setup:

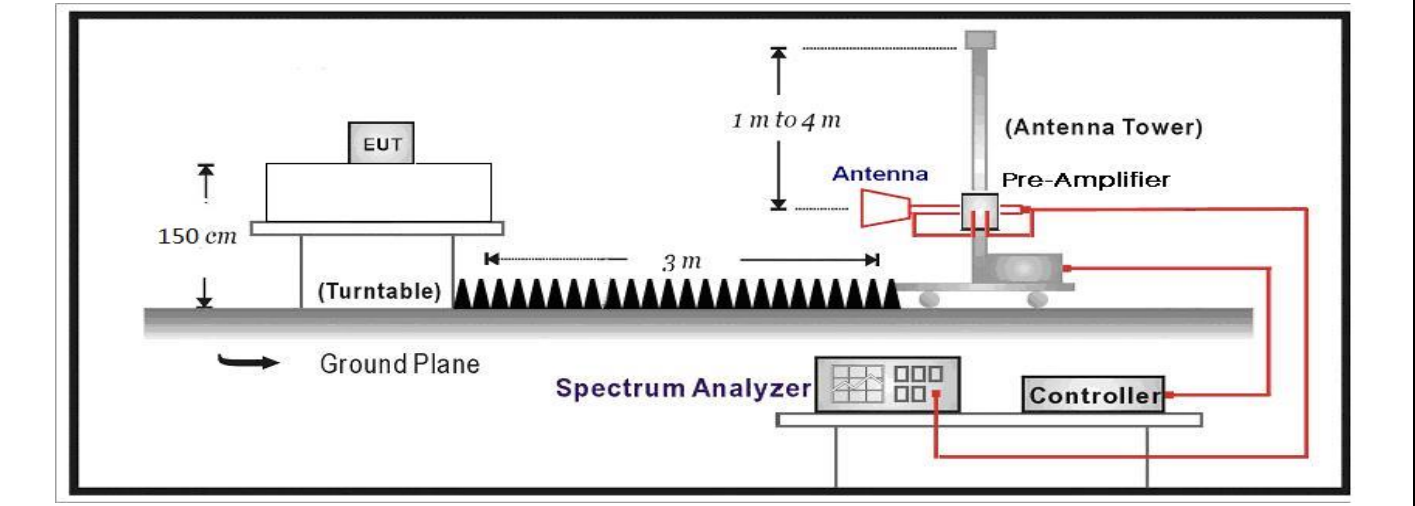


4.5.3 Test Procedure

	References Rule	Chapter	Description
<input checked="" type="checkbox"/>	ANSI C63.10	6.10	Band-edge testing
	<input checked="" type="checkbox"/> ANSI C63.10	6.10.5	Restricted-band band-edge measurements
	<input type="checkbox"/> ANSI C63.10	6.10.6	Marker-delta method
<input checked="" type="checkbox"/>	ANSI C63.10	11.12	Emissions in restricted frequency bands
	<input checked="" type="checkbox"/> ANSI C63.10	11.12.1	Radiated emission measurements
	<input checked="" type="checkbox"/> ANSI C63.10	11.12.2.7	Radiated spurious emission test
<input type="checkbox"/>	ANSI C63.10	6.4	Radiated emissions from unlicensed wireless devices below 30 MHz
<input type="checkbox"/>	ANSI C63.10	6.5	Radiated emissions from unlicensed wireless devices in the frequency range of 30 MHz to 1000 MHz
<input checked="" type="checkbox"/>	ANSI C63.10	6.6	Radiated emissions from unlicensed wireless devices above 1 GHz


4.5.4 Test Data

Profile: 2260060R	Page No.: 2
Engineer: Carlos. Shen	
Site: AC5	Time: 2021/12/14 - 23:02
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: LED Lamp	Power: AC 120V/60Hz
Note: Mode 1:Transmit at 2402MHz by LE_1Mbps	

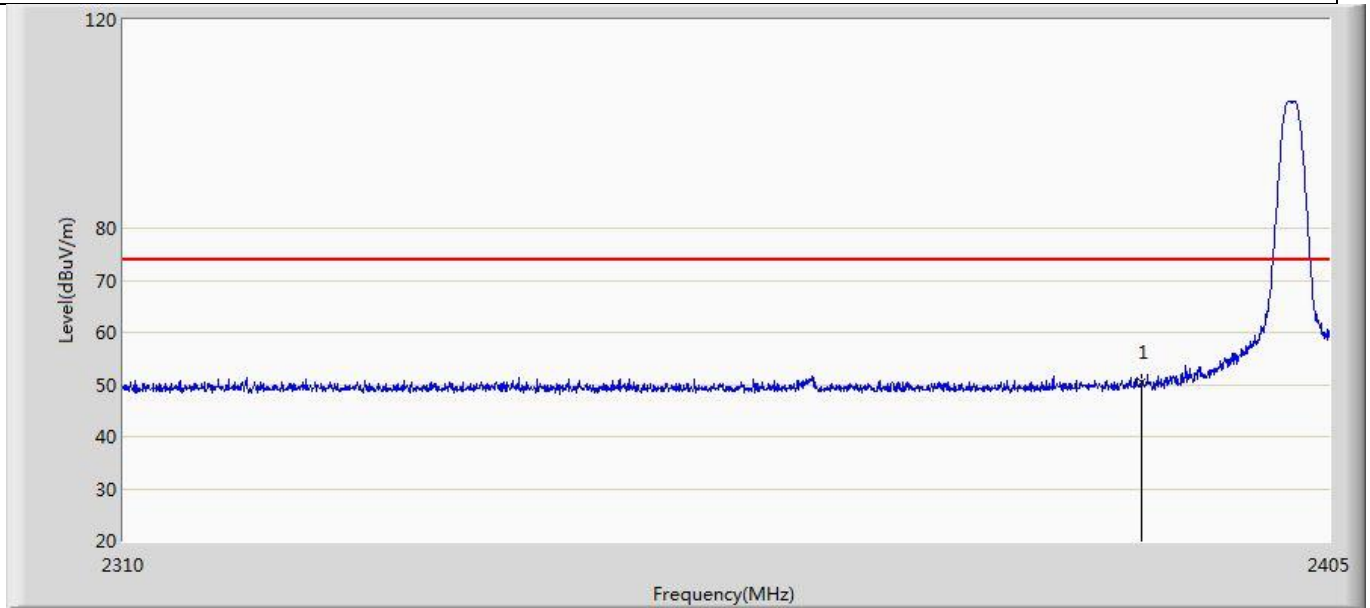


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2390.000	50.386	14.288	-23.614	74.000	36.098	PK

Profile: 2260060R	Page No.: 1
Engineer: Carlos. Shen	
Site: AC5	Time: 2021/12/14 - 22:31
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: LED Lamp	Power: AC 120V/60Hz
Note: Mode 1:Transmit at 2402MHz by LE_1Mbps	

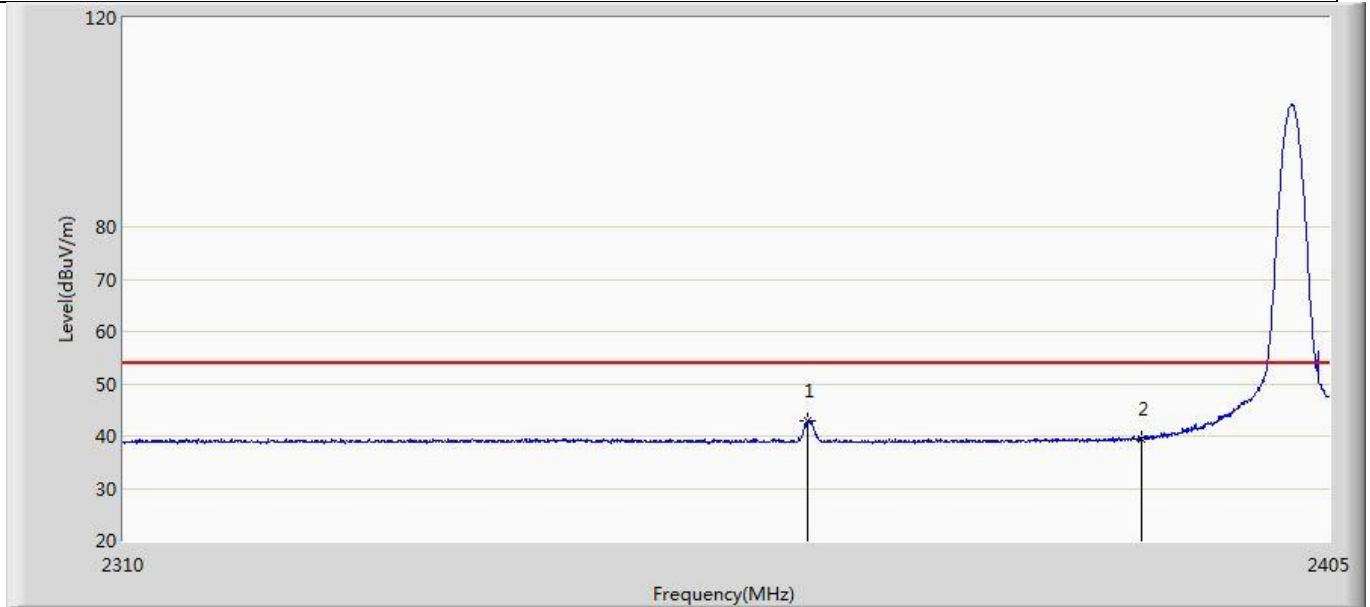


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2363.485	43.014	7.087	-10.986	54.000	35.927	AV
2		2390.000	39.429	3.331	-14.571	54.000	36.098	AV

Profile: 2260060R	Page No.: 4
Engineer: Carlos. Shen	
Site: AC5	Time: 2021/12/14 - 23:04
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: LED Lamp	Power: AC 120V/60Hz
Note: Mode 1:Transmit at 2402MHz by LE_1Mbps	

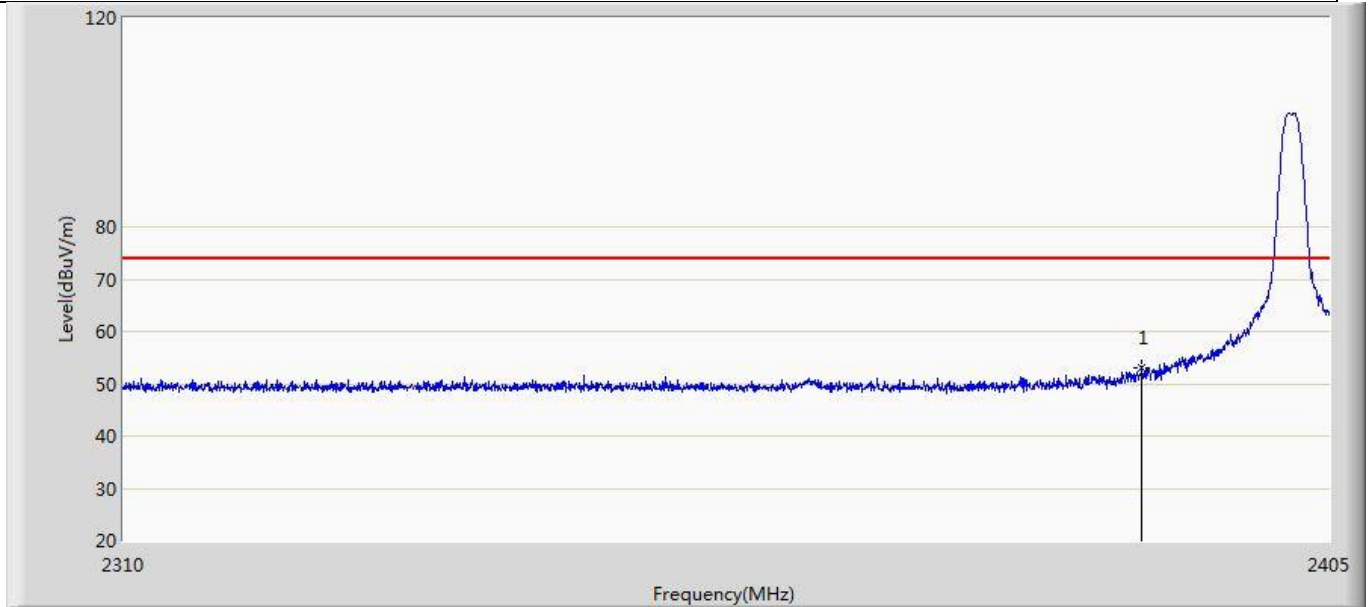


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2390.000	52.926	16.828	-21.074	74.000	36.098	PK

Profile: 2260060R	Page No.: 3
Engineer: Carlos. Shen	
Site: AC5	Time: 2021/12/14 - 23:03
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: LED Lamp	Power: AC 120V/60Hz
Note: Mode 1:Transmit at 2402MHz by LE_1Mbps	

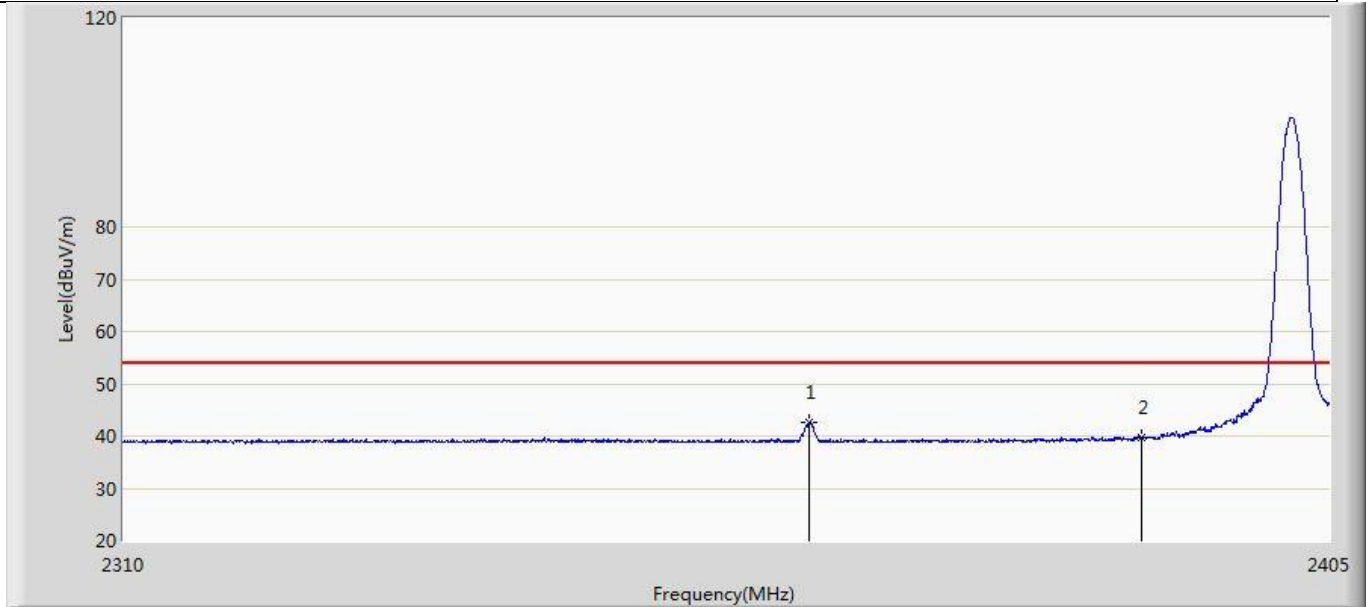


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2363.580	42.595	6.668	-11.405	54.000	35.928	AV
2		2390.000	39.802	3.704	-14.198	54.000	36.098	AV

Profile: 2260060R	Page No.: 6
Engineer: Carlos. Shen	
Site: AC5	Time: 2022/01/24 - 20:37
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: LED Lamp	Power: AC 120V/60Hz
Note: Mode 1:Transmit at 2480MHz by LE_1Mbps	

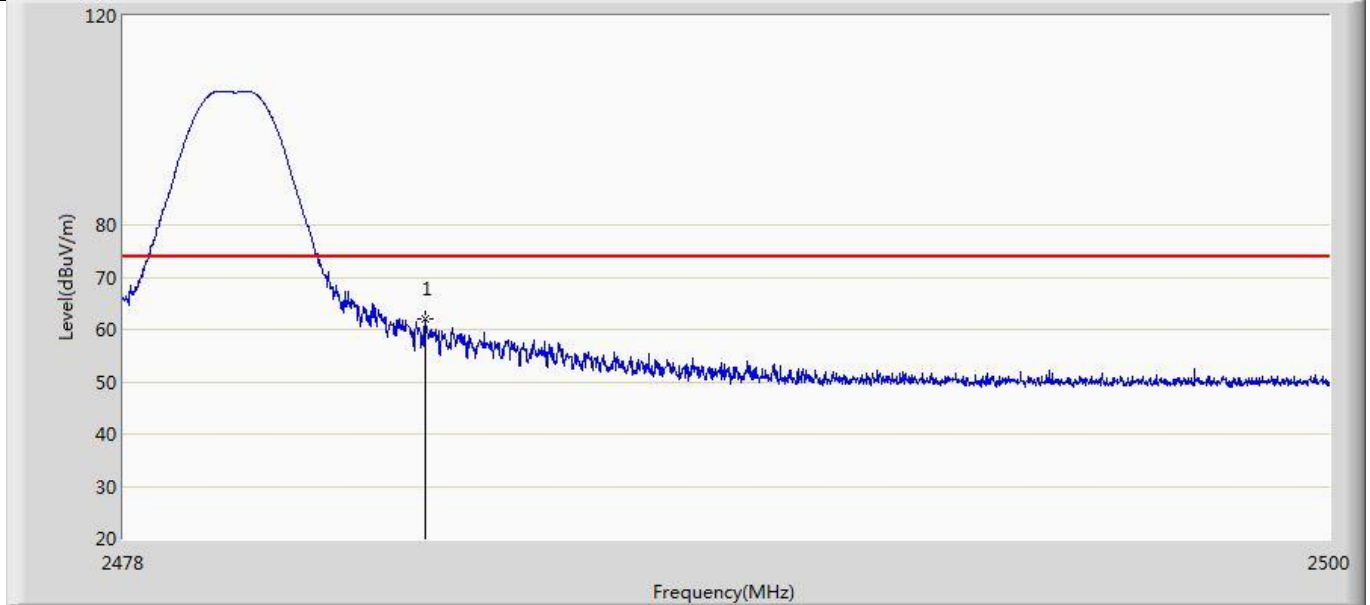


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2483.500	61.935	25.714	-12.065	74.000	36.220	PK

Profile: 2260060R	Page No.: 5
Engineer: Carlos. Shen	
Site: AC5	Time: 2022/01/24 - 20:34
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: LED Lamp	Power: AC 120V/60Hz
Note: Mode 1:Transmit at 2480MHz by LE_1Mbps	

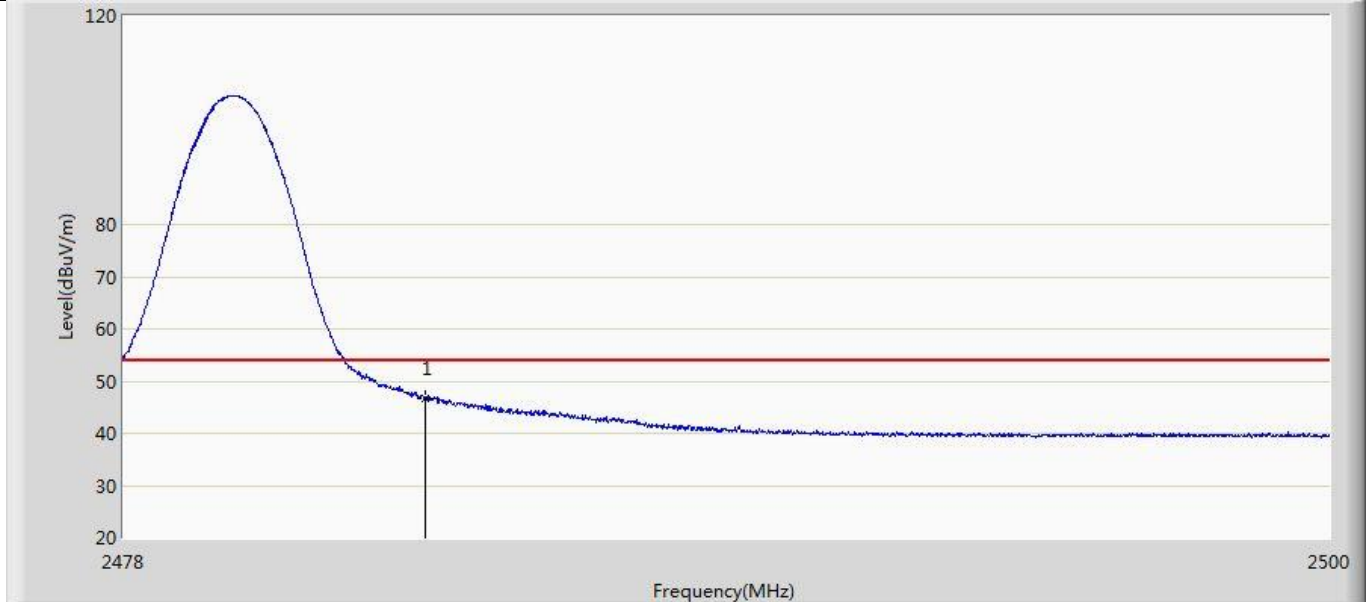


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2483.500	46.681	10.460	-7.319	54.000	36.220	AV

Profile: 2260060R	Page No.: 8
Engineer: Carlos. Shen	
Site: AC5	Time: 2022/01/24 - 20:39
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: LED Lamp	Power: AC 120V/60Hz
Note: Mode 1:Transmit at 2480MHz by LE_1Mbps	

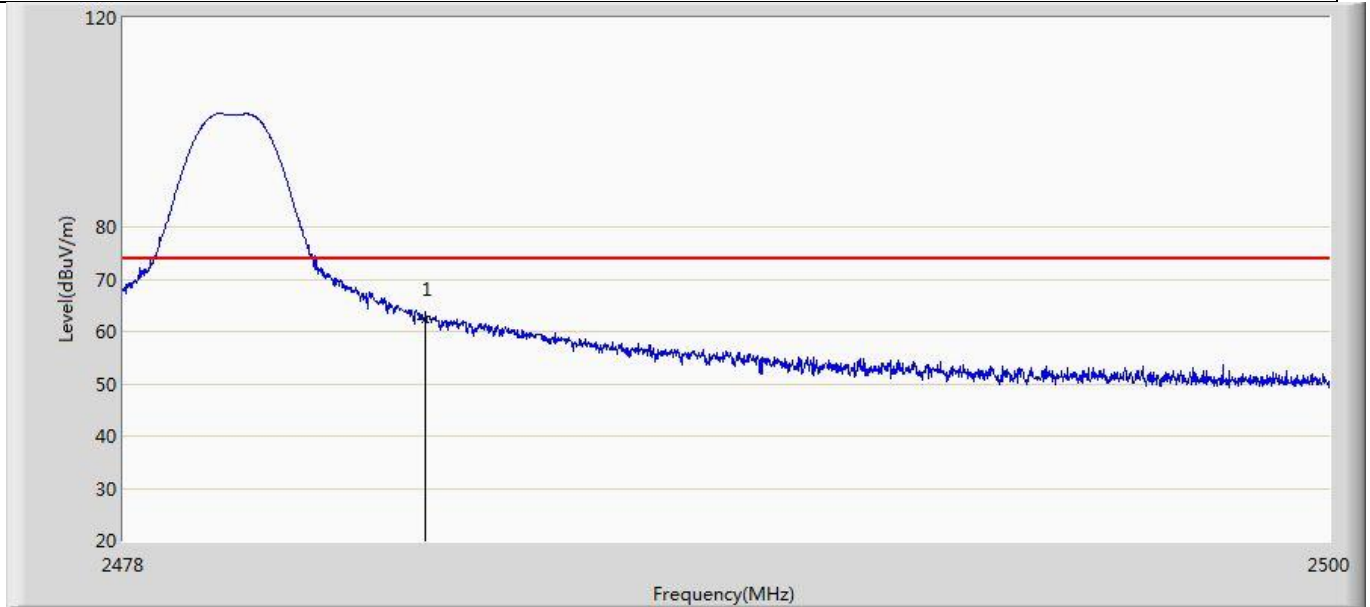


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2483.500	62.395	26.174	-11.605	74.000	36.220	PK

Profile: 2260060R	Page No.: 7
Engineer: Carlos. Shen	
Site: AC5	Time: 2022/01/24 - 20:38
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: LED Lamp	Power: AC 120V/60Hz
Note: Mode 1:Transmit at 2480MHz by LE_1Mbps	

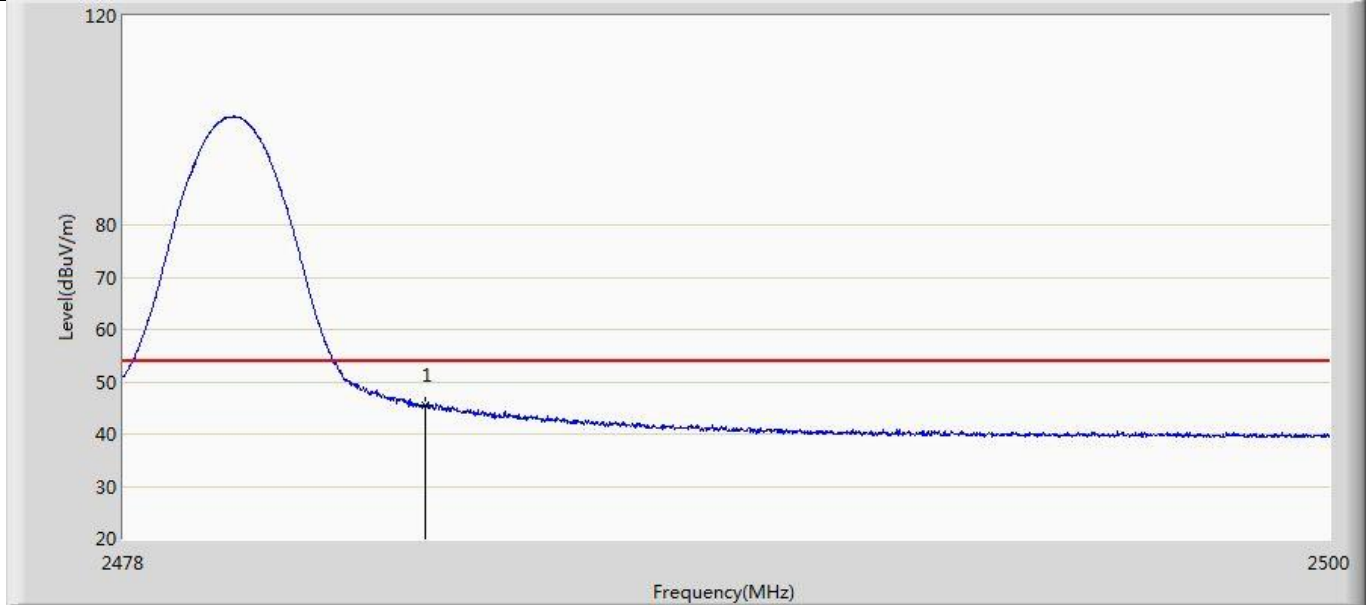


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2483.500	45.566	9.345	-8.434	54.000	36.220	AV

Profile: 2260060R	Page No.: 10
Engineer: Carlos. Shen	
Site: AC5	Time: 2022/05/07 - 21:09
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: LED Lamp	Power: AC 120V/60Hz
Note: Mode 2:Transmit at 2402MHz by LE_2Mbps	

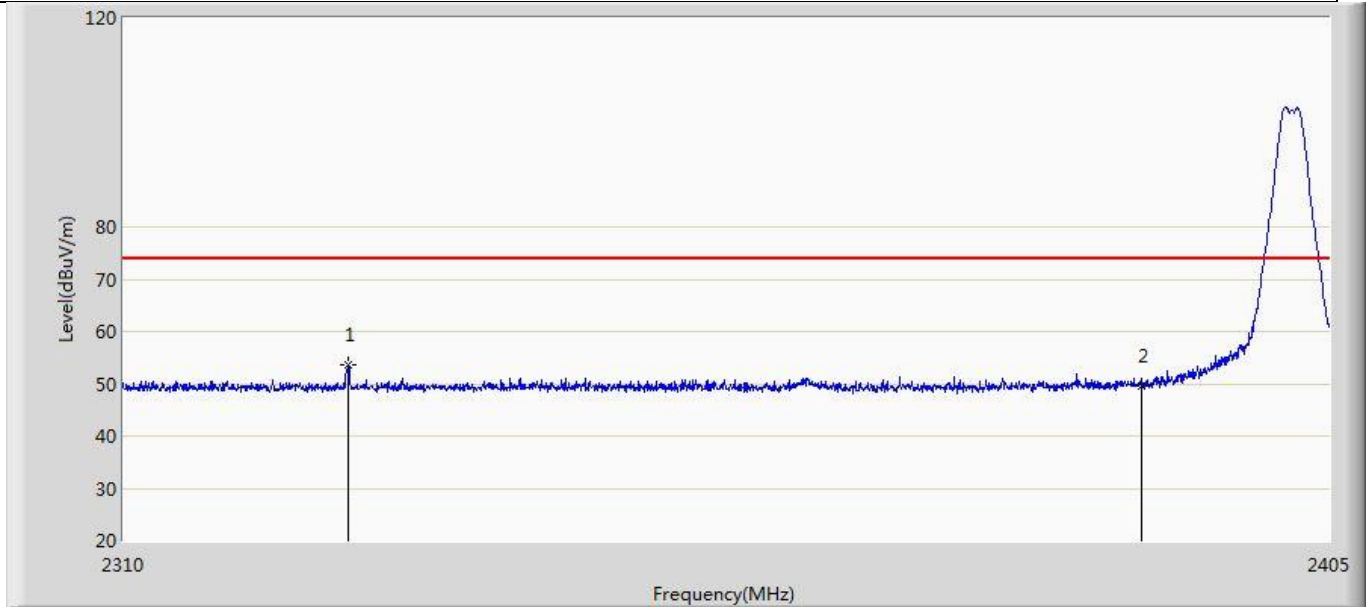


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2327.480	53.752	17.836	-20.248	74.000	35.915	PK
2		2390.000	49.473	13.375	-24.527	74.000	36.098	PK

Profile: 2260060R	Page No.: 9
Engineer: Carlos. Shen	
Site: AC5	Time: 2022/05/07 - 21:09
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: LED Lamp	Power: AC 120V/60Hz
Note: Mode 2:Transmit at 2402MHz by LE_2Mbps	

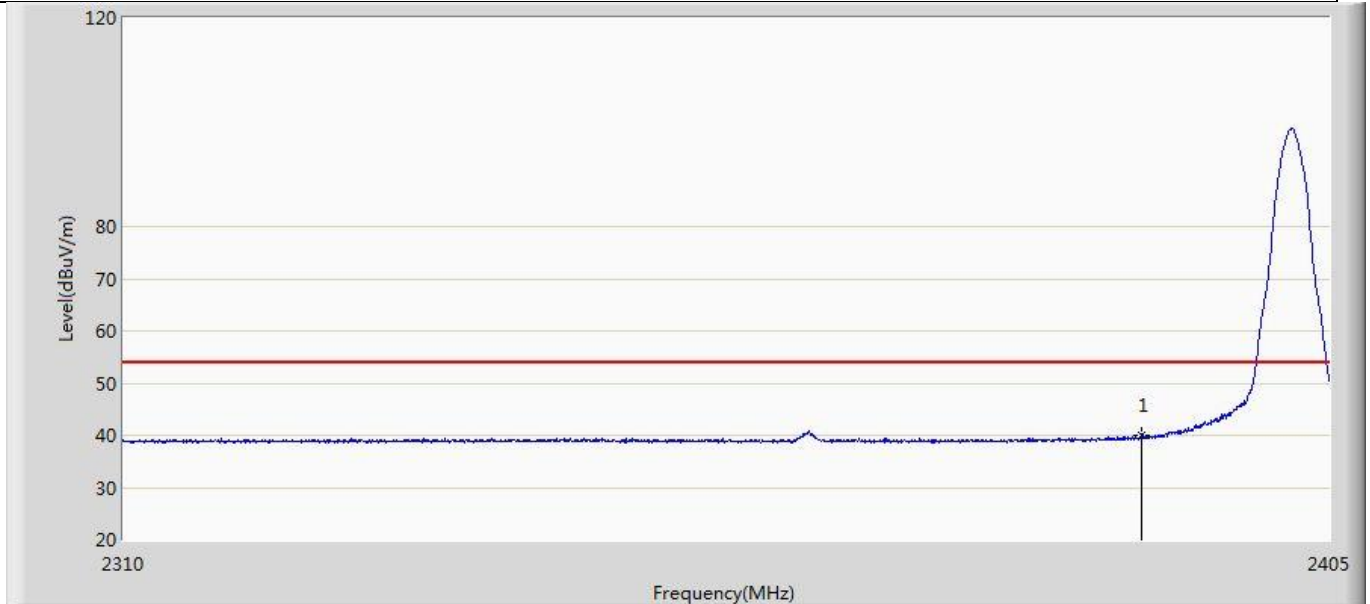


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2390.000	39.888	3.790	-14.112	54.000	36.098	AV

Profile: 2260060R	Page No.: 12
Engineer: Carlos. Shen	
Site: AC5	Time: 2022/05/07 - 21:09
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: LED Lamp	Power: AC 120V/60Hz
Note: Mode 2:Transmit at 2402MHz by LE_2Mbps	

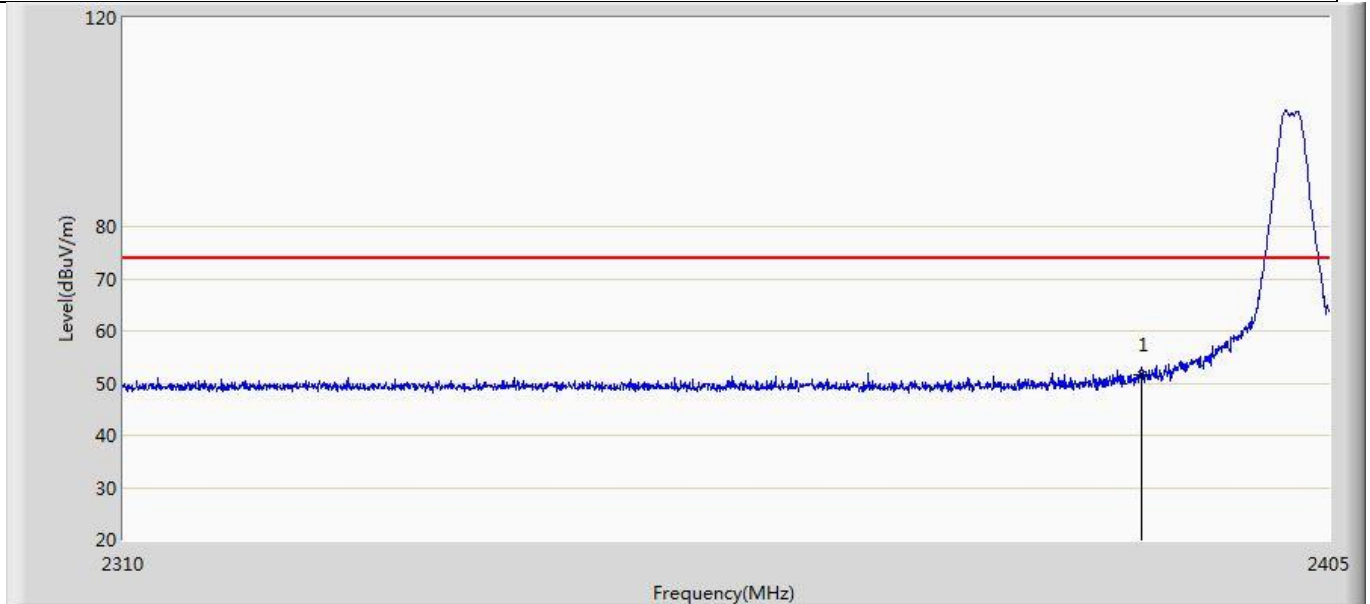


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2390.000	51.729	15.631	-22.271	74.000	36.098	PK

Profile: 2260060R	Page No.: 11
Engineer: Carlos. Shen	
Site: AC5	Time: 2022/05/07 - 21:09
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: LED Lamp	Power: AC 120V/60Hz
Note: Mode 2:Transmit at 2402MHz by LE_2Mbps	

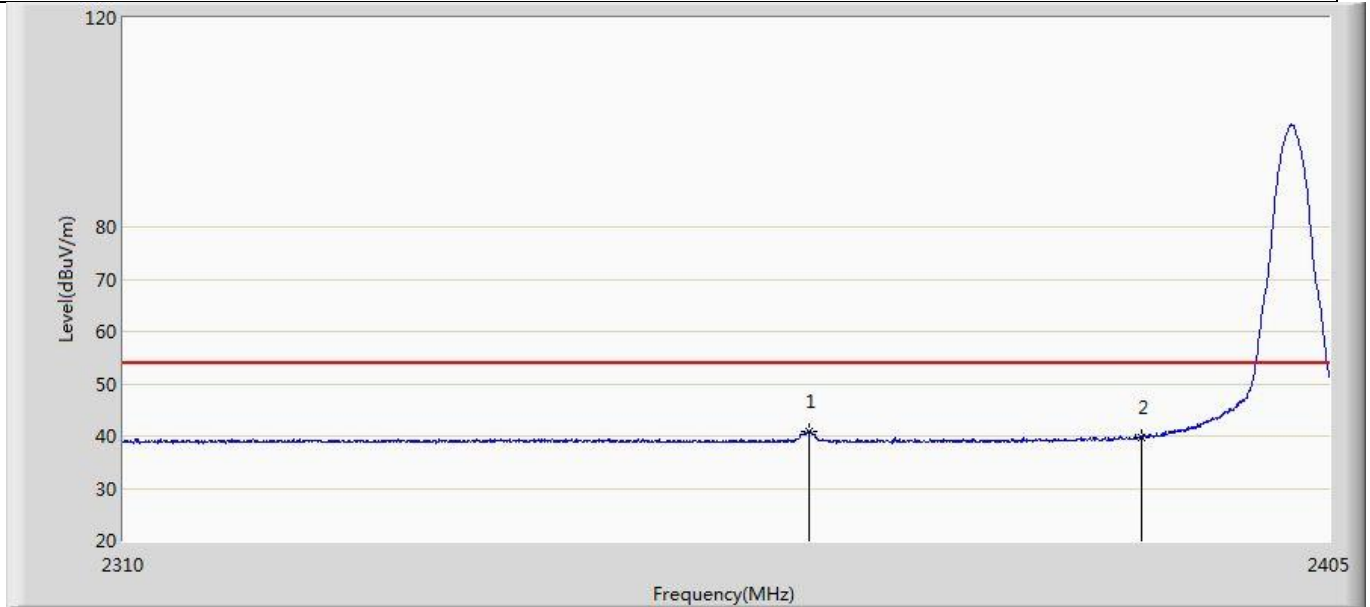


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2363.627	41.001	5.074	-12.999	54.000	35.928	AV
2		2390.000	39.722	3.624	-14.278	54.000	36.098	AV

Profile: 2260060R	Page No.: 14
Engineer: Carlos. Shen	
Site: AC5	Time: 2022/05/07 - 21:10
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: LED Lamp	Power: AC 120V/60Hz
Note: Mode 2:Transmit at 2480MHz by LE_2Mbps	

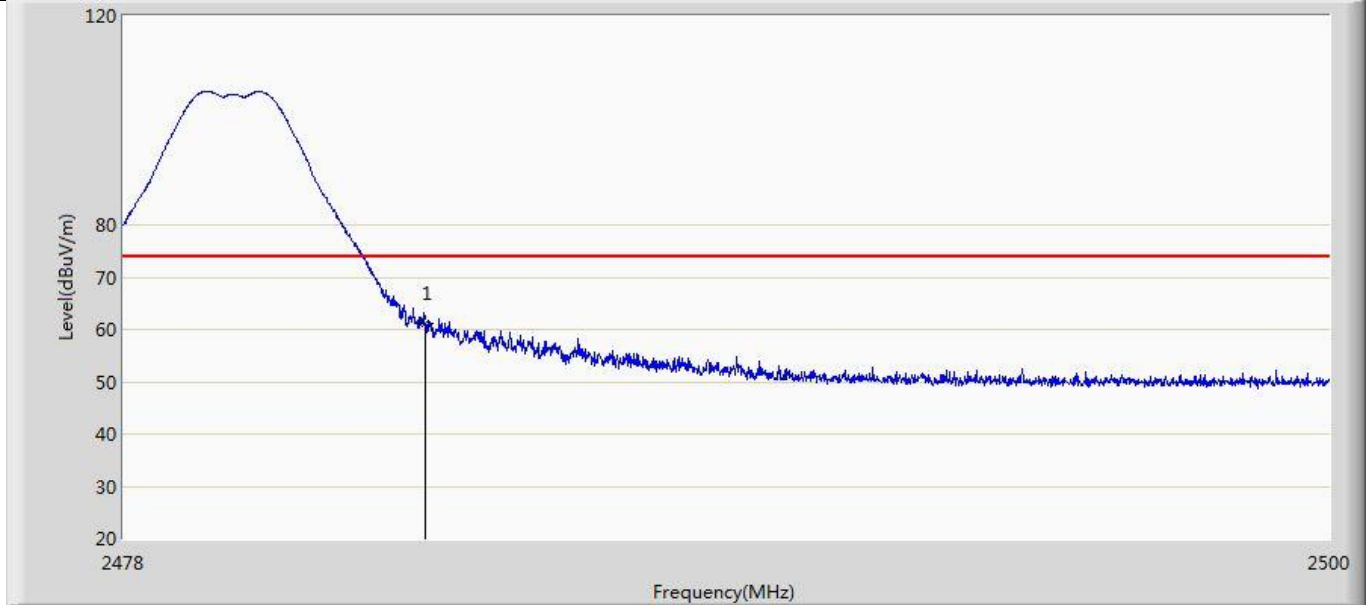


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2483.500	61.164	24.943	-12.836	74.000	36.220	PK

Profile: 2260060R	Page No.: 13
Engineer: Carlos. Shen	
Site: AC5	Time: 2022/05/07 - 21:10
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: LED Lamp	Power: AC 120V/60Hz
Note: Mode 2:Transmit at 2480MHz by LE_2Mbps	

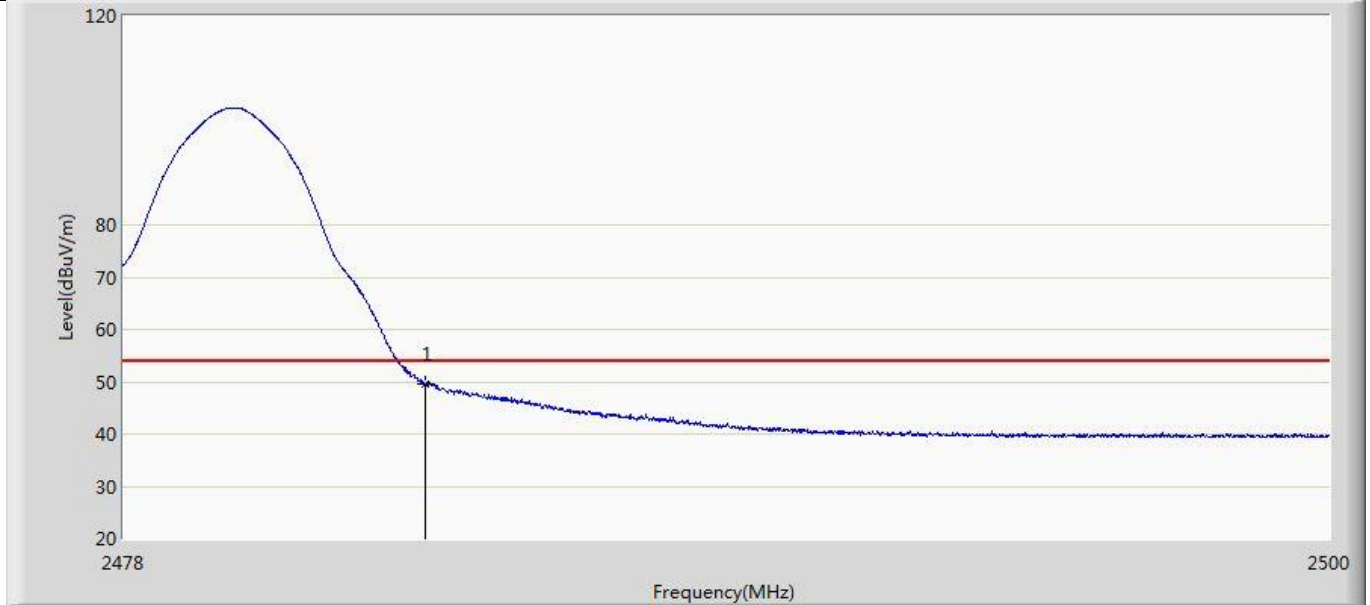


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2483.500	49.709	13.488	-4.291	54.000	36.220	AV

Profile: 2260060R	Page No.: 16
Engineer: Carlos. Shen	
Site: AC5	Time: 2022/05/07 - 21:10
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: LED Lamp	Power: AC 120V/60Hz
Note: Mode 2:Transmit at 2480MHz by LE_2Mbps	

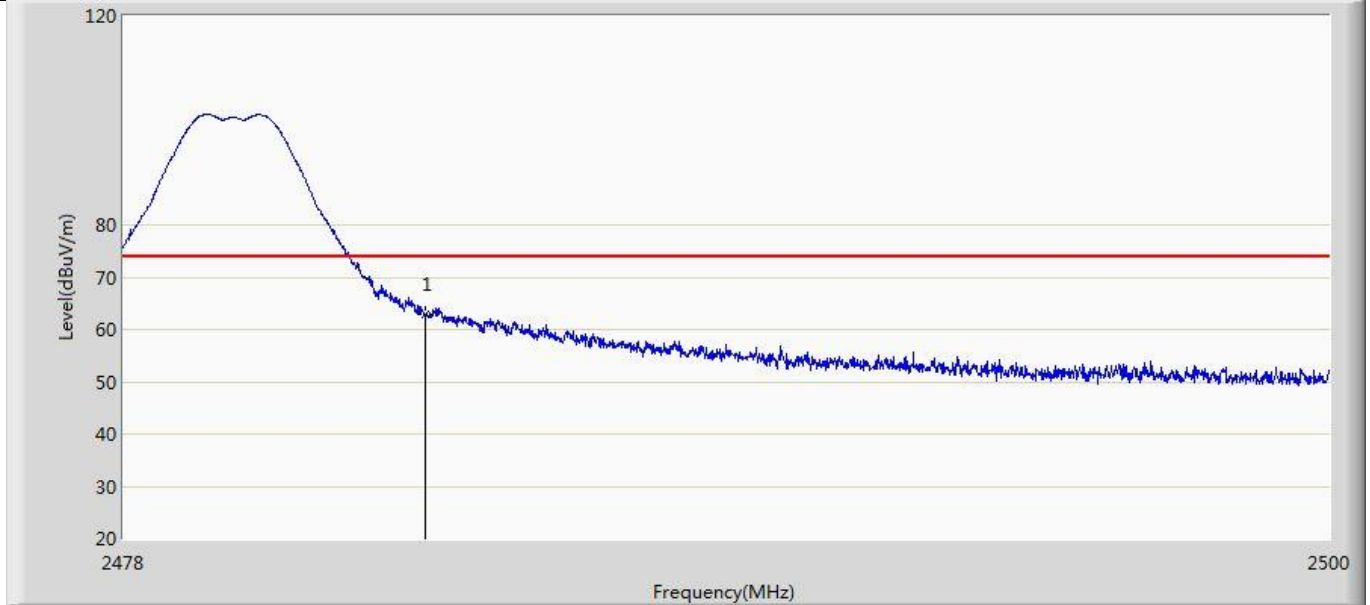


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2483.500	62.779	26.558	-11.221	74.000	36.220	PK

Profile: 2260060R	Page No.: 15
Engineer: Carlos. Shen	
Site: AC5	Time: 2022/05/07 - 21:10
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: LED Lamp	Power: AC 120V/60Hz
Note: Mode 2:Transmit at 2480MHz by LE_2Mbps	

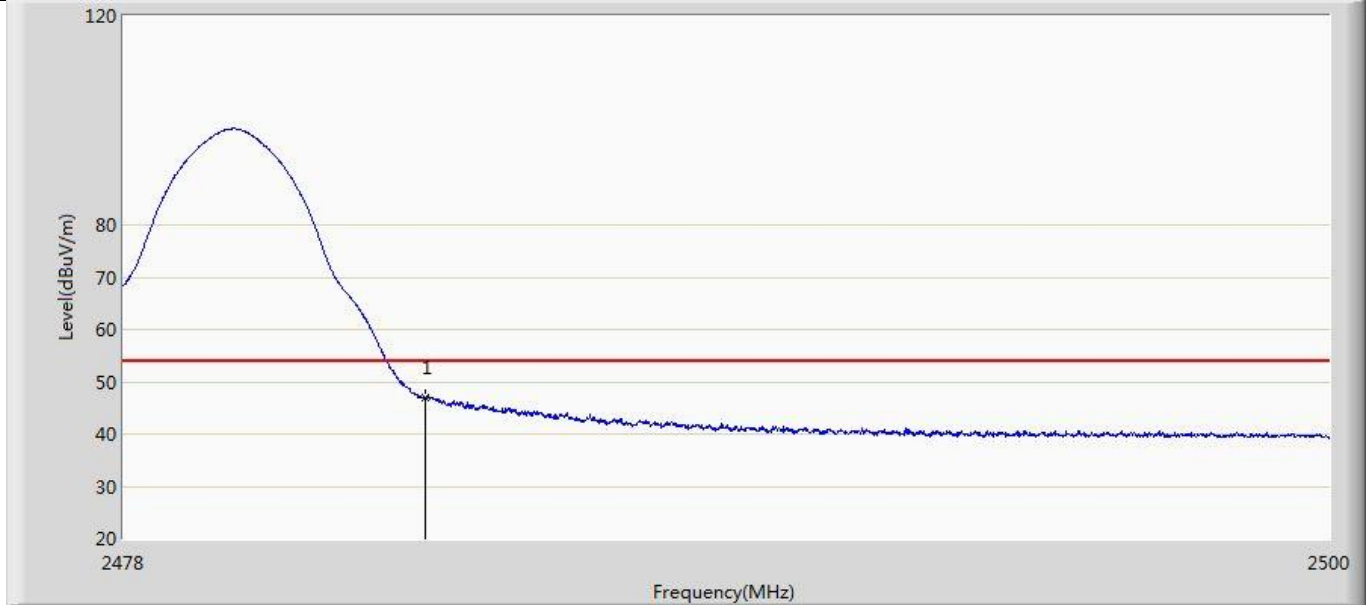


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2483.500	47.031	10.810	-6.969	54.000	36.220	AV

Profile: 2260060R	Page No.: 26
Engineer: Carlos. Shen	
Site: AC5	Time: 2022/07/05 - 22:10
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: LED Lamp	Power: AC 120V/60Hz
Note: Mode 3:Transmit at 2402MHz by LE_Coded S=2	

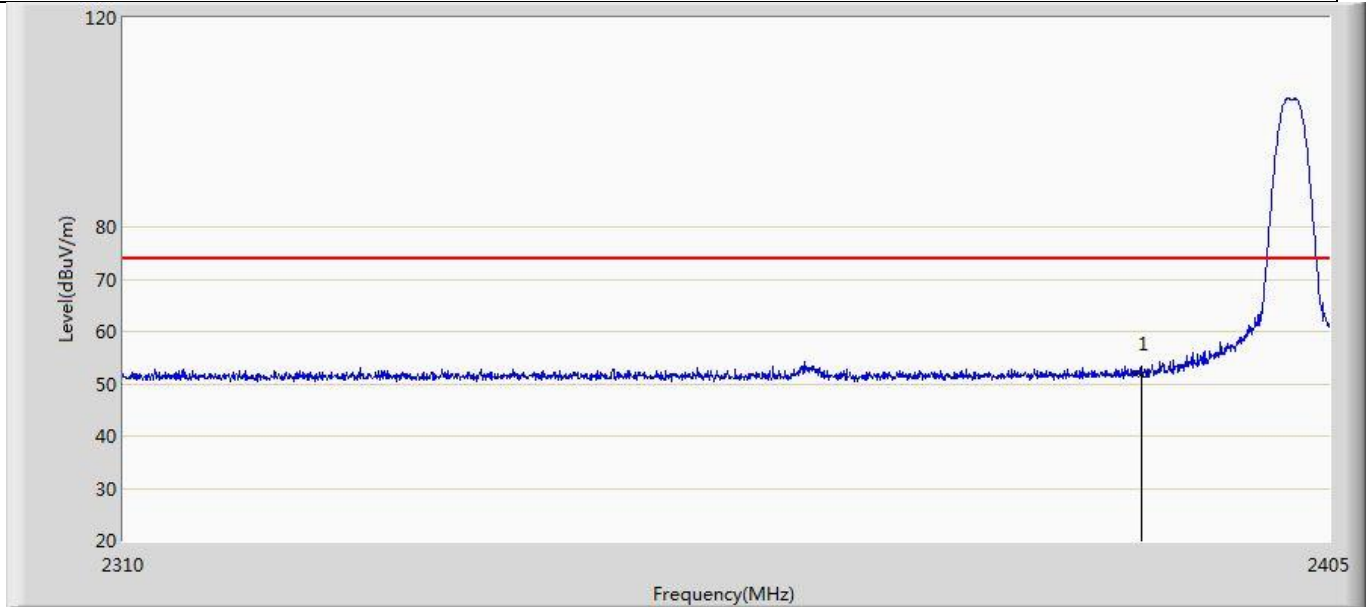


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2390.000	51.912	15.814	-22.088	74.000	36.098	PK

Profile: 2260060R	Page No.: 25
Engineer: Carlos. Shen	
Site: AC5	Time: 2022/07/05 - 22:10
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: LED Lamp	Power: AC 120V/60Hz
Note: Mode 3:Transmit at 2402MHz by LE_Coded S=2	

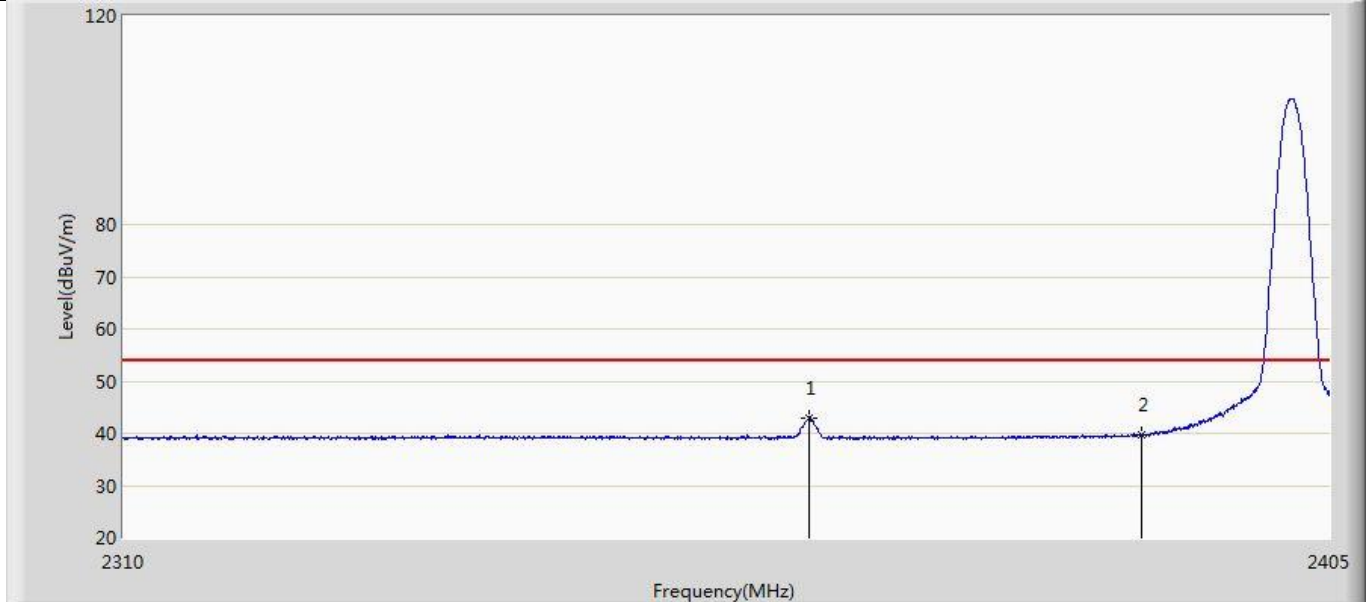


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2363.532	42.847	6.920	-11.153	54.000	35.927	AV
2		2390.000	39.767	3.669	-14.233	54.000	36.098	AV

Profile: 2260060R	Page No.: 28
Engineer: Carlos. Shen	
Site: AC5	Time: 2022/07/05 - 22:11
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: LED Lamp	Power: AC 120V/60Hz
Note: Mode 3:Transmit at 2402MHz by LE_Coded S=2	

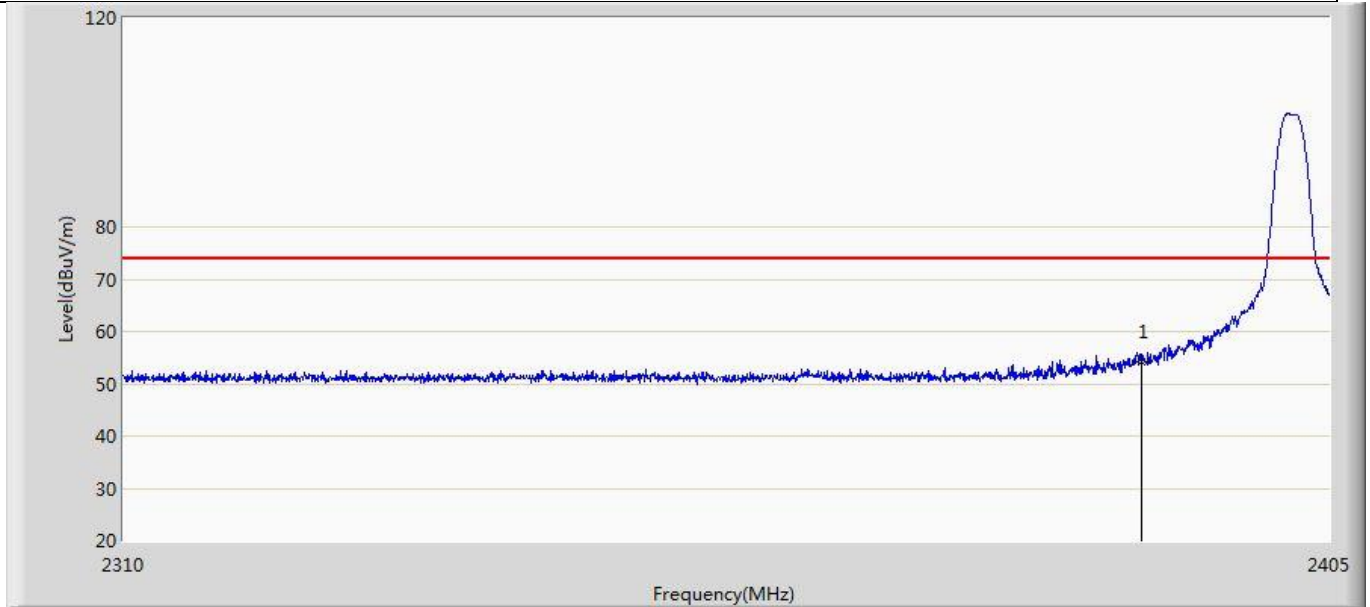


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2390.000	54.244	18.146	-19.756	74.000	36.098	PK

Profile: 2260060R	Page No.: 27
Engineer: Carlos. Shen	
Site: AC5	Time: 2022/07/05 - 22:10
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: LED Lamp	Power: AC 120V/60Hz
Note: Mode 3:Transmit at 2402MHz by LE_Coded S=2	

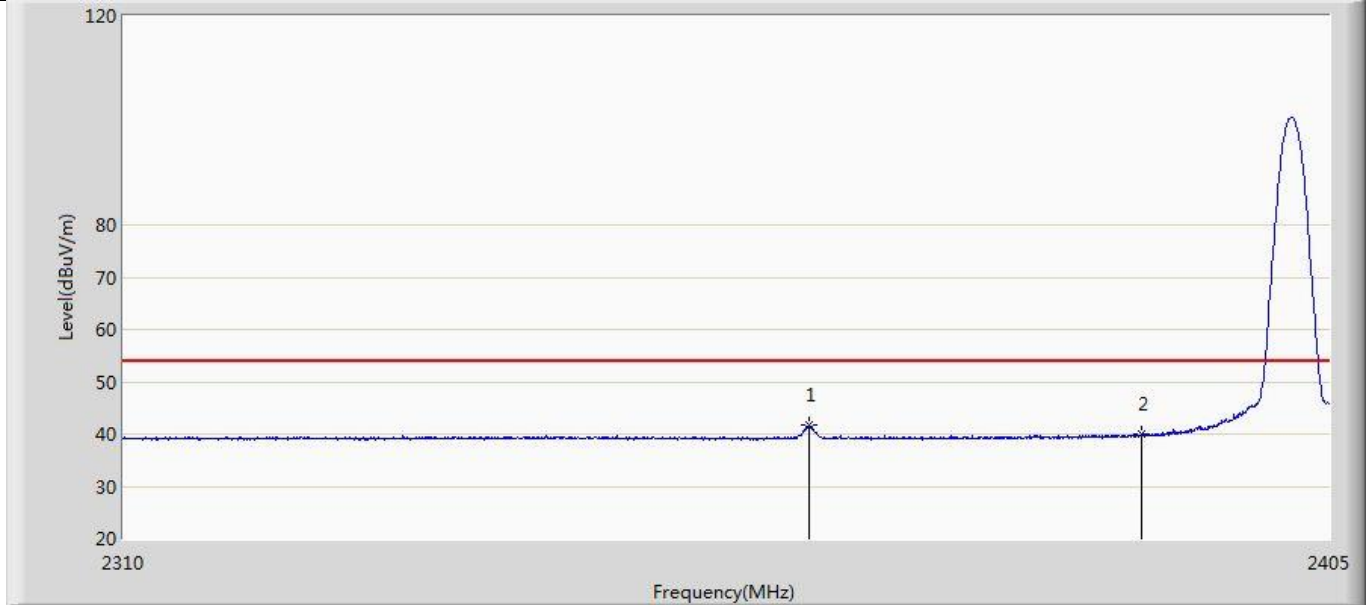


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2363.580	41.713	5.786	-12.287	54.000	35.928	AV
2		2390.000	40.015	3.917	-13.985	54.000	36.098	AV

Profile: 2260060R	Page No.: 30
Engineer: Carlos. Shen	
Site: AC5	Time: 2022/07/05 - 22:16
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: LED Lamp	Power: AC 120V/60Hz
Note: Mode 3:Transmit at 2480MHz by LE_Coded S=2	

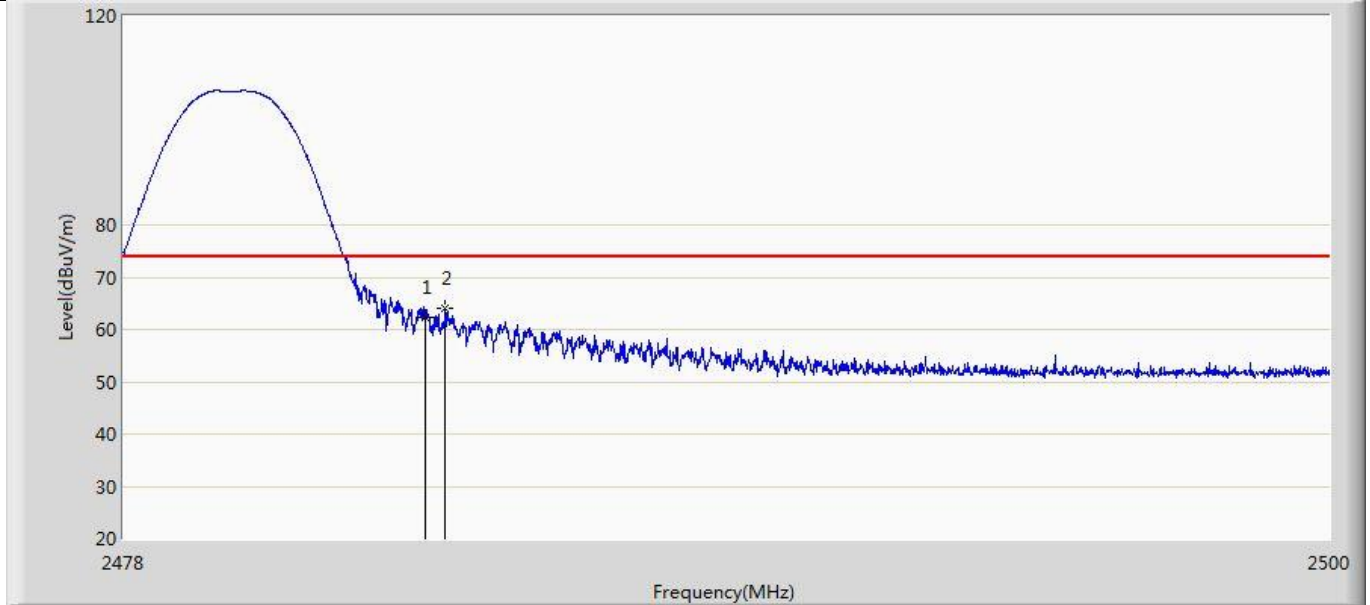


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		2483.500	62.327	26.106	-11.673	74.000	36.220	PK
2	*	2483.852	64.049	27.827	-9.951	74.000	36.222	PK

Profile: 2260060R	Page No.: 29
Engineer: Carlos. Shen	
Site: AC5	Time: 2022/07/05 - 22:16
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: LED Lamp	Power: AC 120V/60Hz
Note: Mode 3:Transmit at 2480MHz by LE_Coded S=2	

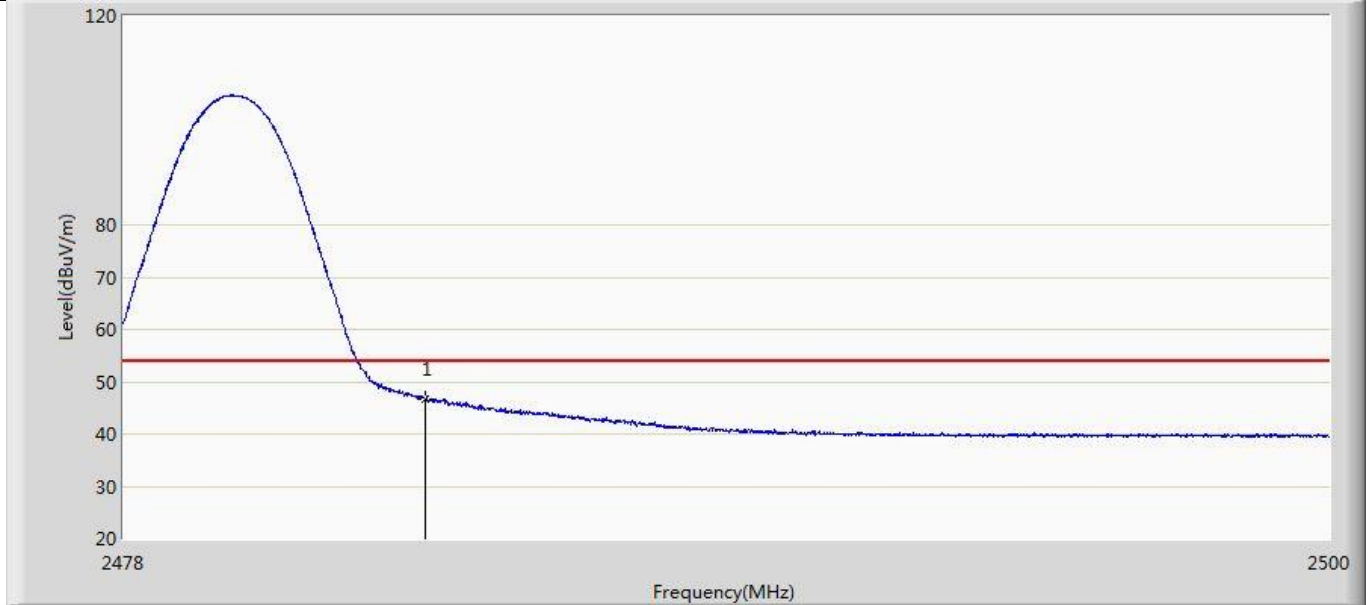


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2483.500	46.532	10.311	-7.468	54.000	36.220	AV

Profile: 2260060R	Page No.: 32
Engineer: Carlos. Shen	
Site: AC5	Time: 2022/07/05 - 22:16
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: LED Lamp	Power: AC 120V/60Hz
Note: Mode 3:Transmit at 2480MHz by LE_Coded S=2	

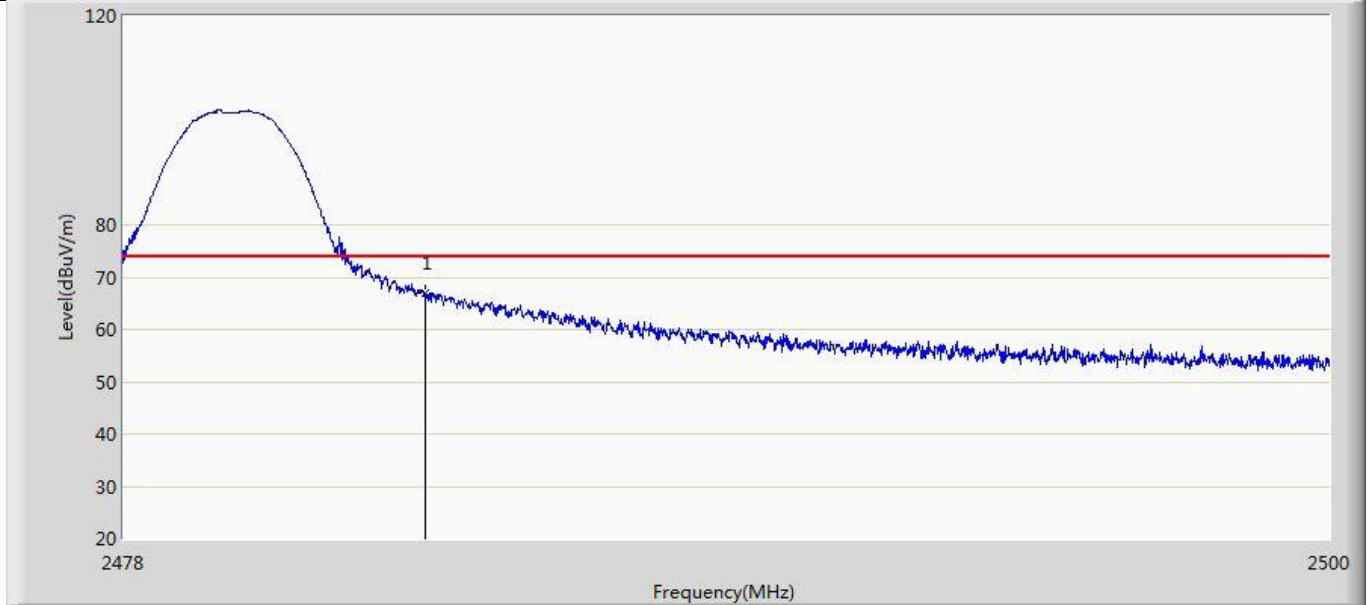


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2483.500	66.942	30.721	-7.058	74.000	36.220	PK

Profile: 2260060R	Page No.: 31
Engineer: Carlos. Shen	
Site: AC5	Time: 2022/07/05 - 22:16
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: LED Lamp	Power: AC 120V/60Hz
Note: Mode 3:Transmit at 2480MHz by LE_Coded S=2	

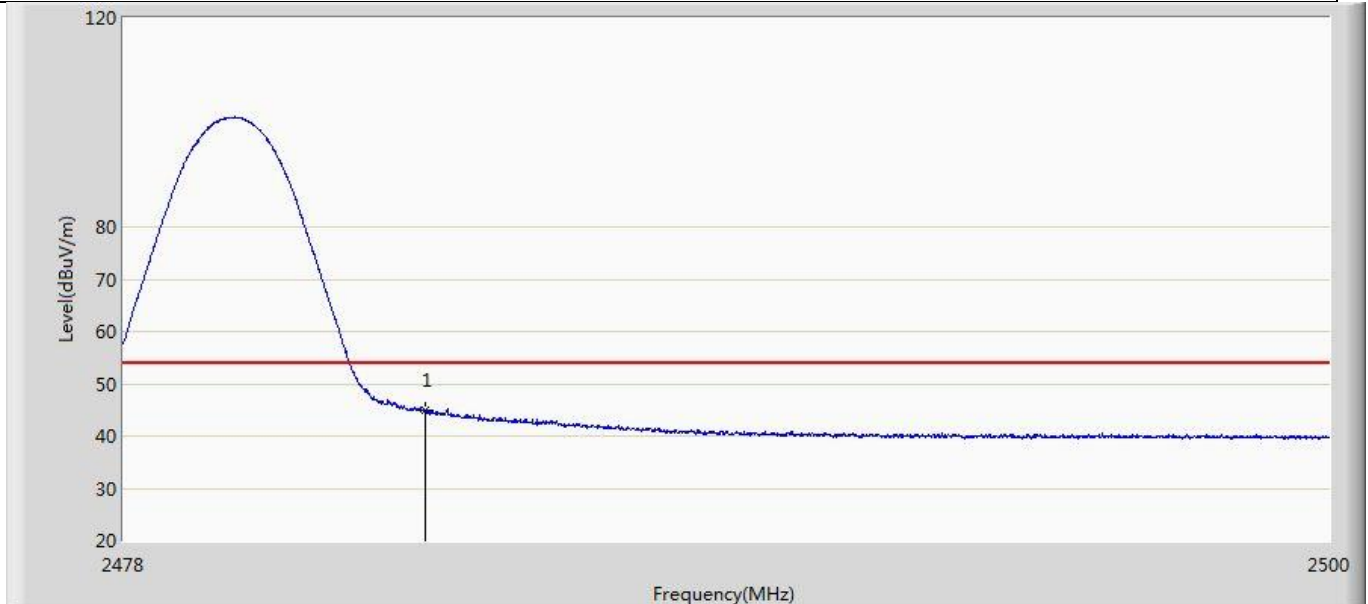


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2483.500	44.958	8.737	-9.042	54.000	36.220	AV

Profile: 2260060R	Page No.: 18
Engineer: Carlos. Shen	
Site: AC5	Time: 2022/07/05 - 21:26
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: LED Lamp	Power: AC 120V/60Hz
Note: Mode 4:Transmit at 2402MHz by LE_Coded S=8	

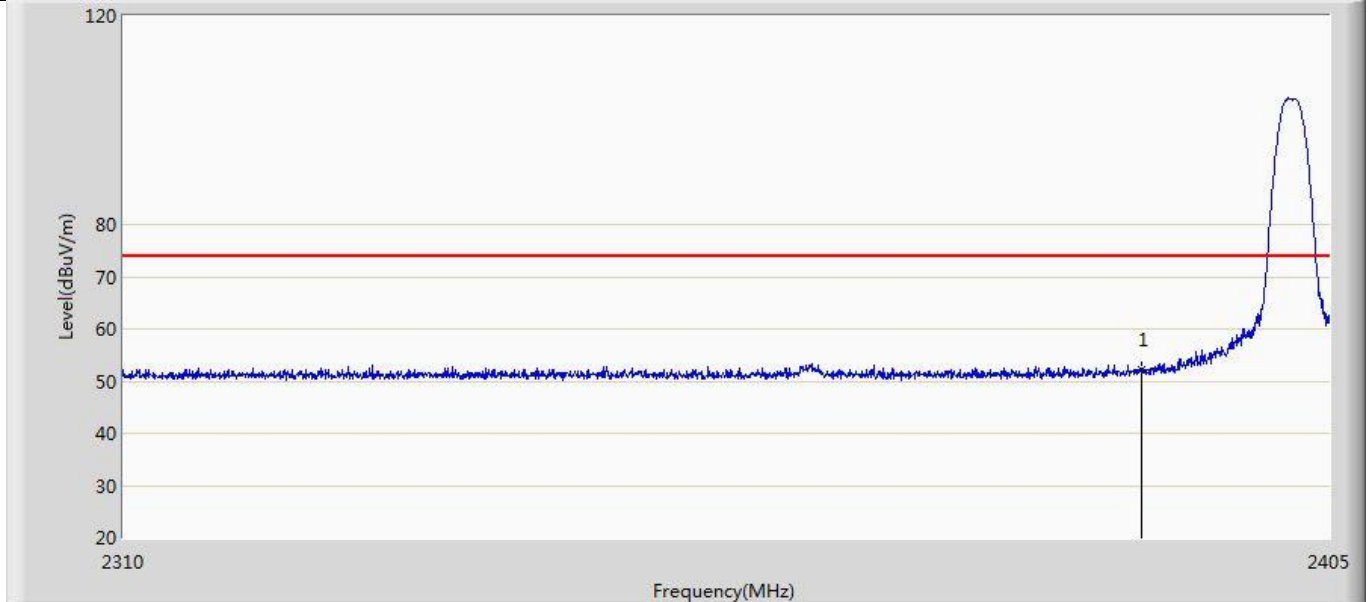


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2390.000	52.284	16.186	-21.716	74.000	36.098	PK

Profile: 2260060R	Page No.: 17
Engineer: Carlos. Shen	
Site: AC5	Time: 2022/07/05 - 21:26
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: LED Lamp	Power: AC 120V/60Hz
Note: Mode 4:Transmit at 2402MHz by LE_Coded S=8	

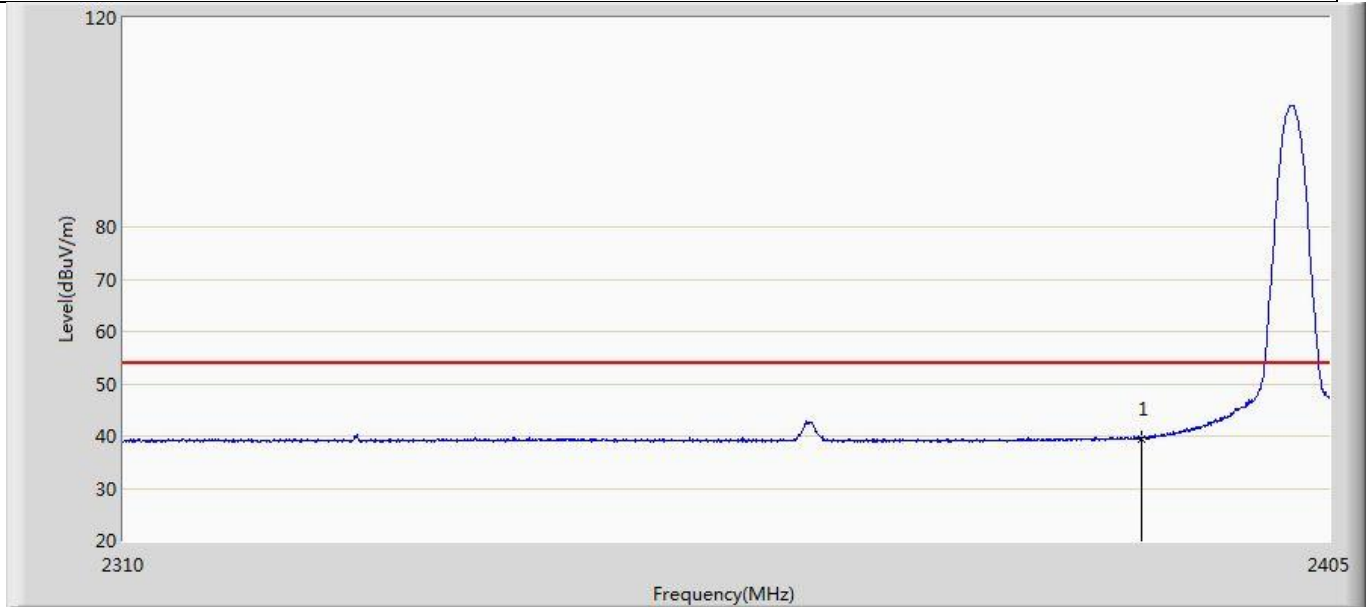


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2390.000	39.561	3.463	-14.439	54.000	36.098	AV

Profile: 2260060R	Page No.: 20
Engineer: Carlos. Shen	
Site: AC5	Time: 2022/07/05 - 21:27
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: LED Lamp	Power: AC 120V/60Hz
Note: Mode 4:Transmit at 2402MHz by LE_Coded S=8	

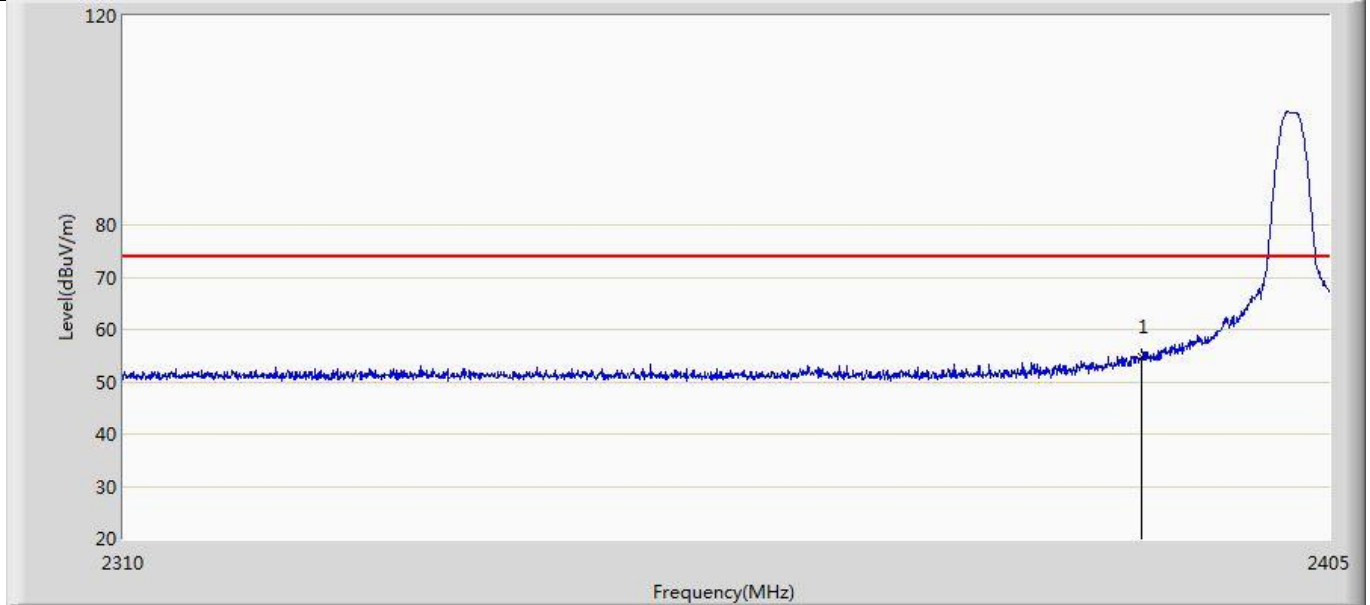


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2390.000	54.644	18.546	-19.356	74.000	36.098	PK

Profile: 2260060R	Page No.: 19
Engineer: Carlos. Shen	
Site: AC5	Time: 2022/07/05 - 21:27
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: LED Lamp	Power: AC 120V/60Hz
Note: Mode 4:Transmit at 2402MHz by LE_Coded S=8	

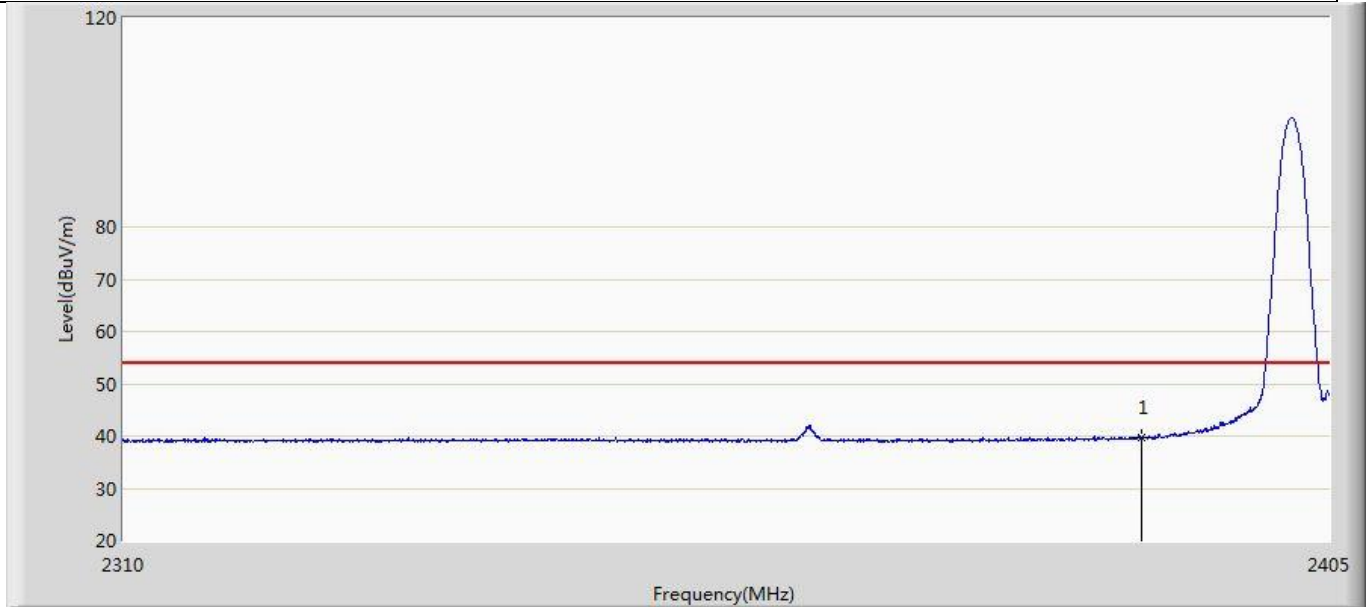


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2390.000	39.641	3.543	-14.359	54.000	36.098	AV

Profile: 2260060R	Page No.: 22
Engineer: Carlos. Shen	
Site: AC5	Time: 2022/07/05 - 22:05
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: LED Lamp	Power: AC 120V/60Hz
Note: Mode 4:Transmit at 2480MHz by LE_Coded S=8	

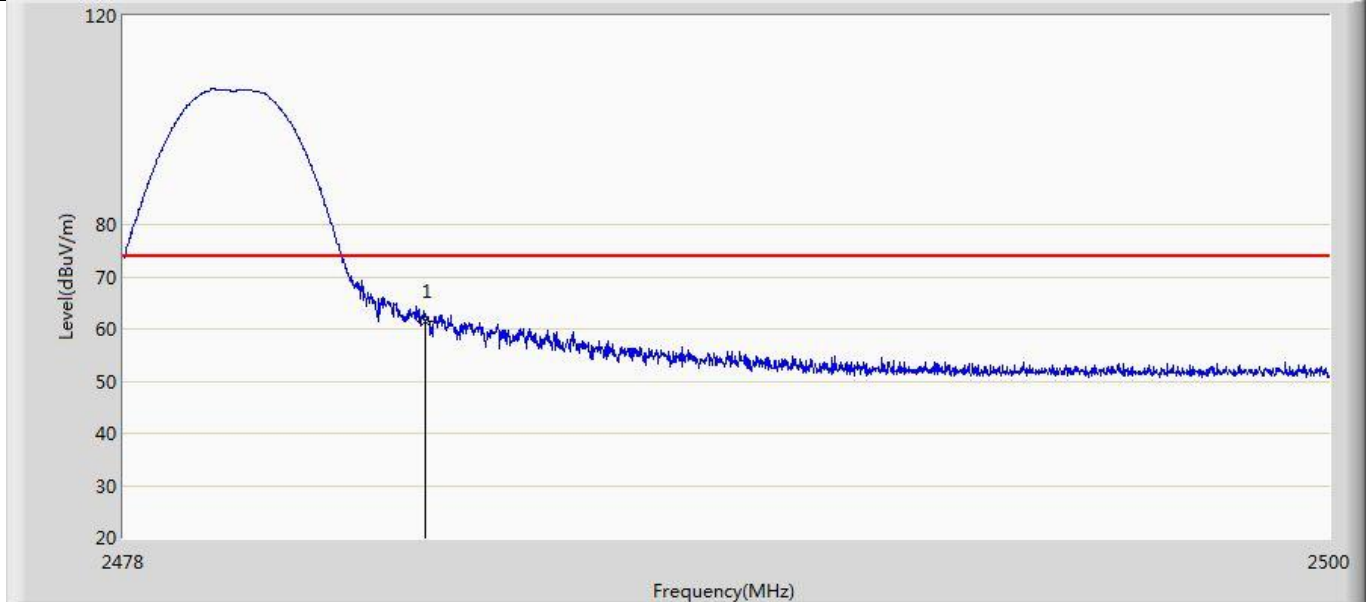


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2483.500	61.440	25.219	-12.560	74.000	36.220	PK

Profile: 2260060R	Page No.: 21
Engineer: Carlos. Shen	
Site: AC5	Time: 2022/07/05 - 22:03
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: LED Lamp	Power: AC 120V/60Hz
Note: Mode 4:Transmit at 2480MHz by LE_Coded S=8	

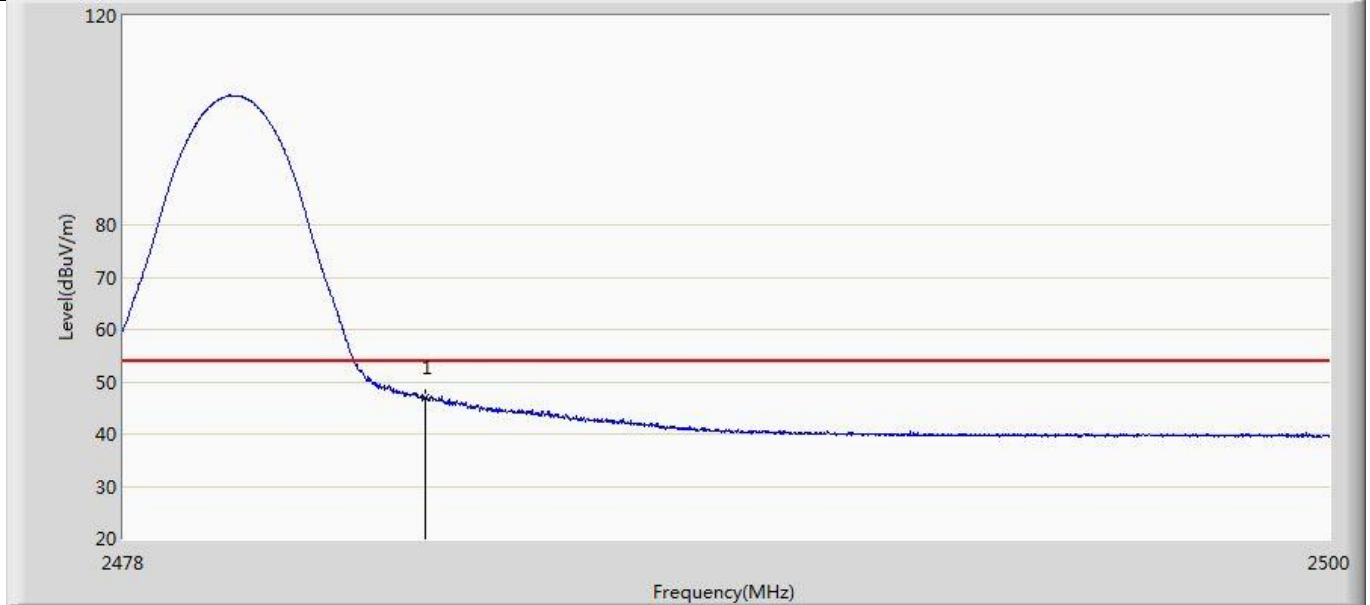


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2483.500	46.956	10.735	-7.044	54.000	36.220	AV

Profile: 2260060R	Page No.: 24
Engineer: Carlos. Shen	
Site: AC5	Time: 2022/07/05 - 22:07
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: LED Lamp	Power: AC 120V/60Hz
Note: Mode 4:Transmit at 2480MHz by LE_Coded S=8	

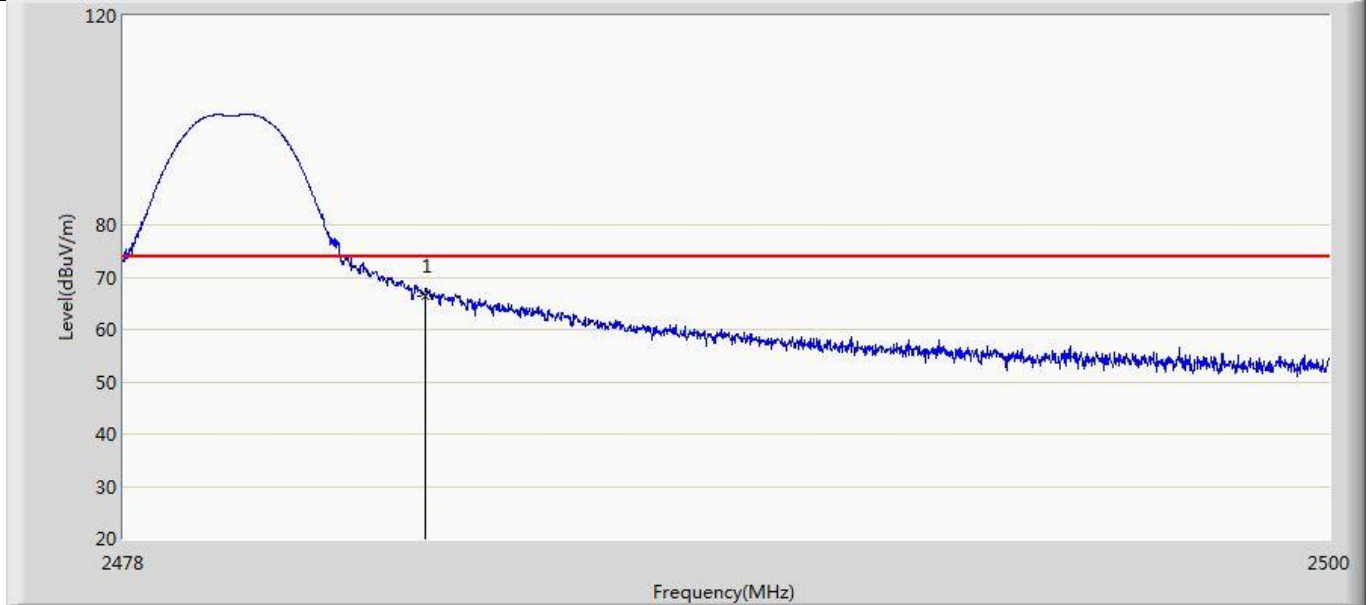

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2483.500	66.367	30.146	-7.633	74.000	36.220	PK

Profile: 2260060R	Page No.: 23
Engineer: Carlos. Shen	
Site: AC5	Time: 2022/07/05 - 22:06
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: LED Lamp	Power: AC 120V/60Hz
Note: Mode 4:Transmit at 2480MHz by LE_Coded S=8	

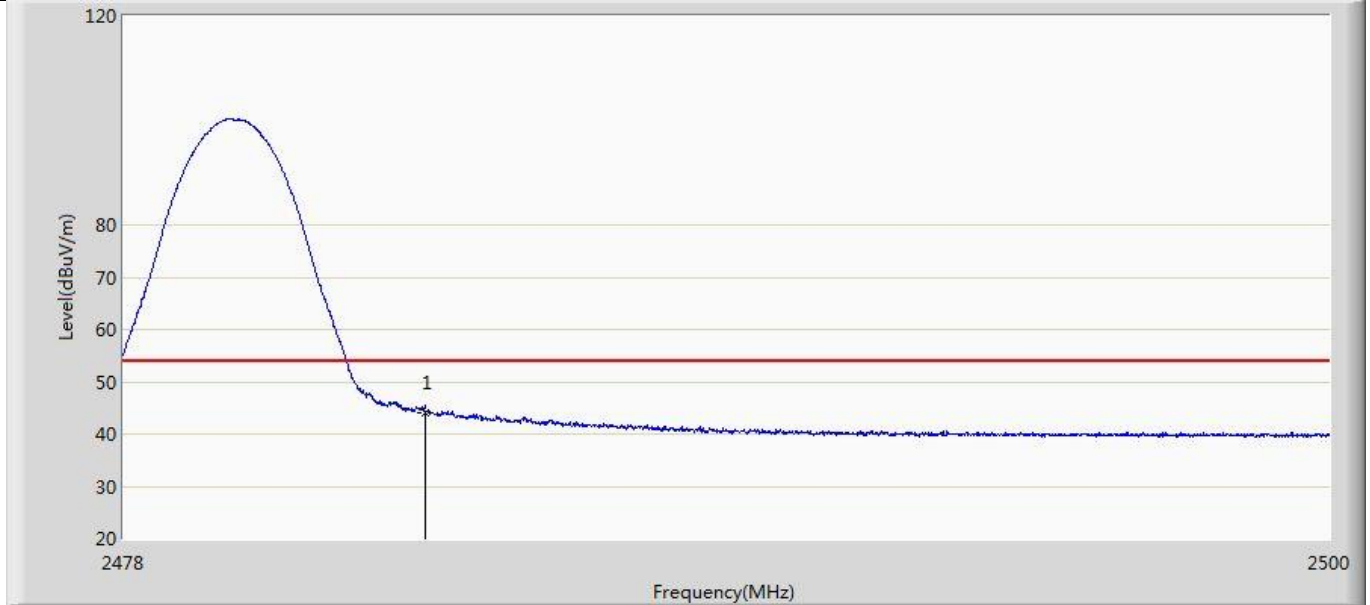

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2483.500	44.016	7.795	-9.984	54.000	36.220	AV

Note:


1. " * ", means this data is the worst emission level.
2. Measurement Level = Reading Level + Factor(Probe+Cable-Amp).

4.6 DTS Bandwidth	VERDICT: PASS
--------------------------	----------------------

4.6.1 Limit

Standard	FCC Part 15 Subpart C Paragraph 15.247 (a)(2)
Systems using digital modulation techniques operate in the 2400-2483.5 MHz. The minimum 6 dB bandwidth shall be at least 500 kHz	

4.6.2 Test Setup

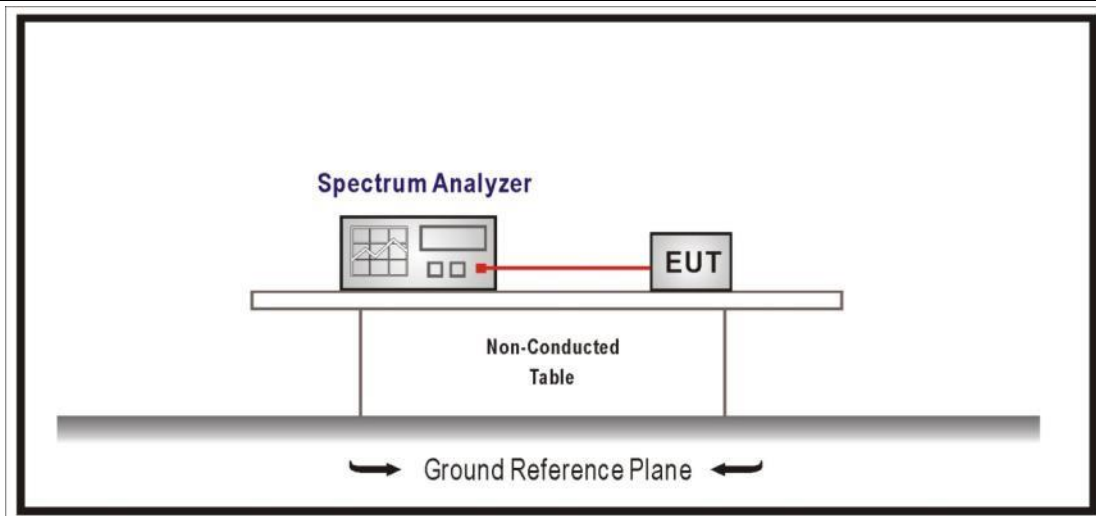

4.6.3 Test Procedure

	Reference Rule	Chapter	Description
<input checked="" type="checkbox"/>	ANSI C63.10	11.8	DTS bandwidth
<input type="checkbox"/>	ANSI C63.10	11.8.1	Option 1
<input checked="" type="checkbox"/>	ANSI C63.10	11.8.2	Option 2

4.6.4 Test Data

Mode	CH.	Test Freq. (MHz)	6dB Occupied Bandwidth (MHz)	Limit (kHz)	Result
1	00	2402	0.692	>500	Pass
	19	2440	0.688	>500	Pass
	39	2480	0.684	>500	Pass
2	00	2402	1.348	>500	Pass
	19	2440	1.348	>500	Pass
	39	2480	1.348	>500	Pass
3	00	2402	0.772	>500	Pass
	19	2440	0.772	>500	Pass
	39	2480	0.776	>500	Pass
4	00	2402	0.744	>500	Pass
	19	2440	0.744	>500	Pass
	39	2480	0.744	>500	Pass

Note : The worst case of Occupied Bandwidth as below:

6dB Occupied Bandwidth
Mode 1 / CH39 (2480MHz)




Mode	CH.	Test Freq. (MHz)	99% Occupied Bandwidth (MHz)	Limit	Result
1	00	2402	1.0341	N/A	Pass
	19	2440	1.0337	N/A	Pass
	39	2480	1.0334	N/A	Pass
2	00	2402	2.1169	N/A	Pass
	19	2440	2.1210	N/A	Pass
	39	2480	2.1287	N/A	Pass
3	00	2402	1.0953	N/A	Pass
	19	2440	1.0942	N/A	Pass
	39	2480	1.0921	N/A	Pass
4	00	2402	1.1293	N/A	Pass
	19	2440	1.1254	N/A	Pass
	39	2480	1.1232	N/A	Pass

Note : The worst case of Occupied Bandwidth as below:


99% Occupied Bandwidth

Mode 2 / CH39 (2480MHz)

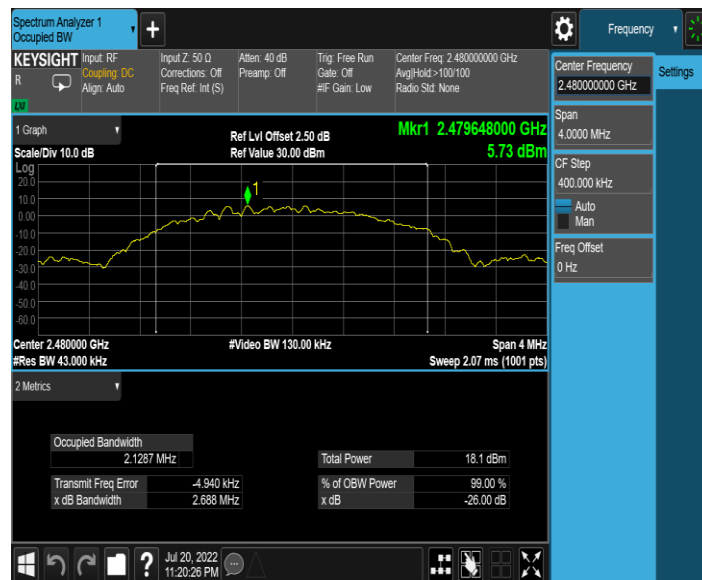

4.7 Fundamental emission output power	VERDICT: PASS
--	----------------------

4.7.1 Limit			
Standard	FCC Part 15 Subpart C Paragraph 15.247 (b)(3)		
<input checked="" type="checkbox"/>	GTX < 6dBi	Pout ≤ 30dBm	
<input type="checkbox"/>	GTX > 6dBi		
<input type="checkbox"/>	Non-Fix point-point	Pout ≤ 30 - (GTX - 6)	
<input type="checkbox"/>	Fix point-point	Pout ≤ 30 - [(GTX - 6)]/3	
<input type="checkbox"/>	Point-to-multipoint	Pout ≤ 30 - (GTX - 6)	
<input type="checkbox"/>	Overlap Beams	Pout ≤ 30 - [(GTX - 6)]/3	
<input type="checkbox"/>	Aggregate power transmitted simultaneously on all beams	Pout ≤ 30 - [(GTX - 6)]/3	
<input type="checkbox"/>	single directional beam	Pout ≤ 30 - [(GTX - 6)]/3 + 8dB	
Note 1 : GTX directional gain of transmitting antennas. Note 2 : Pout is maximum peak conducted output power .			

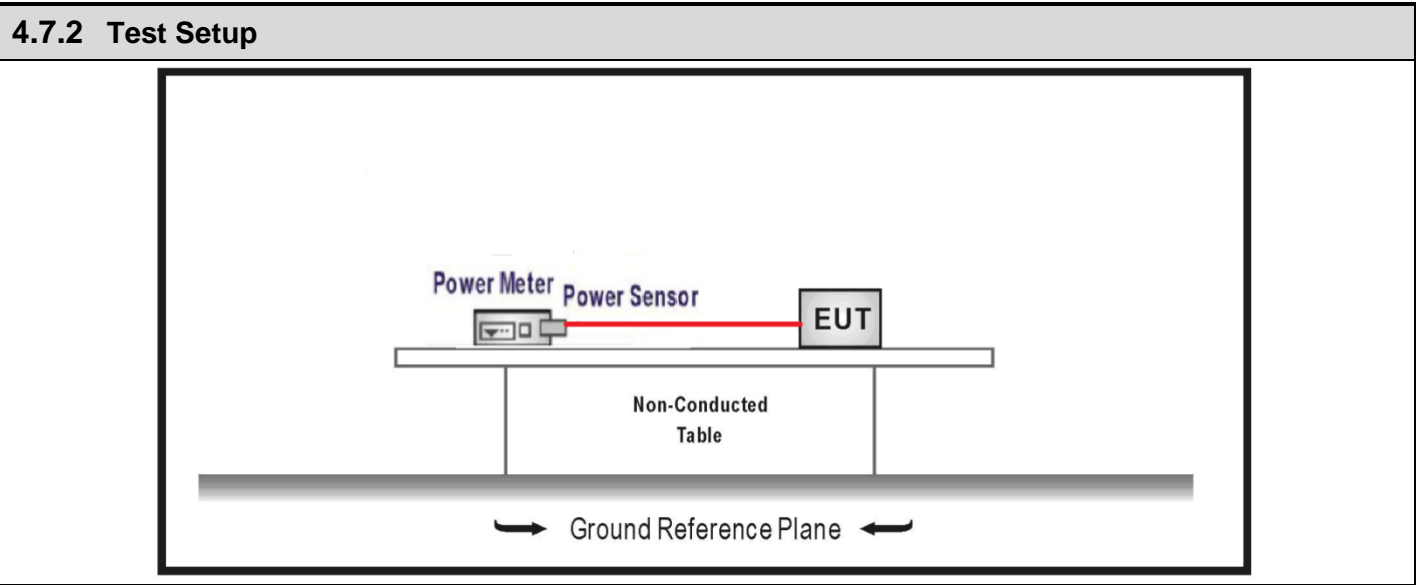

4.7.3 Test Procedure					
	References Rule		Chapter	Description	
<input checked="" type="checkbox"/>	ANSI C63.10		11.9	Fundamental emission output power	
<input checked="" type="checkbox"/>	ANSI C63.10		11.9.1	Maximum peak conducted output power	
	<input type="checkbox"/>	ANSI C63.10	11.9.1.1	RBW \geq DTS bandwidth	
	<input type="checkbox"/>	ANSI C63.10	11.9.1.2	Integrated band power method	
	<input type="checkbox"/>	ANSI C63.10	11.9.1.3	PKPM1 Peak power meter method	
	<input type="checkbox"/>	ANSI C63.10	11.9.2	Maximum conducted (average) output power	
	<input type="checkbox"/>	ANSI C63.10	11.9.2.2	Measurement using a spectrum analyzer (SA)	
		<input type="checkbox"/>	ANSI C63.10	11.9.2.2.2	Method AVGSA-1(Duty cycle \geq 98%)
		<input type="checkbox"/>	ANSI C63.10	11.9.2.2.3	Method AVGSA-1A(Duty cycle \geq 98%)
		<input type="checkbox"/>	ANSI C63.10	11.9.2.2.4	Method AVGSA-2(Duty cycle \leq 98%)
		<input type="checkbox"/>	ANSI C63.10	11.9.2.2.5	Method AVGSA-2A(Duty cycle \leq 98%)
		<input type="checkbox"/>	ANSI C63.10	11.9.2.2.4	Method AVGSA-3
		<input type="checkbox"/>	ANSI C63.10	11.9.2.2.5	Method AVGSA-3A
	<input checked="" type="checkbox"/>	ANSI C63.10	11.9.2.3	Measurement using a power meter (PM)	
		<input checked="" type="checkbox"/>	ANSI C63.10	11.9.2.3.1	Method AVGPM
		<input type="checkbox"/>	ANSI C63.10	11.9.2.3.2	Method AVGPM-G

4.7.4 Test Data

Mode	Channel	Test Frequency (MHz)	Power Output (dBm)	Limit (dBm)	EIRP (dBm)	Limit (dBm)	Result
Mode 1	00	2402	6.21	≤30	8.67	≤36	Pass
	19	2440	6.25	≤30	8.71	≤36	Pass
	39	2480	6.28	≤30	8.74	≤36	Pass
Mode 2	00	2402	6.23	≤30	8.69	≤36	Pass
	19	2440	6.24	≤30	8.70	≤36	Pass
	39	2480	6.29	≤30	8.75	≤36	Pass
Mode 3	00	2402	6.25	≤30	8.71	≤36	Pass
	19	2440	6.28	≤30	8.74	≤36	Pass
	39	2480	6.31	≤30	8.77	≤36	Pass
Mode 4	00	2402	6.26	≤30	8.72	≤36	Pass
	19	2440	6.28	≤30	8.74	≤36	Pass
	39	2480	6.33	≤30	8.79	≤36	Pass

Note 1: EIRP= Power Output + Antenna gain

Note 2: Please refer to clause 1.2 for antenna gain.

4.8 Power Density


VERDICT: PASS

4.8.1 Limit:

Standard FCC Part 15 Subpart C Paragraph 15.247 (b)(3)

Power Spectral Density ≤ 8dBm/3kHz

4.8.2 Test Setup

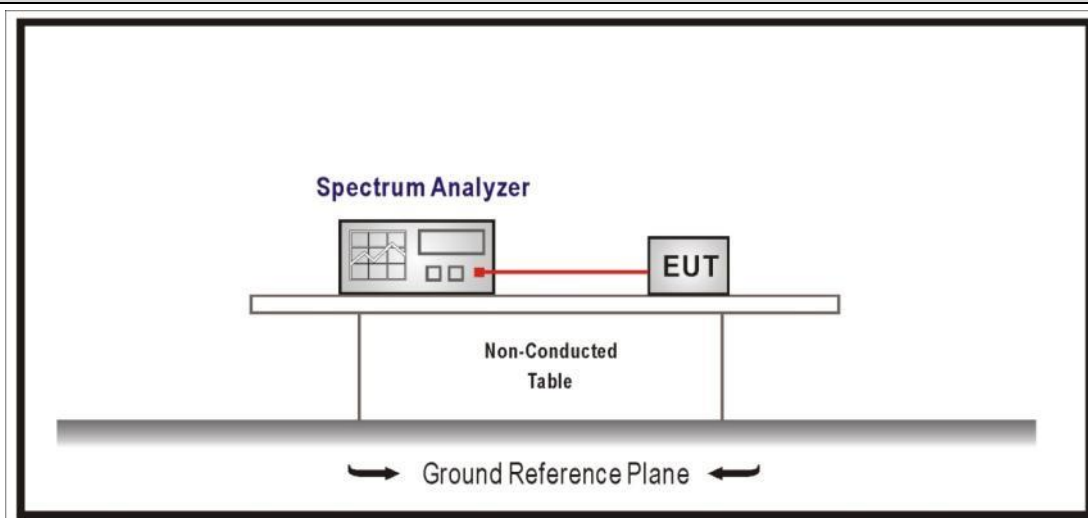


4.8.3 Test Procedure

	References Rule	Chapter	Description
<input checked="" type="checkbox"/>	ANSI C63.10	11.10	Maximum power spectral density level in the fundamental emission
	<input checked="" type="checkbox"/> ANSI C63.10	11.10.2	Method PKPSD (peak PSD)
	<input type="checkbox"/> ANSI C63.10	11.10.3	Method AVGPSD-1(Duty cycle ≥ 98%)
	<input type="checkbox"/> ANSI C63.10	11.10.4	Method AVGPSD-1A(Duty cycle ≥ 98%)
	<input type="checkbox"/> ANSI C63.10	11.10.5	Method AVGPSD-2(Duty cycle < 98%)
	<input type="checkbox"/> ANSI C63.10	11.10.6	Method AVGPSD-2A(Duty cycle < 98%)
	<input type="checkbox"/> ANSI C63.10	11.10.7	Method AVGPSD-3
	<input type="checkbox"/> ANSI C63.10	11.10.8	Method AVGPSD-3A

4.8.4 Test Data

Mode	Channel	Test Frequency (MHz)	Measurement PSD (dBm/3kHz)	Limit (dBm/3kHz)	Result
Mode 1	00	2402	-9.11	≤8	Pass
	19	2440	-9.33	≤8	Pass
	39	2480	-9.70	≤8	Pass
Mode 2	00	2402	-11.62	≤8	Pass
	19	2440	-11.92	≤8	Pass
	39	2480	-12.05	≤8	Pass
Mode 3	00	2402	-11.42	≤8	Pass
	19	2440	-11.70	≤8	Pass
	39	2480	-11.82	≤8	Pass
Mode 4	00	2402	0.57	≤8	Pass
	19	2440	0.27	≤8	Pass
	39	2480	0.10	≤8	Pass

Note : The worst case of PSD as below:

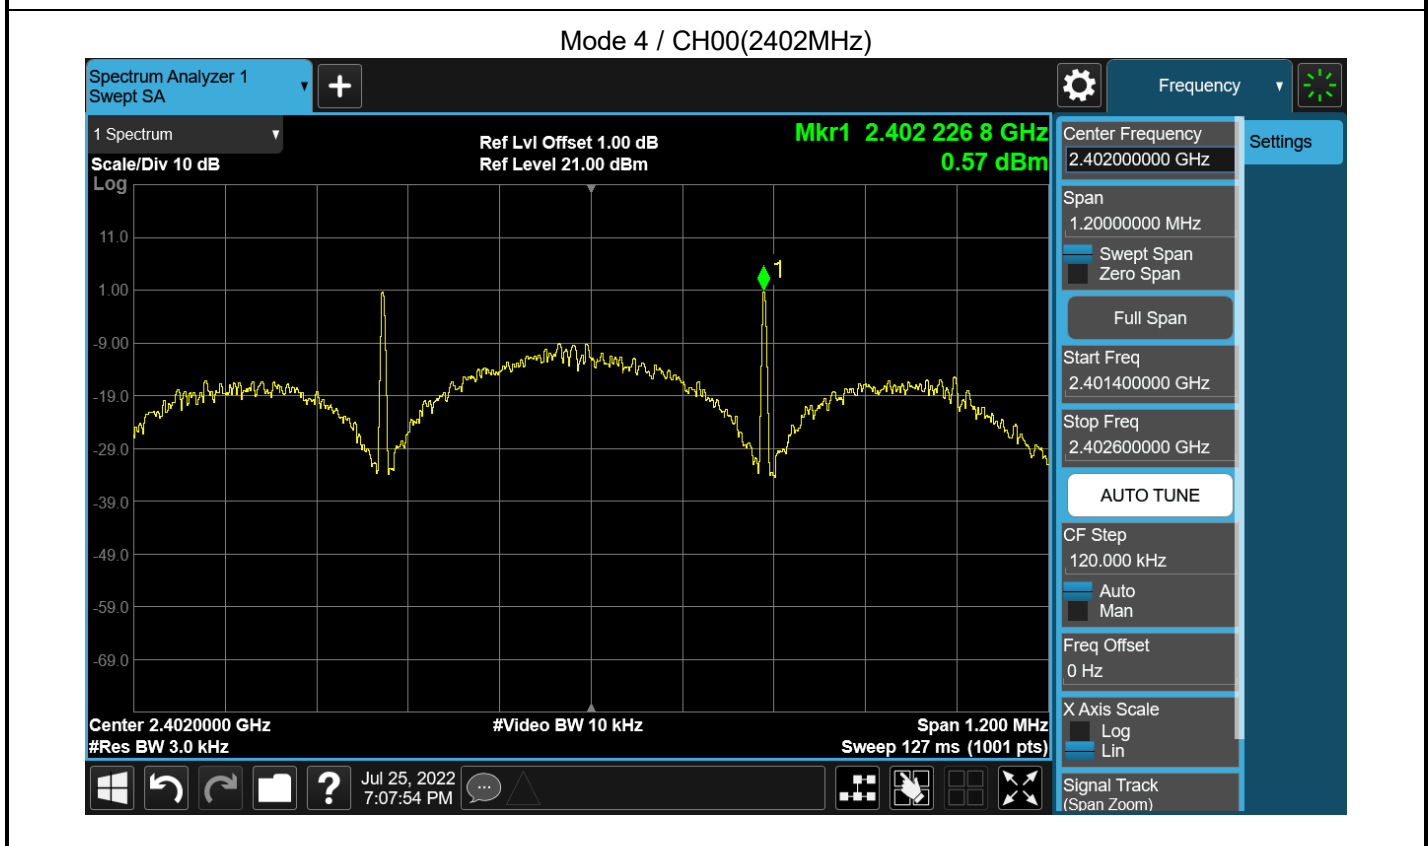

4.9 Antenna Requirement

VERDICT: PASS

4.9.1 Limit:

Standard	FCC Part 15 Subpart C Paragraph 15.203
-----------------	--

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §15.211, §15.213, §15.217, §15.219, or §15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

4.9.2 Antenna Connector Construction:

- | | |
|-------------------------------------|--|
| <input checked="" type="checkbox"/> | The use of a permanently attached antenna |
| <input type="checkbox"/> | The antenna use of a unique coupling to the intentional radiator |
| <input type="checkbox"/> | The use of a nonstandard antenna jack or electrical connector |

Please refer to the attached document "Internal Photograph" to show the antenna connector.

5 TEST SETUP PHOTO AND EUT PHOTO

Remark: The test setup photo and EUT Photo please see appendix.

_____ The End _____