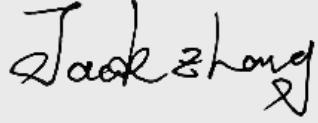


Test report No:
2420073R-RF-US-P06V02

FCC & ISED TEST REPORT

Product Name	LED lamp
Trademark	PHILIPS
Model and /or type reference	9290031516A, 9290031517A, 9290031519A, 9290031520A
FCC ID	2AGBW9290031520AX
IC	20812-31520AX
Applicant's name / address	Signify (China) investment Co., Ltd Building no.9, Lane 888, Tianlin Road, Minhang District, Shanghai, China
Test method requested, standard	FCC CFR Title 47 Part 15 Subpart C Section 15.247 ANSI C63.10: 2013 RSS-Gen Issue 5 Amendment 2/ RSS-247 Issue 3
Verdict Summary	IN COMPLIANCE
Documented by (name / position & signature)	Tim Cao/Project Manager 
Approved by (name / position & signature)	Jack Zhang/ Manager 
Date of issue	2024-03-06
Report Version	V1.0
Report template No	Template_FCC Part 15C-RF-V1.0

INDEX

	page
General conditions	4
Environmental conditions	4
Possible test case verdicts	5
Abbreviations.....	5
Document History.....	6
Remarks and Comments	6
Used Equipment.....	7
Uncertainty	9
1 General Information	10
1.1 General Description of the Item(s).....	10
1.2 Antenna Information	11
1.3 Channel List.....	12
2 Description of Test Setup.....	13
2.1 Operating mode(s) used for tests	13
2.2 Auxiliary equipment / Test software for the EUT	13
2.3 Test Configuration / Block diagram used for tests.....	14
2.4 Testing process	15
3 Verdict summary section.....	16
3.1 Standards	16
3.2 Deviation(s) from the Standard(s) / Test Specification(s).....	16
3.3 Overview of results	17
3.4 Power setting in test	18
3.5 Test Matrix	18
3.6 Test Facility.....	19
4 Test Results	20
4.1 AC Power Line Conducted Emission.....	20
4.1.1 Limit	20
4.1.2 Test Setup	20
4.1.3 Test Procedure	20
4.2 Emissions in restricted frequency bands	21
4.2.1 Limit	21
4.2.2 Test Setup	23
4.2.3 Test Procedure	24
4.3 Emissions in non-restricted frequency band	25

4.3.1 Limit	25
4.3.2 Test Setup	25
4.3.3 Test Procedure	25
4.4 Duty cycle	26
4.4.1 Limit	26
4.4.2 Test Setup	26
4.4.3 Test Procedure	26
4.5 Radiated Emission Band Edge	27
4.5.1 Limit	27
4.5.2 Test Setup	27
4.5.3 Test Procedure	27
4.6 DTS Bandwidth	28
4.6.1 Limit	28
4.6.2 Test Setup	28
4.6.3 Test Procedure	28
4.7 Fundamental emission output power	29
4.7.1 Limit	29
4.7.2 Test Setup	29
4.7.3 Test Procedure	30
4.8 Power Density	31
4.8.1 Limit:	31
4.8.2 Test Setup	31
4.8.3 Test Procedure	31
4.9 Antenna Requirement	32
4.9.1 Limit:	32
4.9.2 Antenna Connector Construction:	32
5 Test setup photo and EUT Photo	33
Appendix A: AC Power Line Conducted Emission	34
Appendix B: Emissions in restricted frequency bands	36
Appendix C: Duty cycle	44
Appendix D: Emissions in non-restricted frequency bands	46
Appendix E: Radiated Emission Band Edge	71
Appendix F: Fundamental emission output power	79
Appendix G: DTS Bandwidth	80
Appendix H: Power Spectral Density	84

COMPETENCES AND GUARANTEES

DEKRA is a testing laboratory competent to carry out the tests described in this report.

In order to assure the traceability to other national and international laboratories, DEKRA has a calibration and maintenance program for its measurement equipment.

DEKRA guarantees the reliability of the data presented in this report, which is the result of the measurements and the tests performed to the item under test on the date and under the conditions stated in the report and it is based on the knowledge and technical facilities available at DEKRA at the time of performance of the test.

DEKRA is liable to the client for the maintenance of the confidentiality of all information related to the item under test and the results of the test.

The results presented in this Test Report apply only to the particular item under test established in this document.

IMPORTANT: No parts of this report may be reproduced or quoted out of context, in any form or by any means, except in full, without the previous written permission of DEKRA.

GENERAL CONDITIONS

Test Location	No. 99, Hongye Road, Suzhou Industrial Park Suzhou, 215006, P.R. China
Date(receive sample)	Jan. 22, 2024
Date (start test)	Jan. 25, 2024
Date (finish test)	Feb. 22, 2024

1. This report is only referred to the item that has undergone the test.
2. This report does not constitute or imply on its own an approval of the product by the Certification Bodies or Competent Authorities.
3. This document is only valid if complete; no partial reproduction can be made without previous written permission of DEKRA.
4. This test report cannot be used partially or in full for publicity and/or promotional purposes without previous written permission of DEKRA.

ENVIRONMENTAL CONDITIONS

The climatic conditions during the tests are within the limits specified by the manufacturer for the operation of the EUT and the test equipment. The climatic conditions during the tests were within the following limits:

Ambient temperature	15 °C – 35 °C
Relative Humidity air	30% - 60%

If explicitly required in the basic standard or applied product / product family standard the climatic values are recorded and documented separately in this test report.

POSSIBLE TEST CASE VERDICTS

Test case does not apply to test object	N/A
Test object does meet requirement	P (Pass) / PASS
Test object does not meet requirement	F (Fail) / FAIL
Not measured	N/M

ABBREVIATIONS

For the purposes of the present document, the following abbreviations apply:

EUT	: Equipment Under Test
QP	: Quasi-Peak
CAV	: CISPR Average
AV	: Average
CDN	: Coupling Decoupling Network
SAC	: Semi-Anechoic Chamber
OATS	: Open Area Test Site
BW	: Bandwidth
AM	: Amplitude Modulation
PM	: Pulse Modulation
HCP	: Horizontal Coupling Plane
VCP	: Vertical Coupling Plane
U_N	: Nominal voltage
T_x	: Transmitter
R_x	: Receiver
N/A	: Not Applicable
N/M	: Not Measured

DOCUMENT HISTORY

Report No.	Version	Description	Issued Date
2420073R-RF-US-P06V02	V1.0	Initial issue of report.	2024-03-06

REMARKS AND COMMENTS

1. The equipment under test (EUT) does meet the essential requirements of the stated standard(s)/test(s).
2. These test results on a sample of the device are for the purpose of demonstrating Compliance with FCC 47CFR §15.247, ANSI C63.10: 2013, RSS-Gen Issue 5 Amendment 2 and RSS-247 Issue 3.
3. The measurement result is considered in conformance with the requirement if it is within the prescribed limit, It is not necessary to account the uncertainty associated with the measurement result.
4. The test results presented in this report relate only to the object tested.
5. The test report shall not be reproduced without the written approval of DEKRA Testing and Certification (Suzhou) Co., Ltd.
6. This report will not be used for social proof function in China market.
7. DEKRA declines any responsibility with the following test data provided by customer that may affect the validity of result:
 - Chapter 1.1 General Description of the Item(s);
 - Chapter 1.2 Antenna Information;
 - Chapter 1.3 Channel List.

USED EQUIPMENT

AC Power Line Conducted Emission / TR1

Instrument	Manufacturer	Model No.	Serial No.	Cal. Date	Next Cal. Date	Firmware Version	Software version
EMI Test Receiver	R&S	ESCI	100906	2023.08.26	2024.08.25	4.42 SP3	N/A
Two-Line V-Network	R&S	ENV216	101044	2023.11.08	2024.11.07	N/A	N/A
Current Probe	R&S	EZ-17	100678	2023.11.02	2024.11.01	N/A	N/A
50ohm Coaxial Switch	Anritsu	MP59B	6200464462	2023.05.14	2024.05.13	N/A	N/A
50ohm Termination	Xinghu	N/A	N/A	2023.02.10	2024.02.09	N/A	N/A
50ohm Termination	Xinghu	N/A	N/A	2024.02.06	2025.02.05	N/A	N/A
Temperature/Humidity Meter	RTS	RTS-8S	TR1-TH	2023.07.06	2024.07.05	N/A	N/A
Coaxial Cable	Suhner	RG 223	TR1-C1	2023.05.14	2024.05.13	N/A	N/A
Dekra test software	Dekra	N/A	N/A	N/A	N/A	N/A	3

Emissions in non-restricted frequency bands/ Occupied Bandwidth/ Fundamental emission output power Power Spectral Density / TR8

Instrument	Manufacturer	Model No.	Serial No.	Cal.Date	Next Cal. Date	Firmware Version	Software version
Wireless Connectivity Tester	R&S	CMW 270	102593	2023.05.20	2024.05.19	V 4.0.60	N/A
Coaxial Cable	N/A	N/A	2477	2023.06.08	2024.06.07	N/A	N/A
Coaxial Cable	N/A	N/A	2478	2023.06.08	2024.06.07	N/A	N/A
High and low temperature and fast temperature change test box	ASTUOD	ASTD-FBT-225K	N/A	2023.05.20	2024.05.19	N/A	N/A
Temperature/Humidity Meter	RTS	RTS-8S	RF08	2023.08.25	2024.08.24	N/A	N/A
Test system							
Instrument	Manufacturer	Model No.	Serial No.	Cal.Date	Next Cal. Date	Firmware Version	Software version
MAX Signal Analyzer	Keysight	N9010A	MY48030494	2023.11.08	2024.11.07	A.14.03	N/A
RF Control Unit	Tonscend	JS0806-2	22G8060594	2023.02.14	2024.02.13	N/A	N/A
RF Control Unit	Tonscend	JS0806-2	22G8060594	2024.02.06	2025.02.05	N/A	N/A
MXG-B RF Vector Signal Generator	Keysight	N5182B	MY61252529	2023.05.20	2024.05.19	B.01.96	N/A
Frequency extender for EXG or MXG	Keysight	N5182BX07	MY59362500	2023.05.20	2024.05.19	N/A	N/A
EXG-B MW Analog Signal Generator	Keysight	N5173B	MY61252566	2023.08.26	2024.08.25	B.01.95	N/A
Test Software	Tonscend	TS1120	JS1120-3	N/A	N/A	N/A	V3.0.22

Radiated Emission(30MHz-1GHz) / AC3

Instrument	Manufacturer	Model No.	Serial No.	Cal. Date	Next Cal. Date	Firmware Version	Software version
EMI Test Receiver	R&S	ESCI	100573	2023.09.17	2024.09.16	4.42 SP3	N/A
Loop Antenna	R&S	HFH2-Z2E	101149	2023.04.25	2024.04.24	N/A	N/A
Bilog Antenna	Teseq GmbH	CBL6112D	27611	2023.02.20	2024.02.19	N/A	N/A
Temperature/Humidity Meter	RTS	RTS-8S	AC2-TH	2023.05.19	2024.05.18	N/A	N/A
Coaxial Cable	Huber+Suhner	SUCOFLEX 106	AC2-C	2023.05.21	2024.05.20	N/A	N/A
Dekra test software	Dekra	N/A	N/A	N/A	N/A	N/A	3

Radiated Emission / AC5(1GHz-40GHz)(Chamber details)

Instrument	Manufacturer	Model No.	Serial No.	Cal. Date	Next Cal. Date	Firmware Version	Software version
EXA Spectrum Analyzer	Keysight	N9020B	MY60112218	2023.11.08	2024.11.07	A.31.05	N/A
Pre-Amplifier	SKET	LNPA_0118G-45	SK2021090101	2023.05.14	2024.05.13	N/A	N/A
Preamplifier	CHENGYI	EMC184045SE	980263	2023.07.09	2024.07.08	N/A	N/A
DRG Horn	ETS-Lindgren	3117	123988	2023.11.07	2024.11.06	N/A	N/A
Broad-Band Horn Antenna	Schwarzbeck	BBHA9170	294	2023.05.31	2024.05.30	N/A	N/A
Filter Switch Box	MVE	MSW-F196	C070001S	2023.05.21	2024.05.20	N/A	N/A
Temperature/Humidity Meter	RTS	RTS-8S	AC5-TH	2023.05.19	2024.05.18	N/A	N/A
Coaxial Cable	ROSENBERGER	LA1-C011-2000/3000	AC5-40G	2023.03.04	2024.03.03	N/A	N/A
Coaxial Cable	ROSENBERGER	LA1-C011-2000/3000	AC5-40G-2	2023.05.21	2024.05.20	N/A	N/A
Cable	Rosenberger	LA1-C011-1000	0523	2023.05.21	2024.05.20	N/A	N/A
Cable	Rosenberger	LA1-C011-1000	0623	2023.05.21	2024.05.20	N/A	N/A
Dekra test software	Dekra	N/A	N/A	N/A	N/A	N/A	3

UNCERTAINTY

Uncertainties have been calculated according to the DEKRA internal document. The reported expanded uncertainties are based on a standard uncertainty multiplied by a coverage factor of k=2, providing a level of confidence of approximately 95% .

Test item	Uncertainty
AC Power Line Conducted Emission	9kHz~150kHz: 2.80dB 150kHz~30MHz: 2.40dB
Peak Power Output	± 1.27 dB
Radiated Emission(30MHz~1GHz)	Horizontal: 30MHz~200MHz: 3.50 dB 300MHz~1GHz: 3.60 dB Vertical: 30MHz~200MHz: 3.60 dB 300MHz~1GHz: 3.50 dB
Radiated Emission(1GHz~26.5GHz)	Horizontal: 1GHz~18GHz: 5.00 dB Vertical: 1GHz~18GHz: 4.80 dB
RF antenna conducted test	± 1.27dB
Radiated Emission Band Edge	± 3.9 dB
DTS Bandwidth	±150Hz
Occupied Bandwidth	±1kHz
Power Density	±1.27dB

1 GENERAL INFORMATION

1.1 General Description of the Item(s)

Product Name	LED lamp
Model No.	9290031516A, 9290031517A, 9290031519A, 9290031520A
Trademark.....	PHILIPS
FCC ID	2AGBW9290031520AX
IC	20812-31520AX
Manufacturer	Signify (China) investment Co., Ltd
Manufacturer address	Building No.9, Lane 888, Tianlin Road, Minhang district, 200233 Shanghai, China
Model Difference(s)	All models are identical except different model name and size of bulb. The EUT used in test is 9290031516A.

Wireless specification.....	Zigbee
Operating frequency range(s)	2405~2480MHz
Type of Modulation.....	O-QPSK
Data Rate	250kbps
Number of channel.....	16

Rated power supply	Voltage and Frequency	
	<input type="checkbox"/>	AC: 220 – 240 Vac, 50/60 Hz
	<input checked="" type="checkbox"/>	AC: 110 – 130 Vac, 50/60 Hz
	<input type="checkbox"/>	DC:
	<input type="checkbox"/>	Battery:
	<input type="checkbox"/>	PoE:
Mounting position	<input type="checkbox"/>	Table top equipment
	<input checked="" type="checkbox"/>	Wall/Ceiling mounted equipment
	<input type="checkbox"/>	Floor standing equipment
	<input type="checkbox"/>	Hand-held equipment
	<input type="checkbox"/>	Other:

1.2 Antenna Information

Antenna model / type number	N/A		
Antenna serial number	N/A		
Antenna Delivery	<input checked="" type="checkbox"/>	1TX + 1RX	
	<input type="checkbox"/>	2TX + 2RX	
	<input type="checkbox"/>	Others:.....	
Antenna technology	<input checked="" type="checkbox"/>	SISO	
	<input type="checkbox"/>	MIMO	<input type="checkbox"/> CDD <input type="checkbox"/> Beam-forming
	<input type="checkbox"/>	External	<input type="checkbox"/> Dipole <input type="checkbox"/> Sectorized
Antenna Type	<input checked="" type="checkbox"/>	Internal	<input type="checkbox"/> Ceramic Chip <input type="checkbox"/> PIFA <input checked="" type="checkbox"/> PCB <input type="checkbox"/> Metal <input type="checkbox"/> Others.....
Antenna Gain	0.32 dBi		

1.3 Channel List

Working Frequency of Each Channel: For Zigbee

Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
11	2405 MHz	12	2410 MHz	13	2415 MHz	14	2420 MHz
15	2425 MHz	16	2430 MHz	17	2435 MHz	18	2440 MHz
19	2445 MHz	20	2450 MHz	21	2455 MHz	22	2460 MHz
23	2465 MHz	24	2470 MHz	25	2475 MHz	26	2480 MHz

Note: The General Description of the Item , antenna information and Channel List for the EUT in clause 1 are provided and confirmed by the client.

2 DESCRIPTION OF TEST SETUP

2.1 Operating mode(s) used for tests

During the tests the following operating mode(s) has(have) been used.


Test Mode For Zigbee	Mode1: Transmit by Zigbee
----------------------	---------------------------

2.2 Auxiliary equipment / Test software for the EUT


Auxiliary equipment	Type / Version	Manufacturer	Supplied by
Notebook	Think pad x220	Lenovo	Adapter
software	Type / Version	Manufacturer	Supplied by
Approbation Tool	V1.1.5.0	N/A	N/A

2.3 Test Configuration / Block diagram used for tests

Test setup Diagram- AC Line Conducted Emission Test

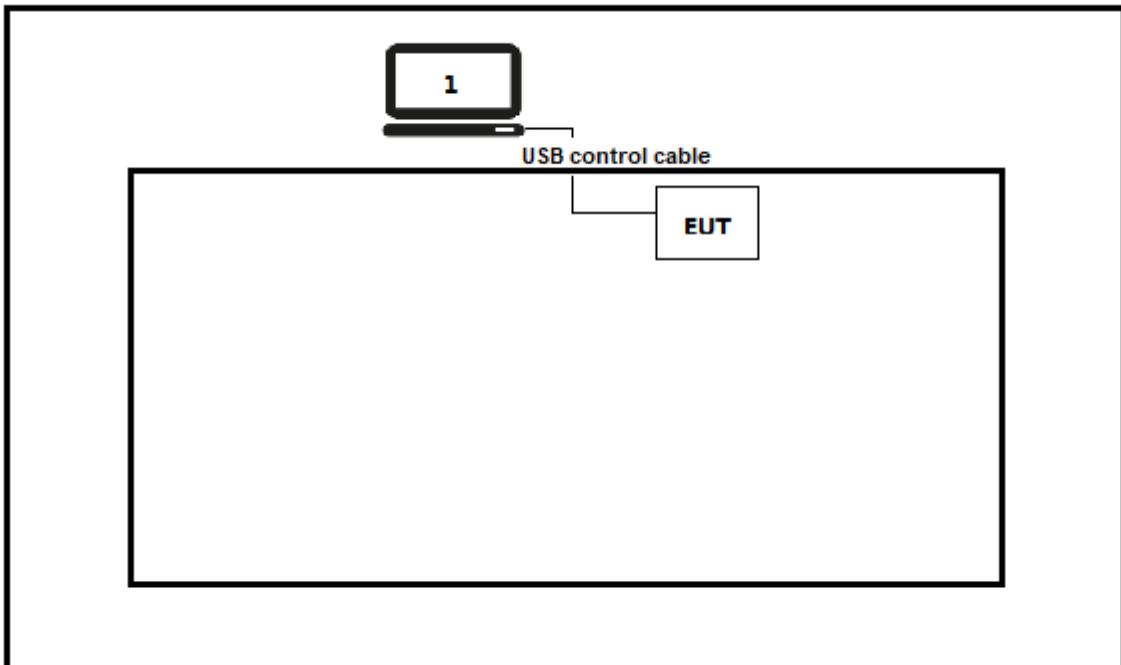

Test setup Diagram- Conducted test

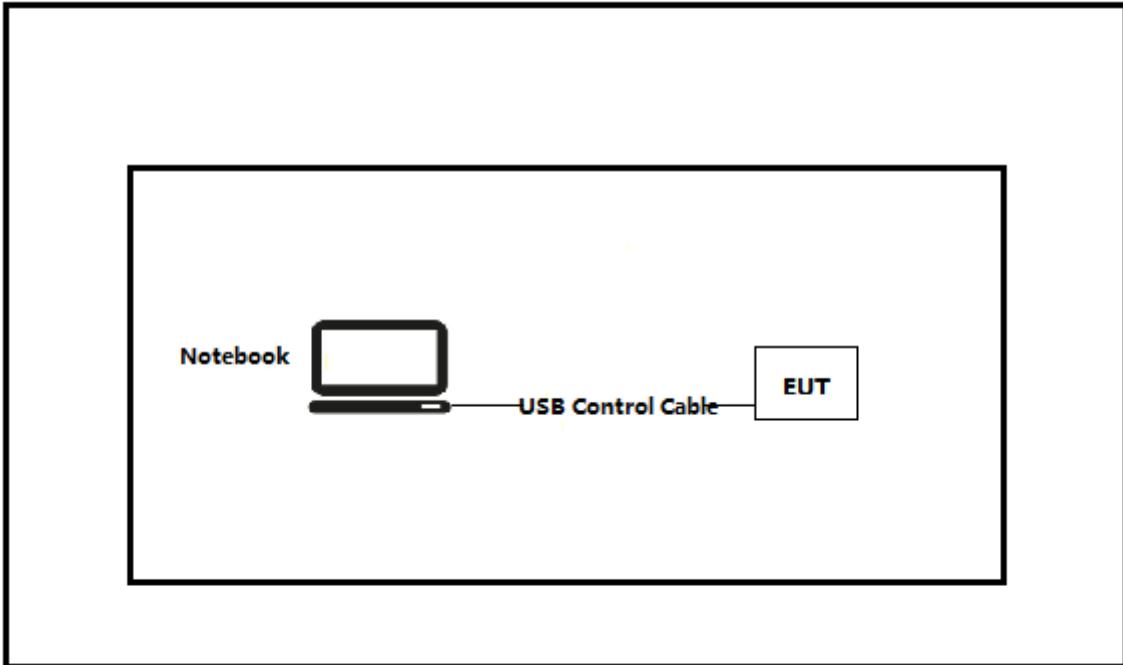

2.4 Testing process

1	Setup the EUT as shown in Section 2.3.
2	Execute the [Approbation Tool] on the notebook.
3	Configure the test mode, the test channel, and the data rate.
4	Verify that the EUT works properly.

3 VERDICT SUMMARY SECTION

This chapter presents an overview of standards and results. Refer to the next chapters for details of measured test results and applied test levels.

3.1 Standards

Standard	Year	Description
FCC CFR Title 47 Part 15 Subpart C Section 15.247	2024	Operation within the bands 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz.
ANSI C63.10	2013	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices
KDB 558074 D01 v05r02	2019	Guidance for performing compliance measurements on Digital Transmission System (DTS) operating under section 15.247
RSS-Gen Issue 5 Amendment 2	2021	General Requirements for Compliance of Radio Apparatus
RSS-247 Issue 3	2023	Digital Transmission Systems (DTSs), Frequency Hopping Systems (FHSs) and Licence-Exempt Local Area Network (LE-LAN) Devices

3.2 Deviation(s) from the Standard(s) / Test Specification(s)

The following deviation(s) was / were made from the published requirements of the listed standards: N/A.

(Please define the deviations from the standard(s) if applicable)

3.3 Overview of results

For FCC

Requirement – Test case	Basic standard(s)	Verdict	Remark
AC Power Line Conducted Emission	FCC 15.207	PASS	Refer to Appendix A for test data
Emissions in restricted frequency bands	FCC 15.247(b)(3)	PASS	Refer to Appendix B for test data
Duty cycle	ANSI C63.10:2013	PASS	Refer to Appendix C for test data
Emissions in non-restricted frequency bands	FCC 15.247(d), FCC 15.209	PASS	Refer to Appendix D for test data
Radiated Emission Band Edge	FCC 15.247(d)	PASS	Refer to Appendix E for test data
Fundamental emission output power	FCC 15.247(d), FCC 15.209	PASS	Refer to Appendix F for test data
DTS Bandwidth	FCC 15.247(a)(2)	PASS	Refer to Appendix G for test data
Power Spectral Density	FCC 15.247(e)	PASS	Refer to Appendix H for test data
Antenna Requirement	FCC 15.203	PASS	---

For ISED

Requirement – Test case	Basic standard(s)	Verdict	Remark
AC Power Line Conducted Emission	RSS-Gen Issue 5 Section 8.8	PASS	Refer to Appendix A for test data
Emissions in restricted frequency bands	RSS-Gen Issue 5 Section 8.9	PASS	Refer to Appendix B for test data
Duty cycle	ANSI C63.10:2013	PASS	Refer to Appendix C for test data
Emissions in non-restricted frequency bands	RSS-247 Issue 3 Section 5.5	PASS	Refer to Appendix D for test data
Radiated Emission Band Edge	RSS-Gen Issue 5 Section 8.10	PASS	Refer to Appendix E for test data
Fundamental emission output power	RSS-247 Issue 3 Section 5.4(d)	PASS	Refer to Appendix F for test data
DTS Bandwidth	RSS-Gen Issue 5 Section 6.7	PASS	Refer to Appendix G for test data
Power Spectral Density	RSS-247 Issue 3 Section 5.2(b)	PASS	Refer to Appendix H for test data
Antenna Requirement	RSS-Gen Issue 5 Section 6.8	PASS	---

3.4 Power setting in test

Mode	Channel	Frequency (MHz)	Power setting
Zigbee	11	2405	8
	18	2440	8
	26	2480	8

3.5 Test Matrix

Test item	Model: 9290031516A		
	1(#1)	2(#2)	3()
AC Power Line Conducted Emission	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Emissions in restricted frequency bands	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Duty cycle	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Emissions in non-restricted frequency bands	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Radiated Emission Band Edge	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Fundamental emission output power	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
DTS Bandwidth	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Power Spectral Density	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Antenna Requirement	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>

Note: The only difference between sample #1 and sample #2 is whether to keep the original antenna, sample #1 is a conduction test product that removes the original antenna and is equipped with SMA wires, and sample #2 is a complete product that retains the original antenna.

Note: We have evaluated both lamp chimney, only the worst data was shown in report.

3.6 Test Facility

USA	:	FCC Designation Number: CN1199
CA	:	ISED CAB identifier: CN0040

4 TEST RESULTS

4.1 AC Power Line Conducted Emission

VERDICT: PASS

4.1.1 Limit

Standard	FCC Part 15 Subpart C Paragraph 15.207	
Frequency range [MHz]	Limit: QP [dB(μ V) ¹⁾]	Limit: AV [dB(μ V) ¹⁾]
0,15 - 0,50	66 - 56 ²⁾	56 - 46 ²⁾
0,50 - 5,0	56	46
5,0 - 30	60	50


¹⁾ At the transition frequency, the lower limit applies.

²⁾ The limit decreases linearly with the logarithm of the frequency.

NOTE 1: The exclusion band for transmitters shall be considered for transmitters operating at frequencies below 30 MHz.

NOTE 2: Where the AC output port is directly connected (or via a circuit breaker) to the AC power input port of the EUT the AC power output port need not to be tested.

4.1.2 Test Setup

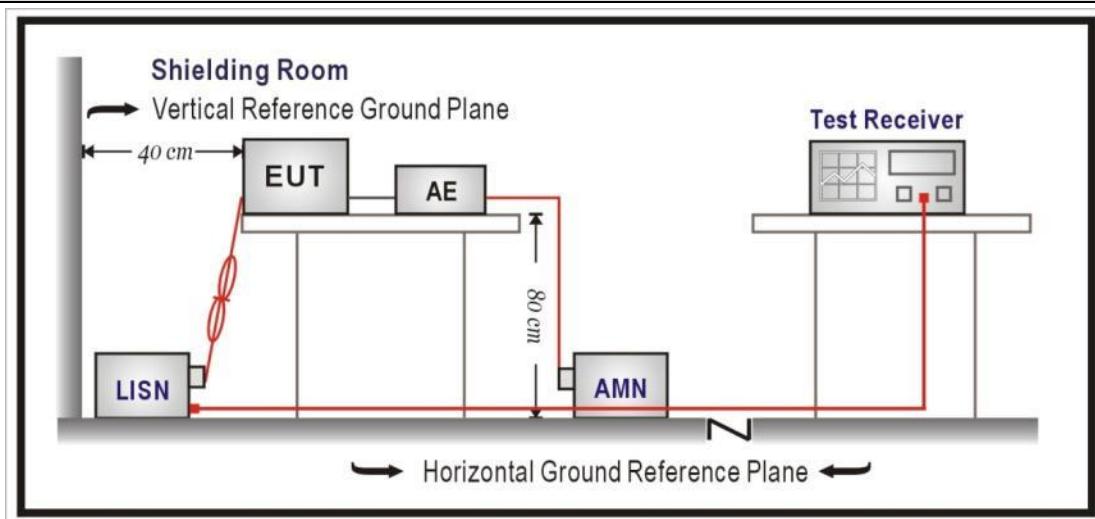

4.1.3 Test Procedure

	References Rule	Chapter	Item
<input checked="" type="checkbox"/>	ANSI C63.10-2013	6.2	Standard test method for ac power-line conducted emissions from unlicensed wireless devices

4.2 Emissions in restricted frequency bands**VERDICT: PASS****4.2.1 Limit**

Standard	FCC Part 15 Subpart C Paragraph 15.207
----------	--

Restricted Bands of operation

Frequency (MHz)	Frequency (MHz)	Frequency (MHz)	Frequency (GHz)
0.090 – 0.110	16.42 – 16.423	399.9 – 410	4.5 – 5.15
0.495 – 0.505	16.69475 – 16.69525	608 – 614	5.35 – 5.46
2.1735 – 2.1905	16.80425 – 16.80475	960 – 1240	7.25 – 7.75
4.125 – 4.128	25.5 – 25.67	1300 – 1427	8.025 – 8.5
4.17725 – 4.17775	37.5 – 38.25	1435 – 1626.5	9.0 – 9.2
4.20725 – 4.20775	73 – 74.6	1645.5 – 1646.5	9.3 – 9.5
6.215 – 6.218	74.8 – 75.2	1660 – 1710	10.6 – 12.7
6.26775 – 6.26825	108 – 121.94	1718.8 – 1722.2	13.25 – 13.4
6.31175 – 6.31225	123 – 138	2200 – 2300	14.47 – 14.5
8.291 – 8.294	149.9 – 150.05	2310 – 2390	15.35 – 16.2
8.362 – 8.366	156.52475 – 156.52525	2483.5 – 2500	17.7 – 21.4
8.37625 – 8.38675	156.7 – 156.9	2690 – 2900	22.01 – 23.12
8.81425 – 8.81475	162.0125 – 167.17	3260 – 3267	23.6 – 24.0
12.29 – 12.293	167.72 – 173.2	3332 – 3339	31.2 – 31.8
12.51975 – 12.52025	240 – 285	3345.8 – 3358	36.43 – 36.5
12.57675 – 12.57725	322 – 335.4	3600 – 4400	
13.36 – 13.41			

Restricted Bands of operation for IC

0.090 - 0.110	13.36 - 13.41	960 - 1427	9.0 - 9.2
0.495 - 0.505	16.42 - 16.423	1435 - 1626.5	9.3 - 9.5
2.1735 - 2.1905	16.69475 - 16.69525	1645.5 - 1646.5	10.6 - 12.7
3.020 - 3.026	16.80425 - 16.80475	1660 - 1710	13.25 - 13.4
4.125 - 4.128	25.5 - 25.67	1718.8 - 1722.2	14.47 - 14.5
4.17725 - 4.17775	37.5 - 38.25	2200 - 2300	15.35 - 16.2
4.20725 - 4.20775	73 - 74.6	2310 - 2390	17.7 - 21.4
5.677 - 5.683	74.8 - 75.2	2483.5 - 2500	22.01 - 23.12
6.215 - 6.218	108 - 138	2655 - 2900	23.6 - 24.0
6.26775 - 6.26825	149.9 - 150.05	3260 - 3267	31.2 - 31.8
6.31175 - 6.31225	156.52475 - 156.52525	3332 - 3339	36.43 - 36.5
8.291 - 8.294	156.7 - 156.9	3345.8 - 3358	Above 38.6
8.362 - 8.366	162.0125 - 167.17	3500 - 4400	
8.37625 - 8.38675	167.72 - 173.2	4500 - 5150	
8.41425 - 8.41475	240 - 285	5350 - 5460	
12.29 - 12.293	322 - 335.4	7250 - 7750	
12.51975 - 12.52025	399.9 - 410	8025 - 8500	
12.57675 - 12.57725	608 - 614	--	

Restricted Band Emissions Limit


Frequency (MHz)	Field strength (μ V/m)	Field strength (dB μ V/m)	Measurement distance (m)
0.009 - 0.49	2400/F(kHz)	48.5 – 13.8	300(Note 1)
0.49 - 1.705	24000/F(kHz)	33.8 - 23	30(Note 1)
1.705 - 30	30	29.5	30(Note 1)
30 - 88	100	40	3(Note 2)
88 - 216	150	43.5	3(Note 2)
216 - 960	200	46	3(Note 2)
Above 960	500	54	3(Note 2)

Note 1: At frequencies below 30 MHz, measurements may be performed at a distance closer than that specified in the regulations; however, an attempt should be made to avoid making measurements in the near field. Pending the development of an appropriate measurement procedure for measurements performed below 30 MHz, when performing measurements at a closer distance than specified, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade).


Note 2: At frequencies at or above 30 MHz, measurements may be performed at a distance other than what is specified provided: measurements are not made in the near field except where it can be shown that near field measurements are appropriate due to the characteristics of the device; and it can be demonstrated that the signal levels needed to be measured at the distance employed can be detected by the measurement equipment. Measurements shall not be performed at a distance greater than 30 meters unless it can be further demonstrated that measurements at a distance of 30 meters or less are impractical. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse linear-distance for field strength measurements; inverse-linear-distance-squared for power density measurements).

4.2.2 Test Setup


Below 30MHz Test Setup:

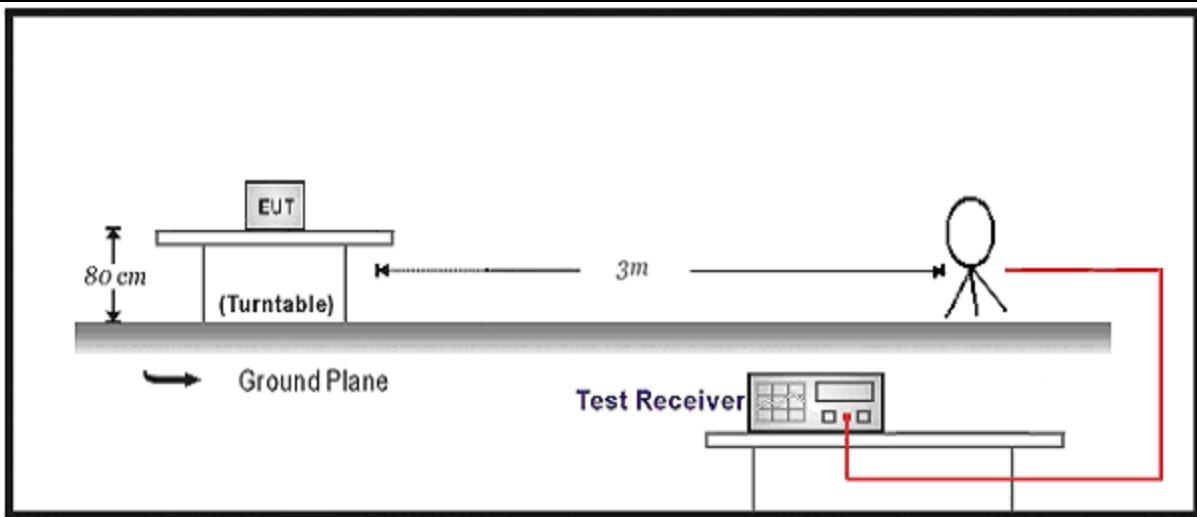

30MHz-1GHz Test Setup:

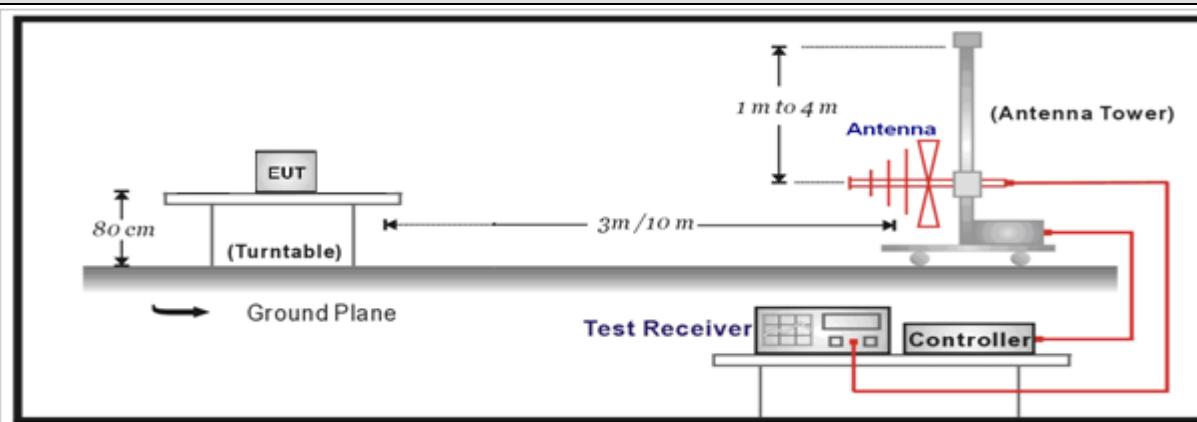

Above 1GHz Test Setup:

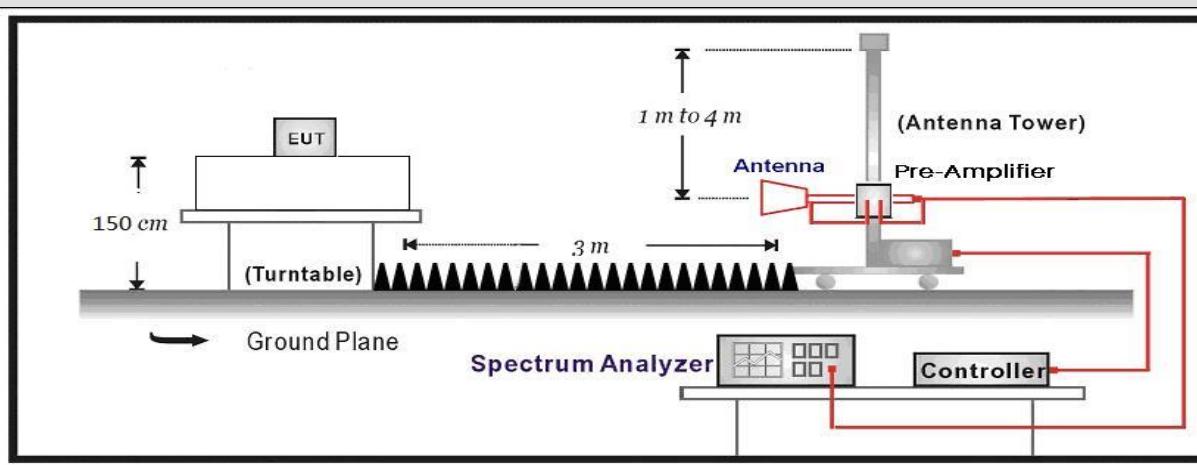

4.2.3 Test Procedure

	References Rule	Chapter	Description
<input checked="" type="checkbox"/>	ANSI C63.10	11.12	Emissions in restricted frequency bands
	<input checked="" type="checkbox"/> ANSI C63.10	11.12.1	Radiated emission measurements
	<input checked="" type="checkbox"/> ANSI C63.10	11.12.2.7	Radiated spurious emission test
	<input checked="" type="checkbox"/> ANSI C63.10	6.4	Radiated emissions from unlicensed wireless devices below 30 MHz
	<input checked="" type="checkbox"/> ANSI C63.10	6.5	Radiated emissions from unlicensed wireless devices in the frequency range of 30 MHz to 1000 MHz
	<input checked="" type="checkbox"/> ANSI C63.10	6.6	Radiated emissions from unlicensed wireless devices above 1 GHz

4.3 Emissions in non-restricted frequency band

VERDICT: PASS


4.3.1 Limit

Standard	FCC Part 15 Subpart C Paragraph 15.247(d)
RF Output power (Detection methods)	Limit(dB)
RF Output power(Average detector)	30dBc(Note1)
RF Output power(PK detector)	20dBc(Note2)

Note 1: If maximum conducted (average) output power was used to demonstrate compliance as described in 9.2, then the peak power in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 30 dB relative to the maximum in-band peak PSD level in 100 kHz (i.e., 30 dBc).

Note 2: If the maximum peak conducted output power procedure was used, then the peak output power measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz (i.e., 20 dBc).

4.3.2 Test Setup

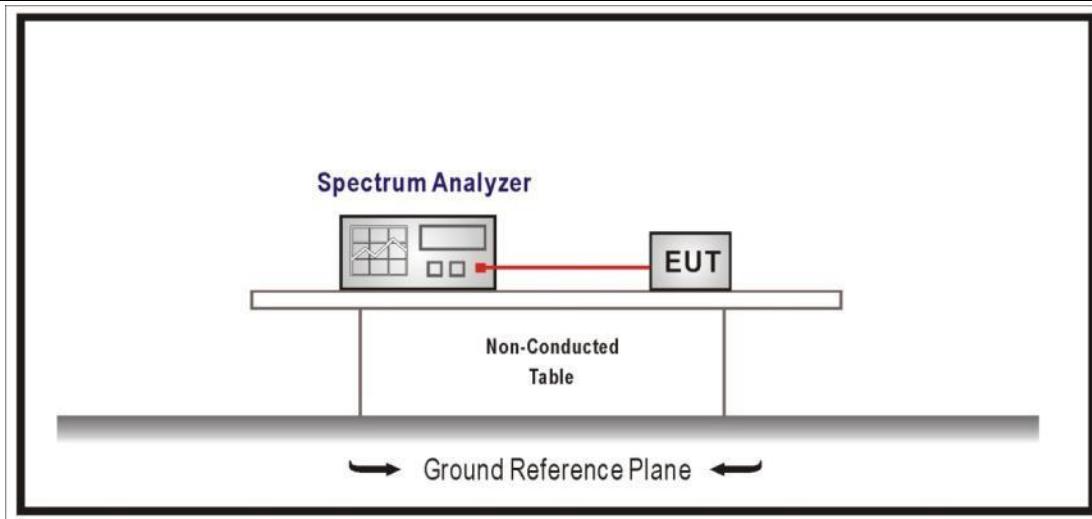


4.3.3 Test Procedure

References Rule	Chapter	Description
<input checked="" type="checkbox"/> ANSI C63.10	11.11	Emissions in non-restricted frequency bands
<input checked="" type="checkbox"/> ANSI C63.10	11.11.1	General
<input checked="" type="checkbox"/> ANSI C63.10	11.11.2	Reference level measurement
<input checked="" type="checkbox"/> ANSI C63.10	11.11.3	Emission level measurement

4.4 Duty cycle**VERDICT: PASS****4.4.1 Limit**

N/A

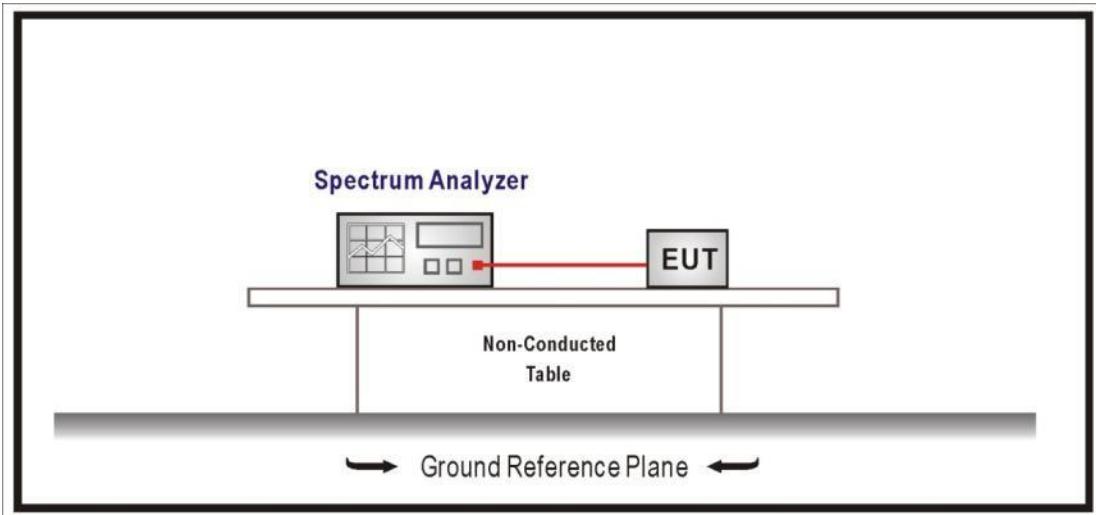4.4.2 Test Setup**4.4.3 Test Procedure**

References Rule	Chapter	Description
<input checked="" type="checkbox"/> ANSI C63.10	11.6	Duty cycle (D), transmission duration (T), and maximum power control level

4.5 Radiated Emission Band Edge

VERDICT: PASS


4.5.1 Limit

Standard		FCC Part 15 Subpart C Paragraph 15.247(d), 15.209		
Frequency bands (MHz)	Detector	Limit (dB μ V/m)	RBW (MHz)	Distance (m)
2310-2390 2483.5-2500	PK	74	1	3
	AV	54	1	3

Note: The field strength of emissions appearing within these frequency bands shall not exceed the limits.

4.5.2 Test Setup

Above 1GHz Test Setup:

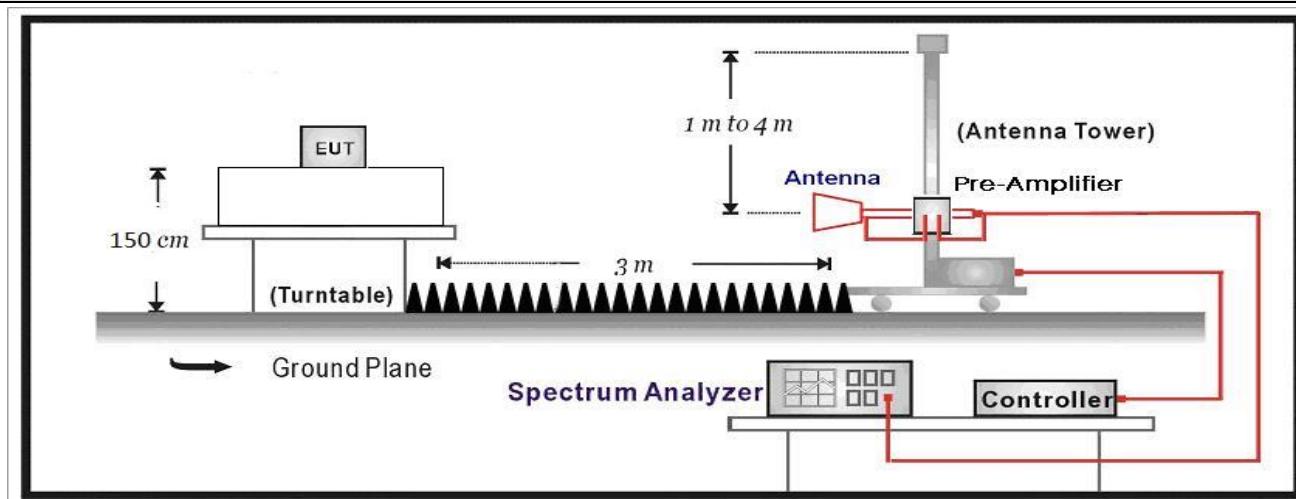


4.5.3 Test Procedure

	References Rule	Chapter	Description
<input checked="" type="checkbox"/>	ANSI C63.10	6.10	Band-edge testing
<input type="checkbox"/>	<input checked="" type="checkbox"/> ANSI C63.10	6.10.5	Restricted-band band-edge measurements
	<input type="checkbox"/> ANSI C63.10	6.10.6	Marker-delta method
<input checked="" type="checkbox"/>	ANSI C63.10	11.12	Emissions in restricted frequency bands
<input type="checkbox"/>	<input checked="" type="checkbox"/> ANSI C63.10	11.12.1	Radiated emission measurements
	<input checked="" type="checkbox"/> ANSI C63.10	11.12.2.7	Radiated spurious emission test
<input type="checkbox"/>	ANSI C63.10	6.4	Radiated emissions from unlicensed wireless devices below 30 MHz
<input type="checkbox"/>	ANSI C63.10	6.5	Radiated emissions from unlicensed wireless devices in the frequency range of 30 MHz to 1000 MHz
<input checked="" type="checkbox"/>	ANSI C63.10	6.6	Radiated emissions from unlicensed wireless devices above 1 GHz

4.6 DTS Bandwidth**VERDICT: PASS****4.6.1 Limit****Standard**

FCC Part 15 Subpart C Paragraph 15.247 (a)(2)

Systems using digital modulation techniques operate in the 2400-2483.5 MHz. The minimum 6 dB bandwidth shall be at least 500 kHz

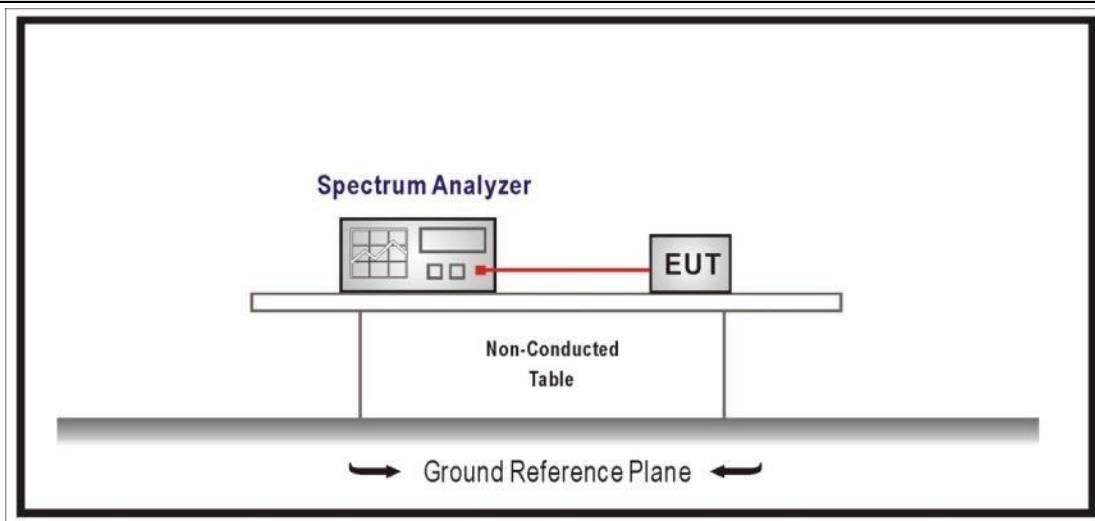4.6.2 Test Setup**4.6.3 Test Procedure**


	Reference Rule	Chapter	Description
<input checked="" type="checkbox"/>	ANSI C63.10	11.8	DTS bandwidth
<input type="checkbox"/>	ANSI C63.10	11.8.1	Option 1
	<input checked="" type="checkbox"/>	11.8.2	Option 2

4.7 Fundamental emission output power**VERDICT: PASS****4.7.1 Limit**

Standard		FCC Part 15 Subpart C Paragraph 15.247 (b)(3)
<input checked="" type="checkbox"/>	GTX <6dBi	Pout≤30dBm
<input type="checkbox"/>	GTX >6dBi	
<input type="checkbox"/>	Non-Fix point-point	Pout≤30-(GTX -6)
<input type="checkbox"/>	Fix point-point	Pout≤30-[(GTX-6)]/3
<input type="checkbox"/>	Point-to-multipoint	Pout≤30-(GTX-6)
<input type="checkbox"/>	Overlap Beams	Pout≤30-[(GTX-6)]/3
<input type="checkbox"/>	Aggregate power transmitted simultaneously on all beams	Pout≤30-[(GTX-6)]/3
<input type="checkbox"/>	single directional beam	Pout≤30-[(GTX-6)]/3+8dB

Note 1 : GTX directional gain of transmitting antennas.

Note 2 : Pout is maximum peak conducted output power .

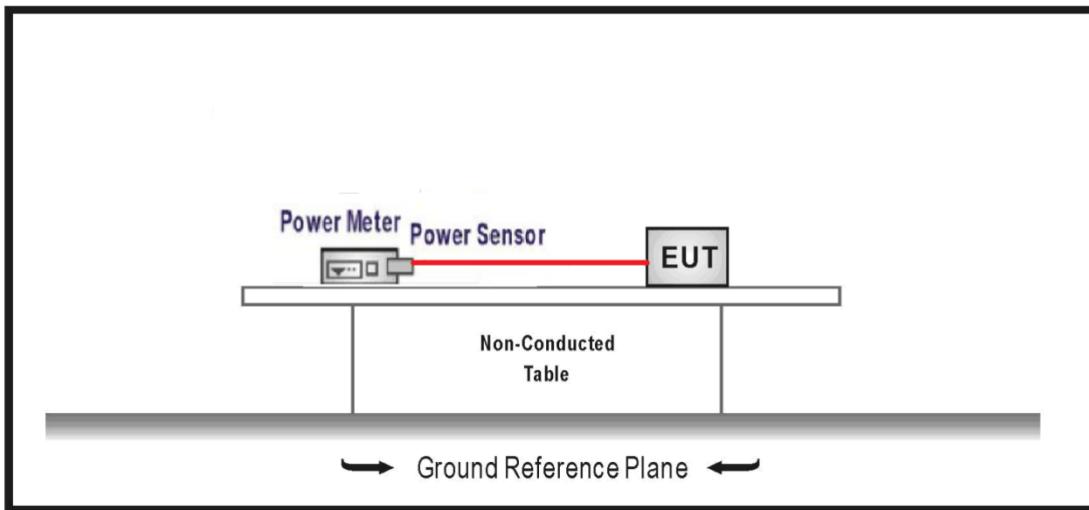
4.7.2 Test Setup

4.7.3 Test Procedure

	References Rule		Chapter	Description
<input checked="" type="checkbox"/>	ANSI C63.10		11.9	Fundamental emission output power
<input checked="" type="checkbox"/>	ANSI C63.10		11.9.1	Maximum peak conducted output power
	<input type="checkbox"/>	ANSI C63.10	11.9.1.1	RBW \geq DTS bandwidth
	<input type="checkbox"/>	ANSI C63.10	11.9.1.2	Integrated band power method
	<input type="checkbox"/>	ANSI C63.10	11.9.1.3	PKPM1 Peak power meter method
<input type="checkbox"/>	ANSI C63.10		11.9.2	Maximum conducted (average) output power
	<input type="checkbox"/>	ANSI C63.10	11.9.2.2	Measurement using a spectrum analyzer (SA)
	<input type="checkbox"/>	ANSI C63.10	11.9.2.2.2	Method AVGSA-1(Duty cycle $\geq 98\%$)
	<input type="checkbox"/>	ANSI C63.10	11.9.2.2.3	Method AVGSA-1A(Duty cycle $\geq 98\%$)
	<input type="checkbox"/>	ANSI C63.10	11.9.2.2.4	Method AVGSA-2(Duty cycle $\leq 98\%$)
	<input type="checkbox"/>	ANSI C63.10	11.9.2.2.5	Method AVGSA-2A(Duty cycle $\leq 98\%$)
	<input type="checkbox"/>	ANSI C63.10	11.9.2.2.4	Method AVGSA-3
	<input type="checkbox"/>	ANSI C63.10	11.9.2.2.5	Method AVGSA-3A
<input checked="" type="checkbox"/>	ANSI C63.10		11.9.2.3	Measurement using a power meter (PM)
	<input checked="" type="checkbox"/>	ANSI C63.10	11.9.2.3.1	Method AVGPM
	<input type="checkbox"/>	ANSI C63.10	11.9.2.3.2	Method AVGPM-G

4.8 Power Density**VERDICT: PASS****4.8.1 Limit:****Standard**

FCC Part 15 Subpart C Paragraph 15.247 (b)(3)

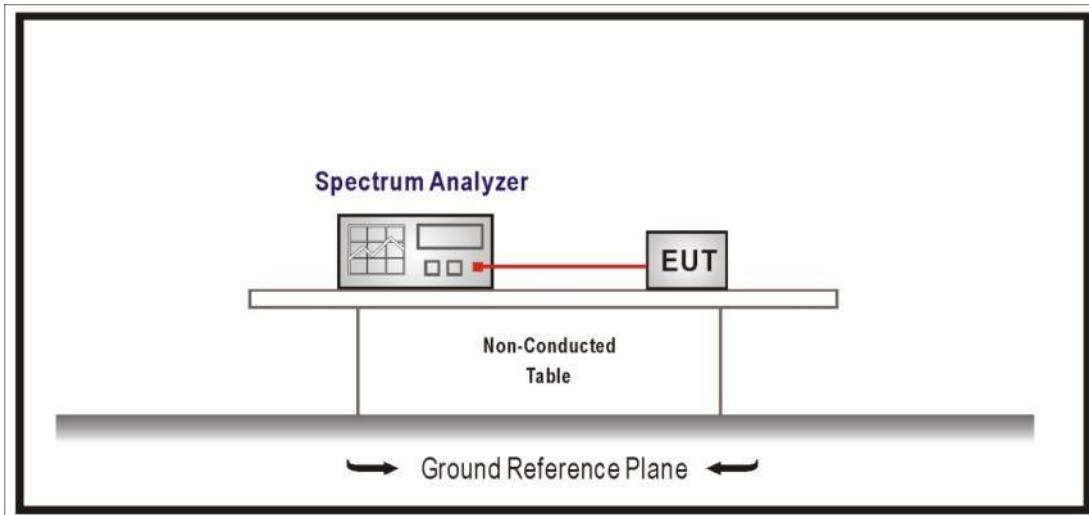Power Spectral Density $\leq 8\text{dBm}/3\text{kHz}$ **4.8.2 Test Setup****4.8.3 Test Procedure**

	References Rule	Chapter	Description
<input checked="" type="checkbox"/>	ANSI C63.10	11.10	Maximum power spectral density level in the fundamental emission
<input checked="" type="checkbox"/>	ANSI C63.10	11.10.2	Method PKPSD (peak PSD)
	ANSI C63.10	11.10.3	Method AVGPSD-1(Duty cycle $\geq 98\%$)
	ANSI C63.10	11.10.4	Method AVGPSD-1A(Duty cycle $\geq 98\%$)
	ANSI C63.10	11.10.5	Method AVGPSD-2(Duty cycle $< 98\%$)
	ANSI C63.10	11.10.6	Method AVGPSD-2A(Duty cycle $< 98\%$)
	ANSI C63.10	11.10.7	Method AVGPSD-3
	ANSI C63.10	11.10.8	Method AVGPSD-3A

4.9 Antenna Requirement**VERDICT: PASS****4.9.1 Limit:**

Standard	FCC Part 15 Subpart C Paragraph 15.203
-----------------	--

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §15.211, §15.213, §15.217, §15.219, or §15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

4.9.2 Antenna Connector Construction:

- | | |
|-------------------------------------|--|
| <input checked="" type="checkbox"/> | The use of a permanently attached antenna |
| <input type="checkbox"/> | The antenna use of a unique coupling to the intentional radiator |
| <input type="checkbox"/> | The use of a nonstandard antenna jack or electrical connector |


Please refer to the attached document "Internal Photograph" to show the antenna connector.

5 TEST SETUP PHOTO AND EUT PHOTO

Remark: The test setup photo and EUT Photo please see appendix.


Appendix A: AC Power Line Conducted Emission

Profile: 2420073R	Page No.: 27
Engineer: Pengchengyang	
Site: TR1	Time: 2024/01/17 - 08:59
Limit: FCC_Part 15.207_CE_AC Power	Margin: 0
Probe: ENV216_101189(0.009-30MHz)	Polarity: Line
EUT: LED lamp	Power: 120Vac/60Hz
Note: Mode1: Transmit by Zigbee	

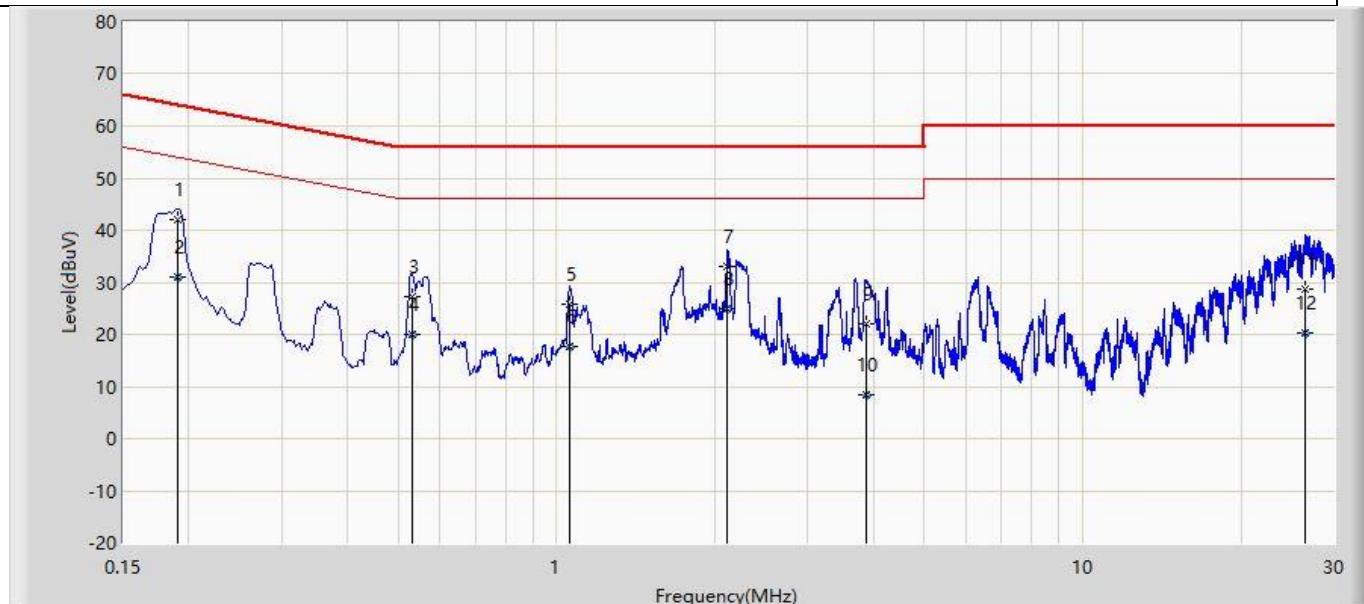

No	Mark	Frequency (MHz)	Measure Level (dBuV)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV)	Factor (dB)	Type
1		0.191	42.021	32.398	-21.994	64.015	9.623	QP
2		0.191	31.144	21.521	-22.871	54.015	9.623	AV
3		0.532	27.230	17.593	-28.770	56.000	9.638	QP
4		0.532	20.071	10.434	-25.929	46.000	9.638	AV
5		1.059	25.787	16.116	-30.213	56.000	9.671	QP
6		1.059	17.602	7.931	-28.398	46.000	9.671	AV
7		2.112	33.162	23.465	-22.838	56.000	9.698	QP
8	*	2.112	25.045	15.347	-20.955	46.000	9.698	AV
9		3.887	21.901	12.163	-34.099	56.000	9.737	QP
10		3.887	8.309	-1.429	-37.691	46.000	9.737	AV
11		26.430	28.632	18.553	-31.368	60.000	10.078	QP
12		26.430	20.246	10.168	-29.754	50.000	10.078	AV

Profile: 2420073R	Page No.: 28
Engineer: Pengchengyang	
Site: TR1	Time: 2024/01/17 - 09:00
Limit: FCC_Part 15.207_CE_AC Power	Margin: 0
Probe: ENV216_101189(0.009-30MHz)	Polarity: Neutral
EUT: LED lamp	Power: 120Vac/60Hz
Note: Mode1: Transmit by Zigbee	

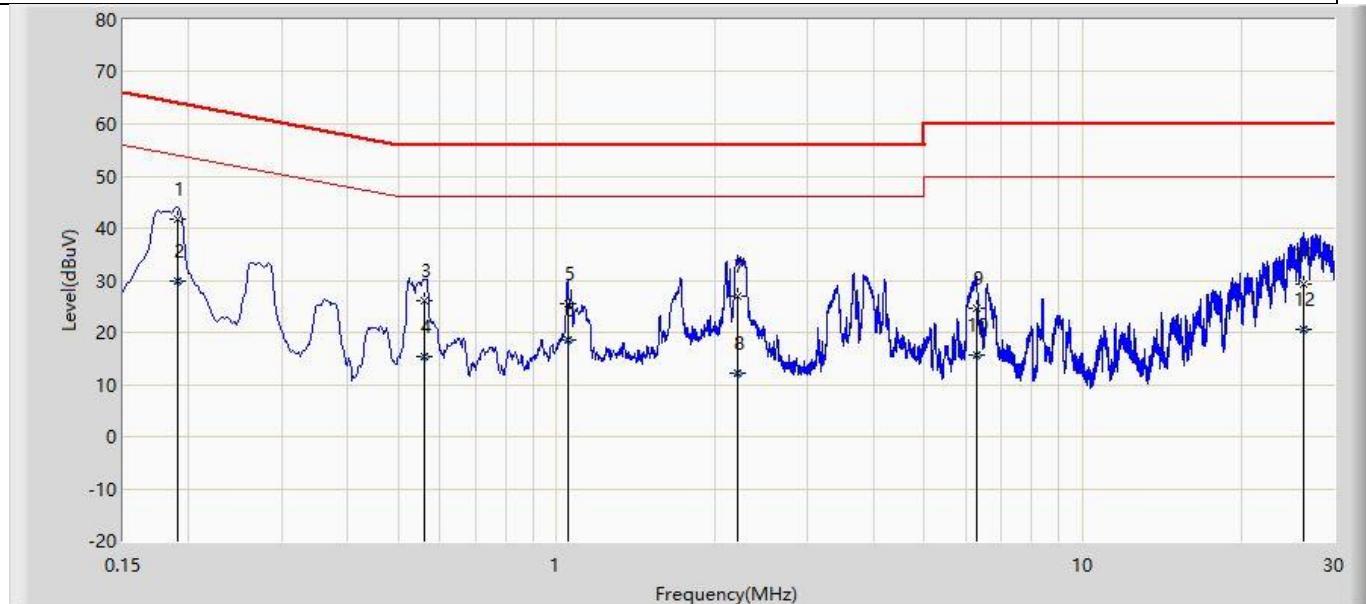


No	Mark	Frequency (MHz)	Measure Level (dBuV)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV)	Factor (dB)	Type
1	*	0.191	41.770	32.138	-22.245	64.015	9.632	QP
2		0.191	29.749	20.117	-24.266	54.015	9.632	AV
3		0.559	26.085	16.436	-29.915	56.000	9.649	QP
4		0.559	15.359	5.710	-30.641	46.000	9.649	AV
5		1.050	25.518	15.846	-30.482	56.000	9.671	QP
6		1.050	18.422	8.751	-27.578	46.000	9.671	AV
7		2.211	27.019	17.317	-28.981	56.000	9.702	QP
8		2.211	12.248	2.546	-33.752	46.000	9.702	AV
9		6.272	24.506	14.706	-35.494	60.000	9.800	QP
10		6.272	15.642	5.842	-34.358	50.000	9.800	AV
11		26.203	29.292	19.179	-30.708	60.000	10.113	QP
12		26.203	20.573	10.460	-29.427	50.000	10.113	AV

Note:

1. " * ", means this data is the worst emission level.
2. Measurement Level = Reading Level + Factor(Probe+Cable+Amp). Test Photograph.


Appendix B: Emissions in restricted frequency bands

Profile: 2420073R	Page No.: 31
Engineer: Pengchengyang	
Site: AC5	Time: 2024/02/22 - 08:28
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: LED lamp	Power: 120Vac/60Hz
Note: Mode 1 : Transmit at 2405MHz by Zigbee	

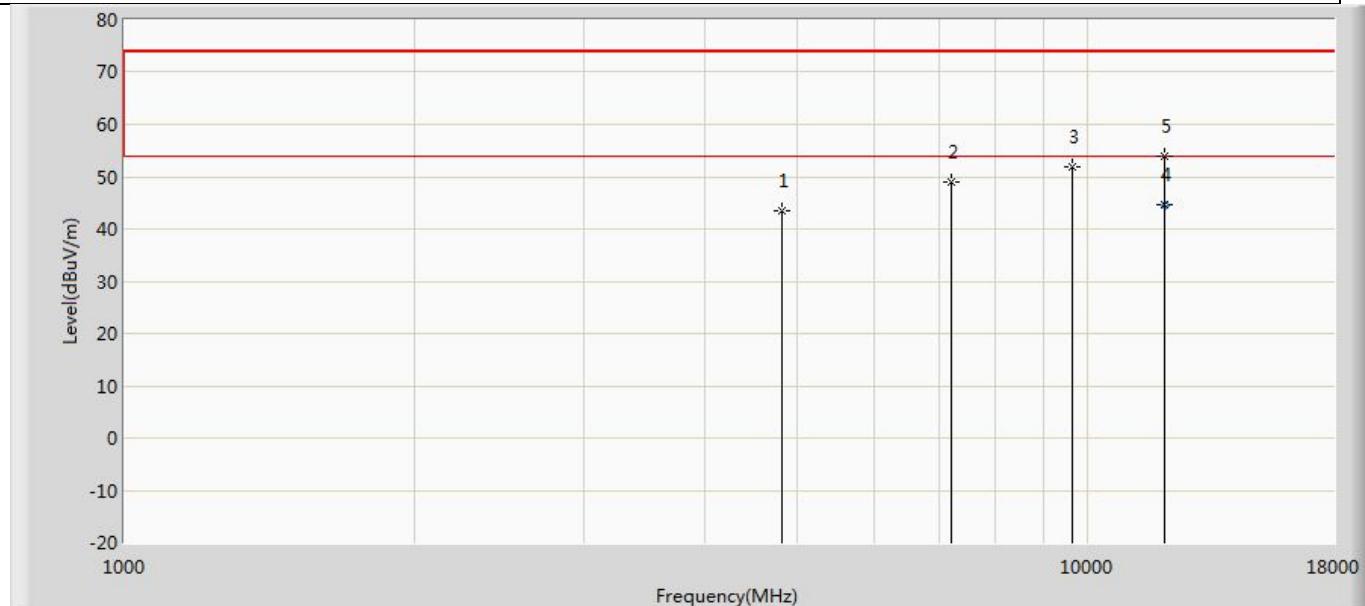


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4810.000	43.554	55.426	-30.446	74.000	-11.873	PK
2		7205.000	49.072	55.222	-24.928	74.000	-6.150	PK
3		9620.000	51.802	55.557	-22.198	74.000	-3.755	PK
4	*	12021.800	44.515	43.740	-9.485	54.000	0.775	AV
5		12025.000	53.970	52.893	-20.030	74.000	1.077	PK

Profile: 2420073R	Page No.: 32
Engineer: Pengchengyang	
Site: AC5	Time: 2024/02/22 - 08:28
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: LED lamp	Power: 120Vac/60Hz
Note: Mode 1 : Transmit at 2405MHz by Zigbee	

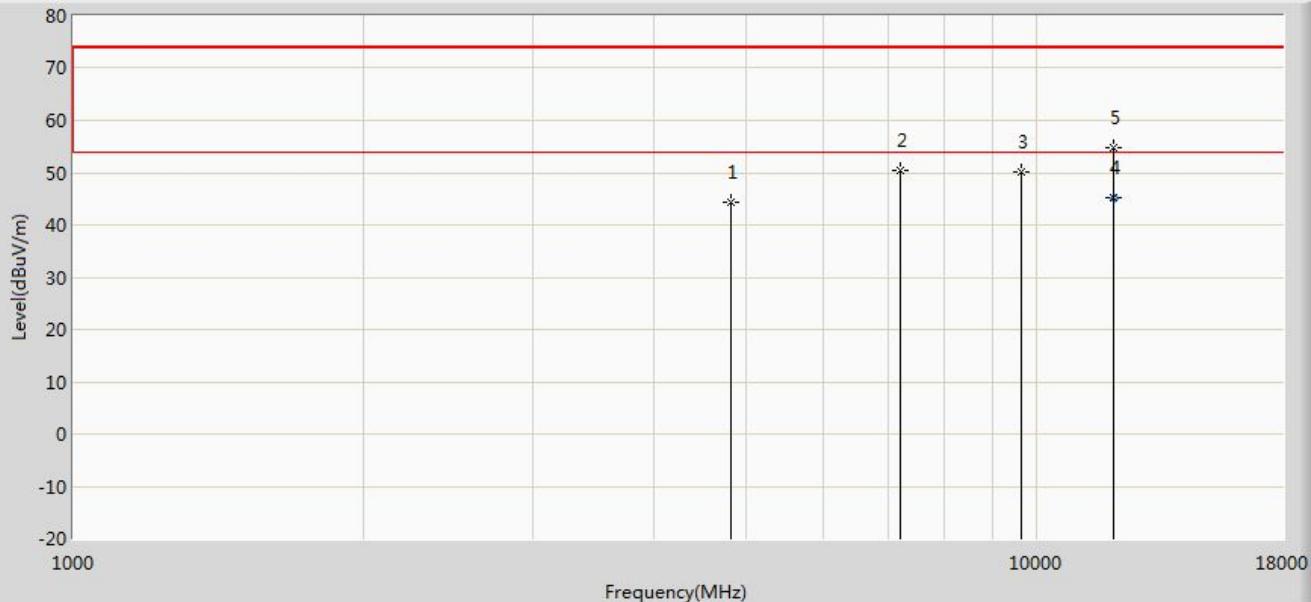


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4810.000	44.466	56.338	-29.534	74.000	-11.873	PK
2		7205.000	50.564	56.714	-23.436	74.000	-6.150	PK
3		9620.000	50.281	54.036	-23.719	74.000	-3.755	PK
4	*	12022.000	45.074	44.280	-8.926	54.000	0.794	AV
5		12025.000	54.813	53.736	-19.187	74.000	1.077	PK

Profile: 2420073R	Page No.: 33
Engineer: Pengchengyang	
Site: AC5	Time: 2024/02/22 - 08:28
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: LED lamp	Power: 120Vac/60Hz
Note: Mode 1 : Transmit at 2440MHz by Zigbee	

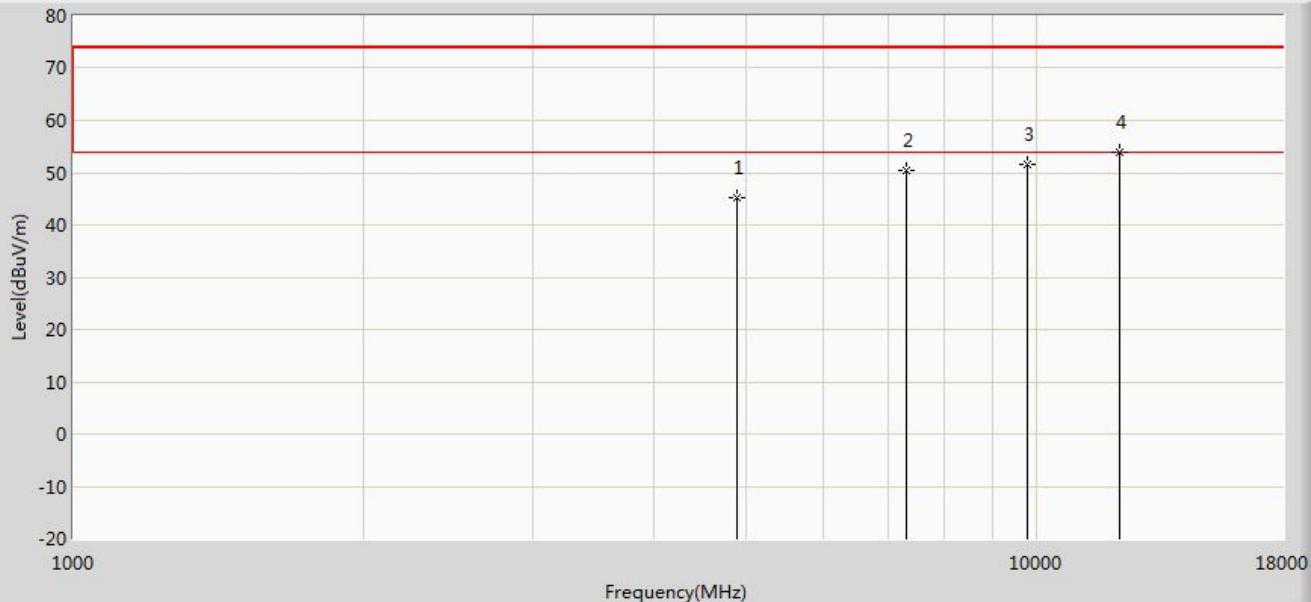


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4880.000	45.236	55.840	-28.764	74.000	-10.603	PK
2		7324.000	50.482	57.317	-23.518	74.000	-6.835	PK
3		9760.000	51.603	54.476	-22.397	74.000	-2.874	PK
4	*	12200.000	53.933	53.012	-20.067	74.000	0.921	PK

Profile: 2420073R	Page No.: 34
Engineer: Pengchengyang	
Site: AC5	Time: 2024/02/22 - 08:28
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: LED lamp	Power: 120Vac/60Hz
Note: Mode 1 : Transmit at 2440MHz by Zigbee	

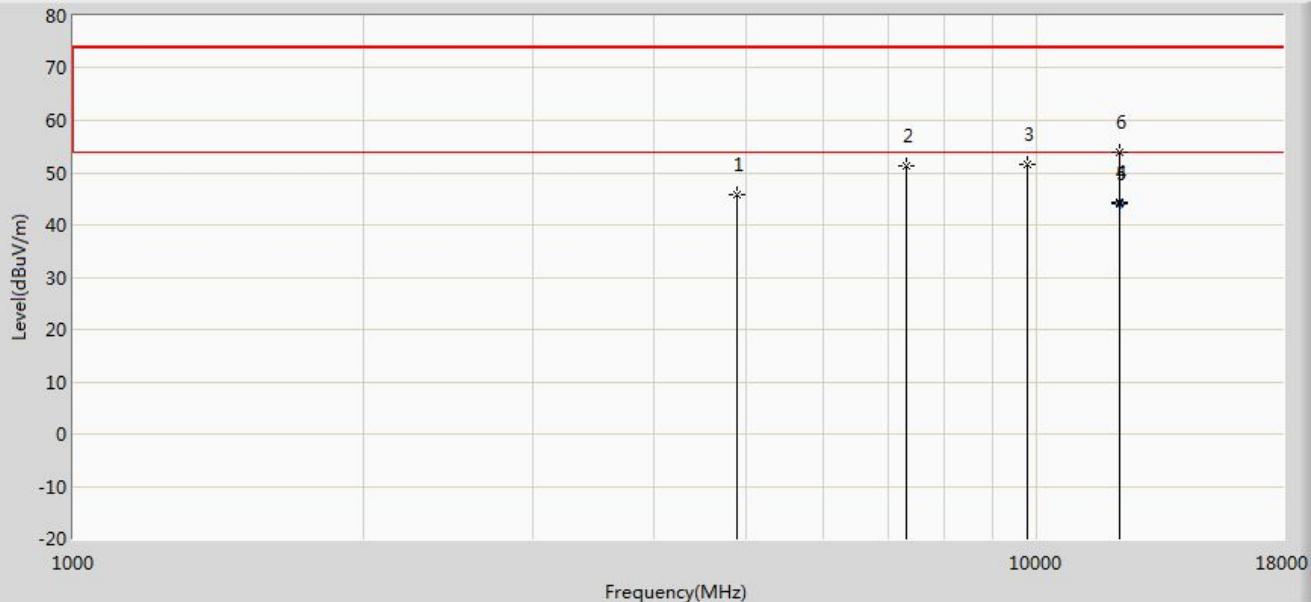


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4880.000	45.656	56.260	-28.344	74.000	-10.603	PK
2		7324.000	51.191	58.026	-22.809	74.000	-6.835	PK
3		9760.000	51.451	54.324	-22.549	74.000	-2.874	PK
4	*	12196.980	44.464	43.580	-9.536	54.000	0.884	AV
5		12197.080	44.195	43.310	-9.805	54.000	0.885	AV
6		12200.000	54.043	53.122	-19.957	74.000	0.921	PK

Profile: 2420073R	Page No.: 35
Engineer: Pengchengyang	
Site: AC5	Time: 2024/02/22 - 08:28
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: LED lamp	Power: 120Vac/60Hz
Note: Mode 1 : Transmit at 2480MHz by Zigbee	

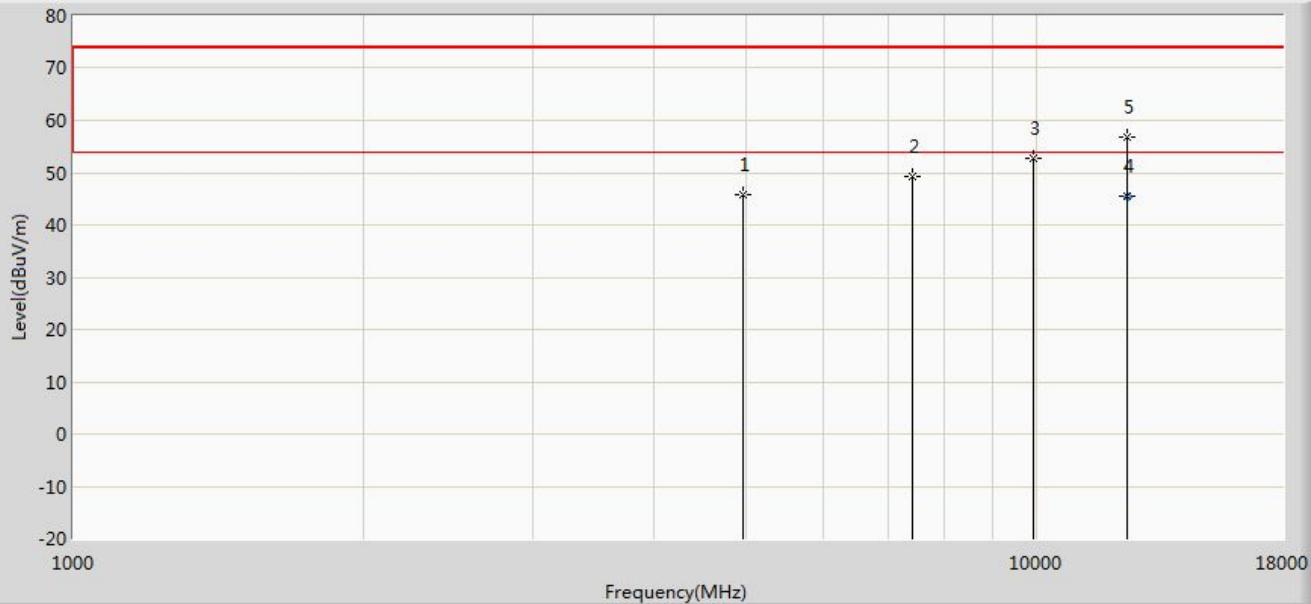

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4960.000	45.902	56.608	-28.098	74.000	-10.707	PK
2		7440.000	49.167	55.946	-24.833	74.000	-6.779	PK
3		9920.000	52.885	54.707	-21.115	74.000	-1.821	PK
4	*	12402.440	45.630	42.860	-8.370	54.000	2.769	AV
5		12407.000	56.721	53.772	-17.279	74.000	2.949	PK

Profile: 2420073R	Page No.: 36
Engineer: Pengchengyang	
Site: AC5	Time: 2024/02/22 - 08:28
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: LED lamp	Power: 120Vac/60Hz
Note: Mode 1 : Transmit at 2480MHz by Zigbee	

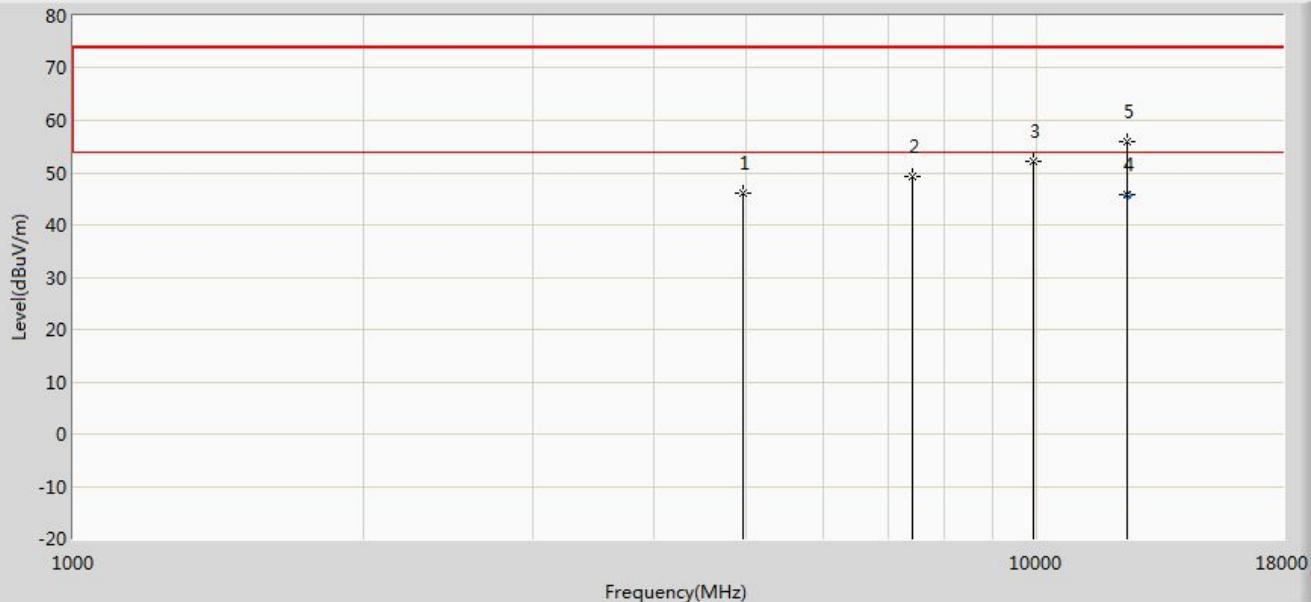


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4960.000	45.986	56.692	-28.014	74.000	-10.707	PK
2		7440.000	49.196	55.975	-24.804	74.000	-6.779	PK
3		9920.000	52.208	54.030	-21.792	74.000	-1.821	PK
4	*	12402.840	45.825	43.040	-8.175	54.000	2.786	AV
5		12407.000	55.834	52.885	-18.166	74.000	2.949	PK

Note:

1. The test frequency range, 9kHz~30MHz and Above 18GHz worst case are at least 6dB below the limits, therefore no data appear in the report.
2. " * ", means this data is the worst emission level.
3. Measurement Level = Reading Level + Factor(Probe+Cable+Amp).


The worst case of Radiated Emission below 1GHz:

Profile: 2420073R	Page No.: 59
Engineer: Pengchengyang	
Site: AC2	Time: 2024/01/17 - 08:17
Limit: FCC_Part 15.209_RE (3m)	Margin: 0
Probe: CBL6112D_27613(30-1000MHz)	Polarity: Horizontal
EUT: LED lamp	Power: 120Vac/60Hz
Note: Mode 1 : Transmit at 2405MHz by Zigbee	

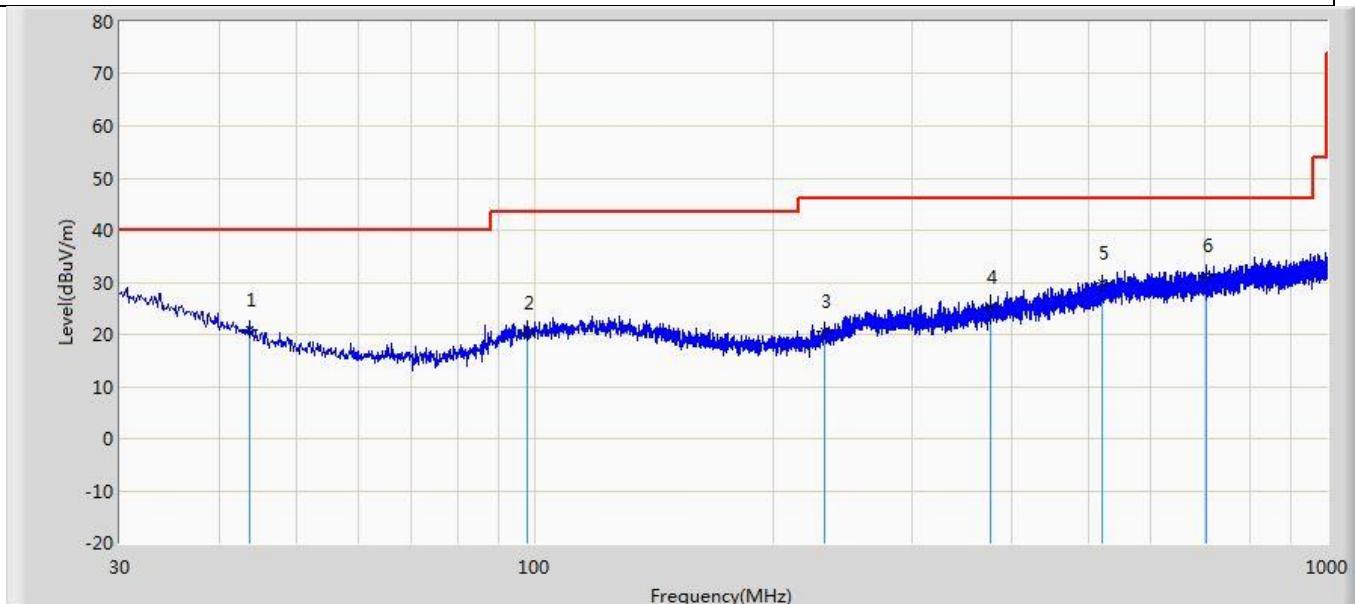

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		43.701	20.970	3.330	-19.030	40.000	17.641	QP
2		97.779	20.146	2.562	-23.354	43.500	17.585	QP
3		232.366	20.531	2.636	-25.469	46.000	17.894	QP
4		376.047	25.260	2.445	-20.740	46.000	22.815	QP
5		521.184	29.834	3.580	-16.166	46.000	26.254	QP
6	*	704.393	31.330	3.518	-14.670	46.000	27.813	QP

Profile: 2420073R	Page No.: 60
Engineer: Pengchengyang	
Site: AC2	Time: 2024/01/17 - 08:17
Limit: FCC_Part 15.209_RE (3m)	Margin: 0
Probe: CBL6112D_27613(30-1000MHz)	Polarity: Vertical
EUT: LED lamp	Power: 120Vac/60Hz
Note: Mode 1 : Transmit at 2405MHz by Zigbee	

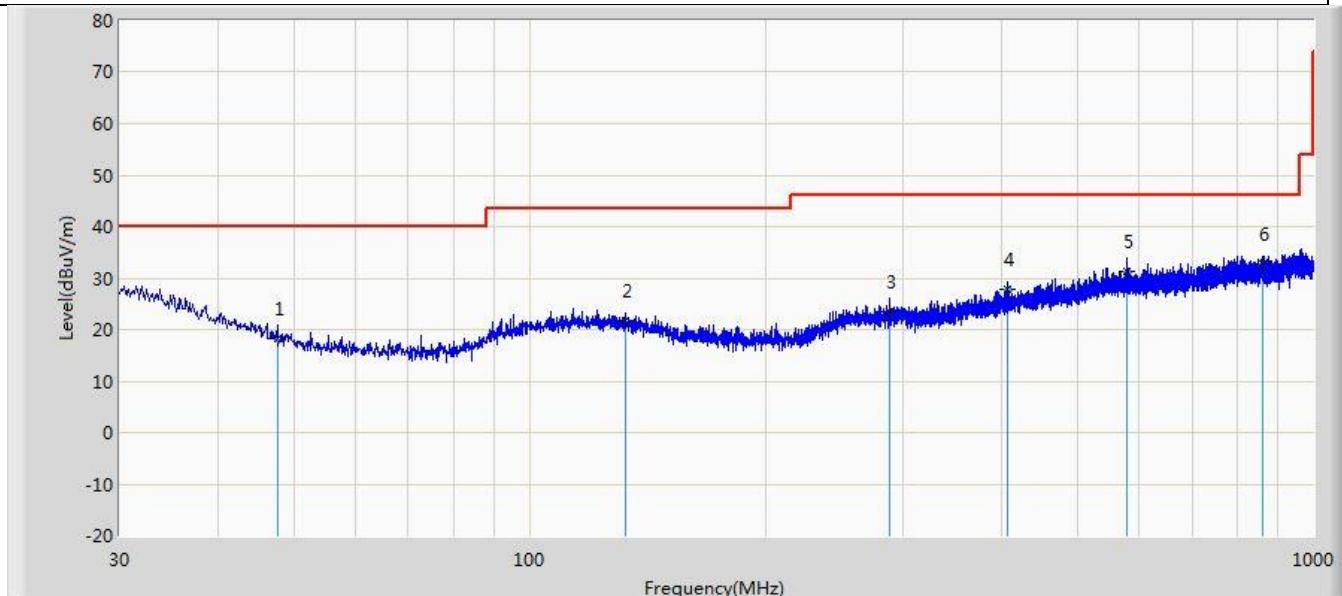

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		47.702	18.188	2.394	-21.812	40.000	15.795	QP
2		132.456	21.731	2.877	-21.769	43.500	18.854	QP
3		287.777	23.479	3.016	-22.521	46.000	20.462	QP
4		407.087	27.820	4.039	-18.180	46.000	23.781	QP
5		577.929	31.388	4.241	-14.612	46.000	27.147	QP
6	*	859.956	32.820	3.466	-13.180	46.000	29.354	QP

Note:

1. All Readings below 1GHz are Quasi-Peak, above are performed with peak and/or average measurements as necessary.
2. " * ", means this data is the worst emission level.
3. Measurement Level = Reading Level + Factor(Probe+Cable+Amp).

Appendix C: Duty cycle

TestMode	Frequency[MHz]	ON Time [ms]	Period [ms]	Duty Cycle [%]
Mode 1	2405	N/A	N/A	100
	2440	N/A	N/A	100
	2480	N/A	N/A	100

TEST GRAPHS:

ZIGB_Ant1_2405



ZIGB_Ant1_2440



ZIGB_Ant1_2480



Appendix D: Emissions in non-restricted frequency bands

Test Result for Band edge:

TestMode	Frequency [MHz]	RefLevel[dBm]	Result[dBm]	Limit[dBm]	Verdict
Mode 1	2405	4.55	-50.56	≤-15.45	PASS
	2480	4.41	-45.07	≤-15.59	PASS

Test Result for Spurious Emission:

TestMode	Frequency [MHz]	FreqRange [MHz]	RefLevel [dBm]	Result[dBm]	Limit[dBm]	Verdict
Mode 1	2405	30~1000	4.55	-67.11	≤-15.45	PASS
		1000~3000	4.55	-64.86	≤-15.45	PASS
		3000~5000	4.55	-58.59	≤-15.45	PASS
		5000~7000	4.55	-67.85	≤-15.45	PASS
		7000~9000	4.55	-66.39	≤-15.45	PASS
		9000~11000	4.55	-66.65	≤-15.45	PASS
		11000~13000	4.55	-62.23	≤-15.45	PASS
		13000~15000	4.55	-63.78	≤-15.45	PASS
		15000~17000	4.55	-52.62	≤-15.45	PASS
		17000~19000	4.55	-61.88	≤-15.45	PASS
		19000~21000	4.55	-61.28	≤-15.45	PASS
		21000~23000	4.55	-49.88	≤-15.45	PASS
		23000~25000	4.55	-58.61	≤-15.45	PASS
Mode 1	2440	30~1000	4.38	-67.69	≤-15.62	PASS
		1000~3000	4.38	-64.33	≤-15.62	PASS
		3000~5000	4.38	-60.5	≤-15.62	PASS
		5000~7000	4.38	-67.59	≤-15.62	PASS
		7000~9000	4.38	-67.02	≤-15.62	PASS
		9000~11000	4.38	-65.47	≤-15.62	PASS
		11000~13000	4.38	-59.6	≤-15.62	PASS
		13000~15000	4.38	-64.81	≤-15.62	PASS
		15000~17000	4.38	-64.01	≤-15.62	PASS
		17000~19000	4.38	-53.03	≤-15.62	PASS
		19000~21000	4.38	-62.05	≤-15.62	PASS
		21000~23000	4.38	-57.43	≤-15.62	PASS
Mode 1	2480	30~1000	4.41	-67.2	≤-15.59	PASS
		1000~3000	4.41	-64.69	≤-15.59	PASS
		3000~5000	4.41	-64.5	≤-15.59	PASS
		5000~7000	4.41	-67.76	≤-15.59	PASS
		7000~9000	4.41	-66.59	≤-15.59	PASS
		9000~11000	4.41	-66.67	≤-15.59	PASS
		11000~13000	4.41	-54.52	≤-15.59	PASS
		13000~15000	4.41	-64.65	≤-15.59	PASS
		15000~17000	4.41	-64.33	≤-15.59	PASS
		17000~19000	4.41	-50.63	≤-15.59	PASS
		19000~21000	4.41	-61.75	≤-15.59	PASS

		21000~23000	4.41	-54.34	≤-15.59	PASS
		23000~25000	4.41	-58.09	≤-15.59	PASS


Test Graphs for Reference level




ZIGB-Ant1-2405-PASS




ZIGB-Ant1-2440-PASS

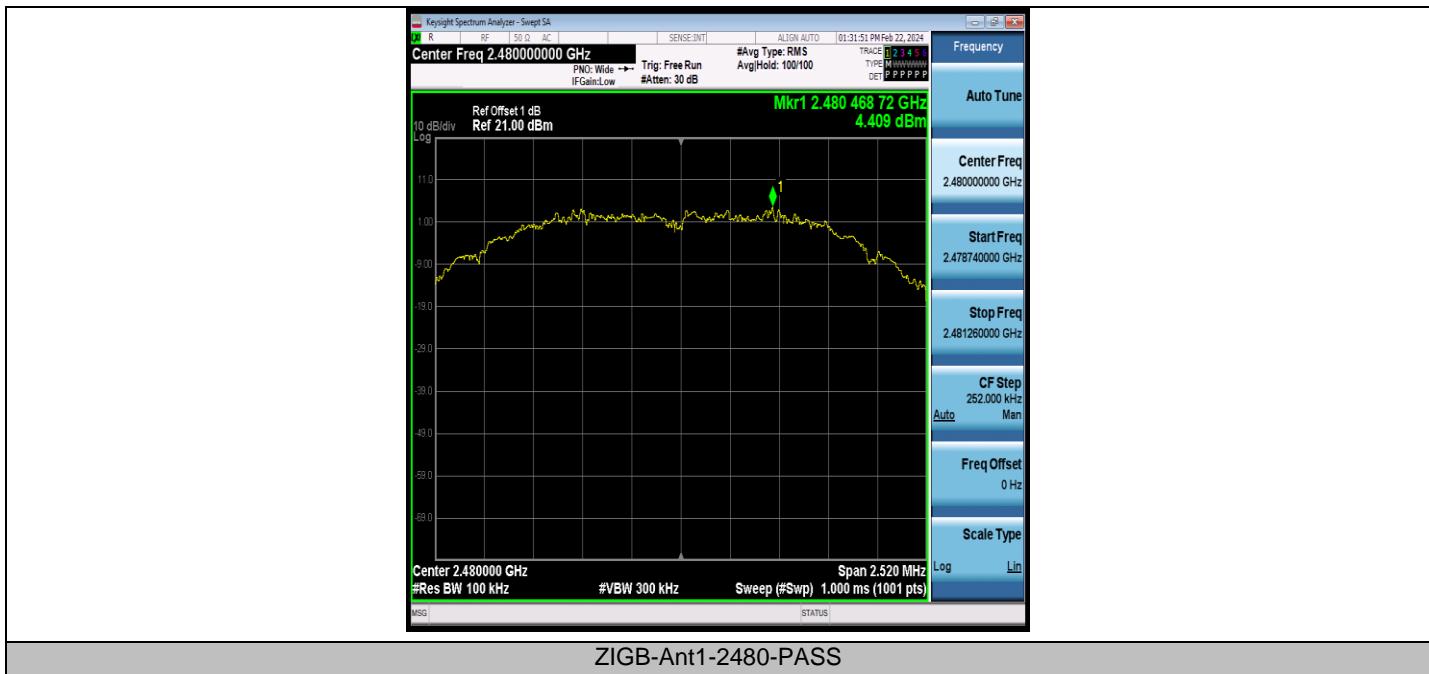

Test Graphs for Band edge

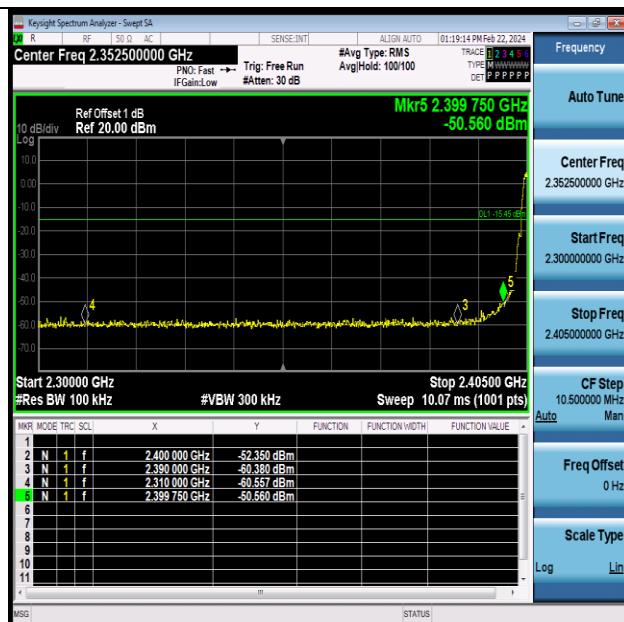

ZIGB-Ant1-2405-PASS

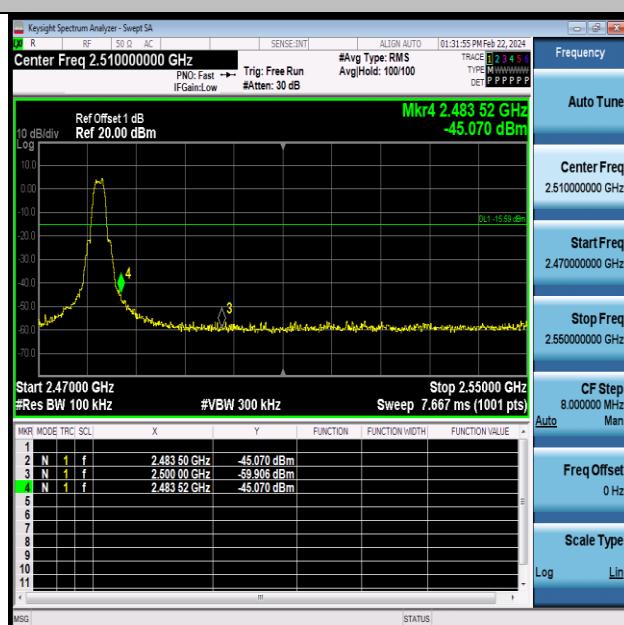

ZIGB-Ant1-2480-PASS