

TEST REPORT

On behalf of

Signify (China) Investment Co., Ltd.

Product Name: LED Lamp

Model No.: 9290032676, 9290032675

FCC ID: 2AGBW9290032675X

Prepared For: Signify (China) Investment Co., Ltd.
Building no.9, Lane 888, Tianlin Road, Minhang District,
Shanghai 200233, China.

Prepared By: Audix Technology (Shanghai) Co., Ltd.
3F and 4F, 34Bldg, 680 Guiping Rd.,
Caohejing Hi-Tech Park,
Shanghai 200233, China

Tel: +86-21-64955500



File No. : C1D2301014
Report No. : ACI-F23029
Date of Test : 2023.02.15-03.29
Date of Report : 2023.03.29

The statement is based on a single evaluation of one sample of the above-mentioned products. It does not imply an assessment of the whole production and does not permit the use of the test lab logo. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

TABLE OF CONTENTS

	Page
1 SUMMARY OF STANDARDS AND RESULTS	5
1.1 Description of Standards and Results.....	5
2 GENERAL INFORMATION.....	6
2.1 Description of Equipment Under Test.....	6
2.2 EUT Specifications Assessed in Current Report.....	7
2.3 Test Information.....	7
2.4 Duty Cycle Check	8
2.5 Sample Description	9
2.6 Supported equipment.....	9
2.7 Description of Test Facility.....	9
3 CONDUCTED EMISSION TEST	10
3.1 Test Equipment.....	10
3.2 Block Diagram of Test Setup	10
3.3 Conducted Emission Limits (§15.207).....	11
3.4 Test Configuration.....	11
3.5 Operating Condition of EUT.....	11
3.6 Test Procedures	11
3.7 Test Results	12
4 RADIATED EMISSION TEST.....	14
4.1 Test Equipment.....	14
4.2 Block Diagram of Test Setup	14
4.3 Radiated Emission Limit (§15.209)	15
4.4 Test Configuration.....	15
4.5 Operating Condition of EUT.....	16
4.6 Test Procedures	16
4.7 Test Results	17
5 99% OCCUPIED BANDWIDTH MEASUREMENT	45
5.1 Test Equipment.....	45
5.2 Block Diagram of Test Setup	45
5.3 Operating Condition of EUT.....	45
5.4 Test Procedure.....	45
5.5 Test Results	46
6 6 DB BANDWIDTH MEASUREMENT	54
6.1 Test Equipment.....	54
6.2 Block Diagram of Test Setup	54
6.3 Specification Limits (§15.247(a)(2)).....	54
6.4 Operating Condition of EUT.....	54
6.5 Test Procedure.....	54
6.6 Test Results	55
7 MAXIMUM OUTPUT POWER MEASUREMENT.....	62
7.1 Test Equipment.....	62
7.2 Block Diagram of Test Setup	62
7.3 Specification Limits ((§15.247(b)(3))	62
7.4 Operating Condition of EUT.....	62

7.5 Test Procedure 62

7.6 Test Results 64

8 EMISSION LIMITATIONS MEASUREMENT..... 72

8.1 Test Equipment..... 72

8.2 Block Diagram of Test Setup 72

8.3 Specification Limits (§15.247(d)) 72

8.4 Operating Condition of EUT 72

8.5 Test Procedure..... 72

8.6 Test Results 74

9 POWER SPECTRAL DENSITY MEASUREMENT 99

9.1 Test Equipment..... 99

9.2 Block Diagram of Test Setup 99

9.3 Specification Limits (§15.247(e)) 99

9.4 Operating Condition of EUT 99

9.5 Test Procedure..... 99

9.6 Test Results 100

10 ANTENNA REQUIREMENT 108

10.1 Specification Limits (§15.203)..... 108

10.2 Result..... 108

11 DEVIATION TO TEST SPECIFICATIONS 109

12 MEASUREMENT UNCERTAINTY LIST 110

APPENDIX I PHOTOGRAPHS OF TEST

APPENDIX II PHOTOGRAPHS OF EUT

TEST REPORT

Applicant : Signify (China) Investment Co., Ltd.
 EUT Description : LED Lamp
 (A) Model No. : Refer to Sec.2.1
 (B) Power Supply : 120V AC 60Hz
 (C) Test Voltage : 120V/60Hz

Test Procedure Used:

*FCC RULES AND REGULATIONS PART 15 SUBPART C
 AND ANSI C63.10-2013*

The device described above is tested by Audix Technology (Shanghai) Co., Ltd. to determine the maximum emission levels emanating from the device. The maximum emission levels are compared to the FCC Part 15 Subpart C limits.

The test results are contained in this test report and Audix Technology (Shanghai) Co., Ltd. is assumed full responsibility for the accuracy and completeness of these measurements. This report also shows that the EUT (M/N: Refer to Sec2.1), which was tested is technically compliance with the FCC limits.

This report applies to above tested Sample only. This report shall not be reproduced in part without written approval of Audix Technology (Shanghai) Co., Ltd.

The test results for EUT's BLE function are contained in No.ACI-F23028report.

Date of Test : 2023.02.15-03.29 Date of Report : 2023.03.29

Producer : Huimin Yan
 HUIMIN YAN / Assistant

Review : Byron Wu
 BYRON WU / Deputy Assistant Manager

AUDIX® For and on behalf of
 Audix Technology (Shanghai) Co., Ltd.

Kamp Chen
 Signatory :
 Authorized Signature(s) KAMP CHEN / Manager

1 SUMMARY OF STANDARDS AND RESULTS

1.1 Description of Standards and Results

The EUT have been tested according to the applicable standards as referenced below:

Description / Test Item	Test Standard	Results	Meets Limit
EMISSION			
Conducted Emission	FCC RULES AND REGULATIONS PART 15 SUBPART C AND ANSI C63.10:2013	Pass	15.207
Radiated Emission	FCC RULES AND REGULATIONS PART 15 SUBPART C AND ANSI C63.10:2013	Pass	15.209(a) 15.205(a)(c)
6 dB Bandwidth Measurement	FCC RULES AND REGULATIONS PART 15 SUBPART C AND ANSI C63.10:2013	Pass	15.247(a)(2)
Maximum Output Power Measurement	FCC RULES AND REGULATIONS PART 15 SUBPART C AND ANSI C63.10:2013	Pass	15.247(b)(3)
Emission Limitations Measurement	FCC RULES AND REGULATIONS PART 15 SUBPART C AND ANSI C63.10:2013	Pass	15.247(d)
Band Edge Measurement	FCC RULES AND REGULATIONS PART 15 SUBPART C AND ANSI C63.10:2013	Pass	15.247(d)
Power Spectral Density Measurement	FCC RULES AND REGULATIONS PART 15 SUBPART C AND ANSI C63.10:2013	Pass	15.247(e)
Antenna Requirement	FCC RULES AND REGULATIONS PART 15 SUBPART C AND ANSI C63.10:2013	Pass	15.203
N/A is an abbreviation for Not Applicable.			

2 GENERAL INFORMATION

2.1 Description of Equipment Under Test

Description	:	LED Lamp
Type of EUT	:	<input checked="" type="checkbox"/> Production <input type="checkbox"/> Pre-product <input type="checkbox"/> Pro-type
Model Number	:	9290032676, 9290032675
Note	:	The difference between the above models is only the bulb
Test Model	:	9290032676
Note	:	Models 9290032676 and 9290032675 were pre-test, the results of worst Model 9290032676 was selected for report.
Radio Tech	:	BLE 4.2; IEEE 802.11 b/g/n.
Channel Freq.	:	BLE: 2402MHz-2480MHz; 802.11b/g/n20: 2412MHz-2462MHz; 802.11n40: 2422MHz-2452MHz.
Modulation	:	BLE: GFSK; 802.11b: DSSS (CCK, DQPSK, DBPSK); 802.11g/n: OFDM (64QAM, 16QAM, QPSK, BPSK).
Antenna Info.	:	Antenna Type: Monopole Antenna Antenna Gain: -4 dBi
Applicant	:	Signify (China) Investment Co., Ltd. Building no.9, Lane 888, Tianlin Road, Minhang District, Shanghai 200233, China.

2.2 EUT Specifications Assessed in Current Report

Mode	Modulation	Data Rate(Mbps)
802.11b	DS (DQPSK, DBPSK, CCK)	Up to 11
802.11g	OFDM (64-QAM, 16-QAM, QPSK, BPSK)	Up to 54
802.11n-HT 20	OFDM (64-QAM, 16-QAM, QPSK, BPSK)	Up to 72.2
802.11n-HT 40	OFDM (64-QAM, 16-QAM, QPSK, BPSK)	Up to 150

Channel List			
Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)
1	2412	7	2442
2	2417	8	2447
3	2422	9	2452
4	2427	10	2457
5	2432	11	2462
6	2437		


2.3 Test Information


The test software “ EspRFTTestTool_v2.8_Manual.exe” was used to control EUT work in TX mode, Power Index and select test channel.

Mode	data rate (Mbps)	Test Channel		Frequency (MHz)
802.11b	11	Low:	1	2412
		Middle:	6	2437
		High:	11	2462
802.11g	6	Low:	1	2412
		Middle:	6	2437
		High:	11	2462
802.11n20	MCS0	Low:	1	2412
		Middle:	6	2437
		High:	11	2462
802.11n40	MCS0	Low:	3	2422
		Middle:	6	2437
		High:	9	2452

2.4 Duty Cycle Check

Mode	Transmission Duration (ms)	Transmission Period (ms)	Duty Cycle (%)
802.11b	3.169	3.191	99.31
802.11g	5.484	5.508	99.56
802.11n20	5.083	5.109	99.49
802.11n40	2.468	2.496	98.88

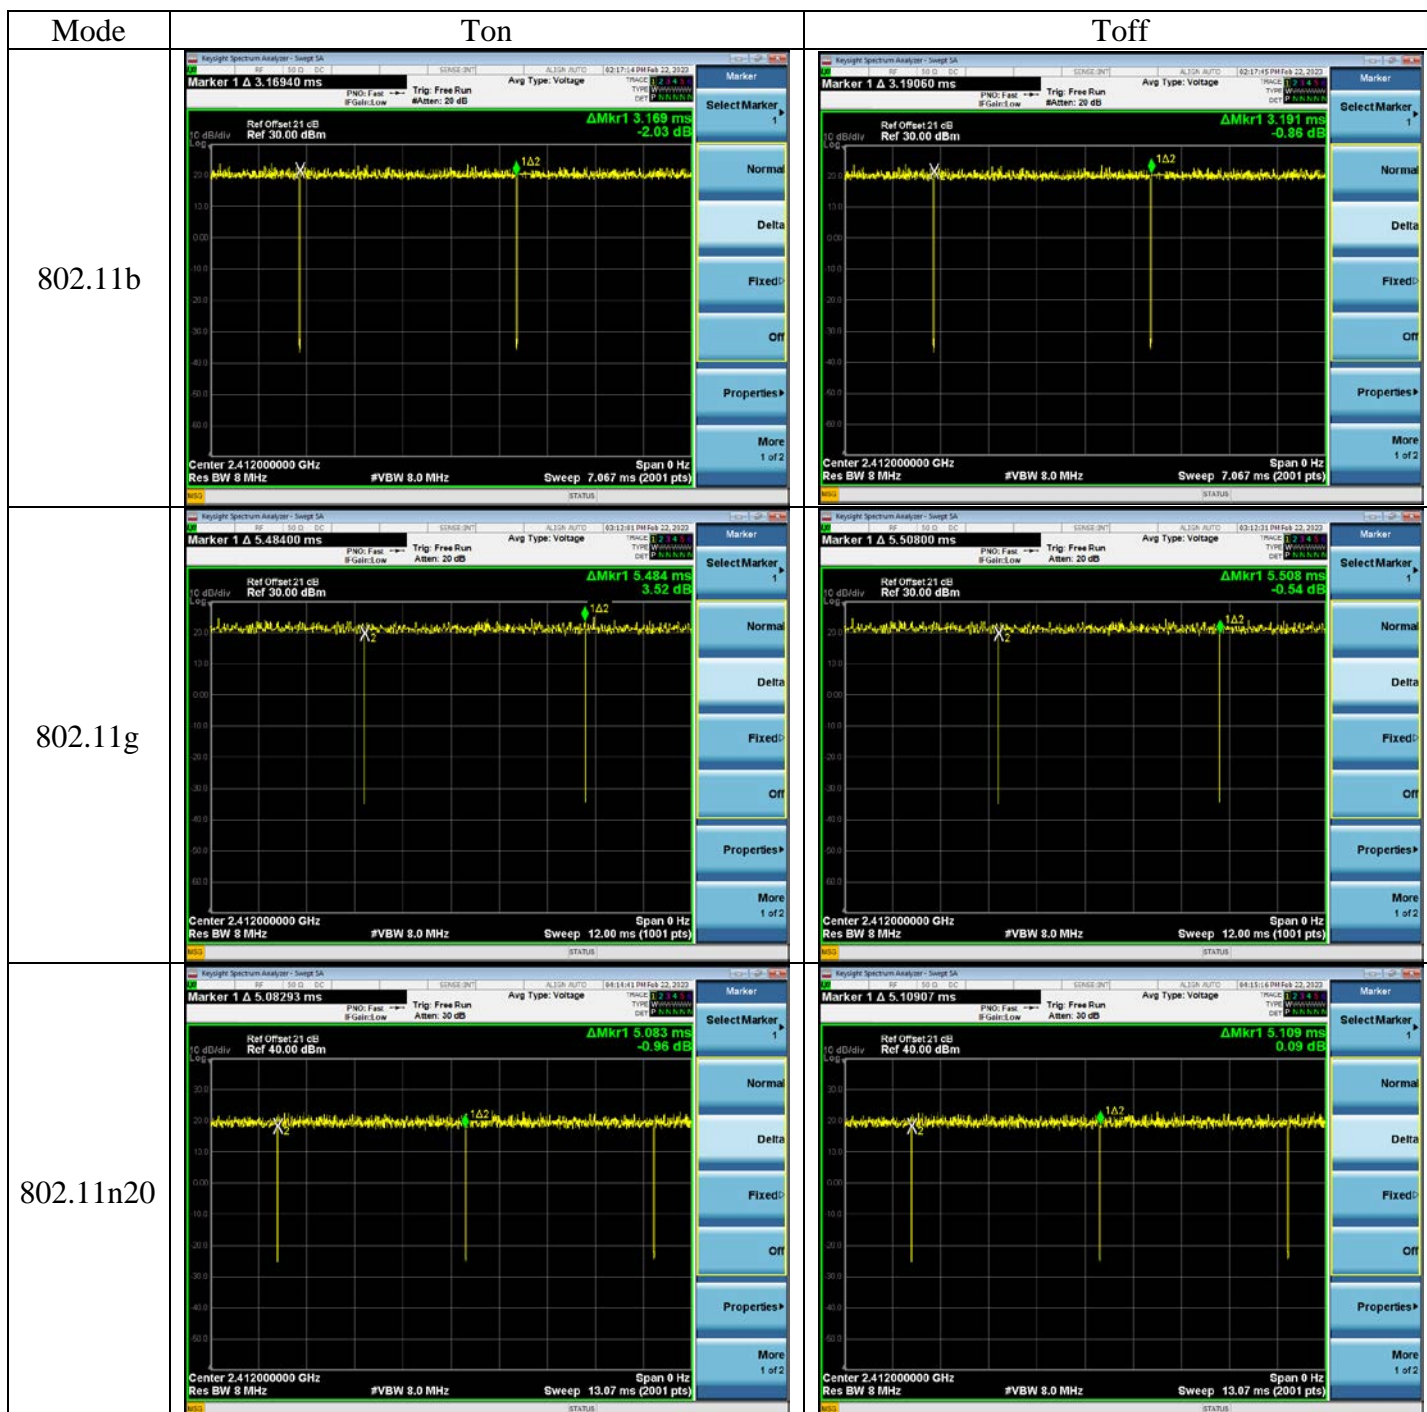

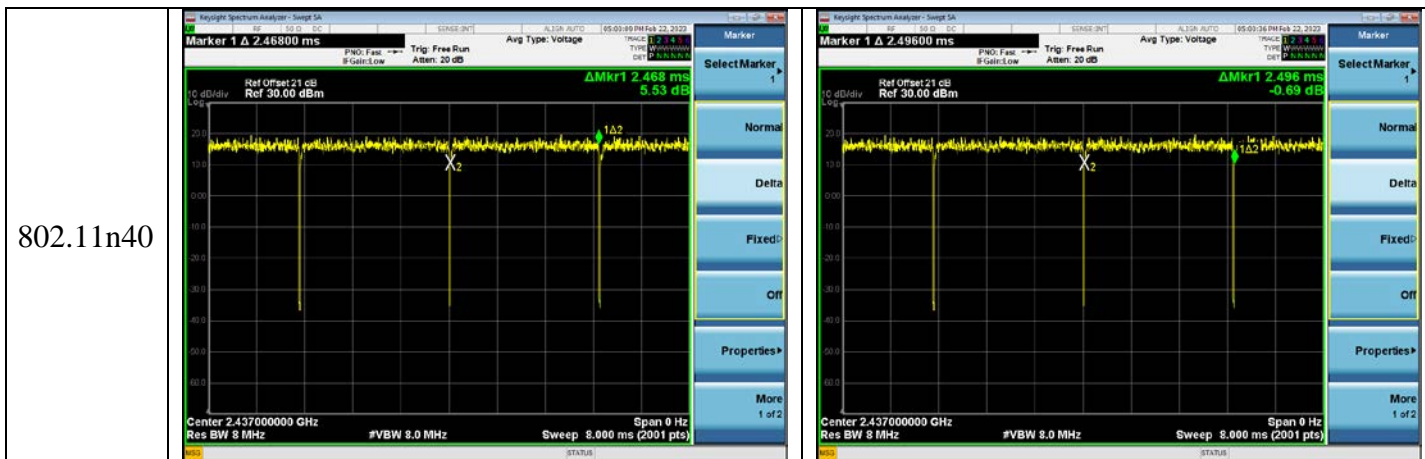

802.11n40

2.5 Sample Description

Test Item	Model Number	Sample Number	Date of received
Conducted Emission	9290032676	E2301041-01/02	2023.01.11
	9290032675	E2301042-01/02	2023.01.11
Radiated Emission	9290032676	E2302120-01/01	2023.02.10
	9290032675	E2302121-01/01	2023.02.10
Conducted RF Test	9290032676	E2302120a-01/01	2023.02.10
	9290032675	E2302121a-01/01	2023.02.10

2.6 Supported equipment

Brand : Acer
 Product Name: : Notebook PC
 Model Name : TravelMate P238 series
 Model Number : N15W8

Product Name : Test Fixture
 Product Function : USB to TTL

2.7 Description of Test Facility

Name of Firm : Audix Technology (Shanghai) Co., Ltd.

Site Location : 3F and 4F, 34Bldg, 680 Guiping Rd.,
 Caohejing Hi-Tech Park,
 Shanghai 200233, China.

Accredited by NVLAP, Lab Code : 200371-0

FCC Designation Number : CN5027

Test Firm Registration Number : 954668

3 CONDUCTED EMISSION TEST


3.1 Test Equipment

The following test equipments are used during the conducted emission test in a shielded room:

Item	Type	Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Interval
1.	Test Receiver	R&S	ESCI	101302	2022.06.07	1 Year
2.	Artificial Mains Network (AMN)	R&S	ENV4200	100125	2022.07.13	1 Year
3.	Software	Audix	e3	6.2009-1-15	--	--

3.2 Block Diagram of Test Setup

3.2.1 Conducted Disturbance Test Setup

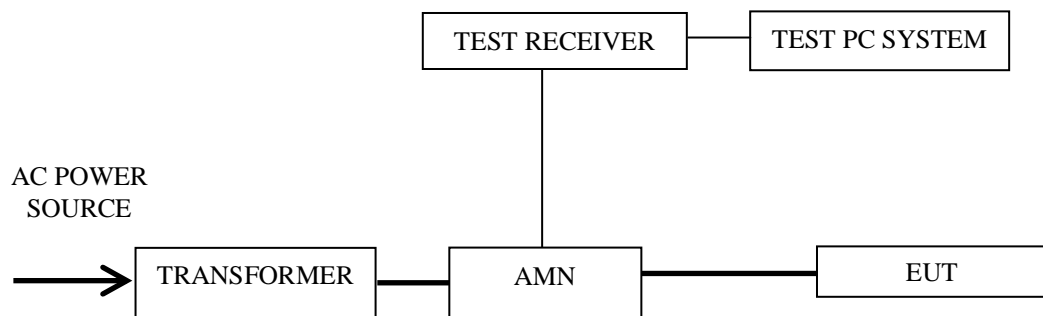

— : Signal Line
 — : Power Line

3.3 Conducted Emission Limits (§15.207)

Frequency Range (MHz)	Limits dB(μ V)	
	Quasi-peak	Average
0.15 ~ 0.5	66~56	56~46
0.5 ~ 5	56	46
5 ~ 30	60	50

NOTE 1 – The lower limit shall apply at the transition frequencies.
NOTE 2 – The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz~0.50 MHz

3.4 Test Configuration

The EUT (listed in Sec.2.1) was installed as shown on Sec.3.2 to meet FCC requirement and operating in a manner which tends to maximize its emission level in a normal application.

3.5 Operating Condition of EUT

3.5.1 Setup the EUT as shown in Sec. 3.2.

3.5.2 Turn on the power of all equipment.

3.5.3 Turn the EUT on the test mode, and then test.

3.6 Test Procedures

The EUT was placed upon a non-metallic table, which is 0.8 m above the horizontal conducting ground plane and 0.4 m from a vertical reference plane. The EUT was connected to the power mains through an Artificial Mains Network (AMN) to provide a 50 Ω coupling impedance for the measuring equipment. Both sides of AC line (Line & Neutral) were checked to find out the maximum conducted emission according to FCC Part 15 Subpart C and ANSI C63.10: 2013 requirements during conducted disturbance test.

The I.F. bandwidth of Test Receiver ESCI was set at 9 kHz.

The frequency range from 150 kHz to 30 MHz was checked.

Test with a dummy load in lieu of the antenna to determine compliance with Section 15.207 limits within the transmitter's fundamental emission band. (According to KDB 174176 D01 Line Conducted FAQ)

The test modes were done on conducted disturbance test and all the test results are listed in Sec. 3.7

3.7 Test Results

< **PASS** >

The frequency and amplitude of the highest conducted emission relative the limit is reported. All the emissions not reported below are too low against the FCC limit.

Worst case emission:

No.	Operation	Mode	Channel	Frequency (MHz)	Data Page
1.	Transmitting	802.11b	1	2412	P13

NOTE 1 – Level = Read Level + AMN Factor + Cable Loss

NOTE 2 – “QP” means “Quasi-Peak” values


NOTE 3 – The emission levels which not reported are too low against the official limit.

Worst case emission


EUT : LED Lamp Temperature : 22°C

Model No. : 9290032676 Humidity : 51%RH

Test Mode : Transmitting Date of Test : 2023.02.17

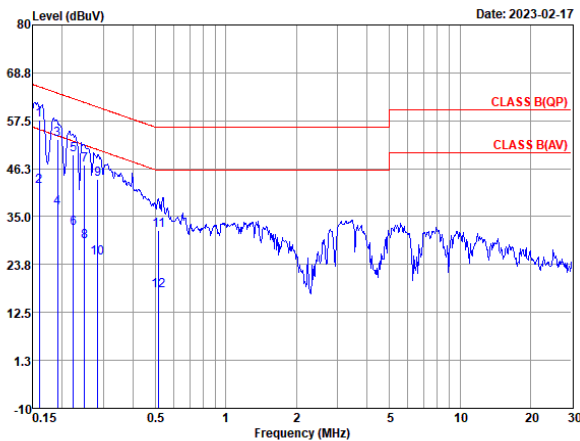

Line

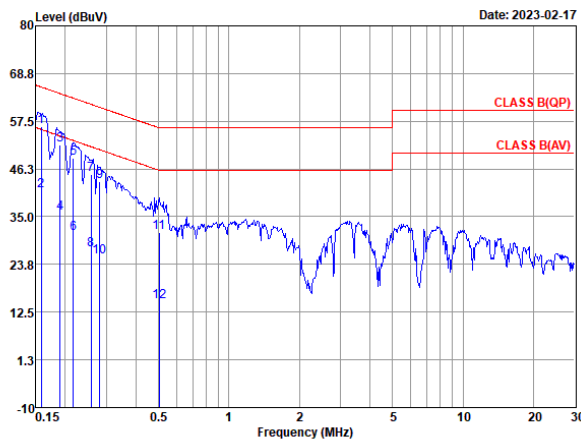

Neutral

Polarization	Frequency (MHz)	Meter Reading dB (μV)	AMN Factor (dB)	Cable Loss (dB)	Emission Level dB (μV)	Limits dB (μV)	Margin (dB)	Remark
Line	0.1594	47.87	9.7	0.03	57.6	65.5	7.9	QP
	0.1594	32.4	9.7	0.03	42.13	55.5	13.37	Average
	0.1907	43.48	9.7	0.03	53.21	64.01	10.8	QP
	0.1907	27.3	9.7	0.03	37.03	54.01	16.98	Average
	0.2229	39.75	9.7	0.03	49.48	62.71	13.23	QP
	0.2229	22.5	9.7	0.03	32.23	52.71	20.48	Average
	0.24945	37.28	9.7	0.03	47.01	61.78	14.77	QP
	0.24945	19.4	9.7	0.03	29.13	51.78	22.65	Average
	0.28328	33.97	9.7	0.03	43.7	60.72	17.02	QP
	0.28328	15.5	9.7	0.03	25.23	50.72	25.49	Average
	0.5155	21.97	9.72	0.04	31.73	56	24.27	QP
0.5155	7.9	9.72	0.04	17.66	46	28.34	Average	
Neutral	0.15816	46.47	9.7	0.03	56.2	65.56	9.36	QP
	0.15816	31.3	9.7	0.03	41.03	55.56	14.53	Average
	0.19039	42.13	9.7	0.03	51.86	64.02	12.16	QP
	0.19039	26.1	9.7	0.03	35.83	54.02	18.19	Average
	0.2162	39.01	9.7	0.03	48.74	62.96	14.22	QP
	0.2162	21.3	9.7	0.03	31.03	52.96	21.93	Average
	0.2582	35.26	9.7	0.03	44.99	61.49	16.5	QP
	0.2582	17.5	9.7	0.03	27.23	51.49	24.26	Average
	0.28029	33.45	9.7	0.03	43.18	60.81	17.63	QP
	0.28029	15.7	9.7	0.03	25.43	50.81	25.38	Average
	0.50469	21.62	9.7	0.04	31.36	56	24.64	QP
0.50469	5.3	9.7	0.04	15.04	46	30.96	Average	

TEST ENGINEER: Jarey

4 RADIATED EMISSION TEST

4.1 Test Equipment

The following test equipment are used during the radiated emission test in a semi-anechoic chamber:


Item	Type	Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Interval
1.	Preamplifier	Agilent	8447D	2944A10548	2022.06.06	1 Year
2.	Preamplifier	HP	8449B	3008A00864	2022.06.06	1 Year
3.	Spectrum Analyzer	Agilent	N9010A	MY52221182	2022.09.15	1 Year
4.	Test Receiver	R&S	ESCI	101303	2022.06.07	1 Year
5.	Bilog Antenna+6dB Attenuator	Schwarz beck	VULB 9168+EMCI-N-6-06	707+AT-N0637	2022.07.25	1 Year
6.	Horn Antenna	EMCO	3115	9607-4878	2022.07.21	1 Year
7.	Horn Antenna	EMCO	3116	00062643	2022.12.12	1 Year
8.	Cavity Band Rejection Filter	Microwave	WT-A3882-R10	WT200312-1-1	2022.06.06	1 Year
9.	Software	Audix	e3	6.111206	--	--

4.2 Block Diagram of Test Setup


4.2.1 EUT & Peripherals



4.2.2 Below 1GHz

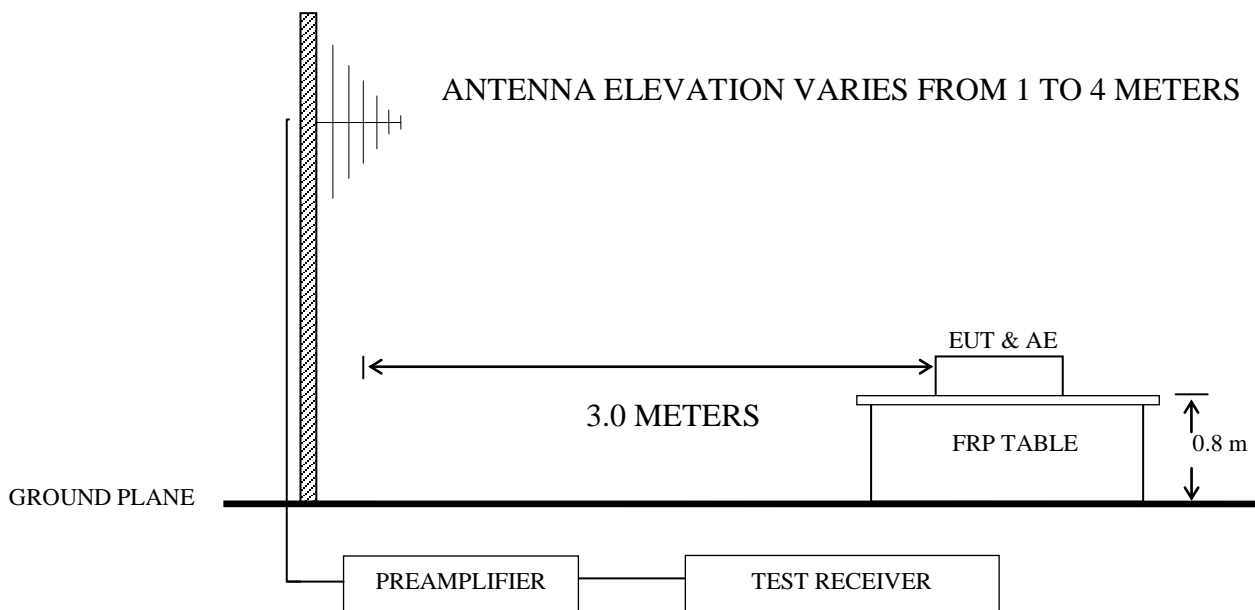

4.2.3 Above 1GHz

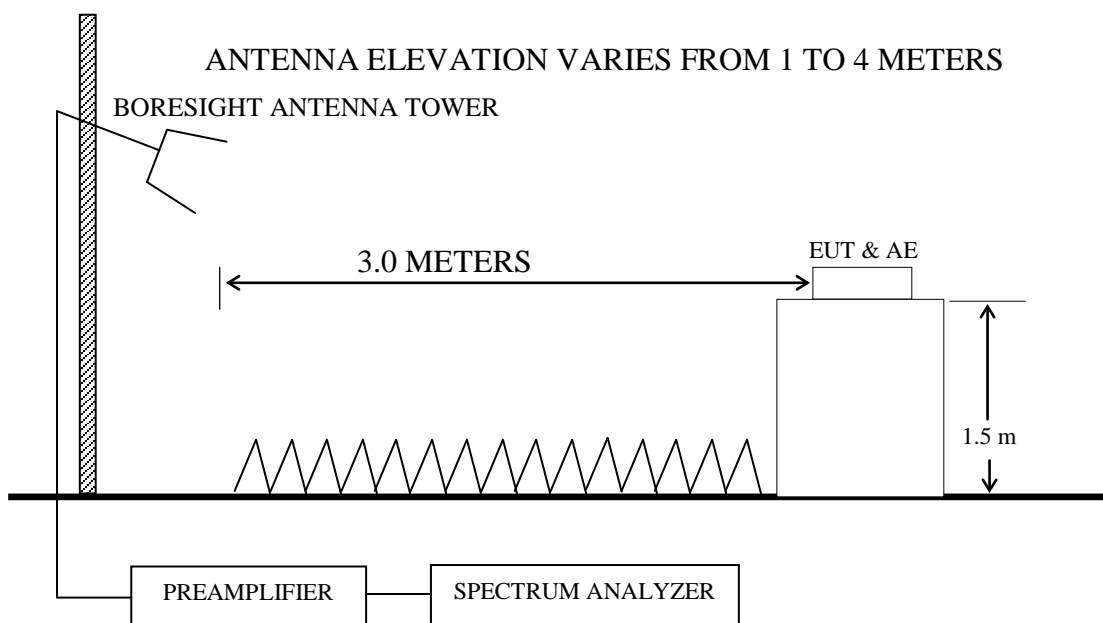

4.3 Radiated Emission Limit (§15.209)

Frequency (MHz)	Distance (m)	Field strength limits (µV/m)	
		(µV/m)	(µV/m)
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46.0
Above 960	3	500	54.0

NOTE 1 - Emission Level dB (µV/m) = 20 log Emission Level (µV/m)
 NOTE 2 - The tighter limit applies at the band edges.
 NOTE 3 - Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.
 NOTE 4 - The limits shown are based on Quasi-peak value detector below or equal to 1GHz and Average value detector above 1GHz.
 NOTE 5 - Above 1 GHz, the limit on peak emission is 20 dB above the maximum permitted average emission limit applicable to the EUT

4.4 Test Configuration

The EUT (listed in Sec.2.1) and the simulators (listed in Sec.2.2) were installed as shown on Sec.4.2 to meet FCC requirements and operating in a manner that tends to maximize its emission level in a normal application.

4.5 Operating Condition of EUT

4.5.1 Setup the EUT as shown in Sec. 4.2.

4.5.2 Turn the EUT on.

4.5.3 Connect the EUT and the TTL terminal of Test Fixture through three HCI cables of EUT, as follows (TX to RXD, RX to TXD, GND to GND). Plug the USB terminal of Test Fixture to the USB port of Notebook PC.

4.5.4 Use the software as section 2.3 to select the test mode, then disconnect the Test Fixture from EUT, remove the Test Fixture and Notebook PC, then test.

4.5.5 Repeat step 4.5.3 and 4.5.4, until the test of all modes finished.

4.6 Test Procedures

Radiated emission test applies to harmonics/spurs that fall in the restricted bands listed in Section 15.205. The maximum permitted average field strength is listed in Section 15.209. A pre-amp is necessary for this measurement. For measurement above 1 GHz, set RBW = 1MHz, VBW = 10 Hz, Sweep: Auto. If the emission is pulsed, modify the unit for continuous operation; use the settings shown above, then correct the reading by subtracting the peak-average correction factor, derived from the appropriate duty cycle calculation.

The EUT was placed on a turntable. Below 1 GHz, the table height is 80 cm above the reference ground plane. Above 1 GHz, the table height is 1.5 m. The turntable rotated 360 degrees to determine the position of the maximum emission level. The EUT was set 3 meters away from the receiving antenna, which was mounted on an antenna tower. The antenna moved up and down between 1 meter and 4 meters to find out the maximum emission level. Broadband antenna (Calibrated Bilog Antenna) or Horn antenna was used as receiving antenna. Both horizontal and vertical polarizations of the antenna were set on measurement. In order to find the maximum emission, all of the interference cables were manipulated according to ANSI C63.10: 2013 requirements during radiated emission test.

The bandwidth of Test Receiver R&S ESCI was set at 120 kHz from 30MHz to 1000MHz.

The bandwidth of Agilent N9010A was set at 1MHz for above 1GHz.

The frequency range from 30 MHz to 25 GHz (Up to 10th harmonics from fundamental frequency) was checked.

All the test results are listed in Sec.4.7.

4.7 Test Results

<PASS>

The frequency and amplitude of the highest radiated emission relative the limit is reported. All the emissions not reported below are too low against the FCC limit.

Frequency range: below 1GHz (Worst case emission)

No.	Operation	Mode	Channel	Frequency	Data Page
1.	Transmitting	802.11b	1	2412 MHz	P19
2.		802.11g	1	2412 MHz	P20
3.		802.11n20	1	2412 MHz	P21
4.		802.11n40	3	2422 MHz	P22

Frequency range: above 1GHz

No.	Operation	Mode	Channel	Frequency	Data Page
1.	Transmitting	802.11b	1	2412 MHz	P23
2.			6	2437 MHz	P24
3.			11	2462 MHz	P25
4.		802.11g	11	2462 MHz	P26
5.		802.11n20	11	2462 MHz	P27
6.		802.11n40	9	2452 MHz	P28

Band-Edge:

No.	Operation	Mode	Channel	Frequency	Data Page
1.	Transmitting	802.11b	1	2412 MHz	P29
2.			11	2462 MHz	P30
3.		802.11g	1	2412 MHz	P31
4.			11	2462 MHz	P32
5.		802.11n20	1	2412 MHz	P33
6.			11	2462 MHz	P34
7.		802.11n40	3	2422 MHz	P35
8.			9	2452 MHz	P36

Restricted bands:


No.	Operation	Mode	Channel	Frequency	Data Page
1.	Transmitting	802.11b	1	2412 MHz	P37
3.			11	2462 MHz	P38
4.		802.11g	1	2412 MHz	P39
5.			11	2462 MHz	P40
6.		802.11n20	1	2412 MHz	P41
7.			11	2462 MHz	P42
8.		802.11n40	3	2422 MHz	P43
9.			9	2452 MHz	P44

- NOTE 1 – Level = Read Level + Antenna Factor + Cable Loss - Preamp Factor
- NOTE 2 – “QP” means “Quasi-Peak” values
- NOTE 3 – 0° was the table front facing the antenna. Degree is calculated from 0° clockwise facing the antenna.
- NOTE 4 – The emission levels which not reported are too low against the official limit.
- NOTE 5 – The emission levels recorded below is data of EUT configured in Standing direction, for this direction was the maximum emission direction during the test. The data of Side & Lying direction are too low against the official limit to be reported.
- NOTE 6 – All reading are Quasi-Peak values below or equal to 1GHz, Peak and Average values above 1GHz.
For above 1GHz test, if the peak measured value complies with the average limit, it is unnecessary to perform an average measurement.
- NOTE 7 – The frequency range 2310-2390MHz & 2483.5-2500MHz were tested for Restricted bands.


Worst case emission < 1GHz

EUT : LED Lamp Temperature : 22°C
 Model No. : 9290032676 Humidity : 51%RH
 Test Mode : Transmitting Date of Test : 2023.02.15

802.11b CH2412MHz

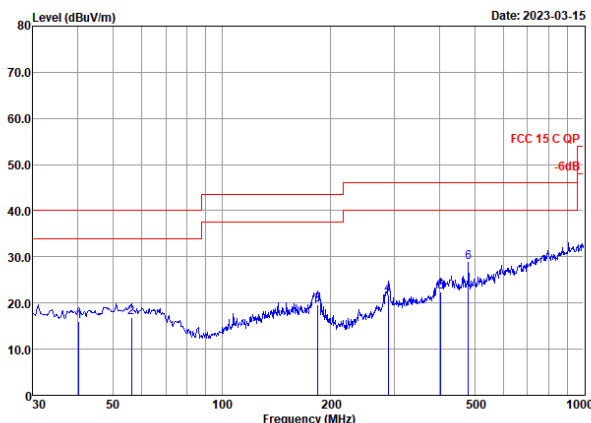


Horizontal

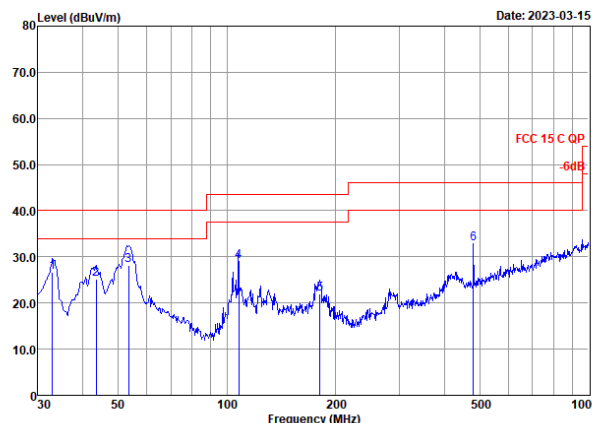


Vertical

Polarization	Frequency (MHz)	Meter Reading dB (μV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Emission Level dB (μV/m)	Limits dB (μV/m)	Margin (dB)	Remark
Horizontal	40.135	24.78	18.83	0.67	28.24	16.04	40	23.96	QP
	56.197	24.78	19.48	0.8	28.2	16.86	40	23.14	QP
	183.84	28.26	17.3	1.46	27.47	19.55	43.5	23.95	QP
	287.99	27.87	19.06	1.86	26.96	21.83	46	24.17	QP
	403.25	26.5	21.37	2.17	27.6	22.44	46	23.56	QP
	480.53	31.12	23.1	2.4	27.84	28.78	46	17.22	QP
Vertical	32.864	35.46	18.8	0.59	28.28	26.57	40	13.43	QP
	43.506	33.54	19.1	0.7	28.23	25.11	40	14.89	QP
	53.471	36.1	19.55	0.78	28.2	28.23	40	11.77	QP
	107.71	39.71	16.3	1.13	28.06	29.08	43.5	14.42	QP
	180.65	30.21	17.85	1.44	27.49	22.01	43.5	21.49	QP
	480.53	35.11	23.1	2.4	27.84	32.77	46	13.23	QP

802.11g CH2412MHz

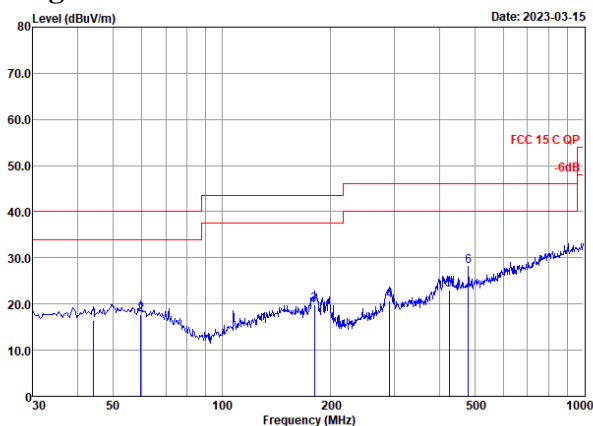


Horizontal

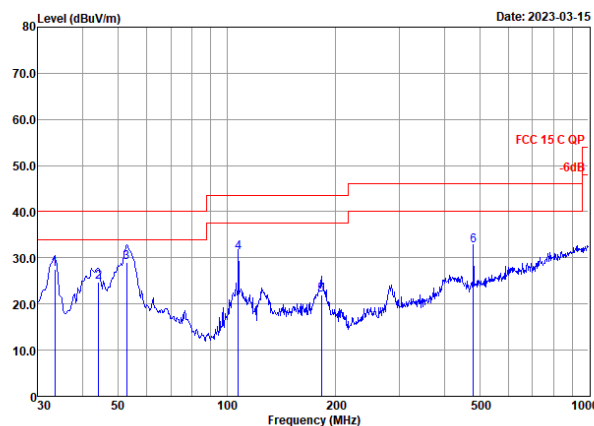


Vertical

Polarization	Frequency (MHz)	Meter Reading dB (μV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Emission Level dB (μV/m)	Limits dB (μV/m)	Margin (dB)	Remark
Horizontal	44.12	24.82	19.13	0.71	28.22	16.44	40	23.56	QP
	59.649	25.82	19.32	0.83	28.2	17.77	40	22.23	QP
	180.02	28.08	17.9	1.44	27.5	19.92	43.5	23.58	QP
	291.04	26.63	19.12	1.88	26.94	20.69	46	25.31	QP
	425.03	26.38	22.2	2.23	27.75	23.06	46	22.94	QP
	480.53	30.6	23.1	2.4	27.84	28.26	46	17.74	QP
Vertical	33.445	36.48	18.8	0.6	28.28	27.6	40	12.4	QP
	44.12	33.21	19.13	0.71	28.22	24.83	40	15.17	QP
	52.76	36.73	19.6	0.78	28.2	28.91	40	11.09	QP
	107.51	41.95	16.2	1.13	28.06	31.22	43.5	12.28	QP
	182.56	30.42	17.6	1.46	27.48	22	43.5	21.5	QP
	480.01	35	23.1	2.4	27.84	32.66	46	13.34	QP

802.11n20 CH2412MHz

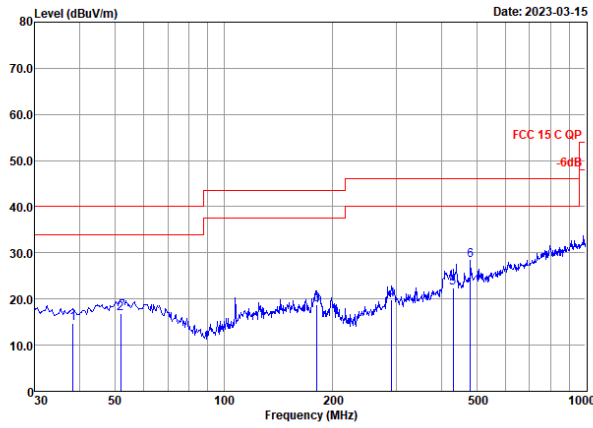


Horizontal

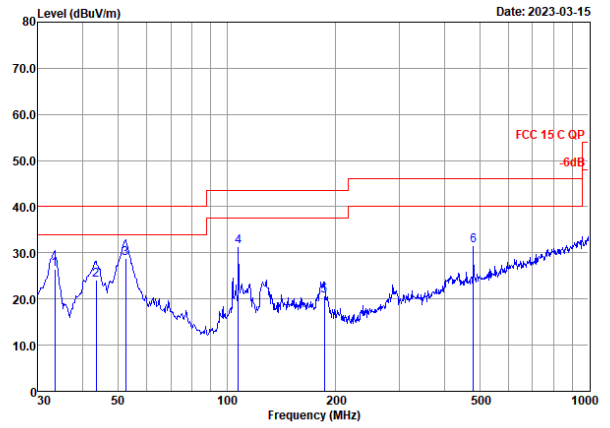


Vertical

Polarization	Frequency (MHz)	Meter Reading dB (μV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Emission Level dB (μV/m)	Limits dB (μV/m)	Margin (dB)	Remark
Horizontal	38.212	23.47	18.95	0.65	28.25	14.82	40	25.18	QP
	51.843	24.77	19.6	0.77	28.2	16.94	40	23.06	QP
	180.65	26.94	17.85	1.44	27.49	18.74	43.5	24.76	QP
	291.04	25.71	19.12	1.88	26.94	19.77	46	26.23	QP
	429.52	25.44	22.5	2.24	27.77	22.41	46	23.59	QP
	480.53	30.62	23.1	2.4	27.84	28.28	46	17.72	QP
Vertical	33.445	35.3	18.8	0.6	28.28	26.42	40	13.58	QP
	43.506	32.59	19.1	0.7	28.23	24.16	40	15.84	QP
	52.391	36.65	19.6	0.78	28.2	28.83	40	11.17	QP
	107.51	42.05	16.2	1.13	28.06	31.32	43.5	12.18	QP
	185.79	29.48	17.2	1.48	27.46	20.7	43.5	22.8	QP
	480.53	33.95	23.1	2.4	27.84	31.61	46	14.39	QP

802.11n40 CH2422MHz

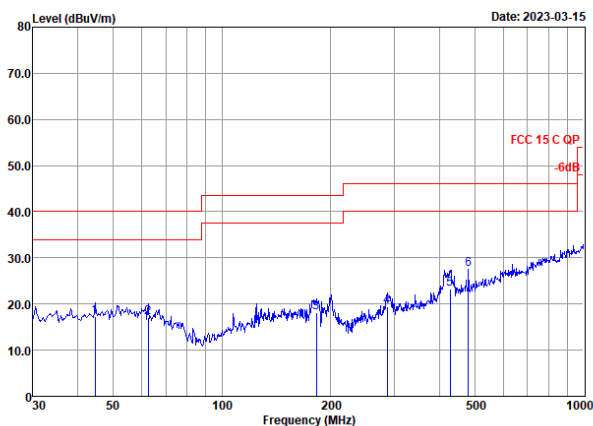

Horizontal

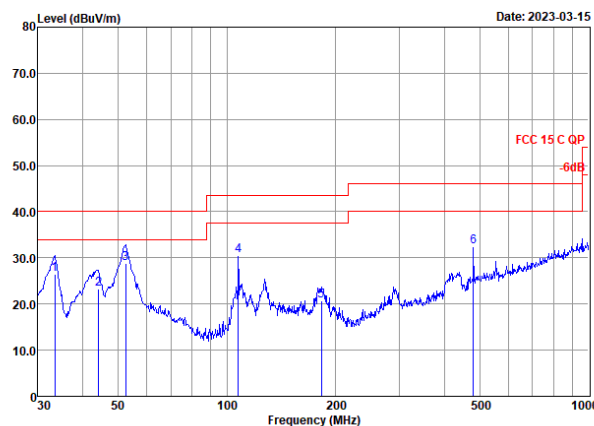

Vertical





Polarization	Frequency (MHz)	Meter Reading dB (μV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Emission Level dB (μV/m)	Limits dB (μV/m)	Margin (dB)	Remark
Horizontal	44.587	25.52	19.21	0.71	28.22	17.22	40	22.78	QP
	62.431	25.33	18.98	0.86	28.2	16.97	40	23.03	QP
	182.56	26.63	17.6	1.46	27.48	18.21	43.5	25.29	QP
	285.98	25.47	19.02	1.86	26.97	19.38	46	26.62	QP
	428.02	26.49	22.4	2.23	27.77	23.35	46	22.65	QP
	480.53	29.86	23.1	2.4	27.84	27.52	46	18.48	QP
Vertical	33.445	35.35	18.8	0.6	28.28	26.47	40	13.53	QP
	44.12	31.67	19.13	0.71	28.22	23.29	40	16.71	QP
	52.391	36.59	19.6	0.78	28.2	28.77	40	11.23	QP
	107.51	41.28	16.2	1.13	28.06	30.55	43.5	12.95	QP
	182.56	29.13	17.6	1.46	27.48	20.71	43.5	22.79	QP
	480.53	34.68	23.1	2.4	27.84	32.34	46	13.66	QP

TEST ENGINEER: Jarey

Radiated Emission > 1GHz

EUT : LED Lamp Temperature : 22°C
 Model No. : 9290032676 Humidity : 51%RH
 Test Mode : Transmitting Date of Test : 2023.02.19

802.11b CH2412MHz

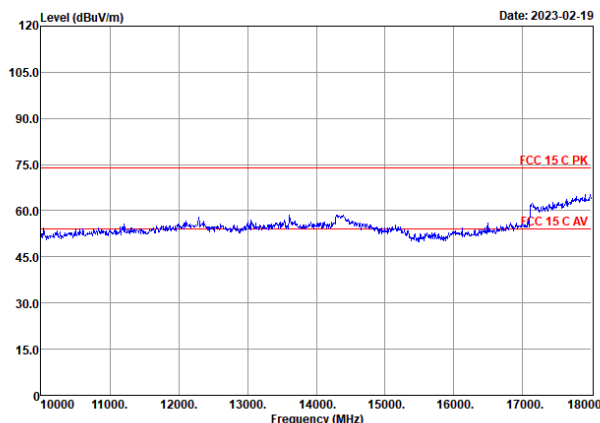
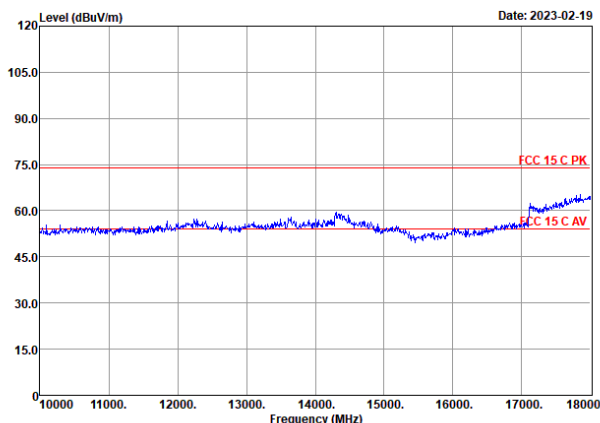
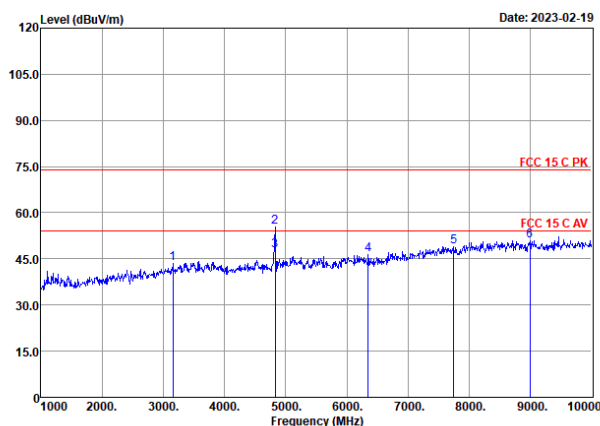
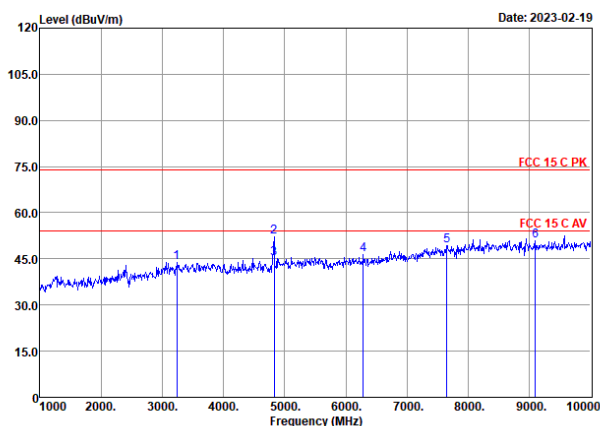


Horizontal

Vertical

Polarization	Frequency (MHz)	Meter Reading dB (μV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Emission Level dB (μV/m)	Limits dB (μV/m)	Margin (dB)	Remark
Horizontal	3241	42	30.98	6.14	35.32	43.8	74	30.2	Peak
	4825	46.43	32.97	7.55	34.76	52.19	74	21.81	Peak
	4825	39.29	32.97	7.55	34.76	45.05	54	8.95	Average
	6283	37.87	34.6	8.6	34.77	46.3	74	27.7	Peak
	7651	36.97	37.1	9.9	34.7	49.27	74	24.73	Peak
	9100	36.51	38.3	10.79	34.69	50.91	74	23.09	Peak
Vertical	3160	42.13	30.74	6.05	35.35	43.57	74	30.43	Peak
	4825	49.63	32.97	7.55	34.76	55.39	74	18.61	Peak
	4825	41.96	32.97	7.55	34.76	47.72	54	6.28	Average
	6346	37.85	34.53	8.68	34.76	46.3	74	27.7	Peak
	7750	36.58	37.1	10.01	34.7	48.99	74	25.01	Peak
	8992	36.73	38.2	10.7	34.7	50.93	74	23.07	Peak

802.11b CH2437MHz

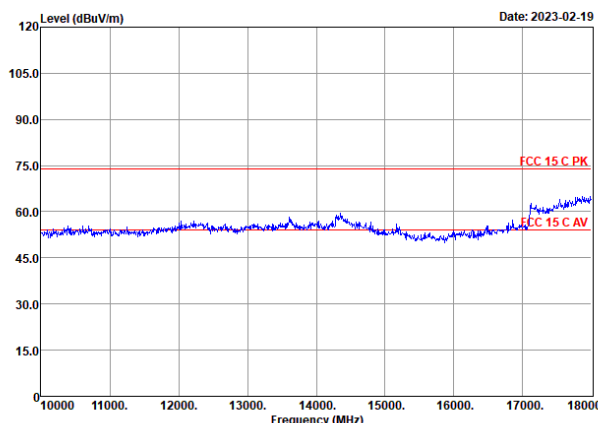
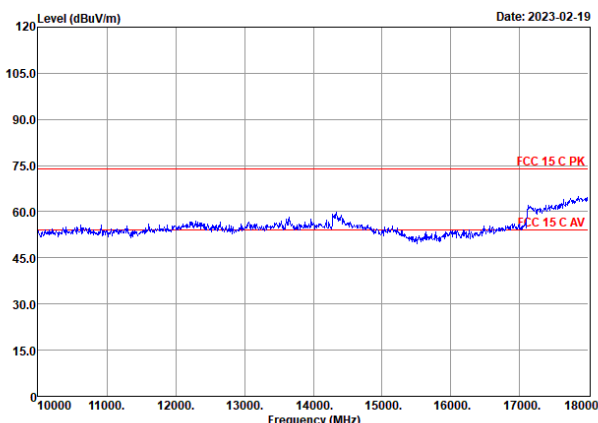
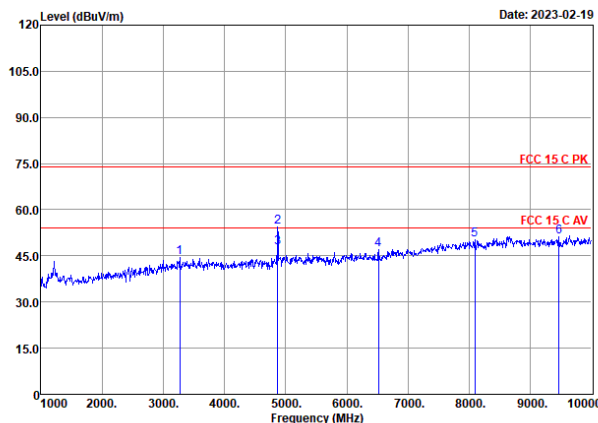
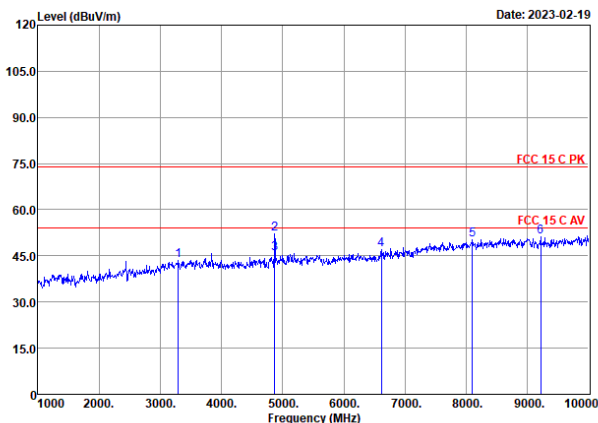


Horizontal

Vertical

Polarization	Frequency (MHz)	Meter Reading dB (μV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Emission Level dB (μV/m)	Limits dB (μV/m)	Margin (dB)	Remark
Horizontal	3295	41.32	31.2	6.18	35.3	43.4	74	30.6	Peak
	4870	46.29	33.1	7.61	34.75	52.25	74	21.75	Peak
	4870	39.84	33.1	7.61	34.75	45.8	54	8.2	Average
	6616	37.88	34.9	8.93	34.74	46.97	74	27.03	Peak
	8101	37.09	37.5	10.28	34.7	50.17	74	23.83	Peak
	9217	36.7	38.2	10.88	34.68	51.1	74	22.9	Peak
Vertical	3268	42.59	31.08	6.14	35.31	44.5	74	29.5	Peak
	4870	48.41	33.1	7.61	34.75	54.37	74	19.63	Peak
	4870	41.86	33.1	7.61	34.75	47.82	54	6.18	Average
	6517	38.44	34.45	8.85	34.75	46.99	74	27.01	Peak
	8092	37.06	37.55	10.28	34.7	50.19	74	23.81	Peak
	9469	36.2	38.5	11.06	34.65	51.11	74	22.89	Peak

802.11b CH2462MHz

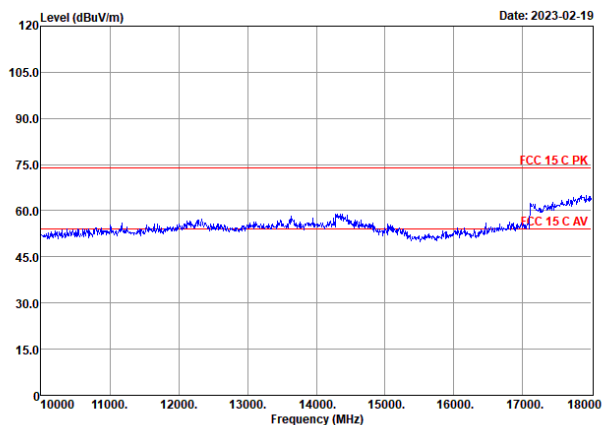
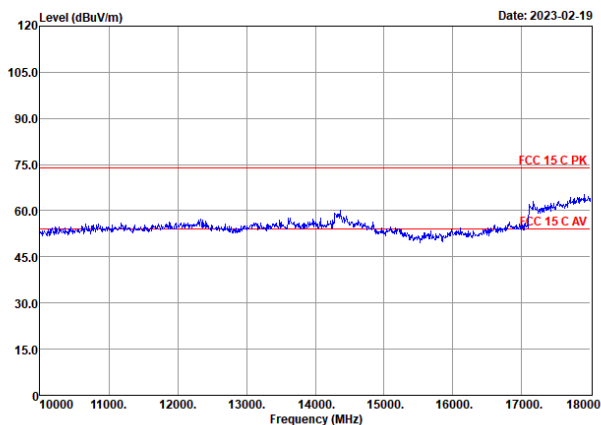
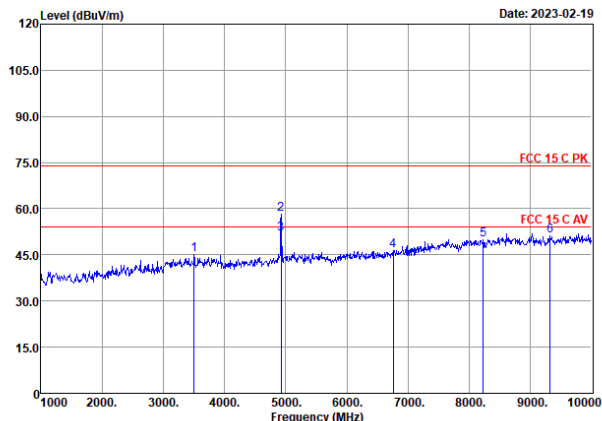
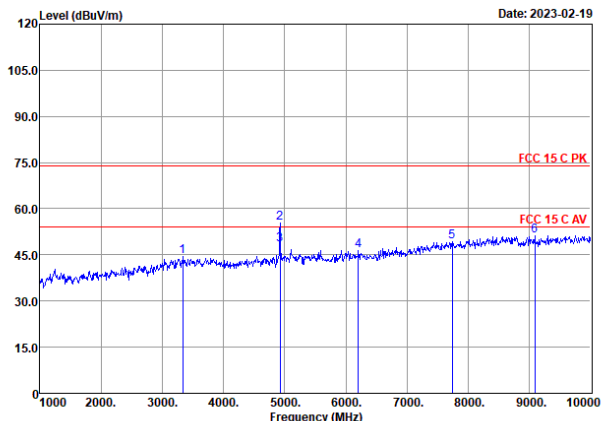


Horizontal

Vertical

Polarization	Frequency (MHz)	Meter Reading dB (μV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Emission Level dB (μV/m)	Limits dB (μV/m)	Margin (dB)	Remark
Horizontal	3331	42.34	31.2	6.23	35.29	44.48	74	29.52	Peak
	4924	49	33.27	7.67	34.73	55.21	74	18.79	Peak
	4924	42.05	33.27	7.67	34.73	48.26	54	5.74	Average
	6202	37.87	34.6	8.6	34.78	46.29	74	27.71	Peak
	7741	37.03	37.1	10.01	34.7	49.44	74	24.56	Peak
	9091	36.95	38.3	10.79	34.69	51.35	74	22.65	Peak
Vertical	3502	42.91	31.14	6.36	35.24	45.17	74	28.83	Peak
	4924	52.03	33.27	7.67	34.73	58.24	74	15.76	Peak
	4924	45.48	33.27	7.67	34.73	51.69	54	2.31	Average
	6760	36.89	35.3	9.01	34.72	46.48	74	27.52	Peak
	8227	36.61	37.7	10.34	34.7	49.95	74	24.05	Peak
	9325	36.82	38	10.97	34.67	51.12	74	22.88	Peak

802.11g CH2462MHz

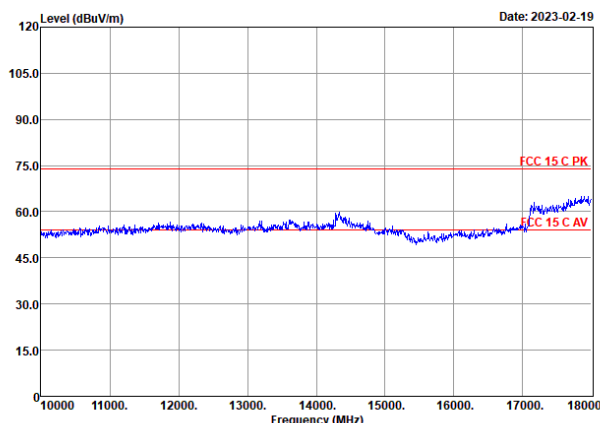
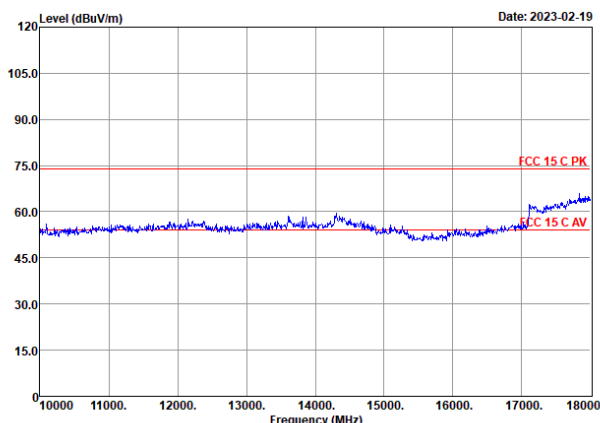
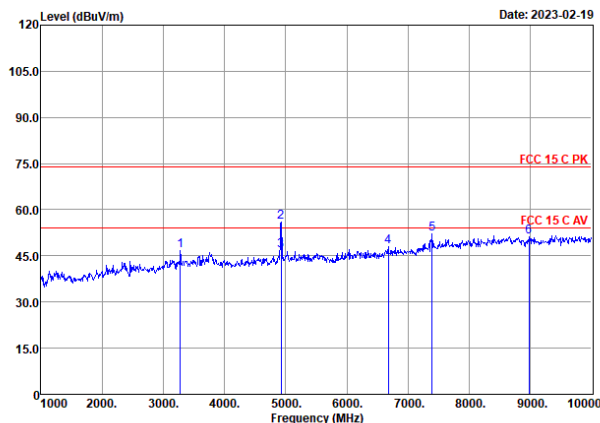
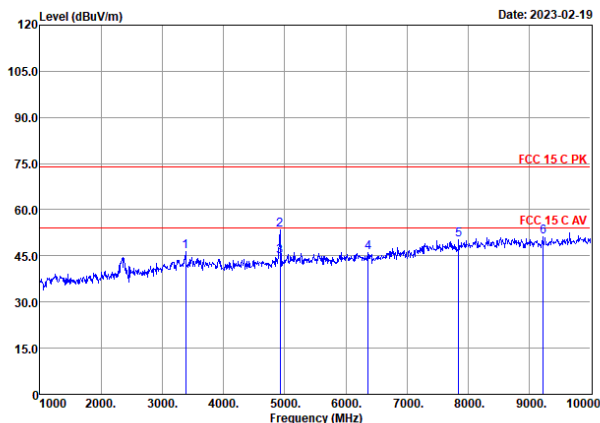


Horizontal

Vertical

Polarization	Frequency (MHz)	Meter Reading dB (μV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Emission Level dB (μV/m)	Limits dB (μV/m)	Margin (dB)	Remark
Horizontal	3385	44.09	31.2	6.27	35.27	46.29	74	27.71	Peak
	4924	47.2	33.27	7.67	34.73	53.41	74	20.59	Peak
	4924	38.6	33.27	7.67	34.73	44.81	54	9.19	Average
	6364	37.74	34.5	8.68	34.76	46.16	74	27.84	Peak
	7840	37.63	37.3	10.11	34.7	50.34	74	23.66	Peak
	9226	36.64	38.2	10.88	34.68	51.04	74	22.96	Peak
Vertical	3277	44.8	31.12	6.18	35.31	46.79	74	27.21	Peak
	4924	49.66	33.27	7.67	34.73	55.87	74	18.13	Peak
	4924	40.39	33.27	7.67	34.73	46.6	54	7.4	Average
	6679	38.59	35.13	9.01	34.73	48	74	26	Peak
	7390	40.19	37	9.69	34.7	52.18	74	21.82	Peak
	8974	36.8	38.25	10.7	34.7	51.05	74	22.95	Peak

802.11n20 CH2462MHz

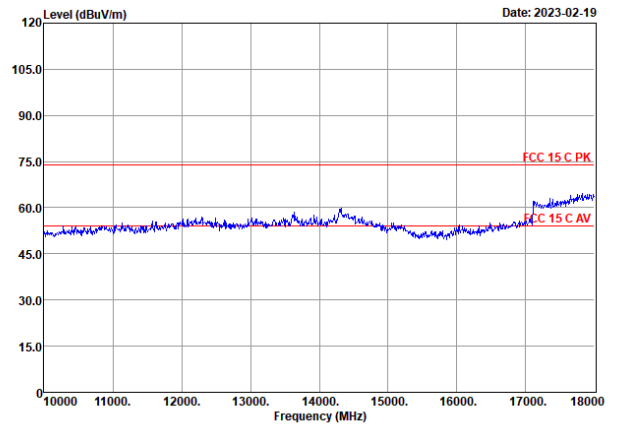
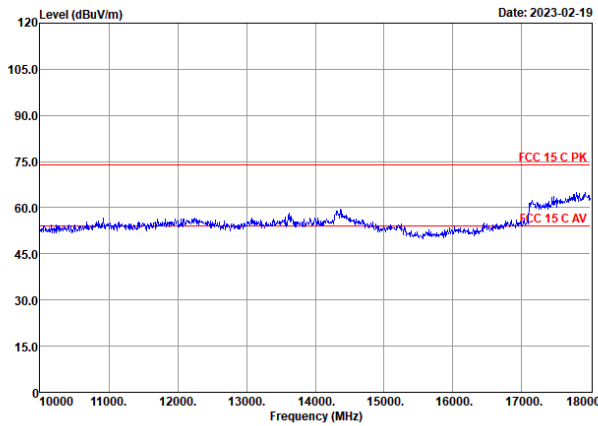
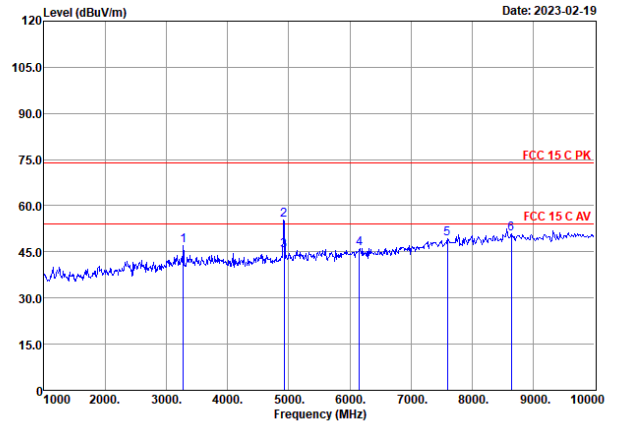
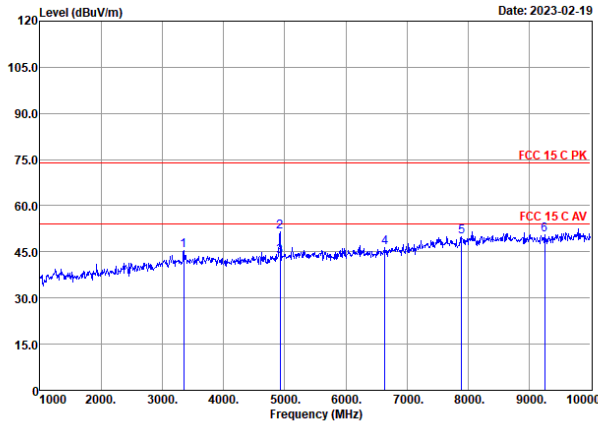


Horizontal

Vertical

Polarization	Frequency (MHz)	Meter Reading dB (μV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Emission Level dB (μV/m)	Limits dB (μV/m)	Margin (dB)	Remark
Horizontal	3349	43.3	31.2	6.23	35.28	45.45	74	28.55	Peak
	4924	45.35	33.27	7.67	34.73	51.56	74	22.44	Peak
	4924	37.27	33.27	7.67	34.73	43.48	54	10.52	Average
	6634	37.17	35	8.93	34.74	46.36	74	27.64	Peak
	7894	37.14	37.5	10.11	34.7	50.05	74	23.95	Peak
	9253	36.31	38.2	10.88	34.67	50.72	74	23.28	Peak
Vertical	3277	45.07	31.12	6.18	35.31	47.06	74	26.94	Peak
	4924	49.16	33.27	7.67	34.73	55.37	74	18.63	Peak
	4924	39.12	33.27	7.67	34.73	45.33	54	8.67	Average
	6157	37.79	34.53	8.52	34.78	46.06	74	27.94	Peak
	7597	37.07	37	9.9	34.7	49.27	74	24.73	Peak
	8641	36.58	38.5	10.52	34.7	50.9	74	23.1	Peak

802.11n40 CH2452MHz

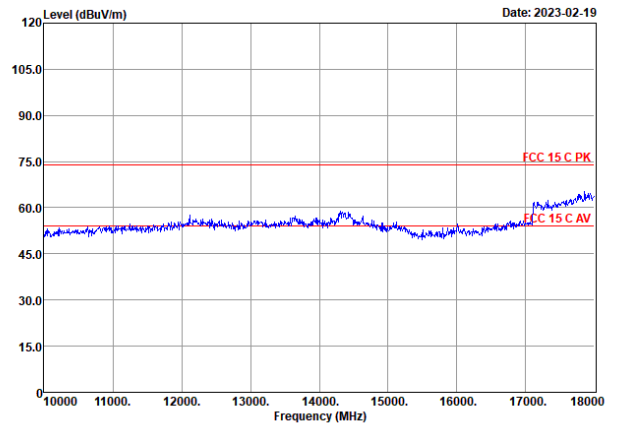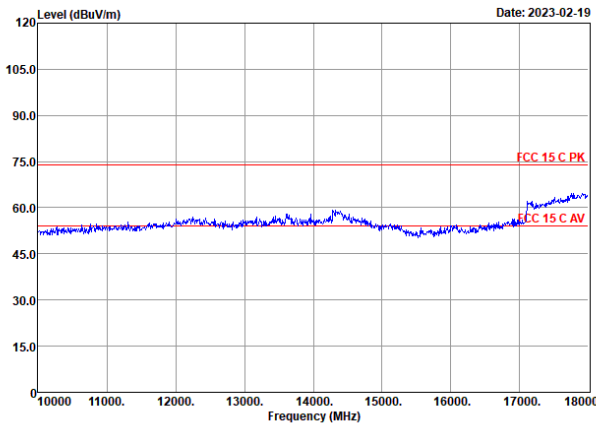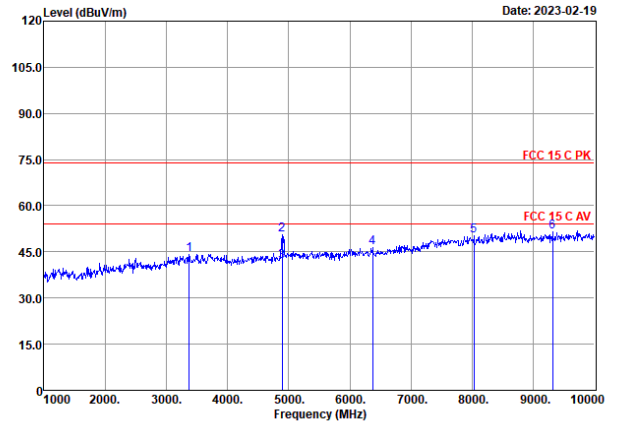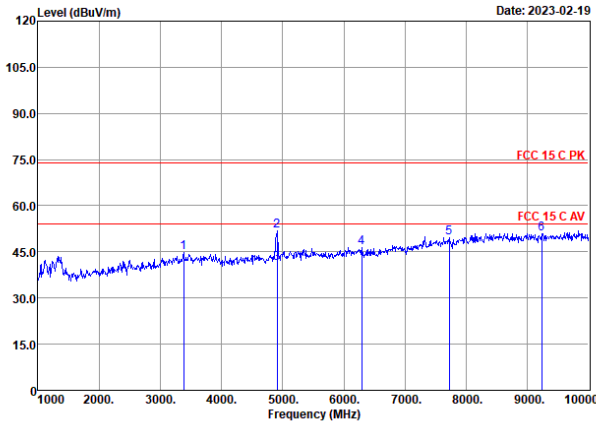

Horizontal

Vertical


Polarization	Frequency (MHz)	Meter Reading dB (μV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Emission Level dB (μV/m)	Limits dB (μV/m)	Margin (dB)	Remark
Horizontal	3385	42.48	31.2	6.27	35.27	44.68	74	29.32	Peak
	4906	45.67	33.2	7.61	34.74	51.74	74	22.26	Peak
	4906	35.08	33.2	7.61	34.74	41.15	54	12.85	Average
	6292	38.02	34.6	8.68	34.77	46.53	74	27.47	Peak
	7723	37.19	37.05	10.01	34.7	49.55	74	24.45	Peak
	9235	36.54	38.2	10.88	34.68	50.94	74	23.06	Peak
Vertical	3376	42	31.2	6.27	35.28	44.19	74	29.81	Peak
	4897	44.34	33.2	7.61	34.74	50.41	74	23.59	Peak
	4897	35.76	33.2	7.61	34.74	41.83	54	12.17	Average
	6373	37.93	34.5	8.68	34.76	46.35	74	27.65	Peak
	8029	37.12	37.63	10.22	34.7	50.27	74	23.73	Peak
	9316	37.23	38	10.97	34.67	51.53	74	22.47	Peak

TEST ENGINEER: Jarey


Band-Edge:

EUT : LED Lamp Temperature : 22°C
 Model No. : 9290032676 Humidity : 51%RH
 Test Mode : Transmitting Date of Test : 2023.02.19

802.11b CH2412MHz

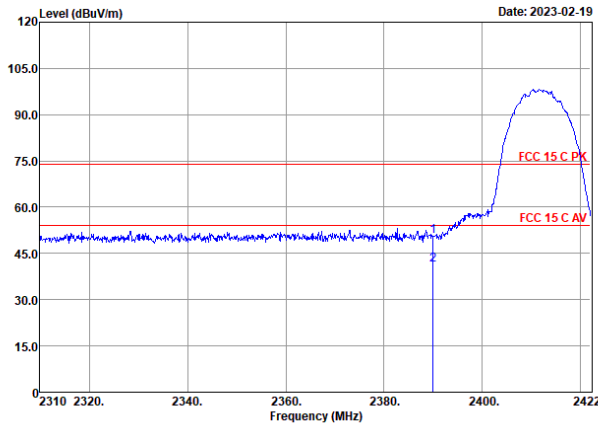


Horizontal

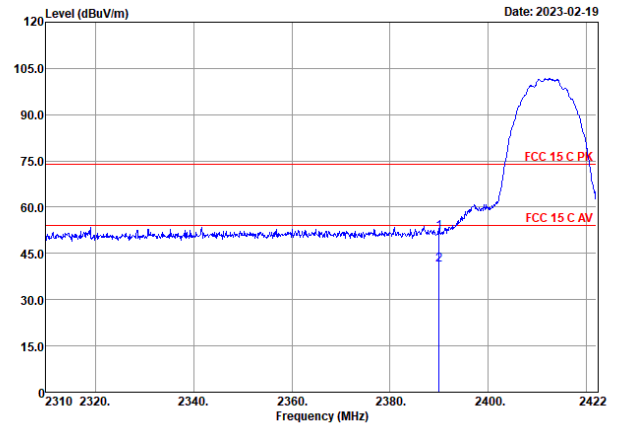


Vertical

Polarization	Frequency (MHz)	Meter Reading dB (μV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Emission Level dB (μV/m)	Limits dB (μV/m)	Margin (dB)	Remark
Horizontal	2390	52.81	28.4	5.36	35.9	50.67	74	23.33	Peak
	2390	43.58	28.4	5.36	35.9	41.44	54	12.56	Average
Vertical	2390	54.07	28.4	5.36	35.9	51.93	74	22.07	Peak
	2390	43.5	28.4	5.36	35.9	41.36	54	12.64	Average

802.11b CH2462MHz

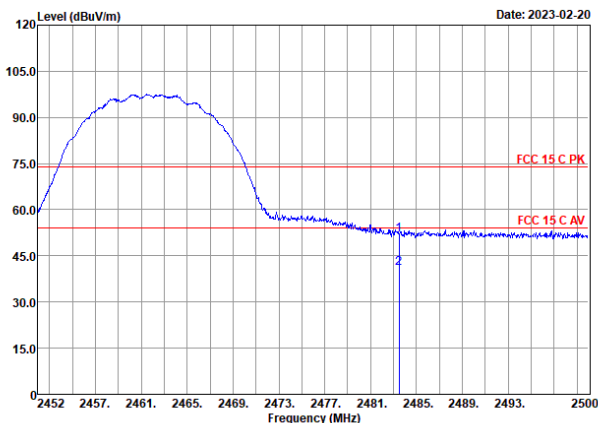


Horizontal

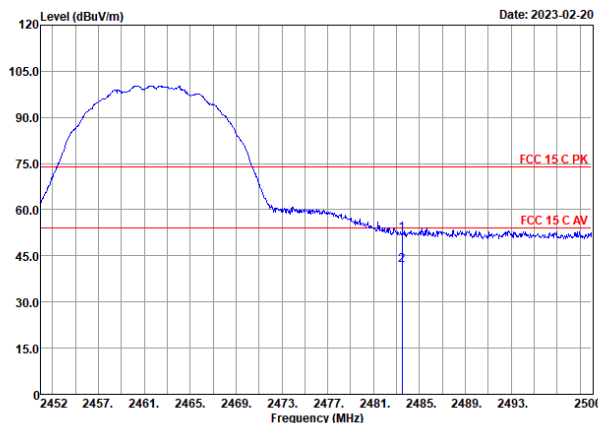


Vertical

Polarization	Frequency (MHz)	Meter Reading dB (μV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Emission Level dB (μV/m)	Limits dB (μV/m)	Margin (dB)	Remark
Horizontal	2483.5	53.87	28.44	5.43	35.82	51.92	74	22.08	Peak
	2483.5	42.99	28.44	5.43	35.82	41.04	54	12.96	Average
Vertical	2483.5	54.23	28.44	5.43	35.82	52.28	74	21.72	Peak
	2483.5	43.9	28.44	5.43	35.82	41.95	54	12.05	Average

802.11g CH2412MHz

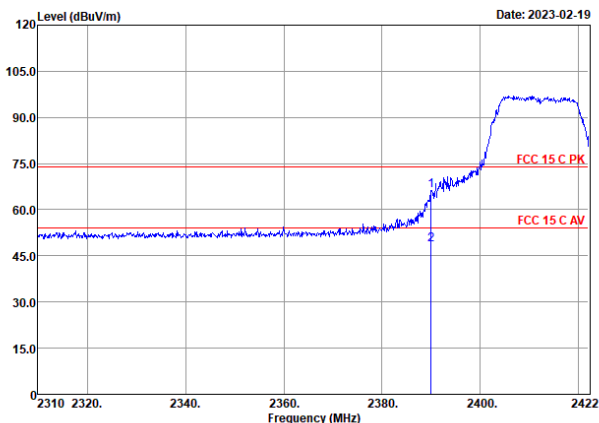


Horizontal

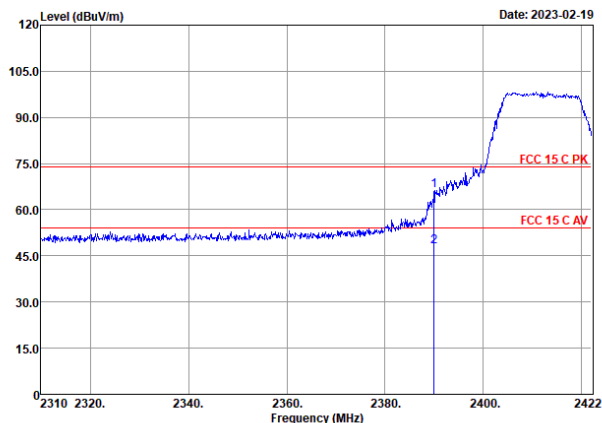


Vertical

Polarization	Frequency (MHz)	Meter Reading dB (μV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Emission Level dB (μV/m)	Limits dB (μV/m)	Margin (dB)	Remark
Horizontal	2390	68.39	28.4	5.36	35.9	66.25	74	7.75	Peak
	2390	50.72	28.4	5.36	35.9	48.58	54	5.42	Average
Vertical	2390	68.51	28.4	5.36	35.9	66.37	74	7.63	Peak
	2390	50.28	28.4	5.36	35.9	48.14	54	5.86	Average

802.11g CH2462MHz

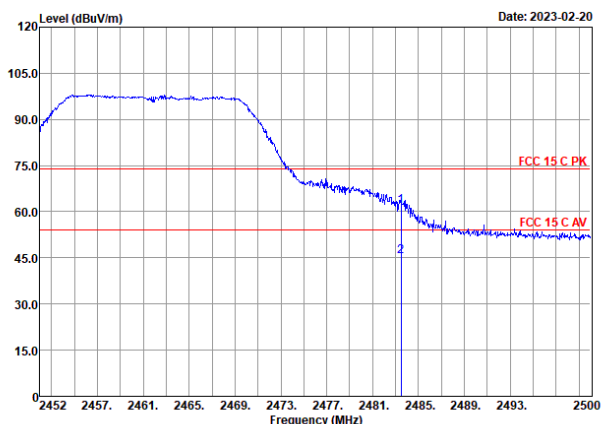


Horizontal

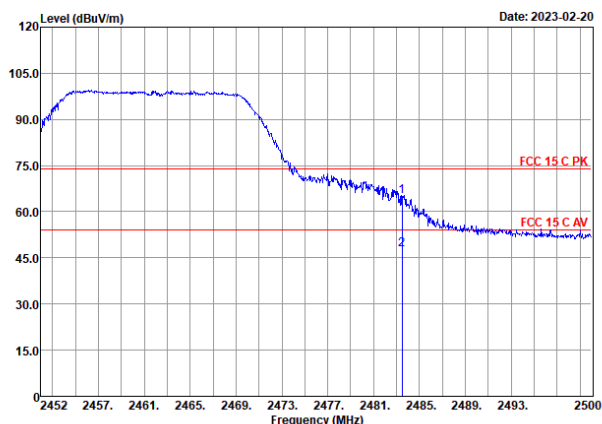


Vertical

Polarization	Frequency (MHz)	Meter Reading dB (μV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Emission Level dB (μV/m)	Limits dB (μV/m)	Margin (dB)	Remark
Horizontal	2483.5	63.81	28.44	5.43	35.82	61.86	74	12.14	Peak
	2483.5	47.38	28.44	5.43	35.82	45.43	54	8.57	Average
Vertical	2483.5	66.98	28.44	5.43	35.82	65.03	74	8.97	Peak
	2483.5	49.61	28.44	5.43	35.82	47.66	54	6.34	Average

802.11n20 CH2412MHz

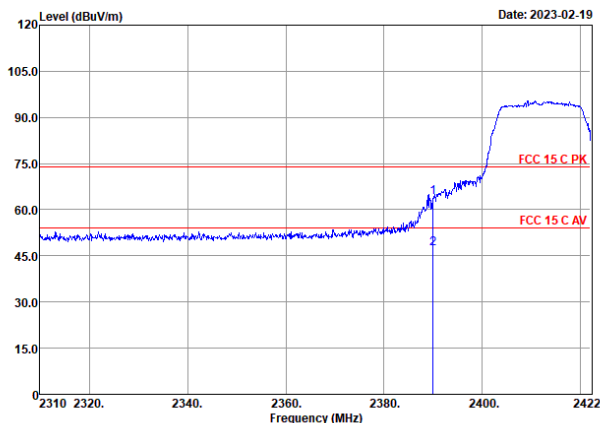


Horizontal

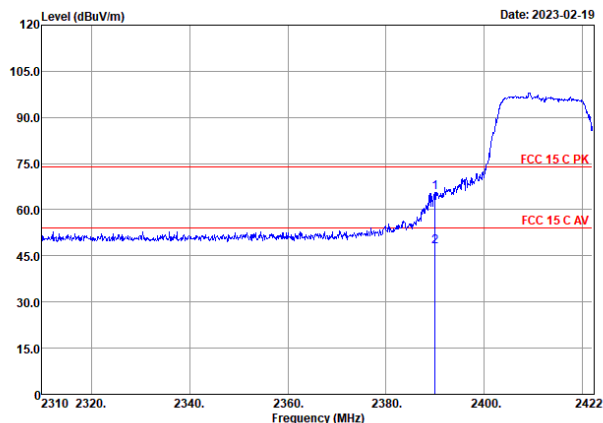


Vertical

Polarization	Frequency (MHz)	Meter Reading dB (μV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Emission Level dB (μV/m)	Limits dB (μV/m)	Margin (dB)	Remark
Horizontal	2390	65.98	28.4	5.36	35.9	63.84	74	10.16	Peak
	2390	49.58	28.4	5.36	35.9	47.44	54	6.56	Average
Vertical	2390	67.89	28.4	5.36	35.9	65.75	74	8.25	Peak
	2390	50.12	28.4	5.36	35.9	47.98	54	6.02	Average

802.11n20 CH2462MHz

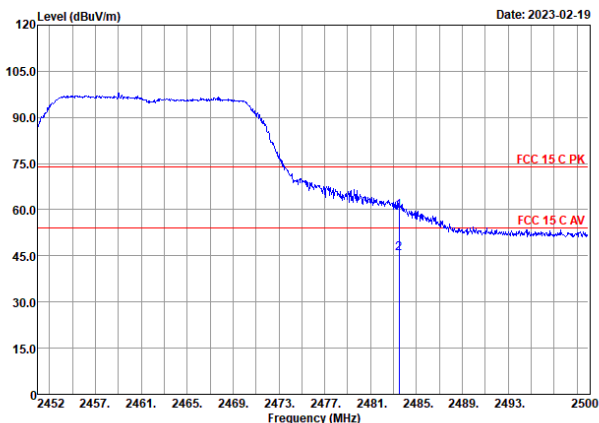


Horizontal

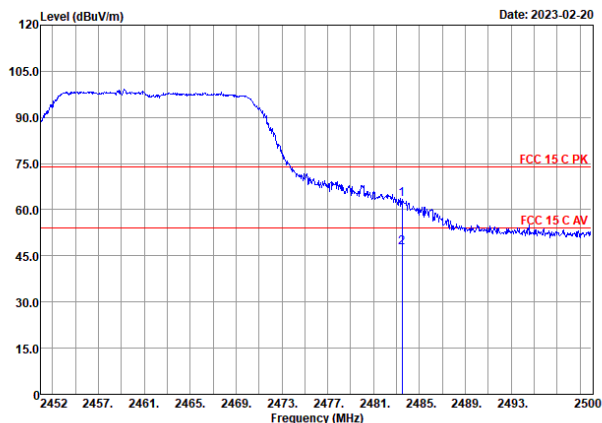


Vertical

Polarization	Frequency (MHz)	Meter Reading dB (μV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Emission Level dB (μV/m)	Limits dB (μV/m)	Margin (dB)	Remark
Horizontal	2483.5	61.47	28.44	5.43	35.82	59.52	74	14.48	Peak
	2483.5	47.8	28.44	5.43	35.82	45.85	54	8.15	Average
Vertical	2483.5	65.18	28.44	5.43	35.82	63.23	74	10.77	Peak
	2483.5	49.58	28.44	5.43	35.82	47.63	54	6.37	Average

802.11n40 CH2422MHz

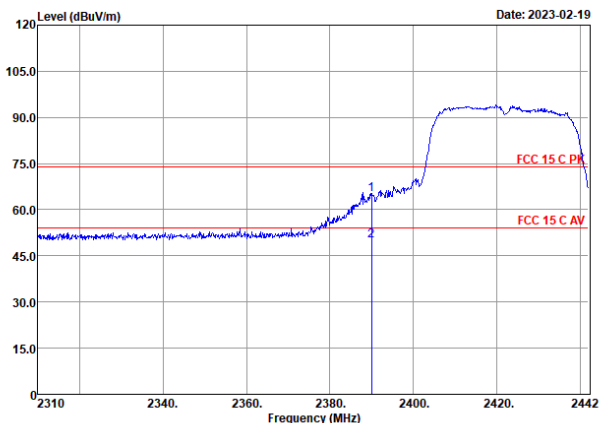


Horizontal

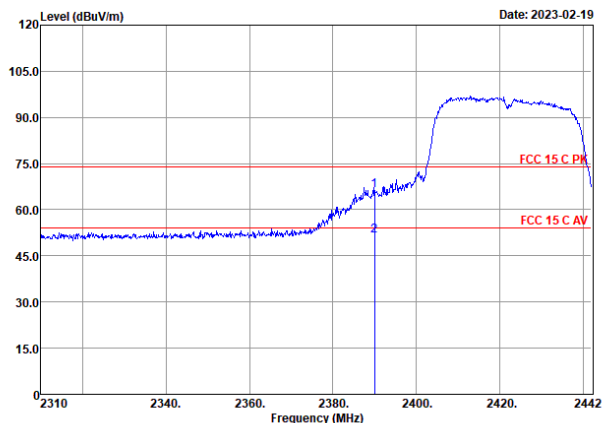


Vertical

Polarization	Frequency (MHz)	Meter Reading dB (μV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Emission Level dB (μV/m)	Limits dB (μV/m)	Margin (dB)	Remark
Horizontal	2390	67.23	28.4	5.36	35.9	65.09	74	8.91	Peak
	2390	51.92	28.4	5.36	35.9	49.78	54	4.22	Average
Vertical	2390	68.48	28.4	5.36	35.9	66.34	74	7.66	Peak
	2390	53.56	28.4	5.36	35.9	51.42	54	2.58	Average

802.11n40 CH2452MHz

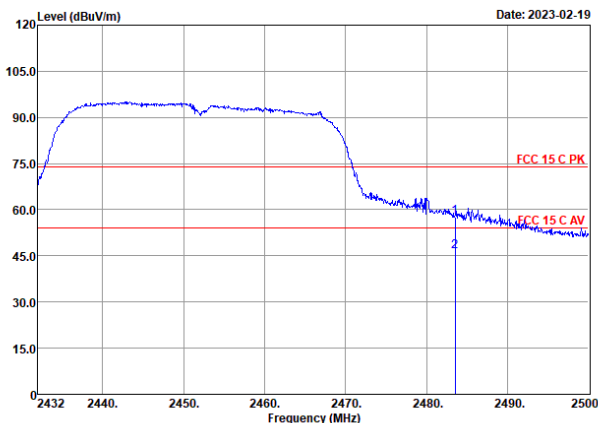

Horizontal

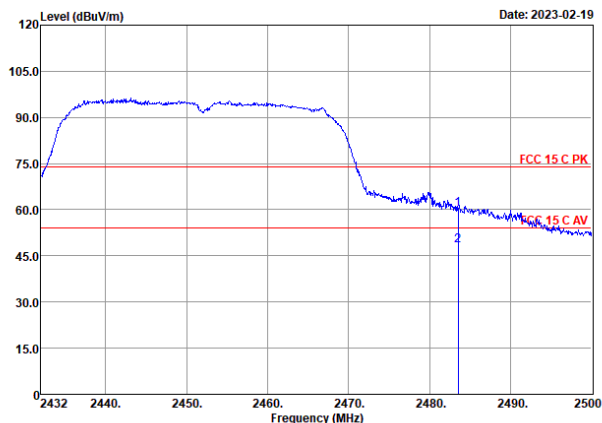


Vertical

Polarization	Frequency (MHz)	Meter Reading dB (μV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Emission Level dB (μV/m)	Limits dB (μV/m)	Margin (dB)	Remark
Horizontal	2483.5	59.43	28.44	5.43	35.82	57.48	74	16.52	Peak
	2483.5	48.44	28.44	5.43	35.82	46.49	54	7.51	Average
Vertical	2483.5	61.95	28.44	5.43	35.82	60	74	14	Peak
	2483.5	50.3	28.44	5.43	35.82	48.35	54	5.65	Average


Emissions in restricted frequency bands:

EUT : LED Lamp Temperature : 22°C
 Model No. : 9290032676 Humidity : 51%RH
 Test Mode : Transmitting Date of Test : 2023.02.19

802.11b CH2412MHz

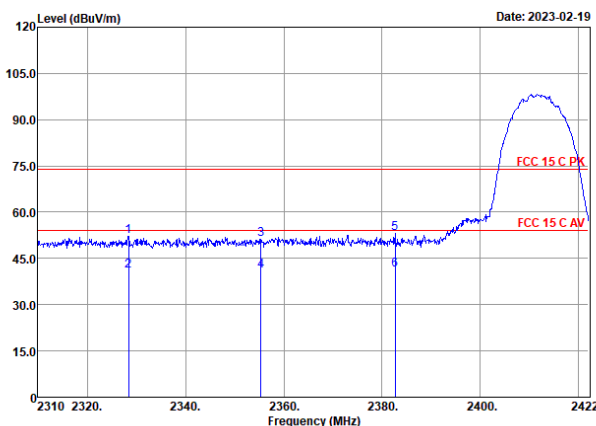


Horizontal

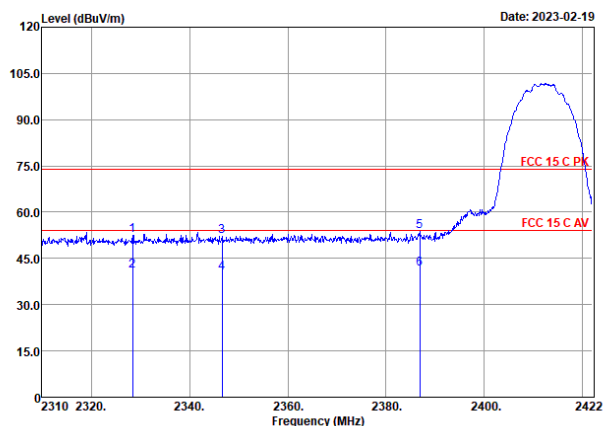


Vertical

Polarization	Frequency (MHz)	Meter Reading dB (μV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Emission Level dB (μV/m)	Limits dB (μV/m)	Margin (dB)	Remark
Horizontal	2328.48	54.47	28.25	5.29	35.96	52.05	74	21.95	Peak
	2328.48	43.34	28.25	5.29	35.96	40.92	54	13.08	Average
	2355.36	53.38	28.4	5.32	35.94	51.16	74	22.84	Peak
	2355.36	43.24	28.4	5.32	35.94	41.02	54	12.98	Average
	2382.69	55.22	28.4	5.36	35.91	53.07	74	20.93	Peak
2382.69	43.52	28.4	5.36	35.91	41.37	54	12.63	Average	
Vertical	2328.48	55	28.25	5.29	35.96	52.58	74	21.42	Peak
	2328.48	43.4	28.25	5.29	35.96	40.98	54	13.02	Average
	2346.62	54.59	28.36	5.32	35.95	52.32	74	21.68	Peak
	2346.62	42.55	28.36	5.32	35.95	40.28	54	13.72	Average
	2386.83	55.96	28.4	5.36	35.91	53.81	74	20.19	Peak
2386.83	43.59	28.4	5.36	35.91	41.44	54	12.56	Average	

802.11b CH2462MHz

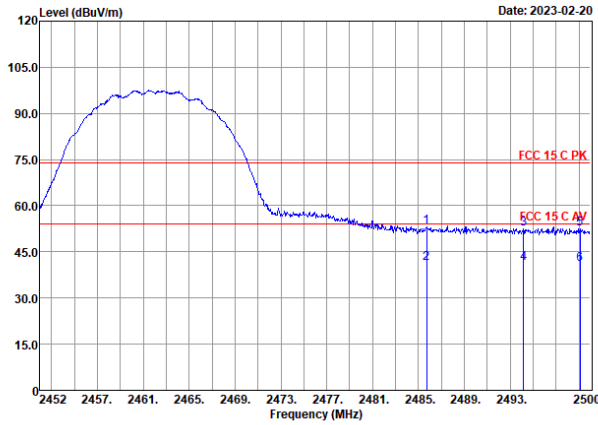


Horizontal

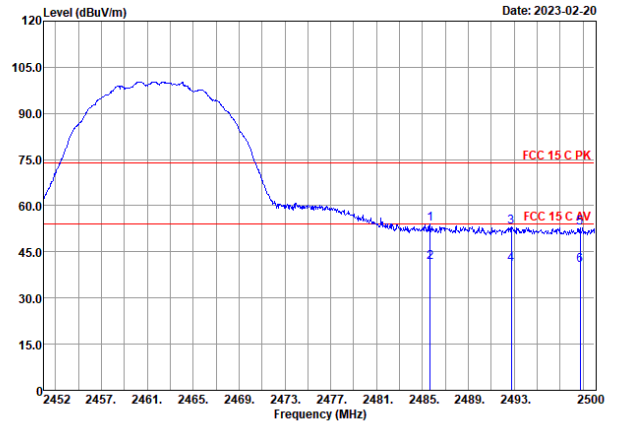


Vertical

Polarization	Frequency (MHz)	Meter Reading dB (μV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Emission Level dB (μV/m)	Limits dB (μV/m)	Margin (dB)	Remark
Horizontal	2485.7	55.02	28.44	5.47	35.82	53.11	74	20.89	Peak
	2485.7	43.03	28.44	5.47	35.82	41.12	54	12.88	Average
	2494.14	54.37	28.47	5.47	35.81	52.5	74	21.5	Peak
	2494.14	43.23	28.47	5.47	35.81	41.36	54	12.64	Average
	2499.09	54.46	28.5	5.47	35.81	52.62	74	21.38	Peak
	2499.09	42.64	28.5	5.47	35.81	40.8	54	13.2	Average
Vertical	2485.65	55.86	28.44	5.47	35.82	53.95	74	20.05	Peak
	2485.65	43.59	28.44	5.47	35.82	41.68	54	12.32	Average
	2492.75	54.93	28.47	5.47	35.81	53.06	74	20.94	Peak
	2492.75	42.79	28.47	5.47	35.81	40.92	54	13.08	Average
	2498.75	54.63	28.5	5.47	35.81	52.79	74	21.21	Peak
	2498.75	42.46	28.5	5.47	35.81	40.62	54	13.38	Average

802.11g CH2412MHz

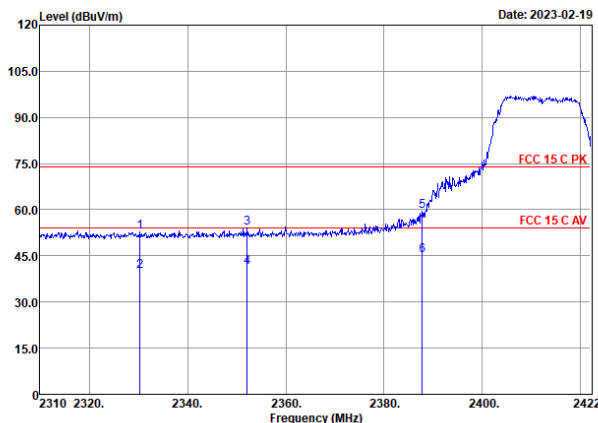


Horizontal

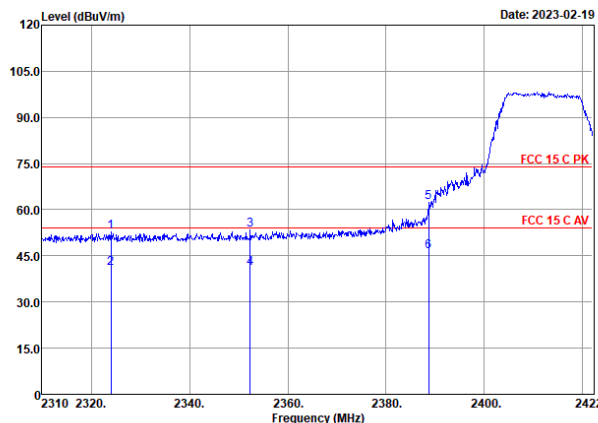


Vertical

Polarization	Frequency (MHz)	Meter Reading dB (μV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Emission Level dB (μV/m)	Limits dB (μV/m)	Margin (dB)	Remark
Horizontal	2330.38	55.18	28.29	5.29	35.96	52.8	74	21.2	Peak
	2330.38	42.41	28.29	5.29	35.96	40.03	54	13.97	Average
	2352.11	56.3	28.4	5.32	35.94	54.08	74	19.92	Peak
	2352.11	43.43	28.4	5.32	35.94	41.21	54	12.79	Average
	2387.73	61.75	28.4	5.36	35.9	59.61	74	14.39	Peak
	2387.73	47.37	28.4	5.36	35.9	45.23	54	8.77	Average
Vertical	2324	55.28	28.25	5.29	35.97	52.85	74	21.15	Peak
	2324	43.53	28.25	5.29	35.97	41.1	54	12.9	Average
	2352.34	55.56	28.4	5.32	35.94	53.34	74	20.66	Peak
	2352.34	43.26	28.4	5.32	35.94	41.04	54	12.96	Average
	2388.62	64.62	28.4	5.36	35.9	62.48	74	11.52	Peak
	2388.62	48.56	28.4	5.36	35.9	46.42	54	7.58	Average

802.11g CH2462MHz

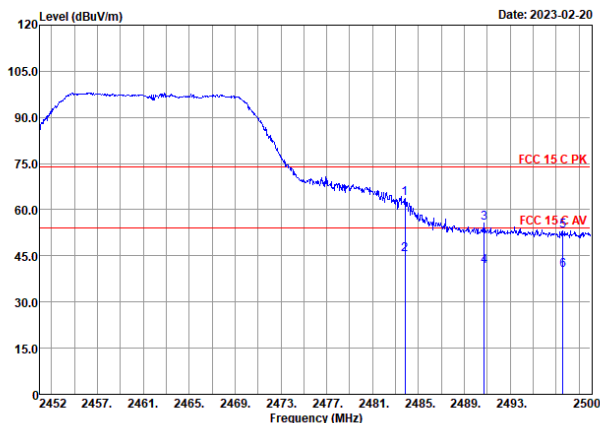


Horizontal

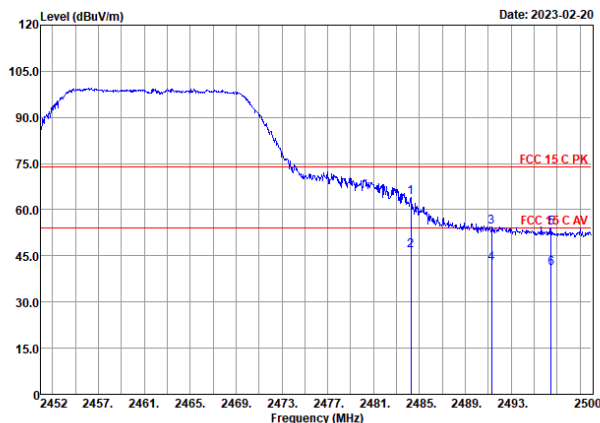


Vertical

Polarization	Frequency (MHz)	Meter Reading dB (μV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Emission Level dB (μV/m)	Limits dB (μV/m)	Margin (dB)	Remark
Horizontal	2483.82	65.59	28.44	5.43	35.82	63.64	74	10.36	Peak
	2483.82	47.46	28.44	5.43	35.82	45.51	54	8.49	Average
	2490.74	57.49	28.47	5.47	35.82	55.61	74	18.39	Peak
	2490.74	43.55	28.47	5.47	35.82	41.67	54	12.33	Average
	2497.6	54.91	28.5	5.47	35.81	53.07	74	20.93	Peak
	2497.6	42.29	28.5	5.47	35.81	40.45	54	13.55	Average
Vertical	2484.26	65.83	28.44	5.47	35.82	63.92	74	10.08	Peak
	2484.26	48.58	28.44	5.47	35.82	46.67	54	7.33	Average
	2491.26	56.33	28.47	5.47	35.81	54.46	74	19.54	Peak
	2491.26	44.33	28.47	5.47	35.81	42.46	54	11.54	Average
	2496.45	55.79	28.5	5.47	35.81	53.95	74	20.05	Peak
	2496.45	42.78	28.5	5.47	35.81	40.94	54	13.06	Average

802.11n20 CH2412MHz

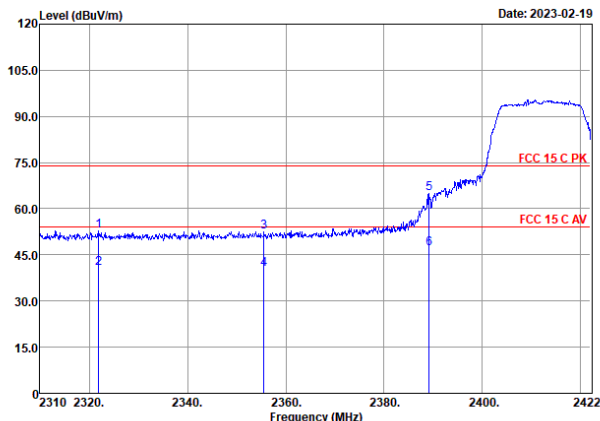


Horizontal

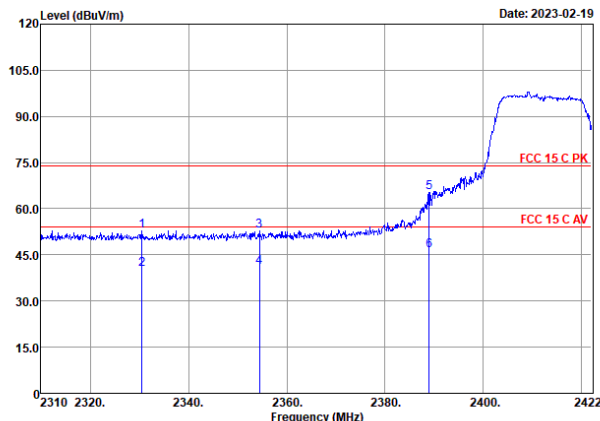


Vertical

Polarization	Frequency (MHz)	Meter Reading dB (μV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Emission Level dB (μV/m)	Limits dB (μV/m)	Margin (dB)	Remark
Horizontal	2321.98	55.3	28.21	5.29	35.97	52.83	74	21.17	Peak
	2321.98	43.23	28.21	5.29	35.97	40.76	54	13.24	Average
	2355.58	54.83	28.4	5.32	35.94	52.61	74	21.39	Peak
	2355.58	42.59	28.4	5.32	35.94	40.37	54	13.63	Average
	2389.18	67.01	28.4	5.36	35.9	64.87	74	9.13	Peak
	2389.18	49.2	28.4	5.36	35.9	47.06	54	6.94	Average
Vertical	2330.5	55.22	28.29	5.29	35.96	52.84	74	21.16	Peak
	2330.5	42.56	28.29	5.29	35.96	40.18	54	13.82	Average
	2354.46	55.17	28.4	5.32	35.94	52.95	74	21.05	Peak
	2354.46	43.22	28.4	5.32	35.94	41	54	13	Average
	2388.96	67.56	28.4	5.36	35.9	65.42	74	8.58	Peak
	2388.96	48.45	28.4	5.36	35.9	46.31	54	7.69	Average

802.11n20 CH2462MHz

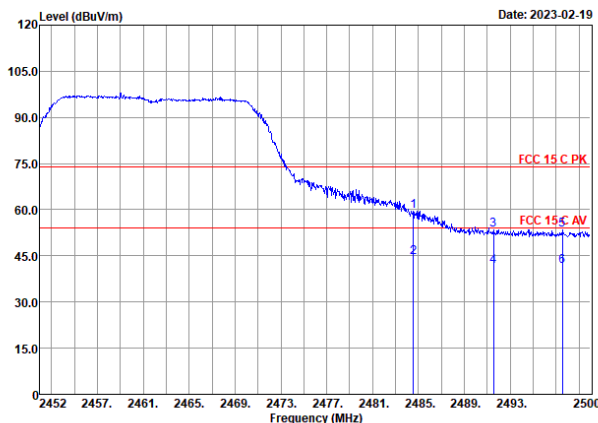

Horizontal

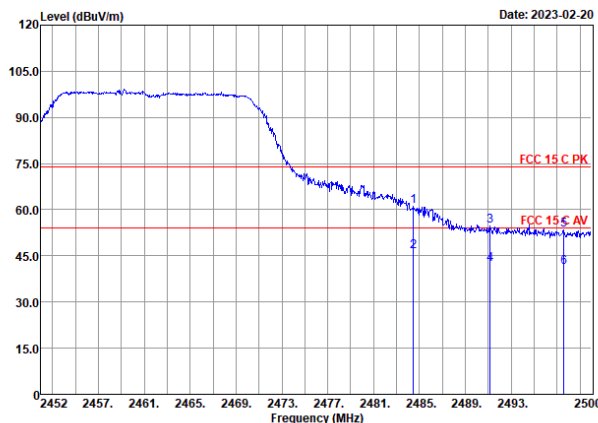


Vertical


Polarization	Frequency (MHz)	Meter Reading dB (μV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Emission Level dB (μV/m)	Limits dB (μV/m)	Margin (dB)	Remark
Horizontal	2484.54	61.57	28.44	5.47	35.82	59.66	74	14.34	Peak
	2484.54	46.36	28.44	5.47	35.82	44.45	54	9.55	Average
	2491.55	55.36	28.47	5.47	35.81	53.49	74	20.51	Peak
	2491.55	43.43	28.47	5.47	35.81	41.56	54	12.44	Average
	2497.55	55.27	28.5	5.47	35.81	53.43	74	20.57	Peak
	2497.55	43.52	28.5	5.47	35.81	41.68	54	12.32	Average
Vertical	2484.45	63.1	28.44	5.47	35.82	61.19	74	12.81	Peak
	2484.45	48.31	28.44	5.47	35.82	46.4	54	7.6	Average
	2491.17	56.48	28.47	5.47	35.81	54.61	74	19.39	Peak
	2491.17	44.15	28.47	5.47	35.81	42.28	54	11.72	Average
	2497.6	55.35	28.5	5.47	35.81	53.51	74	20.49	Peak
	2497.6	43.23	28.5	5.47	35.81	41.39	54	12.61	Average

TEST ENGINEER: Jarey

802.11n40 CH2422MHz

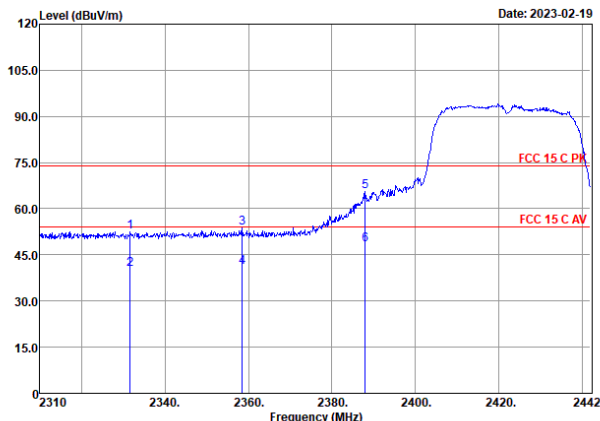


Horizontal

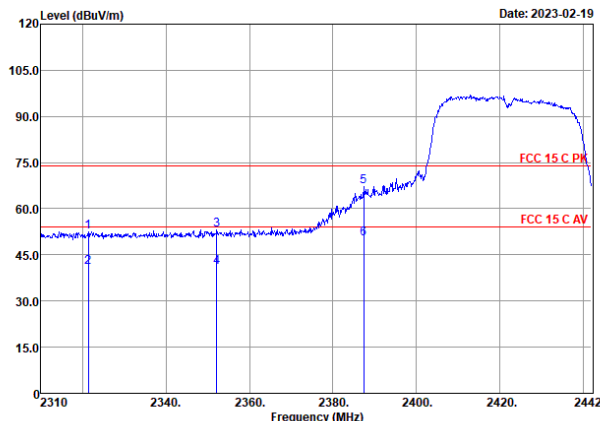


Vertical

Polarization	Frequency (MHz)	Meter Reading dB (μV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Emission Level dB (μV/m)	Limits dB (μV/m)	Margin (dB)	Remark
Horizontal	2331.65	54.75	28.29	5.29	35.96	52.37	74	21.63	Peak
	2331.65	42.57	28.29	5.29	35.96	40.19	54	13.81	Average
	2358.44	55.84	28.4	5.32	35.93	53.63	74	20.37	Peak
	2358.44	43.28	28.4	5.32	35.93	41.07	54	12.93	Average
	2388.01	67.67	28.4	5.36	35.9	65.53	74	8.47	Peak
	2388.01	50.46	28.4	5.36	35.9	48.32	54	5.68	Average
Vertical	2321.35	55.05	28.21	5.29	35.97	52.58	74	21.42	Peak
	2321.35	43.31	28.21	5.29	35.97	40.84	54	13.16	Average
	2352.11	55.44	28.4	5.32	35.94	53.22	74	20.78	Peak
	2352.11	43.25	28.4	5.32	35.94	41.03	54	12.97	Average
	2387.35	69.32	28.4	5.36	35.9	67.18	74	6.82	Peak
	2387.35	52.53	28.4	5.36	35.9	50.39	54	3.61	Average

802.11n40 CH2452MHz

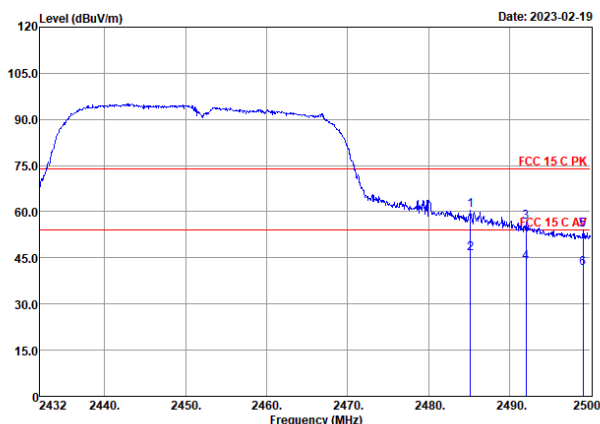

Horizontal

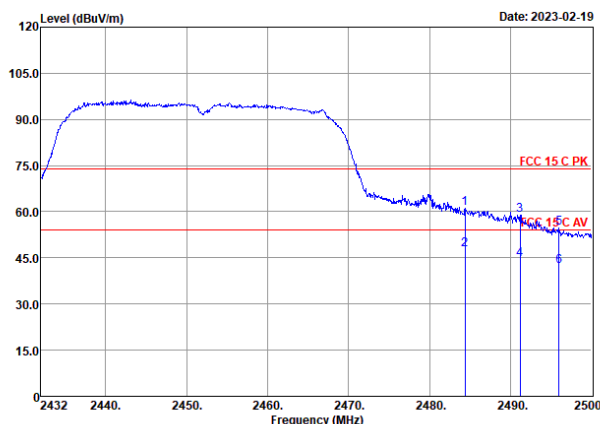

Vertical

Polarization	Frequency (MHz)	Meter Reading dB (μV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Emission Level dB (μV/m)	Limits dB (μV/m)	Margin (dB)	Remark
Horizontal	2485.18	62.42	28.44	5.47	35.82	60.51	74	13.49	Peak
	2485.18	48.34	28.44	5.47	35.82	46.43	54	7.57	Average
	2492.04	58.55	28.47	5.47	35.81	56.68	74	17.32	Peak
	2492.04	45.25	28.47	5.47	35.81	43.38	54	10.62	Average
	2499.05	56.03	28.5	5.47	35.81	54.19	74	19.81	Peak
	2499.05	43.3	28.5	5.47	35.81	41.46	54	12.54	Average
Vertical	2484.36	62.96	28.44	5.47	35.82	61.05	74	12.95	Peak
	2484.36	49.5	28.44	5.47	35.82	47.59	54	6.41	Average
	2491.16	60.64	28.47	5.47	35.81	58.77	74	15.23	Peak
	2491.16	46.36	28.47	5.47	35.81	44.49	54	9.51	Average
	2495.99	56.55	28.47	5.47	35.81	54.68	74	19.32	Peak
	2495.99	44.25	28.47	5.47	35.81	42.38	54	11.62	Average

TEST ENGINEER: Jarey


5 99% OCCUPIED BANDWIDTH MEASUREMENT

5.1 Test Equipment

The following test equipment was used during the Emission Bandwidth measurement:

Item	Type	Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Interval
1.	Spectrum Analyzer	Agilent	N9010A	MY52221182	2022.09.15	1 Year
2.	Coaxial Cable	WOKEN	SFL402-105F LEX	F02-150819- 045	2023.02.22	1 Year
3.	20 dB Attenuator	Mini-Circuits	BW-S20W2+	001	2022.08.06	1 Year

5.2 Block Diagram of Test Setup



5.3 Operating Condition of EUT

The software as section 2.3 was used to enable the EUT to change the test mode one by one.

5.4 Test Procedure

The transmitter output was connected to the spectrum analyzer. The bandwidth of 99% power bandwidth was measure by spectrum analyzer with settings: Span = between 1.5 times and 5.0 times of the OBW, RBW = 1% to 5% of the OBW, VBW $\geq 3 \times$ RBW, Detector = Peak, Trace = Max Hold.

Use the 99% power bandwidth function of the instrument and report the measured bandwidth.

The test procedure is defined in ANSI C63.10-2013 (the 6.9.3 Measurement Procedure “Occupied bandwidth—power bandwidth (99%) measurement procedure” was used).

5.5 Test Results

PASSED.

All the test results are attached in next pages.

(Test Date: 2023.02.22 Temperature: 23°C Humidity: 51 %)

Mode	Channel	Frequency (MHz)	99% Bandwidth (MHz)
802.11b	1	2412	13.079
	6	2437	12.986
	11	2462	12.984
802.11g	1	2412	18.229
	6	2437	18.138
	11	2462	18.293
802.11n20	1	2412	18.581
	6	2437	18.568
	11	2462	18.583
802.11n40	3	2422	34.957
	6	2437	34.922
	9	2452	34.934

802.11b CH2412MHz



802.11b CH2437MHz



802.11b CH2462MHz




802.11g CH2412MHz




802.11g CH2437MHz




802.11g CH2462MHz

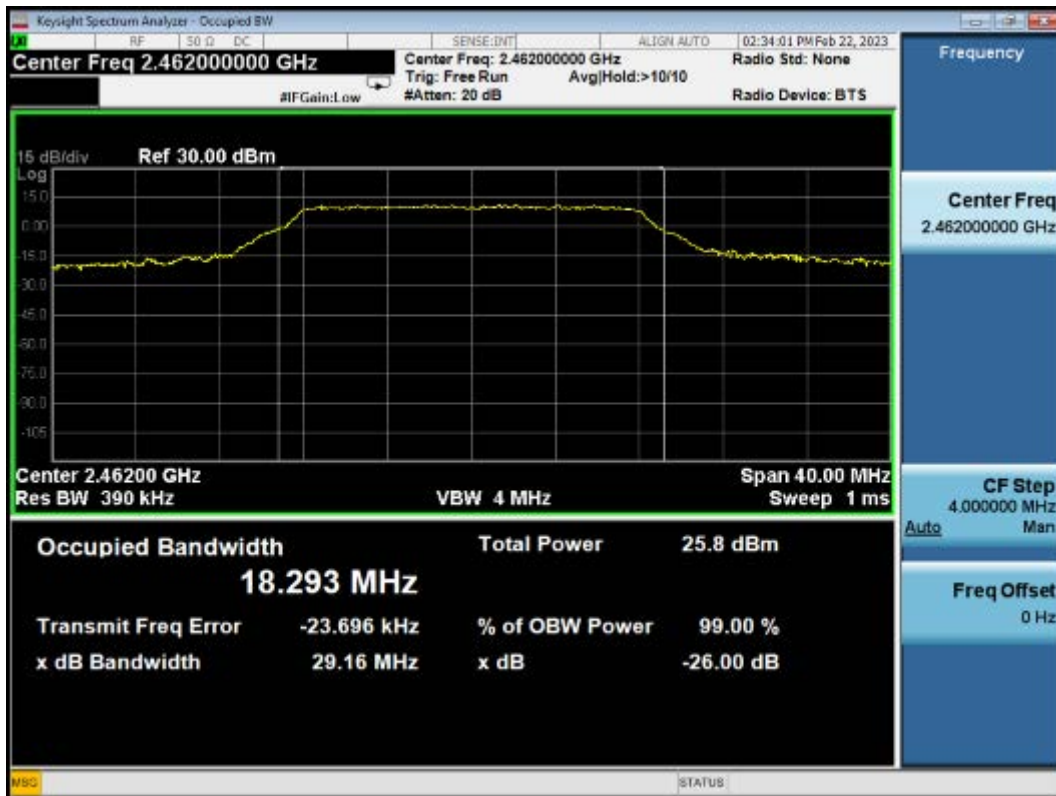

802.11n20 CH2412MHz

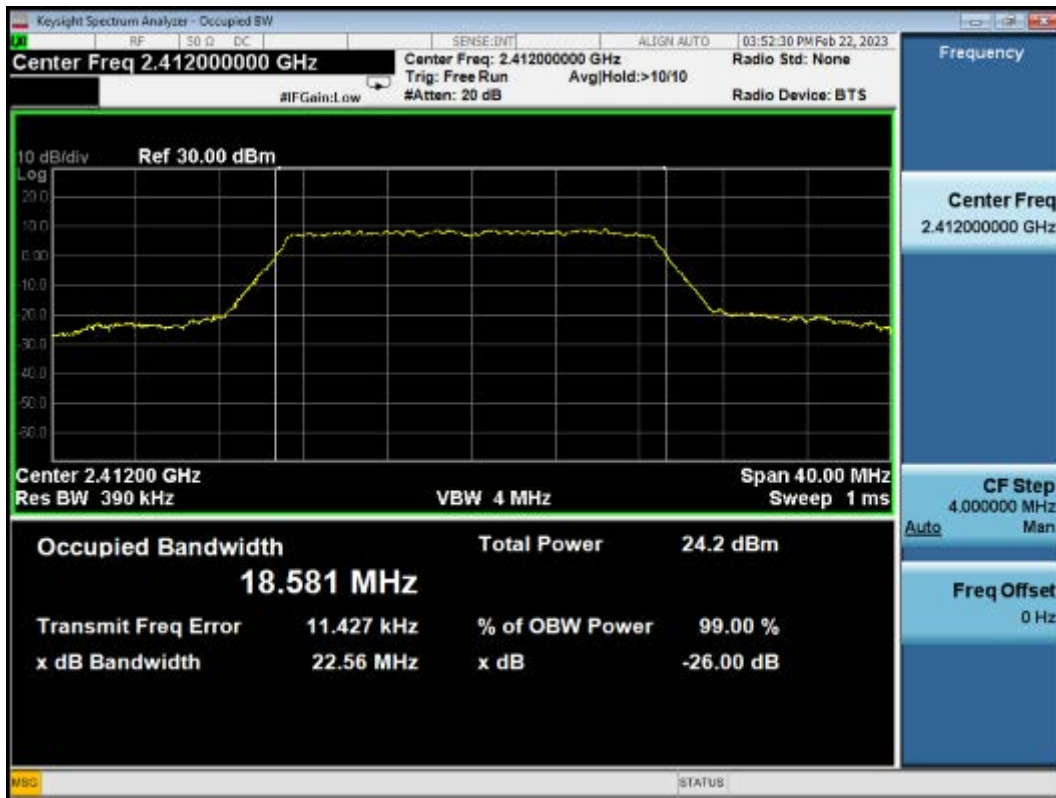


802.11n20 CH2437MHz

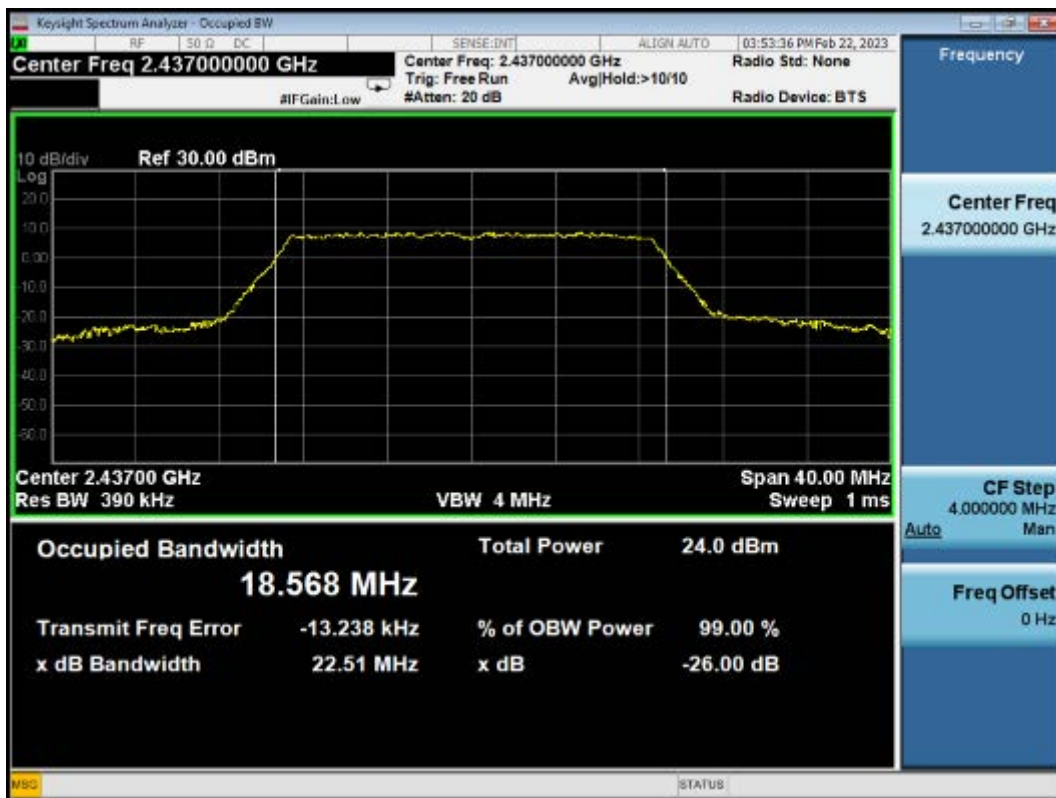

802.11n20 CH2462MHz




802.11n40 CH2422MHz

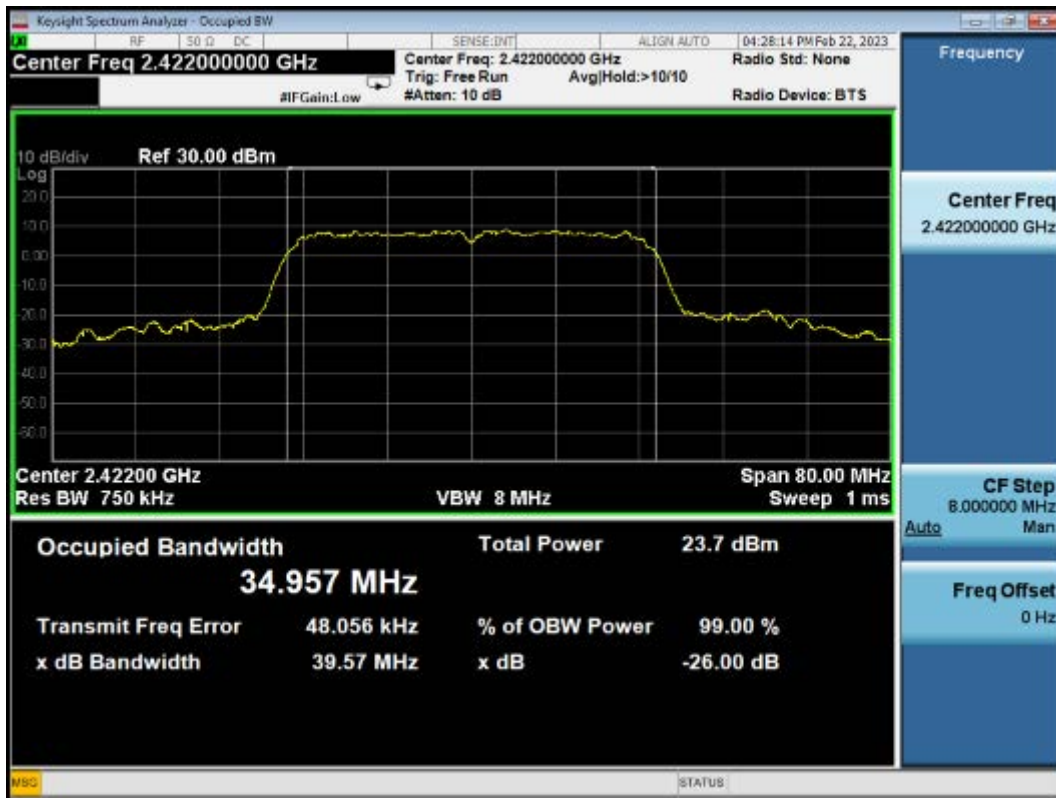

802.11n40 CH2437MHz



802.11n40 CH2452MHz

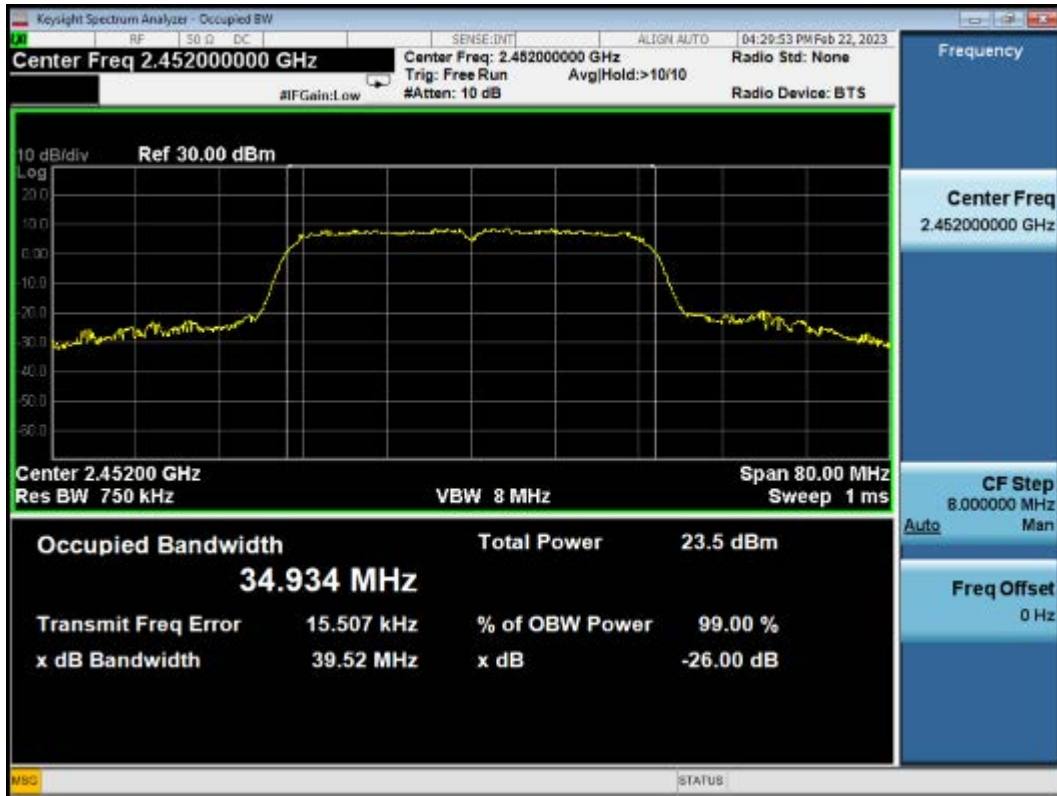

6 6 dB BANDWIDTH MEASUREMENT

6.1 Test Equipment

The following test equipment was used during the Emission Bandwidth measurement:

Item	Type	Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Interval
1.	Spectrum Analyzer	Agilent	N9010A	MY52221182	2022.09.15	1 Year
2.	Coaxial Cable	WOKEN	SFL402-105F LEX	F02-150819- 045	2023.02.22	1 Year
3.	20 dB Attenuator	Mini-Circuits	BW-S20W2+	001	2022.08.06	1 Year

6.2 Block Diagram of Test Setup

The Same as Section. 5.2.

6.3 Specification Limits (§15.247(a)(2))

The minimum 6 dB bandwidth shall be at least 500 kHz.

6.4 Operating Condition of EUT

The software as section 2.3 was used to enable the EUT to change the test mode one by one.

6.5 Test Procedure

The transmitter output was connected to the spectrum analyzer. The bandwidth of the fundamental frequency was measure by spectrum analyzer with settings: RBW = 100kHz, VBW $\geq 3 \times$ RBW.

The 6 dB bandwidth is defined as the total spectrum the power of which is lower than peak power minus 6 dB .

The test procedure is defined in ANSI C63.10-2013 (the 11.8.2 Measurement Procedure “Option 2” was used).

6.6 Test Results

PASSED.

All the test results are attached in next pages.

(Test Date: 2023.02.22 Temperature: 23°C Humidity: 51 %)

Mode	Channel	Frequency (MHz)	6dB Bandwidth (MHz)	Limit
802.11b	1	2412	9.096	500 kHz
	6	2437	9.126	500 kHz
	11	2462	9.1	500 kHz
802.11g	1	2412	16.39	500 kHz
	6	2437	16.39	500 kHz
	11	2462	16.4	500 kHz
802.11n20	1	2412	17.65	500 kHz
	6	2437	17.62	500 kHz
	11	2462	17.64	500 kHz
802.11n40	3	2422	32.78	500 kHz
	6	2437	32.76	500 kHz
	9	2452	32.79	500 kHz

802.11b CH2412MHz




802.11b CH2437MHz



802.11b CH2462MHz



802.11g CH2412MHz

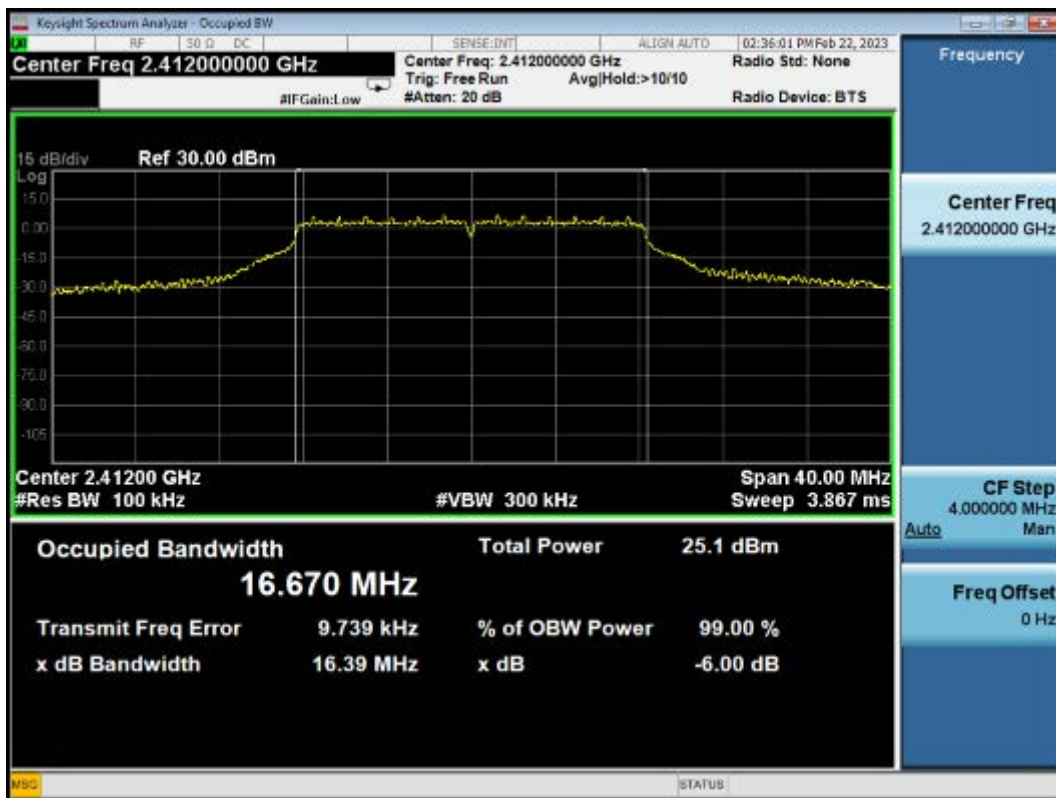


802.11g CH2437MHz




802.11g CH2462MHz




802.11n20 CH2412MHz

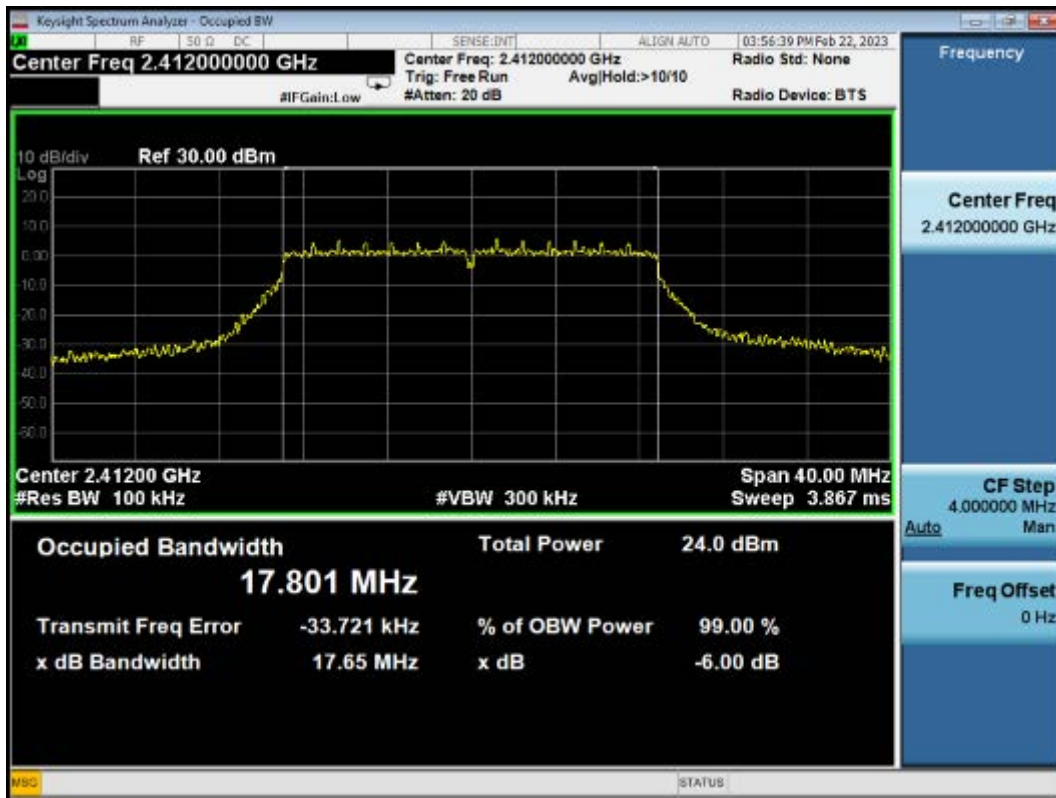


802.11n20 CH2437MHz

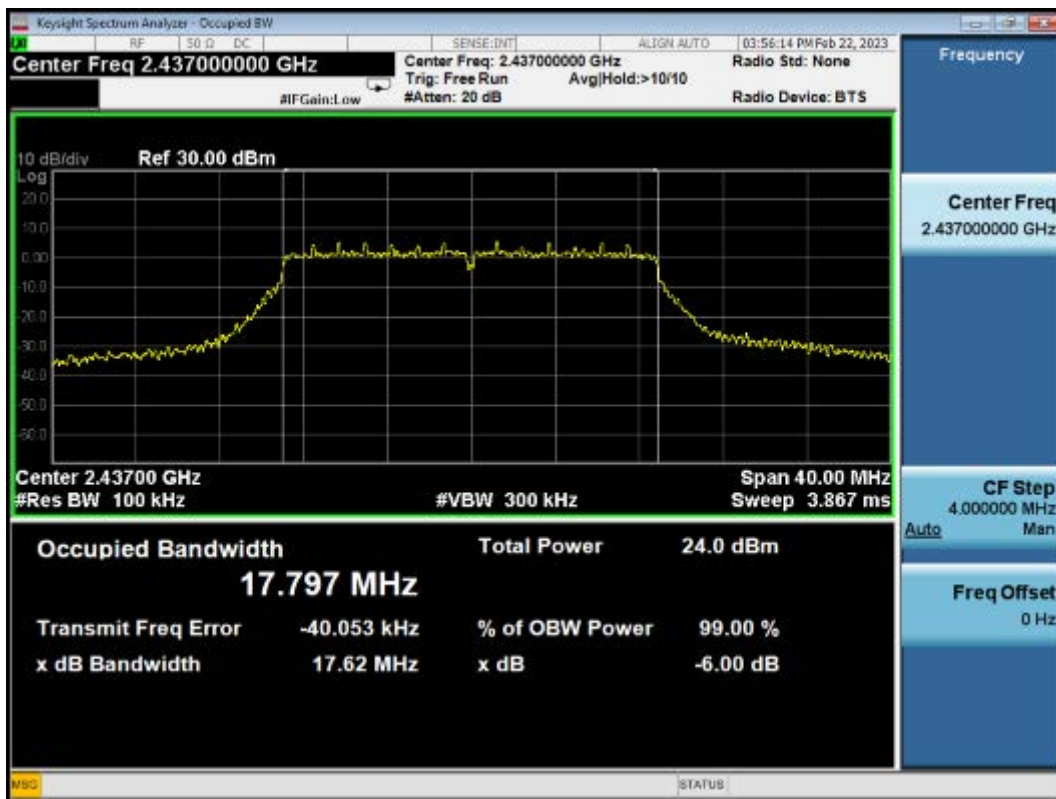

802.11n20 CH2462MHz

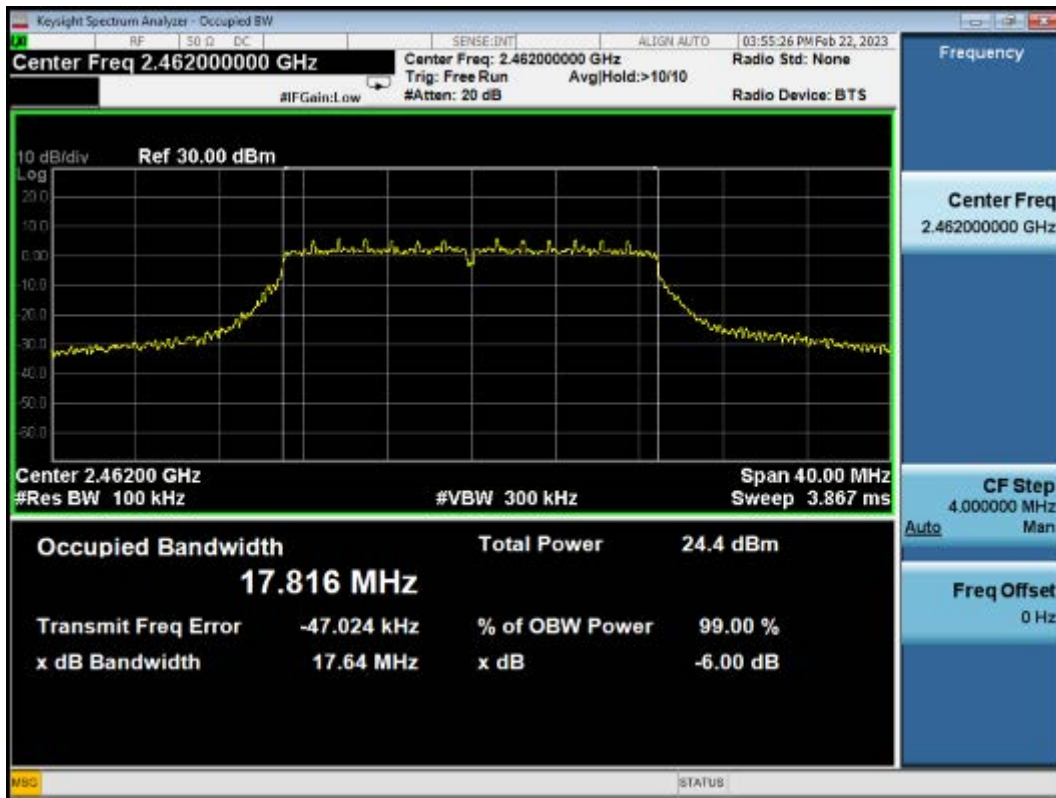


802.11n40 CH2422MHz

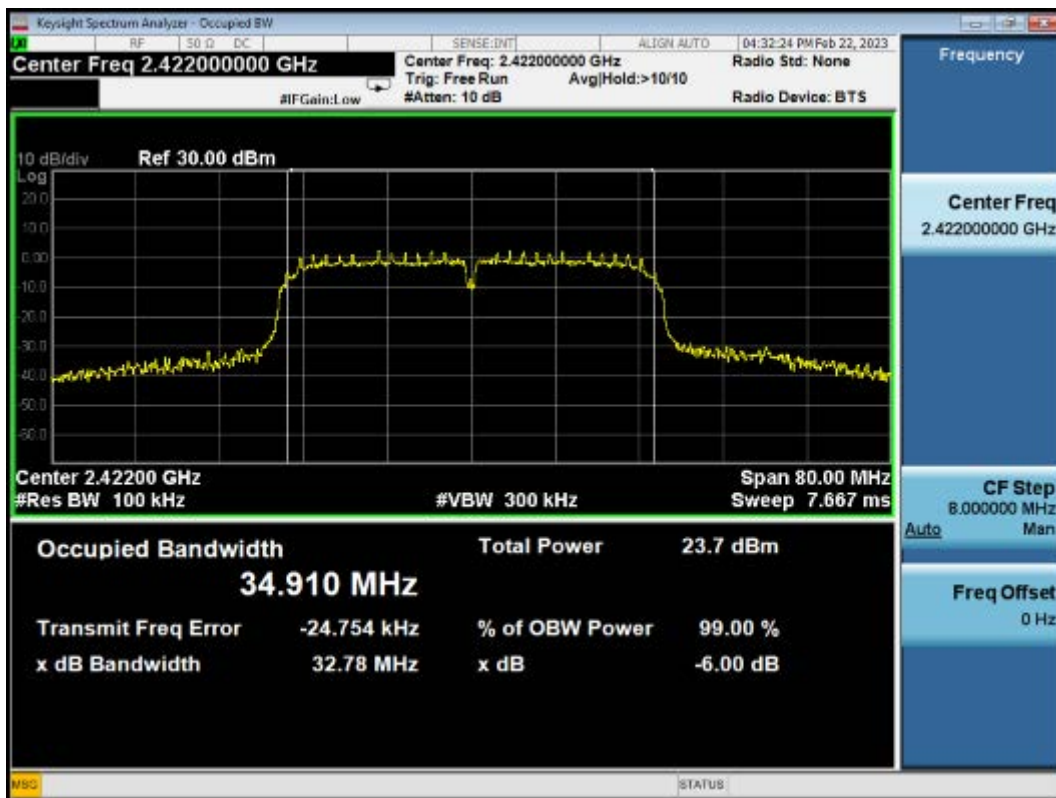

802.11n40 CH2437MHz



802.11n40 CH2452MHz

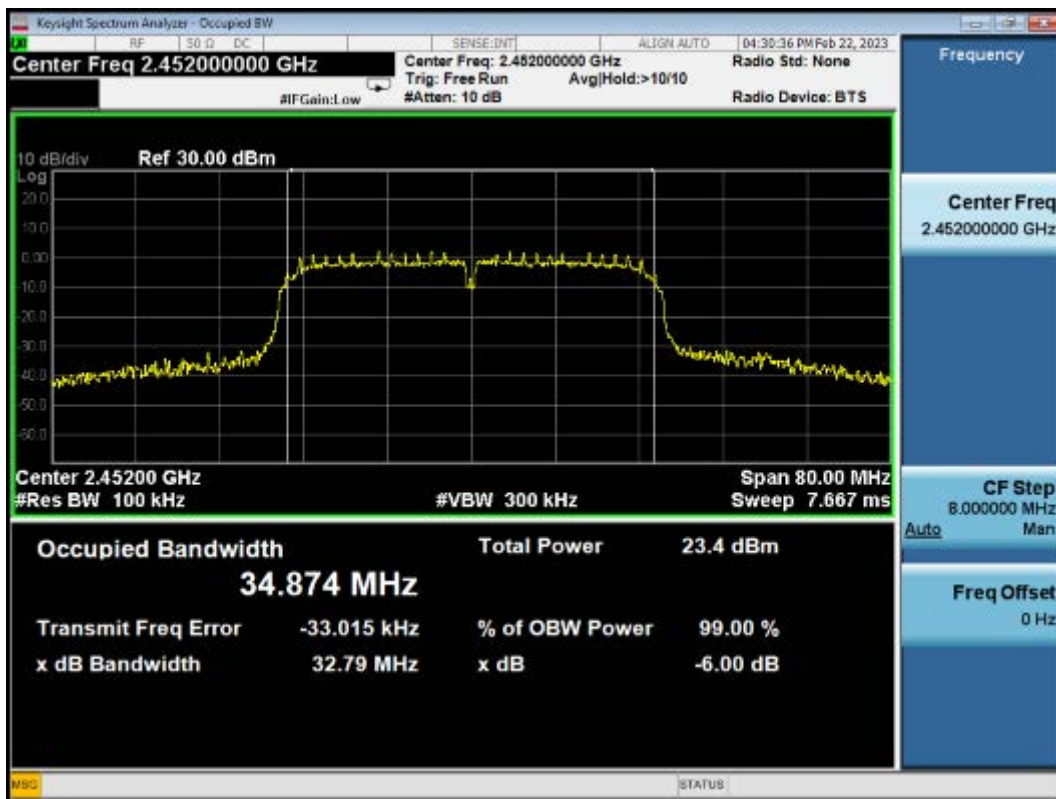

7 MAXIMUM OUTPUT POWER MEASUREMENT

7.1 Test Equipment

The following test equipment was used during the maximum peak output power measurement:

Item	Type	Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Interval
1.	Spectrum Analyzer	Agilent	N9010A	MY52221182	2022.09.15	1 Year
2.	Coaxial Cable	WOKEN	SFL402-105F LEX	F02-150819- 045	2023.02.22	1 Year
3.	20 dB Attenuator	Mini-Circuits	BW-S20W2+	001	2022.08.06	1 Year

7.2 Block Diagram of Test Setup

The Same as Section. 5.2.

7.3 Specification Limits ((§15.247(b)(3))

The Limits of maximum Peak Output Power for digital modulation in 2400-2483.5 MHz is: 1 Watt. (30 dBm)

7.4 Operating Condition of EUT

The software as section 2.3 was used to enable the EUT to change the test mode one by one.

7.5 Test Procedure

The transmitter output was connected to the spectrum analyzer.

Method AVGSA-1 uses trace averaging with the EUT transmitting at full power throughout each sweep.

The procedure for this method is as follows:

- a) Set span to at least 1.5 times the OBW.
- b) Set RBW = 1% to 5% of the OBW, not to exceed 1 MHz.
- c) Set VBW $\geq [3 \times \text{RBW}]$.
- d) Number of points in sweep $\geq [2 \times \text{span} / \text{RBW}]$. (This gives bin-to-bin spacing $\leq \text{RBW} / 2$, so that narrowband signals are not lost between frequency bins.)
- e) Sweep time = auto.
- f) Detector = RMS (i.e., power averaging), if available. Otherwise, use sample detector mode.
- g) If transmit duty cycle $< 98\%$, use a sweep trigger with the level set to enable triggering only on full power pulses. The transmitter shall operate at the maximum power control level for the entire duration of every sweep. If the EUT transmits continuously (i.e., with no OFF intervals) or at duty cycle $\geq 98\%$, and if each transmission is entirely at the maximum power control level, then the trigger shall be set to “free run.”
- h) Trace average at least 100 traces in power averaging (rms) mode.
- i) Compute power by integrating the spectrum across the OBW of the signal using the instrument’s band power measurement function, with band limits set equal to the OBW band edges. If the instrument does not have a band power function, sum the spectrum levels (in power units) at intervals equal to the RBW

extending across the entire OBW of the spectrum.

The test procedure is defined in ANSI C63.10-2013 (11.9.2.2.2 Measurement Procedure “ Method AVGSA-1” was used).

7.6 Test Results


PASSED.

All the test results are listed below.


(Test Date: 2023.02.22 Temperature: 23°C Humidity: 51 %)

Mode	Channel	Frequency (MHz)	Maximum conducted (average) Output Power (dBm)	Limit
802.11b	1	2412	16.64	30 dBm
	6	2437	16.85	30 dBm
	11	2462	17.06	30 dBm
802.11g	1	2412	17.76	30 dBm
	6	2437	17.77	30 dBm
	11	2462	17.92	30 dBm
802.11n20	1	2412	16.51	30 dBm
	6	2437	16.31	30 dBm
	11	2462	16.88	30 dBm
802.11n40	3	2422	15.81	30 dBm
	6	2437	15.7	30 dBm
	9	2452	15.91	30 dBm


802.11b CH2412MHz

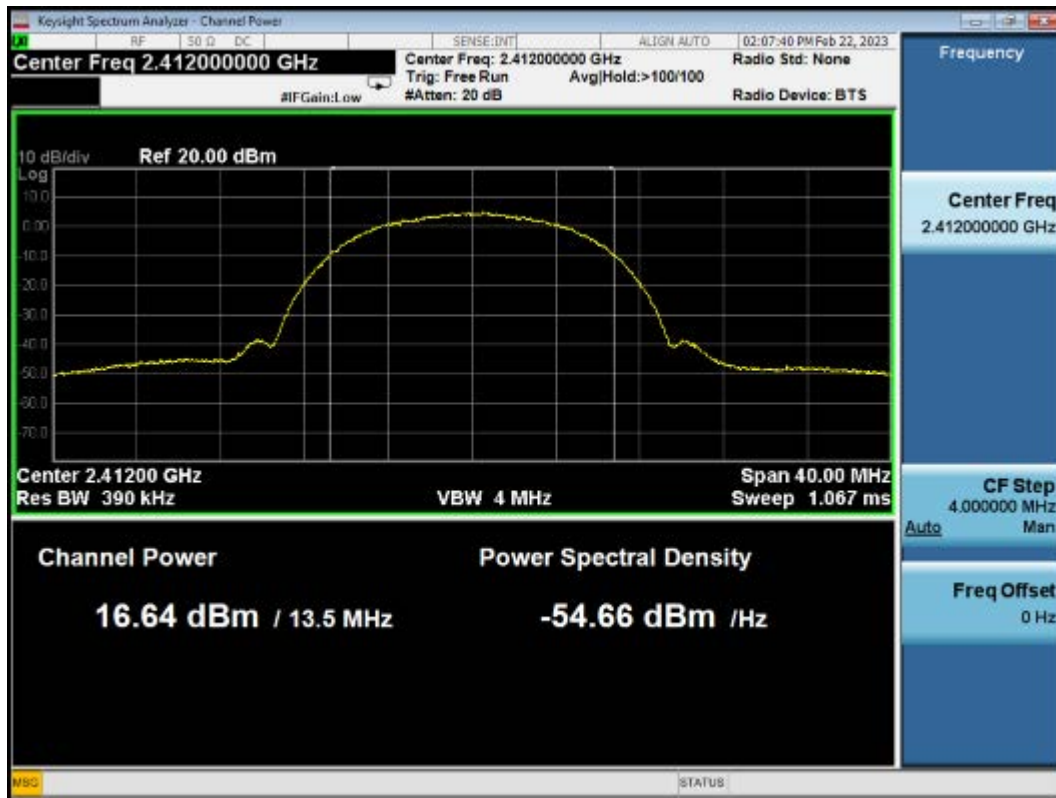


802.11b CH2437MHz

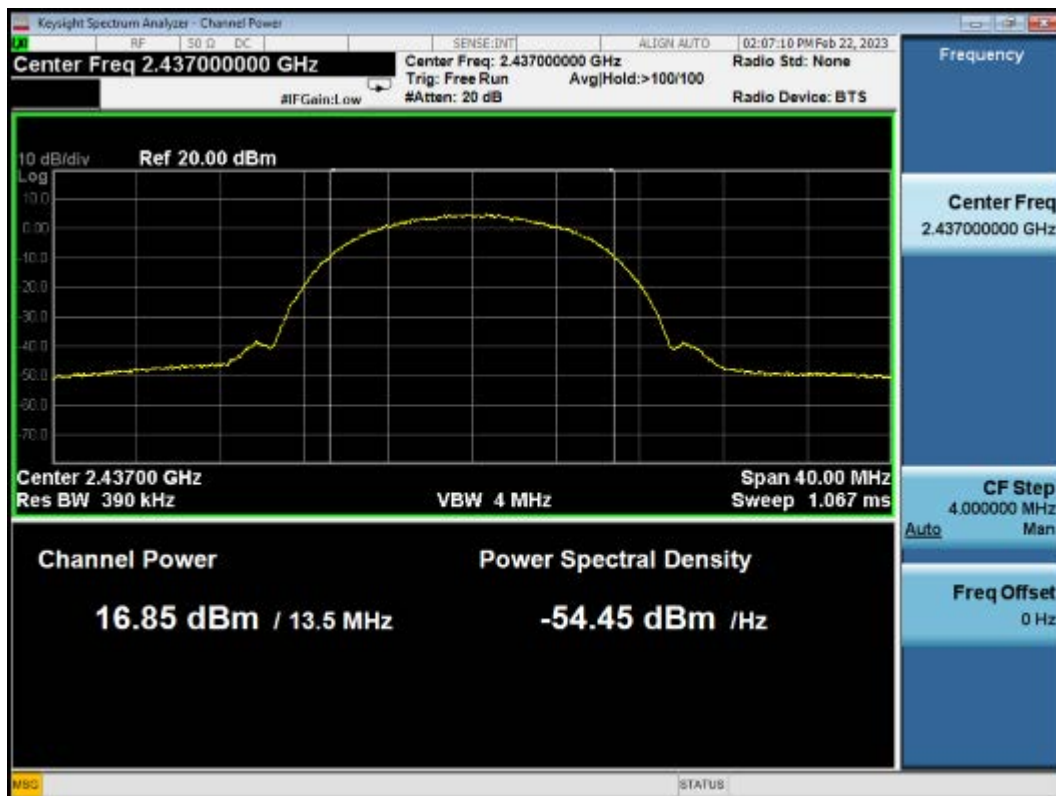


802.11b CH2462MHz

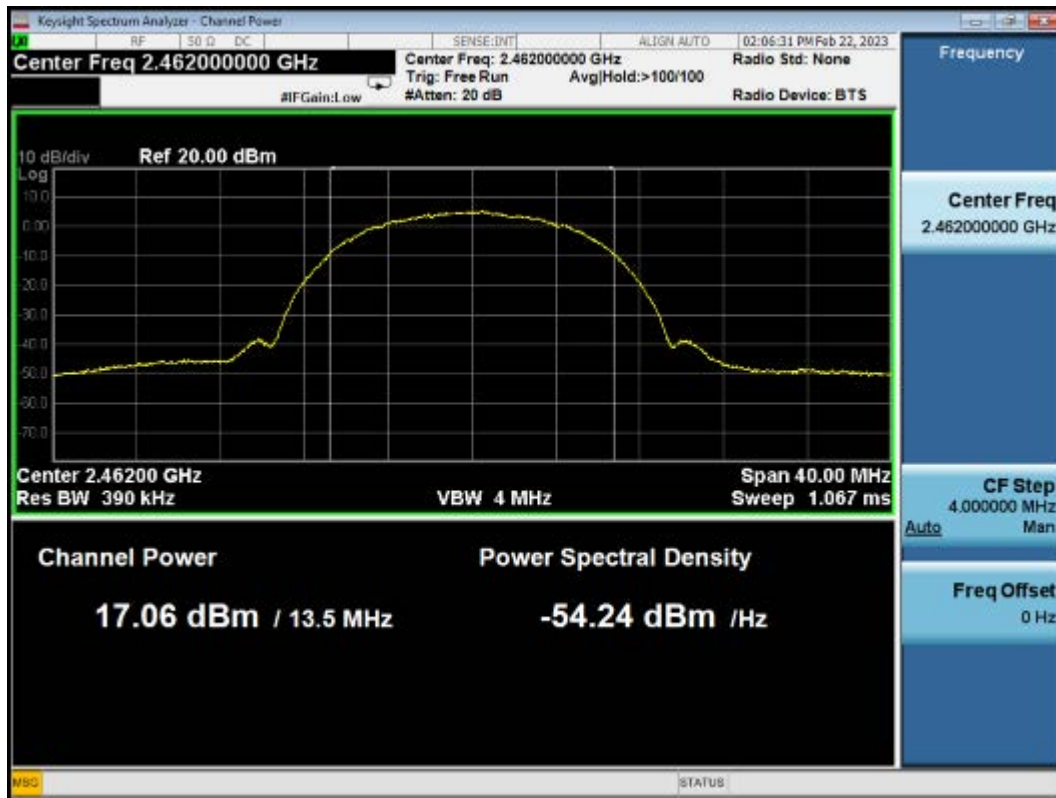


802.11g CH2412MHz

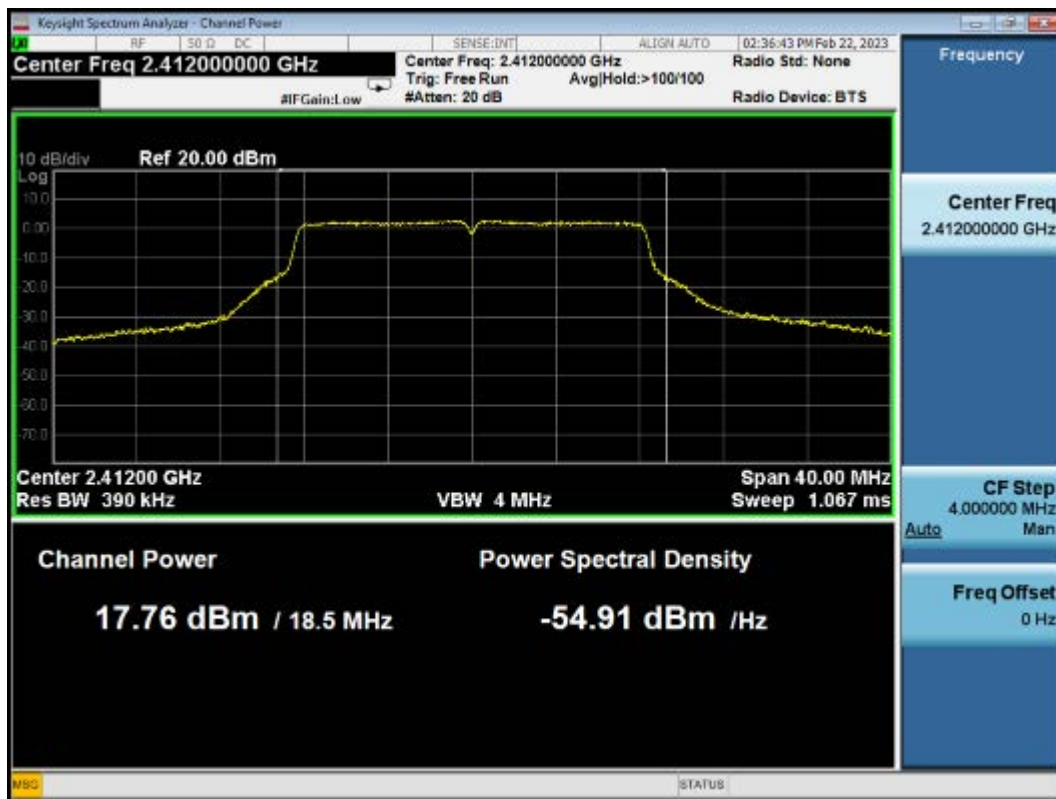


802.11g CH2437MHz

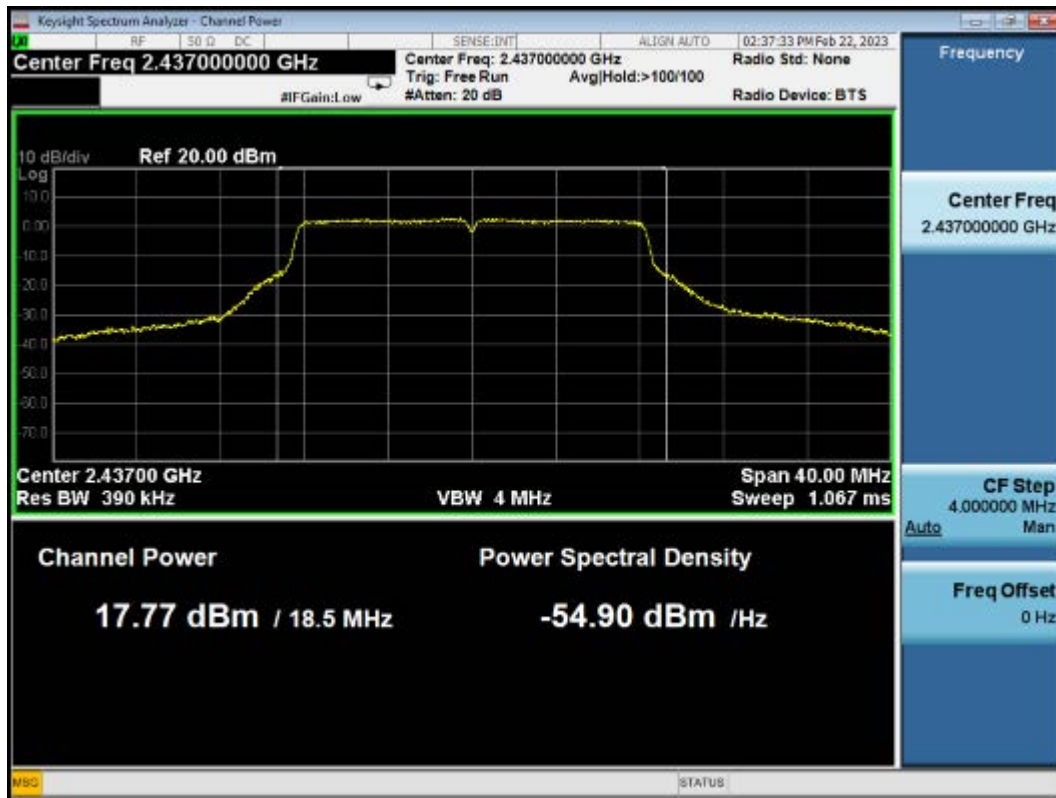


802.11g CH2462MHz

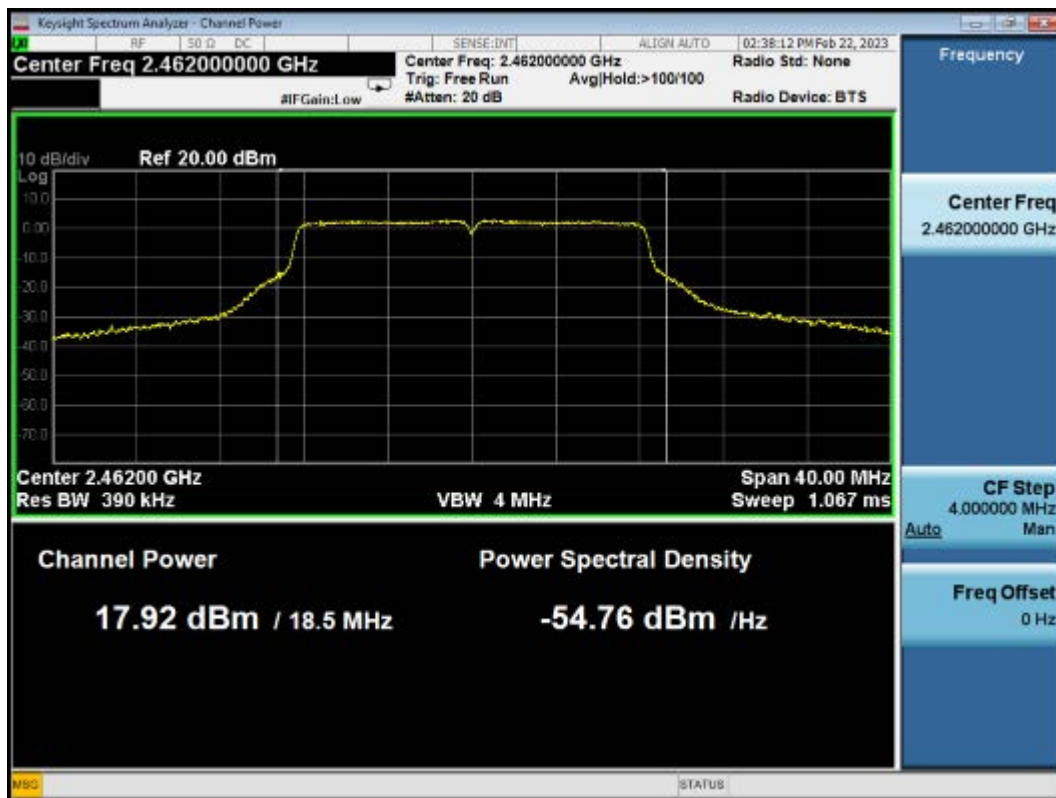


802.11n20 CH2412MHz

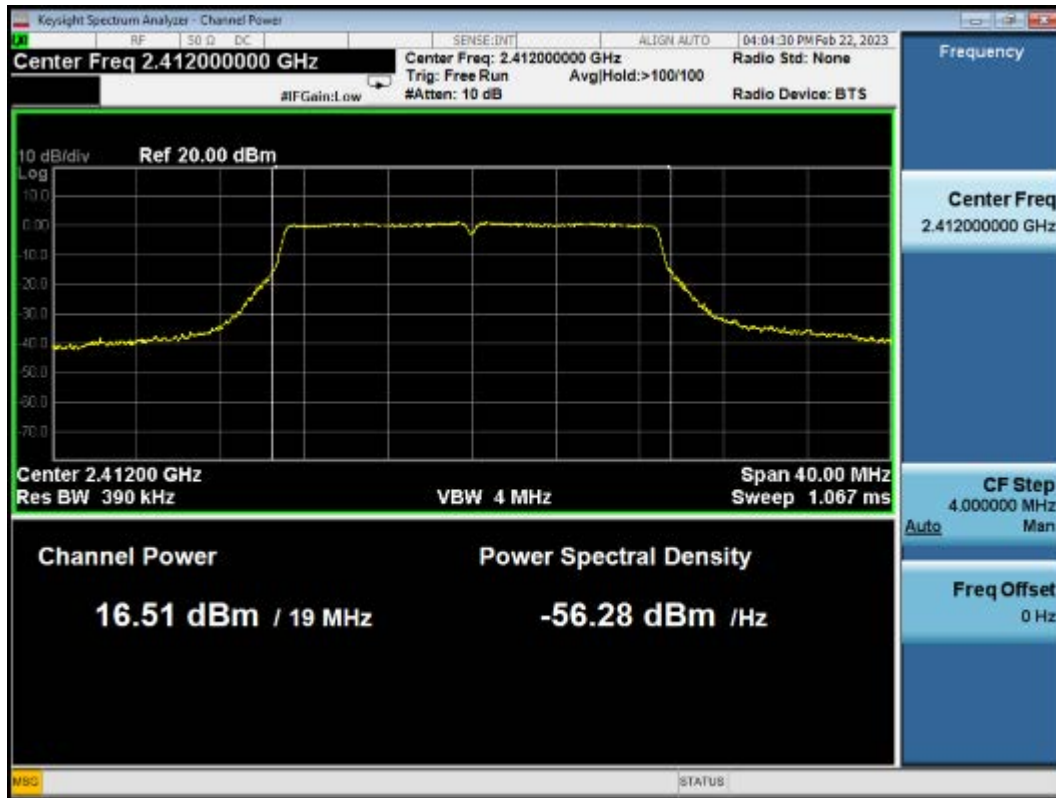


802.11n20 CH2437MHz

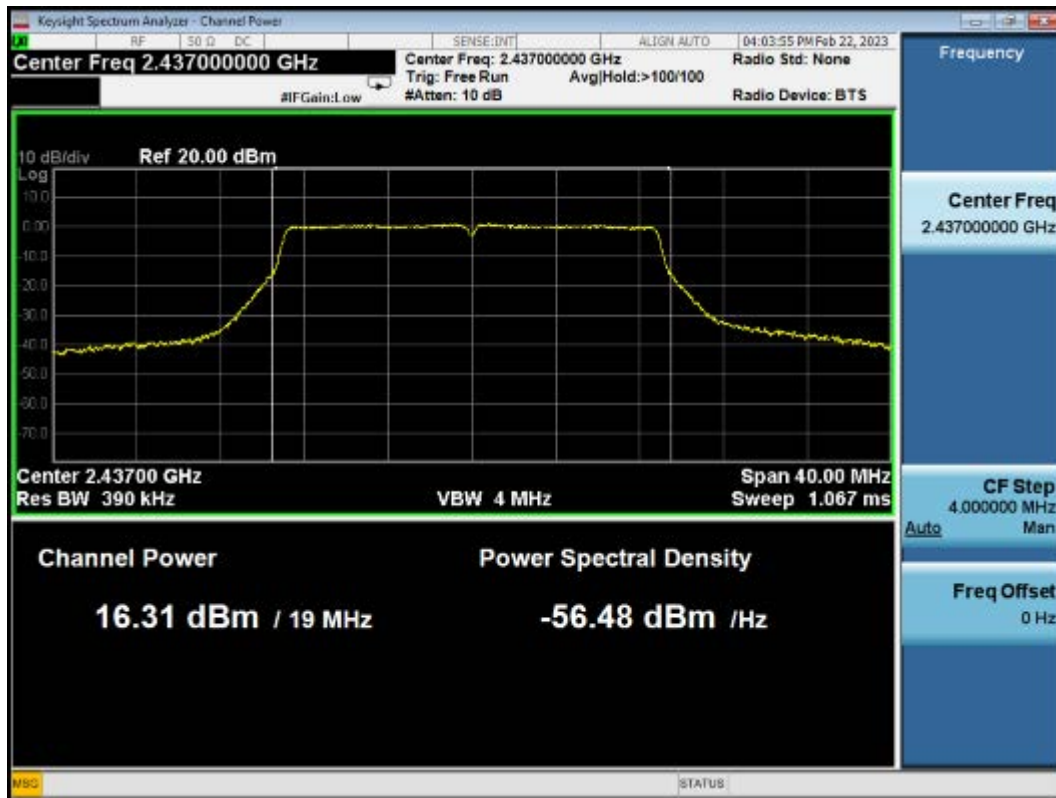


802.11n20 CH2462MHz

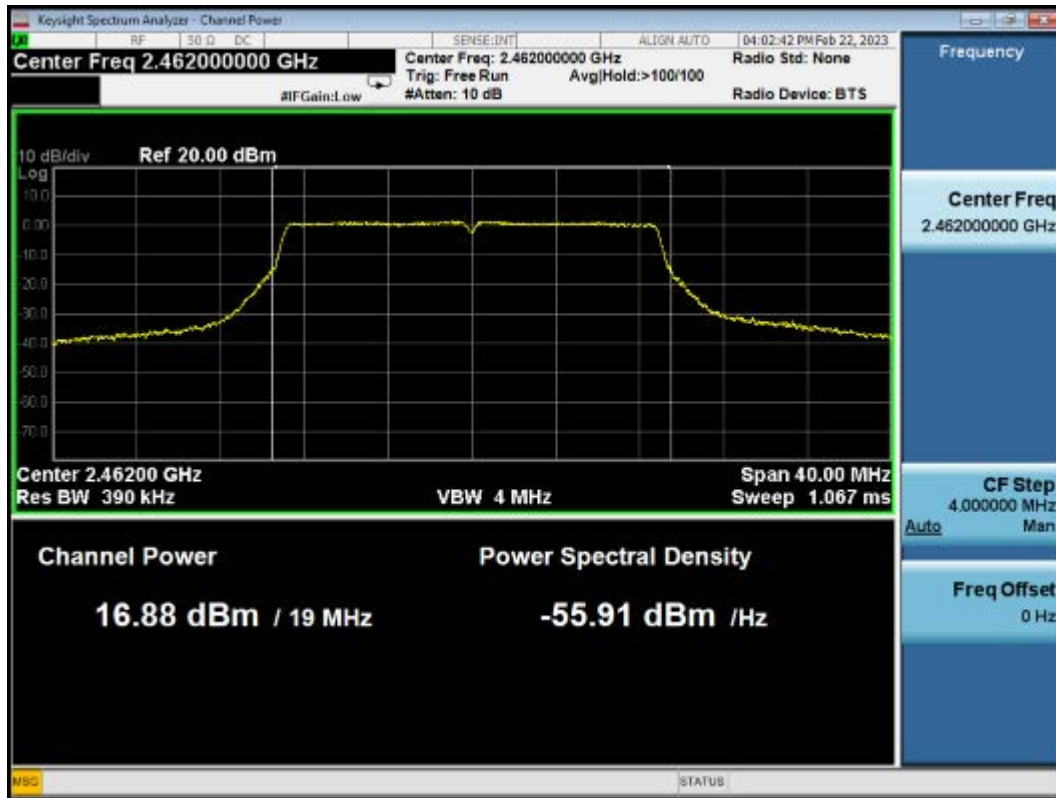


802.11n40 CH2422MHz

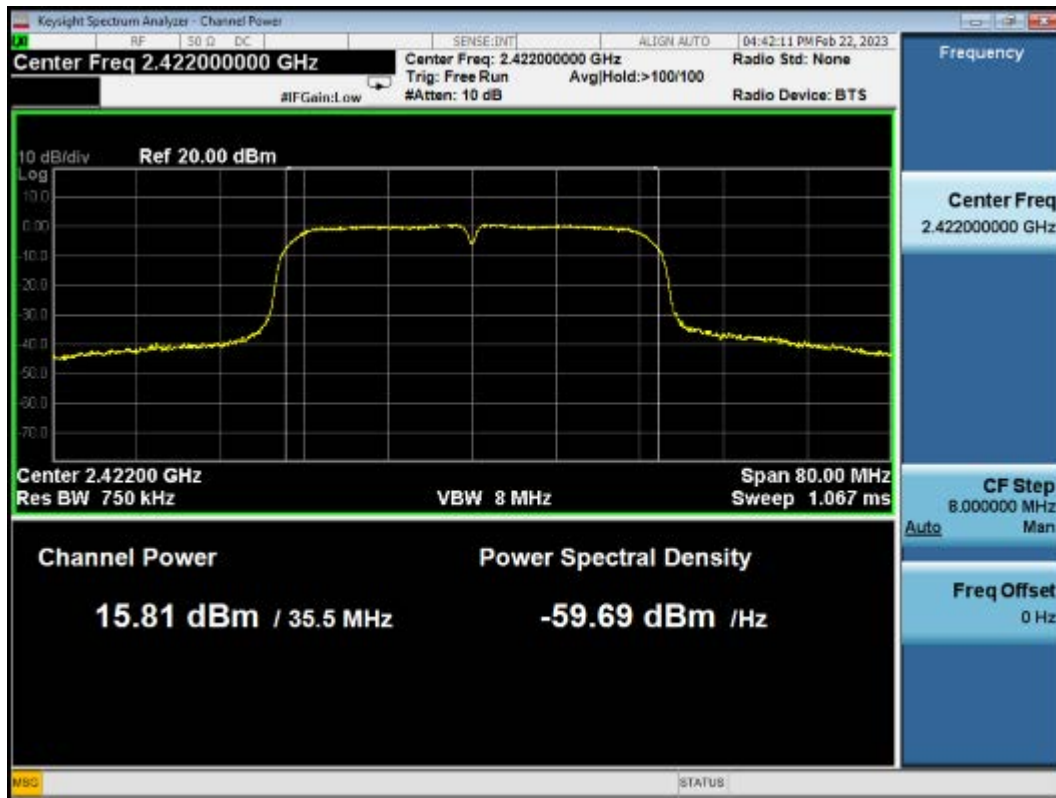

802.11n40 CH2437MHz

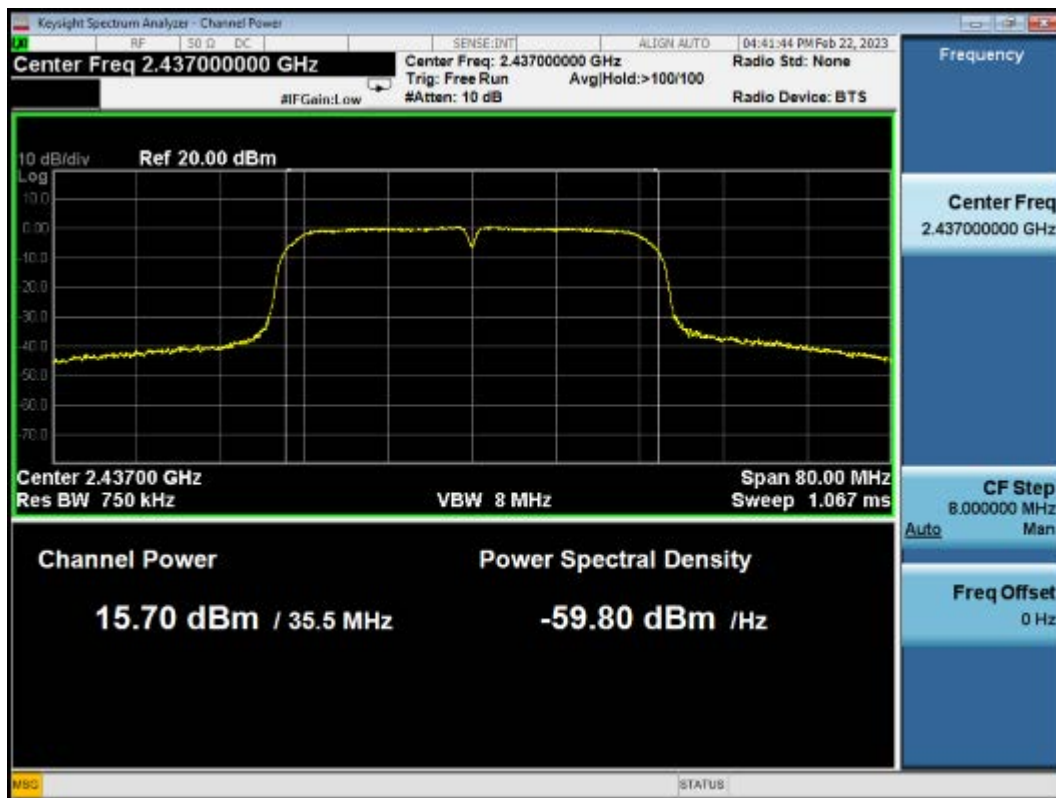

802.11n40 CH2452MHz

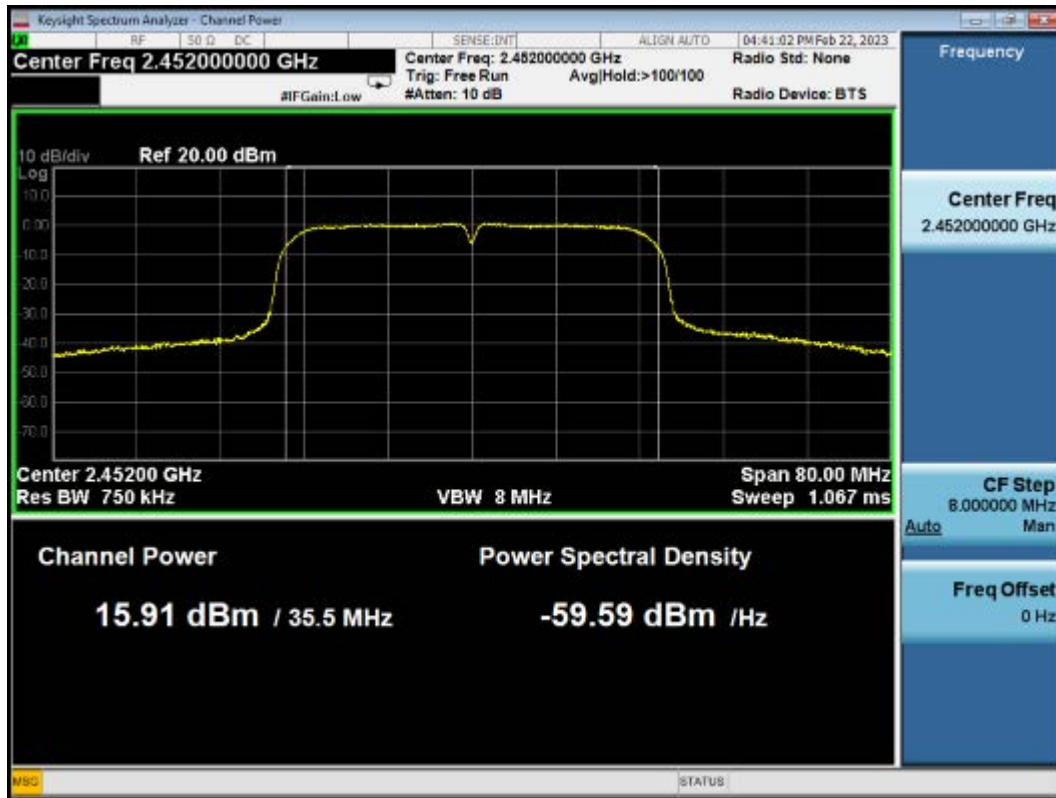

8 EMISSION LIMITATIONS MEASUREMENT

8.1 Test Equipment

The following test equipment was used during the emission limitations test:

Item	Type	Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Interval
1.	Spectrum Analyzer	Agilent	N9010A	MY52221182	2021.09.15	1 Year
2.	Coaxial Cable	WOKEN	SFL402-105F LEX	F02-150819-045	2021.03.08	1 Year
3.	20 dB Attenuator	Mini-Circuits	BW-S20W2+	001	2022.08.06	1 Year

8.2 Block Diagram of Test Setup

The Same as Section. 5.2.

8.3 Specification Limits (§15.247(d))

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required.

In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)). (※This test result attaching to Section. 3.7)

8.4 Operating Condition of EUT

The software as section 2.3 was used to enable the EUT to change the test mode one by one.

8.5 Test Procedure

The transmitter output was connected to the spectrum analyzer.

Establish a reference level by using the following procedure:

- Set instrument center frequency to DTS channel center frequency.
- Set the span to ≥ 1.5 times the DTS bandwidth.
- Set the RBW = 100 kHz.
- Set the VBW $\geq [3 \times \text{RBW}]$.
- Detector = peak.
- Sweep time = auto couple.
- Trace mode = max hold.
- Allow trace to fully stabilize.
- Use the peak marker function to determine the maximum PSD level.

Note that the channel found to contain the maximum PSD level can be used to establish the reference level.

Establish an emission level by using the following procedure:

- a) Set the center frequency and span to encompass frequency range to be measured.
- b) Set the RBW = 100 kHz.
- c) Set the VBW $\geq [3 \times \text{RBW}]$.
- d) Detector = peak.
- e) Sweep time = auto couple.
- f) Trace mode = max hold.
- g) Allow trace to fully stabilize.
- h) Use the peak marker function to determine the maximum amplitude level.

Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) is attenuated by at least the minimum requirements specified in 11.11. Report the three highest emissions relative to the limit.

Scan up through 10th harmonic.

The test procedure is defined in ANSI C63.10-2013 (11.11.2 Reference level measurement and 11.11.3 Emission level measurement was used).

8.6 Test Results

PASSED.

The test data was attached in the next pages.

(Test Date: 2023.02.22 Temperature: 23°C Humidity: 51 %)


Mode	Channel	Frequency (MHz)	Data Page
802.11b	1	2412	P75-76
	6	2437	P77-78
	11	2462	P79-80
802.11g	1	2412	P81-82
	6	2437	P83-84
	11	2462	P85-86
802.11n20	1	2412	P87-88
	6	2437	P89-90
	11	2462	P91-92
802.11n40	3	2422	P93-94
	6	2437	P95-96
	9	2452	P97-98


802.11b CH2412MHz

Reference level



Emission level

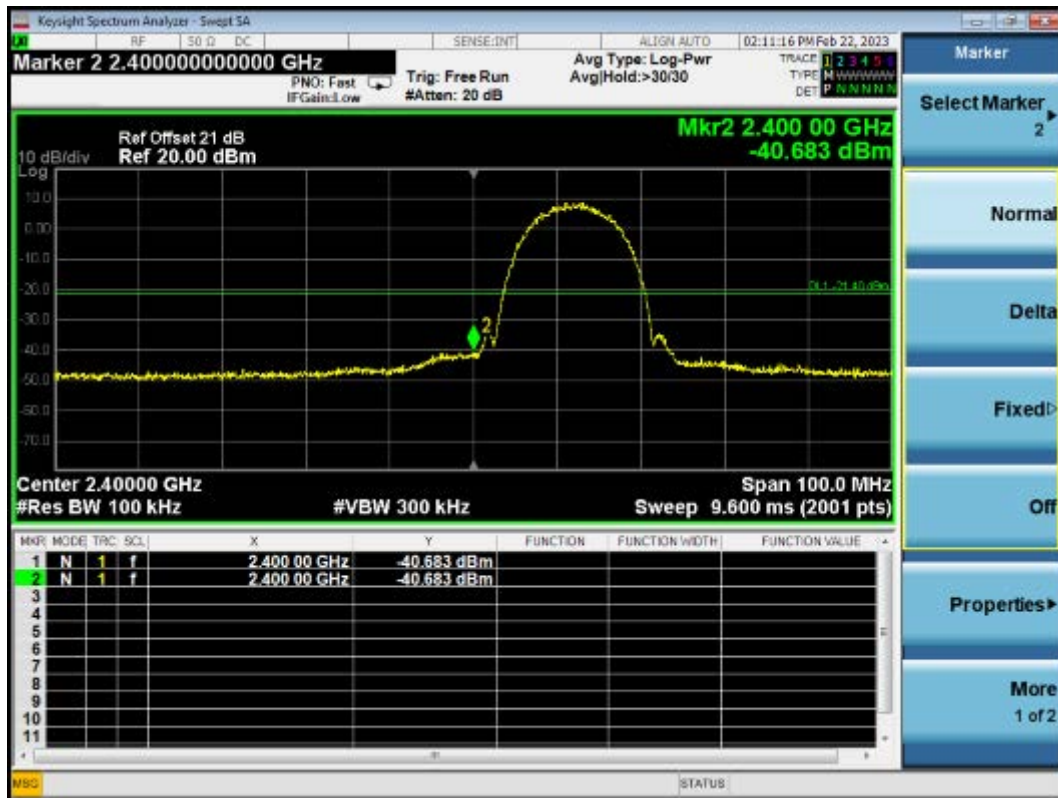

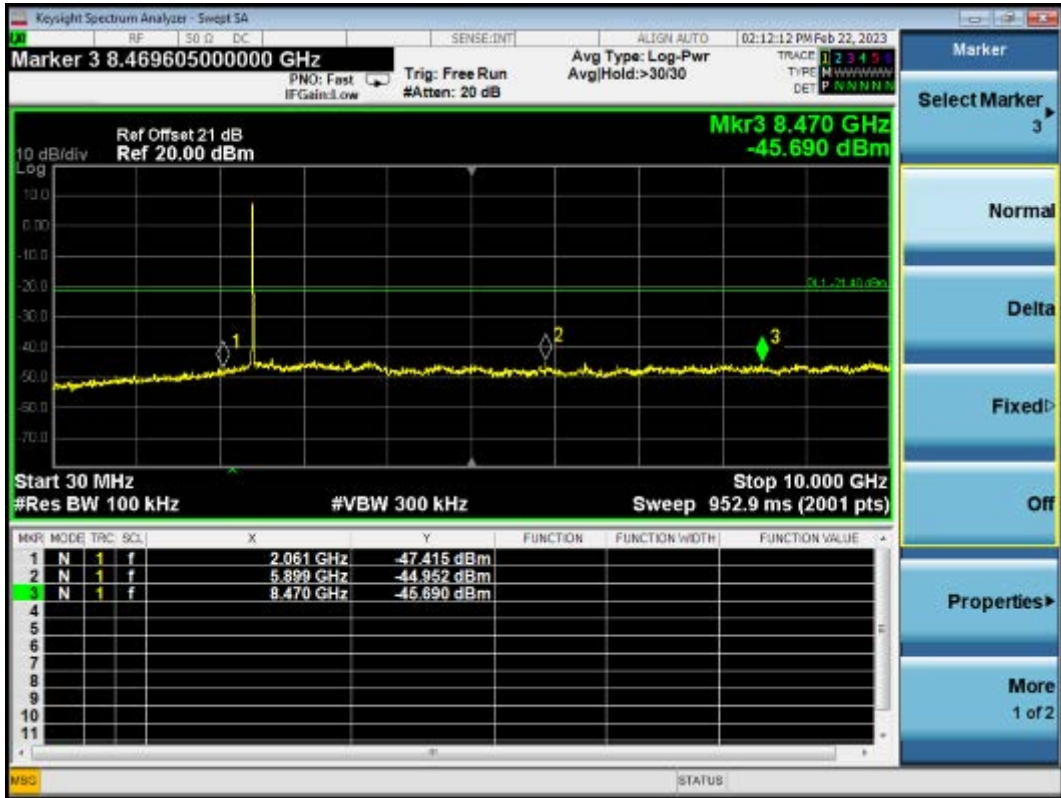



802.11b CH2437MHz

Reference level



Emission level

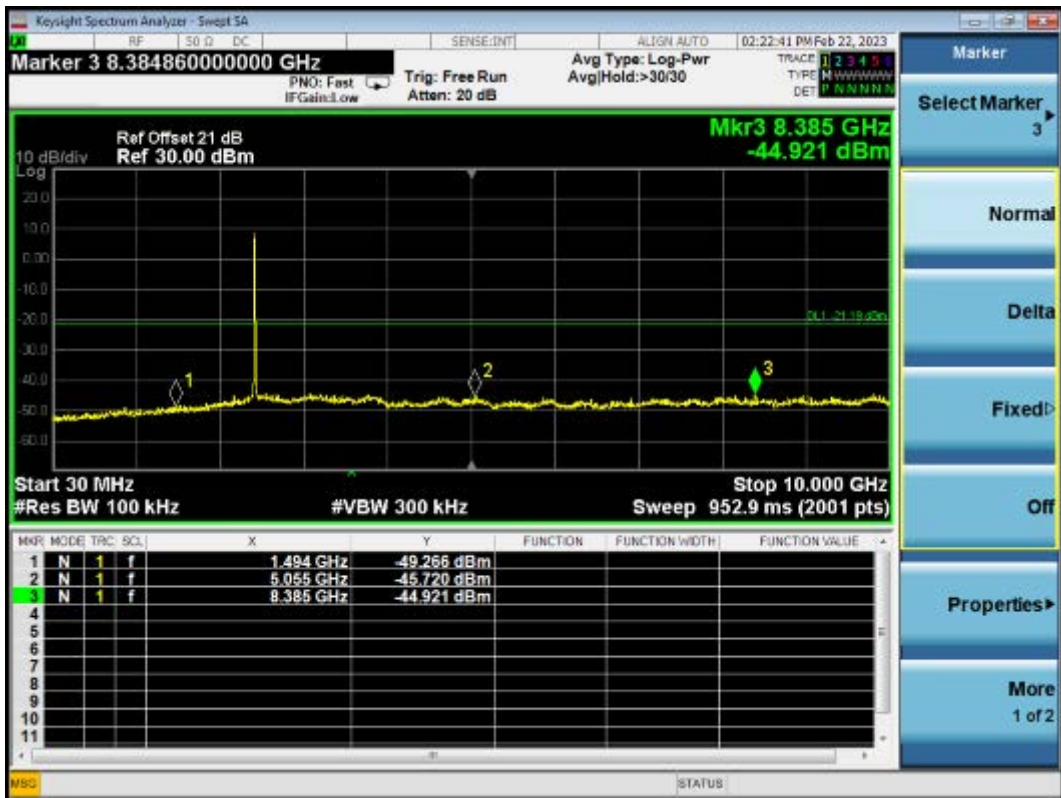

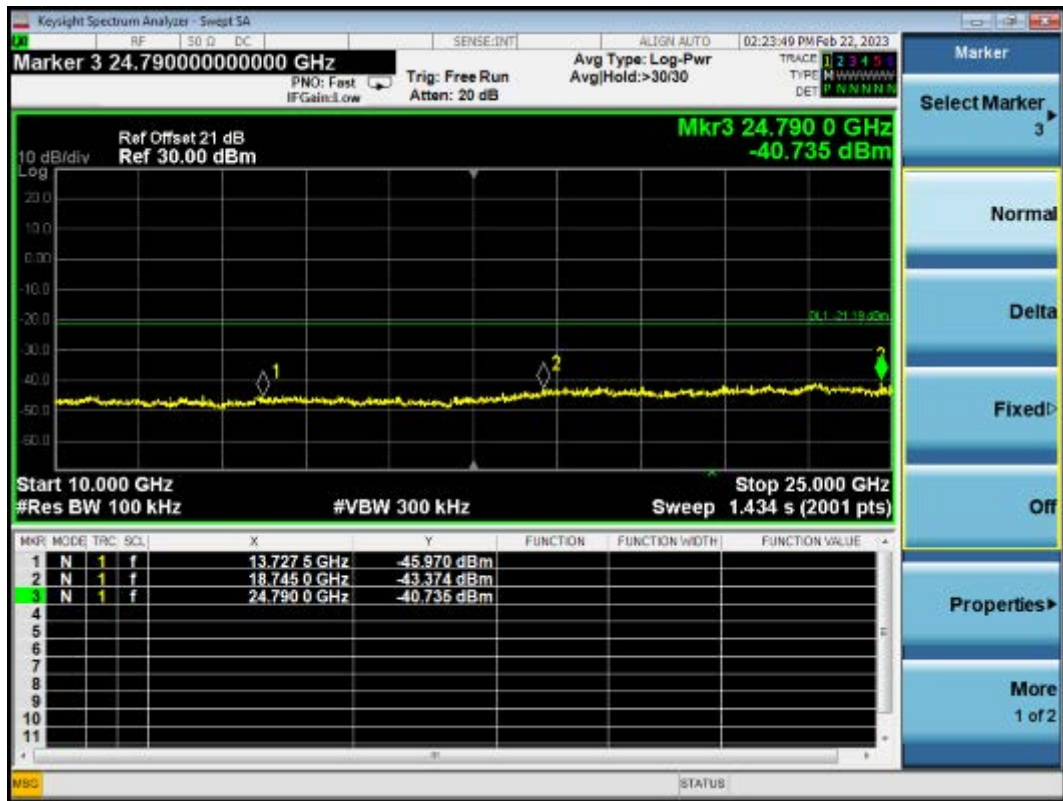




802.11b CH2462MHz

Reference level




Emission level

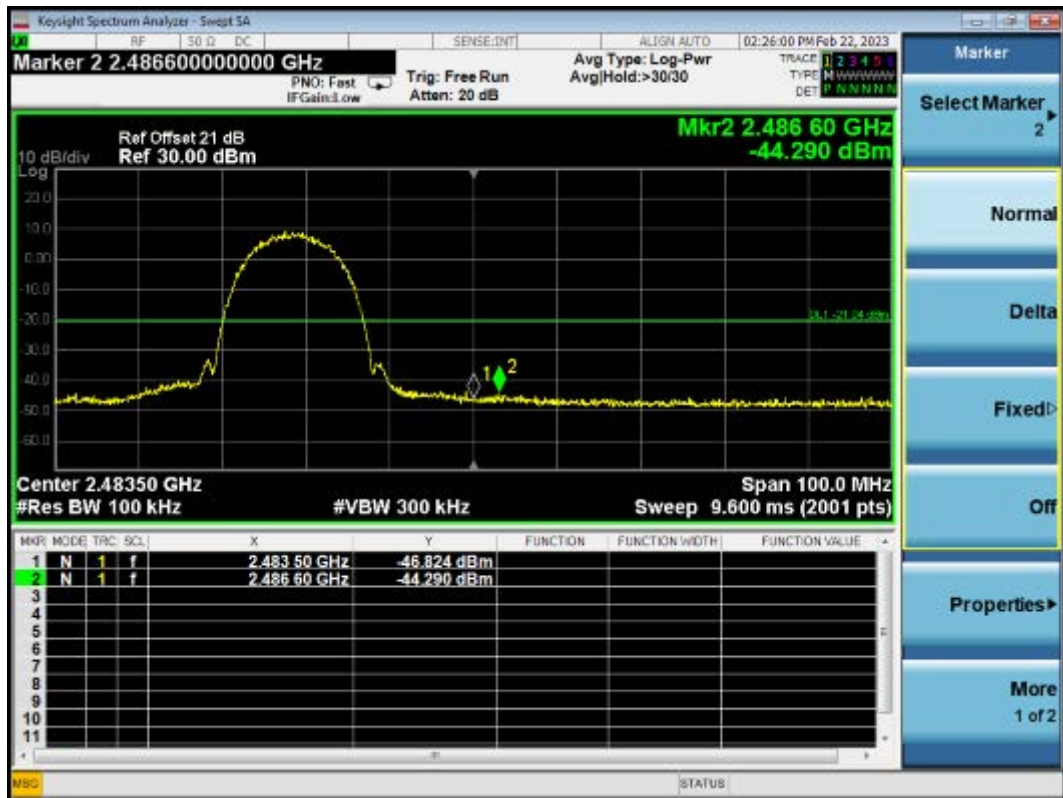

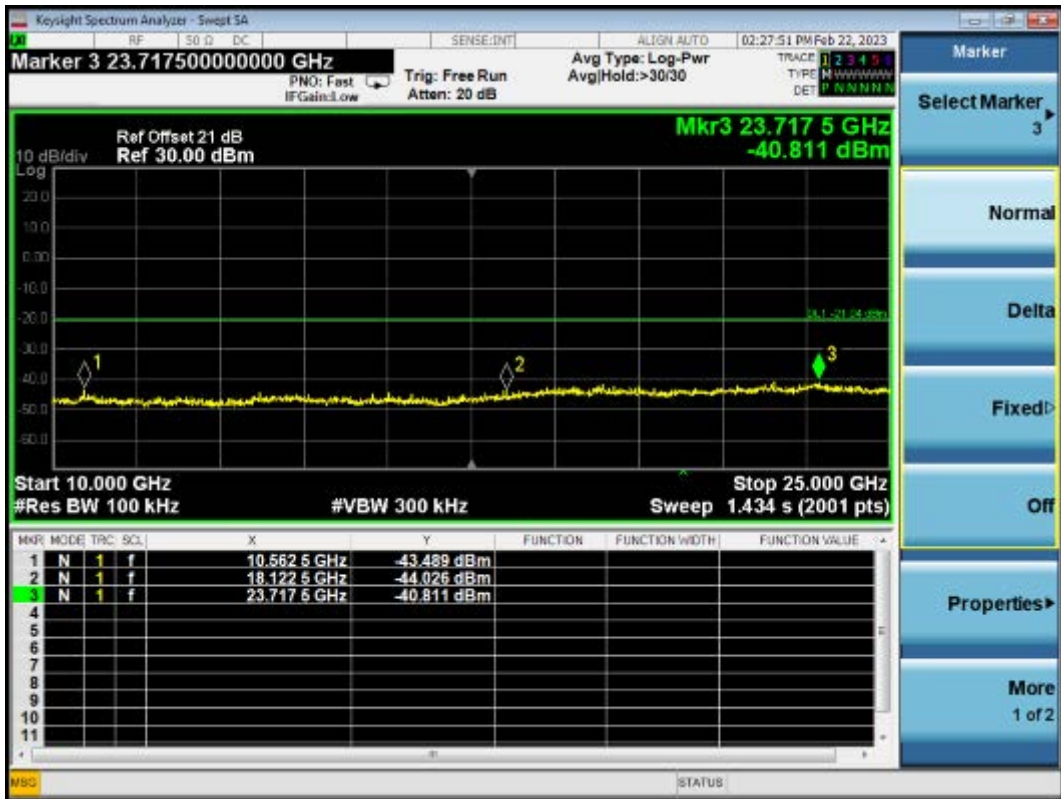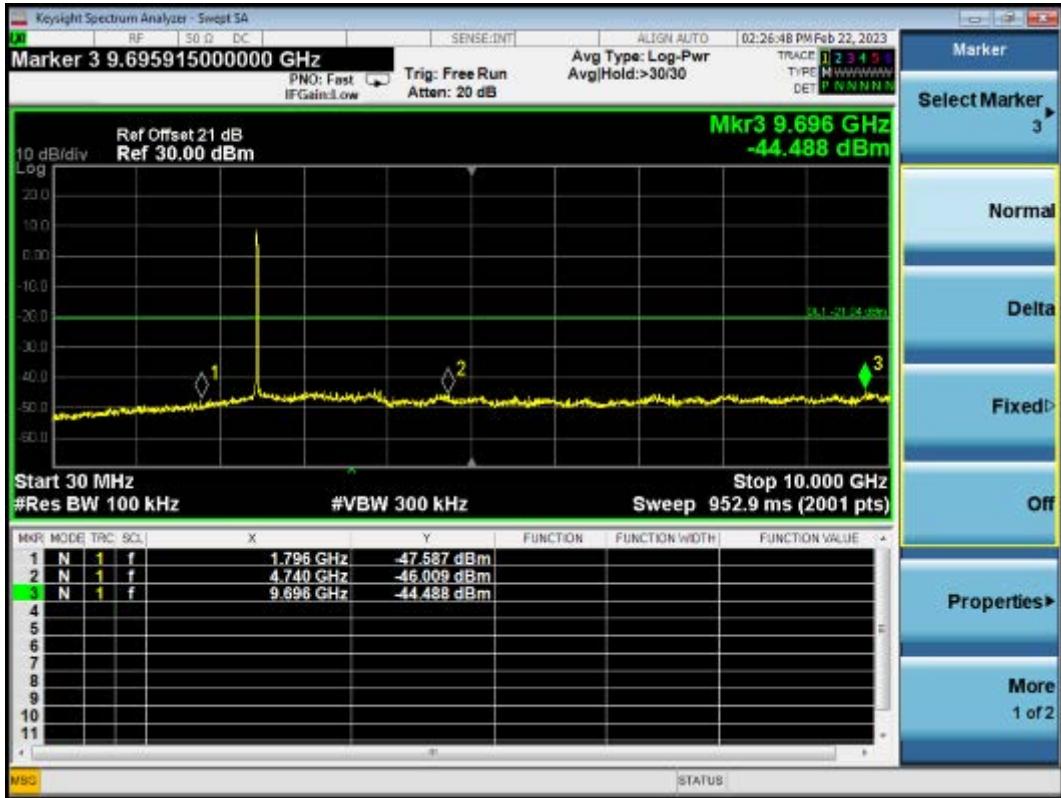



802.11g CH2412MHz

Reference level

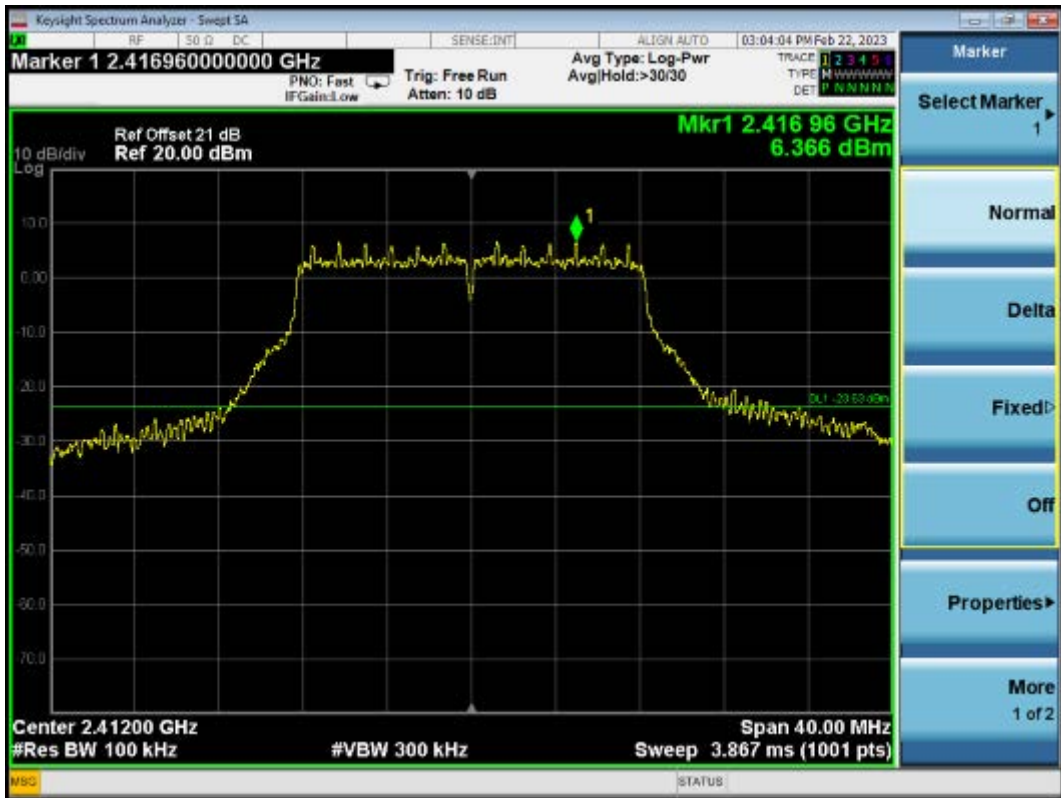

Emission level



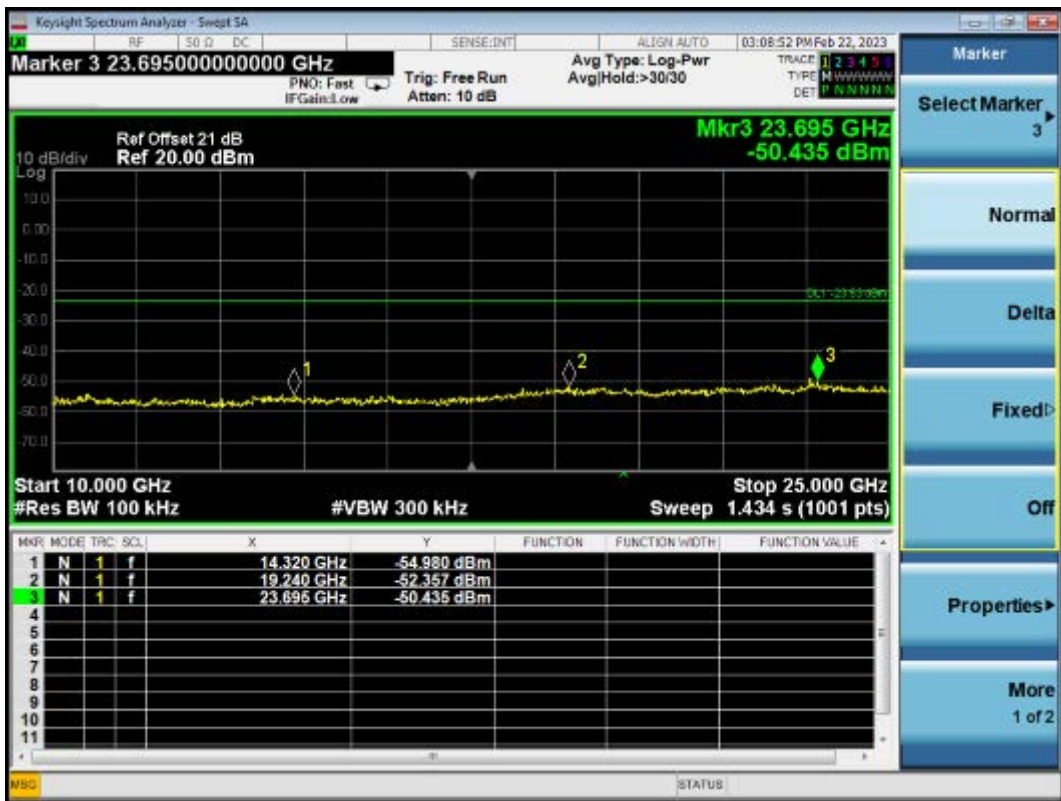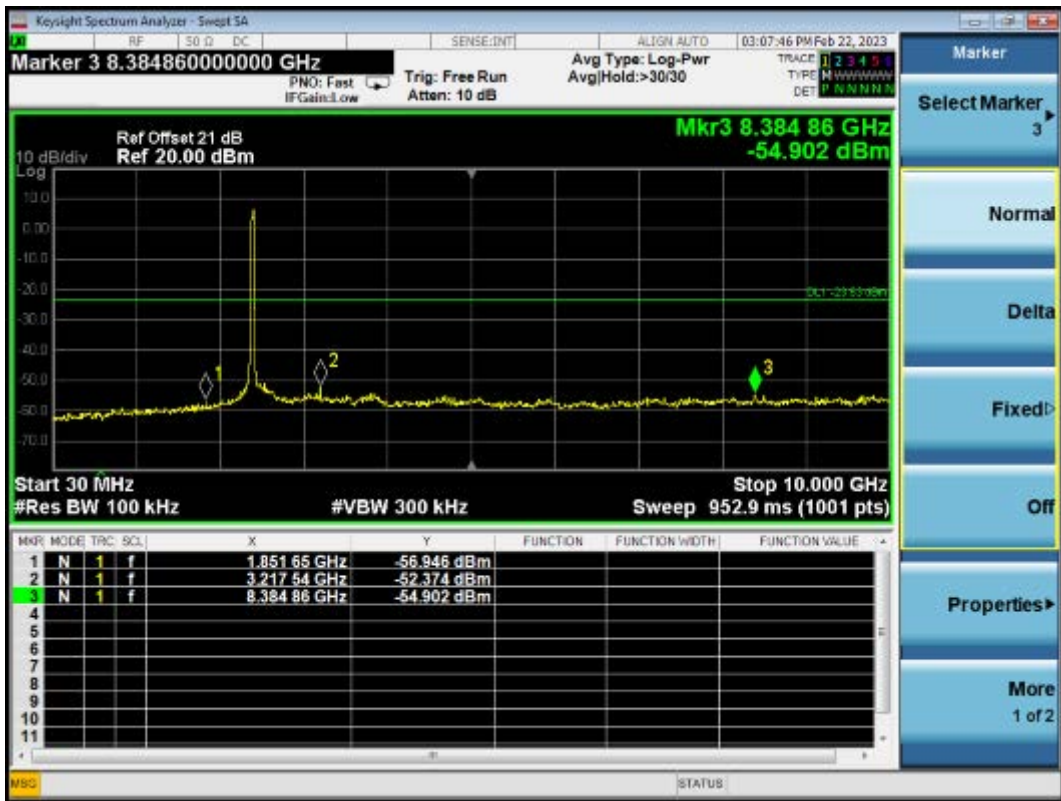



802.11g CH2437MHz

Reference level




Emission level

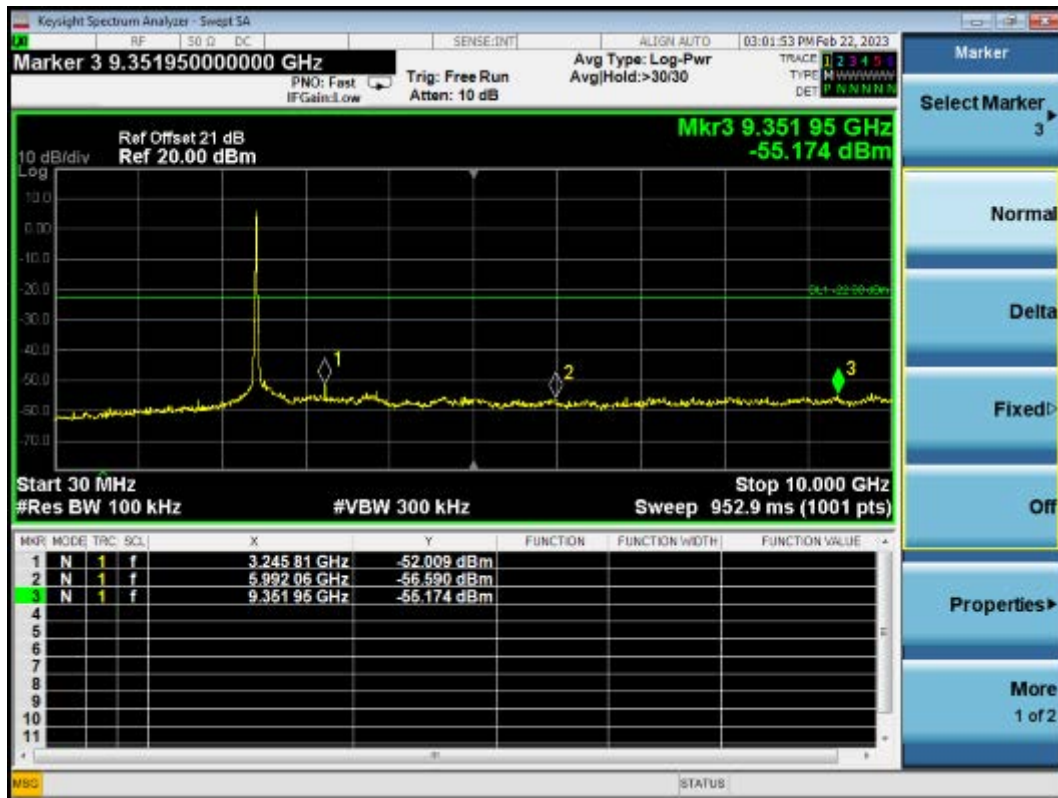

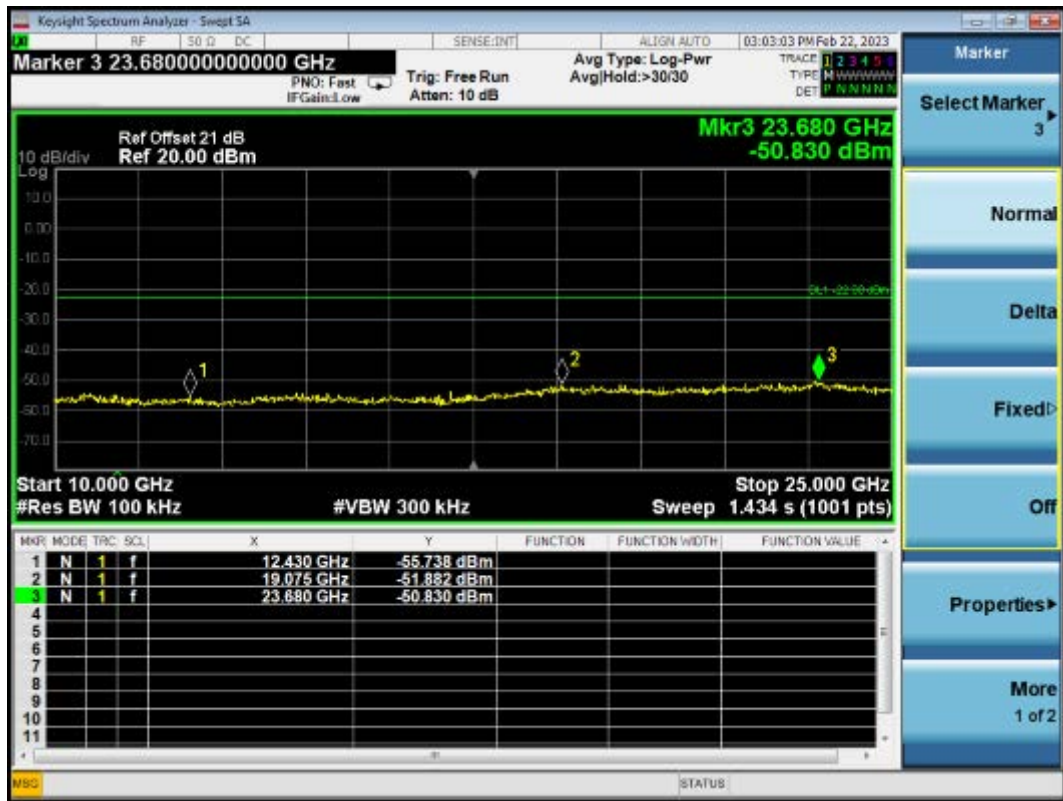




802.11g CH2462MHz

Reference level

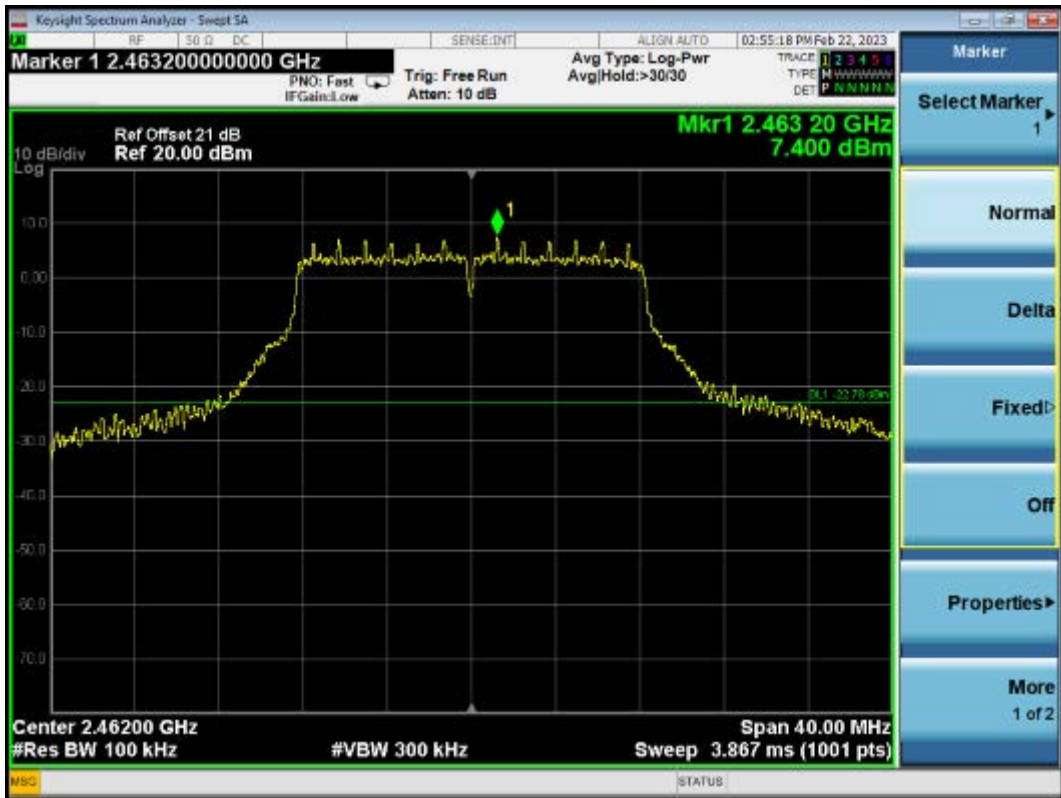


Emission level

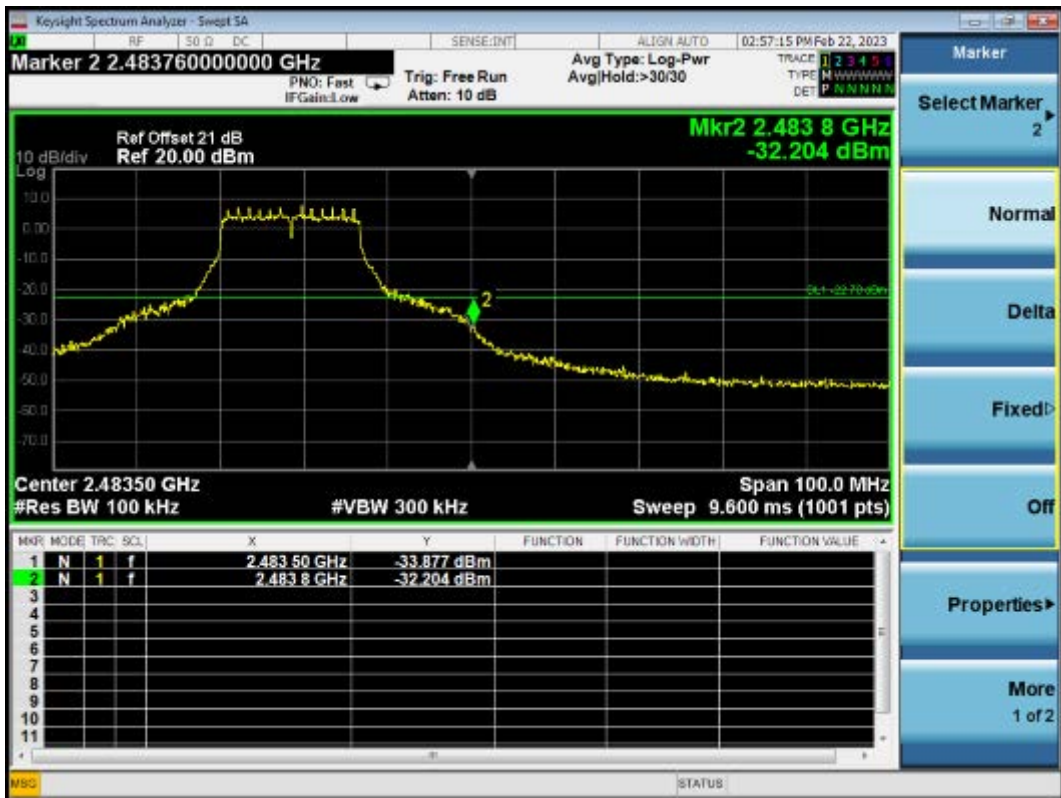

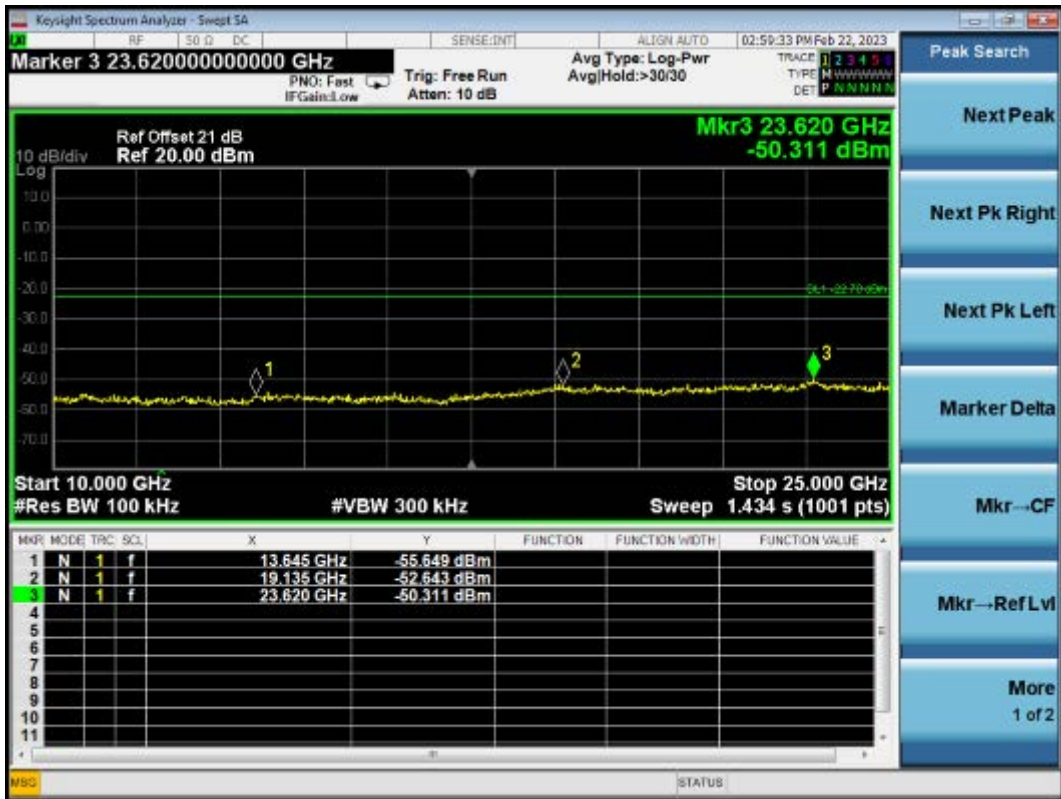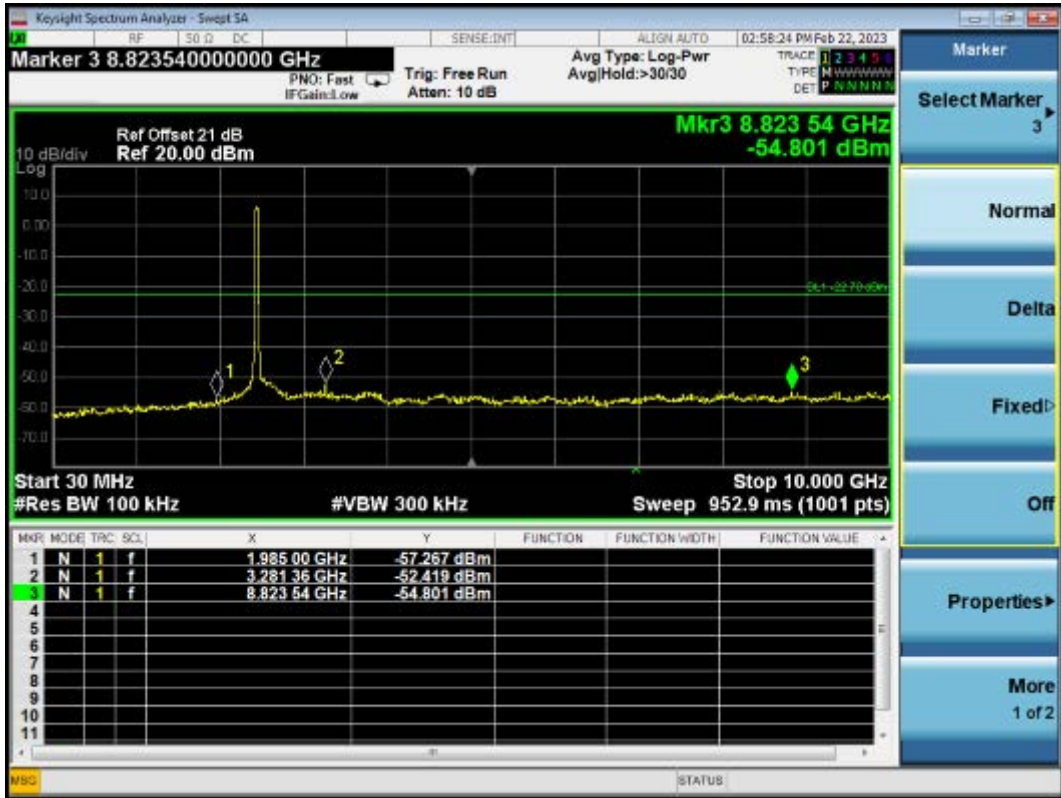




802.11n20 CH2412MHz

Reference level

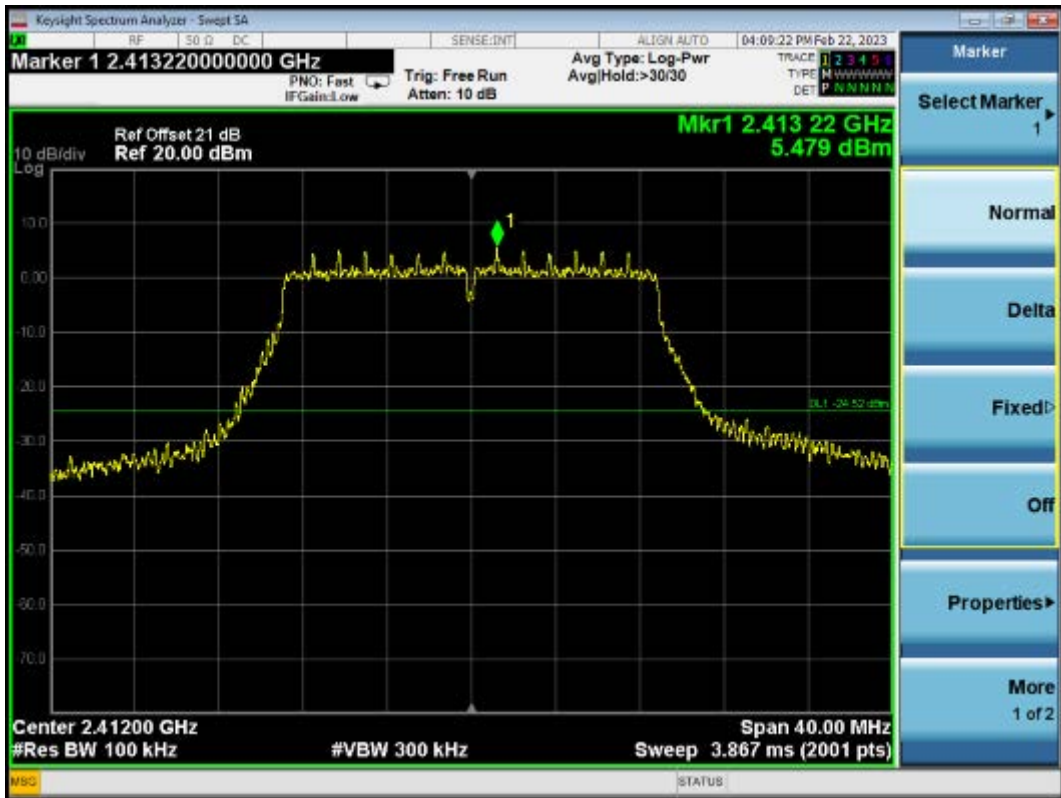

Emission level

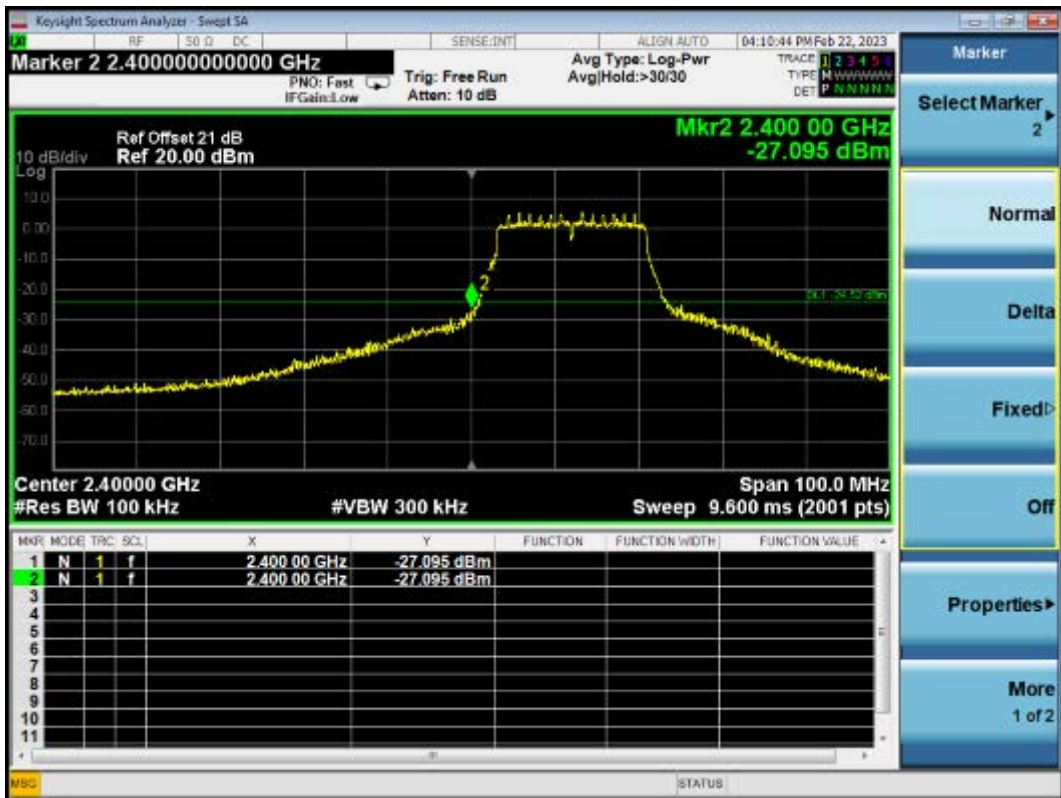

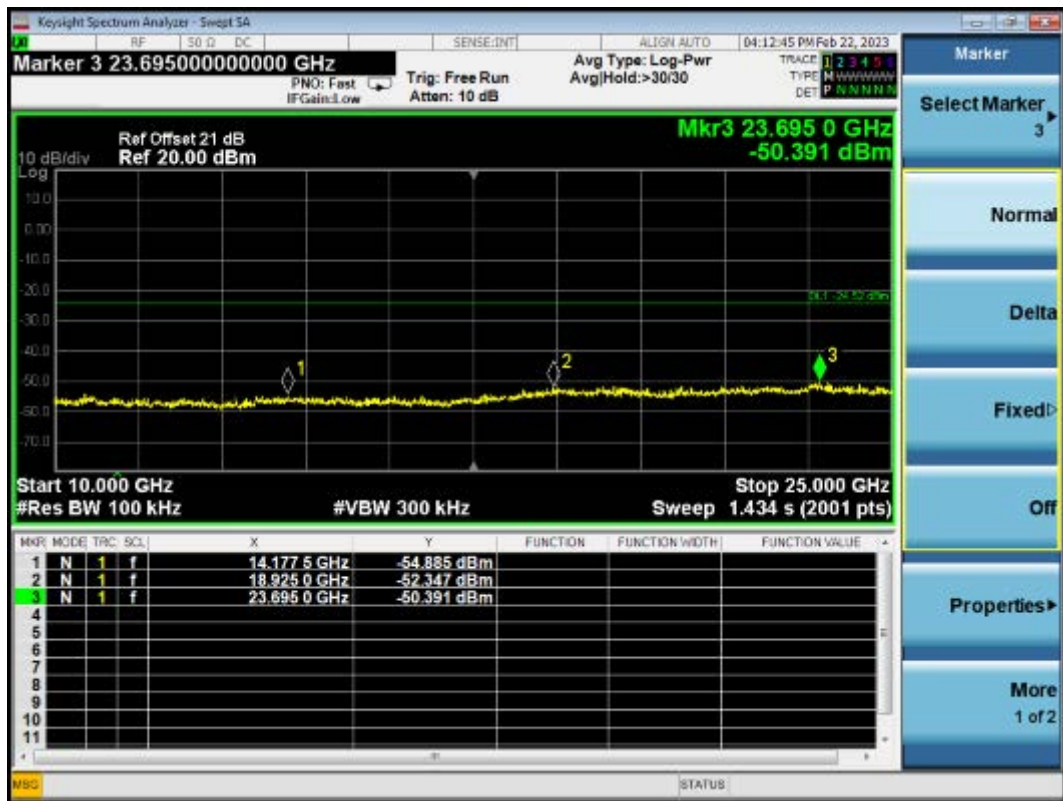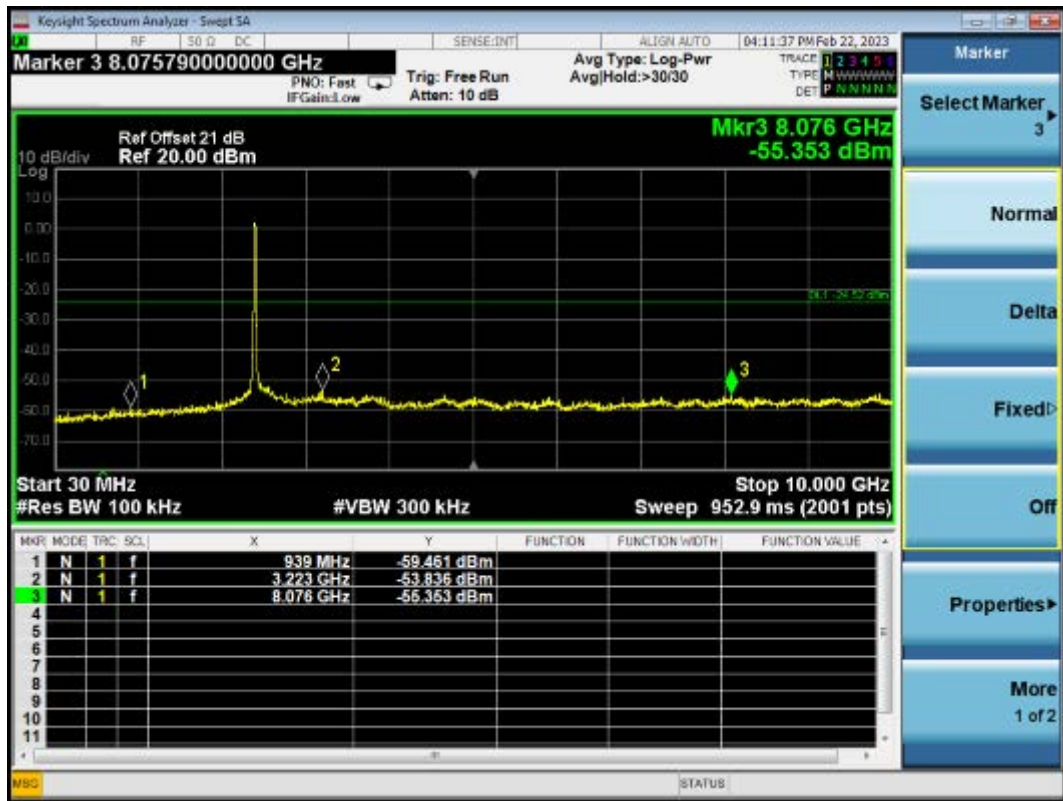



802.11n20 CH2437MHz

Reference level




Emission level

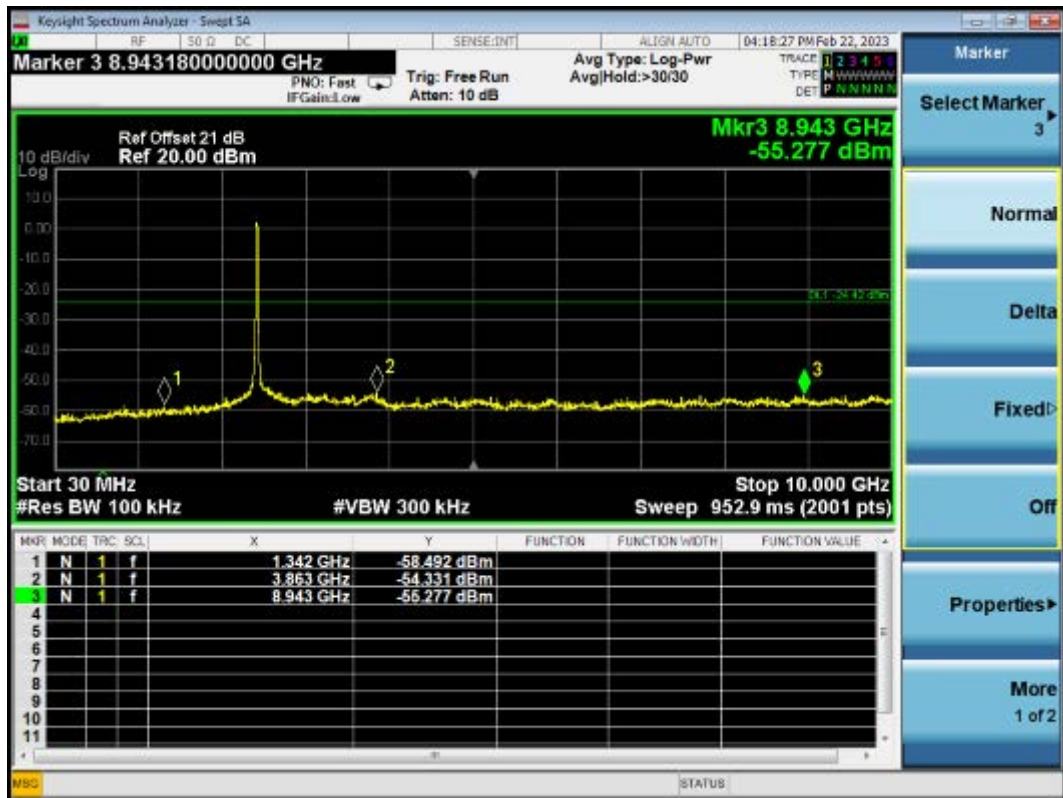

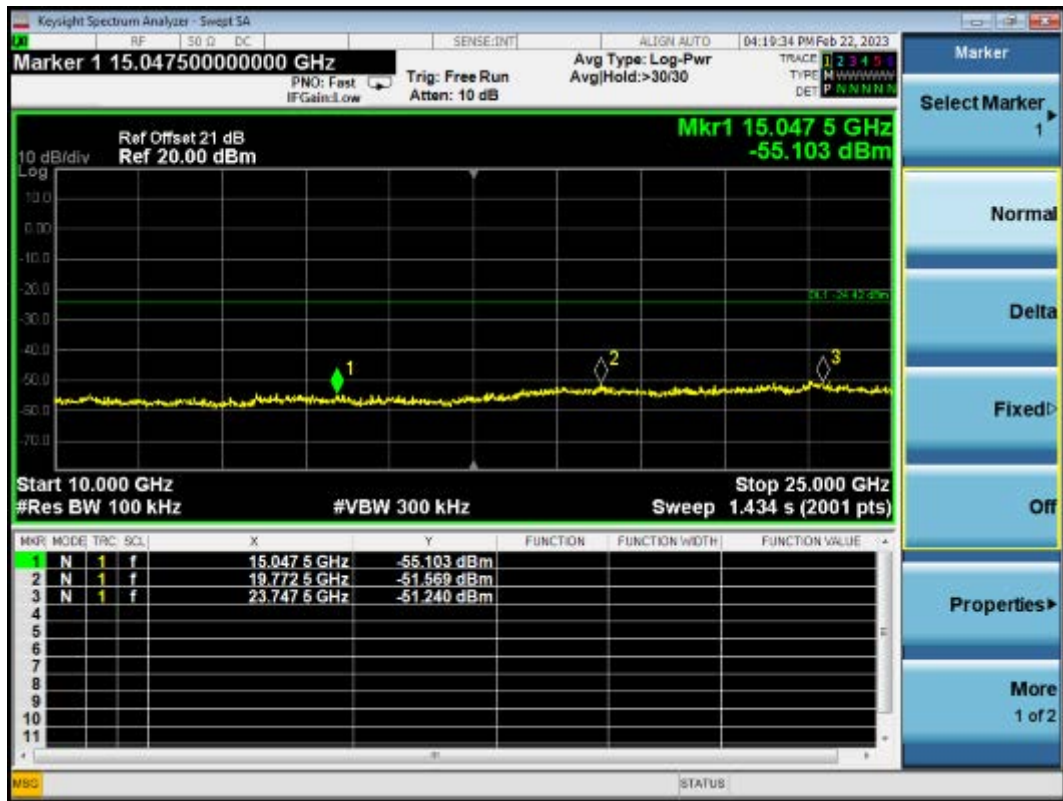




802.11n20 CH2462MHz

Reference level

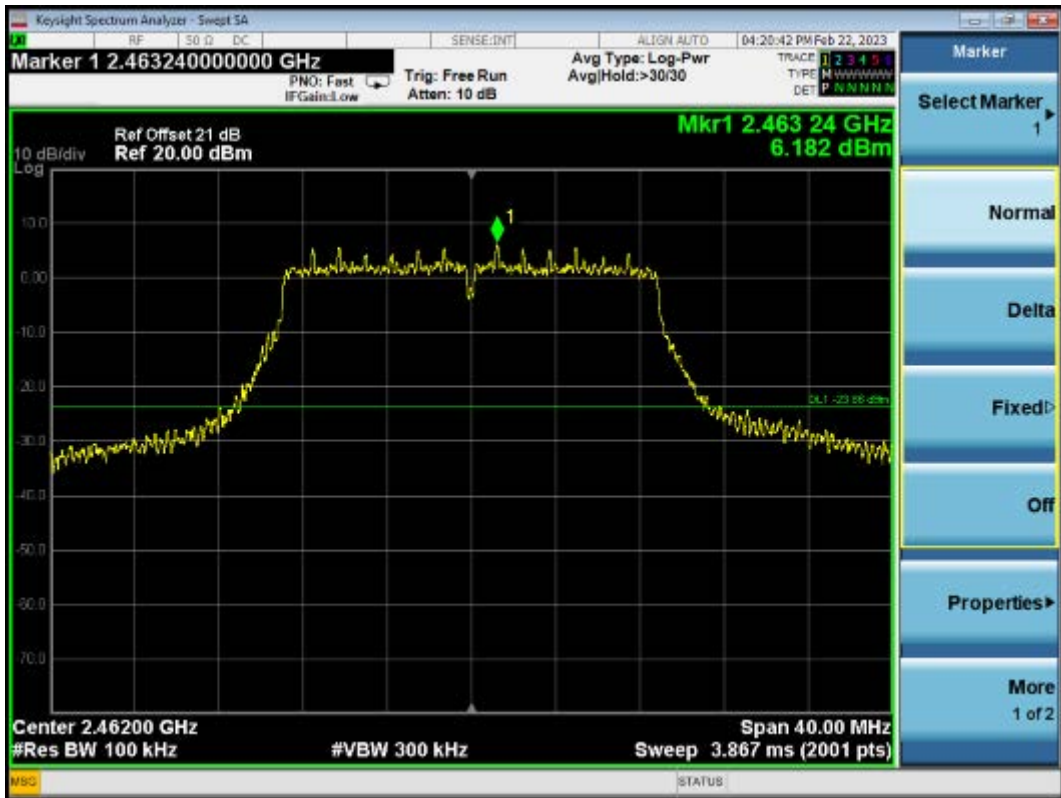


Emission level

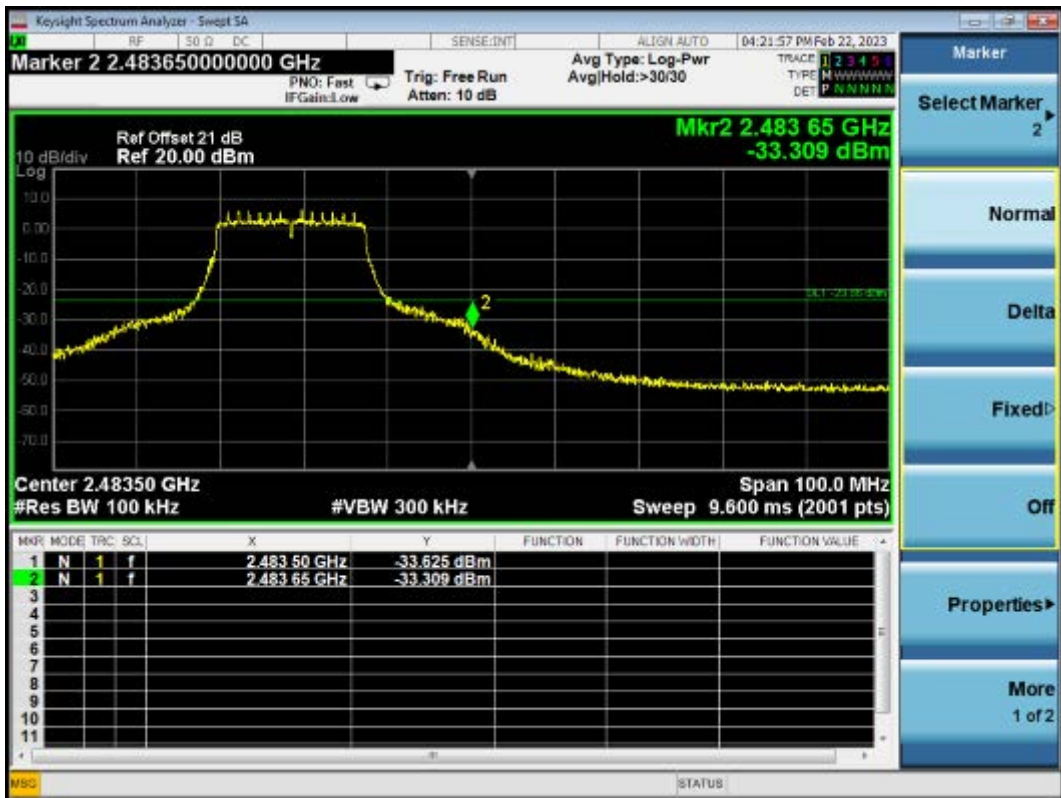

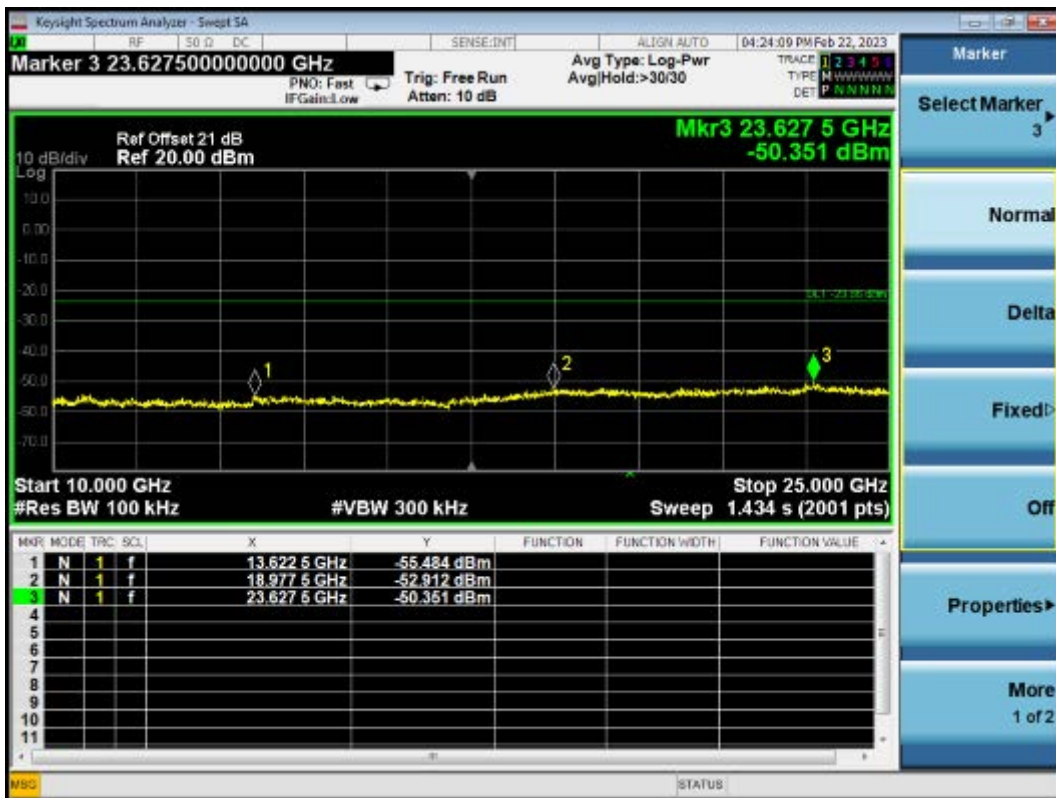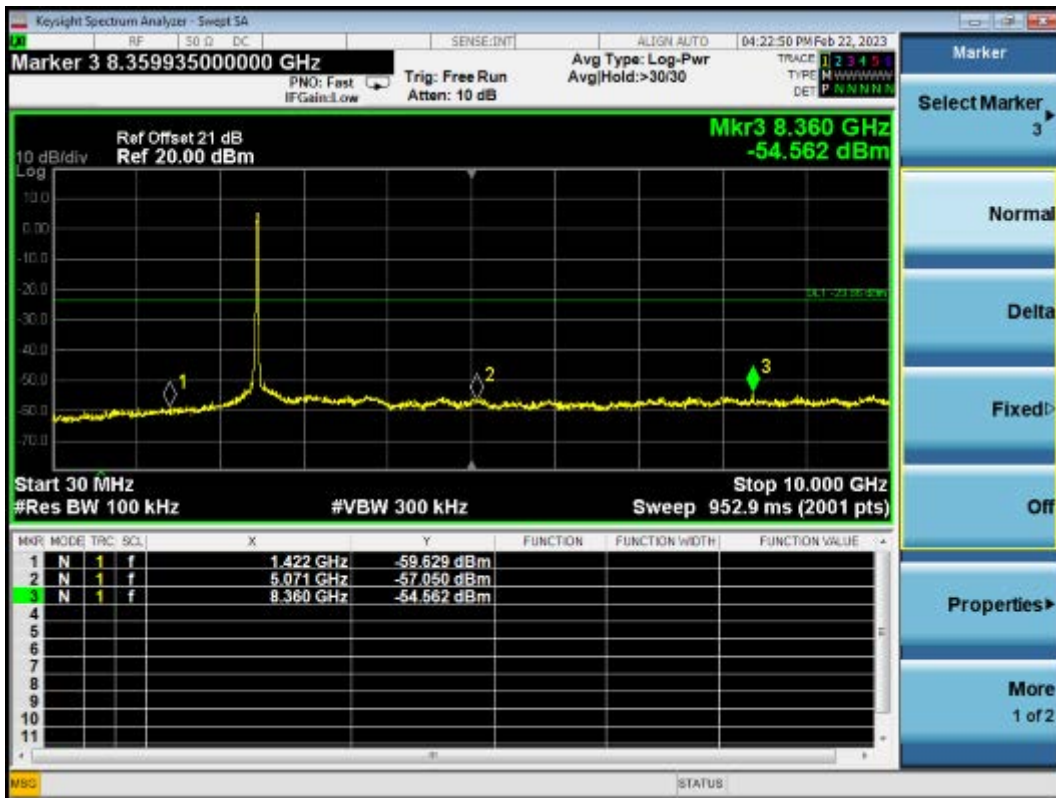



802.11n40 CH2422MHz

Reference level

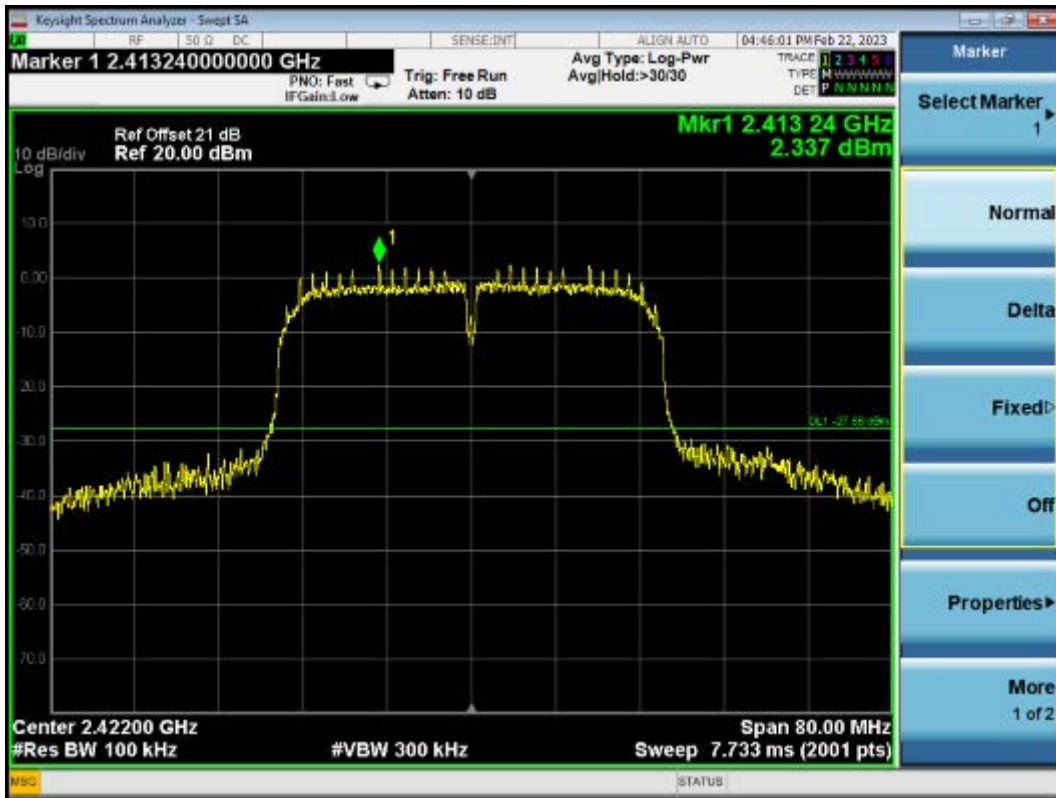


Emission level



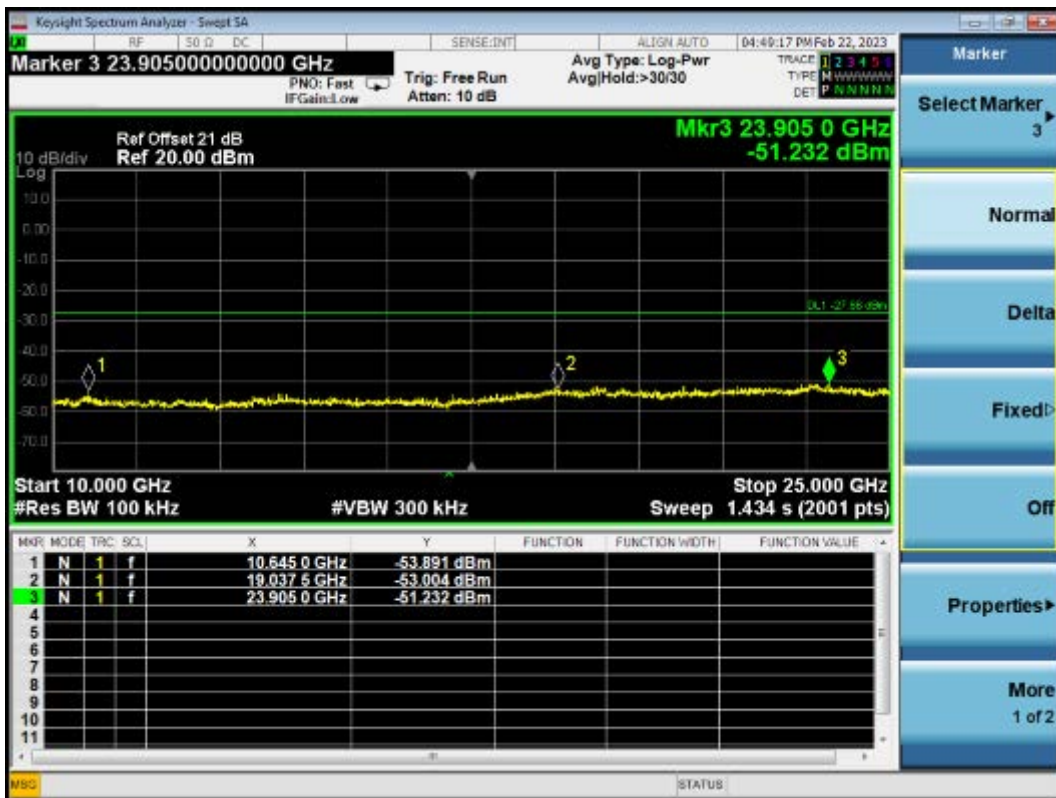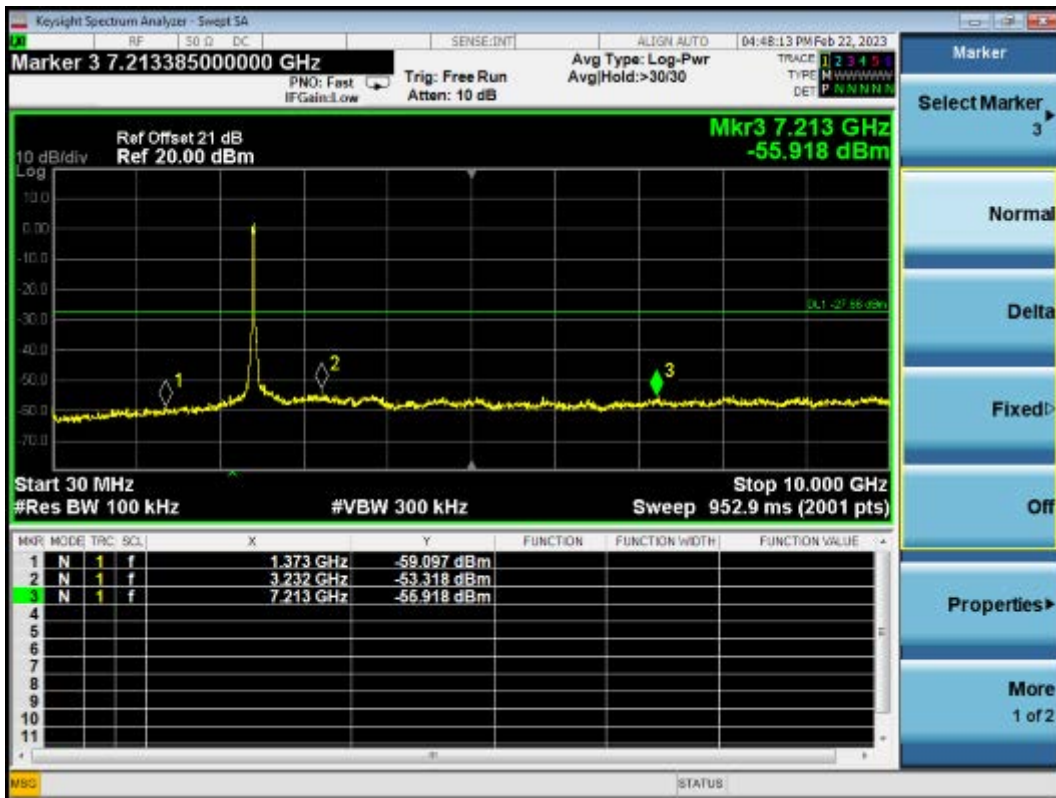


802.11n40 CH2437MHz

Reference level

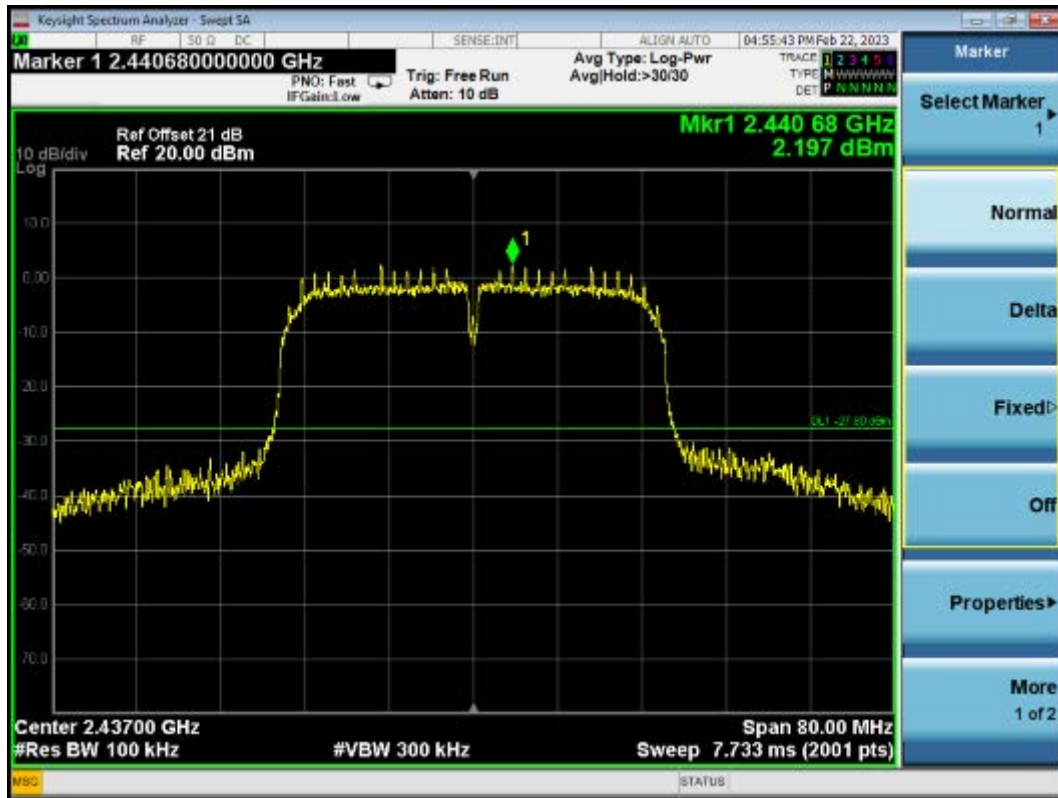


Emission level

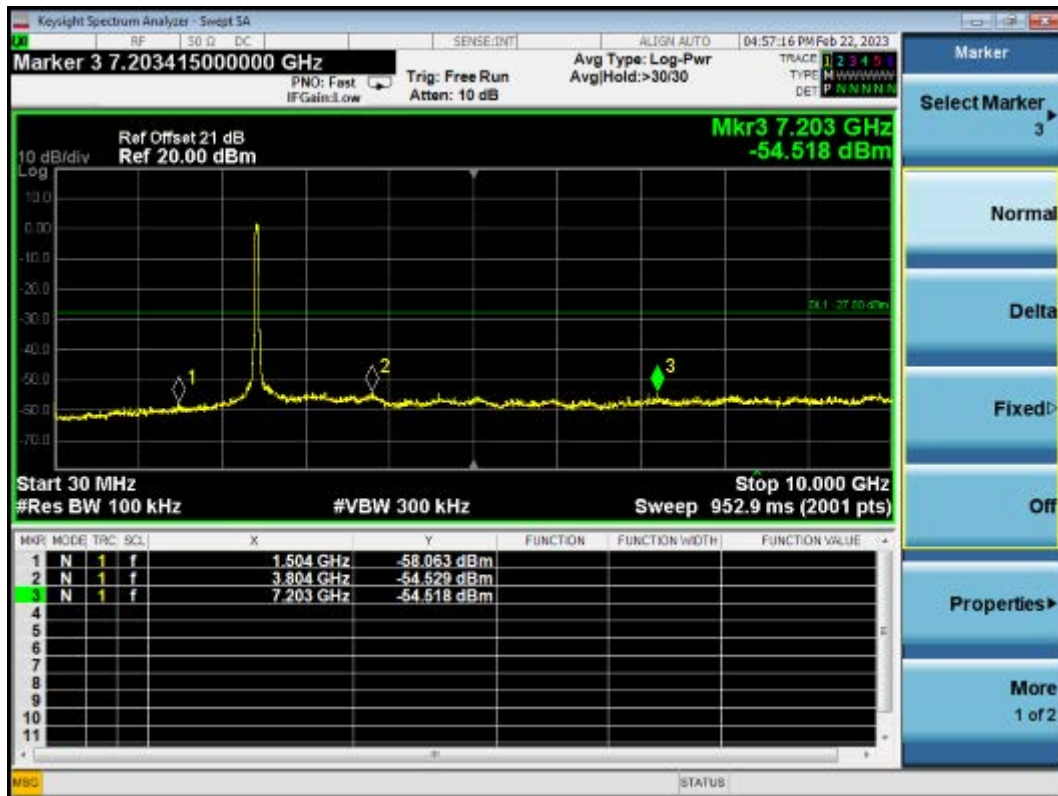





802.11n40 CH2452MHz

Reference level

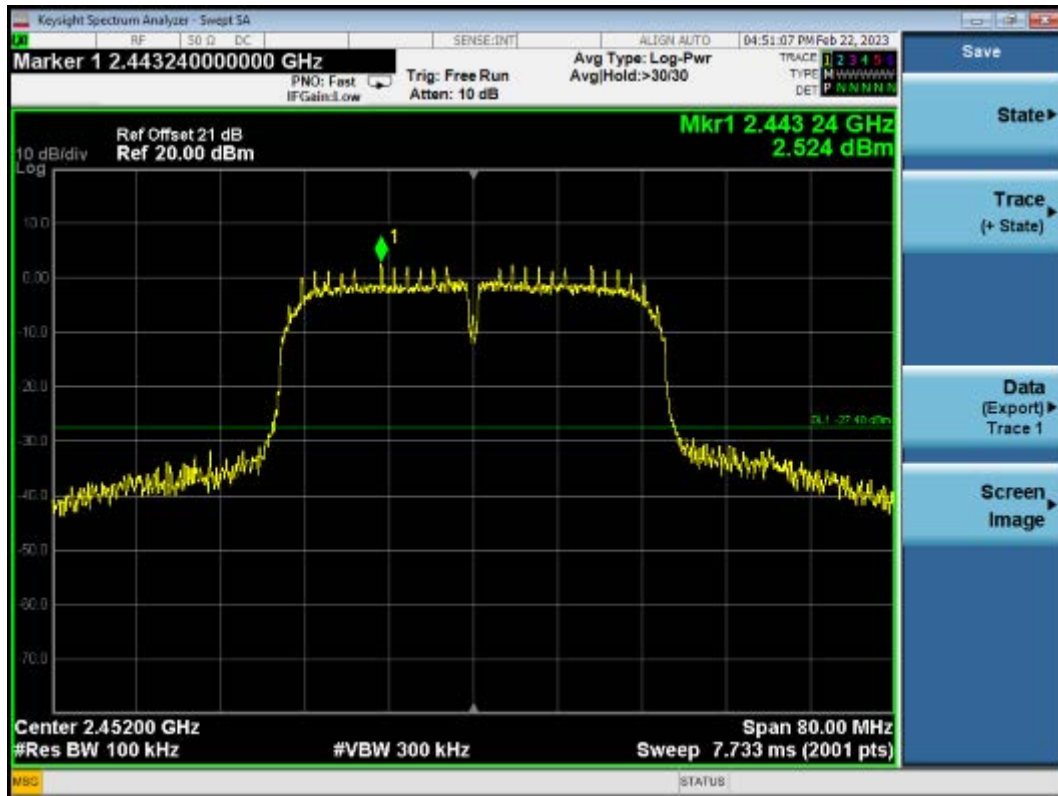

Emission level



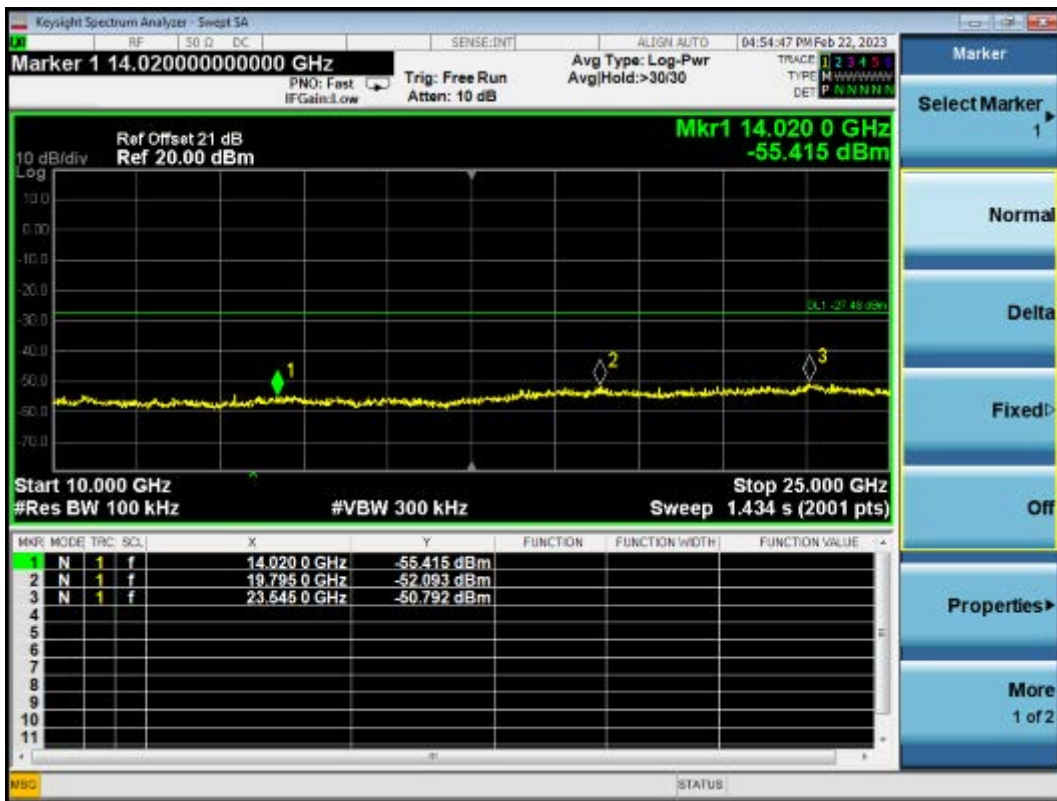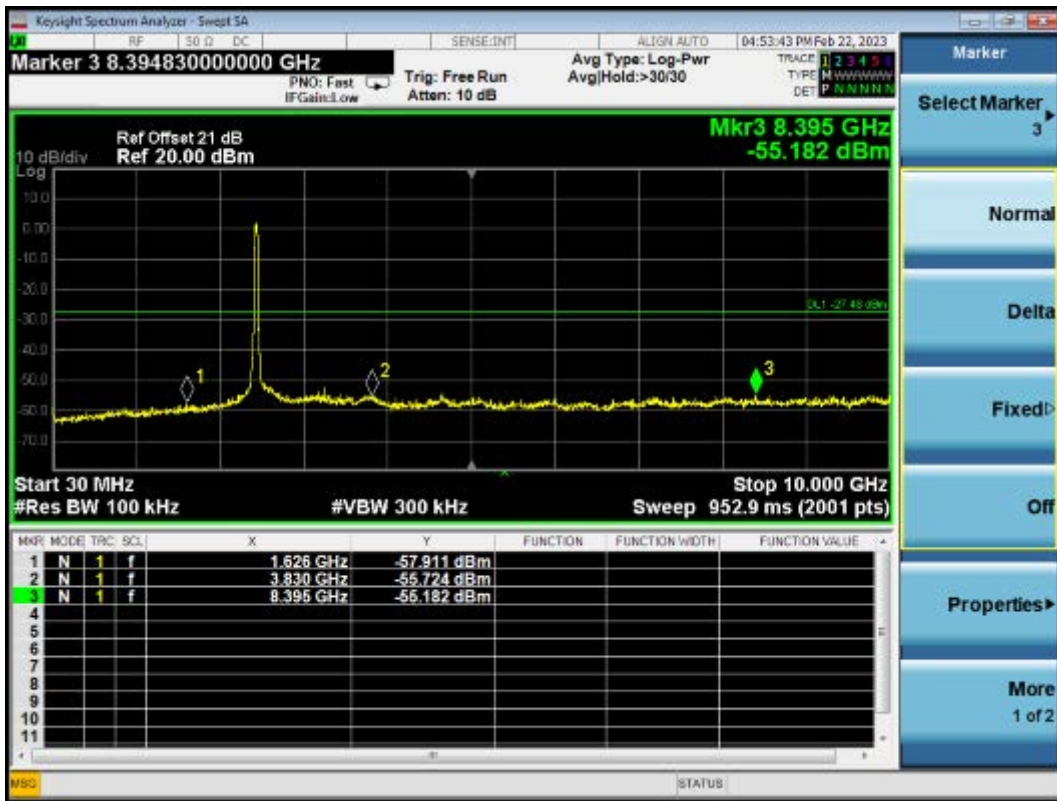

9 POWER SPECTRAL DENSITY MEASUREMENT

9.1 Test Equipment

The following test equipment was used during the power spectral density measurement:

Item	Type	Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Interval
1.	Spectrum Analyzer	Agilent	N9010A	MY52221182	2022.09.15	1 Year
2.	Coaxial Cable	WOKEN	SFL402-105F LEX	F02-150819- 045	2023.02.22	1 Year
3.	20 dB Attenuator	Mini-Circuits	BW-S20W2+	001	2022.08.06	1 Year

9.2 Block Diagram of Test Setup

The Same as section 5.2.

9.3 Specification Limits (§15.247(e))

The peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band.

9.4 Operating Condition of EUT

The software as section 2.3 was used to enable the EUT to change the test mode one by one.

9.5 Test Procedure

The transmitter output was connected to the spectrum analyzer.

Method AVGPSD-1A uses rms detection with slow sweep speed and EUT transmitting continuously at full power.

- a) Set analyzer center frequency to DTS channel center frequency.
- b) Set the span to 1.5 times the DTS bandwidth.
- c) Set the RBW to $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
- d) Set the VBW $\geq [3 \times \text{RBW}]$.
- e) Detector = power averaging (rms) or sample detector (when rms not available).
- f) Ensure that the number of measurement points in the sweep $\geq [2 \times \text{span} / \text{RBW}]$.
- g) Sweep time = auto couple.
- h) Employ trace averaging (rms) mode over a minimum of 100 traces.
- h) Use the peak marker function to determine the maximum amplitude level.
- i) If the measured value exceeds requirement, then reduce RBW (but no less than 3 kHz) and repeat (note that this may require zooming in on the emission of interest and reducing the span to meet the minimum measurement point requirement as the RBW is reduced).

The test procedure is defined in ANSI C63.10-2013 (11.10.3 Measurement Procedure “Method AVGPSD-1” was used).

9.6 Test Results

PASSED.

All the test results are attached in next pages.


(Test Date: 2023.03.29 Temperature: 23°C Humidity: 51 %)

Mode	Channel	Frequency (MHz)	Power Spectral Density (dBm)	Limit
802.11b	1	2412	-13.818	8 dBm
	6	2437	-13.446	8 dBm
	11	2462	-12.695	8 dBm
802.11g	1	2412	-15.909	8 dBm
	6	2437	-16.155	8 dBm
	11	2462	-15.902	8 dBm
802.11n20	1	2412	-16.197	8 dBm
	6	2437	-16.684	8 dBm
	11	2462	-16.549	8 dBm
802.11n40	3	2422	-18.367	8 dBm
	6	2437	-18.303	8 dBm
	9	2452	-17.915	8 dBm


802.11b CH2412 MHz




802.11b CH2437 MHz

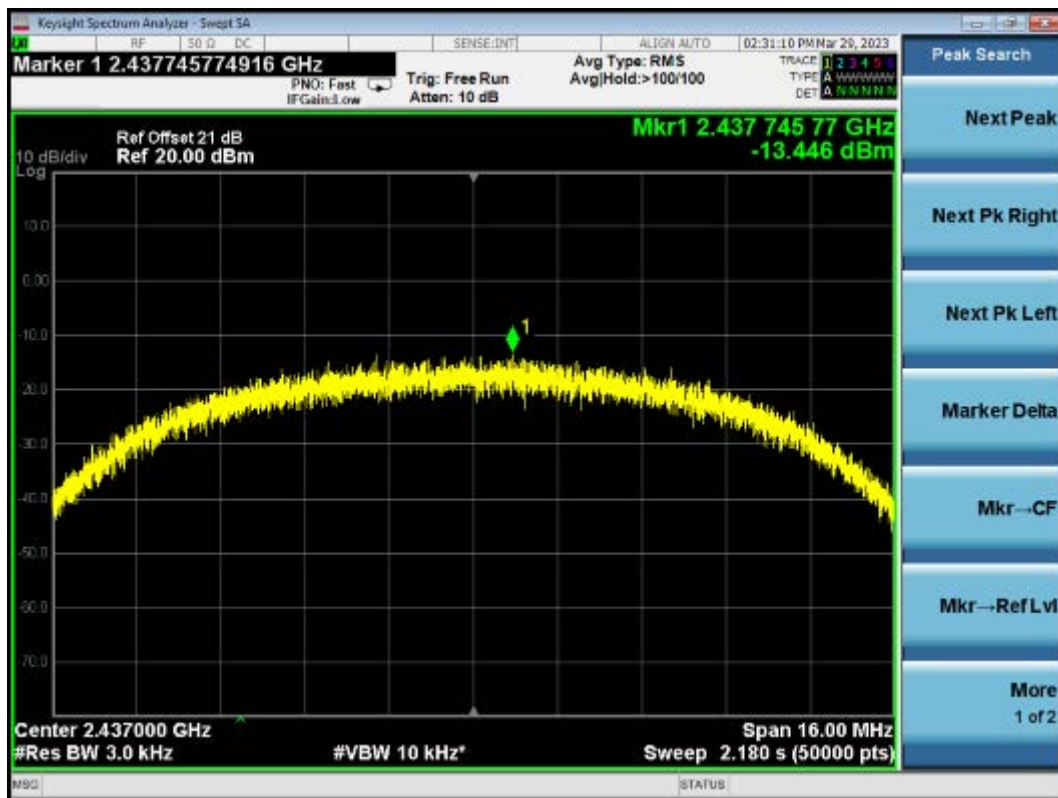


802.11b CH2462 MHz

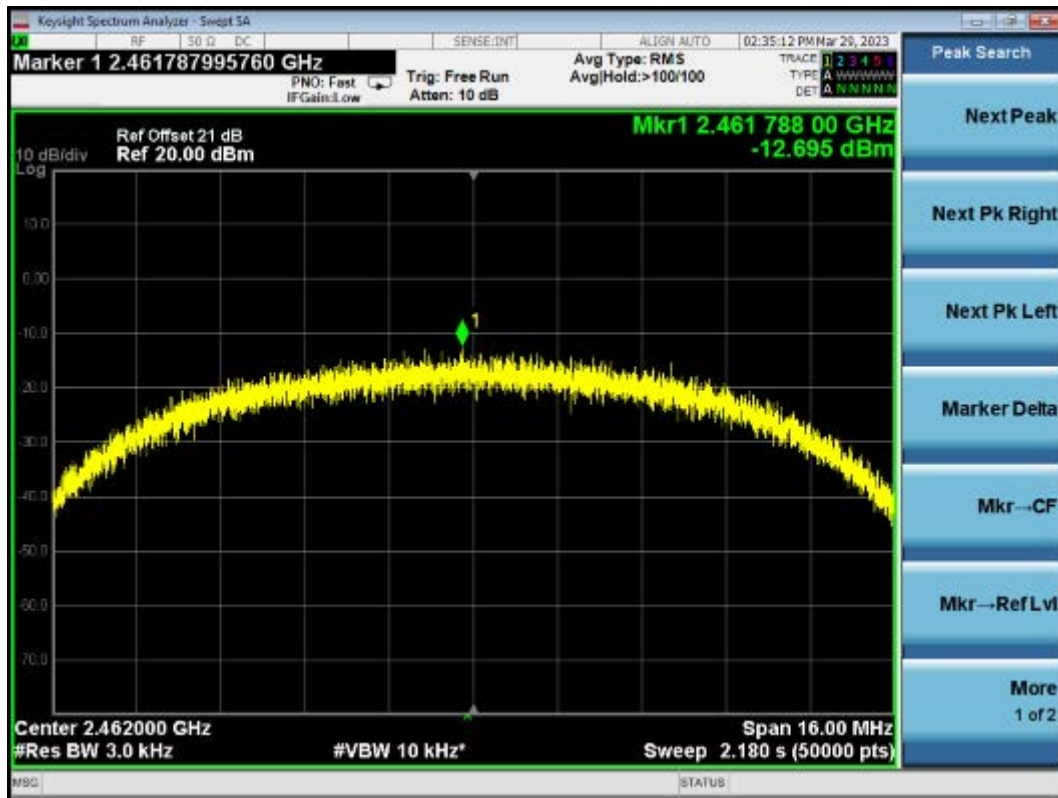


802.11g CH2412 MHz

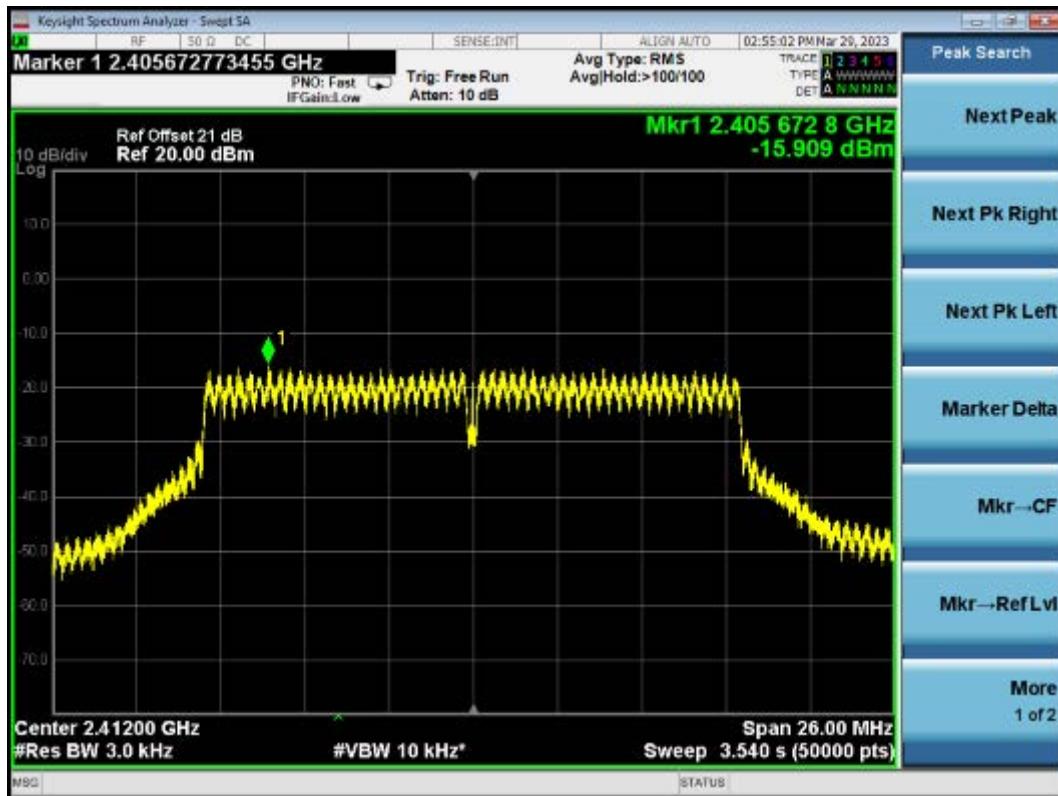


802.11g CH2437 MHz

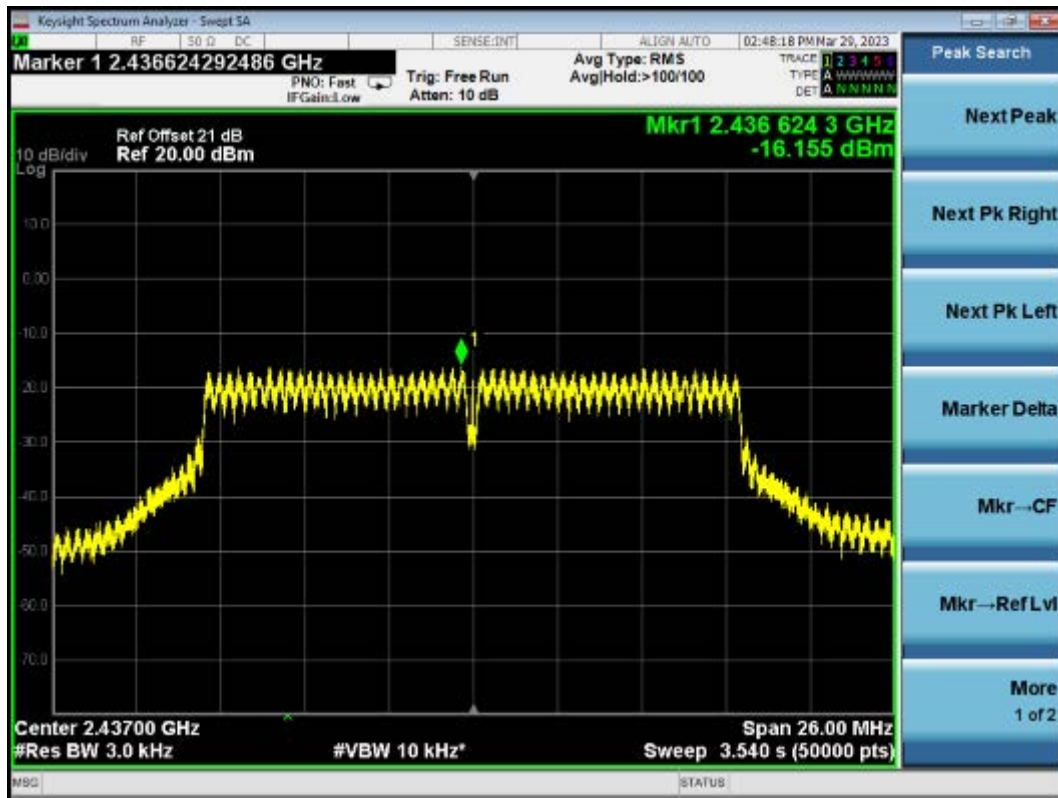


802.11g CH2462 MHz

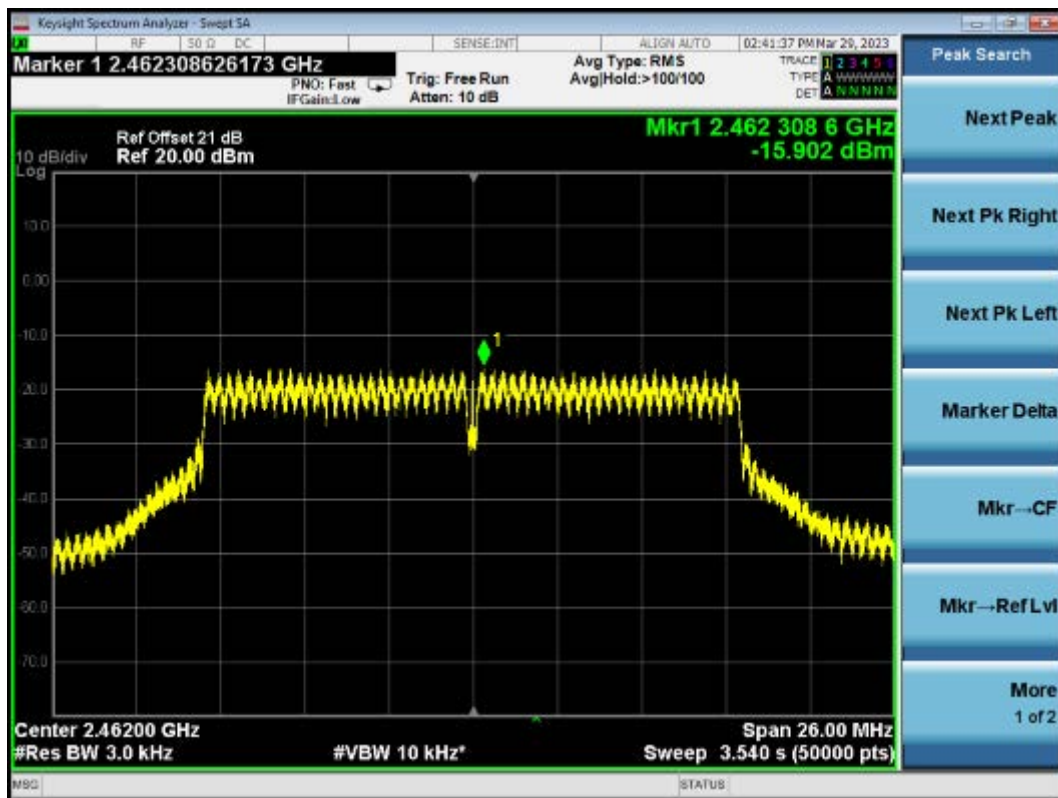


802.11n20 CH2412 MHz

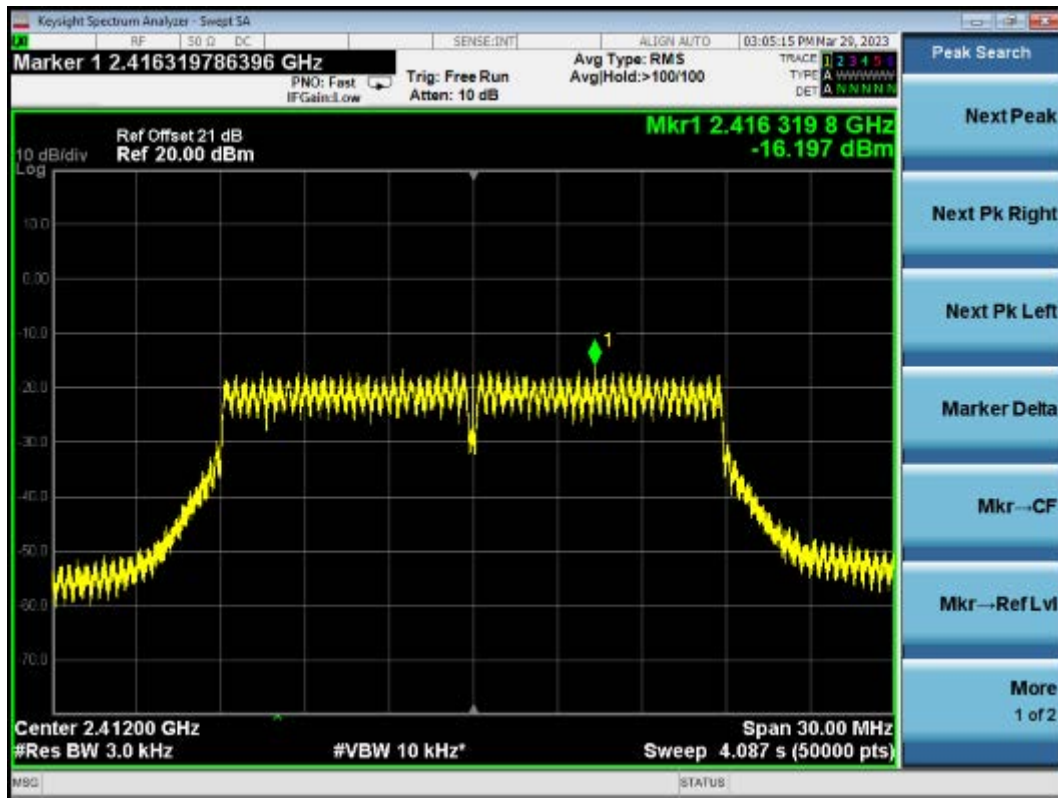


802.11n20 CH2437 MHz

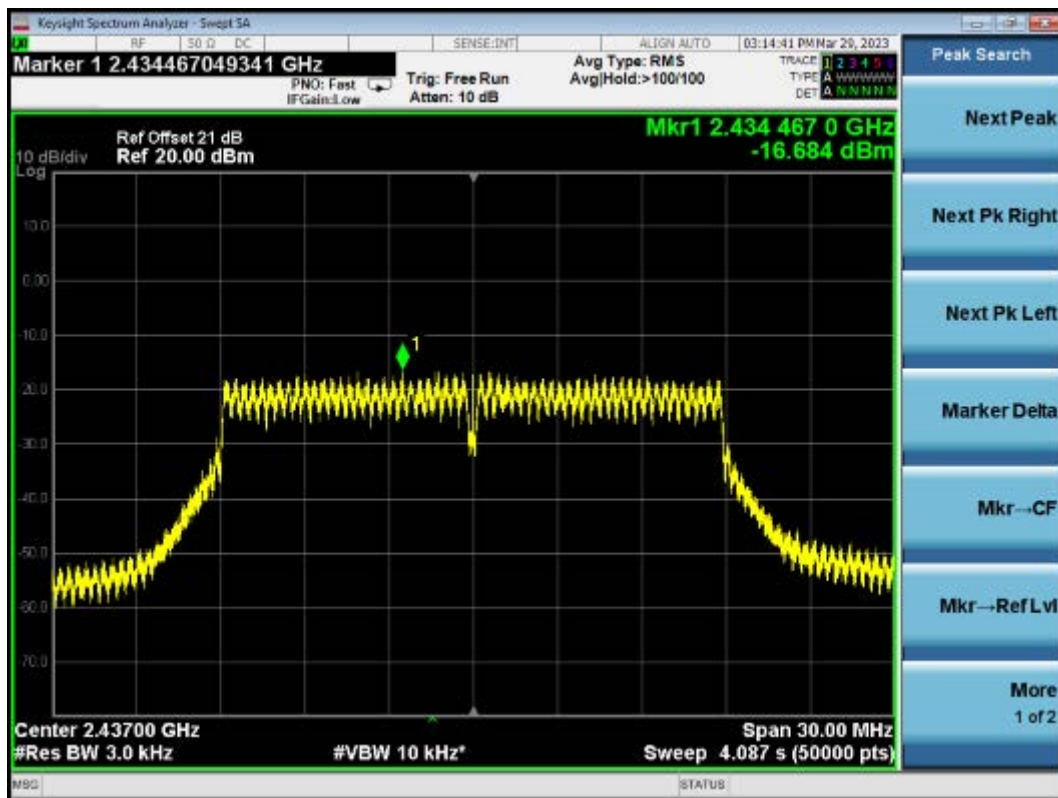


802.11n20 CH2462 MHz

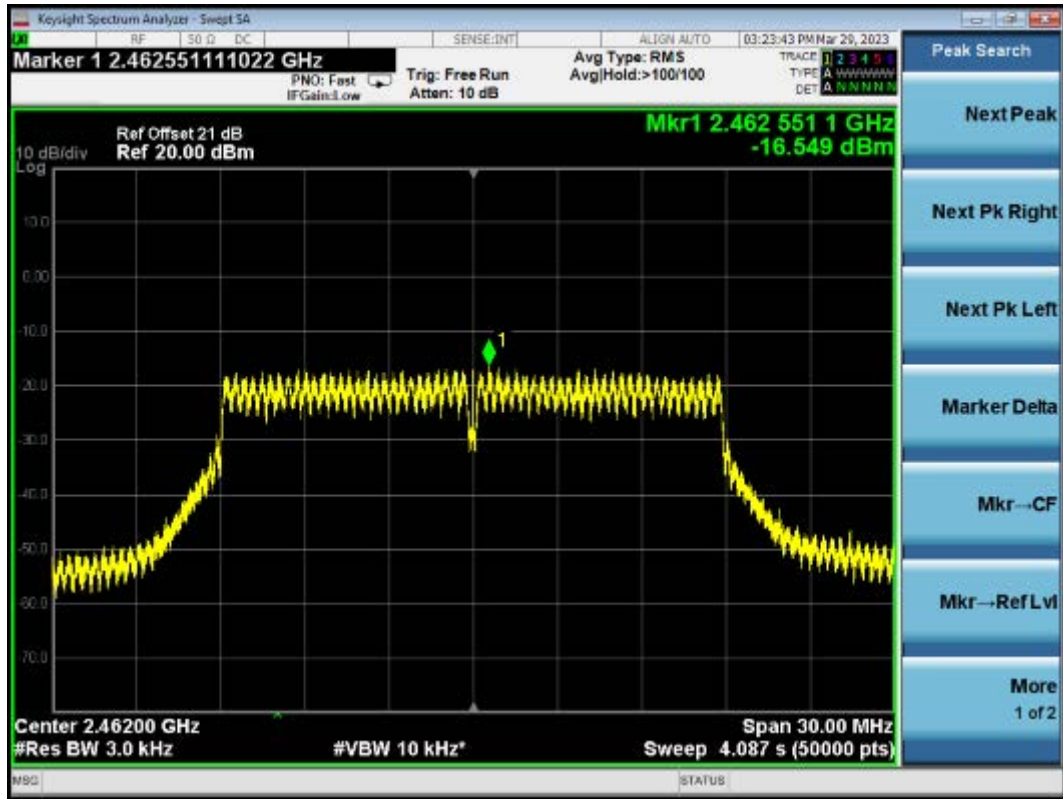


802.11n40 CH2422 MHz

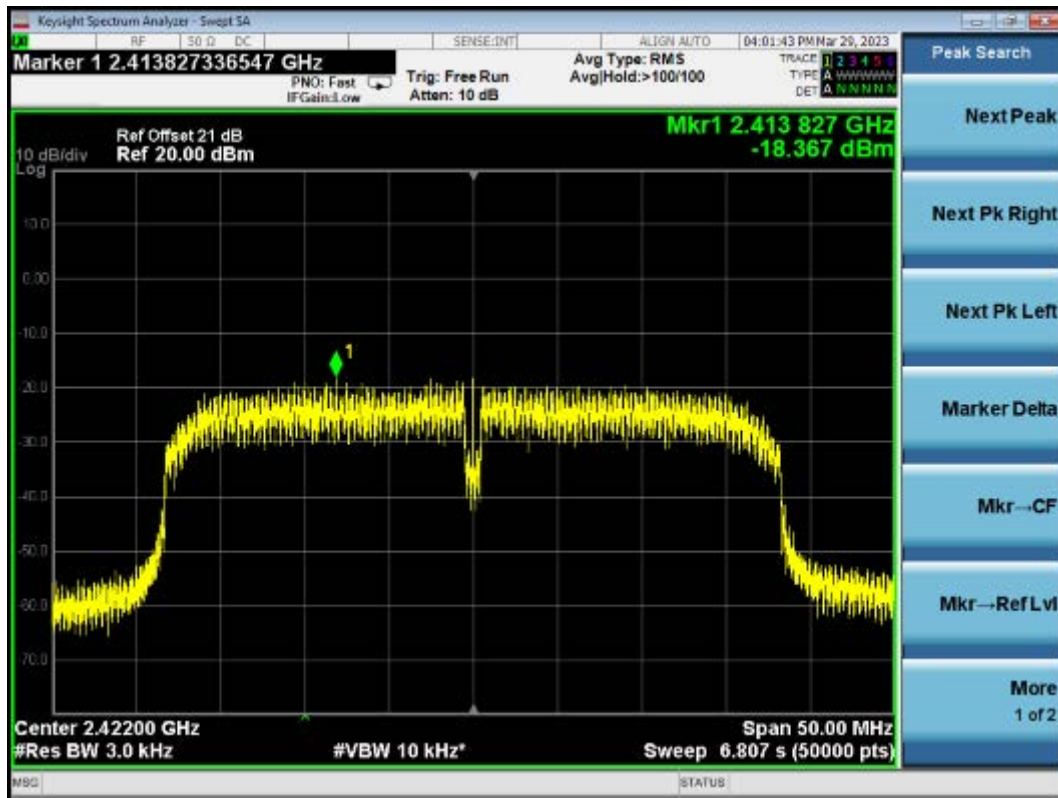

802.11n40 CH2437 MHz

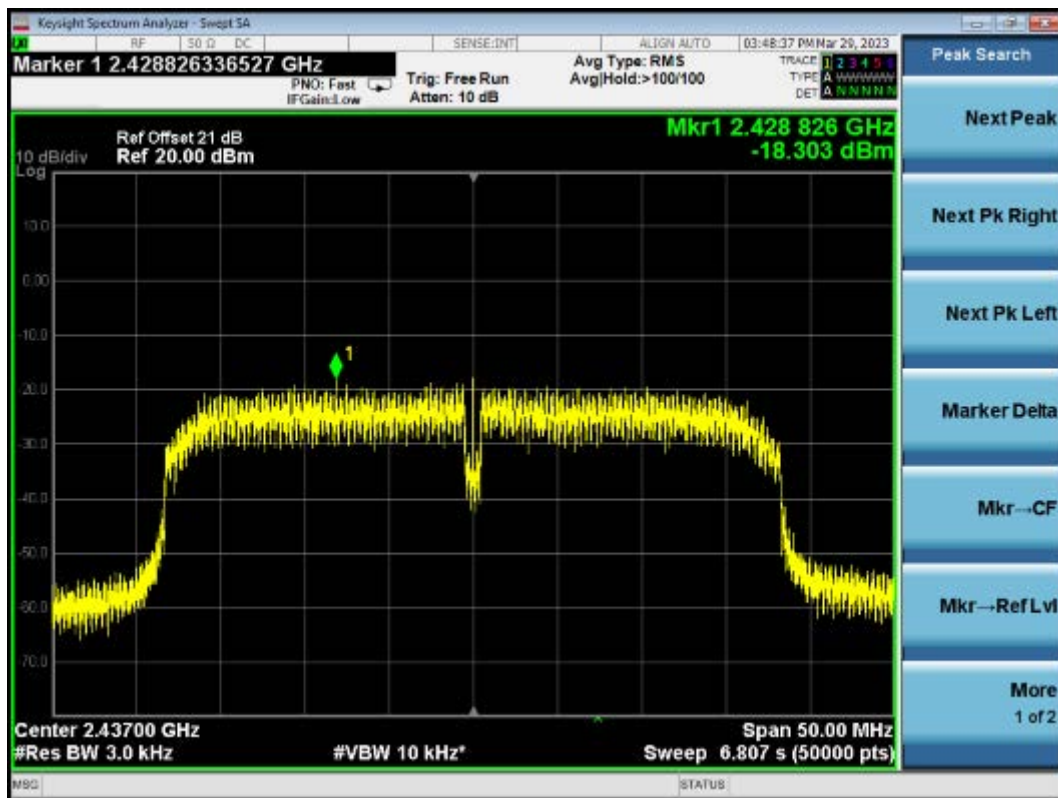

802.11n40 CH2452 MHz

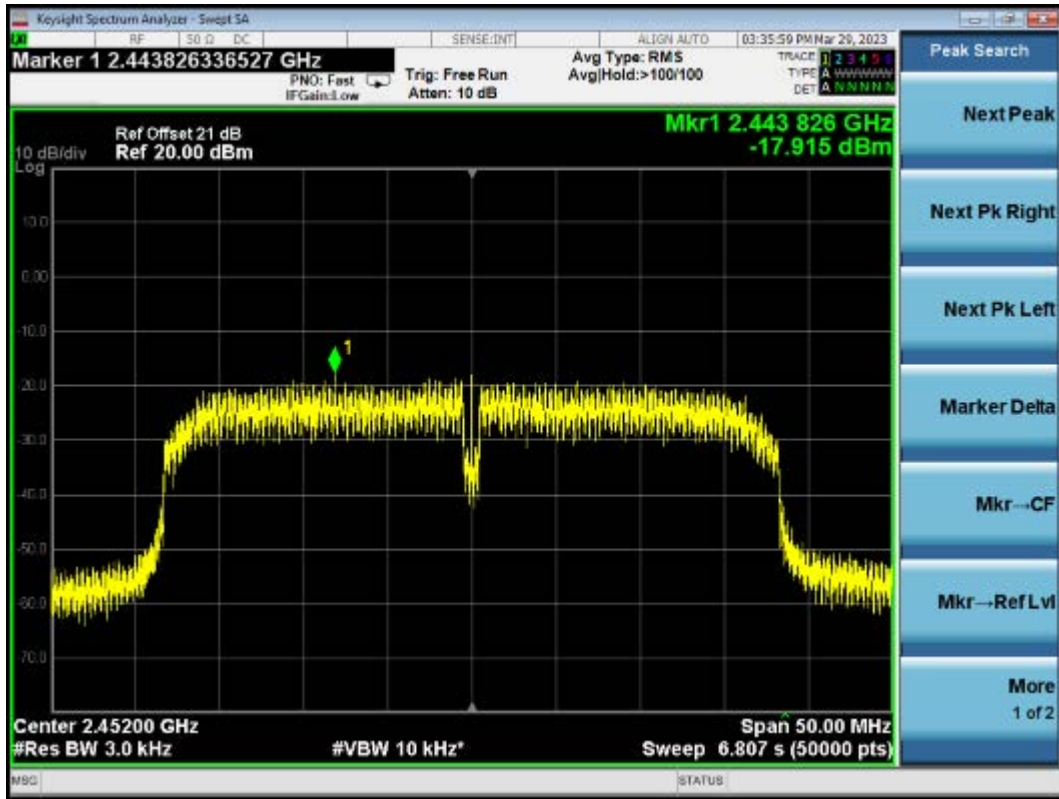

10 ANTENNA REQUIREMENT

10.1 Specification Limits (§15.203)

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

10.2 Result

According to KDB 353028 D1, the following describes the three ways that can be used to demonstrate compliance to Section 15.203: a) Antenna permanently attached. b) Unique (non-standard) antenna connector. c) Professional installation.
For this product, the antenna is: <input checked="" type="checkbox"/> Antenna permanently attached <input type="checkbox"/> Unique (non-standard) antenna connector <input type="checkbox"/> Professional installation <input type="checkbox"/> not meet any of ways list above that <input checked="" type="checkbox"/> compliant <input type="checkbox"/> not compliant with the requirement of Section 15.203.

11 DEVIATION TO TEST SPECIFICATIONS

None.

12 MEASUREMENT UNCERTAINTY LIST

The measurement uncertainty was estimated for test on the EUT according to CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage of K=2.

The uncertainties value is not used in determining the PASS/FAIL results.

Test Items/Facilities	Frequency/Equipment/Unit	Uncertainty
Conducted Emission No.1 Shielded Room	9kHz~150kHz	±3.1 dB
	150kHz~30MHz	±2.6 dB
Conducted Emission No.3 Shielded Room	9kHz~150kHz	±3.1 dB
	150kHz~30MHz	±2.6 dB
Radiated Emission	30MHz~200MHz, Horizontal	±3.8 dB
	30MHz~200MHz, Vertical	±4.1 dB
	200MHz~1000MHz, Horizontal	±3.6 dB
	200MHz~1000MHz, Vertical	±5.1 dB
	1GHz~6GHz	±5.3 dB
	6GHz~18GHz	±5.3 dB
	18GHz~40GHz	±3.5 dB
Output Power Test	50MHz~18GHz	0.77 dB
Power Density Test	9kHz~6GHz	1.08 dB
RF Frequency Test	9kHz~40GHz	6×10^{-4}
Bandwidth Test	9kHz~6GHz	1.5×10^{-3}
RF Radiated Power Test	30MHz~1000MHz	3.06 dB
Conducted Output Power Test	50MHz~18GHz	0.83 dB
AC Voltage(<10kHz) Test	120V~230V	0.04 %
DC Power Test	0V~30V	0.4 %
Temperature	-40°C~+100°C	0.52 °C
Humidity	30%~95%	2.6 %