



Antenna Specification (9290035626 Mode)

Model: RFFPA203007IMAB401 (Zigbee)

Model: RFFPA203006IMLB402 (WiFi)

Manufacturer:WALSIN TECHNOLOGY CORP.

Address: 24 F., No. 1, Songzhi Rd., Xinyi Dist., Taipei City 110411, Taiwan

Brand: WALSIN

Date : Jun. 27, 2023

Prepared by : Carl Hung



Outline


- Antenna Structure & Placement
- Test Setup
- Return Loss & Isolation
- Radiation Pattern
- Peak Gain & Efficiency

Antenna Structure & Placement

WiFi & BLE Antenna




ZigBee Antenna

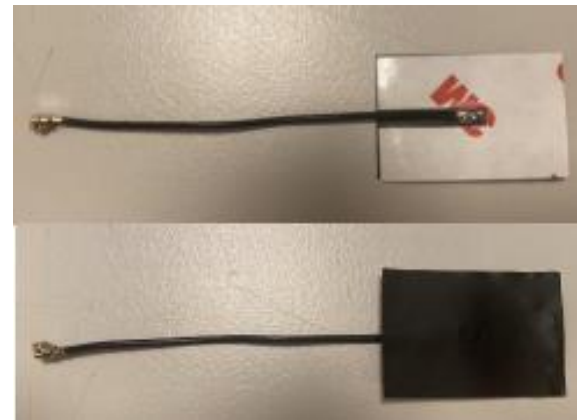




Ant No.	Operating Band	Type	Material	Feeding	Dimension
Ant-1 WiFi & BLE	2400 MHz ~ 2500 MHz 5150 MHz ~ 5850 MHz	Monopole	FPCB	Cable	30(L) x 24(W) x 0.15(T) mm ³
Ant-2 ZigBee	2400 MHz ~ 2500 MHz	Monopole	FPCB	Cable	30(L) x 24(W) x 0.15(T) mm ³

Return Loss & Isolation

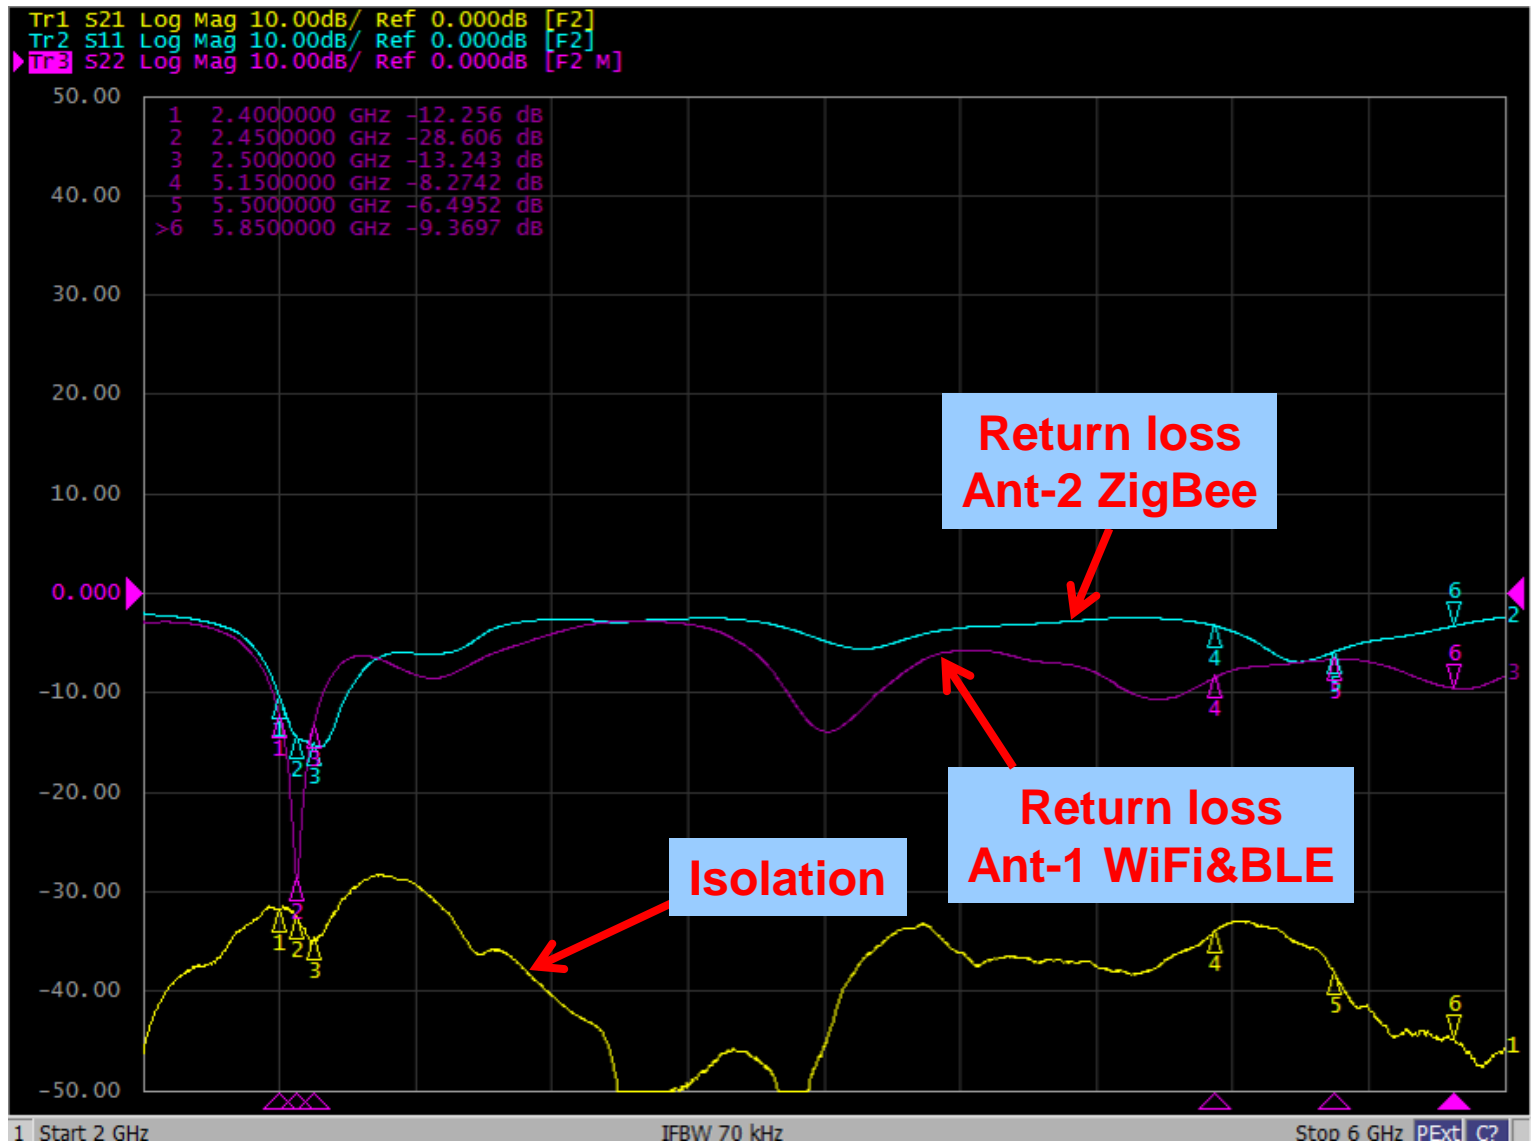


Antenna Measurement Chamber


- ETS AMS-8500 antenna measurement system
- Interior dimensions : 7.32(L)×3.66(W)×3.66(H)m³
- Operating band : 600 MHz – 10 GHz
- Support passive test & active test
- Provide graphic data display

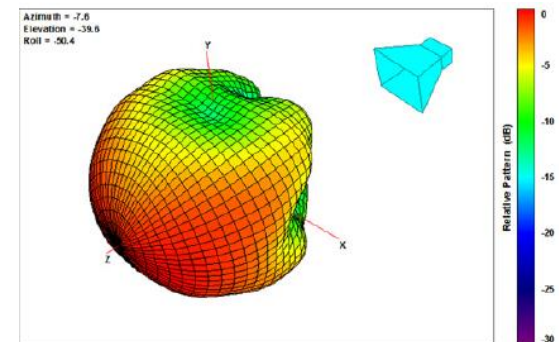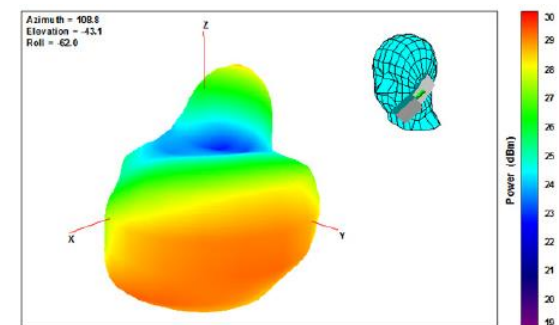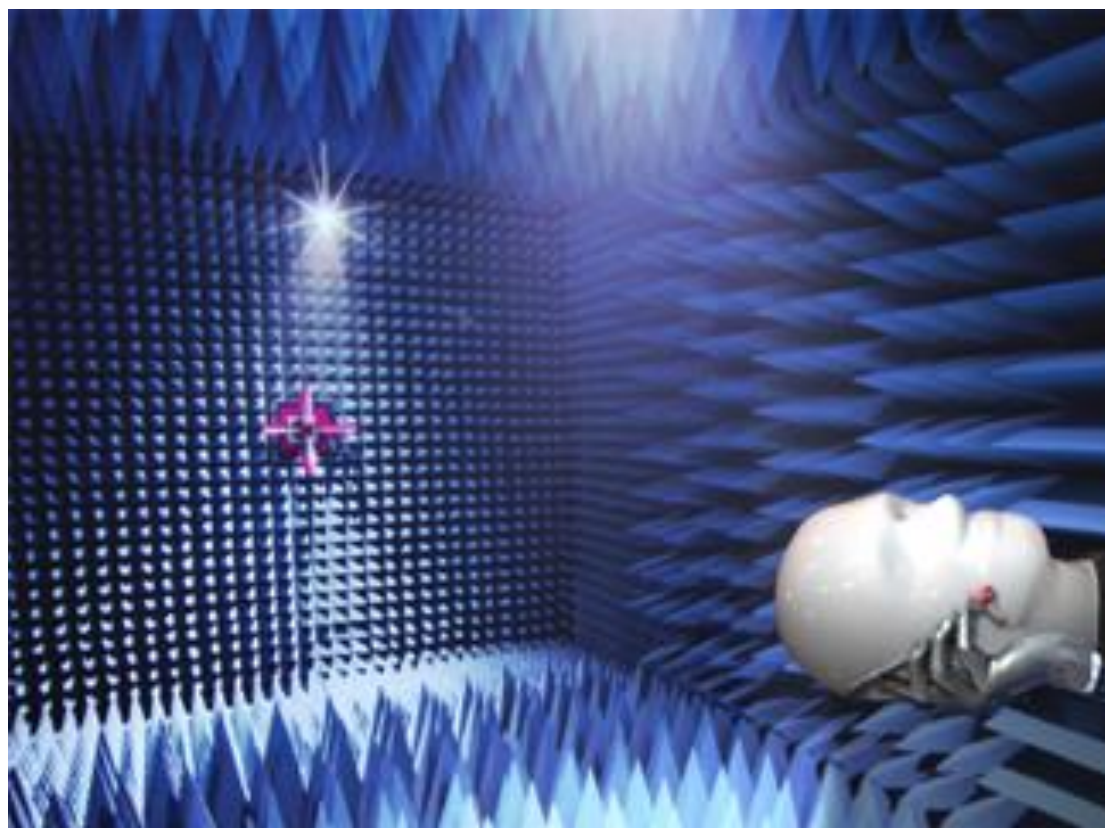


Radiation Pattern – Ant-1 WiFi @ 2450 MHz

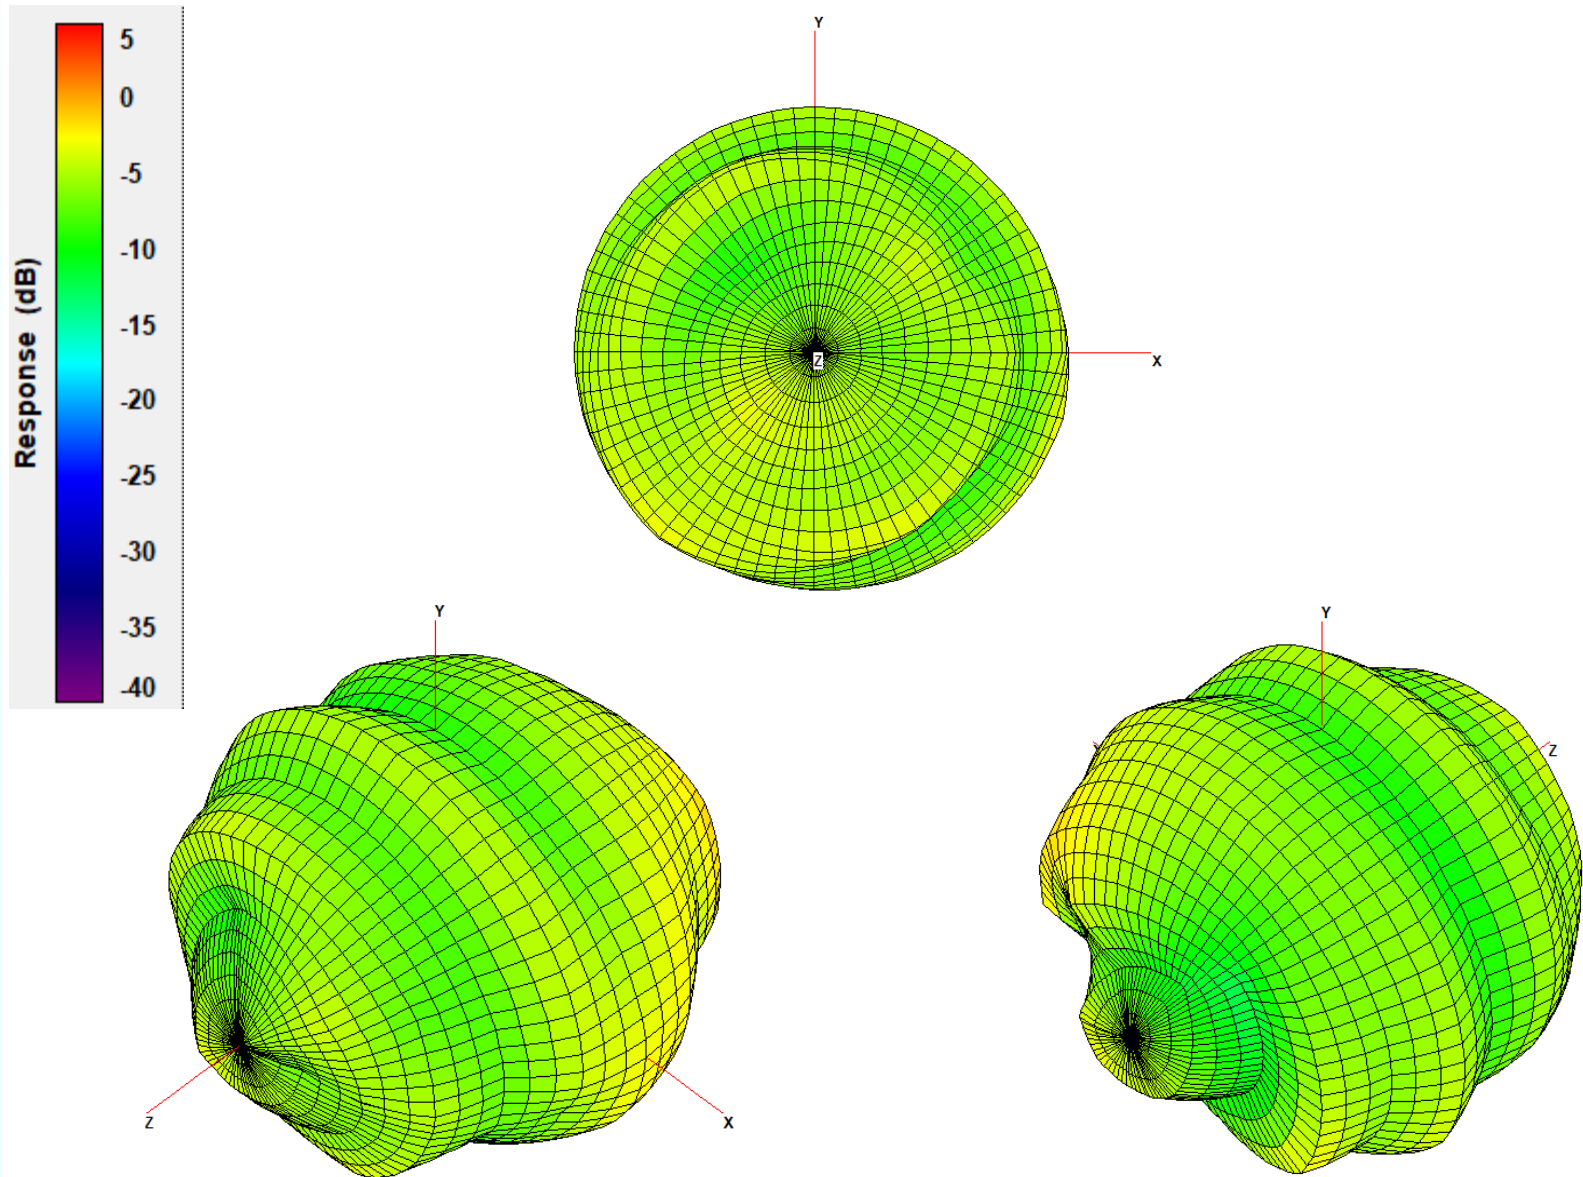


Radiation Pattern – Ant-1 WiFi @ 5500 MHz

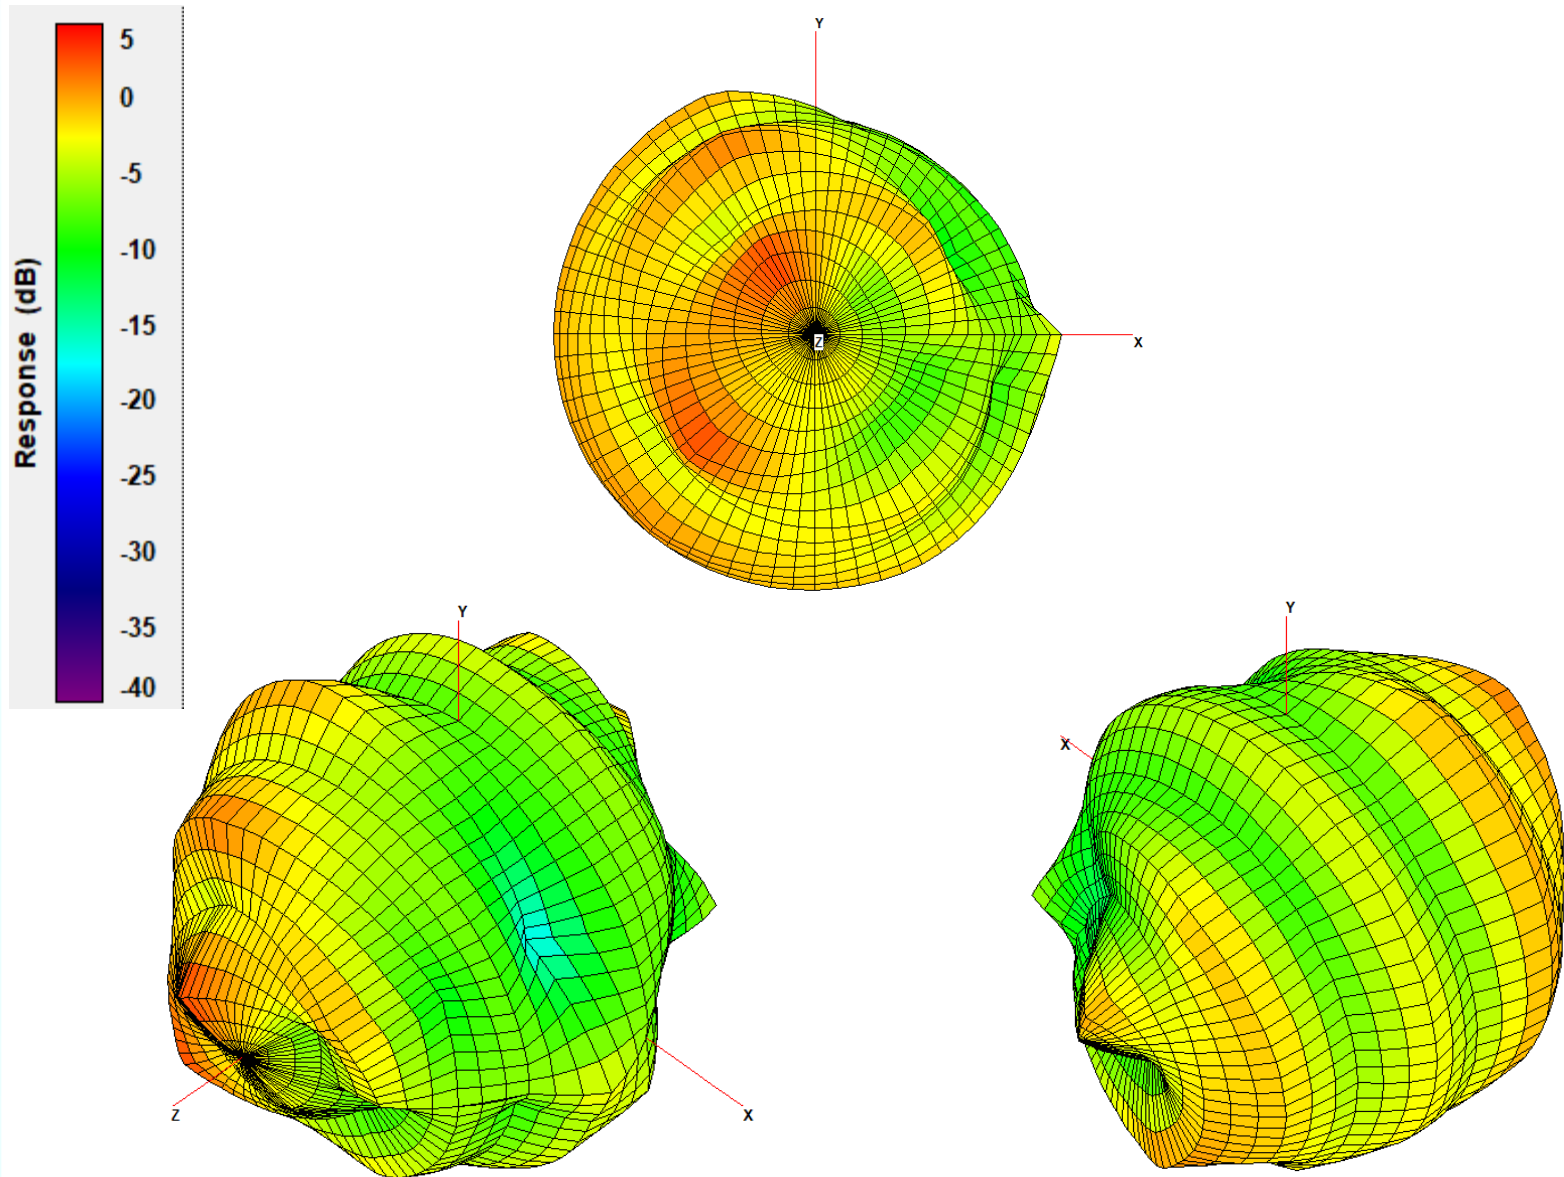

Radiation Pattern – Ant-1 BLE @ 2450 MHz

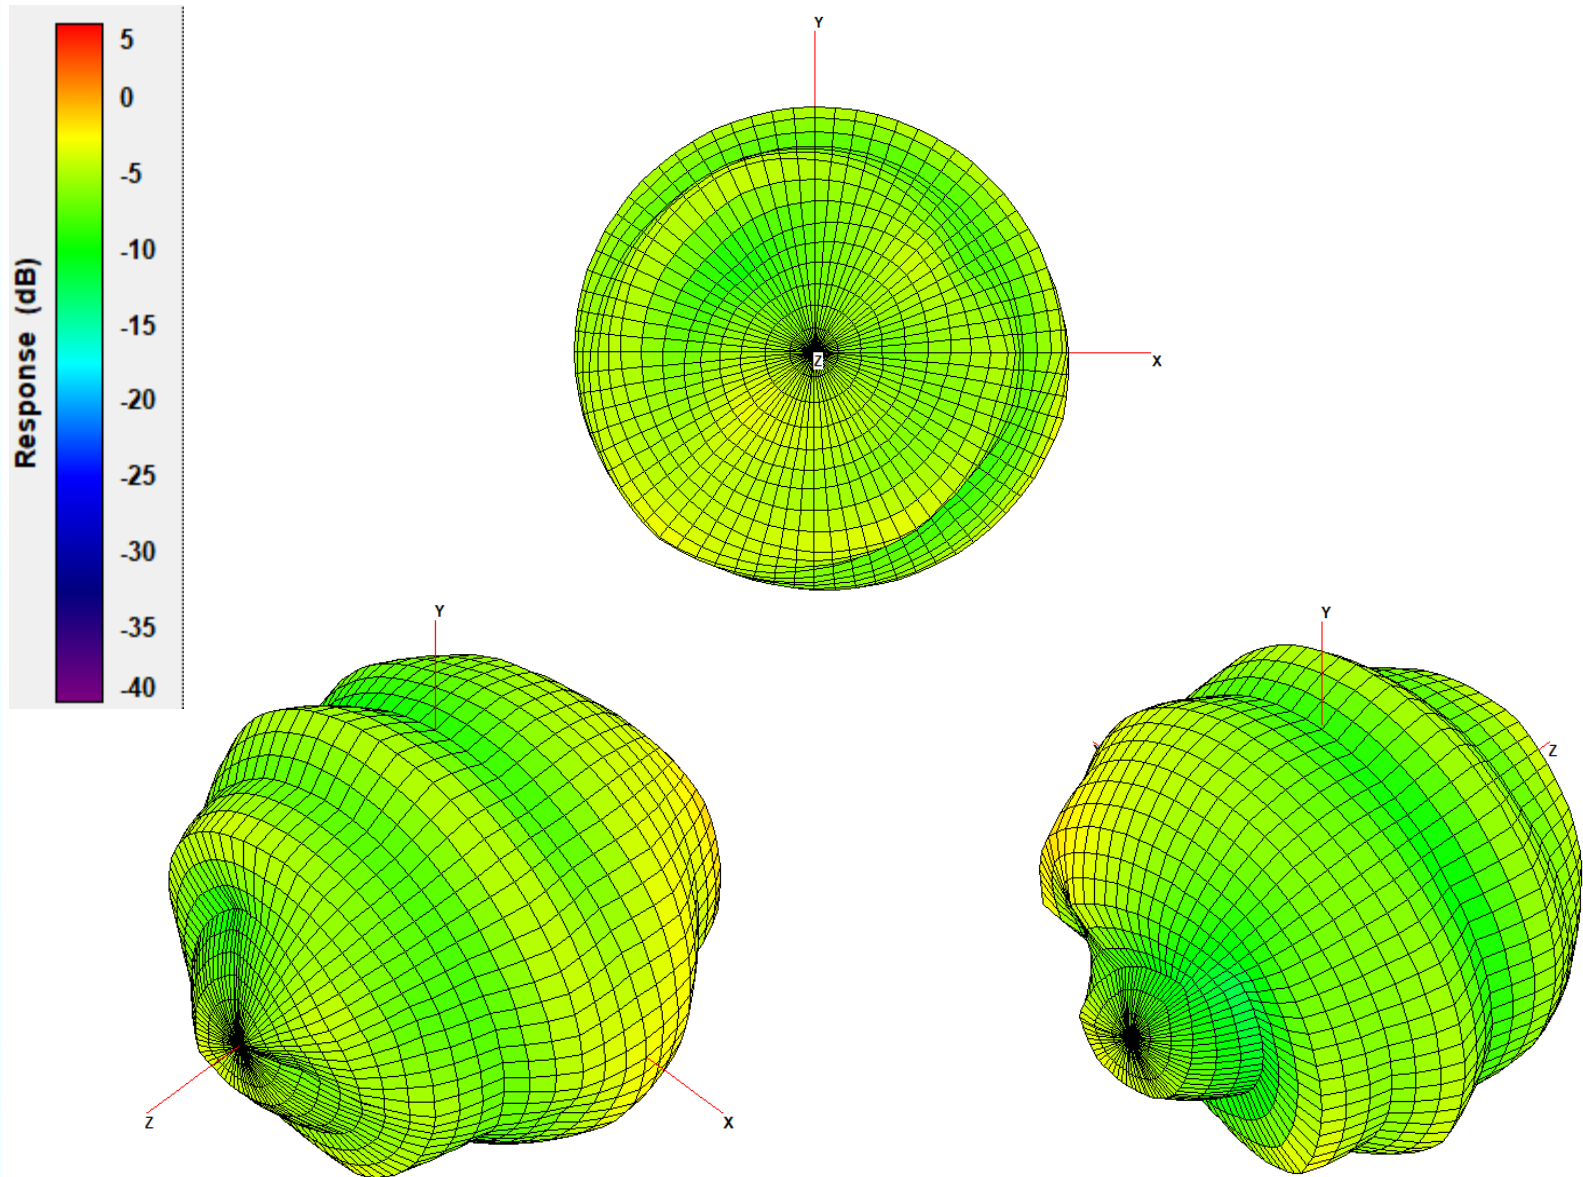

Radiation Pattern – Ant-2 ZigBee @ 2450 MHz

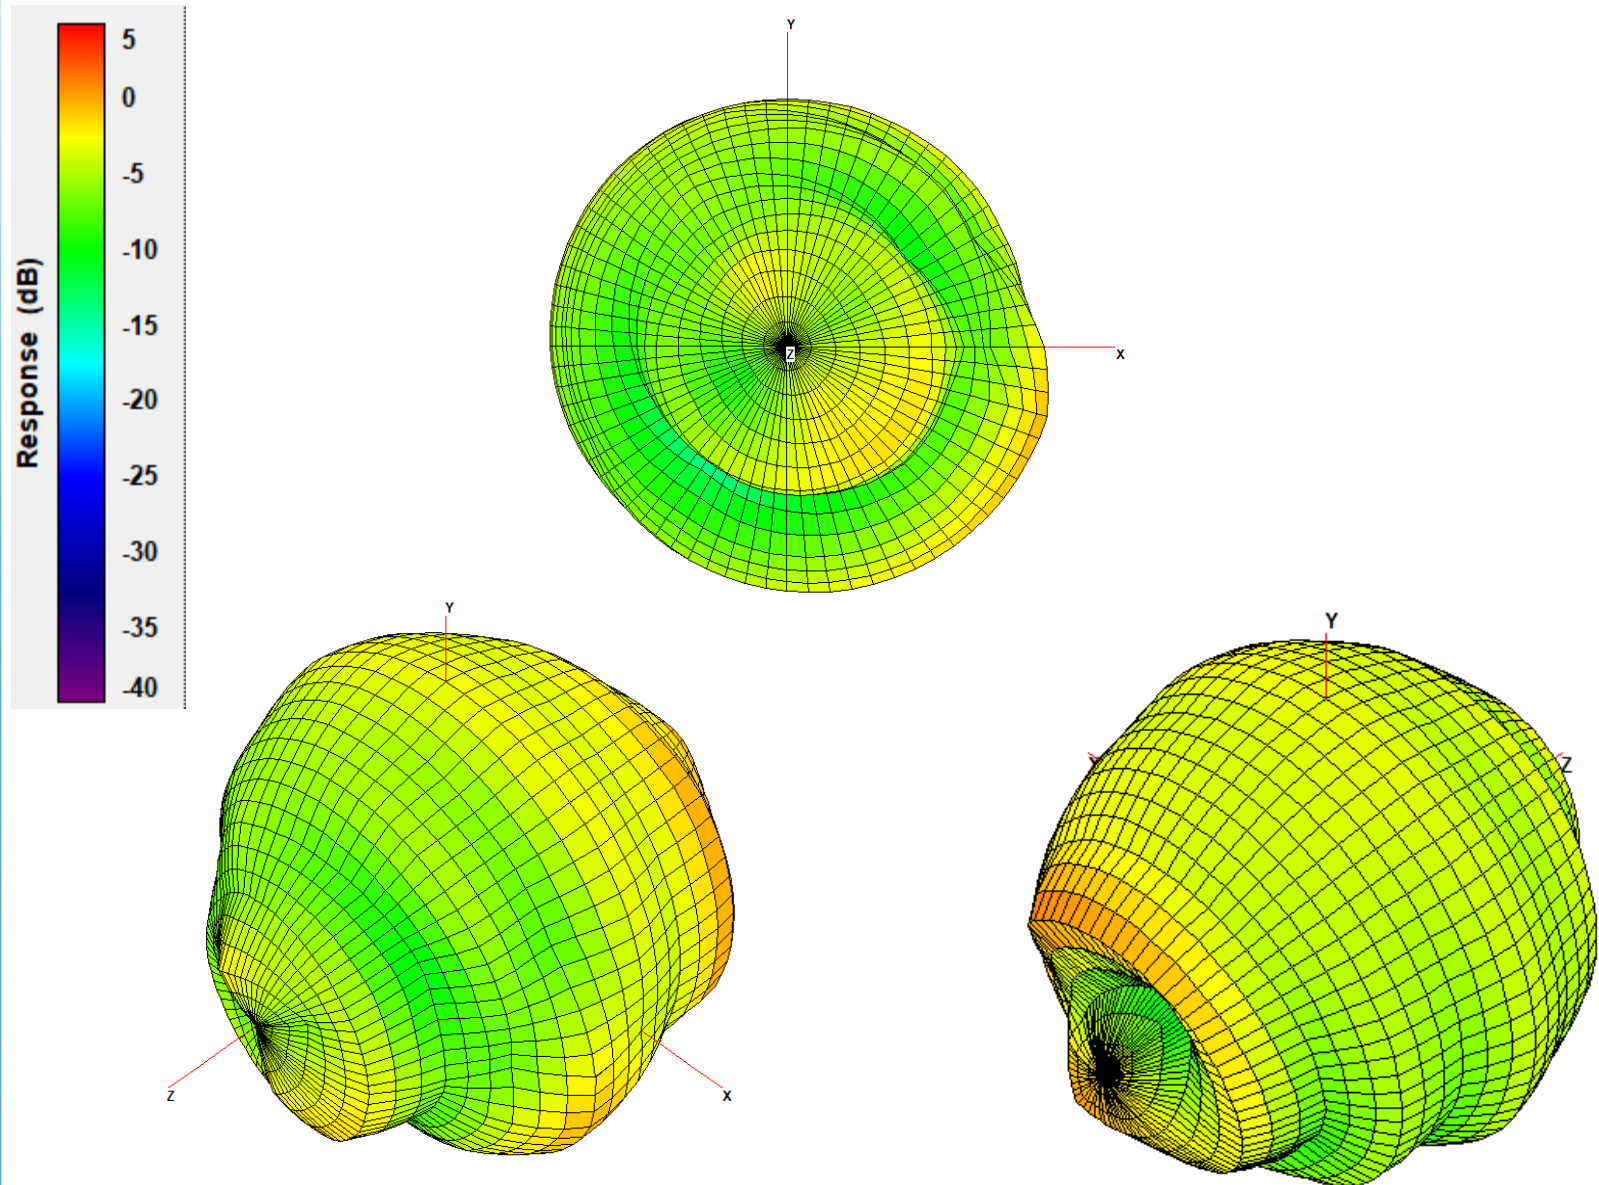

Peak Gain & Efficiency

Antenna Performance								
Freq. (MHz)	Ant-1 WiFi & BLE				Ant-2 ZigBee			
	Efficiency (%)	Directivity (dBi)	Avg Gain (dBi)	Peak Gain (dBi)	Efficiency (%)	Directivity (dBi)	Avg Gain (dBi)	Peak Gain (dBi)
2400	36.4	4.87	-4.38	-0.19	36.9	4.75	-4.32	0.42
2450	42.7	4.58	-3.68	0.89	42.1	4.53	-3.75	0.78
2500	46.8	5.10	-3.29	1.81	44.2	4.63	-3.53	1.10
5150	36.4	5.44	-4.38	1.05				
5500	38.1	6.85	-4.18	2.66				
5850	43.9	4.49	-3.57	0.91				

SERCOMM

www.sercomm.com