

ELECTROMAGNETIC EMISSION COMPLIANCE REPORT FOR LOW-POWER, NON-LICENSED TRANSMITTER

Test Report No. : W167R-D017
AGR No. : A154A-171
Applicant : Hanwha Corporation Asan 1 Plant
Address : Asanvalleynam-Ro 144, Dunpo-Myun, Asan-City, Chungnam, 31409, South Korea
Manufacturer : ROHAU
Address : BMR Center, 55 Hanyangdaehak-ro, Sangnok-gu, Ansan-si Kyeonggi-do, 426-791, Korea
Type of Equipment : Lever/Pedal Control Unit
FCC ID. : 2AGC5DJO-ALPC-DEF
Model Name : DJO-ALPC
Serial number : N/A
Total page of Report : 33 pages (including this page)
Date of Incoming : April 28, 2015
Date of issue : July 07, 2016

SUMMARY

The equipment complies with the regulation; **FCC PART 15 SUBPART C Section 15.247**

This test report only contains the result of a single test of the sample supplied for the examination.

It is not a generally valid assessment of the features of the respective products of the mass-production.

Reviewed by: 
 Ki-Hong, Nam / Asst, Chief Engineer
 ONETECH Corp.

Approved by: 
 Sung-Ik, Han/ Managing Director
 ONETECH Corp.

CONTENTS

PAGE

1. VERIFICATION OF COMPLIANCE	5
2. TEST SUMMARY	6
2.1 TEST ITEMS AND RESULTS	6
2.2 ADDITIONS, DEVIATIONS, EXCLUSIONS FROM STANDARDS.....	6
2.3 RELATED SUBMITTAL(S) / GRANT(S)	6
2.4 PURPOSE OF THE TEST	6
2.5 TEST METHODOLOGY.....	6
2.6 TEST FACILITY.....	6
3. GENERAL INFORMATION.....	7
3.1 PRODUCT DESCRIPTION.....	7
3.2 ALTERNATIVE TYPE(S)/MODEL(S); ALSO COVERED BY THIS TEST REPORT.....	7
4. EUT MODIFICATIONS.....	7
5. SYSTEM TEST CONFIGURATION	8
5.1 JUSTIFICATION.....	8
5.2 PERIPHERAL EQUIPMENT	8
5.3 MODE OF OPERATION DURING THE TEST	8
5.4 CONFIGURATION OF TEST SYSTEM.....	9
5.5 ANTENNA REQUIREMENT	9
6. PRELIMINARY TEST	10
6.1 AC POWER LINE CONDUCTED EMISSIONS TESTS.....	10
6.2 GENERAL RADIATED EMISSIONS TESTS	10
7. MINIMUM 6 DB BANDWIDTH	11
7.1 OPERATING ENVIRONMENT	11
7.2 TEST SET-UP	11
7.3 TEST EQUIPMENT USED.....	11
7.4 TEST DATA.....	12
8. MAXIMUM PEAK OUTPUT POWER.....	14
8.1 OPERATING ENVIRONMENT	14
8.2 TEST SET-UP	14
8.3 TEST EQUIPMENT USED.....	14
8.4 TEST DATA.....	15

9. 100 KHZ BANDWIDTH OUTSIDE THE FREQUENCY BAND.....	17
9.1 OPERATING ENVIRONMENT	17
9.2 TEST SET-UP FOR CONDUCTED MEASUREMENT	17
9.3 TEST SET-UP FOR RADIATED MEASUREMENT.....	17
9.4 TEST EQUIPMENT USED	17
9.5 TEST DATA FOR CONDUCTED EMISSION	18
<i>9.5.1 Test data</i>	<i>18</i>
<i>9.6 Test data for radiated emission</i>	<i>23</i>
<i>9.6.1 Radiated Emission which fall in the Restricted Band.....</i>	<i>23</i>
<i>9.6.2 Spurious & Harmonic Radiated Emission.....</i>	<i>24</i>
10. PEAK POWER SPECTRUL DENSITY	25
10.1 OPERATING ENVIRONMENT	25
10.2 TEST SET-UP	25
10.3 TEST EQUIPMENT USED	25
10.4 TEST DATA.....	26
11. RADIATED EMISSION TEST	28
11.1 OPERATING ENVIRONMENT	28
11.2 TEST SET-UP	28
11.3 TEST EQUIPMENT USED	28
11.4 TEST DATA.....	29
<i>11.4.1 Test data for Below 30 MHz</i>	<i>29</i>
<i>11.4.2 Test data for 30 MHz ~ 1 000 MHz.....</i>	<i>30</i>
<i>11.4.3 Test data for above 1 GHz</i>	<i>33</i>

Revision History

Issued Report No.	Issued Date	Revisions	Effect Section
W167R-D017	July 07, 2016	Initial Issue	All

1. VERIFICATION OF COMPLIANCE

Applicant : Hanwha Corporation Asan 1 Plant
 Address : Asanvalleynam-Ro 144, Dunpo-Myun, Asan-City, Chungnam, 31409, South Korea
 Contact Person : SOYOUNG PARK / Assistant RESEARCH ENGINEER
 Telephone No. : +82-41-538-7886
 FCC ID : 2AGC5DJO-ALPC-DEF
 Model Name : DJO-ALPC
 Brand Name : -
 Serial Number : N/A
 Date : July 07, 2016

EQUIPMENT CLASS	<i>DTS – DIGITAL TRNSMISSION SYSTEM</i>
E.U.T. DESCRIPTION	Lever/Pedal Control Unit
THIS REPORT CONCERNS	Original Grant
MEASUREMENT PROCEDURES	ANSI C63.10:2013
TYPE OF EQUIPMENT TESTED	Pre-Production
KIND OF EQUIPMENT AUTHORIZATION REQUESTED	Certification
EQUIPMENT WILL BE OPERATED UNDER FCC RULES PART(S)	FCC PART 15 SUBPART C Section 15.247
MODIFICATIONS ON THE EQUIPMENT TO ACHIEVE COMPLIANCE	None
FINAL TEST WAS CONDUCTED ON	3 m, Semi Anechoic Chamber

-. The above equipment was tested by ONETECH Corp. for compliance with the requirement set forth in the FCC Rules and Regulations. This said equipment in the configuration described in this report, shows the maximum emission levels emanating from equipment are within the compliance requirements.

2. TEST SUMMARY

2.1 Test items and results

SECTION	TEST ITEMS	RESULTS
15.247 (a) (2)	Minimum 6 dB Bandwidth	Met the Limit / PASS
15.247 (b) (3)	Maximum Peak Conducted Output Power	Met the Limit / PASS
15.247 (d)	100 kHz Bandwidth Outside the Frequency Band	Met the Limit / PASS
15.247 (d)	Radiated Emission which fall in the Restricted Band	Met the Limit / PASS
15.247 (e)	Peak Power Spectral Density	Met the Limit / PASS
15.209	Radiated Emission Limits	Met the Limit / PASS
15.207	Conducted Limits	N/A (See Note)
15.203	Antenna Requirement	Met requirement / PASS

Note: This test is not performed because the EUT is operated by DC battery.

2.2 Additions, deviations, exclusions from standards

No additions, deviations or exclusions have been made from standard.

2.3 Related Submittal(s) / Grant(s)

Original submittal only

2.4 Purpose of the test

To determine whether the equipment under test fulfills the requirements of the regulation stated in section 2.1.

2.5 Test Methodology

Both conducted and radiated testing was performed according to the procedures in ANSI C63.10: 2013. Radiated testing was performed at a distance of 3 m from EUT to the antenna.

2.6 Test Facility

The Onetech Corp. has been designated to perform equipment testing in compliance with ISO/IEC 17025.

The Electromagnetic compatibility measurement facilities are located at 43-14, Jinsaegol-gil, Chowol-eup, Gwangju-si, Gyeonggi-do, 12735, Korea

-. Site Filing:

VCCI (Voluntary Control Council for Interference) – Registration No. R-4112/ C-4617/ G-666/ T-1842

IC (Industry Canada) – Registration No. Site# 3736-3

-. Site Accreditation:

KOLAS (Korea Laboratory Accreditation Scheme) - Accreditation NO. KT085

FCC (Federal Communications Commission) - Accreditation No. KR0013

RRA (Radio Research Agency) – Designation No. KR0013

3. GENERAL INFORMATION

3.1 Product Description

The Hanwha Corporation Asan 1 Plant, Model DJO-ALPC (referred to as the EUT in this report) is a Lever/Pedal Control Unit. Product specification information described herein was obtained from product data sheet or user's manual.

DEVICE TYPE	Portable Device
FREQUENCY RANGE	2 405 MHz ~ 2 480 MHz
NUMBER OF CHANNEL	16 Channels
MAX. RF OUTPUT POWER	-11.69 dBm
ANTENNA TYPE	Dipole Antenna
ANTENNA GAIN	5.78 dBi
MODULATION METHOD	O-QPSK
USED RF CHIP	Marker: TEXAS INSTRUMENTS Model Name: CC2530F32RHA
List of each Osc. or crystal Freq.(Freq. >= 1 MHz)	32 MHz
POWER REQUIREMENT	DC 24 V
EXTERNAL CONNECTOR	-

3.2 Alternative type(s)/model(s); also covered by this test report.

-. None

4. EUT MODIFICATIONS

-. None

5. SYSTEM TEST CONFIGURATION

5.1 Justification

This device was configured for testing in a typical way as a normal customer is supposed to be used. During the test, the following components were installed inside of the EUT.

DEVICE TYPE	MANUFACTURER	MODEL/PART NUMBER	FCC ID
Main Board	ROHAU	Main Board R2.0	N/A
Sub Board	ROHAU	N/A	N/A
Zigbee Module Board	TEXAS INSTRUMENTS	N/A	N/A

5.2 Peripheral equipment

Defined as equipment needed for correct operation of the EUT, but not considered as tested:

Model	Manufacturer	Description	Connected to
DJO-ALPC	ROHAU	Lever/Pedal Control Unit (EUT)	Key Box, Main Controller
Key Box	ROHAU	Key Box	EUT
Main Controller	ROHAU	Main Controller	EUT, Lever Controller Unit, Pedal Controller Unit, Battery
Lever Controller Unit	ROHAU	Lever Controller	Main Controller
Pedal Controller Unit	ROHAU	Pedal Controller	Main Controller
Battery	N/A	Battery	Main Controller

5.3 Mode of operation during the test

For the testing, software used to control the EUT for staying in continuous transmitting mode is programmed.

-. The EUT was set at Low Channel (2 405 MHz), Middle Channel (2 440 MHz), and High Channel (2 480 MHz).

To get a maximum radiated emission levels from the EUT

5.4 Configuration of Test System

Line Conducted Test: It is not need to test this requirement, because the EUT shall be operated by DC battery.

Radiated Emission Test: Preliminary radiated emissions test were conducted using the procedure in ANSI C63.10: 2013 to determine the worse operating conditions. Final radiated emission tests were conducted at 3 m open area test site.

The turntable was rotated through 360 degrees and the EUT was tested by positioned three orthogonal planes to obtain the highest reading on the field strength meter. Once maximum reading was determined, the search antenna was raised and lowered in both vertical and horizontal polarization.

5.5 Antenna Requirement

For intentional device, according to section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

Antenna Construction:

The antenna of the EUT is a Dipole Antenna with u.fl end connector on the main board in the EUT, so no consideration of replacement by the user.

6. PRELIMINARY TEST

6.1 AC Power line Conducted Emissions Tests

During Preliminary Tests, the following operating mode was investigated

Operation Mode	The Worse operating condition (Please check one only)
It is not need to test this requirement, because the power of the EUT is supplied by battery.	

6.2 General Radiated Emissions Tests

During Preliminary Tests, the following operating modes were investigated

Operation Mode	The Worse operating condition (Please check one only)
Transmitting Mode	X


7. MINIMUM 6 dB BANDWIDTH

7.1 Operating environment

Temperature : 24.2 °C
Relative humidity : 45.0 % R.H.

7.2 Test set-up

The antenna output of the EUT was connected to the spectrum analyzer. The resolution bandwidth is set to 100 kHz, and peak detection was used. The 6 dB bandwidth is defined as the total spectrum over which the power is higher than the peak power minus 6 dB.

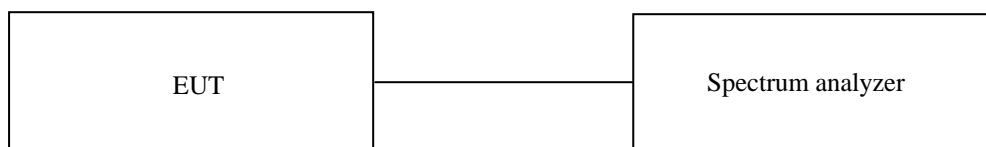

7.3 Test equipment used

Model Number	Manufacturer	Description	Serial Number	Last Cal.
■ - FSV40	Rohde & Schwarz	Signal Analyzer	101009	May 31, 2016 (1Y)

All test equipment used is calibrated on a regular basis.

7.4 Test data

-. Test Date : June 15, 2016


-. Test Result : Pass


CHANNEL	FREQUENCY(MHz)	MEASURED VALUE (MHz)	LIMIT (MHz)	MARGIN (MHz)
Low	2 405	1.61	0.50	1.11
Middle	2 440	1.59	0.50	1.09
High	2 480	1.60	0.50	1.10

Remark. Margin = Measured Value - Limit




Tested by: Tae-Ho, Kim / Senior Engineer

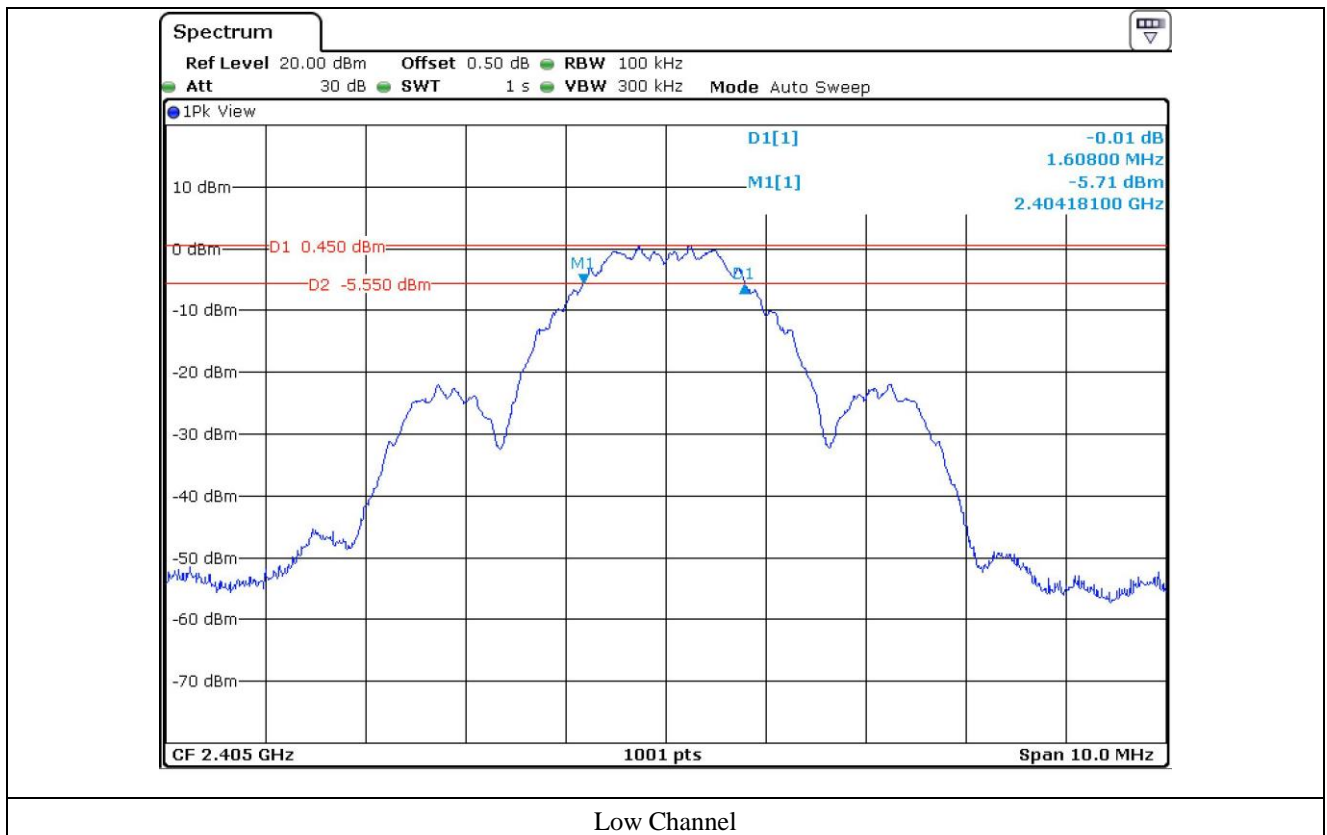

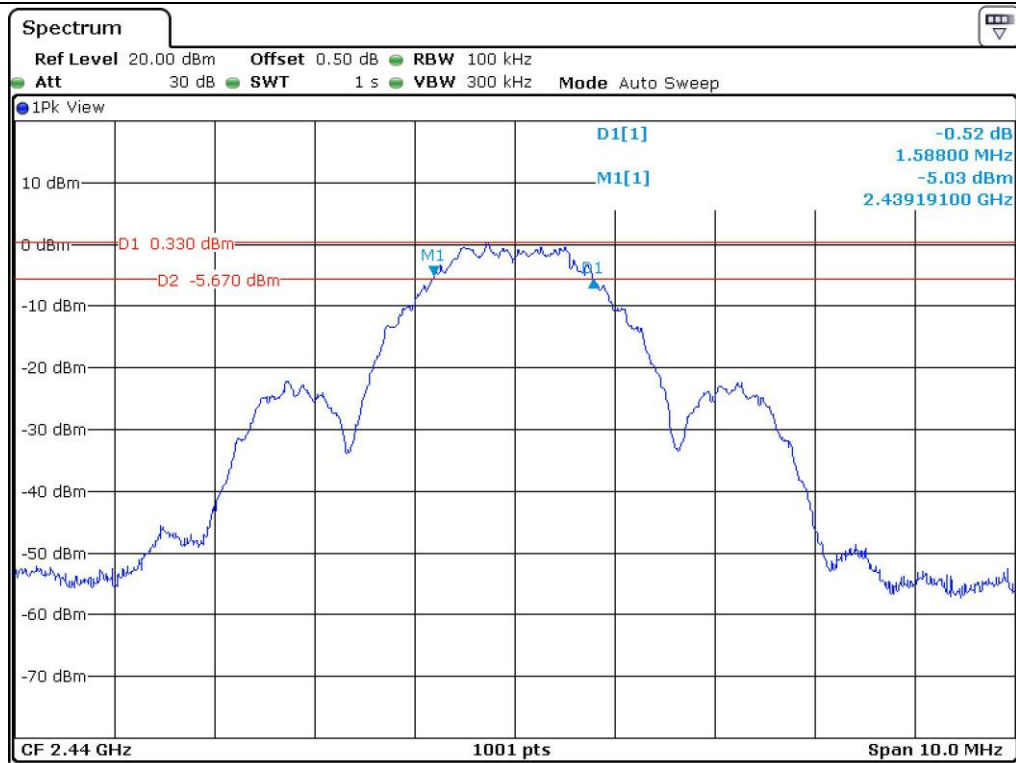

Middle Channel

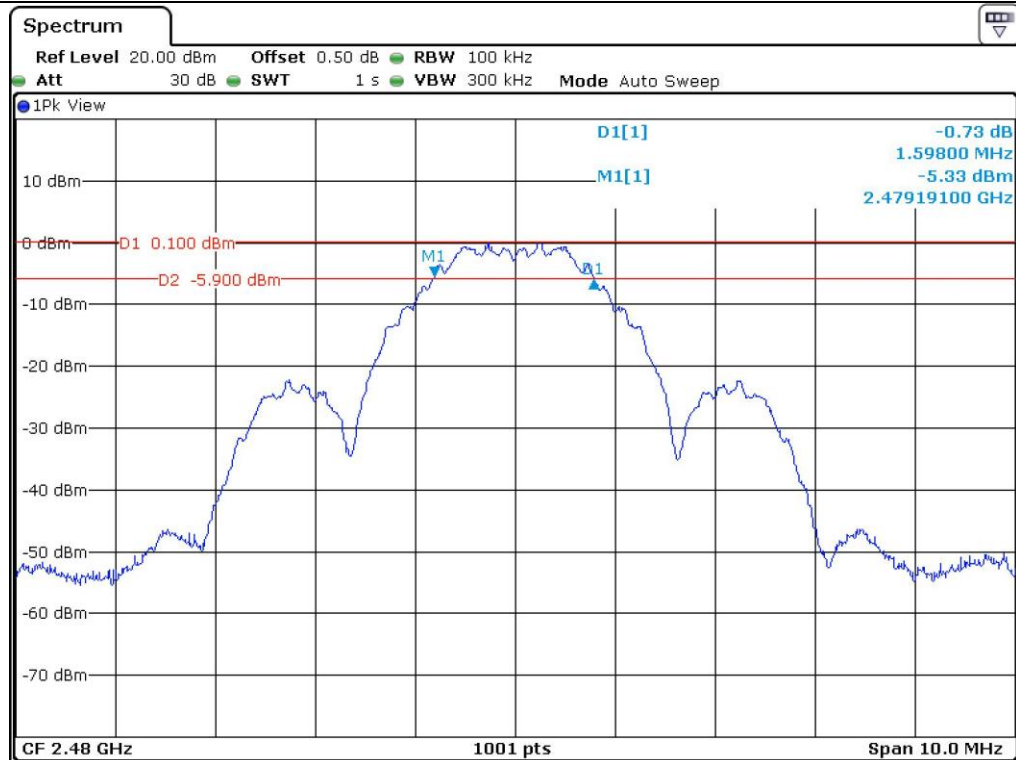

High Channel


8. MAXIMUM PEAK OUTPUT POWER

8.1 Operating environment

Temperature : 24.2 °C
Relative humidity : 45.0 % R.H.

8.2 Test set-up

The maximum peak output power was measured with the spectrum analyzer connected to the antenna output of the EUT.
The EUT was operating in transmit mode at the appropriate center frequency.

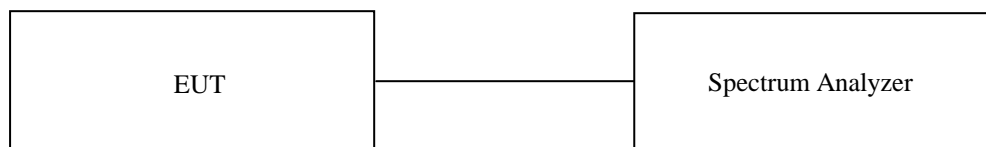

8.3 Test equipment used

Model Number	Manufacturer	Description	Serial Number	Last Cal.
■ - FSV40	Rohde & Schwarz	Signal Analyzer	101009	May 31, 2016 (1Y)

All test equipment used is calibrated on a regular basis.

8.4 Test data

-. Test Date : June 14, 2016


-. Test Result : Pass


CHANNEL	FREQUENCY (MHz)	DTS (MHz)	MEASURED VLAUE (dBm)	LIMIT (dBm)	MARGIN (dB)
LOW	2 405	1.61	-11.69	30.00	41.69
MIDDLE	2 440	1.59	-12.16	30.00	42.16
HIGH	2 480	1.60	-12.12	30.00	42.12

Remark. Margin = Limit – Measured Value (=Receiver Reading + Cable Loss)




Tested by: Tae-Ho, Kim / Senior Engineer

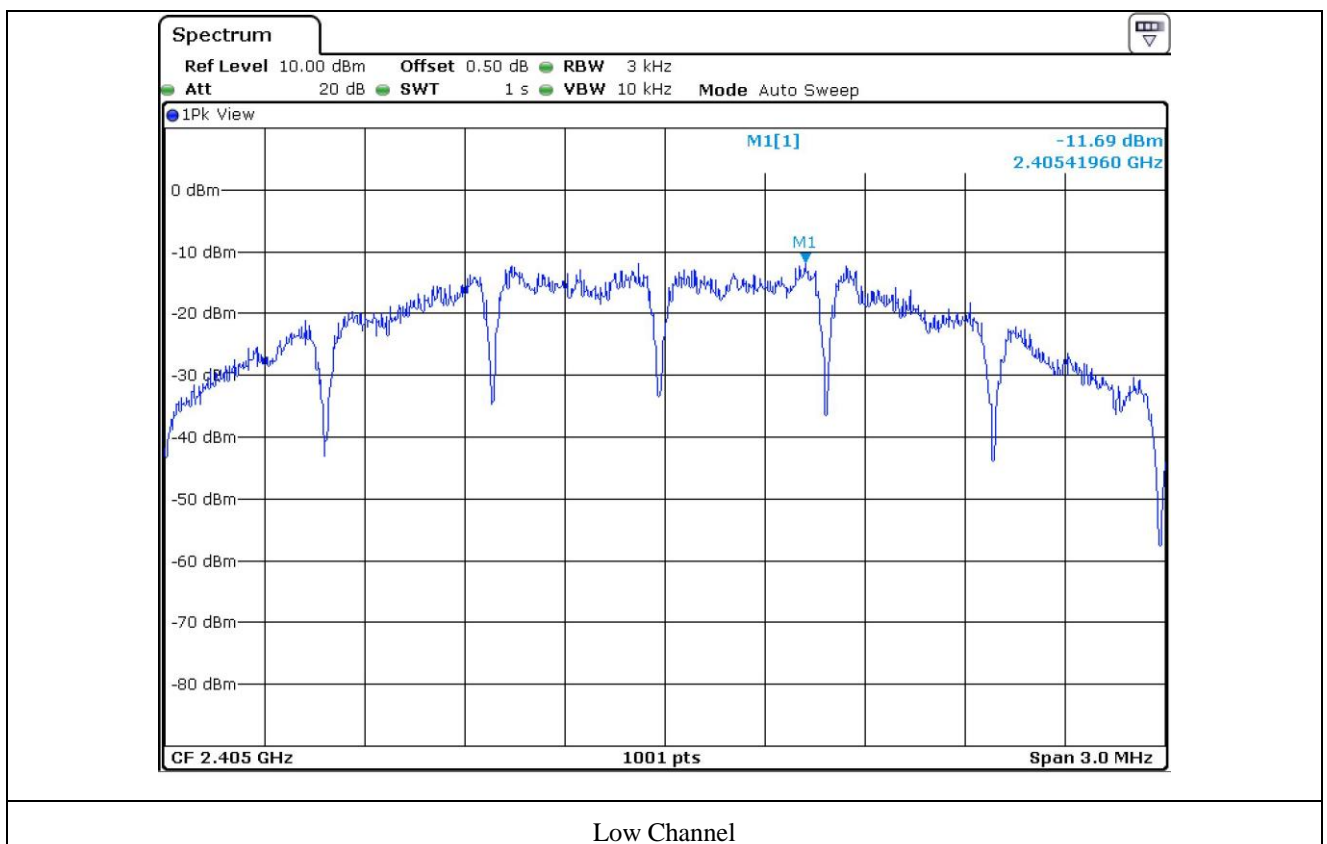

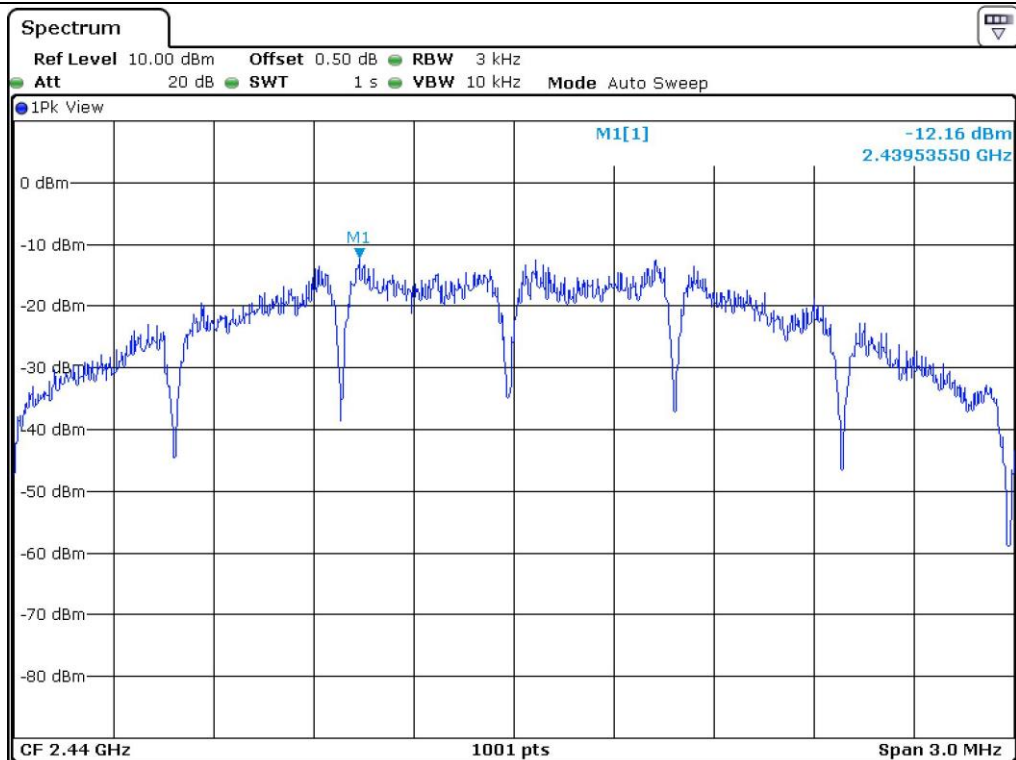

Middle Channel

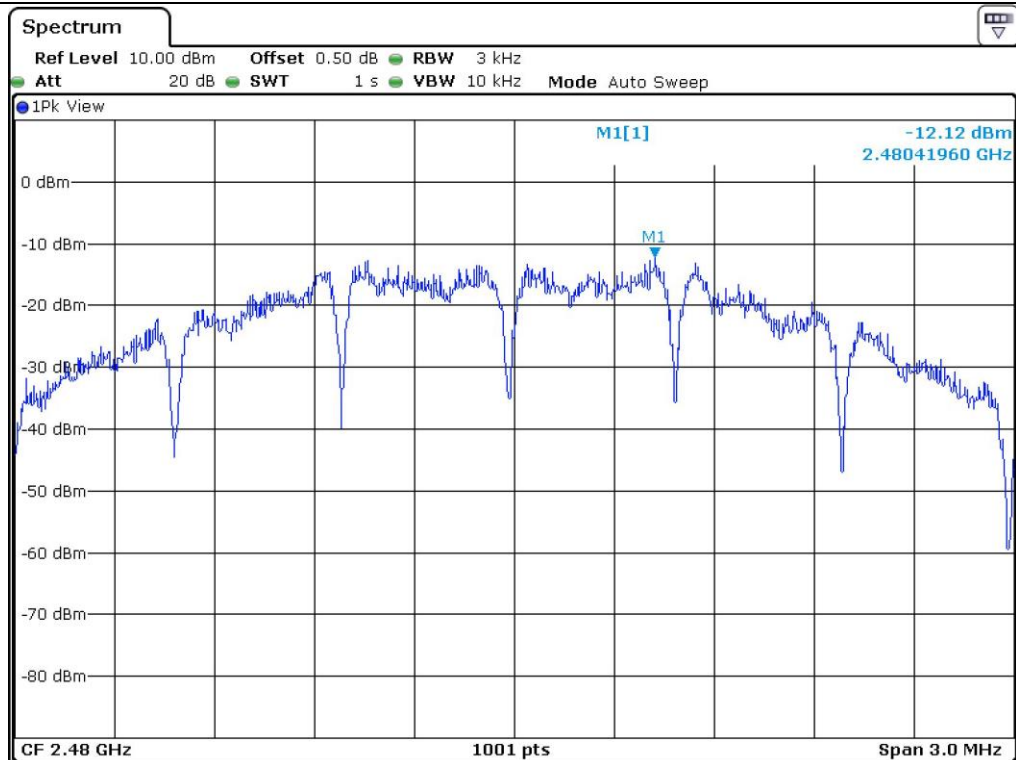

High Channel


9. 100 kHz BANDWIDTH OUTSIDE THE FREQUENCY BAND

9.1 Operating environment

Temperature : 24.2 °C
Relative humidity : 45.0 % R.H.

9.2 Test set-up for conducted measurement

The antenna output of the EUT was connected to the spectrum analyzer. The resolution and video bandwidth is set to 100 kHz, and peak detection was used.

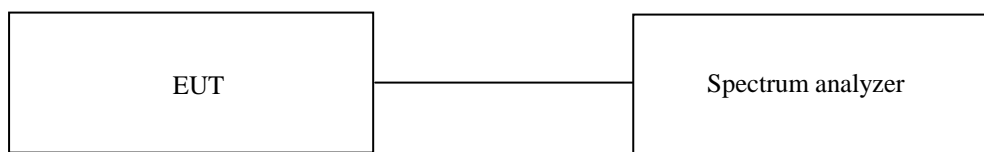

9.3 Test set-up for radiated measurement

The radiated emissions measurements were performed on the 3 m semi anechoic chamber. The EUT was placed on a non-conductive turntable approximately 0.8 m above the ground plane. The frequency spectrum from 30 MHz to 26.5 GHz was scanned and maximum emission levels at each frequency recorded. The system was rotated 360°, and the antenna was varied in the height between 1.0 m and 4.0 m in order to determine the maximum emission levels. This procedure was performed for horizontal and vertical polarization of the receiving antenna.


9.4 Test equipment used


	Model Number	Manufacturer	Description	Serial Number	Last Cal.(Interval)
■ -	FSV40	Rohde & Schwarz	Signal Analyzer	101009	May 31, 2016 (1Y)
■ -	ESU	Rohde & Schwarz	EMI Test Receiver	100261	Apr. 29, 2016 (1Y)
■ -	310N	Sonoma Instrument	Pre-Amplifier	312544	Apr. 05, 2016 (1Y)
■ -	SCU-18	Rohde & Schwarz	Pre-Amplifier	10041	Nov. 23, 2015 (1Y)
■ -	DT3000	Innco System	Turn Table	930611	N/A
■ -	MA4000-EP	Innco System	Antenna Master	3320611	N/A
■ -	VULB9163	Schwarzbeck	TRILOG Broadband Antenna	9163-421	Apr. 15, 2016 (2Y)
■ -	BBHA9120D	Schwarzbeck	Horn Antenna	BBHA9120D295	Aug. 31, 2015 (2Y)
■ -	BBHA9170	Schwarzbeck	Horn Antenna	BBHA9170178	Apr. 31, 2015 (2Y)


All test equipment used is calibrated on a regular basis.

9.5 Test data for conducted emission


9.5.1 Test data

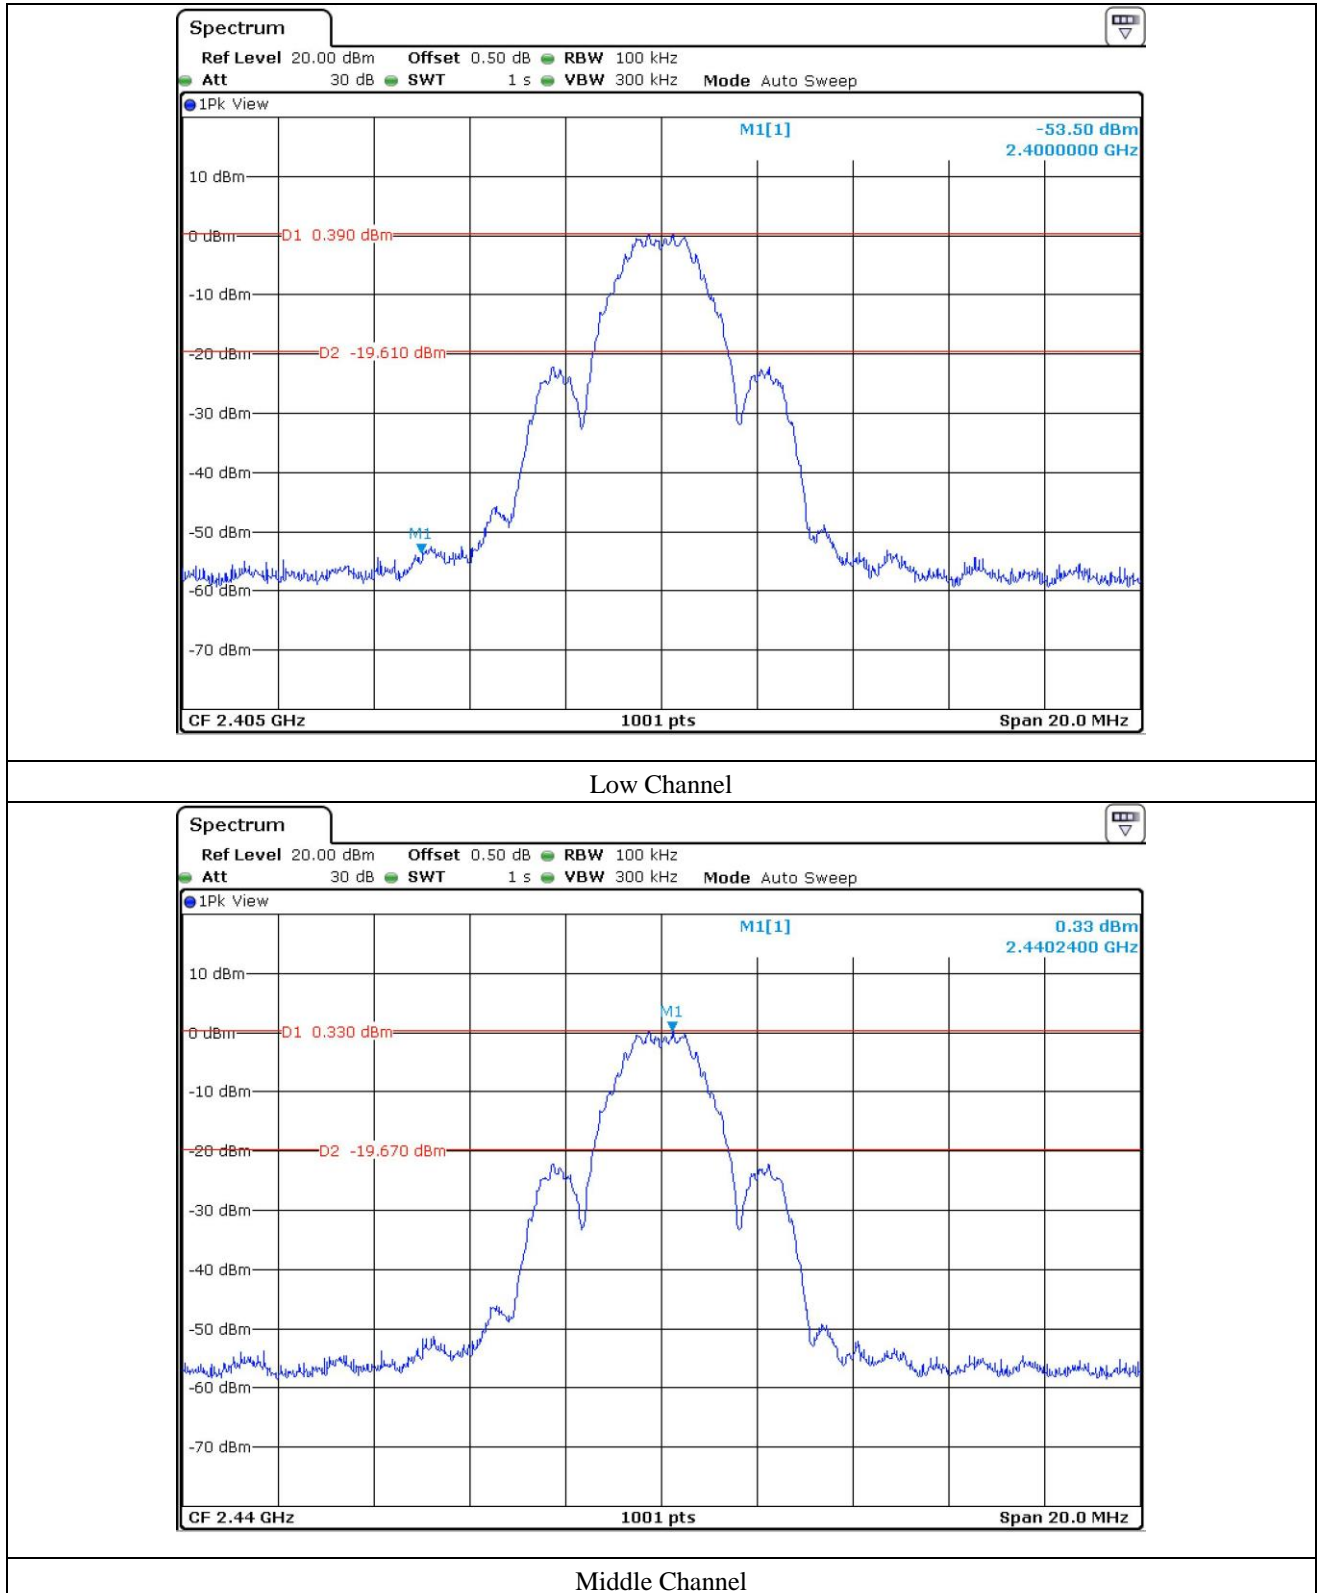

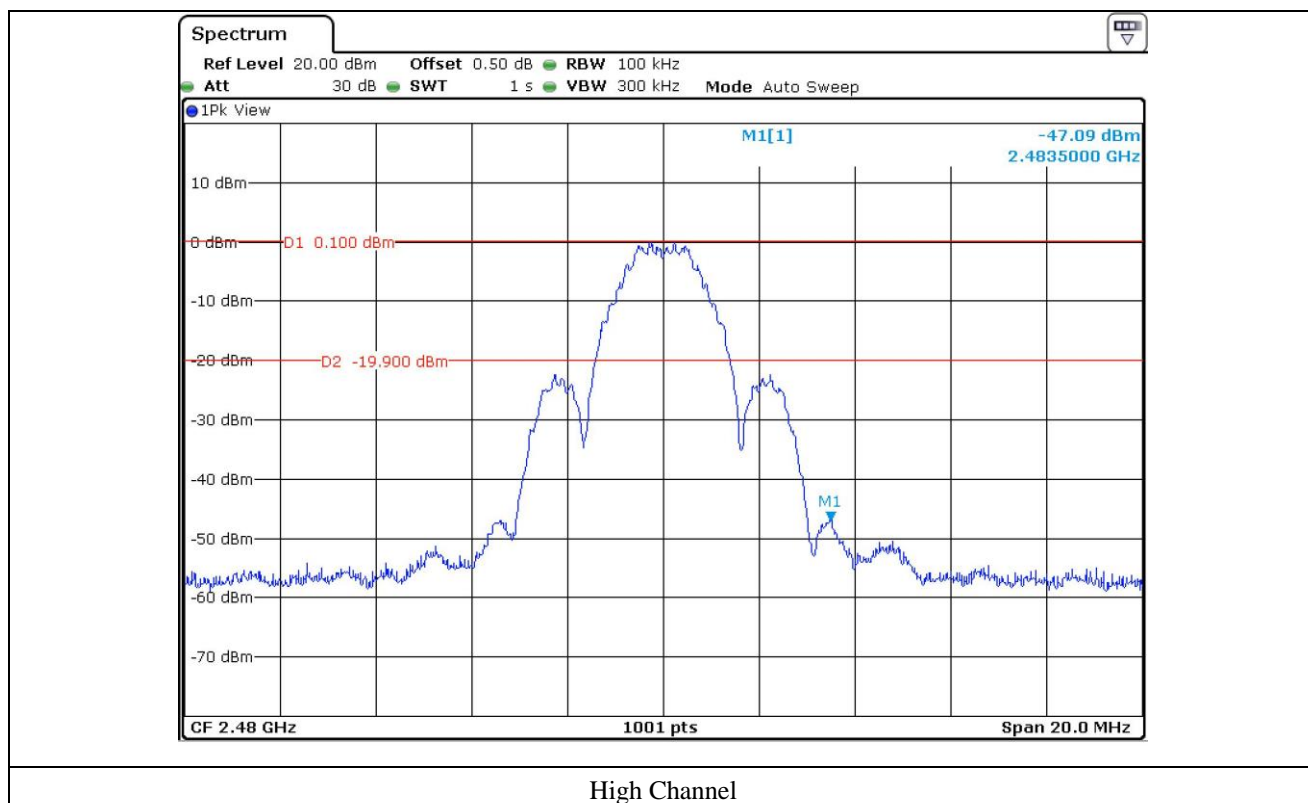


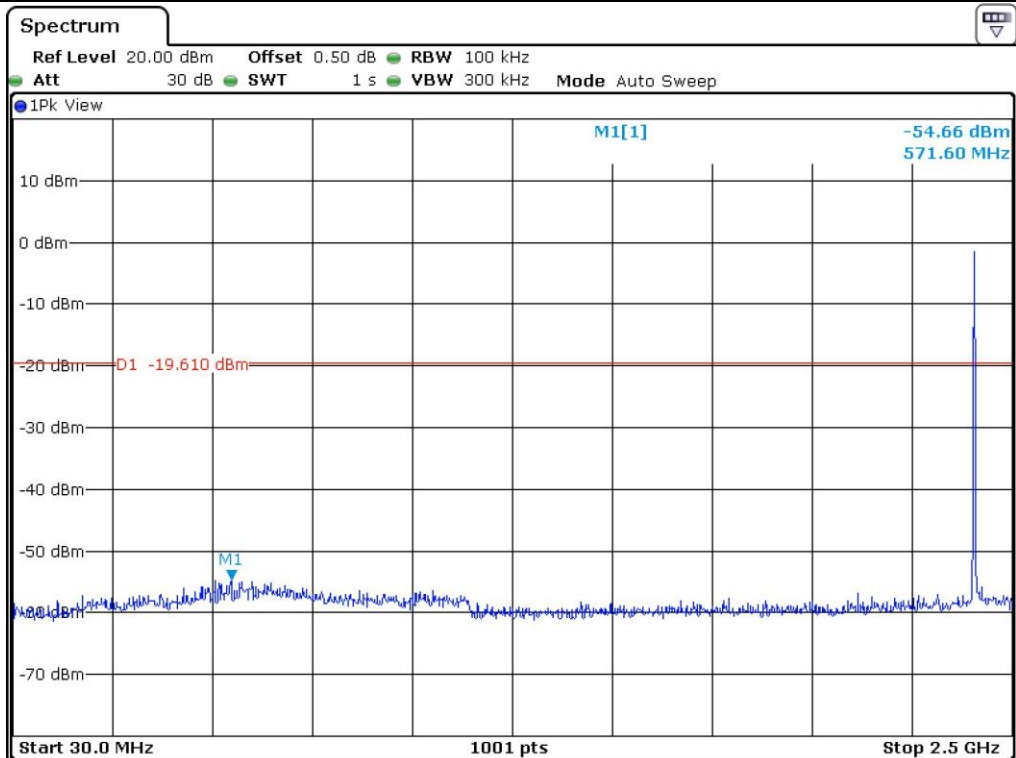


Low Channel

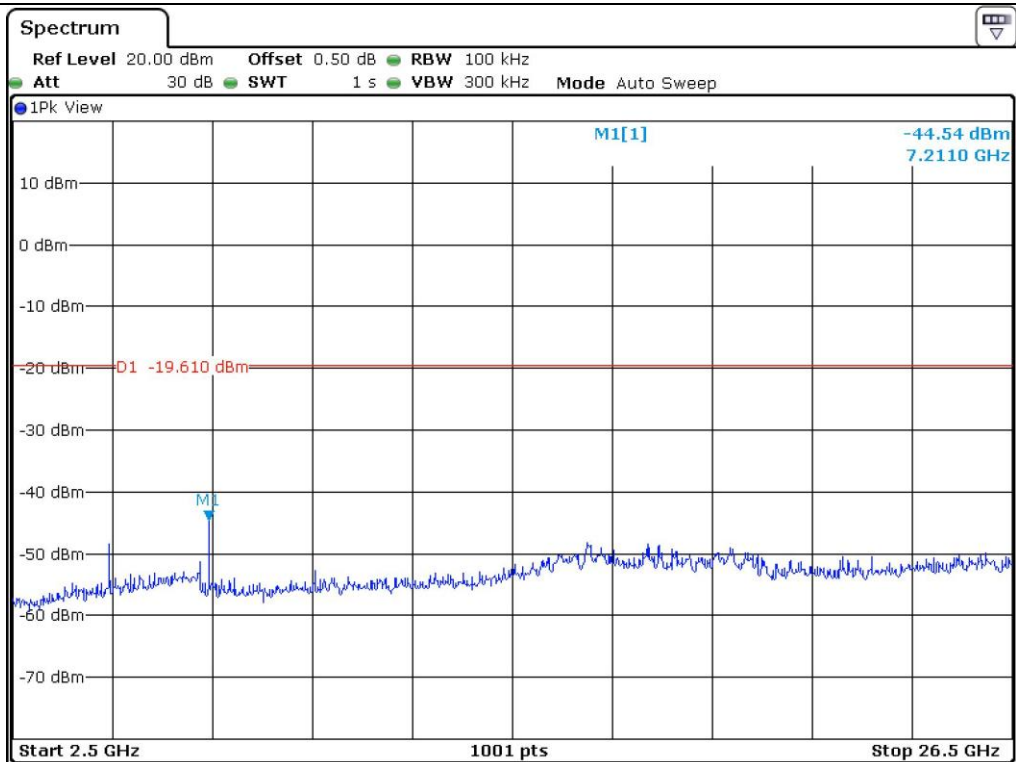


Low Channel

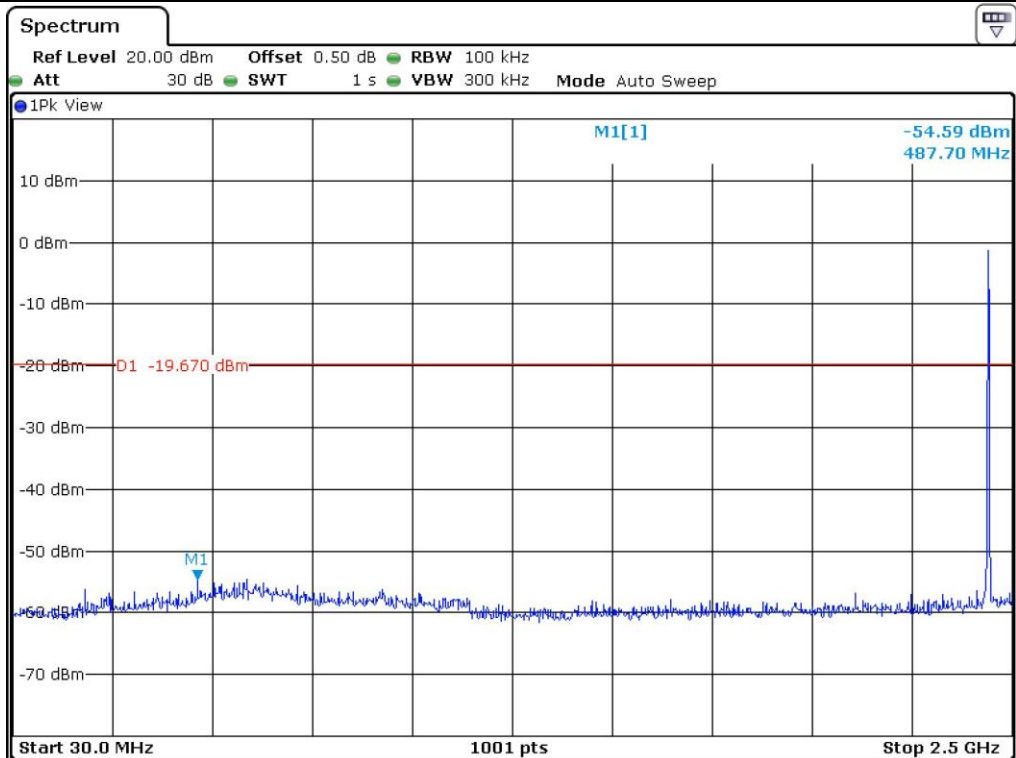


Middle Channel

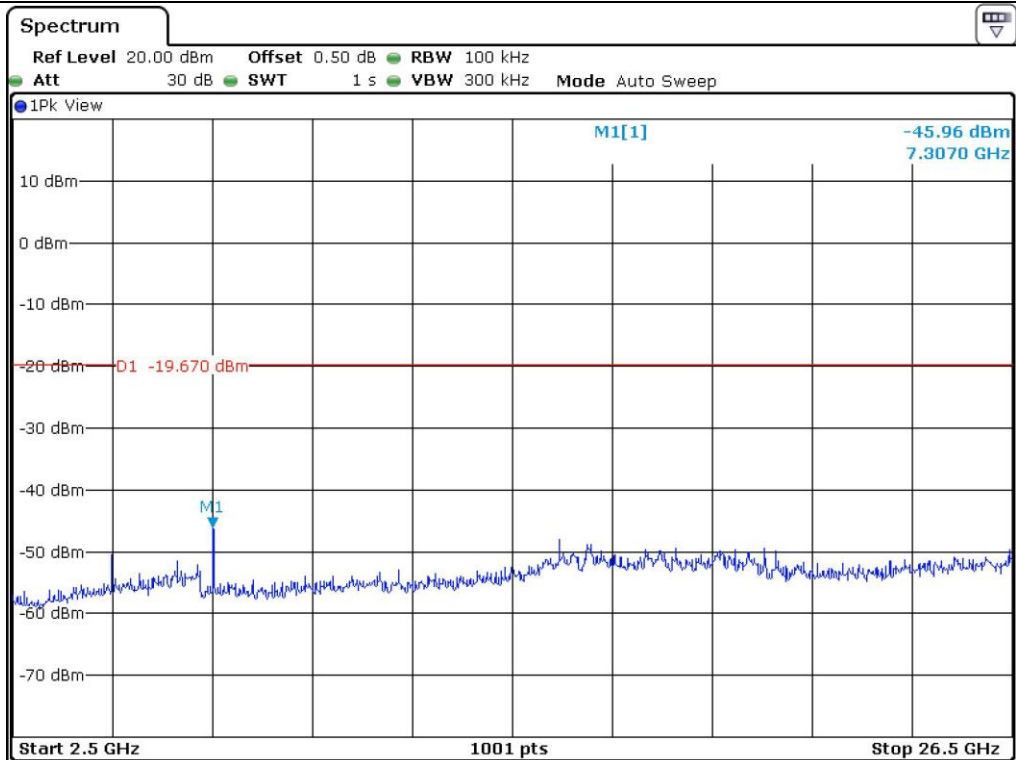

Middle Channel

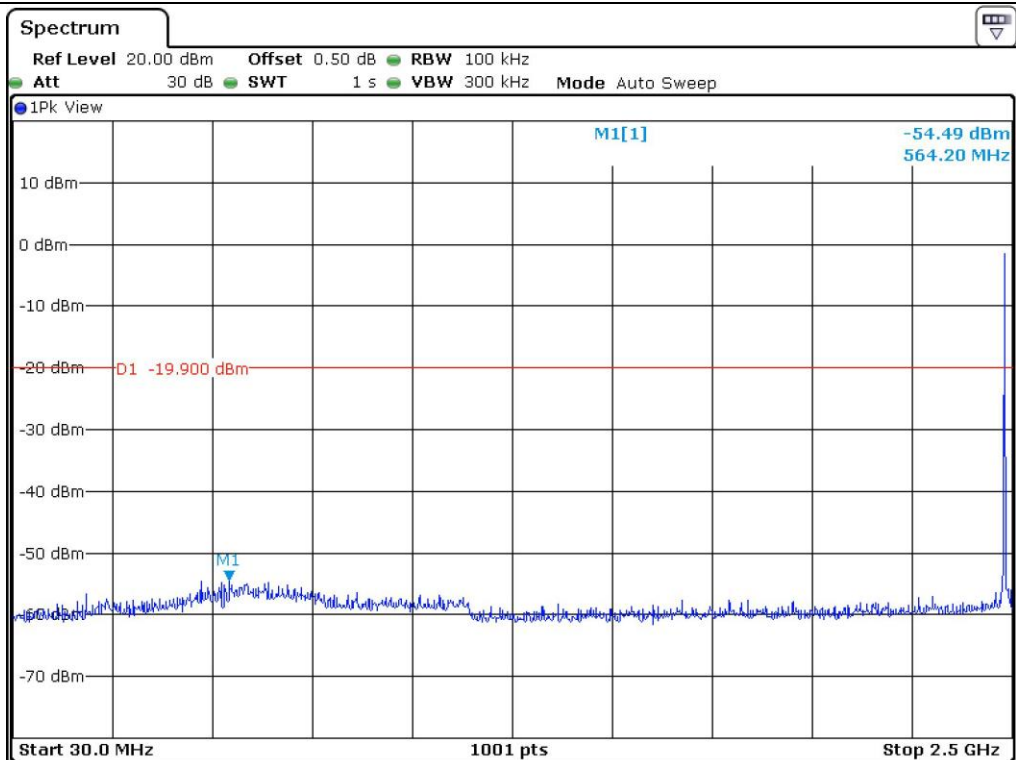

High Channel

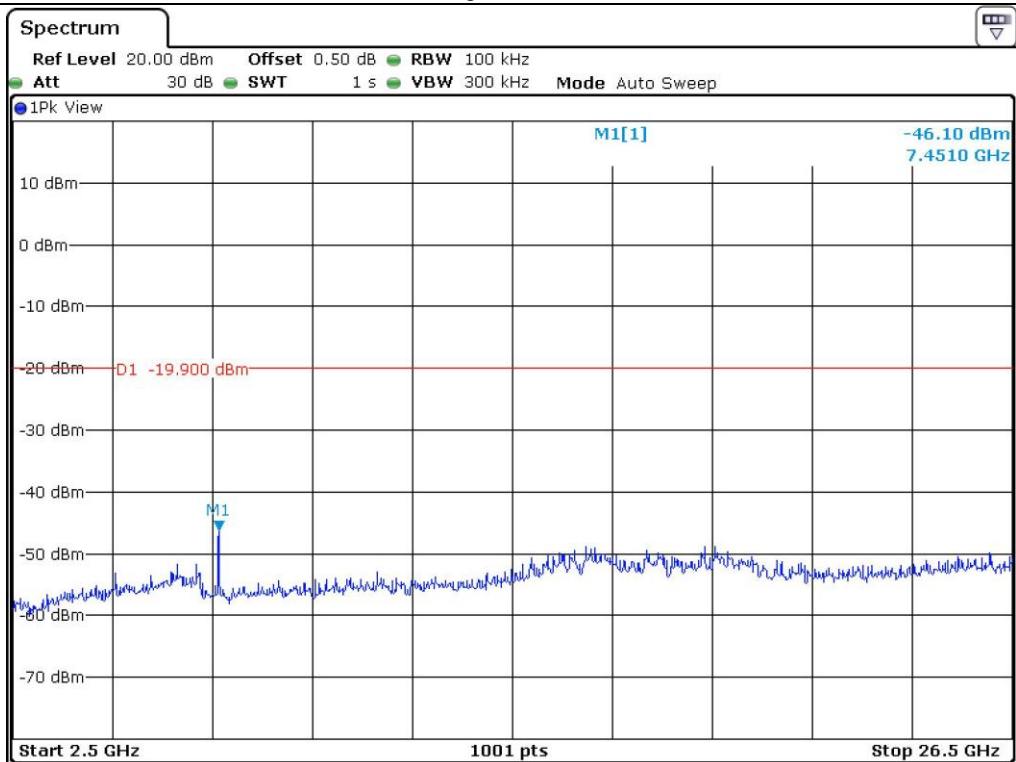

High Channel

9.6 Test data for radiated emission

9.6.1 Radiated Emission which fall in the Restricted Band

- . Test Date : June 17, 2016
- . Resolution bandwidth : 100 kHz for Peak and Average Mode at 30 MHz ~ 1 GHz
1 MHz for Peak and Average Mode at above 1 GHz
- . Video bandwidth : 100 kHz for Peak and Average Mode at 30 MHz ~ 1 GHz
1 MHz for Peak and 10 Hz for Average Mode at above 1 GHz
- . Frequency range : 30 MHz ~ 26.5 GHz
- . Measurement distance : 3 m
- . Result : PASSED

Frequency (MHz)	Reading (dBμV)	Detector Mode	Ant. Pol. (H/V)	Ant. Factor	Cable Loss	Amp Gain	Total (dBμV/m)	Limits (dBμV/m)	Margin (dB)
Test Data for Low Channel									
2 390.00	48.76	Peak	H	27.20	7.10	43.10	39.96	74.00	34.04
	39.18	Average	H				30.38	54.00	23.62
	49.02	Peak	V				40.22	74.00	33.78
	39.35	Average	V				30.55	54.00	23.45
Test Data for Low Channel									
2 400.00	64.77	Peak	H	27.20	7.10	43.10	55.97	74.00	18.03
	53.52	Average	H				44.72	54.00	9.28
	64.97	Peak	V				56.17	74.00	17.83
	53.68	Average	V				44.88	54.00	9.12
Test Data for High Channel									
2 483.50	48.61	Peak	H	27.40	7.10	43.10	40.01	74.00	33.99
	39.07	Average	H				30.47	54.00	23.53
	48.98	Peak	V				40.38	74.00	33.62
	39.24	Average	V				30.64	54.00	23.36

Tabulated test data for Restricted Band

Remark: "H": Horizontal, "V": Vertical

$$\text{Margin (dB)} = \text{Limits (dBμV/m)} - \text{Total Level (dBμV/m)}$$

$$\text{Total Level} = \text{Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Pre-Amplifier Gain}$$



Tested by: Tae-Ho, Kim / Senior Engineer

9.6.2 Spurious & Harmonic Radiated Emission

- Test Date : June 17, 2016
- Resolution bandwidth : 1 MHz for Peak and Average Mode for the emissions fall in restricted band,
100 kHz for Peak Mode for the emissions outside restricted band
- Video bandwidth : 1 MHz for Peak Mode, 10 Hz for Average Mode
- Frequency range : 1 GHz ~ 26.5 GHz
- Measurement distance : 3 m
- Result : PASSED

Frequency (GHz)	Reading (dBμV)	Detector Mode	Ant. Pol. (H/V)	Ant. Factor	Cable Loss	Amp Gain	Total (dBμV/m)	Limits (dBμV/m)	Margin (dB)
Test Data for Low Channel									
4 810.00	49.27	Peak	H	31.10	9.60	42.40	47.57	74.00	26.43
	37.52	Average	H				35.82	54.00	18.18
	48.79	Peak	V				47.09	74.00	26.91
	37.18	Average	V				35.48	54.00	18.52
Test Data for Middle Channel									
4 880.00	48.82	Peak	H	31.30	9.80	42.40	47.52	74.00	26.48
	37.29	Average	H				35.99	54.00	18.01
	48.56	Peak	V				47.26	74.00	26.74
	36.82	Average	V				35.52	54.00	18.48
Test Data for High Channel									
4 960.00	48.56	Peak	H	31.30	9.90	42.30	47.46	74.00	26.54
	36.91	Average	H				35.81	54.00	18.19
	48.27	Peak	V				47.17	74.00	26.83
	36.66	Average	V				35.56	54.00	18.44

Tabulated test data for Restricted Band

Remark: "H": Horizontal, "V": Vertical

Margin (dB) = Limits (dBμV/m) - Total Level (dBμV/m)

Total Level = Reading + Antenna Factor + Cable Loss – Pre-Amplifier Gain



Tested by: Tae-Ho, Kim / Senior Engineer


10. PEAK POWER SPECTRUL DENSITY

10.1 Operating environment

Temperature : 24.2 °C
Relative humidity : 45.0 % R.H.

10.2 Test set-up

The antenna output of the EUT was connected to the spectrum analyzer. The resolution bandwidth is set to 3 kHz, the video bandwidth is set to 3 times the resolution bandwidth. The maximum level form the EUT in 3 kHz bandwidth was measured with above condition.

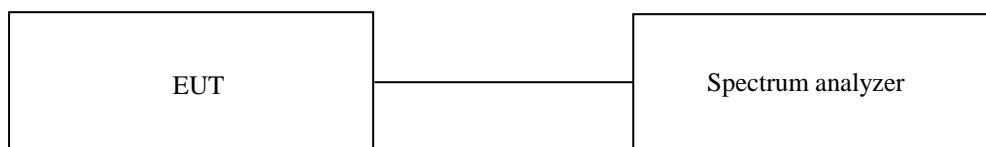

10.3 Test equipment used

	Model Number	Manufacturer	Description	Serial Number	Last Cal.(Interval)
■ -	FSV40	Rohde & Schwarz	Signal Analyzer	101009	May 31, 2016 (1Y)

All test equipment used is calibrated on a regular basis.

10.4 Test data

-. Test Date : June 10, 2016

-. Test Result : Pass


-. Operating Condition : Continuous transmitting mode


CHANNEL	FREQUENCY(MHz)	MEASURED VLAUE (dBm)	LIMIT (dBm)	MARGIN (dB)
Low	2 405	4.01	8.00	3.99
Middle	2 440	3.88	8.00	4.12
High	2 480	3.66	8.00	4.34

Remark. Margin = Limit – Measured value




Tested by: Tae-Ho, Kim / Senior Engineer

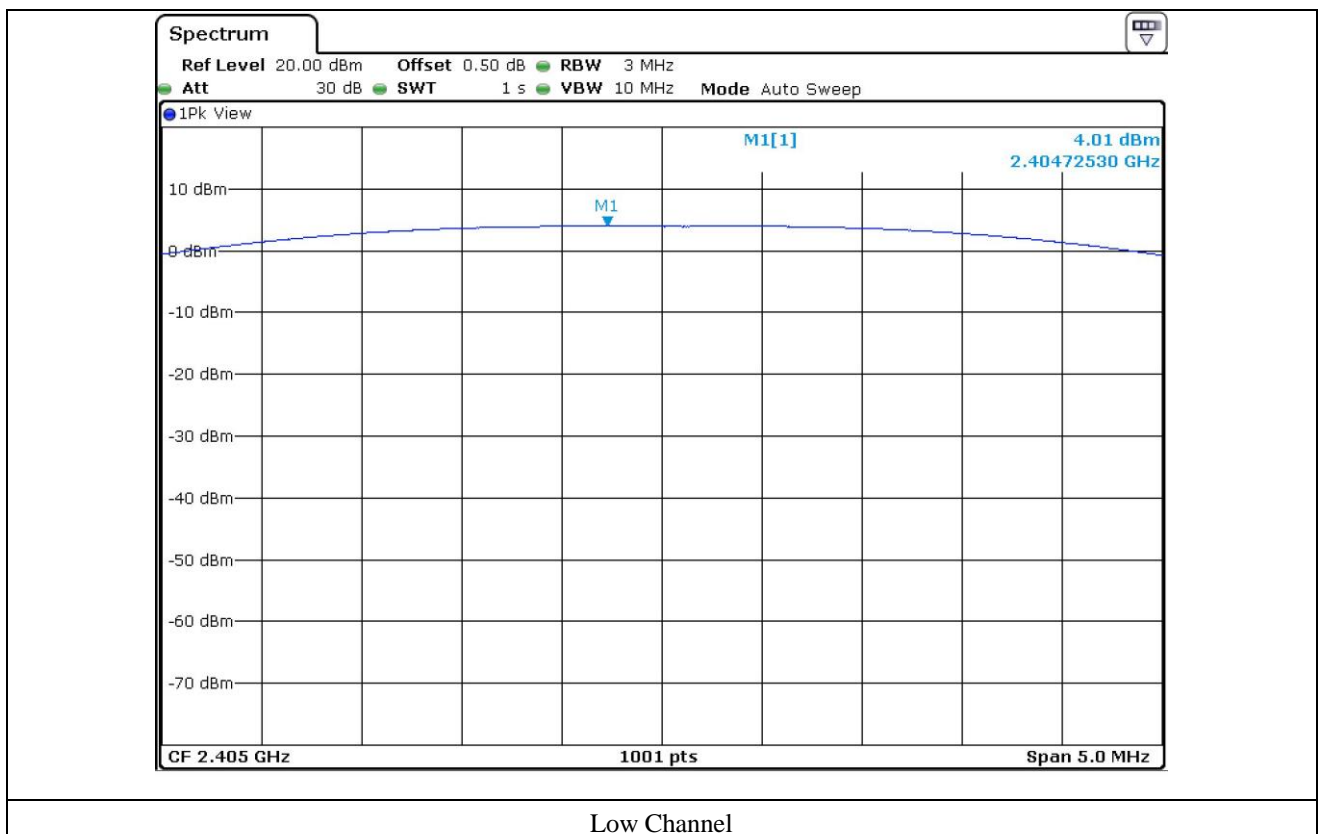

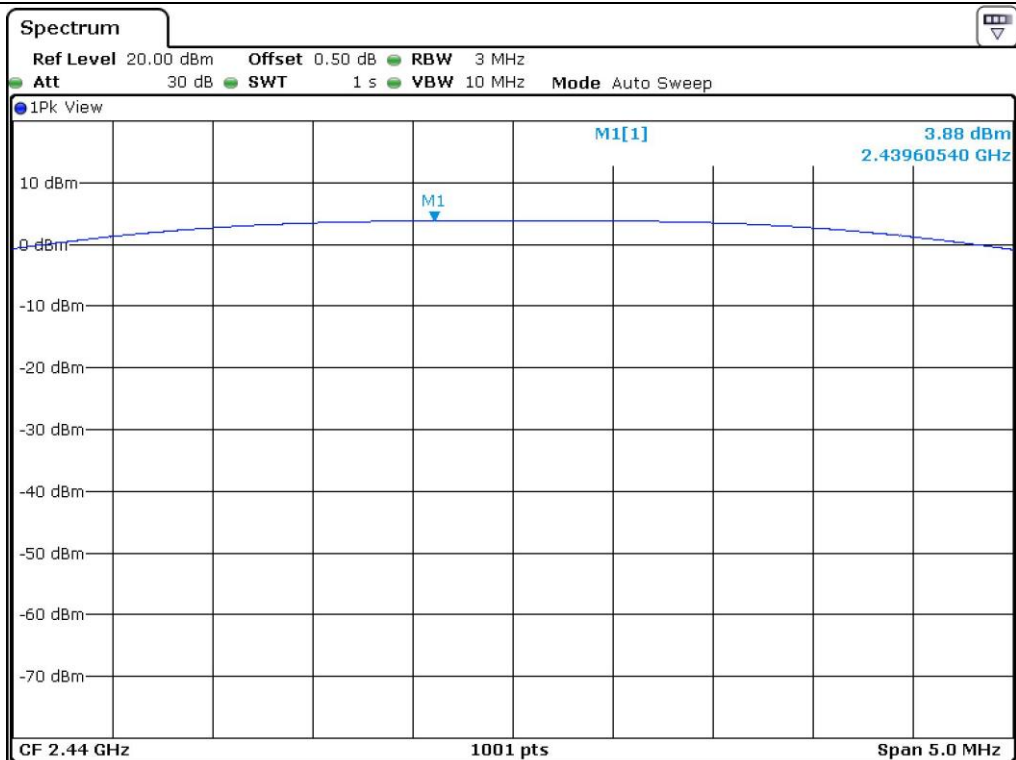

Middle Channel

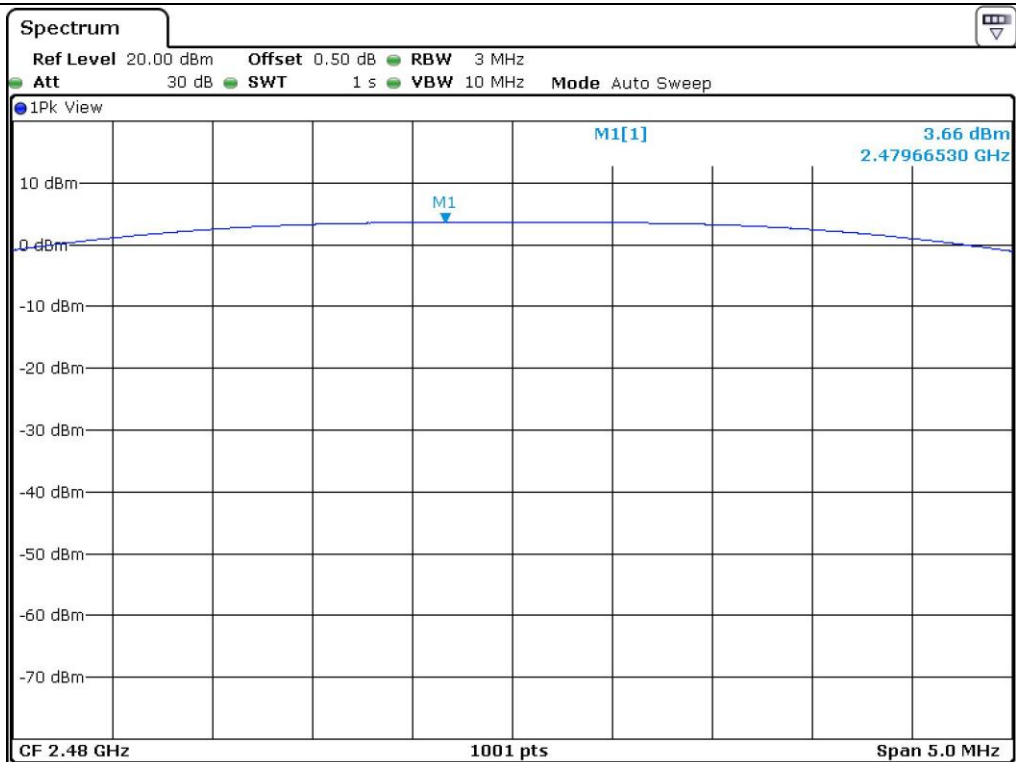

High Channel

11. RADIATED EMISSION TEST

11.1 Operating environment

Temperature : 24.2 °C
Relative humidity : 45.0 % R.H.

11.2 Test set-up

The radiated emissions measurements were performed on the 3 m semi anechoic chamber. The EUT and other support equipment were placed on a non-conductive turntable above the ground plane. The interconnecting cables from outside test site were inserted into ferrite clamps at the point where the cables reach the turntable.

The frequency spectrum from 9 kHz to 26.5 GHz was scanned and emission levels maximized at each frequency recorded. The system was rotated 360°, and the antenna was varied in height between 1.0 and 4.0 meters in order to determine the maximum emission levels. This procedure was performed for both horizontal and vertical polarization of the receiving antenna.

11.3 Test equipment used

	Model Number	Manufacturer	Description	Serial Number	Last Cal.(Interval)
■ -	FSV40	Rohde & Schwarz	Signal Analyzer	101009	May 31, 2016 (1Y)
■ -	ESU	Rohde & Schwarz	EMI Test Receiver	100261	Apr. 29, 2016 (1Y)
■ -	310N	Sonoma Instrument	Pre-Amplifier	312544	Apr. 05, 2016 (1Y)
■ -	SCU-18	Rohde & Schwarz	Pre-Amplifier	10041	Nov. 23, 2015 (1Y)
■ -	DT3000	Innco System	Turn Table	930611	N/A
■ -	MA4000-EP	Innco System	Antenna Master	3320611	N/A
■ -	VULB9163	Schwarzbeck	TRILOG Broadband Antenna	9163-421	Apr. 15, 2016 (2Y)
■ -	BBHA9120D	Schwarzbeck	Horn Antenna	BBHA9120D295	Aug. 31, 2015 (2Y)
■ -	BBHA9170	Schwarzbeck	Horn Antenna	BBHA9170178	Apr. 31, 2015 (2Y)

All test equipment used is calibrated on a regular basis.

11.4 Test data

11.4.1 Test data for Below 30 MHz

- . Test Date : June 10, 2016
- . Resolution bandwidth : 200 Hz (from 9 kHz to 0.15 MHz), 9 kHz (from 0.15 MHz to 30 MHz)
- . Frequency range : 9 kHz ~ 30 MHz
- . Measurement distance : 3 m
- . Operating mode : Transmitting mode

Frequency (MHz)	Reading (dBμV)	Ant. Pol. (H/V)	Ant. Height (m)	Angle (°)	Ant. Factor (dB/m)	Cable Loss	Emission Level(dBμV/m)	Limits (dBμV/m)	Margin (dB)
It was not observed any emissions from the EUT.									




Tested by: Tae-Ho, Kim / Senior Engineer

11.4.2 Test data for 30 MHz ~ 1 000 MHz

- Test Date : June 10, 2016
 - Resolution bandwidth : 120 kHz
 - Frequency range : 30 MHz ~ 1 000 MHz
 - Measurement distance : 3 m
 - Operating mode : Transmitting mode

Operating condition : Low Channel

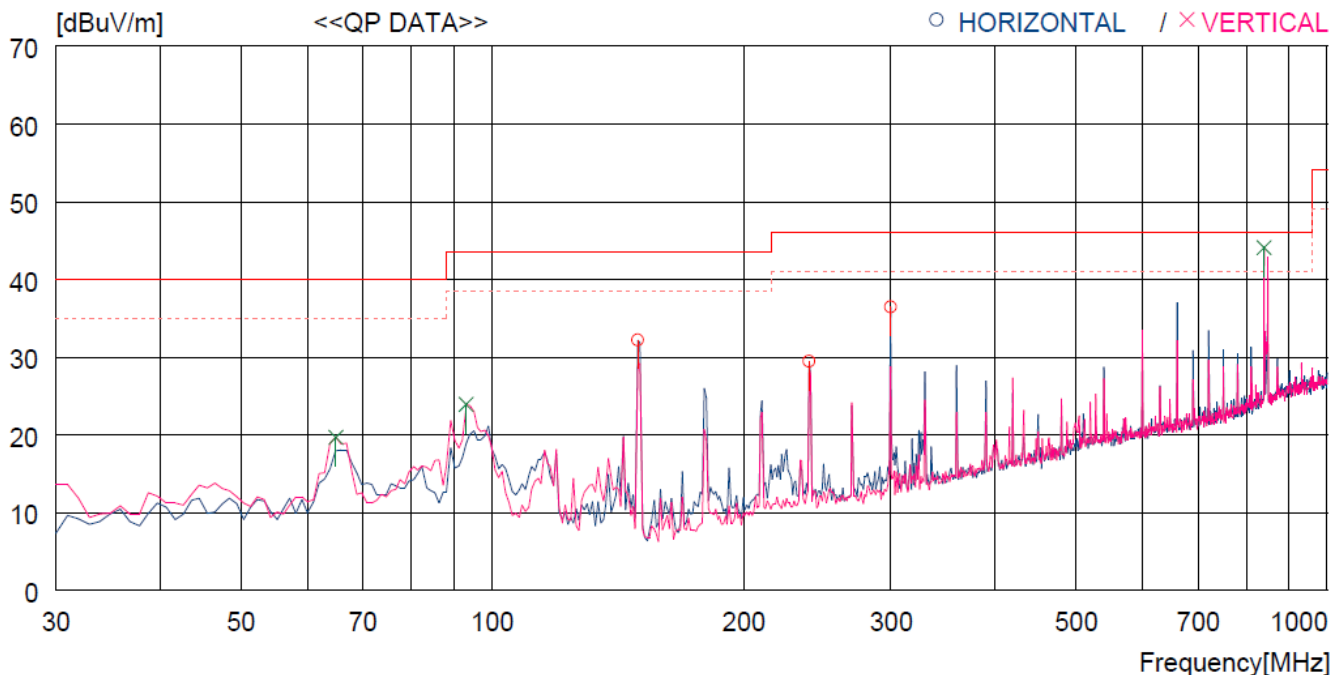

No.	FREQ	READING	ANT	LOSS	GAIN	RESULT	LIMIT	MARGIN	ANTENNA	TABLE
	[MHz]	[dBuV]	FACTOR	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	[cm]	[DEG]
----- Horizontal -----										
1	149.310	53.6	8.3	3.3	33.0	32.2	43.5	11.3	200	281
2	239.520	46.0	12.1	4.1	32.8	29.4	46.0	16.6	100	0
3	299.660	50.9	13.6	4.6	32.7	36.4	46.0	9.6	100	0
----- Vertical -----										
4	64.920	39.1	11.5	2.2	33.1	19.7	40.0	20.3	100	284
5	93.050	43.9	10.7	2.6	33.3	23.9	43.5	19.6	100	359
6	839.941	48.0	21.4	8.1	33.4	44.1	46.0	1.9	100	270


Remark: Margin (dB) = Limit – Result and Result = Reading Quasi- Peak + Antenna Factor + Loss – Gain

Loss and Gain in above table means Cable Loss and Pre-amplifier gain.

Operating condition : Middle Channel

[dBuV/m] <<QP DATA>>


○ HORIZONTAL / × VERTICAL

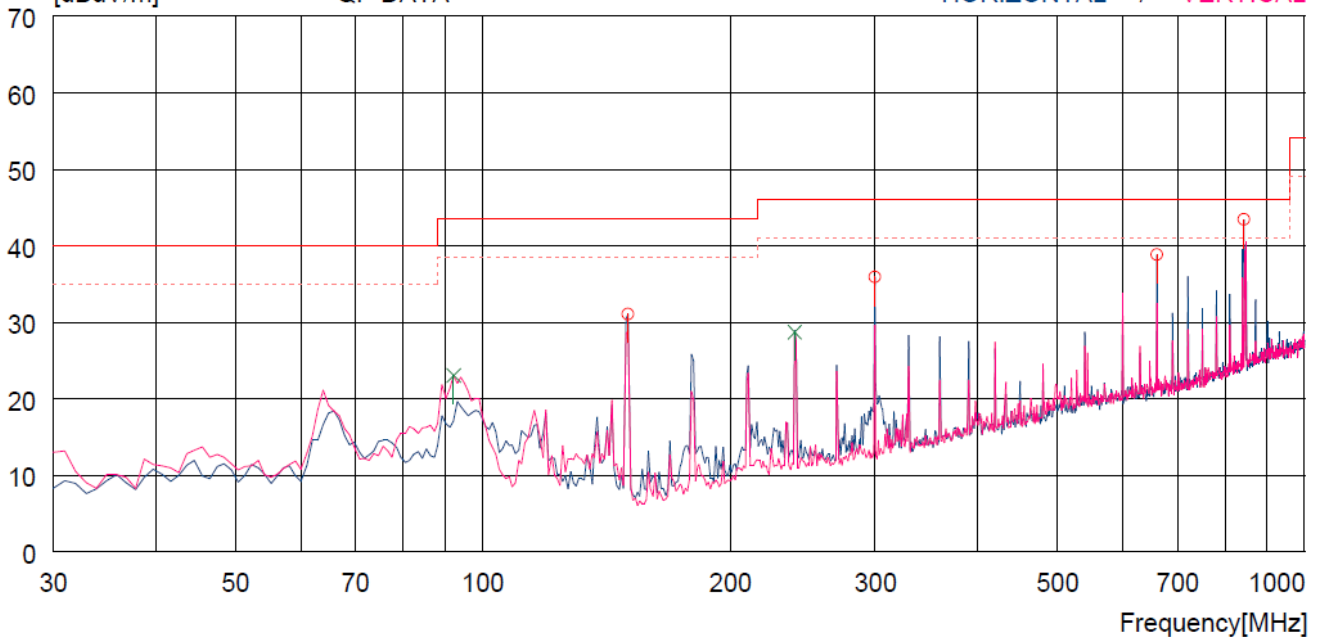

No.	FREQ [MHz]	READING QP [dBuV]	ANT FACTOR [dB]	LOSS [dB]	GAIN [dB]	RESULT [dBuV/m]	LIMIT [dBuV/m]	MARGIN [dB]	ANTENNA [cm]	TABLE [DEG]
----- Horizontal -----										
1	150.280	52.6	8.2	3.3	33.1	31.0	43.5	12.5	200	326
2	299.660	51.0	13.3	4.6	33.0	35.9	46.0	10.1	100	0
3	660.496	46.0	19.2	7.0	33.4	38.8	46.0	7.2	100	290
4	842.851	47.3	21.0	8.2	33.1	43.4	46.0	2.6	200	79
----- Vertical -----										
5	92.080	43.1	10.4	2.6	33.1	23.0	43.5	20.5	100	359
6	239.520	45.9	11.8	4.0	33.0	28.7	46.0	17.3	200	30

Remark: Margin (dB) = Limit – Result and Result = Reading Quasi- Peak + Antenna Factor + Loss – Gain

Loss and Gain in above table means Cable Loss and Pre-amplifier gain.

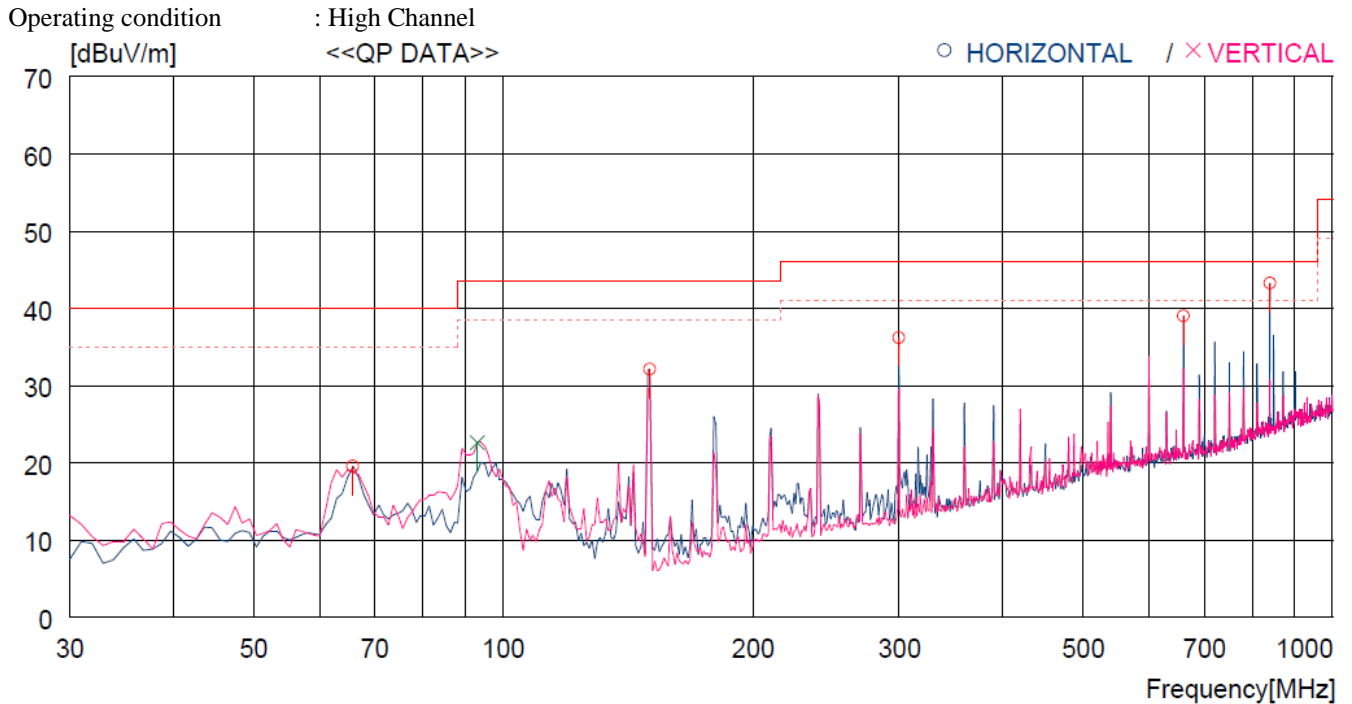

No.	FREQ	READING	ANT	LOSS	GAIN	RESULT	LIMIT	MARGIN	ANTENNA TABLE	
	[MHz]	[dBuV]	FACTOR	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	[cm]	[DEG]
----- Horizontal -----										
1	65.890	39.1	11.2	2.3	33.1	19.5	40.0	20.5	300	230
2	150.280	53.4	8.4	3.3	33.0	32.1	43.5	11.4	200	0
3	299.660	50.7	13.6	4.6	32.7	36.2	46.0	9.8	100	316
4	660.496	45.9	19.5	7.0	33.4	39.0	46.0	7.0	100	300
5	839.941	47.1	21.4	8.1	33.4	43.2	46.0	2.8	400	227
----- Vertical -----										
6	93.050	42.6	10.7	2.6	33.3	22.6	43.5	20.9	100	0

Remark: Margin (dB) = Limit – Result and Result = Reading Quasi- Peak + Antenna Factor + Loss – Gain

Loss and Gain in above table means Cable Loss and Pre-amplifier gain.

Tested by: Tae-Ho, Kim / Senior Engineer

11.4.3 Test data for above 1 GHz

- Test Date : June 10, 2016
- Resolution bandwidth : 1 MHz for Peak and Average Mode
- Video bandwidth : 1 MHz for Peak Mode, 10 Hz for Average Mode
- Frequency range : 1 GHz ~ 26.5 GHz
- Measurement distance : 3 m
- Operating mode : Transmitting mode

Frequency (MHz)	Reading (dBμV)	Ant. Pol. (H/V)	Ant. Height (m)	Angle (°)	Ant. Factor (dB/m)	Cable Loss	Emission Level(dBμV/m)	Limits (dBμV/m)	Margin (dB)
It was not observed any emissions from the EUT.									



Tested by: Tae-Ho, Kim / Senior Engineer