



FCC SAR TEST REPORT

Report No.: STS2104164H01

Issued for

JACS Solutions, Inc.

809 Pinnacle Drive, Suite R, Linthicum Heights, MD 21090

Product Name:	TT1001 10.1 inch Tablet
Brand Name:	N/A
Model Name:	TT1001V2
Series Model:	N/A
FCC ID:	2AGCDJACSTT1001V2
Test Standard:	ANSI/IEEE Std. C95.1
	FCC 47 CFR Part 2 (2.1093)
	IEEE 1528: 2013
Max. Report SAR (1g):	Body: 0.938 W/kg

Any reproduction of this document must be done in full. No single part of this document may be reproduced without permission from STS, All Test Data Presented in this report is only applicable to presented Test sample.

ShenZhen STS Test Services Co.,Ltd.

A 1/F, Building B, Zhuoke Science Park, No.190 Chongqing Road, HepingShequ, Fuyong Sub-District, Bao'an District, Shenzhen, Guang Dong, China

TEL: +86-755 3688 6288 FAX: +86-755 3688 6277 E-mail:sts@stsapp.com



STSLAB



Test Report Certification

Applicant's name : JACS Solutions, Inc.

Address..... : 809 Pinnacle Drive, Suite R, Linthicum Heights, MD 21090

Manufacture's Name : JACS Solutions, Inc.

Address..... : 809 Pinnacle Drive, Suite R, Linthicum Heights, MD 21090

Product description

Product name..... : TT1001 10.1 inch Tablet

Brand name : N/A

Model name : TT1001V2

Series Model..... : N/A

Standards : ANSI/IEEE Std. C95.1-1992
FCC 47 CFR Part 2 (2.1093)
IEEE 1528: 2013

The device was tested by Shenzhen STS Test Services Co., Ltd. in accordance with the measurement methods and procedures specified in KDB 865664 The test results in this report apply only to the tested sample of the stated device/equipment. Other similar device/equipment will not necessarily produce the same results due to production tolerance and measurement uncertainties.

Date of Test

Date (s) of performance of tests.....: 30 Apr. 2021 ~ 13 May 2021

Date of Issue : 31 May 2021

Test Result.....: **Pass**

Testing Engineer : Luffy He
(Luffy He)

Technical Manager : Sean She
(Sean she)

Authorized Signatory : Vita Li
(Vita Li)





Table of Contents

1. General Information	5
1.1 EUT Description	5
1.2 Test Environment	7
1.3 Test Factory	7
2. Test Standards and Limits	8
3. SAR Measurement System	9
3.1 Definition of Specific Absorption Rate (SAR)	9
3.2 SAR System	9
4. Tissue Simulating Liquids	12
4.1 Simulating Liquids Parameter Check	12
5. SAR System Validation	15
5.1 Validation System	15
5.2 Validation Result	15
6. SAR Evaluation Procedures	16
7. EUT Antenna Location Sketch	17
7.1 SAR test exclusion consider table	18
8. EUT Test Position	24
8.1 Body-worn Position Conditions	24
8.2 Hotspot mode exposure position condition	24
9. Uncertainty	25
9.1 Measurement Uncertainty	25
9.2 System validation Uncertainty	26
10. Conducted Power Measurement	27
10.1 Test Result	27
11. EUT And Test Setup Photo	47
11.1 EUT Photo	47
11.2 Setup Photo	50
12. SAR Result Summary	53
12.1 Body-worn SAR	53
12.2 repeated SAR measurement	58
13. Equipment List	61
Appendix A. System Validation Plots	62
Appendix B. SAR Test Plots	76
Appendix C. Probe Calibration And Dipole Calibration Report	99

**Revision History**

Rev.	Issue Date	Report No.	Effect Page	Contents
00	31 May 2021	STS2104164H01	ALL	Initial Issue





1. General Information

Environmental evaluation measurements of specific absorption rate (SAR) distributions in emulated human head and body tissues exposed to radio frequency (RF) radiation from wireless portable devices for compliance with the rules and regulations of the U.S. Federal Communications Commission (FCC).

1.1 EUT Description

Product Name	TT1001 10.1 inch Tablet		
Brand Name	N/A		
Model Name	TT1001V2		
Series Model	N/A		
Model Difference	N/A		
Device Category	Portable		
Product stage	Production unit		
RF Exposure Environment	General Population / Uncontrolled		
Hardware Version	MBV1.0		
Software Version	TT1001_JACS_V1.0.0		
Frequency Range	WCDMA Band II: 1850~1910MHz WCDMA Band IV : 1710~1755MHz WCDMA Band V : 824~849MHz LTE Band 2: 1850~1910MHz LTE Band 4 : 1710~1755MHz LTE Band 5: 824~849MHz LTE Band 12: 699-716MHz LTE Band 13: 777-787MHz LTE Band 14: 788-798MHz LTE Band 66: 1710-1780MHz LTE Band 71: 663-698MHz WLAN802.11b/g/n(HT20)/n(HT40): 2412~2462MHz 2.4G WLAN 802.11b/g/n20/n40: 2412 to 2462 MHz 5.2G WLAN 802.11a/n20/n40/ac20/ac40/ac80: 5150 to 5250 MHz 5.8G WLAN 802.11a/n20/n40/ac20/ac40/ac80: 5725 to 5875 MHz Bluetooth: 2402 to 2480 MHz		
Max. Reported SAR(1g): (Limit:1.6W/kg)	Band	Mode	Body worn and hotspot (W/kg)
	PCB	WCDMA Band II	0.621
	PCB	WCDMA Band IV	0.458
	PCB	WCDMA Band V	0.056
	PCB	LTE Band 2	0.632
	PCB	LTE Band 4	0.591
	PCB	LTE Band 5	0.036
	PCB	LTE Band 12	0.102
	PCB	LTE Band 13	0.067
	PCB	LTE Band 14	0.054
	PCB	LTE Band 66	0.654
	PCB	LTE Band 71	0.192



	DTS	2.4GHz WLAN ANT 1	0.737
	DTS	2.4GHz WLAN ANT 2	0.586
	DTS	2.4GHz WLAN ANT 1+2	0.621
	NII	5.2GHz WLAN ANT 1	0.610
	NII	5.2GHz WLAN ANT 2	0.885
	NII	5.2GHz WLAN ANT 1+2	0.938
	NII	5.8GHz WLAN ANT 1	0.360
	NII	5.8GHz WLAN ANT 2	0.608
	NII	5.8GHz WLAN ANT 1+2	0.319
	DSS	Bluetooth ^{Note}	0.209
FCC Equipment Class	PCS Licensed Transmitter(PCB) Part 15 Spread Spectrum Transmitter (DSS) Unlicensed National Information Infrastructure TX (NII) Digital Transmission System (DTS)		
Battery	Rated Voltage: 3.8V Charge Limit Voltage: 4.35V Capacity: 6500mAh		
Operating Mode	WCDMA: RMC LTE: QPSK, 16QAM WLAN: 802.11 a/b/g/n20/n40/ac20/ac40/ac80 Bluetooth: 4.2EDR (GFSK + π /4DQPSK+8DPSK) BLE: GFSK		
Antenna Specification	PIFA Antenna		
Hotspot Mode	Support		
DTM Mode	Not Support		
Note: 1. Bluetooth SAR was estimated 2. The EUT battery must be fully charged and checked periodically during the test to ascertain uniform power			



1.2 Test Environment

Ambient conditions in the SAR laboratory:

Items	Required
Temperature (°C)	18-25
Humidity (%RH)	30-70

1.3 Test Factory

ShenZhen STS Test Services Co.,Ltd.

A 1/F, Building B, Zhuoke Science Park, No.190 Chongqing Road, HepingShequ, Fuyong Sub-District, Bao'an District, Shenzhen, Guang Dong, China

FCC test Firm Registration No.: 625569

IC Registration No.: 12108A

A2LA Certificate No.: 4338.01





2. Test Standards and Limits

No.	Identity	Document Title
1	47 CFR Part 2	Frequency Allocations and Radio Treaty Matters; General Rules and Regulations
2	ANSI/IEEE Std. C95.1-1992	IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz
3	IEEE Std. 1528-2013	Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques
4	FCC KDB 447498 D01 v06	Mobile and Portable Device RF Exposure Procedures and Equipment Authorization Policies
5	FCC KDB 865664 D01 v01r04	SAR Measurement 100 MHz to 6 GHz
6	FCC KDB 865664 D02 v01r02	RF Exposure Reporting
7	FCC KDB 941225 D01 v03r01	SAR Measurement Procedures for 3G Devices
8	FCC KDB 941225 D06 v02r01	Hotspot Mode SAR
9	FCC KDB 648474 D04 v01r03	SAR Evaluation Considerations for Wireless Handsets
10	FCC KDB 248227 D01 Wi-Fi SAR v02r02	SAR Considerations for 802.11 Devices

(A). Limits for Occupational/Controlled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.4	8.0	20.0

(B). Limits for General Population/Uncontrolled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.08	1.6	4.0

NOTE: Whole-Body SAR is averaged over the entire body, partial-body SAR is averaged over any 1 gram of tissue defined as a tissue volume in the shape of a cube. SAR for hands, wrists, feet and ankles is averaged over any 10 grams of tissue defined as a tissue volume in the shape of a cube.

Population/Uncontrolled Environments:

Are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure.

Occupational/Controlled Environments:

Are defined as locations where there is exposure that may be incurred by people who are aware of the potential for exposure, (i.e. as a result of employment or occupation).

<p>NOTE</p> <p>GENERAL POPULATION/UNCONTROLLED EXPOSURE</p> <p>PARTIAL BODY LIMIT</p> <p>1.6 W/kg</p>

3. SAR Measurement System

3.1 Definition of Specific Absorption Rate (SAR)

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). The equation description is as below:

$$SAR = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dv} \right)$$


SAR is expressed in units of Watts per kilogram (W/kg) SAR measurement can be related to the electrical field in the tissue by

$$SAR = \frac{\sigma E^2}{\rho}$$

Where: σ is the conductivity of the tissue,
ρ is the mass density of the tissue and E is the RMS electrical field strength.

3.2 SAR System

MVG SAR System Diagram:

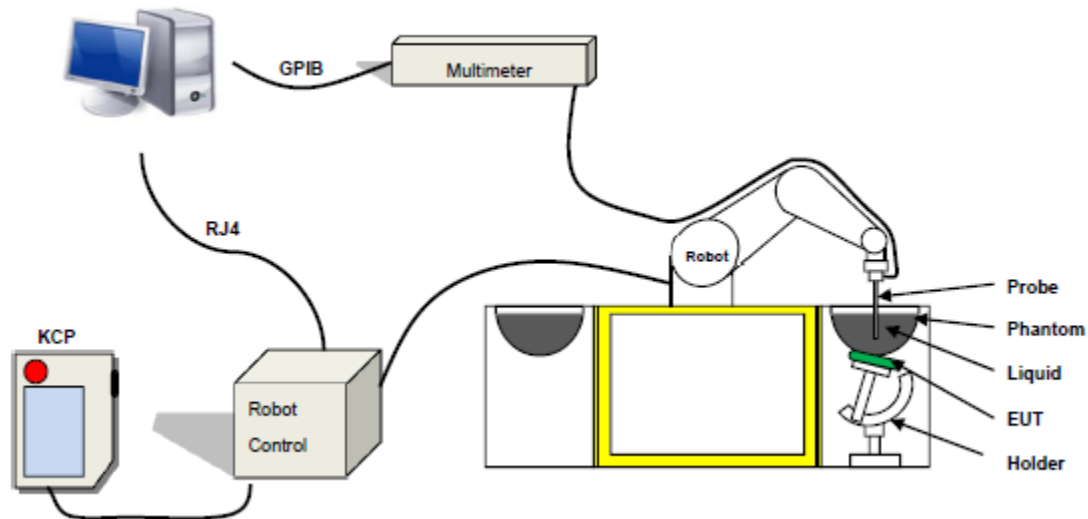

COMOSAR is a system that is able to determine the SAR distribution inside a phantom of human being according to different standards. The COMOSAR system consists of the following items:

- Main computer to control all the system
- 6 axis robot
- Data acquisition system
- Miniature E-field probe
- Phone holder
- Head simulating tissue

The following figure shows the system.



The EUT under test operating at the maximum power level is placed in the phone holder, under the phantom, which is filled with head simulating liquid. The E-Field probe measures the electric field inside the phantom. The Open SAR software computes the results to give a SAR value in a 1g or 10g mass.

3.2.1 Probe

For the measurements the Specific Dosimetric E-Field Probe SN 07/21 EPG0352 with following specifications is used

- Probe Length: 330 mm
- Length of Individual Dipoles: 2 mm
- Maximum external diameter: 8 mm
- Probe Tip External Diameter: 2.5 mm
- Distance between dipole/probe extremity: 1 mm
- Dynamic range: 0.01-100 W/kg
- Probe linearity: 3%
- Axial Isotropy: < 0.10 dB
- Spherical Isotropy: < 0.10 dB
- Calibration range: 450 MHz to 6 GHz for head & body simulating liquid.
- Angle between probe axis (evaluation axis) and surface normal line: less than 30°



Figure 1-MVG COMOSAR Dosimetric E field Dipole

3.2.2 Phantom

For the measurements the Specific Anthropomorphic Mannequin (SAM) defined by the IEEE SCC-34/SC2 group is used. The phantom is a polyurethane shell integrated in a wooden table. The thickness of the phantom amounts to 2mm +/- 0.2mm. It enables the dosimetric evaluation of left and right phone usage and includes an additional flat phantom part for the simplified performance check. The phantom set-up includes a cover, which prevents the evaporation of the liquid.

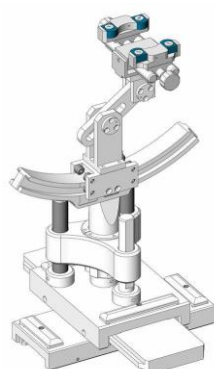


Figure-SN 32/14 SAM115



Figure-SN 32/14 SAM116

3.2.3 Device Holder



The SAR in the phantom is approximately inversely proportional to the square of the distance between the source and the liquid surface. For a source at 5 mm distance, a positioning uncertainty of ± 0.5 mm would produce a SAR uncertainty of ± 20 %. Accurate device positioning is therefore crucial for accurate and repeatable measurements. The positions in which the devices must be measured are defined by the standards.



4. Tissue Simulating Liquids

4.1 Simulating Liquids Parameter Check

The head tissue dielectric parameters recommended by the IEEE SCC-34/SC-2 in P1528 have been incorporated in the following table. These head parameters are derived from planar layer models simulating the highest expected SAR for the dielectric properties and tissue thickness variations in a human head. Other head and body tissue parameters that have not been specified in P1528 are derived from the tissue dielectric parameters computed from the 4-Cole-Cole equations described in Reference [12] and extrapolated according to the head parameters specified in P1528.

Head Tissue

Frequency (MHz)	cellulose	DGBE	HEC	NaCl	Preventol	Sugar	X100	Water	Conductivity	Permittivity
	%	%	%	%	%	%	%	%	σ	ϵ_r
750	0.2	/	/	1.4	0.2	57.0	/	41.1	0.89	41.9
835	0.2	/	/	1.4	0.2	57.9	/	40.3	0.90	41.5
900	0.2	/	/	1.4	0.2	57.9	/	40.3	0.97	41.5
1800	/	44.5	/	0.3	/	/	30.45	55.2	1.4	40.0
1900	/	44.5	/	0.3	/	/	30.45	55.2	1.4	40.0
2000	/	44.5	/	0.3	/	/	/	55.2	1.4	40.0
2450	/	44.9	/	0.1	/	/	/	55.0	1.80	39.2
2600	/	45.0	/	0.1	/	/	/	54.9	1.96	39.0

Body Tissue

Frequency (MHz)	cellulose	DGBE	HEC	NaCl	Preventol	Sugar	X100	Water	Conductivity	Permittivity
	%	%	%	%	%	%	%	%	σ	ϵ_r
750	0.2	/	/	0.9	0.1	47.2	/	51.7	0.96	55.5
835	0.2	/	/	0.9	0.1	48.2	/	50.8	0.97	55.2
900	0.2	/	/	0.9	0.1	48.2	/	50.8	1.05	55.0
1800	/	29.4	/	0.4	/	/	30.45	70.2	1.52	53.3
1900	/	29.4	/	0.4	/	/	30.45	70.2	1.52	53.3
2000	/	29.4	/	0.4	/	/	/	70.2	1.52	53.3
2450	/	31.3	/	0.1	/	/	/	68.6	1.95	52.7
2600	/	31.7	/	0.1	/	/	/	68.2	2.16	52.3

Tissue dielectric parameters for head and body phantoms				
Frequency	ϵ_r		σ	
	S/m		S/m	
	Head	Body	Head	Body
300	45.3	58.2	0.87	0.92
450	43.5	56.7	0.87	0.94
900	41.5	55.0	0.97	1.05
1450	40.5	54.0	1.20	1.30
1800	40.0	53.3	1.40	1.52
2450	39.2	52.7	1.80	1.95
3000	38.5	52.0	2.40	2.73
5800	35.3	48.2	5.27	6.00



LIQUID MEASUREMENT RESULTS

Date	Ambient condition		Simulating Liquid		Parameters	Target	Measured	Deviation [%]	Limited [%]
	Temp. [°C]	Humidity [%]	Frequency	Temp. [°C]					
2021-04-30	23.8	49	688 MHz	23.5	Permittivity	42.23	43.47	2.95	± 5
					Conductivity	0.89	0.90	1.06	± 5
2021-04-30	23.8	49	704 MHz	23.5	Permittivity	42.15	41.26	-2.11	± 5
					Conductivity	0.89	0.86	-3.73	± 5
2021-04-30	23.8	49	750 MHz	23.5	Permittivity	41.9	41.08	-1.96	± 5
					Conductivity	0.89	0.90	0.84	± 5
2021-04-30	23.8	49	782 MHz	23.5	Permittivity	41.75	42.25	1.20	± 5
					Conductivity	0.89	0.91	1.85	± 5
2021-04-30	23.8	49	793 MHz	23.5	Permittivity	41.70	42.01	0.74	± 5
					Conductivity	0.90	0.93	3.33	± 5
2021-05-06	22.5	53	826.6MHz	22.2	Permittivity	41.54	40.71	-1.99	± 5
					Conductivity	0.90	0.93	3.10	± 5
2021-05-06	22.5	53	835 MHz	22.2	Permittivity	41.5	41.19	-0.74	± 5
					Conductivity	0.9	0.88	-2.65	± 5
2021-05-06	22.5	53	844 MHz	22.2	Permittivity	41.50	40.62	-2.11	± 5
					Conductivity	0.91	0.89	-2.66	± 5
2021-05-08	22.3	48	1720MHz	22.0	Permittivity	40.11	40.94	2.08	± 5
					Conductivity	1.35	1.36	0.48	± 5
2021-05-08	22.3	48	1740MHz	22.0	Permittivity	40.09	38.87	-3.04	± 5
					Conductivity	1.37	1.39	1.13	± 5
2021-05-08	22.3	48	1800MHz	22.0	Permittivity	40	40.99	2.49	± 5
					Conductivity	1.4	1.40	0.00	± 5
2021-05-08	22.3	48	1880MHz	22.0	Permittivity	40	41.85	4.63	± 5
					Conductivity	1.4	1.41	0.64	± 5
2021-05-10	24.3	52	1900MHz	24.0	Permittivity	40	40.47	1.18	± 5
					Conductivity	1.4	1.35	-3.33	± 5
2021-05-10	24.3	52	1907.4MHz	24.0	Permittivity	39.99	39.86	-0.33	± 5
					Conductivity	1.41	1.40	-0.99	± 5
2021-05-11	23.1	49	2437MHz	22.8	Permittivity	39.22	39.02	-0.51	± 5
					Conductivity	1.79	1.77	-1.02	± 5
2021-05-11	23.1	49	2450MHz	22.8	Permittivity	39.2	38.84	-0.91	± 5
					Conductivity	1.8	1.78	-1.31	± 5
2021-05-12	22.4	51	5180MHz	22.1	Permittivity	36.02	35.22	-2.23	± 5
					Conductivity	4.64	4.64	0.00	± 5
2021-05-12	22.4	51	5200MHz	22.1	Permittivity	36	34.60	-3.90	± 5
					Conductivity	4.66	4.49	-3.55	± 5




2021-05-12	22.4	51	5240MHz	22.1	Permittivity	36.02	36.23	0.58	± 5
					Conductivity	4.64	4.62	-0.34	± 5
2021-05-13	22.8	50	5785MHz	22.5	Permittivity	35.32	34.71	-1.72	± 5
					Conductivity	5.25	5.30	0.87	± 5
2021-05-13	22.8	50	5800MHz	22.5	Permittivity	35.3	36.42	3.17	± 5
					Conductivity	5.27	5.27	0.00	± 5
2021-05-13	22.8	50	5825MHz	22.5	Permittivity	35.28	35.46	0.51	± 5
					Conductivity	5.30	5.32	0.33	± 5



5. SAR System Validation

5.1 Validation System

Each MVG system is equipped with one or more system validation kits. These units, together with the predefined measurement procedures within the MVG software, enable the user to conduct the system performance check and system validation. System kit includes a dipole, and dipole device holder. The system check verifies that the system operates within its specifications. It's performed daily or before every SAR measurement. The system check uses normal SAR measurement in the flat section of the phantom with a matched dipole at a specified distance. The system validation setup is shown as below.

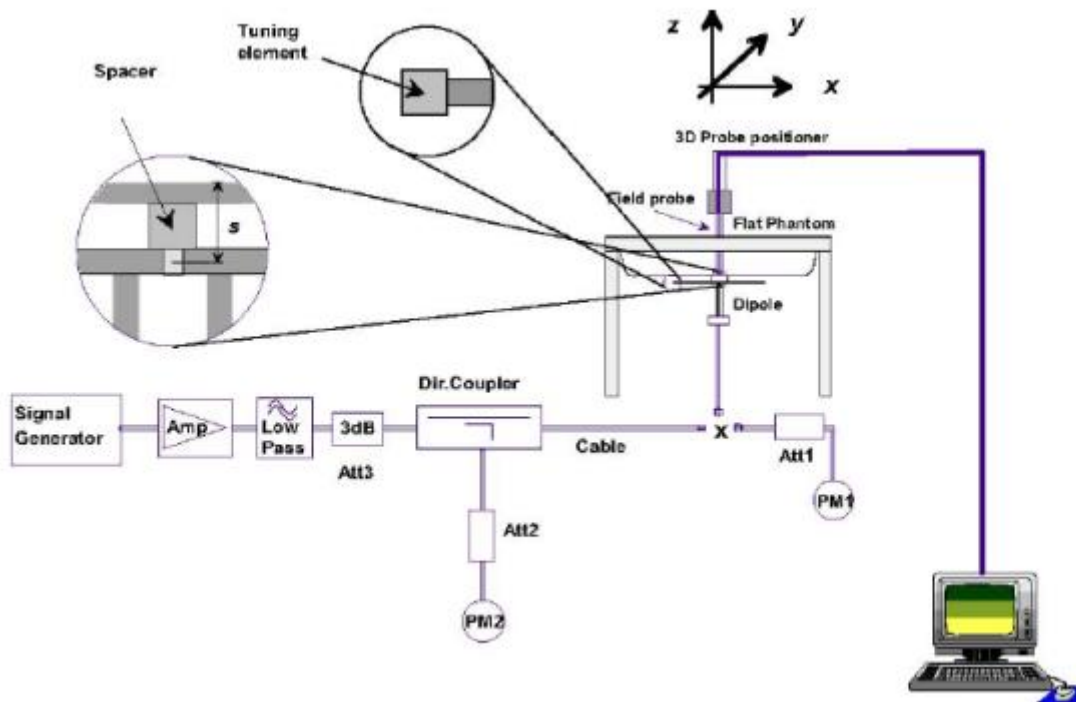

5.2 Validation Result

Comparing to the original SAR value provided by MVG, the validation data should be within its specification of 10 %.

Date	Freq.	Power	Tested Value	Normalized SAR	Target SAR	Tolerance	Limit
	(MHz)	(mW)	(W/Kg)	(W/kg)	(W/kg)	(%)	(%)
2021-04-30	750	100	0.868	8.68	8.49	2.24	10
2021-05-06	835	100	0.925	9.25	9.56	-3.24	10
2021-05-08	1800	100	3.940	39.40	38.40	2.60	10
2021-05-10	1900	100	3.985	39.85	39.70	0.38	10
2021-05-11	2450	100	5.154	51.54	52.40	-1.64	10
2021-05-12	5200	100	16.148	161.48	159.00	1.56	10
2021-05-13	5800	100	18.321	183.21	181.20	1.11	10

Note:

1. The tolerance limit of System validation $\pm 10\%$.
2. The dipole input power (forward power) was 100 mW.
3. The results are normalized to 1 W input power.



6. SAR Evaluation Procedures

The procedure for assessing the average SAR value consists of the following steps:


The following steps are used for each test position

- Establish a call with the maximum output power with a base station simulator. The connection between the mobile and the base station simulator is established via air interface
- Measurement of the local E-field value at a fixed location. This value serves as a reference value for calculating a possible power drift.
- Measurement of the SAR distribution with a grid of 8 to 16mm * 8 to 16 mm and a constant distance to the inner surface of the phantom. Since the sensors cannot directly measure at the inner phantom surface, the values between the sensors and the inner phantom surface are extrapolated. With these values the area of the maximum SAR is calculated by an interpolation scheme.
- Around this point, a cube of 30 * 30 * 30 mm or 32 * 32 * 32 mm is assessed by measuring 5 or 8 * 5 or 8*4 or 5 mm. With these data, the peak spatial-average SAR value can be calculated.

Area Scan& Zoom Scan:


First Area Scan is used to locate the approximate location(s) of the local peak SAR value(s). The measurement grid within an Area Scan is defined by the grid extent, grid step size and grid offset. Next, in order to determine the EM field distribution in a three-dimensional spatial extension, Zoom Scan is required. The Zoom Scan is performed around the highest E-field value to determine the averaged SAR -distribution over 10 g. Area scan and zoom scan resolution setting follows KDB 865664 D01v01r01 quoted below.

When the 1-g SAR of the highest peak is within 2 dB of the SAR limit, additional zoom scans are required for other peaks within 2 dB of the highest peak that have not been included in any zoom scan to ensure there is no increase in SAR.

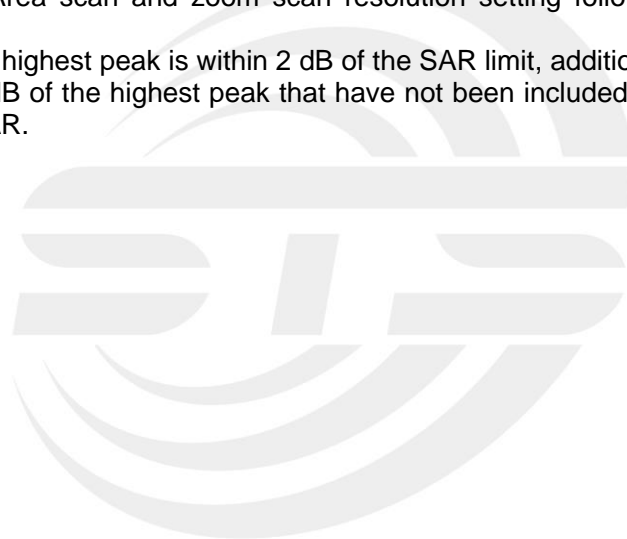

7. EUT Antenna Location Sketch

It is a Ruby 10, support BT/WLAN mode.

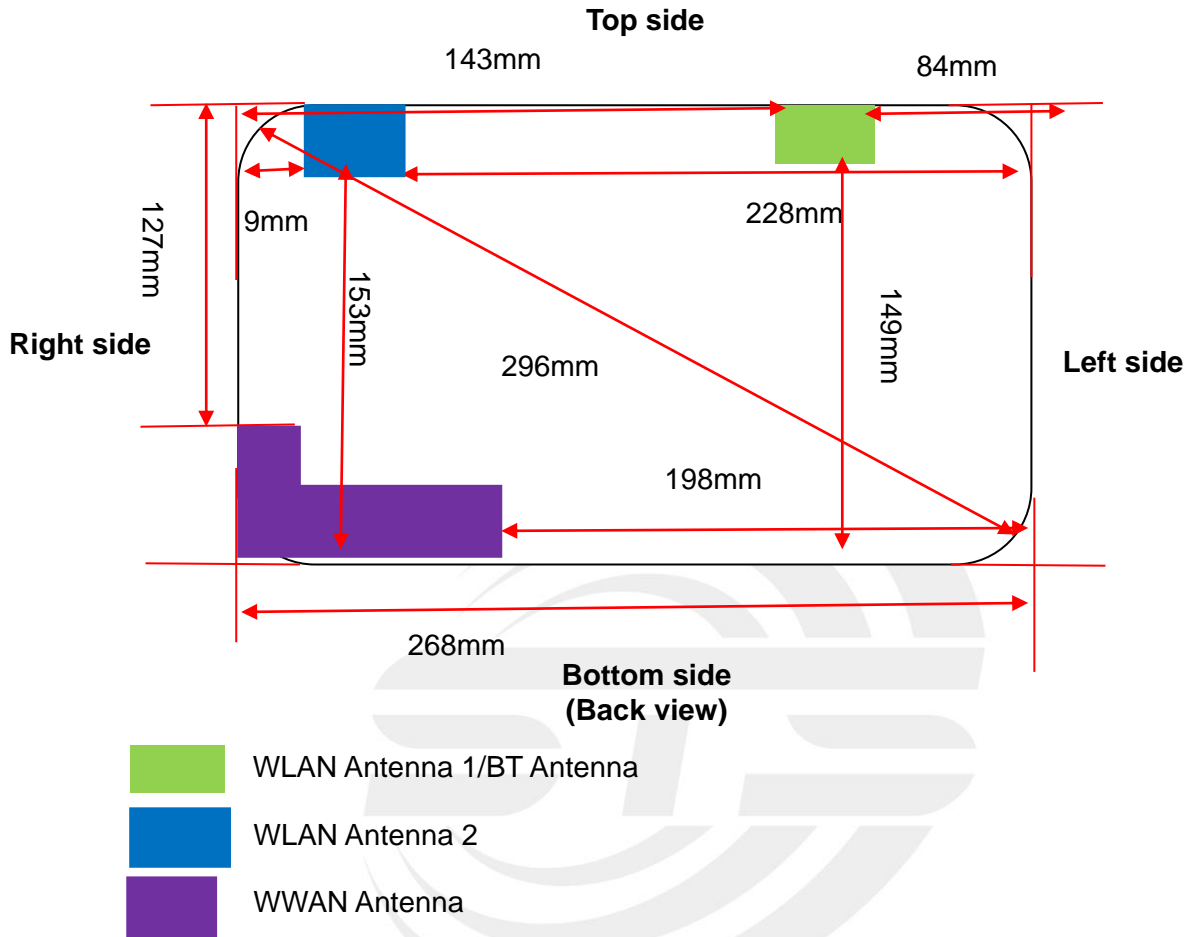

Note 1: The antenna information refer the manufacturer provide report, applicable only to the tested sample identified in the report.



7.1 SAR test exclusion consider table

The WWAN/WLAN/BT SAR evaluation of Maximum power (dBm) summing tolerance.

Exposure Position	Wireless Interface	WCDMA II	WCDMA IV	WCDMA V	LTE Band 2	LTE Band 4
	Calculated Frequency(MHz)	1907.4	1740.0	826.6	1880	1754.3
	Maximum power (dBm)	22	22	22.5	24.5	24.5
	Maximum rated power(mW)	158.49	158.49	177.83	281.84	281.84
Back Side	Separation distance (mm)	5	5	5	5	5
	exclusion threshold(mW)	10.86	11.37	16.50	10.94	11.33
	Testing required?	YES	YES	YES	YES	YES
Left Edge	Separation distance (mm)	198	198	198	198	198
	exclusion threshold(mW)	1588.61	1593.71	980.56	1589.40	1593.25
	Testing required?	NO	NO	NO	NO	NO
Right Edge	Separation distance (mm)	5	5	5	5	5
	exclusion threshold(mW)	10.86	11.37	16.50	10.94	11.33
	Testing required?	YES	YES	YES	YES	YES
Top Edge	Separation distance (mm)	127	127	127	127	127
	exclusion threshold(mW)	878.61	883.71	589.31	879.40	883.25
	Testing required?	NO	NO	NO	NO	NO
Bottom Edge	Separation distance (mm)	5	5	5	5	5
	exclusion threshold(mW)	10.86	11.37	16.50	10.94	11.33
	Testing required?	YES	YES	YES	YES	YES



Exposure Position	Wireless Interface	LTE Band 5	LTE Band 12	LTE Band 13	LTE Band 14	LTE Band 66
	Calculated Frequency(MHz)	844	699.7	782	793	1779.3
	Maximum power (dBm)	24.5	24.5	25	24.5	24
	Maximum rated power(mW)	281.84	281.84	316.23	281.84	251.19
Back Side	Separation distance (mm)	5	5	5	5	5
	exclusion threshold(mW)	16.33	17.93	16.96	16.84	11.25
	Testing required?	YES	YES	YES	YES	YES
Left Edge	Separation distance (mm)	198	198	198	198	198
	exclusion threshold(mW)	996.02	869.69	941.20	950.87	1592.45
	Testing required?	NO	NO	NO	NO	NO
Right Edge	Separation distance (mm)	5	5	5	5	5
	exclusion threshold(mW)	16.33	17.93	16.96	16.84	11.25
	Testing required?	YES	YES	YES	YES	YES
Top Edge	Separation distance (mm)	127	127	127	127	127
	exclusion threshold(mW)	596.53	538.50	571.05	575.52	882.45
	Testing required?	NO	NO	NO	NO	NO
Bottom Edge	Separation distance (mm)	5	5	5	5	5
	exclusion threshold(mW)	16.33	17.93	16.96	16.84	11.25
	Testing required?	YES	YES	YES	YES	YES



Exposure Position	Wireless Interface	LTE Band 71	BT	2.4G WLAN 802.11b ANT 1	2.4G WLAN 802.11b ANT 2	2.4G WLAN 802.11n20 ANT 1
	Calculated Frequency(MHz)	665.5	2440	2437	2437	2437
	Maximum power (dBm)	24.5	7	23.1	21.5	23.5
	Maximum rated power(mW)	281.84	5.01	204.17	141.25	223.87
Back Side	Separation distance (mm)	5	5	5	5	5
	exclusion threshold(mW)	18.39	9.60	9.61	9.61	9.61
	Testing required?	YES	NO	YES	YES	YES
Left Edge	Separation distance (mm)	198	84	84	228	84
	exclusion threshold(mW)	840.50	436.03	436.09	1876.09	436.09
	Testing required?	NO	NO	NO	NO	NO
Right Edge	Separation distance (mm)	5	143	143	9	143
	exclusion threshold(mW)	18.39	1026.03	1026.09	17.30	1026.09
	Testing required?	YES	NO	NO	YES	NO
Top Edge	Separation distance (mm)	127	5	5	5	5
	exclusion threshold(mW)	525.50	9.60	9.61	9.61	9.61
	Testing required?	NO	NO	YES	YES	YES
Bottom Edge	Separation distance (mm)	5	149	149	153	149
	exclusion threshold(mW)	18.39	1086.03	1086.09	1126.09	1086.09
	Testing required?	YES	NO	NO	NO	NO



Exposure Position	Wireless Interface	2.4G WLAN 802.11n20 ANT 2	5.2G WLAN 802.11a ANT 1	5.2G WLAN 802.11a ANT 2	5.2G WLAN 802.11n20 ANT 1	5.2G WLAN 802.11 n20 ANT 2
	Calculated Frequency(MHz)	2437	5180	5240	5180	5180
	Maximum power (dBm)	23.5	15	14	15.5	14.5
	Maximum rated power(mW)	223.87	31.62	25.12	35.48	28.18
Back Side	Separation distance (mm)	5	5	5	5	5
	exclusion threshold(mW)	9.61	6.59	6.55	6.59	6.59
	Testing required?	YES	YES	YES	YES	YES
Left Edge	Separation distance (mm)	228	84	228	84	228
	exclusion threshold(mW)	1876.09	405.91	1845.53	405.91	1845.91
	Testing required?	NO	NO	NO	NO	NO
Right Edge	Separation distance (mm)	9	143	9	143	9
	exclusion threshold(mW)	17.30	995.91	11.80	995.91	11.86
	Testing required?	YES	NO	YES	NO	YES
Top Edge	Separation distance (mm)	5	5	5	5	5
	exclusion threshold(mW)	9.61	6.59	6.55	6.59	6.59
	Testing required?	YES	YES	YES	YES	YES
Bottom Edge	Separation distance (mm)	153	149	153	149	153
	exclusion threshold(mW)	1126.09	1055.91	1095.53	1055.91	1095.91
	Testing required?	NO	NO	NO	NO	NO



Exposure Position	Wireless Interface	5.8G WLAN 802.11a ANT 1	5.8G WLAN 802.11a ANT 2	5.8G WLAN 802.11n20 ANT 1	5.8G WLAN 802.11 n20 ANT 2
	Calculated Frequency(MHz)	5825	5785	5825	5825
	Maximum power (dBm)	15.5	14	15	13.5
	Maximum rated power(mW)	35.48	25.12	31.62	22.39
Back Side	Separation distance (mm)	5	5	5	5
	exclusion threshold(mW)	6.22	6.24	6.22	6.22
	Testing required?	YES	YES	YES	YES
Left Edge	Separation distance (mm)	84	228	84	228
	exclusion threshold(mW)	402.15	1842.36	402.15	1842.15
	Testing required?	NO	NO	NO	NO
Right Edge	Separation distance (mm)	143	9	143	9
	exclusion threshold(mW)	992.15	11.23	992.15	11.19
	Testing required?	NO	YES	NO	YES
Top Edge	Separation distance (mm)	5	5	5	5
	exclusion threshold(mW)	6.22	6.24	6.22	6.22
	Testing required?	YES	YES	YES	YES
Bottom Edge	Separation distance (mm)	149	153	149	153
	exclusion threshold(mW)	1052.15	1092.36	1052.15	1092.15
	Testing required?	NO	NO	NO	NO

Note:

1. maximum power is the source-based time-average power and represents the maximum RF output power among production units.
2. per KDB 447498 D01, for larger devices, the test separation distance of adjacent edge configuration is determined by the closest separation between the antenna and the user.
3. per KDB 447498 D01, standalone SAR test exclusion threshold is applied; if the distance of the antenna to the user is <25mm,25mm is user to determine SAR exclusion threshold




4. per KDB 447498 D01, the 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distance $\leq 50\text{mm}$ are determined by:
[(max.power of channel, including tune-up tolerance, Mw)/(min. test separation distance, mm)]* $\sqrt{f(\text{GHZ})} \leq 3.0$ for 1-g SAR and ≤ 7.5 for 10-g extremity SAR ,f(GHz) is the RF channel transmit frequency in GHz. Power and distance are rounded to the nearest mW and mm before calculation. The result is rounded to one decimal place for comparison
For $< 50\text{mm}$ distance, we just calculate mW of the exclusion threshold value(3.0)to do compare
5. per KDB 447498 D01, at 100 MHz to 6GHz and for test separation distances $> 50\text{mm}$, the SAR test exclusion threshold is determined according to the following
 - a)[threshold at 50mm in step 1]+(test separation distance -50mm)*(f (MHz)/150)]mW, at 100 MHz to 1500 MHz
 - b) [threshold at 50mm in step1]+(test separation distance -50mm) *10]mW at $> 1500\text{MHz}$ and $\leq 6\text{GHz}$
6. Per KDB 248227 D01, choose the highest output power channel to test SAR and determine further SAR exclusion 8.for each frequency band ,testing at higher data rates and higher order modulations is not required when the maximum average output power for each of each of these configurations is less than 1/4db higher than those measured at the lower data rate than 11b mode ,thus the SAR can be excluded.
7. Per KDB 616217 D04, SAR evaluation for the front surface of tablet display screens are generally not necessary.

8. EUT Test Position

This EUT was tested in Front Face and Rear Face.

8.1 Body-worn Position Conditions


Body-worn accessory exposure is typically related to voice mode operations when handsets are carried in body-worn accessories. The body-worn accessory procedures in KDB Publication 447498 D01 should be used to test for body-worn accessory SAR compliance, without a headset connected to it. When the same wireless transmission configuration is used for testing body-worn accessory and hotspot mode SAR, respectively, in voice and data mode, SAR results for the most conservative *test separation distance* configuration may be used to support both SAR conditions. When the *reported SAR* for a body-worn accessory, measured without a headset connected to the handset, is $> 1.2 \text{ W/kg}$, the highest *reported SAR* configuration for that wireless mode and frequency band should be repeated for the body-worn accessory with a headset attached to the handset.

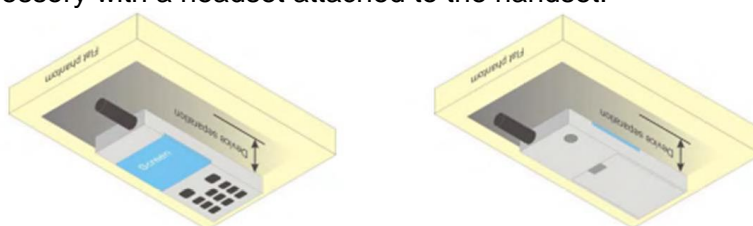

8.2 Hotspot mode exposure position condition

For handsets that support hotspot mode operations, with wireless router capabilities and various web browsing function, the relevant hand and body exposure condition are tested according to the hotspot SAR procedures in KDB 941225. A test separation distance of 10 mm is required between the phantom and all surface and edges with a transmitting antenna located within 25 mm from that surface or edge.

When form factor of a handset is smaller than $9\text{cm} \times 5\text{cm}$, a test separation distance of 5mm (instead of 10mm) is required for testing hotspot mode. When the separate distance required for body-worn accessory testing is larger than or equal to that tested for hotspot mode, in the same wireless mode and for the same surface of the phone, the hotspot mode SAR data may be used to support body-worn accessory SAR compliance for that particular configuration(surface).

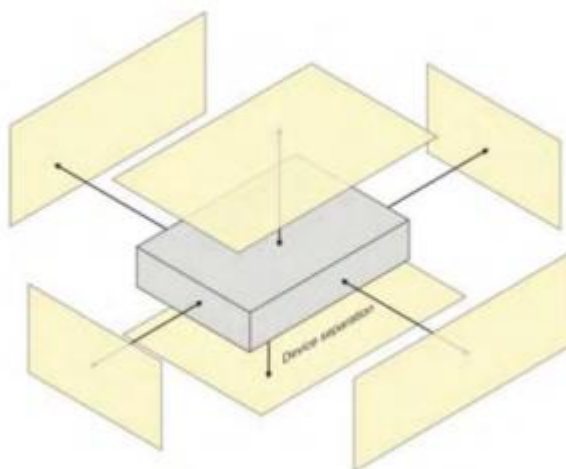



9. Uncertainty

9.1 Measurement Uncertainty

The following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in IEEE 1528: 2013. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Uncertainty Component	Tol (+-%)	Prob. Dist.	Div.	Ci (1g)	Ci (10g)	1g Ui (+-%)	10g Ui (+-%)	vi
Measurement System								
Probe calibration	5.831	N	1	1	1	5.83	5.83	∞
Axial Isotropy	0.695	R	$\sqrt{3}$	$\sqrt{0.5}$	$\sqrt{0.5}$	0.28	0.28	∞
Hemispherical Isotropy	1.045	R	$\sqrt{3}$	$\sqrt{0.5}$	$\sqrt{0.5}$	0.43	0.43	∞
Boundary effect	1.0	R	$\sqrt{3}$	1	1	0.58	0.58	∞
Linearity	0.685	R	$\sqrt{3}$	1	1	0.40	0.40	∞
System detection limits	1.0	R	$\sqrt{3}$	1	1	0.58	0.58	∞
Modulation response	3.0	R	$\sqrt{3}$	1	1	1.73	1.73	∞
Readout Electronics	0.021	N	1	1	1	0.021	0.021	∞
Response Time	0	R	$\sqrt{3}$	1	1	0	0	∞
Integration Time	1.4	R	$\sqrt{3}$	1	1	0.81	0.81	∞
RF ambient conditions-Noise	3.0	R	$\sqrt{3}$	1	1	1.73	1.73	∞
RF ambient conditions-reflections	3.0	R	$\sqrt{3}$	1	1	1.73	1.73	∞
Probe positioner mechanical tolerance	1.4	R	$\sqrt{3}$	1	1	0.81	0.81	∞
Probe positioning with respect to phantom shell	1.4	R	$\sqrt{3}$	1	1	0.81	0.81	∞
Post-processing	2.3	R	$\sqrt{3}$	1	1	1.33	1.33	∞
Test sample Related								
Test sample positioning	2.6	N	1	1	1	2.6	2.6	∞
Device holder uncertainty	3	N	1	1	1	3	3	∞
SAR drift measurement	5	R	$\sqrt{3}$	1	1	2.89	2.89	∞
SAR scaling	5	R	$\sqrt{3}$	1	1	2.89	2.89	∞
Phantom and tissue parameters								
Phantom uncertainty(shape and thickness uncertainty)	4	R	$\sqrt{3}$	1	1	2.31	2.31	∞
Uncertainty in SAR correction for deviations in permittivity and conductivity	1.9	N	1	1	0.84	1.90	1.60	∞
Liquid conductivity(temperature uncertainty)	2.5	R	$\sqrt{3}$	0.78	0.71	1.13	1.02	∞
Liquid conductivity(measured)	4	N	1	0.78	0.71	3.12	2.84	M
Liquid permittivity(temperature uncertainty)	2.5	R	$\sqrt{3}$	0.23	0.26	0.33	0.38	∞
Liquid permittivity(measured)	5	N	1	0.23	0.26	1.15	1.30	M
Combined Standard Uncertainty		RSS				9.79	9.59	
Expanded Uncertainty (95% Confidence interval)		K=2				19.58	19.18	



9.2 System validation Uncertainty

Uncertainty Component	Tol (+-%)	Prob. Dist.	Div.	Ci (1g)	Ci (10g)	1g Ui (+-%)	10g Ui (+-%)	vi
Measurement System								
Probe calibration	5.831	N	1	1	1	5.83	5.83	∞
Axial Isotropy	0.695	R	$\sqrt{3}$	1	1	0.40	0.40	∞
Hemispherical Isotropy	1.045	R	$\sqrt{3}$	0	0	0.00	0.00	∞
Boundary effect	1.0	R	$\sqrt{3}$	1	1	0.58	0.58	∞
Linearity	0.685	R	$\sqrt{3}$	1	1	0.40	0.40	∞
System detection limits	1.0	R	$\sqrt{3}$	1	1	0.58	0.58	∞
Modulation response	3.0	R	$\sqrt{3}$	0	0	0.00	0.00	∞
Readout Electronics	0.021	N	1	1	1	0.021	0.021	∞
Response Time	0.0	R	$\sqrt{3}$	0	0	0.00	0.00	∞
Integration Time	1.4	R	$\sqrt{3}$	0	0	0.00	0.00	∞
RF ambient conditions-Noise	3.0	R	$\sqrt{3}$	1	1	1.73	1.73	∞
RF ambient conditions-reflections	3.0	R	$\sqrt{3}$	1	1	1.73	1.73	∞
Probe positioner mechanical tolerance	1.4	R	$\sqrt{3}$	1	1	0.81	0.81	∞
Probe positioning with respect to phantom shell	1.4	R	$\sqrt{3}$	1	1	0.81	0.81	∞
Post-Processing	2.3	R	$\sqrt{3}$	1	1	1.33	1.33	∞
System validation source								
Deviation of experimental dipole from numerical dipole	5.0	N	1	1	1	5.00	5.00	∞
Input power and SAR drift measurement	5.0	R	$\sqrt{3}$	1	1	2.89	2.89	∞
Other source contribution Uncertainty	2.0	R	$\sqrt{3}$	1	1	1.15	1.15	∞
Phantom and set-up								
Phantom uncertainty(shape and thickness uncertainty)	4.0	R	$\sqrt{3}$	1	1	2.31	2.31	∞
Uncertainty in SAR correction for deviations in permittivity and conductivity	1.9	N	1	1	0.84	1.90	1.60	∞
Liquid conductivity(temperature uncertainty)	2.5	R	$\sqrt{3}$	0.78	0.71	1.13	1.02	∞
Liquid conductivity(measured)	4	N	1	0.78	0.71	3.12	2.84	M
Liquid permittivity(temperature uncertainty)	2.5	R	$\sqrt{3}$	0.23	0.26	0.33	0.38	∞
Liquid permittivity(measured)	5	N	1	0.23	0.26	1.15	1.30	M
Combined Standard Uncertainty		RSS				9.718	9.517	
Expanded Uncertainty (95% Confidence interval)		K=2				19.44	19.04	



10. Conducted Power Measurement

10.1 Test Result WCDMA

Band	WCDMA Band V			WCDMA Band II			WCDMA Band IV		
Channel	4132	4183	4233	9262	9400	9538	1312	1413	1513
Frequency (MHz)	826.4	836.6	846.6	1852.4	1880.0	1907.6	1712.6	1740	1752.4
RMC 12.2Kbps	22.40	22.35	22.33	21.67	21.68	21.71	21.85	21.94	21.81

According to 3GPP 25.101 sub-clause 6.2.2, the maximum output power is allowed to be reduced by following the table.

2.4G WLAN

Test Mode	Frequency (MHz)	Tx Type	Measured Average Output Power (dBm)			Verdict
			Ant 1	Ant 2	Total	
802.11b	2412	SISO	22.00	20.20	/	PASS
	2437	SISO	23.04	21.34	/	PASS
	2462	SISO	22.32	20.31	/	PASS
802.11g	2412	SISO	24.03	22.65	/	PASS
	2437	SISO	24.87	23.56	/	PASS
	2462	SISO	24.27	22.92	/	PASS
802.11n(HT20)	2412	MIMO	21.84	22.75	25.33	PASS
	2437	MIMO	23.29	23.34	26.33	PASS
	2462	MIMO	22.49	22.76	25.64	PASS

BT

Test Mode	Frequency (MHz)	Tx Type	Measured Average Output Power (dBm)	Verdict
			Ant 1	
GFSK	2402	SISO	0.35	PASS
	2441	SISO	1.08	PASS
	2480	SISO	0.19	PASS
Pi/4DQPSK	2402	SISO	-1.75	PASS
	2441	SISO	-0.91	PASS
	2480	SISO	-1.75	PASS
8DPSK	2402	SISO	-1.85	PASS
	2441	SISO	-1.01	PASS
	2480	SISO	-1.85	PASS



BLE

Test Mode	Frequency (MHz)	Tx Type	Measured Average Output Power (dBm)	Verdict
			Ant 1	
1M	2402	SISO	5.92	PASS
	2440	SISO	6.77	PASS
	2480	SISO	6.01	PASS

5G WLAN

Test Mode	Frequency (MHz)	Tx Type	Measured Output Power (dBm)			Verdict
			Ant 1	Ant 2	Total	
802.11a	5180	SISO	14.65	13.66	/	PASS
	5200	SISO	14.53	13.68	/	PASS
	5240	SISO	14.61	13.95	/	PASS
	5745	SISO	14.73	13.17	/	PASS
	5785	SISO	14.57	13.46	/	PASS
	5825	SISO	15.07	13.10	/	PASS
802.11n(HT20)	5180	MIMO	15.04	13.52	17.36	PASS
	5200	MIMO	14.41	13.64	17.05	PASS
	5240	MIMO	14.14	14.19	17.18	PASS
	5745	MIMO	14.49	12.87	16.77	PASS
	5785	MIMO	14.61	13.09	16.93	PASS
	5825	MIMO	14.79	12.73	16.89	PASS
802.11n(HT40)	5190	MIMO	13.16	12.15	15.69	PASS
	5230	MIMO	12.81	12.55	15.69	PASS
	5755	MIMO	14.10	12.62	16.43	PASS
	5795	MIMO	14.28	12.47	16.48	PASS
802.11ac(VHT20)	5180	MIMO	14.98	13.50	17.31	PASS
	5200	MIMO	14.42	13.63	17.05	PASS
	5240	MIMO	14.13	14.00	17.08	PASS
	5745	MIMO	14.55	12.98	16.85	PASS
	5785	MIMO	14.43	13.20	16.87	PASS
	5825	MIMO	14.75	12.82	16.90	PASS
802.11ac(VHT40)	5190	MIMO	13.10	12.18	15.67	PASS
	5230	MIMO	12.80	12.68	15.75	PASS
	5755	MIMO	14.04	12.42	16.32	PASS
	5795	MIMO	14.05	12.37	16.30	PASS



802.11ac(VHT80)	5210	MIMO	12.26	11.46	14.89	PASS
	5775	MIMO	13.14	12.07	15.65	PASS

LTE Power

Test Band: 2 _ 1.4MHz Bandwidth													
Modulation	RB Allocation		Conducted Power (dBm)			Antenna gain		EIRP(dBm)			Limit (dBm)	Verdict	
	Size	Offset	LCH	MCH	HCH	(dBd)	(dBi)	LCH	MCH	HCH			
QPSK	1	0	23.37	23.71	23.35	/	1.00	24.37	24.71	24.35	33.01	PASS	
		2	23.51	23.77	23.48	/	1.00	24.51	24.77	24.48	33.01	PASS	
		5	23.34	23.73	23.36	/	1.00	24.34	24.73	24.36	33.01	PASS	
	3	0	23.39	23.74	23.60	/	1.00	24.39	24.74	24.60	33.01	PASS	
		2	23.59	23.81	23.49	/	1.00	24.59	24.81	24.49	33.01	PASS	
		3	23.61	23.77	23.39	/	1.00	24.61	24.77	24.39	33.01	PASS	
	6	0	22.59	22.80	22.58	/	1.00	23.59	23.80	23.58	33.01	PASS	
	16QAM	1	0	22.25	23.04	22.44	/	1.00	23.25	24.04	23.44	33.01	PASS
			2	22.41	23.36	22.58	/	1.00	23.41	24.36	23.58	33.01	PASS
5			22.16	22.86	22.38	/	1.00	23.16	23.86	23.38	33.01	PASS	
3		0	22.34	22.68	22.29	/	1.00	23.34	23.68	23.29	33.01	PASS	
		2	22.35	22.75	22.19	/	1.00	23.35	23.75	23.19	33.01	PASS	
		3	22.33	22.43	22.17	/	1.00	23.33	23.43	23.17	33.01	PASS	
6		0	21.52	21.75	21.47	/	1.00	22.52	22.75	22.47	33.01	PASS	



Test Band: 2_ 3MHz Bandwidth												
Modulation	RB Allocation		Conducted Power (dBm)			Antenna gain		EIRP(dBm)			Limit (dBm)	Verdict
	Size	Offset	LCH	MCH	HCH	(dBd)	(dBi)	LCH	MCH	HCH		
QPSK	1	0	23.31	23.93	23.60	/	1.00	24.31	24.93	24.60	33.01	PASS
		7	23.37	23.80	23.44	/	1.00	24.37	24.80	24.44	33.01	PASS
		14	23.40	23.55	23.23	/	1.00	24.40	24.55	24.23	33.01	PASS
	8	0	22.38	22.83	22.52	/	1.00	23.38	23.83	23.52	33.01	PASS
		4	22.31	22.77	22.44	/	1.00	23.31	23.77	23.44	33.01	PASS
		7	22.21	22.70	22.34	/	1.00	23.21	23.70	23.34	33.01	PASS
15	0	22.28	22.74	22.41	/	1.00	23.28	23.74	23.41	33.01	PASS	
16QAM	1	0	22.21	23.32	22.21	/	1.00	23.21	24.32	23.21	33.01	PASS
		7	22.00	23.42	22.28	/	1.00	23.00	24.42	23.28	33.01	PASS
		14	21.87	23.04	22.06	/	1.00	22.87	24.04	23.06	33.01	PASS
	8	0	21.28	22.30	21.58	/	1.00	22.28	23.30	22.58	33.01	PASS
		4	21.21	22.08	21.51	/	1.00	22.21	23.08	22.51	33.01	PASS
		7	21.12	22.08	21.42	/	1.00	22.12	23.08	22.42	33.01	PASS
15	0	21.19	21.85	21.63	/	1.00	22.19	22.85	22.63	33.01	PASS	

Test Band: 2_ 5MHz Bandwidth												
Modulation	RB Allocation		Conducted Power (dBm)			Antenna gain		EIRP(dBm)			Limit (dBm)	Verdict
	Size	Offset	LCH	MCH	HCH	(dBd)	(dBi)	LCH	MCH	HCH		
QPSK	1	0	23.45	23.94	23.67	/	1.00	24.45	24.94	24.67	33.01	PASS
		13	23.21	23.63	23.55	/	1.00	24.21	24.63	24.55	33.01	PASS
		24	23.12	23.34	23.28	/	1.00	24.12	24.34	24.28	33.01	PASS
	12	0	22.29	22.77	22.65	/	1.00	23.29	23.77	23.65	33.01	PASS
		6	22.18	22.71	22.63	/	1.00	23.18	23.71	23.63	33.01	PASS
		13	22.07	22.56	22.37	/	1.00	23.07	23.56	23.37	33.01	PASS
25	0	22.18	22.70	22.55	/	1.00	23.18	23.70	23.55	33.01	PASS	
16QAM	1	0	22.37	23.09	22.60	/	1.00	23.37	24.09	23.60	33.01	PASS
		13	22.08	22.97	22.32	/	1.00	23.08	23.97	23.32	33.01	PASS
		24	21.93	22.68	22.29	/	1.00	22.93	23.68	23.29	33.01	PASS
	12	0	21.17	21.75	21.73	/	1.00	22.17	22.75	22.73	33.01	PASS
		6	21.02	21.80	21.73	/	1.00	22.02	22.80	22.73	33.01	PASS
		13	20.96	21.60	21.47	/	1.00	21.96	22.60	22.47	33.01	PASS
25	0	21.08	21.97	21.75	/	1.00	22.08	22.97	22.75	33.01	PASS	



Test Band: 2_ 10MHz Bandwidth												
Modulation	RB Allocation		Conducted Power (dBm)			Antenna gain		EIRP(dBm)			Limit (dBm)	Verdict
	Size	Offset	LCH	MCH	HCH	(dBd)	(dBi)	LCH	MCH	HCH		
QPSK	1	0	23.26	24.10	23.67	/	1.00	24.26	25.10	24.67	33.01	PASS
		25	23.13	24.09	23.75	/	1.00	24.13	25.09	24.75	33.01	PASS
		49	22.79	23.41	22.59	/	1.00	23.79	24.41	23.59	33.01	PASS
	25	0	22.08	22.92	22.98	/	1.00	23.08	23.92	23.98	33.01	PASS
		13	22.00	22.81	22.82	/	1.00	23.00	23.81	23.82	33.01	PASS
		25	21.77	22.44	22.67	/	1.00	22.77	23.44	23.67	33.01	PASS
50	0	21.87	22.68	22.67	/	1.00	22.87	23.68	23.67	33.01	PASS	
16QAM	1	0	22.31	23.47	22.38	/	1.00	23.31	24.47	23.38	33.01	PASS
		25	21.94	23.55	22.55	/	1.00	22.94	24.55	23.55	33.01	PASS
		49	21.61	22.67	21.94	/	1.00	22.61	23.67	22.94	33.01	PASS
	25	0	21.31	21.97	21.77	/	1.00	22.31	22.97	22.77	33.01	PASS
		13	21.17	21.84	21.71	/	1.00	22.17	22.84	22.71	33.01	PASS
		25	20.90	21.56	21.63	/	1.00	21.90	22.56	22.63	33.01	PASS
50	0	21.08	21.74	21.71	/	1.00	22.08	22.74	22.71	33.01	PASS	

Test Band: 2_ 15MHz Bandwidth												
Modulation	RB Allocation		Conducted Power (dBm)			Antenna gain		EIRP(dBm)			Limit (dBm)	Verdict
	Size	Offset	LCH	MCH	HCH	(dBd)	(dBi)	LCH	MCH	HCH		
QPSK	1	0	23.15	24.05	23.33	/	1.00	24.15	25.05	24.33	33.01	PASS
		38	22.63	23.88	23.74	/	1.00	23.63	24.88	24.74	33.01	PASS
		74	23.09	22.81	22.58	/	1.00	24.09	23.81	23.58	33.01	PASS
	36	0	21.95	23.02	22.65	/	1.00	22.95	24.02	23.65	33.01	PASS
		18	21.79	22.78	22.75	/	1.00	22.79	23.78	23.75	33.01	PASS
		39	21.76	22.28	22.67	/	1.00	22.76	23.28	23.67	33.01	PASS
75	0	21.83	22.58	22.77	/	1.00	22.83	23.58	23.77	33.01	PASS	
16QAM	1	0	22.39	22.34	22.17	/	1.00	23.39	23.34	23.17	33.01	PASS
		38	21.65	22.66	22.57	/	1.00	22.65	23.66	23.57	33.01	PASS
		74	22.13	21.88	21.89	/	1.00	23.13	22.88	22.89	33.01	PASS
	36	0	20.96	21.83	21.59	/	1.00	21.96	22.83	22.59	33.01	PASS
		18	20.96	21.62	21.71	/	1.00	21.96	22.62	22.71	33.01	PASS
		39	21.04	21.11	21.66	/	1.00	22.04	22.11	22.66	33.01	PASS
75	0	21.06	21.61	21.71	/	1.00	22.06	22.61	22.71	33.01	PASS	



Test Band: 2_ 20MHz Bandwidth													
Modulation	RB Allocation		Conducted Power (dBm)			Antenna gain		EIRP(dBm)			Limit (dBm)	Verdict	
	Size	Offset	LCH	MCH	HCH	(dBd)	(dBi)	LCH	MCH	HCH			
QPSK	1	0	22.92	24.01	22.78	/	1.00	23.92	25.01	23.78	33.01	PASS	
		50	23.59	23.96	23.78	/	1.00	24.59	24.96	24.78	33.01	PASS	
		99	23.73	22.79	22.52	/	1.00	24.73	23.79	23.52	33.01	PASS	
	50	0	21.76	23.03	22.34	/	1.00	22.76	24.03	23.34	33.01	PASS	
		25	21.92	22.86	22.71	/	1.00	22.92	23.86	23.71	33.01	PASS	
		50	22.20	22.22	22.73	/	1.00	23.20	23.22	23.73	33.01	PASS	
	100	0	21.96	22.64	22.65	/	1.00	22.96	23.64	23.65	33.01	PASS	
	16QAM	1	0	22.11	22.84	22.11	/	1.00	23.11	23.84	23.11	33.01	PASS
			50	22.97	22.64	23.22	/	1.00	23.97	23.64	24.22	33.01	PASS
99			23.17	21.55	21.79	/	1.00	24.17	22.55	22.79	33.01	PASS	
50		0	20.69	22.19	21.50	/	1.00	21.69	23.19	22.50	33.01	PASS	
		25	20.95	21.84	21.80	/	1.00	21.95	22.84	22.80	33.01	PASS	
		50	21.14	21.28	21.79	/	1.00	22.14	22.28	22.79	33.01	PASS	
100		0	21.08	21.78	21.58	/	1.00	22.08	22.78	22.58	33.01	PASS	

Test Band: 4_ 1.4MHz Bandwidth													
Modulation	RB Allocation		Conducted Power (dBm)			Antenna gain		EIRP(dBm)			Limit (dBm)	Verdict	
	Size	Offset	LCH	MCH	HCH	(dBd)	(dBi)	LCH	MCH	HCH			
QPSK	1	0	22.85	23.10	23.71	/	1.00	23.85	24.10	24.71	30.00	PASS	
		2	22.84	23.07	23.82	/	1.00	23.84	24.07	24.82	30.00	PASS	
		5	22.76	22.76	23.70	/	1.00	23.76	23.76	24.70	30.00	PASS	
	3	0	22.69	22.85	23.73	/	1.00	23.69	23.85	24.73	30.00	PASS	
		2	22.75	22.92	24.02	/	1.00	23.75	23.92	25.02	30.00	PASS	
		3	22.72	22.74	23.78	/	1.00	23.72	23.74	24.78	30.00	PASS	
	6	0	21.83	21.88	22.75	/	1.00	22.83	22.88	23.75	30.00	PASS	
	16QAM	1	0	21.18	22.36	22.63	/	1.00	22.18	23.36	23.63	30.00	PASS
			2	21.42	22.42	22.80	/	1.00	22.42	23.42	23.80	30.00	PASS
5			21.33	22.16	22.57	/	1.00	22.33	23.16	23.57	30.00	PASS	
3		0	21.41	21.84	22.60	/	1.00	22.41	22.84	23.60	30.00	PASS	
		2	21.38	21.72	22.61	/	1.00	22.38	22.72	23.61	30.00	PASS	
		3	21.44	21.64	22.63	/	1.00	22.44	22.64	23.63	30.00	PASS	
6		0	20.61	21.00	21.75	/	1.00	21.61	22.00	22.75	30.00	PASS	



Test Band: 4_ 3MHz Bandwidth												
Modulation	RB Allocation		Conducted Power (dBm)			Antenna gain		EIRP(dBm)			Limit (dBm)	Verdict
	Size	Offset	LCH	MCH	HCH	(dBd)	(dBi)	LCH	MCH	HCH		
QPSK	1	0	22.59	22.91	23.37	/	1.00	23.59	23.91	24.37	30.00	PASS
		7	22.70	22.91	23.41	/	1.00	23.70	23.91	24.41	30.00	PASS
		14	22.80	22.90	23.33	/	1.00	23.80	23.90	24.33	30.00	PASS
	8	0	21.66	21.63	22.48	/	1.00	22.66	22.63	23.48	30.00	PASS
		4	21.78	21.55	22.48	/	1.00	22.78	22.55	23.48	30.00	PASS
		7	21.71	21.48	22.42	/	1.00	22.71	22.48	23.42	30.00	PASS
15	0	21.63	21.52	22.44	/	1.00	22.63	22.52	23.44	30.00	PASS	
16QAM	1	0	21.54	22.07	22.11	/	1.00	22.54	23.07	23.11	30.00	PASS
		7	21.55	22.09	22.56	/	1.00	22.55	23.09	23.56	30.00	PASS
		14	21.91	22.00	22.50	/	1.00	22.91	23.00	23.50	30.00	PASS
	8	0	20.86	21.09	21.51	/	1.00	21.86	22.09	22.51	30.00	PASS
		4	20.98	20.94	21.53	/	1.00	21.98	21.94	22.53	30.00	PASS
		7	21.04	20.95	21.47	/	1.00	22.04	21.95	22.47	30.00	PASS
15	0	20.68	20.63	21.64	/	1.00	21.68	21.63	22.64	30.00	PASS	

Test Band: 4_ 5MHz Bandwidth												
Modulation	RB Allocation		Conducted Power (dBm)			Antenna gain		EIRP(dBm)			Limit (dBm)	Verdict
	Size	Offset	LCH	MCH	HCH	(dBd)	(dBi)	LCH	MCH	HCH		
QPSK	1	0	22.54	22.76	23.45	/	1.00	23.54	23.76	24.45	30.00	PASS
		13	22.80	22.43	23.56	/	1.00	23.80	23.43	24.56	30.00	PASS
		24	23.07	22.37	23.65	/	1.00	24.07	23.37	24.65	30.00	PASS
	12	0	21.64	21.71	22.42	/	1.00	22.64	22.71	23.42	30.00	PASS
		6	21.70	21.58	22.48	/	1.00	22.70	22.58	23.48	30.00	PASS
		13	21.85	21.46	22.58	/	1.00	22.85	22.46	23.58	30.00	PASS
25	0	21.72	21.57	22.54	/	1.00	22.72	22.57	23.54	30.00	PASS	
16QAM	1	0	21.61	21.38	22.36	/	1.00	22.61	22.38	23.36	30.00	PASS
		13	21.80	21.16	22.67	/	1.00	22.80	22.16	23.67	30.00	PASS
		24	22.19	21.15	22.57	/	1.00	23.19	22.15	23.57	30.00	PASS
	12	0	20.61	20.61	21.61	/	1.00	21.61	21.61	22.61	30.00	PASS
		6	20.73	20.56	21.60	/	1.00	21.73	21.56	22.60	30.00	PASS
		13	20.86	20.35	21.61	/	1.00	21.86	21.35	22.61	30.00	PASS
25	0	20.77	20.68	21.54	/	1.00	21.77	21.68	22.54	30.00	PASS	



Test Band: 4 _ 10MHz Bandwidth												
Modulation	RB Allocation		Conducted Power (dBm)			Antenna gain		EIRP(dBm)			Limit (dBm)	Verdict
	Size	Offset	LCH	MCH	HCH	(dBd)	(dBi)	LCH	MCH	HCH		
QPSK	1	0	22.63	23.13	22.79	/	1.00	23.63	24.13	23.79	30.00	PASS
		25	23.21	22.67	23.58	/	1.00	24.21	23.67	24.58	30.00	PASS
		49	23.38	22.42	23.50	/	1.00	24.38	23.42	24.50	30.00	PASS
	25	0	21.81	21.67	22.21	/	1.00	22.81	22.67	23.21	30.00	PASS
		13	22.13	21.50	22.41	/	1.00	23.13	22.50	23.41	30.00	PASS
		25	22.19	21.27	22.42	/	1.00	23.19	22.27	23.42	30.00	PASS
50	0	21.99	21.56	22.29	/	1.00	22.99	22.56	23.29	30.00	PASS	
16QAM	1	0	21.52	22.00	21.79	/	1.00	22.52	23.00	22.79	30.00	PASS
		25	21.87	21.82	22.65	/	1.00	22.87	22.82	23.65	30.00	PASS
		49	21.87	21.60	22.35	/	1.00	22.87	22.60	23.35	30.00	PASS
	25	0	20.77	21.01	21.27	/	1.00	21.77	22.01	22.27	30.00	PASS
		13	21.27	20.84	21.45	/	1.00	22.27	21.84	22.45	30.00	PASS
		25	21.34	20.61	21.44	/	1.00	22.34	21.61	22.44	30.00	PASS
50	0	21.13	20.78	21.31	/	1.00	22.13	21.78	22.31	30.00	PASS	

Test Band: 4 _ 15MHz Bandwidth												
Modulation	RB Allocation		Conducted Power (dBm)			Antenna gain		EIRP(dBm)			Limit (dBm)	Verdict
	Size	Offset	LCH	MCH	HCH	(dBd)	(dBi)	LCH	MCH	HCH		
QPSK	1	0	22.49	23.21	22.62	/	1.00	23.49	24.21	23.62	30.00	PASS
		38	23.14	22.63	23.34	/	1.00	24.14	23.63	24.34	30.00	PASS
		74	23.10	22.55	23.42	/	1.00	24.10	23.55	24.42	30.00	PASS
	36	0	21.95	21.85	21.76	/	1.00	22.95	22.85	22.76	30.00	PASS
		18	22.17	21.58	22.19	/	1.00	23.17	22.58	23.19	30.00	PASS
		39	22.26	21.30	22.33	/	1.00	23.26	22.30	23.33	30.00	PASS
75	0	22.08	21.57	22.09	/	1.00	23.08	22.57	23.09	30.00	PASS	
16QAM	1	0	21.52	22.40	21.26	/	1.00	22.52	23.40	22.26	30.00	PASS
		38	22.12	21.61	22.15	/	1.00	23.12	22.61	23.15	30.00	PASS
		74	22.09	21.50	21.94	/	1.00	23.09	22.50	22.94	30.00	PASS
	36	0	20.97	20.96	20.79	/	1.00	21.97	21.96	21.79	30.00	PASS
		18	21.27	20.79	21.16	/	1.00	22.27	21.79	22.16	30.00	PASS
		39	21.27	20.30	21.22	/	1.00	22.27	21.30	22.22	30.00	PASS
75	0	21.12	20.62	21.03	/	1.00	22.12	21.62	22.03	30.00	PASS	



Test Band: 4_ 20MHz Bandwidth													
Modulation	RB Allocation		Conducted Power (dBm)			Antenna gain		EIRP(dBm)			Limit (dBm)	Verdict	
	Size	Offset	LCH	MCH	HCH	(dBd)	(dBi)	LCH	MCH	HCH			
QPSK	1	0	22.66	23.46	22.33	/	1.00	23.66	24.46	23.33	30.00	PASS	
		50	23.64	22.73	22.97	/	1.00	24.64	23.73	23.97	30.00	PASS	
		99	22.78	22.73	23.46	/	1.00	23.78	23.73	24.46	30.00	PASS	
	50	0	22.09	21.77	21.51	/	1.00	23.09	22.77	22.51	30.00	PASS	
		25	22.28	21.52	21.84	/	1.00	23.28	22.52	22.84	30.00	PASS	
		50	22.16	21.32	22.13	/	1.00	23.16	22.32	23.13	30.00	PASS	
	100	0	22.11	21.50	21.91	/	1.00	23.11	22.50	22.91	30.00	PASS	
	16QAM	1	0	21.76	22.22	21.09	/	1.00	22.76	23.22	22.09	30.00	PASS
			50	22.85	21.36	22.31	/	1.00	23.85	22.36	23.31	30.00	PASS
99			22.23	21.29	22.86	/	1.00	23.23	22.29	23.86	30.00	PASS	
50		0	21.14	20.87	20.61	/	1.00	22.14	21.87	21.61	30.00	PASS	
		25	21.34	20.62	20.99	/	1.00	22.34	21.62	21.99	30.00	PASS	
		50	21.10	20.31	21.16	/	1.00	22.10	21.31	22.16	30.00	PASS	
100		0	21.07	20.65	20.86	/	1.00	22.07	21.65	21.86	30.00	PASS	

Test Band: 5_ 1.4MHz Bandwidth													
Modulation	RB Allocation		Conducted Power (dBm)			Antenna gain		ERP(dBm)			Limit (dBm)	Verdict	
	Size	Offset	LCH	MCH	HCH	(dBd)	(dBi)	LCH	MCH	HCH			
QPSK	1	0	23.33	23.55	23.80	-1.15	1.00	22.18	22.40	22.65	38.45	PASS	
		2	23.33	23.63	23.80	-1.15	1.00	22.18	22.48	22.65	38.45	PASS	
		5	23.18	23.56	23.72	-1.15	1.00	22.03	22.41	22.57	38.45	PASS	
	3	0	23.36	23.58	23.97	-1.15	1.00	22.21	22.43	22.82	38.45	PASS	
		2	23.29	23.65	24.06	-1.15	1.00	22.14	22.50	22.91	38.45	PASS	
		3	23.27	23.62	24.00	-1.15	1.00	22.12	22.47	22.85	38.45	PASS	
	6	0	22.32	22.69	23.10	-1.15	1.00	21.17	21.54	21.95	38.45	PASS	
	16QAM	1	0	22.44	23.04	22.74	-1.15	1.00	21.29	21.89	21.59	38.45	PASS
			2	22.53	23.36	22.90	-1.15	1.00	21.38	22.21	21.75	38.45	PASS
5			22.44	23.12	22.68	-1.15	1.00	21.29	21.97	21.53	38.45	PASS	
3		0	22.16	22.55	22.87	-1.15	1.00	21.01	21.40	21.72	38.45	PASS	
		2	22.23	22.53	22.86	-1.15	1.00	21.08	21.38	21.71	38.45	PASS	
		3	21.95	22.51	22.96	-1.15	1.00	20.80	21.36	21.81	38.45	PASS	
6		0	21.16	21.72	21.99	-1.15	1.00	20.01	20.57	20.84	38.45	PASS	



Test Band: 5_ 3MHz Bandwidth													
Modulation	RB Allocation		Conducted Power (dBm)			Antenna gain		ERP(dBm)			Limit (dBm)	Verdict	
	Size	Offset	LCH	MCH	HCH	(dBd)	(dBi)	LCH	MCH	HCH			
QPSK	1	0	23.23	23.47	24.13	-1.15	1.00	22.08	22.32	22.98	38.45	PASS	
		7	23.12	23.85	24.02	-1.15	1.00	21.97	22.70	22.87	38.45	PASS	
		14	23.03	23.73	23.81	-1.15	1.00	21.88	22.58	22.66	38.45	PASS	
	8	0	22.31	22.52	23.15	-1.15	1.00	21.16	21.37	22.00	38.45	PASS	
		4	22.16	22.57	23.11	-1.15	1.00	21.01	21.42	21.96	38.45	PASS	
		7	22.15	22.71	23.00	-1.15	1.00	21.00	21.56	21.85	38.45	PASS	
	15	0	22.14	22.60	23.07	-1.15	1.00	20.99	21.45	21.92	38.45	PASS	
	16QAM	1	0	22.09	22.78	22.56	-1.15	1.00	20.94	21.63	21.41	38.45	PASS
			7	21.91	23.02	22.88	-1.15	1.00	20.76	21.87	21.73	38.45	PASS
14			21.86	23.13	22.68	-1.15	1.00	20.71	21.98	21.53	38.45	PASS	
8		0	21.08	21.65	21.79	-1.15	1.00	19.93	20.50	20.64	38.45	PASS	
		4	20.92	21.73	21.77	-1.15	1.00	19.77	20.58	20.62	38.45	PASS	
		7	20.82	21.85	21.67	-1.15	1.00	19.67	20.70	20.52	38.45	PASS	
15		0	20.92	21.37	21.84	-1.15	1.00	19.77	20.22	20.69	38.45	PASS	

Test Band: 5_ 5MHz Bandwidth													
Modulation	RB Allocation		Conducted Power (dBm)			Antenna gain		ERP(dBm)			Limit (dBm)	Verdict	
	Size	Offset	LCH	MCH	HCH	(dBd)	(dBi)	LCH	MCH	HCH			
QPSK	1	0	23.32	23.35	24.05	-1.15	1.00	22.17	22.20	22.90	38.45	PASS	
		13	23.23	23.57	24.06	-1.15	1.00	22.08	22.42	22.91	38.45	PASS	
		24	23.13	23.53	23.79	-1.15	1.00	21.98	22.38	22.64	38.45	PASS	
	12	0	22.22	22.50	23.20	-1.15	1.00	21.07	21.35	22.05	38.45	PASS	
		6	22.27	22.54	23.16	-1.15	1.00	21.12	21.39	22.01	38.45	PASS	
		13	22.32	22.63	23.06	-1.15	1.00	21.17	21.48	21.91	38.45	PASS	
	25	0	22.27	22.57	23.03	-1.15	1.00	21.12	21.42	21.88	38.45	PASS	
	16QAM	1	0	21.88	22.34	22.63	-1.15	1.00	20.73	21.19	21.48	38.45	PASS
			13	21.93	22.67	22.75	-1.15	1.00	20.78	21.52	21.60	38.45	PASS
24			21.93	22.71	22.68	-1.15	1.00	20.78	21.56	21.53	38.45	PASS	
12		0	20.92	21.37	21.94	-1.15	1.00	19.77	20.22	20.79	38.45	PASS	
		6	20.96	21.42	21.74	-1.15	1.00	19.81	20.27	20.59	38.45	PASS	
		13	21.09	21.31	21.60	-1.15	1.00	19.94	20.16	20.45	38.45	PASS	
25		0	21.08	21.57	21.86	-1.15	1.00	19.93	20.42	20.71	38.45	PASS	



Test Band: 5_ 10MHz Bandwidth												
Modulation	RB Allocation		Conducted Power (dBm)			Antenna gain		ERP(dBm)			Limit (dBm)	Verdict
	Size	Offset	LCH	MCH	HCH	(dBd)	(dBi)	LCH	MCH	HCH		
QPSK	1	0	23.25	23.21	24.00	-1.15	1.00	22.10	22.06	22.85	38.45	PASS
		25	23.44	23.65	24.28	-1.15	1.00	22.29	22.50	23.13	38.45	PASS
		49	23.51	23.85	23.98	-1.15	1.00	22.36	22.70	22.83	38.45	PASS
	25	0	22.20	22.40	23.03	-1.15	1.00	21.05	21.25	21.88	38.45	PASS
		13	22.26	22.55	23.14	-1.15	1.00	21.11	21.40	21.99	38.45	PASS
		25	22.25	22.71	23.06	-1.15	1.00	21.10	21.56	21.91	38.45	PASS
50	0	22.23	22.65	23.05	-1.15	1.00	21.08	21.50	21.90	38.45	PASS	
16QAM	1	0	22.35	22.29	22.77	-1.15	1.00	21.20	21.14	21.62	38.45	PASS
		25	22.25	22.67	23.11	-1.15	1.00	21.10	21.52	21.96	38.45	PASS
		49	22.21	23.19	22.74	-1.15	1.00	21.06	22.04	21.59	38.45	PASS
	25	0	21.26	21.36	21.87	-1.15	1.00	20.11	20.21	20.72	38.45	PASS
		13	21.28	21.42	22.04	-1.15	1.00	20.13	20.27	20.89	38.45	PASS
		25	21.19	21.58	21.96	-1.15	1.00	20.04	20.43	20.81	38.45	PASS
50	0	21.06	21.70	21.78	-1.15	1.00	19.91	20.55	20.63	38.45	PASS	

Test Band: 12_ 1.4MHz Bandwidth												
Modulation	RB Allocation		Conducted Power (dBm)			Antenna gain		ERP(dBm)			Limit (dBm)	Verdict
	Size	Offset	LCH	MCH	HCH	(dBd)	(dBi)	LCH	MCH	HCH		
QPSK	1	0	23.93	23.45	23.68	-1.15	1.00	22.78	22.30	22.53	34.77	PASS
		2	24.01	23.67	23.90	-1.15	1.00	22.86	22.52	22.75	34.77	PASS
		5	23.72	23.39	23.98	-1.15	1.00	22.57	22.24	22.83	34.77	PASS
	3	0	23.84	23.25	23.71	-1.15	1.00	22.69	22.10	22.56	34.77	PASS
		2	23.96	23.29	23.75	-1.15	1.00	22.81	22.14	22.60	34.77	PASS
		3	23.86	23.16	23.74	-1.15	1.00	22.71	22.01	22.59	34.77	PASS
6	0	22.81	22.22	22.68	-1.15	1.00	21.66	21.07	21.53	34.77	PASS	
16QAM	1	0	22.84	22.42	22.40	-1.15	1.00	21.69	21.27	21.25	34.77	PASS
		2	22.85	22.57	22.72	-1.15	1.00	21.70	21.42	21.57	34.77	PASS
		5	22.73	22.49	22.89	-1.15	1.00	21.58	21.34	21.74	34.77	PASS
	3	0	22.69	22.35	22.13	-1.15	1.00	21.54	21.20	20.98	34.77	PASS
		2	22.80	22.31	22.44	-1.15	1.00	21.65	21.16	21.29	34.77	PASS
		3	22.78	22.34	22.43	-1.15	1.00	21.63	21.19	21.28	34.77	PASS
6	0	21.55	21.35	21.84	-1.15	1.00	20.40	20.20	20.69	34.77	PASS	



Test Band: 12 3MHz Bandwidth												
Modulation	RB Allocation		Conducted Power (dBm)			Antenna gain		ERP(dBm)			Limit (dBm)	Verdict
	Size	Offset	LCH	MCH	HCH	(dBd)	(dBi)	LCH	MCH	HCH		
QPSK	1	0	23.96	23.30	23.35	-1.15	1.00	22.81	22.15	22.20	34.77	PASS
		7	23.80	23.28	23.37	-1.15	1.00	22.65	22.13	22.22	34.77	PASS
		14	23.61	23.22	23.68	-1.15	1.00	22.46	22.07	22.53	34.77	PASS
	8	0	22.86	22.37	22.42	-1.15	1.00	21.71	21.22	21.27	34.77	PASS
		4	22.86	22.31	22.63	-1.15	1.00	21.71	21.16	21.48	34.77	PASS
		7	22.79	22.25	22.64	-1.15	1.00	21.64	21.10	21.49	34.77	PASS
15	0	22.87	22.09	22.49	-1.15	1.00	21.72	20.94	21.34	34.77	PASS	
16QAM	1	0	23.02	22.23	22.10	-1.15	1.00	21.87	21.08	20.95	34.77	PASS
		7	22.86	22.20	22.45	-1.15	1.00	21.71	21.05	21.30	34.77	PASS
		14	22.56	22.05	23.21	-1.15	1.00	21.41	20.90	22.06	34.77	PASS
	8	0	21.84	21.24	21.43	-1.15	1.00	20.69	20.09	20.28	34.77	PASS
		4	21.76	21.51	21.56	-1.15	1.00	20.61	20.36	20.41	34.77	PASS
		7	21.70	21.49	21.58	-1.15	1.00	20.55	20.34	20.43	34.77	PASS
15	0	21.93	21.07	21.63	-1.15	1.00	20.78	19.92	20.48	34.77	PASS	

Test Band: 12 5MHz Bandwidth												
Modulation	RB Allocation		Conducted Power (dBm)			Antenna gain		ERP(dBm)			Limit (dBm)	Verdict
	Size	Offset	LCH	MCH	HCH	(dBd)	(dBi)	LCH	MCH	HCH		
QPSK	1	0	23.84	23.13	23.15	-1.15	1.00	22.69	21.98	22.00	34.77	PASS
		13	23.58	23.25	23.34	-1.15	1.00	22.43	22.10	22.19	34.77	PASS
		24	23.28	22.94	23.65	-1.15	1.00	22.13	21.79	22.50	34.77	PASS
	12	0	22.87	22.15	22.22	-1.15	1.00	21.72	21.00	21.07	34.77	PASS
		6	22.52	22.13	22.37	-1.15	1.00	21.37	20.98	21.22	34.77	PASS
		13	22.34	22.09	22.59	-1.15	1.00	21.19	20.94	21.44	34.77	PASS
25	0	22.67	22.20	22.35	-1.15	1.00	21.52	21.05	21.20	34.77	PASS	
16QAM	1	0	22.96	22.48	21.80	-1.15	1.00	21.81	21.33	20.65	34.77	PASS
		13	22.44	22.49	21.93	-1.15	1.00	21.29	21.34	20.78	34.77	PASS
		24	22.44	22.42	22.33	-1.15	1.00	21.29	21.27	21.18	34.77	PASS
	12	0	21.95	21.02	20.89	-1.15	1.00	20.80	19.87	19.74	34.77	PASS
		6	21.69	20.91	21.16	-1.15	1.00	20.54	19.76	20.01	34.77	PASS
		13	21.59	20.97	21.51	-1.15	1.00	20.44	19.82	20.36	34.77	PASS
25	0	21.65	21.20	21.43	-1.15	1.00	20.50	20.05	20.28	34.77	PASS	



Test Band: 12_ 10MHz Bandwidth												
Modulation	RB Allocation		Conducted Power (dBm)			Antenna gain		ERP(dBm)			Limit (dBm)	Verdict
	Size	Offset	LCH	MCH	HCH	(dBd)	(dBi)	LCH	MCH	HCH		
QPSK	1	0	23.81	23.24	23.19	-1.15	1.00	22.66	22.09	22.04	34.77	PASS
		25	23.16	23.24	23.15	-1.15	1.00	22.01	22.09	22.00	34.77	PASS
		49	22.88	22.98	23.48	-1.15	1.00	21.73	21.83	22.33	34.77	PASS
	25	0	22.59	22.20	22.24	-1.15	1.00	21.44	21.05	21.09	34.77	PASS
		13	22.23	22.19	22.10	-1.15	1.00	21.08	21.04	20.95	34.77	PASS
		25	22.24	22.19	22.24	-1.15	1.00	21.09	21.04	21.09	34.77	PASS
50	0	22.47	22.19	22.24	-1.15	1.00	21.32	21.04	21.09	34.77	PASS	
16QAM	1	0	22.90	22.56	22.18	-1.15	1.00	21.75	21.41	21.03	34.77	PASS
		25	22.29	22.87	22.46	-1.15	1.00	21.14	21.72	21.31	34.77	PASS
		49	22.18	22.52	23.05	-1.15	1.00	21.03	21.37	21.90	34.77	PASS
	25	0	21.64	21.33	21.15	-1.15	1.00	20.49	20.18	20.00	34.77	PASS
		13	21.28	21.25	21.20	-1.15	1.00	20.13	20.10	20.05	34.77	PASS
		25	21.21	21.33	21.33	-1.15	1.00	20.06	20.18	20.18	34.77	PASS
50	0	21.40	21.22	21.33	-1.15	1.00	20.25	20.07	20.18	34.77	PASS	

Test Band: 13_ 5MHz Bandwidth												
Modulation	RB Allocation		Conducted Power (dBm)			Antenna gain		ERP(dBm)			Limit (dBm)	Verdict
	Size	Offset	LCH	MCH	HCH	(dBd)	(dBi)	LCH	MCH	HCH		
QPSK	1	0	24.32	24.38	24.47	-1.15	1.00	23.17	23.23	23.32	34.77	PASS
		13	24.43	24.53	24.31	-1.15	1.00	23.28	23.38	23.16	34.77	PASS
		24	24.32	24.74	24.59	-1.15	1.00	23.17	23.59	23.44	34.77	PASS
	12	0	23.33	23.56	23.52	-1.15	1.00	22.18	22.41	22.37	34.77	PASS
		6	23.39	23.51	23.50	-1.15	1.00	22.24	22.36	22.35	34.77	PASS
		13	23.56	23.63	23.50	-1.15	1.00	22.41	22.48	22.35	34.77	PASS
25	0	23.51	23.55	23.56	-1.15	1.00	22.36	22.40	22.41	34.77	PASS	
16QAM	1	0	23.13	23.48	23.25	-1.15	1.00	21.98	22.33	22.10	34.77	PASS
		13	23.28	23.26	22.98	-1.15	1.00	22.13	22.11	21.83	34.77	PASS
		24	23.49	23.75	23.05	-1.15	1.00	22.34	22.60	21.90	34.77	PASS
	12	0	22.29	22.53	22.35	-1.15	1.00	21.14	21.38	21.20	34.77	PASS
		6	22.28	22.49	22.36	-1.15	1.00	21.13	21.34	21.21	34.77	PASS
		13	22.35	22.40	22.45	-1.15	1.00	21.20	21.25	21.30	34.77	PASS
25	0	22.12	22.53	22.39	-1.15	1.00	20.97	21.38	21.24	34.77	PASS	



Test Band: 13 10MHz Bandwidth												
Modulation	RB Allocation		Conducted Power (dBm)			Antenna gain		ERP(dBm)			Limit (dBm)	Verdict
	Size	Offset	LCH	MCH	HCH	(dBd)	(dBi)	LCH	MCH	HCH		
QPSK	1	0	/	24.03	/	-1.15	1.00	/	22.88	/	34.77	PASS
		25	/	24.23	/	-1.15	1.00	/	23.08	/	34.77	PASS
		49	/	24.21	/	-1.15	1.00	/	23.06	/	34.77	PASS
	25	0	/	23.29	/	-1.15	1.00	/	22.14	/	34.77	PASS
		13	/	23.30	/	-1.15	1.00	/	22.15	/	34.77	PASS
		25	/	23.22	/	-1.15	1.00	/	22.07	/	34.77	PASS
50	0	/	23.25	/	-1.15	1.00	/	22.10	/	34.77	PASS	
16QAM	1	0	/	23.07	/	-1.15	1.00	/	21.92	/	34.77	PASS
		25	/	23.57	/	-1.15	1.00	/	22.42	/	34.77	PASS
		49	/	23.30	/	-1.15	1.00	/	22.15	/	34.77	PASS
	25	0	/	22.23	/	-1.15	1.00	/	21.08	/	34.77	PASS
		13	/	22.14	/	-1.15	1.00	/	20.99	/	34.77	PASS
		25	/	22.08	/	-1.15	1.00	/	20.93	/	34.77	PASS
	50	0	/	22.17	/	-1.15	1.00	/	21.02	/	34.77	PASS

Test Band: 14 5MHz Bandwidth												
Modulation	RB Allocation		Conducted Power (dBm)			Antenna gain		ERP(dBm)			Limit (dBm)	Verdict
	Size	Offset	LCH	MCH	HCH	(dBd)	(dBi)	LCH	MCH	HCH		
QPSK	1	0	23.86	23.90	23.52	-1.15	1.00	22.71	22.75	22.37	34.77	PASS
		13	23.73	23.52	23.05	-1.15	1.00	22.58	22.37	21.90	34.77	PASS
		24	23.53	23.47	23.29	-1.15	1.00	22.38	22.32	22.14	34.77	PASS
	12	0	23.07	22.73	22.43	-1.15	1.00	21.92	21.58	21.28	34.77	PASS
		6	22.93	22.69	22.31	-1.15	1.00	21.78	21.54	21.16	34.77	PASS
		13	22.78	22.63	22.16	-1.15	1.00	21.63	21.48	21.01	34.77	PASS
25	0	22.92	22.69	22.44	-1.15	1.00	21.77	21.54	21.29	34.77	PASS	
16QAM	1	0	22.98	22.84	21.99	-1.15	1.00	21.83	21.69	20.84	34.77	PASS
		13	22.64	22.59	21.64	-1.15	1.00	21.49	21.44	20.49	34.77	PASS
		24	22.41	22.52	21.52	-1.15	1.00	21.26	21.37	20.37	34.77	PASS
	12	0	21.79	21.61	21.33	-1.15	1.00	20.64	20.46	20.18	34.77	PASS
		6	21.66	21.53	21.17	-1.15	1.00	20.51	20.38	20.02	34.77	PASS
		13	21.50	21.46	21.21	-1.15	1.00	20.35	20.31	20.06	34.77	PASS
	25	0	21.76	21.70	21.36	-1.15	1.00	20.61	20.55	20.21	34.77	PASS



Test Band: 14 _ 10MHz Bandwidth												
Modulation	RB Allocation		Conducted Power (dBm)			Antenna gain		ERP(dBm)			Limit (dBm)	Verdict
	Size	Offset	LCH	MCH	HCH	(dBd)	(dBi)	LCH	MCH	HCH		
QPSK	1	0	/	24.07	/	-1.15	1.00	/	22.92	/	34.77	PASS
		25	/	23.51	/	-1.15	1.00	/	22.36	/	34.77	PASS
		49	/	22.81	/	-1.15	1.00	/	21.66	/	34.77	PASS
	25	0	/	22.89	/	-1.15	1.00	/	21.74	/	34.77	PASS
		13	/	22.40	/	-1.15	1.00	/	21.25	/	34.77	PASS
		25	/	22.29	/	-1.15	1.00	/	21.14	/	34.77	PASS
50	0	/	22.62	/	-1.15	1.00	/	21.47	/	34.77	PASS	
16QAM	1	0	/	23.09	/	-1.15	1.00	/	21.94	/	34.77	PASS
		25	/	22.72	/	-1.15	1.00	/	21.57	/	34.77	PASS
		49	/	22.03	/	-1.15	1.00	/	20.88	/	34.77	PASS
	25	0	/	21.84	/	-1.15	1.00	/	20.69	/	34.77	PASS
		13	/	21.47	/	-1.15	1.00	/	20.32	/	34.77	PASS
		25	/	21.35	/	-1.15	1.00	/	20.20	/	34.77	PASS
	50	0	/	21.60	/	-1.15	1.00	/	20.45	/	34.77	PASS

Test Band: 66 _ 1.4MHz Bandwidth												
Modulation	RB Allocation		Conducted Power (dBm)			Antenna gain		EIRP(dBm)			Limit (dBm)	Verdict
	Size	Offset	LCH	MCH	HCH	(dBd)	(dBi)	LCH	MCH	HCH		
QPSK	1	0	22.72	23.12	23.80	/	1.00	23.72	24.12	24.80	30.00	PASS
		2	22.94	23.10	23.81	/	1.00	23.94	24.10	24.81	30.00	PASS
		5	22.84	23.15	23.92	/	1.00	23.84	24.15	24.92	30.00	PASS
	3	0	22.80	23.33	23.95	/	1.00	23.80	24.33	24.95	30.00	PASS
		2	22.90	23.21	24.02	/	1.00	23.90	24.21	25.02	30.00	PASS
		3	22.88	23.21	23.86	/	1.00	23.88	24.21	24.86	30.00	PASS
6	0	21.90	22.17	22.96	/	1.00	22.90	23.17	23.96	30.00	PASS	
16QAM	1	0	21.60	22.32	22.52	/	1.00	22.60	23.32	23.52	30.00	PASS
		2	21.52	22.61	22.80	/	1.00	22.52	23.61	23.80	30.00	PASS
		5	21.41	22.29	22.58	/	1.00	22.41	23.29	23.58	30.00	PASS
	3	0	21.85	21.85	22.60	/	1.00	22.85	22.85	23.60	30.00	PASS
		2	21.90	21.90	22.21	/	1.00	22.90	22.90	23.21	30.00	PASS
		3	21.87	21.87	22.15	/	1.00	22.87	22.87	23.15	30.00	PASS
	6	0	20.96	21.09	21.67	/	1.00	21.96	22.09	22.67	30.00	PASS



Test Band: 66 3MHz Bandwidth													
Modulation	RB Allocation		Conducted Power (dBm)			Antenna gain		EIRP(dBm)			Limit (dBm)	Verdict	
	Size	Offset	LCH	MCH	HCH	(dBd)	(dBi)	LCH	MCH	HCH			
QPSK	1	0	22.78	23.14	23.55	/	1.00	23.78	24.14	24.55	30.00	PASS	
		7	22.88	23.34	23.59	/	1.00	23.88	24.34	24.59	30.00	PASS	
		14	23.08	23.44	23.68	/	1.00	24.08	24.44	24.68	30.00	PASS	
	8	0	21.82	22.21	22.79	/	1.00	22.82	23.21	23.79	30.00	PASS	
		4	21.86	22.16	22.77	/	1.00	22.86	23.16	23.77	30.00	PASS	
		7	22.08	22.22	22.77	/	1.00	23.08	23.22	23.77	30.00	PASS	
	15	0	22.00	22.18	22.82	/	1.00	23.00	23.18	23.82	30.00	PASS	
	16QAM	1	0	21.55	22.14	22.44	/	1.00	22.55	23.14	23.44	30.00	PASS
			7	21.65	22.42	22.69	/	1.00	22.65	23.42	23.69	30.00	PASS
14			21.76	23.01	22.51	/	1.00	22.76	24.01	23.51	30.00	PASS	
8		0	20.72	21.64	21.51	/	1.00	21.72	22.64	22.51	30.00	PASS	
		4	20.72	21.40	21.55	/	1.00	21.72	22.40	22.55	30.00	PASS	
		7	20.78	21.45	21.56	/	1.00	21.78	22.45	22.56	30.00	PASS	
15		0	20.71	21.35	21.74	/	1.00	21.71	22.35	22.74	30.00	PASS	

Test Band: 66 5MHz Bandwidth													
Modulation	RB Allocation		Conducted Power (dBm)			Antenna gain		EIRP(dBm)			Limit (dBm)	Verdict	
	Size	Offset	LCH	MCH	HCH	(dBd)	(dBi)	LCH	MCH	HCH			
QPSK	1	0	22.85	22.92	23.34	/	1.00	23.85	23.92	24.34	30.00	PASS	
		13	23.06	23.12	23.56	/	1.00	24.06	24.12	24.56	30.00	PASS	
		24	23.20	23.36	23.69	/	1.00	24.20	24.36	24.69	30.00	PASS	
	12	0	21.89	22.10	22.60	/	1.00	22.89	23.10	23.60	30.00	PASS	
		6	22.01	22.16	22.58	/	1.00	23.01	23.16	23.58	30.00	PASS	
		13	22.05	22.31	22.76	/	1.00	23.05	23.31	23.76	30.00	PASS	
	25	0	22.03	22.11	22.63	/	1.00	23.03	23.11	23.63	30.00	PASS	
	16QAM	1	0	21.39	22.10	21.98	/	1.00	22.39	23.10	22.98	30.00	PASS
			13	21.65	22.33	22.19	/	1.00	22.65	23.33	23.19	30.00	PASS
24			21.85	22.50	22.23	/	1.00	22.85	23.50	23.23	30.00	PASS	
12		0	20.73	20.99	21.30	/	1.00	21.73	21.99	22.30	30.00	PASS	
		6	20.95	21.10	21.54	/	1.00	21.95	22.10	22.54	30.00	PASS	
		13	20.91	21.22	21.68	/	1.00	21.91	22.22	22.68	30.00	PASS	
25		0	21.03	21.11	21.63	/	1.00	22.03	22.11	22.63	30.00	PASS	



Test Band: 66_ 10MHz Bandwidth													
Modulation	RB Allocation		Conducted Power (dBm)			Antenna gain		EIRP(dBm)			Limit (dBm)	Verdict	
	Size	Offset	LCH	MCH	HCH	(dBd)	(dBi)	LCH	MCH	HCH			
QPSK	1	0	22.79	22.88	22.90	/	1.00	23.79	23.88	23.90	30.00	PASS	
		25	23.40	23.78	23.41	/	1.00	24.40	24.78	24.41	30.00	PASS	
		49	23.33	23.73	23.69	/	1.00	24.33	24.73	24.69	30.00	PASS	
	25	0	22.26	22.09	22.26	/	1.00	23.26	23.09	23.26	30.00	PASS	
		13	22.37	22.22	22.33	/	1.00	23.37	23.22	23.33	30.00	PASS	
		25	22.53	22.40	22.50	/	1.00	23.53	23.40	23.50	30.00	PASS	
	50	0	22.33	22.22	22.43	/	1.00	23.33	23.22	23.43	30.00	PASS	
	16QAM	1	0	21.75	22.16	21.71	/	1.00	22.75	23.16	22.71	30.00	PASS
			25	22.04	22.94	22.19	/	1.00	23.04	23.94	23.19	30.00	PASS
49			22.21	23.00	22.44	/	1.00	23.21	24.00	23.44	30.00	PASS	
25		0	21.02	21.22	21.15	/	1.00	22.02	22.22	22.15	30.00	PASS	
		13	21.16	21.39	21.28	/	1.00	22.16	22.39	22.28	30.00	PASS	
		25	21.31	21.53	21.47	/	1.00	22.31	22.53	22.47	30.00	PASS	
50		0	21.19	21.34	21.37	/	1.00	22.19	22.34	22.37	30.00	PASS	

Test Band: 66_ 15MHz Bandwidth													
Modulation	RB Allocation		Conducted Power (dBm)			Antenna gain		EIRP(dBm)			Limit (dBm)	Verdict	
	Size	Offset	LCH	MCH	HCH	(dBd)	(dBi)	LCH	MCH	HCH			
QPSK	1	0	22.82	22.80	22.85	/	1.00	23.82	23.80	23.85	30.00	PASS	
		38	23.39	23.36	23.06	/	1.00	24.39	24.36	24.06	30.00	PASS	
		74	23.42	23.76	23.63	/	1.00	24.42	24.76	24.63	30.00	PASS	
	36	0	22.29	21.95	21.95	/	1.00	23.29	22.95	22.95	30.00	PASS	
		18	22.57	22.26	22.18	/	1.00	23.57	23.26	23.18	30.00	PASS	
		39	22.60	22.47	22.36	/	1.00	23.60	23.47	23.36	30.00	PASS	
	75	0	22.42	22.23	22.24	/	1.00	23.42	23.23	23.24	30.00	PASS	
	16QAM	1	0	21.86	21.96	21.22	/	1.00	22.86	22.96	22.22	30.00	PASS
			38	22.27	23.04	21.86	/	1.00	23.27	24.04	22.86	30.00	PASS
74			21.88	22.93	22.49	/	1.00	22.88	23.93	23.49	30.00	PASS	
36		0	21.13	21.04	20.90	/	1.00	22.13	22.04	21.90	30.00	PASS	
		18	21.54	21.37	21.24	/	1.00	22.54	22.37	22.24	30.00	PASS	
		39	21.51	21.50	21.38	/	1.00	22.51	22.50	22.38	30.00	PASS	
75	0	21.38	21.20	21.13	/	1.00	22.38	22.20	22.13	30.00	PASS		



Test Band: 66_ 20MHz Bandwidth												
Modulation	RB Allocation		Conducted Power (dBm)			Antenna gain		EIRP(dBm)			Limit (dBm)	Verdict
	Size	Offset	LCH	MCH	HCH	(dBd)	(dBi)	LCH	MCH	HCH		
QPSK	1	0	22.88	22.77	23.08	/	1.00	23.88	23.77	24.08	30.00	PASS
		50	23.85	23.47	23.12	/	1.00	24.85	24.47	24.12	30.00	PASS
		99	23.11	23.77	23.71	/	1.00	24.11	24.77	24.71	30.00	PASS
	50	0	22.42	21.96	21.90	/	1.00	23.42	22.96	22.90	30.00	PASS
		25	22.75	22.39	22.05	/	1.00	23.75	23.39	23.05	30.00	PASS
		50	22.51	22.50	22.19	/	1.00	23.51	23.50	23.19	30.00	PASS
100	0	22.46	22.27	22.03	/	1.00	23.46	23.27	23.03	30.00	PASS	
16QAM	1	0	22.09	21.47	21.97	/	1.00	23.09	22.47	22.97	30.00	PASS
		50	23.16	22.09	22.62	/	1.00	24.16	23.09	23.62	30.00	PASS
		99	22.51	22.04	22.62	/	1.00	23.51	23.04	23.62	30.00	PASS
	50	0	21.40	20.97	20.94	/	1.00	22.40	21.97	21.94	30.00	PASS
		25	21.73	21.50	21.06	/	1.00	22.73	22.50	22.06	30.00	PASS
		50	21.37	21.50	21.27	/	1.00	22.37	22.50	22.27	30.00	PASS
100	0	21.51	21.24	20.99	/	1.00	22.51	22.24	21.99	30.00	PASS	

Test Band: 71_ 5MHz Bandwidth												
Modulation	RB Allocation		Conducted Power (dBm)			Antenna gain		ERP(dBm)			Limit (dBm)	Verdict
	Size	Offset	LCH	MCH	HCH	(dBd)	(dBi)	LCH	MCH	HCH		
QPSK	1	0	24.18	22.66	24.03	-1.15	1.00	23.03	21.51	22.88	34.77	PASS
		13	24.15	22.98	24.03	-1.15	1.00	23.00	21.83	22.88	34.77	PASS
		24	23.92	23.17	23.82	-1.15	1.00	22.77	22.02	22.67	34.77	PASS
	12	0	23.06	21.75	23.16	-1.15	1.00	21.91	20.60	22.01	34.77	PASS
		6	23.08	21.89	23.17	-1.15	1.00	21.93	20.74	22.02	34.77	PASS
		13	22.83	22.07	23.13	-1.15	1.00	21.68	20.92	21.98	34.77	PASS
25	0	22.92	21.82	23.20	-1.15	1.00	21.77	20.67	22.05	34.77	PASS	
16QAM	1	0	23.00	21.91	22.82	-1.15	1.00	21.85	20.76	21.67	34.77	PASS
		13	23.17	22.19	22.73	-1.15	1.00	22.02	21.04	21.58	34.77	PASS
		24	22.67	22.22	23.18	-1.15	1.00	21.52	21.07	22.03	34.77	PASS
	12	0	22.02	20.58	22.24	-1.15	1.00	20.87	19.43	21.09	34.77	PASS
		6	22.02	20.66	22.14	-1.15	1.00	20.87	19.51	20.99	34.77	PASS
		13	22.04	20.73	22.12	-1.15	1.00	20.89	19.58	20.97	34.77	PASS
25	0	21.97	20.88	22.10	-1.15	1.00	20.82	19.73	20.95	34.77	PASS	



Test Band: 71_ 10MHz Bandwidth												
Modulation	RB Allocation		Conducted Power (dBm)			Antenna gain		ERP(dBm)			Limit (dBm)	Verdict
	Size	Offset	LCH	MCH	HCH	(dBd)	(dBi)	LCH	MCH	HCH		
QPSK	1	0	24.07	22.69	23.88	-1.15	1.00	22.92	21.54	22.73	34.77	PASS
		25	23.93	23.28	24.07	-1.15	1.00	22.78	22.13	22.92	34.77	PASS
		49	23.24	23.45	23.91	-1.15	1.00	22.09	22.30	22.76	34.77	PASS
	25	0	22.92	21.76	22.99	-1.15	1.00	21.77	20.61	21.84	34.77	PASS
		13	22.67	21.97	23.18	-1.15	1.00	21.52	20.82	22.03	34.77	PASS
		25	22.52	22.14	23.18	-1.15	1.00	21.37	20.99	22.04	34.77	PASS
50	0	22.69	21.87	23.01	-1.15	1.00	21.54	20.72	21.86	34.77	PASS	
16QAM	1	0	23.20	22.01	22.12	-1.15	1.00	22.05	20.86	20.97	34.77	PASS
		25	22.80	22.29	23.19	-1.15	1.00	21.65	21.14	22.04	34.77	PASS
		49	22.39	22.67	22.90	-1.15	1.00	21.24	21.52	21.75	34.77	PASS
	25	0	21.90	20.88	22.00	-1.15	1.00	20.75	19.73	20.85	34.77	PASS
		13	21.60	20.93	22.01	-1.15	1.00	20.45	19.78	20.86	34.77	PASS
		25	21.45	21.19	22.01	-1.15	1.00	20.30	20.04	20.86	34.77	PASS
50	0	21.67	21.09	22.12	-1.15	1.00	20.52	19.94	20.97	34.77	PASS	

Test Band: 71_ 15MHz Bandwidth												
Modulation	RB Allocation		Conducted Power (dBm)			Antenna gain		ERP(dBm)			Limit (dBm)	Verdict
	Size	Offset	LCH	MCH	HCH	(dBd)	(dBi)	LCH	MCH	HCH		
QPSK	1	0	24.05	22.90	23.26	-1.15	1.00	22.90	21.75	22.11	34.77	PASS
		38	23.33	22.79	23.97	-1.15	1.00	22.18	21.64	22.82	34.77	PASS
		74	22.74	23.39	24.06	-1.15	1.00	21.59	22.24	22.91	34.77	PASS
	36	0	22.85	21.89	22.52	-1.15	1.00	21.70	20.74	21.37	34.77	PASS
		18	22.42	21.93	22.92	-1.15	1.00	21.27	20.78	21.77	34.77	PASS
		39	21.95	22.27	23.14	-1.15	1.00	20.80	21.12	21.99	34.77	PASS
75	0	22.37	22.01	22.75	-1.15	1.00	21.22	20.86	21.60	34.77	PASS	
16QAM	1	0	23.31	21.63	21.65	-1.15	1.00	22.16	20.48	20.50	34.77	PASS
		38	22.50	21.66	22.92	-1.15	1.00	21.35	20.51	21.77	34.77	PASS
		74	21.86	21.97	23.24	-1.15	1.00	20.71	20.82	22.09	34.77	PASS
	36	0	21.74	20.72	21.44	-1.15	1.00	20.59	19.57	20.29	34.77	PASS
		18	21.35	20.88	21.76	-1.15	1.00	20.20	19.73	20.60	34.77	PASS
		39	20.95	21.20	22.26	-1.15	1.00	19.80	20.05	21.11	34.77	PASS
75	0	21.33	20.90	21.82	-1.15	1.00	20.18	19.75	20.67	34.77	PASS	



Test Band: 71_20MHz Bandwidth													
Modulation	RB Allocation		Conducted Power (dBm)			Antenna gain		ERP(dBm)			Limit (dBm)	Verdict	
	Size	Offset	LCH	MCH	HCH	(dBd)	(dBi)	LCH	MCH	HCH			
QPSK	1	0	24.00	23.09	22.56	-1.15	1.00	22.85	21.94	21.41	34.77	PASS	
		50	23.26	22.99	23.76	-1.15	1.00	22.11	21.84	22.61	34.77	PASS	
		99	23.26	23.69	24.12	-1.15	1.00	22.11	22.54	22.97	34.77	PASS	
	50	0	22.57	21.89	22.20	-1.15	1.00	21.42	20.74	21.05	34.77	PASS	
		25	22.12	21.96	22.65	-1.15	1.00	20.97	20.81	21.50	34.77	PASS	
		50	21.88	22.27	23.16	-1.15	1.00	20.73	21.12	22.01	34.77	PASS	
	100	0	22.19	22.19	22.76	-1.15	1.00	21.04	21.04	21.61	34.77	PASS	
	16QAM	1	0	23.24	22.13	21.94	-1.15	1.00	22.09	20.98	20.79	34.77	PASS
			50	22.52	21.70	23.51	-1.15	1.00	21.37	20.55	22.36	34.77	PASS
99			22.49	22.11	23.51	-1.15	1.00	21.34	20.96	22.36	34.77	PASS	
50		0	21.67	20.85	21.30	-1.15	1.00	20.52	19.70	20.15	34.77	PASS	
		25	21.22	21.00	21.77	-1.15	1.00	20.07	19.85	20.62	34.77	PASS	
		50	20.68	21.37	22.18	-1.15	1.00	19.53	20.22	21.03	34.77	PASS	
100		0	21.08	21.05	21.74	-1.15	1.00	19.93	19.90	20.59	34.77	PASS	




11. EUT And Test Setup Photo

11.1 EUT Photo


Front side




Back side

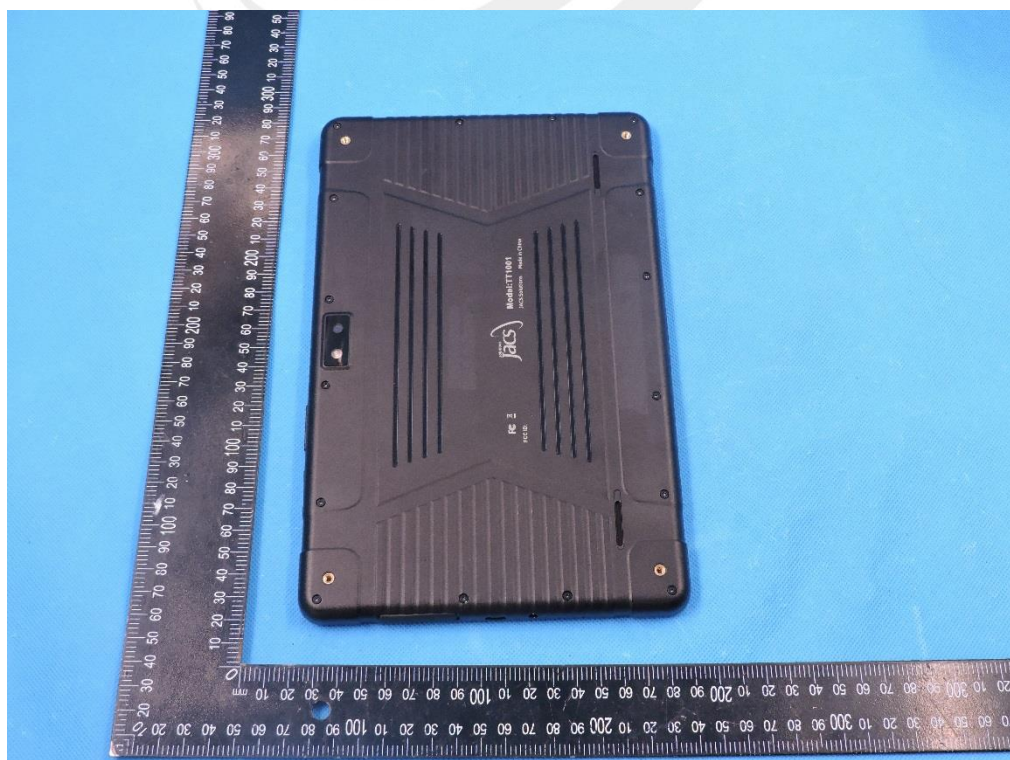

Top side

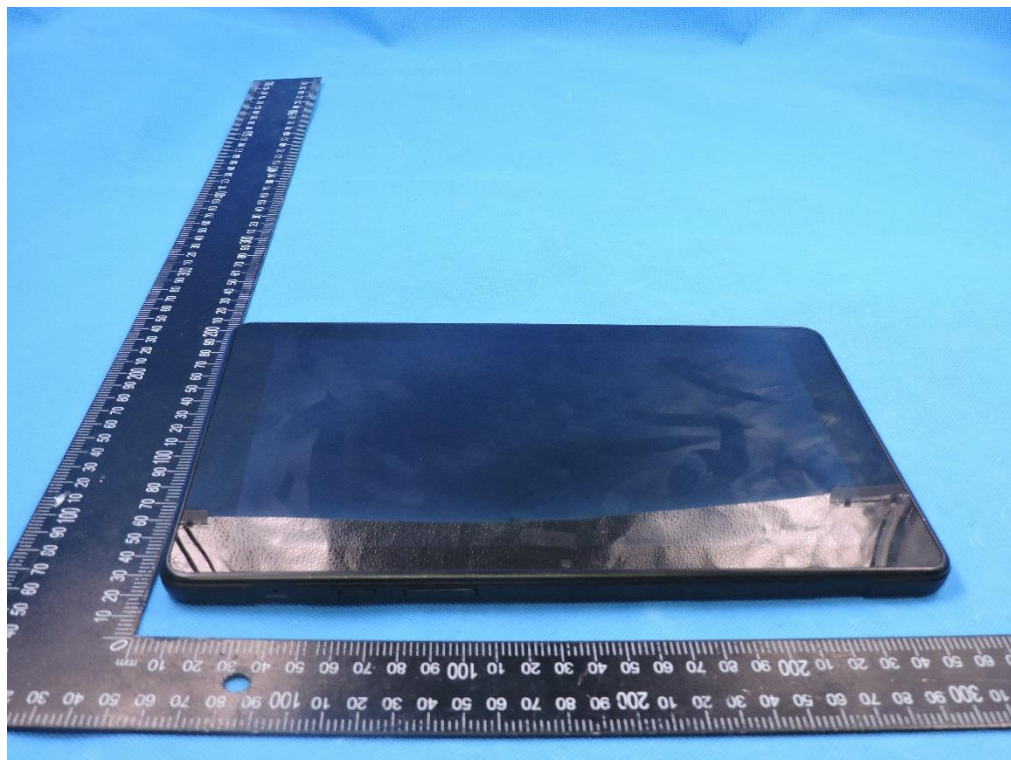


Bottom side

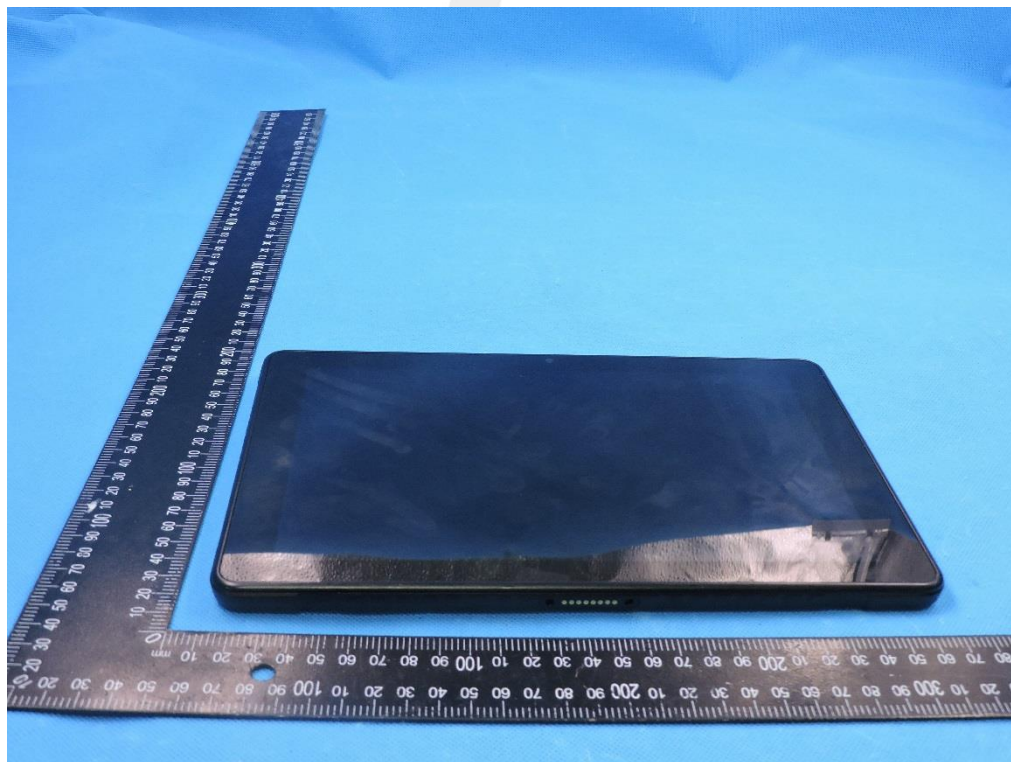



Left side

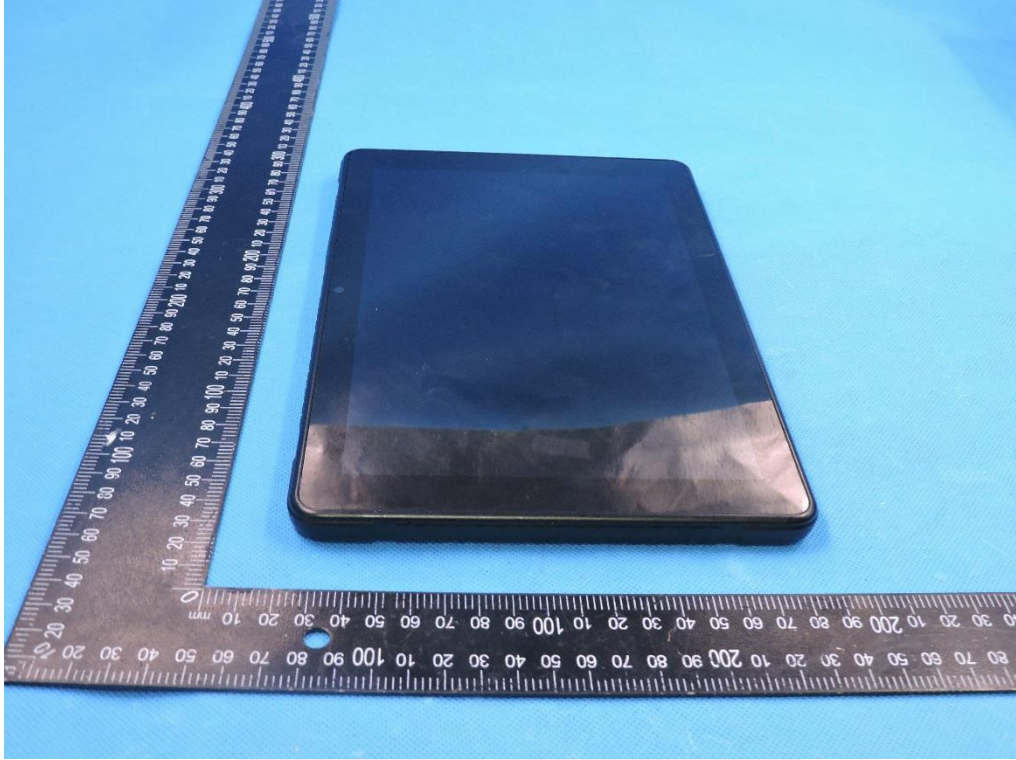

Right side




11.2 Setup Photo

Body Back side(separation distance is 0mm)




Body Right side(separation distance is 0mm)

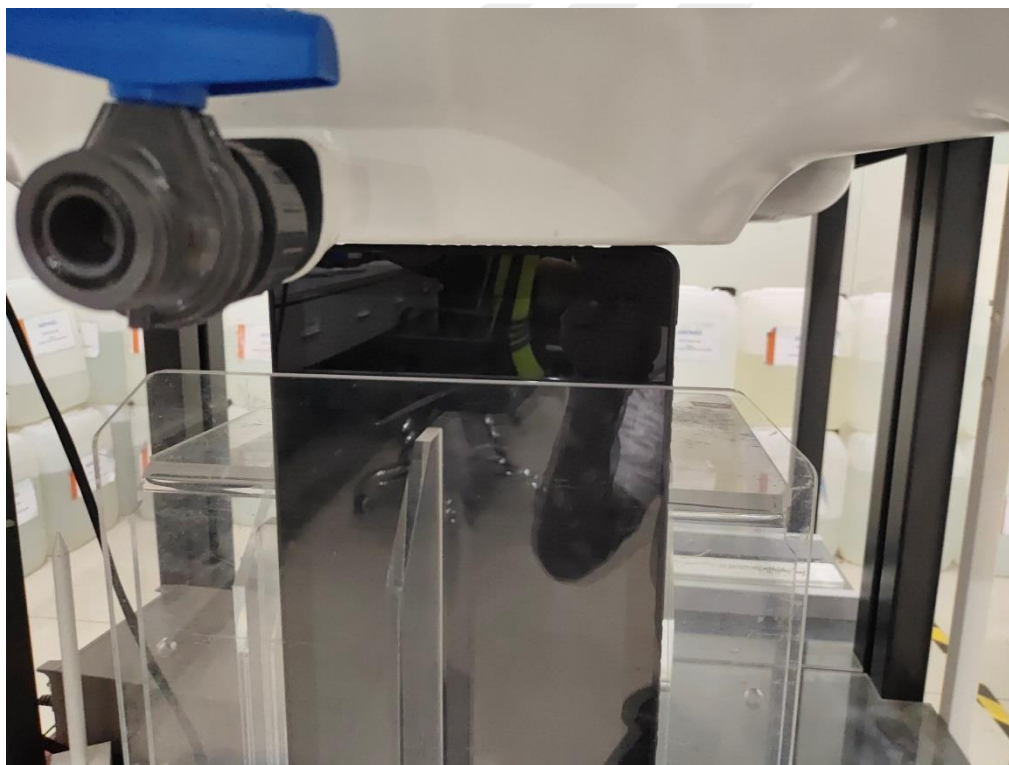

Body Top side(separation distance is 0mm)



Body Bottom side(separation distance is 0mm)

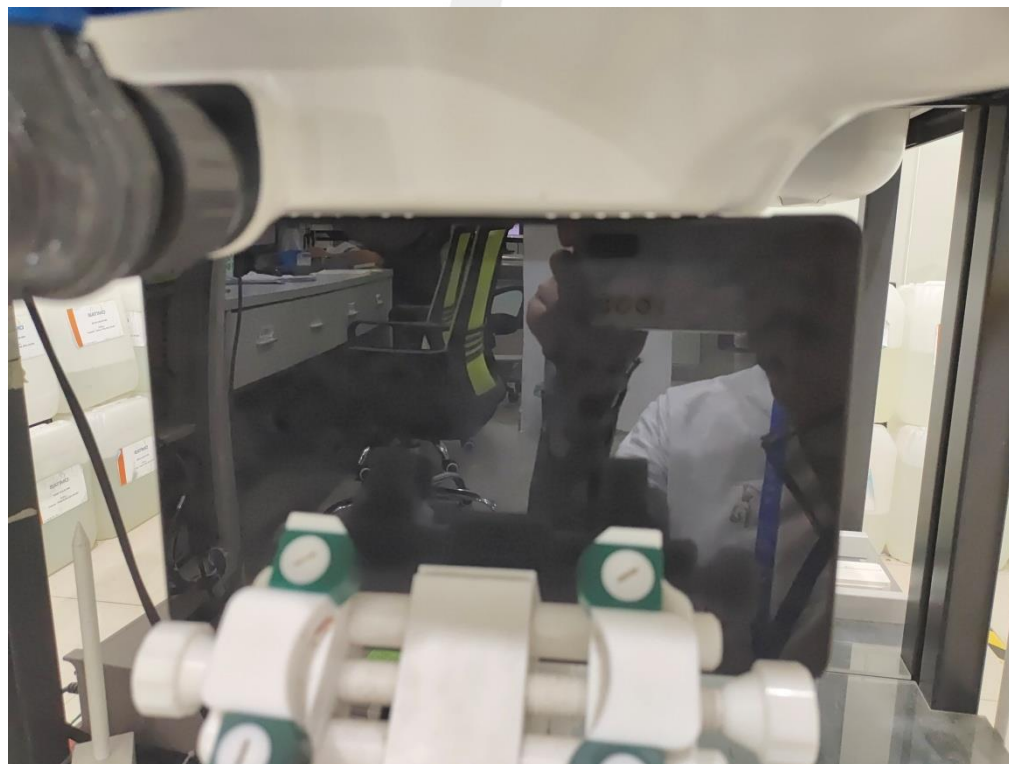

Liquid depth (15 cm)





12. SAR Result Summary

12.1 Body-worn SAR

Band	Model	Test Position	Ch.	Result 1g (W/Kg)	Power Drift(%)	Max.Turn-up	Meas.Output	Scaled SAR	Meas.
						Power(dBm)	Power(dBm)	(W/Kg)	No.
WCDMA Band II	RMC	Front Side	9637	0.126	-1.42	22.00	21.71	0.135	/
		Back Side	9637	0.581	-3.76	22.00	21.71	0.621	1
		Right Edge	9637	0.270	-0.59	22.00	21.71	0.289	/
		Bottom Edge	9637	0.138	-1.05	22.00	21.71	0.148	/
WCDMA Band IV	RMC	Front Side	1450	0.212	-0.06	22.00	21.94	0.215	/
		Back Side	1450	0.452	0.91	22.00	21.94	0.458	2
		Right Edge	1450	0.221	2.99	22.00	21.94	0.224	/
		Bottom Edge	1450	0.123	1.19	22.00	21.94	0.125	/
WCDMA Band V	RMC	Front Side	4133	0.021	-1.25	22.50	22.40	0.021	/
		Back Side	4133	0.055	1.94	22.50	22.40	0.056	3
		Right Edge	4133	0.025	-0.31	22.50	22.40	0.026	/
		Bottom Edge	4133	0.016	1.41	22.50	22.40	0.016	/



Band	BW (MHz)	Mod.	RB Size	RB offset	Test Position	Ch.	Result 1g (W/Kg)	Power Drift(%)	Max. Turn-up Power(dBm)	Meas. Output Power(dBm)	Scaled SAR (W/Kg)	Meas.No.
LTE Band 2	20M	QPSK	1	0	Back Side	18900	0.565	2.84	24.50	24.01	0.632	4
			50	0	Back Side	18900	0.434	-2.27	23.50	23.03	0.484	/
			1	0	Right Side	18900	0.375	-1.38	24.50	24.01	0.420	/
			50	0	Right Side	18900	0.261	0.49	23.50	23.03	0.291	/
			1	0	Bottom Side	18900	0.201	1.34	24.50	24.01	0.225	/
			50	0	Bottom Side	18900	0.123	3.61	23.50	23.03	0.137	/
LTE Band 4	20M	QPSK	1	50	Back Side	20050	0.544	3.46	24.00	23.64	0.591	5
			50	25	Back Side	20050	0.434	1.31	22.50	22.28	0.457	/
			1	50	Right Side	20050	0.390	-0.26	24.00	23.64	0.424	/
			50	25	Right Side	20050	0.320	3.59	22.50	22.28	0.337	/
			1	50	Bottom Side	20050	0.208	2.18	24.00	23.64	0.226	/
			50	25	Bottom Side	20050	0.111	1.96	22.50	22.28	0.117	/
LTE Band 5	10M	QPSK	1	25	Back Side	20600	0.034	2.20	24.50	24.28	0.036	6
			25	13	Back Side	20600	0.029	1.42	23.50	23.14	0.032	/
			1	25	Right Side	20600	0.025	-2.91	24.50	24.28	0.026	/
			25	13	Right Side	20600	0.021	-2.34	23.50	23.14	0.023	/
			1	25	Bottom Side	20600	0.026	-2.51	24.50	24.28	0.027	/
			25	13	Bottom Side	20600	0.022	3.27	23.50	23.14	0.024	/
LTE Band 12	10M	QPSK	1	0	Back Side	23060	0.098	-1.20	24.00	23.81	0.102	7
			25	0	Back Side	23060	0.075	-3.23	23.00	22.59	0.082	/
			1	0	Right Side	23060	0.065	-3.85	24.00	23.81	0.068	/
			25	0	Right Side	23060	0.051	0.04	23.00	22.59	0.056	/
			1	0	Bottom Side	23060	0.033	-1.55	24.00	23.81	0.034	/
			25	0	Bottom Side	23060	0.029	0.36	23.00	22.59	0.032	/
LTE Band 13	10M	QPSK	1	25	Back Side	23230	0.056	0.70	25.00	24.23	0.067	8
			25	13	Back Side	23230	0.049	2.88	24.00	24.30	0.046	/
			1	25	Right Side	23230	0.033	1.86	25.00	24.23	0.039	/
			25	13	Right Side	23230	0.031	0.76	24.00	24.30	0.029	/
			1	25	Bottom Side	23230	0.022	3.90	25.00	24.23	0.026	/
			25	13	Bottom Side	23230	0.018	1.28	24.00	24.30	0.017	/



LTE Band 14	10M	QPSK	1	0	Back Side	23330	0.049	2.27	24.50	24.07	0.054	9
			25	0	Back Side	23330	0.044	-0.51	23.00	22.89	0.045	/
			1	0	Right Side	23330	0.032	-0.02	24.50	24.07	0.035	/
			25	0	Right Side	23330	0.030	0.67	23.00	22.89	0.031	/
			1	0	Bottom Side	23330	0.022	2.66	24.50	24.07	0.024	/
			25	0	Bottom Side	23330	0.011	3.02	23.00	22.89	0.011	/
LTE Band 66	20M	QPSK	1	50	Back Side	132072	0.632	-1.51	24.00	23.85	0.654	10
			50	25	Back Side	132072	0.533	-0.97	23.00	22.75	0.565	/
			1	50	Right Side	132072	0.365	-0.48	24.00	23.85	0.378	/
			50	25	Right Side	132072	0.345	-0.35	23.00	22.75	0.365	/
			1	50	Bottom Side	132072	0.158	-3.22	24.00	23.85	0.164	/
			50	25	Bottom Side	132072	0.132	1.96	23.00	22.75	0.140	/
LTE Band 71	20M	QPSK	1	99	Front side	133372	0.176	-3.04	24.50	24.12	0.192	11
			50	50	Front side	133372	0.156	3.25	23.50	23.16	0.169	/
			1	99	Right Side	133372	0.122	3.08	24.50	24.12	0.133	/
			50	50	Right Side	133372	0.101	2.12	23.50	23.16	0.109	/
			1	99	Bottom Side	133372	0.085	-0.14	24.50	24.12	0.093	/
			50	50	Bottom Side	133372	0.078	2.48	23.50	23.16	0.084	/



Band	Model	Test Position	Ch.	Result 1g (W/Kg)	Power Drift(%)	Max.Turn-up	Meas.Output	Scaled SAR	Meas.
						Power(dBm)	Power(dBm)	(W/Kg)	No.
2.4GHz WLAN	802.11b ANT 1	Back Side	6	0.684	-1.66	23.10	23.04	0.694	/
		Top Edge	6	0.727	3.60	23.10	23.04	0.737	12
2.4GHz WLAN	802.11b ANT 2	Back Side	6	0.546	3.40	21.50	21.34	0.566	/
		Right Edge	6	0.236	-1.43	21.50	21.34	0.245	/
		Top Edge	6	0.565	-2.82	21.50	21.34	0.586	13
2.4GHz WLAN	802.11n20 ANT 1	Back Side	6	0.316	3.21	23.50	23.29	0.332	14
		Top Edge	6	0.309	3.07	23.50	23.29	0.324	/
2.4GHz WLAN	802.11n20 ANT 2	Back Side	6	0.235	1.00	23.50	23.34	0.244	/
		Right Edge	6	0.175	3.14	23.50	23.34	0.182	/
		Top Edge	6	0.279	-3.94	23.50	23.34	0.289	15
5.2GHz WLAN	802.11a ANT 1	Back Side	36	0.125	-2.96	15.00	14.65	0.135	/
		Top Edge	36	0.563	-3.22	15.00	14.65	0.610	16
5.2GHz WLAN	802.11a ANT 2	Back Side	48	0.595	3.19	14.00	13.95	0.602	/
		Right Edge	48	0.226	1.73	14.00	13.95	0.229	/
		Top Edge	36	0.641	0.03	14.00	13.66	0.693	/
		Top Edge	40	0.636	3.28	14.00	13.68	0.685	/
		Top Edge	48	0.875	-3.97	14.00	13.95	0.885	17
5.2GHz WLAN	802.11n20 ANT 1	Back Side	36	0.128	2.13	15.50	15.04	0.142	/
		Top Edge	36	0.295	-3.29	15.50	15.04	0.328	18
5.2GHz WLAN	802.11n20 ANT 2	Back Side	36	0.414	-2.28	14.50	13.52	0.519	/
		Right Edge	36	0.311	-0.82	14.50	13.52	0.390	/
		Top Edge	36	0.487	3.35	14.50	13.52	0.610	19
5.8GHz WLAN	802.11a ANT 1	Back Side	165	0.207	-1.75	15.50	15.07	0.229	/
		Top Edge	165	0.326	0.12	15.50	15.07	0.360	20
5.8GHz WLAN	802.11a ANT 2	Back Side	157	0.234	2.26	14.00	13.46	0.265	/
		Right Edge	157	0.208	-2.21	14.00	13.46	0.236	/
		Top Edge	157	0.537	-0.25	14.00	13.46	0.608	21
5.8GHz WLAN	802.11n20 ANT 1	Back Side	165	0.078	3.14	15.00	14.79	0.082	/
		Top Edge	165	0.120	3.27	15.00	14.79	0.126	22
5.8GHz WLAN	802.11n20 ANT 2	Back Side	165	0.118	1.68	13.50	12.73	0.141	/
		Right Edge	165	0.084	2.72	13.50	12.73	0.100	/
		Top Edge	165	0.162	-1.30	13.50	12.73	0.193	23



Band	Model	Scaled SAR	ANT 1+2 (W/Kg)
		(W/Kg)	
2.4GHz WLAN	802.11n20 ANT 1	0.332	0.621
2.4GHz WLAN	802.11n20 ANT 2	0.289	
5.2GHz WLAN	802.11n20 ANT 1	0.328	0.938
5.2GHz WLAN	802.11n20 ANT 2	0.610	
5.8GHz WLAN	802.11n20 ANT 1	0.126	0.319
5.8GHz WLAN	802.11n20 ANT 2	0.193	

Note:

1. The test separation of all above table is 0mm.
2. The Bluetooth and WLAN can't simultaneous transmission at the same time.
3. Per KDB 447498 D01, the reported SAR is the measured SAR value adjusted for maximum tune-up tolerance.
 - a. Tune-up scaling Factor = tune-up limit power (mW) / EUT RF power (mW), where tune-up limit is the maximum rated power among all production units.
 - b. For WWAN: Scaled SAR(W/kg)= Measured SAR(W/kg)*Tune-up Scaling Factor
4. Per KDB 248227- When the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg. (The highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power was **0.484** W/kg for Body)
5. When the user enables the personal Wireless router functions for the handsets, actual operations include simultaneous transmission of both the Wi-Fi transmitting frequency and thus cannot be evaluated for SAR under actual use conditions. The "Portable Hotspot" feature on the handset was NOT activated, to ensure the SAR measurements were evaluated for a single transmission frequency RF signal.

**Repeated SAR**


Band	Mode	Test Position	Ch.	Result 1g (W/Kg)	Power Drift(%)	Max.Turn-up Power(dBm)	Meas.Output Power(dBm)	Scaled SAR (W/Kg)	Meas. No.
5.2GHz WLAN	802.11a ANT 2	Top Edge	48	0.851	0.88	14	13.95	0.861	/

12.2 repeated SAR measurement

Band	Mode	Test Position	Ch.	Original Measured SAR 1g(mW/g)	1 st Repeated SAR 1g	Ratio	Original Measured SAR 1g(mW/g)	2nd Repeated SAR 1g	Ratio
5.2GHz WLAN	802.11a ANT 2	Top Edge	48	0.875	0.851	1.028	-	-	-

Note:

1. Per KDB 865664 D01,for each frequency band ,repeated SAR measurement is required only when the measured SAR is ≥ 0.8 W/Kg.
2. Per KDB 865664 D01,if the ratio of largest to smallest SAR for the original and first repeated measurement is ≤ 1.2 and the measured SAR < 1.45 W/Kg, only one repeated measurement is required.
3. Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is > 1.20 or when the original or repeated measurement is ≥ 1.45 W/Kg
4. The ratio is the difference in percentage between original and repeated measured SAR.

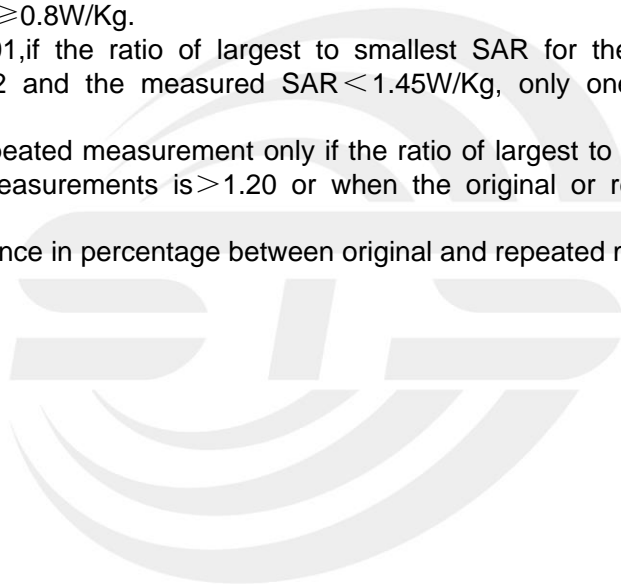



Simultaneous Multi-band Transmission Evaluation:

Application Simultaneous Transmission information:

Position	Simultaneous State
Body	1. WCDMA + 2.4GHz WLAN/5G WLAN
	2. WCDMA + Bluetooth
	3. LTE + 2.4GHz WLAN/5G WLAN
	4. LTE + Bluetooth

NOTE:

- Bluetooth and WLAN can't simultaneous transmission at the same time.
- For simultaneous transmission at head and body exposure position, 2 transmitters simultaneous transmission was the worst state.
- Based upon KDB 447498 D01, BT SAR is excluded as below table.
- If the test separation distance is <5mm, 5mm is used for excluded SAR calculation.
- For minimum test separation distance $\leq 50\text{mm}$, Bluetooth standalone SAR is excluded according to $[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm}) \cdot (\sqrt{f} \text{ (GHz)} / x)] \leq 3.0$ for 1-g SAR and ≤ 7.5 for 10-g extremity SAR
- The reported SAR summation is calculated based on the same configuration and test position.
- KDB 447498 / 4.3.2 (2) when standalone SAR test exclusion applies to an antenna that transmits simultaneously with other antennas, the standalone SAR must be estimated according to following to determine simultaneous transmission SAR test exclusion:
 - $(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm}) \cdot [\sqrt{f} \text{ (GHz)} / x] \text{ W/kg}$ for test separation distances $\leq 50 \text{ mm}$;
Where $x = 7.5$ for 1-g SAR, and $x = 18.75$ for 10-g SAR.
 - 0.4W/Kg for 1-g SAR and 1.0W/Kg for 10-g SAR, when the separation distance is $>50\text{mm}$.

Estimated SAR		Maximum Turn-up Power		Antenna to user(mm)	Frequency(GHz)	Stand Alone SAR(1g) [W/kg]
		dBm	mW			
BT	Body	7	5.012	≤ 5	2.440	0.209



Simultaneous Mode	Position	Mode	Max. 1-g SAR	1-g Sum SAR
			(W/kg)	(W/kg)
WCDMA + 2.4G WLAN	Body	WCDMA	0.621	1.358
		2.4G WLAN	0.737	
WCDMA + Bluetooth	Body	WCDMA	0.621	0.830
		Bluetooth	0.209	
WCDMA + 5.2G WLAN	Body	WCDMA	0.621	1.559
		5.2G WLAN	0.938	
WCDMA + 5.8G WLAN	Body	WCDMA	0.621	1.229
		5.8G WLAN	0.608	
LTE + 2.4G WLAN	Body	LTE	0.654	1.391
		2.4G WLAN	0.737	
LTE + Bluetooth	Body	LTE	0.654	0.863
		Bluetooth	0.209	
LTE + 5.2G WLAN	Body	LTE	0.654	1.592
		5.2G WLAN	0.938	
LTE + 5.8G WLAN	Body	LTE	0.654	1.262
		5.8G WLAN	0.608	

Simultaneous transmission SAR test exclusion is determined for each operating configuration and exposure condition according to the reported standalone SAR of each applicable simultaneous transmitting antenna.

When the sum of SAR 1g of all simultaneously transmitting antennas in an operating mode and exposure condition combination is within the SAR limit (SAR-1g 1.6 W/kg), the simultaneous transmission SAR is not required. When the sum of SAR 1g is greater than the SAR limit (SAR-1g 1.6 W/kg), SAR test exclusion is determined by the SPLSR.



13. Equipment List

Kind of Equipment	Manufacturer	Type No.	Serial No.	Last Calibration	Calibrated Until
750MHz Dipole	MVG	SID750	SN 30/14 DIP0G750-331	2020.07.14	2023.07.13
835MHz Dipole	MVG	SID835	SN 30/14 DIP0G835-332	2020.07.14	2023.07.13
1800MHz Dipole	MVG	SID1800	SN 30/14 DIP1G800-329	2020.07.14	2023.07.13
1900MHz Dipole	MVG	SID1900	SN 30/14 DIP1G900-333	2020.07.14	2023.07.13
2450MHzDipole	MVG	SID2450	SN 30/14 DIP2G450-335	2020.07.14	2023.07.13
Waveguide	SATIMO	SWG5500	SN 13/14 WGA32	2020.07.14	2023.07.13
E-Field Probe	MVG	SSE2	SN 07/21 EPGO352	2021.03.01	2022.02.28
Dielectric Probe Kit	MVG	SCLMP	SN 32/14 OCPG67	2020.11.24	2021.11.23
Antenna	MVG	ANTA3	SN 07/13 ZNTA52	N/A	N/A
Phantom1	MVG	SAM	SN 32/14 SAM115	N/A	N/A
Phantom2	MVG	SAM	SN 32/14 SAM116	N/A	N/A
Phone holder	MVG	N/A	SN 32/14 MSH97	N/A	N/A
Laptop holder	MVG	N/A	SN 32/14 LSH29	N/A	N/A
Attenuator	Agilent	99899	DC-18GHz	N/A	N/A
Directional coupler	Narda	4226-20	3305	N/A	N/A
Network Analyzer	Agilent	8753ES	US38432810	2020.10.12	2021.10.11
Multi Meter	Keithley	Multi Meter 2000	4050073	2020.10.10	2021.10.09
Signal Generator	Agilent	N5182A	MY50140530	2020.10.10	2021.10.09
Wireless Communication Test Set	Agilent	8960-E5515C	MY48360751	2020.10.10	2021.10.09
Wireless Communication Test Set	R&S	CMW500	117239	2020.10.10	2021.10.09
Power Amplifier	DESAY	ZHL-42W	9638	2020.10.12	2021.10.11
Power Meter	R&S	NRP	100510	2020.10.10	2021.10.09
Power Meter	Agilent	E4418B	GB43312526	2020.10.10	2021.10.09
Power Sensor	R&S	NRP-Z11	101919	2020.10.10	2021.10.09
Power Sensor	Agilent	E9301A	MY41497725	2020.10.10	2021.10.09
Temperature hygrometer	SuWei	SW-108	N/A	2020.10.12	2021.10.11
Thermograph	Elitech	RC-4	S/N EF7176501537	2020.10.12	2021.10.11

Note:

Per KDB 865664 D01, Dipole SAR Validation Verification, STS LAB has adopted 3 years calibration intervals. On annual basis, every measurement dipole has been evaluated and is in compliance with the following criteria:

1. There is no physical damage on the dipole
2. System validation with specific dipole is within 10% of calibrated value

Return-loss in within 20% of calibrated measurement

Appendix A. System Validation Plots

System Performance Check Data (750MHz)

Type: Phone measurement (Complete)


Area scan resolution: dx=8mm, dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 2021-04-30

Experimental conditions




Phantom	Validation plane
Device Position	-
Band	750MHz
Channels	-
Signal	CW
Frequency (MHz)	750MHz
Relative permittivity	41.08
Conductivity (S/m)	0.90
Probe	SN 07/21 EPGO352
ConvF	1.58
Crest factor	1:1

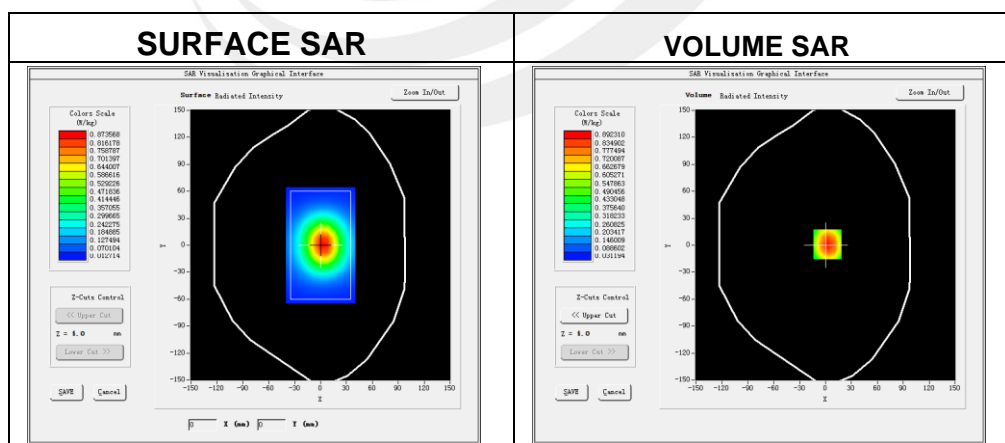

Maximum location: X=2.00, Y=1.00

SAR 10g (W/Kg)	0.556720
SAR 1g (W/Kg)	0.868125

Z Axis Scan

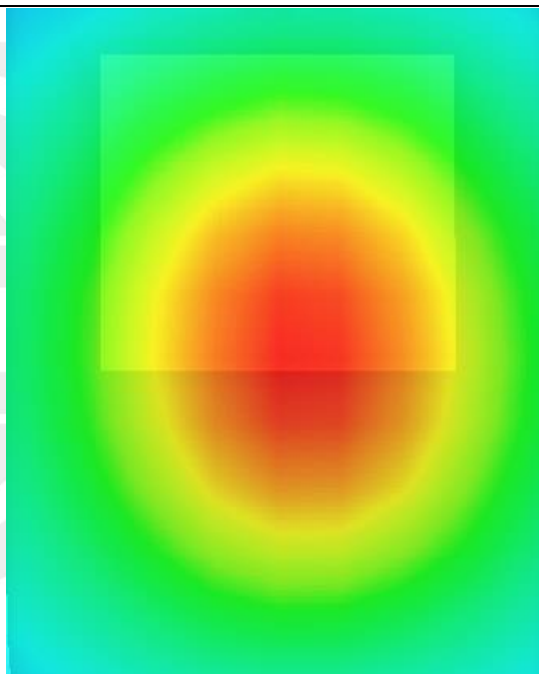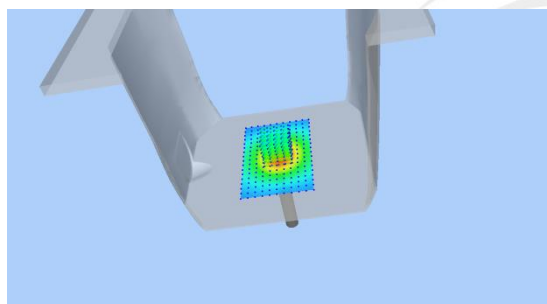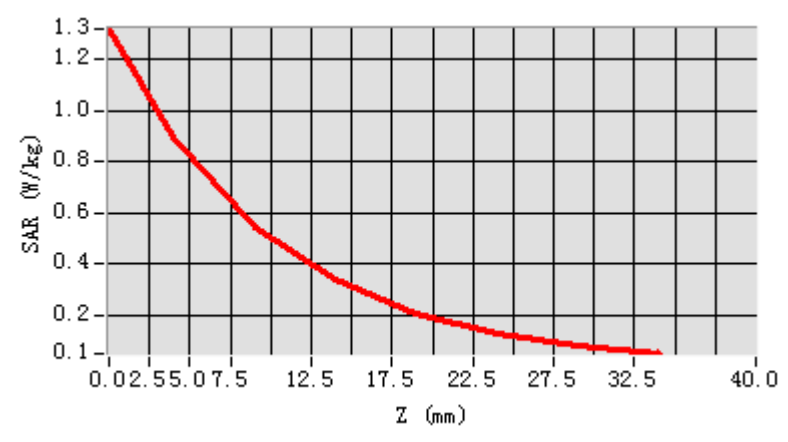

System Performance Check Data (835MHz)

Type: Phone measurement (Complete)


Area scan resolution: dx=8mm, dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 2021-05-06

Experimental conditions


Phantom	Validation plane
Device Position	-
Band	835MHz
Channels	-
Signal	CW
Frequency (MHz)	835MHz
Relative permittivity	41.19
Conductivity (S/m)	0.88
Probe	SN 07/21 EPG0352
ConvF:	1.57
Crest factor:	1:1

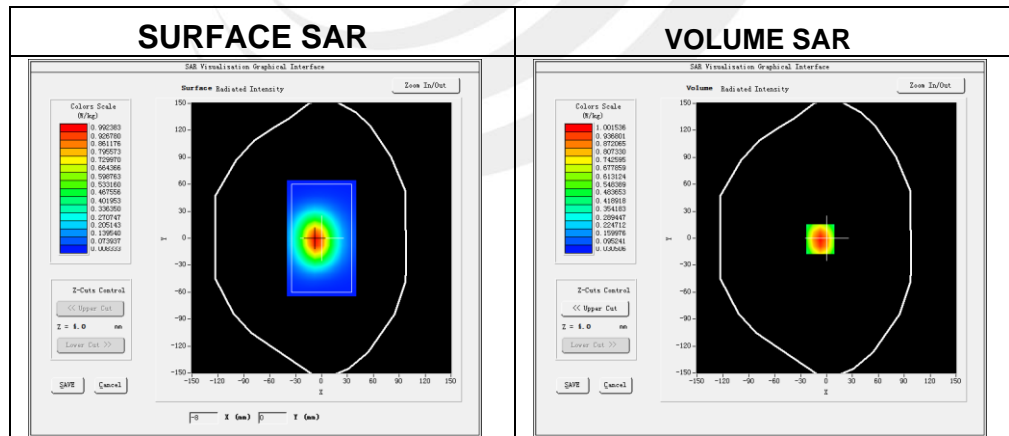

Maximum location: X=-7.00, Y=-1.00

SAR 10g (W/Kg)	0.632701
SAR 1g (W/Kg)	0.925310

Z Axis Scan

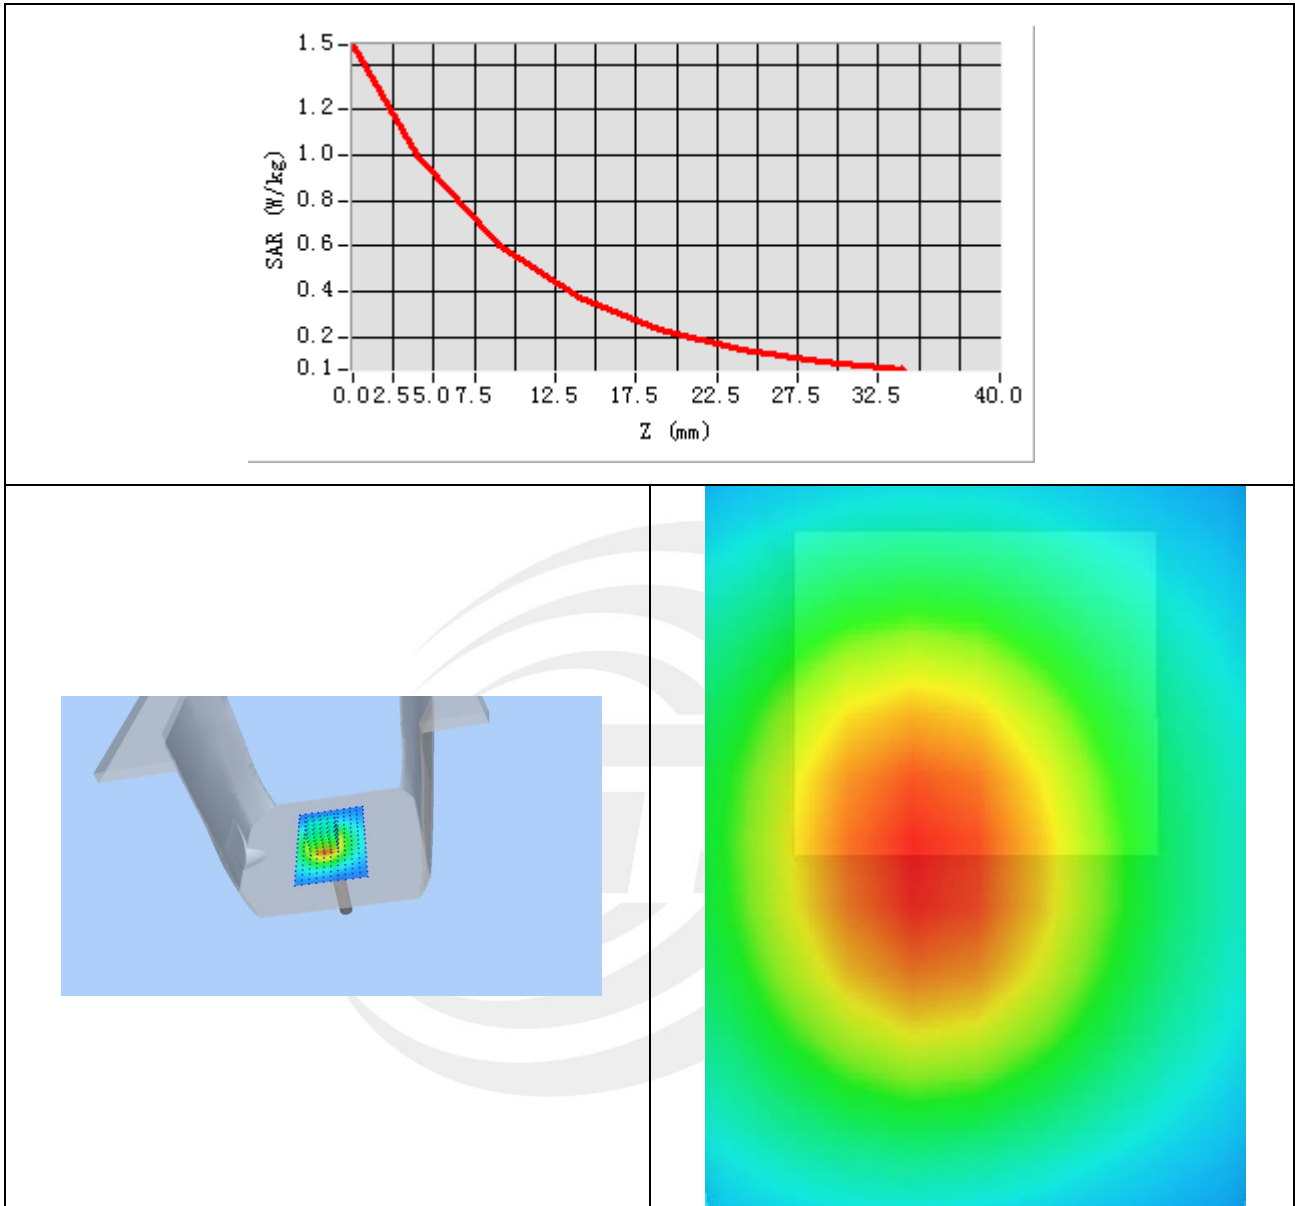

System Performance Check Data(1800MHz)

Type: Phone measurement (Complete)


Area scan resolution: dx=8mm, dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 2021-05-08

Experimental conditions.




Phantom	Validation plane
Device Position	-
Band	1800MHz
Channels	-
Signal	CW
Frequency (MHz)	1800MHz
Relative permittivity	40.99
Conductivity (S/m)	1.40
Probe	SN 07/21 EPGO352
ConvF	1.60
Crest factor:	1:1

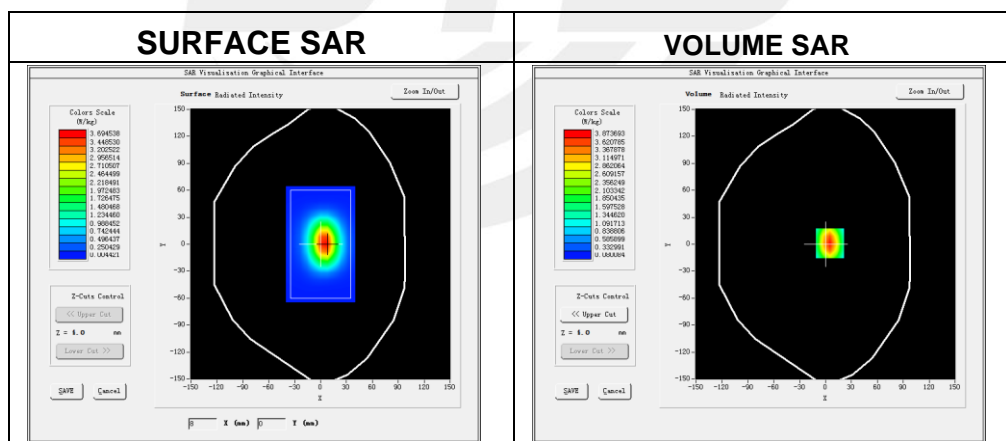

Maximum location: X=5.00, Y=1.00

SAR 10g (W/Kg)	2.073271
SAR 1g (W/Kg)	3.940271

Z Axis Scan

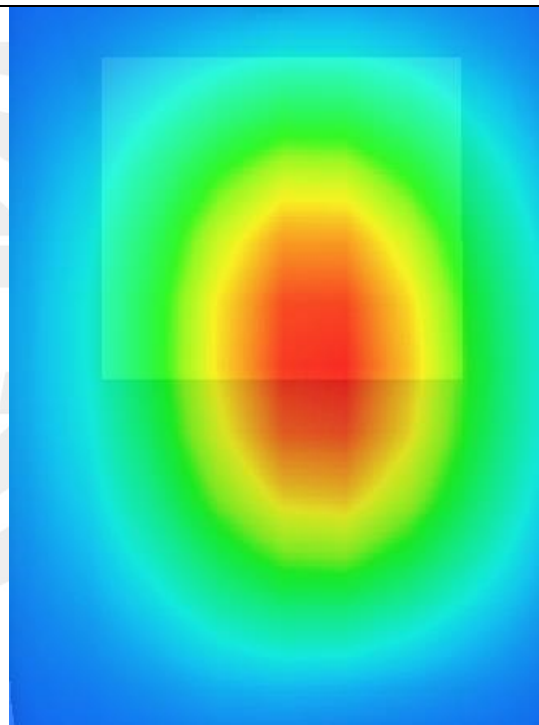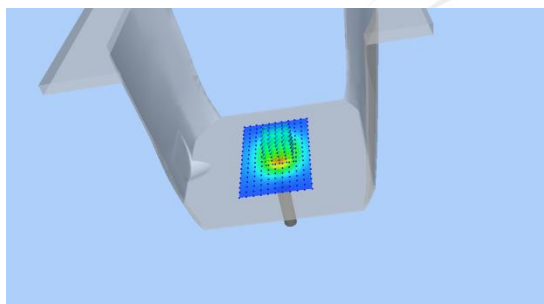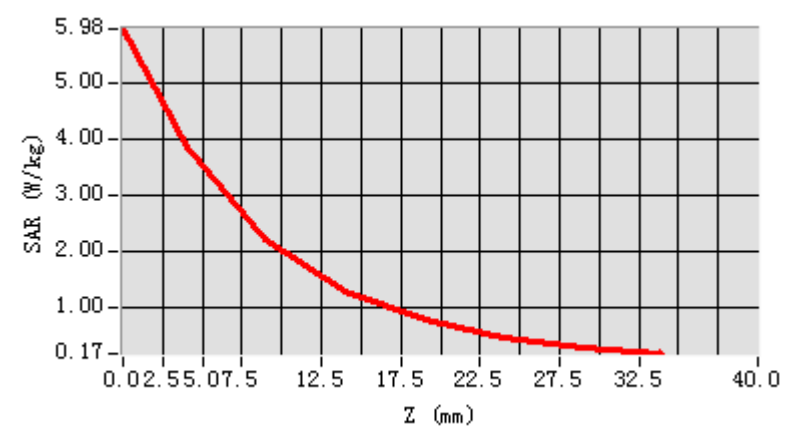



System Performance Check Data (1900MHz)

Type: Phone measurement (Complete)


Area scan resolution: dx=8mm, dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 2021-05-10

Experimental conditions.




Phantom	Validation plane
Device Position	-
Band	1900MHz
Channels	-
Signal	CW
Frequency (MHz)	1900MHz
Relative permittivity	40.47
Conductivity (S/m)	1.35
Probe	SN 07/21 EPGO352
ConvF:	1.78
Crest factor:	1:1

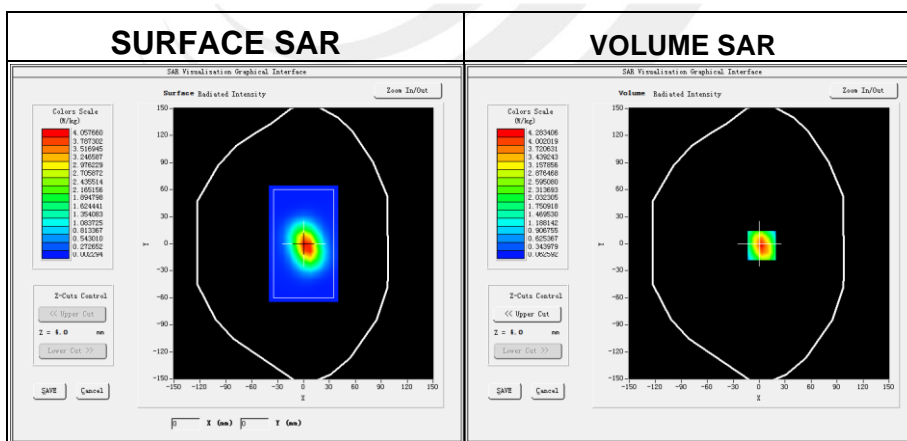

Maximum location: X=3.00, Y=-2.00

SAR 10g (W/Kg)	2.037510
SAR 1g (W/Kg)	3.985120

Z Axis Scan

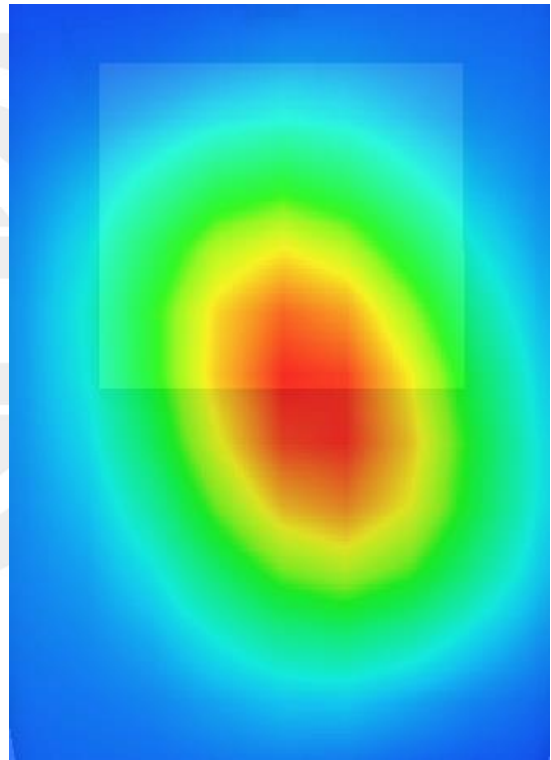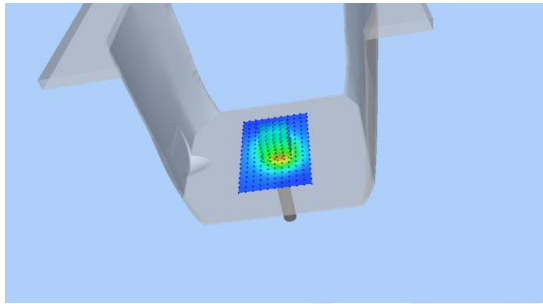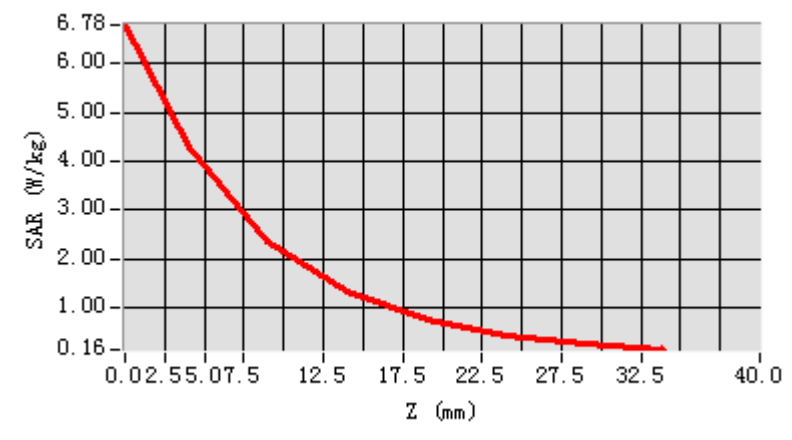

System Performance Check Data (2450MHz)

Type: Phone measurement (Complete)


Area scan resolution: dx=8mm, dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 2021-05-11

Experimental conditions.




Device Position	Validation plane
Band	2450 MHz
Channels	-
Signal	CW
Frequency (MHz)	2450
Relative permittivity	38.84
Conductivity (S/m)	1.78
Probe	SN 07/21 EPGO352
ConvF	1.75
Crest factor	1:1

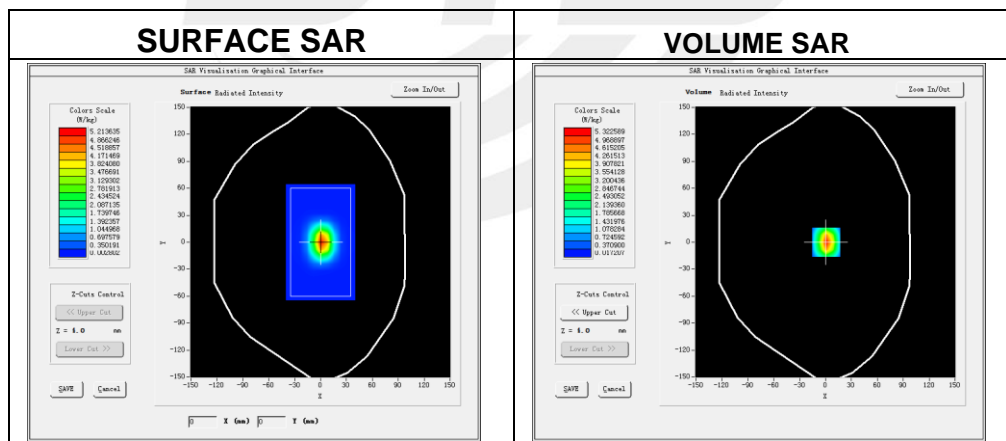

Maximum location: X=1.00, Y=0.00

SAR 10g (W/Kg)	2.375107
SAR 1g (W/Kg)	5.154202

Z Axis Scan

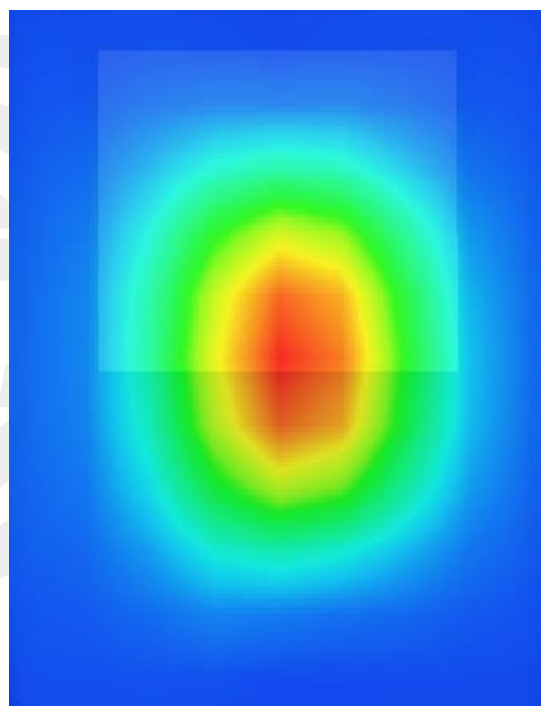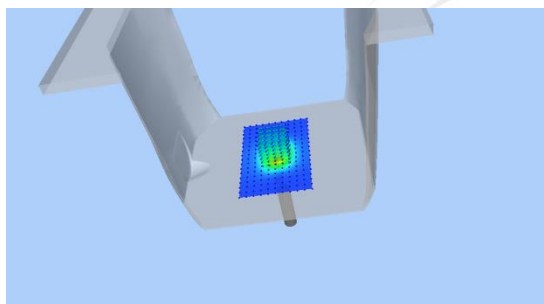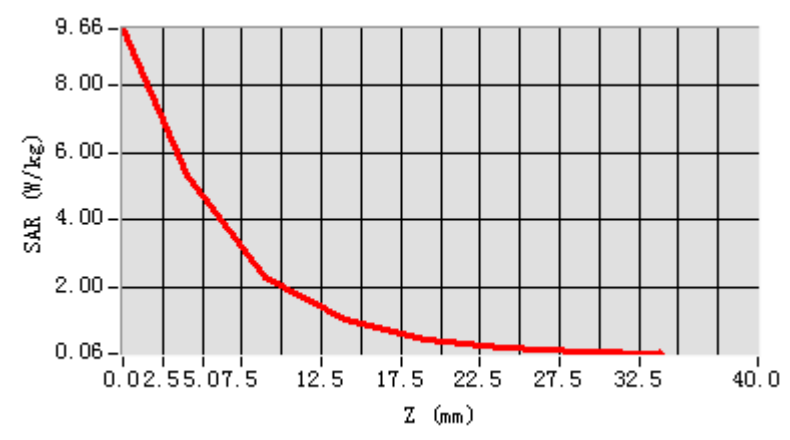

System Performance Check Data(5200MHz)

Type: Dipole measurement (Complete)


Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=4mm, dy=4mm, dz=2mm

Date of measurement: 2021-05-12

Experimental conditions.

Device Position	Validation plane
Band	5200 MHz
Channels	-
Signal	CW
Frequency (MHz)	5200
Relative permittivity	34.60
Conductivity (S/m)	4.49
Probe	SN 07/21 EPGO352
ConvF	1.47
Crest factor:	1:1

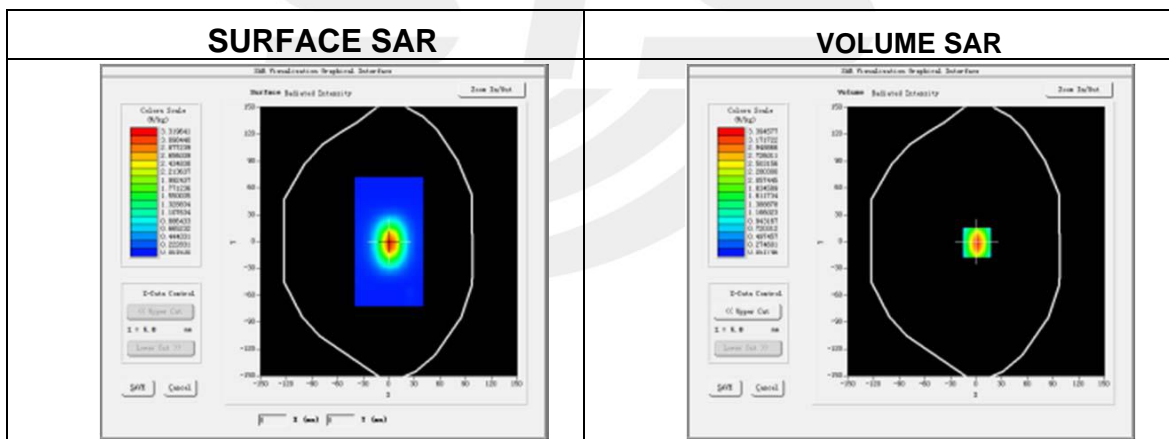


Maximum location: X=7.00, Y=2.00

SAR 10g (W/Kg)	5.583721
SAR 1g (W/Kg)	16.148201



Z Axis Scan

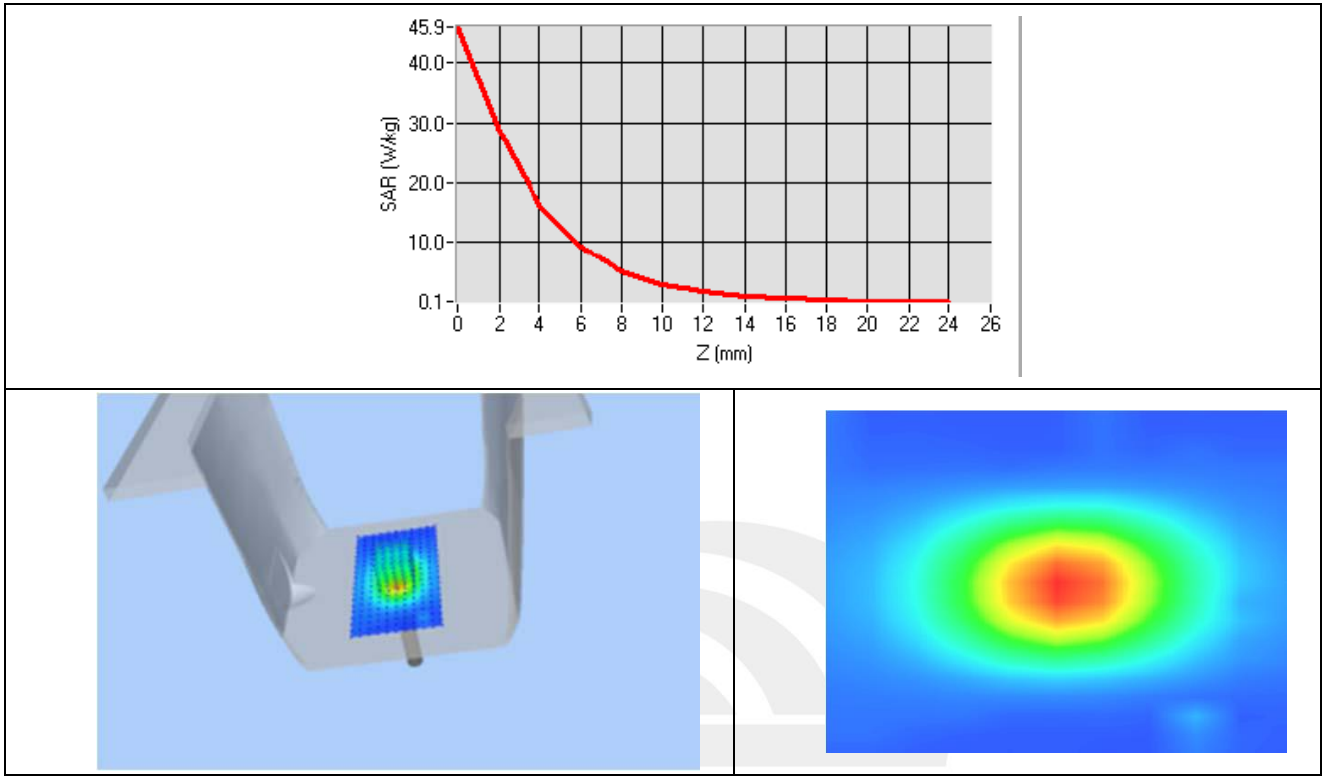

System Performance Check Data(5800MHz)

Type: Dipole measurement (Complete)


Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=4mm, dy=4mm, dz=2mm

Date of measurement: 2021-05-13

Experimental conditions.


Device Position	Validation plane
Band	5800 MHz
Channels	-
Signal	CW
Frequency (MHz)	5800
Relative permittivity	35.13
Conductivity (S/m)	5.25
Probe	SN 07/21 EPGO352
ConvF	1.64
Crest factor:	1:1

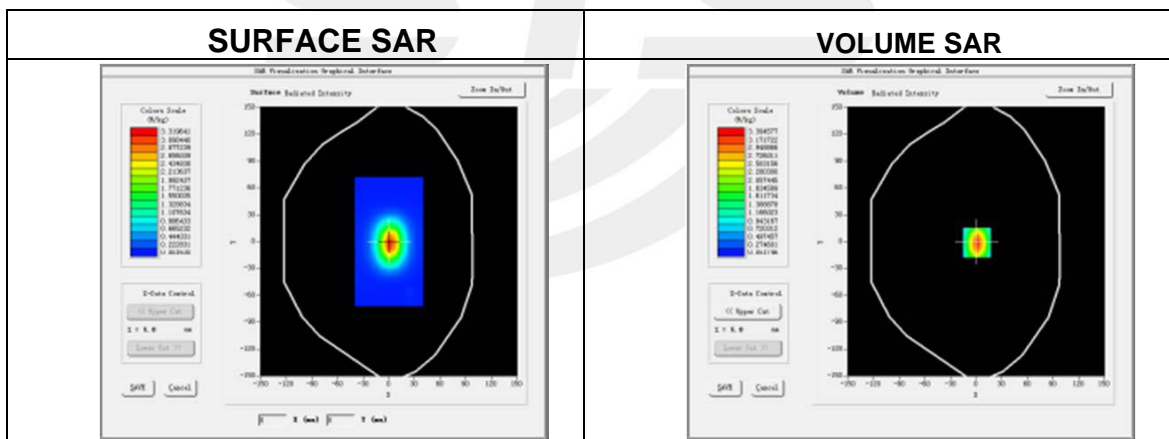

Maximum location: X=7.00, Y=2.00

SAR 10g (W/Kg)	6.183710
SAR 1g (W/Kg)	18.321027

Z Axis Scan

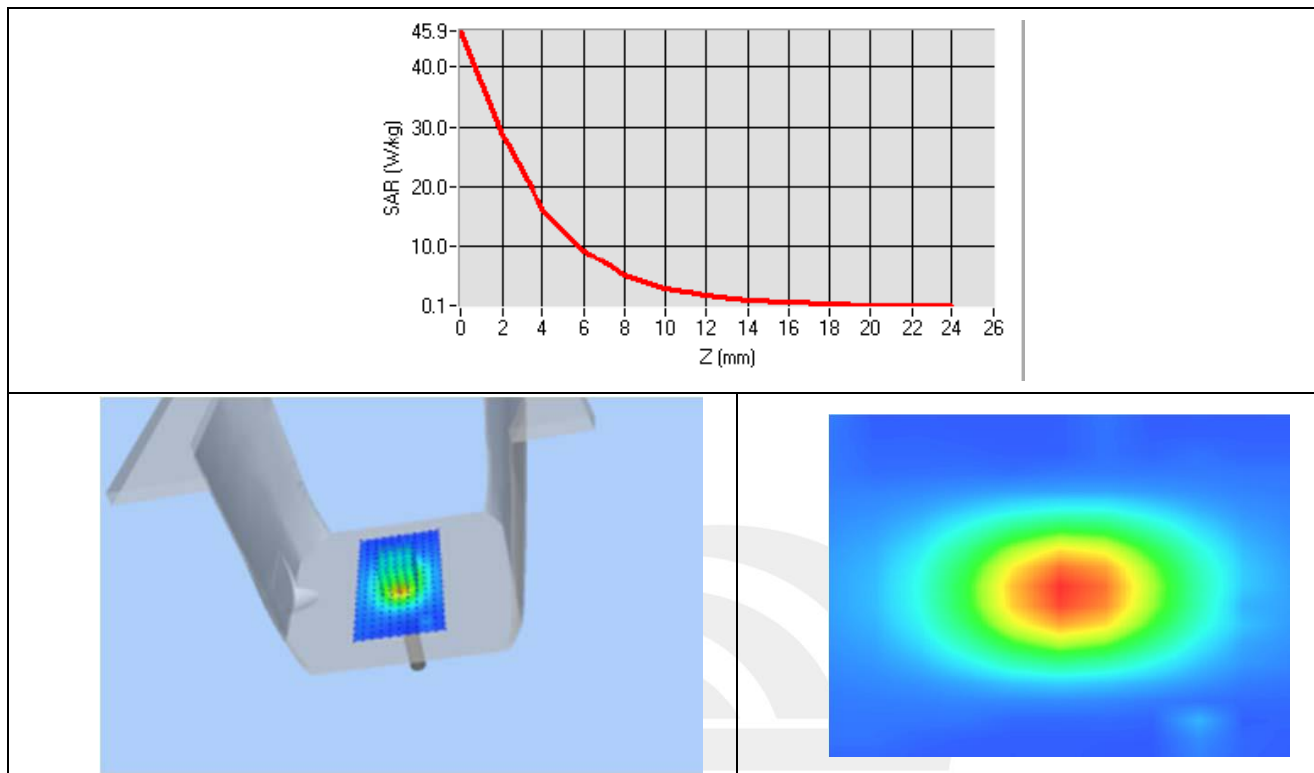


Appendix B. SAR Test Plots

Plot 1: DUT: TT1001 10.1 inch Tablet; EUT Model: TT1001V2

Test Date	2021-05-10
Probe	SN 07/21 EPGO352
Area Scan	dx=8mm, dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7,dx=8mm, dy=8mm, dz=5mm, Complete/ndx=8mm, dy=8mm, h= 5.00 mm
Phantom	Validation plane
Device Position	Back Side
Band	WCDMA II
Channels	9637
Signal	WCDMA (Crest factor: 1.0)
Frequency (MHz)	1907.4
Relative permittivity (real part)	39.57
Conductivity (S/m)	1.43

Maximum location: X=-24.00 Y=-10.00
SAR Peak: 1.05W/kg

SAR 10g (W/Kg)	0.274402
SAR 1g (W/Kg)	0.581408

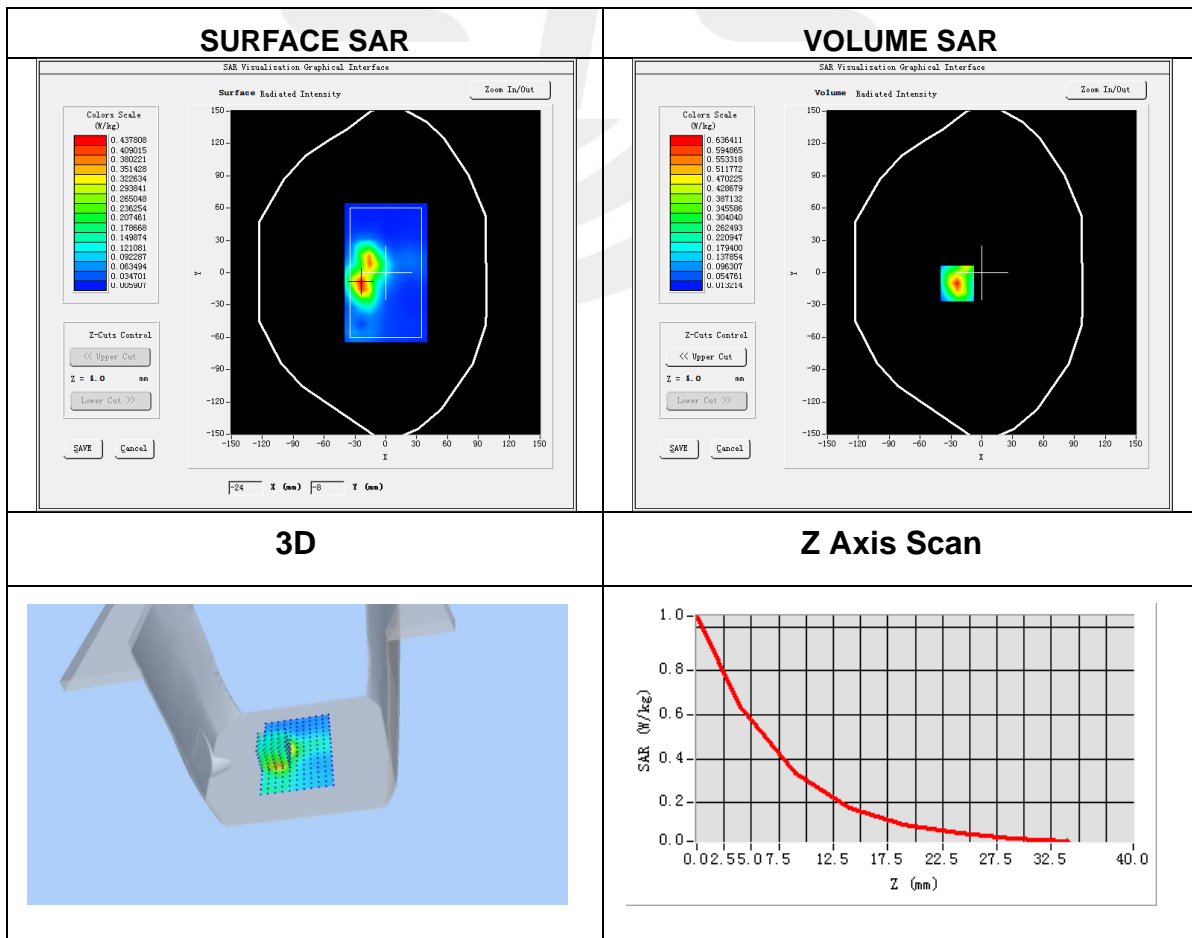


Plot 2: DUT: TT1001 10.1 inch Tablet; EUT Model: TT1001V2

Test Date	2021-05-08
Probe	SN 07/21 EPGO352
Area Scan	dx=8mm, dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7,dx=8mm, dy=8mm, dz=5mm, Complete/ndx=8mm, dy=8mm, h= 5.00 mm
Phantom	Validation plane
Device Position	Back Side
Band	WCDMA IV
Channels	1450
Signal	WCDMA (Crest factor: 1.0)
Frequency (MHz)	1740
Relative permittivity (real part)	39.89
Conductivity (S/m)	1.37

Maximum location: X=-15.00 Y=-24.00
SAR Peak: 0.87 W/kg

SAR 10g (W/Kg)	0.199560
SAR 1g (W/Kg)	0.452215

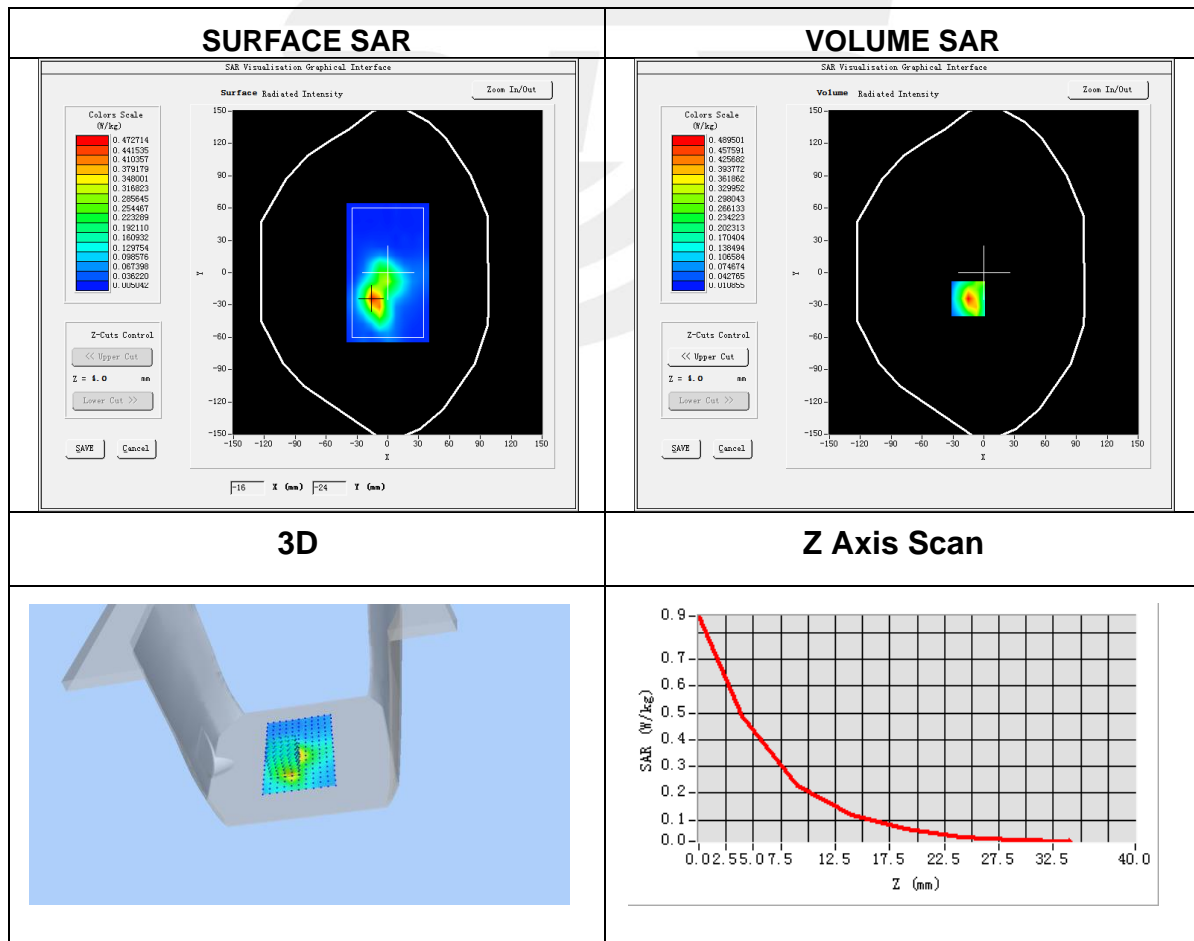


Plot 3: DUT: TT1001 10.1 inch Tablet; EUT Model: TT1001V2

Test Date	2021-05-06
Probe	SN 07/21 EPGO352
Area Scan	dx=8mm, dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7,dx=8mm, dy=8mm, dz=5mm, Complete/ndx=8mm, dy=8mm, h= 5.00 mm
Phantom	Validation plane
Device Position	Back Side
Band	WCDMA V
Channels	4233
Signal	WCDMA (Crest factor: 1.0)
Frequency (MHz)	826.6
Relative permittivity (real part)	43.39
Conductivity (S/m)	0.92

Maximum location: X=10.00 Y=-24.00

SAR Peak: 0.11 W/kg

SAR 10g (W/Kg)	0.025204
SAR 1g (W/Kg)	0.054898

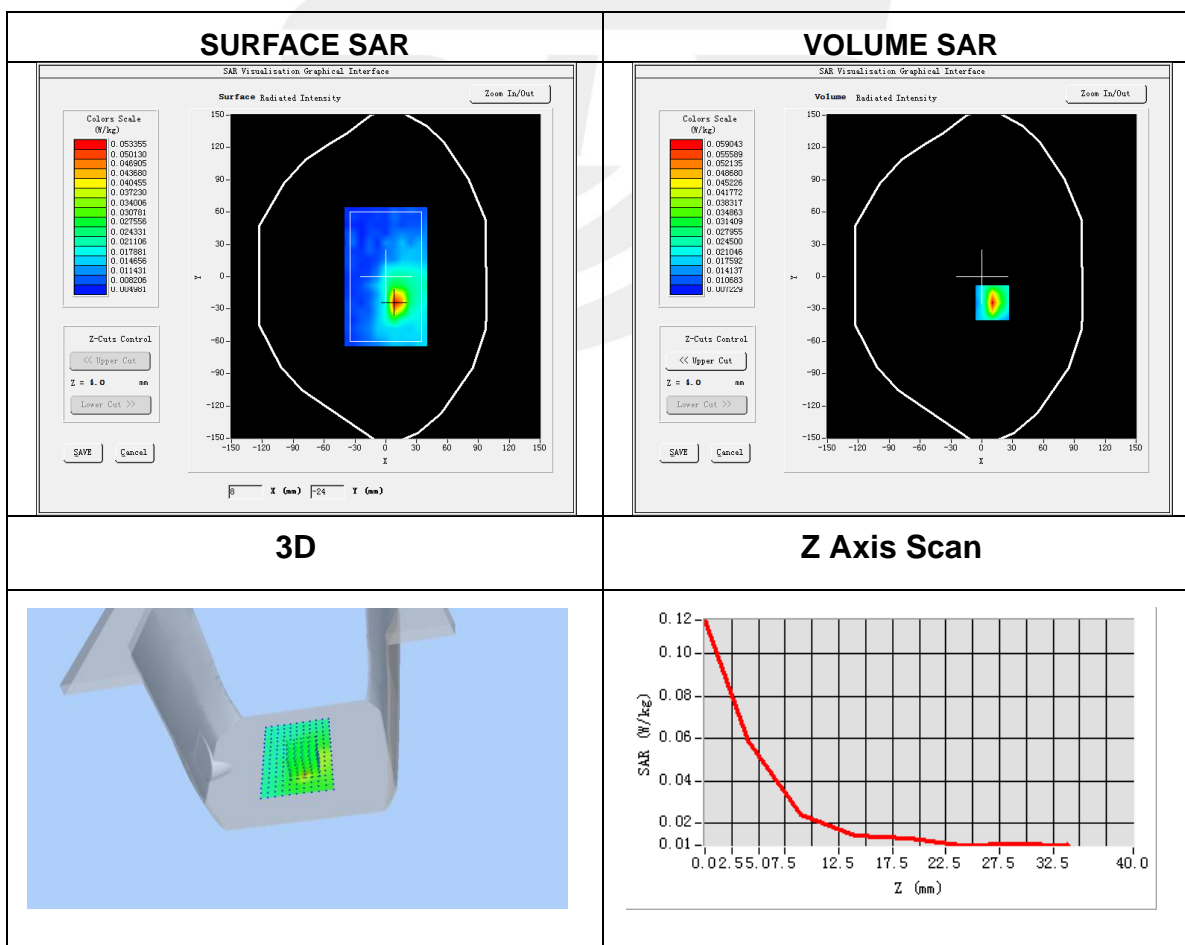


Plot 4: DUT: TT1001 10.1 inch Tablet; EUT Model: TT1001V2

Test Date	2021-05-08
Probe	SN 07/21 EPGO352
Area Scan	dx=8mm, dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7,dx=8mm, dy=8mm, dz=5mm, Complete/ndx=8mm, dy=8mm, h= 5.00 mm
Phantom	Validation plane
Device Position	Back Side
Band	LTE Band 2
Channels	18900
Signal	LTE (Crest factor: 1.0)
Frequency (MHz)	1880
Relative permittivity (real part)	39.23
Conductivity (S/m)	1.79

Maximum location: X=7.00 Y=-10.00
SAR Peak: 1.09 W/kg

SAR 10g (W/Kg)	0.238156
SAR 1g (W/Kg)	0.564668

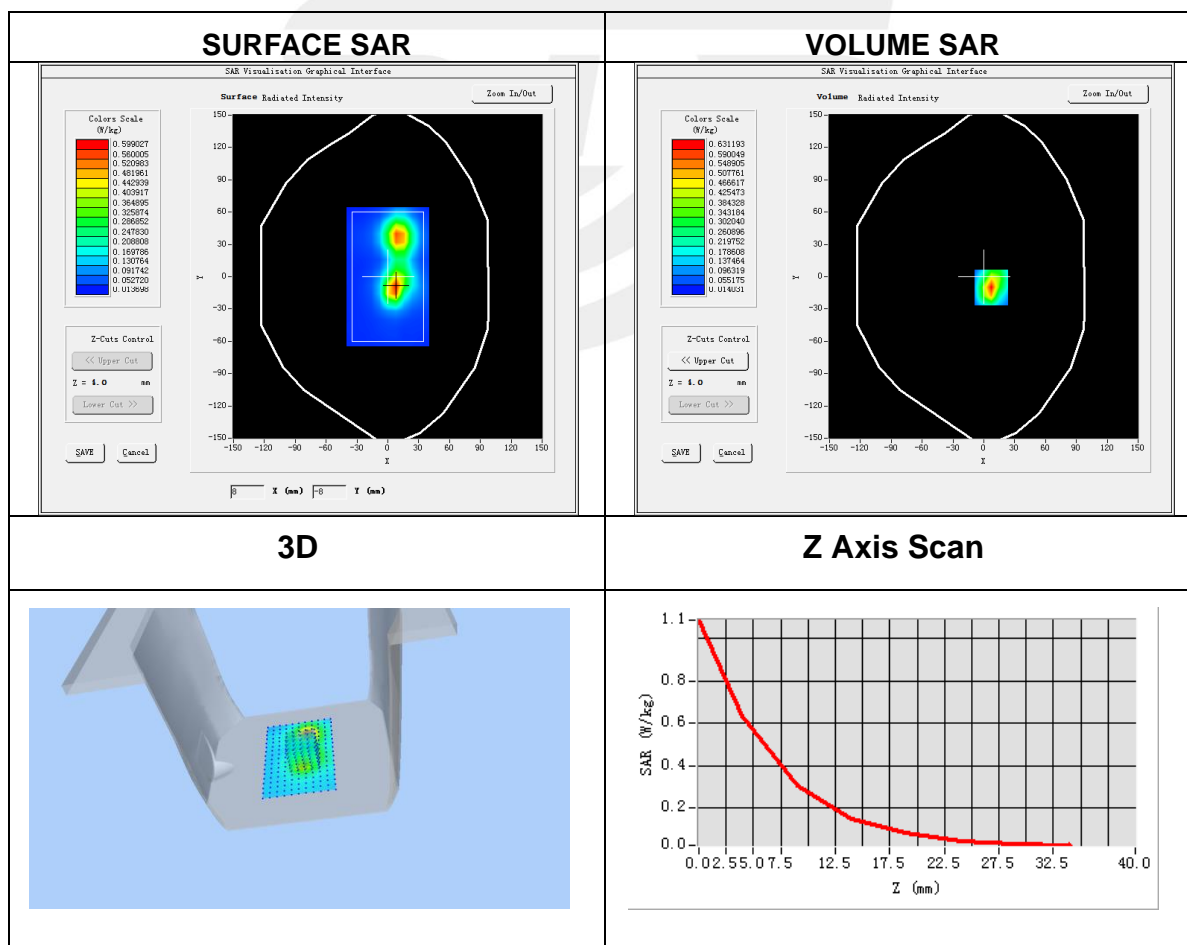


Plot 5: DUT: TT1001 10.1 inch Tablet; EUT Model: TT1001V2

Test Date	2021-05-08
Probe	SN 07/21 EPGO352
Area Scan	dx=8mm, dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7,dx=8mm, dy=8mm, dz=5mm, Complete/ndx=8mm, dy=8mm, h= 5.00 mm
Phantom	Validation plane
Device Position	Back Side
Band	LTE Band 4
Channels	20050
Signal	LTE (Crest factor: 1.0)
Frequency (MHz)	1720
Relative permittivity (real part)	39.23
Conductivity (S/m)	1.79

Maximum location: X=-18.00 Y=-16.00
SAR Peak: 1.00 W/kg

SAR 10g (W/Kg)	0.255670
SAR 1g (W/Kg)	0.544286

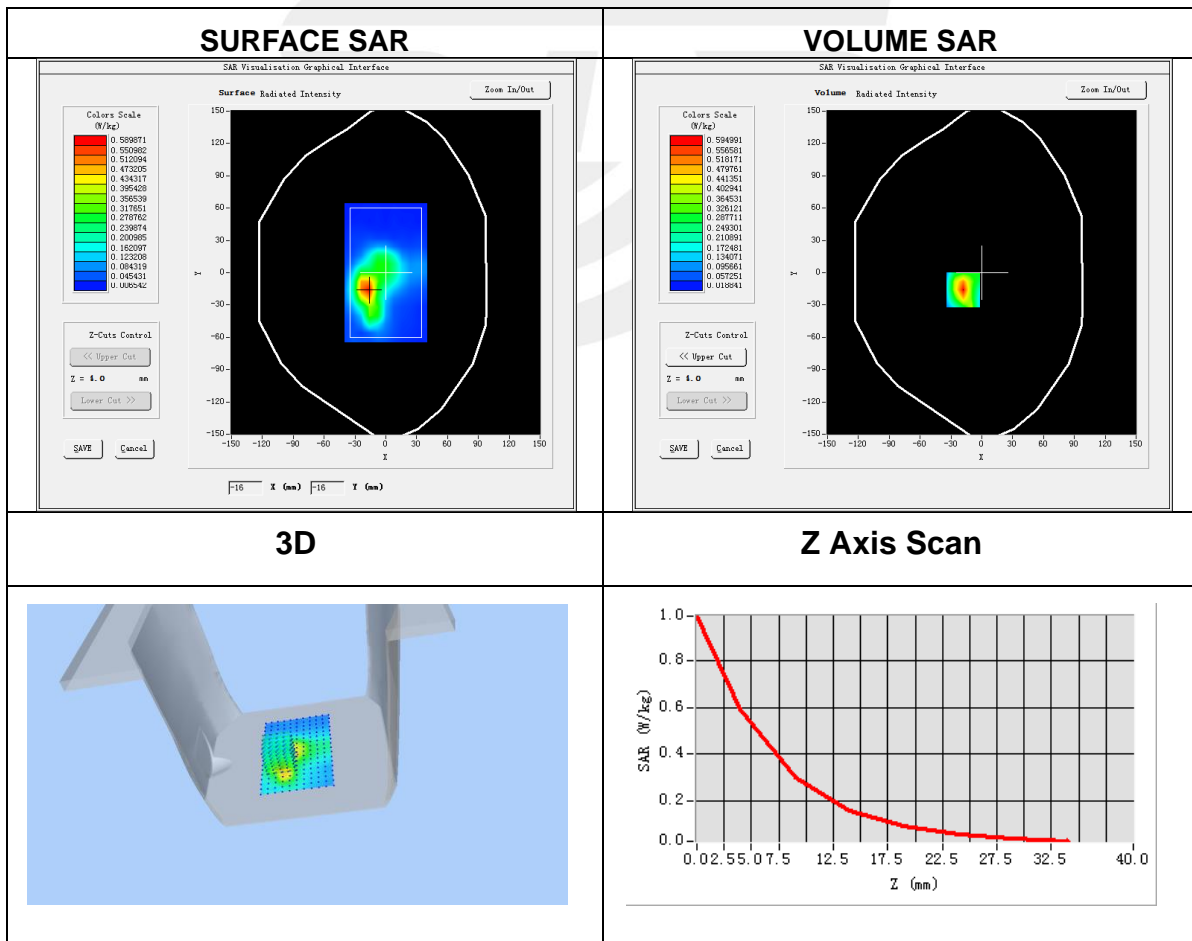


Plot 6: DUT: TT1001 10.1 inch Tablet; EUT Model: TT1001V2

Test Date	2021-05-06
Probe	SN 07/21 EPGO352
Area Scan	dx=8mm, dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7,dx=8mm, dy=8mm, dz=5mm, Complete/ndx=8mm, dy=8mm, h= 5.00 mm
Phantom	Validation plane
Device Position	Back Side
Band	LTE Band 5
Channels	20600
Signal	LTE (Crest factor: 1.0)
Frequency (MHz)	844
Relative permittivity (real part)	43.39
Conductivity (S/m)	0.92

Maximum location: X=1.00 Y=-45.00
SAR Peak: 0.07 W/kg

SAR 10g (W/Kg)	0.017284
SAR 1g (W/Kg)	0.034494

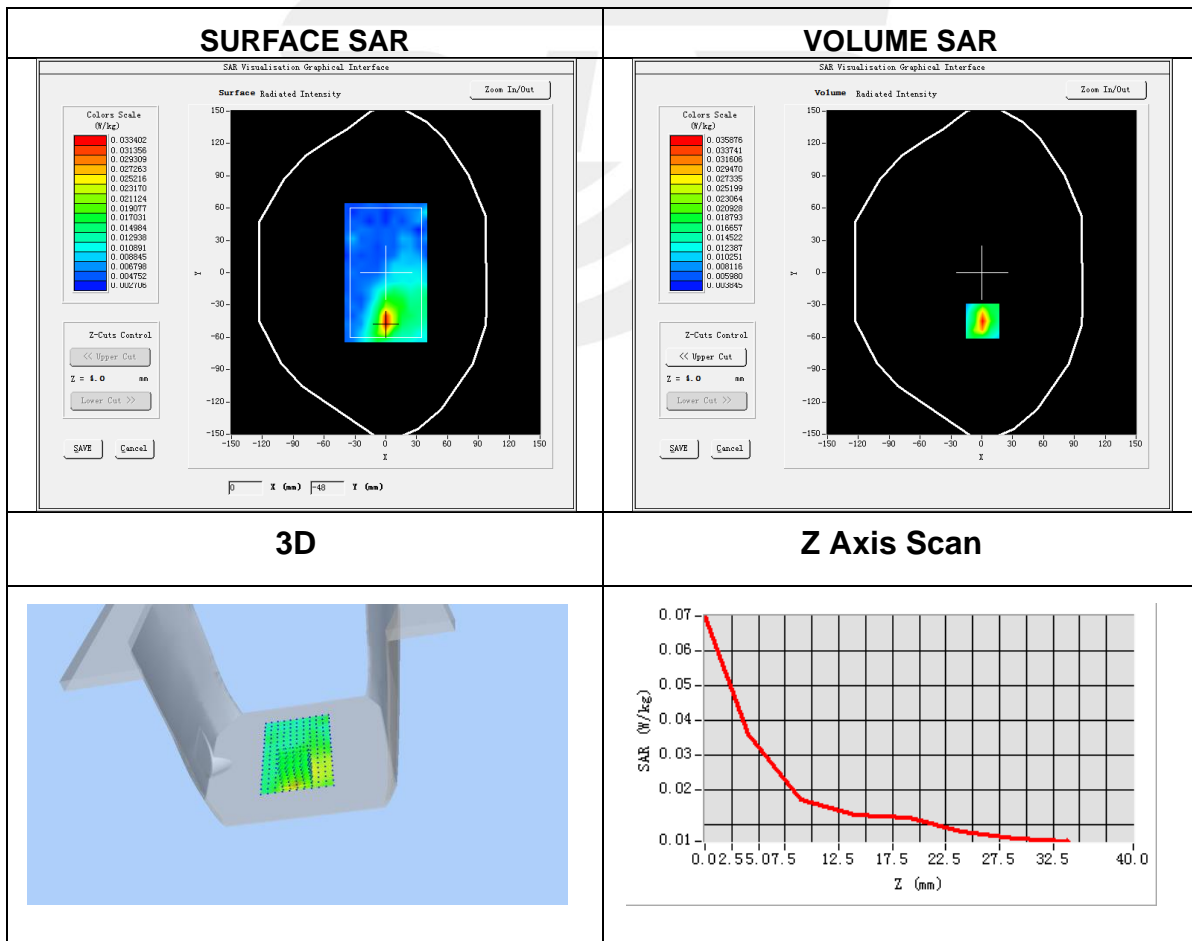


Plot 7: DUT: TT1001 10.1 inch Tablet; EUT Model: TT1001V2

Test Date	2021-04-30
Probe	SN 07/21 EPGO352
Area Scan	dx=8mm, dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7,dx=8mm, dy=8mm, dz=5mm, Complete/ndx=8mm, dy=8mm, h= 5.00 mm
Phantom	Validation plane
Device Position	Back Side
Band	LTE Band 12
Channels	23060
Signal	LTE (Crest factor: 1.0)
Frequency (MHz)	704
Relative permittivity (real part)	42.13
Conductivity (S/m)	0.91

Maximum location: X=8.00 Y=-32.00
SAR Peak: 0.21 W/kg

SAR 10g (W/Kg)	0.041066
SAR 1g (W/Kg)	0.098442

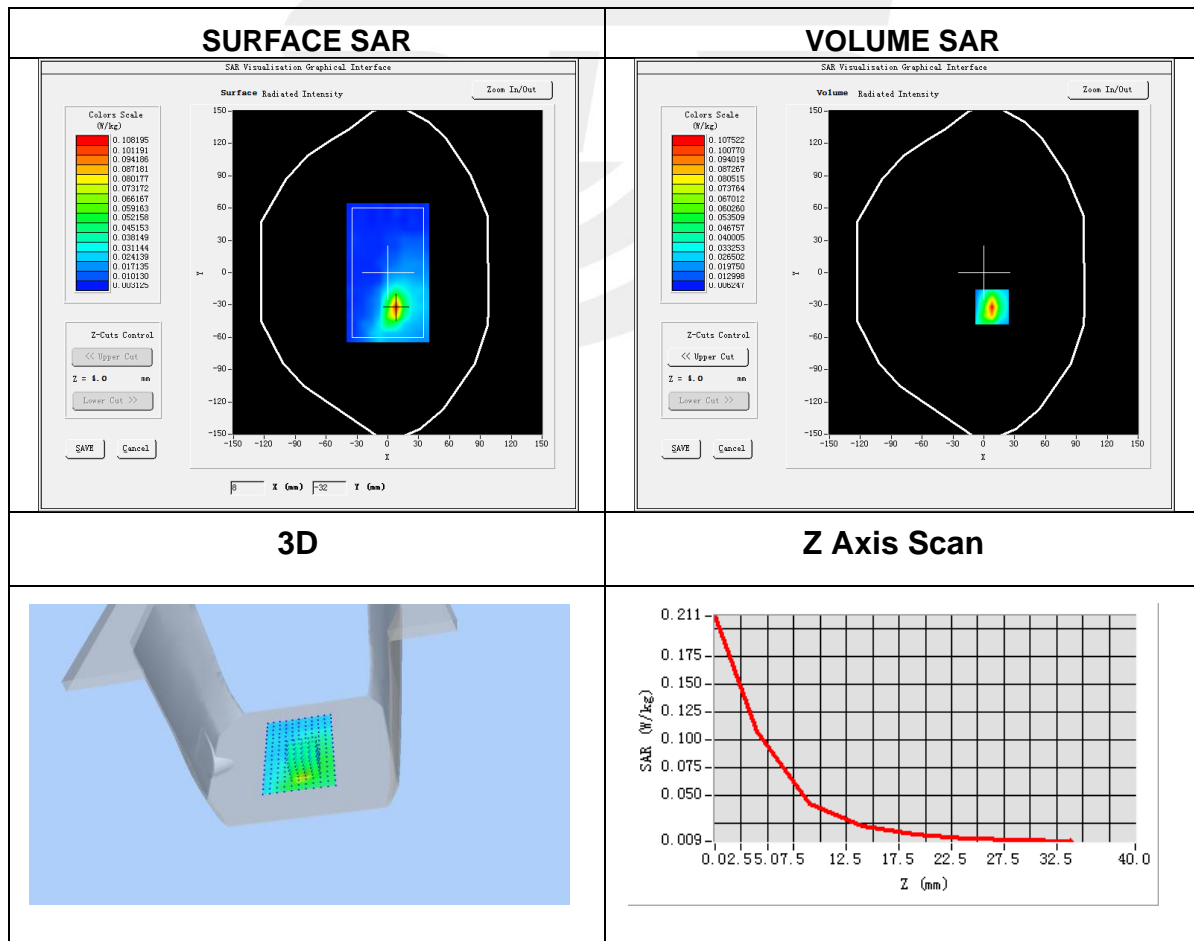


Plot 8: DUT: TT1001 10.1 inch Tablet; EUT Model: TT1001V2

Test Date	2021-04-30
Probe	SN 07/21 EPGO352
Area Scan	dx=8mm, dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7,dx=8mm, dy=8mm, dz=5mm, Complete/ndx=8mm, dy=8mm, h= 5.00 mm
Phantom	Validation plane
Device Position	Back Side
Band	LTE Band 13
Channels	23230
Signal	LTE (Crest factor: 1.0)
Frequency (MHz)	782
Relative permittivity (real part)	41.75
Conductivity (S/m)	0.90

Maximum location: X=1.00 Y=-56.00
SAR Peak: 0.12 W/kg

SAR 10g (W/Kg)	0.023995
SAR 1g (W/Kg)	0.055758

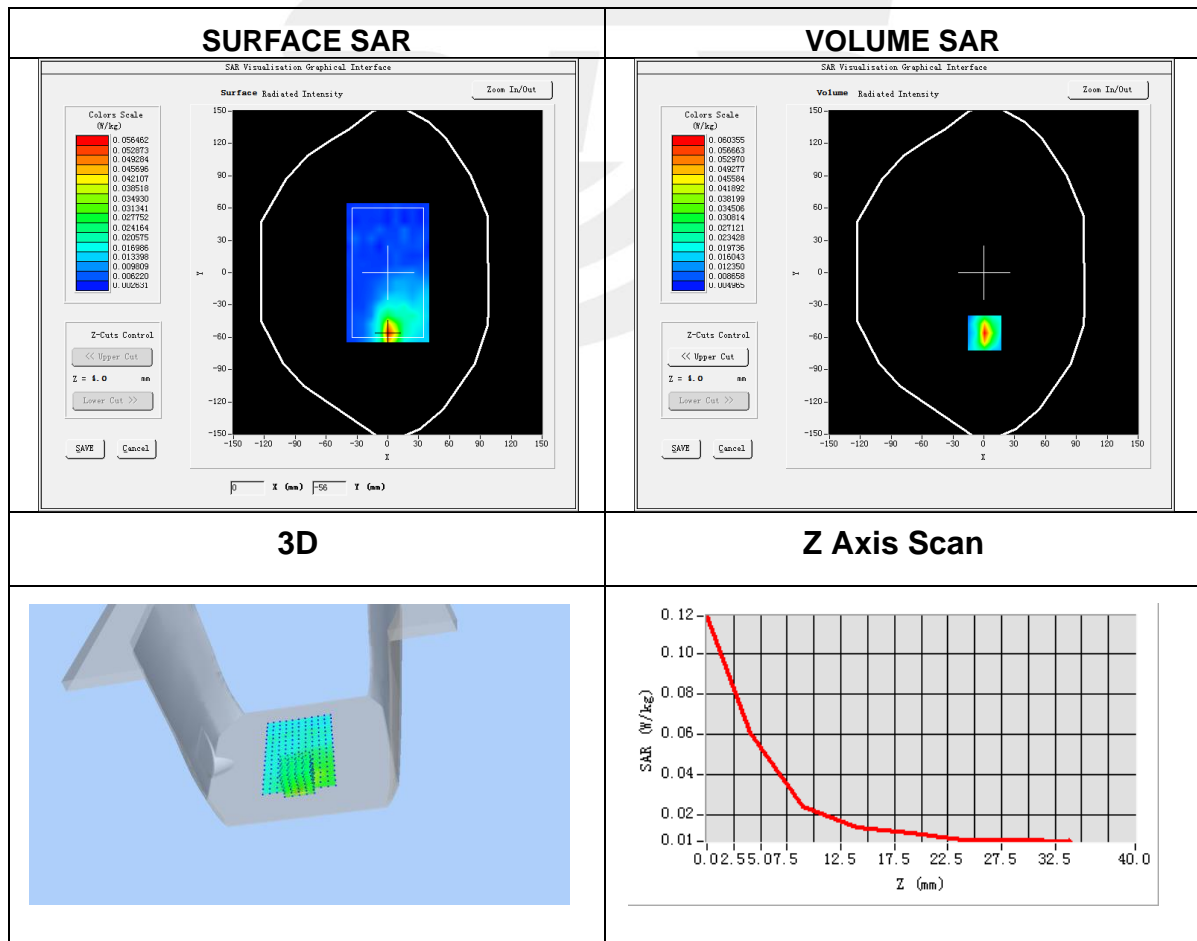


Plot 9: DUT: TT1001 10.1 inch Tablet; EUT Model: TT1001V2

Test Date	2021-04-30
Probe	SN 07/21 EPGO352
Area Scan	dx=8mm, dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7,dx=8mm, dy=8mm, dz=5mm, Complete/ndx=8mm, dy=8mm, h= 5.00 mm
Phantom	Validation plane
Device Position	Back Side
Band	LTE Band 14
Channels	23330
Signal	LTE (Crest factor: 1.0)
Frequency (MHz)	793
Relative permittivity (real part)	41.70
Conductivity (S/m)	0.90

Maximum location: X=7.00 Y=-42.00

SAR Peak: 0.10 W/Kg

SAR 10g (W/Kg)	0.022161
SAR 1g (W/Kg)	0.048622

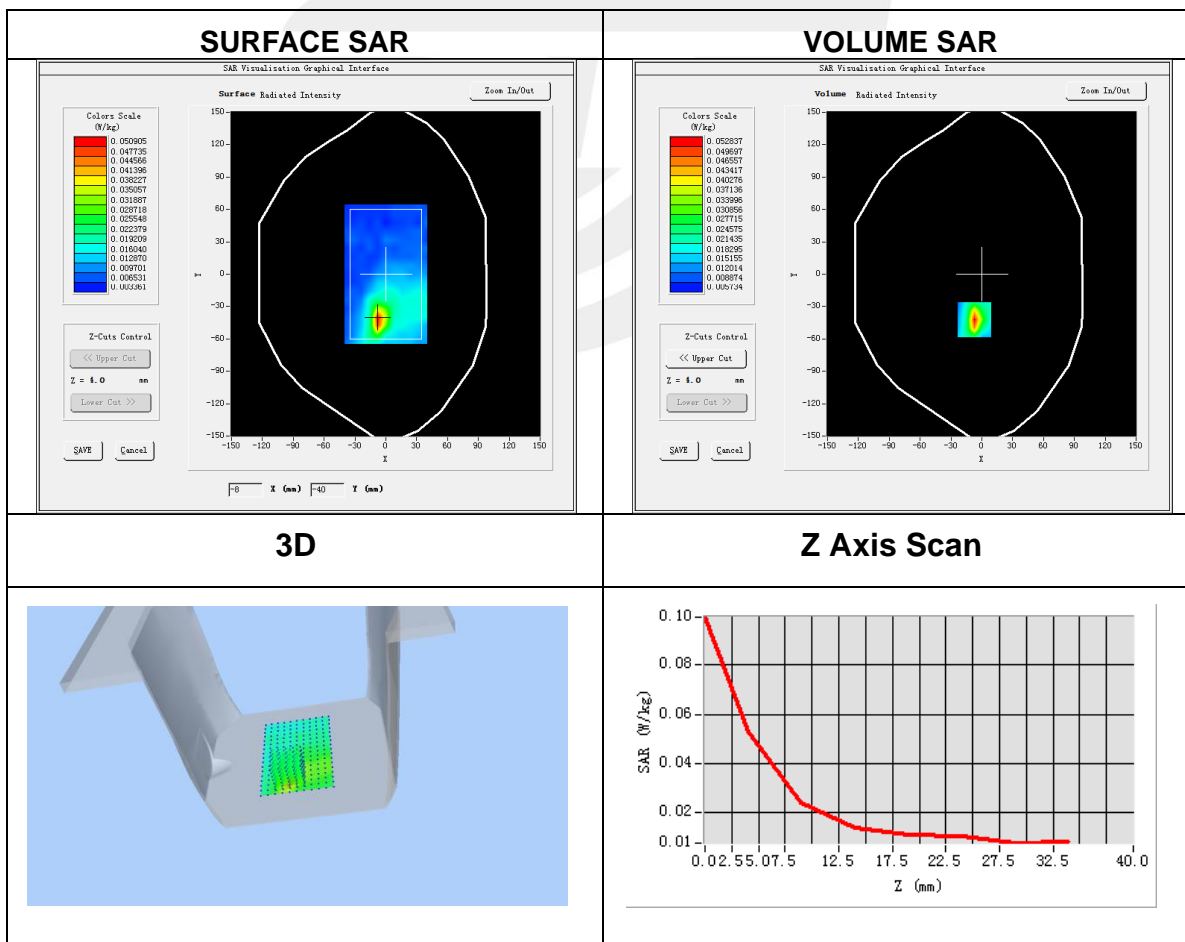


Plot 10: DUT: TT1001 10.1 inch Tablet; EUT Model: TT1001V2

Test Date	2021-05-08
Probe	SN 07/21 EPGO352
Area Scan	dx=8mm, dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7,dx=8mm, dy=8mm, dz=5mm, Complete/ndx=8mm, dy=8mm, h= 5.00 mm
Phantom	Validation plane
Device Position	Back Side
Band	LTE Band 66
Channels	132072
Signal	LTE (Crest factor: 1.0)
Frequency (MHz)	1720
Relative permittivity (real part)	40.10
Conductivity (S/m)	1.37

Maximum location: X=7.00 Y=-6.00
SAR Peak: 1.16 W/kg

SAR 10g (W/Kg)	0.299642
SAR 1g (W/Kg)	0.632138

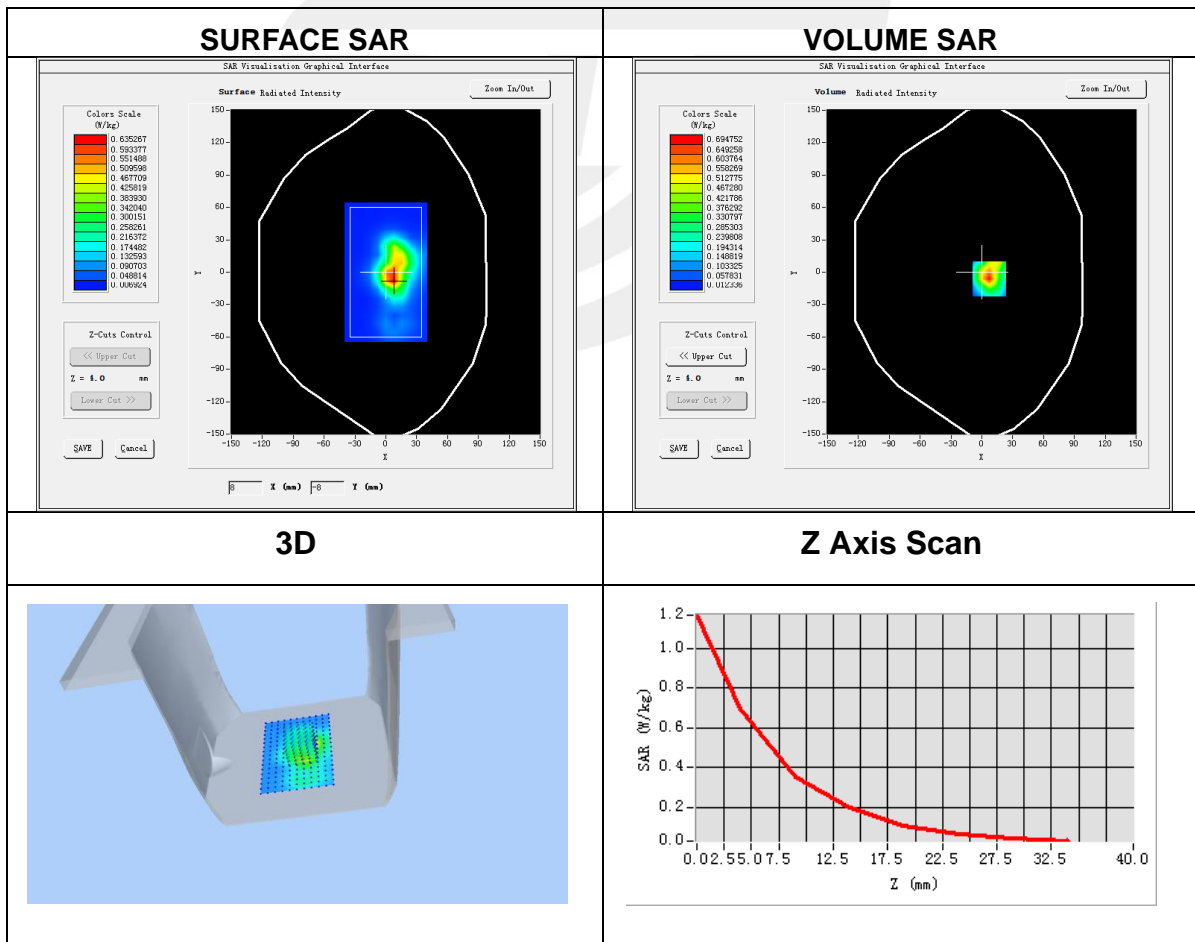


Plot 11: DUT: TT1001 10.1 inch Tablet; EUT Model: TT1001V2

Test Date	2021-05-08
Probe	SN 07/21 EPGO352
Area Scan	dx=8mm, dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7,dx=8mm, dy=8mm, dz=5mm, Complete/ndx=8mm, dy=8mm, h= 5.00 mm
Phantom	Validation plane
Device Position	Back Side
Band	LTE Band 71
Channels	133372
Signal	LTE (Crest factor: 1.0)
Frequency (MHz)	688
Relative permittivity (real part)	42.27
Conductivity (S/m)	0.93

Maximum location: X=1.00 Y=-38.00
SAR Peak: 0.37 W/kg

SAR 10g (W/Kg)	0.070638
SAR 1g (W/Kg)	0.175933

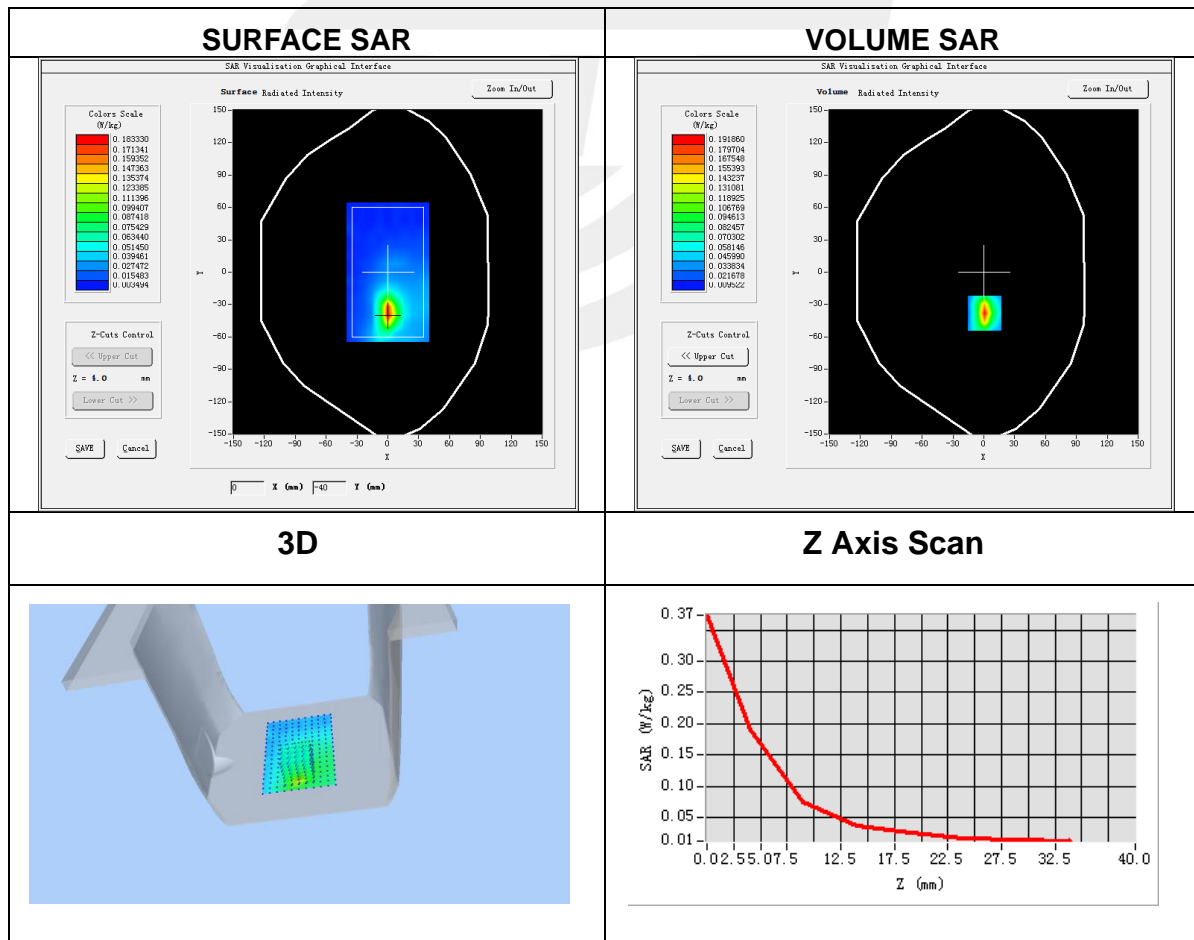


Plot 12: DUT: TT1001 10.1 inch Tablet; EUT Model: TT1001V2

Test Date	2021-05-11
Probe	SN 07/21 EPGO352
Area Scan	dx=8mm, dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7,dx=8mm, dy=8mm, dz=5mm, Complete/ndx=8mm, dy=8mm, h= 5.00 mm
Phantom	Validation plane
Device Position	Top Side
Band	IEEE 802.11b ANT 1
Channels	6
Signal	IEEE802.11b (Crest factor: 1.0)
Frequency (MHz)	2437
Relative permittivity (real part)	39.23
Conductivity (S/m)	1.79

Maximum location: X=1.00 Y=8.00
SAR Peak: 1.34W/kg

SAR 10g (W/Kg)	0.319419
SAR 1g (W/Kg)	0.727097

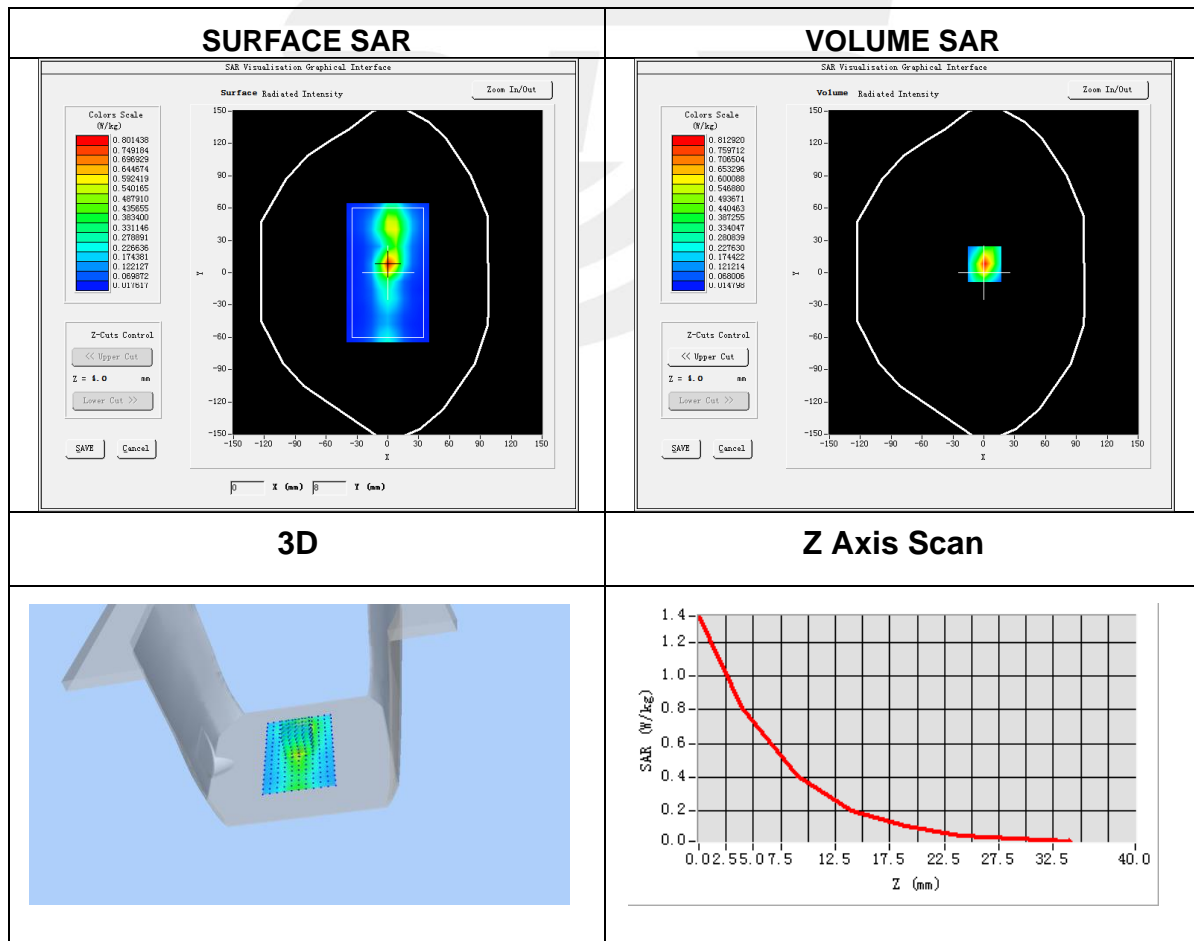


Plot 13: DUT: TT1001 10.1 inch Tablet; EUT Model: TT1001V2

Test Date	2021-05-11
Probe	SN 07/21 EPGO352
Area Scan	dx=8mm, dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7,dx=8mm, dy=8mm, dz=5mm, Complete/ndx=8mm, dy=8mm, h= 5.00 mm
Phantom	Validation plane
Device Position	Top Side
Band	IEEE 802.11b ANT 2
Channels	6
Signal	IEEE802.11b (Crest factor: 1.0)
Frequency (MHz)	2437
Relative permittivity (real part)	39.23
Conductivity (S/m)	1.79

Maximum location: X=7.00 Y=-10.00
SAR Peak: 1.09 W/kg

SAR 10g (W/Kg)	0.238156
SAR 1g (W/Kg)	0.564668

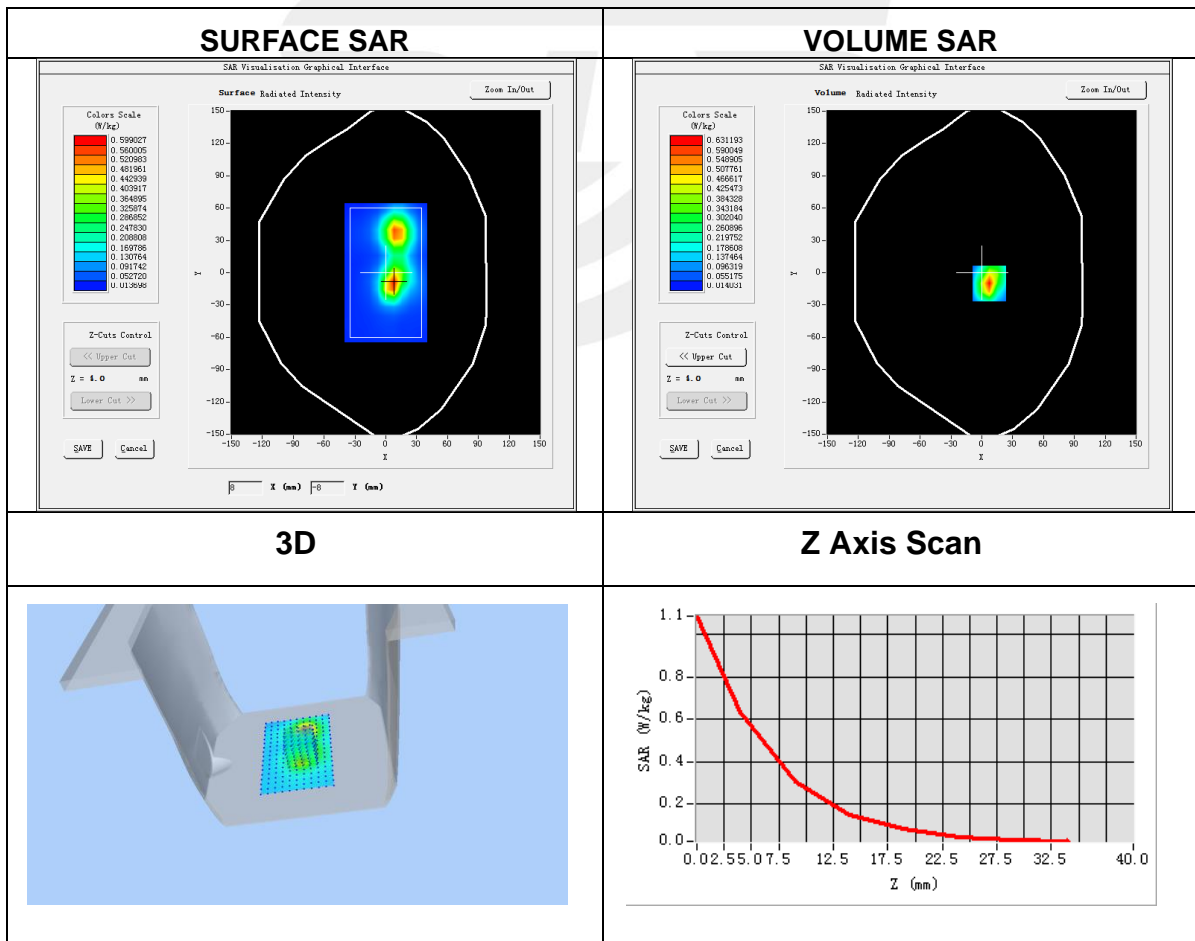


Plot 14: DUT: TT1001 10.1 inch Tablet; EUT Model: TT1001V2

Test Date	2021-05-11
Probe	SN 07/21 EPGO352
Area Scan	dx=8mm, dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7,dx=8mm, dy=8mm, dz=5mm, Complete/ndx=8mm, dy=8mm, h= 5.00 mm
Phantom	Validation plane
Device Position	Back Side
Band	IEEE 802.11n20 ANT 1
Channels	6
Signal	IEEE802.11n20 (Crest factor: 1.0)
Frequency (MHz)	2437
Relative permittivity (real part)	39.23
Conductivity (S/m)	1.79

Maximum location: X=2.00 Y=16.00
SAR Peak: 0.56 W/kg

SAR 10g (W/Kg)	0.156964
SAR 1g (W/Kg)	0.316230

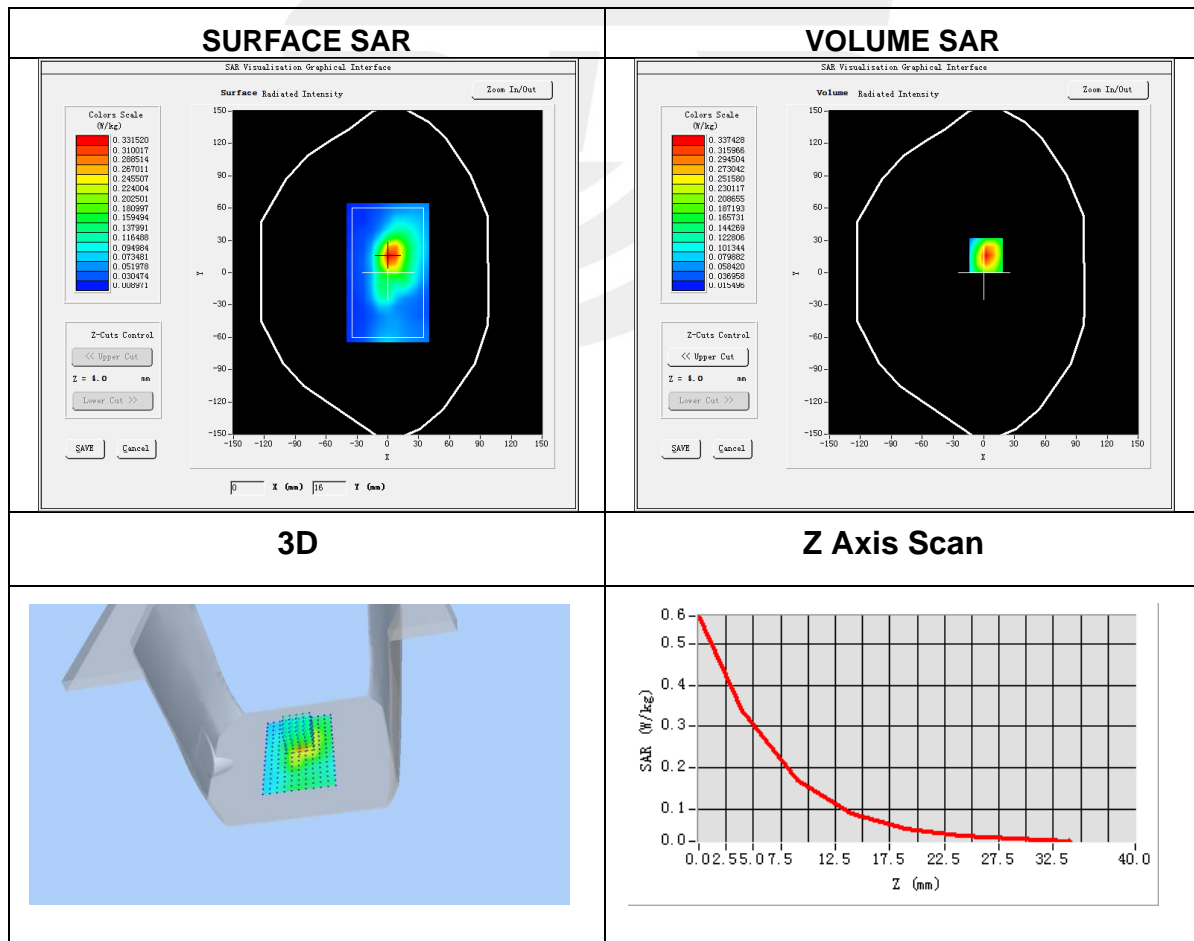


Plot 15: DUT: TT1001 10.1 inch Tablet; EUT Model: TT1001V2

Test Date	2021-05-11
Probe	SN 07/21 EPGO352
Area Scan	dx=8mm, dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7,dx=8mm, dy=8mm, dz=5mm, Complete/ndx=8mm, dy=8mm, h= 5.00 mm
Phantom	Validation plane
Device Position	Top Side
Band	IEEE 802.11n20 ANT 2
Channels	6
Signal	IEEE802.11n20 (Crest factor: 1.0)
Frequency (MHz)	2437
Relative permittivity (real part)	39.23
Conductivity (S/m)	1.79

Maximum location: X=1.00 Y=16.00
SAR Peak: 0.47W/kg

SAR 10g (W/Kg)	0.139517
SAR 1g (W/Kg)	0.278933

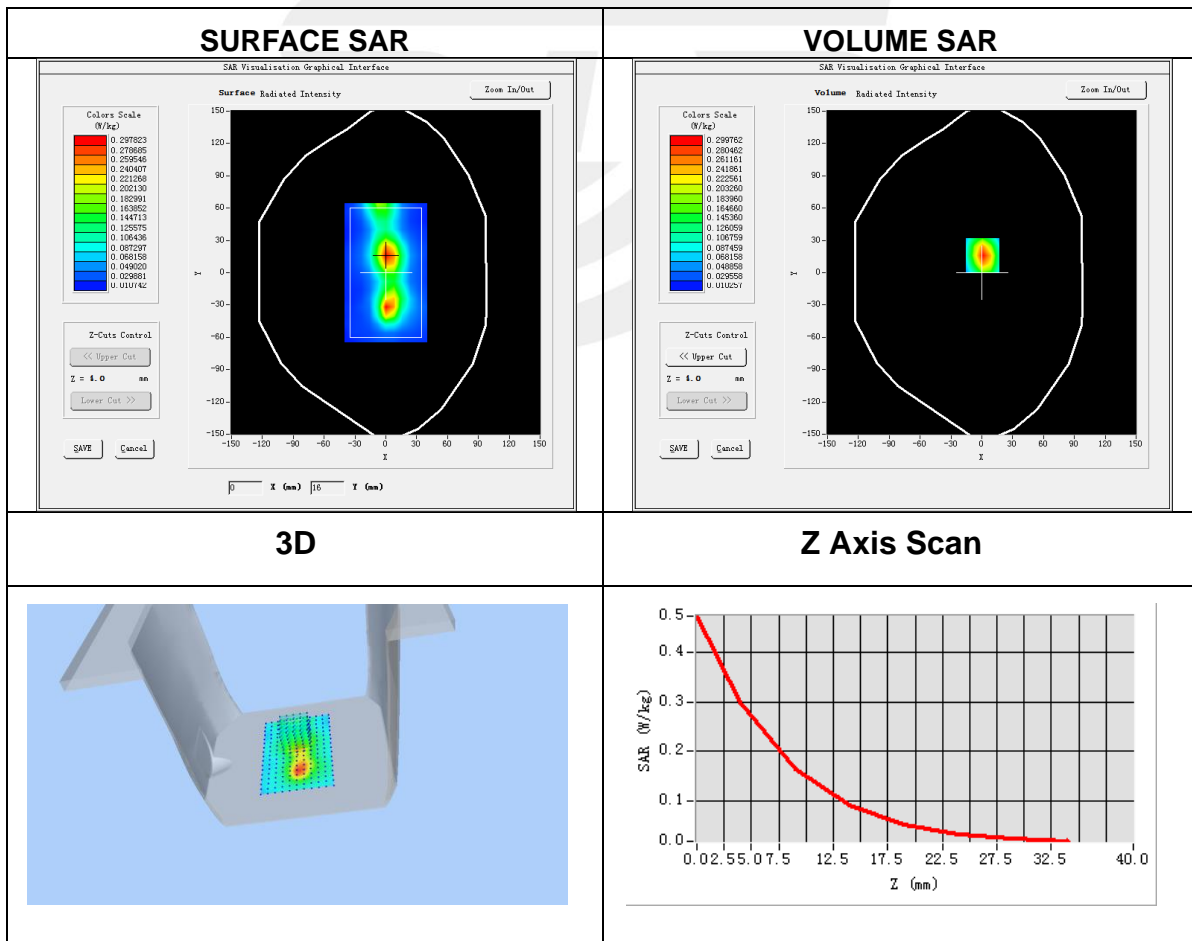


Plot 16: DUT: TT1001 10.1 inch Tablet; EUT Model: TT1001V2

Test Date	2021-05-12
Probe	SN 07/21 EPGO352
Area Scan	dx=8mm, dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7,dx=8mm, dy=8mm, dz=5mm, Complete/ndx=8mm, dy=8mm, h= 5.00 mm
Phantom	Validation plane
Device Position	Top Side
Band	IEEE 802.11a ANT 1
Channels	36
Signal	IEEE802.11a (Crest factor: 1.0)
Frequency (MHz)	5180
Relative permittivity (real part)	35.36
Conductivity (S/m)	5.22

Maximum location: X=2.00 Y=-40.00
SAR Peak: 1.86W/kg

SAR 10g (W/Kg)	0.177344
SAR 1g (W/Kg)	0.562935

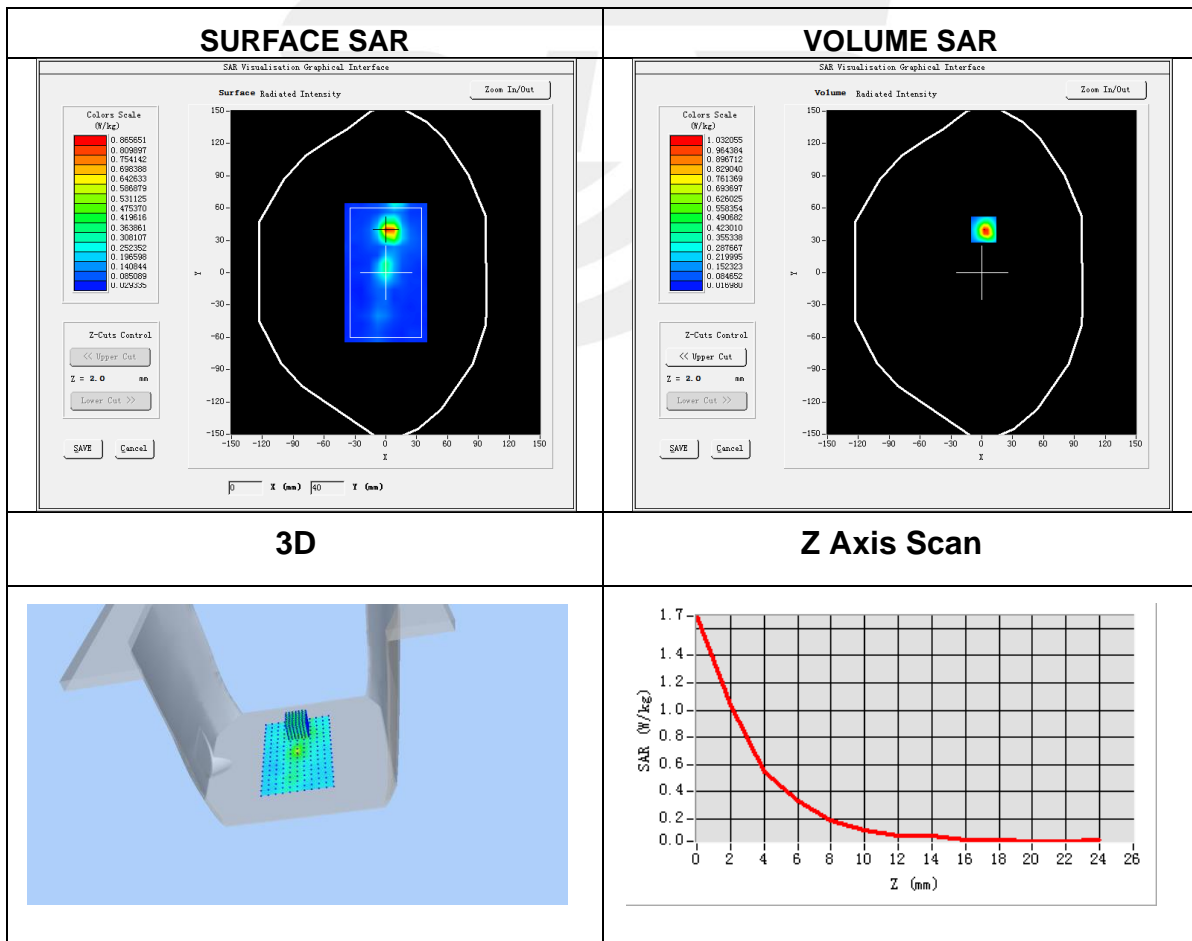


Plot 17: DUT: TT1001 10.1 inch Tablet; EUT Model: TT1001V2

Test Date	2021-05-12
Probe	SN 07/21 EPGO352
Area Scan	dx=8mm, dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7,dx=8mm, dy=8mm, dz=5mm, Complete/ndx=8mm, dy=8mm, h= 5.00 mm
Phantom	Validation plane
Device Position	Top Side
Band	IEEE 802.11a ANT 1
Channels	48
Signal	IEEE802.11a (Crest factor: 1.0)
Frequency (MHz)	5240
Relative permittivity (real part)	35.36
Conductivity (S/m)	5.22

Maximum location: X=0.00 Y=-8.00
SAR Peak: 3.18W/kg

SAR 10g (W/Kg)	0.234794
SAR 1g (W/Kg)	0.874744

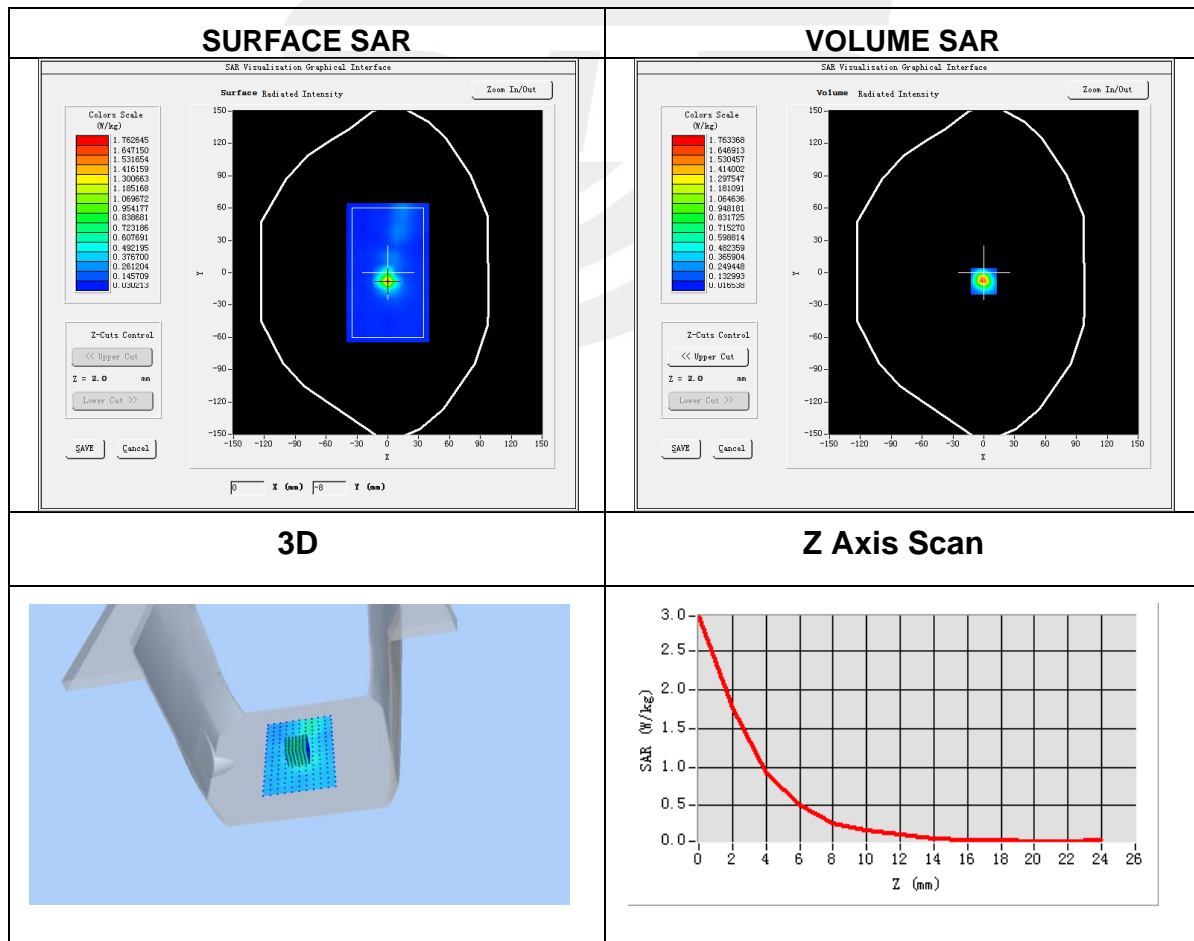


Plot 18: DUT: TT1001 10.1 inch Tablet; EUT Model: TT1001V2

Test Date	2021-05-12
Probe	SN 07/21 EPGO352
Area Scan	dx=8mm, dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7,dx=8mm, dy=8mm, dz=5mm, Complete/ndx=8mm, dy=8mm, h= 5.00 mm
Phantom	Validation plane
Device Position	Top Side
Band	IEEE 802.11n20 ANT 1
Channels	36
Signal	IEEE802.11n20 (Crest factor: 1.0)
Frequency (MHz)	5180
Relative permittivity (real part)	35.36
Conductivity (S/m)	5.22

Maximum location: X=-10.00 Y=8.00
SAR Peak: 0.94 W/kg

SAR 10g (W/Kg)	0.102888
SAR 1g (W/Kg)	0.295009

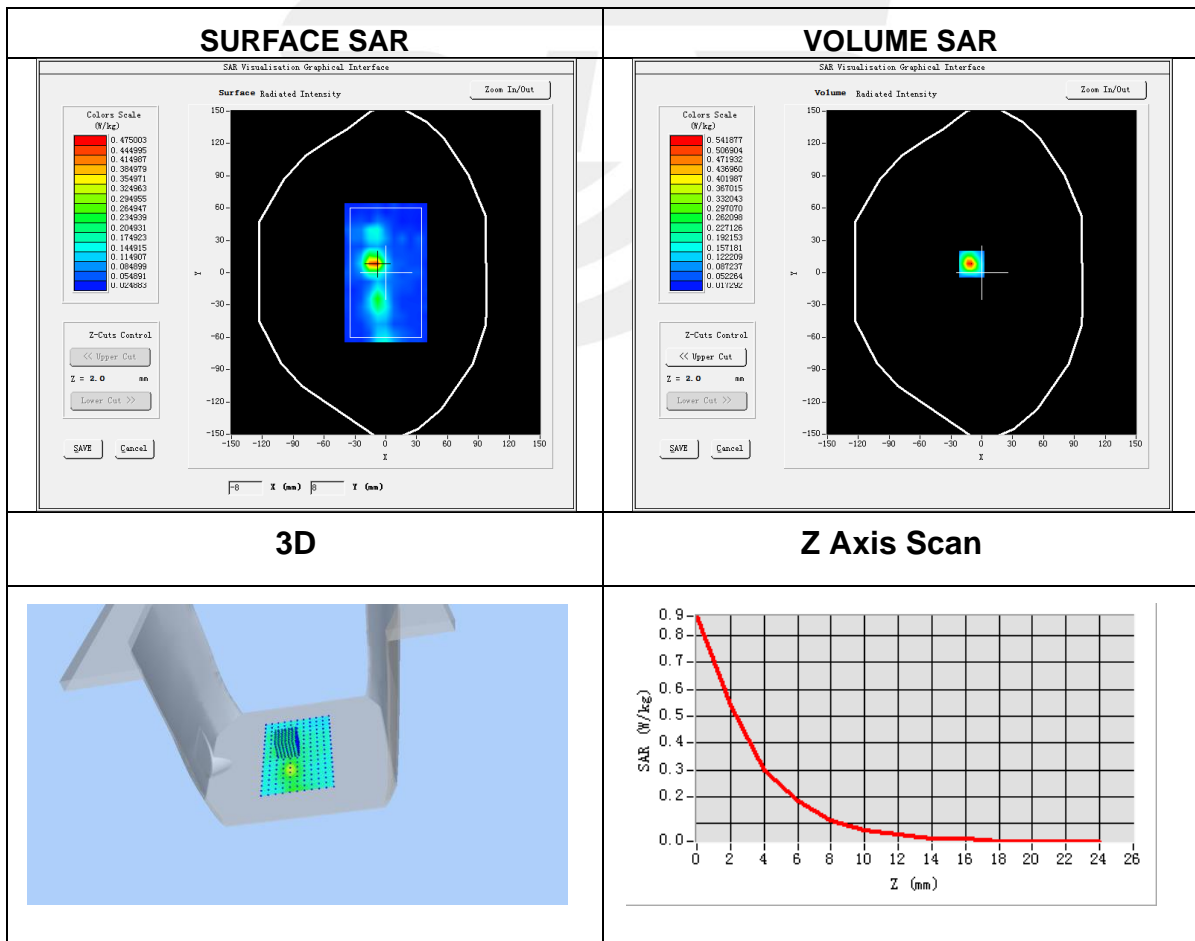


Plot 19: DUT: TT1001 10.1 inch Tablet; EUT Model: TT1001V2

Test Date	2021-05-12
Probe	SN 07/21 EPGO352
Area Scan	dx=8mm, dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7, dx=8mm, dy=8mm, dz=5mm, Complete/ndx=8mm, dy=8mm, h= 5.00 mm
Phantom	Validation plane
Device Position	Top Side
Band	IEEE 802.11n20 ANT 2
Channels	36
Signal	IEEE802.11n20 (Crest factor: 1.0)
Frequency (MHz)	5180
Relative permittivity (real part)	35.36
Conductivity (S/m)	5.22

Maximum location: X=0.00 Y=-1.00
SAR Peak: 1.73W/kg

SAR 10g (W/Kg)	0.143836
SAR 1g (W/Kg)	0.487153

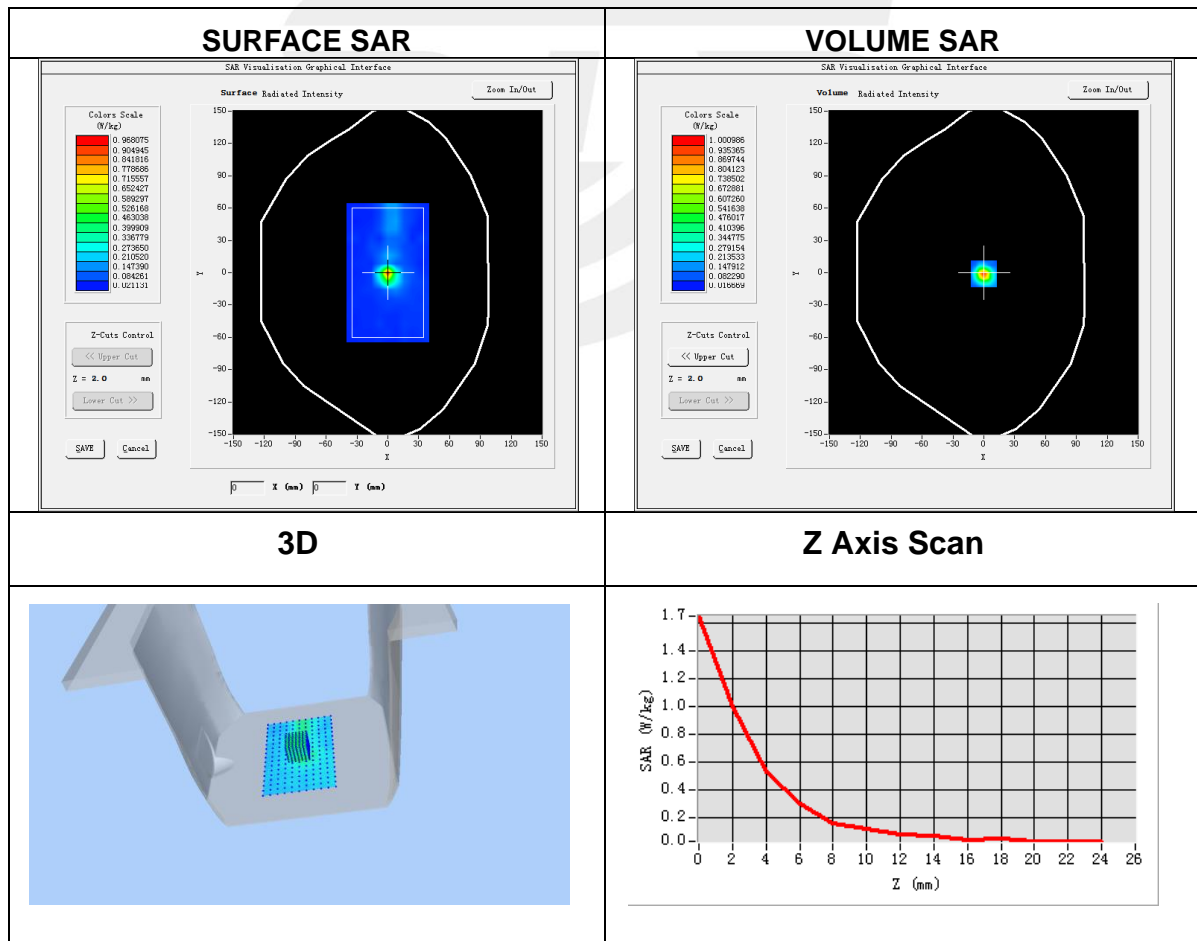


Plot 20: DUT: TT1001 10.1 inch Tablet; EUT Model: TT1001V2

Test Date	2021-05-13
Probe	SN 07/21 EPGO352
Area Scan	dx=8mm, dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7,dx=8mm, dy=8mm, dz=5mm, Complete/ndx=8mm, dy=8mm, h= 5.00 mm
Phantom	Validation plane
Device Position	Top Side
Band	IEEE 802.11a ANT 1
Channels	165
Signal	IEEE802.11a (Crest factor: 1.0)
Frequency (MHz)	5825
Relative permittivity (real part)	35.36
Conductivity (S/m)	5.22

Maximum location: X=-5.00 Y=33.00
SAR Peak: 1.03 W/kg

SAR 10g (W/Kg)	0.125047
SAR 1g (W/Kg)	0.326013

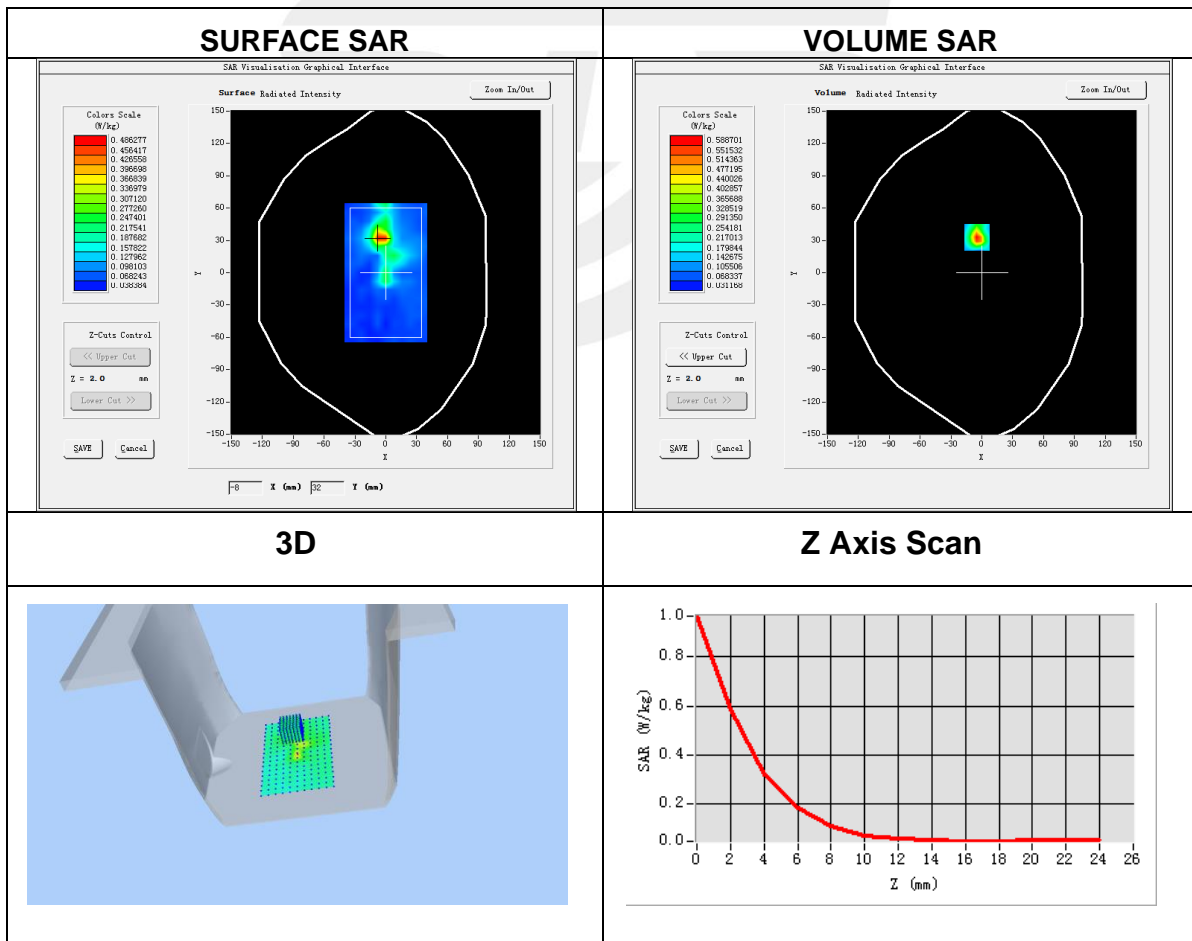


Plot 21: DUT: TT1001 10.1 inch Tablet; EUT Model: TT1001V2

Test Date	2021-05-12
Probe	SN 07/21 EPGO352
Area Scan	dx=8mm, dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7,dx=8mm, dy=8mm, dz=5mm, Complete/ndx=8mm, dy=8mm, h= 5.00 mm
Phantom	Validation plane
Device Position	Top Side
Band	IEEE 802.11a ANT 1
Channels	157
Signal	IEEE802.11a (Crest factor: 1.0)
Frequency (MHz)	5785
Relative permittivity (real part)	35.36
Conductivity (S/m)	5.22

Maximum location: X=-1.00 Y=-16.00
SAR Peak: 2.03 W/kg

SAR 10g (W/Kg)	0.154112
SAR 1g (W/Kg)	0.536956

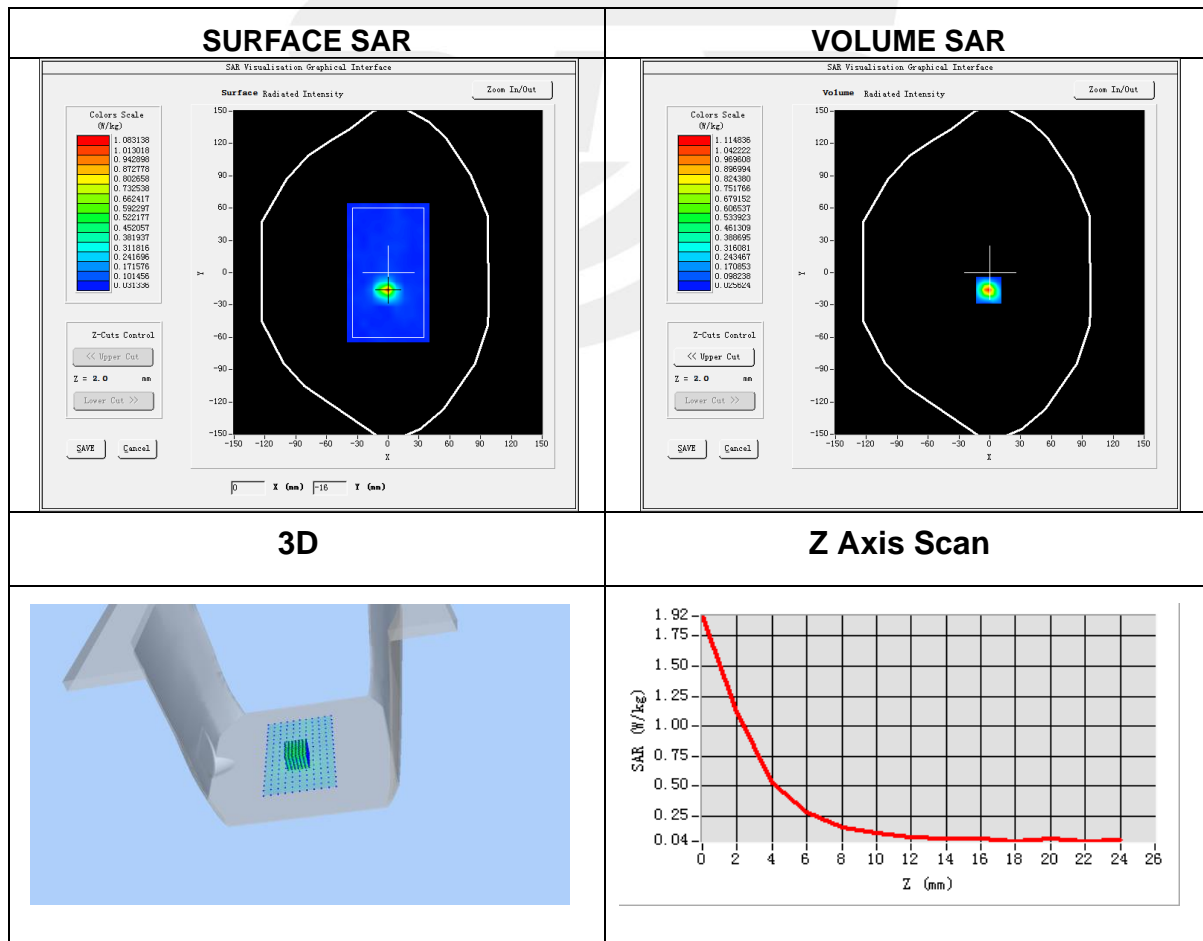


Plot 22: DUT: TT1001 10.1 inch Tablet; EUT Model: TT1001V2

Test Date	2021-05-12
Probe	SN 07/21 EPGO352
Area Scan	dx=8mm, dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7,dx=8mm, dy=8mm, dz=5mm, Complete/ndx=8mm, dy=8mm, h= 5.00 mm
Phantom	Validation plane
Device Position	Top Side
Band	IEEE 802.11n20 ANT 1
Channels	165
Signal	IEEE802.11n20 (Crest factor: 1.0)
Frequency (MHz)	5825
Relative permittivity (real part)	35.36
Conductivity (S/m)	5.22

Maximum location: X=12.00 Y=-14.00
SAR Peak: 0.29 W/kg

SAR 10g (W/Kg)	0.061082
SAR 1g (W/Kg)	0.119994

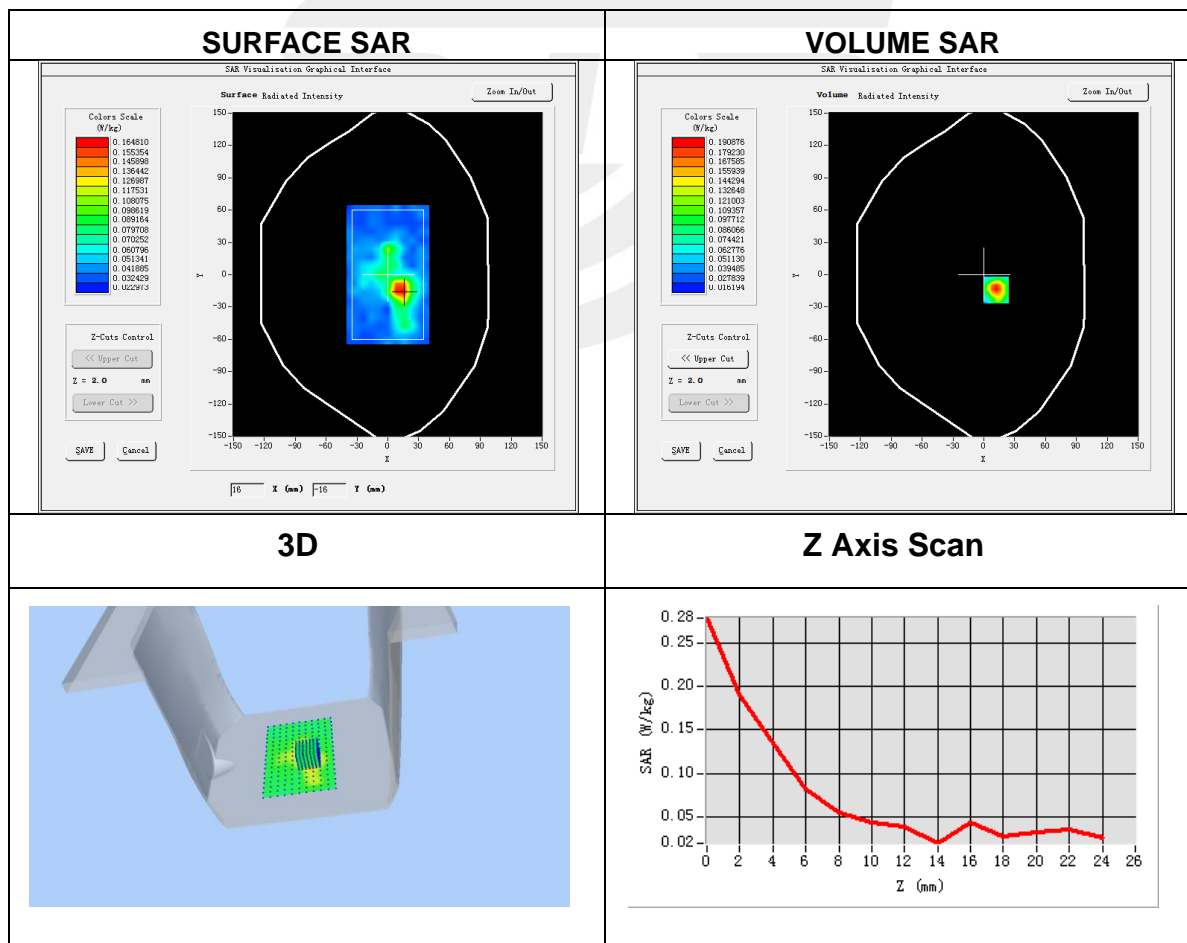


Plot 23: DUT: TT1001 10.1 inch Tablet; EUT Model: TT1001V2

Test Date	2021-05-12
Probe	SN 07/21 EPGO352
Area Scan	dx=8mm, dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7,dx=8mm, dy=8mm, dz=5mm, Complete/ndx=8mm, dy=8mm, h= 5.00 mm
Phantom	Validation plane
Device Position	Top Side
Band	IEEE 802.11n20 ANT 2
Channels	165
Signal	IEEE802.11n20 (Crest factor: 1.0)
Frequency (MHz)	5825
Relative permittivity (real part)	35.36
Conductivity (S/m)	5.22

Maximum location: X=1.00 Y=23.00
SAR Peak: 0.49W/kg

SAR 10g (W/Kg)	0.066173
SAR 1g (W/Kg)	0.161517

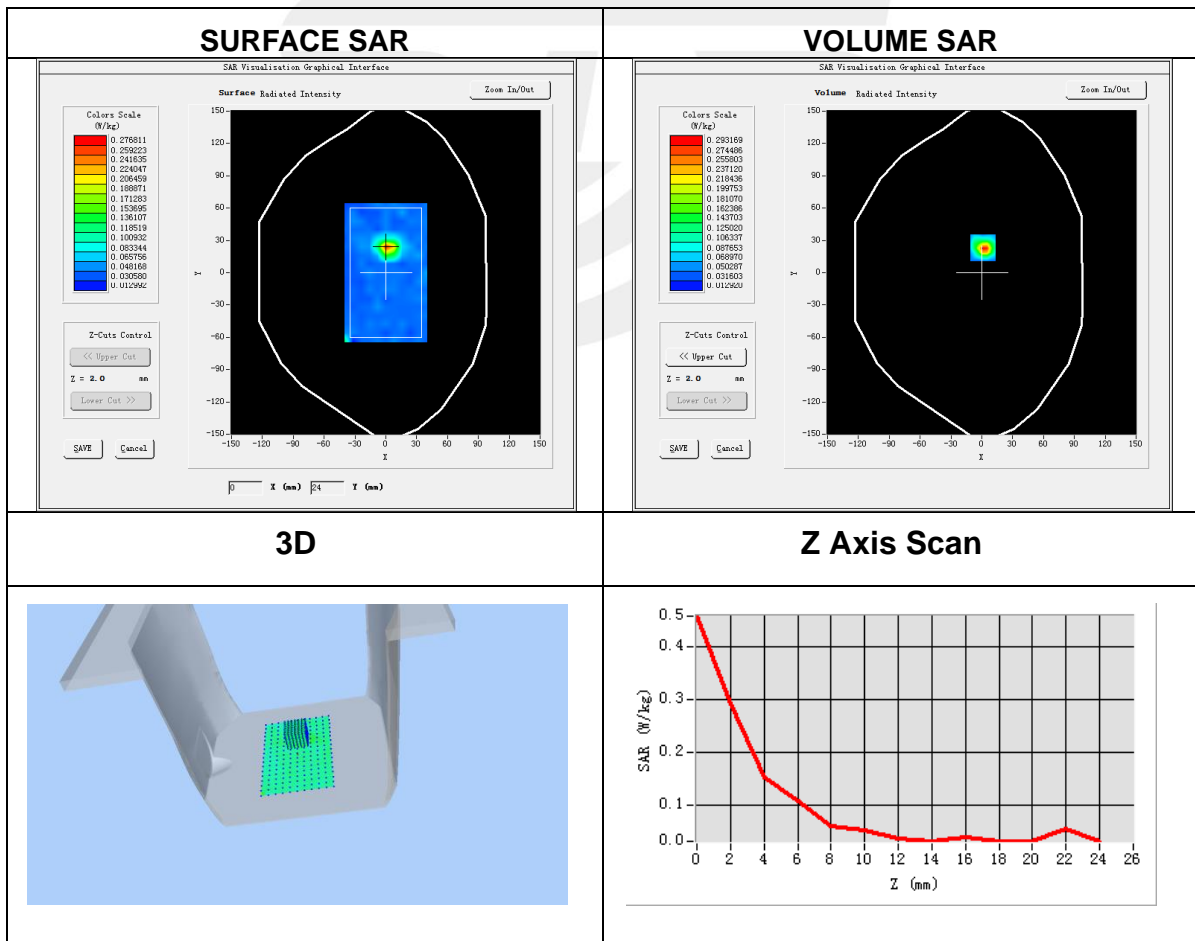



Appendix C. Probe Calibration And Dipole Calibration Report

Refer the appendix Calibration Report.

※※※※END OF THE REPORT※※※※

