

# FCC Part 15B Measurement and Test Report

For

**JACS Solutions LLC**

**8808 Centre Park Drive Suite 305, Columbia, MD 21045, USA**

**FCC ID: 2AGCDM71GY2**

<b>Test Rule(s):</b>	<u>FCC Part 15 Subpart B</u>
<b>Product Description:</b>	<u>MID</u>
<b>Tested Model:</b>	<u>M71GY2</u>
<b>Report No.:</b>	<u>STR16108072I-2</u>
<b>Tested Date:</b>	<u>2016-10-17 to 2016-10-22</u>
<b>Issued Date:</b>	<u>2016-10-22</u>
<b>Tested By:</b>	<u>Iven Guo / Engineer</u> <i>Iven Guo</i>
<b>Reviewed By:</b>	<u>Silin Chen / EMC Manager</u> <i>Silin Chen</i>
<b>Approved &amp; Authorized By:</b>	<u>Jandy So / PSQ Manager</u> <i>Jandy So</i>
<b>Prepared By:</b>	

**Shenzhen SEM.Test Technology Co., Ltd.**  
1/F, Building A, Hongwei Industrial Park, Liuxian 2nd Road,  
Bao'an District, Shenzhen, P.R.C. (518101)  
Tel.: +86-755-33663308 Fax.: +86-755-33663309 Website: www.semtest.com.cn

Note: This test report is limited to the above client company and the product model only. It may not be duplicated without prior permitted by Shenzhen SEM.Test Technology Co., Ltd.

---

**TABLE OF CONTENTS**

<b>1. GENERAL INFORMATION .....</b>	<b>3</b>
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT) .....	3
1.2 TEST STANDARDS .....	4
1.3 TEST METHODOLOGY .....	4
1.4 TEST FACILITY .....	4
1.5 EUT SETUP AND OPERATION MODE .....	5
1.6 MEASUREMENT UNCERTAINTY .....	5
1.7 TEST EQUIPMENT LIST AND DETAILS .....	6
<b>2. SUMMARY OF TEST RESULTS .....</b>	<b>7</b>
<b>3. CONDUCTED EMISSIONS .....</b>	<b>8</b>
3.1 TEST PROCEDURE .....	8
3.2 BASIC TEST SETUP BLOCK DIAGRAM .....	8
3.3 ENVIRONMENTAL CONDITIONS .....	8
3.4 SUMMARY OF TEST RESULTS/PLOTS .....	8
3.5 CONDUCTED EMISSIONS TEST DATA .....	9
<b>4. RADIATED EMISSIONS .....</b>	<b>13</b>
4.1 TEST PROCEDURE .....	13
4.2 TEST RECEIVER SETUP .....	14
4.3 CORRECTED AMPLITUDE & MARGIN CALCULATION .....	14
4.4 ENVIRONMENTAL CONDITIONS .....	14
4.5 SUMMARY OF TEST RESULTS/PLOTS .....	14

## 1. GENERAL INFORMATION

### 1.1 Product Description for Equipment Under Test (EUT)

#### Client Information

Applicant: JACS Solutions LLC  
Address of applicant: 8808 Centre Park Drive Suite 305, Columbia, MD, 21045  
USA

Manufacturer: Xiamen Candour Co., Ltd  
Address of manufacturer: 19F C&D International Building 1669 Huandao East Road,  
Xiamen, Fujian, CN

General Description of EUT	
Product Name:	MID
Trade Name:	/
Model No.:	M71GY2
Adding Model(s):	M71GY2-1, M71GY2-2, M71GP, TG700, TG701, TG702
<i>Note: The test data is gathered from a production sample, provided by the manufacturer. The appearance of others models listed in the report is different from main-test model M71GY2, but the circuit and the electronic construction do not change, declared by the manufacturer.</i>	

Technical Characteristics of EUT	
Rated Voltage:	Battery: DC 3.7V; Adapter: DC 5V/2A charging
Rated Current:	2A
Rated Power:	/
Power Adapter Model:	YN15W-0500200UZ
Lowest Internal Frequency:	24MHz
Highest Internal Frequency:	1.3GHz
Classification of ITE:	Class B

## 1.2 Test Standards

The following report is prepared on behalf of the JACS Solutions LLC in accordance with Part 2, Subpart J, and Part 15, Subparts A and B of the Federal Communication Commissions rules.

The objective is to determine compliance with FCC Part 15, Subpart B, and section 15.205, 15.107, and 15.109 rules.

**Maintenance of compliance** is the responsibility of the manufacturer. Any modification of the product, which result in lowering the emission, should be checked to ensure compliance has been maintained.

## 1.3 Test Methodology

All measurements contained in this report were conducted with ANSI C63.4-2014, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

## 1.4 Test Facility

### **FCC – Registration No.: 934118**

Shenzhen SEM.Test Technology Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files and the Registration is 934118.

### **Industry Canada (IC) Registration No.: 11464A**

The 3m Semi-anechoic chamber of Shenzhen SEM.Test Technology Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 11464A.

### **CNAS Registration No.: L4062**

Shenzhen SEM.Test Technology Co., Ltd. is a testing organization accredited by China National Accreditation Service for Conformity Assessment (CNAS) according to ISO/IEC 17025. The accreditation certificate number is L4062. All measurement facilities used to collect the measurement data are located at 1/F, Building A, Hongwei Industrial Park, Liuxian 2<sup>nd</sup> Road, Bao'an District, Shenzhen, P.R.C (518101).

## 1.5 EUT Setup and Operation Mode

The equipment under test (EUT) was configured to measure its highest possible emission level. The test modes were adapted according to the operation manual for use, more detailed description as follows:

Test Mode List:

Test Mode	Description	Remark
TM1	Charging & Playing	Connected to Adapter, Earphone
TM2	Downloading	Connect to PC

EUT Cable List and Details

Cable Description	Length (M)	Shielded/Unshielded	With Core/Without Core
USB Cable	0.8	Unshielded	Without Ferrite
Earphone Cable	0.8	Unshielded	Without Ferrite
Adapter Cable	1.0	Unshielded	Without Ferrite

Auxiliary Equipment List and Details

Description	Manufacturer	Model	Serial Number
/	/	/	/

Special Cable List and Details

Cable Description	Length (M)	Shielded/Unshielded	With Core/Without Core
Notebook Computer	Lenovo	20007	EB12648265

## 1.6 Measurement Uncertainty

Measurement uncertainty		
Parameter	Conditions	Uncertainty
Conducted Emissions	Conducted	$\pm 2.88\text{dB}$
Transmitter Spurious Emissions	Radiated	$\pm 5.1\text{dB}$

## 1.7 Test Equipment List and Details

No.	Description	Manufacturer	Model	Serial No.	Cal Date	Due Date
SEMT-1072	Spectrum Analyzer	Agilent	E4407B	MY41440400	2016-06-04	2017-06-03
SEMT-1031	Spectrum Analyzer	Rohde & Schwarz	FSP30	836079/035	2016-06-04	2017-06-03
SEMT-1007	EMI Test Receiver	Rohde & Schwarz	ESVB	825471/005	2016-06-04	2017-06-03
SEMT-1008	Amplifier	Agilent	8447F	3113A06717	2016-06-04	2017-06-03
SEMT-1043	Amplifier	C&D	PAP-1G18	2002	2016-06-04	2017-06-03
SEMT-1011	Broadband Antenna	Schwarz beck	VULB9163	9163-333	2016-06-04	2017-06-03
SEMT-1042	Horn Antenna	ETS	3117	00086197	2016-06-04	2017-06-03
SEMT-1121	Horn Antenna	ETS	3116B	00088203	2016-06-04	2017-06-03
SEMT-1069	Loop Antenna	Schwarz beck	FMZB 1516	9773	2016-06-04	2017-06-03
SEMT-1001	EMI Test Receiver	Rohde & Schwarz	ESPI	101611	2016-06-04	2017-06-03
SEMT-1003	L.I.S.N	Schwarz beck	NSLK8126	8126-224	2016-06-04	2017-06-03
SEMT-1002	Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100911	2016-06-04	2017-06-03

---

## 2. SUMMARY OF TEST RESULTS

---

<b>FCC Rules</b>	<b>Description of Test Item</b>	<b>Result</b>
§ 15.107 (a)	Conducted Emissions	Compliant
§ 15.109 (a)	Radiated Emissions	Compliant


N/A: not applicable

### 3. Conducted Emissions

#### 3.1 Test Procedure

Test is conducting under the description of ANSI C63.4-2014, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

#### 3.2 Basic Test Setup Block Diagram

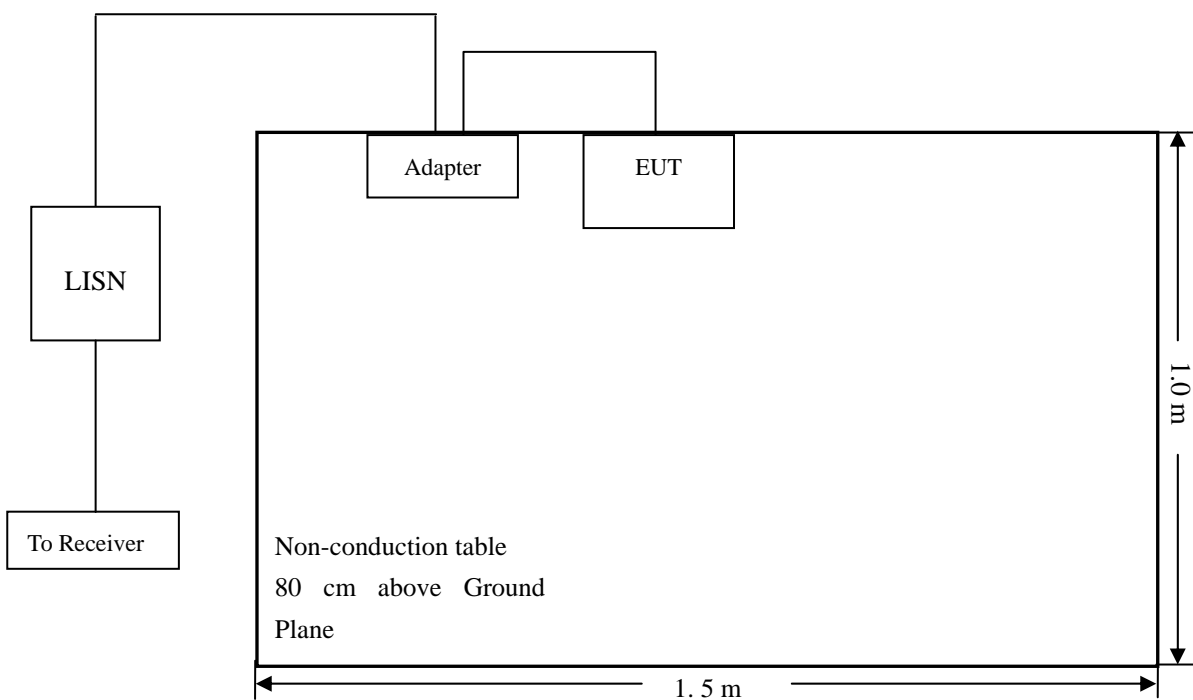

#### 3.3 Environmental Conditions

Temperature:	23 °C
Relative Humidity:	52%
ATM Pressure:	1011 mbar

#### 3.4 Summary of Test Results/Plots

According to the data in section 3.6, the EUT complied with the FCC Part 15.107(a) Conducted margin for a Class B device, with the *worst* margin reading of:

**-9.91 dB at 0.1620 MHz** in the **Neutral, Peak** detector, **TM1** mode, 0.15-30MHz




### 3.5 Conducted Emissions Test Data

#### Plot of Conducted Emissions Test Data


EUT: MID  
 Tested Model: M71GY2  
 Operating Condition: TM1  
 Comment: AC 120V/60Hz; Adapter DC 5V

Test Specification: Neutral

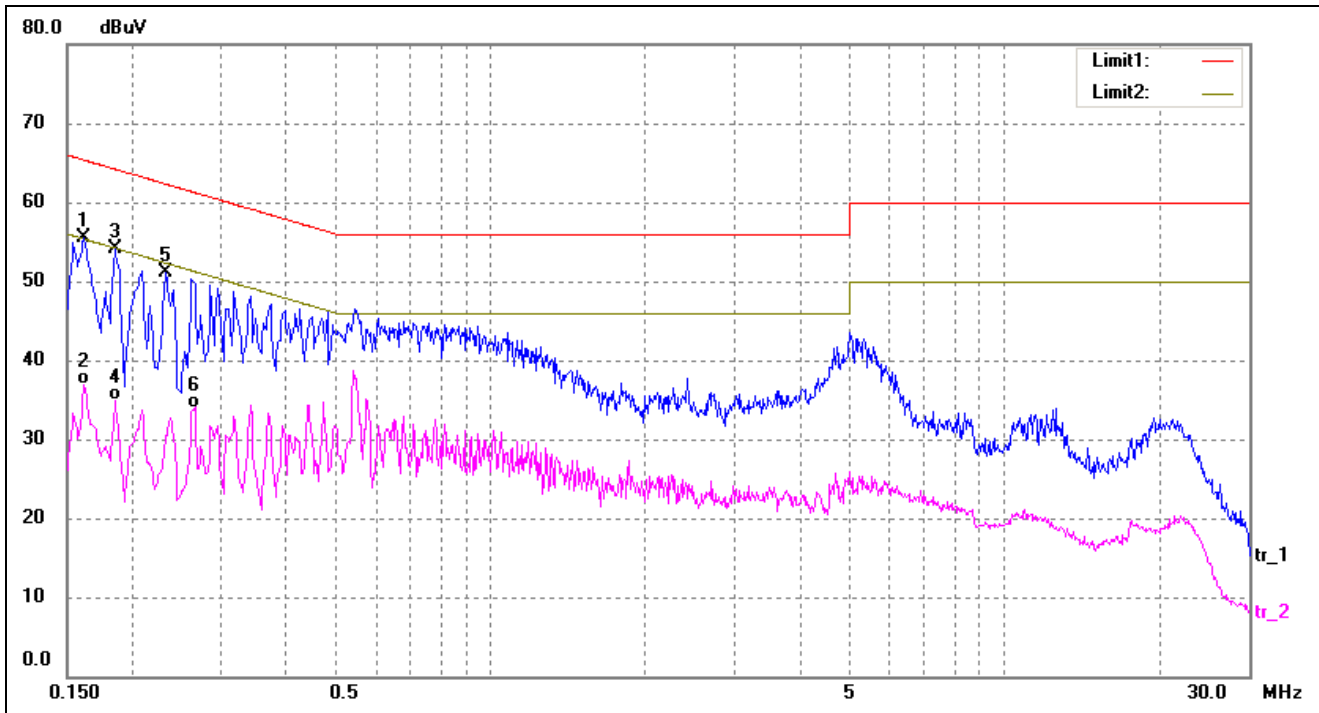

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1*	0.1620	45.61	9.84	55.45	65.36	-9.91	QP
2	0.1620	27.10	9.84	36.94	55.36	-18.42	AVG
3	0.1860	44.25	9.81	54.06	64.21	-10.15	QP
4	0.1860	25.11	9.81	34.92	54.21	-19.29	AVG
5	0.2340	41.38	9.80	51.18	62.31	-11.13	QP
6	0.2660	24.20	9.80	34.00	51.24	-17.24	AVG

Test Specification: Line

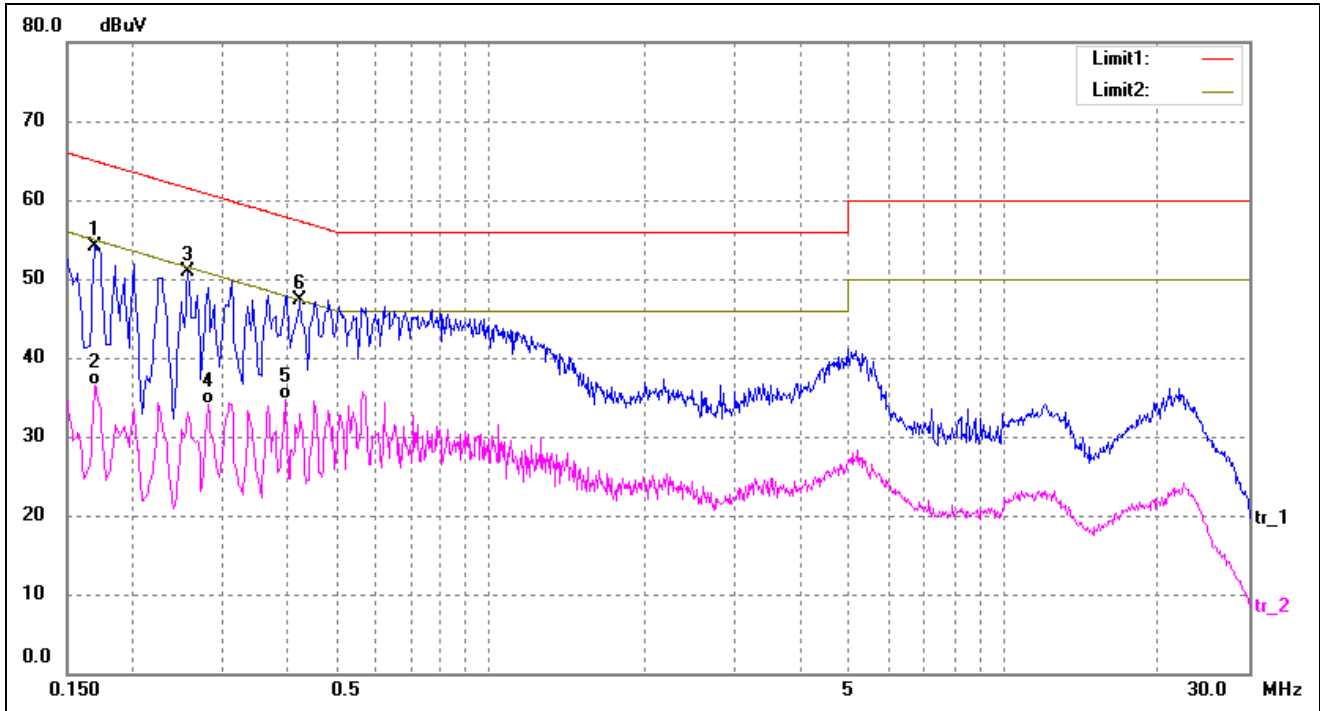


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1700	44.26	9.83	54.09	64.96	-10.87	QP
2	0.1700	26.64	9.83	36.47	54.96	-18.49	AVG
3	0.2580	41.09	9.80	50.89	61.50	-10.61	QP
4	0.2820	24.29	9.80	34.09	50.76	-16.67	AVG
5	0.3980	24.85	9.80	34.65	47.90	-13.25	AVG
6*	0.4260	37.47	9.80	47.27	57.33	-10.06	QP

**Plot of Conducted Emissions Test Data**


EUT: *MID*  
 Tested Model: *M71GY2*  
 Operating Condition: *TM2*  
 Comment: *AC 120V/60Hz; Adapter DC 5V*

Test Specification: *Neutral*

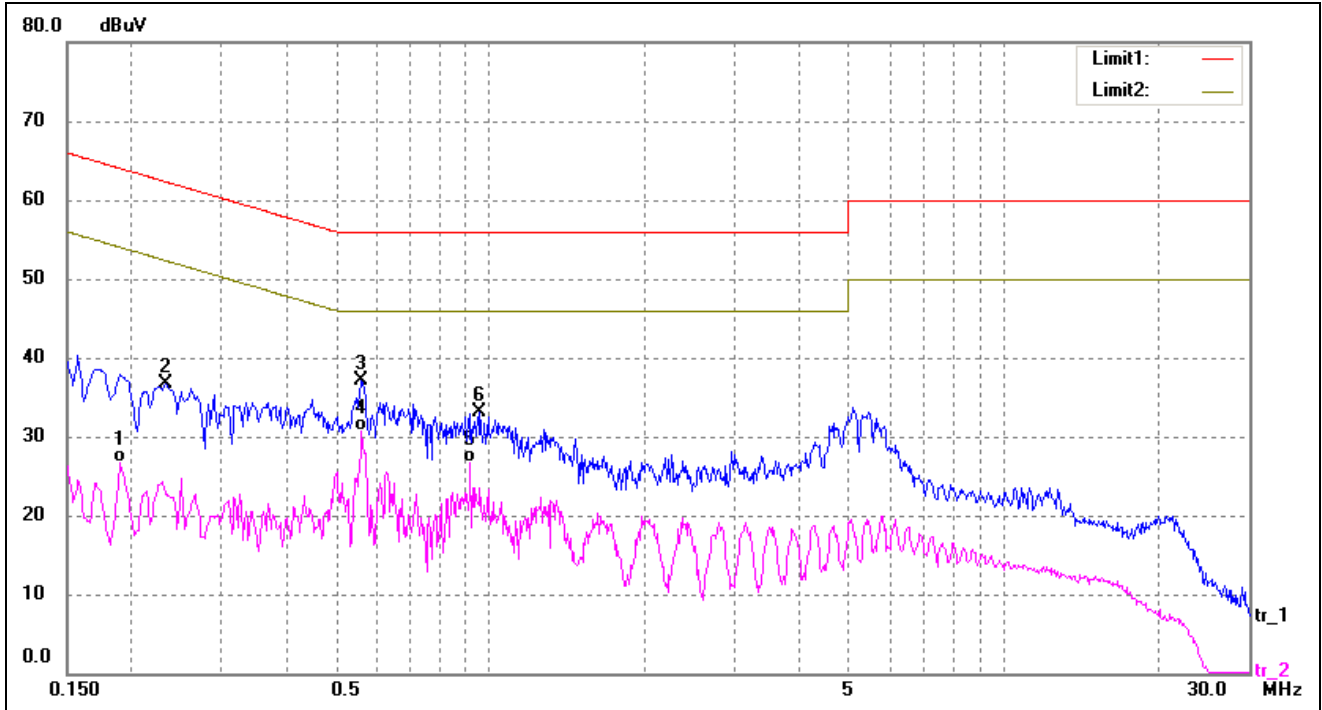

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1900	26.65	0.00	26.65	54.04	-27.39	AVG
2	0.2340	36.65	0.00	36.65	62.31	-25.66	QP
3	0.5620	37.13	0.00	37.13	56.00	-18.87	QP
4*	0.5620	30.66	0.00	30.66	46.00	-15.34	AVG
5	0.9140	26.72	0.00	26.72	46.00	-19.28	AVG
6	0.9580	33.14	0.00	33.14	56.00	-22.86	QP

Test Specification: Line

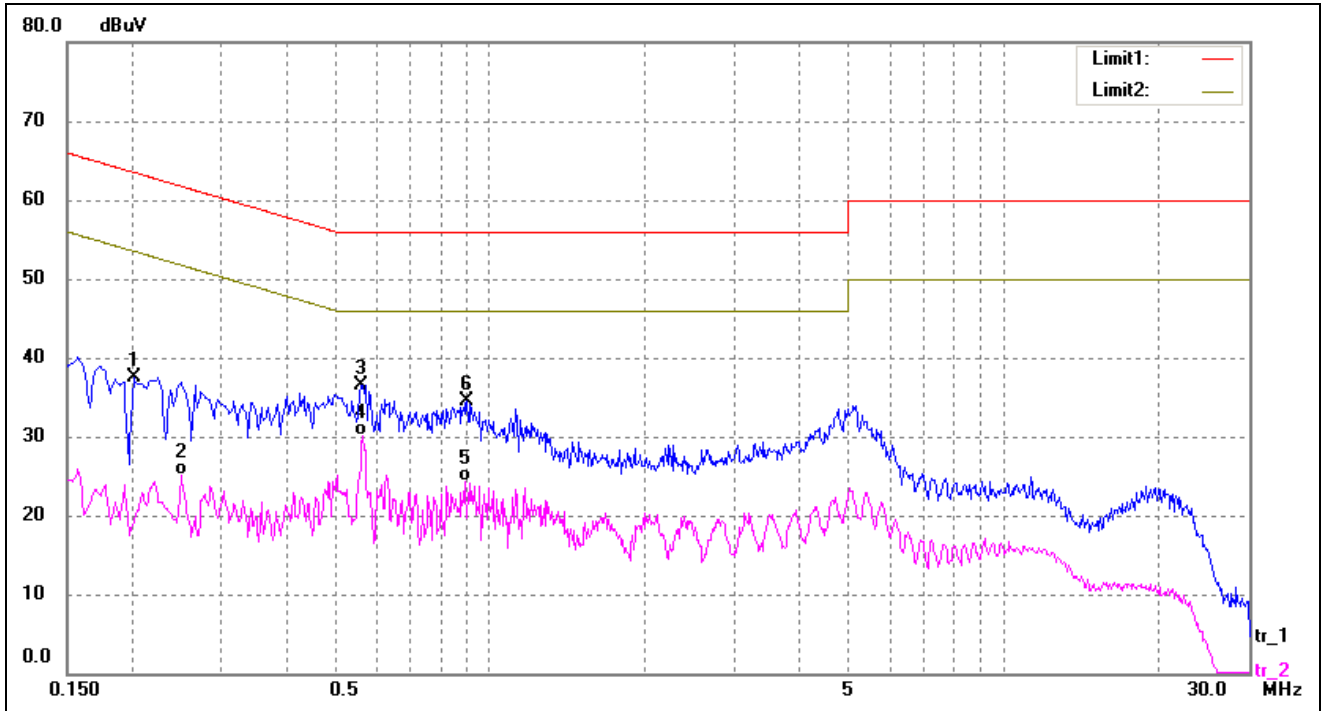

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.2020	37.59	0.00	37.59	63.53	-25.94	QP
2	0.2500	25.11	0.00	25.11	51.76	-26.65	AVG
3	0.5620	36.58	0.00	36.58	56.00	-19.42	QP
4*	0.5660	30.12	0.00	30.12	46.00	-15.88	AVG
5	0.8940	24.26	0.00	24.26	46.00	-21.74	AVG
6	0.9020	34.46	0.00	34.46	56.00	-21.54	QP


## 4. Radiated Emissions

### 4.1 Test Procedure

The setup of EUT is according with per ANSI C63.4-2014 measurement procedure. The specification used was with the FCC Part 15.109 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

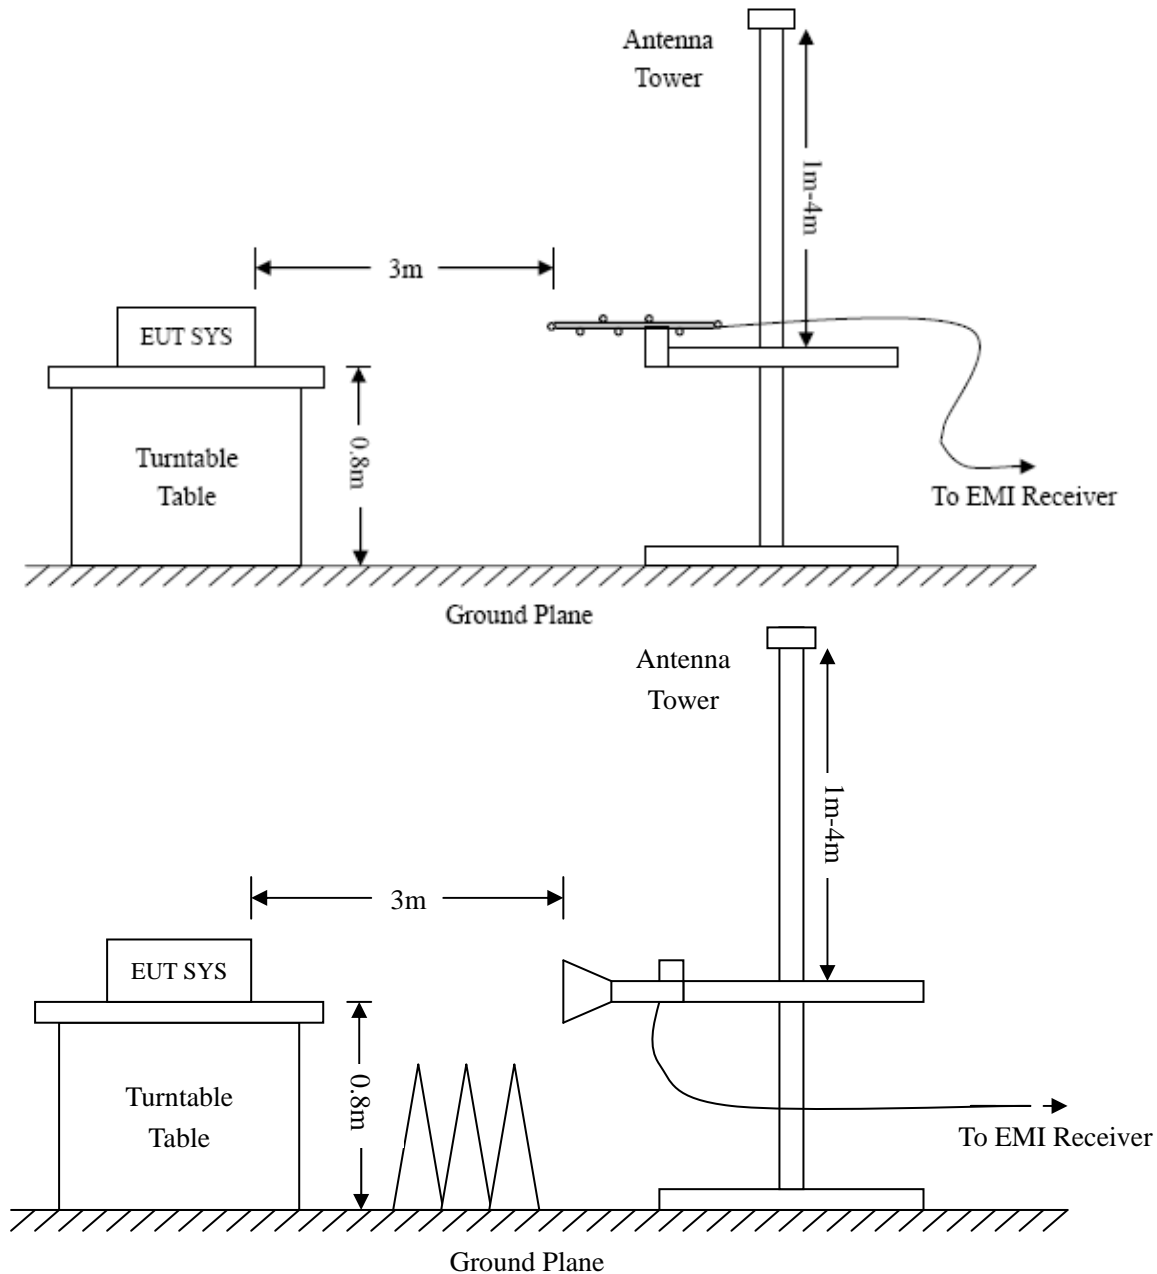

### 4.2 Test Receiver Setup

Frequency :9kHz-30MHz  
 RBW=10KHz,  
 VBW =30KHz  
 Sweep time= Auto  
 Trace = max hold  
 Detector function = peak

Frequency :30MHz-1GHz  
 RBW=120KHz,  
 VBW=300KHz  
 Sweep time= Auto  
 Trace = max hold  
 Detector function = peak, QP

Frequency :Above 1GHz  
 RBW=1MHz,  
 VBW=3MHz(Peak), 10Hz(AV)  
 Sweep time= Auto  
 Trace = max hold  
 Detector function = peak, AV

### 4.3 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and the Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} - \text{Corr. Factor}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -6dB $\mu$ V means the emission is 6dB $\mu$ V below the maximum limit for a Class B device. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{FCC Part 15.109(a) Limit}$$

### 4.4 Environmental Conditions

Temperature:	23 °C
Relative Humidity:	55 %
ATM Pressure:	1011 mbar

### 4.5 Summary of Test Results/Plots


According to the data, the EUT complied with the FCC Part 15.109(a) rule, and had the worst margin of:

**-0.47 dB at 744.8660 MHz in the Horizontal polarization, TM1 mode, 30MHz to 1 GHz, 3Meters**

**Plot of Radiated Emissions Test Data**


EUT: *MID*  
 Tested Model: *M71GY2*  
 Operating Condition: *TM1*  
 Comment: *AC 120V/60Hz; Adapter DC 5V*

Test Specification: *Horizontal*

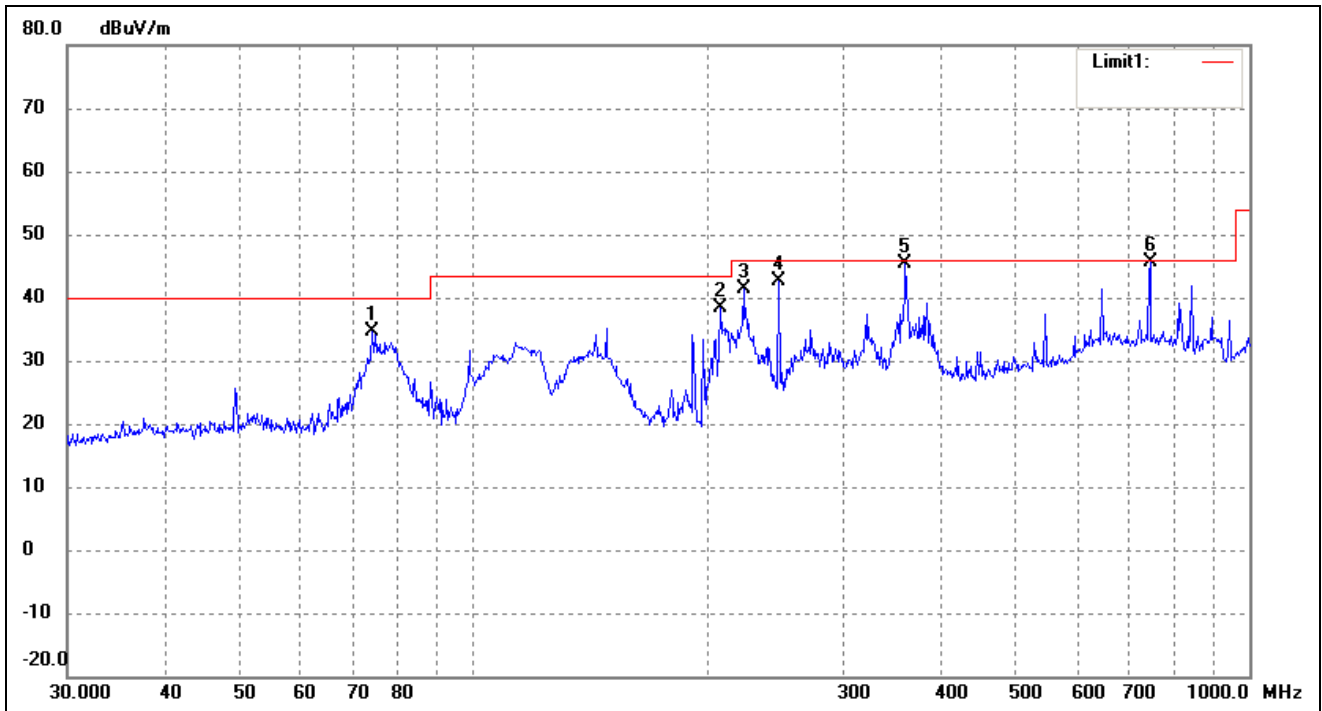

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	74.1350	32.14	2.39	34.53	40.00	-5.47	0	100	QP
2	208.5802	33.16	5.22	38.38	43.50	-5.12	0	100	QP
3	222.9501	33.63	7.85	41.48	46.00	-4.52	0	100	QP
4	247.6819	33.49	9.22	42.71	46.00	-3.29	0	100	QP
5	360.4476	33.54	11.90	45.44	46.00	-0.56	0	100	QP
6	744.8660	26.72	18.81	45.53	46.00	-0.47	0	100	QP

Test Specification: Vertical

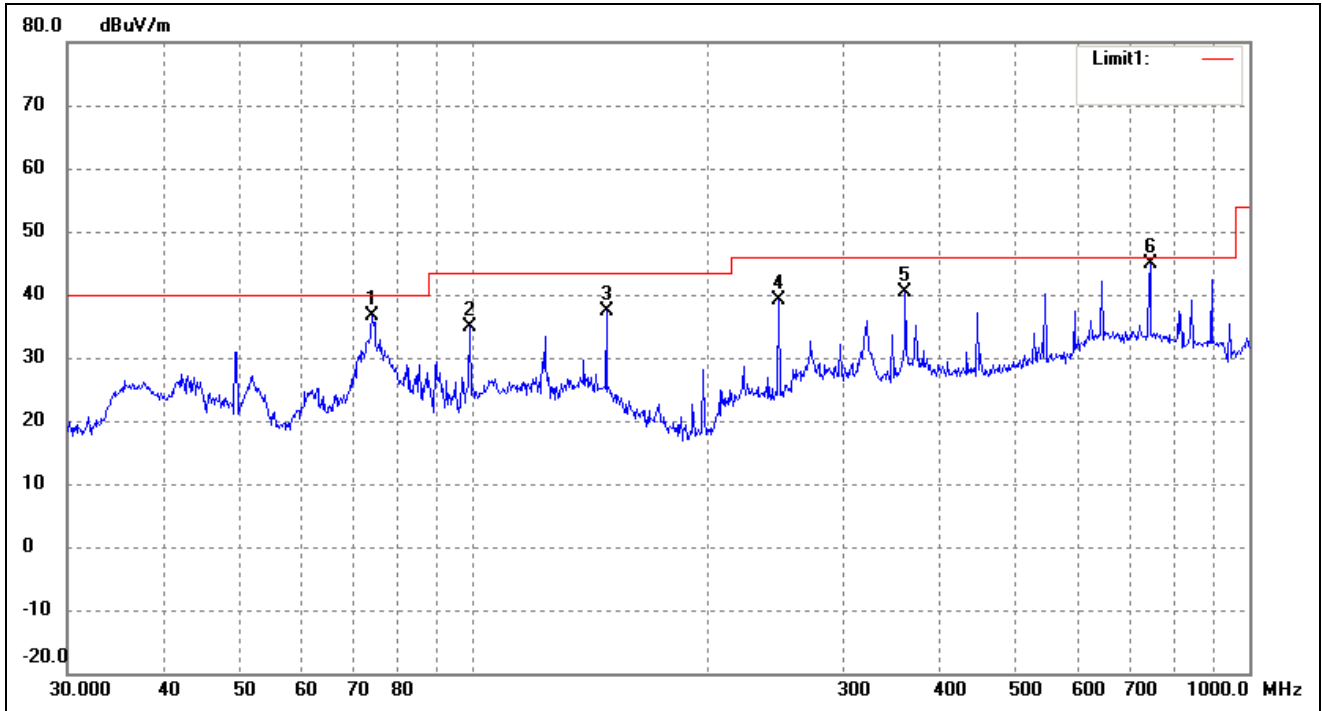


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	74.1350	34.20	2.39	36.59	40.00	-3.41	0	100	QP
2	98.8325	30.04	4.76	34.80	43.50	-8.70	0	100	QP
3	148.4410	34.53	2.82	37.35	43.50	-6.15	0	100	QP
4	247.6819	30.01	9.22	39.23	46.00	-6.77	0	100	QP
5	360.4476	28.44	11.90	40.34	46.00	-5.66	0	100	QP
6	744.8660	26.03	18.81	44.84	46.00	-1.16	0	100	QP



**Plot of Radiated Emissions Test Data**


EUT: *MID*  
 Tested Model: *M71GY2*  
 Operating Condition: *TM2*  
 Comment: *AC 120V/60Hz; Adapter DC 5V*

Test Specification: *Horizontal*

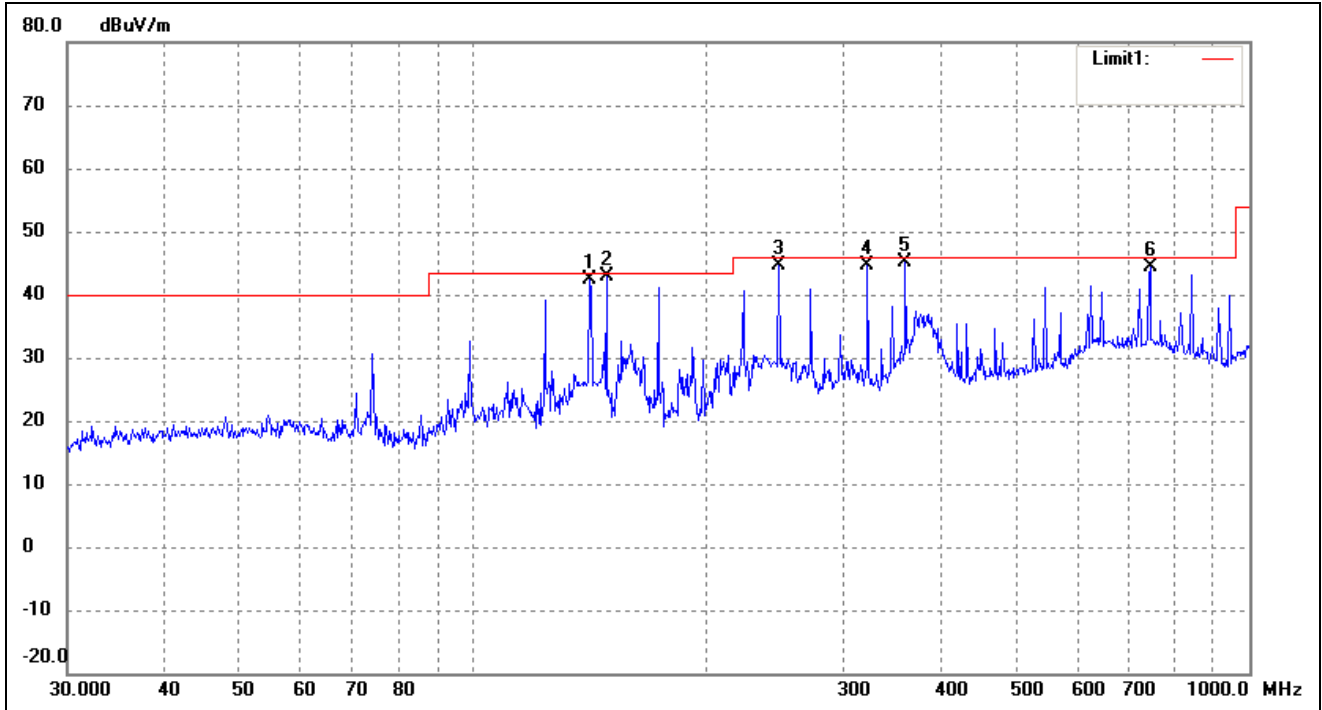

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	141.3298	39.34	3.10	42.44	43.50	-1.06	0	100	QP
2	148.4410	40.10	2.82	42.92	43.50	-0.58	0	100	QP
3	247.6819	35.30	9.22	44.52	46.00	-1.48	0	100	QP
4	322.1886	32.70	11.88	44.58	46.00	-1.42	0	100	QP
5	360.4477	33.28	11.90	45.18	46.00	-0.82	0	100	QP
6	744.8661	25.48	18.81	44.29	46.00	-1.71	0	100	QP

Test Specification: Vertical

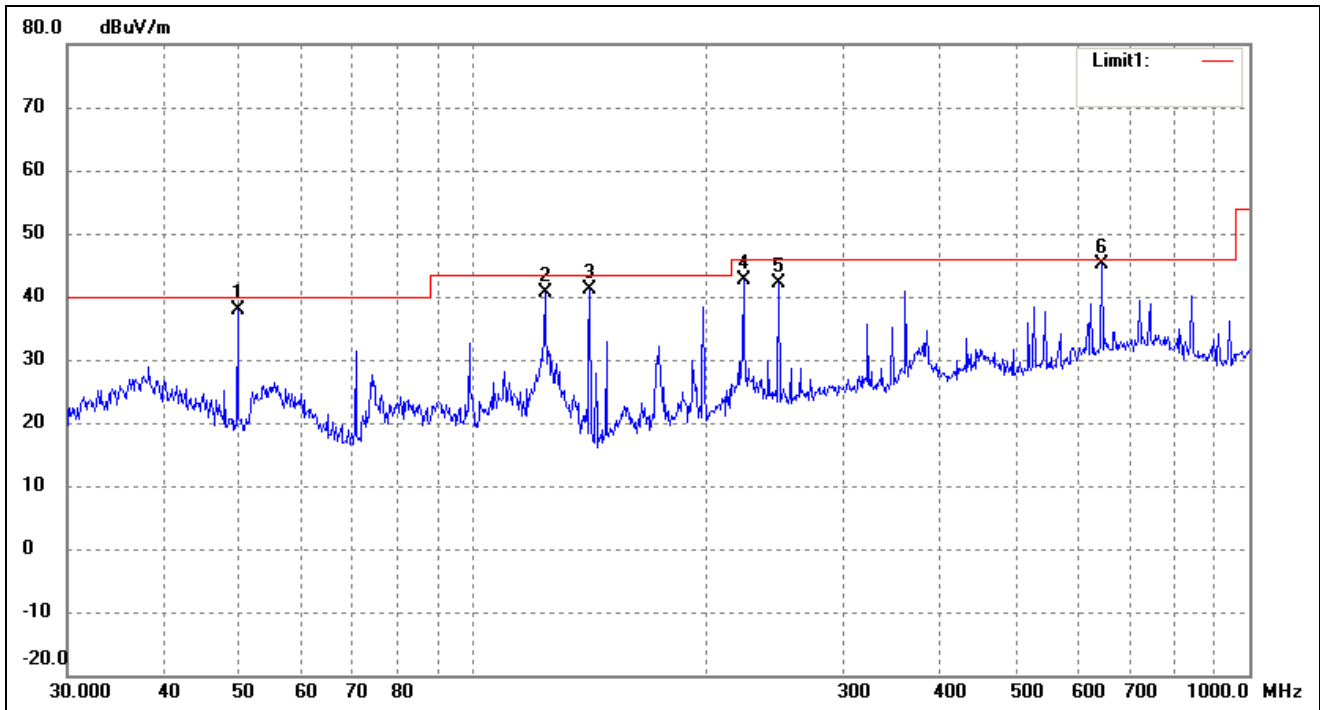

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	49.7068	32.91	4.98	37.89	40.00	-2.11	0	100	QP
2	123.6985	36.06	4.52	40.58	43.50	-2.92	0	100	QP
3	141.3298	37.99	3.10	41.09	43.50	-2.41	0	100	QP
4	222.9502	34.70	7.85	42.55	46.00	-3.45	0	100	QP
5	247.6819	32.79	9.22	42.01	46.00	-3.99	0	100	QP
6	645.1195	27.08	17.94	45.02	46.00	-0.98	0	100	QP

Note: Testing is carried out with frequency rang 30MHz to the 1GHz, which above 1GHz are attenuated more than 20 dB below the permissible value and are not showed in the test report.

\*\*\*\*\* END OF REPORT \*\*\*\*\*