

# TEST REPORT

**Reference No.**..... : WTS16S0653235E  
**FCC ID**..... : 2AGE6-INXNI01  
**Applicant**..... : Shenzhen Silver Star Intelligent Technology Co., Ltd.  
**Address**..... : Dafu Industrial Areas, Guanguang Road, Bao'an District, Shenzhen, China.  
**Manufacturer** ..... : Shenzhen Silver Star Intelligent Technology Co., Ltd.  
**Address**..... : Dafu Industrial Areas, Guanguang Road, Bao'an District, Shenzhen, China.  
**Product Name**..... : Controller ( Robot Vacuum Cleaner )  
**Model No**..... : inxni-01  
**Standards** ..... : FCC CFR47 Part 15 Section 15.249: 2015  
**Date of Receipt sample** .... : Jun. 15, 2016  
**Date of Test** ..... : Jun. 16 – Aug. 22, 2016  
**Date of Issue**..... : Aug. 22, 2016  
**Test Result**..... : Pass

Remarks:

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

**Prepared By:**

**Waltek Services (Shenzhen) Co., Ltd.**

Address: 1/F., Fukangtai Building, West Baima Road, Songgang Street, Baoan District, Shenzhen, Guangdong, China

Tel :+86-755-83551033

Fax:+86-755-83552400

Compiled by:

*Lake Xie*

Lake Xie / Test Engineer

Approved by:

*Philo Zhong*  


Philo Zhong / Manager

## 2 Test Summary

Test Items	Test Requirement	Result
Conducted Emissions	15.207	PASS
Radiated Emission	15.249(a) 15.209 15.205(a)	PASS
Periodic Operation	15.35(c)	PASS
Outside Restricted band	15.249 15.205 15.209	PASS
20dB Bandwidth	15:215(c)	PASS
Antenna Requirement	15.203	PASS

### 3 Contents

	Page
<b>1 COVER PAGE.....</b>	<b>1</b>
<b>2 TEST SUMMARY .....</b>	<b>2</b>
<b>3 CONTENTS .....</b>	<b>3</b>
<b>4 GENERAL INFORMATION.....</b>	<b>4</b>
4.1 GENERAL DESCRIPTION OF E.U.T.....	4
4.2 DETAILS OF E.U.T.....	4
4.3 CHANNEL LIST .....	4
4.4 TEST FACILITY .....	4
<b>5 EQUIPMENT USED DURING TEST .....</b>	<b>5</b>
5.1 EQUIPMENTS LIST .....	5
5.2 MEASUREMENT UNCERTAINTY.....	6
5.3 TEST EQUIPMENT CALIBRATION.....	6
<b>6 RADIATION EMISSION TEST .....</b>	<b>7</b>
6.1 EUT OPERATION.....	7
6.2 TEST SETUP .....	8
2.1 SPECTRUM ANALYZER SETUP .....	9
6.3 TEST PROCEDURE.....	10
6.4 TEST RESULT .....	11
<b>7 PERIODIC OPERATION .....</b>	<b>13</b>
<b>8 OUTSIDE OF BAND EMISSION.....</b>	<b>14</b>
8.1 TEST PROCEDURE.....	14
8.2 TEST RESULT .....	14
<b>9 20 DB BANDWIDTH MEASUREMENT .....</b>	<b>15</b>
9.1 TEST PROCEDURE.....	15
9.2 TEST RESULT .....	15
<b>10 ANTENNA REQUIREMENT .....</b>	<b>16</b>
<b>11 PHOTOGRAPHS- MODEL INXNI-01 TEST SETUP .....</b>	<b>17</b>
11.1 PHOTOGRAPH – RADIATION EMISSION .....	17
<b>12 PHOTOGRAPHS - CONSTRUCTIONAL DETAILS.....</b>	<b>19</b>
12.1 MODEL INXNI-01- EXTERNAL PHOTOS.....	19
12.2 MODEL INXNI-01- INTERNAL PHOTOS.....	22

## 4 General Information

### 4.1 General Description of E.U.T.

Product Name:	Controller (Robot Vacuum Cleaner)
Model No.:	inxni-01
Model Differences:	N/A
Type of Modulation:	FSK
Frequency Range:	2430MHz
The Lowest Oscillator:	16MHz
Antenna installation:	PCB Printed Antenna

### 4.2 Details of E.U.T.

Technical Data:	DC 3.0V by battery
-----------------	--------------------

### 4.3 Channel List

Channel No.	Frequency (MHz)
1	2430

### 4.4 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **IC – Registration No.:7760A-1**

Waltek Services(Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the Industry Canada. The acceptance letter from the Industry Canada is maintained in our files. Registration number 7760A-1, Oct 15, 2015.

- **FCC Test Site 1#– Registration No.: 880581**

Waltek Services(Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 880581, April 29, 2014.

- **FCC Test Site 2#– Registration No.: 328995**

Waltek Services(Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 328995, December 3, 2014.

#### 4.4.1 Test Mode

All test mode(s) and condition(s) mentioned were considered and evaluated respectively by performing full tests, the worst data were recorded and reported.

Test mode	Lower channel	Middle channel	Upper channel
Transmitting	N/A	2430MHz	N/A

## 5 Equipment Used during Test

### 5.1 Equipments List

<b>3m Semi-anechoic Chamber for Radiation Emissions Test site 1#</b>						
<b>Item</b>	<b>Equipment</b>	<b>Manufacturer</b>	<b>Model No.</b>	<b>Serial No.</b>	<b>Last Calibration Date</b>	<b>Calibration Due Date</b>
1	EMC Analyzer	Agilent	E7405A	MY45114943	Sep.14,2015	Sep.13,2016
2	Active Loop Antenna	Beijing Dazhi	ZN30900A	-	Sep.14,2015	Sep.13,2016
3	Trilog Broadband Antenna	SCHWARZBECK	VULB9163	336	Apr.18,2016	Apr.17,2017
4	Coaxial Cable (below 1GHz)	Top	TYPE16(13M)	-	Sep.14,2015	Sep.13,2016
5	Broad-band Horn Antenna	SCHWARZBECK	BBHA 9120 D	667	Apr.18,2016	Apr.17,2017
6	Broad-band Horn Antenna	SCHWARZBECK	BBHA 9170	335	Apr.18,2016	Apr.17,2017
7	Broadband Preamplifier	COMPLIANCE DIRECTION	PAP-1G18	2004	Mar.16,2016	Mar.15,2017
8	Coaxial Cable (above 1GHz)	Top	1GHz-25GHz	EW02014-7	Apr.09,2016	Apr.08,2017
<b>3m Semi-anechoic Chamber for Radiation Emissions Test site 2#</b>						
<b>Item</b>	<b>Equipment</b>	<b>Manufacturer</b>	<b>Model No.</b>	<b>Serial No</b>	<b>Last Calibration Date</b>	<b>Calibration Due Date</b>
1	Test Receiver	R&S	ESCI	101296	Sep.14,2015	Sep.13,2016
2	Trilog Broadband Antenna	SCHWARZBECK	VULB9160	9160-3325	Sep.14,2015	Sep.13,2016
3	Amplifier	Compliance pirection systems inc	PAP-0203	22024	Sep.14,2015	Sep.13,2016
4	Cable	HUBER+SUHNER	CBL2	525178	Sep.14,2015	Sep.13,2016
<b>RF Conducted Testing</b>						
<b>Item</b>	<b>Equipment</b>	<b>Manufacturer</b>	<b>Model No.</b>	<b>Serial No.</b>	<b>Last Calibration Date</b>	<b>Calibration Due Date</b>
1.	EMC Analyzer (9k~26.5GHz)	Agilent	E7405A	MY45114943	Sep.14,2015	Sep.13,2016
2.	Spectrum Analyzer (9k-6GHz)	R&S	FSL6	100959	Sep.14,2015	Sep.13,2016
3.	Signal Analyzer (9k~26.5GHz)	Agilent	N9010A	MY50520207	Sep.14,2015	Sep.13,2016
4.	Humidity Chamber	GF	GTH-225-40-1P	IAA061213	Sep.14,2015	Sep.13,2016

## 5.2 Measurement Uncertainty

Parameter	Uncertainty
Radio Frequency	$\pm 1 \times 10^{-6}$
RF Power	$\pm 1.0$ dB
RF Power Density	$\pm 2.2$ dB
Radiated Spurious Emissions test	$\pm 5.03$ dB (Bilog antenna 30M~1000MHz)
	$\pm 5.47$ dB (Horn antenna 1000M~25000MHz)

## 5.3 Test Equipment Calibration

All the test equipments used are valid and calibrated by CEPREI Certification Body that address is No.110 Dongguan Zhuang RD. Guangzhou, P.R.China.

## 6 Radiation Emission Test

Test Requirement: FCC Part15 Paragraph 15.249&15.209&15.205

Test Method: ANSI 63.10: 2013

Measurement Distance: 3m

Test Result: PASS

15.249(a)Limit:

Fundamental frequency	Field strength of fundamental		Field strength of harmonics	
	mV/m	dBuV/m	uV/m	dBuV/m
902-928 MHz	50	94	500	54
2400-2483.5 MHz	50	94	500	54
5725-5875 MHz	50	94	500	54
24.0-24.25 GHz	250	108	2500	68

15.209 Limit:

Frequency (MHz)	Field Strength		Field Strength Limit at 3m Measurement Dist	
	uV/m	Distance (m)	uV/m	dBuV/m
0.009 ~ 0.490	2400/F(kHz)	300	10000 * 2400/F(kHz)	$20\log^{(2400/F(kHz))} + 80$
0.490 ~ 1.705	24000/F(kHz)	30	100 * 24000/F(kHz)	$20\log^{(24000/F(kHz))} + 40$
1.705 ~ 30	30	30	100 * 30	$20\log^{(30)} + 40$
30 ~ 88	100	3	100	$20\log^{(100)}$
88 ~ 216	150	3	150	$20\log^{(150)}$
216 ~ 960	200	3	200	$20\log^{(200)}$
Above 960	500	3	500	$20\log^{(500)}$

**Note:** RF Voltage(dBuV)=20 log<sub>10</sub> RF Voltage(uV)

### 6.1 EUT Operation

Operating Environment :

Temperature: 23.5 °C

Humidity: 51.1 % RH

Atmospheric Pressure: 101.2kPa


EUT Operation :

The test was performed in transmitting mode, the test data were shown in the report.


## 6.2 Test Setup

The radiated emission tests were performed in the 3m Semi- Anechoic Chamber test site, using the setup accordance with the ANSI C63.10.

The test setup for emission measurement below 30MHz.

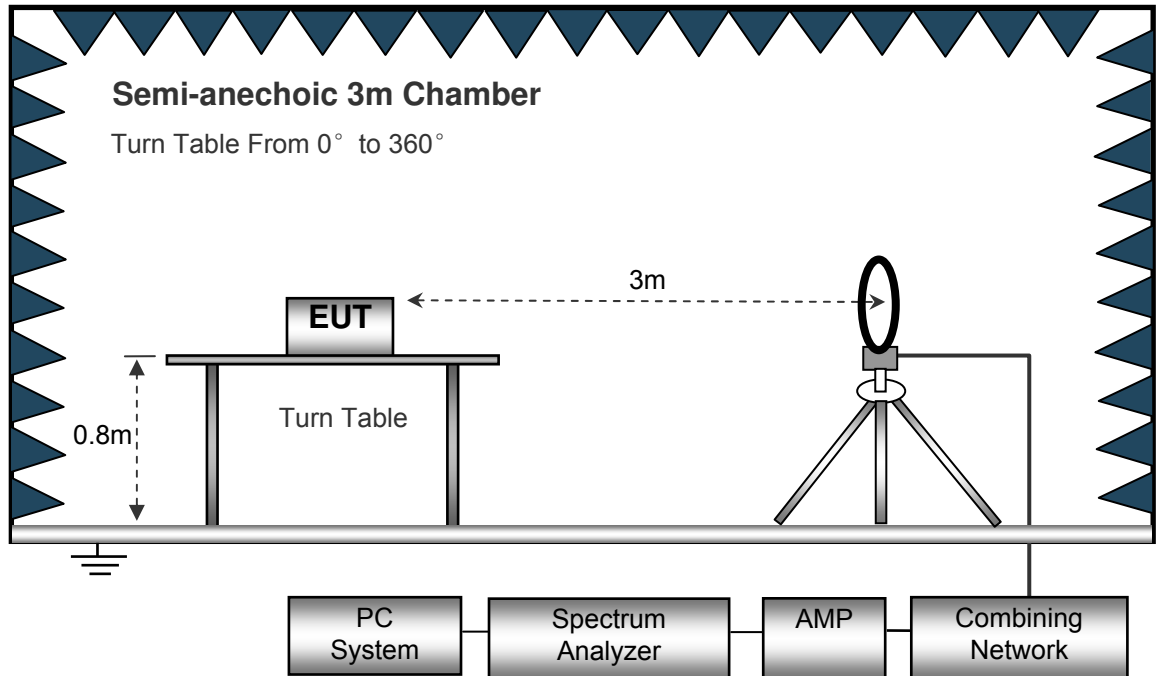


The test setup for emission measurement from 30MHz to 1GHz.

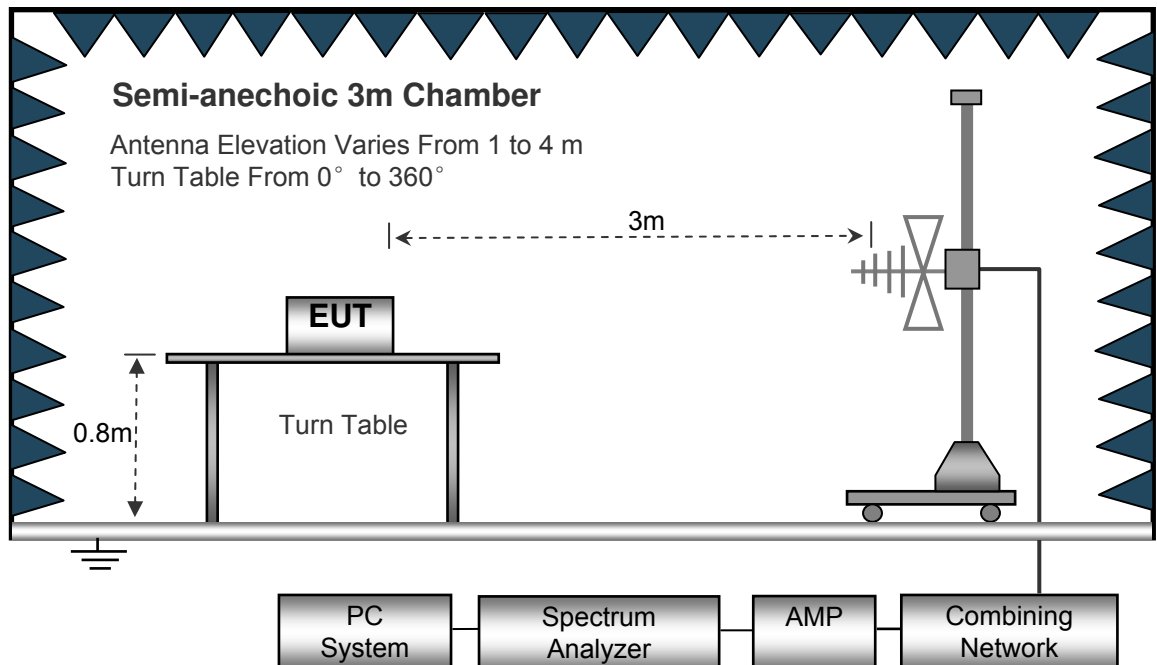



The test setup for emission measurement above 1 GHz.

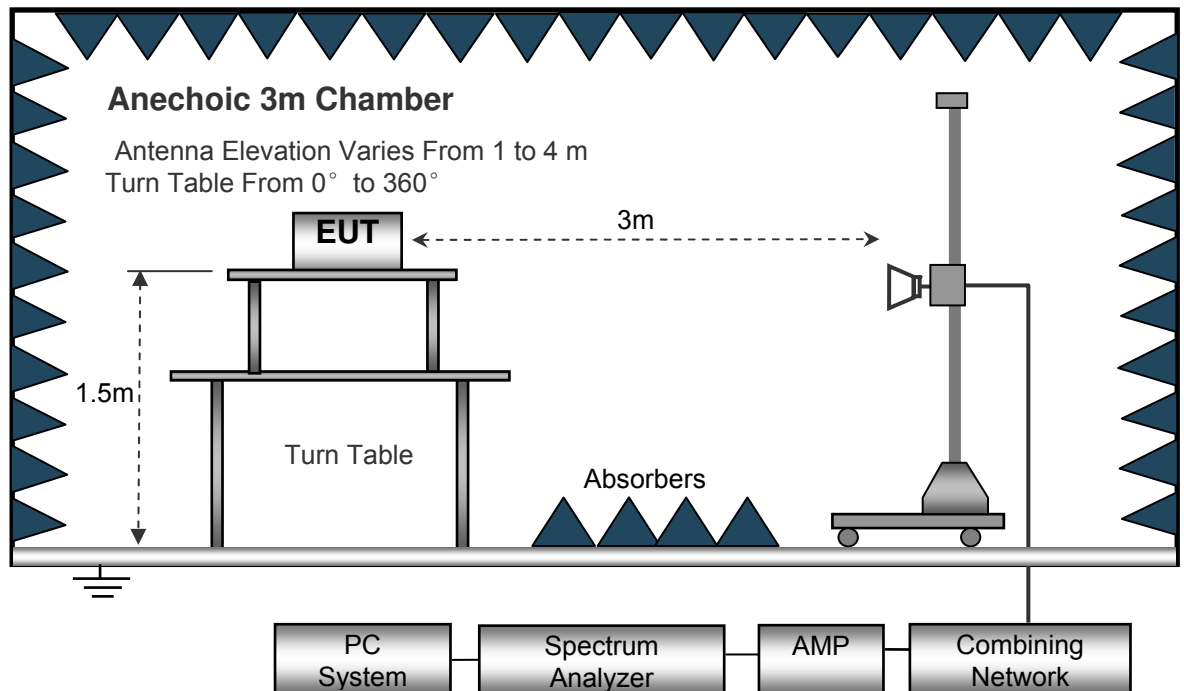

## 2.1 Spectrum Analyzer Setup

Below 30MHz

Sweep Speed ..... Auto  
 IF Bandwidth..... 10kHz  
 Video Bandwidth ..... 10kHz  
 Resolution Bandwidth..... 10kHz

30MHz ~ 1GHz

Sweep Speed ..... Auto  
 Detector PK  
 Resolution Bandwidth..... 100kHz  
 Video Bandwidth ..... 300kHz

Above 1GHz

Sweep Speed ..... Auto  
 Detector PK  
 Resolution Bandwidth..... 1MHz  
 Video Bandwidth ..... 3MHz  
 Detector Ave.  
 Resolution Bandwidth..... 1MHz  
 Video Bandwidth ..... 10Hz

### 6.3 Test Procedure

1. The EUT is placed on a turntable, which is 0.8m above ground plane for below 1GHz and 1.5m above 1GHz.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is moved from 1m to 4m to find out the maximum emissions. The spectrum was investigated from the lowest radio frequency signal generated in the device, without going below 9 kHz, up to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.
7. The radiation measurements are tested under 3-axes(X,Y,Z) position(X denotes lying on the table, Y denotes side stand and Z denotes vertical stand), After pre-test, It was found that the worse radiation emission was get at the X position. So the data shown was the X position only.

## 6.4 Test Result

Test Frequency : 16MHz~30MHz

The measurements were more than 20 dB below the limit and not reported.

Test Frequency: 30MHz ~ 18GHz

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.249, 15.205, 15.209	
				Height	Polar			Limit	Margin
(MHz)	(dB $\mu$ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB/m)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)
2430.00	59.34	PK	313	1.5	H	-13.08	46.26	114.00	-67.74
2430.00	55.31	PK	243	1.7	V	-13.08	42.23	114.00	-71.77
4900.00	57.45	PK	193	1.6	H	0.09	57.54	74.00	-16.46
4900.00	50.32	PK	224	1.4	V	0.09	50.41	74.00	-23.59
7350.00	53.52	PK	138	1.0	H	3.01	56.53	74.00	-17.47
7350.00	53.69	PK	16	1.8	V	3.01	56.70	74.00	-17.30
9800.00	51.02	PK	11	1.5	H	5.39	56.41	74.00	-17.59
9800.00	50.74	PK	360	1.7	V	5.39	56.13	74.00	-17.87

AV = Peak +20Log10(duty cycle) =PK+(-0.72) [refer to section 8 for more detail]

Frequency	PK	Turn table Angle	RX Antenna		Duty cycle Factor	AV	FCC Part 15.249, 15.205, 15.209	
			Height	Polar			Limit	Margin
(MHz)	(dB $\mu$ V/m)	Degree	(m)	(H/V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)
2430.00	46.26	313	1.5	H	-9.27	36.99	94.00	-57.01
2430.00	42.23	243	1.7	V	-9.27	32.96	94.00	-61.04
4900.00	57.54	193	1.6	H	-9.27	48.27	54.00	-5.73
4900.00	50.41	224	1.4	V	-9.27	41.14	54.00	-12.86
7350.00	56.53	138	1.0	H	-9.27	47.26	54.00	-6.74
7350.00	56.70	16	1.8	V	-9.27	47.43	54.00	-6.57
9800.00	56.41	11	1.5	H	-9.27	47.14	54.00	-6.86
9800.00	56.13	360	1.7	V	-9.27	46.86	54.00	-7.14

## 7 Periodic Operation

The duty cycle was determined by the following equation:


To calculate the actual field intensity, the duty cycle correction factor in decibel is needed for later use and can be obtained from following conversion

Duty Cycle(%)=Total On interval in a complete pulse train/ Length of a complete pulse train \* %

Duty Cycle Correction Factor(dB)=20 \* Log<sub>10</sub>(Duty Cycle)

Total transmission time(ms)	61.60
Length of a complete transmission period(ms)	61.60
Duty Cycle(%)	100
Duty Cycle Correction Factor(dB)	0

Refer to the duty cycle plot (as below)

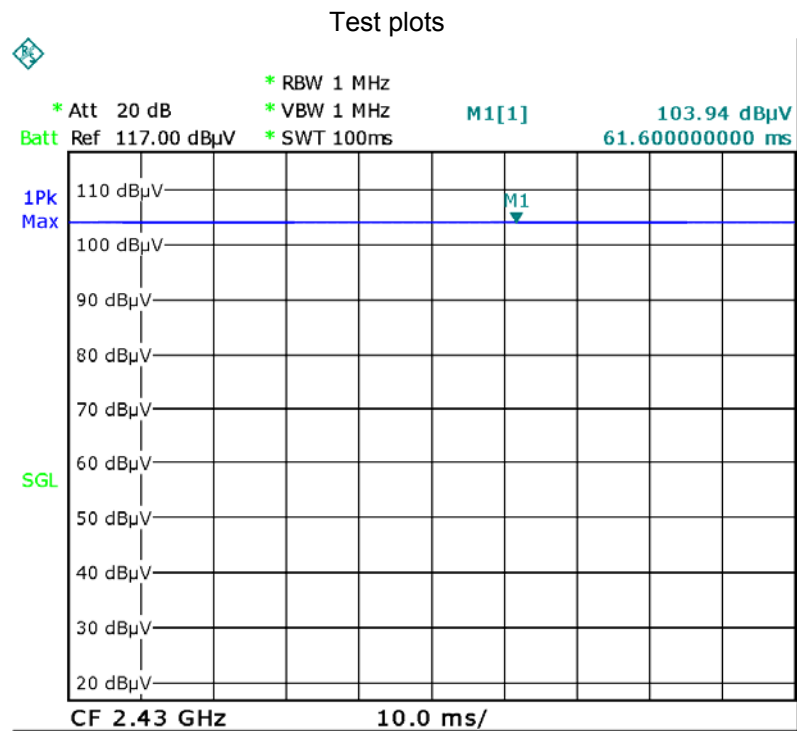


## 8 Outside of Band Emission

Test Requirement:	15.249(d):Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in §15.209, whichever is the lesser attenuation.
Test Method:	ANSI C63.10:2013
Test Mode:	Transmitting

### 8.1 Test Procedure

Refer to section 7.4 of this test report.

### 8.2 Test Result

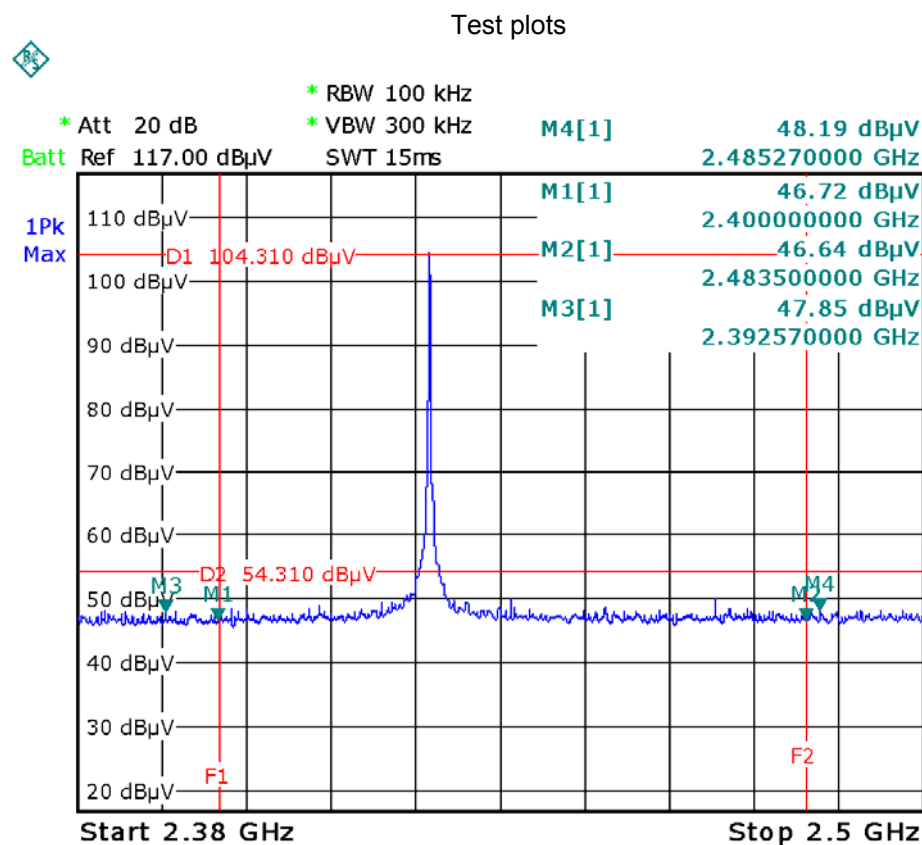

## 9 20 dB Bandwidth Measurement

Test Requirement: FCC CFR47 Part 15 Section 15.215(c)

Test Method: ANSI C63.10:2013

Test Mode: Transmitting


### 9.1 Test Procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer: RBW = 100KHz, VBW = 300KHz

### 9.2 Test Result

Frequency (MHz)	Bandwidth Emission (MHz)
2430	3.717

Test plots

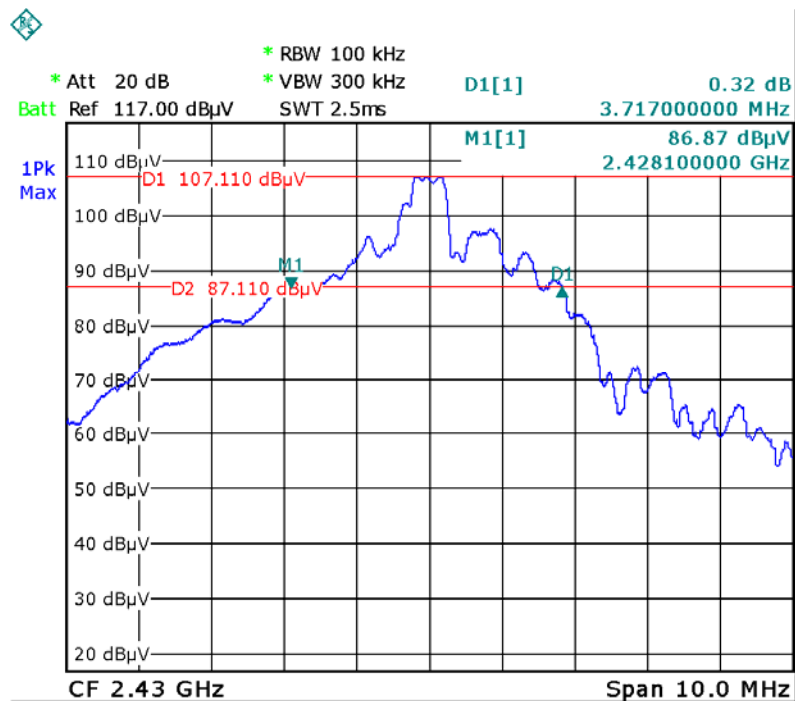

## **10 Antenna Requirement**


According to the FCC Part 15 Paragraph 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. This product has a PCB Printed Antenna , fulfil the requirement of this section.




## 11 Photographs- Model inxni-01 Test Setup

### 11.1 Photograph – Radiation Emission

Test frequency from 9KHz to 30MHz at test site 2#

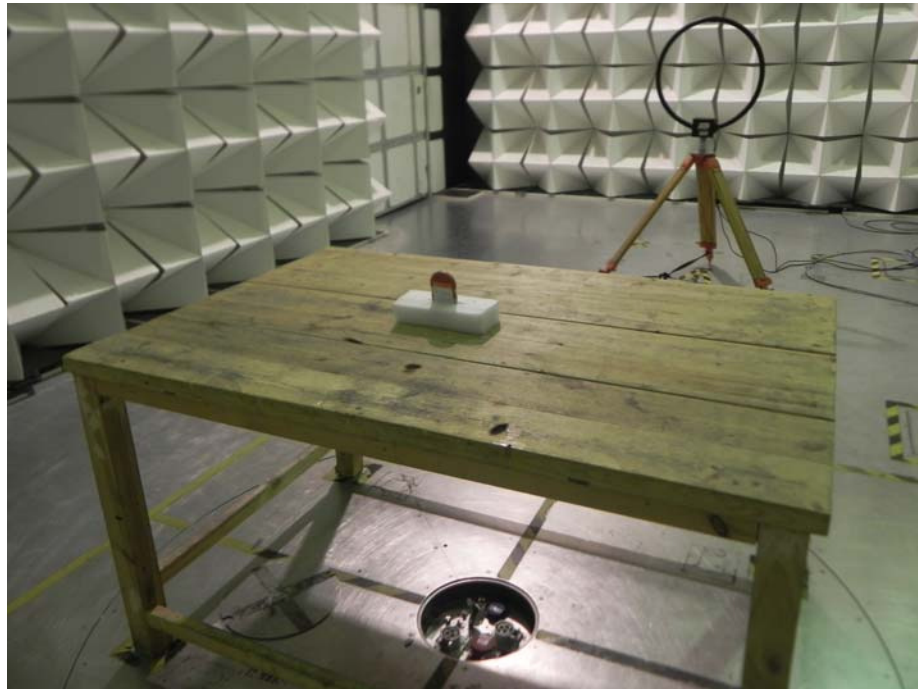

Test frequency from 30MHz to 1GHz at test site 2#

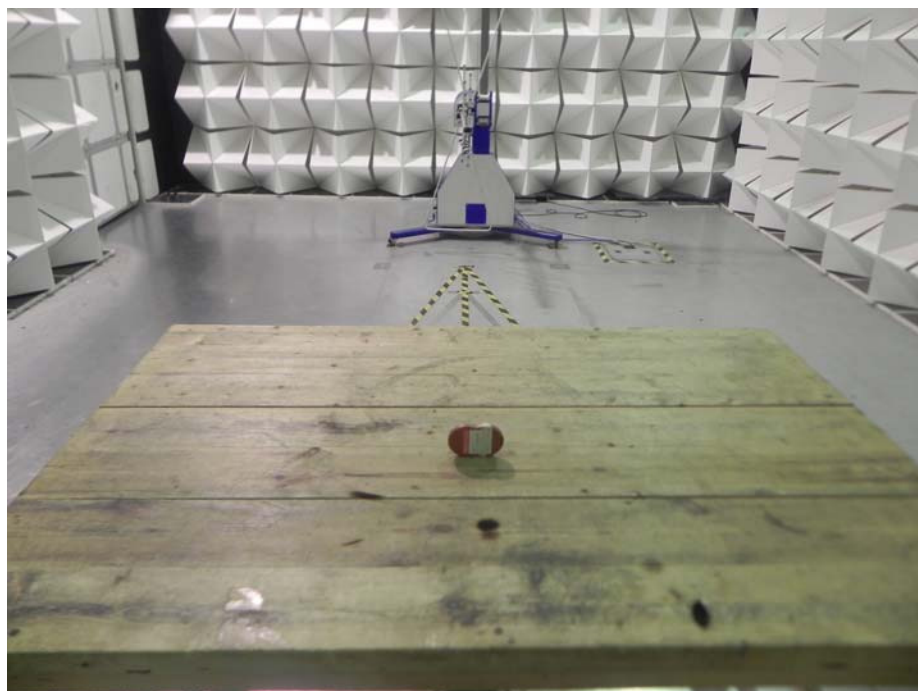


Test frequency above 1GHz at test site 1#



## 12 Photographs - Constructional Details

### 12.1 Model inxni-01- External Photos





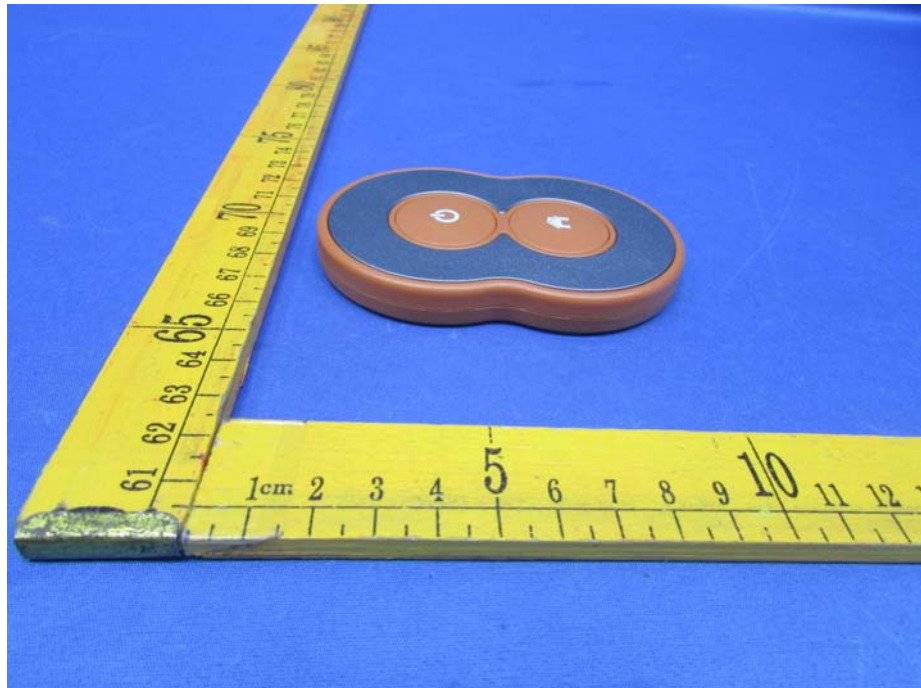







## 12.2 Model inxni-01- Internal Photos

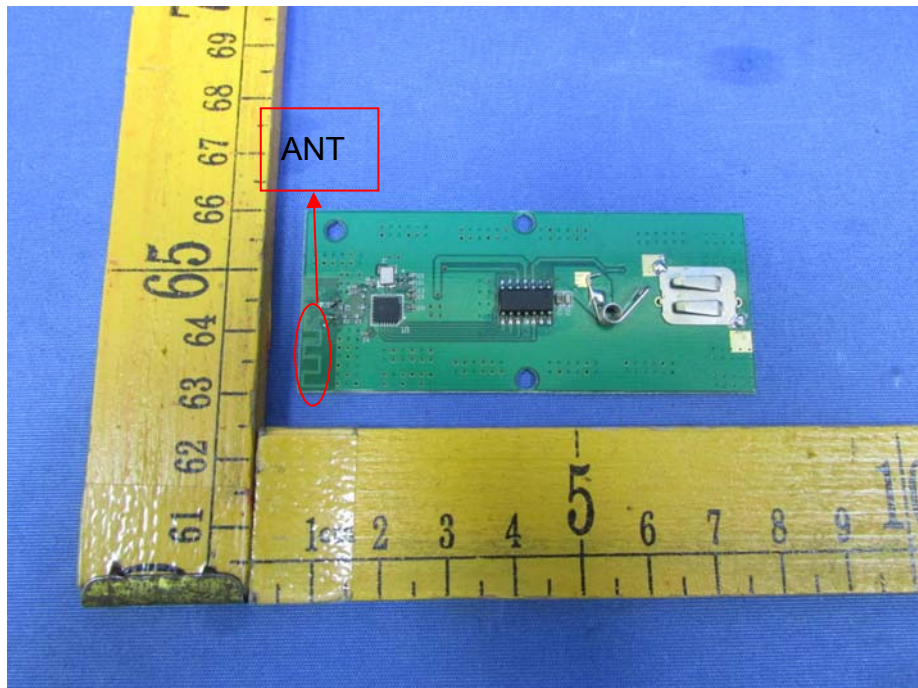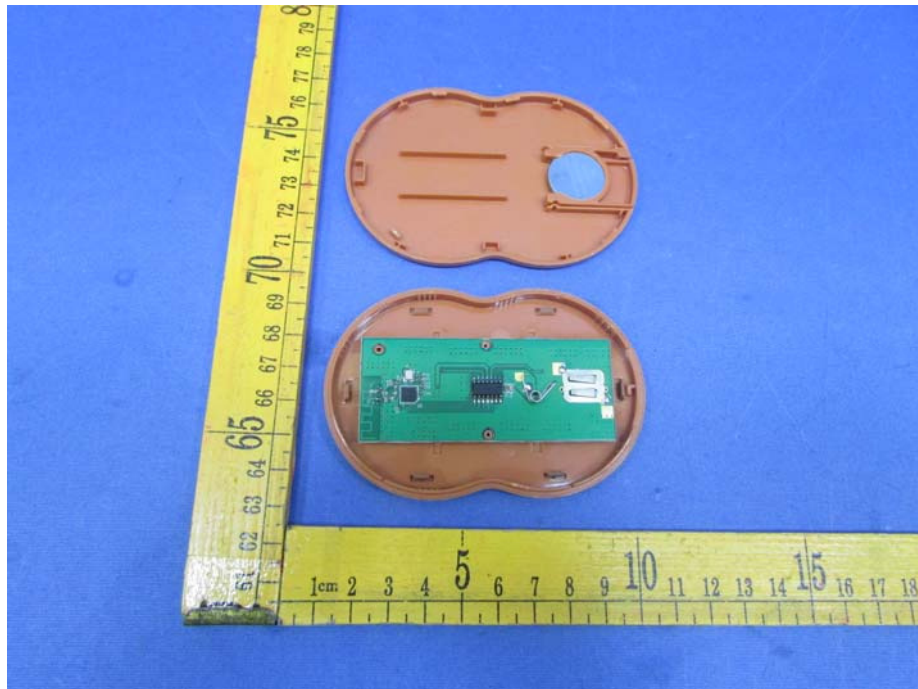



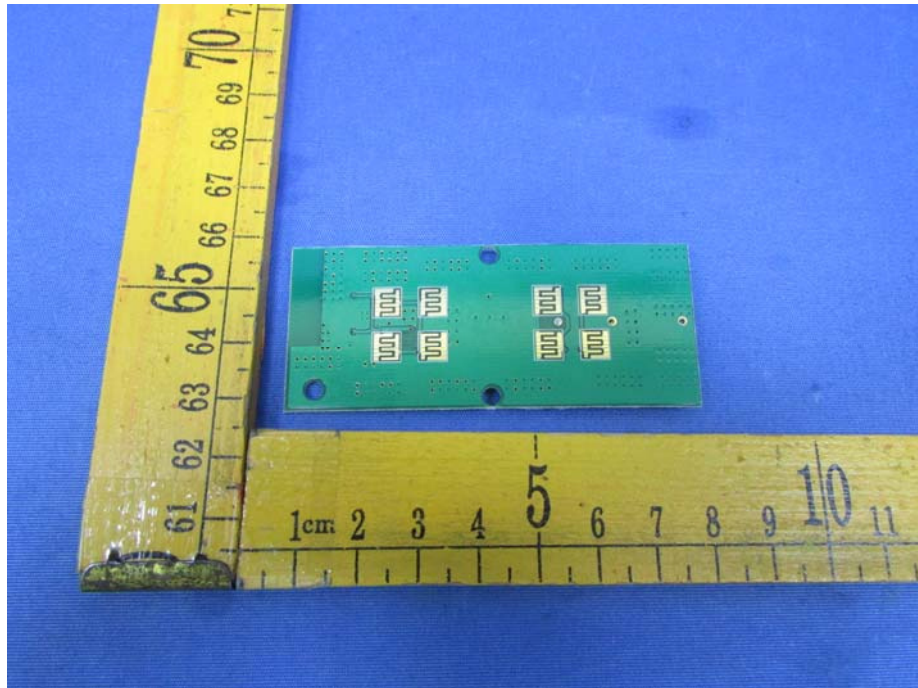

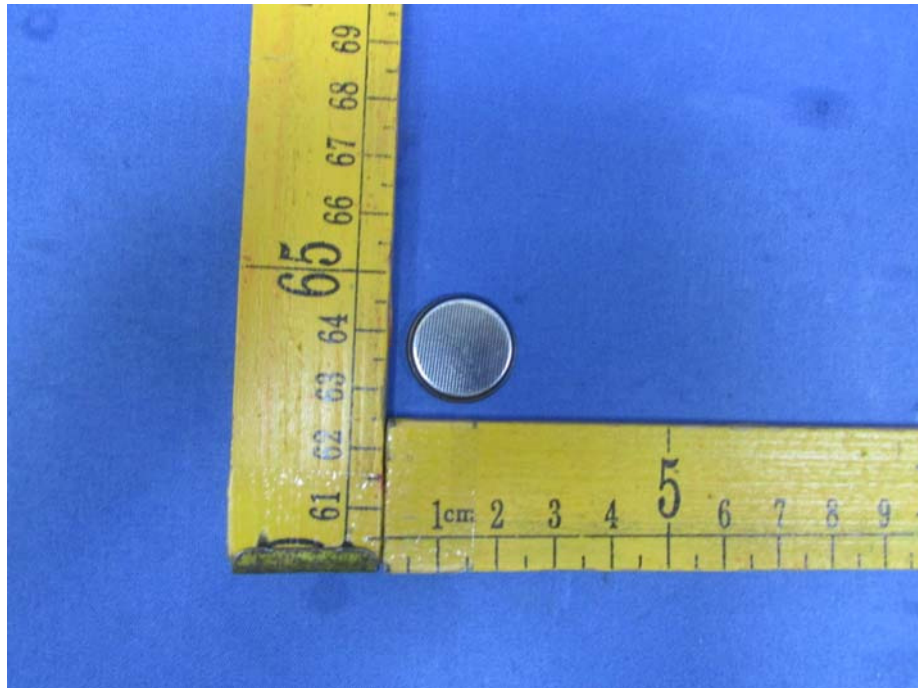

=====**End of Report**=====