

TEST REPORT

Application No.: HKEM2101000105AT
Applicant: Wise Ally Holdings Limited
Address of Applicant: Unit 3203-3207 , Tower 1 , Enterprise Square Five , Kowloon Bay , Hong Kong

Equipment Under Test (EUT):
EUT Name: Rapid Response Button
Model No.: AP82
FCC ID: 2AGEG-AP82
Standard(s) : 47 CFR Part 15, Subpart C 15.247
Date of Receipt: 2021-02-09
Date of Test: 2021-02-09 to 2021-02-16
Date of Issue: 2021-02-16

Test Result:	Pass*
---------------------	--------------

* In the configuration tested, the EUT complied with the standards specified above.




Law Man Kit
EMC Manager

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request and accessible at <http://www.sgs.com/en/Terms-and-conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-conditions.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. The document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Revision Record				
Version	Chapter	Date	Modifier	Remark
01		2021-02-16		Original

Authorized for issue by:			
			
		<hr/> Leo Xu /Project Engineer	Date: 2021-02-16
			
		<hr/> Law Man Kit /Reviewer	Date: 2021-02-16

2 Test Summary

Radio Spectrum Technical Requirement				
Item	Standard	Method	Requirement	Result
Antenna Requirement	47 CFR Part 15, Subpart C 15.247	N/A	47 CFR Part 15, Subpart C 15.203 & 15.247(b)(4)	Pass

Radio Spectrum Matter Part				
Item	Standard	Method	Requirement	Result
Conducted Emissions at AC Power Line (150kHz-30MHz)	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 6.2	47 CFR Part 15, Subpart C 15.207	Pass
Minimum 6dB Bandwidth	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 11.8.1	47 CFR Part 15, Subpart C 15.247a(2)	Pass
Conducted Peak Output Power	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 11.9.1	47 CFR Part 15, Subpart C 15.247(b)(3)	Pass
Power Spectrum Density	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 11.10.2	47 CFR Part 15, Subpart C 15.247(e)	Pass
Conducted Band Edges Measurement	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 11.13.3.2	47 CFR Part 15, Subpart C 15.247(d)	Pass
Conducted Spurious Emissions	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 11.11	47 CFR Part 15, Subpart C 15.247(d)	Pass
Radiated Emissions which fall in the restricted bands	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 6.10.5	47 CFR Part 15, Subpart C 15.209 & 15.247(d)	Pass
Radiated Spurious Emissions	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 6.4,6.5,6.6	47 CFR Part 15, Subpart C 15.209 & 15.247(d)	Pass

Declaration of EUT Family Grouping:

N/A

Abbreviation:

- Tx: In this whole report Tx (or tx) means Transmitter.
- Rx: In this whole report Rx (or rx) means Receiver.
- RF: In this whole report RF means Radiated Frequency.
- CH: In this whole report CH means channel.
- Volt: In this whole report Volt means Voltage.
- Temp: In this whole report Temp means Temperature.
- Humid: In this whole report Humid means humidity.
- Press: In this whole report Press means Pressure.
- N/A: In this whole report not application.

3 Contents

	Page
1 COVER PAGE	1
2 TEST SUMMARY	3
3 CONTENTS	4
4 GENERAL INFORMATION	6
4.1 DETAILS OF E.U.T.	6
4.1 DESCRIPTION OF SUPPORT UNITS	7
4.2 MODULATION CONFIGURATION	7
4.3 MEASUREMENT UNCERTAINTY	8
4.4 TEST LOCATION	9
4.5 TEST FACILITY	9
4.6 DEVIATION FROM STANDARDS	9
4.7 ABNORMALITIES FROM STANDARD CONDITIONS	9
5 EQUIPMENT LIST	10
6 RADIO SPECTRUM TECHNICAL REQUIREMENT	13
6.1 ANTENNA REQUIREMENT	13
6.1.1 <i>Test Requirement:</i>	13
6.1.2 <i>Conclusion:</i>	13
7 RADIO SPECTRUM MATTER TEST RESULTS	14
7.1 CONDUCTED EMISSIONS AT AC POWER LINE (150kHz-30MHz)	14
7.1.1 <i>E.U.T. Operation</i>	15
7.1.2 <i>Test Setup Diagram</i>	15
7.1.3 <i>Measurement Procedure and Data</i>	15
7.2 MINIMUM 6dB BANDWIDTH	18
7.2.1 <i>E.U.T. Operation</i>	18
7.2.2 <i>Test Setup Diagram</i>	18
7.2.3 <i>Measurement Procedure and Data</i>	18
7.3 CONDUCTED PEAK OUTPUT POWER	19
7.3.1 <i>E.U.T. Operation</i>	20
7.3.2 <i>Test Setup Diagram</i>	20
7.3.3 <i>Measurement Procedure and Data</i>	20
7.4 POWER SPECTRUM DENSITY	21
7.4.1 <i>E.U.T. Operation</i>	21
7.4.2 <i>Test Setup Diagram</i>	21
7.4.3 <i>Measurement Procedure and Data</i>	21
7.5 CONDUCTED BAND EDGES MEASUREMENT	22
7.5.1 <i>E.U.T. Operation</i>	23
7.5.2 <i>Test Setup Diagram</i>	23
7.5.3 <i>Measurement Procedure and Data</i>	23
7.6 CONDUCTED SPURIOUS EMISSIONS	24
7.6.1 <i>E.U.T. Operation</i>	25
7.6.2 <i>Test Setup Diagram</i>	25
7.6.3 <i>Measurement Procedure and Data</i>	25
7.7 RADIATED EMISSIONS WHICH FALL IN THE RESTRICTED BANDS	26
7.7.1 <i>E.U.T. Operation</i>	27
7.7.2 <i>Test Setup Diagram</i>	27

7.7.3	<i>Measurement Procedure and Data</i>	28
7.8	RADIATED SPURIOUS EMISSIONS	29
7.8.1	<i>E.U.T. Operation</i>	30
7.8.2	<i>Test Setup Diagram</i>	30
7.8.3	<i>Measurement Procedure and Data</i>	31
8	PHOTOGRAPHS	35
8.1	EUT CONSTRUCTIONAL DETAILS (EUT PHOTOS)	35
9	APPENDIX 15.247	36
9.1	PEAK CONDUCTED OUTPUT POWER	36
9.2	POWER SPECTRUM DENSITY	38
9.3	MINIMUM 6dB BANDWIDTH	39
9.4	CONDUCTED BAND EDGE MEASUREMENT	41
9.5	CONDUCTED SPURIOUS EMISSION	43

4 General Information

4.1 Details of E.U.T.

Power supply:	Adaptor Model: IEC 005 Input: AC 100 V - 240 V, 50/60 Hz, 0.75 A Output: DC 5 V, 1 A or Battery Model: SD364040 Output: DC 3.7 V, 1.85 Wh
Test voltage:	AC 120 V
Cable:	Power Cable: 18.8 cm unshielded 4-wire USB cable Data Cable: 18.8 cm unshielded 4-wire USB cable
Antenna Gain:	0 dBi
Antenna Type:	Monopole Antenna
Lora Radio Configuration:	US915
Channel Spacing:	LoRa (500 kHz): 1600 kHz
Modulation Type:	DBPSK
Number of Channels:	LoRa (500 kHz): 8
Operation Frequency:	LoRa (500 kHz): 903.0 MHz – 914.2 MHz
Series No.:	A1
Firmware Version:	1.0.8
Hardware Version:	4.2

Frequency List:

Channel	Frequency (MHz)
64	903.000000
65	904.600000
66	906.200000
67	907.800000
68	909.400000
69	911.000000
70	912.600000
71	914.200000

The frequencies under test are bolded.



4.1 Description of Support Units

Description	Manufacturer	Model No.	Serial No.
Laptop	DELL	P75F	H55LXQ2
Linear Adaptor	SGS HK Ltd	IEC 005	N/A
flash_download_tool_3.8.5.exe	PricewaterhouseCoopers Advisory Services LLC	N/A	N/A
ComTestSerial.exe	PricewaterhouseCoopers Advisory Services LLC	N/A	N/A

4.2 Modulation Configuration

RF software:	ComTestSerial.exe			
Modulation	Packet	Packet Type	Packet Size	Power
DBPSK	Default	Default	Default	22
Remark: 1. 22 value was set in test software as maximum output power setting.				

4.3 Measurement Uncertainty

RF

No.	Item	Measurement Uncertainty
1	Radio Frequency	$\pm 7.25 \times 10^{-8}$
2	Duty cycle	$\pm 0.37\%$
3	Occupied Bandwidth	$\pm 3\%$
4	RF conducted power (30MHz-40GHz)	1.5dB
5	RF power density	1.5dB
6	Conducted Spurious emissions	1.5dB
7	RF Radiated power & Radiated Spurious emission test	4.9dB (30MHz-1GHz)
		4.6dB (1GHz-6GHz)
		4.7dB (6GHz-18GHz)
		5.6dB (18GHz-40GHz)
8	Temperature test	$\pm 1^\circ\text{C}$
9	Humidity test	$\pm 3\%$
10	Supply voltages	$\pm 1.5\%$
11	Time	$\pm 3\%$

Remark:

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors in calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report according to TR-100028-01 "Electromagnetic compatibility and Radio spectrum Matters (ERM);Uncertainties in the measurement of mobile radio equipment characteristics; Part 1" and TR-100028-02 "Electromagnetic compatibility and Radio spectrum Matters (ERM);Uncertainties in the measurement of mobile radio equipment characteristics; Part 2" and is documented in the test lab quality system according to ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

4.4 Test Location

All tests were performed at:

SGS Hong Kong Limited
Unit 2 and 3, G/F, Block A, Po Lung Centre,
11 Wang Chiu Road, Kowloon Bay, Kowloon, Hong Kong
Tel: +852 2305 2570 Fax: +852 2756 4480

No tests were sub-contracted.

4.5 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

• **HOKLAS (Lab Code: 009)**

SGS Hong Kong Limited has been accepted by HKAS Executive, on the recommendation of the Accreditation Advisory Board, as a HOKLAS Accredited Laboratory, this laboratory meets the requirements of ISO/IEC 17025:2017 and it has been accredited for performing specific tests as listed in the scope of accreditation within the test category of Electrical and Electronic Products.

• **IAS Accreditation (Lab Code: TL-187)**

SGS Hong Kong Limited has met the requirements of AC89, IAS Accreditation Criteria for Testing Laboratories, and has demonstrated compliance with ISO/IEC Standard 17025:2017, General requirements for the competence of testing and calibration laboratories. This organization is accredited to provide the services specified in the scope of accreditation maintained on the IAS website (www.iasonline.org).

The report must not be used by the client to claim product certification, approval, or endorsement by IAS, NIST, or any agency of the Federal Government.

• **FCC Recognized Accredited Test Firm (CAB Registration No.: 514599)**

SGS Hong Kong Limited has been accredited and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Designation Number: HK0015, Test Firm Registration Number: 514599.

• **Industry Canada (Site Registration No.: 26103; CAB Identifier No.: HK0015)**

SGS Hong Kong Limited has been recognized by Department of Innovation, Science and Economic Development (ISED) Canada as a wireless testing laboratory. The acceptance letter from the ISED is maintained in our files. CAB Identifier No: HK0015, Site Registration Number: 26103.

4.6 Deviation from Standards

None

4.7 Abnormalities from Standard Conditions

None

5 Equipment List

Conducted Emissions at AC Power Line (150kHz-30MHz)					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
EMI Test Receiver 9kHz to 3.6GHz	Rohde & Schwarz	ESR3 / 102326	E231	2020/08/31	2021/08/30
Artificial Mains Network (LISN)	Schwarzbeck	NSLK 8127 / 8127312	E005	2020/05/12	2021/05/11
Impulse Limiter	Rohde & Schwarz	ESH-3-Z2 / 357881052	E028	2020/09/12	2021/09/11
EMC32 Test software	Rohde & Schwarz	Version 10	N/A	N/A	N/A

Minimum 6dB Bandwidth					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
SMBV100A VECTOR SIGNAL GENERATOR	Rohde & Schwarz	SMBV100A	E234	2020/08/31	2021/08/30
FSV40 SIGNAL ANALYZER 40GHz	Rohde & Schwarz	FSV40	E235	2020/08/31	2021/08/30
Wireless Conn. Tester (CMW)	Rohde & Schwarz	CMW270	E240	CAL IN USE	CAL IN USE
OSP	Rohde & Schwarz	OSP-B157W8	E242	2020/08/31	2021/08/30
Cable	Rohde & Schwarz	J12J103539-00-2	E239	2020/09/21	2021/09/20
Cable	Rohde & Schwarz	J12J103539-00-2	E239	2020/09/21	2021/09/20
WMS32 Test software	Rohde & Schwarz	N/A	Version 11	N/A	N/A

Conducted Peak Output Power					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
SMBV100A VECTOR SIGNAL GENERATOR	Rohde & Schwarz	SMBV100A	E234	2020/08/31	2021/08/30
FSV40 SIGNAL ANALYZER 40GHz	Rohde & Schwarz	FSV40	E235	2020/08/31	2021/08/30
Wireless Conn. Tester (CMW)	Rohde & Schwarz	CMW270	E240	CAL IN USE	CAL IN USE
OSP	Rohde & Schwarz	OSP-B157W8	E242	2020/08/31	2021/08/30
Cable	Rohde & Schwarz	J12J103539-00-2	E239	2020/09/21	2021/09/20
Cable	Rohde & Schwarz	J12J103539-00-2	E239	2020/09/21	2021/09/20
WMS32 Test software	Rohde & Schwarz	N/A	Version 11	N/A	N/A

Power Spectrum Density					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
SMBV100A VECTOR SIGNAL GENERATOR	Rohde & Schwarz	SMBV100A	E234	2020/08/31	2021/08/30
FSV40 SIGNAL ANALYZER 40GHZ	Rohde & Schwarz	FSV40	E235	2020/08/31	2021/08/30
Wireless Conn. Tester (CMW)	Rohde & Schwarz	CMW270	E240	CAL IN USE	CAL IN USE
OSP	Rohde & Schwarz	OSP-B157W8	E242	2020/08/31	2021/08/30
Cable	Rohde & Schwarz	J12J103539-00-2	E239	2020/09/21	2021/09/20
Cable	Rohde & Schwarz	J12J103539-00-2	E239	2020/09/21	2021/09/20
WMS32 Test software	Rohde & Schwarz	N/A	Version 11	N/A	N/A

Conducted Band Edges Measurement					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
SMBV100A VECTOR SIGNAL GENERATOR	Rohde & Schwarz	SMBV100A	E234	2020/08/31	2021/08/30
FSV40 SIGNAL ANALYZER 40GHZ	Rohde & Schwarz	FSV40	E235	2020/08/31	2021/08/30
Wireless Conn. Tester (CMW)	Rohde & Schwarz	CMW270	E240	CAL IN USE	CAL IN USE
OSP	Rohde & Schwarz	OSP-B157W8	E242	2020/08/31	2021/08/30
Cable	Rohde & Schwarz	J12J103539-00-2	E239	2020/09/21	2021/09/20
Cable	Rohde & Schwarz	J12J103539-00-2	E239	2020/09/21	2021/09/20
WMS32 Test software	Rohde & Schwarz	N/A	Version 11	N/A	N/A

Conducted Spurious Emissions					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
SMBV100A VECTOR SIGNAL GENERATOR	Rohde & Schwarz	SMBV100A	E234	2020/08/31	2021/08/30
FSV40 SIGNAL ANALYZER 40GHZ	Rohde & Schwarz	FSV40	E235	2020/08/31	2021/08/30
Wireless Conn. Tester (CMW)	Rohde & Schwarz	CMW270	E240	CAL IN USE	CAL IN USE
OSP	Rohde & Schwarz	OSP-B157W8	E242	2020/08/31	2021/08/30
Cable	Rohde & Schwarz	J12J103539-00-2	E239	2020/09/21	2021/09/20
Cable	Rohde & Schwarz	J12J103539-00-2	E239	2020/09/21	2021/09/20
WMS32 Test software	Rohde & Schwarz	N/A	Version 11	N/A	N/A

Radiated Spurious Emissions					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
3m Semi-Anechoic Chamber	ChamPro	N/A	E229	2020/08/09	2021/08/08
Coaxial Cable	SGS	N/A	E167	2020/07/20	2021/07/19
EMI Test Receiver 9kHz to 7GHz	Rohde & Schwarz	ESR7 / 102298	E314	2020/05/18	2021/05/18
TRILOG Super Broadb. Test Antenna, (25) 30-1000 MHz	Schwarzbeck	9168-1110	E311	2020/02/13	2022/02/12
EMC32 Test software	Rohde & Schwarz	Version 10	N/A	N/A	N/A
Spectrum Analyzer 9kHz - 30GHz	Rohde & Schwarz	FSP30	E204	2020/05/11	2021/05/10
Horn Antenna 1 - 18GHz	Schwarzbeck	BBHA9120D	E211	2020/03/11	2022/03/10
Preamplifier 33dB, 1 - 18GHz	Schwarzbeck	BBV9718	E214	2020/04/09	2021/04/08
Band Reject Filter WRCGV10-891.69- 901.69-928.32-938.32- 45TT	Wainwright	WRCGV10- 891.69-901.69- 928.32-938.32- 45TT	E278	2019/05/06	2021/05/05
RF cable SMA to SMA 1000mm	HUBER+SUHNER	SF104- 26.5/2*11SMA 45	E207	2020/09/21	2021/09/20
Boresight Mast Controller	ChamPro	AM-BS-4500-E	E237	N/A	N/A
Turntable with Controller	ChamPro	EM1000	E238	N/A	N/A

General used equipment					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
Digital temperature & humidity data logger	SATO	SK-L200TH II	E232	2020/09/12	2021/09/11
Electronic Digital Thermometer with Hygrometer	nil	2074/2075	E159	2020/09/12	2021/09/11
Barometer with digital thermometer	SATO	7612-00	E218	2020/4/23	2021/04/22
Conditional Chamber	Zhong Zhi Testing Instruments	CZ-E-608D	E216	2020/8/31	2021/08/30

6 Radio Spectrum Technical Requirement

6.1 Antenna Requirement

6.1.1 Test Requirement:

47 CFR Part 15, Subpart C 15.203 & 15.247(b)(4)


6.1.2 Conclusion

Standard Requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

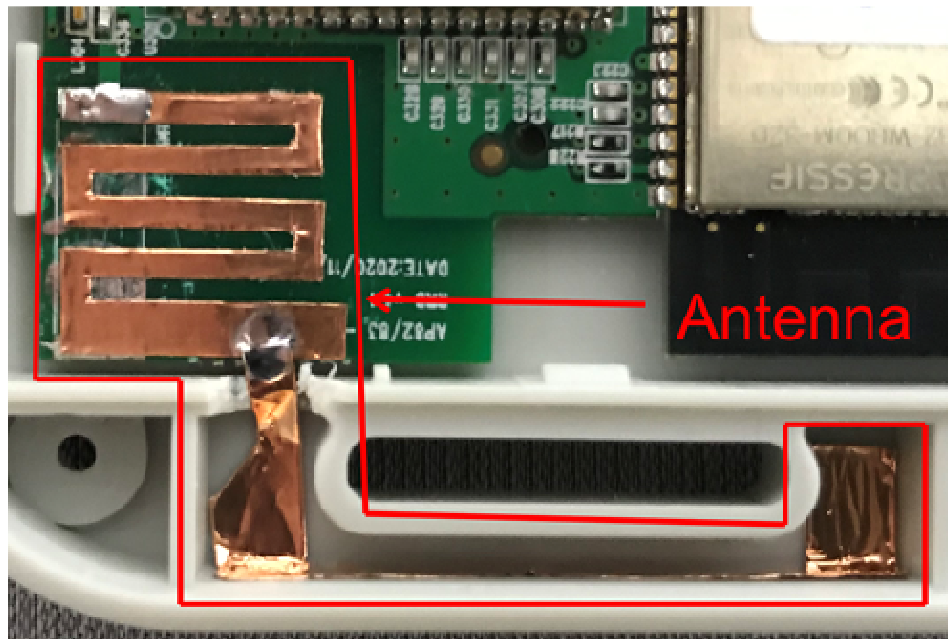

EUT Antenna:

The antenna is integrated on the main PCB and no consideration of replacement. The best case gain of the antenna is 0 dBi.

Antenna location: Refer to internal photo.



7 Radio Spectrum Matter Test Results

7.1 Conducted Emissions at AC Power Line (150kHz-30MHz)

Test Requirement 47 CFR Part 15, Subpart C 15.207
Test Method: ANSI C63.10 (2013) Section 6.2
Limit:

Frequency of emission(MHz)	Conducted limit(dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


7.1.1 E.U.T. Operation

Operating Environment:

Temperature: 25 °C Humidity: 50 % RH :

Test mode a: Charge + TX mode_Keep the EUT in charging and continuously transmitting mode with DPQSK modulation. All modes have been tested and only the data of worst case (500 kHz) is recorded in the report.

7.1.2 Test Setup Diagram

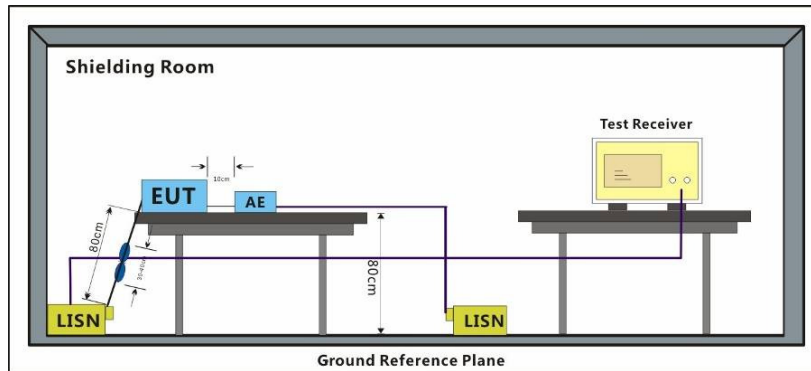


7.1.3 Measurement Procedure and Data

- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50ohm/50μH + 5ohm linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
- 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,
- 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.
- 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.

Remark: LISN=Read Level+ Cable Loss+ LISN Factor

Mode:a; Line:Live Line


Full Spectrum

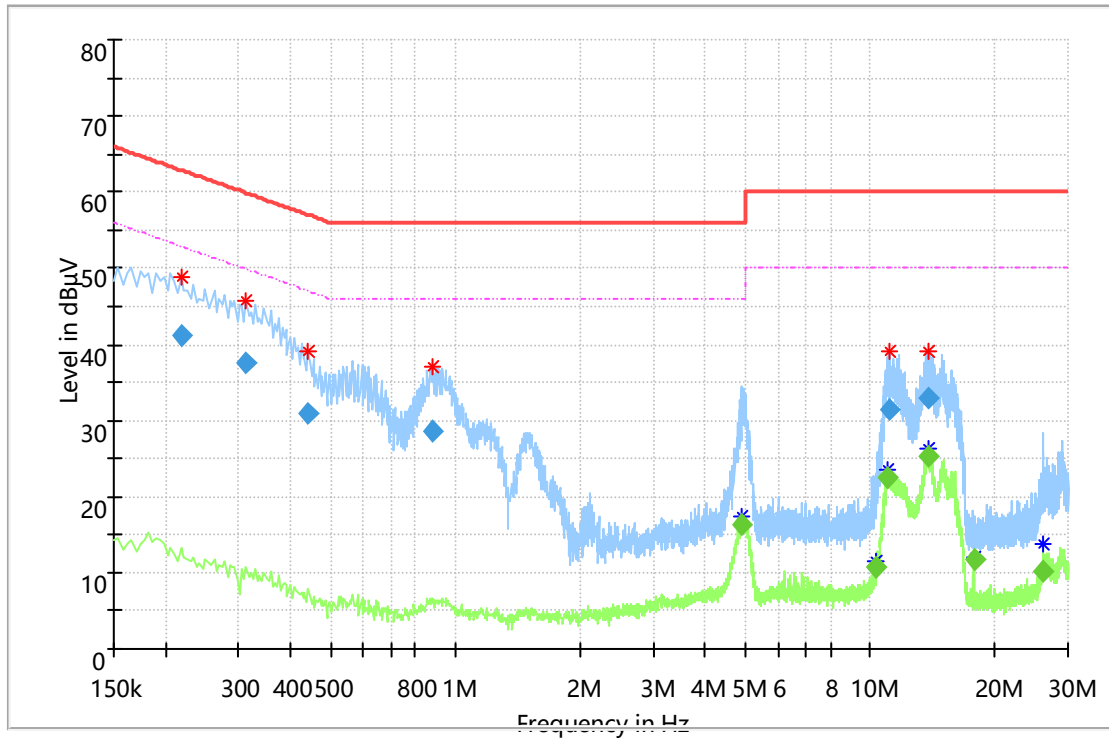

Frequency (MHz)	QuasiPeak (dBµV)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Corr. (dB)	Result
0.218000	41.1	---	62.9	21.8	10.1	Pass
0.314000	37.6	---	59.9	22.2	10.0	Pass
0.442000	30.8	---	57.0	26.2	10.1	Pass
0.882000	28.6	---	56.0	27.4	10.1	Pass
4.890000	---	16.4	46.0	29.6	10.1	Pass
10.354000	---	10.8	50.0	39.3	10.1	Pass
11.022000	---	22.4	50.0	27.6	10.2	Pass
11.146000	31.5	---	60.0	28.5	10.6	Pass
13.778000	33.0	---	60.0	27.0	11.0	Pass
13.862000	---	25.3	50.0	24.7	11.3	Pass
17.778000	---	11.9	50.0	38.2	11.2	Pass
25.950000	---	10.3	50.0	39.7	11.1	Pass

Mode:a; Line:Neutral Line

Full Spectrum

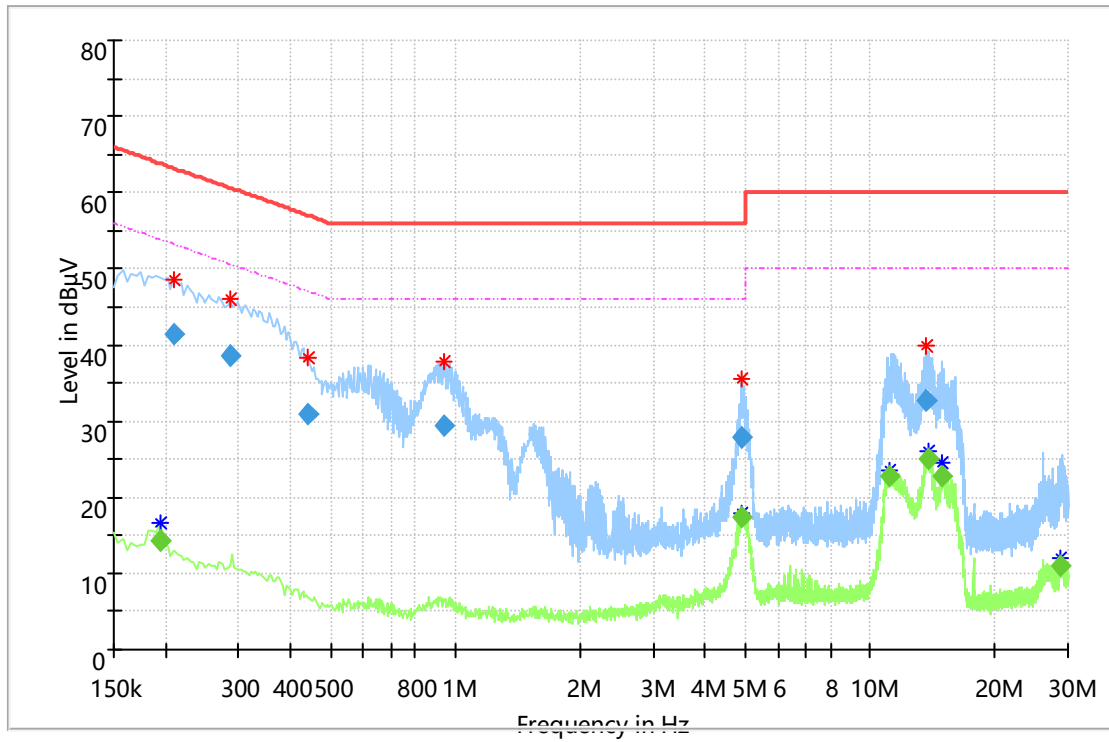

Frequency (MHz)	QuasiPeak (dBµV)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Corr. (dB)	Result
0.194000	---	14.4	53.9	39.4	10.1	Pass
0.210000	41.4	---	63.2	21.8	10.0	Pass
0.286000	38.5	---	60.6	22.2	10.1	Pass
0.442000	31.0	---	57.0	26.1	10.1	Pass
0.938000	29.4	---	56.0	26.6	10.1	Pass
4.902000	---	17.4	46.0	28.6	10.1	Pass
4.910000	27.8	---	56.0	28.2	10.2	Pass
11.070000	---	22.7	50.0	27.3	10.6	Pass
13.718000	32.6	---	60.0	27.4	11.0	Pass
13.798000	---	25.0	50.0	25.0	11.3	Pass
14.934000	---	22.6	50.0	27.4	11.2	Pass
28.818000	---	11.1	50.0	39.0	11.1	Pass

7.2 Minimum 6dB Bandwidth

Test Requirement 47 CFR Part 15, Subpart C 15.247a(2)
 Test Method: ANSI C63.10 (2013) Section 11.8.1
 Limit: ≥ 500 kHz


7.2.1 E.U.T. Operation

Operating Environment:

Temperature: 25 °C Humidity: 50 % RH :

Test mode a: Charge + TX mode. Keep the EUT in charging and continuously transmitting mode with DPQSK modulation. All modes have been tested and only the data of worst case (500 kHz) is recorded in the report.

7.2.2 Test Setup Diagram

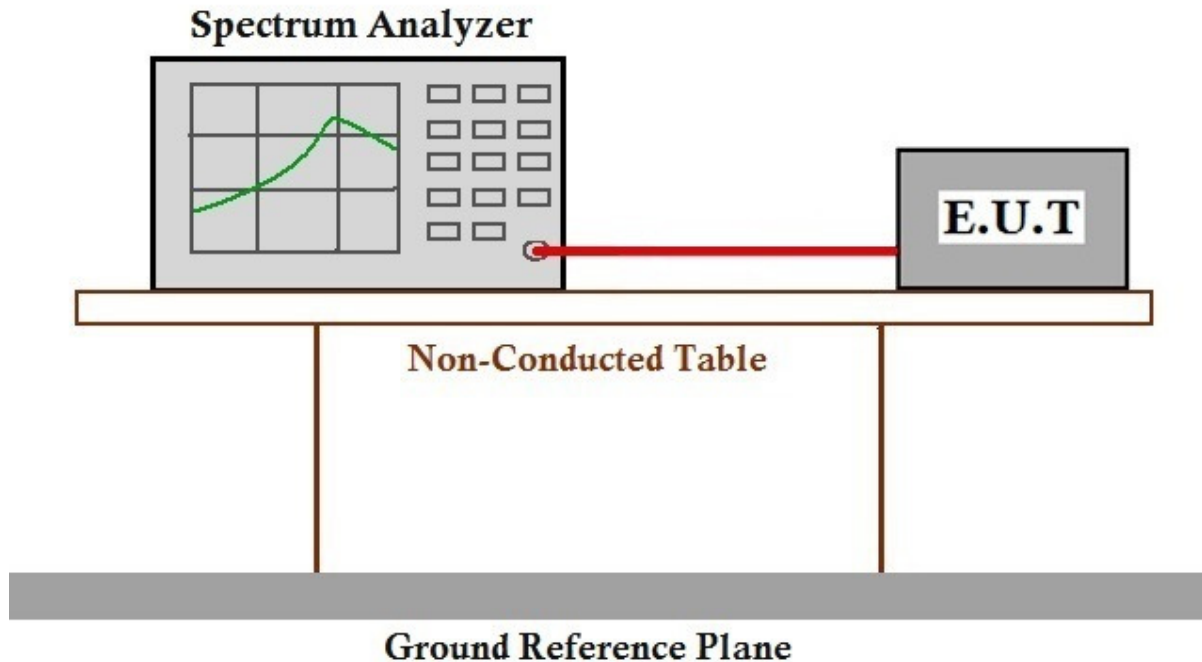

7.2.3 Measurement Procedure and Data

The test method: ANSI C63.10 (2013) Section 11.8.1

The detailed test data see: Appendix 15.247

7.3 Conducted Peak Output Power

Test Requirement 47 CFR Part 15, Subpart C 15.247(b)(3)
 Test Method: ANSI C63.10 (2013) Section 11.9.1
 Limit:

Frequency range(MHz)	Output power of the intentional radiator(watt)
902-928	1 for ≥ 50 hopping channels
	0.25 for $25 \leq$ hopping channels < 50
	1 for digital modulation
2400-2483.5	1 for ≥ 75 non-overlapping hopping channels
	0.125 for all other frequency hopping systems
	1 for digital modulation
5725-5850	1 for frequency hopping systems and digital modulation


7.3.1 E.U.T. Operation

Operating Environment:

Temperature: 25 °C Humidity: 50 % RH :

Test mode a: Charge + TX mode_Keep the EUT in charging and continuously transmitting mode with DPQSK modulation. All modes have been tested and only the data of worst case (500 kHz) is recorded in the report.

7.3.2 Test Setup Diagram

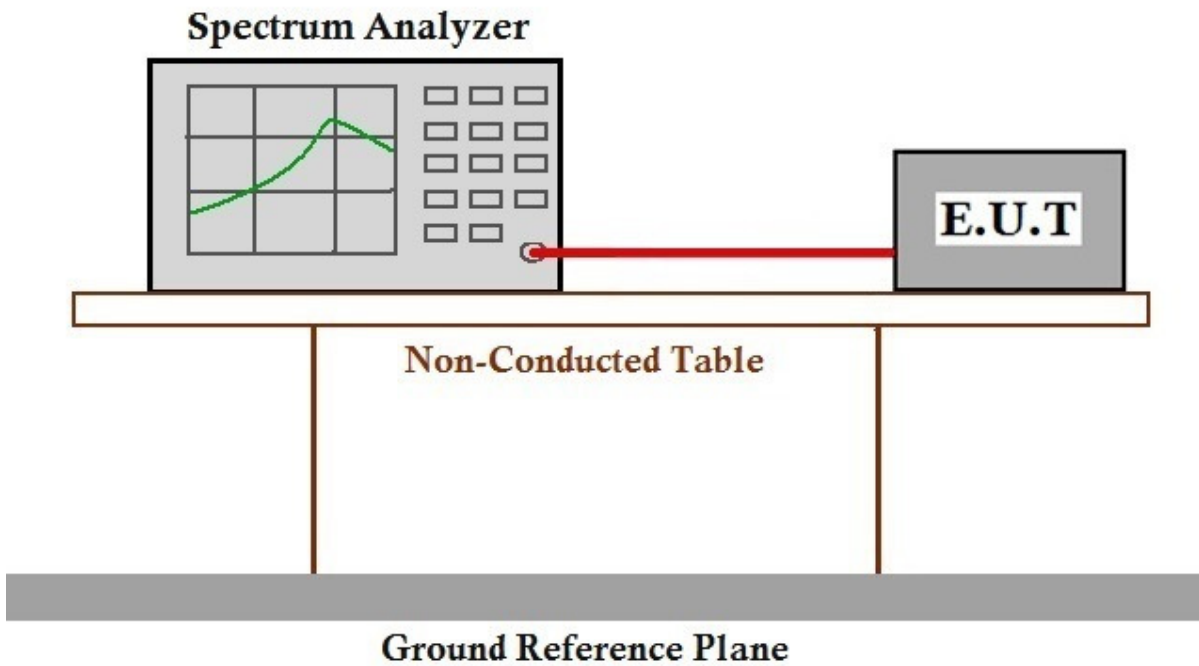

7.3.3 Measurement Procedure and Data

The test method: ANSI C63.10 (2013) Section 11.9.1

The detailed test data see: Appendix 15.247

7.4 Power Spectrum Density

Test Requirement 47 CFR Part 15, Subpart C 15.247(e)
 Test Method: ANSI C63.10 (2013) Section 11.10.2
 Limit: $\leq 8\text{dBm}$ in any 3 kHz band during any time interval of continuous transmission


7.4.1 E.U.T. Operation

Operating Environment:

Temperature: 25 °C Humidity: 50 % RH :

Test mode a: Charge + TX mode Keep the EUT in charging and continuously transmitting mode with DPQSK modulation. All modes have been tested and only the data of worst case (500 kHz) is recorded in the report.

7.4.2 Test Setup Diagram

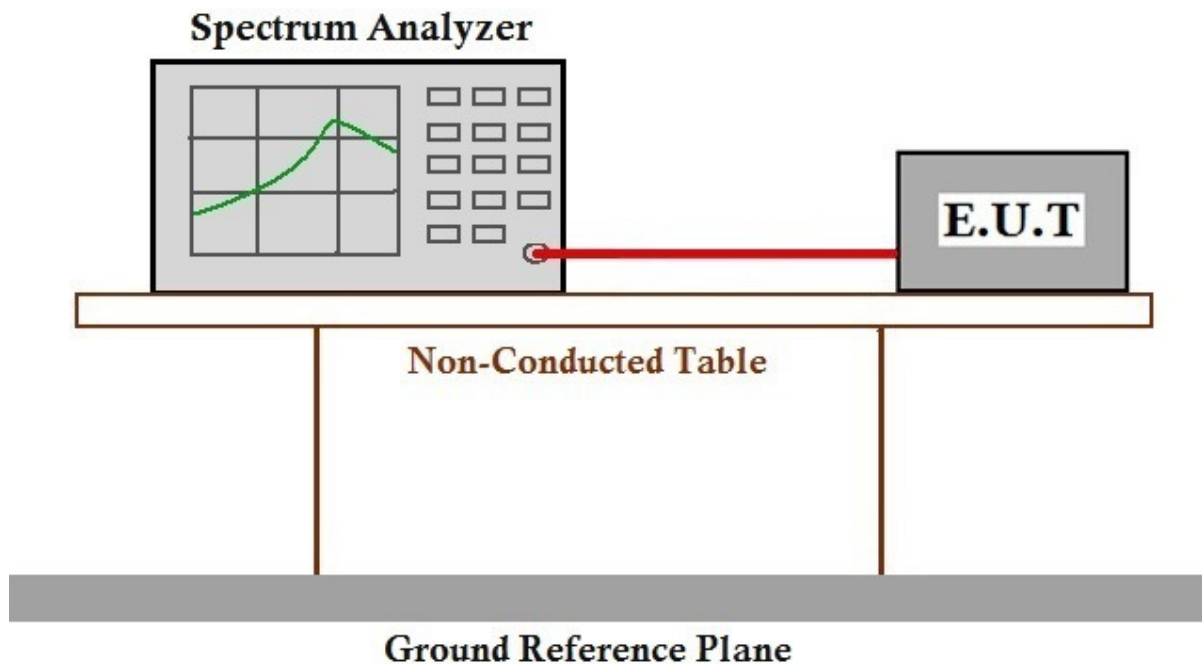

7.4.3 Measurement Procedure and Data

The test method: ANSI C63.10 (2013) Section 11.10.2

The detailed test data see: Appendix 15.247

7.5 Conducted Band Edges Measurement

Test Requirement	47 CFR Part 15, Subpart C 15.247(d)
Test Method:	ANSI C63.10 (2013) Section 11.13.3.2
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c))


7.5.1 E.U.T. Operation

Operating Environment:

Temperature: 25 °C Humidity: 50 % RH :

Test mode a: Charge + TX mode_Keep the EUT in charging and continuously transmitting mode with DPQSK modulation. All modes have been tested and only the data of worst case (500 kHz) is recorded in the report.

7.5.2 Test Setup Diagram

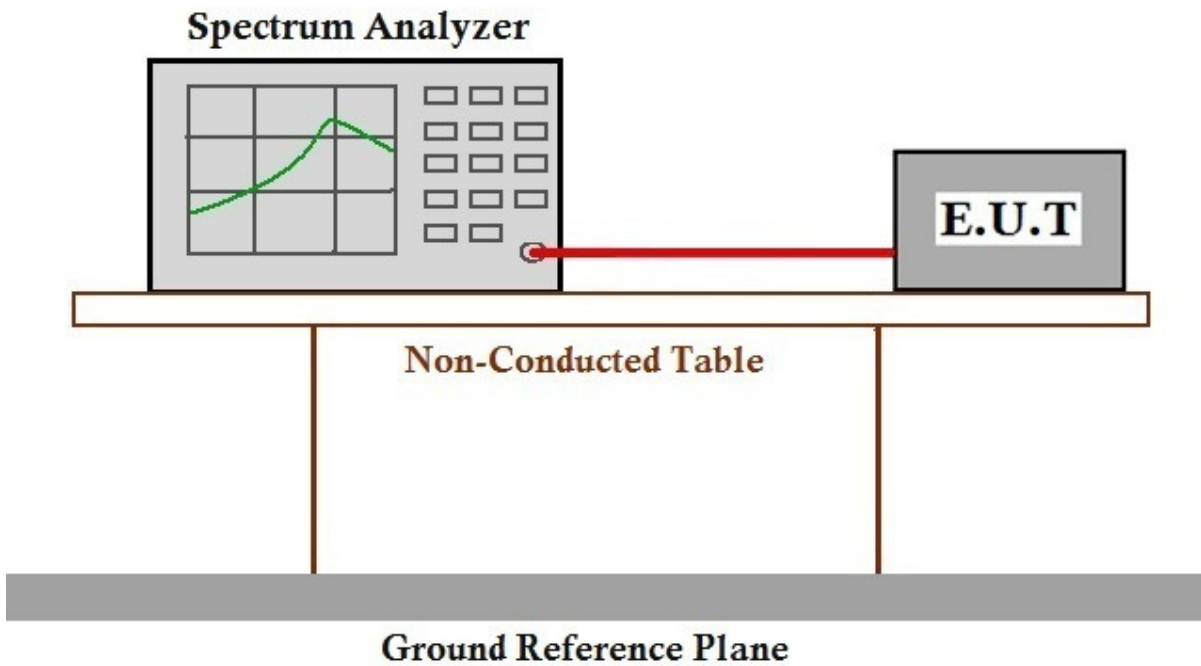

7.5.3 Measurement Procedure and Data

The test method: ANSI C63.10 (2013) Section 11.13.3.2

The detailed test data see: Appendix 15.247

7.6 Conducted Spurious Emissions

Test Requirement 47 CFR Part 15, Subpart C 15.247(d)

Test Method: ANSI C63.10 (2013) Section 11.11

Limit: In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c))


7.6.1 E.U.T. Operation

Operating Environment:

Temperature: 25 °C Humidity: 50 % RH :

Test mode a: Charge + TX mode_Keep the EUT in charging and continuously transmitting mode with DPQSK modulation. All modes have been tested and only the data of worst case (500 kHz) is recorded in the report.

7.6.2 Test Setup Diagram

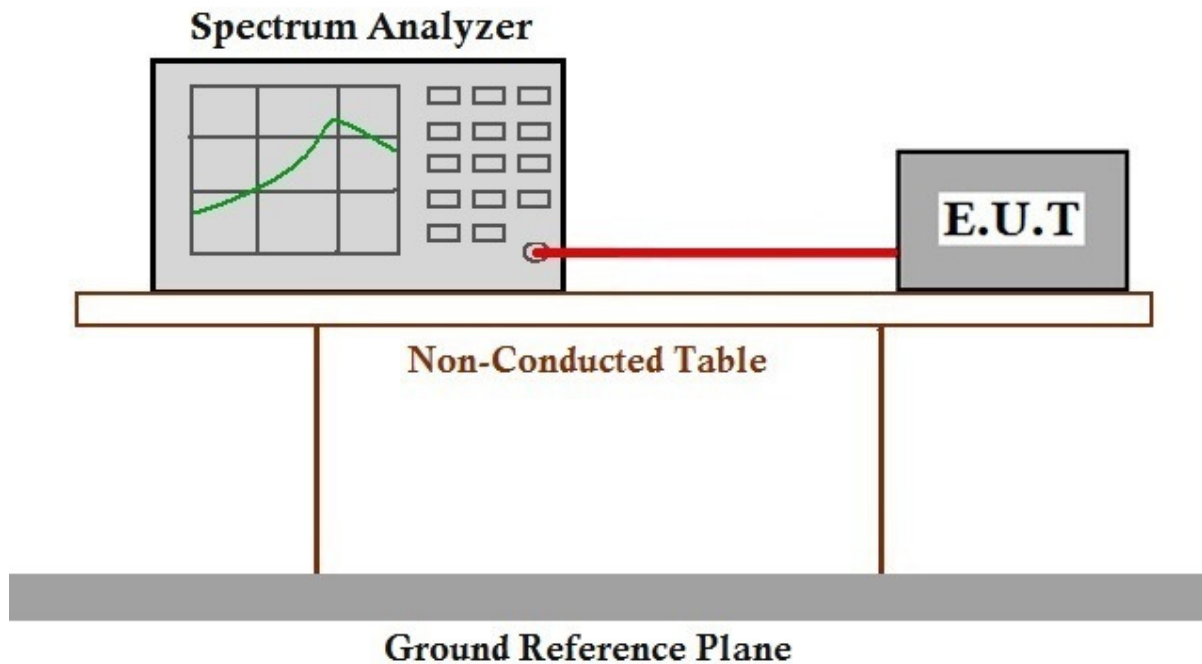

7.6.3 Measurement Procedure and Data

The test method: ANSI C63.10 (2013) Section 11.11

The detailed test data see: Appendix 15.247



7.7 Radiated Emissions which fall in the restricted bands

Test Requirement 47 CFR Part 15, Subpart C 15.209 & 15.247(d)
Test Method: ANSI C63.10 (2013) Section 6.10.5
Measurement Distance: 3m
Limit:

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.


7.7.1 E.U.T. Operation

Operating Environment:

Temperature: 25 °C Humidity: 50 % RH :

Test mode a: Charge + TX mode_Keep the EUT in charging and continuously transmitting mode with DPQSK modulation. All modes have been tested and only the data of worst case (500 kHz) is recorded in the report.

7.7.2 Test Setup Diagram

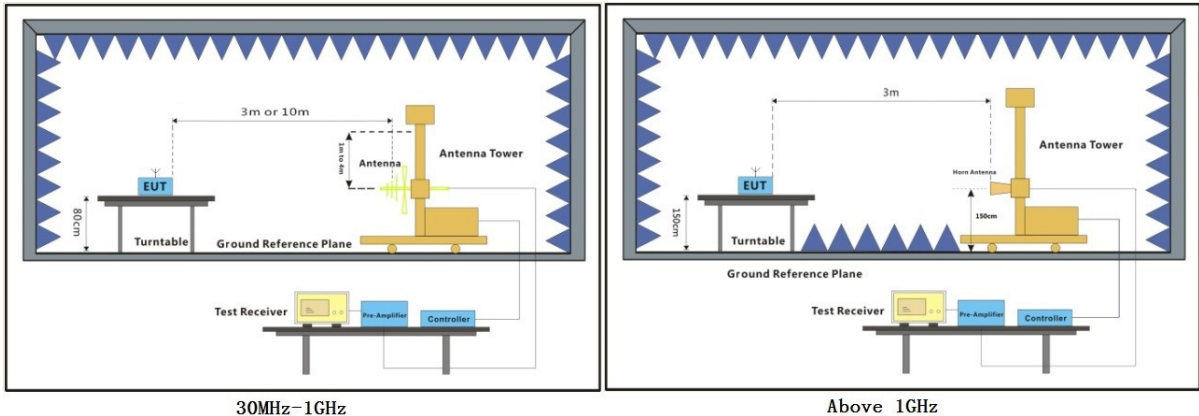

7.7.3 Measurement Procedure and Data

- a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- d. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- e. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- f. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- g. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- h. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- j. Repeat above procedures until all frequencies measured was complete.

Remark 1: Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor

Remark 2: For frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.

Frequency (MHz)	Antenna Polarization	Emission Level (dBµV/m)		Limit (dBµV/m)		Remark
		Peak	Average	Peak	Average	
614.000000	H	36.0	19.3	74.0	54.0	Pass
960.000000	H	45.8	29.1	74.0	54.0	Pass
614.000000	V	34.2	16.9	74.0	54.0	Pass
960.000000	V	39.4	22.1	74.0	54.0	Pass



7.8 Radiated Spurious Emissions

Test Requirement 47 CFR Part 15, Subpart C 15.209 & 15.247(d)
Test Method: ANSI C63.10 (2013) Section 6.4,6.5,6.6
Measurement Distance: 3m
Limit:

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.


7.8.1 E.U.T. Operation

Operating Environment:

Temperature: 25 °C Humidity: 50 % RH :


Test mode a: Charge + TX mode_Keep the EUT in charging and continuously transmitting mode with DPQSK modulation. All modes have been tested and only the data of worst case (500 kHz) is recorded in the report.

7.8.2 Test Setup Diagram

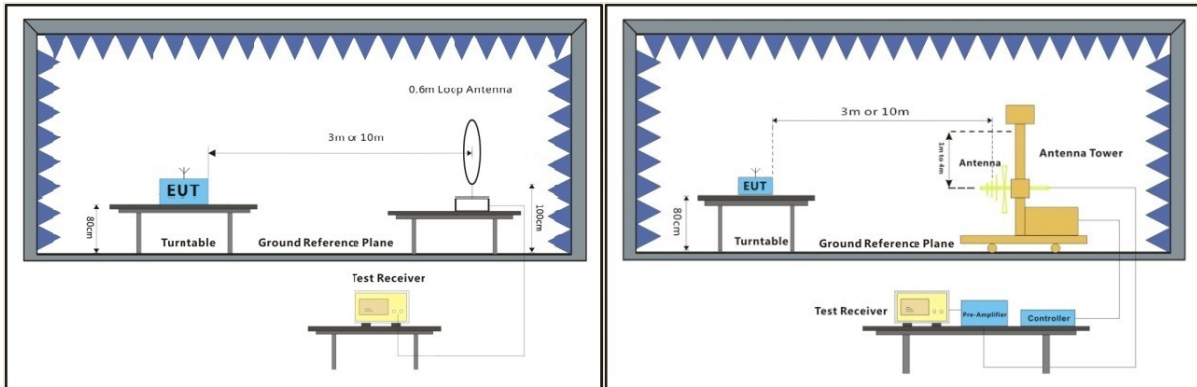

Below 30MHz

30MHz-1GHz

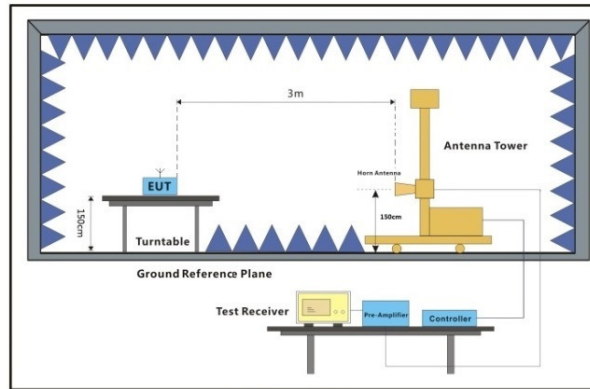

Above 1GHz

7.8.3 Measurement Procedure and Data


- a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- d. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- e. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- f. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- g. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- h. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- j. Repeat above procedures until all frequencies measured was complete.

Remark:

- 1) For emission below 1GHz, through pre-scan found the worst case is the lowest channel. Only the worst case is recorded in the report.
 - 2) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:
Final Test Level = Receiver Reading + Antenna Factor + Cable Factor – Preamplifier Factor
 - 3) Scan from 9kHz to 25GHz, the disturbance above 18GHz and below 30MHz was very low. The points marked on above plots are the highest emissions could be found when testing, so only above points had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.
 - 4) For frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.
-


Radiated emission below 1GHz

Mode:b; Polarization:Horizontal; Modulation:DBPSK;

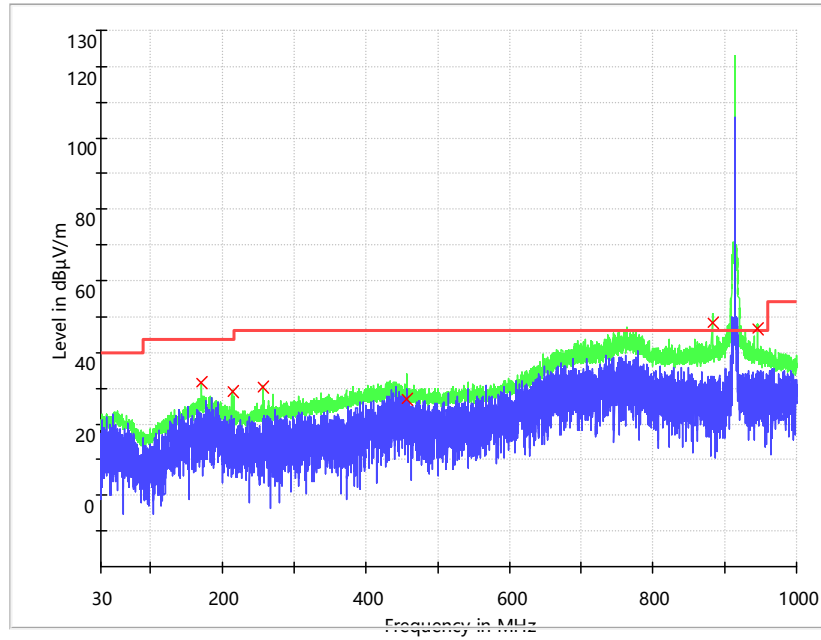

Frequency (MHz)	QuasiPeak (dBµV/m)	Pol.	Corr. (dB/m)	Margin (dB)	Limit (dBµV/m)	Result
170.360000	31.4	H	14.0	12.1	43.5	Pass
213.000000	28.9	H	11.1	14.6	43.5	Pass
255.594286	30.3	H	13.1	15.7	46.0	Pass
457.080000	27.0	H	18.9	19.0	46.0	Pass
882.075714	48.5	H	25.4	-2.5	46.0	Fail
946.026429	46.7	H	26.7	-0.7	46.0	Fail

Mode:b; Polarization:Vertical; Modulation: DBPSK;

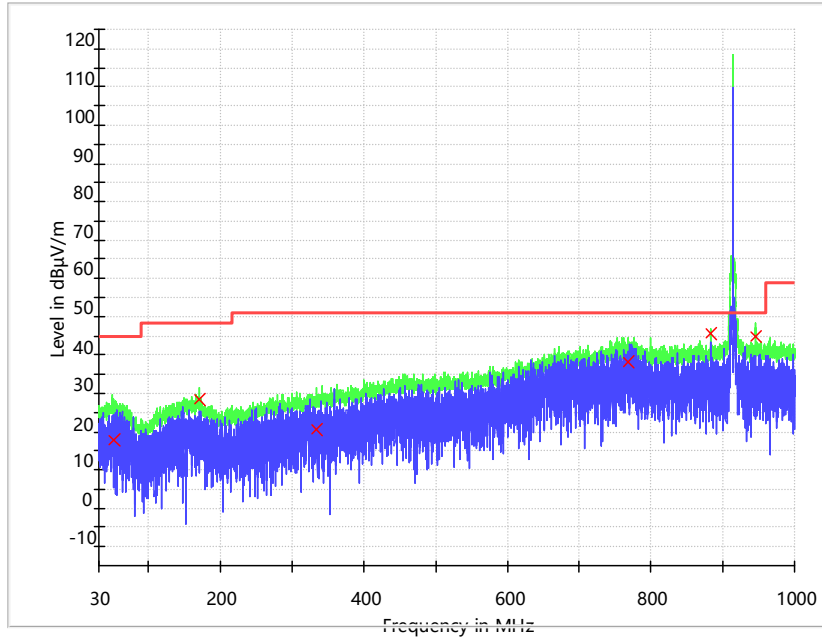

Frequency (MHz)	QuasiPeak (dBµV/m)	Pol.	Corr. (dB/m)	Margin (dB)	Limit (dBµV/m)	Result
50.439286	12.9	V	14.2	27.1	40.0	Pass
170.372857	23.3	V	14.0	20.2	43.5	Pass
333.055714	15.7	V	15.9	30.4	46.0	Pass
768.308571	33.3	V	24.7	12.8	46.0	Pass
882.352857	40.8	V	25.4	5.2	46.0	Pass
946.095714	39.8	V	26.7	6.2	46.0	Pass

Remark: Only the worst case is shown.

Above 1GHz

Channel:Low

Frequency (MHz)	Antenna Polarization	Emission Level (dB μ V/m)		Limit (dB μ V/m)		Remark
		Peak	Average	Peak	Average	
1805.500	H	45.2	39.0	74.0	54.0	PASS
3612.000	H	43.8	34.5	74.0	54.0	PASS
4515.500	H	45.9	34.6	74.0	54.0	PASS
2013.000	V	43.6	23.6	74.0	54.0	PASS
3613.000	V	44.2	31.6	74.0	54.0	PASS
4542.000	V	44.0	30.4	74.0	54.0	PASS

Channel:Middle

Frequency (MHz)	Antenna Polarization	Emission Level (dB μ V/m)		Limit (dB μ V/m)		Remark
		Peak	Average	Peak	Average	
1816.000	H	45.2	40.1	74.0	54.0	PASS
3631.500	H	43.8	33.7	74.0	54.0	PASS
4540.500	H	45.8	31.8	74.0	54.0	PASS
1990.000	V	46.9	26.3	74.0	54.0	PASS
3631.000	V	43.9	34.6	74.0	54.0	PASS
3983.500	V	46.5	28.2	74.0	54.0	PASS

Channel: High

Frequency (MHz)	Antenna Polarization	Emission Level (dB μ V/m)		Limit (dB μ V/m)		Remark
		Peak	Average	Peak	Average	
1827.500	H	44.7	36.3	74.0	54.0	PASS
3656.500	H	43.8	34.5	74.0	54.0	PASS
4593.500	H	42.8	29.5	74.0	54.0	PASS
1991.000	V	50.1	25.9	74.0	54.0	PASS
3658.000	V	43.9	31.1	74.0	54.0	PASS
4634.000	V	43.6	29.8	74.0	54.0	PASS



8 Photographs

8.1 EUT Constructional Details (EUT Photos)


Refer to the appendices setup, external and internal photos.



9 Appendix 15.247

9.1 Peak conducted output power

DUT Frequency (MHz)	Peak Power (dBm)	Limit Max (dBm)	Result
903.000000	21.6	30.0	PASS
907.800000	21.7	30.0	PASS
914.200000	21.7	30.0	PASS


Remark: Antenna gain is 0 dBi

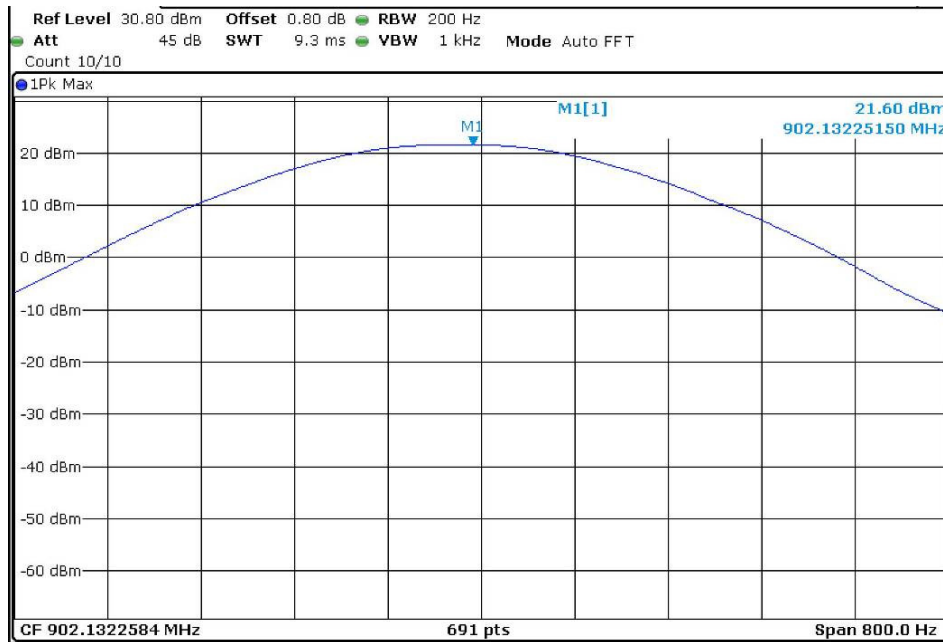

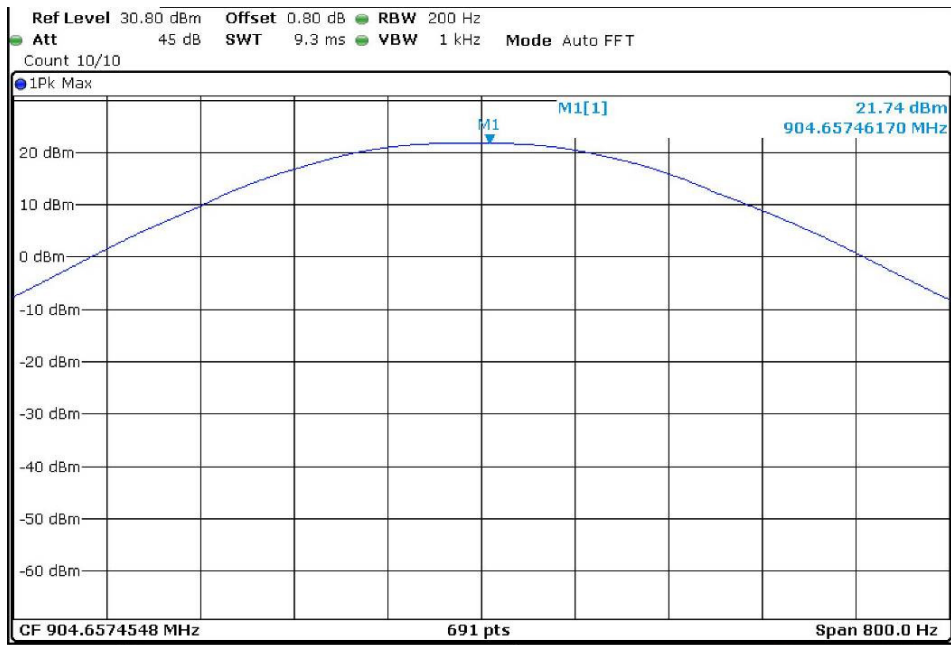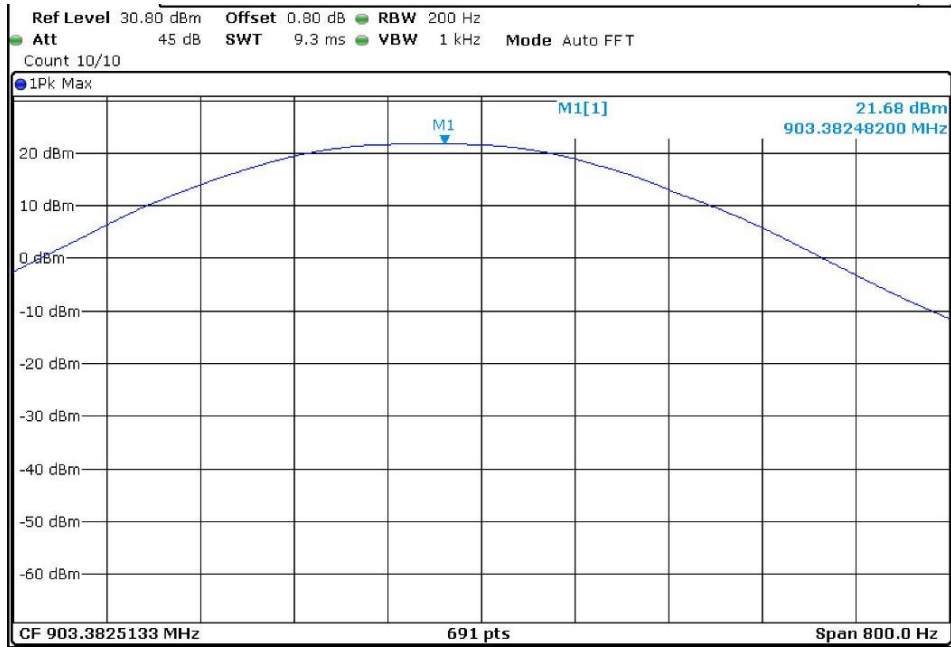


9.2 Power Spectrum Density


DUT Frequency (MHz)	Frequency (MHz)	PSD (dBm)	Limit Max (dBm)	Result
903.000000	903.208400	2.68	8.0	PASS

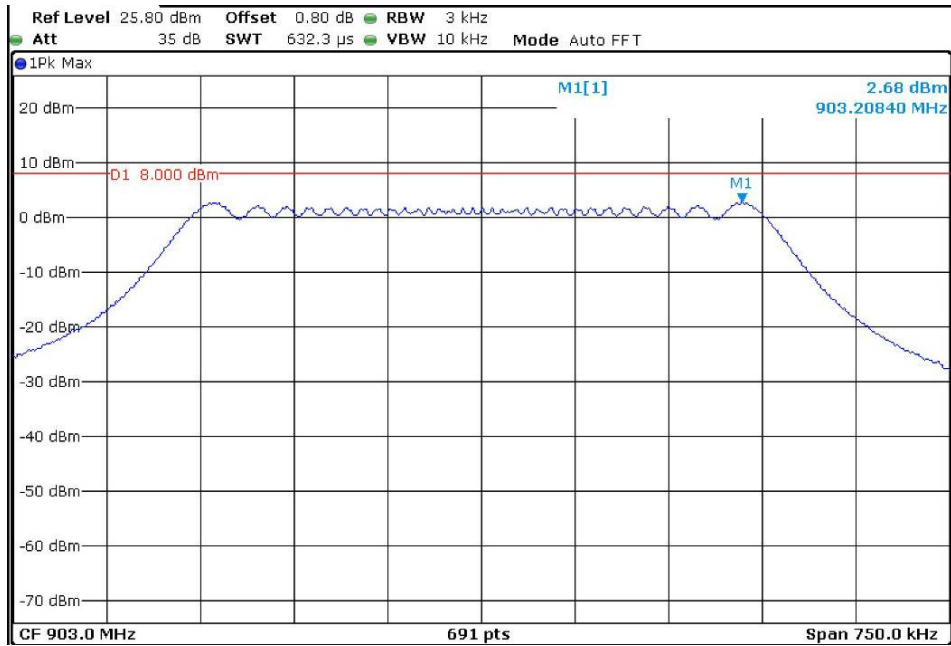

DUT Frequency (MHz)	Frequency (MHz)	PSD (dBm)	Limit Max (dBm)	Result
907.800000	908.008400	2.68	8.0	PASS


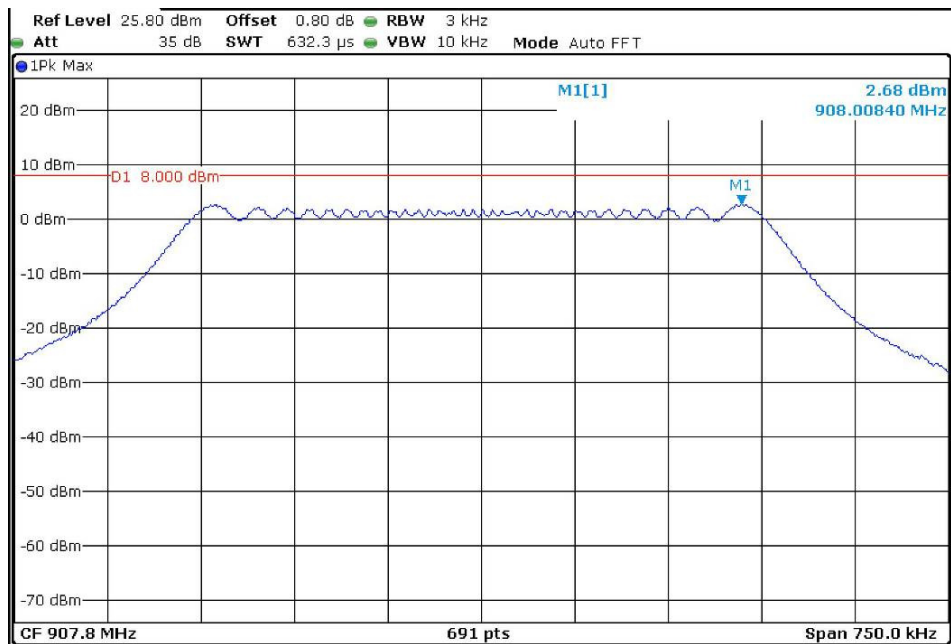



DUT Frequency (MHz)	Frequency (MHz)	PSD (dBm)	Limit Max (dBm)	Result
914.200000	913.98620	3.16	8.0	PASS

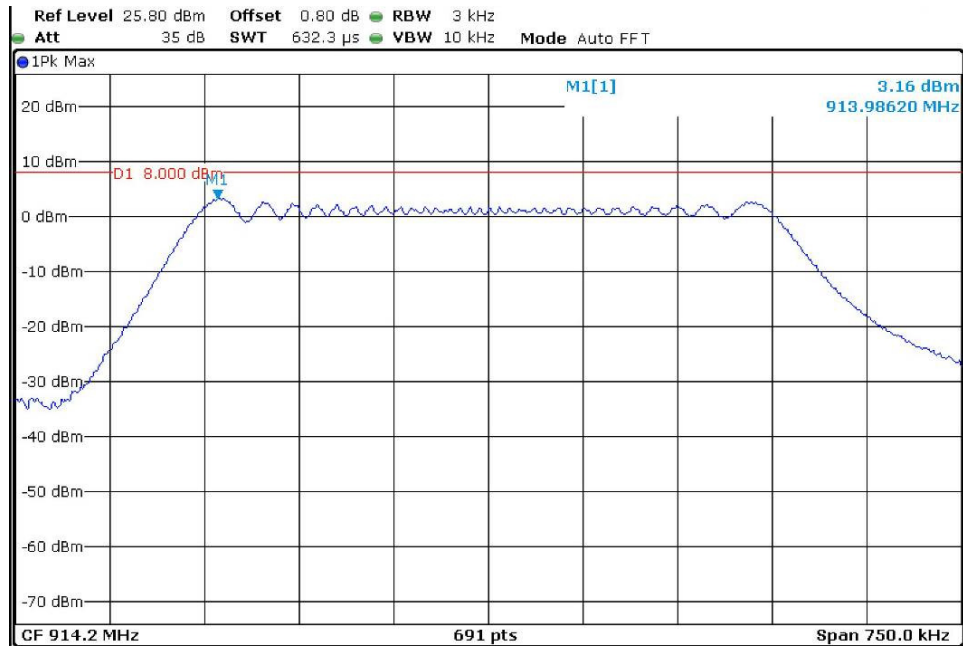

9.3 Minimum 6dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
903.000000	0.620800	0.500000	---	902.691800	903.312600
907.800000	0.625200	0.500000	---	907.483100	908.108200
914.200000	0.620800	0.500000	---	913.891800	914.512600

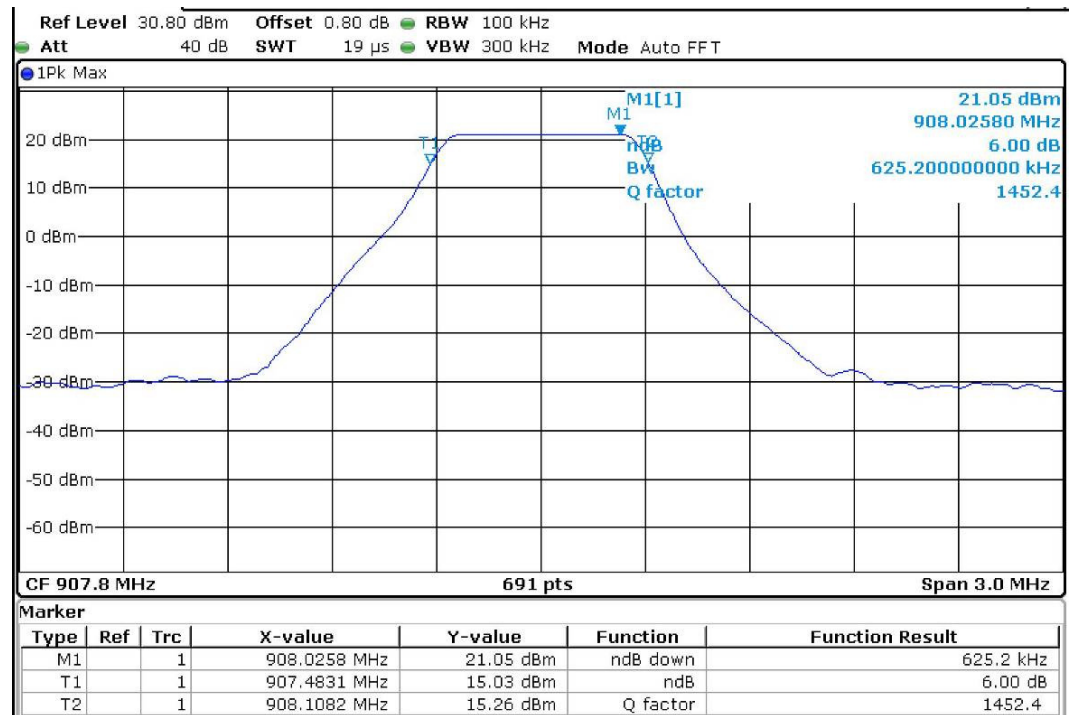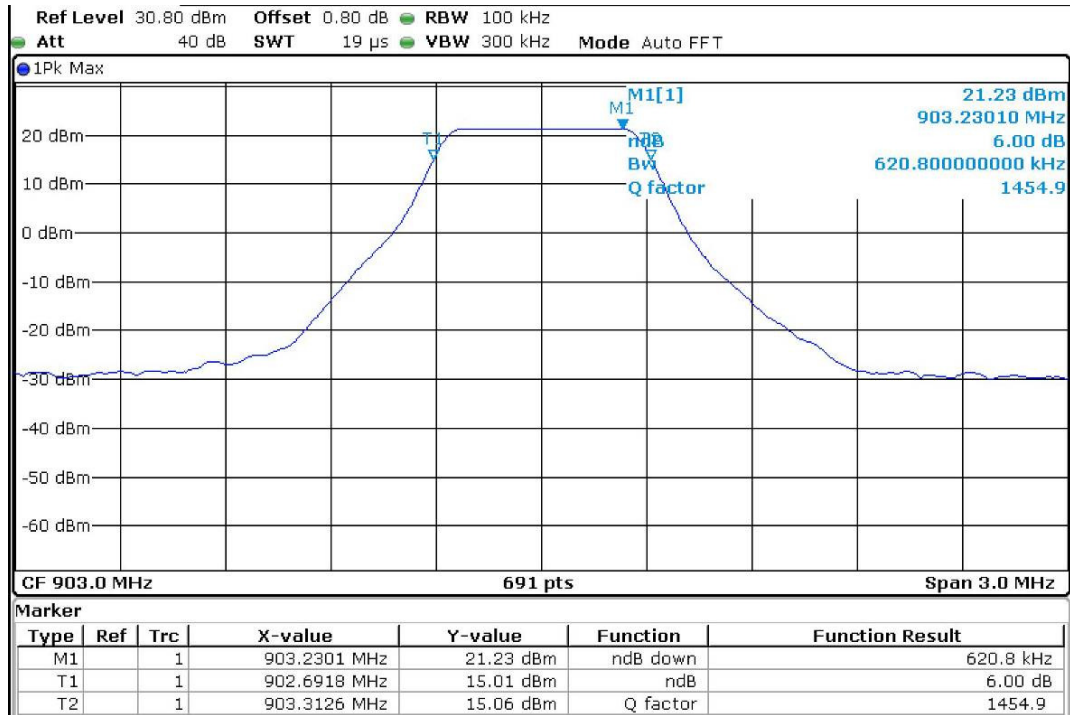

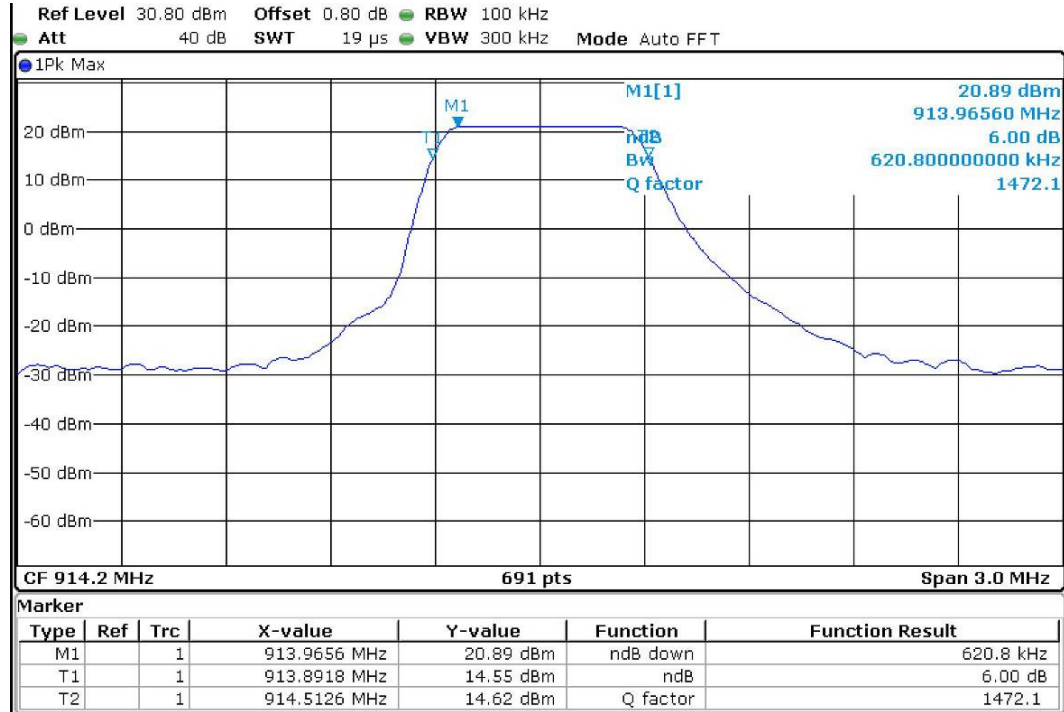



9.4 Conducted Band Edge Measurement

Inband Peak

Frequency (MHz)	Level (dBm)
903.090000	20.8
914.240000	20.8

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)	Result
902.000000	-30.3	31.1	0.8	PASS
928.000000	-44.5	45.3	0.8	PASS


Remark: Limit = Inband peak – 30dB

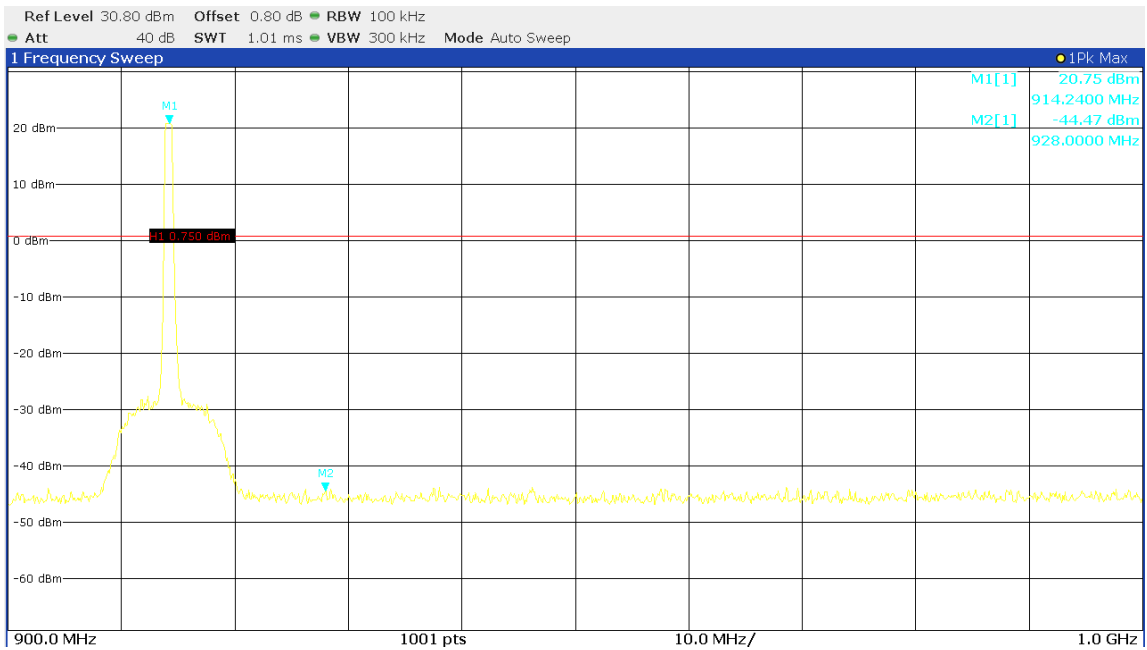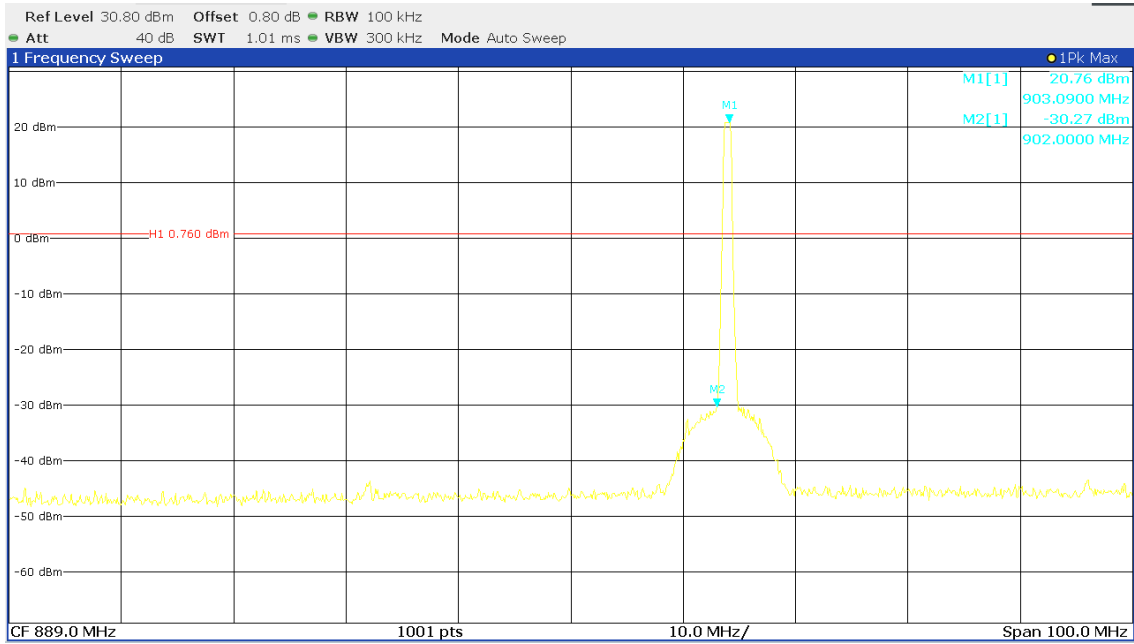




9.5 Conducted spurious emission

Lowest Channel

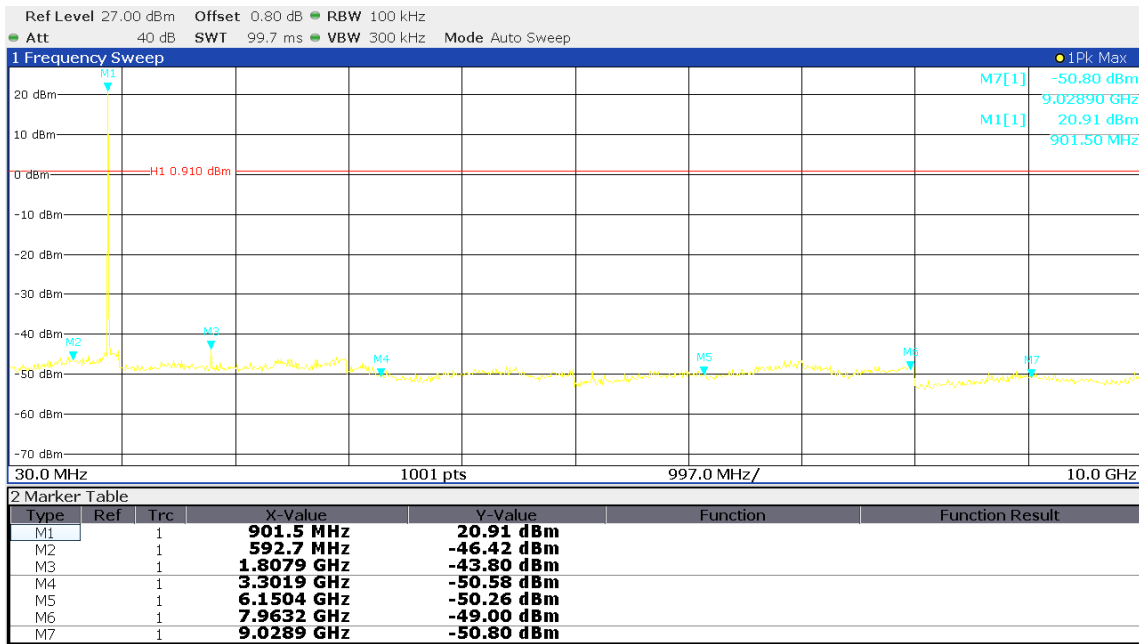


Middle Channel

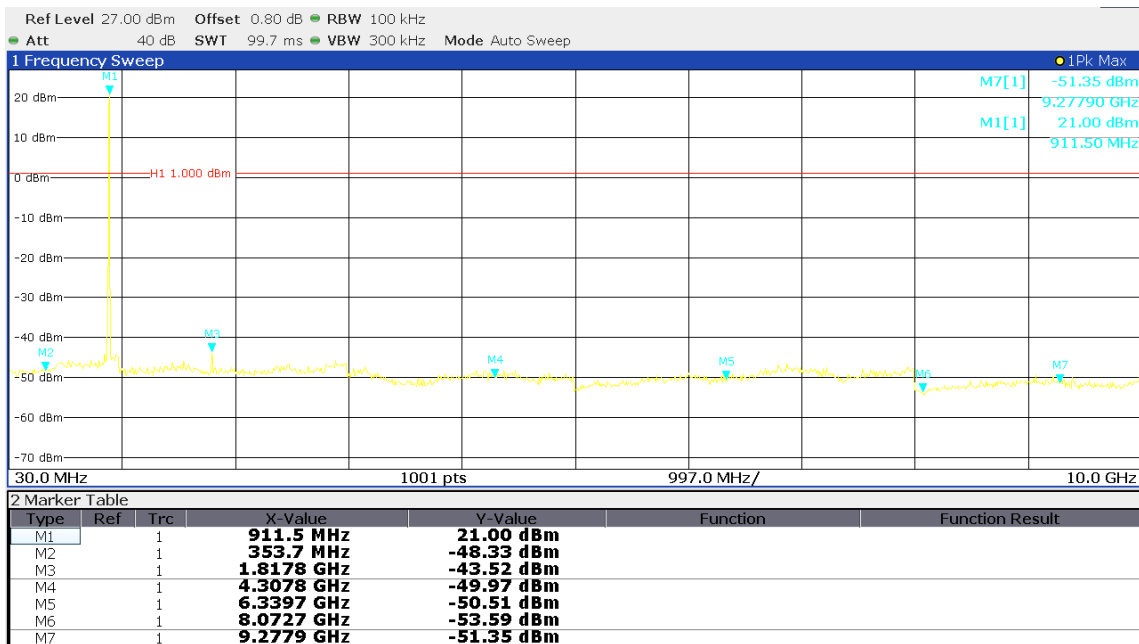



Highest Channel

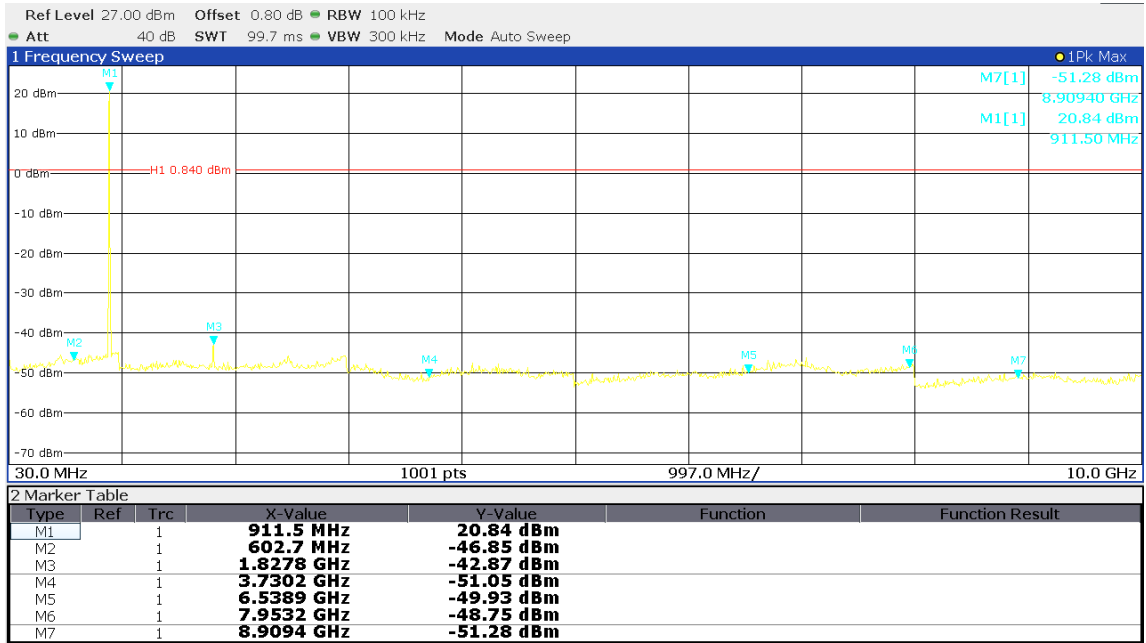

- End of the Report -