

Occupied Channel Bandwidth 99% (5745 MHz; 12,000 dBm; 20 MHz)


Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5745.000000	16.600000	---	---	5736.600000	5753.200000

(continuation of the "99 % Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Result
5745.000000	PASS

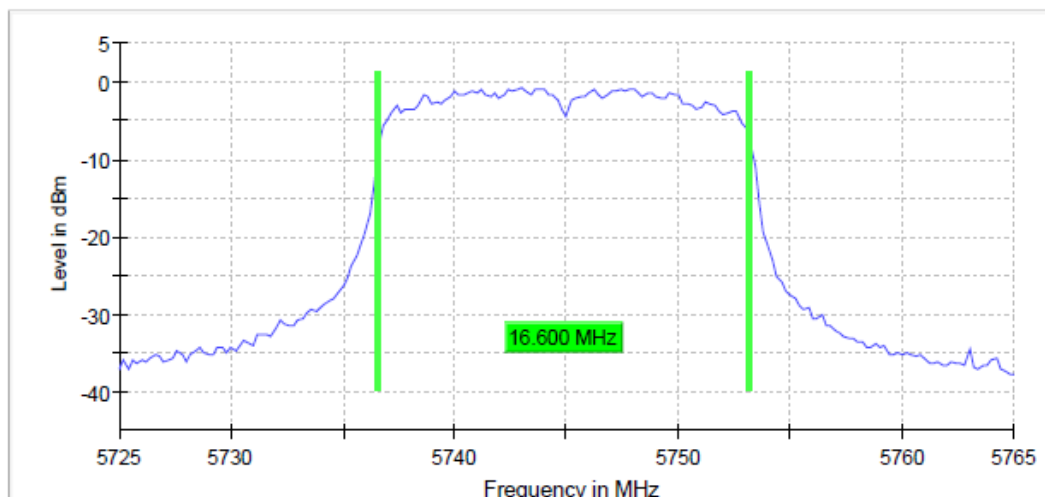

Occupied Channel Bandwidth 99% (5785 MHz; 12,000 dBm; 20 MHz)


Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5785.000000	16.400000	---	---	5776.800000	5793.200000

(continuation of the "99 % Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Result
5785.000000	PASS

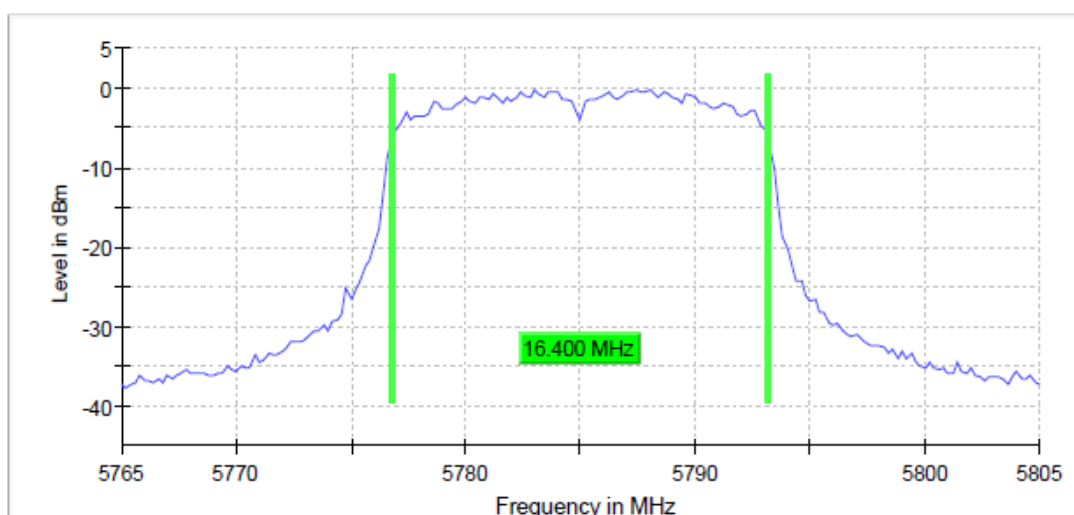

Occupied Channel Bandwidth 99% (5825 MHz; 12,000 dBm; 20 MHz)


Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5825.000000	16.400000	---	---	5816.800000	5833.200000

(continuation of the "99 % Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Result
5825.000000	PASS

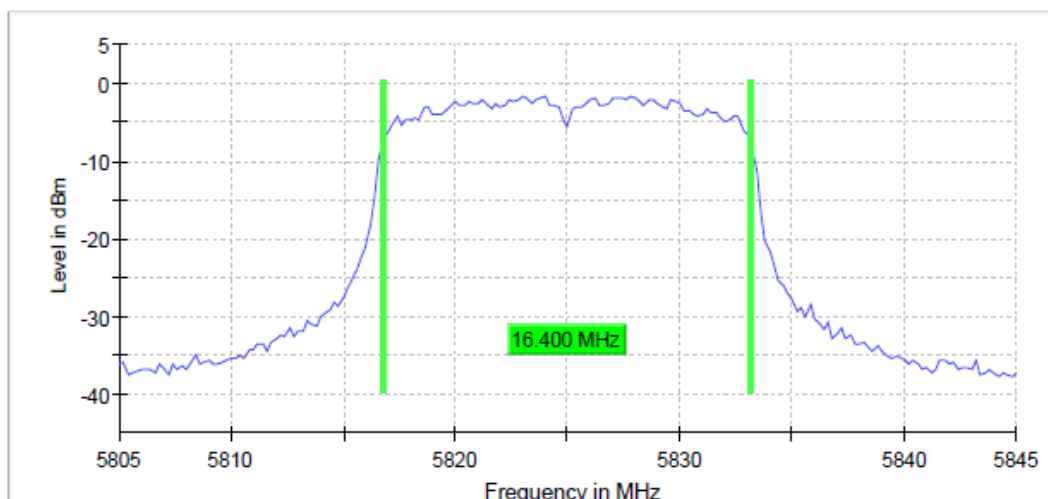

n-mode

Occupied Channel Bandwidth 99% (5180 MHz; 12,000 dBm; 20 MHz)


Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5180.000000	18.000000	---	---	5171.000000	5189.000000

(continuation of the "99 % Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Result
5180.000000	PASS

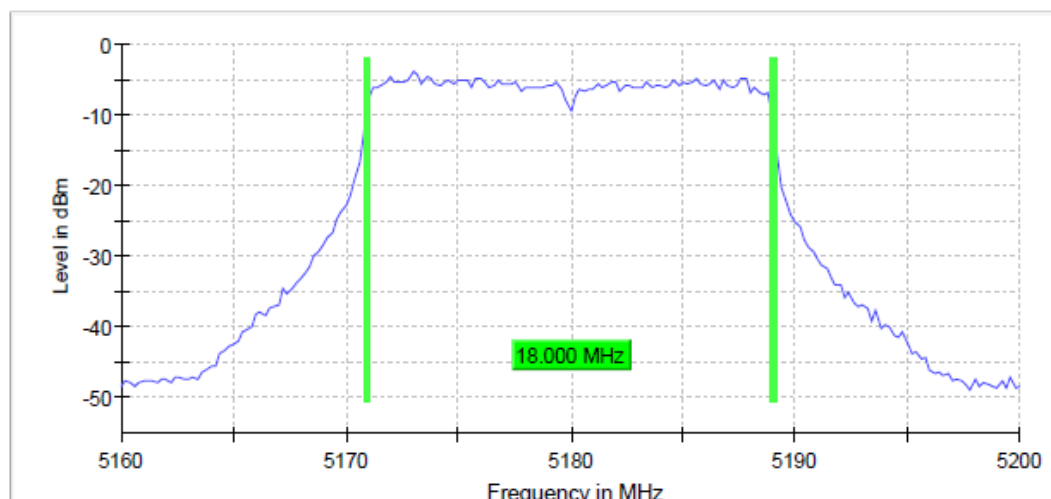

Occupied Channel Bandwidth 99% (5200 MHz; 12,000 dBm; 20 MHz)


Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5200.000000	18.000000	---	---	5191.000000	5209.000000

(continuation of the "99 % Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Result
5200.000000	PASS

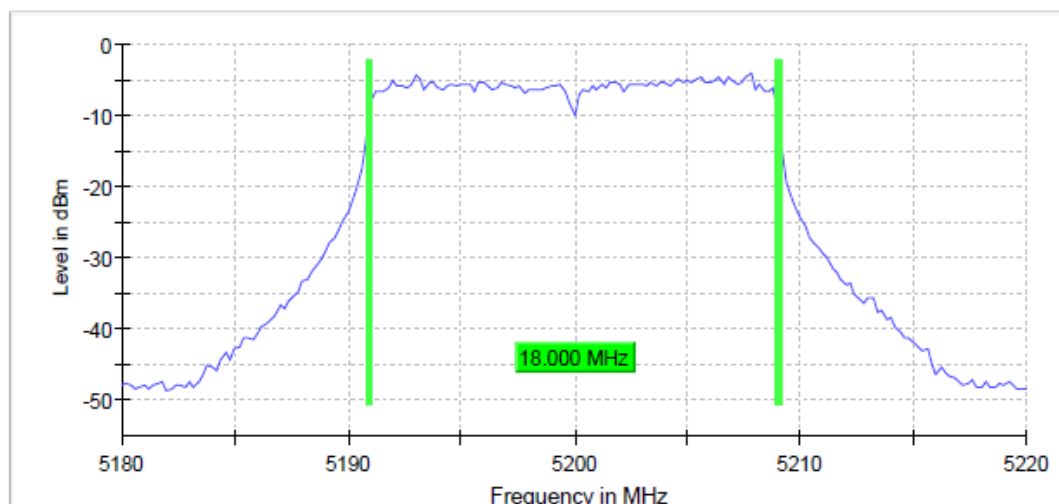

Occupied Channel Bandwidth 99% (5240 MHz; 12,000 dBm; 20 MHz)


Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5240.000000	18.000000	---	---	5231.000000	5249.000000

(continuation of the "99 % Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Result
5240.000000	PASS

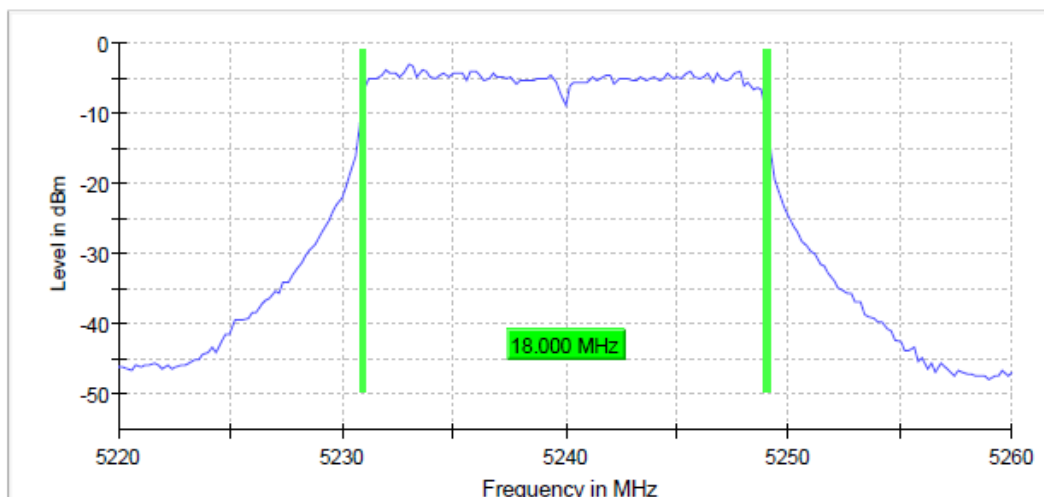

Occupied Channel Bandwidth 99% (5260 MHz; 12,000 dBm; 20 MHz)


Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5260.000000	18.000000	---	---	5251.000000	5269.000000

(continuation of the "99 % Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Result
5260.000000	PASS

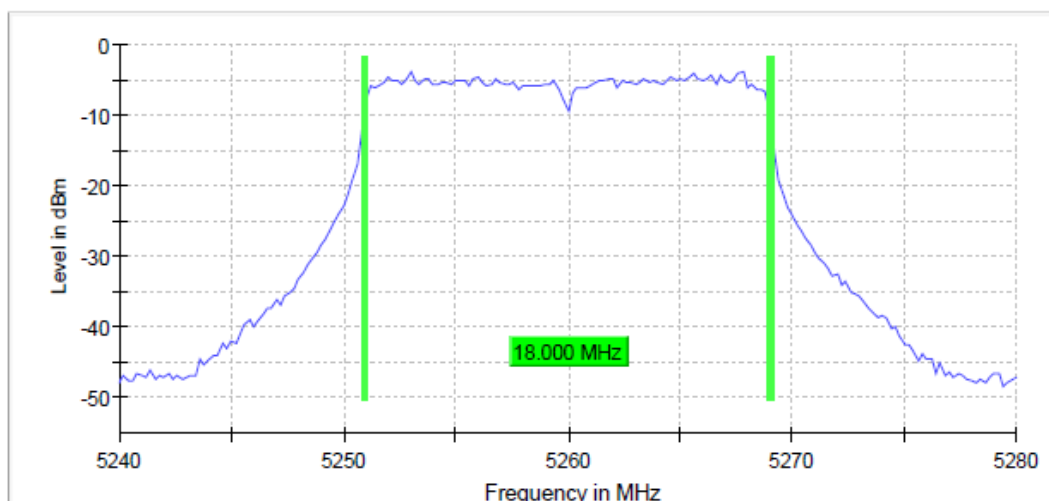

Occupied Channel Bandwidth 99% (5280 MHz; 12,000 dBm; 20 MHz)


Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5280.000000	18.000000	---	---	5271.000000	5289.000000

(continuation of the "99 % Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Result
5280.000000	PASS

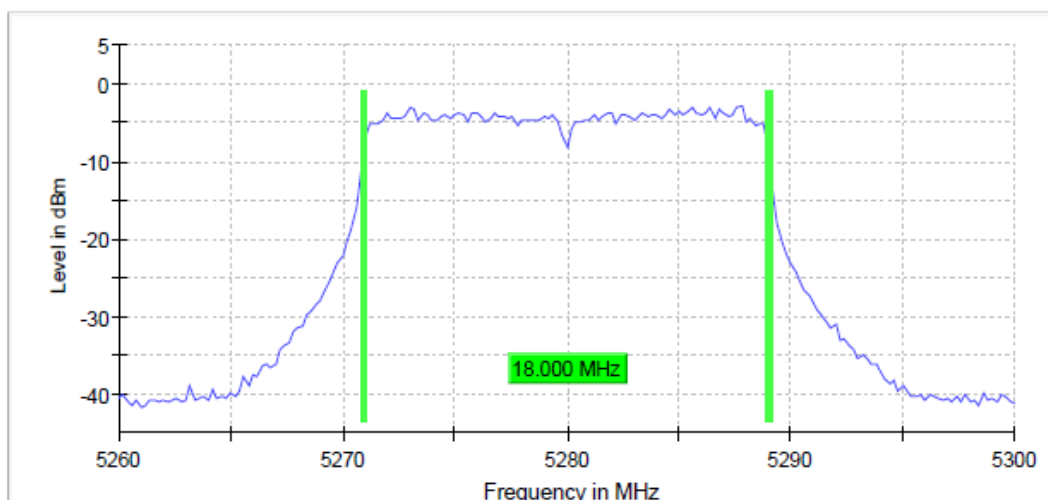

Occupied Channel Bandwidth 99% (5320 MHz; 12,000 dBm; 20 MHz)


Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5320.000000	18.000000	---	---	5311.000000	5329.000000

(continuation of the "99 % Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Result
5320.000000	PASS

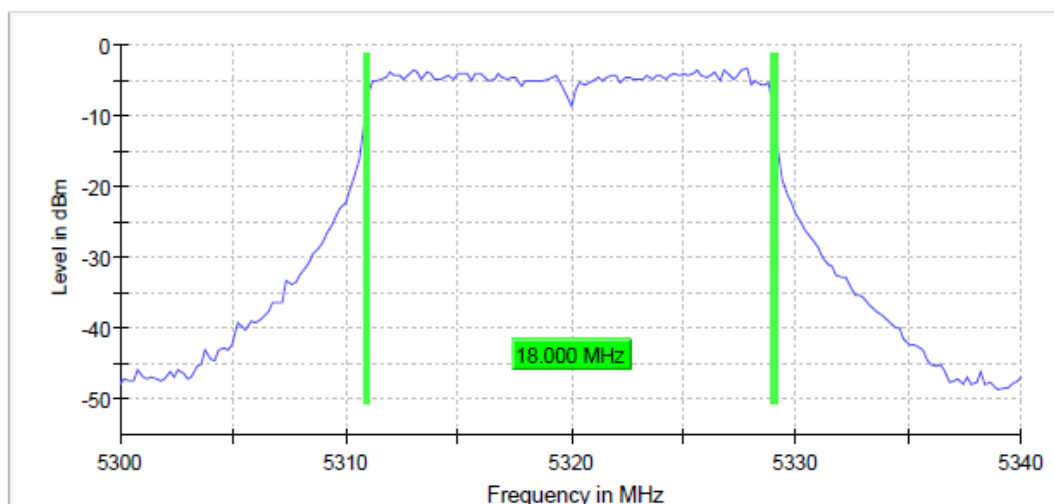

Occupied Channel Bandwidth 99% (5500 MHz; 12,000 dBm; 20 MHz)


Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5500.000000	18.000000	---	---	5491.000000	5509.000000

(continuation of the "99 % Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Result
5500.000000	PASS

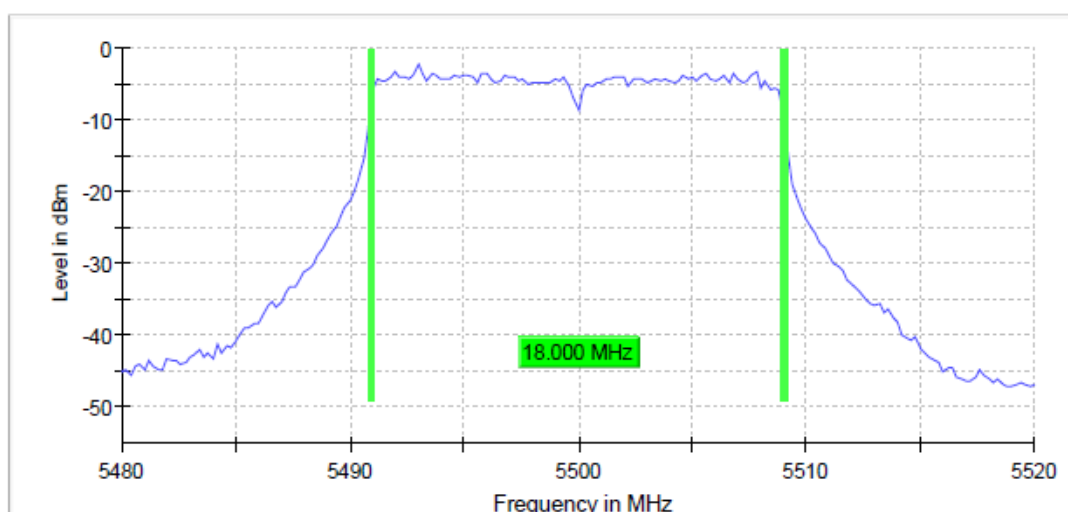

Occupied Channel Bandwidth 99% (5540 MHz; 12,000 dBm; 20 MHz)


Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5540.000000	18.000000	---	---	5531.000000	5549.000000

(continuation of the "99 % Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Result
5540.000000	PASS

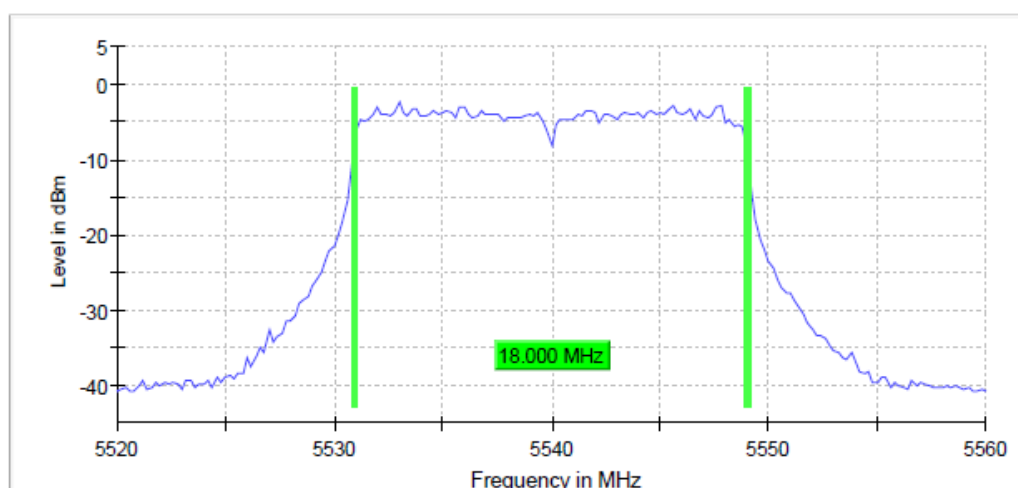

Occupied Channel Bandwidth 99% (5580 MHz; 12,000 dBm; 20 MHz)


Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5580.000000	18.000000	---	---	5571.000000	5589.000000

(continuation of the "99 % Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Result
5580.000000	PASS

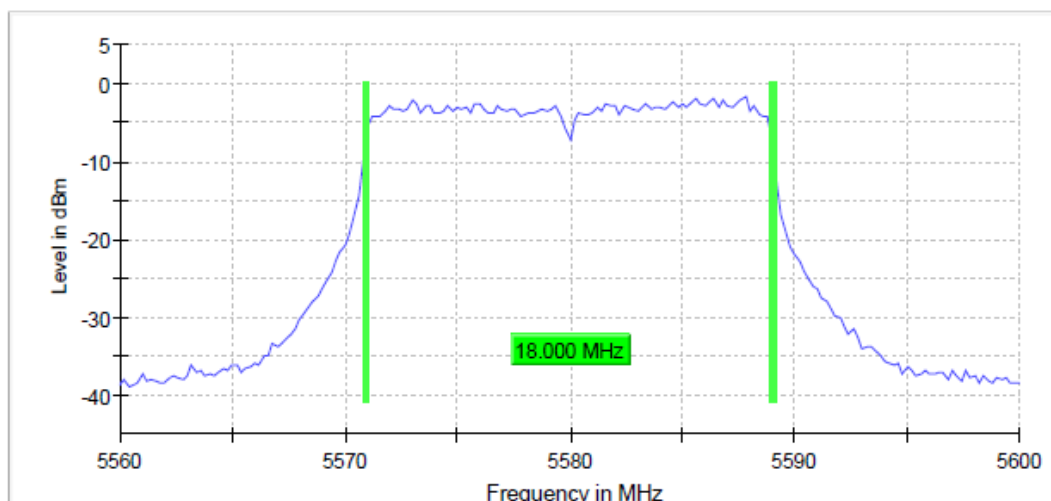

Occupied Channel Bandwidth 99% (5660 MHz; 12,000 dBm; 20 MHz)


Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5660.000000	18.000000	---	---	5651.000000	5669.000000

(continuation of the "99 % Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Result
5660.000000	PASS

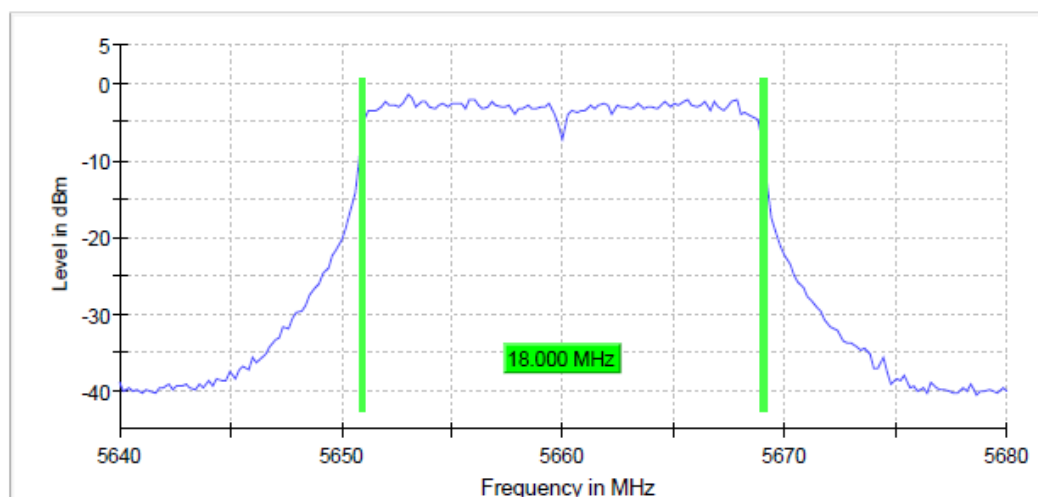

Occupied Channel Bandwidth 99% (5680 MHz; 12,000 dBm; 20 MHz)


Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5680.000000	18.200000	---	---	5670.800000	5689.000000

(continuation of the "99 % Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Result
5680.000000	PASS

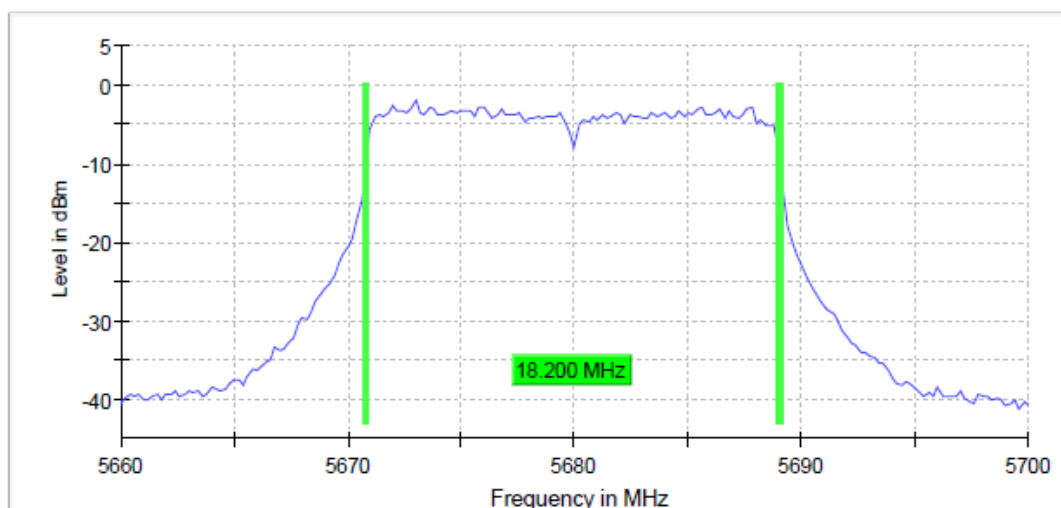

Occupied Channel Bandwidth 99% (5700 MHz; 12,000 dBm; 20 MHz)


Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5700.000000	18.000000	---	---	5691.000000	5709.000000

(continuation of the "99 % Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Result
5700.000000	PASS

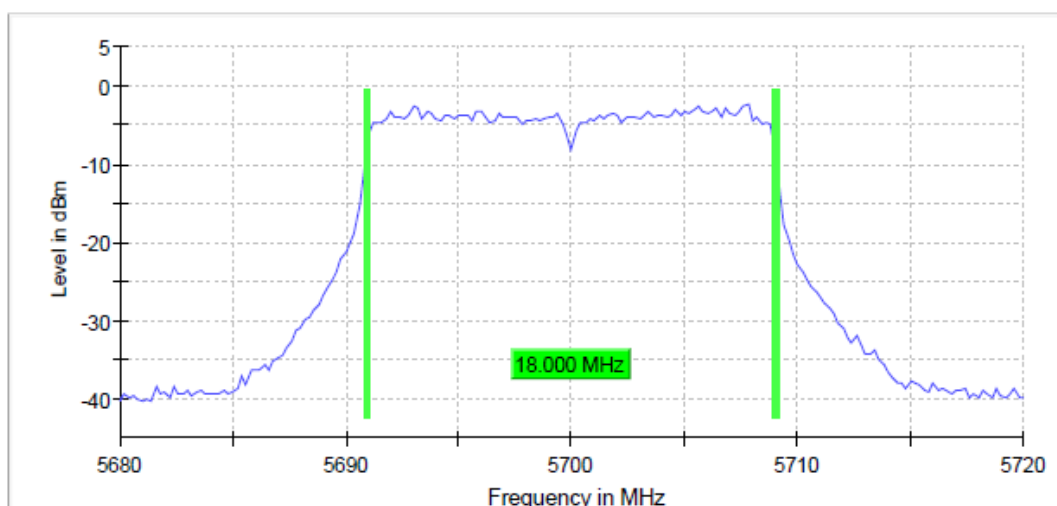

Occupied Channel Bandwidth 99% (5745 MHz; 12,000 dBm; 20 MHz)


Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures
New Rules v01r03 and ANSI C63.10

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5745.000000	18.200000	---	---	5735.800000	5754.000000

(continuation of the "99 % Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Result
5745.000000	PASS

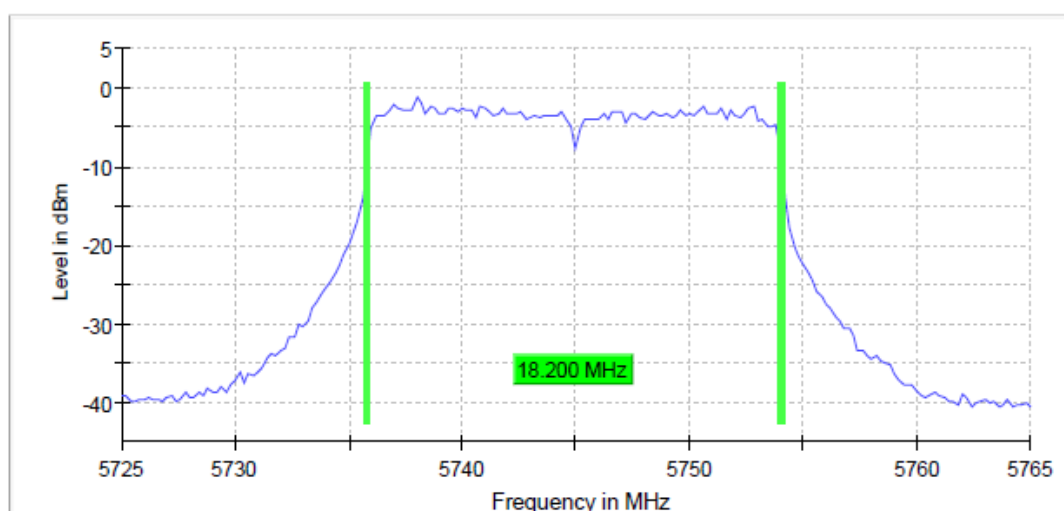

Occupied Channel Bandwidth 99% (5785 MHz; 12,000 dBm; 20 MHz)


Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5785.000000	18.000000	---	---	5776.000000	5794.000000

(continuation of the "99 % Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Result
5785.000000	PASS

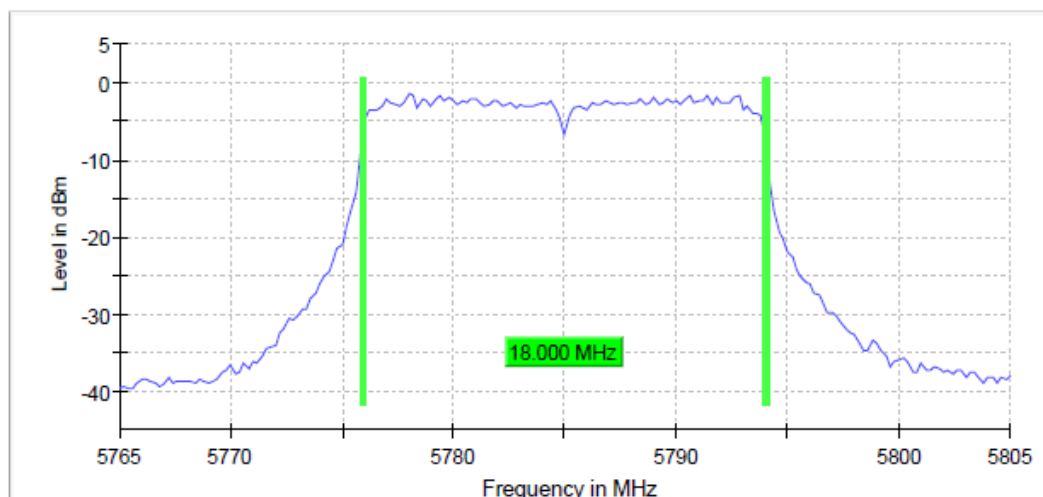

Occupied Channel Bandwidth 99% (5825 MHz; 12,000 dBm; 20 MHz)


Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5825.000000	18.000000	---	---	5816.000000	5834.000000

(continuation of the "99 % Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Result
5825.000000	PASS

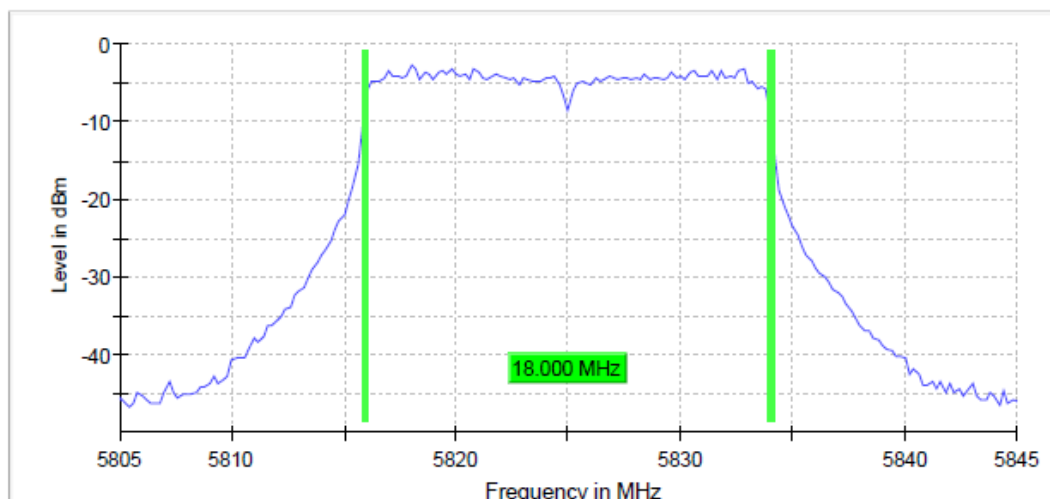

ac-mode

Occupied Channel Bandwidth 99% (5180 MHz; 12,000 dBm; 20 MHz)


Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5180.000000	18.000000	---	---	5171.000000	5189.000000

(continuation of the "99 % Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Result
5180.000000	PASS

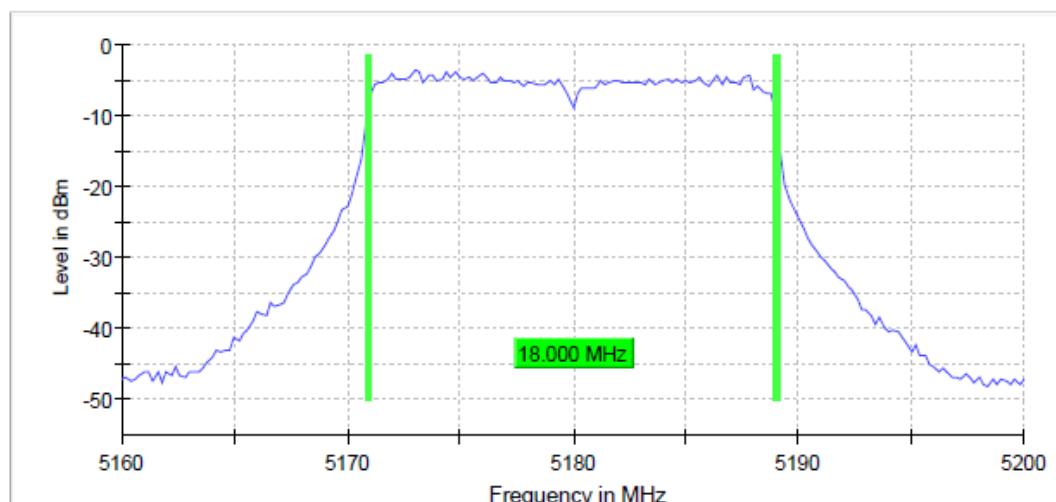

Occupied Channel Bandwidth 99% (5200 MHz; 12,000 dBm; 20 MHz)


Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5200.000000	18.000000	---	---	5191.000000	5209.000000

(continuation of the "99 % Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Result
5200.000000	PASS

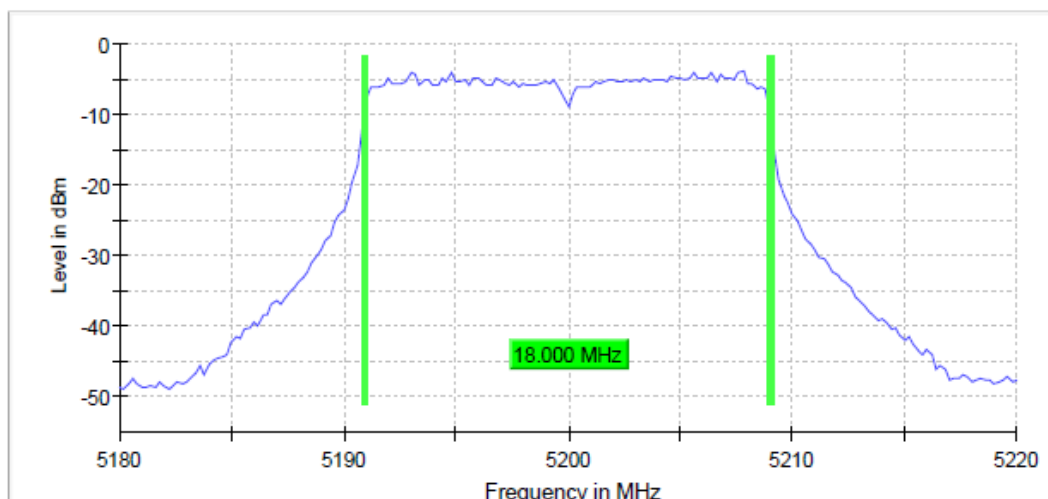

Occupied Channel Bandwidth 99% (5240 MHz; 12,000 dBm; 20 MHz)


Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5240.000000	18.000000	---	---	5231.000000	5249.000000

(continuation of the "99 % Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Result
5240.000000	PASS

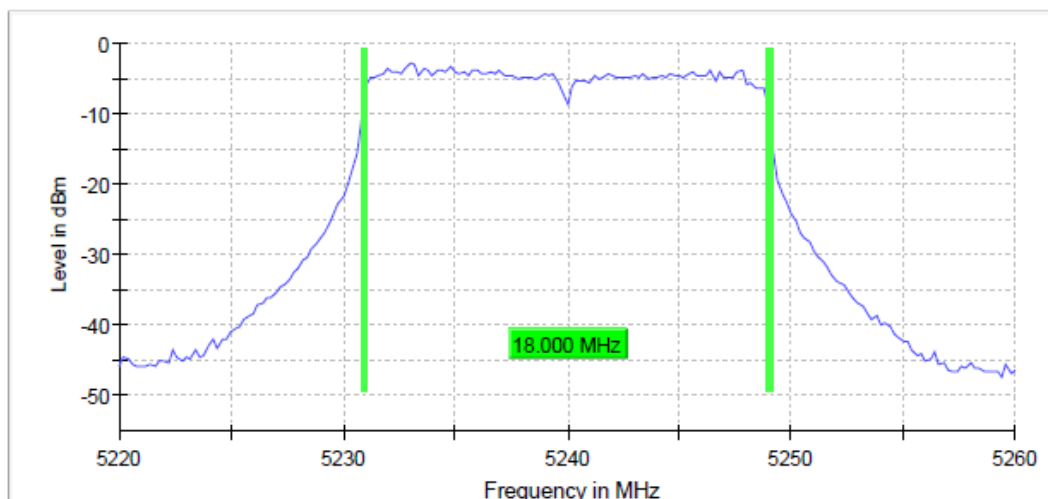

Occupied Channel Bandwidth 99% (5260 MHz; 12,000 dBm; 20 MHz)


Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5260.000000	18.000000	---	---	5251.000000	5269.000000

(continuation of the "99 % Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Result
5260.000000	PASS

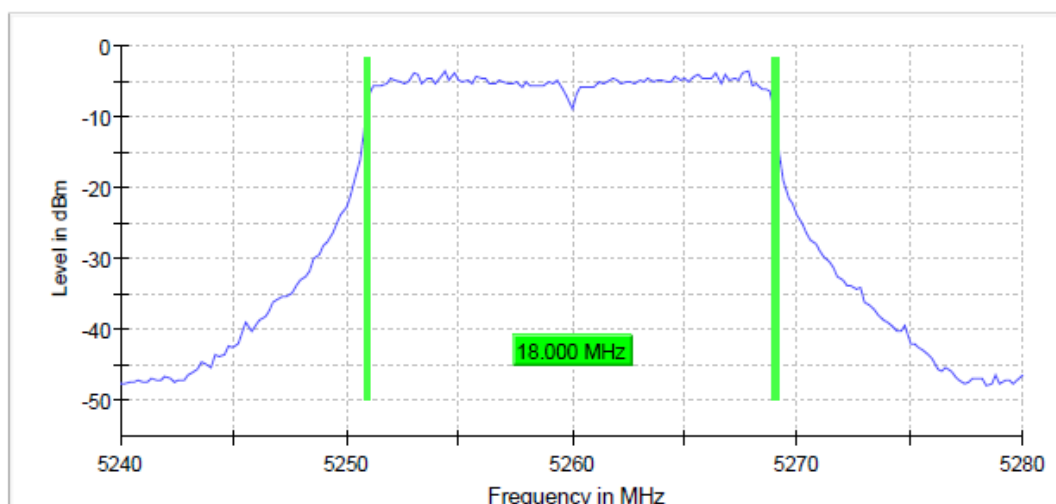

Occupied Channel Bandwidth 99% (5280 MHz; 12,000 dBm; 20 MHz)


Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5280.000000	18.000000	---	---	5271.000000	5289.000000

(continuation of the "99 % Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Result
5280.000000	PASS

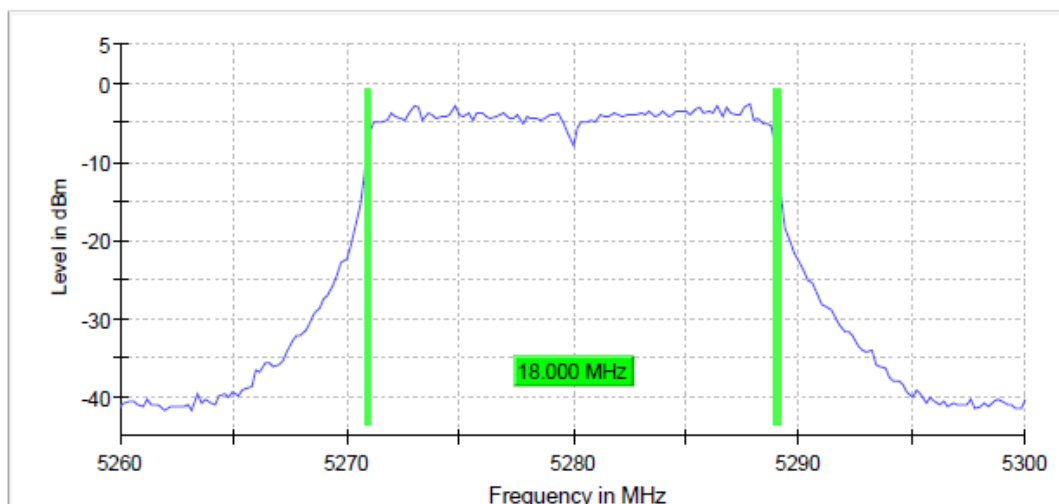

Occupied Channel Bandwidth 99% (5320 MHz; 12,000 dBm; 20 MHz)


Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5320.000000	18.000000	---	---	5311.000000	5329.000000

(continuation of the "99 % Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Result
5320.000000	PASS

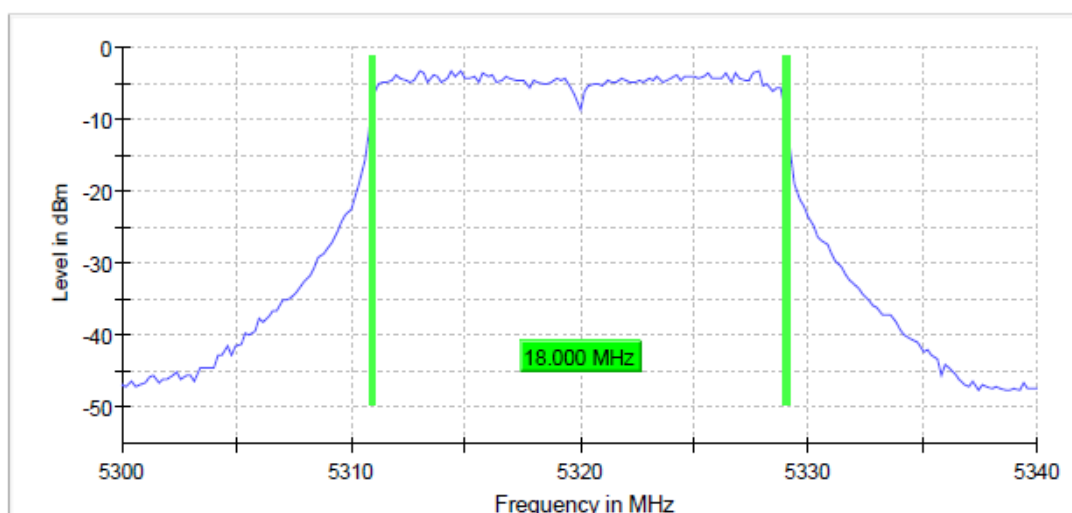

Occupied Channel Bandwidth 99% (5500 MHz; 12,000 dBm; 20 MHz)


Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5500.000000	18.200000	---	---	5490.800000	5509.000000

(continuation of the "99 % Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Result
5500.000000	PASS

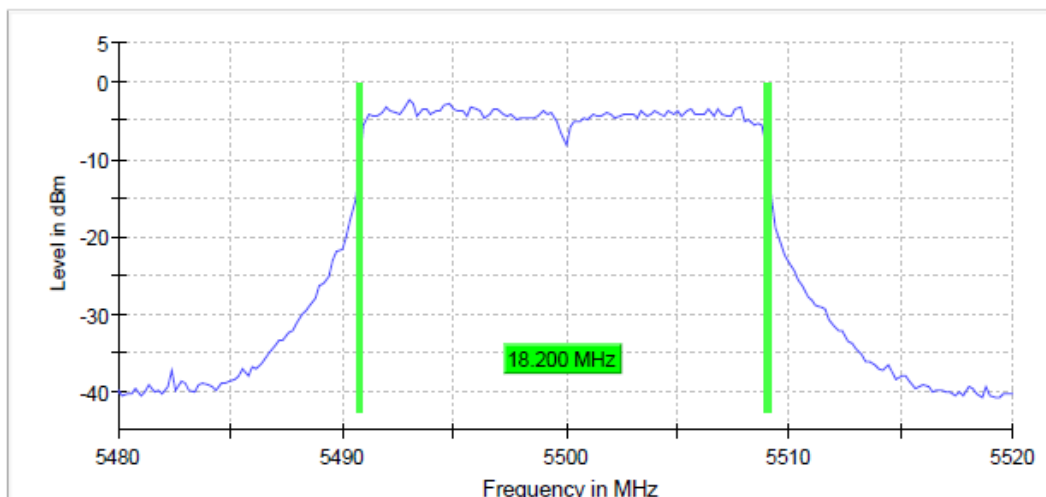

Occupied Channel Bandwidth 99% (5540 MHz; 12,000 dBm; 20 MHz)


Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5540.000000	18.000000	---	---	5531.000000	5549.000000

(continuation of the "99 % Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Result
5540.000000	PASS

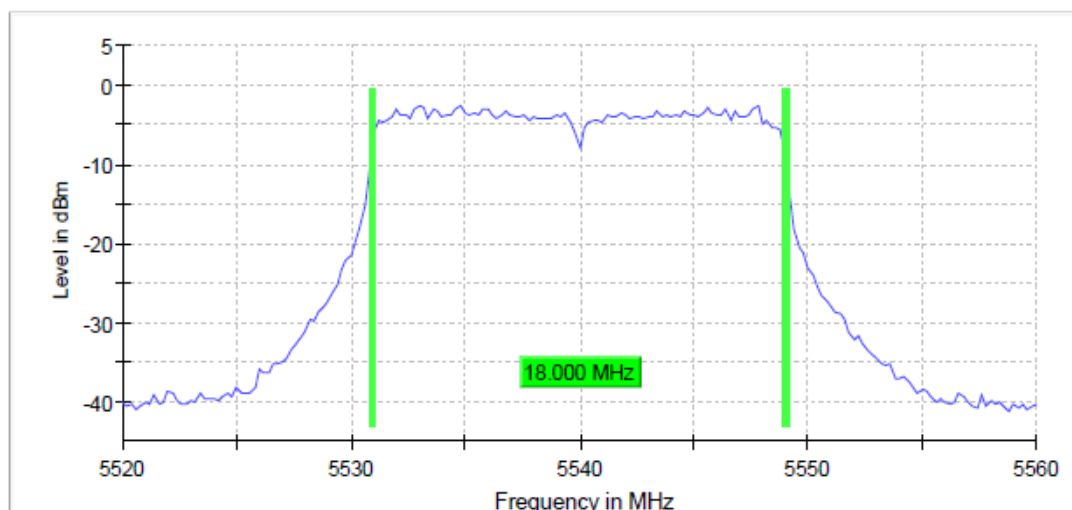

Occupied Channel Bandwidth 99% (5580 MHz; 12,000 dBm; 20 MHz)


Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5580.000000	18.000000	---	---	5571.000000	5589.000000

(continuation of the "99 % Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Result
5580.000000	PASS

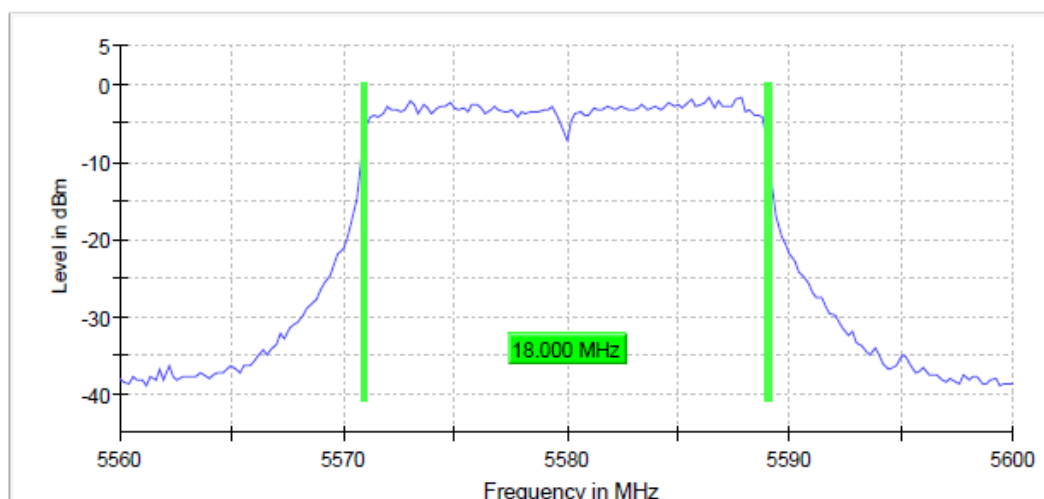

Occupied Channel Bandwidth 99% (5660 MHz; 12,000 dBm; 20 MHz)


Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5660.000000	18.000000	---	---	5651.000000	5669.000000

(continuation of the "99 % Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Result
5660.000000	PASS

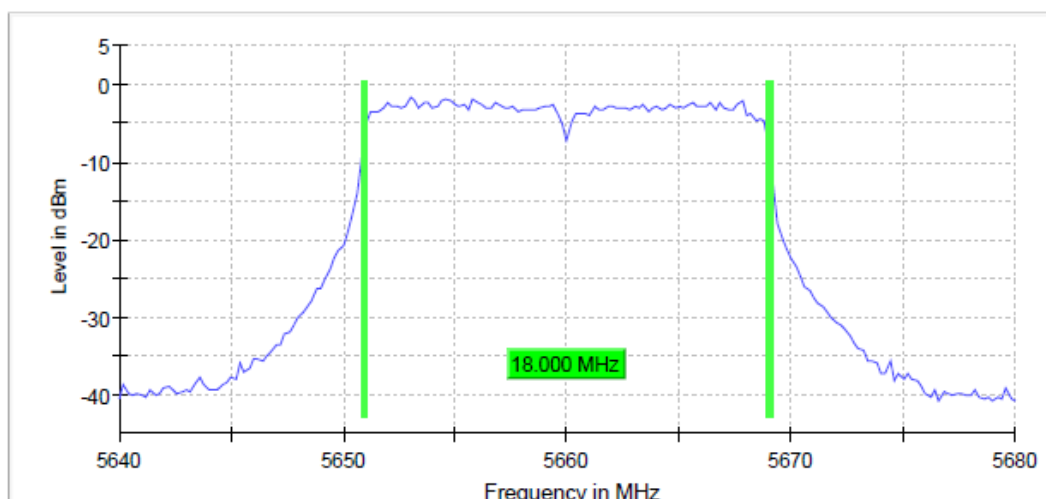

Occupied Channel Bandwidth 99% (5680 MHz; 12,000 dBm; 20 MHz)


Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5680.000000	18.200000	---	---	5670.800000	5689.000000

(continuation of the "99 % Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Result
5680.000000	PASS

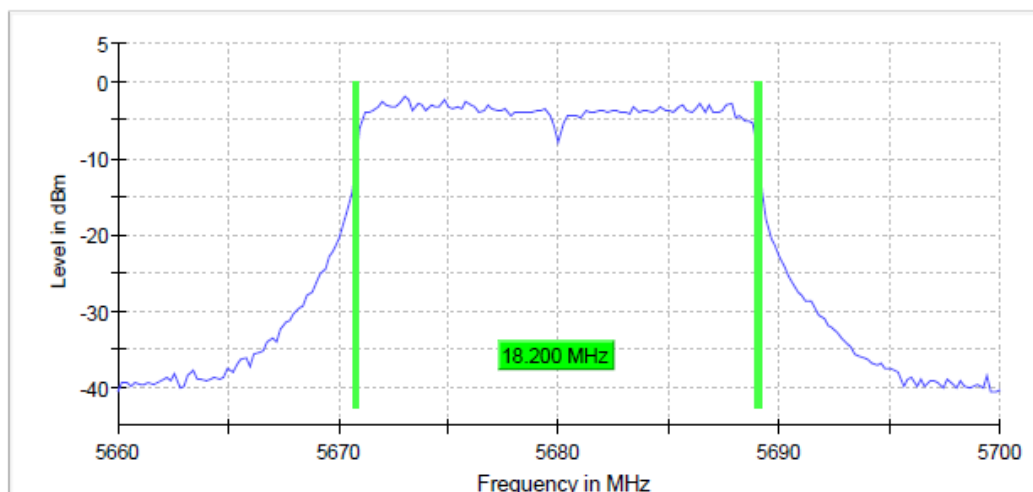

Occupied Channel Bandwidth 99% (5700 MHz; 12,000 dBm; 20 MHz)


Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5700.000000	18.000000	---	---	5691.000000	5709.000000

(continuation of the "99 % Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Result
5700.000000	PASS

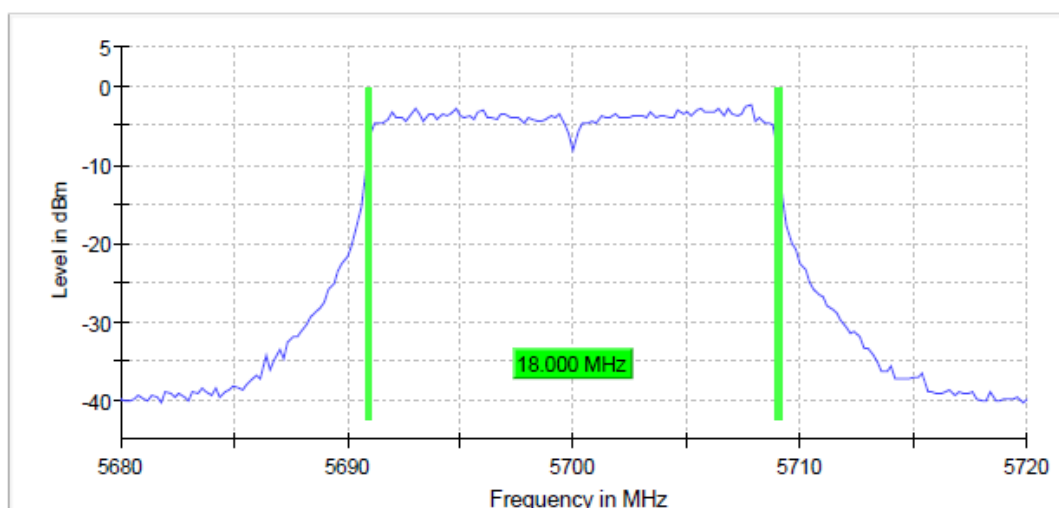

Occupied Channel Bandwidth 99% (5745 MHz; 12,000 dBm; 20 MHz)


Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5745.000000	18.200000	---	---	5735.800000	5754.000000

(continuation of the "99 % Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Result
5745.000000	PASS

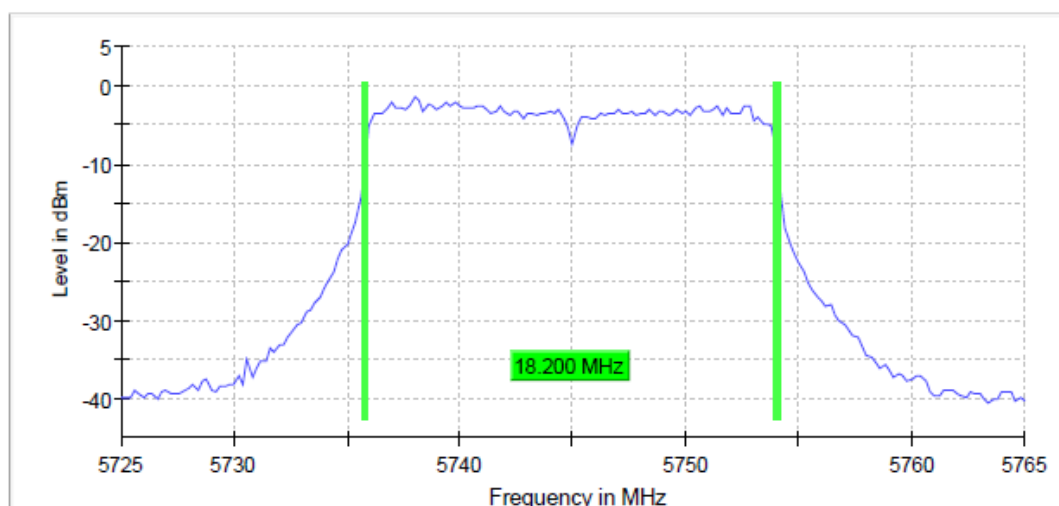

Occupied Channel Bandwidth 99% (5785 MHz; 12,000 dBm; 20 MHz)


Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5785.000000	18.000000	---	---	5776.000000	5794.000000

(continuation of the "99 % Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Result
5785.000000	PASS

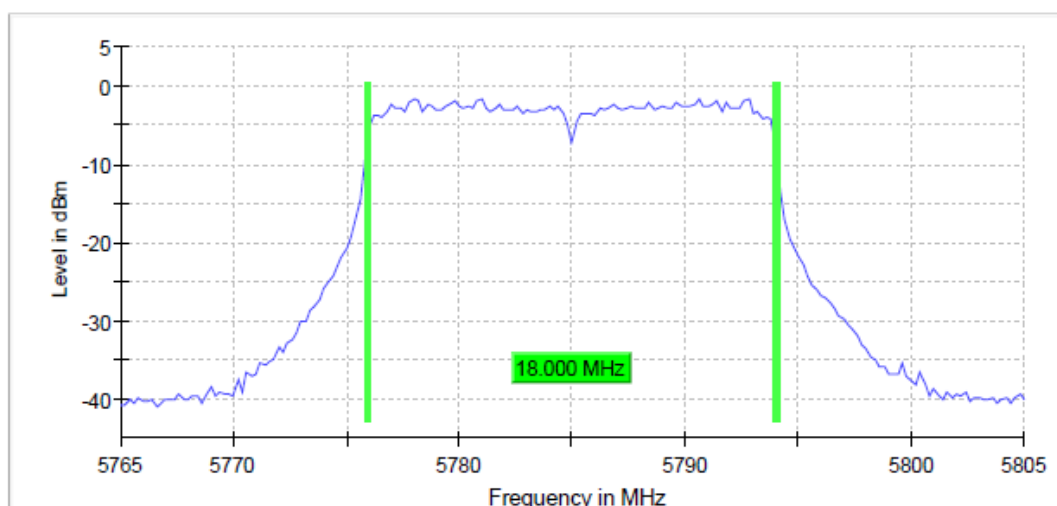

Occupied Channel Bandwidth 99% (5825 MHz; 12,000 dBm; 20 MHz)


Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5825.000000	18.000000	---	---	5816.000000	5834.000000

(continuation of the "99 % Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Result
5825.000000	PASS

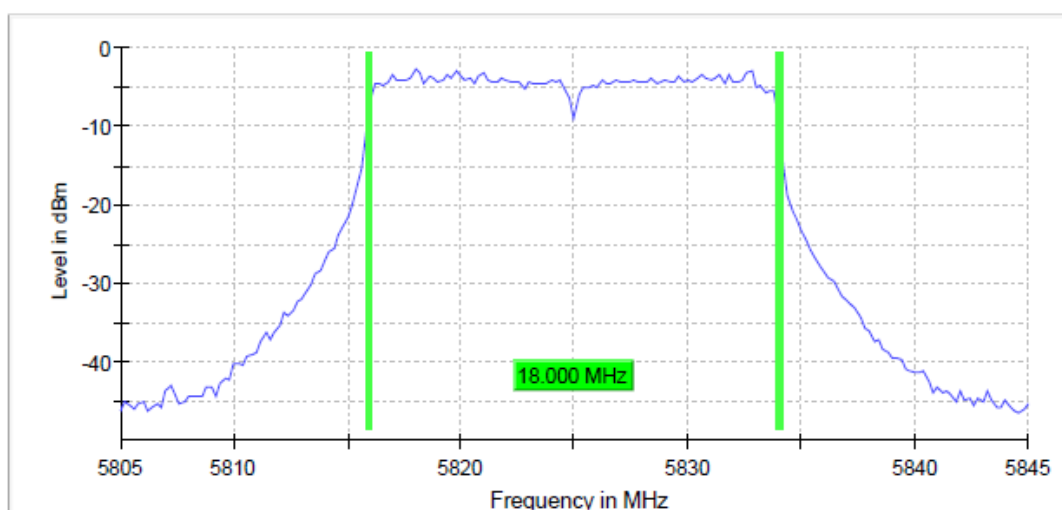

2.4.2. 40MHz Bandwidth

n-mode

Occupied Channel Bandwidth 99% (5190 MHz; 12,000 dBm; 40 MHz)


Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5190.000000	36.800000	---	---	5171.600000	5208.400000

(continuation of the "99 % Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Result
5190.000000	PASS

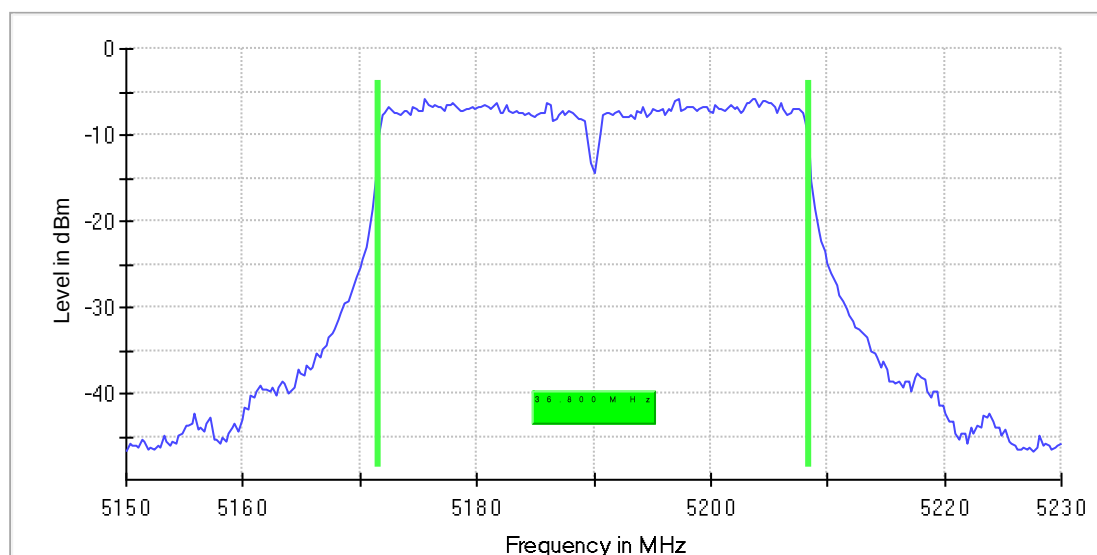

Occupied Channel Bandwidth 99% (5230 MHz; 12,000 dBm; 40 MHz)


Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5230.000000	36.800000	---	---	5211.600000	5248.400000

(continuation of the "99 % Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Result
5230.000000	PASS

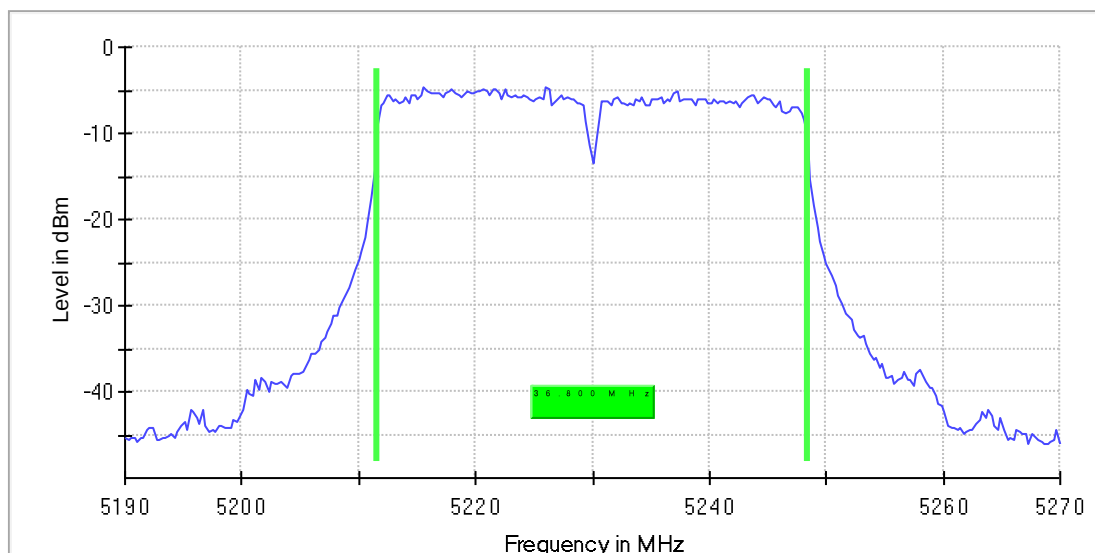

Occupied Channel Bandwidth 99% (5270 MHz; 12,000 dBm; 40 MHz)


Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5270.000000	36.800000	---	---	5251.600000	5288.400000

(continuation of the "99 % Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Result
5270.000000	PASS

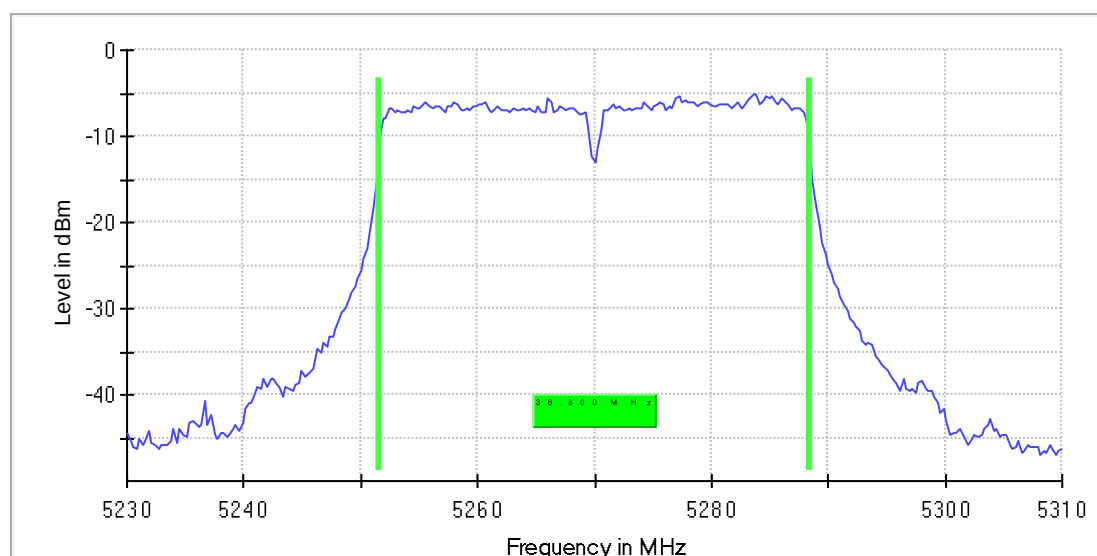

Occupied Channel Bandwidth 99% (5310 MHz; 12,000 dBm; 40 MHz)


Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5310.000000	36.800000	---	---	5291.600000	5328.400000

(continuation of the "99 % Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Result
5310.000000	PASS

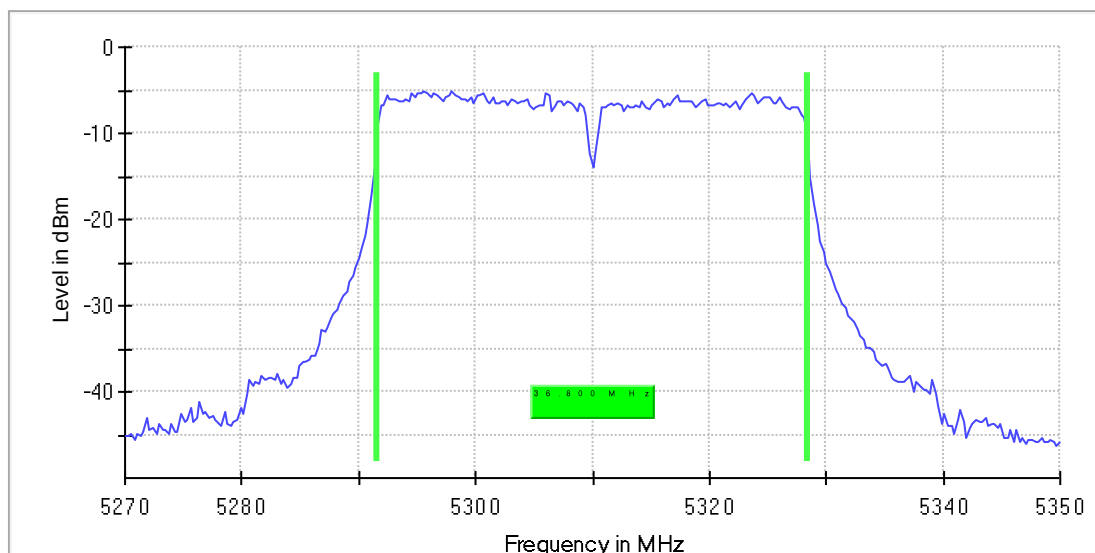

Occupied Channel Bandwidth 99% (5510 MHz; 12,000 dBm; 40 MHz)


Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5510.000000	36.800000	---	---	5491.600000	5528.400000

(continuation of the "99 % Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Result
5510.000000	PASS

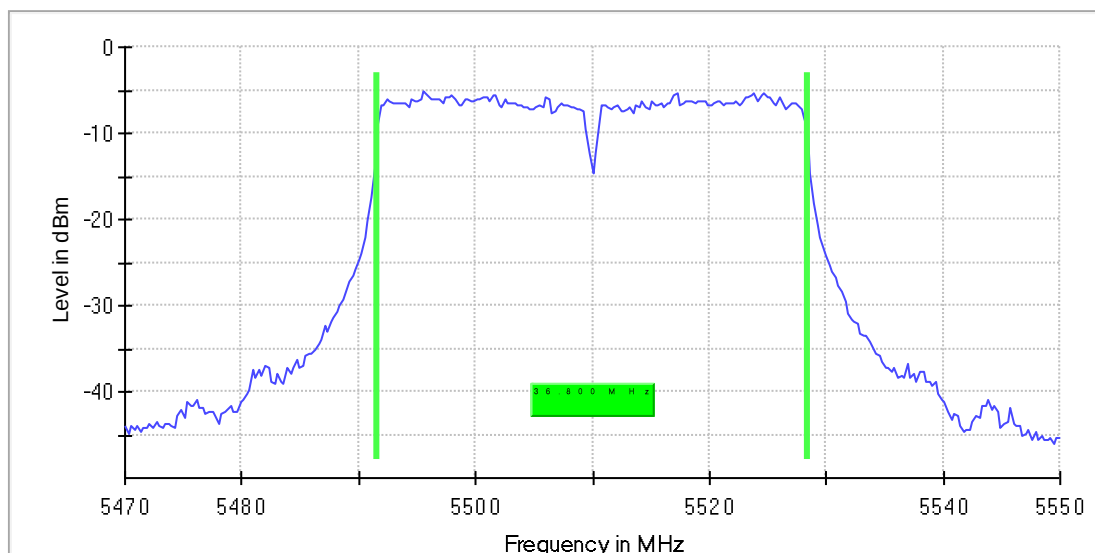

Occupied Channel Bandwidth 99% (5550 MHz; 12,000 dBm; 40 MHz)


Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5550.000000	36.800000	---	---	5531.600000	5568.400000

(continuation of the "99 % Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Result
5550.000000	PASS

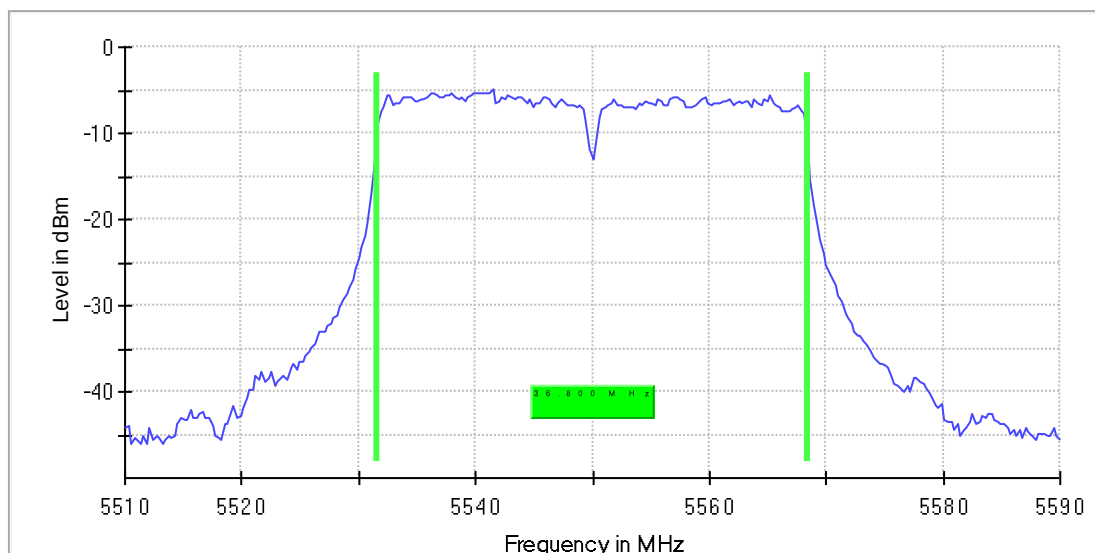

Occupied Channel Bandwidth 99% (5670 MHz; 12,000 dBm; 40 MHz)


Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5670.000000	36.533333	---	---	5651.600000	5688.133333

(continuation of the "99 % Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Result
5670.000000	PASS

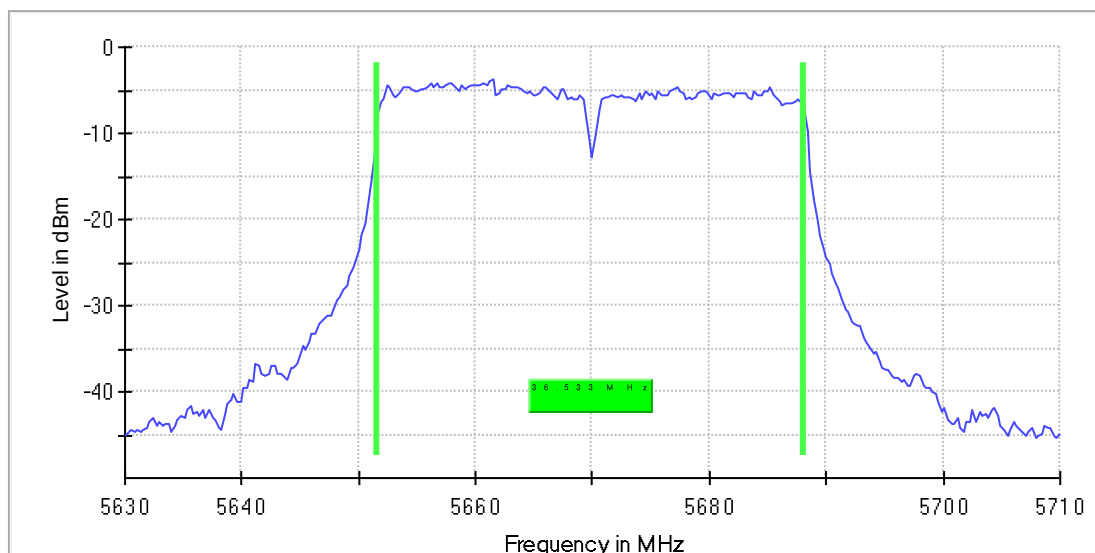

Occupied Channel Bandwidth 99% (5755 MHz; 12,000 dBm; 40 MHz)


Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5755.000000	36.800000	---	---	5736.600000	5773.400000

(continuation of the "99 % Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Result
5755.000000	PASS

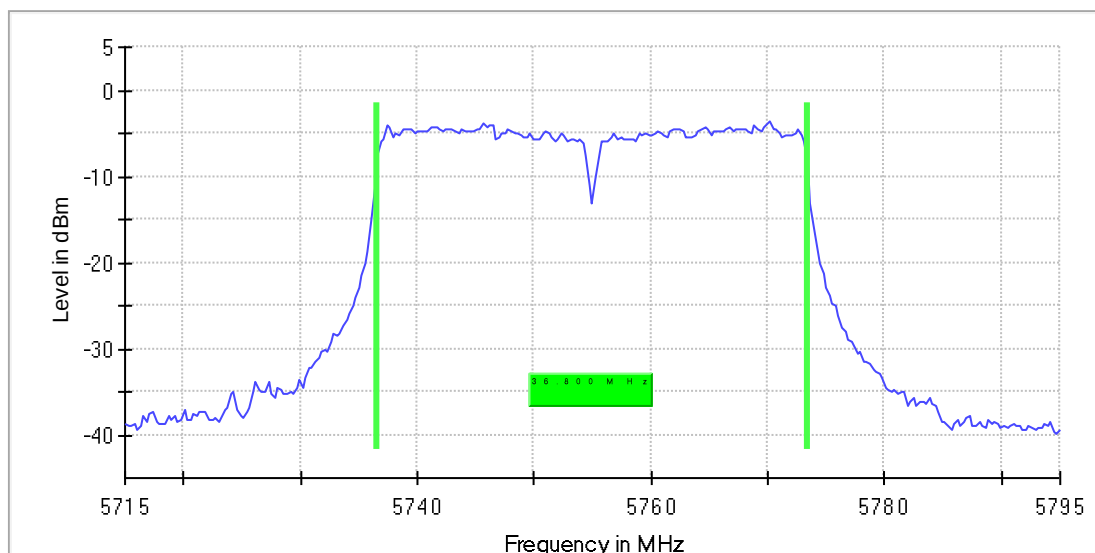

Occupied Channel Bandwidth 99 % (5795 MHz; 12,000 dBm; 40 MHz)


Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5795.000000	36.533333	---	---	5776.600000	5813.133333

(continuation of the "99 % Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Result
5795.000000	PASS

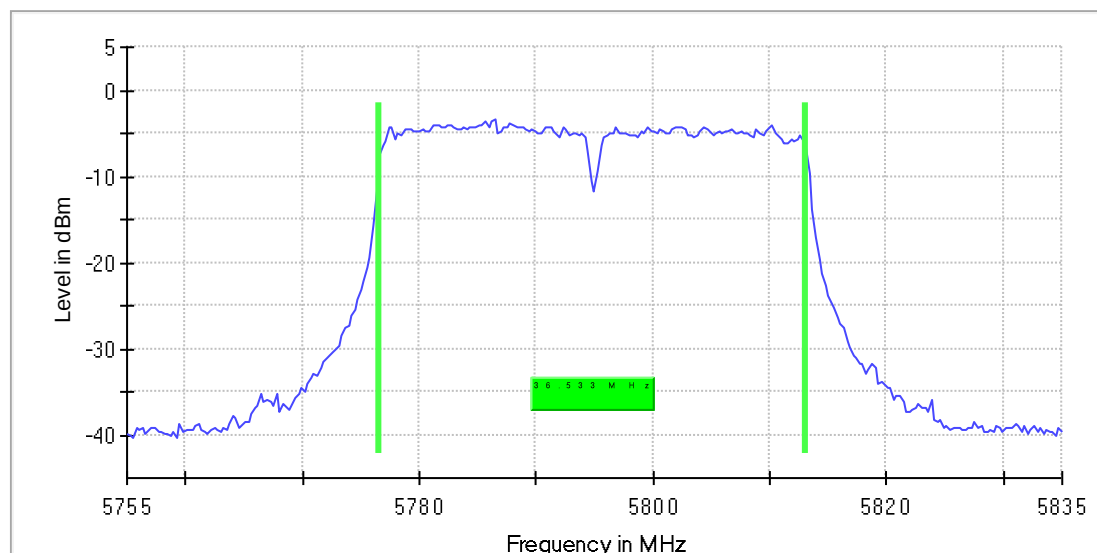

ac-mode

Occupied Channel Bandwidth 99 % (5190 MHz; 12,000 dBm; 40 MHz)


Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5190.000000	36.800000	---	---	5171.600000	5208.400000

(continuation of the "99 % Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Result
5190.000000	PASS

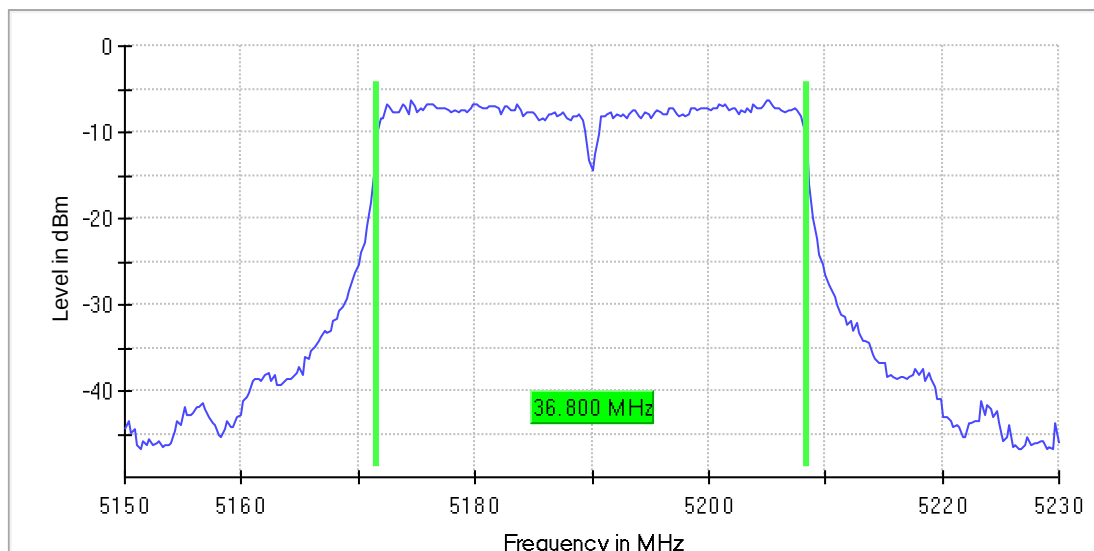

Occupied Channel Bandwidth 99 % (5230 MHz; 12,000 dBm; 40 MHz)


Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5230.000000	36.533333	---	---	5211.600000	5248.133333

(continuation of the "99 % Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Result
5230.000000	PASS

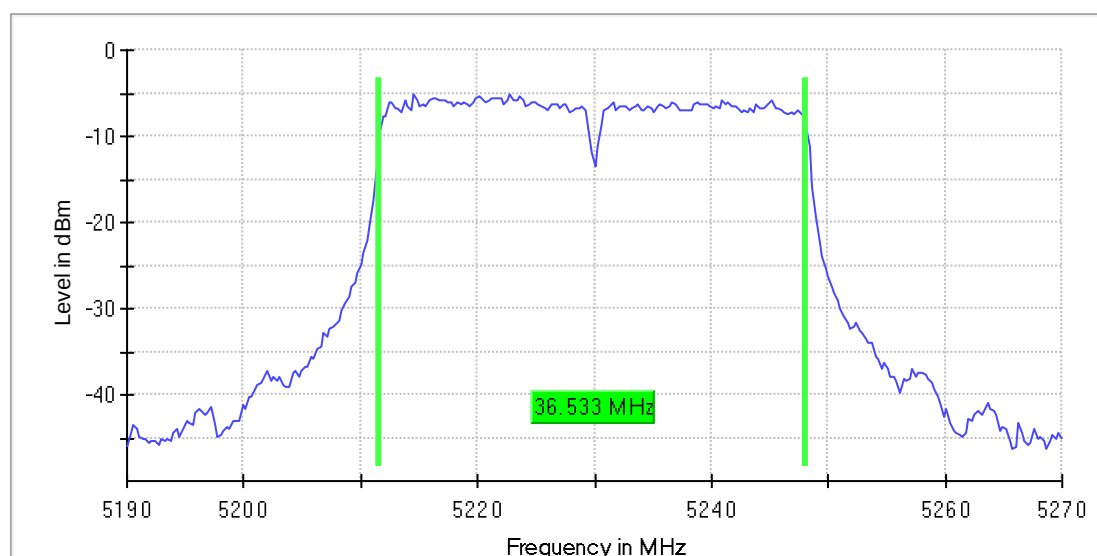

Occupied Channel Bandwidth 99% (5270 MHz; 12,000 dBm; 40 MHz)


Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5270.000000	36.800000	---	---	5251.600000	5288.400000

(continuation of the "99 % Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Result
5270.000000	PASS

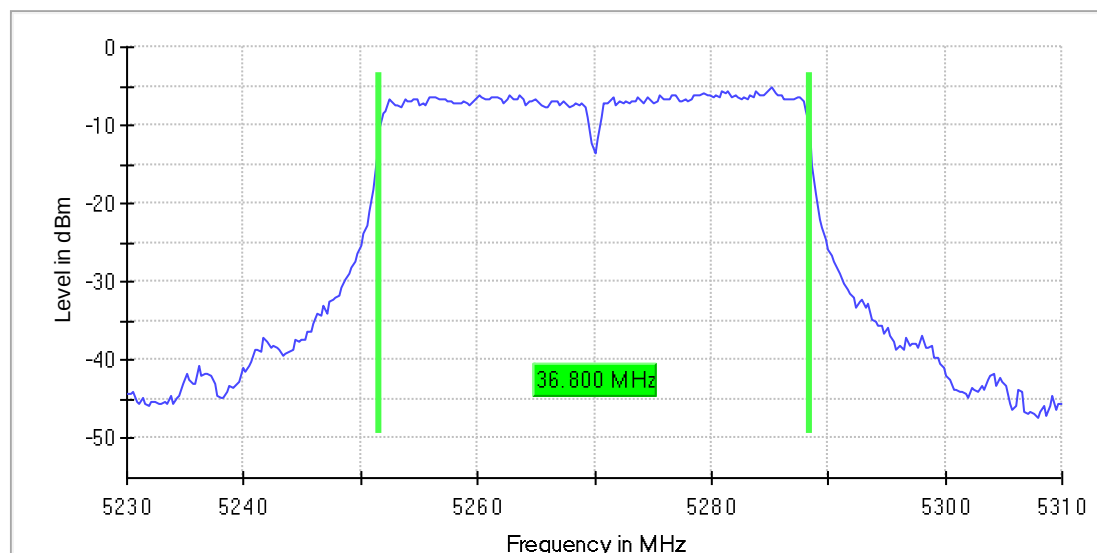

Occupied Channel Bandwidth 99% (5310 MHz; 12,000 dBm; 40 MHz)


Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5310.000000	36.800000	---	---	5291.600000	5328.400000

(continuation of the "99 % Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Result
5310.000000	PASS

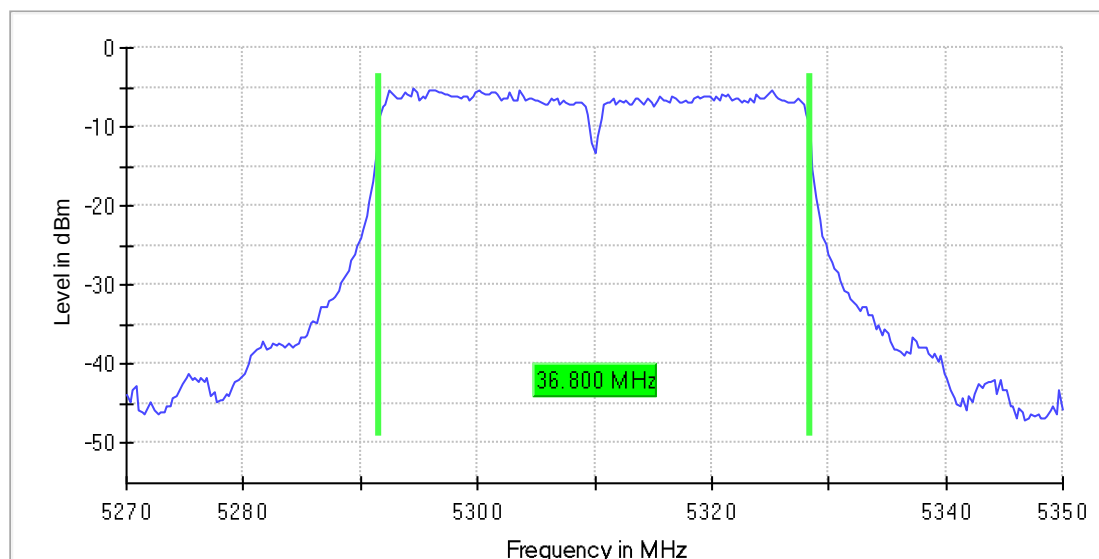

Occupied Channel Bandwidth 99% (5510 MHz; 12,000 dBm; 40 MHz)


Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5510.000000	36.800000	---	---	5491.600000	5528.400000

(continuation of the "99 % Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Result
5510.000000	PASS

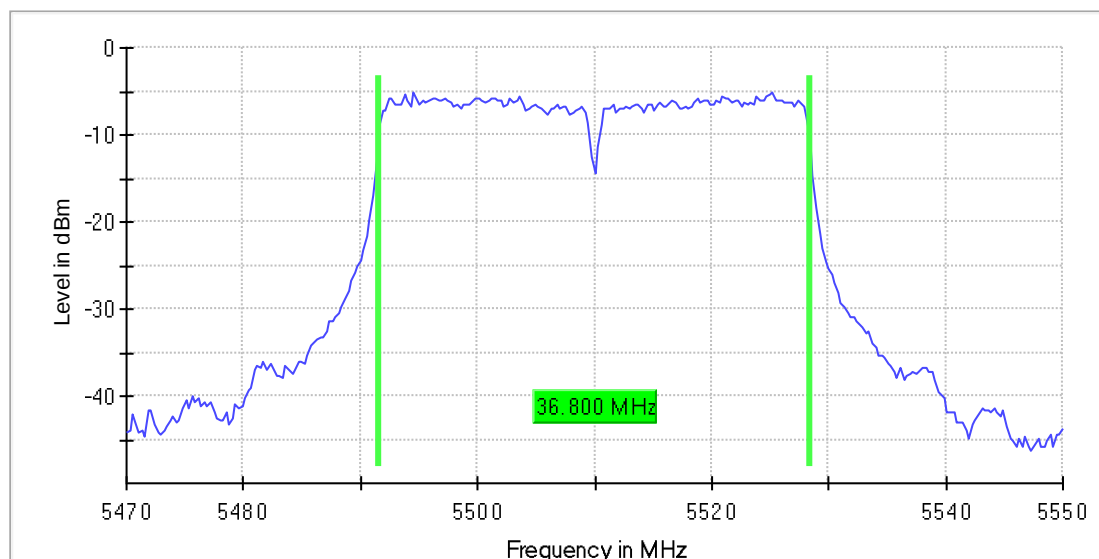

Occupied Channel Bandwidth 99% (5550 MHz; 12,000 dBm; 40 MHz)


Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5550.000000	36.533333	---	---	5531.600000	5568.133333

(continuation of the "99 % Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Result
5550.000000	PASS

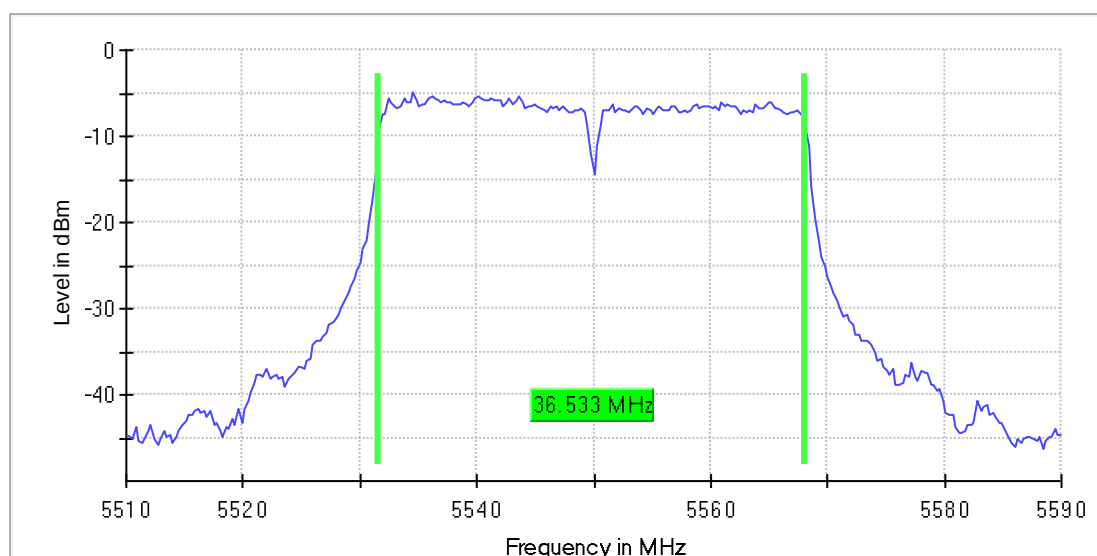

Occupied Channel Bandwidth 99% (5670 MHz; 12,000 dBm; 40 MHz)


Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5670.000000	36.533333	---	---	5651.600000	5688.133333

(continuation of the "99 % Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Result
5670.000000	PASS

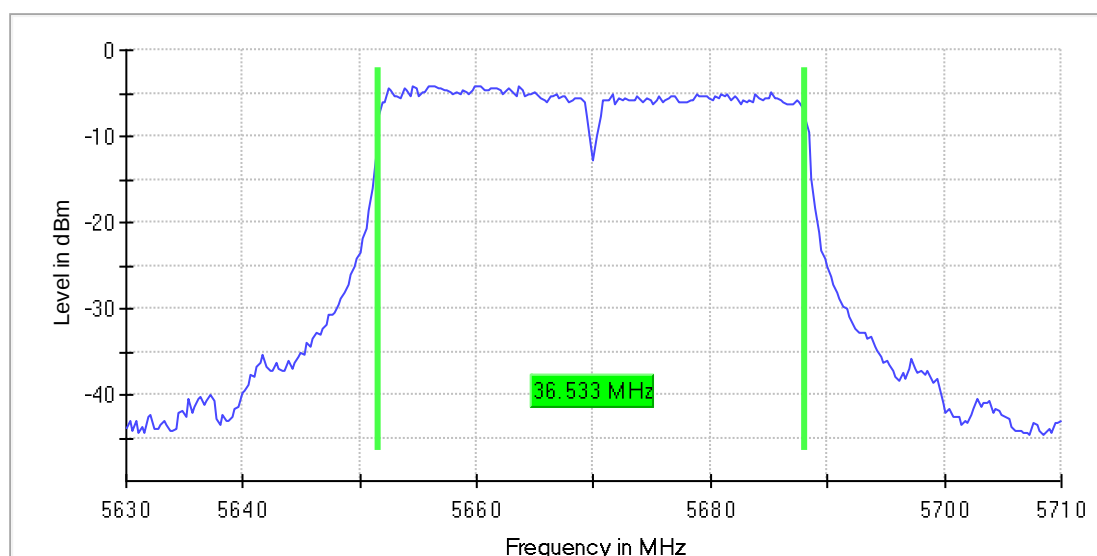

Occupied Channel Bandwidth 99 % (5755 MHz; 12,000 dBm; 40 MHz)


Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5755.000000	36.800000	---	---	5736.600000	5773.400000

(continuation of the "99 % Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Result
5755.000000	PASS

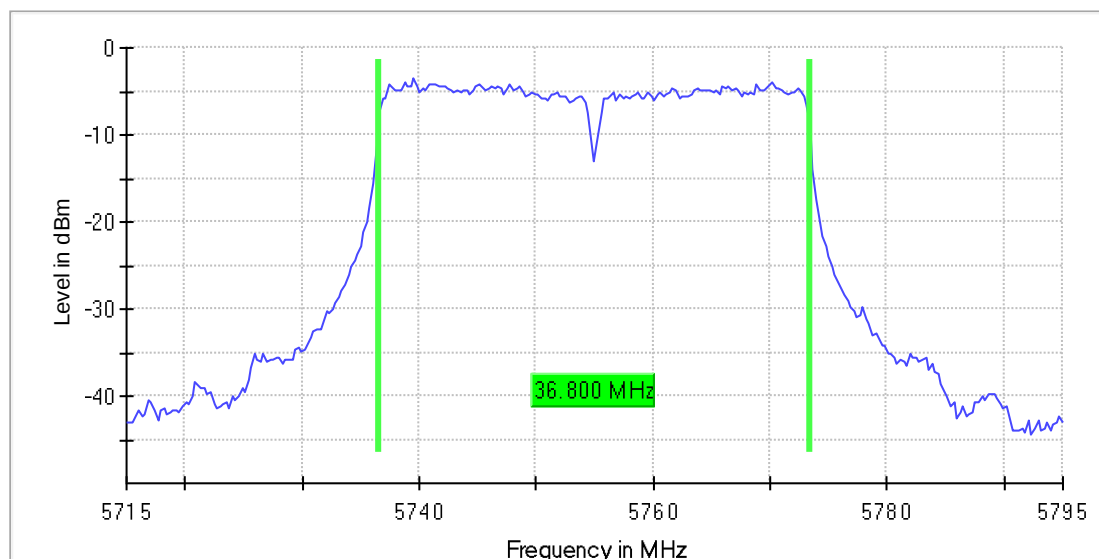

Occupied Channel Bandwidth 99 % (5795 MHz; 12,000 dBm; 40 MHz)


Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5795.000000	36.533333	---	---	5776.600000	5813.133333

(continuation of the "99 % Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Result
5795.000000	PASS

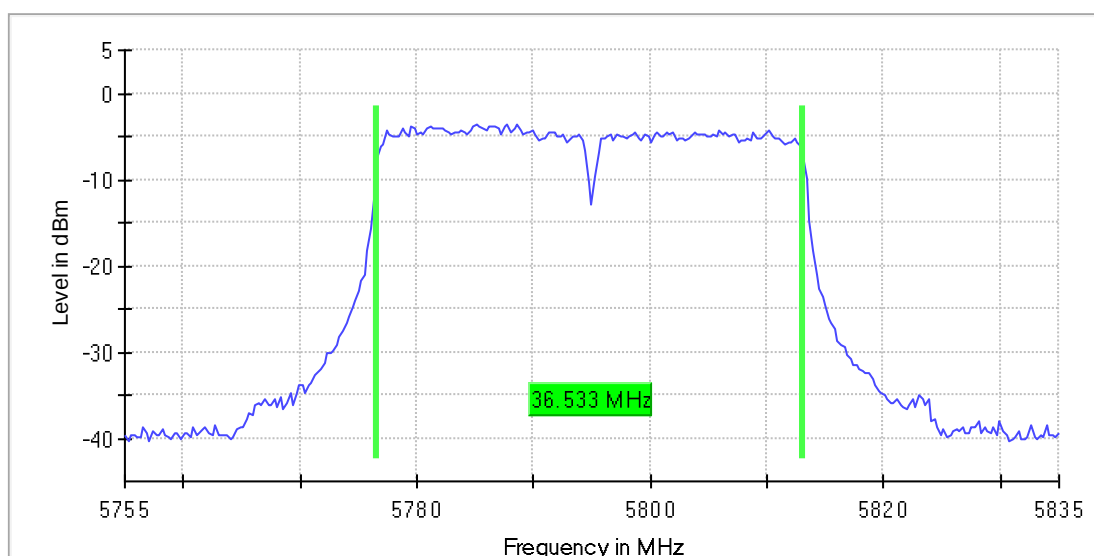

2.4.3. 80MHz Bandwidth

ac-mode

Occupied Channel Bandwidth 99% (5210 MHz; 12,000 dBm; 80 MHz)


Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5210.000000	75.384615	---	---	5172.051282	5247.435897

(continuation of the "99 % Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Result
5210.000000	PASS

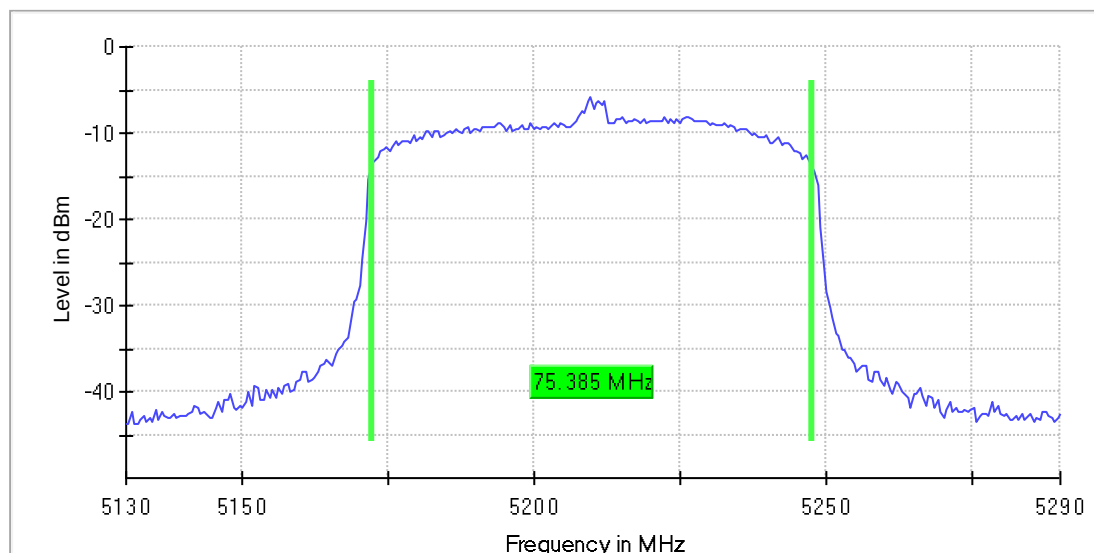

Occupied Channel Bandwidth 99% (5290 MHz; 12,000 dBm; 80 MHz)


Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5290.000000	75.897436	---	---	5252.051282	5327.948718

(continuation of the "99 % Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Result
5290.000000	PASS

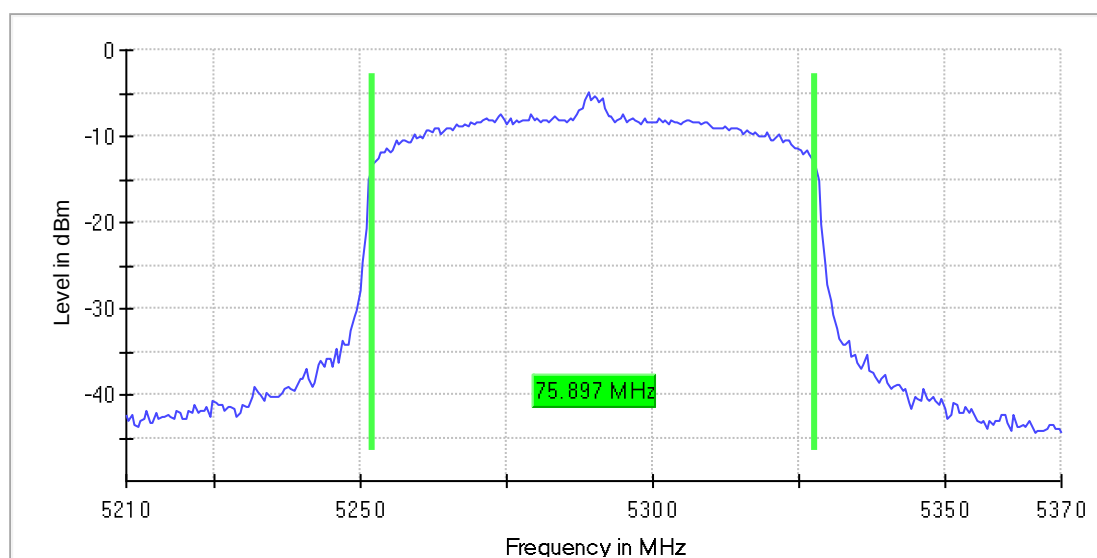

Occupied Channel Bandwidth 99% (5530 MHz; 12,000 dBm; 80 MHz)


Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5530.000000	75.897436	---	---	5492.051282	5567.948718

(continuation of the "99 % Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Result
5530.000000	PASS

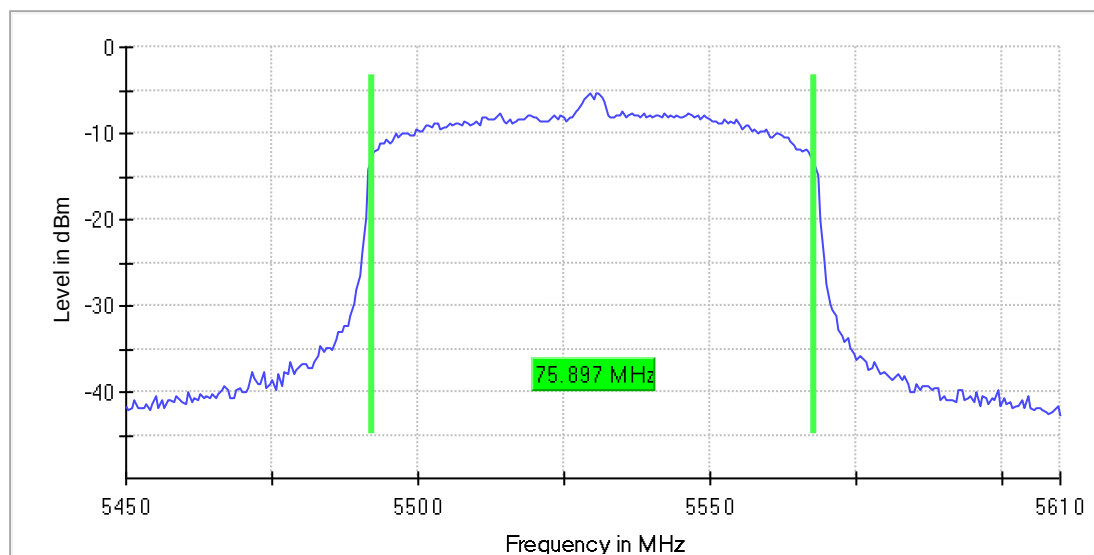

Occupied Channel Bandwidth 99% (5775 MHz; 12,000 dBm; 80 MHz)


Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5775.000000	75.384615	---	---	5737.051282	5812.435897

(continuation of the "99 % Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Result
5775.000000	PASS

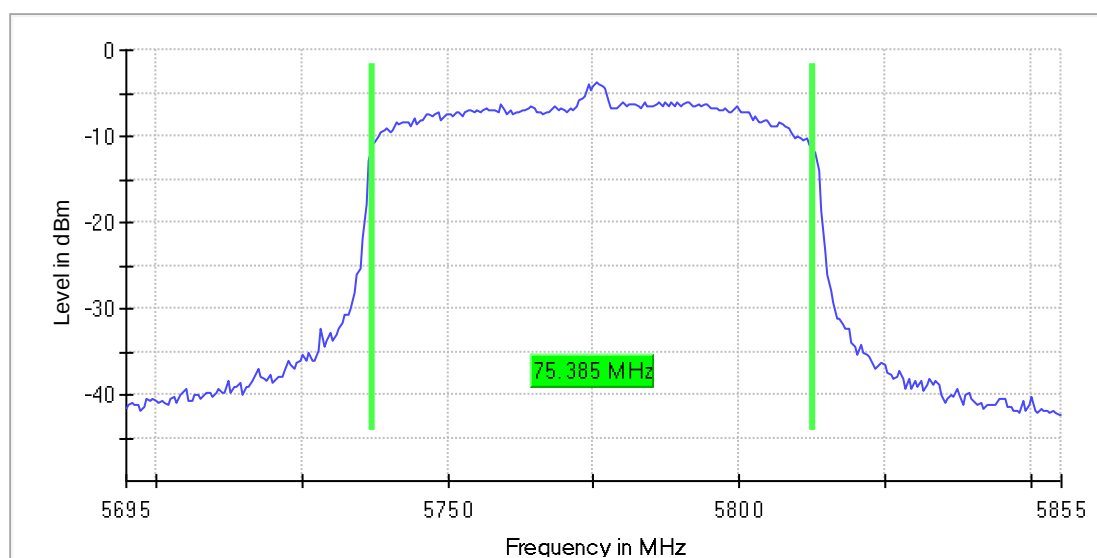

2.5. 26dB Bandwidth

2.5.1. 20MHz Bandwidth

a-mode

Emission Bandwidth 26 dB (5180 MHz; 12,000 dBm; 20 MHz)


Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10

26 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5180.000000	20.400000	---	---	5169.600000	5190.000000

(continuation of the "26 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
5180.000000	-2.7	PASS

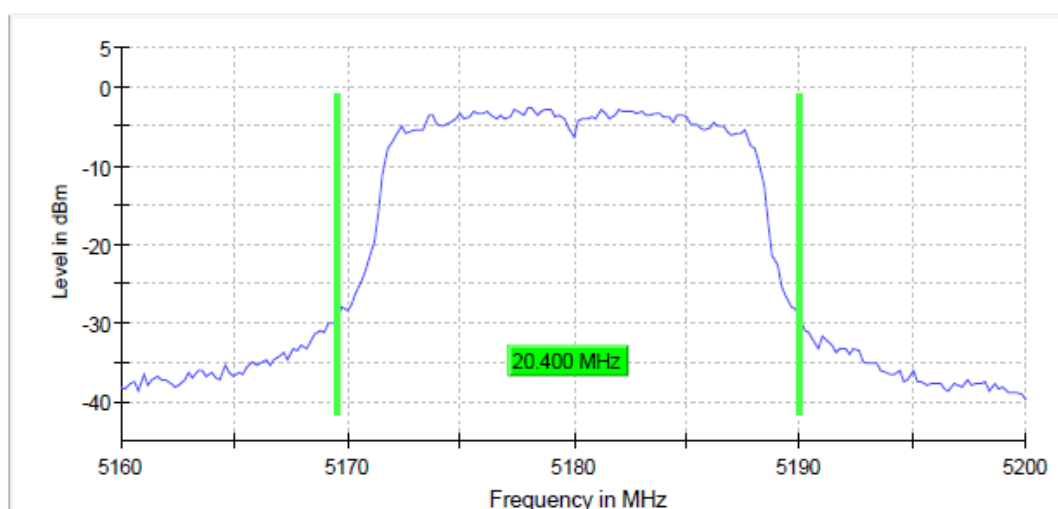

Emission Bandwidth 26 dB (5200 MHz; 12,000 dBm; 20 MHz)


Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures
New Rules v01r03 and ANSI C63.10

26 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5200.000000	20.000000	---	---	5190.000000	5210.000000

(continuation of the "26 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
5200.000000	-2.9	PASS

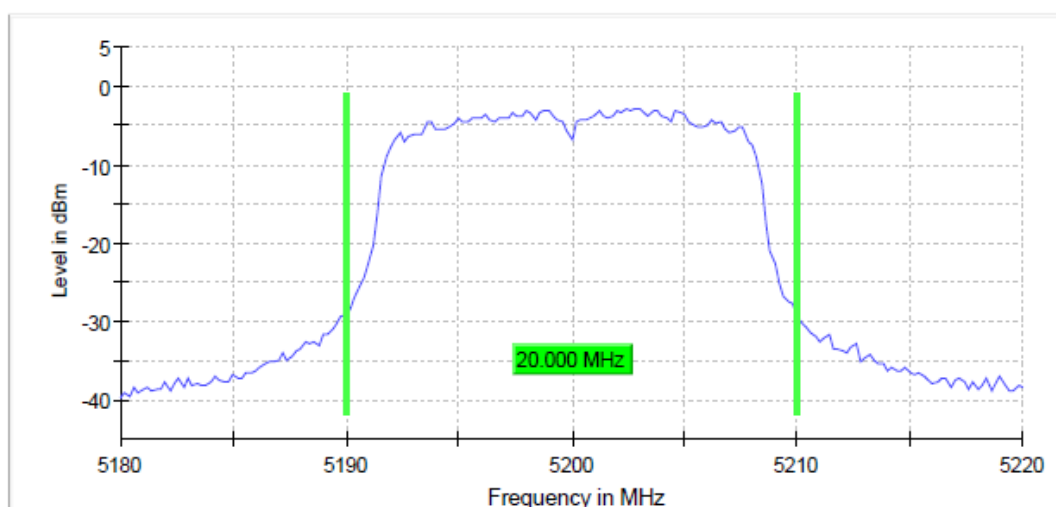

Emission Bandwidth 26 dB (5240 MHz; 12,000 dBm; 20 MHz)


Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures
New Rules v01r03 and ANSI C63.10

26 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5240.000000	20.000000	---	---	5229.800000	5249.800000

(continuation of the "26 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
5240.000000	-2.2	PASS

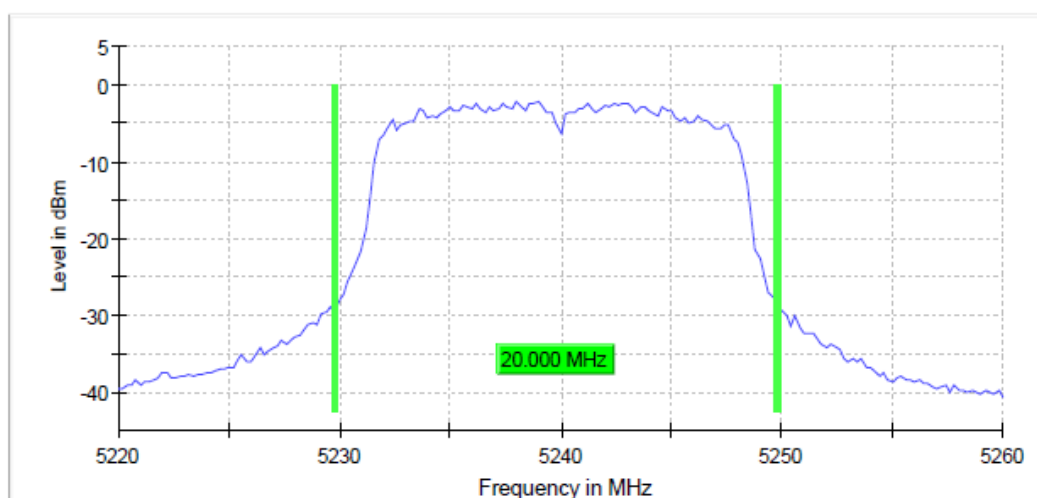

Emission Bandwidth 26 dB (5260 MHz; 12,000 dBm; 20 MHz)


Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures
New Rules v01r03 and ANSI C63.10

26 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5260.000000	26.800000	---	---	5250.000000	5276.800000

(continuation of the "26 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
5260.000000	-2.6	PASS

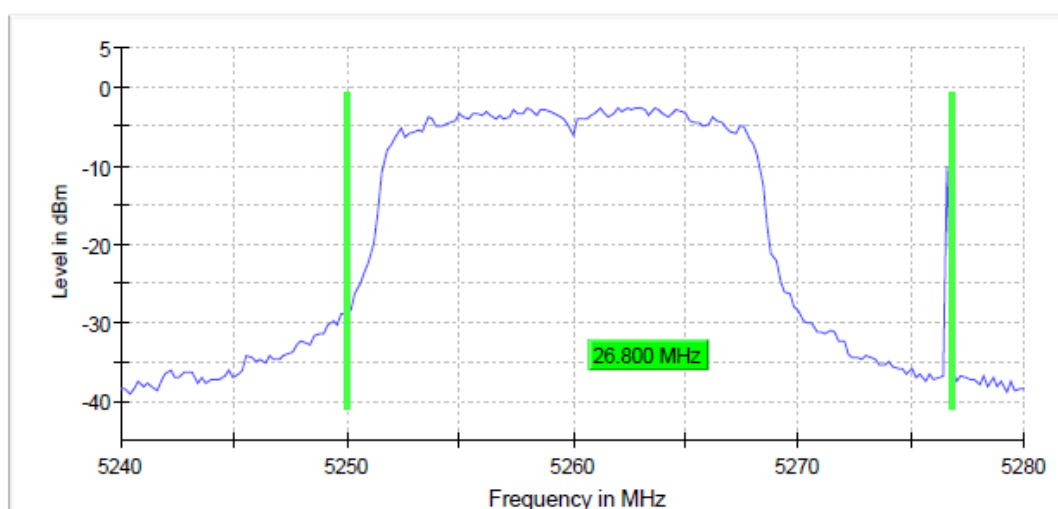

Emission Bandwidth 26 dB (5280 MHz; 12,000 dBm; 20 MHz)


Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures
New Rules v01r03 and ANSI C63.10

26 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5280.000000	20.200000	---	---	5270.000000	5290.200000

(continuation of the "26 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
5280.000000	-1.5	PASS

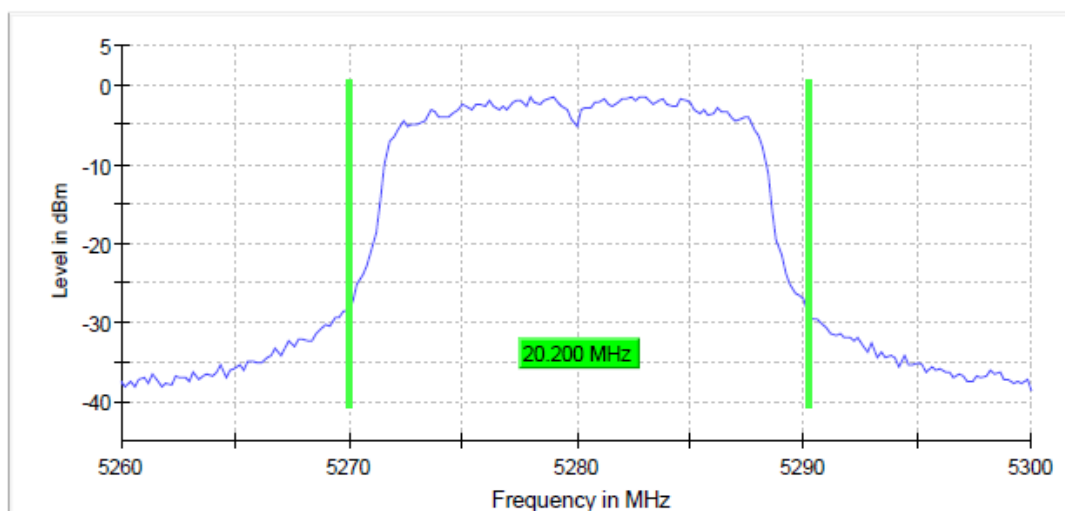

Emission Bandwidth 26 dB (5320 MHz; 12,000 dBm; 20 MHz)


Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10

26 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5320.000000	20.200000	---	---	5309.800000	5330.000000

(continuation of the "26 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
5320.000000	-1.9	PASS

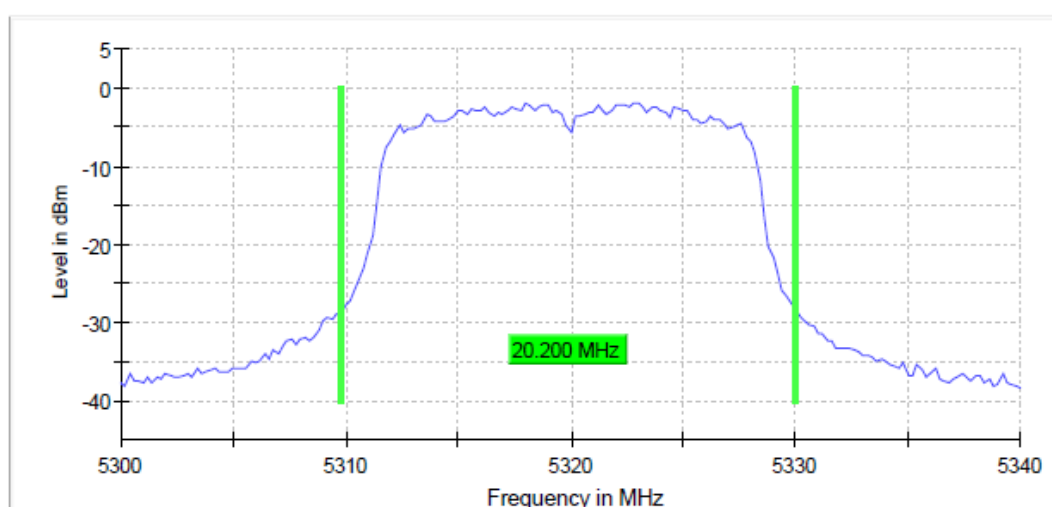

Emission Bandwidth 26 dB (5500 MHz; 12,000 dBm; 20 MHz)


Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures
New Rules v01r03 and ANSI C63.10

26 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5500.000000	20.200000	---	---	5490.000000	5510.200000

(continuation of the "26 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
5500.000000	-1.7	PASS

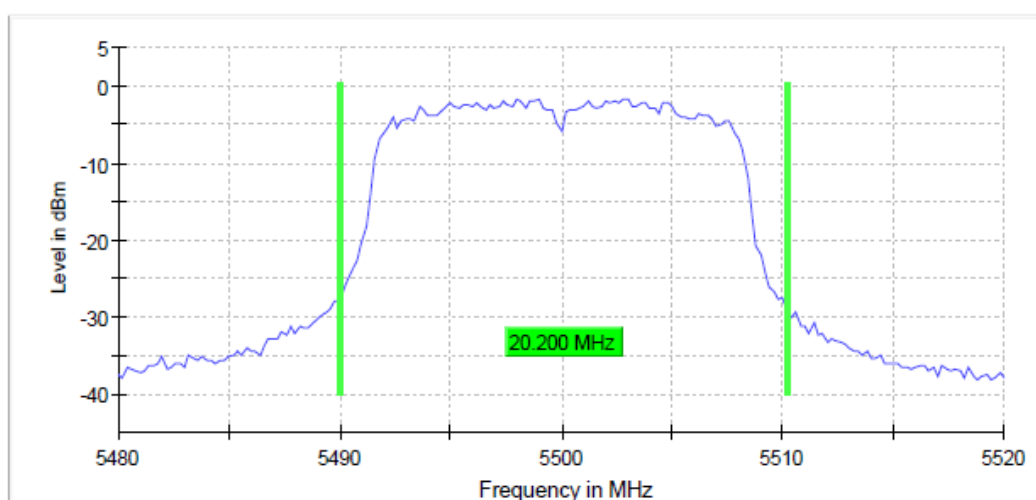

Emission Bandwidth 26 dB (5540 MHz; 12,000 dBm; 20 MHz)


Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures
New Rules v01r03 and ANSI C63.10

26 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5540.000000	20.000000	---	---	5530.000000	5550.000000

(continuation of the "26 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
5540.000000	-1.2	PASS

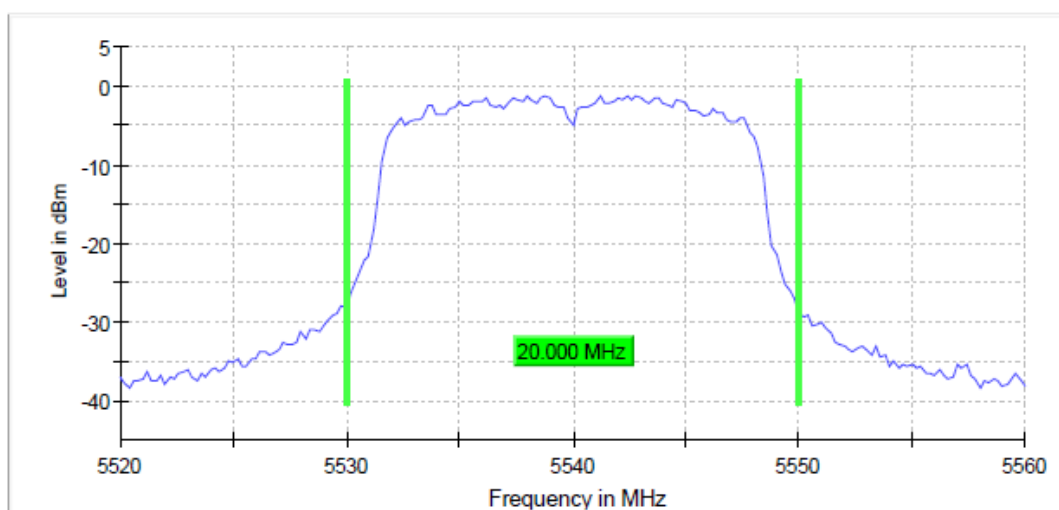

Emission Bandwidth 26 dB (5580 MHz; 12,000 dBm; 20 MHz)


Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures
New Rules v01r03 and ANSI C63.10

26 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5580.000000	20.000000	---	---	5570.000000	5590.000000

(continuation of the "26 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
5580.000000	-0.4	PASS

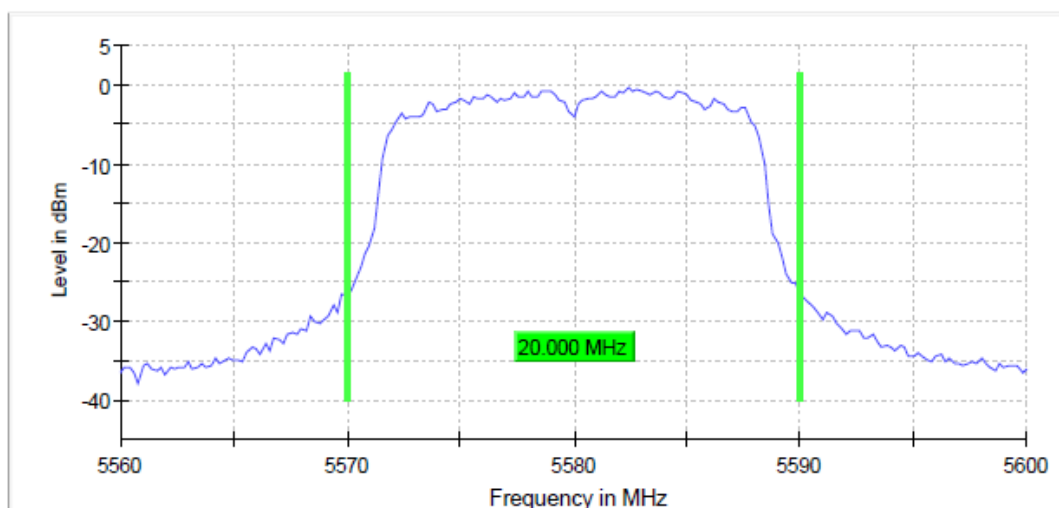

Emission Bandwidth 26 dB (5660 MHz; 12,000 dBm; 20 MHz)


Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10

26 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5660.000000	19.800000	---	---	5650.000000	5669.800000

(continuation of the "26 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
5660.000000	-0.4	PASS

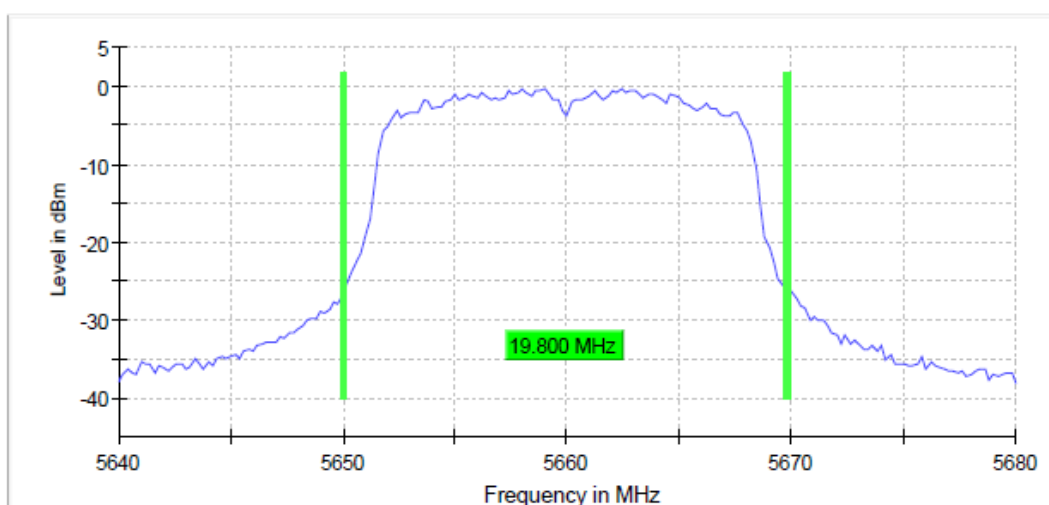

Emission Bandwidth 26 dB (5680 MHz; 12,000 dBm; 20 MHz)


Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures
New Rules v01r03 and ANSI C63.10

26 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5680.000000	23.000000	---	---	5669.800000	5692.800000

(continuation of the "26 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
5680.000000	-1.1	PASS

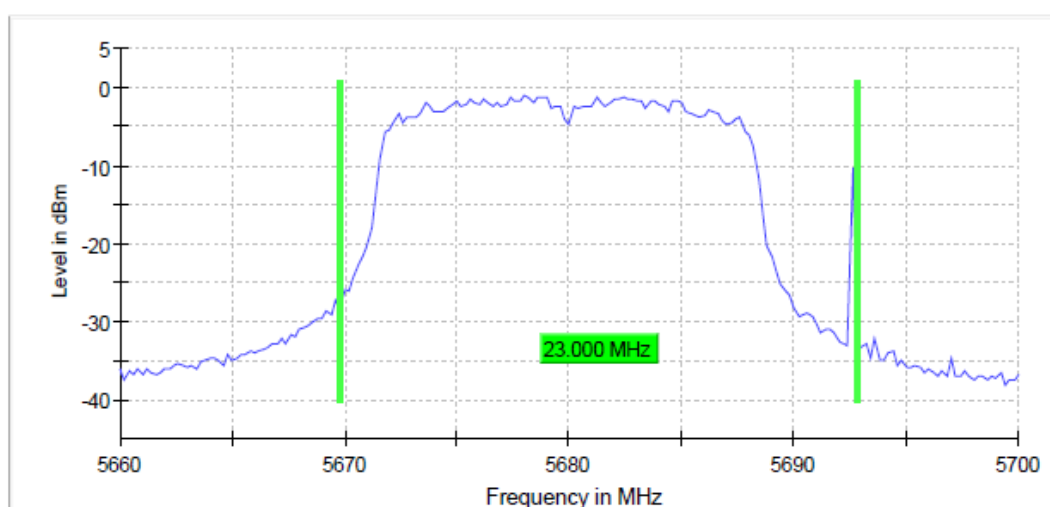

Emission Bandwidth 26 dB (5700 MHz; 12,000 dBm; 20 MHz)


Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10

26 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5700.000000	20.000000	---	---	5690.000000	5710.000000

(continuation of the "26 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
5700.000000	-1.3	PASS

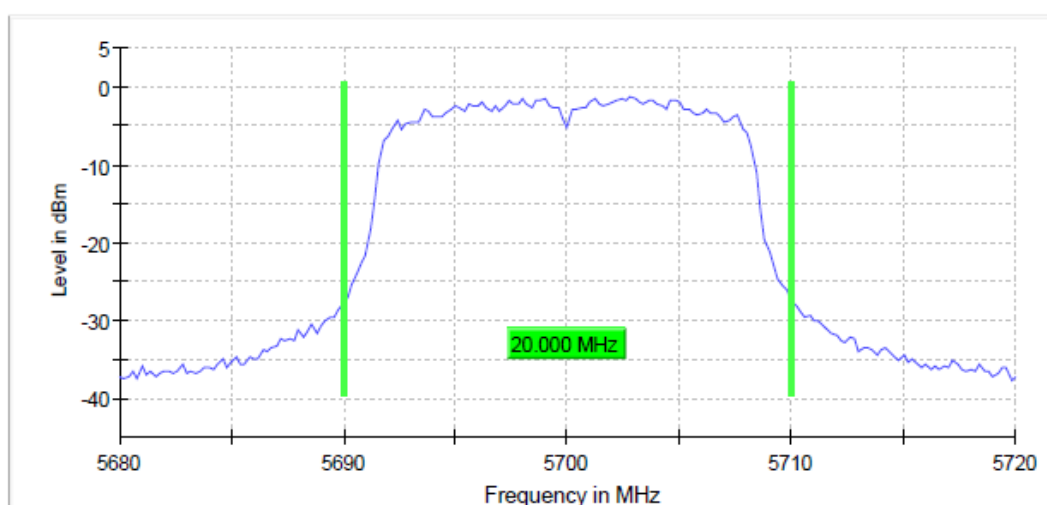

Emission Bandwidth 26 dB (5745 MHz; 12,000 dBm; 20 MHz)


Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures
New Rules v01r03 and ANSI C63.10

26 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5745.000000	20.000000	---	---	5734.800000	5754.800000

(continuation of the "26 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
5745.000000	-0.8	PASS

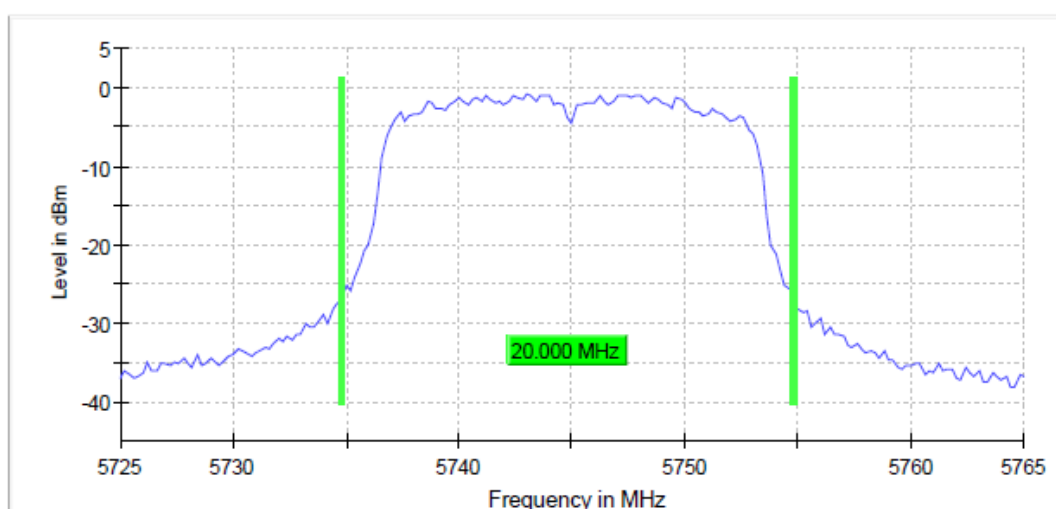

Emission Bandwidth 26 dB (5785 MHz; 12,000 dBm; 20 MHz)


Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures
New Rules v01r03 and ANSI C63.10

26 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5785.000000	19.800000	---	---	5775.000000	5794.800000

(continuation of the "26 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
5785.000000	-0.2	PASS

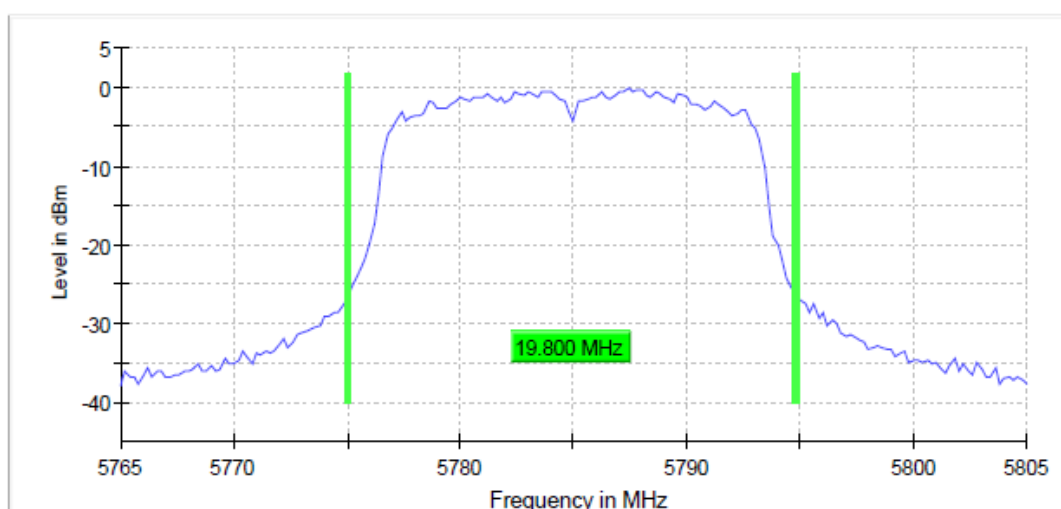

Emission Bandwidth 26 dB (5825 MHz; 12,000 dBm; 20 MHz)


Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10

26 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5825.000000	20.400000	---	---	5814.800000	5835.200000

(continuation of the "26 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
5825.000000	-1.8	PASS

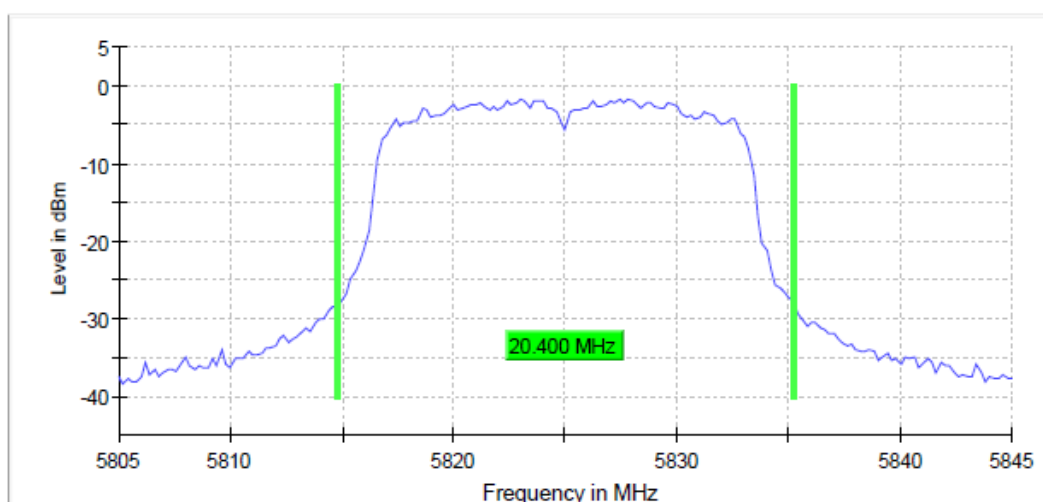

n-mode

Emission Bandwidth 26 dB (5180 MHz; 12,000 dBm; 20 MHz)


Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10

26 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5180.000000	23.000000	---	---	5168.200000	5191.200000

(continuation of the "26 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
5180.000000	-4.3	PASS

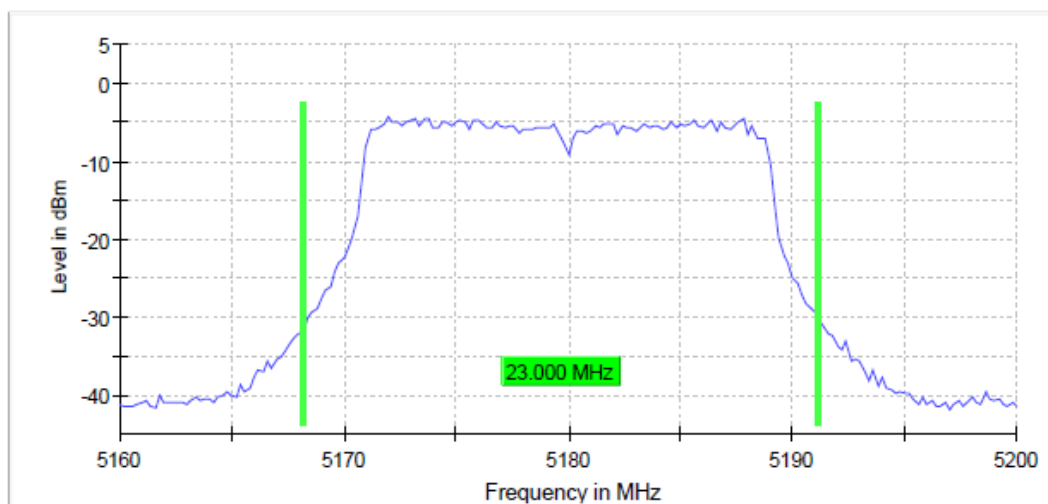

Emission Bandwidth 26 dB (5200 MHz; 12,000 dBm; 20 MHz)


Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures
New Rules v01r03 and ANSI C63.10

26 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5200.000000	22.600000	---	---	5188.600000	5211.200000

(continuation of the "26 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
5200.000000	-4.1	PASS

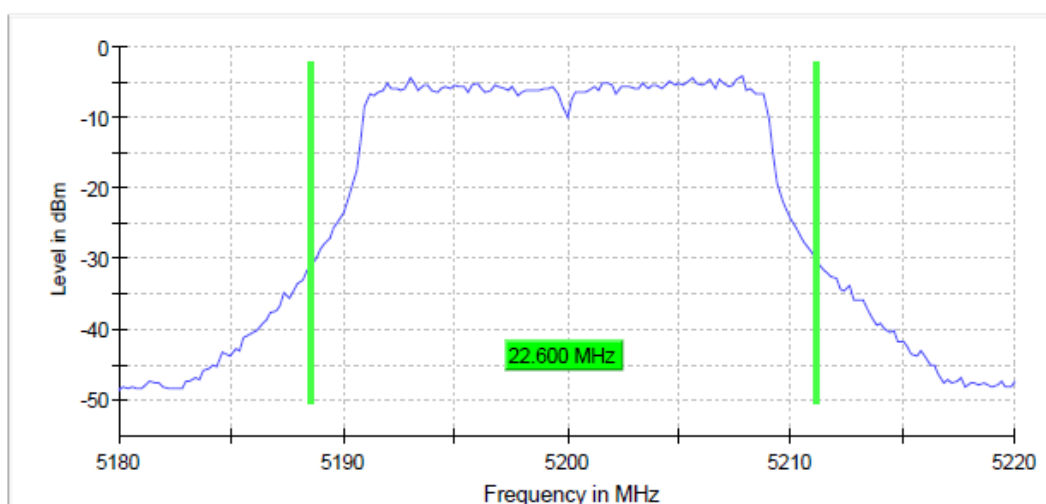

Emission Bandwidth 26 dB (5240 MHz; 12,000 dBm; 20 MHz)


Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures
New Rules v01r03 and ANSI C63.10

26 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5240.000000	22.400000	---	---	5228.600000	5251.000000

(continuation of the "26 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
5240.000000	-2.9	PASS

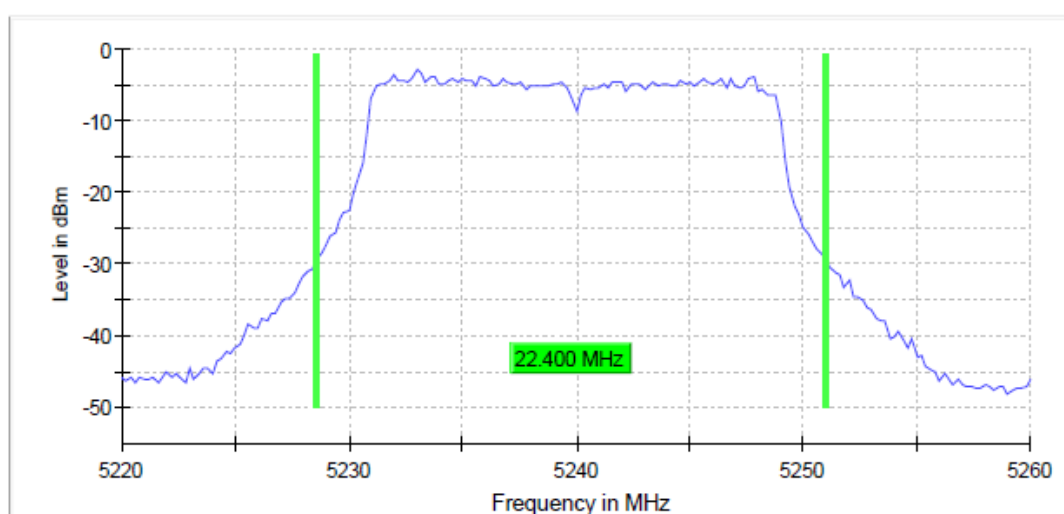

Emission Bandwidth 26 dB (5260 MHz; 12,000 dBm; 20 MHz)


Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures
New Rules v01r03 and ANSI C63.10

26 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5260.000000	22.600000	---	---	5248.600000	5271.200000

(continuation of the "26 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
5260.000000	-3.8	PASS

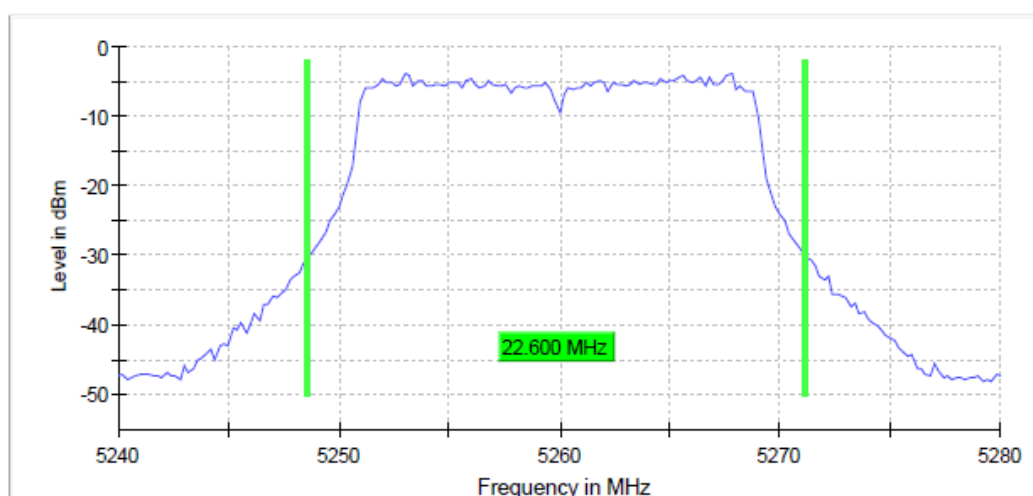

Emission Bandwidth 26 dB (5280 MHz; 12,000 dBm; 20 MHz)


Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10

26 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5280.000000	22.600000	---	---	5268.600000	5291.200000

(continuation of the "26 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
5280.000000	-2.9	PASS

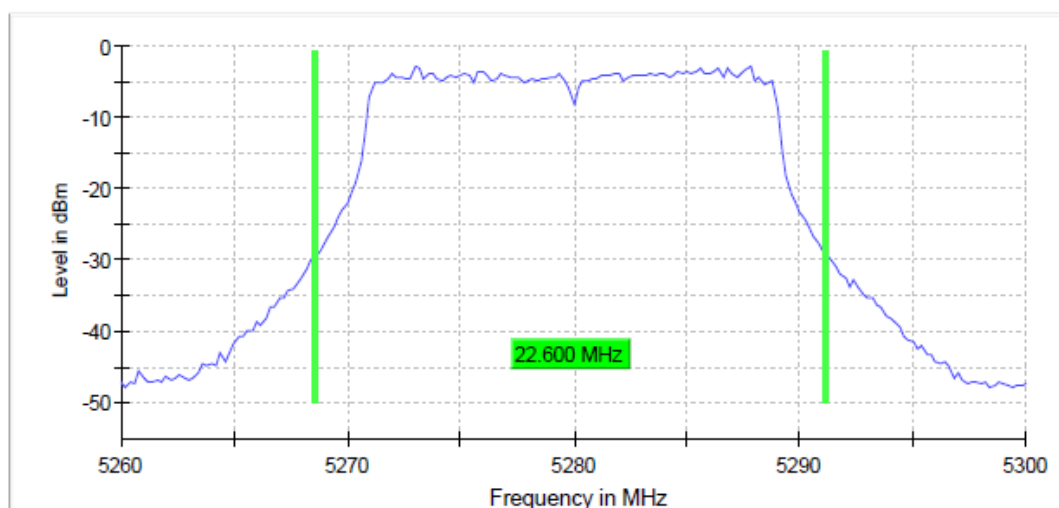

Emission Bandwidth 26 dB (5320 MHz; 12,000 dBm; 20 MHz)


Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures
New Rules v01r03 and ANSI C63.10

26 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5320.000000	22.600000	---	---	5308.600000	5331.200000

(continuation of the "26 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
5320.000000	-3.0	PASS

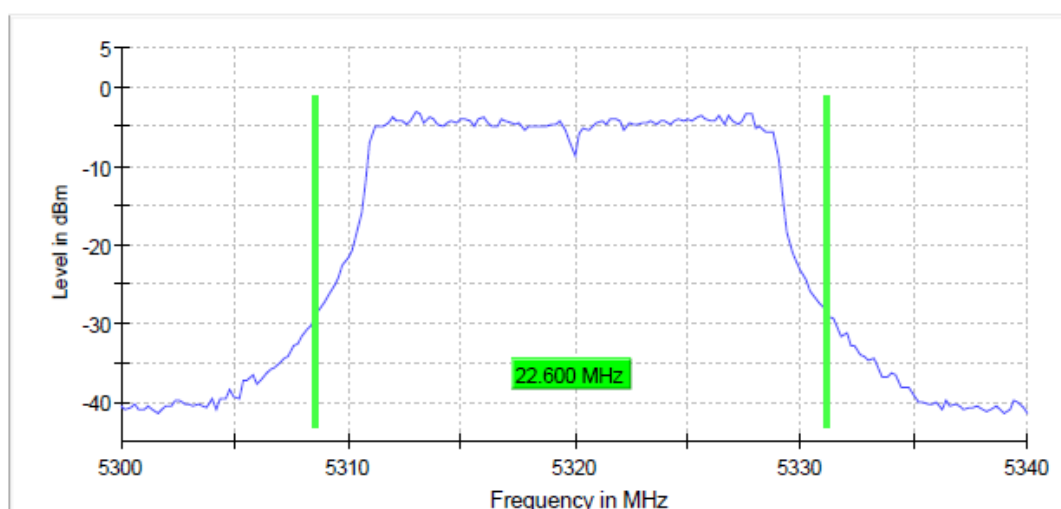

Emission Bandwidth 26 dB (5500 MHz; 12,000 dBm; 20 MHz)


Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures
New Rules v01r03 and ANSI C63.10

26 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5500.000000	22.400000	---	---	5488.600000	5511.000000

(continuation of the "26 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
5500.000000	-2.4	PASS

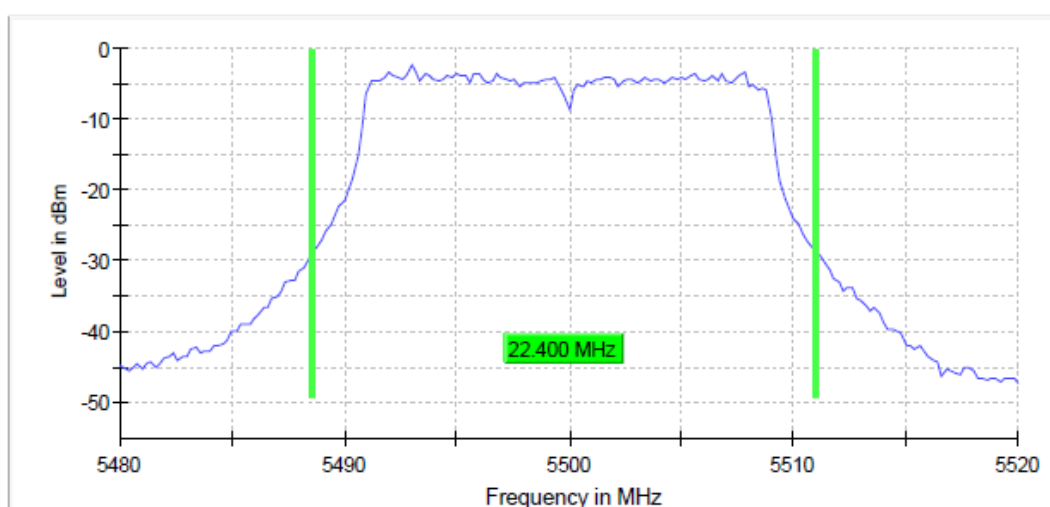

Emission Bandwidth 26 dB (5540 MHz; 12,000 dBm; 20 MHz)


Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10

26 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5540.000000	22.200000	---	---	5528.800000	5551.000000

(continuation of the "26 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
5540.000000	-2.6	PASS

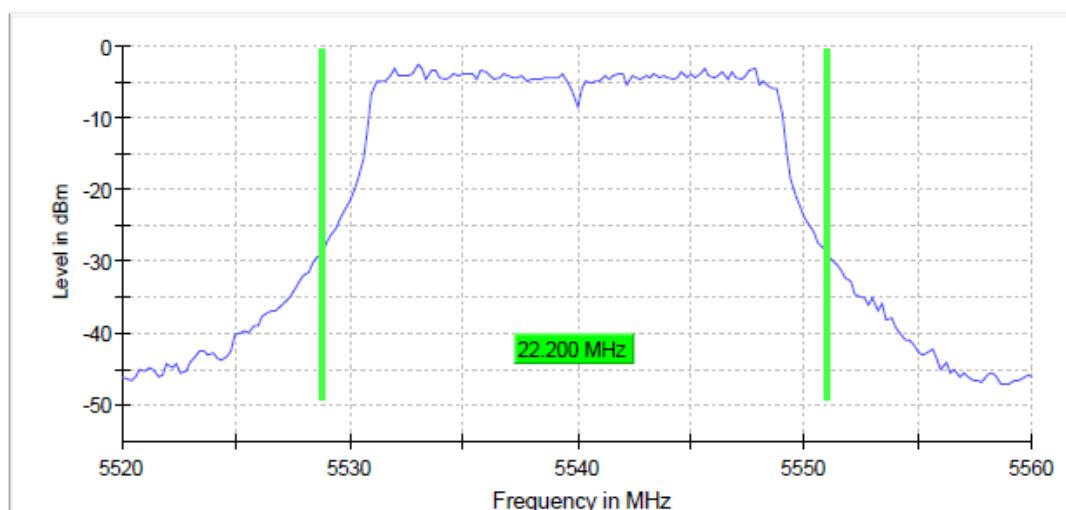

Emission Bandwidth 26 dB (5580 MHz; 12,000 dBm; 20 MHz)


Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10

26 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5580.000000	23.000000	---	---	5568.600000	5591.600000

(continuation of the "26 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
5580.000000	-1.8	PASS

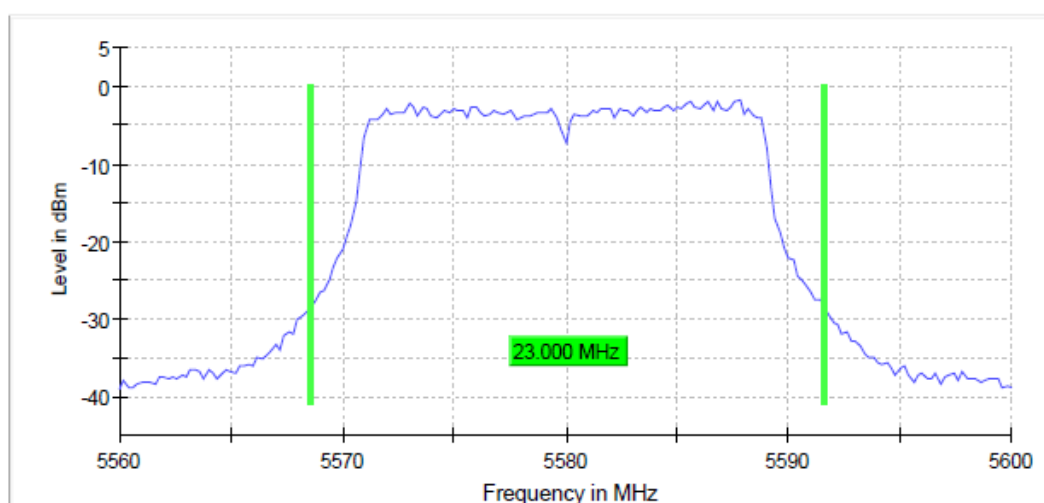

Emission Bandwidth 26 dB (5660 MHz; 12,000 dBm; 20 MHz)


Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures
New Rules v01r03 and ANSI C63.10

26 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5660.000000	22.600000	---	---	5648.400000	5671.000000

(continuation of the "26 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
5660.000000	-1.4	PASS

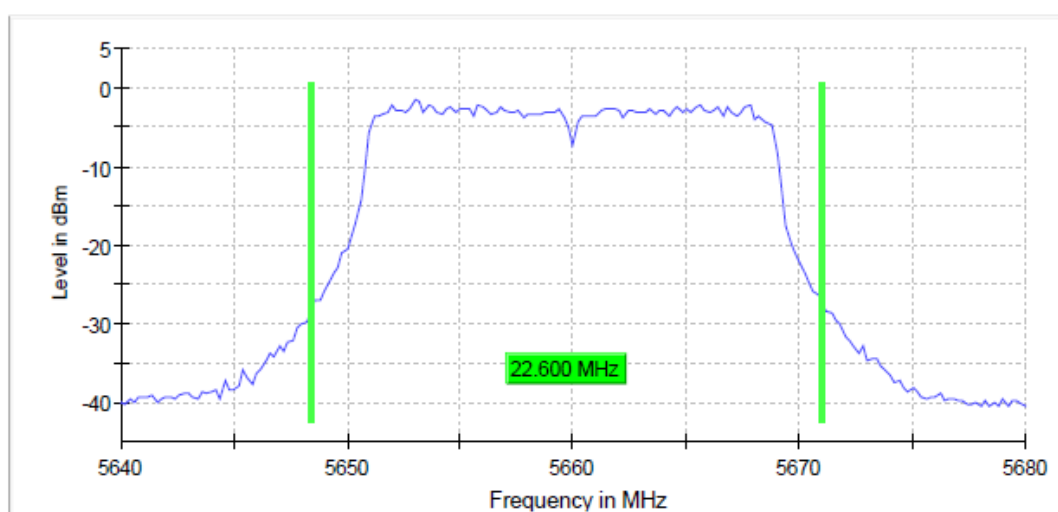

Emission Bandwidth 26 dB (5680 MHz; 12,000 dBm; 20 MHz)


Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures
New Rules v01r03 and ANSI C63.10

26 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5680.000000	22.400000	---	---	5668.600000	5691.000000

(continuation of the "26 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
5680.000000	-2.0	PASS

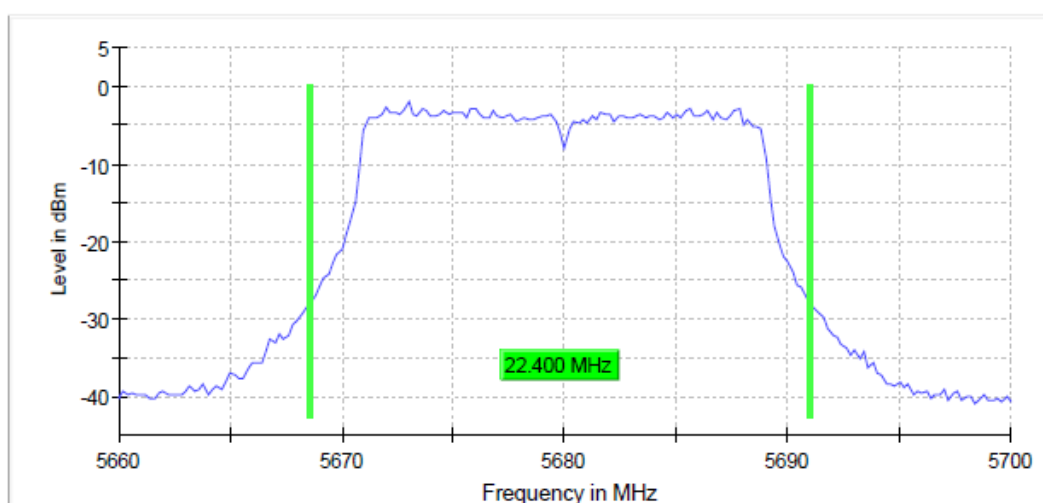

Emission Bandwidth 26 dB (5700 MHz; 12,000 dBm; 20 MHz)


Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10

26 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5700.000000	23.000000	---	---	5688.400000	5711.400000

(continuation of the "26 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
5700.000000	-2.5	PASS

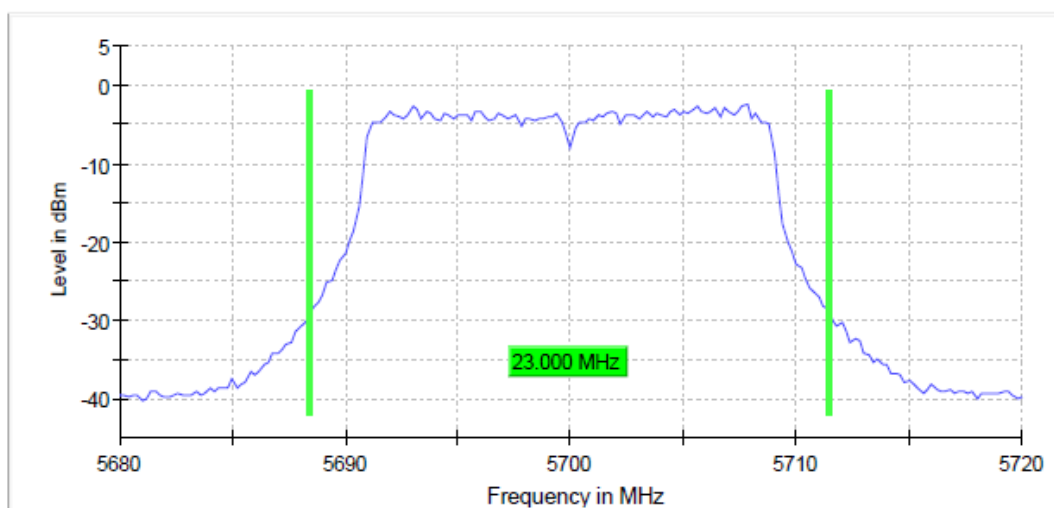

Emission Bandwidth 26 dB (5745 MHz; 12,000 dBm; 20 MHz)


Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10

26 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5745.000000	22.600000	---	---	5733.400000	5756.000000

(continuation of the "26 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
5745.000000	-1.4	PASS

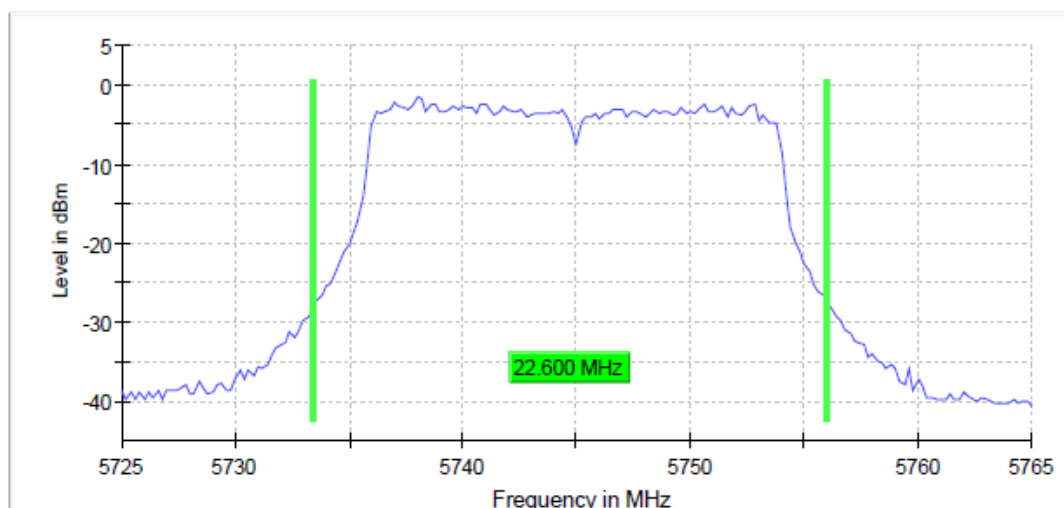

Emission Bandwidth 26 dB (5785 MHz; 12,000 dBm; 20 MHz)


Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10

26 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5785.000000	22.600000	---	---	5773.800000	5796.400000

(continuation of the "26 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
5785.000000	-1.3	PASS

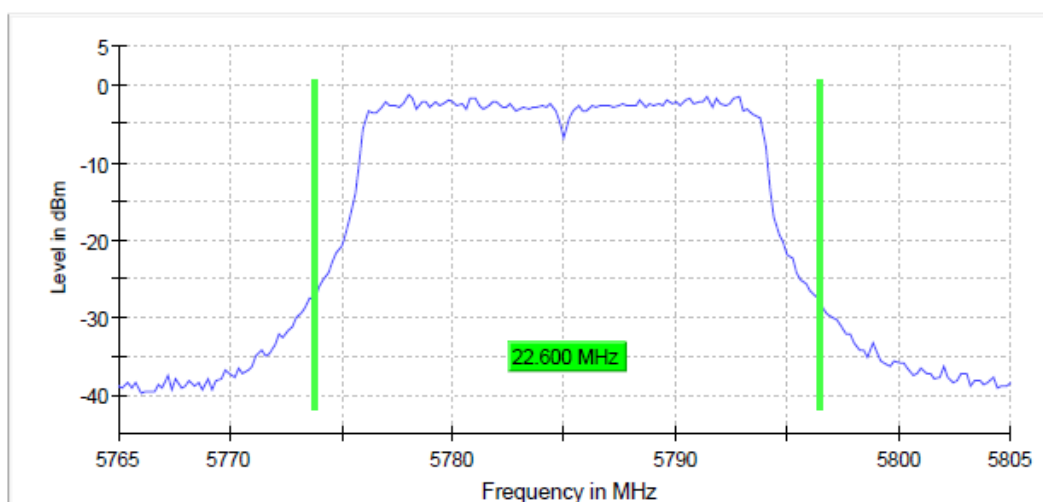

Emission Bandwidth 26 dB (5825 MHz; 12,000 dBm; 20 MHz)


Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures
New Rules v01r03 and ANSI C63.10

26 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5825.000000	22.800000	---	---	5813.400000	5836.200000

(continuation of the "26 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
5825.000000	-2.8	PASS

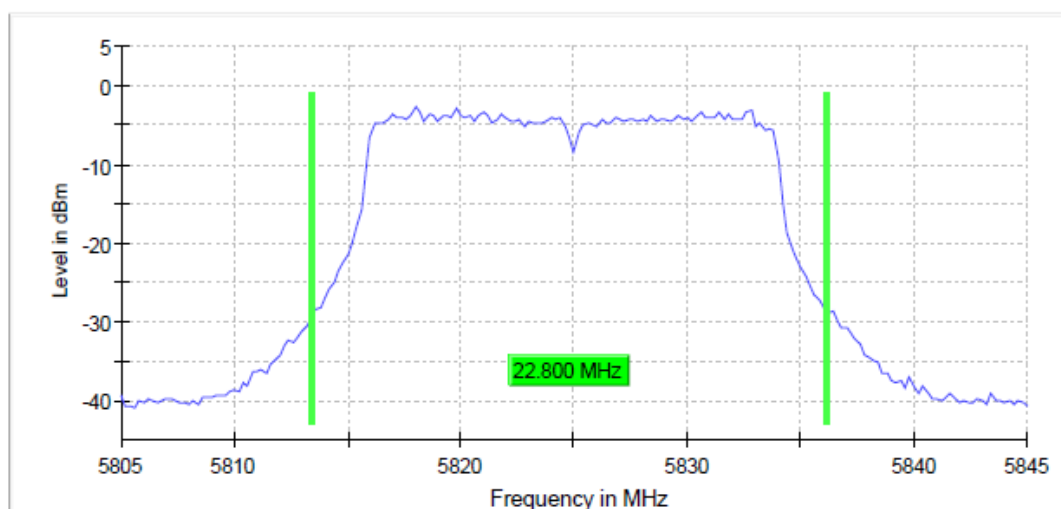

ac-mode

Emission Bandwidth 26 dB (5180 MHz; 12,000 dBm; 20 MHz)


Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10

26 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5180.000000	22.800000	---	---	5168.400000	5191.200000

(continuation of the "26 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
5180.000000	-3.2	PASS

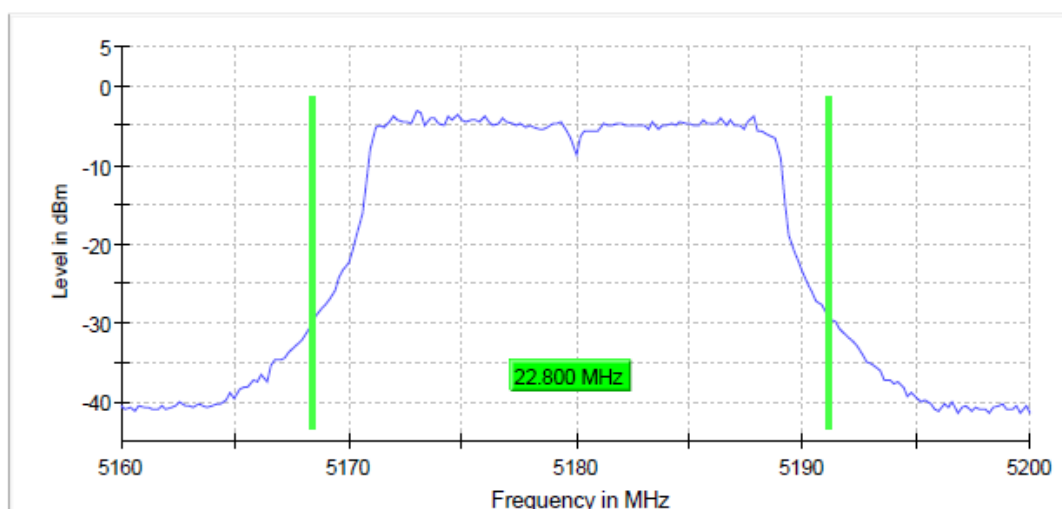

Emission Bandwidth 26 dB (5200 MHz; 12,000 dBm; 20 MHz)


Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures
New Rules v01r03 and ANSI C63.10

26 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5200.000000	22.400000	---	---	5188.800000	5211.200000

(continuation of the "26 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
5200.000000	-3.5	PASS

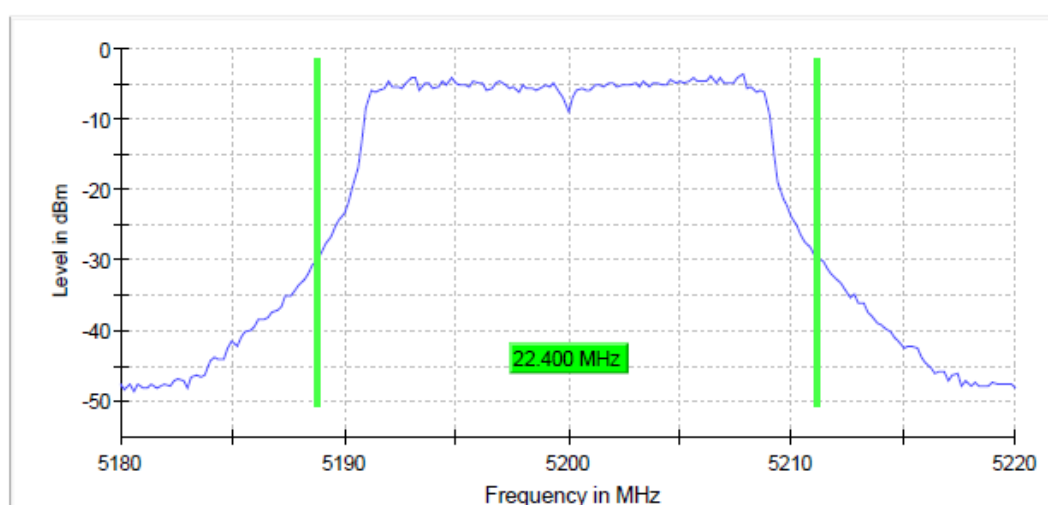

Emission Bandwidth 26 dB (5240 MHz; 12,000 dBm; 20 MHz)


Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10

26 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5240.000000	22.400000	---	---	5228.600000	5251.000000

(continuation of the "26 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
5240.000000	-2.8	PASS

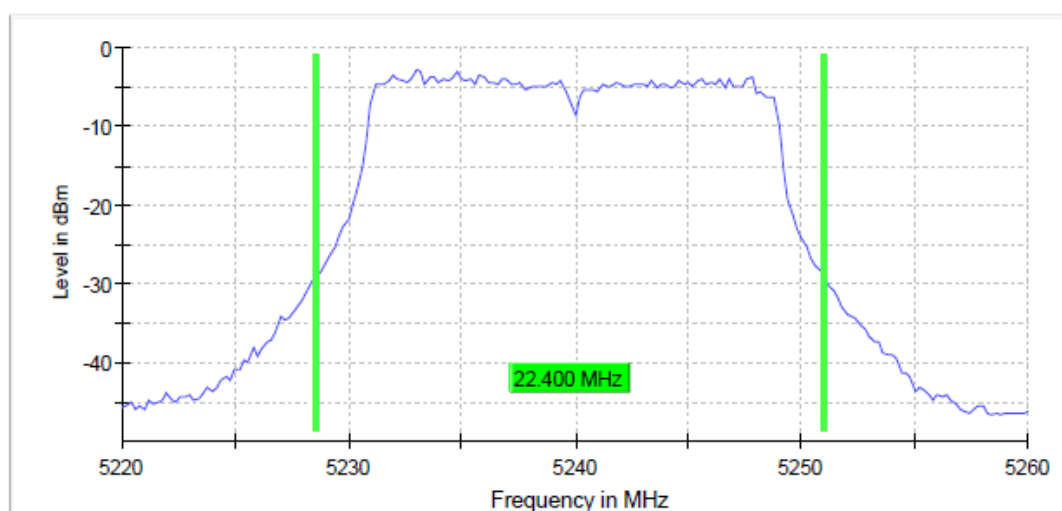

Emission Bandwidth 26 dB (5260 MHz; 12,000 dBm; 20 MHz)


Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures
New Rules v01r03 and ANSI C63.10

26 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5260.000000	22.600000	---	---	5248.600000	5271.200000

(continuation of the "26 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
5260.000000	-3.6	PASS

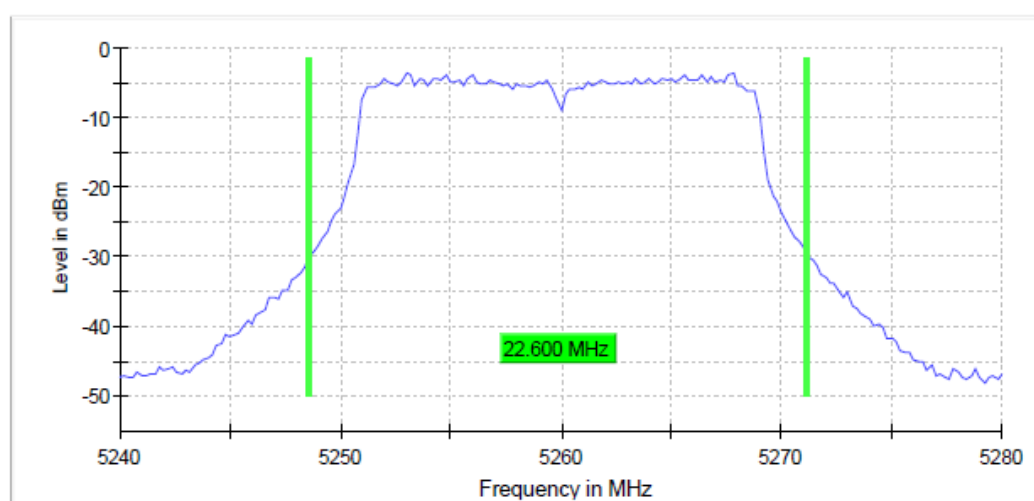

Emission Bandwidth 26 dB (5280 MHz; 12,000 dBm; 20 MHz)


Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10

26 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5280.000000	22.400000	---	---	5268.800000	5291.200000

(continuation of the "26 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
5280.000000	-2.7	PASS

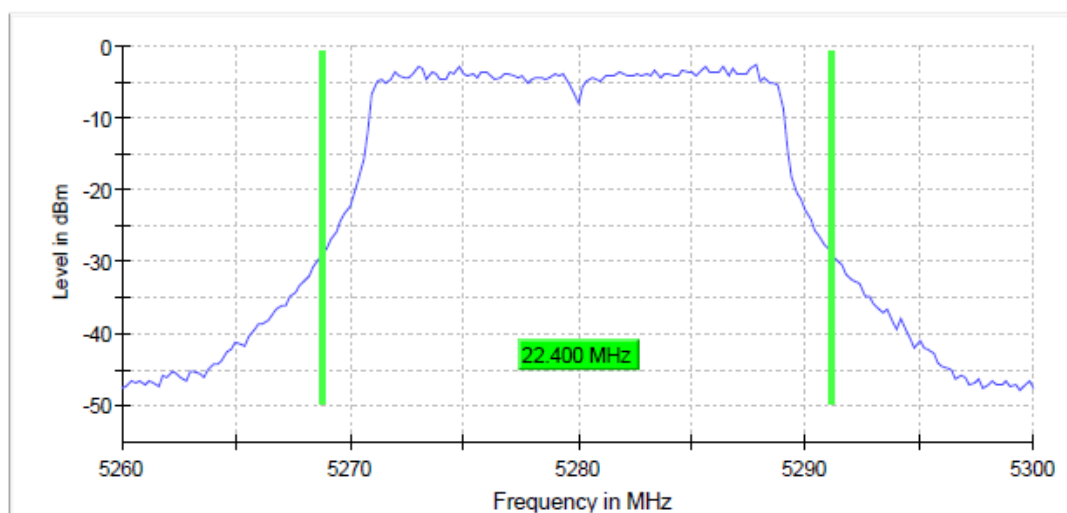

Emission Bandwidth 26 dB (5320 MHz; 12,000 dBm; 20 MHz)


Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures
New Rules v01r03 and ANSI C63.10

26 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5320.000000	23.000000	---	---	5308.400000	5331.400000

(continuation of the "26 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
5320.000000	-3.2	PASS

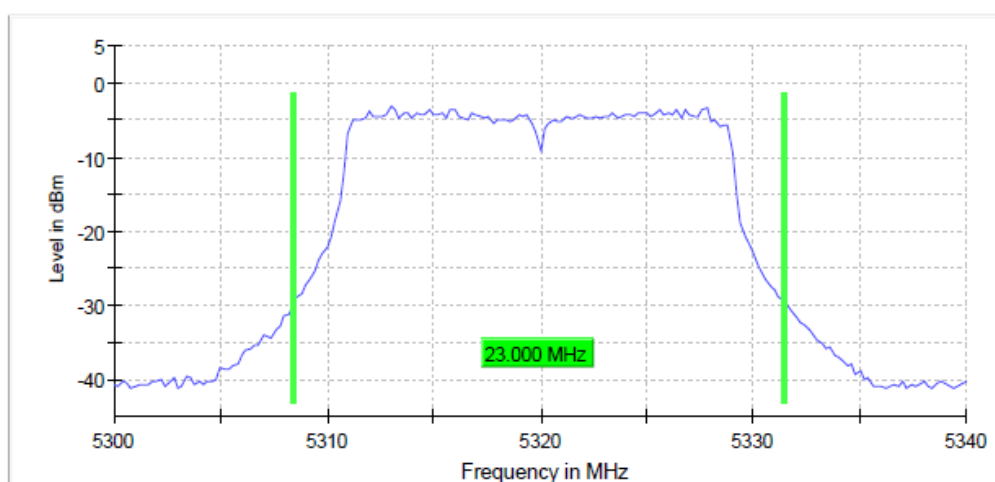

Emission Bandwidth 26 dB (5500 MHz; 12,000 dBm; 20 MHz)


Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures
New Rules v01r03 and ANSI C63.10

26 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5500.000000	22.800000	---	---	5488.400000	5511.200000

(continuation of the "26 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
5500.000000	-2.3	PASS

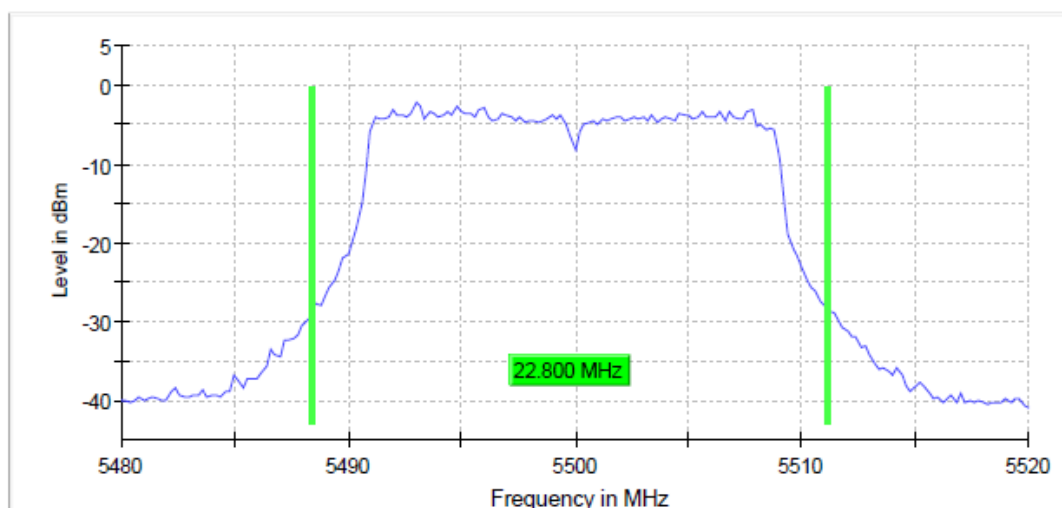

Emission Bandwidth 26 dB (5540 MHz; 12,000 dBm; 20 MHz)


Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures
New Rules v01r03 and ANSI C63.10

26 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5540.000000	22.600000	---	---	5528.600000	5551.200000

(continuation of the "26 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
5540.000000	-2.4	PASS

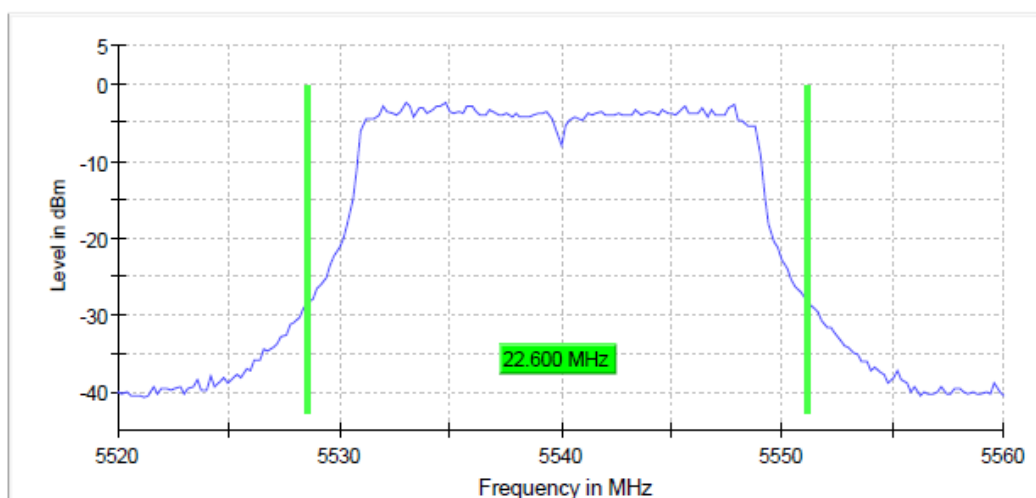

Emission Bandwidth 26 dB (5580 MHz; 12,000 dBm; 20 MHz)


Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures
New Rules v01r03 and ANSI C63.10

26 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5580.000000	23.000000	---	---	5568.600000	5591.600000

(continuation of the "26 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
5580.000000	-1.7	PASS

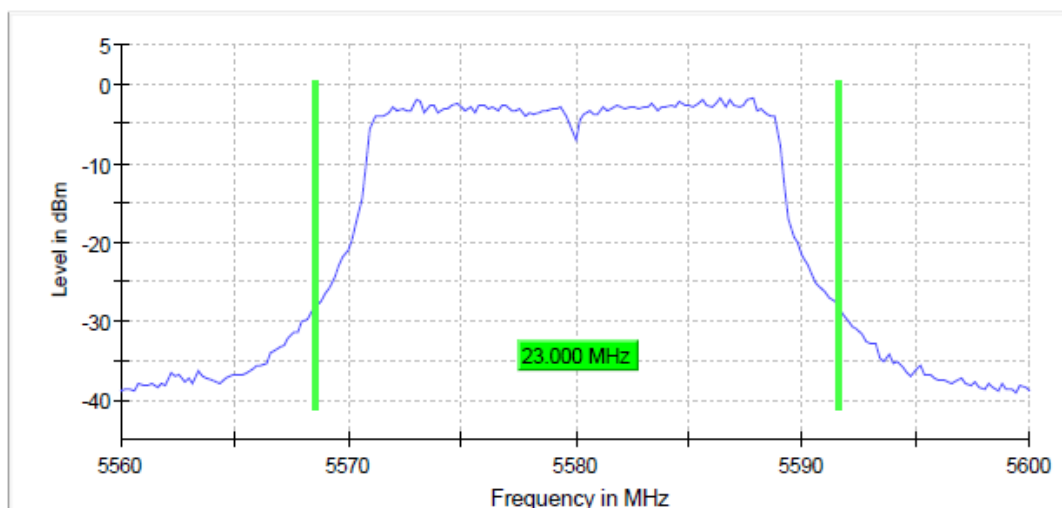

Emission Bandwidth 26 dB (5660 MHz; 12,000 dBm; 20 MHz)


Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures
New Rules v01r03 and ANSI C63.10

26 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5660.000000	22.600000	---	---	5648.600000	5671.200000

(continuation of the "26 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
5660.000000	-1.7	PASS

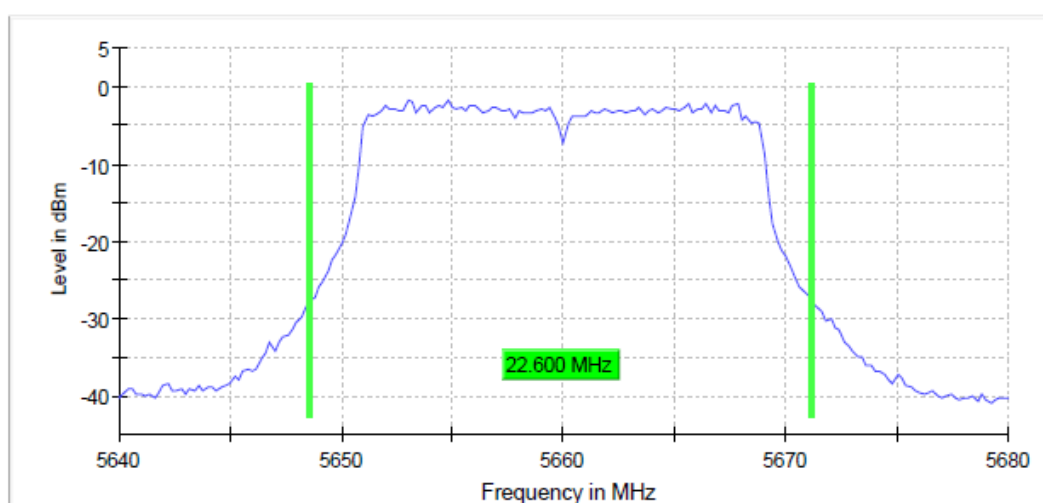

Emission Bandwidth 26 dB (5680 MHz; 12,000 dBm; 20 MHz)


Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10

26 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5680.000000	22.600000	---	---	5668.600000	5691.200000

(continuation of the "26 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
5680.000000	-2.0	PASS

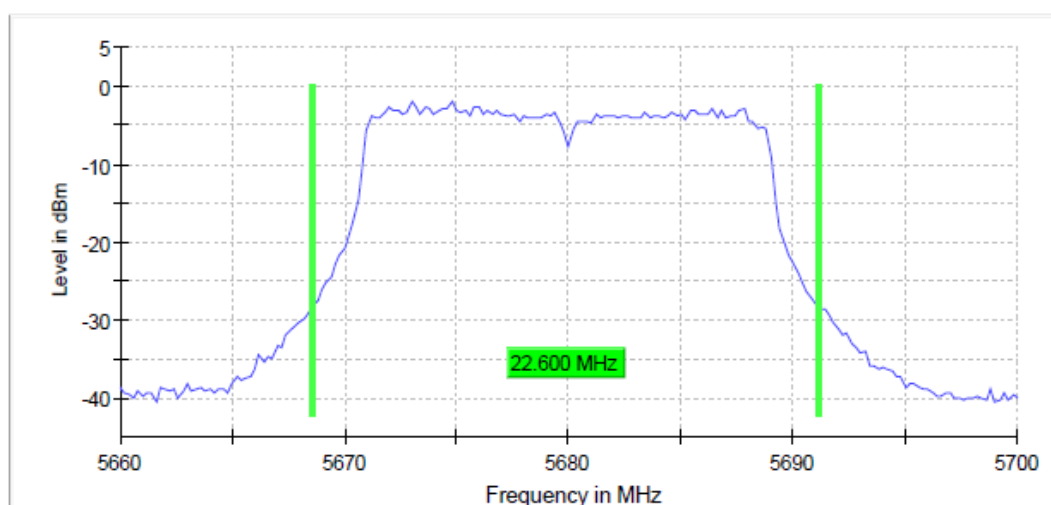

Emission Bandwidth 26 dB (5700 MHz; 12,000 dBm; 20 MHz)


Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10

26 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5700.000000	23.000000	---	---	5688.600000	5711.600000

(continuation of the "26 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
5700.000000	-2.6	PASS

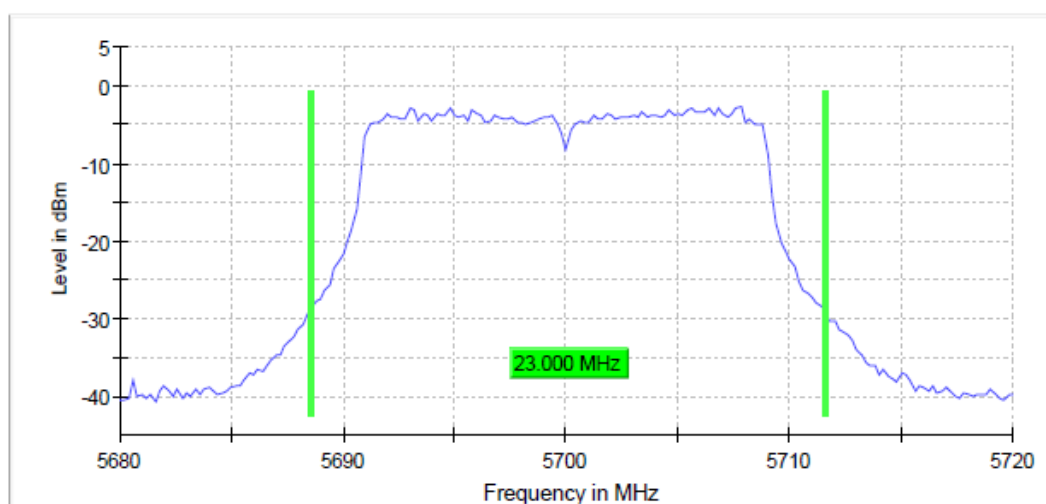

Emission Bandwidth 26 dB (5745 MHz; 12,000 dBm; 20 MHz)


Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10

26 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5745.000000	22.800000	---	---	5733.400000	5756.200000

(continuation of the "26 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
5745.000000	-1.4	PASS

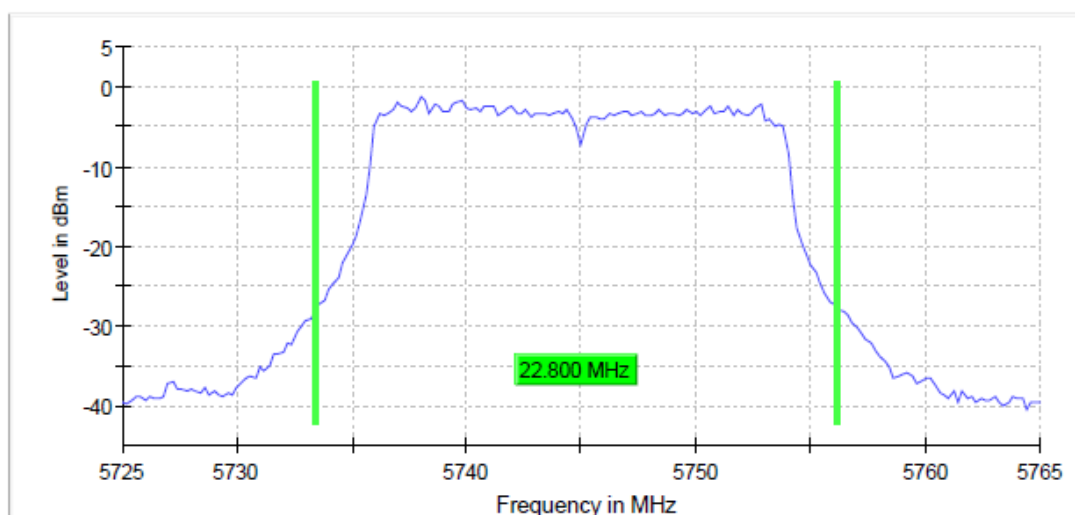

Emission Bandwidth 26 dB (5785 MHz; 12,000 dBm; 20 MHz)


Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures
New Rules v01r03 and ANSI C63.10

26 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5785.000000	22.800000	---	---	5773.600000	5796.400000

(continuation of the "26 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
5785.000000	-1.7	PASS

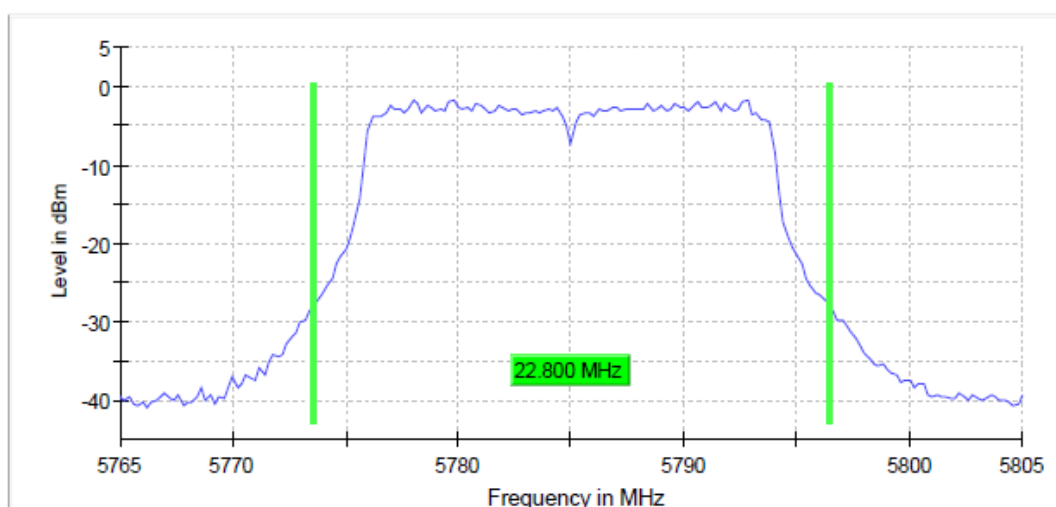

Emission Bandwidth 26 dB (5825 MHz; 12,000 dBm; 20 MHz)


Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures
New Rules v01r03 and ANSI C63.10

26 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5825.000000	23.000000	---	---	5813.400000	5836.400000

(continuation of the "26 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
5825.000000	-2.7	PASS

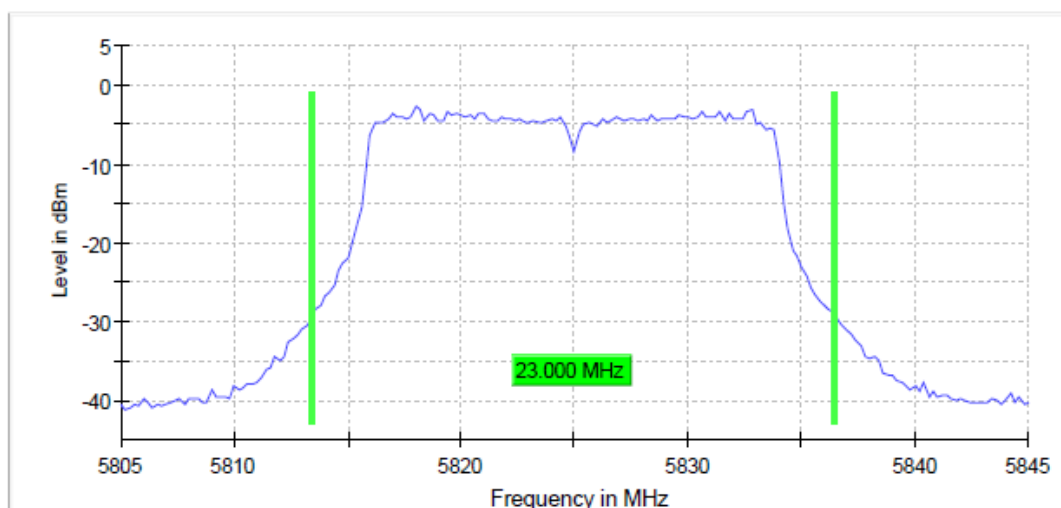

2.5.2. 40MHz Bandwidth

n-mode

Emission Bandwidth 26 dB (5190 MHz; 12,000 dBm; 40 MHz)


Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10

26 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5190.000000	44.800000	---	---	5167.600000	5212.400000

(continuation of the "26 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
5190.000000	-5.7	PASS

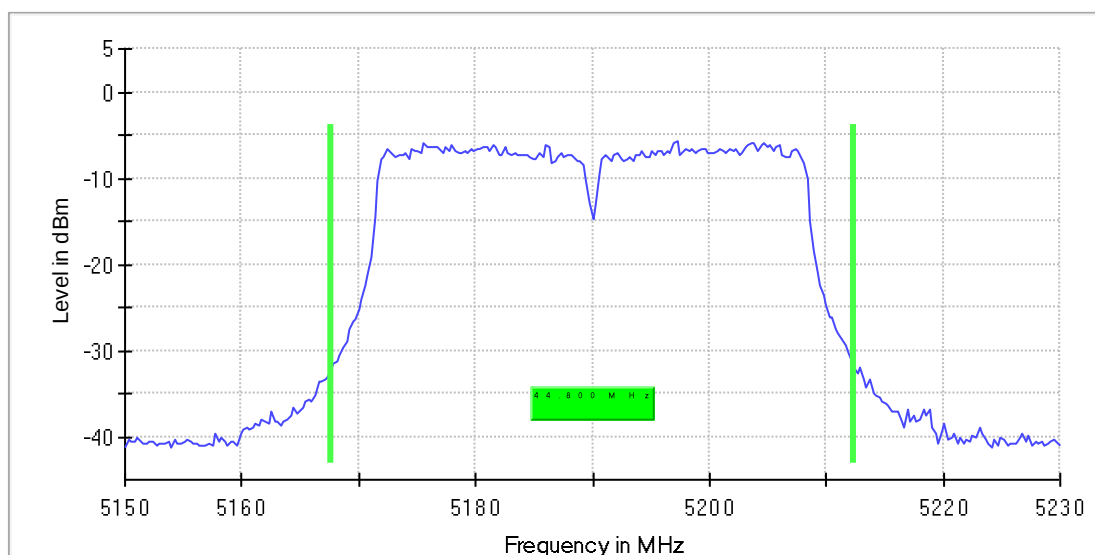

Emission Bandwidth 26 dB (5230 MHz; 12,000 dBm; 40 MHz)


Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10

26 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5230.000000	43.466667	---	---	5208.133333	5251.600000

(continuation of the "26 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
5230.000000	-4.4	PASS

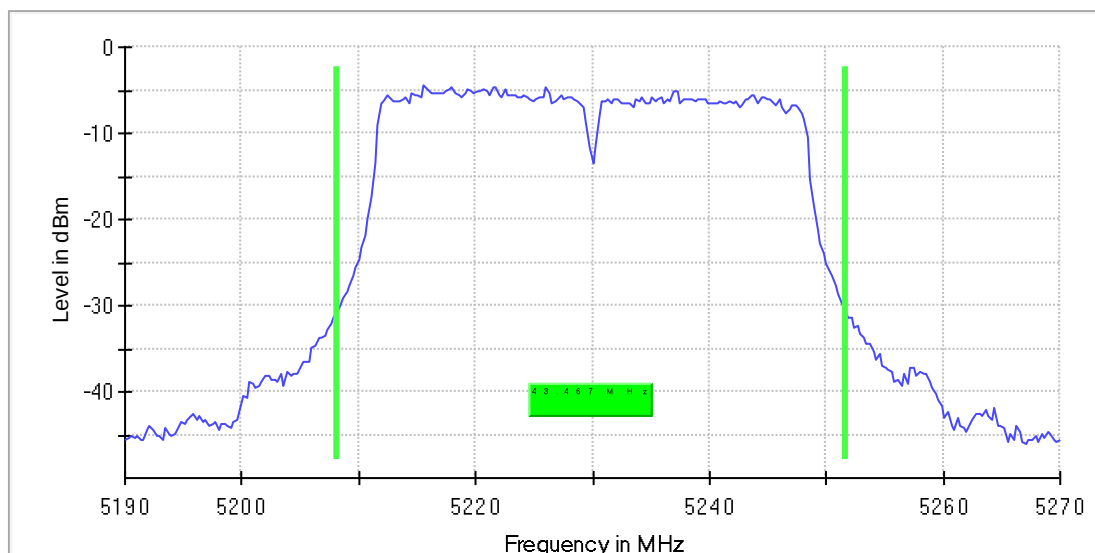

Emission Bandwidth 26 dB (5270 MHz; 12,000 dBm; 40 MHz)


Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10

26 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5270.000000	44.000000	---	---	5248.133333	5292.133333

(continuation of the "26 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
5270.000000	-5.0	PASS

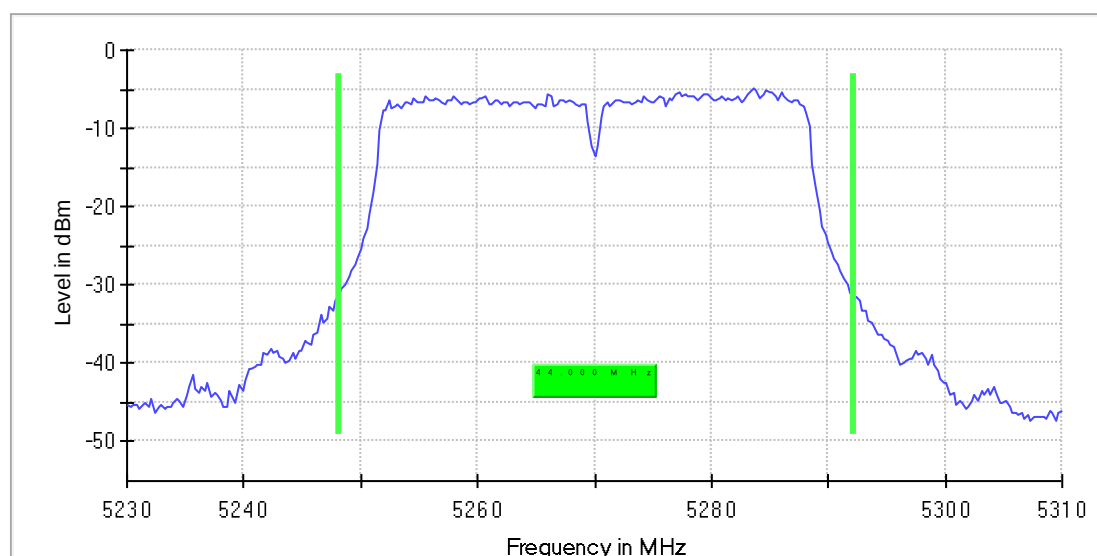

Emission Bandwidth 26 dB (5310 MHz; 12,000 dBm; 40 MHz)


Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10

26 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5310.000000	44.266667	---	---	5287.600000	5331.866667

(continuation of the "26 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
5310.000000	-5.0	PASS

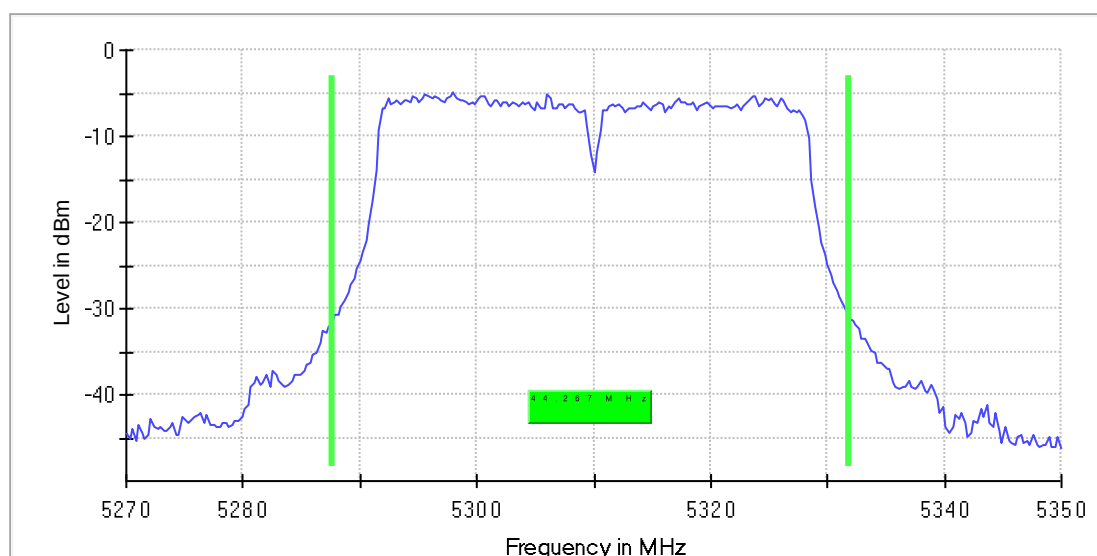

Emission Bandwidth 26 dB (5510 MHz; 12,000 dBm; 40 MHz)


Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10

26 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5510.000000	44.800000	---	---	5487.866667	5532.666667

(continuation of the "26 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
5510.000000	-4.9	PASS

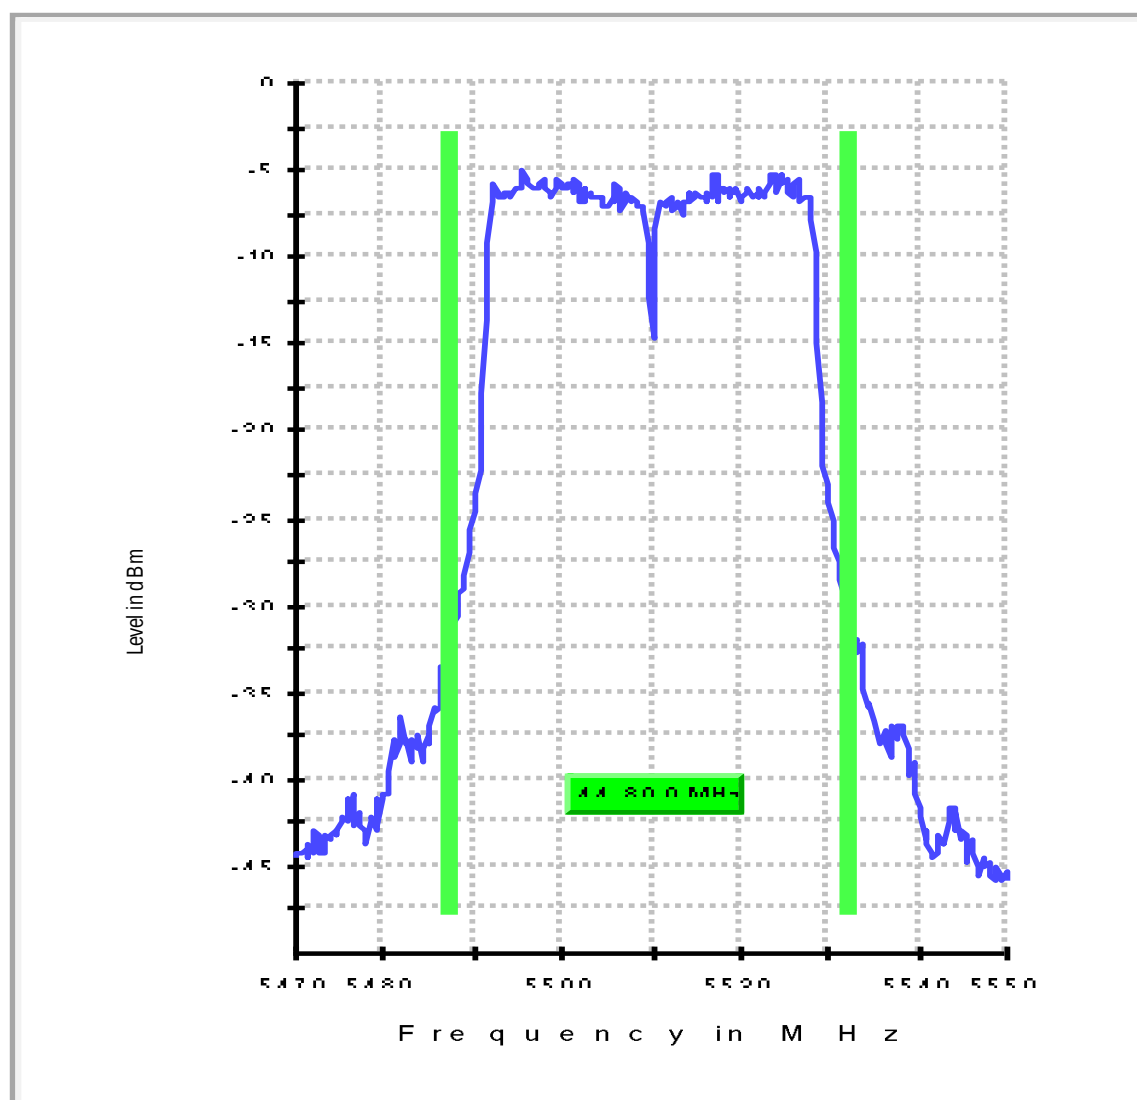

Emission Bandwidth 26 dB (5550 MHz; 12,000 dBm; 40 MHz)


Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10

26 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5550.000000	44.000000	---	---	5527.866667	5571.866667

(continuation of the "26 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
5550.000000	-4.8	PASS

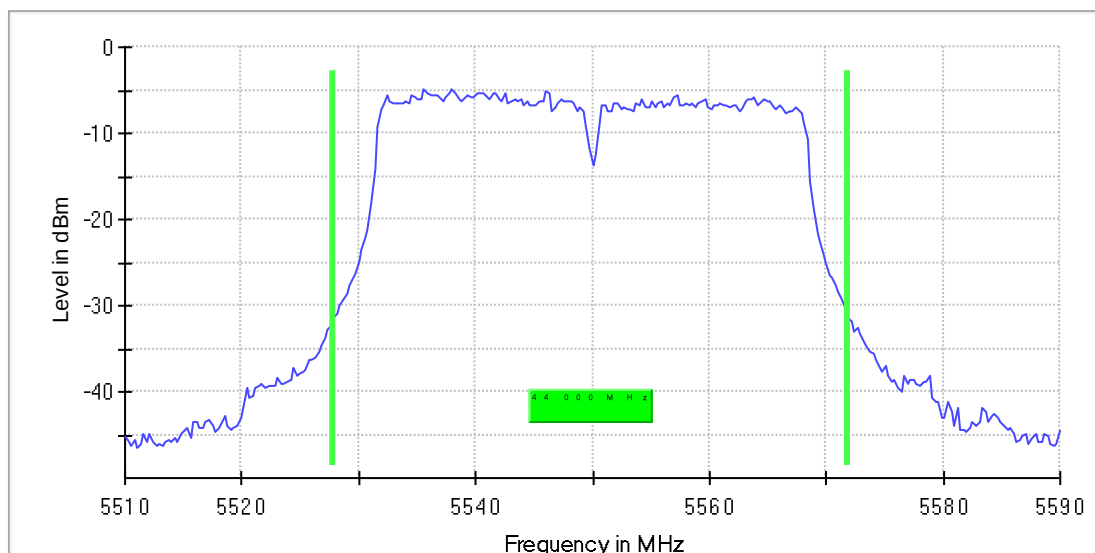

Emission Bandwidth 26 dB (5670 MHz; 12,000 dBm; 40 MHz)


Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10

26 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5670.000000	43.466667	---	---	5648.133333	5691.600000

(continuation of the "26 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
5670.000000	-3.8	PASS

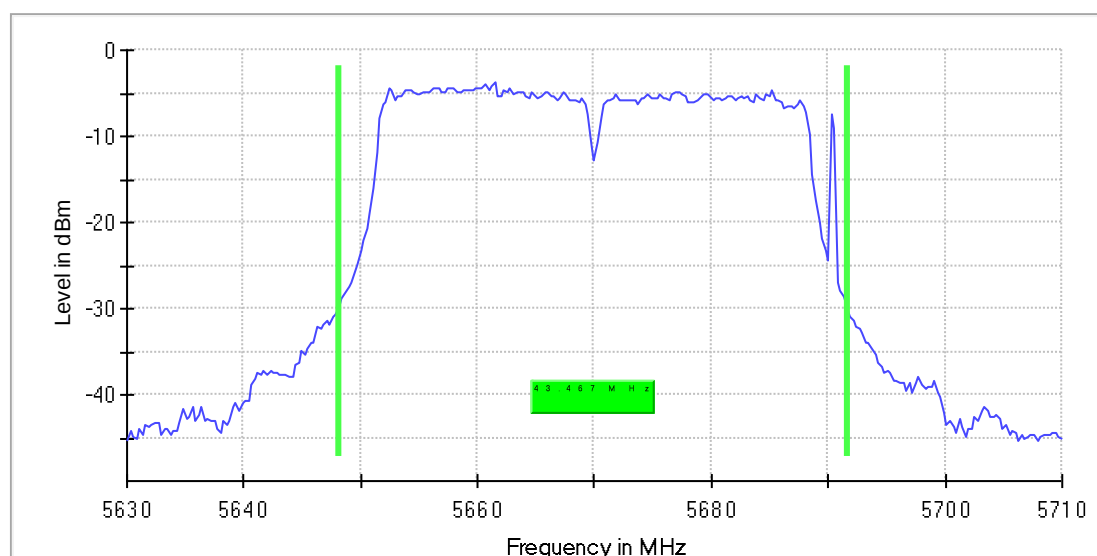

Emission Bandwidth 26 dB (5755 MHz; 12,000 dBm; 40 MHz)


Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10

26 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5755.000000	44.533333	---	---	5732.600000	5777.133333

(continuation of the "26 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
5755.000000	-3.6	PASS

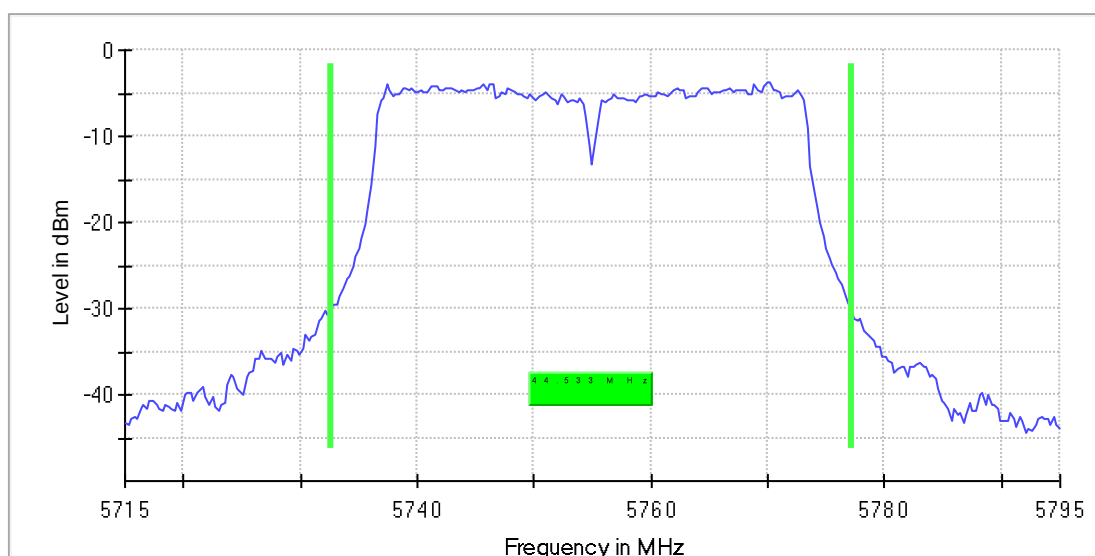

Emission Bandwidth 26 dB (5795 MHz; 12,000 dBm; 40 MHz)


Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10

26 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5795.000000	43.466667	---	---	5773.133333	5816.600000

(continuation of the "26 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
5795.000000	-3.5	PASS

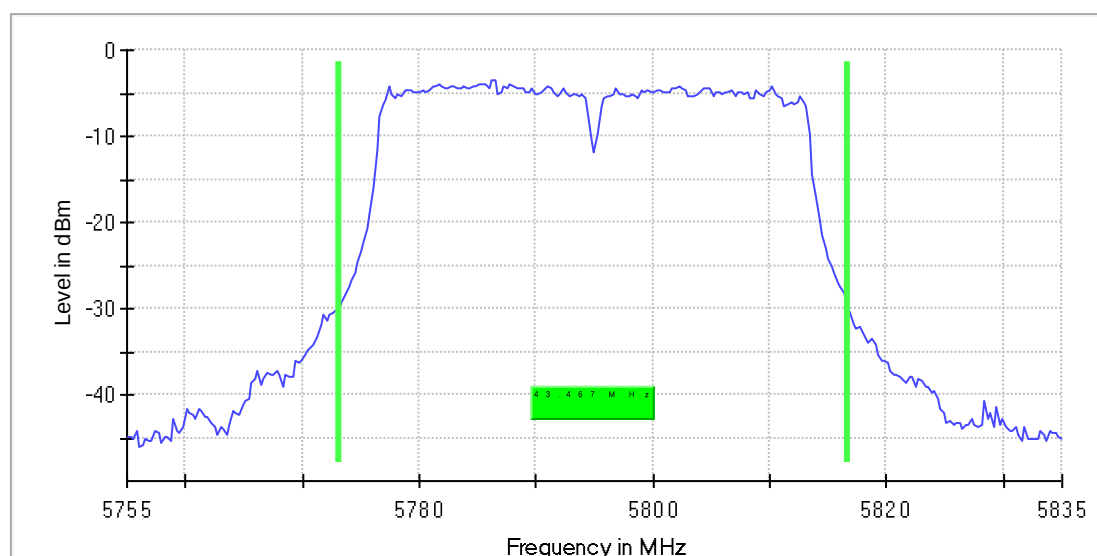

ac-mode

Emission Bandwidth 26 dB (5190 MHz; 12,000 dBm; 40 MHz)


Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10

26 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5190.000000	45.866666	---	---	5167.066667	5212.933333

(continuation of the "26 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
5190.000000	-6.1	PASS

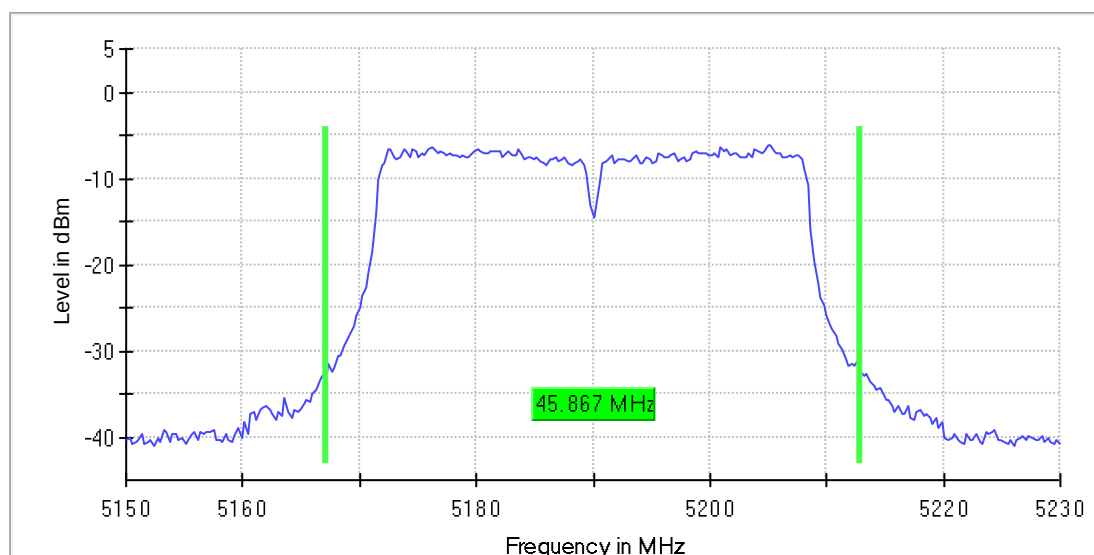

Emission Bandwidth 26 dB (5230 MHz; 12,000 dBm; 40 MHz)


Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10

26 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5230.000000	43.466667	---	---	5208.133333	5251.600000

(continuation of the "26 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
5230.000000	-5.3	PASS

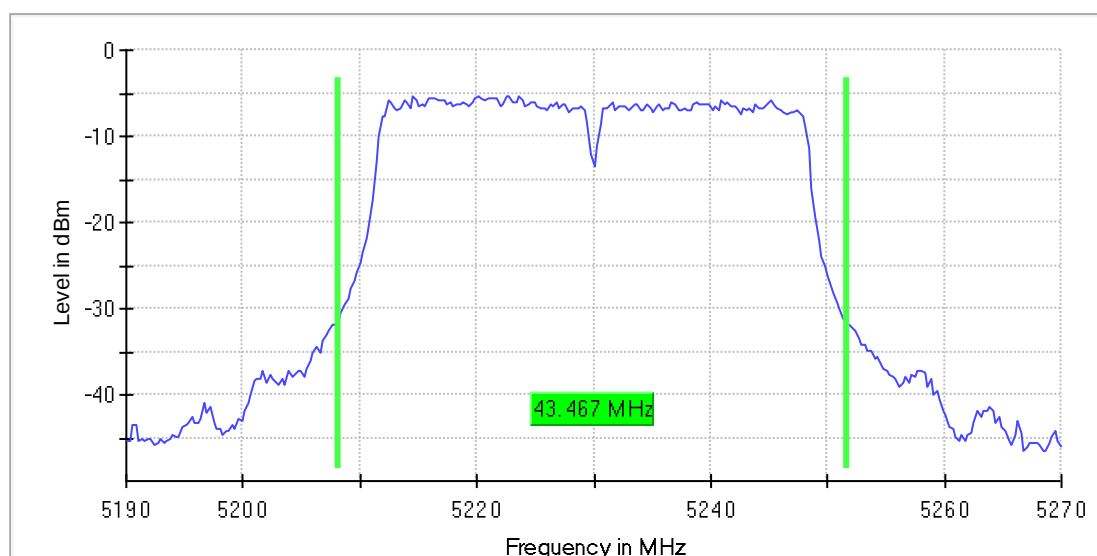

Emission Bandwidth 26 dB (5270 MHz; 12,000 dBm; 40 MHz)


Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10

26 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5270.000000	44.000000	---	---	5247.866667	5291.866667

(continuation of the "26 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
5270.000000	-5.1	PASS

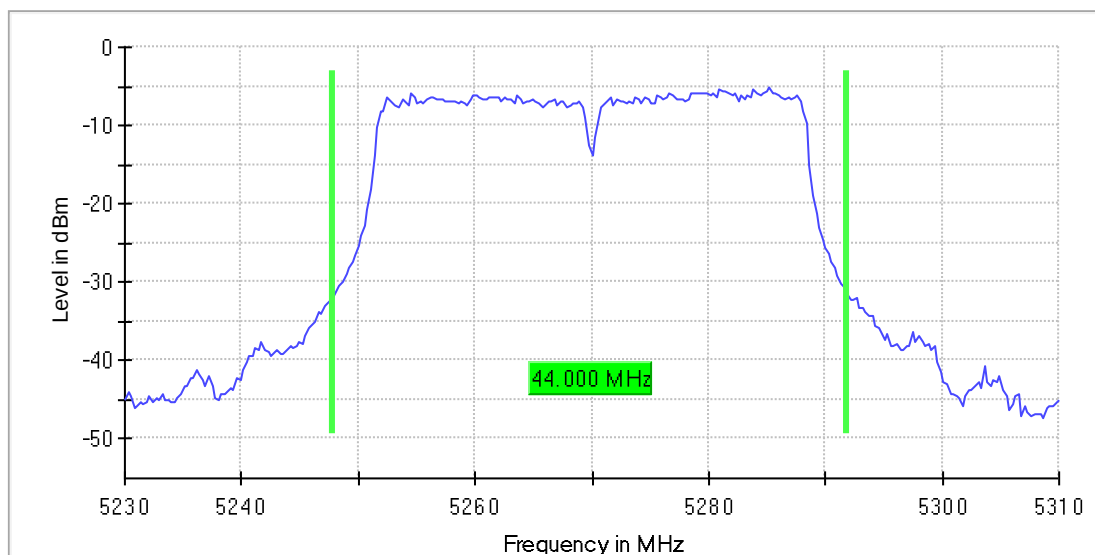

Emission Bandwidth 26 dB (5310 MHz; 12,000 dBm; 40 MHz)


Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10

26 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5310.000000	49.066666	---	---	5287.866667	5336.933333

(continuation of the "26 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
5310.000000	-4.6	PASS

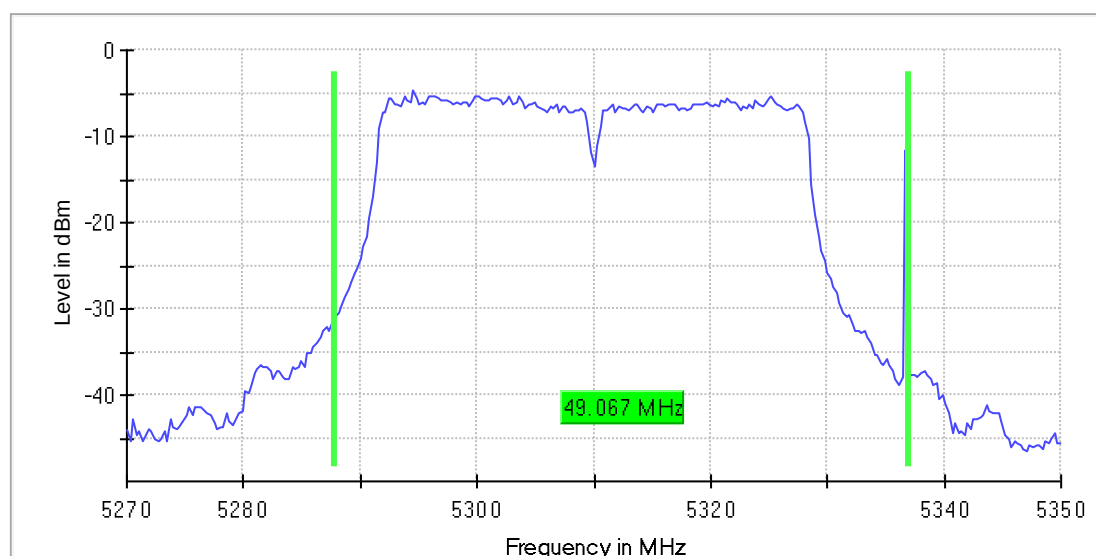

Emission Bandwidth 26 dB (5510 MHz; 12,000 dBm; 40 MHz)


Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10

26 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5510.000000	45.066667	---	---	5487.600000	5532.666667

(continuation of the "26 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
5510.000000	-5.2	PASS

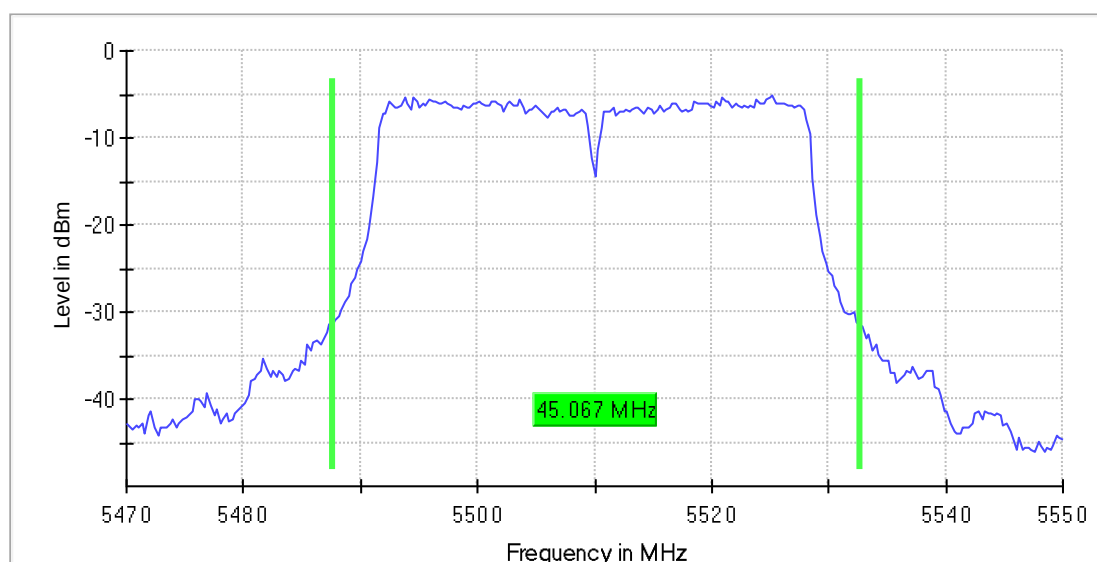

Emission Bandwidth 26 dB (5550 MHz; 12,000 dBm; 40 MHz)


Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10

26 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5550.000000	43.733333	---	---	5527.866667	5571.600000

(continuation of the "26 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
5550.000000	-5.1	PASS

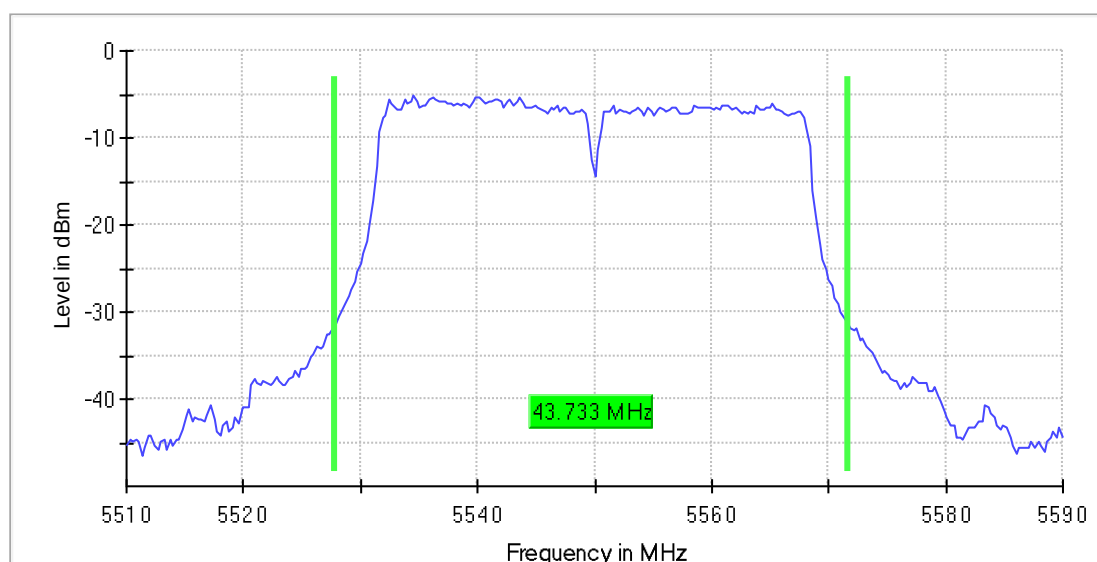

Emission Bandwidth 26 dB (5670 MHz; 12,000 dBm; 40 MHz)


Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10

26 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5670.000000	43.733333	---	---	5647.866667	5691.600000

(continuation of the "26 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
5670.000000	-3.7	PASS

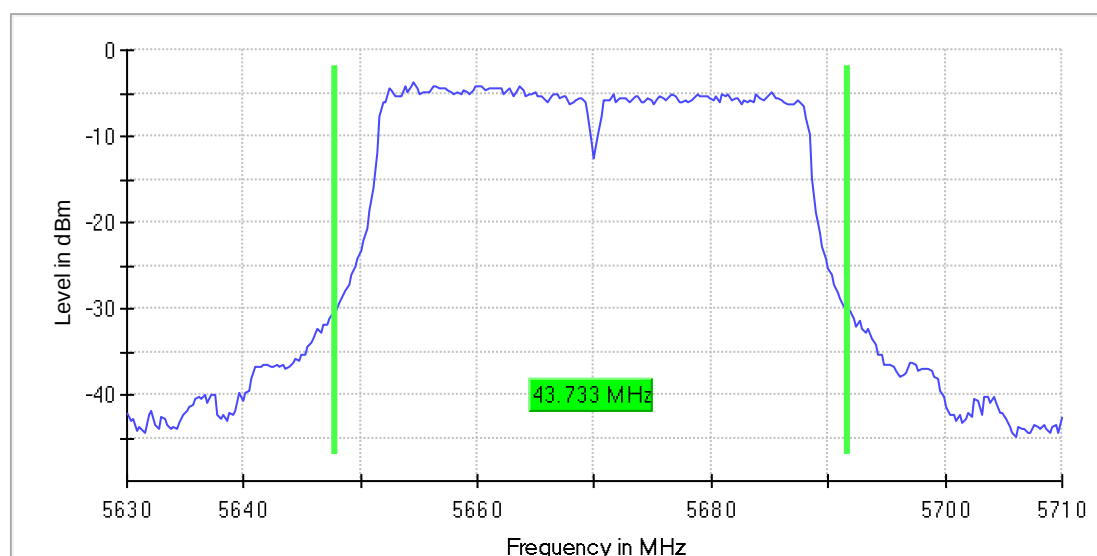

Emission Bandwidth 26 dB (5755 MHz; 12,000 dBm; 40 MHz)


Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10

26 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5755.000000	45.866667	---	---	5732.333333	5778.200000

(continuation of the "26 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
5755.000000	-4.0	PASS

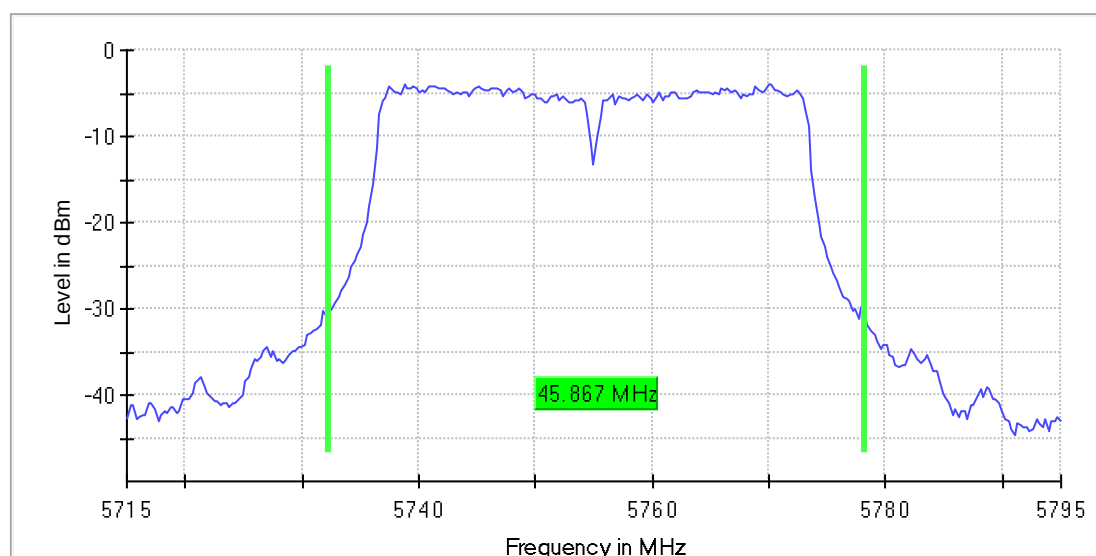

Emission Bandwidth 26 dB (5795 MHz; 12,000 dBm; 40 MHz)


Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10

26 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5795.000000	43.733333	---	---	5772.866667	5816.600000

(continuation of the "26 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
5795.000000	-3.6	PASS

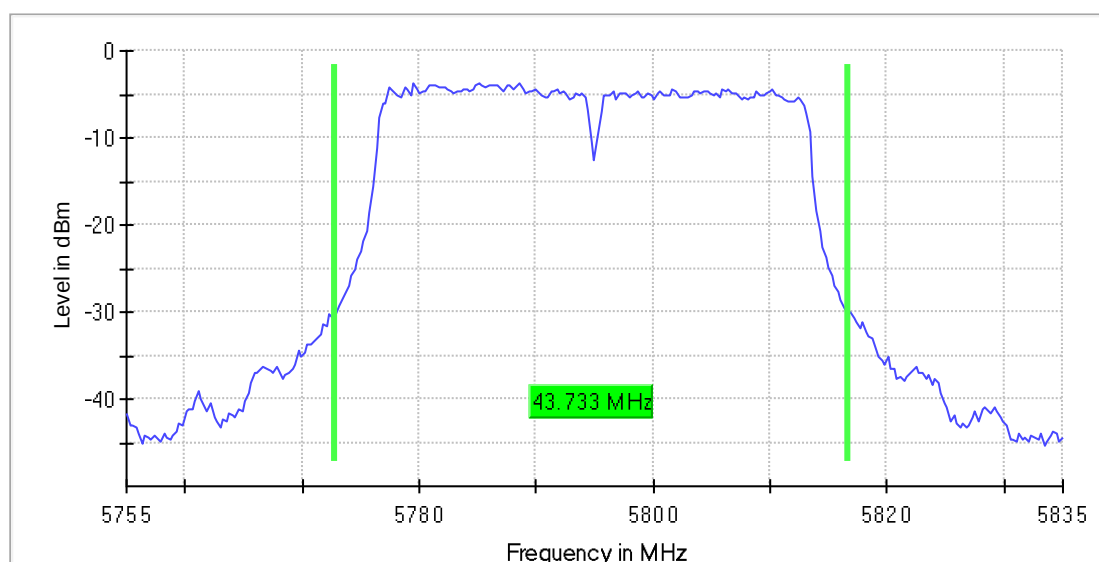

2.5.3. 80MHz Bandwidth

ac-mode

Emission Bandwidth 26 dB (5210 MHz; 12,000 dBm; 80 MHz)


Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10

26 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5210.000000	85.194806	---	---	5167.402597	5252.597403

(continuation of the "26 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
5210.000000	-0.5	PASS

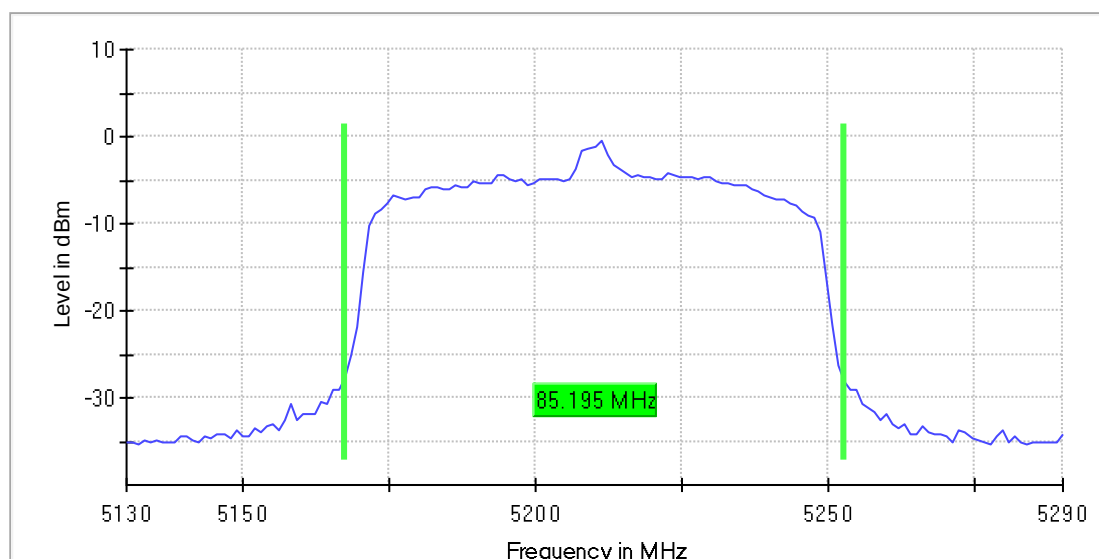

Emission Bandwidth 26 dB (5290 MHz; 12,000 dBm; 80 MHz)


Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10

26 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5290.000000	84.155845	---	---	5248.441558	5332.597403

(continuation of the "26 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
5290.000000	0.2	PASS

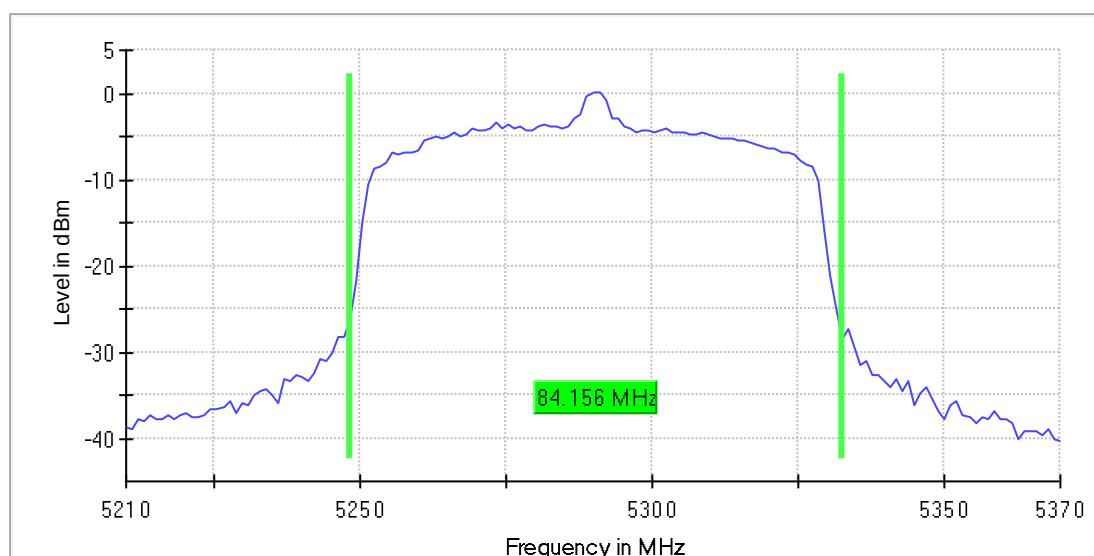

Emission Bandwidth 26 dB (5530 MHz; 12,000 dBm; 80 MHz)


Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10

26 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5530.000000	85.194806	---	---	5487.402597	5572.597403

(continuation of the "26 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
5530.000000	0.0	PASS

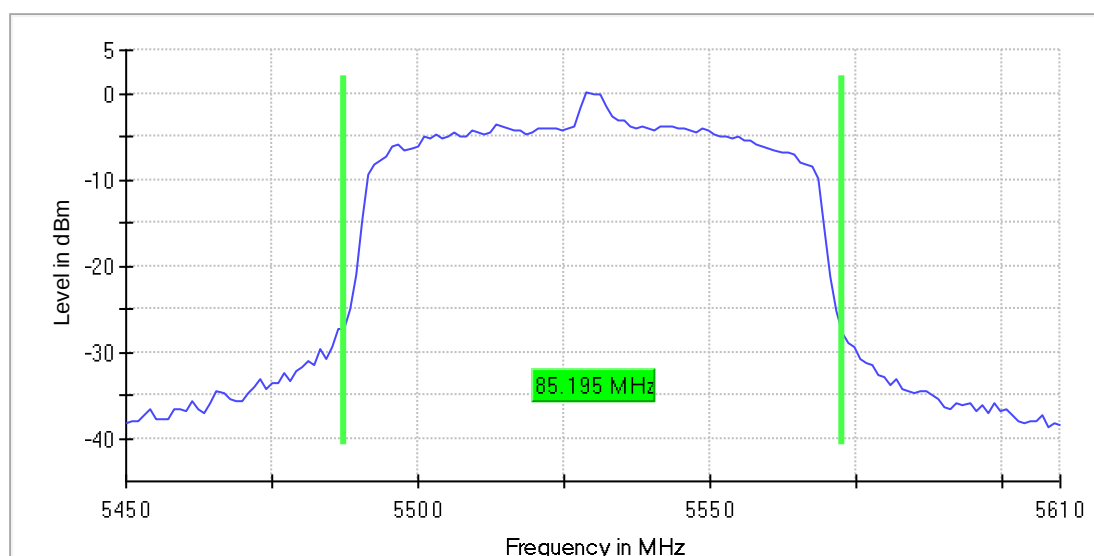

Emission Bandwidth 26 dB (5775 MHz; 12,000 dBm; 80 MHz)


Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v01r03 and ANSI C63.10

26 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5775.000000	85.194806	---	---	5732.402597	5817.597403

(continuation of the "26 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
5775.000000	1.5	PASS

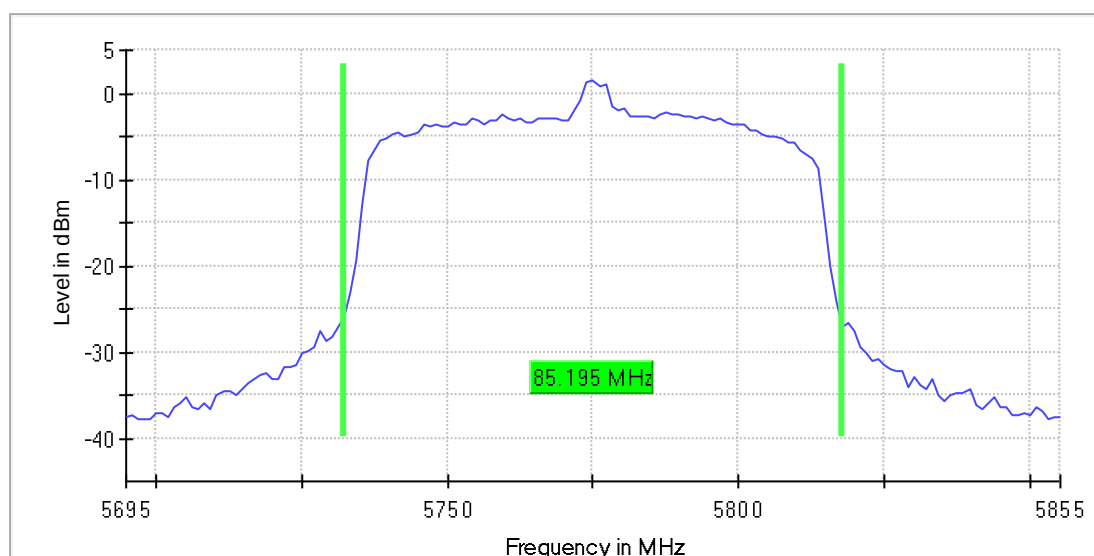

3. Radiated Measurements

3.1. Radiated magnetic field measurements below 30 MHz

3.1.1. 20 MHz Bandwidth

a-mode


2.01a_a-mode_18MBps_ch036

Test description:	Magnetic Field Strength Measurement related to 30/300 m distance
Test site and distance:	Ref.-Nr. 441 Semi Anechoic Room (SAR) with 3 m measurement distance
Version of Testsoftware:	EMC32 V9.25.0
Distance correction:	used accord. table, pls. see test report
Technical Data:	Please see page 2 for detailed data of measurement setup
Rec. antenna (pre-scan):	height 1.00 m, parallel and 90° to EUT polarisation
Used filter:	bypass
Test specification:	FCC 15.205 § 15.209; RSS-Gen: Issue 4
Operator:	MKh
Operating conditions:	TX-on
Power during tests:	12V DC, 110V/60Hz, full loaded batteries
Comment 1:	Channel low/middle/high
Comment 2:	a-mode 18MBps ch036

EUT Information

EUT Name:	Thermomix
Manufacturer:	Vorwerk Elektroware GmbH & Co KG.
Serial Number:	18434212024100415
Hardware Rev:	NWOT
Software Rev:	0.18.109-201808300615
Comment:	120V AC

Full Spectrum

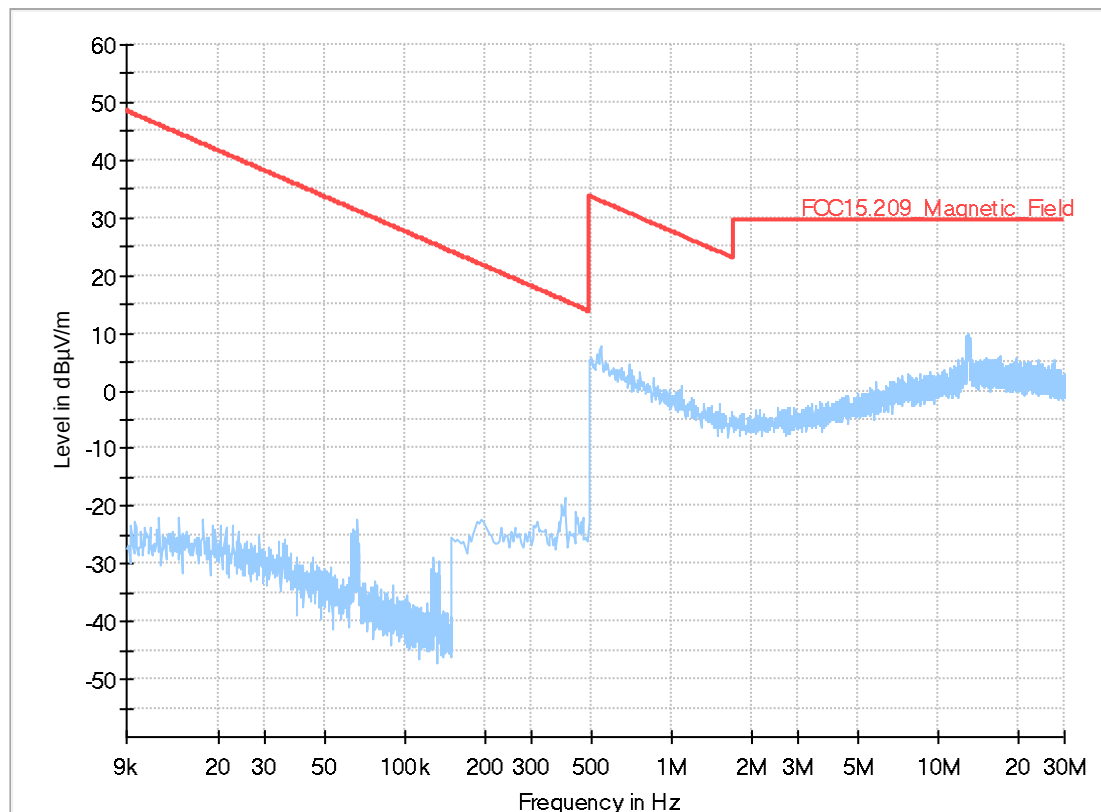


2.02a_a-mode_18MBps_ch064

Test description:	Magnetic Field Strength Measurement related to 30/300 m distance
Test site and distance:	Ref.-Nr. 441 Semi Anechoic Room (SAR) with 3 m measurement distance
Version of Testsoftware:	EMC32 V9.25.0
Distance correction:	used accord. table, pls. see test report
Technical Data:	Please see page 2 for detailed data of measurement setup
Rec. antenna (pre-scan):	height 1.00 m, parallel and 90° to EUT polarisation
Used filter:	bypass
Test specification:	FCC 15.205 § 15.209; RSS-Gen: Issue 4
Operator:	MKh
Operating conditions:	TX-on
Power during tests:	12V DC, 110V/60Hz, full loaded batteries
Comment 1:	Channel low/middle/high
Comment 2:	a-mode 18MBps ch064

EUT Information

EUT Name:	thermomix
Manufacturer:	Vorwerk Elektroware GmbH & Co KG.
Serial Number:	18434212024100415
Hardware Rev:	NWOT
Software Rev:	0.18.109-201808300615
Comment:	120V AC

Full Spectrum

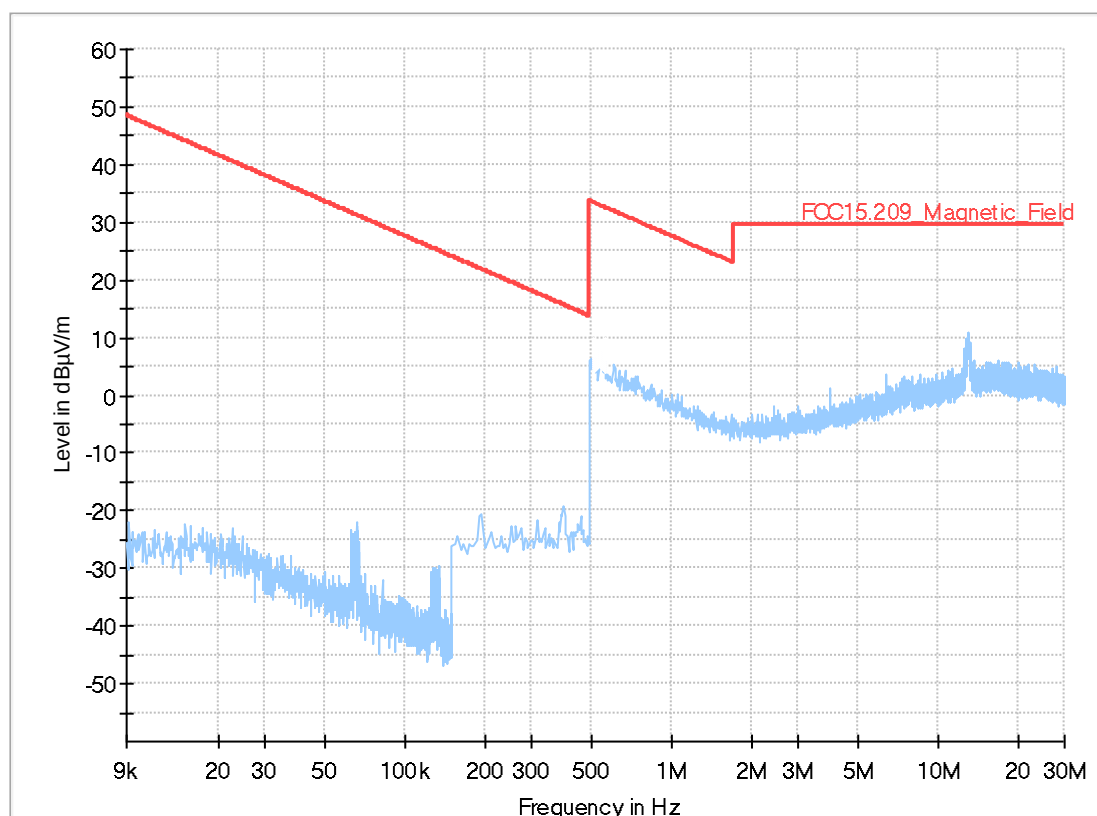


2.03a_a-mode_18MBps_ch100

Test description:	Magnetic Field Strength Measurement related to 30/300 m distance
Test site and distance:	Ref.-Nr. 441 Semi Anechoic Room (SAR) with 3 m measurement distance
Version of Testsoftware:	EMC32 V9.25.0
Distance correction:	used accord. table, pls. see test report
Technical Data:	Please see page 2 for detailed data of measurement setup
Rec. antenna (pre-scan):	height 1.00 m, parallel and 90° to EUT polarisation
Used filter:	bypass
Test specification:	FCC 15.205 § 15.209; RSS-Gen: Issue 4
Operator:	MKh
Operating conditions:	TX-on
Power during tests:	12V DC, 110V/60Hz, full loaded batteries
Comment 1:	Channel low/middle/high
Comment 2:	a-mode 18MBps ch100

EUT Information

EUT Name:	thermomix
Manufacturer:	Vorwerk Elektroware GmbH & Co KG.
Serial Number:	18434212024100415
Hardware Rev:	NWOT
Software Rev:	0.18.109-201808300615
Comment:	120V AC

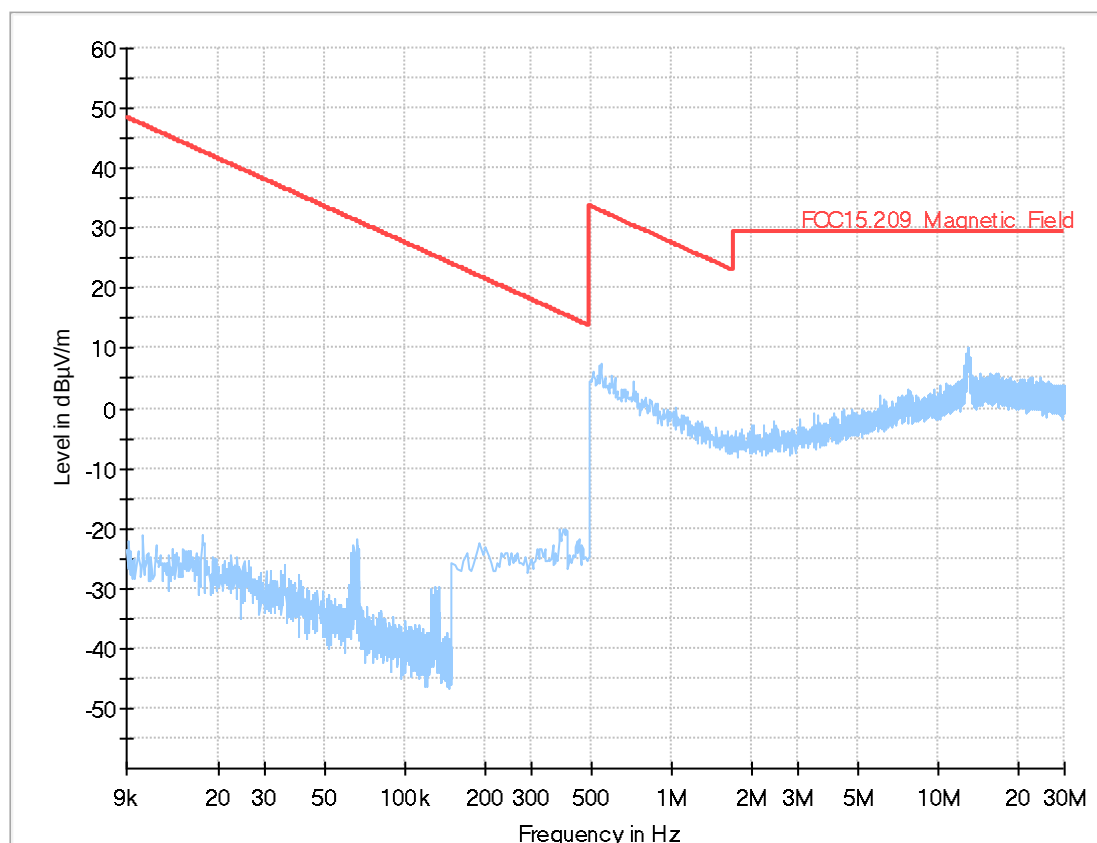


2.04a_a-mode_18MBps_ch149

Test description:	Magnetic Field Strength Measurement related to 30/300 m distance
Test site and distance:	Ref.-Nr. 441 Semi Anechoic Room (SAR) with 3 m measurement distance
Version of Testsoftware:	EMC32 V9.25.0
Distance correction:	used accord. table, pls. see test report
Technical Data:	Please see page 2 for detailed data of measurement setup
Rec. antenna (pre-scan):	height 1.00 m, parallel and 90° to EUT polarisation
Used filter:	bypass
Test specification:	FCC 15.205 § 15.209; RSS-Gen: Issue 4
Operator:	MKh
Operating conditions:	TX-on
Power during tests:	12V DC, 110V/60Hz, full loaded batteries
Comment 1:	Channel low/middle/high
Comment 2:	a-mode 18MBps ch149

EUT Information

EUT Name:	thermomix
Manufacturer:	Vorwerk Elektroware GmbH & Co KG.
Serial Number:	18434212024100415
Hardware Rev:	NWOT
Software Rev:	0.18.109-201808300615
Comment:	120V AC

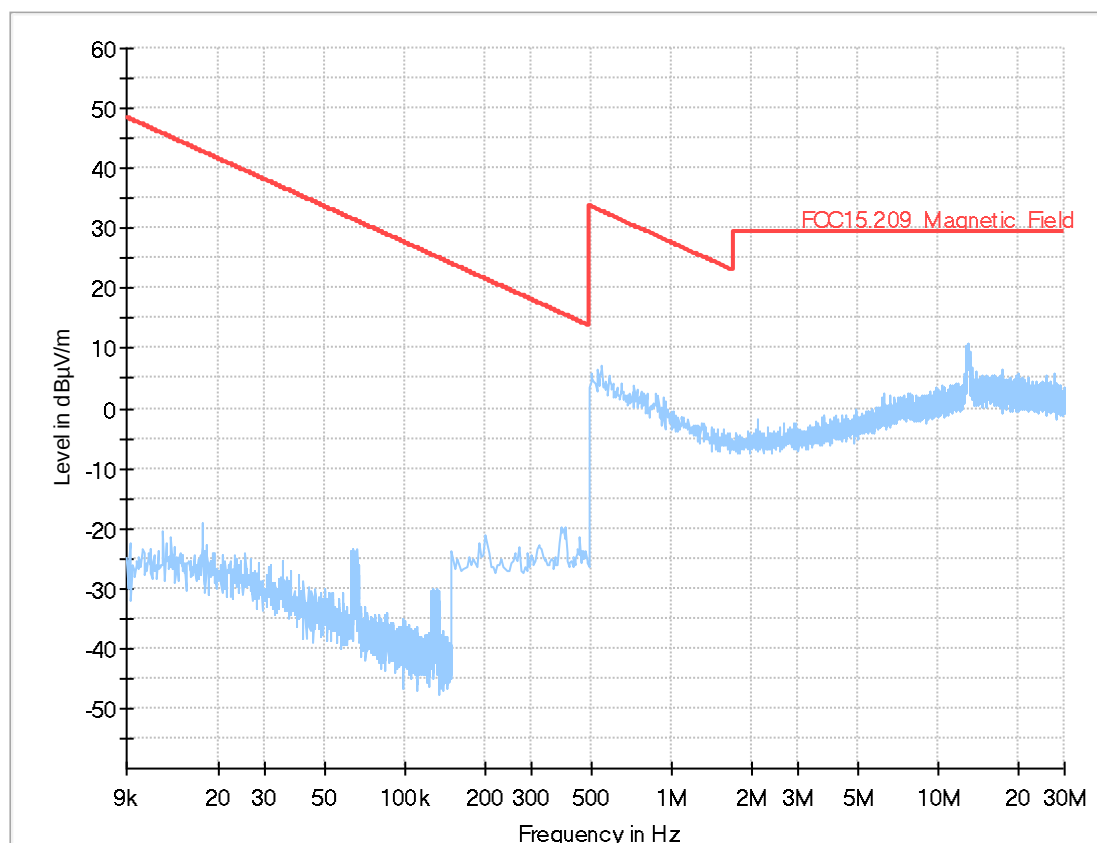

WLAN & Bluetooth simultaneous transmissions

2.05a_WLAN5+BT


Common Information

Test description:	Magnetic Field Strength Measurement related to 30/300 m distance
Test site and distance:	Ref.-Nr. 441 Semi Anechoic Room (SAR) with 3 m measurement distance
Version of Testsoftware:	EMC32 V9.25.0
Distance correction:	used accord. table, pls. see test report
Technical Data:	Please see page 2 for detailed data of measurement setup
Rec. antenna (pre-scan):	height 1.00 m, parallel and 90° to EUT polarisation
Used filter:	bypass
Test specification:	FCC 15.205 § 15.209; RSS-Gen: Issue 5
Operator:	Mah
Operating Mode:	BT_Normalmode + Wifi 5GHz Iperf
Comment 1:	nominal channel
Environmental Conditions::	Humidity : 42,1%rH; Temperature: 21,2°C

EUT Information

EUT Name:	Thermomix
Manufacturer:	Vorwerk Elektroware GmbH & Co KG.
Serial Number:	19094204681605368
Hardware Rev:	NWOT
Software Rev:	0.18.109-201808300615
Comment:	120V AC

Full Spectrum

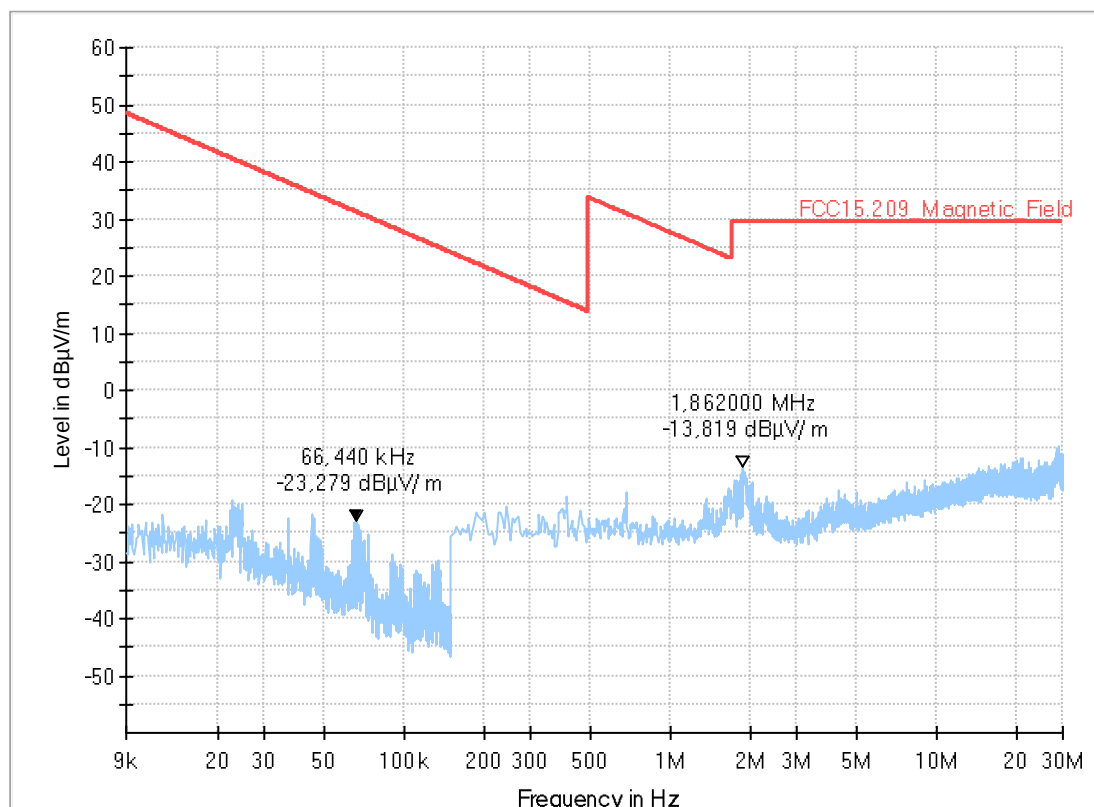

3.2. Radiated electric field measurement 30 MHz to 1 GHz

3.2.1. 20 MHz Bandwidth

a-mode


3.01a_a-mode_18Mbps_ch036

Test description:	Electric Field Strength Measurement
Test site and distance:	Ref.-Nr. 441 Semi Anechoic Room (SAR) with 3 m measurement distance
Version of Testsoftware:	EMC32 V9.25.0
Distance correction:	not used
Used filter:	not used
Technical Data:	please see page 2 for detailed data of measurement setup
Test specification.:	FCC 15.209; RSS-Gen: Issue 3
Operator:	SLo
Operating conditions:	a-mode 18Mbps ch036
Power during tests:	120V

EUT Information

Manufacturer:	Vorwerk Elektroware GmbH + Co. KG
Model:	thermomix
Type:	Household equipment with WLAN
HW:	NWOT
SW:	0.18.109-201808300615
Serial Nr.:	18434212024100415
Power Supply:	120V AC

Full Spectrum

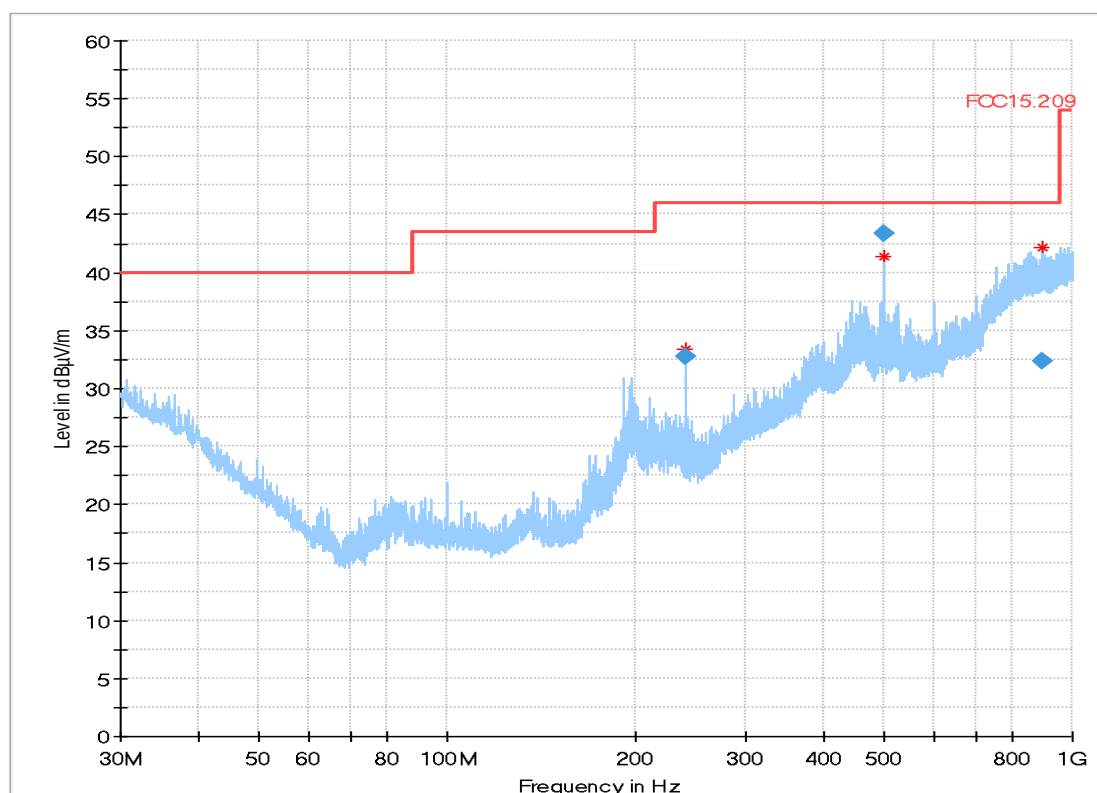

Final Result

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Elevation (deg)	Correction (dB)
239.880000	32.73	46.00	13.27	1000.0	120.000	125.0	H	8.0	0.0	13.1
499.936000	43.36	46.00	2.64	1000.0	120.000	161.0	H	-7.0	0.0	19.5
895.452000	32.32	46.00	13.68	1000.0	120.000	298.0	V	202.0	0.0	26.8


3.02a_a-mode_18Mbps_ch064

Test description:	Electric Field Strength Measurement
Test site and distance:	Ref.-Nr. 441 Semi Anechoic Room (SAR) with 3 m measurement distance
Version of Testsoftware:	EMC32 V9.25.0
Distance correction:	not used
Used filter:	not used
Technical Data:	please see page 2 for detailed data of measurement setup
Test specification.:	FCC 15.209; RSS-Gen: Issue 3
Operator:	SLo
Operating conditions:	a-mode 18Mbps ch064
Power during tests:	120V

EUT Information

Manufacturer:	Vorwerk Elektroware GmbH + Co. KG
Model:	thermomix
Type:	Household equipment with WLAN
HW:	NWOT
SW:	0.18.109-201808300615
Serial Nr.:	18434212024100415
Power Supply:	120V AC

Full Spectrum

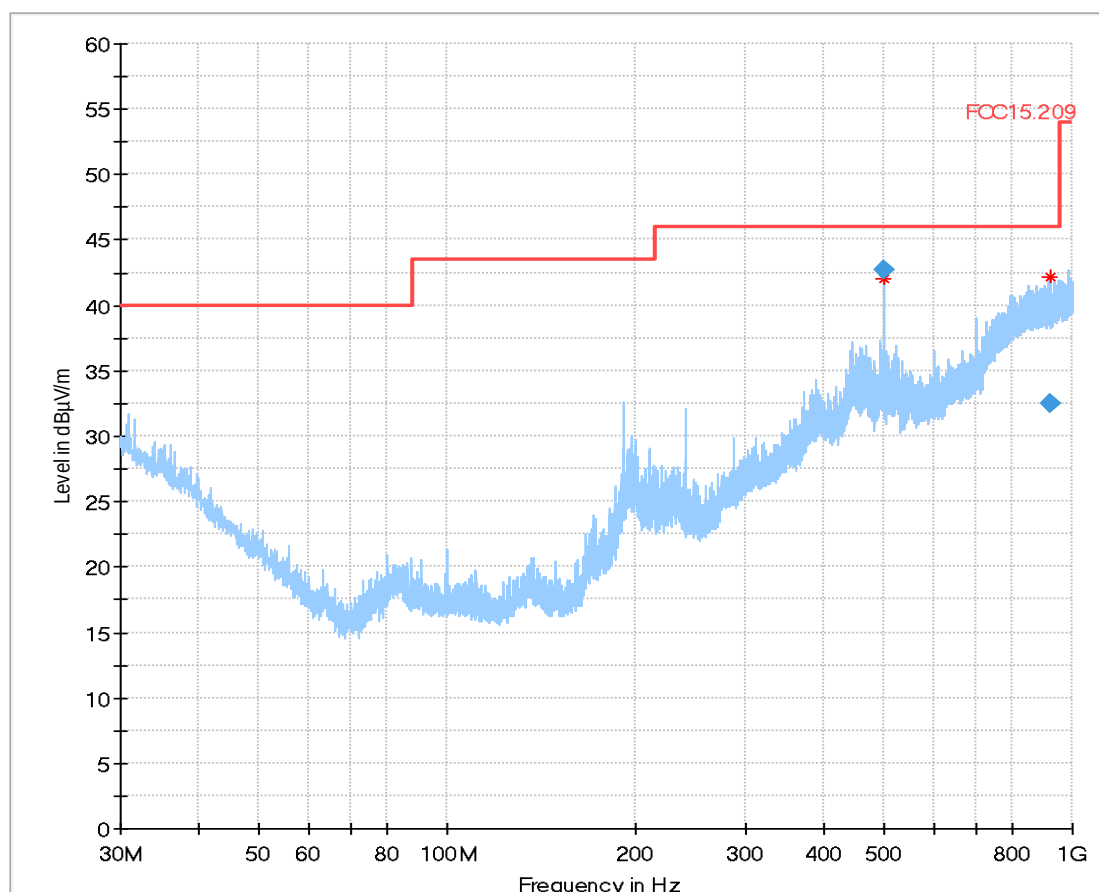

Final_Result

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Elevation (deg)	Correction (dB)
499.936000	42.66	46.00	3.34	1000.0	120.000	149.0	H	-9.0	0.0	19.5
925.288000	32.54	46.00	13.46	1000.0	120.000	316.0	V	257.0	0.0	27.1


3.03a_a-mode_18MBps_ch100

Test description: Electric Field Strength Measurement
 Test site and distance: Ref.-Nr. 441 Semi Anechoic Room (SAR) with 3 m measurement distance
 Version of Testsoftware: EMC32 V9.25.0
 Distance correction: not used
 Used filter: not used
 Technical Data: please see page 2 for detailed data of measurement setup
 Test specification.: FCC 15.209; RSS-Gen: Issue 3
 Operator: HEI
 Operating conditions: a-mode | 18MBps | ch100
 Power during tests: 120V

EUT Information

Manufacturer: Vorwerk Elektroware GmbH + Co. KG
 Model: thermomix
 Type: Household equipment with WLAN
 HW: NWOT
 SW: 0.18.109-201808300615
 Serial Nr.: 18434212024100415
 Power Supply: 120V AC

Full Spectrum

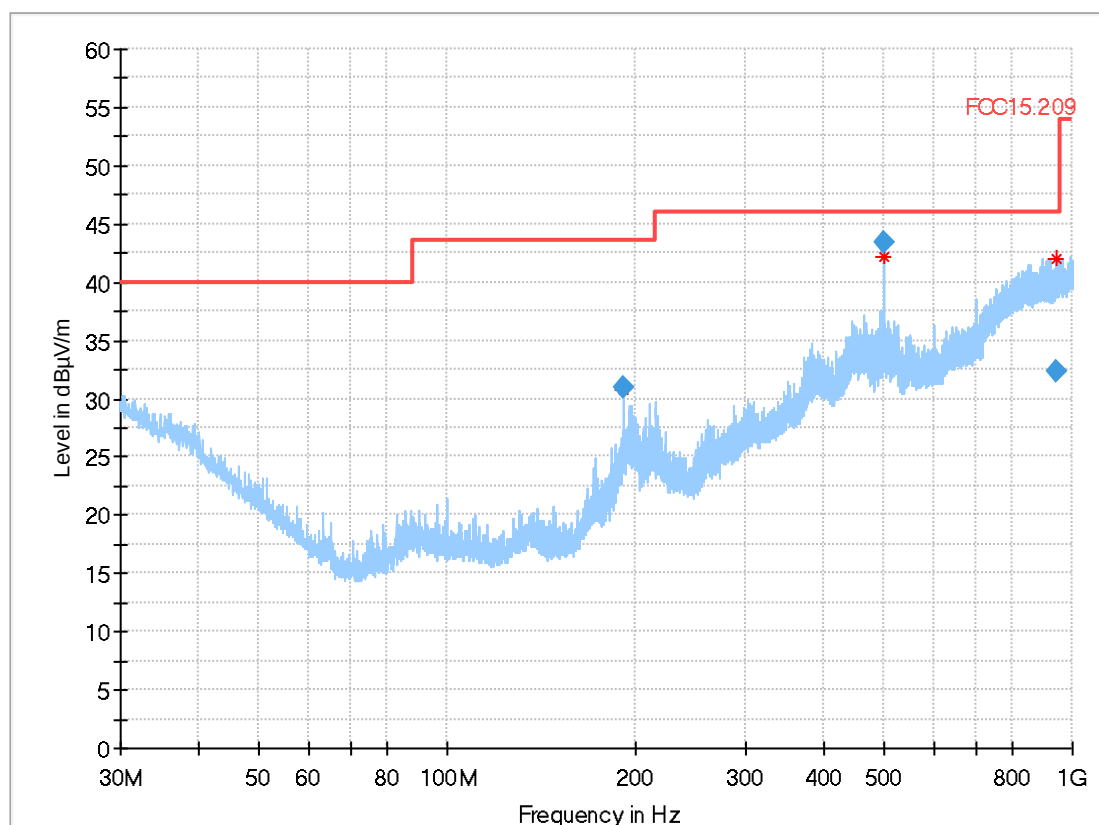

Final Result

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Elevation (deg)	Correction (dB)
191.896000	30.87	43.50	12.63	1000.0	120.000	154.0	H	-8.0	0.0	11.5
499.936000	43.34	46.00	2.66	1000.0	120.000	160.0	H	-10.0	0.0	19.5
940.532000	32.29	46.00	13.71	1000.0	120.000	363.0	H	133.0	0.0	26.8

3.04a_a-mode_18MBps_ch149


Test description: Electric Field Strength Measurement
 Test site and distance: Ref.-Nr. 441 Semi Anechoic Room (SAR) with 3 m measurement distance
 Version of Testsoftware: EMC32 V9.25.0
 Distance correction: not used
 Used filter: not used
 Technical Data: please see page 2 for detailed data of measurement setup
 Test specification.: FCC 15.209; RSS-Gen: Issue 3

 Operator: Mkh
 Operating conditions: 3.04a_a-mode_18MBps_ch149
 Power during tests: 120V

EUT Information

Manufacturer: Vorwerk Elektroware GmbH + Co. KG
 Model: thermomix
 Type: Household equipment with WLAN
 HW: NWOT
 SW: 0.18.109-201808300615
 Serial Nr.: 18434212024100415
 Power Supply: 120V AC

Full Spectrum

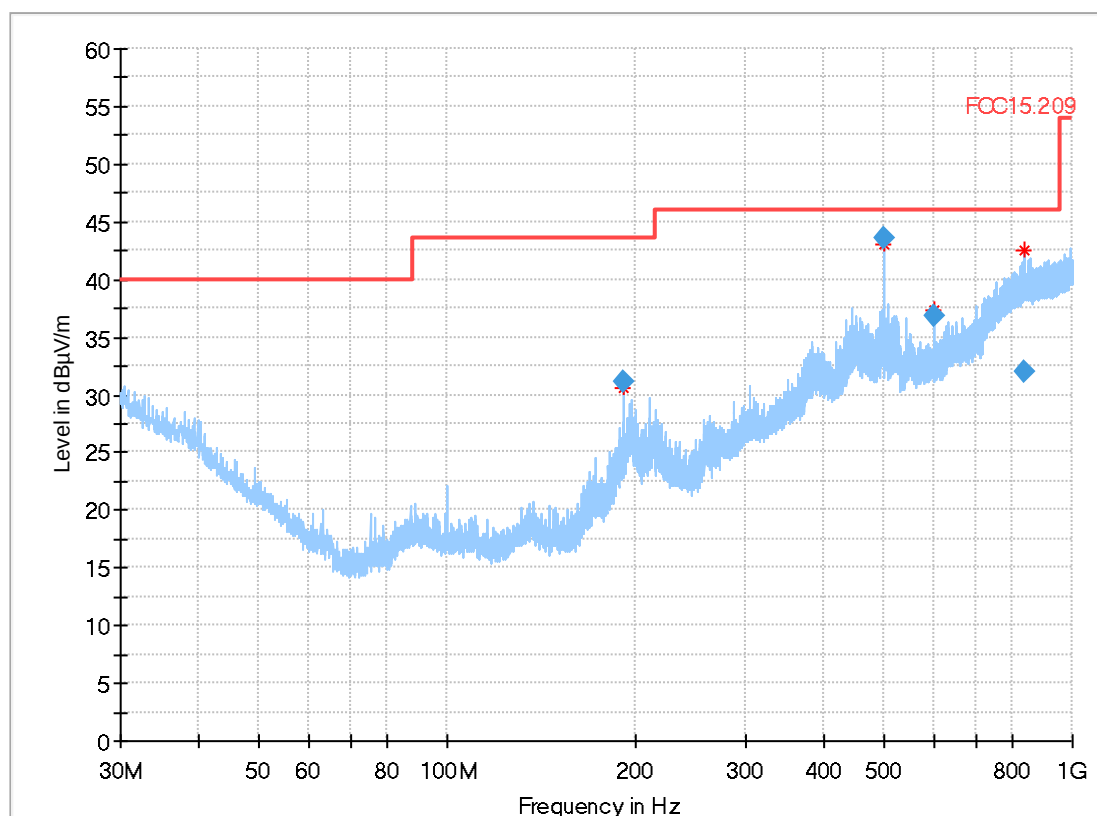

Final_Result

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Elevation (deg)	Corr. (dB)
191.908000	31.17	43.50	12.33	1000.0	120.000	179.0	H	159.0	0.0	11.5
499.936000	43.52	46.00	2.48	1000.0	120.000	157.0	H	-9.0	0.0	19.5
599.924000	36.85	46.00	9.15	1000.0	120.000	159.0	H	214.0	0.0	22.0
836.904000	32.03	46.00	13.97	1000.0	120.000	368.0	H	59.0	0.0	25.8

n-mode


3.05a_n-mode_MCS5_ch040

Test description:	Electric Field Strength Measurement
Test site and distance:	Ref.-Nr. 441 Semi Anechoic Room (SAR) with 3 m measurement distance
Version of Testsoftware:	EMC32 V9.25.0
Distance correction:	not used
Used filter:	not used
Technical Data:	please see page 2 for detailed data of measurement setup
Test specification.:	FCC 15.209; RSS-Gen: Issue 3
Operator:	HEI
Operating conditions:	n-mode HT20 MCS5 ch040
Power during tests:	120V

EUT Information

Manufacturer:	Vorwerk Elektroware GmbH + Co. KG
Model:	thermomix
Type:	Household equipment with WLAN
HW:	NWOT
SW:	0.18.109-201808300615
Serial Nr.:	18434212024100415
Power Supply:	120V AC

Full Spectrum

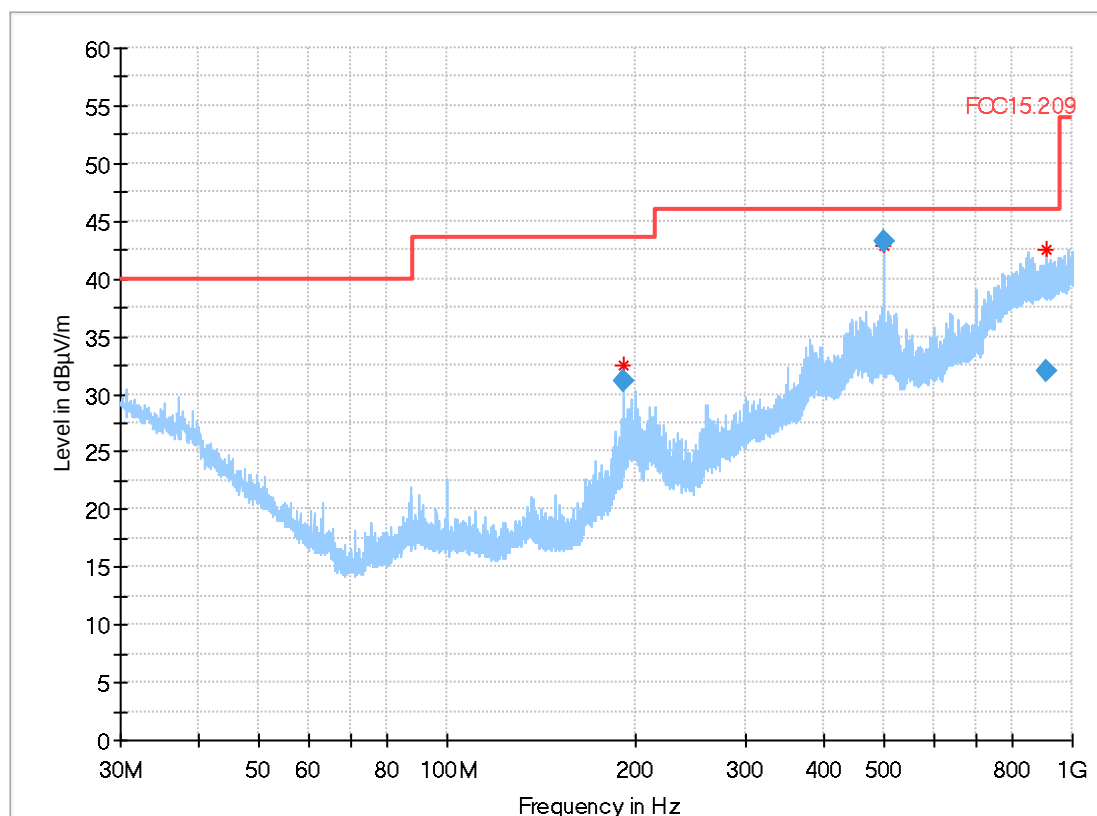

Final_Result

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Elevation (deg)	Corr. (dB)
191.876000	31.21	43.50	12.29	1000.0	120.000	170.0	H	168.0	0.0	11.5
499.936000	43.16	46.00	2.84	1000.0	120.000	175.0	H	-7.0	0.0	19.5
906.056000	31.94	46.00	14.06	1000.0	120.000	342.0	V	333.0	0.0	26.4


3.06a_n-mode_MCS5_ch52

Test description:	Electric Field Strength Measurement
Test site and distance:	Ref.-Nr. 441 Semi Anechoic Room (SAR) with 3 m measurement distance
Version of Testsoftware:	EMC32 V9.25.0
Distance correction:	not used
Used filter:	not used
Technical Data:	please see page 2 for detailed data of measurement setup
Test specification.:	FCC 15.209; RSS-Gen: Issue 3
Operator:	HEI
Operating conditions:	n-mode HT20 MCS5 ch052
Power during tests:	120V

EUT Information

Manufacturer:	Vorwerk Elektroware GmbH + Co. KG
Model:	thermomix
Type:	Household equipment with WLAN
HW:	NWOT
SW:	0.18.109-201808300615
Serial Nr.:	18434212024100415
Power Supply:	120V AC

Full Spectrum

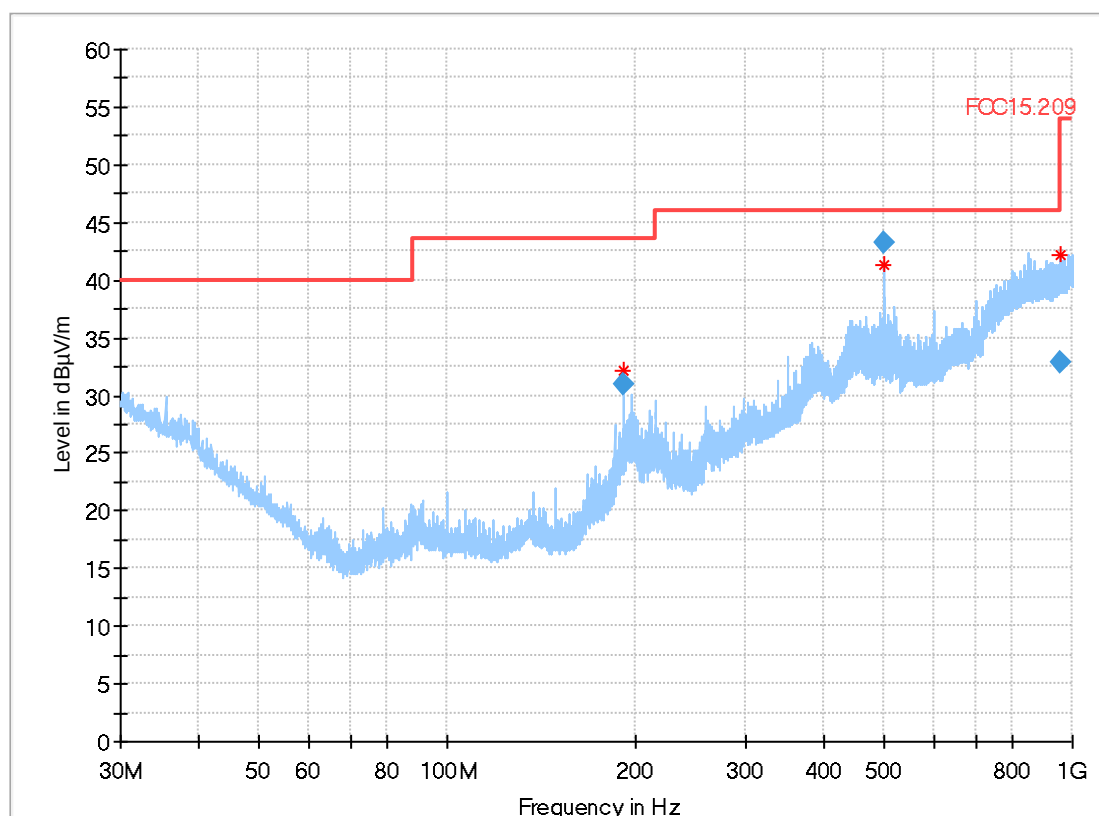

Final Result

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Elevation (deg)	Correction (dB)
191.908000	30.93	43.50	12.57	1000.0	120.000	187.0	H	166.0	0.0	11.5
499.936000	43.24	46.00	2.76	1000.0	120.000	154.0	H	0.0	0.0	19.5
955.468000	32.90	46.00	13.10	1000.0	120.000	368.0	H	0.0	0.0	27.4


3.07a_n-mode_MCS5_ch116

Test description: Electric Field Strength Measurement
 Test site and distance: Ref.-Nr. 441 Semi Anechoic Room (SAR) with 3 m measurement distance
 Version of Testsoftware: EMC32 V9.25.0
 Distance correction: not used
 Used filter: not used
 Technical Data: please see page 2 for detailed data of measurement setup
 Test specification.: FCC 15.209; RSS-Gen: Issue 3
 Operator: HEI
 Operating conditions: n-mode | HT20 || MCS5 | ch116
 Power during tests: 120V

EUT Information

Manufacturer: Vorwerk Elektroware GmbH + Co. KG
 Model: thermomix
 Type: Household equipment with WLAN
 HW: NWOT
 SW: 0.18.109-201808300615
 Serial Nr.: 18434212024100415
 Power Supply: 120V AC

Full Spectrum

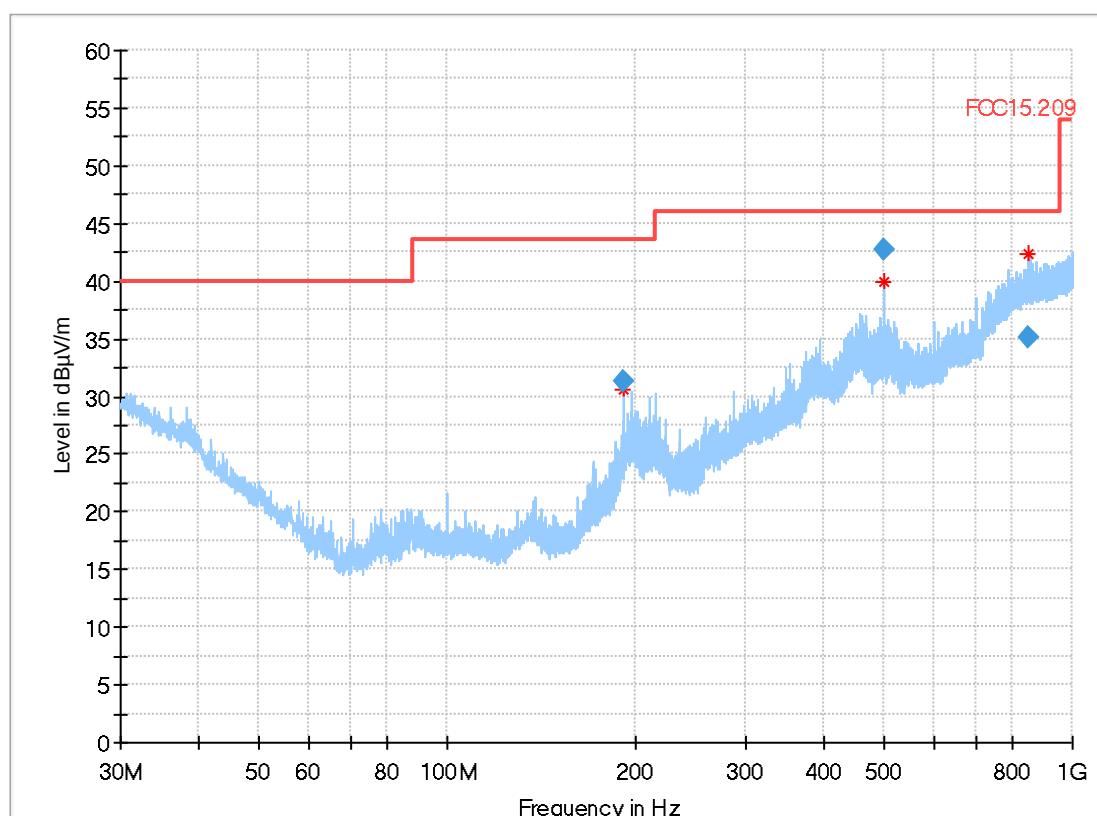

Final Result

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Elevation (deg)	Correction (dB)
191.900000	31.23	43.50	12.27	1000.0	120.000	150.0	H	0.0	0.0	11.5
499.936000	42.68	46.00	3.32	1000.0	120.000	162.0	H	2.0	0.0	19.5
851.028000	35.05	46.00	10.95	1000.0	120.000	109.0	H	181.0	0.0	25.7


3.08a_n-mode_MCS5_ch157

Test description:	Electric Field Strength Measurement
Test site and distance:	Ref.-Nr. 441 Semi Anechoic Room (SAR) with 3 m measurement distance
Version of Testsoftware:	EMC32 V9.25.0
Distance correction:	not used
Used filter:	not used
Technical Data:	please see page 2 for detailed data of measurement setup
Test specification.:	FCC 15.209; RSS-Gen: Issue 3
Operator:	HEI
Operating conditions:	n-mode HT20 MCS5 ch157
Power during tests:	120V

EUT Information

Manufacturer:	Vorwerk Elektroware GmbH + Co. KG
Model:	thermomix
Type:	Household equipment with WLAN
HW:	NWOT
SW:	0.18.109-201808300615
Serial Nr.:	18434212024100415
Power Supply:	120V AC

Full Spectrum

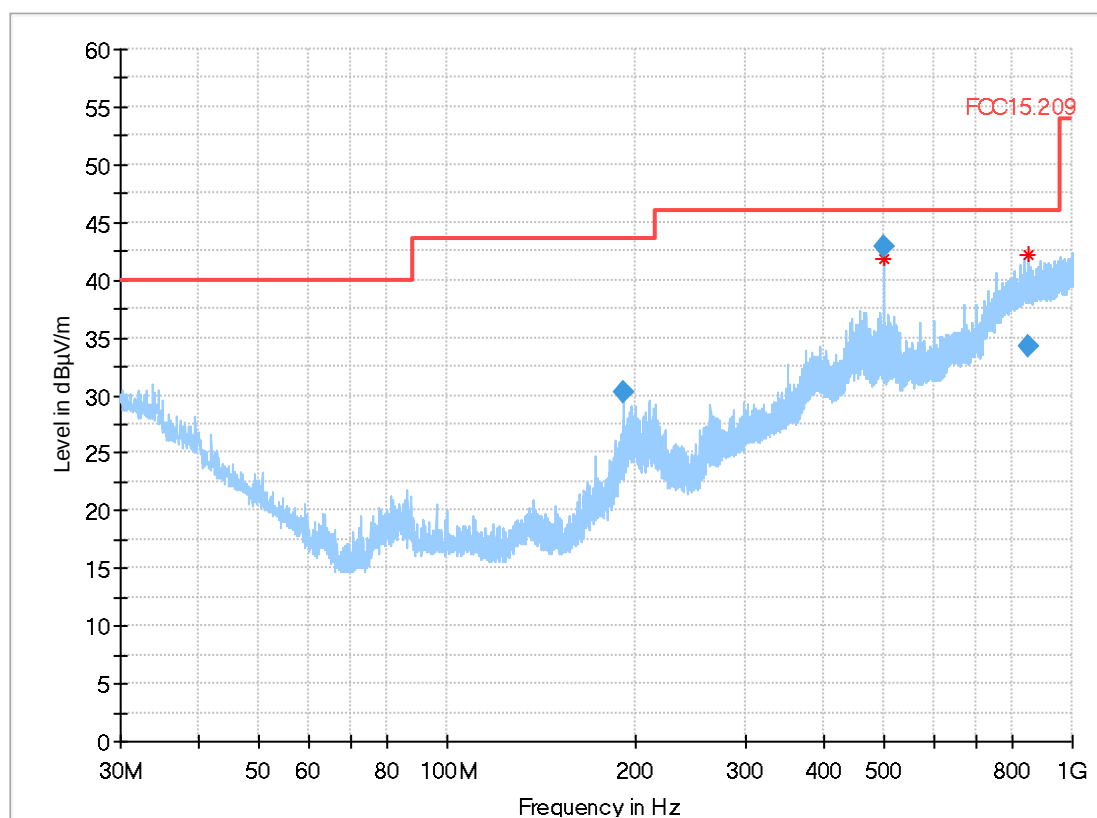

Final Result

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Elevation (deg)	Corr. (dB)
191.936000	30.26	43.50	13.24	1000.0	120.000	150.0	H	187.0	0.0	11.5
499.936000	42.88	46.00	3.12	1000.0	120.000	171.0	H	-10.0	0.0	19.5
851.040000	34.25	46.00	11.75	1000.0	120.000	195.0	H	324.0	0.0	25.7

ac-mode


3.09a_ac-mode_MCS5_ch048

Test description:	Electric Field Strength Measurement
Test site and distance:	Ref.-Nr. 441 Semi Anechoic Room (SAR) with 3 m measurement distance
Version of Testsoftware:	EMC32 V9.25.0
Distance correction:	not used
Used filter:	not used
Technical Data:	please see page 2 for detailed data of measurement setup
Test specification.:	FCC 15.209; RSS-Gen: Issue 3
Operator:	HEI
Operating conditions:	ac-mode HT20 MCS5 ch048
Power during tests:	120V

EUT Information

Manufacturer:	Vorwerk Elektroware GmbH + Co. KG
Model:	thermomix
Type:	Household equipment with WLAN
HW:	NWOT
SW:	0.18.109-201808300615
Serial Nr.:	18434212024100415
Power Supply:	120V AC

Full Spectrum

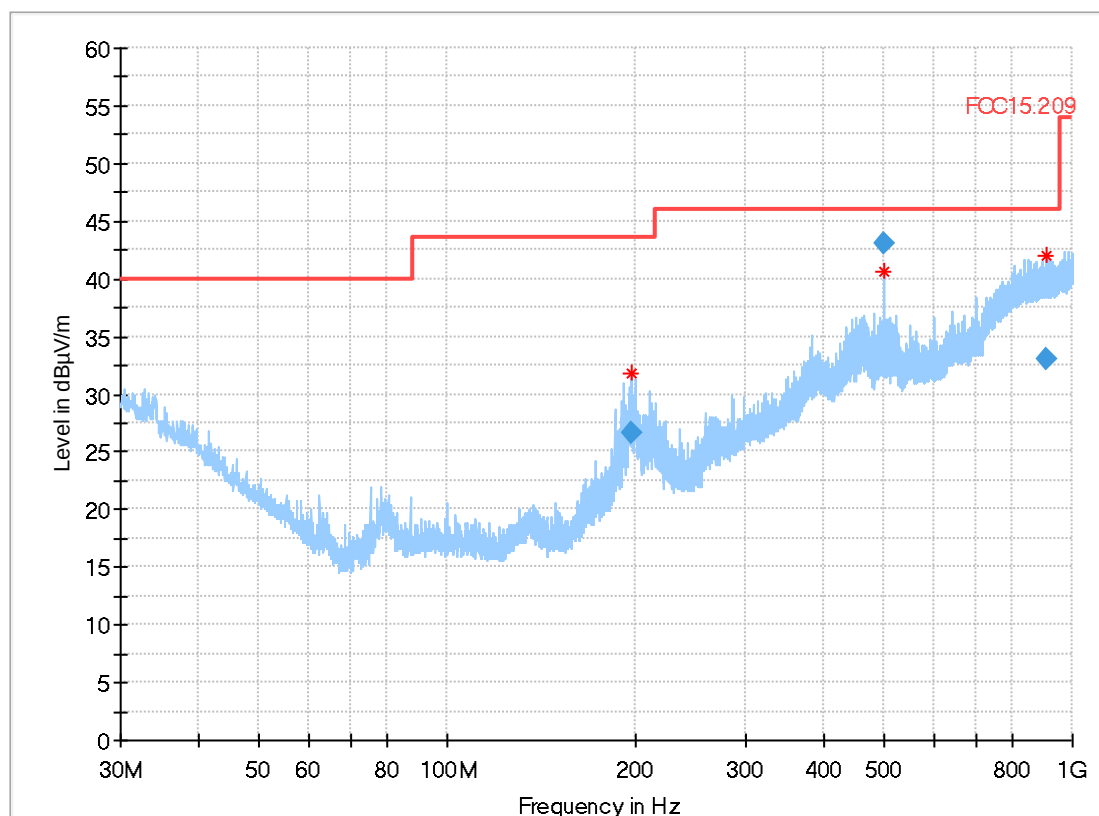

Final_Result

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Elevation (deg)	Corr. (dB)
197.084000	26.64	43.50	16.86	1000.0	120.000	169.0	H	334.0	0.0	11.4
499.936000	43.08	46.00	2.92	1000.0	120.000	158.0	H	4.0	0.0	19.5
910.208000	33.00	46.00	13.00	1000.0	120.000	105.0	V	184.0	0.0	27.4


3.10a_ac-mode_MCS5_ch56

Test description: Electric Field Strength Measurement
 Test site and distance: Ref.-Nr. 441 Semi Anechoic Room (SAR) with 3 m measurement distance
 Version of Testsoftware: EMC32 V9.25.0
 Distance correction: not used
 Used filter: not used
 Technical Data: please see page 2 for detailed data of measurement setup
 Test specification.: FCC 15.209; RSS-Gen: Issue 3
 Operator: HEI
 Operating conditions: ac-mode | HT20 || MCS5| ch056
 Power during tests: 120V

EUT Information

Manufacturer: Vorwerk Elektroware GmbH + Co. KG
 Model: thermomix
 Type: Household equipment with WLAN
 HW: NWOT
 SW: 0.18.109-201808300615
 Serial Nr.: 18434212024100415
 Power Supply: 120V AC

Full Spectrum

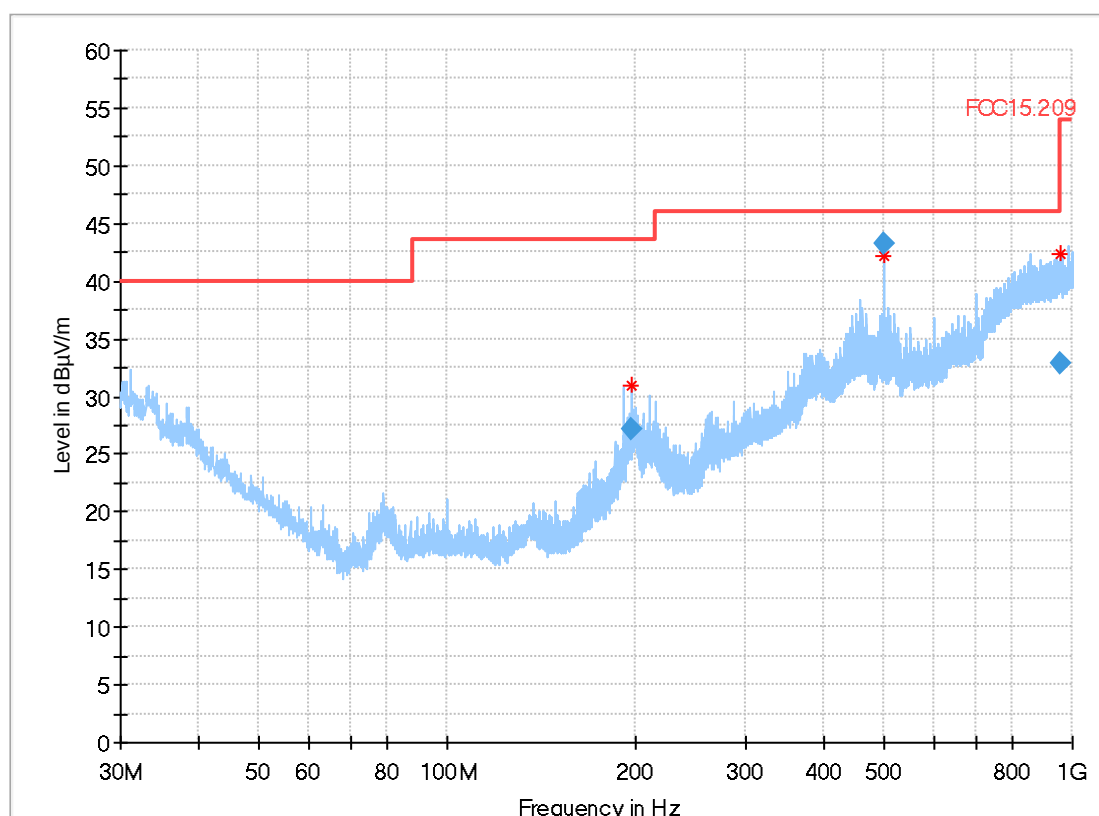

Final Result

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Elevation (deg)	Correction (dB)
197.140000	27.14	43.50	16.36	1000.0	120.000	137.0	H	304.0	0.0	11.4
499.936000	43.24	46.00	2.76	1000.0	120.000	156.0	H	-10.0	0.0	19.5
954.540000	32.85	46.00	13.15	1000.0	120.000	196.0	V	270.0	0.0	27.3


3.11a_ac-mode_MCS5_ch140

Test description:	Electric Field Strength Measurement
Test site and distance:	Ref.-Nr. 441 Semi Anechoic Room (SAR) with 3 m measurement distance
Version of Testsoftware:	EMC32 V9.25.0
Distance correction:	not used
Used filter:	not used
Technical Data:	please see page 2 for detailed data of measurement setup
Test specification.:	FCC 15.209; RSS-Gen: Issue 3
Operator:	HEI
Operating conditions:	ac-mode HT20 MCS5 ch140
Power during tests:	120V

EUT Information

Manufacturer:	Vorwerk Elektroware GmbH + Co. KG
Model:	thermomix
Type:	Household equipment with WLAN
HW:	NWOT
SW:	0.18.109-201808300615
Serial Nr.:	18434212024100415
Power Supply:	120V AC

Full Spectrum

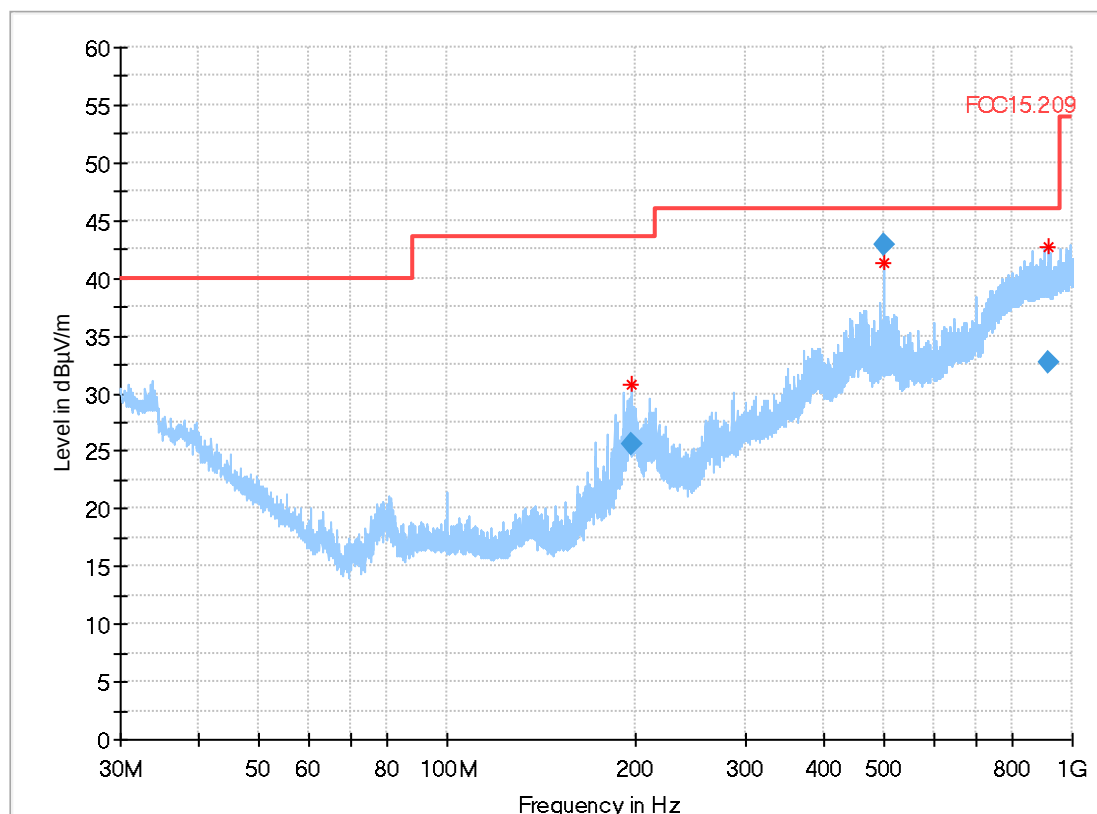

Final_Result

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Elevation (deg)	Corr. (dB)
197.092000	25.55	43.50	17.95	1000.0	120.000	150.0	H	335.0	0.0	11.4
499.936000	42.92	46.00	3.08	1000.0	120.000	174.0	H	-9.0	0.0	19.5
913.240000	32.63	46.00	13.37	1000.0	120.000	263.0	H	27.0	0.0	27.1


3.12a_ac-mode_MCS5_ch165

Test description:	Electric Field Strength Measurement
Test site and distance:	Ref.-Nr. 441 Semi Anechoic Room (SAR) with 3 m measurement distance
Version of Testsoftware:	EMC32 V9.25.0
Distance correction:	not used
Used filter:	not used
Technical Data:	please see page 2 for detailed data of measurement setup
Test specification.:	FCC 15.209; RSS-Gen: Issue 3
Operator:	HEI
Operating conditions:	ac-mode HT20 MCS5 ch165
Power during tests:	120V

EUT Information

Manufacturer:	Vorwerk Elektroware GmbH + Co. KG
Model:	thermomix
Type:	Household equipment with WLAN
HW:	NWOT
SW:	0.18.109-201808300615
Serial Nr.:	18434212024100415
Power Supply:	120V AC

Full Spectrum

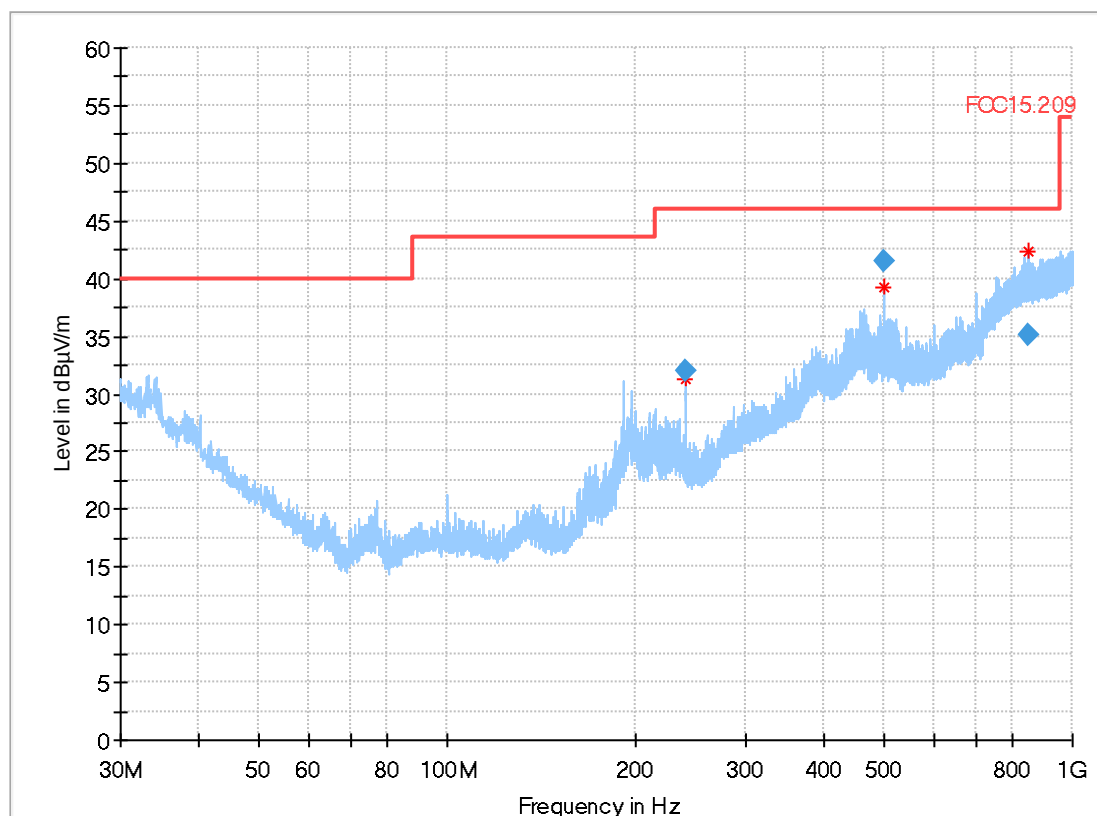

Final_Result

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Elevation (deg)	Correction (dB)
239.900000	32.04	46.00	13.96	1000.0	120.000	109.0	H	0.0	0.0	13.1
499.936000	41.53	46.00	4.47	1000.0	120.000	158.0	H	-6.0	0.0	19.5
851.204000	35.04	46.00	10.96	1000.0	120.000	109.0	H	177.0	0.0	25.7

3.2.2. 40MHz Bandwidth

n-mode


3.13a_n-mode_MCS7_ch038

Test description:	Electric Field Strength Measurement
Test site and distance:	Ref.-Nr. 441 Semi Anechoic Room (SAR) with 3 m measurement distance
Version of Testsoftware:	EMC32 V9.25.0
Distance correction:	not used
Used filter:	not used
Technical Data:	please see page 2 for detailed data of measurement setup
Test specification.:	FCC 15.209; RSS-Gen: Issue 3
Operator:	HEI
Operating conditions:	n-mode HT40 MCS7 ch038
Power during tests:	120V

EUT Information

Manufacturer:	Vorwerk Elektroware GmbH + Co. KG
Model:	thermomix
Type:	Household equipment with WLAN
HW:	NWOT
SW:	0.18.109-201808300615
Serial Nr.:	18434212024100415
Power Supply:	120V AC

Full Spectrum

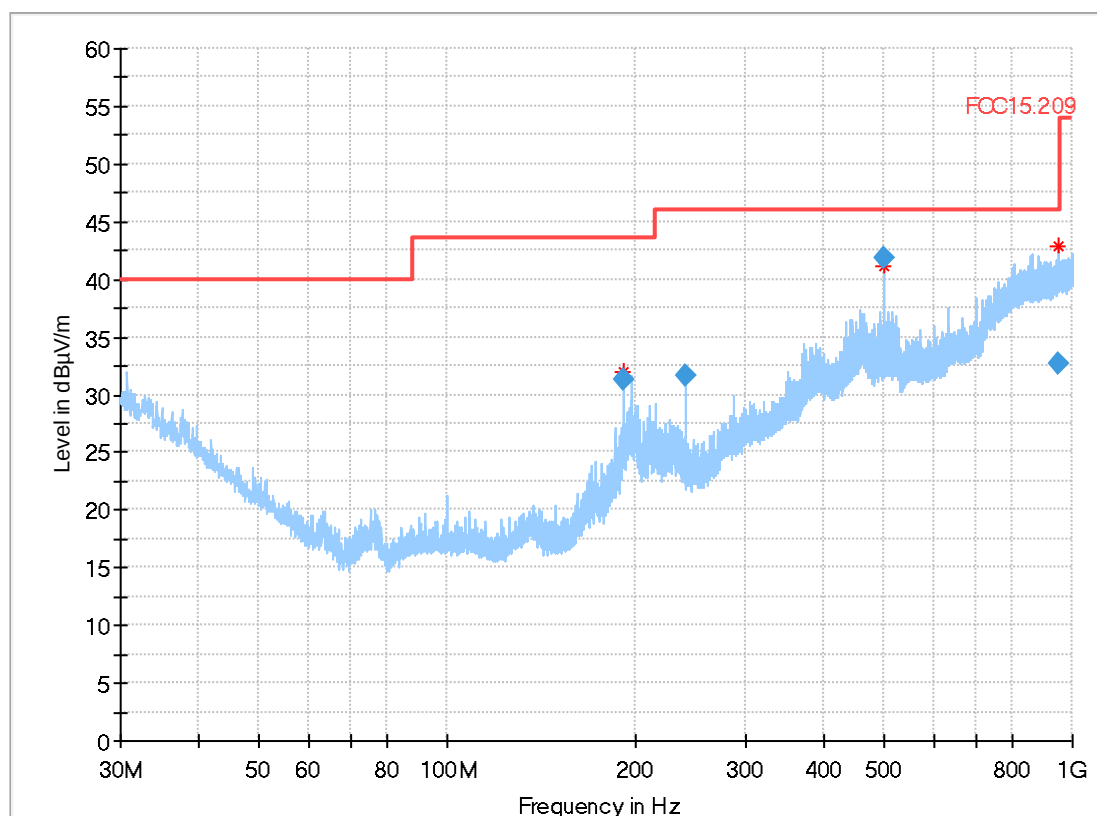

Final_Result

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margi n (dB)	Meas. Time (ms)	Bandwidth (kHz)	Heigh t (cm)	Pol	Azimuth (deg)	Elevatio n (deg)	Corr . (dB)
191.876000	31.31	43.50	12.19	1000.0	120.000	175.0	H	159.0	0.0	11.5
239.860000	31.58	46.00	14.42	1000.0	120.000	105.0	H	-9.0	0.0	13.1
499.936000	41.81	46.00	4.19	1000.0	120.000	163.0	H	-8.0	0.0	19.5
951.340000	32.76	46.00	13.24	1000.0	120.000	360.0	V	135.0	0.0	27.2


3.14a_n-mode_MCS7_ch54

Test description: Electric Field Strength Measurement
 Test site and distance: Ref.-Nr. 441 Semi Anechoic Room (SAR) with 3 m measurement distance
 Version of Testsoftware: EMC32 V9.25.0
 Distance correction: not used
 Used filter: not used
 Technical Data: please see page 2 for detailed data of measurement setup
 Test specification.: FCC 15.209; RSS-Gen: Issue 3
 Operator: MSo
 Operating conditions: n-mode | HT40 || MCS7 | ch054
 Power during tests: 120V

EUT Information

Manufacturer: Vorwerk Elektroware GmbH + Co. KG
 Model: thermomix
 Type: Household equipment with WLAN
 HW: NWOT
 SW: 0.18.109-201808300615
 Serial Nr.: 18434212024100415
 Power Supply: 120V AC

Full Spectrum

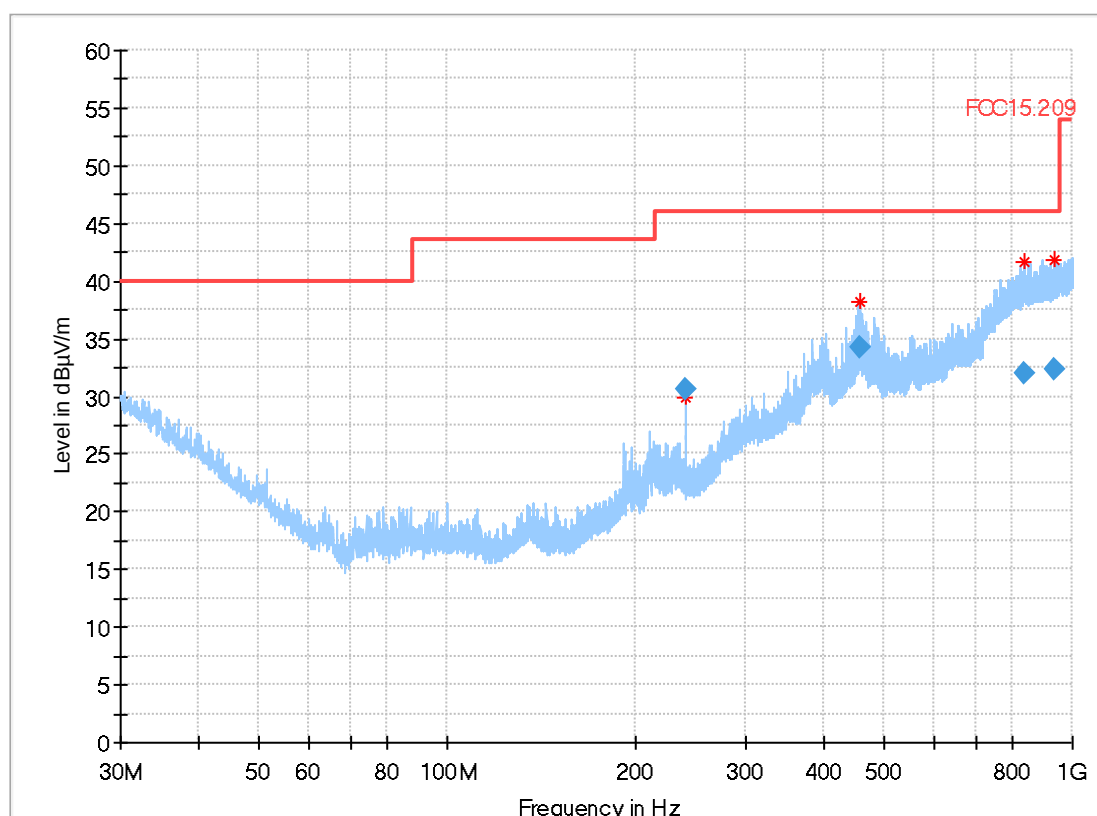

Final_Result

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Elevation (deg)	Corr. (dB)
239.908000	30.64	46.00	15.36	1000.0	120.000	112.0	H	153.0	0.0	13.1
457.212000	34.20	46.00	11.80	1000.0	120.000	118.0	V	264.0	0.0	19.5
839.304000	31.96	46.00	14.04	1000.0	120.000	226.0	H	180.0	0.0	25.9
938.536000	32.36	46.00	13.64	1000.0	120.000	360.0	V	296.0	0.0	27.0


3.15a_n-mode_MCS7_ch102

Test description:	Electric Field Strength Measurement
Test site and distance:	Ref.-Nr. 441 Semi Anechoic Room (SAR) with 3 m measurement distance
Version of Testsoftware:	EMC32 V9.25.0
Distance correction:	not used
Used filter:	not used
Technical Data:	please see page 2 for detailed data of measurement setup
Test specification.:	FCC 15.209; RSS-Gen: Issue 3
Operator:	MSo
Operating conditions:	n-mode HT40 MCS7 ch102
Power during tests:	120V

EUT Information

Manufacturer:	Vorwerk Elektroware GmbH + Co. KG
Model:	thermomix
Type:	Household equipment with WLAN
HW:	NWOT
SW:	0.18.109-201808300615
Serial Nr.:	18434212024100415
Power Supply:	120V AC

Full Spectrum

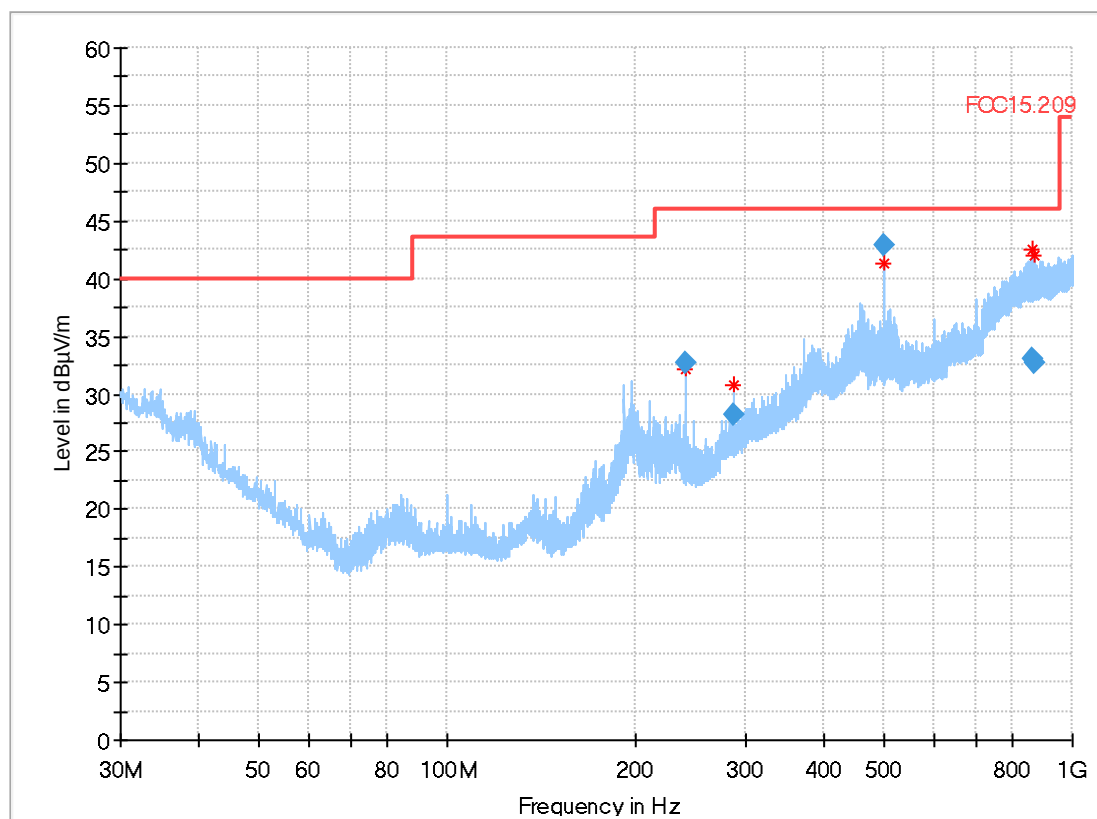

Final_Result

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Elevation (deg)	Corr. (dB)
239.864000	32.69	46.00	13.31	1000.0	120.000	113.0	H	338.0	0.0	13.1
287.960000	28.19	46.00	17.81	1000.0	120.000	112.0	H	0.0	0.0	14.6
499.936000	42.90	46.00	3.10	1000.0	120.000	159.0	H	-2.0	0.0	19.5
863.148000	33.10	46.00	12.90	1000.0	120.000	109.0	H	179.0	0.0	25.9
869.888000	32.71	46.00	13.29	1000.0	120.000	175.0	H	337.0	0.0	26.2


3.16a_n-mode_MCS7_ch151

Test description: Electric Field Strength Measurement
 Test site and distance: Ref.-Nr. 441 Semi Anechoic Room (SAR) with 3 m measurement distance
 Version of Testsoftware: EMC32 V9.25.0
 Distance correction: not used
 Used filter: not used
 Technical Data: please see page 2 for detailed data of measurement setup
 Test specification.: FCC 15.209; RSS-Gen: Issue 3
 Operator: MSo
 Operating conditions: n-mode | HT40 || MCS7 | ch151
 Power during tests: 120V

EUT Information

Manufacturer: Vorwerk Elektroware GmbH + Co. KG
 Model: thermomix
 Type: Household equipment with WLAN
 HW: NWOT
 SW: 0.18.109-201808300615
 Serial Nr.: 18434212024100415
 Power Supply: 120V AC

Full Spectrum

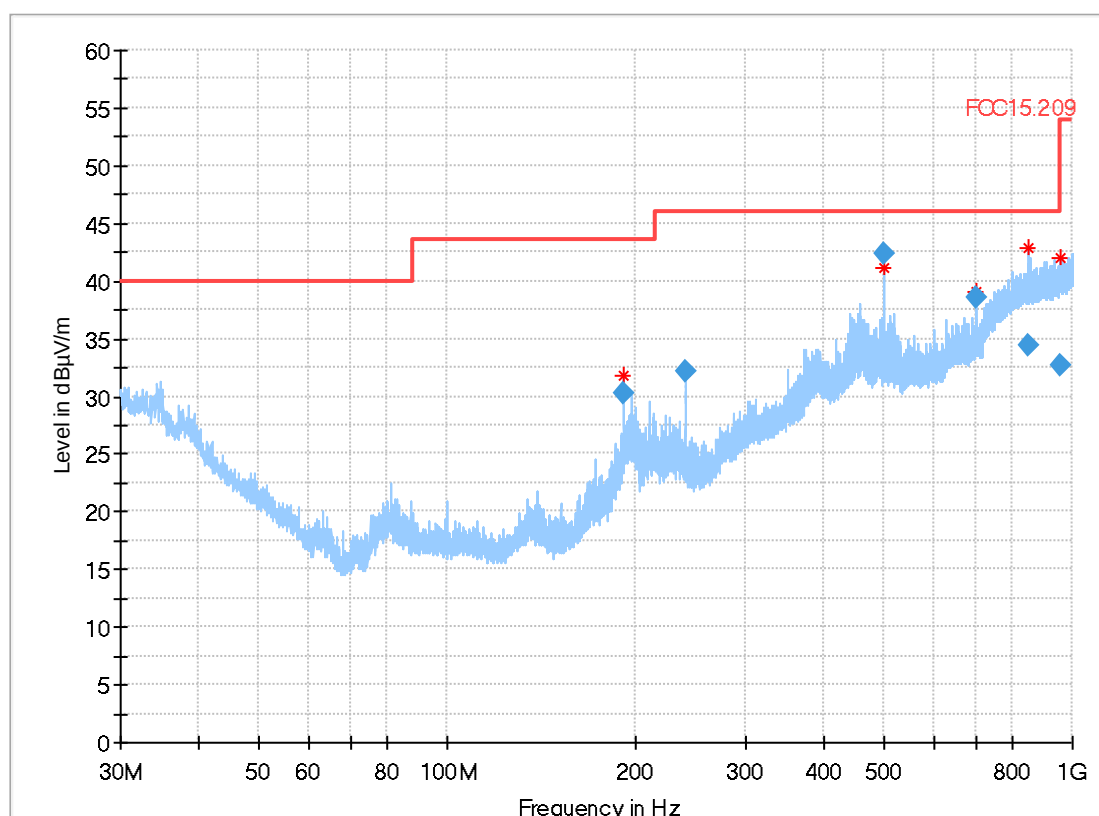

Final Result

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margi n (dB)	Meas. Time (ms)	Bandwidth (kHz)	Heigh t (cm)	Pol	Azimet h (deg)	Elevatio n (deg)	Corr . (dB)
191.860000	30.26	43.50	13.24	1000.0	120.000	169.0	H	173.0	0.0	11.5
239.864000	32.22	46.00	13.78	1000.0	120.000	105.0	H	-9.0	0.0	13.1
499.936000	42.39	46.00	3.61	1000.0	120.000	154.0	H	0.0	0.0	19.5
699.912000	38.53	46.00	7.47	1000.0	120.000	109.0	H	-2.0	0.0	23.7
851.072000	34.39	46.00	11.61	1000.0	120.000	109.0	H	169.0	0.0	25.7
957.724000	32.75	46.00	13.25	1000.0	120.000	306.0	V	283.0	0.0	27.4

ac-mode


3.17a_ac-mode_MCS7_ch046

Test description:	Electric Field Strength Measurement
Test site and distance:	Ref.-Nr. 441 Semi Anechoic Room (SAR) with 3 m measurement distance
Version of Testsoftware:	EMC32 V9.25.0
Distance correction:	not used
Used filter:	not used
Technical Data:	please see page 2 for detailed data of measurement setup
Test specification.:	FCC 15.209; RSS-Gen: Issue 3
Operator:	MSo
Operating conditions:	ac-mode HT40 MCS7 ch046
Power during tests:	120V

EUT Information

Manufacturer:	Vorwerk Elektroware GmbH + Co. KG
Model:	thermomix
Type:	Household equipment with WLAN
HW:	NWOT
SW:	0.18.109-201808300615
Serial Nr.:	18434212024100415
Power Supply:	120V AC

Full Spectrum

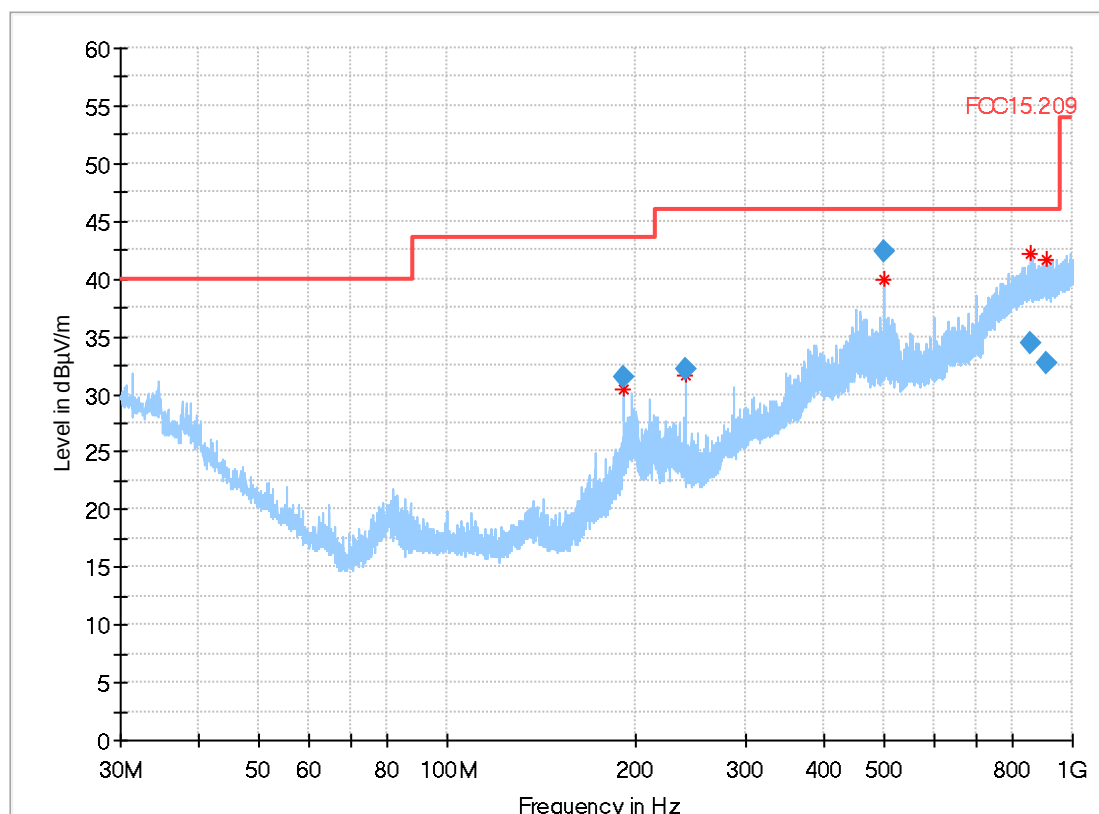

Final Result

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margi n (dB)	Meas. Time (ms)	Bandwidth (kHz)	Heigh t (cm)	Pol	Azimuth (deg)	Elevatio n (deg)	Corr . (dB)
191.868000	31.49	43.50	12.01	1000.0	120.000	166.0	H	185.0	0.0	11.5
239.864000	32.12	46.00	13.88	1000.0	120.000	117.0	H	338.0	0.0	13.1
499.936000	42.41	46.00	3.59	1000.0	120.000	161.0	H	-2.0	0.0	19.5
857.424000	34.35	46.00	11.65	1000.0	120.000	186.0	H	175.0	0.0	25.7
911.236000	32.68	46.00	13.32	1000.0	120.000	212.0	V	315.0	0.0	27.3