



Shenzhen CTL Testing Technology Co., Ltd.
Tel: +86-755-89486194 Fax: +86-755-26636041

TEST REPORT

FCC PART 15 SUBPART C 15.247 & RSS 247

Report Reference No.: CTL1606202312-WF-01

Compiled by:
(position+printed name+signature)

Jacky Chen
(File administrators)

Jacky Chen

Tested by:
(position+printed name+signature)

Allen Wang
(Test Engineer)

Allen Wang

Approved by:
(position+printed name+signature)

Tracy Qi
(Manager)

Tracy Qi

Product Name.....: Smart home gateway

Model/Type reference: RWM101

List Model(s).....: /

Trade Mark.....: Rinnai

FCC ID: 2AGHJ-RWM101B

Applicant's name: Rinnai America Corporation

Address of applicant: 103 International Drive , Peachtree City, GA, 30269, USA

Test Firm: Shenzhen CTL Testing Technology Co., Ltd.

Address of Test Firm: Floor 1-A, Baisha Technology Park, No.3011, Shaheixi Road,
Nanshan District, Shenzhen, China 518055

Test specification: 47 CFR FCC Part 15 Subpart C 15.247 &
Standard.....: RSS 247 Issue 1, May 2015

TRF Originator: Shenzhen CTL Testing Technology Co., Ltd.

Master TRF: Dated 2011-01

Date of Receipt.....: Jun. 20, 2016

Date of Test Date.....: Jun. 21, 2016–Jul. 01, 2016

Data of Issue.....: Jul. 02, 2016

Result.....: Pass

Shenzhen CTL Testing Technology Co., Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen CTL Testing Technology Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen CTL Testing Technology Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

TEST REPORT

Test Report No. :	CTL1606202312-WF-01	Jul. 02, 2016 Date of issue
--------------------------	----------------------------	--------------------------------

Equipment under Test : Smart home gateway

Model /Type : RWM101

Listed Models : /

Applicant : **Rinnai America Corporation**

Address : 103 International Drive , Peachtree City, GA, 30269, USA

Manufacturer : **Rinnai America Corporation**

Address : 103 International Drive , Peachtree City, GA, 30269, USA

Test result	Pass *
--------------------	---------------

* In the configuration tested, the EUT complied with the standards specified page 5.

The test report merely corresponds to the test sample.

It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

**** Modified History ****


Revisions	Description	Issued Data	Report No.	Remark
Version 1.0	Initial Test Report Release	2016-07-02	CTL1606202312-WF-01	Tracy Qi



Table of Contents

Page

1. SUMMARY.....	5
1.1. TEST STANDARDS.....	5
1.2. TEST DESCRIPTION.....	5
1.3. TEST FACILITY	6
1.4. STATEMENT OF THE MEASUREMENT UNCERTAINTY.....	6
2. GENERAL INFORMATION.....	7
2.1. ENVIRONMENTAL CONDITIONS	7
2.2. GENERAL DESCRIPTION OF EUT	7
2.3. DESCRIPTION OF TEST MODES AND TEST FREQUENCY.....	8
2.4. EQUIPMENTS USED DURING THE TEST	9
2.5. RELATED SUBMITTAL(S) / GRANT (S).....	9
2.6. MODIFICATIONS.....	9
3. TEST CONDITIONS AND RESULTS	10
3.1. CONDUCTED EMISSIONS TEST	10
3.2. RADIATED EMISSIONS AND BAND EDGE	13
3.3. MAXIMUM CONDUCTED OUTPUT POWER.....	19
3.4. POWER SPECTRAL DENSITY	20
3.5. 6dB BANDWIDTH.....	23
3.6. OCCUPIED BANDWIDTH.....	26
3.7. OUT-OF-BAND EMISSIONS	29
4. TEST SETUP PHOTOS OF THE EUT	36
5. EXTERNAL AND INTERNAL PHOTOS OF THE EUT	38

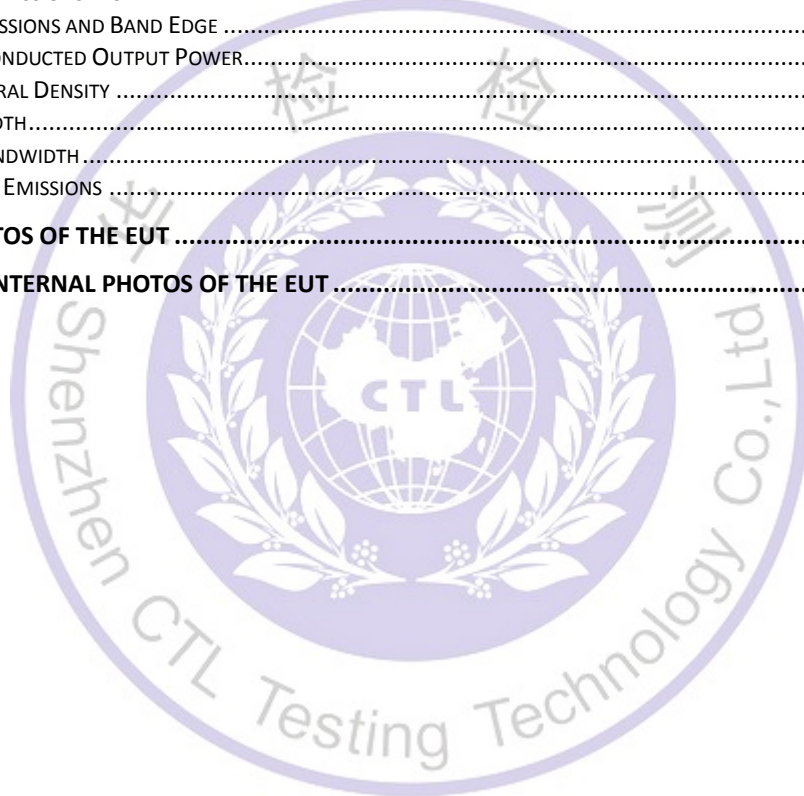

1. SUMMARY

1.1. TEST STANDARDS

The tests were performed according to following standards:

FCC Rules Part 15.247: Frequency Hopping, Direct Spread Spectrum and Hybrid Systems that are in operation within the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz

RSS-247-Issue 1: Digital Transmission Systems (DTSs), Frequency Hopping Systems (FHSs) and Licence-Exempt Local Area Network (LE-LAN) Devices.

RSS-Gen Issue 4: — General Requirements for Compliance of Radio Apparatus

ANSI C63.10:2013 : American National Standard for Testing Unlicensed Wireless Devices

ANSI C63.4: 2014: —American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40GHz
Range of 9 kHz to 40GHz

1.2. Test Description

FCC and IC Requirements		
FCC Part 15.207 RSS-Gen 8.8	AC Power Conducted Emission	PASS
FCC Part 15.247(a)(2) RSS 247 5.2 (1) RSS GEN 6.6	6dB Bandwidth & 99% Bandwidth	PASS
FCC Part 15.247(d) RSS 247 5.5	Spurious RF Conducted Emission	PASS
FCC Part 15.247(b) RSS 247 5.4 (4)	Maximum Conducted Output Power	PASS
FCC Part 15.247(e) RSS 247 5.2 (2)	Power Spectral Density	PASS
FCC Part 15.205/ 15.209 RSS-Gen 8.9	Radiated Emissions	PASS
FCC Part 15.247(d) RSS-Gen 8.10	Band Edge	PASS

1.3. Test Facility

1.3.1 Address of the test laboratory

Shenzhen CTL Testing Technology Co., Ltd.

Floor 1-A, Baisha Technology Park, No. 3011, Shahexi Road, Nanshan, Shenzhen 518055 China

There is one 3m semi-anechoic chamber and two line conducted labs for final test. The Test Sites meet the requirements in documents ANSI C63.4 and CISPR 22/EN 55022 requirements.

1.3.2 Laboratory accreditation

The test facility is recognized, certified, or accredited by the following organizations:

IC Registration No.: 9618B

The 3m alternate test site of Shenzhen CTL Testing Technology Co., Ltd. EMC Laboratory has been registered by Certification and Engineer Bureau of Industry Canada for the performance of with Registration No.: 9618B on November 13, 2013.

FCC-Registration No.: 970318

Shenzhen CTL Testing Technology Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 970318, December 19, 2013.

1.4. Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16 - 4 "Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements" and is documented in the Shenzhen CTL Testing Technology Co., Ltd. quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for CTL laboratory is reported:

Test	Measurement Uncertainty	Notes
Transmitter power conducted	± 0.57 dB	(1)
Transmitter power Radiated	± 2.20 dB	(1)
Conducted spurious emission 9KHz-40 GHz	± 2.20 dB	(1)
Occupied Bandwidth	± 0.01 ppm	(1)
Radiated Emission 30~1000MHz	± 4.10 dB	(1)
Radiated Emission Above 1GHz	± 4.32 dB	(1)
Conducted Disturbance 0.15~30MHz	± 3.20 dB	(1)

- (1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

2. GENERAL INFORMATION

2.1. Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Normal Temperature:	25°C
Relative Humidity:	55 %
Air Pressure:	101 kPa

2.2. General Description of EUT

Product Name:	Smart home gateway
Model/Type reference:	RWM101
Power supply:	DC 12V form adapter or external DC 12V
Adapter information:	Model No.:F18W-120150SPAU Input: 100-240~ 50/60Hz 0.6A Output:12V---1.5A
WIFI	
Supported type:	802.11b/802.11g/802.11n(H20)/802.11n(H40)
Modulation:	802.11b: DSSS 802.11g/802.11n(H20)/802.11n(H40): OFDM
Operation frequency:	802.11b/802.11g/802.11n(H20): 2412MHz~2462MHz 802.11n(H40): 2422MHz~2452MHz
Channel number:	802.11b/802.11g/802.11n(H20): 11 802.11n(H40): 7
Channel separation:	5MHz
Antenna type:	Ceramic Antenna
Antenna gain:	1.25dBi

Note: For more details, refer to the user's manual of the EUT.

2.3. Description of Test Modes and Test Frequency

The Applicant provides communication tools software to control the EUT for staying in continuous transmitting (Duty Cycle more than 98%) and receiving mode for testing.

There are 11 channels provided to the EUT of WIFI and Channel 01/06/11 were selected for testing.

Operation Frequency WIFI :

Channel	Frequency(MHz)	Channel	Frequency(MHz)
1	2412	8	2447
2	2417	9	2452
3	2422	10	2457
4	2427	11	2462
5	2432		
6	2437		
7	2442		

Note: The line display in grey were the channel selected for testing

Data Rate Used:

Preliminary tests were performed in different data rate to find the worst radiated emission. The data rate shown in the table below is the worst-case rate with respect to the specific test item. Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

Test Items	Mode	Data Rate	Channel
Maximum Conducted Output Power Power Spectral Density 6dB Bandwidth Spurious RF conducted emission Radiated Emission 9kHz~1GHz& Radiated Emission 1GHz~10th Harmonic	11b/DSSS	1 Mbps	1/6/11
	11g/OFDM	6 Mbps	1/6/11
	11n(20MHz)/OFDM	6.5Mbps	1/6/11
	11n(40MHz)/OFDM	13.5 Mbps	3/6/9
Band Edge	11b/DSSS	1 Mbps	1/11
	11g/OFDM	6 Mbps	1/11
	11n(20MHz)/OFDM	6.5Mbps	1/11
	11n(40MHz)/OFDM	13.5 Mbps	3//9

2.4. Equipments Used during the Test

Test Equipment	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Due Date
LISN	R&S	ENV216	3560.6550.1 2	2016/06/02	2017/06/01
LISN	R&S	ESH2-Z5	860014/010	2016/06/02	2017/06/01
Power Meter	Anritsu	ML2487B	110553	2016/06/02	2017/06/01
Power Sensor	Anritsu	MA2411B	100345	2016/05/21	2017/05/20
Bilog Antenna	Sunol Sciences Corp.	JB1	A061713	2016/06/02	2017/06/01
EMI Test Receiver	R&S	ESCI	103710	2016/06/02	2017/06/01
Spectrum Analyzer	Agilent	E4407B	MY41440676	2016/05/21	2017/05/20
Spectrum Analyzer	Agilent	N9020	US46220290	2016/01/17	2017/01/16
Controller	EM Electronics	Controller EM 1000	N/A	2016/05/21	2017/05/20
Horn Antenna	Sunol Sciences Corp.	DRH-118	A062013	2016/05/19	2017/05/18
Active Loop Antenna	SCHWARZBECK	FMZB1519	1519-037	2016/05/19	2017/05/18
Amplifier	Agilent	8349B	3008A02306	2016/05/19	2017/05/18
Amplifier	Agilent	8447D	2944A10176	2016/05/19	2017/05/18
Temperature/Humidity Meter	Gangxing	CTH-608	02	2016/05/20	2017/05/19
High-Pass Filter	K&L	9SH10-2700/X1 2750-O/O	N/A	2016/05/20	2017/05/19
High-Pass Filter	K&L	41H10-1375/U1 2750-O/O	N/A	2016/05/20	2017/05/19
Coaxial Cables	HUBER+SUHNER	SUCOFLEX 104PEA-10M	10m	2016/06/02	2017/06/01
Coaxial Cables	HUBER+SUHNER	SUCOFLEX 104PEA-3M	3m	2016/06/02	2017/06/01
Coaxial Cables	HUBER+SUHNER	SUCOFLEX 104PEA-3M	3m	2016/06/02	2017/06/01
RF Cable	Megalon	RF-A303	N/A	2016/06/02	2017/06/01

The calibration interval was one year

2.5. Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for FCC ID: 2AGHJ-RWM101B filing to comply with Section 15.247 of the FCC Part 15, Subpart C Rules and RSS 247.

2.6. Modifications

No modifications were implemented to meet testing criteria.

3. TEST CONDITIONS AND RESULTS

3.1. Conducted Emissions Test


LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.207 and RSS–Gen 8.8

Frequency range (MHz)	Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency.

TEST CONFIGURATION

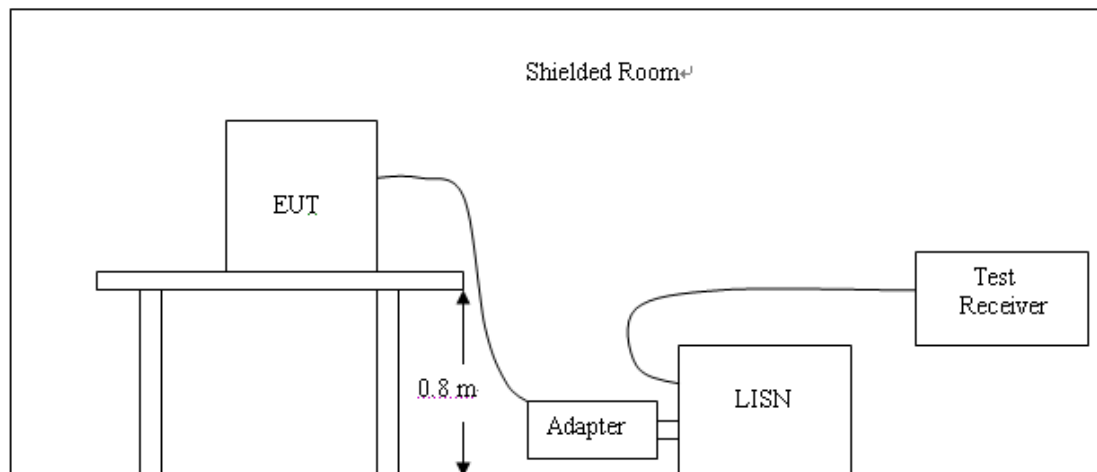

TEST PROCEDURE


1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. The EUT is a tabletop system; a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10:2013.
2. Support equipment, if needed, was placed as per ANSI C63.10:2013
3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10:2013.
4. The adapter received AC120V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.
5. All support equipments received AC power from a second LISN, if any.
6. The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
7. Analyzer / Receiver scanned from 150 KHz to 30MHz for emissions in each of the test modes.
8. During the above scans, the emissions were maximized by cable manipulation.

TEST RESULTS

Remark: All modes 802.11b/802.11g/802.11n (H20)/802.11n (H40) have been tested; only worse case is reported.

Line:**L****SCAN TABLE: "Voltage (9K-30M) FIN"**

Short Description: 150K-30M Voltage

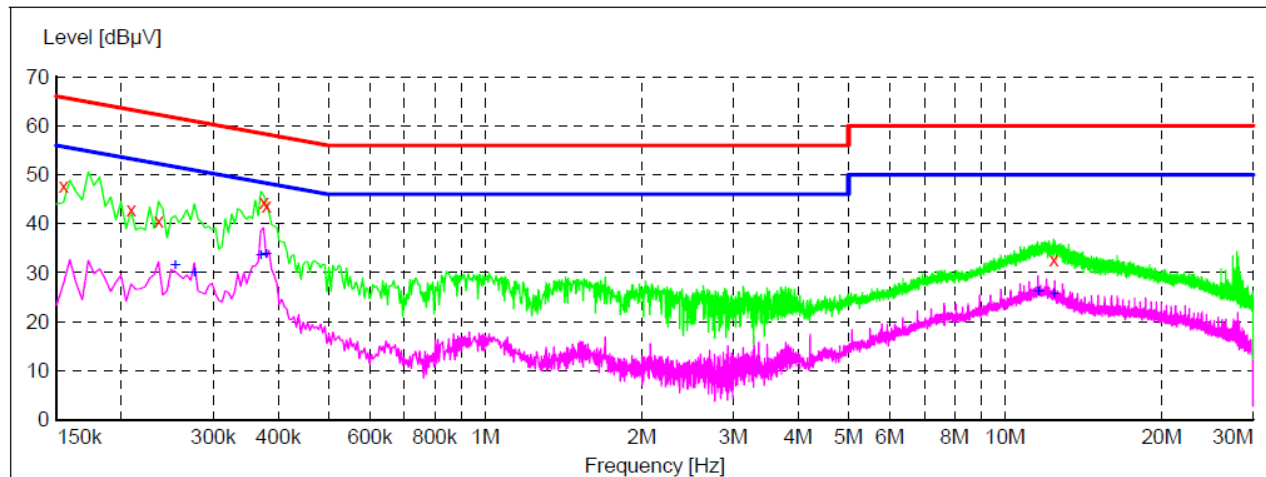

x x x MES CTL160701122_fin

MEASUREMENT RESULT: "CTL160701122_fin"

7/1/2016 1:58PM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.154501	47.80	10.2	66	18.0	QP	L1	GND
0.208501	43.00	10.2	63	20.3	QP	L1	GND
0.235501	40.70	10.2	62	21.6	QP	L1	GND
0.375001	44.40	10.2	58	14.0	QP	L1	GND
0.379501	43.70	10.2	58	14.6	QP	L1	GND
12.408001	32.70	10.6	60	27.3	QP	L1	GND

MEASUREMENT RESULT: "CTL160701122_fin2"

7/1/2016 1:58PM


Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.253501	31.40	10.2	52	20.2	AV	L1	GND
0.276001	29.90	10.2	51	21.0	AV	L1	GND
0.370501	33.50	10.2	49	15.0	AV	L1	GND
0.379501	33.80	10.2	48	14.5	AV	L1	GND
11.607001	26.00	10.6	50	24.0	AV	L1	GND
12.426001	25.60	10.6	50	24.4	AV	L1	GND

Line:

N

SCAN TABLE: "Voltage (9K-30M) FIN"

Short Description: 150K-30M Voltage

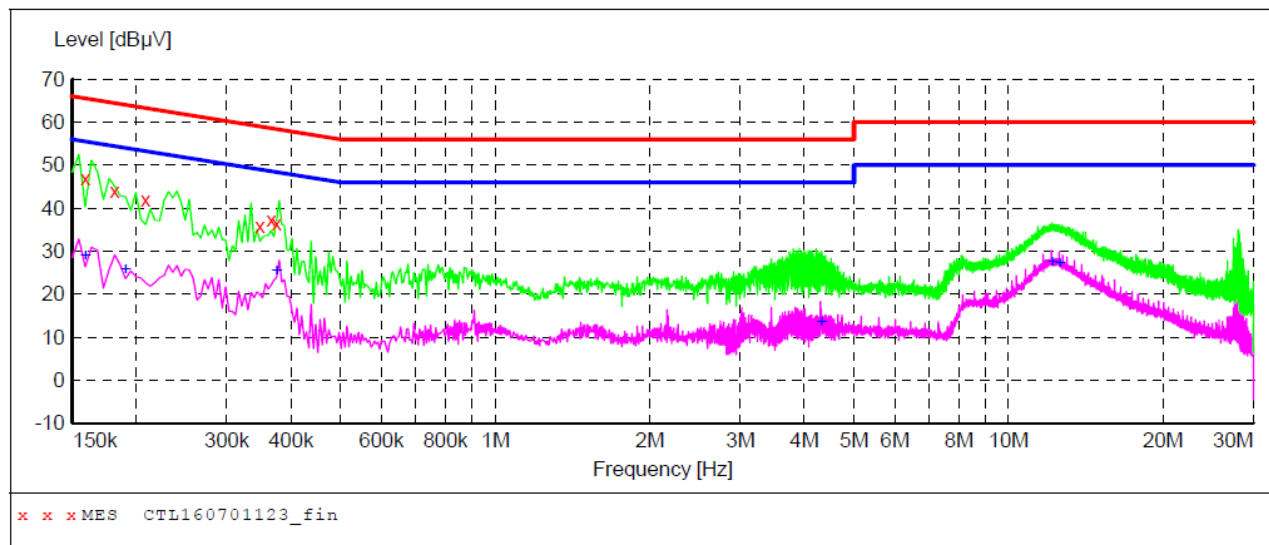**MEASUREMENT RESULT: "CTL160701123_fin"**

7/1/2016 2:02PM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.159001	47.00	10.2	66	18.5	QP	N	GND
0.181501	44.00	10.2	64	20.4	QP	N	GND
0.208501	42.00	10.2	63	21.3	QP	N	GND
0.348001	35.70	10.2	59	23.3	QP	N	GND
0.366001	37.20	10.2	59	21.4	QP	N	GND
0.375001	36.50	10.2	58	21.9	QP	N	GND

MEASUREMENT RESULT: "CTL160701123_fin2"

7/1/2016 2:02PM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.159001	28.70	10.2	56	26.8	AV	N	GND
0.190501	25.60	10.2	54	28.4	AV	N	GND
0.375001	25.40	10.2	48	23.0	AV	N	GND
4.312501	13.30	10.4	46	32.7	AV	N	GND
12.165001	27.40	10.6	50	22.6	AV	N	GND
12.588001	27.20	10.6	50	22.8	AV	N	GND

3.2. Radiated Emissions and Band Edge

Limit

For intentional device, according to § 15.209(a), the general requirement of field strength of radiated emission out of authorized band shall not exceed the following table at a 3 meters measurement distance.

In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a)

Except when the requirements applicable to a given device state otherwise, emissions from licence-exempt transmitters shall comply with the field strength limits shown in table below. Additionally, the level of any transmitter emission shall not exceed the level of the transmitter's fundamental emission


Unwanted emissions that fall into restricted bands shall comply with the limits specified in RSS-Gen; and Unwanted emissions that do not fall within the restricted frequency bands shall comply either with the limits specified in the applicable RSS or with those specified in this RSS-Gen.

Radiated emission limits


Frequency (MHz)	Distance (Meters)	Radiated (dB μ V/m)	Radiated (μ V/m)
0.009-0.49	3	$20\log(2400/F(\text{KHz}))+40\log(300/3)$	$2400/F(\text{KHz})$
0.49-1.705	3	$20\log(24000/F(\text{KHz}))+40\log(30/3)$	$24000/F(\text{KHz})$
1.705-30	3	$20\log(30)+40\log(30/3)$	30
30-88	3	40.0	100
88-216	3	43.5	150
216-960	3	46.0	200
Above 960	3	54.0	500

TEST CONFIGURATION


(A) Radiated Emission Test Set-Up, Frequency Below 30MHz

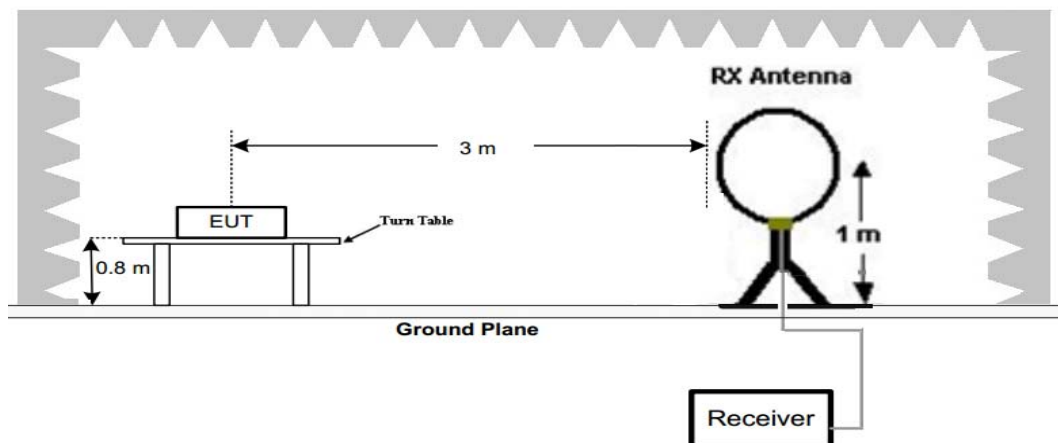

(B) Radiated Emission Test Set-Up, Frequency below 1000MHz

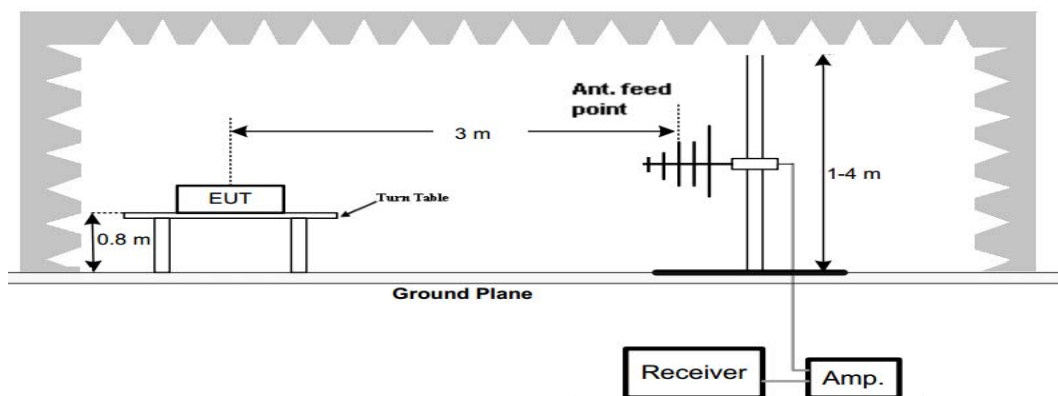

(C) Radiated Emission Test Set-Up, Frequency above 1000MHz

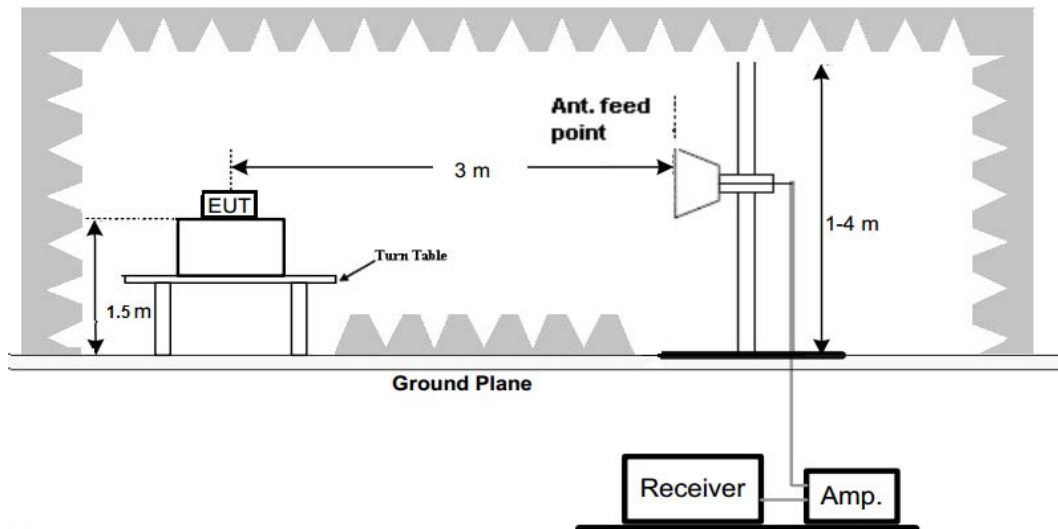**Test Procedure**

1. The EUT was placed on turn table which is 0.8m above ground plane for below 1GHz test, and on a low permittivity and low loss tangent turn table which is 1.5m above ground plane for above 1GHz test.
2. Maximum procedure was performed by raising the receiving antenna from 1m to 4m and rotating the turn table from 0° to 360° to acquire the highest emissions from EUT
3. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
4. Repeat above procedures until all frequency measurements have been completed.

TEST RESULTS

Remark:



1. We tested three channels (lowest/middle/highest) of each mode and recorded worst case for measurement below 1GHz.
2. For WIFI test we tested three channels (lowest/middle/highest) of each mode and recorded worst case at 802.11b mode above 1GHz.
3. The EUT was tested at three different polar directions: X, Y and Z. only the worst case (X axis) is reported.

For 9 KHz-30MHz

WIFI

Frequency (MHz)	Corrected Reading (dBuV/m)@3m	FCC Limit (dBuV/m) @3m	Margin (dB)	Detector	Result
0.30	54.69	98.06	43.37	PK	PASS
1.75	42.45	62.74	20.29	QP	PASS
15.87	53.52	69.54	16.02	QP	PASS
25.41	52.36	69.54	17.18	QP	PASS

For 30MHz-1GHz

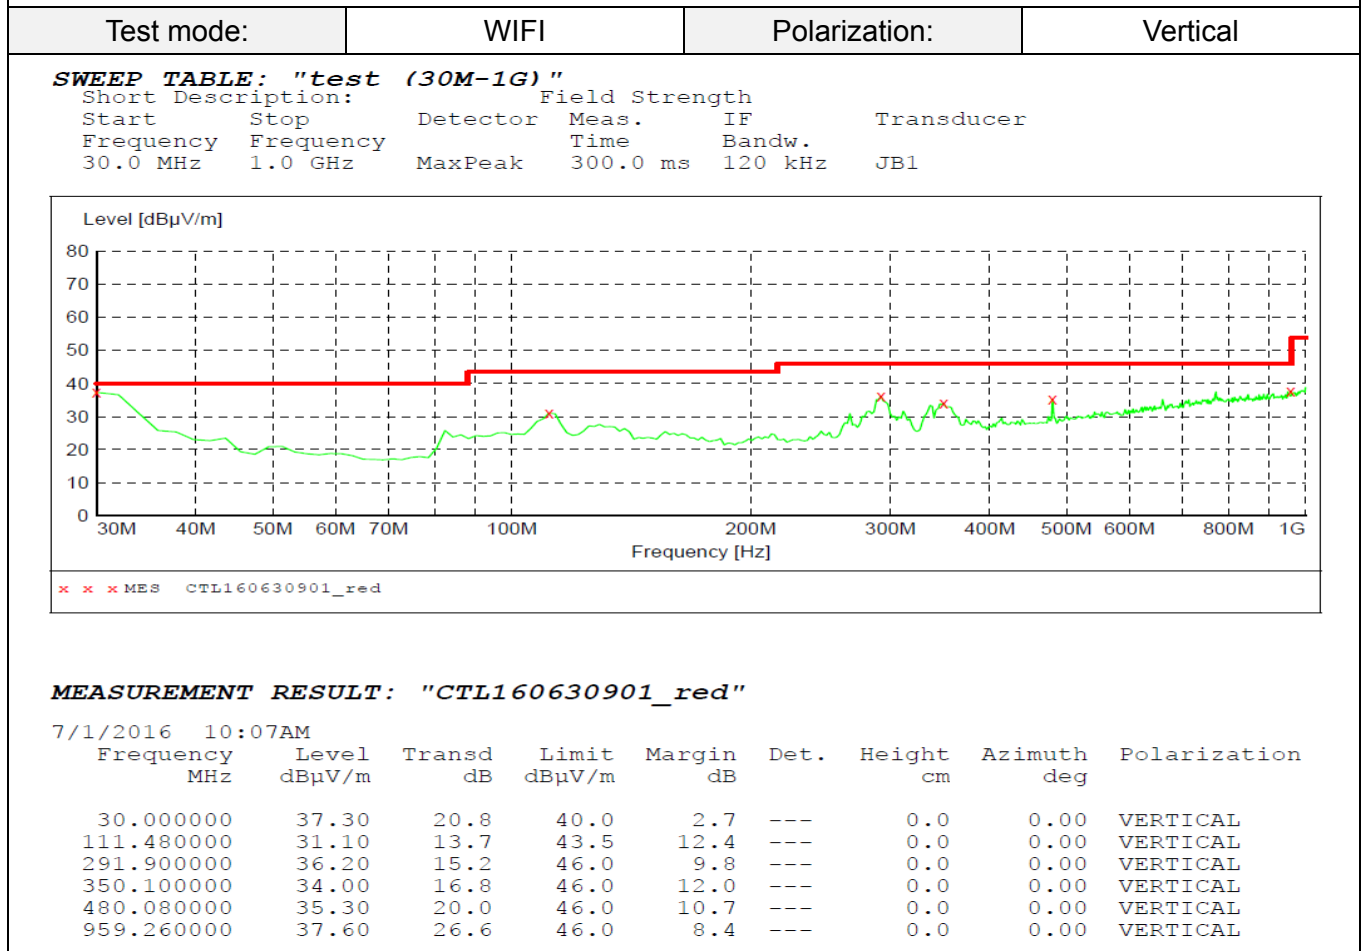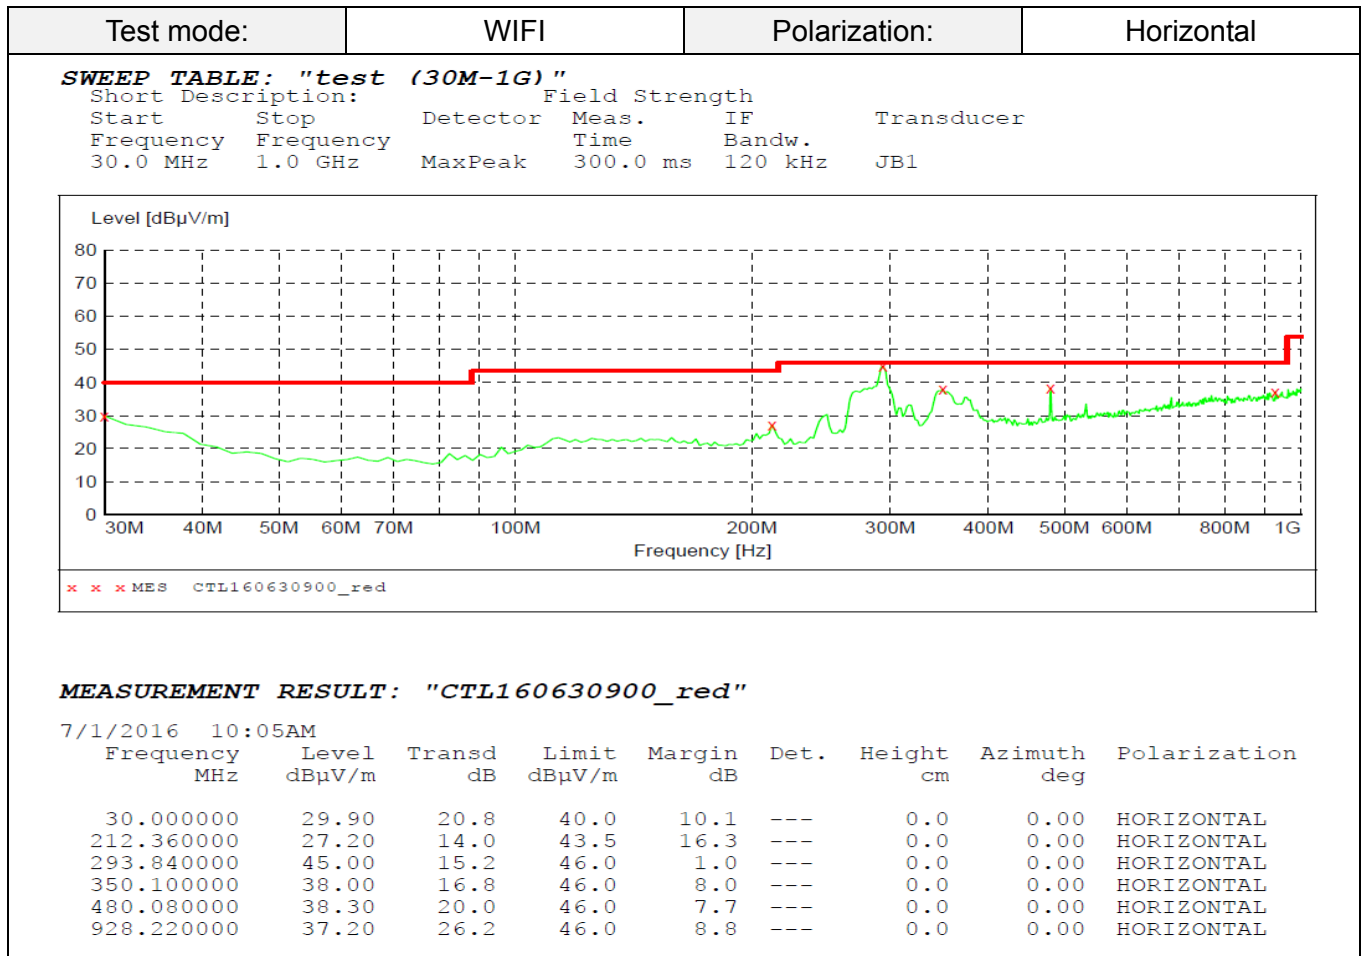

For 1GHz to 25GHz

Note: 802.11b/802.11g/802.11n (H20)/802.11n (H40) all have been tested, only worse case 802.11b is reported.

802.11b Mode (above 1GHz)

Frequency(MHz):				2412		Polarity:			HORIZONTAL	
No.	Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
1	2412.00	98.78	PK	--	--	65.36	28.80	4.62	0.00	33.42
1	2412.00	90.69	AV	--	--	57.27	28.80	4.62	0.00	33.42
2	2390.00	50.14	PK	74	23.86	16.82	28.72	4.60	0.00	33.32
2	2390.00	--	AV	54	--	--	--	--	--	--
3	2400.00	55.32	PK	74	18.68	21.93	28.78	4.61	0.00	33.39
3	2400.00	48.63	AV	54	5.37	15.24	28.78	4.61	0.00	33.39
4	4824.00	57.85	PK	74	16.15	53.30	33.52	6.92	35.89	4.55
4	4824.00	48.54	AV	54	5.46	43.99	33.52	6.92	35.89	4.55
5	5275.75	46.25	PK	74	27.75	38.78	34.62	7.19	34.33	7.47
5	5275.75	--	AV	54	--	--	--	--	--	--
6	7236.00	45.87	PK	74	28.13	34.60	37.10	9.19	35.02	11.27
6	7236.00	--	AV	54	--	--	--	--	--	--

Frequency(MHz):				2412		Polarity:			VERTICAL	
No.	Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
1	2412.00	99.45	PK	--	--	66.03	28.80	4.62	0.00	33.42
1	2412.00	91.21	AV	--	--	57.79	28.80	4.62	0.00	33.42
2	2390.00	50.36	PK	74	23.64	17.04	28.72	4.60	0.00	33.32
2	2390.00	--	AV	54	--	--	--	--	--	--
3	2400.00	55.78	PK	74	18.22	22.39	28.78	4.61	0.00	33.39
3	2400.00	49.32	AV	54	4.68	15.93	28.78	4.61	0.00	33.39
4	4824.00	58.74	PK	74	15.26	54.19	33.52	6.92	35.89	4.55
4	4824.00	49.68	AV	54	4.32	45.13	33.52	6.92	35.89	4.55
5	5325.50	45.22	PK	74	28.78	37.69	34.67	7.22	34.35	7.53
5	5325.50	--	AV	54	--	--	--	--	--	--
6	7236.00	45.31	PK	74	28.69	34.04	37.10	9.19	35.02	11.27
6	7236.00	--	AV	54	--	--	--	--	--	--

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m)
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) - Pre-amplifier Factor
3. Margin value = Limit value - Emission level.
4. -- Mean the PK detector measured value is below average limit.
5. The other emission levels were very low against the limit.
6. RBW1MHz VBW3MHz Peak detector is for PK value; RBW 1MHz VBW10Hz Peak detector is for AV value.

Frequency(MHz):				2437		Polarity:			HORIZONTAL	
No.	Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
1	2437.00	99.85	PK	--	--	66.35	28.85	4.65	0.00	33.50
1	2437.00	93.14	AV	--	--	59.64	28.85	4.65	0.00	33.50
2	4316.50	47.85	PK	74	26.15	43.04	32.83	6.60	34.62	4.81
2	4316.50	--	AV	54	--	--	--	--	--	--
3	4874.00	58.74	PK	74	15.26	52.50	33.59	6.95	34.30	6.24
3	4874.00	49.42	AV	54	4.58	43.18	33.59	6.95	34.30	6.24
4	5437.50	47.69	PK	74	26.31	39.65	34.74	7.28	33.98	8.04
4	5437.50	--	AV	54	--	--	--	--	--	--
5	7311.00	46.41	PK	74	27.59	34.75	37.44	9.22	35.00	11.66
5	7311.00	--	AV	54	--	--	--	--	--	--

Frequency(MHz):				2437		Polarity:			VERTICAL	
No.	Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
1	2437.00	99.63	PK	--	--	66.13	28.85	4.65	0.00	33.50
1	2437.00	92.47	AV	--	--	58.97	28.85	4.65	0.00	33.50
2	3578.75	47.52	PK	74	26.48	44.69	32.00	5.92	35.09	2.83
2	3578.75	--	AV	54	--	--	--	--	--	--
3	4874.00	59.72	PK	74	14.28	53.38	33.59	6.95	34.20	6.34
3	4874.00	51.41	AV	54	2.59	45.07	33.59	6.95	34.20	6.34
4	5275.50	46.39	PK	74	27.61	38.66	34.62	7.19	34.07	7.73
4	5275.50	--	AV	54	--	--	--	--	--	--
5	7311.00	45.77	PK	74	28.23	34.11	37.44	9.22	35.00	11.66
5	7311.00	--	AV	54	--	--	--	--	--	--

REMARKS:

1. Emission level (dBuV/m) =Raw Value (dBuV)+Correction Factor (dB/m)
2. Correction Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
3. Margin value = Limit value- Emission level.
4. -- Mean the PK detector measured value is below average limit.
5. The other emission levels were very low against the limit.
6. RBW1MHz VBW3MHz Peak detector is for PK value; RBW 1MHz VBW10Hz Peak detector is for AV value.

Frequency(MHz):				2462		Polarity:			HORIZONTAL	
No.	Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
1	2462.00	98.41	PK	--	--	64.84	28.89	4.68	0.00	33.57
1	2462.00	90.25	AV	--	--	56.68	28.89	4.68	0.00	33.57
2	2483.50	56.32	PK	74	17.68	22.69	28.93	4.70	0.00	33.63
2	2483.50	48.25	AV	54	5.75	14.62	28.93	4.70	0.00	33.63
3	2500.00	49.15	PK	74	24.85	15.47	28.96	4.72	0.00	33.68
3	2500.00	--	AV	54	--	--	--	--	--	--
4	4924.00	57.25	PK	74	16.75	52.47	33.71	6.98	35.91	4.78
4	4924.00	48.36	AV	54	5.64	43.58	33.71	6.98	35.91	4.78
5	5075.50	46.41	PK	74	27.59	39.35	34.24	7.08	34.26	7.06
5	5075.50	--	AV	54	--	--	--	--	--	--
6	7386.00	45.32	PK	74	28.68	33.44	37.61	9.25	34.98	11.88
6	7386.00	--	AV	54	--	--	--	--	--	--

Frequency(MHz):				2462		Polarity:			VERTICAL	
No.	Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
1	2462.00	98.35	PK	--	--	64.78	28.89	4.68	0.00	33.57
1	2462.00	90.47	AV	--	--	56.90	28.89	4.68	0.00	33.57
2	2483.50	57.14	PK	74	16.86	23.51	28.93	4.70	0.00	33.63
2	2483.50	50.21	AV	54	3.79	16.58	28.93	4.70	0.00	33.63
3	2500.00	50.44	PK	74	23.56	16.76	28.96	4.72	0.00	33.68
3	2500.00	--	AV	54	--	--	--	--	--	--
4	4924.00	58.36	PK	74	15.64	53.58	33.71	6.98	35.91	4.78
4	4924.00	49.16	AV	54	4.84	44.38	33.71	6.98	35.91	4.78
5	5130.75	47.47	PK	74	26.53	40.25	34.39	7.11	34.28	7.22
5	5130.75	--	AV	54	--	--	--	--	--	--
6	7386.00	46.45	PK	74	27.55	34.57	37.61	9.25	34.98	11.88
6	7386.00	--	AV	54	--	--	--	--	--	--

REMARKS:

1. Emission level (dBuV/m) =Raw Value (dBuV)+Correction Factor (dB/m)
2. Correction Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
3. Margin value = Limit value- Emission level.
4. -- Mean the PK detector measured value is below average limit.
5. The other emission levels were very low against the limit.
6. RBW1MHz VBW3MHz Peak detector is for PK value; RBW 1MHz VBW10Hz Peak detector is for AV value.

3.3. Maximum Conducted Output Power


Limit

The Maximum Peak Output Power Measurement is 30dBm.

Test Procedure

Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the power sensor.

Test Configuration



Test Results

WIFI				
Type	Channel	Output power (dBm)	Limit (dBm)	Result
802.11b	01	15.74	30.00	Pass
	06	15.26		
	11	15.35		
802.11g	01	13.66	30.00	Pass
	06	13.54		
	11	13.45		
802.11n(HT20)	01	12.69	30.00	Pass
	06	12.58		
	11	12.47		
802.11n(HT40)	03	10.85	30.00	Pass
	06	11.22		
	09	11.24		

Note: 1.The test results including the cable lose.

3.4. Power Spectral Density

Limit

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

Test Procedure

1. Use this procedure when the maximum peak conducted output power in the fundamental emission is used to demonstrate compliance.
2. Set the RBW ≥ 3 kHz.
3. Set the VBW $\geq 3 \times$ RBW.
4. Set the span to 1.5 times the DTS channel bandwidth.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum power level.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.
11. The resulting peak PSD level must be 8dBm.

Test Configuration




Test Results


WIFI				
Type	Channel	Power Spectral Density (dBm/3KHz)	Limit (dBm/3KHz)	Result
802.11b	01	-9.681	8.00	Pass
	06	-9.742		
	11	-9.683		
802.11g	01	-14.457	8.00	Pass
	06	-14.789		
	11	-15.386		
802.11n(HT20)	01	-14.724	8.00	Pass
	06	-15.369		
	11	-15.478		
802.11n(HT40)	03	-19.752	8.00	Pass
	06	-19.356		
	09	-19.409		

Test plot as follows:


802.11b

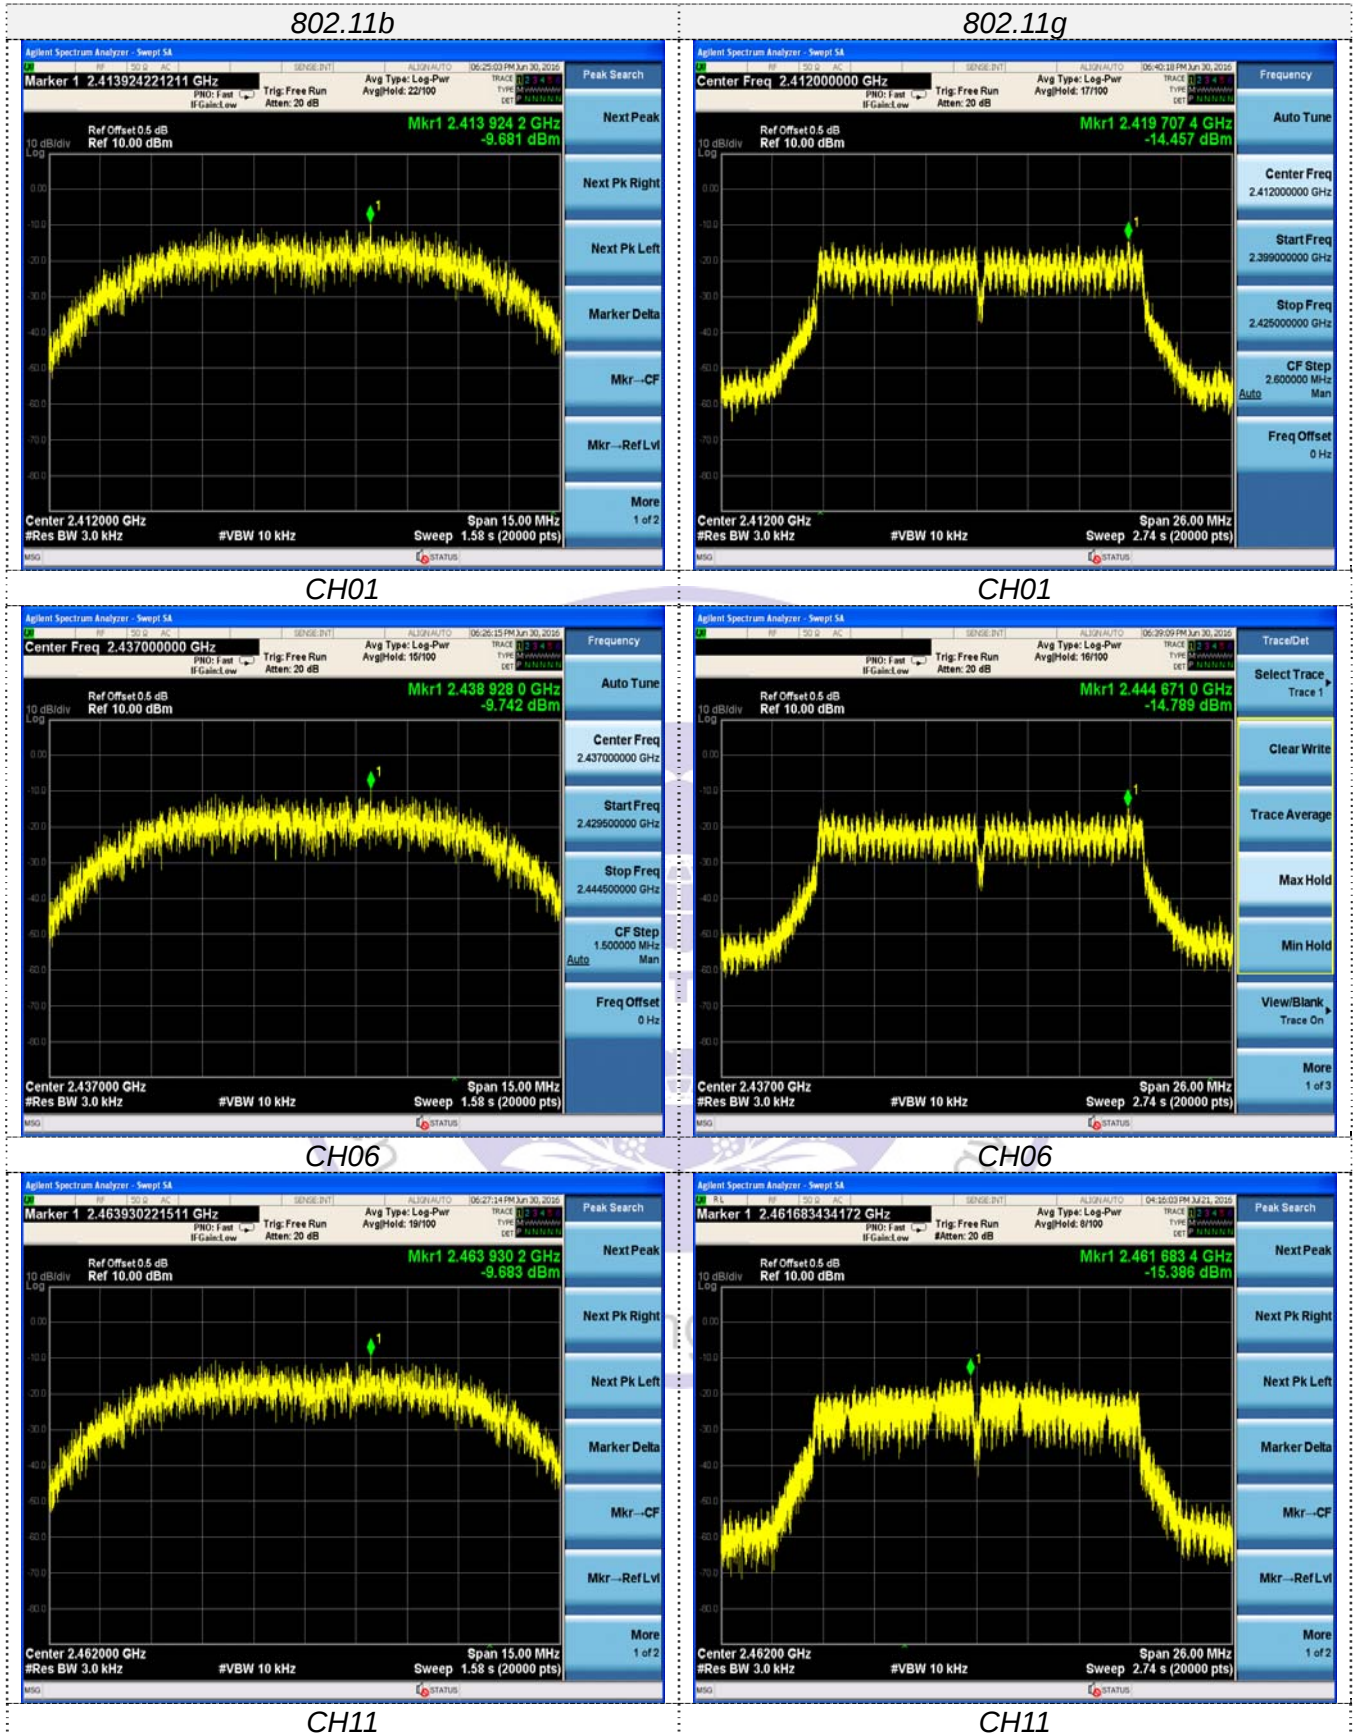


802.11n(HT20)

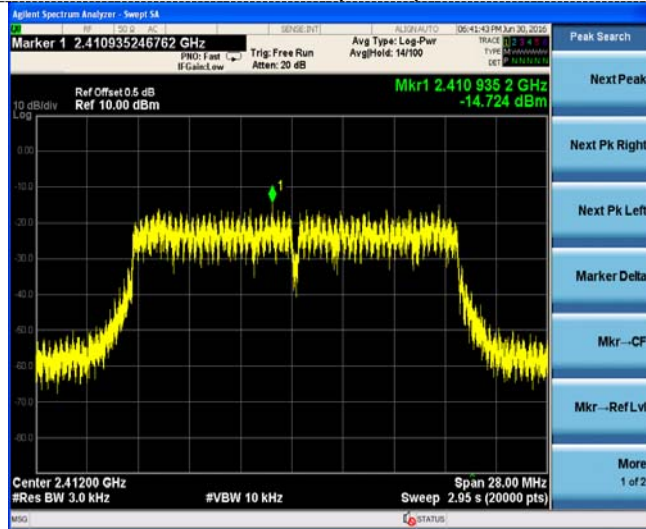


802.11n(HT40)

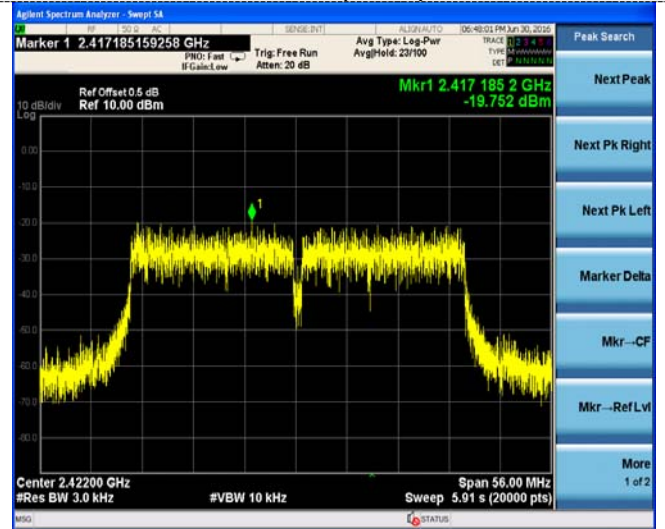


CH01

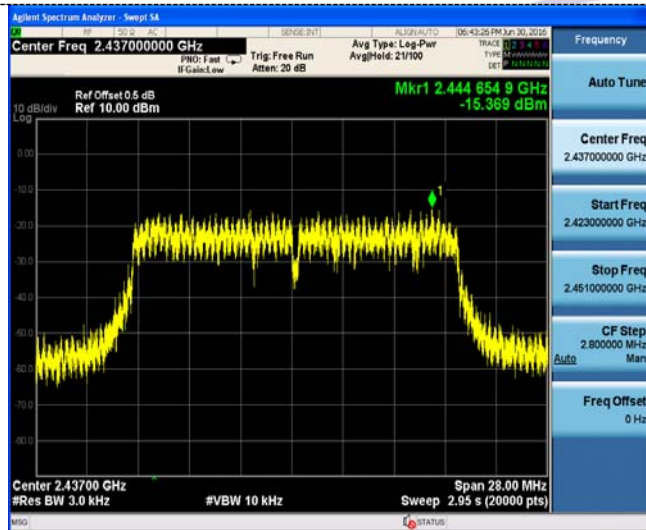


CH03

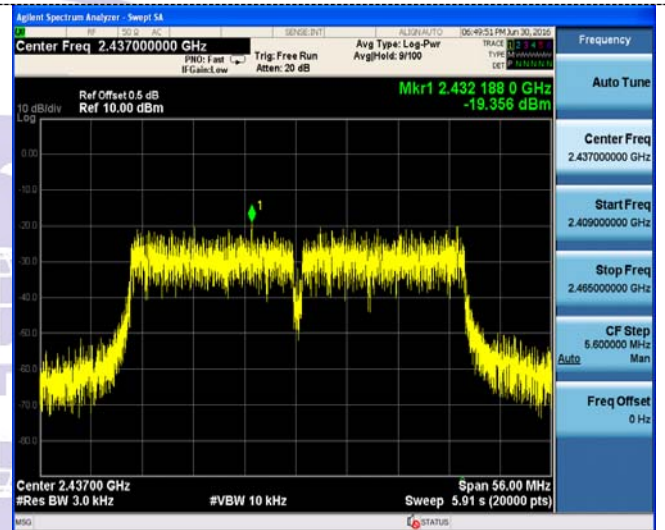

CH06

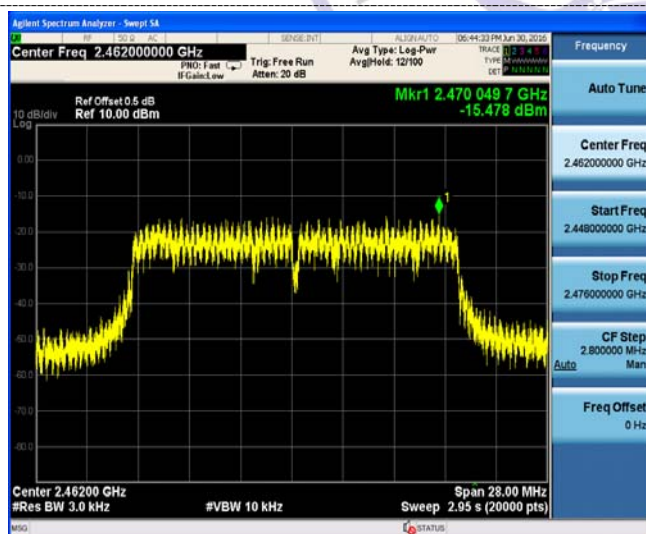

CH06

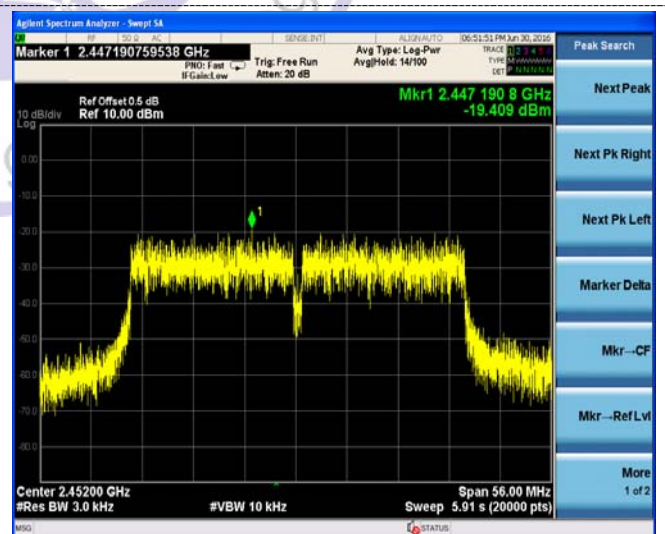

CH11

CH09

3.5. 6dB Bandwidth

Limit

For digital modulation systems, the minimum 6 dB bandwidth shall be at least 500 kHz

Test Procedure

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 100 KHz RBW and 300 KHz VBW. The 6dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6dB.

Test Configuration




Test Results


WIFI				
Type	Channel	6dB Bandwidth (MHz)	Limit (KHz)	Result
802.11b	01	9.654	≥500	Pass
	06	9.187		
	11	9.182		
802.11g	01	16.510	≥500	Pass
	06	16.520		
	11	16.510		
802.11n(HT20)	01	17.670	≥500	Pass
	06	17.670		
	11	17.680		
802.11n(HT40)	03	36.480	≥500	Pass
	06	36.460		
	09	36.470		

Test plot as follows:

802.11b

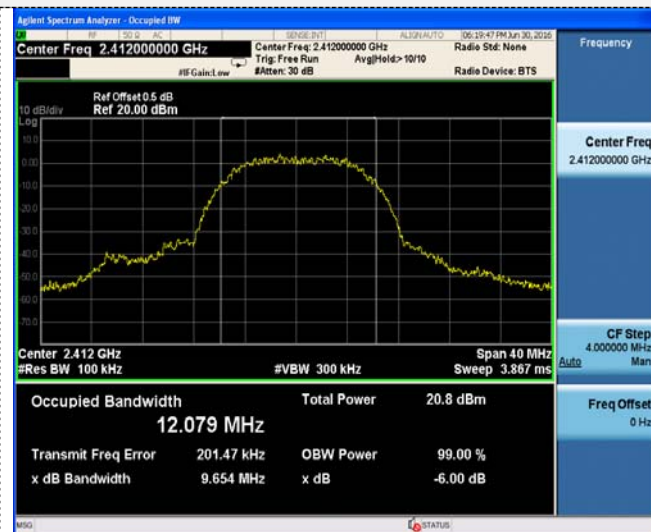


802.11g

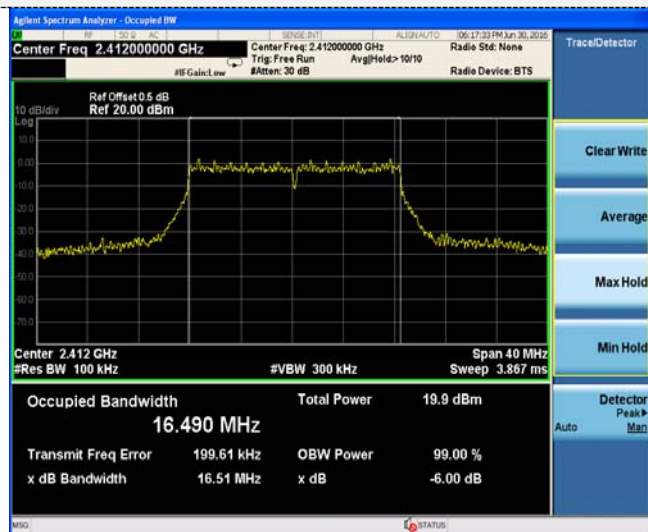

CH01




CH01

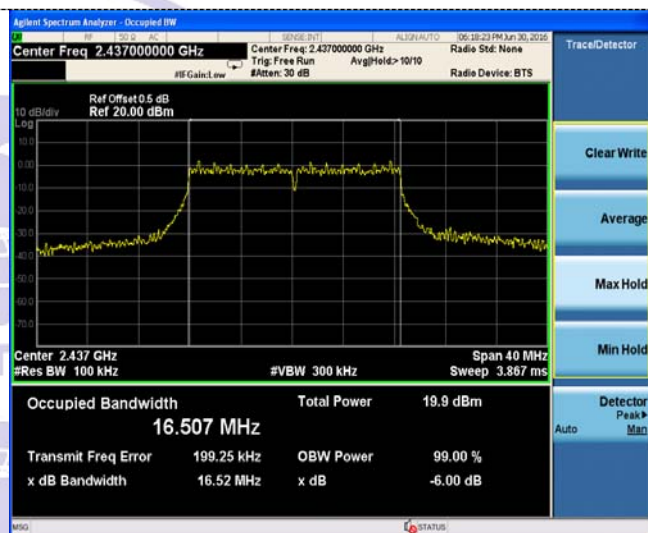

CH06



CH06

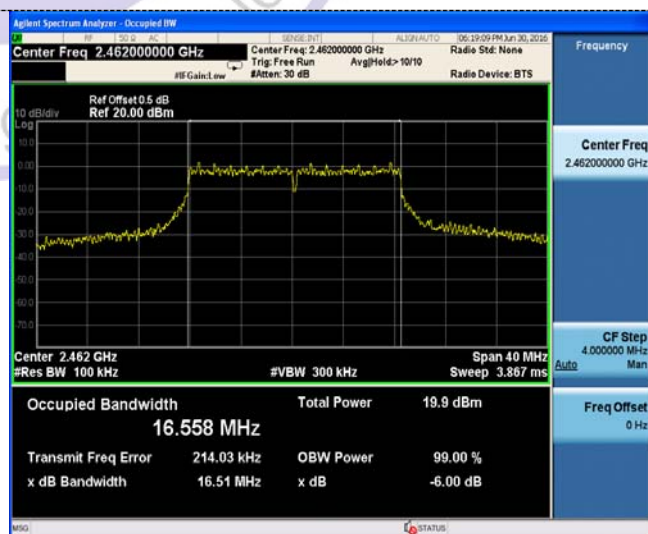


CH11




CH11




802.11n(HT20)

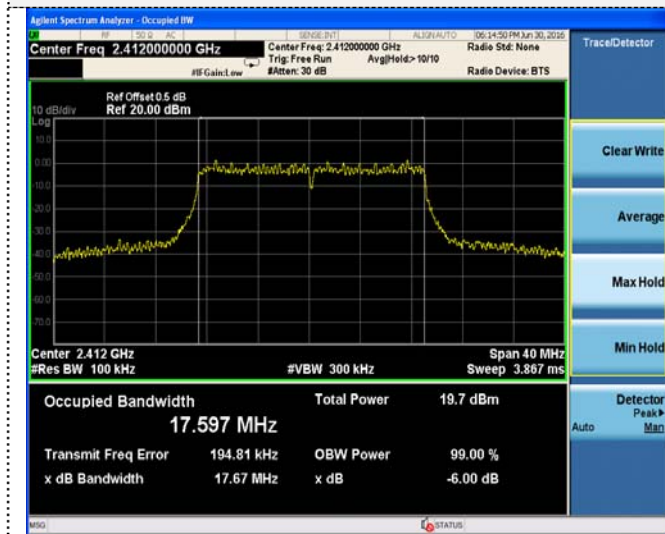


802.11n(HT40)

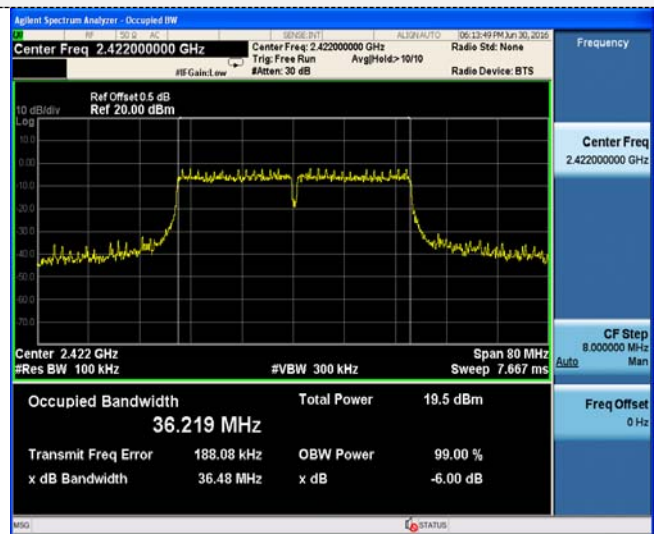


CH01

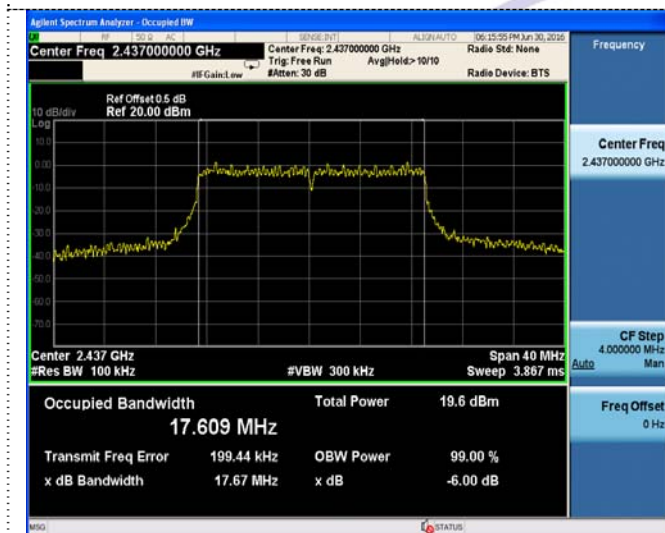


CH03

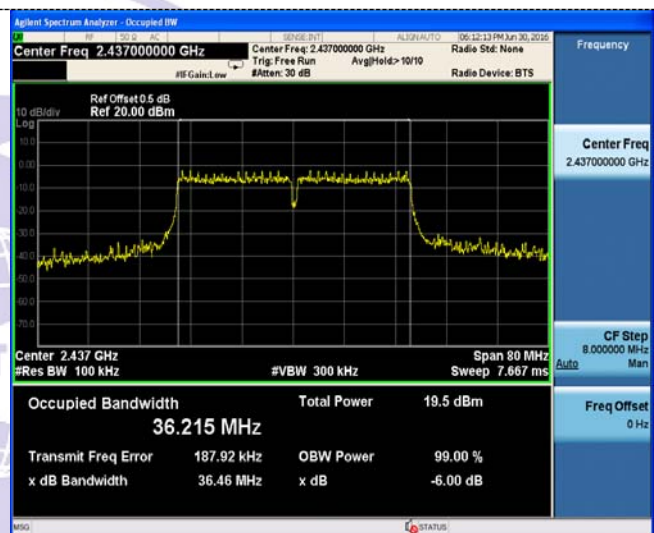

CH06

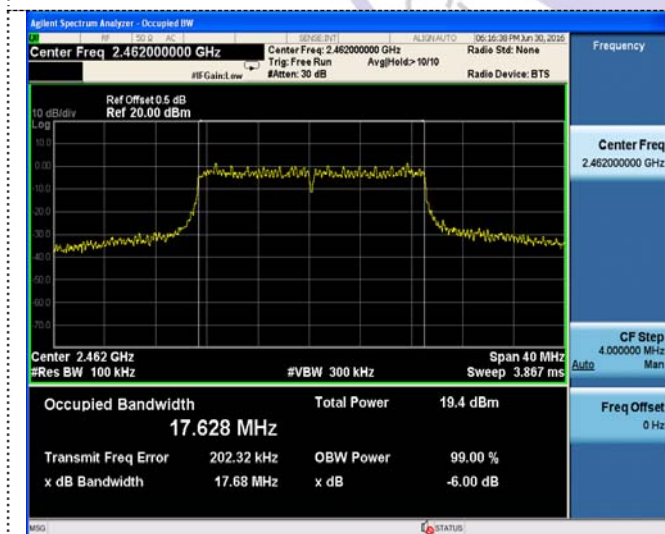

CH06

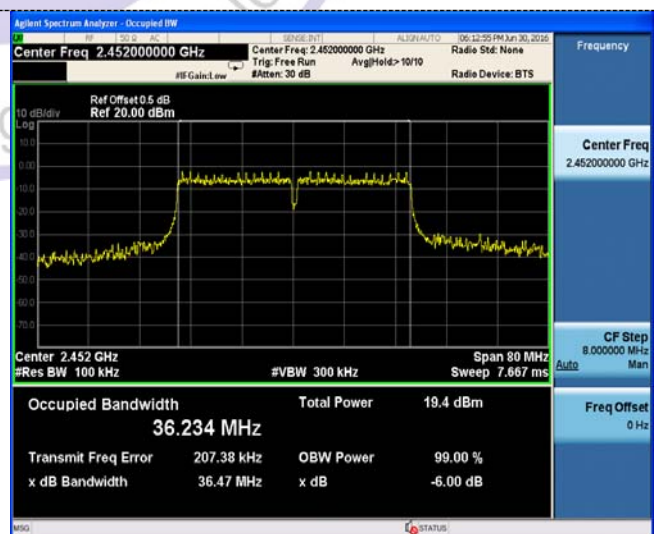

CH11



CH09



3.6. Occupied Bandwidth

Limit

N/A

Test Procedure

The occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5% of the total mean power of the given emission. The following procedure shall be used for measuring 99% power bandwidth:

RBW=1% to 5% of the OBW

VBW=approximately 3 X RBW

Detector=Peak

Trace Mode: Max Hold

Use the 99% power bandwidth function of the instrument to measure the Occupied Bandwidth and recorded.

Test Configuration




Test Results

Type	Channel	99% Bandwidth (MHz)	Limit (KHz)	Result
802.11b	01	12.068	N/A	Pass
	06	12.050		
	11	12.041		
802.11g	01	16.648	N/A	Pass
	06	16.658		
	11	16.848		
802.11n(HT20)	01	17.643	N/A	Pass
	06	17.622		
	11	17.669		
802.11n(HT40)	03	36.368	N/A	Pass
	06	36.414		
	09	36.443		

802.11b




802.11g

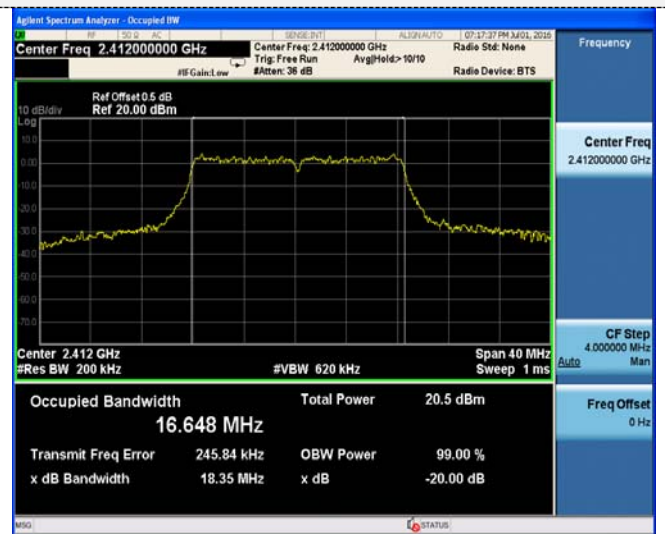

CH01



CH01

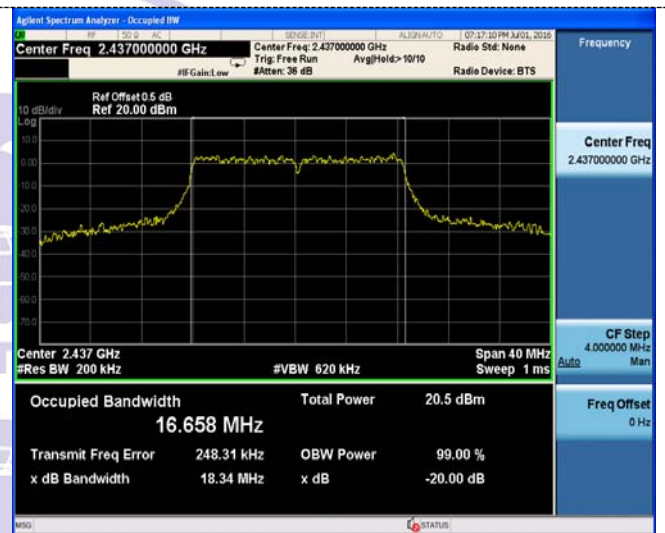

CH06



CH06




CH11




CH11




802.11n(HT20)

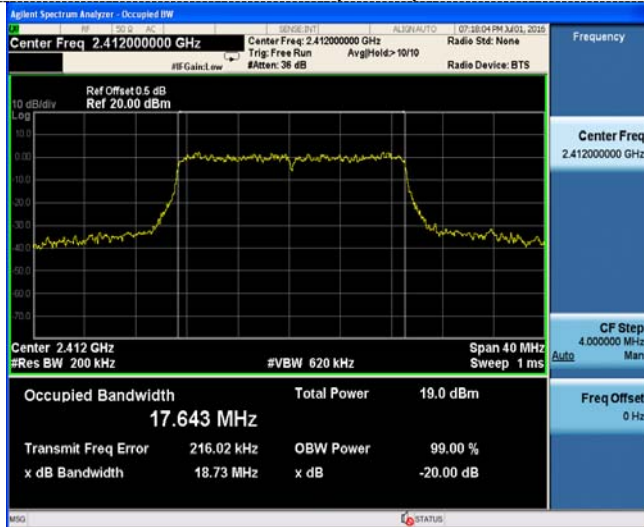

802.11n(HT40)

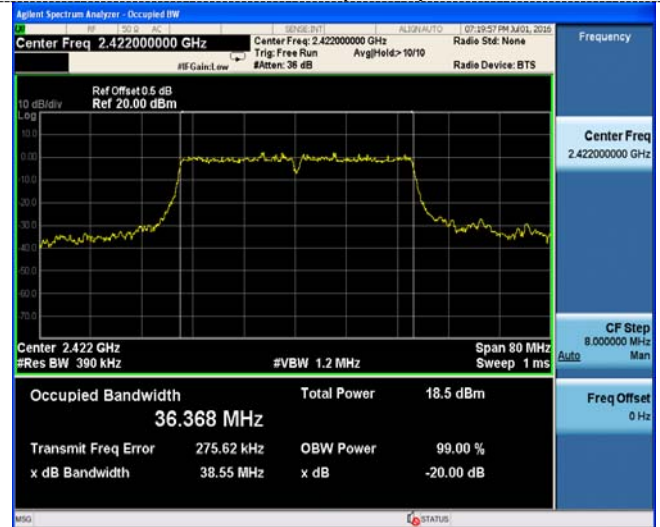


CH01

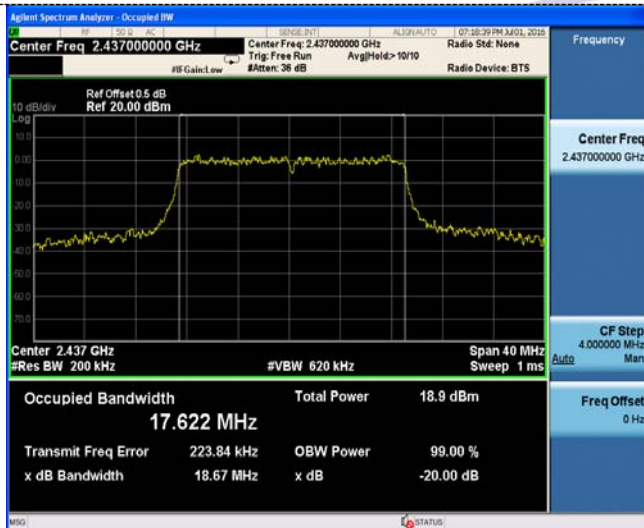


CH03



CH06

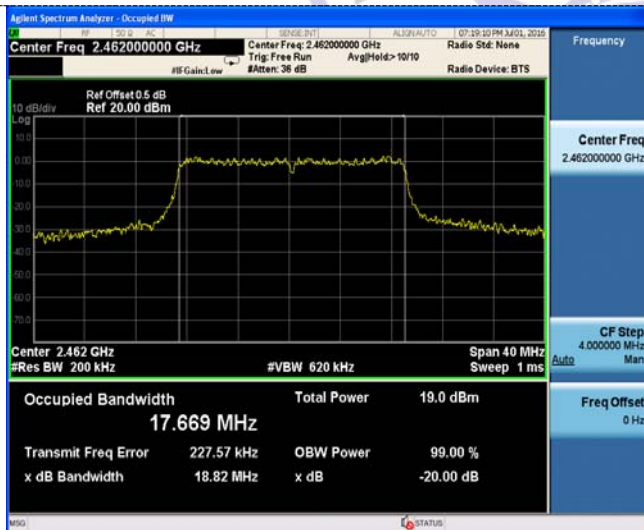

CH06

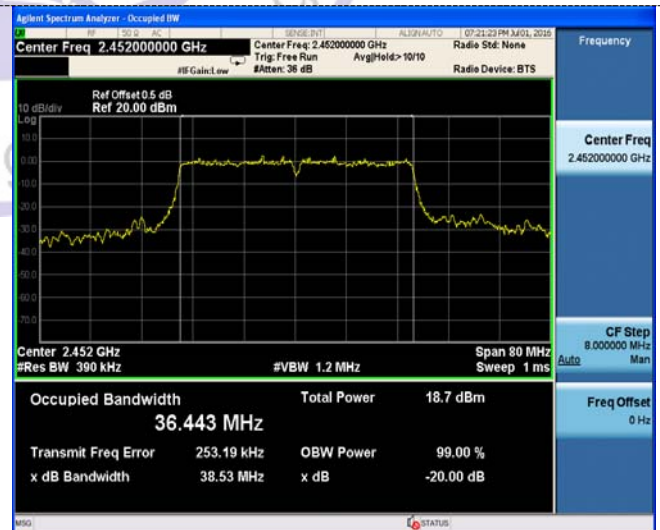

CH11

CH09

3.7. Out-of-band Emissions

Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of root-mean-square averaging over a time interval, as permitted under Section (b)(3) of §15.247 and RSS 5.4(4), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general field strength limits specified in §15.209(a) and RSS-Gen are not required.

Test Procedure

Connect the transmitter output to spectrum analyzer using a low loss RF cable, and set the spectrum analyzer to RBW=100 kHz, VBW= 300 kHz, peak detector , and max hold. Measurements utilizing these setting are made of the in-band reference level, bandedge and out-of-band emissions.

Test Configuration



Test Results



Remark: The measurement frequency range is from 30MHz to the 10th harmonic of the fundamental frequency. The lowest, middle and highest channels are tested to verify the spurious emissions and bandage measurement data.

Test plot as follows:


802.11b



CH01

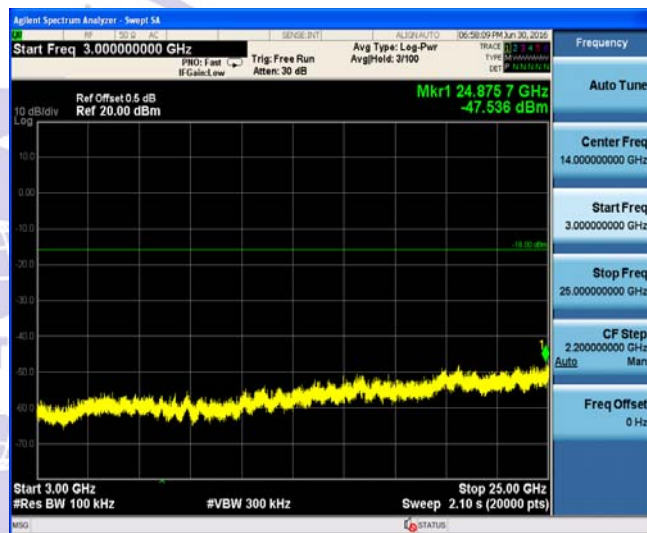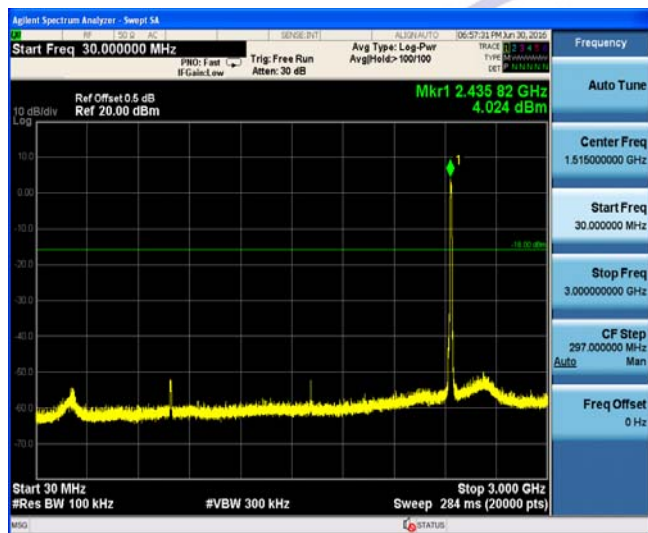


CH06

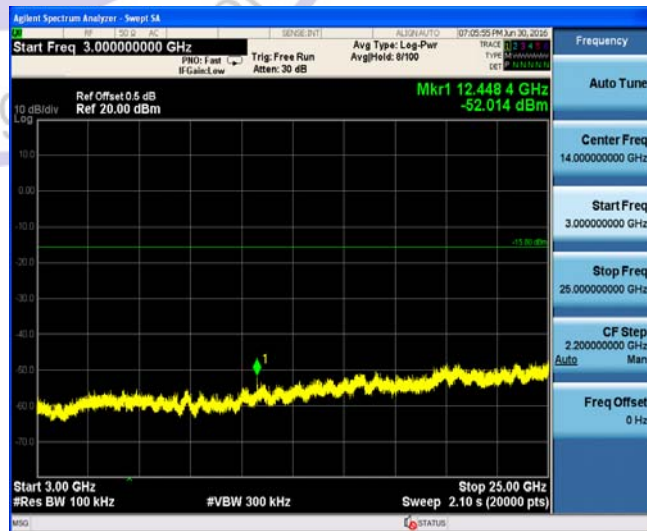

CH11





Left Band edge


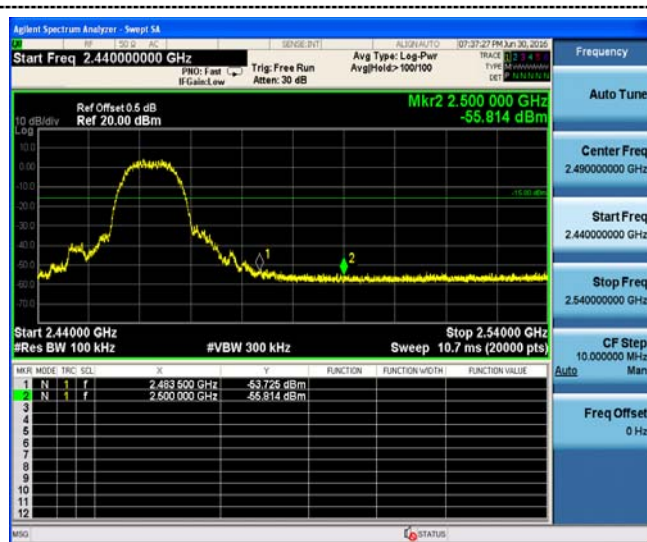


Right Band edge


802.11g

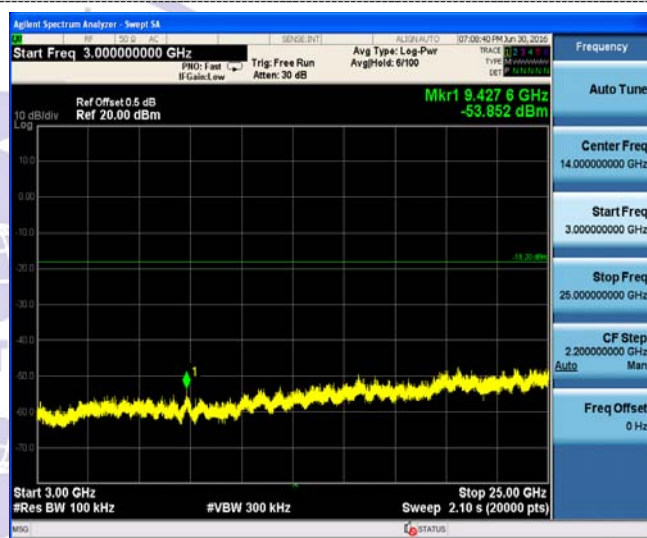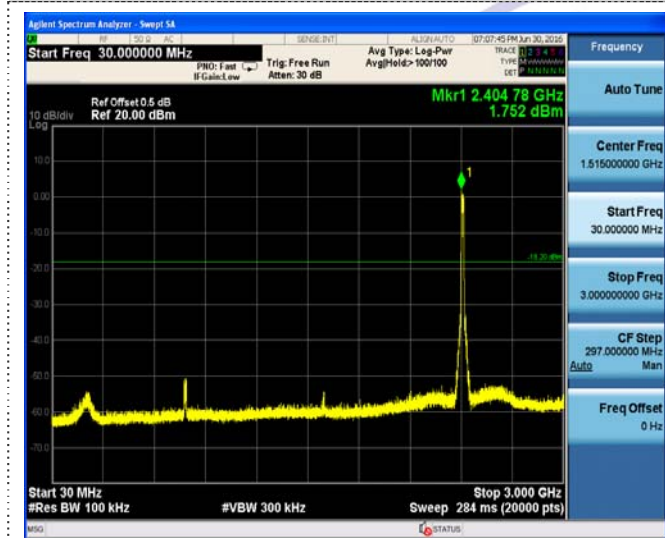

CH01

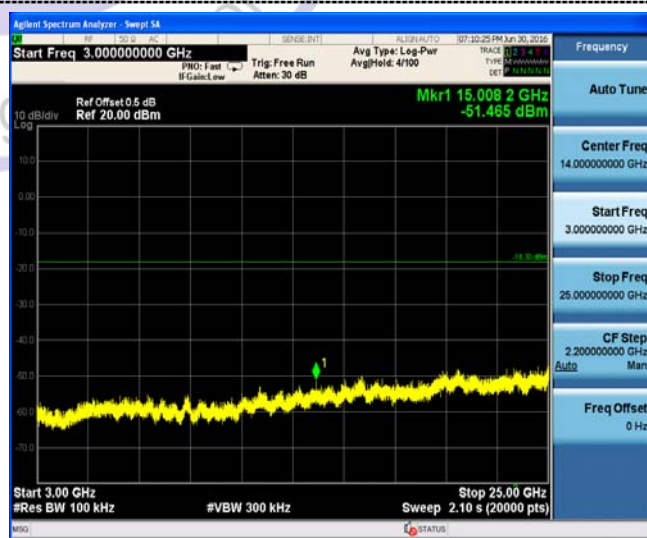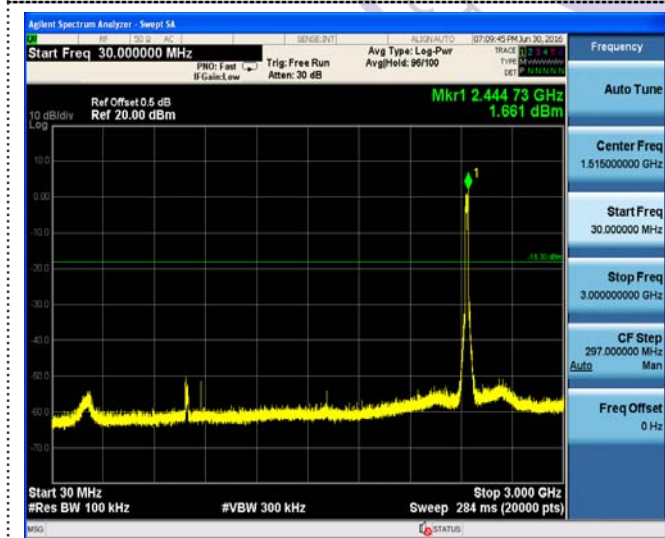

CH06

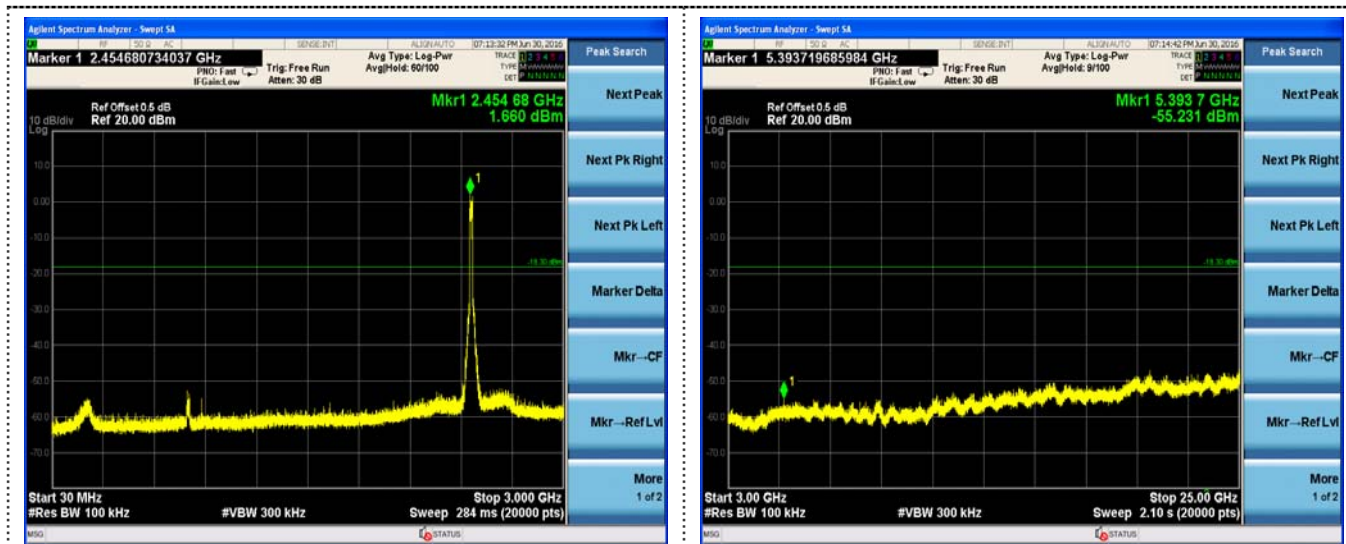


CH11




Left Band edge

Right Band edge


802.11n(HT20)

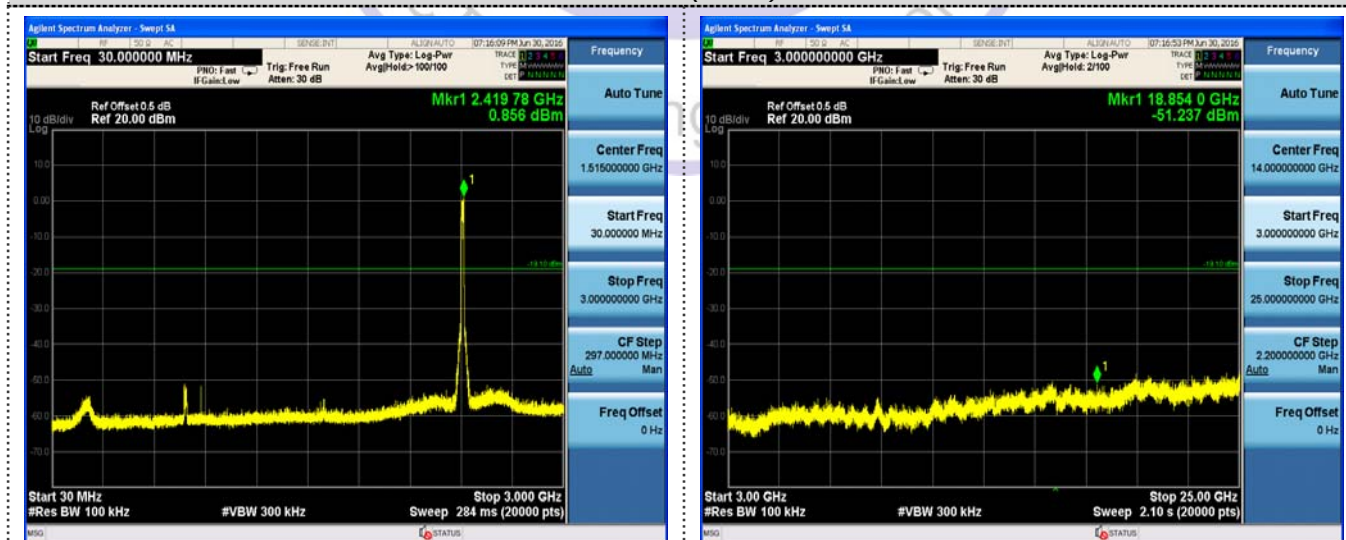


CH01

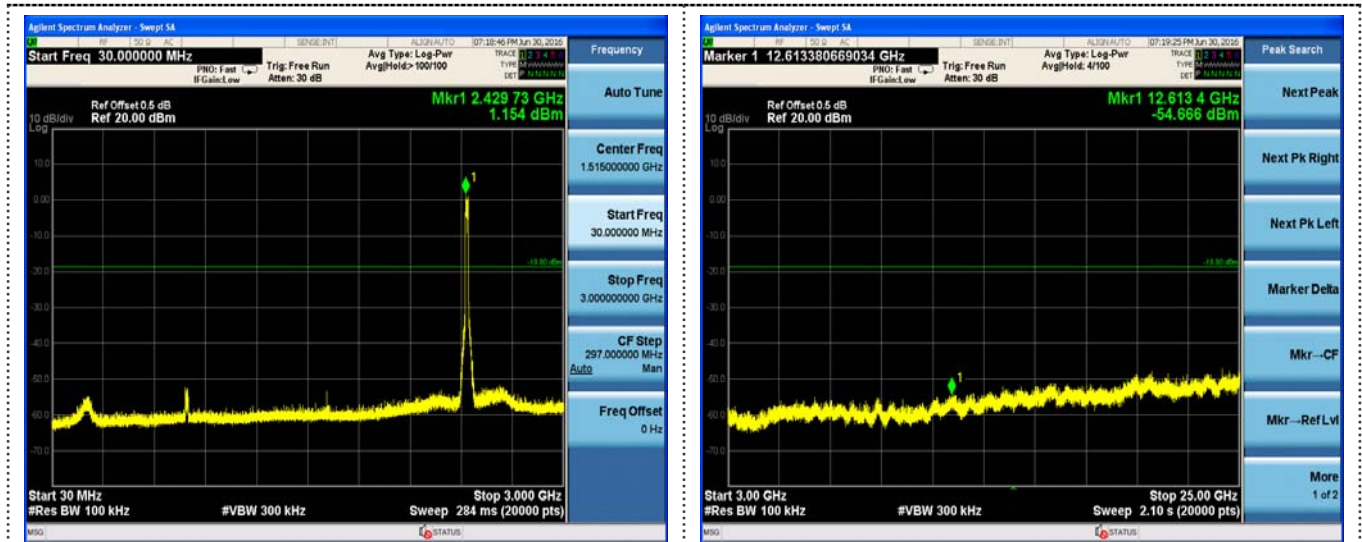

CH06

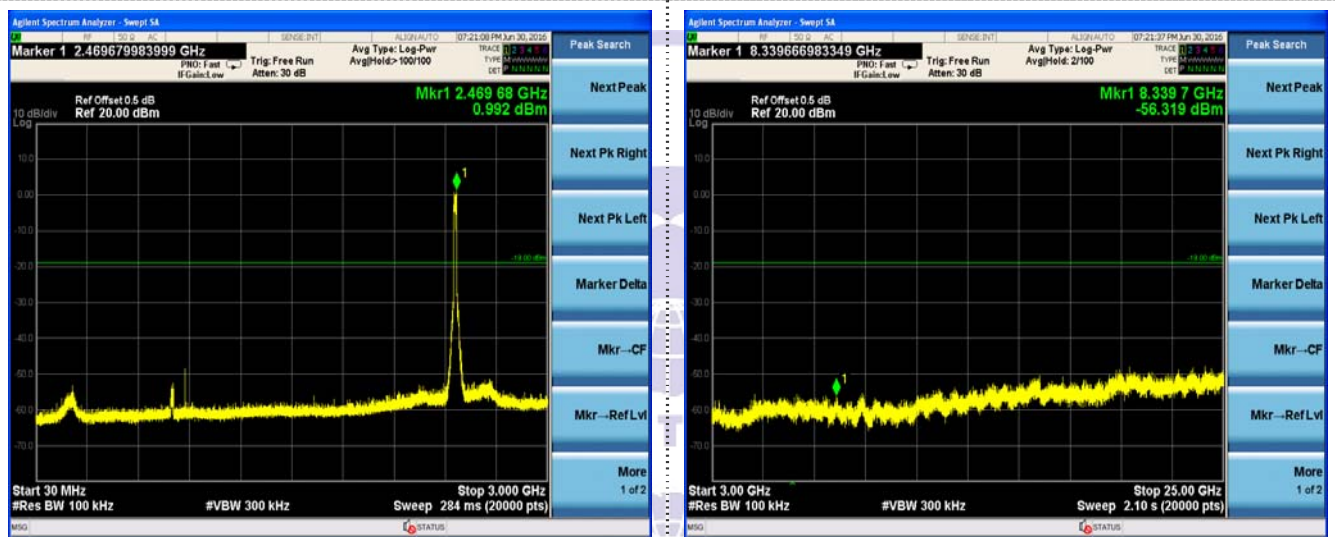



CH11

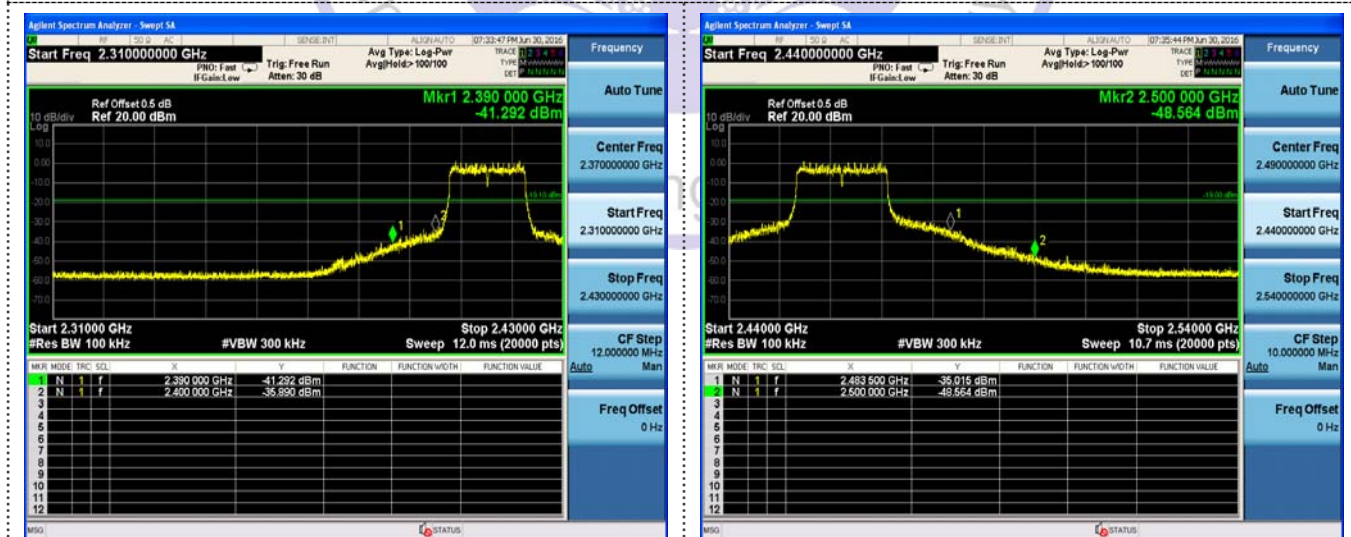



Left Band edge

Right Band edge



802.11n(HT40)

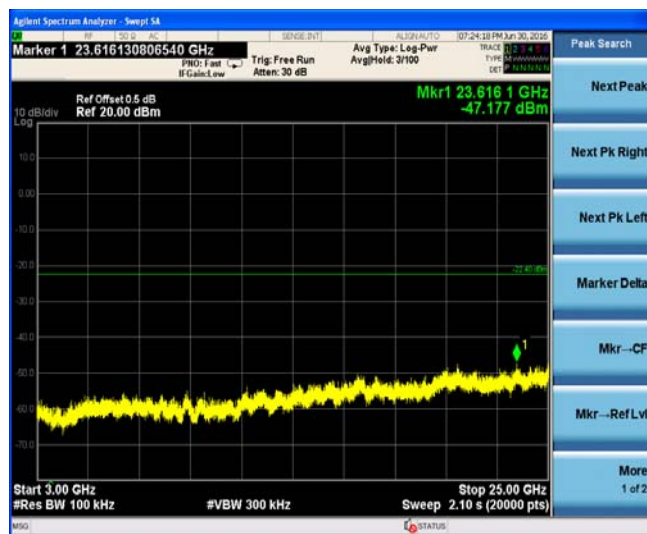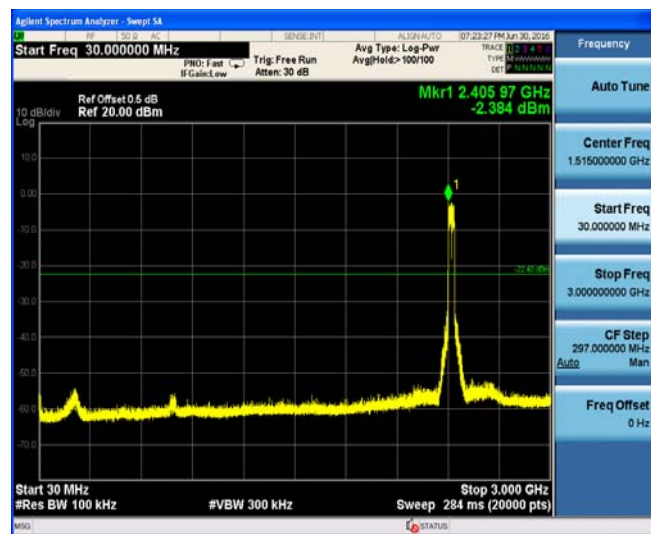

CH01

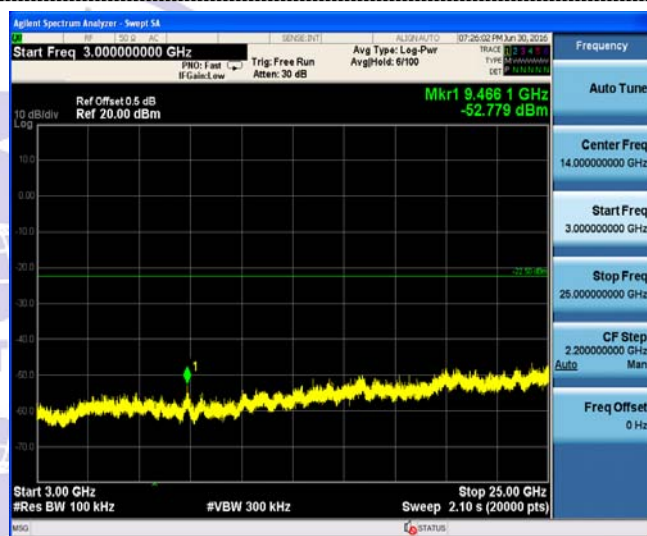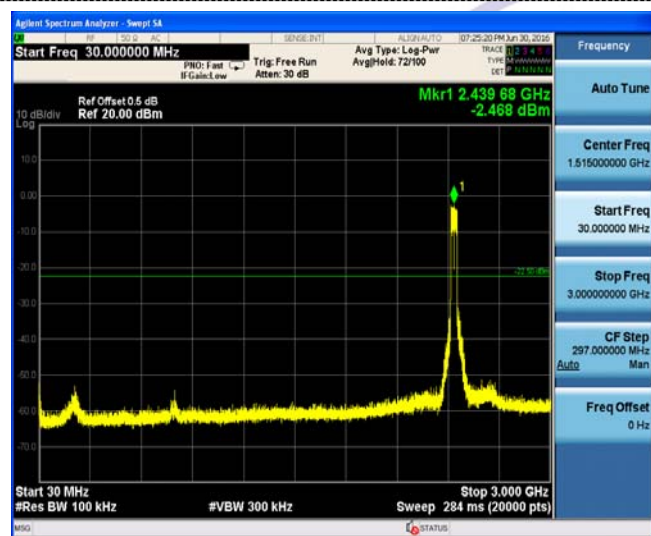

CH06

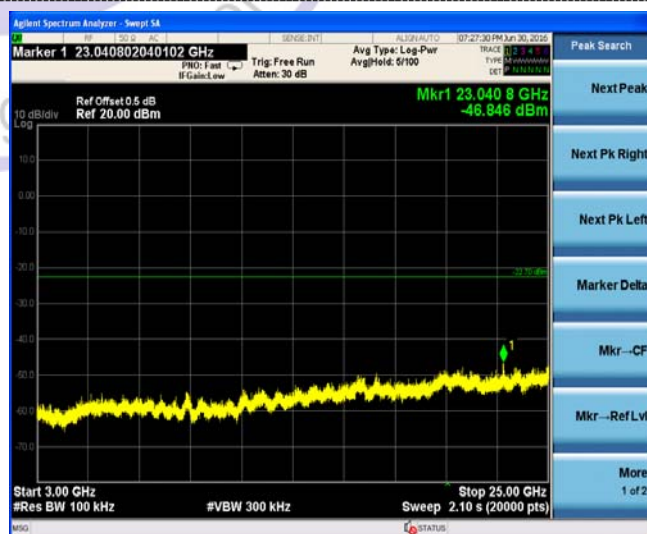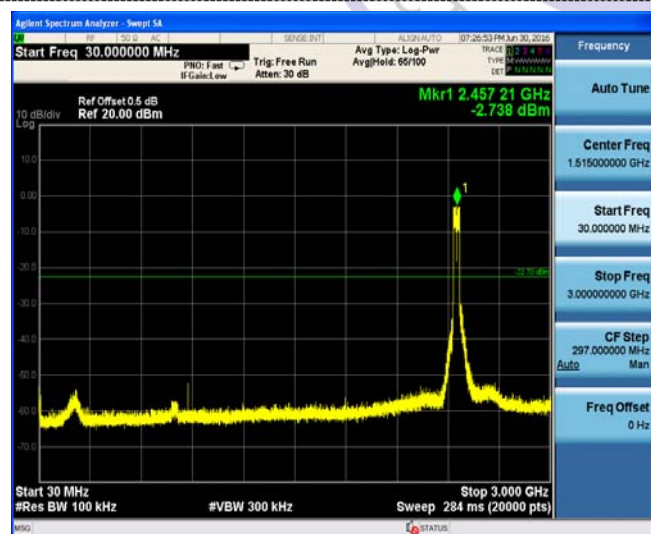

CH11

