



FCC Part 15, Subpart C Test Report

FCC ID: 2AGJ43KIW

Applicant: Specialty Technologies, LLC

Address: 340 Victoria Rd Youngstown Ohio 44515 United States

Manufacturer: Specialty Technologies, LLC

Address: 340 Victoria Rd Youngstown Ohio 44515 United States

Product(s): Subwoofer Amplifier

Brand(s): **SVS**_(SVS)

Test Model(s): 3000 In-Wall Subwoofer Amplifier

Series Model(s): N/A

Test Date: Jan. 18, 2022~May. 06, 2022

Issued Date: Jun. 07, 2022

Issued By: Hwa-Hsing (Dongguan) Testing Co., Ltd.

Address: No.101, Bld. N1, Yuyuan 2Rd, Yuyuan Industrial Park, HuangJiang Town, Dongguan, China

Test Firm Registration No.: 915896

Designation No.: CN1255

Standards: 47 CFR FCC Part 15, Subpart C (Section 15.247)
ANSI C63.10:2013

The above equipment has been tested by **Hwa-Hsing (Dongguan) Testing Co., Ltd.**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

Prepared by :

Tank Tan

Reviewed by :

Scott He

Approved by :

Harry Li

This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into the account to declare the compliance or non-compliance to the specification. The report must not be used by the client to claim product certification, approval, or endorsement by A2LA or any agency of the federal government. The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any government agencies.



Table of Contents

- Release Control Record 4**
- 1. Summary of Test Results 5**
 - 1.1 Measurement Uncertainty 5
 - 1.2 Modification Record 5
- 2. General Information 6**
 - 2.1 General Description of EUT 6
 - 2.2 Description of Test Channels 7
 - 2.3 Test Mode Applicability and Tested Channel Detail 7
 - 2.4 Description of Support Units 9
 - 2.5 Configuration of System under Test 9
 - 2.6 Duty Cycle of Test Signal 9
- 3. Test Types and Results 10**
 - 3.1 Radiated Emission and Band-edge Measurement 10
 - 3.1.1 Limits of radiated emission and band-edge measurement 10
 - 3.1.2 Test Instruments 11
 - 3.1.3 Test Procedures 12
 - 3.1.4 Deviation from Test Standard 13
 - 3.1.5 Test Setup 14
 - 3.1.6 EUT Operating Conditions 15
 - 3.1.7 Test Results 16
 - 3.2 Conducted Emission Measurement 23
 - 3.2.1 Limits of Conducted Emission Measurement 23
 - 3.2.2 Test Instruments 23
 - 3.2.3 Test Procedures 23
 - 3.2.4 Deviation from Test Standard 23
 - 3.2.5 Test setup 24
 - 3.2.6 EUT Operating Conditions 24
 - 3.2.7 Test Results 25
 - 3.3 6dB Bandwidth Measurement 27
 - 3.3.1 Limits of 6dB Bandwidth Measurement 27
 - 3.3.2 Test Setup 27
 - 3.3.3 Test Instruments 27
 - 3.3.4 Test Procedure 28
 - 3.3.5 Deviation from Test Standard 28
 - 3.3.6 EUT Operating Conditions 28
 - 3.3.7 Test Result 28
 - 3.4 Occupied Bandwidth Measurement 30
 - 3.4.1 Test Setup 30
 - 3.4.2 Test Instruments 30
 - 3.4.3 Test Procedure 30
 - 3.4.4 Deviation from Test Standard 30
 - 3.4.5 EUT Operating Conditions 30
 - 3.4.6 Test Results 30
 - 3.5 Conducted Output Power Measurement 32
 - 3.5.1 Limits of Conducted Output Power Measurement 32
 - 3.5.2 Test Setup 32
 - 3.5.3 Test Instruments 32
 - 3.5.4 Test Procedures 32
 - 3.5.5 Deviation from Test Standard 33
 - 3.5.6 EUT Operating Conditions 33
 - 3.5.7 Test Results 34
 - 3.6 Power Spectral Density Measurement 37



3.6.1	Limits of Power Spectral Density Measurement.....	37
3.6.2	Test Setup	37
3.6.3	Test Instruments	37
3.6.4	Test Procedure	37
3.6.5	Deviation from Test Standard.....	38
3.6.6	EUT Operating Condition	38
3.6.7	Test Results.....	39
3.7	Conducted Out of Band Emission Measurement	41
3.7.1	Limits of Conducted Out of Band Emission Measurement.....	41
3.7.2	Test Setup	41
3.7.3	Test Instruments	41
3.7.4	Test Procedure	42
3.7.5	Deviation from Test Standard.....	42
3.7.6	EUT Operating Condition	42
3.7.7	Test results	43
4.	Pictures of Test Arrangements	47
5.	Test Instruments.....	48
	Appendix – Information on The Testing Laboratories.....	49



HWA-HSING Test Report No.: 211223EL14-RF-US-01

Release Control Record

Issue No.	Description	Date Issued
211223EL14-RF-US-01	Original Release	Jun. 07, 2022



1. Summary of Test Results

47 CFR FCC Part 15, Subpart C (Section 15.247) KDB 558074 D01 15.247 Meas Guidance v05r02 ANSI C63.10:2013			
Clause	Test Item	Result	Remarks
15.207	AC Power Conducted Emission	Pass	Meet the requirement of limit.
15.205 & 209	Radiated Emissions	Pass	Meet the requirement of limit.
15.247(d)	Band Edge Measurement	Pass	Meet the requirement of limit.
15.247(d)	Antenna Port Emission	Pass	Meet the requirement of limit.
15.247(a)(2)	6dB Bandwidth	Pass	Meet the requirement of limit.
---	Occupied Bandwidth Measurement	Pass	Reference only
15.247(b)	Conducted power	Pass	Meet the requirement of limit.
15.247(e)	Power Spectral Density	Pass	Meet the requirement of limit.
15.203	Antenna Requirement	Pass	No antenna connector is used. The device is professionally installed

Note: The EUT has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC). The test report has been issued separately.

1.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

The listed uncertainties are the worst cases uncertainty for the entire range of measurement. Please note that the uncertainty values are provided for informational purposes only and are not used in determining the PASS/FAIL results.

Measurement	Frequency	Expanded Uncertainty (k=2) (±)
Conducted Emissions at mains ports	150kHz ~ 30MHz	2.66 dB
Radiated Emissions up to 1 GHz	9KHz ~ 30MHz	2.16 dB
	30MHz ~ 1000MHz	3.47 dB
Radiated Emissions above 1 GHz	1GHz ~ 18GHz	4.84 dB
	18GHz ~ 40GHz	4.67 dB

1.2 Modification Record

There were no modifications required for compliance.



2. General Information

2.1 General Description of EUT

Product(s)	Subwoofer Amplifier
Test Model(s)	3000 In-Wall Subwoofer Amplifier
Sample No.	HS220308-01-03
Series Model(s)	N/A
Status of EUT	Engineering Prototype
Power Supply Rating	100V-120V~, 50-60Hz, 800W
Modulation Type	GFSK for DTS
Transfer Rate	1 Mbps
Operating Frequency	2402 ~ 2480MHz
Number of Channel	40
Maximum Output Power	6.754dBm (Peak)
Antenna Type	FPC Antenna
Antenna Gain	3.48dBi Maximum peak Gain
Antenna Connector	I-PEX
Accessory Device	N/A
Data Cable Supplied	AC Lines: 1.5m

Note:

1. Please refer to the EUT photo document (Reference No.: 211223EL14-1&-2) for detailed product photo.
2. The above EUT information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or User's Manual.



2.2 Description of Test Channels

40 channels are provided to this EUT:

Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)
0	2402	10	2422	20	2442	30	2462
1	2404	11	2424	21	2444	31	2464
2	2406	12	2426	22	2446	32	2466
3	2408	13	2428	23	2448	33	2468
4	2410	14	2430	24	2450	34	2470
5	2412	15	2432	25	2452	35	2472
6	2414	16	2434	26	2454	36	2474
7	2416	17	2436	27	2456	37	2476
8	2418	18	2438	28	2458	38	2478
9	2420	19	2440	29	2460	39	2480

2.3 Test Mode Applicability and Tested Channel Detail

EUT Configure Mode	Applicable test items	X-Axis	Y-Axis	Z-Axis	Voltage Supply
Radiated	AC Power Conducted Emission	N/A	N/A	N/A	AC120/60Hz
Radiated	Radiated Emissions	√	√	√	
Antenna Port Conducted Measurement	Band Edge Measurement	N/A	N/A	N/A	
	Antenna Port Emission	N/A	N/A	N/A	
	6dB Bandwidth	N/A	N/A	N/A	
	Occupied Bandwidth Measurement	N/A	N/A	N/A	
	Conducted power	N/A	N/A	N/A	
	Power Spectral Density	N/A	N/A	N/A	

- *: The EUT had been pre-tested on the positioned of each 3 Axis. The worst case was found when positioned on **Z-plane**.
- "N/A" means no effect.

Test Condition:

Applicable test items	Environmental Conditions	Test date	Tested by
AC Power Conducted Emission	24.3deg. C, 54%RH	2022-4-27	Jim Xu
Radiated Emissions	23deg. C, 45%RH	2022-4-25	Jim Xu
Antenna Port Conducted Measurement	26deg. C, 69%RH	2022-4-29	Dragon Long

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture). Following channel(s) was (were) selected for the final test as listed below.



Radiated Emission Test (Above 1GHz):

EUT Configure Mode	Available Channel	Tested Channel	Modulation Type	Data Rate (Mbps)
-	0 to 39	0, 19, 39	GFSK	1

Radiated Emission Test (Below 1GHz):

EUT Configure Mode	Available Channel	Tested Channel	Modulation Type	Data Rate (Mbps)
-	0 to 39	39	GFSK	1

Power Line Conducted Emission Test:

EUT Configure Mode	Available Channel	Tested Channel	Modulation Type	Data Rate (Mbps)
-	0 to 39	39	GFSK	1

Antenna Port Conducted Measurement:

*This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.

EUT Configure Mode	Available Channel	Tested Channel	Modulation Type	Data Rate (Mbps)
-	0 to 39	0, 19, 39	GFSK	1



2.4 Description of Support Units


The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

No.	Product	Brand	Model No.	Serial No.	FCC ID
1.	Notebook	DELL	Latitude 5300	N/A	N/A

Insert Cable Connections to/from EUT provided by test team.


No.	Signal Cable Description of The Above Support Units
1.	USB serial cable Un-shielding 1.2m

2.5 Configuration of System under Test

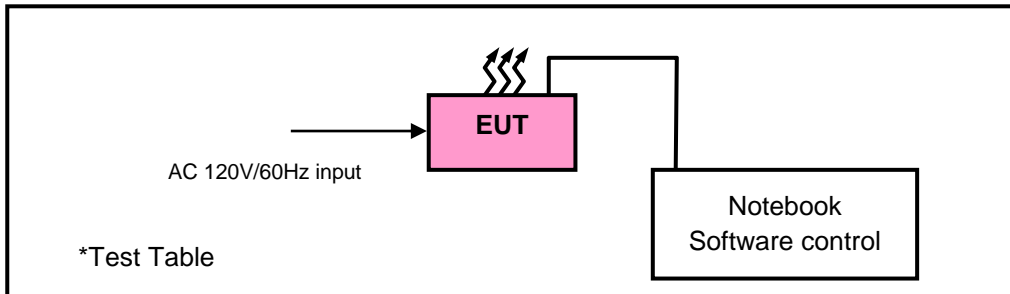

2.6 Duty Cycle of Test Signal

Test Mode	Channel	Duty Cycle [%]
GFSK-1MHz	2402	62.90
	2440	62.90
	2480	62.90

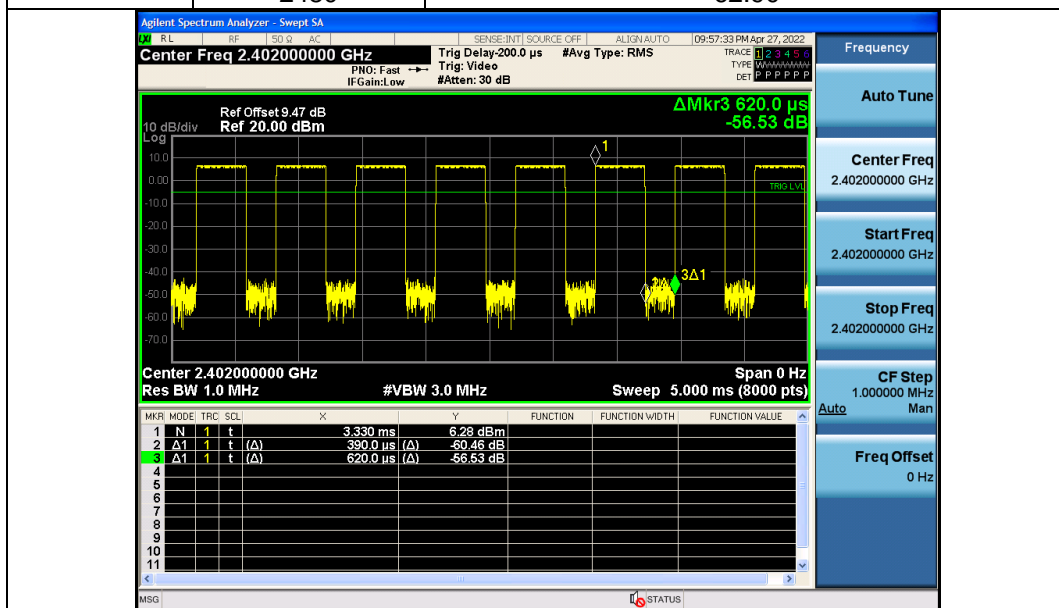



3. Test Types and Results

3.1 Radiated Emission and Band-edge Measurement

3.1.1 Limits of radiated emission and band-edge measurement

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 20dB below the highest level of the desired power:

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

* DTS emissions in non-restricted frequency bands Subclause 11.11 of ANSI C63.10 is applicable.
* DTS emissions in restricted frequency bands Subclause 11.12 of ANSI C63.10 is applicable

Note:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.



3.1.2 Test Instruments

Radiated emission below 30MHz:

Equipment	Manufacturer	Model No.	Serial No.	Next Cal.
EMI Test Receiver	Rohde&Schwarz	ESR7	100962	2023-01-13
3m Semi-anechoic Chamber	MAORUI	9m*6m*6m	NSEMC003	2023-04-15*
Test software	FARAD	FARAD	EZ_EMCV1.1.4.2	N/A
Loop Antenna	EMCI	HLA 6121	56735	2023-04-15*
Preamplifier	EMCI	EMC001340	980201	2022-09-08
Antenna Tower	MF	MFA-440H	NA	NA
Turn Table	MF	MFT-201SS	NA	NA
Antenna Tower&Turn Table Controller	MF	MF-7802	NA	NA

Frequency Range below 1GHz:

Equipment	Manufacturer	Model No.	Serial No.	Next Cal.
3m Semi-anechoic Chamber	MAORUI	9m*6m*6m	NSEMC003	2023-04-15*
EMI Test Receiver	Rohde&Schwarz	ESR7	100962	2023-01-13
Broadband antenna	Schwarzbeck	VULB 9168	00937	2023-09-12*
Signal Amplifier	Com-power	PAM-103	18020051	2022-09-08
Attenuator	Rohde&Schwarz	TS2GA-6dB	18101101	N/A
Test software	FARAD	FARAD	EZ_EMCV1.1.4.2	N/A

Frequency Range 1-18GHz:

Equipment	Manufacturer	Model No.	Serial No.	Next Cal.
3m Semi-anechoic Chamber	MAORUI	9m*6m*6m	NSEMC003	2023-04-15*
Horn Antenna	Schwarzbeck	BBHA 9120D	01959	2022-09-12*
Broadband Coaxial Preamplifier	Com-power	PAM-118A	1804003	2022-09-07
Spectrum	Keysight	N9020A	MY51240612	2022-09-08
Antenna Tower	MF	MFA-440H	NA	NA
Turn Table	MF	MFT-201SS	NA	NA
Antenna Tower&Turn Table Controller	MF	MF-7802	NA	NA

Frequency Range 18-40GHz:

Equipment	Manufacturer	Model No.	Serial No.	Next Cal.
3m Semi-anechoic Chamber	MAORUI	9m*6m*6m	NSEMC003	2023-04-15*
Spectrum Analyzer	Rohde&Schwarz	FSV-40N	101783	2023-01-13
Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170242	2023-04-10*
Pre-Amplifier	EMCI	EMC 184045	980102	2023-01-12
Antenna Tower	MF	MFA-440H	NA	NA
Turn Table	MF	MFT-201SS	NA	NA
Antenna Tower&Turn Table Controller	MF	MF-7802	NA	NA

Note:

1. The calibration interval of the above test instruments is 12 months or 24 months (*).
2. The test was performed in 966.



3.1.3 Test Procedures

a. **Peak emission levels are measured by setting the instrument as follow:**

1) RBW & VBW setting as a function of frequency:

Frequency	RBW	VBW
9kHz~150kHz	200Hz	600Hz
0.15MHz~30MHz	9kHz	30kHz
30MHz~1000MHz	120kHz	300kHz
>1000MHz	1MHz	3MHz

- 2) Detector = peak.
- 3) Sweep time = auto.
- 4) Trace mode = max hold.
- 5) Allow sweeps to continue until the trace stabilizes. (Note that the required measurement time may be lengthened for low-duty-cycle applications.)

Note: If the peak-detected amplitude can be shown to comply with the average limit, then it is not necessary to perform a separate average measurement

b. **Average emission levels are measured by setting the instrument as follow:**

● **Trace averaging with continuous EUT transmission at full power**

If the EUT can be configured or modified to transmit continuously (D ≥ 98%), then the average emission levels shall be measured using the following method (with EUT transmitting continuously):

- 1) RBW=1 MHz (unless otherwise specified).
- 2) VBW ≥ 3 *RBW.
- 3) Detector =RMS
- 4) Sweep time = auto.
- 5) Perform a trace average of at least 100 traces.

● **Trace averaging across ON and OFF times of the EUT transmissions followed by duty cycle correction**

If continuous transmission of the EUT (D ≥ 98%) cannot be achieved and the duty cycle is constant (duty cycle variations are less than ±2%), then the following procedure shall be used

- 1) The EUT shall be configured to operate at the maximum achievable duty cycle.
- 2) Measure the duty cycle D of the transmitter output signal as described in 11.6.
- 3) RBW=1 MHz (unless otherwise specified).
- 4) VBW ≥ 3 *RBW.
- 5) Detector =RMS
- 6) Sweep time = auto.
- 7) Perform a trace average of at least 100 traces.

A correction factor shall be added to the measurement results prior to comparing with the emission limit to compute the emission level that would have been measured had the test been performed at 100% duty cycle. The correction factor is computed as follows:

*If power averaging (rms) mode was used in step 5). then the applicable correction factor is [10 10g (1/ D)], where D is the duty cycle.

**If linear voltage averaging mode was used in step f). then the applicable correction factor is [20 10g (1/D)], where D is the duty cycle.

***If a specific emission is demonstrated to be continuous (D > 98%) rather than turning ON and OFF with the transmit cycle, then no duty cycle correction is required for that



● **Reduced VBW Averaging across ON and OFF times of the EUT transmissions with max hold**

If continuous transmission of the EUT ($D > 98\%$) cannot be achieved and the duty cycle is not constant (duty cycle variations exceed $\pm 2\%$), then the following procedure shall be used:

- 1) RBW = 1 MHz.
 - 2) VBW $\geq 1/T$.
 - 3) Detector =peak
 - 4) Sweep time = auto.
 - 5) Trace mode = max hold.
 - 6) Allow max hold to run for at least $[50 \times (1/ D)]$ traces
- c. The EUT was placed on the top of a rotating table 0.8 meters (below 1GHz) / 1.5 meters (1-18GHz) / 1.5 meters (18-40GHz) above the reference ground. The table was rotated 360 degrees to determine the position of the highest radiation.
- d. The EUT was set 3 meters away from the interference-receiving antenna (Below 1GHz) & (Above 1-18GHz), which was mounted on the top of a variable-height antenna tower. The EUT was set 1meters away from the interference-receiving antenna (18-40GHz).
- e. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- f. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- g. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- h. The test-receiver system was set to peak and average detected function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

Note:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz & 360kHz for Quasi-peak detection (QP) at frequency below 1 GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth =3 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth =1/T for Average (Duty cycle < 98 %) detection at frequency above 1 GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is =10Hz (Duty cycle $\geq 98\%$) for Average detection (AV) at frequency above 1GHz.
5. All modes of operation were investigated and the worst-case emissions are reported.


3.1.4 Deviation from Test Standard

No deviation.




3.1.5 Test Setup

Radiated emission below 30MHz:

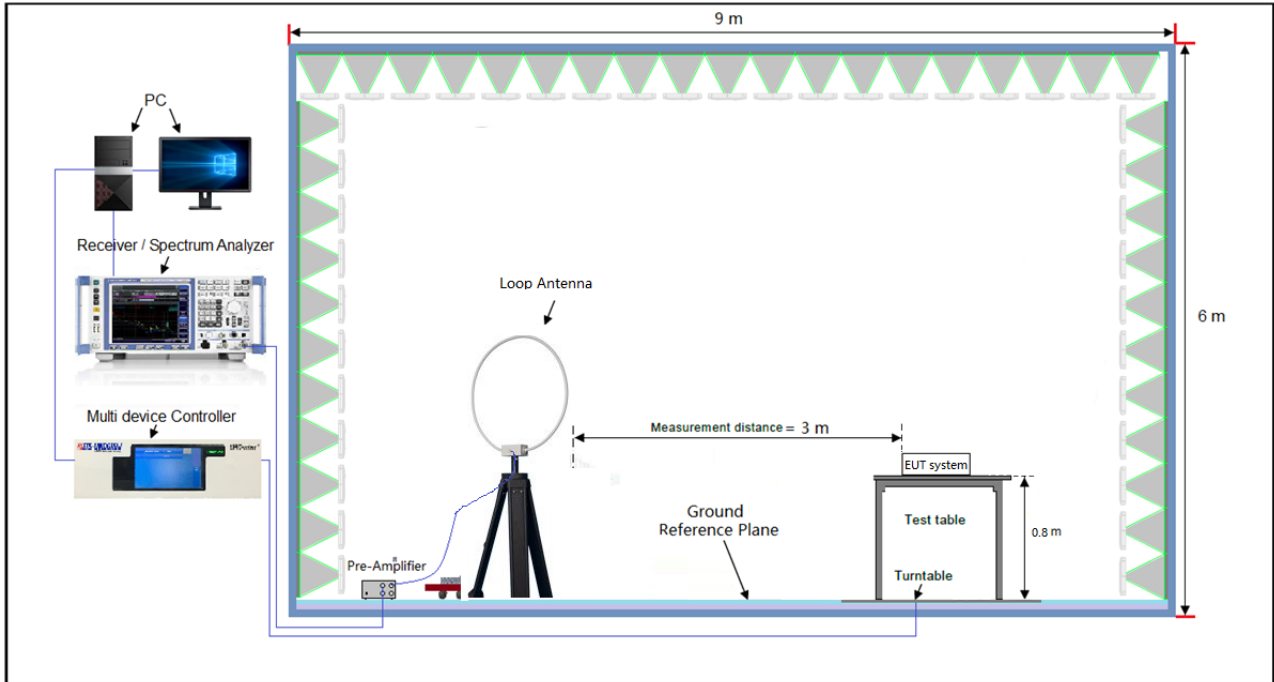


Frequency Range below 1GHz:

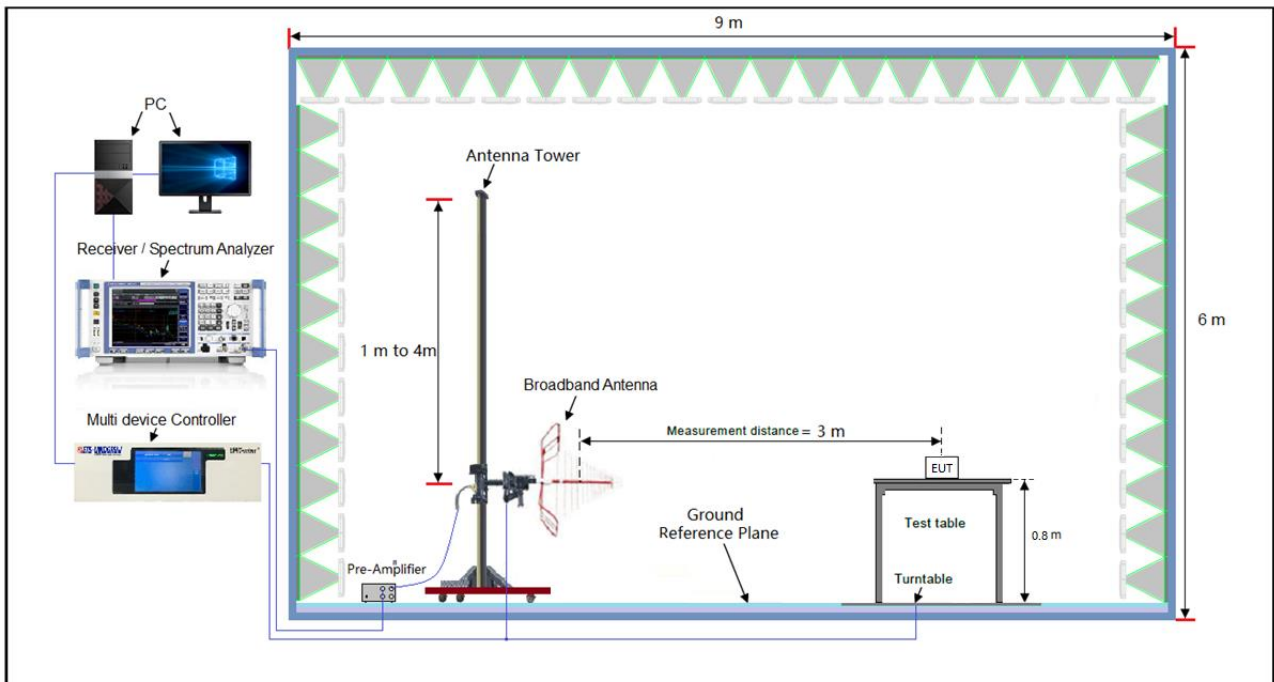




Frequency Range 1-18GHz:

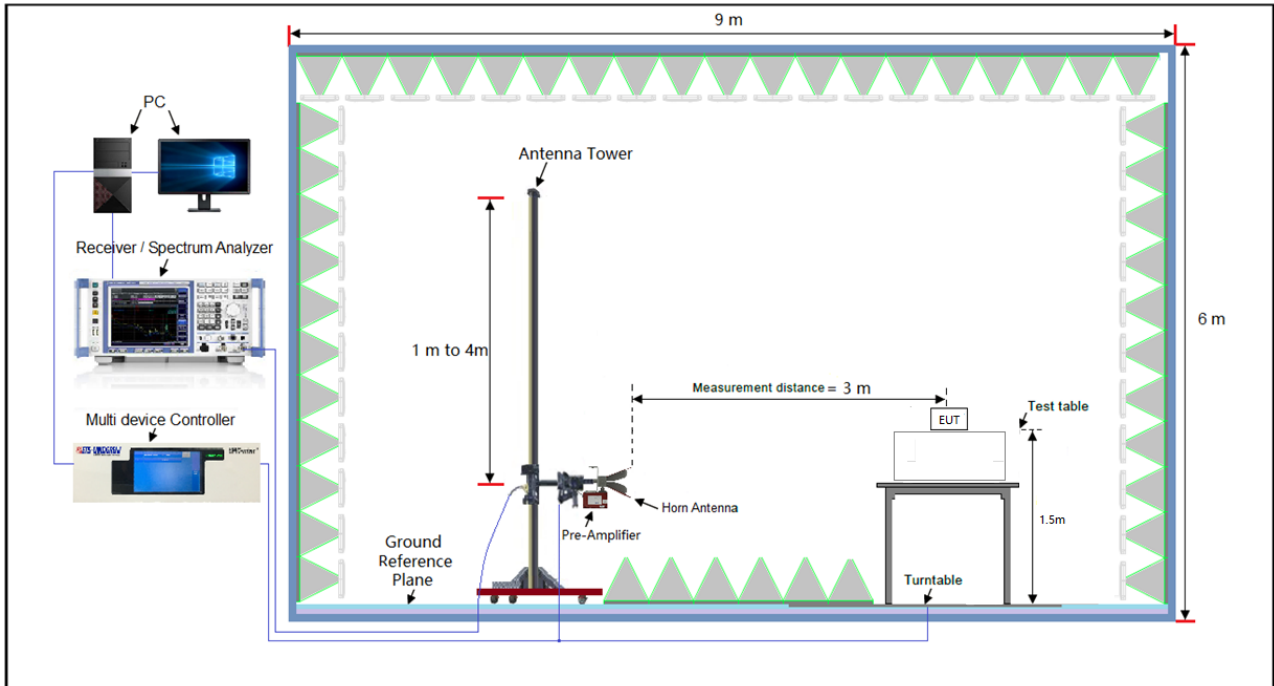

Frequency Range 18-40GHz:

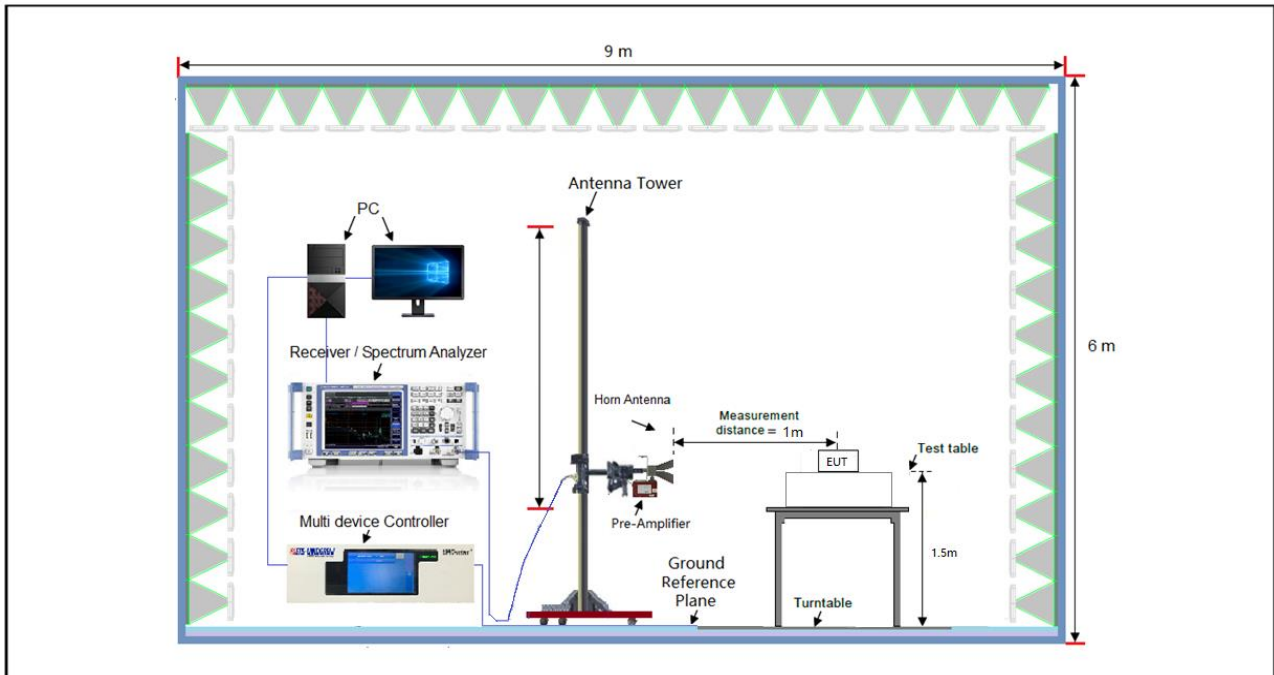

For the actual test configuration, please refer to the attached file (Test Setup Photo).

3.1.6 EUT Operating Conditions

- a. Placed the EUT on the testing table.
- b. Set the EUT under transmission condition continuously at specific channel frequency.



3.1.7 Test Results


9kHz ~ 30MHz Data:

The amplitude of spurious emissions attenuated more than 20dB below the permissible value is not required to be report.

30MHz ~ 1GHz Worst-Case Data:

Test Channel	Channel 0	Frequency Range	30MHz ~ 1GHz
Detector Function	Peak (PK) Quasi-peak (QP)	Tested By	Jim Xu

Antennal Polarity & Test Distance: Horizontal at 3m

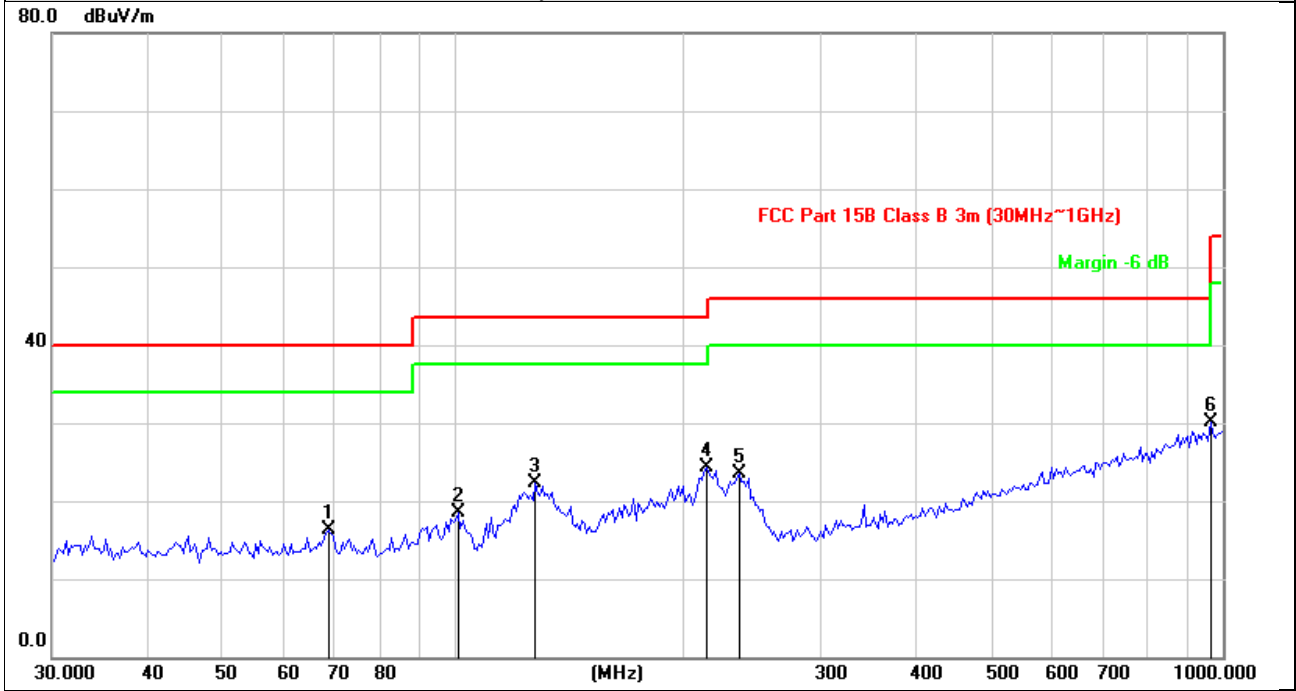

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Antenna Height (cm)	Table Angle (Degree)
1	68.7450	33.27	-17.05	16.22	40.00	-23.78	peak	100	100
2	101.1797	35.90	-17.38	18.52	43.50	-24.98	peak	200	255
3	127.5865	37.99	-15.78	22.21	43.50	-21.29	peak	200	240
4	213.1035	40.70	-16.34	24.36	43.50	-19.14	peak	100	130
5	235.1346	39.14	-15.68	23.46	46.00	-22.54	peak	100	300
6	965.4742	30.16	-0.09	30.07	54.00	-23.93	peak	120	250


Remarks:

1. Emission Level = Read Level + Factor (Antenna Factor + Cable Loss - Preamp Factor)
2. Margin value = Emission level – Limit value



Test Channel	Channel 0	Frequency Range	30MHz ~ 1GHz
Detector Function	Peak (PK) Quasi-peak (QP)	Tested By	Jim Xu

Antennal Polarity& Test Distance: Vertical at 3m

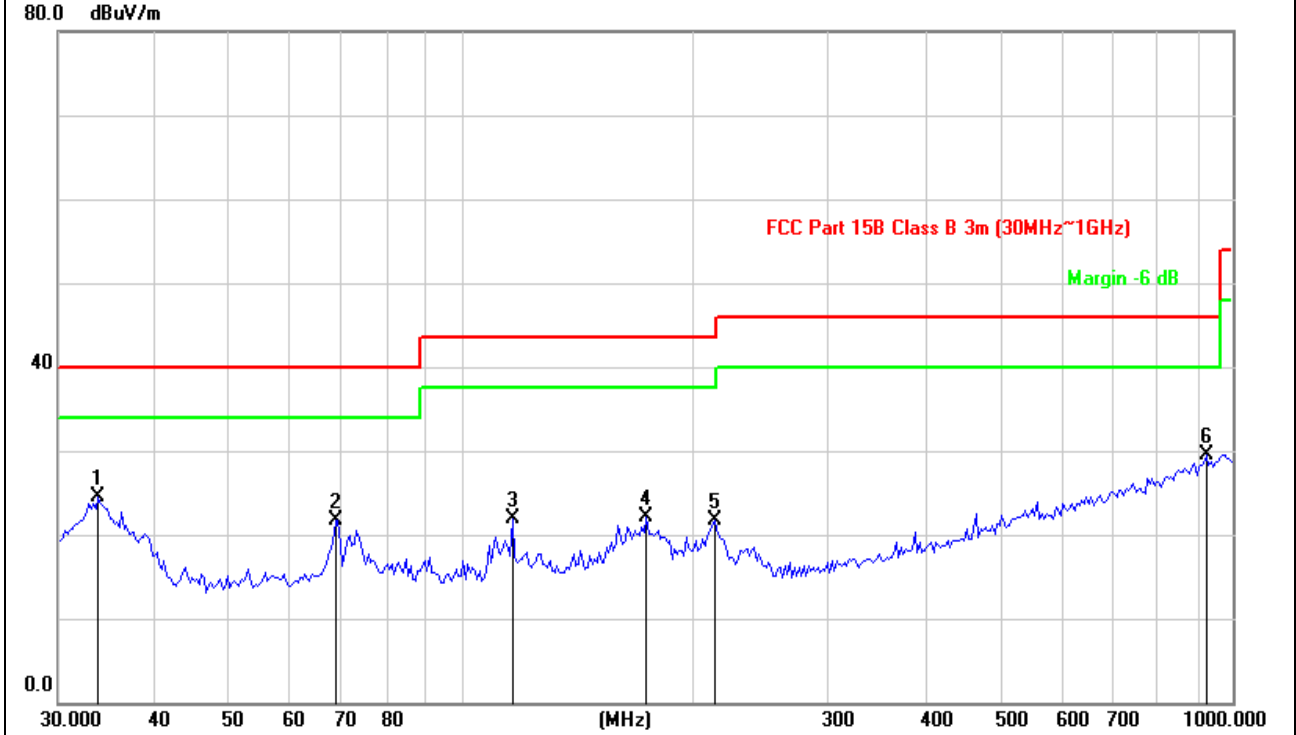

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Antenna Height (cm)	Table Angle (Degree)
1	33.8067	41.29	-16.79	24.50	40.00	-15.50	peak	100	210
2	68.7450	38.82	-17.05	21.77	40.00	-18.23	peak	150	145
3	116.4476	38.39	-16.40	21.99	43.50	-21.51	peak	200	155
4	173.8146	35.29	-13.18	22.11	43.50	-21.39	peak	100	230
5	213.1035	38.01	-16.34	21.67	43.50	-21.83	peak	100	300
6	925.6132	30.00	-0.57	29.43	46.00	-16.57	peak	150	164

Remarks:


1. Emission Level = Read Level + Factor (Antenna Factor + Cable Loss - Preamp Factor)
2. Margin value = Emission level – Limit value



Above 1GHz Data:
BLE-1Mbps

Test channel	Channel 0	Frequency Range	1GHz ~ 25GHz
Detector Function	Peak (PK) Average (AVG)	Tested By	King Ye

Antennal Polarity& Test distance: Horizontal at 3 M

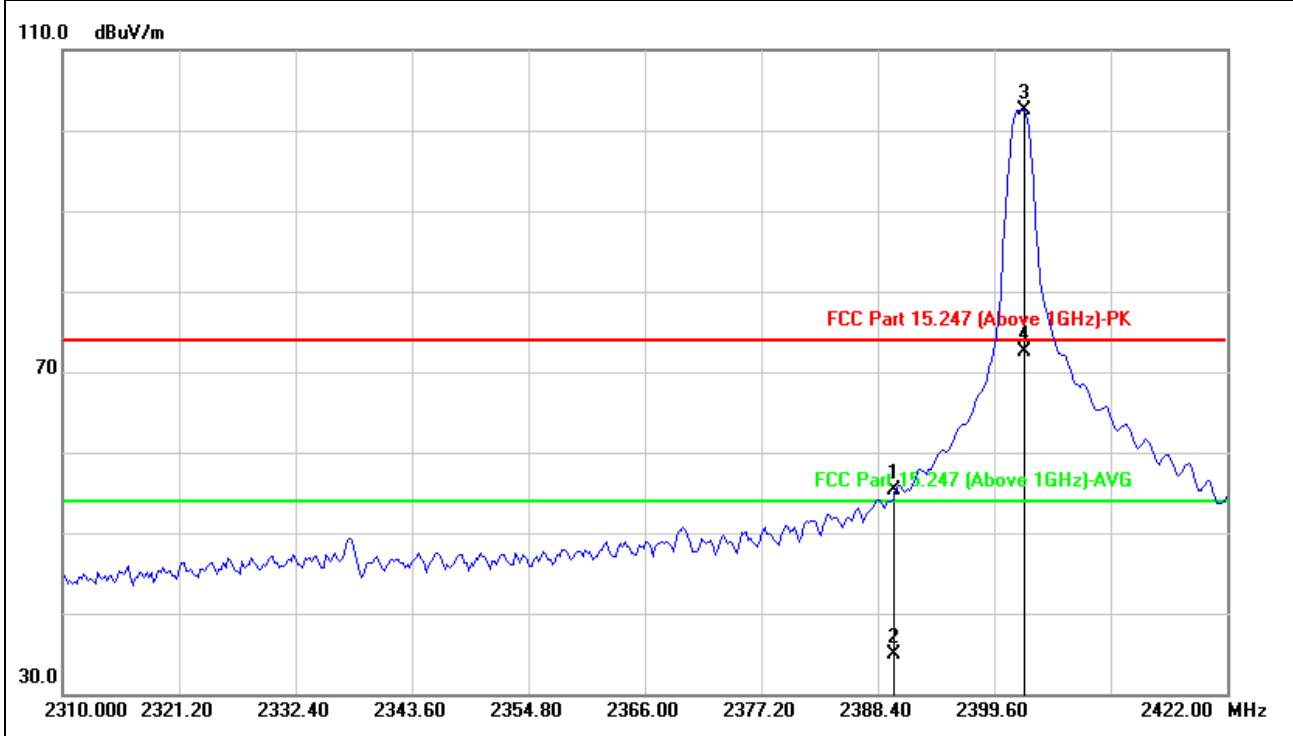


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Antenna Height (cm)	Table Angle (Degree)
1	2390.000	54.61	0.69	55.30	74.00	-18.70	peak	107	348
2	2390.000	34.30	0.69	34.99	54.00	-19.01	AVG	107	348
3 #	2402.473	101.78	0.70	102.48			peak	107	348
4 #	2402.473	71.80	0.70	72.50			AVG	107	348
5	4804.000	42.84	4.43	47.27	74.00	-26.73	peak	100	323
6	4804.000	32.11	4.43	36.54	54.00	-17.46	AVG	100	323
7	7206.000	49.23	9.09	58.32	74.00	-15.68	peak	100	360
8	7206.000	35.96	9.09	45.05	54.00	-8.95	AVG	100	360

Remarks:

1. Emission Level = Read Level + Factor (Antenna Factor + Cable Loss - Preamp Factor)
2. Margin value = Emission level – Limit value
3. #2402MHz: Fundamental frequency.
4. The amplitude of other spurious emissions attenuated more than 20dB below the permissible value is not required to be report



Test channel	Channel 0	Frequency Range	1GHz ~ 25GHz
Detector Function	Peak (PK) Average (AVG)	Tested By	Jim Xu

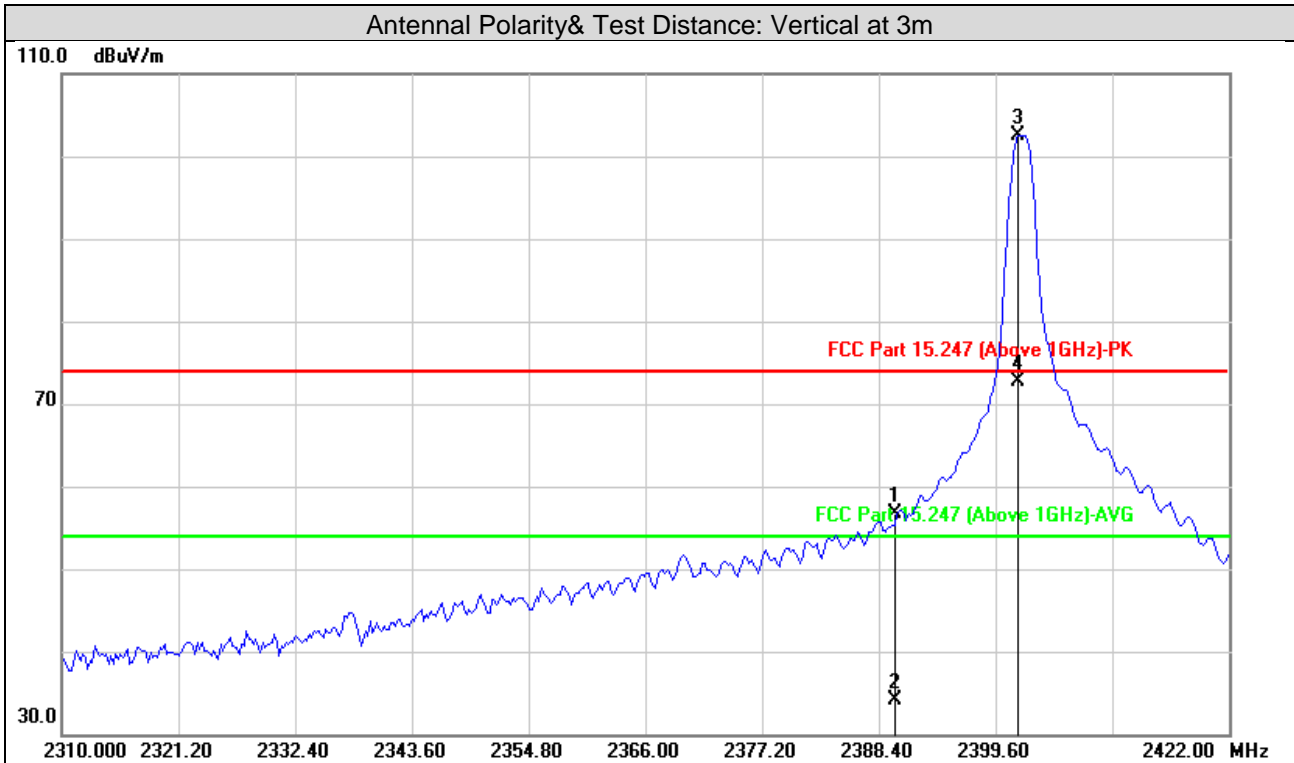

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Antenna Height (cm)	Table Angle (Degree)
1	2390.000	56.01	0.69	56.70	74.00	-17.30	peak	213	5
2	2390.000	33.35	0.69	34.04	54.00	-19.96	AVG	213	5
3 #	2401.800	101.85	0.70	102.55			peak	213	5
4 #	2401.800	71.98	0.70	72.68			AVG	213	5
5	4804.000	42.84	4.43	47.27	74.00	-26.73	peak	100	323
6	4804.000	32.11	4.43	36.54	54.00	-17.46	AVG	100	323
7	7206.000	45.76	9.09	54.85	74.00	-19.15	peak	100	40
8	7206.000	33.42	9.09	42.51	54.00	-11.49	AVG	100	40

Remarks:

1. Emission Level = Read Level + Factor (Antenna Factor + Cable Loss - Preamp Factor)
2. Margin value = Emission level – Limit value
3. #2402MHz: Fundamental frequency.
4. The amplitude of other spurious emissions attenuated more than 20dB below the permissible value is not required to be report



Test channel	Channel 19	Frequency Range	1GHz ~ 25GHz
Detector Function	Peak (PK) Average (AVG)	Tested By	Jim Xu

Antennal Polarity& Test Distance: Horizontal at 3m									
No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Antenna Height (cm)	Table Angle (Degree)
1#	2440.000	102.93	-1.28	101.65			peak	100	360
2#	2440.000	69.94	-1.28	68.66			AVG	100	360
3	4880.000	65.08	4.66	69.74	74.00	-4.26	peak	100	4
4	4880.000	46.21	4.66	50.87	54.00	-3.13	AVG	100	4
5	7320.000	47.64	9.25	56.89	74.00	-17.11	peak	100	360
6	7320.000	34.48	9.25	43.73	54.00	-10.27	AVG	100	360
Antennal Polarity& Test Distance: Vertical at 3 M									
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Antenna Height (cm)	Table Angle (Degree)
1#	2440.000	101.51	-1.28	100.23			peak	100	360
2#	2440.000	69.64	-1.28	68.36			AVG	100	360
3	4880.000	57.98	4.66	62.64	74.00	-11.36	peak	100	360
4	4880.000	42.69	4.66	47.35	54.00	-6.65	AVG	100	360
5	7320.000	41.39	9.25	50.64	74.00	-23.36	peak	100	200
6	7320.000	29.39	9.25	38.64	54.00	-15.36	AVG	100	200


Remarks:

1. Emission Level = Read Level + Factor (Antenna Factor + Cable Loss - Preamp Factor)
2. Margin value = Emission level – Limit value
3. #2440MHz: Fundamental frequency.
4. The amplitude of other spurious emissions attenuated more than 20dB below the permissible value is not required to be report



Test channel	Channel 39	Frequency Range	1GHz ~ 25GHz
Detector Function	Peak (PK) Average (AVG)	Tested By	Jim Xu

Antenna Polarity& Test Distance: Horizontal at 3 M

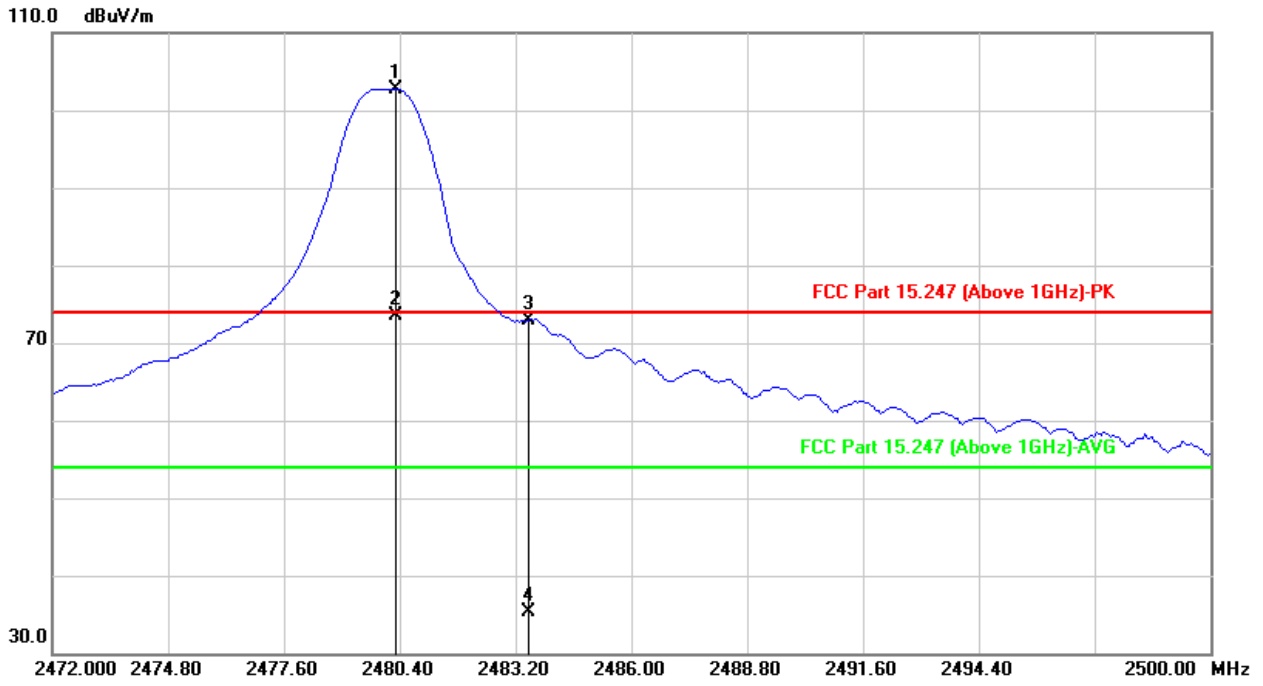


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Antenna Height (cm)	Table Angle (Degree)
1#	2480.305	101.84	0.84	102.68			peak	100	2
2#	2480.305	72.76	0.84	73.60			AVG	100	2
3	2483.500	71.99	0.84	72.83	74.00	-1.17	peak	100	2
4	2483.500	34.42	0.84	35.26	54.00	-18.74	AVG	100	2
5	4960.000	55.81	4.90	60.71	74.00	-13.29	peak	100	360
6	4960.000	41.88	4.90	46.78	54.00	-7.22	AVG	100	360
7	7440.000	37.74	9.40	47.14	74.00	-26.86	peak	100	0
8	7440.000	25.98	9.40	35.38	54.00	-18.62	AVG	100	0

Remarks:

1. Emission Level = Read Level + Factor (Antenna Factor + Cable Loss - Preamp Factor)
2. Margin value = Emission level – Limit value
3. #2480MHz: Fundamental frequency.
4. The amplitude of other spurious emissions attenuated more than 20dB below the permissible value is not required to be report



Test channel	Channel 39	Frequency Range	1GHz ~ 25GHz
Detector Function	Peak (PK) Average (AVG)	Tested By	Jim Xu

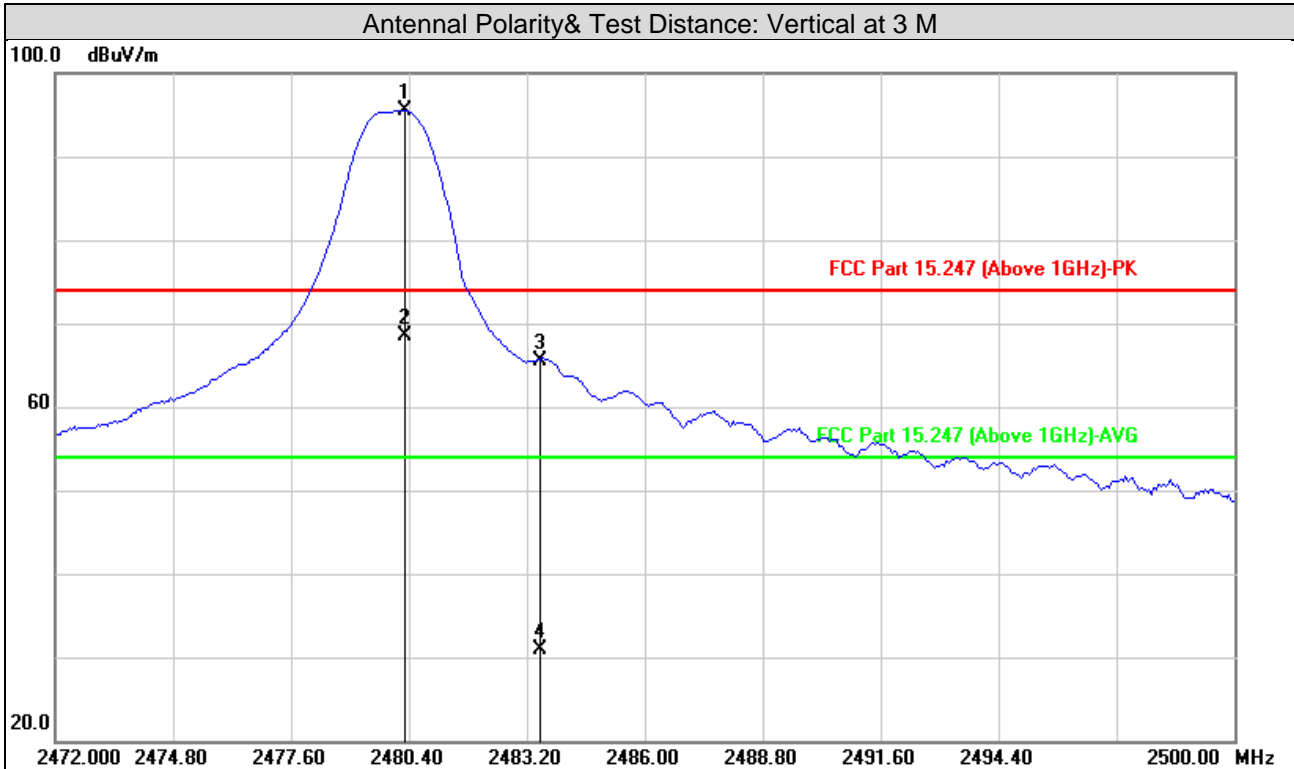

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Antenna Height (cm)	Table Angle (Degree)
1#	2480.305	94.58	0.84	95.42			peak	136	355
2#	2480.305	67.62	0.84	68.46			AVG	136	355
3	2483.500	64.61	0.84	65.45	74.00	-8.55	peak	136	355
4	2483.500	29.99	0.84	30.83	54.00	-23.17	AVG	136	355
5	4960.000	49.94	4.90	54.84	74.00	-19.16	peak	100	360
6	4960.000	37.90	4.90	42.80	54.00	-11.20	AVG	100	360
7	7440.000	35.96	9.40	45.36	74.00	-28.64	peak	100	360
8	7440.000	24.12	9.40	33.52	54.00	-20.48	AVG	100	360

Remarks:

1. Emission Level = Read Level + Factor (Antenna Factor + Cable Loss - Preamplifier Factor)
2. Margin value = Emission level – Limit value
3. #2480MHz: Fundamental frequency.
4. The amplitude of other spurious emissions attenuated more than 20dB below the permissible value is not required to be report



3.2 Conducted Emission Measurement

3.2.1 Limits of Conducted Emission Measurement

Frequency (MHz)	Conducted Limit (dBuV)	
	Quasi-Peak	Average
0.15 - 0.5	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50

- Note: 1. The lower limit shall apply at the transition frequencies.
2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

3.2.2 Test Instruments

Description & Manufacturer	Model No.	Serial No.	Due Date of Calibration
EMI Test Receiver Rohde&Schwarz	ESCI3	101418	2022/09/12
Artificial Mains Network Rohde&Schwarz	ENV216	3560.6550.15	2022/09/12
Test software FARAD	EZ_EMCC V1.1.4.2	N/A	N/A

- Note: 1. The calibration interval of the above test instruments is 12 months.
2. The test was performed in Shielded Room 1.

3.2.3 Test Procedures

- The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/50uH of coupling impedance for the measuring instrument.
- Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit -20dB) was not recorded.

Note: All modes of operation were investigated and the worst-case emissions are reported.


3.2.4 Deviation from Test Standard

No deviation.



3.2.7 Test Results

Frequency Range	150kHz ~ 30MHz	Detector Function & Resolution bandwidth	Quasi-Peak (QP) / Average (AV), 9kHz
Power supply	AC 120V/60Hz	Environmental Conditions	26°C, 60%RH

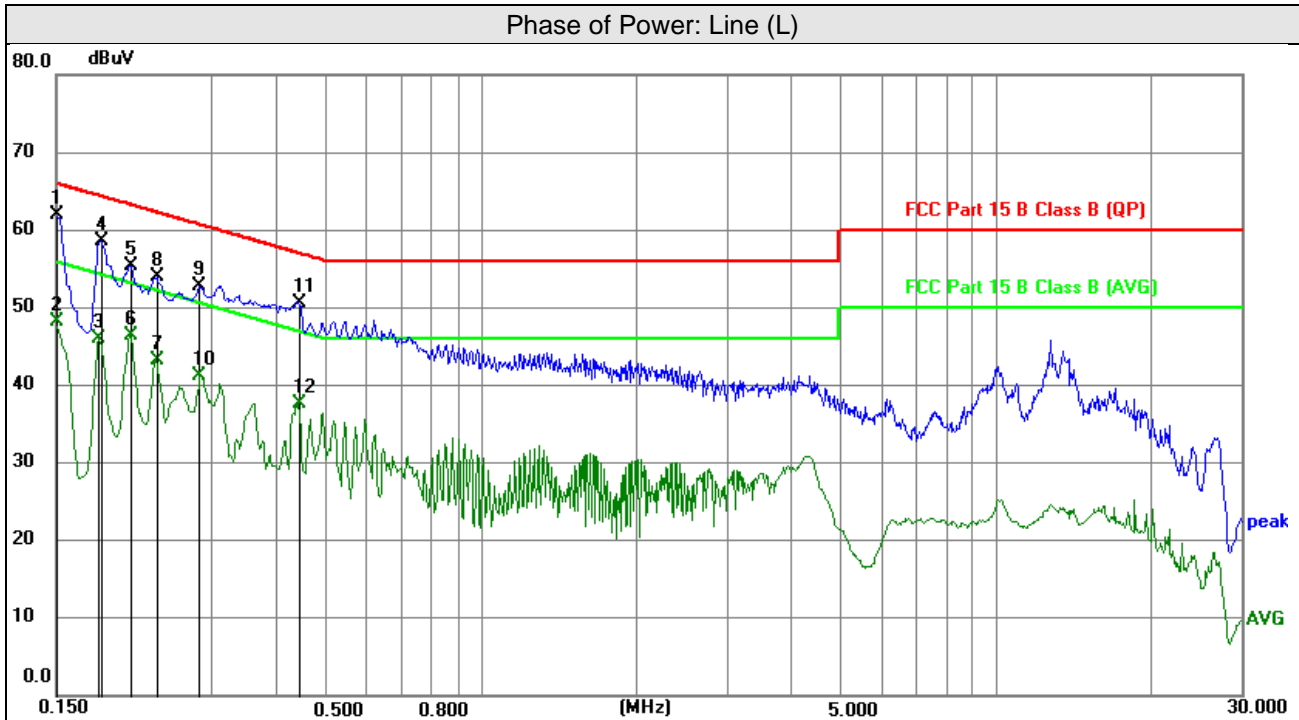


No	Frequency (MHz)	Reading (dBuV)	Correction Factor (dB)	Emission Level (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1500	51.71	10.19	61.90	66.00	-4.10	peak
2	0.1500	38.05	10.19	48.24	56.00	-7.76	AVG
3	0.1815	35.82	10.15	45.97	54.42	-8.45	AVG
4	0.1844	48.49	10.15	58.64	64.29	-5.65	peak
5	0.2094	45.19	10.15	55.34	63.23	-7.89	peak
6	0.2094	36.26	10.15	46.41	53.23	-6.82	AVG
7	0.2341	33.01	10.16	43.17	52.30	-9.13	AVG
8	0.2353	43.77	10.16	53.93	62.26	-8.33	peak
9	0.2847	42.58	10.19	52.77	60.68	-7.91	peak
10	0.2847	31.02	10.19	41.21	50.68	-9.47	AVG
11	0.4421	40.57	10.10	50.67	57.02	-6.35	peak
12	0.4421	27.58	10.10	37.68	47.02	-9.34	AVG

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value



Frequency Range	150kHz ~ 30MHz	Detector Function & Resolution bandwidth	Quasi-Peak (QP) / Average (AV), 9kHz
Power supply	AC 120V/60Hz	Environmental Conditions	26°C, 60%RH

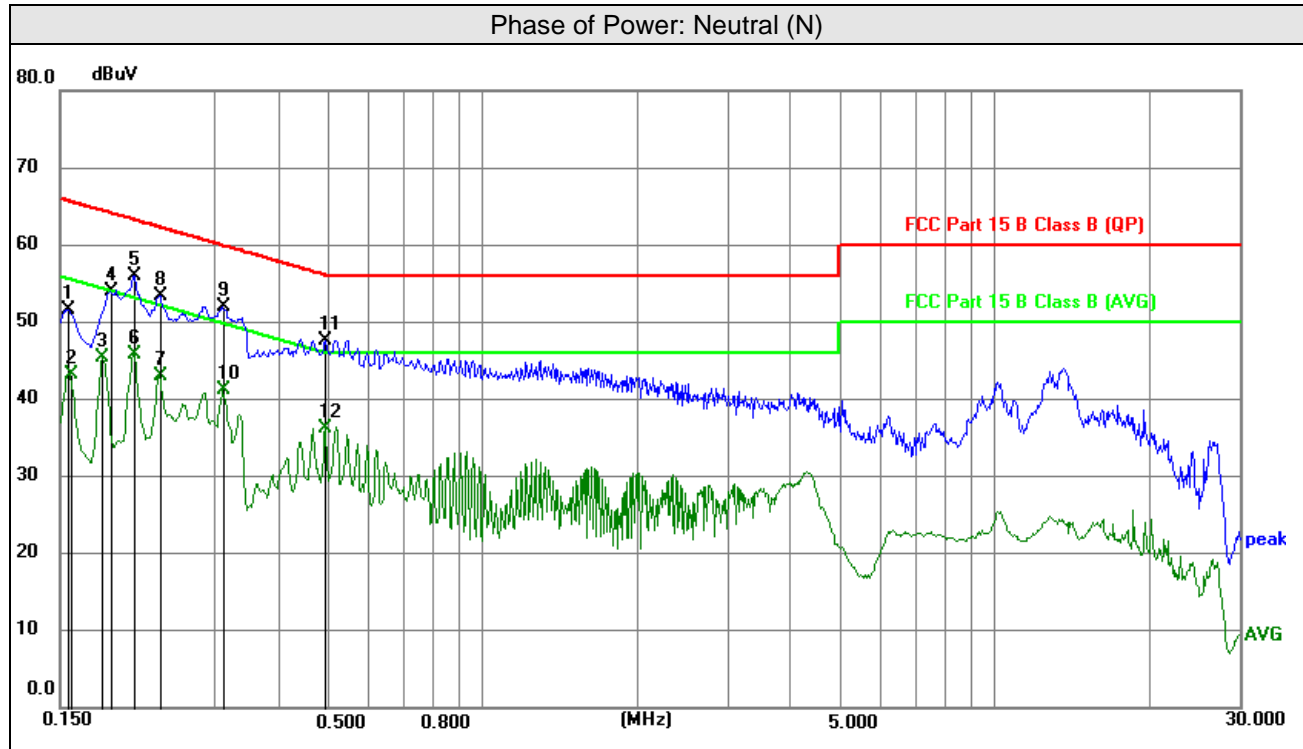

No.	Frequency (MHz)	Reading (dBuV)	Correction Factor (dB)	Emission Level (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1545	41.38	10.18	51.56	65.75	-14.19	peak
2	0.1568	33.12	10.17	43.29	55.63	-12.34	AVG
3	0.1815	35.21	10.15	45.36	54.42	-9.06	AVG
4	0.1883	43.86	10.15	54.01	64.11	-10.10	peak
5	0.2085	45.91	10.14	56.05	63.26	-7.21	peak
6	0.2085	35.63	10.14	45.77	53.26	-7.49	AVG
7	0.2333	32.81	10.15	42.96	52.33	-9.37	AVG
8	0.2355	43.25	10.15	53.40	62.25	-8.85	peak
9	0.3120	41.83	10.17	52.00	59.92	-7.92	peak
10	0.3120	31.05	10.17	41.22	49.92	-8.70	AVG
11	0.4942	37.45	10.11	47.56	56.10	-8.54	peak
12	0.4942	26.03	10.11	36.14	46.10	-9.96	AVG

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.




3.3 6dB Bandwidth Measurement

3.3.1 Limits of 6dB Bandwidth Measurement

The minimum of 6dB Bandwidth Measurement is 0.5MHz.

3.3.2 Test Setup

Subclause 11.8 of ANSI C63.10 is applicable.

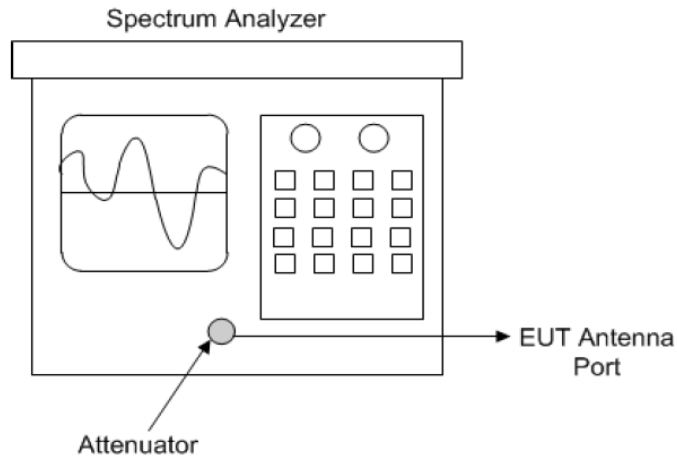

Spectrum analyzer test configuration

3.3.3 Test Instruments

Refer to section 5 to get information of above instrument.



3.3.4 Test Procedure

Option 1:

- a. Set resolution bandwidth (RBW) = 30kHz
- b. Set the video bandwidth (VBW) ≥ 3 x RBW
- c. Detector = Peak.
- d. Trace mode = max hold.
- e. Sweep = auto couple.
- f. Allow the trace to stabilize.
- g. Measure the maximum width of the emission that is constrained by the frequencies associated with the two amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission

Option 2:

The automatic bandwidth measurement capability of an instrument may be employed using the dB bandwidth mode with X set to 6 dB. if the functionality described in 11.8.1 (i.e. RBW= 100 kHz. VBW ≥ 3*RBW. and peak detector with maximum hold) is implemented by the instrumentation function. When using this capability. care shall be taken so that the bandwidth measurement is not influenced by any intermediate power nulls in the fundamental emission that might be ≥6 dB

3.3.5 Deviation from Test Standard


No deviation.

3.3.6 EUT Operating Conditions

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

3.3.7 Test Result


BLE-1Mbps			
Operation Channel	Frequency	Occupied Bandwidth (MHz)	
		Result	Limit
0	2402MHz	0.668	>0.5
19	2440MHz	0.656	>0.5
39	2480MHz	0.672	>0.5

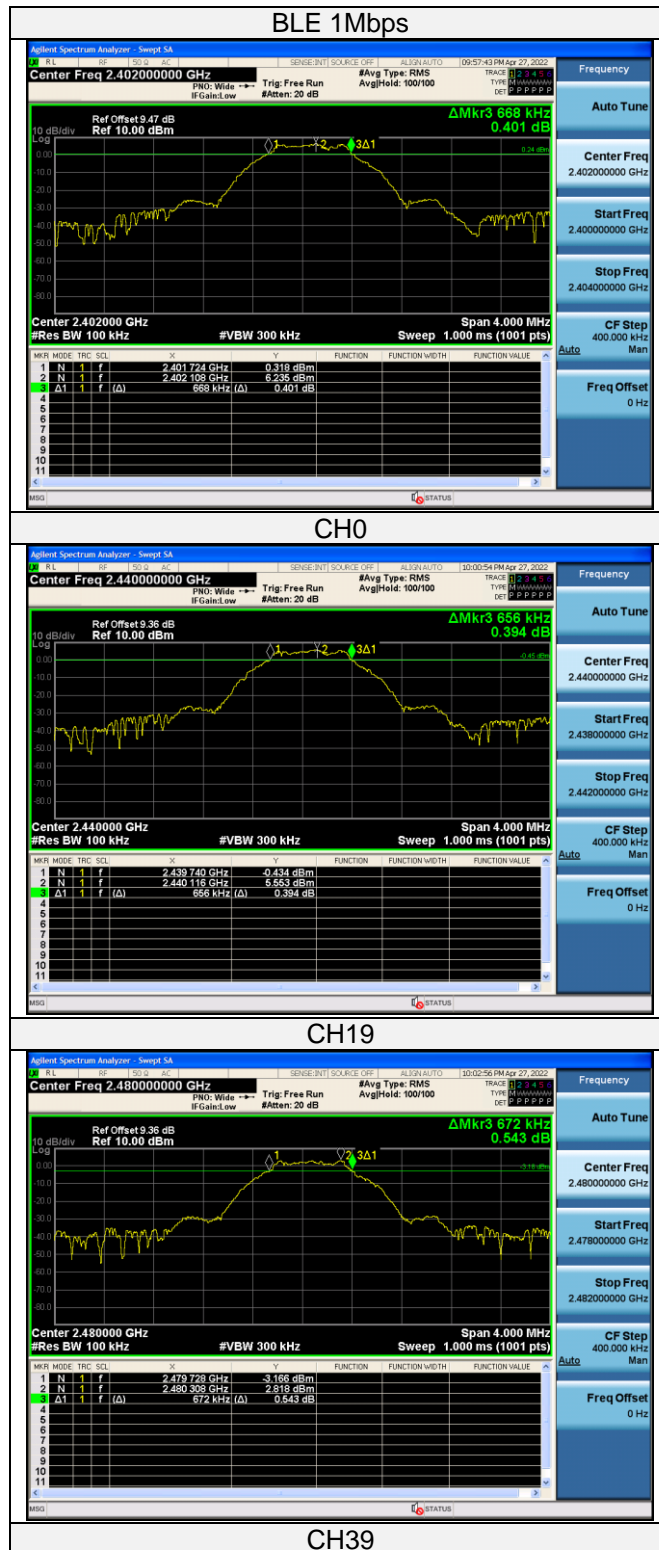



3.4 Occupied Bandwidth Measurement

3.4.1 Test Setup

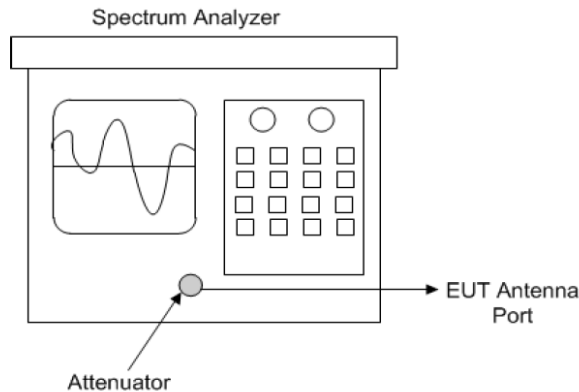

3.4.2 Test Instruments

Refer to section 5 to get information of above instrument.

3.4.3 Test Procedure

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with resolution bandwidth in the range of 1% to 5% of the anticipated emission bandwidth, and a video bandwidth at least 3x the resolution bandwidth and set the detector to peak. The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5 %of the total mean power of a given emission.

3.4.4 Deviation from Test Standard


No deviation.

3.4.5 EUT Operating Conditions

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

3.4.6 Test Results

BLE-1Mbps			
Operation Channel	Frequency	Occupied Bandwidth (MHz)	
		Result	Limit
0	2402MHz	1.0361	2400~2483.5
19	2440MHz	1.0357	2400~2483.5
39	2480MHz	1.0303	2400~2483.6

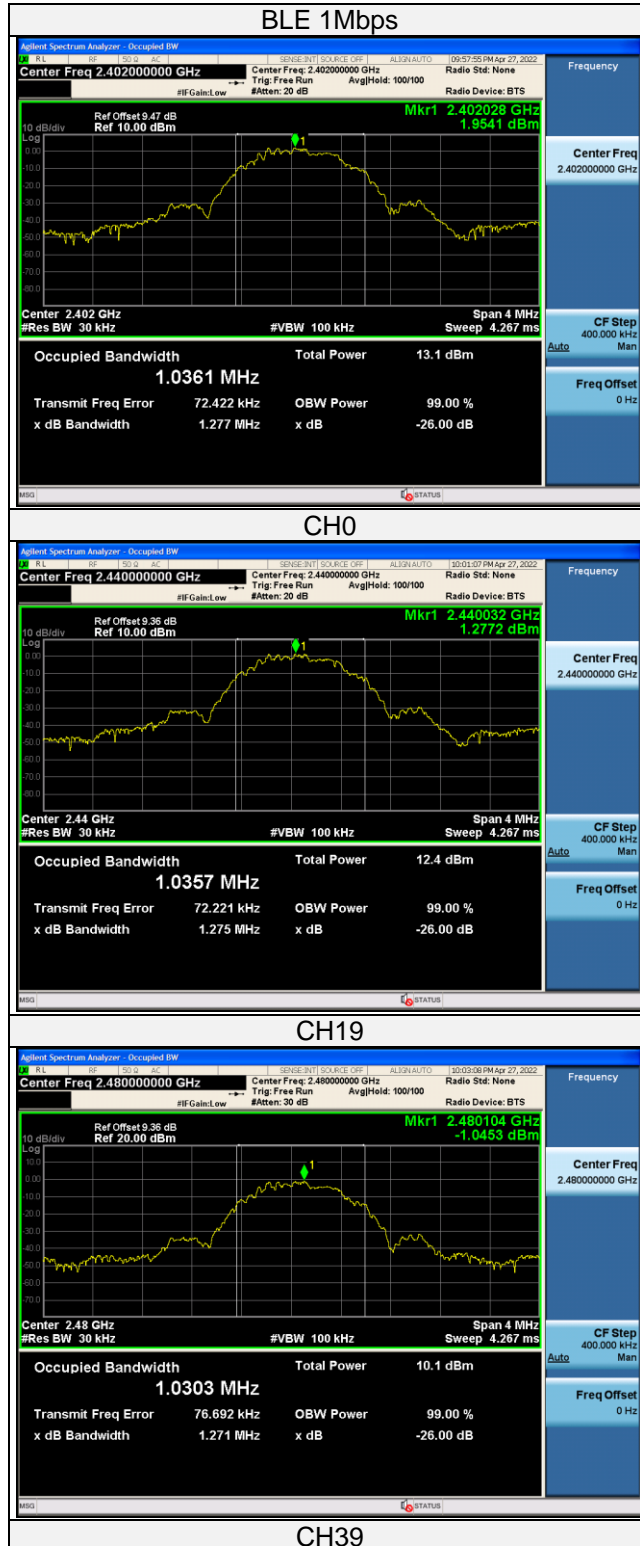




3.5 Conducted Output Power Measurement

3.5.1 Limits of Conducted Output Power Measurement

For systems using digital modulation in the 2400–2483.5 MHz bands: 1 Watt (30dBm)

3.5.2 Test Setup

- Measurement using a spectrum analyzer (SA) Subclause 11.9.2.2 of ANSI C63.10 is applicable

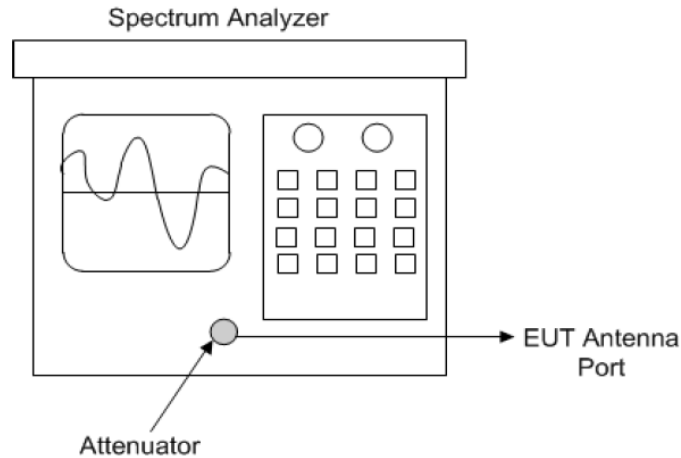

3.5.3 Test Instruments

Refer to section 5 to get information of above instrument.

3.5.4 Test Procedures

Measurement using a spectrum analyzer (SA), Selection of test method:

Maximum peak conducted output power

The following procedure shall be used when an instrument with a resolution bandwidth that is greater than the DTS bandwidth is available to perform the measurement:

- a) Set the RBW > DTS bandwidth.
- b) Set VBW > [3 x RBW]
- c) Set span > [3 x RBW]
- d) Sweep time = auto couple.
- e) Detector = peak
- f) Trace mode = max hold.
- g) Allow trace to fully stabilize.
- h) Use peak marker function to determine the peak amplitude level.



Maximum conducted (average) output power

- a) Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- b) Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
- c) SA Setting:
 - 1)* Set span to at least 1.5 times the OBW
 - 2)* Set sweep trigger to "free run."
 - 3)* Set RBW= 1% to 5% of the OBW. not to exceed 1MHz.
 - 4)* Set VBW $\geq 3 \times$ RBW
 - 5)* Number of points in sweep $\geq 2 \times$ span /RBW. (This gives bin-to-bin spacing \leq RBW / 2. so that narrowband signals are not lost between frequency bins).
 - 6)* Sweep time \leq (number of points in sweep) x T. where T is defined in 11.6. If this gives a sweep time less than the auto sweep time of the instrument. then method AVGSA-3 shall not be used (use AVGSA-3A). The purpose of this step is so that the averaging time in each bin is less than or equal to the minimum time of a transmission.
 - 7)* Detector =RMS (power averaging).
 - 8)* Trace mode =Max hold.
 - 9)* Allow max hold to run for at least 60 s or longer as needed to allow the trace to stabilize.
 - 10)* Compute power by integrating the spectrum across the OBW of the signal using the instrument's band power measurement function with band limits set equal to the OBW band edges. If the instrument does not have a band power function. then sum the spectrum levels (in power units) at intervals equal to the RBW extending across the entire OBW.
- d. Measure the captured power within the band and recording the plot.
- e. Repeat above procedures until all frequencies required were complete.

3.5.5 Deviation from Test Standard

No deviation.

3.5.6 EUT Operating Conditions

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.




3.5.7 Test Results

BLE-1Mbps						
Peak Power						
Channel	Freq.	RF Output Power		Limit (mW)		Verdict
No.	(MHz)	(dBm)	(mW)	Rss-247	FCC	
0	2402	6.754	4.736	<125	<1000	Pass
19	2440	6.107	4.080	<125	<1000	Pass
39	2480	3.674	2.330	<125	<1000	Pass


BLE-1Mbps						
Average Power						
Channel	Freq.	RF Output Power		Limit (mW)		Verdict
No.	(MHz)	(dBm)	(mW)	Rss-247	FCC	
0	2402	-3.587	0.438	<125	<1000	Pass
19	2440	-4.705	0.338	<125	<1000	Pass
39	2480	-7.692	0.170	<125	<1000	Pass




Peak Conducted power

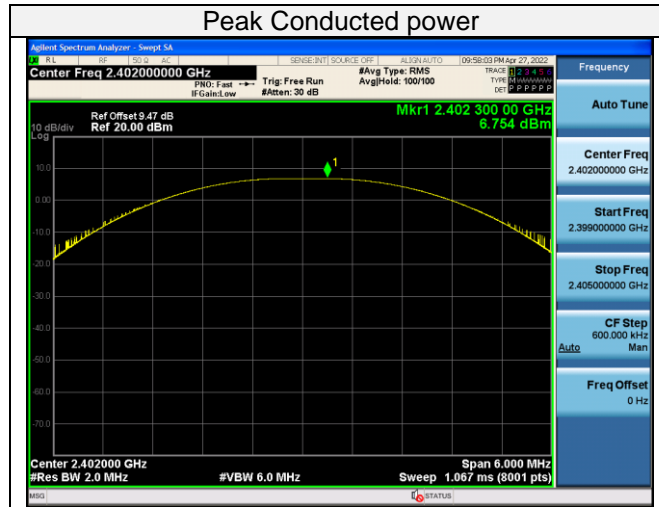

CH0

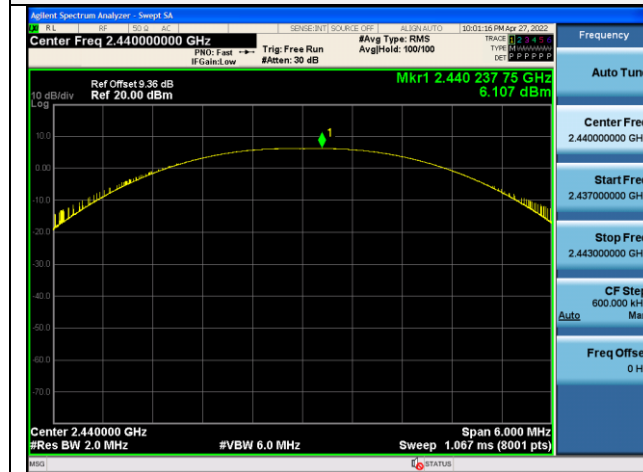

CH19

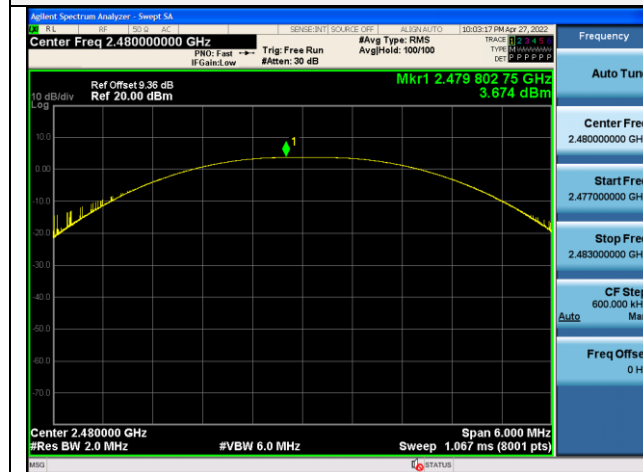

CH39






3.6 Power Spectral Density Measurement

3.6.1 Limits of Power Spectral Density Measurement

The Maximum of Power Spectral Density Measurement is 8dBm/3kHz.

3.6.2 Test Setup

- DTS maximum power spectral density level in the fundamental emission Subclause 11.10 of ANSI C63.10 is applicable

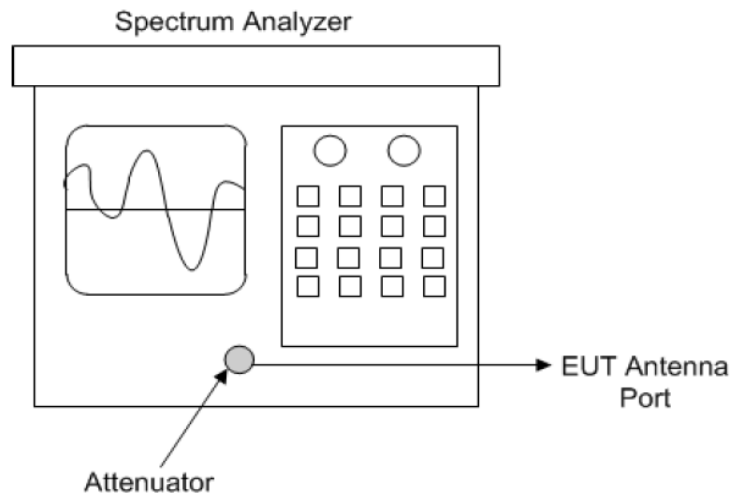

Spectrum analyzer test configuration

3.6.3 Test Instruments

Refer to section 5 to get information of above instrument.

3.6.4 Test Procedure

- Maximum peak Power Spectral Density

The following procedure shall be used if maximum peak conducted output power was used to determine compliance:

- Set analyzer center frequency to DTS channel center frequency.
- Set the span to 1.5 times the DTS bandwidth.
- Set the RBW to $3 \text{ kHz} < \text{RBW} < 100 \text{ kHz}$.
- Set the VBW $> [3 \times \text{RBW}]$.
- Detector = peak.
- Sweep time = auto couple
- Trace mode = max hold
- Allow trace to fully stabilize.
- Use the peak marker function to determine the maximum amplitude level within the RBW
- If measured value exceeds requirement, then reduce RBW (but no less than 3 kHz) and repeat.



Maximum Average Power Spectral Density

The maximum conducted (average) output power was used to determine compliance

Method AVGPS-3:

Method AVGPS-3 uses mms detection across ON and OFE times of the EUT with max hold. The following procedure is applicable when the EUT cannot be configured to transmit continuously (i.e. D<98%), when sweep triggering/signal gating cannot be used to measure only when the EUT is transmitting at its maximum power control level. and when the transmission duty cycle is not constant (i.e., duty cycle variations exceed $\pm 2\%$),

SA Setting:

- a. Set the instrument span to a minimum of 1.5 times the OBW.
 - b. Set sweep trigger to "free run."
 - c. Set the RBW = 3 kHz, VBW = 10 kHz,
 - d. Detector = RMS (power averaging).
 - e. Sweep time = Auto couple,
 - f. Allow max hold to run for at least 60 s or longer as needed to allow the trace to stabilize.
 - g. Use the peak marker function to determine the maximum PSD level
- If the measured value exceeds requirement, then reduce RBW (but no less than 3 kHz) and repeat (note that this may require zooming in on the emission of interest and reducing the span to meet the minimum measurement point requirement as the RBW is reduced).

3.6.5 Deviation from Test Standard

No deviation.


3.6.6 EUT Operating Condition

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.



3.6.7 Test Results

BLE-1Mbps		Power Density	
Test Channel	Channel Frequency	Test Result (dBm/10kHz)	Limit (dBm/3kHz)
0	2402MHz	-8.895	<8
19	2440MHz	-9.486	<8
39	2480MHz	-11.762	<8

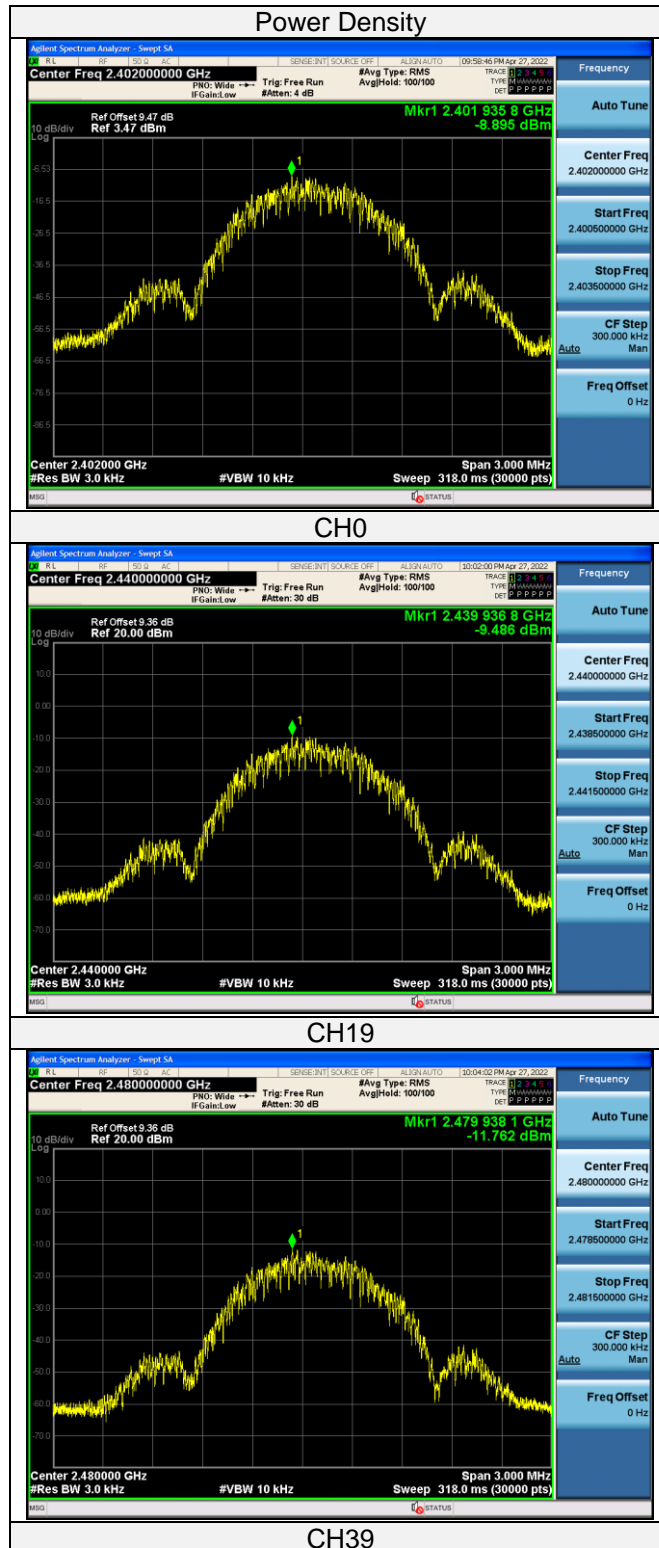




3.7 Conducted Out of Band Emission Measurement

3.7.1 Limits of Conducted Out of Band Emission Measurement

- a. **If the maximum peak conducted output power procedure was used to determine compliance as described in 11.9.1**, then the peak output power measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz (i.e., 20 dBc).
- b. **If maximum conducted (average) output power was used to determine compliance as described in 11.9.2**, then the peak power in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 30 dB relative to the maximum in-band peak PSD level in 100 kHz (i.e., 30 dBc).

3.7.2 Test Setup

- DTS emissions in non-restricted frequency bands Subclause 11.11 of ANSI C63.10 is applicable.
- DTS emissions in restricted frequency bands Subclause 11.12 of ANSI C63.10 is applicable

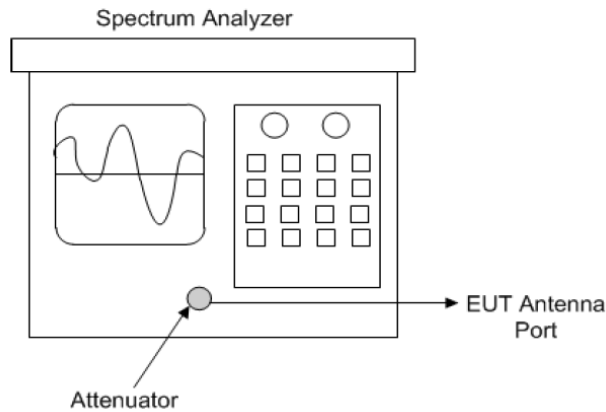

Spectrum analyzer test configuration

3.7.3 Test Instruments

Refer to section 5 to get information of above instrument.



3.7.4 Test Procedure

- a. Establish a reference level by using the following procedure:
- 1) Set instrument center frequency to DTS channel center frequency.
 - 2) Set the span to 21.5 times the DTS bandwidth)
 - 3) Set the RBW= 100 kHz)
 - 4) Set the VBW $\geq 3 \times$ RBW
 - 5) Detector = peak
 - 6) Sweep time = auto coupling
 - 7) Trace mode =max hold
 - 8) Allow trace to fully stabilize
 - 9) Use the peak marker function to determine the maximum PSD level.

Note that the channel found to contain the maximum PSD level can be used to establish the reference level.

- b. Establish an emission level by using the following procedure:
- 1) Set the center frequency and span to encompass frequency range to be measured.
 - 2) Set the RBW = 100 kHz
 - 3) Set the VBW ≥ 300 kHz.
 - 4) Detector = peak.
 - 5) Sweep time = auto couple.
 - 6) Trace mode = max hold.
 - 7) Allow trace to fully stabilize.
 - 8) Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.

3.7.5 Deviation from Test Standard


No deviation.


3.7.6 EUT Operating Condition


The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.




3.7.7 Test results

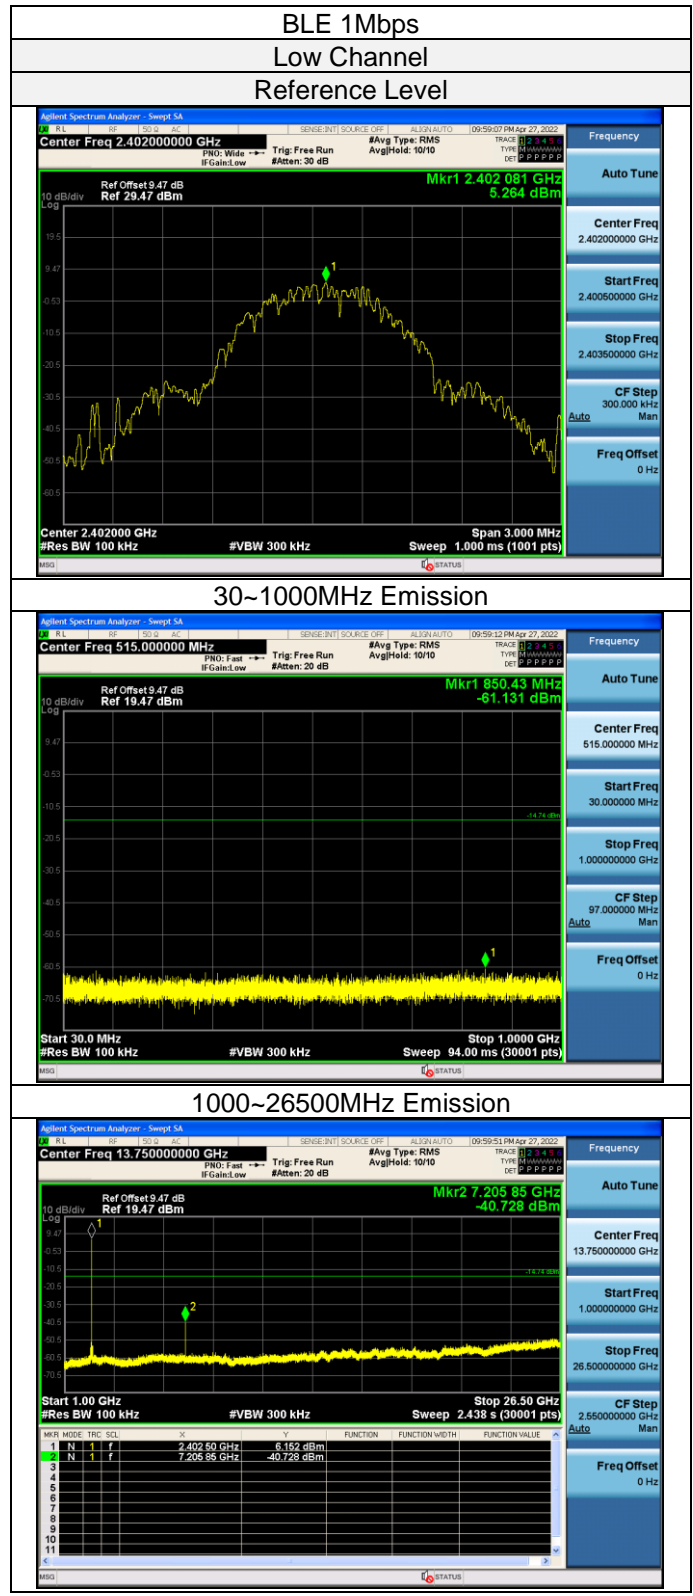

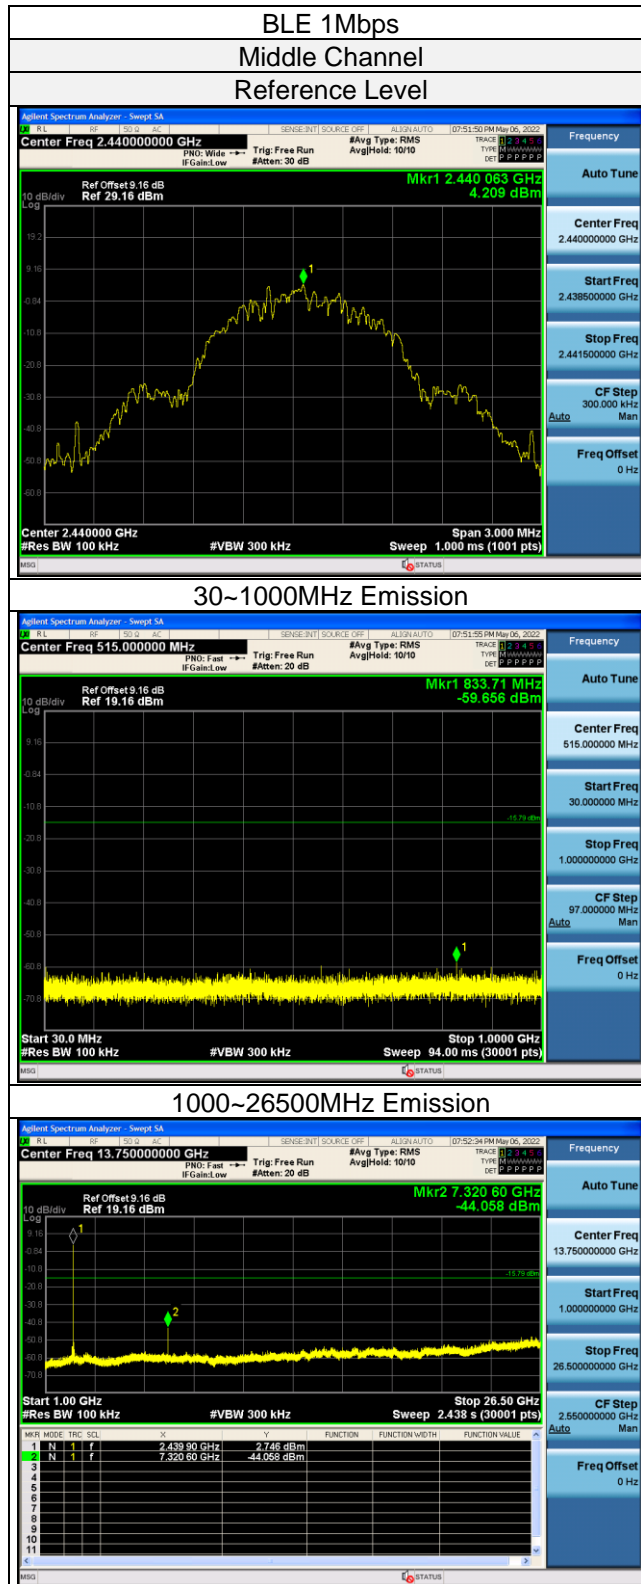

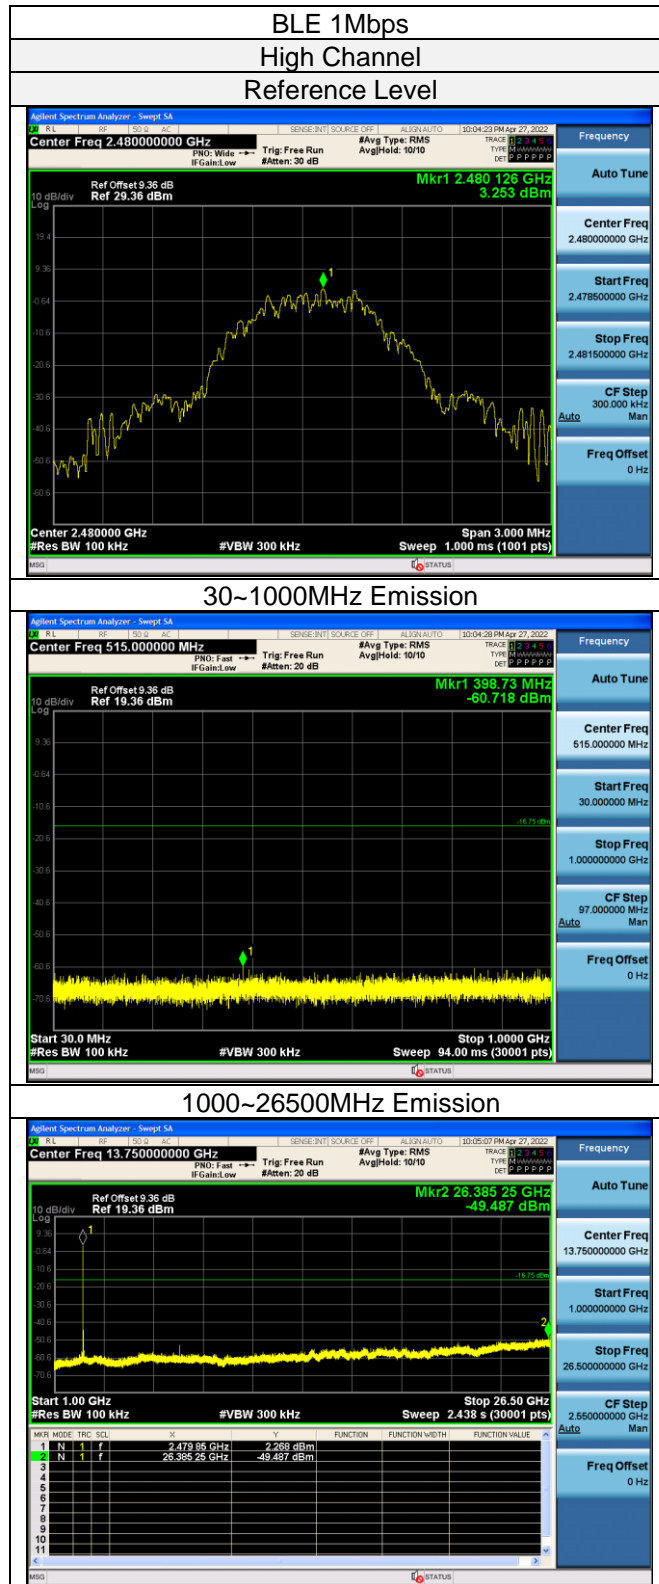

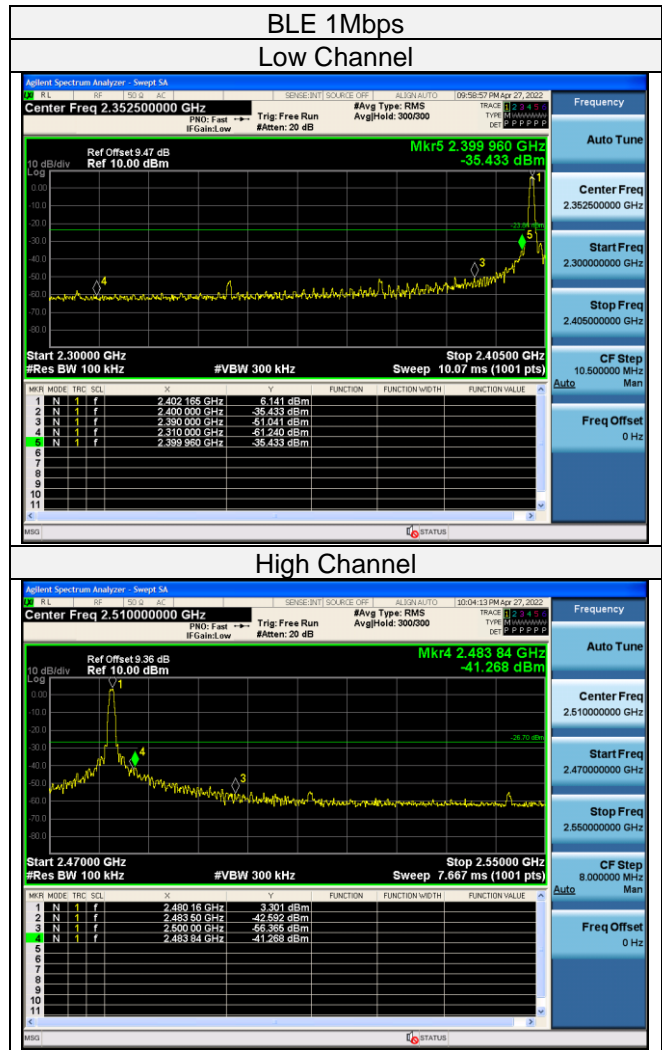



4. Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo).



5. Test Instruments

Description & Manufacturer	Model No.	Serial No.	Next Date of Calibration
Spectrum Keysight	N9020A	MY51240612	2022/09/12
Spectrum Analyzer Rohde&Schwarz	FSV-40N	101783	2022/09/12
Power Meter 10Hz~18GHz Tonscend	JS0806-2	188060126	2022/09/12
Signal generator Keysight	E4421B	GB40051020	2022/09/12
Signal generator Keysight	N5182A	MY47420944	2022/09/12
Test Software Tonscend	JS0806-2	NA	NA
Hygrothermograph Yuhuaze	HTC-1	NA	2022/09/12

Note:

1. The calibration interval of the above test instruments is 12 months.
2. The test was performed in Chamber 1.



Appendix – Information on The Testing Laboratories

We, [Hwa-Hsing \(Dongguan\) Co., Ltd.](#), A global provider of TESTING and CERTIFICATION services for consumer products, electronic products and wireless information technology products. Adhering to the core values “HONEST and TRUSTWORTHY, OBJECTIVE and IMPARTIALITY, RIGOROUS and AFFICIENT”, commitment to provide professional, perfect and efficient comprehensive ONE-STOP solution of TESTING and CERTIFICATION services for Manufacturers, Buyers, Traders, Brands, Retailers. Assist client to better manage risk, protect their brands, reduce costs and cut time to over 150 markets in global. Our laboratories are FCC recognized accredited test firms and accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Lab Address: [No.101, Bld N1, Yuyuan 2Rd, Yuyuan Industrial Park, HuangJiang Town, Dongguan, China](#)

Contact Tel: [0769-83078199](tel:0769-83078199)

Email: Customerservice.dg@hwa-hsing.com

Web Site: www.hwa-hsing.com

--- END ---