

69.85mm+/-0.2

Powered Subwoofer

Model: SB-4000


SN: SB4KMMYY1001



FCC ID: 2AGJ44K IC: 20885-4K
CAN ICES-3(B)/NMB-3(B)

Design and Engineering by SVS, Ohio USA
Made in P.R.C. Exclusively for SVS

25.4mm+/-0.2

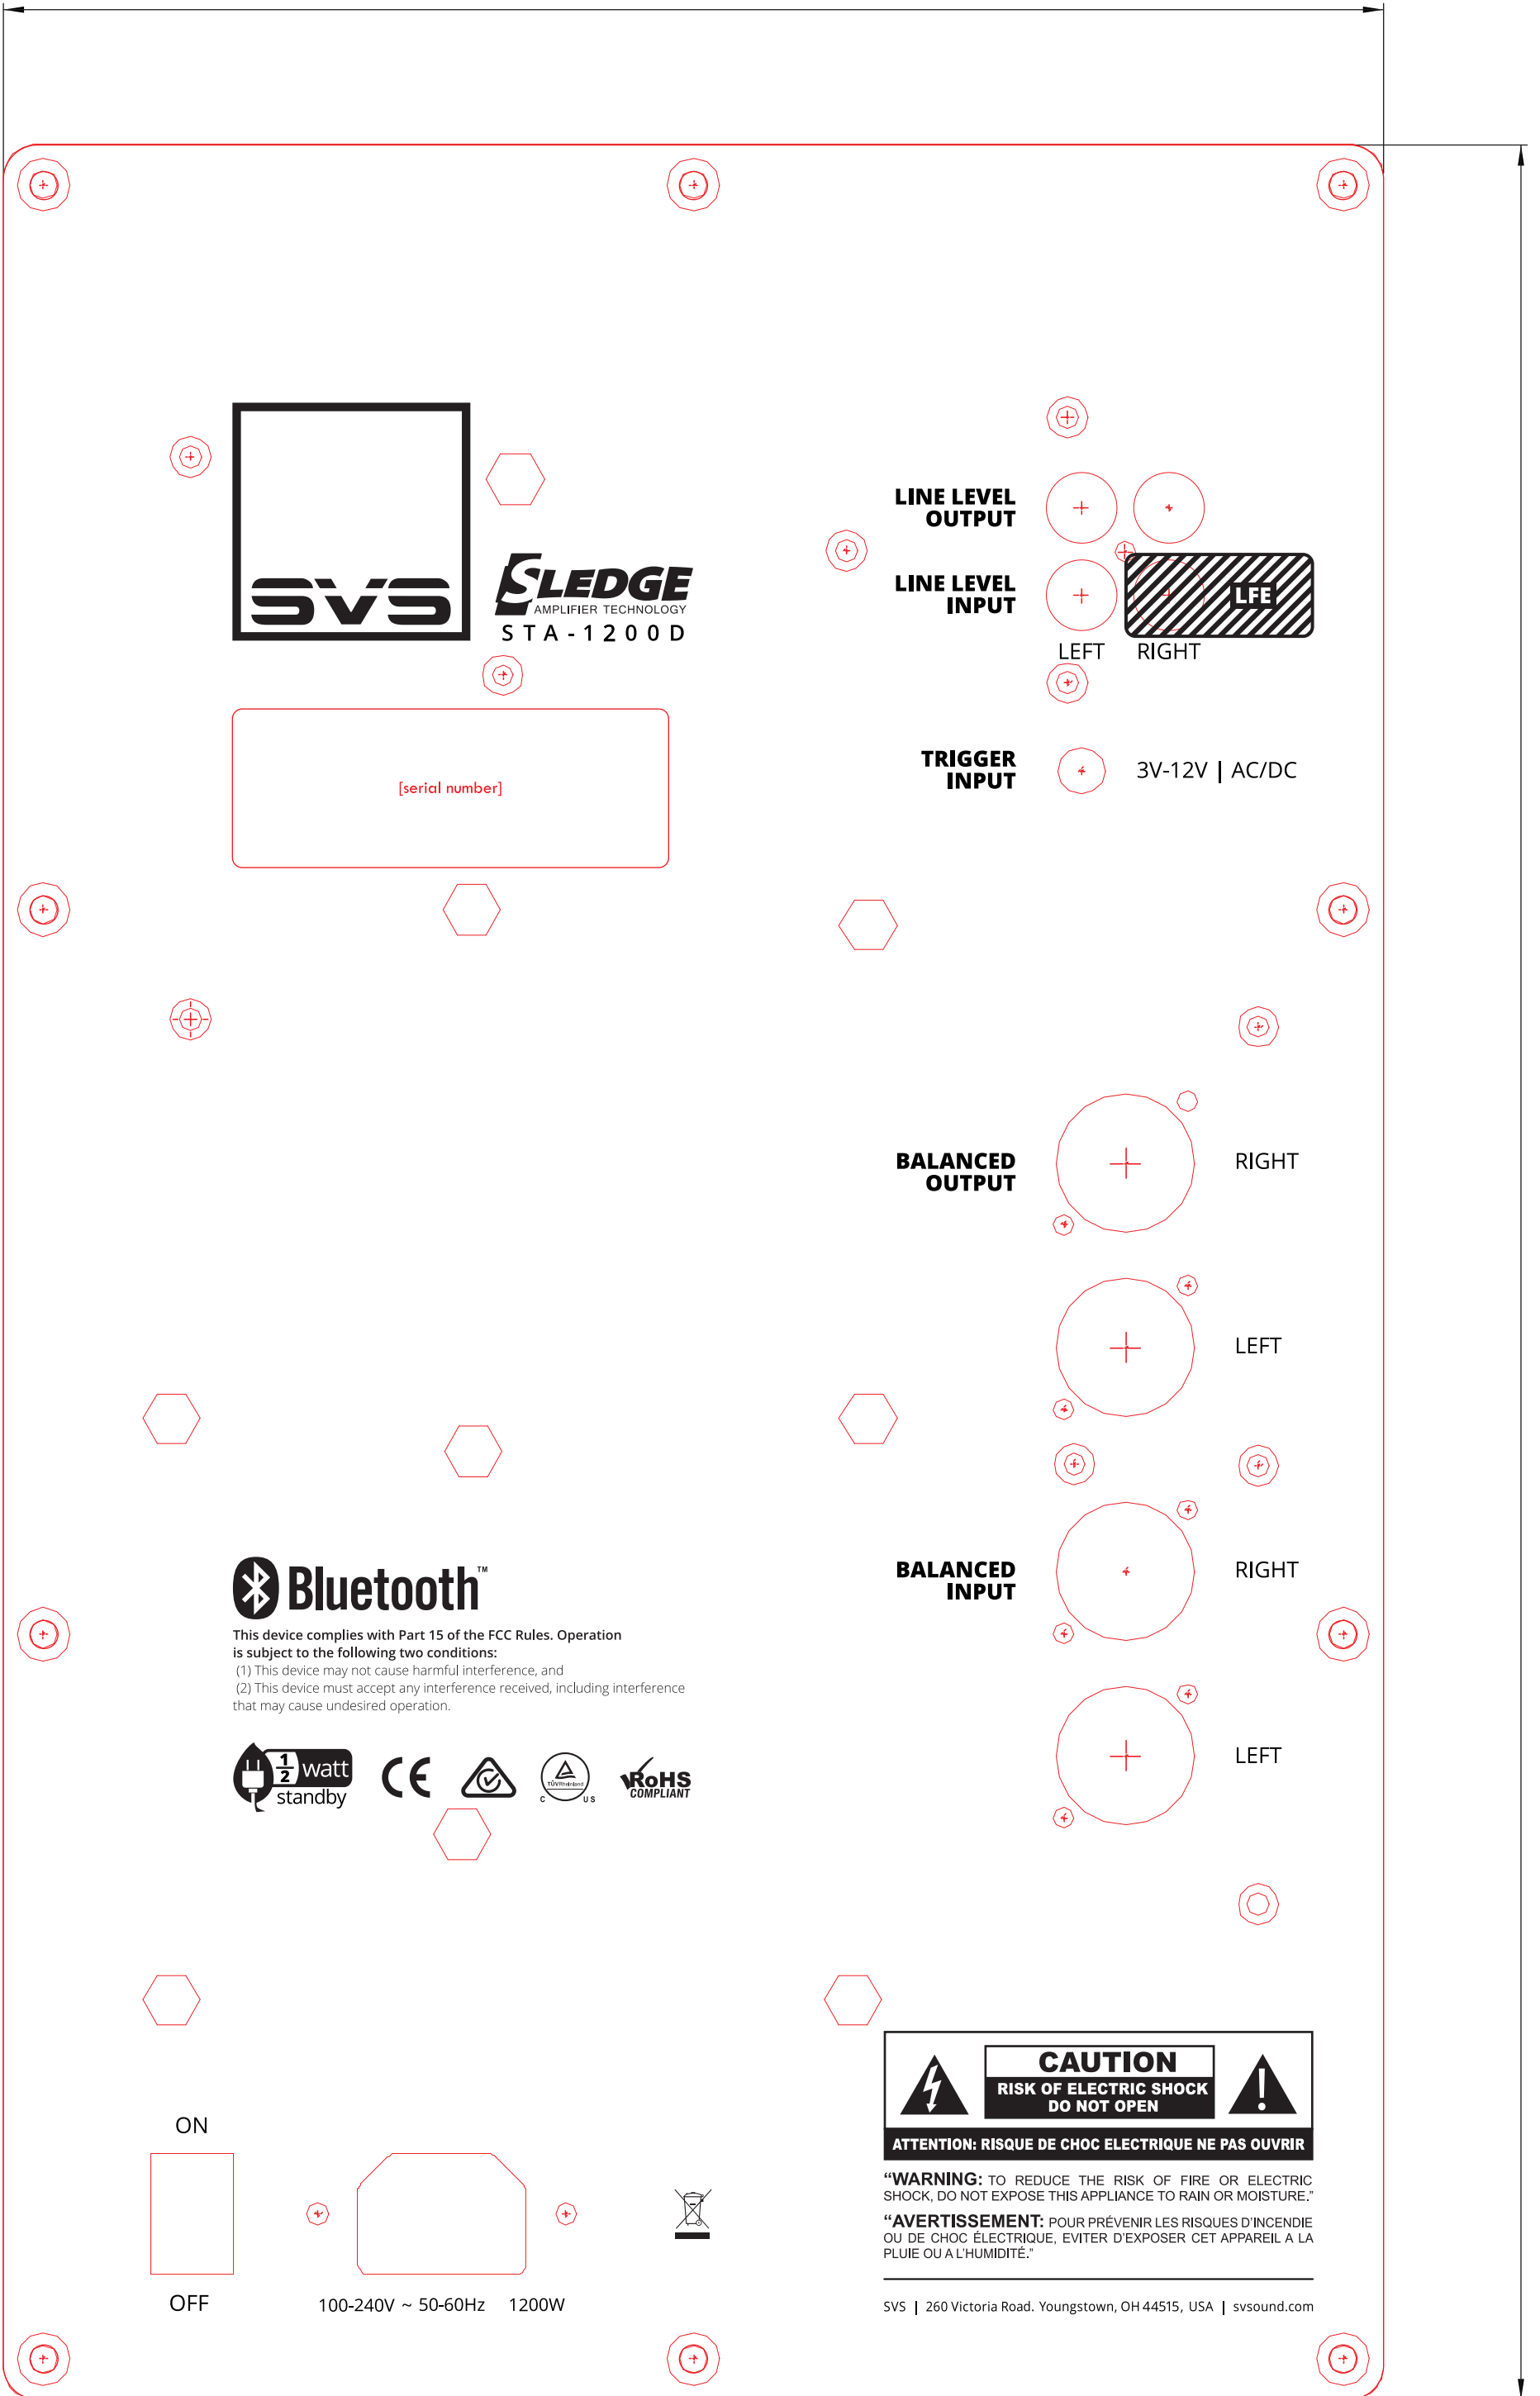

[serial number]

LINE LEVEL OUTPUT

LINE LEVEL INPUT




LEFT RIGHT


TRIGGER INPUT

3V-12V | AC/DC

BALANCED OUTPUT




RIGHT




LEFT

BALANCED INPUT



RIGHT




LEFT




This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:
 (1) This device may not cause harmful interference, and
 (2) This device must accept any interference received, including interference that may cause undesired operation.



ON



OFF



100-240V ~ 50-60Hz 1200W



“WARNING: TO REDUCE THE RISK OF FIRE OR ELECTRIC SHOCK, DO NOT EXPOSE THIS APPLIANCE TO RAIN OR MOISTURE.”
 “AVERTISSEMENT: POUR PRÉVENIR LES RISQUES D'INCENDIE OU DE CHOC ÉLECTRIQUE, ÉVITER D'EXPOSER CET APPAREIL À LA PLUIE OU À L'HUMIDITÉ.”



Label location