

FCC TEST REPORT

For

Videostrong Technology Co.,Ltd

Android TV BOX

Model No.: KB2

Additional Model No.: Please refer to page 6

Prepared for : Videostrong Technology Co.,Ltd
Address : 402A, Building B, Donglian Industrial 23rd District, Bao'an , Shenzhen, China

Prepared by : Shenzhen LCS Compliance Testing Laboratory Ltd.
Address : 1F., Xingyuan Industrial Park, Tongda Road, Bao'an Blvd., Bao'an District, Shenzhen, Guangdong, China

Tel : (+86)755-82591330
Fax : (+86)755-82591332
Web : www.LCS-cert.com
Mail : webmaster@LCS-cert.com

Date of receipt of test sample : November 01, 2016
Number of tested samples : 1
Serial number : Prototype
Date of Test : November 01, 2016~November 22, 2016
Date of Report : November 22, 2016

FCC TEST REPORT
FCC CFR 47 PART 15 E(15.407): 2015

Report Reference No. : LCS1611010030E

Date of Issue : November 22, 2016

Testing Laboratory Name : Shenzhen LCS Compliance Testing Laboratory Ltd.

Address : 1F., Xingyuan Industrial Park, Tongda Road, Bao'an Blvd., Bao'an District, Shenzhen, Guangdong, China

Testing Location/ Procedure : Full application of Harmonised standards
Partial application of Harmonised standards
Other standard testing method

Applicant's Name : Videostrong Technology Co.,Ltd

Address : 402A, Building B, Donglian Industrial 23rd District, Bao'an , Shenzhen, China

Test Specification

Standard : FCC CFR 47 PART 15 E(15.407): 2015

Test Report Form No. : LCSEMC-1.0

TRF Originator : Shenzhen LCS Compliance Testing Laboratory Ltd.

Master TRF : Dated 2011-03

SHENZHEN LCS COMPLIANCE TESTING LABORATORY LTD. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen LCS Compliance Testing Laboratory Ltd. is acknowledged as copyright owner and source of the material. Shenzhen LCS Compliance Testing Laboratory Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

EUT Description. : Android TV BOX

Trade Mark : N/A

Model/ Type reference : KB2

Ratings : DC 5.0V, 2.0A

Result : Positive

Compiled by:

Jacky Li

Jacky Li/ File administrators

Supervised by:

Glin Lu

Glin Lu/ Technique principal

Approved by:

Gavin Liang

Gavin Liang/ Manager

FCC -- TEST REPORT

Test Report No. : LCS1611010030E	<u>November 22, 2016</u> Date of issue
---	---

EUT..... : Android TV BOX Type / Model..... : KB2
Applicant..... : Videostrong Technology Co.,Ltd Address..... : 402A, Building B, Donglian Industrial 23rd District, Bao'an , Shenzhen, China Telephone..... : 0755-27928980 Fax..... : 0755-27928980
Manufacturer..... : Videostrong Technology Co.,Ltd Address..... : 402A, Building B, Donglian Industrial 23rd District, Bao'an , Shenzhen, China Telephone..... : 0755-27928980 Fax..... : 0755-27928980
Factory..... : Videostrong Technology Co.,Ltd Address..... : 402A, Building B, Donglian Industrial 23rd District, Bao'an , Shenzhen, China Telephone..... : 0755-27928980 Fax..... : 0755-27928980

Test Result:	Positive
---------------------	-----------------

The test report merely corresponds to the test sample.
It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

Revision History

Revision	Issue Date	Revisions	Revised By
00	2016-11-22	Initial Issue	Gavin Liang

TABLE OF CONTENTS

- 1. GENERAL INFORMATION 6**
 - 1.1. DESCRIPTION OF DEVICE (EUT) 6
 - 1.2. HOST SYSTEM CONFIGURATION LIST AND DETAILS 6
 - 1.3. EXTERNAL I/O PORT 7
 - 1.4. DESCRIPTION OF TEST FACILITY 7
 - 1.5. STATEMENT OF THE MEASUREMENT UNCERTAINTY 7
 - 1.6. MEASUREMENT UNCERTAINTY 7
 - 1.7. DESCRIPTION OF TEST MODES 8
- 2. TEST METHODOLOGY 9**
 - 2.1. EUT CONFIGURATION 9
 - 2.2. EUT EXERCISE 9
 - 2.3. GENERAL TEST PROCEDURES 9
- 3. SYSTEM TEST CONFIGURATION 10**
 - 3.1. JUSTIFICATION 10
 - 3.2. EUT EXERCISE SOFTWARE 10
 - 3.3. SPECIAL ACCESSORIES 10
 - 3.4. BLOCK DIAGRAM/SCHEMATICS 10
 - 3.5. EQUIPMENT MODIFICATIONS 10
 - 3.6. TEST SETUP 10
- 4. SUMMARY OF TEST RESULTS 11**
- 5. TEST RESULT 12**
 - 5.1. ON TIME AND DUTY CYCLE 12
 - 5.2. MAXIMUM CONDUCTED OUTPUT POWER MEASUREMENT 14
 - 5.3. POWER SPECTRAL DENSITY MEASUREMENT 16
 - 5.4. 6DB OCCUPIED BANDWIDTH MEASUREMENT 22
 - 5.5. RADIATED EMISSIONS MEASUREMENT 27
 - 5.6. POWER LINE CONDUCTED EMISSIONS 46
 - 5.7. ANTENNA REQUIREMENTS 49
- 6. LIST OF MEASURING EQUIPMENTS 51**
- 7. TEST SETUP PHOTOGRAPHS OF EUT 52**
- 8. EXTERIOR PHOTOGRAPHS OF THE EUT 52**
- 9. INTERIOR PHOTOGRAPHS OF THE EUT 52**

1. GENERAL INFORMATION

1.1. Description of Device (EUT)

EUT : Android TV BOX

Model Number : KB2,KB2 PRO,BB2,BB2 PRO,KB2x,BB2x(NOTE:x=A-Z Any one of letters)

Model Declaration : PCB board, structure and internal of these model(s) are the same, So no additional models were tested

Test Model : KB2

Power Supply : DC 5.0V, 2.0A

Frequency Range : 2402.00~2480.00MHz; 2412.00~2462.00MHz; 5180.00-5240.00MHz; 5745.00-5825.00MHz

Bluetooth Version : V4.0

Channel Number : 79 Channels for BT V3.0;
40 Channels for BT LE;
11 Channels for WIFI 20MHz Bandwidth(802.11b/g/n-HT20);
4 Channels for 5180.00-5240.00MHz(802.11a/n-HT20/ac VHT20);
5 Channels for 5745.00-5825.00MHz(802.11a/n-HT20/ac VHT20);
2 Channels for 5190.00-5230.00MHz(802.11n-HT40/ac VHT40);
2 Channels for 5755.00-5795.00MHz(802.11n-HT40/ac VHT40);
1 Channels for 5210.00MHz(802.11 ac VHT80);
1 Channels for 5775.00MHz(802.11 ac VHT80)

Modulation Technology : BT V3.0: FHSS(GFSK, $\pi/4$ -DQPSK, 8-DPSK);
BT LE: DSSS(GFSK);
IEEE 802.11b: DSSS(CCK,DQPSK,DBPSK);
IEEE 802.11g: OFDM(64QAM, 16QAM, QPSK, BPSK);
IEEE 802.11n: OFDM(64QAM, 16QAM,QPSK,BPSK);
IEEE 802.11a: OFDM(64QAM, 16QAM,QPSK,BPSK);
IEEE 802.11ac: OFDM(64QAM, 16QAM,QPSK,BPSK)

Data Rates : BT V3.0: 1~3Mbps;
BT LE: 1Mbps;
IEEE 802.11b: 1-11Mbps;
IEEE 802.11g: 6-54Mbps;
IEEE 802.11n: MCS0-MCS7;
IEEE 802.11a: 6-54Mbps;
IEEE 802.11ac: MCS0-MCS15

Antenna Type And Gain : R-SMA antenna, 2.0dBi

1.2. Host System Configuration List and Details

Manufacturer	Description	Model	Serial Number	Certificate
SHENZHEN KEYU POWER SUPPLY TECHNOLOGY CO., LTD	AC/DC ADAPTER	KA23-050200 ODES	--	VoC

1.3. External I/O Port

I/O Port Description	Quantity	Cable
DC	1	N/A
AV	1	N/A
TF	1	N/A
USB	2	N/A
HDMI	1	1.5m, Shielded
RJ45	1	N/A
OPTICAL	1	N/A

1.4. Description of Test Facility

CNAS Registration Number. is L4595.
 FCC Registration Number. is 899208.
 Industry Canada Registration Number. is 9642A-1.
 VCCI Registration Number. is C-4260 and R-3804.
 ESMD Registration Number. is ARCB0108.
 UL Registration Number. is 100571-492.
 TUV SUD Registration Number. is SCN1081.
 TUV RH Registration Number. is UA 50296516-001

The 3m-Semi anechoic test site fulfils CISPR 16-1-4 according to ANSI C63.4:2014 and CISPR 16-1-4:2010 SVSWR requirement for radiated emission above 1GHz.

1.5. Statement of The Measurement Uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. To CISPR 16 – 4 “Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements” and is documented in the LCS quality system acc. To DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

1.6. Measurement Uncertainty

Test Item	Frequency Range	Uncertainty	Note
Radiation Uncertainty	9KHz~30MHz	±3.10dB	(1)
	30MHz~200MHz	±2.96dB	(1)
	200MHz~1000MHz	±3.10dB	(1)
	1GHz~26.5GHz	±3.80dB	(1)
	26.5GHz~40GHz	±3.90dB	(1)
Conduction Uncertainty	150kHz~30MHz	±1.63dB	(1)
Power disturbance	30MHz~300MHz	±1.60dB	(1)

(1). This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

1.7. Description Of Test Modes

The EUT has been tested under operating condition.

This test was performed with EUT in X, Y, Z position and the worse case was found when EUT in X position.

Worst-Case data rates were utilized from preliminary testing of the Chipset, worst-case data rates used during the testing are as follows:

IEEE 802.11a Mode: 6 Mbps, OFDM.

IEEE 802.11n-HT20 Mode: MCS0, OFDM.

IEEE 802.11n-HT40 Mode: MCS0, OFDM.

IEEE 802.11ac20 Mode: MCS0, OFDM.

IEEE 802.11ac40 Mode: MCS0, OFDM.

IEEE 802.11ac80 Mode: MCS0, OFDM.

Antenna & Bandwidth

Antenna Bandwidth Mode	Single (Port.1)			Two (Port.1 + Port.2)		
	20MHz	40MHz	80MHz	20MHz	40MHz	80MHz
IEEE 802.11a	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
IEEE 802.11n	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
IEEE 802.11ac	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

2. TEST METHODOLOGY

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

The radiated testing was performed at an antenna-to-EUT distance of 3 meters. All radiated and conducted emissions measurement was performed at Shenzhen LCS Compliance Testing Laboratory Ltd..

2.1. EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

2.2. EUT Exercise

The EUT was operated in the engineering mode to fix the TX frequency that was for the purpose of the measurements.

According to FCC's request, Test Procedure 789033 D02 General UNII Test Procedures New Rules v01r03 and KDB 6622911 are required to be used for this kind of FCC 15.407 UII device.

According to its specifications, the EUT must comply with the requirements of the Section 15.203, 15.205, 15.207, 15.209 and 15.407 under the FCC Rules Part 15 Subpart E

2.3. General Test Procedures

2.3.1 Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 6.2.1 of ANSI C63.10-2013 Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using Quasi-peak and average detector modes.

2.3.2 Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna, which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the maximum emissions, exploratory radiated emission measurements were made according to the requirements in Section 6.3 of ANSI C63.10-2013

3. SYSTEM TEST CONFIGURATION

3.1. Justification

The system was configured for testing in a continuous transmit condition.

3.2. EUT Exercise Software

N/A

3.3. Special Accessories

N/A

3.4. Block Diagram/Schematics

Please refer to the related document

3.5. Equipment Modifications

Shenzhen LCS Compliance Testing Laboratory Ltd. has not done any modification on the EUT.

3.6. Test Setup

Please refer to the test setup photo.

4. SUMMARY OF TEST RESULTS

Applied Standard: FCC Part 15 Subpart E		
FCC Rules	Description of Test	Result
§15.407(a)	Maximum Conducted Output Power	Compliant
§15.407(a)	Power Spectral Density	Compliant
§15.407(e)	6dB Bandwidth	Compliant
§15.407(b)	Radiated Emissions	Compliant
§15.407(b)	Band edge Emissions	Compliant
§15.407(g)	Frequency Stability	Note
§15.207(a)	Line Conducted Emissions	Compliant
§15.203	Antenna Requirements	Compliant
§2.1093	RF Exposure	Compliant

5. TEST RESULT

5.1. On Time and Duty Cycle

5.1.1. Standard Applicable

None; for reporting purpose only.


5.1.2. Measuring Instruments and Setting

Please refer to section 6 of equipments list in this report. The following table is the setting of the spectrum analyse.

5.1.3. Test Procedures

1. Set the centre frequency of the spectrum analyse to the transmitting frequency;
2. Set the span=0MHz, RBW=8MHz, VBW=50MHz, Sweep time=5ms;
3. Detector = peak;
4. Trace mode = Single hold.

5.1.4. Test Setup Layout

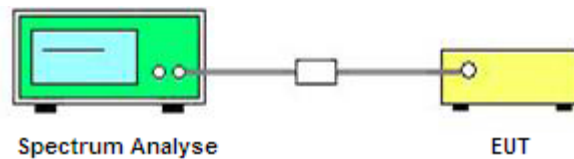

5.1.5. EUT Operation during Test


The EUT was programmed to be in continuously transmitting mode.

5.1.6. Test result

Mode	On Time B (ms)	Period (ms)	Duty Cycle x (Linear)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)	1/B Minimum VBW(KHz)
IEEE 802.11a	0.1757	0.2760	1	63.66	1.961	5.692
IEEE 802.11n-HT20	0.1636	0.2638	1	62.02	2.075	6.112
IEEE 802.11n-HT40	0.0996	0.1995	1	49.92	3.017	10.040
IEEE 802.11ac VHT20	0.1659	0.2675	1	62.02	2.075	6.028
IEEE 802.11ac VHT40	0.0914	0.1916	1	47.70	3.215	10.941
IEEE 802.11ac VHT80	0.0634	0.1636	1	38.75	4.117	15.773


Note: Duty Cycle Correction Factor= $10\log(1/\text{Duty cycle})$

Test plot of On Time and Duty Cycle

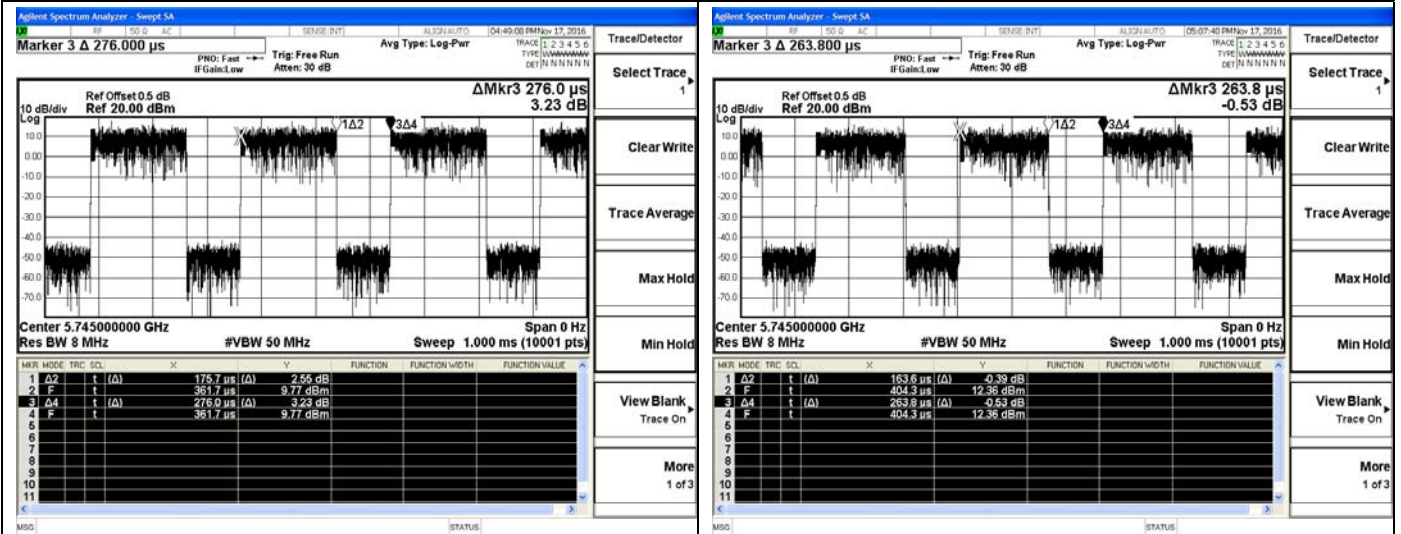


802.11a

802.11n-HT20

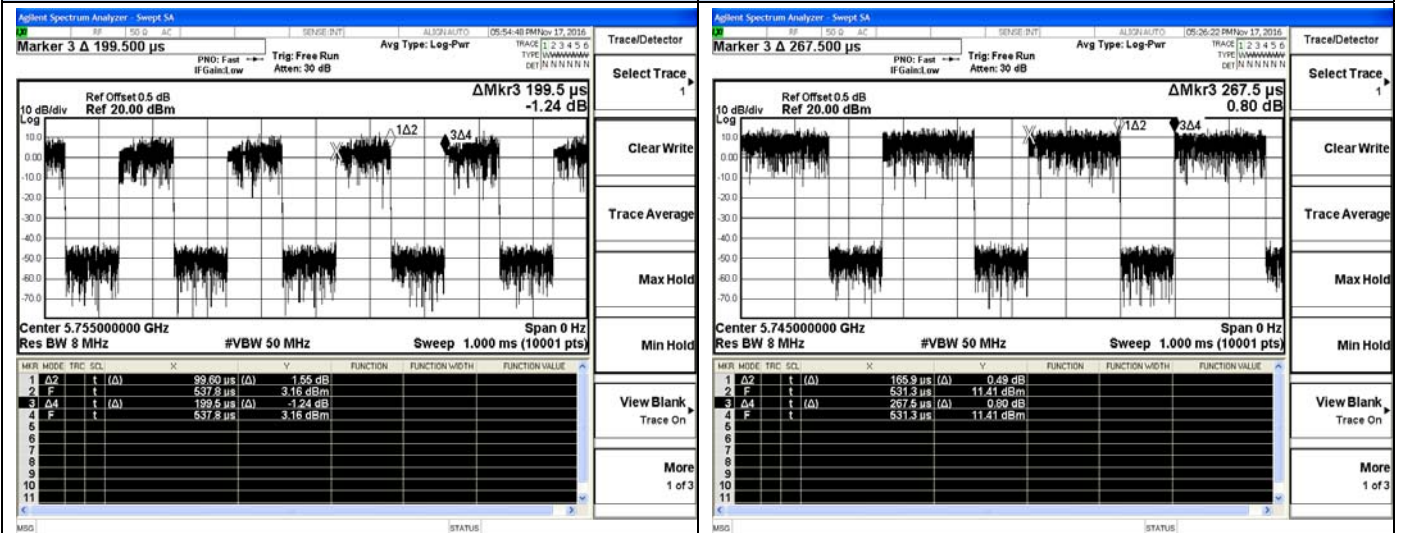

802.11n-HT40

802.11ac20

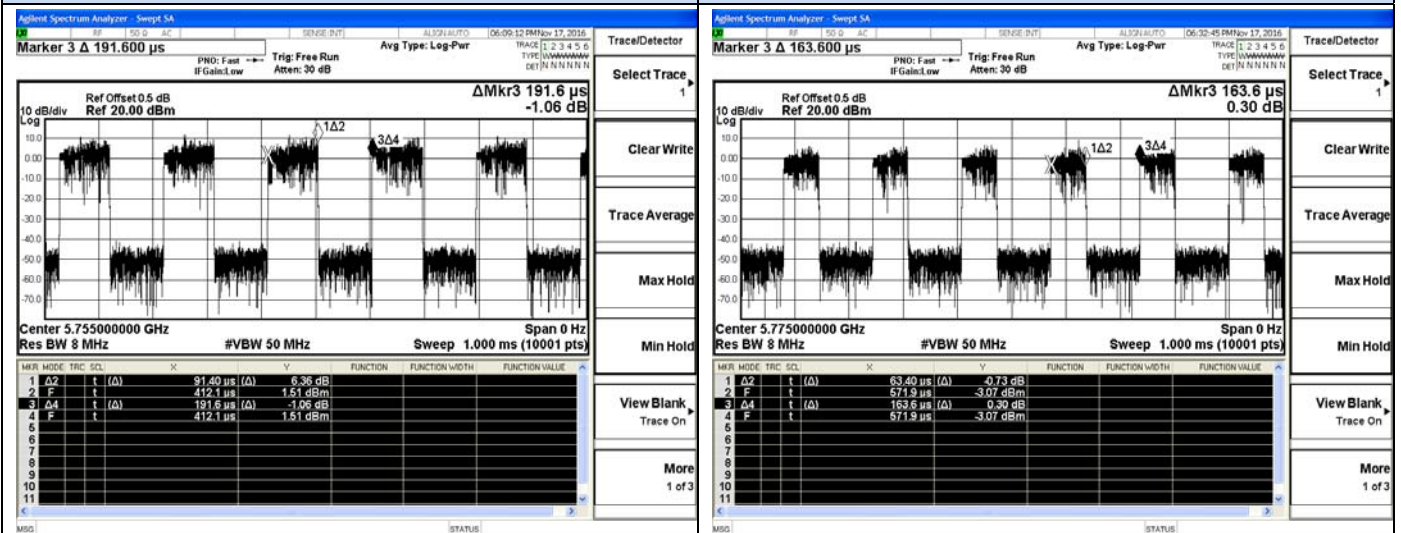

802.11ac40

802.11ac80

5.2. Maximum Conducted Output Power Measurement

5.2.1. Standard Applicable

For 5725~5850MHz

For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.


5.2.2. Measuring Instruments and Setting

Please refer to section 6 of equipments list in this report. The following table is the setting of the power meter.

5.2.3. Test Procedures

The transmitter output (antenna port) was connected to the power meter.

5.2.4. Test Setup Layout

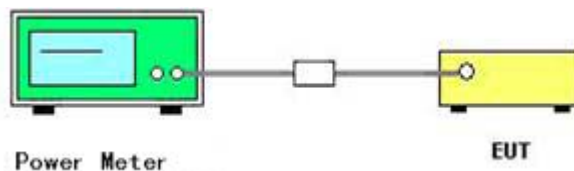

5.2.5. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

5.2.6. Test Result of Maximum Conducted Output Power

Temperature	25°C	Humidity	60%
Test Engineer	Jacky	Configurations	IEEE 802.11a/n/ac

Test Mode	Channel	Frequency (MHz)	AVG Conducted Power (dBm)	Duty Cycle Factor (dB)	Sum Power (dBm)	Max. Limit (dBm)	Result
IEEE 802.11a	149	5745	18.33	1.961	20.291	30	Complies
	157	5785	18.36	1.961	20.321	30	Complies
	165	5825	18.54	1.961	20.501	30	Complies

Test Mode	Channel	Frequency (MHz)	AVG Conducted Power (dBm)	Duty Cycle Factor (dB)	Sum Power (dBm)	Max. Limit (dBm)	Result
IEEE 802.11n-HT20	149	5745	17.39	2.075	19.465	30	Complies
	157	5785	17.57	2.075	19.645	30	Complies
	165	5825	17.12	2.075	19.195	30	Complies

Test Mode	Channel	Frequency (MHz)	AVG Conducted Power (dBm)	Duty Cycle Factor (dB)	Sum Power (dBm)	Max. Limit (dBm)	Result
IEEE 802.11n-HT40	151	5755	16.37	3.017	19.387	30	Complies
	159	5795	16.15	3.017	19.167	30	Complies

Test Mode	Channel	Frequency (MHz)	AVG Conducted Power (dBm)	Duty Cycle Factor (dB)	Sum Power (dBm)	Max. Limit (dBm)	Result
IEEE 802.11ac VHT20	149	5745	17.24	2.075	19.315	30	Complies
	157	5785	17.56	2.075	19.635	30	Complies
	165	5825	17.77	2.075	19.845	30	Complies

Test Mode	Channel	Frequency (MHz)	AVG Conducted Power (dBm)	Duty Cycle Factor (dB)	Sum Power (dBm)	Max. Limit (dBm)	Result
IEEE 802.11ac VHT40	151	5755	17.35	3.215	20.565	30	Complies
	159	5795	17.41	3.215	20.625	30	Complies

Test Mode	Channel	Frequency (MHz)	AVG Conducted Power (dBm)	Duty Cycle Factor (dB)	Sum Power (dBm)	Max. Limit (dBm)	Result
IEEE 802.11ac VHT80	155	5775	15.32	4.117	19.437	30	Complies

Note:

Sum Power(dBm)= AVG Conducted Power (dBm)+ Duty cycle factor

5.3. Power Spectral Density Measurement

5.3.1. Standard Applicable

For 5725~5850MHz

For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.


5.3.2. Measuring Instruments and Setting

Please refer to section 6 of equipments list in this report. The following table is the setting of Spectrum Analyzer.

5.3.3. Test Procedures

- 1). The transmitter was connected directly to a Spectrum Analyzer through a directional couple.
- 2). The power was monitored at the coupler port with a Spectrum Analyzer. The power level was set to the maximum level.
- 3). Set the RBW = 300kHz
- 4). Set the VBW $\geq 3 \times$ RBW
- 5). Span=Encompass the entire emissions bandwidth (EBW) of the signal
- 6). Detector = peak.
- 7). Sweep time = auto couple.
- 8). Trace mode = max hold.
- 9). Allow trace to fully stabilize.
- 10). Use the peak marker function to determine the maximum power level in any 1MHz band segment within the fundamental EBW.

5.3.4. Test Setup Layout

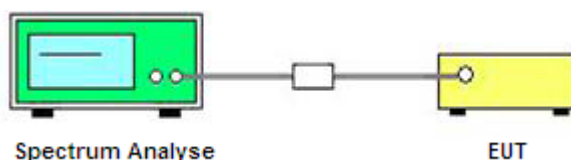

5.3.5. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

5.3.6. Test Result of Power Spectral Density

Temperature	25°C	Humidity	60%
Test Engineer	Jacky	Configurations	802.11a/n/ac

Test Mode	Channel	Frequency (MHz)	Power Density (dBm/300kHz)	10log(500kHz/RBW) Factor (dB)	Duty cycle factor (dB)	Sum PSD (dBm/500kHz)	Max. Limit (dBm/500kHz)	Result
IEEE 802.11a	149	5745	2.413	2.22	1.961	6.594	30	Complies
	157	5785	2.292	2.22	1.961	6.473	30	Complies
	165	5825	2.668	2.22	1.961	6.849	30	Complies

Test Mode	Channel	Frequency (MHz)	Power Density (dBm/300kHz)	10log(500kHz/RBW) Factor (dB)	Duty cycle factor (dB)	Sum PSD (dBm/500kHz)	Max. Limit (dBm/500kHz)	Result
IEEE 802.11n-HT20	149	5745	2.193	2.22	2.075	6.488	30	Complies
	157	5785	1.427	2.22	2.075	5.722	30	Complies
	165	5825	2.690	2.22	2.075	6.985	30	Complies

Test Mode	Channel	Frequency (MHz)	Power Density (dBm/300kHz)	10log(500kHz/RBW) Factor (dB)	Duty cycle factor (dB)	Sum PSD (dBm/500kHz)	Max. Limit (dBm/500kHz)	Result
IEEE 802.11n-HT40	151	5755	-1.182	2.22	3.017	4.055	30	Complies
	159	5795	-3.229	2.22	3.017	2.008	30	Complies

Test Mode	Channel	Frequency (MHz)	Power Density (dBm/300kHz)	10log(500kHz/RBW) Factor (dB)	Duty cycle factor (dB)	Sum PSD (dBm/500kHz)	Max. Limit (dBm/500kHz)	Result
IEEE 802.11ac VHT20	149	5745	2.311	2.22	2.075	6.606	30	Complies
	157	5785	1.504	2.22	2.075	5.799	30	Complies
	165	5825	1.881	2.22	2.075	6.176	30	Complies



Test Mode	Channel	Frequency (MHz)	Power Density (dBm/300kHz)	10log(500kHz/RBW) Factor (dB)	Duty cycle factor (dB)	Sum PSD (dBm/500kHz)	Max. Limit (dBm/500kHz)	Result
IEEE 802.11ac VHT40	151	5755	-1.068	2.22	3.215	4.367	30	Complies
	159	5795	-2.616	2.22	3.215	2.819	30	Complies

Test Mode	Channel	Frequency (MHz)	Power Density (dBm/300kHz)	10log(500kHz/RBW) Factor (dB)	Duty cycle factor (dB)	Sum PSD (dBm/500kHz)	Max. Limit (dBm/500kHz)	Result
IEEE 802.11ac VHT80	155	5775	-4.763	2.22	4.117	1.574	30	Complies

Note:



$$\text{Sum PSD(dBm/500kHz)} = \text{PSD(dBm/300kHz)} + \text{Duty cycle factor} + 10\log(500\text{kHz/RBW}) \text{ Factor}$$

Test plot of Power Spectral Density

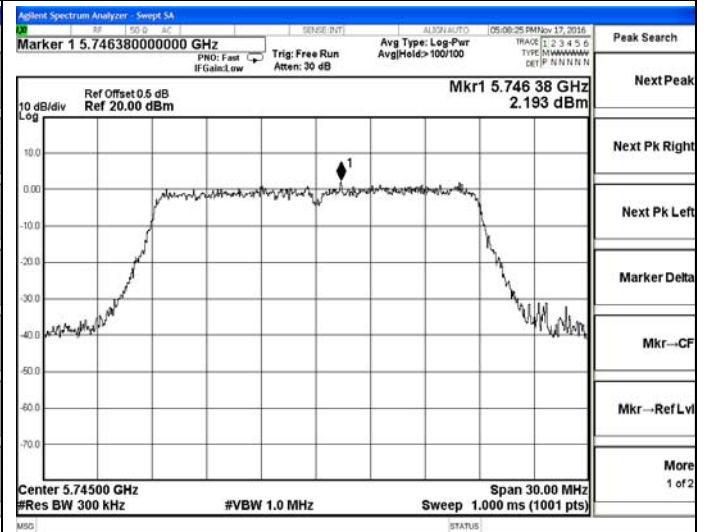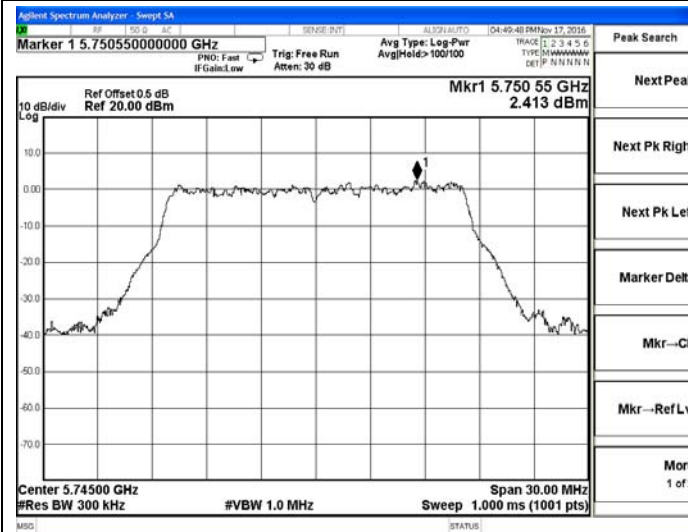



IEEE 802.11a-5745MHz

IEEE 802.11n-HT20-5745MHz

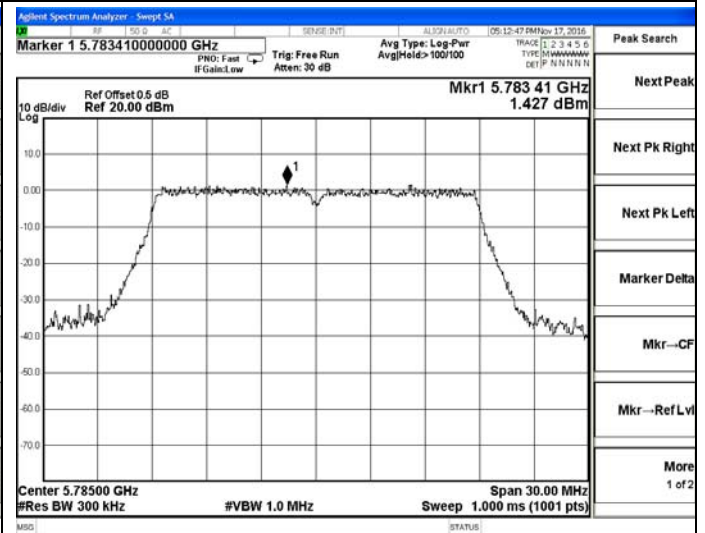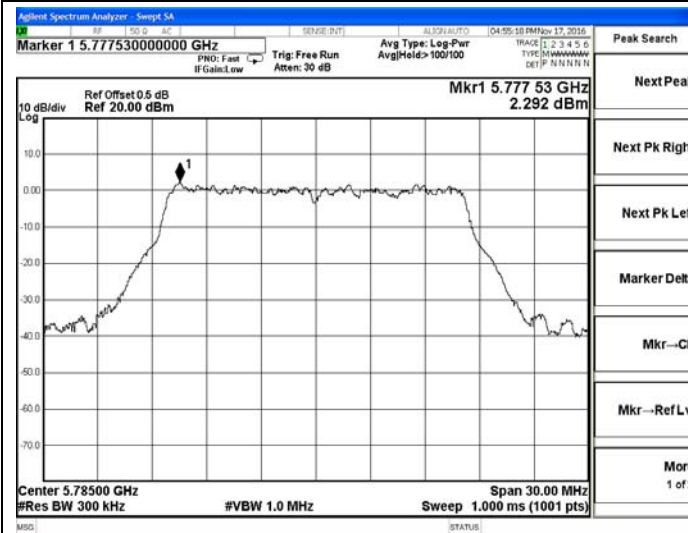

IEEE 802.11a-5785MHz



IEEE 802.11n-HT20-5785MHz

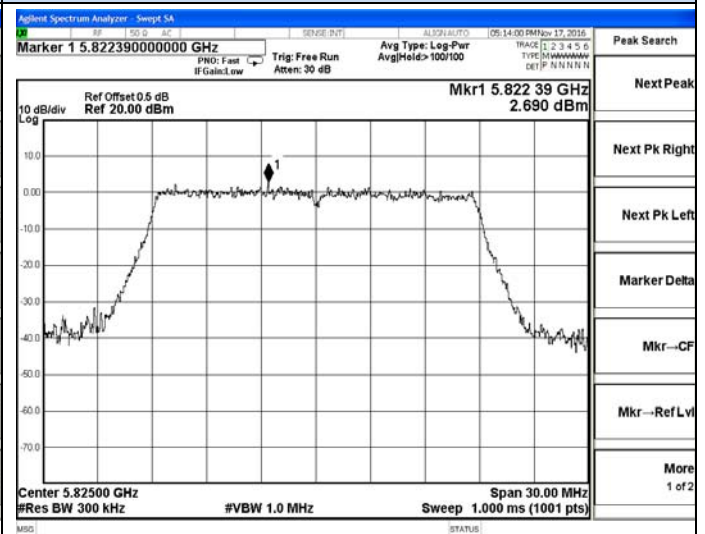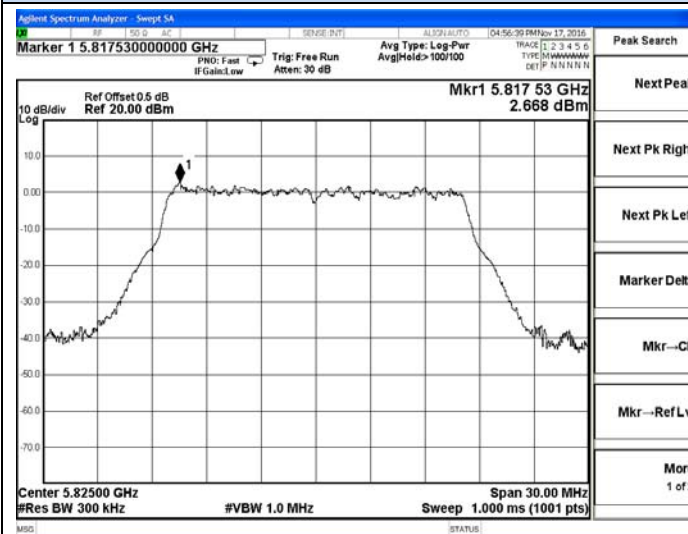

IEEE 802.11a-5825MHz



IEEE 802.11n-HT20-5825MHz

Test plot of Power Spectral Density

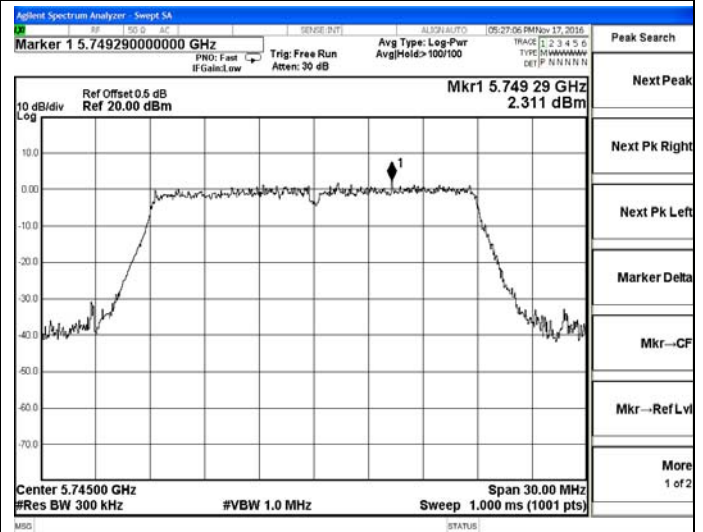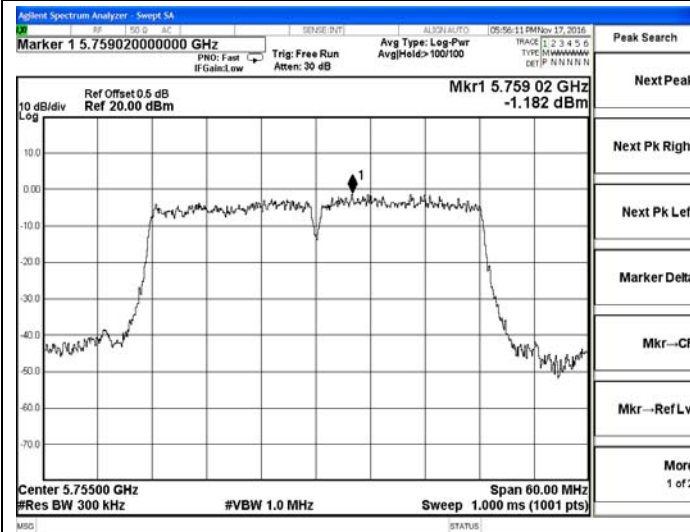


IEEE 802.11n-HT40-5755MHz

IEEE 802.11ac VHT20-5745MHz

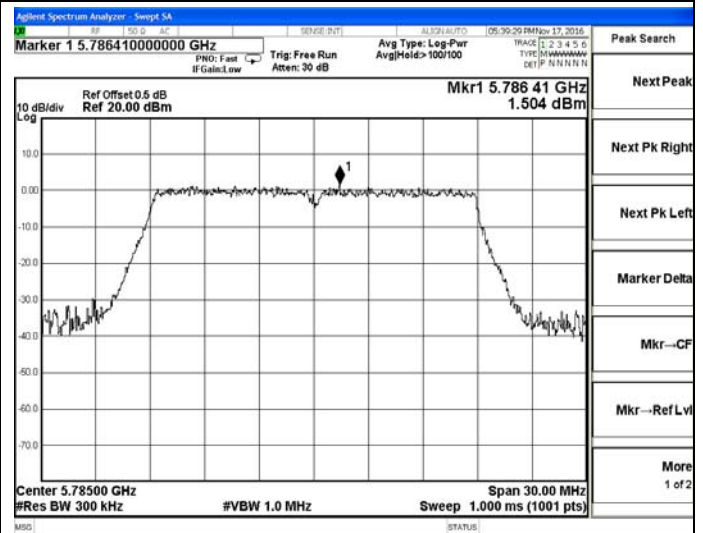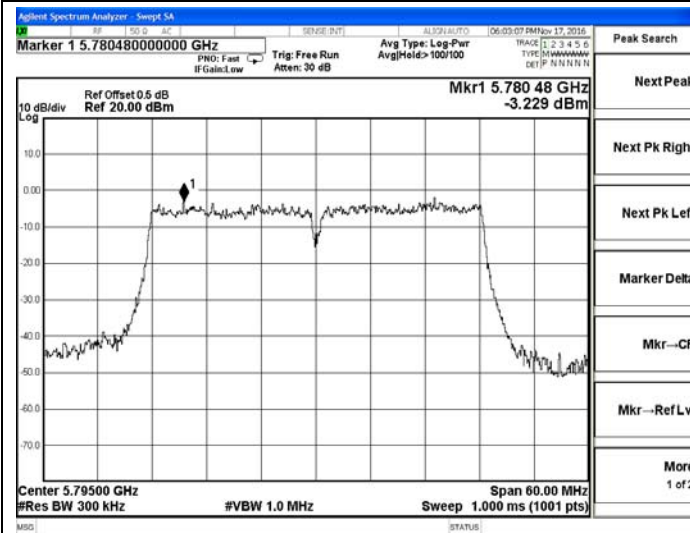



IEEE 802.11n-HT40-5795MHz

IEEE 802.11ac VHT20-5785MHz

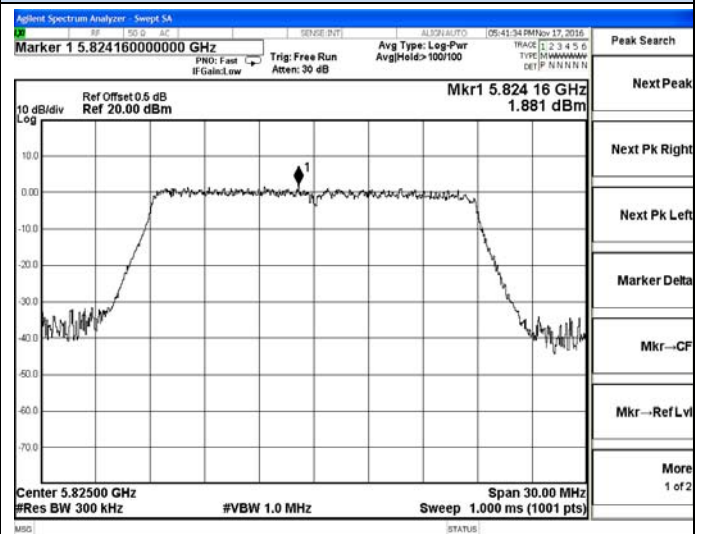


IEEE 802.11ac VHT20-5825MHz

Test plot of Power Spectral Density

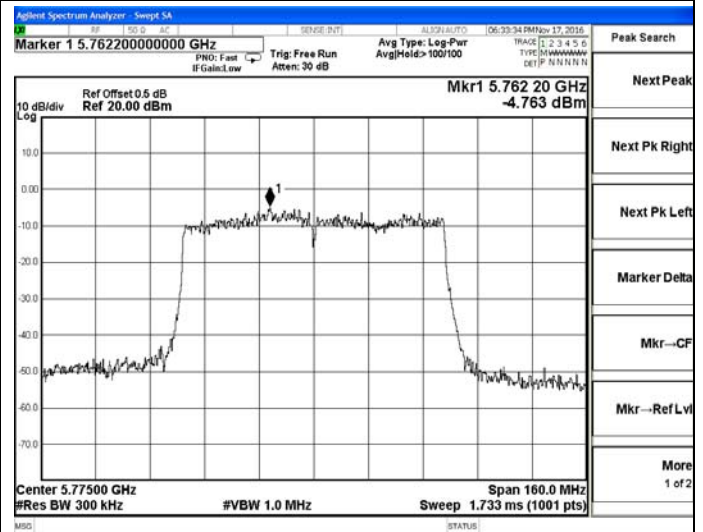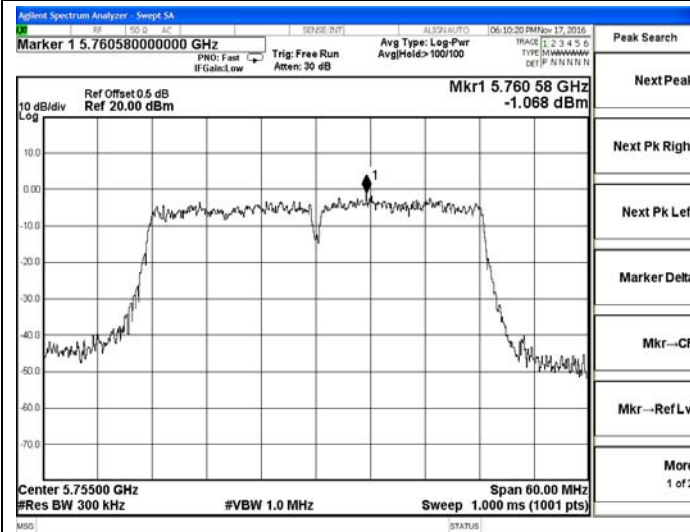

IEEE 802.11ac VHT40-5755MHz

IEEE 802.11ac VHT80-5775MHz

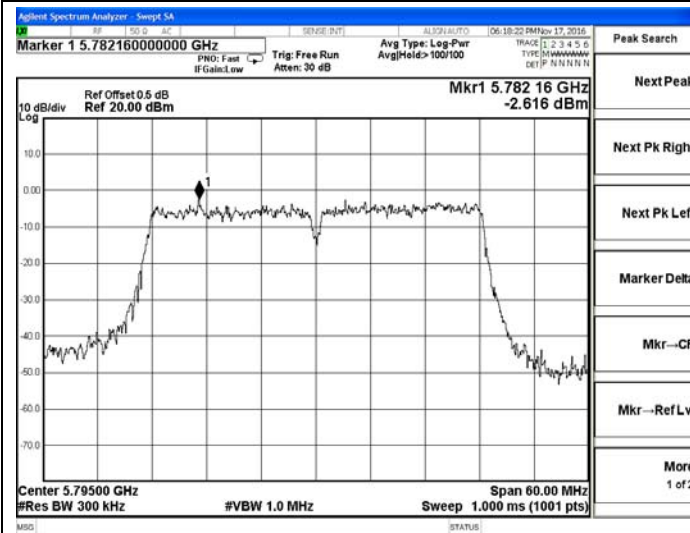

IEEE 802.11ac VHT40-5795MHz

5.4. 6dB Occupied Bandwidth Measurement

5.4.1. Standard Applicable

Within the 5.725-5.85 GHz band, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.

5.4.2. Measuring Instruments and Setting


Please refer to section 6 of equipments list in this report. The following table is the setting of the Spectrum Analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span	> 26dB Bandwidth
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

5.4.3. Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyser in peak hold mode.
2. The resolution bandwidth of 100 kHz and the video bandwidth of 300 kHz were used.
3. Measured the spectrum width with power higher than 6dB below carrier.

5.4.4. Test Setup Layout

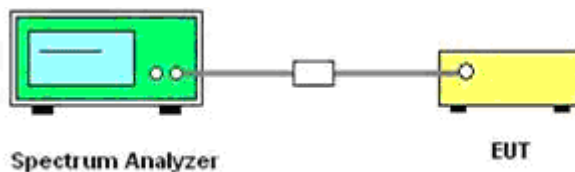

5.4.5. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

5.4.6. Test Result of 6dB Occupied Bandwidth

Temperature	25°C	Humidity	60%
Test Engineer	Jacky	Configurations	IEEE 802.11a/n/ac

Test Mode	Channel	Frequency (MHz)	6dB Bandwidth (MHz)
IEEE 802.11a	149	5745	16.40
	157	5785	16.43
	163	5825	16.37

Test Mode	Channel	Frequency (MHz)	6dB Bandwidth (MHz)
IEEE 802.11n-HT20	149	5745	17.73
	157	5785	17.69
	163	5825	17.69


Test Mode	Channel	Frequency (MHz)	6dB Bandwidth (MHz)
IEEE 802.11n-HT40	151	5755	36.10
	159	5795	36.38

Test Mode	Channel	Frequency (MHz)	6dB Bandwidth (MHz)
IEEE 802.11ac VHT20	149	5745	17.64
	157	5785	17.71
	163	5825	17.67

Test Mode	Channel	Frequency (MHz)	6dB Bandwidth (MHz)
IEEE 802.11ac VHT40	151	5755	36.10
	159	5795	36.38


Test Mode	Channel	Frequency (MHz)	6dB Bandwidth (MHz)
IEEE 802.11ac VHT80	155	5775	75.85

Test plot of 6dB Occupied Bandwidth

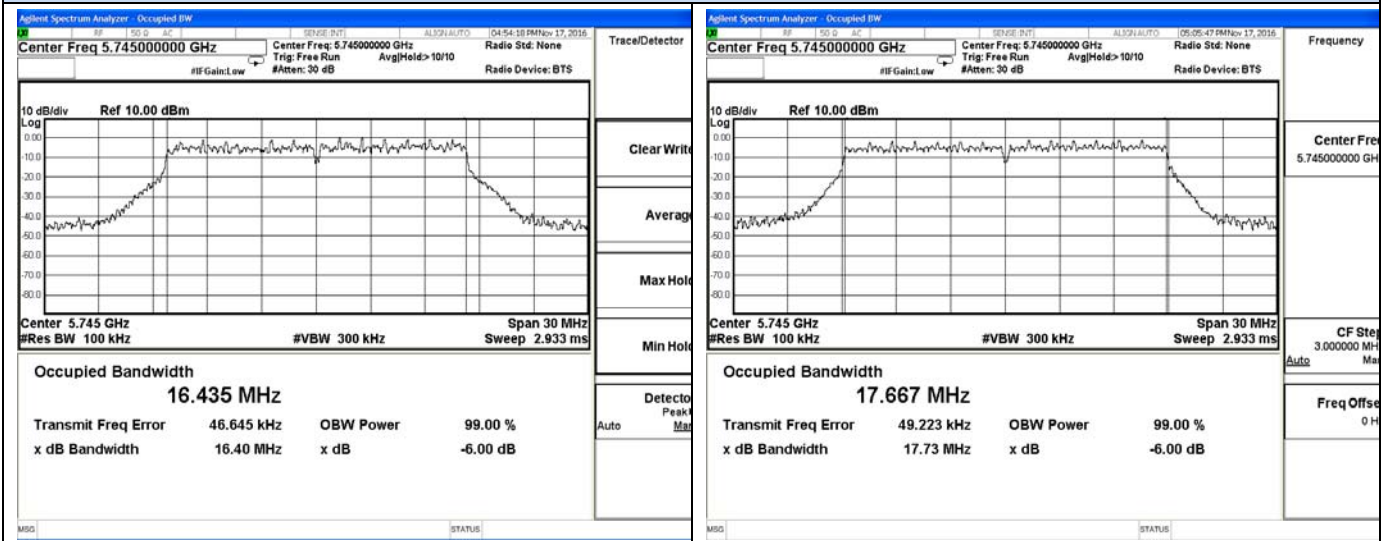


IEEE 802.11a-5745MHz

IEEE 802.11n-HT20-5745MHz

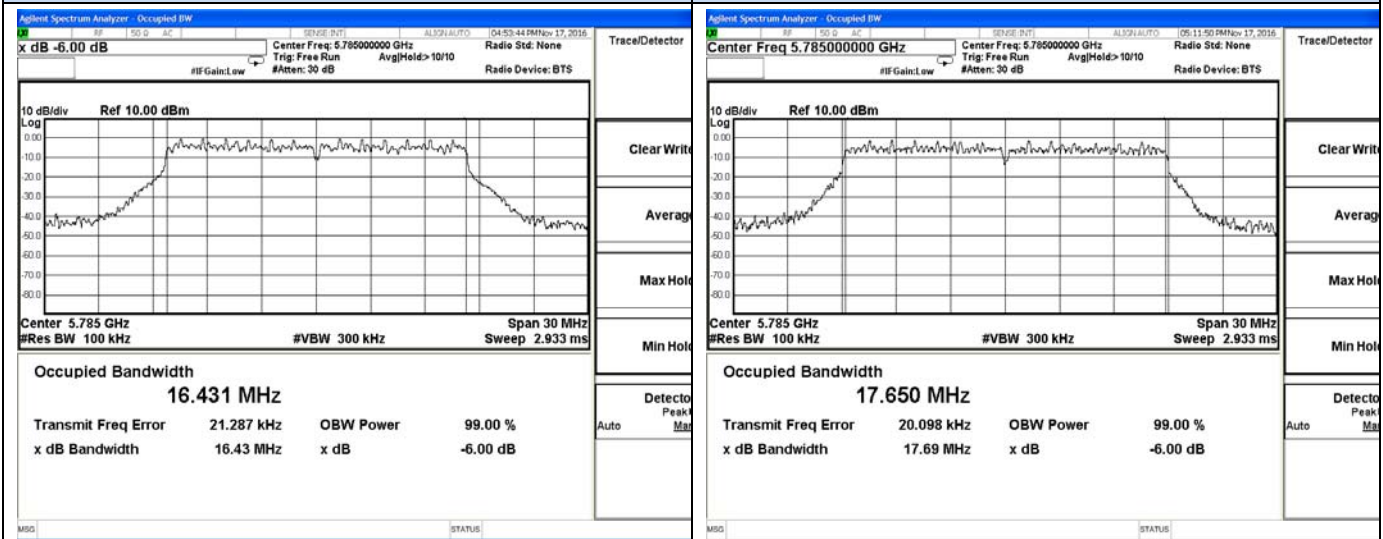

IEEE 802.11a-5785MHz



IEEE 802.11n-HT20-5785MHz

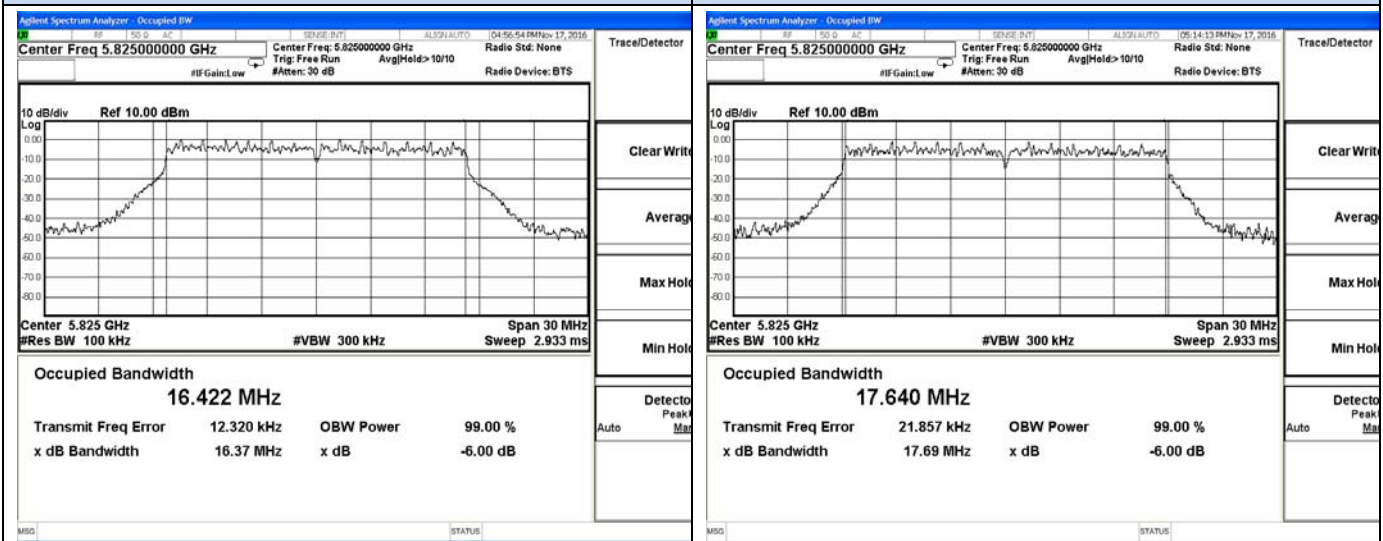

IEEE 802.11a-5825MHz



IEEE 802.11n-HT20-5825MHz

Test plot of 6dB Occupied Bandwidth

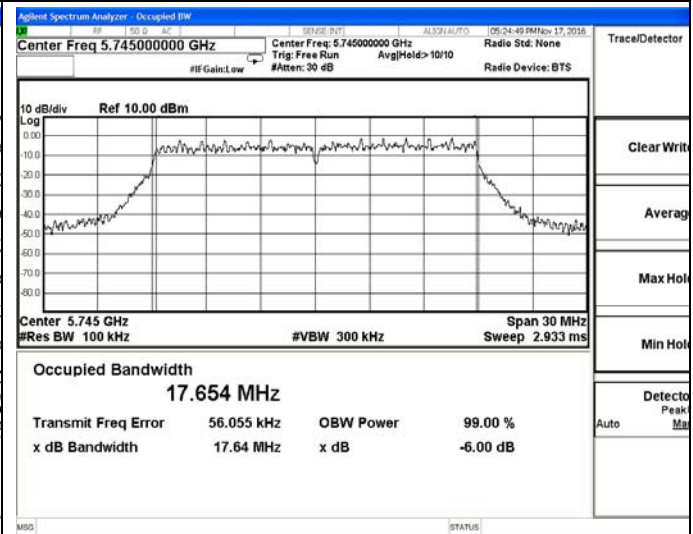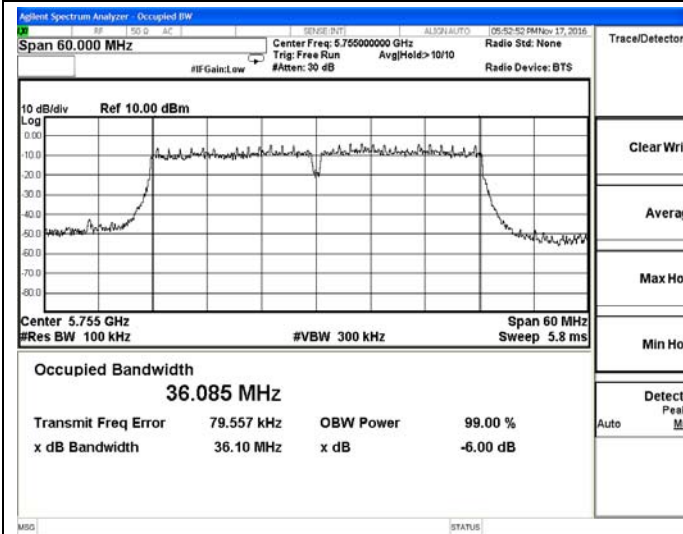



IEEE 802.11n-HT40-5755MHz

IEEE 802.11ac VHT20-5745MHz

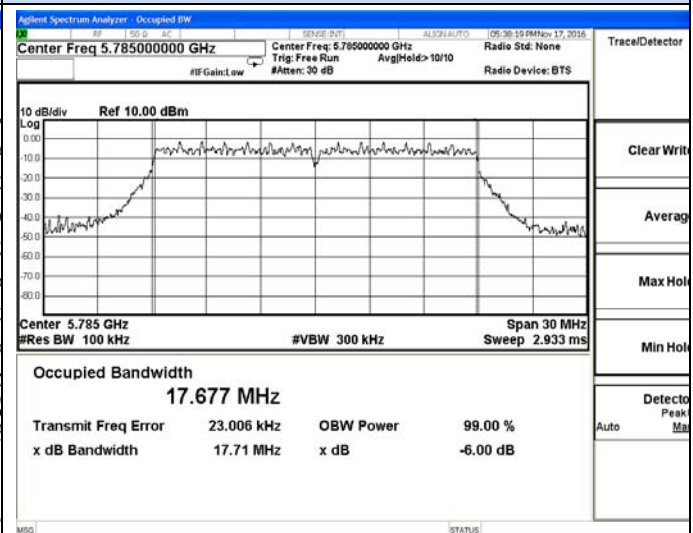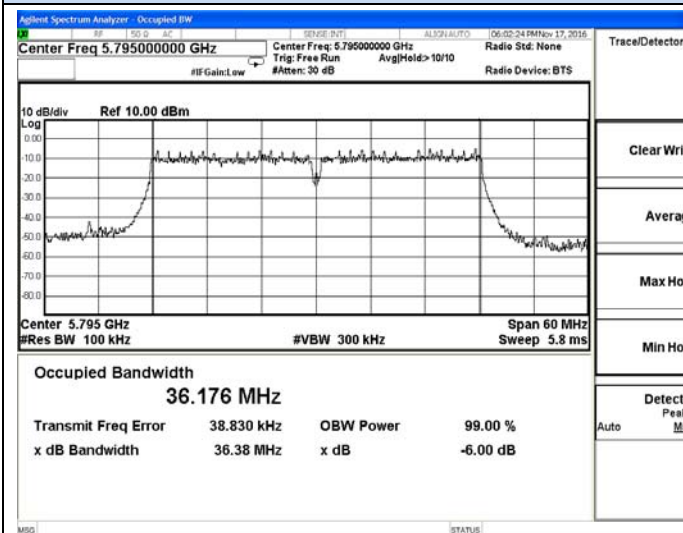


IEEE 802.11n-HT40-5795MHz

IEEE 802.11ac VHT20-5785MHz

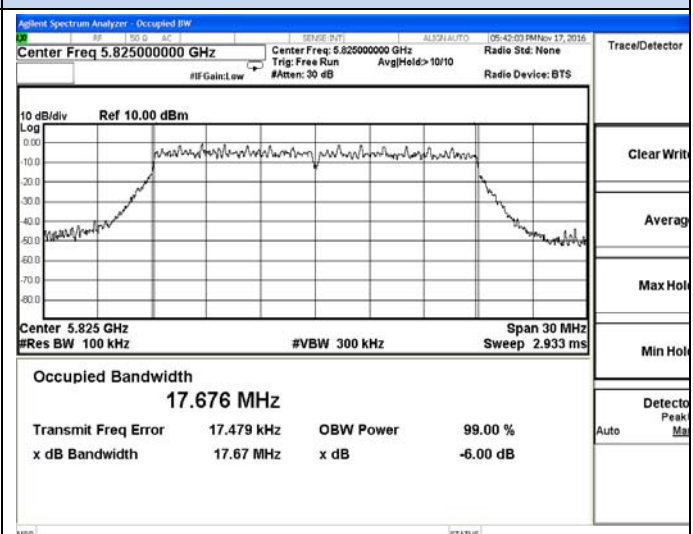


IEEE 802.11ac VHT20-5825MHz

Test plot of 6dB Occupied Bandwidth

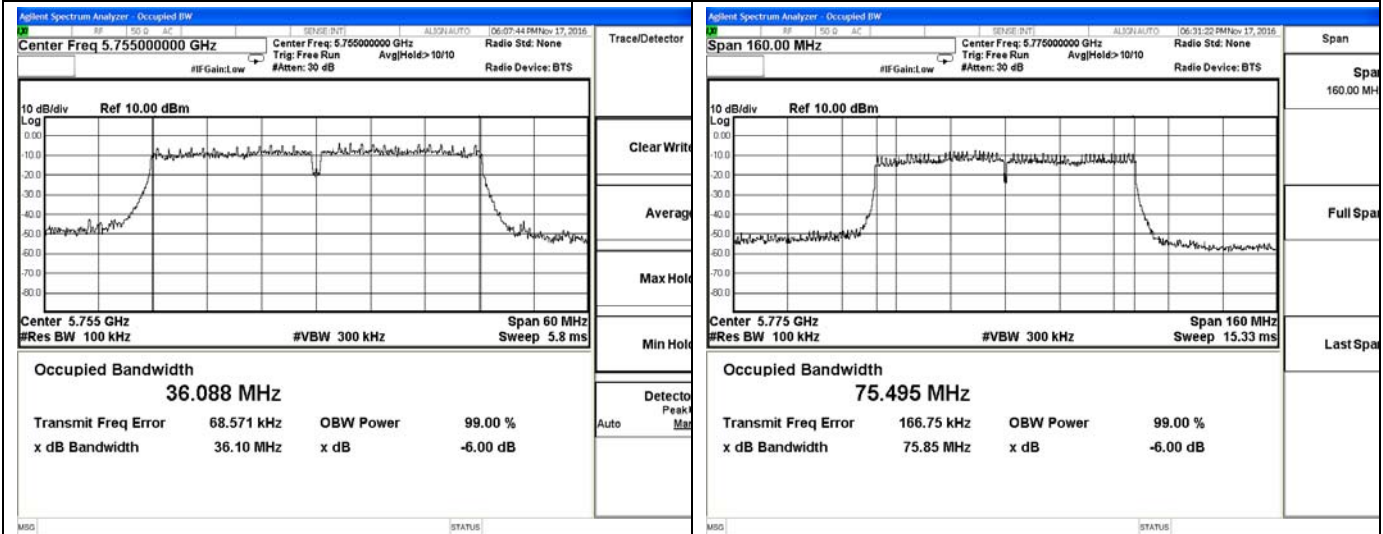

IEEE 802.11ac VHT40-5755MHz

IEEE 802.11ac VHT80-5775MHz

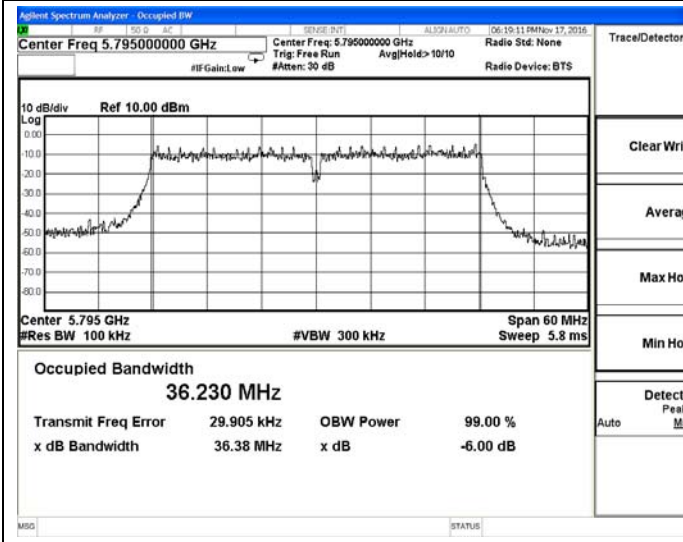

IEEE 802.11ac VHT40-5795MHz

5.5. Radiated Emissions Measurement

5.5.1. Standard Applicable

15.205 (a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
\1\ 0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(\2)
13.36-13.41			

\1\ Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

\2\ Above 38.6

For transmitters operating in the 5.725-5.85 GHz band:

All emissions shall be limited to a level of -27 dBm/MHz(68.2dBuV/m at 3m) at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz(105.2dBuV/m at 3m) at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6(110.8dBuV/m at 3m) dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz(122.2dBuV/m at 3m) at the band edge.

In addition, In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

5.5.2. Measuring Instruments and Setting

Please refer to section 6 of equipments list in this report. The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB (Emission in restricted band)	1MHz / 1MHz for Peak, 1 MHz / 1/B kHz for Average
RB / VB (Emission in non-restricted band)	1MHz / 1MHz for Peak, 1 MHz / 1/B kHz for Average

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 100kHz for QP

5.5.3. Test Procedures

1) Sequence of testing 9 kHz to 30 MHz

Setup:

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a rotatable table with 0.8 m height is used.
- If the EUT is a floor standing device, it is placed on the ground.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions.
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 3 meter.
- The EUT was set into operation.

Premeasurement:

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna height is 0.8 meter.
- At each turntable position the analyzer sweeps with peak detection to find the maximum of all emissions

Final measurement:

- Identified emissions during the premeasurement the software maximizes by rotating the turntable position (0° to 360°) and by rotating the elevation axes (0° to 360°).
- The final measurement will be done in the position (turntable and elevation) causing the highest emissions with QPK detector.
- The final levels, frequency, measuring time, bandwidth, turntable position, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement and the limit will be stored.

2) Sequence of testing 30 MHz to 1 GHz

Setup:

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a table with 0.8 m height is used, which is placed on the ground plane.
- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 3 meter.
- The EUT was set into operation.

Premeasurement:

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna is polarized vertical and horizontal.
- The antenna height changes from 1 to 3 meter.
- At each turntable position, antenna polarization and height the analyzer sweeps three times in peak to find the maximum of all emissions.

Final measurement:

- The final measurement will be performed with minimum the six highest peaks.
- According to the maximum antenna and turntable positions of premeasurement the software maximize the peaks by changing turntable position ($\pm 45^\circ$) and antenna movement between 1 and 4 meter.
- The final measurement will be done with QP detector with an EMI receiver.
- The final levels, frequency, measuring time, bandwidth, antenna height, antenna polarization, turntable angle, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement with marked maximum final measurements and the limit will be stored.

3) Sequence of testing 1 GHz to 18 GHz

Setup:

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a rotatable table with 1.5 m height is used.
- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 3 meter.
- The EUT was set into operation.

Premeasurement:

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna is polarized vertical and horizontal.
- The antenna height scan range is 1 meter to 2.5 meter.
- At each turntable position and antenna polarization the analyzer sweeps with peak detection to find the maximum of all emissions.

Final measurement:

- The final measurement will be performed with minimum the six highest peaks.
- According to the maximum antenna and turntable positions of premeasurement the software maximize the peaks by changing turntable position ($\pm 45^\circ$) and antenna movement between 1 and 4 meter. This procedure is repeated for both antenna polarizations.
- The final measurement will be done in the position (turntable, EUT-table and antenna polarization) causing the highest emissions with Peak and Average detector.
- The final levels, frequency, measuring time, bandwidth, turntable position, EUT-table position, antenna polarization, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement with marked maximum final measurements and the limit will be stored.

4) Sequence of testing above 18 GHz

Setup:

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a rotatable table with 1.5 m height is used.
- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 1 meter.
- The EUT was set into operation.

Premeasurement:


- The antenna is moved spherical over the EUT in different polarisations of the antenna.

Final measurement:


- The final measurement will be performed at the position and antenna orientation for all detected emissions that were found during the premeasurements with Peak and Average detector.
- The final levels, frequency, measuring time, bandwidth, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement and the limit will be stored.

5.5.4. Test Setup Layout


For radiated emissions below 30MHz

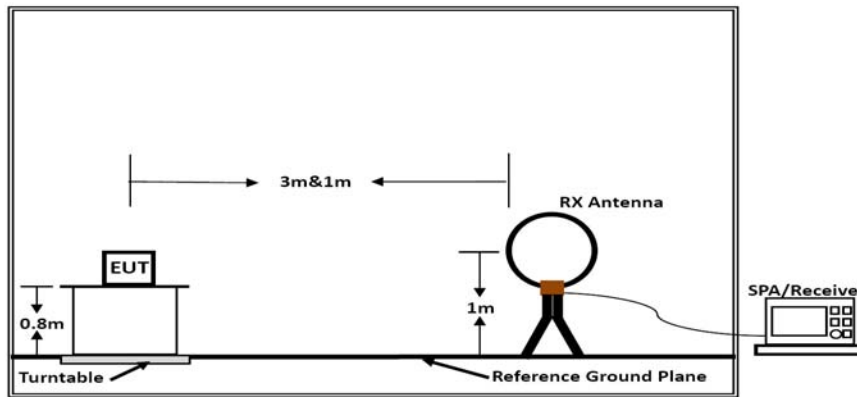

Below 30MHz

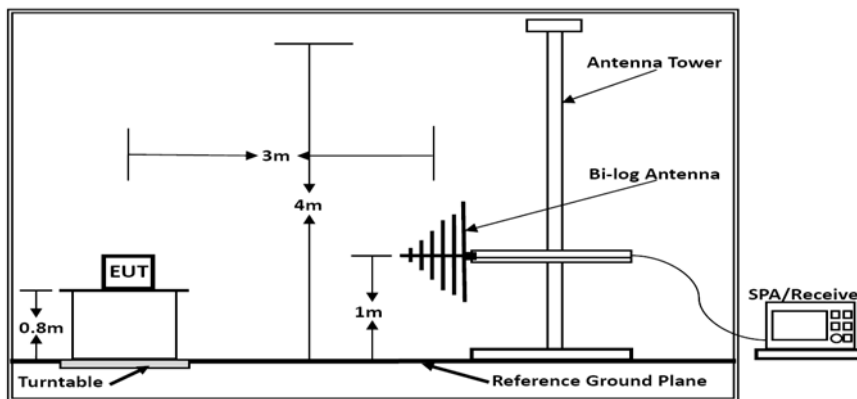

Below 1GHz

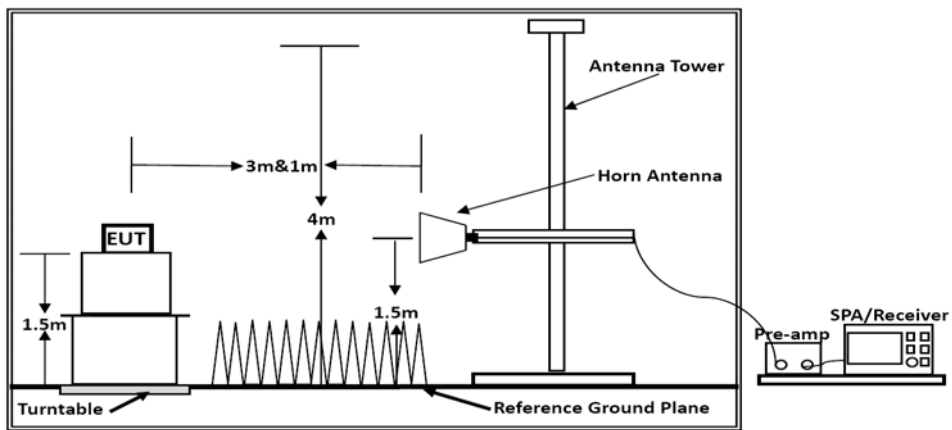

Above 1GHz

Above 10 GHz shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade from 3m to 1.5m.

Distance extrapolation factor = $20 \log (\text{specific distance } [3\text{m}] / \text{test distance } [1.5\text{m}])$ (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor [6 dB].

5.5.5. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

5.5.6. Results of Radiated Emissions (9kHz~30MHz)

Temperature	25°C	Humidity	60%
Test Engineer	Jacky	Configurations	802.11a/n/ac

Freq. (MHz)	Level (dBUV)	Over Limit (dB)	Over Limit (dBUV)	Remark
-	-	-	-	See Note

Note:

The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.


Distance extrapolation factor = 40 log (specific distance / test distance) (dB);

Limit line = specific limits (dBUV) + distance extrapolation factor.

5.4.7. Results of Radiated Emissions (30MHz~1GHz)

Temperature	25°C	Humidity	60%
Test Engineer	Jacky	Configurations	IEEE 802.11a, 5825MHz


Test result for IEEE 802.11a-5825MHz

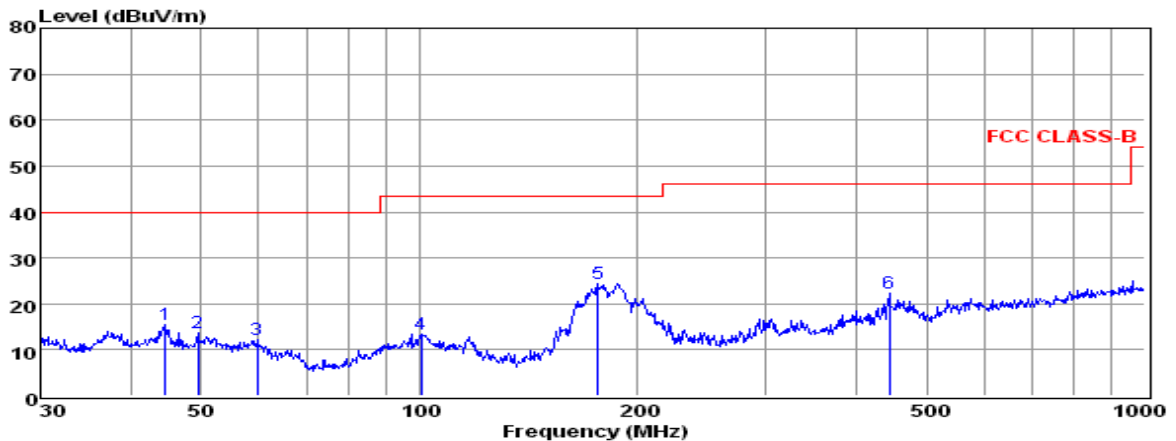

Env./Ins: 24°C/56%
 pol: HORIZONTAL

	Freq MHz	Reading dBUV	CabLos dB	Antfac dB/m	Measured dBUV/m	Limit dBUV/m	Over dB	Remark
1	44.59	1.57	0.41	13.55	15.53	40.00	-24.47	QP
2	49.53	-0.02	0.54	13.28	13.80	40.00	-26.20	QP
3	59.65	-1.04	0.49	12.71	12.16	40.00	-27.84	QP
4	100.58	-0.43	0.60	13.11	13.28	43.50	-30.22	QP
5	176.27	14.21	0.73	9.42	24.36	43.50	-19.14	QP
6	444.85	5.22	1.42	15.57	22.21	46.00	-23.79	QP

Note: 1. All readings are Quasi-peak values.
 2. Measured= Reading + Antenna Factor + Cable Loss
 3. The emission that are 20db below the official limit are not reported

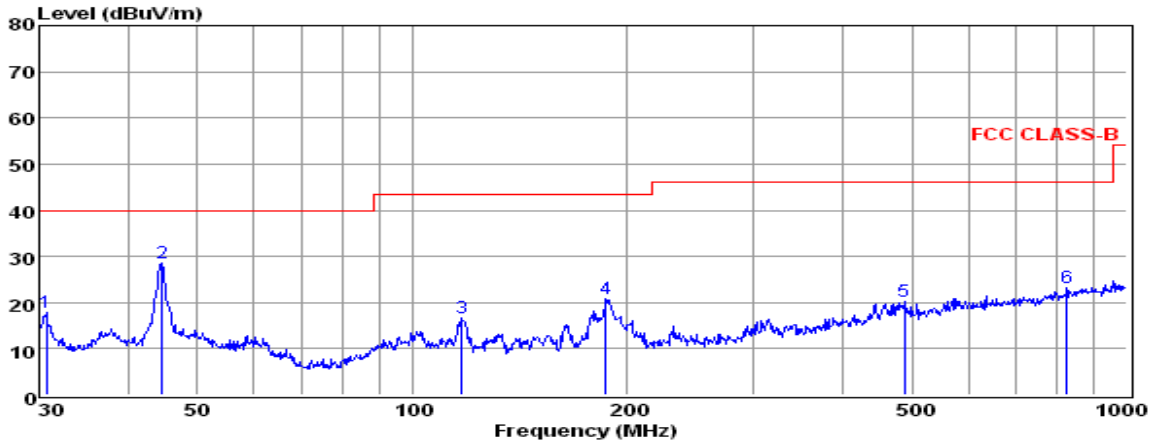

Env./Ins: 24 °C / 56%
 pol: VERTICAL

	Freq MHz	Reading dBuV	CabLos dB	Antfac dB/m	Measured dBuV/m	Limit dBuV/m	Over dB	Remark
1	30.75	5.01	0.39	12.33	17.73	40.00	-22.27	QP
2	44.59	14.72	0.41	13.55	28.68	40.00	-11.32	QP
3	117.36	5.04	0.68	10.95	16.67	43.50	-26.83	QP
4	186.44	9.69	0.98	10.25	20.92	43.50	-22.58	QP
5	489.03	2.75	1.32	16.30	20.37	46.00	-25.63	QP
6	824.60	1.05	1.80	20.31	23.16	46.00	-22.84	QP

Note: 1. All readings are Quasi-peak values.
 2. Measured= Reading + Antenna Factor + Cable Loss
 3. The emission that are 20db below the official limit are not reported

Note:

Pre-scan all mode and recorded the worst case results in this report (IEEE 802.11a-5825MHz).
 Emission level (dBuV/m) = 20 log Emission level (uV/m).
 Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

5.5.8. Results for Radiated Emissions (Above 1GHz)

IEEE 802.11a

Channel 149

Freq GHz	Read Level dBuV	Ant. Fac dB/m	Pre. Fac dB	Cab.Los dB	Measured Level dBuV	Limit Line dBuV/m	Over limit dB	Remark	Pol/Phase
17.235	59.96	33.23	35.04	3.91	62.06	68.2	-11.94	Peak	Horizontal
17.235	44.65	33.23	35.04	3.91	46.75	54.0	-7.25	Average	Horizontal
17.235	58.34	33.23	35.04	3.91	60.44	68.2	-13.56	Peak	Vertical
17.235	41.02	33.23	35.04	3.91	43.12	54.0	-10.88	Average	Vertical

Channel 157

Freq GHz	Read Level dBuV	Ant. Fac dB/m	Pre. Fac dB	Cab.Los dB	Measured Level dBuV	Limit Line dBuV/m	Over limit dB	Remark	Pol/Phase
17.355	60.81	33.27	35.15	3.93	62.86	68.2	-11.14	Peak	Horizontal
17.355	44.18	33.27	35.15	3.93	46.23	54.0	-7.77	Average	Horizontal
17.355	58.16	33.27	35.15	3.93	60.21	68.2	-13.79	Peak	Vertical
17.355	41.49	33.27	35.15	3.93	43.54	54.0	-10.46	Average	Vertical

Channel 163

Freq GHz	Read Level dBuV	Ant. Fac dB/m	Pre. Fac dB	Cab.Los dB	Measured Level dBuV	Limit Line dBuV/m	Over limit dB	Remark	Pol/Phase
17.475	60.52	33.32	35.14	3.97	62.67	68.2	-11.33	Peak	Horizontal
17.475	44.04	33.32	35.14	3.97	46.19	54.0	-7.81	Average	Horizontal
17.475	58.37	33.32	35.14	3.97	60.52	68.2	-13.48	Peak	Vertical
17.475	40.87	33.32	35.14	3.97	43.02	54.0	-10.98	Average	Vertical

IEEE 802.11n-HT20

Channel 149

Freq GHz	Read Level dBuV	Ant. Fac dB/m	Pre. Fac dB	Cab.Los dB	Measured Level dBuV	Limit Line dBuV/m	Over limit dB	Remark	Pol/Phase
17.235	60.61	33.23	35.04	3.91	62.71	68.2	-11.29	Peak	Horizontal
17.235	43.93	33.23	35.04	3.91	46.03	54.0	-7.97	Average	Horizontal
17.235	58.32	33.23	35.04	3.91	60.42	68.2	-13.58	Peak	Vertical
17.235	41.49	33.23	35.04	3.91	43.59	54.0	-10.41	Average	Vertical

Channel 157

Freq GHz	Read Level dBuV	Ant. Fac dB/m	Pre. Fac dB	Cab.Los dB	Measured Level dBuV	Limit Line dBuV/m	Over limit dB	Remark	Pol/Phase
17.355	60.59	33.27	35.15	3.93	62.64	68.2	-11.36	Peak	Horizontal
17.355	44.18	33.27	35.15	3.93	46.23	54.0	-7.77	Average	Horizontal
17.355	58.03	33.27	35.15	3.93	60.08	68.2	-13.92	Peak	Vertical
17.355	41.40	33.27	35.15	3.93	43.45	54.0	-10.55	Average	Vertical

Channel 163

Freq GHz	Read Level dBuV	Ant. Fac dB/m	Pre. Fac dB	Cab.Los dB	Measured Level dBuV	Limit Line dBuV/m	Over limit dB	Remark	Pol/Phase
17.475	60.63	33.32	35.14	3.97	62.78	68.2	-11.22	Peak	Horizontal
17.475	44.67	33.32	35.14	3.97	46.82	54.0	-7.18	Average	Horizontal
17.475	58.26	33.32	35.14	3.97	60.41	68.2	-13.59	Peak	Vertical
17.475	40.86	33.32	35.14	3.97	43.01	54.0	-10.99	Average	Vertical

IEEE 802.11n-HT40

Channel 151

Freq GHz	Read Level dBuV	Ant. Fac dB/m	Pre. Fac dB	Cab.Los dB	Measured Level dBuV	Limit Line dBuV/m	Over limit dB	Remark	Pol/Phase
17.265	58.29	33.23	35.04	3.91	60.39	68.2	-13.61	Peak	Horizontal
17.265	42.15	33.23	35.04	3.91	44.25	54.0	-9.75	Average	Horizontal
17.265	55.91	33.23	35.04	3.91	58.01	68.2	-15.99	Peak	Vertical
17.265	40.68	33.23	35.04	3.91	42.78	54.0	-11.22	Average	Vertical

Channel 159

Freq GHz	Read Level dBuV	Ant. Fac dB/m	Pre. Fac dB	Cab.Los dB	Measured Level dBuV	Limit Line dBuV/m	Over limit dB	Remark	Pol/Phase
17.385	57.98	33.27	35.15	3.93	60.03	68.2	-13.97	Peak	Horizontal
17.385	42.73	33.27	35.15	3.93	44.78	54.0	-9.22	Average	Horizontal
17.385	56.36	33.27	35.15	3.93	58.41	68.2	-15.59	Peak	Vertical
17.385	40.41	33.27	35.15	3.93	42.46	54.0	-11.54	Average	Vertical

IEEE 802.11ac20

Channel 149

Freq GHz	Read Level dBuV	Ant. Fac dB/m	Pre. Fac dB	Cab.Los dB	Measured Level dBuV	Limit Line dBuV/m	Over limit dB	Remark	Pol/Phase
17.235	59.01	33.23	35.04	3.91	61.11	68.2	-12.89	Peak	Horizontal
17.235	43.42	33.23	35.04	3.91	45.52	54.0	-8.48	Average	Horizontal
17.235	57.88	33.23	35.04	3.91	59.98	68.2	-14.02	Peak	Vertical
17.235	41.53	33.23	35.04	3.91	43.63	54.0	-10.37	Average	Vertical

Channel 157

Freq GHz	Read Level dBuV	Ant. Fac dB/m	Pre. Fac dB	Cab.Los dB	Measured Level dBuV	Limit Line dBuV/m	Over limit dB	Remark	Pol/Phase
17.355	59.18	33.27	35.15	3.93	61.23	68.2	-12.77	Peak	Horizontal
17.355	43.36	33.27	35.15	3.93	45.41	54.0	-8.59	Average	Horizontal
17.355	57.84	33.27	35.15	3.93	59.89	68.2	-14.11	Peak	Vertical
17.355	41.49	33.27	35.15	3.93	43.54	54.0	-10.46	Average	Vertical

Channel 163

Freq GHz	Read Level dBuV	Ant. Fac dB/m	Pre. Fac dB	Cab.Los dB	Measured Level dBuV	Limit Line dBuV/m	Over limit dB	Remark	Pol/Phase
17.475	59.6	33.32	35.14	3.97	61.75	68.2	-12.25	Peak	Horizontal
17.475	43.31	33.32	35.14	3.97	45.46	54.0	-8.54	Average	Horizontal
17.475	57.02	33.32	35.14	3.97	59.17	68.2	-14.83	Peak	Vertical
17.475	41.69	33.32	35.14	3.97	43.84	54.0	-10.16	Average	Vertical

IEEE 802.11ac40

Channel 151

Freq GHz	Read Level dBuV	Ant. Fac dB/m	Pre. Fac dB	Cab.Los dB	Measured Level dBuV	Limit Line dBuV/m	Over limit dB	Remark	Pol/Phase
17.265	58.48	33.23	35.04	3.91	60.58	68.2	-13.42	Peak	Horizontal
17.265	42.52	33.23	35.04	3.91	44.62	54.0	-9.38	Average	Horizontal
17.265	55.65	33.23	35.04	3.91	57.75	68.2	-16.25	Peak	Vertical
17.265	40.04	33.23	35.04	3.91	42.14	54.0	-11.86	Average	Vertical

Channel 159

Freq GHz	Read Level dBuV	Ant. Fac dB/m	Pre. Fac dB	Cab.Los dB	Measured Level dBuV	Limit Line dBuV/m	Over limit dB	Remark	Pol/Phase
17.385	58.52	33.27	35.15	3.93	60.57	68.2	-13.43	Peak	Horizontal
17.385	41.97	33.27	35.15	3.93	44.02	54.0	-9.98	Average	Horizontal
17.385	55.36	33.27	35.15	3.93	57.41	68.2	-16.59	Peak	Vertical
17.385	40.64	33.27	35.15	3.93	42.69	54.0	-11.31	Average	Vertical

IEEE 802.11ac80

Channel 155

Freq GHz	Read Level dBuV	Ant. Fac dB/m	Pre. Fac dB	Cab.Los dB	Measured Level dBuV	Limit Line dBuV/m	Over limit dB	Remark	Pol/Phase
17.325	57.2	33.27	35.15	3.93	59.25	68.2	-14.75	Peak	Horizontal
17.325	40.96	33.27	35.15	3.93	43.01	54.0	-10.99	Average	Horizontal
17.325	54.69	33.27	35.15	3.93	56.74	68.2	-17.26	Peak	Vertical
17.325	39.81	33.27	35.15	3.93	41.86	54.0	-12.14	Average	Vertical

Notes:

- 1). Measuring frequencies from 9k~40GHz, No emission found between lowest internal used/generated frequency to 30MHz.
- 2). Radiated emissions measured in frequency range from 9k~40GHz were made with an instrument using Peak detector mode.
- 3). Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

5.5.9. Results for Band Edge Emissions

IEEE 802.11a						
Freq. MHz	Reading Level dBm	Antenna Gain dBi	Measured E dBuV/m	Limit dBuV/m	Margin dB	Remark
5650.000	-49.284	2.0	48.016	68.20	-20.184	Peak
5700.000	-44.427	2.0	52.873	105.20	-52.327	Peak
5720.000	-42.638	2.0	54.662	110.80	-56.138	Peak
5725.000	-34.553	2.0	62.747	122.20	-59.453	Peak
5720.917	-23.622	2.0	73.678	112.89	-39.212	Peak
5699.753	-26.253	2.0	71.047	105.02	-33.973	Peak
5850.000	-43.382	2.0	53.918	122.20	-68.282	Peak
5855.000	-45.023	2.0	52.277	110.80	-58.523	Peak
5875.000	-47.617	2.0	49.683	105.20	-55.517	Peak
5925.000	-48.521	2.0	48.779	68.20	-19.421	Peak
5857.760	-28.958	2.0	68.342	110.03	-41.688	Peak
5897.665	-36.008	2.0	61.292	88.43	-27.138	Peak

IEEE 802.11n-HT20						
Freq. MHz	Reading Level dBm	Antenna Gain dBi	Measured E dBuV/m	Limit dBuV/m	Margin dB	Remark
5650.000	-50.659	2.0	46.641	68.20	-21.559	Peak
5700.000	-40.194	2.0	57.106	105.20	-48.094	Peak
5720.000	-40.935	2.0	56.365	110.80	-54.435	Peak
5725.000	-34.830	2.0	62.470	122.20	-59.730	Peak
5706.826	-29.955	2.0	67.345	107.11	-39.765	Peak
5694.814	-28.890	2.0	68.410	101.36	-32.950	Peak
5850.000	-40.650	2.0	56.650	122.20	-65.550	Peak
5855.000	-45.381	2.0	51.919	110.80	-58.881	Peak
5875.000	-47.736	2.0	49.564	105.20	-55.636	Peak
5925.000	-49.114	2.0	48.186	68.20	-20.014	Peak
5856.529	-29.839	2.0	67.461	107.31	-39.849	Peak
5879.150	-29.533	2.0	67.767	102.13	-34.363	Peak

IEEE 802.11n-HT40

Freq. MHz	Reading Level dBm	Antenna Gain dBi	Measured E dBuV/m	Limit dBuV/m	Margin dB	Remark
5650.000	-50.392	2.0	46.908	68.20	-21.292	Peak
5700.000	-47.225	2.0	50.075	105.20	-55.125	Peak
5720.000	-40.045	2.0	57.255	110.80	-53.545	Peak
5725.000	-37.536	2.0	59.764	122.20	-62.436	Peak
5850.000	-47.631	2.0	49.669	122.20	-72.531	Peak
5855.000	-47.458	2.0	49.842	110.80	-60.958	Peak
5875.000	-49.238	2.0	48.062	105.20	-57.138	Peak
5925.000	-50.578	2.0	46.722	68.20	-21.478	Peak

IEEE 802.11ac VHT20

Freq. MHz	Reading Level dBm	Antenna Gain dBi	Measured E dBuV/m	Limit dBuV/m	Margin dB	Remark
5650.000	-48.276	2.0	49.024	68.20	-19.176	Peak
5700.000	-46.923	2.0	50.377	105.20	-54.823	Peak
5720.000	-42.573	2.0	54.727	110.80	-56.073	Peak
5725.000	-36.971	2.0	60.329	122.20	-61.871	Peak
5722.237	-25.217	2.0	72.083	115.90	-43.817	Peak
5717.848	-28.422	2.0	68.878	110.19	-41.312	Peak
5699.214	-31.822	2.0	65.478	104.61	-39.132	Peak
5850.000	-27.235	2.0	70.065	122.20	-52.135	Peak
5855.000	-45.354	2.0	51.946	110.80	-58.854	Peak
5875.000	-47.343	2.0	49.957	105.20	-55.243	Peak
5925.000	-47.524	2.0	49.776	68.20	-18.424	Peak
5863.625	-26.246	2.0	71.054	108.38	-37.326	Peak
5875.665	-27.346	2.0	69.954	104.70	-34.746	Peak

IEEE 802.11ac VHT40

Freq. MHz	Reading Level dBm	Antenna Gain dBi	Measured E dBuV/m	Limit dBuV/m	Margin dB	Remark
5650.000	-46.520	2.0	50.780	68.20	-17.420	Peak
5700.000	-47.318	2.0	49.982	105.20	-55.218	Peak
5720.000	-36.962	2.0	60.338	110.80	-50.462	Peak
5725.000	-36.178	2.0	61.122	122.2	-61.078	Peak
5850.000	-49.022	2.0	48.278	122.20	-73.922	Peak
5855.000	-47.290	2.0	50.010	110.80	-60.790	Peak
5875.000	-46.429	2.0	50.871	105.20	-54.329	Peak
5925.000	-50.201	2.0	47.099	68.20	-21.101	Peak


IEEE 802.11ac VHT80

Freq. MHz	Reading Level dBm	Antenna Gain dBi	Measured E dBuV/m	Limit dBuV/m	Margin dB	Remark
5650.000	-50.280	2.0	47.020	68.20	-21.180	Peak
5700.000	-44.477	2.0	52.823	105.20	-52.377	Peak
5720.000	-42.910	2.0	54.390	110.80	-56.410	Peak
5725.000	-41.232	2.0	56.068	122.20	-66.132	Peak
5850.000	-44.704	2.0	52.596	122.20	-69.604	Peak
5855.000	-47.911	2.0	49.389	110.80	-61.411	Peak
5875.000	-47.036	2.0	50.264	105.20	-54.936	Peak
5925.000	-50.193	2.0	47.107	68.20	-21.093	Peak


Note:

- 1). All modes have been tested and we only record the worst test result;
- 2). Measured E=Reading Level+Antenna Gain+95.2

Test plot of Band Edge and Restricted band Emissions

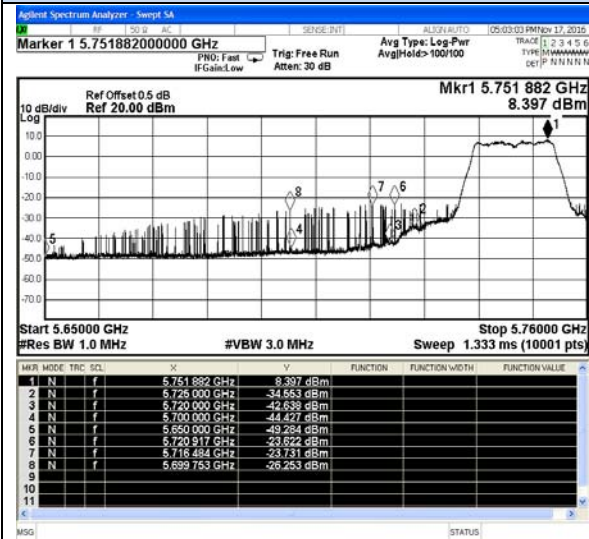


Next Peak
Next Pk Right
Next Pk Left
Marker Delta
Mkr--CF
Mkr--Ref Lvl
More
1 of 2

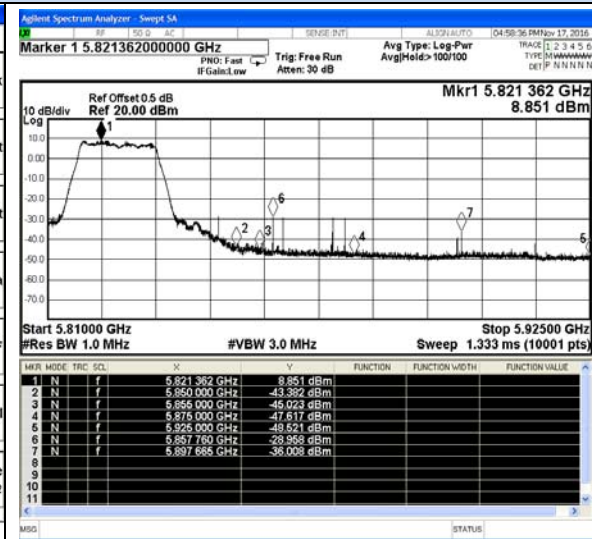


Next Peak
Next Pk Right
Next Pk Left
Marker Delta
Mkr--CF
Mkr--Ref Lvl
More
1 of 2

IEEE 802.11a-Low channel(Peak)

IEEE 802.11a-High channel(Peak)

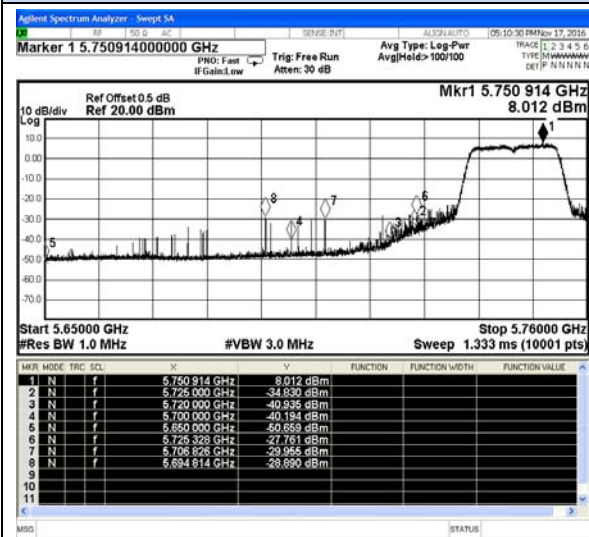


Next Peak
Next Pk Right
Next Pk Left
Marker Delta
Mkr--CF
Mkr--Ref Lvl
More
1 of 2

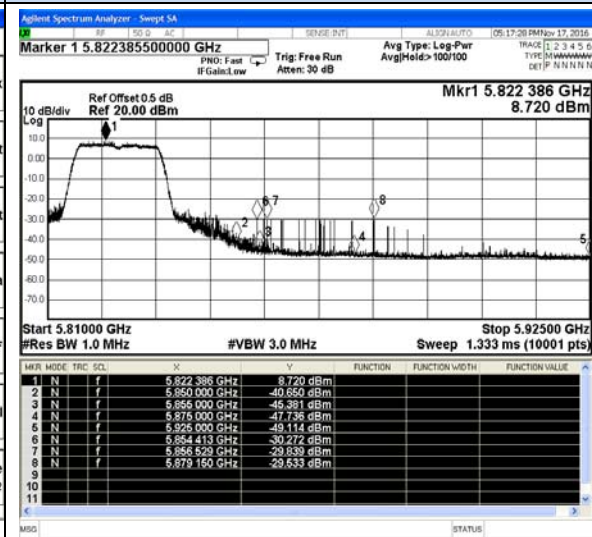


Next Peak
Next Pk Right
Next Pk Left
Marker Delta
Mkr--CF
Mkr--Ref Lvl
More
1 of 2

IEEE 802.11n-HT20-Low channel(Peak)

IEEE 802.11n-HT20-High channel(Peak)

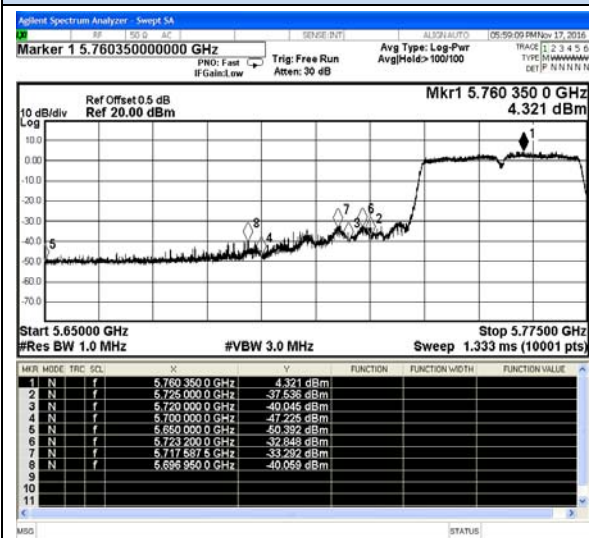

Next Peak
Next Pk Right
Next Pk Left
Marker Delta
Mkr--CF
Mkr--Ref Lvl
More
1 of 2


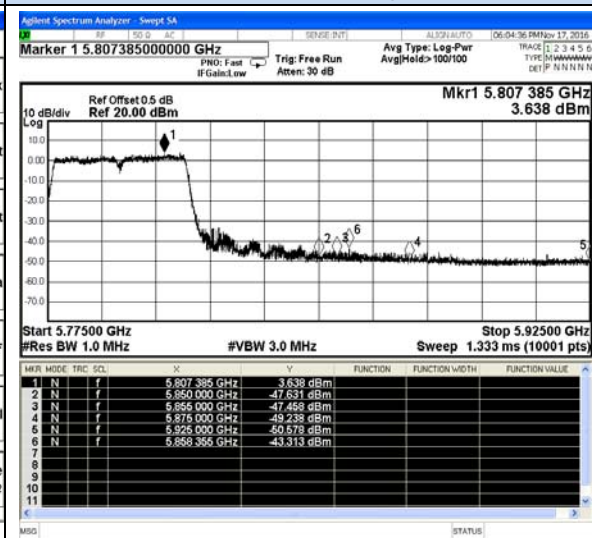


Next Peak
Next Pk Right
Next Pk Left
Marker Delta
Mkr--CF
Mkr--Ref Lvl
More
1 of 2

IEEE 802.11n-HT40-Low channel(Peak)



IEEE 802.11n-HT40-High channel(Peak)

Test plot of Band Edge and Restricted band Emissions

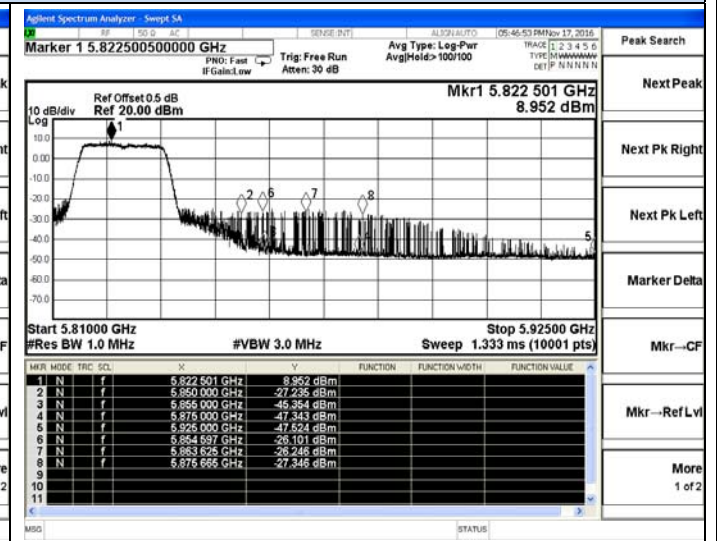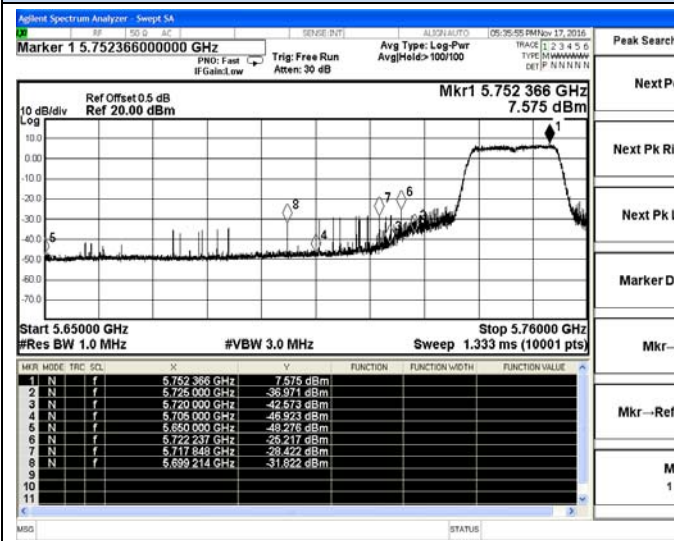



IEEE 802.11ac VHT20-Low channel(Peak)

IEEE 802.11ac VHT20-High channel(Peak)

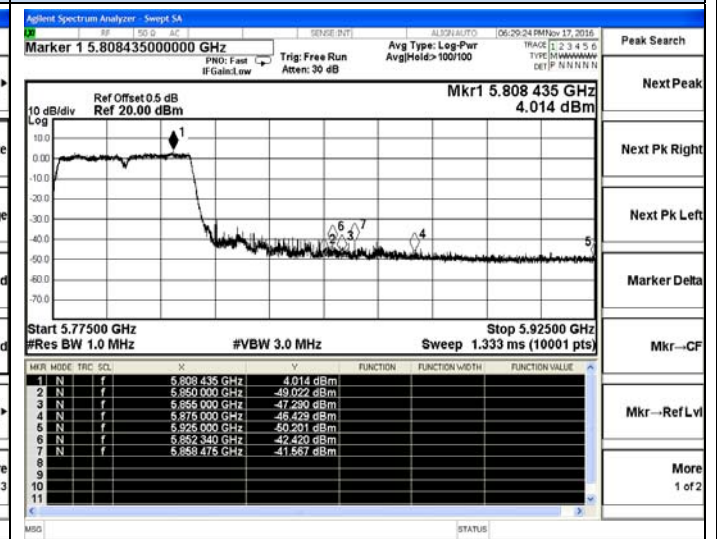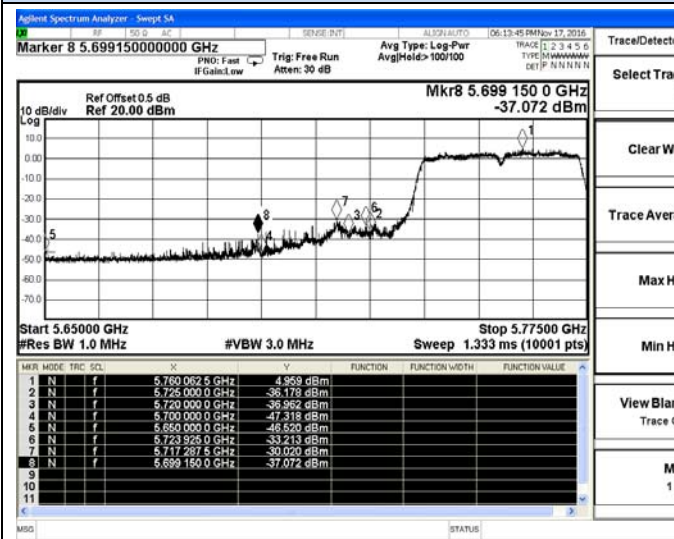

IEEE 802.11ac VHT40-Low channel(Peak)

IEEE 802.11ac VHT40-High channel(Peak)

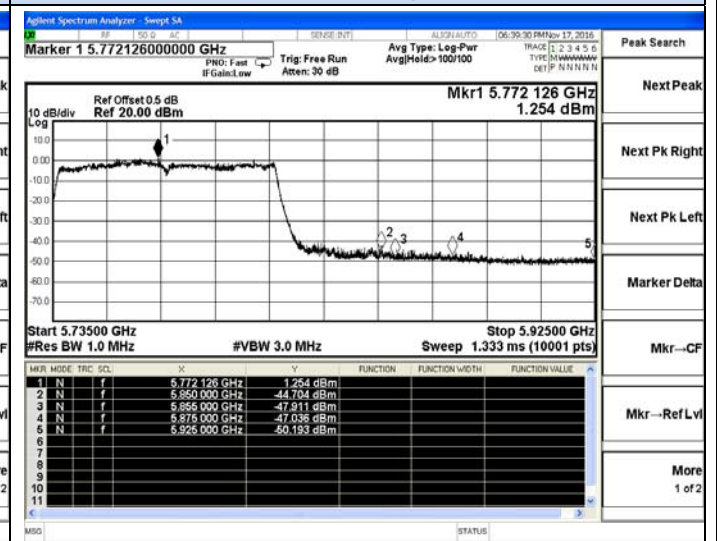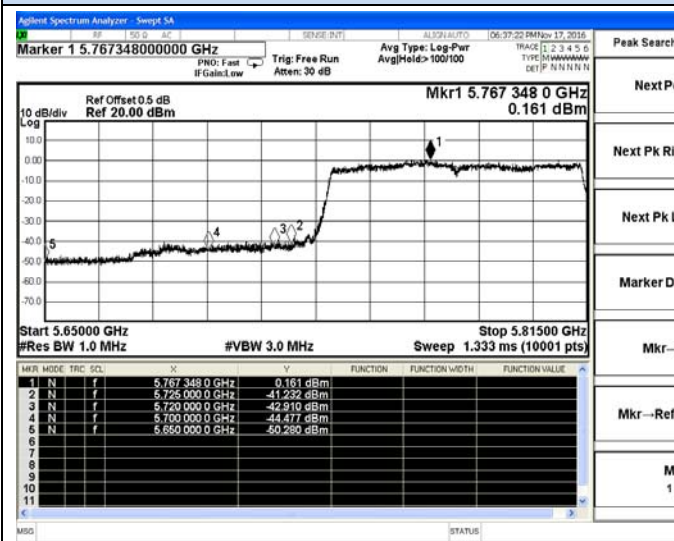

IEEE 802.11ac VHT80-Low channel(Peak)

IEEE 802.11ac VHT80-High channel(Peak)


5.6. Power line conducted emissions

5.6.1 Standard Applicable

According to §15.207 (a): For an intentional radiator which is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed 250 microvolts (The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz). The limits at specific frequency range is listed as follows:

Frequency Range (MHz)	Limits (dBµV)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56	56 to 46
0.50 to 5	56	46
5 to 30	60	50

5.6.2 Block Diagram of Test Setup

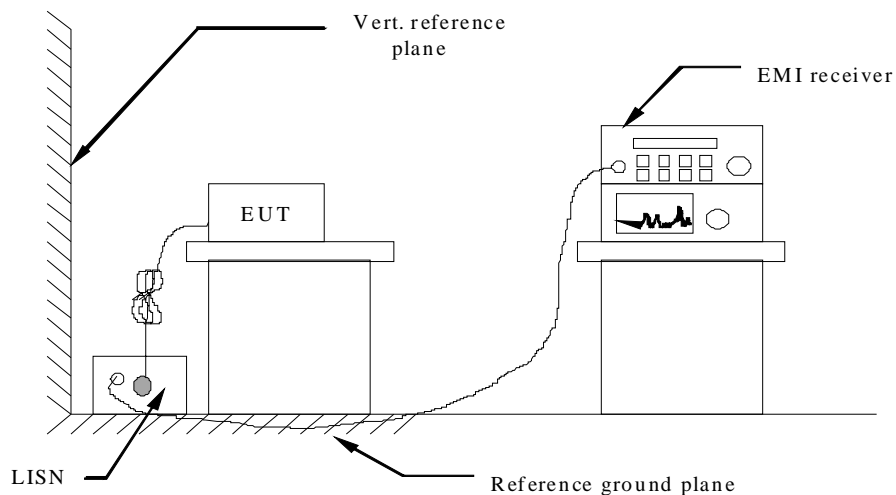


5.6.3 Test Results

PASS.

The test data please refer to following page.


Test result for IEEE 802.11a(AC 120V)

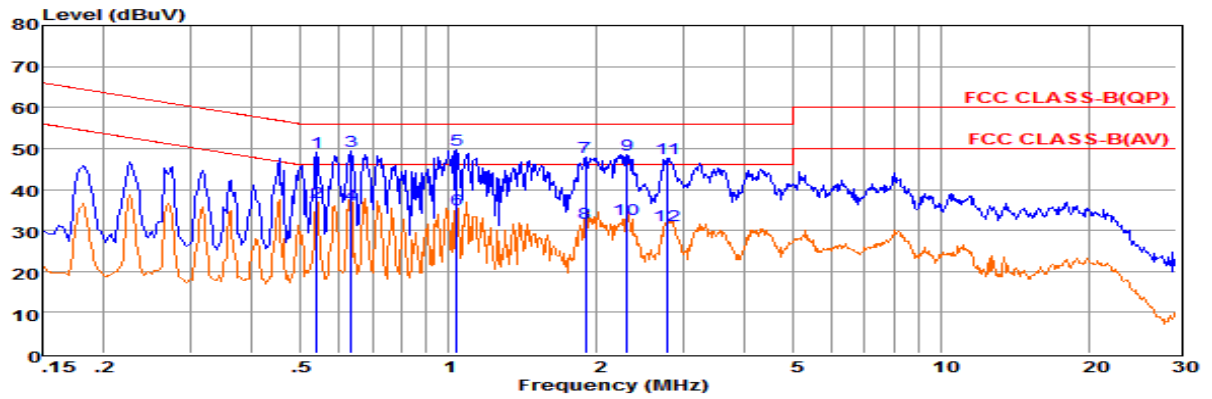

Env. Ins: 24*/56%
 Pol: NEUTRAL

	Freq	Reading	LISNFac	CabLos	Aux2Fac	Measured	Limit	Over	Remark
	MHz	dBuV	dB	dB	dB	dB	dBuV	dBuV	dB
1	0.54	29.56	9.62	0.04	10.00	49.22	56.00	-6.78	QP
2	0.54	17.22	9.62	0.04	10.00	36.88	46.00	-9.12	Average
3	0.63	29.83	9.63	0.04	10.00	49.50	56.00	-6.50	QP
4	0.63	16.69	9.63	0.04	10.00	36.36	46.00	-9.64	Average
5	1.04	29.93	9.63	0.05	10.00	49.61	56.00	-6.39	QP
6	1.04	15.29	9.63	0.05	10.00	34.97	46.00	-11.03	Average
7	1.90	28.14	9.63	0.05	10.00	47.82	56.00	-8.18	QP
8	1.90	12.14	9.63	0.05	10.00	31.82	46.00	-14.18	Average
9	2.31	28.85	9.63	0.05	10.00	48.53	56.00	-7.47	QP
10	2.31	12.98	9.63	0.05	10.00	32.66	46.00	-13.34	Average
11	2.78	27.94	9.64	0.05	10.00	47.63	56.00	-8.37	QP
12	2.78	11.59	9.64	0.05	10.00	31.28	46.00	-14.72	Average

Remarks: 1. Measured = Reading +Cable Loss +Aux2 Fac.
 2. The emission levels that are 20dB below the official limit are not reported.

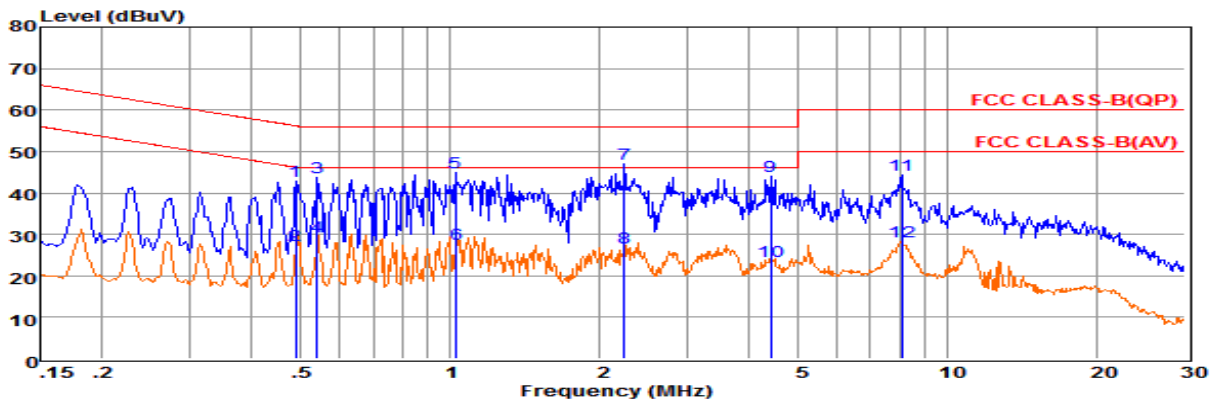


Env. Ins: 24*/56%
 Pol: LINE

	Freq	Reading	LISNFac	CabLos	Aux2Fac	Measured	Limit	Over	Remark
	MHz	dBuV	dB	dB	dB	dB	dBuV	dBuV	dB
1	0.49	23.03	9.62	0.04	10.00	42.69	56.19	-13.50	QP
2	0.49	7.79	9.62	0.04	10.00	27.45	46.18	-18.73	Average
3	0.54	23.94	9.62	0.04	10.00	43.60	56.00	-12.40	QP
4	0.54	9.73	9.62	0.04	10.00	29.39	46.00	-16.61	Average
5	1.03	25.32	9.63	0.05	10.00	45.00	56.00	-11.00	QP
6	1.03	8.11	9.63	0.05	10.00	27.79	46.00	-18.21	Average
7	2.24	27.21	9.64	0.05	10.00	46.90	56.00	-9.10	QP
8	2.24	6.96	9.64	0.05	10.00	26.65	46.00	-19.35	Average
9	4.41	24.25	9.65	0.06	10.00	43.96	56.00	-12.04	QP
10	4.41	3.70	9.65	0.06	10.00	23.41	46.00	-22.59	Average
11	8.11	24.61	9.68	0.07	10.00	44.36	60.00	-15.64	QP
12	8.11	8.51	9.68	0.07	10.00	28.26	50.00	-21.74	Average

Remarks: 1. Measured = Reading +Cable Loss +Aux2 Fac.
 2. The emission levels that are 20dB below the official limit are not reported.


Test result for IEEE 802.11a(AC 240V)

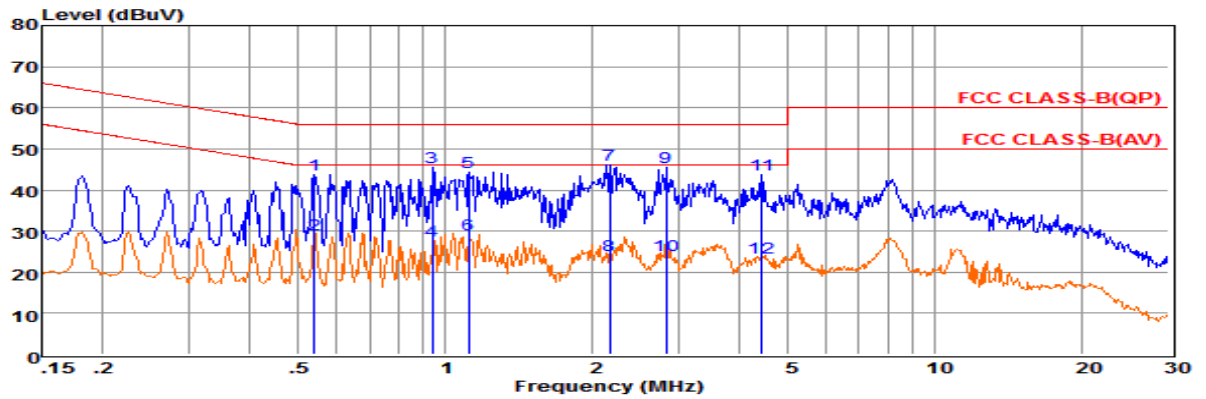

Env. Ins: 24*/56%
 Pol: LINE

	Freq	Reading	LISNFac	CabLos	Aux2Fac	Measured	Limit	Over	Remark
	MHz	dBuV	dB	dB	dB	dB	dBuV	dBuV	dB
1	0.54	24.05	9.62	0.04	10.00	43.71	56.00	-12.29	QP
2	0.54	9.59	9.62	0.04	10.00	29.25	46.00	-16.75	Average
3	0.94	25.76	9.63	0.05	10.00	45.44	56.00	-10.56	QP
4	0.94	7.97	9.63	0.05	10.00	27.65	46.00	-18.35	Average
5	1.12	24.60	9.63	0.05	10.00	44.28	56.00	-11.72	QP
6	1.12	9.45	9.63	0.05	10.00	29.13	46.00	-16.87	Average
7	2.17	26.53	9.64	0.05	10.00	46.22	56.00	-9.78	QP
8	2.17	4.39	9.64	0.05	10.00	24.08	46.00	-21.92	Average
9	2.82	25.79	9.64	0.06	10.00	45.49	56.00	-10.51	QP
10	2.82	4.42	9.64	0.06	10.00	24.12	46.00	-21.88	Average
11	4.43	23.96	9.65	0.06	10.00	43.67	56.00	-12.33	QP
12	4.43	3.83	9.65	0.06	10.00	23.54	46.00	-22.46	Average

Remarks: 1. Measured = Reading +Cable Loss +Aux2 Fac.
 2. The emission levels that are 20dB below the official limit are not reported.

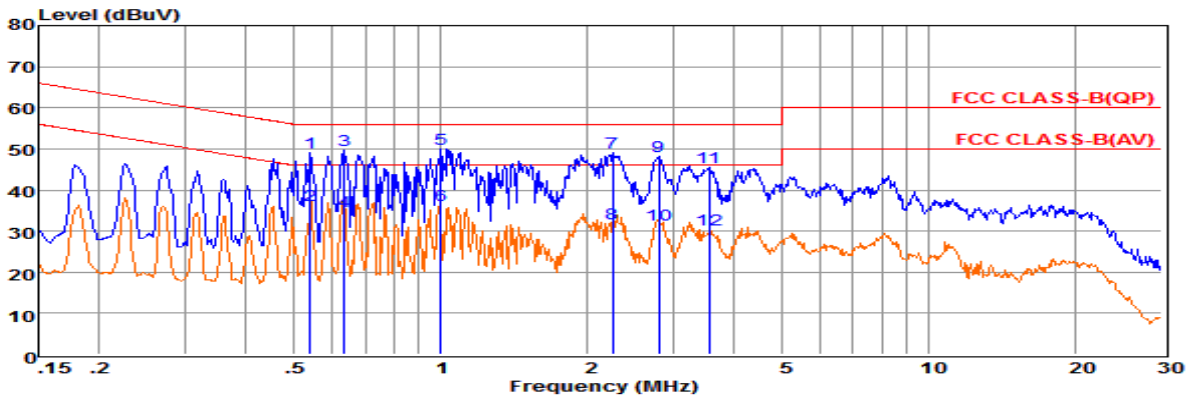

Env. Ins: 24*/56%
 Pol: NEUTRAL

	Freq	Reading	LISNFac	CabLos	Aux2Fac	Measured	Limit	Over	Remark
	MHz	dBuV	dB	dB	dB	dB	dBuV	dBuV	dB
1	0.54	29.32	9.62	0.04	10.00	48.98	56.00	-7.02	QP
2	0.54	16.69	9.62	0.04	10.00	36.35	46.00	-9.65	Average
3	0.63	29.93	9.63	0.04	10.00	49.60	56.00	-6.40	QP
4	0.63	15.03	9.63	0.04	10.00	34.70	46.00	-11.30	Average
5	1.00	30.31	9.63	0.05	10.00	49.99	56.00	-6.01	QP
6	1.00	16.47	9.63	0.05	10.00	36.15	46.00	-9.85	Average
7	2.25	29.40	9.63	0.05	10.00	49.08	56.00	-6.92	QP
8	2.25	12.25	9.63	0.05	10.00	31.93	46.00	-14.07	Average
9	2.79	28.58	9.64	0.05	10.00	48.27	56.00	-7.73	QP
10	2.80	11.70	9.64	0.05	10.00	31.39	46.00	-14.61	Average
11	3.55	25.72	9.65	0.06	10.00	45.43	56.00	-10.57	QP
12	3.55	10.53	9.65	0.06	10.00	30.24	46.00	-15.76	Average

Remarks: 1. Measured = Reading +Cable Loss +Aux2 Fac.
 2. The emission levels that are 20dB below the official limit are not reported.

***Note: Pre-scan all mode and recorded the worst case results in this report (IEEE 802.11a).

5.7. Antenna Requirements

5.7.1 Standard Applicable

According to antenna requirement of §15.203.

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be re-placed by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of Sections 15.211, 15.213, 15.217, 15.219, or 15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with Section 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this Part are not exceeded.

And according to §15.247(4)(1), system operating in the 2400-2483.5MHz bands that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum peak output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.

5.7.2 Antenna Connected Construction

5.7.2.1. Standard Applicable

According to § 15.203 & RSS-Gen, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

5.7.2.2. Antenna Connector Construction

The directional gains of antenna used for transmitting is 2.0dBi, and the antenna is an R-SMA antenna connect to PCB board and no consideration of replacement. Please see EUT photo for details.

5.7.2.3. Results: Compliance.

Measurement

The antenna gain of the complete system is calculated by the difference of radiated power in EIRP and the conducted power of the module.

Conducted power refers ANSI C63.10:2013 Output power test procedure for UNII devices.

Radiated power refers to ANSI C63.10:2013 Radiated emissions tests.

Measurement parameters

Measurement parameter	
Detector:	Peak
Sweep Time:	Auto
Resolution bandwidth:	1MHz
Video bandwidth:	3MHz
Trace-Mode:	Max hold

Limits

FCC	IC
Antenna Gain	
6 dBi	

Note: The antenna gain of the complete system is calculated by the difference of radiated power in EIRP and the conducted power of the module. For WLAN devices, the OFDM (IEEE 802.11a) mode is used;

Tnom	Vnom	Lowest Channel 5745 MHz	Middle Channel 5785 MHz	Highest Channel 5825 MHz
Conducted power [dBm] Measured with OFDM modulation		6.89	6.74	6.92
Radiated power [dBm] Measured with OFDM modulation		8.66	8.60	8.73
Gain [dBi] Calculated		1.77	1.86	1.81
Measurement uncertainty			± 1.6 dB (cond.) / ± 3.8 dB (rad.)	

Result: -/-

6. LIST OF MEASURING EQUIPMENTS

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Cal Date	Due Date
EMC Receiver	R&S	ESCS 30	100174	9kHz – 2.75GHz	June 18, 2016	June 17, 2017
Signal analyzer	Agilent	E4448A(External mixers to 40GHz)	US44300469	9kHz~40GHz	July 16, 2016	July 15, 2017
Signal analyzer	Agilent	N9020A	MY50510140	9kHz~26.5GHz	October 27, 2016	October 27, 2017
LISN	MESS Tec	NNB-2/16Z	99079	9KHz-30MHz	June 18, 2016	June 17, 2017
LISN (Support Unit)	EMCO	3819/2NM	9703-1839	9KHz-30MHz	June 18, 2016	June 17, 2017
RF Cable-CON	UTIFLEX	3102-26886-4	CB049	9KHz-30MHz	June 18, 2016	June 17, 2017
ISN	SCHAFFNER	ISN ST08	21653	9KHz-30MHz	June 18, 2016	June 17, 2017
3m Semi Anechoic Chamber	SIDT FRANKONIA	SAC-3M	03CH03-HY	30M-18GHz 3m	June 18, 2016	June 17, 2017
Amplifier	SCHAFFNER	COA9231A	18667	9kHz-2GHz	June 18, 2016	June 17, 2017
Amplifier	Agilent	8449B	3008A02120	1GHz-26.5GHz	July 16, 2016	July 15, 2017
Amplifier	MITEQ	AMF-6F-260400	9121372	26.5GHz-40GHz	July 16, 2016	July 15, 2017
Loop Antenna	R&S	HFH2-Z2	860004/001	9k-30MHz	June 18, 2016	June 17, 2017
By-log Antenna	SCHWARZBECK	VULB9163	9163-470	30MHz-1GHz	June 10, 2016	June 09, 2017
Horn Antenna	EMCO	3115	6741	1GHz-18GHz	June 10, 2016	June 09, 2017
Horn Antenna	SCHWARZBECK	BBHA9170	BBHA9170154	15GHz-40GHz	June 10, 2016	June 09, 2017
RF Cable-R03m	Jye Bao	RG142	CB021	30MHz-1GHz	June 18, 2016	June 17, 2017
RF Cable-HIGH	SUHNER	SUCOFLEX 106	03CH03-HY	1GHz-40GHz	June 18, 2016	June 17, 2017
Power Meter	R&S	NRVS	100444	DC-40GHz	June 18, 2016	June 17, 2017
Power Sensor	R&S	NRV-Z51	100458	DC-30GHz	June 18, 2016	June 17, 2017
Power Sensor	R&S	NRV-Z32	10057	30MHz-6GHz	June 18, 2016	June 17, 2017
AC Power Source	HPC	HPA-500E	HPA-9100024	AC 0~300V	June 18, 2016	June 17, 2017
DC power Source	GW	GPC-6030D	C671845	DC 1V-60V	June 18, 2016	June 17, 2017
Temp. and Humidity	Giant Force	GTH-225-20-S	MAB0103-00	N/A	June 18, 2016	June 17, 2017
RF CABLE-1m	JYE Bao	RG142	CB034-1m	20MHz-7GHz	June 18, 2016	June 17, 2017
RF CABLE-2m	JYE Bao	RG142	CBJ35-2m	20MHz-1GHz	June 18, 2016	June 17, 2017

Note: All equipment through GRGT EST calibration

7. TEST SETUP PHOTOGRAPHS OF EUT

Please refer to separated files for Test Setup Photos of the EUT.

8. EXTERIOR PHOTOGRAPHS OF THE EUT

Please refer to separated files for External Photos of the EUT.

9. INTERIOR PHOTOGRAPHS OF THE EUT

Please refer to separated files for Internal Photos of the EUT.

-----THE END OF REPORT-----