

# **FCC 47 CFR PART 15 SUBPART C**

for

**Prodrone byrd**

**Model: MGP01-A**

**Brand: ProDrone**

**Test Report Number: A151222681F**

Issued for

**Prodrone Technology(Shenzhen) Co.,Ltd  
8th Floor, Beike Building, South High Technology Park, Nanshan District,  
Shenzhen**

Issued by: Shenzhen CTL Electron Technology Co.,Ltd.

Issued Date: December 18, 2015

**Note:**

Revision History

Rev.	Issue Data	Revisions	Effect Page	Revised By
00	December 18, 2015	Initial Issue	ALL	Andy Zhang

**TABLE OF CONTENTS**

**1 TEST CERTIFICATION..... 4**

**2 TEST RESULT SUMMARY..... 5**

**3 EUT DESCRIPTION ..... 6**

**4 TEST METHODOLOGY ..... 7**

    4.1. DESCRIPTION OF TEST MODES ..... 7

**5 SETUP OF EQUIPMENT UNDER TEST..... 8**

    5.1. DESCRIPTION OF SUPPORT UNITS..... 8

    5.2. CONFIGURATION OF SYSTEM UNDER TEST ..... 8

**6 FACILITIES AND ACCREDITATIONS ..... 9**

    6.1. FACILITIES..... 9

    6.2. ACCREDITATIONS ..... 9

    6.3. MEASUREMENT UNCERTAINTY..... 9

**7 FCC PART 15.247 REQUIREMENTS..... 10**

    7.1. POWER LINE CONDUCTED EMISSIONS MEASUREMENT ..... 10

    7.2. SPURIOUS EMISSIONS MEASUREMENT..... 15

    7.3. 6dB BANDWIDTH MEASUREMENT ..... 35

    7.4. PEAK OUTPUT POWER ..... 40

    7.5. ANTENNA GAIN ..... 43

    7.6. BAND EDGES MEASUREMENT..... 45

    7.7. PEAK POWER SPECTRAL DENSITY MEASUREMENT..... 51

# 1 TEST CERTIFICATION

<b>Product</b>	Prodrone byrd
<b>Model</b>	MGP01-A
<b>Brand</b>	ProDrone
<b>Tested</b>	December 15~ December 18, 2015
<b>Applicant</b>	<b>Prodrone Technology(Shenzhen) Co.,Ltd</b> 8th Floor, Beike Building, South High Technology Park, Nanshan District, Shenzhen
<b>Manufacturer</b>	<b>Prodrone Technology(Shenzhen) Co.,Ltd</b> 8th Floor, Beike Building, South High Technology Park, Nanshan District, Shenzhen

<b>APPLICABLE STANDARDS</b>			
<b>Standard</b>	<b>Test Type</b>	<b>Standard</b>	<b>Test Type</b>
15.207(a)	Power Line Conducted Emissions	15.247(d) 15.209(a)	<ul style="list-style-type: none"> <li>● Spurious Emissions</li> <li>● Conducted Measurement</li> <li>● Radiated Emissions</li> </ul>
15.247(a)(2)	6dB Bandwidth Measurement	15.247(b)(3) 15.247(b)(4)	Peak Power Measurement
15.247(d)	Band Edges Measurement	15.247(e)	Peak Power Spectral Density

## We hereby certify that:

The above equipment was tested by Dongguan Dongdian Testing Service Co.,Ltd. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in **ANSI C63.10: 2013** and the energy emitted by the sample EUT tested as described in this report is in compliance with the requirements of FCC Rules Part 15.207, 15.209, 15.247.

The test results of this report relate only to the tested sample EUT identified in this report.

**Approved by:**



**Reviewed by:**



## 2 TEST RESULT SUMMARY

APPLICABLE STANDARDS			
Standard	Test Type	Result	Remark
15.247(a)(2)	6dB Bandwidth Measurement	Pass	Meet the requirement of limit.
15.247(b)(3) 15.247(b)(4)	Peak Power Measurement	Pass	Meet the requirement of limit.
15.247(d)	Band Edges Measurement	Pass	Meet the requirement of limit.
15.247(e)	Peak Power Spectral Density	Pass	Meet the requirement of limit.
15.247(d) 15.209(a)	<ul style="list-style-type: none"> <li>● Spurious Emissions</li> <li>● Conducted Measurement</li> <li>● Radiated Emissions</li> </ul>	Pass	Meet the requirement of limit.
15.207(a)	Power line Conducted Emissions	Pass	Meet the requirement of limit.

Note: 1. The statements of test result on the above are decided by the request of test standard only; the measurement uncertainties are not factored into this compliance determination.  
2. The information of measurement uncertainty is available upon the customer's request.

### 3 EUT DESCRIPTION

<b>Product</b>	Prodrone byrd
<b>Model</b>	MGP01-A
<b>Brand</b>	ProDrone
<b>Model Discrepancy</b>	N/A
<b>Identify Number</b>	
<b>Received Date</b>	December 15, 2015
<b>Power Supply</b>	Internal Li-ion Battery 14.2V
<b>Frequency Range</b>	2405.5-2438 MHz
<b>Transmit Power</b>	9.99dBm (Antenna 1) 9.59dBm (Antenna 2)
<b>Modulation Technique</b>	GFSK for 1Mbps
<b>Number of Channels</b>	16 Channels
<b>Antenna Specification</b>	PCB antenna with 2.0dBi gain (Max) (Antenna 1) CHIP antenna with 3.0dBi gain (Max) (Antenna 2)
<b>Temperature Range</b>	
<b>Hardware Version</b>	
<b>Software Version</b>	

**Note:** 1. The sample selected for test was engineering sample that approximated to production product and was provided by manufacturer.

2. This submittal(s) (test report) is intended for FCC ID: 2AGKH-PD-BYRD-0102 filing to comply with Section 15.207, 15.209 and 15.247 of the FCC Part 15, Subpart C Rules.

## 4 TEST METHODOLOGY

### 4.1. DESCRIPTION OF TEST MODES

The EUT has been tested under operating condition.

Software used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

Test Item	Test mode	Worse mode
Conducted Emission	<b>Mode 1:</b> Charge	<input checked="" type="checkbox"/>
Radiated Emission	<b>Mode 1:</b> TX	<input checked="" type="checkbox"/>

After verification, all tests were carried out with the worst case test modes as shown below except radiated spurious emission below 1GHz, which worst case was in normal link mode only.

## 5 SETUP OF EQUIPMENT UNDER TEST

### 5.1. DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

No.	Equipment	Model No.	Serial No.	FCC	Brand	Data Cable	Power Cord
1							

**Note:**

Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

### 5.2. CONFIGURATION OF SYSTEM UNDER TEST

See test photographs attached in Appendix II for the actual connections between EUT and support equipment.



## 6 FACILITIES AND ACCREDITATIONS

### 6.1. FACILITIES

All measurement facilities used to collect the measurement data are located at Dongguan Dongdian Testing Service Co.,Ltd.

The sites are constructed in conformance with the requirements of ANSI C63.10, ANSI C63.7 and CISPR Publication 22. All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

### 6.2. ACCREDITATIONS

The test facility is recognized, certified, or accredited by the following organizations:

#### IC Registration No.: 10288A-1

The 3m alternate test site of Dongguan Dongdian Testing Service Co.,Ltd EMC Laboratory has been registered by Certification and Engineer Bureau of Industry Canada for the performance of with Registration No.: 10288A-1 on May, 2012.

#### FCC-Registration No.: 270092

Dongguan Dongdian Testing Service Co.,Ltd EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 270092, Mar, 2015.

### 6.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Parameter	Uncertainty
Radiated Emission, 30 to 200 MHz Test Site : 966(2)	+/-3.6880dB
Radiated Emission, 200 to 1000 MHz Test Site : 966(2)	+/-3.6695dB
Radiated Emission, 1 to 8 GHz	+/-5.1782dB
Radiated Emission, 8 to 18 GHz	+/-5.2173dB
Conducted Emissions	+/-3.6836dB
Band Width	178kHz
Peak Output Power MU	+/-1.906dB
Band Edge MU	+/-0.182dB
Channel Separation MU	416.178Hz
Duty Cycle MU	0.054ms
Frequency Stability MU	226Hz

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

The measured result is above (below) the specification limit by a margin less than the measurement uncertainty; it is therefore not possible to state compliance based on the 95% level of confidence. However, the result indicates that compliance (non-compliance) is more probable than non-compliance) with the specification limit.

## 7 FCC PART 15.247 REQUIREMENTS

### 7.1. POWER LINE CONDUCTED EMISSIONS MEASUREMENT

#### 7.1.1. LIMITS OF CONDUCTED EMISSIONS MEASUREMENT

According to §15.207(a), except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50  $\mu$ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

Frequency Range (MHz)	Limits (dB $\mu$ V)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56*	56 to 46*
0.50 to 5	56	46
5 to 30	60	50

**NOTE:**

- (1) The lower limit shall apply at the transition frequencies.
- (2) The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.
- (3) All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

#### 7.1.2. TEST INSTRUMENTS


Conducted Emission Test Site					
Name of Equipment	Manufacturer	Model Number	Serial Number	Last Calibration	Cal. Interval
Artificial Mains	Rohde&Schwarz	ENV216	101109	2015/10/22	1 years
Artificial Mains	Rohde&Schwarz	ESH3-Z5	100309	2015/10/22	1 years
EMI Test Receiver	Rohde&Schwarz	ESU8	100316	2015/10/22	1 years
Pulse Limiter	Rohde&Schwarz	ESH3-Z2	101242	2015/10/22	1 years
EMI TEST Software	Audix	E3	6.111111	N/A	N/A

- NOTE:** 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.  
2. N.C.R = No Calibration Request.

**7.1.3. TEST PROCEDURES** (please refer to measurement standard)

- The EUT and Support equipment, if needed, was placed on a non-conducted table, which is 0.8m above the ground plane and 0.4m away from the conducted wall.
- The test equipment EUT installed received AC main power, through a Line Impedance Stabilization Network (LISN), which supplied power source and was grounded to the ground plane. All support equipment power received from a second LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- The EUT test program was started. Emissions were measured on each current carrying line of the EUT using an EMI Test Receiver connected to the LISN powering the EUT.
- The frequency range from 150 kHz to 30 MHz was searched. The test data of the worst-case condition(s) was recorded. Emission levels under limit 20dB were not recorded.

**7.1.4. TEST SETUP**

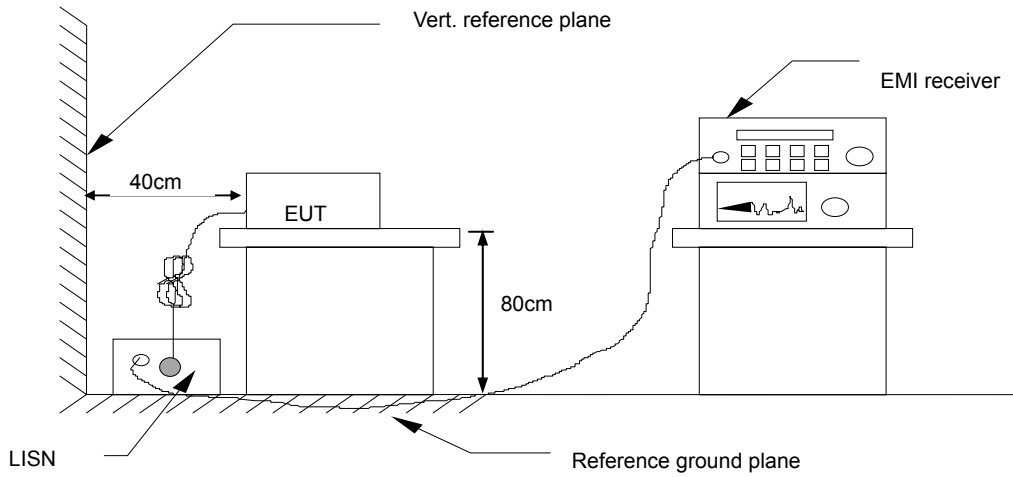

For the actual test configuration, please refer to the related item - Photographs of the Test Configuration.

**7.1.5. DATA SAMPLE**


Frequency (MHz)	QuasiPeak Reading (dBuV)	Average Reading (dBuV)	Correction Factor (dB)	QuasiPeak Result (dBuV)	Average Result (dBuV)	QuasiPeak Limit (dBuV)	Average Limit (dBuV)	QuasiPeak Margin (dB)	Average Margin (dB)	Remark (Pass/Fail)
X.XXXX	34.99	19.33	10.15	45.14	29.48	65.99	56.00	-20.85	-26.52	Pass

- Factor = Insertion loss of LISN + Cable Loss
- Result = Quasi-peak Reading/ Average Reading + Factor
- Limit = Limit stated in standard
- Margin = Result (dBuV) – Limit (dBuV)

### 7.1.6. TEST RESULTS

#### Test Data

<b>Model No.</b>	MGP01-A	<b>RBW,VBW</b>	9 kHz
<b>Environmental Conditions</b>	26°C, 60% RH	<b>Test Mode</b>	Mode 1
<b>Tested by</b>	Ad Gan	<b>Line</b>	L1
<b>Test Date</b>	December 16, 2015		

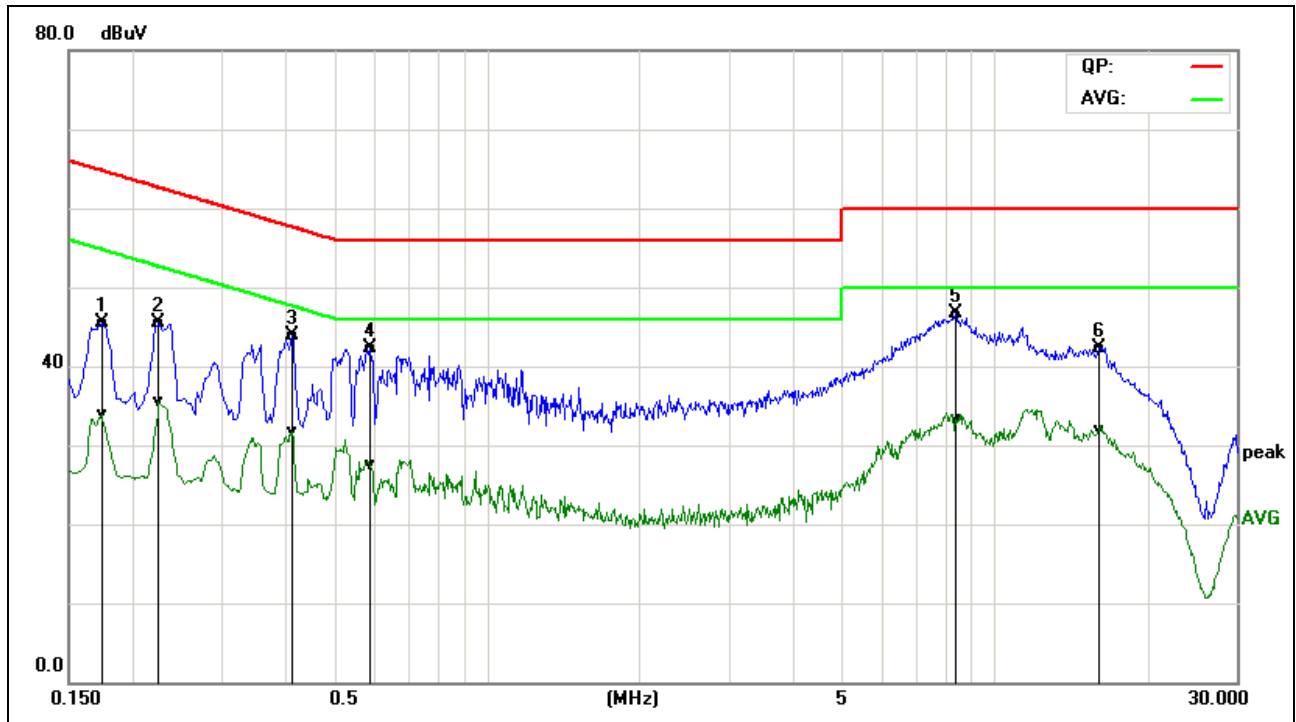


Frequency (MHz)	QuasiPeak Reading (dBuV)	Average Reading (dBuV)	Correction Factor (dB)	QuasiPeak Result (dBuV)	Average Result (dBuV)	QuasiPeak Limit (dBuV)	Average Limit (dBuV)	QuasiPeak Margin (dB)	Average Margin (dB)	Remark (Pass/Fail)
0.1740	35.87	24.36	9.63	45.50	33.99	64.76	54.77	-19.26	-20.78	Pass
0.2260	35.88	25.75	9.69	45.57	35.44	62.59	52.60	-17.02	-17.16	Pass
0.4140	34.22	21.95	9.68	43.90	31.63	57.57	47.57	-13.67	-15.94	Pass
0.5899	32.50	17.83	9.72	42.22	27.55	56.00	46.00	-13.78	-18.45	Pass
8.3740	36.77	23.55	9.83	46.60	33.38	60.00	50.00	-13.40	-16.62	Pass
16.1220	32.48	21.92	9.89	42.37	31.81	60.00	50.00	-17.63	-18.19	Pass

**Note:**

1. Measuring frequencies from 0.15 MHz to 30MHz.
2. The emissions measured in frequency range from 0.15 MHz to 30MHz were made with an instrument using Peak detector, Quasi-peak detector and average detector.
3. "---" denotes the emission level was or more than 2dB below the Average limit.
4. The IF bandwidth of SPA between 0.15MHz to 30MHz was 10kHz; the IF bandwidth of Test Receiver between 0.15MHz to 30MHz was 9kHz;
5. L1= Line One (Live Line)

<b>Model No.</b>	MGP01-A	<b>RBW,VBW</b>	9 kHz
<b>Environmental Conditions</b>	26°C, 60% RH	<b>Test Mode</b>	Mode 1
<b>Tested by</b>	Ad Gan	<b>Line</b>	L2
<b>Test Date</b>	December 16, 2015		

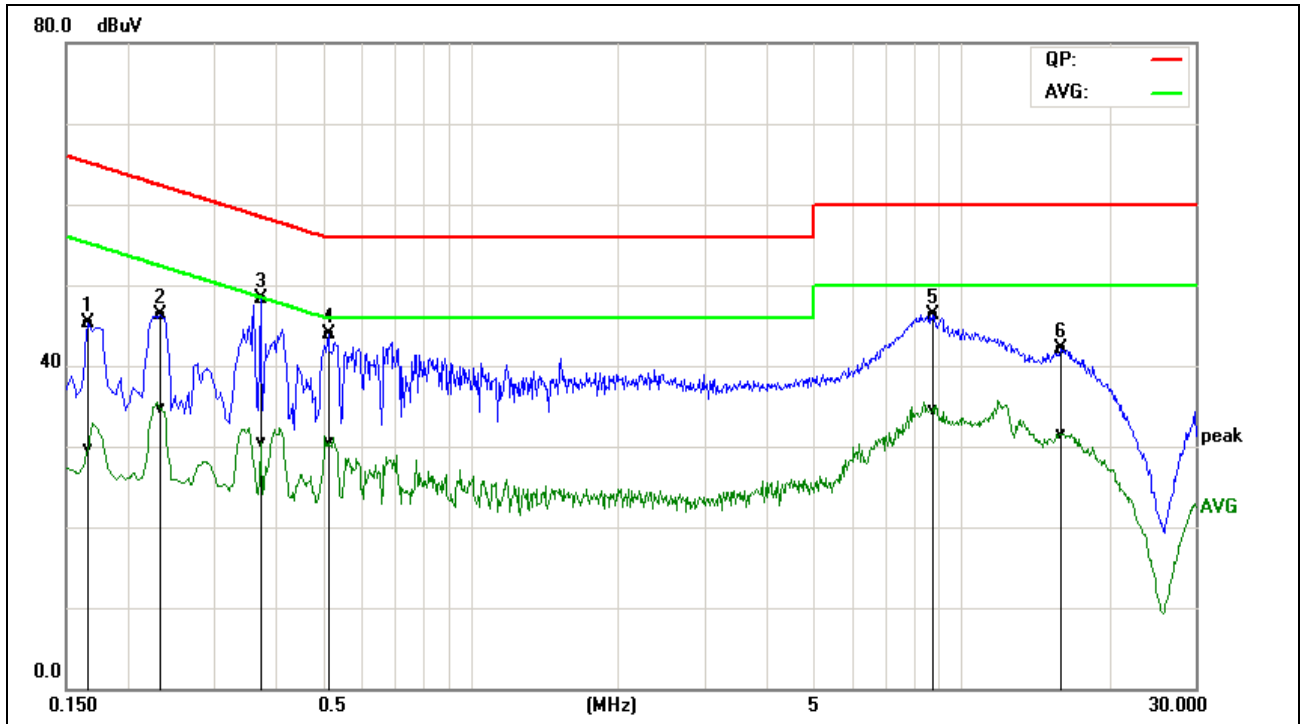

Frequency (MHz)	QuasiPeak Reading (dBuV)	Average Reading (dBuV)	Correction Factor (dB)	QuasiPeak Result (dBuV)	Average Result (dBuV)	QuasiPeak Limit (dBuV)	Average Limit (dBuV)	QuasiPeak Margin (dB)	Average Margin (dB)	Remark (Pass/Fail)
0.1660	35.56	19.89	9.78	45.34	29.67	65.15	55.16	-19.81	-25.49	Pass
0.2340	36.53	24.91	9.78	46.31	34.69	62.30	52.31	-15.99	-17.62	Pass
0.3740	38.52	20.76	9.72	48.24	30.48	58.41	48.41	-10.17	-17.93	Pass
0.5140	34.30	20.77	9.68	43.98	30.45	56.00	46.00	-12.02	-15.55	Pass
8.7540	36.42	24.73	9.83	46.25	34.56	60.00	50.00	-13.75	-15.44	Pass
16.0060	32.42	21.89	9.71	42.13	31.60	60.00	50.00	-17.87	-18.40	Pass

**Note:**

1. Measuring frequencies from 0.15 MHz to 30MHz.
2. The emissions measured in frequency range from 0.15 MHz to 30MHz were made with an instrument using Peak detector, Quasi-peak detector and average detector.
3. “---” denotes the emission level was or more than 2dB below the Average limit.
4. The IF bandwidth of SPA between 0.15MHz to 30MHz was 10kHz; the IF bandwidth of Test Receiver between 0.15MHz to 30MHz was 9kHz;
5. L2= Line Two (Neutral Line)

## 7.2. SPURIOUS EMISSIONS MEASUREMENT

### 7.2.1. LIMITS OF CONDUCTED EMISSIONS MEASUREMENT

According to §15.247(d), in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in 15.209(a) (see Section 15.205(c)).

### 7.2.2. TEST INSTRUMENTS

Name of Equipment	Manufacturer	Model	Serial Number	Last Calibration	Due Calibration
PXA Signal Analyzer	Agilent	N9030A	JTT-E003	2015/04/22	2016/04/21

### 7.2.3. TEST PROCEDURE (please refer to measurement standard)

Conducted RF measurements of the transmitter output were made to confirm that the EUT antenna port conducted emissions meet the specified limit and to identify any spurious signals that require further investigation or measurements on the radiated emissions site.



The transmitter output is connected to the spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 300 kHz.

Measurements are made over the 10MHz to 26.5GHz range with the transmitter set to the lowest, middle, and highest channels.


### 7.2.4. TEST RESULTS



No emission found between lowest internal used/generated frequency to 30MHz ,  
it is only recorded 30MHz to 26GHz

#### Test Plot Antenna1

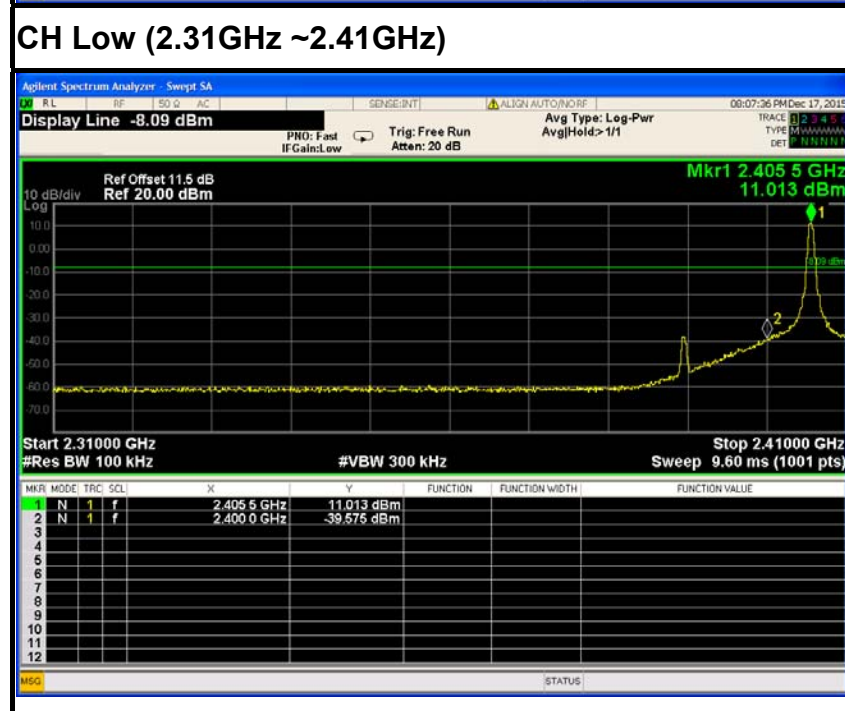
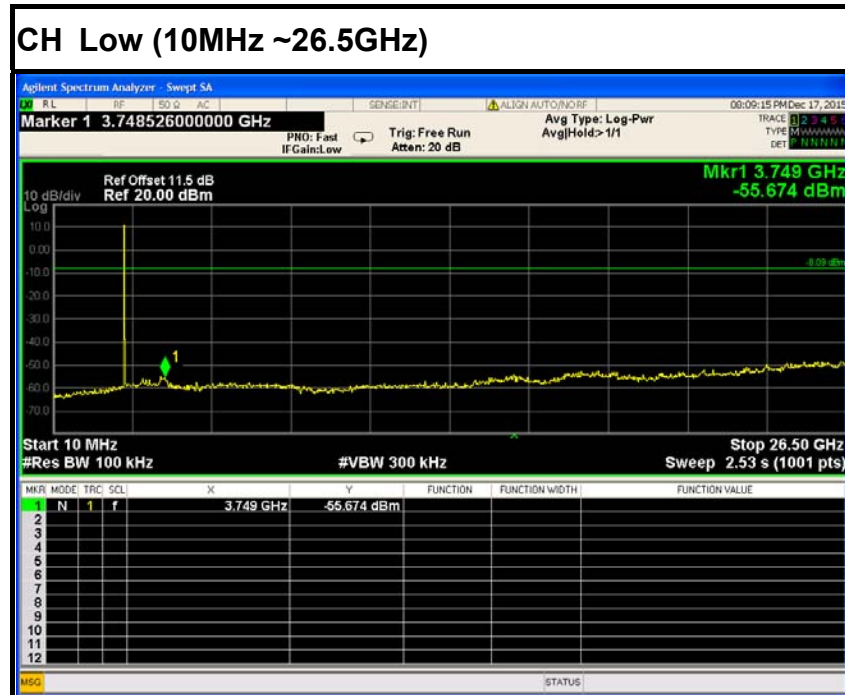






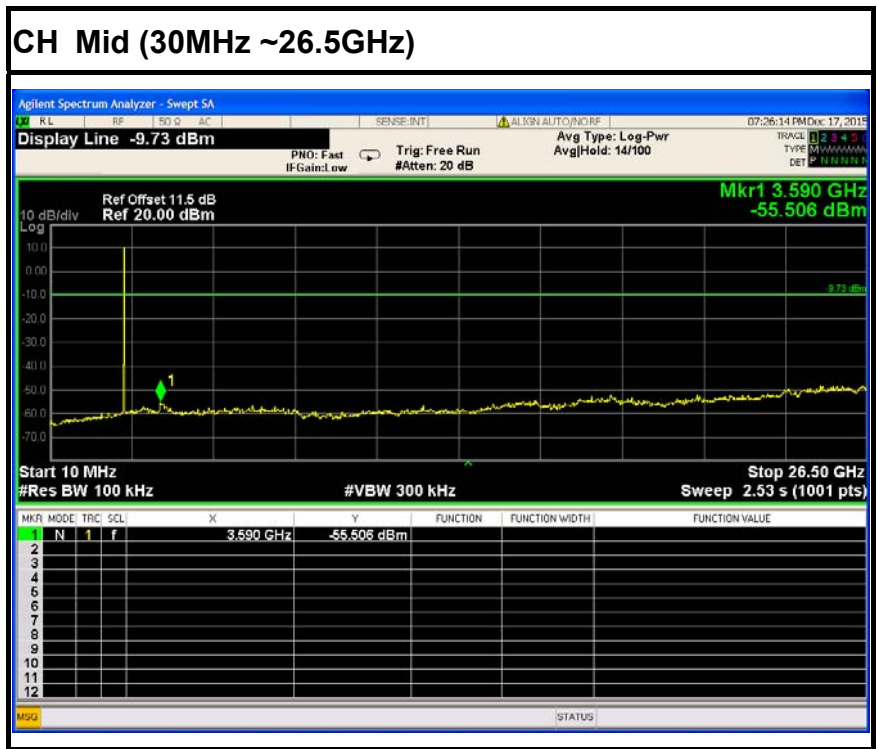


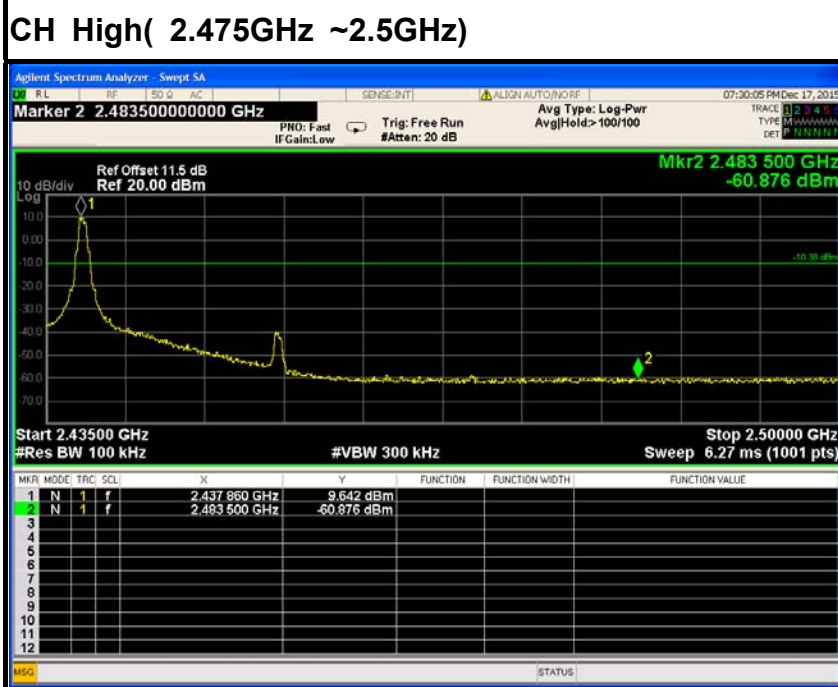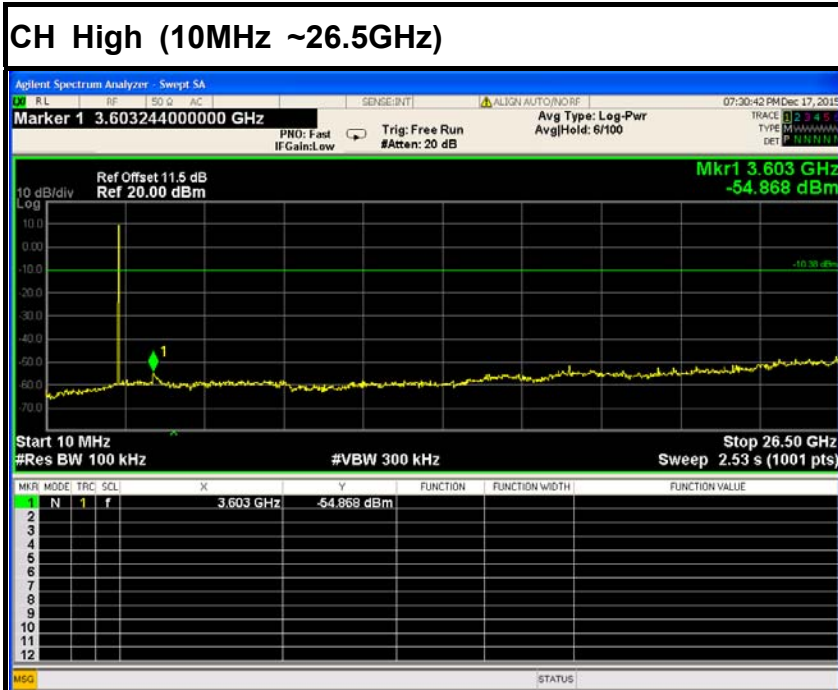

Antenna 2

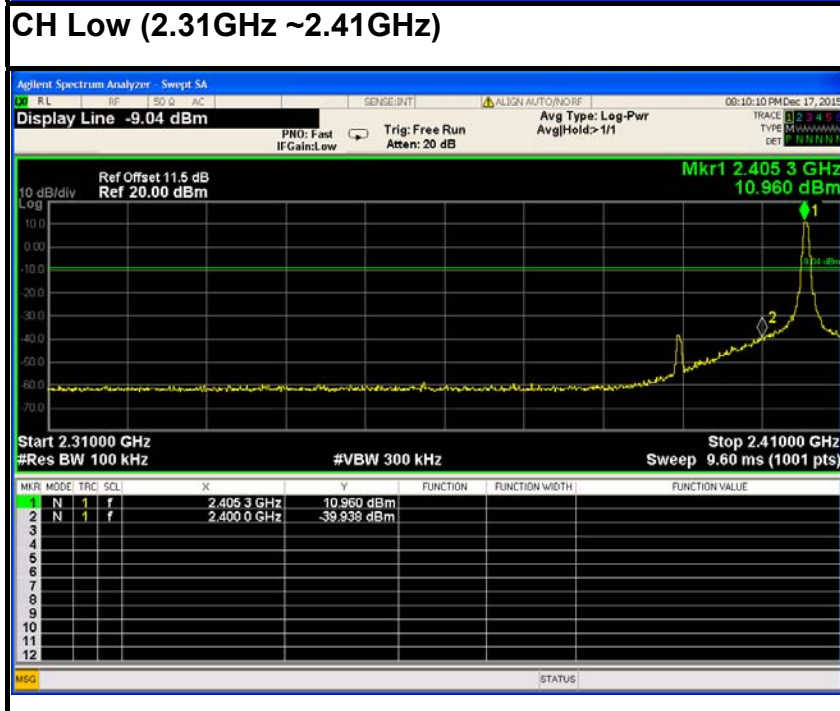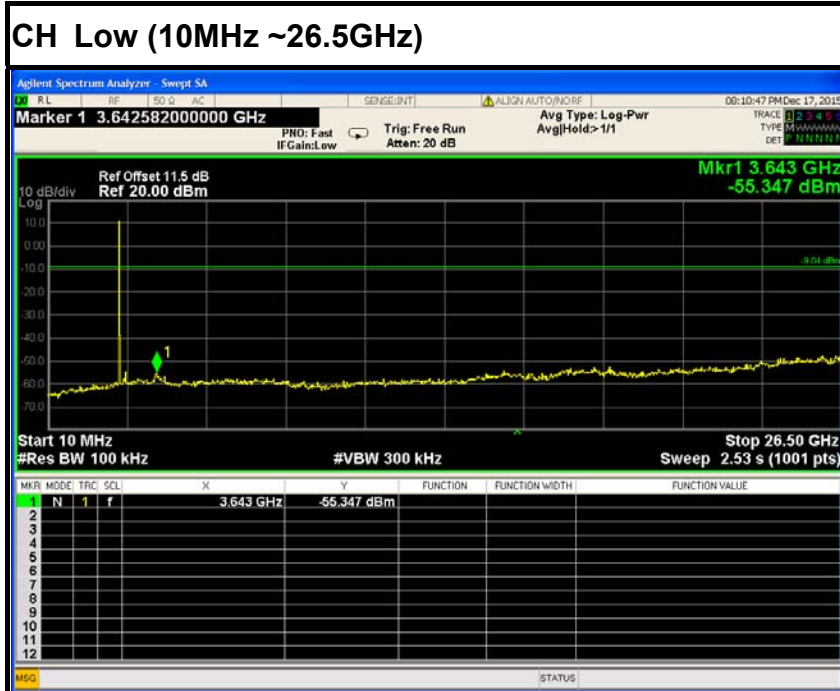

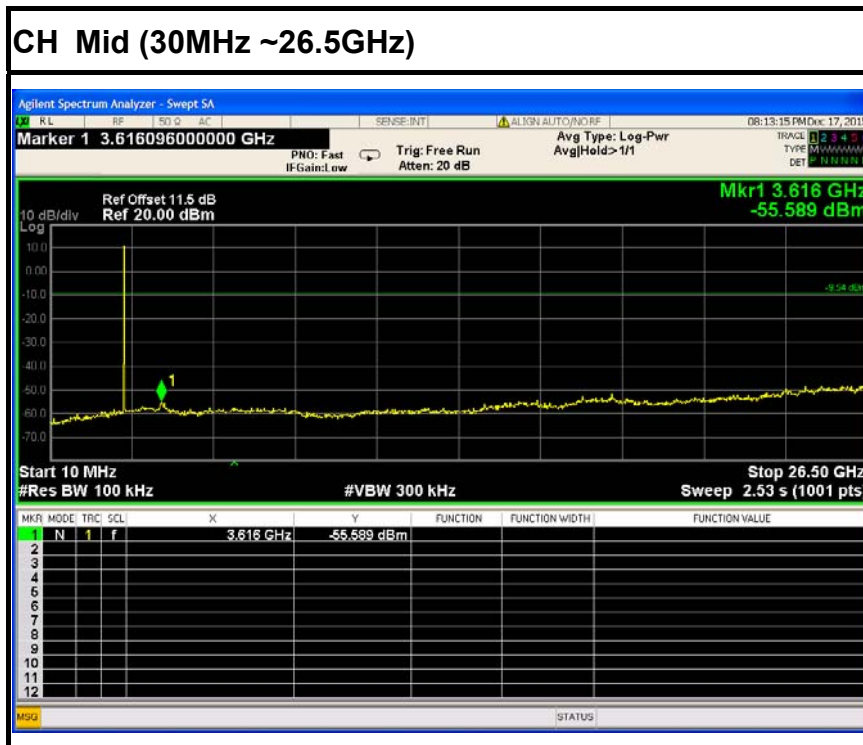

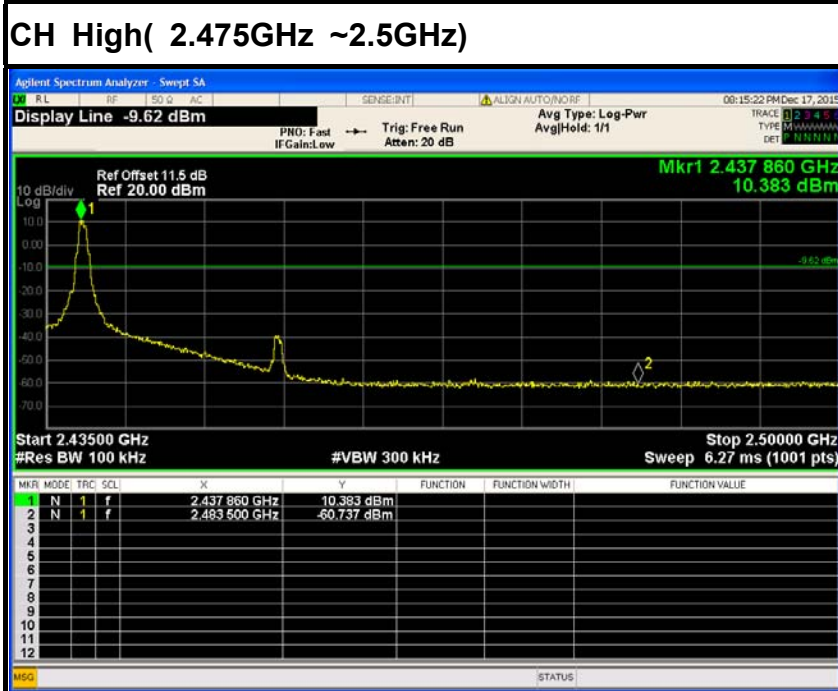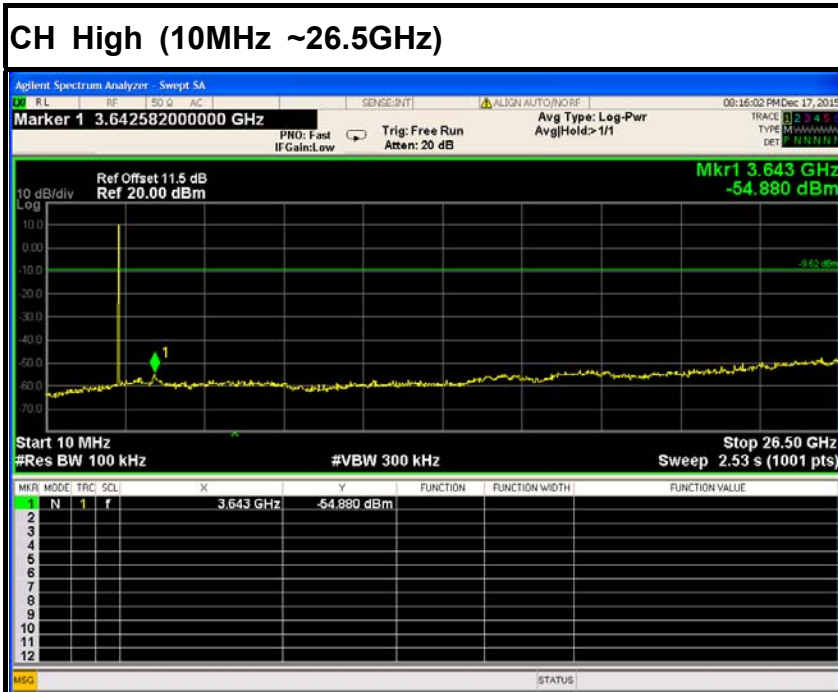

### 7.2.4.1. LIMITS OF RADIATED EMISSIONS MEASUREMENT

According to §15.209(a), except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (mV/m)	Measurement Distance (m)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100*	3
88-216	150*	3
216-960	200*	3
Above 960	500	3

**Remark:** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

1. In the emission table above, the tighter limit applies at the band edges.

Frequency (MHz)	Field Strength ( $\mu\text{V}/\text{m}$ at 3-meter)	Field Strength ( $\text{dB}\mu\text{V}/\text{m}$ at 3-meter)
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54

**NOTE:** (1) The lower limit shall apply at the transition frequencies.

(2) Emission level ( $\text{dB}\mu\text{V}/\text{m}$ ) =  $20 \log$  Emission level ( $\mu\text{V}/\text{m}$ ).

**7.2.4.2. TEST INSTRUMENTS**

<b>Radiated Emission Test Site</b>					
<b>Name of Equipment</b>	<b>Manufacturer</b>	<b>Model Number</b>	<b>Serial Number</b>	<b>Last Calibration</b>	<b>Cal. Interval</b>
Ultra-Broadband Antenna	ShwarzBeck	VULB9163	462	2014/04/12	3 years
EMI TEST Receiver	Rohde&Schwarz	ESU8	100316	2015/10/21	1 years
EMI TEST Software	Audix	E3	6.111111	N/A	N/A
Horn Antenna	EMCO	3116	00060095	2014/04/12	3 years
Pre-Amplifier	Rohde&Schwarz	SCU-01	10049	2015/10/21	1 years
Pre-Amplifier	A.H.	PAM0-0118	360	2015/10/21	1 years
Pre-Amplifier	A.H.	PAM-1840VH	562	2015/10/21	1 years
Double Ridged Horn Antenna	Rohde&Schwarz	HF907	100265	2014/04/12	3 years
Active Loop Antenna	Schwarz beck	FMZB1519	0.38	2014/04/12	3 years
TURNTABLE	MATURO	TT2.0	----	N/A	N/A
ANTENNA MAST	MATURO	TAM-4.0-P	----	N/A	N/A
Spectrum Analyzer	Rohde&Schwarz	FSU26	1166.1660.26	2015/10/21	1 years
Ultra-Broadband Antenna	ShwarzBeck	VULB9163	462	2014/04/12	3 years

- NOTE:** 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.  
2. The FCC Site Registration number is 101879.  
3. N.C.R = No Calibration Required.

**7.2.4.3. TEST PROCEDURE** (please refer to measurement standard)

1. The EUT is placed on a turntable, which is 0.8m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Set the spectrum analyzer in the following setting as:

Below 1GHz:


RBW=100kHz / VBW=300kHz / Sweep=AUTO

Above 1GHz:

(a) PEAK: RBW=VBW=1MHz / 3 MHz / Sweep=AUTO


(b) AVERAGE: RBW=1MHz / VBW=9.1kHz / Sweep=AUTO

7. Repeat above procedures until the measurements for all frequencies are complete.

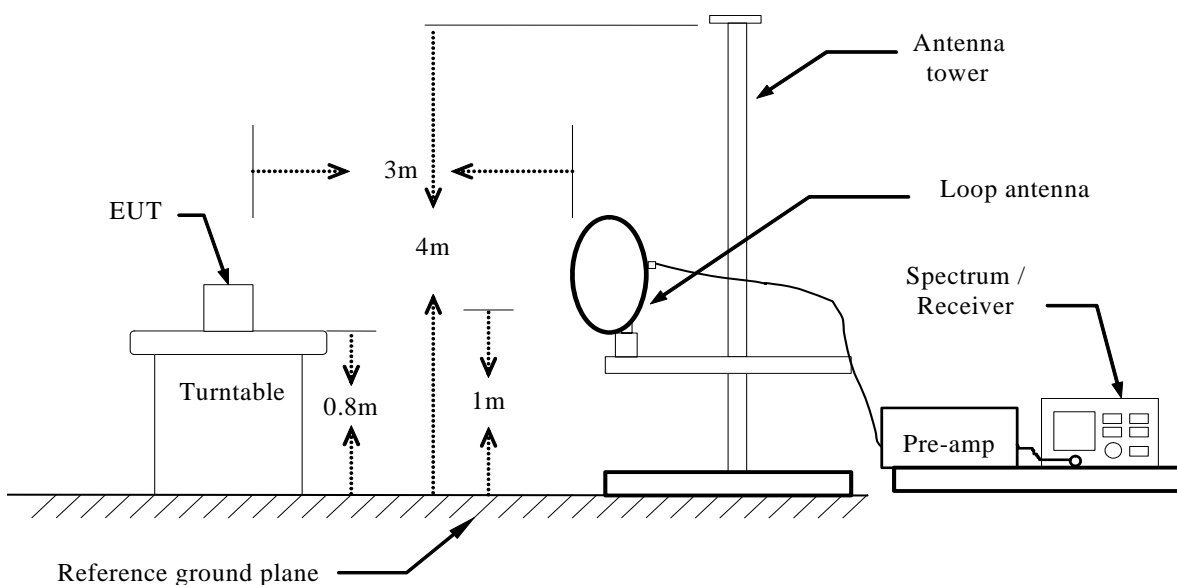
**7.2.4.4. TEST SETUP****Below 30MHz**



**Below 1 GHz**

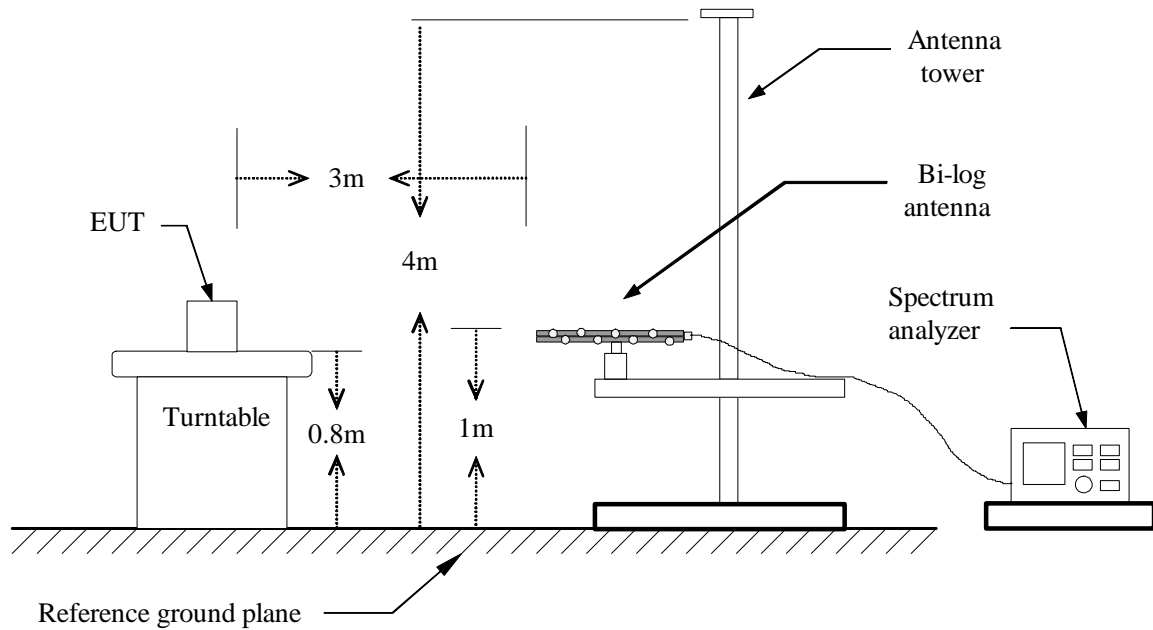

**Above 1 GHz**

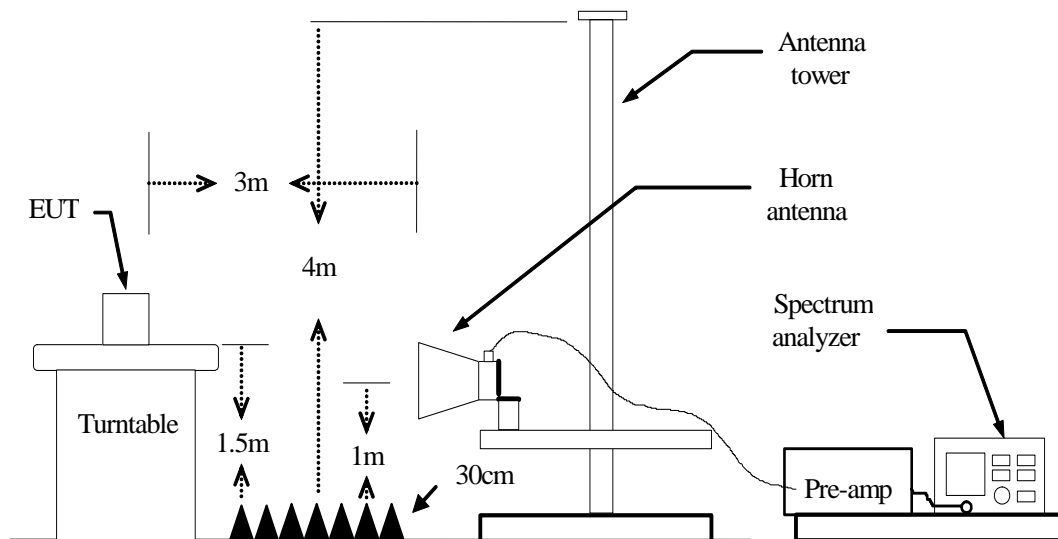

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

**7.2.4.5. DATA SAMPLE**

**Below 1GHz**

Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
XXX.XXXX	53.41	-18.63	34.78	43.50	-8.72	V	QP

Frequency (MHz) = Emission frequency in MHz  
 Reading (dBuV) = Uncorrected Analyzer / Receiver reading  
 Correct Factor (dB/m) = Antenna factor + Cable loss – Amplifier gain  
 Result (dBuV/m) = Reading (dBuV) + Corr. Factor (dB/m)  
 Limit (dBuV/m) = Limit stated in standard  
 Margin (dB) = Result (dBuV/m) – Limit (dBuV/m)  
 Q.P. = Quasi-peak Reading

**Above 1GHz**

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
XXXX.XXXX	62.09	-11.42	50.67	74.00	-23.33	V	Peak
XXXX.XXXX	49.78	-11.42	38.36	54.00	-15.64	V	AVG

Frequency (MHz) = Emission frequency in MHz  
 Reading (dBuV) = Uncorrected Analyzer / Receiver reading  
 Correction Factor (dB/m) = Antenna factor + Cable loss – Amplifier gain  
 Result (dBuV/m) = Reading (dBuV) + Corr. Factor (dB/m)  
 Limit (dBuV/m) = Limit stated in standard  
 Margin (dB) = Result (dBuV/m) – Limit (dBuV/m)  
 Peak = Peak Reading  
 AVG = Average Reading

**Calculation Formula**

Margin (dB) = Result (dBuV/m) – Limits (dBuV/m)  
 Result (dBuV/m) = Reading (dBuV) + Correction Factor

**7.2.4.6. TEST RESULTS****Below 1 GHz****Antenna 1****Test Mode:** TX**Tested by:** Ad Gan**Ambient temperature:** 24°C **Relative humidity:** 52% RH **Date:** December 18, 2015

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
37.7600	48.53	-15.48	33.05	40.00	-6.95	V	QP
168.7100	54.91	-22.87	32.04	43.50	-11.46	V	QP
216.2400	48.98	-20.79	28.19	46.00	-17.81	V	QP
600.3600	41.02	-12.86	28.16	46.00	-17.84	V	QP
768.1700	38.55	-11.11	27.44	46.00	-18.56	V	QP
831.2200	40.95	-10.60	30.35	46.00	-15.65	V	QP
37.7600	48.23	-15.48	32.75	40.00	-7.25	H	QP
174.5300	60.02	-22.93	37.09	43.50	-6.41	H	QP
305.4800	49.18	-19.36	29.82	46.00	-16.18	H	QP
600.3600	38.43	-12.86	25.57	46.00	-20.43	H	QP
666.3200	38.26	-12.22	26.04	46.00	-19.96	H	QP
827.3400	39.54	-10.53	29.01	46.00	-16.99	H	QP

**\*\*Remark:** No emission found between lowest internal used/generated frequency to 30MHz.**Notes:**

1. Radiated emissions measured in frequency range from 9kHz to 1GHz were made with an instrument using Quasi-peak detector mode.
2. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
3. The IF bandwidth of Receiver between 30MHz to 1GHz was 120kHz.
4. Frequency (MHz). = Emission frequency in MHz  
Reading (dBuV/m) = Receiver reading  
Correction Factor (dB) = Antenna factor + Cable loss – Amplifier gain  
Limit (dBuV/m) = Limit stated in standard  
Margin (dB) = Measured (dBuV/m) – Limits (dBuV/m)  
Antenna Pole (H/V) = Current carrying line of reading

**Antenna 2****Test Mode:** TX**Tested by:** Ad Gan**Ambient temperature:** 24°C **Relative humidity:** 52% RH **Date:** December 18, 2015

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
37.7600	48.53	-15.48	33.05	40.00	-6.95	V	QP
168.7100	52.91	-22.87	30.04	43.50	-13.46	V	QP
324.8800	44.26	-18.67	25.59	46.00	-20.41	V	QP
600.3600	41.52	-12.86	28.66	46.00	-17.34	V	QP
666.3200	39.31	-12.22	27.09	46.00	-18.91	V	QP
831.2200	39.95	-10.60	29.35	46.00	-16.65	V	QP
37.7600	49.23	-15.48	33.75	40.00	-6.25	H	QP
168.7100	61.36	-22.87	38.49	43.50	-5.01	H	QP
305.4800	48.18	-19.36	28.82	46.00	-17.18	H	QP
493.6600	37.89	-14.36	23.53	46.00	-22.47	H	QP
567.3800	37.50	-13.08	24.42	46.00	-21.58	H	QP
827.3400	38.54	-10.53	28.01	46.00	-17.99	H	QP

**\*\*Remark:** No emission found between lowest internal used/generated frequency to 30MHz.

**Notes:**

1. Radiated emissions measured in frequency range from 9kHz to 1GHz were made with an instrument using Quasi-peak detector mode.
2. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
3. The IF bandwidth of Receiver between 30MHz to 1GHz was 120kHz.
4. Frequency (MHz). = Emission frequency in MHz  
 Reading (dBuV/m) = Receiver reading  
 Correction Factor (dB) = Antenna factor + Cable loss – Amplifier gain  
 Limit (dBuV/m) = Limit stated in standard  
 Margin (dB) = Measured (dBuV/m) – Limits (dBuV/m)  
 Antenna Pole (H/V) = Current carrying line of reading

**Above 1 GHz****Antenna 1****Test Mode:** GFSK (CH Low)**Tested by:** Ad Gan**Ambient temperature:** 24°C **Relative humidity:** 52% RH **Date:** December 18, 2015

Frequency (MHz)	Reading (dBμV)	Correction Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
2107.000	45.14	-4.41	40.73	74.00	-33.27	V	peak
2575.000	43.80	-2.12	41.68	74.00	-32.32	V	peak
3628.000	40.30	0.02	40.32	74.00	-33.68	V	peak
4528.000	39.98	3.44	43.42	74.00	-30.58	V	peak
5230.000	40.37	5.39	45.76	74.00	-28.24	V	peak
5410.000	40.87	5.71	46.58	74.00	-27.42	V	peak
2170.000	44.44	-4.07	40.37	74.00	-33.63	H	peak
2611.000	43.89	-2.06	41.83	74.00	-32.17	H	peak
2782.000	43.62	-1.75	41.87	74.00	-32.13	H	peak
3709.000	41.59	0.36	41.95	74.00	-32.05	H	peak
4177.000	41.07	2.21	43.28	74.00	-30.72	H	peak
4447.000	40.47	3.16	43.63	74.00	-30.37	H	peak

**REMARKS:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

Test Mode: GFSK (CH Mid)Tested by: Ad GanAmbient temperature: 24°C Relative humidity: 52% RH Date: December 18, 2015

Frequency (MHz)	Reading (dB $\mu$ V)	Correction Factor (dB/m)	Result (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Antenna Pole (V/H)	Remark
2233.000	44.00	-3.72	40.28	74.00	-33.72	V	peak
2575.000	43.80	-2.12	41.68	74.00	-32.32	V	peak
3097.000	42.48	-1.20	41.28	74.00	-32.72	V	peak
3412.000	42.53	-0.67	41.86	74.00	-32.14	V	peak
4609.000	39.96	3.71	43.67	74.00	-30.33	V	peak
4807.000	39.83	4.35	44.18	74.00	-29.82	V	peak
2611.000	43.39	-2.06	41.33	74.00	-32.67	H	peak
2782.000	43.12	-1.75	41.37	74.00	-32.63	H	peak
3439.000	42.21	-0.62	41.59	74.00	-32.41	H	peak
4177.000	41.07	2.21	43.28	74.00	-30.72	H	peak
4393.000	40.73	2.97	43.70	74.00	-30.30	H	peak
4807.000	41.19	4.35	45.54	74.00	-28.46	H	peak

**REMARKS:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

Test Mode: GFSK (CH High)Tested by: Ad GanAmbient temperature: 24°C Relative humidity: 52% RH Date: December 18, 2015

Frequency (MHz)	Reading (dBμV)	Correction Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
1558.000	46.72	-6.78	39.94	74.00	-34.06	V	peak
2233.000	43.50	-3.72	39.78	74.00	-34.22	V	peak
2575.000	43.30	-2.12	41.18	74.00	-32.82	V	peak
2800.000	45.84	-1.72	44.12	74.00	-29.88	V	peak
3367.000	44.51	-0.74	43.77	74.00	-30.23	V	peak
4267.000	41.70	2.53	44.23	74.00	-29.77	V	peak
2170.000	44.94	-4.07	40.87	74.00	-33.13	H	peak
2611.000	45.39	-2.06	43.33	74.00	-30.67	H	peak
2782.000	44.12	-1.75	42.37	74.00	-31.63	H	peak
4087.000	42.92	1.90	44.82	74.00	-29.18	H	peak
4420.000	42.77	3.07	45.84	74.00	-28.16	H	peak
4807.000	42.69	4.35	47.04	74.00	-26.96	H	peak

**REMARKS:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

**Antenna 2****Test Mode:** GFSK (CH Low)**Tested by:** Ad Gan**Ambient temperature:** 24°C **Relative humidity:** 52% RH **Date:** December 18, 2015

Frequency (MHz)	Reading (dBμV)	Correction Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
2107.000	45.14	-4.41	40.73	74.00	-33.27	V	peak
2575.000	43.30	-2.12	41.18	74.00	-32.82	V	peak
4267.000	42.20	2.53	44.73	74.00	-29.27	V	peak
4789.000	40.75	4.29	45.04	74.00	-28.96	V	peak
5410.000	40.37	5.71	46.08	74.00	-27.92	V	peak
6544.000	41.78	6.96	48.74	74.00	-25.26	V	peak
2170.000	44.94	-4.07	40.87	74.00	-33.13	H	peak
2539.000	44.27	-2.19	42.08	74.00	-31.92	H	peak
2782.000	43.62	-1.75	41.87	74.00	-32.13	H	peak
3268.000	45.13	-0.91	44.22	74.00	-29.78	H	peak
4087.000	42.42	1.90	44.32	74.00	-29.68	H	peak
4807.000	40.69	4.35	45.04	74.00	-28.96	H	peak

**REMARKS:**

7. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
8. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
9. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
10. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
11. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
12. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Test Mode: GFSK (CH Mid)Tested by: Ad GanAmbient temperature: 24°C Relative humidity: 52% RH Date: December 18, 2015

Frequency (MHz)	Reading (dBμV)	Correction Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
2233.000	44.50	-3.72	40.78	74.00	-33.22	V	peak
2575.000	45.30	-2.12	43.18	74.00	-30.82	V	peak
3763.000	43.21	0.59	43.80	74.00	-30.20	V	peak
4942.000	40.92	4.79	45.71	74.00	-28.29	V	peak
5410.000	40.87	5.71	46.58	74.00	-27.42	V	peak
6211.000	40.10	6.42	46.52	74.00	-27.48	V	peak
2170.000	44.94	-4.07	40.87	74.00	-33.13	H	peak
2611.000	44.89	-2.06	42.83	74.00	-31.17	H	peak
3268.000	45.63	-0.91	44.72	74.00	-29.28	H	peak
4087.000	40.92	1.90	42.82	74.00	-31.18	H	peak
4807.000	42.19	4.35	46.54	74.00	-27.46	H	peak
5194.000	40.96	5.33	46.29	74.00	-27.71	H	peak

**REMARKS:**

7. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
8. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
9. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
10. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
11. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
12. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

Test Mode: GFSK (CH High)Tested by: Ad GanAmbient temperature: 24°C Relative humidity: 52% RH Date: December 18, 2015

Frequency (MHz)	Reading (dBμV)	Correction Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
2233.000	43.00	-3.72	39.28	74.00	-34.72	V	peak
2575.000	44.80	-2.12	42.68	74.00	-31.32	V	peak
3241.000	45.94	-0.96	44.98	74.00	-29.02	V	peak
3979.000	42.31	1.50	43.81	74.00	-30.19	V	peak
4267.000	42.70	2.53	45.23	74.00	-28.77	V	peak
5104.000	40.42	5.17	45.59	74.00	-28.41	V	peak
2170.000	43.94	-4.07	39.87	74.00	-34.13	H	peak
2782.000	43.12	-1.75	41.37	74.00	-32.63	H	peak
3259.000	41.62	-0.92	40.70	74.00	-33.30	H	peak
3790.000	40.35	0.70	41.05	74.00	-32.95	H	peak
4177.000	41.07	2.21	43.28	74.00	-30.72	H	peak
4807.000	41.19	4.35	45.54	74.00	-28.46	H	peak

**REMARKS:**

7. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
8. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
9. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
10. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
11. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
12. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

## 7.3. 6dB BANDWIDTH MEASUREMENT

### 7.3.1. LIMITS

According to §15.247(a)(2), systems using digital modulation techniques may operate in the 902 - 928 MHz, 2400 - 2483.5MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.


### 7.3.2. TEST INSTRUMENTS

Name of Equipment	Manufacturer	Model	Serial Number	Last Calibration	Calibration Due
PXA Signal Analyzer	Agilent	N9030A	JTT-E003	2015/04/22	2016/04/21

### 7.3.3. TEST PROCEDURES (please refer to measurement standard)

1. Place the EUT on the table and set it in the transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set the spectrum analyzer as RBW = 100kHz, VBW = 300kHz, Span = 3MHz, Sweep = auto.
4. Mark the peak frequency and -6dB (upper and lower) frequency.
5. Repeat until all the rest channels are investigated.

### 7.3.4. TEST SETUP



**7.3.5. TEST RESULTS***No non-compliance noted***Test Data****Antenna 1**



Channel	Frequency (MHz)	Bandwidth (kHz)	Limit (kHz)	Margin (kHz)
Low	2405.5	560.8	>500	PASS
Mid	2419	564.2		PASS
High	2438	565.0		PASS


**Antenna 2**

Channel	Frequency (MHz)	Bandwidth (kHz)	Limit (kHz)	Margin (kHz)
Low	2405.5	559.9	>500	PASS
Mid	2419	561.7		PASS
High	2438	564.1		PASS


**Test Plot**

**Antenna 1**

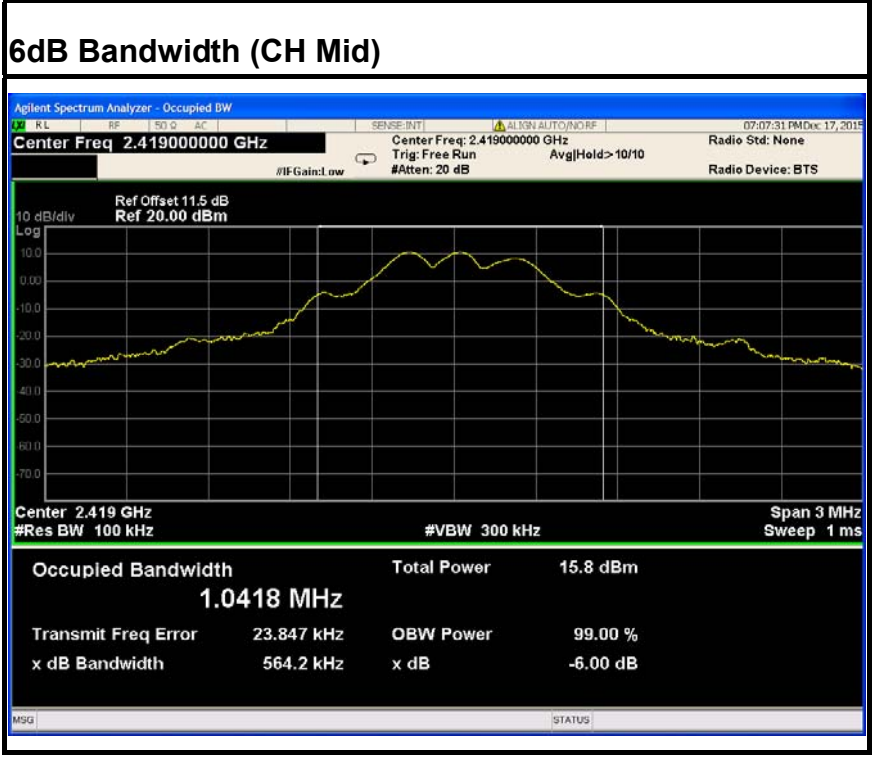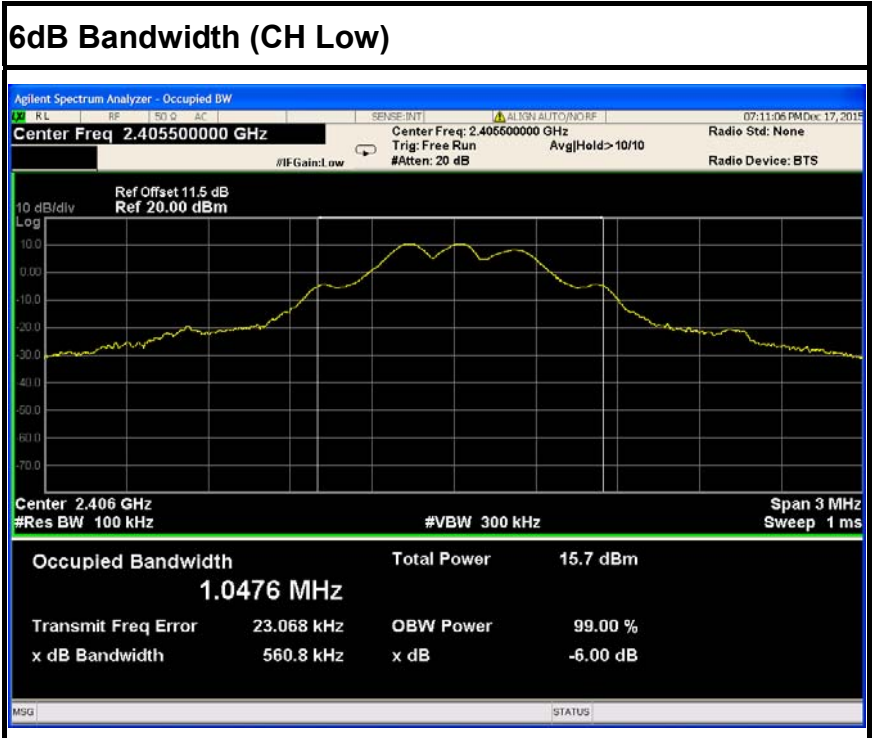

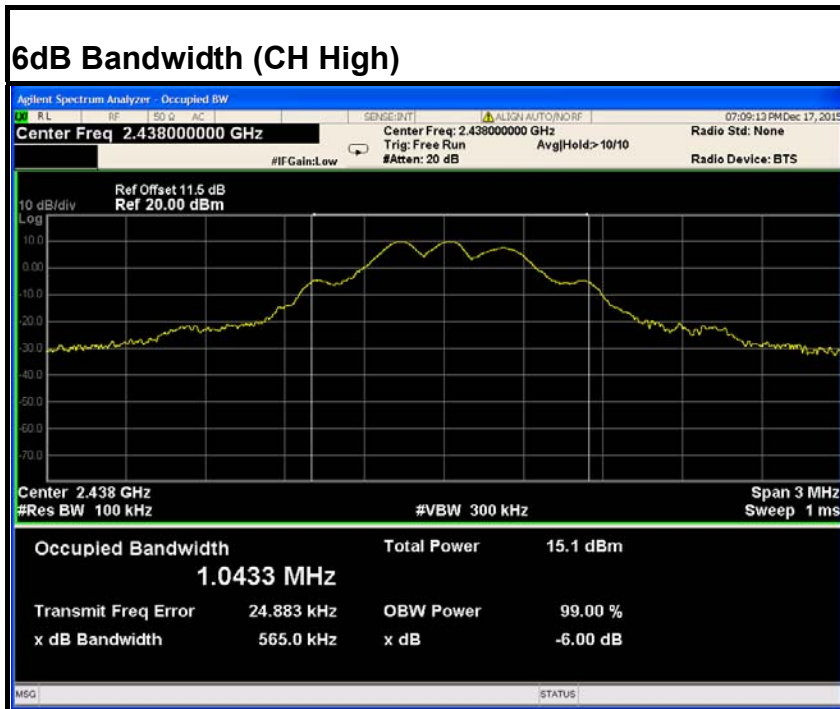


## Antenna 2

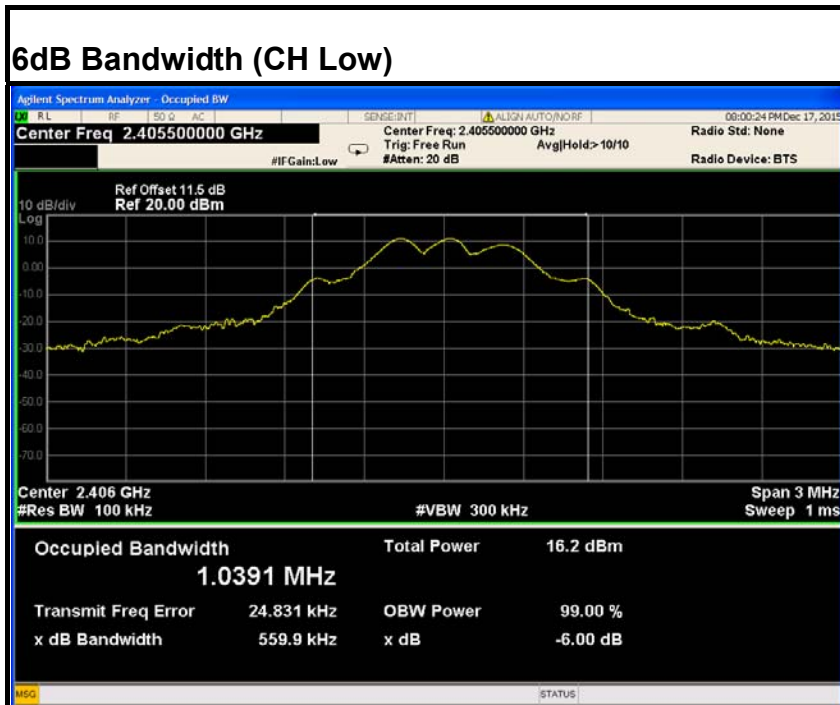

### 6dB Bandwidth (CH Mid)



### 6dB Bandwidth (CH High)

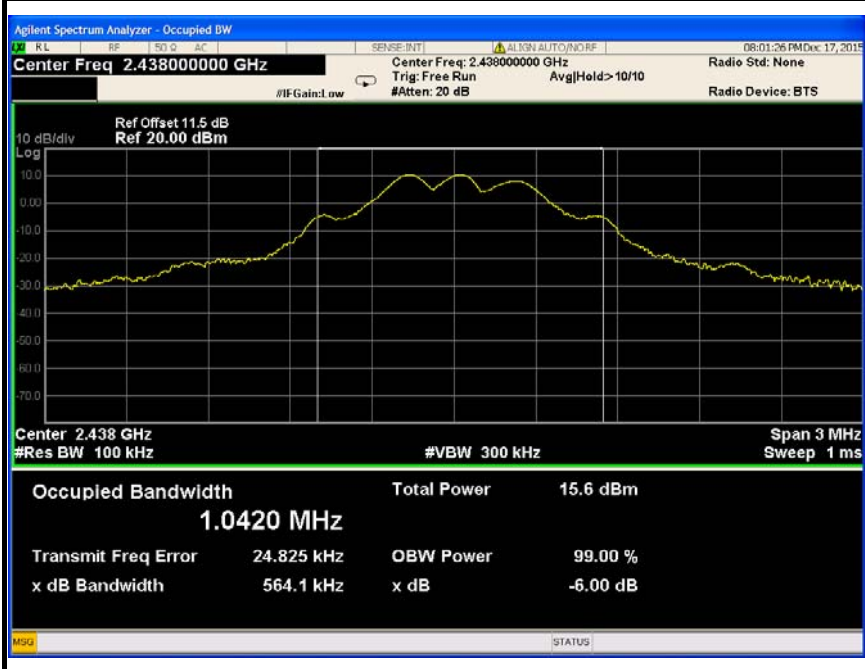

## 7.4. PEAK OUTPUT POWER

### 7.4.1. LIMITS

The maximum peak output power of the intentional radiator shall not exceed the following:

1. According to §15.247(b)(3), for systems using digital modulation in the bands of 902-928 MHz, 2400-2483.5 MHz: 1 Watt.
2. According to §15.247(b)(4), the conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

### 7.4.2. TEST INSTRUMENTS

Name of Equipment	Manufacturer	Model	Serial Number	Last Calibration	Calibration Due
Power Sensor	Rohde&Schwarz	NRP-Z81	102638	2015/10/28	2016/10/27
Spectrum Analyzer	Rohde&Schwarz	FSU26	1166.1660.26	2015/10/21	2016/10/20

### 7.4.3. TEST PROCEDURES (please refer to measurement standard)

#### 9.1.1 RBW $\geq$ DTS bandwidth

This procedure shall be used when the measurement instrument has available a resolution bandwidth that is greater than the *DTS bandwidth*.

- a) Set the RBW  $\geq$  *DTS bandwidth*.
- b) Set VBW  $\geq$  3 RBW.
- c) Set span  $\geq$  3 x RBW
- d) Sweep time = auto couple.
- e) Detector = peak.
- f) Trace mode = max hold.
- g) Allow trace to fully stabilize.
- h) Use peak marker function to determine the peak amplitude level.

#### 9.1.2 Integrated band power method

This procedure may be used when the maximum available RBW of the measurement instrument is less than the *DTS bandwidth*.

- a) Set the RBW = 1 MHz.
- b) Set the VBW  $\geq$  3 RBW
- c) Set the span  $\geq$  1.5 x DTS bandwidth.
- d) Detector = peak.
- e) Sweep time = auto couple.
- f) Trace mode = max hold.
- g) Allow trace to fully stabilize.
- h) Use the instrument's band/channel power measurement function with the band limits set equal to the DTS bandwidth edges (for some instruments, this may require a manual




override to select peak detector). If the instrument does not have a band power function, sum the spectrum levels (in linear power units) at intervals equal to the RBW extending across the DTS bandwidth.

### **9.1.3 PKPM1 Peak power meter method**

The maximum peak conducted output power may be measured using a broadband peak RF power meter. The power meter shall have a video bandwidth that is greater than or equal to the DTS bandwidth and shall utilize a fast-responding diode detector.

**7.4.4. TEST SETUP**

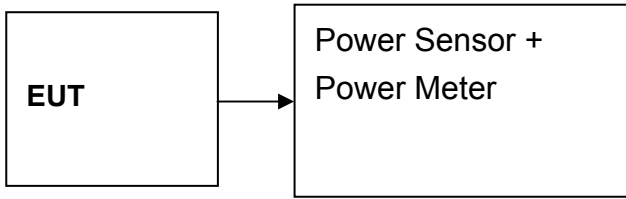

**7.4.5. TEST RESULTS**

*No non-compliance noted*

**Test Data**

**Antenna 1**

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)	Limit (W)	Peak/AVG	Result
Low	2405.5	9.99	0.00998	1	Peak	PASS
Mid	2419	8.78	0.00755			PASS
High	2438	7.85	0.00610			PASS
Low	2405.5	6.01	0.00399	1	AVG	PASS
Mid	2419	5.13	0.00326			PASS
High	2438	4.74	0.00298			PASS

**Antenna 2**

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)	Limit (W)	Peak/AVG	Result
Low	2405.5	9.59	0.00910	1	Peak	PASS
Mid	2419	8.77	0.00753			PASS
High	2438	7.85	0.00610			PASS
Low	2405.5	6.85	0.00484	1	AVG	PASS
Mid	2419	5.22	0.00333			PASS
High	2438	4.81	0.00303			PASS

## 7.5. ANTENNA GAIN

### MEASUREMENT

The antenna gain of the complete system is calculated by the difference of radiated power in EIRP and the conducted power of the module. For normal BT devices, the GFSK mode is used.

### MEASUREMENT PARAMETERS

Measurement parameter	
Detector	Peak
Sweep time	Auto
Resolution bandwidth	3 MHz
Video bandwidth	3 MHz
Trace-Mode	Max hold

### LIMITS

FCC	IC
Antenna Gain	
6 dBi	

## TEST RESULTS

### GFSK

#### Antenna 1

$T_{nom}$	$V_{nom}$	Lowest channel 2405.5MHz	Middle channel 2419MHz	Highest channel 2438MHz
Conducted power [dBm] Measured with GFSK modulation		9.99	8.78	7.85
Radiated power [dBm] Measured with GFSK modulation		2.47	1.69	0.90
Gain [dBi] Calculated		-7.52	-7.09	-6.95
Measurement uncertainty		$\pm 1.5$ dB (cond.) / $\pm 3$ dB (rad.)		

#### Antenna 2

$T_{nom}$	$V_{nom}$	Lowest channel 2405.5MHz	Middle channel 2419MHz	Highest channel 2438MHz
Conducted power [dBm] Measured with GFSK modulation		9.59	8.77	7.85
Radiated power [dBm] Measured with GFSK modulation		2.97	1.57	0.17
Gain [dBi] Calculated		-6.62	-7.20	-7.68
Measurement uncertainty		$\pm 1.5$ dB (cond.) / $\pm 3$ dB (rad.)		

## 7.6. BAND EDGES MEASUREMENT

### 7.6.1. LIMITS

According to §15.247(d), in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in 15.209(a) (see Section 15.205(c)).

### 7.6.2. TEST INSTRUMENTS

Radiated Emission Test Site					
Name of Equipment	Manufacturer	Model Number	Serial Number	Last Calibration	Cal. Interval
Ultra-Broadband Antenna	ShwarzBeck	VULB9163	462	2014/04/12	3 years
EMI TEST Receiver	Rohde&Schwarz	ESU8	100316	2015/10/21	1 years
EMI TEST Software	Audix	E3	6.111111	N/A	N/A
Horn Antenna	EMCO	3116	00060095	2014/04/12	3 years
Pre-Amplifier	Rohde&Schwarz	SCU-01	10049	2015/10/21	1 years
Pre-Amplifier	A.H.	PAM0-0118	360	2015/10/21	1 years
Pre-Amplifier	A.H.	PAM-1840VH	562	2015/10/21	1 years
Double Ridged Horn Antenna	Rohde&Schwarz	HF907	100265	2014/04/12	3 years
Active Loop Antenna	Schwarz beck	FMZB1519	0.38	2014/04/12	3 years
TURNTABLE	MATURO	TT2.0	----	N/A	N/A
ANTENNA MAST	MATURO	TAM-4.0-P	----	N/A	N/A
Spectrum Analyzer	Rohde&Schwarz	FSU26	1166.1660.26	2015/10/21	1 years
Ultra-Broadband Antenna	ShwarzBeck	VULB9163	462	2014/04/12	3 years


**NOTE:** 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

2. The FCC Site Registration number is 101879.

3. N.C.R = No Calibration Required.

**7.6.3. TEST PROCEDURES** (please refer to measurement standard)

1. The EUT is placed on a turntable, which is 0.8m above the ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emission.
4. Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission:
  - (a) PEAK: RBW=1MHz / VBW=1MHz / Sweep=AUTO
  - (b) AVERAGE: RBW=1MHz / VBW=9.1kHz / Sweep=AUTO
5. Repeat the procedures until all the PEAK and AVERAGE versus POLARIZATION are


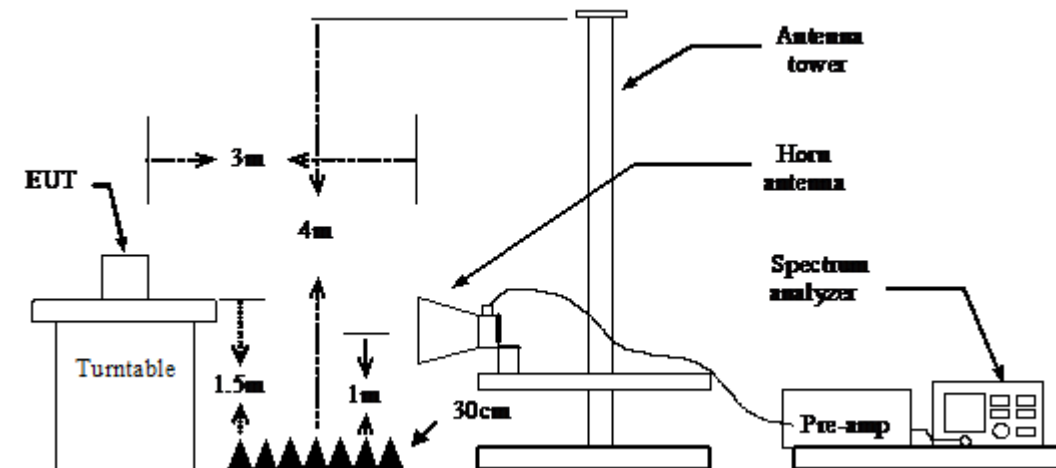
**7.6.4. TEST SETUP**

### 7.6.5. TEST RESULTS



#### Test Plot

#### Antenna 1

#### Band Edges (CH Low)

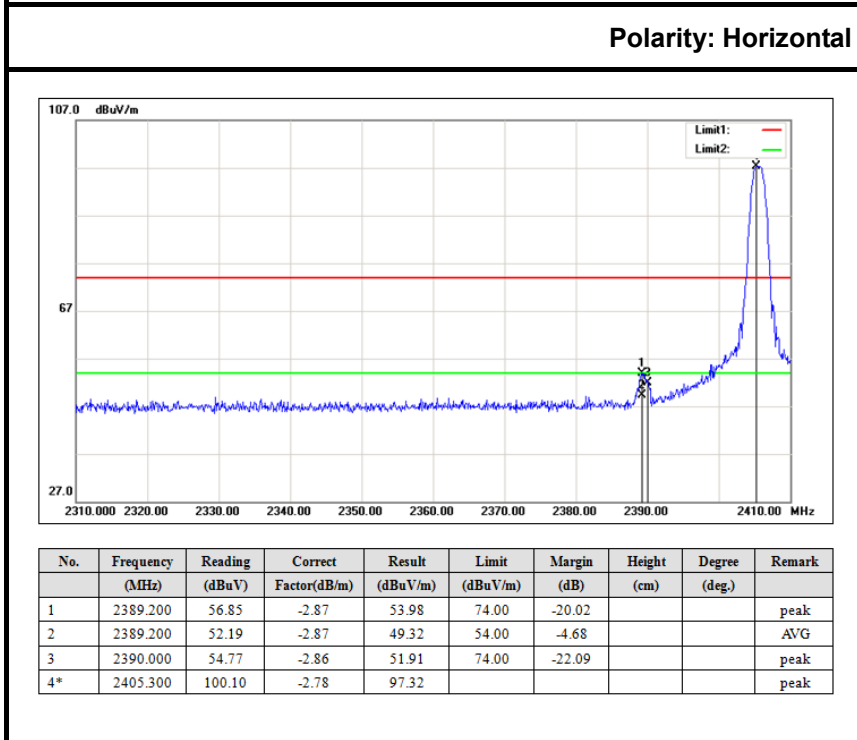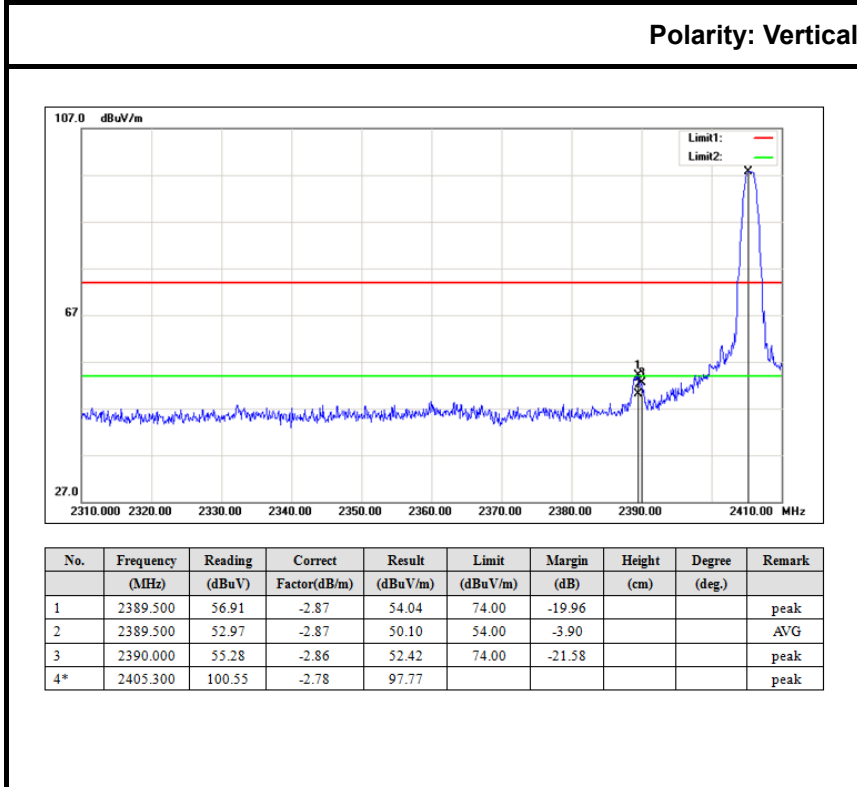



### Band Edges (CH-High)

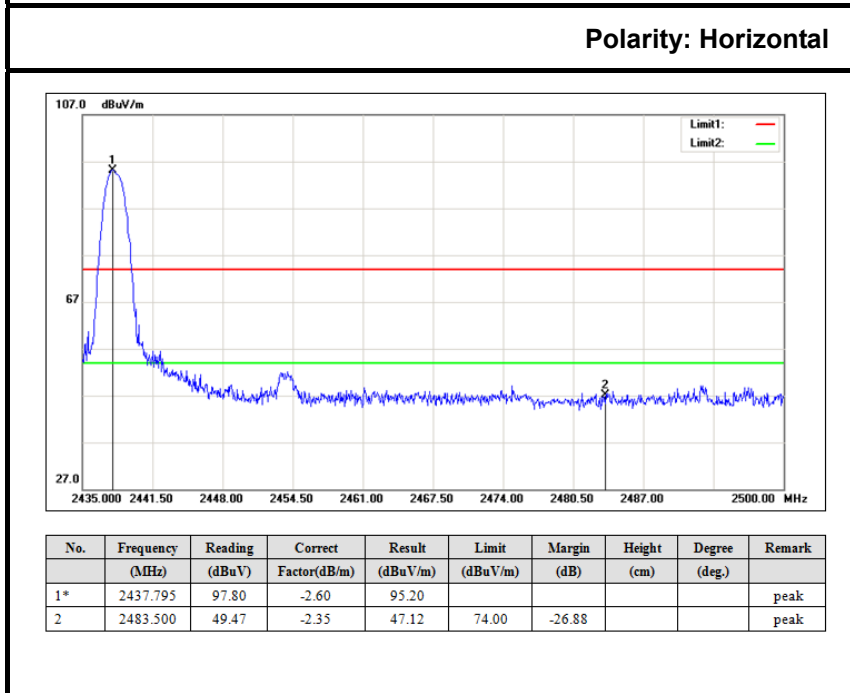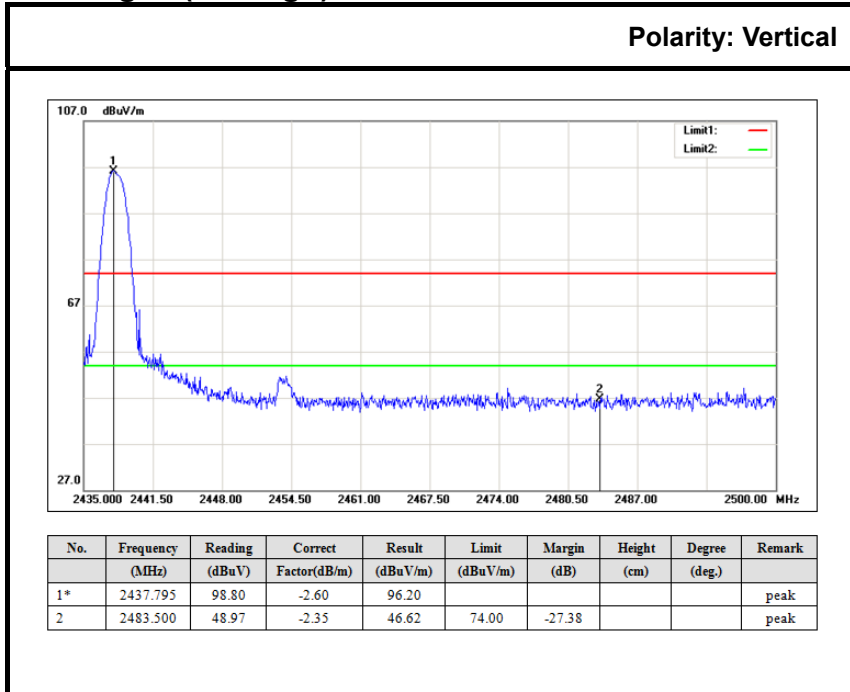





## Antenna 2

### Band Edges (CH Low)

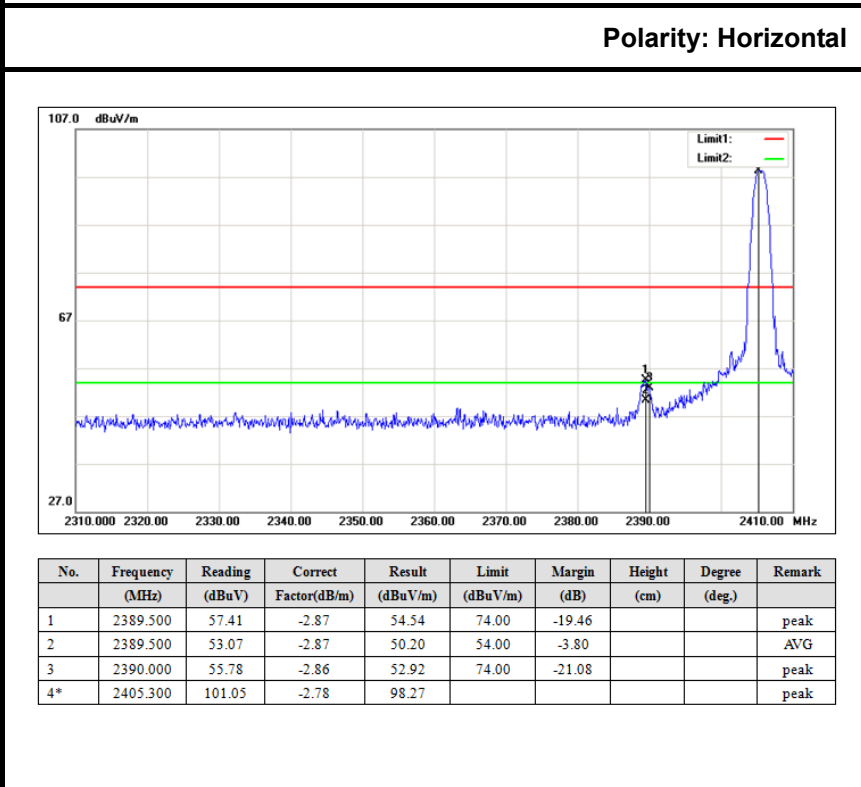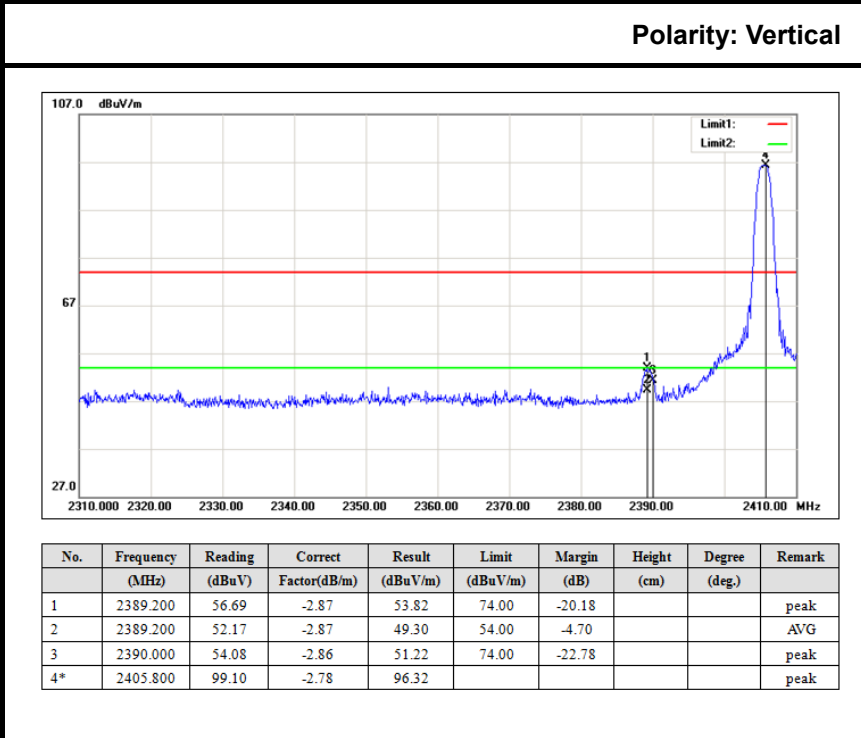

### Band Edges (CH-High)

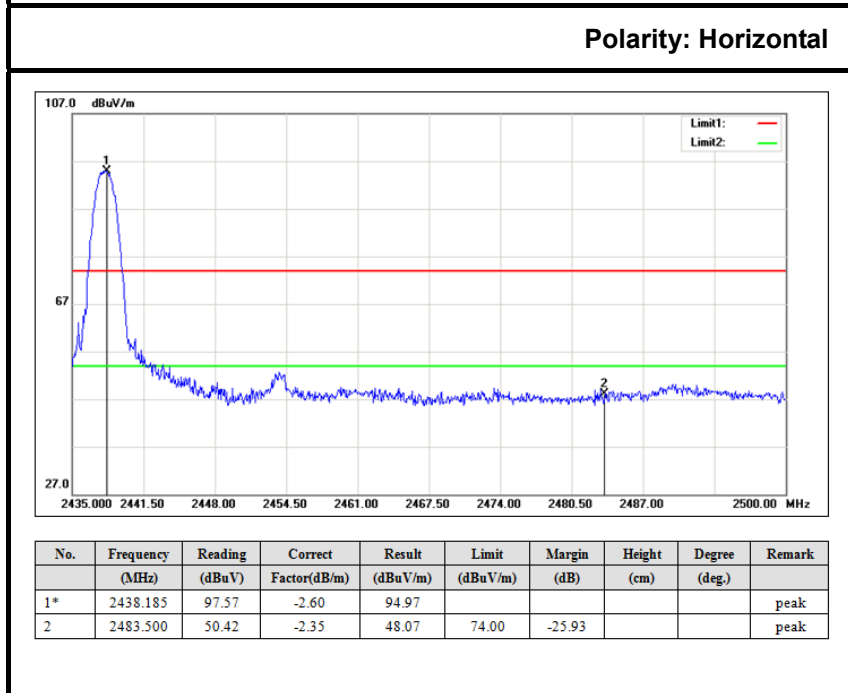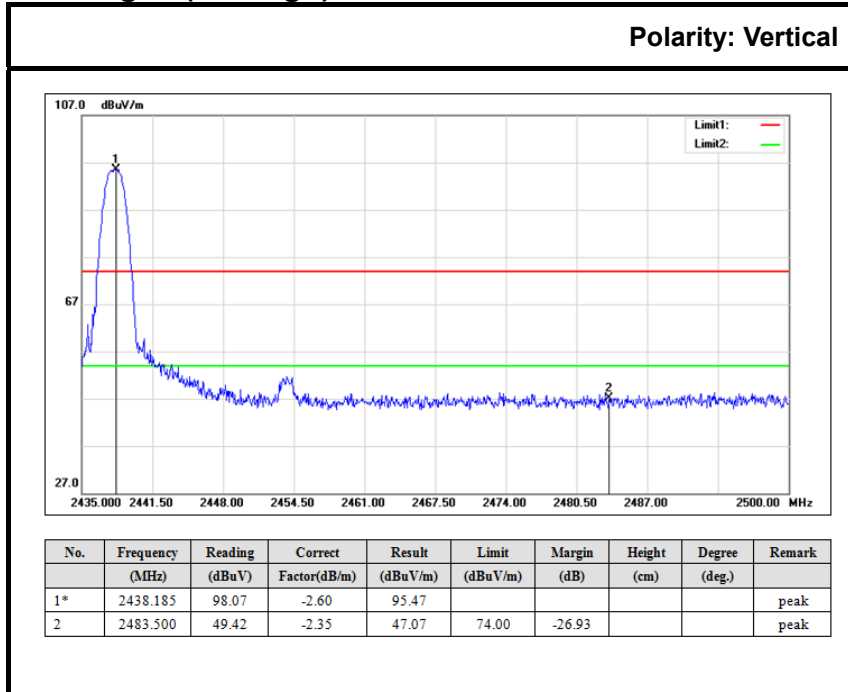

## 7.7. PEAK POWER SPECTRAL DENSITY MEASUREMENT

### 7.7.1. LIMITS

According to §15.247(e), for digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

According to §15.247(f), the digital modulation operation of the hybrid system, with the frequency hopping turned off, shall comply with the power density requirements of paragraph (d) of this section.


### 7.7.2. TEST INSTRUMENTS

Name of Equipment	Manufacturer	Model	Serial Number	Last Calibration	Calibration Due
PXA Signal Analyzer	Agilent	N9030A	JTT-E003	2015/04/22	2016/04/21

### 7.7.3. TEST PROCEDURES (please refer to measurement standard)

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS bandwidth.
3. Set the RBW to:  $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$ .
4. Set the VBW  $\geq 3 \text{ RBW}$ .
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

### 7.7.4. TEST SETUP



**7.7.5. TEST RESULTS***No non-compliance noted***Test Data****Antenna 1**


Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Test Result
Low	2405.5	5.278	8.00	PASS
Mid	2419	4.768		PASS
High	2438	4.120		PASS

**Antenna 2**

Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Test Result
Low	2405.5	5.241	8.00	PASS
Mid	2419	4.891		PASS
High	2438	4.148		PASS

### Test Plot Antenna 1

#### PPSD (CH Low)

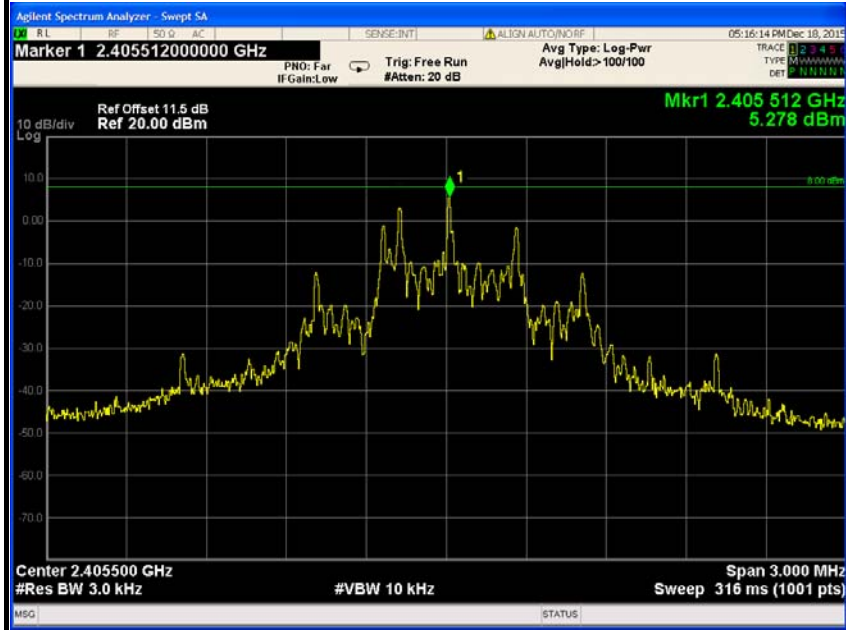


#### PPSD (CH Mid)





## Antenna 2

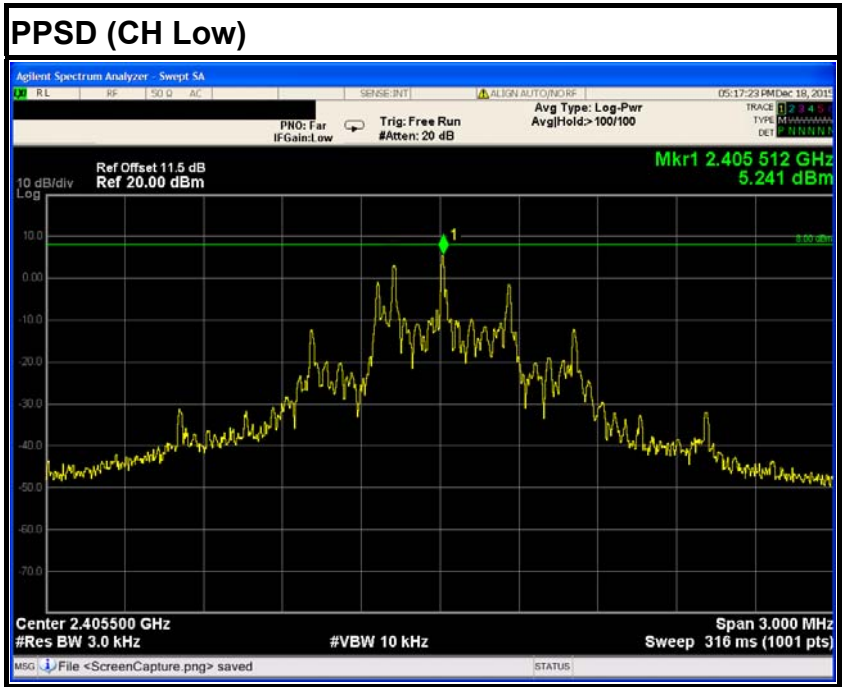

### PPSD (CH Mid)



### PPSD (CH High)

