

**PARTIAL TEST REPORT**  
**No.: 17-1-022101T19a-C1**

According to:  
**FCC Regulations**  
 Part 22, Part 24, Part 27

**ISED-Regulations**  
 RSS-132 Issue 3, RSS-133 Issue 6,  
 RSS-139 Issue 3, RSS-Gen Issue 5  
 RSS-130 Issue 1

for

**Actia Nordic AB**

**Telematic Device**  
**ACUII-06**

**FCC ID: 2AGKKACUII-06H2**  
**ISED: 20839-ACUII06H2**

Laboratory Accreditation and Listings		
<p>Accredited EMC-Test Laboratory</p>	<p>Industry Canada                      Reg. No.: 3462D-1                      Reg. No.: 3462D-2                      Reg. No.: 3462D-3</p>	<p>Voluntary Controls for Electromagnetic Emissions                      Reg. No.:                      R-4452, C-20009,                      T-20006, G-20013</p>
<p>AUTHORIZED RF LABORATORY</p>	<p>Lab Code: 20011130-00</p>	<p>MRA US-EU 0003</p>
accredited according to DIN EN ISO/IEC 17025		
<p align="center"><b>CETECOM GmbH</b>                      Laboratory Radio Communications &amp; Electromagnetic Compatibility                      Im Teelbruch 116 • 45219 Essen • Germany                      Registered in Essen, Germany, Reg. No.: HRB Essen 8984                      Tel.: + 49 (0) 20 54 / 95 19-954 • Fax: + 49 (0) 20 54 / 95 19-964                      E-mail: info@cetecom.com • Internet: www.cetecom.com</p>		
Laboratory Accreditation and Listings		

## Table of contents

<b>1. SUMMARY OF TEST RESULTS.....</b>	<b>3</b>
1.1. TX mode, Test overview of FCC Canada ISED (RSS) Standards.....	3
1.2. RX mode, tests overview according FCC Part 15B and Canadian RSS Standards .....	5
1.3. Attestation:.....	5
<b>2. ADMINISTRATIVE DATA .....</b>	<b>6</b>
2.1. Identification of the testing laboratory .....	6
2.2. Test location .....	6
2.3. Organizational items .....	6
2.4. Applicant's details .....	6
2.5. Manufacturer's details .....	6
<b>3. EQUIPMENT UNDER TEST (EUT) .....</b>	<b>7</b>
3.1. TECHNICAL W-CDMA DATA OF MAIN EUT DECLARED BY APPLICANT .....	7
3.2. EUT: Type, S/N etc. and short descriptions used in this test report .....	9
3.3. Auxiliary Equipment (AE): Type, S/N etc. and short descriptions .....	9
3.4. EUT set-ups .....	10
3.5. EUT operating modes .....	10
<b>4. DESCRIPTION OF TEST SYSTEM SET-UP'S .....</b>	<b>11</b>
4.1. Test system set-up for conducted measurements on antenna port .....	11
4.2. Test system set-up for radiated magnetic field measurements below 30 MHz .....	12
4.3. Test system set-up for radiated spurious emission measurements .....	13
<b>5. MEASUREMENTS .....</b>	<b>14</b>
5.1. RF-Parameter - RF Peak power output conducted and PAPR-Value .....	14
5.2. General Limit - Radiated field strength emissions below 30 MHz .....	16
5.3. RF-Parameter - Radiated out of Band RF emissions and Band Edge .....	19
5.4. Measurement uncertainties .....	27
<b>6. ABBREVIATIONS USED IN THIS REPORT .....</b>	<b>28</b>
<b>7. ACCREDITATION DETAILS OF CETECOM'S LABORATORIES AND TEST SITES .....</b>	<b>28</b>
<b>8. INSTRUMENTS AND ANCILLARY .....</b>	<b>29</b>
8.1. Used equipment "CTC" .....	29
<b>9. VERSIONS OF TEST REPORTS (CHANGE HISTORY) .....</b>	<b>33</b>

## Table of annex

	Total pages
<b>Annex 1: Measurement diagrams</b> - separate document CETECOM-TR17-1-0221001T19-A1	38
<b>Annex 2: Internal photographs of EUT</b> (separate document) CETECOM_ TR17-1-0221001T19-A2	9
<b>Annex 3: External photographs of EUT</b> (separate document) CETECOM_ TR17-1-0221001T19-A3	13
<b>Annex 4: Test set-up photographs</b> (separate document) CETECOM_ TR17-1-0221001T19-A4	8

The listed attachments are an integral part of this report.

## 1. Summary of test results

The test results apply exclusively to the test samples as presented in this Report. The CETECOM GmbH does not assume responsibility for any conclusions and generalizations taken in conjunction with other specimens or samples of the type of the item presented to tests. Also we refer on special conditions which the applicant should fulfill according §2.927 to §2.948, special focus regarding modification of the equipment and availability of sample equipment for market surveillance tests.

The Equipment Under Test (in this report, hereinafter referred as EUT) supports radiofrequency technologies. Delta tests apply to check for conformance against valid standards due already approved cellular wireless module ALS3-USR3 with FCC-ID: QIPALS3-USR3 and ISED: 7830A-ALS3USR3. Due no modifications on the WCDMA Part of the module only radiated tests have been performed in three channels for radiated spurious emission tests and two extreme channels for radiated band-edge emission tests. In addition power verification tests have been performed too.

Following tests have been performed to show compliance with applicable FCC Part 2, Part 22, Subpart H and Part 24, Subpart E (Broadband PCS) of the FCC CFR Title 47 Rules, Edition 2017 standards and Canada RSS-132 Issue 3, RSS-133 Issue 6, and RSS-Gen Issue 5 standards.

### 1.1. TX mode, Test overview of FCC Canada ISED (RSS) Standards

No. of Diagram group	Test case	Port	References & Limits			EUT set-up	EUT op-mode	Result
			FCC Standard	RSS Section	Test limit			
1	AC-Power Lines Emissions Conducted (0,15 - 30 MHz)	AC-Power lines (conducted)	§ 15.207	RSS-Gen, Issue 5: Chapter 8.8	§15.207 limits  ISED: Table 3	--	--	N/A
2	General field strength emissions (9 kHz - 30 MHz)	Enclosure + Inter-connecting cables (radiated)	§15.209(a)	RSS-Gen, Issue 5: Chapter 8.9, Table 5+6	2400/F(kHz) µV/m 24000/F(kHz) µV/m 30 µV/m	1	1,2,3	passed
7	RF-Power (ERP/EIRP)		§2.1046	RSS-132, Issue 3: Chapter 5.4 SRSP-503: 5.1.3	< 7 Watt (ERP)	1	1,2,3	Passed  (calculated from conducted result and antenna gain)
			§22.913(a)(2)	RSS-133, Issue 6 Chapter 4.1/6.4 SRSP-510: 5.1.2	< 2 Watt (EIRP)			
			§24.232(c)	RSS-139: Issue 3 Chapter 6.5 SRSP-513: 5.1.2	< 1 Watt (EIRP)			
8	Spurious emissions		§2.1053(a) §2.1057	RSS-132: Chapter 5.5(i)(ii)	Required attenuation below P(dBW): 43+10log(P) dBc	1	1,2,3	passed
9	Band-Edge compliance	§22.917(a)(b) §24.238(a)(b)	RSS-133: Chapter 6.5.1(i)(ii)	1		1,2,3	passed	

No. of Diagram group	Test case	Port	References & Limits			EUT set-up	EUT op-mode	Result
			FCC Standard	RSS Section	Test limit			
30	RF Power	Antenna terminal (conducted)	§2.1046	RSS-132: Chapter 5.4 SRSP-503: 5.1.3  RSS-133: Chapter 4.1/6.4 SRSP-510: 5.1.2	< 7 Watt (ERP)  < 2 Watt (EIRP)  < 1 Watt (EIRP)	2	1,2,3	passed
34	26dB Emission bandwidth		§2.202 §2.1049(h) §22.917(a) §24.238(a) §27.53(h)	RSS-Gen., Issue 5: Chapter 6.6	99% Power	--	--	Remark *1)
35	99% Occupied bandwidth		--	--	--	--	--	Remark *1)
36	Spurious emissions		§2.1051 §2.1057	RSS-132, Issue 3: 5.5(i)(ii) RSS-133, Issue 6: 6.5.1(i)(ii)	Required attenuation below P(dBW): 43+10log(P) dBc	--	--	Remark *1)
37	Band-Edge compliance		§22.917(a)(b) §24.238(a)(b) §27.53(h)	RSS-139, Issue 3 Chapt. 6.6 (i) (ii)	--	--	--	Remark *1)
38	Frequency stability		§2.1055(a)(2) §22.355	RSS-132, Issue 3: Chapter 5.3	<b>FCC/ISED:</b> < ±2.5ppm	--	--	Remark *1)
			table C-1 §24.235	RSS-133, Issue 6: Chapter 6.3	<b>FCC/ISED:</b> fundamental emissions stay within the authorized bands  <b>ISED:</b> < ±2.5ppm			
			§27.54	RSS-139, Issue 3: Chapter 6.4	<b>FCC/ISED:</b> fundamental emissions stay within the authorized bands			

Remarks:

1. Please refer to modular test reports of FCC-ID: QIPALS3-USR3

## 1.2. RX mode, tests overview according FCC Part 15B and Canadian RSS Standards

No. of Diagram group	Test case	Port	References & Limits			EUT set-up	EUT op-mode	Result
			FCC Standard	RSS Section	Test limit			
1	AC-Power Lines conducted Emissions	AC-Power lines	§15.107 §15.207	RSS-Gen, Issue 5: Chapter 8.8	FCC §15.107 class B limits §15.207 limits  RSS-Gen: Table 3			N/A Remark 3
3	Receiver radiated emissions	Cabinet + Interconnecting cables	§15.109 §15.33 §15.35	RSS-132, Issue 3: 6.6 RSS-Gen, Issue 5: 5.3 RSS 133, Issue 6: 6.6	FCC 15.109 class B limits  RSS-Gen: Chapter 5.3+Chapter 7.1.2	--	--	Passed Remark 2
50	Receiver conducted Emissions	Antenna terminal	§2.1051	RSS-Gen: 7.1.3 RSS-132: 5.6 RSS-133: 6.6	ISED: < 2 nW (f< 1 GHz) < 5 nW (f> 1 GHz)	--	--	Remark 1

### Remarks:

- 1.) Please refer to modular test reports of FCC-ID: QIPALS3-USR3
- 2.) See separate test report no. CETECOM\_TR17\_1\_022101T22a for measurements according Part 15, Subpart B
- 3.) not applicable since car-environment

## 1.3. Attestation:

I declare that all measurements were performed by me or under my supervision and that all measurements have been performed and are correct to my best knowledge and belief to Industry Canada standards. All requirements as shown in above table are met in accordance with enumerated standards.

The current version of the Test Report CETECOM\_TR17-1-0221001T19a-C1 replaces the test report CETECOM\_TR17-1-0221001T19a dated 2018-10-01. The replaced test report is herewith invalid.

.....  
Dipl.-Ing. Niels Jeß  
Responsible for test section

.....  
B.Sc. Mohamed Ahmed  
Responsible for test report

## 2. Administrative Data

### 2.1. Identification of the testing laboratory

Company name:	CETECOM GmbH
Address:	Im Teelbruch 116 45219 Essen - Kettwig Germany
Responsible for testing laboratory:	Dipl.-Ing. Niels Jeß

### 2.2. Test location

#### 2.2.1. Test laboratory "CTC"

Company name:	see chapter 2.1. Identification of the testing laboratory
---------------	---

### 2.3. Organizational items

Responsible for test report:	B.Sc. Mohamed Ahmed
Project leader:	B.Sc. Al-Amin Hossain
Receipt of EUT:	2018-05-18
Date(s) of test:	2018-05-29 to 2018-06-20
Date of report:	2019-01-02
-----	
Version of template:	13.02

### 2.4. Applicant's details

Applicant's name:	Actia Nordic AB
Address:	Hammarbacken 4A, 3tr SE-19149 Sollentuna Sweden
Contact person:	Mr. Nicklas Andersson

### 2.5. Manufacturer's details

Manufacturer's name:	please see applicant's details
Address:	please see applicant's details

### 3. Equipment under test (EUT)

#### 3.1. TECHNICAL W-CDMA DATA OF MAIN EUT DECLARED BY APPLICANT

TX-frequency range	<input checked="" type="checkbox"/> FDD Band 2: 1852.4–1907.6 MHz (Uplink), 1930-1990 MHz (Downlink) <input checked="" type="checkbox"/> FDD Band 4: 1712.4–1752.6 MHz (Uplink), 2110-2155 MHz (Downlink) <input checked="" type="checkbox"/> FDD Band 5: 826.4-846.6 MHz (Uplink), 869-894 MHz (Downlink)
Type of modulation	<input checked="" type="checkbox"/> FDD-Mode Release99: QPSK <input checked="" type="checkbox"/> FDD Mode Release 5+6: 16QAM additional
Number of channels	<input checked="" type="checkbox"/> FDD Band 2: UARFCN range 9262 – 9400 – 9538 <input checked="" type="checkbox"/> FDD Band 4: UARFCN range 1312 – 1450 – 1513 <input checked="" type="checkbox"/> FDD Band 5: UARFCN range 4132 – 4185 – 4233
UMTS-HSPA connectivity	<input checked="" type="checkbox"/> Uplink speed: 5.76 Mb/s (category 6) <input type="checkbox"/> Uplink speed:
Emission designator(s)	FDD Band 2: <b>4M16F9W</b> FDD Band 4: <b>4M13F9W</b> FDD Band 5: <b>4M13F9W</b>  See initial certification of the module: <a href="https://apps.fcc.gov/oetcf/tcb/reports/Tcb731Grant-Form.cfm?mode=COPY&amp;RequestTimeout=500&amp;tcb_code=&amp;application_id=N1R4OGyLaKCotEhafTuv1g%3D%3D&amp;fcc_id=QIPALS3-USR3">https://apps.fcc.gov/oetcf/tcb/reports/Tcb731Grant-Form.cfm?mode=COPY&amp;RequestTimeout=500&amp;tcb_code=&amp;application_id=N1R4OGyLaKCotEhafTuv1g%3D%3D&amp;fcc_id=QIPALS3-USR3</a>
Antenna Type	<input checked="" type="checkbox"/> Integrated (enclosure) <input type="checkbox"/> External - dedicated, no RF- connector <input checked="" type="checkbox"/> External, separate RF-connector
Internal Loss to Cellular Module to Antenna Feed Point	Lower Band(f<1GHz): 0.8 dB Higher Band(f>1GHz): >UMTS_FDD_2 = 1.2 dB >UMTS_FDD_4 = 1.2 dB
Cable Loss between Wireless Module and Antenna(Length_2.5meter)	Lower Band(f<1GHz): 1.8 dB Higher Band(f>1GHz): >UMTS_FDD_2 = 3.0 dB >UMTS_FDD_4 = 3.0 dB
Antenna Gain Tx <sup>*1)</sup>	Internal/Backup Antenna Lower Band(f<1GHz): -2.9dBi = -5.05dBd Higher Band(f>1GHz): 2.5 dBi  External Antenna Lower Band(f<1GHz): max 4dBi = max 1.85dBd Higher Band(f>1GHz): >UMTS_FDD_2 = 5.5 dBi >UMTS_FDD_4 = 5.0 dBi

Max. Output Power: Conducted FDD-Mode 2 Conducted FDD-Mode 4 Conducted FDD-Mode 5	22.9dBm (AV) 23.8dBm (AV) 23.5dBm (AV)
Peak EIRP (External Antenna) : Conducted FDD-Mode 2 Conducted FDD-Mode 4 Conducted FDD-Mode 5	= Peak Max Output Power + Antenna Gain - pathloss 22.9dBm + 5.5dBi - 4.2 dB= 24.2dBm 23.8dBm + 5.0dBi - 4.2 dB = 24.6dBm 23.5dBm + 4.0dBi - 2.6 dB= 24.9dBm
Peak EIRP (Internal Antenna): Conducted FDD-Mode 2 Conducted FDD-Mode 4 Conducted FDD-Mode 5	= Peak Max Output Power + Antenna Gain - pathloss 22.9dBm +2.5dBi – 1.2dB= 24.2 dBm 23.8dBm + 2.5dBi – 1.2 dB = 25.1dBm 23.5dBm – 2.9dBi – 0.8 dB= 19.8dBm
Peak ERP: External Antenna Conducted FDD-Mode 2 Conducted FDD-Mode 4 Conducted FDD-Mode 5	= Peak EIRP – 2.15dB 24.2 dBm – 2.15dBi = 22.05 dBm 24.6dBm – 2.15dBi = 22.45 dBm 24.9dBm – 2.15dBi = 22.75 dBm
Peak ERP: Internal Antenna Conducted FDD-Mode 2 Conducted FDD-Mode 4 Conducted FDD-Mode 5	= Peak EIRP – 2.15dB 22.2 dBm – 2.15dB= 20.05dBm 25.1dBm – 2.15dB=22.95dBm 19.8dBm – 2.15dB=17.65dBm

Installed option	<input checked="" type="checkbox"/> GSM 850 and GSM 1900 Bands (Please see in another report) <input checked="" type="checkbox"/> GSM 900 and GSM 1800 Bands (not usable in USA/Canada)  <input checked="" type="checkbox"/> W-CDMA Band II, IV and Band V (Please see in another report) <input checked="" type="checkbox"/> W-CDMA Band I, III and Band VIII (not usable in USA/Canada)  <input checked="" type="checkbox"/> LTE Band II, IV, V and Band XVII (Please see in another report) <input checked="" type="checkbox"/> LTE Band I, III, VII, VIII and Band XX (not usable in USA/Canada) <input checked="" type="checkbox"/> BT, WLAN_2G4_5G (Please see in another report) <input checked="" type="checkbox"/> GNSS (Please see in another report)		
Power supply	<input checked="" type="checkbox"/> DC power only: 13.8V DC		
Special EMI components	--		
Does EUT contain devices susceptible to magnetic fields, e.g. Hall elements, electro-dynamics micro-phones, etc.?	<input type="checkbox"/> yes <input checked="" type="checkbox"/> no		
EUT sample type	<input type="checkbox"/> Production	<input checked="" type="checkbox"/> Pre-Production	<input type="checkbox"/> Engineering
FCC label attached	<input type="checkbox"/> yes	<input checked="" type="checkbox"/> no	

Remark: please refer to antenna data sheet



### 3.2. EUT: Type, S/N etc. and short descriptions used in this test report

Short description*)	EUT	Type	S/N serial number	HW hardware status	SW software status
EUT A	ACUII-06	Telematic Device	30207090/22726872 069718	H2	14
EUT B	VOLVO	Antenna + Supply Cable	434-WLAN-GNSS-SDARSLTE 50751424	NAS version	--
EUT C	ACUII-06	Telematic Device	30207085	H2	14

\*) EUT short description is used to simplify the identification of the EUT in this test report.

### 3.3. Auxiliary Equipment (AE): Type, S/N etc. and short descriptions

AE short description *)	Auxiliary Equipment	Type	S/N serial number	HW hardware status	SW software status
AE 1	Main Harness External with SIM card Holder attached	--	0034	--	--
AE 2	DLC Ethernet cable	--	--	--	--
AE 3	ThinkPad USB 3.0 Ethernet Adapter	LENOVO	DL602XPL	--	--
AE 4	WLAN antenna cable	Fakra	--	--	--
AE 5	GNSS antenna cable	Fakra	--	--	--
AE 6	2G/3G/4G antenna cable	Fakra	--	--	--
AE 7	Termination for IHU Ethernet connector	--	--	--	--

\*) AE short description is used to simplify the identification of the auxiliary equipment in this test report.

### 3.4. EUT set-ups

EUT set-up no.*)	Combination of EUT and AE	Remarks
set. 1	EUT A + EUT B + AE 1 + AE 2 + AE 3 + AE 4 + AE 5 + AE 6 + AE 7	Used for radiated measurements of the External Antenna
set. 2	EUT A + EUT B + AE 1 + AE 2 + AE 3 + AE 4 + AE 5 + AE 6 + AE 7	Used for radiated measurements of the Internal Antenna (Internal Antenna activated from ACUII Certification Test Software)
set. 3	EUT C + AE 1 + AE 6	Used for conducted RF-measurements

\*) EUT set-up no. is used to simplify the identification of the EUT set-up in this test report.

### 3.5. EUT operating modes

EUT operating mode no.*)	Description of operating modes	Additional information
op. 1	FDD-Band 2 12.2 kbps RMC	A communication link is established between the mobile station (UE) and the test simulator. The transmitter is operated on its maximum rated output power class: 21 dBm or 24dBm nominal. The input signal to the receiver is modulated with normal test modulation. The wanted RF input signal level to the receiver of the mobile station is set to a level to provide a stable communication link according Table E5.1/Table E5.1A as described in 3GPP TS34.121, Annex E.
op. 2	FDD-Band 4 12.2 kbps RMC	A communication link is established between the mobile station (UE) and the test simulator. The transmitter is operated on its maximum rated output power class: 21 dBm or 24dBm nominal. The input signal to the receiver is modulated with normal test modulation. The wanted RF input signal level to the receiver of the mobile station is set to a level to provide a stable communication link according Table E5.1/Table E5.1A as described in 3GPP TS34.121, Annex E.
op. 3	FDD-Band 5 12.2 kbps RMC	A communication link is established between the mobile station (UE) and the test simulator. The transmitter is operated on its maximum rated output power class: 21 dBm or 24dBm nominal. The input signal to the receiver is modulated with normal test modulation. The wanted RF input signal level to the receiver of the mobile station is set to a level to provide a stable communication link according Table E5.1/Table E5.1A as described in 3GPP TS34.121, Annex E.

\*) EUT operating mode no. is used to simplify the test report.


## 4. Description of test system set-up's

### 4.1. Test system set-up for conducted measurements on antenna port

#### Cellular Conducted RF-Setup 2 (Cel-2 Set-up)

**Tests Specification:** Conducted Carrier power, Frequency Error

**Schematic:** Following modified test set-up apply for tests performed inside the climatic chamber (frequency stability) or conducted RF-carrier power-measurement. The EUT RF-Signal is directly connected over suitable RF-connector over low-loss cable and an attenuator (2) to the cellular radio communication test-unit. (5)

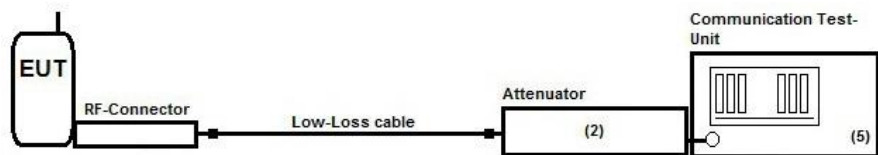

**Testing method:** ANSI C63.10:2013, KDB 971168 D01 v03r01

Used Equipment	Passive Elements	Test Equipment	Remark:
	<input checked="" type="checkbox"/> 10 dB Attenuator (#613)	<input checked="" type="checkbox"/> CMU200 Communication Test-Unit for GSM/W-CDMA	See List of equipment under each test case and chapter 5.7 for calibration info
	<input checked="" type="checkbox"/> Low loss RF-cables	<input checked="" type="checkbox"/> DC-Power Supply	

**Measurement uncertainty** See chapter Measurement Uncertainties (Cel-2)


## 4.2. Test system set-up for radiated magnetic field measurements below 30 MHz

**Specification:** ANSI C63.10-2013 chapter 6.4 (§6.4.4.2)

**General Description:** Evaluating the radiated field emissions are done first by an exploratory emission measurement and a final measurement for most critical frequencies determined.

The loop antenna was placed at 1 m height above ground plane and 3 m measurement distance from set-up for investigations. Because of reduced measurement distance, correction data were applied, as stated in chapter “General Limit - Radiated field strength emissions below 30 MHz“. The tests are performed in the semi anechoic room recognized by the regulatory commission.

**Schematic:**

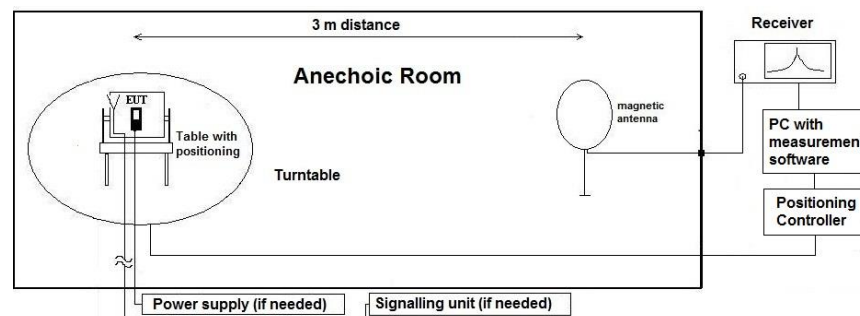

**Testing method:**

### Exploratory, preliminary measurement

The EUT and its associated accessories are placed on a non-conductive position manipulator (tipping device) of 0.8 m height which is placed on the turntable. By rotating the turntable (step 90°, range 0° to 360°) and the EUT itself either on 3-orthogonal axis (portable equipment) or 2-orthogonal axis (defined operational position of EUT), the emission spectrum was recorded. The loop antenna was moved at least to 2-perpendicular axes (antenna vector in direction of EUT and parallel to EUT) in order to maximize the emissions. The results are documented in a diagram. Critical frequencies (low margin to limit) are saved within a data reduction table for further investigations. If various operating modes are supported, further investigations are made to find the worst-case. Also the interconnection cables and equipment position were varied in order to maximize the emissions.

### Final measurement on critical frequencies

Based on the exploratory measurements, the most critical frequencies are re-measured by maintaining the EUT's worst-case operation mode, cable position, etc.

First a frequency zoom around the critical frequency is done to locate the frequency more precisely. After this step, for all identified critical frequencies, the maximum peak was determined.

Following parameters were varied: the turntable angle continuously in the range 0 to 360 degree, the EUT itself either over 3-orthogonal axis (not defined usage position) or 2-orthogonal axis (defined usage position).

On the determined worst-case position, a final measurement with necessary bandwidth and detector according standard has been carried out.

**Formula:**

$$E_C = E_R + AF + C_L + D_F - G_A$$

$$M = L_T - E_C$$

AF = Antenna factor

C<sub>L</sub> = Cable loss

D<sub>F</sub> = Distance correction factor

E<sub>C</sub> = Electrical field – corrected value

E<sub>R</sub> = Receiver reading

G<sub>A</sub> = Gain of pre-amplifier (if used)

L<sub>T</sub> = Limit

M = Margin

All units are dB-units, positive margin means value is below limit.

**Distance correction:**

Reference for applied correction (extrapolating) factors due to reduced measurement distance:


ANSI C63.10:2013, §6.4.4.2 - Equations (2) + (3) + (4)

### 4.3. Test system set-up for radiated spurious emission measurements

**Specification:** ANSI C63.4-2014 chapter 8.3, ANSI C63.10-2013 chapter 6.6.3.3 & 6.6.4

**General Description:** Evaluating the emissions have to be done first by an exploratory emissions measurement and a final measurement for most critical frequencies. The tests are performed in a CISPR 16-1-4:2010 compliant fully anechoic room (FAR) recognized by the regulatory commission. The measurement distance was set to 3 meter for frequencies up to 18 GHz and 2 meter above 18 GHz. A logarithmic periodic antenna is used for the frequency range 30 MHz to 1 GHz. Horn antennas are used for frequency range 1 GHz to 40 GHz. The EUT is aligned within 3 dB beam width of the measurement antenna with three orthogonal axis measurements on the EUT.

**Schematic:**

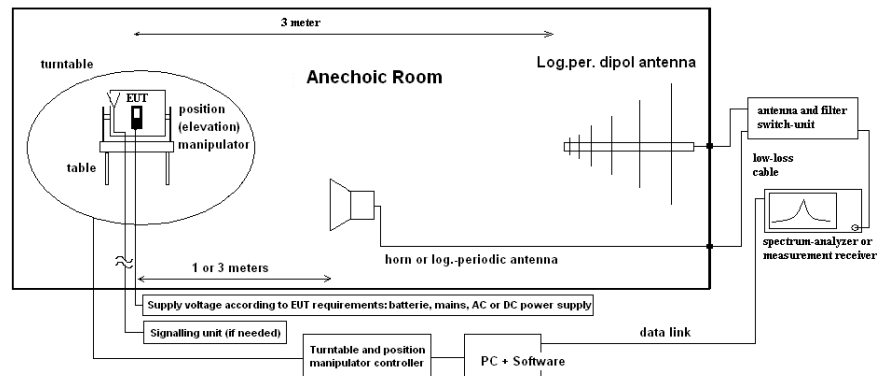

**Testing method:**

**Exploratory, preliminary measurements**

The EUT and its associated accessories are placed on a non-conductive position manipulator (tipping device) of 1.50 m height which is placed on the turntable. By rotating the turntable (range 0° to 360°, step 45°) and the EUT itself on 3-orthogonal axis (the emission spectrum and its characteristics was recorded with an EMI-receiver, broadband antenna and software.

The measurements are performed in horizontal and vertical polarization of the measurement antennas. The results are documented in a diagram. Critical frequencies (low margin to limit) are saved within a table for further investigations. If various operating modes are supported, further investigations are made to find the worst-case of them. Also the interconnection cables and equipment position were varied in order to maximize the emissions.

**Final measurement on critical frequencies**

Based on the exploratory measurements, the most critical frequencies are re-measured by maintaining the EUT's worst-case operation mode, cable position, etc.

First a frequency zoom around the critical frequency is done to locate the frequency more precisely. After this step, for all identified critical frequencies, the maximum peak was determined.

Following parameters were varied: the turntable angle continuously in the range 0 to 360 degree, the EUT itself over 3-orthogonal axis and the height for EUT with large dimensions.

On the determined worst-case position, a final measurement with necessary bandwidth and detector according standard has been carried out.

The readings on the spectrum analyzer are corrected with conversion value between field strength and E(I)RP, so the readings shown are equivalent to ERP/EIRP values. Critical measurements near the limit are re-measured with a substitution method accord. ANSI/TIA/EIA 603 C/D

**Formula:**

$$E_C = E_R + AF + C_L + D_F - G_A \quad (1)$$

$$E_{CE(I)RP} = E_C - 95.2 \text{ dB}$$

$$M = L_T - E_{CE(I)RP}$$

$E_C$  = Electrical field – corrected value

$E_R$  = Receiver reading

$M$  = Margin

$L_T$  = Limit

$AF$  = Antenna factor

$C_L$  = Cable loss

$D_F$  = Distance correction factor (if used)

$G_A$  = Gain of pre-amplifier (if used)

$E_{CE(I)RP}$  = Electrical field corrected for E(I)RP

All units are dB-units, positive margin means value is below limit.

## 5. Measurements

### 5.1. RF-Parameter - RF Peak power output conducted and PAPR-Value

#### 5.1.1. Test location and equipments (for reference numbers please see chapter 'List of test equipment')

test location	<input checked="" type="checkbox"/> CETECOM Essen (Chapter. 2.2.1)	<input type="checkbox"/> Please see Chapter. 2.2.2				
test site	<input type="checkbox"/> 347 Radio.lab. 1	<input checked="" type="checkbox"/> Radio.lab. 2				
spectr. analys.	<input type="checkbox"/> 584 FSU	<input type="checkbox"/> 489 ESU 40	<input type="checkbox"/> 264 FSEK	<input type="checkbox"/> 620 ESU 26		
signaling	<input type="checkbox"/> 392 MT8820A	<input checked="" type="checkbox"/> 436 CMU	<input type="checkbox"/> 547 CMU			
otherwise	<input type="checkbox"/> 400 FTC40x15E	<input type="checkbox"/> 401 FTC40x15E	<input type="checkbox"/> 110 USB LWL	<input type="checkbox"/> 482 Filter Matrix	<input type="checkbox"/> 378 RadiSense	
DC power	<input type="checkbox"/> 611 E3636A	<input type="checkbox"/> 463 HP3245A	<input type="checkbox"/> 459 EA 2032-50	<input type="checkbox"/> 268 EA- 3050	<input checked="" type="checkbox"/> 494 AG6632A	<input type="checkbox"/> 498 NGPE 40
otherwise	<input type="checkbox"/> 331 HC 4055	<input type="checkbox"/> 248 6 dB Att.	<input type="checkbox"/> 529 Power div.	<input type="checkbox"/> - cable OTA20		
line voltage	<input type="checkbox"/> 230 V 50 Hz via public mains		<input checked="" type="checkbox"/> 13.8V DC			

#### 5.1.2. Requirements and limits

<b>FCC</b>	<input checked="" type="checkbox"/> §2.1046 <input checked="" type="checkbox"/> §22.913(a)(2) <input checked="" type="checkbox"/> § 24.232(c) <input checked="" type="checkbox"/> § 27.50(d)(4)
<b>ISED</b>	<input checked="" type="checkbox"/> RSS-132, Issue 3: 5.4 + SRSP 503:5.1.3 <input checked="" type="checkbox"/> RSS-133, Issue 6: 4.1/6.4 + SRSP-510:5.1.2 <input checked="" type="checkbox"/> RSS-139, Issue 3: 6.5
<b>ANSI</b>	C63.26-2015
<b>KDB</b>	971168 D01 v03r01, April 2018
<b>Limits</b>	Maximum Power Output of the wireless device should be determined while measured radiated E(IRP)
	<input checked="" type="checkbox"/> Limit FDD Band 5: 7 Watt ERP (38.4 dBm)
	<input checked="" type="checkbox"/> Limit FDD Band 2: 2 Watt EIRP (33.0 dBm)
	<input checked="" type="checkbox"/> Limit FDD Band 4: 1 Watt EIRP (30.0 dBm)
	PAPR ≤ 13dB

#### 5.1.3. Test condition and test set-up

Climatic conditions	Temperature: (22±3°C)	Rel. humidity: (40±20)%
Test system set-up	Please see chapter "Test system set-up for conducted measurements on antenna port" ANRITSU	
Measurement method	<p>The measurements were performed with the integrated power measurement function of the „radio communication tester CMU200 from Rohde&amp;Schwarz company. In this way spectrum-analyzers instrument limitations can be avoided or minimized. Instead, CMU manufacturers declared measurement error can be considered for this measurement.</p> <p>The attenuation (insertion loss) at the RF Inputs/Outputs of CMU were set according the path loss of the test set-up, determined in a step before starting the measurements. A suitable artificial antenna or RF-connector is provided by the applicant in order to perform the conducted measurements. Any data provided with the artificial antenna or connector, have been taken in account in order to correct the measurement data. (typical 0.3dB for attenuation of antenna connector)</p> <p>Peak and Average Values have been recorded for each channel on test set-up Cel-1. The Peak-to-Average-Power Ratio is determined by devices integrated CCDF capability with corresponding settings. (see annex 1 plots)</p>	
EUT settings	<p>A call was established on highest power transmit conditions in GMSK and RMC99 mode.</p> <p>UE is set TX mode, highest transmit power conditions, DTX, MPR or other power saving techniques have been disabled</p> <p>The measurements were made at the low, middle and high carrier frequencies of each of the supported operating band. Choosing three TX-carrier frequencies of the wireless device, should be sufficient to demonstrate compliance.</p>	

### 5.1.4. Measurement Results

#### 5.1.4.1. PAPR-results

According KDB 971168D01 v03r01 two method are allowed.

- Chapter 5.7.2 Subclause 5.2.3.4 of ANSI C63.26-2015 CCDF-Method (0.1% probability)
- Chapter 5.7.3: Subclause 5.6.2 of ANSI C63.26-2015 ( $PAPR_{dB} = P_{PK} |_{dBm \text{ or } dBW} - P_{AVG} |_{dBm \text{ or } dBW}$ )

FDD Band 2								
EUT	Set-up 1, Op. Mode 1							
Test case	Power value [dBm]						Limit	Result
	UARFCN no. 9262		UARFCN no. 9400		UARFCN no. 9538			
	PK	RMS	PK	RMS	PK	RMS	[dBm]	
Release 99 12.2kbps RMC	26.0	22.2	26.4	22.5	25.8	22.3	33	Passed
Peak-to-Average power ratio on 0.1% probability [dB]	3.8		3.9		3.5		13	Passed

Remark: --

FDD Band 4								
EUT	Set-up 1, Op. Mode 2							
Test case	Power value [dBm]						Limit	Result
	UARFCN no. 1312		UARFCN no. 1450		UARFCN no. 1513			
	PK	RMS	PK	RMS	PK	RMS	[dBm]	
Release 99 12.2kbps RMC	26.8	23.3	26.5	22.8	27.2	23.6	33	Passed
Peak-to Average ratio [dB]	3.5		3.7		3.7		13	Passed

Remark: --

FDD Band 5								
EUT	Set-up 1, Op. Mode 3							
Test case	Power value [dBm]						Limit	Result
	UARFCN no. 4132		UARFCN no. 4183		UARFCN no. 4233			
	PK	RMS	PK	RMS	PK	RMS	[dBm]	
Release 99 12.2kbps RMC	26.8	23.2	26.7	23.0	26.9	23.1	33	Passed
Peak-to Average ratio [dB]	3.6		3.7		3.8		13	Passed

Remark: --

## 5.2. General Limit - Radiated field strength emissions below 30 MHz

### 5.2.1. Test location and equipment

test location	<input checked="" type="checkbox"/> CETECOM Essen (Chapter. 2.2.1)	<input type="checkbox"/> Please see Chapter. 2.2.2	<input type="checkbox"/> Please see Chapter. 2.2.3
test site	<input checked="" type="checkbox"/> 441 EMI SAR	<input type="checkbox"/> 487 SAR NSA	<input type="checkbox"/> 347 Radio.lab.
receiver	<input type="checkbox"/> 377 ESCS30	<input checked="" type="checkbox"/> 001 ESS	<input type="checkbox"/>
spectr. analys.	<input type="checkbox"/> 584 FSU	<input type="checkbox"/> 120 FSEM	<input type="checkbox"/> 264 FSEK
antenna	<input type="checkbox"/> 574 BTA-L	<input type="checkbox"/> 133 EMCO3115	<input type="checkbox"/> 302 BBHA9170
signaling	<input type="checkbox"/> 392 MT8820A	<input type="checkbox"/> 371 CBT32	<input checked="" type="checkbox"/> 436 CMU
otherwise	<input type="checkbox"/> 400 FTC40x15E	<input type="checkbox"/> 401 FTC40x15E	<input type="checkbox"/> 110 USB LWL
DC power	<input checked="" type="checkbox"/> 456 EA 3013A	<input type="checkbox"/> 457 EA 3013A	<input type="checkbox"/> 459 EA 2032-50
line voltage	<input type="checkbox"/> 230 V 50 Hz via public mains	<input type="checkbox"/>	<input type="checkbox"/>

### 5.2.2. Requirements

<b>FCC</b>	Part 15, Subpart C, §15.205 & §15.209			
<b>ISED</b>	<input type="checkbox"/> RSS-Gen: Issue 4: §8.9 Table 5 <input checked="" type="checkbox"/> RSS-Gen: Issue 5: §8.9 Table 6			
<b>ANSI</b>	C63.10-2013			
Frequency [MHz]	Field strength limit		Distance [m]	Remarks
	[ $\mu$ V/m]	[dB $\mu$ V/m]		
0.009 – 0.490	2400/f (kHz)	67.6 – 20Log(f) (kHz)	300	Correction factor used due to measurement distance of 3 m
0.490 – 1.705	24000/f (kHz)	87.6 – 20Log(f) (kHz)	30	Correction factor used due to measurement distance of 3 m
1.705 – 30	30	29.5	30	Correction factor used due to measurement distance of 3 m

### 5.2.3. Test condition and test set-up

Signal link to test system (if used):	<input checked="" type="checkbox"/> air link	<input type="checkbox"/> cable connection	<input type="checkbox"/> none
EUT-grounding	<input checked="" type="checkbox"/> none	<input type="checkbox"/> with power supply	<input type="checkbox"/> additional connection
Equipment set up	<input checked="" type="checkbox"/> table top	<input type="checkbox"/> floor standing	
Climatic conditions	Temperature: (22 $\pm$ 3 $^{\circ}$ C)		Rel. humidity: (40 $\pm$ 20)%
EMI-Receiver or Analyzer Settings	Scan data	<input checked="" type="checkbox"/> 9 – 150 kHz RBW/VBW = 200 Hz	Scan step = 80 Hz
	Scan-Mode	<input checked="" type="checkbox"/> 150 kHz – 30 MHz RBW/VBW = 9 kHz	Scan step = 4 kHz
Detector Mode:	<input type="checkbox"/> other:		
Sweep-Time	<input checked="" type="checkbox"/> 6 dB EMI-Receiver Mode <input type="checkbox"/> 3dB Spectrum analyser Mode		
	Peak (pre-measurement) and Quasi-PK/Average (final if applicable)		
	Repetitive-Scan, max-hold		
	Coupled – calibrated display if continuous signal otherwise adapted to EUT’s individual transmission duty-cycle		
General measurement procedures	Please see chapter “Test system set-up radiated magnetic field measurements below 30 MHz”		



### 5.2.4. Measurement Results

The results are presented below in summary form only. For more information please consult the diagrams included in annex 1. A representative choice of operating modes shows compliance.

**Table of measurement results (External Antenna)**

Diagram No.	Carrier Channel		Frequency range	Set-up no.	OP-mode no.	Remark	Used detector			Result
	Range	No.					PK	AV	QP	
2.01a	Mid	9400	9 kHz-30 MHz	1	1	EUT Standing	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	passed
2.01b	Mid	9400	9 kHz-30 MHz	1	1	EUT Laying	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	passed
2.02a	Mid	1450	9 kHz-30 MHz	1	2	EUT Standing	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	passed
2.02b	Mid	1450	9 kHz-30 MHz	1	2	EUT Laying	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	passed
2.03a	Mid	4183	9 kHz-30 MHz	1	3	EUT Standing	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	passed
2.03b	Mid	4183	9 kHz-30 MHz	1	3	EUT Laying	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	passed

**Table of measurement results (Internal Antenna)**

Diagram No.	Carrier Channel		Frequency range	Set-up no.	OP-mode no.	Remark	Used detector			Result
	Range	No.					PK	AV	QP	
2.04a	Mid	9400	9 kHz-30 MHz	2	1	EUT Standing	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	passed
2.04b	Mid	9400	9 kHz-30 MHz	2	1	EUT Laying	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	passed
2.05a	Mid	1450	9 kHz-30 MHz	2	2	EUT Standing	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	passed
2.05b	Mid	1450	9 kHz-30 MHz	2	2	EUT Laying	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	passed
2.06a	Mid	4183	9 kHz-30 MHz	2	3	EUT Standing	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	passed
2.06b	Mid	4183	9 kHz-30 MHz	2	3	EUT Laying	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	passed

**5.2.5. Correction factors due to reduced meas. distance (f< 30 MHz)**

The used correction factors when the measurement distance is reduced compared to regulatory measurement distance, are calculated according Extrapolation formulas valid for EUT's with maximum dimension of 0.625xLambda. Formula 2+3+4 as presented in ANSI C63.10, Chapter 6.4.4 are used for the calculations of proper extrapolation factors.

Frequency Range	f [kHz/MHz]	Lambda [m]	Far-Field Point [m]	Distance Limit accord. 15.209 [m]	1st Condition (d <sub>meas</sub> < D <sub>near-field</sub> )	2te Condition (Limit distance bigger d <sub>near-field</sub> )	Distance Correction accord. Formula
kHz	9,00E+03	33333,33	5305,17	300	fulfilled	not fulfilled	-80,00
	1,00E+04	30000,00	4774,65		fulfilled	not fulfilled	-80,00
	2,00E+04	15000,00	2387,33		fulfilled	not fulfilled	-80,00
	3,00E+04	10000,00	1591,55		fulfilled	not fulfilled	-80,00
	4,00E+04	7500,00	1193,66		fulfilled	not fulfilled	-80,00
	5,00E+04	6000,00	954,93		fulfilled	not fulfilled	-80,00
	6,00E+04	5000,00	795,78		fulfilled	not fulfilled	-80,00
	7,00E+04	4285,71	682,09		fulfilled	not fulfilled	-80,00
	8,00E+04	3750,00	596,83		fulfilled	not fulfilled	-80,00
	9,00E+04	3333,33	530,52		fulfilled	not fulfilled	-80,00
	1,00E+05	3000,00	477,47		fulfilled	not fulfilled	-80,00
	1,25E+05	2400,00	381,97		fulfilled	not fulfilled	-80,00
	2,00E+05	1500,00	238,73		fulfilled	fulfilled	-78,02
	3,00E+05	1000,00	159,16		fulfilled	fulfilled	-74,49
	4,00E+05	750,00	119,37		fulfilled	fulfilled	-72,00
	4,90E+05	612,24	97,44		fulfilled	fulfilled	-70,23
	5,00E+05	600,00	95,49		fulfilled	not fulfilled	-40,00
	6,00E+05	500,00	79,58		fulfilled	not fulfilled	-40,00
7,00E+05	428,57	68,21	fulfilled	not fulfilled	-40,00		
8,00E+05	375,00	59,68	fulfilled	not fulfilled	-40,00		
9,00E+05	333,33	53,05	fulfilled	not fulfilled	-40,00		
MHz	1,00	300,00	47,75	30	fulfilled	not fulfilled	-40,00
	1,59	188,50	30,00		fulfilled	not fulfilled	-40,00
	2,00	150,00	23,87		fulfilled	fulfilled	-38,02
	3,00	100,00	15,92		fulfilled	fulfilled	-34,49
	4,00	75,00	11,94		fulfilled	fulfilled	-32,00
	5,00	60,00	9,55		fulfilled	fulfilled	-30,06
	6,00	50,00	7,96		fulfilled	fulfilled	-28,47
	7,00	42,86	6,82		fulfilled	fulfilled	-27,13
	8,00	37,50	5,97		fulfilled	fulfilled	-25,97
	9,00	33,33	5,31		fulfilled	fulfilled	-24,95
	10,00	30,00	4,77		fulfilled	fulfilled	-24,04
	10,60	28,30	4,50		fulfilled	fulfilled	-23,53
	11,00	27,27	4,34		fulfilled	fulfilled	-23,21
	12,00	25,00	3,98		fulfilled	fulfilled	-22,45
	13,56	22,12	3,52		fulfilled	fulfilled	-21,39
	15,00	20,00	3,18		fulfilled	fulfilled	-20,51
	15,92	18,85	3,00		fulfilled	fulfilled	-20,00
	17,00	17,65	2,81		not fulfilled	fulfilled	-20,00
	18,00	16,67	2,65		not fulfilled	fulfilled	-20,00
	20,00	15,00	2,39		not fulfilled	fulfilled	-20,00
	21,00	14,29	2,27		not fulfilled	fulfilled	-20,00
23,00	13,04	2,08	not fulfilled	fulfilled	-20,00		
25,00	12,00	1,91	not fulfilled	fulfilled	-20,00		
27,00	11,11	1,77	not fulfilled	fulfilled	-20,00		
29,00	10,34	1,65	not fulfilled	fulfilled	-20,00		
30,00	10,00	1,59	not fulfilled	fulfilled	-20,00		

### 5.3. RF-Parameter - Radiated out of Band RF emissions and Band Edge

#### 5.3.1. Test location and equipments (for reference numbers please see chapter 'List of test equipment')

test location	<input checked="" type="checkbox"/> CETECOM Essen (Chapter. 2.2.1)	<input type="checkbox"/> Please see Chapter. 2.2.2	<input type="checkbox"/> Please see Chapter. 2.2.3
test site	<input type="checkbox"/> 441 EMI SAR	<input type="checkbox"/> 487 SAR NSA	<input checked="" type="checkbox"/> 443 FAR
receiver	<input type="checkbox"/> 377 ESCS30	<input type="checkbox"/> 001 ESS	<input type="checkbox"/> 489 ESU 40
spectr. analys.	<input checked="" type="checkbox"/> 584 FSU	<input type="checkbox"/> 120 FSEM	<input type="checkbox"/> 264 FSEK
antenna	<input checked="" type="checkbox"/> 439 HL 562	<input checked="" type="checkbox"/> 549 HL 025	<input type="checkbox"/> 302 BBHA9170
signaling	<input type="checkbox"/> 017 CMD 65	<input type="checkbox"/> 323 CMD 55	<input type="checkbox"/> 340 CMD 55
power supply	<input checked="" type="checkbox"/> 611 E3636A	<input type="checkbox"/> 457 EA 3013A	<input type="checkbox"/> 459 EA 2032-50
otherwise	<input type="checkbox"/> 529 6dB divider	<input type="checkbox"/> 530 6dB Att.	<input type="checkbox"/> 110 USB LWL
line voltage	<input type="checkbox"/> 230 V 50 Hz via public mains	<input checked="" type="checkbox"/> 13.8V DC	

#### 5.3.2. Requirements and limits

<b>FCC</b>	General: §2.1053(a) , §2.1057(a) <input checked="" type="checkbox"/> FDD Band 5: Part 22: §22.917(a)(b) <input checked="" type="checkbox"/> FDD Band 2: Part 24: §24.238(a)(b) <input checked="" type="checkbox"/> FDD Band 4: Part 27: §27.53(h)
<b>ISED</b>	<input checked="" type="checkbox"/> FDD Band 5: RSS-132, Issue 3: 5.5(i)(ii) <input checked="" type="checkbox"/> FDD Band 2: RSS-133, Issue 6: 6.5.1(i)(ii) <input checked="" type="checkbox"/> FDD Band 4: RSS-139, Issue 3: 6.6 (i)(ii)
<b>Limit</b>	„the power of emissions shall be attenuated below the transmitter output power (p) by at least 43+10Log(P) dB“ -> Resulting limits for all power levels of the Mobile Phone: -13dBm

#### 5.3.3. Test condition and test set-up

link to test system (if used):	<input checked="" type="checkbox"/> air link	<input type="checkbox"/> cable connection	<input type="checkbox"/>
EUT-grounding	<input checked="" type="checkbox"/> none	<input type="checkbox"/> with power supply	<input type="checkbox"/> additional connection
Equipment set up	<input checked="" type="checkbox"/> table top	<input type="checkbox"/> floor standing	
Climatic conditions	Temperature: (22±3°C)	Rel. humidity: (40±20)%	
Test system set-up	Please see chapter “Test system set-up for radiated spurious emission measurements up to 20 GHz”		
Measurement method	The spectrum was scanned from 9 kHz to the 10th harmonic of the highest frequency generated within the equipment. A PEAK detector was used except measurements near the Band-Edge where a AVERAGE detector applied for critical measurements.  According chapter 4.2		
EUT settings	A call was established on highest power transmit conditions in RMC99 mode. The measurements were made at the low, middle and high carrier frequencies of each of the supported operating band. Choosing three TX-carrier frequencies of the wireless device, should be sufficient to demonstrate compliance.		

**Spectrum-analyser settings for FDD band 2**

	Start freq. MHz	Stop freq. MHz	R-BW MHz	V-BW MHz	Sweep time sec.	Att. [dB]	Detector
Sweep 1 (subrange 1)	30	1000	1	1	10	10	MaxH-PK
Sweep 1 (subrange 2)	1000	2800	1	1	15	0	MaxH-PK
Sweep 1 (subrange 3)	2800	20000	1	1	60	10	MaxH-PK
Sweep 2a (Band-Edge)	1849	1850	0.05	0.5	30	35	MaxH-PK
Sweep 2b (Band-Edge)	1849	1850			30	35	MaxH-AV
Sweep 3a (Band-Edge)	1910	1911			30	35	MaxH-PK
Sweep 3b (Band-Edge)	1910	1911			30	35	MaxH-AV

**Spectrum-analyser settings for FDD Band 4**

	Start freq. MHz	Stop freq. MHz	R-BW MHz	V-BW MHz	Sweep time sec.	Att.	Detector
Sweep 1 (subrange 1)	30	1000	1	10	10	10	MaxH-PK
Sweep 1 (subrange 2)	1000	2800	1	10	15	0	MaxH-PK
Sweep 1 (subrange 3)	2800	20000	1	10	160	10	MaxH-PK
Sweep 2a (Band-Edge)	1709	1710	0.05	0.5	30	35	MaxH-PK
Sweep 2b (Band-Edge)	1709	1710	0.05	0.5	30	35	MaxH-AV
Sweep 3a (Band-Edge)	1755	1756	0.05	0.5	30	35	MaxH-PK
Sweep 3b (Band-Edge)	1755	1756	0.05	0.5	30	35	MaxH-AV

**Spectrum-analyser settings for FDD Band 5**

	Start freq. MHz	Stop freq. MHz	R-BW MHz	V-BW MHz	Sweep time sec.	Att.	Detector
Sweep 1 (subrange 1)	30	1000	0.1	1	10	10	MaxH-PK
Sweep 1 (subrange 2)	1000	2800	0.1	1	15	0	MaxH-PK
Sweep 1 (subrange 3)	2800	12000	0.1	1	160	10	MaxH-PK
Sweep 2a (Band-Edge)	823	824	0.05	0.5	30	35	MaxH-PK
Sweep 2b (Band-Edge)	823	824			30	35	MaxH-AV
Sweep 3a (Band-Edge)	850	851			30	35	MaxH-PK
Sweep 3b (Band-Edge)	850	851			30	35	MaxH-AV

### 5.3.4. Results

The results are presented below in summary form only. For more information please see each diagram enclosed in annex 1.

#### 5.3.4.1. FDD Band 2: Op. Mode 1, Set-up 1\_with External Antenna

Diagram no.	Carrier Channel		Frequency range	OP-mode no.	Remark	Used detector			Result
	Range	No.				PK	AV	QP	
--			30 MHz to 18 GHz	1	Only worst case Channel was Measured	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	--
9.20a	Low	9262	1849 – 1850 MHz		EUT_Standing Band Edge Compliance	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	passed
9.20b					EUT_Laying Band Edge Compliance	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	passed
8.20a	Middle	9400	30 MHz to 18 GHz		EUT_Standing Carrier visible on diagram. Not relevant for results	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	passed
8.20b					EUT_Laying Carrier visible on diagram. Not relevant for results	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	passed
--			30 MHz to 18 GHz		Only worst case Channel was Measured	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	--
9.21a	High	9538	1910 – 1911 MHz		EUT_Standing Band-Edge compliance:	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	passed
9.21b					EUT_Laying Band-Edge compliance:	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	passed

Remark: --

**5.3.4.2. FDD Band 4: Op. Mode 2, Set-up 1**

Dia-gram no.	Carrier Channel		Frequency range	OP-mode no.	Remark	Used detector			Result
	Range	No.				PK	AV	QP	
--	Low	1312	30 MHz to 18 GHz	2	Only worst case Channel was Measured	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	--
9.40a			EUT_Standing Band Edge Compliance		<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	passed	
9.40b			EUT_Laying Band Edge Compliance		<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	passed	
8.40a	Middle	1450	30 MHz to 18 GHz		EUT_Standing Carrier visible on diagram. Not relevant for results	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	passed
8.40b					EUT_Laying Carrier visible on diagram. Not relevant for results	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	passed
--	High	1513	30 MHz to 18 GHz		Only worst case Channel was Measured	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	--
9.41a			EUT_Standing Band-Edge compliance:		<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	passed	
9.41b			EUT_Laying Band-Edge compliance:		<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	passed	

Remark: --

**5.3.4.3. FDD Band 5: Op. Mode 3, Set-up 1**

Dia-gram no.	Carrier Channel		Frequency range	OP-mode no.	Remark	Used detector			Result
	Range	No.				PK	AV	QP	
--	Low	4132	30 MHz to 9GHz	3	Only worst case Channel was Measured	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	passed
9.50a			EUT_Standing Band Edge Compliance		<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	passed	
9.50b			EUT_Laying Band Edge Compliance		<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	passed	
8.50a	Middle	4183	30 MHz to 9 GHz		EUT_Standing Carrier visible on diagram. Not relevant for results	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	passed
8.50b					EUT_Laying Carrier visible on diagram. Not relevant for results	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	passed
--	High	4233	30 MHz to 9 GHz		Only worst case Channel was Measured	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	--
9.51a			EUT_Standing Band-Edge compliance		<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	passed	
9.51b			EUT_Laying Band-Edge compliance		<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	passed	

Remark: --

### 5.3.5. Internal Antenna: Op. Mode 1, Set-up 2

Worst case Channel was used in Main Antenna. Therefore High or Low Channel was used for Spot checks (only Harmonics) on Backup Antenna

Diagram no.	Carrier Channel		Frequency range	OP-mode no.	Remark	Used detector			Result
	Range	No.				PK	AV	QP	
--			30 MHz to 18 GHz	1	Only worst case Channel was Measured	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	--
9.22a	Low	9262	1849 – 1850 MHz		EUT_Standing Band Edge Compliance	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	passed
9.22b					EUT_Laying Band Edge Compliance	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	passed
8.21a	Middle	9400	30 MHz to 18 GHz		EUT_Standing Carrier visible on diagram. Not relevant for results	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	passed
8.21b					EUT_Laying Carrier visible on diagram. Not relevant for results	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	passed
--			30 MHz to 18 GHz		Only worst case Channel was Measured	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	--
9.23a	High	9538	1910 – 1911 MHz		EUT_Standing Band-Edge compliance:	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	passed
9.23b					EUT_Laying Band-Edge compliance:	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	passed

Remark: --



**5.3.5.1. FDD Band 4: Op. Mode 2, Set-up 1**

Dia-gram no.	Carrier Channel		Frequency range	OP-mode no.	Remark	Used detector			Result
	Range	No.				PK	AV	QP	
--	Low	1312	30 MHz to 18 GHz	2	Only worst case Channel was Measured	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	--
9.42a			EUT_Standing Band Edge Compliance		<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	passed	
9.42b			EUT_Laying Band Edge Compliance		<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	passed	
8.41a	Middle	1450	30 MHz to 18 GHz		EUT_Standing Carrier visible on diagram. Not relevant for results	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	passed
8.41b					EUT_Laying Carrier visible on diagram. Not relevant for results	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	passed
--	High	1513	30 MHz to 18 GHz		Only worst case Channel was Measured	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	--
9.43a			EUT_Standing Band-Edge compliance:		<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	passed	
9.43b			EUT_Laying Band-Edge compliance:		<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	passed	

Remark: --

**5.3.5.2. FDD Band 5: Op. Mode 3, Set-up 1**

Diagram no.	Carrier Channel		Frequency range	OP-mode no.	Remark	Used detector			Result	
	Range	No.				PK	AV	QP		
8.51a	Low	4132	30 MHz to 9GHz	3	EUT_Standing Carrier visible on diagram. Not relevant for results	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	passed	
8.51b					EUT_Laying Carrier visible on diagram. Not relevant for results	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	passed	
9.52a					823 – 824 MHz	EUT_Standing Band Edge Compliance	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	passed
9.52b						EUT_Laying Band Edge Compliance	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	passed
--	Middle	4183	30 MHz to 9 GHz		Only worst case Channel was Measured	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	--	
--					Only worst case Channel was Measured	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	--	
--	High	4233	30 MHz to 9 GHz		Only worst case Channel was Measured	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	--	
9.53a			849 – 850 MHz		EUT_Standing Band-Edge compliance	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	passed	
9.53b					EUT_Laying Band-Edge compliance	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	passed	

Remark: --

### 5.4. Measurement uncertainties

The reported uncertainties are calculated based on the standard uncertainty multiplied with the appropriate coverage factor **k**, such that a confidence level of approximately 95% is achieved.

For uncertainty determination, each component used in the concrete measurement set-up was taken in account and it's contribution to the overall uncertainty according to its statistical distribution calculated.

Following table shows expectable uncertainties for each measurement type performed.

RF-Measurement	Reference	Frequency range	Calculated uncertainty based on a confidence level of 95%						Remarks
Conducted emissions (U <sub>CISPR</sub> )	CISPR 16-2-1	9 kHz - 150 kHz	4.0 dB						-
		150 kHz - 30 MHz	3.6 dB						
Radiated emissions En-closure	CISPR 16-2-3	30 MHz - 1 GHz	4.2 dB						E-Field
		1 GHz - 18 GHz	5.1 dB						
Disturbance power	CISPR 16-2-2	30 MHz - 300 MHz	-						-
Power Output radiated	-	30 MHz - 4 GHz	3.17 dB						Substitution method
Power Output conducted	-	Set-up No.	Cel-C1	Cel-C2	BT1	W1	W2	--	-
		9 kHz - 12.75 GHz	N/A	0.60	0.7	0.25	N/A	--	
		12.75 - 26.5GHz	N/A	0.82	--	N/A	N/A	--	
Conducted emissions on RF-port	-	9 kHz - 2.8 GHz	0.70	N/A	0.70	N/A	0.69	--	N/A - not applicable
		2.8 GHz - 12.75GHz	1.48	N/A	1.51	N/A	1.43	--	
		12.75 GHz - 18GHz	1.81	N/A	1.83	N/A	1.77	--	
		18 GHz - 26.5GHz	1.83	N/A	1.85	N/A	1.79	--	
Occupied bandwidth	-	9 kHz - 4 GHz	0.1272 ppm (Delta Marker)						Frequency error
			1.0 dB						Power
Emission bandwidth	-	9 kHz - 4 GHz	0.1272 ppm (Delta Marker)						Frequency error
			See above: 0.70 dB						Power
Frequency stability	-	9 kHz - 20 GHz	0.0636 ppm						-
Radiated emissions En-closure	-	150 kHz - 30 MHz	5.0 dB						Magnetic field E-field Substitution
		30 MHz - 1 GHz	4.2 dB						
		1 GHz - 20 GHz	3.17 dB						

**Table: measurement uncertainties, valid for conducted/radiated measurements**

## 6. Abbreviations used in this report

The abbreviations	
ANSI	American National Standards Institute
AV , AVG, CAV	Average detector
EIRP	Equivalent isotropically radiated power, determined within a separate measurement
EGPRS	Enhanced General Packet Radio Service
EUT	Equipment Under Test
FCC	Federal Communications Commission, USA
IC	Industry Canada
n.a.	not applicable
Op-Mode	Operating mode of the equipment
PK	Peak
RBW	resolution bandwidth
RF	Radio frequency
RSS	Radio Standards Specification, Dokuments from Industry Canada
Rx	Receiver
TCH	Traffic channel
Tx	Transmitter
QP	Quasi peak detector
VBW	Video bandwidth
ERP	Effective radiated power

## 7. Accreditation details of CETECOM's laboratories and test sites

Ref.-No.	Accreditation Certificate	Valid for laboratory area or test site	Accreditation Body
-	D-PL-12047-01-01	All laboratories and test sites of CETECOM GmbH, Essen	DAkKS, Deutsche Akkreditierungsstelle GmbH
337 487 558 348 348	736496	Radiated Measurements 30 MHz to 1 GHz, 3 m / 10 m (OATS) Radiated Measurements 30 MHz to 1 GHz, 3 m (SAR) Radiated Measurements above 1 GHz, 3 m (FAR) Mains Ports Conducted Interference Measurements Telecommunication Ports Conducted Interference Measurment.	FCC, Federal Communications Commission Laboratory Division, USA (MRA US-EU 0003)
337 487 550 558	3462D-1 3462D-2 3462D-2 3462D-3	Radiated Measurements 30 MHz to 1 GHz, 3 m / 10 m (OATS) Radiated Measurements 30 MHz to 1 GHz, 3 m (SAR) Radiated Measurements 1 GHz to 6 GHz, 3 m (SAR) Radiated Measurements above 1 GHz, 3 m (FAR)	ISED, Industry Canada Certification and Engineering Bureau
487 550 348 348	R-2666 G-301 C-2914 T-1967	Radiated Measurements 30 MHz to 1 GHz, 3 m (SAR) Radiated Measurements 1 GHz to 6 GHz, 3 m (SAR) Mains Ports Conducted Interference Measurements Telecommunication Ports Conducted Interference Measurment.	VCCI, Voluntary Control Council for Interference by Information Technology Equipment, Japan

OATS = Open Area Test Site, SAR = Semi Anechoic Room, FAR = Fully Anechoic Room

## 8. Instruments and Ancillary

### 8.1. Used equipment “CTC”

The “Ref.-No” in the left column of the following tables allows the clear identification of the laboratory equipment.

#### 8.1.1. Test software and firmware of equipment

Ref.-No.	Equipment	Type	Serial-No.	Version of Firmware or Software during the test
001	EMI Test Receiver	ESS	825132/017	Firm.= 1.21 , OTP=2.0, GRA=2.0
012	Signal Generator (EMS-cond.)	SMY 01	839069/027	Firm.= V 2.02
013	Power Meter (EMS cond.)	NRVD	839111/003	Firm.= V 1.51
017	Digital Radiocommunication Tester	CMD 60 M	844365/014	Firmware = V 3.52 .22.01.99, DECT = D2.87 13.01.99
119	RT Harmonics Analyzer dig. Flickermeter	B10	G60547	Firm.= V 3.1DHG
261	Thermal Power Sensor	NRV-Z55	825083/0008	EPROM-Datum 02.12.04, SE EE 1 B
262	Power Meter	NRV-S	825770/0010	Firm.= 2.6
263	Signal Generator	SMP 04	826190/0007	Firm.=3.21
295	Racal Digital Radio Test Set	6103	1572	UNIT Firmware= 4.04, SW-Main=4.04, SW-BBP=1.04, SW-DSP=1.02, Hardboot=1.02, Softboot=2.02
298	Univ. Radio Communication Tester	CMU 200	832221/091	R&S Test Firmware =3.53 /3.54 (current Testsoftw. f. all band used
323	Digital Radiocommunication Tester	CMD 55	825878/0034	Firm.= 3.52 .22.01.99
335	CTC-EMS-Conducted	System EMS Conducted	-	EMC 32 V 8.52
340	Digital Radiocommunication Tester	CMD 55	849709/037	Firm.= 3.52 .22.01.99
366	Ultra Compact Simulator	UCS 500 M4	V0531100594	Firm. UCS 500=001925/3.06a02, rc=ISMIEC 4.10
371	Bluetooth Tester	CBT32	100153	CBT V5.30+ SW-Option K55, K57
377	EMI Test Receiver	ESCS 30	100160	Firm.= 2.30, OTP= 02.01, GRA= 02.36
378	Broadband RF Field Monitor	RadiSense III	03D00013SNO-08	Firm.= V.03D13
389	Digital Multimeter	Keithley 2000	0583926	Firm. = A13 (Mainboard) A02 (Display)
392	Radio Communication Tester	MT8820A	6K00000788	Firm.= 4.50 #005, IPL=4.01#001, OS=4.02#001, GSM=4.41#013, W-CDMA= 4.54#004, scenario= 4.52#002
436	Univ. Radio Communication Tester	CMU 200	103083	R&S Test Firmware Base=5.14, Mess-Software= GSM=5.14 WCDMA:5.14 (current Testsoftw. F. all band
441	CTC-SAR-EMI Cable Loss	System EMI field (SAR)	-	EMC 32 Version 8.52
442	CTC-SAR-EMS	System EMS field (SAR)	-	EMC 32 Version 8.40
443	CTC-FAR-EMI-RSE	System CTC-FAR-EMI-RSE	-	Spuri 7.2.5 or EMC 32 Ver. 9.15.00
444	CTC-FAR-EMS field	System-EMS-Field (FAR)	-	EMC 32 Version 9.15.00
460	Univ. Radio Communication Tester	CMU 200	108901	R&S Test Firmware Base=5.14, GSM=5.14 WCDMA=5.14 (current Testsoftw.,f. all band to be used,
489	EMI Test Receiver	ESU40	1000-30	Firmware=4.43 SP3, Bios=V5.1-16-3, Spec. =01.00
491	ESD Simulator dito	ESD dito	dito307022	V 2.30
524	Voltage Drop Simulator	VDS 200	0196-16	Software Nr: 000037 Version V4.20a01
526	Burst Generator	EFT 200 A	0496-06	Software Nr. 000034 Version V2.32
527	Micro Pulse Generator	MPG 200 B	0496-05	Software-Nr. 000030 Version V2.43
528	Load Dump Simulator	LD 200B	0496-06	Software-Nr. 000031 Version V2.35a01
546	Univ. Radio Communication Tester	CMU 200	106436	R&S Test Firmware Base=5.14, GSM=5.14 WCDMA=5.14 (current Testsoftw.,f. all band to be used
547	Univ. Radio Communication Tester	CMU 200	835390/014	R&S Test Firmware Base=V5.1403 (current Testsoftw., f. all band used, GSM = 5.14 WCDMA: = 5.14
584	Spectrum Analyzer	FSU 8	100248	2.82_SP3
597	Univ. Radio Communication Tester	CMU 200	100347	R&S Test Firmware Base=5.01, GSM=5.02 WCDMA= not installed, Mainboard= μP1=V.850
607	Signal Generator	SMR 20	832033/011	V1.25
620	EMI Test Receiver	ESU 26	100362	4.43_SP3
642	Wideband Radio Communication Tester	CMW 500	126089	Setup V03.26, Test programm component V03.02.20
670	Univ. Radio Communication Tester	CMU 200	106833	μP1 =V8.50, Firmware = V.20
689	Vector Signal Generator	SMU200	100970	02.20.360.142
692	Bluetooth Tester	CBT 32	100236	CBT V 5.40, FW: V.2.41 (FPGA Digital, V. 3.09 FPGA RF)

### 8.1.2. Single instruments and test systems

Ref.-No.	Equipment	Type	Serial-No.	Manufacturer	Interval of Calibration	Remark	Cal due
001	EMI Test Receiver	ESS	825132/017	Rohde & Schwarz	12 M	-	16.05.2019
005	AC - LISN (50 Ohm/50µH, test site 1)	ESH2-Z5	861741/005	Rohde & Schwarz	12 M	-	16.05.2019
007	Single-Line V-Network (50 Ohm/5µH)	ESH3-Z6	892563/002	Rohde & Schwarz	12 M	-	16.05.2019
009	Power Meter (EMS-radiated)	NRV	863056/017	Rohde & Schwarz	24 M	-	15.05.2019
016	Line Impedance Simulating Network	Op. 24-D	B6366	Spitzenberger+Spies	36 M	-	30.05.2019
021	Loop Antenna (H-Field)	6502	9206-2770	EMCO	36 M	-	30.06.2021
033	RF-current probe (100kHz-30MHz)	ESH2-Z1	879581/18	Rohde & Schwarz	24 M	-	15.05.2019
057	relay-switch-unit (EMS system)	RSU	494440/002	Rohde & Schwarz	pre-m	1a	
060	power amplifier (DC-2kHz)	PAS 5000	B6363	Spitzenberger+Spies	-	3	
086	DC - power supply, 0 -10 A	LNG 50-10	-	Heinzinger Electronic	pre-m	2	
087	DC - power supply, 0 -5 A	EA-3013 S	-	Elektro Automatik	pre-m	2	
091	USB-LWL-Converter	OLS-1	007/2006	Ing. Büro Scheiba	-	4	
099	passive voltage probe	ESH2-Z3	299.7810.52	Rohde & Schwarz	36 M	-	30.05.2021
100	passive voltage probe	Probe TK 9416	without	Schwarzbeck	36 M	-	30.05.2021
110	USB-LWL-Converter	OLS-1	-	Ing. Büro Scheiba	-	4	
119	RT Harmonics Analyzer dig. Flickermeter	B10	G60547	BOCONSULT	36 M	-	30.05.2019
133	horn antenna 18 GHz (Meas 1)	3115	9012-3629	EMCO	36 M	1c	10.03.2020
134	horn antenna 18 GHz (Subst 2)	3115	9005-3414	EMCO	36 M	-	10.03.2020
248	attenuator	SMA 6dB 2W	-	Radiall	pre-m	2	
249	attenuator	SMA 10dB 10W	-	Radiall	pre-m	2	
252	attenuator	N 6dB 12W	-	Radiall	pre-m	2	
256	attenuator	SMA 3dB 2W	-	Radiall	pre-m	2	
257	hybrid	4031C	04491	Narda	pre-m	2	
260	hybrid coupler	4032C	11342	Narda	pre-m	2	
261	Thermal Power Sensor	NRV-Z55	825083/0008	Rohde & Schwarz	24 M	-	30.05.2020
262	Power Meter	NRV-S	825770/0010	Rohde & Schwarz	24 M	-	30.05.2019
263	Signal Generator	SMP 04	826190/0007	Rohde & Schwarz	36 M	-	30.05.2019
265	peak power sensor	NRV-Z33, Model 04	840414/009	Rohde & Schwarz	24 M	-	30.05.2020
266	Peak Power Sensor	NRV-Z31, Model 04	843383/016	Rohde & Schwarz	24 M	-	30.05.2020
267	notch filter GSM 850	WRCA 800/960-6EEK	9	Wainwright GmbH	pre-m	2	
270	termination	1418 N	BB6935	Weinschel	pre-m	2	
271	termination	1418 N	BE6384	Weinschel	pre-m	2	
272	attenuator (20 dB) 50 W	Model 47	BF6239	Weinschel	pre-m	2	
273	attenuator (10 dB) 100 W	Model 48	BF9229	Weinschel	pre-m	2	
274	attenuator (10 dB) 50 W	Model 47 (10 dB) 50 W	BG0321	Weinschel	pre-m	2	
275	DC-Block	Model 7003 (N)	C5129	Weinschel	pre-m	2	
276	DC-Block	Model 7006 (SMA)	C7061	Weinschel	pre-m	2	
279	power divider	1515 (SMA)	LH855	Weinschel	pre-m	2	
298	Univ. Radio Communication Tester	CMU 200	832221/091	Rohde & Schwarz	pre-m	3	
300	AC LISN (50 Ohm/50µH, 1-phase)	ESH3-Z5	892 239/020	Rohde & Schwarz	12 M	-	17.05.2019
301	attenuator (20 dB) 50W, 18GHz	47-20-33	AW0272	Lucas Weinschel	pre-m	2	
302	horn antenna 40 GHz (Meas 1)	BBHA9170	155	Schwarzbeck	36 M	-	14.03.2020
303	horn antenna 40 GHz (Subst 1)	BBHA9170	156	Schwarzbeck	36 M	-	20.03.2020
331	Climatic Test Chamber -40/+180 Grad	HC 4055	43146	Heraeus Vötsch	24 M	-	30.10.2020
341	Digital Multimeter	Fluke 112	81650455	Fluke	24 M	-	30.05.2020
342	Digital Multimeter	Voltcraft M-4660A	IB 255466	Voltcraft	24 M	-	17.05.2019
347	laboratory site	radio lab.	-	-	-	5	
348	laboratory site	EMI conducted	-	-	-	5	
354	DC - Power Supply 40A	NGPE 40/40	448	Rohde & Schwarz	pre-m	2	
357	power sensor	NRV-Z1	861761/002	Rohde & Schwarz	24 M	-	24.05.2019
371	Bluetooth Tester	CBT32	100153	R&S	36 M	-	30.05.2019
373	Single-Line V-Network (50 Ohm/5µH)	ESH3-Z6	100535	Rohde & Schwarz	12 M	-	17.05.2019
377	EMI Test Receiver	ESCS 30	100160	Rohde & Schwarz	12 M	-	30.05.2019
389	Digital Multimeter	Keithley 2000	0583926	Keithley	pre-m	-	
405	Thermo-/Hygrometer	OPUS 10 THI	126.0604.0003.3.3.3.2 2	LUFFT Mess u. Regel- technik	24 M	-	30.03.2019
431	Model 7405	Near-Field Probe Set	9305-2457	EMCO	-	4	
436	Univ. Radio Communication Tester	CMU 200	103083	Rohde & Schwarz	12 M	-	06.03.2019
439	UltraLog-Antenna	HL 562	100248	Rohde & Schwarz	36 M	-	10.03.2020
454	Oscilloscope	HM 205-3	9210 P 29661	Hameg	-	4	
456	DC-Power supply 0-5 A	EA 3013 S	207810	Elektro Automatik	pre-m	2	
459	DC -Power supply 0-5 A , 0-32 V	EA-PS 2032-50	910722	Elektro Automatik	pre-m	2	
460	Univ. Radio Communication Tester	CMU 200	108901	Rohde & Schwarz	12 M	-	30.05.2019
463	Universal source	HP3245A	2831A03472	Agilent	-	4	
466	Digital Multimeter	Fluke 112	89210157	Fluke USA	24 M	-	30.05.2020
467	Digital Multimeter	Fluke 112	89680306	Fluke USA	36 M	-	30.05.2019
468	Digital Multimeter	Fluke 112	90090455	Fluke USA	36 M	-	30.04.2021

Ref.-No.	Equipment	Type	Serial-No.	Manufacturer	Interval of calibration	Remark	Cal due
477	ReRadiating GPS-System	AS-47	-	Automotive Cons. Fink	-	3	
480	power meter (Fula)	NRVS	838392/031	Rohde & Schwarz	24 M	-	16.05.2019
482	filter matrix	Filter matrix SAR 1	-	CETECOM (Brl)	-	1d	
487	System CTC NSA-Verification SAR-EMI	System EMI field (SAR) NSA	-	ETS Lindgren / CETECOM	24 M	-	31.03.2019
502	band reject filter	WRCG 1709/1786-1699/1796-	SN 9	Wainwright	pre-m	2	
503	band reject filter	WRCG 824/849-814/859-	SN 5	Wainwright	pre-m	2	
517	relais switch matrix	HF Relais Box Keithley	SE 04	Keithley	pre-m	2	
523	Digital Multimeter	L4411A	MY46000154	Agilent	24 M	-	18.05.2019
529	6 dB Broadband resistive power divider	Model 1515	LH 855	Weinschel	pre-m	2	
530	10 dB Broadband resistive power divider	R 416110000	LOT 9828	-	pre-m	2	
436	Univ. Radio Communication Tester	CMU 200	103083	R&S	12 M	-	30.03.2019
549	Log.Per-Antenna	HL025	1000060	Rohde & Schwarz	36/12 M	-	31.07.2021
550	System CTC S-VSWR Verification SAR-EMI	System EMI Field SAR S-VSWR	-	ETS Lindgren/CETECOM	24 M	-	30.03.2019
558	System CTC FAR S-VSWR	System CTC FAR S-VSWR	-	CTC	24 M	-	08.08.2019
574	Biconilog Hybrid Antenna	BTA-L	980026L	Frankonia	36/12 M	-	31.03.2019
584	Spectrum Analyzer	FSU 8	100248	Rohde & Schwarz	pre-m	-	
594	Wideband Radio Communication Tester	CMW 500	101757	Rohde & Schwarz	12 M	-	30.05.2019
597	Univ. Radio Communication Tester	CMU 200	100347	Rohde & Schwarz	pre-m	-	
600	power meter	NRVD (Reserve)	834501/018	Rohde & Schwarz	24 M	-	17.05.2019
601	medium-sensitivity diode sensor	NRV-Z5 (Reserve)	8435323/003	Rohde & Schwarz	24 M	-	15.05.2019
602	peak power sensor	NRV-Z32 (Reserve)	835080	Rohde & Schwarz	24 M	-	
611	DC power supply	E3632A	KR 75305854	Agilent	pre-m	2	
612	DC power supply	E3632A	MY 40001321	Agilent	pre-m	2	
613	Attenuator	R416120000 20dB 10W	Lot. 9828	Radiall	pre-m	2	
616	Digitalmultimeter	Fluke 177	88900339	Fluke	24 M	-	30.05.2020
617	Power Splitter/Combiner	ZFSC-2-2-S+	S F987001108	Mini Circuits	-	2	
618	Power Splitter/Combiner	50PD-634	600994	JFW Industries USA	-	2	
619	Power Splitter/Combiner	50PD-634	600995	JFW Industries, USA	-	3	
620	EMI Test Receiver	ESU 26	100362	Rohde-Schwarz	12 M	-	30.05.2019
621	Step Attenuator 0-139 dB	RSP	100017	Rohde & Schwarz	pre-m	2	
625	Generic Test Load USB	Generic Test Load USB	-	CETECOM	-	2	
627	data logger	OPUS 1	201.0999.9302.6.4.1.4 3	G. Lufft GmbH	24 M	-	30.03.2019
634	Spectrum Analyzer	FSM (HF-Unit)	826188/010	Rohde & Schwarz	pre-m	2	
637	High Speed HDMI with Ethernet 1m	HDMI cable with Ethernet 1m	-	Kogilink	-	2	
638	HDMI Kabel with Ethernet 1,5 m flach	HDMI cable with Ethernet	-	Reichelt	-	2	
640	HDMI cable 2m rund	HDMI cable 2m rund	-	Reichelt	-	2	
641	HDMI cable with Ethernet	Certified HDMI cable with	-	PureLink	-	2	
642	Wideband Radio Communication Tester	CMW 500	126089	Rohde&Schwarz	24 M	-	24.05.2019
644	Amplifierer	ZX60-2534M+	SN865701299	Mini-Circuits	-	-	
670	Univ. Radio Communication Tester	CMU 200	106833	Rohde & Schwarz	24 M	-	30.05.2020
671	DC-power supply 0-5 A	EA-3013S	-	Elektro Automatik	pre-m	2	
678	Power Meter	NRP	101638	Rohde&Schwarz	pre-m	-	
683	Spectrum Analyzer	FSU 26	200571	Rohde & Schwarz	12 M	-	30.05.2019
686	Field Analyzer	EHP-200A	160WX30702	Narda Safety Test Solutions	24 M	-	29.03.2019
687	Signal Generator	SMF 100A	102073	Rohde&Schwarz	12 M	-	30.05.2019
688	Pre Amp	JS-18004000-40-8P	1750117	Miteq	pre-m	-	
690	Spectrum Analyzer	FSU	100302/026	Rohde&Schwarz	24 M	-	16.05.2019
691	OSP120 Base Unit	OSP120	106833	Rohde & Schwarz	12 M	-	30.05.2019
692	Bluetooth Tester	CBT 32	100236	Rohde & Schwarz	36 M	-	29.05.2020
697	Power Splitter	ZN4PD-642W-S+	165001445	Mini-Circuits	-	2	
703	INNCO Antennen Mast	MA 4010-KT080-XPET-ZSS3	MA4170-KT100-XPET-	INNCO	pre-m	-	
704	INNCON Controller	CO 3000-4port	CO3000/933/3841051 6/L	INNCO Systems GmBh	pre-m	-	
711	Harmonic Mixer 90 GHz - 140GHz	RPG FS-Z140	101004	RPG	24 M	-	22.02.2019
712	Harmonic Mixer 75 GHz - 110GHz	FS-Z110	101468	Rohde & Schwarz	24 M	-	22.02.2019
713	Harmonic Mixer, 50 GHz - 75GHz	FS-Z75	101022	Rohde & Schwarz	24 M	-	22.05.2019
714	Signal Analyzer 67GHz	FSW67	104023	Rohde & Schwarz	24 M	-	28.02.2020
715	Harmonic Mixer, 140 GHz - 220GHz	FS-Z220	101009	RPG Radiometer Physics	24 M	-	03.08.2019
716	Harmonic Mixer 220 GHz to 325 GHZ	FS-Z325	101005	RPG Radiometer Physics	24 M	-	13.02.2019
747	Spectrum Analyzer	FSU 26	200152	Rohde & Schwarz	12 M	-	30.05.2019
748	Pickett-Potter Horn Antenna	FH-PP 4060	010001	Radiometer Physicscs	-	-	
749	Pickett-potter Horn Antenna	FH-PP 60-90	010003	Radiometer Physics	-	-	
750	Pickett-Potter Horn Antenna	FH-PP 140-220	010011	Radiometer Physics	-	-	
751	Digital Optical System	optoCAN-FD Transceiver	17-010416	mk-messtechnik GmbH	-	-	

Ref.-No.	Equipment	Type	Serial-No.	Manufacturer	Interval of calibration	Remark	Cal due
752	Digital Optical System	optoCAN-FD Transceiver	17-010083	mk-messtechnik GmbH	-	-	
753	Digital Optical System	optoCAN-FD Transceiver	17-010084	mk-messtechnik GmbH	-	-	
754	Digital Optical System	optoCAN-FD Transceiver	17-010415	mk-messtechnik GmbH	-	-	
755	Digital Optical System	optoLAN-100-MAX	17-010795	mk-messtechnik GmbH	-	-	
701	WIDEBAND RADIO COMMUNICATION	CMW500	158150	Rohde&Schwarz	12 M	-	20.07.2019
758	Signal Generator	SMU 200A	100754	Rohde & Schwarz	24 M	-	11.10.2019
781	Power Supply	PS 2042-10 B	2815450369	Elektro-Automatik GmbH	-	-	
782	Power Supply	PS 2042-10 B	2815450348	lektro-Automatik GmbH &Co.KG	-	-	
783	Spectrum Analyzer	FSU 26	100414	Rohde & Schwarz	12 M	-	30.05.2019
784	Power Supply	NGSM 32/10	00196	Rohde & Schwarz	12 M	-	
785	RSP	RF Step Attenuator	860712/012	Rohde & Schwarz	12 M	-	
786	SAR Probe	ES3DV3	3340	Speag	36 M	-	14.02.2021
787	OSP	OSP B157WX	101264	Rohde & Schwarz	12 M	-	30.05.2019



Note / remarks		Calibrated during system calibration:
	1a	System CTC-SAR-EMS (Ref.-No. 442)
	1b	System-CTC-EMS-Conducted (Ref.-No. 335)
	1c	System CTC-FAR-EMI-RSE (Ref.-No. 443)
	1d	System CTC-SAR-EMI (Ref.-No. 441)
	1e	System CTC-OATS (EMI radiated) (Ref.-No. 337)
	1 f	System CTC-CTIA-OTA (Ref.-No. 420)
	1 g	System CTC-FAR-EMS (Ref.-No. 444)
	2	Calibration or equipment check immediately before measurement
	3	Regulatory maintained equipment for functional check or support purpose
	4	Ancillary equipment without calibration e.g. mechanical equipment or monitoring equipment
	5	Test System

Interval of calibration	12 M	12 month
	24 M	24 month
	36 M	36 month
	24/12 M	Calibration every 24 months, between this every 12 months internal validation
	36/12 M	Calibration every 36 months, between this every 12 months internal validation
	Pre-m	Check before starting the measurement
	-	Without calibration

## 9. Versions of test reports (change history)

Version	Applied changes	Date of release
--	Initial release	2018-10-01
C1	Customer Name updated and 'End of Report' added	2019-01-02

# End of Report