

FCC 47 CFR PART 15 SUBPART C

CERTIFICATION TEST REPORT

For

Electric Jukebox

Model No.: EJ80, EJ81

FCC ID: 2AGKTEJ80

Trademark: Electric Jukebox

REPORT NO.: ES151110025E3

ISSUE DATE: December 14, 2015

Prepared for

MAGIC MEDIA WORKS LIMITED

One West Smithfield London EC1A 9JU UK.

Prepared by

EMTEK (SHENZHEN) CO., LTD.

Bldg 69, Majialong Industry Zone, Nanshan District, Shenzhen,
Guangdong, China
TEL: 86-755-26954280
FAX: 86-755-26954282

TABLE OF CONTENTS

1	TEST RESULT CERTIFICATION	3
2	EUT TECHNICAL DESCRIPTION	4
3	SUMMARY OF TEST RESULT	6
4	TEST METHODOLOGY.....	7
4.1	GENERAL DESCRIPTION OF APPLIED STANDARDS	7
4.2	MEASUREMENT EQUIPMENT USED	7
4.3	DESCRIPTION OF TEST MODES	8
5	FACILITIES AND ACCREDITATIONS	9
5.1	FACILITIES.....	9
5.2	LABORATORY ACCREDITATIONS AND LISTINGS	9
6	TEST SYSTEM UNCERTAINTY	10
7	SETUP OF EQUIPMENT UNDER TEST	11
7.1	RADIO FREQUENCY TEST SETUP 1.....	11
7.2	RADIO FREQUENCY TEST SETUP 2.....	11
7.3	CONDUCTED EMISSION TEST SETUP	12
7.4	SUPPORT EQUIPMENT.....	12
8	TEST REQUIREMENTS	13
8.1	DTS (6DB) BANDWIDTH.....	13
8.2	MAXIMUM PEAK CONDUCTED OUTPUT POWER	20
8.3	MAXIMUM POWER SPECTRAL DENSITY	21
8.4	UNWANTED EMISSIONS INTO NON-RESTRICTED FREQUENCY BANDS	28
8.5	RADIATED SPURIOUS EMISSION	33
8.6	CONDUCTED EMISSION TEST	65
8.7	ANTENNA APPLICATION	70

1 TEST RESULT CERTIFICATION

Applicant:	MAGIC MEDIA WORKS LIMITED One West Smithfield London EC1A 9JU UK.
Manufacturer:	LITE STAR ELECTRONICS TECHNOLOGY CO., LTD. Xingchen Science & Technology Park, Lianbi Road, Wulian Industry Area, Fenggang Town, Dongguan, China.
Product Description:	Electric Jukebox
Model Number:	EJ80, EJ81
File Number:	ES151110025E3
Date of Test:	November 11, 2015 to November 30, 2015

Measurement Procedure Used:

APPLICABLE STANDARDS	
STANDARD	TEST RESULT
FCC 47 CFR Part 2, Subpart J:2014	
FCC 47 CFR Part 15, Subpart C:2014	PASS

The above equipment was tested by EMTEK (SHENZHEN) CO., LTD. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10 (2013) and the energy emitted by the sample EUT tested as described in this report is in compliance with the requirements of FCC Rules Part 2 and Part 15.247

The test results of this report relate only to the tested sample identified in this report.

Date of Test : November 11, 2015 to November 30, 2015

Prepared by :

Jack Li/Editor

Reviewer :

Joe Xia/Supervisor

Approve & Authorized Signer :

Lisa Wang/Manager

2 EUT TECHNICAL DESCRIPTION

Device Type:	Fixed Device
Exposure Category:	Uncontrolled Environment/General Population
Product Name:	Electric Jukebox (Note: The device consists of a TV stick and controller.)
Model Number:	EJ80, EJ81 (Note: These models are identical in circuitry and electrical, mechanical and physical construction; the only differences are the silk-screen, color and model no. for trading purpose. We prepare EJ80 for test. and the worst result recorded in the report.)
TV stick information as below:	
Power supply:	<input checked="" type="checkbox"/> DC supply: DC 5V from AC Adapter
	<input checked="" type="checkbox"/> Adapter supply: Model: TKAC-201-DC Input: AC 100-240V, 50/60Hz, 0.6A Max Output: DC 5V 1.5A Output: USB 5V 0.5A
Operating Mode(s) & Operating Frequency Range(s):	802.11b/g/n(HT20): 2412MHz-2462MHz; 802.11n(HT40): 2422MHz-2452MHz; Bluetooth: 2402-2480MHz;
Test Modulation:	OFDM with BPSK/QPSK/16QAM/64QAM for 802.11g/n HT20/n HT40; DSSS with DBPSK/DQPSK/CCK for 802.11b; GFSK, π/4DQPSK, 8DPSK for Bluetooth4.0 DSS; GFSK for Bluetooth 4.0 DTS;
Number of Channels:	11 Channels for 802.11b/g/n HT20; 7 Channels for 802.11n HT40; 79 Channels for Bluetooth 4.0 DSS; 40 Channels for Bluetooth 4.0 DTS;
Transmit Power Max:	-4.066dBm for Bluetooth DSS; -8.017dBm for Bluetooth DTS; 15.94dBm for 802.11b/g/n;
Type of Antenna:	PCB Antenna
Antenna Gain:	2dBi
Temperature Extreme Range:	0°C ~ +40°C

Note: for more details, please refer to the User's manual of the EUT.

Modified Information

3 SUMMARY OF TEST RESULT

FCC Part Clause	Test Parameter	Verdict	Remark
15.247(a)(2)	DTS (6dB) Bandwidth	PASS	
15.247(b)(3)	Maximum Peak Conducted Output Power	PASS	
15.247(e)	Maximum Power Spectral Density Level	PASS	
15.247(d)	Unwanted Emission Into Non-Restricted Frequency Bands	PASS	
15.247(d) 15.209	Unwanted Emission Into Restricted Frequency Bands	PASS	
15.247(d) 15.209	Radiated Spurious Emission	PASS	
15.207	Conducted Emission Test	PASS	
15.247(b)	Antenna Application	PASS	
NOTE1: N/A (Not Applicable) NOTE2: According to FCC OET KDB 558074, the report use radiated measurements in the restricted frequency bands. In addition, the radiated test is also performed to ensure the emissions emanating from the device cabinet also comply with the applicable limits.			

4 TEST METHODOLOGY

4.1 GENERAL DESCRIPTION OF APPLIED STANDARDS

According to its specifications, the EUT must comply with the requirements of the following standards:

FCC 47 CFR Part 2, Subpart J

FCC 47 CFR Part 15, Subpart C

FCC KDB 558074 D01 DTS Meas Guidance v03r03

FCC KDB 662911 D01 Multiple Transmitter Output v01

FCC KDB 662911 D02 MIMO With Cross Polarized Antenna V01

4.2 MEASUREMENT EQUIPMENT USED

4.2.1 Conducted Emission Test Equipment

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.
Test Receiver	Rohde & Schwarz	ESCS30	828985/018	05/16/2015
L.I.S.N.	Schwarzbeck	NNLK8129	8129203	05/16/2015
50Ω Coaxial Switch	Anritsu	MP59B	M20531	N/A
Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100006	05/16/2015
Voltage Probe	Rohde & Schwarz	TK9416	N/A	05/16/2015
I.S.N	Rohde & Schwarz	ENY22	1109.9508.02	05/16/2015

4.2.2 Radiated Emission Test Equipment

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.
EMI Test Receiver	Rohde & Schwarz	ESU	1302.6005.26	05/16/2015
Pre-Amplifier	HP	8447D	2944A07999	05/16/2015
Bilog Antenna	Schwarzbeck	VULB9163	142	05/16/2015
Loop Antenna	ARA	PLA-1030/B	1029	05/16/2015
Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170399	05/16/2015
Horn Antenna	Schwarzbeck	BBHA 9120	D143	05/16/2015
Cable	Schwarzbeck	AK9513	ACRX1	05/16/2015
Cable	Rosenberger	N/A	FP2RX2	05/16/2015
Cable	Schwarzbeck	AK9513	CRPX1	05/16/2015
Cable	Schwarzbeck	AK9513	CRRX2	05/16/2015

4.2.3 Radio Frequency Test Equipment

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.
Spectrum Analyzer	Agilent	E4407B	88156318	05/16/2015
EMI Test Receiver	Rohde & Schwarz	FSV30	103040	05/16/2015
Signal Analyzer	Agilent	N9010A	My53470879	05/16/2015
Power meter	Anritsu	ML2495A	0824006	05/16/2015
Power sensor	Anritsu	MA2411B	0738172	05/16/2015

Remark: Each piece of equipment is scheduled for calibration once a year.

4.3 DESCRIPTION OF TEST MODES

The EUT has been tested under its typical operating condition.

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

The Transmitter was operated in the normal operating mode. The TX frequency was fixed which was for the purpose of the measurements.

Test of channel included the lowest and middle and highest frequency to perform the test, then record on this report.

Those data rates (802.11b: 1 Mbps; 802.11g: 6 Mbps; 802.11n (HT20): MCS0; 802.11n (HT40): MCS0) were used for all test.

Pre-defined engineering program for regulatory testing used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

All the modulation modes and channels were tested, the data of the worst mode are described in the following pages

Frequency and Channel list for 802.11b/g/n (HT20):

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	5	2432	9	2452
2	2417	6	2437	10	2457
3	2422	7	2442	11	2462
4	2427	8	2447		

Frequency and Channel list for 802.11n (HT40):

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
3	2422	5	2432	8	2447
4	2427	6	2437	9	2452
		7	2442		

Test Frequency and Channel for 802.11b/g/n (HT20):

Lowest Frequency		Middle Frequency		Highest Frequency	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	6	2437	11	2462

Test Frequency and channel for 802.11n (HT40):

Lowest Frequency		Middle Frequency		Highest Frequency	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
3	2422	6	2437	9	2452

5 FACILITIES AND ACCREDITATIONS

5.1 FACILITIES

All measurement facilities used to collect the measurement data are located at

Bldg 69, Majialong Industry Zone District, Nanshan District, Shenzhen, China

The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.10 and CISPR Publication 22.

5.2 LABORATORY ACCREDITATIONS AND LISTINGS

Site Description

EMC Lab. : Accredited by CNAS, 2013.10.29
The certificate is valid until 2016.10.28
The Laboratory has been assessed and proved to be in compliance with CNAS-CL01: 2006(identical to ISO/IEC17025: 2005)
The Certificate Registration Number is L2291

: Accredited by TUV Rheinland Shenzhen, 2015.08.04
The Laboratory has been assessed according to the requirements ISO/IEC 17025.

: Accredited by FCC, July 24, 2013
The Certificate Registration Number is 406365.

: Accredited by FCC, April 17, 2013
The Certificate Registration Number is 709623.

: Accredited by Industry Canada, November 24, 2015
The Certificate Registration Number is 4480A-2

6 TEST SYSTEM UNCERTAINTY

The following measurement uncertainty levels have been estimated for tests performed on the apparatus:


Parameter	Uncertainty
Radio Frequency	$\pm 1 \times 10^{-5}$
Maximum Peak Output Power Test	$\pm 1.0 \text{dB}$
Conducted Emissions Test	$\pm 2.0 \text{dB}$
Radiated Emission Test	$\pm 2.0 \text{dB}$
Power Density	$\pm 2.0 \text{dB}$
Occupied Bandwidth Test	$\pm 1.0 \text{dB}$
Band Edge Test	$\pm 3 \text{dB}$
All emission, radiated	$\pm 3 \text{dB}$
Antenna Port Emission	$\pm 3 \text{dB}$
Temperature	± 0.5
Humidity	$\pm 3\%$

Measurement Uncertainty for a level of Confidence of 95%

7 SETUP OF EQUIPMENT UNDER TEST

7.1 RADIO FREQUENCY TEST SETUP 1

The WLAN component's antenna port(s) of the EUT are connected to the measurement instrument per an appropriate attenuator. The EUT is controlled by PC/software to emit the specified signals for the purpose of measurements.




7.2 RADIO FREQUENCY TEST SETUP 2


The test site semi-anechoic chamber has met the requirement of NSA tolerance 4 dB according to the standards: ANSI C63.10. The test distance is 3m. The setup is according to the requirements in Section 13.1.4.1 of ANSI C63.10-2013 and CAN/CSA-CEI/IEC CISPR 22.

The maximal emission value is acquired by adjusting the antenna height, polarisation and turntable azimuth. Normally, the height range of antenna is 1 m to 4 m, the azimuth range of turntable is 0° to 360°, and the receive antenna has two polarizations Vertical (V) and Horizontal (H).


(a) Radiated Emission Test Set-Up, Frequency Below 30MHz

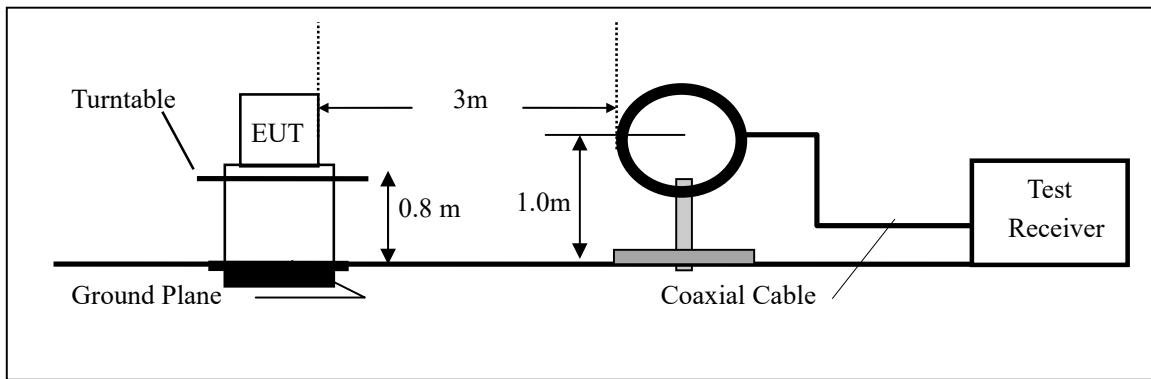

(b) Radiated Emission Test Set-Up, Frequency Below 1000MHz

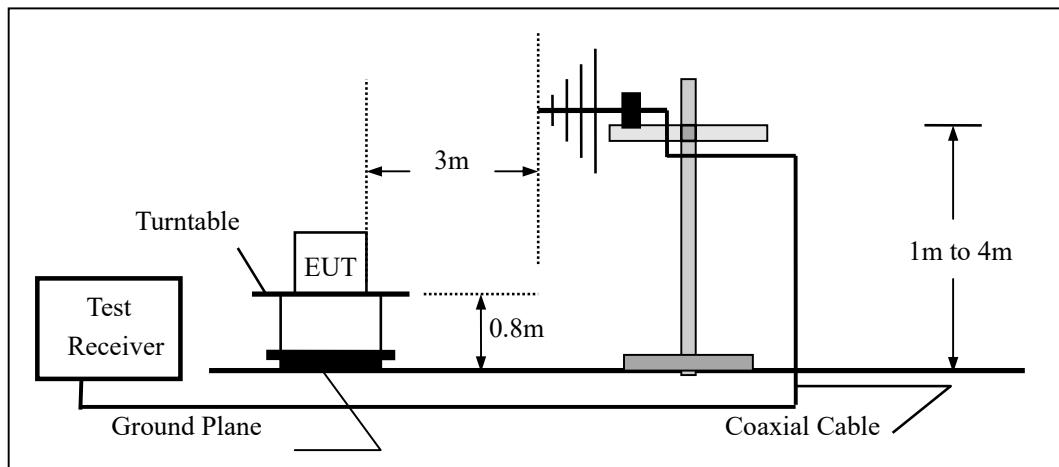

(c) Radiated Emission Test Set-Up, Frequency above 1000MHz

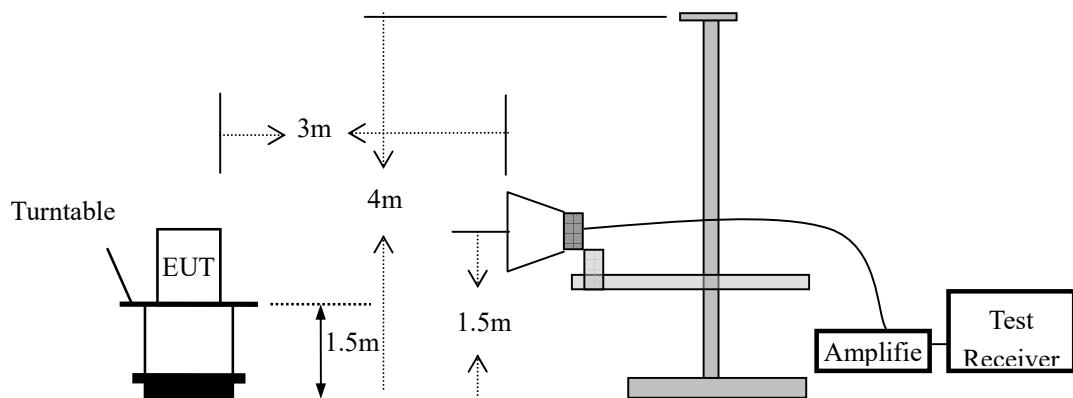


7.3 CONDUCTED EMISSION TEST SETUP

The mains cable of the EUT (Electric Jukebox) must be connected to LISN. The LISN shall be placed 0.8 m from the boundary of EUT and bonded to a ground reference plane for LISN mounted on top of the ground reference plane. This distance is between the closest points of the LISN and the EUT. All other units of the EUT and associated equipment shall be at least 0.8m from the LISN.

Ground connections, where required for safety purposes, shall be connected to the reference ground point of the LISN and, where not otherwise provided or specified by the manufacturer, shall be of same length as the mains cable and run parallel to the mains connection at a separation distance of not more than 0.1 m.

According to the requirements in Section 13.1.4.1 of ANSI C63.10-2013 Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30 MHz using CISPR Quasi-Peak and average detector mode.

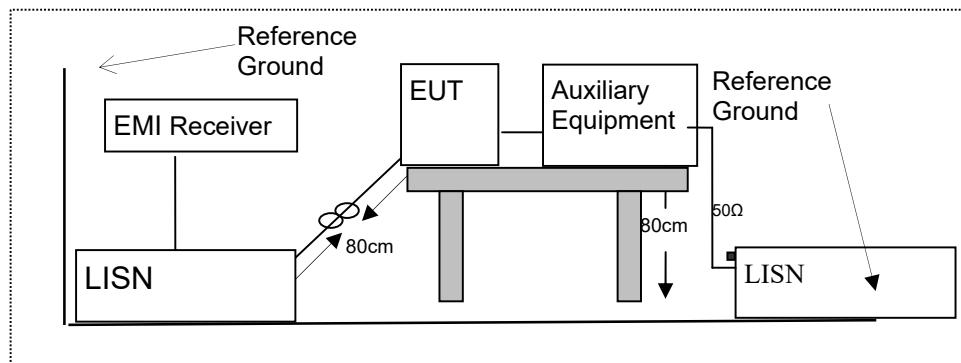

7.4 SUPPORT EQUIPMENT

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
1.	Electric Jukebox	Electric Jukebox	EJ80	2AGKTEJ80	EUT
2.	LCD Monitor	SONY	SDM-S53/B T8UC7	P-17465811-F	Auxiliary Equipment

Notes:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

8 TEST REQUIREMENTS

8.1 DTS (6DB) BANDWIDTH

8.1.1 Applicable Standard

According to FCC Part 15.247(a)(2) and KDB 558074 DTS 01 Meas. Guidance v03r03

8.1.2 Conformance Limit

The minimum -6 dB bandwidth shall be at least 500 kHz.

8.1.3 Test Configuration

Test according to clause 7.1 radio frequency test setup 1

8.1.4 Test Procedure

The EUT was operating in IEEE 802.11b/g/n mode and controlled its channel. Printed out the test result from the spectrum by hard copy function.

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.

Set to the maximum power setting and enable the EUT transmit continuously

Set RBW = 100 kHz.

Set the video bandwidth (VBW) =300 kHz.

Set Span=2 times OBW

Set Detector = Peak.

Set Trace mode = max hold.

Set Sweep = auto couple.

Allow the trace to stabilize.

Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.


Measure and record the results in the test report.

8.1.5 Test Results

Temperature:	24	Test Date:	November 20, 2015
Humidity:	53 %	Test By:	YXL


Operation Mode	Channel Number	Channel Frequency (MHz)	Measurement Bandwidth (MHz)	Limit (kHz)	Verdict
802.11b	1	2412	10.09	>500	PASS
	6	2437	10.09	>500	PASS
	11	2462	10.07	>500	PASS
802.11g	1	2412	16.43	>500	PASS
	6	2437	16.43	>500	PASS
	11	2462	16.43	>500	PASS
802.11n (HT20)	1	2412	17.65	>500	PASS
	6	2437	17.67	>500	PASS
	11	2462	17.66	>500	PASS
802.11n (HT40)	3	2422	35.62	>500	PASS
	6	2437	35.73	>500	PASS
	9	2452	35.88	>500	PASS



Test Model	DTS (6dB) Bandwidth		
	802.11b		
	Channel 1: 2412MHz		
			
Test Model	DTS (6dB) Bandwidth		
	802.11b		
	Channel 6: 2437MHz		
			

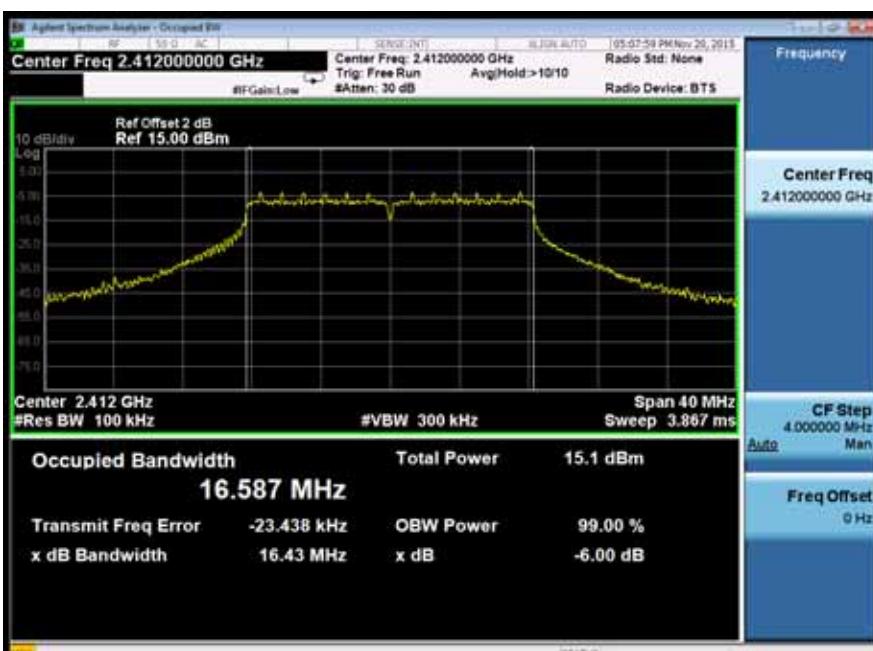Test Model	DTS (6dB) Bandwidth		
	802.11b		
	Channel 11: 2462MHz		
			
Test Model	DTS (6dB) Bandwidth		
	802.11g		
	Channel 1: 2412MHz		
			

Test Model	DTS (6dB) Bandwidth
	802.11g
	Channel 6: 2437MHz
	 <p>Center Freq 2.437000000 GHz</p> <p>Ref Offset 2 dB Ref 15.00 dBm</p> <p>10 dB/div</p> <p>Center 2.437 GHz #Res BW 100 kHz</p> <p>#VBW 300 kHz</p> <p>Span 40 MHz</p> <p>Sweep 3.867 ms</p> <p>Occupied Bandwidth 16.572 MHz</p> <p>Total Power 14.4 dBm</p> <p>Transmit Freq Error -11.431 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 16.43 MHz</p> <p>x dB -6.00 dB</p>
Test Model	DTS (6dB) Bandwidth
	802.11g
	Channel 11: 2462MHz
	 <p>Center Freq 2.462000000 GHz</p> <p>Ref Offset 2 dB Ref 15.00 dBm</p> <p>10 dB/div</p> <p>Center 2.462 GHz #Res BW 100 kHz</p> <p>#VBW 300 kHz</p> <p>Span 40 MHz</p> <p>Sweep 3.867 ms</p> <p>Occupied Bandwidth 16.563 MHz</p> <p>Total Power 14.2 dBm</p> <p>Transmit Freq Error 7.912 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 16.43 MHz</p> <p>x dB -6.00 dB</p>

Test Model	DTS (6dB) Bandwidth					
	802.11n (HT20)					
	Channel 1: 2412MHz					
 <p>Center Freq 2.412000000 GHz</p> <p>Ref Offset 2 dB Ref 15.00 dBm</p> <p>10 dB/div</p> <p>Log</p> <p>Center 2.412 GHz #Res BW 100 kHz #VBW 300 kHz Sweep 3.867 ms</p> <p>Occupied Bandwidth 17.777 MHz</p> <p>Total Power 14.2 dBm</p> <p>Transmit Freq Error -458 Hz OBW Power 99.00 %</p> <p>x dB Bandwidth 17.65 MHz x dB -6.00 dB</p>						
<p>DTS (6dB) Bandwidth</p> <p>802.11n (HT20)</p> <p>Channel 6: 2437MHz</p>						
 <p>Center Freq 2.437000000 GHz</p> <p>Ref Offset 2 dB Ref 15.00 dBm</p> <p>10 dB/div</p> <p>Log</p> <p>Center 2.437 GHz #Res BW 100 kHz #VBW 300 kHz Sweep 3.867 ms</p> <p>Occupied Bandwidth 17.765 MHz</p> <p>Total Power 13.5 dBm</p> <p>Transmit Freq Error -591 Hz OBW Power 99.00 %</p> <p>x dB Bandwidth 17.67 MHz x dB -6.00 dB</p>						

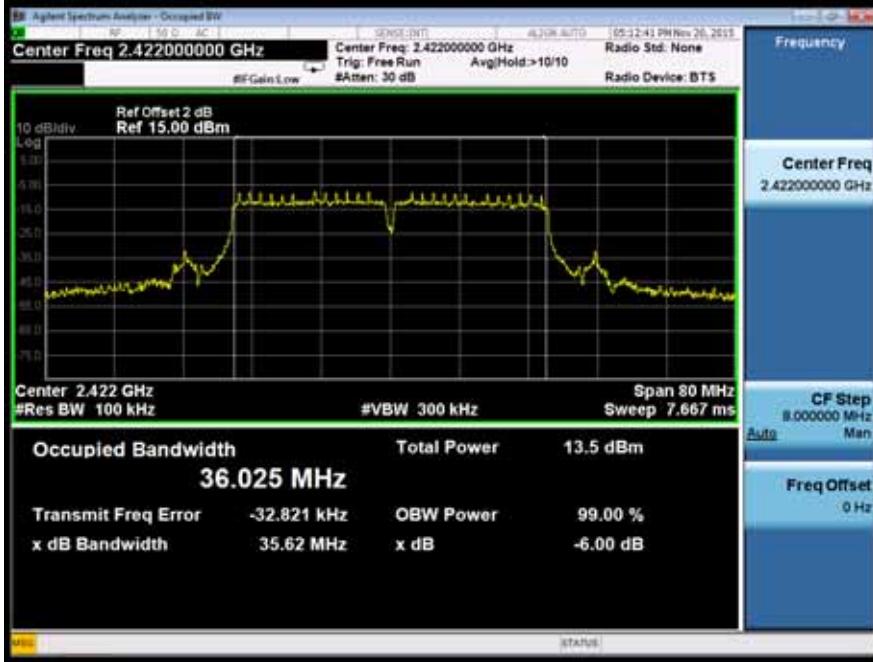Test Model	DTS (6dB) Bandwidth					
	802.11n (HT20)					
	Channel 11: 2462MHz					
 <p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.462000000 GHz</p> <p>Ref Offset 2 dB Ref 15.00 dBm</p> <p>10 dB/div Log</p> <p>Center 2.462 GHz #Res BW 100 kHz #VBW 300 kHz Span 40 MHz Sweep 3.867 ms</p> <p>Occupied Bandwidth 17.869 MHz</p> <p>Total Power 13.2 dBm</p> <p>Transmit Freq Error 14.035 kHz OBW Power 99.00 %</p> <p>x dB Bandwidth 17.66 MHz x dB -6.00 dB</p> <p>CF Step 4.000000 MHz Man</p> <p>Freq Offset 0 Hz</p>						
<p>Test Model</p> <p>DTS (6dB) Bandwidth</p> <p>802.11n (HT40)</p> <p>Channel 3: 2422MHz</p>						
 <p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.422000000 GHz</p> <p>Ref Offset 2 dB Ref 15.00 dBm</p> <p>10 dB/div Log</p> <p>Center 2.422 GHz #Res BW 100 kHz #VBW 300 kHz Span 80 MHz Sweep 7.667 ms</p> <p>Occupied Bandwidth 36.025 MHz</p> <p>Total Power 13.5 dBm</p> <p>Transmit Freq Error -32.821 kHz OBW Power 99.00 %</p> <p>x dB Bandwidth 35.62 MHz x dB -6.00 dB</p> <p>CF Step 8.000000 MHz Man</p> <p>Freq Offset 0 Hz</p>						

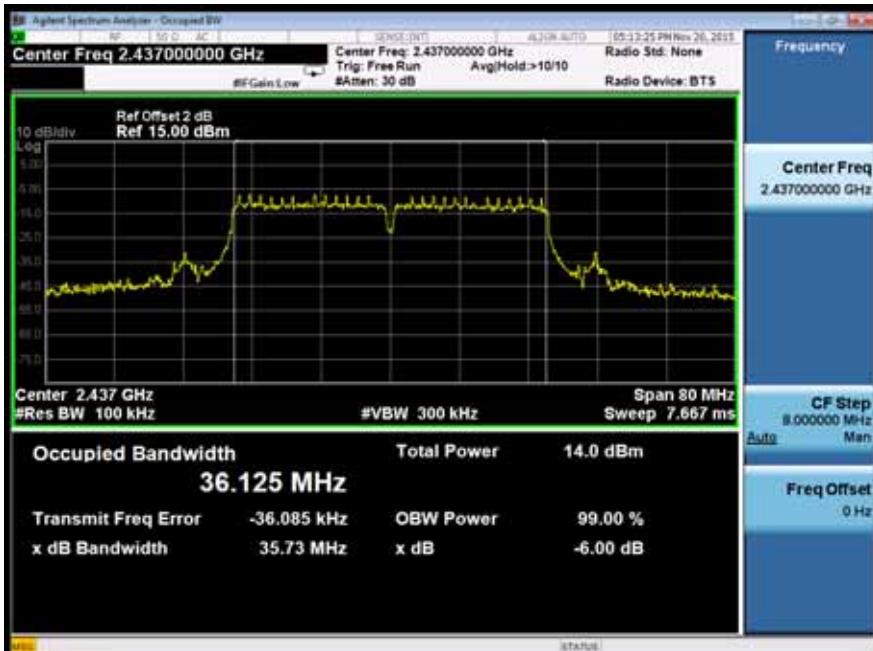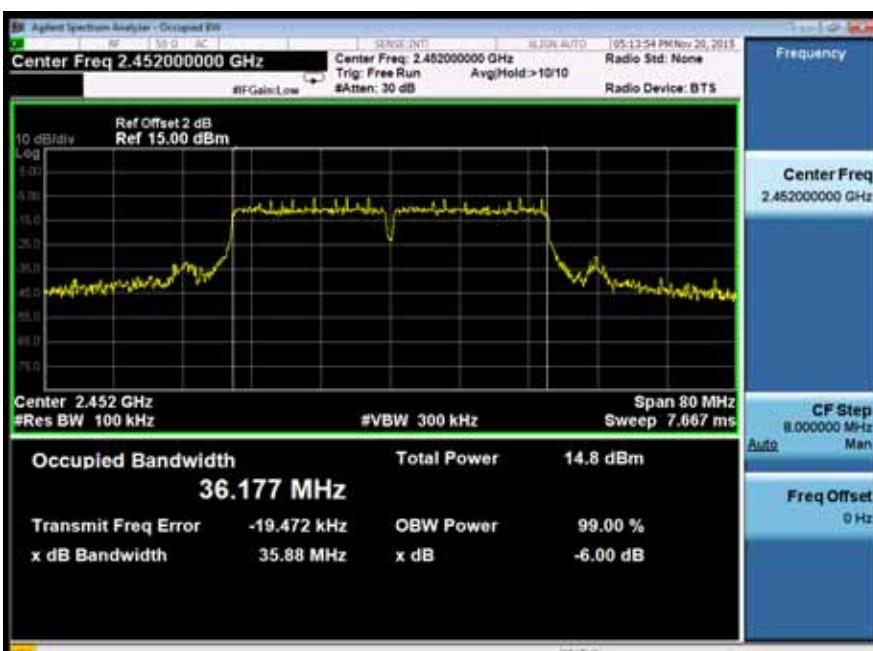Test Model	DTS (6dB) Bandwidth
	802.11n (HT40)
	Channel 6: 2437MHz
	 <p>Ref Offset 2 dB Ref 15.00 dBm</p> <p>10 dB/div</p> <p>Log</p> <p>Center 2.437 GHz #Res BW 100 kHz #VBW 300 kHz Span 80 MHz Sweep 7.667 ms</p> <p>Occupied Bandwidth Total Power 14.0 dBm 36.125 MHz</p> <p>Transmit Freq Error -36.085 kHz OBW Power 99.00 % x dB Bandwidth 35.73 MHz x dB -6.00 dB</p>
Test Model	DTS (6dB) Bandwidth
	802.11n (HT40)
	Channel 9: 2452MHz
	 <p>Ref Offset 2 dB Ref 15.00 dBm</p> <p>10 dB/div</p> <p>Log</p> <p>Center 2.452 GHz #Res BW 100 kHz #VBW 300 kHz Span 80 MHz Sweep 7.667 ms</p> <p>Occupied Bandwidth Total Power 14.8 dBm 36.177 MHz</p> <p>Transmit Freq Error -19.472 kHz OBW Power 99.00 % x dB Bandwidth 35.88 MHz x dB -6.00 dB</p>

8.2 MAXIMUM PEAK CONDUCTED OUTPUT POWER

8.2.1 Applicable Standard

According to FCC Part 15.247(b)(3) and KDB 558074 DTS 01 Meas. Guidance v03r03

8.2.2 Conformance Limit

The maximum peak conducted output power of the intentional radiator for systems using digital modulation in the 2400 - 2483.5 MHz bands shall not exceed: 1 Watt (30dBm).

8.2.3 Test Configuration

Test according to clause 7.1 radio frequency test setup 1

8.2.4 Test Procedure

■ According to FCC Part15.247(b)(3)

The maximum peak conducted output power may be measured using a broadband peak RF power meter. The power meter shall have a video bandwidth that is greater than or equal to the DTS bandwidth and shall utilize a fast-responding diode detector.

The testing follows FCC public Notice DA 00-705 Measurement Guidelines.

The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.

Set to the maximum output power setting and enable the EUT transmit continuously.

Measure the conducted output power with cable loss and record the results in the test report.

Measure and record the results in the report.

■ According to FCC Part 15.247(b)(4):

Conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

8.2.5 Test Results

Temperature:	24	Test Date:	November 20, 2015
Humidity:	53 %	Test By:	YXL

Operation Mode	Channel Number	Channel Frequency (MHz)	Power Setting	Measurement Level (dBm)	Limit (dBm)	Verdict
802.11b	1	2412	46	15.46	30	PASS
	6	2437	46	14.56	30	PASS
	11	2462	46	14.62	30	PASS
802.11g	1	2412	48	15.94	30	PASS
	6	2437	48	15.23	30	PASS
	11	2462	48	15.44	30	PASS
802.11n (HT20)	1	2412	46	14.98	30	PASS
	6	2437	46	14.21	30	PASS
	11	2462	46	14.64	30	PASS
802.11n (HT40)	3	2422	46	13.68	30	PASS
	6	2437	46	14.30	30	PASS
	9	2452	46	14.34	30	PASS
		Note: N/A				

8.3 MAXIMUM POWER SPECTRAL DENSITY

8.3.1 Applicable Standard

According to FCC Part 15.247(e) and KDB 558074 DTS 01 Meas. Guidance v03r03

8.3.2 Conformance Limit

The transmitter power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

8.3.3 Test Configuration

Test according to clause 7.1 radio frequency test setup 1

8.3.4 Test Procedure

This procedure shall be used if maximum peak conducted output power was used to demonstrate compliance

The transmitter output (antenna port) was connected to the spectrum analyzer

Set analyzer center frequency to DTS channel center frequency.

Set the span to 1.5 times the DTS bandwidth.

Set the RBW to: 3 kHz

Set the VBW to: 10 kHz.

Set Detector = peak.

Set Sweep time = auto couple.

Set Trace mode = max hold.


Allow trace to fully stabilize.


Use the peak marker function to determine the maximum amplitude level within the RBW.



8.3.5 Test Results



Temperature:	24	Test Date:	November 20, 2015
Humidity:	53 %	Test By:	YXL



Operation Mode	Channel Number	Channel Frequency (MHz)	Measurement Level (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
802.11b	1	2412	-9.752	8	PASS
	6	2437	-11.813	8	PASS
	11	2462	-11.250	8	PASS
802.11g	1	2412	-17.611	8	PASS
	6	2437	-15.851	8	PASS
	11	2462	-18.440	8	PASS
802.11n (HT20)	1	2412	-19.354	8	PASS
	6	2437	-19.433	8	PASS
	11	2462	-19.598	8	PASS
802.11n (HT40)	3	2422	-22.174	8	PASS
	6	2437	-22.166	8	PASS
	9	2452	-21.494	8	PASS
Note: N/A					

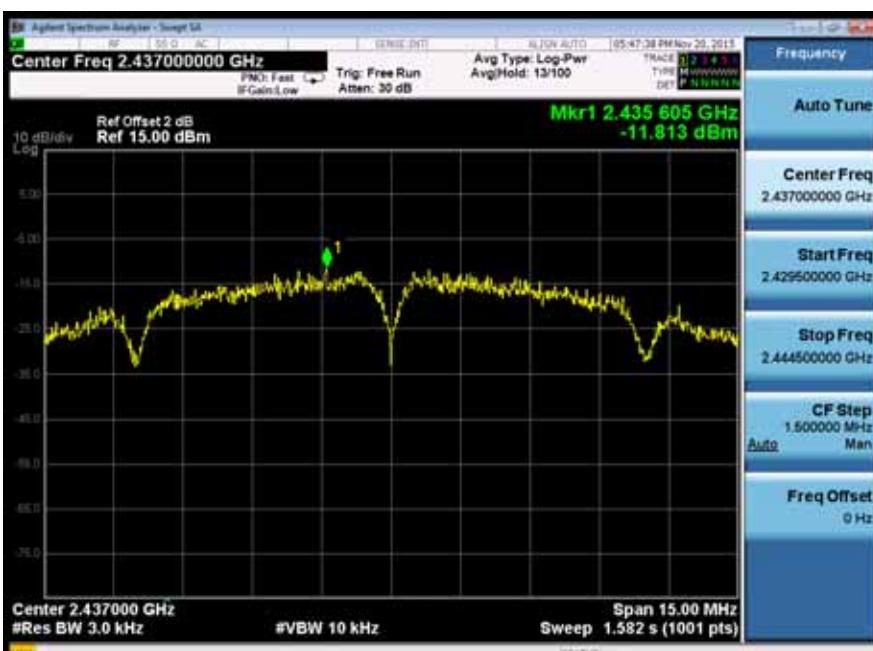Test Model	Power Spectral Density	
	802.11b	
	Channel 1: 2412MHz	
		
Test Model	Power Spectral Density	
	802.11b	
	Channel 6: 2437MHz	
		

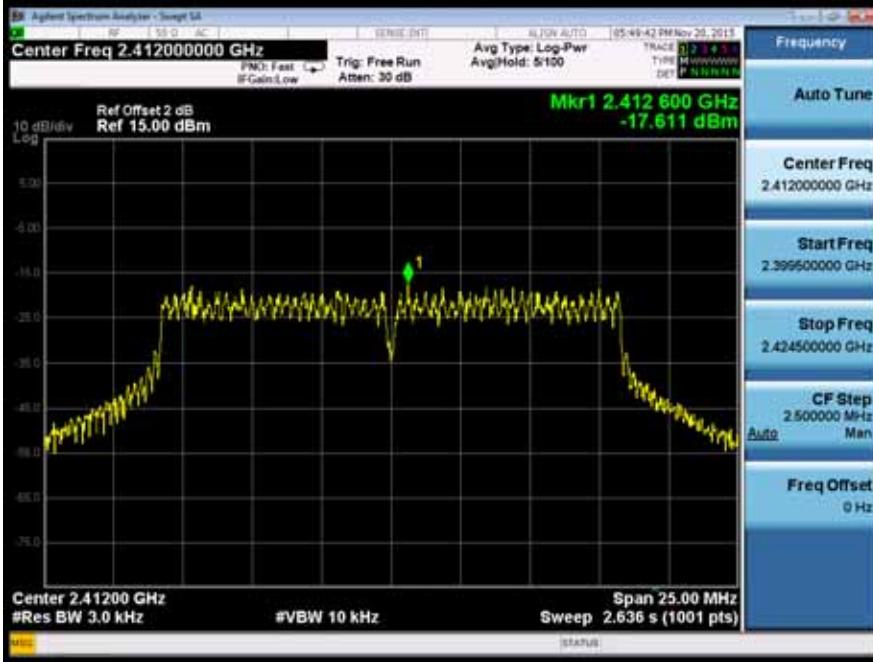Test Model	Power Spectral Density	
	802.11b	
	Channel 11: 2462MHz	
		
Test Model	Power Spectral Density	
	802.11g	
	Channel 1: 2412MHz	
		

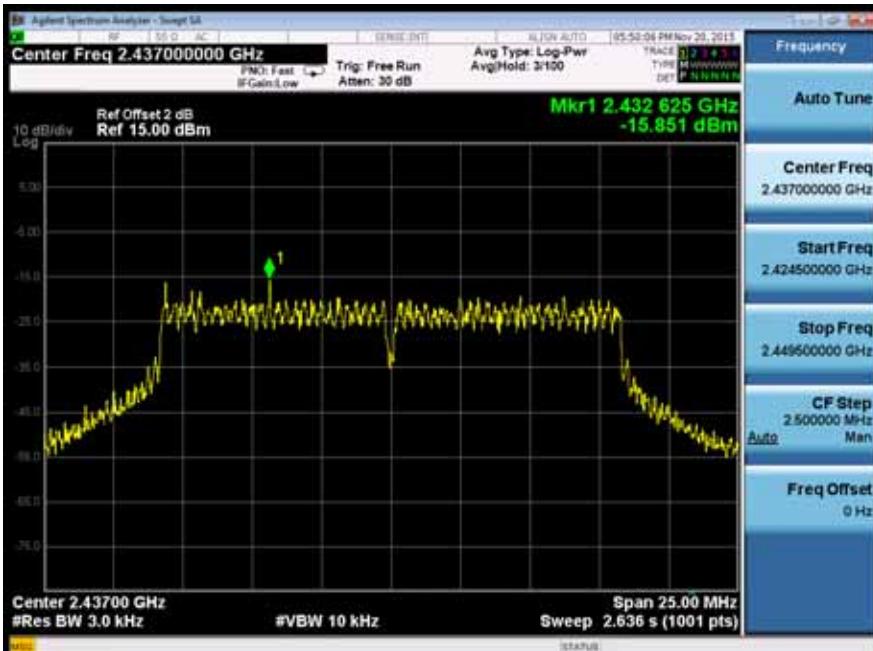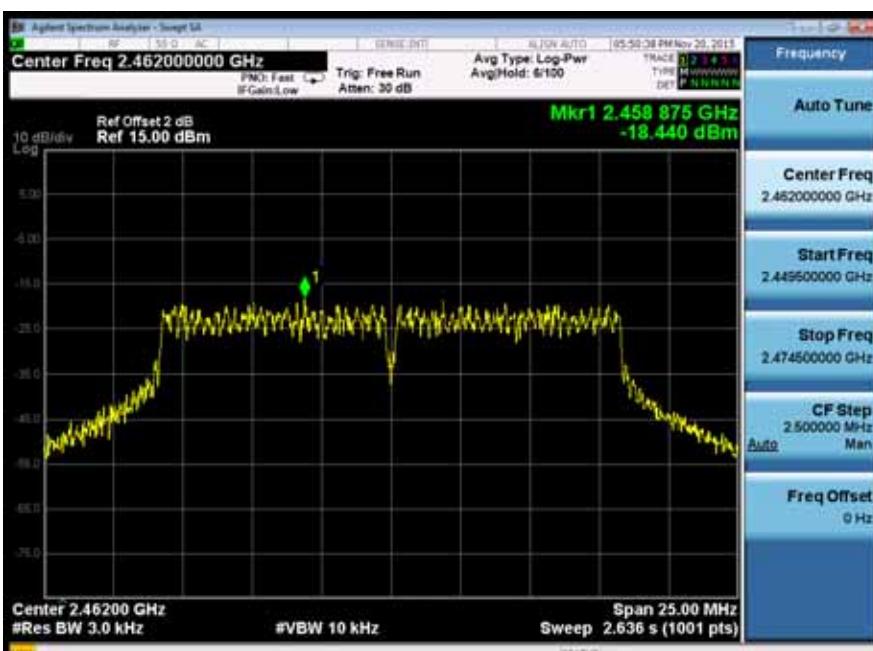Test Model	Power Spectral Density	
	802.11g	
	Channel 6: 2437MHz	
		
Test Model	Power Spectral Density	
	802.11g	
	Channel 11: 2462MHz	
		

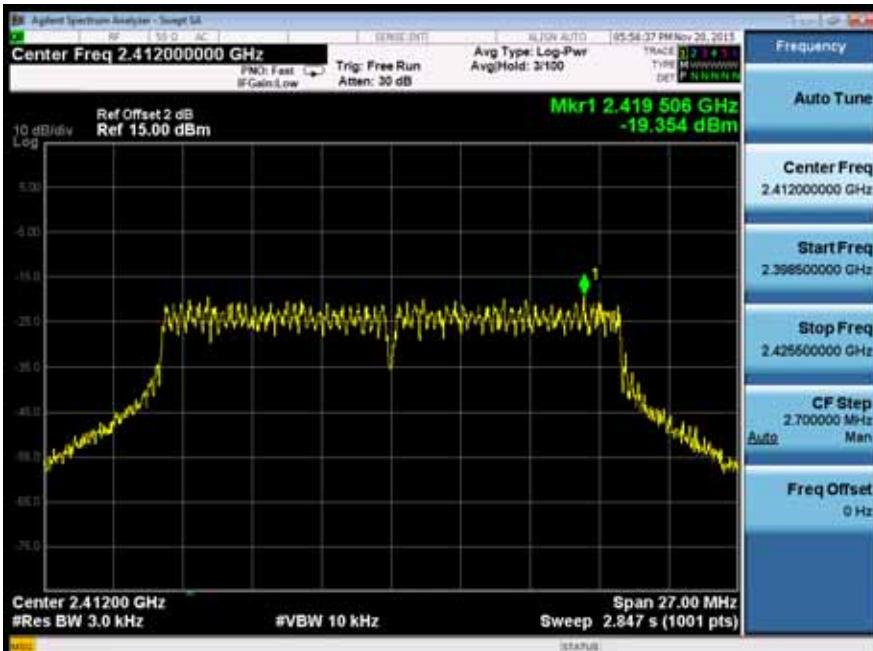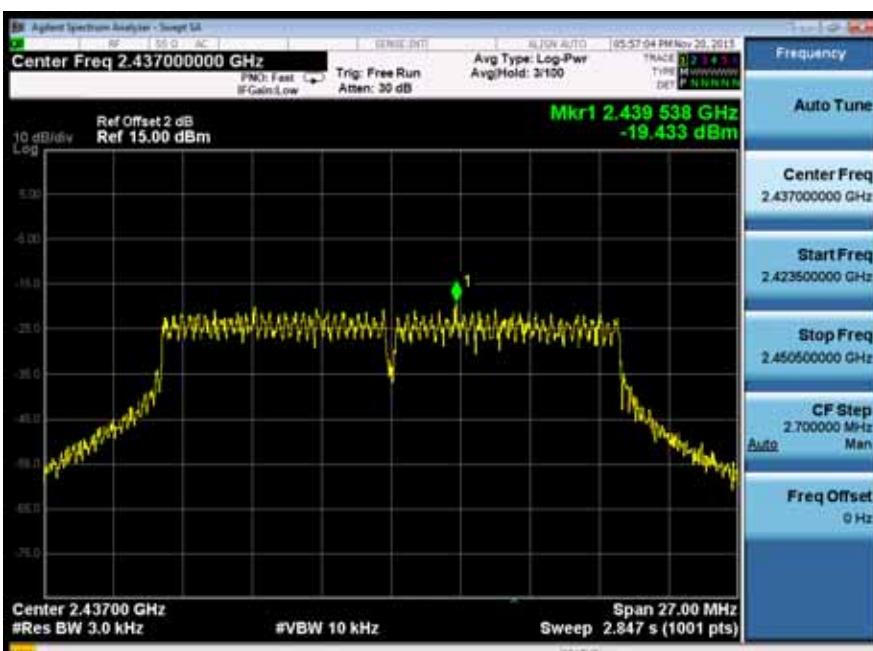Test Model	Power Spectral Density	
	802.11n (HT20)	
	Channel 1: 2412MHz	
 <p>Center Freq 2.412000000 GHz Ref Offset 2 dB Ref 15.00 dBm 10 dB/div Log Mkr1 2.419 506 GHz -19.354 dBm Center 2.41200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 27.00 MHz Sweep 2.847 s (1001 pts) Frequency Auto Tune Center Freq 2.412000000 GHz Start Freq 2.398500000 GHz Stop Freq 2.425500000 GHz CF Step 2.700000 MHz Auto Man Freq Offset 0 Hz</p>		
Test Model	Power Spectral Density	
	802.11n (HT20)	
	Channel 6: 2437MHz	
 <p>Center Freq 2.437000000 GHz Ref Offset 2 dB Ref 15.00 dBm 10 dB/div Log Mkr1 2.439 538 GHz -19.433 dBm Center 2.43700 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 27.00 MHz Sweep 2.847 s (1001 pts) Frequency Auto Tune Center Freq 2.437000000 GHz Start Freq 2.423500000 GHz Stop Freq 2.450500000 GHz CF Step 2.700000 MHz Auto Man Freq Offset 0 Hz</p>		

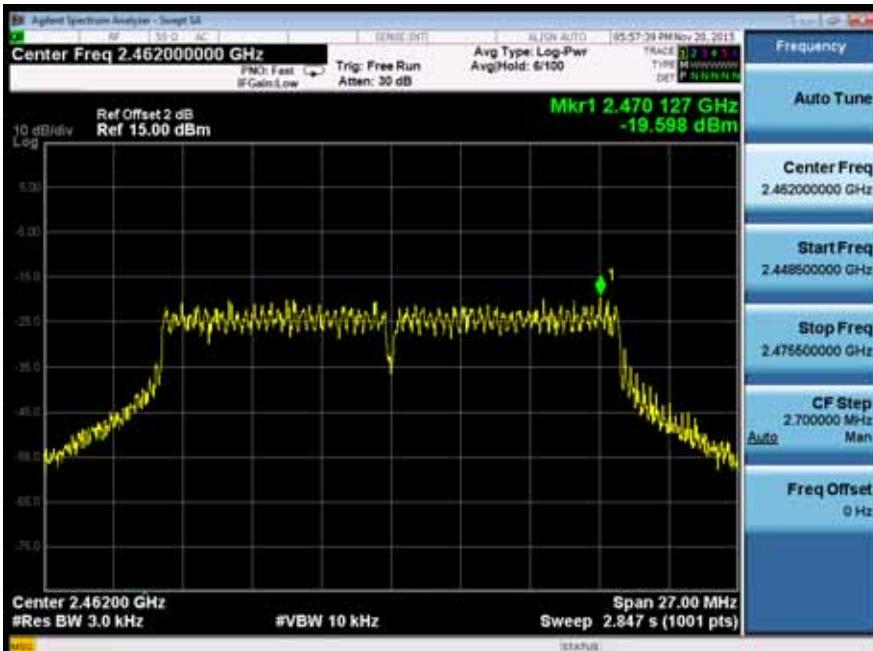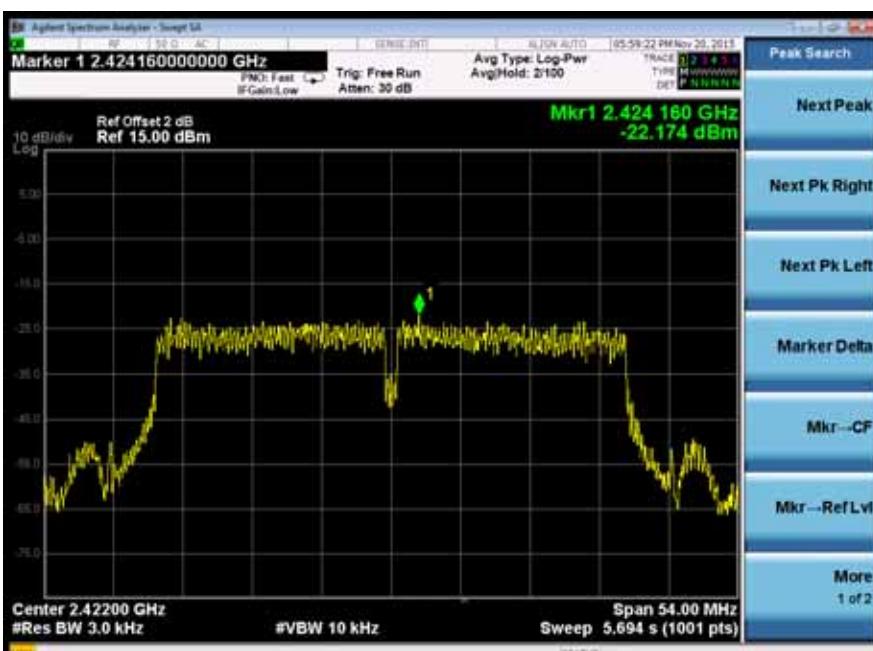Test Model	Power Spectral Density	
	802.11n (HT20)	
	Channel 11: 2462MHz	
		
Test Model	Power Spectral Density	
	802.11n (HT40)	
	Channel 3: 2422MHz	
		

Test Model	Power Spectral Density	
	802.11n (HT40)	
	Channel 6: 2437MHz	
		
Test Model	Power Spectral Density	
	802.11n (HT40)	
	Channel 9: 2452MHz	
		

8.4 UNWANTED EMISSIONS INTO NON-RESTRICTED FREQUENCY BANDS

8.4.1 Applicable Standard

According to FCC Part 15.247(d) and KDB 558074 DTS 01 Meas. Guidance v03r03

8.4.2 Conformance Limit

According to FCC Part 15.247(d):

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.

8.4.3 Test Configuration

Test according to clause 7.1 radio frequency test setup 1

8.4.4 Test Procedure

The transmitter output (antenna port) was connected to the spectrum analyzer

■ Reference level measurement

Establish a reference level by using the following procedure:

Set instrument center frequency to DTS channel center frequency.

Set the span to ≥ 1.5 times the DTS bandwidth.

Set the RBW = 100 kHz.

Set the VBW $\geq 3 \times$ RBW.

Set Detector = peak.

Set Sweep time = auto couple.

Set Trace mode = max hold.

Allow trace to fully stabilize.

Use the peak marker function to determine the maximum PSD level.

Note that the channel found to contain the maximum PSD level can be used to establish the reference level.

■ Emission level measurement

Set the center frequency and span to encompass frequency range to be measured.

Set the RBW = 100 kHz.

Set the VBW = 300 kHz.

Set Detector = peak

Sweep time = auto couple.

Trace mode = max hold.


Allow trace to fully stabilize.

Use the peak marker function to determine the maximum amplitude level.

Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) are attenuated by at least the minimum requirements. Report the three highest emissions relative to the limit.

8.4.5 Test Results

All the modulation modes were tested, the data of the worst mode(802.11b) are described in the following table

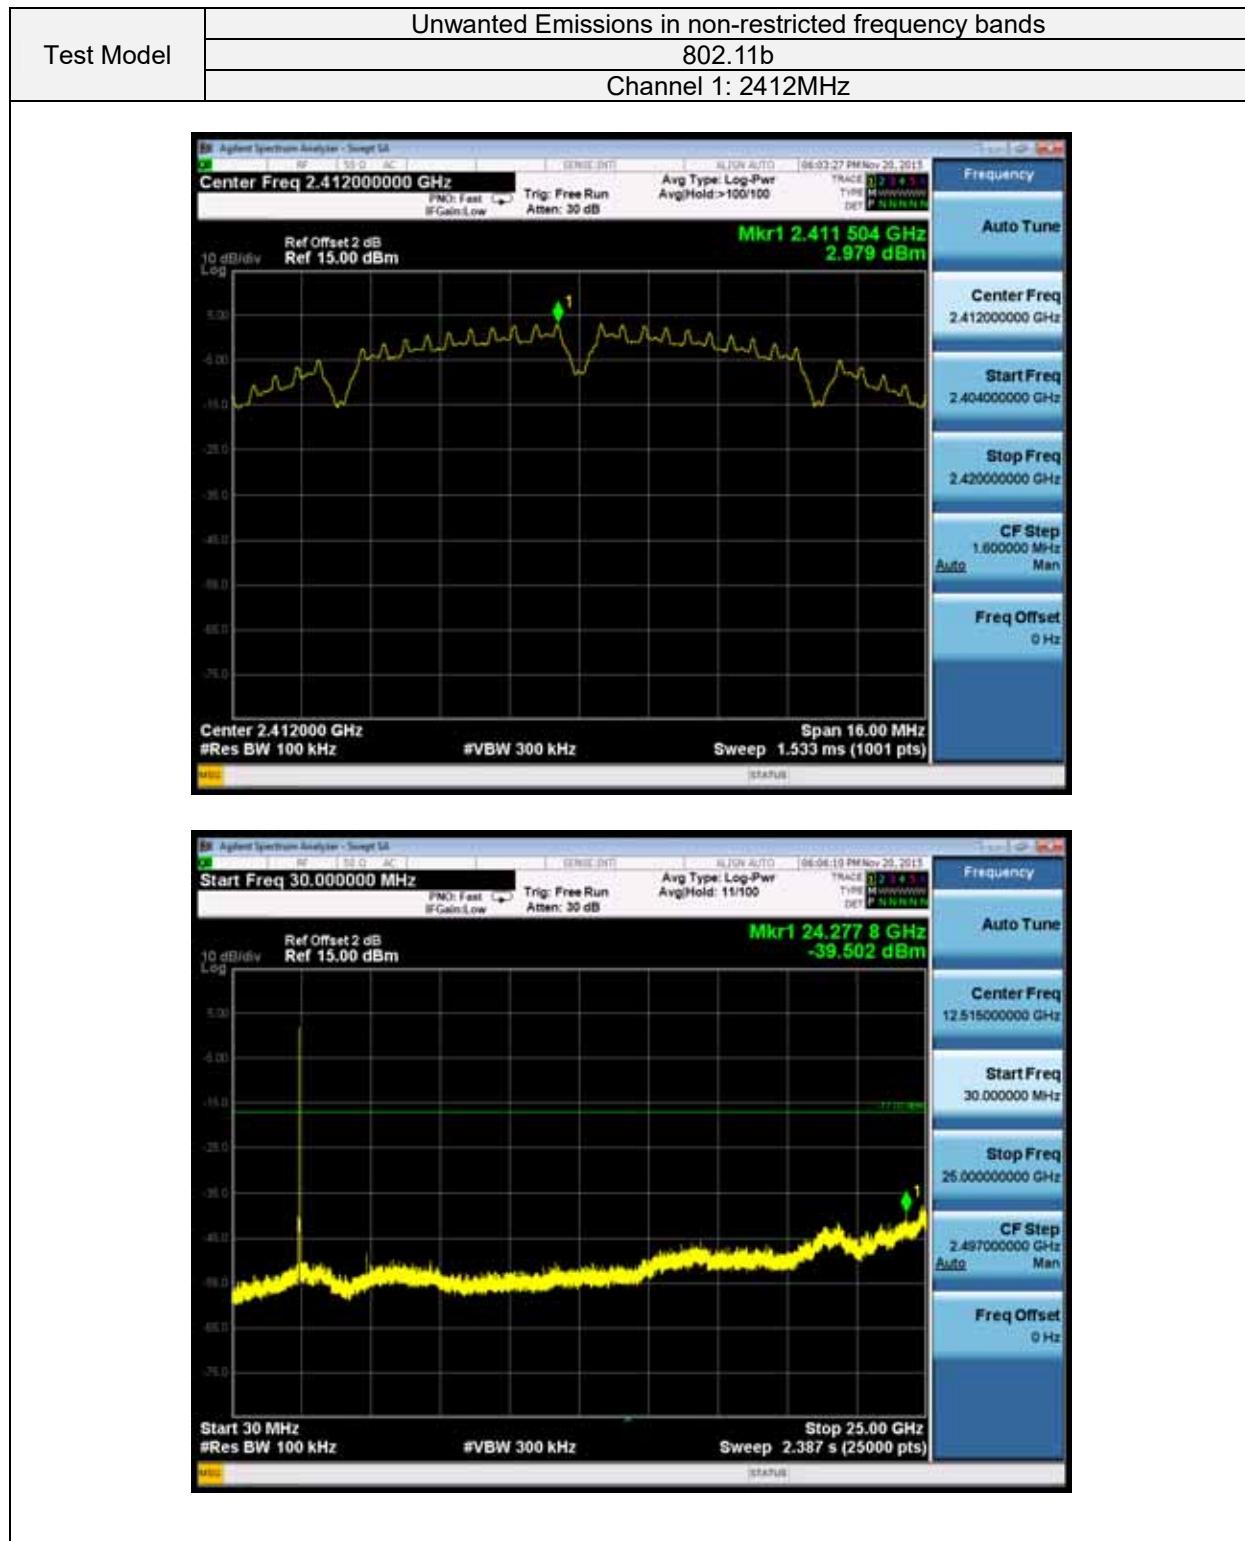

Test Model	Unwanted Emissions in non-restricted frequency bands	
	802.11b	
	Channel 6: 2437MHz	
 <p>Agilent Spectrum Analyzer - Design 5A</p> <p>Center Freq 2.437000000 GHz</p> <p>Ref Offset 2 dB</p> <p>Ref 15.00 dBm</p> <p>10 dB/div</p> <p>Log</p> <p>10.00</p> <p>-4.00</p> <p>-28.00</p> <p>-46.00</p> <p>-64.00</p> <p>-82.00</p> <p>-100.00</p> <p>Center 2.437000 GHz</p> <p>#Res BW 100 kHz</p> <p>#VBW 300 kHz</p> <p>Span 16.00 MHz</p> <p>Trig: Free Run</p> <p>Atten: 30 dB</p> <p>Avg Type: Log-Pwr</p> <p>Avg Hold: >100/100</p> <p>Trace 1 2 3 4 5</p> <p>Type: M M M M M</p> <p>DET: P P P P P</p> <p>Frequency</p> <p>Auto Tune</p> <p>Center Freq: 2.437000000 GHz</p> <p>Start Freq: 2.429000000 GHz</p> <p>Stop Freq: 2.446000000 GHz</p> <p>CF Step: 1.600000 MHz</p> <p>Auto: Man</p> <p>Freq Offset: 0 Hz</p> <p>Mkr1 2.437 512 GHz</p> <p>2.205 dBm</p> <p>1.533 ms (1001 pts)</p> <p>1</p>		
 <p>Agilent Spectrum Analyzer - Design 5A</p> <p>Start Freq 30.000000 MHz</p> <p>Ref Offset 2 dB</p> <p>Ref 15.00 dBm</p> <p>10 dB/div</p> <p>Log</p> <p>5.00</p> <p>4.00</p> <p>-16.00</p> <p>-28.00</p> <p>-46.00</p> <p>-64.00</p> <p>-82.00</p> <p>-100.00</p> <p>Start 30 MHz</p> <p>#Res BW 100 kHz</p> <p>#VBW 300 kHz</p> <p>Stop 25.00 GHz</p> <p>Sweep 2.387 s (25000 pts)</p> <p>Trig: Free Run</p> <p>Atten: 30 dB</p> <p>Avg Type: Log-Pwr</p> <p>Avg Hold: 16/100</p> <p>Trace 1 2 3 4 5</p> <p>Type: M M M M M</p> <p>DET: P P P P P</p> <p>Frequency</p> <p>Auto Tune</p> <p>Center Freq: 12.515000000 GHz</p> <p>Start Freq: 30.000000 MHz</p> <p>Stop Freq: 25.000000000 GHz</p> <p>CF Step: 2.497000000 GHz</p> <p>Auto: Man</p> <p>Freq Offset: 0 Hz</p> <p>Mkr1 23.391 9 GHz</p> <p>-40.800 dBm</p> <p>1.533 ms (1001 pts)</p> <p>1</p>		



Test Model	Band edge 802.11b Channel 1: 2412MHz	
		
	<p>Start Freq 2.390000000 GHz Ref Offset 2 dB Ref 15.00 dBm 10 dB/div Log</p> <p>Trig: Free Run Atten: 30 dB</p> <p>Mkr1 2.400 000 0 GHz -38.288 dBm</p> <p>Start 2.39000 GHz #Res BW 100 kHz #VBW 300 kHz Stop 2.42000 GHz Sweep 3.333 ms (25000 pts)</p>	
Test Model	Band edge 802.11b Channel 11: 2462MHz	
		
	<p>Start Freq 2.450000000 GHz Ref Offset 2 dB Ref 15.00 dBm 10 dB/div Log</p> <p>Trig: Free Run Atten: 30 dB</p> <p>Mkr1 2.483 500 GHz -55.258 dBm</p> <p>Start 2.45000 GHz #Res BW 100 kHz #VBW 300 kHz Stop 2.50000 GHz Sweep 5.000 ms (25000 pts)</p>	

8.5 RADIATED SPURIOUS EMISSION

8.5.1 Applicable Standard

According to FCC Part 15.247(d) and 15.209 and KDB 558074 DTS 01 Meas. Guidance v03r03

8.5.2 Conformance Limit

According to FCC Part 15.247(d): radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).
According to FCC Part15.205, Restricted bands

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
10.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(2)
13.36-13.41			

According to FCC Part15.205, the level of any transmitter spurious emission in Restricted bands shall not exceed the level of the emission specified in the following table

Restricted Frequency(MHz)	Field Strength (μ V/m)	Field Strength (dB μ V/m)	Measurement Distance
0.009~0.490	2400/F(KHz)	20 log (μ V/m)	300
0.490~1.705	2400/F(KHz)	20 log (μ V/m)	30
1.705~30.0	30	29.5	30
30-88	100	40	3
88-216	150	43.5	3
216-960	200	46	3
Above 960	500	54	3

Remark:1. Emission level in dB μ V/m=20 log (μ V/m)

2. Measurement was performed at an antenna to the closed point of EUT distance of meters.

3. Distance extrapolation factor =40log(Specific distance/ test distance)(dB);

Limit line=Specific limits(dB μ V) + distance extrapolation factor.

for the frequency ranges below 30 MHz, a narrower RBW is used for these ranges but the measured value should add a RBW correction factor (RBWCF) where RBWCF [dB] = $10 \times \lg(100 [\text{kHz}]/\text{narrower RBW} [\text{kHz}])$. , the narrower RBW is 1 kHz and RBWCF is 20 dB for the frequency 9 kHz to 150 kHz, and the narrower RBW is 10 kHz and RBWCF is 10 dB for the frequency 150 kHz to 30 MHz.

8.5.3 Test Configuration

Test according to clause 7.2 radio frequency test setup 2

8.5.4 Test Procedure

This test is required for any spurious emission that falls in a Restricted Band, as defined in Section 15.205. It must be performed with the highest gain of each type of antenna proposed for use with the EUT. Use the following spectrum analyzer settings:

For Above 1GHz:

The EUT was placed on a turn table which is 1.5m above ground plane.

Maximum procedure was performed on the highest emissions to ensure EUT compliance.

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz

VBW \geq RBW for peak measurement

VBW = 10Hz for Average measurement

Sweep = auto

Detector function = peak

Trace = max hold

For Below 1GHz:

The EUT was placed on a turn table which is 0.8m above ground plane.

Maximum procedure was performed on the highest emissions to ensure EUT compliance.

Span = wide enough to fully capture the emission being measured

RBW = 100 kHz

VBW \geq RBW

Sweep = auto

Detector function = peak

Trace = max hold

Follow the guidelines in ANSI C63.10-2013 with respect to maximizing the emission by rotating the EUT, measuring the emission while the EUT is situated in three orthogonal planes (if appropriate), adjusting the measurement antenna height and polarization, etc. A pre-amp and a high pass filter are required for this test, in order to provide the measuring system with sufficient sensitivity. Allow the trace to stabilize. The peak reading of the emission, after being corrected by the antenna factor, cable loss, pre-amp gain, etc., is the peak field strength, which must comply with the limit specified in Section 15.35(b). Submit this data.

Now set the VBW to 10 Hz, while maintaining all of the other instrument settings. This peak level, once corrected, must comply with the limit specified in Section 15.209. If the dwell time per channel of the hopping signal is less than 100 ms, then the reading obtained with the 10 Hz VBW may be further adjusted by a "duty cycle correction factor", derived from $20\log(\text{dwell time}/100 \text{ ms})$, in an effort to demonstrate compliance with the 15.209 limit. Submit this data.

Repeat above procedures until all frequency measured was complete.

8.5.5 Test Results

All the modulation modes were tested the data of the worst mode are recorded as below.


■ Spurious Emission below 30MHz (9KHz to 30MHz)

Test mode: TX Mode

Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Over(dB)	
		PK	AV	PK	AV	PK	AV
--	--	--	--	--	--	--	--

■ Spurious Emission Below 1GHz (30MHz to 1GHz)

All modes 2.4G 802.11b/g/n have been tested, and the worst result 802.11b recorded was report as below:

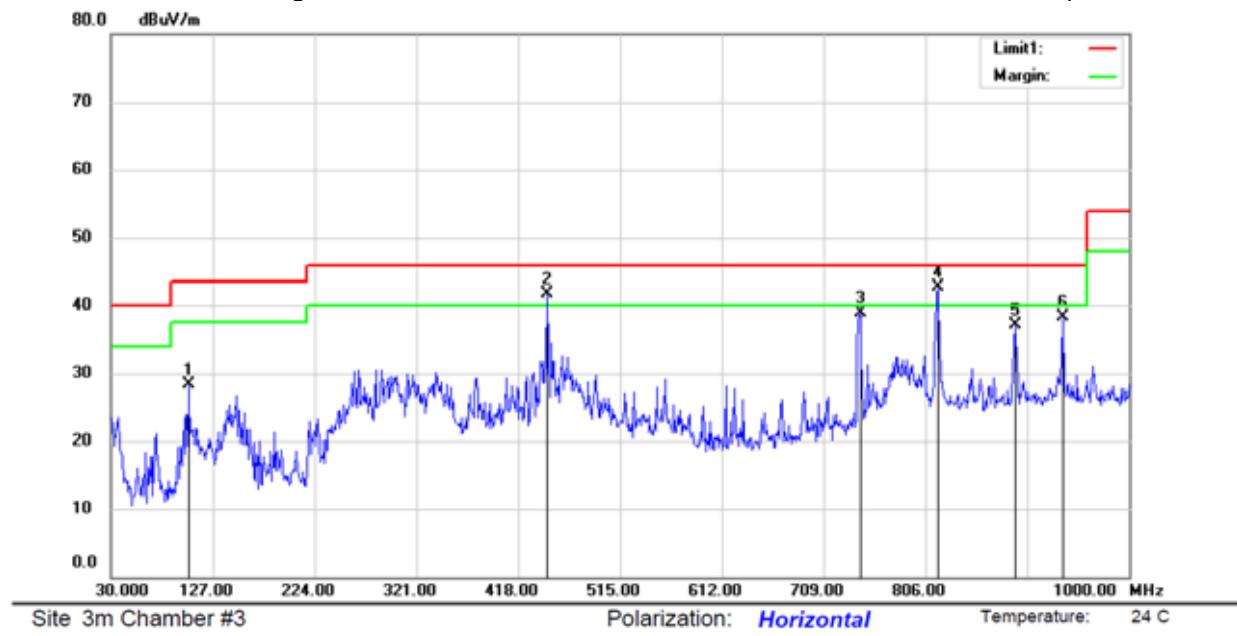

Site 3m Chamber #3

Polarization: **Horizontal**

Temperature: 24 C

Limit: (RE)FCC PART 15 CLASS B

Power: AC 120V/60Hz

Humidity: 53 %


Mode: 802.11b Low Channel

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height		Table Degree						
								MHz	dBuV	dB	dBuV/m	dB	Detector	cm	degree	Comment
1		103.7200	42.39	-14.07	28.32	43.50	-15.18	QP								
2	!	446.1300	52.88	-11.25	41.63	46.00	-4.37	QP								
3		743.9200	43.57	-4.62	38.95	46.00	-7.05	QP								
4	*	817.6400	45.12	-2.47	42.65	46.00	-3.35	QP								
5		891.3600	37.88	-0.82	37.06	46.00	-8.94	QP								
6		936.9500	38.92	-0.68	38.24	46.00	-7.76	QP								


*:Maximum data x:Over limit !:over margin

Operator: KK

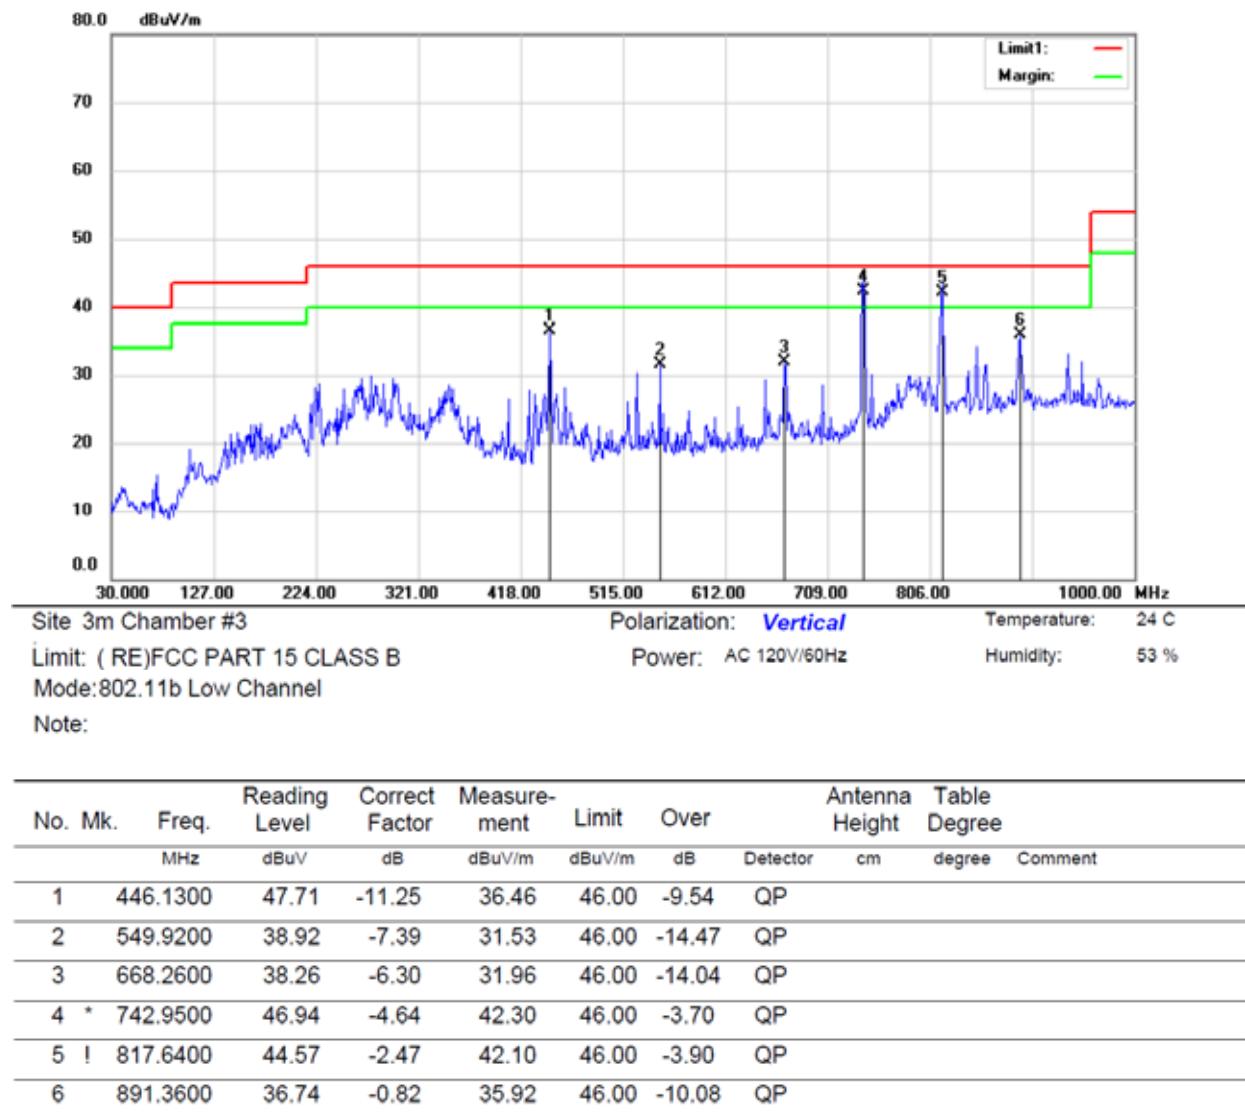


*:Maximum data x:Over limit !:over margin

Operator: KK

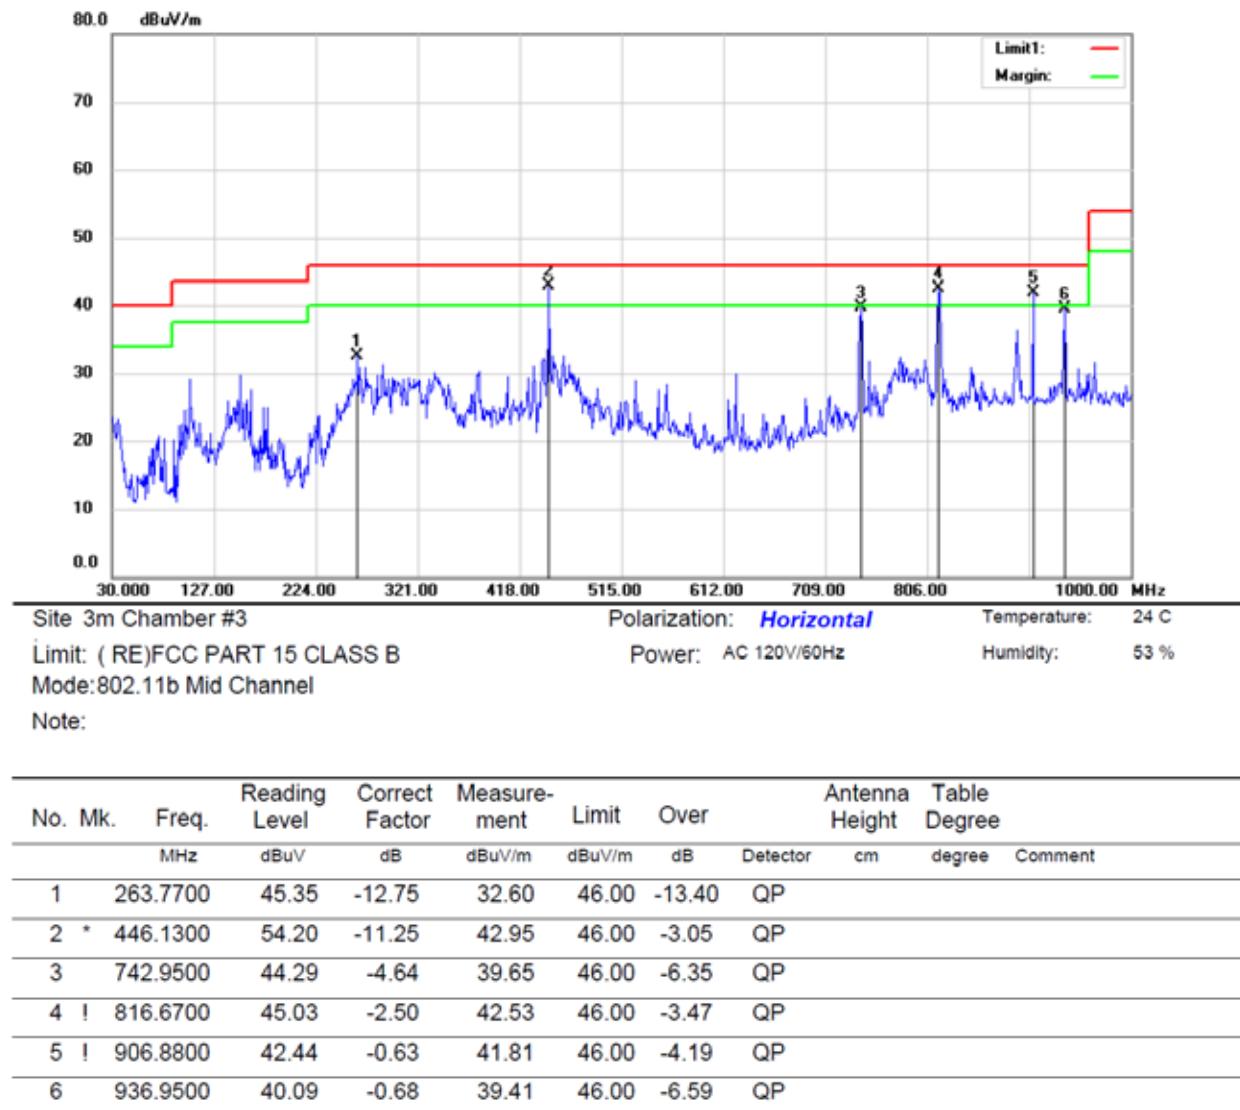


*:Maximum data x:Over limit !:over margin

Operator: KK

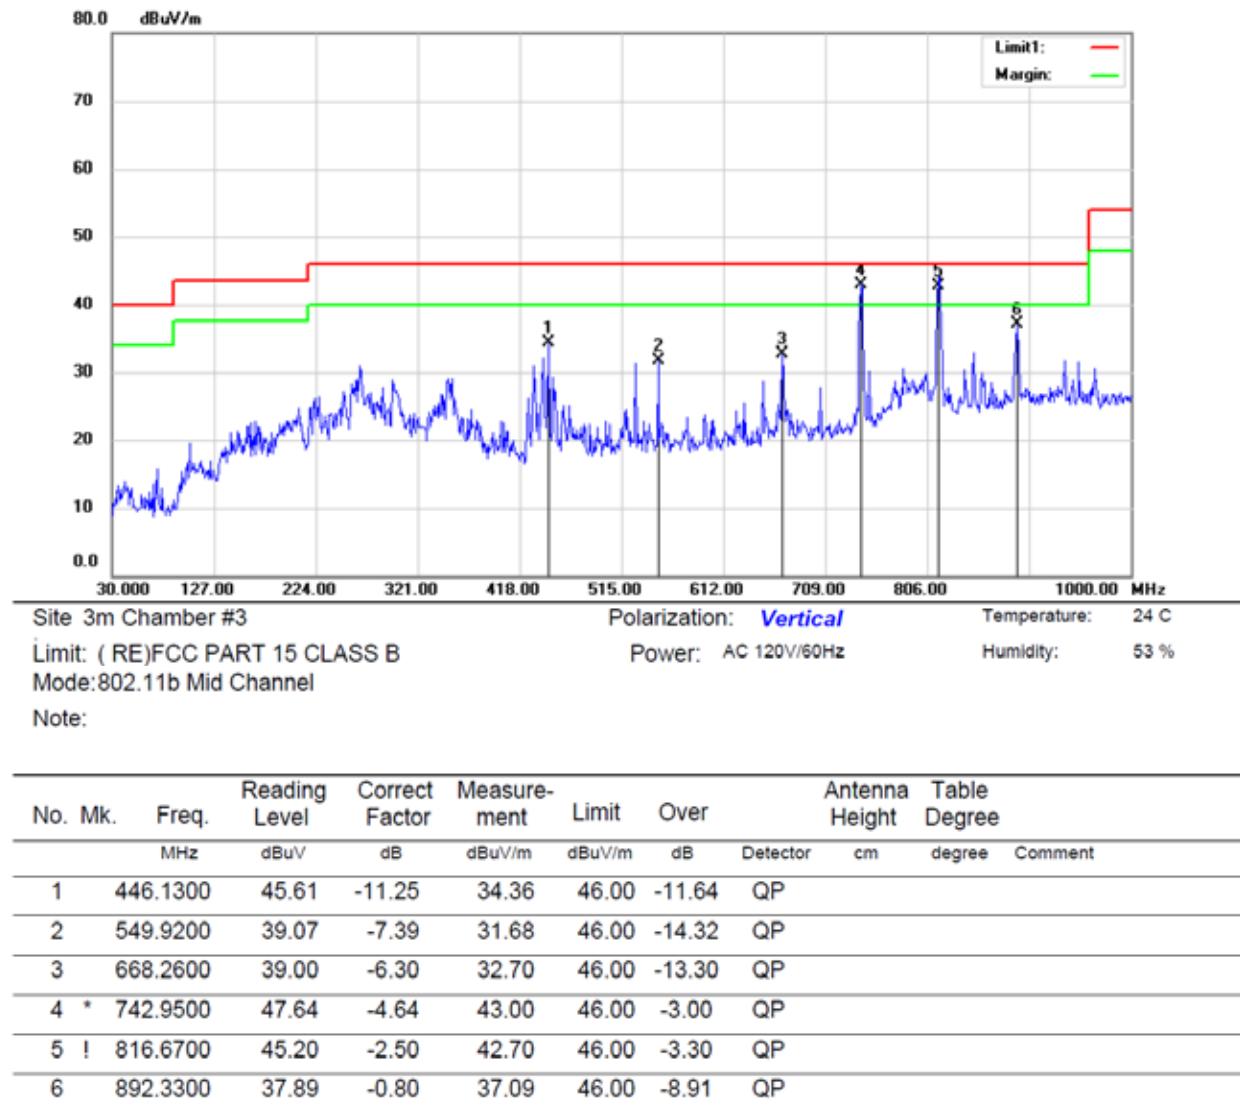


*:Maximum data x:Over limit !:over margin

Operator: KK

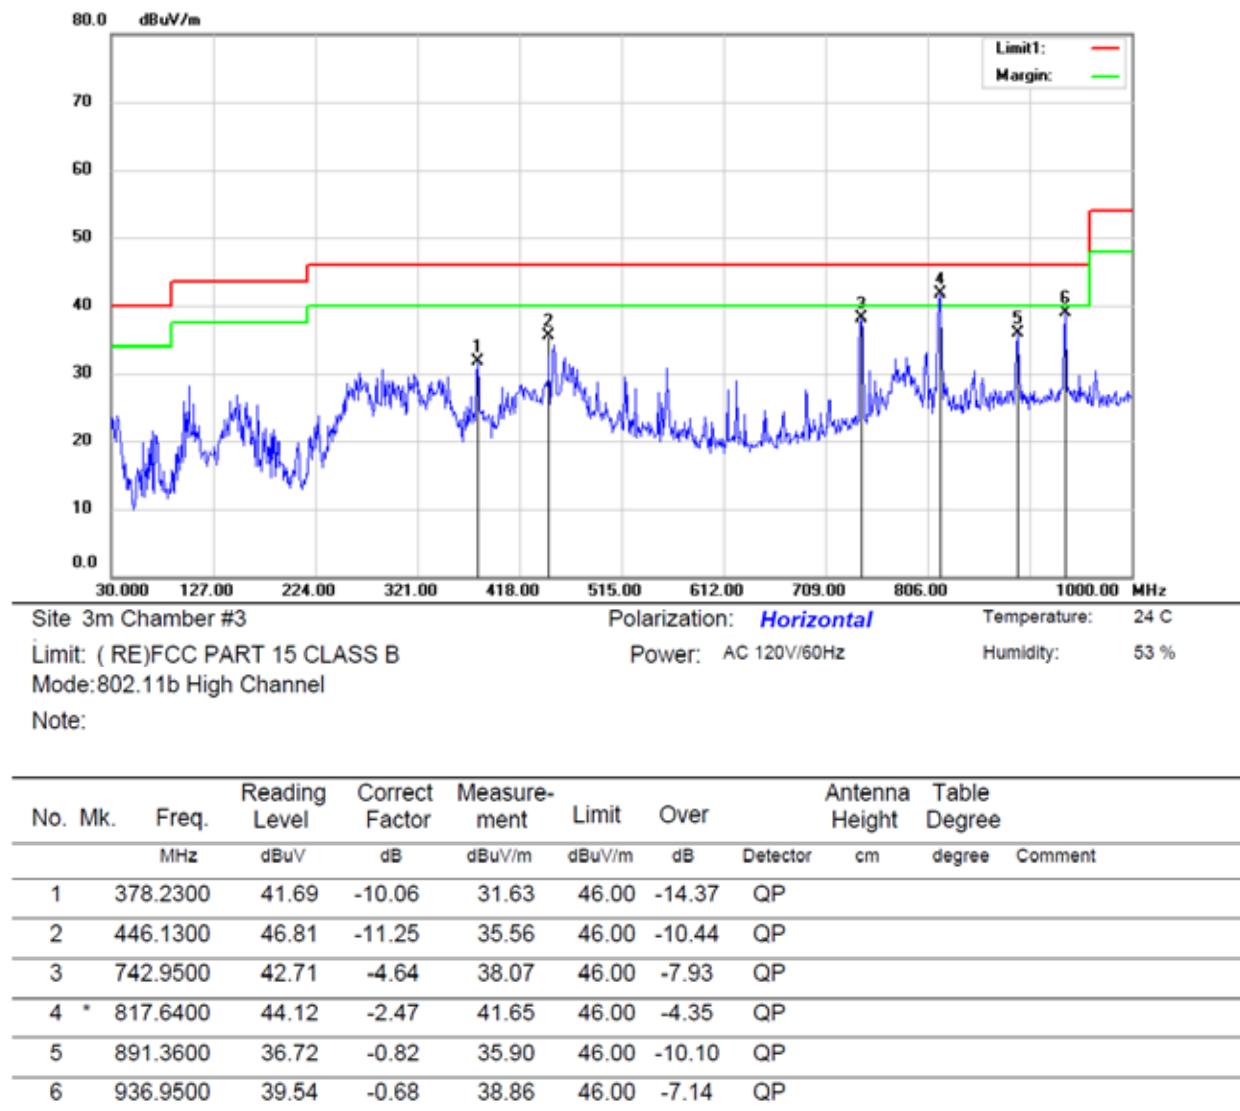

*:Maximum data x:Over limit !:over margin


Operator: KK

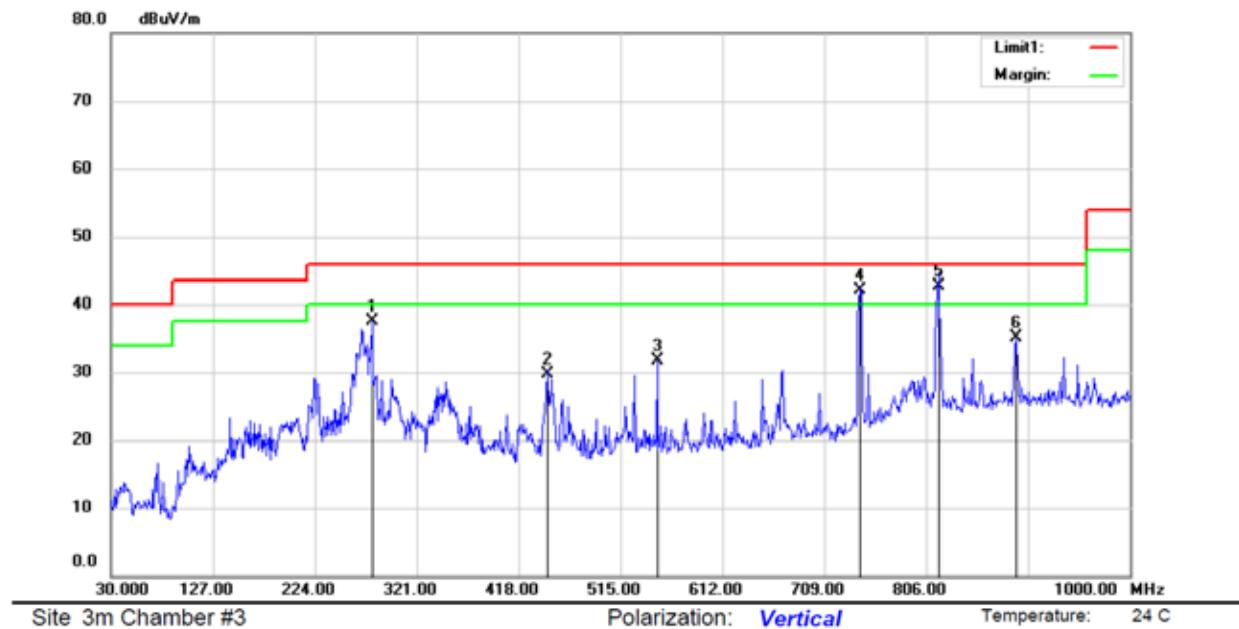

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table	
			Level	Factor	ment					
		MHz	dBuV	dB	dBuV/m	dB	Detector	cm	degree	Comment
1		278.3200	50.10	-12.59	37.51	46.00	-8.49	QP		
2		445.1600	41.02	-11.24	29.78	46.00	-16.22	QP		
3		549.9200	39.07	-7.39	31.68	46.00	-14.32	QP		
4	!	742.9500	46.74	-4.64	42.10	46.00	-3.90	QP		
5	*	817.6400	45.27	-2.47	42.80	46.00	-3.20	QP		
6		891.3600	35.96	-0.82	35.14	46.00	-10.86	QP		

*:Maximum data x:Over limit !:over margin


Operator: KK

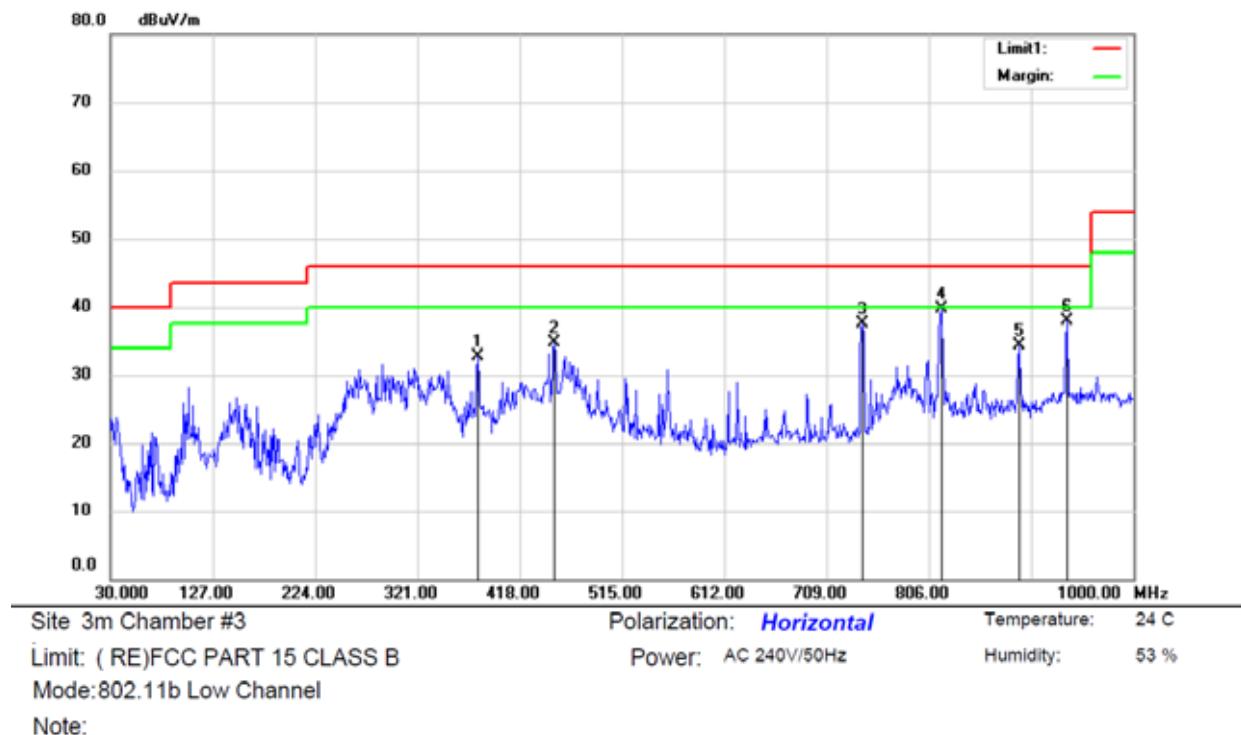

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm		Table Degree	
								Detector	cm	degree	Comment
1		378.2300	42.69	-10.06	32.63	46.00	-13.37	QP			
2		450.9800	45.93	-11.29	34.64	46.00	-11.36	QP			
3		742.9500	42.21	-4.64	37.57	46.00	-8.43	QP			
4	*	817.6400	42.12	-2.47	39.65	46.00	-6.35	QP			
5		891.3600	35.22	-0.82	34.40	46.00	-11.60	QP			
6		936.9500	38.54	-0.68	37.86	46.00	-8.14	QP			


*:Maximum data x:Over limit !:over margin

Operator: KK

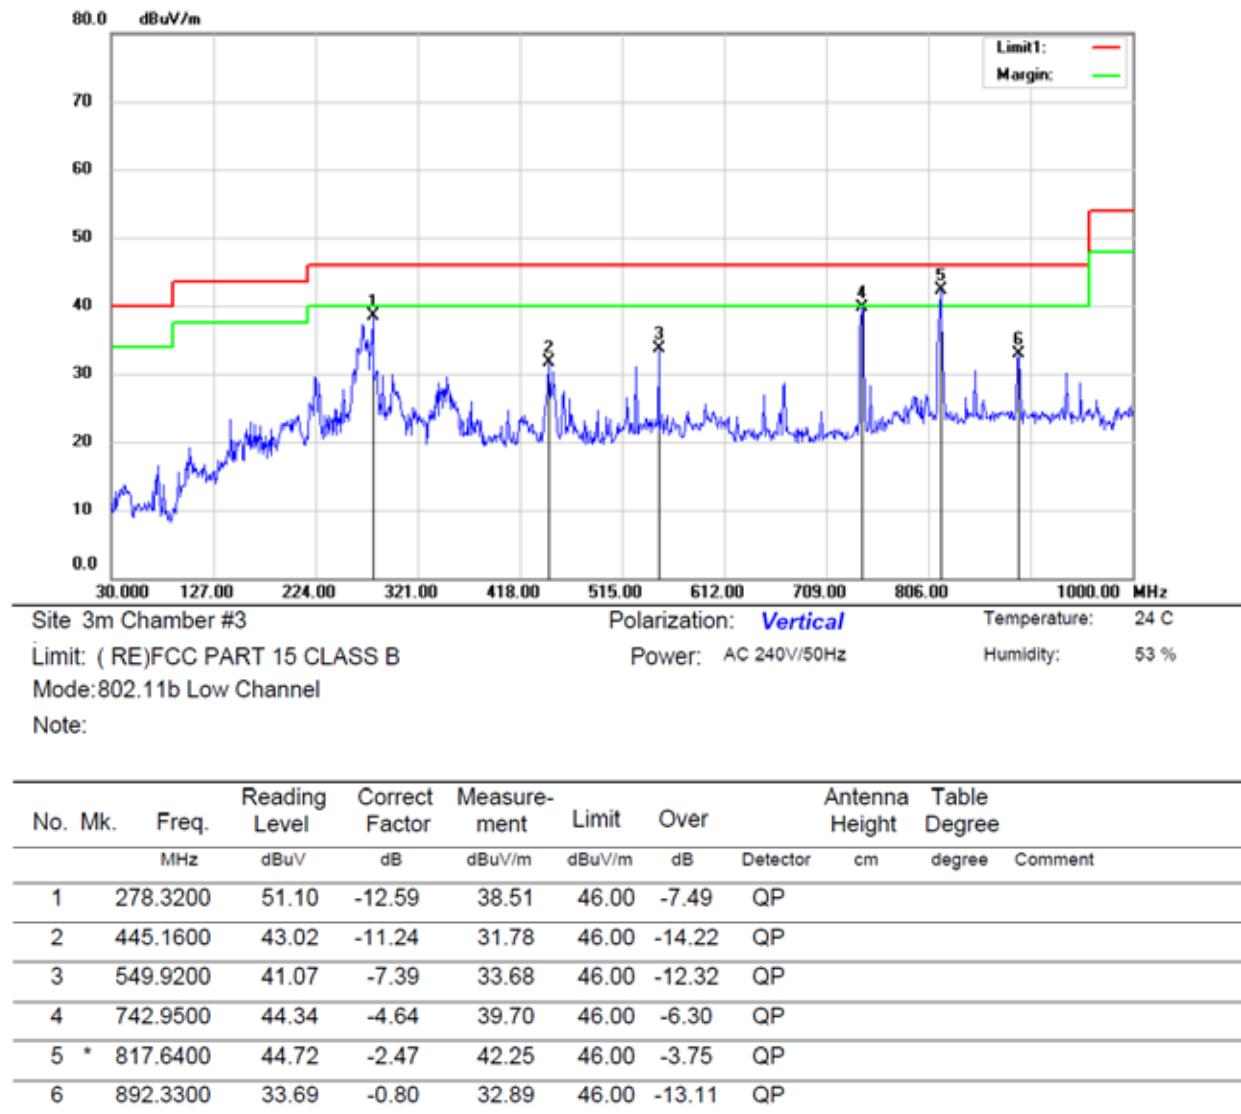


*:Maximum data x:Over limit !:over margin

Operator: KK

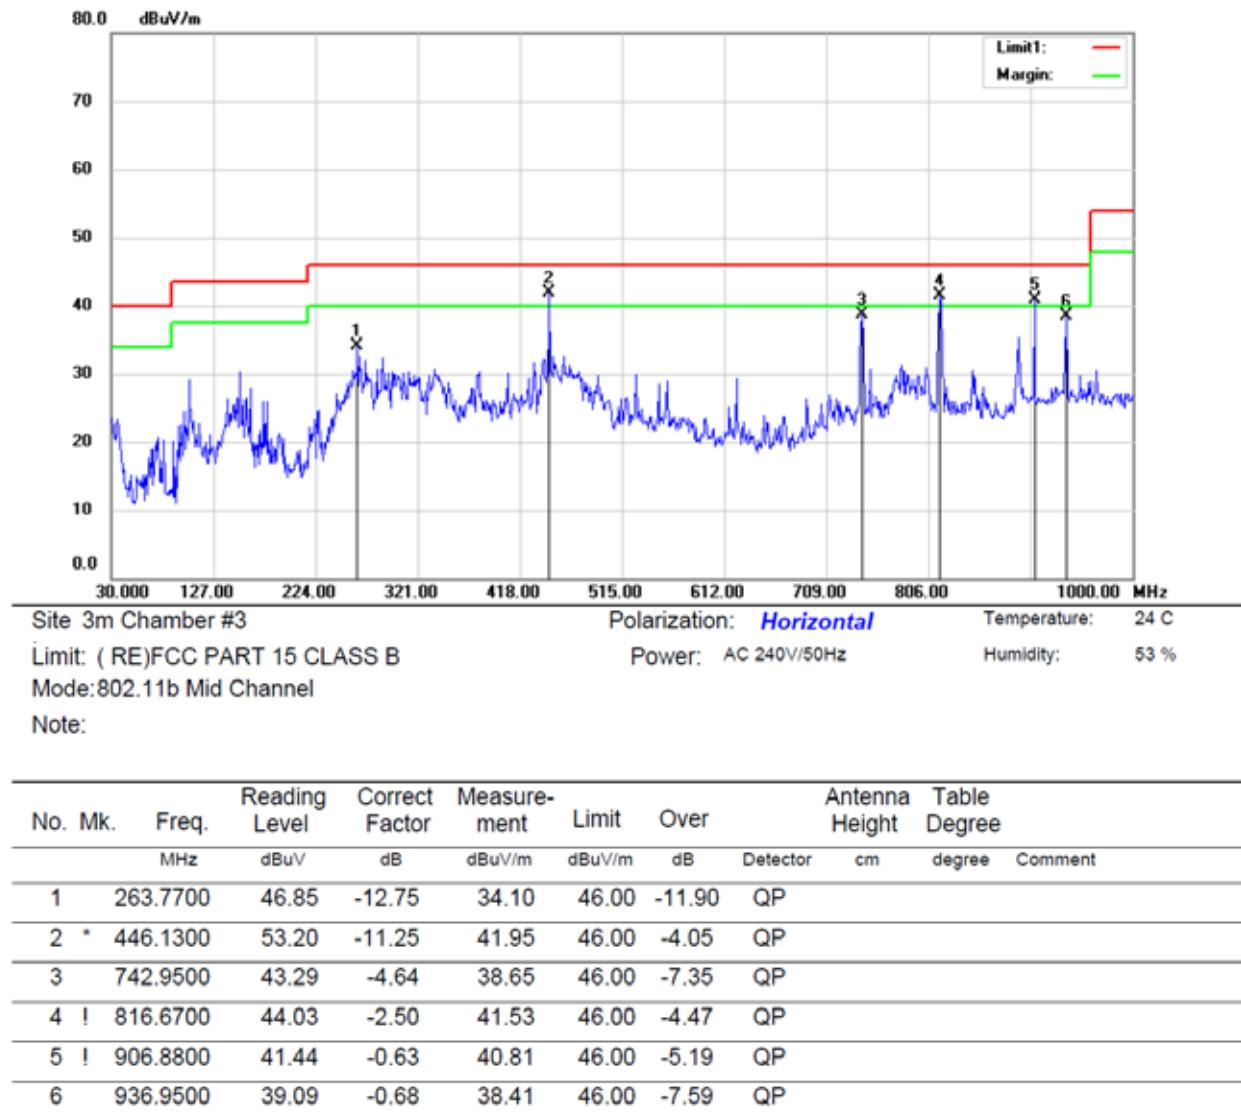

*:Maximum data x:Over limit !:over margin

Operator: KK

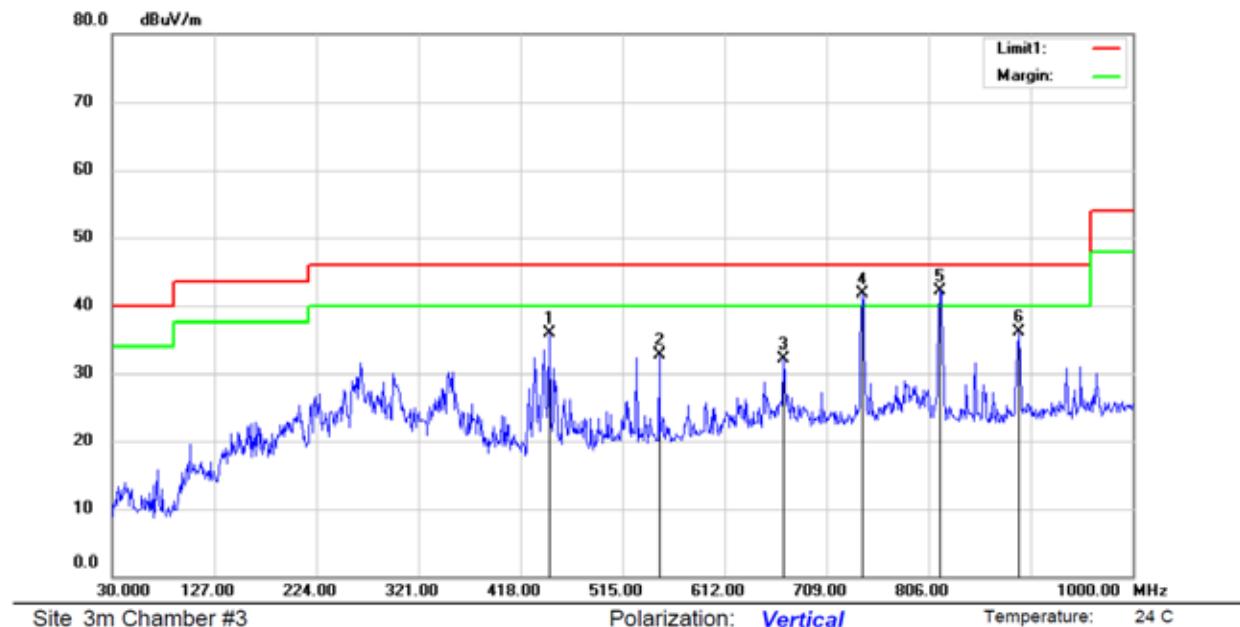

Site 3m Chamber #3

Polarization: **Vertical**

Temperature: 24 C

Limit: (RE)FCC PART 15 CLASS B

Power: AC 240V/50Hz

Humidity: 53 %


Mode:802.11b Mid Channel

Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm		Table Degree	Comment
								Over	Detector		
1		446.1300	47.11	-11.25	35.86	46.00	-10.14	QP			
2		549.9200	40.07	-7.39	32.68	46.00	-13.32	QP			
3		668.2600	38.50	-6.30	32.20	46.00	-13.80	QP			
4	!	742.9500	46.29	-4.64	41.65	46.00	-4.35	QP			
5	*	816.6700	44.57	-2.50	42.07	46.00	-3.93	QP			
6		892.3300	36.89	-0.80	36.09	46.00	-9.91	QP			

*:Maximum data x:Over limit !:over margin


Operator: KK

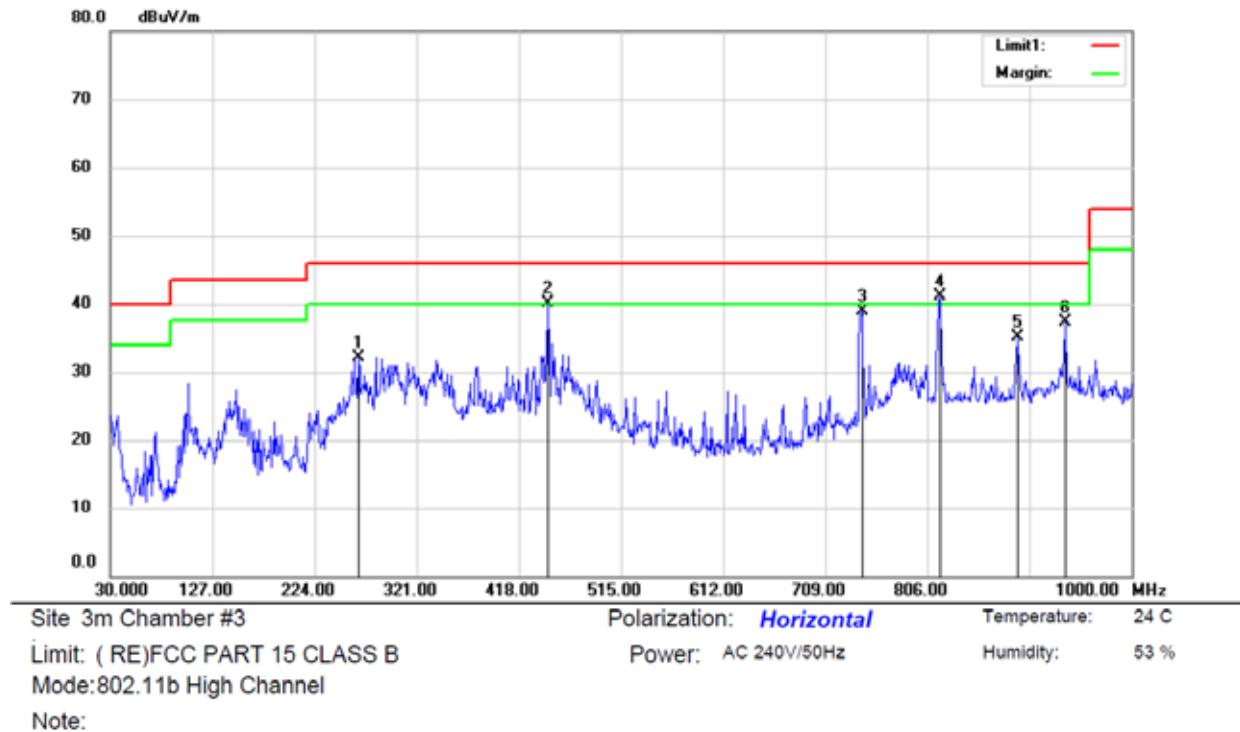

No.	Mk.	Freq. MHz	Reading	Correct	Measure-	Limit	Over	Antenna Height cm	Table Degree	Comment
			Level dBuV	Factor dB	ment dBuV/m					
1		265.7100	44.77	-12.73	32.04	46.00	-13.96	QP		
2	!	446.1300	51.38	-11.25	40.13	46.00	-5.87	QP		
3		743.9200	43.57	-4.62	38.95	46.00	-7.05	QP		
4	*	817.6400	43.62	-2.47	41.15	46.00	-4.85	QP		
5		891.3600	35.88	-0.82	35.06	46.00	-10.94	QP		
6		936.9500	37.92	-0.68	37.24	46.00	-8.76	QP		

*:Maximum data x:Over limit !:over margin

Operator: KK

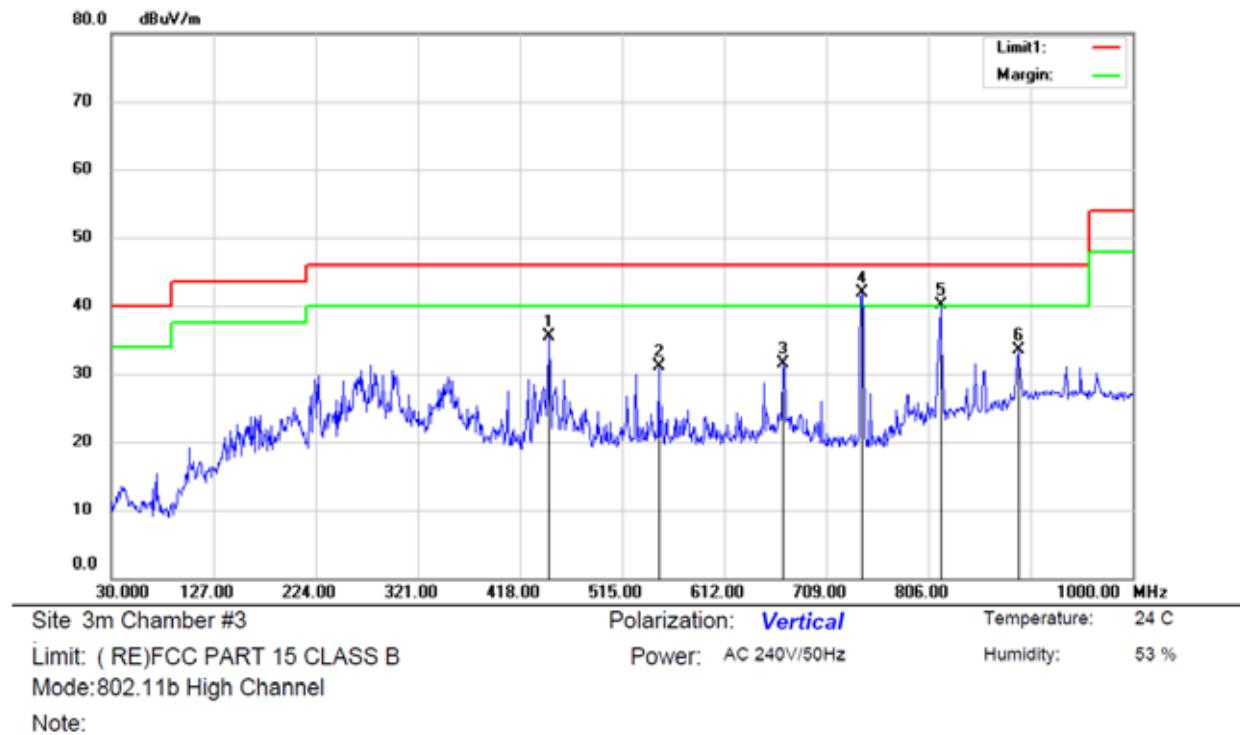

No.	Mk.	Freq. MHz	Reading	Correct	Measure-	Limit	Over	Antenna Height cm	Table Degree	Comment
			Level dBuV	Factor dB	ment dBuV/m					
1		446.1300	46.71	-11.25	35.46	46.00	-10.54	QP		
2		549.9200	38.42	-7.39	31.03	46.00	-14.97	QP		
3		668.2600	37.76	-6.30	31.46	46.00	-14.54	QP		
4	*	742.9500	46.45	-4.64	41.81	46.00	-4.19	QP		
5	!	817.6400	42.51	-2.47	40.04	46.00	-5.96	QP		
6		891.3600	34.24	-0.82	33.42	46.00	-12.58	QP		

*:Maximum data x:Over limit !:over margin

Operator: KK

■ Spurious Emission Above 1GHz (1GHz to 25GHz)

All modes 2.4G 802.11b/g/n have been tested, and the worst result 802.11b recorded was report as below:

Temperature:	24	Test Date:	November 20, 2015
Humidity:	53 %	Test By:	YXL
Test mode:	802.11b	Frequency:	Channel 1: 2412MHz
Test Voltage:	AC 120V/60Hz		

Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Over(dB)	
		PK	AV	PK	AV	PK	AV
14481.00	V	49.69	33.95	74.00	54.00	-24.31	-20.05
15620.00	V	50.96	33.46	74.00	54.00	-23.04	-20.54
16725.00	V	51.76	34.89	74.00	54.00	-22.24	-19.11
--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--
14039.00	H	49.63	34.26	74.00	54.00	-24.37	-19.74
15331.00	H	50.40	34.95	74.00	54.00	-23.60	-19.05
16759.00	H	52.06	36.21	74.00	54.00	-21.94	-17.79

Test mode: 802.11b Frequency: Channel 6: 2437MHz
Test Voltage: AC 120V/60Hz

Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Over(dB)	
		PK	AV	PK	AV	PK	AV
14872.00	V	51.38	35.76	74.00	54.00	-22.62	-18.24
16164.00	V	51.66	35.49	74.00	54.00	-22.34	-18.51
16742.00	V	52.28	37.39	74.00	54.00	-21.72	-16.61
--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--
13767.00	H	49.98	33.59	74.00	54.00	-24.02	-20.41
14753.00	H	51.46	35.16	74.00	54.00	-22.54	-18.84
17745.00	H	52.81	37.41	74.00	54.00	-21.19	-16.59

Test mode: 802.11b Frequency: Channel 11: 2462MHz
Test Voltage: AC 120V/60Hz

Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Over(dB)	
		PK	AV	PK	AV	PK	AV
15280.00	V	50.93	35.28	74.00	54.00	-23.07	-18.72
16045.00	V	51.74	36.17	74.00	54.00	-22.26	-17.83
16980.00	V	52.03	37.34	74.00	54.00	-21.97	-16.66
--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--
15314.00	H	51.14	35.49	74.00	54.00	-22.86	-18.51
16181.00	H	51.31	35.37	74.00	54.00	-22.69	-18.63
17286.00	H	52.34	36.48	74.00	54.00	-21.66	-17.52

Note: (1) All Readings are Peak Value (VBW=3MHz) and Peak Value (VBW=10Hz).

(2) Emission Level= Reading Level+Probe Factor +Cable Loss.

(3) Data of measurement within this frequency range shown " -- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

■ Spurious Emission Above 1GHz (1GHz to 25GHz)

All modes 2.4G 802.11b/g/n have been tested, and the worst result 802.11b recorded was report as below:

Temperature:	24	Test Date:	November 20, 2015
Humidity:	53 %	Test By:	YXL
Test mode:	802.11b	Frequency:	Channel 1: 2412MHz
Test Voltage:	AC 240V/50Hz		

Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Over(dB)	
		PK	AV	PK	AV	PK	AV
14492.00	V	50.75	34.79	74.00	54.00	-23.25	-19.21
15631.00	V	52.02	34.30	74.00	54.00	-21.98	-19.70
16736.00	V	52.82	35.73	74.00	54.00	-21.18	-18.27
--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--
14050.00	H	50.69	35.10	74.00	54.00	-23.31	-18.90
15342.00	H	51.46	35.79	74.00	54.00	-22.54	-18.21
16770.00	H	53.12	37.05	74.00	54.00	-20.88	-16.95

Test mode: 802.11b Frequency: Channel 6: 2437MHz
Test Voltage: AC 240V/50Hz

Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Over(dB)	
		PK	AV	PK	AV	PK	AV
14883.00	V	52.44	36.60	74.00	54.00	-21.56	-17.40
16175.00	V	52.72	36.33	74.00	54.00	-21.28	-17.67
16753.00	V	53.34	38.23	74.00	54.00	-20.66	-15.77
--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--
13778.00	H	51.04	34.43	74.00	54.00	-22.96	-19.57
14764.00	H	52.52	36.00	74.00	54.00	-21.48	-18.00
17756.00	H	53.87	38.25	74.00	54.00	-20.13	-15.75

Test mode: 802.11b Frequency: Channel 11: 2462MHz
Test Voltage: AC 240V/50Hz


Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Over(dB)	
		PK	AV	PK	AV	PK	AV
15291.00	V	51.99	36.12	74.00	54.00	-22.01	-17.88
16056.00	V	52.80	37.01	74.00	54.00	-21.20	-16.99
16991.00	V	53.09	38.18	74.00	54.00	-20.91	-15.82
--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--
15325.00	H	52.20	36.33	74.00	54.00	-21.80	-17.67
16192.00	H	52.37	36.21	74.00	54.00	-21.63	-17.79
17297.00	H	53.40	37.32	74.00	54.00	-20.60	-16.68

Note: (1) All Readings are Peak Value (VBW=3MHz) and Peak Value (VBW=10Hz).

(2) Emission Level= Reading Level+Probe Factor +Cable Loss.


(3) Data of measurement within this frequency range shown " -- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

■ Spurious Emission in Restricted Band 2310-2390MHz and 2483.5-2500MHz

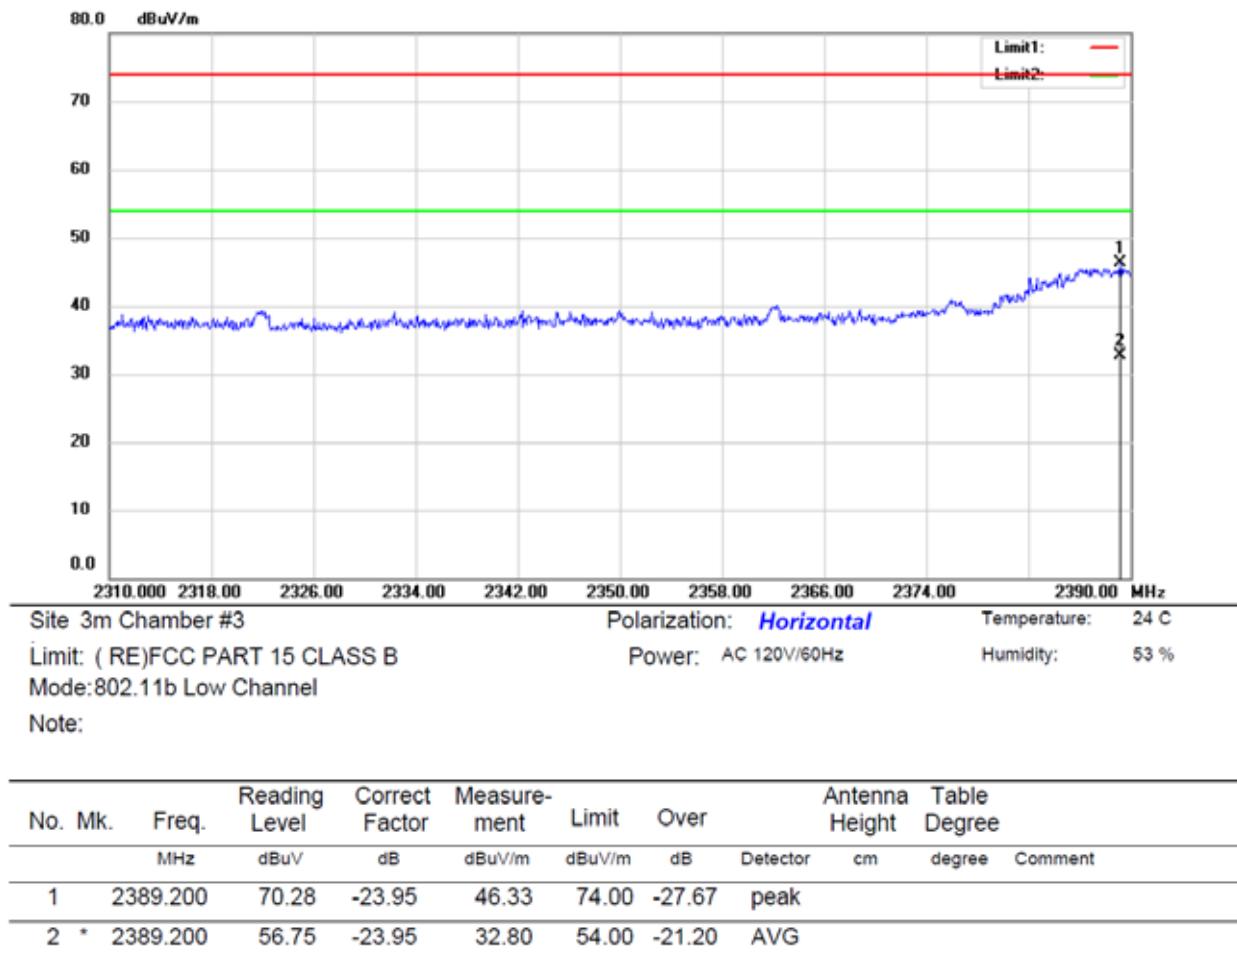

*:Maximum data x:Over limit !:over margin

Operator: KK

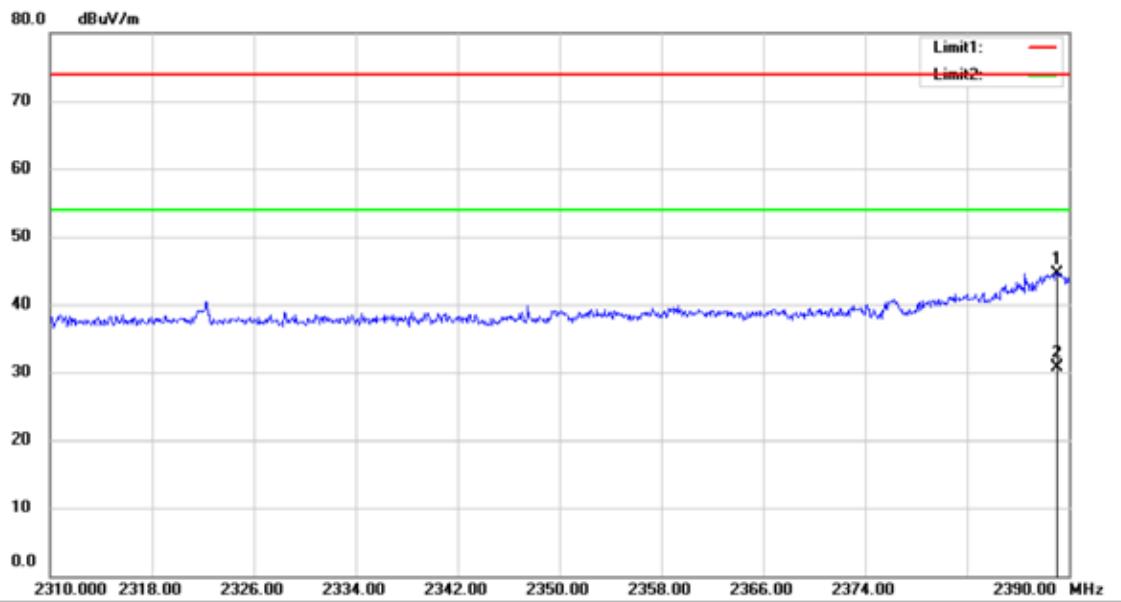

Site 3m Chamber #3

Polarization: **Vertical**

Temperature: 24 C

Limit: (RE)FCC PART 15 CLASS B

Power: AC 120V/60Hz

Humidity: 53 %


Mode:802.11b Low Channel

Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm		Table Degree	
								Detector	degree	Comment	
1		2389.040	68.55	-23.95	44.60	74.00	-29.40	peak			
2	*	2389.040	54.75	-23.95	30.80	54.00	-23.20	AVG			


*:Maximum data x:Over limit !:over margin

Operator: KK

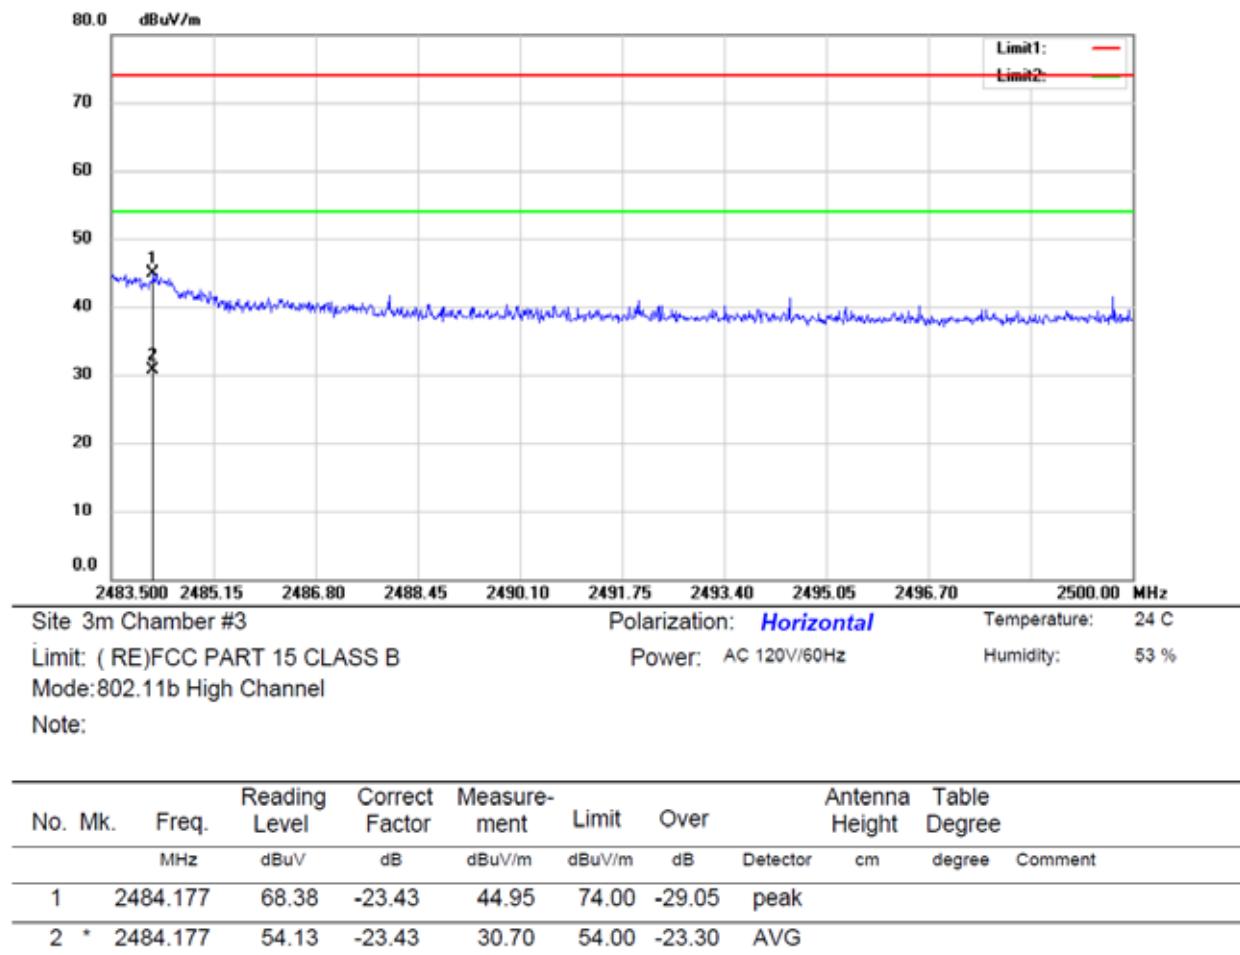


*:Maximum data x:Over limit !:over margin

Operator: KK

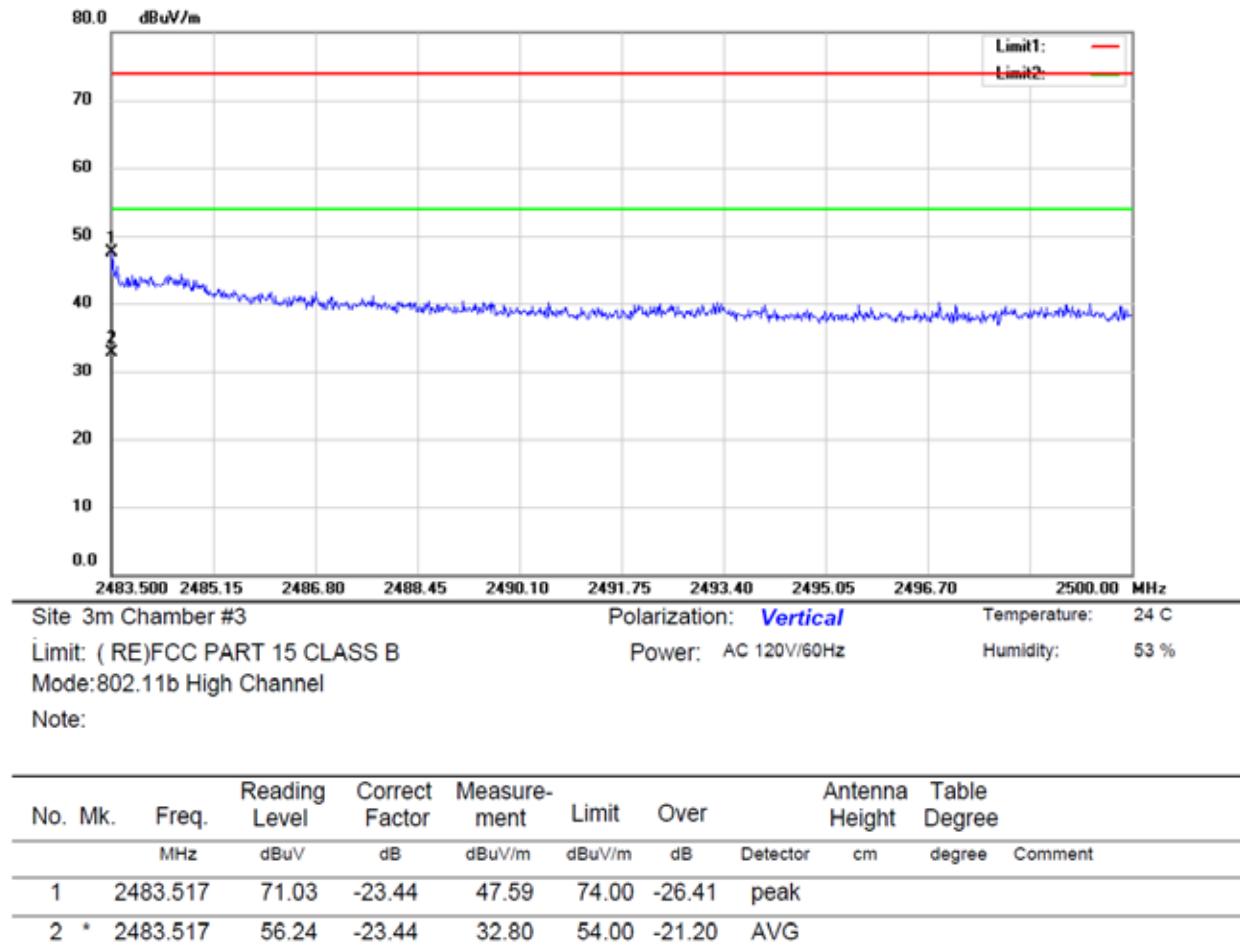

*:Maximum data x:Over limit !:over margin

Operator: KK

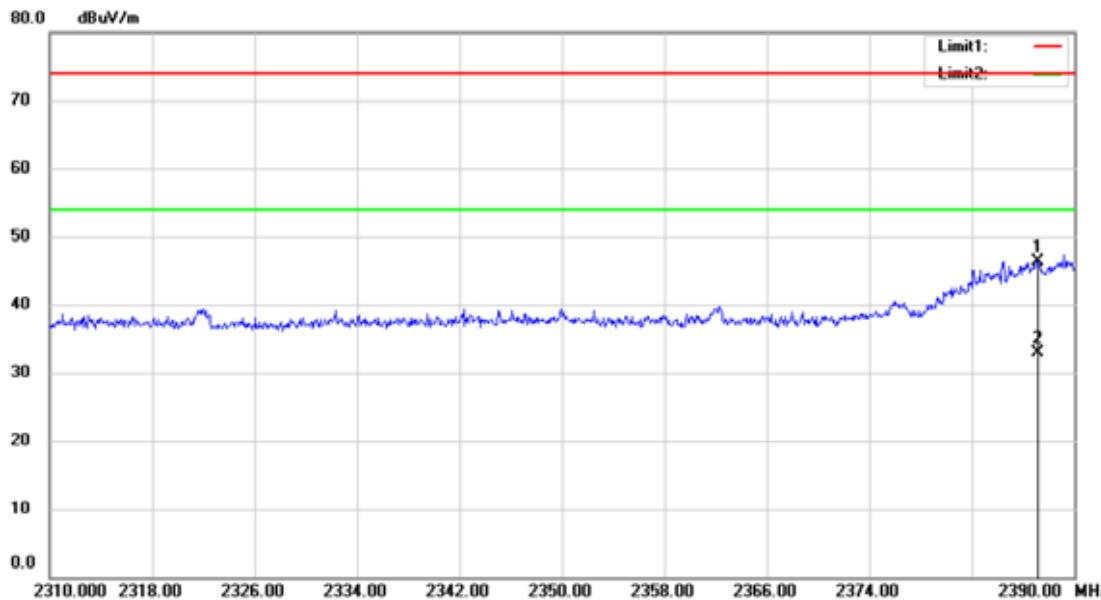

Site 3m Chamber #3

Polarization: **Horizontal**

Temperature: 24 C

Limit: (RE)FCC PART 15 CLASS B

Power: AC 120V/60Hz

Humidity: 53 %


Mode:802.11g Low Channel

Note:

No.	Mk.	Freq. MHz	Reading Level	Correct Factor	Measure- ment	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Comment
			dBuV	dB	dBuV/m					
1		2387.120	70.31	-23.95	46.36	74.00	-27.64	peak		
2	*	2387.120	56.85	-23.95	32.90	54.00	-21.10	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK

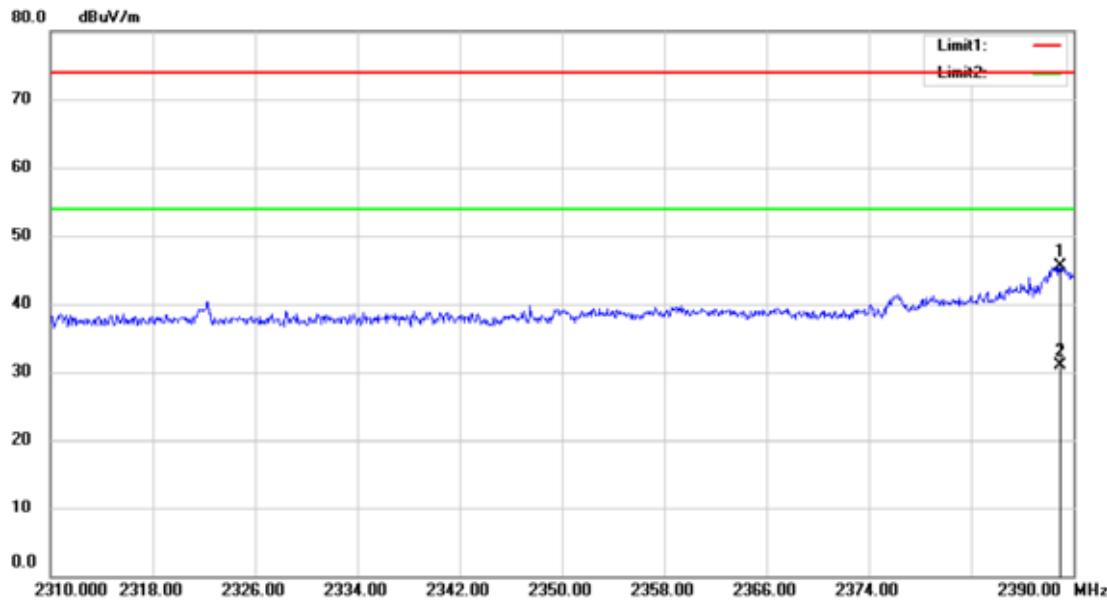

Site 3m Chamber #3

Polarization: **Vertical**

Temperature: 24 C

Limit: (RE)FCC PART 15 CLASS B

Power: AC 120V/60Hz

Humidity: 53 %


Mode:802.11g Low Channel

Note:

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table		
			Level	Factor	ment					Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1		2388.960	69.47	-23.95	45.52	74.00	-28.48	peak			
2	*	2388.960	54.85	-23.95	30.90	54.00	-23.10	AVG			


*:Maximum data x:Over limit !:over margin

Operator: KK

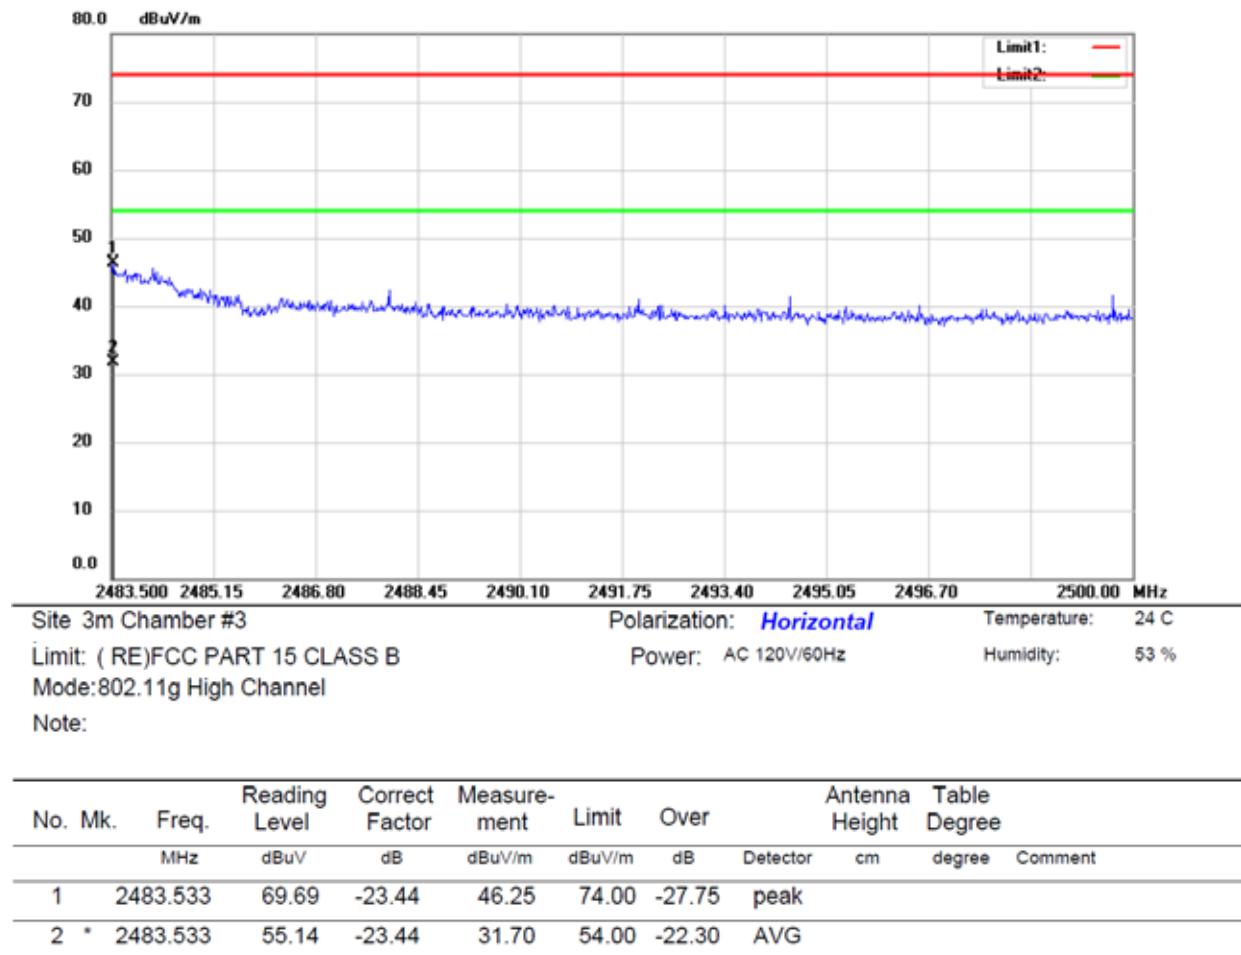


*:Maximum data x:Over limit !:over margin

Operator: KK

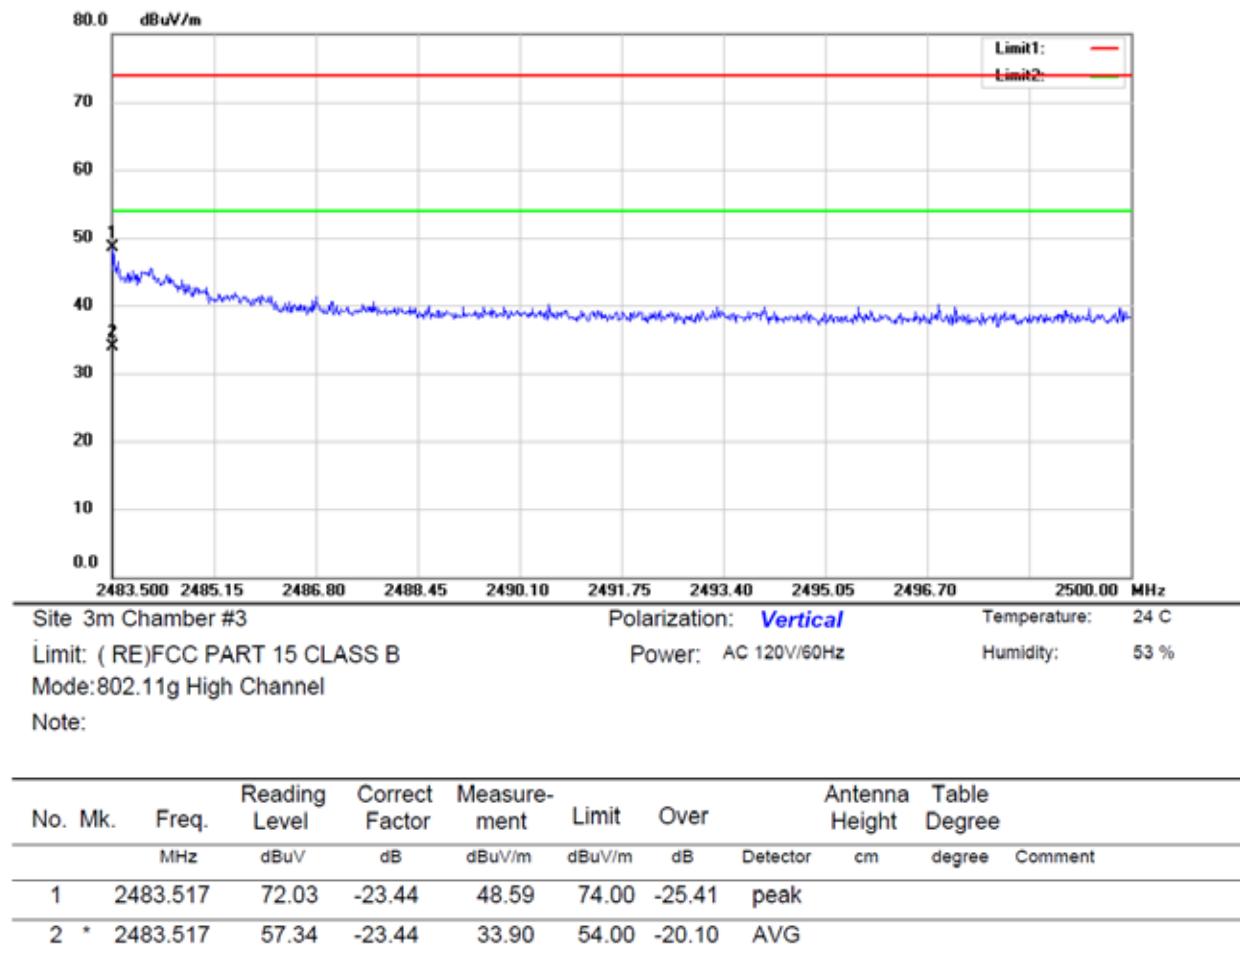

*:Maximum data x:Over limit !:over margin

Operator: KK

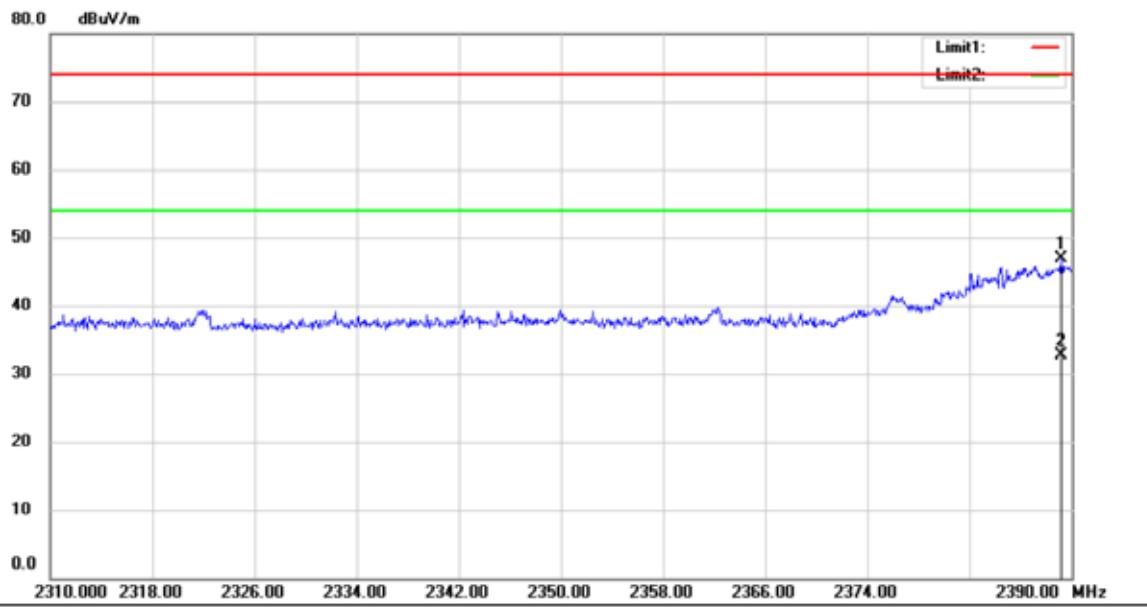

Site 3m Chamber #3

Polarization: **Horizontal**

Temperature: 24 C

Limit: (RE)FCC PART 15 CLASS B

Power: AC 120V/60Hz

Humidity: 53 %


Mode:802.11n HT20 Low Channel

Note:

No.	Mk.	Reading	Correct	Measure-	Limit	Over	Antenna	Table		
		Freq.	Level	Factor						
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1	2389.200	70.78	-23.95	46.83	74.00	-27.17	peak			
2 *	2389.200	56.75	-23.95	32.80	54.00	-21.20	AVG			


*:Maximum data x:Over limit !:over margin

Operator: KK

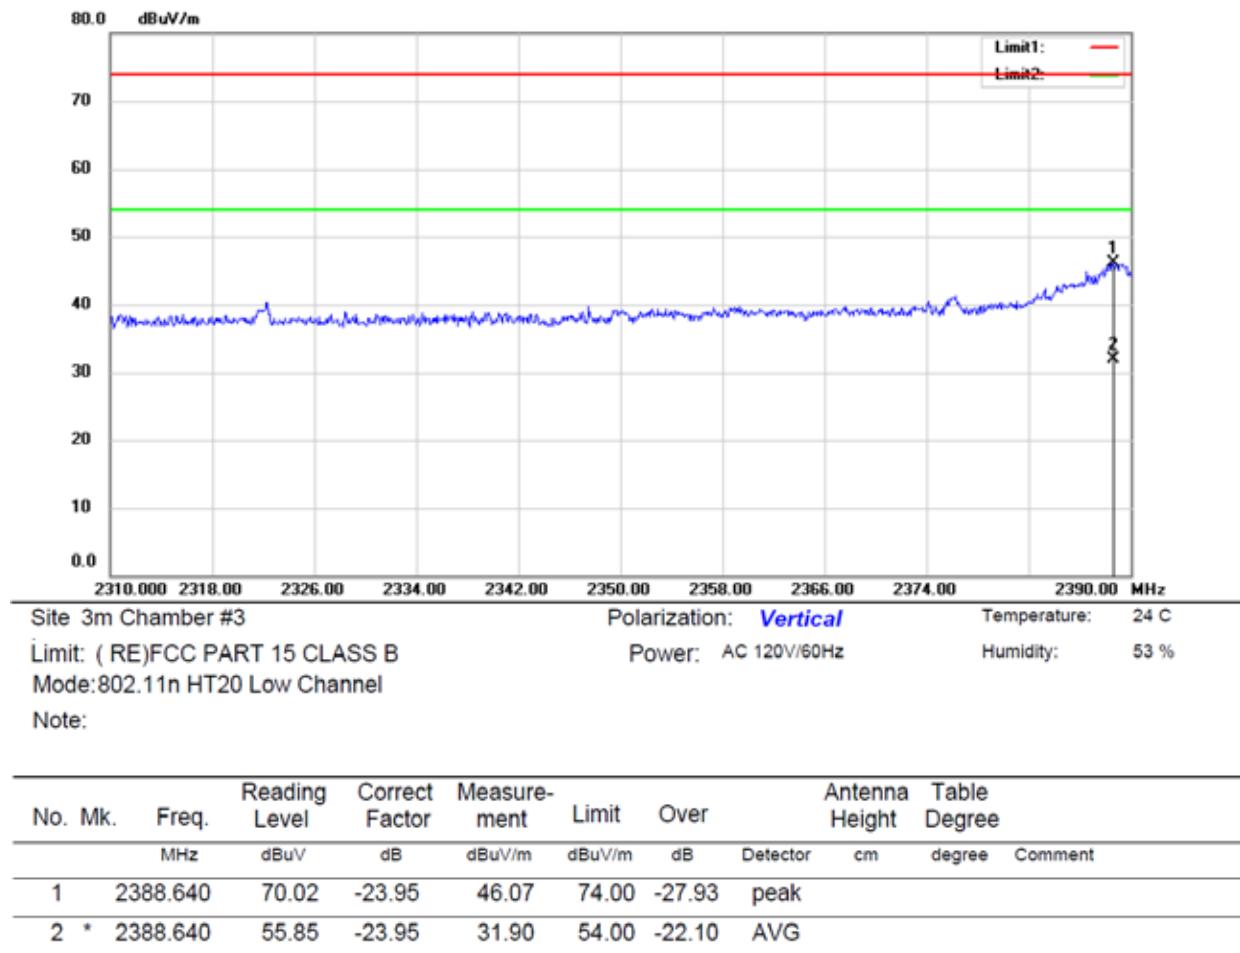


*:Maximum data x:Over limit !:over margin

Operator: KK

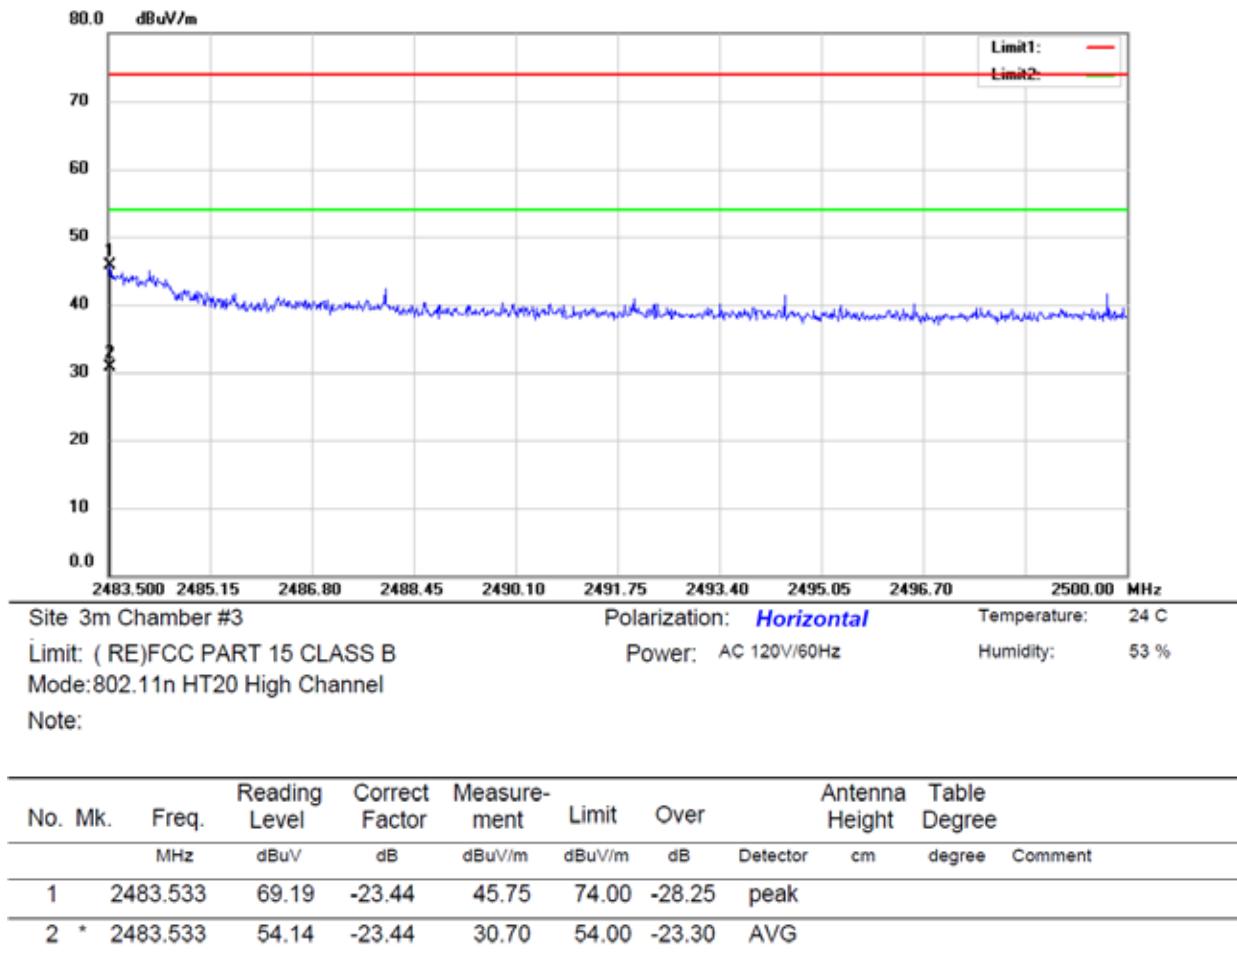


*:Maximum data x:Over limit !:over margin

Operator: KK

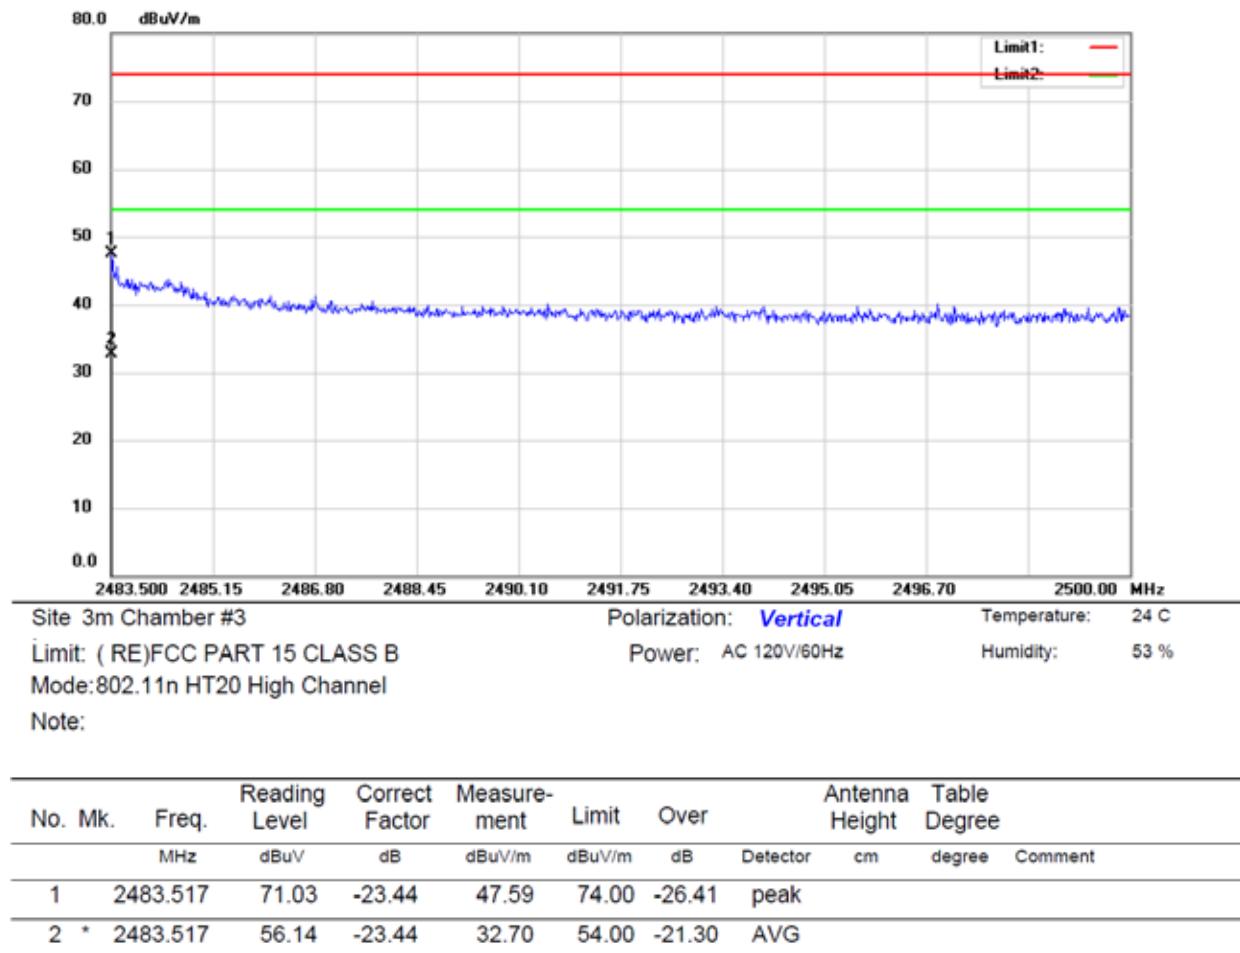

*:Maximum data x:Over limit !:over margin

Operator: KK

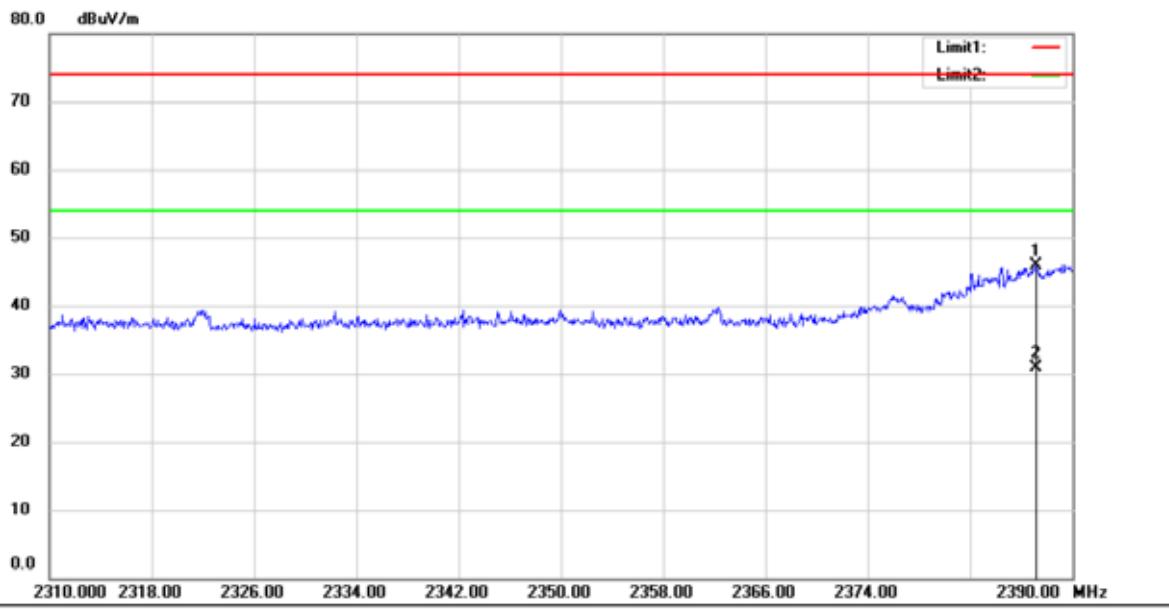

Site 3m Chamber #3

Polarization: **Horizontal**

Temperature: 24 C

Limit: (RE)FCC PART 15 CLASS B

Power: AC 120V/60Hz

Humidity: 53 %


Mode:802.11n HT40 Low Channel

Note:

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table		
			Level	Factor	ment					Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1		2387.120	69.81	-23.95	45.86	74.00	-28.14	peak			
2	*	2387.120	54.85	-23.95	30.90	54.00	-23.10	AVG			

*:Maximum data x:Over limit !:over margin

Operator: KK

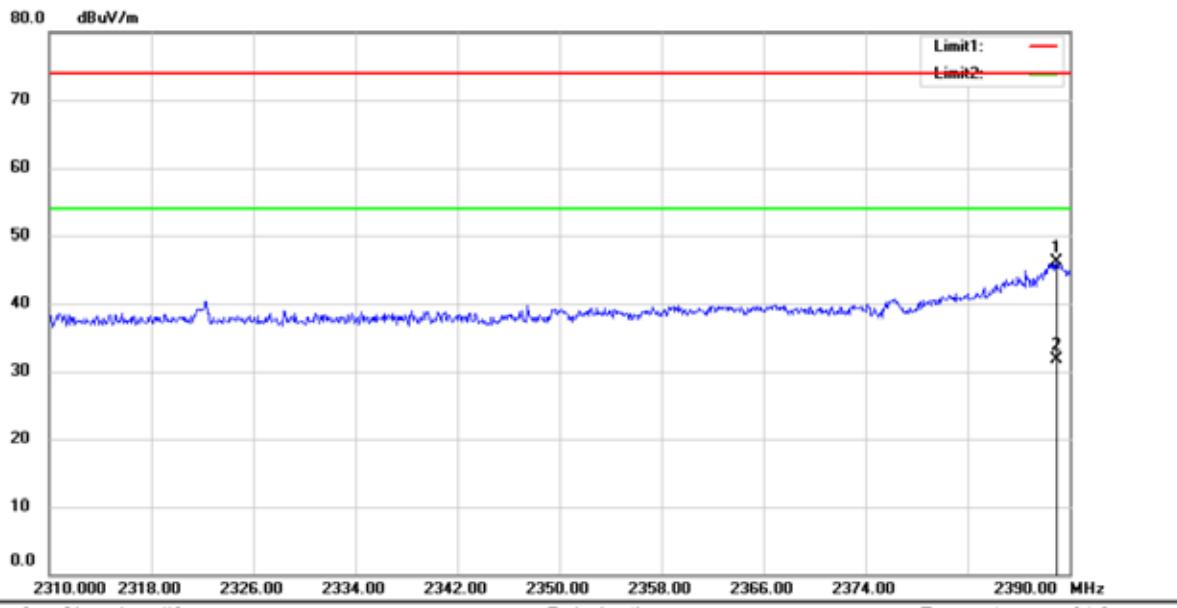

Site 3m Chamber #3

Polarization: **Vertical**

Temperature: 24 C

Limit: (RE)FCC PART 15 CLASS B

Power: AC 120V/60Hz

Humidity: 53 %


Mode:802.11n HT40 Low Channel

Note:

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table	
			Level	Factor	ment					
		MHz	dBuV	dB	dBuV/m	dB	Detector	cm	degree	Comment
1		2388.960	69.97	-23.95	46.02	74.00	-27.98	peak		
2	*	2388.960	55.75	-23.95	31.80	54.00	-22.20	AVG		


*:Maximum data x:Over limit !:over margin

Operator: KK

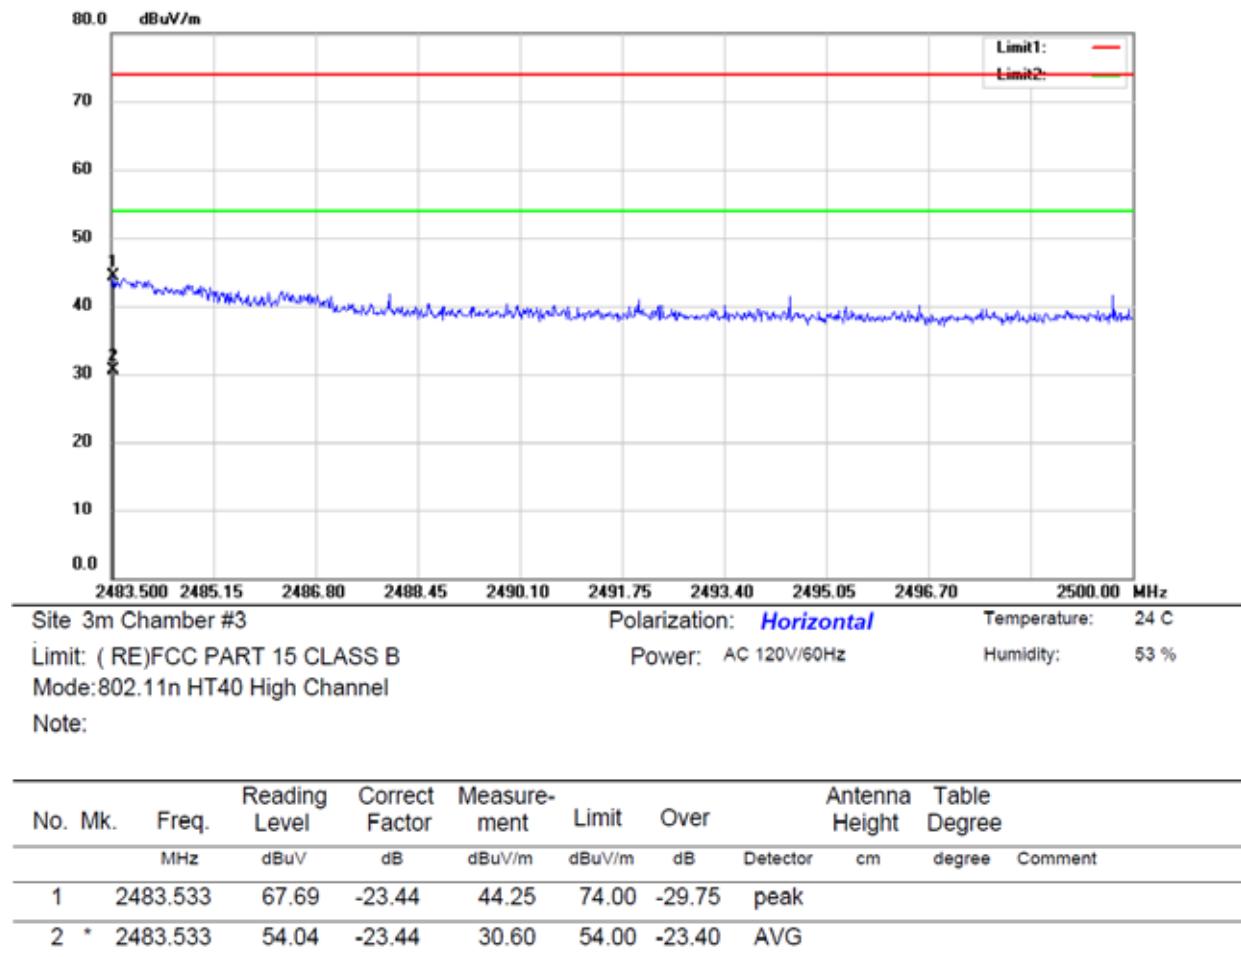

*:Maximum data x:Over limit !:over margin

Operator: KK

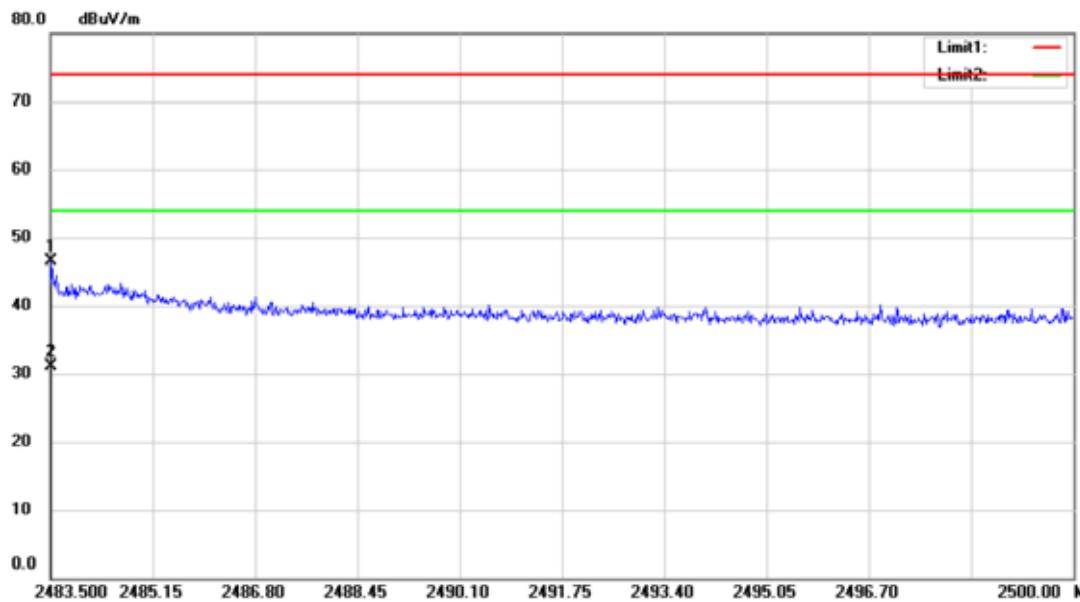

Site 3m Chamber #3

Polarization: **Vertical**

Temperature: 24 C

Limit: (RE)FCC PART 15 CLASS B

Power: AC 120V/60Hz

Humidity: 53 %

Mode: 802.11n HT40 High Channel

Note:

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table		
			Level	Factor	ment					Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1		2483.517	70.03	-23.44	46.59	74.00	-27.41	peak			
2	*	2483.517	54.64	-23.44	31.20	54.00	-22.80	AVG			

*:Maximum data x:Over limit !:over margin

Operator: KK

8.6 CONDUCTED EMISSION TEST

8.6.1 Applicable Standard

According to FCC Part 15.207(a)

8.6.2 Conformance Limit

Conducted Emission Limit		
Frequency(MHz)	Quasi-peak	Average
0.15-0.5	66-56	56-46
0.5-5.0	56	46
5.0-30.0	60	50

Note: 1. The lower limit shall apply at the transition frequencies
2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

8.6.3 Test Configuration

Test according to clause 7.3 conducted emission test setup

8.6.4 Test Procedure


The EUT was placed on a table which is 0.8m above ground plane.

Maximum procedure was performed on the highest emissions to ensure EUT compliance.

Repeat above procedures until all frequency measured were complete.

8.6.5 Test Results

PASS.

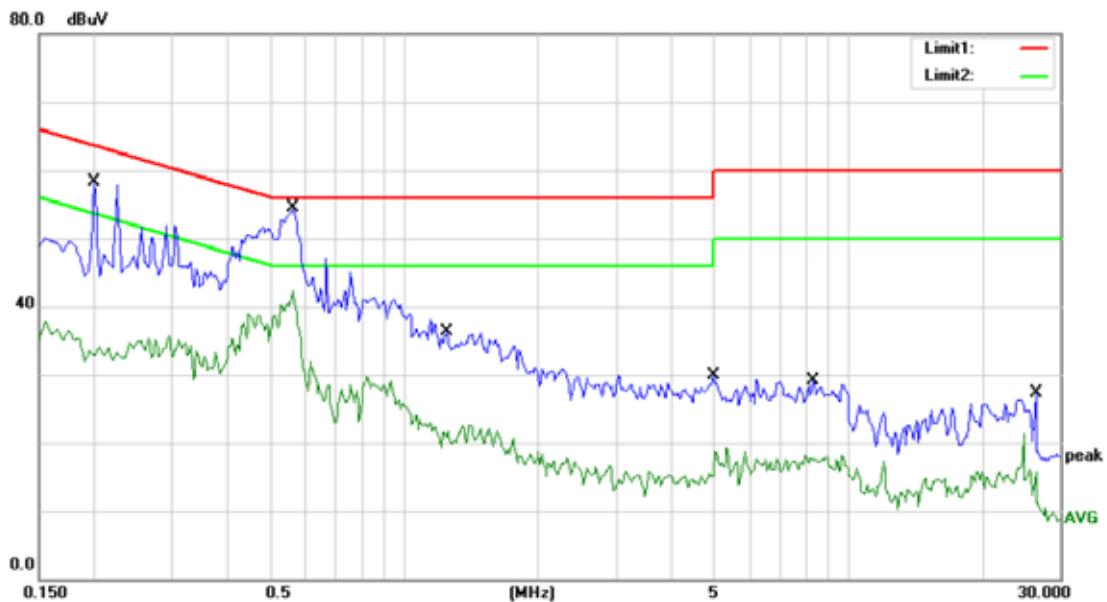

Site Conduction #1

Phase: **L1**

Temperature: 22

Limit: (CE)FCC PART 15 class B_QP

Power: AC 120V/60Hz


Humidity: 50 %

Mode: ON

Note:

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Detector	Comment
			Level	Factor	ment				
1		0.2000	58.38	0.00	58.38	63.61	-5.23	QP	
2		0.2000	35.70	0.00	35.70	53.61	-17.91	AVG	
3		0.5600	50.46	0.00	50.46	56.00	-5.54	QP	
4	*	0.5600	42.38	0.00	42.38	46.00	-3.62	AVG	
5		1.2450	36.29	0.00	36.29	56.00	-19.71	QP	
6		1.2450	22.83	0.00	22.83	46.00	-23.17	AVG	
7		4.9650	29.89	0.00	29.89	56.00	-26.11	QP	
8		4.9650	19.32	0.00	19.32	46.00	-26.68	AVG	
9		8.3600	29.02	0.00	29.02	60.00	-30.98	QP	
10		8.3600	18.03	0.00	18.03	50.00	-31.97	AVG	
11		26.4750	27.27	0.00	27.27	60.00	-32.73	QP	
12		26.4750	21.38	0.00	21.38	50.00	-28.62	AVG	

*:Maximum data x:Over limit !:over margin Comment: Factor build in receiver. Operator: CSL

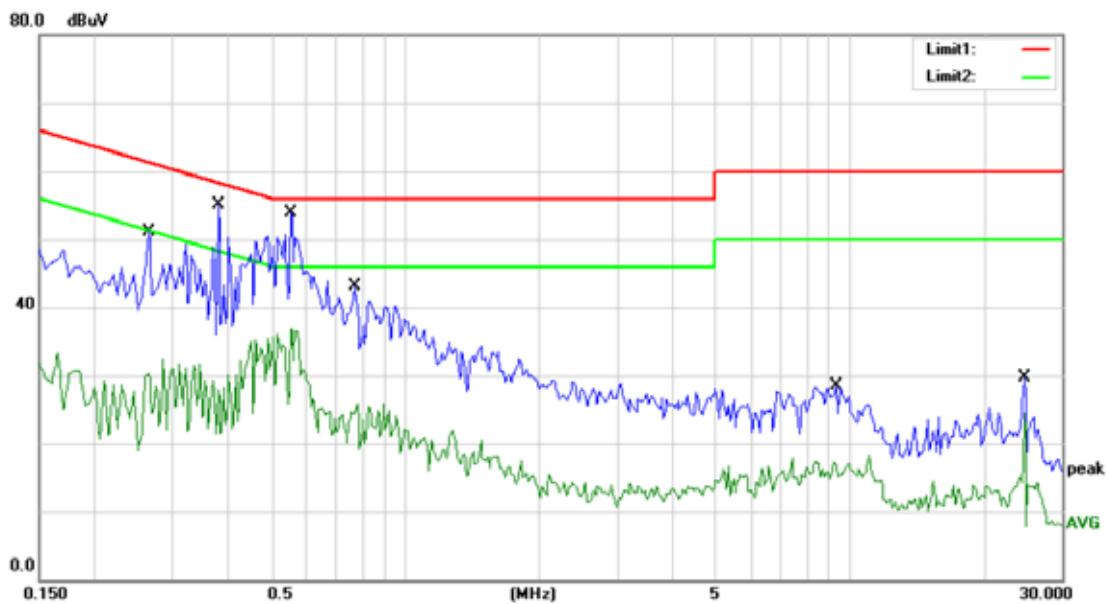

Site Conduction #1

Phase: **N**

Temperature: 22

Limit: (CE)FCC PART 15 class B_QP

Power: AC 120V/60Hz


Humidity: 50 %

Mode: ON

Note:

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Detector	Comment
			Level	Factor	ment				
1		0.2650	51.20	0.00	51.20	61.27	-10.07	QP	
2		0.2650	32.46	0.00	32.46	51.27	-18.81	AVG	
3		0.3800	52.16	0.00	52.16	58.28	-6.12	QP	
4		0.3800	35.09	0.00	35.09	48.28	-13.19	AVG	
5	*	0.5550	50.97	0.00	50.97	56.00	-5.03	QP	
6		0.5550	36.82	0.00	36.82	46.00	-9.18	AVG	
7		0.7700	43.07	0.00	43.07	56.00	-12.93	QP	
8		0.7700	25.96	0.00	25.96	46.00	-20.04	AVG	
9		9.3400	28.56	0.00	28.56	60.00	-31.44	QP	
10		9.3400	17.37	0.00	17.37	50.00	-32.63	AVG	
11		24.7500	29.61	0.00	29.61	60.00	-30.39	QP	
12		24.7500	24.55	0.00	24.55	50.00	-25.45	AVG	

*:Maximum data x:Over limit !:over margin Comment: Factor build in receiver. Operator: CSL

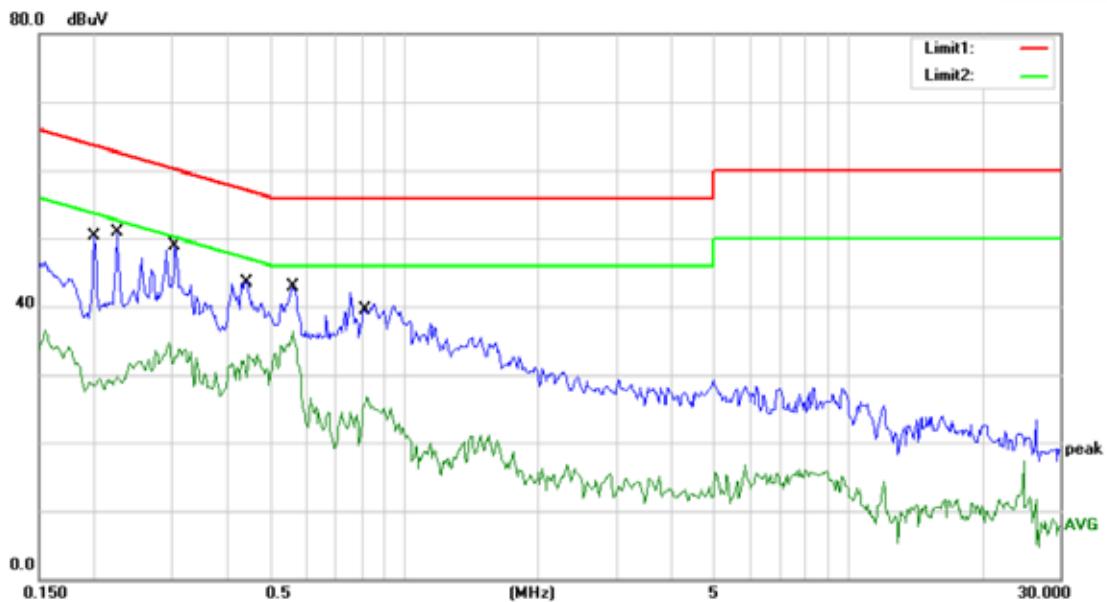

Site Conduction #1

Phase: **L1**

Temperature: 22

Limit: (CE)FCC PART 15 class B_QP

Power: AC 240V/50Hz


Humidity: 50 %

Mode: ON

Note:

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Detector	Comment
			Level	Factor	ment				
		MHz	dBuV	dB	dBuV	dBuV	dB		
1		0.2000	50.38	0.00	50.38	63.61	-13.23	QP	
2		0.2000	29.56	0.00	29.56	53.61	-24.05	AVG	
3		0.2250	50.82	0.00	50.82	62.63	-11.81	QP	
4		0.2250	31.95	0.00	31.95	52.63	-20.68	AVG	
5		0.3050	48.91	0.00	48.91	60.11	-11.20	QP	
6		0.3050	33.79	0.00	33.79	50.11	-16.32	AVG	
7		0.4400	43.59	0.00	43.59	57.06	-13.47	QP	
8		0.4400	32.94	0.00	32.94	47.06	-14.12	AVG	
9		0.5600	42.96	0.00	42.96	56.00	-13.04	QP	
10	*	0.5600	36.38	0.00	36.38	46.00	-9.62	AVG	
11		0.8250	40.31	0.00	40.31	56.00	-15.69	QP	
12		0.8250	26.76	0.00	26.76	46.00	-19.24	AVG	

*:Maximum data x:Over limit !:over margin Comment: Factor build in receiver. Operator: CSL

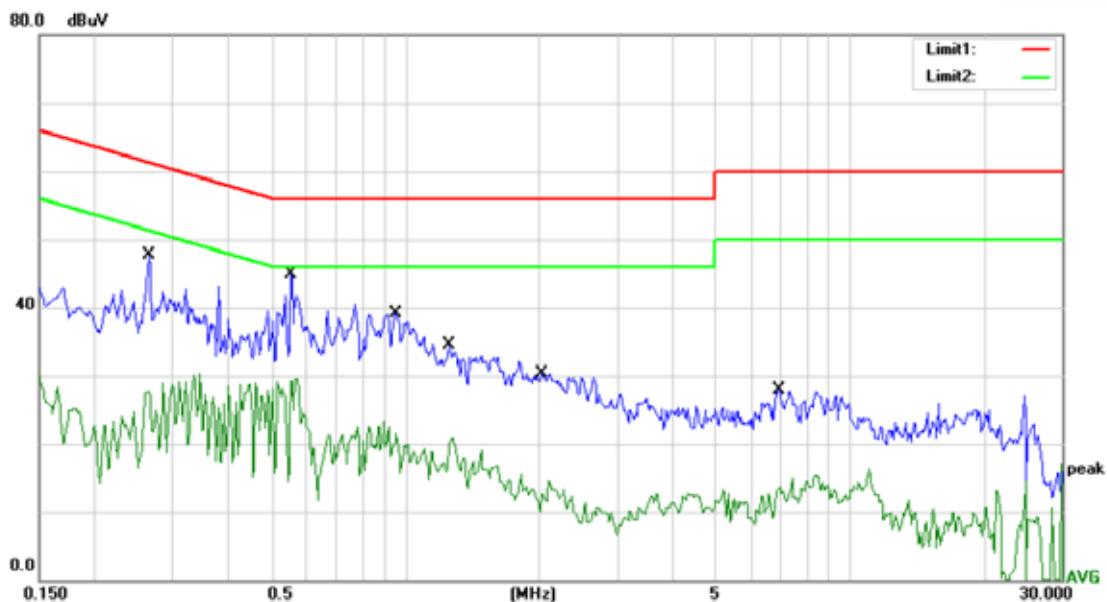

Site Conduction #1

Phase: **N**

Temperature: 22

Limit: (CE)FCC PART 15 class B_QP

Power: AC 240V/50Hz

Humidity: 50 %

Mode: ON

Note:

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Detector	Comment
			Level	Factor	ment				
		MHz	dBuV	dB	dBuV	dBuV	dB		
1		0.2650	47.70	0.00	47.70	61.27	-13.57	QP	
2		0.2650	27.73	0.00	27.73	51.27	-23.54	AVG	
3	*	0.5550	44.97	0.00	44.97	56.00	-11.03	QP	
4		0.5550	29.32	0.00	29.32	46.00	-16.68	AVG	
5		0.9550	39.07	0.00	39.07	56.00	-16.93	QP	
6		0.9550	21.51	0.00	21.51	46.00	-24.49	AVG	
7		1.2500	34.45	0.00	34.45	56.00	-21.55	QP	
8		1.2500	20.86	0.00	20.86	46.00	-25.14	AVG	
9		2.0250	30.26	0.00	30.26	56.00	-25.74	QP	
10		2.0250	14.53	0.00	14.53	46.00	-31.47	AVG	
11		6.9500	27.91	0.00	27.91	60.00	-32.09	QP	
12		6.9500	13.60	0.00	13.60	50.00	-36.40	AVG	

*:Maximum data x:Over limit !:over margin Comment: Factor build in receiver. Operator: CSL

8.7 ANTENNA APPLICATION

8.7.1 Antenna Requirement

Standard	Requirement
FCC CRF Part 15.203	An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §15.211, §15.213, §15.217, §15.219, or §15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

8.7.2 Result

The EUT'S antenna is PCB antenna, and the antenna can't be replaced by the user, which in accordance to section 15.203, please refer to the internal photos. The antenna's gain is 2dBi and meets the requirement.

END OF REPORT