


# FCC Test Report

**FCC ID** : 2AGLL-2EGEN2  
**Equipment** : DHSK-AF20  
**Model No.** : DHSK-AF20  
**Brand Name** : Afero  
**Applicant** : Afero Inc.  
**Address** : 4410 El Camino Real, Suite 200, Los Altos, CA,  
94022  
**Standard** : 47 CFR FCC Part 15.247  
**Received Date** : Apr. 19, 2023  
**Tested Date** : May 23 ~ Jul. 10, 2023

We, International Certification Corporation, would like to declare that the tested sample has been evaluated and in compliance with the requirement of the above standards. The test results contained in this report refer exclusively to the product. It shall not be reproduced except in full without the written approval of our laboratory.

Reviewed by:

Approved by:

  
\_\_\_\_\_  
Along Chen / Assistant Manager

  
\_\_\_\_\_  
Gary Chang / Manager

---

## Table of Contents

<b>1</b>	<b>GENERAL DESCRIPTION .....</b>	<b>5</b>
1.1	Information.....	5
1.2	Local Support Equipment List .....	7
1.3	Test Setup Chart .....	7
1.4	The Equipment List .....	8
1.5	Test Standards .....	10
1.6	Reference Guidance .....	10
1.7	Deviation from Test Standard and Measurement Procedure.....	10
1.8	Measurement Uncertainty .....	10
<b>2</b>	<b>TEST CONFIGURATION.....</b>	<b>11</b>
2.1	Testing Facility .....	11
2.2	The Worst Test Modes and Channel Details .....	11
<b>3</b>	<b>TRANSMITTER TEST RESULTS .....</b>	<b>12</b>
3.1	6dB and Occupied Bandwidth .....	12
3.2	Conducted Output Power .....	13
3.3	Power Spectral Density .....	14
3.4	Unwanted Emissions into Restricted Frequency Bands .....	15
3.5	Emissions in Non-Restricted Frequency Bands.....	17
3.6	AC Power Line Conducted Emissions .....	18
<b>4</b>	<b>TEST LABORATORY INFORMATION .....</b>	<b>19</b>

**Appendix A. 6dB and Occupied Bandwidth**

**Appendix B. Conducted Output Power**

**Appendix C. Power Spectral Density**

**Appendix D. Unwanted Emissions into Restricted Frequency Bands**

**Appendix E. Emissions in Non-Restricted Frequency Bands**

**Appendix F. AC Power Line Conducted Emissions**

---

## Release Record

Report No.	Version	Description	Issued Date
FR341901AC	Rev. 01	Initial issue	Aug. 25, 2023

## Summary of Test Results

FCC Rules	Test Items	Measured	Result
15.207	AC Power Line Conducted Emission	[dBuV]:0.529MHz 32.98 (Margin -13.02dB) - AV	Pass
15.247(d) 15.209	Unwanted Emissions	[dBuV/m at 3m]: 2483.50MHz 52.95 (Margin -1.05dB) - AV	Pass
15.247(b)(3)	Conducted Output Power	Max Power [dBm]: 25.87	Pass
15.247(a)(2)	6dB Bandwidth	Meet the requirement of limit	Pass
15.247(e)	Power Spectral Density	Meet the requirement of limit	Pass
15.203	Antenna Requirement	Meet the requirement of limit	Pass

### Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

### Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

# 1 General Description

## 1.1 Information

### 1.1.1 Specification of the Equipment under Test (EUT)

RF General Information					
Frequency Range (MHz)	IEEE Std. 802.11	Ch. Freq. (MHz)	Channel Number	Transmit Chains (N <sub>TX</sub> )	Data Rate / MCS
2400-2483.5	b	2412-2462	1-11 [11]	1	1-11 Mbps
2400-2483.5	g	2412-2462	1-11 [11]	1	6-54 Mbps
2400-2483.5	n (HT20)	2412-2462	1-11 [11]	1	MCS 0-7

Note 1: RF output power specifies that Maximum Conducted (Average) Output Power.  
 Note 2: DSSS-DBPSK, DQPSK, CCK modulation  
 OFDMBPSK, QPSK, 16QAM and 64QAM modulation.

### 1.1.2 Antenna Details

Ant. No.	Brand	Model	Type	Connector	Gain (dBi)
1	WNC	DHSK-AF20_ANT	PIFA	No	1.37

### 1.1.3 Power Supply Type of Equipment under Test (EUT)

<b>Power Supply Type</b>	5Vdc from host
--------------------------	----------------

### 1.1.4 Accessories

N/A

### 1.1.5 Channel List

Channel	Frequency(MHz)
1	2412
2	2417
3	2422
4	2427
5	2432
6	2437
7	2442
8	2447
9	2452
10	2457
11	2462

### 1.1.6 Test Tool and Duty Cycle

Test Tool	AmebaZ2_mptool_1V3, Version: 1V3		
Duty Cycle and Duty Factor	Mode	Duty Cycle (%)	Duty Factor (dB)
	11b	100.00%	0.00
	11g	95.27%	0.21
	HT20	94.91%	0.23


### 1.1.7 Power Index of Test Tool

Modulation Mode	Test Frequency (MHz)	Power Index
11b	2412	108
11b	2437	120
11b	2462	104
11g	2412	100
11g	2437	125
11g	2462	97
HT20	2437	97
HT20	2462	120
HT20	2437	97

## 1.2 Local Support Equipment List

Support Equipment List					
No.	Equipment	Brand	Model	FCC ID	Remarks
1	Laptop	DELL	Latitude E5470	DoC	---
2	USB Cable	ICC	extension	---	
3	Fixture	---	---	---	Provided by applicant.

## 1.3 Test Setup Chart

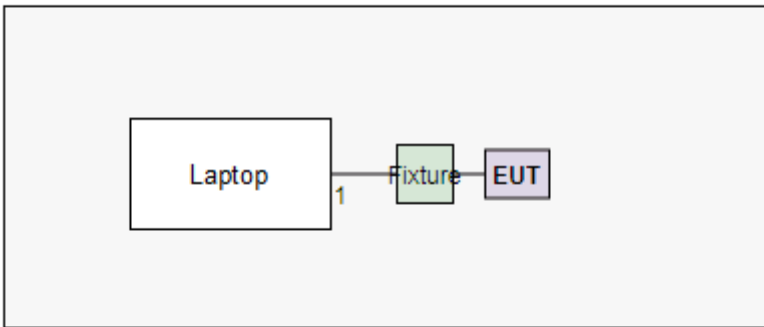Test Setup Diagram	
 <pre> graph LR     Laptop[Laptop] --- 1  Fixture[Fixture]     Fixture --- EUT[EUT]             </pre>	
No.	Signal cable / Length (m)
1	USB Cable (extension), 1m shielded.

## 1.4 The Equipment List

<b>Test Item</b>	Conducted Emission				
<b>Test Site</b>	Conduction room 1 / (CO01-WS)				
<b>Tested Date</b>	May 23, 2023				
<b>Instrument</b>	<b>Brand</b>	<b>Model No.</b>	<b>Serial No.</b>	<b>Calibration Date</b>	<b>Calibration Until</b>
Receiver	R&S	ESR3	101658	Feb. 17, 2023	Feb. 16, 2024
LISN	R&S	ENV216	101295	Jan. 31, 2023	Jan. 30, 2024
LISN (Support Unit)	SCHWARZBECK	Schwarzbeck 8127	8127667	Jan .03, 2023	Jan .02, 2024
RF Cable-CON	Woken	CFD200-NL	CFD200-NL-001	Oct. 17, 2022	Oct. 16, 2023
50 ohm terminal (Support Unit)	NA	50	03	Jun. 08, 2022	Jun. 07, 2023
Measurement Software	AUDIX	e3	6.120210k	NA	NA
Measurement Software	Sporton	SENSE-EMI	V5.10.8.7	NA	NA
Note: Calibration Interval of instruments listed above is one year.					

<b>Test Item</b>	RF Conducted				
<b>Test Site</b>	(TH01-WS)				
<b>Tested Date</b>	Jul. 10, 2023				
<b>Instrument</b>	<b>Brand</b>	<b>Model No.</b>	<b>Serial No.</b>	<b>Calibration Date</b>	<b>Calibration Until</b>
Spectrum Analyzer	R&S	FSV40	101910	Apr. 14, 2023	Apr. 13, 2024
Power Meter	Anritsu	ML2495A	1241002	Nov. 23, 2022	Nov. 22, 2023
Power Sensor	Anritsu	MA2411B	1207366	Nov. 23, 2022	Nov. 22, 2023
Measurement Software	Sporton	SENSE-15247_DTS	V5.11	NA	NA
Attenuator	Pasternack	PE7005-10	10-2	Oct. 06, 2022	Oct. 05, 2023
Note: Calibration Interval of instruments listed above is one year.					



<b>Test Item</b>	Radiated Emission				
<b>Test Site</b>	966 chamber1 / (03CH01-WS)				
<b>Tested Date</b>	Jul. 04, 2023				
<b>Instrument</b>	<b>Brand</b>	<b>Model No.</b>	<b>Serial No.</b>	<b>Calibration Date</b>	<b>Calibration Until</b>
Receiver	R&S	ESR3	101657	Mar. 03, 2023	Mar. 02, 2024
Spectrum Analyzer	R&S	FSV40	101498	Nov. 21, 2022	Nov. 20, 2023
Loop Antenna	R&S	HFH2-Z2	100330	Nov. 01, 2022	Oct. 31, 2023
Bilog Antenna	SCHWARZBECK	VULB9168	VULB9168-522	Aug. 03, 2022	Aug. 02, 2023
Horn Antenna 1G-18G	SCHWARZBECK	BBHA 9120 D	BBHA 9120 D 1096	Nov. 25, 2022	Nov. 24, 2023
Horn Antenna 18G-40G	SCHWARZBECK	BBHA 9170	BBHA 9170517	Oct. 27, 2022	Oct. 26, 2023
Preamplifier	EMC	EMC02325	980225	Jun. 28, 2023	Jun. 27, 2024
Preamplifier	EMC	EMC118A45SE	980898	Jul. 16, 2022	Jul. 15, 2023
Preamplifier	EMC	EMC184045SE	980903	Jul. 16, 2022	Jul. 15, 2023
Loop Antenna Cable	KOAX KABEL	101354-BW	101354-BW	Oct. 04, 2022	Oct. 03, 2023
LF cable 3M	Woken	CFD400NL-LW	CFD400NL-001	Oct. 04, 2022	Oct. 03, 2023
LF cable 11M	EMC	EMCCFD400-NW-N W-11000	200801	Oct. 04, 2022	Oct. 03, 2023
LF cable 1M	EMC	EMCCFD400-NM-N M-1000	160502	Oct. 04, 2022	Oct. 03, 2023
RF Cable	EMC	EMC104-35M-35M- 8000	210920	Oct. 04, 2022	Oct. 03, 2023
RF Cable	EMC	EMC104-35M-35M- 3000	210922	Oct. 04, 2022	Oct. 03, 2023
HIGHPASS FILTER 3.1-18G	WHK	WHK3.1/18G-10SS	39	Oct. 06, 2022	Oct. 05, 2023
Attenuator	Pasternack	PE7005-10	10-1	Oct. 06, 2022	Oct. 05, 2023
Measurement Software	AUDIX	e3	6.120210g	NA	NA
Note: Calibration Interval of instruments listed above is one year.					

## 1.5 Test Standards

47 CFR FCC Part 15.247

ANSI C63.10-2013

## 1.6 Reference Guidance

FCC KDB 558074 D01 15.247 Meas Guidance v05r02

## 1.7 Deviation from Test Standard and Measurement Procedure

None

## 1.8 Measurement Uncertainty

The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor ( $k=2$ )).

Measurement Uncertainty	
Parameters	Uncertainty
Bandwidth	$\pm 34.130$ Hz
Conducted power	$\pm 0.808$ dB
Power density	$\pm 0.583$ dB
Conducted emission	$\pm 2.715$ dB
AC conducted emission	$\pm 2.92$ dB
Unwanted Emission $\leq 1$ GHz	$\pm 3.41$ dB
Unwanted Emission $> 1$ GHz	$\pm 4.59$ dB

## 2 Test Configuration

### 2.1 Testing Facility

<b>Test Laboratory</b>	International Certification Corporation
<b>Test Site</b>	CO01-WS, 03CH01-WS, TH01-WS
<b>Address of Test Site</b>	No.3-1, Lane 6, Wen San 3rd St., Kwei Shan Dist., Tao Yuan City 33381, Taiwan (R.O.C.)

- FCC Designation No.: TW2732
- FCC site registration No.: 181692
- ISED#: 10807A
- CAB identifier: TW2732

### 2.2 The Worst Test Modes and Channel Details

Test item	Modulation Mode	Test Frequency (MHz)	Data Rate	Test Configuration
AC Power Line Conducted Emission	11g	2437	6 Mbps	---
Unwanted Emissions ≤ 1GHz	11g	2437	6 Mbps	---
Unwanted Emissions >1GHz				
Conducted Output Power	11b	2412 / 2437 / 2462	1 Mbps	---
6dB bandwidth	11g	2412 / 2437 / 2462	6 Mbps	
Power spectral density	HT20	2412 / 2437 / 2462	MCS 0	

**NOTE:**

1. The EUT was pretested with 3 orientations placed on the table for the radiated emission measurement – X, Y, and Z-plane. The **X-plane** results were found as the worst case and were shown in this report.

### 3 Transmitter Test Results

#### 3.1 6dB and Occupied Bandwidth

##### 3.1.1 Limit of 6dB Bandwidth

The minimum 6dB bandwidth shall be at least 500 kHz.

##### 3.1.2 Test Procedures


###### 6dB Bandwidth

1. Set resolution bandwidth (RBW) = 100 kHz, Video bandwidth = 300 kHz.
2. Detector = Peak, Trace mode = max hold.
3. Sweep = auto couple, Allow the trace to stabilize.
4. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower) that are attenuated by 6dB relative to the maximum level measured in the fundamental emission.

###### Occupied Bandwidth

1. Set resolution bandwidth (RBW) = 1% ~ 5 % of OBW, Video bandwidth = 3 x RBW
2. Detector = Sample, Trace mode = max hold.
3. Sweep = auto couple, Allow the trace to stabilize.
4. Use the OBW measurement function of spectrum analyzer to measure the occupied bandwidth.

##### 3.1.3 Test Setup

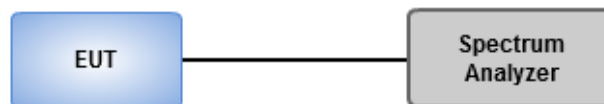

##### 3.1.4 Test Results

<b>Ambient Condition</b>	23°C / 66%	<b>Tested By</b>	Akun Chung
--------------------------	------------	------------------	------------

Refer to Appendix A.

## 3.2 Conducted Output Power

### 3.2.1 Limit of Conducted Output Power

Conducted power shall not exceed 1Watt.

Antenna gain  $\leq$  6dBi, no any corresponding reduction is in output power limit.

Antenna gain  $>$  6dBi

Non Fixed, point to point operations.

The conducted output power from the intentional radiator shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dB


Fixed, point to point operations

Systems operating in the 2400–2483.5 MHz band that are used exclusively for fixed, point-to-point Operations, maximum peak output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

### 3.2.2 Test Procedures

A broadband RF power meter is used for output power measurement. The video bandwidth of power meter is greater than DTS bandwidth of EUT. If duty cycle of test signal is not 100 %, trigger and gating function of power meter will be enabled to capture transmission burst for measuring output power.

### 3.2.3 Test Setup

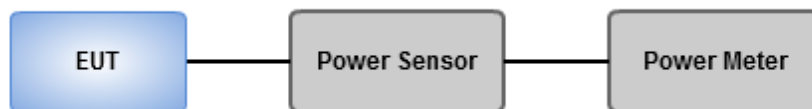

### 3.2.4 Test Results

<b>Ambient Condition</b>	23°C / 66%	<b>Tested By</b>	Akun Chung
--------------------------	------------	------------------	------------

Refer to Appendix B.

### 3.3 Power Spectral Density

#### 3.3.1 Limit of Power Spectral Density

Power spectral density shall not be greater than 8 dBm in any 3 kHz band.

#### 3.3.2 Test Procedures

##### Peak PSD

1. Set the RBW = 3 kHz, VBW = 10 kHz.
2. Detector = Peak, Sweep time = auto couple.
3. Trace mode = max hold, allow trace to fully stabilize.
4. Use the peak marker function to determine the maximum amplitude level.


##### Average PSD, duty cycle $\geq$ 98%

1. Set the RBW = 3 kHz, VBW = 10 kHz.
2. Detector = RMS, Sweep time = auto couple.
3. Sweep time = auto couple.
4. Employ trace averaging (RMS) mode over a minimum of 100 traces.
5. Use the peak marker function to determine the maximum amplitude level.

##### Average PSD, duty cycle < 98%

1. Set the RBW = 3 kHz, VBW = 10 kHz
2. Detector = RMS, Sweep time = auto couple.
3. Sweep time = auto couple.
4. Employ trace averaging (RMS) mode over a minimum of 100 traces.
5. Use the peak marker function to determine the maximum amplitude level.
6. Add  $10 \log (1/x)$ , where x is the duty cycle.

#### 3.3.3 Test Setup



#### 3.3.4 Test Results

<b>Ambient Condition</b>	23°C / 66%	<b>Tested By</b>	Akun Chung
--------------------------	------------	------------------	------------

Refer to Appendix C.

### 3.4 Unwanted Emissions into Restricted Frequency Bands

#### 3.4.1 Limit of Unwanted Emissions into Restricted Frequency Bands

Restricted Band Emissions Limit			
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300
0.490~1.705	24000/F(kHz)	33.8 - 23	30
1.705~30.0	30	29	30
30~88	100	40	3
88~216	150	43.5	3
216~960	200	46	3
Above 960	500	54	3

**Note 1:**  
Qusai-Peak value is measured for frequency below 1GHz except for 9–90 kHz, 110–490 kHz frequency band. Peak and average value are measured for frequency above 1GHz. The limit on average radio frequency emission is as above table. The limit on peak radio frequency emissions is 20 dB above the maximum permitted average emission limit

**Note 2:**  
Measurements may be performed at a distance other than what is specified provided. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor as below, Frequency at or above 30 MHz: 20 dB/decade Frequency below 30 MHz: 40 dB/decade.

#### 3.4.2 Test Procedures


1. Measurement is made at a semi-anechoic chamber that incorporates a turntable allowing a EUT rotation of 360°. A continuously-rotating, remotely-controlled turntable is installed at the test site to support the EUT and facilitate determination of the direction of maximum radiation for each EUT emission frequency. The EUT is placed at test table. For emissions testing at or below 1 GHz, the table height is 80 cm above the reference ground plane. For emission measurements above 1 GHz, the table height is 1.5 m
2. Measurement is made with the antenna positioned in both the horizontal and vertical planes of polarization. The measurement antenna is varied in height (1m ~ 4m) above the reference ground plane to obtain the maximum signal strength. Distance between EUT and antenna is 3 m.
3. This investigation is performed with the EUT rotated 360°, the antenna height scanned between 1 m and 4 m, and the antenna rotated to repeat the measurements for both the horizontal and vertical antenna polarizations.

Note:


1. 120kHz measurement bandwidth of test receiver and Quasi-peak detector is for radiated emission below 1GHz.
2. RBW=1MHz, VBW=3MHz and Peak detector is for peak measured value of radiated emission above 1GHz.
3. RBW=1MHz, VBW=1/T and Peak detector is for average measured value of radiated emission above 1GHz.

### 3.4.3 Test Setup

#### Radiated Emissions below 1 GHz

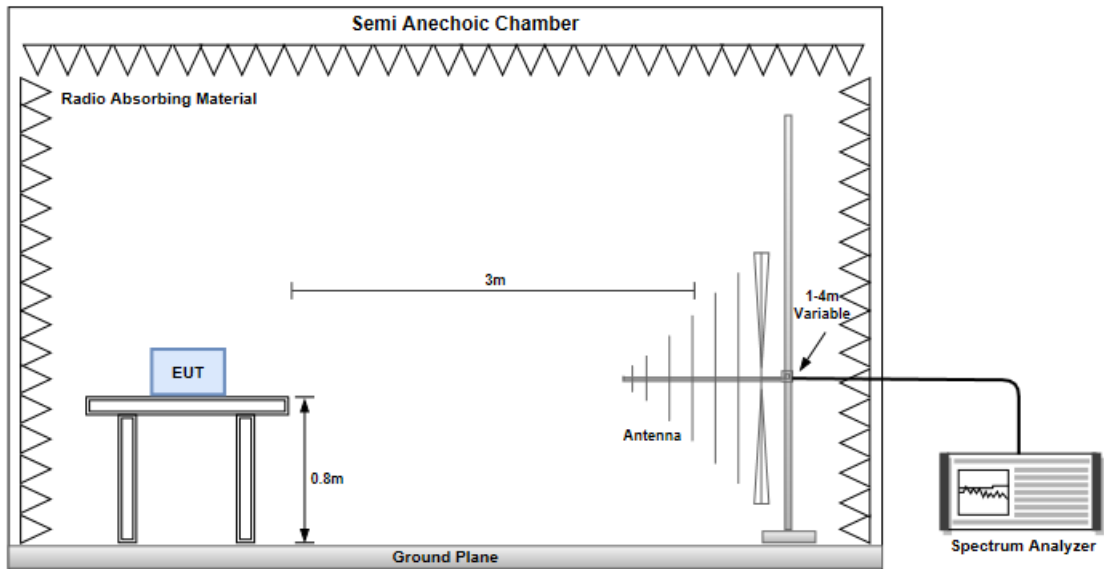

#### Radiated Emissions above 1 GHz

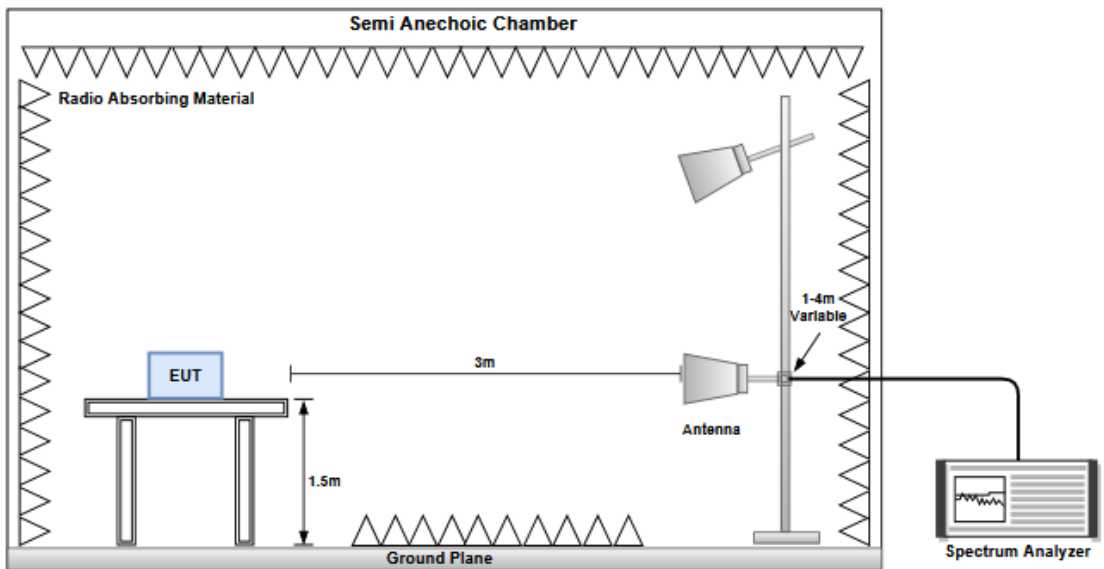

### 3.4.4 Test Results

Refer to Appendix D.



## 3.5 Emissions in Non-Restricted Frequency Bands

### 3.5.1 Emissions in Non-Restricted Frequency Bands Limit

Peak power in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz.

### 3.5.2 Test Procedures


#### Reference level measurement

1. Set RBW=100kHz, VBW = 300kHz , Detector = Peak, Sweep time = Auto
2. Trace = max hold , Allow Trace to fully stabilize
3. Use the peak marker function to determine the maximum PSD level

#### Emission level measurement

1. Set RBW=100kHz, VBW = 300kHz , Detector = Peak, Sweep time = Auto
2. Trace = max hold , Allow Trace to fully stabilize
3. Scan Frequency range is up to 25GHz
4. Use the peak marker function to determine the maximum amplitude level

### 3.5.3 Test Setup



### 3.5.4 Test Results

<b>Ambient Condition</b>	23°C / 66%	<b>Tested By</b>	Akun Chung
--------------------------	------------	------------------	------------

Refer to Appendix E.

## 3.6 AC Power Line Conducted Emissions

### 3.6.1 Limit of AC Power Line Conducted Emissions


Conducted Emissions Limit		
Frequency Emission (MHz)	Quasi-Peak	Average
0.15-0.5	66 - 56 *	56 - 46 *
0.5-5	56	46
5-30	60	50

Note 1: \* Decreases with the logarithm of the frequency.

### 3.6.2 Test Procedures

1. The device is placed on a test table, raised 80 cm above the reference ground plane. The vertical conducting plane is located 40 cm to the rear of the device.
2. The device is connected to line impedance stabilization network (LISN) and other accessories are connected to other LISN. Measured levels of AC power line conducted emission are across the 50  $\Omega$  LISN port.
3. AC conducted emission measurements is made over frequency range from 150 kHz to 30 MHz.
4. This measurement was performed with AC 120V / 60Hz.

### 3.6.3 Test Setup

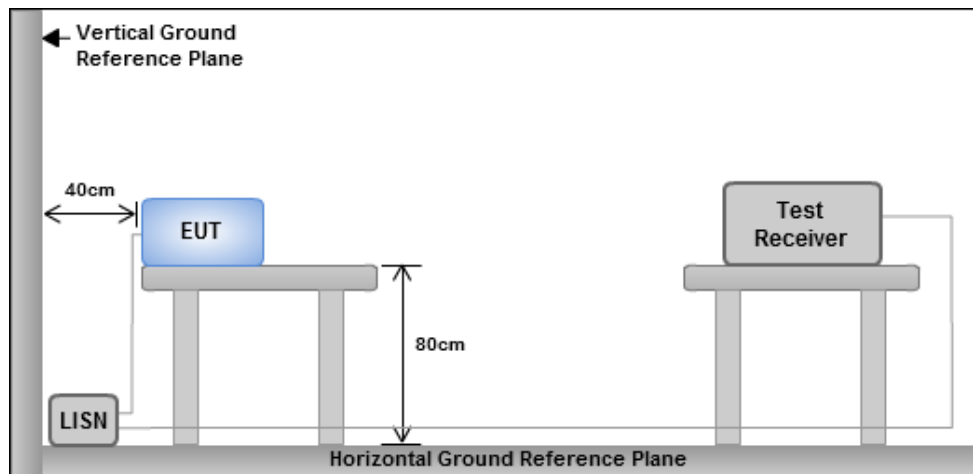

- Note: 1. Support units were connected to second LISN.  
 2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

### 3.6.4 Test Results

Refer to Appendix F.

## 4 Test laboratory information

Established in 2012, ICC provides foremost EMC & RF Testing and advisory consultation services by our skilled engineers and technicians. Our services employ a wide variety of advanced edge test equipment and one of the widest certification extents in the business.

International Certification Corporation (EMC and Wireless Communication Laboratory), it is our definitive objective is to institute long term, trust-based associations with our clients. The expectation we set up with our clients is based on outstanding service, practical expertise and devotion to a certified value structure. Our passion is to grant our clients with best EMC / RF services by oriented knowledgeable and accommodating staff.

Our Test sites are located at Linkou District and Kwei Shan District. Location map can be found on our website <http://www.icertifi.com.tw>.

### **Linkou**

Tel: 886-2-2601-1640

No.30-2, Ding Fwu Tsuen, Lin Kou  
District, New Taipei City, Taiwan  
(R.O.C.)

### **Kwei Shan**

Tel: 886-3-271-8666

No.3-1, Lane 6, Wen San 3rd  
St., Kwei Shan Dist., Tao Yuan  
City 33381, Taiwan (R.O.C.)  
No.2-1, Lane 6, Wen San 3rd  
St., Kwei Shan Dist., Tao Yuan  
City 33381, Taiwan (R.O.C.)

### **Kwei Shan Site II**

Tel: 886-3-271-8640

No.14-1, Lane 19, Wen San 3rd  
St., Kwei Shan Dist., Tao Yuan  
City 33381, Taiwan (R.O.C.)

If you have any suggestion, please feel free to contact us as below information.

Tel: 886-3-271-8666

Fax: 886-3-318-0345

Email: ICC\_Service@icertifi.com.tw

==END==

**Summary**

Mode	Max-N dB (Hz)	Max-OBW (Hz)	ITU-Code	Min-N dB (Hz)	Min-OBW (Hz)
2.4-2.4835GHz	-	-	-	-	-
802.11b_Nss1,(1Mbps)_1TX	9.55M	14.768M	14M8G1D	9.025M	14.048M
802.11g_Nss1,(6Mbps)_1TX	16.325M	18.801M	18M8D1D	16.275M	16.712M
802.11n HT20_Nss1,(MCS0)_1TX	17.55M	18.516M	18M5D1D	17.525M	17.841M

Max-N dB = Maximum 6dB down bandwidth; Max-OBW = Maximum 99% occupied bandwidth;  
Min-N dB = Minimum 6dB down bandwidth; Min-OBW = Minimum 99% occupied bandwidth

**Result**


Mode	Result	Limit (Hz)	Port 1-N dB (Hz)	Port 1-OBW (Hz)
802.11b_Nss1,(1Mbps)_1TX	-	-	-	-
2412MHz	Pass	500k	9.05M	14.078M
2437MHz	Pass	500k	9.55M	14.768M
2462MHz	Pass	500k	9.025M	14.048M
802.11g_Nss1,(6Mbps)_1TX	-	-	-	-
2412MHz	Pass	500k	16.325M	16.712M
2437MHz	Pass	500k	16.275M	18.801M
2462MHz	Pass	500k	16.3M	16.756M
802.11n HT20_Nss1,(MCS0)_1TX	-	-	-	-
2412MHz	Pass	500k	17.55M	17.941M
2437MHz	Pass	500k	17.525M	18.516M
2462MHz	Pass	500k	17.55M	17.841M

Port X-N dB = Port X 6dB down bandwidth;  
Port X-OBW = Port X 99% occupied bandwidth

2.4-2.4835GHz\_802.11b\_Nss1,(1Mbps)\_1TX

EBW


2412MHz

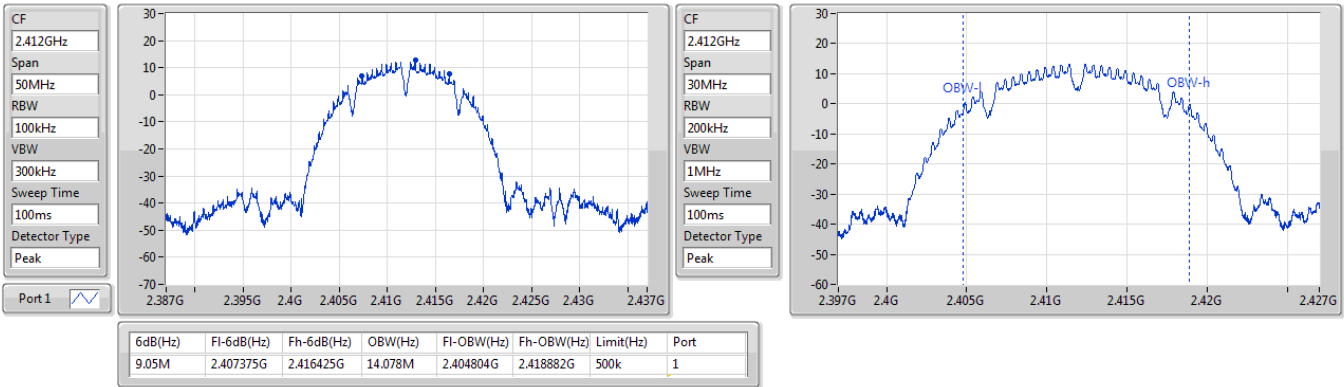

2.4-2.4835GHz\_802.11b\_Nss1,(1Mbps)\_1TX

EBW


2437MHz

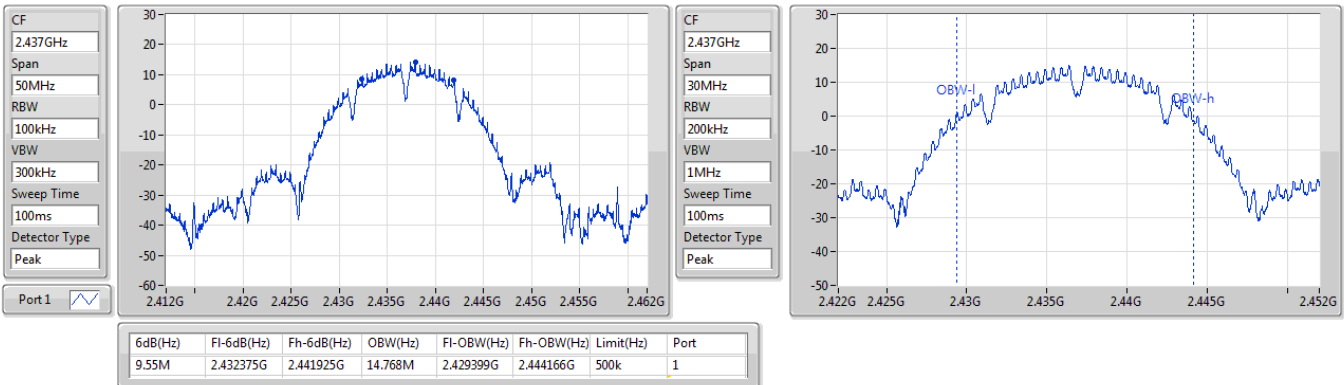

2.4-2.4835GHz\_802.11b\_Nss1,(1Mbps)\_1TX

EBW


2462MHz

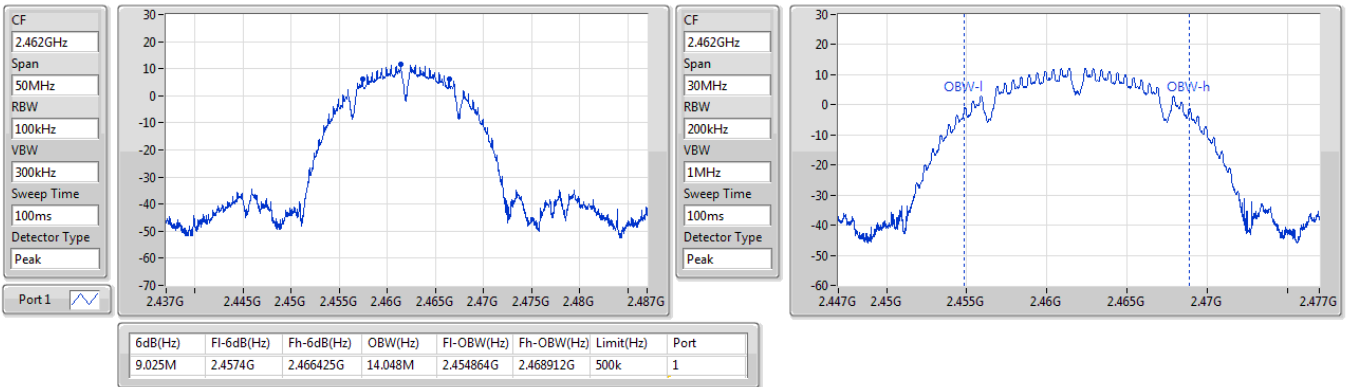

2.4-2.4835GHz\_802.11g\_Nss1,(6Mbps)\_1TX

EBW

2412MHz

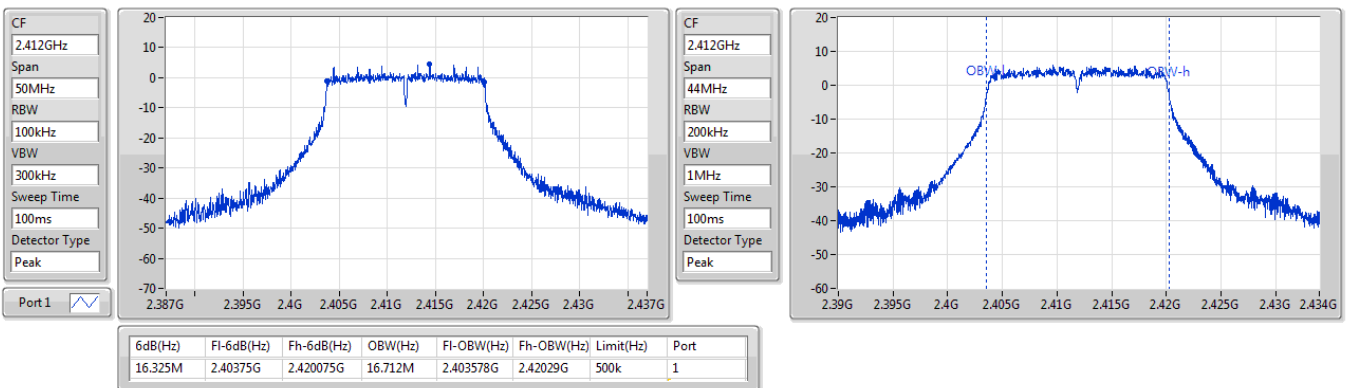




2.4-2.4835GHz\_802.11g\_Nss1,(6Mbps)\_1TX

EBW


2437MHz

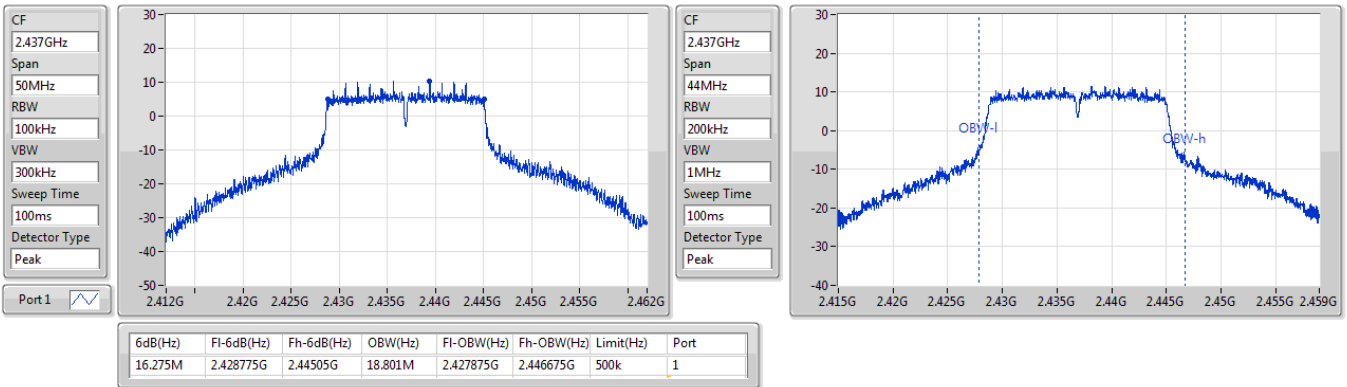

2.4-2.4835GHz\_802.11g\_Nss1,(6Mbps)\_1TX

EBW


2462MHz

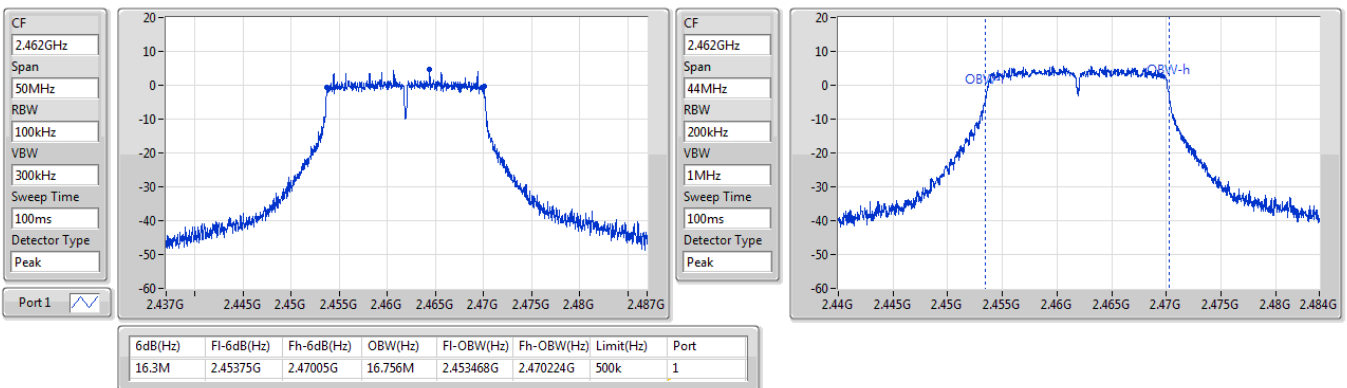

2.4-2.4835GHz\_802.11n HT20\_Nss1,(MCS0)\_1TX

EBW


2412MHz

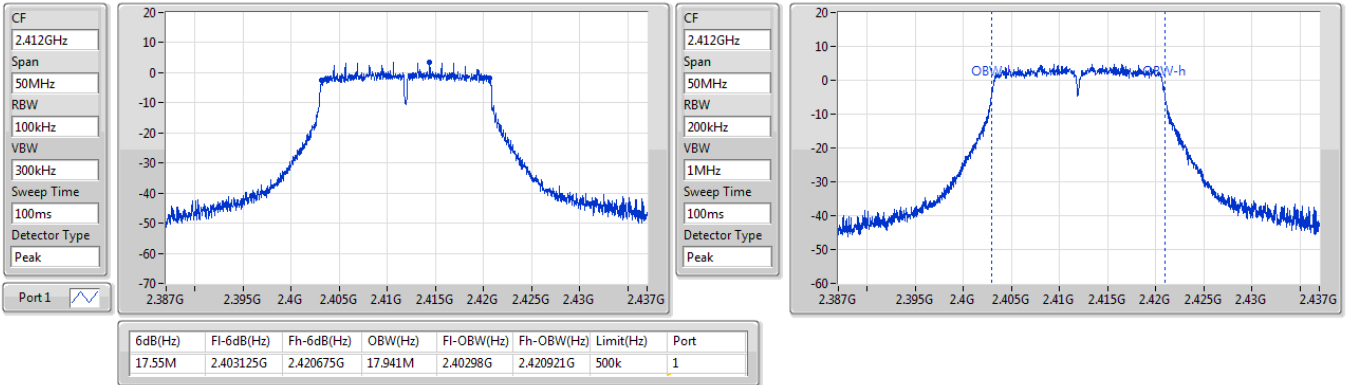

2.4-2.4835GHz\_802.11n HT20\_Nss1,(MCS0)\_1TX

EBW

2437MHz

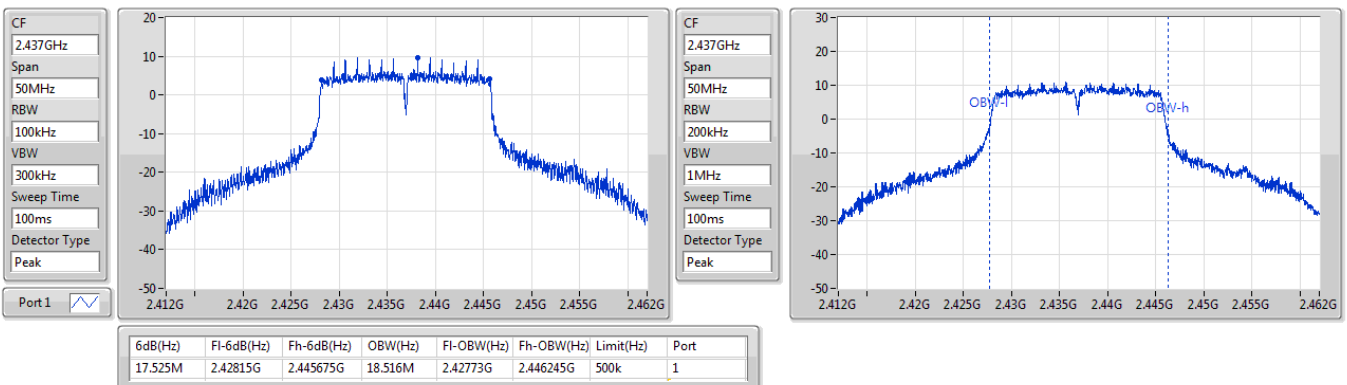






2.4-2.4835GHz\_802.11n\_HT20\_Nss1,(MCS0)\_1TX

EBW

2462MHz

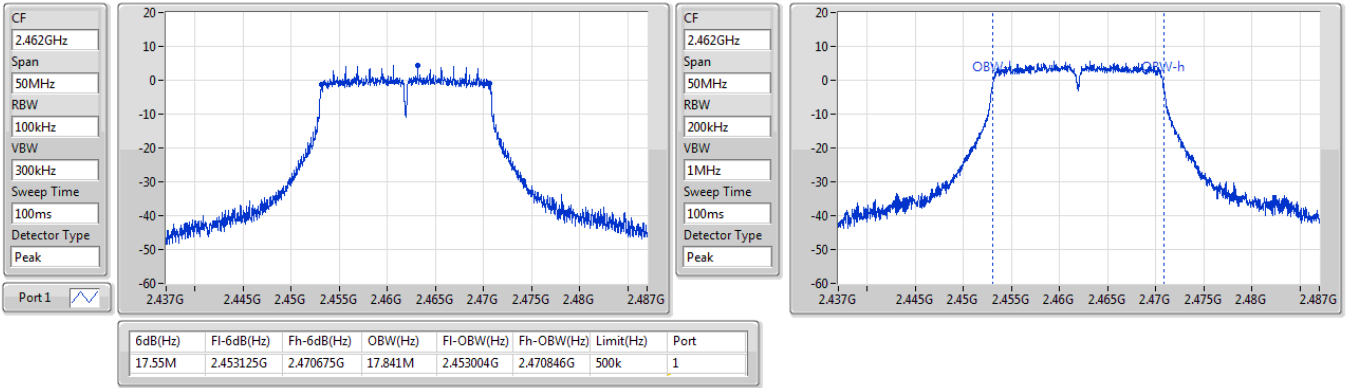



Summary

Mode	Total Power (dBm)	Total Power (W)
2.4-2.4835GHz	-	-
802.11b_Nss1,(1Mbps)_1TX	24.92	0.31046
802.11g_Nss1,(6Mbps)_1TX	25.87	0.38637
802.11n HT20_Nss1,(MCS0)_1TX	25.84	0.38371

Result

Mode	Result	DG (dBi)	Port 1 (dBm)	Total Power (dBm)	Power Limit (dBm)	EIRP (dBm)	EIRP Limit (dBm)
802.11b_Nss1,(1Mbps)_1TX	-	-	-	-	-	-	-
2412MHz	Pass	1.37	23.17	23.17	30.00	24.54	36.00
2437MHz	Pass	1.37	24.92	24.92	30.00	26.29	36.00
2462MHz	Pass	1.37	22.87	22.87	30.00	24.24	36.00
802.11g_Nss1,(6Mbps)_1TX	-	-	-	-	-	-	-
2412MHz	Pass	1.37	24.21	24.21	30.00	25.58	36.00
2437MHz	Pass	1.37	25.87	25.87	30.00	27.24	36.00
2462MHz	Pass	1.37	24.16	24.16	30.00	25.53	36.00
802.11n HT20_Nss1,(MCS0)_1TX	-	-	-	-	-	-	-
2412MHz	Pass	1.37	24.16	24.16	30.00	25.53	36.00
2437MHz	Pass	1.37	25.84	25.84	30.00	27.21	36.00
2462MHz	Pass	1.37	24.71	24.71	30.00	26.08	36.00

DG = Directional Gain; Port X = Port X output power



## Conducted Output Power(Average)

## Appendix B

### Summary

Mode	Total Power (dBm)	Total Power (W)
2.4-2.4835GHz	-	-
802.11b_Nss1,(1Mbps)_1TX	22.86	0.19320
802.11g_Nss1,(6Mbps)_1TX	20.85	0.12162
802.11n HT20_Nss1,(MCS0)_1TX	20.08	0.10186

### Result

Mode	Result	DG (dBi)	Port 1 (dBm)	Total Power (dBm)	Power Limit (dBm)	EIRP (dBm)	EIRP Limit (dBm)
802.11b_Nss1,(1Mbps)_1TX	-	-	-	-	-	-	-
2412MHz	Pass	1.37	20.65	20.65	-	22.02	-
2437MHz	Pass	1.37	22.86	22.86	-	24.23	-
2462MHz	Pass	1.37	20.29	20.29	-	21.66	-
802.11g_Nss1,(6Mbps)_1TX	-	-	-	-	-	-	-
2412MHz	Pass	1.37	16.08	16.08	-	17.45	-
2437MHz	Pass	1.37	20.85	20.85	-	22.22	-
2462MHz	Pass	1.37	15.52	15.52	-	16.89	-
802.11n HT20_Nss1,(MCS0)_1TX	-	-	-	-	-	-	-
2412MHz	Pass	1.37	15.01	15.01	-	16.38	-
2437MHz	Pass	1.37	20.08	20.08	-	21.45	-
2462MHz	Pass	1.37	15.39	15.39	-	16.76	-

DG = Directional Gain; Port X = Port X output power

Note : Conducted average output power is for reference



Summary

Mode	PD (dBm/RBW)
2.4-2.4835GHz	-
802.11b_Nss1,(1Mbps)_1TX	-0.03
802.11g_Nss1,(6Mbps)_1TX	-3.29
802.11n HT20_Nss1,(MCS0)_1TX	-3.40


RBW = 3kHz;


Result


Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	PD (dBm/RBW)	PD Limit (dBm/RBW)
802.11b_Nss1,(1Mbps)_1TX	-	-	-	-	-
2412MHz	Pass	1.37	-1.21	-1.21	8.00
2437MHz	Pass	1.37	-0.03	-0.03	8.00
2462MHz	Pass	1.37	-1.31	-1.31	8.00
802.11g_Nss1,(6Mbps)_1TX	-	-	-	-	-
2412MHz	Pass	1.37	-9.29	-9.29	8.00
2437MHz	Pass	1.37	-3.29	-3.29	8.00
2462MHz	Pass	1.37	-9.93	-9.93	8.00
802.11n HT20_Nss1,(MCS0)_1TX	-	-	-	-	-
2412MHz	Pass	1.37	-9.76	-9.76	8.00
2437MHz	Pass	1.37	-3.40	-3.40	8.00
2462MHz	Pass	1.37	-9.90	-9.90	8.00


DG = Directional Gain; RBW = 3kHz;

PD =Maximum power density; Port X = Port X Power Density;

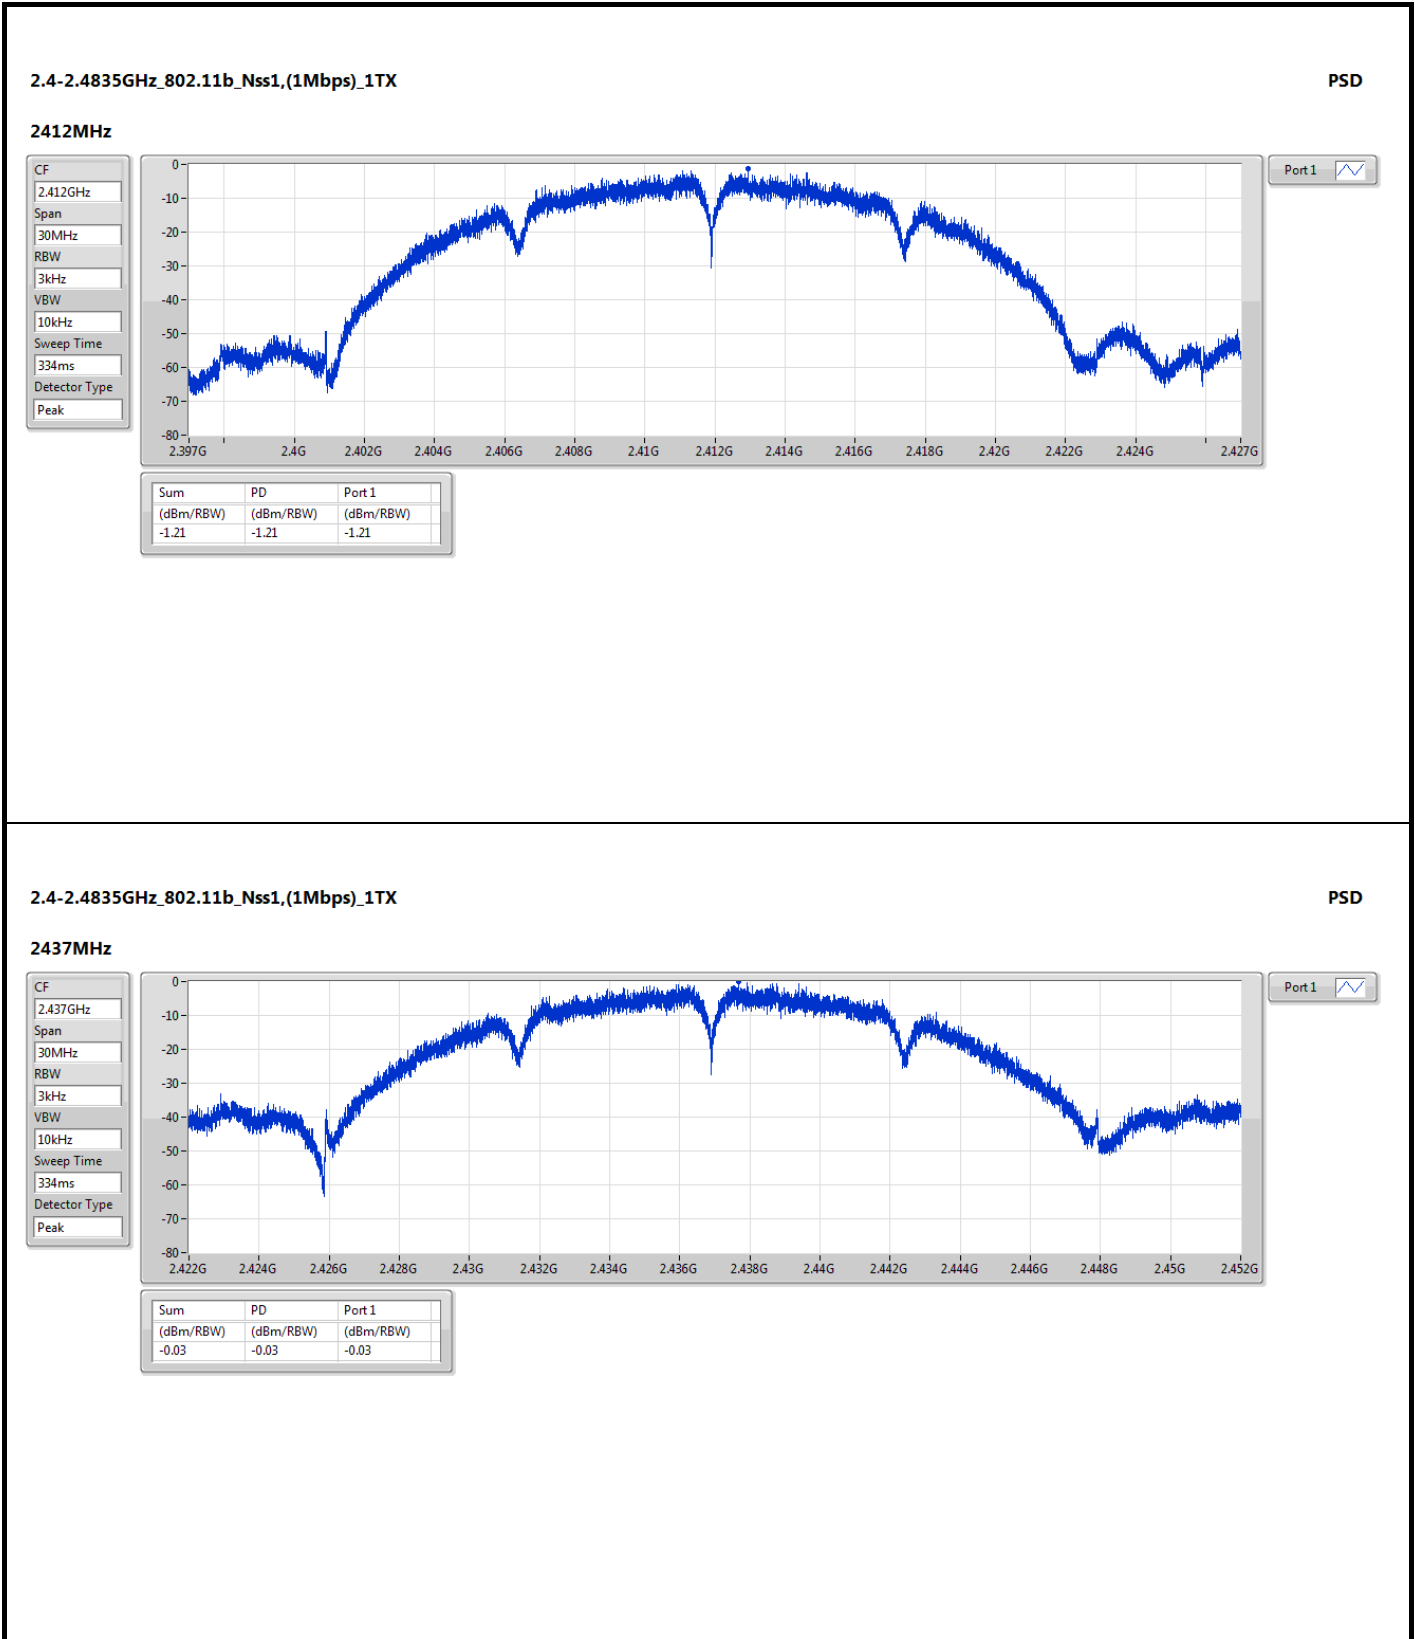


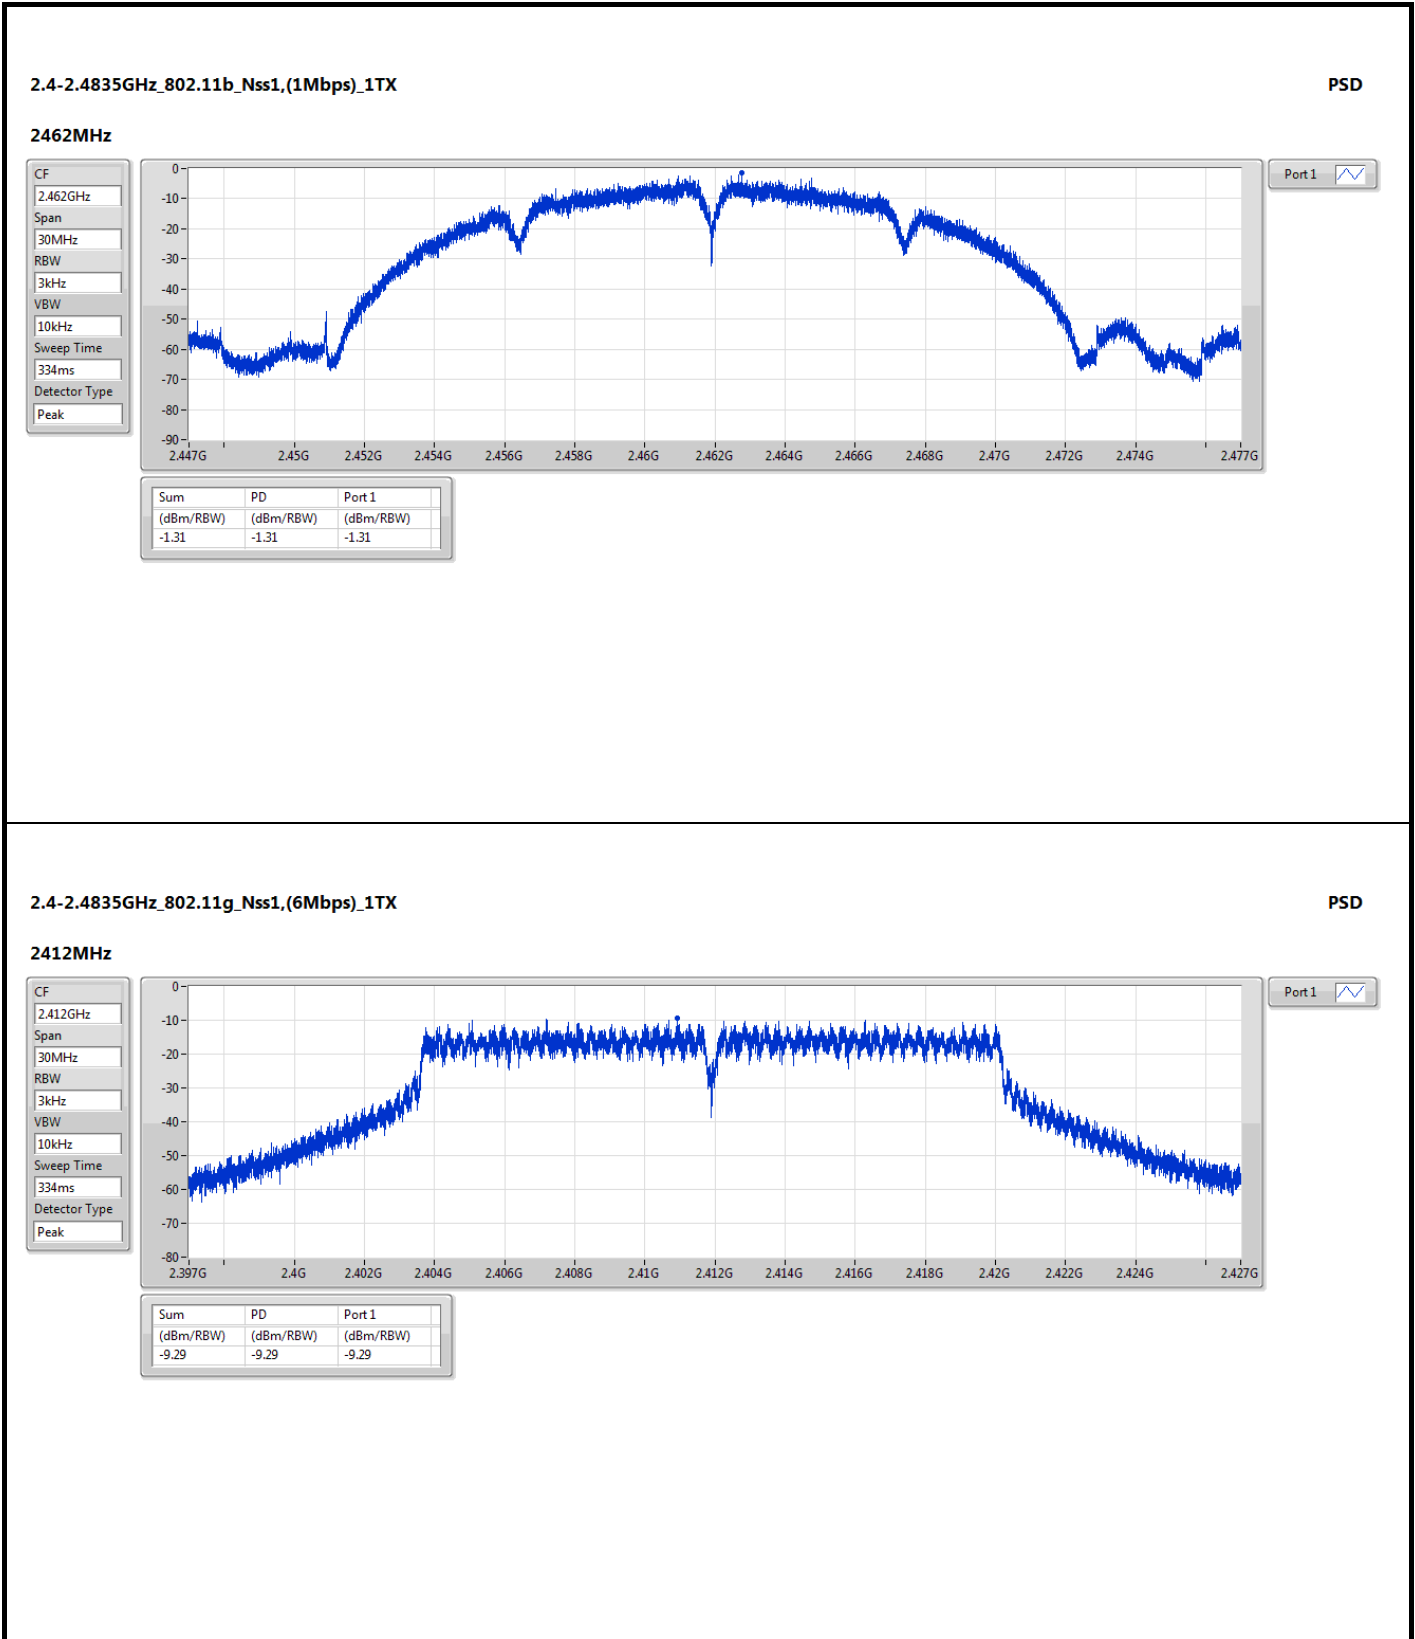

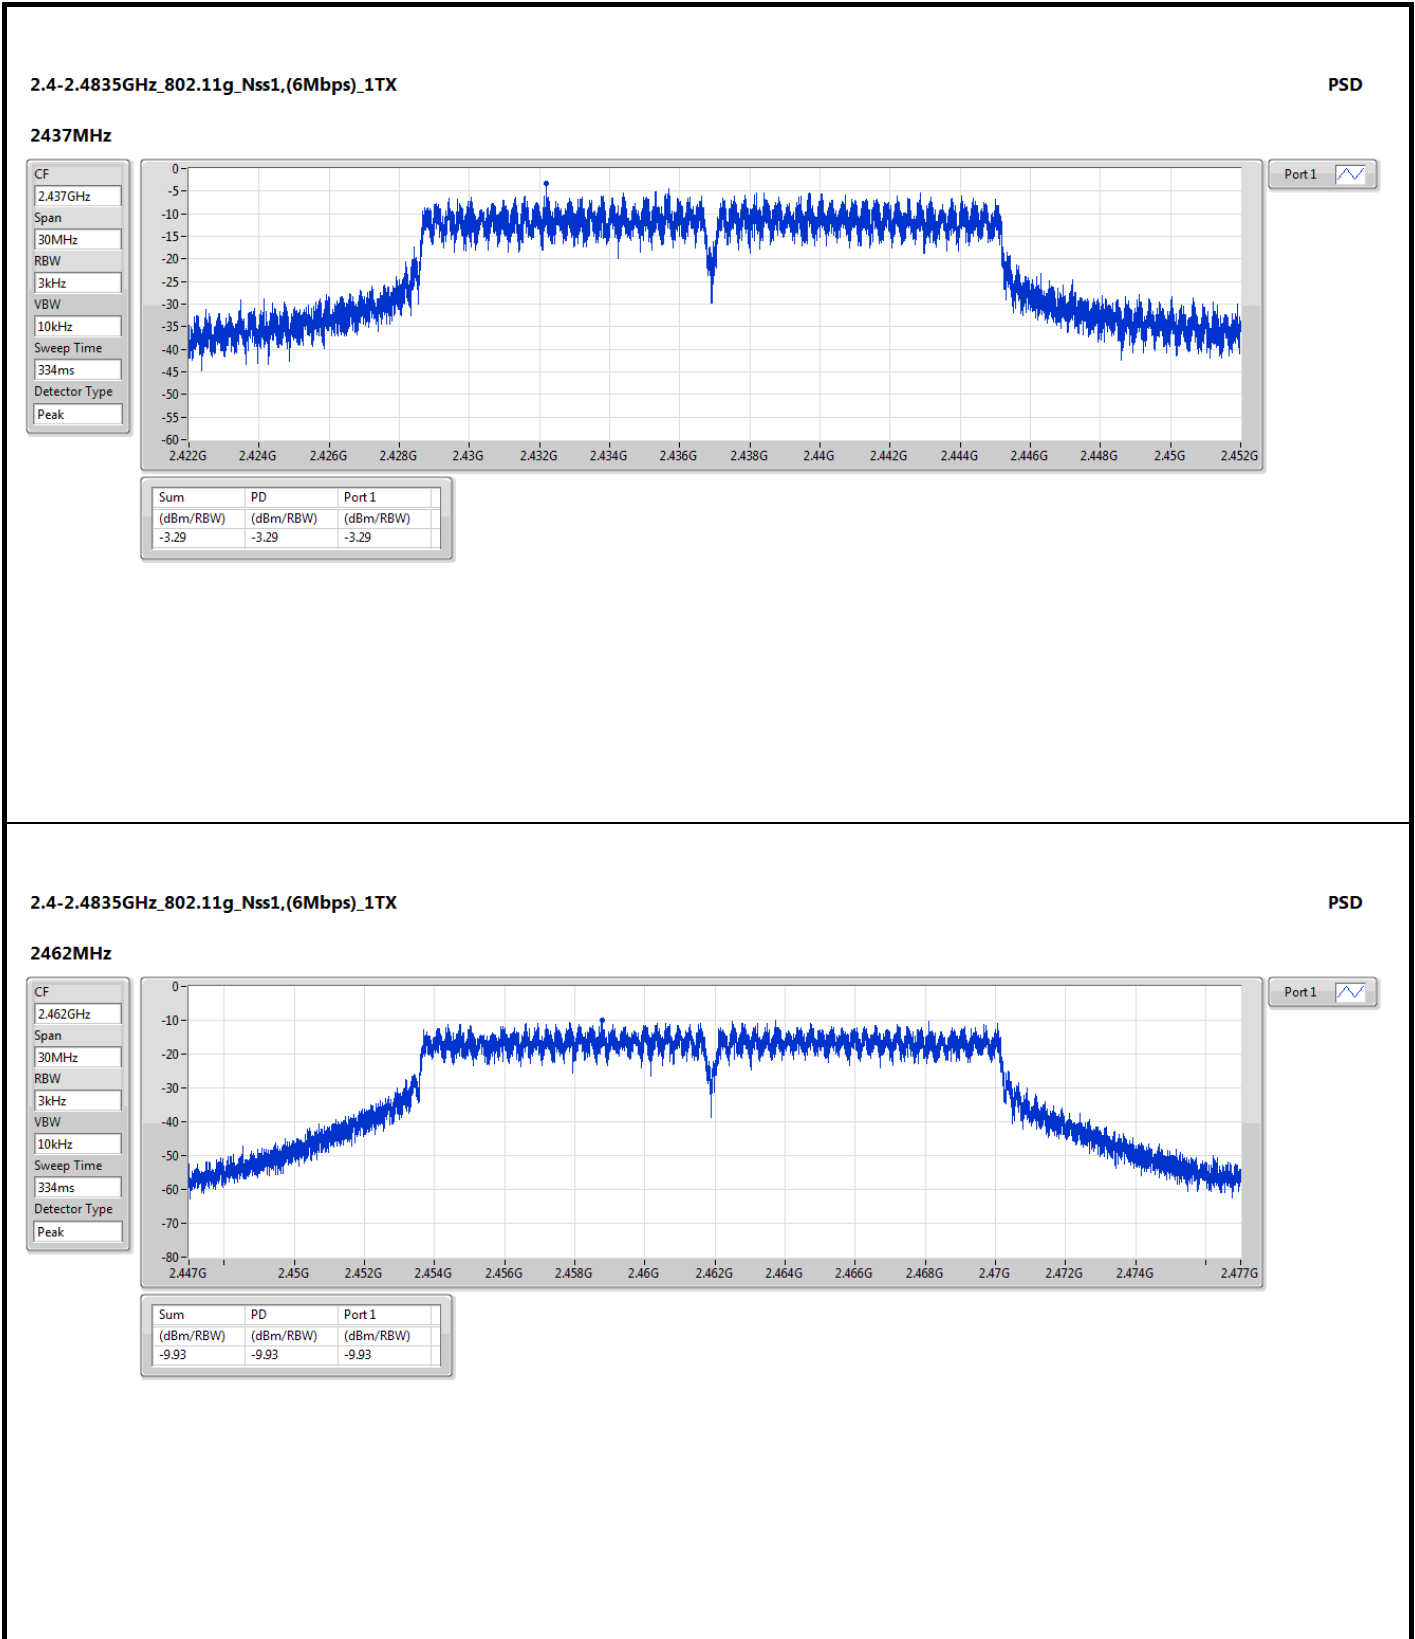

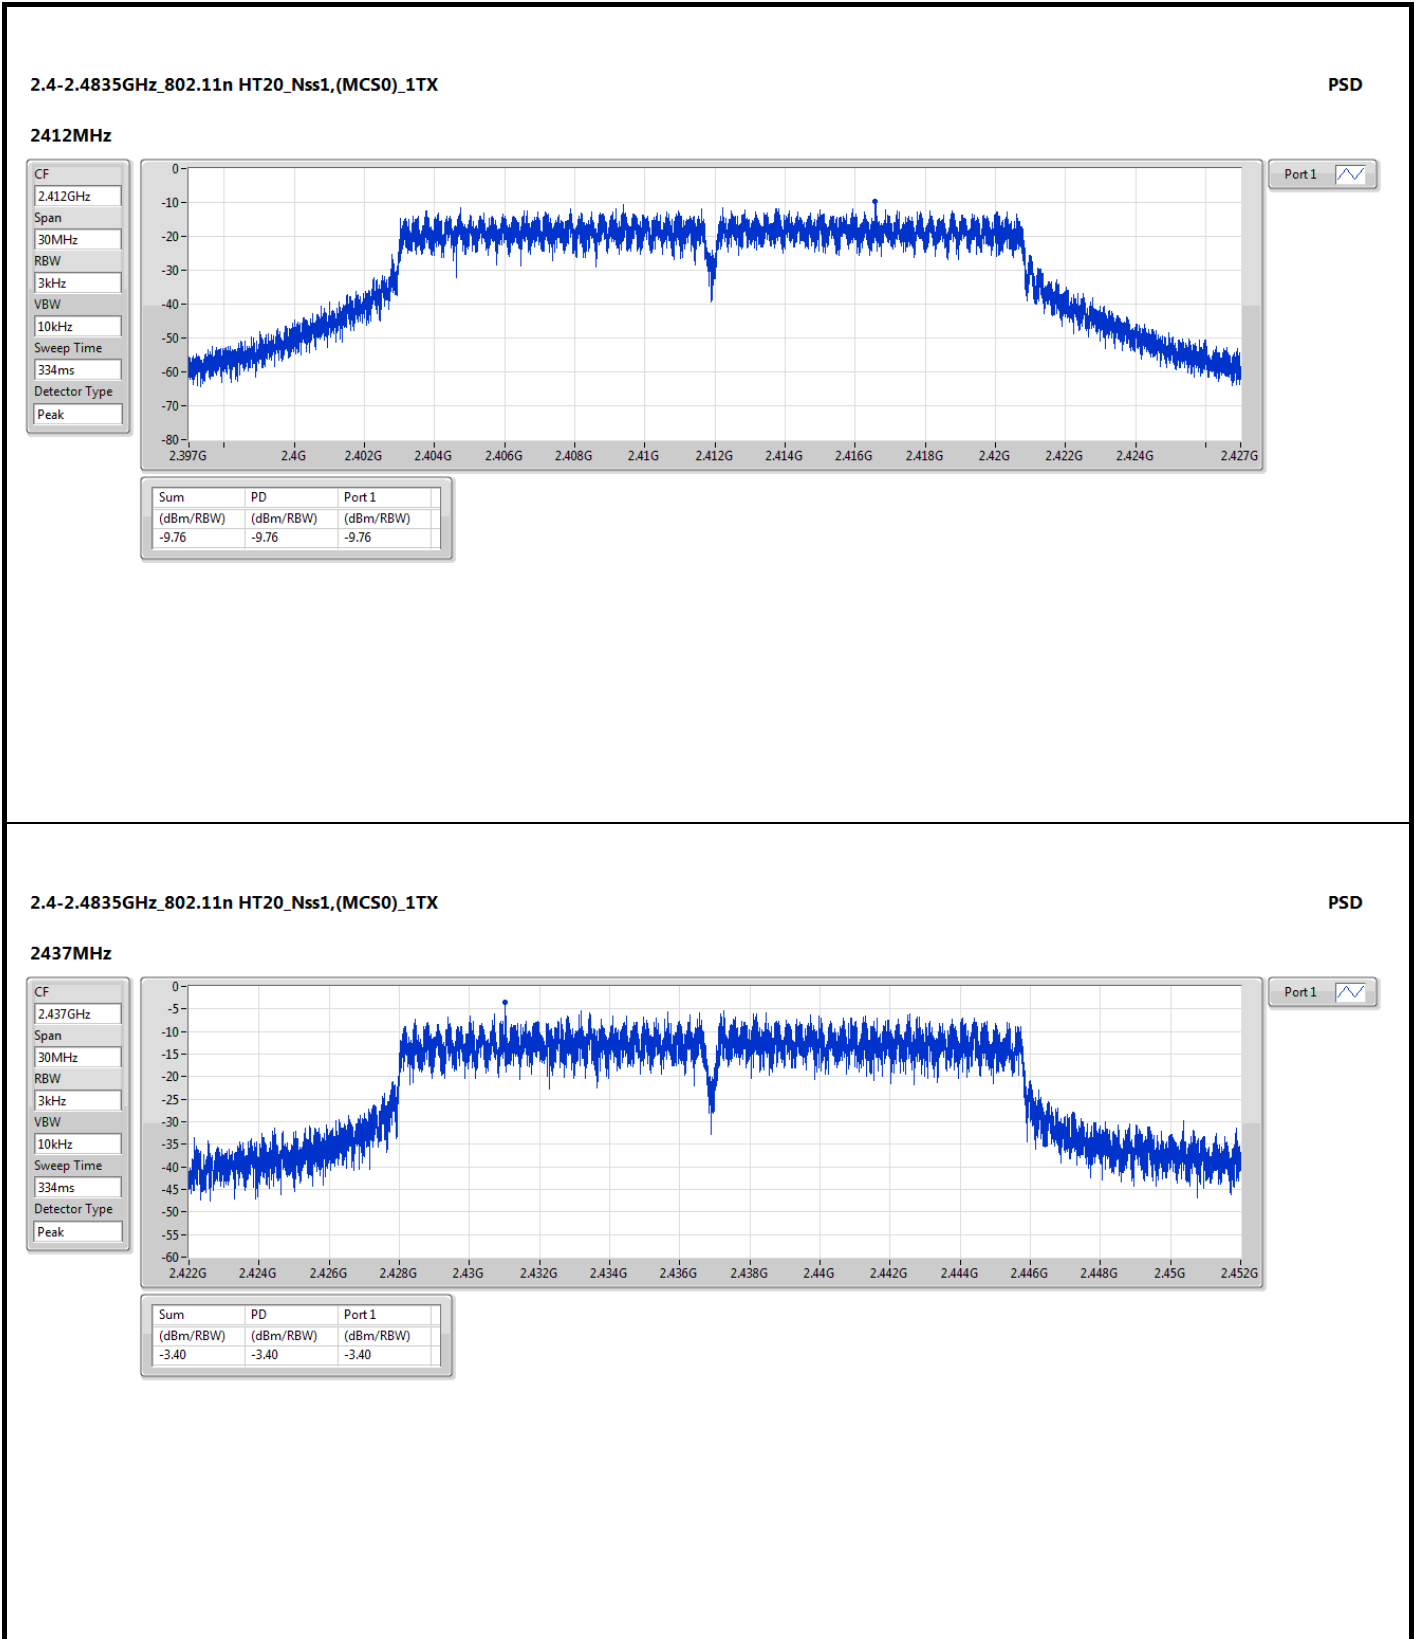



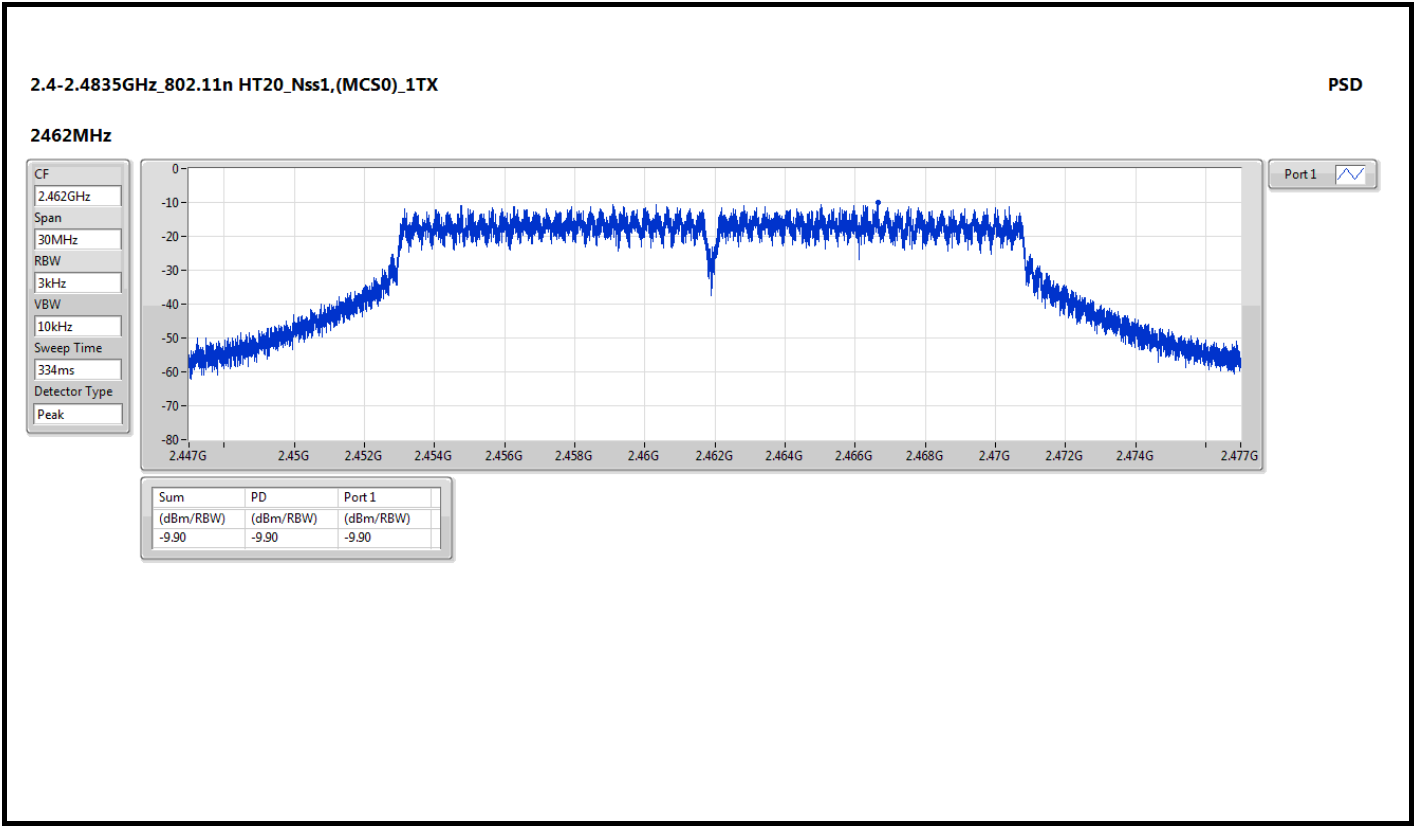




Unwanted Emissions (Below 1GHz)

Modulation	11g	Test Freq. (MHz)	2437
Polarization	Horizontal		

Test By :Paul Lin      Temperature(°C):23      Humidity(%):62

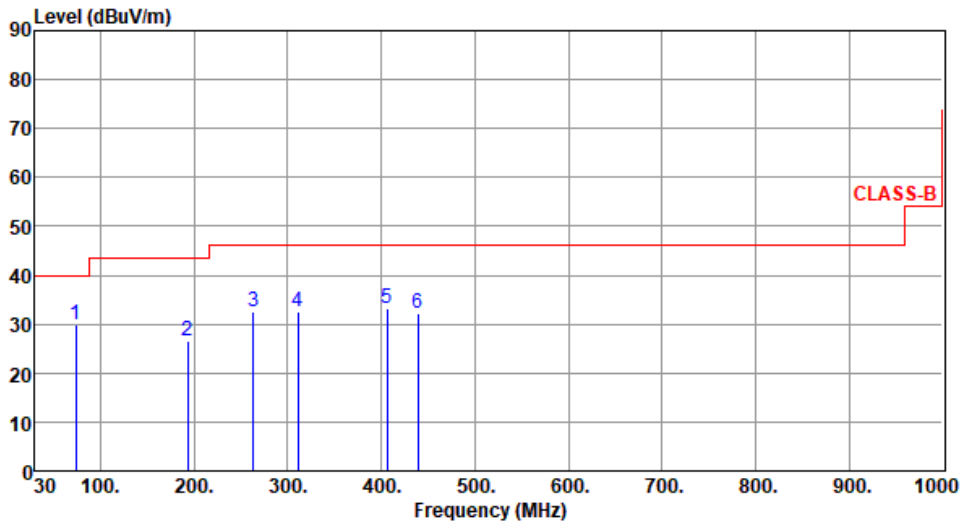


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	73.65	29.83	40.00	-10.17	41.92	-12.09	Peak	---	---
2	192.96	26.61	43.50	-16.89	38.16	-11.55	Peak	---	---
3	263.77	32.52	46.00	-13.48	41.68	-9.16	Peak	---	---
4	311.30	32.49	46.00	-13.51	40.24	-7.75	Peak	---	---
5	406.36	33.13	46.00	-12.87	38.58	-5.45	Peak	---	---
6	439.34	32.17	46.00	-13.83	36.60	-4.43	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor\* (dB/m)  
 \*Factor includes antenna factor , cable loss and amplifier gain  
 Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).  
 Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.



Modulation	11g	Test Freq. (MHz)	2437
Polarization	Vertical		

Test By : Paul Lin      Temperature(°C): 23      Humidity(%): 62

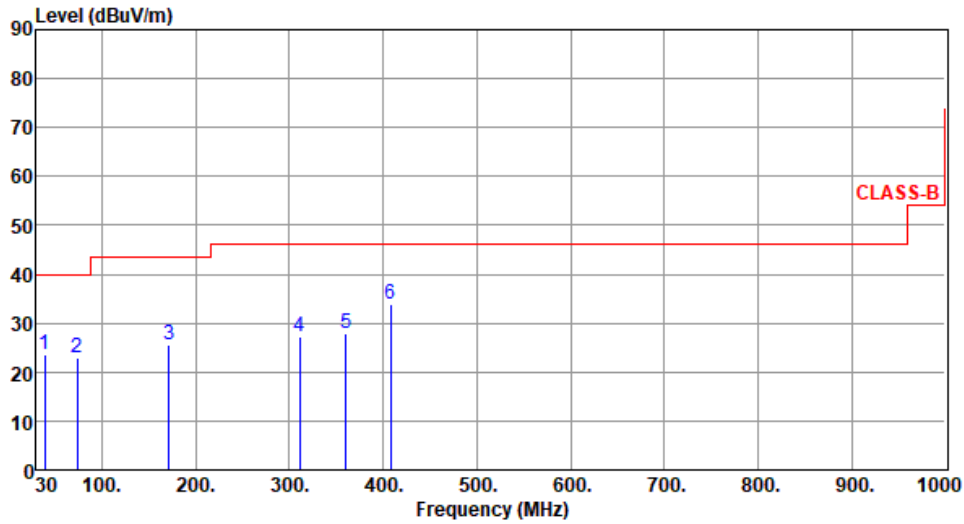

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	38.73	23.54	40.00	-16.46	32.35	-8.81	Peak	---	---
2	73.65	23.00	40.00	-17.00	35.09	-12.09	Peak	---	---
3	171.62	25.53	43.50	-17.97	34.94	-9.41	Peak	---	---
4	311.30	27.19	46.00	-18.81	34.94	-7.75	Peak	---	---
5	360.77	27.83	46.00	-18.17	34.66	-6.83	Peak	---	---
6	408.30	34.03	46.00	-11.97	39.40	-5.37	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor\* (dB/m)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.



Unwanted Emission (Above 1GHz) for 11b


Modulation	11b	Test Freq. (MHz)	2412						
Polarization	Horizontal								
Test By :Paul Lin      Temperature(°C):25      Humidity(%):64									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	2390.00	50.03	54.00	-3.97	54.68	-4.65	Average	100	122
2	2390.00	59.72	74.00	-14.28	64.37	-4.65	Peak	100	122
3	4824.00	50.88	54.00	-3.12	51.41	-0.53	Average	114	220
4	4824.00	53.99	74.00	-20.01	54.52	-0.53	Peak	114	220
5	12060.00	42.59	54.00	-11.41	36.22	6.37	Average	100	182
6	12060.00	55.91	74.00	-18.09	49.54	6.37	Peak	100	182

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor\* (dB/m)  
 \*Factor includes antenna factor , cable loss and amplifier gain  
 Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	11b	Test Freq. (MHz)	2412
Polarization	Vertical		

Test By : Paul Lin      Temperature(°C): 25      Humidity(%): 64

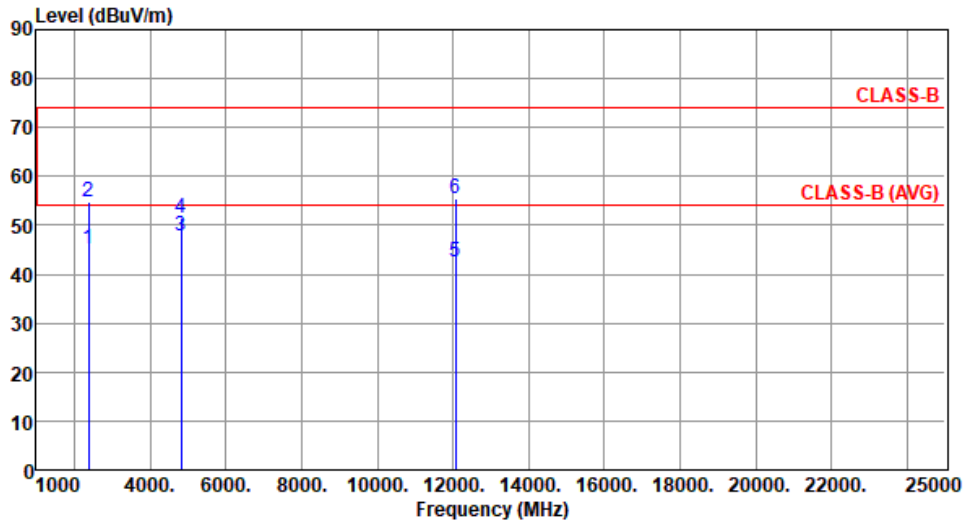

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	2390.00	45.15	54.00	-8.85	49.80	-4.65	Average	312	109
2	2390.00	54.73	74.00	-19.27	59.38	-4.65	Peak	312	109
3	4824.00	47.95	54.00	-6.05	48.48	-0.53	Average	145	92
4	4824.00	51.64	74.00	-22.36	52.17	-0.53	Peak	145	92
5	12060.00	42.52	54.00	-11.48	36.15	6.37	Average	100	124
6	12060.00	55.62	74.00	-18.38	49.25	6.37	Peak	100	124

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor\* (dB/m)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



<b>Modulation</b>	11b	<b>Test Freq. (MHz)</b>	2437																																																																																																																																																																
<b>Polarization</b>	Horizontal																																																																																																																																																																		
Test By : Paul Lin      Temperature(°C):25      Humidity(%):64																																																																																																																																																																			
	<table border="1"> <thead> <tr> <th>1</th> <th>2</th> <th>3</th> <th>4</th> <th>5</th> <th>6</th> <th>7</th> <th>8</th> </tr> </thead> <tbody> <tr> <td>2390.00</td> <td>2390.00</td> <td>2483.50</td> <td>2483.50</td> <td>4874.00</td> <td>4874.00</td> <td>7311.00</td> <td>7311.00</td> </tr> <tr> <td>52.03</td> <td>58.67</td> <td>48.90</td> <td>56.93</td> <td>52.52</td> <td>55.33</td> <td>48.04</td> <td>56.04</td> </tr> <tr> <td>54.00</td> <td>74.00</td> <td>54.00</td> <td>74.00</td> <td>54.00</td> <td>74.00</td> <td>54.00</td> <td>74.00</td> </tr> <tr> <td>-1.97</td> <td>-15.33</td> <td>-5.10</td> <td>-17.07</td> <td>-1.48</td> <td>-18.67</td> <td>-5.96</td> <td>-17.96</td> </tr> <tr> <td>56.68</td> <td>63.32</td> <td>53.79</td> <td>61.82</td> <td>53.06</td> <td>55.87</td> <td>42.82</td> <td>50.82</td> </tr> <tr> <td>-4.65</td> <td>-4.65</td> <td>-4.89</td> <td>-4.89</td> <td>-0.54</td> <td>-0.54</td> <td>5.22</td> <td>5.22</td> </tr> <tr> <td>Average</td> <td>Peak</td> <td>Average</td> <td>Peak</td> <td>Average</td> <td>Peak</td> <td>Average</td> <td>Peak</td> </tr> <tr> <td>182</td> <td>182</td> <td>182</td> <td>182</td> <td>109</td> <td>109</td> <td>337</td> <td>337</td> </tr> <tr> <td>123</td> <td>123</td> <td>123</td> <td>123</td> <td>222</td> <td>222</td> <td>256</td> <td>256</td> </tr> </tbody> </table>	1	2	3	4	5	6	7	8	2390.00	2390.00	2483.50	2483.50	4874.00	4874.00	7311.00	7311.00	52.03	58.67	48.90	56.93	52.52	55.33	48.04	56.04	54.00	74.00	54.00	74.00	54.00	74.00	54.00	74.00	-1.97	-15.33	-5.10	-17.07	-1.48	-18.67	-5.96	-17.96	56.68	63.32	53.79	61.82	53.06	55.87	42.82	50.82	-4.65	-4.65	-4.89	-4.89	-0.54	-0.54	5.22	5.22	Average	Peak	Average	Peak	Average	Peak	Average	Peak	182	182	182	182	109	109	337	337	123	123	123	123	222	222	256	256	<table border="1"> <thead> <tr> <th>Freq. MHz</th> <th>Emission level dBuV/m</th> <th>Limit dBuV/m</th> <th>Margin dB</th> <th>SA reading dBuV</th> <th>Factor dB/m</th> <th>Remark</th> <th>ANT High cm</th> <th>Turn Table deg</th> </tr> </thead> <tbody> <tr> <td>2390.00</td> <td>52.03</td> <td>54.00</td> <td>-1.97</td> <td>56.68</td> <td>-4.65</td> <td>Average</td> <td>182</td> <td>123</td> </tr> <tr> <td>2390.00</td> <td>58.67</td> <td>74.00</td> <td>-15.33</td> <td>63.32</td> <td>-4.65</td> <td>Peak</td> <td>182</td> <td>123</td> </tr> <tr> <td>2483.50</td> <td>48.90</td> <td>54.00</td> <td>-5.10</td> <td>53.79</td> <td>-4.89</td> <td>Average</td> <td>182</td> <td>123</td> </tr> <tr> <td>2483.50</td> <td>56.93</td> <td>74.00</td> <td>-17.07</td> <td>61.82</td> <td>-4.89</td> <td>Peak</td> <td>182</td> <td>123</td> </tr> <tr> <td>4874.00</td> <td>52.52</td> <td>54.00</td> <td>-1.48</td> <td>53.06</td> <td>-0.54</td> <td>Average</td> <td>109</td> <td>222</td> </tr> <tr> <td>4874.00</td> <td>55.33</td> <td>74.00</td> <td>-18.67</td> <td>55.87</td> <td>-0.54</td> <td>Peak</td> <td>109</td> <td>222</td> </tr> <tr> <td>7311.00</td> <td>48.04</td> <td>54.00</td> <td>-5.96</td> <td>42.82</td> <td>5.22</td> <td>Average</td> <td>337</td> <td>256</td> </tr> <tr> <td>7311.00</td> <td>56.04</td> <td>74.00</td> <td>-17.96</td> <td>50.82</td> <td>5.22</td> <td>Peak</td> <td>337</td> <td>256</td> </tr> </tbody> </table>	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	2390.00	52.03	54.00	-1.97	56.68	-4.65	Average	182	123	2390.00	58.67	74.00	-15.33	63.32	-4.65	Peak	182	123	2483.50	48.90	54.00	-5.10	53.79	-4.89	Average	182	123	2483.50	56.93	74.00	-17.07	61.82	-4.89	Peak	182	123	4874.00	52.52	54.00	-1.48	53.06	-0.54	Average	109	222	4874.00	55.33	74.00	-18.67	55.87	-0.54	Peak	109	222	7311.00	48.04	54.00	-5.96	42.82	5.22	Average	337	256	7311.00	56.04	74.00	-17.96	50.82	5.22	Peak	337	256
1	2	3	4	5	6	7	8																																																																																																																																																												
2390.00	2390.00	2483.50	2483.50	4874.00	4874.00	7311.00	7311.00																																																																																																																																																												
52.03	58.67	48.90	56.93	52.52	55.33	48.04	56.04																																																																																																																																																												
54.00	74.00	54.00	74.00	54.00	74.00	54.00	74.00																																																																																																																																																												
-1.97	-15.33	-5.10	-17.07	-1.48	-18.67	-5.96	-17.96																																																																																																																																																												
56.68	63.32	53.79	61.82	53.06	55.87	42.82	50.82																																																																																																																																																												
-4.65	-4.65	-4.89	-4.89	-0.54	-0.54	5.22	5.22																																																																																																																																																												
Average	Peak	Average	Peak	Average	Peak	Average	Peak																																																																																																																																																												
182	182	182	182	109	109	337	337																																																																																																																																																												
123	123	123	123	222	222	256	256																																																																																																																																																												
Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																																																																																											
2390.00	52.03	54.00	-1.97	56.68	-4.65	Average	182	123																																																																																																																																																											
2390.00	58.67	74.00	-15.33	63.32	-4.65	Peak	182	123																																																																																																																																																											
2483.50	48.90	54.00	-5.10	53.79	-4.89	Average	182	123																																																																																																																																																											
2483.50	56.93	74.00	-17.07	61.82	-4.89	Peak	182	123																																																																																																																																																											
4874.00	52.52	54.00	-1.48	53.06	-0.54	Average	109	222																																																																																																																																																											
4874.00	55.33	74.00	-18.67	55.87	-0.54	Peak	109	222																																																																																																																																																											
7311.00	48.04	54.00	-5.96	42.82	5.22	Average	337	256																																																																																																																																																											
7311.00	56.04	74.00	-17.96	50.82	5.22	Peak	337	256																																																																																																																																																											
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																																																																																																																			




<b>Modulation</b>	11b	<b>Test Freq. (MHz)</b>	2437																																																																																																																																																																
<b>Polarization</b>	Vertical																																																																																																																																																																		
Test By : Paul Lin      Temperature(°C):25      Humidity(%):64																																																																																																																																																																			
	<table border="1"> <thead> <tr> <th>1</th> <th>2</th> <th>3</th> <th>4</th> <th>5</th> <th>6</th> <th>7</th> <th>8</th> </tr> </thead> <tbody> <tr> <td>2390.00</td> <td>2390.00</td> <td>2483.50</td> <td>2483.50</td> <td>4874.00</td> <td>4874.00</td> <td>7311.00</td> <td>7311.00</td> </tr> <tr> <td>37.63</td> <td>52.11</td> <td>43.45</td> <td>53.44</td> <td>47.84</td> <td>51.37</td> <td>42.97</td> <td>52.80</td> </tr> <tr> <td>54.00</td> <td>74.00</td> <td>54.00</td> <td>74.00</td> <td>54.00</td> <td>74.00</td> <td>54.00</td> <td>74.00</td> </tr> <tr> <td>-16.37</td> <td>-21.89</td> <td>-10.55</td> <td>-20.56</td> <td>-6.16</td> <td>-22.63</td> <td>-11.03</td> <td>-21.20</td> </tr> <tr> <td>42.28</td> <td>56.76</td> <td>48.34</td> <td>58.33</td> <td>48.38</td> <td>51.91</td> <td>37.75</td> <td>47.58</td> </tr> <tr> <td>-4.65</td> <td>-4.65</td> <td>-4.89</td> <td>-4.89</td> <td>-0.54</td> <td>-0.54</td> <td>5.22</td> <td>5.22</td> </tr> <tr> <td>Average</td> <td>Peak</td> <td>Average</td> <td>Peak</td> <td>Average</td> <td>Peak</td> <td>Average</td> <td>Peak</td> </tr> <tr> <td>306</td> <td>306</td> <td>306</td> <td>306</td> <td>156</td> <td>156</td> <td>100</td> <td>100</td> </tr> <tr> <td>110</td> <td>110</td> <td>110</td> <td>110</td> <td>92</td> <td>92</td> <td>223</td> <td>223</td> </tr> </tbody> </table>	1	2	3	4	5	6	7	8	2390.00	2390.00	2483.50	2483.50	4874.00	4874.00	7311.00	7311.00	37.63	52.11	43.45	53.44	47.84	51.37	42.97	52.80	54.00	74.00	54.00	74.00	54.00	74.00	54.00	74.00	-16.37	-21.89	-10.55	-20.56	-6.16	-22.63	-11.03	-21.20	42.28	56.76	48.34	58.33	48.38	51.91	37.75	47.58	-4.65	-4.65	-4.89	-4.89	-0.54	-0.54	5.22	5.22	Average	Peak	Average	Peak	Average	Peak	Average	Peak	306	306	306	306	156	156	100	100	110	110	110	110	92	92	223	223	<table border="1"> <thead> <tr> <th>Freq. MHz</th> <th>Emission level dBuV/m</th> <th>Limit dBuV/m</th> <th>Margin dB</th> <th>SA reading dBuV</th> <th>Factor dB/m</th> <th>Remark</th> <th>ANT High cm</th> <th>Turn Table deg</th> </tr> </thead> <tbody> <tr> <td>2390.00</td> <td>37.63</td> <td>54.00</td> <td>-16.37</td> <td>42.28</td> <td>-4.65</td> <td>Average</td> <td>306</td> <td>110</td> </tr> <tr> <td>2390.00</td> <td>52.11</td> <td>74.00</td> <td>-21.89</td> <td>56.76</td> <td>-4.65</td> <td>Peak</td> <td>306</td> <td>110</td> </tr> <tr> <td>2483.50</td> <td>43.45</td> <td>54.00</td> <td>-10.55</td> <td>48.34</td> <td>-4.89</td> <td>Average</td> <td>306</td> <td>110</td> </tr> <tr> <td>2483.50</td> <td>53.44</td> <td>74.00</td> <td>-20.56</td> <td>58.33</td> <td>-4.89</td> <td>Peak</td> <td>306</td> <td>110</td> </tr> <tr> <td>4874.00</td> <td>47.84</td> <td>54.00</td> <td>-6.16</td> <td>48.38</td> <td>-0.54</td> <td>Average</td> <td>156</td> <td>92</td> </tr> <tr> <td>4874.00</td> <td>51.37</td> <td>74.00</td> <td>-22.63</td> <td>51.91</td> <td>-0.54</td> <td>Peak</td> <td>156</td> <td>92</td> </tr> <tr> <td>7311.00</td> <td>42.97</td> <td>54.00</td> <td>-11.03</td> <td>37.75</td> <td>5.22</td> <td>Average</td> <td>100</td> <td>223</td> </tr> <tr> <td>7311.00</td> <td>52.80</td> <td>74.00</td> <td>-21.20</td> <td>47.58</td> <td>5.22</td> <td>Peak</td> <td>100</td> <td>223</td> </tr> </tbody> </table>	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	2390.00	37.63	54.00	-16.37	42.28	-4.65	Average	306	110	2390.00	52.11	74.00	-21.89	56.76	-4.65	Peak	306	110	2483.50	43.45	54.00	-10.55	48.34	-4.89	Average	306	110	2483.50	53.44	74.00	-20.56	58.33	-4.89	Peak	306	110	4874.00	47.84	54.00	-6.16	48.38	-0.54	Average	156	92	4874.00	51.37	74.00	-22.63	51.91	-0.54	Peak	156	92	7311.00	42.97	54.00	-11.03	37.75	5.22	Average	100	223	7311.00	52.80	74.00	-21.20	47.58	5.22	Peak	100	223
1	2	3	4	5	6	7	8																																																																																																																																																												
2390.00	2390.00	2483.50	2483.50	4874.00	4874.00	7311.00	7311.00																																																																																																																																																												
37.63	52.11	43.45	53.44	47.84	51.37	42.97	52.80																																																																																																																																																												
54.00	74.00	54.00	74.00	54.00	74.00	54.00	74.00																																																																																																																																																												
-16.37	-21.89	-10.55	-20.56	-6.16	-22.63	-11.03	-21.20																																																																																																																																																												
42.28	56.76	48.34	58.33	48.38	51.91	37.75	47.58																																																																																																																																																												
-4.65	-4.65	-4.89	-4.89	-0.54	-0.54	5.22	5.22																																																																																																																																																												
Average	Peak	Average	Peak	Average	Peak	Average	Peak																																																																																																																																																												
306	306	306	306	156	156	100	100																																																																																																																																																												
110	110	110	110	92	92	223	223																																																																																																																																																												
Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																																																																																											
2390.00	37.63	54.00	-16.37	42.28	-4.65	Average	306	110																																																																																																																																																											
2390.00	52.11	74.00	-21.89	56.76	-4.65	Peak	306	110																																																																																																																																																											
2483.50	43.45	54.00	-10.55	48.34	-4.89	Average	306	110																																																																																																																																																											
2483.50	53.44	74.00	-20.56	58.33	-4.89	Peak	306	110																																																																																																																																																											
4874.00	47.84	54.00	-6.16	48.38	-0.54	Average	156	92																																																																																																																																																											
4874.00	51.37	74.00	-22.63	51.91	-0.54	Peak	156	92																																																																																																																																																											
7311.00	42.97	54.00	-11.03	37.75	5.22	Average	100	223																																																																																																																																																											
7311.00	52.80	74.00	-21.20	47.58	5.22	Peak	100	223																																																																																																																																																											
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																																																																																																																			



Modulation	11b	Test Freq. (MHz)	2462
Polarization	Horizontal		

Test By : Paul Lin      Temperature(°C): 25      Humidity(%): 64

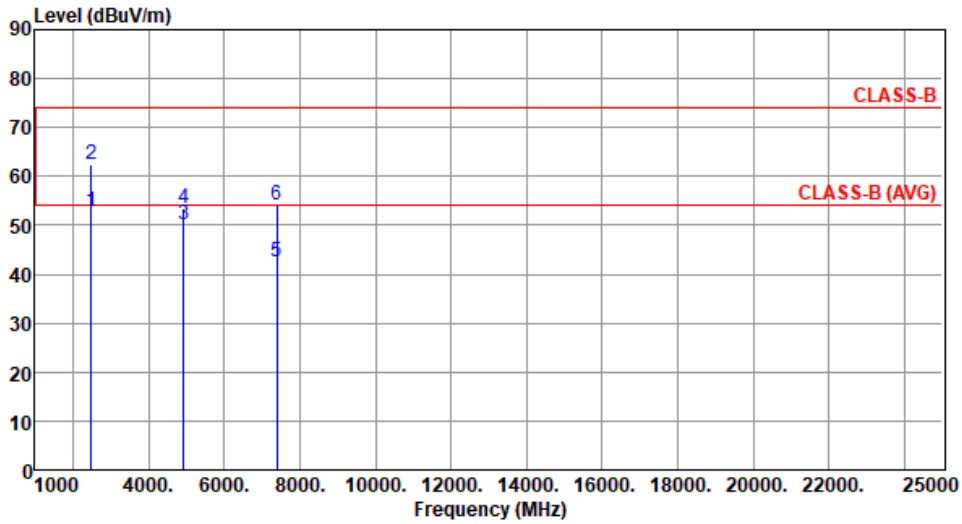

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	2483.50	52.82	54.00	-1.18	57.71	-4.89	Average	210	105
2	2483.50	62.57	74.00	-11.43	67.46	-4.89	Peak	210	105
3	4924.00	50.13	54.00	-3.87	50.64	-0.51	Average	292	222
4	4924.00	53.51	74.00	-20.49	54.02	-0.51	Peak	292	222
5	7386.00	42.58	54.00	-11.42	37.51	5.07	Average	328	256
6	7386.00	54.23	74.00	-19.77	49.16	5.07	Peak	328	256

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor\* (dB/m)

\*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).





Modulation	11b	Test Freq. (MHz)	2462
Polarization	Vertical		

Test By : Paul Lin      Temperature(°C): 25      Humidity(%): 64

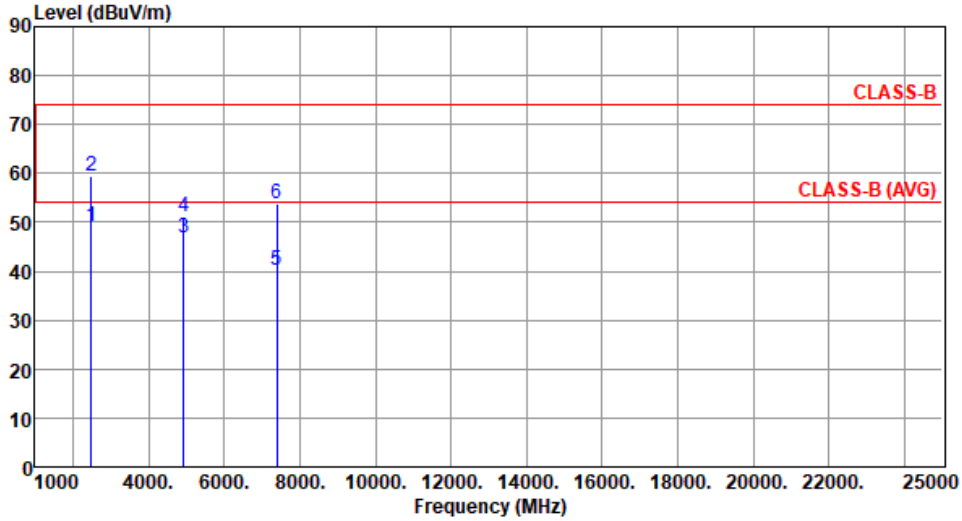

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	2483.50	49.05	54.00	-4.95	53.94	-4.89	Average	114	133
2	2483.50	59.30	74.00	-14.70	64.19	-4.89	Peak	114	133
3	4924.00	46.86	54.00	-7.14	47.37	-0.51	Average	106	134
4	4924.00	51.14	74.00	-22.86	51.65	-0.51	Peak	106	134
5	7386.00	40.21	54.00	-13.79	35.14	5.07	Average	100	219
6	7386.00	53.66	74.00	-20.34	48.59	5.07	Peak	100	219

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor\* (dB/m)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Unwanted Emissions (Above 1GHz) for 11g


Modulation	11g	Test Freq. (MHz)	2412						
Polarization	Horizontal								
Test By :Paul Lin      Temperature(°C):25      Humidity(%):64									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	2390.00	52.61	54.00	-1.39	57.26	-4.65	Average	217	100
2	2390.00	70.67	74.00	-3.33	75.32	-4.65	Peak	217	100
3	4824.00	34.23	54.00	-19.77	34.76	-0.53	Average	313	5
4	4824.00	48.04	74.00	-25.96	48.57	-0.53	Peak	313	5
5	12060.00	42.39	54.00	-11.61	36.02	6.37	Average	100	18
6	12060.00	55.56	74.00	-18.44	49.19	6.37	Peak	100	18

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor\* (dB/m)  
 \*Factor includes antenna factor , cable loss and amplifier gain  
 Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	11g	Test Freq. (MHz)	2412
Polarization	Vertical		

Test By :Paul Lin      Temperature(°C):25      Humidity(%):64

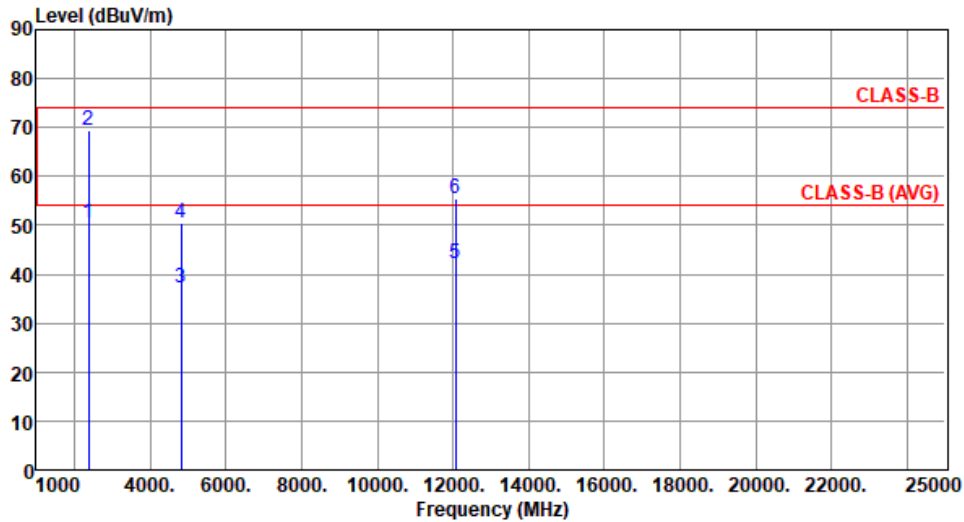

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	2390.00	50.52	54.00	-3.48	55.17	-4.65	Average	100	77
2	2390.00	69.41	74.00	-4.59	74.06	-4.65	Peak	100	77
3	4824.00	37.29	54.00	-16.71	37.82	-0.53	Average	100	142
4	4824.00	50.44	74.00	-23.56	50.97	-0.53	Peak	100	142
5	12060.00	42.25	54.00	-11.75	35.88	6.37	Average	100	29
6	12060.00	55.45	74.00	-18.55	49.08	6.37	Peak	100	29

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor\* (dB/m)


\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	11g	Test Freq. (MHz)	2437
Polarization	Horizontal		

Test By :Paul Lin      Temperature(°C):25      Humidity(%):64

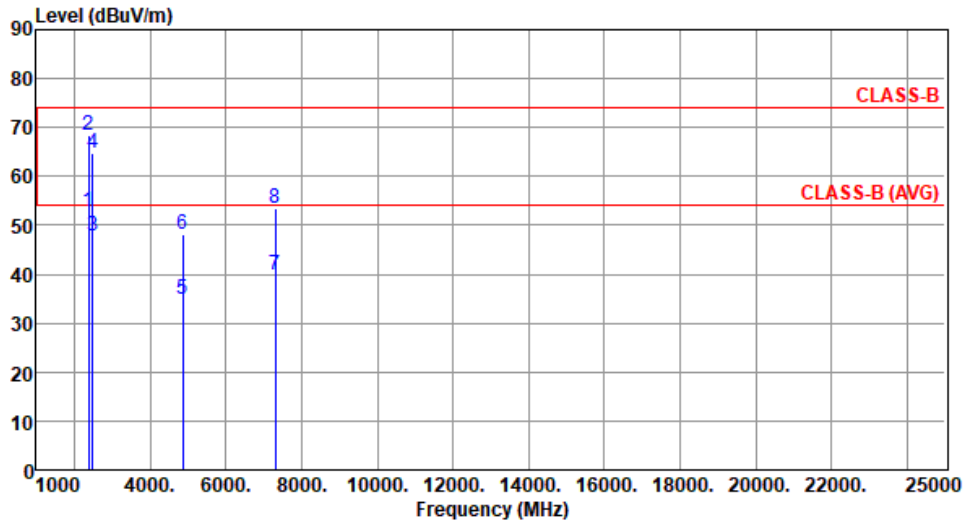

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	2390.00	52.77	54.00	-1.23	57.42	-4.65	Average	195	104
2	2390.00	68.26	74.00	-5.74	72.91	-4.65	Peak	195	104
3	2483.50	47.93	54.00	-6.07	52.82	-4.89	Average	195	104
4	2483.50	64.75	74.00	-9.25	69.64	-4.89	Peak	195	104
5	4874.00	34.89	54.00	-19.11	35.43	-0.54	Average	290	20
6	4874.00	48.12	74.00	-25.88	48.66	-0.54	Peak	290	20
7	7311.00	39.75	54.00	-14.25	34.53	5.22	Average	100	168
8	7311.00	53.57	74.00	-20.43	48.35	5.22	Peak	100	168

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor\* (dB/m)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).




<b>Modulation</b>	11g	<b>Test Freq. (MHz)</b>	2437																																																																																											
<b>Polarization</b>	Vertical																																																																																													
Test By : Paul Lin      Temperature(°C):25      Humidity(%):64																																																																																														
	<table border="1"> <thead> <tr> <th></th> <th>Freq. MHz</th> <th>Emission level dBuV/m</th> <th>Limit dBuV/m</th> <th>Margin dB</th> <th>SA reading dBuV</th> <th>Factor dB/m</th> <th>Remark</th> <th>ANT High cm</th> <th>Turn Table deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2390.00</td> <td>51.07</td> <td>54.00</td> <td>-2.93</td> <td>55.72</td> <td>-4.65</td> <td>Average</td> <td>100</td> <td>135</td> </tr> <tr> <td>2</td> <td>2390.00</td> <td>68.21</td> <td>74.00</td> <td>-5.79</td> <td>72.86</td> <td>-4.65</td> <td>Peak</td> <td>100</td> <td>135</td> </tr> <tr> <td>3</td> <td>2483.50</td> <td>44.93</td> <td>54.00</td> <td>-9.07</td> <td>49.82</td> <td>-4.89</td> <td>Average</td> <td>100</td> <td>135</td> </tr> <tr> <td>4</td> <td>2483.50</td> <td>61.25</td> <td>74.00</td> <td>-12.75</td> <td>66.14</td> <td>-4.89</td> <td>Peak</td> <td>100</td> <td>135</td> </tr> <tr> <td>5</td> <td>4874.00</td> <td>38.24</td> <td>54.00</td> <td>-15.76</td> <td>38.78</td> <td>-0.54</td> <td>Average</td> <td>100</td> <td>128</td> </tr> <tr> <td>6</td> <td>4874.00</td> <td>52.25</td> <td>74.00</td> <td>-21.75</td> <td>52.79</td> <td>-0.54</td> <td>Peak</td> <td>100</td> <td>128</td> </tr> <tr> <td>7</td> <td>7311.00</td> <td>39.62</td> <td>54.00</td> <td>-14.38</td> <td>34.40</td> <td>5.22</td> <td>Average</td> <td>100</td> <td>182</td> </tr> <tr> <td>8</td> <td>7311.00</td> <td>53.41</td> <td>74.00</td> <td>-20.59</td> <td>48.19</td> <td>5.22</td> <td>Peak</td> <td>100</td> <td>182</td> </tr> </tbody> </table>		Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	2390.00	51.07	54.00	-2.93	55.72	-4.65	Average	100	135	2	2390.00	68.21	74.00	-5.79	72.86	-4.65	Peak	100	135	3	2483.50	44.93	54.00	-9.07	49.82	-4.89	Average	100	135	4	2483.50	61.25	74.00	-12.75	66.14	-4.89	Peak	100	135	5	4874.00	38.24	54.00	-15.76	38.78	-0.54	Average	100	128	6	4874.00	52.25	74.00	-21.75	52.79	-0.54	Peak	100	128	7	7311.00	39.62	54.00	-14.38	34.40	5.22	Average	100	182	8	7311.00	53.41	74.00	-20.59	48.19	5.22	Peak	100	182			
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																					
1	2390.00	51.07	54.00	-2.93	55.72	-4.65	Average	100	135																																																																																					
2	2390.00	68.21	74.00	-5.79	72.86	-4.65	Peak	100	135																																																																																					
3	2483.50	44.93	54.00	-9.07	49.82	-4.89	Average	100	135																																																																																					
4	2483.50	61.25	74.00	-12.75	66.14	-4.89	Peak	100	135																																																																																					
5	4874.00	38.24	54.00	-15.76	38.78	-0.54	Average	100	128																																																																																					
6	4874.00	52.25	74.00	-21.75	52.79	-0.54	Peak	100	128																																																																																					
7	7311.00	39.62	54.00	-14.38	34.40	5.22	Average	100	182																																																																																					
8	7311.00	53.41	74.00	-20.59	48.19	5.22	Peak	100	182																																																																																					
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																																														



Modulation	11g	Test Freq. (MHz)	2462
Polarization	Horizontal		

Test By : Paul Lin      Temperature(°C): 25      Humidity(%): 64

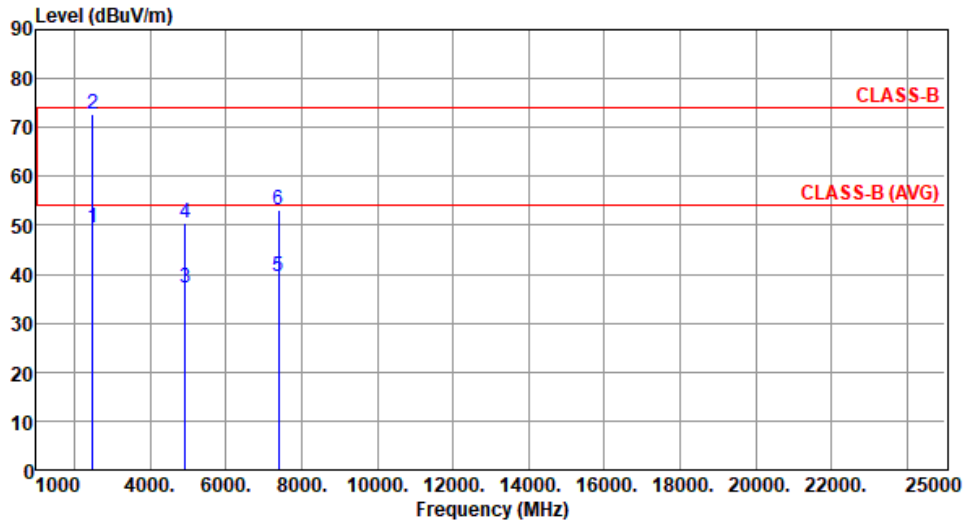

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	2483.50	49.40	54.00	-4.60	54.29	-4.89	Average	200	103
2	2483.50	72.76	74.00	-1.24	77.65	-4.89	Peak	200	103
3	4924.00	37.28	54.00	-16.72	37.79	-0.51	Average	295	26
4	4924.00	50.44	74.00	-23.56	50.95	-0.51	Peak	295	26
5	7386.00	39.42	54.00	-14.58	34.35	5.07	Average	100	165
6	7386.00	53.15	74.00	-20.85	48.08	5.07	Peak	100	165

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor\* (dB/m)


\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	11g	Test Freq. (MHz)	2462
Polarization	Vertical		

Test By :Paul Lin      Temperature(°C):25      Humidity(%):64

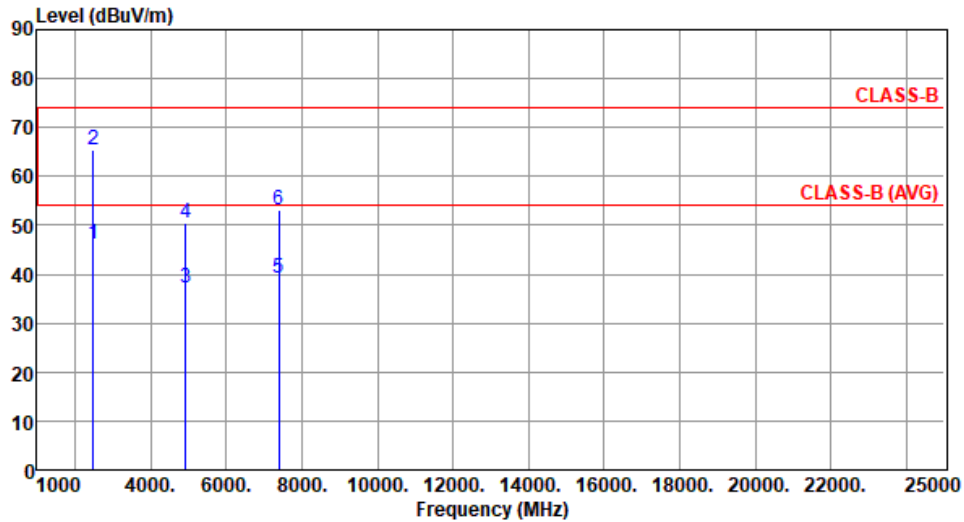

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	2483.50	46.26	54.00	-7.74	51.15	-4.89	Average	100	112
2	2483.50	65.28	74.00	-8.72	70.17	-4.89	Peak	100	112
3	4924.00	37.11	54.00	-16.89	37.62	-0.51	Average	100	145
4	4924.00	50.35	74.00	-23.65	50.86	-0.51	Peak	100	145
5	7386.00	39.28	54.00	-14.72	34.21	5.07	Average	100	185
6	7386.00	53.04	74.00	-20.96	47.97	5.07	Peak	100	185

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor\* (dB/m)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Unwanted Emissions (Above 1GHz) for HT20

Modulation	HT20	Test Freq. (MHz)	2412						
Polarization	Horizontal								
Test By :Paul Lin      Temperature(°C):25      Humidity(%):64									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	2390.00	52.36	54.00	-1.64	57.01	-4.65	Average	217	100
2	2390.00	72.19	74.00	-1.81	76.84	-4.65	Peak	217	100
3	4824.00	37.45	54.00	-16.55	37.98	-0.53	Average	295	23
4	4824.00	50.62	74.00	-23.38	51.15	-0.53	Peak	295	23
5	12060.00	42.31	54.00	-11.69	35.94	6.37	Average	100	15
6	12060.00	55.49	74.00	-18.51	49.12	6.37	Peak	100	15
<p>Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)            *Factor includes antenna factor , cable loss and amplifier gain            Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).</p>									





<b>Modulation</b>	HT20	<b>Test Freq. (MHz)</b>	2412						
<b>Polarization</b>	Vertical								
Test By :Paul Lin      Temperature(°C):25      Humidity(%):64									
	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg
1	2390.00	50.49	54.00	-3.51	55.14	-4.65	Average	100	77
2	2390.00	69.56	74.00	-4.44	74.21	-4.65	Peak	100	77
3	4824.00	37.16	54.00	-16.84	37.69	-0.53	Average	100	149
4	4824.00	50.35	74.00	-23.65	50.88	-0.53	Peak	100	149
5	12060.00	42.19	54.00	-11.81	35.82	6.37	Average	100	36
6	12060.00	55.42	74.00	-18.58	49.05	6.37	Peak	100	36

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor\* (dB/m)  
 \*Factor includes antenna factor , cable loss and amplifier gain  
 Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



<b>Modulation</b>	HT20	<b>Test Freq. (MHz)</b>	2437																																																																																																																																																																
<b>Polarization</b>	Horizontal																																																																																																																																																																		
Test By : Paul Lin      Temperature(°C): 25      Humidity(%): 64																																																																																																																																																																			
<p>The graph plots Level (dBuV/m) on the y-axis (0 to 90) against Frequency (MHz) on the x-axis (1000 to 25000). Two horizontal red lines represent limits: CLASS-B at approximately 75 dBuV/m and CLASS-B (AVG) at approximately 55 dBuV/m. Eight vertical blue lines represent emission peaks, labeled 1 through 8, with their corresponding levels and frequencies listed in the table below.</p>																																																																																																																																																																			
	<table border="1"> <thead> <tr> <th>1</th> <th>2</th> <th>3</th> <th>4</th> <th>5</th> <th>6</th> <th>7</th> <th>8</th> </tr> </thead> <tbody> <tr> <td>2390.00</td> <td>2390.00</td> <td>2483.50</td> <td>2483.50</td> <td>4874.00</td> <td>4874.00</td> <td>7311.00</td> <td>7311.00</td> </tr> <tr> <td>52.54</td> <td>68.41</td> <td>47.77</td> <td>67.45</td> <td>38.56</td> <td>52.35</td> <td>39.66</td> <td>53.48</td> </tr> <tr> <td>54.00</td> <td>74.00</td> <td>54.00</td> <td>74.00</td> <td>54.00</td> <td>74.00</td> <td>54.00</td> <td>74.00</td> </tr> <tr> <td>-1.46</td> <td>-5.59</td> <td>-6.23</td> <td>-6.55</td> <td>-15.44</td> <td>-21.65</td> <td>-14.34</td> <td>-20.52</td> </tr> <tr> <td>57.19</td> <td>73.06</td> <td>52.66</td> <td>72.34</td> <td>39.10</td> <td>52.89</td> <td>34.44</td> <td>48.26</td> </tr> <tr> <td>-4.65</td> <td>-4.65</td> <td>-4.89</td> <td>-4.89</td> <td>-0.54</td> <td>-0.54</td> <td>5.22</td> <td>5.22</td> </tr> <tr> <td>Average</td> <td>Peak</td> <td>Average</td> <td>Peak</td> <td>Average</td> <td>Peak</td> <td>Average</td> <td>Peak</td> </tr> <tr> <td>212</td> <td>212</td> <td>212</td> <td>212</td> <td>212</td> <td>265</td> <td>100</td> <td>100</td> </tr> <tr> <td>103</td> <td>103</td> <td>103</td> <td>103</td> <td>103</td> <td>24</td> <td>162</td> <td>162</td> </tr> </tbody> </table>	1	2	3	4	5	6	7	8	2390.00	2390.00	2483.50	2483.50	4874.00	4874.00	7311.00	7311.00	52.54	68.41	47.77	67.45	38.56	52.35	39.66	53.48	54.00	74.00	54.00	74.00	54.00	74.00	54.00	74.00	-1.46	-5.59	-6.23	-6.55	-15.44	-21.65	-14.34	-20.52	57.19	73.06	52.66	72.34	39.10	52.89	34.44	48.26	-4.65	-4.65	-4.89	-4.89	-0.54	-0.54	5.22	5.22	Average	Peak	Average	Peak	Average	Peak	Average	Peak	212	212	212	212	212	265	100	100	103	103	103	103	103	24	162	162	<table border="1"> <thead> <tr> <th>Freq. MHz</th> <th>Emission level dBuV/m</th> <th>Limit dBuV/m</th> <th>Margin dB</th> <th>SA reading dBuV</th> <th>Factor dB/m</th> <th>Remark</th> <th>ANT High cm</th> <th>Turn Table deg</th> </tr> </thead> <tbody> <tr> <td>2390.00</td> <td>52.54</td> <td>54.00</td> <td>-1.46</td> <td>57.19</td> <td>-4.65</td> <td>Average</td> <td>212</td> <td>103</td> </tr> <tr> <td>2390.00</td> <td>68.41</td> <td>74.00</td> <td>-5.59</td> <td>73.06</td> <td>-4.65</td> <td>Peak</td> <td>212</td> <td>103</td> </tr> <tr> <td>2483.50</td> <td>47.77</td> <td>54.00</td> <td>-6.23</td> <td>52.66</td> <td>-4.89</td> <td>Average</td> <td>212</td> <td>103</td> </tr> <tr> <td>2483.50</td> <td>67.45</td> <td>74.00</td> <td>-6.55</td> <td>72.34</td> <td>-4.89</td> <td>Peak</td> <td>212</td> <td>103</td> </tr> <tr> <td>4874.00</td> <td>38.56</td> <td>54.00</td> <td>-15.44</td> <td>39.10</td> <td>-0.54</td> <td>Average</td> <td>212</td> <td>103</td> </tr> <tr> <td>4874.00</td> <td>52.35</td> <td>74.00</td> <td>-21.65</td> <td>52.89</td> <td>-0.54</td> <td>Peak</td> <td>265</td> <td>24</td> </tr> <tr> <td>7311.00</td> <td>39.66</td> <td>54.00</td> <td>-14.34</td> <td>34.44</td> <td>5.22</td> <td>Average</td> <td>100</td> <td>162</td> </tr> <tr> <td>7311.00</td> <td>53.48</td> <td>74.00</td> <td>-20.52</td> <td>48.26</td> <td>5.22</td> <td>Peak</td> <td>100</td> <td>162</td> </tr> </tbody> </table>	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	2390.00	52.54	54.00	-1.46	57.19	-4.65	Average	212	103	2390.00	68.41	74.00	-5.59	73.06	-4.65	Peak	212	103	2483.50	47.77	54.00	-6.23	52.66	-4.89	Average	212	103	2483.50	67.45	74.00	-6.55	72.34	-4.89	Peak	212	103	4874.00	38.56	54.00	-15.44	39.10	-0.54	Average	212	103	4874.00	52.35	74.00	-21.65	52.89	-0.54	Peak	265	24	7311.00	39.66	54.00	-14.34	34.44	5.22	Average	100	162	7311.00	53.48	74.00	-20.52	48.26	5.22	Peak	100	162
1	2	3	4	5	6	7	8																																																																																																																																																												
2390.00	2390.00	2483.50	2483.50	4874.00	4874.00	7311.00	7311.00																																																																																																																																																												
52.54	68.41	47.77	67.45	38.56	52.35	39.66	53.48																																																																																																																																																												
54.00	74.00	54.00	74.00	54.00	74.00	54.00	74.00																																																																																																																																																												
-1.46	-5.59	-6.23	-6.55	-15.44	-21.65	-14.34	-20.52																																																																																																																																																												
57.19	73.06	52.66	72.34	39.10	52.89	34.44	48.26																																																																																																																																																												
-4.65	-4.65	-4.89	-4.89	-0.54	-0.54	5.22	5.22																																																																																																																																																												
Average	Peak	Average	Peak	Average	Peak	Average	Peak																																																																																																																																																												
212	212	212	212	212	265	100	100																																																																																																																																																												
103	103	103	103	103	24	162	162																																																																																																																																																												
Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																																																																																											
2390.00	52.54	54.00	-1.46	57.19	-4.65	Average	212	103																																																																																																																																																											
2390.00	68.41	74.00	-5.59	73.06	-4.65	Peak	212	103																																																																																																																																																											
2483.50	47.77	54.00	-6.23	52.66	-4.89	Average	212	103																																																																																																																																																											
2483.50	67.45	74.00	-6.55	72.34	-4.89	Peak	212	103																																																																																																																																																											
4874.00	38.56	54.00	-15.44	39.10	-0.54	Average	212	103																																																																																																																																																											
4874.00	52.35	74.00	-21.65	52.89	-0.54	Peak	265	24																																																																																																																																																											
7311.00	39.66	54.00	-14.34	34.44	5.22	Average	100	162																																																																																																																																																											
7311.00	53.48	74.00	-20.52	48.26	5.22	Peak	100	162																																																																																																																																																											
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																																																																																																																			




<b>Modulation</b>	HT20	<b>Test Freq. (MHz)</b>	2437						
<b>Polarization</b>	Vertical								
Test By : Paul Lin      Temperature(°C):25      Humidity(%):64									
	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg
1	2390.00	49.77	54.00	-4.23	54.42	-4.65	Average	100	77
2	2390.00	65.97	74.00	-8.03	70.62	-4.65	Peak	100	77
3	2483.50	43.78	54.00	-10.22	48.67	-4.89	Average	100	77
4	2483.50	63.65	74.00	-10.35	68.54	-4.89	Peak	100	77
5	4874.00	38.11	54.00	-15.89	38.65	-0.54	Average	100	131
6	4874.00	52.19	74.00	-21.81	52.73	-0.54	Peak	100	131
7	7311.00	39.54	54.00	-14.46	34.32	5.22	Average	100	186
8	7311.00	53.35	74.00	-20.65	48.13	5.22	Peak	100	186

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor\* (dB/m)  
 \*Factor includes antenna factor , cable loss and amplifier gain  
 Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	HT20	Test Freq. (MHz)	2462
Polarization	Horizontal		

Test By : Paul Lin      Temperature(°C): 25      Humidity(%): 64

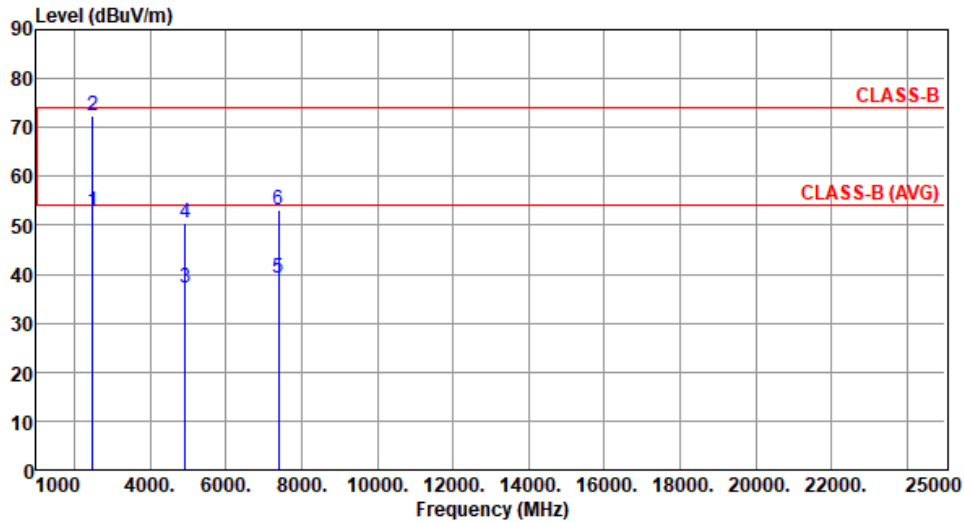

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	2483.50	52.95	54.00	-1.05	57.84	-4.89	Average	207	102
2	2483.50	72.56	74.00	-1.44	77.45	-4.89	Peak	207	102
3	4924.00	37.25	54.00	-16.75	37.76	-0.51	Average	294	28
4	4924.00	50.36	74.00	-23.64	50.87	-0.51	Peak	294	28
5	7386.00	39.35	54.00	-14.65	34.28	5.07	Average	100	161
6	7386.00	53.08	74.00	-20.92	48.01	5.07	Peak	100	161

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor\* (dB/m)


\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	HT20	Test Freq. (MHz)	2462
Polarization	Vertical		

Test By :Paul Lin      Temperature(°C):25      Humidity(%):64


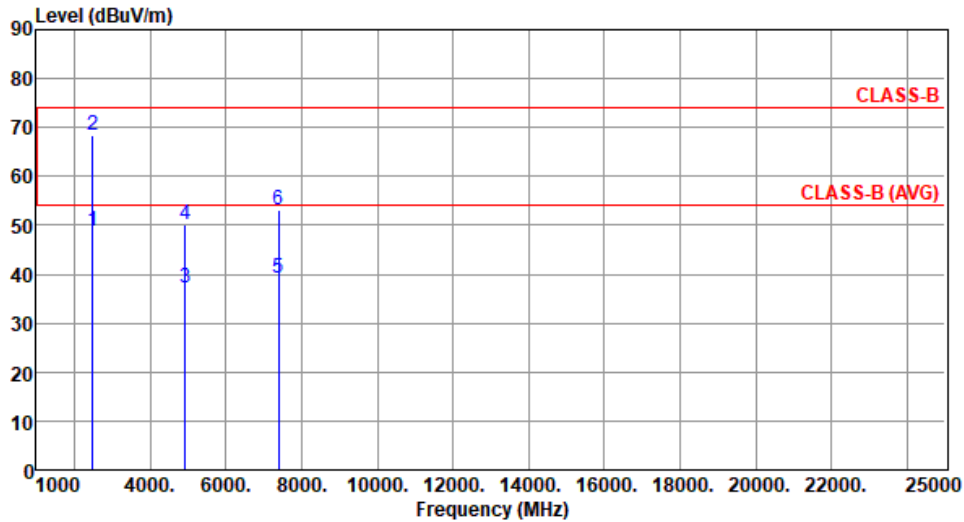




	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	2483.50	48.91	54.00	-5.09	53.80	-4.89	Average	100	78
2	2483.50	68.26	74.00	-5.74	73.15	-4.89	Peak	100	78
3	4924.00	37.05	54.00	-16.95	37.56	-0.51	Average	100	148
4	4924.00	50.28	74.00	-23.72	50.79	-0.51	Peak	100	148
5	7386.00	39.24	54.00	-14.76	34.17	5.07	Average	100	162
6	7386.00	53.11	74.00	-20.89	48.04	5.07	Peak	100	162



Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor\* (dB/m)

\*Factor includes antenna factor , cable loss and amplifier gain



Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

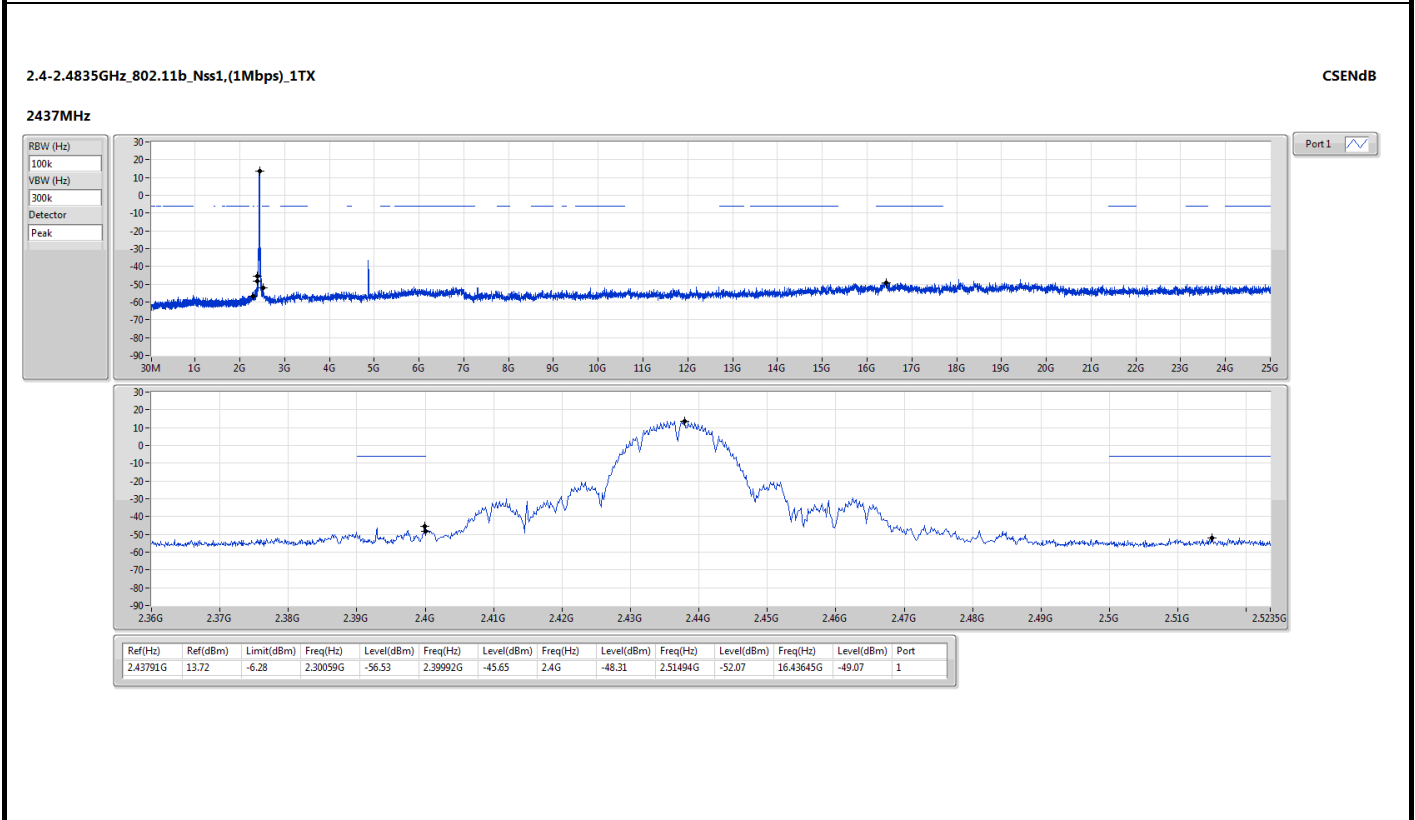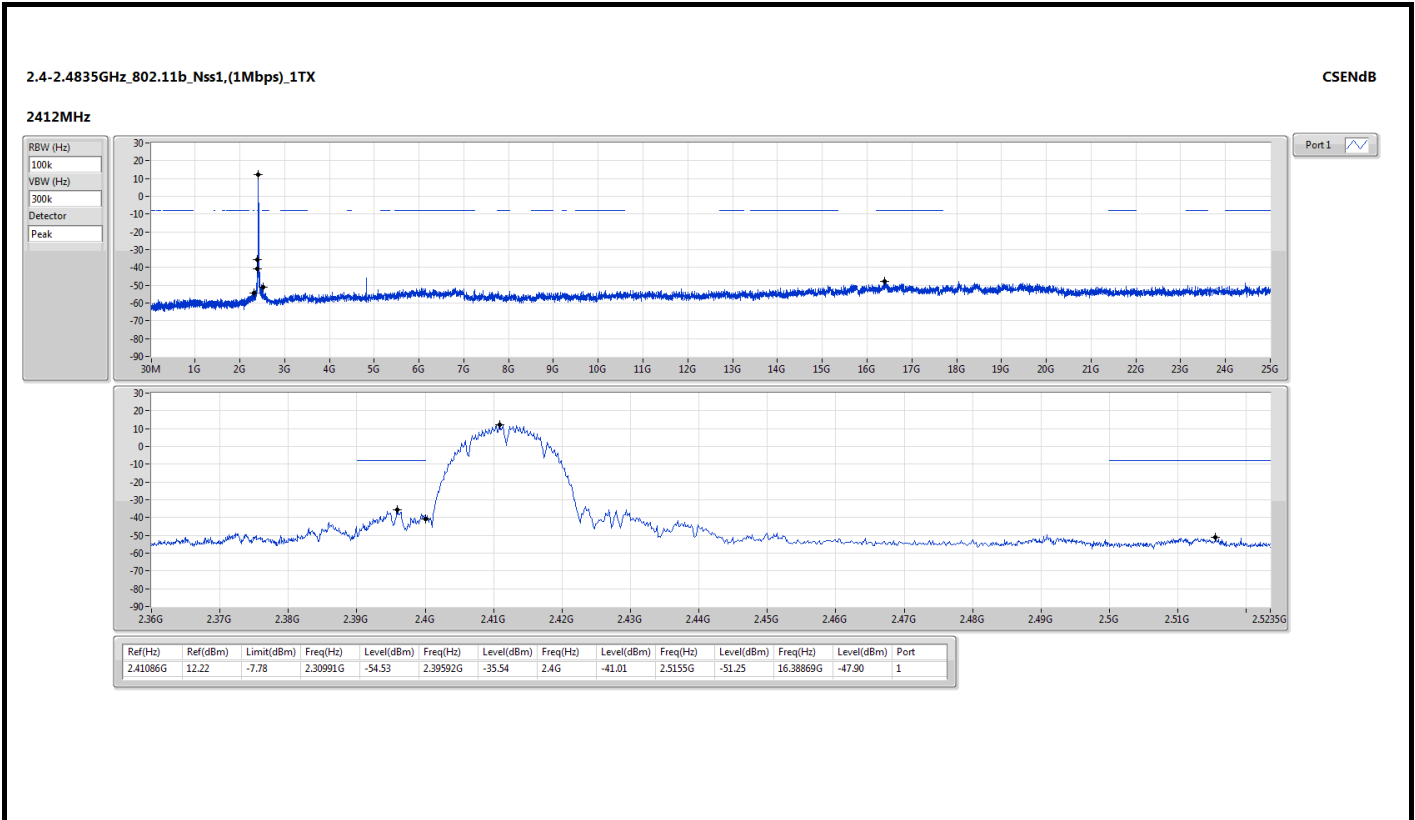


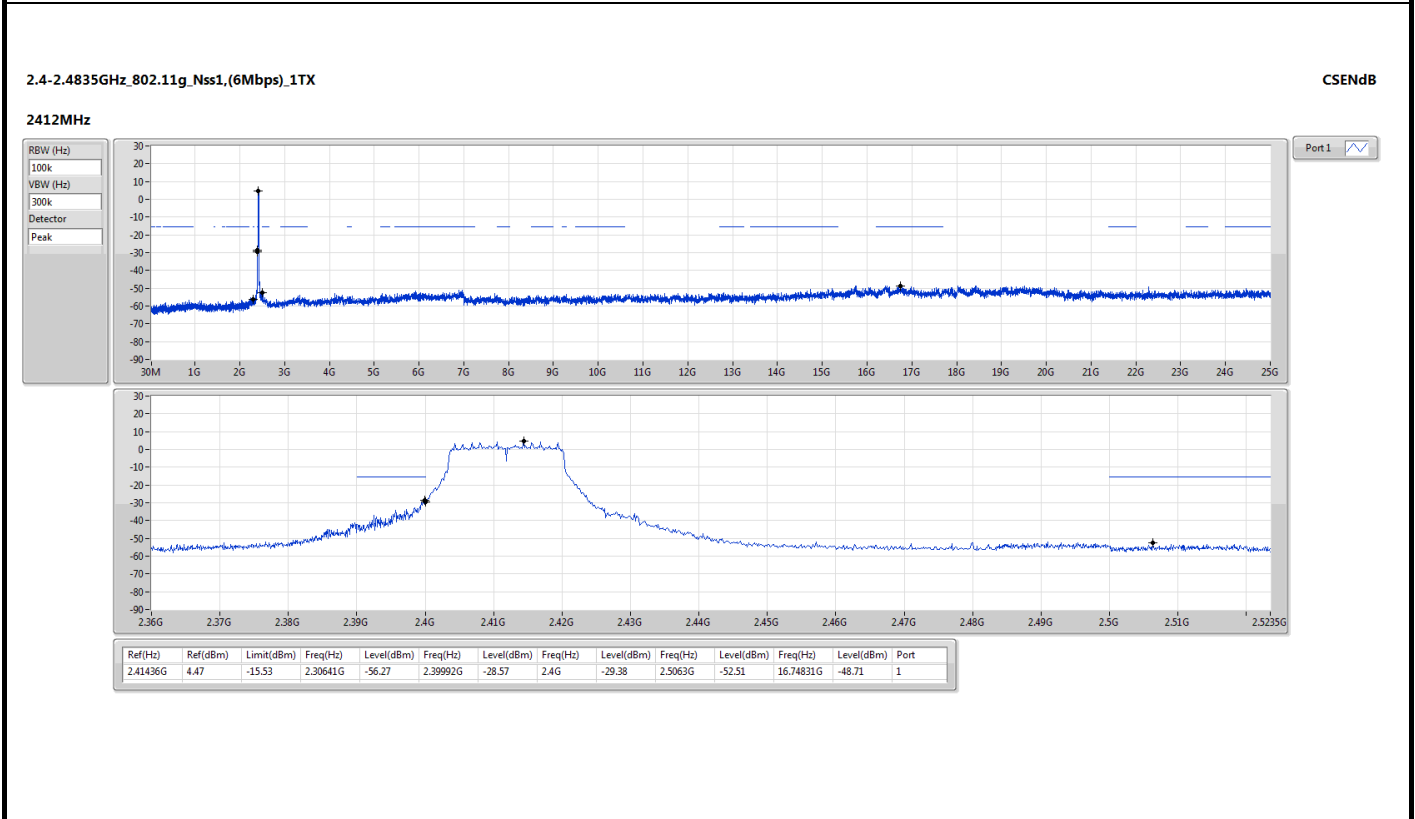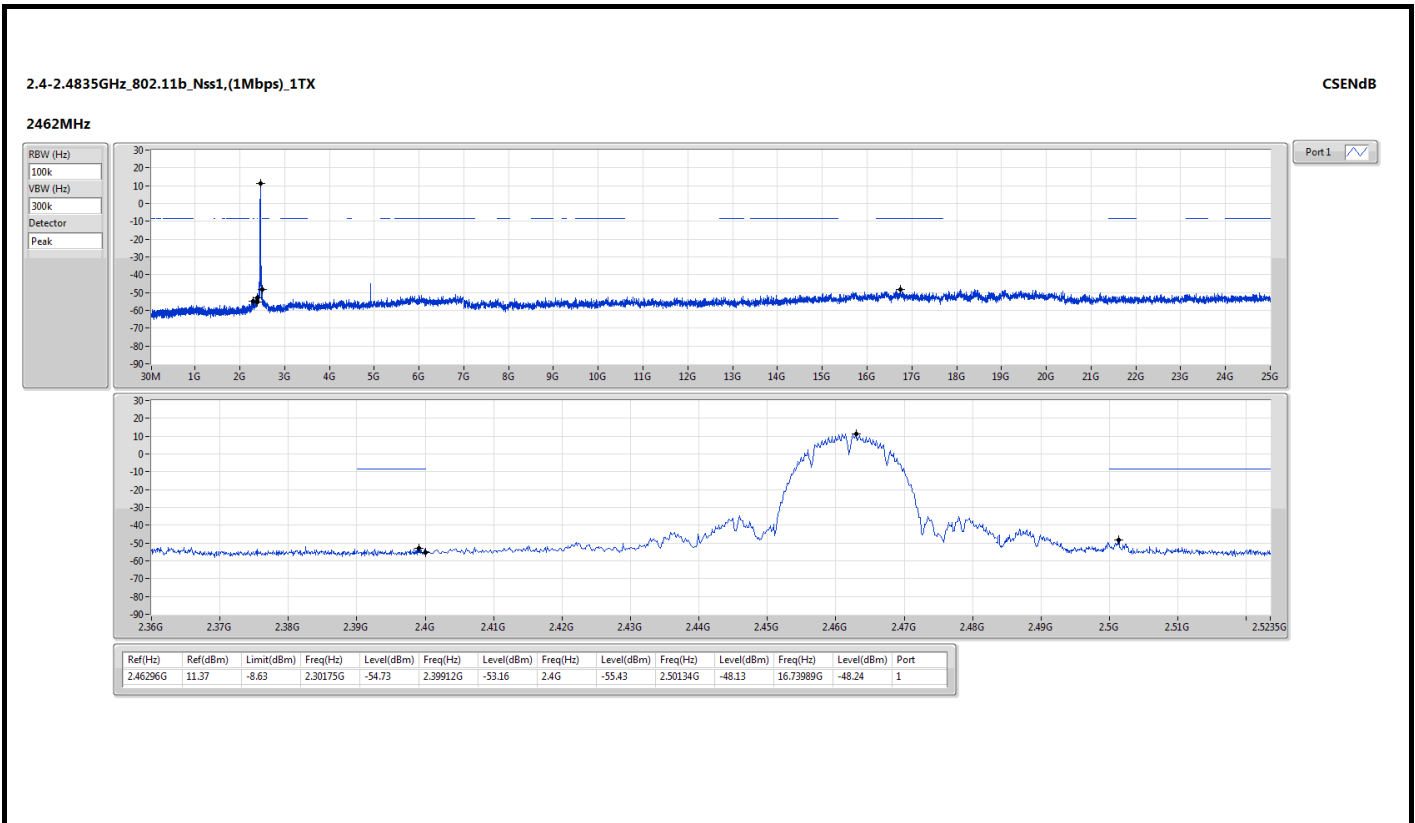

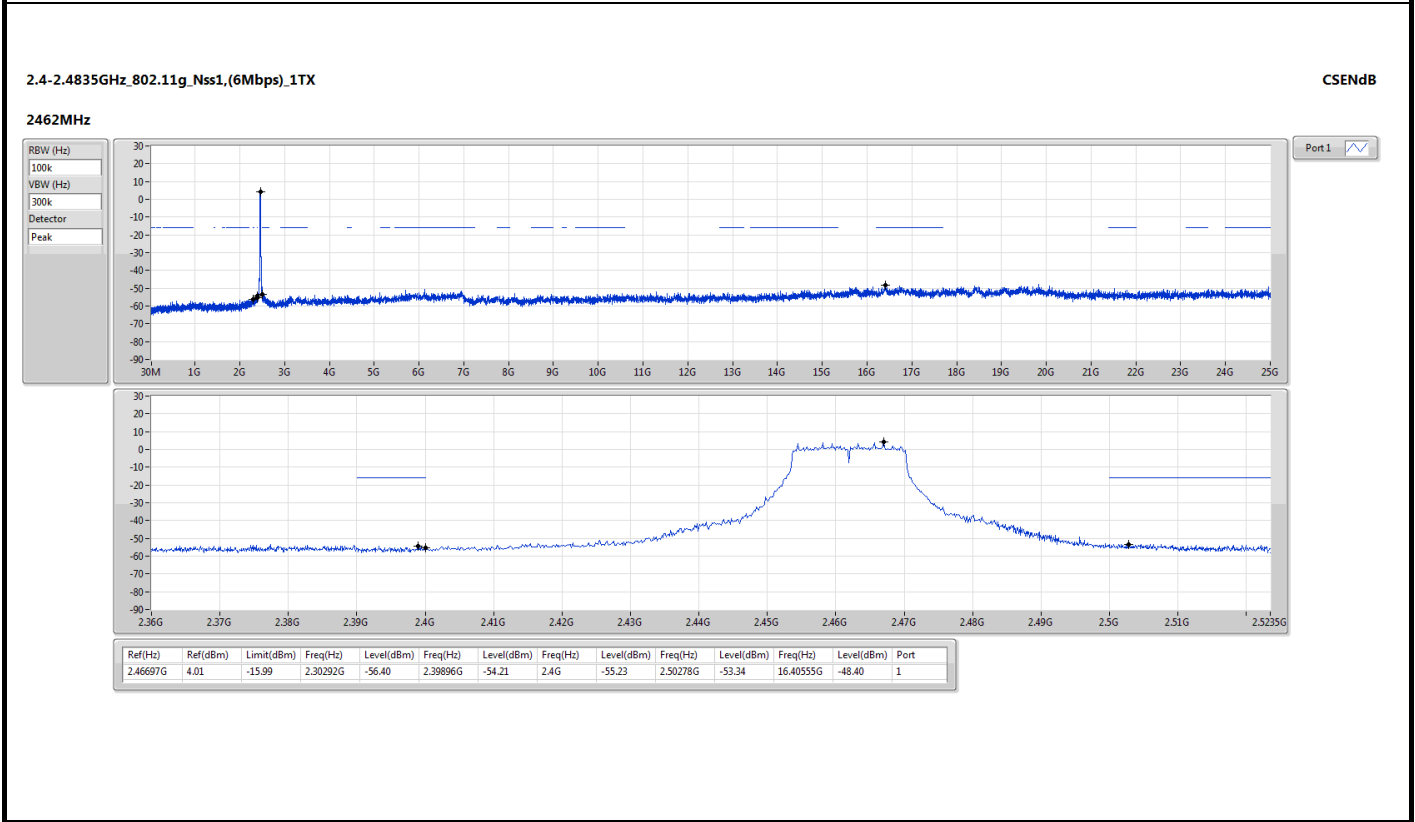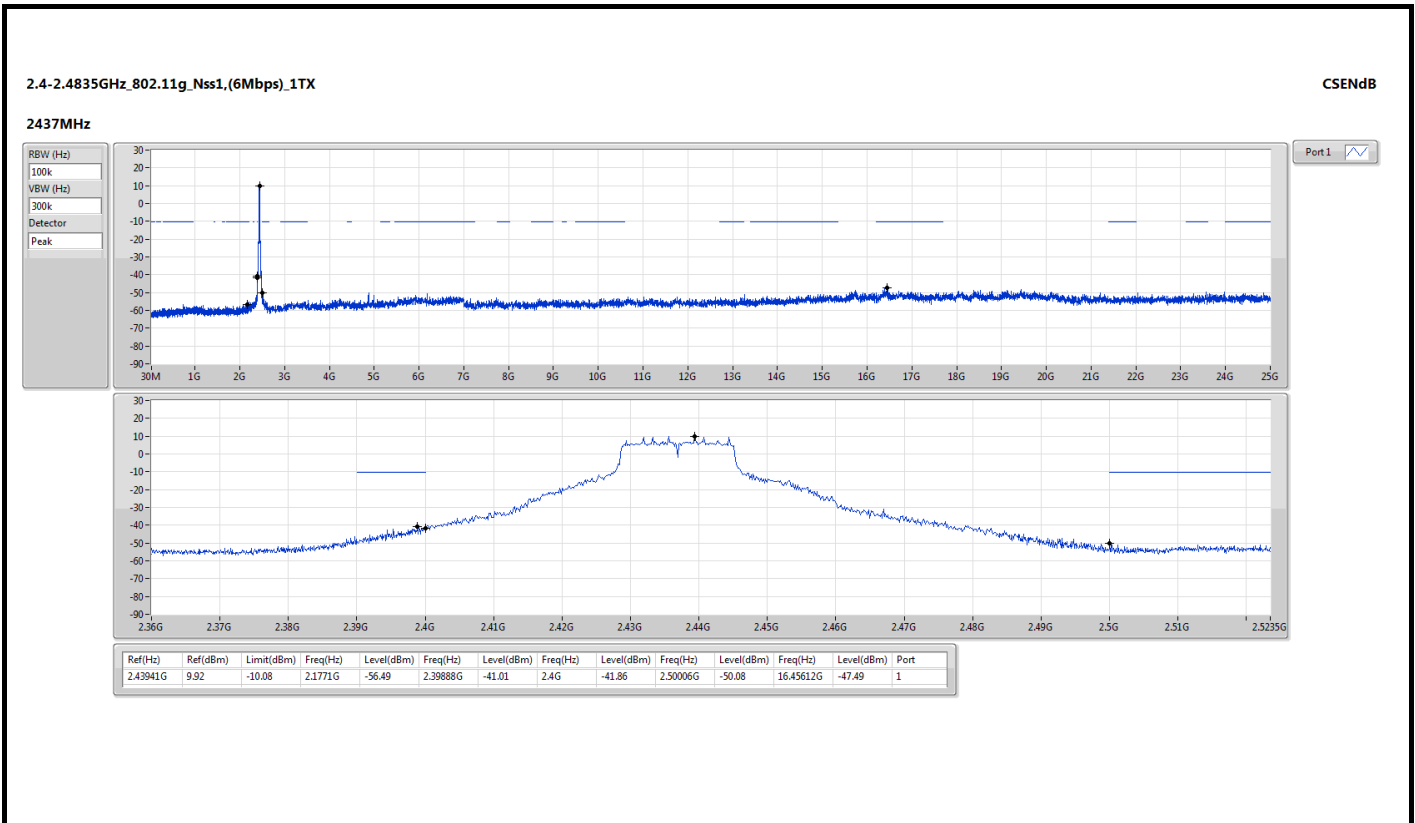



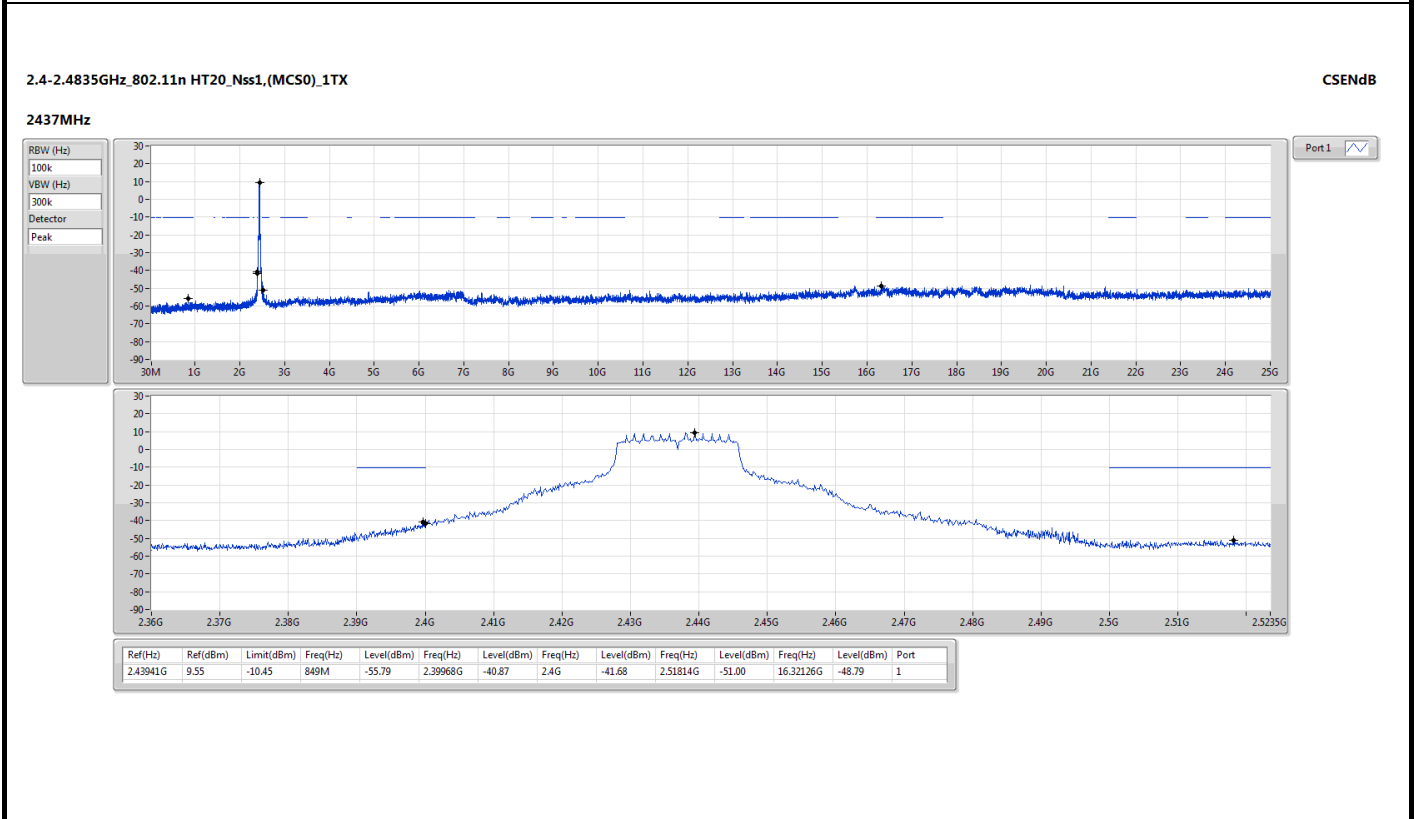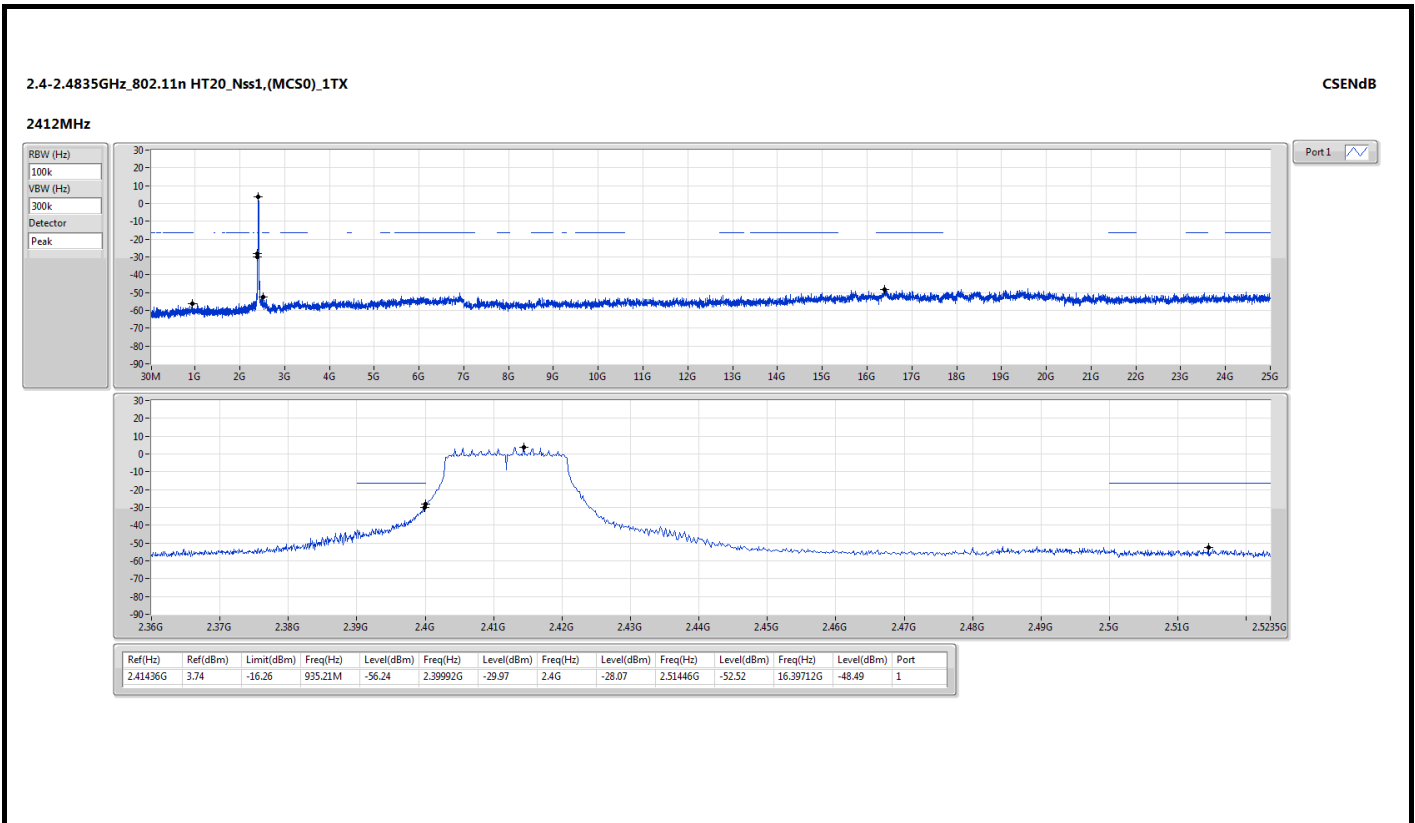


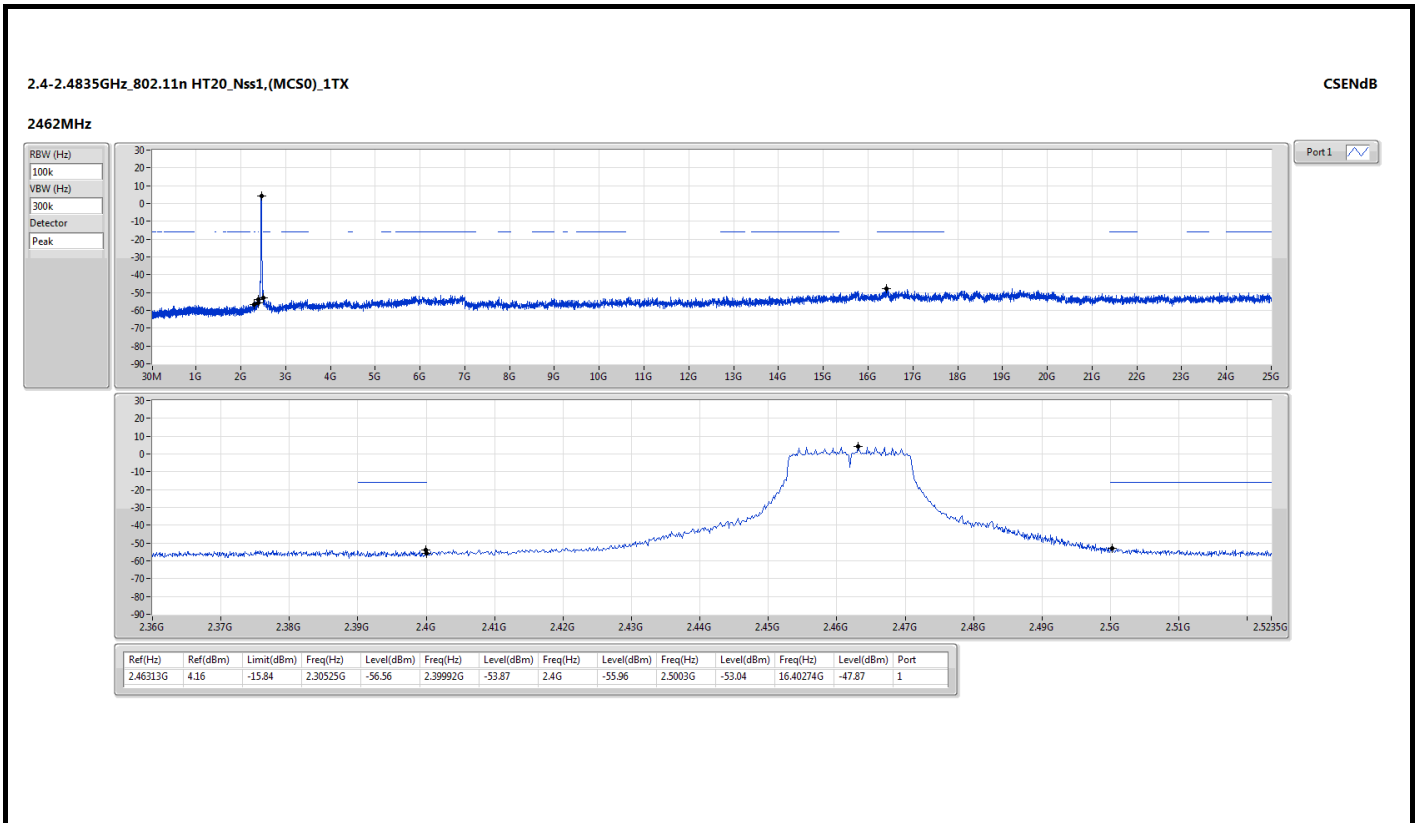



Modulation Mode	11g	Test Freq. (MHz)	2437
Power Phase	Line		

Test by : Joe Liao      Temperature: 22°C      Humidity: 68%

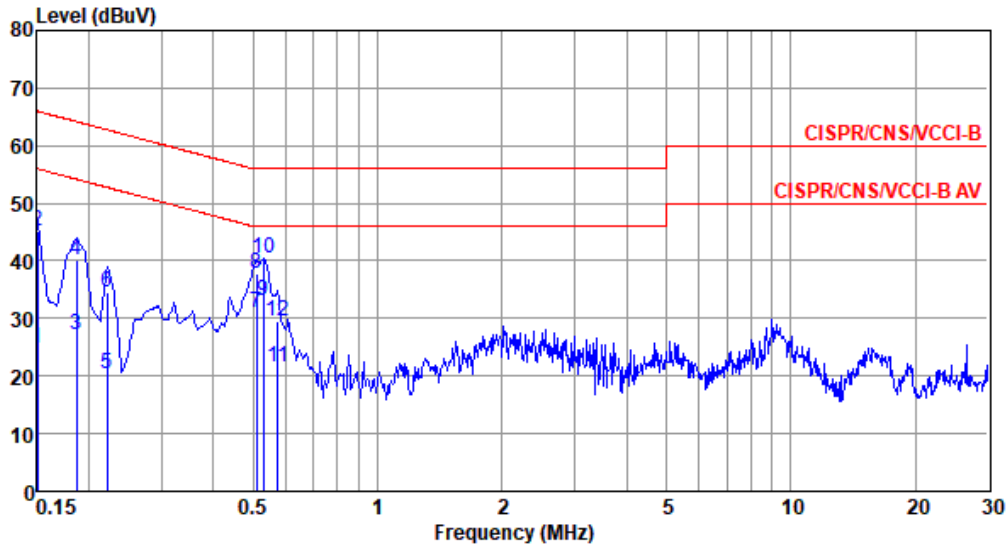


	Freq MHz	Level dBuV	Limit Line dBuV	Over Limit dB	Read Level dBuV	Factor dB	Cable loss dB	Aux dB	Remark
1	0.150	24.68	56.00	-31.32	14.99	9.63	0.06	0.00	Average
2	0.150	45.18	66.00	-20.82	35.49	9.63	0.06	0.00	QP
3	0.186	27.25	54.20	-26.95	17.57	9.62	0.06	0.00	Average
4	0.186	40.25	64.20	-23.95	30.57	9.62	0.06	0.00	QP
5	0.222	20.46	52.74	-32.28	10.78	9.62	0.06	0.00	Average
6	0.222	34.68	62.74	-28.06	25.00	9.62	0.06	0.00	QP
7	0.510	30.90	46.00	-15.10	21.21	9.62	0.07	0.00	Average
8	0.510	37.76	56.00	-18.24	28.07	9.62	0.07	0.00	QP
9*	0.529	32.98	46.00	-13.02	23.28	9.62	0.08	0.00	Average
10	0.529	40.53	56.00	-15.47	30.83	9.62	0.08	0.00	QP
11	0.573	21.45	46.00	-24.55	11.75	9.62	0.08	0.00	Average
12	0.573	29.61	56.00	-26.39	19.91	9.62	0.08	0.00	QP

Note 1: Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB) + Aux (dB).  
 Note 2: Over Limit (dB) = Level (dBuV) - Limit Line (dBuV).



Modulation Mode	11g	Test Freq. (MHz)	2437
Power Phase	Neutral		

Test by : Joe Liao      Temperature: 22°C      Humidity: 68%

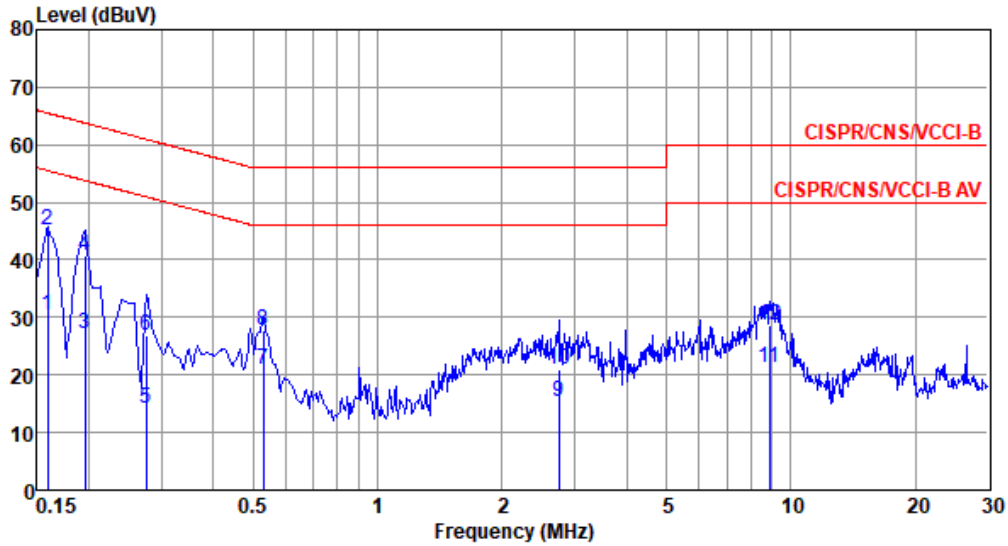

	Freq MHz	Level dBUV	Limit Line dBUV	Over Limit dB	Read Level dBUV	Factor dB	Cable loss dB	Aux dB	Remark
1	0.159	30.46	55.52	-25.06	20.77	9.63	0.06	0.00	Average
2*	0.159	45.20	65.52	-20.32	35.51	9.63	0.06	0.00	QP
3	0.195	27.11	53.80	-26.69	17.42	9.63	0.06	0.00	Average
4	0.195	40.79	63.80	-23.01	31.10	9.63	0.06	0.00	QP
5	0.276	14.16	50.94	-36.78	4.47	9.63	0.06	0.00	Average
6	0.276	26.74	60.94	-34.20	17.05	9.63	0.06	0.00	QP
7	0.529	20.98	46.00	-25.02	11.28	9.62	0.08	0.00	Average
8	0.529	27.81	56.00	-28.19	18.11	9.62	0.08	0.00	QP
9	2.750	15.26	46.00	-30.74	5.47	9.64	0.15	0.00	Average
10	2.750	21.03	56.00	-34.97	11.24	9.64	0.15	0.00	QP
11	8.869	21.33	50.00	-28.67	11.29	9.70	0.34	0.00	Average
12	8.869	28.63	60.00	-31.37	18.59	9.70	0.34	0.00	QP

Note 1: Level (dBUV) = Read Level (dBUV) + LISN Factor (dB) + Cable Loss (dB) + Aux (dB).  
 Note 2: Over Limit (dB) = Level (dBUV) – Limit Line (dBUV).