


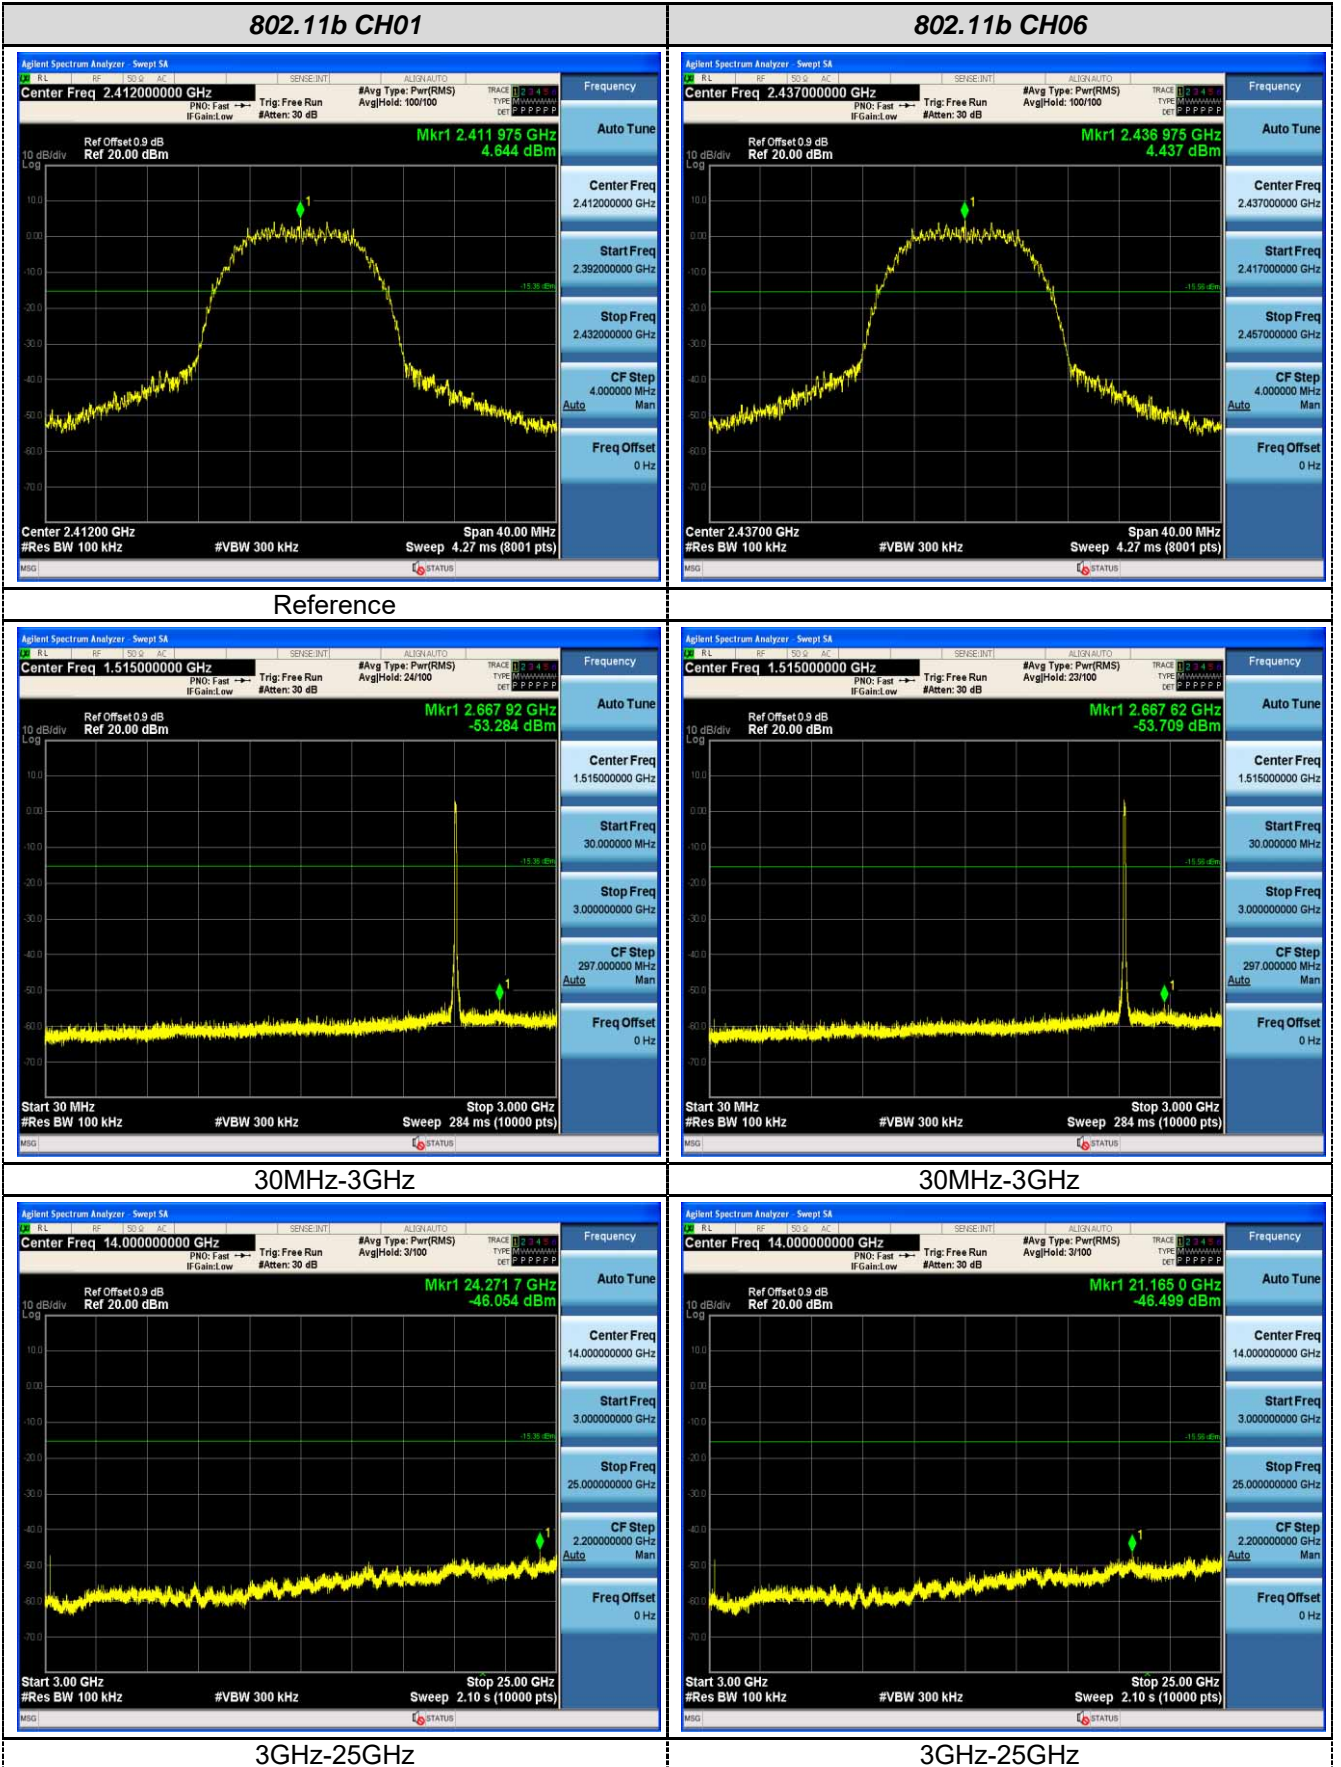
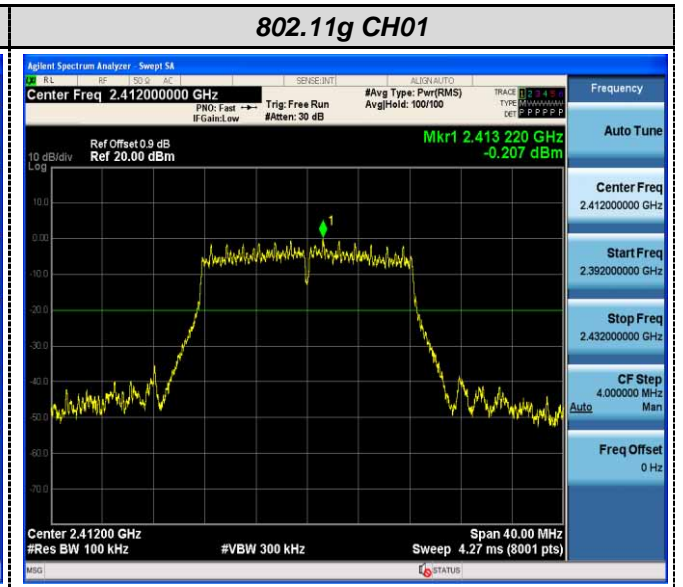


Ant2

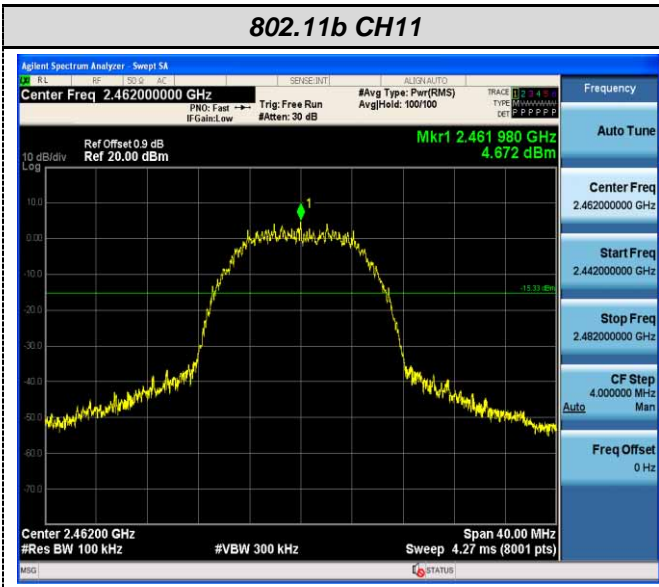


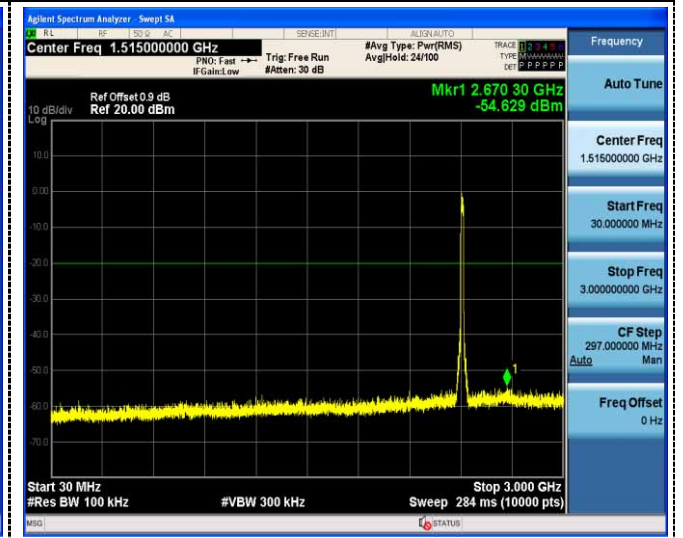


### Reference

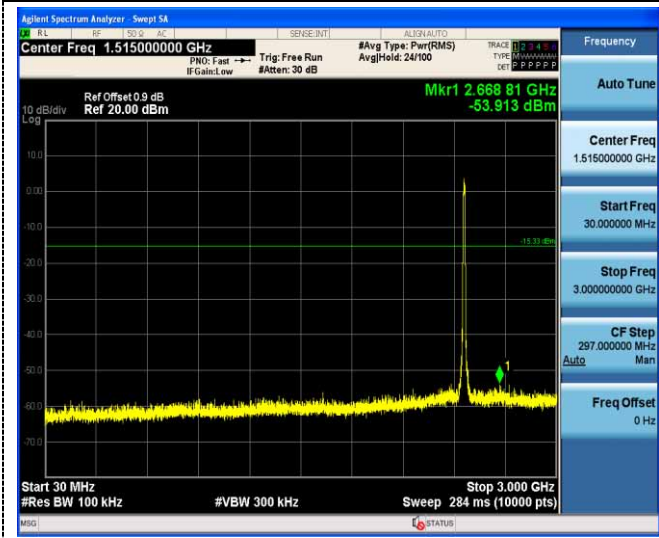

### 30MHz-3GHz


### 30MHz-3GHz

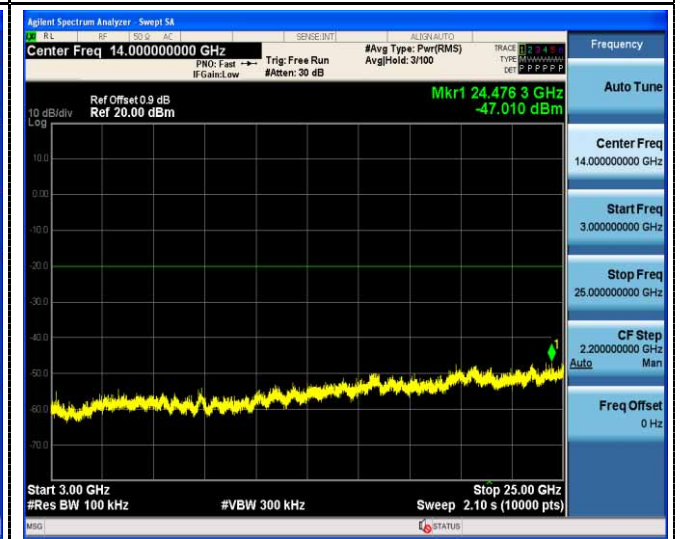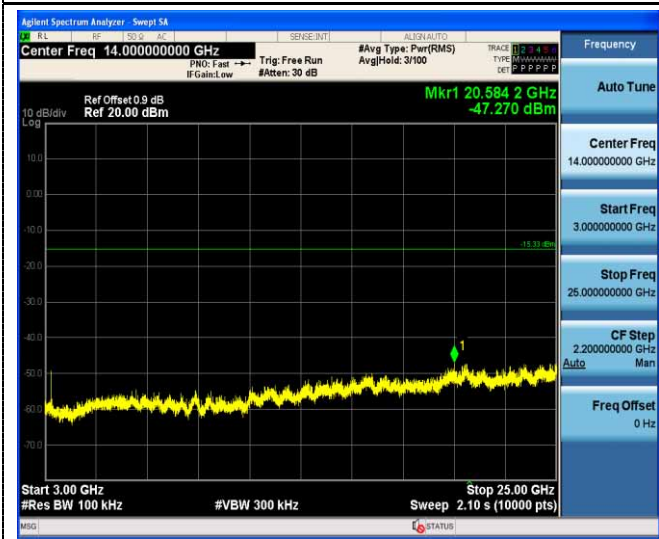


### 3GHz-25GHz

### 3GHz-25GHz



### 802.11g CH06

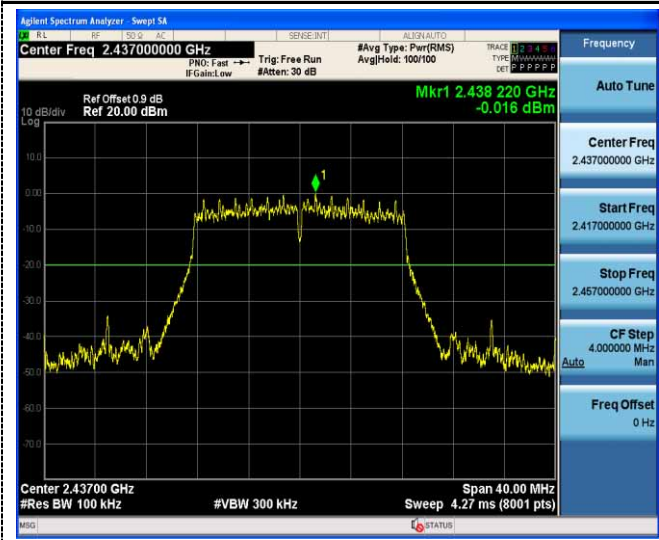


### 802.11g CH11

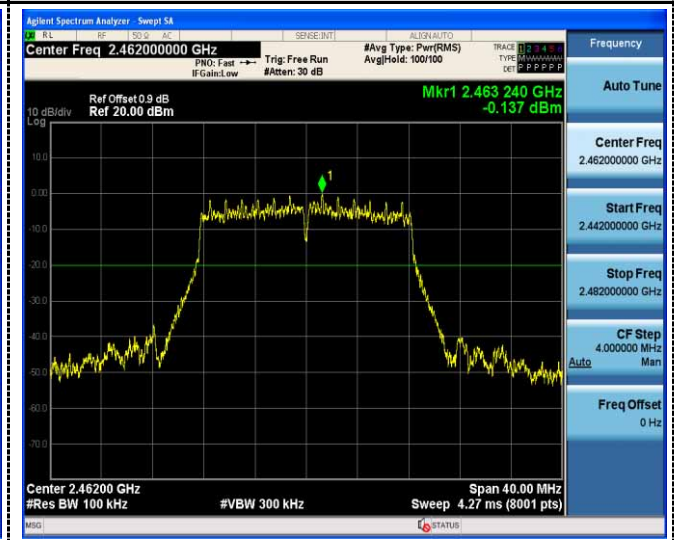


### Reference

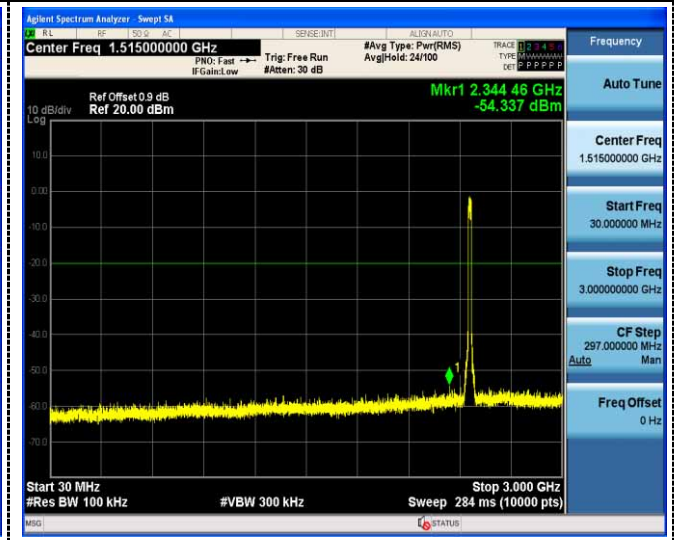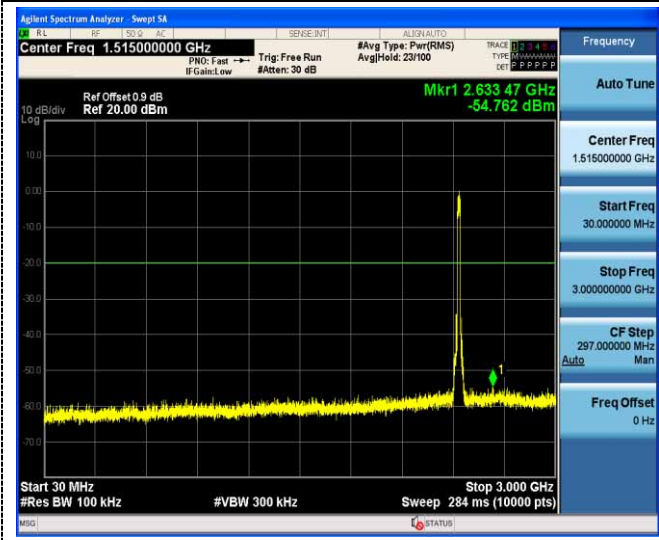

### 30MHz-3GHz

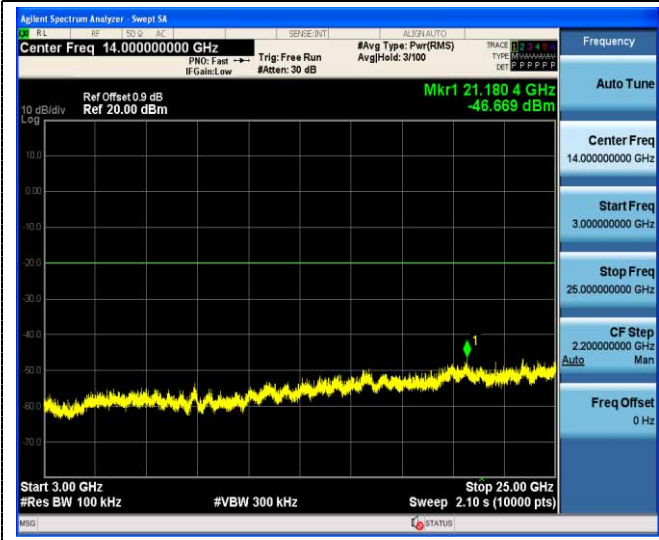



### 30MHz-3GHz

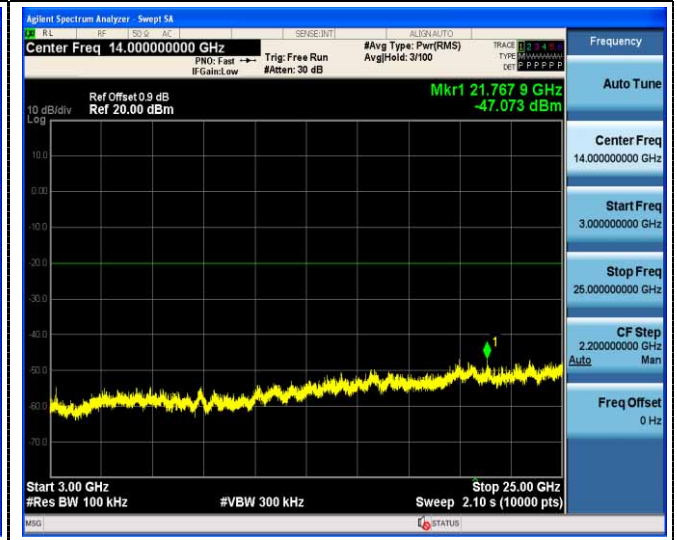


### 3GHz-25GHz

### 3GHz-25GHz

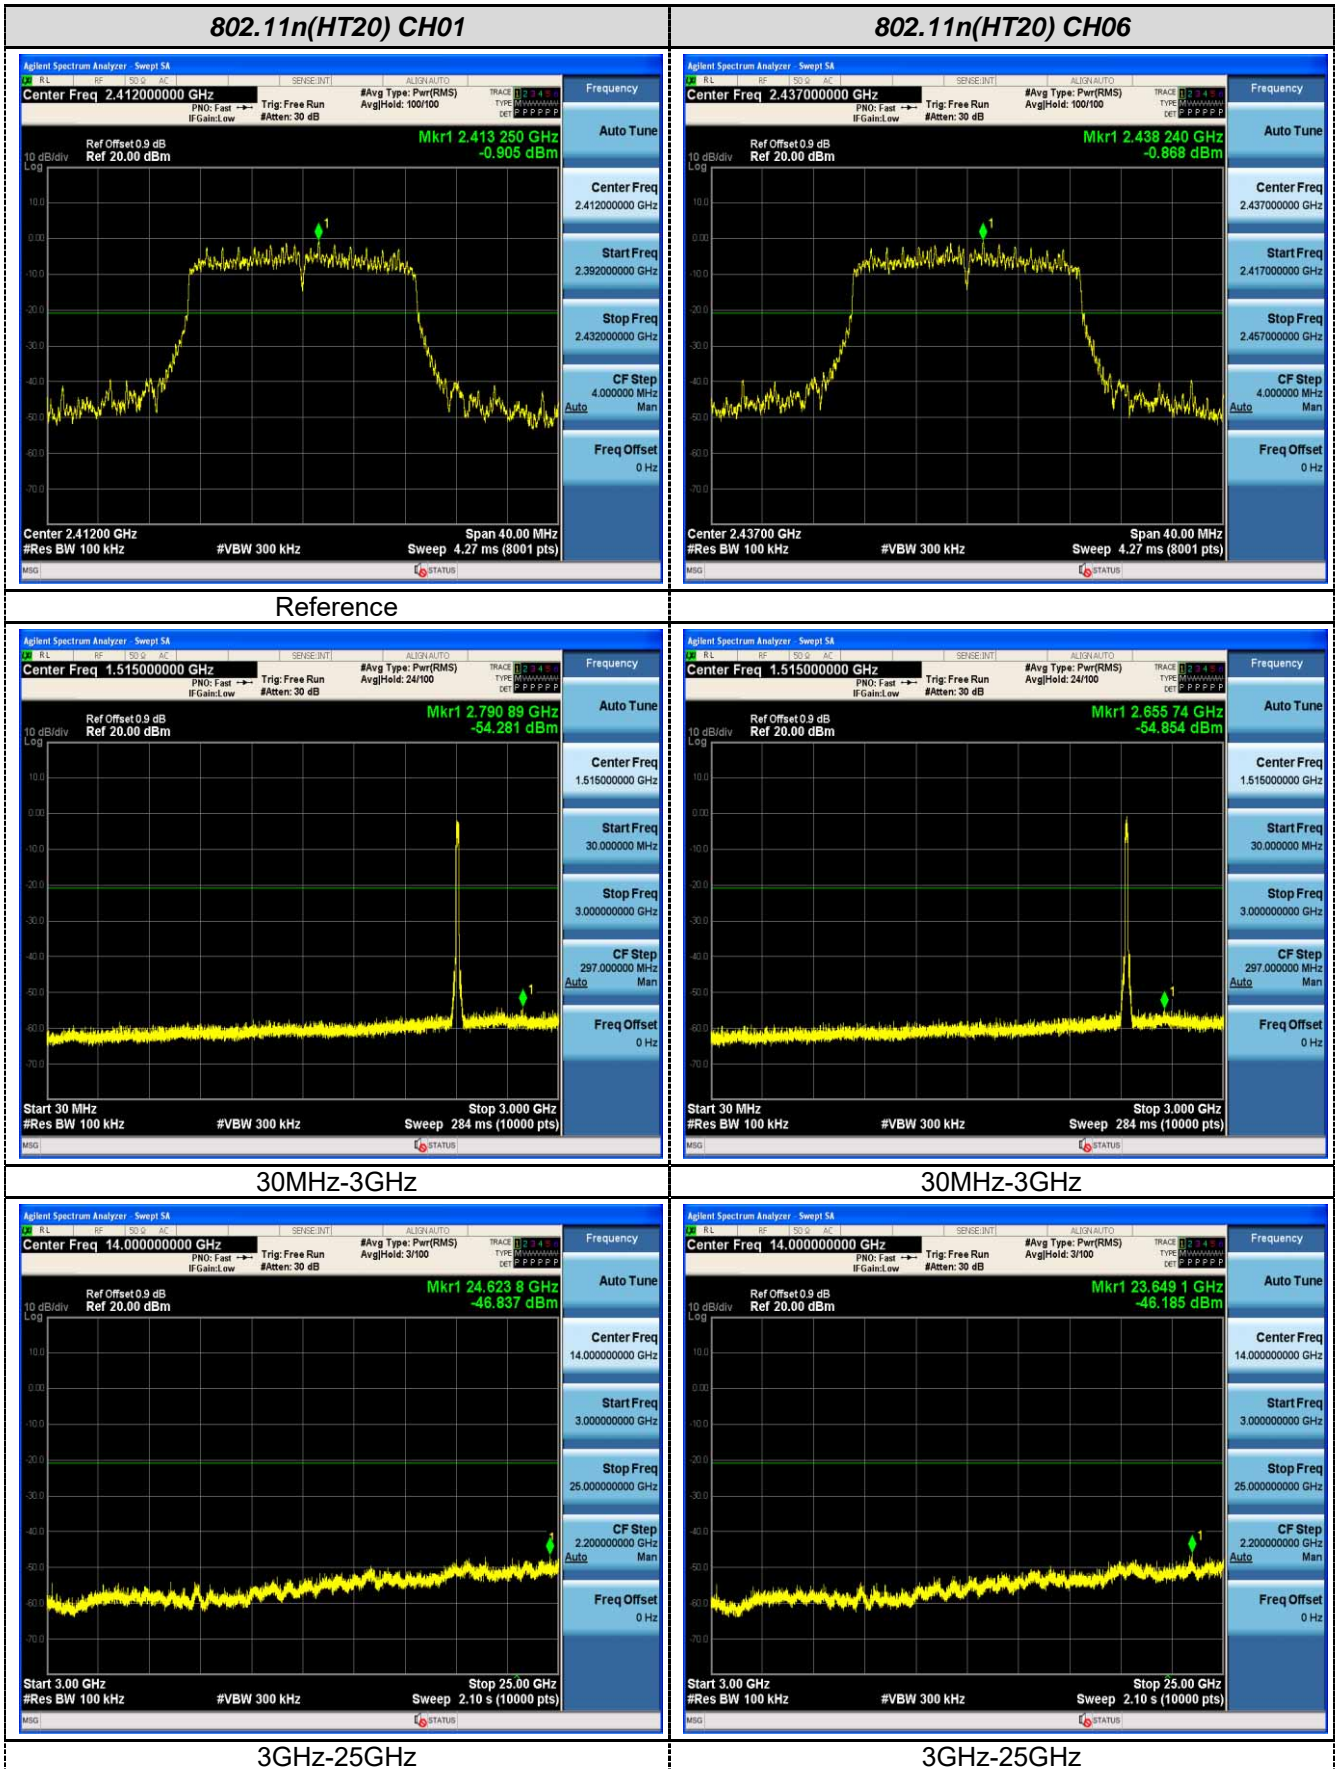


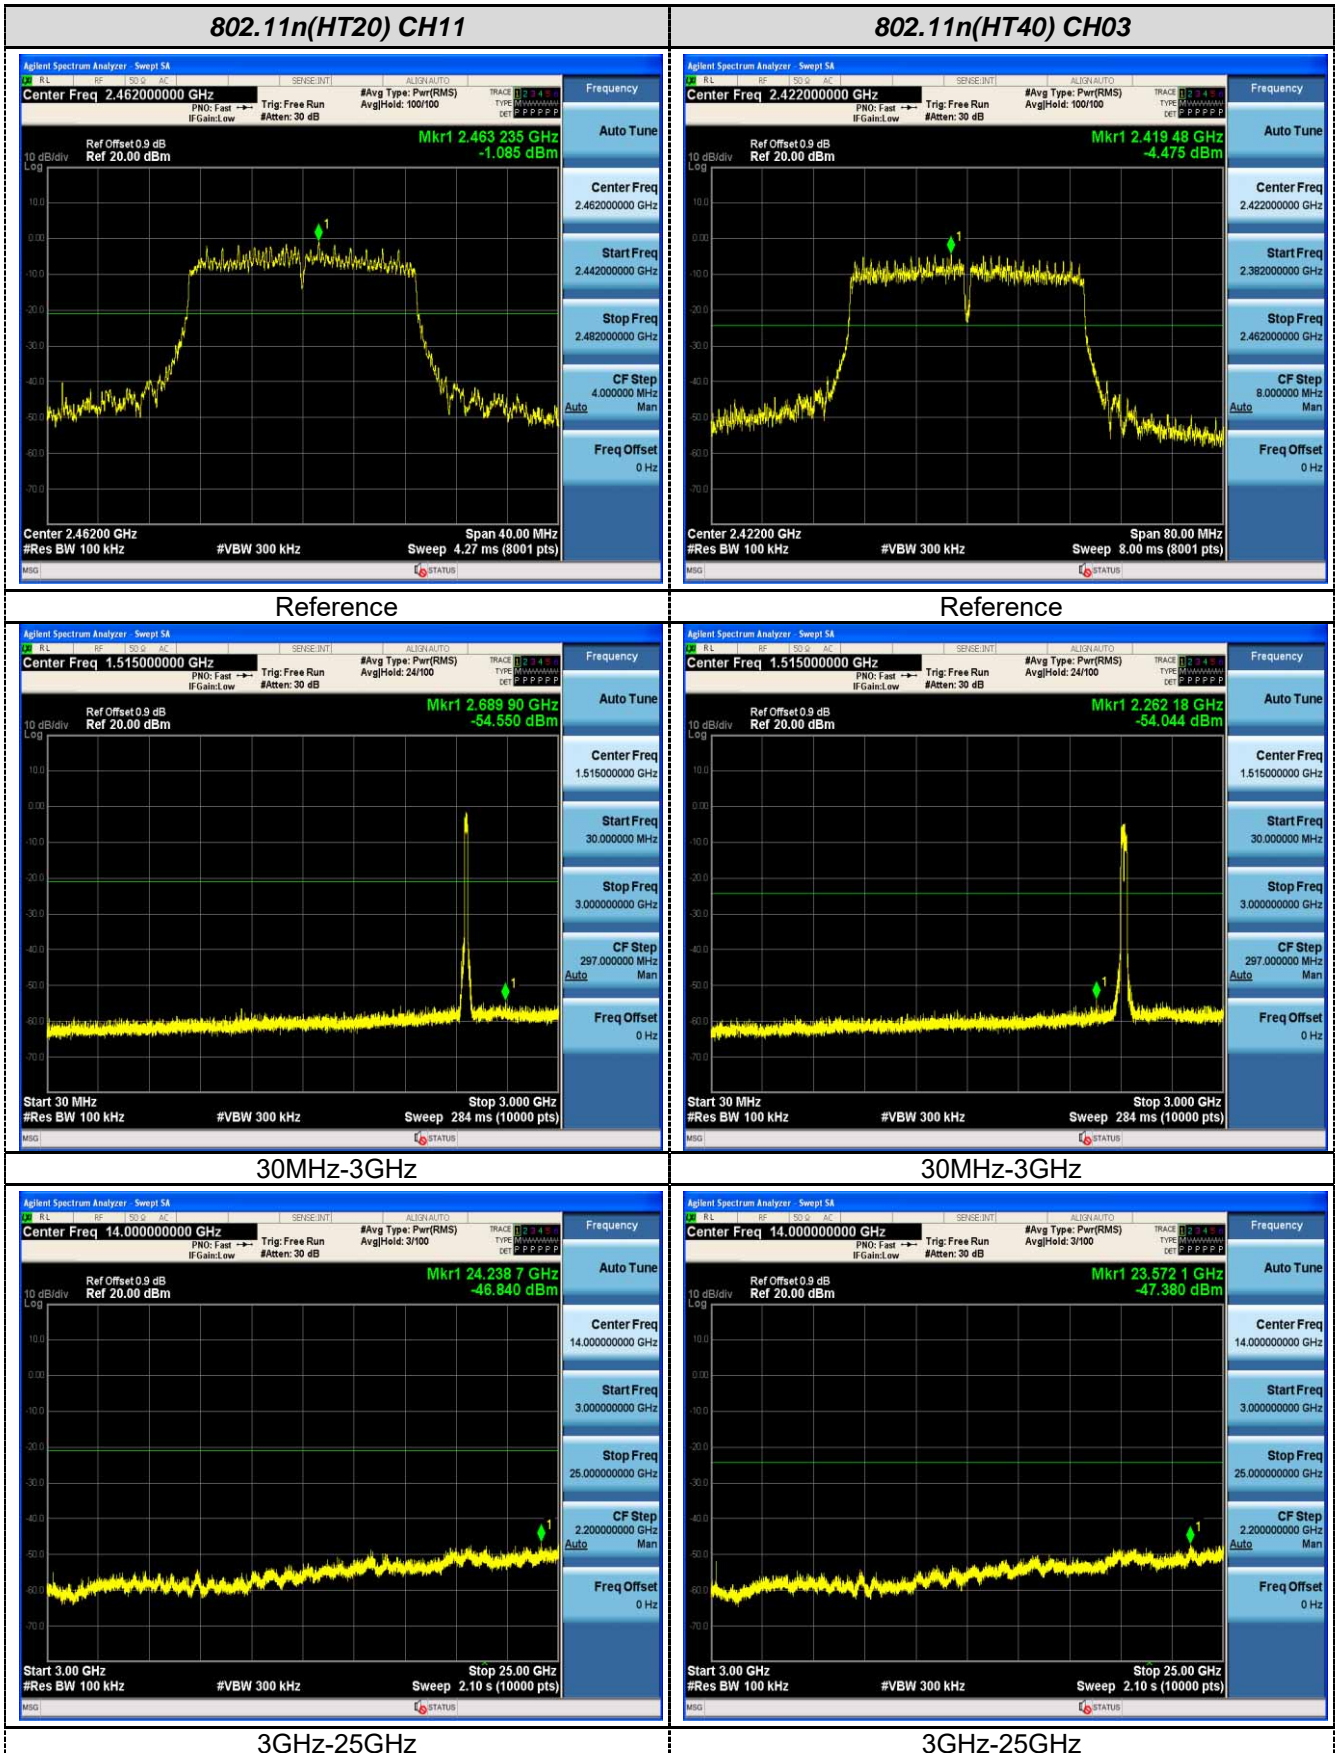

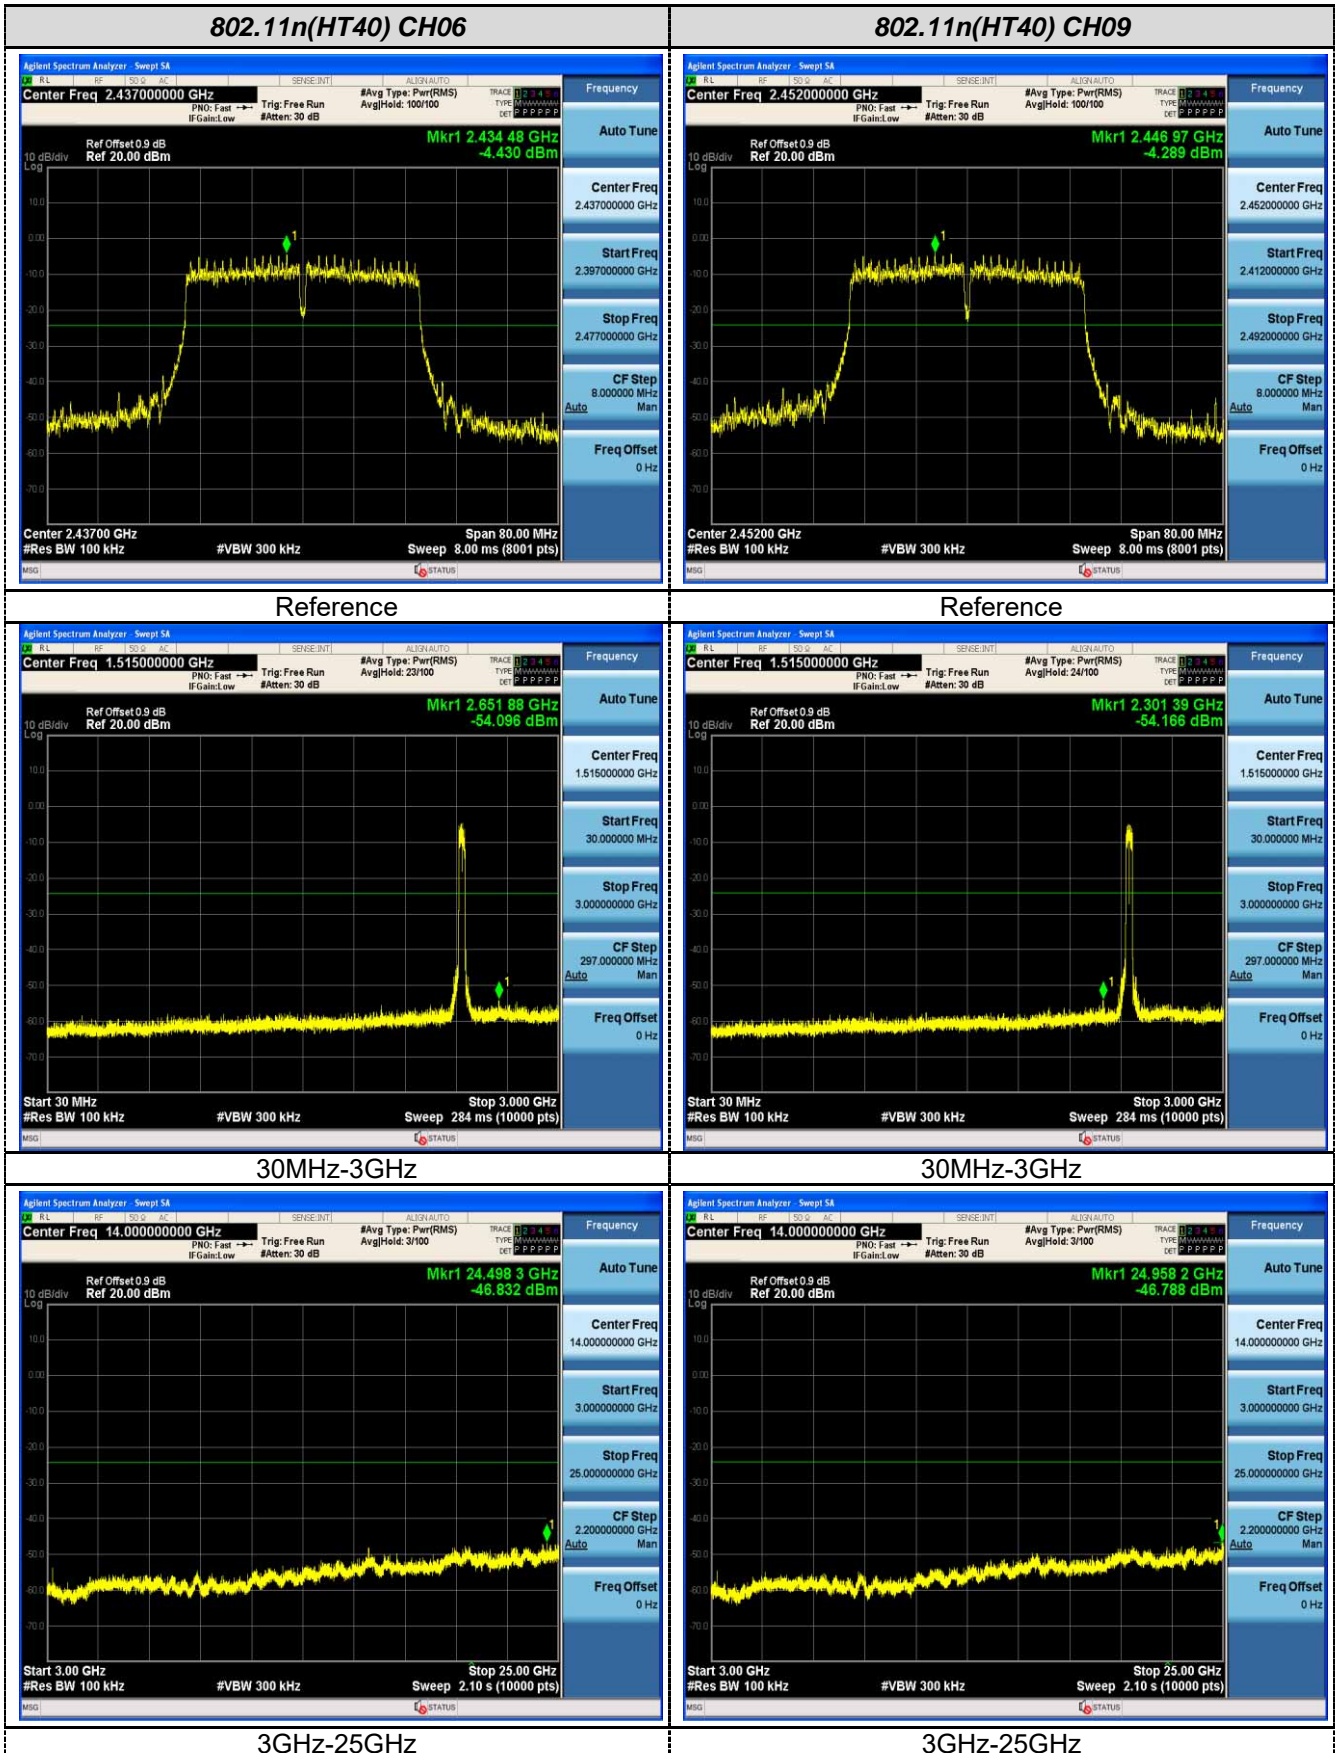


**Band-edge Measurements for RF Conducted Emissions at antenna 1:**

**802.11b**

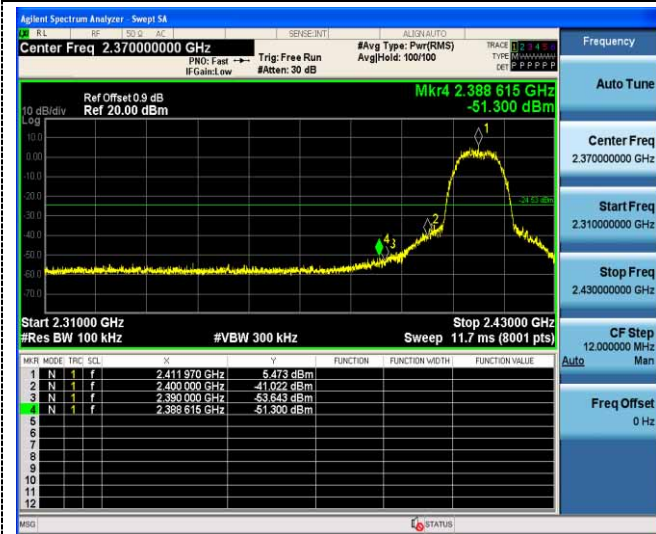

Left bandedge

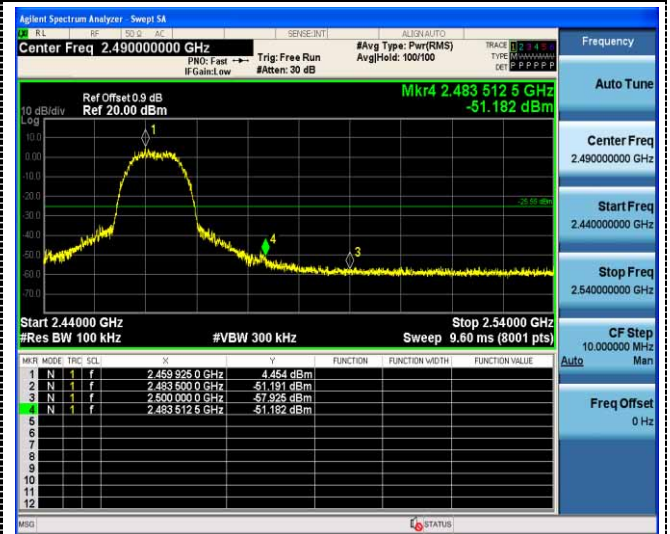


Right bandedge

**802.11g**




Left bandedge

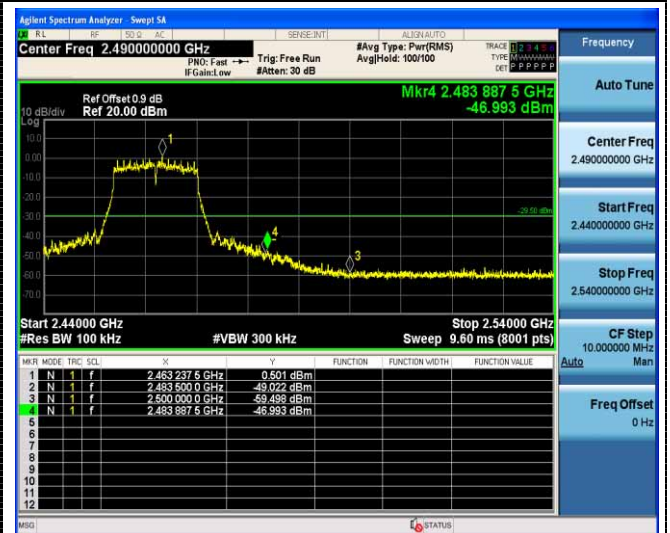


Right bandedge

**802.11n(HT20)**

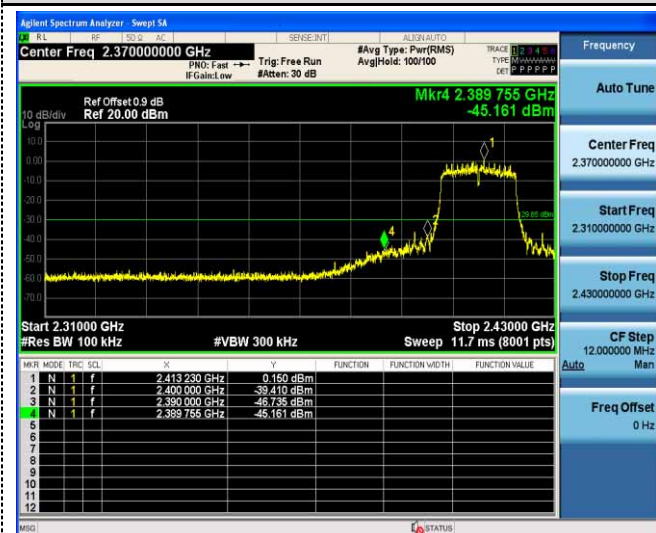

Left bandedge

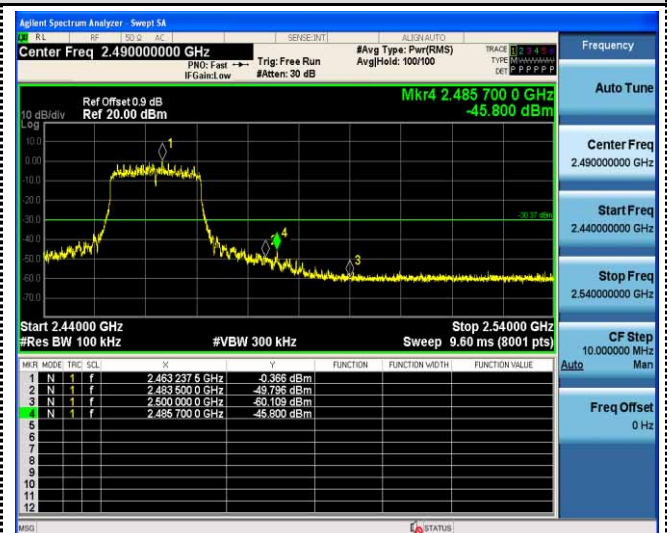


Right bandedge

802.11n(HT40)




Left bandedge

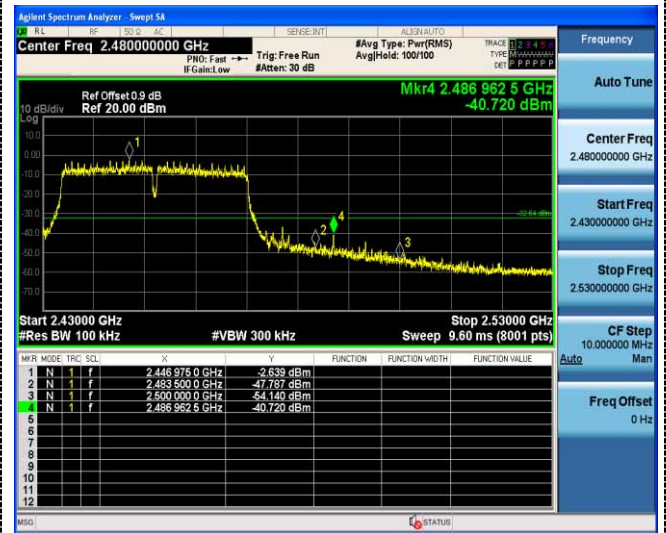


Right bandedge

Band-edge Measurements for RF Conducted Emissions at antenna 2:

802.11b

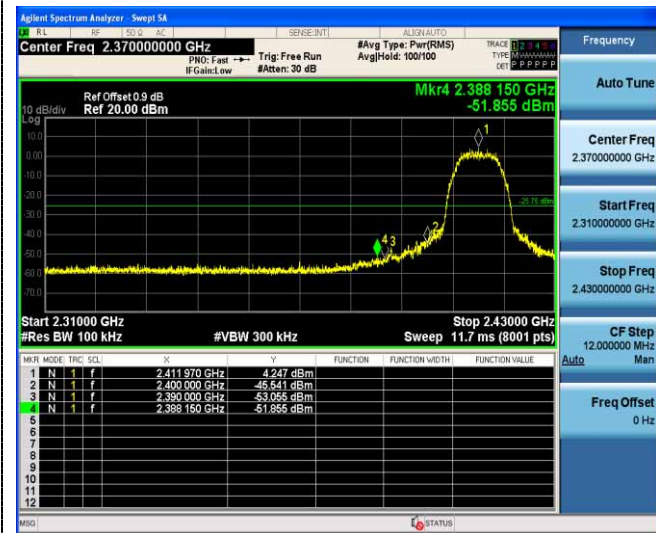


Left bandedge

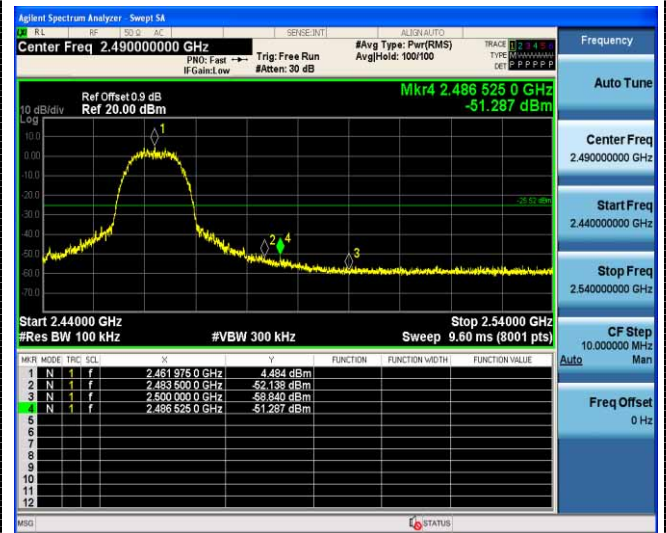


Right bandedge

802.11g

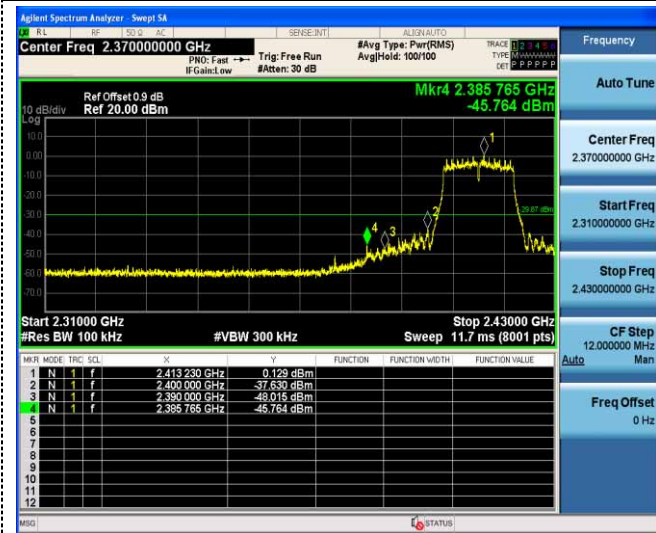

Left bandedge

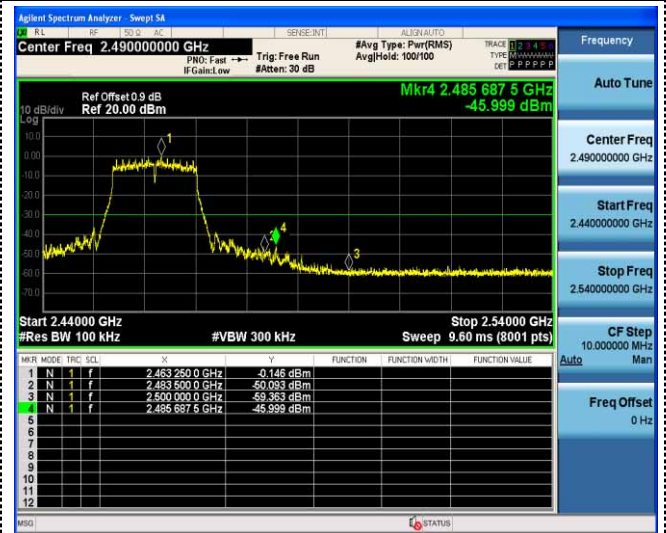


Right bandedge



802.11n(HT20)




Left bandedge

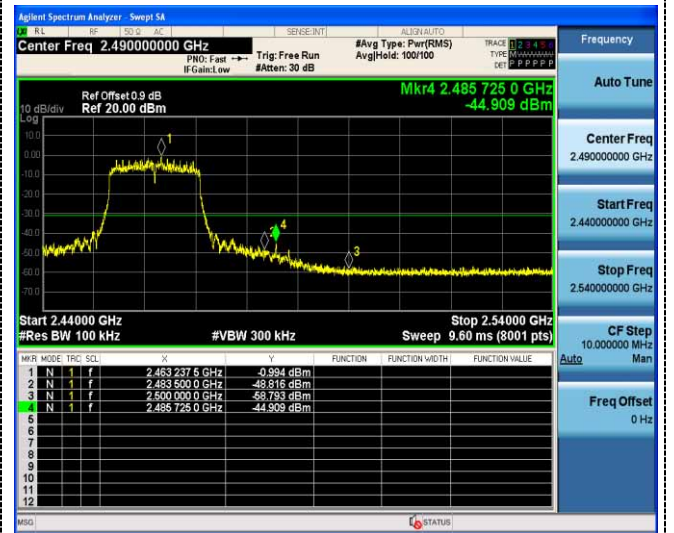


Right bandedge

802.11n(HT40)

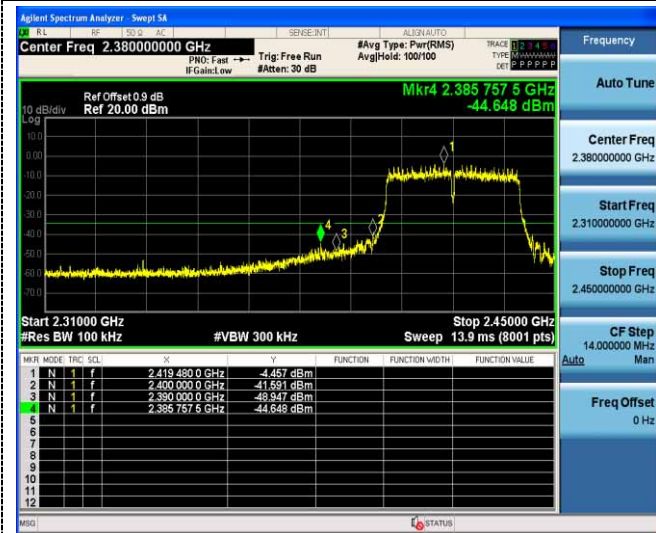

Left bandedge

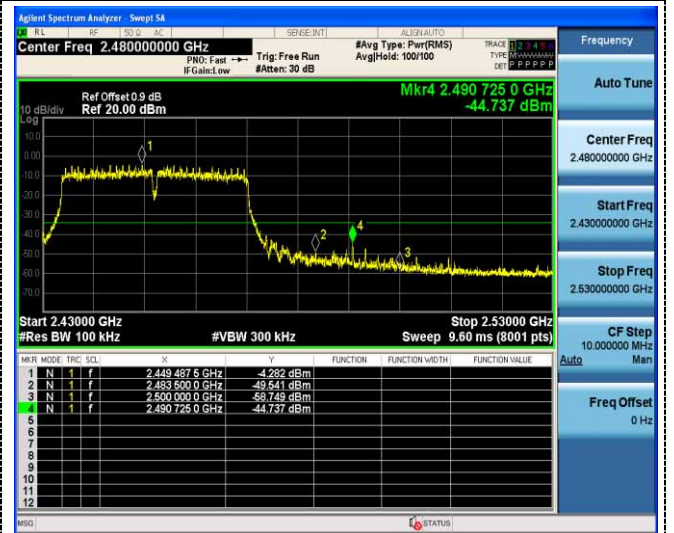

Right bandedge

## 4.7 Antenna Requirement

### Standard Applicable

**For intentional device, according to FCC 47 CFR Section 15.203:**

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited

**FCC CFR Title 47 Part 15 Subpart C Section 15.247(c) (1) (I):**

(i) Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.

### Test Result:

The maximum gain of antenna was 2dBi for 2.4GHz WIFI.

## 5 Test Setup Photos of the EUT



## 6 Photos of the EUT




### External photos















Internal Photos

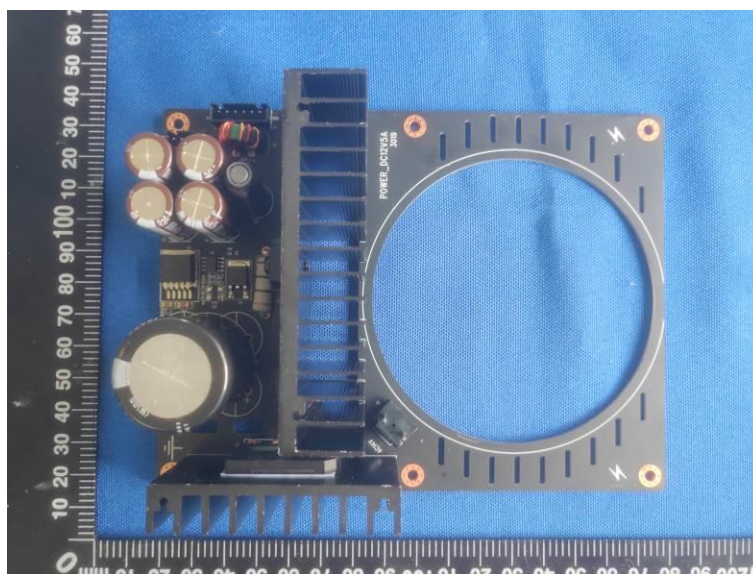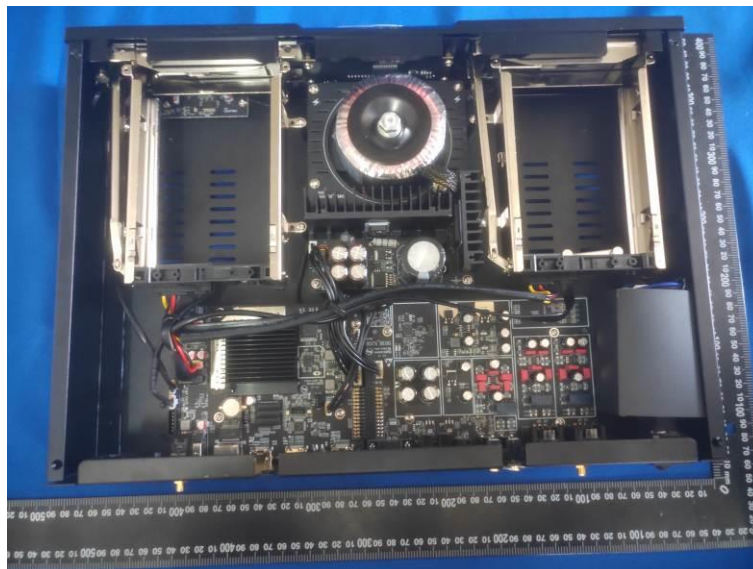
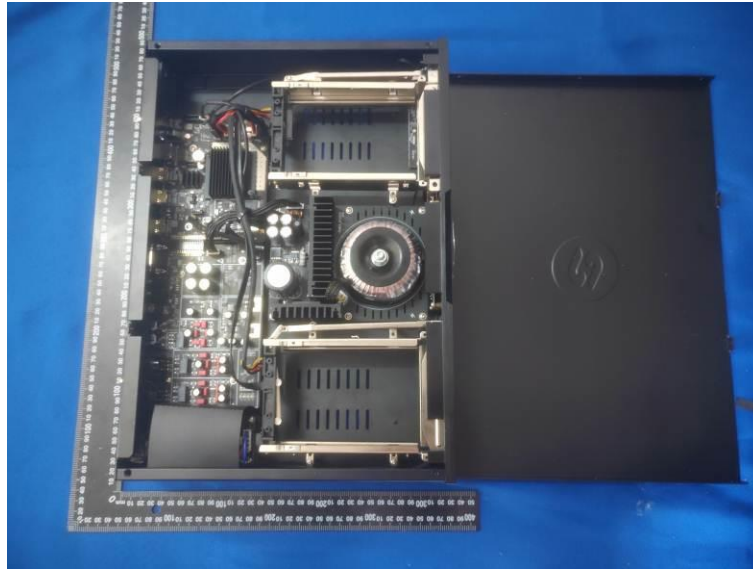


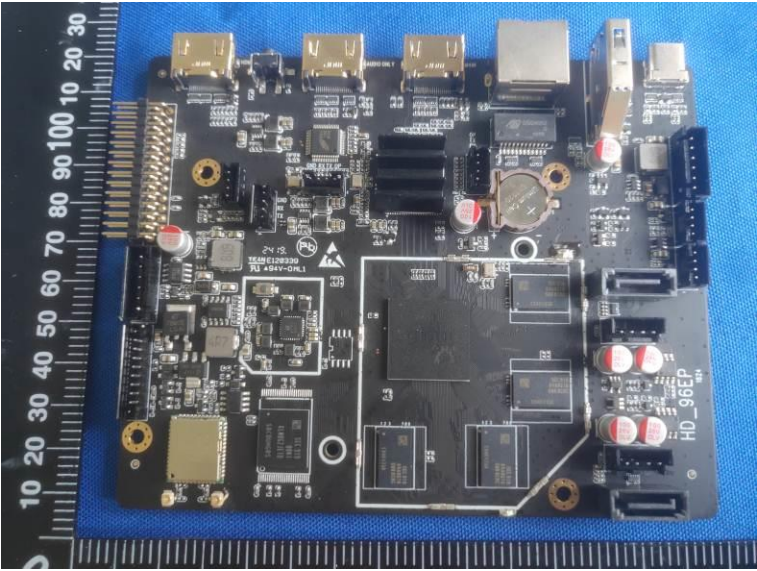
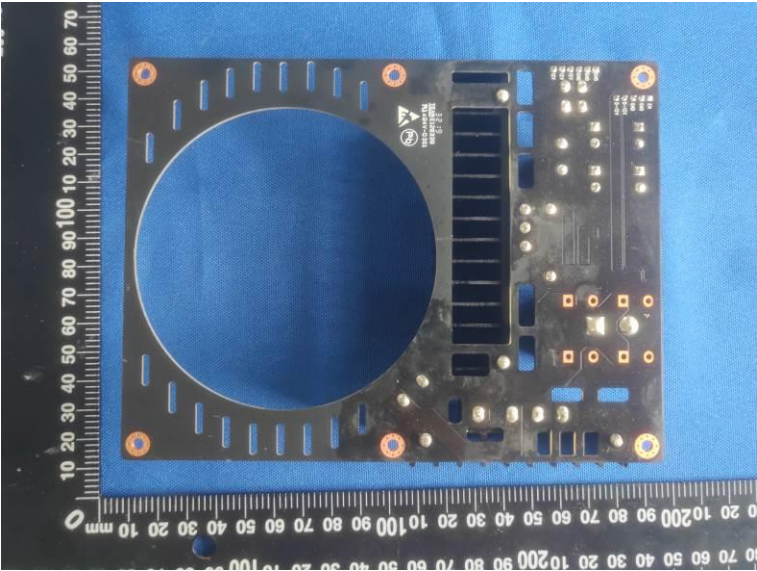




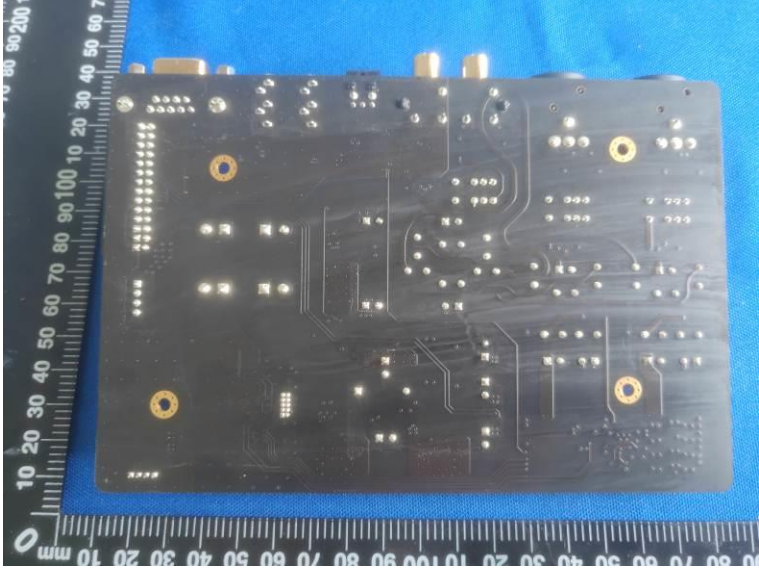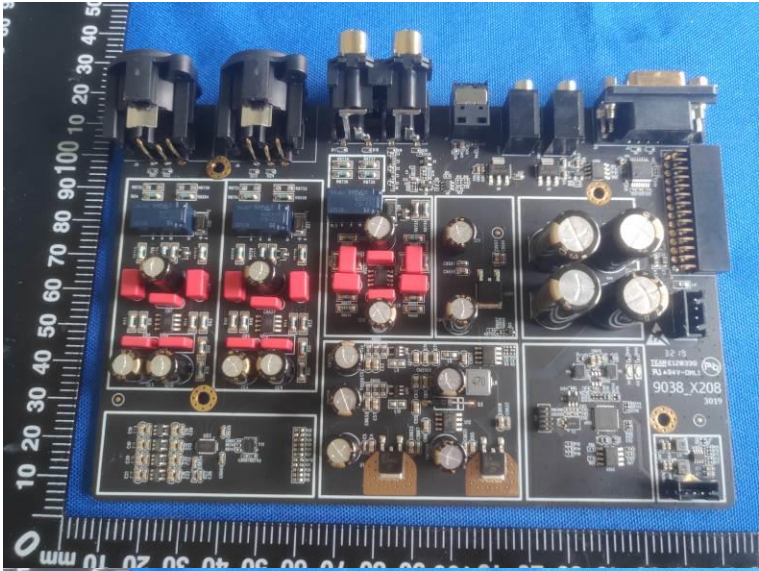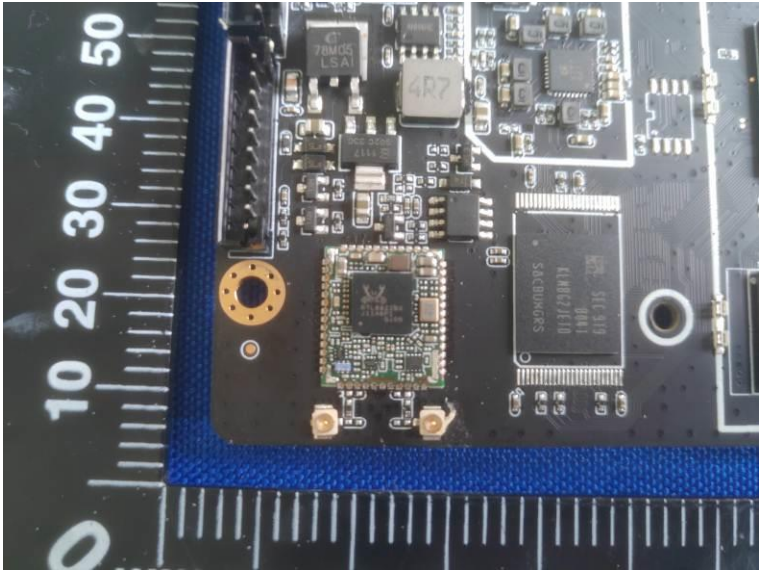

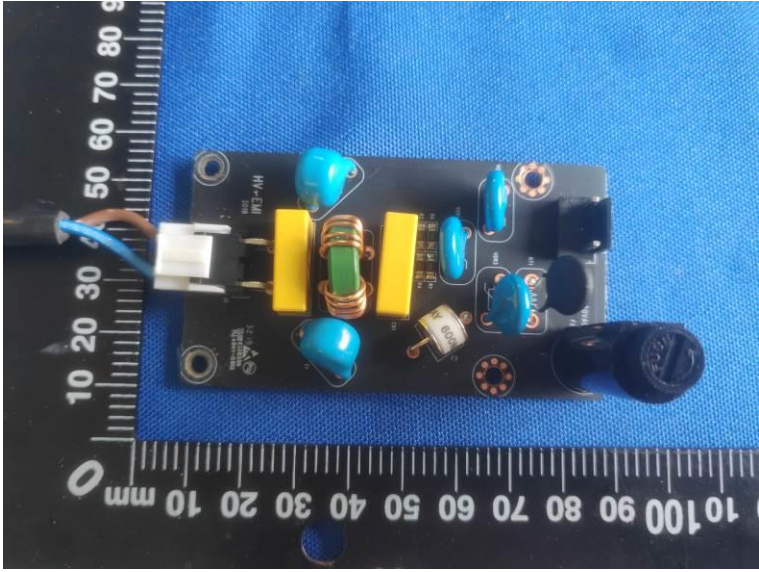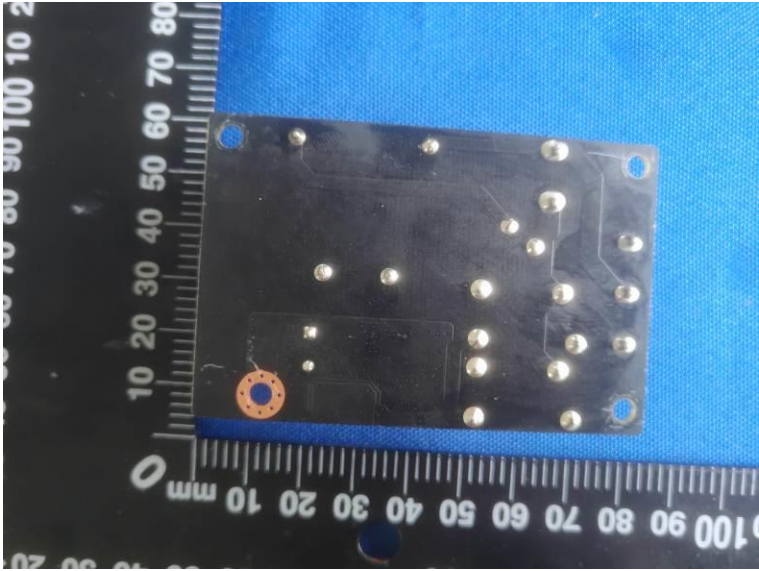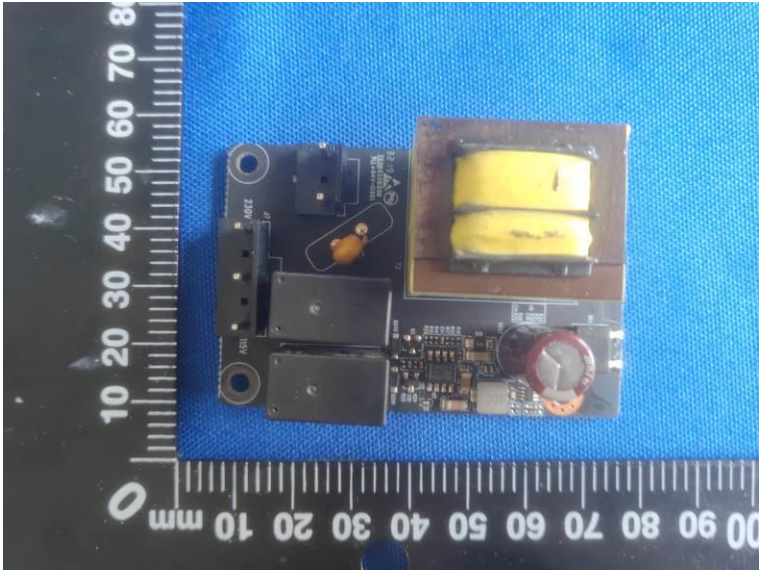

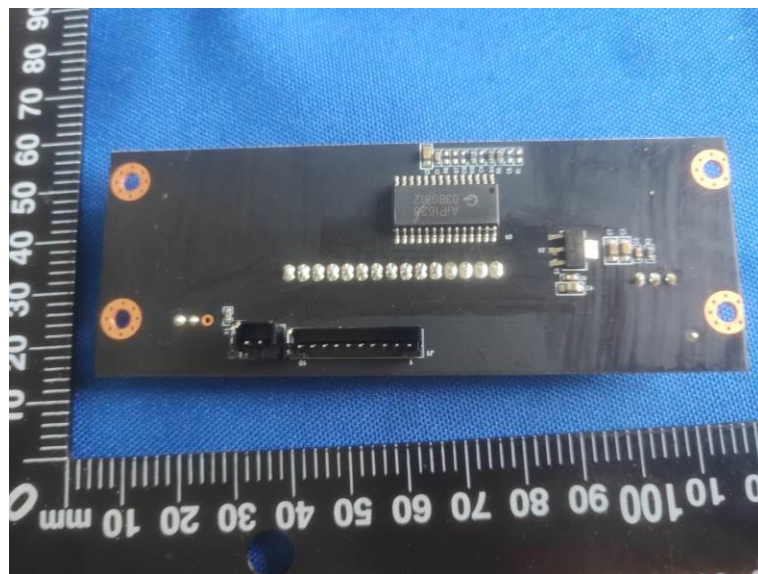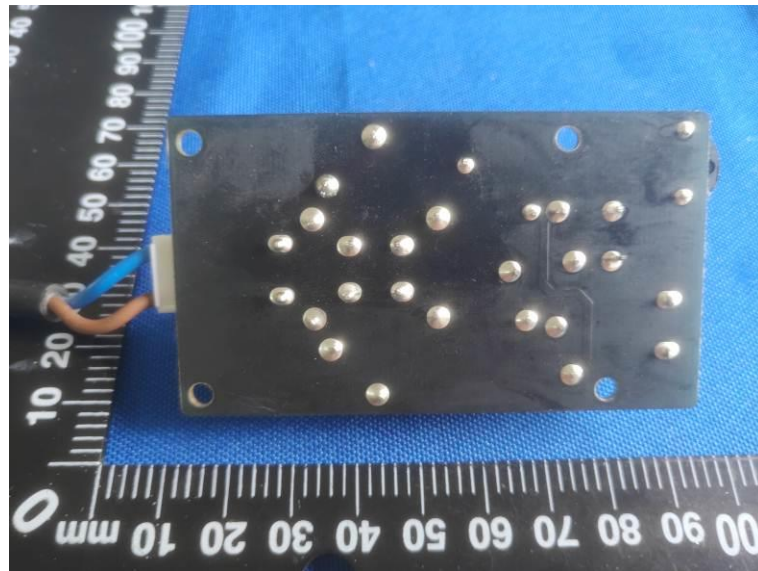

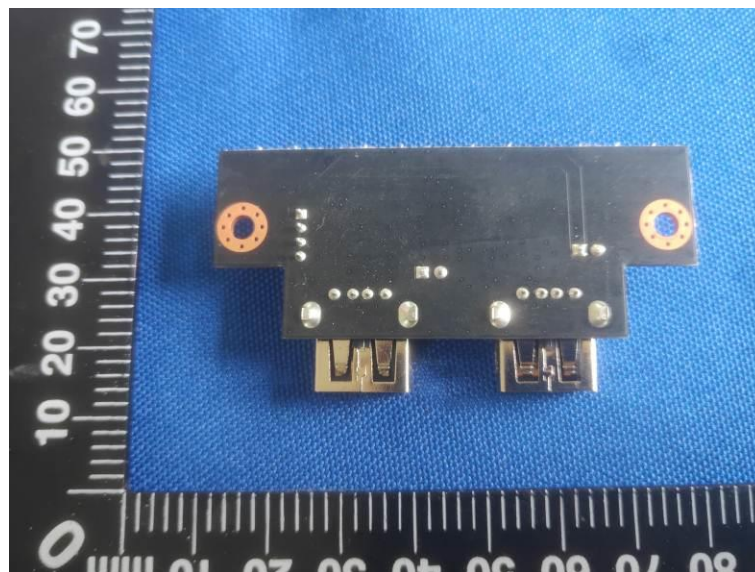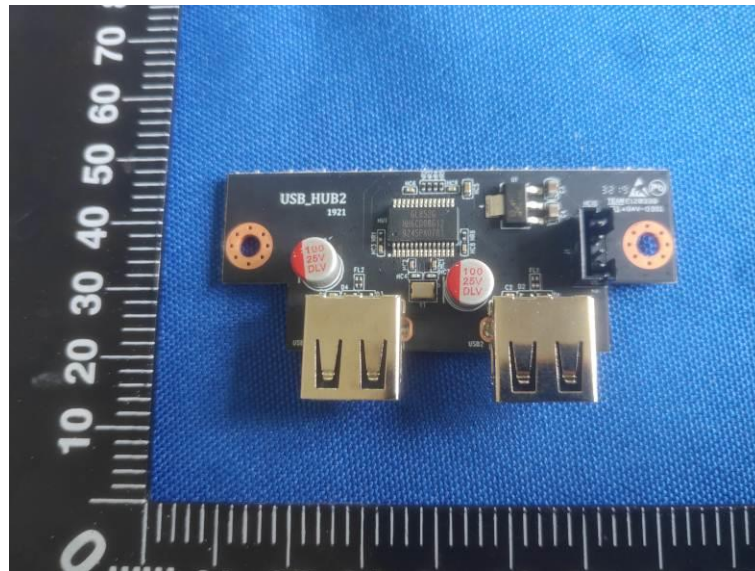

\*\*\*\*\* End of Report \*\*\*\*\*