

FCC 47 CFR PART 15 SUBPART C
Canada RSS-247 Issue2
Canada RSS-Gen Issue4
TEST REPORT

For

Product Name: Sengled Snap Gen2

Brand Name: sengled

Model No.: AS02-PAR38NAE26

Series Model.:N/A

FCC ID: 2AGN8-AS02PAR38

IC: 20888-AS02PAR38

Test Report Number:

C170913R02-RPW

Issued for

Sengled Co., Ltd.

Room 201/15,Building 1, No.498, Guoshoujing Road, Pilot Free Trade Zone,Shanghai,China

Issued by

Compliance Certification Services Inc.

Kun shan Laboratory

**No.10 Weiye Rd., Innovation park, Eco&Tec,
Development Zone, Kunshan City, Jiangsu, China**

TEL: 86-512-57355888

FAX: 86-512-57370818



TESTING CERT #2541.01

Note: This report shall not be reproduced except in full, without the written approval of Compliance Certification Services Inc. This document may be altered or revised by Compliance Certification Services Inc. personnel only, and shall be noted in the revision section of the document. The client should not use it to claim product endorsement by A2LA or any government agencies. The test results in the report only apply to the tested sample.

TABLE OF CONTENTS

| | |
|----------------------------------------------------------|-----------|
| 1. TEST RESULT CERTIFICATION..... | 4 |
| 2. EUT DESCRIPTION..... | 5 |
| 3. TEST METHODOLOGY | 6 |
| 3.1. EUT CONFIGURATION | 6 |
| 3.2. EUT EXERCISE | 6 |
| 3.3. GENERAL TEST PROCEDURES..... | 6 |
| 3.4. FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS..... | 7 |
| 3.5. DESCRIPTION OF TEST MODES..... | 8 |
| 3.6. ANTENNA DESCRIPTION | 9 |
| 4. INSTRUMENT CALIBRATION..... | 10 |
| 4.1. MEASURING INSTRUMENT CALIBRATION | 10 |
| 5. FACILITIES AND ACCREDITATIONS | 12 |
| 5.1. FACILITIES | 12 |
| 5.2. EQUIPMENT..... | 12 |
| 5.3. LABORATORY ACCREDITATIONS AND LISTING | 12 |
| 5.4. TABLE OF ACCREDITATIONS AND LISTINGS | 13 |
| 6. SETUP OF EQUIPMENT UNDER TEST..... | 14 |
| 6.1. SETUP CONFIGURATION OF EUT..... | 14 |
| 6.2. SUPPORT EQUIPMENT..... | 14 |
| 7. FCC PART 15.247 REQUIREMENTS..... | 15 |
| 7.1. 6DB BANDWIDTH | 15 |
| 7.2. 99% BANDWIDTH MEASUREMENT..... | 29 |
| 7.3. PEAK POWER..... | 44 |
| 7.4. PEAK POWER SPECTRAL DENSITY | 46 |
| 7.5. SPURIOUS EMISSIONS | 60 |
| 7.6. RADIATED EMISSIONS..... | 105 |
| 7.7. POWERLINE CONDUCTED EMISSIONS | 123 |

Revision History

| Rev. | Issue Date | Report NO. | Effect Page | Contents |
|------|--------------------|----------------|-------------|----------|
| 00 | September 27, 2017 | C170913R02-RPW | ALL | N/A |

1. TEST RESULT CERTIFICATION

| | |
|-------------------------------|--------------------------------------------------------------------------------------------------------------------|
| Product Name: | Sengled Snap Gen2 |
| Trade Name: | sengled |
| Model Name.: | AS02-PAR38NAE26 |
| Series Model: | N/A |
| Applicant Discrepancy: | Initial |
| Device Category: | Mobile Device |
| Date of Test: | September 18~22, 2017 |
| Applicant: | Sengled Co., Ltd. Room 201/15,Building 1, No.498, Guoshoujing Road, Pilot Free Trade Zone,Shanghai,China |
| Manufacturer: | Sengled Co., Ltd. Room 201/15,Building 1, No.498, Guoshoujing Road, Pilot Free Trade Zone,Shanghai,China |
| Application Type: | Certification |

| APPLICABLE STANDARDS | |
|------------------------------|-------------------------|
| STANDARD | TEST RESULT |
| FCC 47 CFR Part 15 Subpart C | No non-compliance noted |
| Canada RSS-247 Issue2 | No non-compliance noted |
| Canada RSS-Gen Issue4 | No non-compliance noted |



We hereby certify that:

The above equipment was tested by Compliance Certification Services Inc. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10: 2013 and the energy emitted by the sample EUT tested as described in this report is in compliance with the requirements of FCC Rules Part 15.207, 15.209, 15.247.

The test results of this report relate only to the tested sample EUT identified in this report.

Approved by:

Tested by:

Jeff.Fang
RF Manager
Compliance Certification Service Inc.

James.Yan
Test Engineer
Compliance Certification Service Inc.

2. EUT DESCRIPTION

| | |
|--------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Product Name: | Sengled Snap Gen2 |
| Brand Name: | sengled |
| Model Name: | AS02-PAR38NAE26 |
| Series Model: | N/A |
| Model Discrepancy: | N/A |
| Power Supply: | Input:100-120VAC,50/60Hz |
| Frequency Range: | IEEE 802.11b/g: 2412MHz to 2462 MHz IEEE 802.11n HT20: 2412MHz to 2462 MHz IEEE 802.11n HT40: 2422MHz to 2452 MHz |
| Average Transmit Power: | IEEE 802.11b mode: 20.39dBm IEEE 802.11g mode: 23.41dBm IEEE 802.11n HT20 mode: 25.95dBm IEEE 802.11n HT40 mode:24.08dBm |
| Modulation Technique: | IEEE802.11b mode: DSSS (1,2,5.5 and 11 Mbps) IEEE802.11g mode: DSSS /OFDM (6,9,12,18,24,36,48 and 54 Mbps) IEEE802.11n HT20 mode: OFDM (MCS0-MCS7) IEEE802.11n HT40 mode: OFDM (MCS0-MCS7) |
| Number of Channels: | IEEE 802.11b/g mode: 11 Channels IEEE 802.11n HT20 : 11 Channels IEEE 802.11n HT40 : 7 Channels |
| Antenna Specification: | PCB Antenna 1 Gain: 6.63 dBi PCB Antenna 2 Gain: 4.83 dBi Directional Gain: 8.83 dBi * |

Note: Antenna Directional Gain (dBi) = $10 * \text{LOG}(10^{(\text{Antenna 1 Gain} / 10)} + 10^{(\text{Antenna 2 Gain} / 10)})$

Remark:

- 1.The sample selected for test was engineering sample that approximated to production product and was provided by manufacturer.
- 2.This submittal(s) (test report) is intended for **FCC ID:2AGN8-AS02PAR38** filing to comply with Section 15.207, 15.209 and 15.247 of the FCC Part 15, Subpart C Rules.
- 3.This submittal(s) (test report) is intended for **IC:20888-AS02PAR38** filing to comply with Canada RSS-247 Issue 2 and Canada RSS-Gen Issue 4 Rules.

3. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.10 2013 and FCC CFR 47 15.207, 15.209 and 15.247.

3.1. EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

3.2. EUT EXERCISE

The EUT was operated in the engineering mode to fix the TX frequency that was for the purpose of the measurements.

According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209 and 15.247 under the FCC Rules Part 15 Subpart C.

3.3. GENERAL TEST PROCEDURES

Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 13.1.4.1 of ANSI C63.10 2013 Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-peak and average detector modes.

Radiated Emissions

Under 1GHz

The EUT is placed on a turn table, which is 0.8 m above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna, which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the maximum emissions, exploratory radiated emission measurements were made according to the requirements in Section 13.1.4.1 of ANSI C63.10:2013.

Above 1GHz

The EUT is placed on a turn table, which is 1.5 m above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna, which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the maximum emissions, exploratory radiated emission measurements were made according to the requirements in Section 13.1.4.1 of ANSI C63.10:2013.

3.4. FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS

Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

| MHz | MHz | MHz | GHz |
|----------------------------|-----------------------|-----------------|------------------|
| 0.090 - 0.110 | 16.42 - 16.423 | 399.9 - 410 | 4.5 - 5.15 |
| ¹ 0.495 - 0.505 | 16.69475 - 16.69525 | 608 - 614 | 5.35 - 5.46 |
| 2.1735 - 2.1905 | 16.80425 - 16.80475 | 960 - 1240 | 7.25 - 7.75 |
| 4.125 - 4.128 | 25.5 - 25.67 | 1300 - 1427 | 8.025 - 8.5 |
| 4.17725 - 4.17775 | 37.5 - 38.25 | 1435 - 1626.5 | 9.0 - 9.2 |
| 4.20725 - 4.20775 | 73 - 74.6 | 1645.5 - 1646.5 | 9.3 - 9.5 |
| 6.215 - 6.218 | 74.8 - 75.2 | 1660 - 1710 | 10.6 - 12.7 |
| 6.26775 - 6.26825 | 108 - 121.94 | 1718.8 - 1722.2 | 13.25 - 13.4 |
| 6.31175 - 6.31225 | 123 - 138 | 2200 - 2300 | 14.47 - 14.5 |
| 8.291 - 8.294 | 149.9 - 150.05 | 2310 - 2390 | 15.35 - 16.2 |
| 8.362 - 8.366 | 156.52475 - 156.52525 | 2483.5 - 2500 | 17.7 - 21.4 |
| 8.37625 - 8.38675 | 156.7 - 156.9 | 2655 - 2900 | 22.01 - 23.12 |
| 8.41425 - 8.41475 | 162.0125 - 167.17 | 3260 - 3267 | 23.6 - 24.0 |
| 12.29 - 12.293 | 167.72 - 173.2 | 3332 - 3339 | 31.2 - 31.8 |
| 12.51975 - 12.52025 | 240 - 285 | 3345.8 - 3358 | 36.43 - 36.5 |
| 12.57675 - 12.57725 | 322 - 335.4 | 3600 - 4400 | (²) |
| 13.36 - 13.41 | | | |

¹ Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

² Above 38.6

Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

3.5. DESCRIPTION OF TEST MODES

| Test Mode | Ant 1 | Ant 2 | Ant 1+2 |
|--------------|-------|-------|---------|
| 802.11b | ✓ | ✓ | x |
| 802.11g | ✓ | ✓ | x |
| 802.11n HT20 | ✓ | ✓ | ✓ |
| 802.11n HT40 | ✓ | ✓ | ✓ |

The worst-case data rates:

IEEE802.11b mode:

Channel Low (2412MHz)

Channel Mid (2437MHz)

Channel High (2462MHz) with 1Mbps data rate was chosen for full testing.

IEEE802.11g mode:

Channel Low (2412MHz)

Channel Mid (2437MHz)

Channel High (2462MHz) with 6Mbps data rate was chosen for full testing.

IEEE 802.11n HT20 MHz Channel mode:

Channel Low (2412MHz)

Channel Mid (2437MHz)

Channel High (2462MHz) with MCS0 data rate was chosen for full testing.

IEEE 802.11n HT40 MHz Channel mode:

Channel Low (2422MHz)


Channel Mid (2437MHz)

Channel High (2452MHz) with MCS0 data rate was chosen for full testing.

3.6. ANTENNA DESCRIPTION

an intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached or an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section”

- * the antenna of this EUT is a unique(PCB Antenna for WiFi).
- * the EUT complies with the requirement of 15.203.

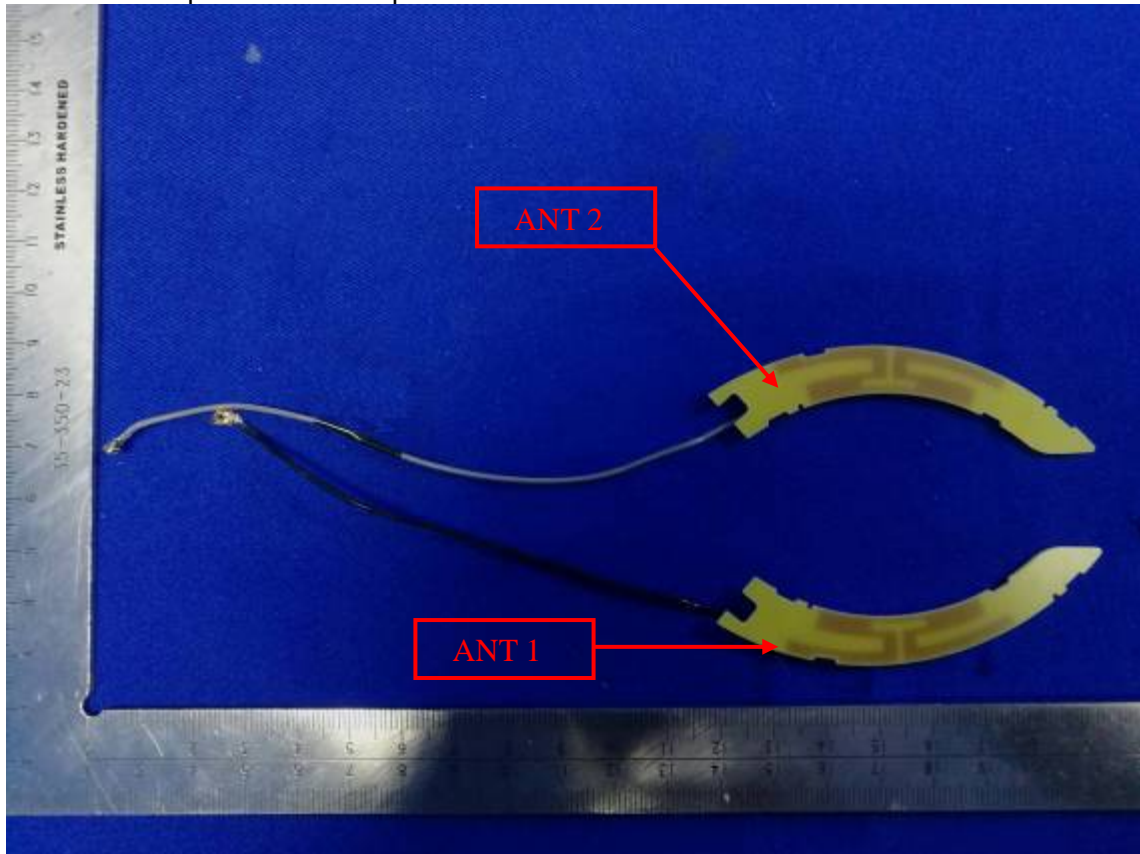

4. INSTRUMENT CALIBRATION

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

Equipment Used for Emissions Measurement

| Conducted Emissions Test Site | | | | | |
|-------------------------------|---------------|----------|---------------|------------------|-----------------|
| Name of Equipment | Manufacturer | Model | Serial Number | Calibration Date | Calibration Due |
| Spectrum Analyzer | RS | FSU26 | 200789 | 2017-7-20 | 2018-7-19 |
| Power meter | Anritsu | ML2495A | 1445010 | 2017-4-26 | 2018-4-25 |
| Power sensor | Anritsu | MA2411B | 1339220 | 2017-4-26 | 2018-4-25 |
| Power SPLITTER | Mini-Circuits | ZN2PD-9G | SF078500430 | N.C.R | N.C.R |
| DC Power Supply | AGILENT | E3632A | MY50340053 | N.C.R | N.C.R |
| Temp. / Humidity Gauge | Anymetre | TH603 | CCS007 | 2016-11-1 | 2017-10-31 |
| Test Software | | | EZ-EMC | | |

| 977 Chamber | | | | | |
|--------------------------|--------------|----------------------|---------------|------------------|-----------------|
| Name of Equipment | Manufacturer | Model | Serial Number | Calibration Date | Calibration Due |
| Spectrum Analyzer | RS | FSU26 | 200789 | 2017-7-20 | 2018-7-19 |
| EMI Test Receiver | R&S | ESCI | 101378 | 2017-1-5 | 2018-1-4 |
| Pre-Amplifier | MITEQ | AMF-6F-260400-40-8P | 1037496 | 2016-11-15 | 2017-11-14 |
| Amplifier | MITEQ | JS41-00101800-32-10P | 1675713 | 2017-7-20 | 2018-7-19 |
| Broad-Band Horn Antenna | SCHWARZBECK | BBHA 9170 | 9170-515 | 2017-3-6 | 2018-3-5 |
| TRILOG BROADBAND ANTENNA | SCHWARZBECK | VULB9160 | 9160-3342 | 2017-5-27 | 2018-5-26 |
| Loop Antenna | Hengweiyi | 39501C | 2014012 | 2017-1-5 | 2018-1-4 |
| Horn-antenna | SCHWARZBECK | 9120D | D:266 | 2017-3-5 | 2018-3-4 |
| Horn-antenna | SCHWARZBECK | 9120D | D:267 | 2016-11-10 | 2017-11-9 |
| Turn Table | CT | CT123 | 4165 | N.C.R | N.C.R |
| Antenna Tower | CT | CTERG23 | 3256 | N.C.R | N.C.R |
| Controller | CT | CT100 | 95637 | N.C.R | N.C.R |
| Test Software | | | EZ-EMC | | |

| Conducted Emission | | | | | |
|--------------------|--------------|-----------|---------------|------------------|-----------------|
| Name of Equipment | Manufacturer | Model | Serial Number | Calibration Date | Calibration Due |
| EMI TEST RECEIVER | R&S | ESCI | 100781 | 2017-2-28 | 2018-2-27 |
| V (V-LISN) | SCHWARZBECK | NNLK 8129 | 8129-143 | 2016-11-1 | 2017-10-31 |
| TWO-LINE V-NETWORK | R&S | ENV216 | 101604 | 2016-11-1 | 2017-10-31 |
| Pulse LIMITER | R&S | ESH3-Z2 | 100524 | 2017-1-5 | 2018-1-4 |
| Test Software | | | EZ-EMC | | |

Remark: The measurement uncertainty is less than +/- 2.81dB, which is evaluated as per the NAMAS NIS 81 and CISPR/A/291/CDV.

Expanded Uncertainty (95% CONFIDENCE INTERVAL): K=2

5. FACILITIES AND ACCREDITATIONS

5.1. FACILITIES

All measurement facilities used to collect the measurement data are located at CCS China Kunshan Lab at 10#Weiye Rd, Innovation Park Eco. & Tec. Development Zone Kunshan city JiangSu, (215300), CHINA.

The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.10 2013 and CISPR Publication 22.

5.2. EQUIPMENT

Radiated emissions are measured with one or more of the following types of linearly polarized antennas: tuned dipole, biconical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements.

Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers.

Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."




5.3. LABORATORY ACCREDITATIONS AND LISTING

FCC –Designation Number: CN1172.

Compliance Certification Services Inc. Kun shan Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files and the Designation Number: CN1172.

Also the test facilities are listed with Industry Canada, Laboratory Division, 2324E-1 for 10m chamber, 2324E-2 for 3m chamber.

5.4. TABLE OF ACCREDITATIONS AND LISTINGS

| Country | Agency | Scope of Accreditation | Logo |
|---------|--------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
| USA | A2LA | 47 CFR FCC Part 15/18 (using ANSI C63.10 :2013); VCCI V3; CNS 13438; CNS 13439; CNS 13803; CISPR 11; EN 55011; CISPR 13; EN 55013; CISPR 22:2005; CISPR 22:1997 +A1 :2000+A2 :2002; EN 55022:2006; EN55022 :1998 +A1 :2001+A2 :2003; EN 61000-6-3 (excluding discontinuous interference); EN 61000-6-4; AS/NZS CISPR 22; CAN/CSA-CEI/IEC CISPR 22; EN 61000-3-2; EN 61000-3-3; EN550024; EN 61000-4-2; EN 61000-4-3; EN61000-4-4; EN 61000-4-5; EN 61000-4-6; IEC 61000-4-8; EN 61000-4-11; IEC61000-3-2; IEC61000-3-3; IEC 61000-4-2; IEC 61000-4-3; IEC 61000-4-4; IEC 61000-4-5; IEC 61000-4-6; IEC 61000-4-8; IEC 61000-4-11; EN 300 220-3; EN 300 328; EN 300 330-2; EN 300 440-1; EN 300-440-2; EN 300 893; EN 301 489-01; EN 301 489-3; EN 301 489-07; EN 301 489-17; 47 CFR FCC Part 15, 22, 24 |  |
| USA | FCC | 3/10 meter Sites to perform FCC Part 15/18 measurements |  |
| Japan | VCCI | 3/10 meter Sites and conducted test sites to perform radiated/conducted measurements |  |

** No part of this report may be used to claim or imply product endorsement by A2LA or any agency of the US Government.*

6. SETUP OF EQUIPMENT UNDER TEST

6.1. SETUP CONFIGURATION OF EUT

See test photographs attached in Appendix 1 for the actual connections between EUT and support equipment.

6.2. SUPPORT EQUIPMENT

| No. | Device Type | Brand | Model | Series No. | FCC ID |
|-----|-------------------|-------|----------------|------------|--------|
| 1. | Notebook computer | DELL | Latitude E5430 | N/A | N/A |

Remark:

2. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
3. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.


7. FCC PART 15.247 REQUIREMENTS

7.1. 6DB BANDWIDTH

LIMIT

According to §15.247(a)(2), systems using digital modulation techniques may operate in the 902 - 928 MHz, and 2400 - 2483.5 MHz bands, and 5725 - 5850 MHz bands. The minimum 6dB bandwidth shall be at least 500kHz.

Test Configuration



TEST PROCEDURE

Set the spectrum analyzer as RBW = 100 kHz, VBW = 300 kHz, Sweep = auto couple.

TEST RESULTS

No non-compliance noted

Test Data

IEEE 802.11b mode /Chain 0

| Channel | Frequency (MHz) | Bandwidth (MHz) | Limit (kHz) | Result |
|---------|-----------------|-----------------|-------------|--------|
| Low | 2412 | 8.109 | >500 | PASS |
| Mid | 2437 | 8.590 | | PASS |
| High | 2462 | 8.590 | | PASS |

IEEE 802.11b mode /Chain 1

| Channel | Frequency (MHz) | Bandwidth (MHz) | Limit (kHz) | Result |
|---------|-----------------|-----------------|-------------|--------|
| Low | 2412 | 9.102 | >500 | PASS |
| Mid | 2437 | 9.038 | | PASS |
| High | 2462 | 9.038 | | PASS |

IEEE 802.11g mode /Chain 0

| Channel | Frequency (MHz) | Bandwidth (MHz) | Limit (kHz) | Result |
|---------|-----------------|-----------------|-------------|--------|
| Low | 2412 | 15.192 | >500 | PASS |
| Mid | 2437 | 15.641 | | PASS |
| High | 2462 | 15.641 | | PASS |

IEEE 802.11g mode /Chain 1

| Channel | Frequency (MHz) | Bandwidth (MHz) | Limit (kHz) | Result |
|---------|-----------------|-----------------|-------------|--------|
| Low | 2412 | 12.692 | >500 | PASS |
| Mid | 2437 | 12.628 | | PASS |
| High | 2462 | 12.692 | | PASS |

IEEE 802.11n HT20 mode / Chain 0

| Channel | Frequency (MHz) | Bandwidth (MHz) | Limit (kHz) | Result |
|---------|-----------------|-----------------|-------------|--------|
| Low | 2412 | 14.167 | >500 | PASS |
| Mid | 2437 | 15.064 | | PASS |
| High | 2462 | 14.167 | | PASS |

IEEE 802.11n HT20 mode / Chain 1

| Channel | Frequency (MHz) | Bandwidth (MHz) | Limit (kHz) | Result |
|---------|-----------------|-----------------|-------------|--------|
| Low | 2412 | 12.628 | >500 | PASS |
| Mid | 2437 | 12.628 | | PASS |
| High | 2462 | 14.167 | | PASS |

IEEE 802.11n HT40 mode / Chain 0

| Channel | Frequency (MHz) | Bandwidth (MHz) | Limit (kHz) | Result |
|---------|-----------------|-----------------|-------------|--------|
| Low | 2422 | 36.250 | >500 | PASS |
| Mid | 2437 | 35.673 | | PASS |
| High | 2452 | 35.962 | | PASS |


IEEE 802.11n HT40 mode / Chain 1

| Channel | Frequency (MHz) | Bandwidth (MHz) | Limit (kHz) | Result |
|---------|-----------------|-----------------|-------------|--------|
| Low | 2422 | 36.346 | >500 | PASS |
| Mid | 2437 | 35.577 | | PASS |
| High | 2452 | 35.865 | | PASS |


Test Plot

IEEE 802.11b MODE /Chain 0


6dB Bandwidth (CH Low)

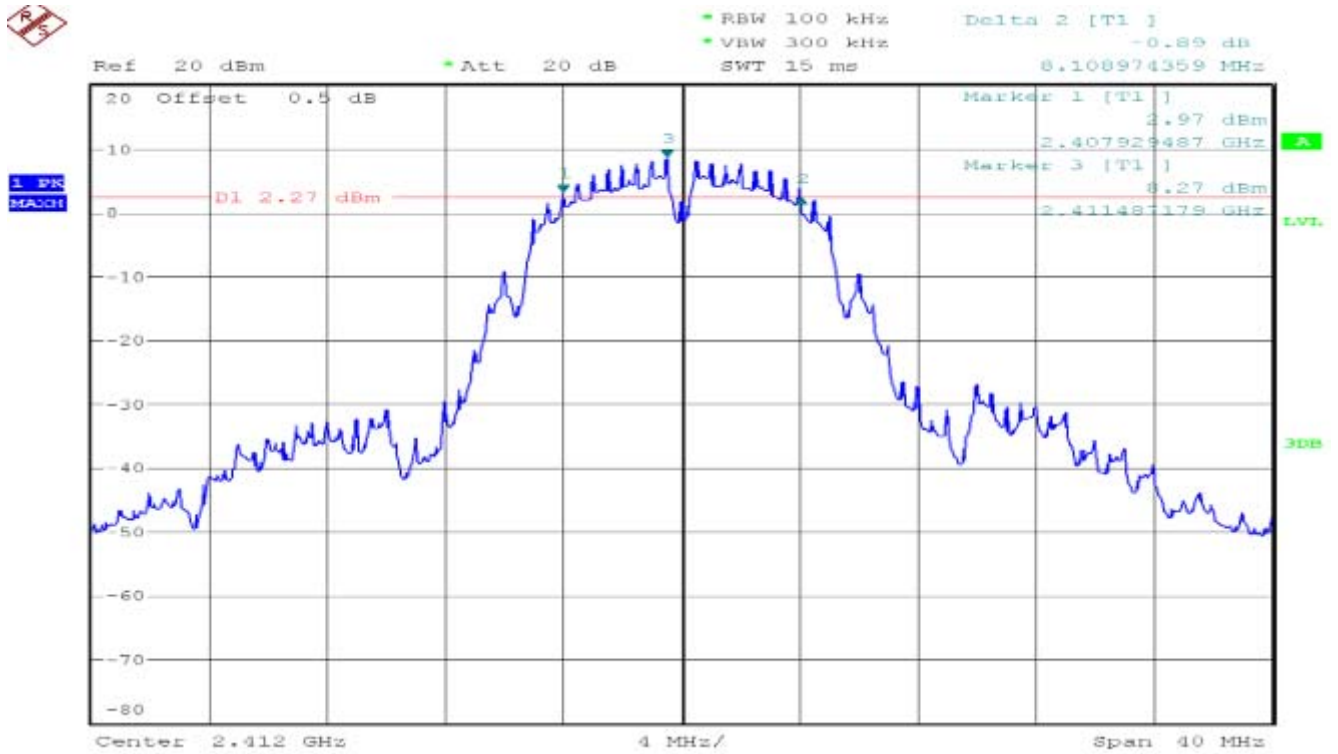

6dB Bandwidth (CH Mid)

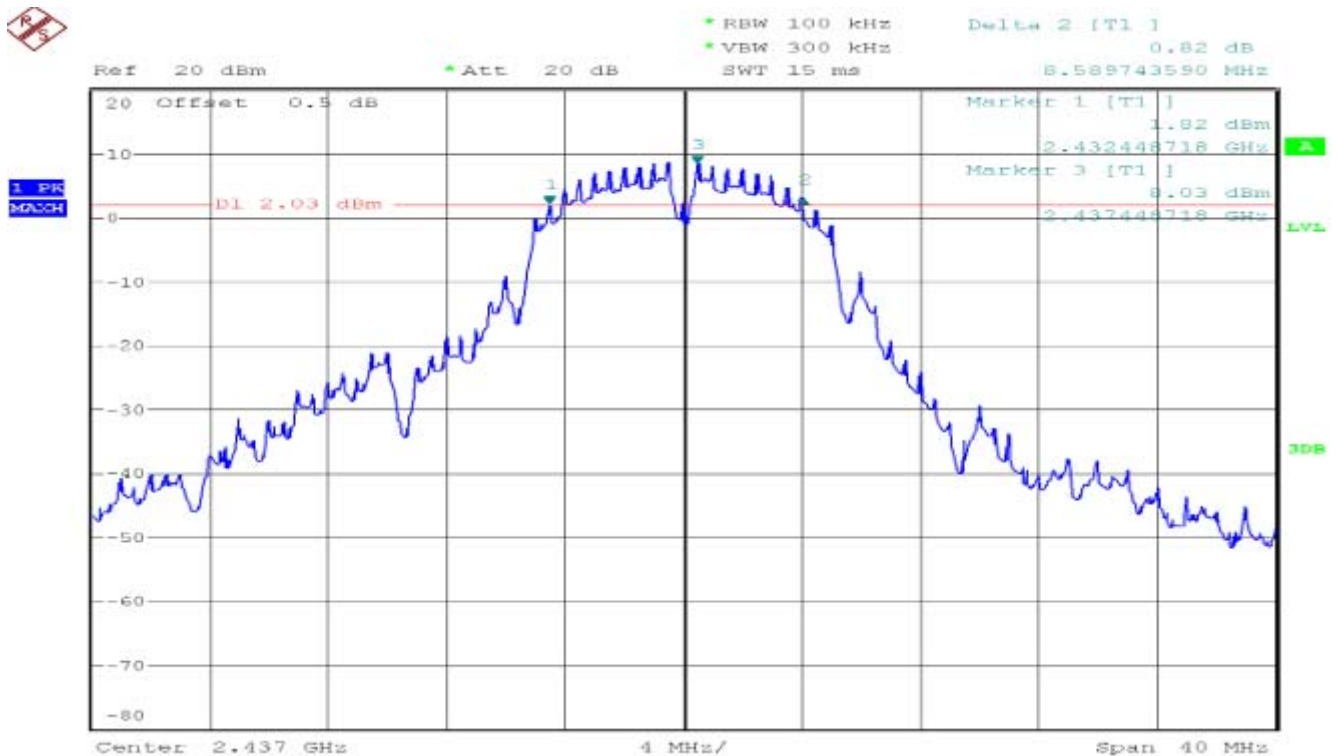


6dB Bandwidth (CH High)

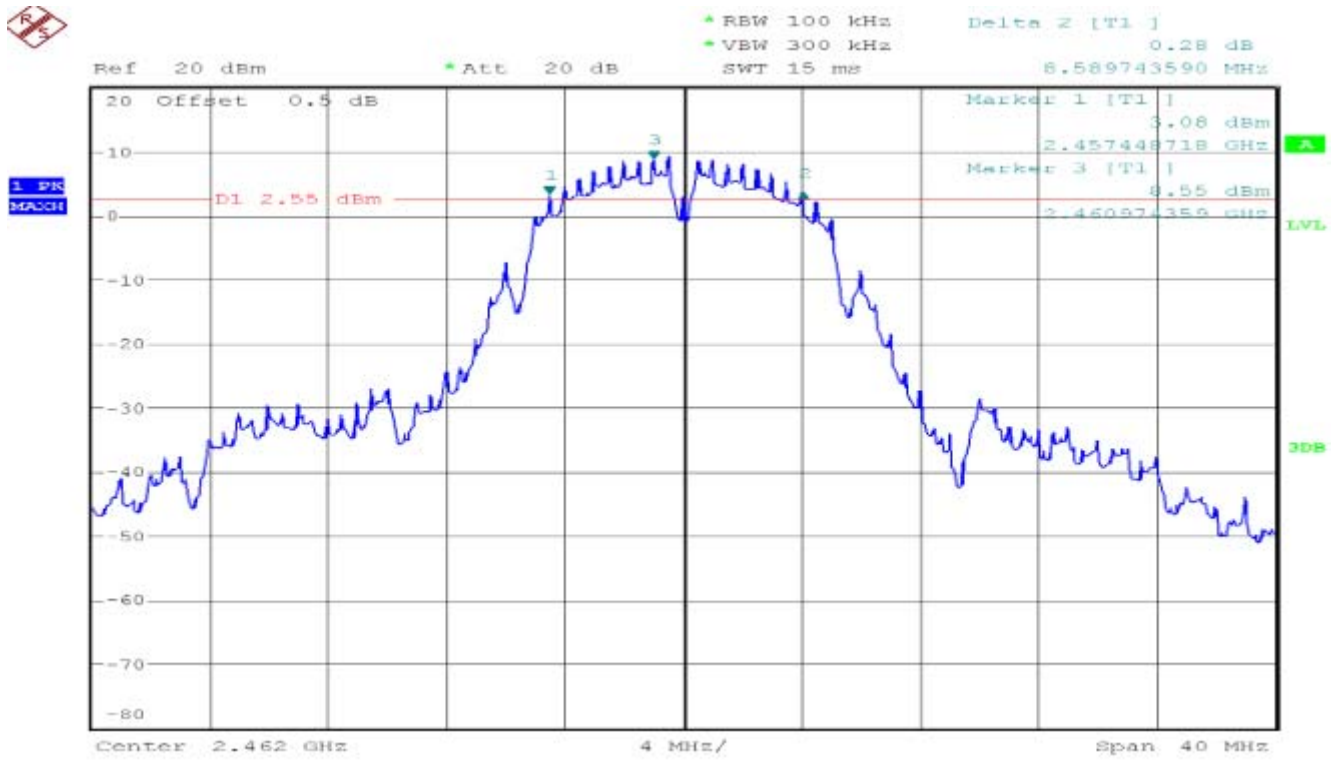


IEEE 802.11b MODE /Chain 1


6dB Bandwidth (CH Low)

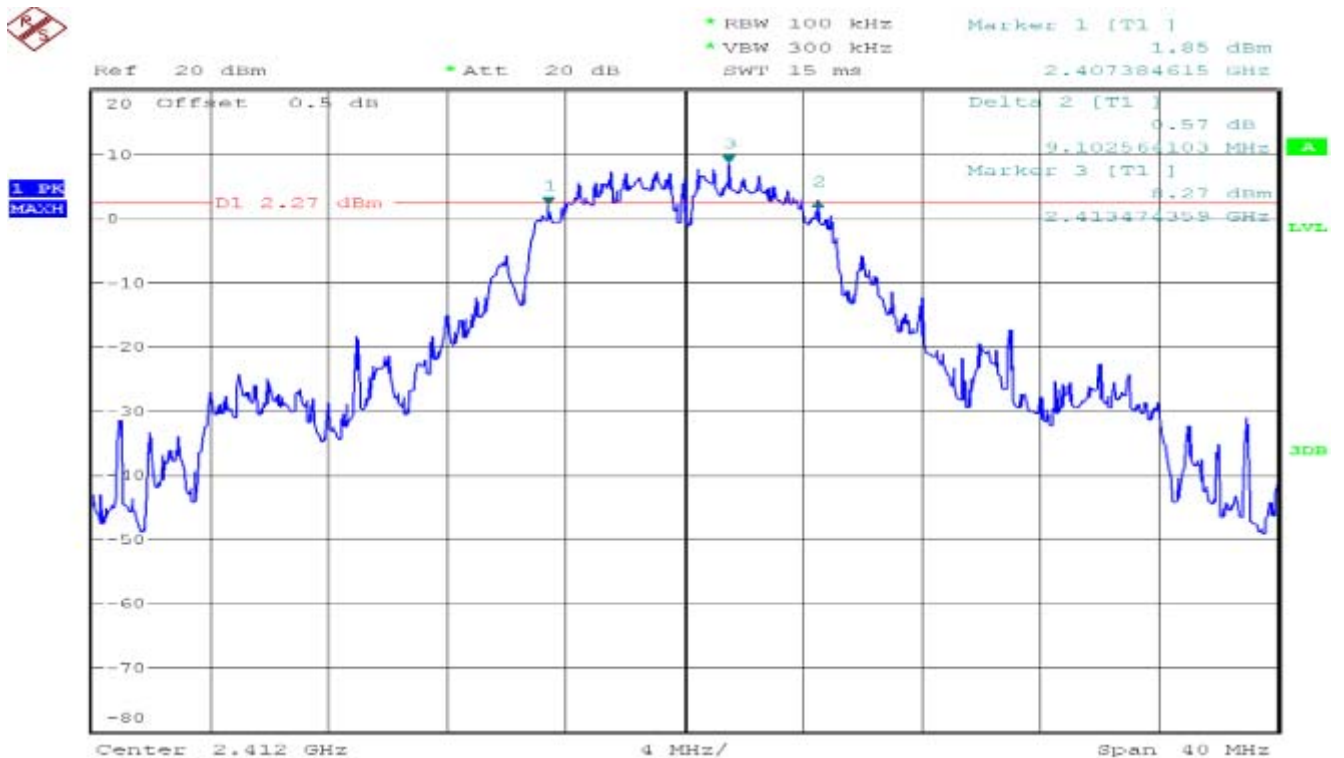

6dB Bandwidth (CH Mid)

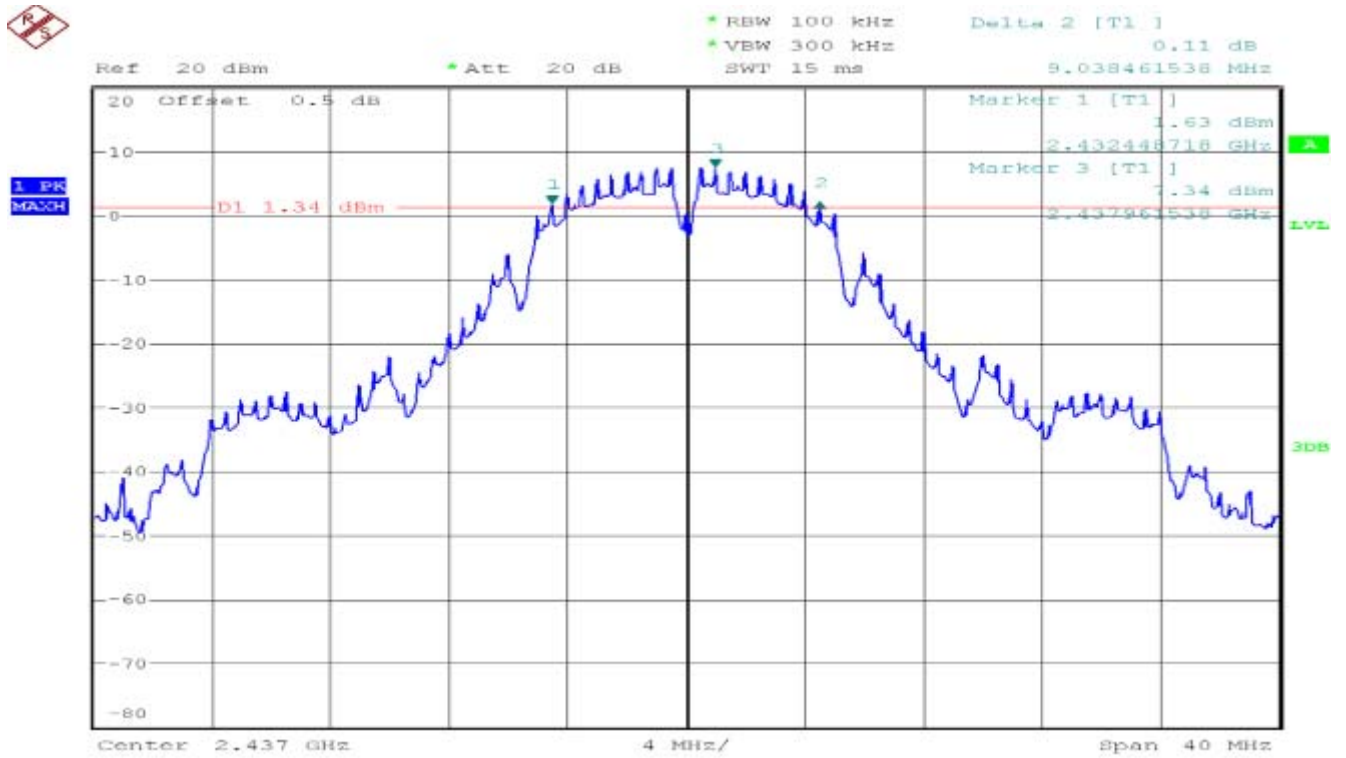


6dB Bandwidth (CH High)

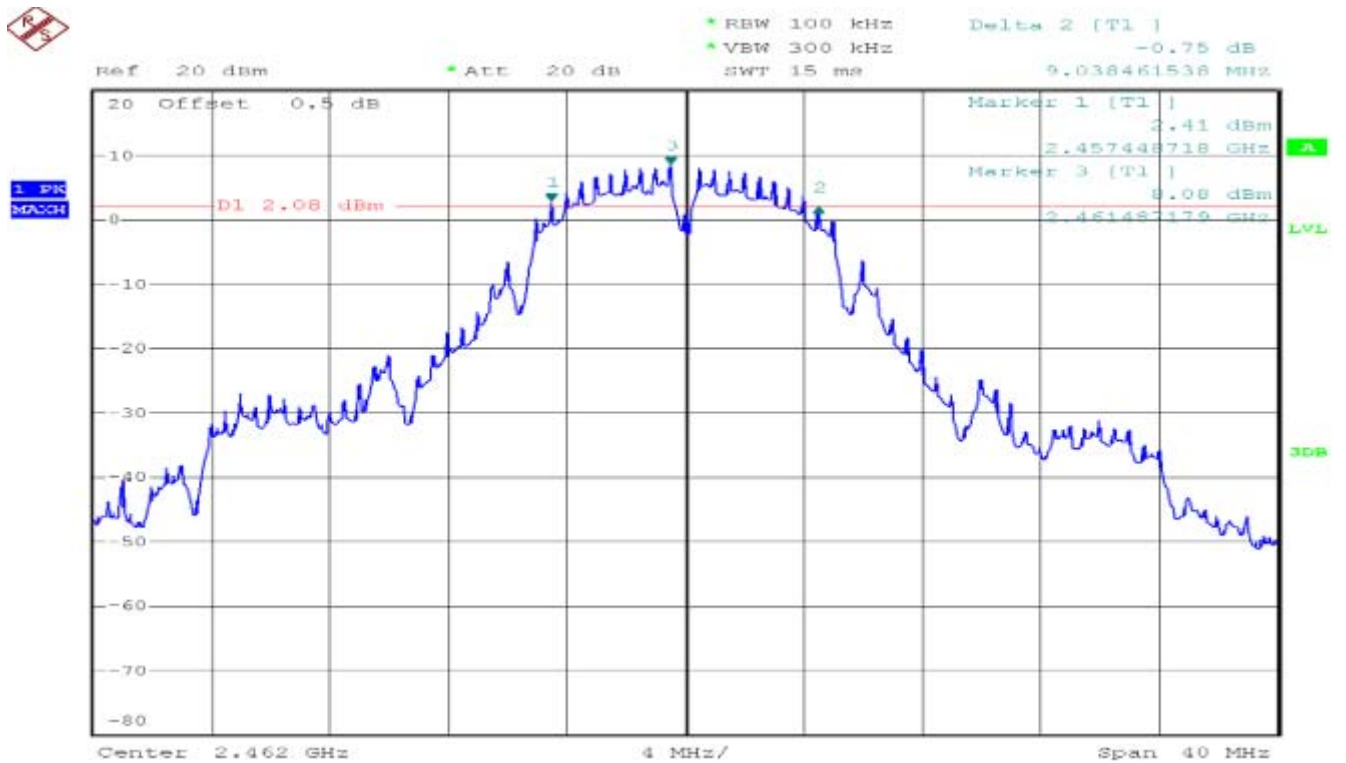


IEEE 802.11g MODE /Chain 0


6dB Bandwidth (CH Low)

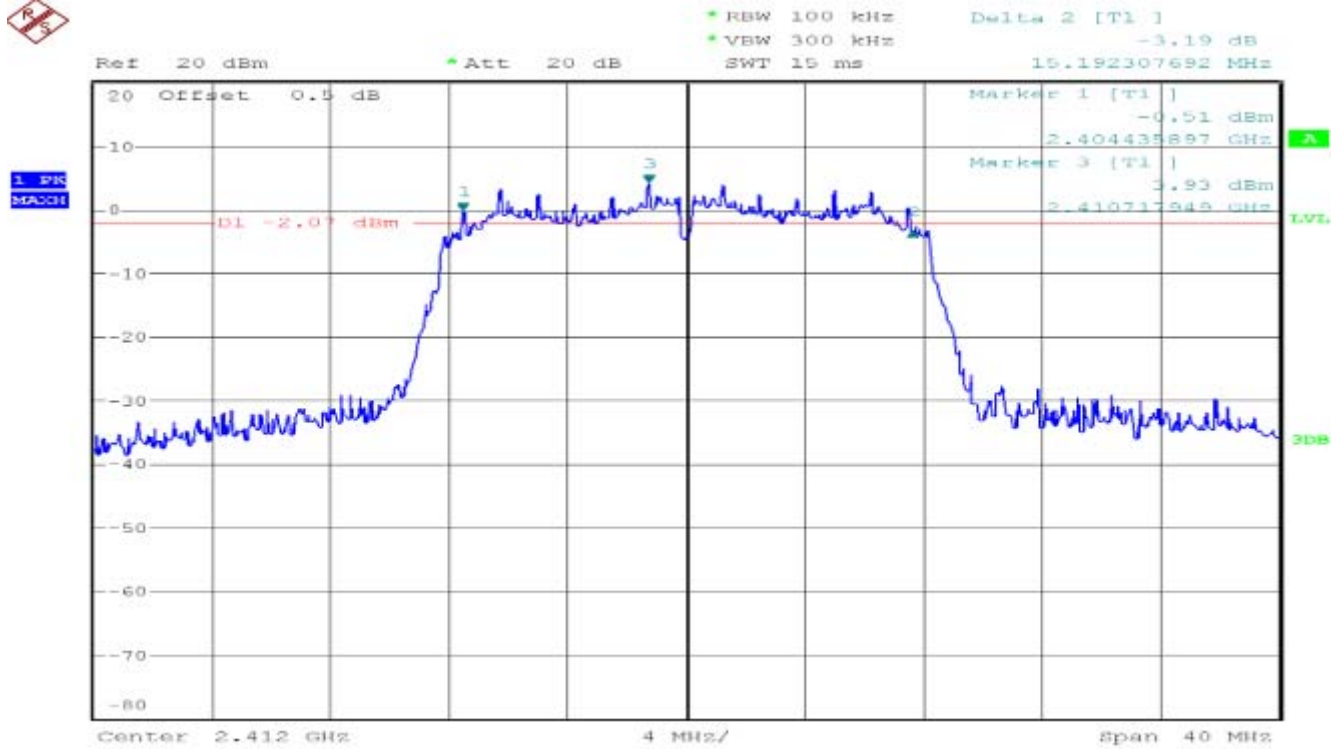

6dB Bandwidth (CH Mid)

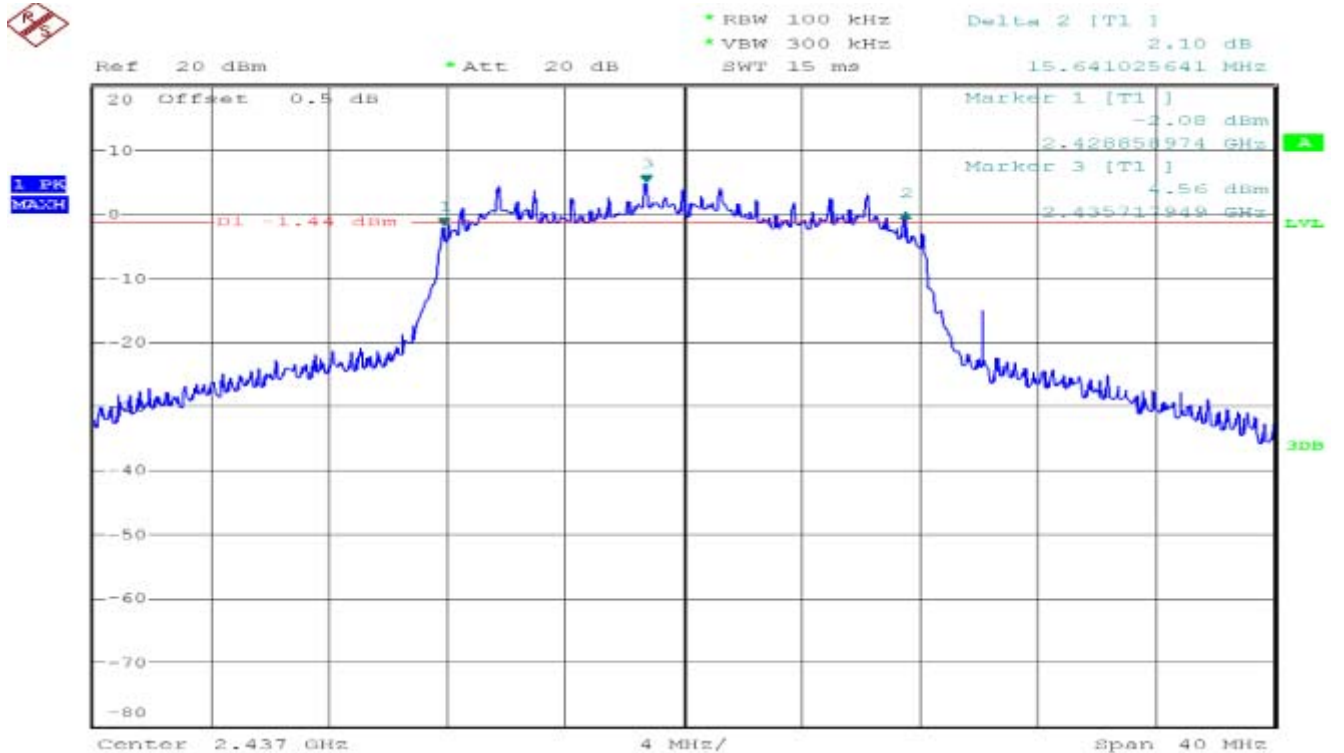


6dB Bandwidth (CH High)

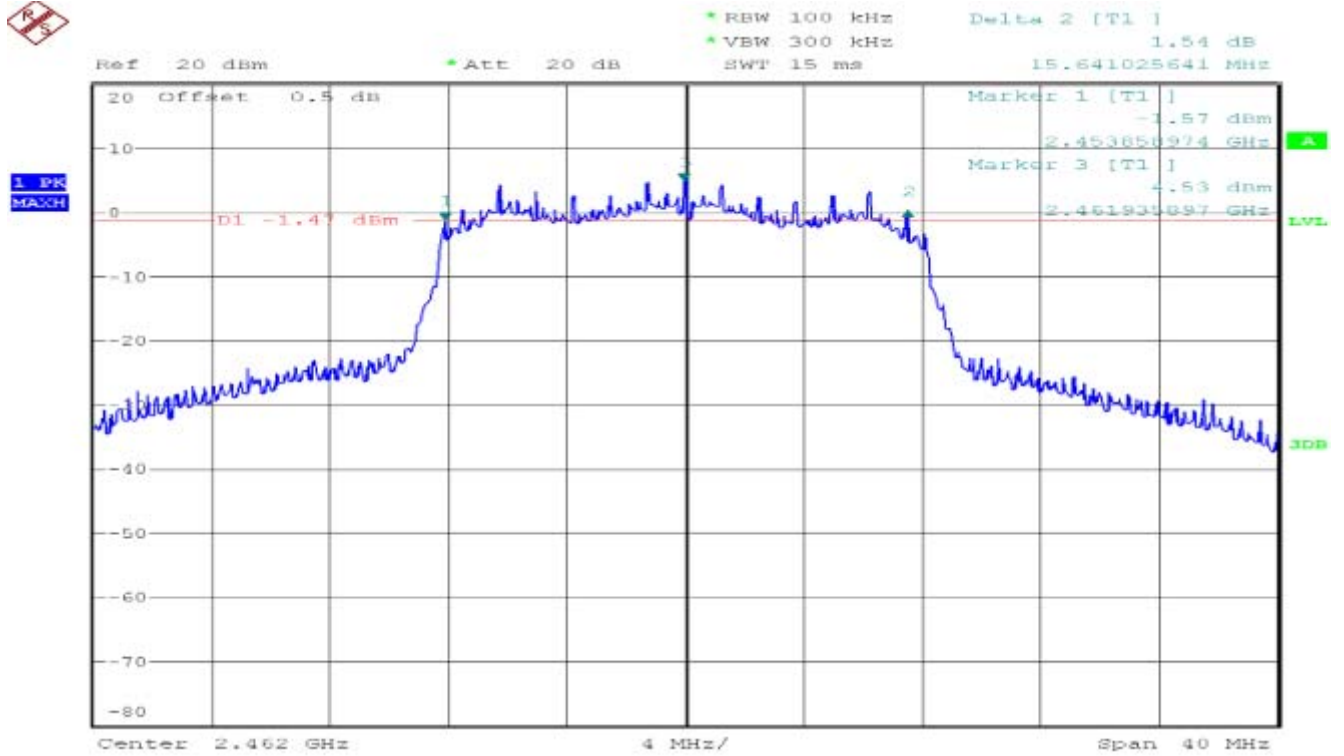


IEEE 802.11g MODE /Chain 1


6dB Bandwidth (CH Low)

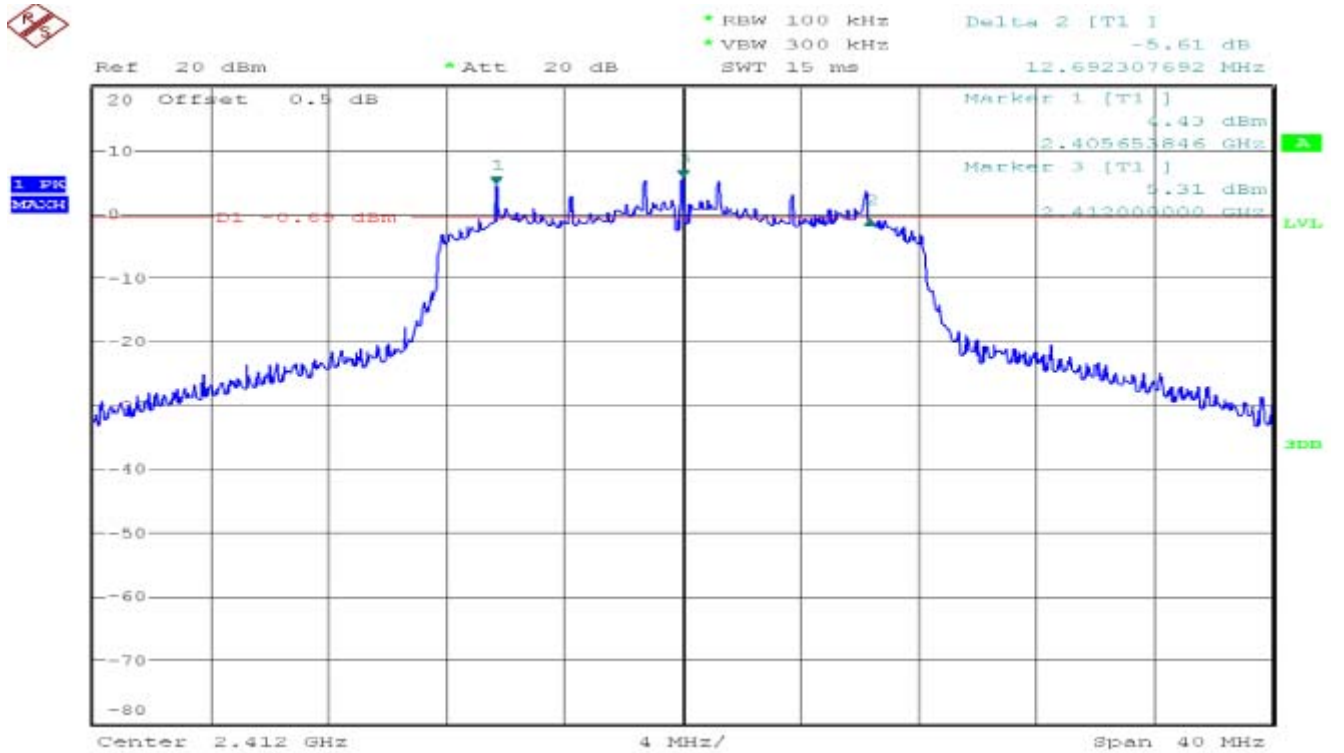

6dB Bandwidth (CH Mid)

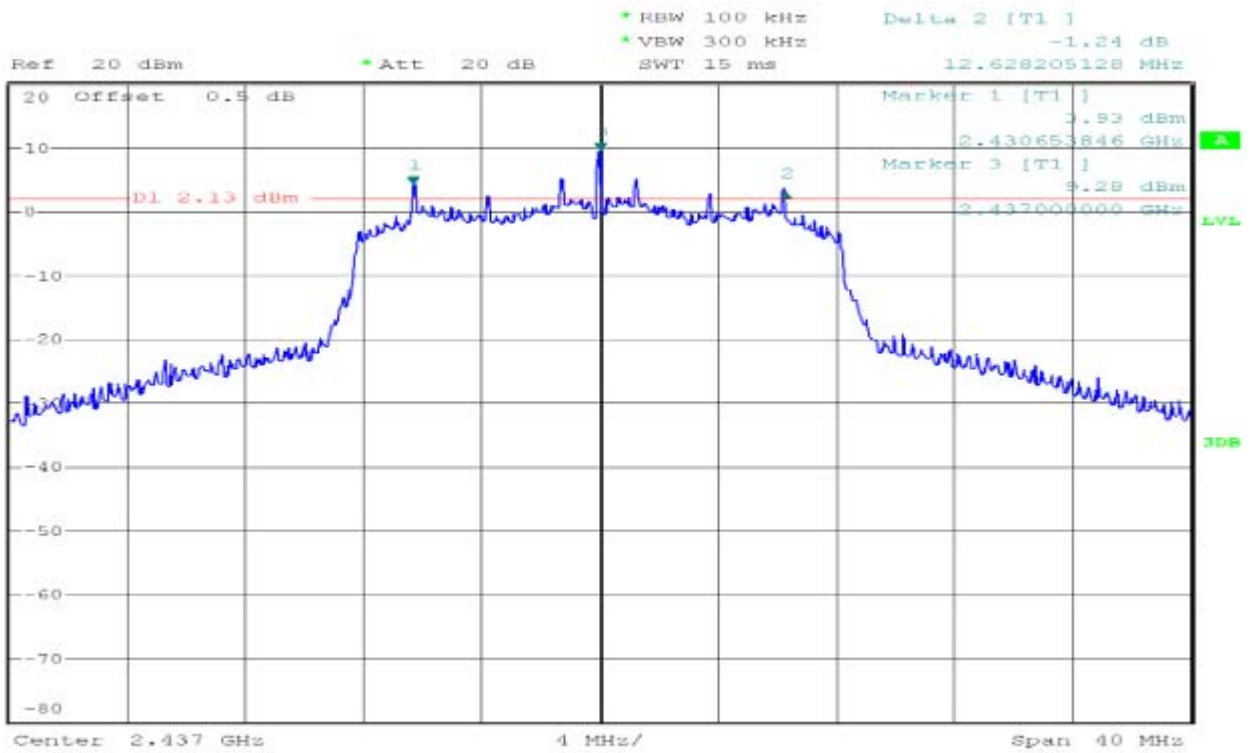


6dB Bandwidth (CH High)

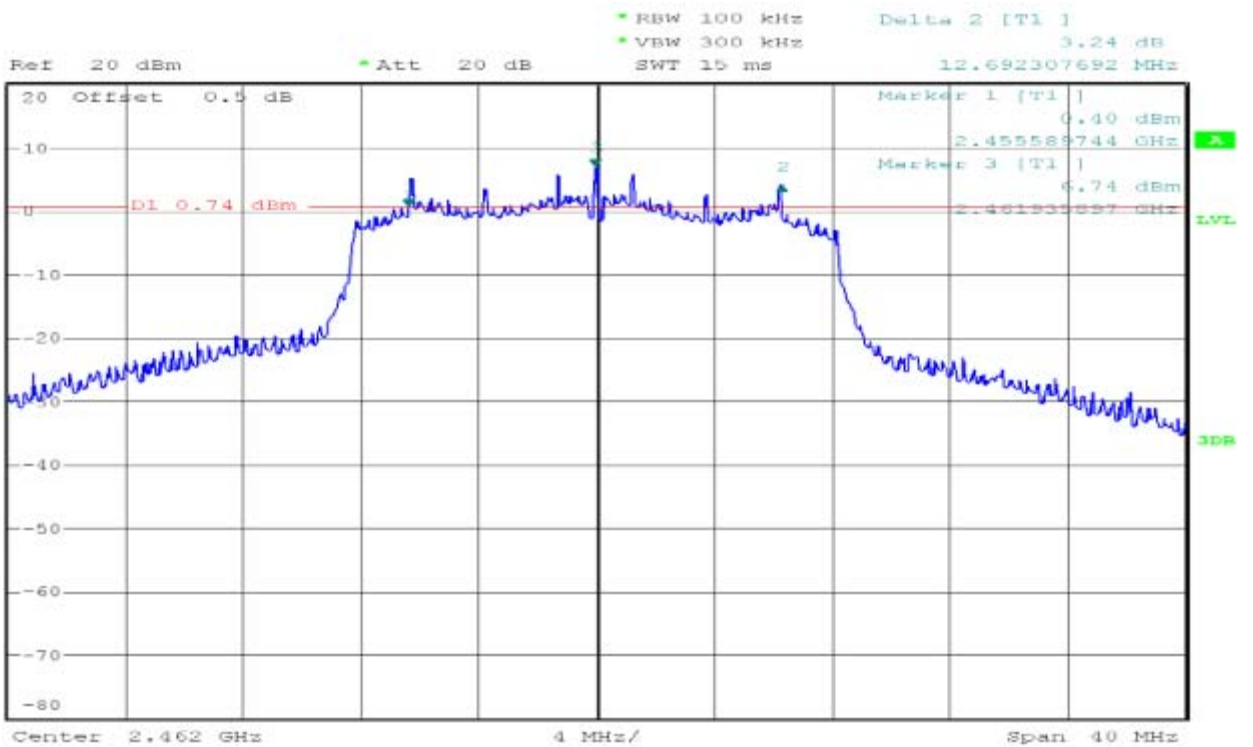


IEEE 802.11n HT20 mode / Chain 0


6dB Bandwidth (CH Low)

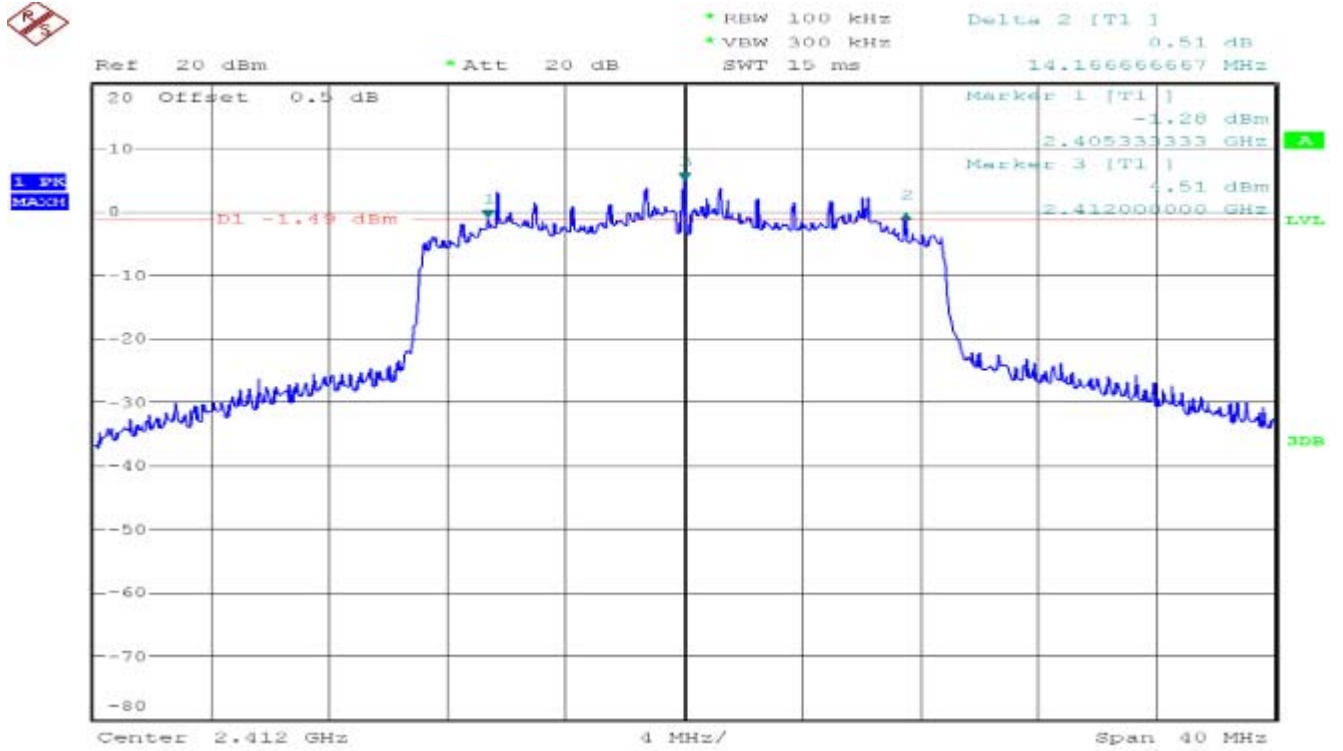

6dB Bandwidth (CH Mid)

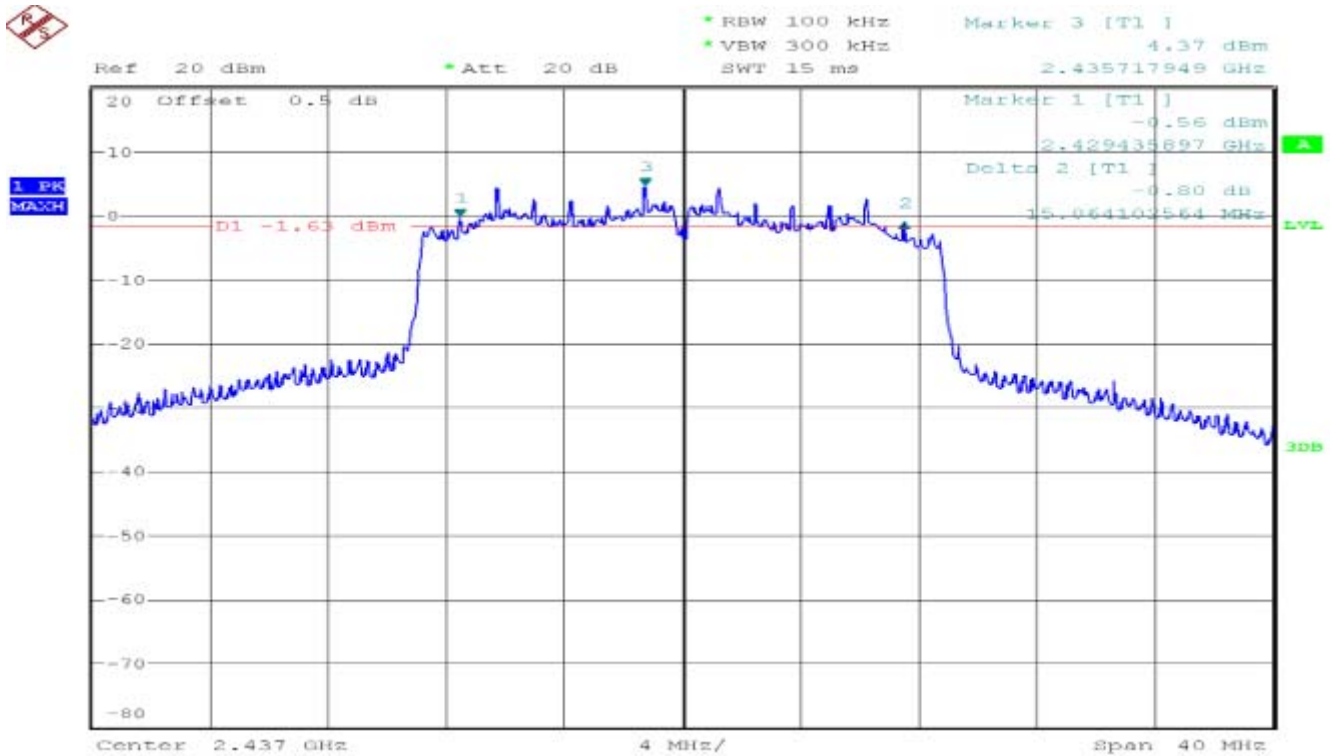


6dB Bandwidth (CH High)

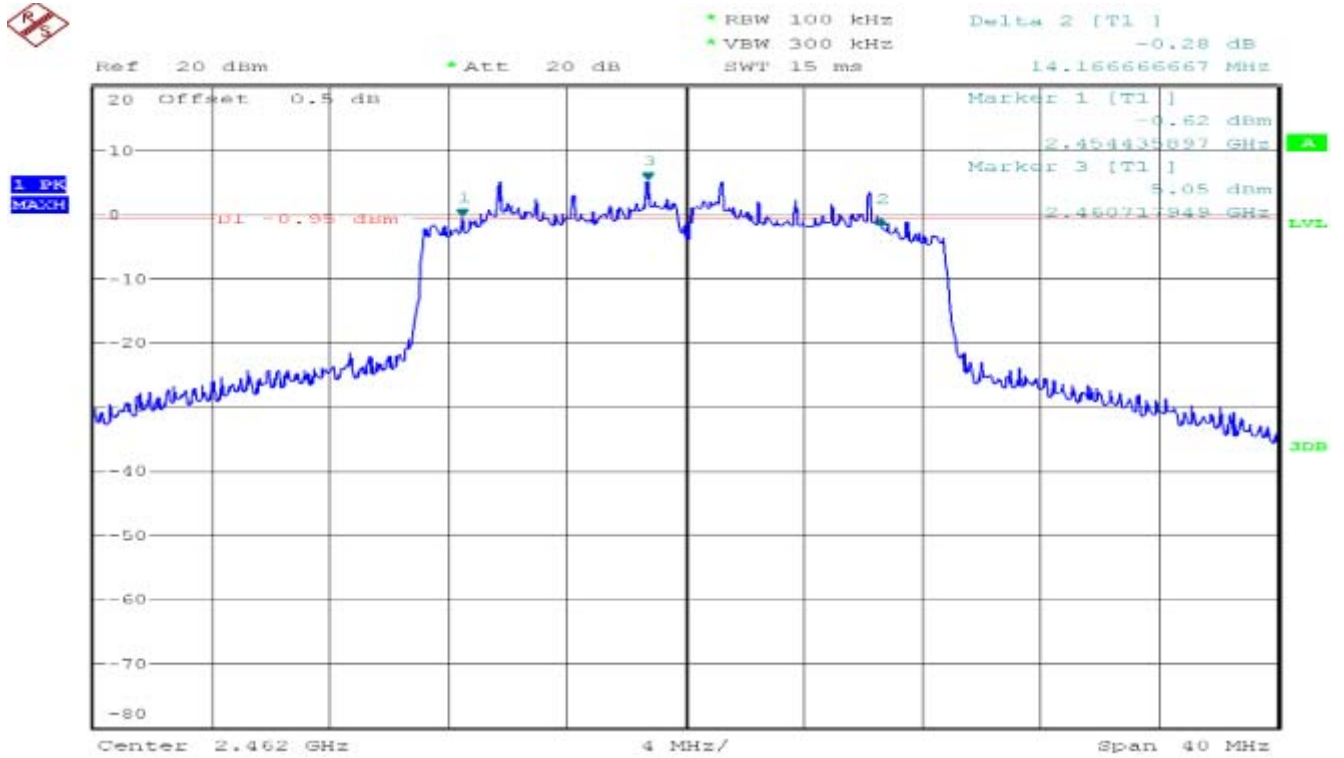


IEEE 802.11n HT20 mode / Chain 1


6dB Bandwidth (CH Low)

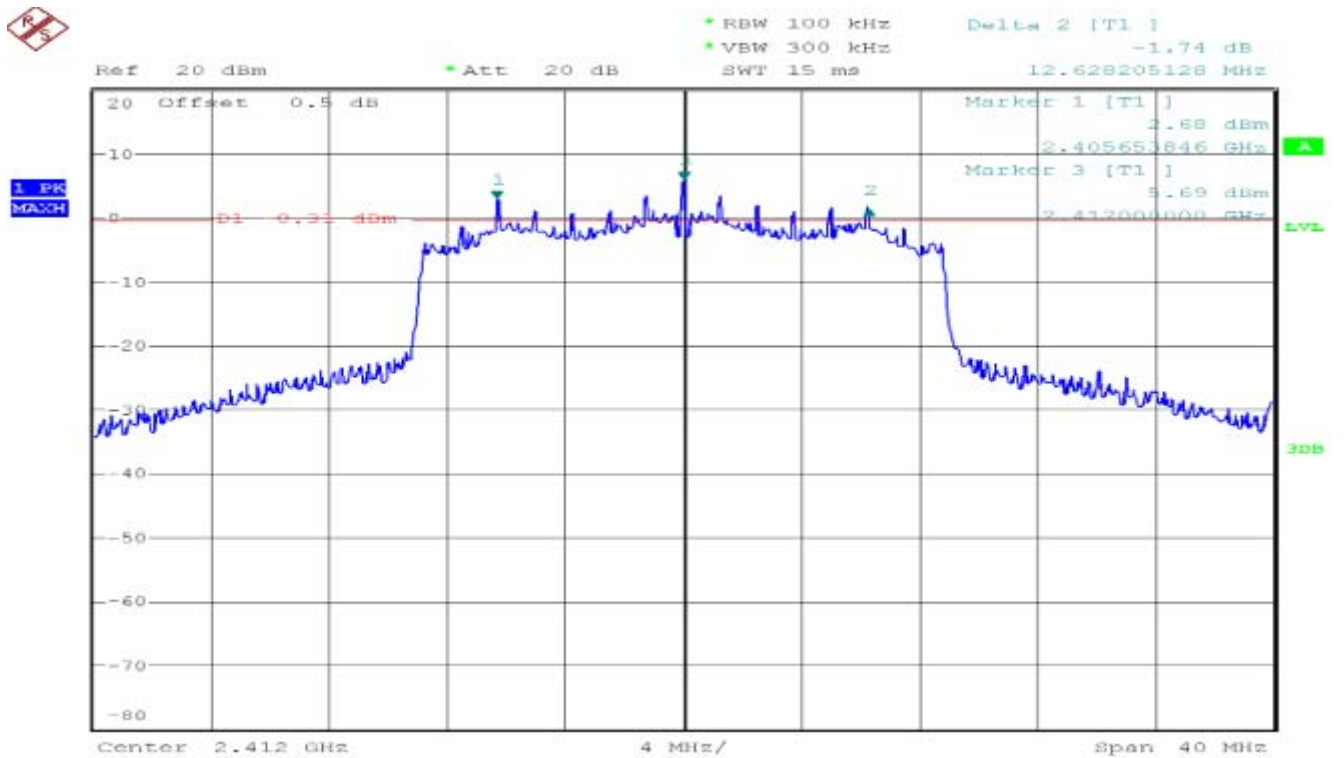

6dB Bandwidth (CH Mid)

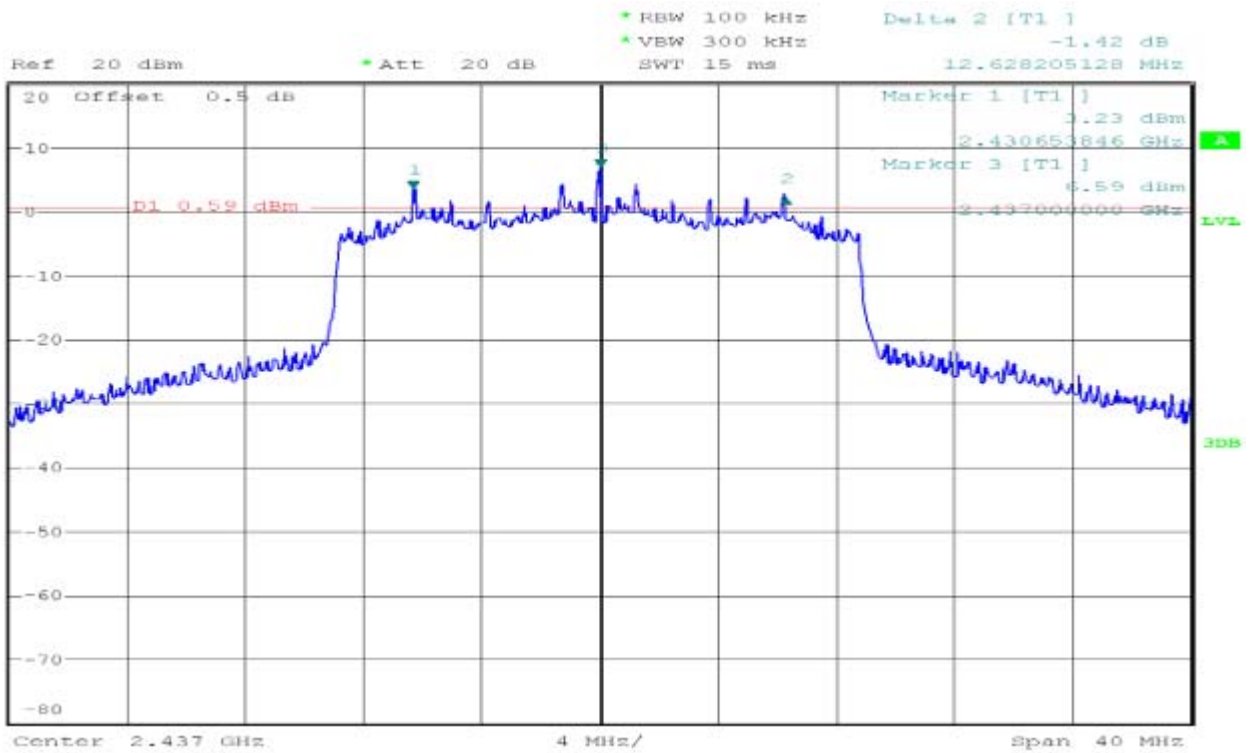


6dB Bandwidth (CH High)

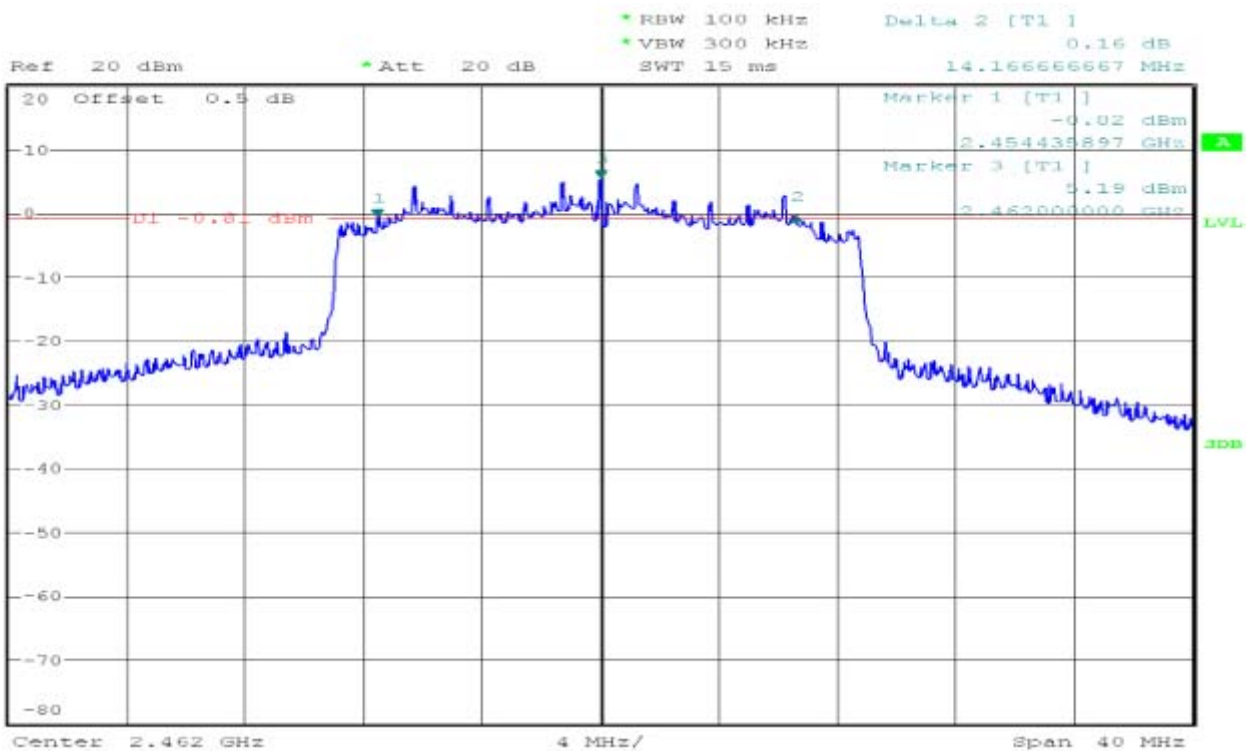


IEEE 802.11n HT40 mode / Chain 0


6dB Bandwidth (CH Low)

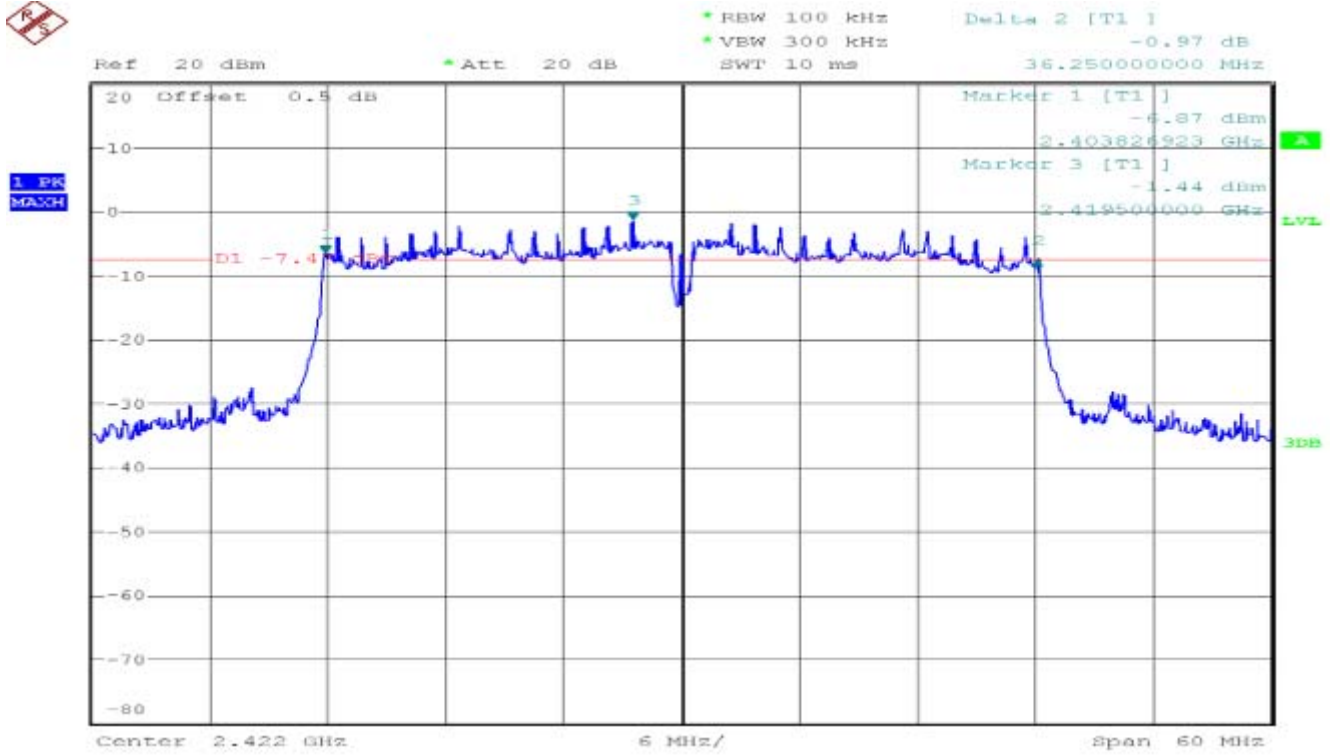

6dB Bandwidth (CH Mid)

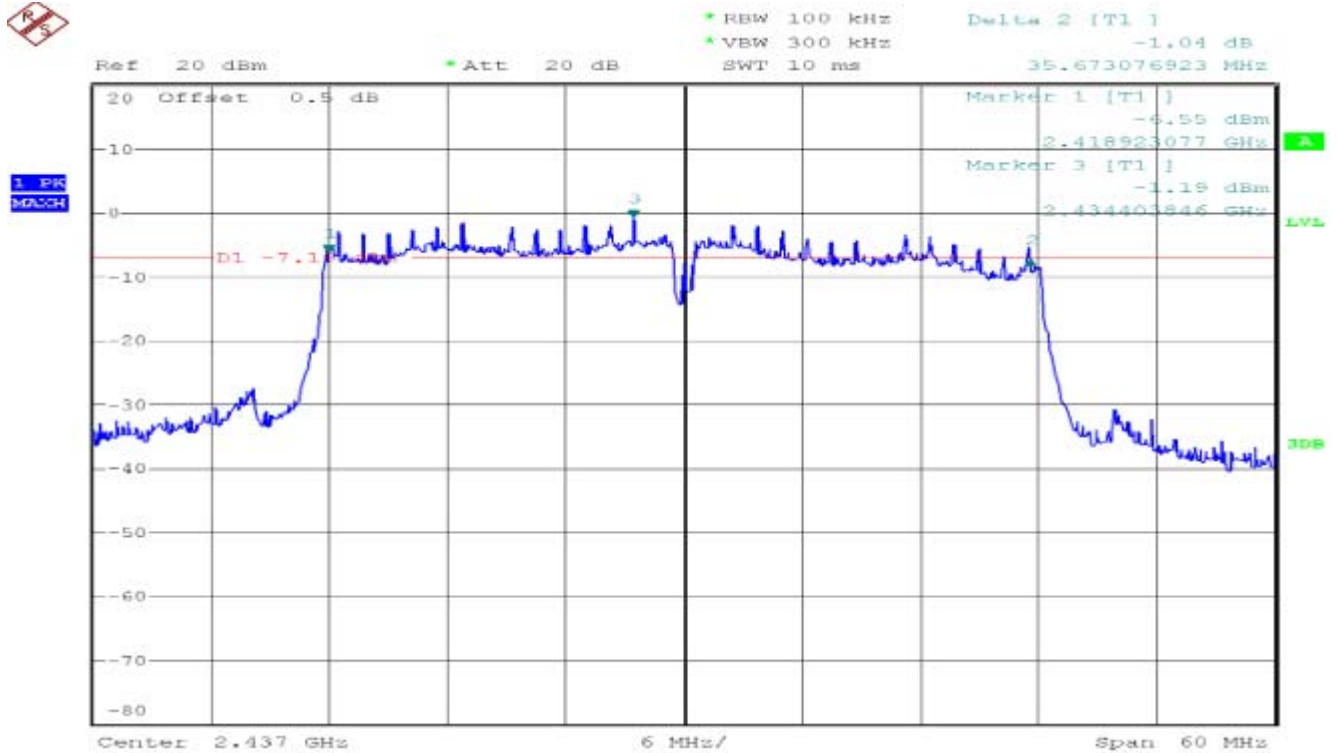


6dB Bandwidth (CH High)

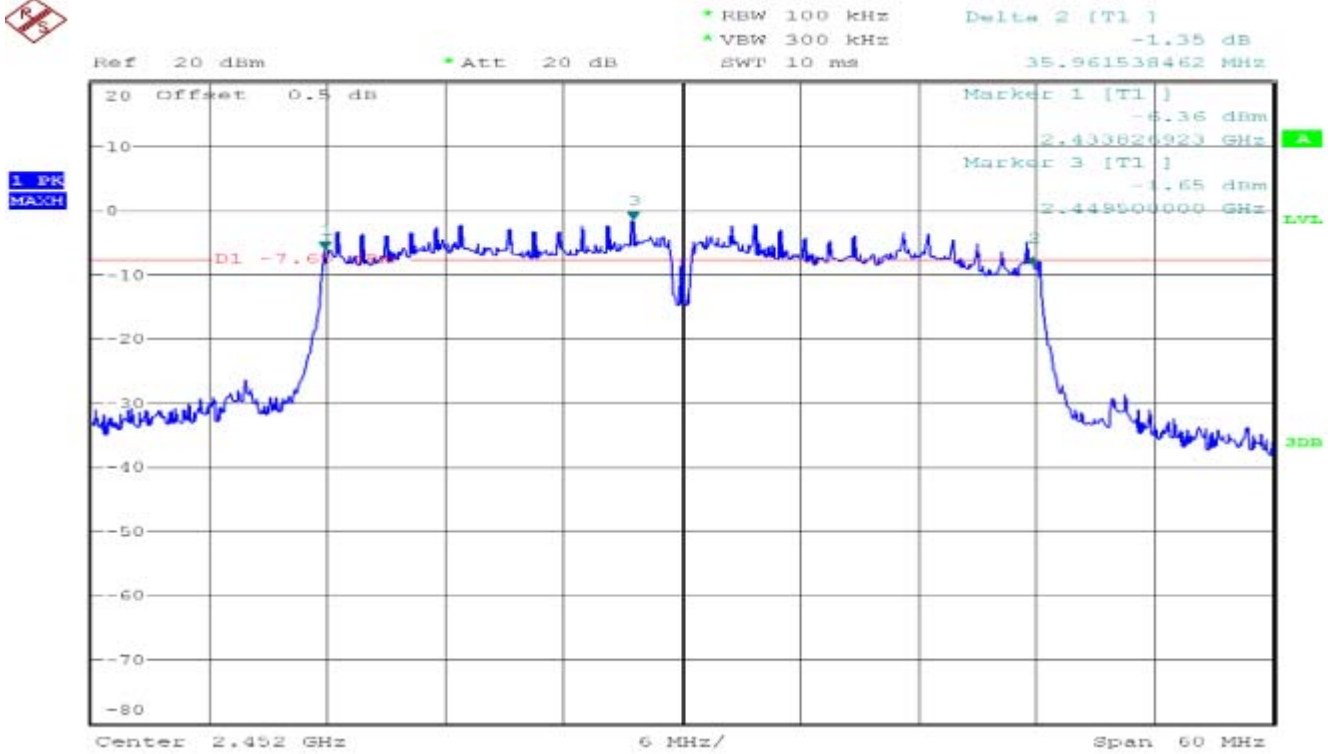


IEEE 802.11n HT40 mode / Chain 1


6dB Bandwidth (CH Low)

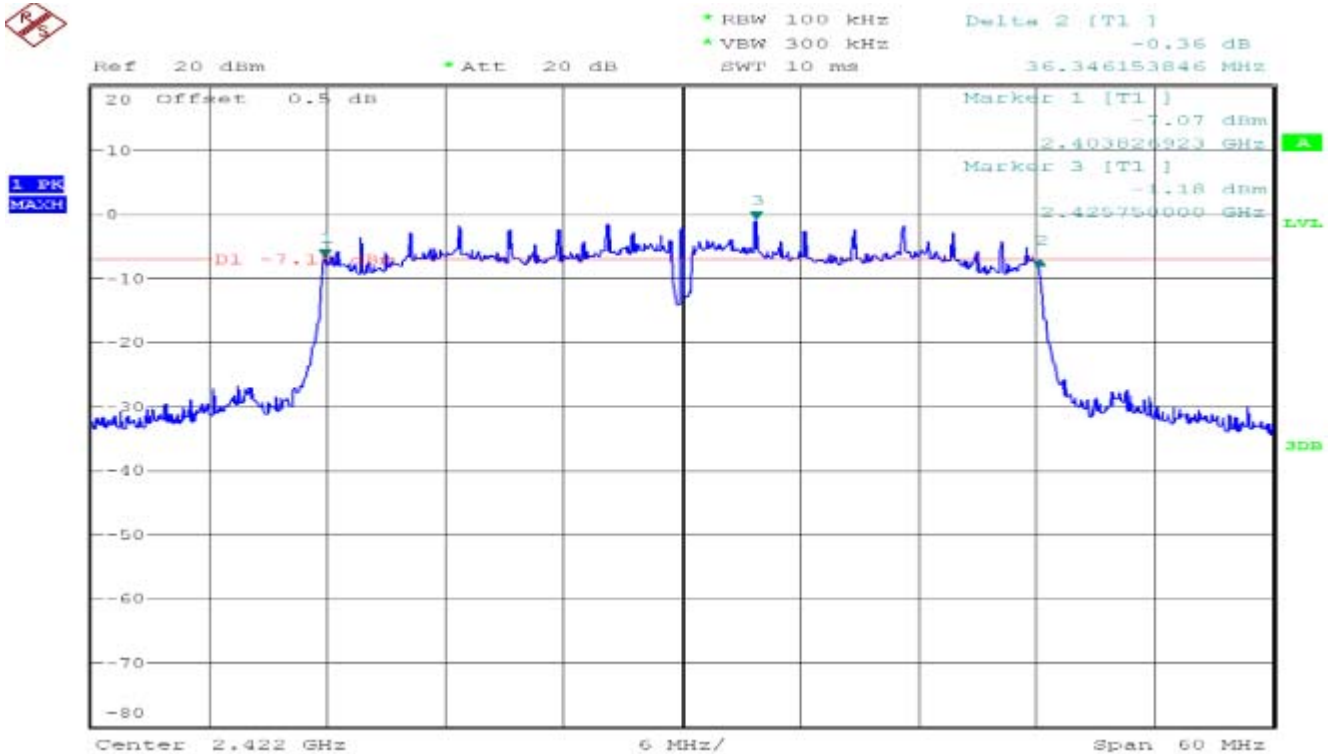

6dB Bandwidth (CH Mid)

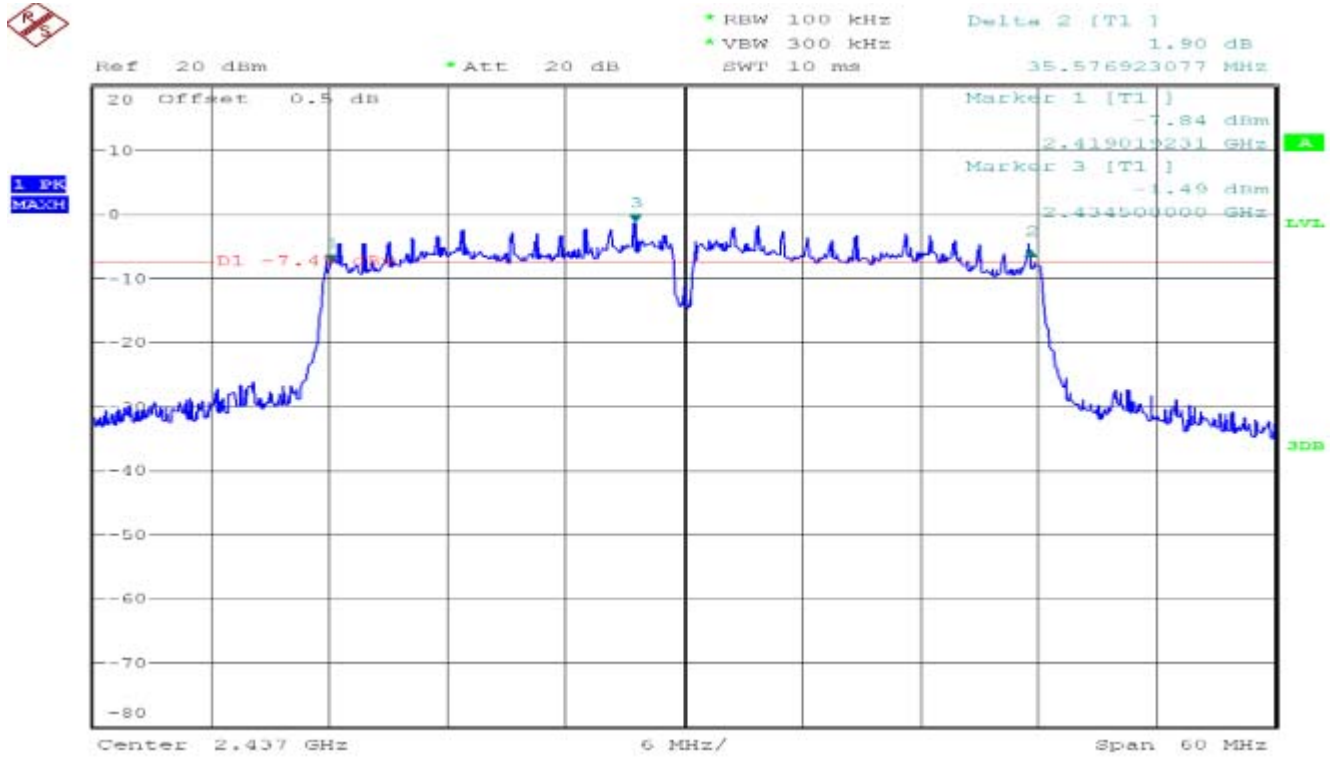

6dB Bandwidth (CH High)

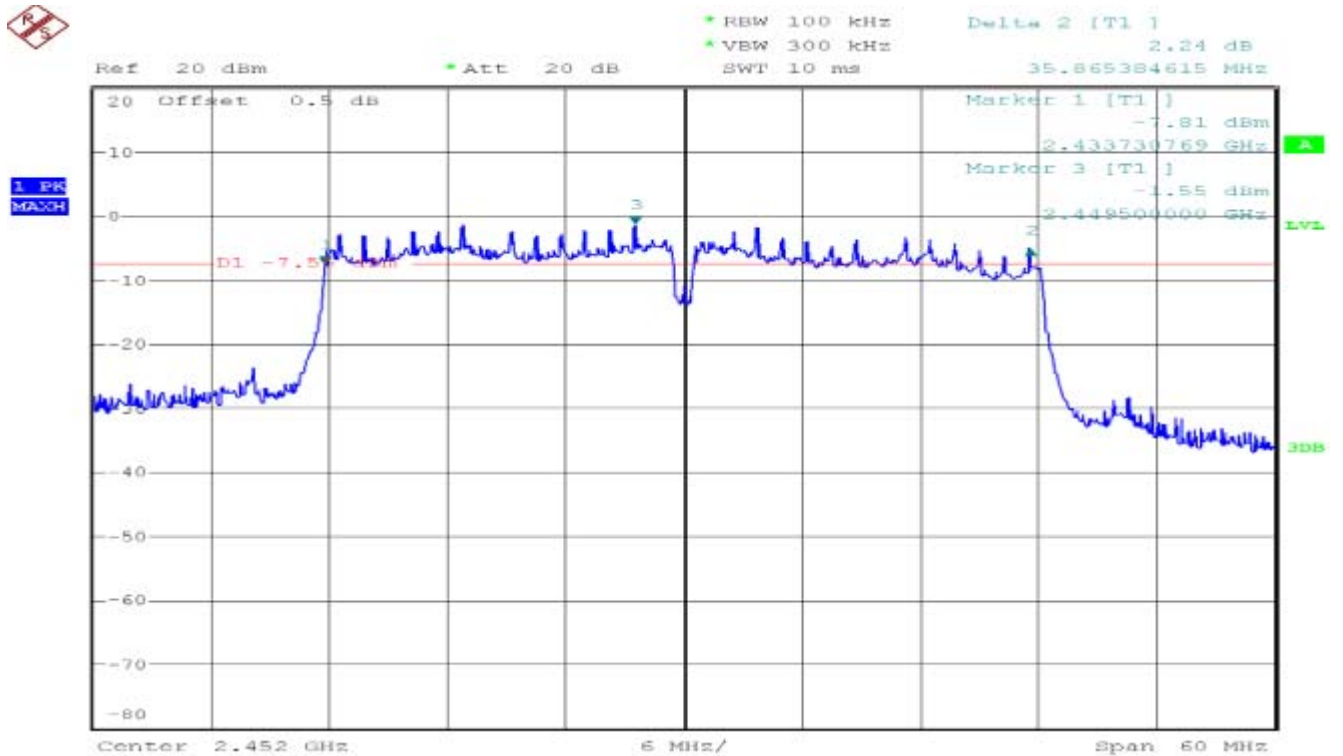


7.2. 99% BANDWIDTH MEASUREMENT

LIMIT

None; for reporting purposes only
RSS-Gen 6.6

Test Configuration



TEST PROCEDURE

The transmitter output is connected to the spectrum analyzer. The RBW shall be in the range of 1% to 5% of the occupied bandwidth and VBW shall be approximately 3x RBW. The sweep time is coupled. The spectrum analyzer internal 99% bandwidth function is utilized.

TEST RESULTS

No non-compliance noted

Test Data

IEEE 802.11b mode/Chain 0

| Channel | Frequency (MHz) | Bandwidth (MHz) |
|---------|-----------------|-----------------|
| Low | 2412 | 10.385 |
| Mid | 2437 | 10.385 |
| High | 2462 | 10.513 |

IEEE 802.11b mode/Chain 1

| Channel | Frequency (MHz) | Bandwidth (MHz) |
|---------|-----------------|-----------------|
| Low | 2412 | 10.321 |
| Mid | 2437 | 11.923 |
| High | 2462 | 11.410 |

IEEE 802.11g mode/Chain 0

| Channel | Frequency (MHz) | Bandwidth (MHz) |
|---------|-----------------|-----------------|
| Low | 2412 | 16.667 |
| Mid | 2437 | 16.667 |
| High | 2462 | 16.603 |

IEEE 802.11g mode/Chain 1

| Channel | Frequency (MHz) | Bandwidth (MHz) |
|---------|-----------------|-----------------|
| Low | 2412 | 16.987 |
| Mid | 2437 | 17.051 |
| High | 2462 | 16.987 |

IEEE 802.11n HT20 mode/Chain 0

| Channel | Frequency (MHz) | Bandwidth (MHz) |
|---------|-----------------|-----------------|
| Low | 2412 | 17.628 |
| Mid | 2437 | 17.564 |
| High | 2462 | 17.564 |

IEEE 802.11n HT20 mode/Chain 1

| Channel | Frequency (MHz) | Bandwidth (MHz) |
|---------|-----------------|-----------------|
| Low | 2412 | 17.628 |
| Mid | 2437 | 17.692 |
| High | 2462 | 17.692 |

IEEE 802.11n HT40 mode/Chain 0

| Channel | Frequency (MHz) | Bandwidth (MHz) |
|---------|-----------------|-----------------|
| Low | 2422 | 37.019 |
| Mid | 2437 | 36.827 |
| High | 2452 | 37.115 |


IEEE 802.11n HT40 mode/Chain 1

| Channel | Frequency (MHz) | Bandwidth (MHz) |
|---------|-----------------|-----------------|
| Low | 2422 | 37.212 |
| Mid | 2437 | 37.019 |
| High | 2452 | 37.212 |


Test Plot

IEEE 802.11b MODE /Chain 0


99% Bandwidth (CH Low)

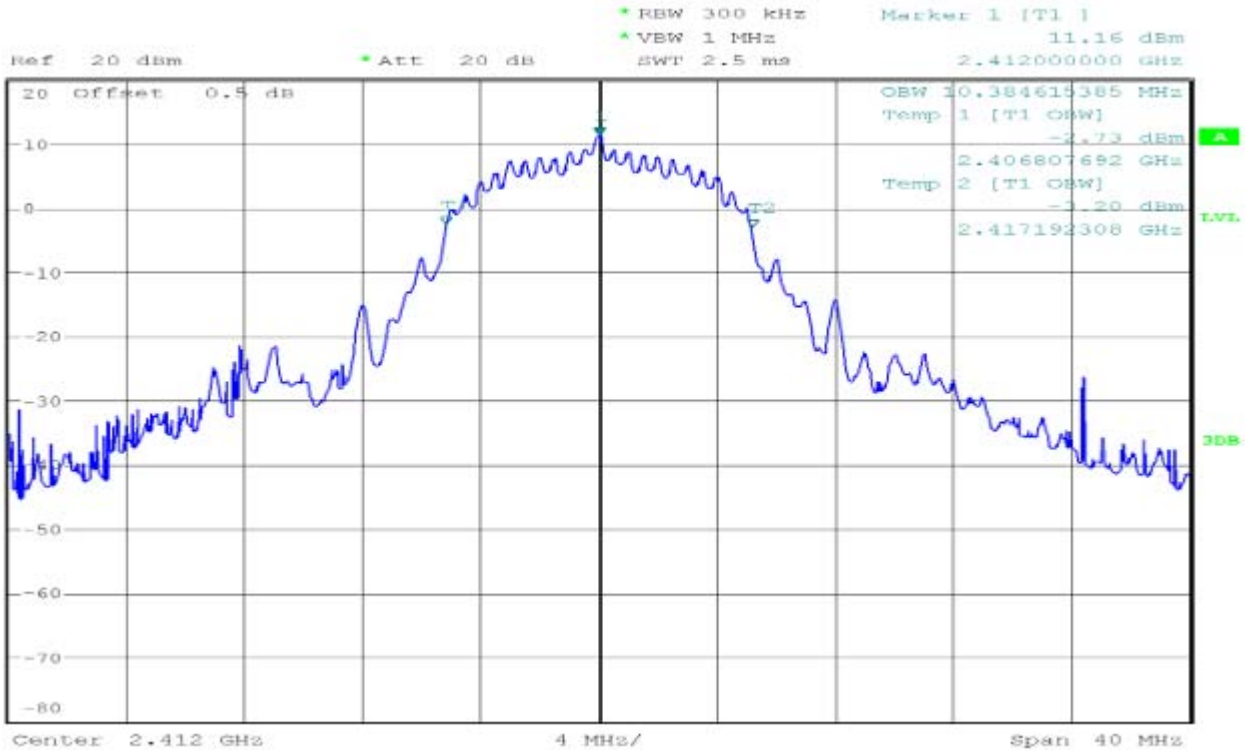

99% Bandwidth (CH Mid)

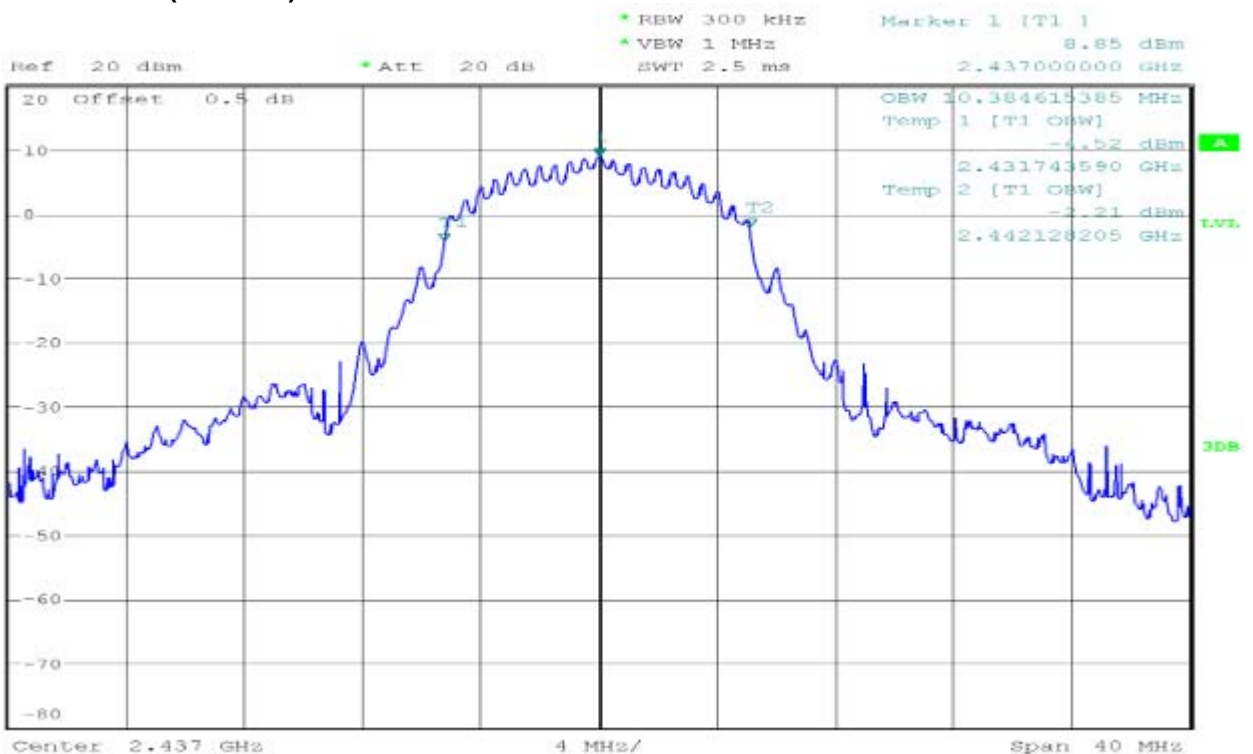


99% Bandwidth(CH High)

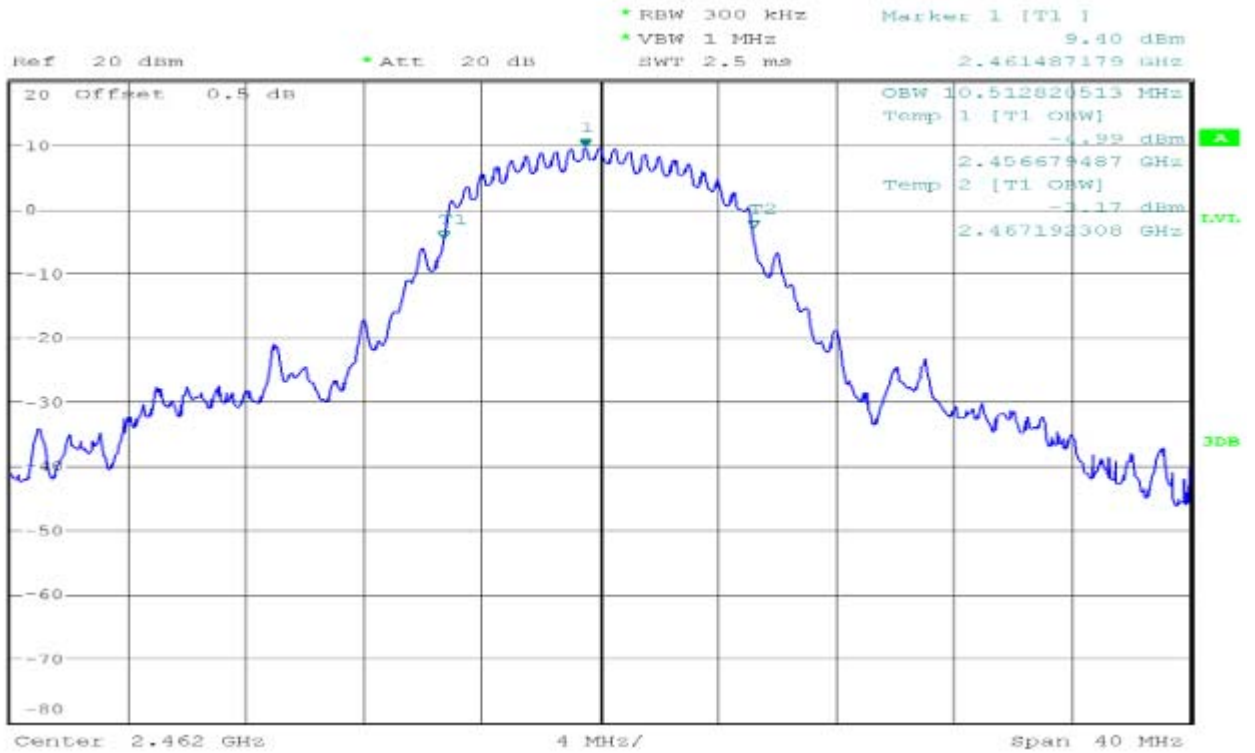


IEEE 802.11b MODE /Chain 1


99% Bandwidth (CH Low)

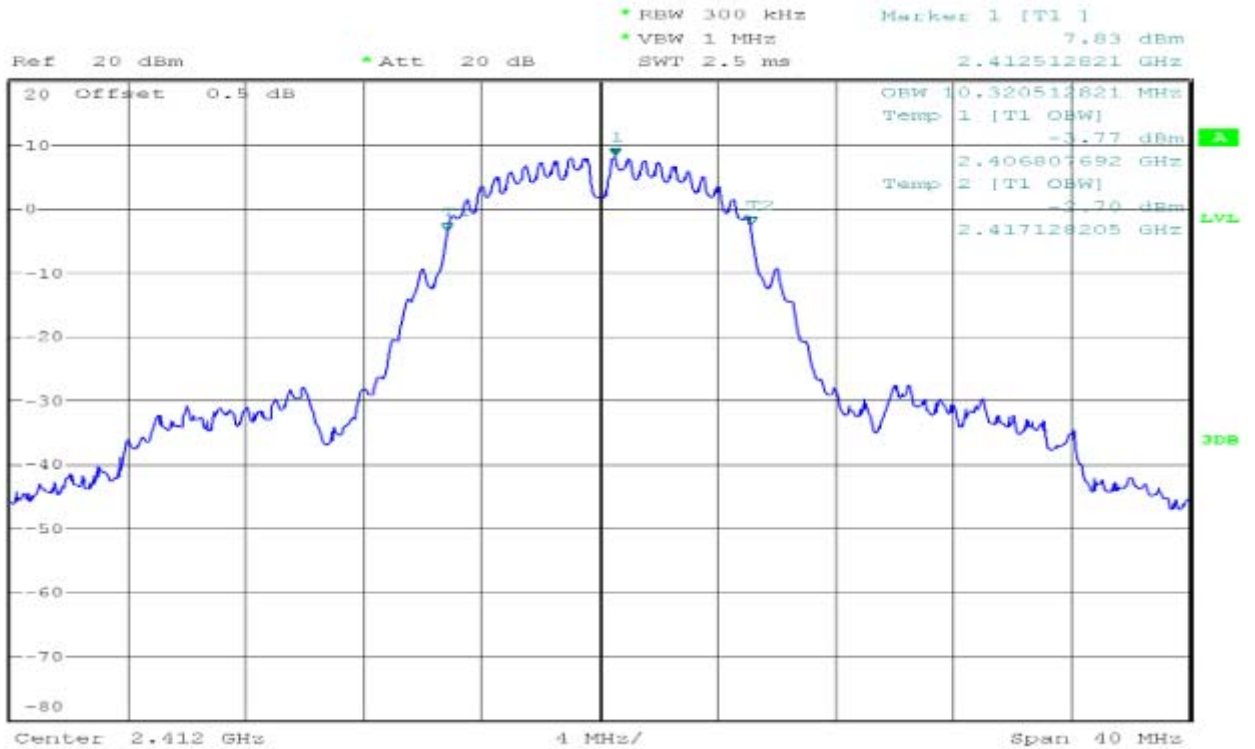

99% Bandwidth (CH Mid)

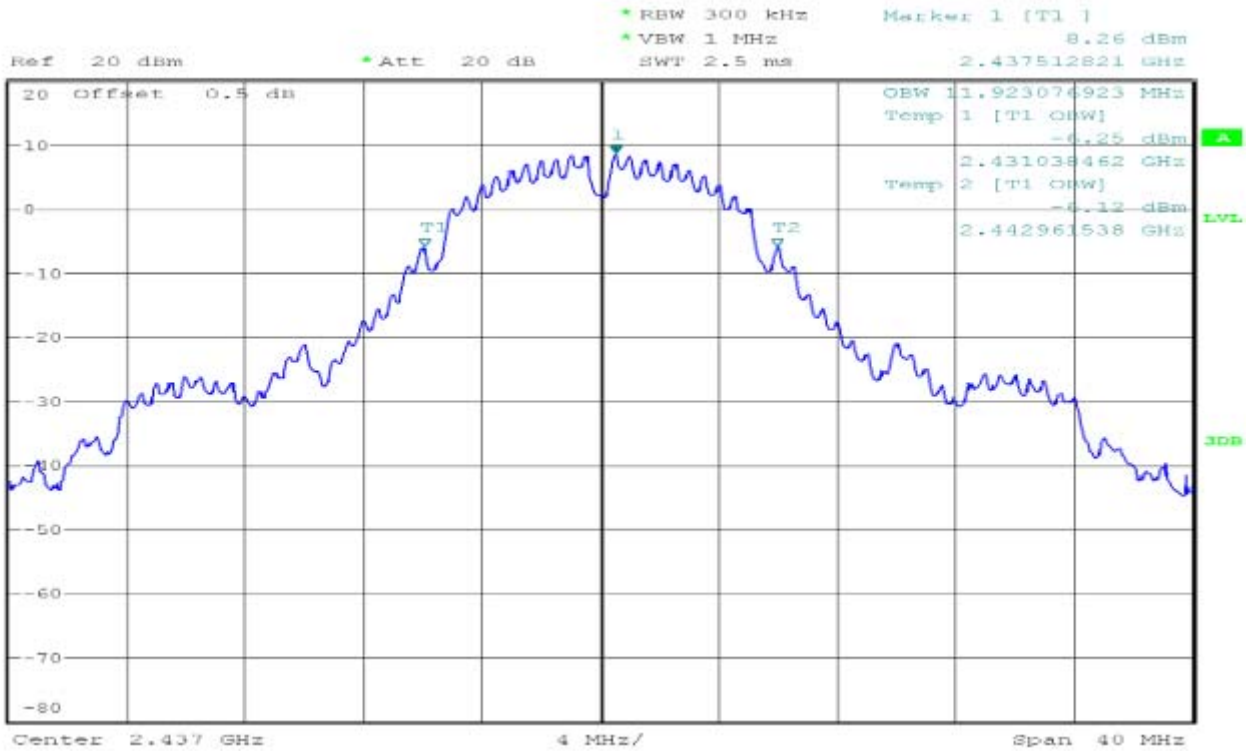


99% Bandwidth(CH High)

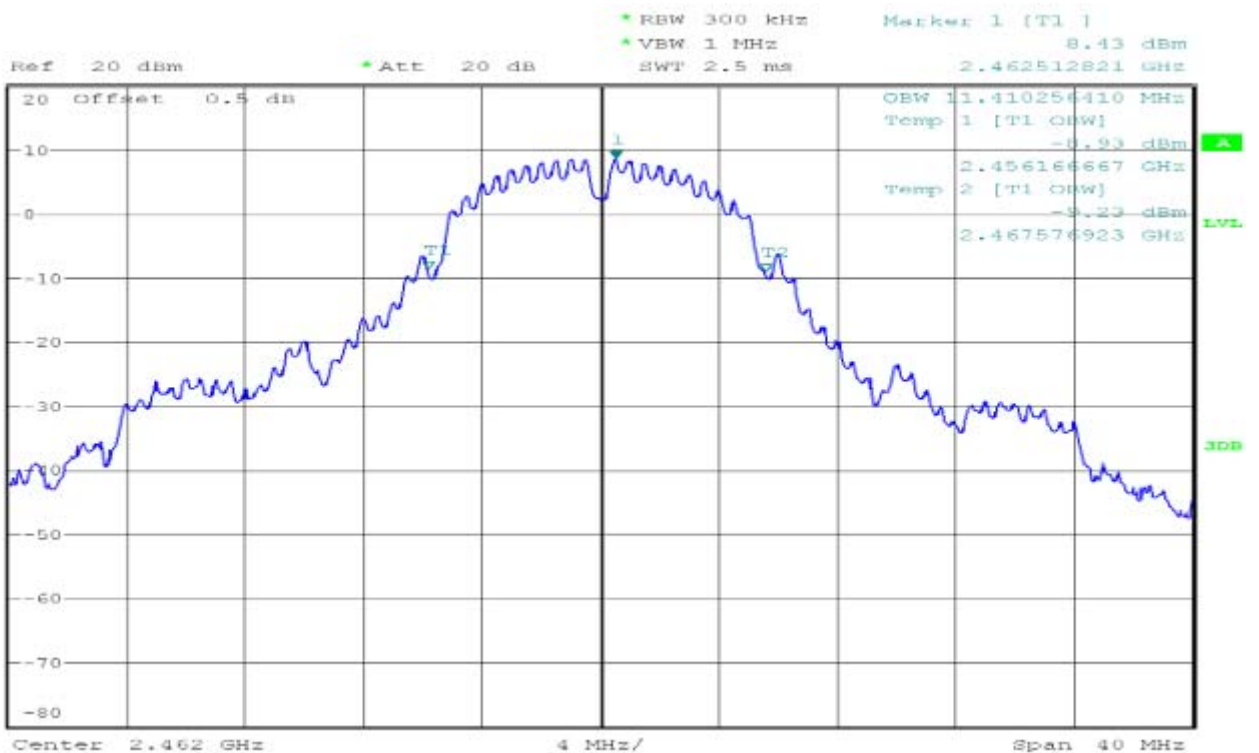


IEEE 802.11g MODE /Chain 0


99% Bandwidth (CH Low)

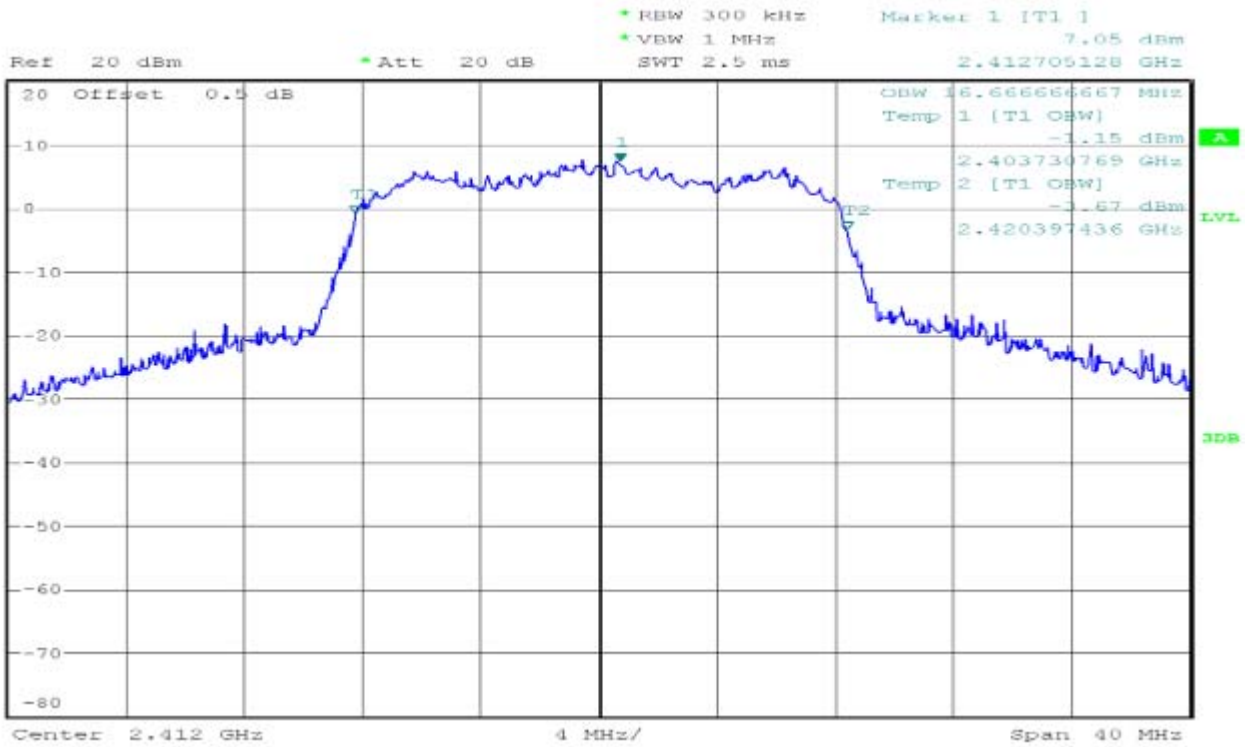

99% Bandwidth (CH Mid)

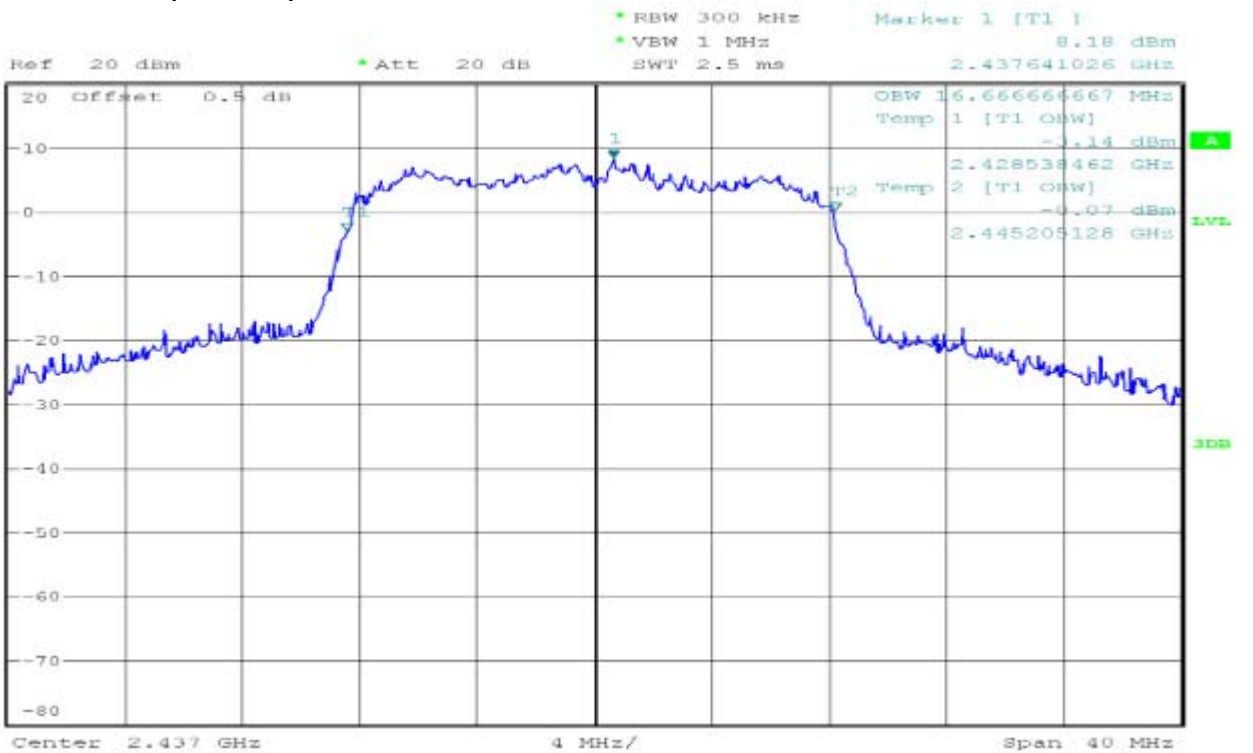


99% Bandwidth(CH High)

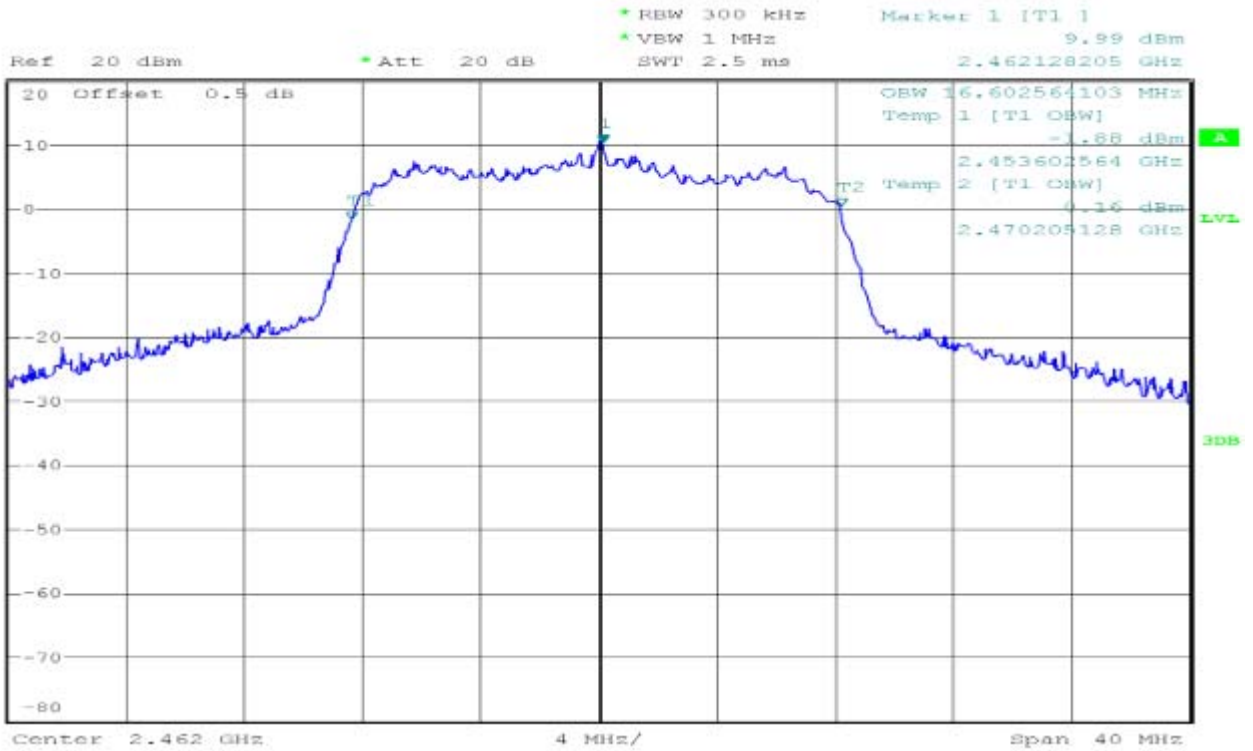


IEEE 802.11g MODE /Chain 1


99% Bandwidth (CH Low)

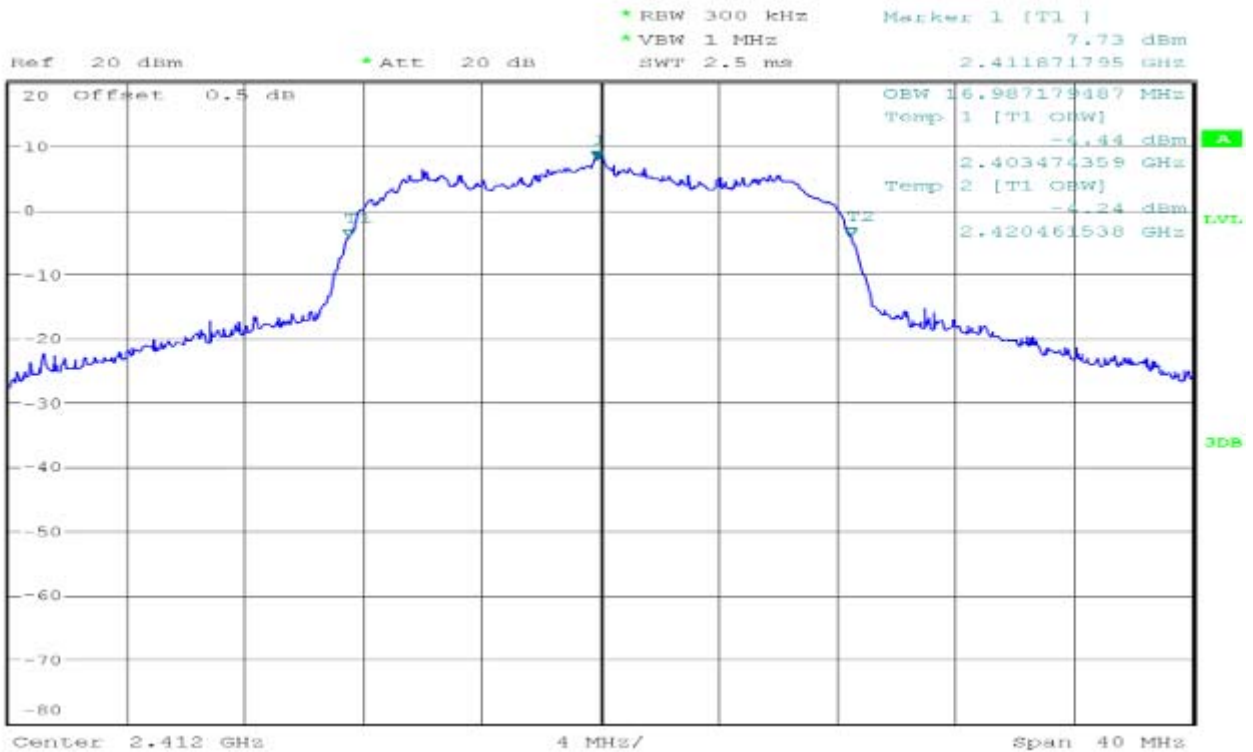

99% Bandwidth (CH Mid)

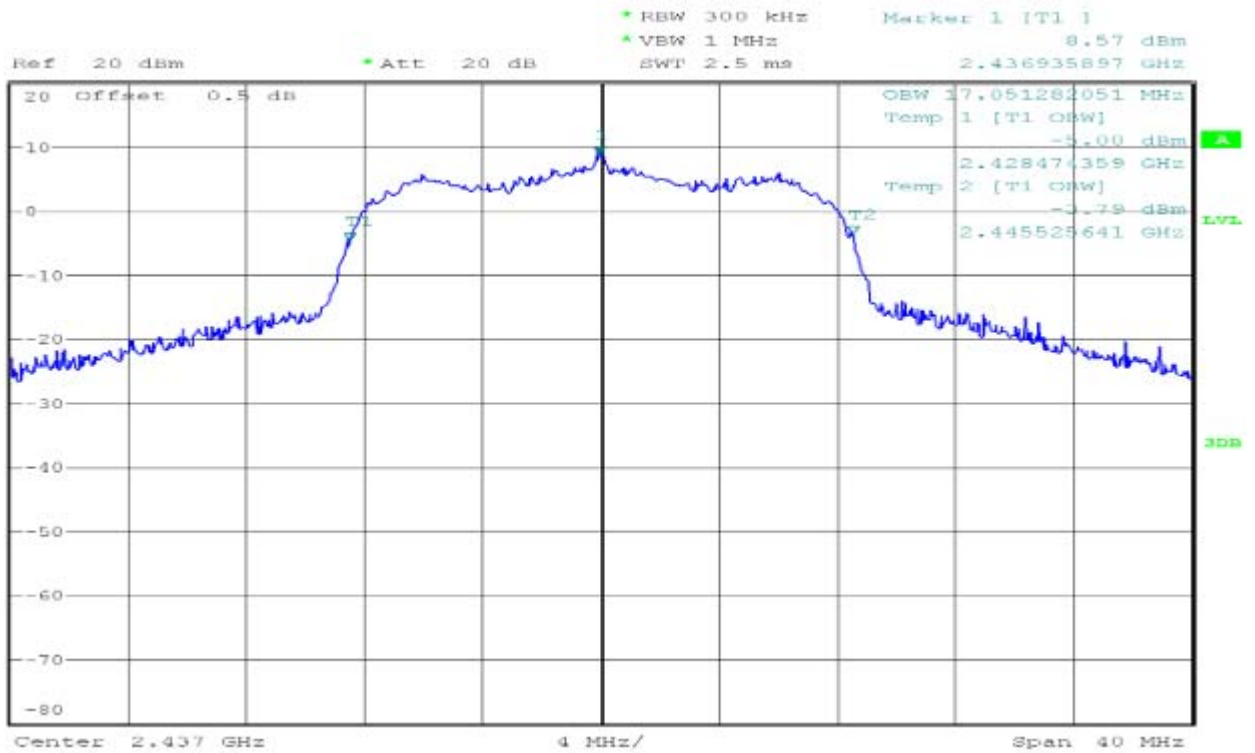


99% Bandwidth(CH High)

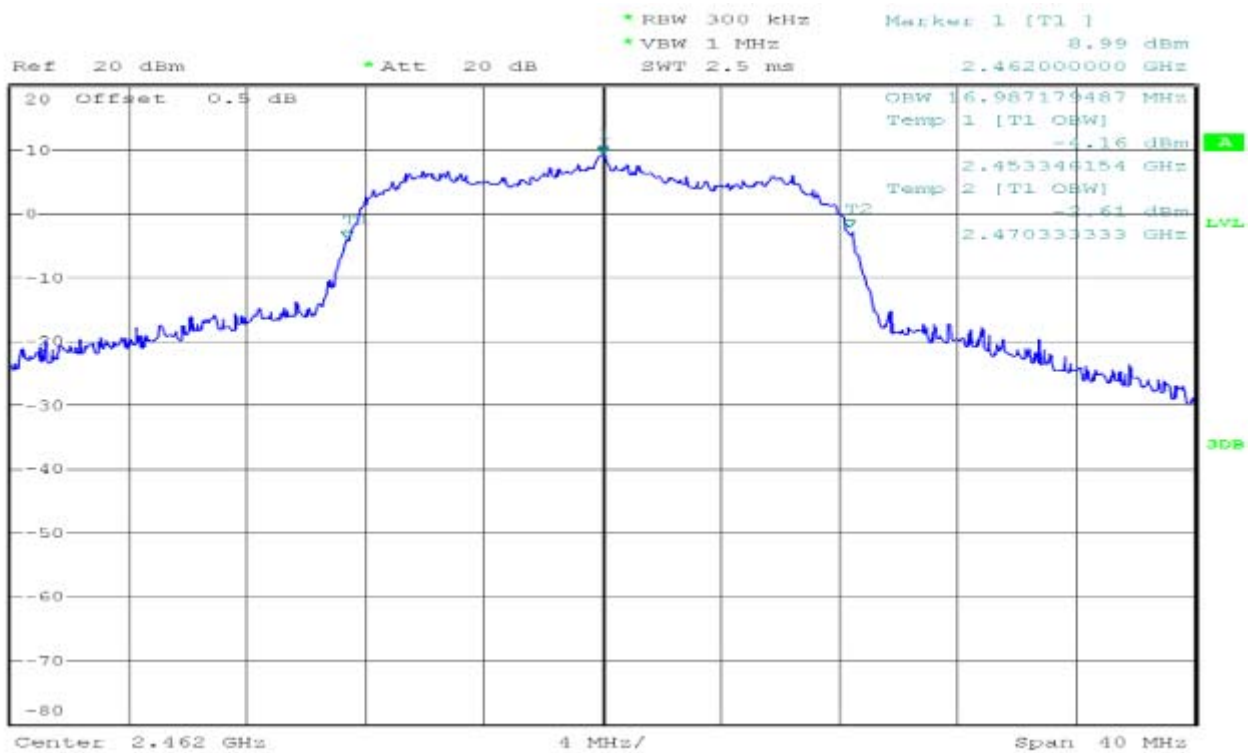


IEEE 802.11n20 MODE /Chain 0


99% Bandwidth (CH Low)

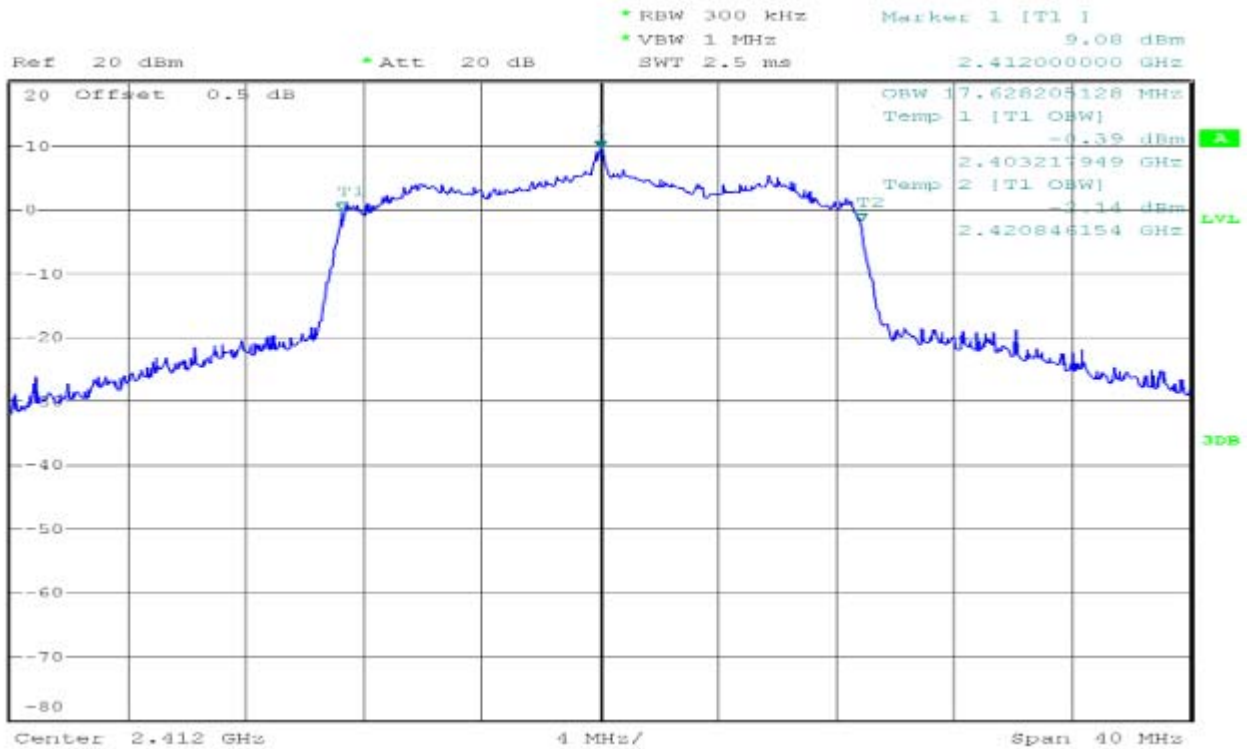

99% Bandwidth (CH Mid)

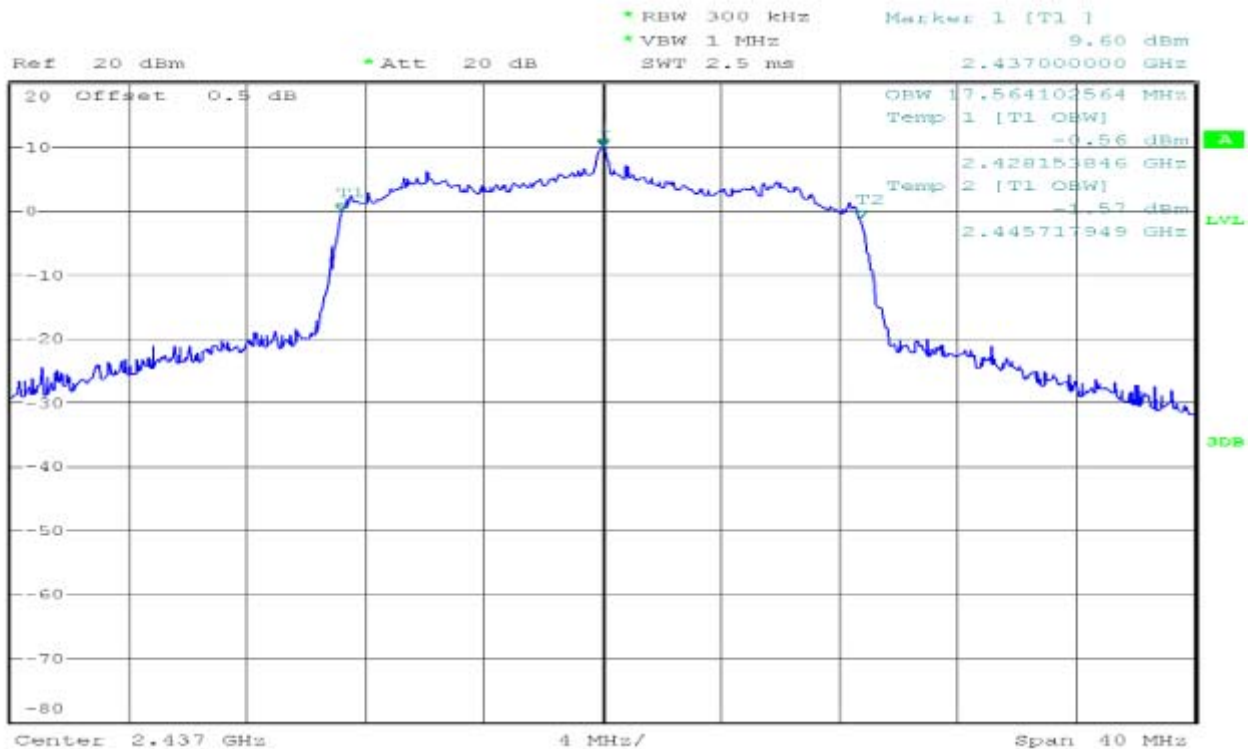


99% Bandwidth(CH High)

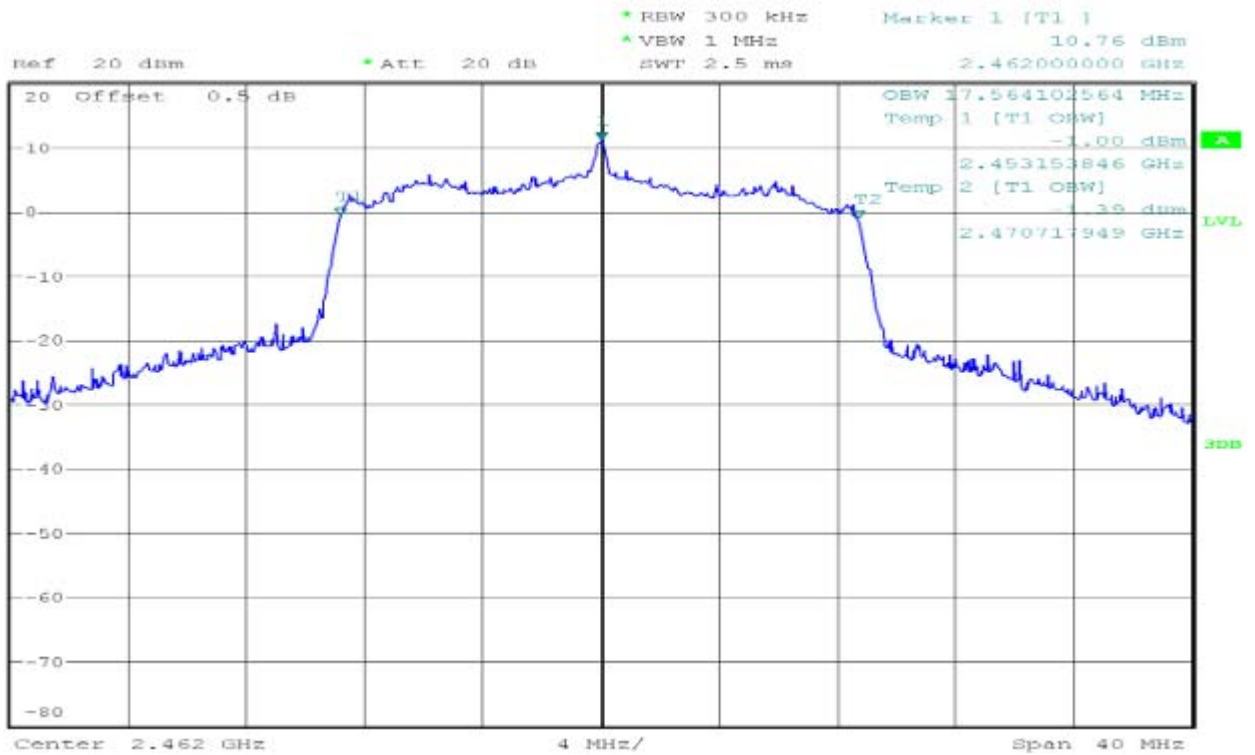


IEEE 802.11n20 MODE /Chain 1


99% Bandwidth (CH Low)

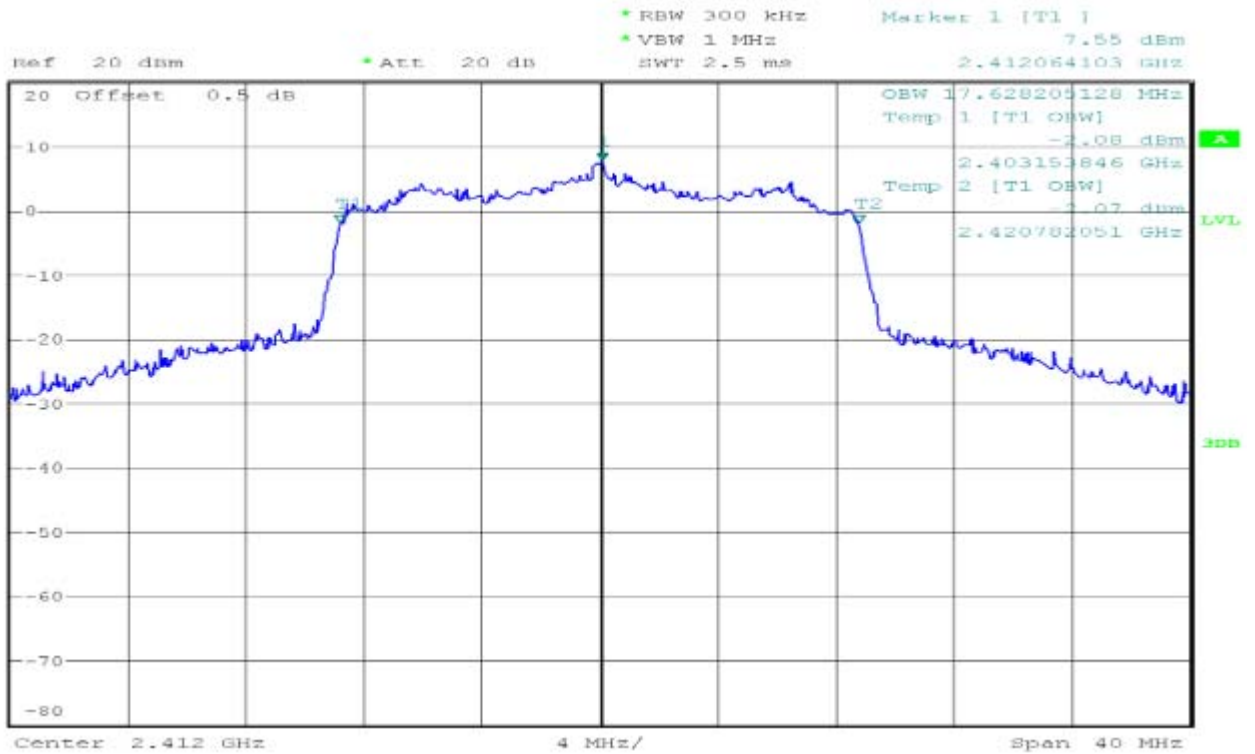

99% Bandwidth (CH Mid)

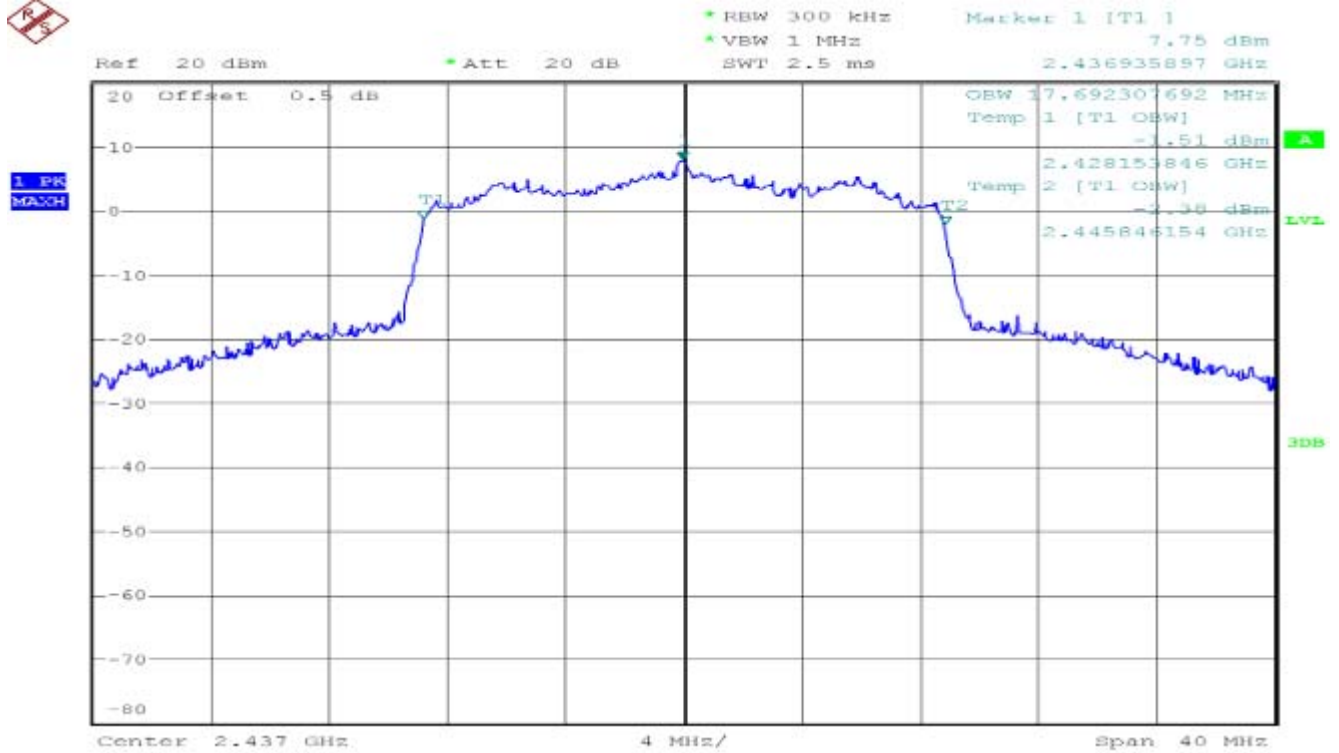


99% Bandwidth(CH High)

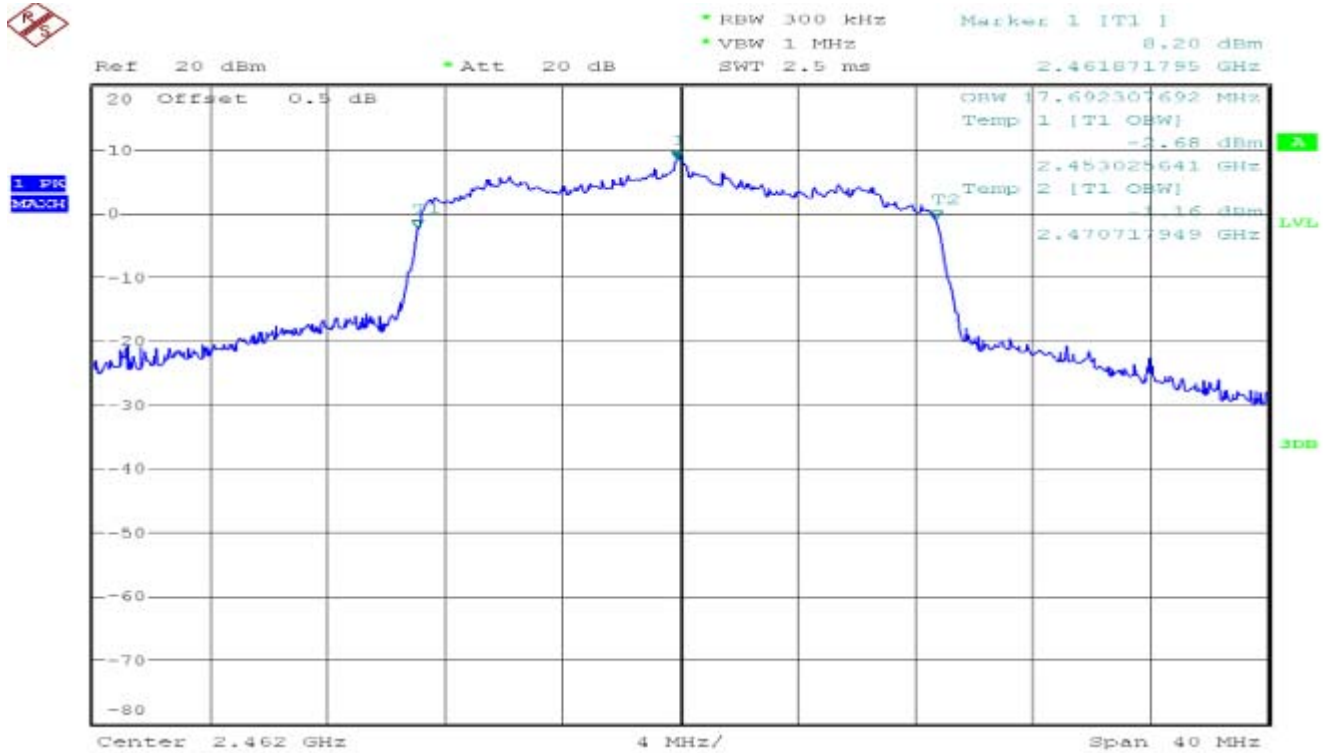


IEEE 802.11n40 MODE /Chain 0


99% Bandwidth (CH Low)

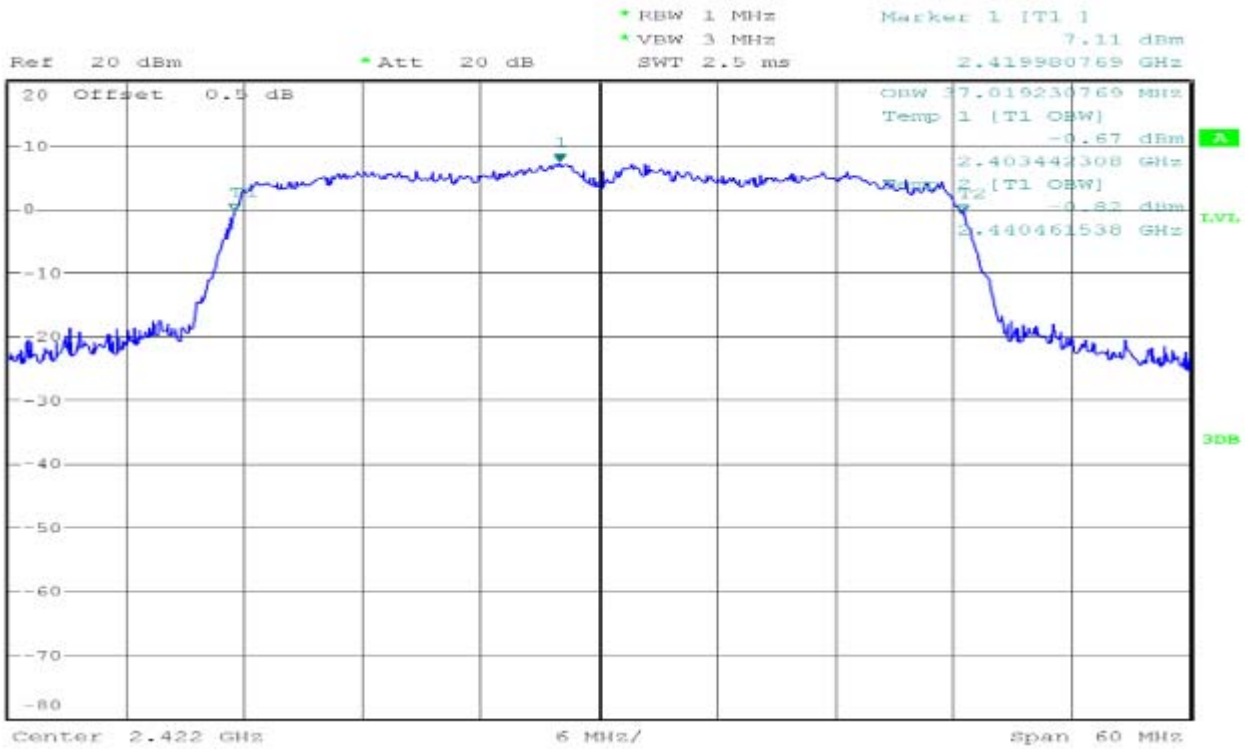

99% Bandwidth (CH Mid)

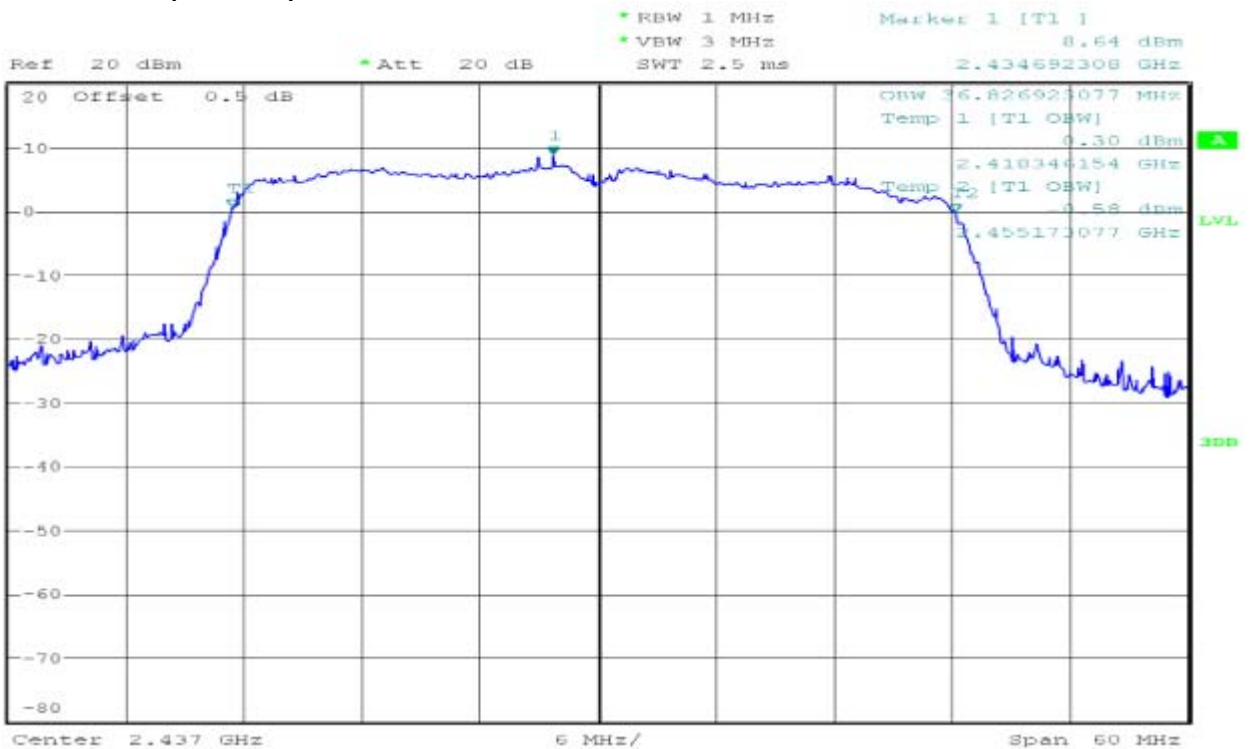


99% Bandwidth(CH High)

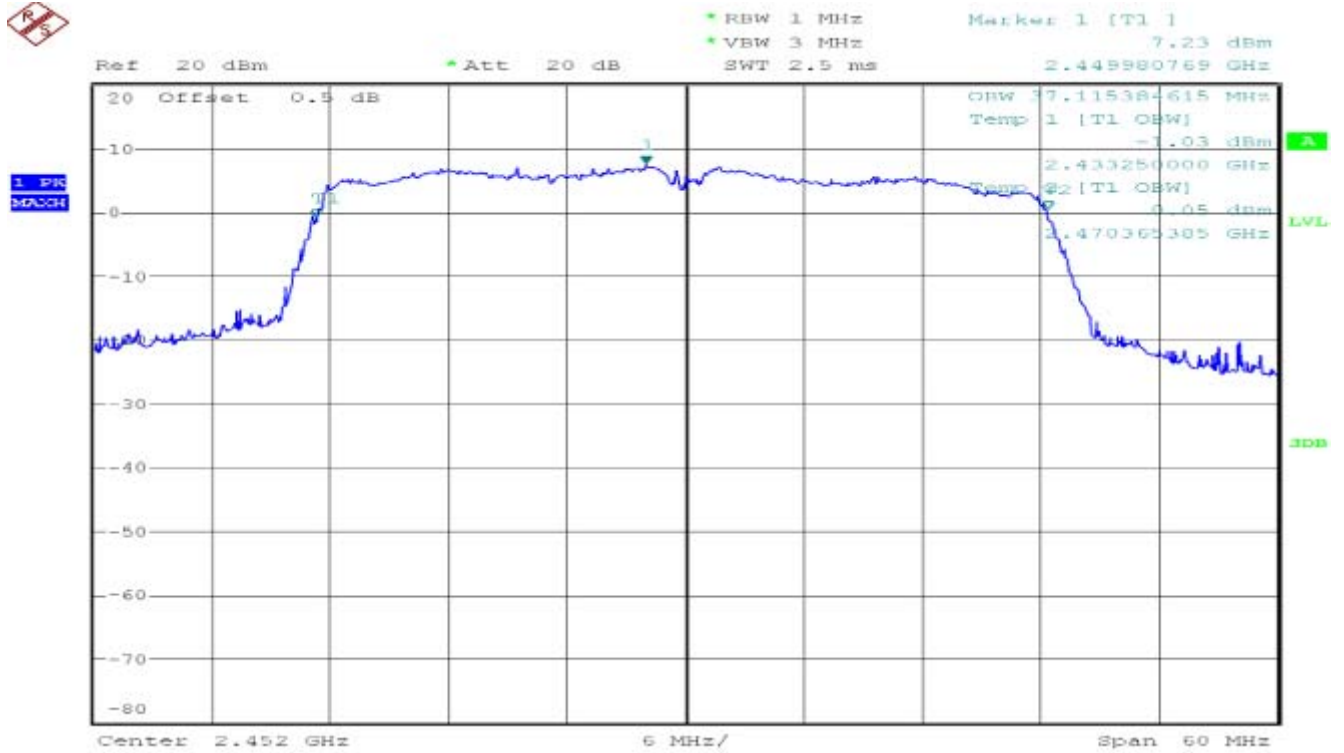


IEEE 802.11n40 MODE /Chain 1


99% Bandwidth (CH Low)

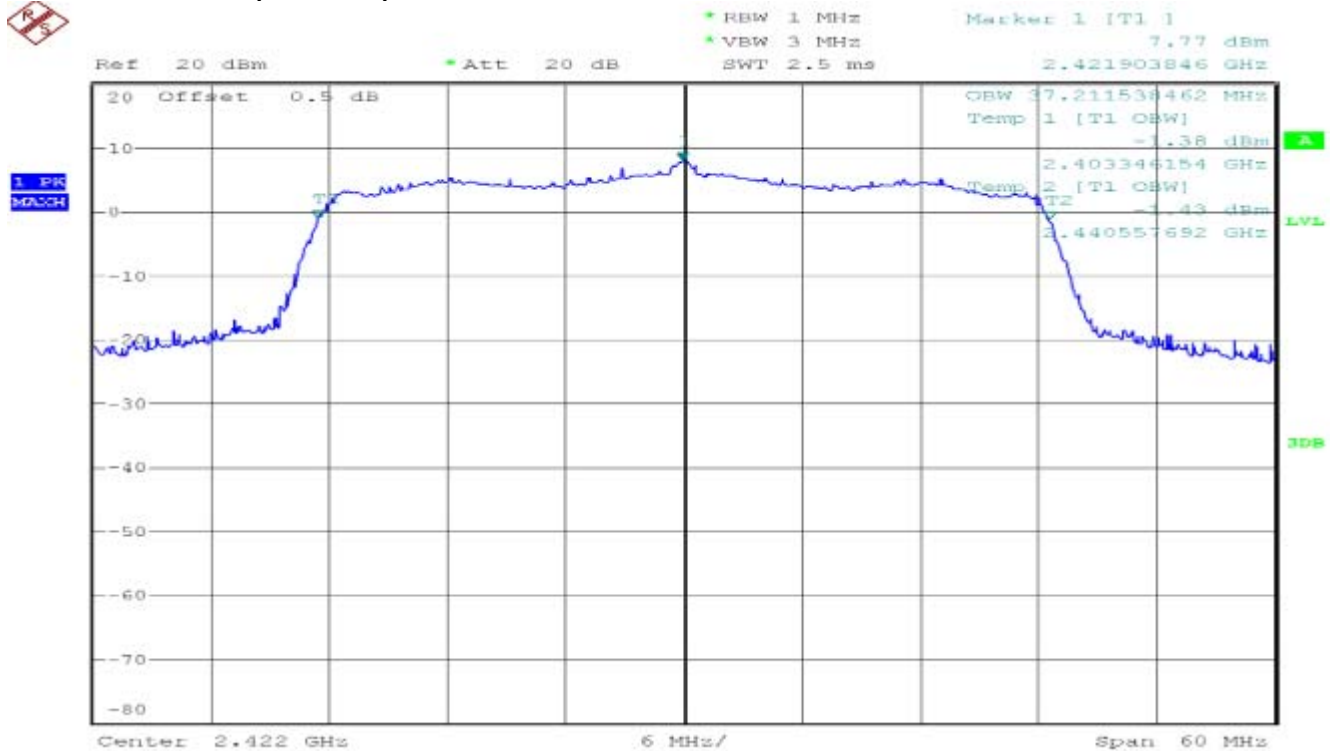

99% Bandwidth (CH Mid)

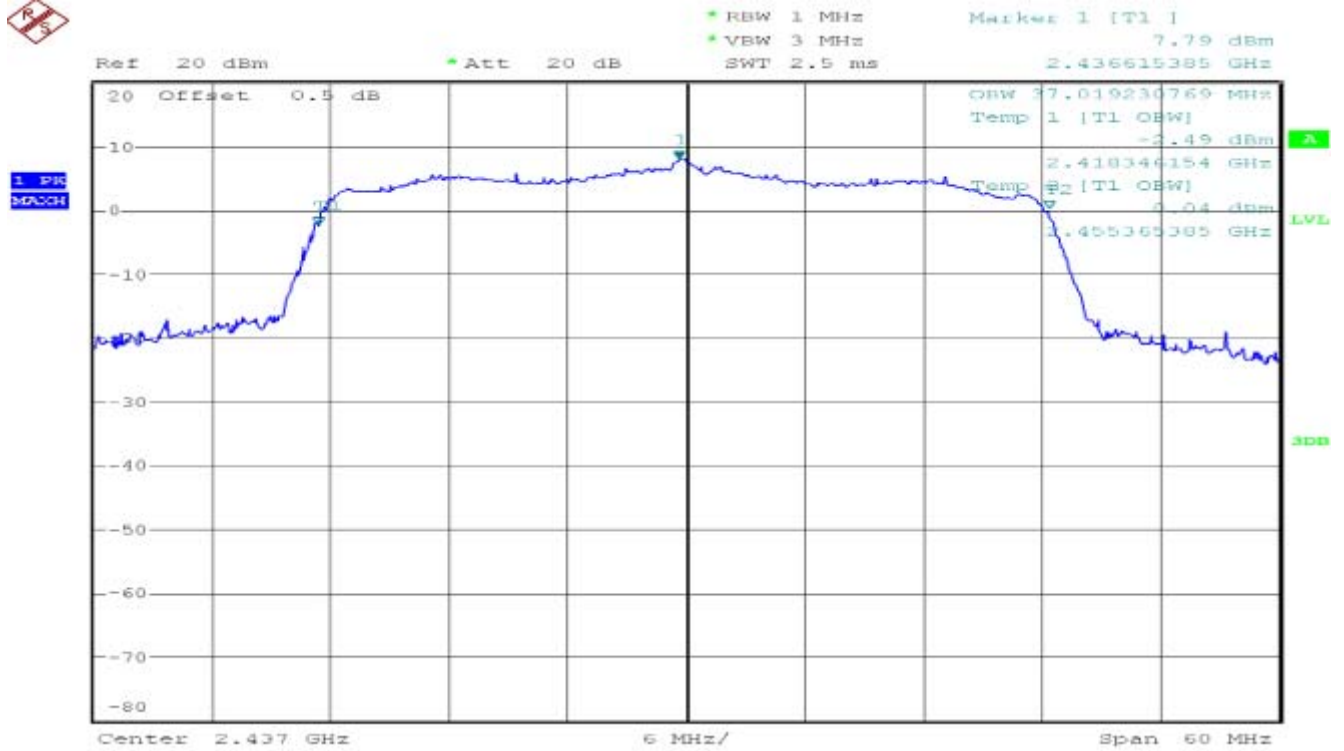

99% Bandwidth(CH High)

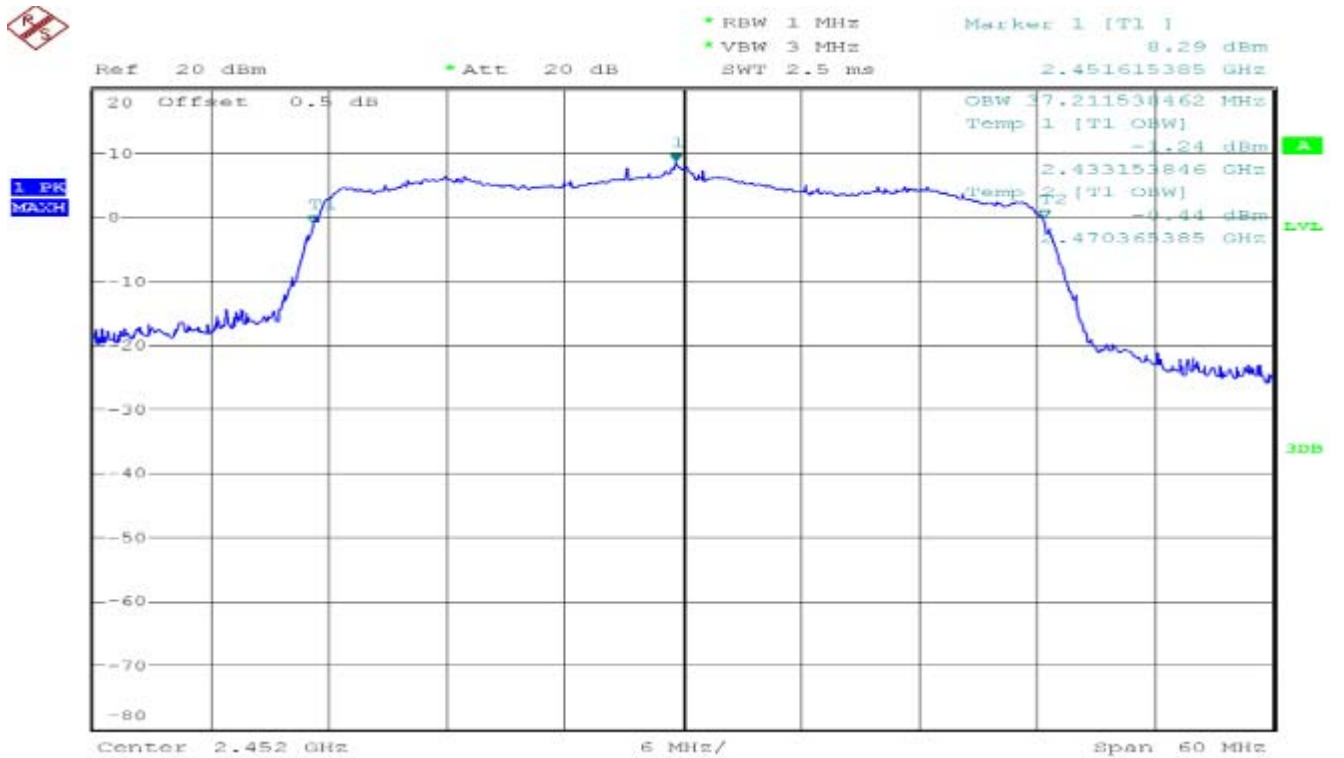


7.3. PEAK POWER

LIMIT

The maximum peak output power of the intentional radiator shall not exceed the following:

1. According to §15.247(b)(3), for systems using digital modulation in the bands of 902-928 MHz, and 2400-2483.5 MHz: 1 Watt.
2. According to §15.247(b)(4), the conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Test Configuration



TEST PROCEDURE

1. The EUT transmitter output is connected to the Power meter.
The Power meter is set to the peak power detection.
2. The testing follows the Measurement Procedure FCC KDB No. 558074 D01 DTS Meas. Guidance v04. 9.1.3 PKPM1 Peak-reading power meter method.

TEST RESULTS

No non-compliance noted

Test Data

Test mode: IEEE 802.11b mode

| Channel | Frequency (MHz) | Chain 0 Output Power (dBm) | Chain 1 Output Power (dBm) | Chain 0 Limit* (dBm) | Chain 1 Limit (dBm) |
|---------|-----------------|----------------------------|----------------------------|----------------------|---------------------|
| Low | 2412 | 20.15 | 18.96 | 29.37 | 30 |
| Mid | 2437 | 20.39 | 19.45 | 29.37 | 30 |
| High | 2462 | 20.19 | 20.29 | 29.37 | 30 |

Test mode: IEEE 802.11g mode

| Channel | Frequency (MHz) | Chain 0 Output Power (dBm) | Chain 1 Output Power (dBm) | Chain 0 Limit* (dBm) | Chain 1 Limit (dBm) |
|---------|-----------------|----------------------------|----------------------------|----------------------|---------------------|
| Low | 2412 | 21.87 | 21.74 | 29.37 | 30 |
| Mid | 2437 | 22.49 | 22.23 | 29.37 | 30 |
| High | 2462 | 23.19 | 23.41 | 29.37 | 30 |

Test mode: IEEE 802.11n HT20 mode

| Channel | Frequency (MHz) | Chain 0 Output Power (dBm) | Chain 1 Output Power (dBm) | Total Maximum Conducted Output Power (dBm) | Limit** (dBm) |
|---------|-----------------|----------------------------|----------------------------|--------------------------------------------|---------------|
| Low | 2412 | 21.45 | 21.12 | 24.30 | 27.17 |
| Mid | 2437 | 21.89 | 21.75 | 24.83 | 27.17 |
| High | 2462 | 22.87 | 23.00 | 25.95 | 27.17 |

Test mode: IEEE 802.11n HT40 mode

| Channel | Frequency (MHz) | Chain 0 Output Power (dBm) | Chain 1 Output Power (dBm) | Total Maximum Conducted Output Power (dBm) | Limit** (dBm) |
|---------|-----------------|----------------------------|----------------------------|--------------------------------------------|---------------|
| Low | 2422 | 19.96 | 19.89 | 22.94 | 27.17 |
| Mid | 2437 | 20.96 | 20.30 | 23.65 | 27.17 |
| High | 2452 | 20.90 | 21.23 | 24.08 | 27.17 |

Remark: 1.Limit*=30dBm-(Antenna 1 Gain-6)=30dBm-(6.63-6)dB=29.37dBm

2.Limit**=30dBm-(Total Gain -6)=30dBm-(8.83-6)dB=27.17dBm


3.Total Output Power (dBm) = $10 \cdot \text{LOG}(10^{(\text{Chain 0 Output Power} / 10)} + 10^{(\text{Chain 1 Output Power} / 10)})$

7.4. PEAK POWER SPECTRAL DENSITY

LIMIT

1. According to §15.247(e), for digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.
2. According to §15.247(f), the digital modulation operation of the hybrid system, with the frequency hopping turned off, shall comply with the power density requirements of paragraph (d) of this section.

Test Configuration



TEST PROCEDURE

1. Place the EUT on the table and set it in transmitting mode. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
2. Set the spectrum analyzer as RBW = 3 kHz, VBW = 10 kHz, Span = 1.5 times the DTS bandwidth, Sweep = auto
3. Record the max reading.
4. Repeat the above procedure until the measurements for all frequencies are completed.

TEST RESULTS

No non-compliance noted

Test Data

Test mode: IEEE 802.11b mode

| Channel | Frequency (MHz) | Chain 0 PPSD (dBm) | Chain 1 PPSD (dBm) | Limit (dBm) | Result |
|---------|-----------------|--------------------|--------------------|-------------|--------|
| Low | 2412 | -5.64 | -5.75 | 8.00 | PASS |
| Mid | 2437 | -6.22 | -6.25 | 8.00 | PASS |
| High | 2462 | -5.98 | -5.86 | 8.00 | PASS |

Test mode: IEEE 802.11g mode

| Channel | Frequency (MHz) | Chain 0 PPSD (dBm) | Chain 1 PPSD (dBm) | Limit (dBm) | Result |
|---------|-----------------|--------------------|--------------------|-------------|--------|
| Low | 2412 | -11.59 | -9.80 | 8.00 | PASS |
| Mid | 2437 | -9.77 | -9.97 | 8.00 | PASS |
| High | 2462 | -9.84 | -9.77 | 8.00 | PASS |

Test mode: IEEE 802.11n HT20 mode

| Channel | Frequency (MHz) | Chain 0 PPSD (dBm) | Chain 1 PPSD (dBm) | Total PPSD (dBm) | Limit (dBm) | Result |
|---------|-----------------|--------------------|--------------------|------------------|-------------|--------|
| Low | 2412 | -11.94 | -11.14 | -8.51 | 8.00 | PASS |
| Mid | 2437 | -10.58 | -10.62 | -7.59 | 8.00 | PASS |
| High | 2462 | -10.62 | -10.43 | -7.51 | 8.00 | PASS |

Test mode: IEEE 802.11n HT40 mode


| Channel | Frequency (MHz) | Chain 0 PPSD (dBm) | Chain 1 PPSD (dBm) | Total PPSD (dBm) | Limit (dBm) | Result |
|---------|-----------------|--------------------|--------------------|------------------|-------------|--------|
| Low | 2422 | -17.13 | -15.49 | -13.22 | 8.00 | PASS |
| Mid | 2437 | -15.24 | -16.80 | -12.94 | 8.00 | PASS |
| High | 2452 | -16.46 | -16.13 | -13.28 | 8.00 | PASS |

Remark: Total PPSD (dBm) = $10 * \text{LOG}(10^{(\text{Chain 0 PPSD} / 10)} + 10^{(\text{Chain 1 PPSD} / 10)})$


Test Plot

IEEE 802.11b mode/Chain 0


PPSD (CH Low)

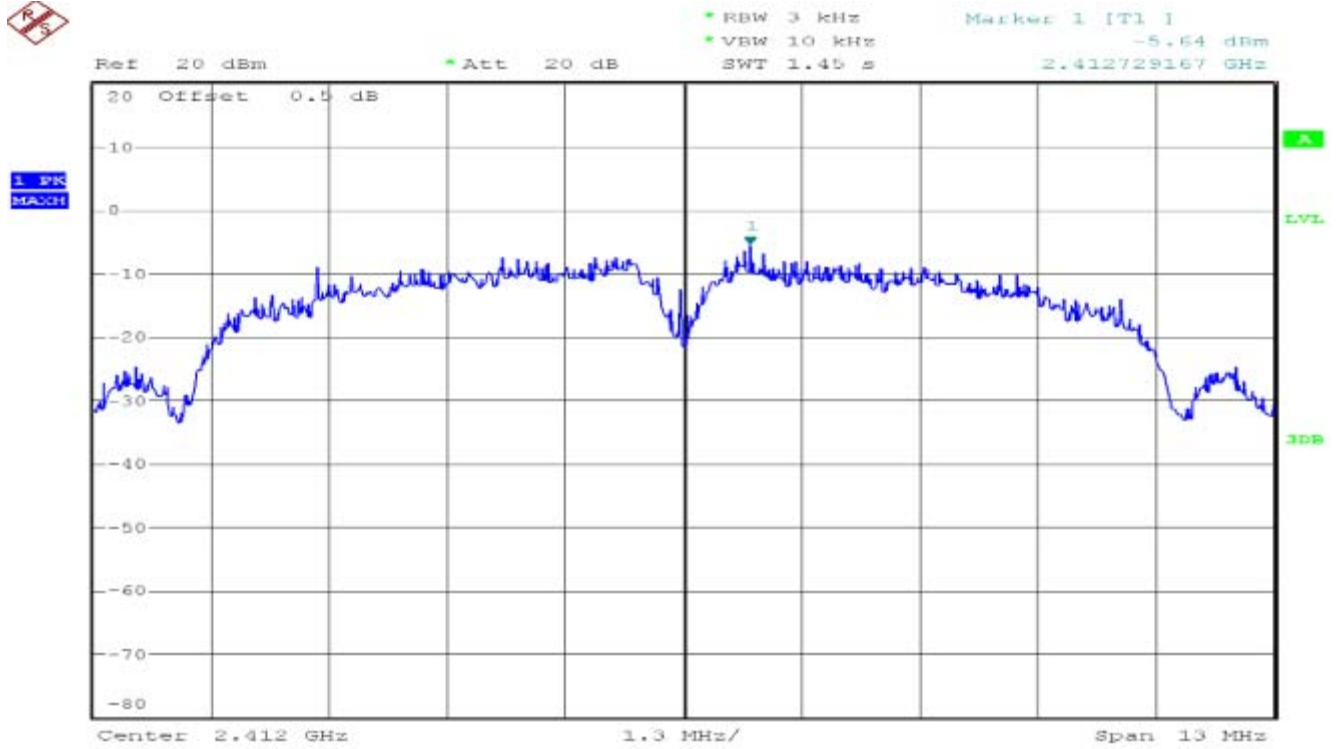

PPSD(CH Mid)

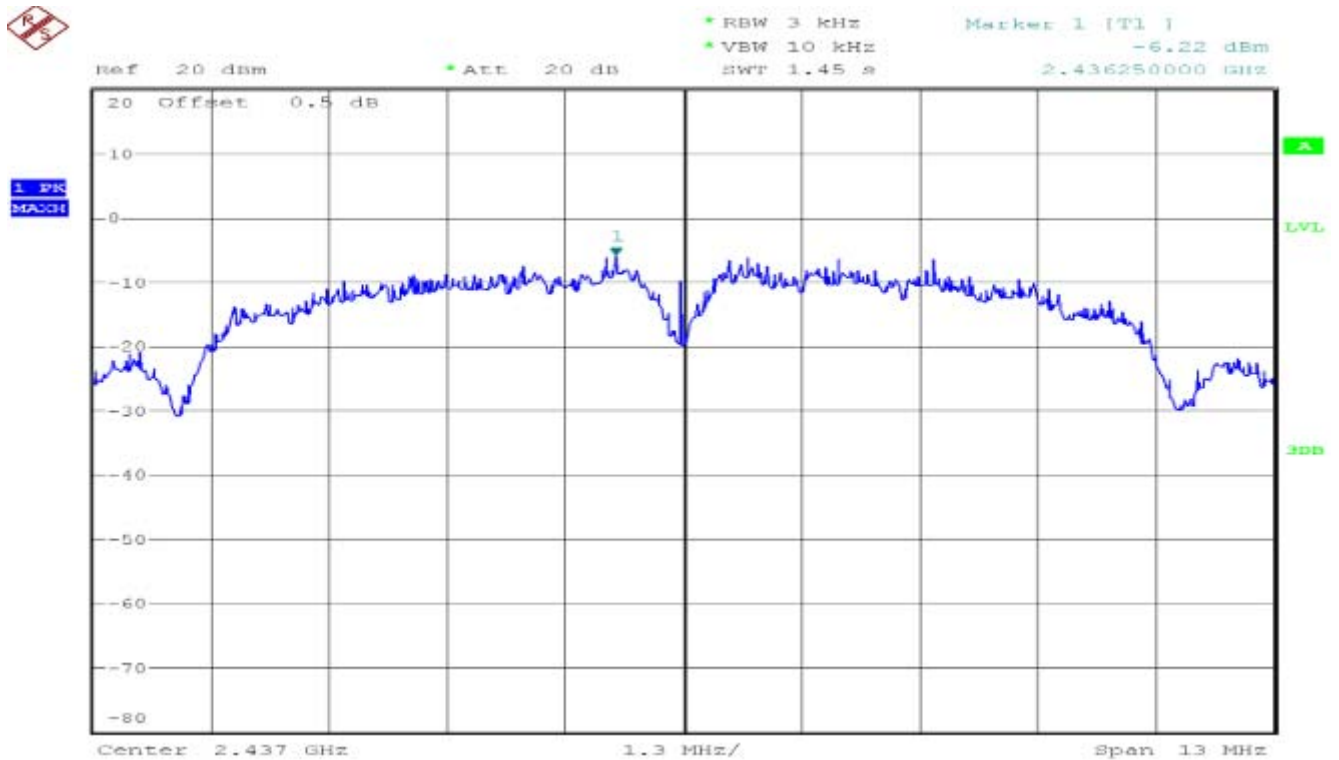


PPSD (CH High)

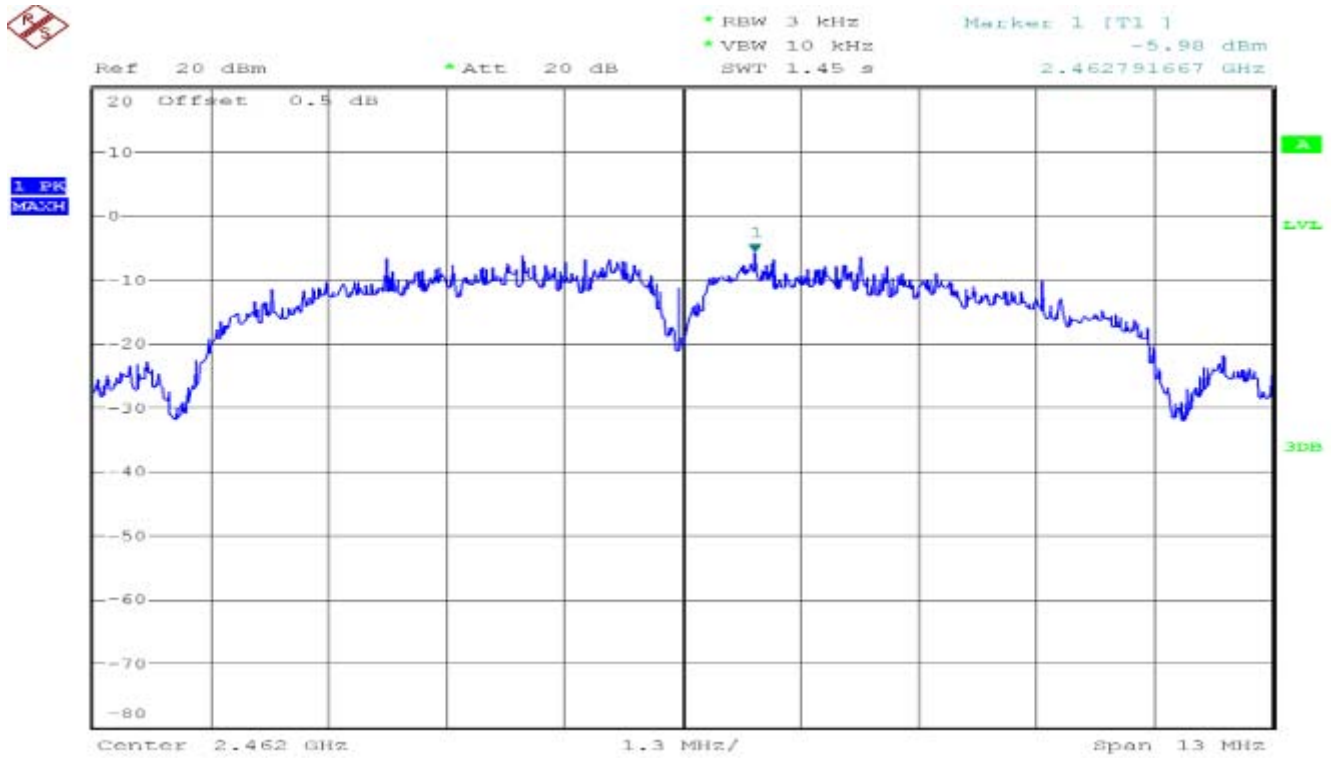


IEEE 802.11b mode/Chain 1


PPSD (CH Low)

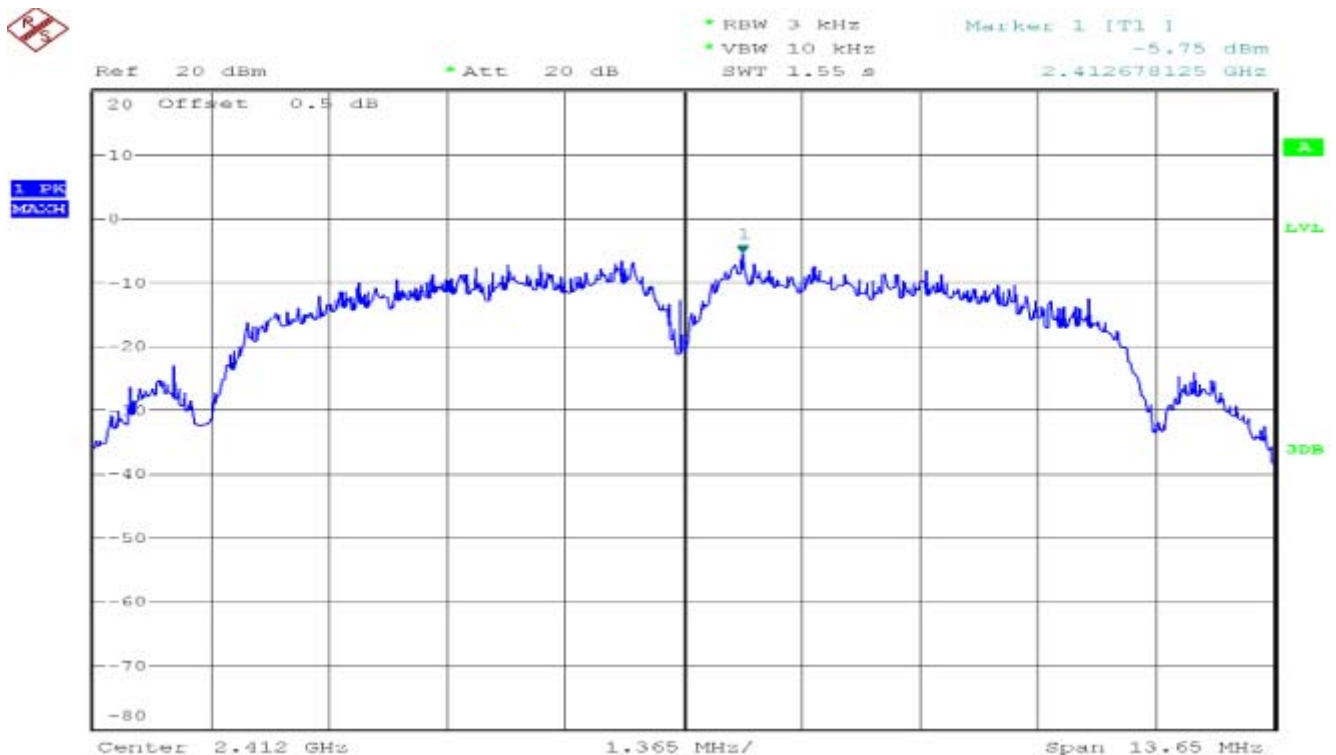

PPSD(CH Mid)

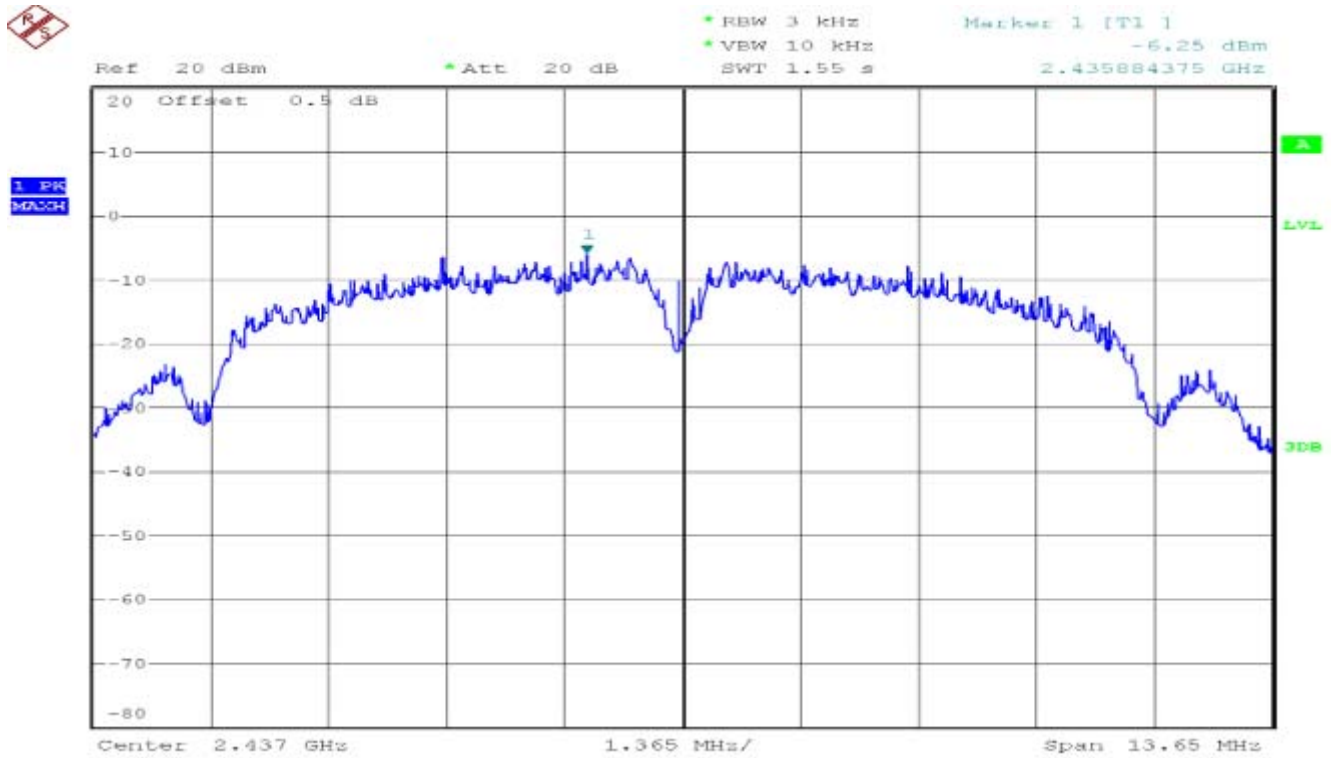


PPSD (CH High)

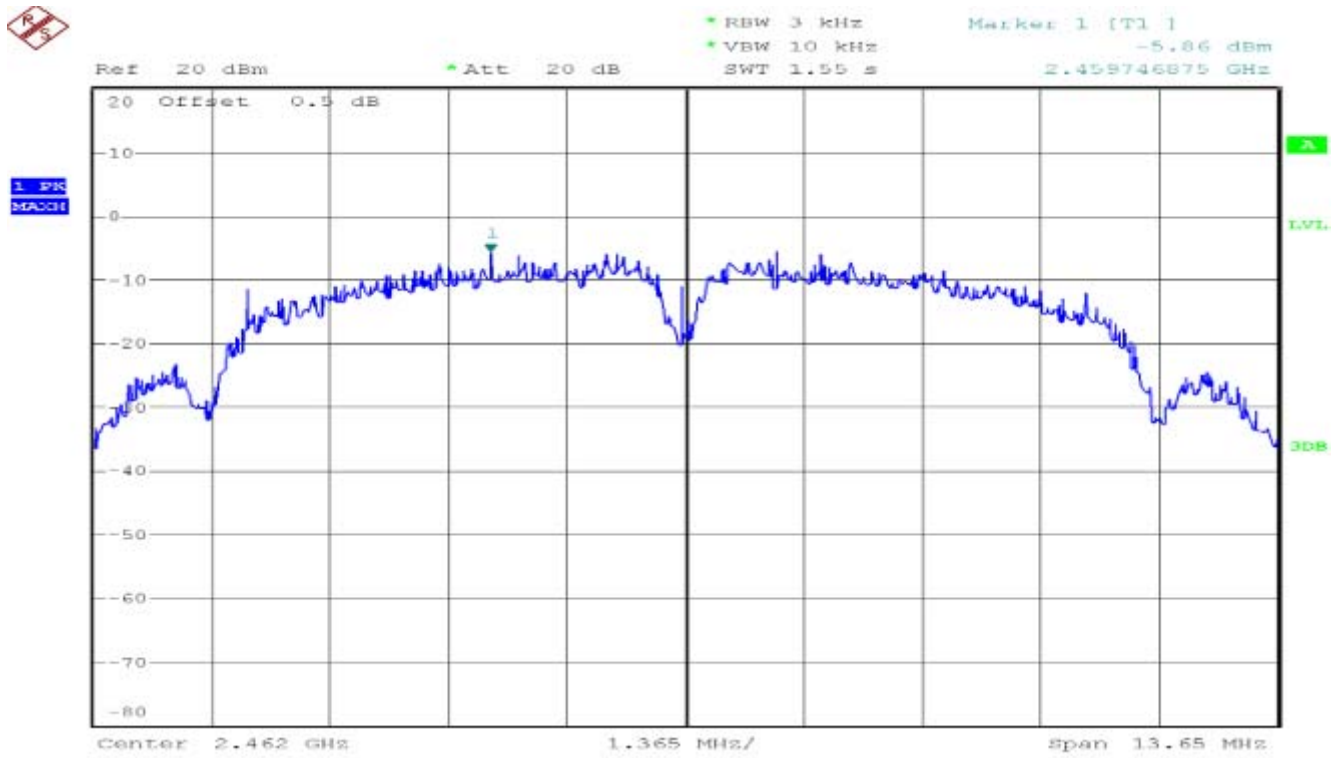


IEEE 802.11g mode/Chain 0


PPSD (CH Low)

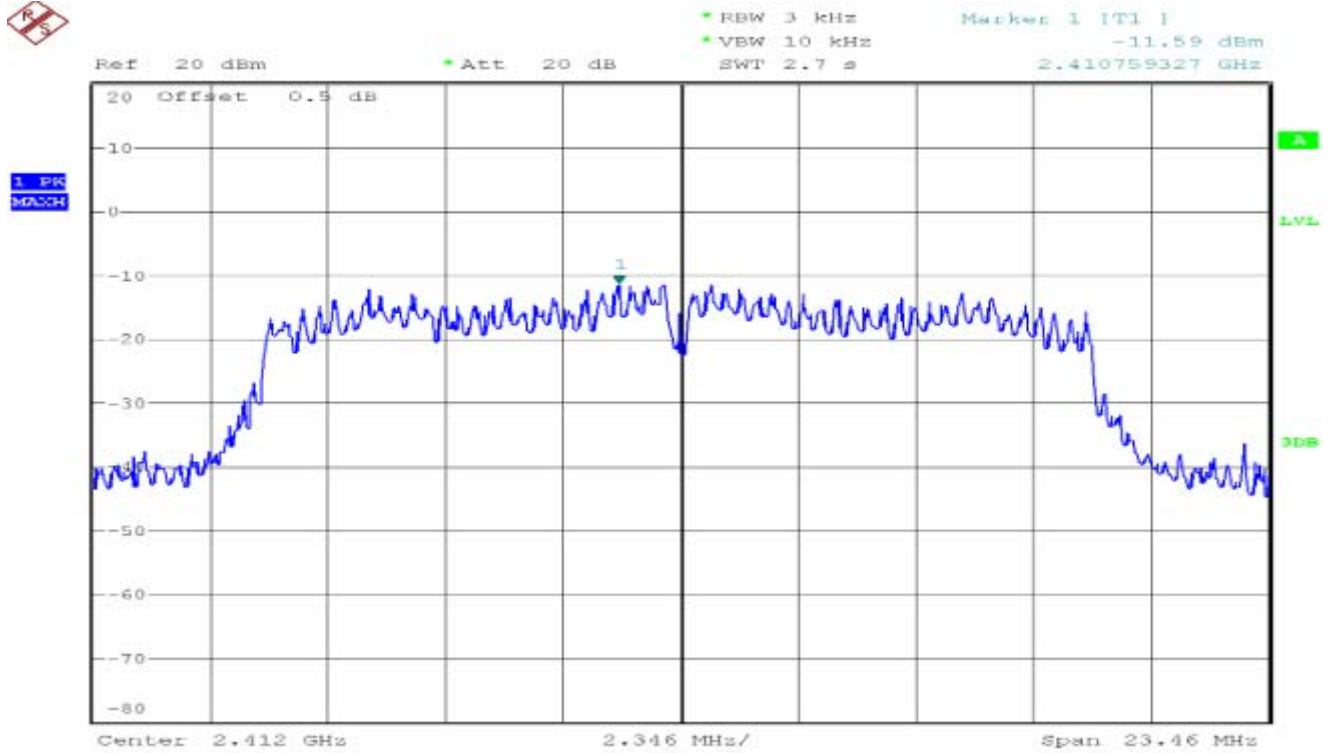

PPSD (CH Mid)

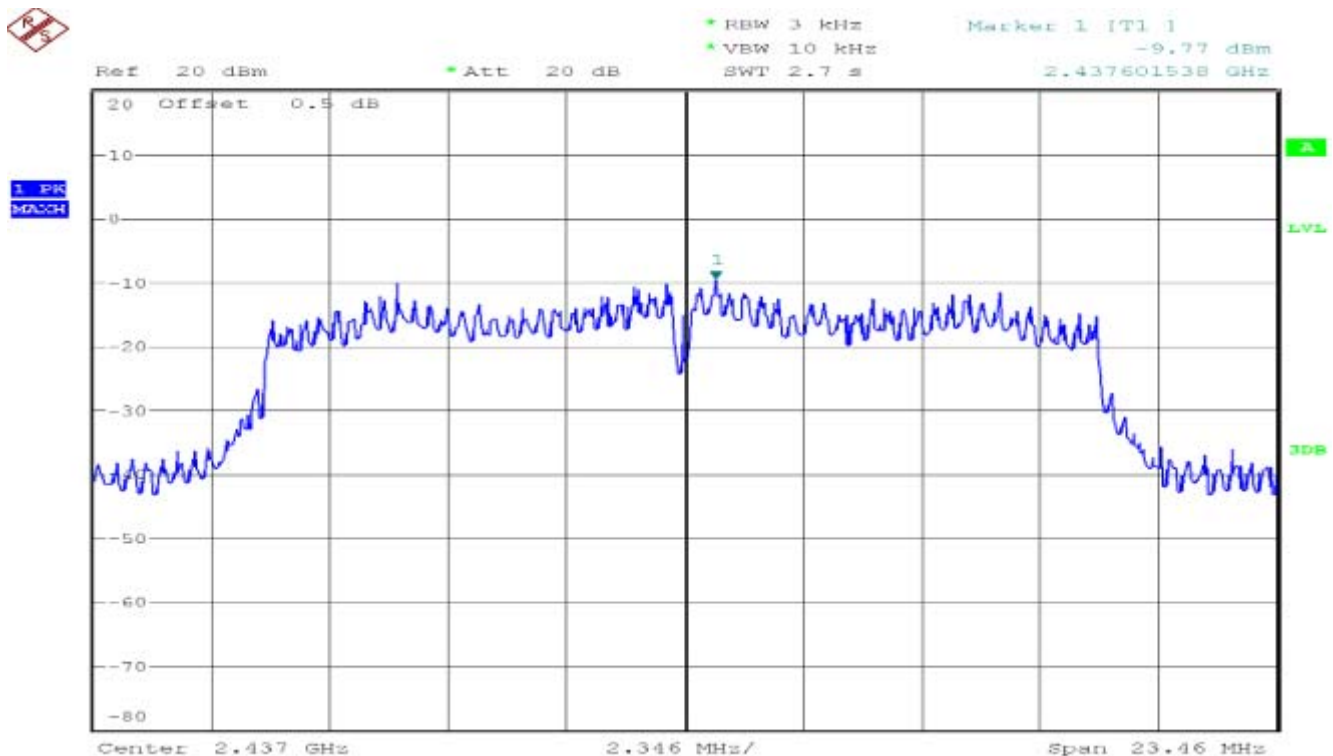


PPSD (CH High)

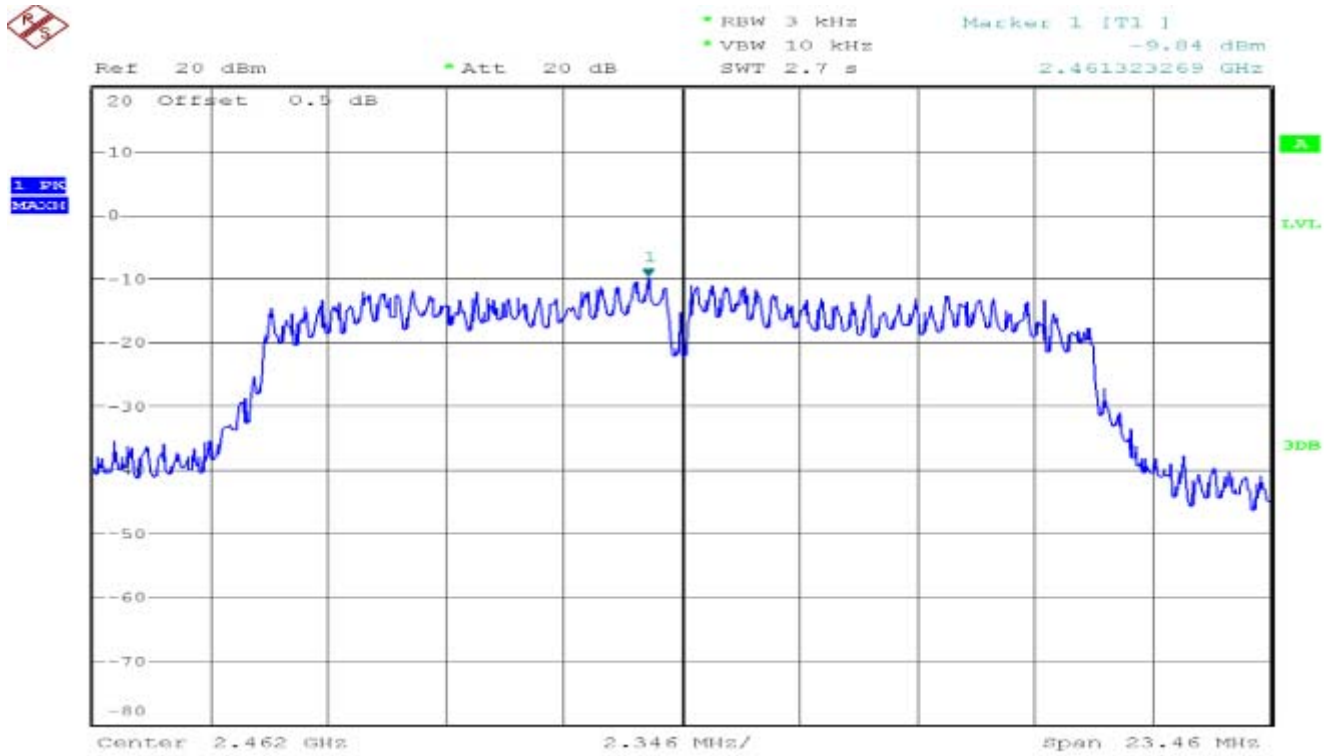


IEEE 802.11g mode/Chain 1


PPSD (CH Low)

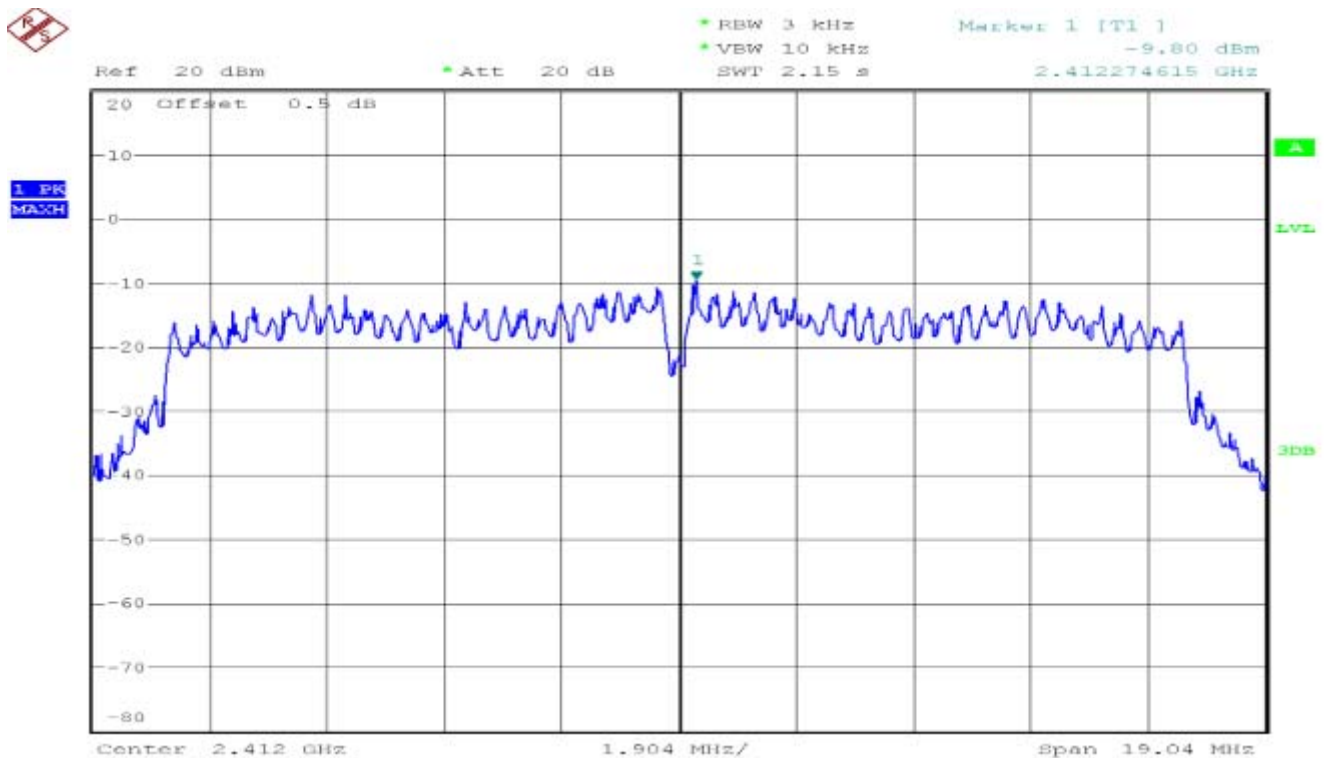

PPSD (CH Mid)

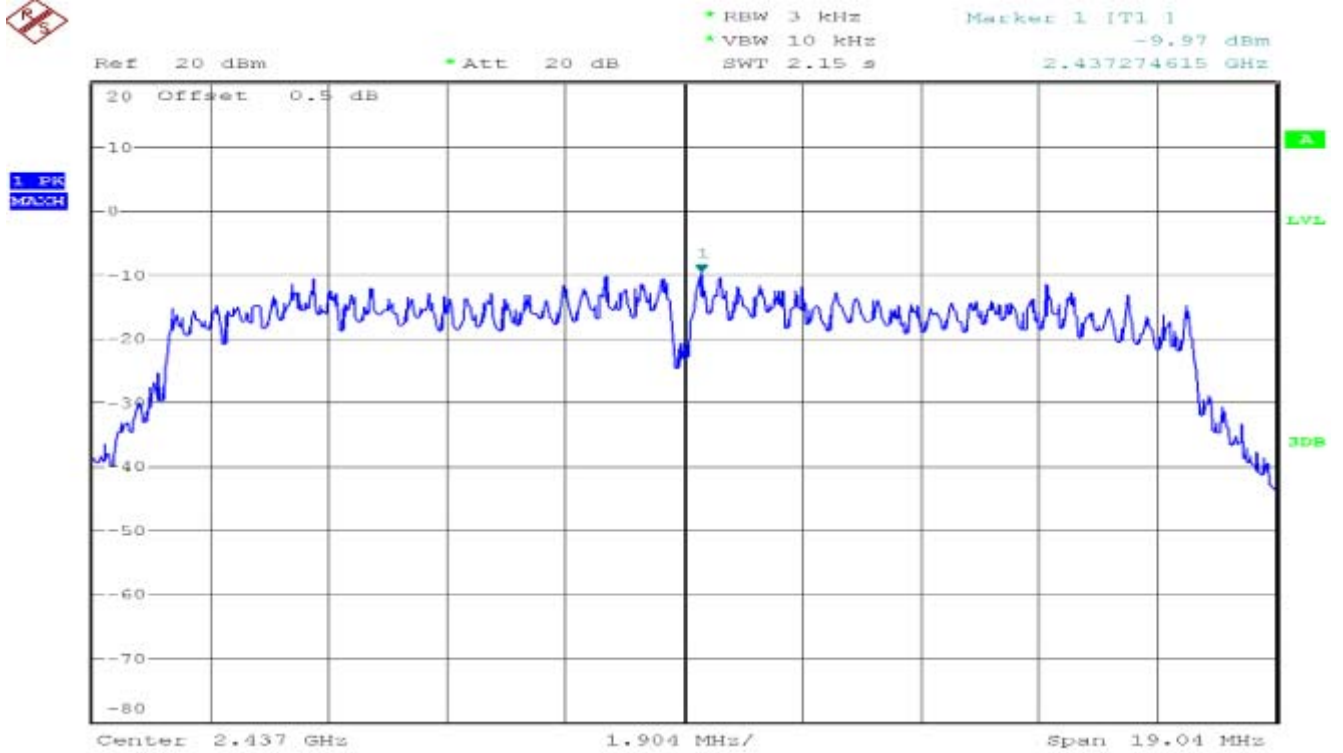


PPSD (CH High)

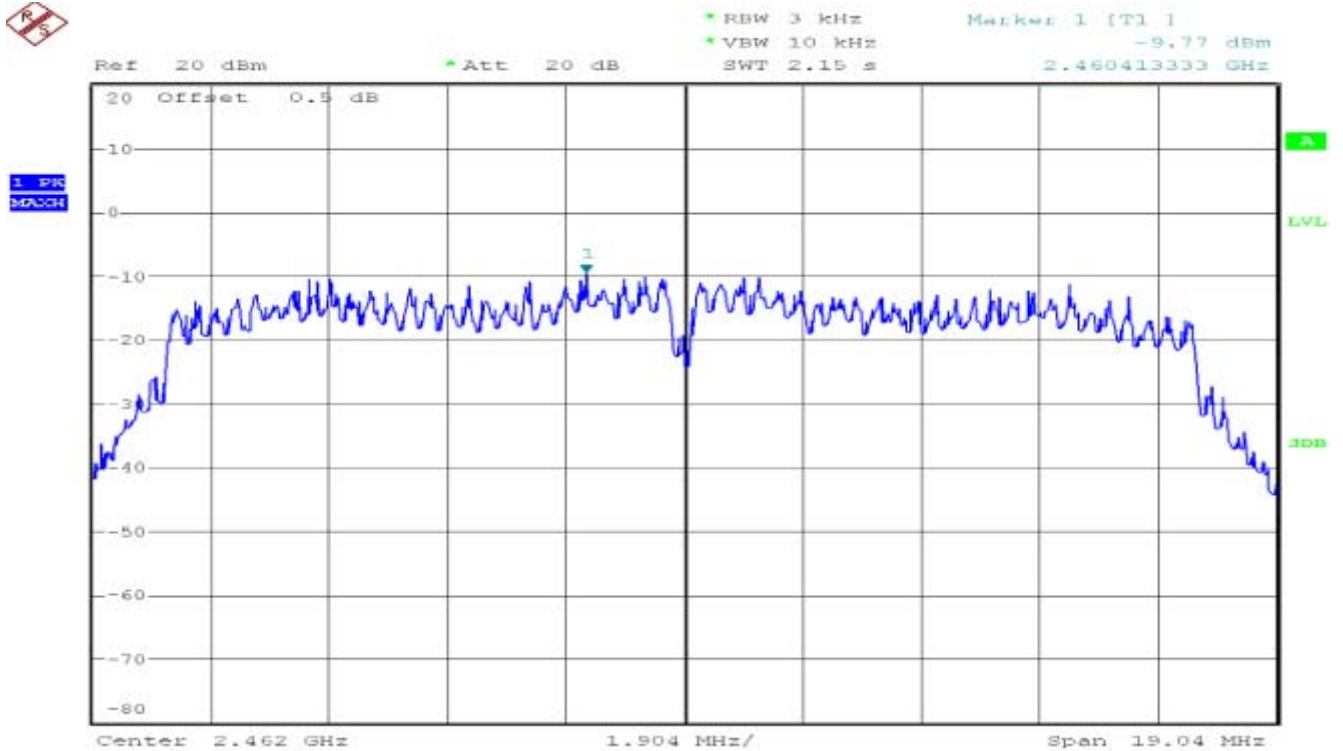


IEEE 802.11n HT20 mode/Chain 0


PPSD (CH Low)

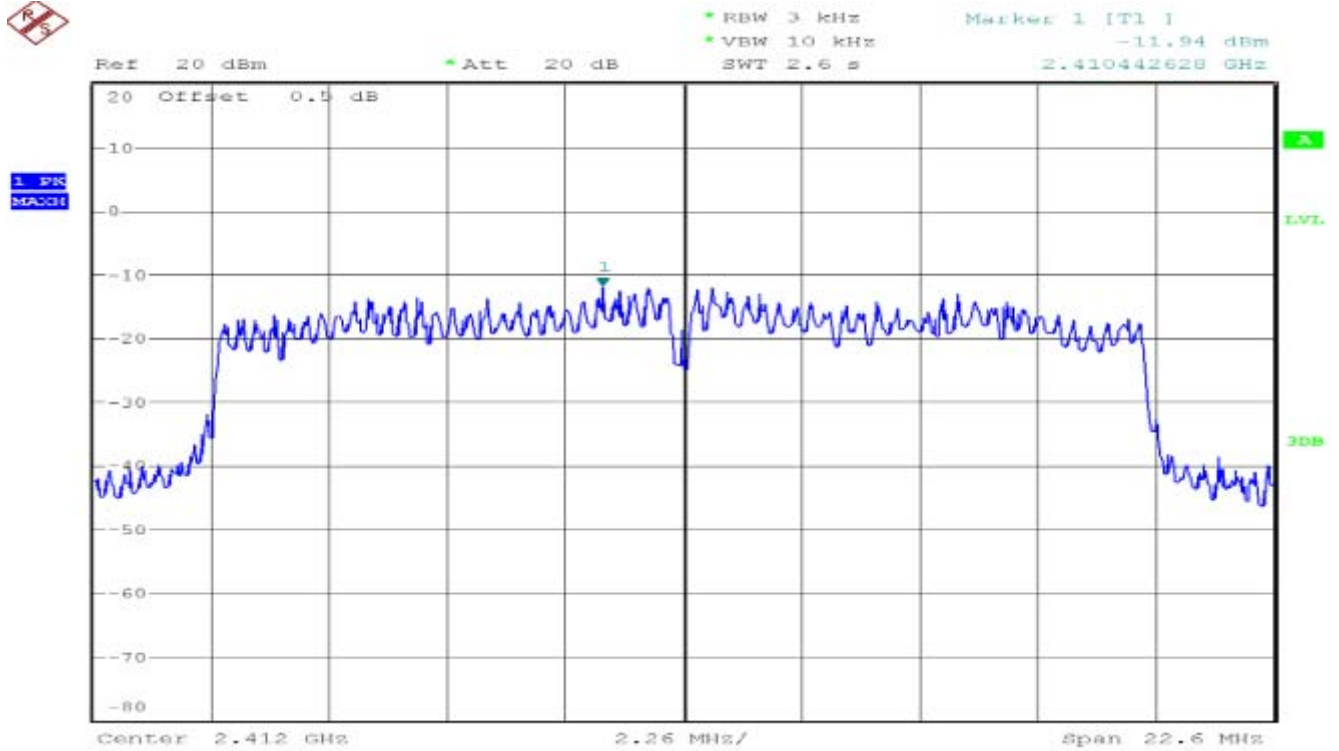

PPSD (CH Mid)

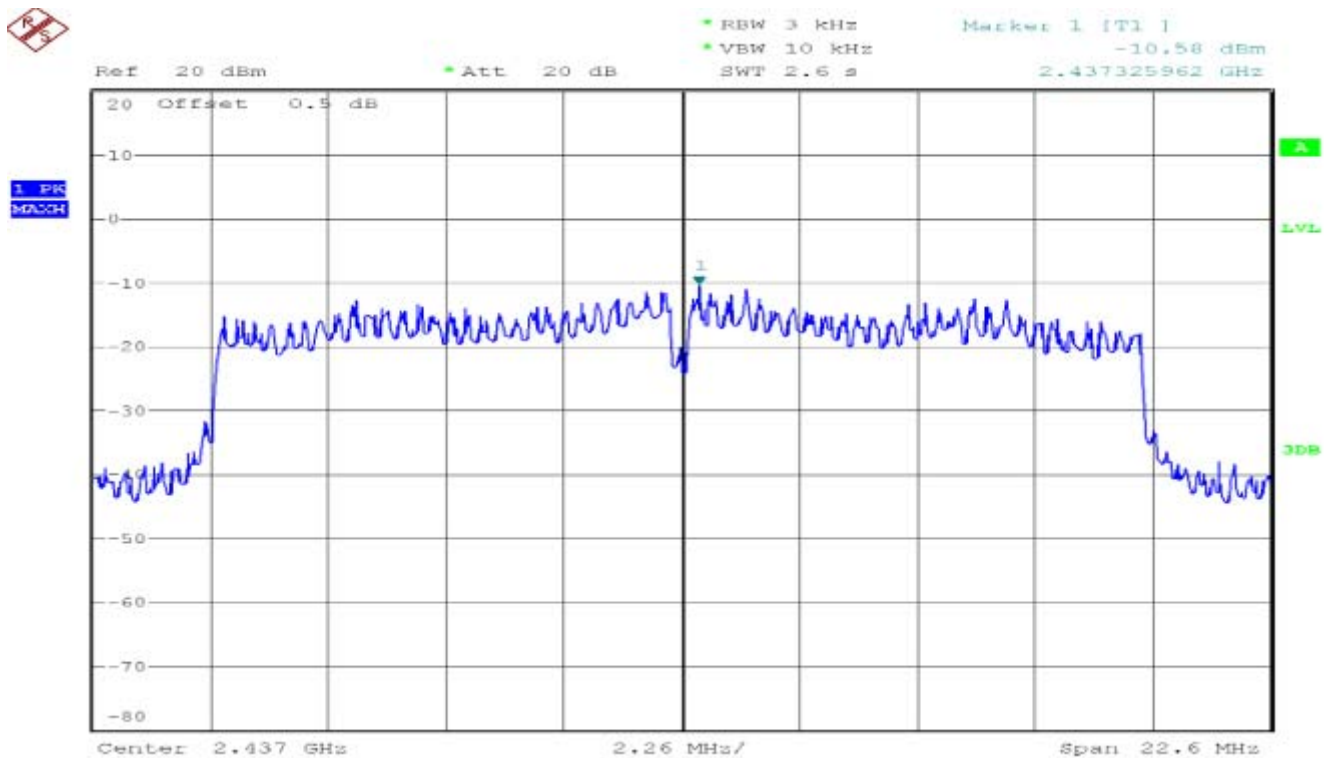


PPSD (CH High)

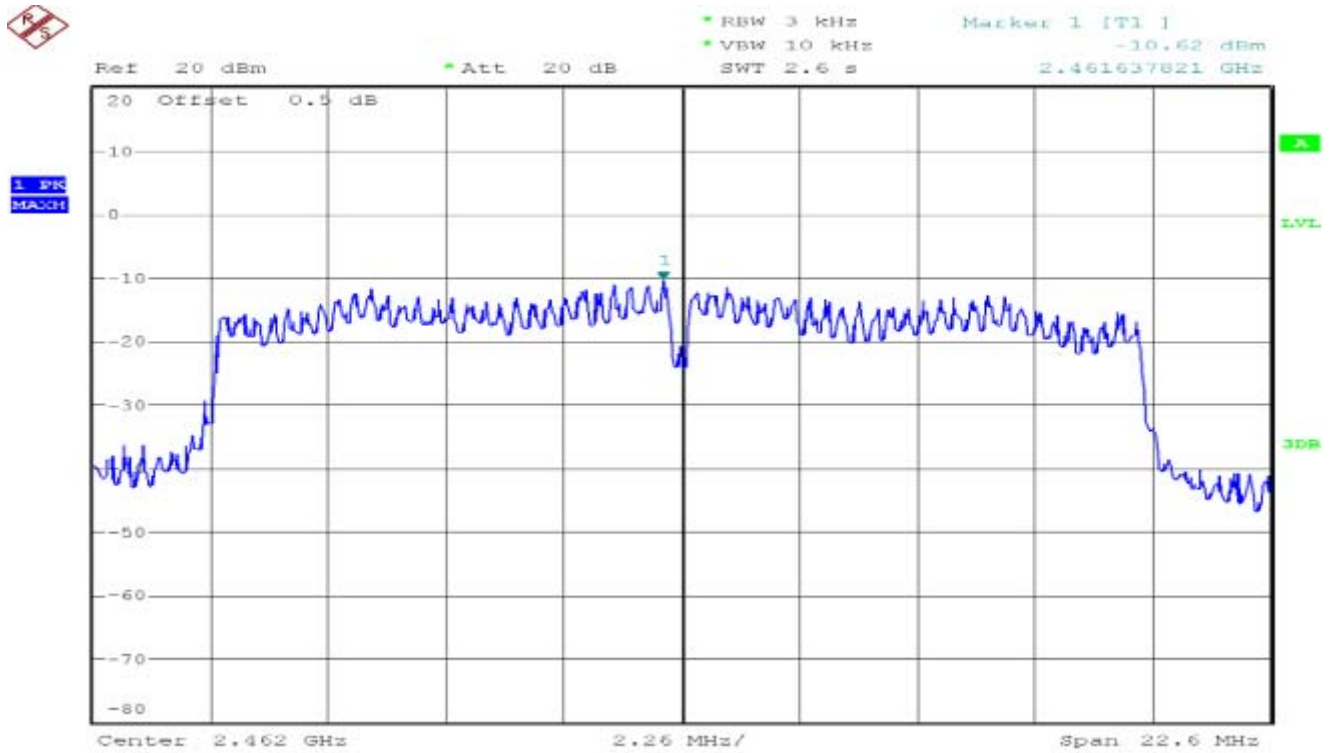


IEEE 802.11n HT20 mode/Chain 1


PPSD (CH Low)

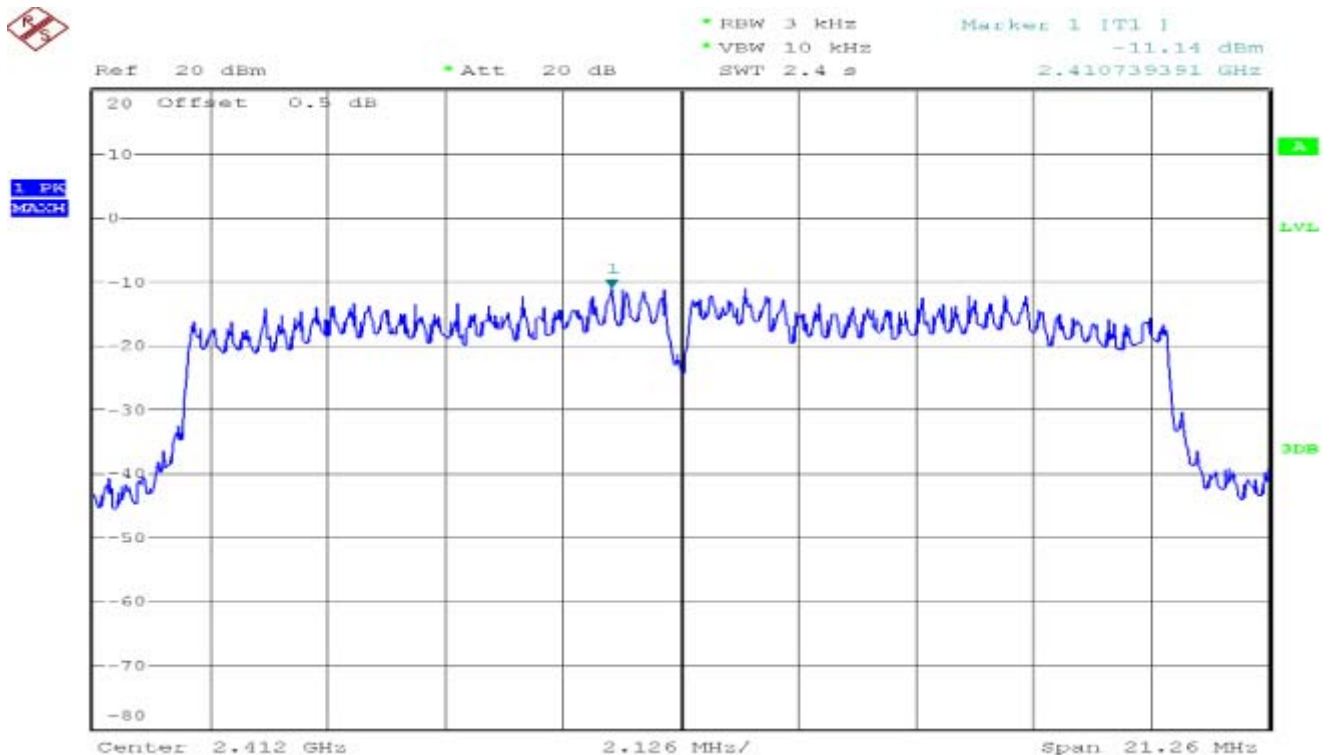

PPSD (CH Mid)

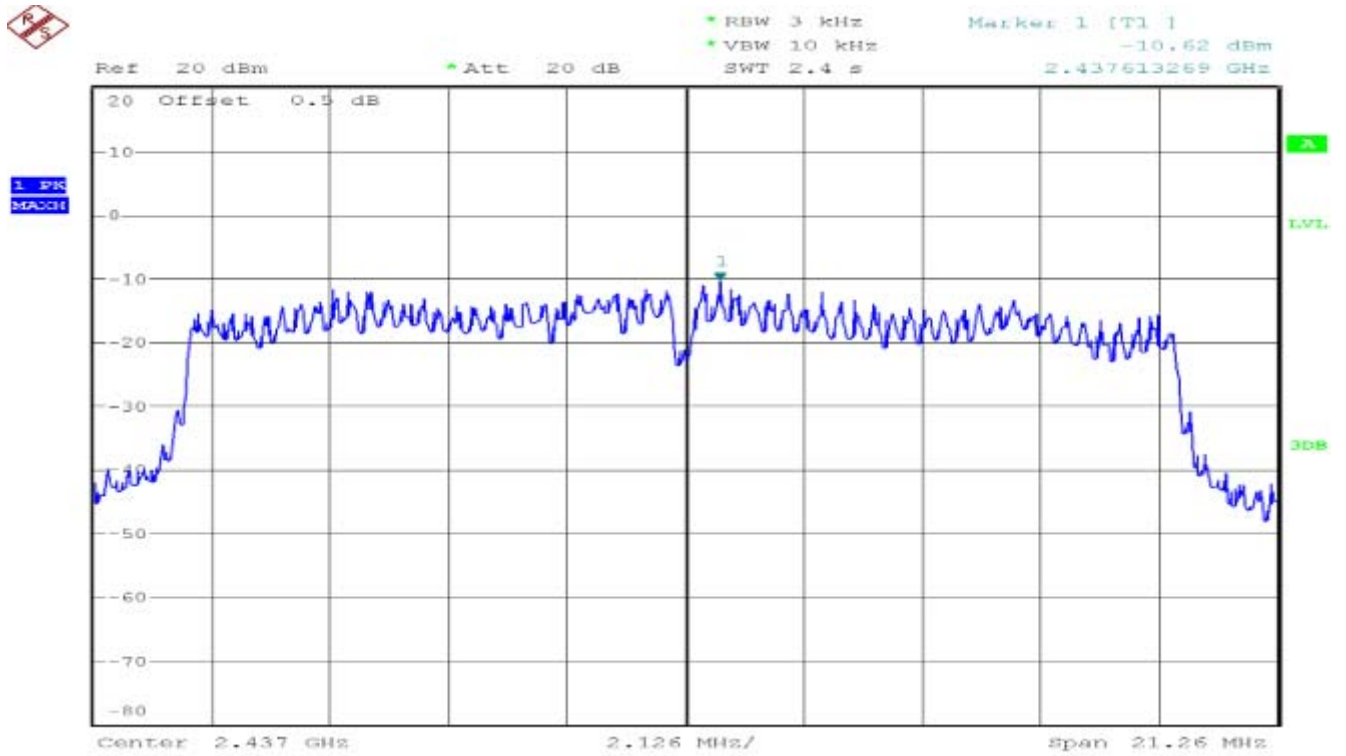


PPSD (CH High)

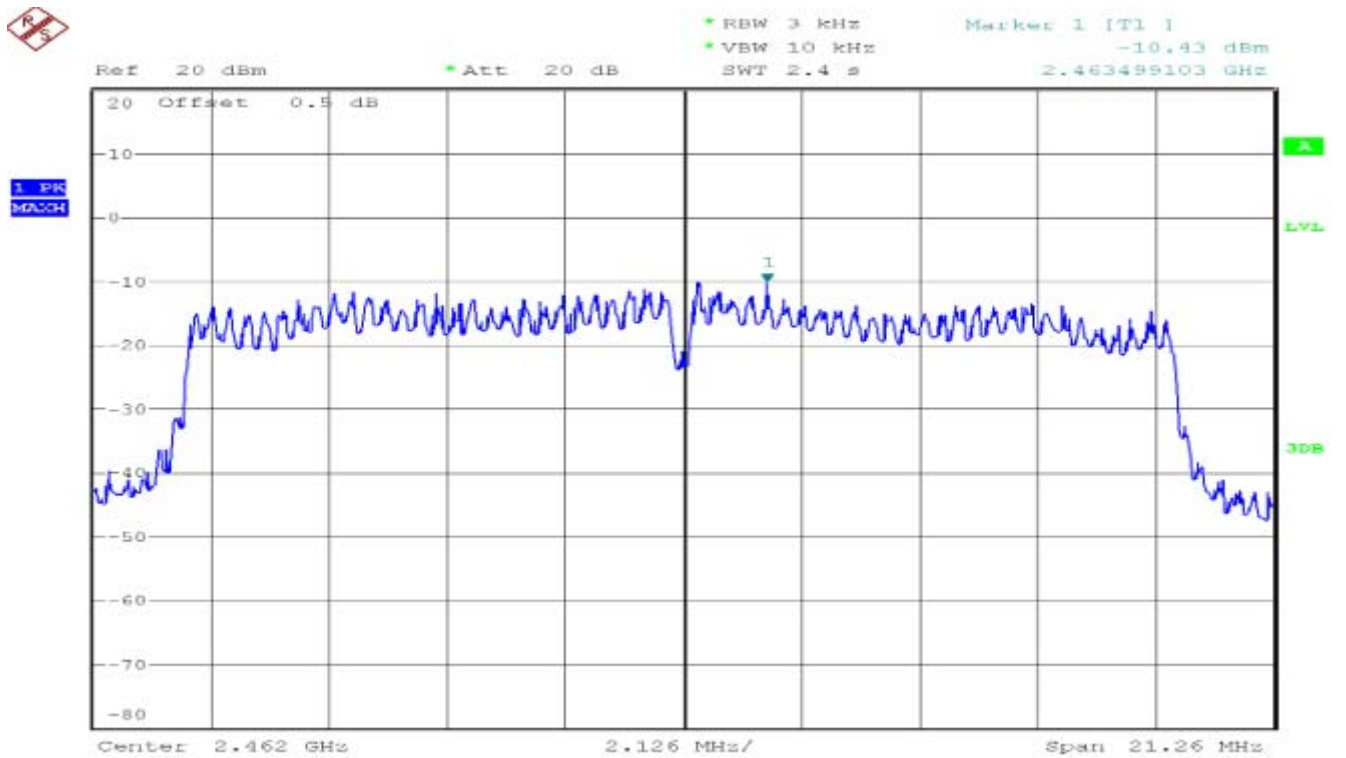


IEEE 802.11n HT40 mode/Chain 0


PPSD (CH Low)

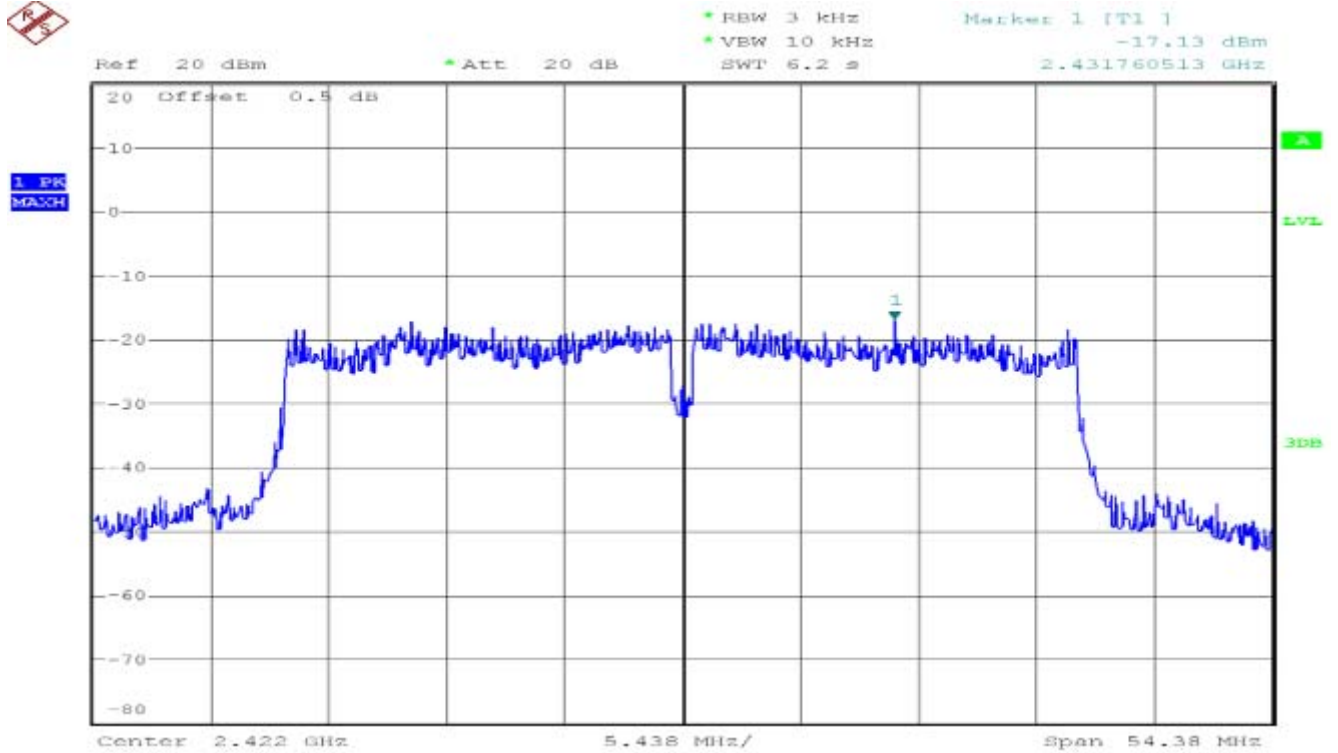

PPSD (CH Mid)

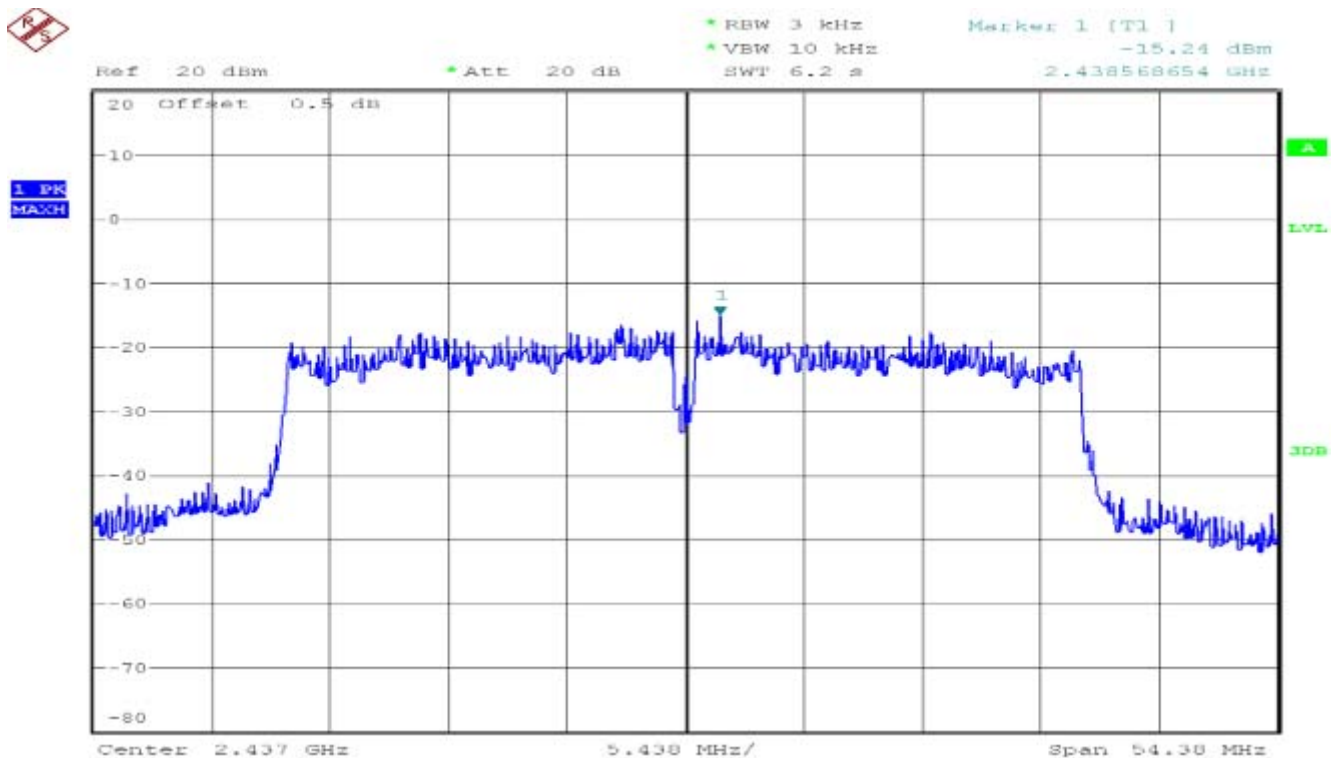


PPSD (CH High)

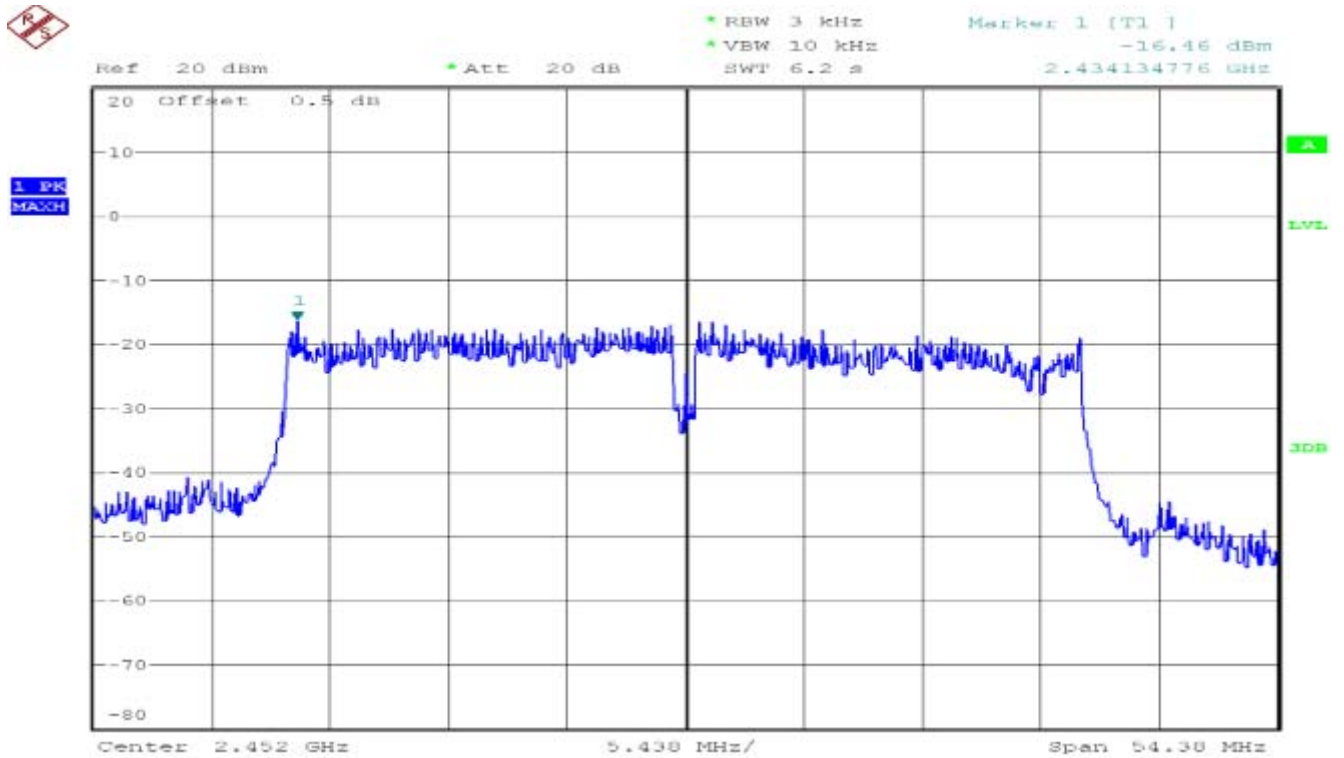


IEEE 802.11n HT40 mode/Chain 1


PPSD (CH Low)

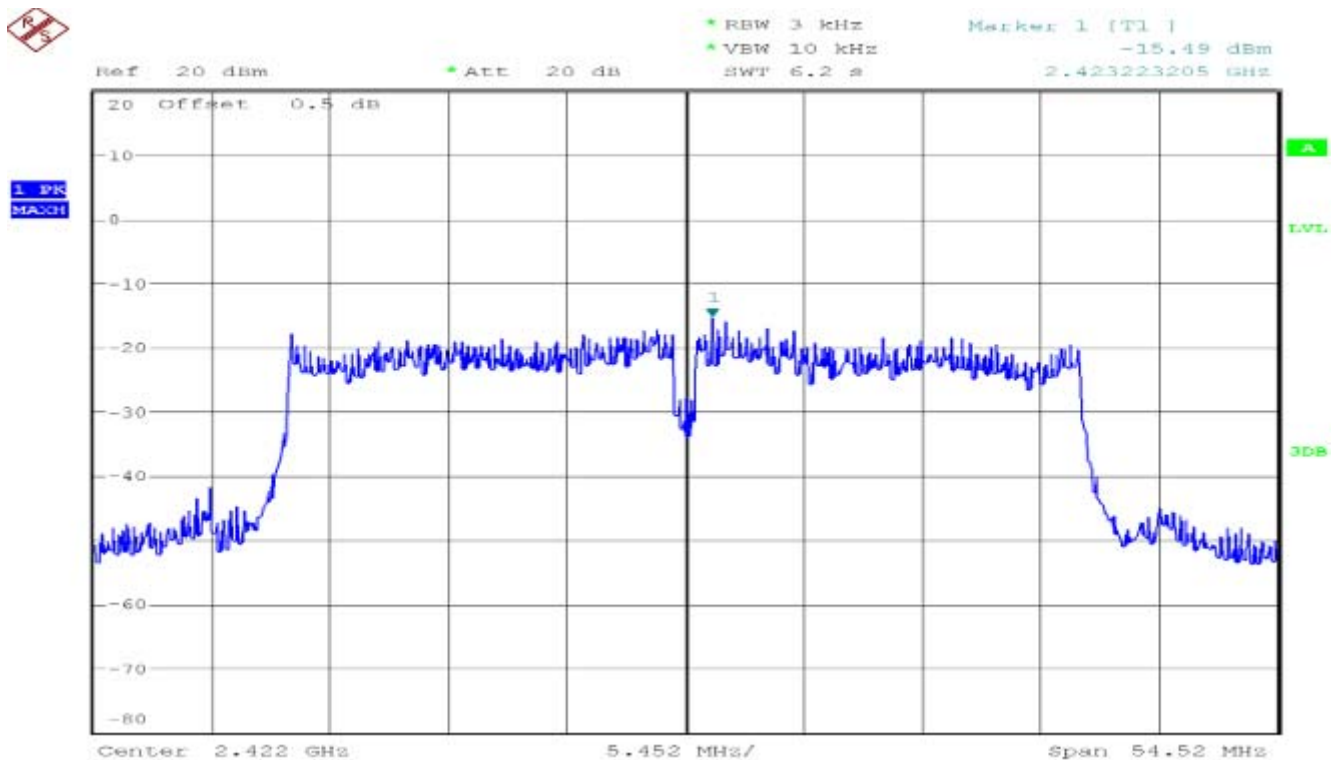

PPSD (CH Mid)

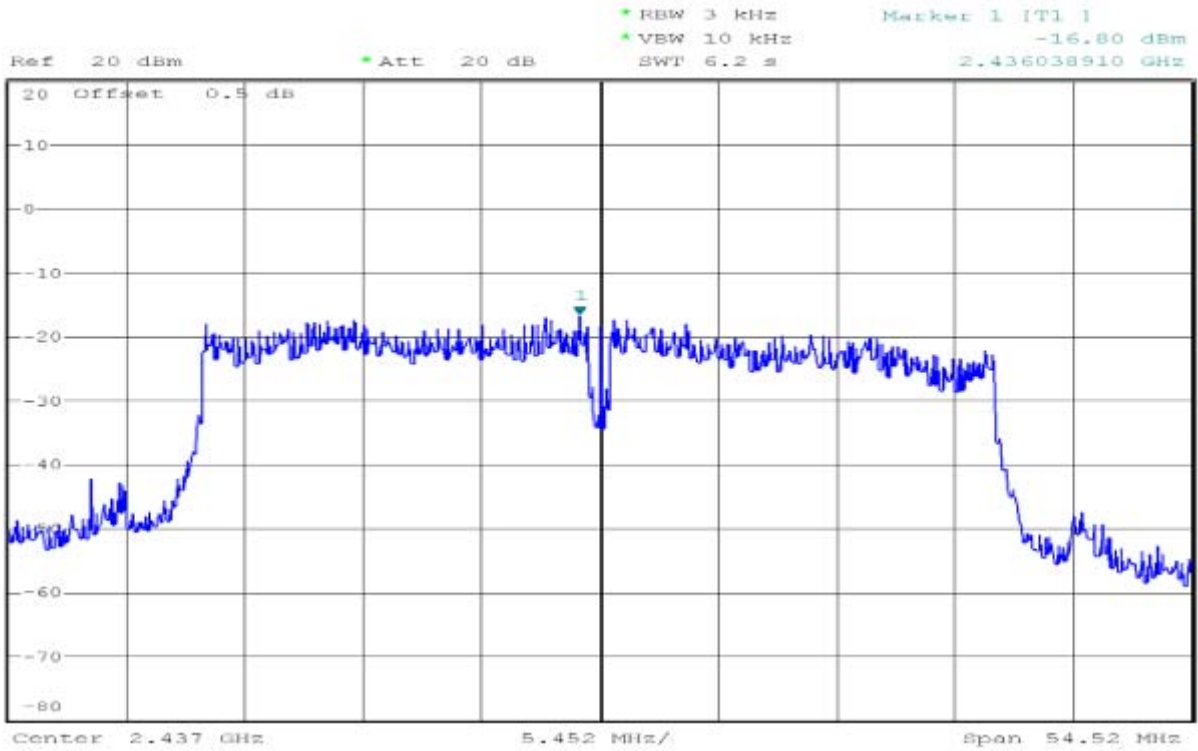

PPSD (CH High)

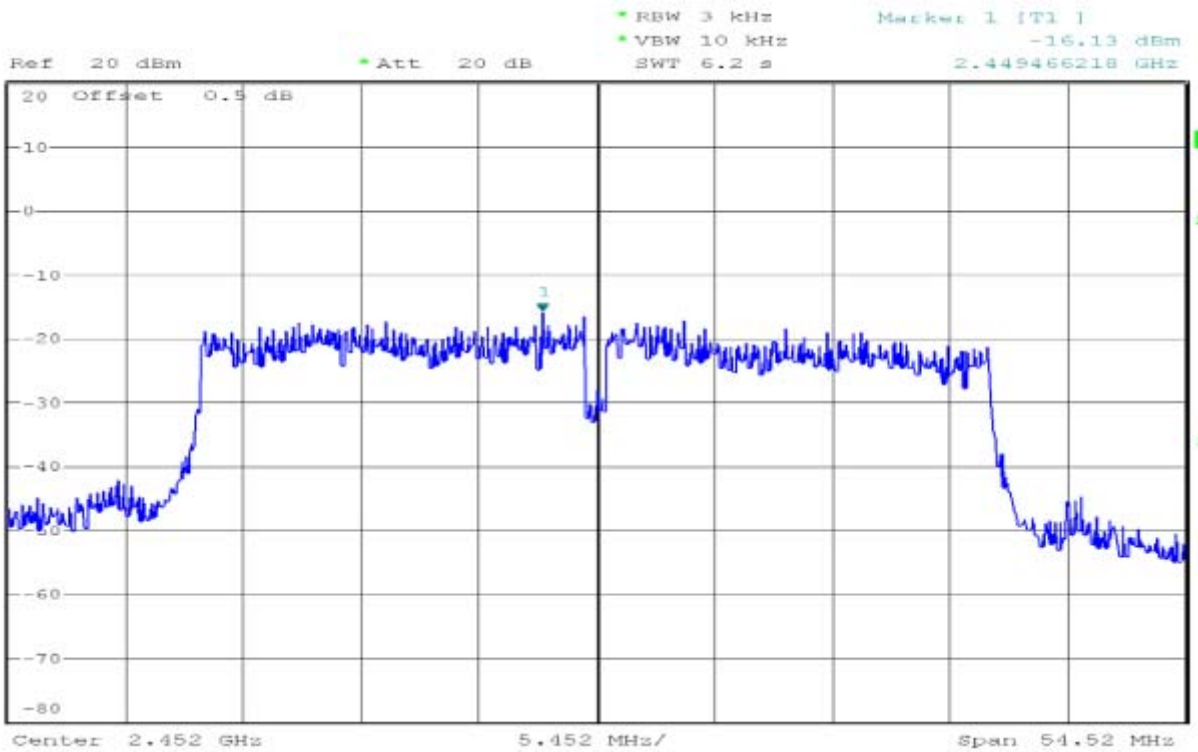


7.5. SPURIOUS EMISSIONS

Conducted Measurement

LIMIT

According to §15.247(d), in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in 15.209(a) (see Section 15.205(c)).

Test Configuration



TEST PROCEDURE

Conducted RF measurements of the transmitter output were made to confirm that the EUT antenna port conducted emissions meet the specified limit and to identify any spurious signals that require further investigation or measurements on the radiated emissions site.

The transmitter output is connected to the spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 300 kHz.

Measurements are made over the 30MHz to 40GHz range with the transmitter set to the lowest, middle, and highest channels.

TEST RESULTS



No non-compliance noted



Test Plot

OUT-OF-BAND SPURIOUS EMISSIONS-CONDUCTED MEASUREMENT



IEEE 802.11b mode/Chain 0


CH Low

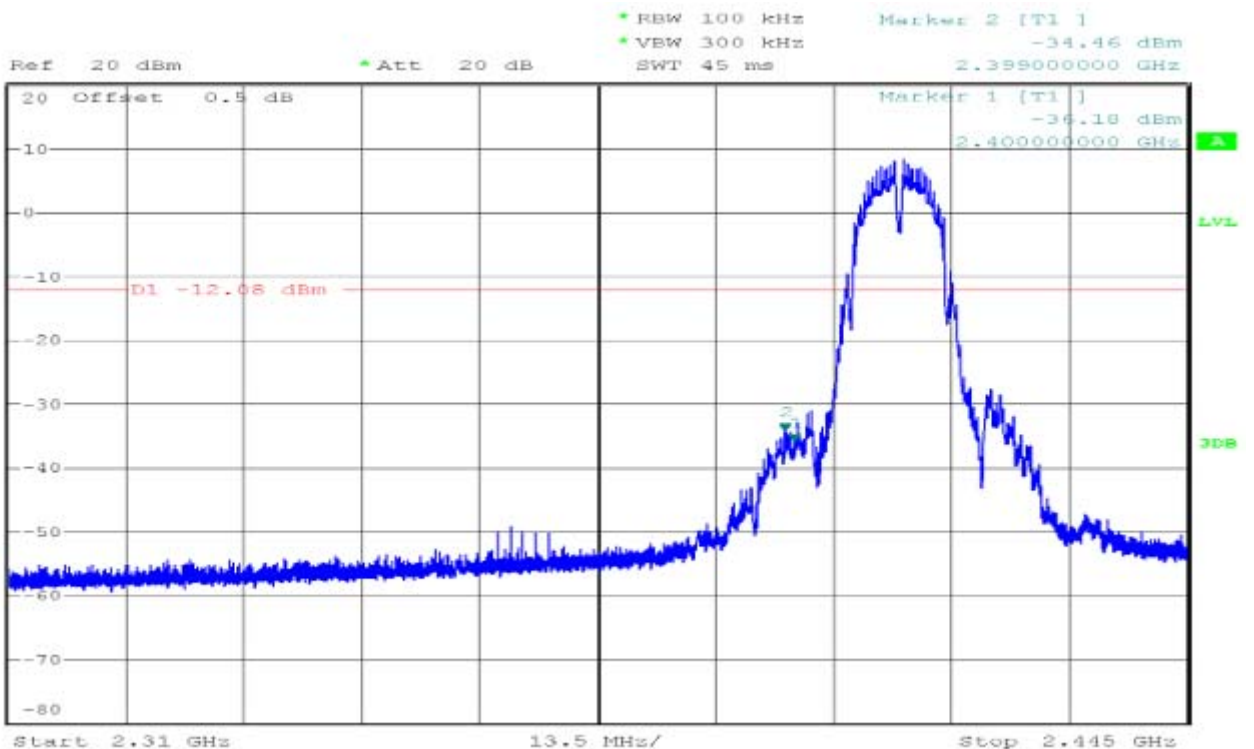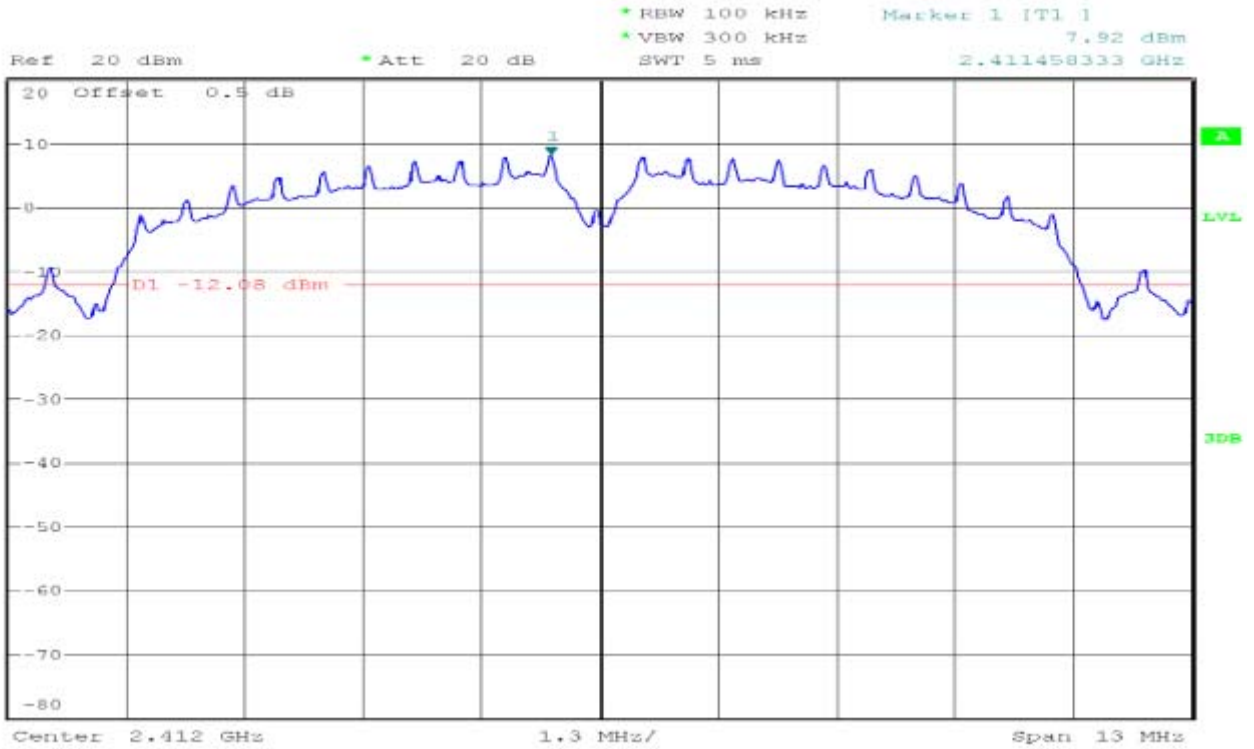

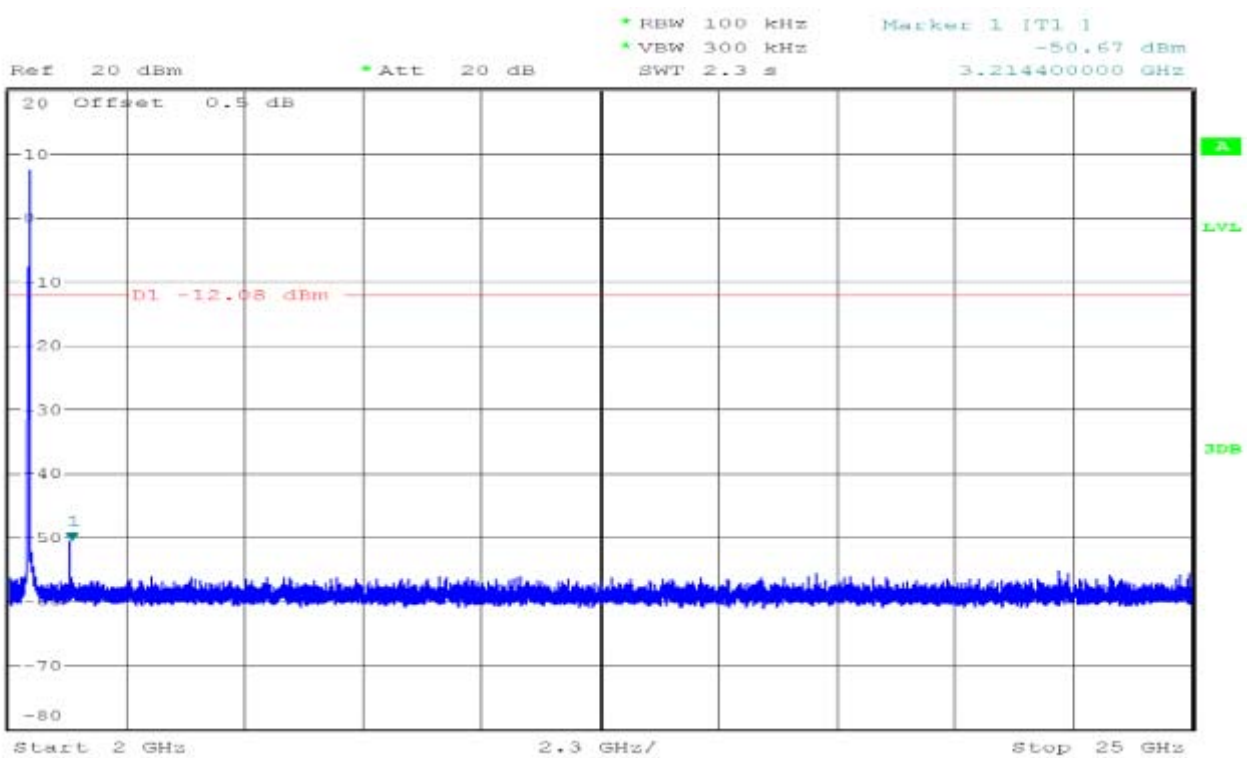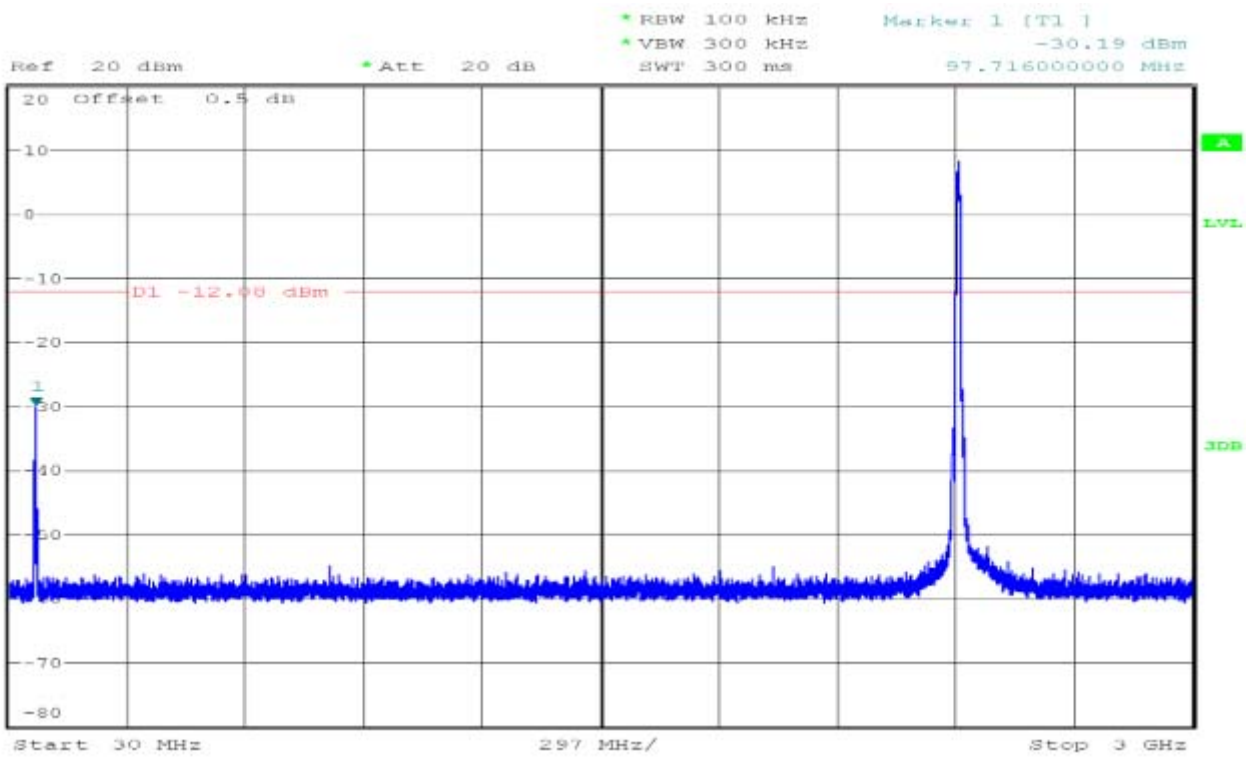




CH Mid

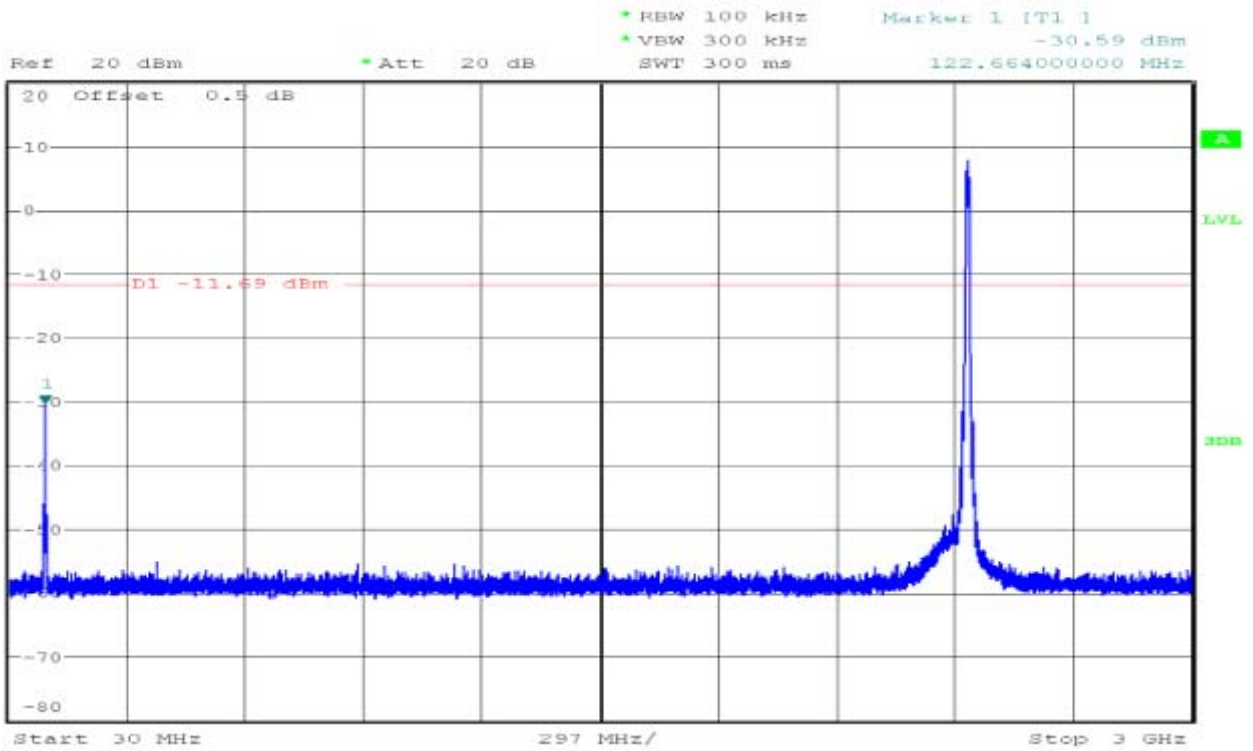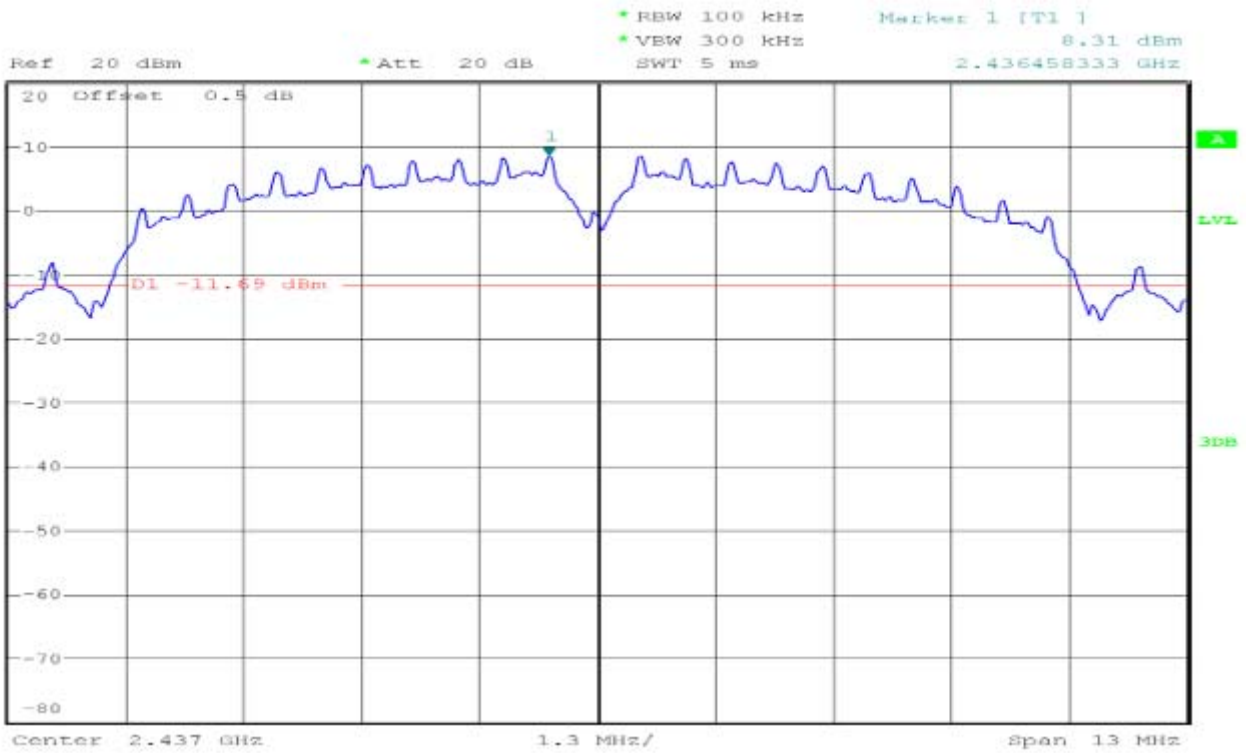


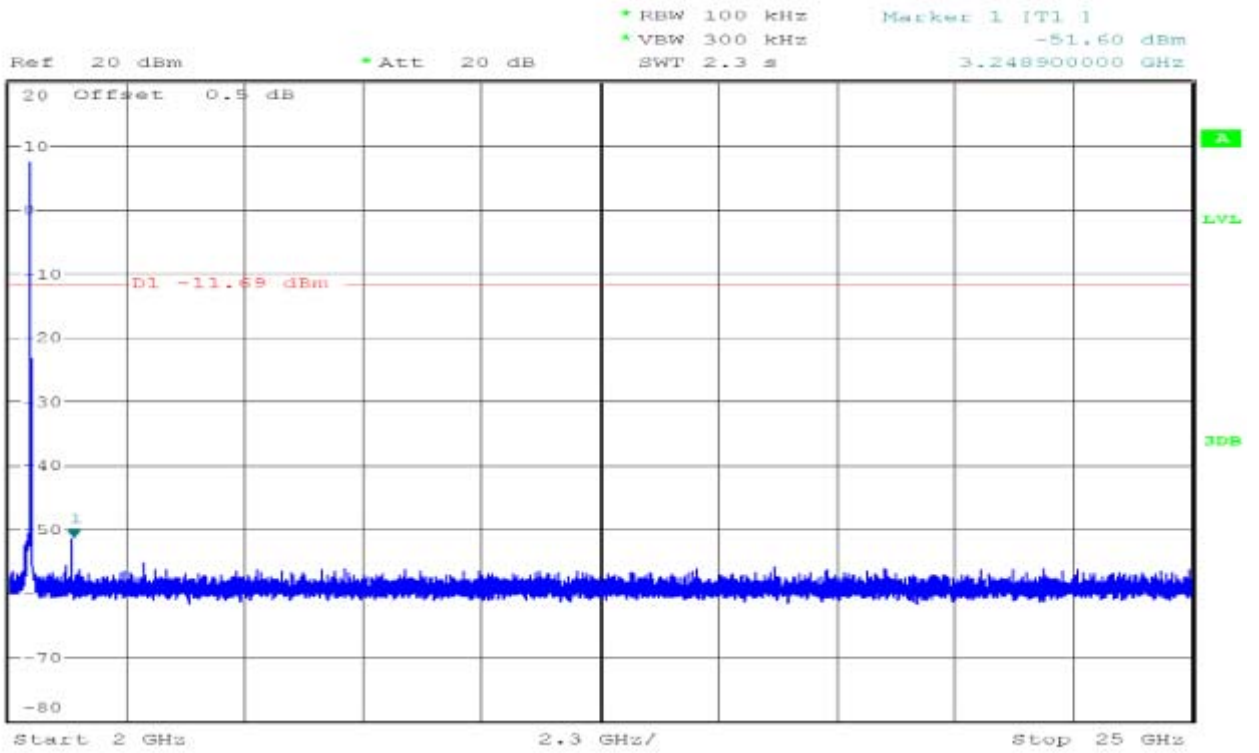

CH High

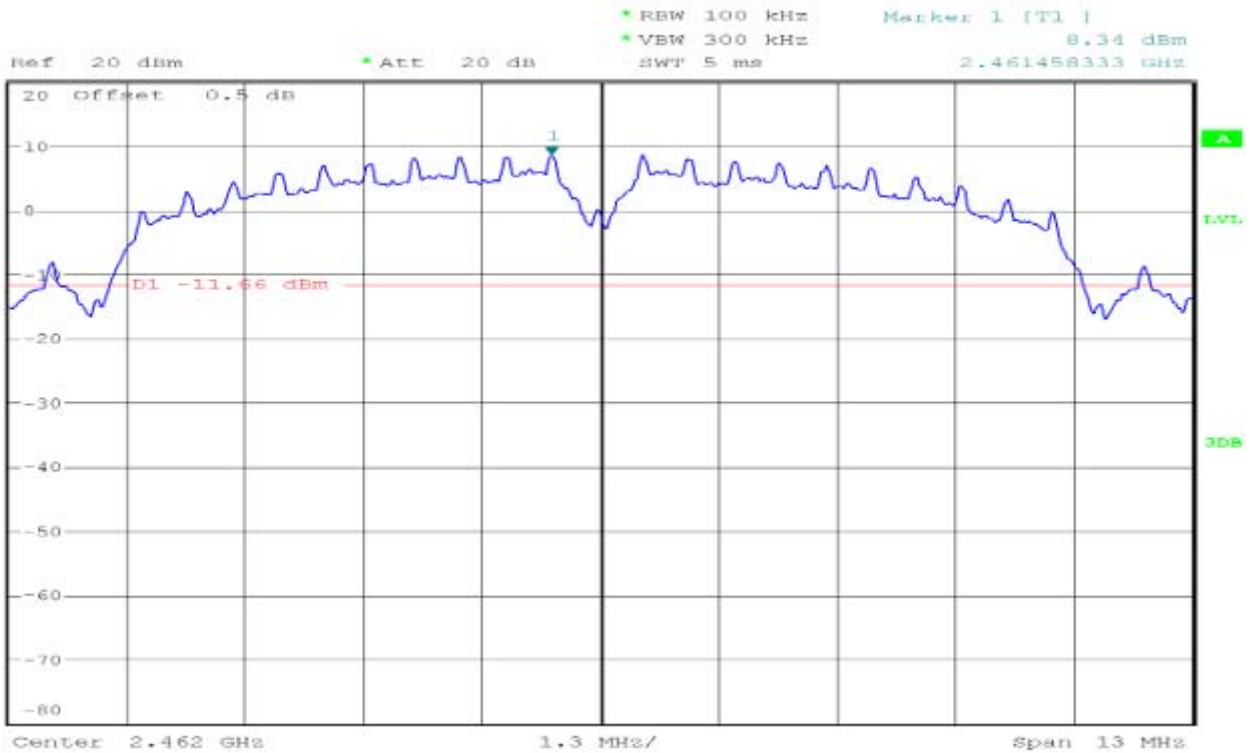


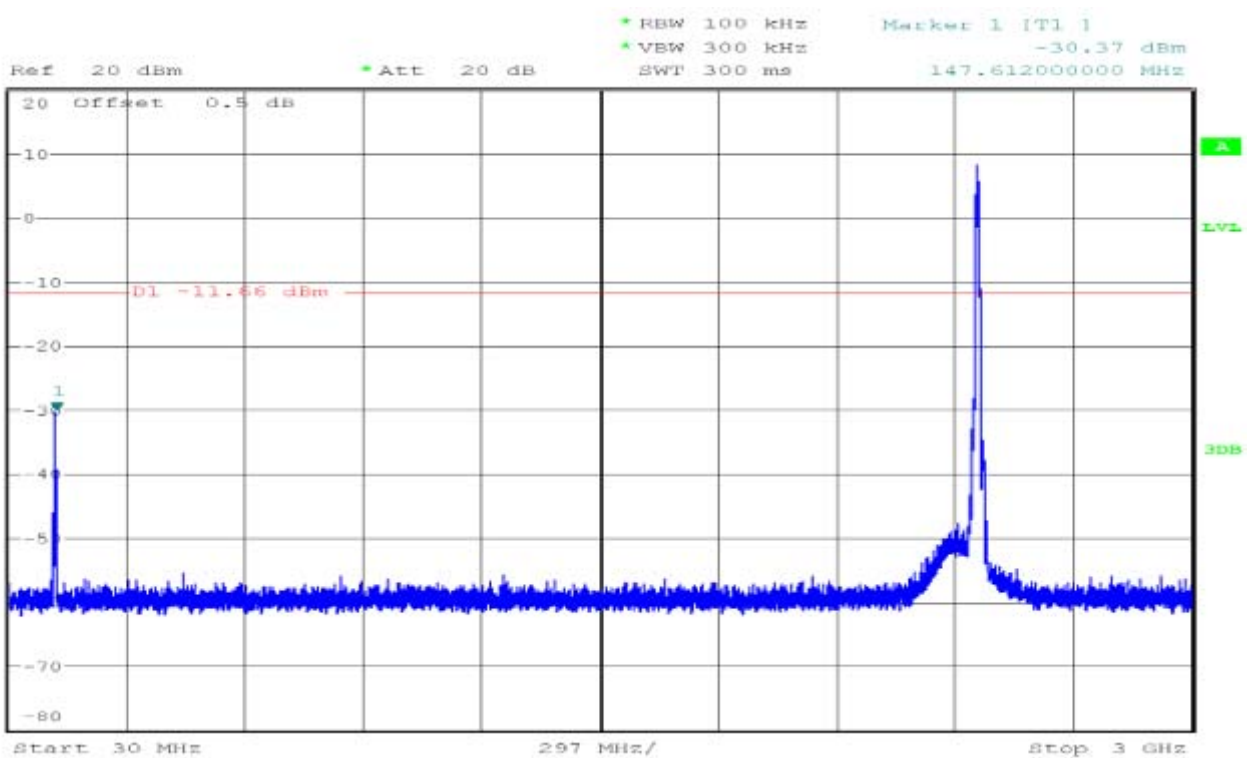
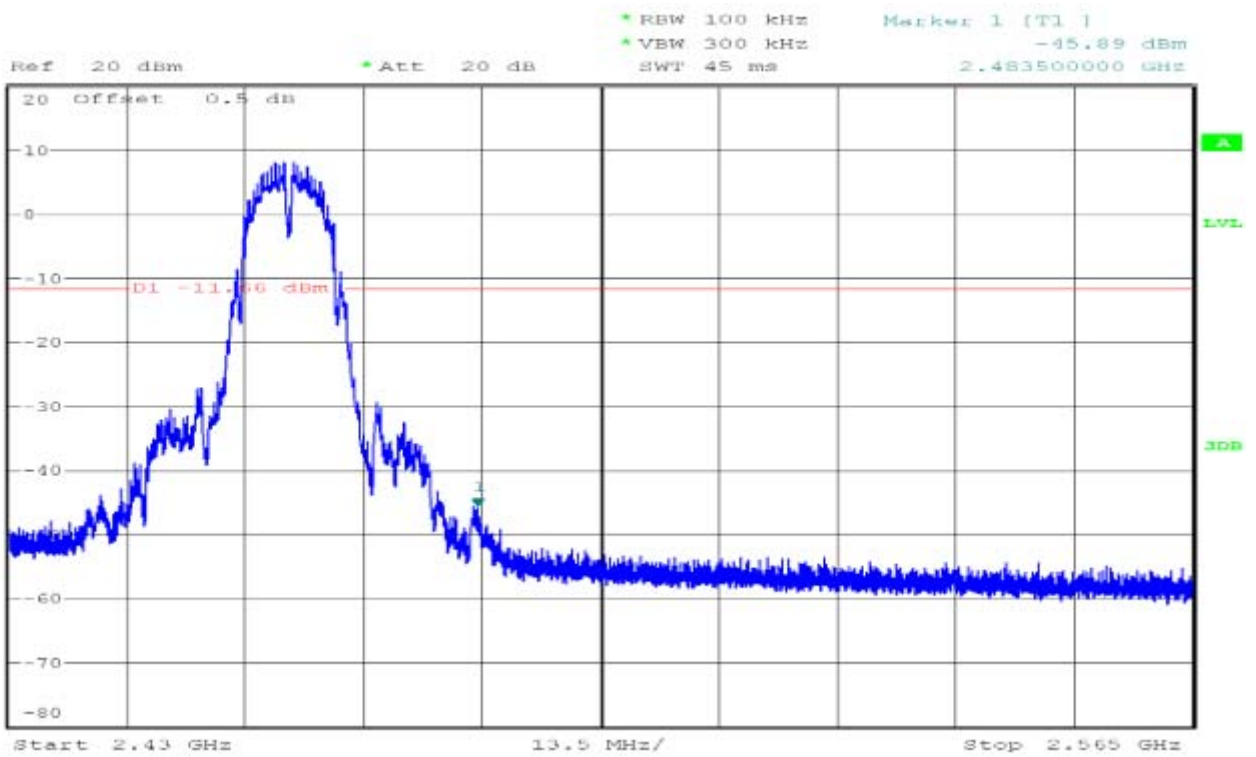


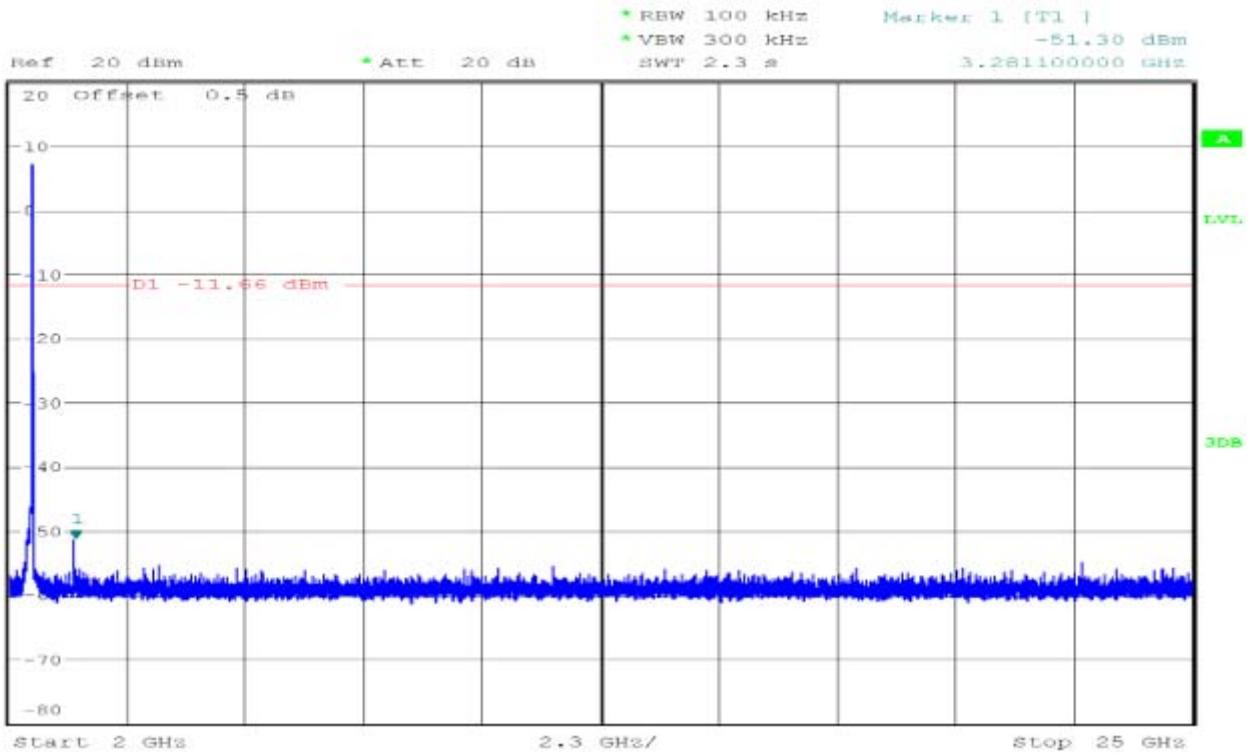


IEEE 802.11b mode/Chain 1


CH Low


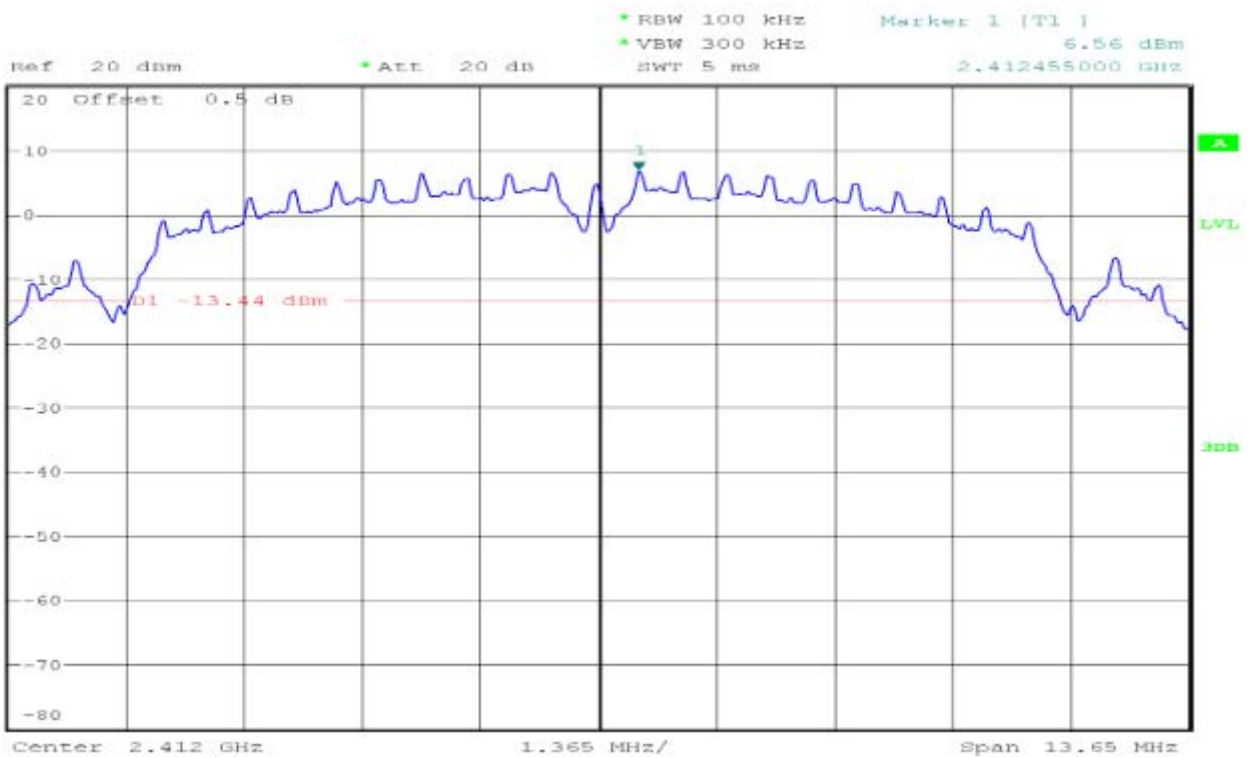


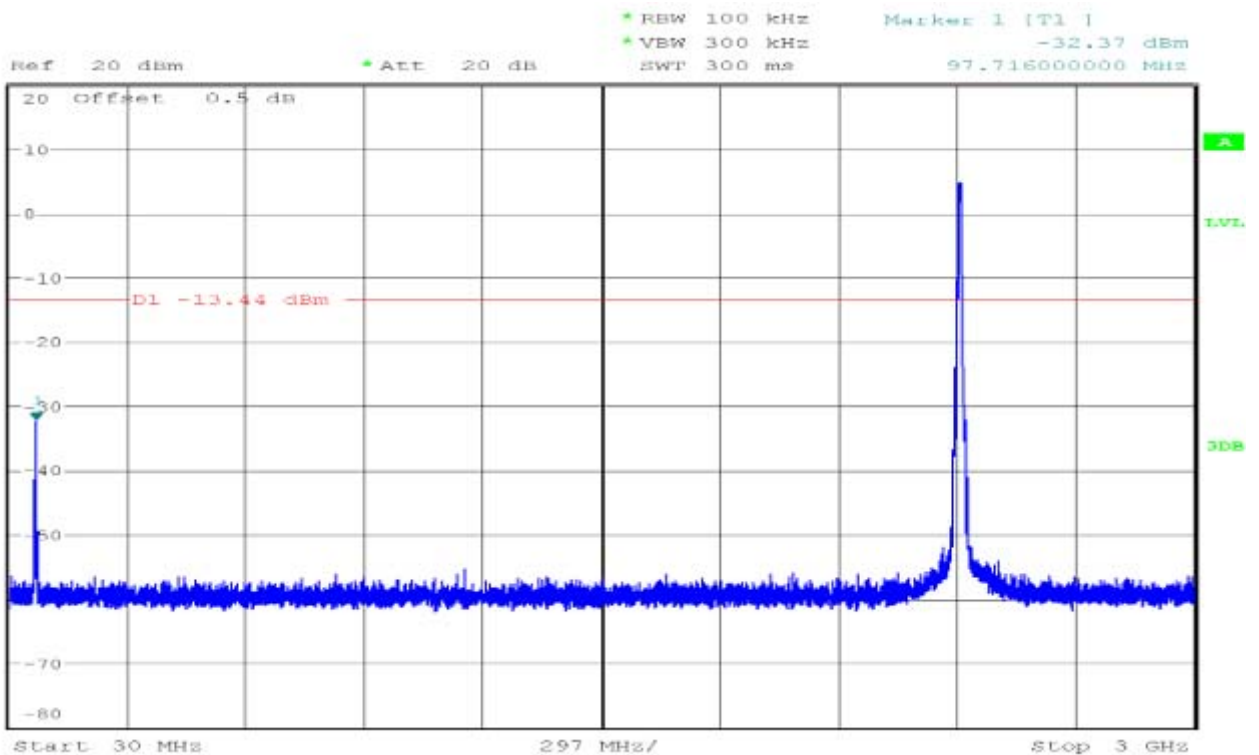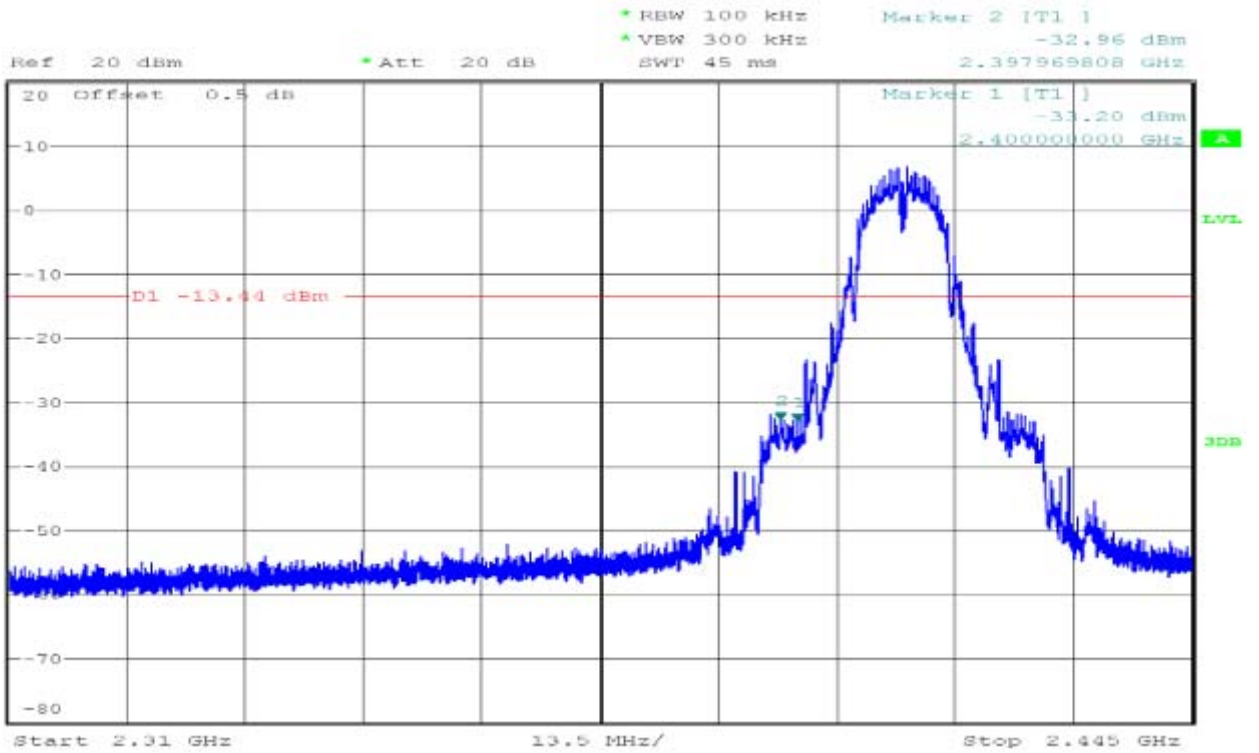


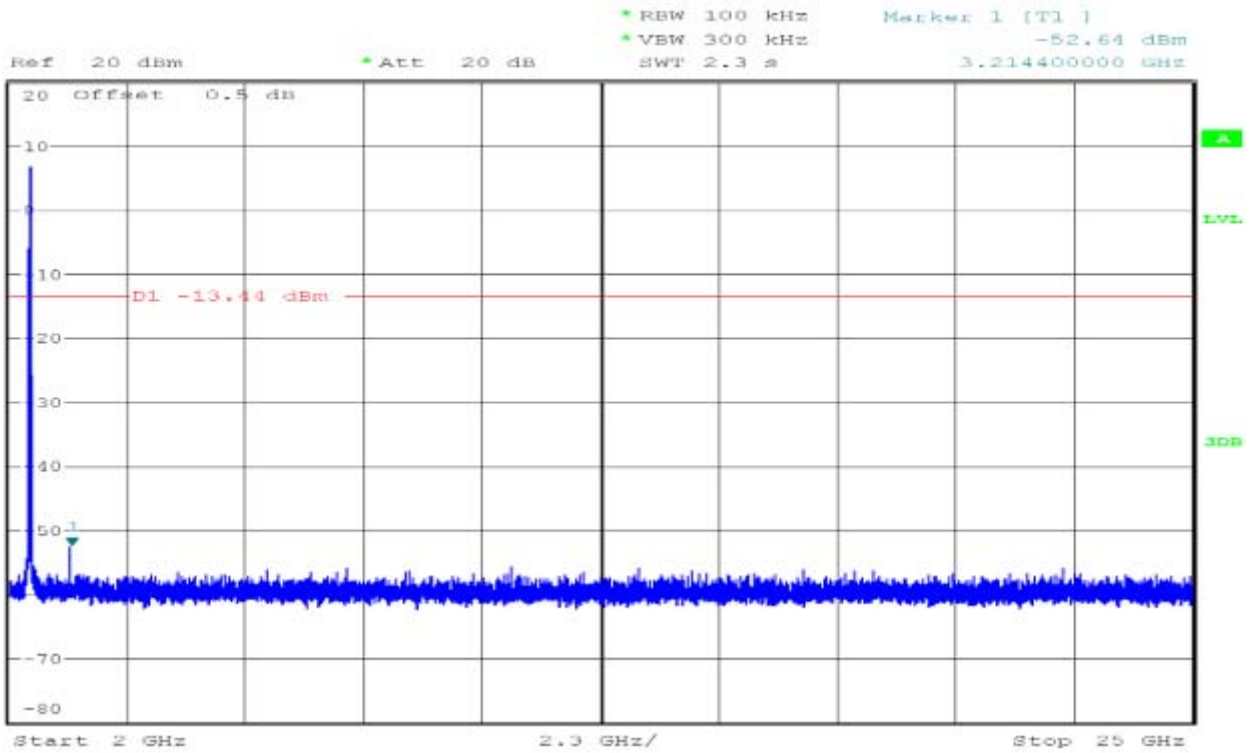




CH Mid

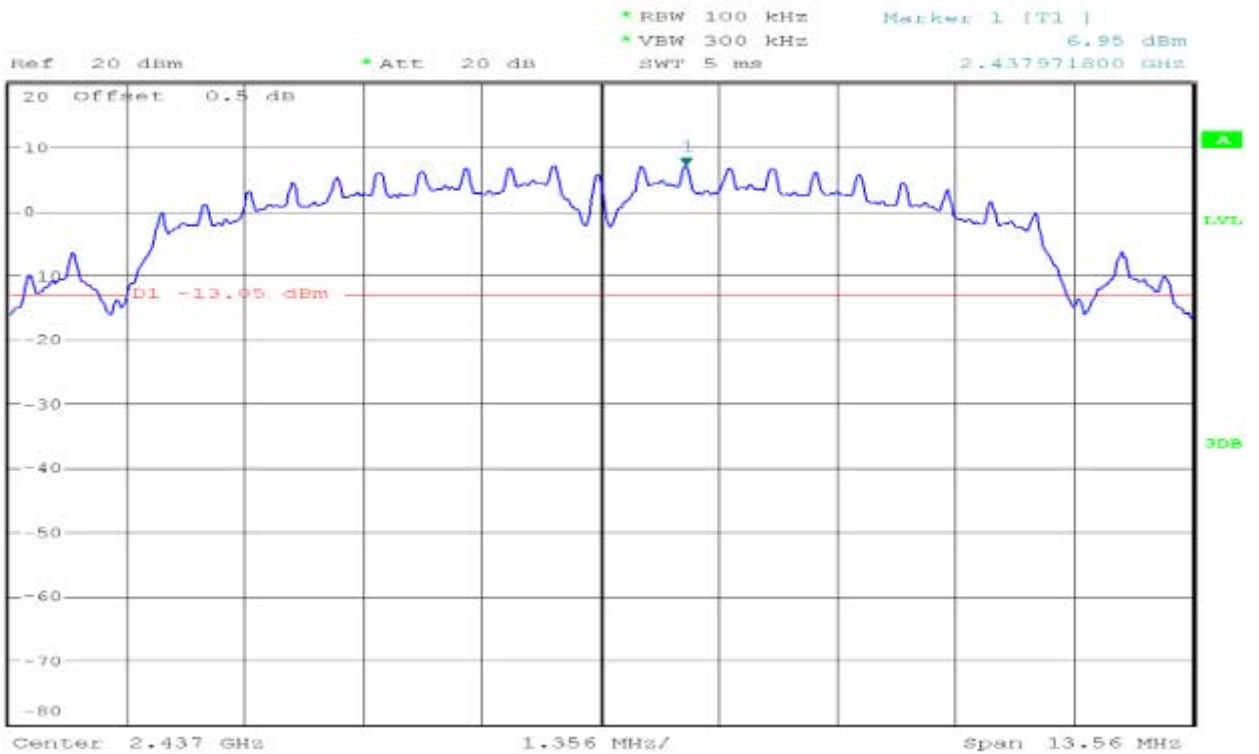

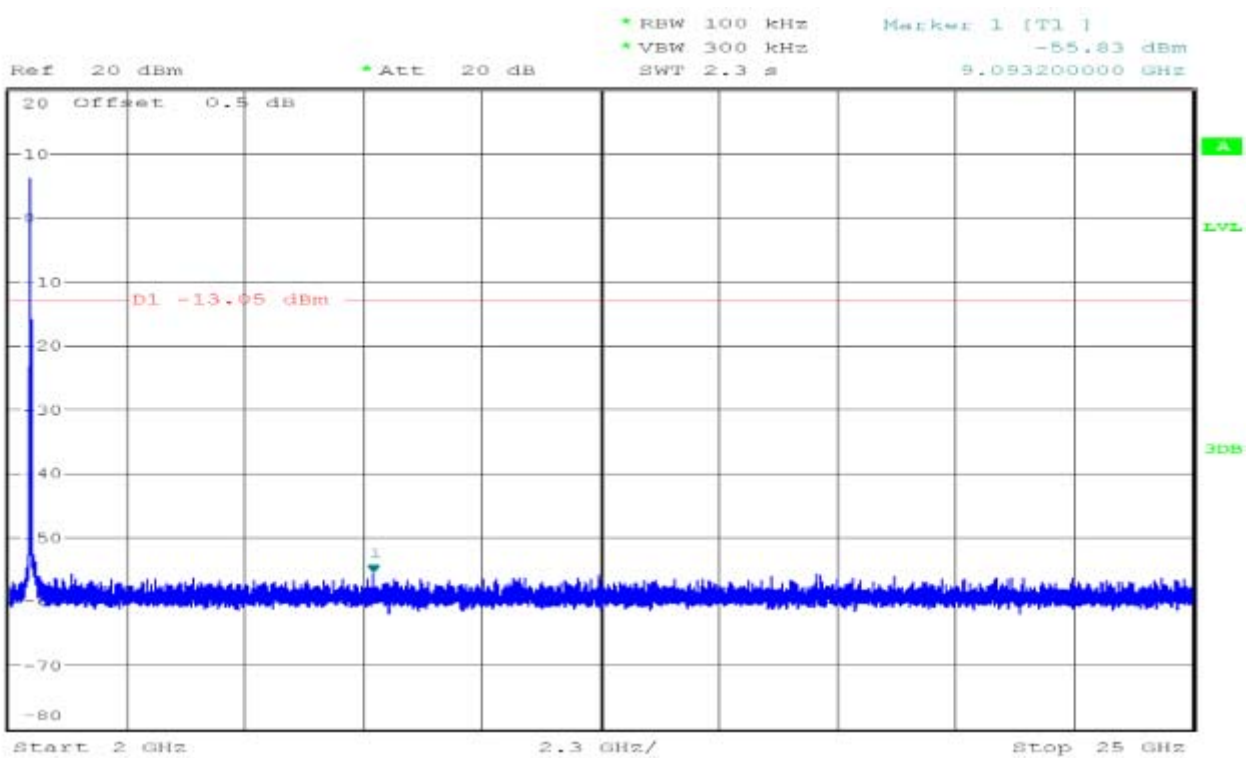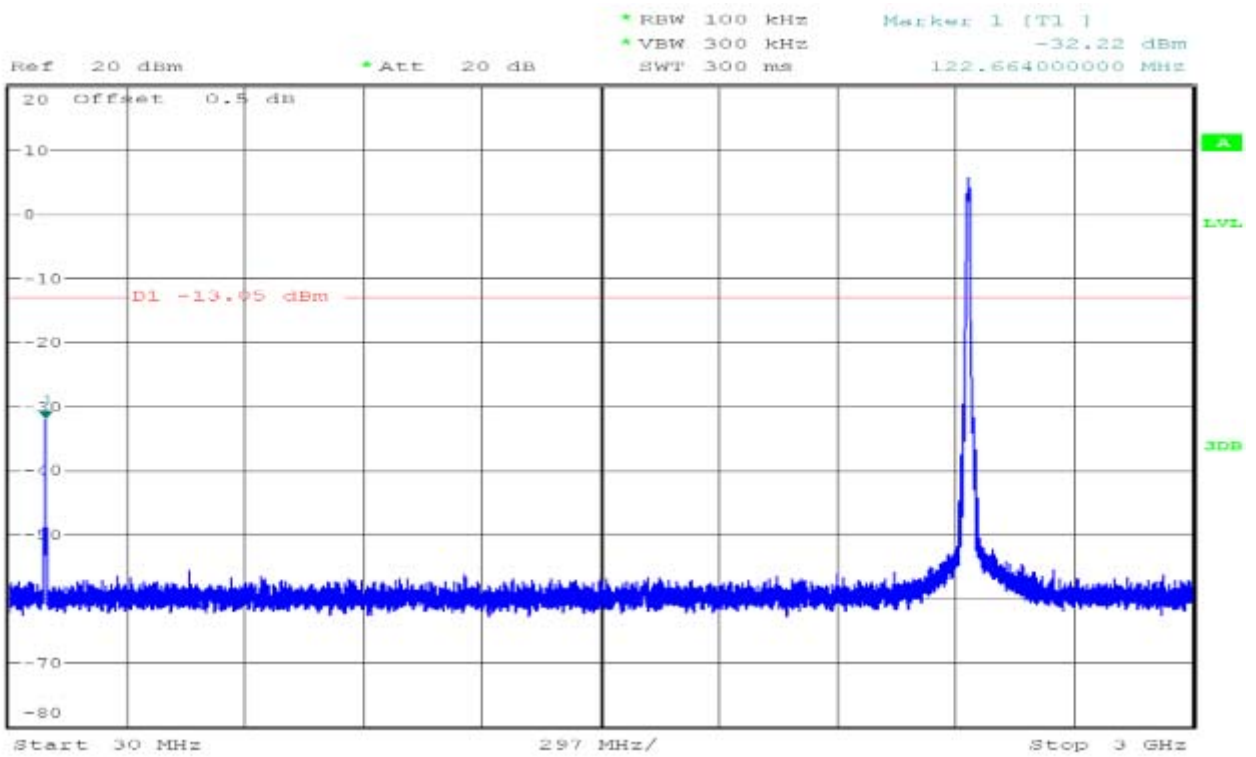



CH High

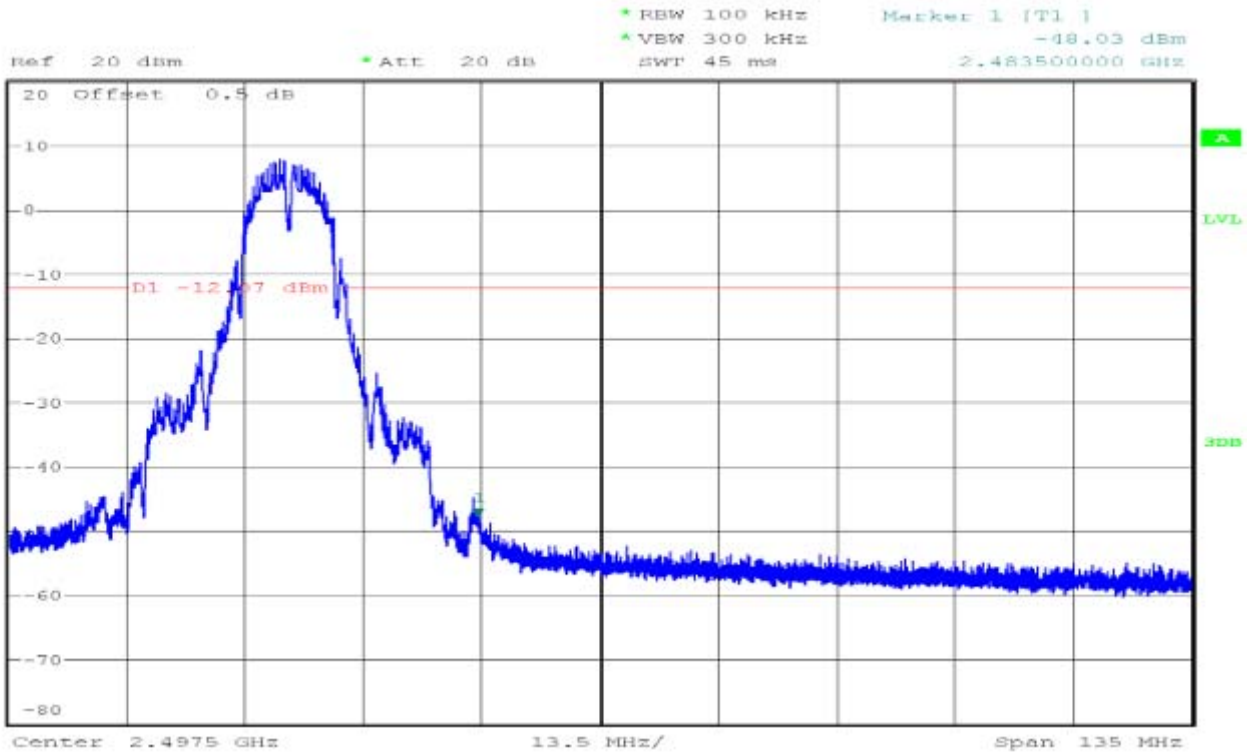
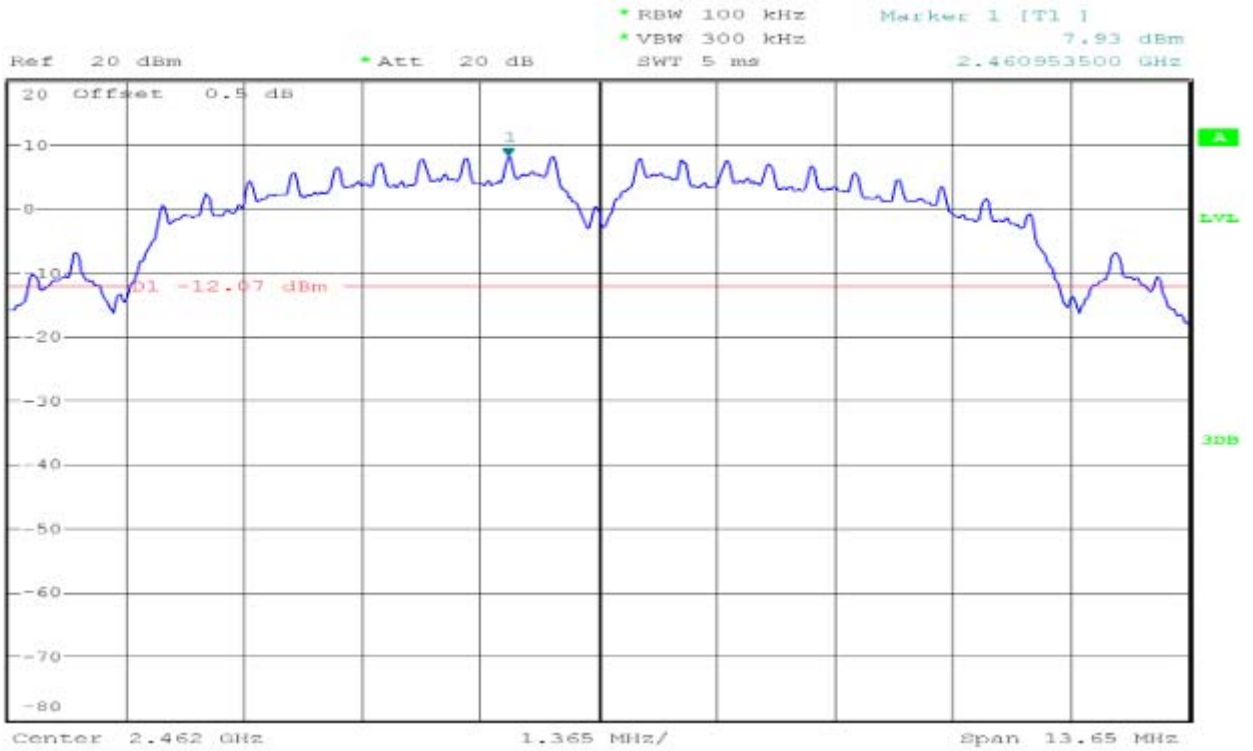


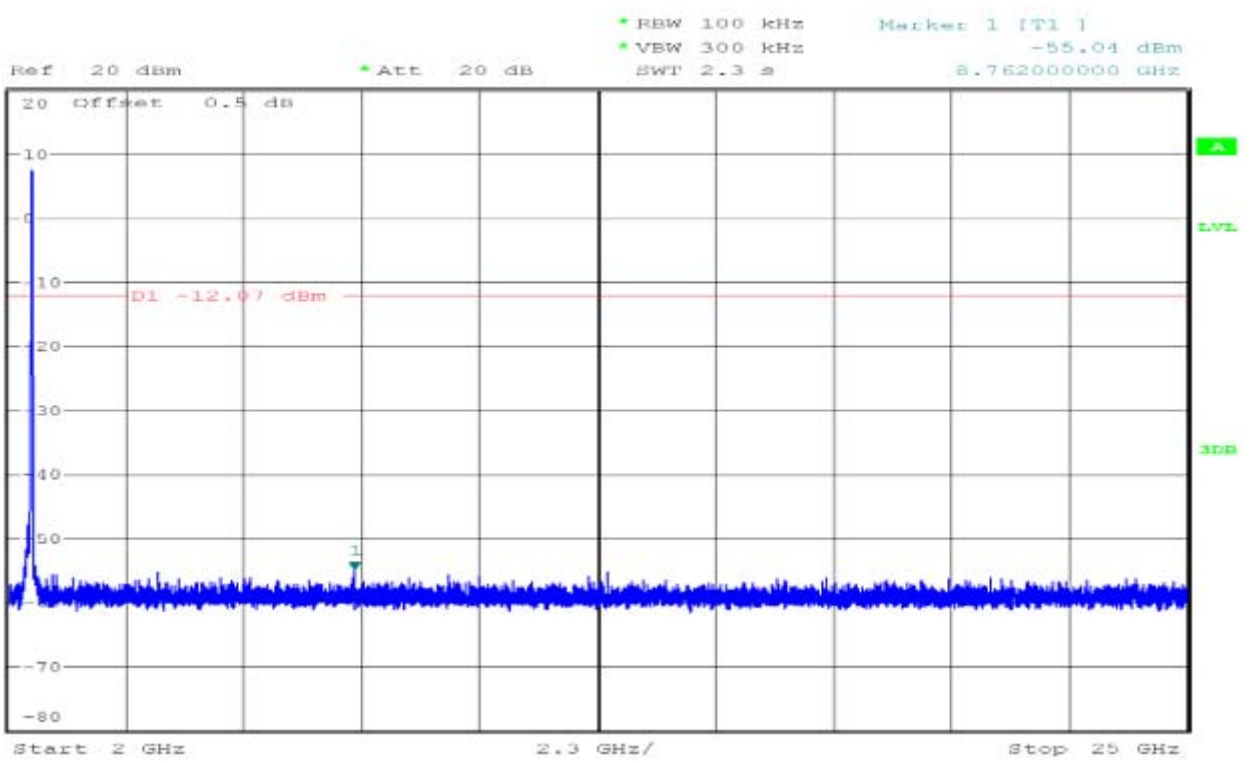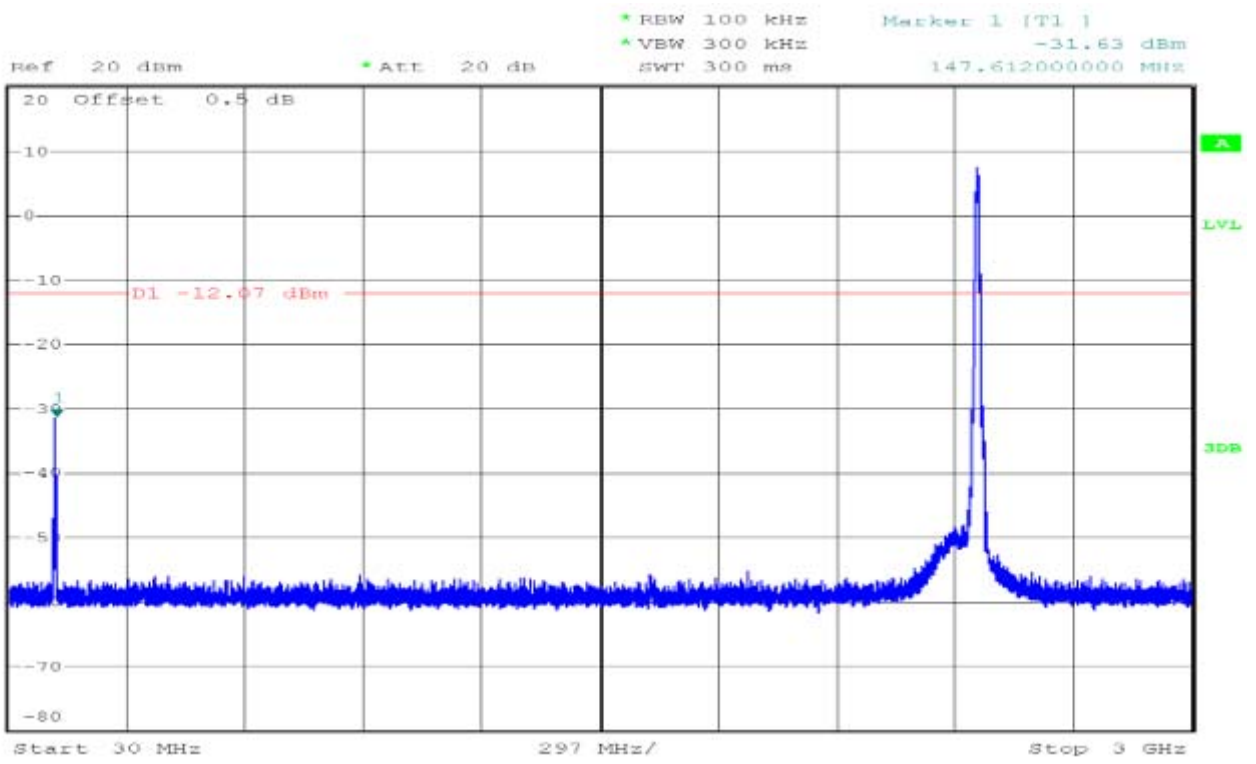



IEEE 802.11g mode/Chain 0


CH Low

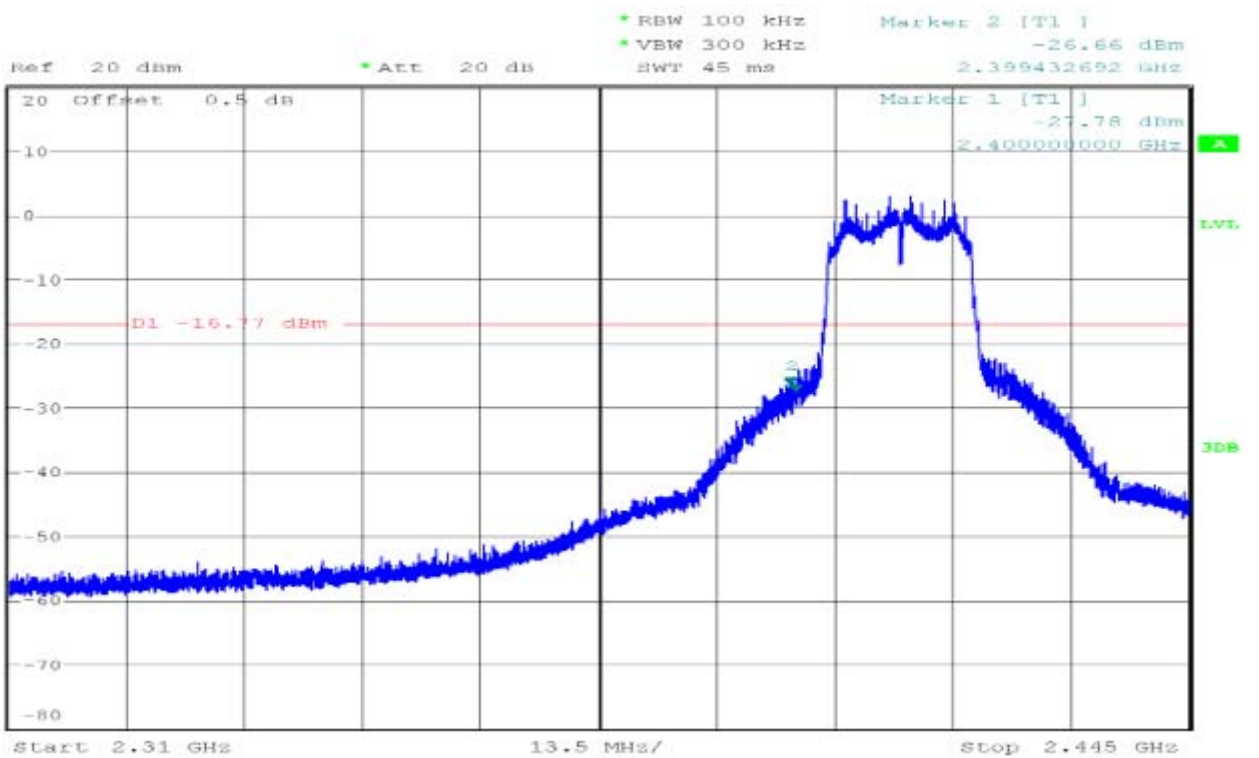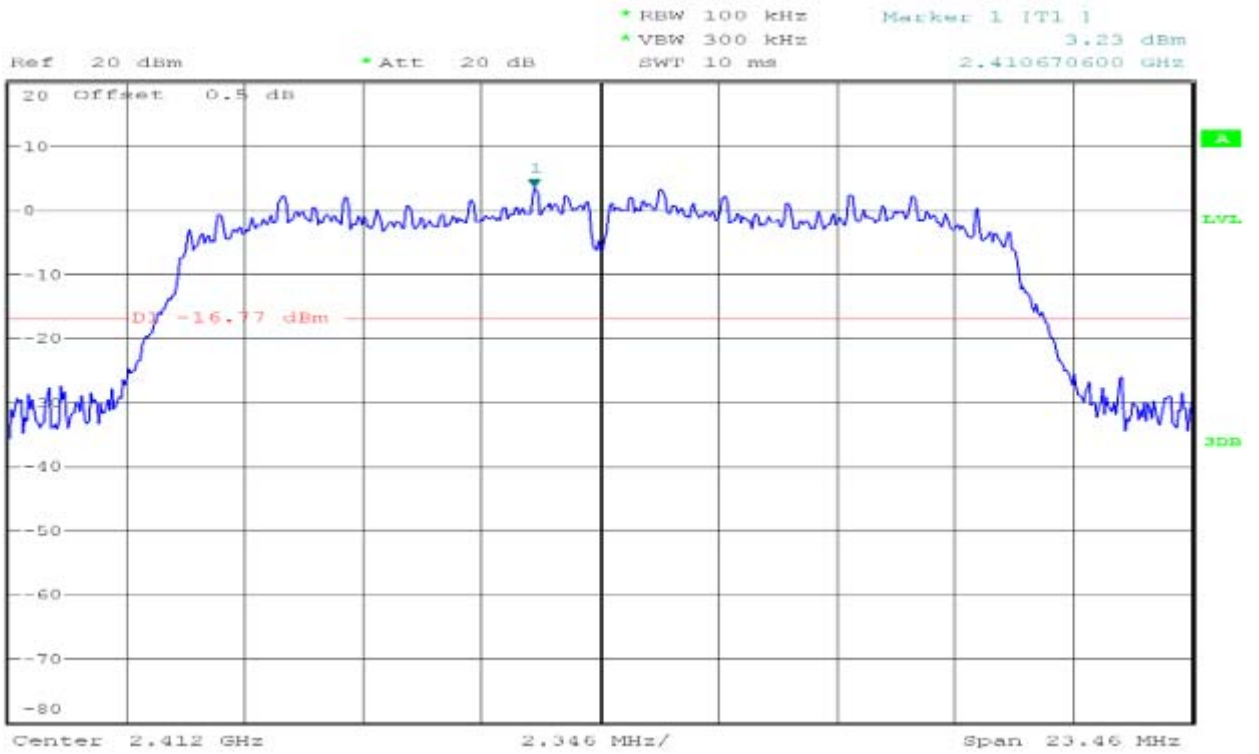

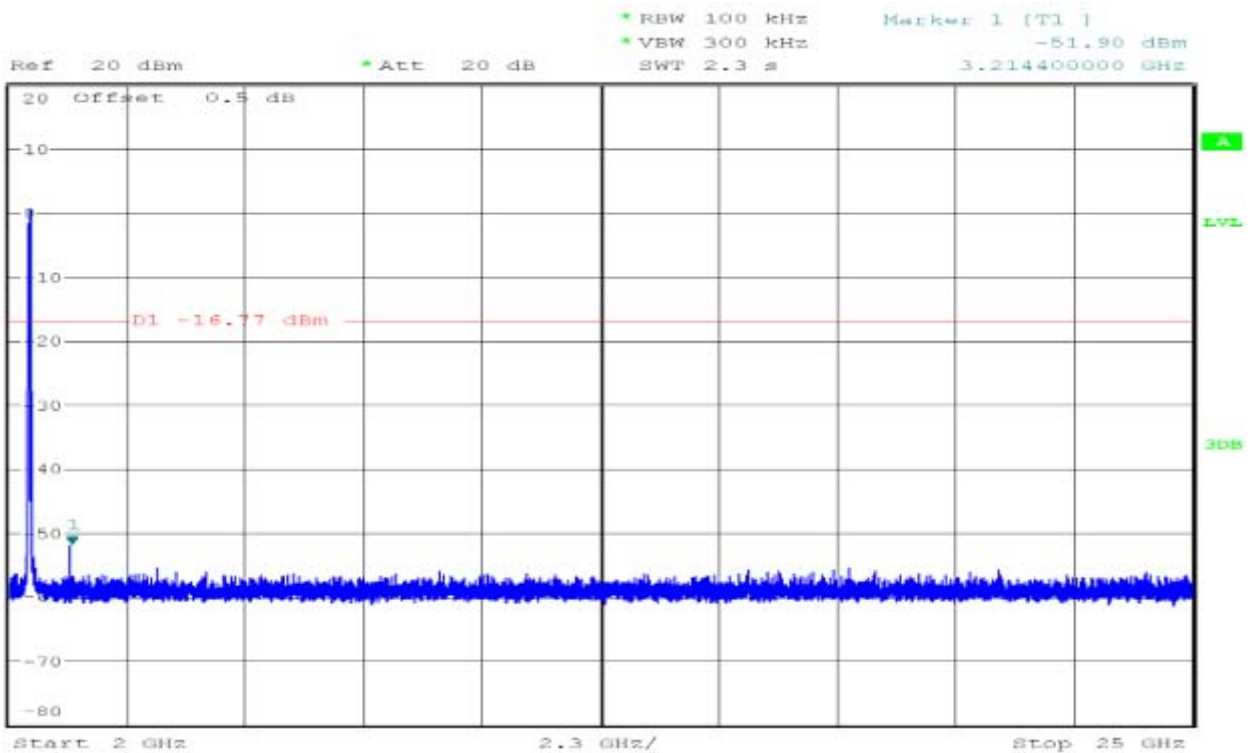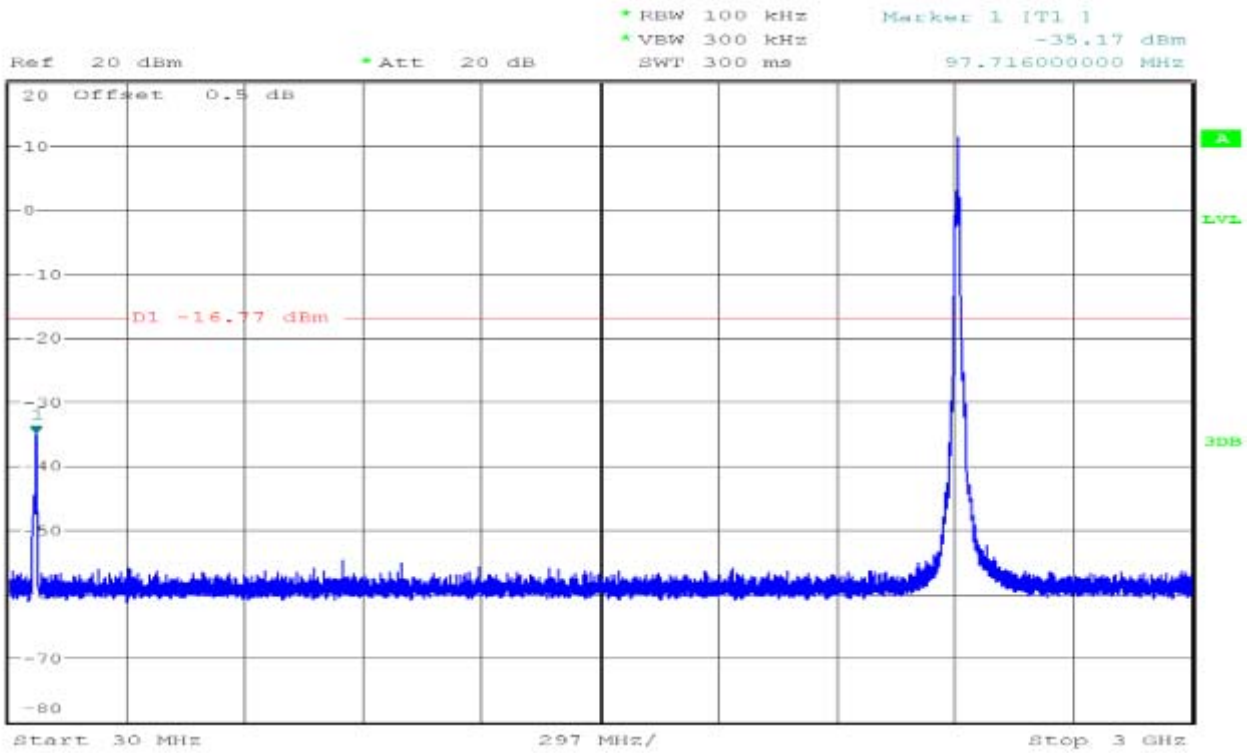




CH Mid

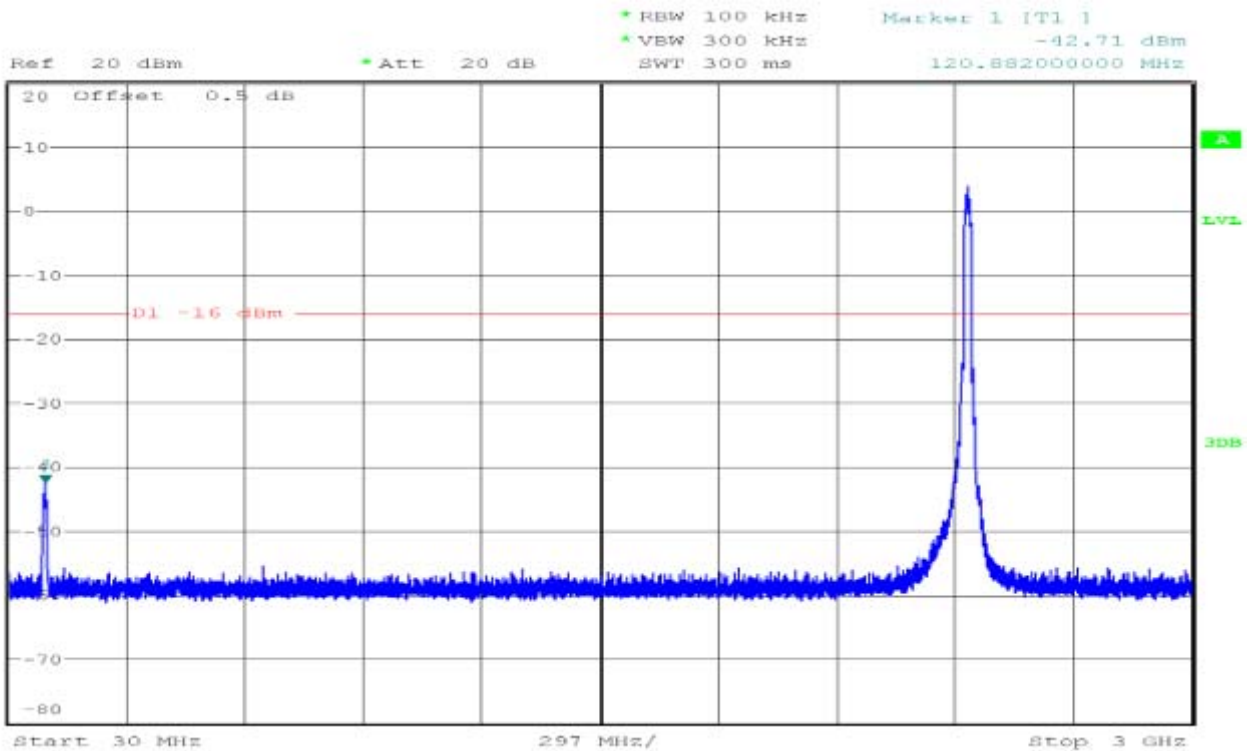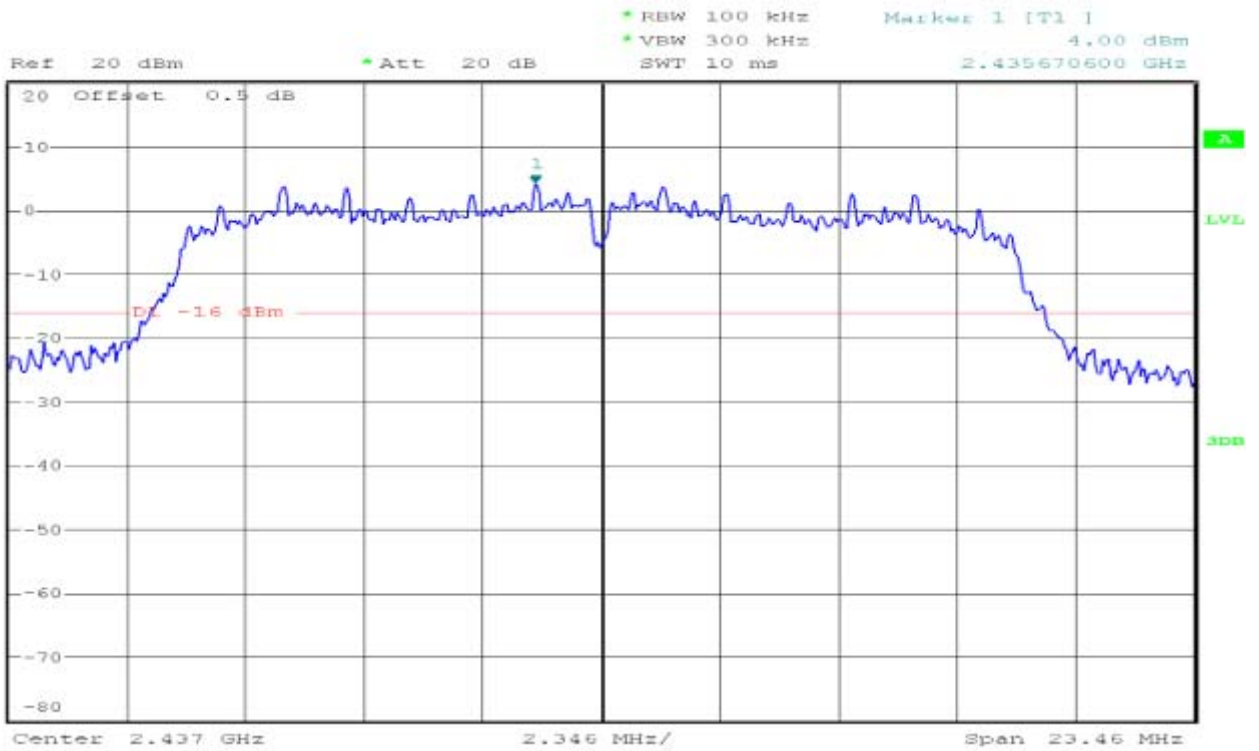


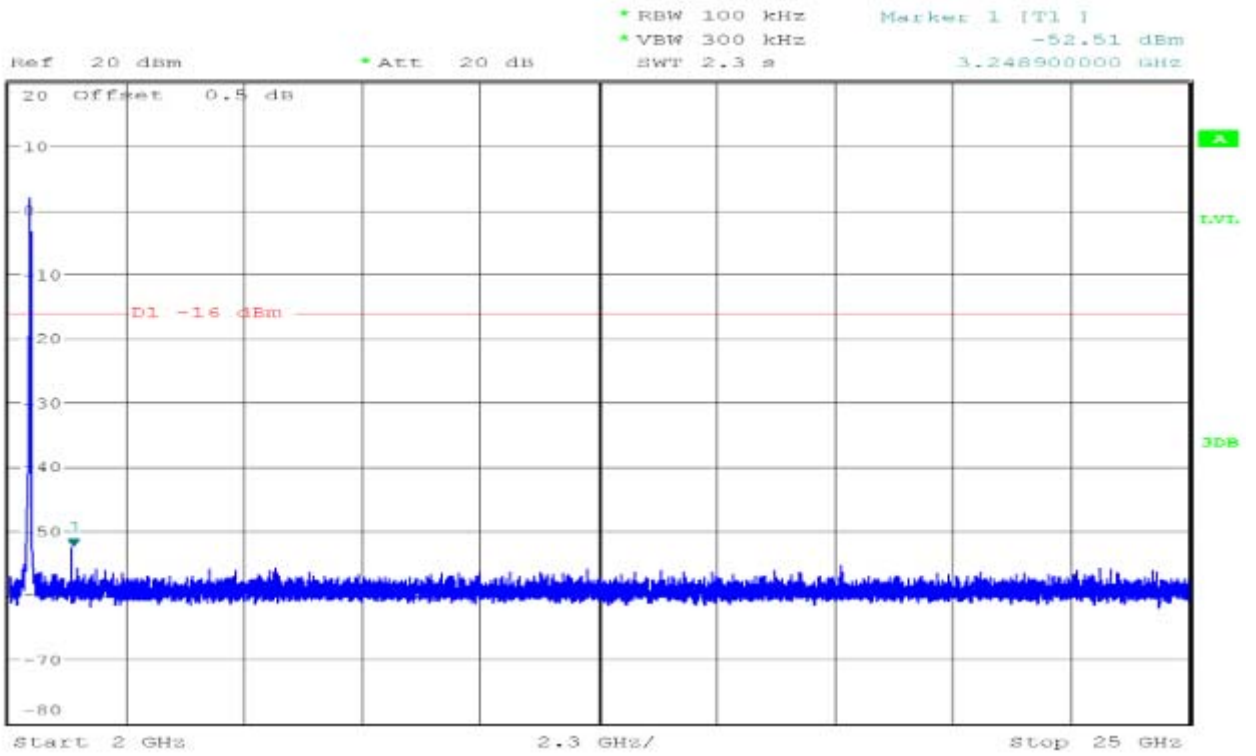

CH High

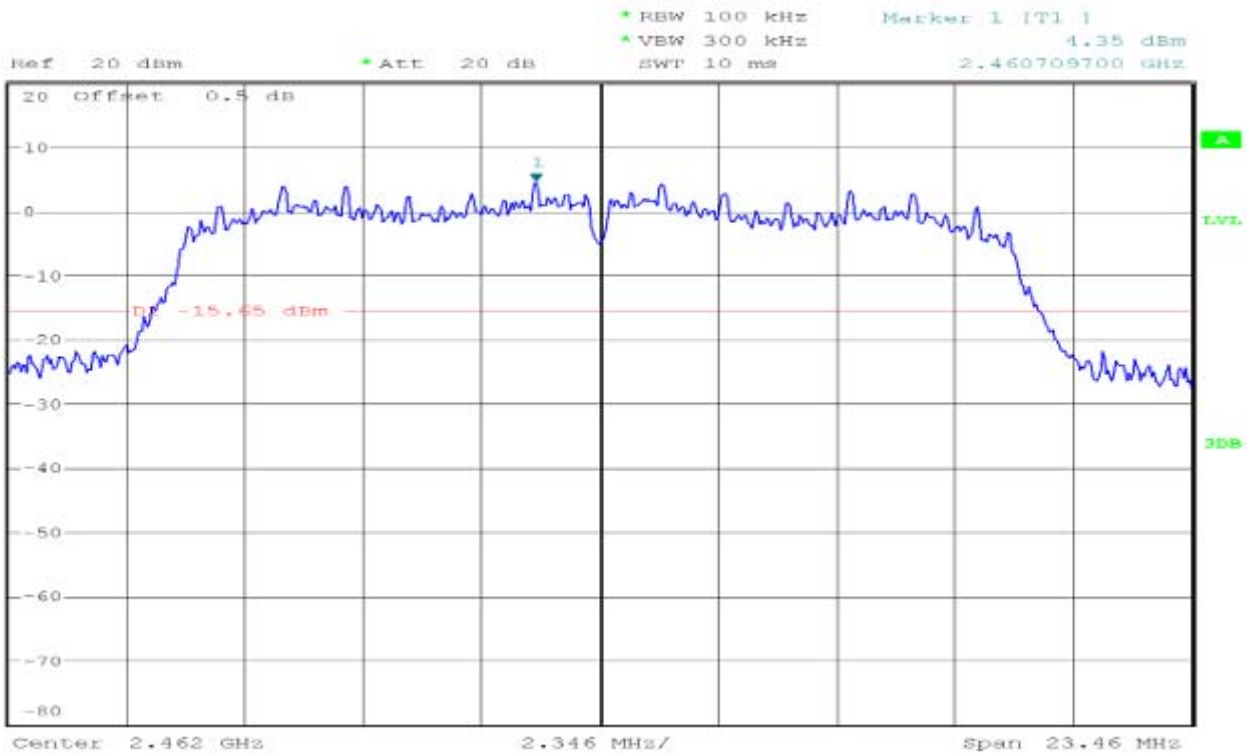


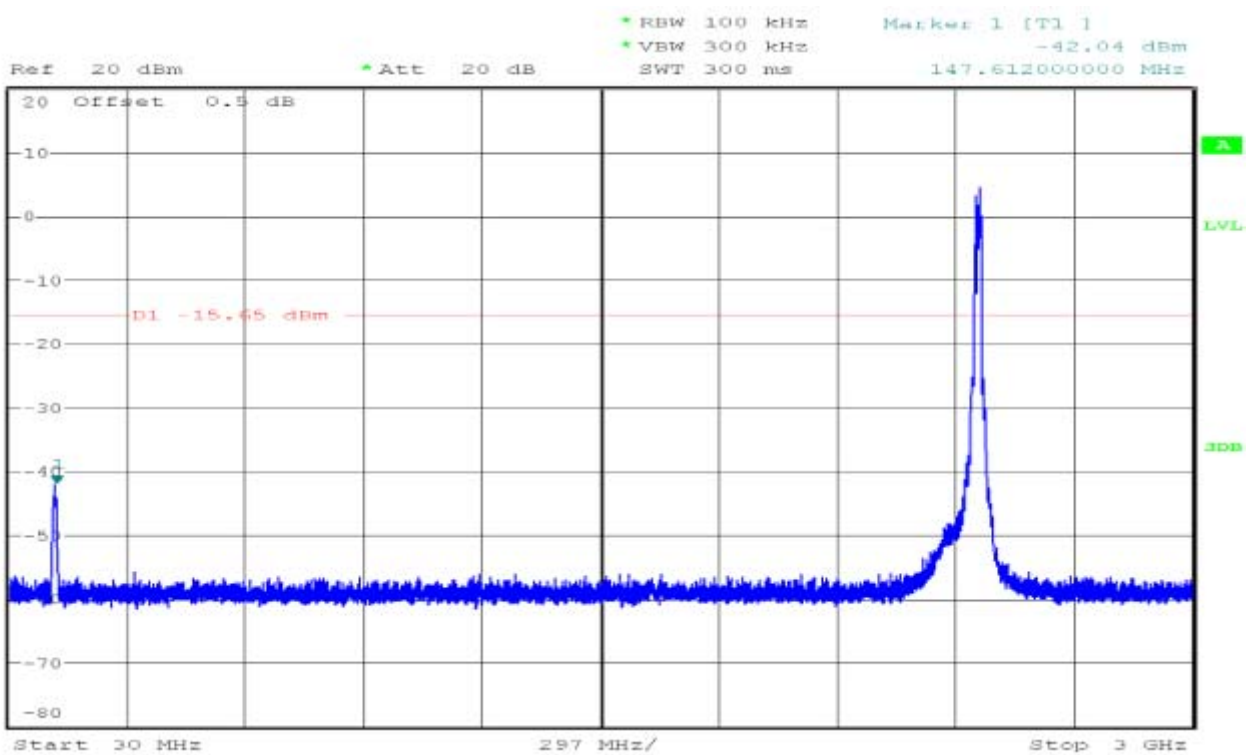
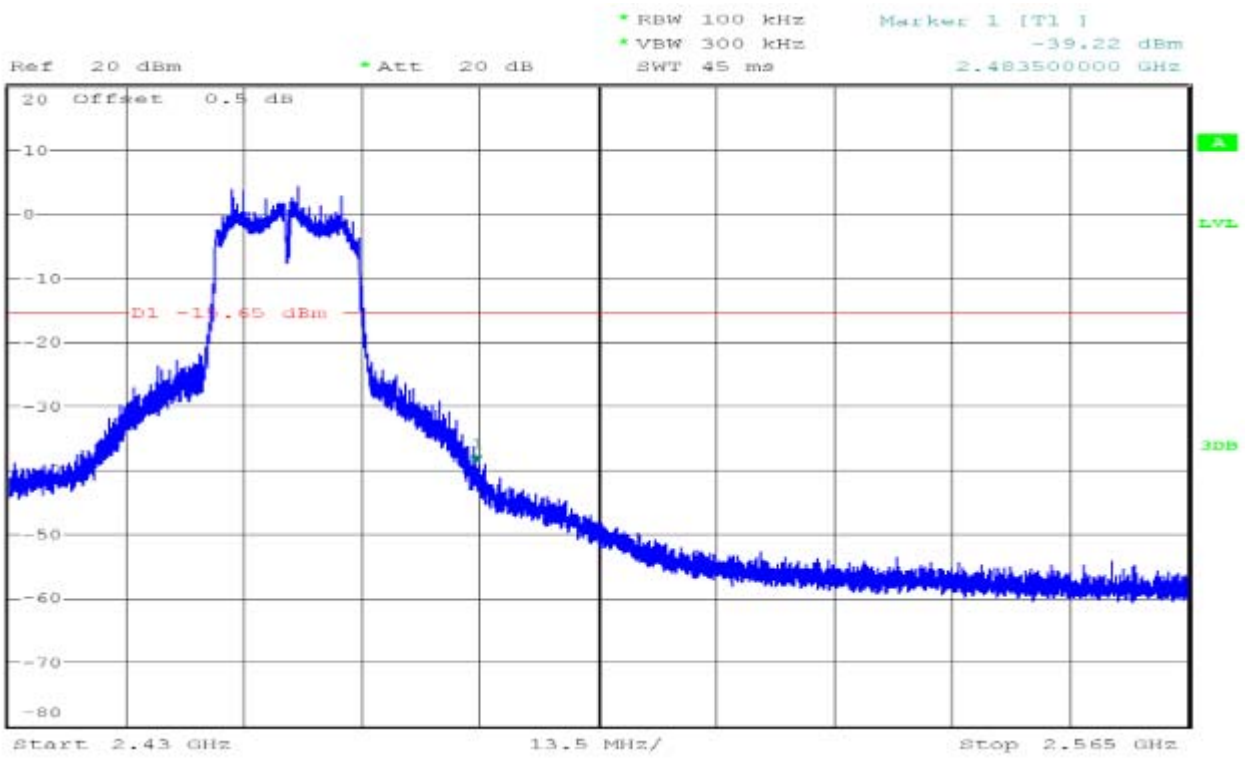


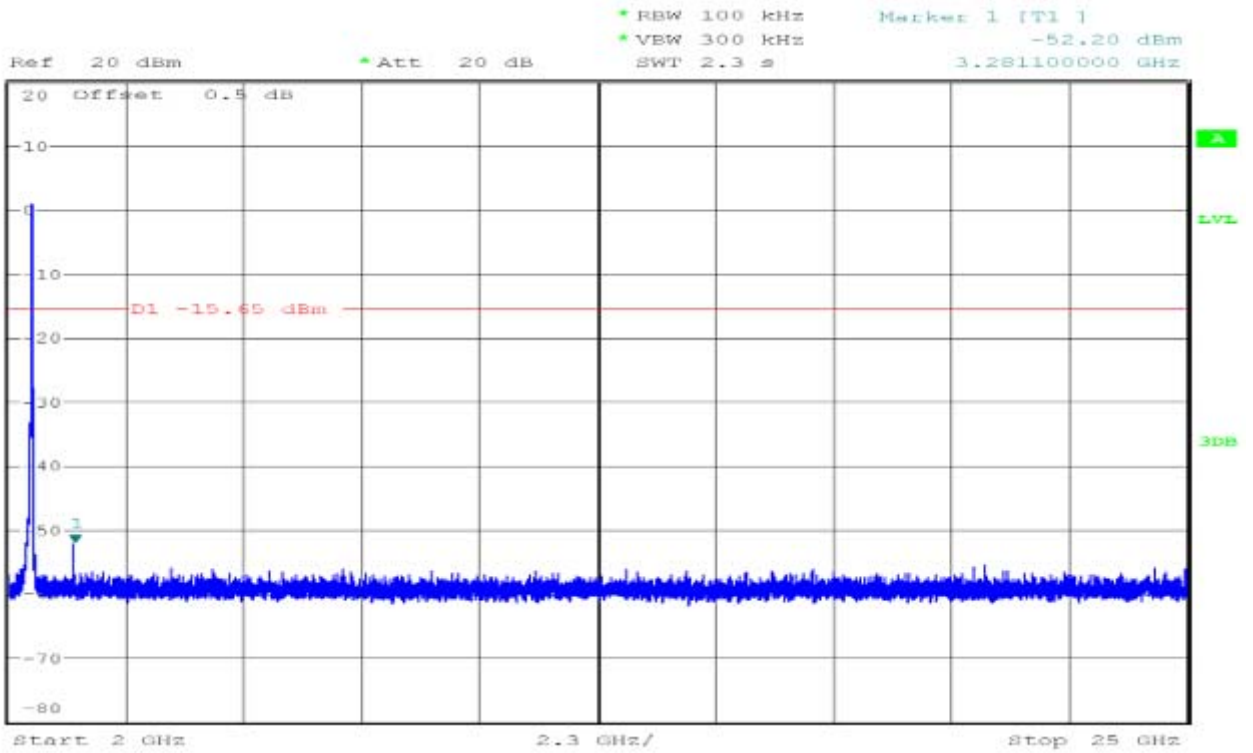


IEEE 802.11g mode/Chain 1


CH Low


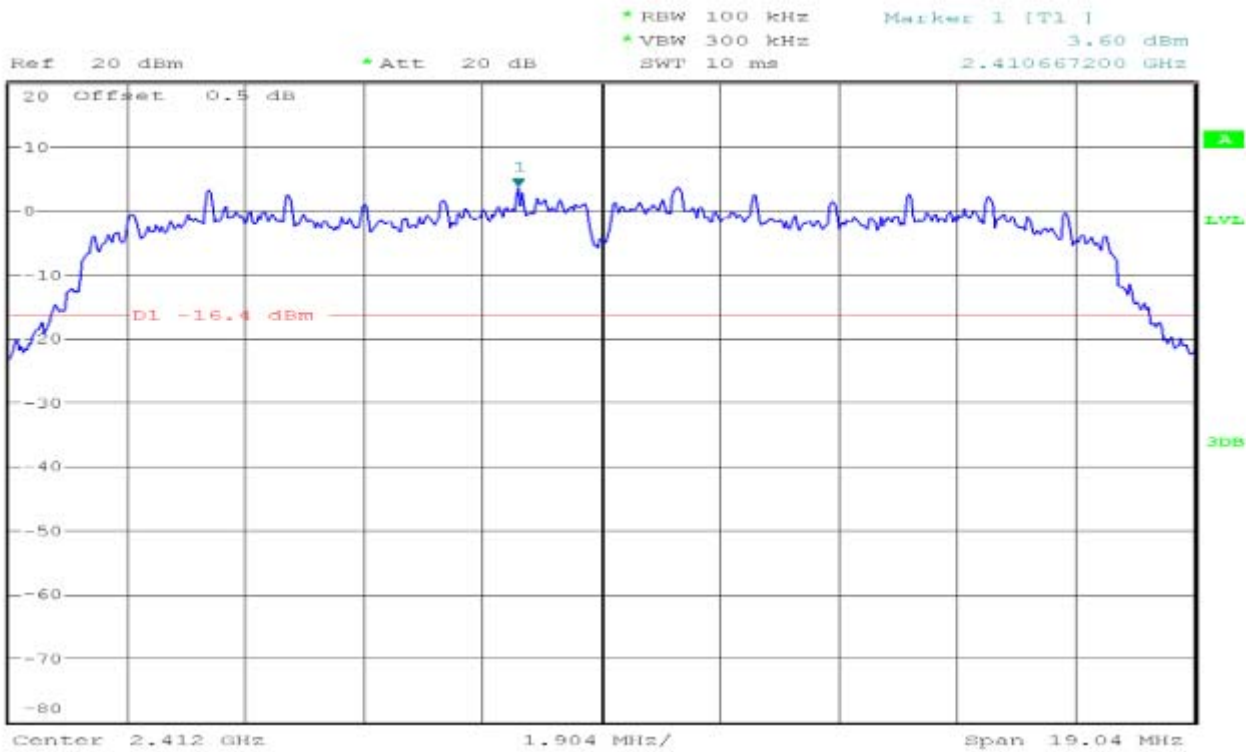


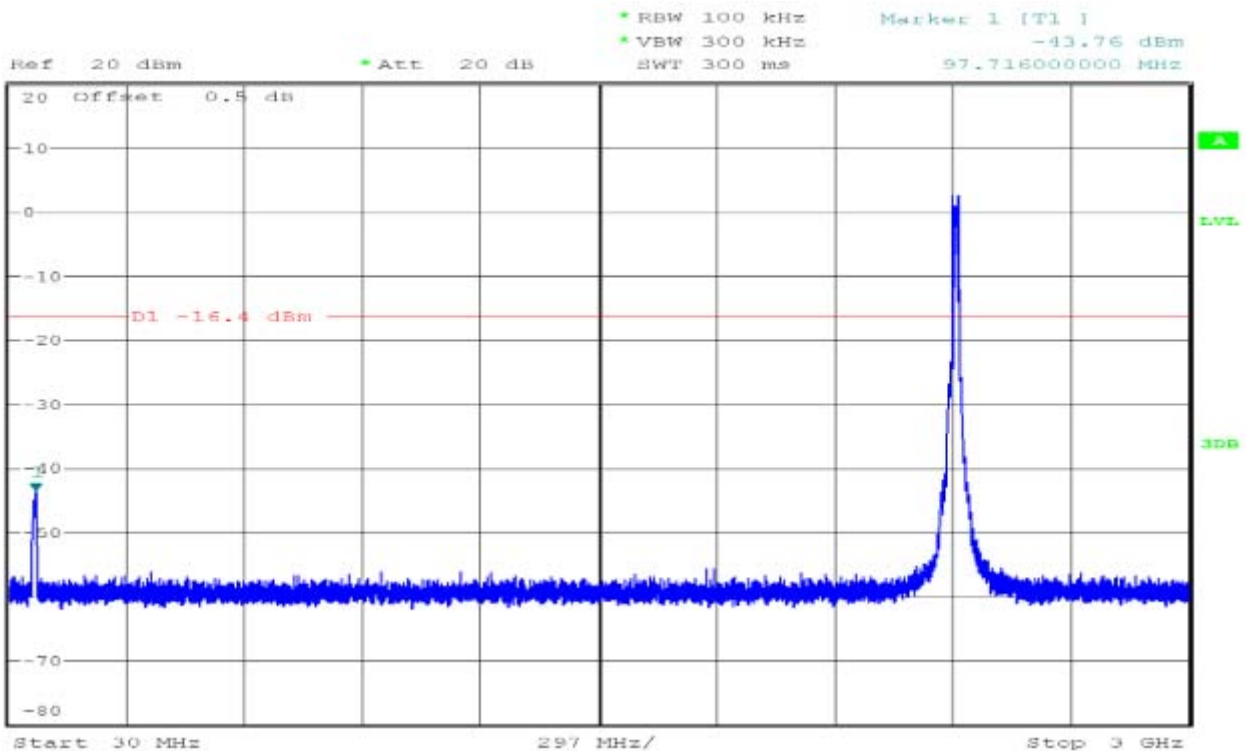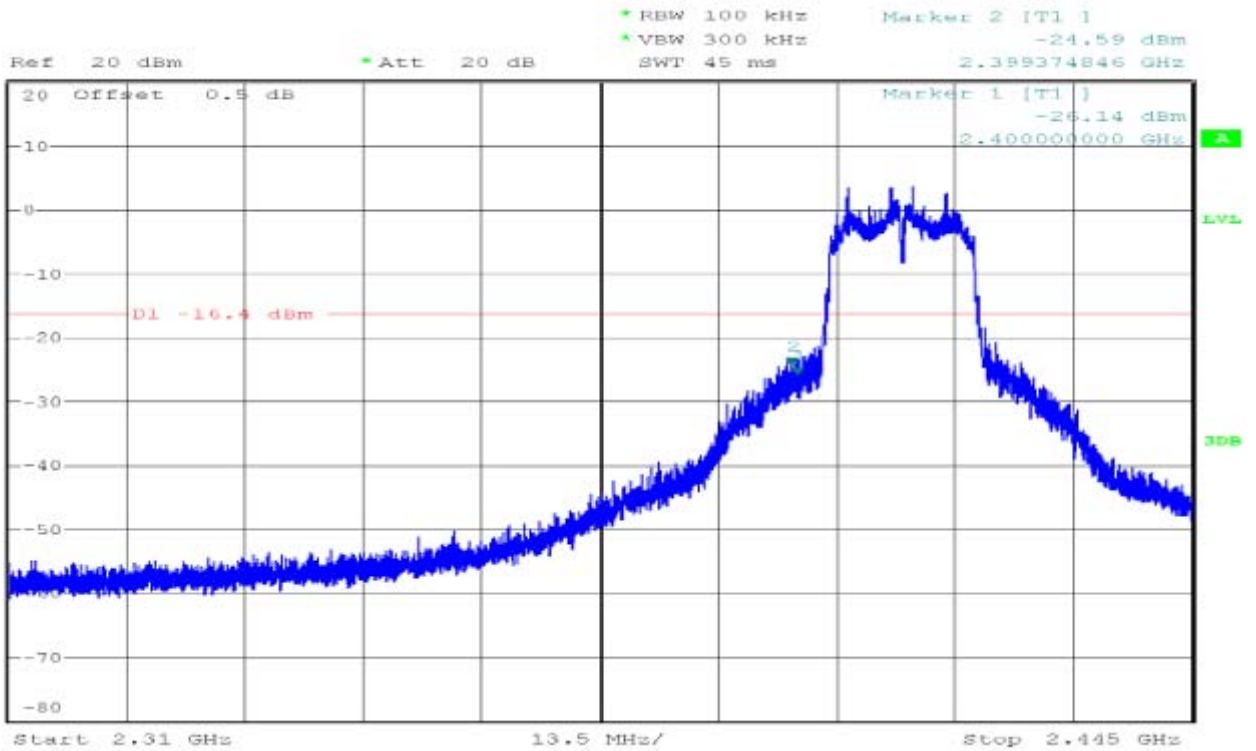


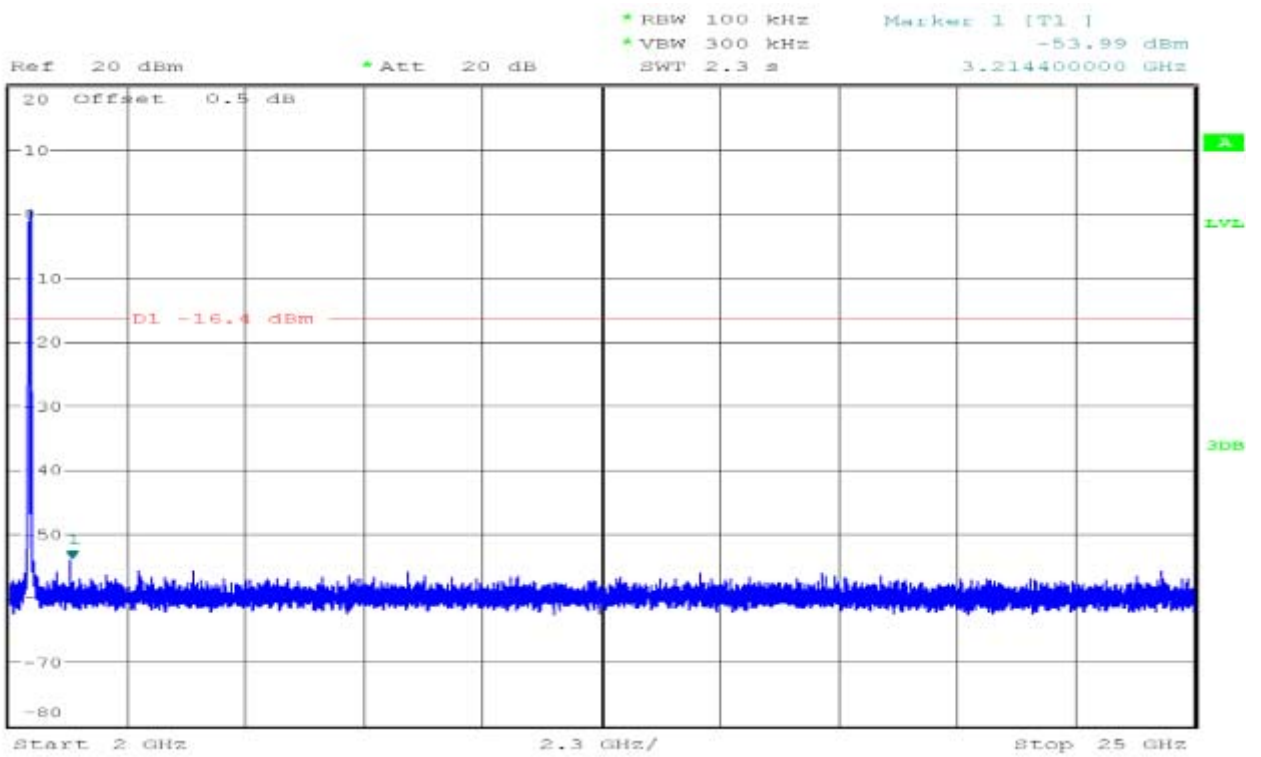




CH Mid

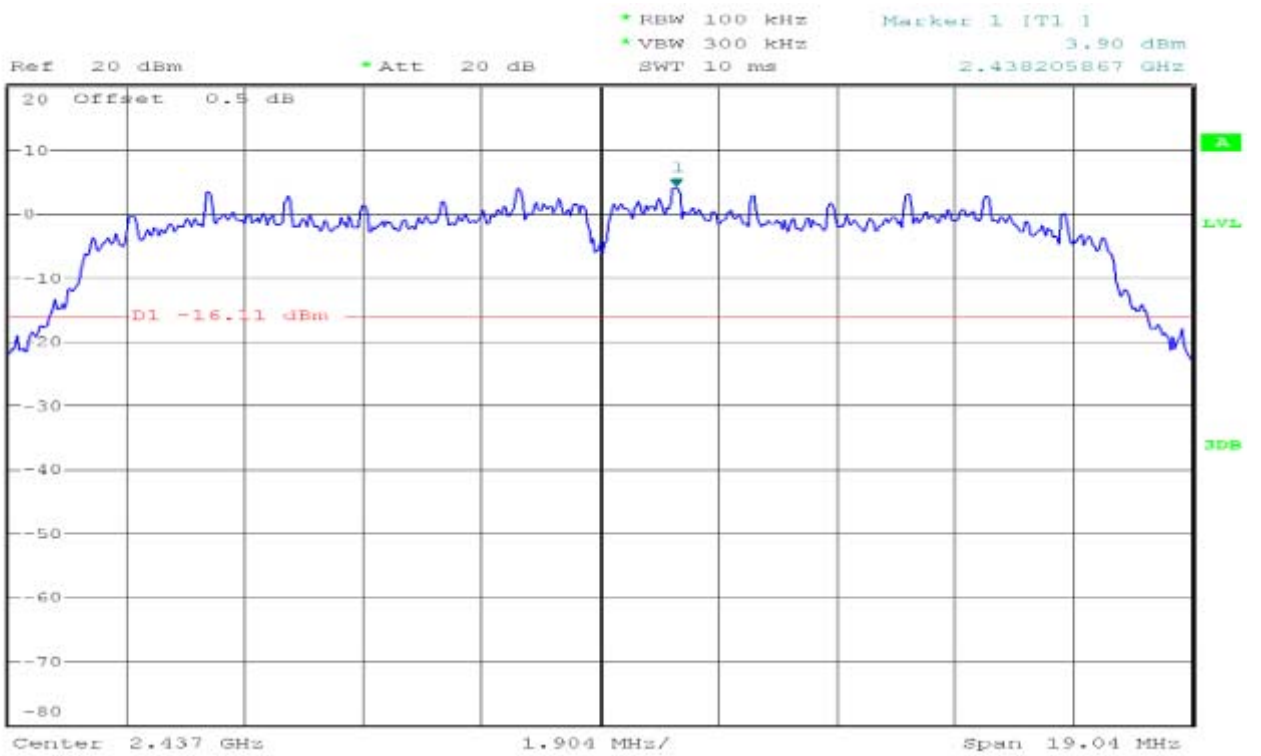

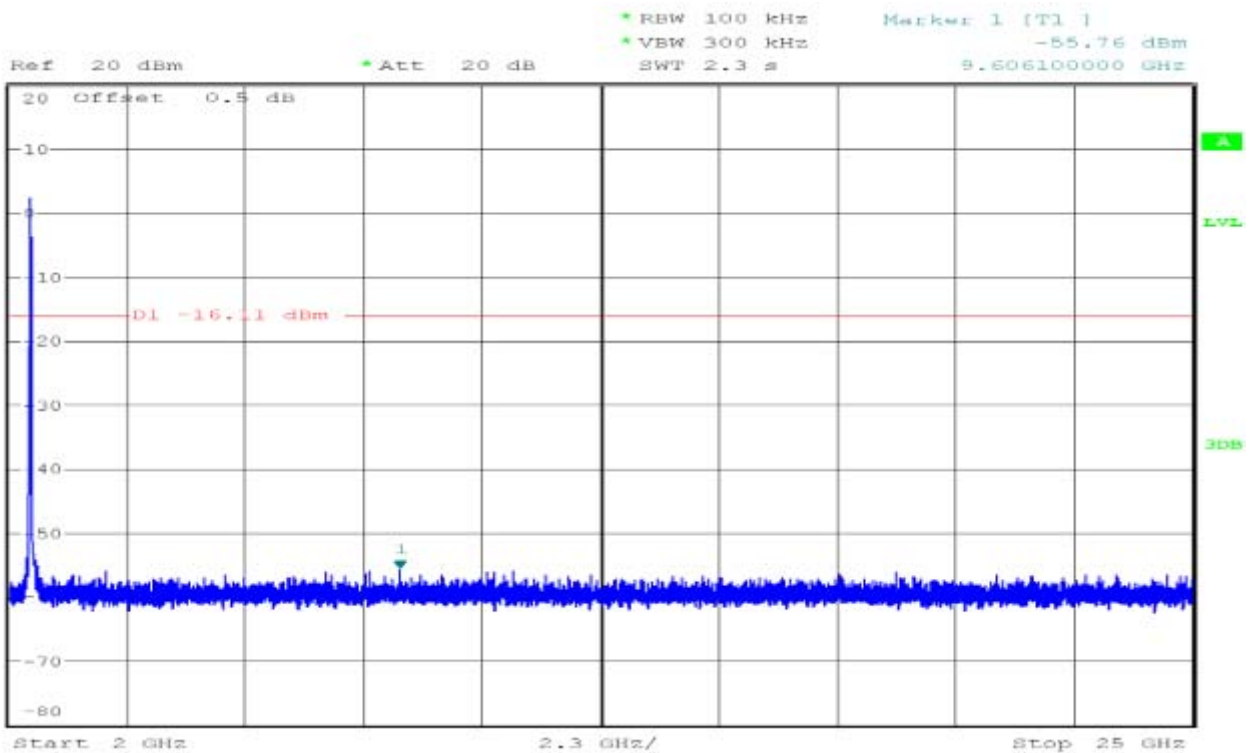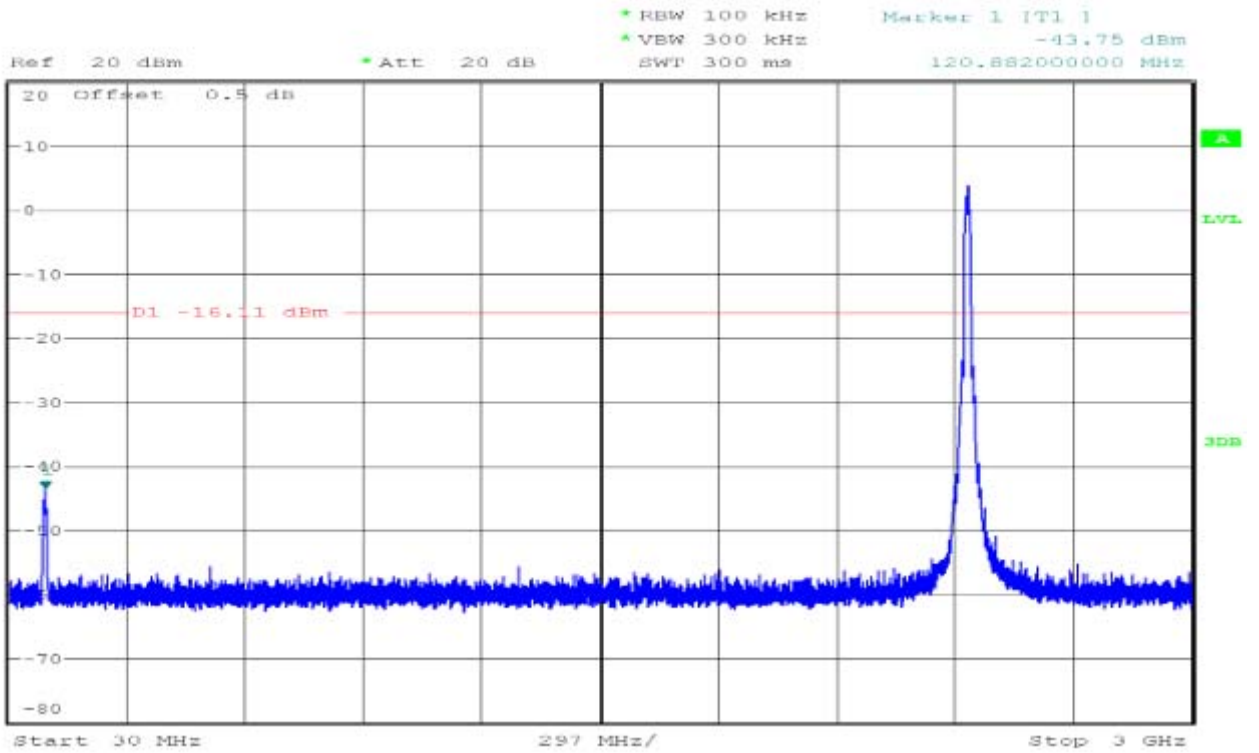



CH High

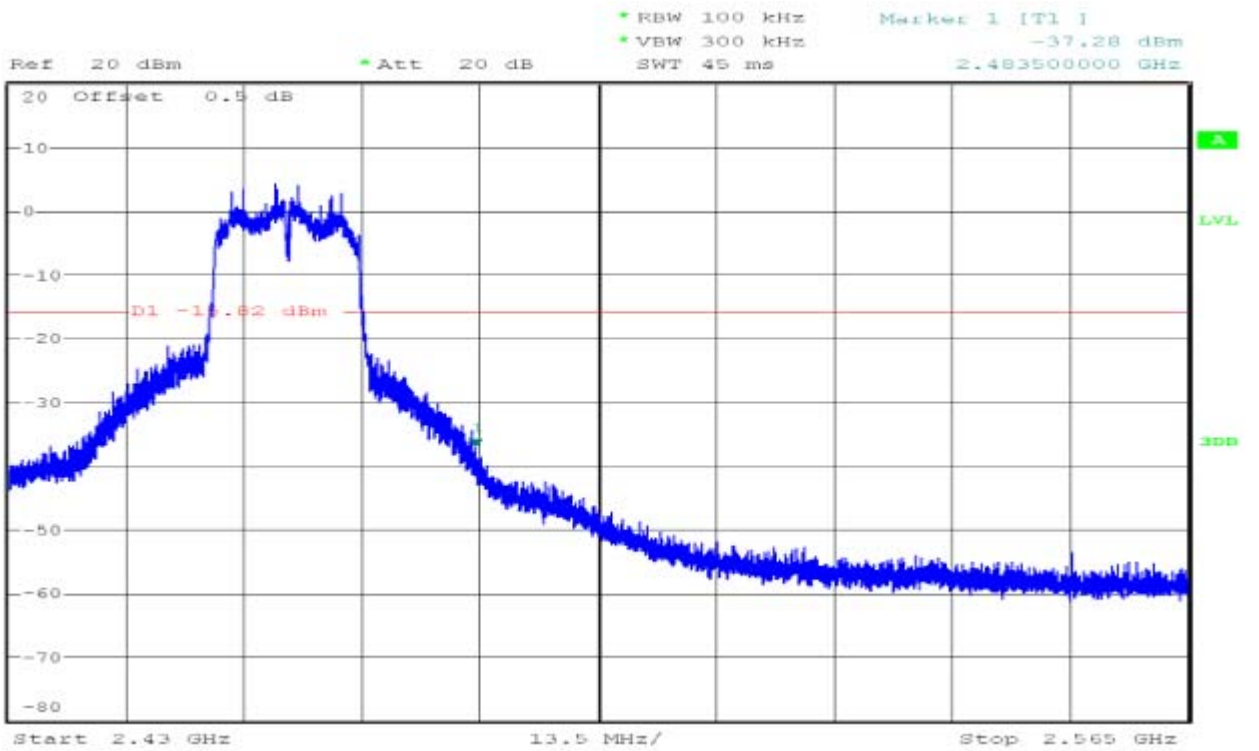
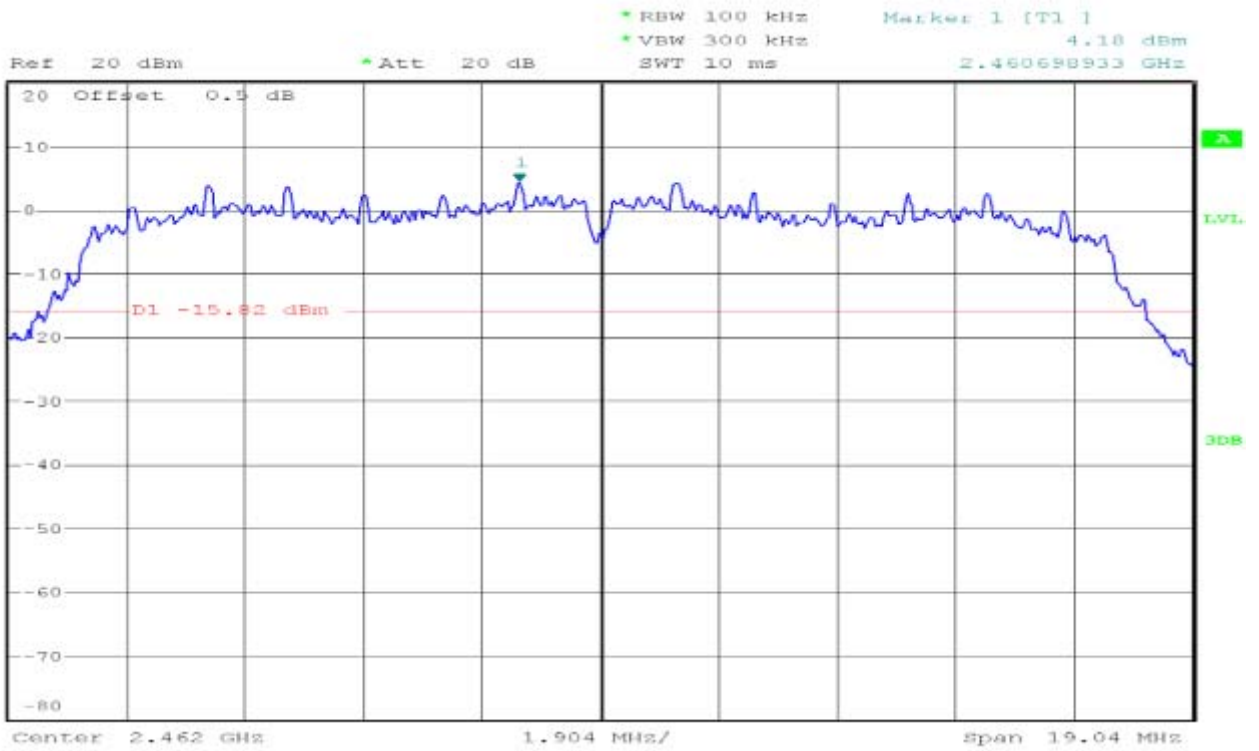


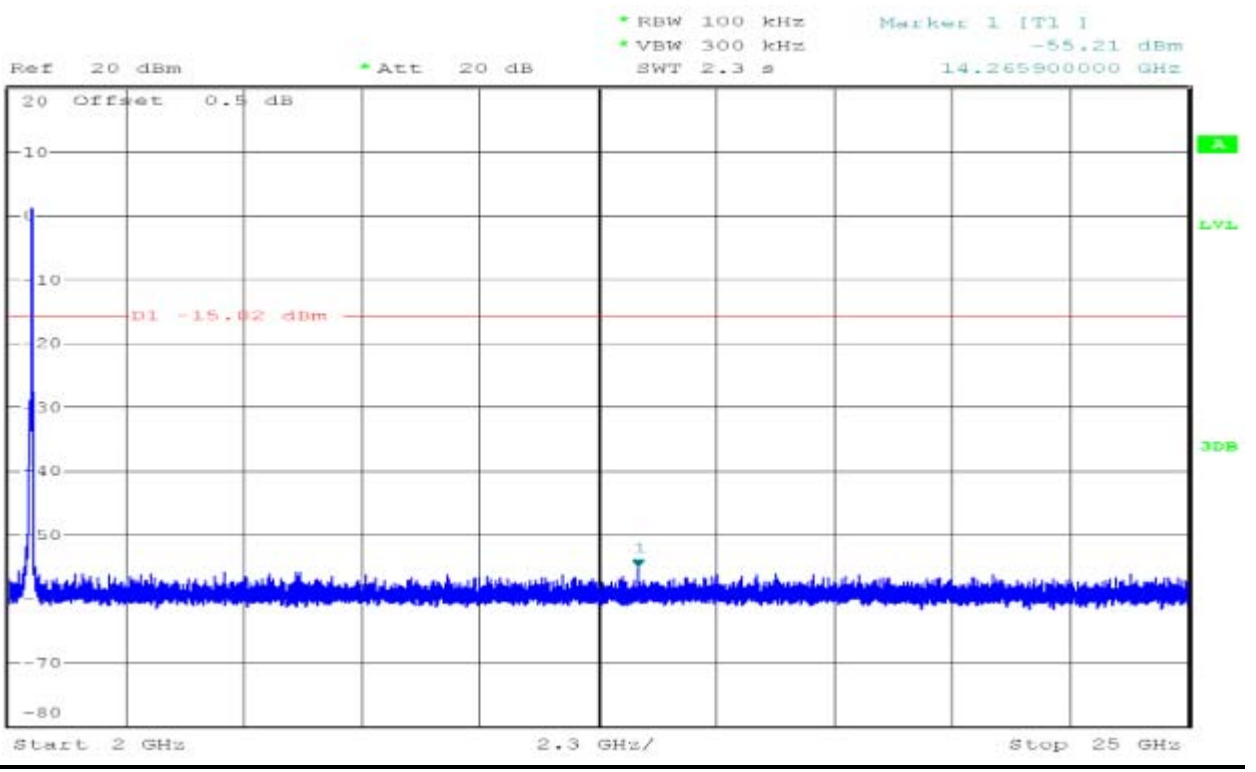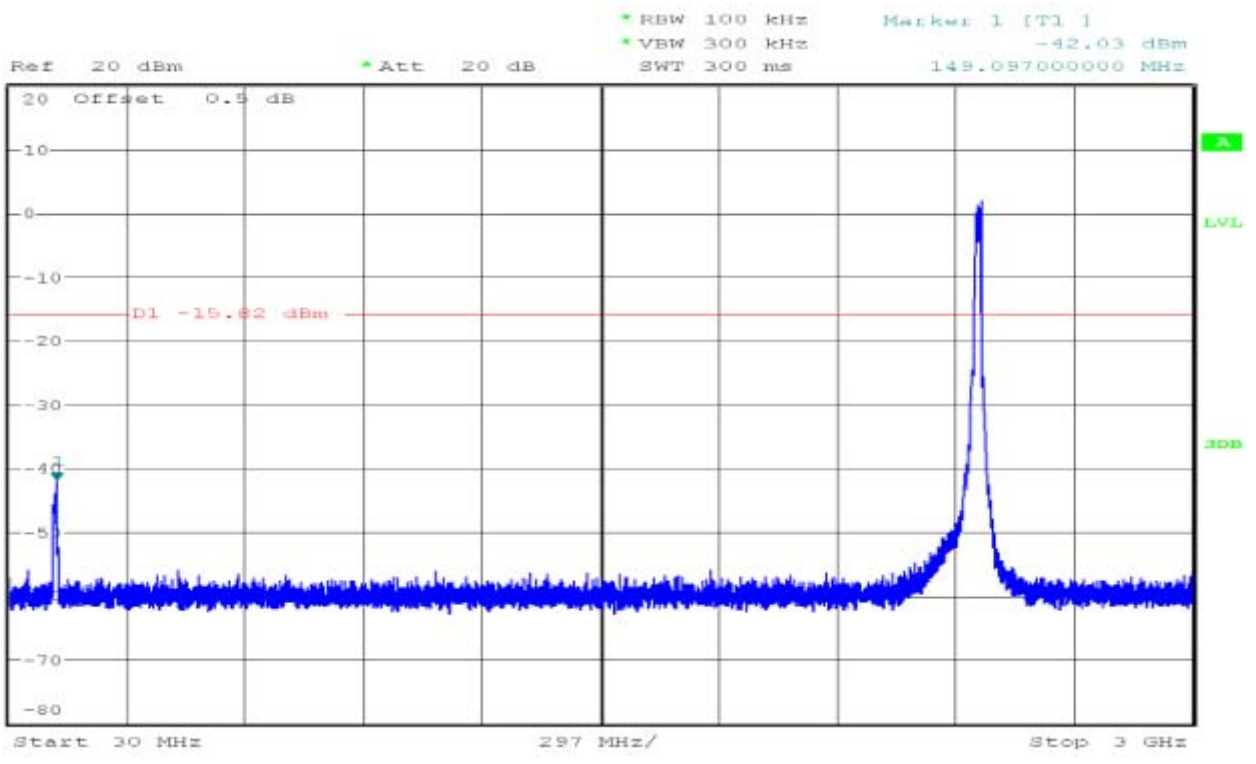



IEEE 802.11n HT20 mode/Chain 0


CH Low

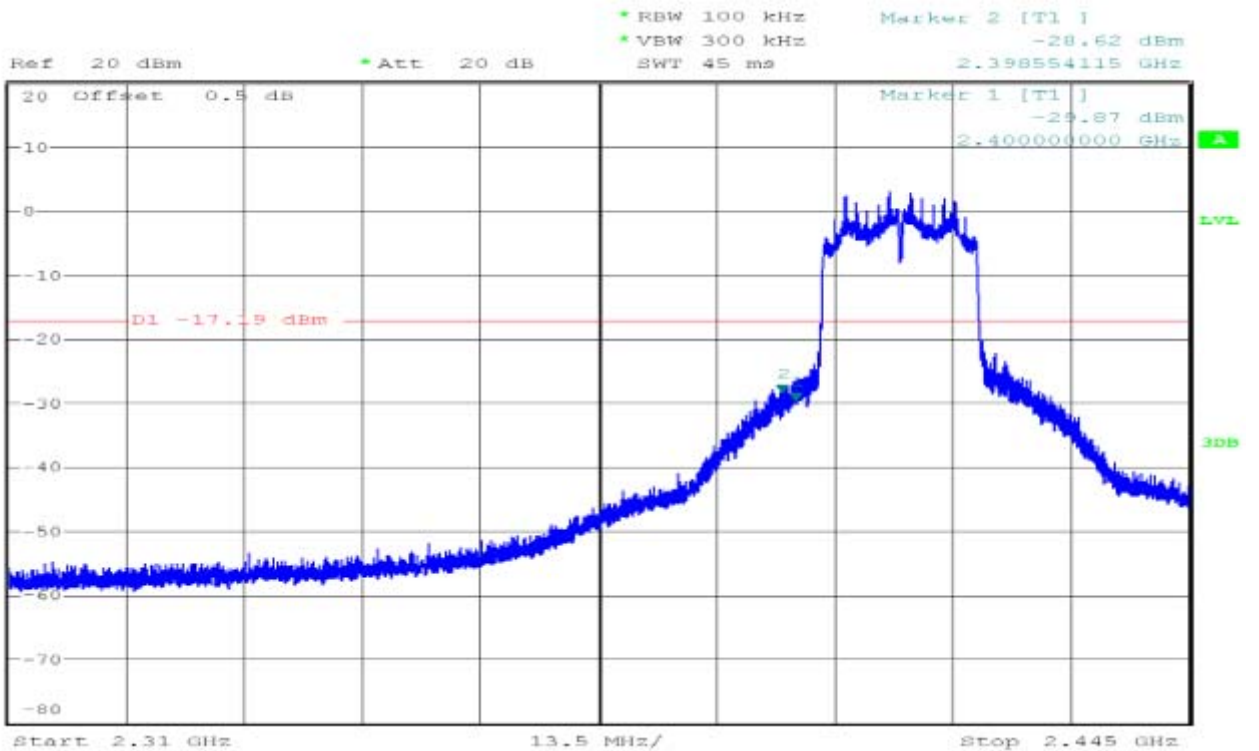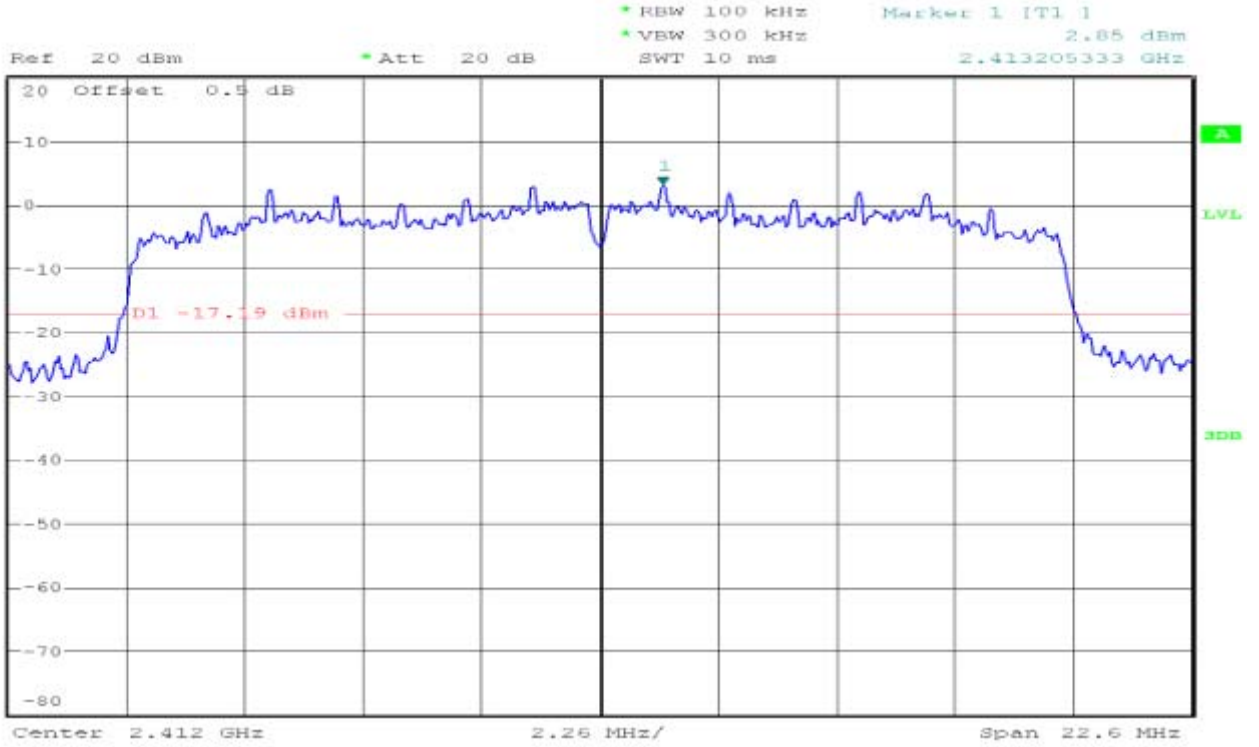

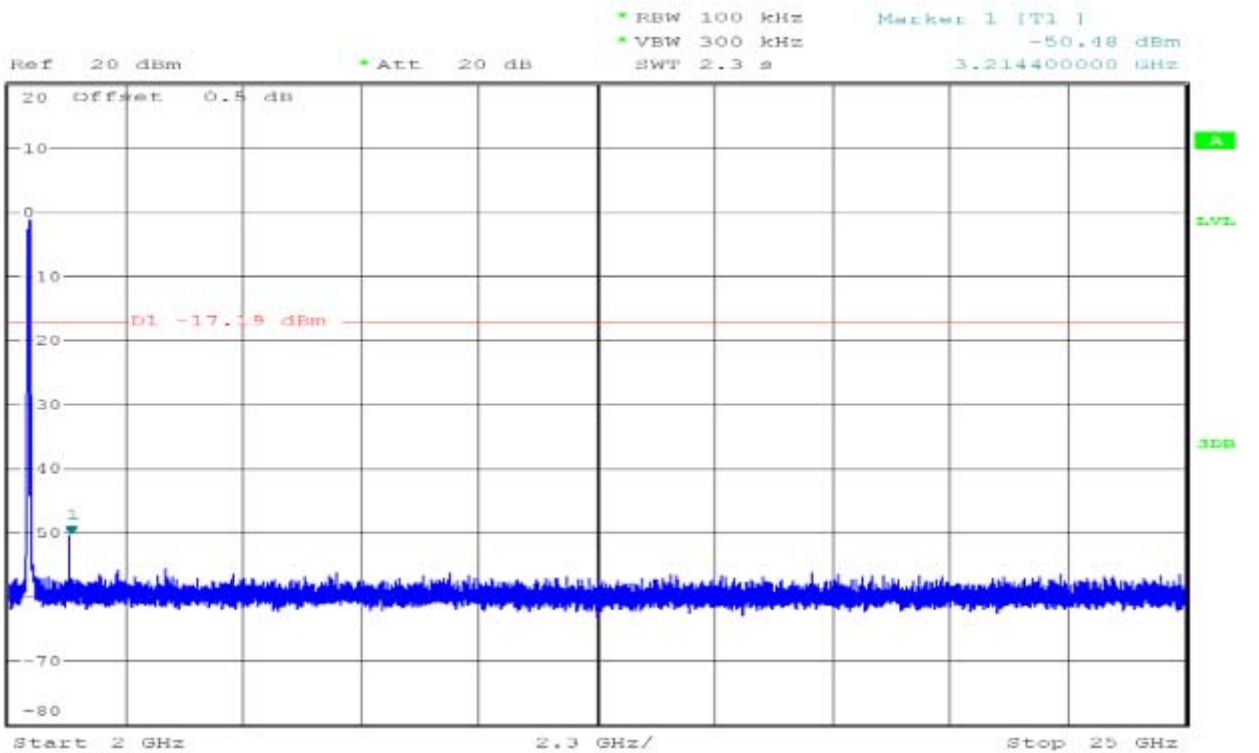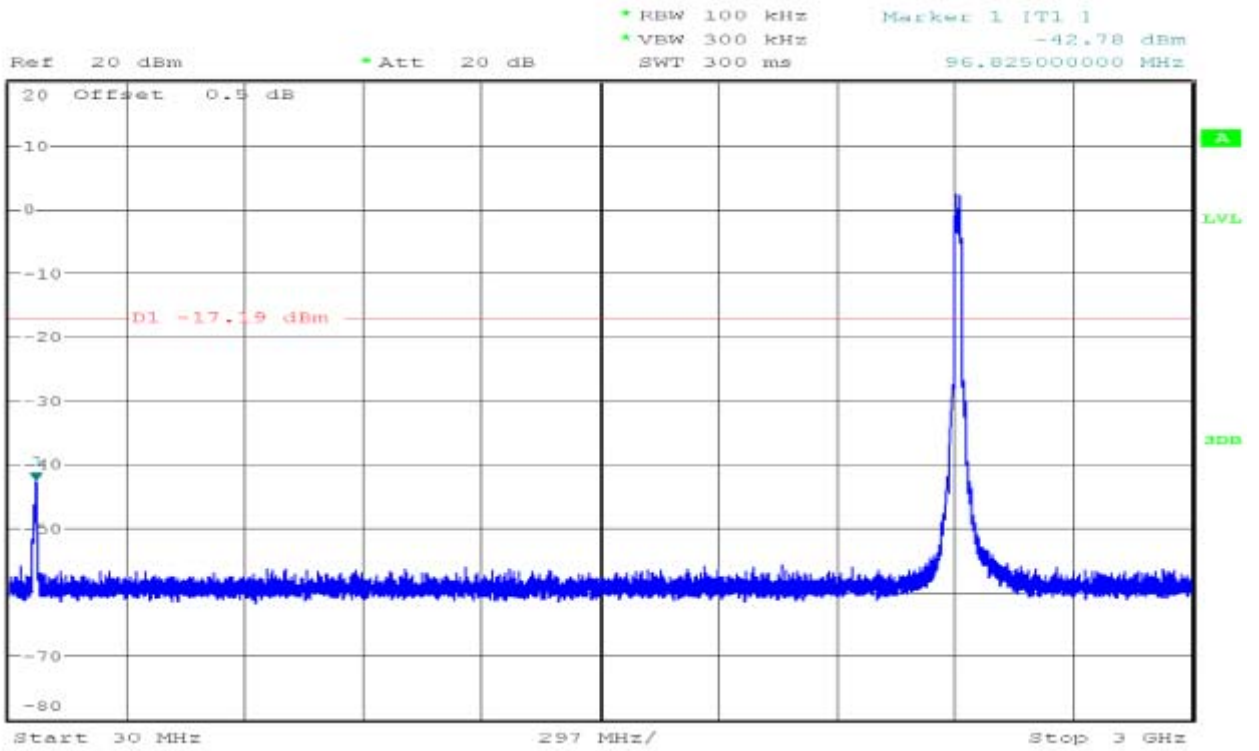




CH Mid

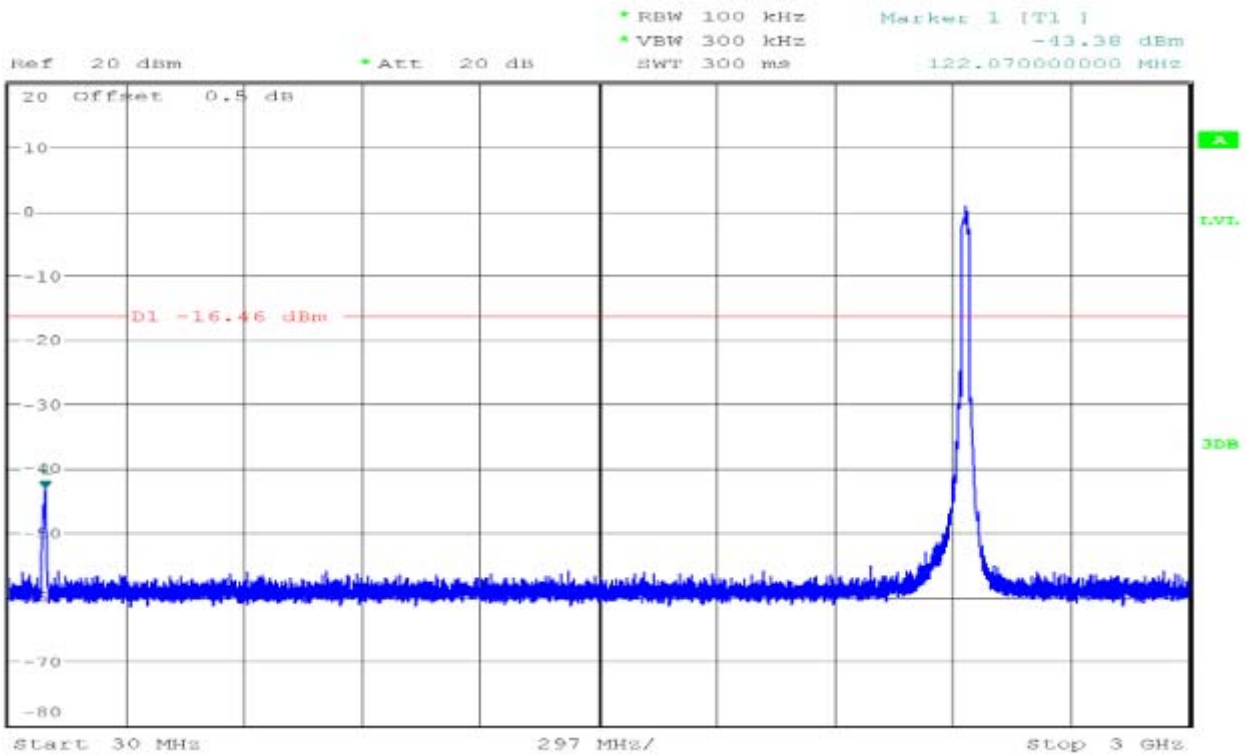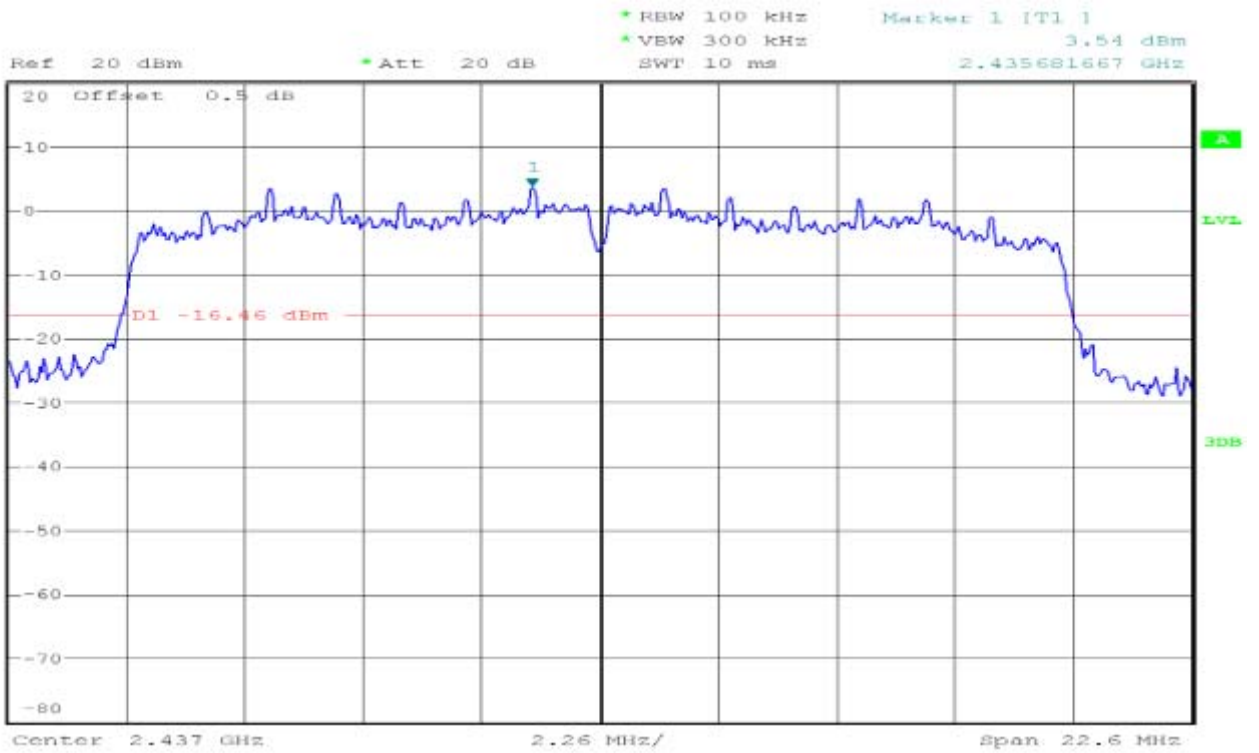


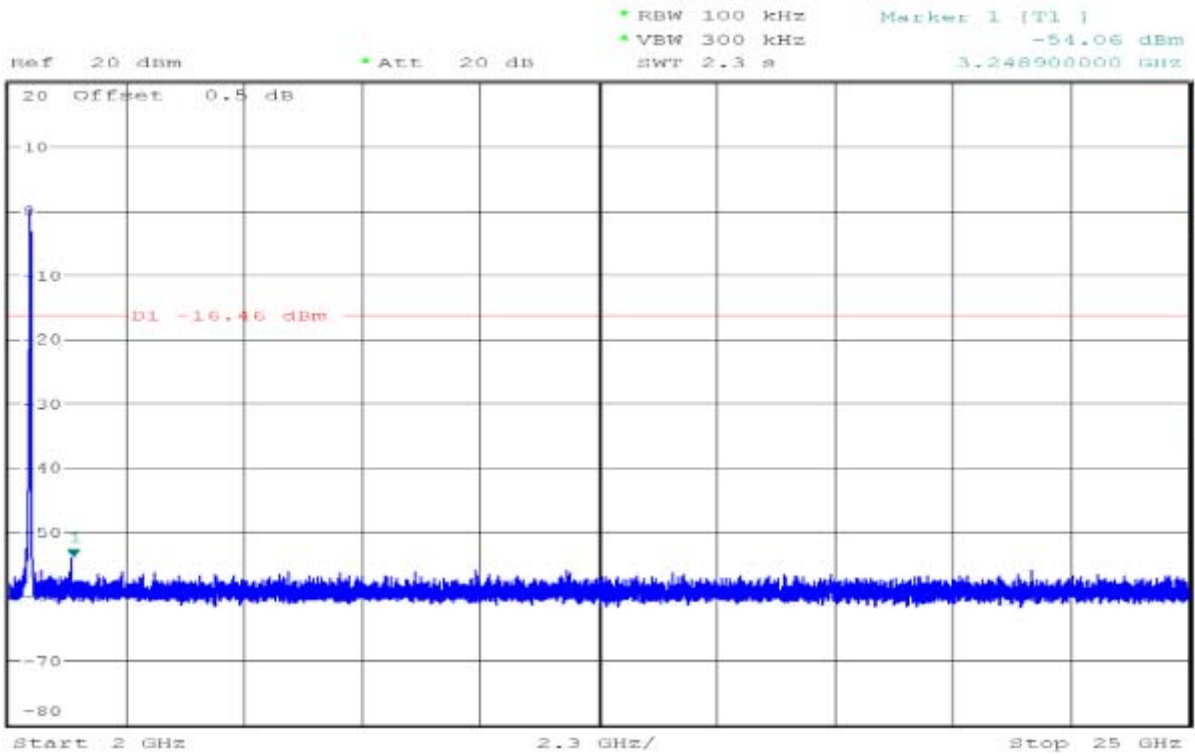

CH High

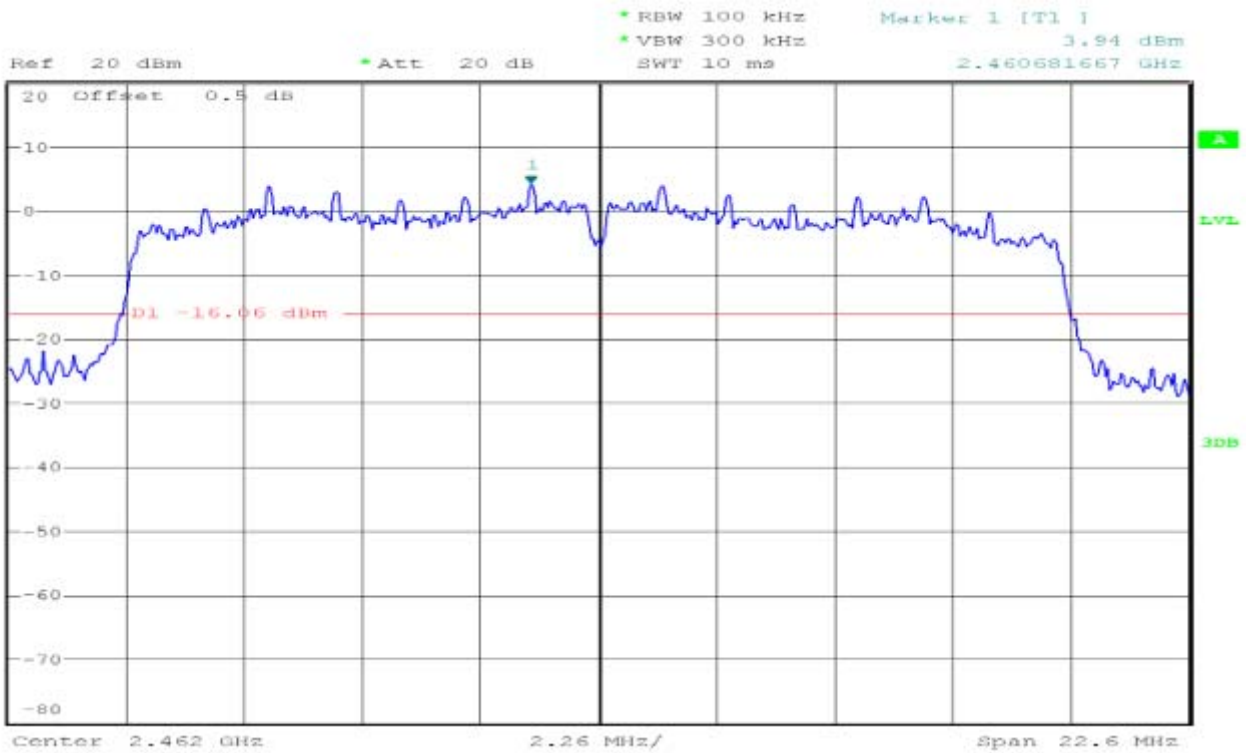


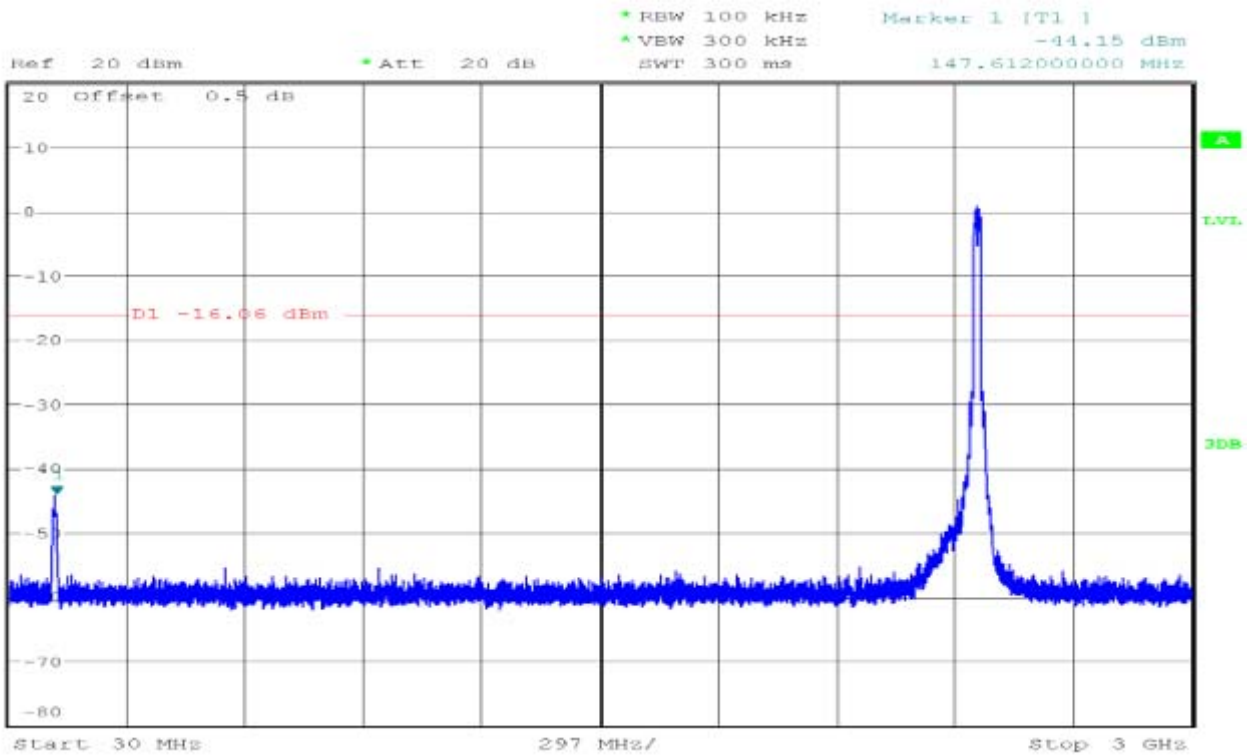
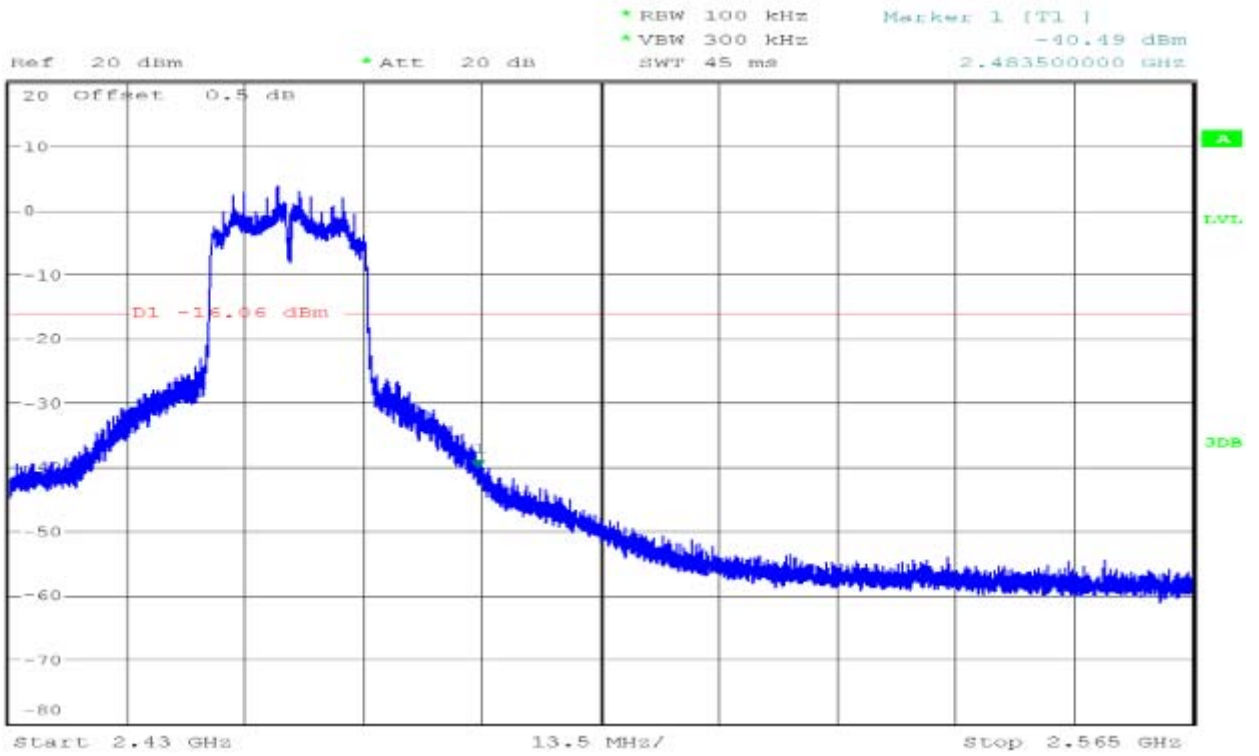


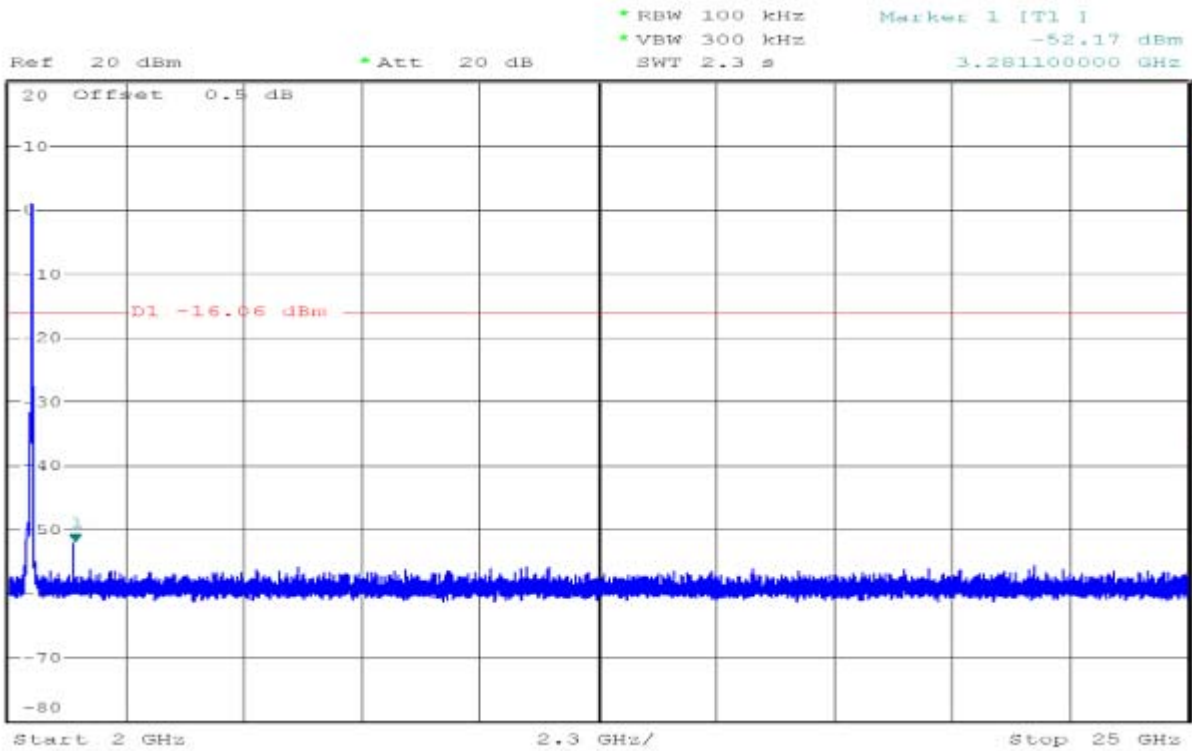


IEEE 802.11n HT20 mode/Chain 1


CH Low


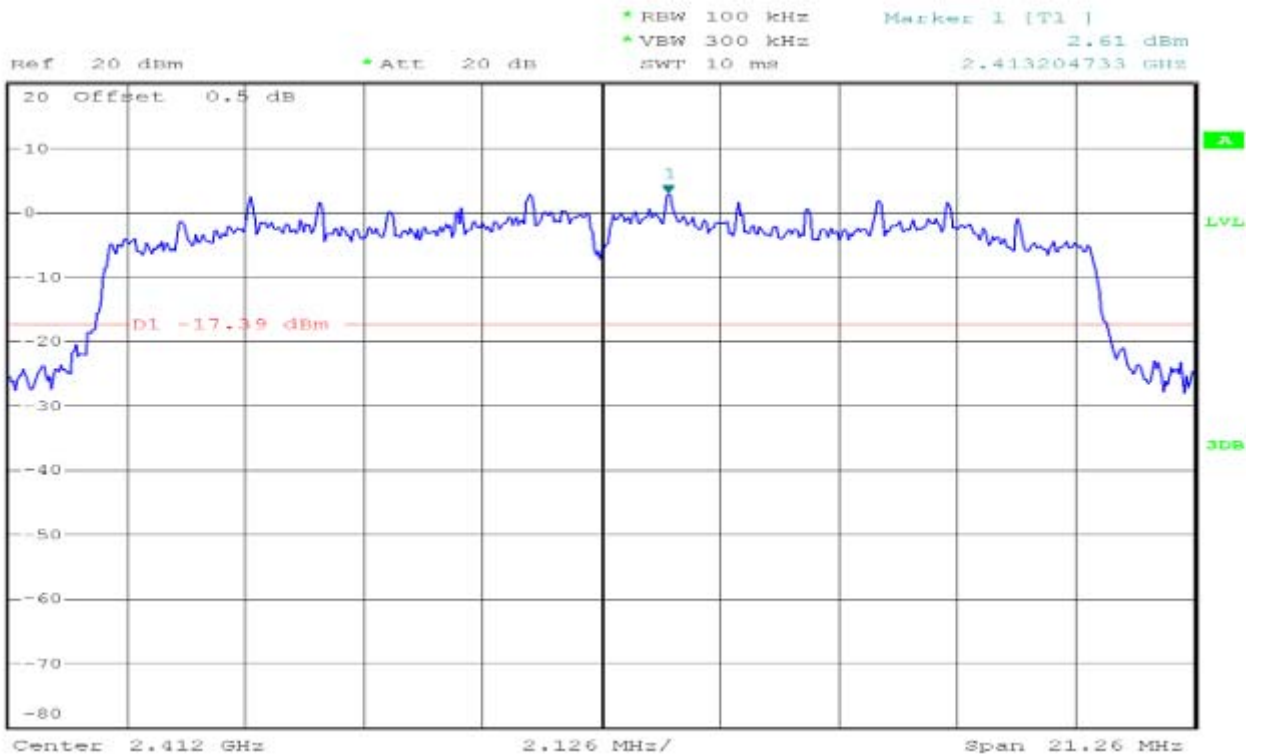


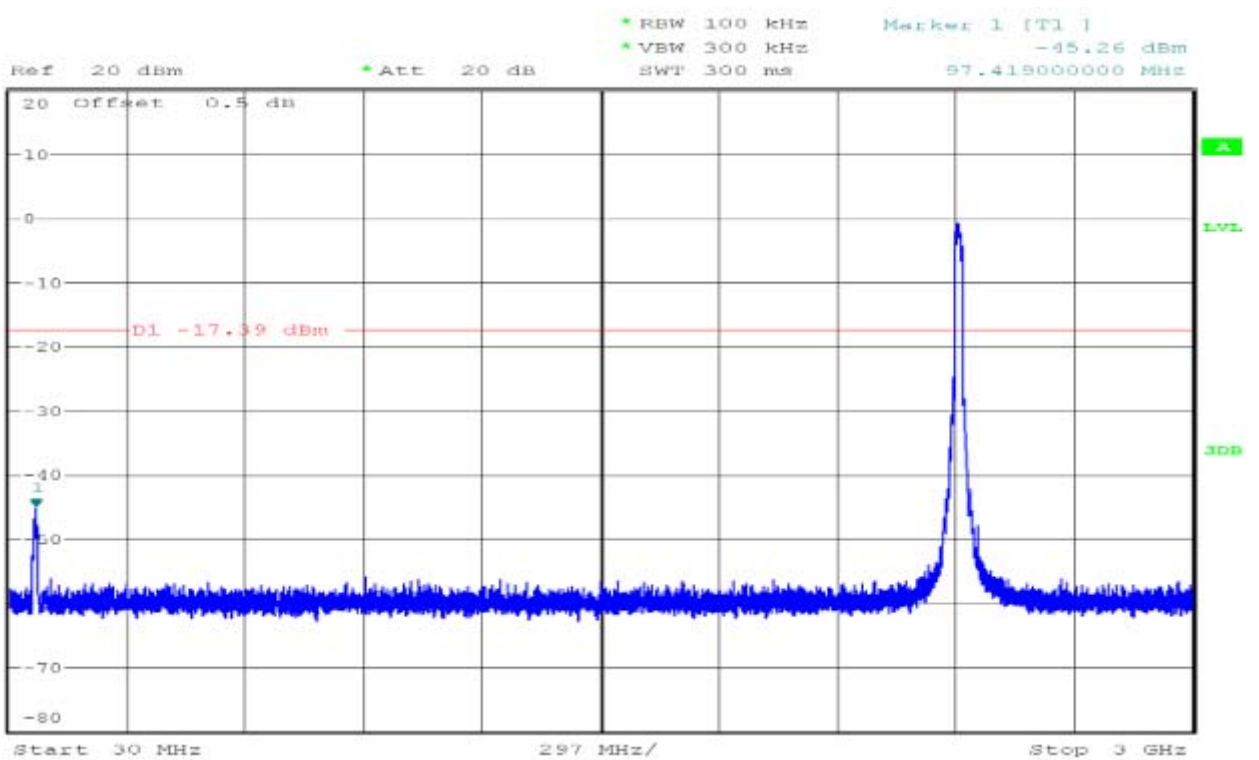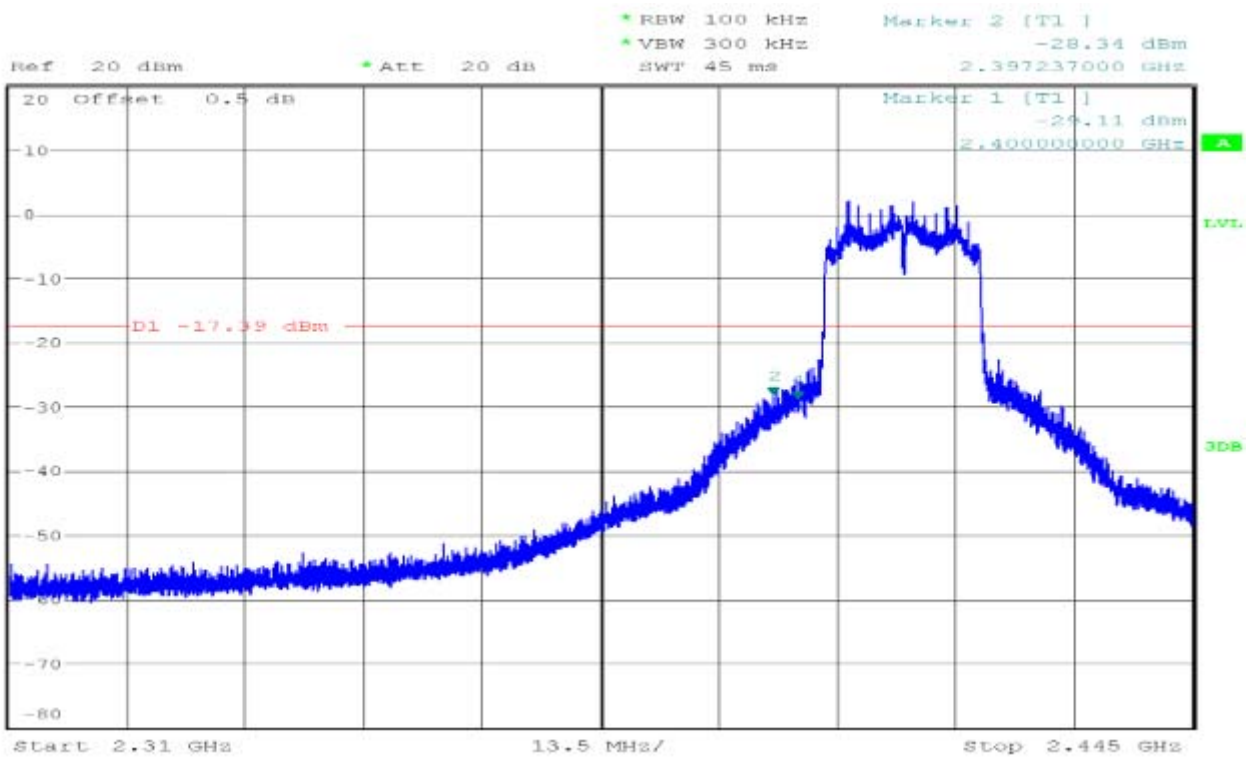


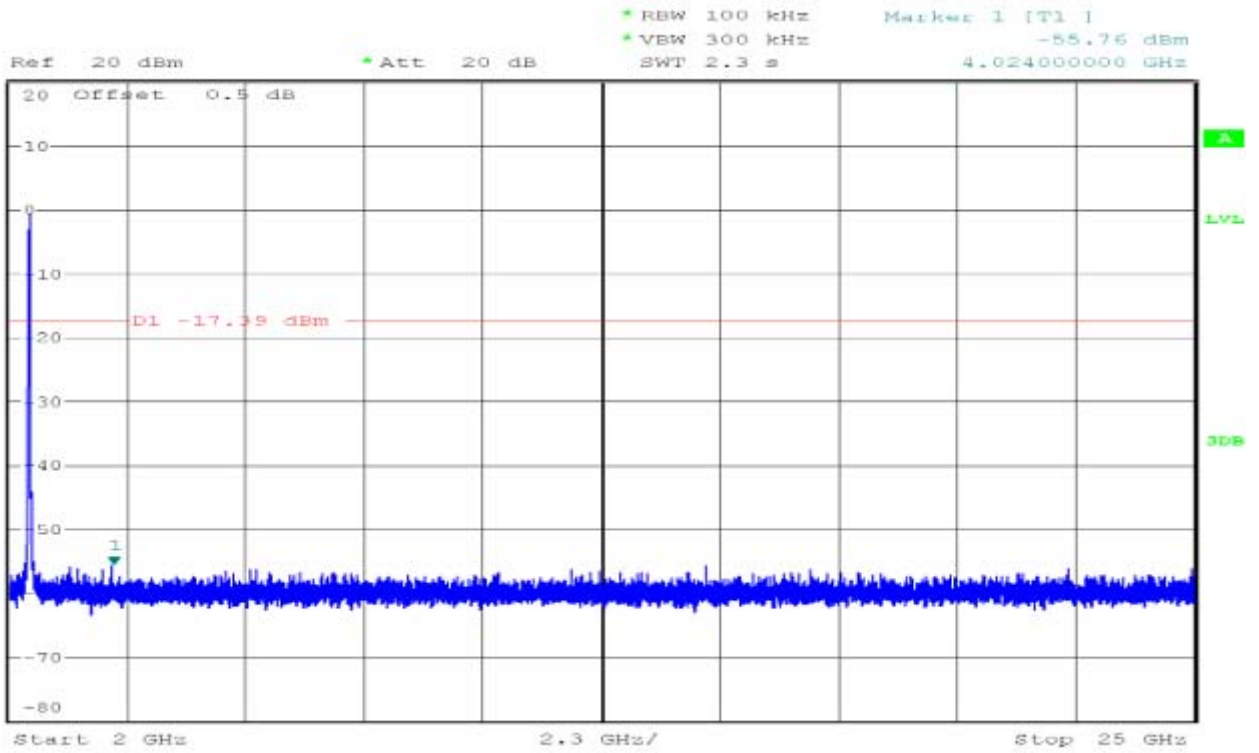




CH Mid

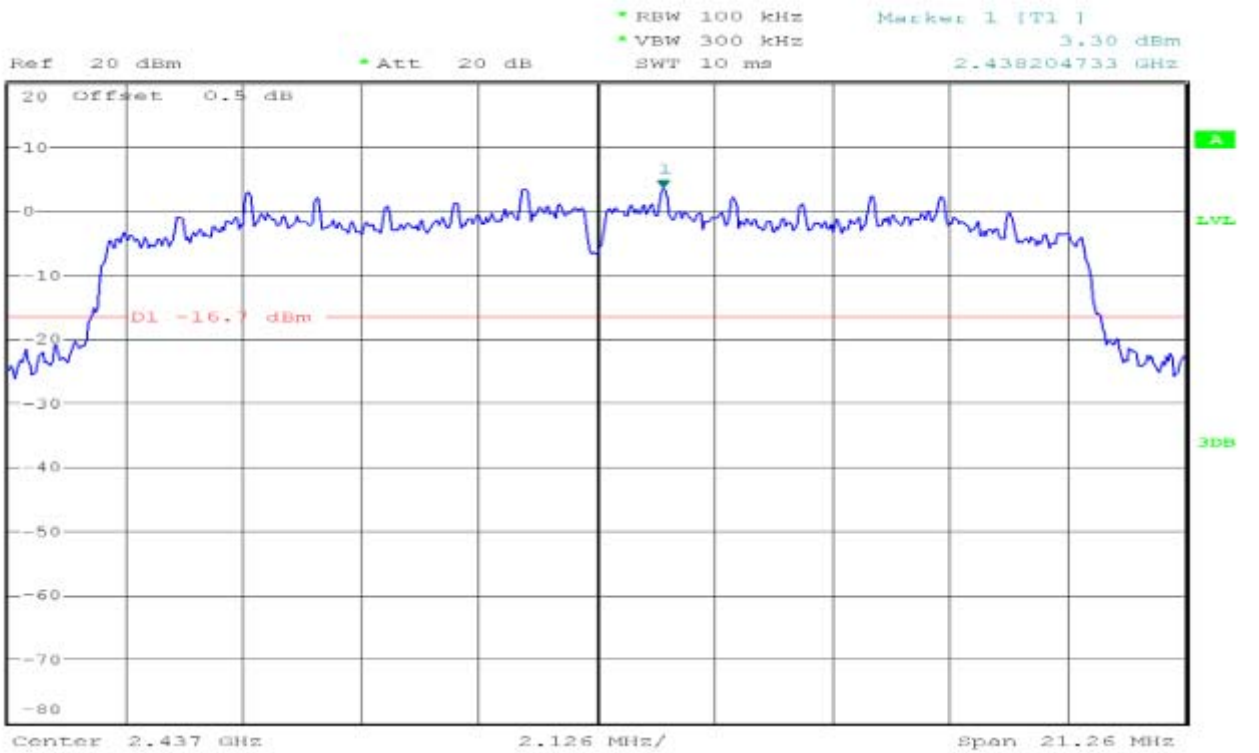

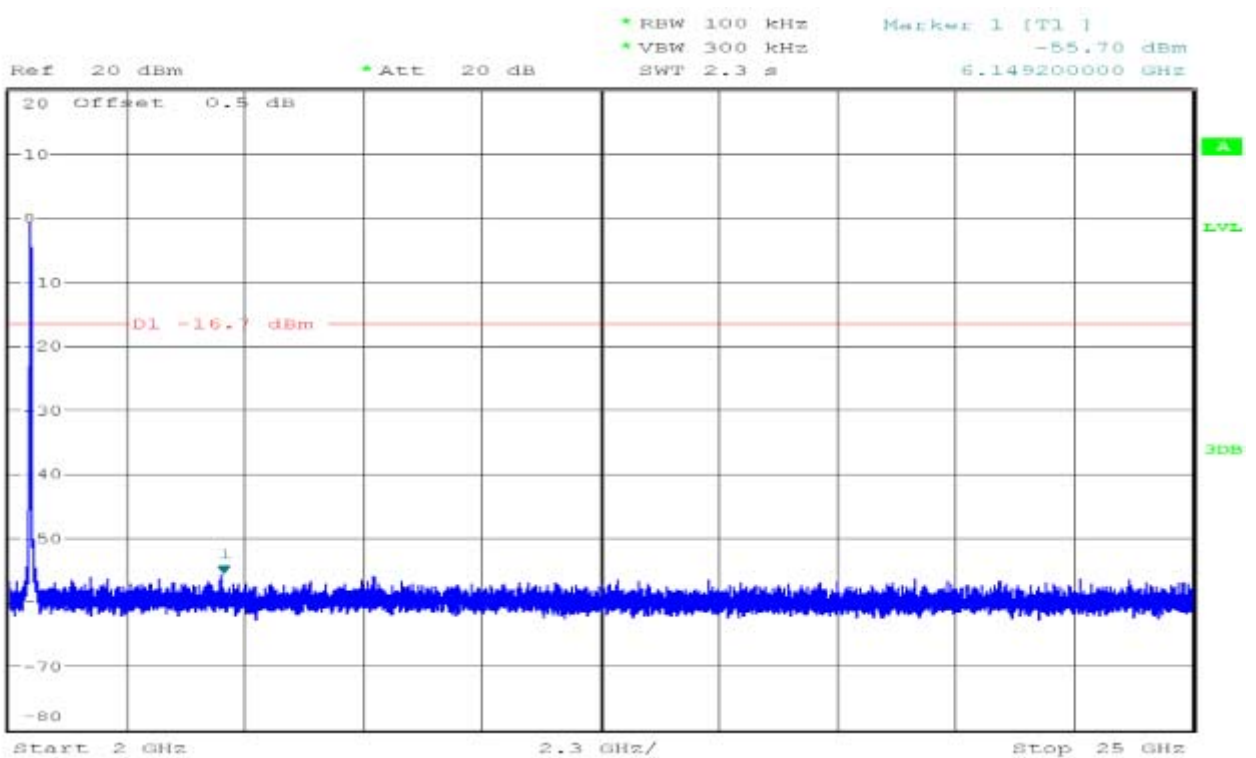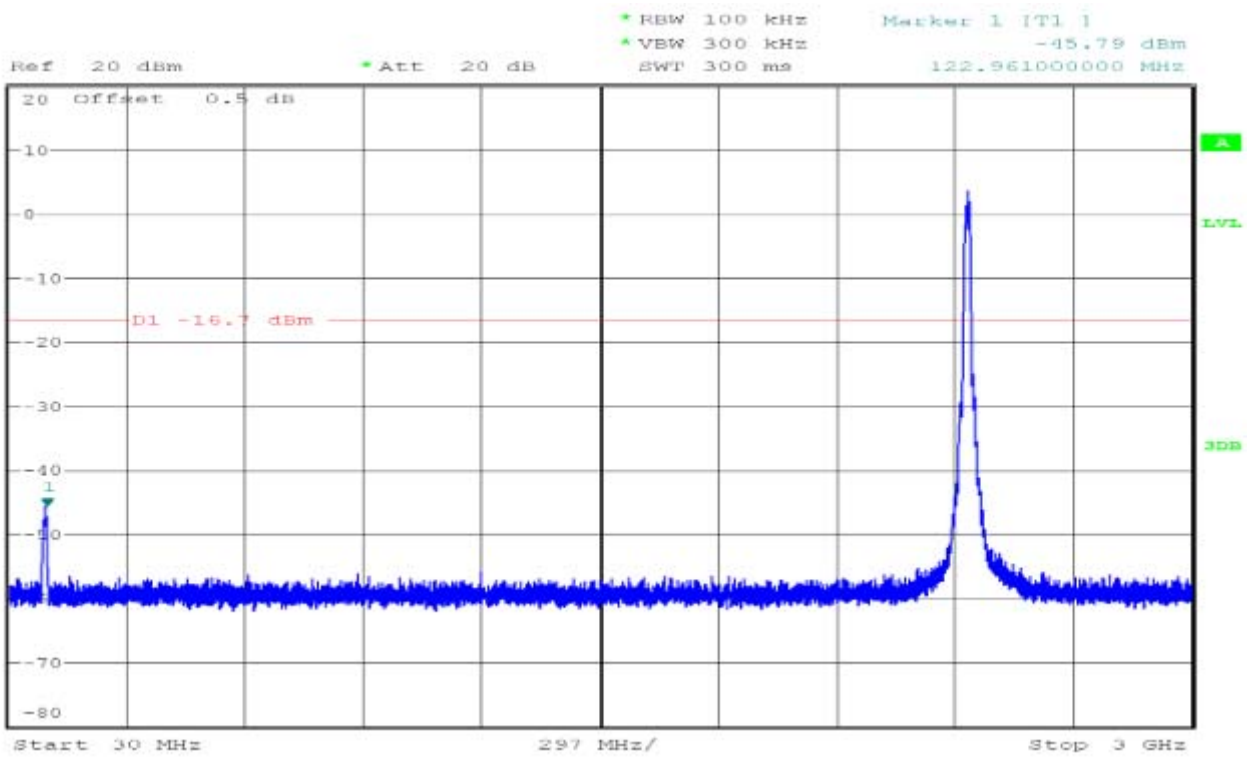



CH High

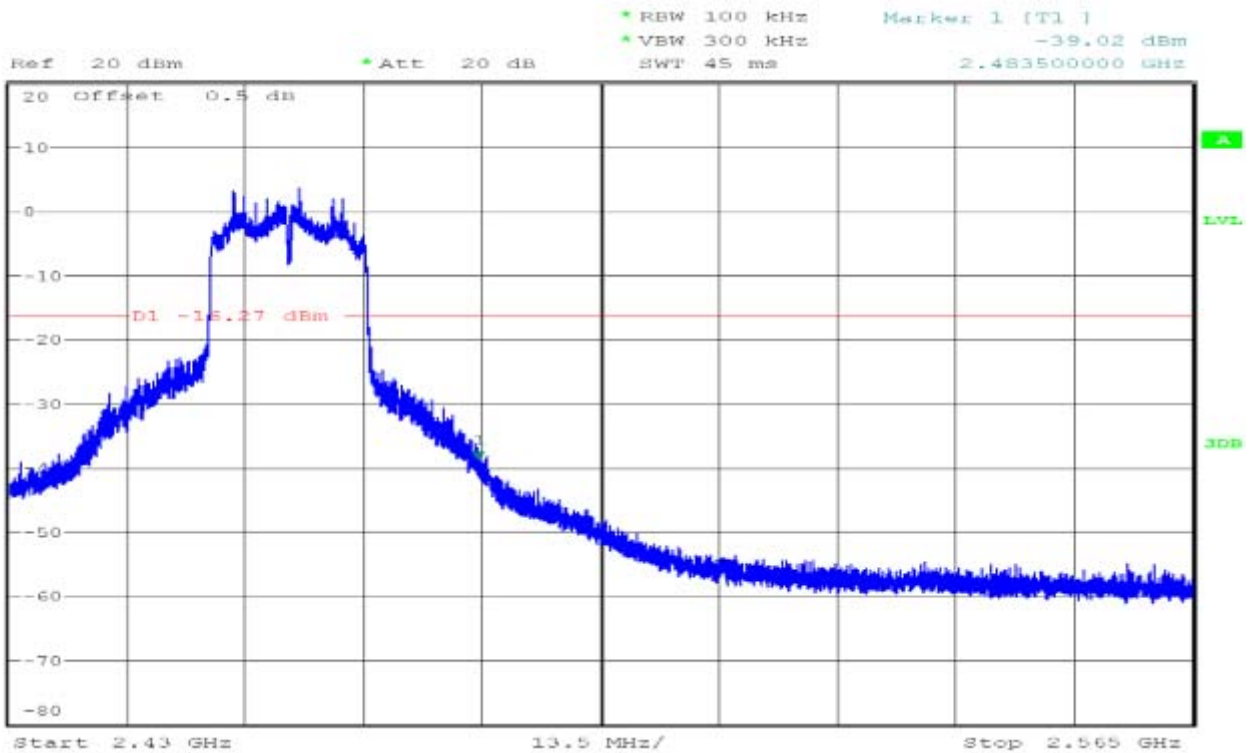
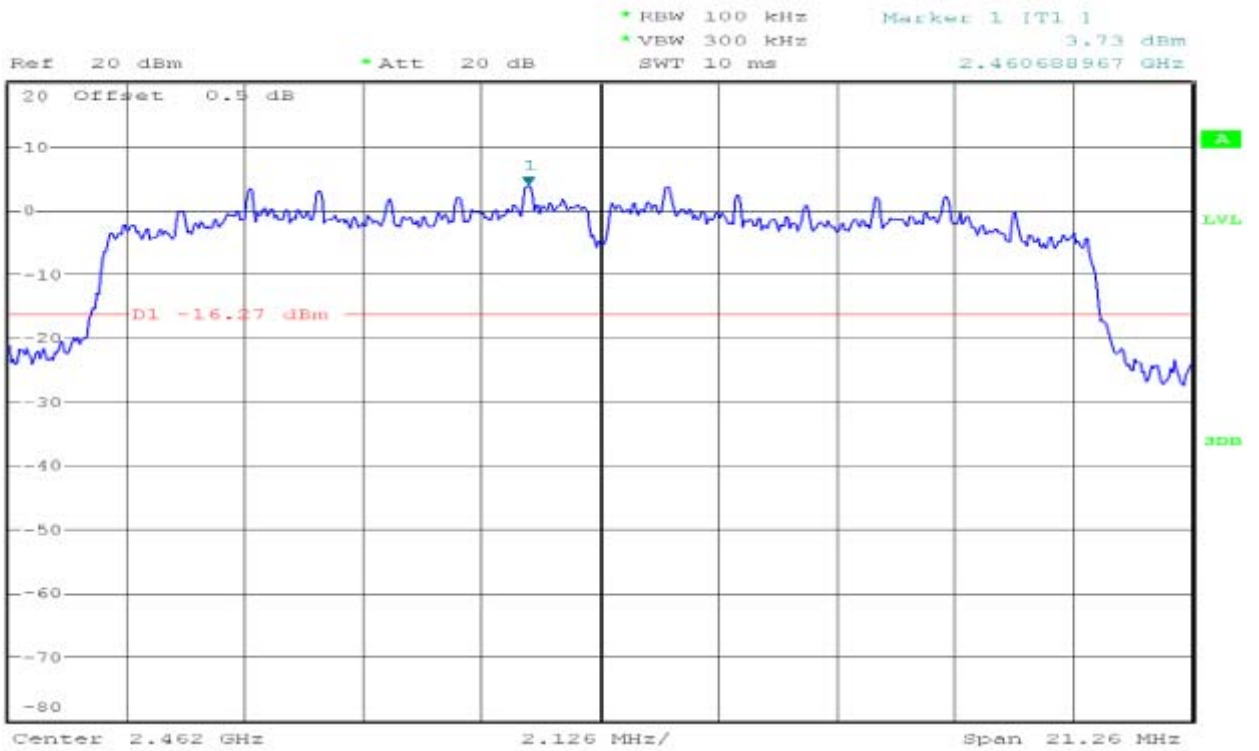


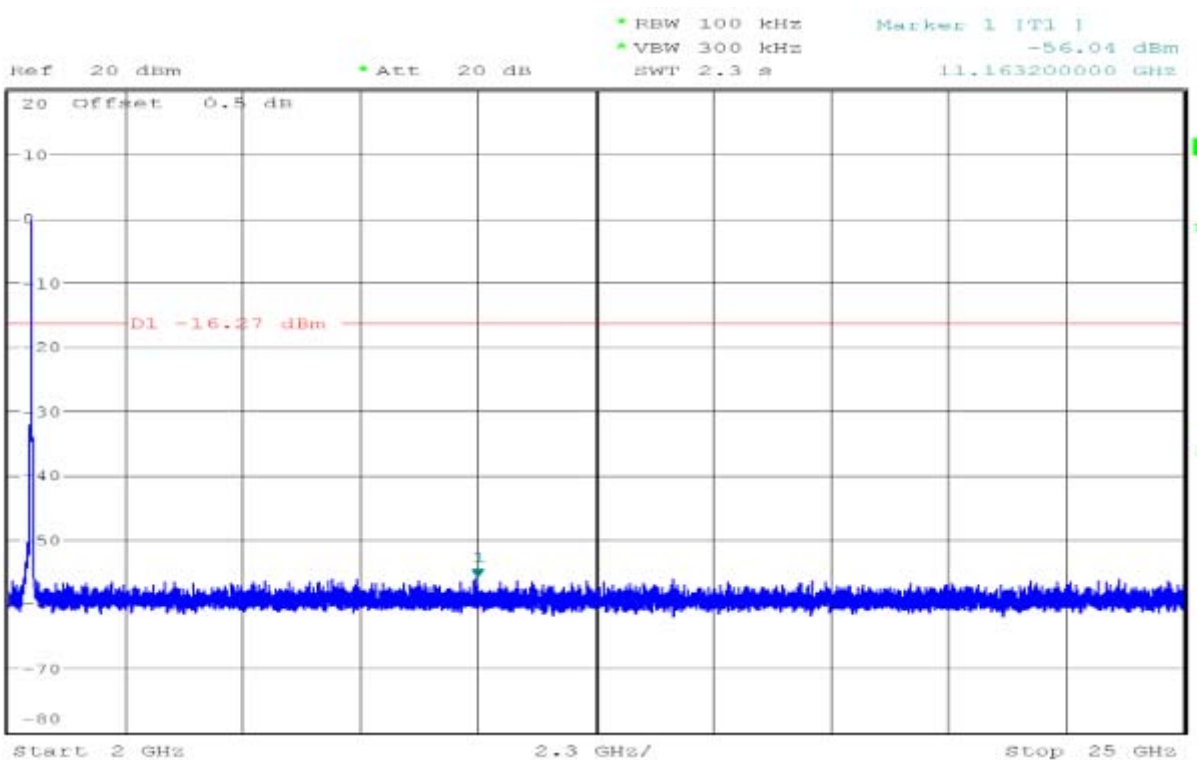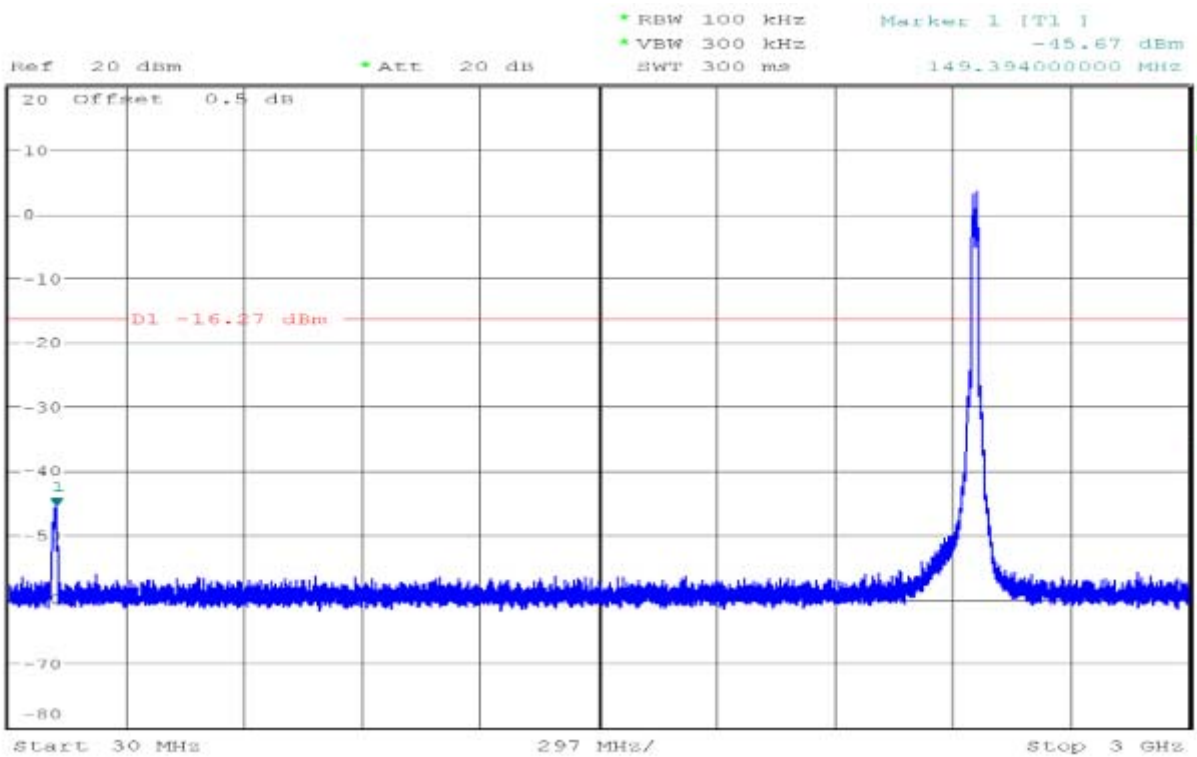



IEEE 802.11n HT40 mode/Chain 0


CH Low

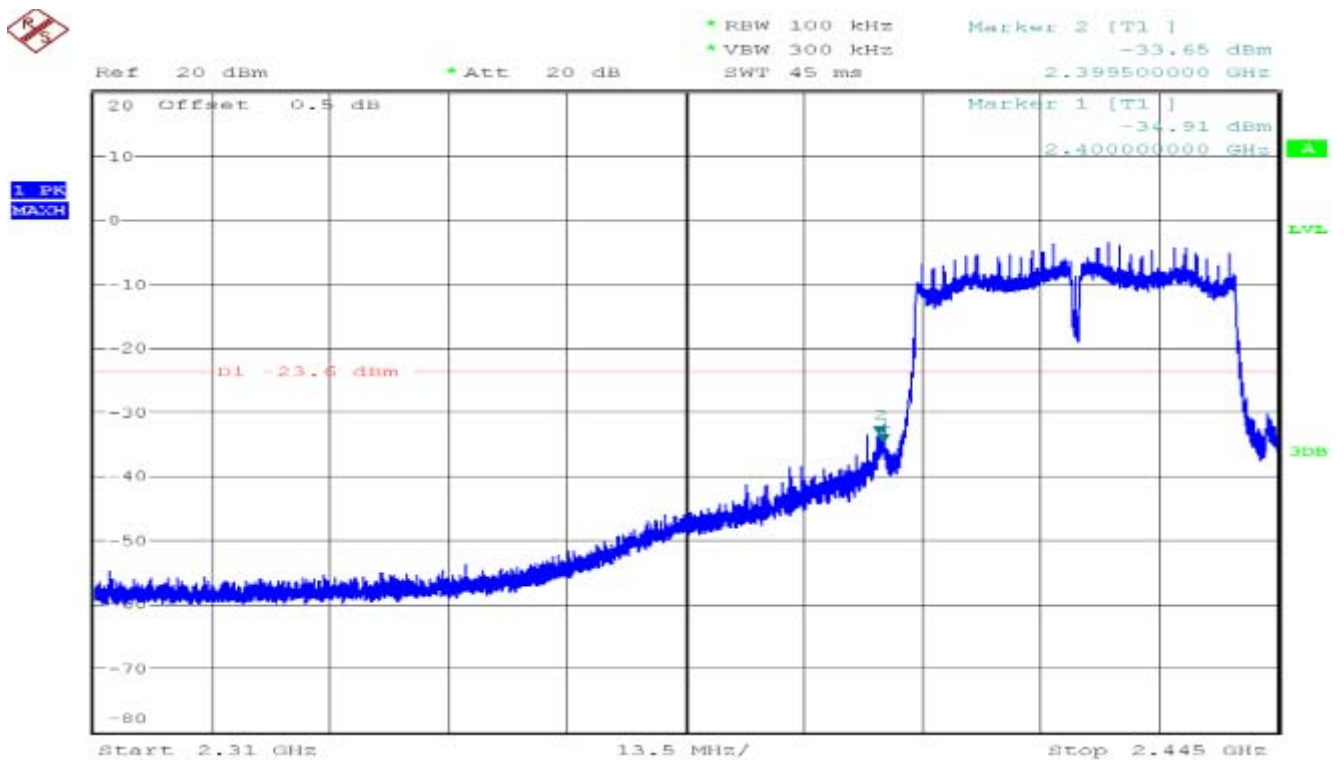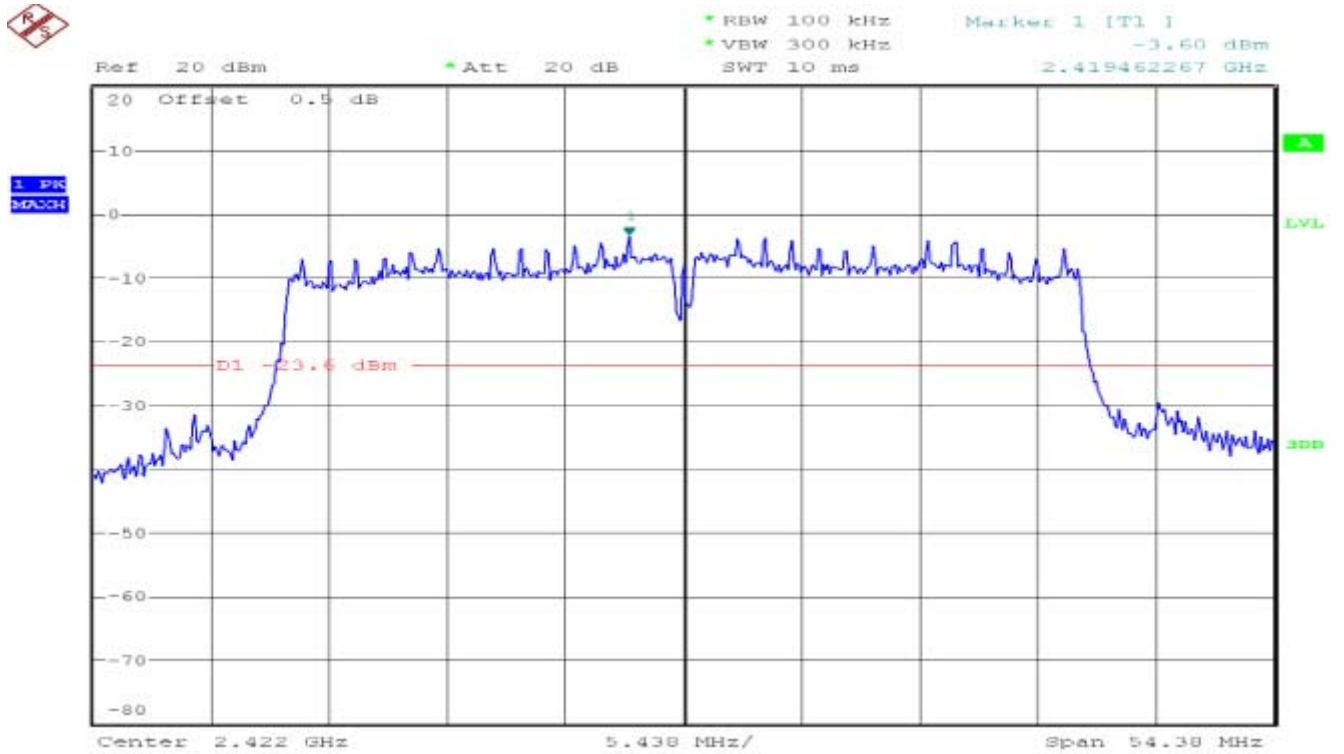

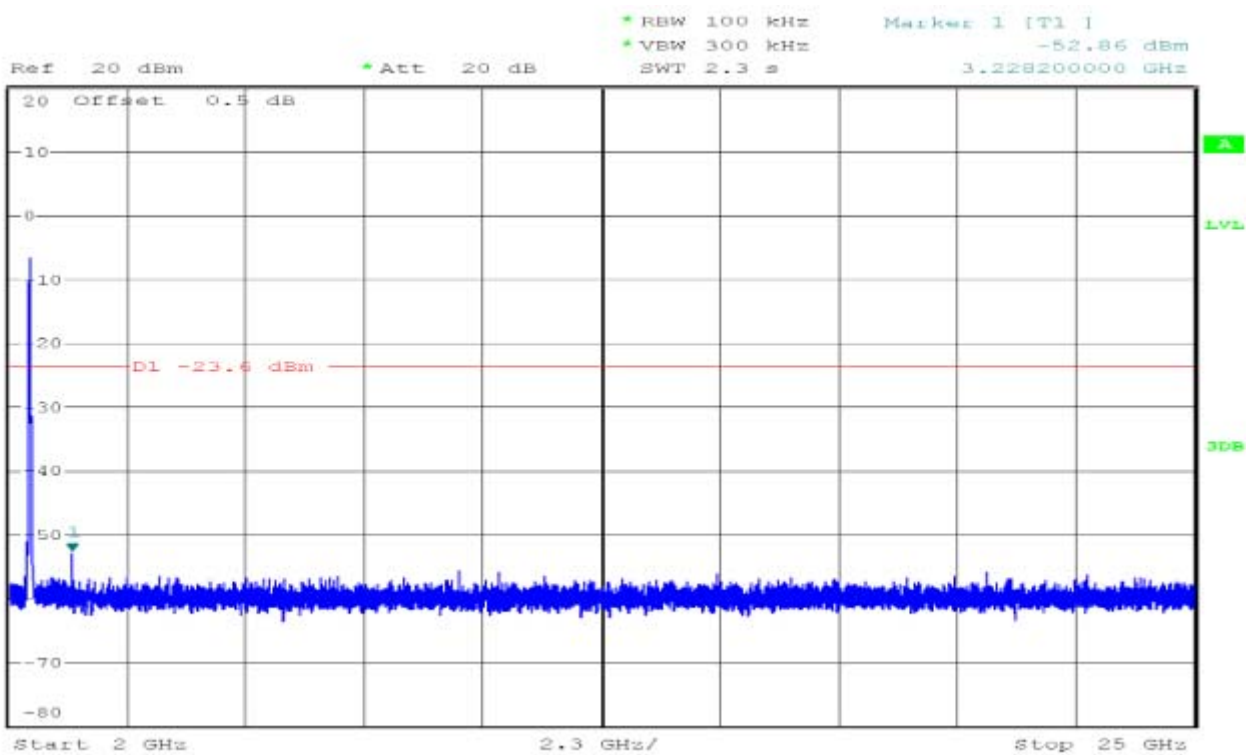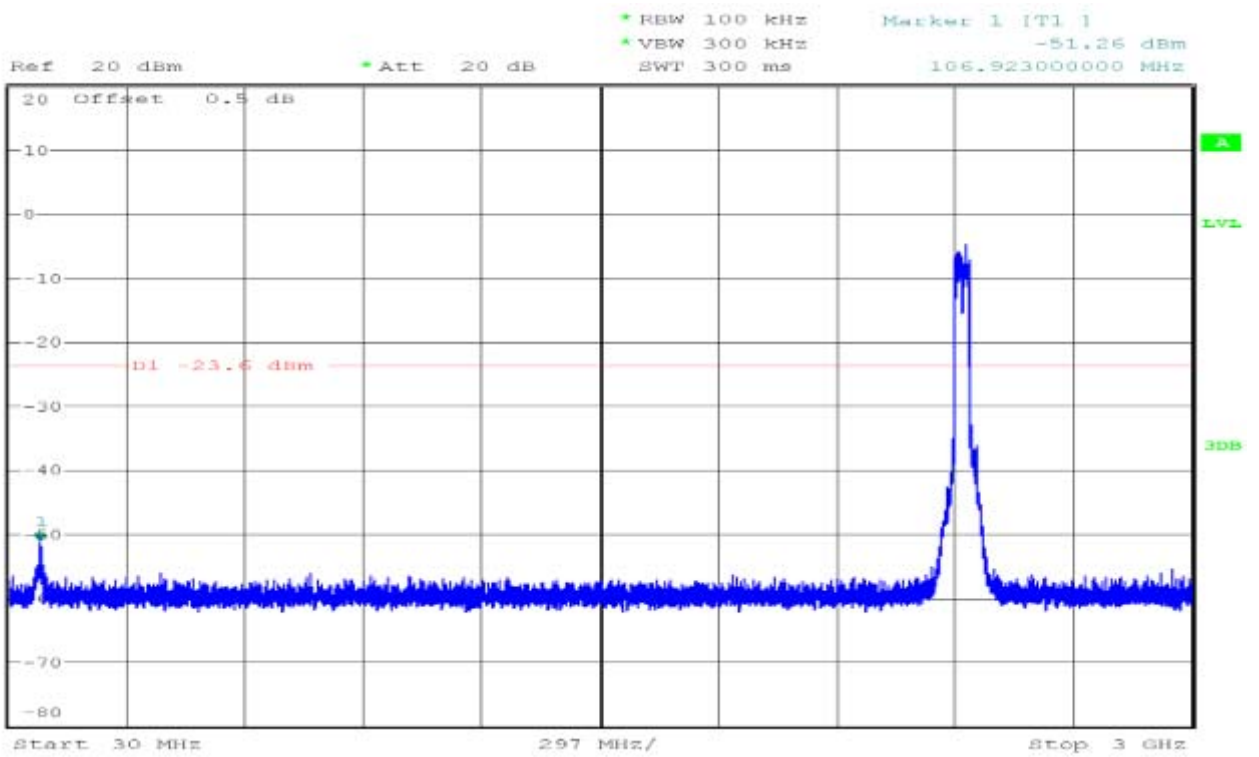




CH Mid

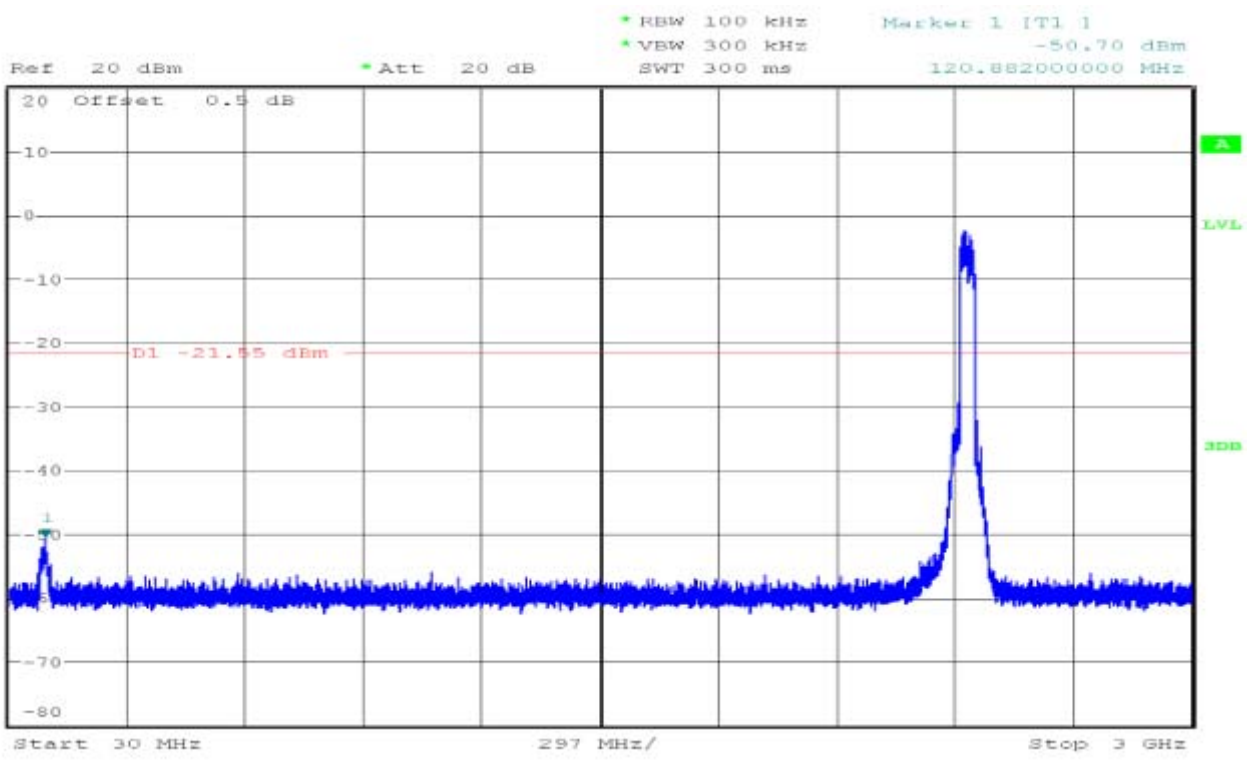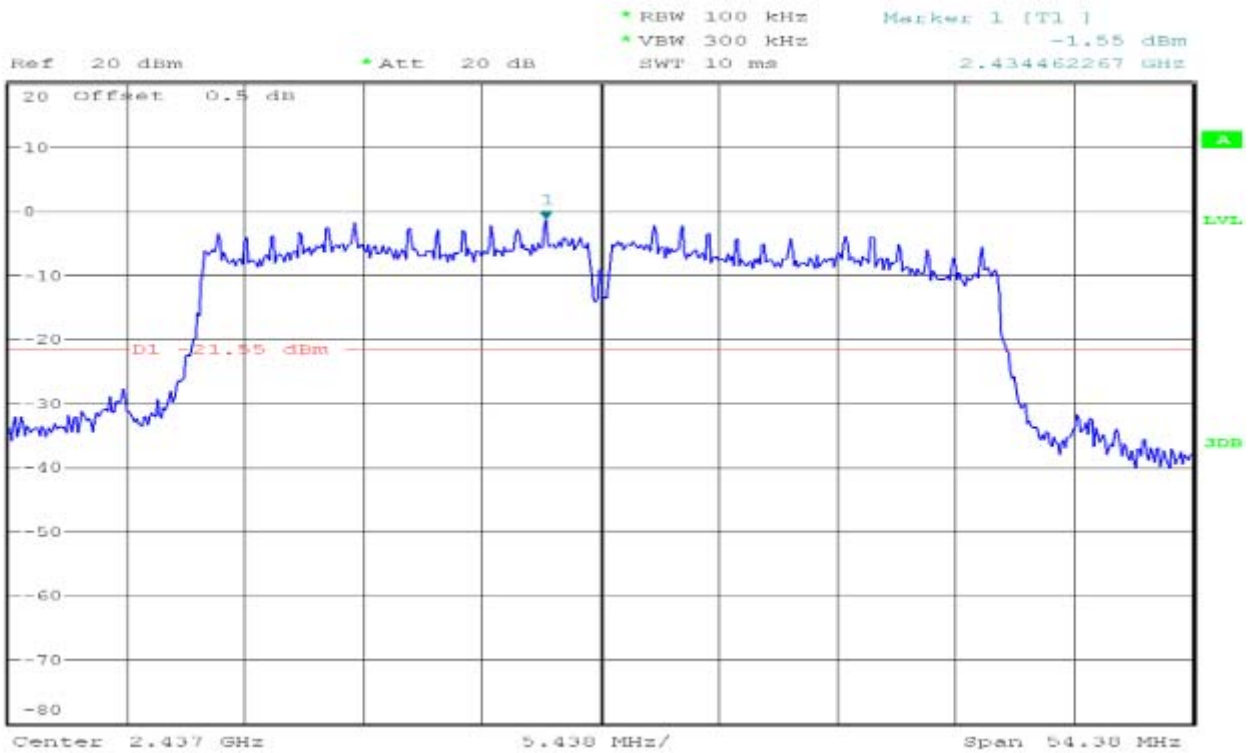


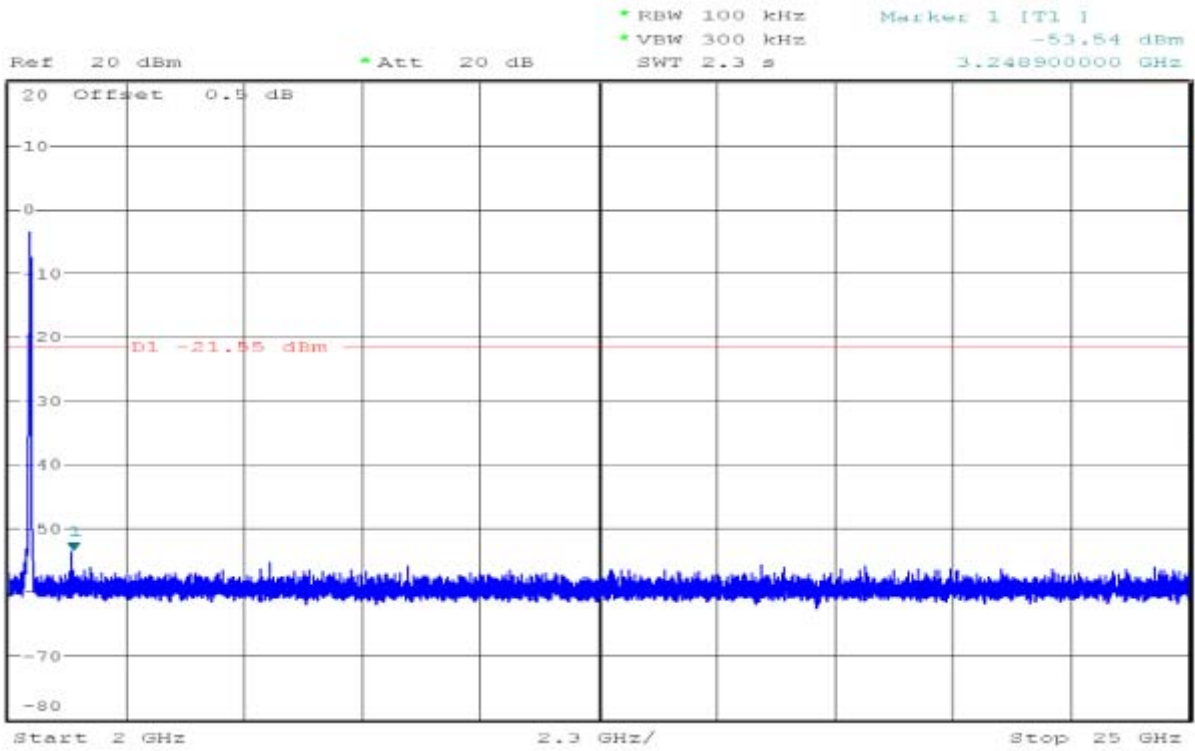

CH High

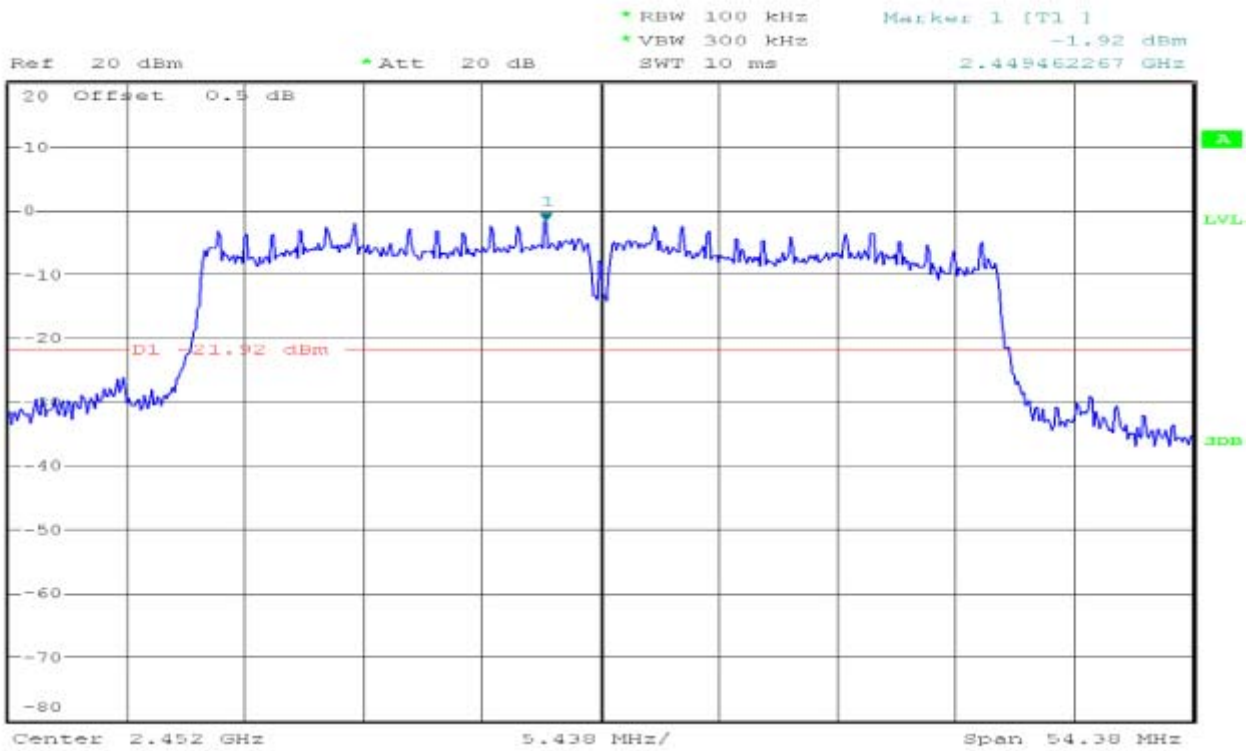


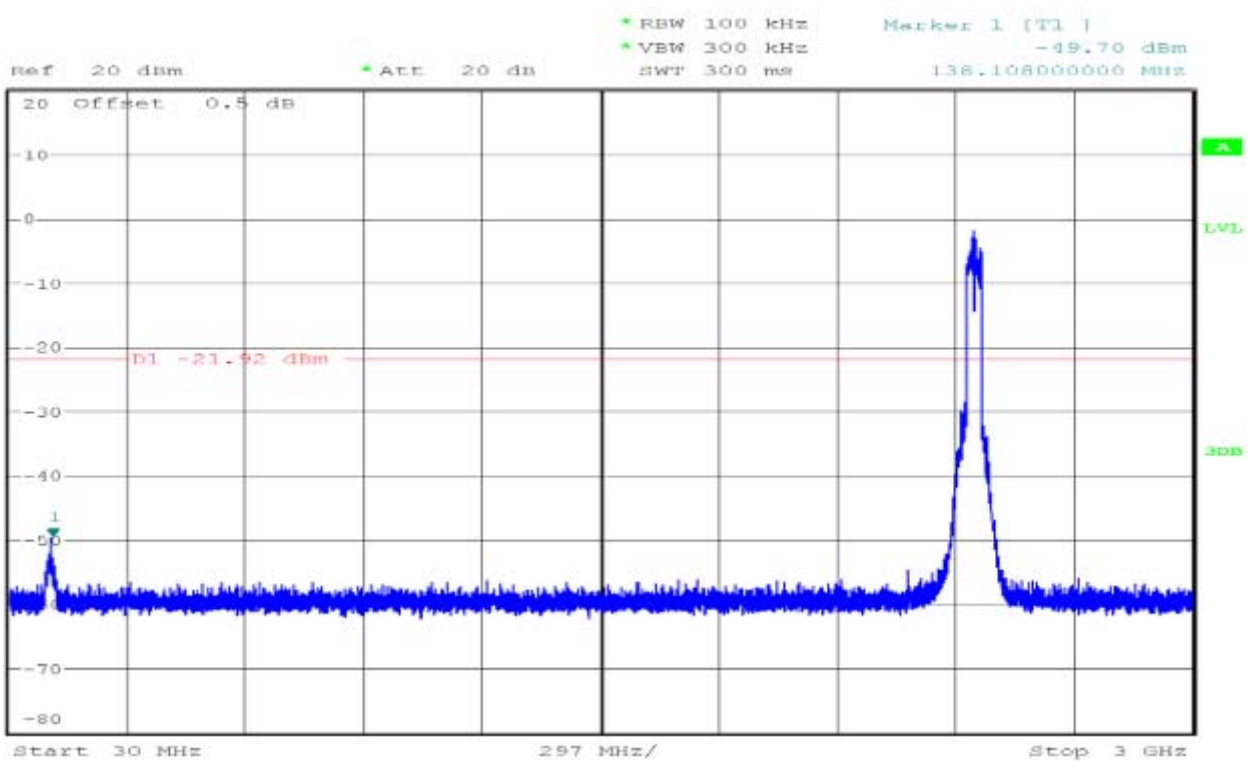
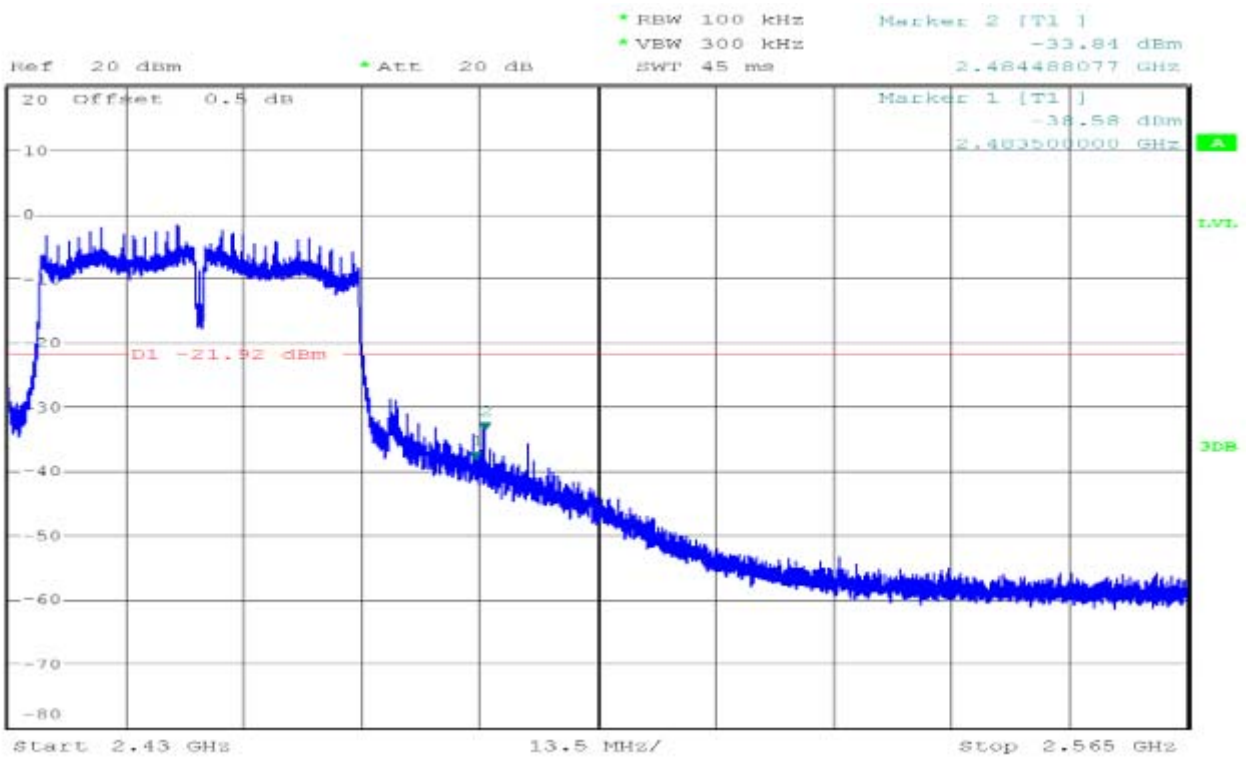


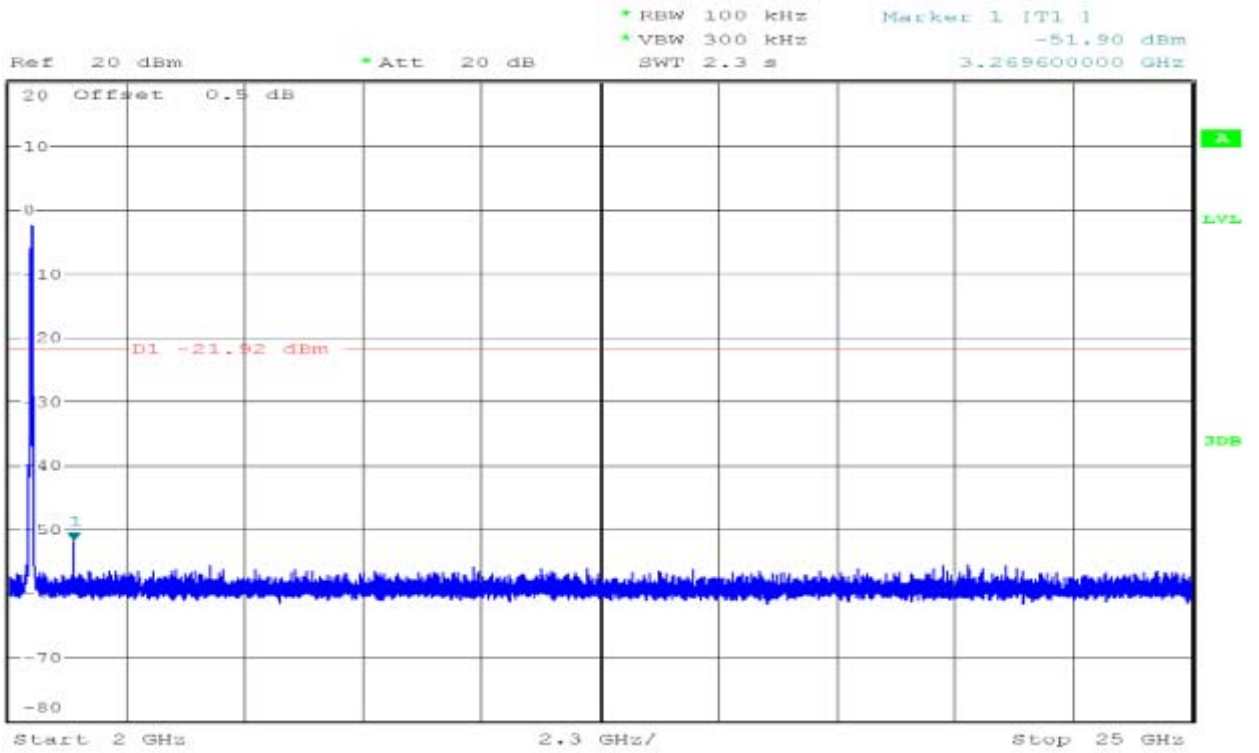


IEEE 802.11n HT40 mode/Chain 1


CH Low


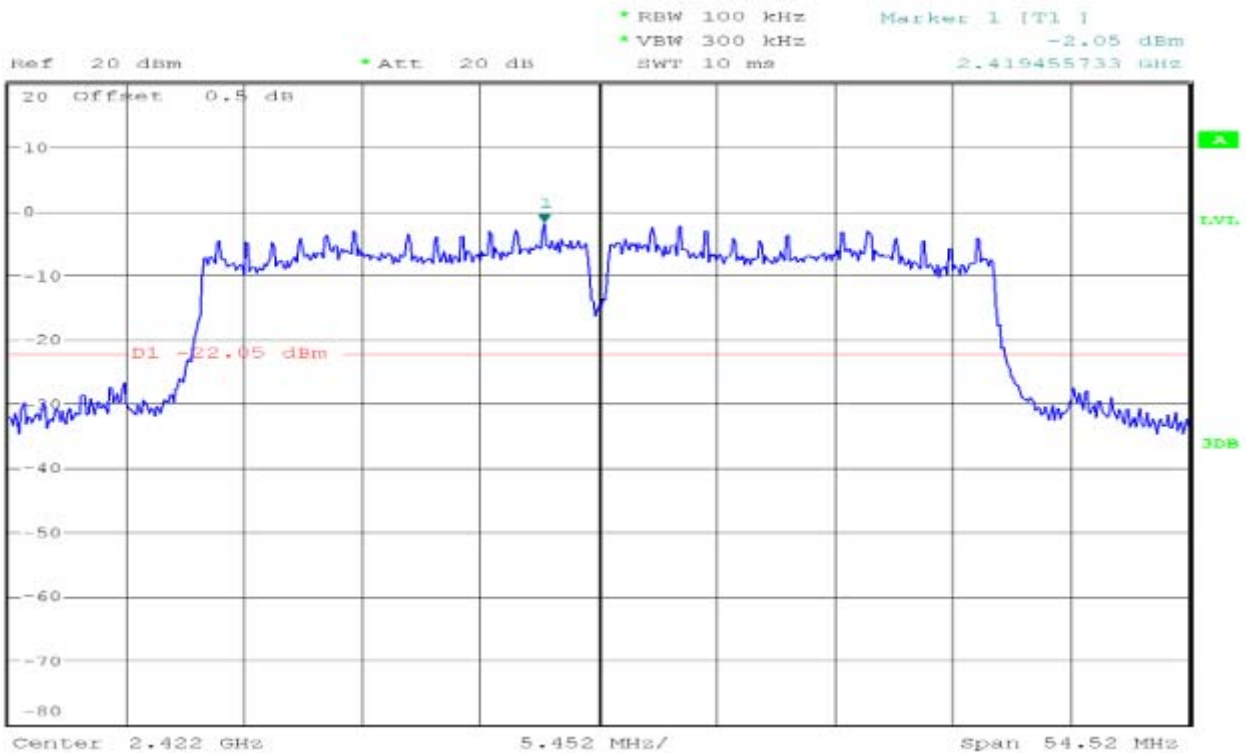


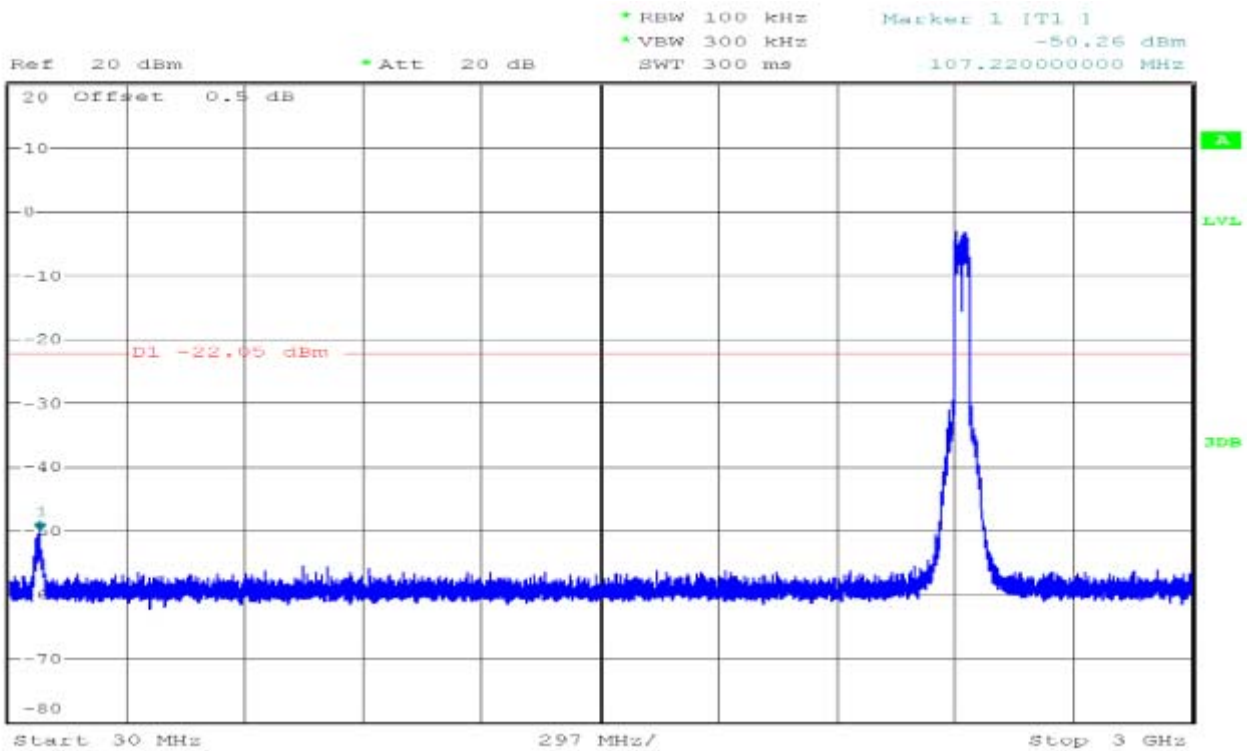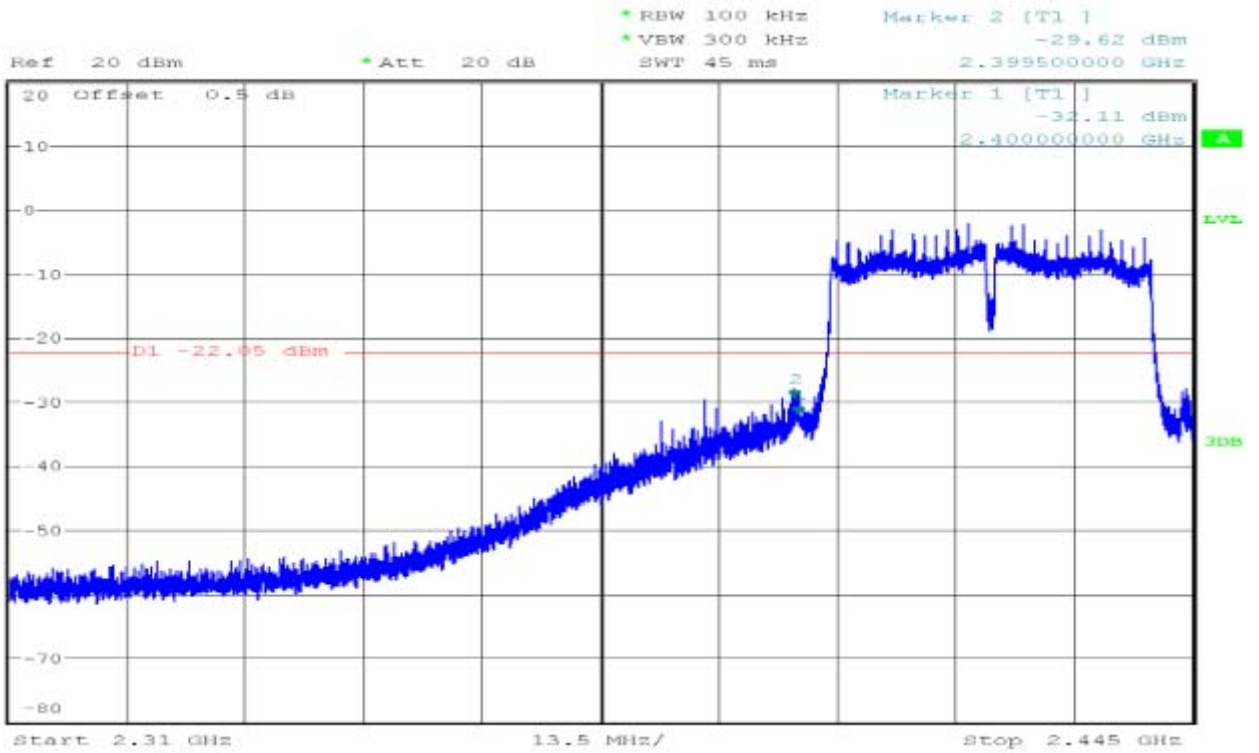


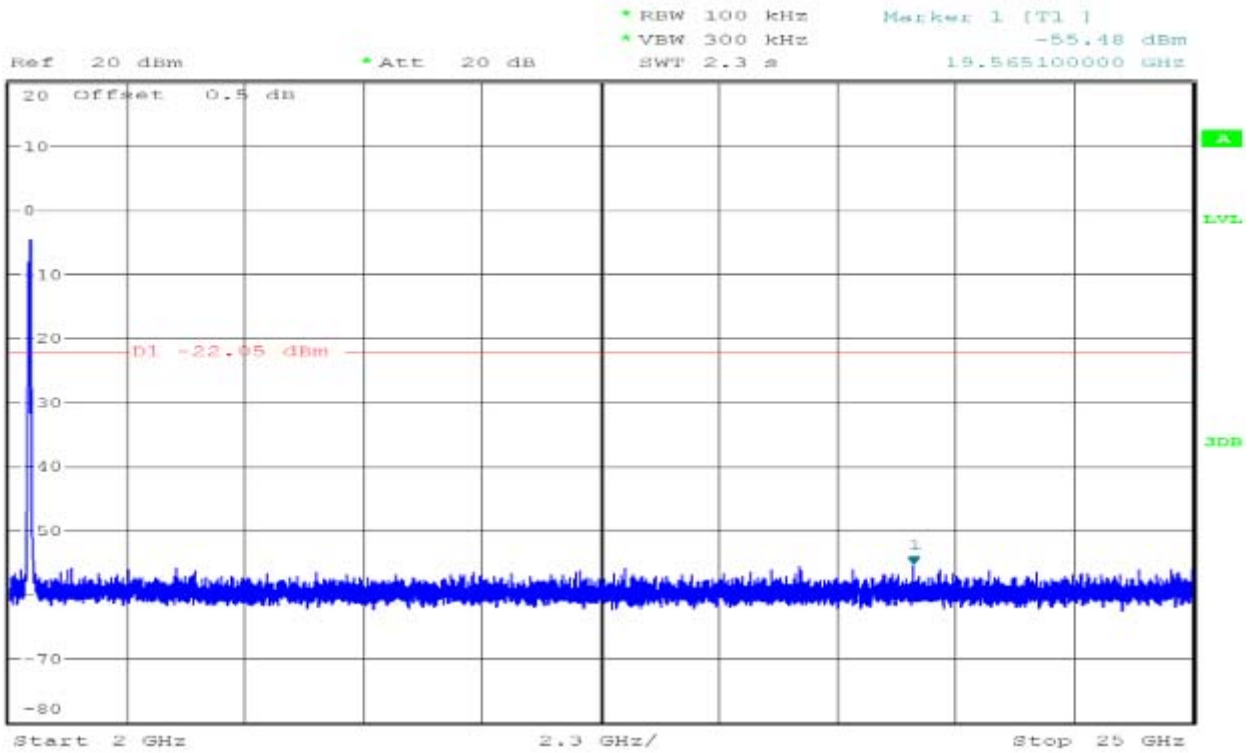




CH Mid

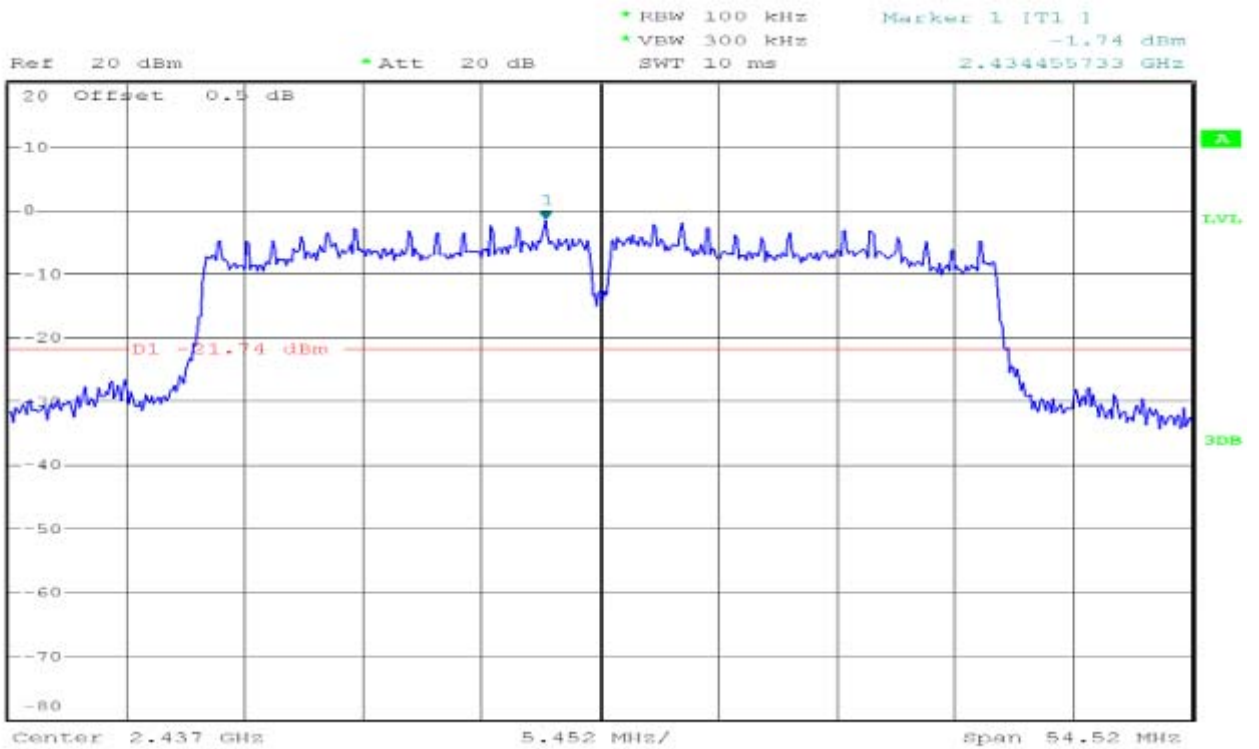

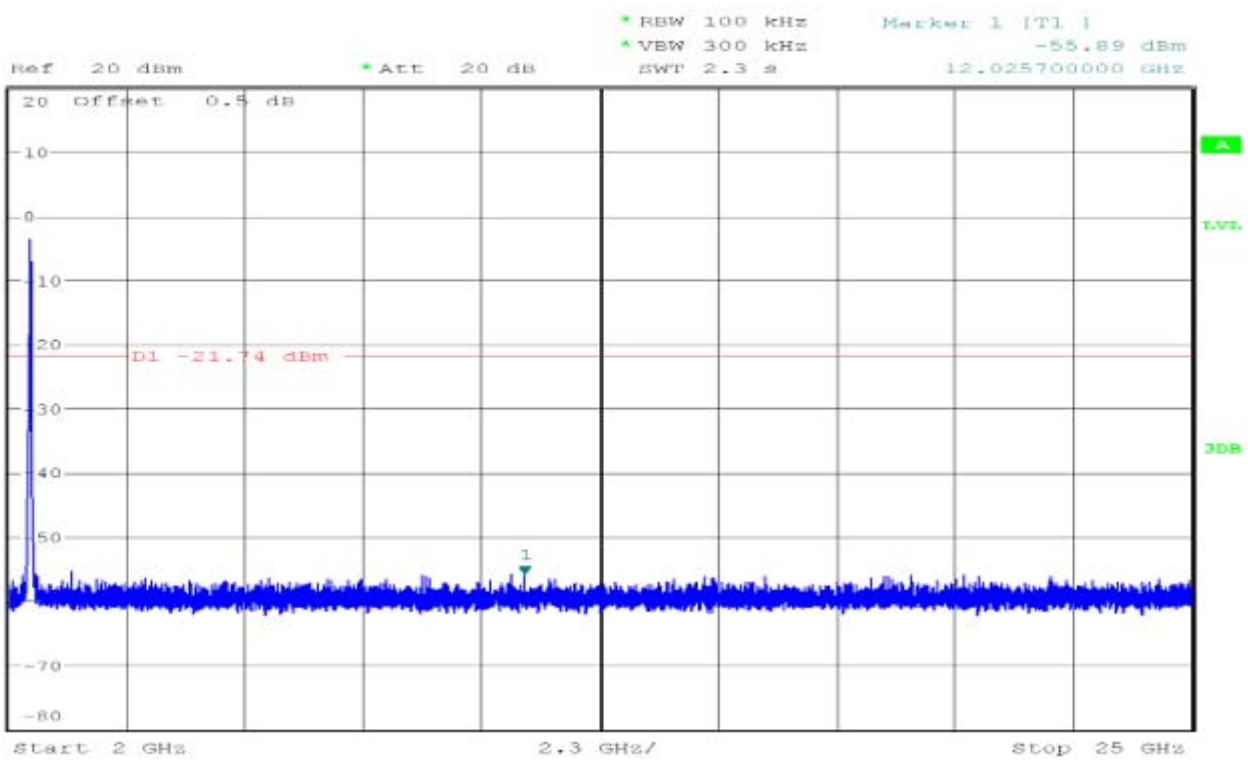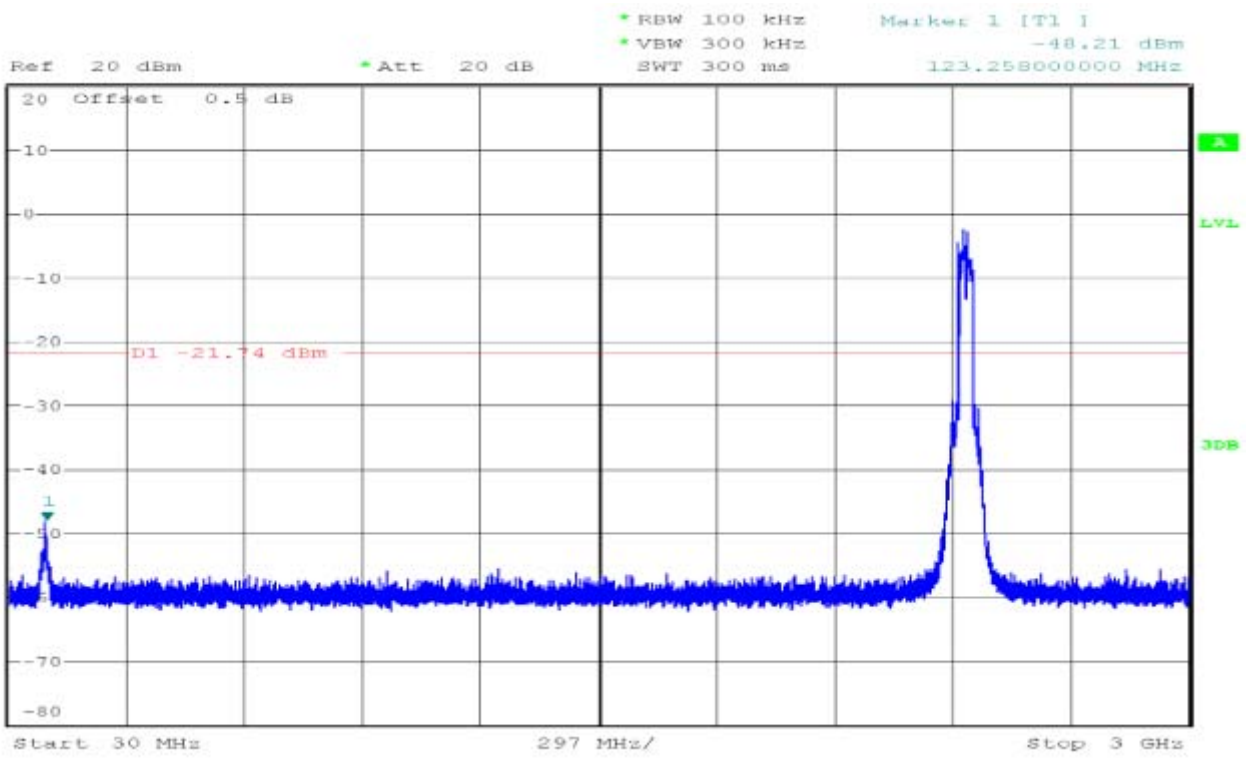

CH High

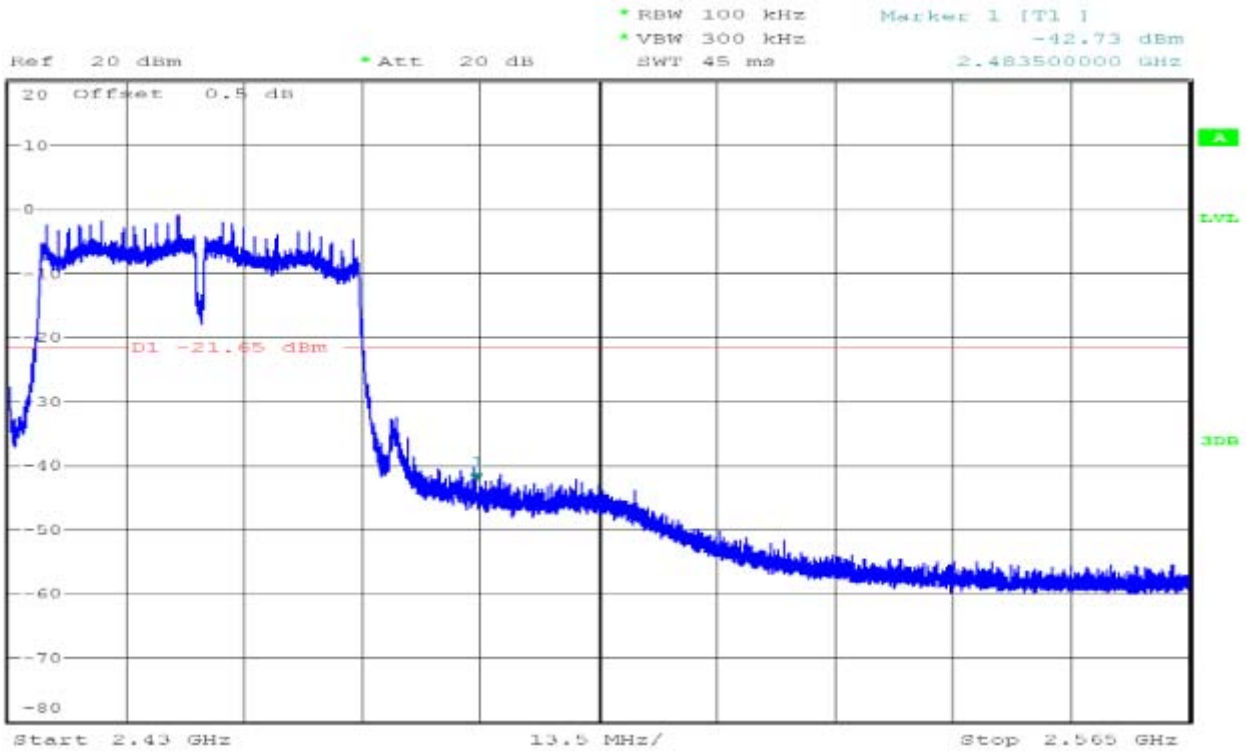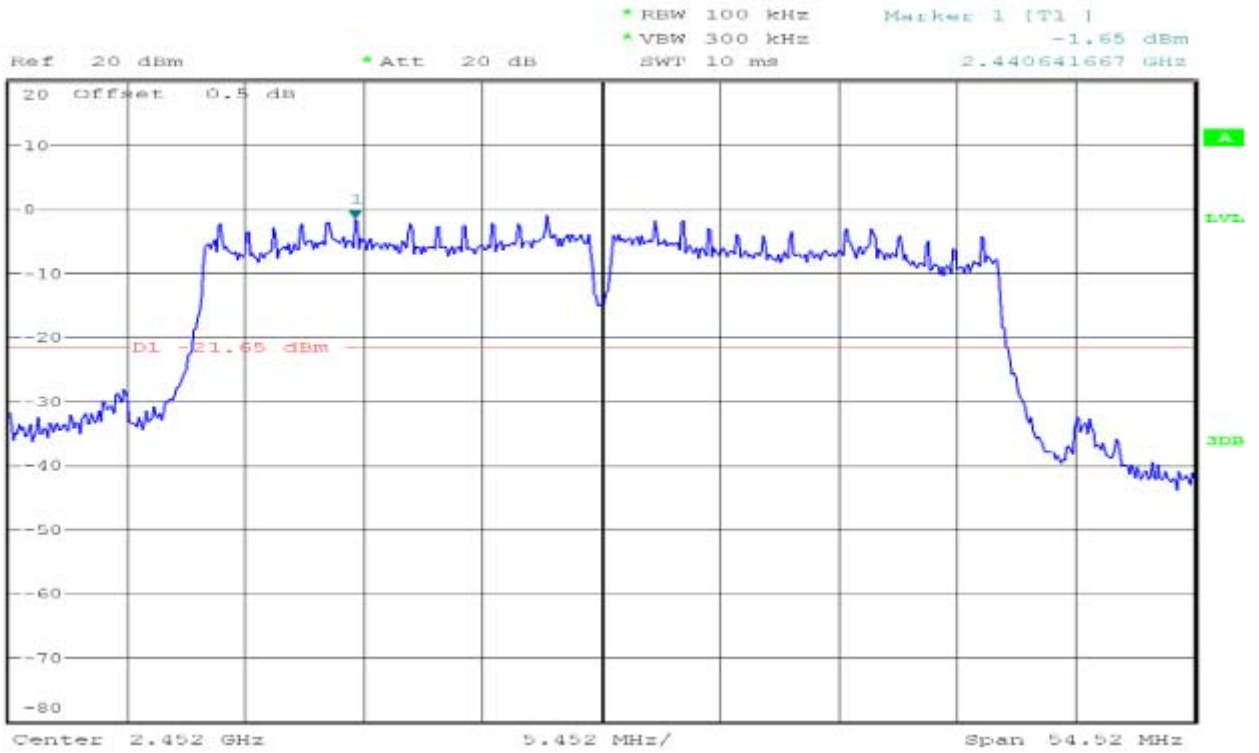

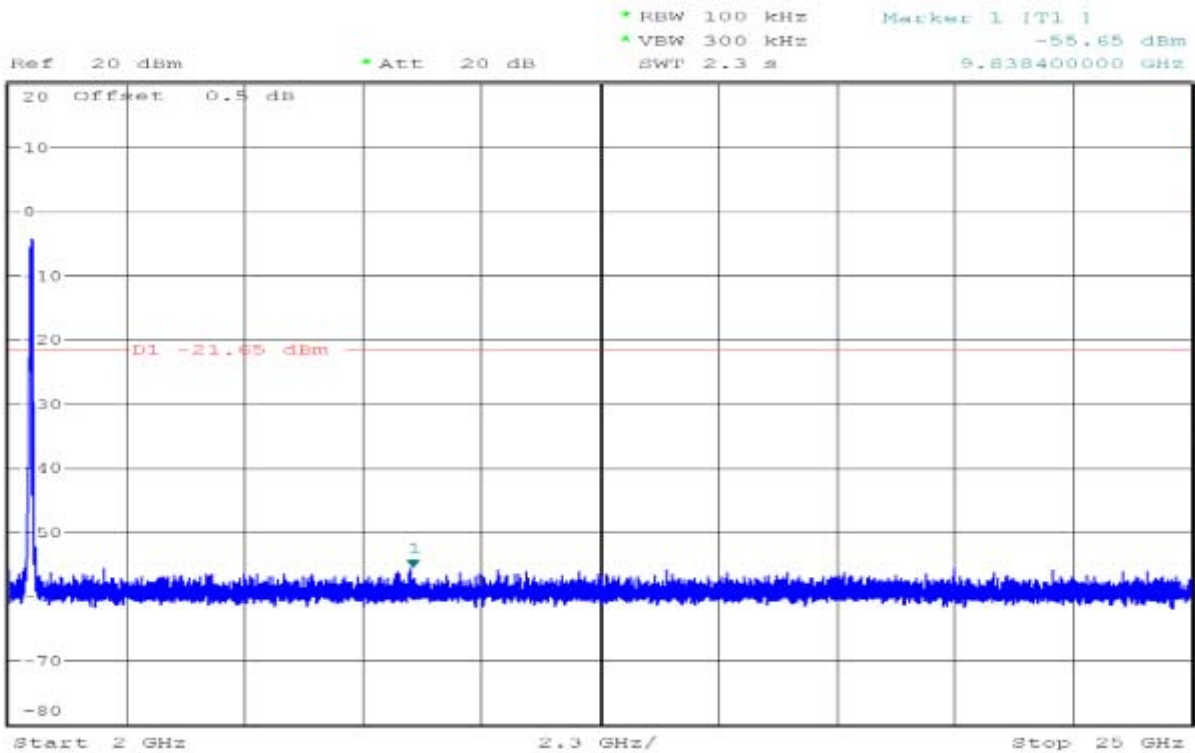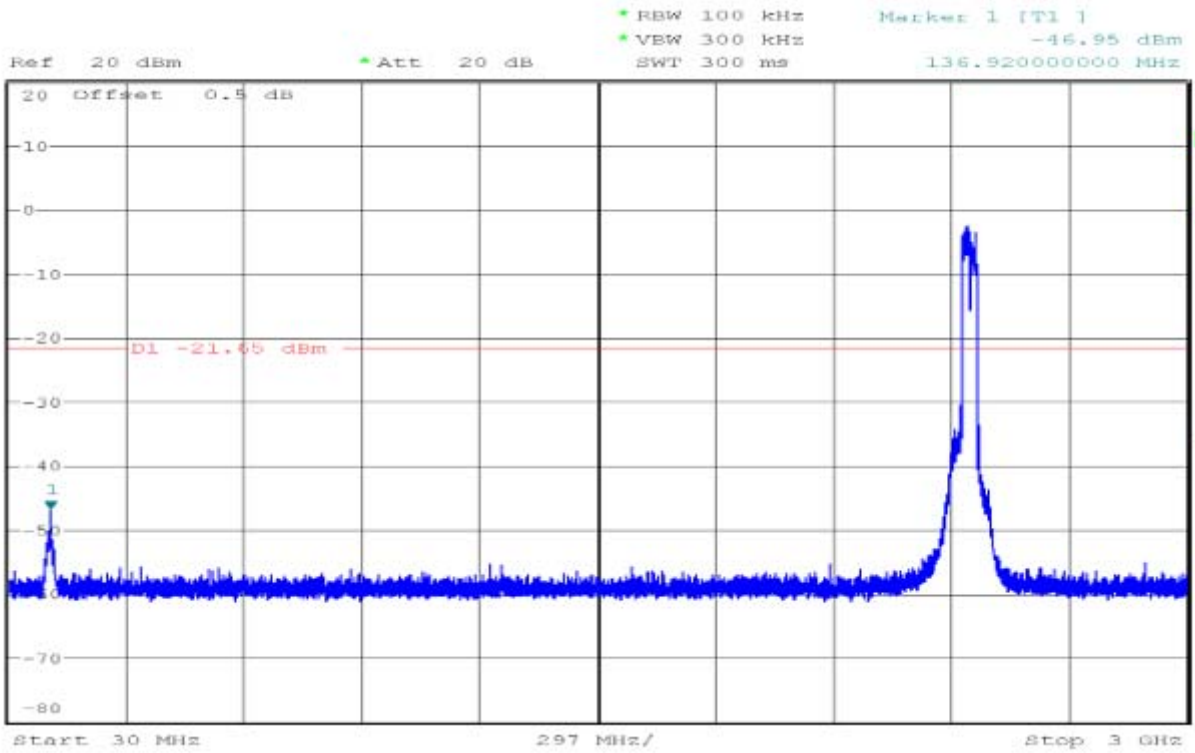

7.6. RADIATED EMISSIONS

LIMIT

Radiated emissions from 9 kHz to 25 GHz were measured according to the methods defines in ANSI C63.10-2013. The EUT was placed above the ground plane, 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz. The interface cables and equipment positions were varied within limits of reasonable applications to determine the positions producing maximum radiated emissions

1. According to §15.209(a), except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

| FREQUENCIES(MHz) | FIELD STRENGTH (microvolts/meter) | MEASUREMENT DISTANCE(meters) |
|------------------|--------------------------------------|---------------------------------|
| 0.009~0.490 | 2400/F(kHz) | 300 |
| 0.490~1.705 | 24000/F(kHz) | 30 |
| 1.705~30.0 | 30 | 30 |
| 30~88 | 100 | 3 |
| 88~216 | 150 | 3 |
| 216~960 | 200 | 3 |
| Above 960 | 500 | 3 |


Remark: Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

2.In the emission table above, the tighter limit applies at the band edges.


| Frequency (MHz) | Field Strength (μ V/m at 3-meter) | Field Strength (dB μ V/m at 3-meter) |
|--------------------|-------------------------------------------|---------------------------------------------|
| 30-88 | 100 | 40 |
| 88-216 | 150 | 43.5 |
| 216-960 | 200 | 46 |
| Above 960 | 500 | 54 |

Test Configuration


Below 30MHz

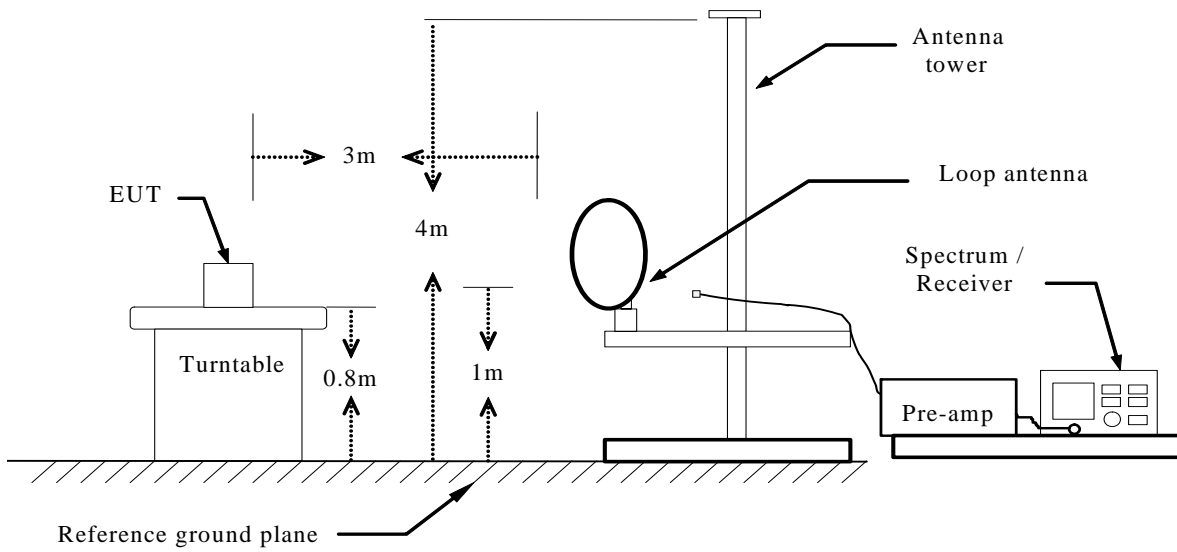

Below 1 GHz

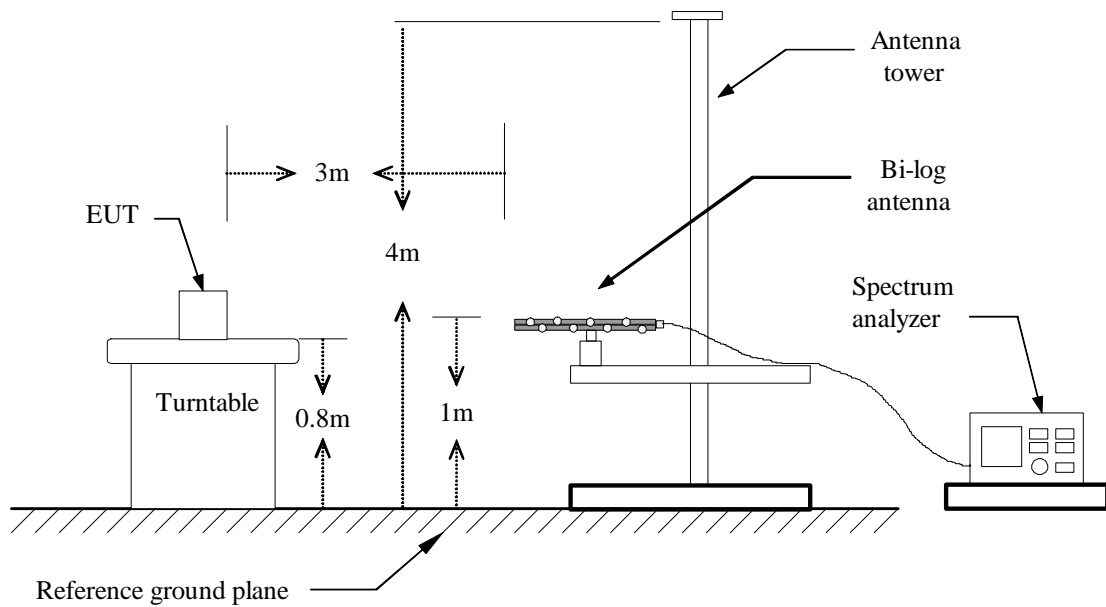

Above 1 GHz

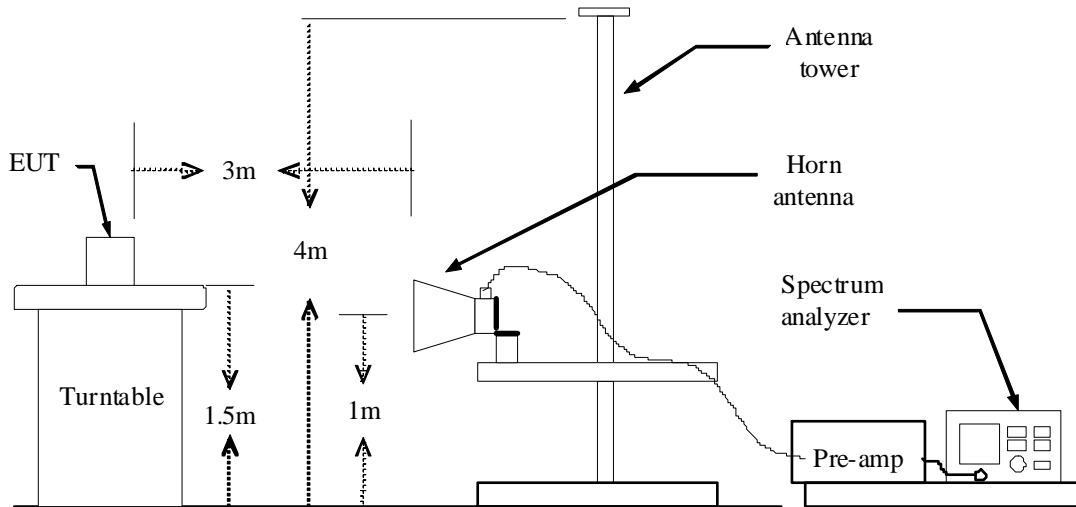

TEST PROCEDURE

1. The EUT is placed on a turntable above ground plane, which is 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Set the spectrum analyzer in the following setting as:

Below 1GHz:

RBW=100kHz / VBW=300kHz / Sweep=AUTO

Above 1GHz:

PEAK: RBW=VBW=1MHz / Sweep=AUTO

AVERAGE: RBW=1MHz / Sweep=AUTO

VBW=10Hz, when duty cycle is no less than 98 percent.


VBW $\geq 1/T$, when duty cycle is less than 98 percent, where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

| Band | Duty Cycle(%) | T(ms) | 1/T(kHz) | VBW Setting |
|-------------------|---------------|-------|----------|-------------|
| IEEE 802.11 b | 99 | -- | -- | 10Hz |
| IEEE 802.11 g | 98 | -- | -- | 10Hz |
| IEEE 802.11n HT20 | 94 | 1.4 | 0.7 | 1KHz |
| IEEE 802.11n HT40 | 94 | 1.4 | 0.7 | 1KHz |

7. Repeat above procedures until the measurements for all frequencies are complete.


TEST RESULTS

RESTRICTED BANDEDGE (b Mode, Low Channel, Horizontal)

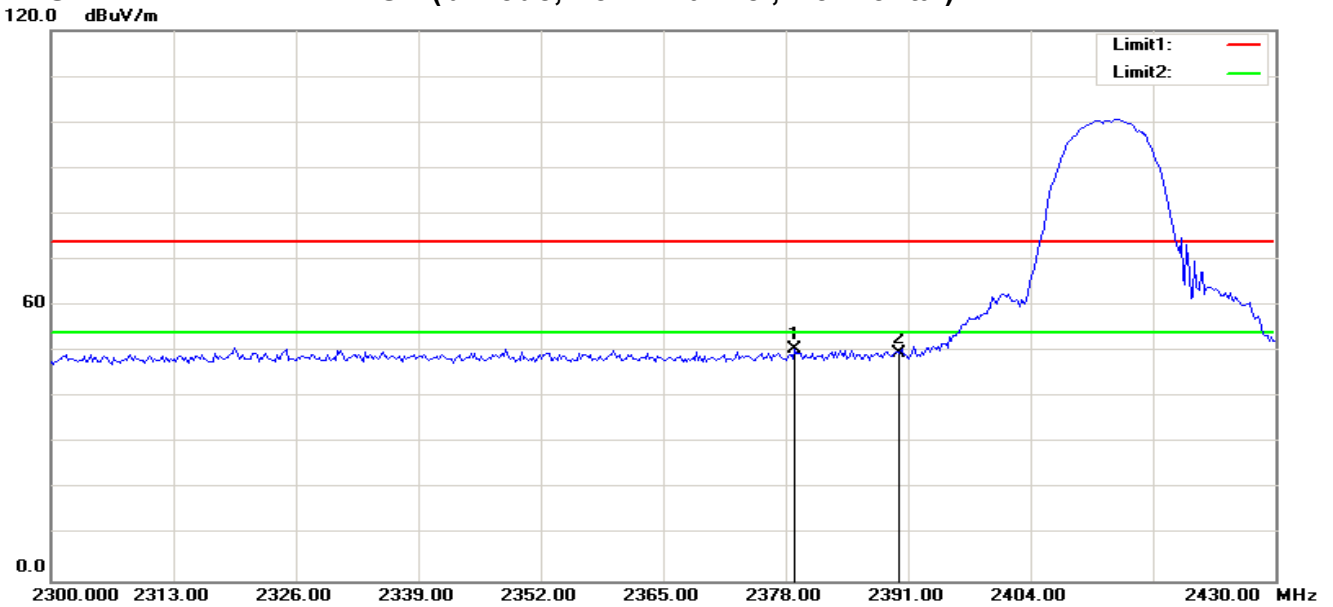


| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor(dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Height (cm) | Degree (deg.) | Remark |
|-----|-----------------|----------------|----------------------|-----------------|----------------|-------------|-------------|---------------|--------|
| 1 | 2378.958 | 57.91 | -7.41 | 50.50 | 74.00 | -23.50 | 200 | 314 | peak |
| 2 | 2390.000 | 57.11 | -7.31 | 49.80 | 74.00 | -24.20 | 200 | 115 | peak |

RESTRICTED BANDEDGE (b Mode, Low Channel, Vertical)

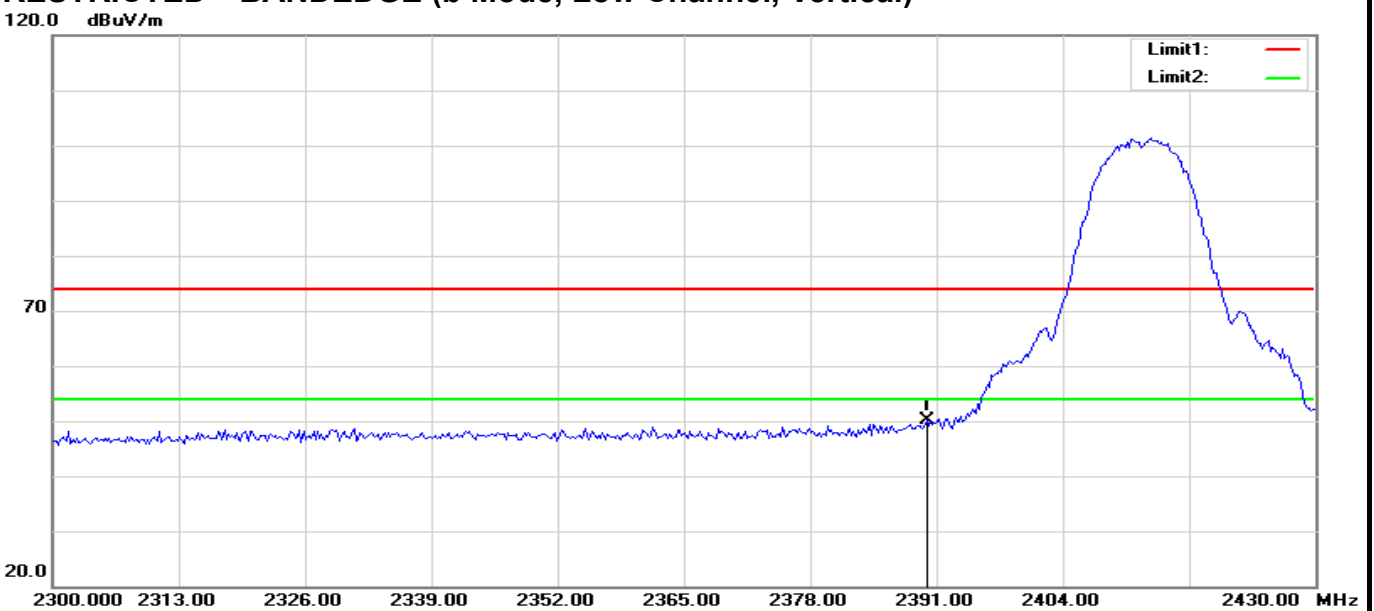


| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor(dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Height (cm) | Degree (deg.) | Remark |
|-----|-----------------|----------------|----------------------|-----------------|----------------|-------------|-------------|---------------|--------|
| 1 | 2390.000 | 57.37 | -7.31 | 50.06 | 74.00 | -23.94 | 100 | 206 | peak |

RESTRICTED BANDEDGE (b Mode, High Channel, Horizontal)

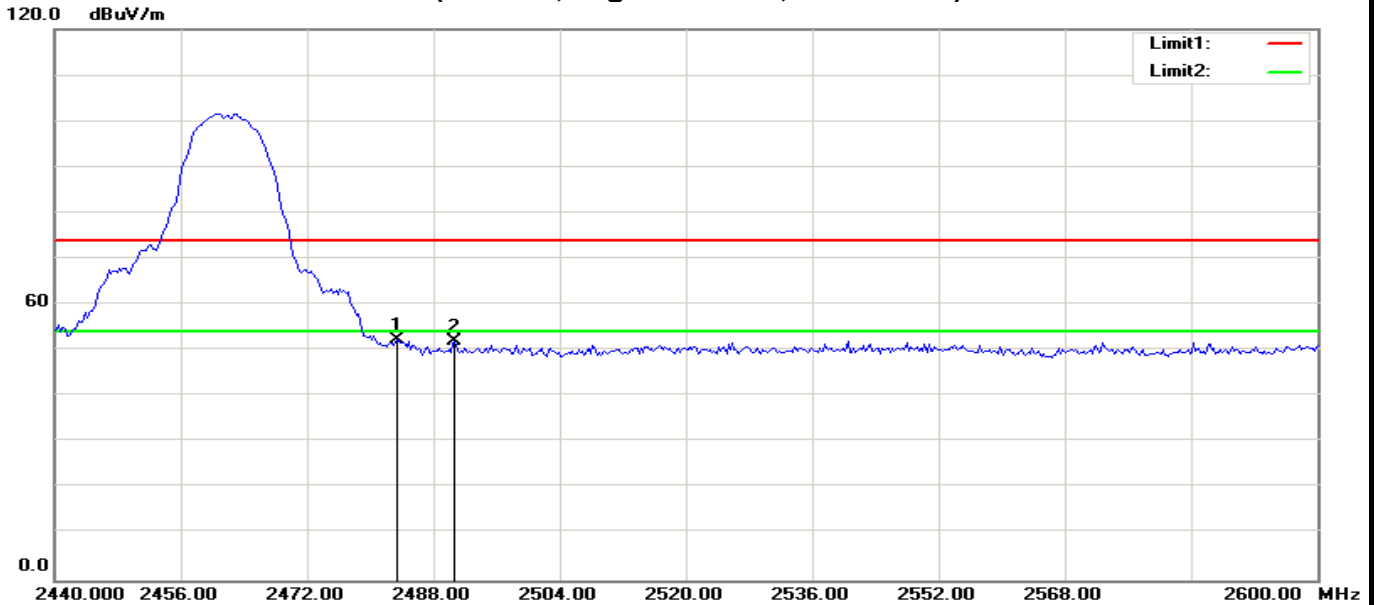


| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor(dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Height (cm) | Degree (deg.) | Remark |
|-----|-----------------|----------------|----------------------|-----------------|----------------|-------------|-------------|---------------|--------|
| 1 | 2483.500 | 58.89 | -6.44 | 52.45 | 74.00 | -21.55 | 100 | 293 | peak |
| 2 | 2490.769 | 58.38 | -6.38 | 52.00 | 74.00 | -22.00 | 100 | 327 | peak |

RESTRICTED BANDEDGE (b Mode, High Channel, Vertical)

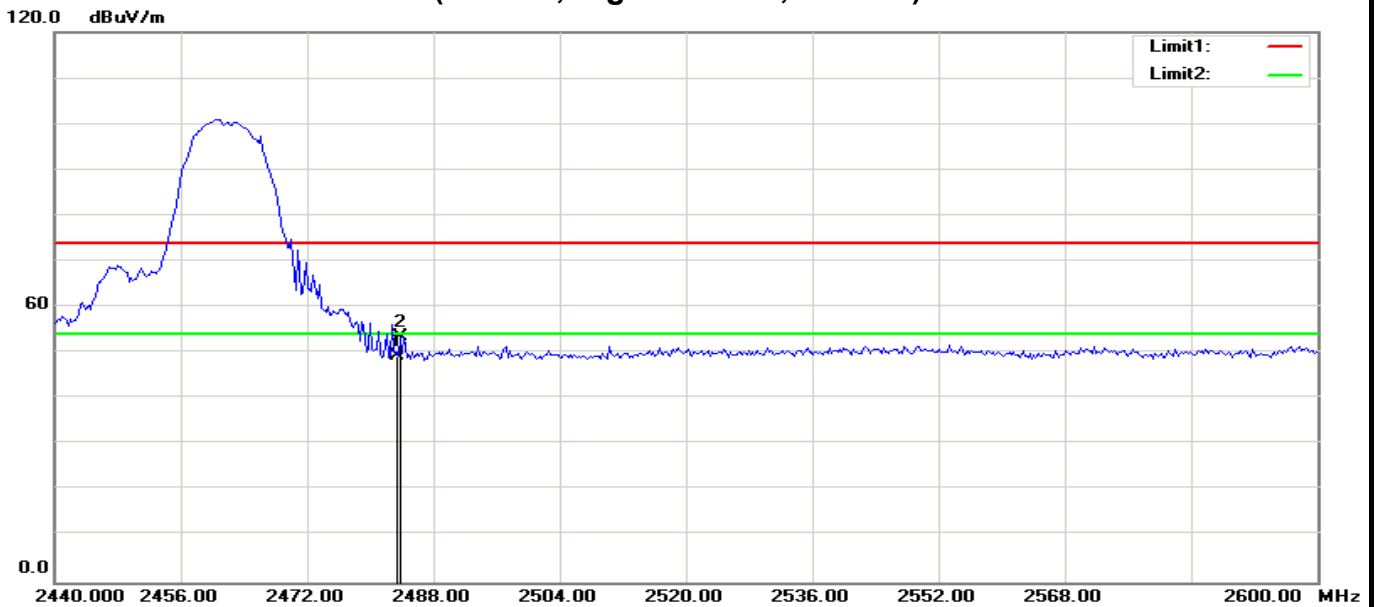


| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor(dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Height (cm) | Degree (deg.) | Remark |
|-----|-----------------|----------------|----------------------|-----------------|----------------|-------------|-------------|---------------|--------|
| 1 | 2483.500 | 55.74 | -6.44 | 49.30 | 74.00 | -24.70 | 100 | 299 | peak |
| 2 | 2483.846 | 60.00 | -6.44 | 53.56 | 74.00 | -20.44 | 100 | 272 | peak |

RESTRICTED BANDEDGE (g Mode, Low Channel, Horizontal)

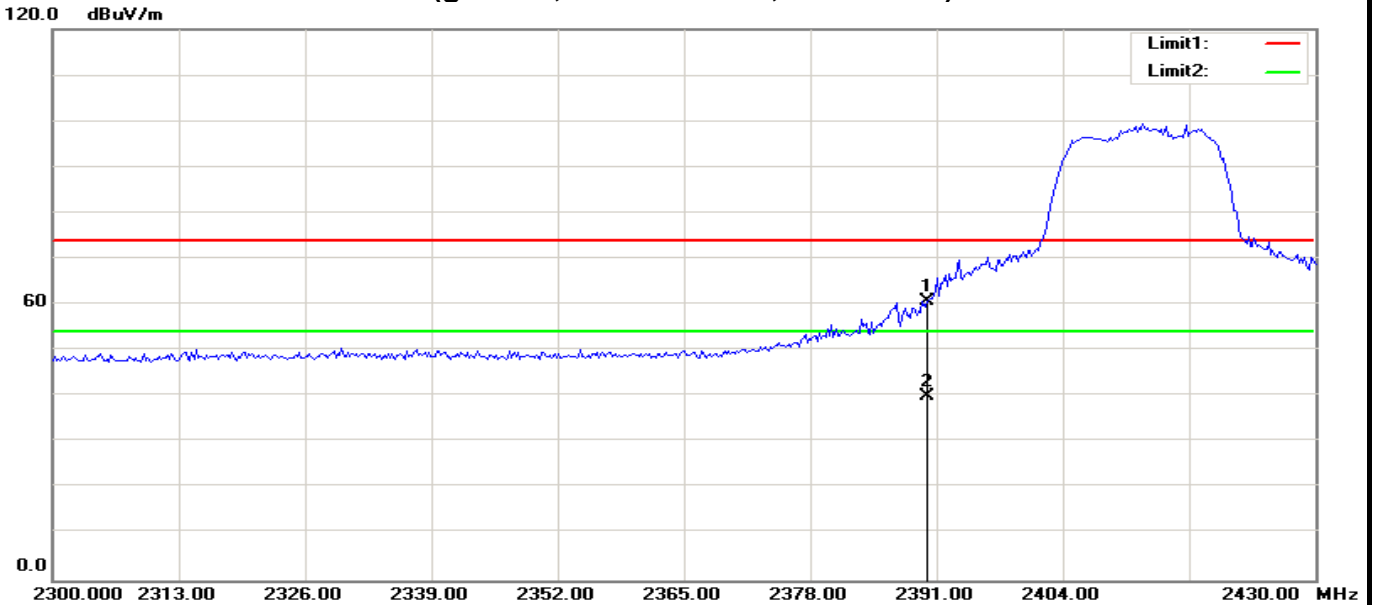


| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor(dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Height (cm) | Degree (deg.) | Remark |
|-----|-----------------|----------------|----------------------|-----------------|----------------|-------------|-------------|---------------|--------|
| 1 | 2390.000 | 68.19 | -7.31 | 60.88 | 74.00 | -13.12 | 200 | 100 | peak |
| 2 | 2390.000 | 47.33 | -7.31 | 40.02 | 54.00 | -13.98 | 200 | 230 | AVG |

RESTRICTED BANDEDGE (g Mode, Low Channel, Vertical)

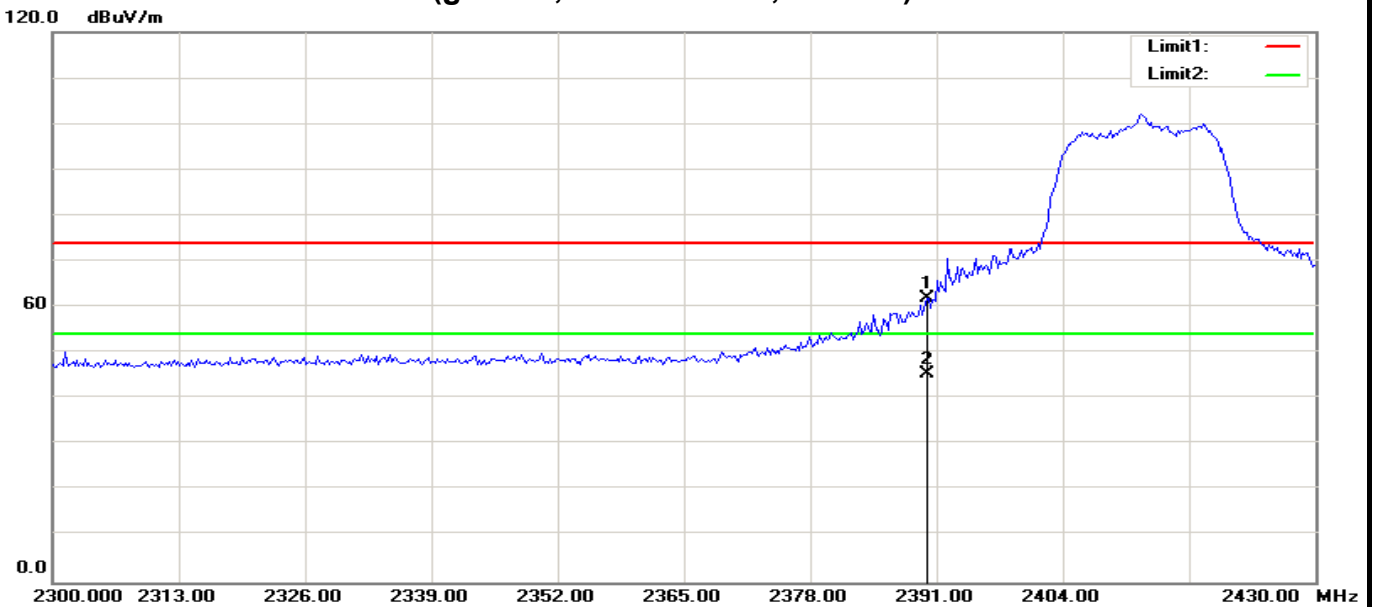


| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor(dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Height (cm) | Degree (deg.) | Remark |
|-----|-----------------|----------------|----------------------|-----------------|----------------|-------------|-------------|---------------|--------|
| 1 | 2390.000 | 69.26 | -7.31 | 61.95 | 74.00 | -12.05 | 200 | 313 | peak |
| 2 | 2390.000 | 52.82 | -7.31 | 45.51 | 54.00 | -8.49 | 200 | 300 | AVG |

RESTRICTED BANDEDGE (g Mode, High Channel, Horizontal)

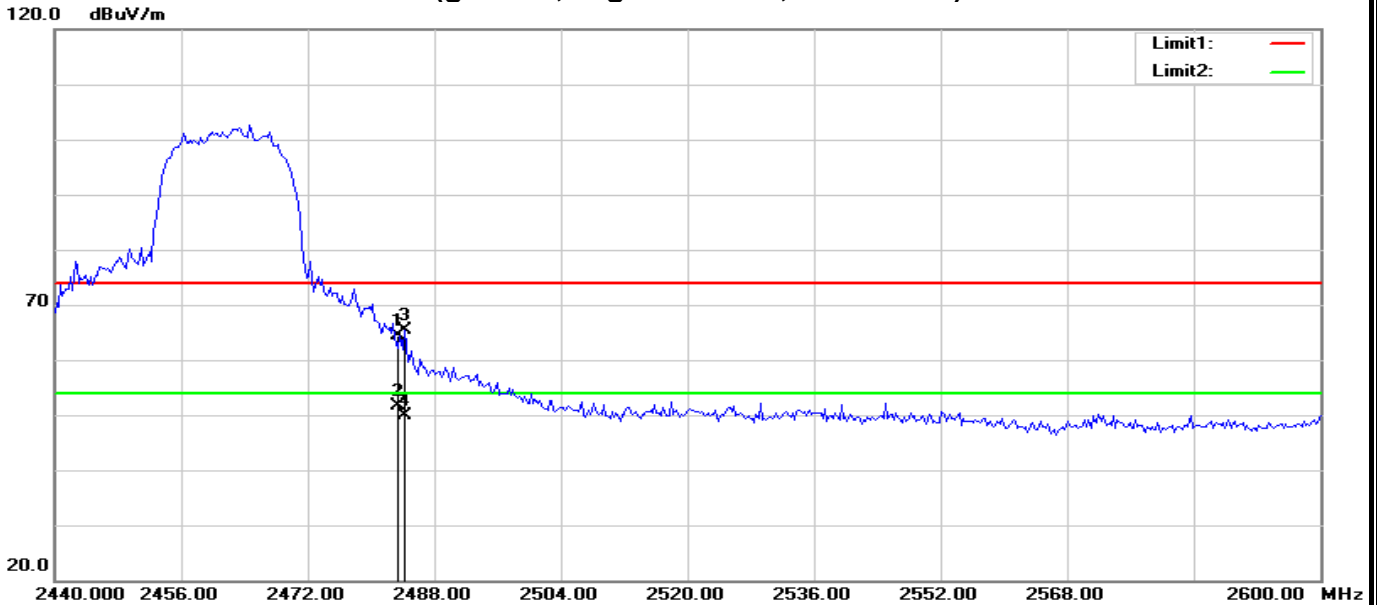


| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor(dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Height (cm) | Degree (deg.) | Remark |
|-----|-----------------|----------------|----------------------|-----------------|----------------|-------------|-------------|---------------|--------|
| 1 | 2483.500 | 70.82 | -6.44 | 64.38 | 74.00 | -9.62 | 200 | 317 | peak |
| 2 | 2483.500 | 57.97 | -6.44 | 51.53 | 54.00 | -2.47 | 200 | 302 | AVG |
| 3 | 2484.359 | 71.72 | -6.43 | 65.29 | 74.00 | -8.71 | 100 | 280 | peak |
| 4 | 2484.359 | 56.37 | -6.43 | 49.94 | 54.00 | -4.06 | 100 | 250 | AVG |

RESTRICTED BANDEDGE (g Mode, High Channel, Vertical)

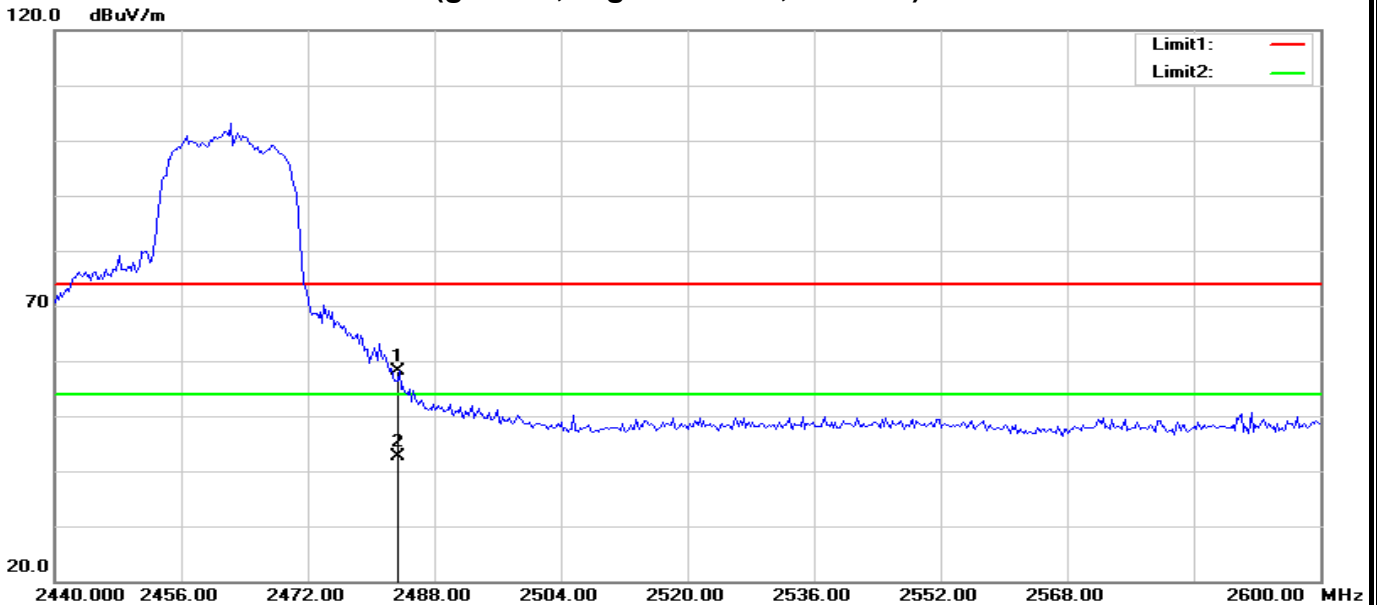


| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor(dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Height (cm) | Degree (deg.) | Remark |
|-----|-----------------|----------------|----------------------|-----------------|----------------|-------------|-------------|---------------|--------|
| 1 | 2483.500 | 64.58 | -6.44 | 58.14 | 74.00 | -15.86 | 200 | 126 | peak |
| 2 | 2483.500 | 48.98 | -6.44 | 42.54 | 54.00 | -11.46 | 200 | 341 | AVG |

RESTRICTED BANDEDGE (IEEE 802.11n HT20 mode, Low Channel, Horizontal)

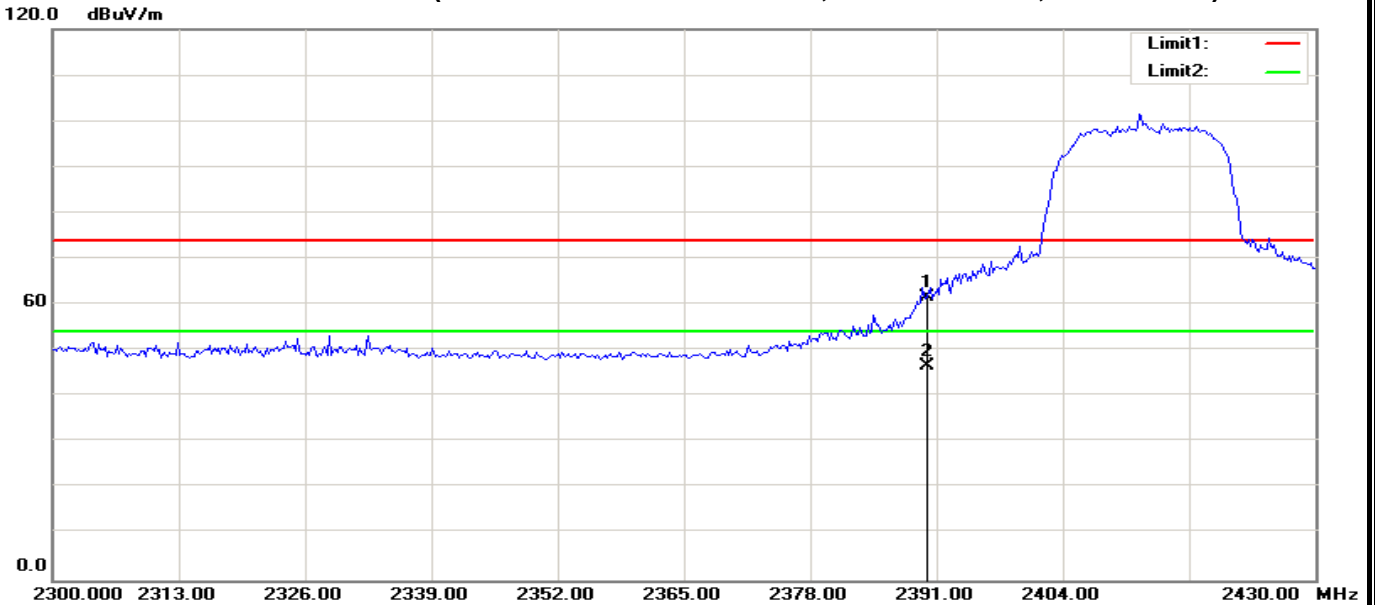


| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor(dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Height (cm) | Degree (deg.) | Remark |
|-----|-----------------|----------------|----------------------|-----------------|----------------|-------------|-------------|---------------|--------|
| 1 | 2390.000 | 69.11 | -7.31 | 61.80 | 74.00 | -12.20 | 200 | 150 | peak |
| 2 | 2390.000 | 53.85 | -7.31 | 46.54 | 54.00 | -7.46 | 200 | 280 | AVG |

RESTRICTED BANDEDGE (IEEE 802.11n HT20 mode, Low Channel, Vertical)

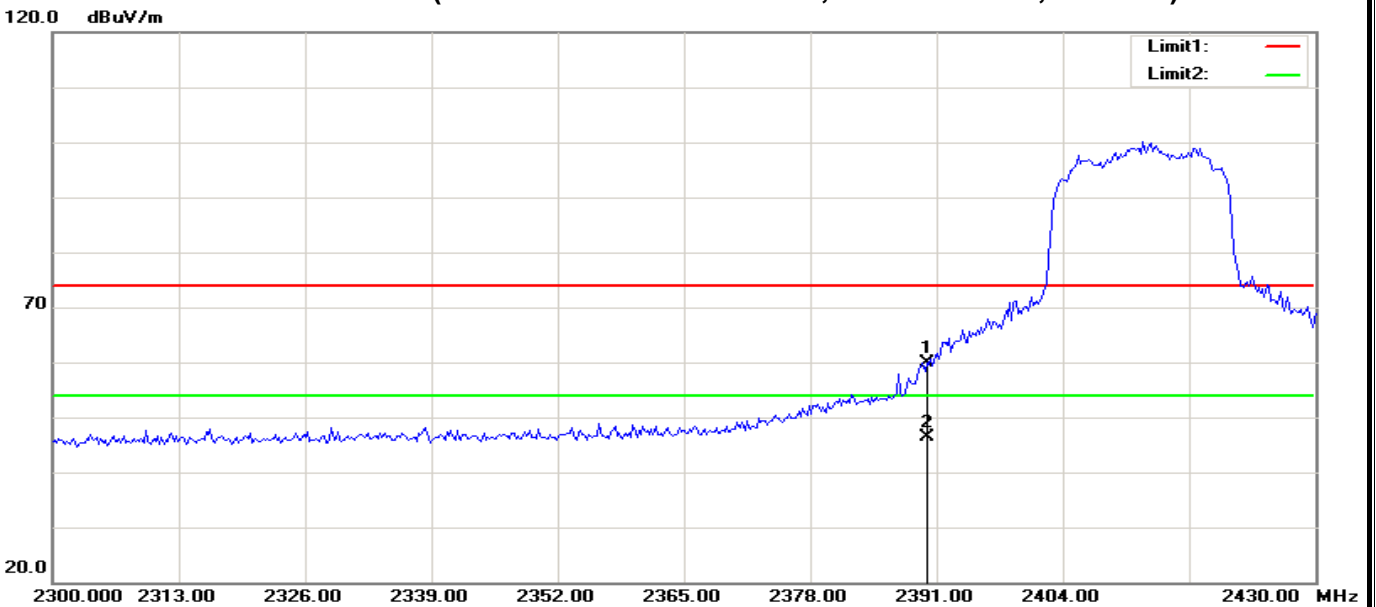


| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor(dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Height (cm) | Degree (deg.) | Remark |
|-----|-----------------|----------------|----------------------|-----------------|----------------|-------------|-------------|---------------|--------|
| 1 | 2390.000 | 67.12 | -7.31 | 59.81 | 74.00 | -14.19 | 100 | 276 | peak |
| 2 | 2390.000 | 53.73 | -7.31 | 46.42 | 54.00 | -7.58 | 100 | 216 | AVG |

RESTRICTED BANDEDGE (IEEE 802.11n HT20 mode, High Channel, Horizontal)

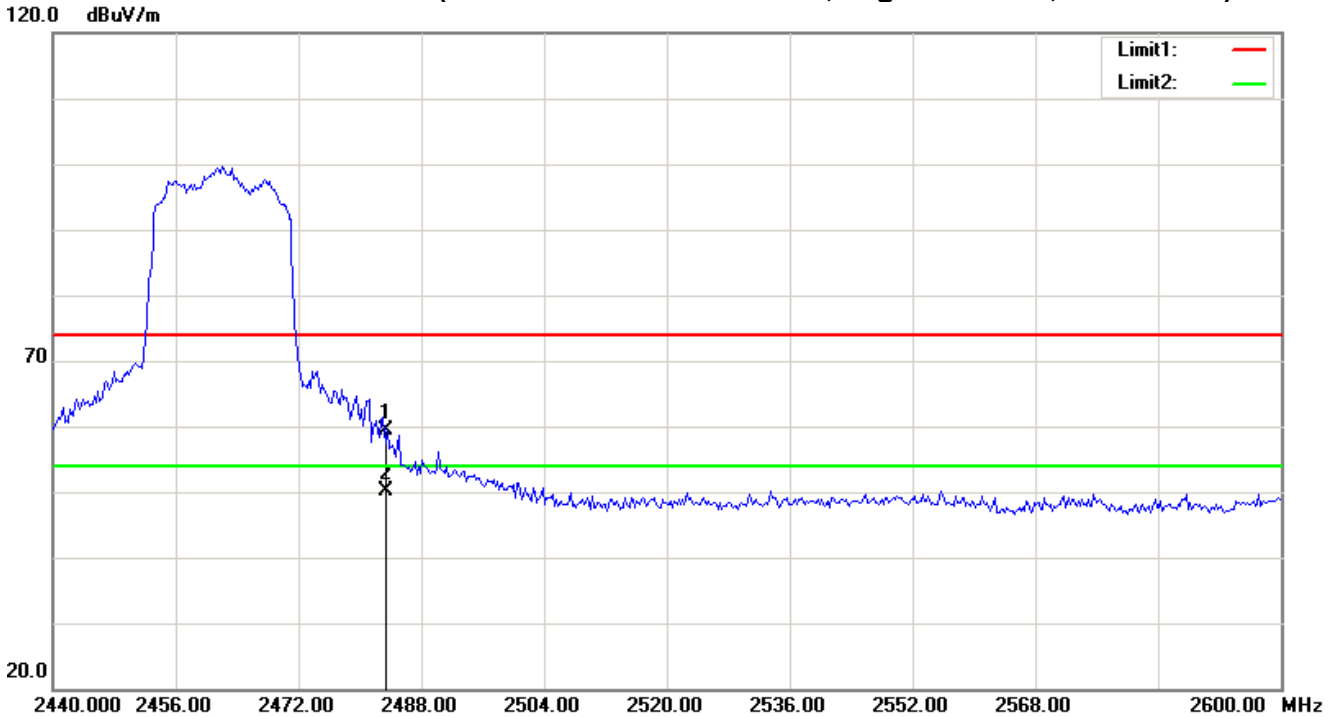


| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor(dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Height (cm) | Degree (deg.) | Remark |
|-----|-----------------|----------------|----------------------|-----------------|----------------|-------------|-------------|---------------|--------|
| 1 | 2483.500 | 65.74 | -6.44 | 59.30 | 74.00 | -14.70 | 100 | 145 | peak |
| 2 | 2483.500 | 56.59 | -6.44 | 50.15 | 54.00 | -3.85 | 100 | 346 | AVG |

RESTRICTED BANDEDGE (IEEE 802.11n HT20 mode, High Channel, Vertical)

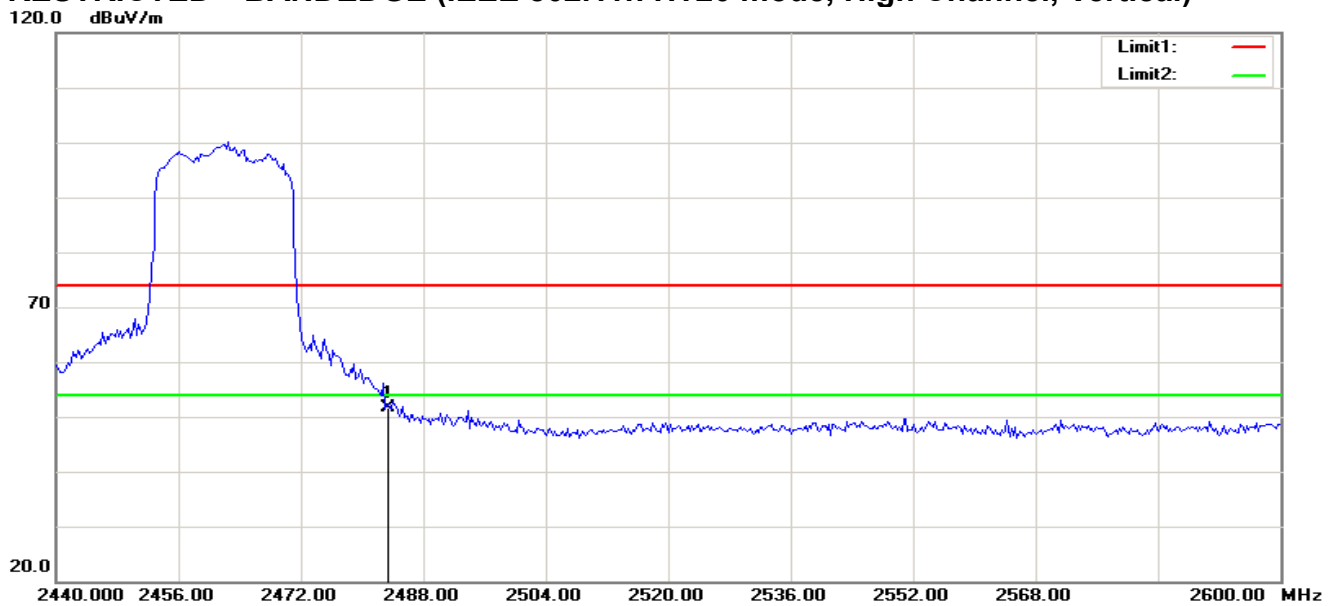


| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor(dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Height (cm) | Degree (deg.) | Remark |
|-----|-----------------|----------------|----------------------|-----------------|----------------|-------------|-------------|---------------|--------|
| 1 | 2483.500 | 58.14 | -6.44 | 51.70 | 74.00 | -22.30 | 100 | 126 | peak |

RESTRICTED BANDEDGE (IEEE 802.11n HT40 mode, Low Channel, Horizontal)

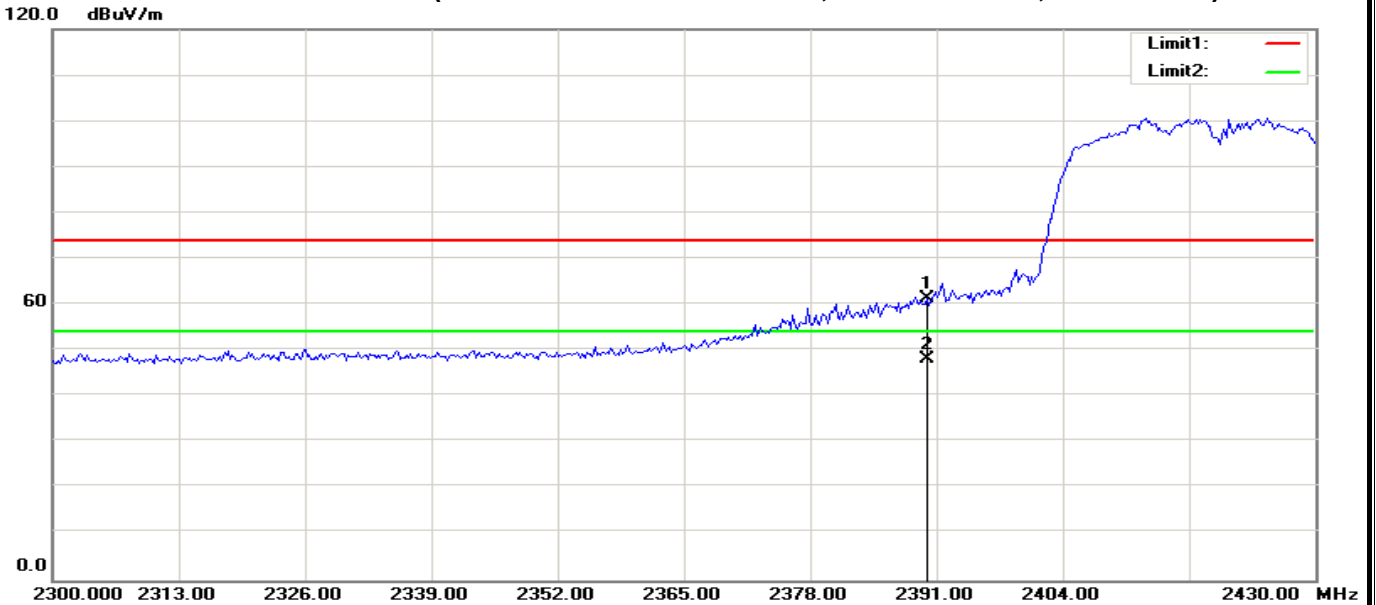


| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor(dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Height (cm) | Degree (deg.) | Remark |
|-----|-----------------|----------------|----------------------|-----------------|----------------|-------------|-------------|---------------|--------|
| 1 | 2390.000 | 68.70 | -7.31 | 61.39 | 74.00 | -12.61 | 200 | 129 | peak |
| 2 | 2390.000 | 55.52 | -7.31 | 48.21 | 54.00 | -5.79 | 200 | 150 | AVG |

RESTRICTED BANDEDGE (IEEE 802.11n HT40 mode, Low Channel, Vertical)

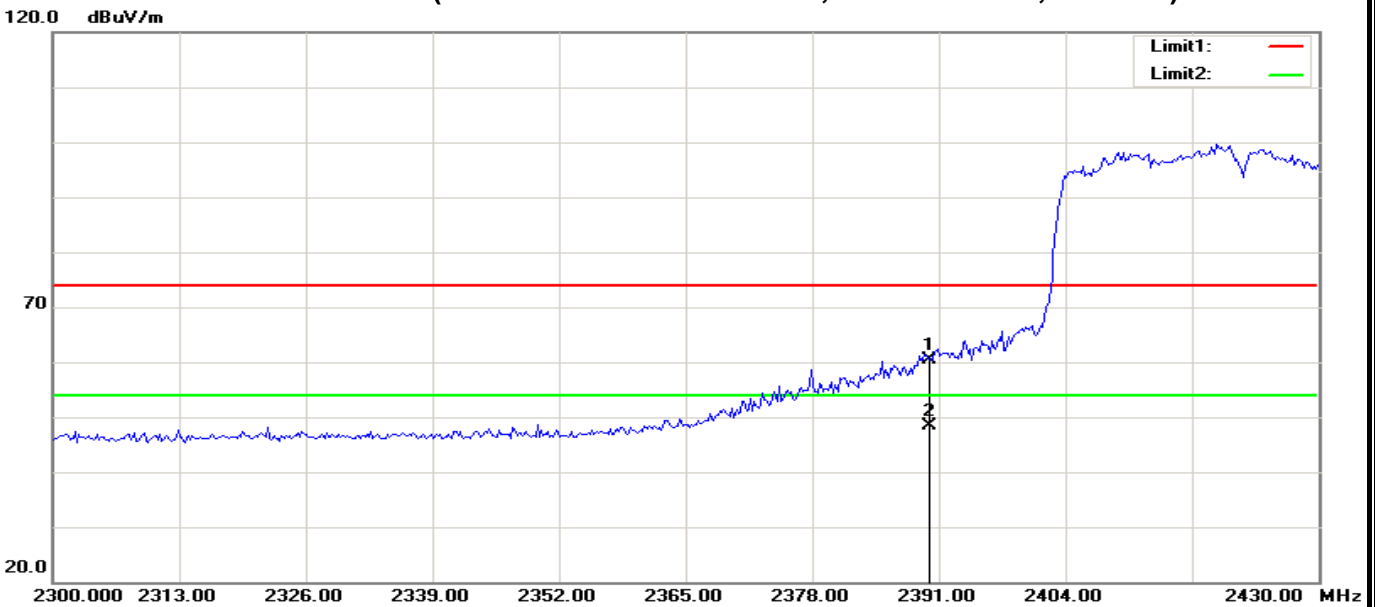


| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor(dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Height (cm) | Degree (deg.) | Remark |
|-----|-----------------|----------------|----------------------|-----------------|----------------|-------------|-------------|---------------|--------|
| 1 | 2390.000 | 67.68 | -7.31 | 60.37 | 74.00 | -13.63 | 200 | 283 | peak |
| 2 | 2390.000 | 55.77 | -7.31 | 48.46 | 54.00 | -5.54 | 200 | 217 | AVG |

RESTRICTED BANDEDGE (IEEE 802.11n HT40 mode, High Channel, Horizontal)

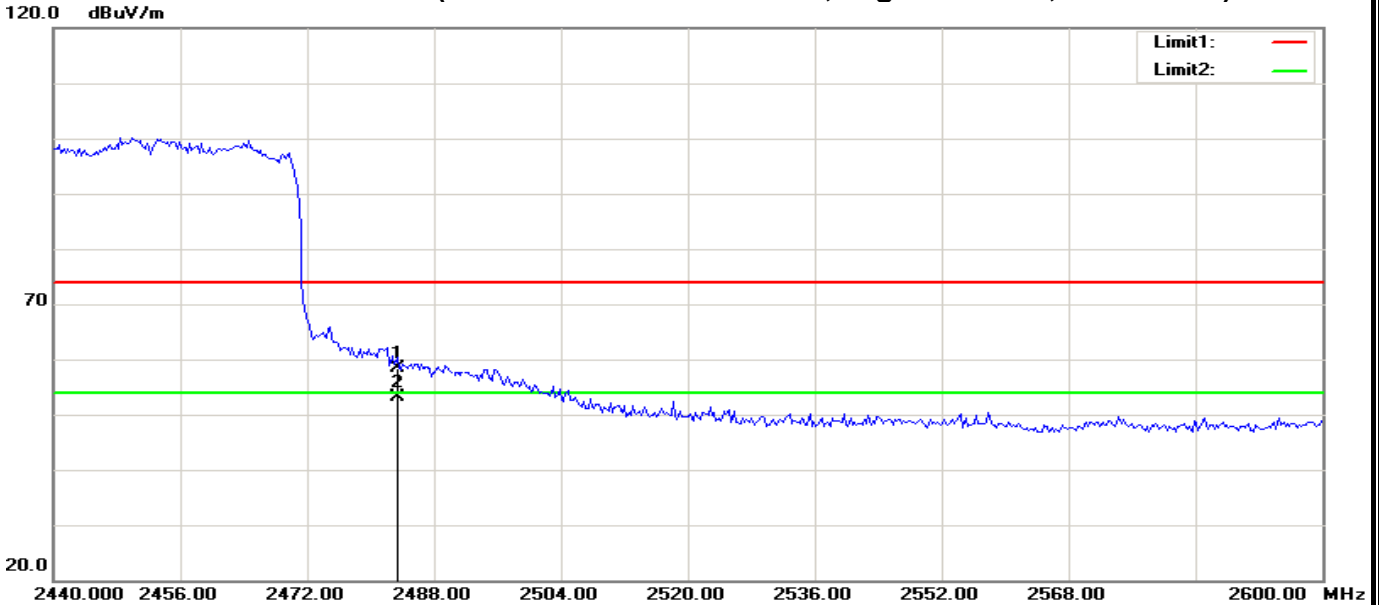

| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor(dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Height (cm) | Degree (deg.) | Remark |
|-----|-----------------|----------------|----------------------|-----------------|----------------|-------------|-------------|---------------|--------|
| 1 | 2483.500 | 64.76 | -6.44 | 58.32 | 74.00 | -15.68 | 200 | 132 | peak |
| 2 | 2483.500 | 59.45 | -6.44 | 53.01 | 54.00 | -0.99 | 200 | 366 | AVG |

RESTRICTED BANDEDGE (IEEE 802.11n HT40 mode, High Channel, Vertical)

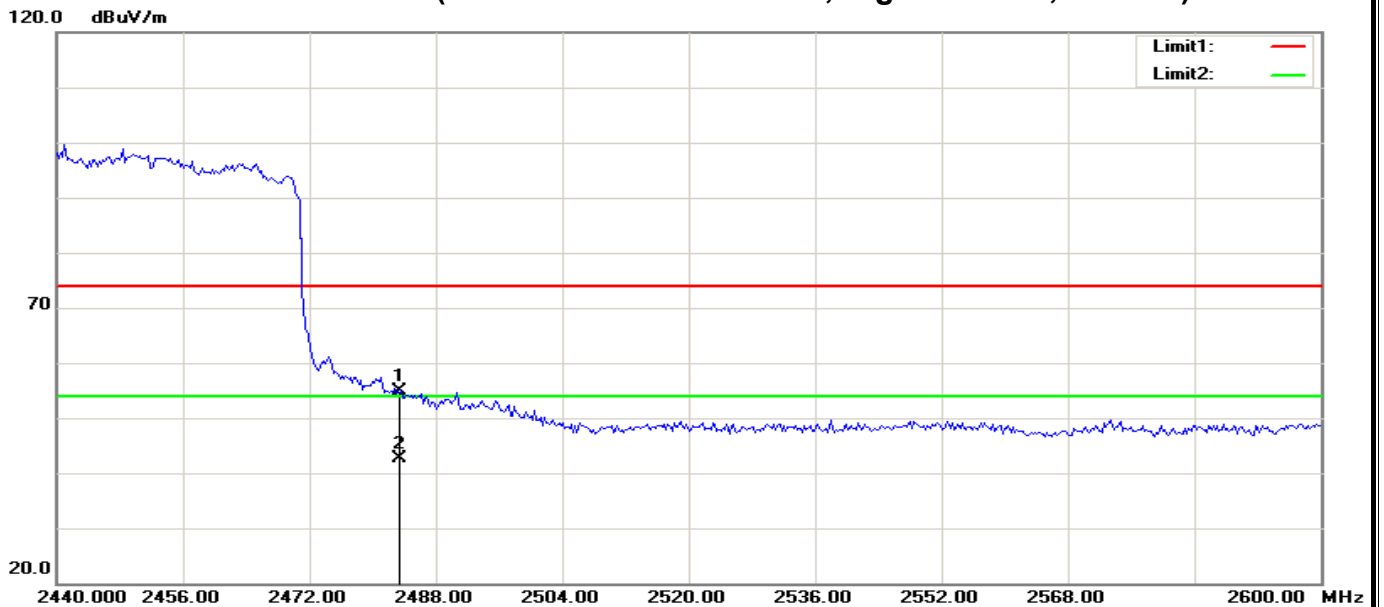

| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor(dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Height (cm) | Degree (deg.) | Remark |
|-----|-----------------|----------------|----------------------|-----------------|----------------|-------------|-------------|---------------|--------|
| 1 | 2483.500 | 61.31 | -6.44 | 54.87 | 74.00 | -19.13 | 100 | 101 | peak |
| 2 | 2483.500 | 49.01 | -6.44 | 42.57 | 54.00 | -11.43 | 100 | 153 | AVG |

Test Result of Radiated Emission

Below 30MHz

The interference of the frequency value is lower than the limit below 20 db, measured as the background noise values and will not be recorded.

30MHz-1GHz

| | | | |
|------------------------|-------------|-------------------|-------------|
| Operation Mode: | Normal Link | Test Date: | 2017-9-21 |
| Temperature: | 25°C | Tested by: | Lily.Wang |
| Humidity: | 48% RH | Polarity: | Ver. / Hor. |

| Frequency (MHz) | Ant. Pol. (H/V) | Reading (dBuV) | Correction Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----------------|-----------------|----------------|--------------------------|-----------------|----------------|-------------|--------|
| 143.4900 | V | 19.12 | 13.44 | 32.56 | 43.50 | -10.94 | peak |
| 167.7400 | V | 20.74 | 12.77 | 33.51 | 43.50 | -9.99 | peak |
| 263.7700 | V | 20.92 | 11.99 | 32.91 | 46.00 | -13.09 | peak |
| 385.0200 | V | 21.73 | 15.21 | 36.94 | 46.00 | -9.06 | peak |
| 431.5800 | V | 19.68 | 16.70 | 36.38 | 46.00 | -9.62 | peak |
| 880.6900 | V | 12.91 | 23.41 | 36.32 | 46.00 | -9.68 | peak |
| 97.9000 | H | 22.58 | 10.69 | 33.27 | 43.50 | -10.23 | peak |
| 215.2700 | H | 23.48 | 11.08 | 34.56 | 43.50 | -8.94 | peak |
| 263.7700 | H | 24.18 | 11.99 | 36.17 | 46.00 | -9.83 | peak |
| 385.0200 | H | 23.88 | 15.21 | 39.09 | 46.00 | -6.91 | peak |
| 424.7900 | H | 19.48 | 16.51 | 35.99 | 46.00 | -10.01 | peak |
| 880.6900 | H | 12.61 | 23.41 | 36.02 | 46.00 | -9.98 | peak |

Remark:

1. Measuring frequencies from 30 MHz to the 1GHz (No emission found between lowest internal used/generated frequency to 30 MHz).
2. Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using peak/quasi-peak detector mode.
3. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with "N/A" remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
4. Margin (dB) = Result (dBuV/m) – Limit (dBuV/m).

Above 1 GHz
Operation Mode: TX / IEEE 802.11b / CH Low

Test Date: 2017-9-19

Temperature: 24°C

Tested by: Lily.Wang

Humidity: 48 % RH

Polarity: Ver. / Hor.

Horizontal

| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor(dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Height (cm) | Degree (deg.) | Remark |
|-----|--------------------|-------------------|-------------------------|--------------------|-------------------|----------------|----------------|------------------|--------|
| 1 | 4814.103 | 48.14 | -5.26 | 42.88 | 74.00 | -31.12 | 100 | 301 | peak |
| 2 | 7238.782 | 44.29 | 6.32 | 50.61 | 74.00 | -23.39 | 100 | 149 | peak |
| N/A | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |

Vertical

| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor(dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Height (cm) | Degree (deg.) | Remark |
|-----|--------------------|-------------------|-------------------------|--------------------|-------------------|----------------|----------------|------------------|--------|
| 1 | 4814.103 | 49.03 | -5.26 | 43.77 | 74.00 | -30.23 | 100 | 24 | peak |
| 2 | 7238.782 | 44.06 | 6.32 | 50.38 | 74.00 | -23.62 | 100 | 10 | peak |
| N/A | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |

Operation Mode: TX / IEEE 802.11b / CH Mid

Test Date: 2017-9-19

Temperature: 24°C

Tested by: Lily.Wang

Humidity: 48 % RH

Polarity: Ver. / Hor.

Horizontal

| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor(dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Height (cm) | Degree (deg.) | Remark |
|-----|--------------------|-------------------|-------------------------|--------------------|-------------------|----------------|----------------|------------------|--------|
| 1 | 4868.590 | 46.63 | -5.22 | 41.41 | 74.00 | -32.59 | 100 | 291 | peak |
| 2 | 7320.513 | 41.77 | 6.40 | 48.17 | 74.00 | -25.83 | 100 | 316 | peak |
| N/A | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |

Vertical

| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor(dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Height (cm) | Degree (deg.) | Remark |
|-----|--------------------|-------------------|-------------------------|--------------------|-------------------|----------------|----------------|------------------|--------|
| 1 | 4868.590 | 49.44 | -5.22 | 44.22 | 74.00 | -29.78 | 100 | 23 | peak |
| 2 | 7320.513 | 43.29 | 6.40 | 49.69 | 74.00 | -24.31 | 100 | 183 | peak |
| N/A | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |

Operation Mode: TX / IEEE 802.11b / CH High

Test Date: 2017-9-19

Temperature: 24°C

Tested by:Lily.Wang

Humidity: 48 % RH

Polarity: Ver. / Hor.

Horizontal

| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor(dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Height (cm) | Degree (deg.) | Remark |
|-----|-----------------|----------------|----------------------|-----------------|----------------|-------------|-------------|---------------|--------|
| 1 | 4923.077 | 53.78 | -5.17 | 48.61 | 74.00 | -25.39 | 100 | 292 | peak |
| 2 | 7375.000 | 45.90 | 6.45 | 52.35 | 74.00 | -21.65 | 100 | 311 | peak |
| N/A | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |

Vertical

| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor(dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Height (cm) | Degree (deg.) | Remark |
|-----|-----------------|----------------|----------------------|-----------------|----------------|-------------|-------------|---------------|--------|
| 1 | 4923.077 | 54.14 | -5.17 | 48.97 | 74.00 | -25.03 | 100 | 122 | peak |
| 2 | 7375.000 | 46.52 | 6.45 | 52.97 | 74.00 | -21.03 | 100 | 182 | peak |
| N/A | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |

Operation Mode: TX / IEEE 802.11g / CH Low

Test Date: 2017-9-19

Temperature: 24°C

Tested by:Lily.Wang

Humidity: 48 % RH

Polarity: Ver. / Hor.

Horizontal

| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor(dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Height (cm) | Degree (deg.) | Remark |
|-----|-----------------|----------------|----------------------|-----------------|----------------|-------------|-------------|---------------|--------|
| 1 | 4923.077 | 52.61 | -5.17 | 47.44 | 74.00 | -26.56 | 100 | 292 | peak |
| 2 | 7375.000 | 45.18 | 6.45 | 51.63 | 74.00 | -22.37 | 100 | 309 | peak |
| N/A | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |

Vertical

| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor(dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Height (cm) | Degree (deg.) | Remark |
|-----|-----------------|----------------|----------------------|-----------------|----------------|-------------|-------------|---------------|--------|
| 1 | 4923.077 | 54.58 | -5.17 | 49.41 | 74.00 | -24.59 | 100 | 30 | peak |
| 2 | 7375.000 | 45.56 | 6.45 | 52.01 | 74.00 | -21.99 | 100 | 8 | peak |
| N/A | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |

Operation Mode: TX / IEEE 802.11g / CH Mid

Test Date: 2017-9-19

Temperature: 24°C

Tested by: Lily.Wang

Humidity: 48 % RH

Polarity: Ver. / Hor.

Horizontal

| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor(dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Height (cm) | Degree (deg.) | Remark |
|-----|-----------------|----------------|----------------------|-----------------|----------------|-------------|-------------|---------------|--------|
| 1 | 4868.590 | 49.39 | -5.22 | 44.17 | 74.00 | -29.83 | 100 | 279 | peak |
| 2 | 7320.513 | 52.25 | 6.40 | 58.65 | 74.00 | -15.35 | 100 | 264 | peak |
| 3 | 7320.513 | 37.34 | 6.40 | 43.74 | 54.00 | -10.26 | 200 | 281 | AVG |
| N/A | | | | | | | | | |
| | | | | | | | | | |

Vertical

| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor(dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Height (cm) | Degree (deg.) | Remark |
|-----|-----------------|----------------|----------------------|-----------------|----------------|-------------|-------------|---------------|--------|
| 1 | 4868.590 | 52.29 | -5.22 | 47.07 | 74.00 | -26.93 | 100 | 63 | peak |
| 2 | 7293.269 | 53.26 | 6.37 | 59.63 | 74.00 | -14.37 | 100 | 292 | peak |
| 3 | 7293.269 | 33.11 | 6.37 | 39.48 | 54.00 | -14.52 | 100 | 295 | AVG |
| N/A | | | | | | | | | |
| | | | | | | | | | |

Operation Mode: TX / IEEE 802.11g / CH High

Test Date: 2017-9-19

Temperature: 24°C

Tested by: Lily.Wang

Humidity: 48 % RH

Polarity: Ver. / Hor.

Horizontal

| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor(dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Height (cm) | Degree (deg.) | Remark |
|-----|-----------------|----------------|----------------------|-----------------|----------------|-------------|-------------|---------------|--------|
| 1 | 4923.077 | 51.37 | -5.17 | 46.20 | 74.00 | -27.80 | 100 | 279 | peak |
| 2 | 7375.000 | 49.33 | 6.45 | 55.78 | 74.00 | -18.22 | 100 | 270 | peak |
| 3 | 7375.000 | 34.48 | 6.45 | 40.93 | 54.00 | -13.07 | 100 | 3 | AVG |
| N/A | | | | | | | | | |
| | | | | | | | | | |

Vertical

| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor(dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Height (cm) | Degree (deg.) | Remark |
|-----|-----------------|----------------|----------------------|-----------------|----------------|-------------|-------------|---------------|--------|
| 1 | 4923.077 | 55.21 | -5.17 | 50.04 | 74.00 | -23.96 | 100 | 71 | peak |
| 2 | 7375.000 | 49.72 | 6.45 | 56.17 | 74.00 | -17.83 | 100 | 291 | peak |
| 3 | 7375.000 | 38.45 | 6.45 | 44.90 | 54.00 | -9.10 | 200 | 286 | AVG |
| N/A | | | | | | | | | |
| | | | | | | | | | |

Operation Mode: TX / IEEE 802.11n HT20 mode / CH Low
Temperature: 24°C
Humidity: 48 % RH

Test Date: 2017-9-19
Tested by: Lily.Wang
Polarity: Ver. / Hor.

Horizontal

| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor(dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Height (cm) | Degree (deg.) | Remark |
|-----|-----------------|----------------|----------------------|-----------------|----------------|-------------|-------------|---------------|--------|
| 1 | 4814.103 | 44.66 | -5.26 | 39.40 | 74.00 | -34.60 | 100 | 222 | peak |
| 2 | 7238.782 | 46.91 | 6.32 | 53.23 | 74.00 | -20.77 | 100 | 105 | peak |
| N/A | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |

Vertical

| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor(dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Height (cm) | Degree (deg.) | Remark |
|-----|-----------------|----------------|----------------------|-----------------|----------------|-------------|-------------|---------------|--------|
| 1 | 4814.103 | 52.80 | -5.26 | 47.54 | 74.00 | -26.46 | 100 | 275 | peak |
| 2 | 7238.782 | 49.74 | 6.32 | 56.06 | 74.00 | -17.94 | 100 | 113 | peak |
| 3 | 7238.782 | 37.87 | 6.32 | 44.19 | 54.00 | -9.81 | 187 | 112 | AVG |
| N/A | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |

Operation Mode: TX / IEEE 802.11n HT20 mode / CH Mid
Temperature: 24°C
Humidity: 48 % RH

Test Date: 2017-9-19
Tested by: Lily.Wang
Polarity: Ver. / Hor.

Horizontal

| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor(dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Height (cm) | Degree (deg.) | Remark |
|-----|-----------------|----------------|----------------------|-----------------|----------------|-------------|-------------|---------------|--------|
| 1 | 4868.590 | 39.81 | -5.22 | 34.59 | 74.00 | -39.41 | 100 | 67 | peak |
| 2 | 7347.756 | 39.67 | 6.42 | 46.09 | 74.00 | -27.91 | 100 | 49 | peak |
| N/A | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |

Vertical

| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor(dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Height (cm) | Degree (deg.) | Remark |
|-----|-----------------|----------------|----------------------|-----------------|----------------|-------------|-------------|---------------|--------|
| 1 | 4868.590 | 43.05 | -5.22 | 37.83 | 74.00 | -36.17 | 100 | 142 | peak |
| 2 | 7157.051 | 41.95 | 6.25 | 48.20 | 74.00 | -25.80 | 100 | 302 | peak |
| N/A | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |

Operation Mode: TX / IEEE 802.11n HT20 mode / CH High **Test Date:** 2017-9-19

Temperature: 24°C

Tested by: Lily.Wang

Humidity: 48 % RH

Polarity: Ver. / Hor.

Horizontal

| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor(dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Height (cm) | Degree (deg.) | Remark |
|-----|--------------------|-------------------|-------------------------|--------------------|-------------------|----------------|----------------|------------------|--------|
| 1 | 4923.077 | 47.91 | -5.17 | 42.74 | 74.00 | -31.26 | 100 | 284 | peak |
| 2 | 7375.000 | 45.65 | 6.45 | 52.10 | 74.00 | -21.90 | 100 | 4 | peak |
| N/A | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |

Vertical

| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor(dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Height (cm) | Degree (deg.) | Remark |
|-----|--------------------|-------------------|-------------------------|--------------------|-------------------|----------------|----------------|------------------|--------|
| 1 | 4923.077 | 51.17 | -5.17 | 46.00 | 74.00 | -28.00 | 100 | 339 | peak |
| 2 | 7375.000 | 46.78 | 6.45 | 53.23 | 74.00 | -20.77 | 100 | 207 | peak |
| N/A | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |

Operation Mode: TX / IEEE 802.11n HT40 mode / CH Low

Test Date: 2017-9-19

Temperature: 24°C

Tested by: Lily.Wang

Humidity: 48 % RH

Polarity: Ver. / Hor.

Horizontal

| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor(dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Height (cm) | Degree (deg.) | Remark |
|-----|--------------------|-------------------|-------------------------|--------------------|-------------------|----------------|----------------|------------------|--------|
| 1 | 4841.346 | 43.83 | -5.24 | 38.59 | 74.00 | -35.41 | 100 | 280 | peak |
| 2 | 7238.782 | 42.21 | 6.32 | 48.53 | 74.00 | -25.47 | 100 | 22 | peak |
| N/A | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |

Vertical

| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor(dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Height (cm) | Degree (deg.) | Remark |
|-----|--------------------|-------------------|-------------------------|--------------------|-------------------|----------------|----------------|------------------|--------|
| 1 | 4841.346 | 47.57 | -5.24 | 42.33 | 74.00 | -31.67 | 100 | 336 | peak |
| 2 | 7266.026 | 43.78 | 6.35 | 50.13 | 74.00 | -23.87 | 100 | 116 | peak |
| N/A | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |

Operation Mode: TX / IEEE 802.11n HT40 mode / CH Mid
Temperature: 24°C
Humidity: 48 % RH

Test Date: 2017-9-19
Tested by: Lily.Wang
Polarity: Ver. / Hor.

Horizontal

| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor(dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Height (cm) | Degree (deg.) | Remark |
|-----|-----------------|----------------|----------------------|-----------------|----------------|-------------|-------------|---------------|--------|
| 1 | 4868.590 | 45.05 | -5.22 | 39.83 | 74.00 | -34.17 | 100 | 285 | peak |
| 2 | 7293.269 | 42.69 | 6.37 | 49.06 | 74.00 | -24.94 | 100 | 20 | peak |
| N/A | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |

Vertical

| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor(dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Height (cm) | Degree (deg.) | Remark |
|-----|-----------------|----------------|----------------------|-----------------|----------------|-------------|-------------|---------------|--------|
| 1 | 4868.590 | 50.27 | -5.22 | 45.05 | 74.00 | -28.95 | 100 | 341 | peak |
| 2 | 7293.269 | 44.14 | 6.37 | 50.51 | 74.00 | -23.49 | 100 | 175 | peak |
| N/A | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |

Operation Mode: TX / IEEE 802.11n HT40 mode / CH High **Test Date:** 2017-9-19
Temperature: 24°C **Tested by:** Lily.Wang
Humidity: 48 % RH **Polarity:** Ver. / Hor.

Horizontal

| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor(dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Height (cm) | Degree (deg.) | Remark |
|-----|-----------------|----------------|----------------------|-----------------|----------------|-------------|-------------|---------------|--------|
| 1 | 4895.833 | 46.54 | -5.19 | 41.35 | 74.00 | -32.65 | 100 | 280 | peak |
| 2 | 7347.756 | 41.43 | 6.42 | 47.85 | 74.00 | -26.15 | 100 | 4 | peak |
| N/A | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |

Vertical

| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor(dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Height (cm) | Degree (deg.) | Remark |
|-----|-----------------|----------------|----------------------|-----------------|----------------|-------------|-------------|---------------|--------|
| 1 | 4895.833 | 50.57 | -5.19 | 45.38 | 74.00 | -28.62 | 100 | 346 | peak |
| 2 | 7347.756 | 42.17 | 6.42 | 48.59 | 74.00 | -25.41 | 100 | 170 | peak |
| N/A | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |

7.7.POWERLINE CONDUCTED EMISSIONS

LIMIT

According to §15.207(a), except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 µH/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

| Frequency Range (MHz) | Limits (dBµV) | |
|-----------------------|---------------|-----------|
| | Quasi-peak | Average |
| 0.15 to 0.50 | 66 to 56* | 56 to 46* |
| 0.50 to 5 | 56 | 46 |
| 5 to 30 | 60 | 50 |

* Decreases with the logarithm of the frequency.

Test Configuration

See test photographs attached in Appendix 1 for the actual connections between EUT and support equipment.

TEST PROCEDURE


- 1.The EUT was placed on a table, which is 0.8m above ground plane.
- 2.Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 3.Repeat above procedures until all frequency measured were complete.

TEST RESULTS

The initial step in collecting conducted data is a spectrum analyzer peak scan of the measurement range. Significant peaks are then marked as shown on the following data page, and these signals are then quasi-peaked.

TEST DATA


| | | | |
|------------|-----------------|-------------------|--------------|
| Job No.: | C170913R02 | Date: | 2017/9/25 |
| Model No.: | AS02-PAR38NAE26 | Time: | 16:18:04 |
| Standard: | FCC Class B | Temp.(C)/Hum.(%): | 22(C)/41% |
| Test item: | Conduction test | Test By: | King.Xu |
| Line: | L1 | Test Voltage: | AC 120V/60Hz |
| Model: | | Description: | |

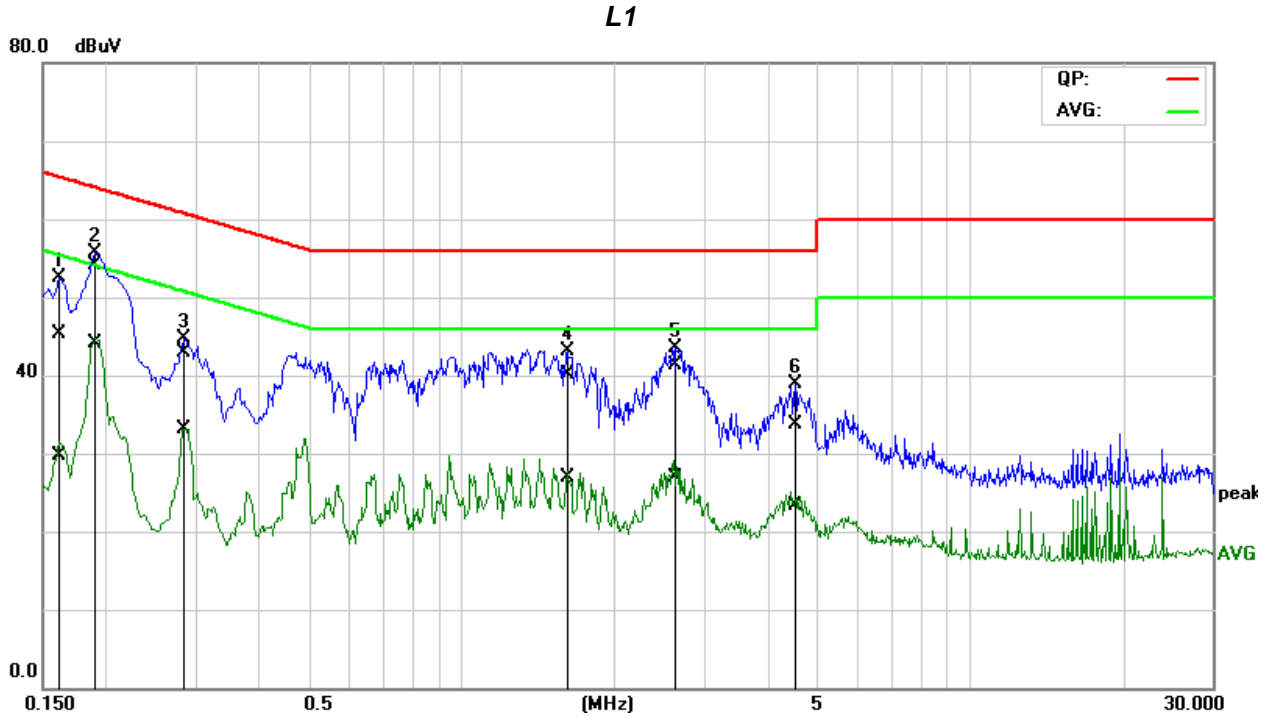

| No. | Frequency (MHz) | QuasiPeak reading (dBuV) | Average reading (dBuV) | Correction factor (dB) | QuasiPeak result (dBuV) | Average result (dBuV) | QuasiPeak limit (dBuV) | Average limit (dBuV) | QuasiPeak margin (dB) | Average margin (dB) | Remark |
|-----|-----------------|--------------------------|------------------------|------------------------|-------------------------|-----------------------|------------------------|----------------------|-----------------------|---------------------|--------|
| 1 | 0.1608 | 24.75 | 9.13 | 20.57 | 45.32 | 29.70 | 65.42 | 55.42 | -20.10 | -25.72 | Pass |
| 2* | 0.1887 | 33.50 | 23.52 | 20.53 | 54.03 | 44.05 | 64.09 | 54.09 | -10.06 | -10.04 | Pass |
| 3 | 0.2844 | 22.34 | 12.62 | 20.50 | 42.84 | 33.12 | 60.69 | 50.69 | -17.85 | -17.57 | Pass |
| 4 | 1.6147 | 19.57 | 6.46 | 20.46 | 40.03 | 26.92 | 56.00 | 46.00 | -15.97 | -19.08 | Pass |
| 5 | 2.6038 | 20.84 | 6.50 | 20.50 | 41.34 | 27.00 | 56.00 | 46.00 | -14.66 | -19.00 | Pass |
| 6 | 4.5368 | 13.06 | 2.72 | 20.59 | 33.65 | 23.31 | 56.00 | 46.00 | -22.35 | -22.69 | Pass |

Note: 1. L1 = Line One (Live Line) / L2 = Line Two (Neutral Line).

| | | | |
|------------|-----------------|-------------------|--------------|
| Job No.: | C170913R02 | Date: | 2017/9/25 |
| Model No.: | AS02-PAR38NAE26 | Time: | 16:18:04 |
| Standard: | FCC Class B | Temp.(C)/Hum.(%): | 22(C)/41% |
| Test item: | Conduction test | Test By: | King.Xu |
| Line: | L2 | Test Voltage: | AC 120V/60Hz |
| Model: | | Description: | |

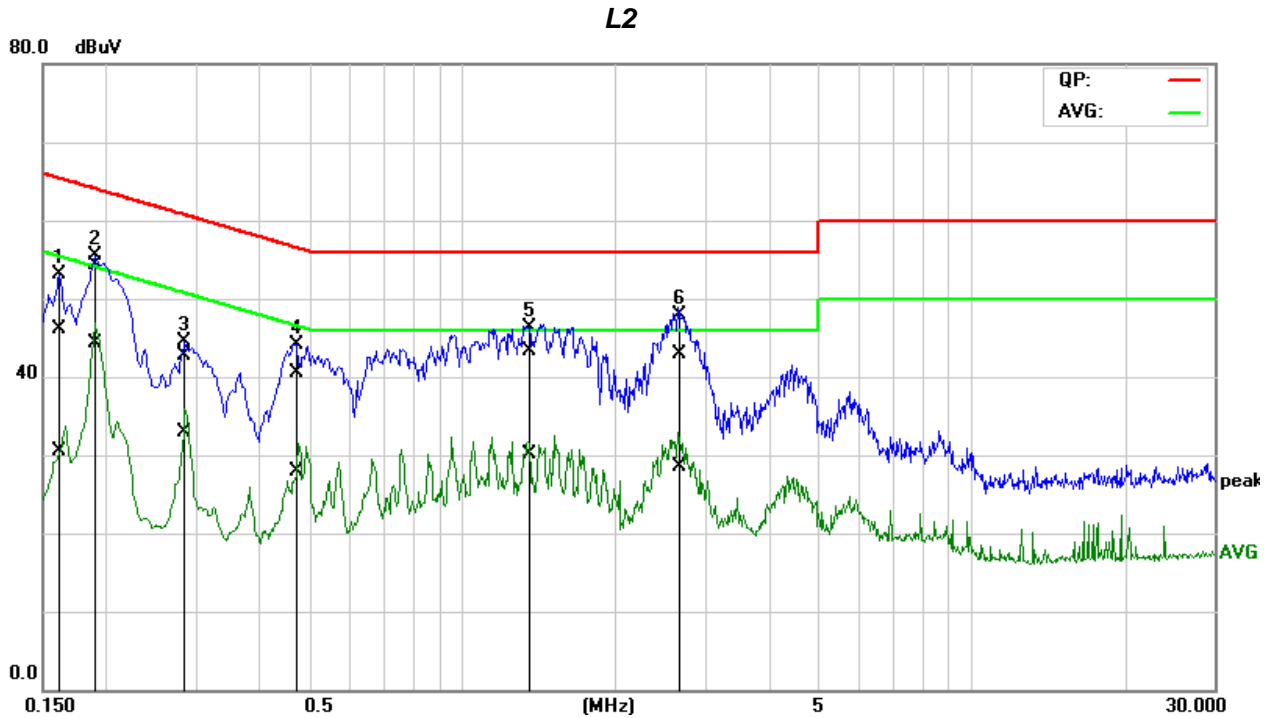

| No. | Frequency (MHz) | QuasiPeak reading (dBuV) | Average reading (dBuV) | Correction factor (dB) | QuasiPeak result (dBuV) | Average result (dBuV) | QuasiPeak limit (dBuV) | Average limit (dBuV) | QuasiPeak margin (dB) | Average margin (dB) | Remark |
|-----|-----------------|--------------------------|------------------------|------------------------|-------------------------|-----------------------|------------------------|----------------------|-----------------------|---------------------|--------|
| 1 | 0.1628 | 25.80 | 10.20 | 20.37 | 46.17 | 30.57 | 65.32 | 55.32 | -19.15 | -24.75 | Pass |
| 2* | 0.1894 | 33.83 | 23.92 | 20.39 | 54.22 | 44.31 | 64.06 | 54.06 | -9.84 | -9.75 | Pass |
| 3 | 0.2839 | 22.20 | 12.46 | 20.45 | 42.65 | 32.91 | 60.70 | 50.70 | -18.05 | -17.79 | Pass |
| 4 | 0.4711 | 20.12 | 7.53 | 20.45 | 40.57 | 27.98 | 56.49 | 46.49 | -15.92 | -18.51 | Pass |
| 5 | 1.3539 | 22.77 | 9.71 | 20.48 | 43.25 | 30.19 | 56.00 | 46.00 | -12.75 | -15.81 | Pass |
| 6 | 2.6888 | 22.32 | 8.02 | 20.58 | 42.90 | 28.60 | 56.00 | 46.00 | -13.10 | -17.40 | Pass |

- Note:** 1. L1 = Line One (Live Line) / L2 = Line Two (Neutral Line).
- Remark:
- The measuring frequencies range between 0.15 MHz and 30 MHz.
 - The emissions measured in the frequency range between 0.15 MHz and 30MHz were made with an instrument using Quasi-peak detector and Average detector.
 - "---" denotes the emission level was or more than 2dB below the Average limit, and no re-check was made.
 - The IF bandwidth of SPA between 0.15MHz and 30MHz was 10KHz. The IF bandwidth of Test Receiver between 0.15MHz and 30MHz was 9kHz.

END OF REPORT