



# **OTA TEST REPORT**

Applicant	Sengled Co.,Ltd.
Product	Sengled Wifi Module
Model	WF866
Brand	Sengled
Report No.	Y2209A0971-T1
Issue Date	October 28, 2022

TA Technology (Shanghai) Co., Ltd. tested the above equipment in accordance with the requirements in **ANSI/IEEE Std 149-2008.** The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Xn Ying

Prepared by: Xu Ying

Kei

Approved by: Xu Kai

## TA Technology (Shanghai) Co., Ltd.

Building 3, No.145, Jintang Rd, Pudong Shanghai, P.R.China TEL: +86-021-50791141/2/3 FAX: +86-021-50791141/2/3-8000



## TABLE OF CONTENTS

1.	Test La	aboratory	. 3
	1.1.	Notes of the Test Report	. 3
	1.2.	Test facility	. 3
	1.3.	Testing Location	. 3
	1.4.	Laboratory Environment	. 4
2.	Genera	al Description of Equipment under Test	. 5
	2.1.	Applicant and Manufacturer Information	. 5
	2.2.	General information	. 5
	2.3.	Test Date	. 5
	2.4.	Receiving Date	
	2.5.	Applied Standards	. 6
3.	Test C	onditions	. 7
	3.1.	Test Configuration	. 7
	3.2.	Test Measurement	. 7
4.	Test R	esults	
	4.1.	Gain and Efficiency	. 8
5.	Equipr	nent List	. 9
ANNE	KA 3-[	D Pattern Plots	10
	<b>х в. т</b> і	e EUT Appearance and Test Configuration	11
	B.1 EL	IT Appearance	11
	B.2 Te	st Configuration	12



#### 1. Test Laboratory

#### 1.1. Notes of the Test Report

This report shall not be reproduced in full or partial, without the written approval of **TA Technology (Shanghai) Co., Ltd.** The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein .Measurement Uncertainties were not taken into account and are published for informational purposes only. This report is written to support regulatory compliance of the applicable standards stated above.


#### 1.2. Test facility

#### A2LA (Certificate Number: 3857.01)

TA Technology (Shanghai) Co., Ltd. has been listed by American Association for Laboratory Accreditation to perform measurement.


#### 1.3. Testing Location

Company:	TA Technology (Shanghai) Co., Ltd.
Address:	Building 3, No.145, Jintang Rd, Pudong Shanghai, P.R.China
City:	Shanghai
Post code:	201201
Countr <mark>y:</mark>	P. R. China
Contact:	Xu Kai
Telephone:	+86-021-50791141/2/3
Fax:	+86-021-50791141/2/3-8000
Website:	http://www.ta-shanghai.com
E-mail:	xukai@ta-shanghai.com



#### 1.4. Laboratory Environment

Temperature	Min. =19°C,Max. = 25°C		
Relative humidity	Min. =40%, Max. =72%		
Shield effect	0.7-6GHz	> 100dB	
Ground resistance	<0.5Ω		



## 2. General Description of Equipment under Test

#### 2.1. Applicant and Manufacturer Information

Applicant Name	Sengled Co.,Ltd.
Applicant address	Room 103/02-B,Floor 1, Building 1, No. 498, Guoshoujing Road, Pilot Free Trade Zone Shanghai China
Manufacturer Name	Sengled Co.,Ltd.
Manufacturer address	Room 103/02-B,Floor 1, Building 1, No. 498, Guoshoujing Road, Pilot Free Trade Zone Shanghai China

#### 2.2. General information

EUT Description			
Product Name:	Sengled Wifi Module		
Model	WF866		
SN:	001		
HW Version:	V2		
SW Version:	V1		
Antenna Type:	PCB Antenna		
Antenna Manufacturer:	Sengled Co.,Ltd.		
Test Frequency:	2400MHz ~ 2480MHz		
Test Frequency:	•		

All indications of Pass/Fail in this report are opinions expressed by TA Technology (Shanghai) Co., Ltd. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only.

#### 2.3. Test Date

The test is performed from October 9, 2022.

#### 2.4. Receiving Date

The sample was received on October 1, 2022.



#### 2.5. Applied Standards

According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

Test Method: ANSI/IEEE Std 149-2008





## 3. Test Conditions

#### 3.1. Test Configuration

Great-Circle-Cut method is used to measure the antenna 3D GAIN of EUT in OTA qualified anechoic chamber. Equipment Under Test (EUT) geometry centre vertical projection at the centre of platform, the distance from EUT to measurement antenna is 5m.

#### 3.2. Test Measurement

#### Spherical coordinate system








Figure 1 Test coordinate system

Note: Theta is from 0~180 degree. Phi is from 0~360. Rotate the EUT and record the Data, the step of rotation is 15 degree.

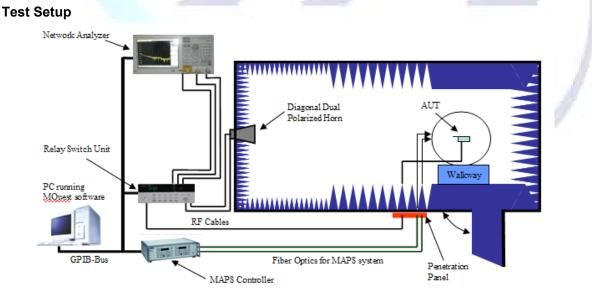

 TA Technology (Shanghai) Co., Ltd.
 TA-MB-04-008O

 This report shall not be reproduced except in full, without the written approval of TA Technology (Shanghai) Co., Ltd.





## 4. Test Results

#### 4.1. Gain and Efficiency

Test Item	Test State	Frequency (MHz)	Efficiency (%)	Gain (dBi)	Note
3D Gain	_	2400	25.42	0.22	
	FS	2402	26.36	0.03	/
		2441	48.62	2.13	
		2480	62.53	3.36	





Report No: Y2209A0971-T1


## 5. Equipment List

Type of Equipment	Manufacture	Model Number	S/N	Calibration Date	Expiration Time
Anechoic Chamber	ETS	AMS-8500	CT-001157-1219	2020-05-17	2025-05-16
Diagonal Dual Polarized Horn	ETS	ETS 3164- 04	00062743	2020-04-14	2025-04-13
Network Analyzer	Keysight	E5071B	MY42404014	2022-05-14	2023-05-13
Test Software	ETS	EMQuest™	REV 1.0.9		
EMCenter_Switch Control System	ETS	7006/7001	00059957/MY42001152		





## ANNEX A 3-D Pattern Plots

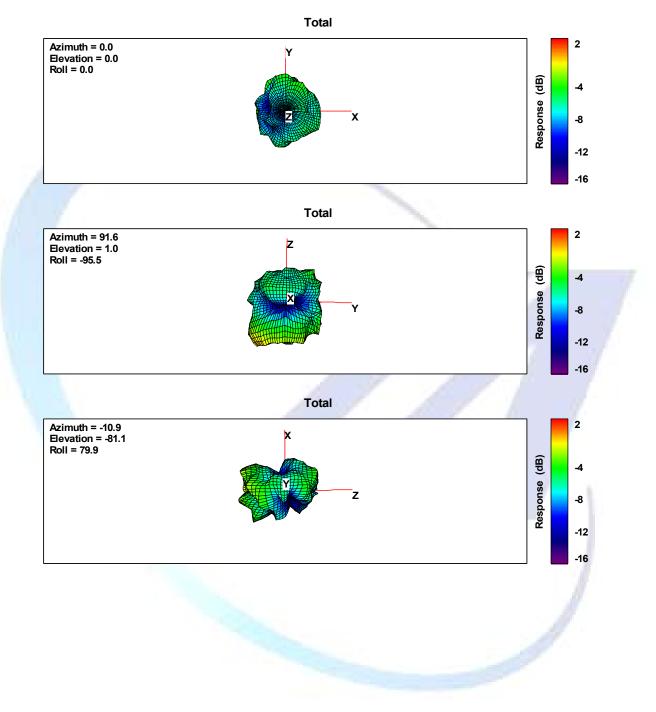




## ANNEX B: The EUT Appearance and Test Configuration

## B.1 EUT Appearance

Picture 1 Constituents of EUT



#### **B.2 Test Configuration**

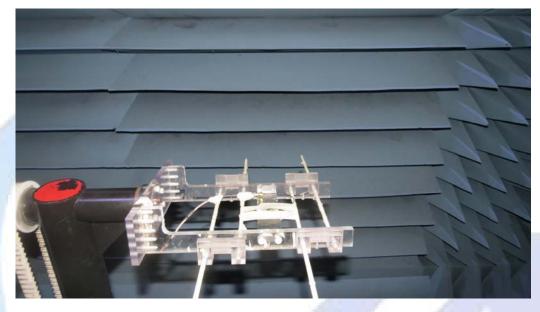

Picture 2 Test Setup
\*\*\*\*\*\*END OF REPORT \*\*\*\*\*\*