

FCC PART 15E TEST REPORT FOR CERTIFICATION
On Behalf of

Audio Pro AB

MULTICONNECTED WIRELESS LOUDSPEAKER

Model Number: A15

FCC ID: 2AGNC-A15

Prepared for:	Audio Pro AB
	Garnisonsgatan 52, 25466 Helsingborg, Sweden
Prepared By:	EST Technology Co., Ltd.
	Chilingxiang, Qishantou, Santun, Houjie, Dongguan, Guangdong, China
	Tel: 86-769-83081888-808

Report Number:	ESTE-R2109157
Date of Test:	Jun.18~Sep. 08, 2021
Date of Report:	Sep. 13, 2021

TABLE OF CONTENTS

Description	Page
TEST REPORT VERIFICATION.....	3
1. GENERAL INFORMATION.....	5
1.1. Description of Device (EUT)	5
1.2. The antenna information for EUT	6
2. SUMMARY OF TEST	7
2.1. Summary of test result.....	7
2.2. Test Facilities	8
2.3. Measurement uncertainty for EST Technology Co., Ltd.	9
2.4. Assistant equipment used for test.....	9
2.5. Block Diagram	9
2.6. Test Mode.....	10
2.7. Channel List	12
2.8. Power Setting of Test Software.....	13
2.9. Duty Cycle of Test Signal	14
2.10. Test Equipment List	18
3. 6dB BANDWIDTH & 26dB BANDWIDTH & 99% OCCUPIED BANDWIDTH.....	20
3.1. Limit	20
3.2. Test Setup	20
3.3. Spectrum Analyzer Setting.....	20
3.4. Test Procedure	21
3.5. Test Result	22
3.6. Test Result	24
4. MAXIMUM CONDUCTED OUTPUT POWER	44
4.1. Limit	44
4.2. Test Setup	44
4.3. Test Procedure	44
4.4. Test Result	45
5. PEAK POWER SPECTRAL DENSITY	47
5.1. Limit	47
5.2. Test Setup	47
5.3. Spectrum Analyzer Setting.....	47
5.4. Test Procedure	47
5.5. Test Result	48
6. UNWANTED EMISSIONS AND BAND EDGE	62
6.1. Limit	62
6.2. Test Setup	63
6.3. Spectrum Analyzer Setting.....	64
6.4. Test Procedure	65
6.5. Test Result	66
7. FREQUENCY STABILITY	94
7.1. Limit	94
7.2. Test Setup	94
7.3. Spectrum Analyzer Setting.....	94
7.4. Test Procedure	95

7.5. Test Result..... 96

8. AC POWER LINE CONDUCTED EMISSIONS98

8.1. Limit..... 98

8.2. Test Setup..... 98

8.3. Spectrum Analyzer Setting..... 98

8.4. Test Procedure..... 98

8.5. Test Result..... 99

9. ANTENNA REQUIREMENTS103




9.1. Limit..... 103

9.2. Test Result..... 103

10. TEST SETUP PHOTO.....104

11. EUT PHOTO.....106

EST Technology Co., Ltd.

Applicant:	Audio Pro AB		
Address:	Garnisonsgatan 52, 25466 Helsingborg, Sweden		
Manufacturer:	Audio Pro AB		
Address:	Garnisonsgatan 52, 25466 Helsingborg, Sweden		
E.U.T:	MULTICONNECTED WIRELESS LOUDSPEAKER		
Model Number:	A15		
Power Supply:	AC 100~240V, 50/60Hz, 70W; DC 7.4V From Battery		
Trade Name:		Serial No.:	-----
Date of Receipt:	Jun. 18, 2021	Date of Test:	Jun.18~Sep. 08, 2021
Test Specification:	FCC Part 15 Subpart E 15.407 ANSI C63.10:2013 FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01 FCC KDB 662911 D01 Multiple Transmitter Output v02r01		
Test Result:	The device described above is tested by EST Technology Co., Ltd. The measurement results were contained in this test report and EST Technology Co., Ltd. was assumed full responsibility for the accuracy and completeness of these measurements. Also, this report shows that the EUT to be technically compliance with the FCC Rules and Regulations Part 15 Subpart E requirements. This report applies to above tested sample only and shall not be reproduced in part without written approval of EST Technology Co., Ltd. Date: Sep. 13, 2021		
Prepared by:	Reviewed by:		
 Ring Yang / Assistant	 Seven Wang / Engineer	  Iceman Hu / Manager	
Other Aspects:	None.		
Abbreviations: OK/P=passed fail/F=failed n.a/N=not applicable E.U.T=equipment under tested			
This test report is based on a single evaluation of one sample of above mentioned products ,It is not permitted to be duplicated in extracts without written approval of EST Technology Co., Ltd.			

1. GENERAL INFORMATION

1.1. Description of Device (EUT)

FCC ID	:	2AGNC-A15	
Product Name	:	MULTICONNECTED WIRELESS LOUDSPEAKER	
Model Number	:	A15	
Software Version	:	TR 2	
Hardware Version	:	V1.2	
Operation frequency	:	U-NII-1: 5150 MHz~5250 MHz U-NII-3: 5725 MHz~5850 MHz	
Number of channel	:	U-NII-1: IEEE 802.11a / n HT20 / ac VHT20: 4 Channels; IEEE 802.11n HT40 / ac VHT40: 2 Channels; IEEE 802.11ac VHT80: 1 Channel. U-NII-3: IEEE 802.11a / n HT20 / ac VHT20: 5 Channels; IEEE 802.11n HT40 / ac VHT40: 2 Channels; IEEE 802.11ac VHT80: 1 Channel.	
Modulation	:	OFDM(QPSK, BPSK, 16-QAM, 64-QAM,256-QAM)	
Transmit Data Rate	:	IEEE 802.11a: 54, 48, 36, 24, 18, 12, 9, 6Mbps; IEEE 802.11n: up 300Mbps; IEEE 802.11ac: up to 866.6Mbps;	
Channels Spacing	:	IEEE 802.11a: 20MHz; IEEE 802.11n HT20: 20MHz; IEEE 802.11n HT40: 40MHz; IEEE 802.11ac VHT20: 20MHz; IEEE 802.11ac VHT40: 40MHz; IEEE 802.11ac VHT80: 80MHz;	
Transmit Power	:	U-NII-1	IEEE 802.11a: 15.81dBm IEEE 802.11n HT20: 17.57dBm IEEE 802.11n HT40: 18.69dBm IEEE 802.11ac VHT20: 18.52dBm IEEE 802.11ac VHT40: 19.61dBm IEEE 802.11ac VHT80: 17.88dBm
		U-NII-3	IEEE 802.11a: 14.82dBm IEEE 802.11n HT20: 17.38dBm IEEE 802.11n HT40: 19.65dBm IEEE 802.11ac VHT20: 17.30dBm IEEE 802.11ac VHT40: 19.61dBm IEEE 802.11ac VHT80: 19.18dBm
Sample Type	:	Prototype production	

Note:

For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.

1.2. The antenna information for EUT

Ant No.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)
1	-	-	Internal antenna	-	2
2	-	-	Internal antenna	-	2

Remark:

- (1) The EUT can work as CDD mode in IEEE 802.11n and IEEE 802.11ac, and can operate with one spatial stream.

According to KDB 662911 F 2) f) (i):

$$\text{Directional gain} = 2\text{dBi} + 10 \times \log(2/1)\text{dB} = 5.01\text{dBi} < 6\text{dBi}$$

So, the output power limit and power spectral density do not need to be reduced.

- (2) After pre-test all antenna configurations, the worst case configuration is listed below.

TX Mode \ ANT No.	SISO Configuration	MIMO Configuration
IEEE 802.11a	ANT 1 and Ant 2	/
IEEE 802.11n HT20	/	ANT1+ANT2
IEEE 802.11n HT40	/	ANT1+ANT2
IEEE 802.11ac VHT20	/	ANT1+ANT2
IEEE 802.11ac VHT40	/	ANT1+ANT2
IEEE 802.11ac VHT80	/	ANT1+ANT2

2. SUMMARY OF TEST

2.1. Summary of test result

Report Section	Description of Test Item	FCC Standard Section	Results
3	6dB Bandwidth & 26dB Bandwidth & 99% Occupied Bandwidth	15.407(a) 15.407(e)	PASS
4	Maximum Conducted Output Power	15.407(a)	PASS
5	Peak Power Spectral Density	15.407(a)	PASS
6	Unwanted Emissions and Band Edge	15.205 15.209 15.407(b)	PASS
7	Frequency Stability	15.407(g)	PASS
8	AC Power Line Conducted Emissions	15.207 15.407(b)(9)	PASS
9	Antenna Requirement	15.203	PASS

Note:

(1) "N/A" denotes test is not applicable in this test report

2.2. Test Facilities

EMC Lab

: Certificated by CNAS, CHINA
Registration No.: L5288
This Certificate is valid until: November 12, 2023

Certificated by FCC, USA
Designation Number: CN1215
This Certificate is valid until: January 31, 2022

Certificated by A2LA, USA
Registration No.: 4366.01
This Certificate is valid until: January 31, 2022

Certificated by Industry Canada
CAB identifier No.: CN0035
This Certificate is valid until: January 31, 2022

Certificated by VCCI, Japan
Registration No.: C-14103; T-20073; R-13663;
R-20103; G-20097
Date of registration: Apr. 20, 2020
This Certificate is valid until: Apr. 19, 2023

Certificated by TUV Rheinland, Germany
Registration No.: UA 50413872 0001
Date of registration: July 31, 2018

Certificated by Intertek
Registration No.: 2011-RTL-L2-64
Date of registration: November 08, 2018

Name of Firm : EST Technology Co., Ltd.

Site Location : Chilingxiang, Qishantou, Santun, Houjie, Dongguan, Guangdong, China

2.3. Measurement uncertainty for EST Technology Co., Ltd.

Test Item	Uncertainty
Uncertainty for Conduction emission test	2.54dB
Uncertainty for Radiation Emission test (30MHz-1GHz)	3.62
Uncertainty for Radiation Emission test (1GHz to 18GHz)	4.86
Uncertainty for spurious emissions test (18GHz to 40GHz)	4.67
Uncertainty for radio frequency	7×10^{-8}
Uncertainty for conducted RF Power	1.08dB
Uncertainty for Power density test	0.26dB
Temperature	$\pm 0.6^{\circ}\text{C}$
Humidity	$\pm 4.0\%$
Volatage DC	$\pm 1.0\%$
Volatage (AC, <10KHz)	$\pm 1.5\%$

Note:

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.


2.4. Assistant equipment used for test

Item	Equipment	Brand	Model Name/Type No.	FCC ID	Series No.
-	-	-	-	-	-

Item	Shielded Type	Ferrite Core	Length	Note
1	NO	NO	1.8m	AC Cable

2.5. Block Diagram

For radiated emissions test: EUT was placed on a turn table, which is 0.8 (or 1.5) meter high above ground.



(EUT: MULTICONNECTED WIRELESS LOUDSPEAKER)

2.6. Test Mode

Pre-scan has been combined all possible modulations and data rates to determine the worst case test mode, the worst case test mode was selected for the final test as listed below.

Test Item	Test Mode	Channel	Modulation	Data rate
6dB Bandwidth	IEEE 802.11a	149/157/165	OFDM	6Mbps
	IEEE 802.11n HT20	149/157/165	OFDM	MCS0
	IEEE 802.11n HT40	151/159	OFDM	MCS0
	IEEE 802.11ac VHT20	149/157/165	OFDM	MCS0
	IEEE 802.11ac VHT40	151/159	OFDM	MCS0
	IEEE 802.11ac VHT80	155	OFDM	MCS0
26dB Bandwidth	IEEE 802.11a	36/40/48	OFDM	6Mbps
	IEEE 802.11n HT20	36/40/48	OFDM	MCS0
	IEEE 802.11n HT40	38/46	OFDM	MCS0
	IEEE 802.11ac VHT20	36/40/48	OFDM	MCS0
	IEEE 802.11ac VHT40	38/46	OFDM	MCS0
	IEEE 802.11ac VHT80	42	OFDM	MCS0
99% Occupied Bandwidth	IEEE 802.11a	36/40/48/149/157/165	OFDM	6Mbps
	IEEE 802.11n HT20	36/40/48/149/157/165	OFDM	MCS0
	IEEE 802.11n HT40	38/46/151/159	OFDM	MCS0
	IEEE 802.11ac VHT20	36/40/48/149/157/165	OFDM	MCS0
	IEEE 802.11ac VHT40	38/46/151/159	OFDM	MCS0
	IEEE 802.11ac VHT80	42/155	OFDM	MCS0
Maximum Conducted Output Power	IEEE 802.11a	36/40/48/149/157/165	OFDM	6Mbps
	IEEE 802.11n HT20	36/40/48/149/157/165	OFDM	MCS0
	IEEE 802.11n HT40	38/46/151/159	OFDM	MCS0
	IEEE 802.11ac VHT20	36/40/48/149/157/165	OFDM	MCS0
	IEEE 802.11ac VHT40	38/46/151/159	OFDM	MCS0
	IEEE 802.11ac VHT80	42/155	OFDM	MCS0

Peak Power Spectral Density	IEEE 802.11a	36/40/48/149/157/165	OFDM	6Mbps
	IEEE 802.11n HT20	36/40/48/149/157/165	OFDM	MCS0
	IEEE 802.11n HT40	38/46/151/159	OFDM	MCS0
	IEEE 802.11ac VHT20	36/40/48/149/157/165	OFDM	MCS0
	IEEE 802.11ac VHT40	38/46/151/159	OFDM	MCS0
	IEEE 802.11ac VHT80	42/155	OFDM	MCS0
Unwanted Emissions and Band Edge(Above 1GHz)	IEEE 802.11a	36/40/48/149/157/165	OFDM	6Mbps
	IEEE 802.11n HT20	36/40/48/149/157/165	OFDM	MCS0
	IEEE 802.11n HT40	38/46/151/159	OFDM	MCS0
	IEEE 802.11ac VHT20	36/40/48/149/157/165	OFDM	MCS0
	IEEE 802.11ac VHT40	38/46/151/159	OFDM	MCS0
	IEEE 802.11ac VHT80	42/155	OFDM	MCS0
Unwanted Emissions Below 1GHz	IEEE 802.11a	36	OFDM	6Mbps
Frequency Stability	Unmodulation	36/149	N/A	N/A
AC Power Line Conducted Emissions	IEEE 802.11a	36	OFDM	6Mbps

Note:

1. In radiated measurement, the EUT had been pre-scan on the positioned of each 3 axis(X,Y,Z), the worst case was found when positioned on **X-plane**.

2.7. Channel List

Band	Mode	Channel	Frequency (MHz)
U-NII-1	IEEE 802.11a & n HT20 & ac VHT20	36	5180
		40	5200
		44	5220
		48	5240
	IEEE 802.11n HT40 & ac VHT40	38	5190
		46	5230
	IEEE 802.11ac VHT80	42	5210
U-NII-3	IEEE 802.11a & n HT20 & ac VHT20	149	5745
		153	5765
		157	5785
		161	5805
		165	5825
	IEEE 802.11n HT40 & ac VHT40	151	5755
		159	5795
	IEEE 802.11ac VHT80	155	5775

2.8. Power Setting of Test Software

Software Name	ADB		
U-NII-1			
Frequency(MHz)	5180	5200	5240
IEEE 802.11a Setting	21	21	21
IEEE 802.11n HT20 Setting	21	21	21
IEEE 802.11ac VHT20 Setting	21	21	21
Frequency(MHz)	5190	5230	
IEEE 802.11n HT40 Setting	19	19	
IEEE 802.11ac VHT40 Setting	19	19	
Frequency(MHz)	5210		
IEEE 802.11ac VHT80 Setting	22		
U-NII-3			
Frequency(MHz)	5745	5785	5825
IEEE 802.11a Setting	21	21	21
IEEE 802.11n HT20 Setting	21	21	21
IEEE 802.11ac VHT20 Setting	21	21	21
Frequency(MHz)	5755	5795	
IEEE 802.11n HT40 Setting	19	19	
IEEE 802.11ac VHT40 Setting	19	19	
Frequency(MHz)	5775		
IEEE 802.11ac VHT80 Setting	22		


2.9. Duty Cycle of Test Signal

Temperature	24℃	Relative Humidity		55%	Test Voltage		AC 120V/60Hz
Mode	Frequency (MHz)	On time (ms)	Total Time (ms)	Duty Cycle (%)	Duty Factor (dB)	1/T (Hz)	VBW Setting (dB)
IEEE 802.11a	5180	1.42754	1.50725	94.71	0.24	701	701
IEEE 802.11n HT20	5180	1.32609	1.40580	94.33	0.25	754	754
IEEE 802.11ac VHT20	5190	1.33333	1.42029	93.88	0.27	750	750
IEEE 802.11n HT40	5180	0.66087	0.74783	88.37	0.54	1513	1513
IEEE 802.11ac VHT40	5190	0.67826	0.75942	89.31	0.49	1474	1474
IEEE 802.11ac VHT80	5210	0.33913	0.42609	79.59	0.99	2949	2949


Note:

1. Duty Cycle=On Time/Total Time×100%.
2. Duty Factor=10×Log(1/Duty Cycle).
3. If duty cycle <98 %, the conducted average output power and average power spectral density should be add duty factor.
4. If duty cycle ≥98 %,the EUT is consider to be transmitting continuously,the conducted average output power and average power spectral density no need to add duty factor.
5. The on-time time is transmission duration(T).
6. The VBW Setting is use for RMS measurement in unwanted emissions and band edge(Above 1GHz) test.

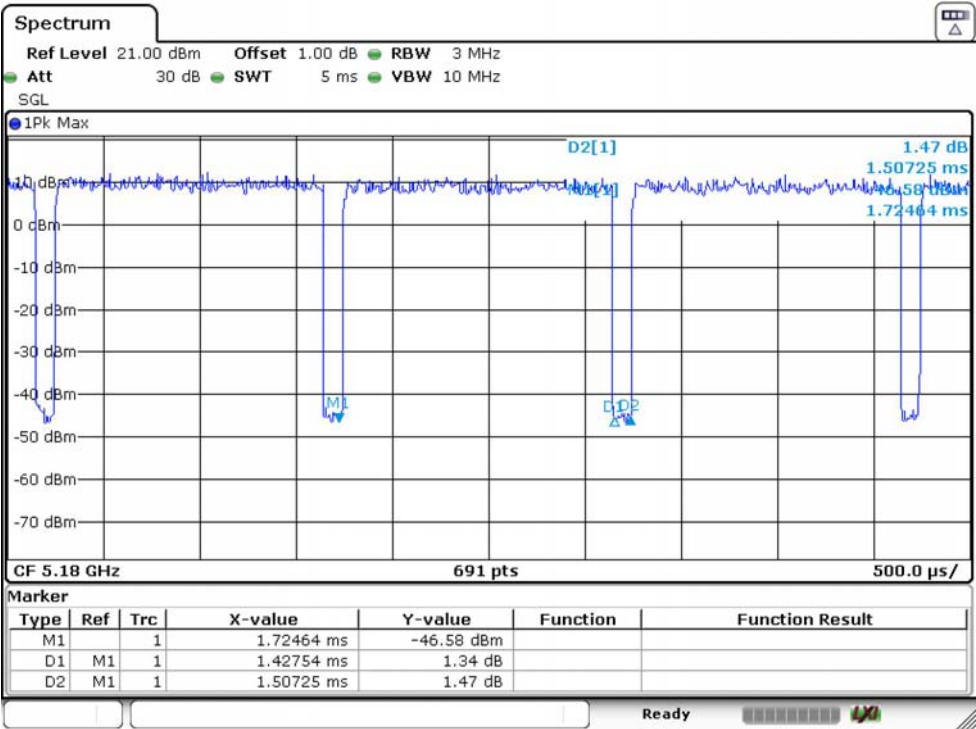
IEEE 802.11a 5180MHz




IEEE 802.11n HT20 5180MHz

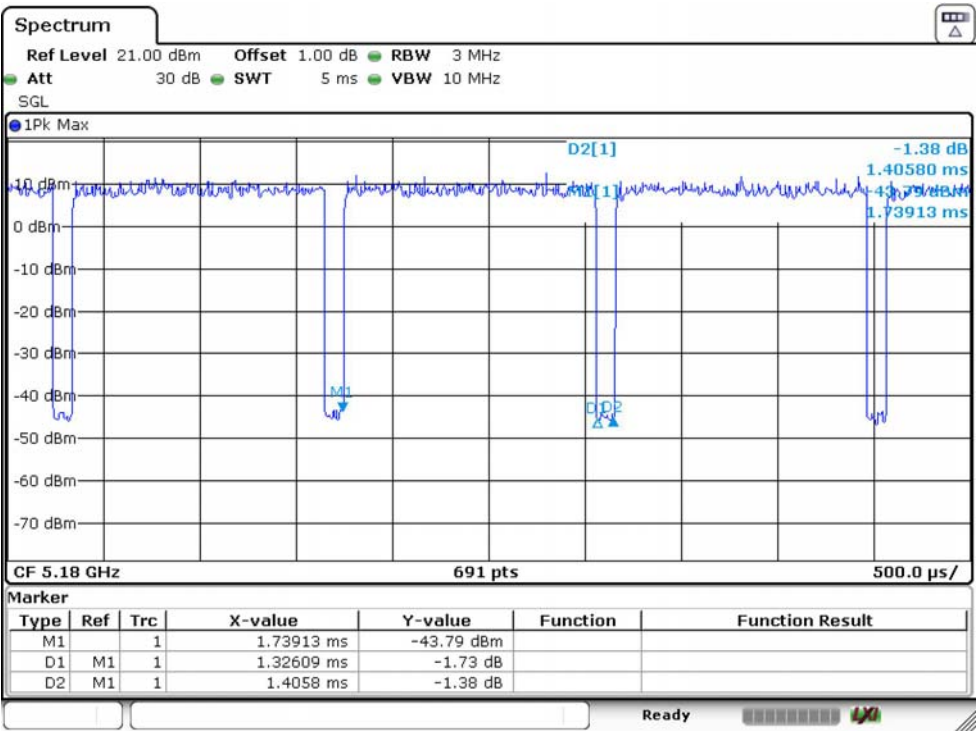


IEEE 802.11n HT40 5190MHz

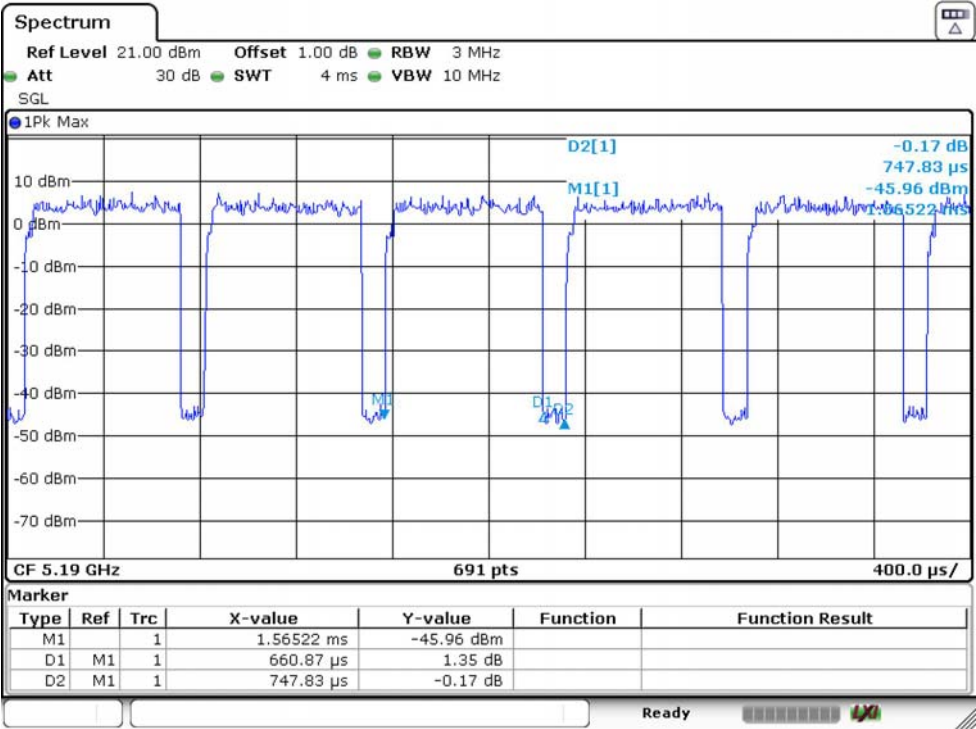


IEEE 802.11ac VHT20 5180MHz

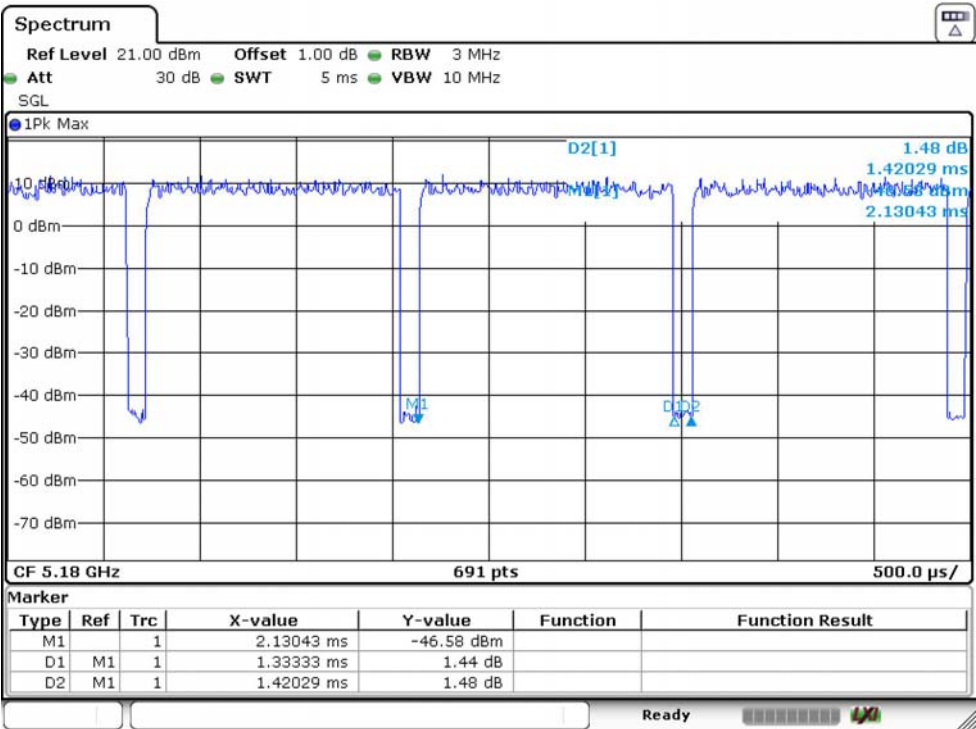

IEEE 802.11ac VHT40 5190MHz

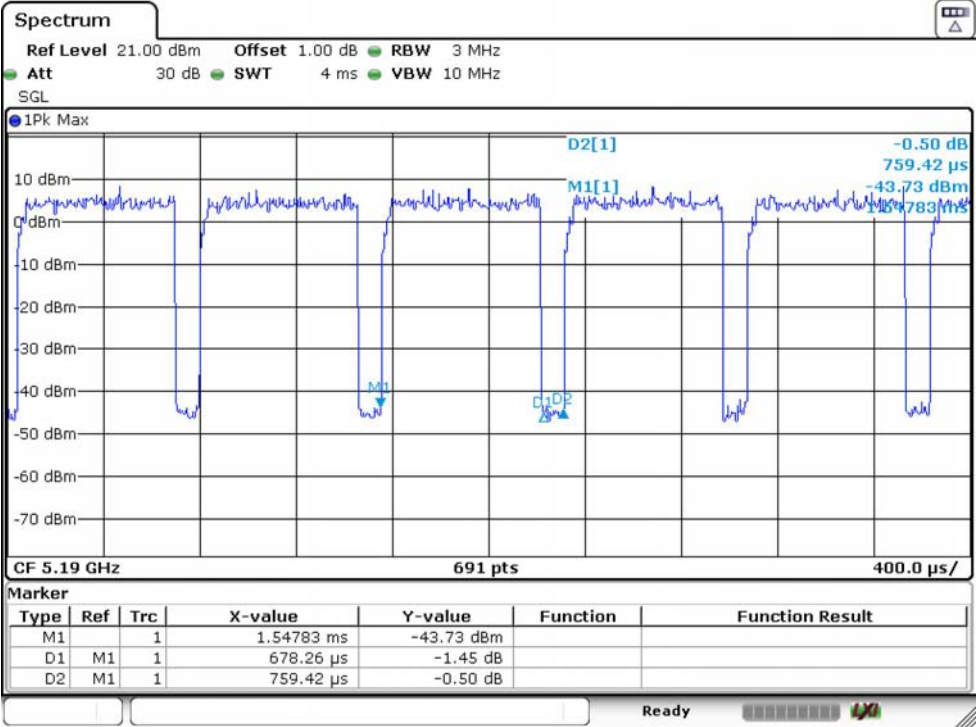

IEEE 802.11ac VHT80 5210MHz

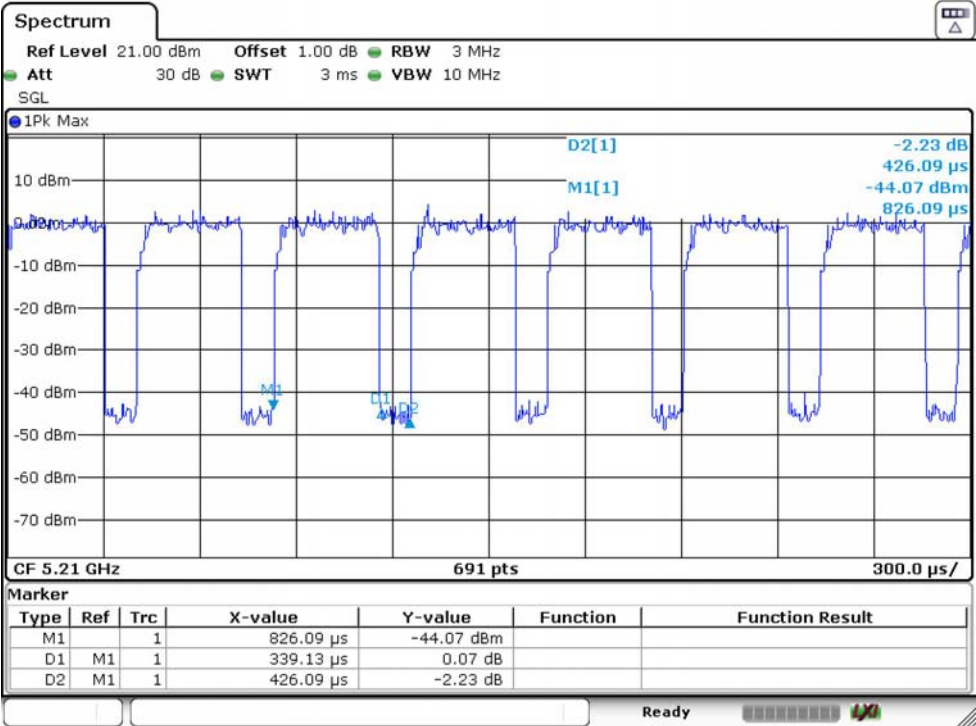

2.10. Test Equipment List

For AC power conducted emissions test						
Equipment	Manufacturer	Model No.	Serial No.	Calibration Body	Last Cal.	Next Cal.
EMI Test Receiver	Rohde & Schwarz	ESHS30	EST-E001	LISAI	June 13,21	1 Year
Artificial Mains Network	Rohde & Schwarz	ENV216	EST-E002	LISAI	June 13,21	1 Year
Pulse Limiter	Rohde & Schwarz	ESH3-Z2	EST-E078	LISAI	June 13,21	1 Year
Test Software	Audix	e3-6.111221a	N/A	N/A	N/A	N/A

For radiated emissions test(9KHz-30MHz)						
Equipment	Manufacturer	Model No.	Serial No.	Calibration Body	Last Cal.	Next Cal.
EMI Test Receiver	Rohde & Schwarz	ESR7	EST-E047	LISAI	June 13,21	1 Year
Active Loop Antenna	SCHWARZB ECK	FMZB 1519B	EST-E054	LISAI	June 13,21	1 Year
Test Software	Audix	e3-6.111221a	N/A	N/A	N/A	N/A
9kHz-30MHz Cable	N/A	EST-001	N/A	N/A	N/A	N/A

For radiated emissions test(30MHz-1000MHz)						
Equipment	Manufacturer	Model No.	Serial No.	Calibration Body	Last Cal.	Next Cal.
EMI Test Receiver	Rohde & Schwarz	ESR7	EST-E047	LISAI	June 13,21	1 Year
Bilog Antenna	Teseq	CBL 6111D	EST-E034	LISAI	June 13,21	1 Year
Test Software	Audix	e3-6.111221a	N/A	N/A	N/A	N/A
30-1000MHz Cable	N/A	EST-002	N/A	N/A	N/A	N/A

For radiated emissions test(Above 1000MHz)						
Equipment	Manufacturer	Model No.	Serial No.	Calibration Body	Last Cal.	Next Cal.
Horn Antenna	SCHWARZB ECK	BBHA 9120 D	EST-E031	LISAI	June 13,21	1 Year
Horn Antenna	SCHWARZB ECK	BBHA9170	N/A	LISAI	June 13,21	1 Year
Signal Amplifier	SCHWARZB ECK	BBV9718	EST-E032	LISAI	June 13,21	1 Year
Spectrum Analyzer	Rohde & Schwarz	FSV40	EST-E069	LISAI	July 19,21	1 Year
Test Software	Audix	e3-6.111221a	N/A	N/A	N/A	N/A
Above 1GHz Cable	N/A	EST-003	N/A	N/A	N/A	N/A


For connect EUT antenna terminal test						
Equipment	Manufacturer	Model No.	Serial No.	Calibration Body	Last Cal.	Next Cal.
TS 8997	Rohde & Schwarz	/	/	/	/	/
Open Switch and Control Unit	Rohde & Schwarz	OSP-B157WB	EST-E036	LISAI	June 13,21	1 Year
Signal and Spectrum Analyzer	Rohde & Schwarz	FSV	EST-E037	LISAI	June 13,21	1 Year
Signal Generator	Rohde & Schwarz	SMB100A	EST-E038	LISAI	June 13,21	1 Year
Vector Signal Generator	Rohde & Schwarz	SMBV100A	EST-E039	LISAI	June 13,21	1 Year
Test Software	Rohde & Schwarz	WMS32	V10.50.00	N/A	N/A	N/A
Temperature controller	Terchy	MHQ	EST-E101	LISAI	June 13,21	1 Year

3. 6dB BANDWIDTH & 26dB BANDWIDTH & 99% OCCUPIED BANDWIDTH

3.1. Limit

Band	Frequency (MHz)	Test Item	Limit
U-NII-1	5150-5250	26dB Bandwidth&99% Occupied Bandwidth	N/A
U-NII-2A	5250-5350	26dB Bandwidth&99% Occupied Bandwidth	N/A
U-NII-2C	5470-5725	26dB Bandwidth&99% Occupied Bandwidth	N/A
U-NII-3	5725-5850	6dB Bandwidth&99% Occupied Bandwidth	6dB Bandwidth $\geq$ 500KHz

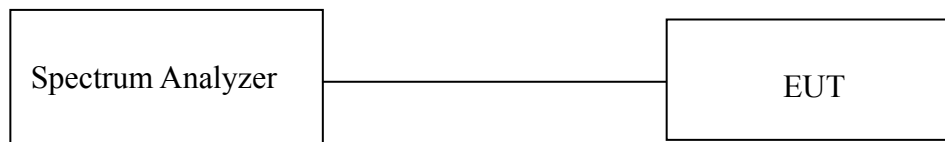3.2. Test Setup



3.3. Spectrum Analyzer Setting

6dB Bandwidth	
Spectrum Parameters	Setting
RBW	100KHz
VBW	300KHz
Span	40MHz(20MHz Bandwidth mode) 60MHz(40MHz Bandwidth mode) 120MHz(80MHz Bandwidth mode)
Sweep Time	Auto
Detector	Peak
Trace Mode	Max Hold

26dB Bandwidth	
Spectrum Parameters	Setting
RBW	approximately 1% of the emission bandwidth
VBW	>RBW
Span	40MHz(20MHz Bandwidth mode) 60MHz(40MHz Bandwidth mode) 120MHz(80MHz Bandwidth mode)
Sweep Time	Auto
Detector	Peak
Trace Mode	Max Hold

99% Occupied Bandwidth	
Spectrum Parameters	Setting
RBW	1% to 5% of the OBW
VBW	approximately three times the RBW
Span	between 1.5 times and 5.0 times the OBW
Sweep Time	Auto
Detector	Peak
Trace Mode	Max Hold

3.4. Test Procedure

For 26dB Bandwidth Measurement :

- Connect EUT antenna terminal to the spectrum analyzer with RF cable.
- Spectrum analyzer setting parameters in accordance with section 3.3.
- Set the EUT transmit continuously with maximum output power.
- Allow trace to stabilize, measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the instrument. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.
- Repeat above procedures until all modes and channels were measured.
- Record the results in the test report.

For 6dB Bandwidth Measurement :

- Connect EUT antenna terminal to the spectrum analyzer with RF cable.
- Spectrum analyzer setting parameters in accordance with section 3.3.
- Set the EUT transmit continuously with maximum output power.
- Allow trace to stabilize, measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.
- Repeat above procedures until all modes and channels were measured.
- Record the results in the test report.

For 99% Occupied Bandwidth Measurement :

- Connect EUT antenna terminal to the spectrum analyzer with RF cable.
- Spectrum analyzer setting parameters in accordance with section 3.3.
- Set the EUT transmit continuously with maximum output power.
- Allow trace to stabilize, use the 99% power bandwidth function to measure bandwidth.
- Repeat above procedures until all modes and channels were measured.
- Record the results in the test report.

3.5. Test Result

Temperature	24℃	Relative Humidity			55%	Test Voltage		AC 120V/60Hz
26dB Bandwidth&99% Occupied Bandwidth								
AND	Test Mode	Fre (MHz)	26dB Bandwidth (MHz)		99% Occupied Bandwidth (MHz)		Calcul ate Power Limit (W)	Calculate Power Limit (dBm)
			Ant 1	Ant 2	Ant 1	Ant 2		
U-NII-1	IEEE 802.11a	5180	21.650	21.592	16.961	17.077		
		5200	21.592	21.360	16.729	16.961		
		5240	21.360	21.592	16.845	16.845		
	IEEE 802.11n HT20	5180	21.476	21.823	18.061	18.119		
		5200	21.476	21.360	17.887	17.829		
		5240	21.302	21.476	17.945	17.829		
	IEEE 802.11ac VHT20	5180	21.766	21.766	17.887	18.002		
		5200	21.766	21.823	18.061	18.061		
		5240	21.708	21.592	17.945	18.061		
	IEEE 802.11n HT40	5190	39.942	39.855	36.585	36.469		
		5230	39.682	39.855	36.353	36.585		
	IEEE 802.11ac VHT40	5190	40.029	40.029	36.237	36.353		
		5230	39.942	39.942	36.585	36.237		
	IEEE 802.11ac VHT80	5210	80.750	80.930	75.253	75.485		

Temperature	24℃	Relative Humidity			55%	Test Voltage	AC 120V/60Hz	
6dB Bandwidth&99% Occupied Bandwidth								
BAND	Test Mode	Fre (MHz)	6dB Bandwidth (MHz)		99% Occupied Bandwidth (MHz)		6dB BW Min Limit (MHz)	Result
			Ant 1	Ant 2	Ant 1	Ant 2		
U-NII-3	IEEE 802.11a	5745	16.323	16.313	17.019	16.961	0.5	PASS
		5785	16.308	16.328	16.845	16.845	0.5	PASS
		5825	16.313	16.258	16.961	16.787	0.5	PASS
	IEEE 802.11n HT20	5745	17.548	17.563	18.061	17.945	0.5	PASS
		5785	17.538	17.548	18.061	18.061	0.5	PASS
		5825	17.558	17.553	18.119	17.945	0.5	PASS
	IEEE 802.11ac VHT20	5745	17.548	17.568	18.061	18.061	0.5	PASS
		5785	17.563	17.538	18.177	18.061	0.5	PASS
		5825	17.548	17.548	18.061	18.408	0.5	PASS
	IEEE 802.11n HT40	5755	36.251	36.056	36.700	36.353	0.5	PASS
		5795	36.033	36.041	36.353	36.353	0.5	PASS
	IEEE 802.11ac VHT40	5755	36.236	36.251	36.700	36.700	0.5	PASS
		5795	36.026	36.048	36.469	36.585	0.5	PASS
	IEEE 802.11ac VHT80	5775	75.156	75.306	75.485	75.485	0.5	PASS

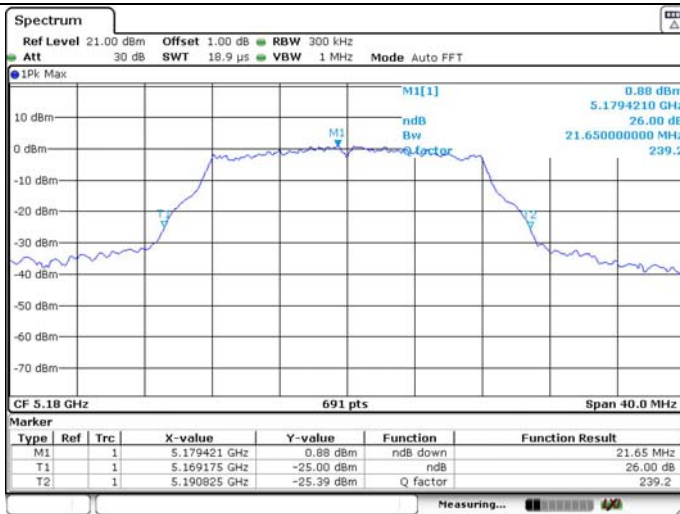
Note :

For Band U-NII-2A and U-NII-2C,the maximum conducted output power limit is 250mw or $11+10 \times \text{Log B}$, which is lesser,where B is the 26dB Bandwidth in MHz.So in this section,the maximum conducted output power limit can calculate with 26dB Bandwidth.

3.6. Test Result

U-NII-1 IEEE 802.11a 5180MHz_Ant 1

26dB Bandwidth




99% Occupied Bandwidth



U-NII-1 IEEE 802.11a 5200MHz_Ant 1

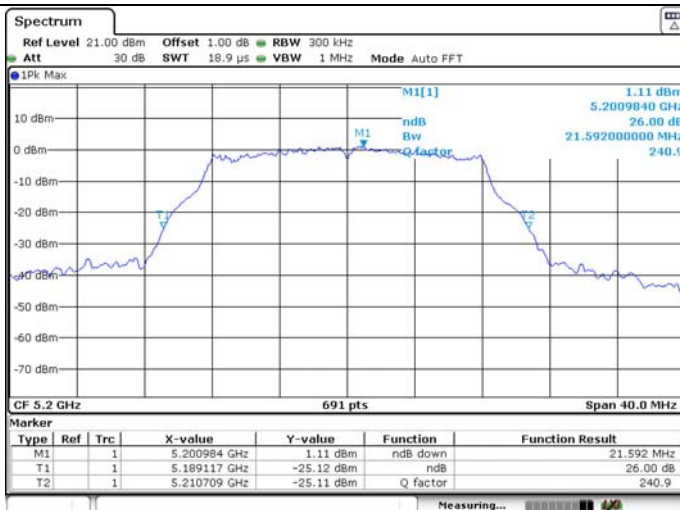26dB Bandwidth




99% Occupied Bandwidth




U-NII-1 IEEE 802.11a 5240MHz_Ant 1

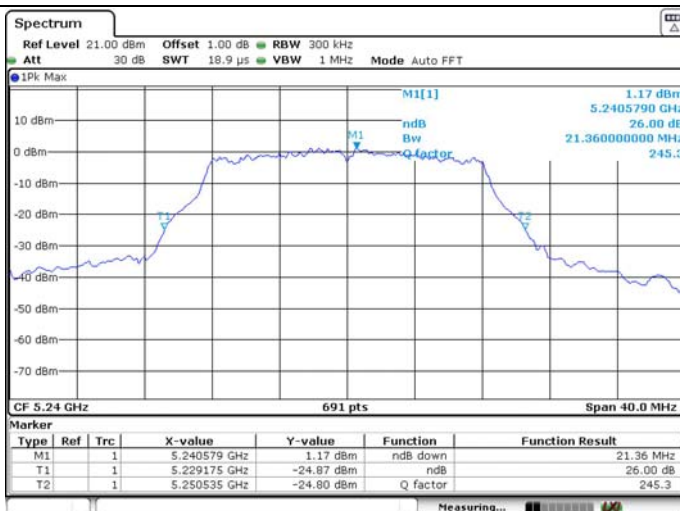26dB Bandwidth




99% Occupied Bandwidth

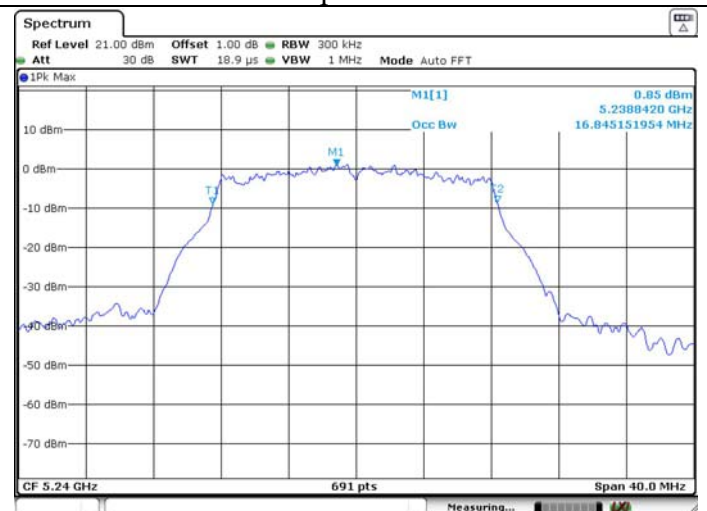

U-NII-1 IEEE 802.11a 5180MHz_Ant 2

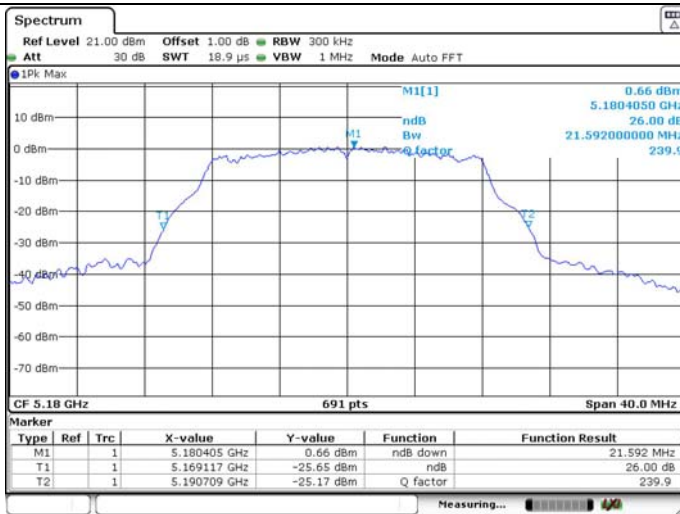26dB Bandwidth




99% Occupied Bandwidth




U-NII-1 IEEE 802.11a 5200MHz_Ant 2

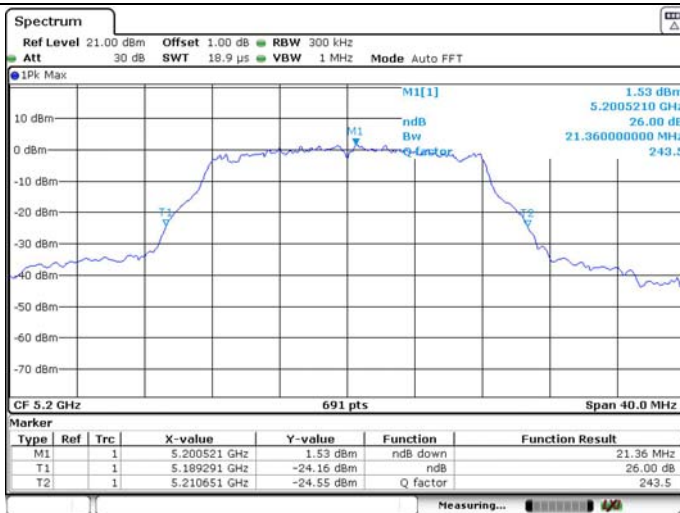26dB Bandwidth




99% Occupied Bandwidth

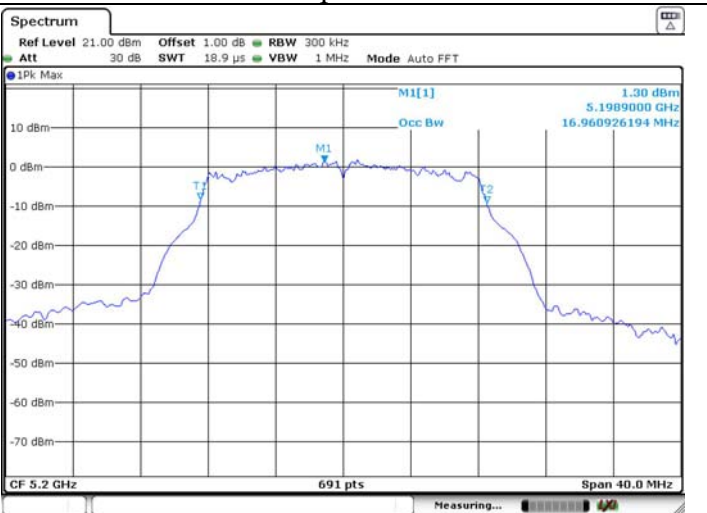



U-NII-1 IEEE 802.11a 5240MHz_Ant 2




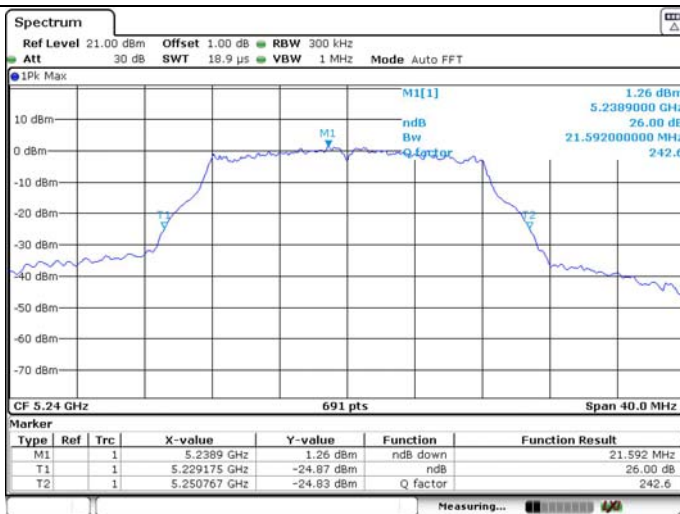
26dB Bandwidth









99% Occupied Bandwidth


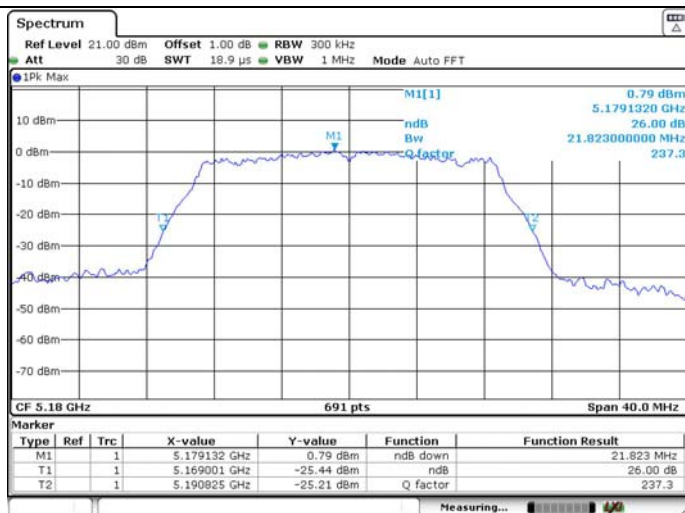
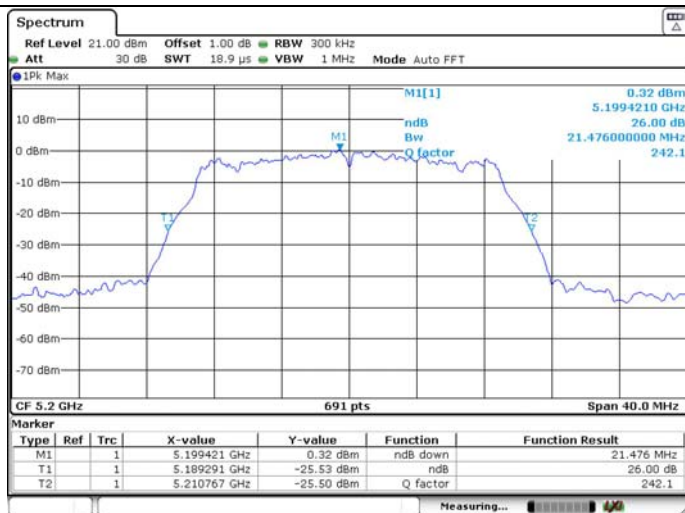


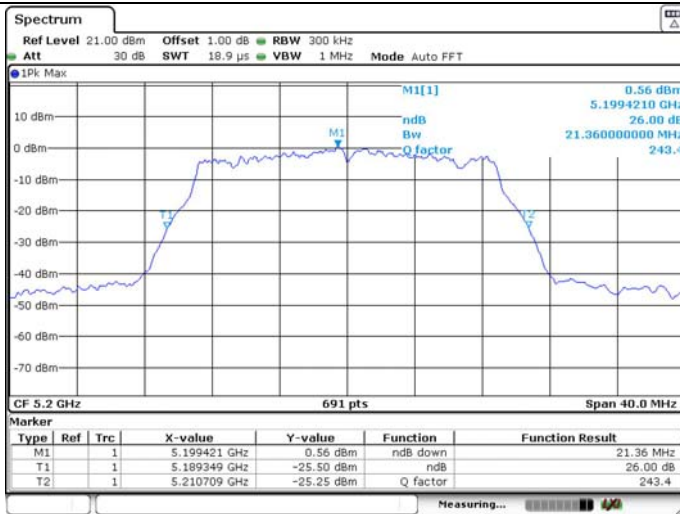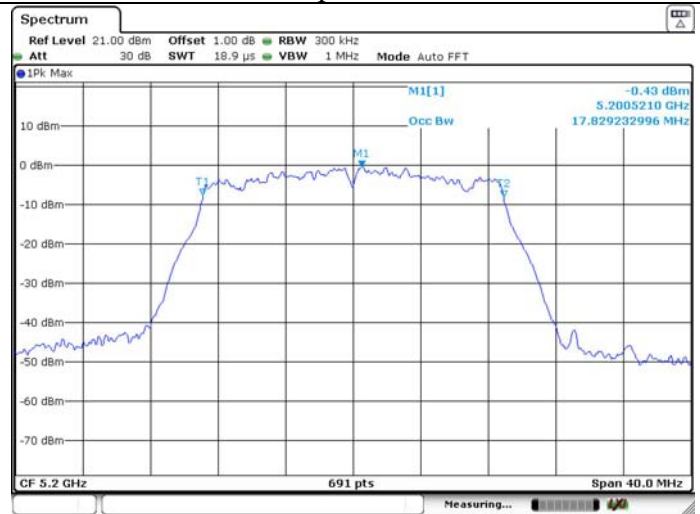
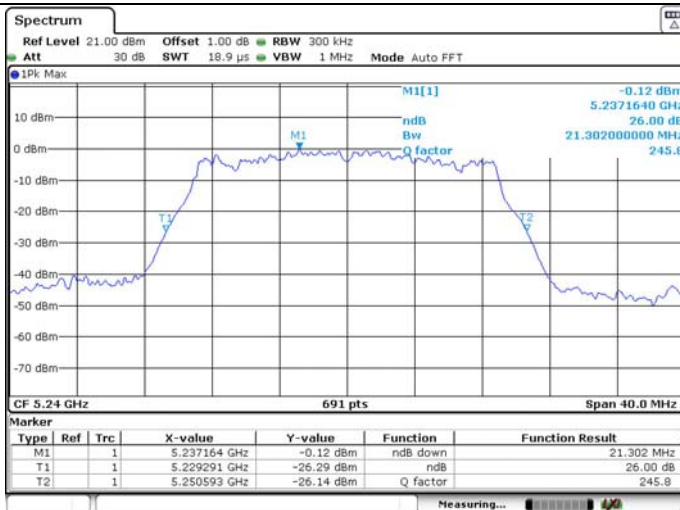
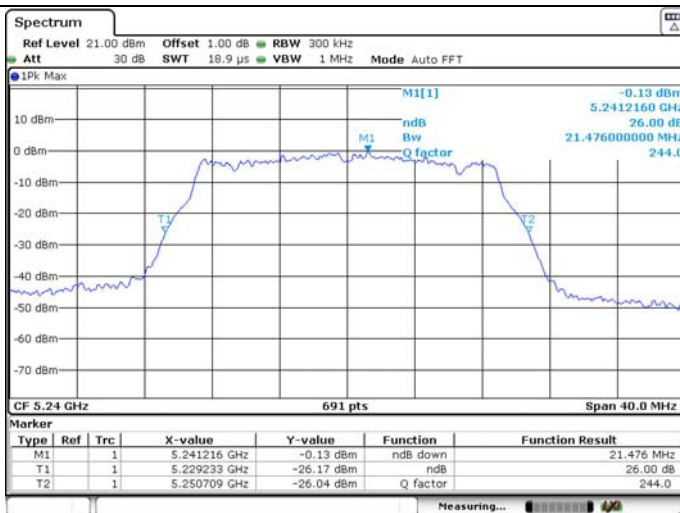
U-NII-1 IEEE 802.11n HT20 5180MHz_Ant 1**26dB Bandwidth****99% Occupied Bandwidth****U-NII-1 IEEE 802.11n HT20 5180MHz_Ant 2****26dB Bandwidth****99% Occupied Bandwidth****U-NII-1 IEEE 802.11n HT20 5200MHz_Ant 1****26dB Bandwidth****99% Occupied Bandwidth**


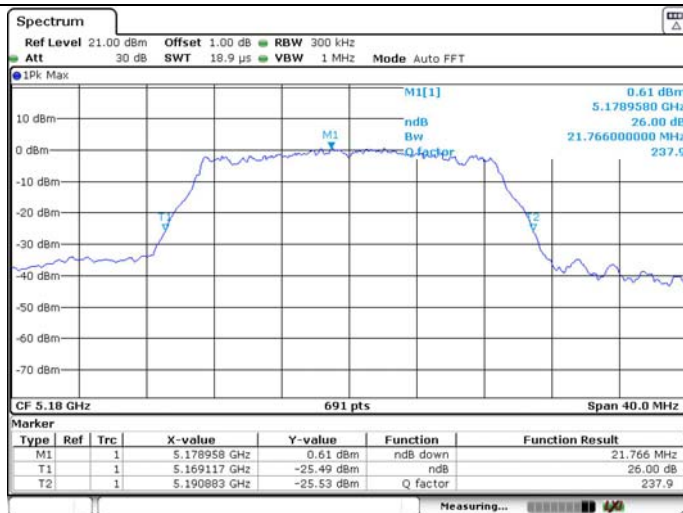
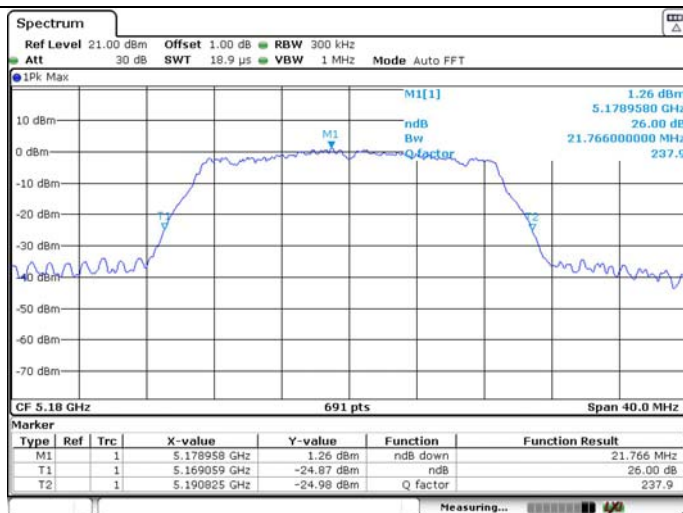
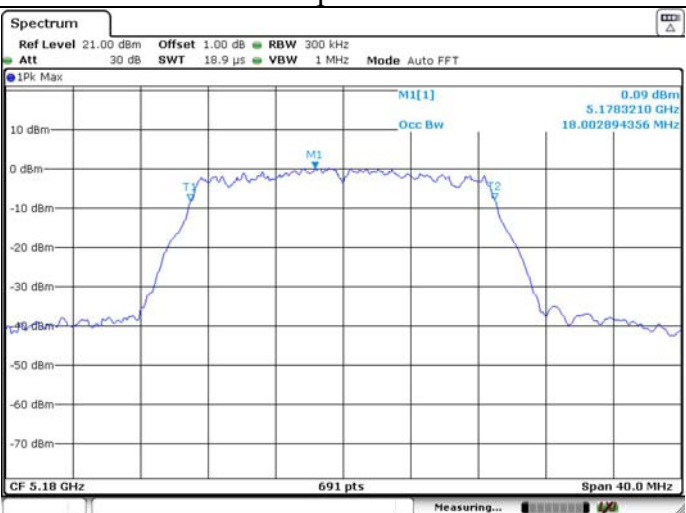
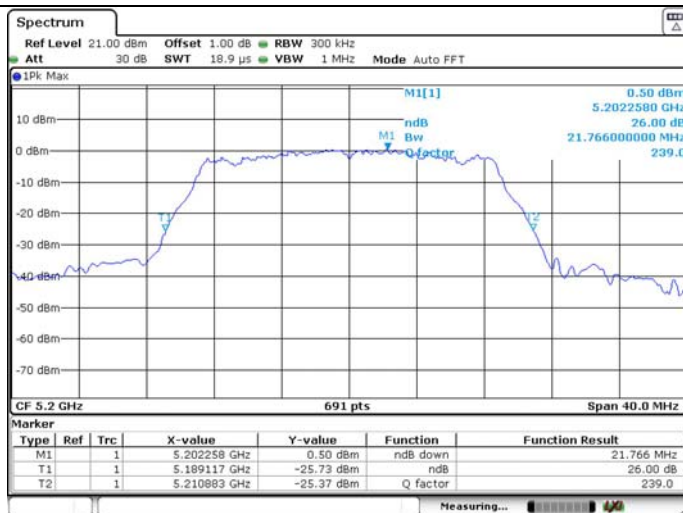
U-NII-1 IEEE 802.11n HT20 5200MHz_Ant 2**26dB Bandwidth****99% Occupied Bandwidth****U-NII-1 IEEE 802.11n HT20 5240MHz_Ant 1****26dB Bandwidth****99% Occupied Bandwidth****U-NII-1 IEEE 802.11n HT20 5240MHz_Ant 2****26dB Bandwidth****99% Occupied Bandwidth**

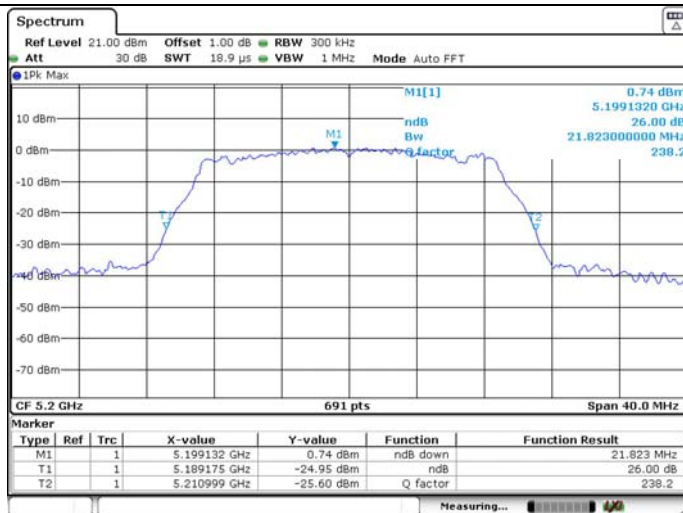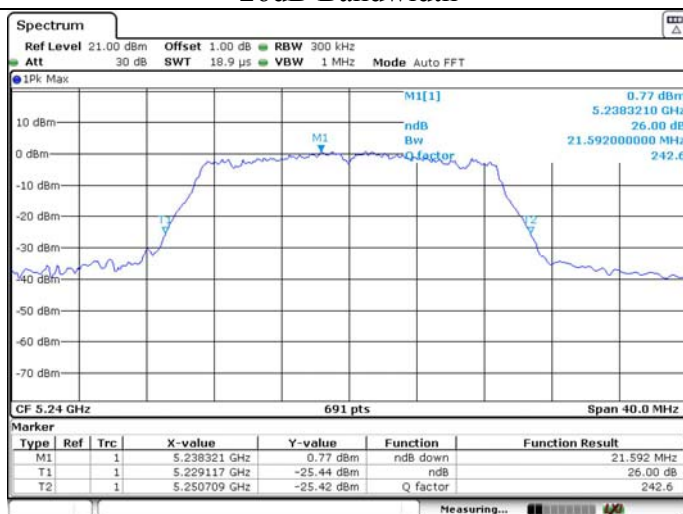
U-NII-1 IEEE 802.11ac VHT20 5180MHz_Ant 1**26dB Bandwidth****99% Occupied Bandwidth****U-NII-1 IEEE 802.11ac VHT20 5180MHz_Ant 2****26dB Bandwidth****99% Occupied Bandwidth****U-NII-1 IEEE 802.11ac VHT20 5200MHz_Ant 1****26dB Bandwidth****99% Occupied Bandwidth**

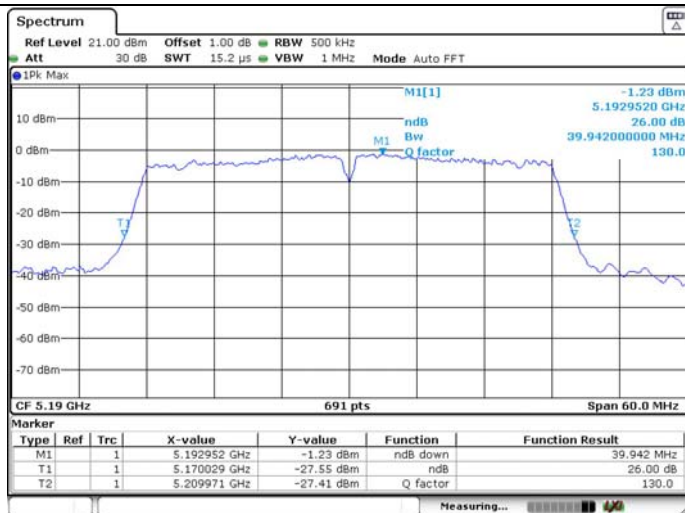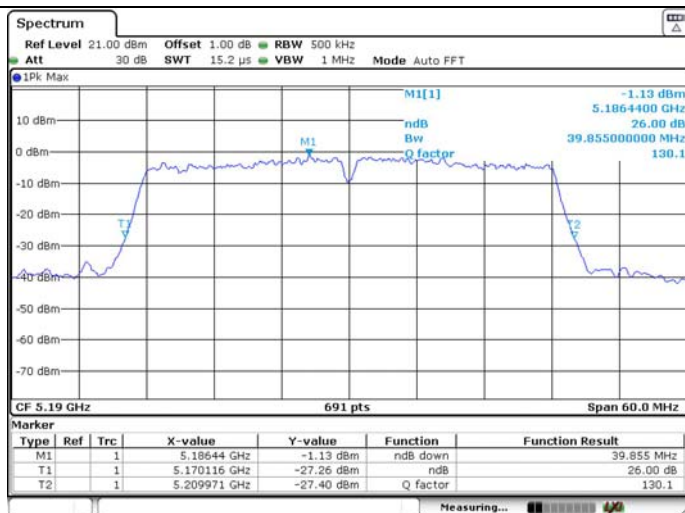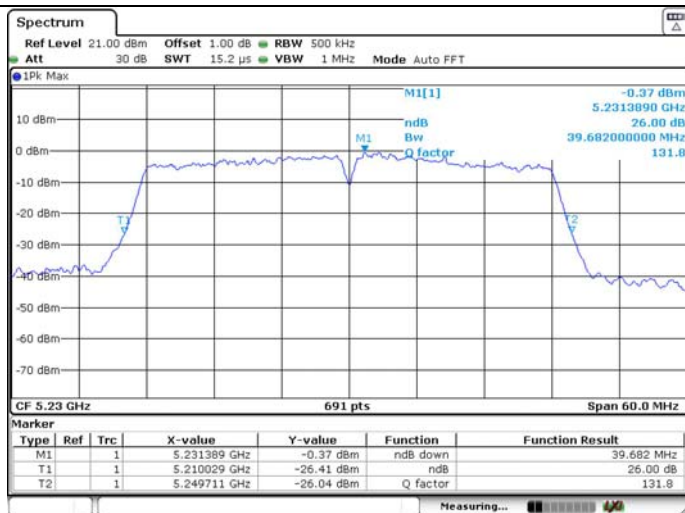U-NII-1 IEEE 802.11ac VHT20 5200MHz_Ant 2**26dB Bandwidth****99% Occupied Bandwidth****U-NII-1 IEEE 802.11ac VHT20 5240MHz_Ant 1****26dB Bandwidth****99% Occupied Bandwidth****U-NII-1 IEEE 802.11ac VHT20 5240MHz_Ant 2****26dB Bandwidth****99% Occupied Bandwidth**

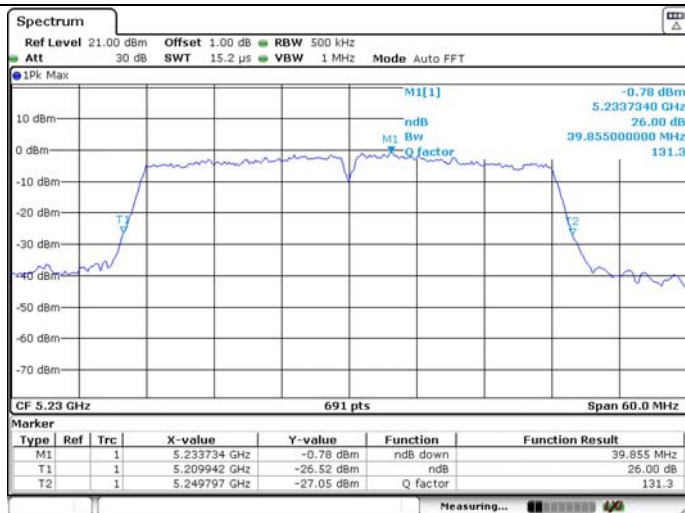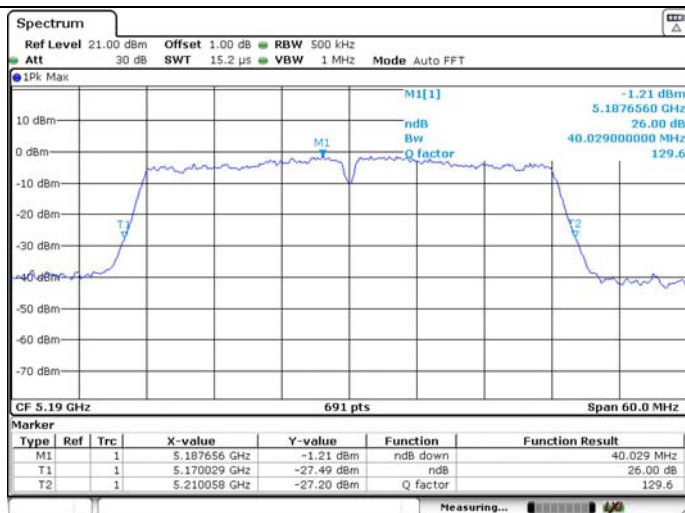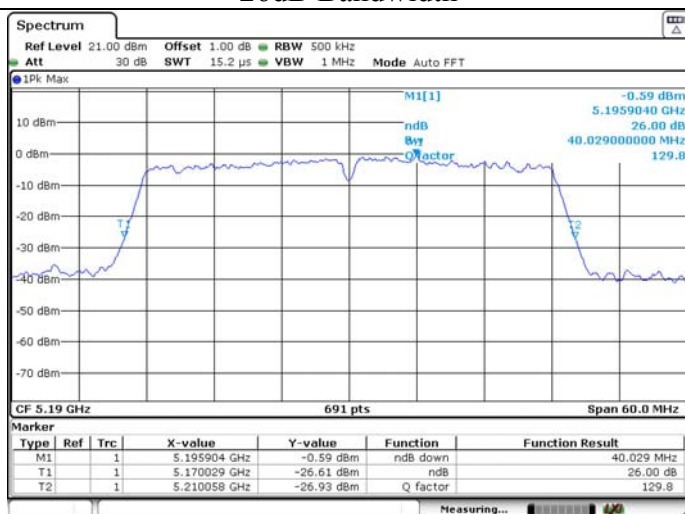U-NII-1 IEEE 802.11n HT40 5190MHz_Ant 1**26dB Bandwidth****99% Occupied Bandwidth****U-NII-1 IEEE 802.11n HT40 5190MHz_Ant 2****26dB Bandwidth****99% Occupied Bandwidth****U-NII-1 IEEE 802.11n HT40 5230MHz_Ant 1****26dB Bandwidth****99% Occupied Bandwidth**

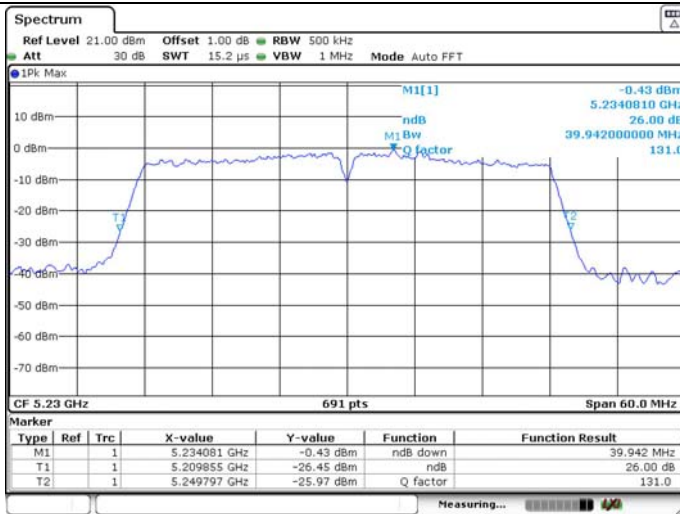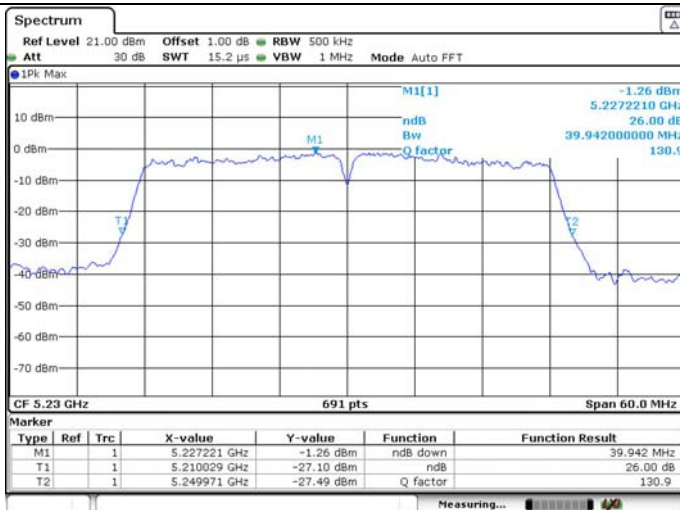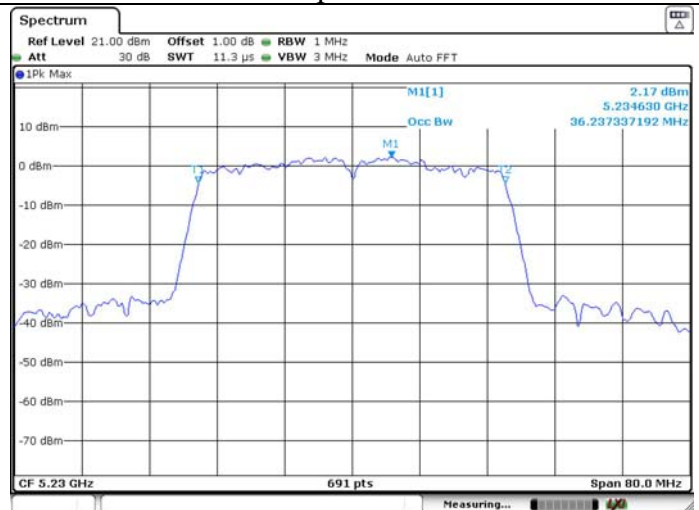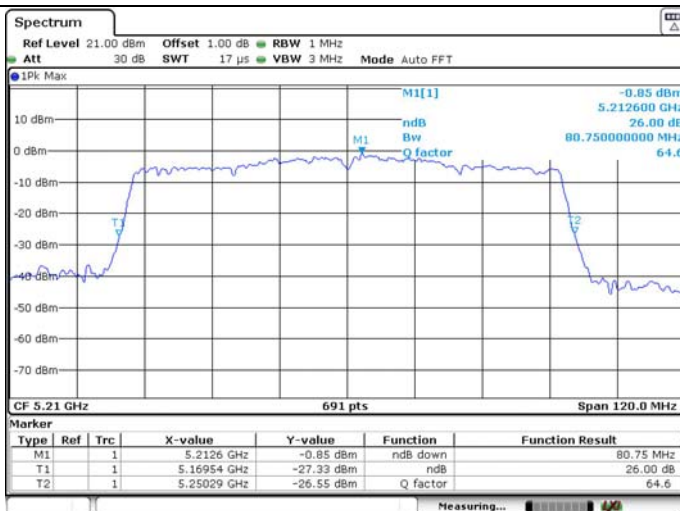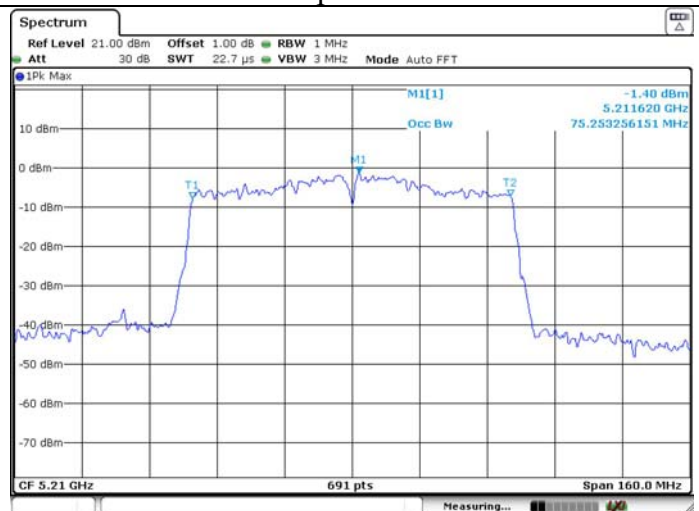
U-NII-1 IEEE 802.11n HT40 5230MHz_Ant 2**26dB Bandwidth****99% Occupied Bandwidth****U-NII-1 IEEE 802.11ac VHT40 5190MHz_Ant 1****26dB Bandwidth****99% Occupied Bandwidth****U-NII-1 IEEE 802.11ac VHT40 5190MHz_Ant 2****26dB Bandwidth****99% Occupied Bandwidth**

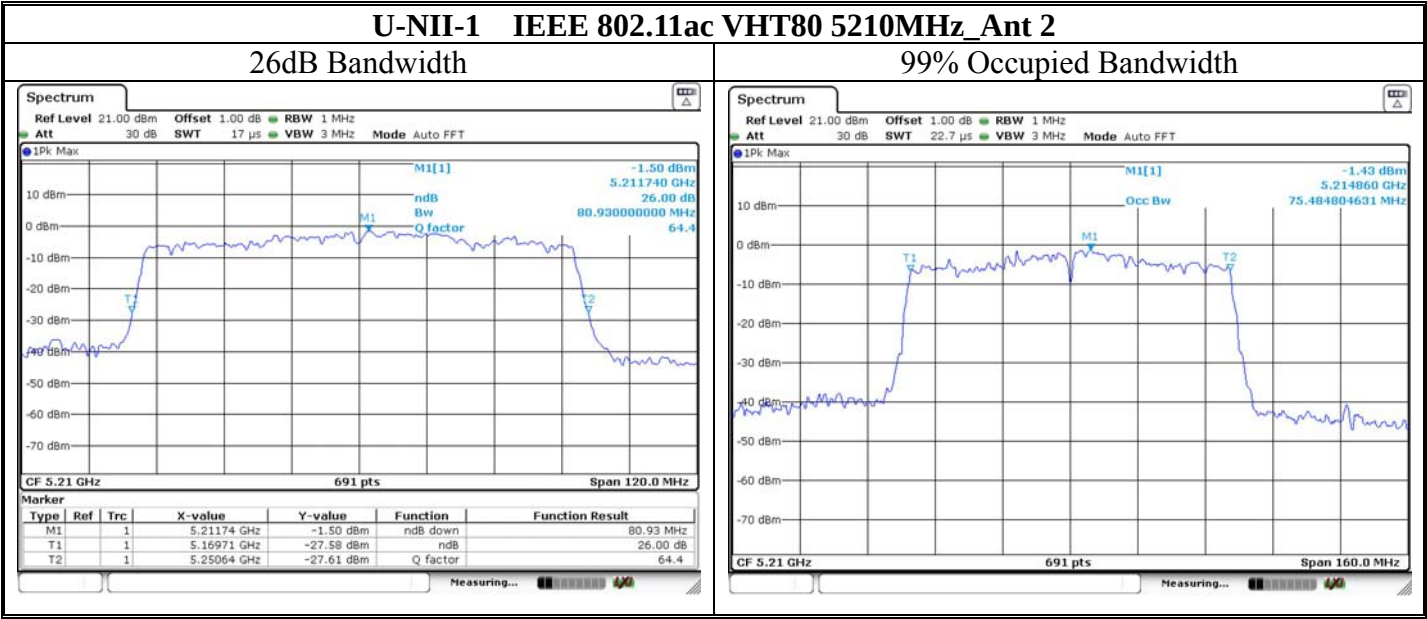U-NII-1 IEEE 802.11ac VHT40 5230MHz_Ant 1**26dB Bandwidth****99% Occupied Bandwidth****U-NII-1 IEEE 802.11ac VHT40 5230MHz_Ant 2****26dB Bandwidth****99% Occupied Bandwidth****U-NII-1 IEEE 802.11ac VHT80 5210MHz_Ant 1****26dB Bandwidth****99% Occupied Bandwidth**



U-NII-3 IEEE 802.11a 5745MHz_Ant 1

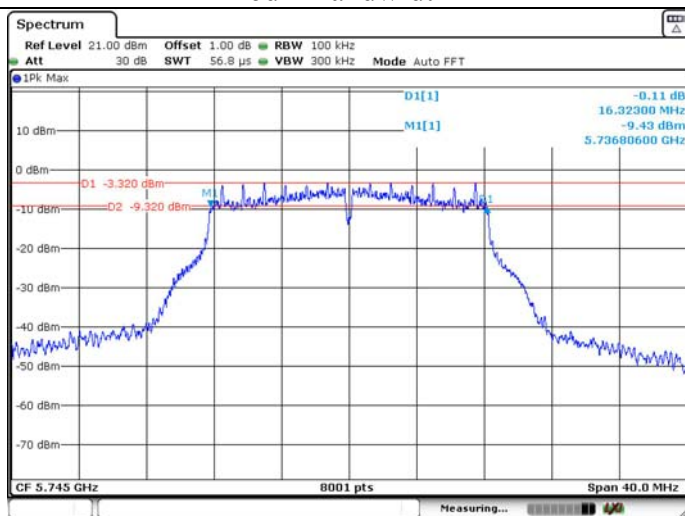6dB Bandwidth




99% Occupied Bandwidth



U-NII-3 IEEE 802.11a 5785MHz_Ant 1

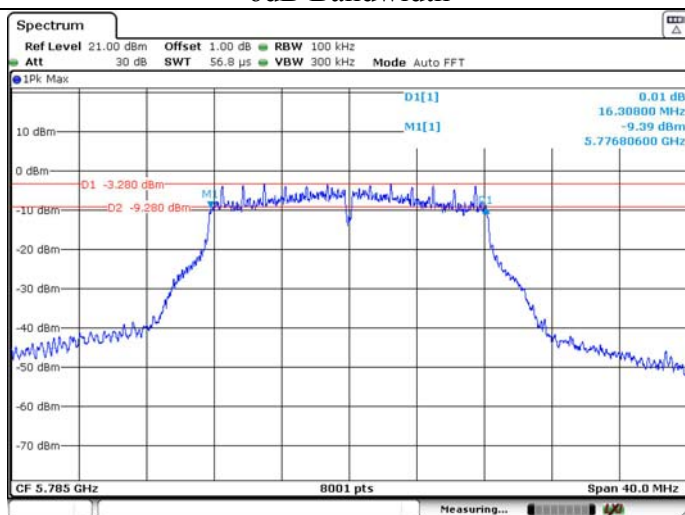6dB Bandwidth




99% Occupied Bandwidth



U-NII-3 IEEE 802.11a 5825MHz_Ant 1

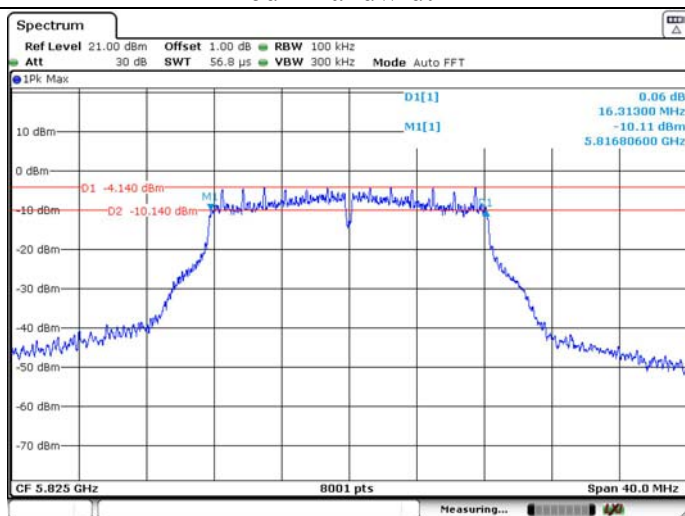6dB Bandwidth




99% Occupied Bandwidth



U-NII-3 IEEE 802.11a 5745MHz_Ant 2

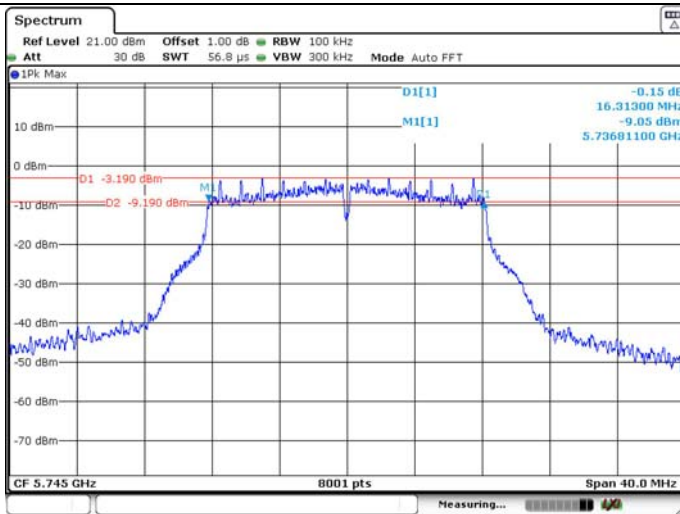6dB Bandwidth




99% Occupied Bandwidth



U-NII-3 IEEE 802.11a 5785MHz_Ant 2

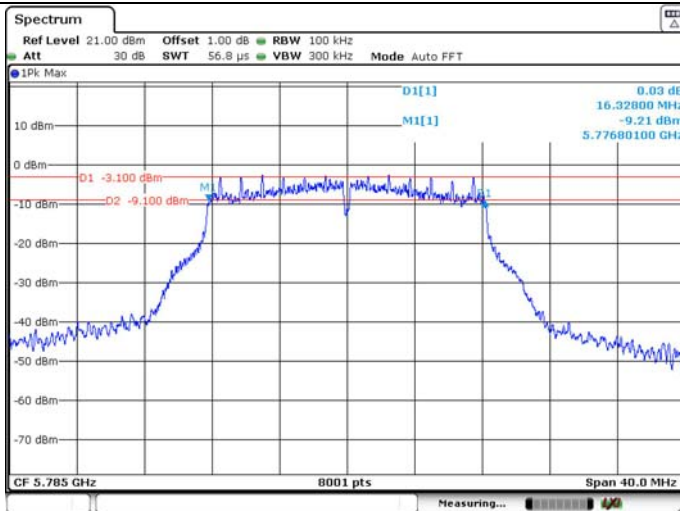6dB Bandwidth




99% Occupied Bandwidth







U-NII-3 IEEE 802.11a 5825MHz_Ant 2




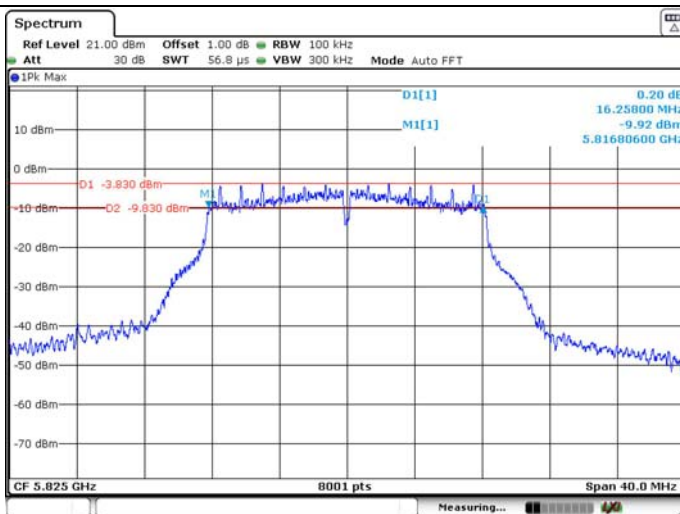
6dB Bandwidth







99% Occupied Bandwidth

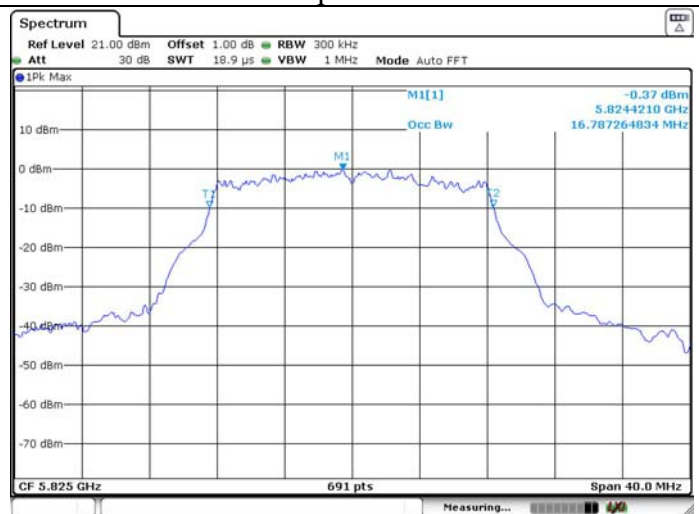

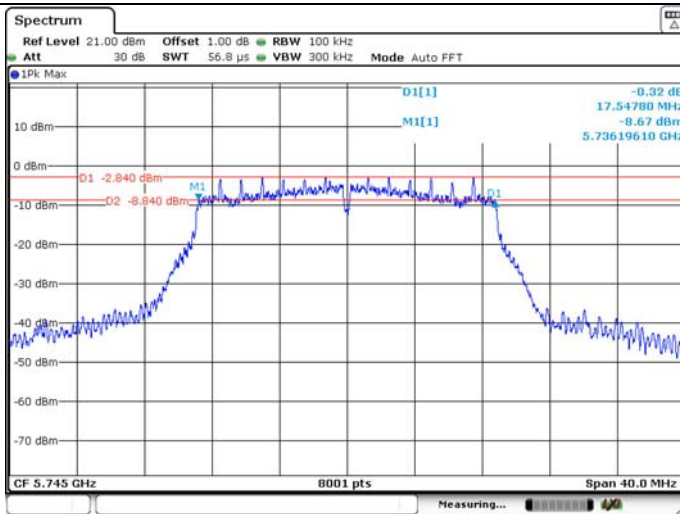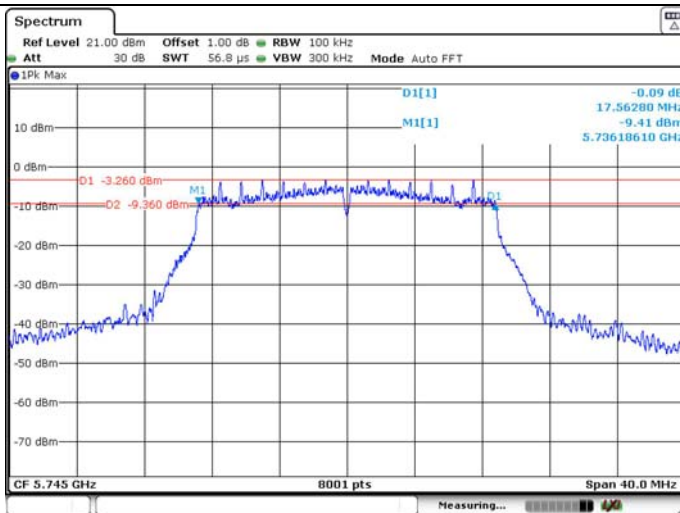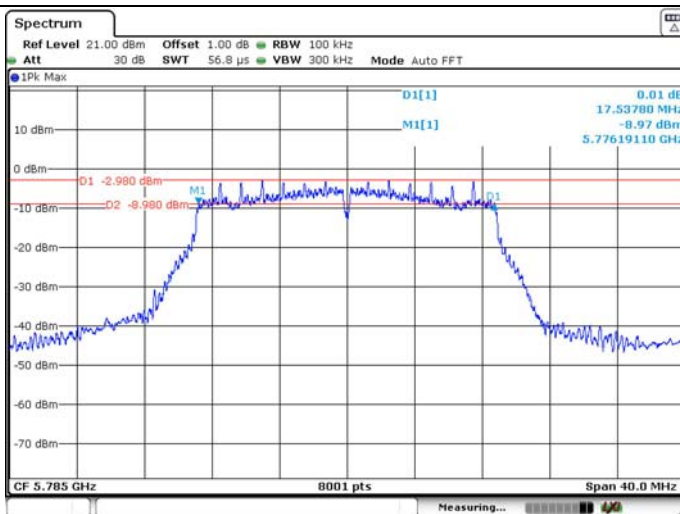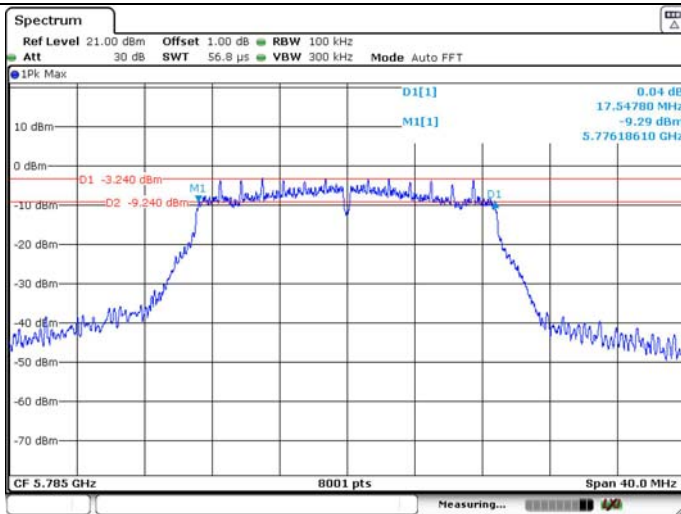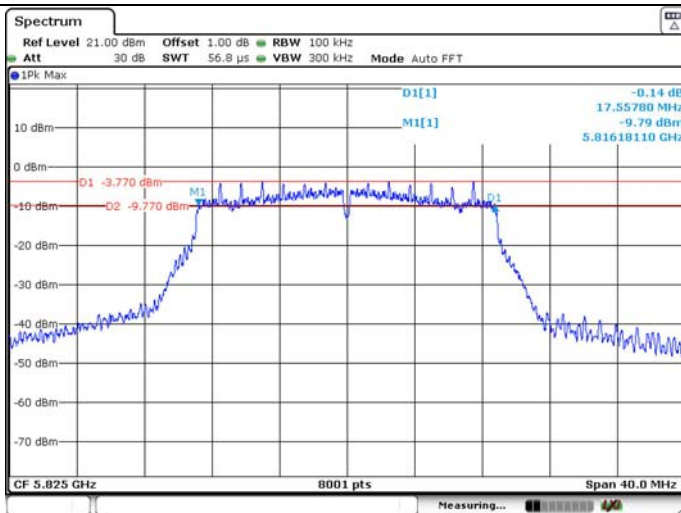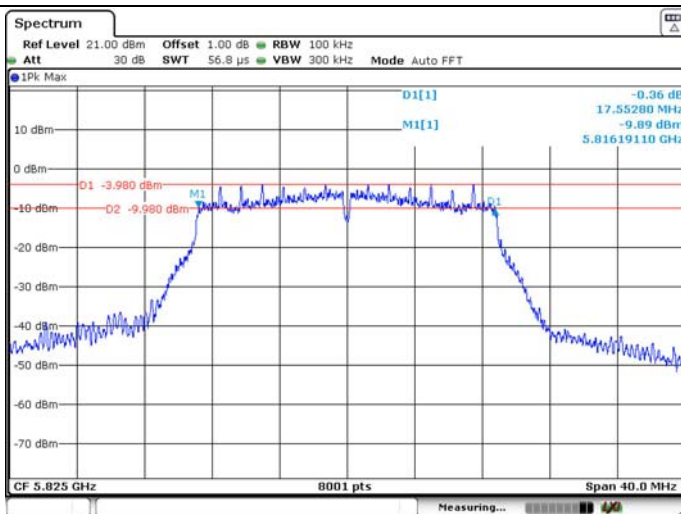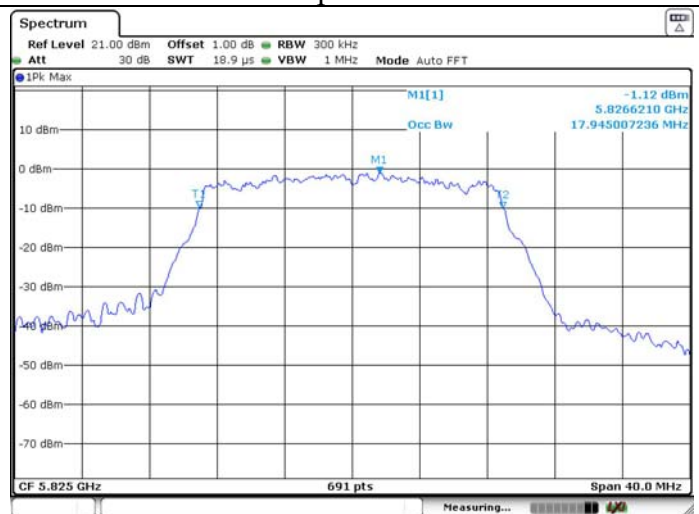
U-NII-3 IEEE 802.11n HT20 5745MHz_Ant 1**6dB Bandwidth****99% Occupied Bandwidth****U-NII-3 IEEE 802.11n HT20 5745MHz_Ant 2****6dB Bandwidth****99% Occupied Bandwidth****U-NII-3 IEEE 802.11n HT20 5785MHz_Ant 1****6dB Bandwidth****99% Occupied Bandwidth**

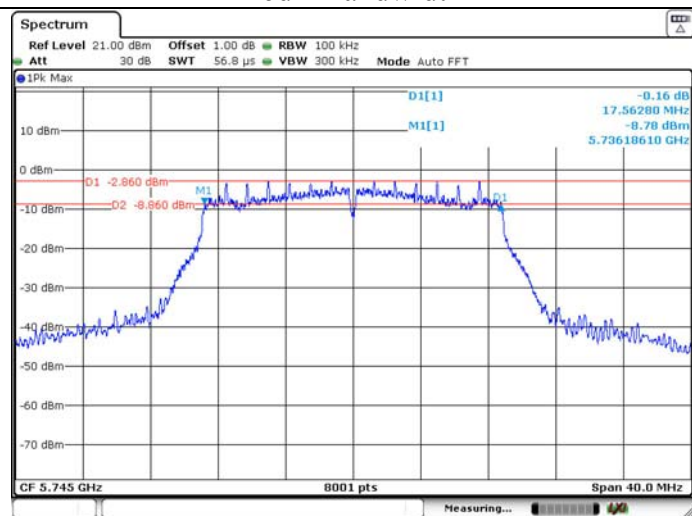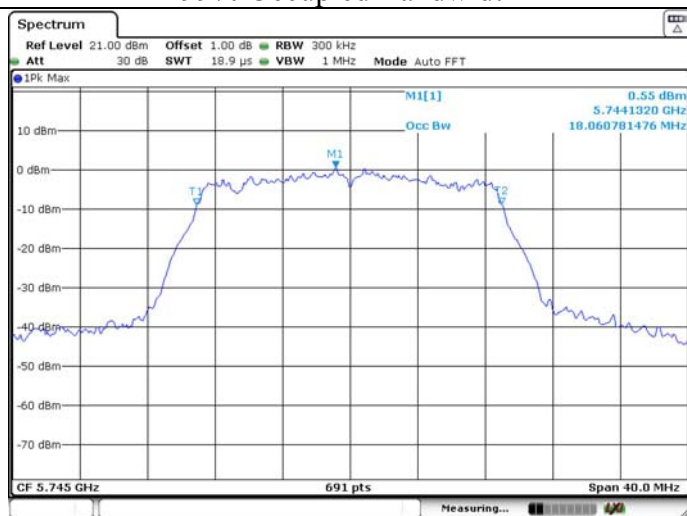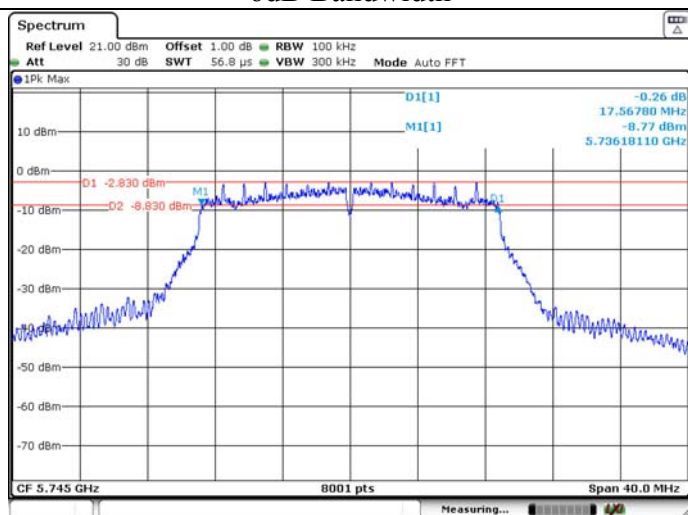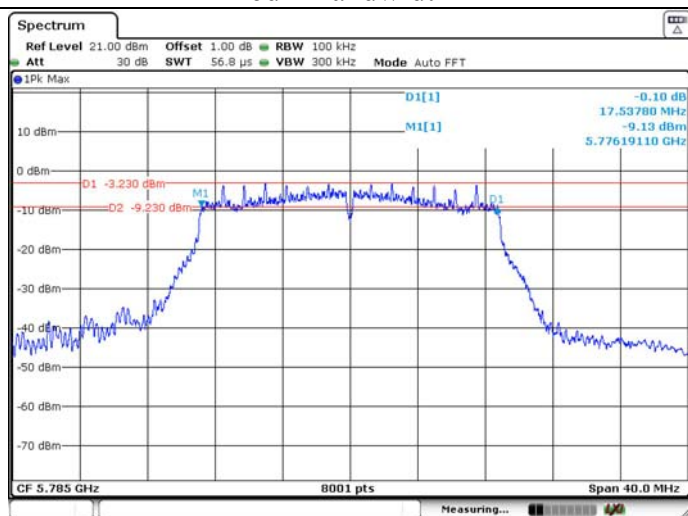U-NII-3 IEEE 802.11n HT20 5785MHz_Ant 2**6dB Bandwidth****99% Occupied Bandwidth****U-NII-3 IEEE 802.11n HT20 5825MHz_Ant 1****6dB Bandwidth****99% Occupied Bandwidth****U-NII-3 IEEE 802.11n HT20 5825MHz_Ant 2****6dB Bandwidth****99% Occupied Bandwidth**

U-NII-3 IEEE 802.11ac VHT20 5745MHz_Ant 1**6dB Bandwidth****99% Occupied Bandwidth****U-NII-3 IEEE 802.11ac VHT20 5745MHz_Ant 2****6dB Bandwidth****99% Occupied Bandwidth****U-NII-3 IEEE 802.11ac VHT20 5785MHz_Ant 1****6dB Bandwidth****99% Occupied Bandwidth**

U-NII-3 IEEE 802.11ac VHT20 5785MHz_Ant 2

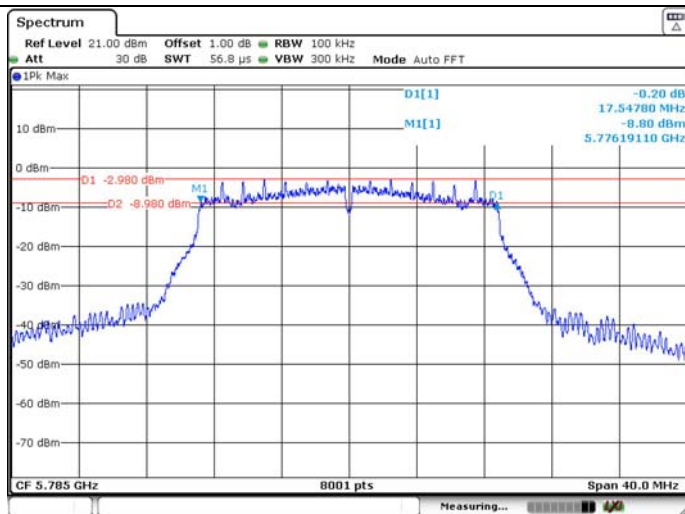6dB Bandwidth




99% Occupied Bandwidth




U-NII-3 IEEE 802.11ac VHT20 5825MHz_Ant 1

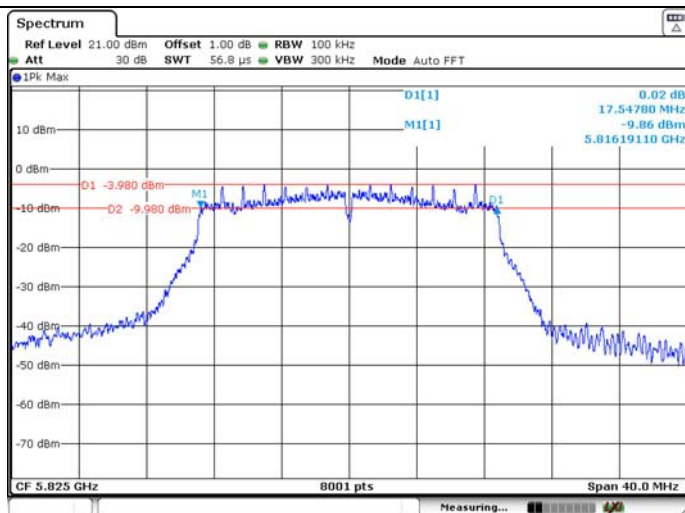6dB Bandwidth




99% Occupied Bandwidth

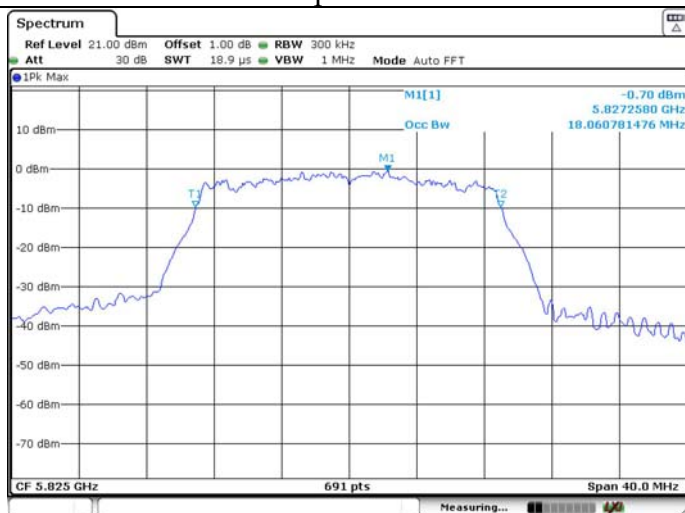




U-NII-3 IEEE 802.11ac VHT20 5825MHz_Ant 2





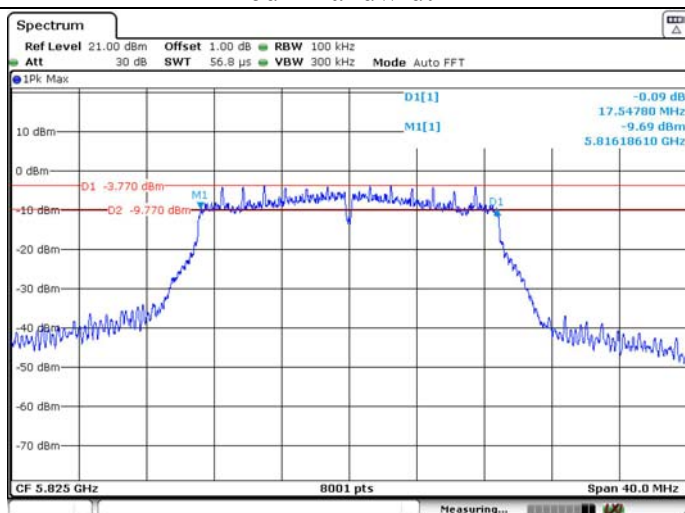
6dB Bandwidth







99% Occupied Bandwidth

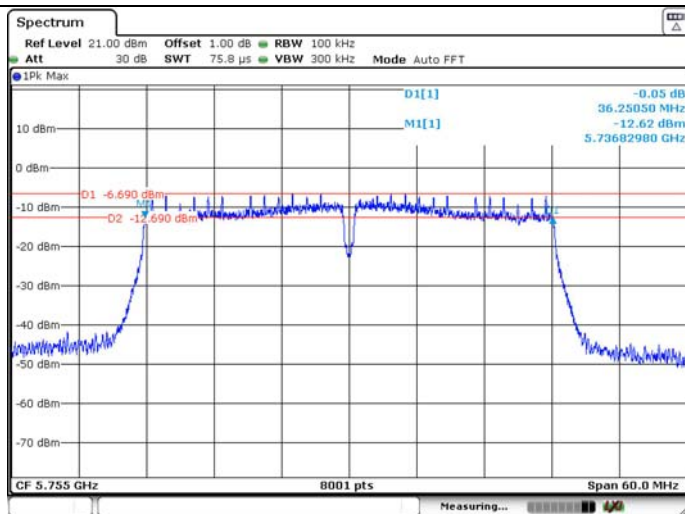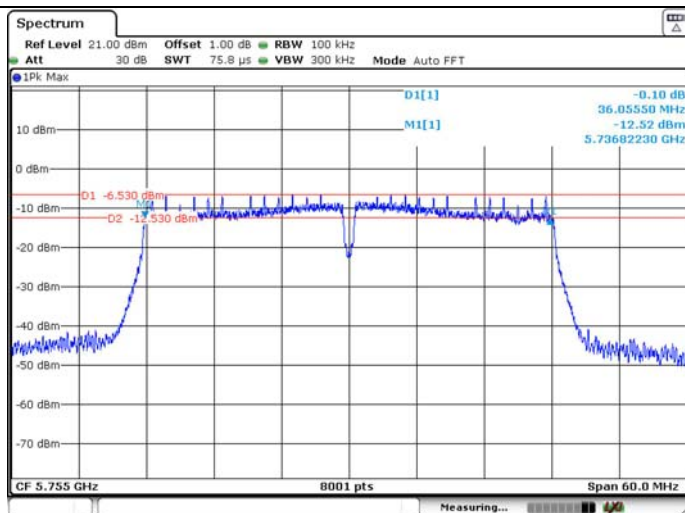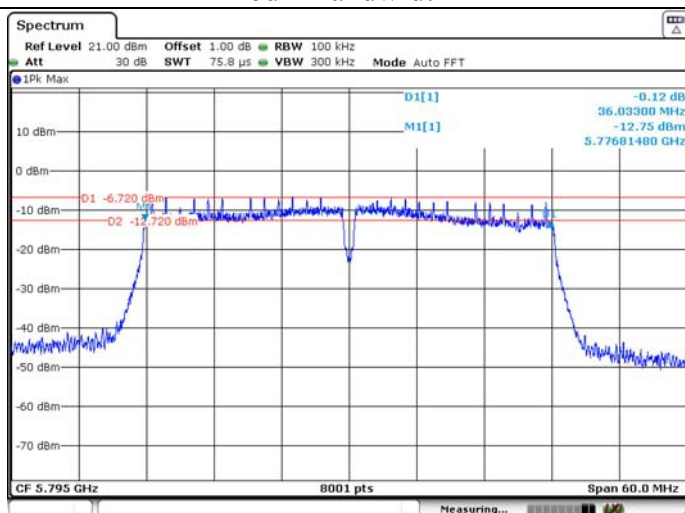

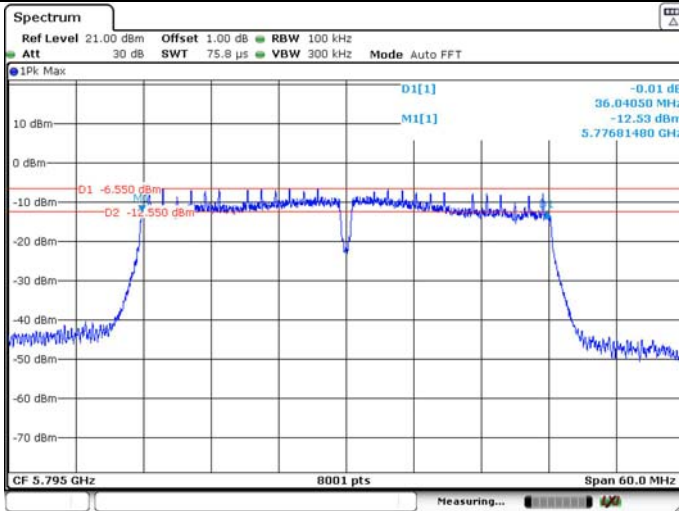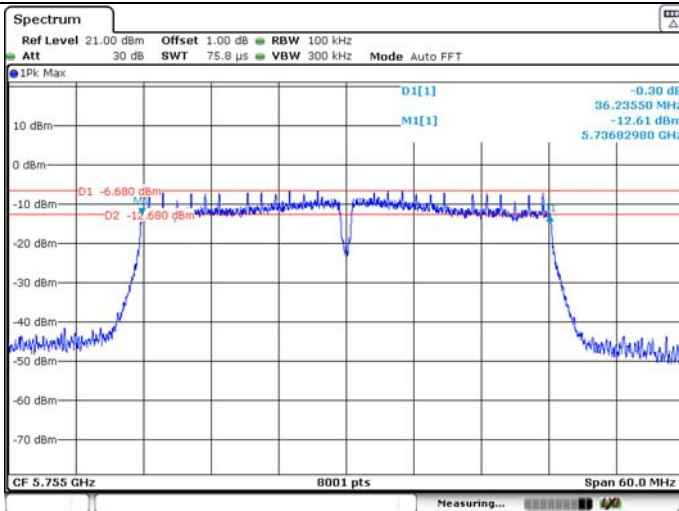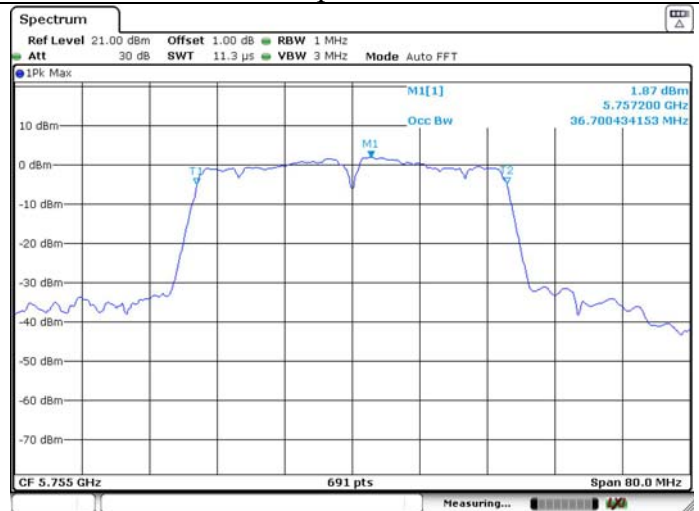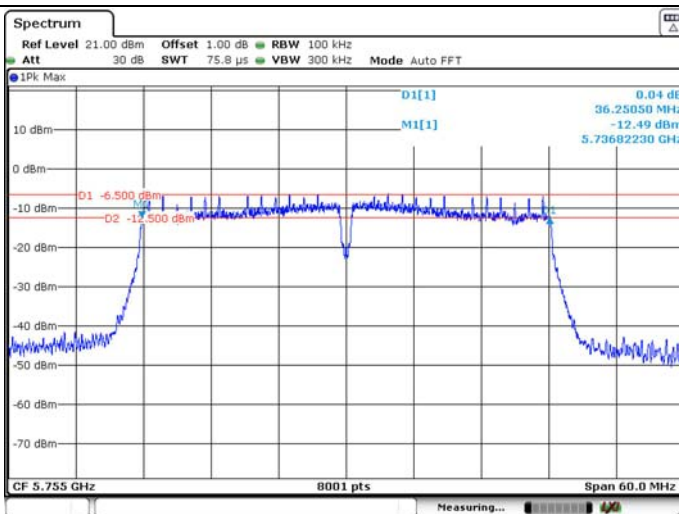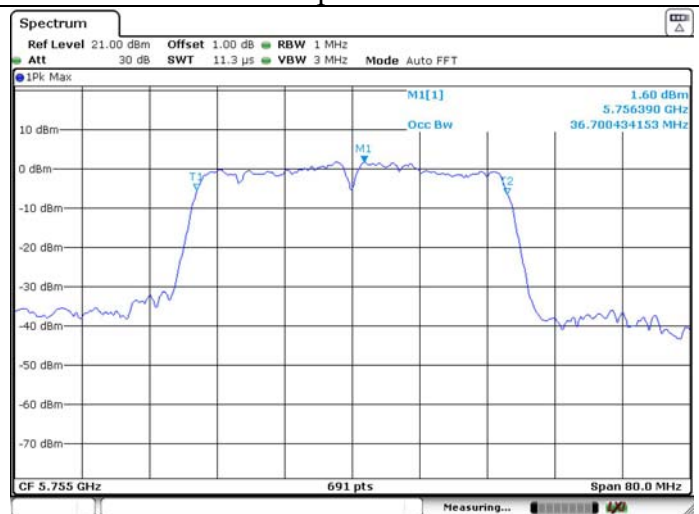U-NII-3 IEEE 802.11n HT40 5755MHz_Ant 1**6dB Bandwidth****99% Occupied Bandwidth****U-NII-3 IEEE 802.11n HT40 5755MHz_Ant 2****6dB Bandwidth****99% Occupied Bandwidth****U-NII-3 IEEE 802.11n HT40 5795MHz_Ant 1****6dB Bandwidth****99% Occupied Bandwidth**

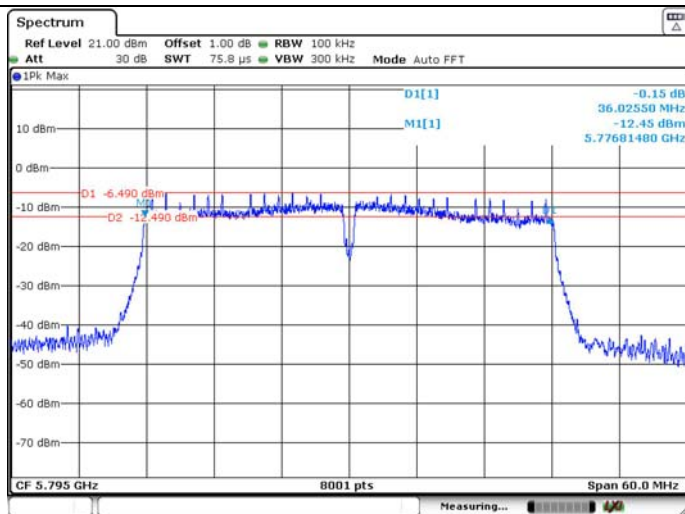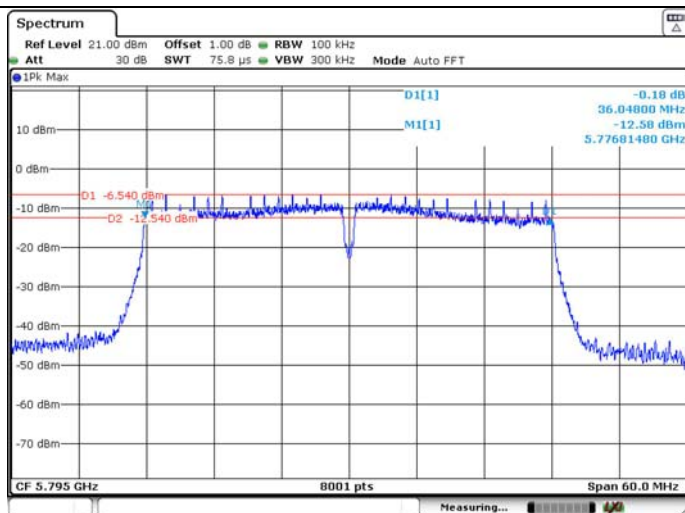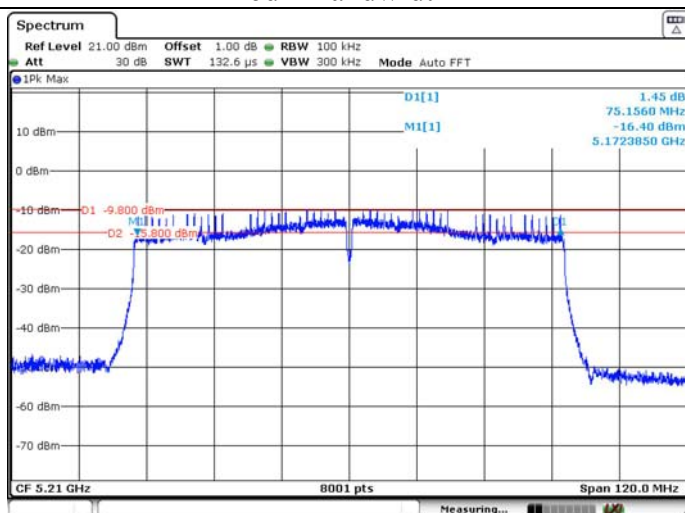U-NII-3 IEEE 802.11n HT40 5795MHz_Ant 2**6dB Bandwidth****99% Occupied Bandwidth****U-NII-3 IEEE 802.11ac VHT40 5755MHz_Ant 1****6dB Bandwidth****99% Occupied Bandwidth****U-NII-3 IEEE 802.11ac VHT40 5755MHz_Ant 2****6dB Bandwidth****99% Occupied Bandwidth**

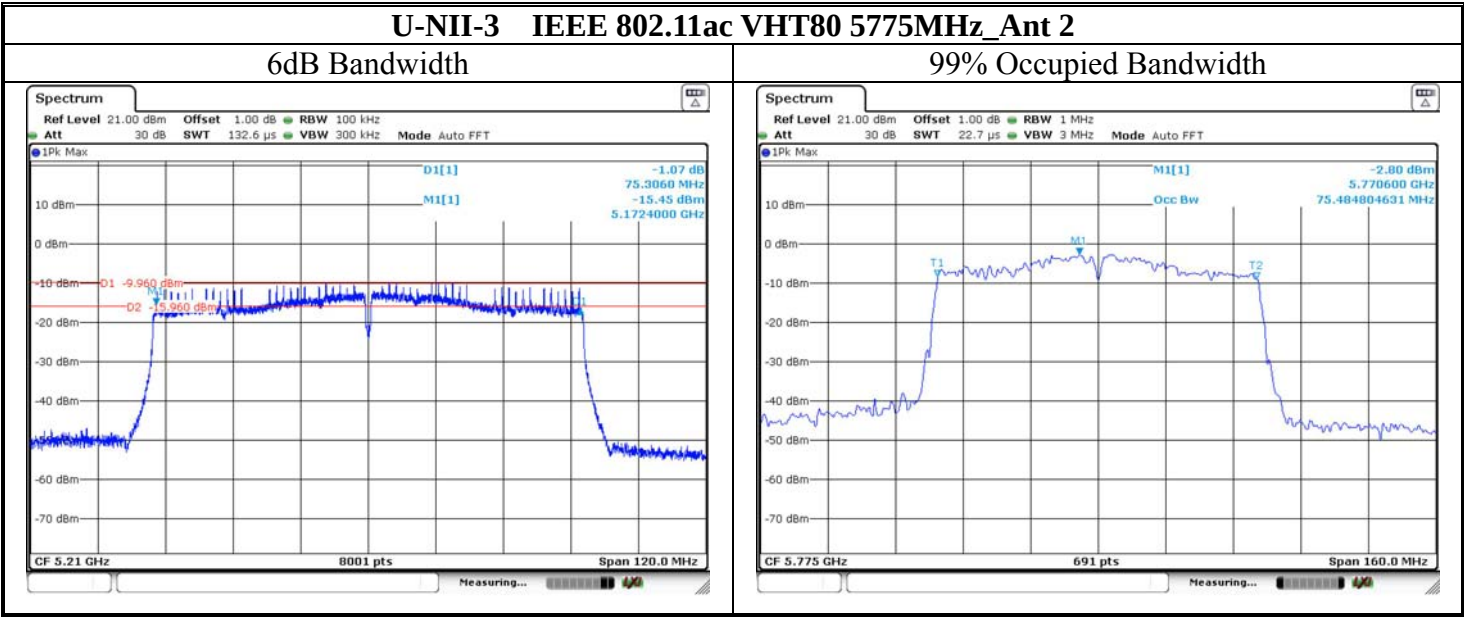U-NII-3 IEEE 802.11ac VHT40 5795MHz_Ant 1**6dB Bandwidth****99% Occupied Bandwidth****U-NII-3 IEEE 802.11ac VHT40 5795MHz_Ant 2****6dB Bandwidth****99% Occupied Bandwidth****U-NII-3 IEEE 802.11ac VHT80 5775MHz_Ant 1****6dB Bandwidth****99% Occupied Bandwidth**



4. MAXIMUM CONDUCTED OUTPUT POWER


4.1. Limit

Band	EUT Type	Limit
U-NII-1	Outdoor Access Point	1W(30dBm) (Max. e.i.r.p $\leq 125\text{mW}$ at any elevation angle above 30 degrees as measured from the horizon)
	Indoor Access Point	1W(30dBm)
	Fixed point-to-point Access Point	1W(30dBm)
	Mobile and Portable Client Device	250mW(23.98dBm)
U-NII-2A	All Device	250mW(23.98dBm) or $11\text{dBm} + 10 \log B$, Which is lesser. (B is 26dB Bandwidth in MHz)
U-NII-2C	All Device	250mW(23.98dBm) or $11\text{dBm} + 10 \log B$, Which is lesser. (B is 26dB Bandwidth in MHz)
U-NII-3	All Device	1W(30dBm)

Note:

For the Band U-NII-2A and U-NII-2C, the maximum conducted output power limit calculate result refer to section 3.5.

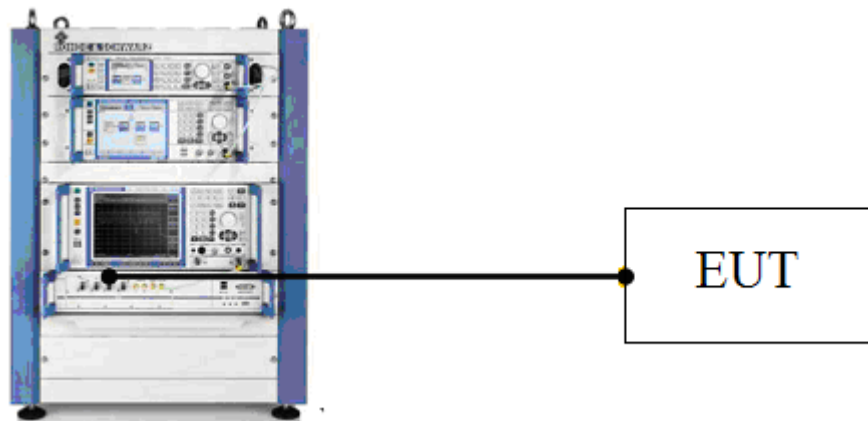4.2. Test Setup



4.3. Test Procedure

- Connect EUT antenna terminal to the OSP-B157WB with RF cable.
- Set the EUT transmit continuously with maximum output power.
- Through the test software in TS8897 to control a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Because the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.
- Repeat above procedures until all modes and channels were measured.
- Record the results in the test report.

4.4. Test Result

Temperature	24℃	Relative Humidity			55%	Test Voltage	AC 120V/60Hz	
BAND	Test Mode	Fre (MHz)	Conducted AVG Output Power (dBm)		Total Conducted Output Power (W)	Total Conducted Output Power (dBm)	Limit (dBm)	Result
			Ant 1	Ant 2				
U-NII-1	IEEE 802.11a	5180	14.32	15.25	0.0335	--	23.98	PASS
		5200	14.82	15.60	0.0363	--	23.98	PASS
		5240	15.48	15.81	0.0381	--	23.98	PASS
	IEEE 802.11n HT20	5180	13.97	15.08	0.05716	17.57	23.98	PASS
		5200	12.23	12.71	0.03537	15.49	23.98	PASS
		5240	12.60	13.17	0.03896	15.91	23.98	PASS
	IEEE 802.11ac VHT20	5180	13.99	15.10	0.05741	17.59	23.98	PASS
		5200	14.74	15.44	0.06474	18.11	23.98	PASS
		5240	15.36	15.65	0.07109	18.52	23.98	PASS
	IEEE 802.11n HT40	5190	12.91	14.36	0.04683	16.70	23.98	PASS
		5230	13.70	14.28	0.05023	17.01	23.98	PASS
	IEEE 802.11ac VHT40	5190	12.83	13.68	0.04248	16.28	23.98	PASS
		5230	13.17	14.04	0.04605	16.63	23.98	PASS
	IEEE 802.11ac VHT80	5210	15.74	16.67	0.08393	19.24	23.98	PASS


BAND	Test Mode	Fre (MHz)	Conducted AVG Output Power (dBm)		Total Conducted Output Power (W)	Total Conducted Output Power (dBm)	Limit (dBm)	Result
			Ant 1	Ant 2				
U-NII-3	IEEE 802.11a	5745	14.31	14.82	0.03035	--	30.00	PASS
		5785	13.31	14.34	0.02717	--	30.00	PASS
		5825	12.46	13.32	0.02145	--	30.00	PASS
	IEEE 802.11n HT20	5745	14.02	14.70	0.05474	17.38	30.00	PASS
		5785	13.16	14.21	0.04702	16.72	30.00	PASS
		5825	12.33	13.17	0.03785	15.78	30.00	PASS
	IEEE 802.11ac VHT20	5745	13.89	14.65	0.05367	17.30	30.00	PASS
		5785	13.08	14.26	0.04701	16.72	30.00	PASS
		5825	12.31	13.15	0.03767	15.76	30.00	PASS
	IEEE 802.11n HT40	5755	16.31	16.94	0.09222	19.65	30.00	PASS
		5795	14.66	15.63	0.06585	18.19	30.00	PASS
	IEEE 802.11ac VHT40	5755	16.21	16.96	0.09146	19.61	30.00	PASS
		5795	14.72	15.62	0.06614	18.20	30.00	PASS
	IEEE 802.11ac VHT80	5775	14.53	15.19	0.06141	17.88	30.00	PASS

5. PEAK POWER SPECTRAL DENSITY

5.1. Limit

Band	EUT Type	Limit
U-NII-1	Outdoor Access Point	17dBm/MHz
	Indoor Access Point	17dBm/MHz
	Fixed point-to-point Access Point	17dBm/MHz
	Mobile and Portable Client Device	11dBm/MHz
U-NII-2A	All Device	11dBm/MHz
U-NII-2C	All Device	11dBm/MHz
U-NII-3	All Device	30dBm/500KHz

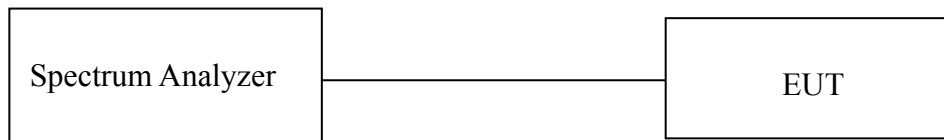5.2. Test Setup



5.3. Spectrum Analyzer Setting

Spectrum Parameters	Setting
RBW	1MHz(For U-NII-1&U-NII-2A&U-NII-2C) 500KHz(For U-NII-3)
VBW	3MHz(For U-NII-1&U-NII-2A&U-NII-2C) 2MHz(For U-NII-3)
Span	encompass the entire 26 dB EBW or 99% OBW of the signal
Sweep Time	Auto
Number of Sweep Point	$\geq 2 \times \text{SPAN/RBW}$
Detector	RMS(power averaging)
Trace Average	≥ 100 traces

5.4. Test Procedure

- Connect EUT antenna terminal to the spectrum analyzer with RF cable.
- Spectrum analyzer setting parameters in accordance with section 5.3.
- Set the EUT transmit continuously with maximum output power.
- Allow trace to stabilize, use the marker-to-peak function to set the marker to the average of the emission.
- If the duty cycle of test signal $< 98\%$, the result = max measured value + $10 \times \log(1/\text{duty cycle})$;
If the duty cycle of test signal $\geq 98\%$, the result = max measured value.
- Repeat above procedures until all modes and channels were measured.
- Record the results in the test report.

5.5. Test Result

Temperature		24℃	Relative Humidity		55%	Test Voltage	AC 120V/60Hz	
BAND	Test Mode	Fre (MHz)	Power Density (dBm/MHz)		Duty Factor (dB)	Total Power Density (dBm/MHz)	Limit (dBm/MHz)	Result
			Ant 1	Ant 2				
U-NII-1	IEEE 802.11a	5180	6.90	6.99	0.24	--	11.00	PASS
		5200	7.47	7.18	0.24	--	11.00	PASS
		5240	6.71	6.70	0.24	--	11.00	PASS
	IEEE 802.11n HT20	5180	6.20	6.77	0.25	9.76	11.00	PASS
		5200	5.77	5.65	0.25	8.97	11.00	PASS
		5240	5.17	5.70	0.25	8.71	11.00	PASS
	IEEE 802.11ac VHT20	5180	5.79	6.17	0.27	9.27	11.00	PASS
		5200	6.25	7.40	0.27	10.15	11.00	PASS
		5240	6.50	7.30	0.27	10.20	11.00	PASS
	IEEE 802.11n HT40	5190	2.27	2.68	0.54	6.03	11.00	PASS
		5230	2.68	3.74	0.54	6.79	11.00	PASS
	IEEE 802.11ac VHT40	5190	2.34	2.79	0.49	6.07	11.00	PASS
		5230	2.81	2.68	0.49	6.25	11.00	PASS
	IEEE 802.11ac VHT80	5210	-1.09	-0.32	0.99	3.31	11.00	PASS


BAND	Test Mode	Fre (MHz)	Power Density (dBm/500KHz)		Duty Factor (dB)	Total Power Density (dBm/500KHz)	Limit (dBm/500KHz)	Result
			Ant 1	Ant 2				
U-NII-3	IEEE 802.11a	5745	2.20	2.79	0.24	--	30.00	PASS
		5785	1.94	2.51	0.24	--	30.00	PASS
		5825	1.57	1.69	0.24	--	30.00	PASS
	IEEE 802.11n HT20	5745	1.87	2.69	0.25	5.56	30.00	PASS
		5785	1.90	2.48	0.25	5.46	30.00	PASS
		5825	1.22	1.77	0.25	4.77	30.00	PASS
	IEEE 802.11ac VHT20	5745	1.44	2.18	0.27	5.11	30.00	PASS
		5785	1.58	2.89	0.27	5.57	30.00	PASS
		5825	0.99	1.57	0.27	4.57	30.00	PASS
	IEEE 802.11n HT40	5755	-1.84	-1.46	0.54	1.90	30.00	PASS
		5795	-1.58	-1.41	0.54	2.05	30.00	PASS
	IEEE 802.11ac VHT40	5755	-1.85	-0.77	0.49	2.22	30.00	PASS
		5795	-1.82	-1.56	0.49	1.81	30.00	PASS
	IEEE 802.11ac VHT80	5775	-6.13	-6.76	0.99	-2.43	30.00	PASS

U-NII-1 IEEE 802.11a 5180MHz

ANT 1




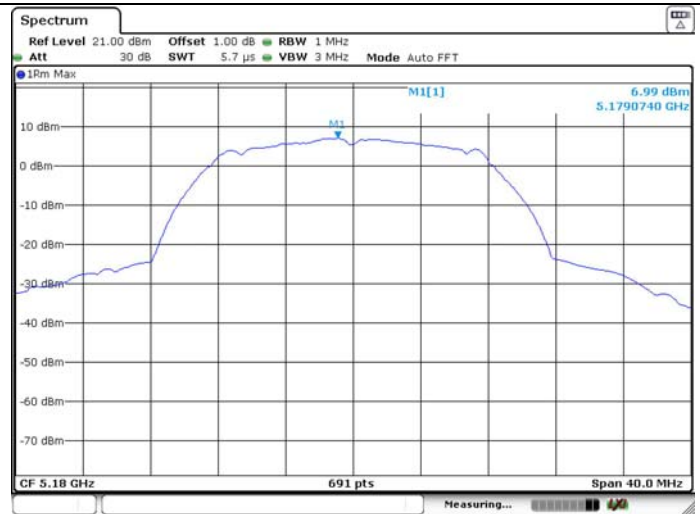ANT 2



U-NII-1 IEEE 802.11a 5200MHz

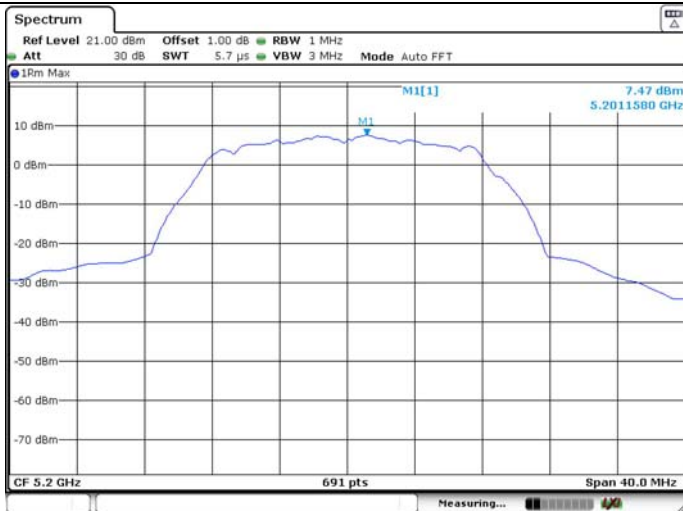ANT 1



ANT 2



U-NII-1 IEEE 802.11a 5240MHz

ANT 1



ANT 2



