

FCC PART 15E TEST REPORT FOR CERTIFICATION
On Behalf of

AUDIO PRO AB

MULTIROOM WIFI PLAYER

Model Number: LINK2

FCC ID: 2AGNC-LINK2

Applicant :	AUDIO PRO AB
Address:	Garnisonsgatan 52, 25466, Helsingborg, Sweden
Prepared By:	EST Technology Co., Ltd.
	Chilingxiang, Qishantou, Santun, Houjie, Dongguan, Guangdong, China
	Tel: 86-769-83081888-808





Report Number:	ESTE-R2205108
Date of Test:	Nov. 22, 2021~May. 17, 2022
Date of Report:	May. 20, 2022

TABLE OF CONTENTS

Description	Page
TEST REPORT VERIFICATION.....	3
1. GENERAL INFORMATION.....	5
1.1. Description of Device (EUT).....	5
1.2. The antenna information for EUT.....	6
1.3. Information of RF Cable.....	6
2. SUMMARY OF TEST.....	7
2.1. Summary of test result.....	7
2.2. Test Facilities.....	8
2.3. Measurement uncertainty for EST Technology Co., Ltd.....	9
2.4. Assistant equipment used for test.....	9
2.5. Block Diagram.....	9
2.6. Test Mode.....	10
2.7. Channel List.....	12
2.8. Power Setting of Test Software.....	13
2.9. Duty Cycle of Test Signal.....	14
2.10. Test Equipment List.....	18
3. 6DB BANDWIDTH & 26DB BANDWIDTH & 99% OCCUPIED BANDWIDTH.....	20
3.1. Limit.....	20
3.2. Test Setup.....	20
3.3. Spectrum Analyzer Setting.....	20
3.4. Test Procedure.....	21
3.5. Test Result.....	22
3.6. Test Result.....	24
4. MAXIMUM CONDUCTED OUTPUT POWER.....	34
4.1. Limit.....	34
4.2. Test Setup.....	34
4.3. Test Procedure.....	34
4.4. Test Result.....	35
5. PEAK POWER SPECTRAL DENSITY.....	37
5.1. Limit.....	37
5.2. Test Setup.....	37
5.3. Spectrum Analyzer Setting.....	37
5.4. Test Procedure.....	37
5.5. Test Result.....	38
6. UNWANTED EMISSIONS AND BAND EDGE.....	51
6.1. Limit.....	51
6.2. Test Setup.....	52
6.3. Spectrum Analyzer Setting.....	53
6.4. Test Procedure.....	54
6.5. Test Result.....	55
7. FREQUENCY STABILITY.....	81
7.1. Limit.....	81
7.2. Test Setup.....	81
7.3. Spectrum Analyzer Setting.....	81

- 7.4. Test Procedure 82
- 7.5. Test Result 83
- 8. AC POWER LINE CONDUCTED EMISSIONS 85
 - 8.1. Limit 85
 - 8.2. Test Setup 85
 - 8.3. Spectrum Analyzer Setting 85
 - 8.4. Test Procedure 85
 - 8.5. Test Result 86
- 9. ANTENNA REQUIREMENTS 90
 - 9.1. Limit 90
 - 9.2. Test Result 90
- 10. TEST SETUP PHOTO 91
- 11. EUT PHOTO 93

EST Technology Co., Ltd.

Applicant:	AUDIO PRO AB		
Address:	Garnisonsgatan 52, 25466, Helsingborg, Sweden		
Manufacturer:	AUDIO PRO AB		
Address:	Garnisonsgatan 52, 25466, Helsingborg, Sweden		
Factory:	DONGGUAN TRISTAR ELECTRONIC CO., LTD.		
Address:	Building 1& Building2, No. 196, Tangxia Dongxing Road, Tangxia Town, Dongguan City, Guangdong Province, China		
E.U.T:	MULTIROOM WIFI PLAYER		
Model Number:	LINK2		
Power Supply:	DC 12V From Adapter Input AC 100-240V~50/60Hz		
Trade Name:		Serial No.:	-----
Date of Receipt:	Sep. 24, 2021	Date of Test:	Nov. 22, 2021~May. 17, 2022
Test Specification:	FCC Part 15 Subpart E 15.407 ANSI C63.10:2013 FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01 FCC KDB 662911 D01 Multiple Transmitter Output v02r01		
Test Result:	The device described above is tested by EST Technology Co., Ltd. The measurement results were contained in this test report and EST Technology Co., Ltd. was assumed full responsibility for the accuracy and completeness of these measurements. Also, this report shows that the EUT to be technically compliance with the FCC Rules and Regulations Part 15 Subpart E requirements. This report applies to above tested sample only and shall not be reproduced in part without written approval of EST Technology Co., Ltd. <p style="text-align: right;">Date: May. 20, 2022</p>		
Prepared by:	Reviewed by:	Approved by:	
			
Ring Yang / Assistant	Seven Wang / Engineer	Iceman Hu / Manager	
Other Aspects:	None.		
<i>Abbreviations: OK/P=passed fail/F=failed n.a/N=not applicable E.U.T=equipment under tested</i>			
<i>This test report is based on a single evaluation of one sample of above mentioned products ,It is not permitted to be duplicated in extracts without written approval of EST Technology Co., Ltd.</i>			

1. GENERAL INFORMATION

1.1. Description of Device (EUT)

FCC ID	:	2AGNC-LINK2	
Product Name	:	MULTIROOM WIFI PLAYER	
Model Number	:	LINK2	
Software Version	:	TR1.1	
Hardware Version	:	V1.2	
Operation frequency	:	U-NII-1: 5150 MHz~5250 MHz U-NII-3: 5725 MHz~5850 MHz	
Number of channel	:	U-NII-1: IEEE 802.11a / n HT20 / ac VHT20: 4 Channels; IEEE 802.11n HT40 / ac VHT40: 2 Channels; IEEE 802.11ac VHT80: 1 Channel. U-NII-3: IEEE 802.11a / n HT20 / ac VHT20: 5 Channels; IEEE 802.11n HT40 / ac VHT40: 2 Channels; IEEE 802.11ac VHT80: 1 Channel.	
Modulation	:	OFDM(QPSK, BPSK, 16-QAM, 64-QAM,256-QAM)	
Transmit Data Rate	:	IEEE 802.11a: 54, 48, 36, 24, 18, 12, 9, 6Mbps; IEEE 802.11n: up 150Mbps; IEEE 802.11ac: up to 433.3Mbps;	
Channels Spacing	:	IEEE 802.11a: 20MHz; IEEE 802.11n HT20: 20MHz; IEEE 802.11n HT40: 40MHz; IEEE 802.11ac VHT20: 20MHz; IEEE 802.11ac VHT40: 40MHz; IEEE 802.11ac VHT80: 80MHz;	
Transmit Power	:	U-NII-1 U-NII-3	IEEE 802.11a: 18.131dBm IEEE 802.11n HT20: 15.975dBm IEEE 802.11n HT40: 17.089dBm IEEE 802.11ac VHT20: 15.913dBm IEEE 802.11ac VHT40: 17.124dBm IEEE 802.11ac VHT80: 13.896dBm IEEE 802.11a: 17.021dBm IEEE 802.11n HT20: 15.016dBm IEEE 802.11n HT40: 16.009dBm IEEE 802.11ac VHT20: 14.932dBm IEEE 802.11ac VHT40: 15.035dBm IEEE 802.11ac VHT80: 12.450dBm
Sample Type	:	Prototype production	

Note:

For a more detailed features description, please refer to the manufacturer’s specifications or the user's manual.

1.2. The antenna information for EUT

Ant No.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)
1	-	-	Internal	-	2
2	-	-	Internal	-	2

Remark:

- (1) The EUT can work as CDD mode in IEEE 802.11n and IEEE 802.11ac, and can operate with one spatial stream.

According to KDB 662911 F 2) f) (i):

$$\text{Directional gain} = 2\text{dBi} + 10 \times \log(2/1)\text{dB} = 5.01\text{dBi} < 6\text{dBi}$$

So, the output power limit and power spectral density no need to be reduced.

- (2) After pre-test all antenna configurations, the worst case configuration as list below.
- (3) This information is provided by the applicant.

TX Mode \ ANT No.	SISO Configuration	MIMO Configuration
IEEE 802.11a	ANT 1 and ANT 2	/
IEEE 802.11n HT20	/	ANT1+ANT2
IEEE 802.11n HT40	/	ANT1+ANT2
IEEE 802.11ac VHT20	/	ANT1+ANT2
IEEE 802.11ac VHT40	/	ANT1+ANT2
IEEE 802.11ac VHT80	/	ANT1+ANT2

1.3. Information of RF Cable

Cable Loss(dB)	Provided by
1.0	AUDIO PRO AB
Note: 1. The customer declared the loss value of the RF Cable, and the test results of this report only apply to the sample as received. 2. This information is provided by the applicant.	

2. SUMMARY OF TEST

2.1. Summary of test result

Report Section	Description of Test Item	FCC Standard Section	Results
3	6dB Bandwidth & 26dB Bandwidth & 99% Occupied Bandwidth	15.407(a) 15.407(e)	PASS
4	Maximum Conducted Output Power	15.407(a)	PASS
5	Peak Power Spectral Density	15.407(a)	PASS
6	Unwanted Emissions and Band Edge	15.205 15.209 15.407(b)	PASS
7	Frequency Stability	15.407(g)	PASS
8	AC Power Line Conducted Emissions	15.207 15.407(b)(9)	PASS
9	Antenna Requirement	15.203	PASS

Note:

(1) "N/A" denotes test is not applicable in this test report

2.2. Test Facilities

EMC Lab : Certificated by CNAS, CHINA
Registration No.: L5288
This Certificate is valid until: November 12, 2023

Certificated by FCC, USA
Designation Number: CN1215
This Certificate is valid until: January 31, 2024

Certificated by A2LA, USA
Registration No.: 4366.01
This Certificate is valid until: January 31, 2024

Certificated by Industry Canada
CAB identifier No.: CN0035
This Certificate is valid until: January 31, 2024

Certificated by VCCI, Japan
Registration No.:C-14103; T-20073; R-13663;
R-20103; G-20097
Date of registration: Apr. 20, 2020
This Certificate is valid until: Apr. 19, 2023

Certificated by TUV Rheinland, Germany
Registration No.: UA 50413872 0001
Date of registration: July 31, 2018

Certificated by Intertek
Registration No.: 2011-RTL-L2-64
Date of registration: November 08, 2018

Name of Firm : EST Technology Co., Ltd.

Site Location : Chilingxiang, Qishantou, Santun, Houjie, Dongguan,
Guangdong, China

2.3. Measurement uncertainty for EST Technology Co., Ltd.

Test Item	Uncertainty
Uncertainty for Conduction emission test	2.54dB
Uncertainty for spurious emissions test (Below 30MHz)	±1.62 dB
Uncertainty for Radiation Emission test (30MHz-1GHz)	3.62
Uncertainty for Radiation Emission test (1GHz to 18GHz)	4.86
Uncertainty for spurious emissions test (18GHz to 40GHz)	4.67
Uncertainty for radio frequency	7×10 ⁻⁸
Uncertainty for conducted RF Power	1.08dB
Uncertainty for Power density test	0.26dB
Temperature	±0.6°C
Humidity	±4.0 %
Volatage DC	±1.0%
Volatage (AC, <10KHz)	±1.5%

Note:

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.


2.4. Assistant equipment used for test

Item	Equipment	Brand	Model Name/Type No.	FCC ID	Series No.
A	Adapter	-	BI12T-120100-I	-	-

Item	Shielded Type	Ferrite Core	Length	Note
1	NO	NO	1.5m	DC Cable

2.5. Block Diagram

For radiated emissions test: EUT was placed on a turn table, which is 0.8 (or 1.5) meter high above ground.



(EUT: MULTIROOM WIFI PLAYER)

2.6. Test Mode

Pre-scan has been combined all possible modulations and data rates to determine the worst case test mode, the worst case test mode was selected for the final test as listed below.

Test Item	Test Mode	Channel	Modulation	Data rate
6dB Bandwidth	IEEE 802.11a	149/157/165	OFDM	6Mbps
	IEEE 802.11n HT20	149/157/165	OFDM	MCS0
	IEEE 802.11n HT40	151/159	OFDM	MCS0
	IEEE 802.11ac VHT20	149/157/165	OFDM	MCS0
	IEEE 802.11ac VHT40	151/159	OFDM	MCS0
	IEEE 802.11ac VHT80	155	OFDM	MCS0
26dB Bandwidth	IEEE 802.11a	36/40/48	OFDM	6Mbps
	IEEE 802.11n HT20	36/40/48	OFDM	MCS0
	IEEE 802.11n HT40	38/46	OFDM	MCS0
	IEEE 802.11ac VHT20	36/40/48	OFDM	MCS0
	IEEE 802.11ac VHT40	38/46	OFDM	MCS0
	IEEE 802.11ac VHT80	42	OFDM	MCS0
99% Occupied Bandwidth	IEEE 802.11a	36/40/48/149/157/165	OFDM	6Mbps
	IEEE 802.11n HT20	36/40/48/149/157/165	OFDM	MCS0
	IEEE 802.11n HT40	38/46/151/159	OFDM	MCS0
	IEEE 802.11ac VHT20	36/40/48/149/157/165	OFDM	MCS0
	IEEE 802.11ac VHT40	38/46/151/159	OFDM	MCS0
	IEEE 802.11ac VHT80	42/155	OFDM	MCS0
Maximum Conducted Output Power	IEEE 802.11a	36/40/48/149/157/165	OFDM	6Mbps
	IEEE 802.11n HT20	36/40/48/149/157/165	OFDM	MCS0
	IEEE 802.11n HT40	38/46/151/159	OFDM	MCS0
	IEEE 802.11ac VHT20	36/40/48/149/157/165	OFDM	MCS0
	IEEE 802.11ac VHT40	38/46/151/159	OFDM	MCS0
	IEEE 802.11ac VHT80	42/155	OFDM	MCS0

Peak Power Spectral Density	IEEE 802.11a	36/40/48/149/157/165	OFDM	6Mbps
	IEEE 802.11n HT20	36/40/48/149/157/165	OFDM	MCS0
	IEEE 802.11n HT40	38/46/151/159	OFDM	MCS0
	IEEE 802.11ac VHT20	36/40/48/149/157/165	OFDM	MCS0
	IEEE 802.11ac VHT40	38/46/151/159	OFDM	MCS0
	IEEE 802.11ac VHT80	42/155	OFDM	MCS0
Unwanted Emissions and Band Edge(Above 1GHz)	IEEE 802.11a	36/40/48/149/157/165	OFDM	6Mbps
	IEEE 802.11n HT20	36/40/48/149/157/165	OFDM	MCS0
	IEEE 802.11n HT40	38/46/151/159	OFDM	MCS0
	IEEE 802.11ac VHT20	36/40/48/149/157/165	OFDM	MCS0
	IEEE 802.11ac VHT40	38/46/151/159	OFDM	MCS0
	IEEE 802.11ac VHT80	42/155	OFDM	MCS0
Unwanted Emissions Below 1GHz	IEEE 802.11a	100	OFDM	6Mbps
Frequency Stability	Unmodulation	36/149	N/A	N/A
AC Power Line Conducted Emissions	IEEE 802.11a	100	OFDM	6Mbps

Note:

1. In radiated measurement, the EUT had been pre-scan on the positioned of each 3 axis(X,Y,Z), the worst case was found when positioned on **X-plane**.

2.7. Channel List

Band	Mode	Channel	Frequency (MHz)
U-NII-1	IEEE 802.11a & n HT20 & ac VHT20	36	5180
		40	5200
		44	5220
		48	5240
	IEEE 802.11n HT40 & ac VHT40	38	5190
		46	5230
IEEE 802.11ac VHT80	42	5210	
U-NII-3	IEEE 802.11a & n HT20 & ac VHT20	149	5745
		153	5765
		157	5785
		161	5805
		165	5825
	IEEE 802.11n HT40 & ac VHT40	151	5755
		159	5795
	IEEE 802.11ac VHT80	155	5775

2.8. Power Setting of Test Software

Software Name	ADB		
U-NII-1			
Frequency(MHz)	5180	5200	5240
IEEE 802.11a Setting	21	21	21
IEEE 802.11n HT20 Setting	17	17	17
IEEE 802.11ac VHT20 Setting	17	17	17
Frequency(MHz)	5190	5230	
IEEE 802.11n HT40 Setting	19	19	
IEEE 802.11ac VHT40 Setting	19	19	
Frequency(MHz)	5210		
IEEE 802.11ac VHT80 Setting	19		
U-NII-3			
Frequency(MHz)	5745	5785	5825
IEEE 802.11a Setting	21	21	21
IEEE 802.11n HT20 Setting	17	17	17
IEEE 802.11ac VHT20 Setting	17	17	17
Frequency(MHz)	5755	5795	
IEEE 802.11n HT40 Setting	19	19	
IEEE 802.11ac VHT40 Setting	19	19	
Frequency(MHz)	5775		
IEEE 802.11ac VHT80 Setting	19		

Note: This information is provided by the applicant.


2.9. Duty Cycle of Test Signal

Temperature	24.5°C	Relative Humidity		52.1%	Test Voltage	AC 120V/60Hz
Mode	Frequency (MHz)	On time (ms)	Total Time (ms)	Duty Cycle (%)	Duty Factor (dB)	1/T (Hz)
IEEE 802.11a	5180	1.44348	1.51304	95.40	0.20	693
IEEE 802.11n HT20	5180	1.34783	1.43478	93.94	0.27	742
IEEE 802.11ac VHT20	5190	1.33913	1.41739	94.48	0.25	747
IEEE 802.11n HT40	5180	0.67826	0.74783	90.70	0.42	1474
IEEE 802.11ac VHT40	5190	0.67826	0.75652	89.66	0.47	1474
IEEE 802.11ac VHT80	5210	0.34783	0.42609	81.63	0.88	2875


Note:

1. Duty Cycle=On Time/Total Time×100%.
2. Duty Factor=10×Log(1/Duty Cycle).
3. If duty cycle <98 %, the conducted average output power and average power spectral density should be add duty factor.
4. If duty cycle ≥98 %,the EUT is consider to be transmitting continuously,the conducted average output power and average power spectral density no need to add duty factor.
5. The on-time time is transmission duration(T).
6. The VBW Setting is use for RMS measurement in unwanted emissions and band edge(Above 1GHz) test.


IEEE 802.11a 5180MHz

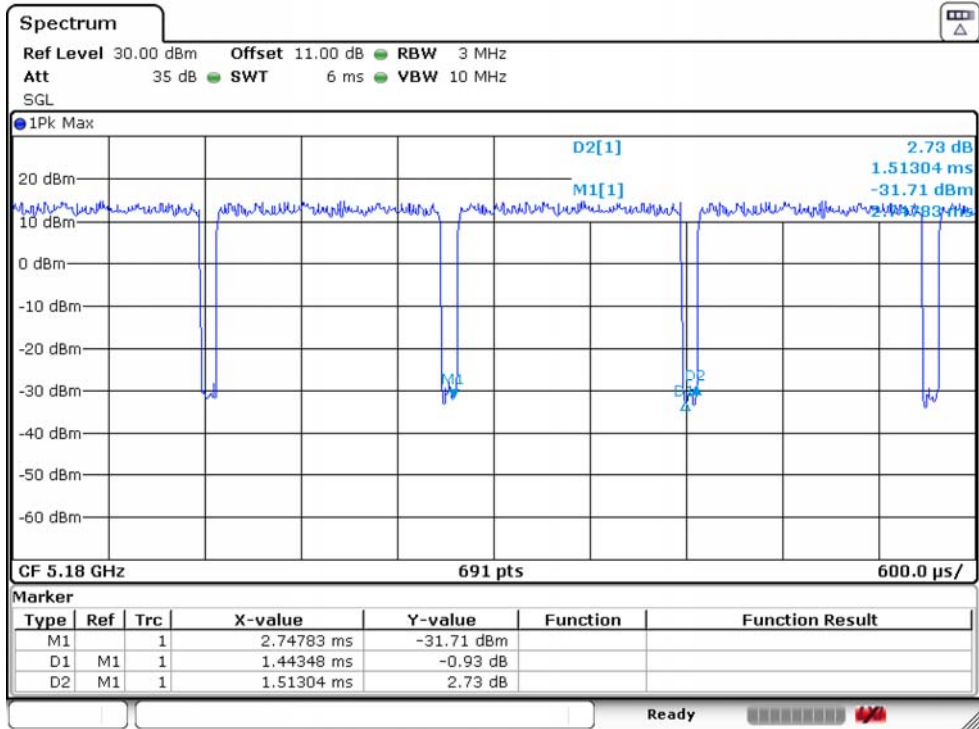


IEEE 802.11n HT20 5180MHz

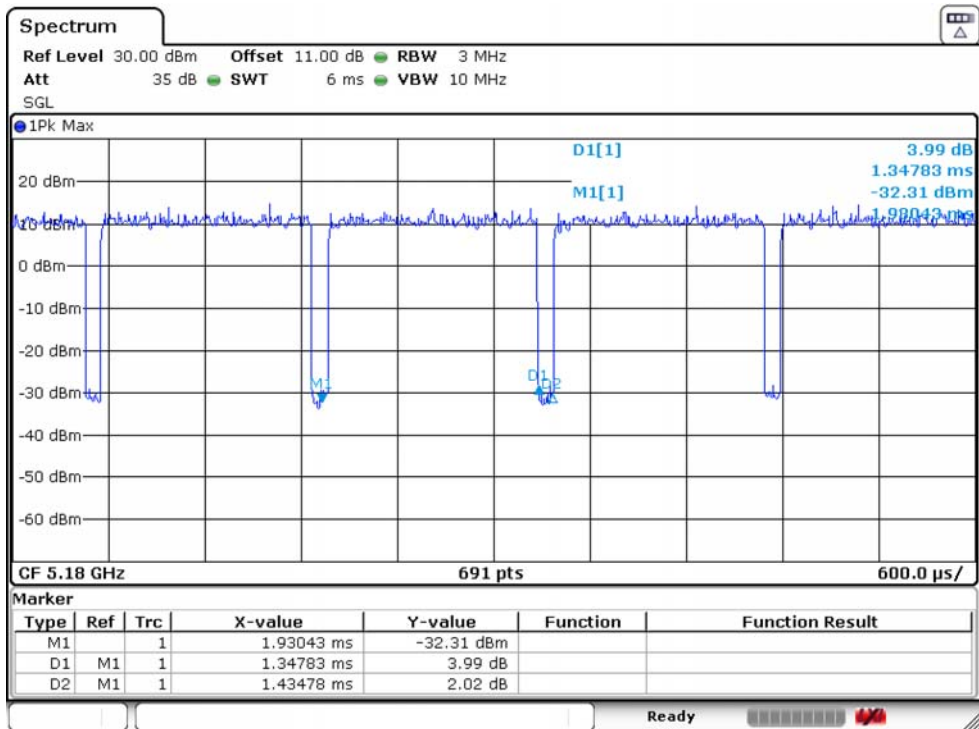


IEEE 802.11n HT40 5190MHz

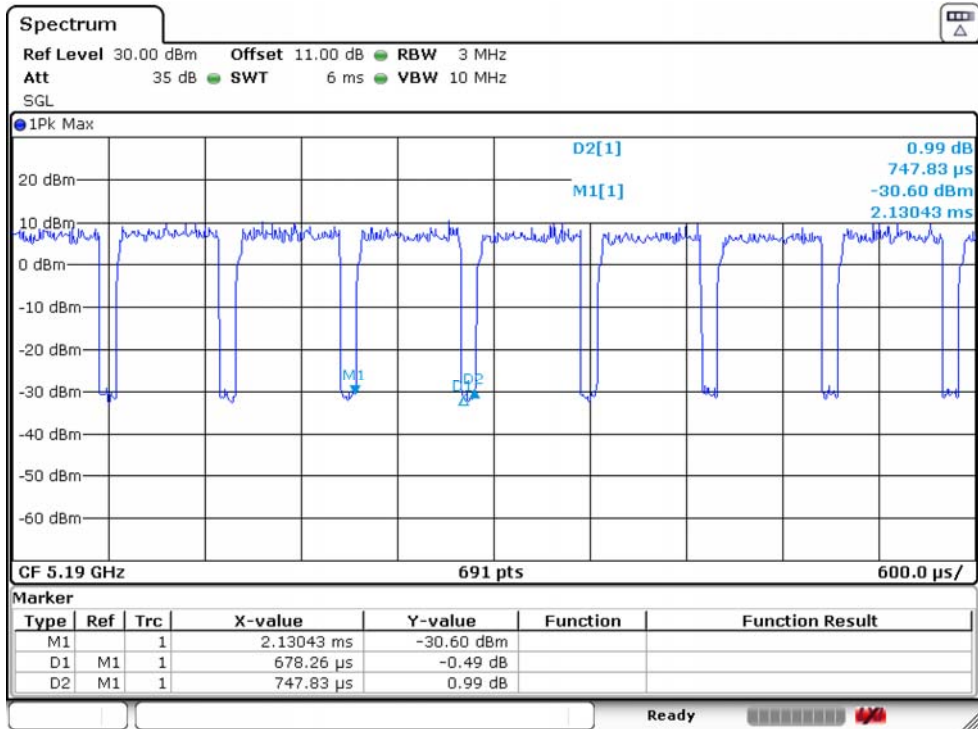


IEEE 802.11ac VHT20 5180MHz

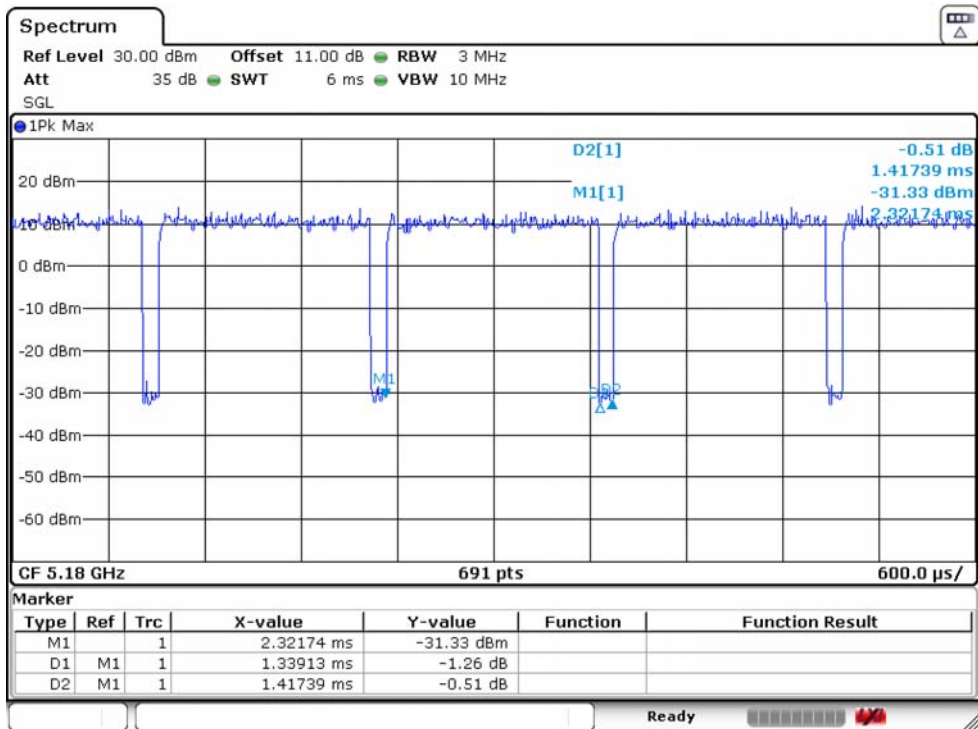

IEEE 802.11ac VHT40 5190MHz

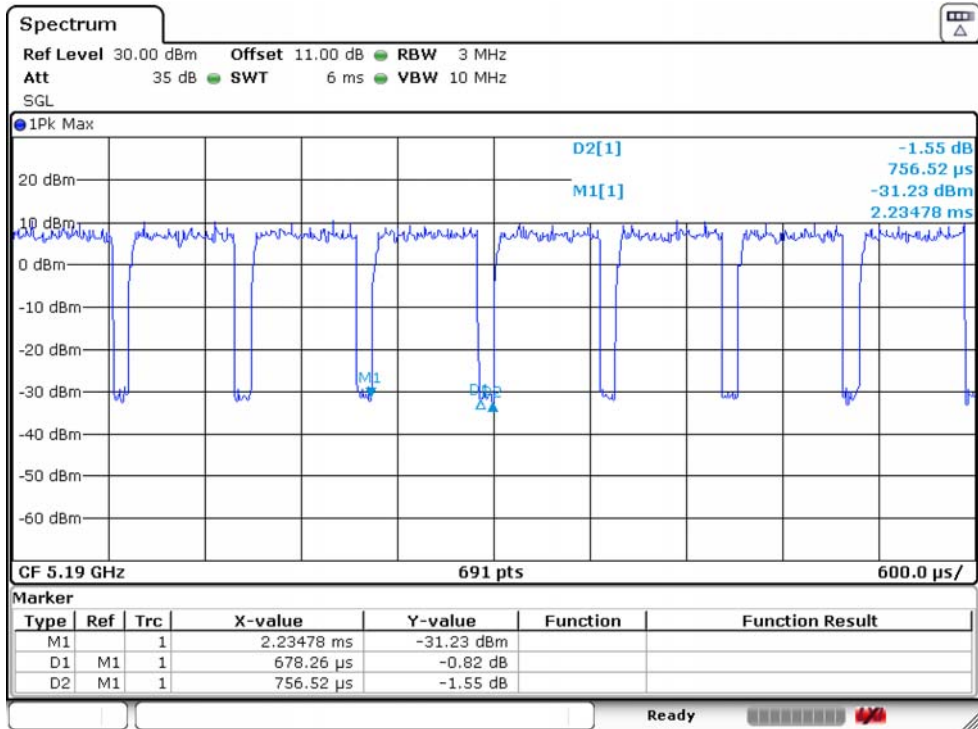

IEEE 802.11ac VHT80 5210MHz

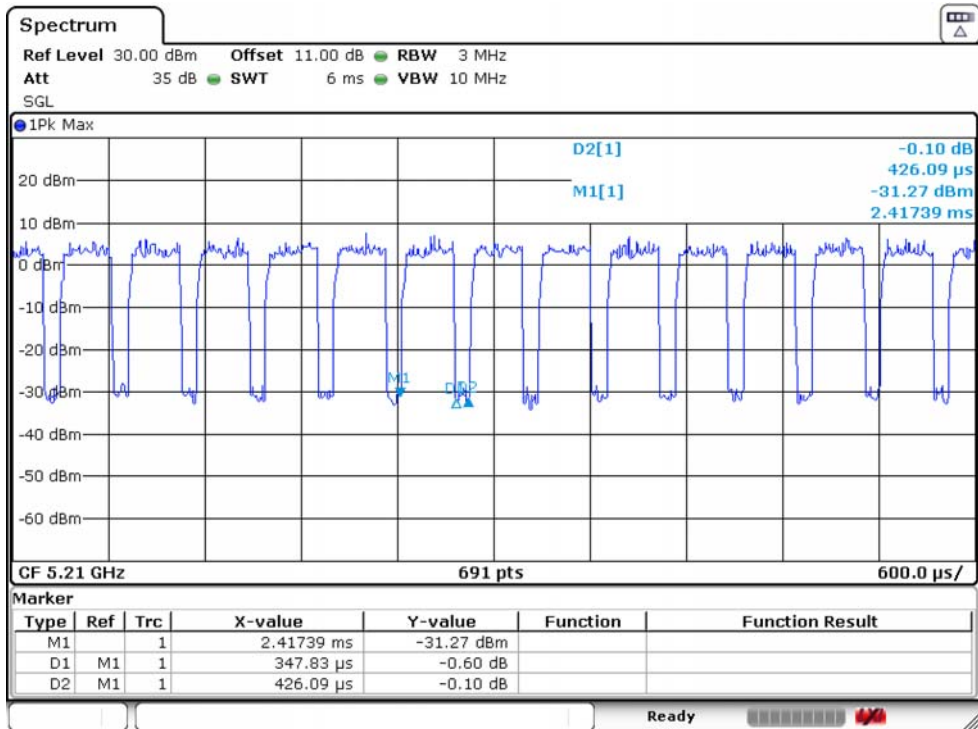

2.10. Test Equipment List

For AC power conducted emissions test						
Equipment	Manufacturer	Model No.	Serial No.	Calibration Body	Last Cal.	Next Cal.
EMI Test Receiver	Rohde & Schwarz	ESHS30	EST-E001	LISAI	June 13,21	1 Year
Artificial Mains Network	Rohde & Schwarz	ENV216	EST-E002	LISAI	June 13,21	1 Year
Pulse Limiter	Rohde & Schwarz	ESH3-Z2	EST-E078	LISAI	June 13,21	1 Year
Test Software	Audix	e3-6.111221a	N/A	N/A	N/A	N/A

For radiated emissions test(9KHz-30MHz)						
Equipment	Manufacturer	Model No.	Serial No.	Calibration Body	Last Cal.	Next Cal.
EMI Test Receiver	Rohde & Schwarz	ESR7	EST-E047	LISAI	June 13,21	1 Year
Active Loop Antenna	SCHWARZECK	FMZB 1519B	EST-E054	LISAI	June 13,21	1 Year
Test Software	Audix	e3-6.111221a	N/A	N/A	N/A	N/A
9kHz-30MHz Cable	N/A	EST-001	N/A	N/A	N/A	N/A

For radiated emissions test(30MHz-1000MHz)						
Equipment	Manufacturer	Model No.	Serial No.	Calibration Body	Last Cal.	Next Cal.
EMI Test Receiver	Rohde & Schwarz	ESR7	EST-E047	LISAI	June 13,21	1 Year
Bilog Antenna	Teseq	CBL 6111D	EST-E034	LISAI	June 13,21	1 Year
Test Software	Audix	e3-6.111221a	N/A	N/A	N/A	N/A
30-1000MHz Cable	N/A	EST-002	N/A	N/A	N/A	N/A

For radiated emissions test(Above 1000MHz)						
Equipment	Manufacturer	Model No.	Serial No.	Calibration Body	Last Cal.	Next Cal.
Horn Antenna	SCHWARZECK	BBHA 9120 D	EST-E031	LISAI	June 13,21	1 Year
Signal Amplifier	SCHWARZECK	BBV9718	EST-E032	LISAI	June 13,21	1 Year
Spectrum Analyzer	Rohde & Schwarz	FSV40	EST-E069	LISAI	July 19,21	1 Year
Test Software	Audix	e3-6.111221a	N/A	N/A	N/A	N/A
Above 1GHz Cable	N/A	EST-003	N/A	N/A	N/A	N/A

For connect EUT antenna terminal test						
Equipment	Manufacturer	Model No.	Serial No.	Calibration Body	Last Cal.	Next Cal.
TS 8997	Rohde & Schwarz	/	/	/	/	/
Open Switch and Control Unit	Rohde & Schwarz	OSP-B157WB	EST-E036	LISAI	June 13,21	1 Year
Signal and Spectrum Analyzer	Rohde & Schwarz	FSV	EST-E037	LISAI	June 13,21	1 Year
Signal Generator	Rohde & Schwarz	SMB100A	EST-E038	LISAI	June 13,21	1 Year
Vector Signal Generator	Rohde & Schwarz	SMBV100A	EST-E039	LISAI	June 13,21	1 Year
Test Software	Rohde & Schwarz	WMS32	V10.50.00	N/A	N/A	N/A
Temperature controller	Terchy	MHQ	EST-E101	LISAI	June 13,21	1 Year

3. 6dB BANDWIDTH & 26dB BANDWIDTH & 99% OCCUPIED BANDWIDTH

3.1. Limit

Band	Frequency (MHz)	Test Item	Limit
U-NII-1	5150-5250	26dB Bandwidth&99% Occupied Bandwidth	N/A
U-NII-2A	5250-5350	26dB Bandwidth&99% Occupied Bandwidth	N/A
U-NII-2C	5470-5725	26dB Bandwidth&99% Occupied Bandwidth	N/A
U-NII-3	5725-5850	6dB Bandwidth&99% Occupied Bandwidth	6dB Bandwidth \geq 500KHz

3.2. Test Setup



3.3. Spectrum Analyzer Setting

6dB Bandwidth	
Spectrum Parameters	Setting
RBW	100KHz
VBW	300KHz
Span	40MHz(20MHz Bandwidth mode) 60MHz(40MHz Bandwidth mode) 120MHz(80MHz Bandwidth mode)
Sweep Time	Auto
Detector	Peak
Trace Mode	Max Hold

26dB Bandwidth	
Spectrum Parameters	Setting
RBW	approximately 1% of the emission bandwidth
VBW	>RBW
Span	40MHz(20MHz Bandwidth mode) 60MHz(40MHz Bandwidth mode) 120MHz(80MHz Bandwidth mode)
Sweep Time	Auto
Detector	Peak
Trace Mode	Max Hold

99% Occupied Bandwidth	
Spectrum Parameters	Setting
RBW	1% to 5% of the OBW
VBW	approximately three times the RBW
Span	between 1.5 times and 5.0 times the OBW
Sweep Time	Auto
Detector	Peak
Trace Mode	Max Hold

3.4. Test Procedure

For 26dB Bandwidth Measurement :

- a. Connect EUT antenna terminal to the spectrum analyzer with RF cable.
- b. Spectrum analyzer setting parameters in accordance with section 3.3.
- c. Set the EUT transmit continuously with maximum output power.
- d. Allow trace to stabilize, measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the instrument. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.
- e. Repeat above procedures until all modes and channels were measured.
- f. Record the results in the test report.

For 6dB Bandwidth Measurement :

- a. Connect EUT antenna terminal to the spectrum analyzer with RF cable.
- b. Spectrum analyzer setting parameters in accordance with section 3.3.
- c. Set the EUT transmit continuously with maximum output power.
- d. Allow trace to stabilize, measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.
- e. Repeat above procedures until all modes and channels were measured.
- f. Record the results in the test report.

For 99% Occupied Bandwidth Measurement :

- a. Connect EUT antenna terminal to the spectrum analyzer with RF cable.
- b. Spectrum analyzer setting parameters in accordance with section 3.3.
- c. Set the EUT transmit continuously with maximum output power.
- d. Allow trace to stabilize, use the 99% power bandwidth function to measure bandwidth.
- e. Repeat above procedures until all modes and channels were measured.
- f. Record the results in the test report.

3.5. Test Result

Temperature	25°C	Relative Humidity	51%	Test Voltage	AC 120V/60Hz	
26dB Bandwidth&99% Occupied Bandwidth						
AND	Test Mode	Fre (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Calculate Power Limit (W)	Calculate Power Limit (dBm)
U-NII-1	IEEE 802.11a	5180	21.708	16.9183		
		5200	21.534	16.9783		
		5240	21.592	17.0063		
	IEEE 802.11n HT20	5180	21.708	18.1942		
		5200	21.592	18.1182		
		5240	21.766	18.1182		
	IEEE 802.11ac VHT20	5180	21.534	17.9450		
		5200	21.650	18.0608		
		5240	21.708	18.1187		
	IEEE 802.11n HT40	5190	40.290	36.8162		
		5230	40.290	36.8162		
	IEEE 802.11ac VHT40	5190	40.410	36.8162		
		5230	40.290	36.7000		
	IEEE 802.11ac VHT80	5210	81.740	75.7164		


Temperature	24.5°C	Relative Humidity	52.1%	Test Voltage	AC 120V/60Hz	
6dB Bandwidth&99% Occupied Bandwidth						
BAND	Test Mode	Fre (MHz)	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	6dB BW Min Limit (MHz)	Result
U-NII-3	IEEE 802.11a	5745	16.3104	16.9983	0.5	PASS
		5785	16.3064	17.0223	0.5	PASS
		5825	16.3104	16.8943	0.5	PASS
	IEEE 802.11n HT20	5745	17.5502	18.1942	0.5	PASS
		5785	17.5502	18.1182	0.5	PASS
		5825	17.5462	18.1102	0.5	PASS
	IEEE 802.11ac VHT20	5745	17.5582	18.1187	0.5	PASS
		5785	17.5342	18.0029	0.5	PASS
		5825	17.3183	18.0608	0.5	PASS
	IEEE 802.11n HT40	5755	36.0604	36.8162	0.5	PASS
		5795	36.0604	36.8162	0.5	PASS
	IEEE 802.11ac VHT40	5755	36.2844	36.8162	0.5	PASS
		5795	36.0684	36.8162	0.5	PASS
	IEEE 802.11ac VHT80	5775	75.1760	75.4848	0.5	PASS

Note :

For Band U-NII-2A and U-NII-2C, the maximum conducted output power limit is 250mw or $11+10 \times \text{Log B}$, which is lesser, where B is the 26dB Bandwidth in MHz. So in this section, the maximum conducted output power limit can calculate with 26dB Bandwidth.

Note: Ant1 and ANT2 both have tests, and the report only shows the data for the worst case Ant1.


3.6. Test Result

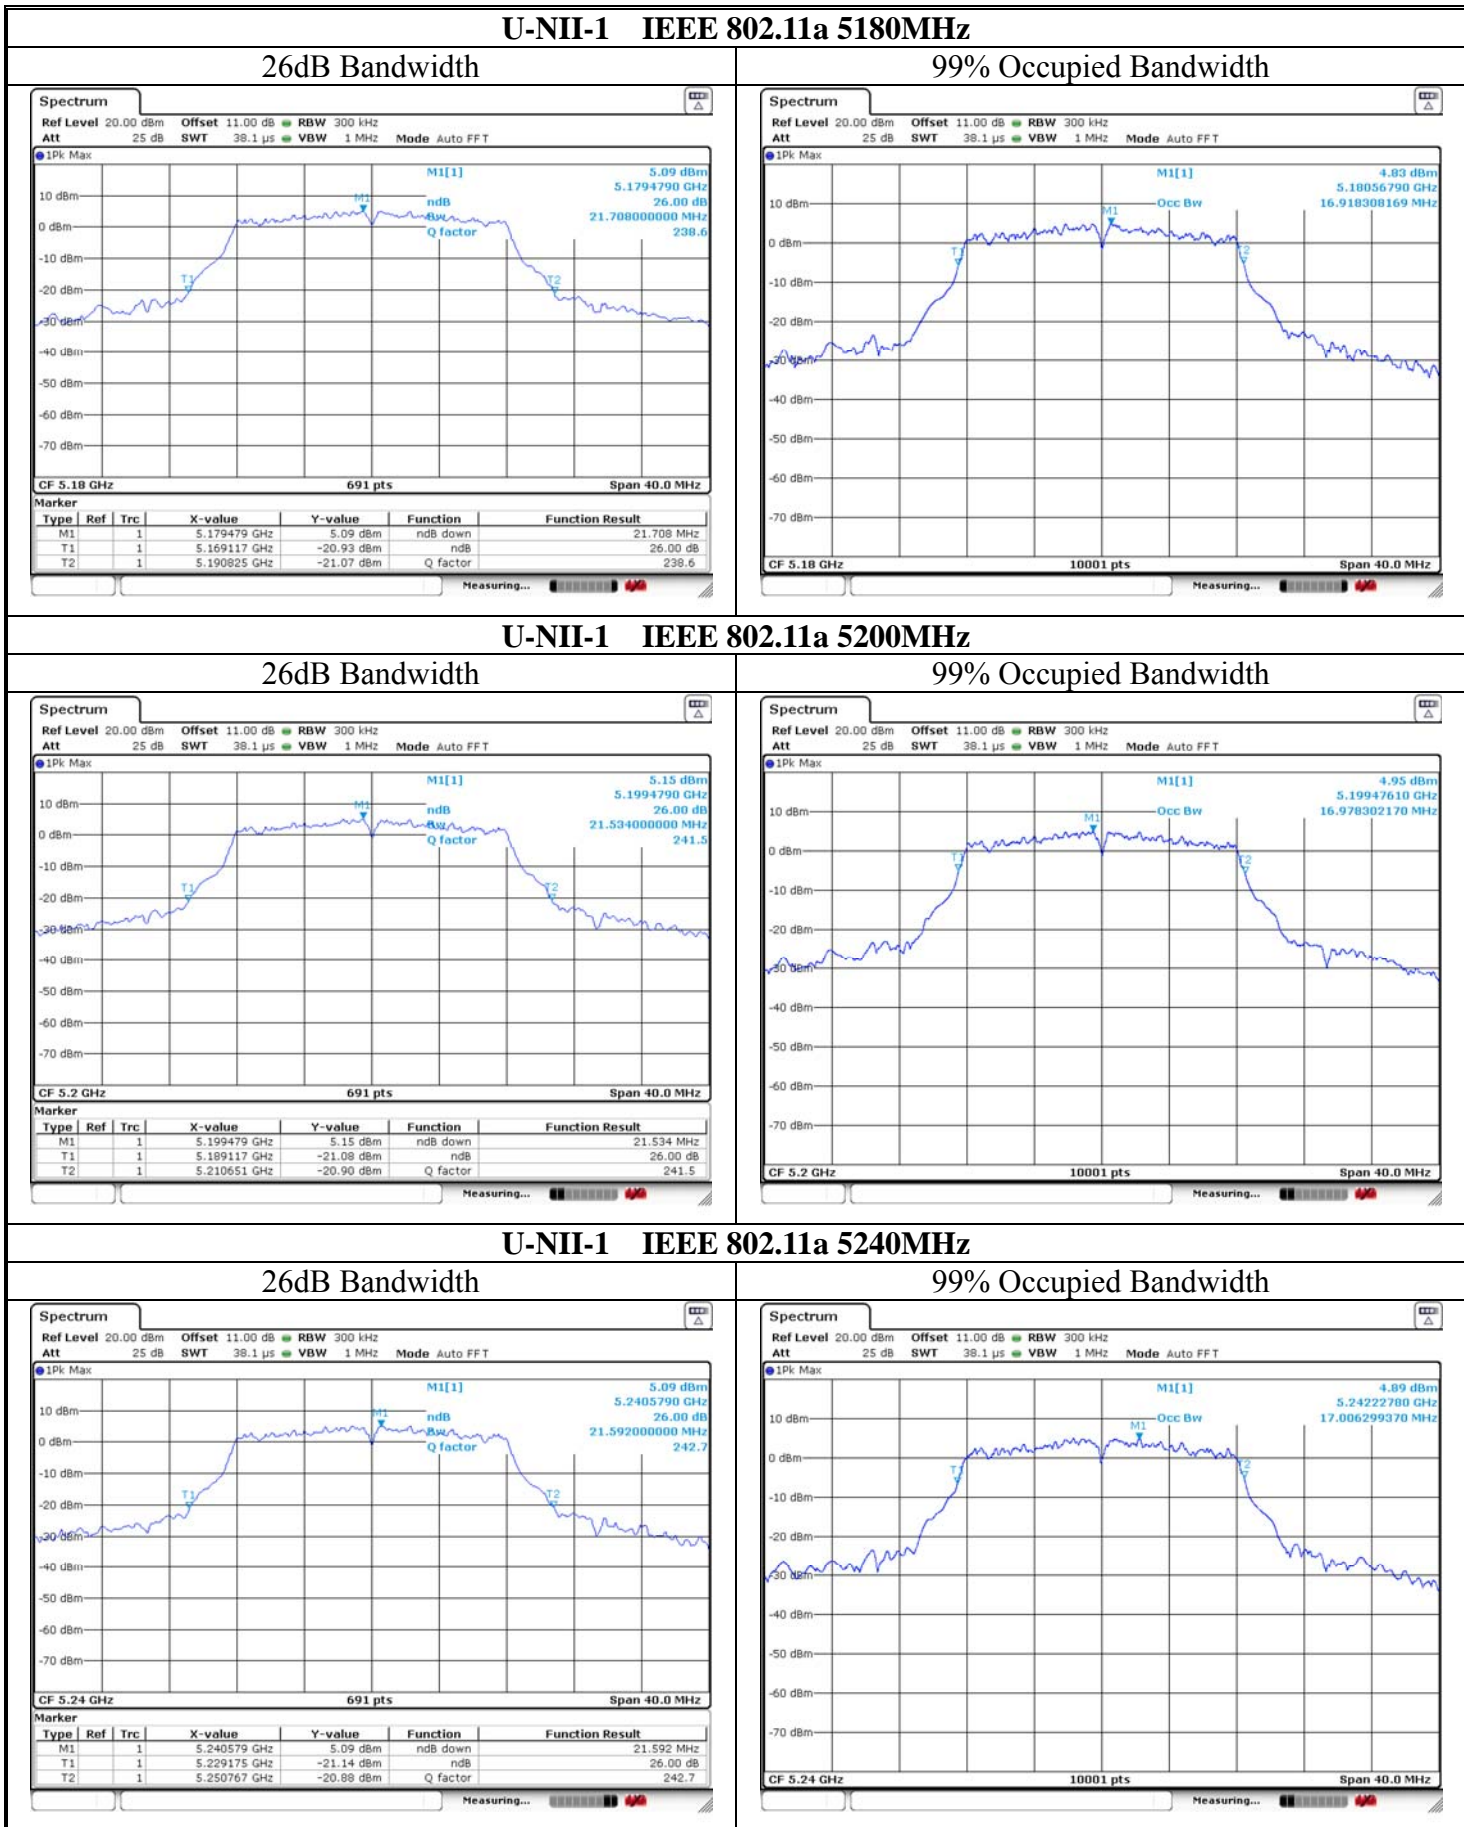

U-NII-1 IEEE 802.11n HT20 5180MHz

26dB Bandwidth



99% Occupied Bandwidth

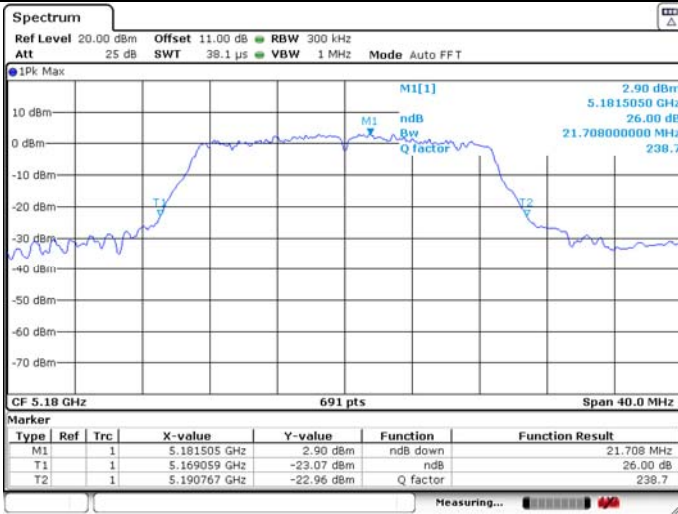

U-NII-1 IEEE 802.11n HT20 5200MHz

26dB Bandwidth



99% Occupied Bandwidth

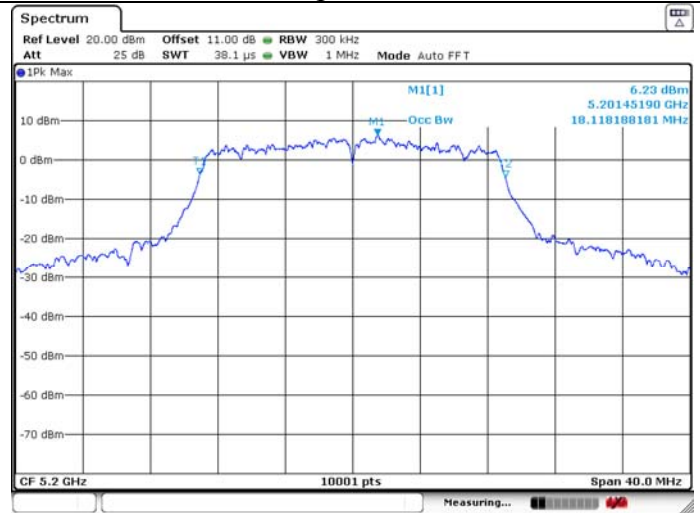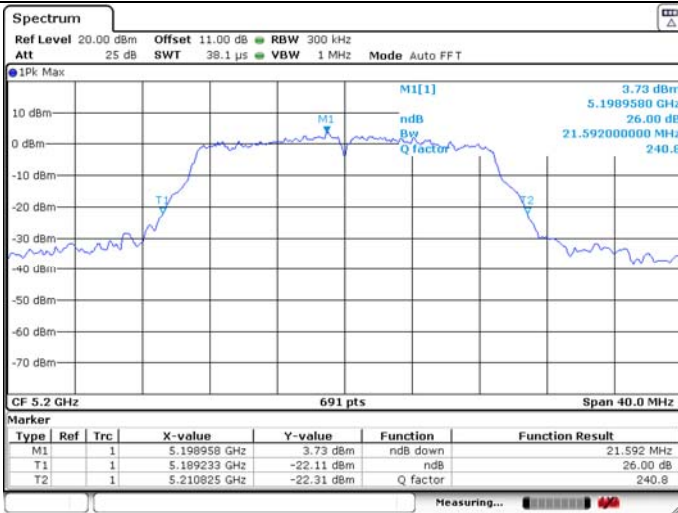

U-NII-1 IEEE 802.11n HT20 5240MHz

26dB Bandwidth

99% Occupied Bandwidth

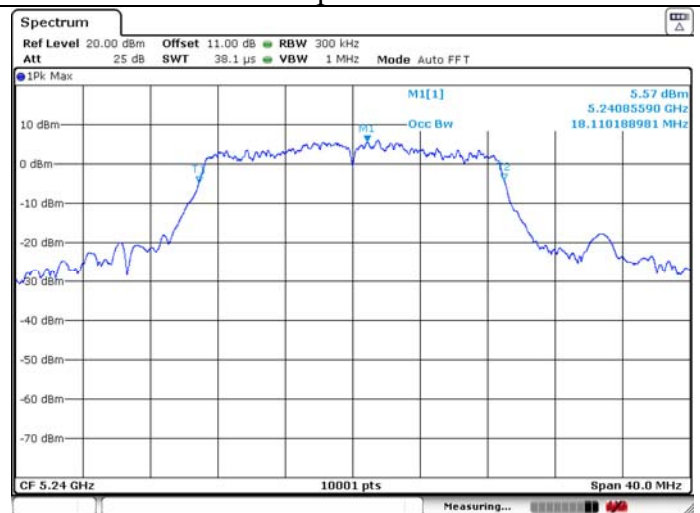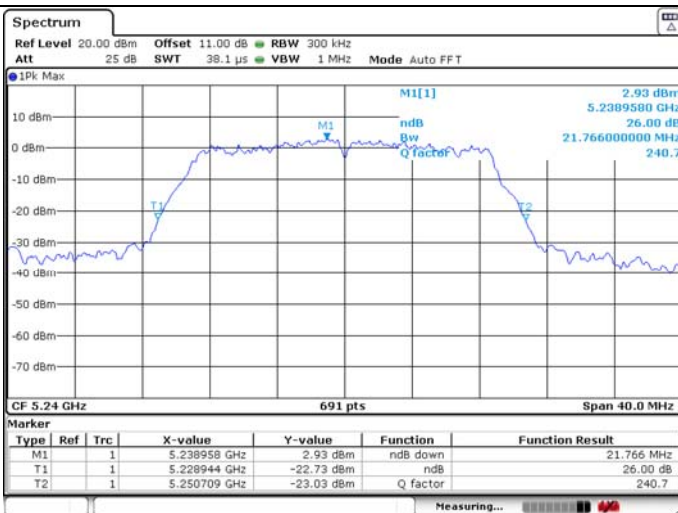

U-NII-1 IEEE 802.11ac VHT20 5180MHz

26dB Bandwidth


99% Occupied Bandwidth



U-NII-1 IEEE 802.11ac VHT20 5200MHz

26dB Bandwidth


99% Occupied Bandwidth

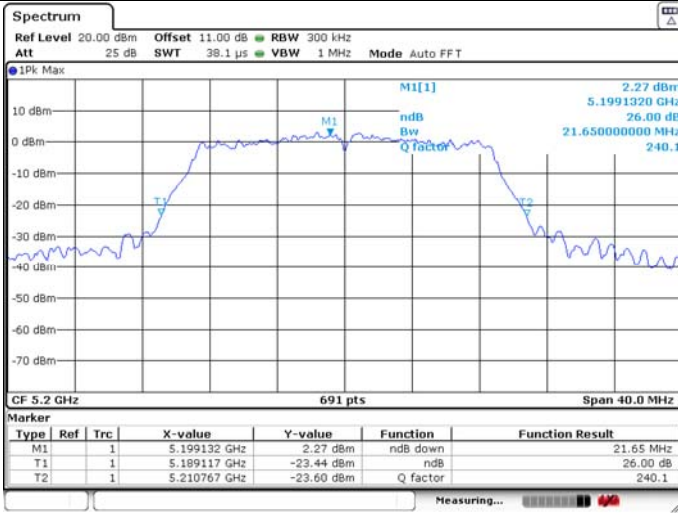

U-NII-1 IEEE 802.11ac VHT20 5240MHz

26dB Bandwidth



99% Occupied Bandwidth

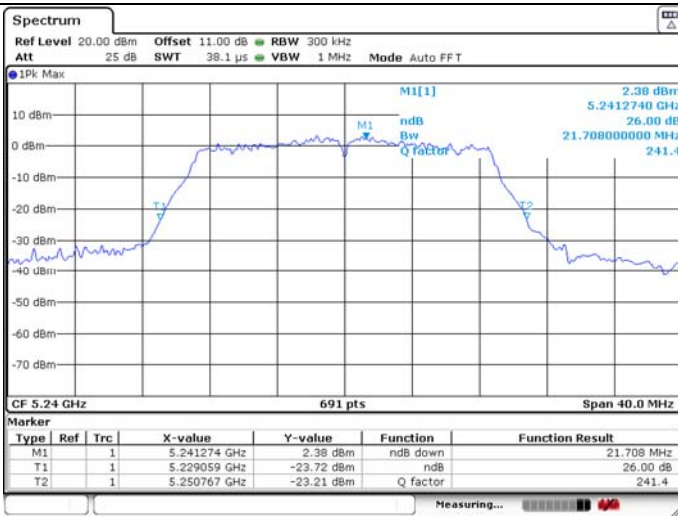

U-NII-1 IEEE 802.11n HT40 5190MHz

26dB Bandwidth


99% Occupied Bandwidth

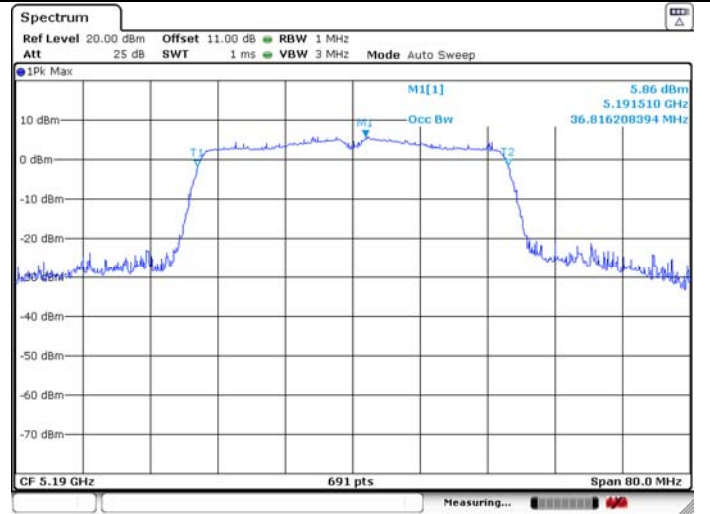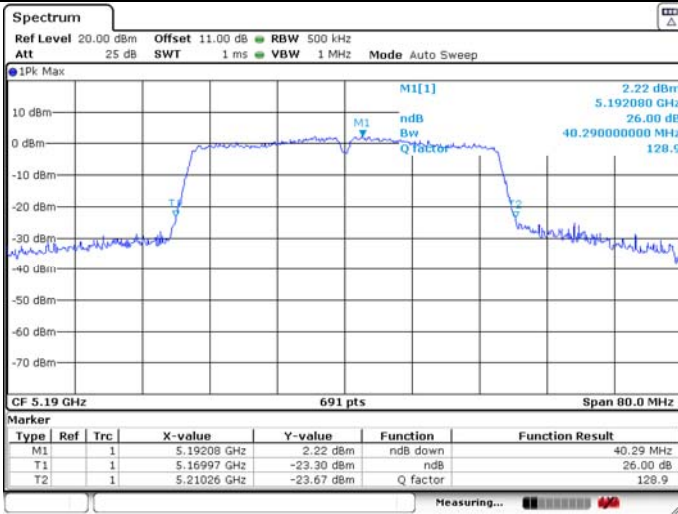

U-NII-1 IEEE 802.11n HT40 5230MHz

26dB Bandwidth



99% Occupied Bandwidth

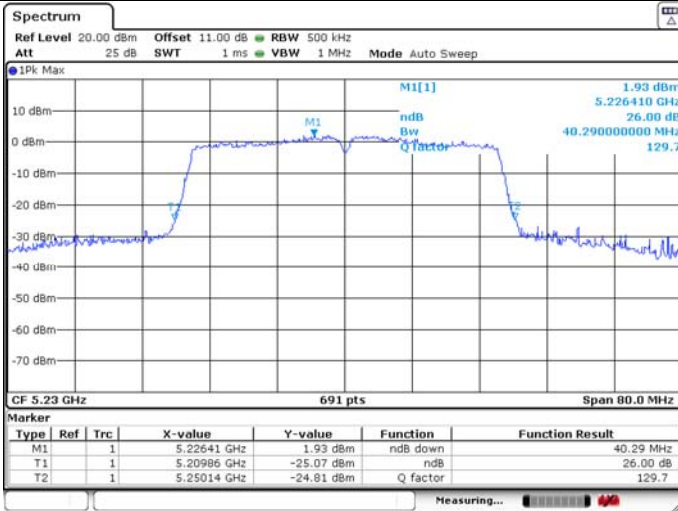

U-NII-1 IEEE 802.11ac VHT40 5190MHz

26dB Bandwidth



99% Occupied Bandwidth

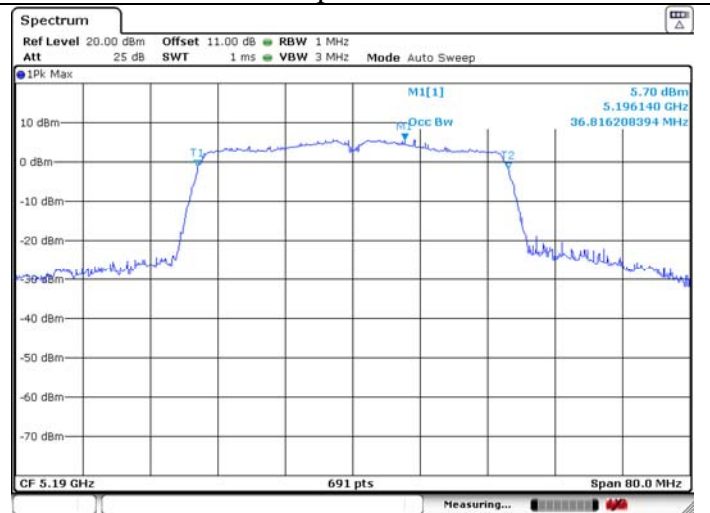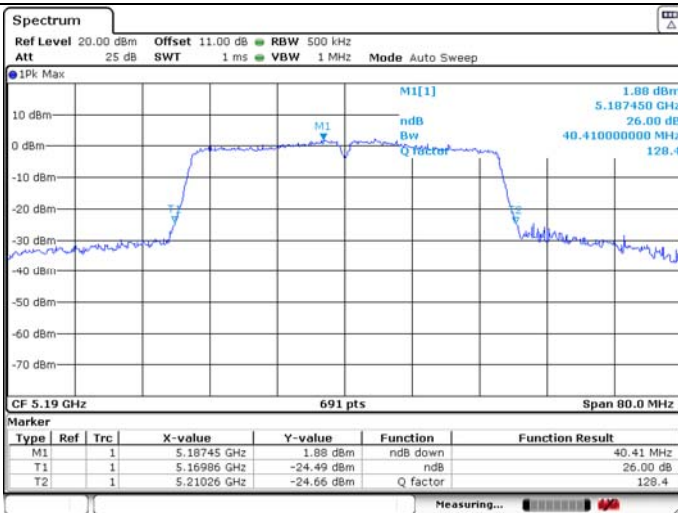

U-NII-1 IEEE 802.11ac VHT40 5230MHz

26dB Bandwidth



99% Occupied Bandwidth

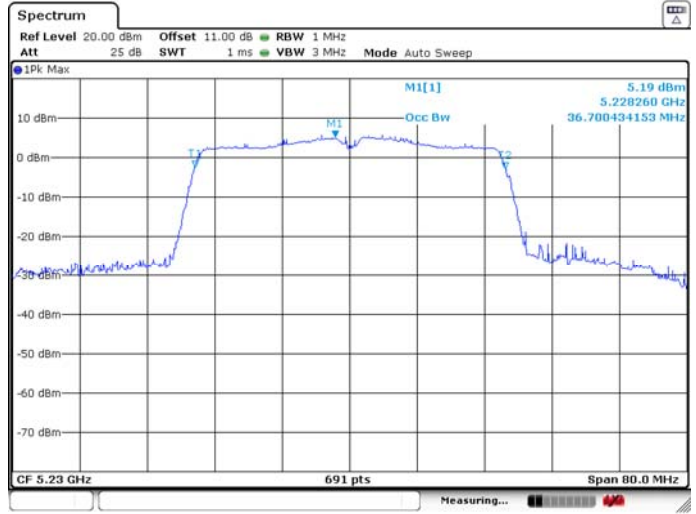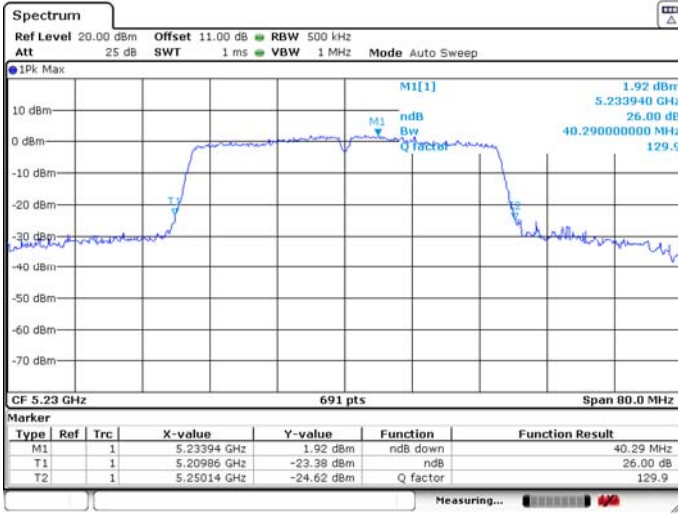

U-NII-1 IEEE 802.11ac VHT80 5210MHz

26dB Bandwidth


99% Occupied Bandwidth

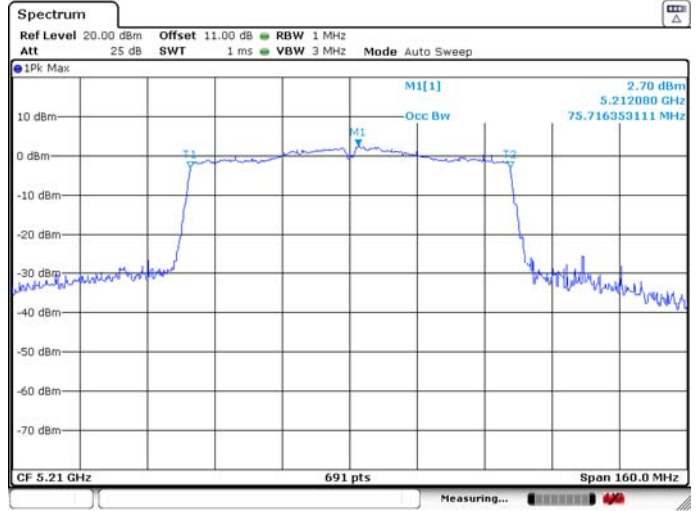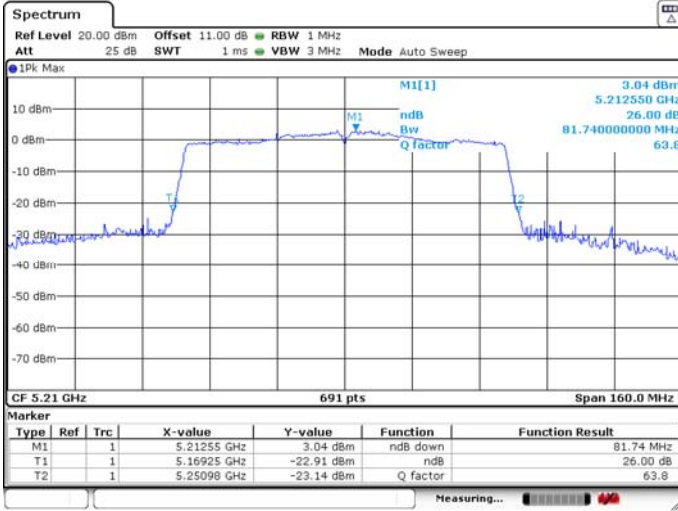

U-NII-3 IEEE 802.11a 5745MHz

6dB Bandwidth



99% Occupied Bandwidth

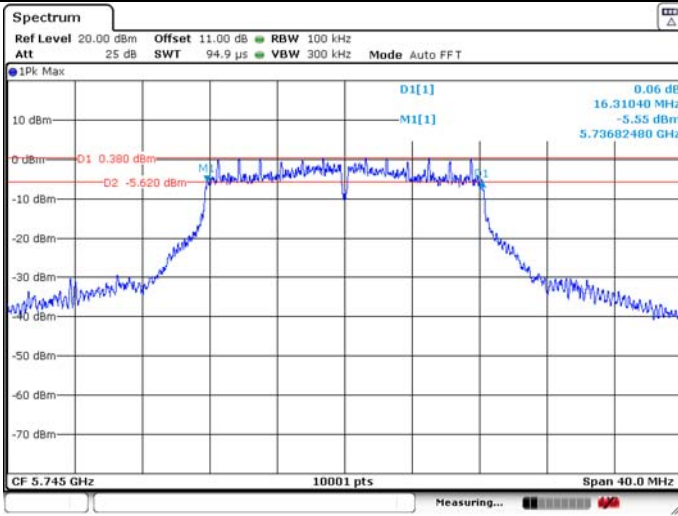

U-NII-3 IEEE 802.11a 5785MHz

6dB Bandwidth



99% Occupied Bandwidth

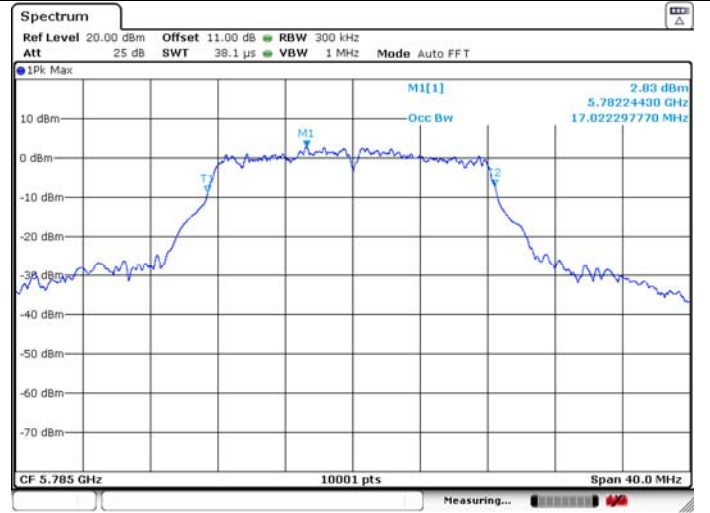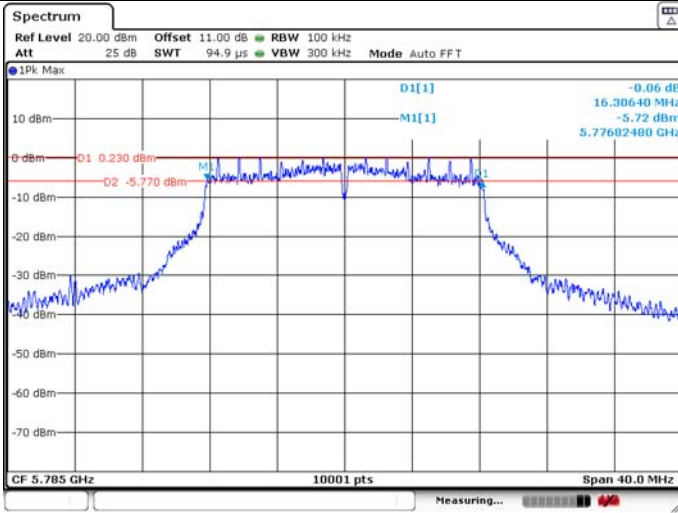

U-NII-3 IEEE 802.11a 5825MHz

6dB Bandwidth



99% Occupied Bandwidth

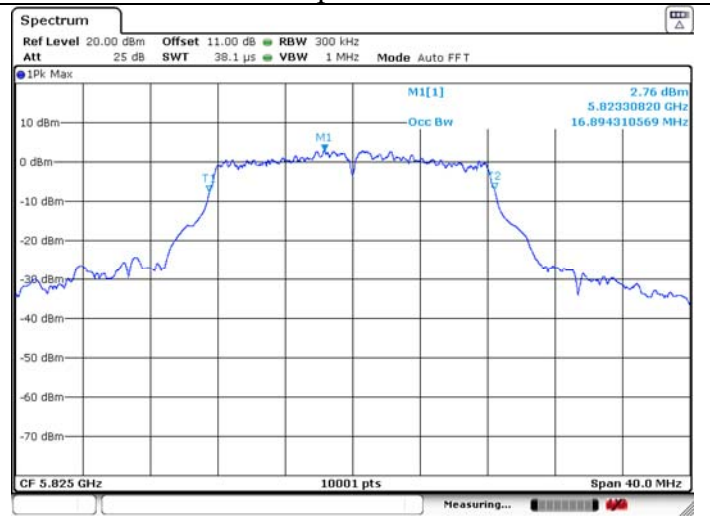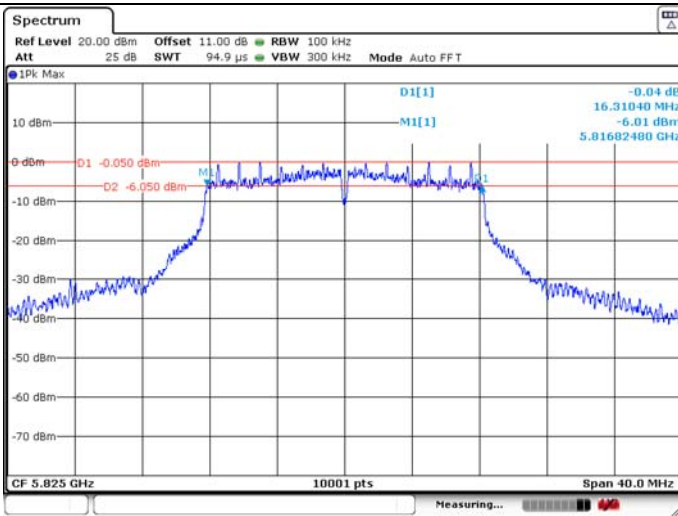

U-NII-3 IEEE 802.11n HT20 5745MHz

6dB Bandwidth



99% Occupied Bandwidth

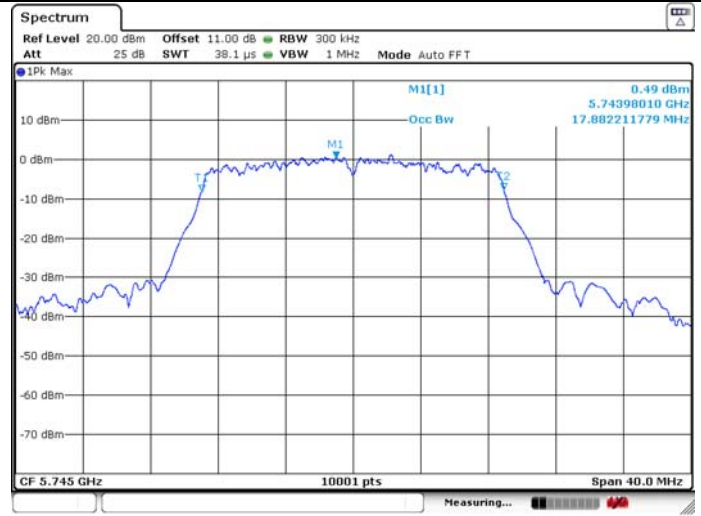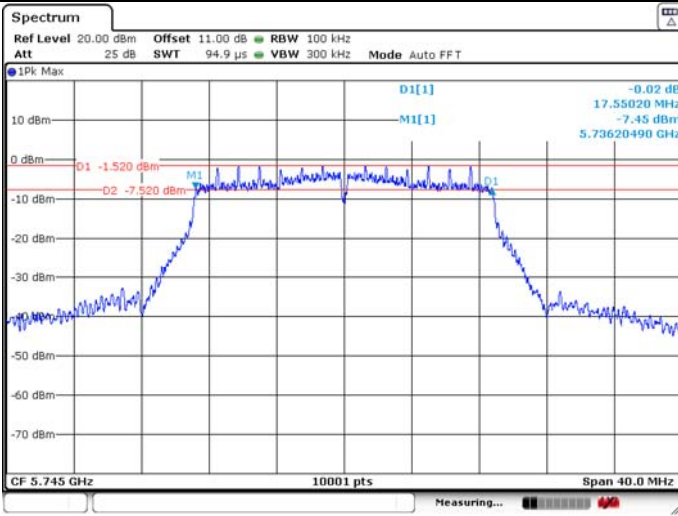

U-NII-3 IEEE 802.11n HT20 5785MHz

6dB Bandwidth



99% Occupied Bandwidth

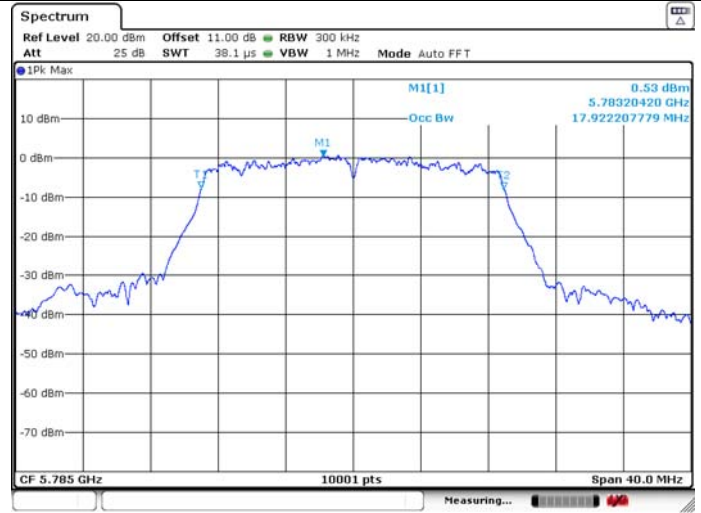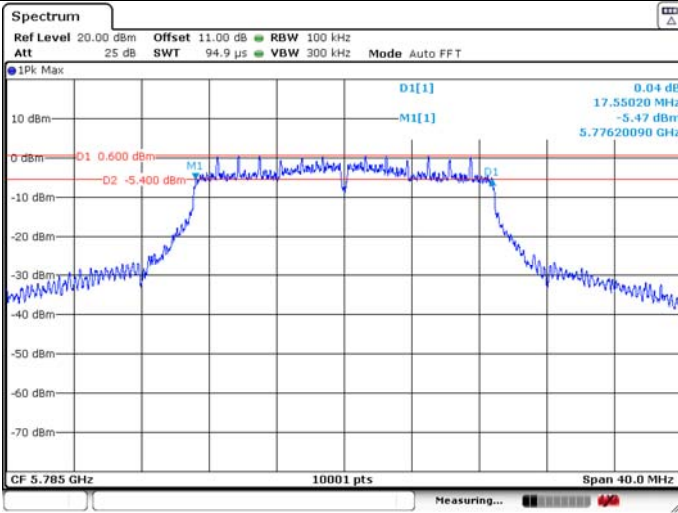

U-NII-3 IEEE 802.11n HT20 5825MHz

6dB Bandwidth


99% Occupied Bandwidth

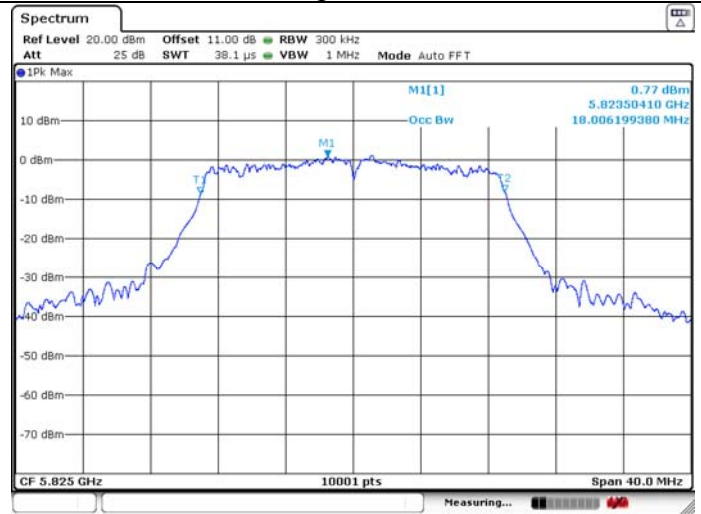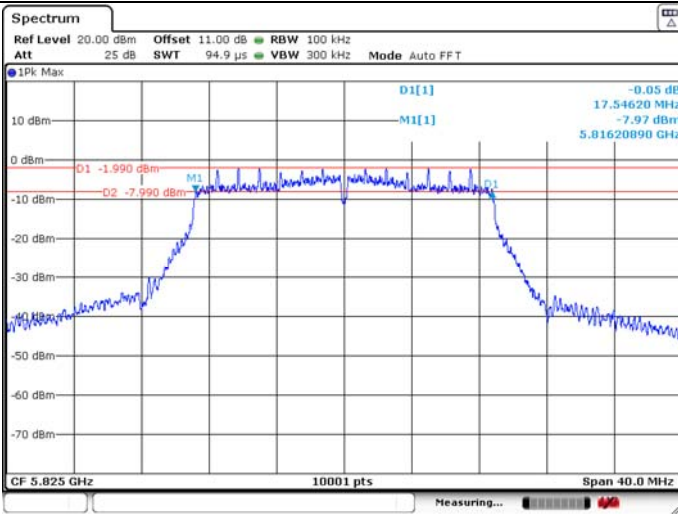

U-NII-3 IEEE 802.11ac VHT20 5745MHz

6dB Bandwidth


99% Occupied Bandwidth

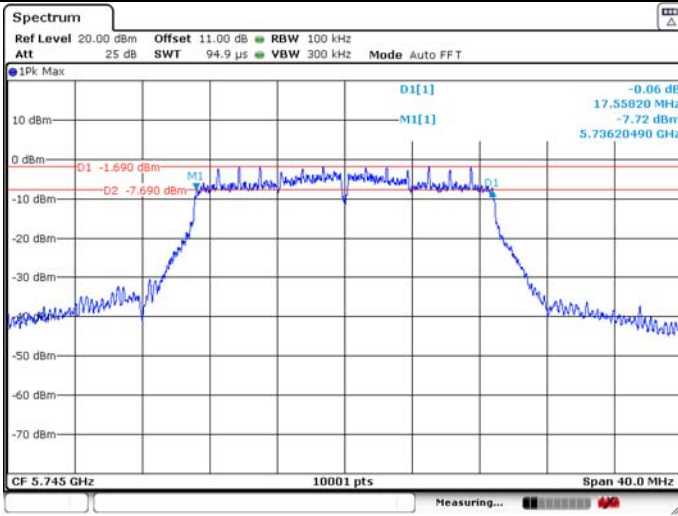

U-NII-3 IEEE 802.11ac VHT20 5785MHz

6dB Bandwidth


99% Occupied Bandwidth

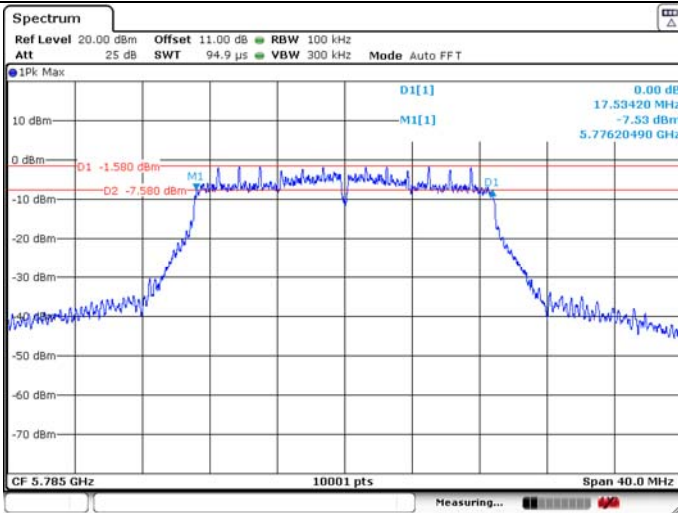

U-NII-3 IEEE 802.11ac VHT20 5825MHz

6dB Bandwidth



99% Occupied Bandwidth

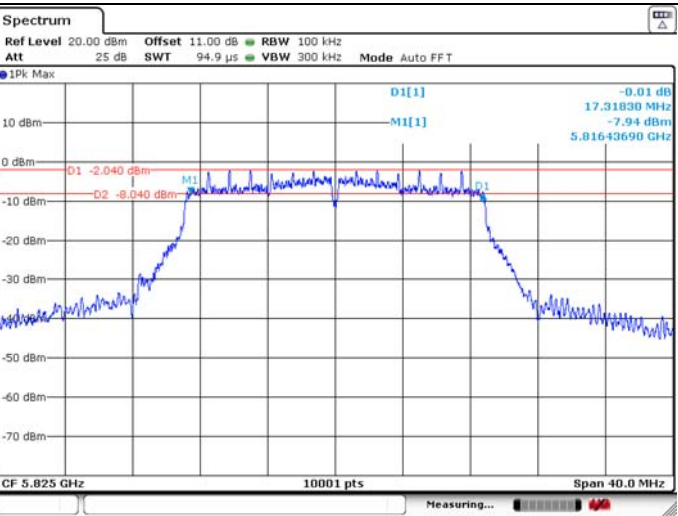

U-NII-3 IEEE 802.11n HT40 5755MHz

6dB Bandwidth



99% Occupied Bandwidth

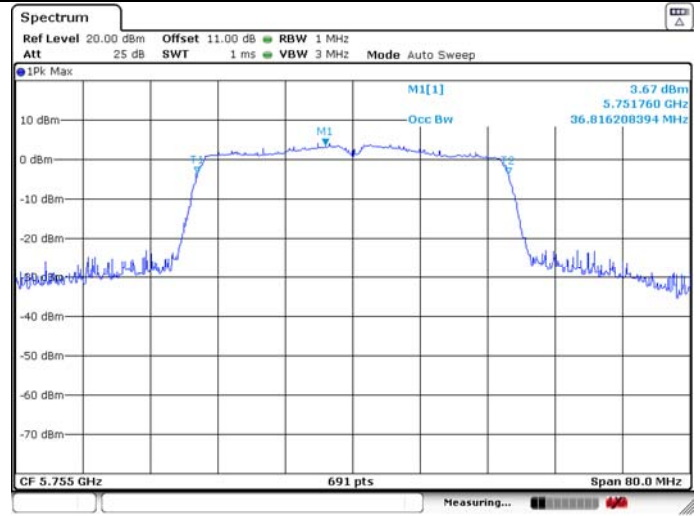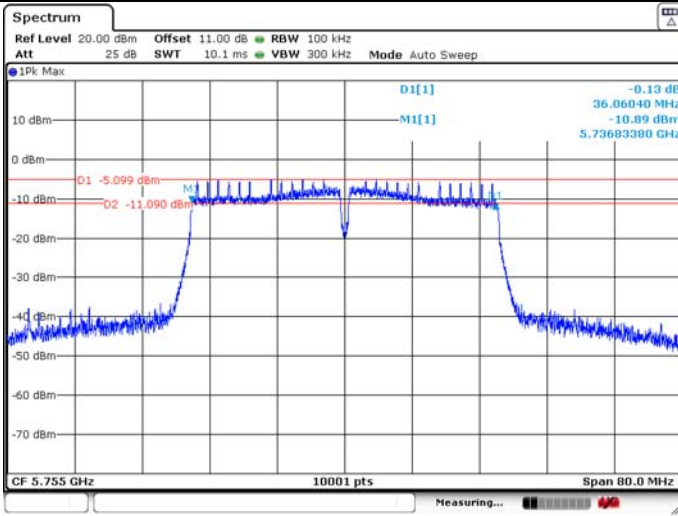

U-NII-3 IEEE 802.11n HT40 5795MHz

6dB Bandwidth



99% Occupied Bandwidth

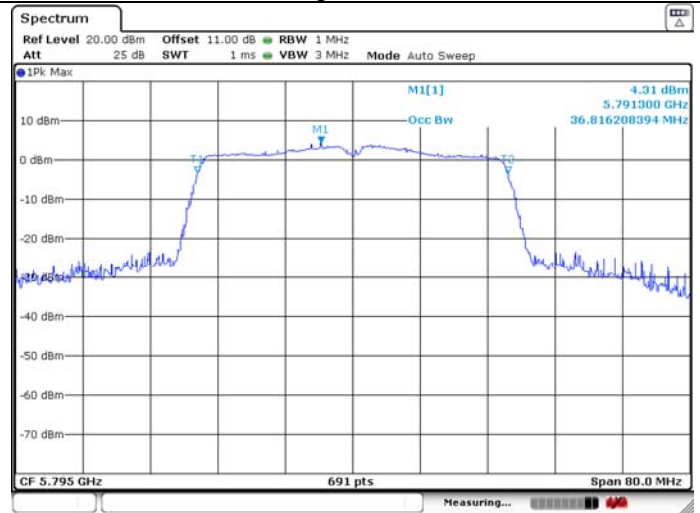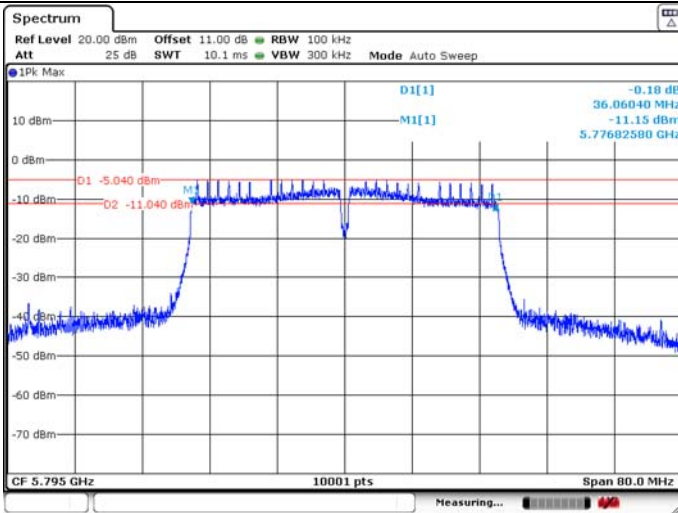

U-NII-3 IEEE 802.11ac VHT40 5755MHz

6dB Bandwidth



99% Occupied Bandwidth

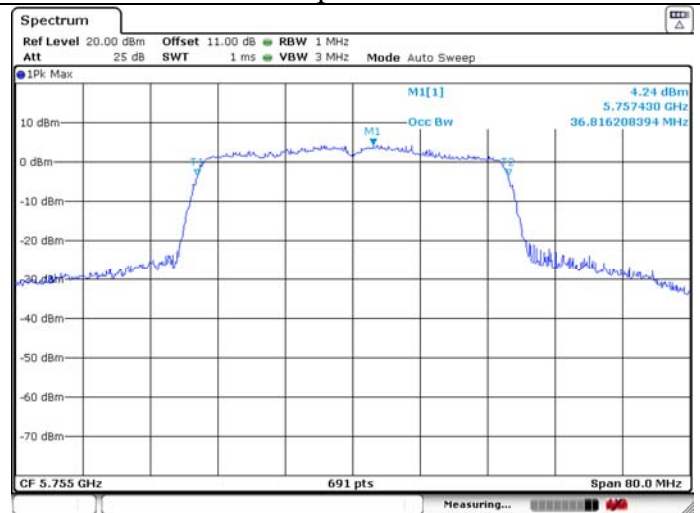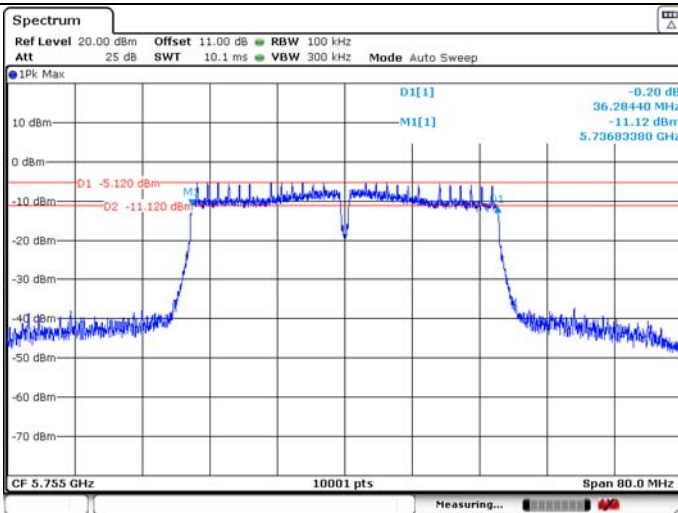

U-NII-3 IEEE 802.11ac VHT40 5795MHz

6dB Bandwidth


99% Occupied Bandwidth

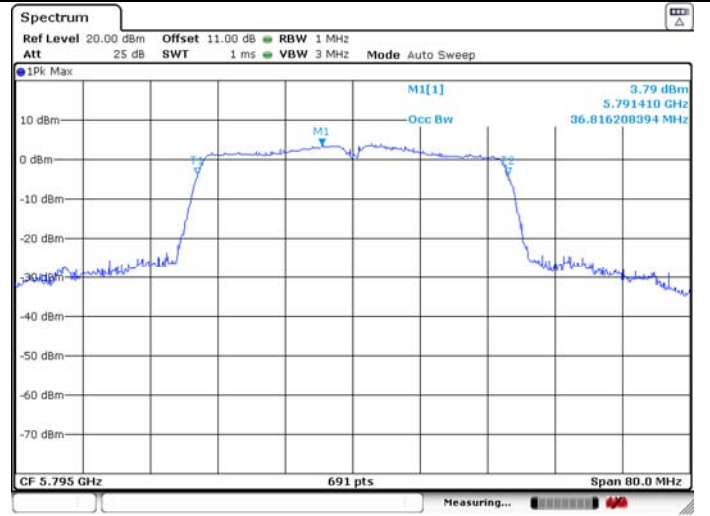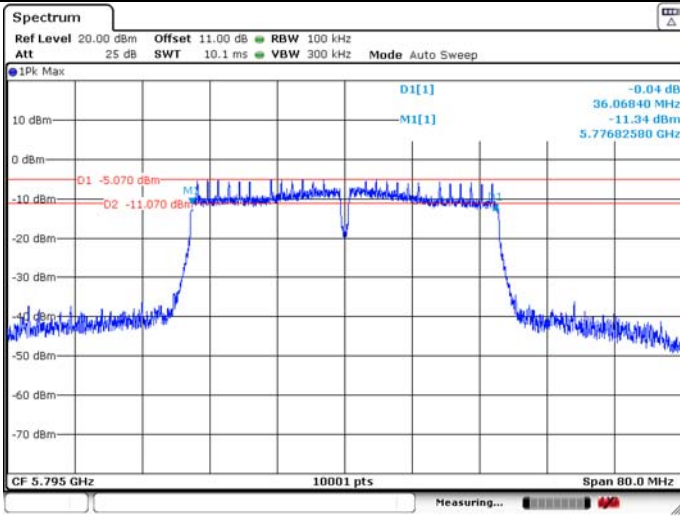

U-NII-3 IEEE 802.11ac VHT80 5775MHz

6dB Bandwidth

99% Occupied Bandwidth

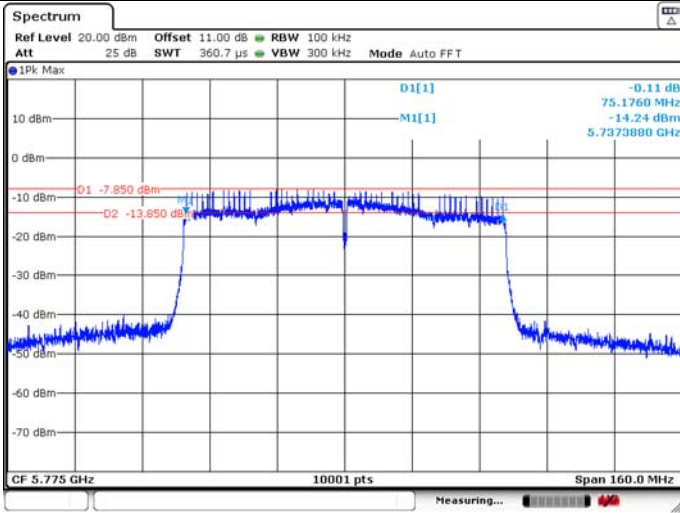

4. MAXIMUM CONDUCTED OUTPUT POWER


4.1. Limit

Band	EUT Type	Limit
U-NII-1	Outdoor Access Point	1W(30dBm) (Max. e.i.r.p \leq 125mW at any elevation angle above 30 degrees as measured from the horizon)
	Indoor Access Point	1W(30dBm)
	Fixed point-to-point Access Point	1W(30dBm)
	Mobile and Portable Client Device	250mW(23.98dBm)
U-NII-2A	All Device	250mW(23.98dBm) or 11dBm+10 log B, Which is lesser. (B is 26dB Bandwidth in MHz)
U-NII-2C	All Device	250mW(23.98dBm) or 11dBm+10 log B, Which is lesser. (B is 26dB Bandwidth in MHz)
U-NII-3	All Device	1W(30dBm)

Note:

For the Band U-NII-2A and U-NII-2C, the maximum conducted output power limit calculate result refer to section 3.5.

4.2. Test Setup

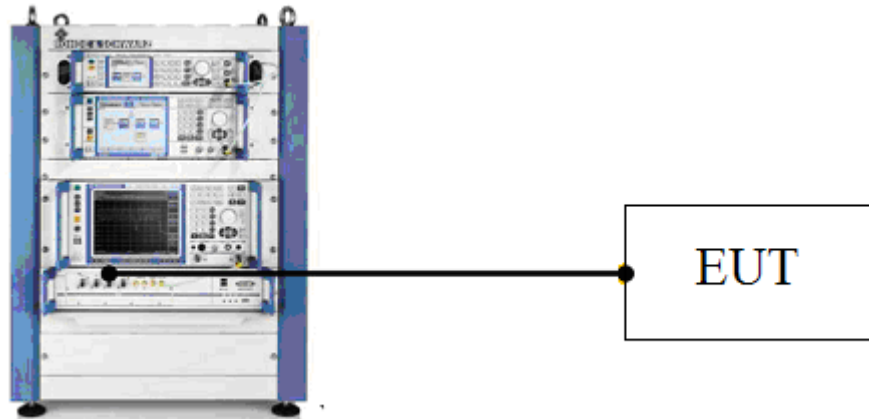

4.3. Test Procedure

- a. Connect EUT antenna terminal to the OSP-B157WB with RF cable.
- b. Set the EUT transmit continuously with maximum output power.
- c. Through the test software in TS8897 to control a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Because the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.
- d. Repeat above procedures until all modes and channels were measured.
- e. Record the results in the test report.

4.4. Test Result

Temperature	24.5°C	Relative Humidity			52.1%	Test Voltage		AC 120V/60Hz
BAND	Test Mode	Fre (MHz)	Conducted AVG Output Power (dBm)		Total Conducted Output Power (W)	Total Conducted Output Power (dBm)	Limit (dBm)	Result
			Ant 1	Ant 2				
U-NII-1	IEEE 802.11a	5180	17.202	16.646			23.98	PASS
		5200	17.617	17.141			23.98	PASS
		5240	18.051	18.131			23.98	PASS
	IEEE 802.11n HT20	5180	12.097	11.525	0.0304	14.831	23.98	PASS
		5200	12.496	11.974	0.0335	15.253	23.98	PASS
		5240	13.095	12.831	0.0396	15.975	23.98	PASS
	IEEE 802.11ac VHT20	5180	12.061	11.382	0.0298	14.745	23.98	PASS
		5200	12.541	11.886	0.0334	15.236	23.98	PASS
		5240	12.917	12.889	0.0390	15.913	23.98	PASS
	IEEE 802.11n HT40	5190	13.454	12.678	0.0407	16.094	23.98	PASS
		5230	14.294	13.852	0.0512	17.089	23.98	PASS
	IEEE 802.11ac VHT40	5190	13.458	12.763	0.0411	16.135	23.98	PASS
		5230	14.437	13.764	0.0516	17.124	23.98	PASS
	IEEE 802.11ac VHT80	5210	11.075	10.687	0.0245	13.896	23.98	PASS

BAND	Test Mode	Fre (MHz)	Conducted AVG Output Power (dBm)		Total Conducted Output Power (W)	Total Conducted Output Power (dBm)	Limit (dBm)	Result
			Ant 1	Ant 2				
U-NII-3	IEEE 802.11a	5745	17.021	16.777			30.00	PASS
		5785	16.080	15.626			30.00	PASS
		5825	16.012	15.294			30.00	PASS
	IEEE 802.11n HT20	5745	12.214	11.786	0.0317	15.016	30.00	PASS
		5785	11.260	10.704	0.0251	14.001	30.00	PASS
		5825	11.038	10.471	0.0238	13.774	30.00	PASS
	IEEE 802.11ac VHT20	5745	12.138	11.694	0.0311	14.932	30.00	PASS
		5785	11.204	10.730	0.0250	13.984	30.00	PASS
		5825	10.947	10.431	0.0235	13.707	30.00	PASS
	IEEE 802.11n HT40	5755	13.296	12.680	0.0399	16.009	30.00	PASS
		5795	12.384	11.595	0.0318	15.018	30.00	PASS
	IEEE 802.11ac VHT40	5755	9.475	12.681	0.0274	14.378	30.00	PASS
		5795	12.433	11.574	0.0319	15.035	30.00	PASS
	IEEE 802.11ac VHT80	5775	9.599	9.274	0.0176	12.450	30.00	PASS

5. PEAK POWER SPECTRAL DENSITY

5.1. Limit

Band	EUT Type	Limit
U-NII-1	Outdoor Access Point	17dBm/MHz
	Indoor Access Point	17dBm/MHz
	Fixed point-to-point Access Point	17dBm/MHz
	Mobile and Portable Client Device	11dBm/MHz
U-NII-2A	All Device	11dBm/MHz
U-NII-2C	All Device	11dBm/MHz
U-NII-3	All Device	30dBm/500KHz

5.2. Test Setup



5.3. Spectrum Analyzer Setting

Spectrum Parameters	Setting
RBW	1MHz(For U-NII-1&U-NII-2A&U-NII-2C) 500KHz(For U-NII-3)
VBW	3MHz(For U-NII-1&U-NII-2A&U-NII-2C) 2MHz(For U-NII-3)
Span	encompass the entire 26 dB EBW or 99% OBW of the signal
Sweep Time	Auto
Number of Sweep Point	$\geq 2 \times \text{SPAN}/\text{RBW}$
Detector	RMS(power averaging)
Trace Average	≥ 100 traces

5.4. Test Procedure

- Connect EUT antenna terminal to the spectrum analyzer with RF cable.
- Spectrum analyzer setting parameters in accordance with section 5.3.
- Set the EUT transmit continuously with maximum output power.
- Allow trace to stabilize, use the marker-to-peak function to set the marker to the average of the emission.
- If the duty cycle of test signal $< 98\%$, the result = max measured value + $10 \times \log(1/\text{duty cycle})$;
If the duty cycle of test signal $\geq 98\%$, the result = max measured value.
- Repeat above procedures until all modes and channels were measured.
- Record the results in the test report.

5.5. Test Result



Temperature		24.5°C	Relative Humidity		52.1%	Test Voltage	AC 120V/60Hz	
BAND	Test Mode	Fre (MHz)	Power Density (dBm/MHz)		Duty Factor (dB)	Total Power Density (dBm/MHz)	Limit (dBm/MHz)	Result
			Ant 1	Ant 2				
U-NII-1	IEEE 802.11a	5180	5.15	4.91	0.20	-----	11.00	PASS
		5200	5.40	4.87	0.20	-----	11.00	PASS
		5240	5.21	5.18	0.20	-----	11.00	PASS
	IEEE 802.11n HT20	5180	0.80	0.90	0.27	4.13	11.00	PASS
		5200	1.15	0.69	0.27	4.21	11.00	PASS
		5240	0.85	0.62	0.27	4.02	11.00	PASS
	IEEE 802.11ac VHT20	5180	0.63	0.47	0.25	3.81	11.00	PASS
		5200	1.22	0.76	0.25	4.25	11.00	PASS
		5240	0.84	0.66	0.25	4.01	11.00	PASS
	IEEE 802.11n HT40	5190	-1.47	-1.35	0.42	2.02	11.00	PASS
		5230	-1.34	-1.33	0.42	2.10	11.00	PASS
	IEEE 802.11ac VHT40	5190	-1.26	-1.84	0.47	1.94	11.00	PASS
		5230	-0.69	-0.99	0.47	2.65	11.00	PASS
	IEEE 802.11ac VHT80	5210	-3.47	-4.68	0.88	-0.14	11.00	PASS

BAND	Test Mode	Fre (MHz)	Power Density (dBm/500KHz)		Duty Factor (dB)	Total Power Density (dBm/500KHz)	Limit (dBm/500KHz)	Result
			Ant 1	Ant 2				
U-NII-3	IEEE 802.11a	5745	1.86	1.88	0.20	-----	30.00	PASS
		5785	2.27	1.18	0.20	-----	30.00	PASS
		5825	1.73	1.16	0.20	-----	30.00	PASS
	IEEE 802.11n HT20	5745	-0.06	-0.10	0.27	3.20	30.00	PASS
		5785	0.17	-0.58	0.27	3.09	30.00	PASS
		5825	-0.32	-0.86	0.27	2.70	30.00	PASS
	IEEE 802.11ac VHT20	5745	-0.05	0.27	0.25	3.37	30.00	PASS
		5785	1.22	-0.31	0.25	3.78	30.00	PASS
		5825	-0.43	-0.73	0.25	2.68	30.00	PASS
	IEEE 802.11n HT40	5755	-3.79	-4.35	0.42	-0.63	30.00	PASS
		5795	-4.12	-4.37	0.42	-0.81	30.00	PASS
	IEEE 802.11ac VHT40	5755	-3.76	-4.38	0.47	-0.57	30.00	PASS
		5795	-3.92	-4.78	0.47	-0.84	30.00	PASS
	IEEE 802.11ac VHT80	5775	-6.62	-7.93	0.88	-3.33	30.00	PASS

U-NII-1 IEEE 802.11a 5180MHz

ANT 1



ANT 2

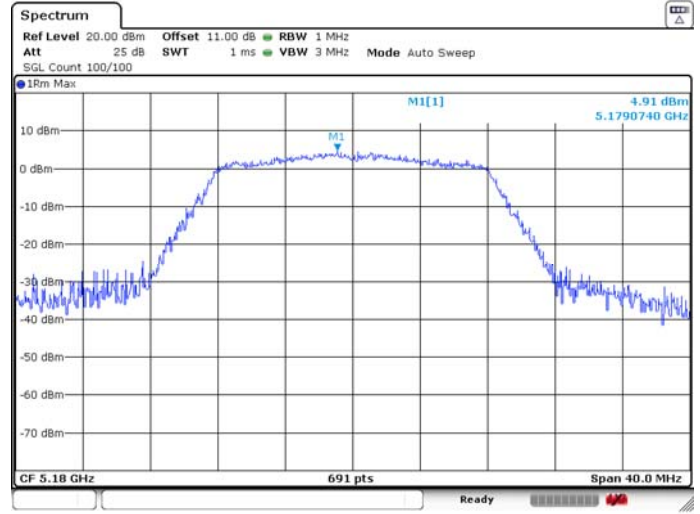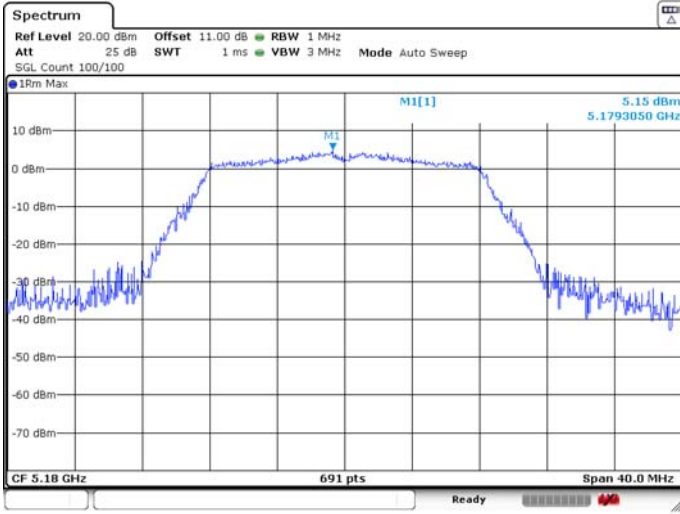

U-NII-1 IEEE 802.11a 5200MHz

ANT 1



ANT 2

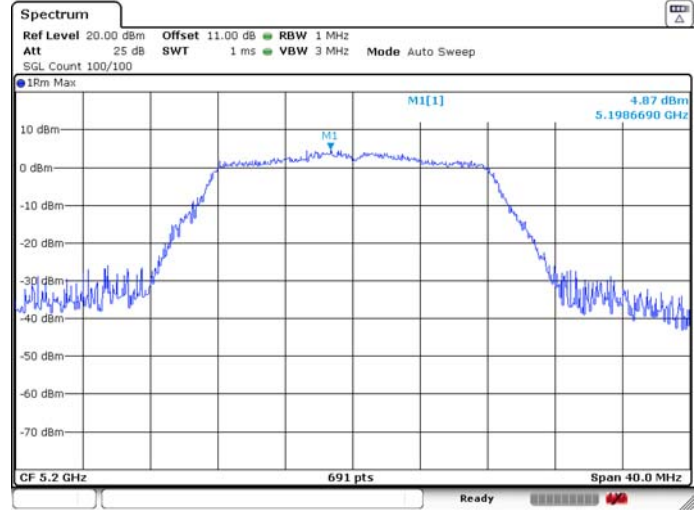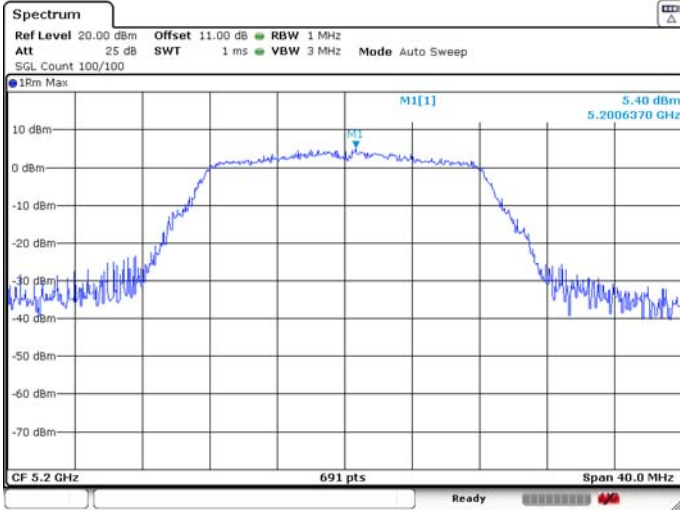

U-NII-1 IEEE 802.11a 5240MHz

ANT 1


ANT 2

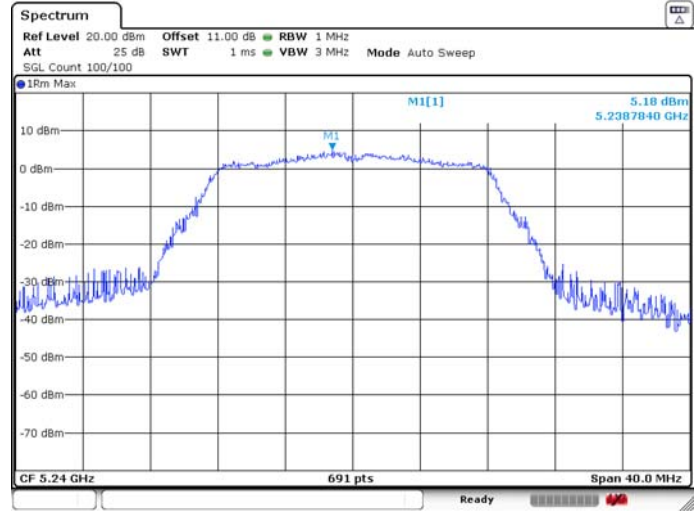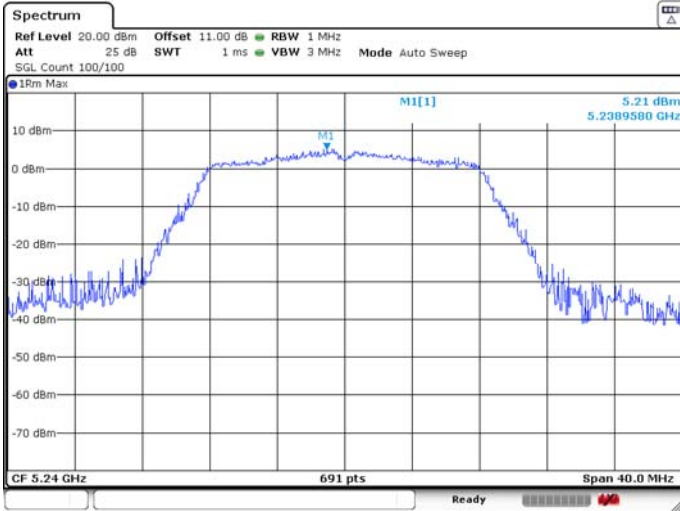

U-NII-1 IEEE 802.11n HT20 5180MHz

ANT 1



ANT 2

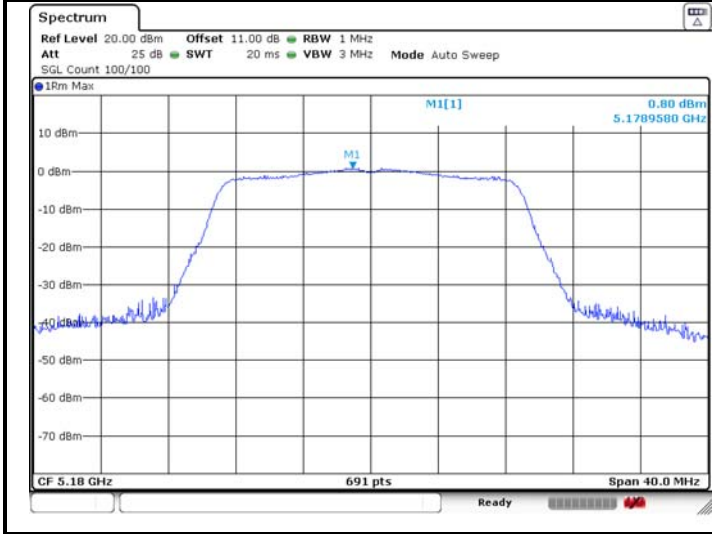

U-NII-1 IEEE 802.11n HT20 5200MHz

ANT 1


ANT 2

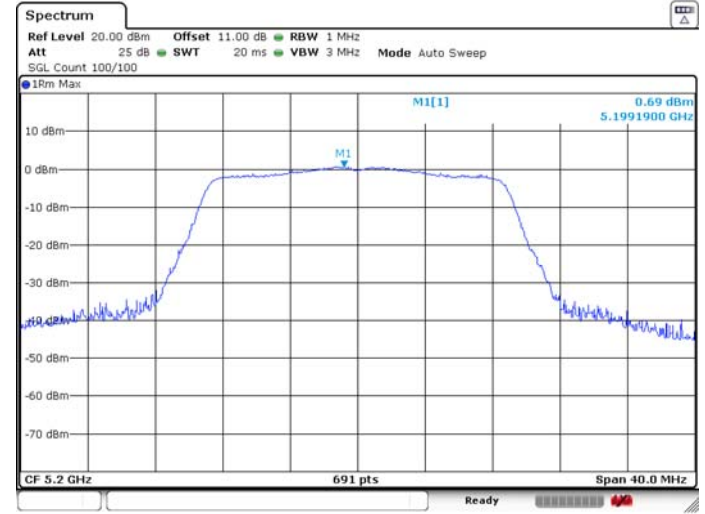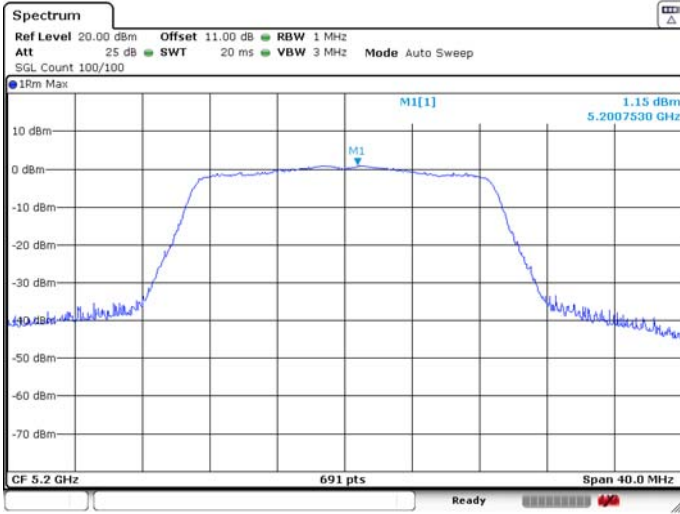

U-NII-1 IEEE 802.11n HT20 5240MHz

ANT 1


ANT 2

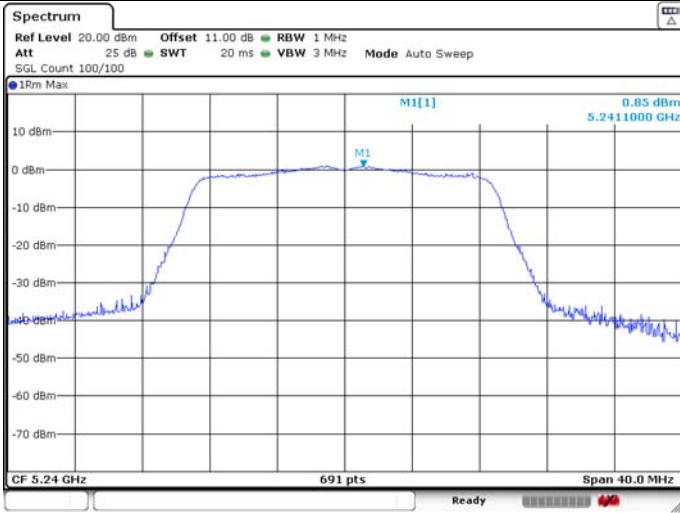

U-NII-1 IEEE 802.11ac VHT20 5180MHz

ANT 1



ANT 2

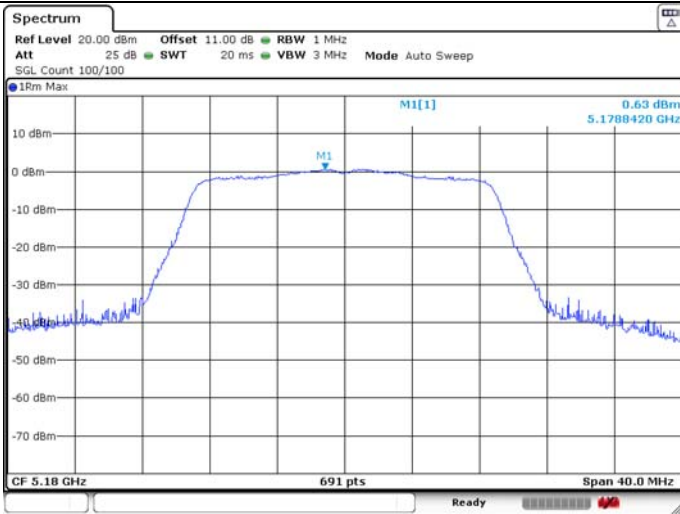

U-NII-1 IEEE 802.11ac VHT20 5200MHz

ANT 1



ANT 2

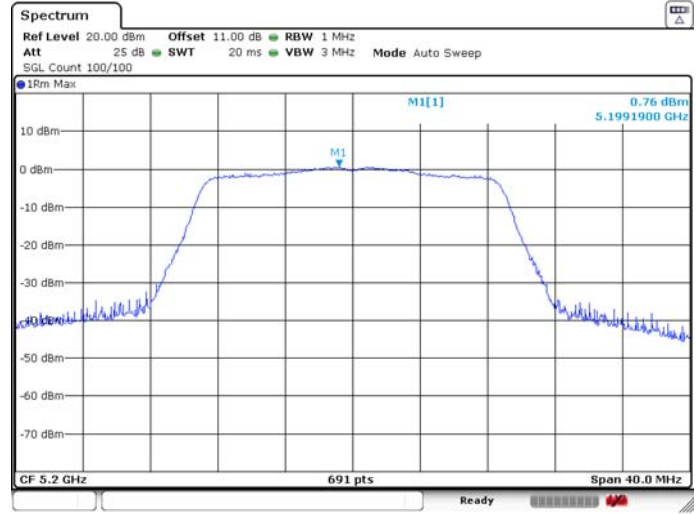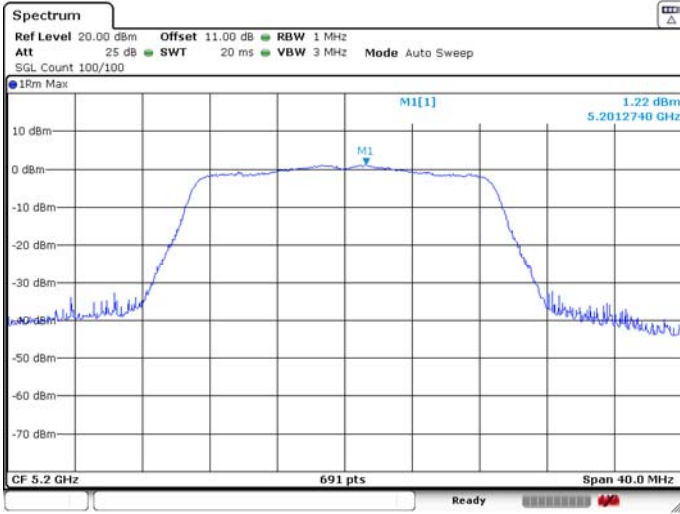

U-NII-1 IEEE 802.11ac VHT20 5240MHz

ANT 1


ANT 2

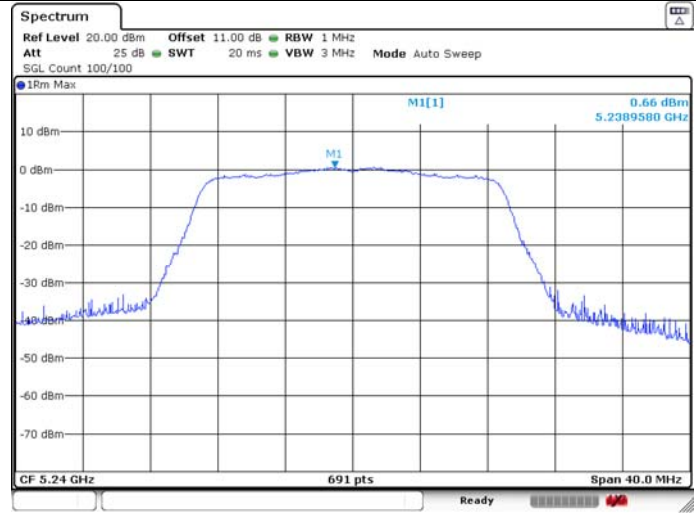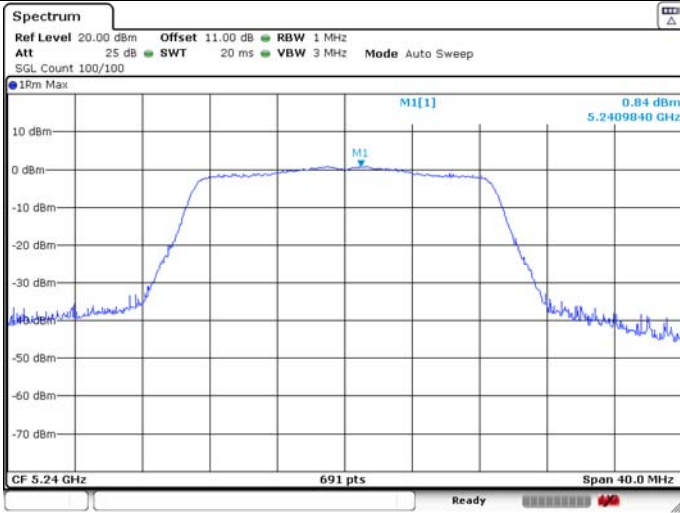

U-NII-1 IEEE 802.11n HT40 5190MHz

ANT 1


ANT 2

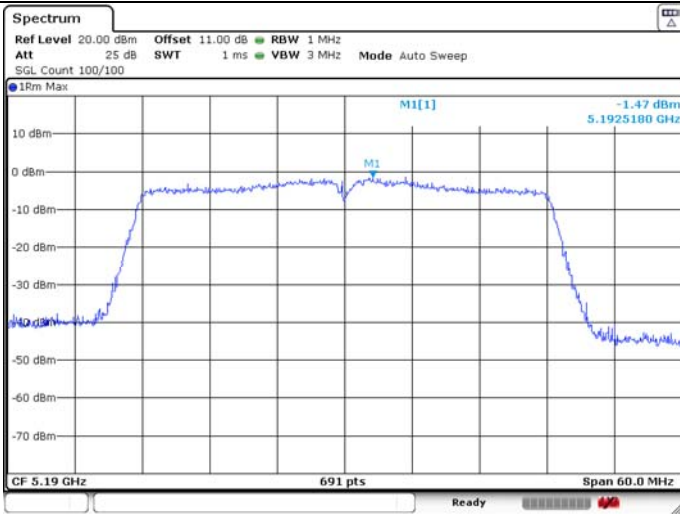

U-NII-1 IEEE 802.11n HT40 5230MHz

ANT 1



ANT 2

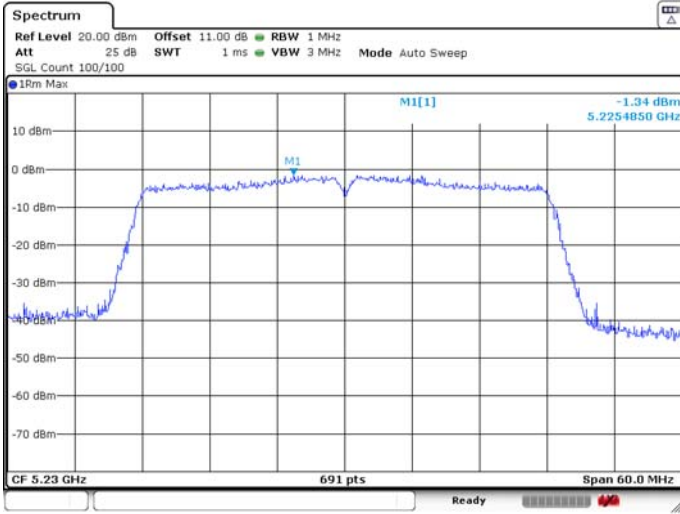

U-NII-1 IEEE 802.11ac VHT40 5190MHz

ANT 1


ANT 2

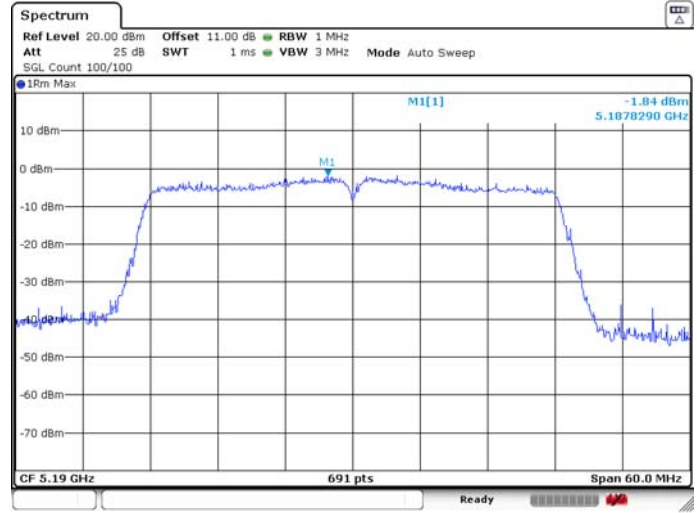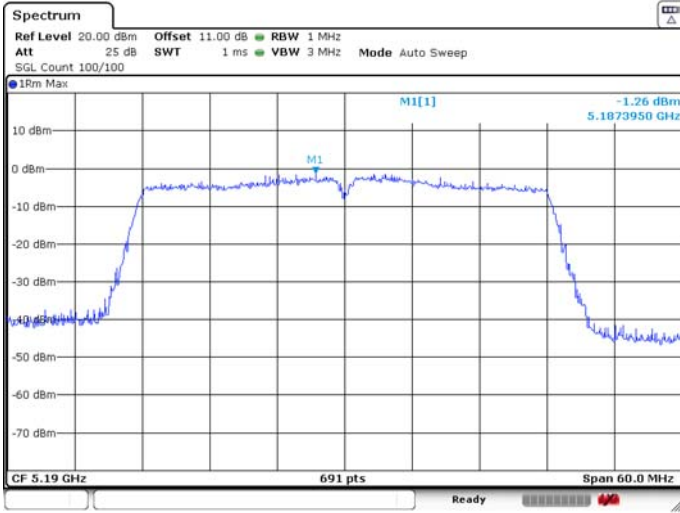

U-NII-1 IEEE 802.11ac VHT40 5230MHz

ANT 1



ANT 2

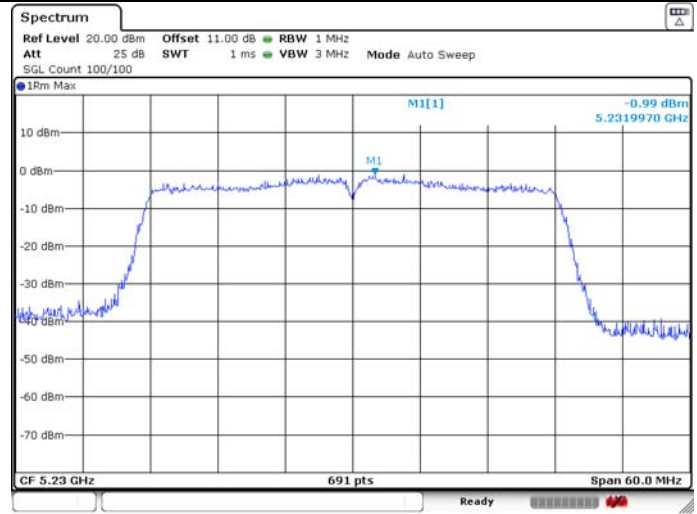

U-NII-1 IEEE 802.11ac VHT80 5210MHz

ANT 1



ANT 2

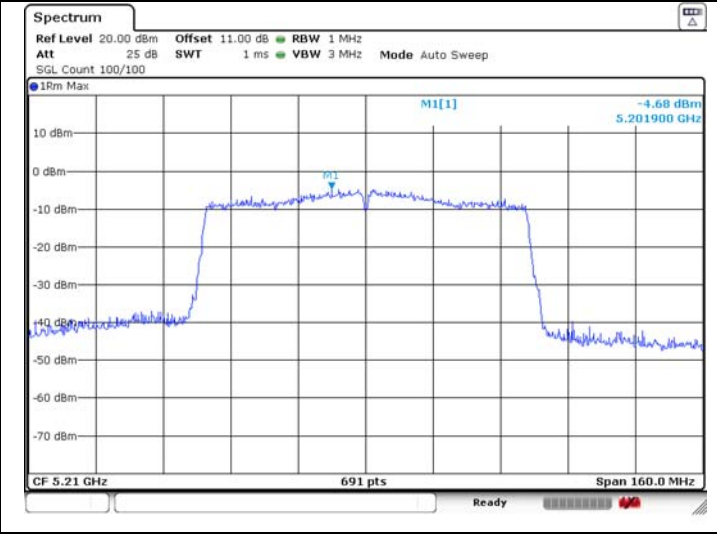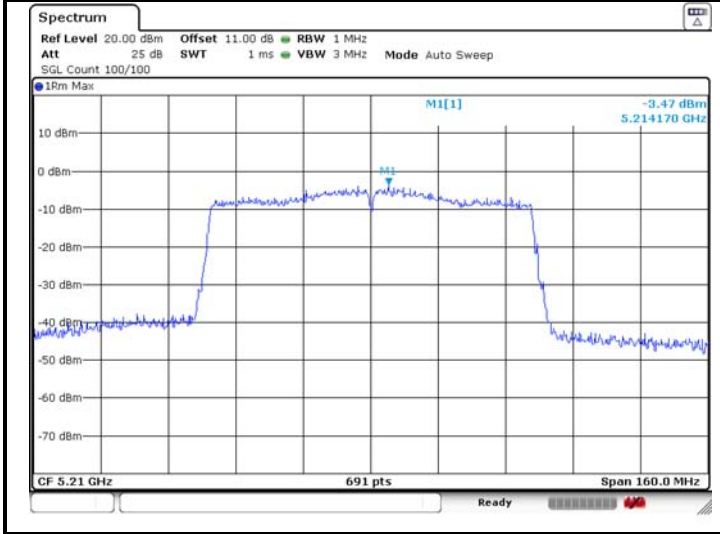

U-NII-3 IEEE 802.11a 5745MHz

ANT 1



ANT 2

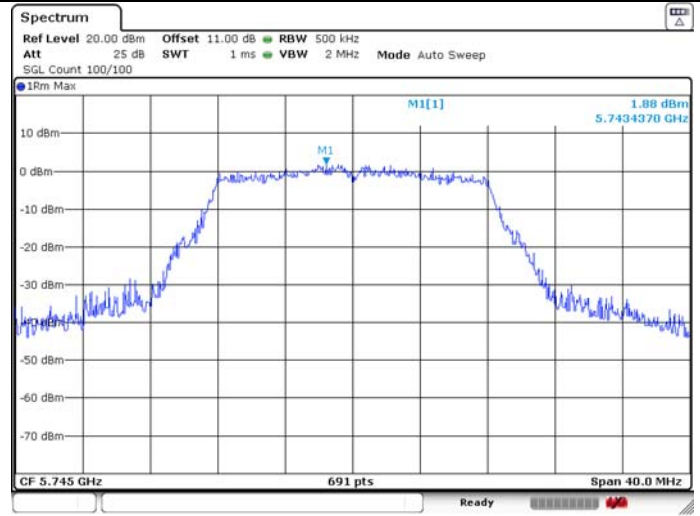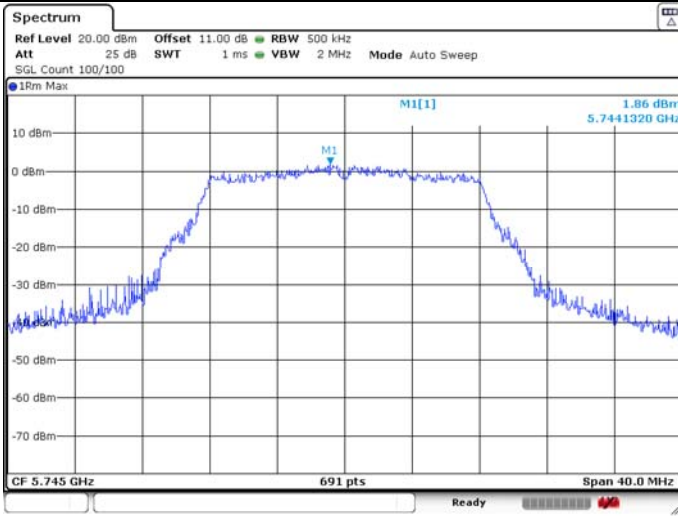

U-NII-3 IEEE 802.11a 5785MHz

ANT 1



ANT 2

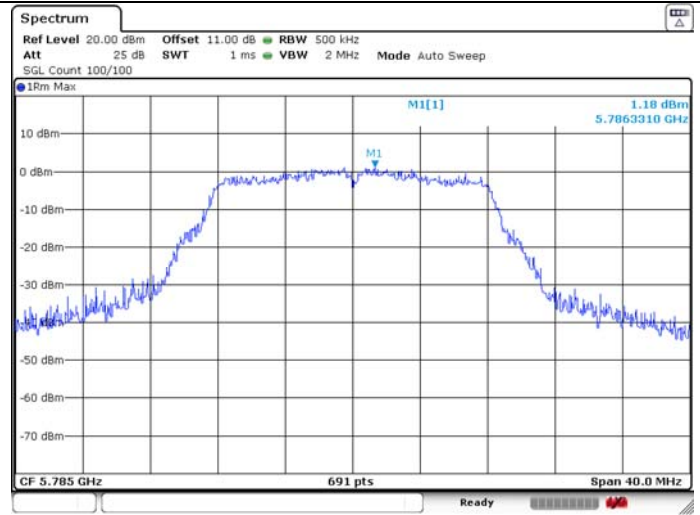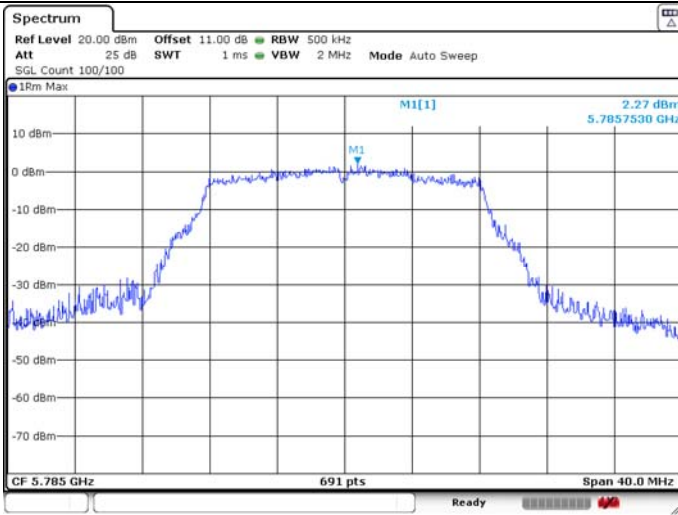

U-NII-3 IEEE 802.11a 5825MHz

ANT 1


ANT 2

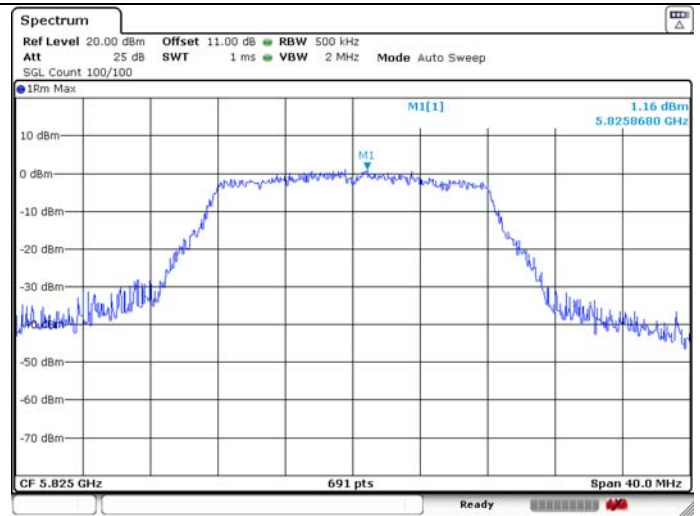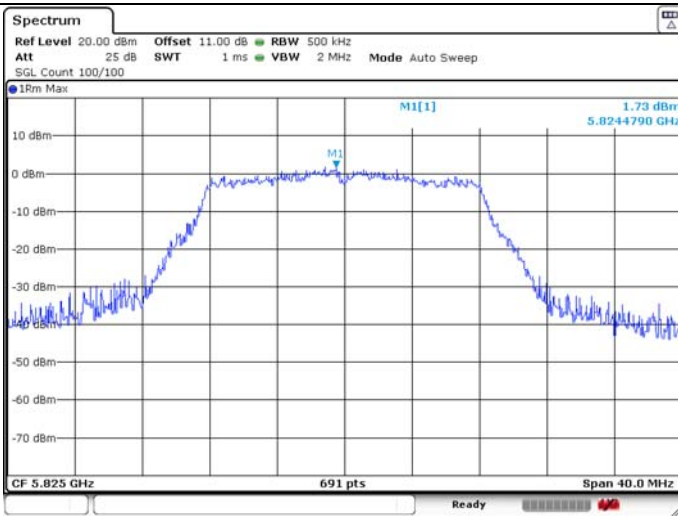

U-NII-3 IEEE 802.11n HT20 5745MHz

ANT 1


ANT 2

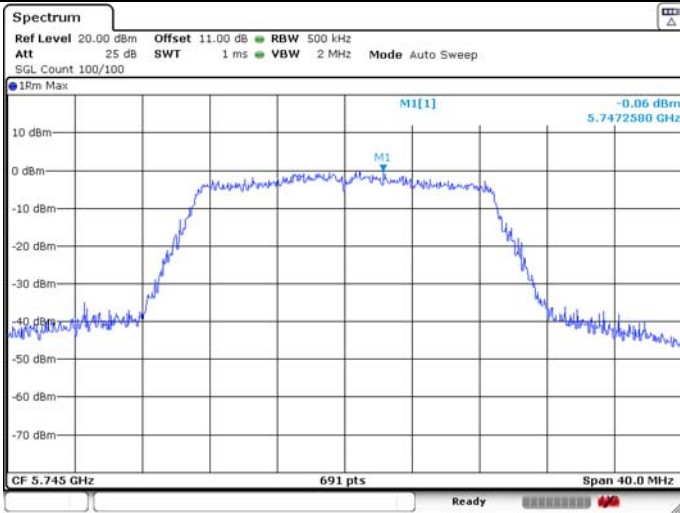

U-NII-3 IEEE 802.11n HT20 5785MHz

ANT 1



ANT 2

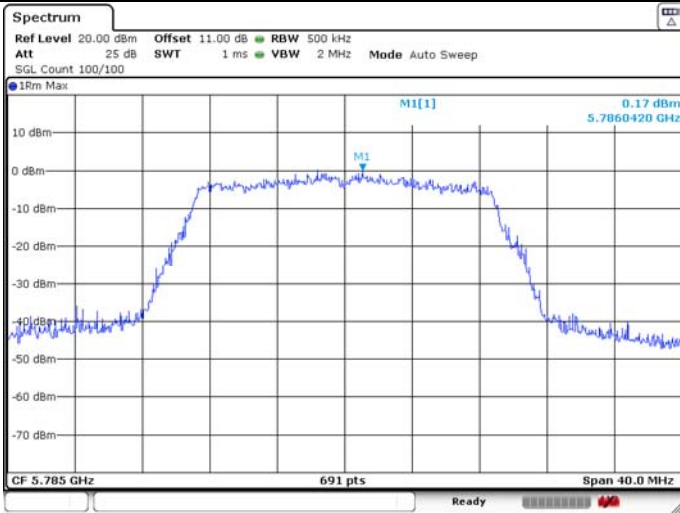

U-NII-3 IEEE 802.11n HT20 5825MHz

ANT 1



ANT 2

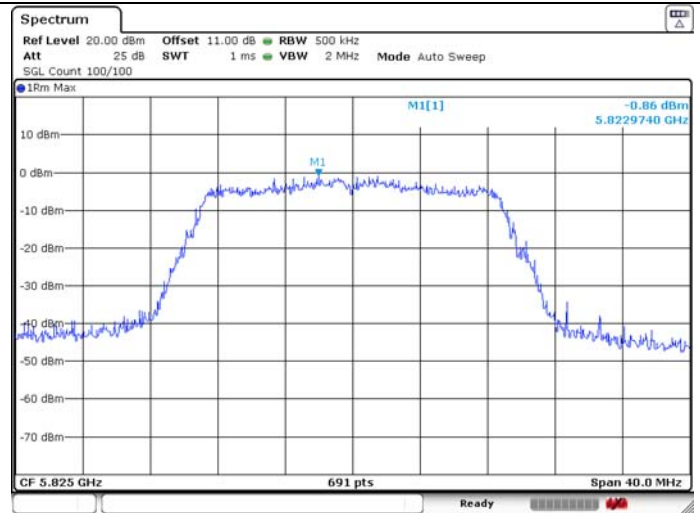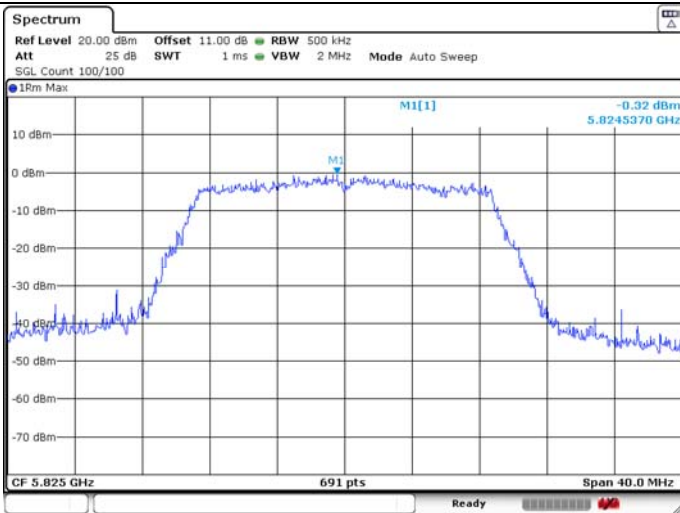

U-NII-3 IEEE 802.11ac VHT20 5745MHz

ANT 1


ANT 2

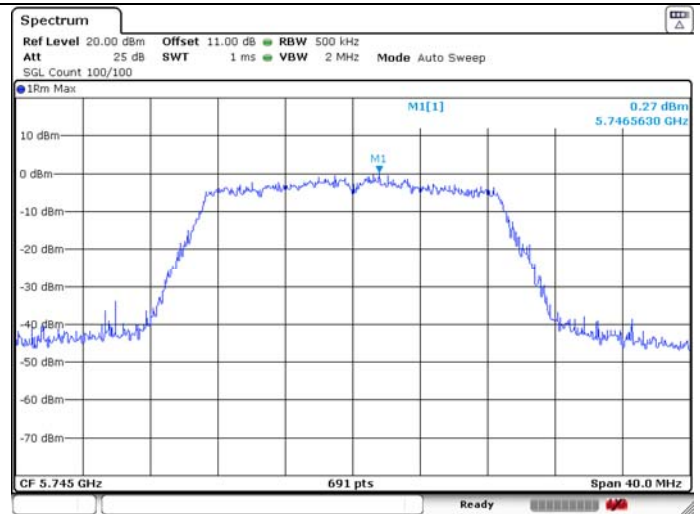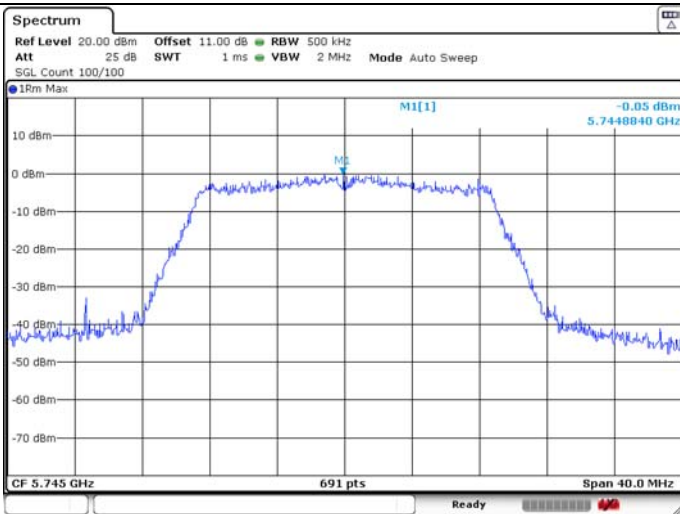

U-NII-3 IEEE 802.11ac VHT20 5785MHz

ANT 1



ANT 2

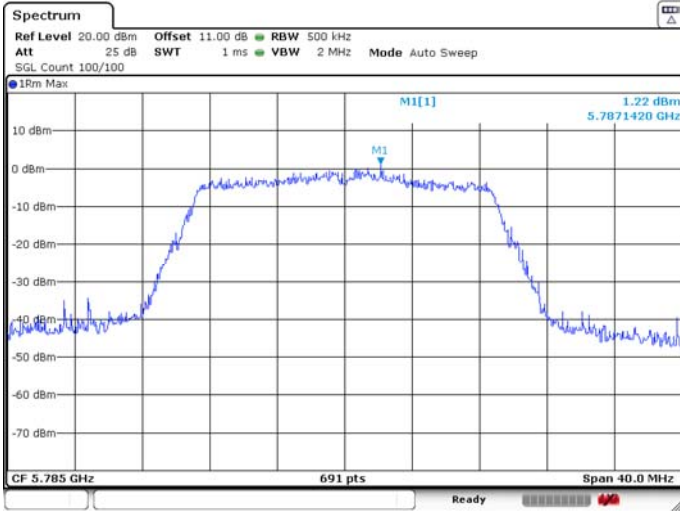

U-NII-3 IEEE 802.11ac VHT20 5825MHz

ANT 1



ANT 2

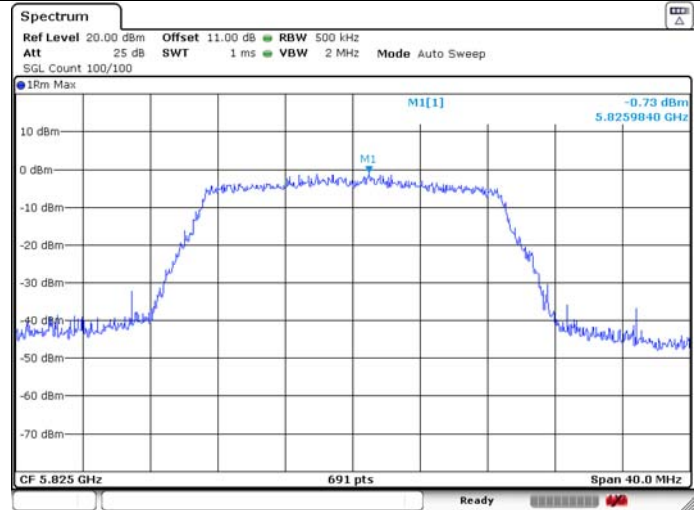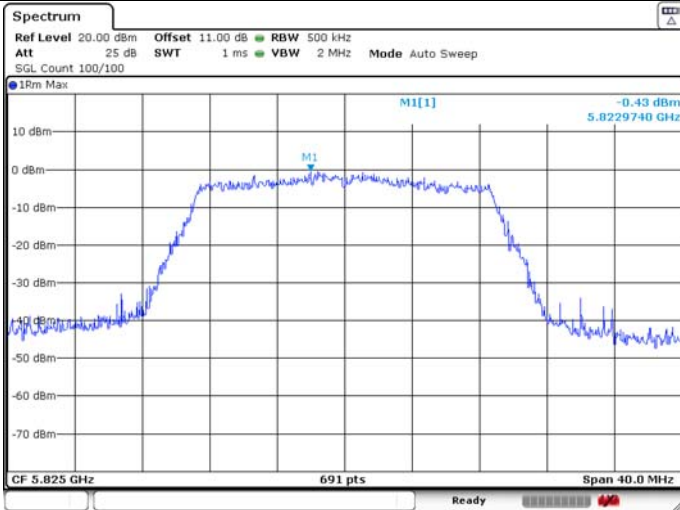

U-NII-3 IEEE 802.11n HT40 5755MHz

ANT 1



ANT 2

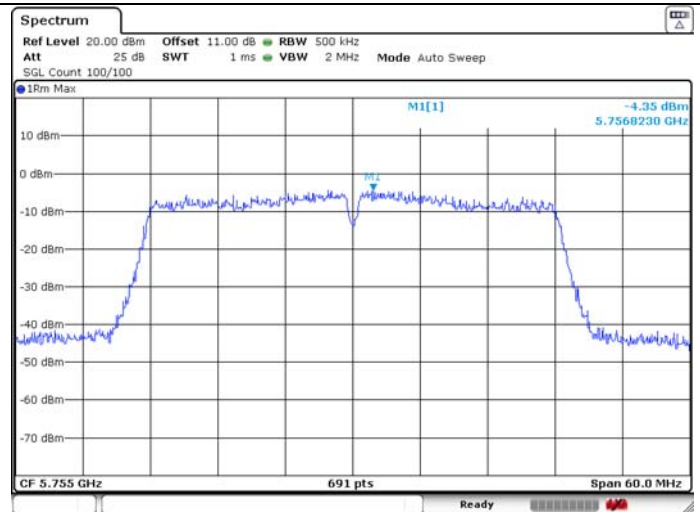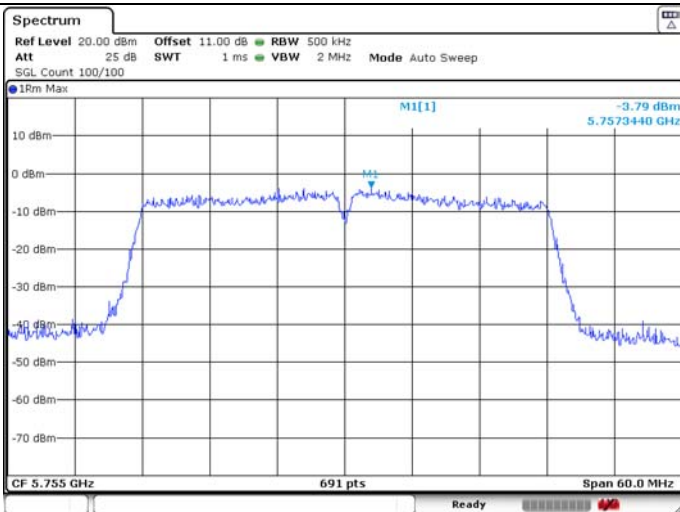

U-NII-3 IEEE 802.11n HT40 5795MHz

ANT 1


ANT 2

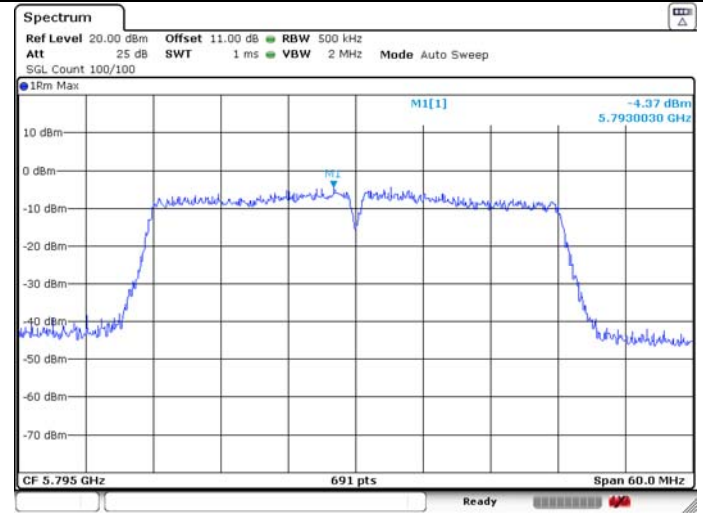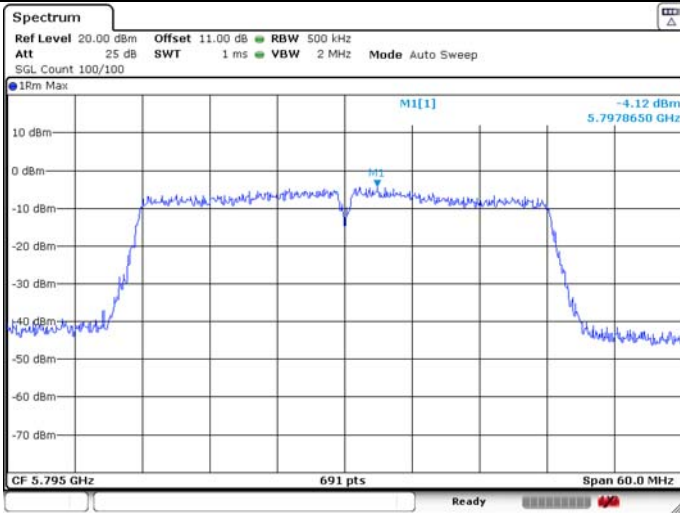

U-NII-3 IEEE 802.11ac VHT40 5755MHz

ANT 1



ANT 2

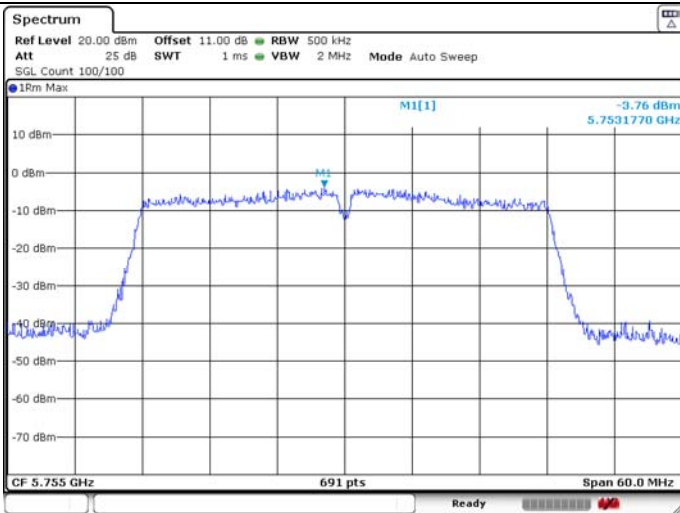

U-NII-3 IEEE 802.11ac VHT40 5795MHz

ANT 1

ANT 2

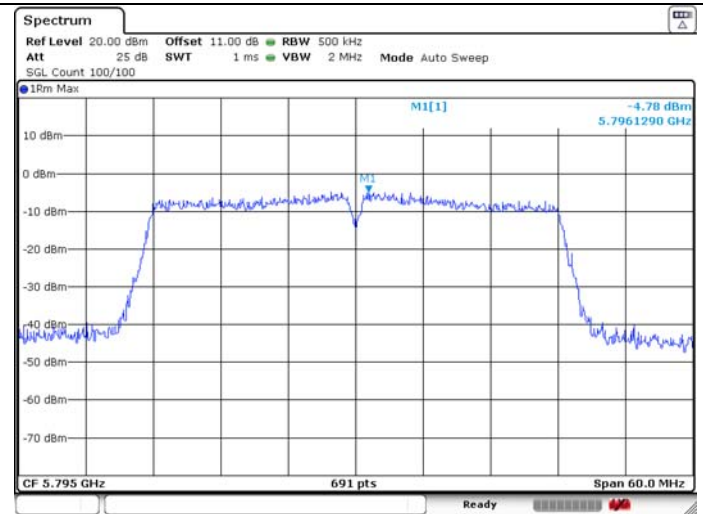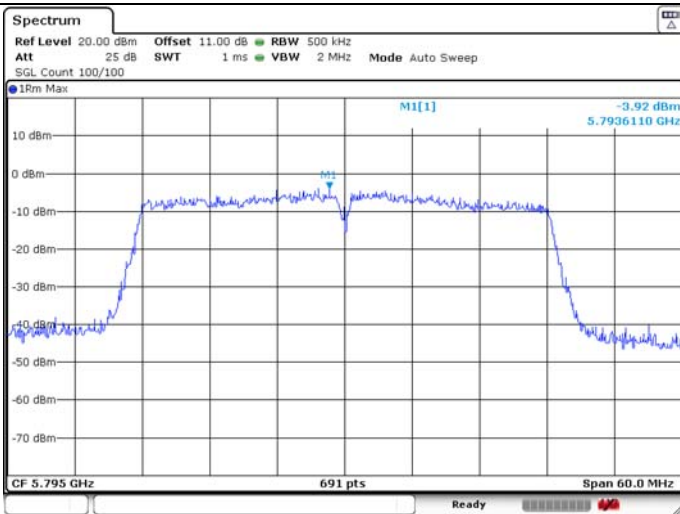

U-NII-3 IEEE 802.11ac VHT80 5775MHz

ANT 1

ANT 2

