



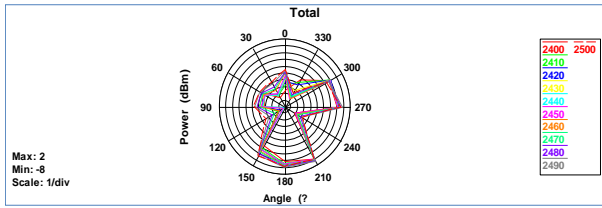


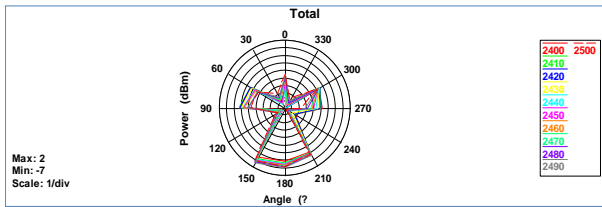


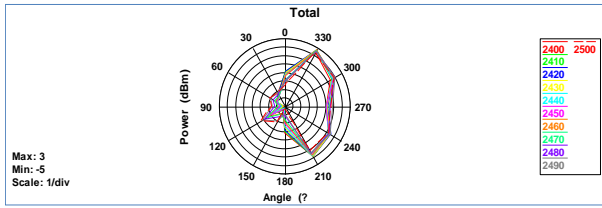


# Antenna Passive Measurements in Chamber

Manufacturer \_\_\_\_\_ Date 2018.11.22 Antenna type. PCB Antenna  
Model No A1 Temperature 24 °C Humidity 50%

Frequency (MHz)	Efficiency (dB)	Efficiency (%)	Gain (dBi)
2400	-2.0	63.6	1.3
2410	-1.8	65.8	1.5
2420	-1.7	66.9	1.6
2430	-1.9	65.3	1.6
2440	-2.0	63.2	1.5
2450	-2.0	63.2	1.5
2460	-1.9	65.2	1.6
2470	-1.9	64.7	1.5
2480	-1.8	66.3	1.4
2490	-1.6	68.6	1.4
2500	-1.8	66.8	1.1



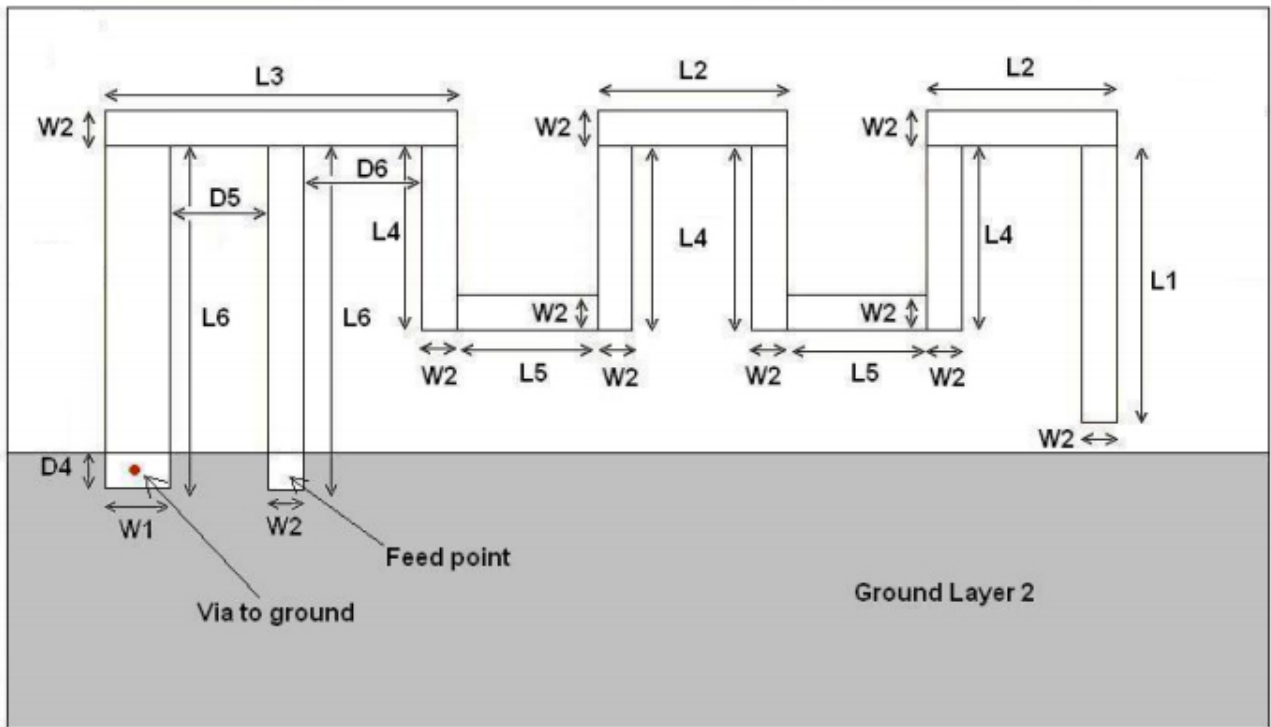

### Antenna Dimensions

L1	3.94 mm
L2	2.70 mm
L3	5.00 mm
L4	2.64 mm
L5	2.00 mm
L6	4.90 mm
W1	0.90 mm
W2	0.50 mm
D4	0.50 mm
D5	1.40 mm
D6	1.70 mm