

FCC Test Report

Report No.: AGC02294210504FE10

FCC ID : 2AGND-FRSB1

PRODUCT DESIGNATION: Two-way Radio

BRAND NAME : BTECH

MODEL NAME : FRS-B1

APPLICANT : BTECH (BaoFeng Tech)

DATE OF ISSUE : Jul. 08, 2021

STANDARD(S) : FCC Part 95 Rules

REPORT VERSION : V 1.0

Attestation of Global Compliance (Shenzhen) Co., Ltd



Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Bedicated Restroy/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test respresented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report report apply only to the test report should be addressed to AGC by agc@agc-cert.com.



Page 2 of 36

REPORT REVISE RECORD

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	1	Jul. 08, 2021	Valid	Initial Release

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Restrict/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the writter authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Page 3 of 36

TABLE OF CONTENTS

1.	GENERAL INFORMATION	
2. F	PRODUCT INFORMATION	6
	2.1 PRODUCT TECHNICAL DESCRIPTION	
	2.2 TEST FREQUENCY LIST	7
	2.3 RELATED SUBMITTAL(S) / GRANT (S)	
	2.4 TEST METHODOLOGY	8
	2.5 CALCULATION OF EMISSION INDICATORS	
	2.6 SPECIAL ACCESSORIES	8
	2.7 EQUIPMENT MODIFICATIONS	
	2.8 ANTENNA REQUIREMENT	
3. 7	TEST ENVIRONMENT	
	3.1 ADDRESS OF THE TEST LABORATORY	
	3.2 TEST FACILITY	
	3.3 ENVIRONMENTAL CONDITIONS	
	3.4 MEASUREMENT UNCERTAINTY	11
	3.5 LIST OF EQUIPMENTS USED	
4.5	SYSTEM TEST CONFIGURATION	13
	4.1 EUT CONFIGURATION	13
	4.2 EUT EXERCISE	
	4.3 CONFIGURATION OF TESTED SYSTEM	13
	4.4 EQUIPMENT USED IN TESTED SYSTEM	13
	4.5 SUMMARY OF TEST RESULTS	14
5. I	DESCRIPTION OF TEST MODES	15
6.F	FREQUENCY STABILITY	
	6.1 PROVISIONS APPLICABLE	16
	6.2 MEASUREMENT PROCEDURE	16
	6.3 MEASUREMENT SETUP	
	6.4 MEASUREMENT RESULTS	
7. E	EMISSION BANDWIDTH	
	7.1 PROVISIONS APPLICABLE	18
	7.2 MEASUREMENT PROCEDURE	18
	7.3 MEASUREMENT SETUP	18
	7.4 MEASUREMENT RESULTS	20
8. 9	SPURIOUS RATIATED EMISSION	21
	0.4 DDOVICIONS ADDITIONS F	

8.1 PROVISIONS APPLICABLE.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Dedicated Feating/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Page 4 of 36

8.2 MEASUREMENT PROCEDURE	21
8.3 MEASUREMENT SETUP	22
8.4 MEASUREMENT RESULTS	23
8.5 EMISSION MASK PLOT	27
9. MAXIMUMN TRANSMITTER POWER	29
9.1 PROVISIONS APPLICABLE	29
9.2 MEASUREMENT METHOD	
9.3 MEASUREMENT SETUP	30
9.4 MEASUREMENT RESULTS	31
10.MODULATION CHARACTERISTICS	32
10.1 PROVISIONS APPLICABLE	32
10.2 MEASUREMENT METHOD	32
10.3 MEASUREMENT SETUP	32
10.4 MEASUREMENT RESULTS	33
APPENDIX I: PHOTOGRAPHS OF TEST SETUP	35
APPENDIX II: PHOTOGRAPHS OF TEST EUT	36

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Pasting/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the writter purportation of AGE. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Page 5 of 36

1. GENERAL INFORMATION

Applicant	BTECH (BaoFeng Tech)			
Address	702 N Industrial Ave Arlington South Dakota United States 57212			
Manufacturer	PO FUNG ELECTRONIC(HK) INTERNATIOANL GROUP COMPANY			
Address	3/F FULOK BLDG 131-133 WING LOK ST SHEUNG WAN, Hong Kong			
Factory	PO FUNG ELECTRONIC(HK) INTERNATIOANL GROUP COMPANY			
Address	3/F FULOK BLDG 131-133 WING LOK ST SHEUNG WAN, Hong Kong			
Product Designation	Two-way radio			
Brand Name	ВТЕСН			
Test Model	FRS-B1			
Deviation from Standard	None			
Date of Receipt	May 14, 2021			
Date of Test	May 14, 2021~Jul. 08, 2021			
Test Result Pass				

WE HEREBY CERTIFY THAT:

The above equipment was tested by Attestation of Global Compliance (Shenzhen) Co., Ltd. The data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI/TIA-603-E-2016. The sample tested as described in this report is in compliance with the FCC Rules Part 95. The test results of this report relate only to the tested sample identified in this report.

Prepared By

Donjon Huang (Project Engineer)

Reviewed By

Calvin Liu (Reviewer)

Approved By

Forrest Lei Authorized Officer

Jul. 08, 2021

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Bedicated Postuo/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGE. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc~cert.com.



Page 6 of 36

2. PRODUCT INFORMATION

2.1 PRODUCT TECHNICAL DESCRIPTION

Hardware Version	BF-T21-A21-V1.3			
Software Version	T21-FRS-V0			
Power Supply	DC 3.7V by battery, 900mAh			
Communication Type	Voice / Tone only			
	462.5625 - 462.7125MHz (1~7 channel)			
Operation Frequency Range	467.5625 - 467.7125MHz (8~14 channel)			
	462.5500 - 462.7250MHz (15~22 channel)			
Modulation Type	FM			
Channel Separation	12.5 KHz			
Emission Bandwidth	10.58kHz			
Emission Designator 11K0F3E				
Number of Channels:	22 Channels			
Rated Output Power	2W (It was fixed by the manufacturer, any individual can't arbitrarily change it.)			
Maximum Transmitter Power	FRS: 32.87dBm (2W-12.5KHz) FRS: 26.86dBm (0.5W-12.5KHz)			
Antenna Designation Inseparable				
Antenna Gain 1.5dBi				
Frequency Tolerance	1.054ppm			

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Festing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Page 7 of 36

2.2 TEST FREQUENCY LIST

According to ANSI C63.26 section 5.1.2.1:

Measurements of transmitters shall be performed and, if required, reported for each frequency band in which the EUT can be operated with the device transmitting at the number of frequencies in each band specified in Table 2.

Frequency range Over which EUT operates	Number of Frequencies	Location in frequency range of operation
1 MHz or less	1 6	Middle
1 MHz to 10 MHz	2	1 near top and 1 near bottom
More than 10 MHz	3 @	1 near top, 1 near middle, and 1 near bottom

Operation Frequency Each of Channel						
	FRS	FRS		FRS		
Channel	Channel Frequency		Frequency	Channel	Frequency	
1	462.5625 MHz	8	467.5625 MHz	15	462.5500 MHz	
2	462.5875 MHz	9	467.5875 MHz	16	462.5750 MHz	
3	462.6125 MHz	10	467.6125 MHz	17	462.6000 MHz	
4	462.6375 MHz	11	467.6375 MHz	18	462.6250 MHz	
5	462.6625 MHz	12	467.6625 MHz	19	462.6500 MHz	
6	462.6875 MHz	13	467.6875 MHz	20	462.6750 MHz	
7	462.7125 MHz	14	467.7125 MHz	21	462.7000 MHz	
0					462.7250 MHz	

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Restriction Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the writter pathorization of AGC, the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Page 8 of 36

2.3 RELATED SUBMITTAL(S) / GRANT (S)

This submittal(s) (test report) is intended for FCC ID: **2AGND-FRSB1**, filing to comply with Part 2, Part 95 of the Federal Communication Commission rules.

2.4 TEST METHODOLOGY

The tests were performed according to following standards:

No.	Identity	Document Title		
1	FCC 47 CFR Part 95	PERSONAL RADIO SERVICES		
2	FCC 47 CFR Part 2	Frequency allocations and radio treaty matters; general rules and regulations		
3	ANSI C63.26-2015 American National Standard for Compliance Testing of Transmitters Used in Licensed Radio Services			
4	ANSI/TIA-603-E-2016	Land Mobile FM or PM Communications Equipment Measurement and Performance Standards		
5	KDB 888861 D01	888861 D01 Part 95 GMRS FRS v01		

2.5 CALCULATION OF EMISSION INDICATORS

FCC Rules and Regulations Part 2.202: Necessary Bandwidth and Emission Bandwidth

For FM Mode (ChannelSpacing: 12.5kHz)

Emission Designator 11K0F3E

In this case, the maximum modulating frequency is 3.0 kHz with a 2.5 kHz deviation.

BW = 2(M+D) = 2*(3.0 kHz + 2.5 kHz) = 11 kHz = 11KO

F3E portion of the designator represents an FM voice transmission.

Therefore, the entire designator for 12.5 kHz channel spacing FM mode is 11K0F3E.

2.6 SPECIAL ACCESSORIES

Not available for this EUT intended for grant.

2.7 EQUIPMENT MODIFICATIONS

Not available for this EUT intended for grant.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Psycholinspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGE, the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Page 9 of 36

2.8 ANTENNA REQUIREMENT

Excerpt from §95.587 of the FCC Rules/Regulations:

The antenna of each FRS transmitter type must meet the following requirements.

- (1) The antenna must be a non-removable integral part of the FRS transmitter type.
- (2) The gain of the antenna must not exceed that of a half-wave dipole antenna.
- (3) The antenna must be designed such that the electric field of the emitted waves is vertically polarized when the unit is operated in the normal orientation.
- The antenna of this device is permanently attached.
- There are no provisions for connection to an external antenna.

Conclusion: The unit complies with the requirement of §95.587.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Restriction Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the writter exphorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Page 10 of 36

3. TEST ENVIRONMENT

3.1 ADDRESS OF THE TEST LABORATORY

Laboratory: Attestation of Global Compliance (Shenzhen) Co., Ltd.

Address: 1-2/F, Building 19, Junfeng Industrial Park, Chongqing Road, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

3.2 TEST FACILITY

The test facility is recognized, certified, or accredited by the following organizations:

CNAS-Lab Code: L5488

Attestation of Global Compliance (Shenzhen) Co., Ltd. has been assessed and proved to be in compliance with CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC17025: 2017 General Requirements) for the Competence of Testing and Calibration Laboratories.

A2LA-Lab Cert. No.: 5054.02

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025: 2017 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

FCC-Registration No.: 975832

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files with Registration 975832.

IC-Registration No.: 24842

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the Certification and Engineering Bureau of Industry Canada. The acceptance letter from the IC is maintained in our files with Registration 24842.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Bedicated Residual Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGE, the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc~cert.com.



Page 11 of 36

3.3 ENVIRONMENTAL CONDITIONS

	NORMAL CONDITIONS	EXTREME CONDITIONS	
Temperature range (°C)	15 - 35	-20 - 50	
Relative humidty range	20 % - 75 %	20 % - 75 %	
Pressure range (kPa)	86 - 106	86 - 106	
Power supply	DC 3.7V	LV DC 3.15V/HV DC 4.26V	

Note: The Extreme Temperature and Extreme Voltages declared by the manufacturer.

3.4 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement y ±U, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of k=2, providing a level of confidence of approximately 95%.

Test Items	Measurement Uncertainty		
Frequency stability	±0.5%		
Transmitter power conducted	±0.8dB		
Transmitter power Radiated	±1.3dB		
Conducted spurious emission 9kHz-40 GHz	±2.7dB		
Conducted Emission	±3.2 dB		
Radiated Emission below 1GHz	±3.9 dB		
Radiated Emission above 1GHz	±4.8 dB		
Occupied Channel Bandwidth	±2 %		
FM deviation	±2 %		
Audio level	±0.98dB		
Low Pass Filter Response	±0.65dB		
Modulation Limiting	0.42 %		
Transient Frequency Behavior	6.8 %		

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Residual Algorithms and the report is not permitted without the written authorization of AGC where the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Page 12 of 36

3.5 LIST OF EQUIPMENTS USED

	- 6				©
Equipment	Manufacturer	Model	S/N	Cal. Date	Cal. Due
TEST RECEIVER	R&S	ESCI	10096	Apr. 14, 2021	Apr. 13, 2022
EXA Signal Analyzer	Aglient	N9020A	W1312-60196	Aug. 21, 2020	Aug. 20, 2021
EXA Signal Analyzer	Aglient	N9020A	MY52090123	Sep. 03, 2020	Sep. 02, 2021
Horn antenna	SCHWARZBECK	BBHA 9170	#768	Sep.16, 2019	Sep.15, 2021
preamplifier	ChengYi	EMC184045SE	980508	Sep. 23, 2019	Sep. 22, 202
Double-Ridged Waveguide Horn	ETS LINDGREN	3117	00034609	Apr. 23, 2021	Apr. 22, 2023
Broadband Preamplifier	SCHWARZBECK	BBV 9718	9718-205	Jun. 09, 2020	Jun. 08, 2021
Broadband Preamplifier	SCHWARZBECK	BBV 9718	9718-205	Jun. 07, 2021	Jun. 06, 2022
HORN ANTENNA	EM	EM-AH-10180	1	Feb.26, 2021	Feb.25, 2022
SIGNAL GENERATOR	AGILENT	E4421B	MY43351603	May 11, 2021	May 10, 2022
SIGNAL GENERATOR	R&S	SMT03	A0304261	Jun. 09, 2020	Jun. 08, 2021
SIGNAL GENERATOR	R&S	SMT03	A0304261	Jun. 07, 2021	Jun. 06, 2022
ANTENNA	SCHWARZBECK	VULB9168	VULB9168-494	Jan. 08, 2021	Jan. 07, 2023
ANTENNA	SCHWARZBECK	VULB9168	D69250	Sep. 20, 2019	Sep. 19, 2021
Active loop antenna (9K-30MHz)	ZHINAN	ZN30900C	18051	May 24, 2020	May 23, 2021
Active loop antenna (9K-30MHz)	ZHINAN	ZN30900C	18051	May 22, 2021	May 20, 2022
Modulation Domain Analyzer	HP	53310A	3121A02467	Aug. 26, 2020	Aug. 25, 202
Small environmental tester	ESPEC	SH-242	- NO	Sep. 03, 2020	Sep. 02, 2022
RF Communication Test Set	HP	8920B	US35010161	Sep. 03, 2020	Sep. 02, 2027
Attenuator	Weinachel Corp	58-30-33	ML030	Oct. 26, 2020	Oct. 25, 2021
RF Cable	R&S	1#	5	Each time	N/A
RF Cable	R&S	2#	60	Each time	N/A
Fliter-UHF	Microwave	N25155M2	498705	May 09, 2021	May 08, 2022

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the specificated resting/inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the writter pathorization of AGC, the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Page 13 of 36

4.SYSTEM TEST CONFIGURATION

4.1 EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commission's requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

4.2 EUT EXERCISE

The Transmitter was operated in the normal operating mode. The TX frequency was fixed which was for the purpose of the measurements.

4.3 CONFIGURATION OF TESTED SYSTEM

Fig. 2-1 Configuration of Tested System

EUT

Table 2-1 Equipment Used in Tested System

4.4 EQUIPMENT USED IN TESTED SYSTEM

The Following Peripheral Devices And Interface Cables Were Connected During The Measurement:

Test Accessories Come From The Laboratory

Test Accessories Come From The Manufacturer

Item	Equipment	Model No.	Identifier	Note
1	1 Two-way Radio FRS-B1		FCC ID: 2AGND-FRSB1	EUT
2	Adapter	YC-2011A	Input: AC 100-240V 50/60Hz, 0.3A Output: DC 5V 2A	Accessories
3	Battery	BL-FA1	DC 3.7V 900mAh	Accessories
4	Back clip	N/A	N/A	Accessories
<u> </u>	USB Cable	N/A	N/A	Accessories

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the common stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc~cert.com.



Page 14 of 36

4.5 SUMMARY OF TEST RESULTS

Item	FCC Rules	Description of Test	Result Pass	
1	FCC 47 CFR PART 95	Antenna Equipment		
2	§ 95.567& 2.1046(a)	Maximum Transmitter Power	Pass	
3	§95.575& 2.1047(a) (b)	Modulation Limit	Pass	
4	§95.575& 2.1047(a)	Audio Frequency Response	Pass	
5	§95.573& 2.1049	Emission Bandwidth	Pass	
6	§95.579& 2.1049	Emission Mask	Pass	
7	§95.565& 2.1055(a) (1)	Frequency Stability	Pass	
8	§95.579& 2.1053	Spurious Ratiated Emission	Pass	

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Festing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Page 15 of 36

5. DESCRIPTION OF TEST MODES

The EUT (**Two-way radio**) has been tested under normal operating condition. (FRS TX) are chosen for testing at each channel separation.

NO.	TEST MODE DESCRIPTION	CHANNEL SEPARATION		
1	FRS TX CHANNEL 4	12.5 kHz		
2	FRS TX CHANNEL 11	12.5 kHz		
3	FRS TX CHANNEL 19	12.5 kHz		

Note:

- 1. Only the result of the worst case was recorded in the report, if no other cases.
- 2. The battery is full-charged during the test.
- 3. For Radiated Emission, 3axis were chosen for testing for each applicable mode.
- 4. Manufacturers use computer PC programming software to switch and operate frequency points, refer to the instructions for details

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Factorization Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written appropriation of AGC where the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Page 16 of 36

6.FREQUENCY STABILITY

6.1 PROVISIONS APPLICABLE

Each FRS transmitter type must be designed such that the carrier frequencies remain within ±2.5 parts-per-million (ppm) of the channel center frequencies specified in §95.563 during normal operating conditions.

6.2 MEASUREMENT PROCEDURE


6.2.1 Frequency stability versus environmental temperature

- 1. Setup the configuration per figure 1 for frequencies measurement inside an environment chamber, Install new battery in the EUT.
- 2. Turn on EUT and set SA center frequency to the EUT radiated frequency. Set SA Resolution Bandwidth to 1kHz and Video Resolution Bandwidth to 1kHz and Frequency Span to 50kHz.Record this frequency as reference frequency.
- 3. Set the temperature of chamber to 50 °C. Allow sufficient time (approximately 30 min) for the temperature of the chamber to stabilize. While maintaining a constant temperature inside the chamber, turn the EUT on and measure the EUT operating frequency.
- 4. Repeat step 2 with a 10℃ decreased per stage until the lowest temperature -30℃ is measured, record all measured frequencies on each temperature step.

6.2.2 Frequency stability versus input voltage

- Setup the configuration per figure 1 for frequencies measured at temperature if it is within 15℃ to 25℃.
 Otherwise, an environment chamber set for a temperature of 20℃ shall be used. The EUT shall be powered by DC 3.7V.
- 2. Set SA center frequency to the EUT radiated frequency. Set SA Resolution Bandwidth to 1 kHz and Video Resolution Bandwidth to 1kHz. Record this frequency as reference frequency.
- 3. Supply the EUT primary voltage at the operating end point which is specified by manufacturer and record the frequency.

6.3 MEASUREMENT SETUP

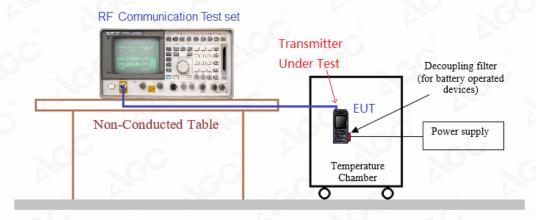

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Pesting/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written exporization of AGC, he test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc=cert.com.



Page 17 of 36

6.4 MEASUREMENT RESULTS

	12.5 kHz Ch	annel Separation, F	M modulation, Ass	igned Frequency	For FRS	
Test	conditions	Fi	equency error (ppr	n)		
Voltage	Temp	Te	est Frequency (MH	z)	Limit (ppm)	Result
(V)	(℃)	462.6375	462.6375 467.6375 462.6500		(86)	
	-30	0.836	0.653	0.694	100	- 0
	-20	0.567	0.640	0.957		
	-10	1.054	1.014	1.021	8	
	0	0.942	0.688	0.900		Pass
3.70	10	1.035	0.662	0.814		
	20	0.996	0.605	0.857	2.5	
	30	1.031	0.597	0.537		8
	40	1.010	0.509	0.570		
	50	0.787	0.670	0.841		
4.26	20	0.726	0.545	0.536	8	©
3.15	20	0.600	0.807	0.654	100	a.C

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Festing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Page 18 of 36

7. EMISSION BANDWIDTH

7.1 PROVISIONS APPLICABLE

FCC Part 95.573: FRS: The authorized bandwidth for an FRS unit is 12.5 kHz.

Occupied Bandwidth (Section 2.1049, 95.573): The EUT was connected to the audio signal generator and the spectrum analyzer via the main RF connector, and through an appropriate attenuator. The EUT was controlled to transmit its maximum power. Then the bandwidth of 99% power can be measured by the spectrum analyzer.

7.2 MEASUREMENT PROCEDURE

1.The EUT was modulated by 2.5kHz sine wave audio signal; the level of the audio signal employed is 16dB greater than that necessary to produce 50% of rated system deviation.

Rated system deviation is 2.5 kHz for 12.5kHz channel spacing).

2.Spectrum set as follow:

Centre frequency = fundamental frequency, span=50kHz for 12.5kHz channel spacing, RBW=300Hz, VBW=1KHz, Sweep = auto,


Detector function = peak, Trace = max hold

- 3.Set 99% Occupied Bandwidth and 26dB Occupied Bandwidth.
- 4. Measure and record the results in the test report.

7.3 MEASUREMENT SETUP





Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the continuous process. Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc~cert.com.







RADIATED BELOW1GHZ

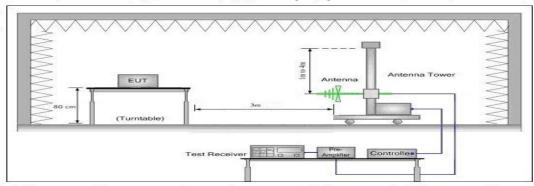

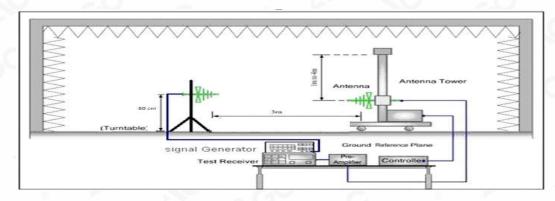

RADIATED ABOVE 1 GHZ

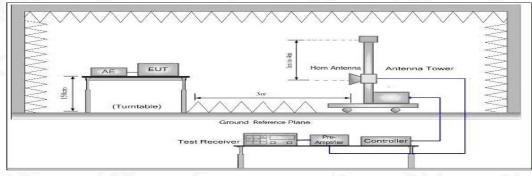

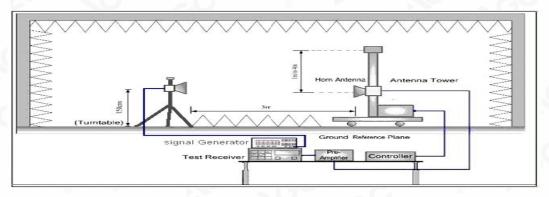

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the specificated resting/inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the writter pathorization of AGC, the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.




Page 20 of 36

7.4 MEASUREMENT RESULTS

Emission Bandwidth Measurement Result-FRS									
Operating Frequency	12.5 kHz Channel Separation								
Operating Frequency	Occupied Bandwidth	Emission Bandwidth	Limits	Result					
462.6375 MHz	9.954 kHz	10.58 kHz	12.5 kHz	Pass					
462.6500 MHz	9.961 kHz	10.57 kHz	12.5 kHz	Pass					
467.6375 MHz	9.959 kHz	10.56 kHz	12.5 kHz	Pass					

Test plot as follows:

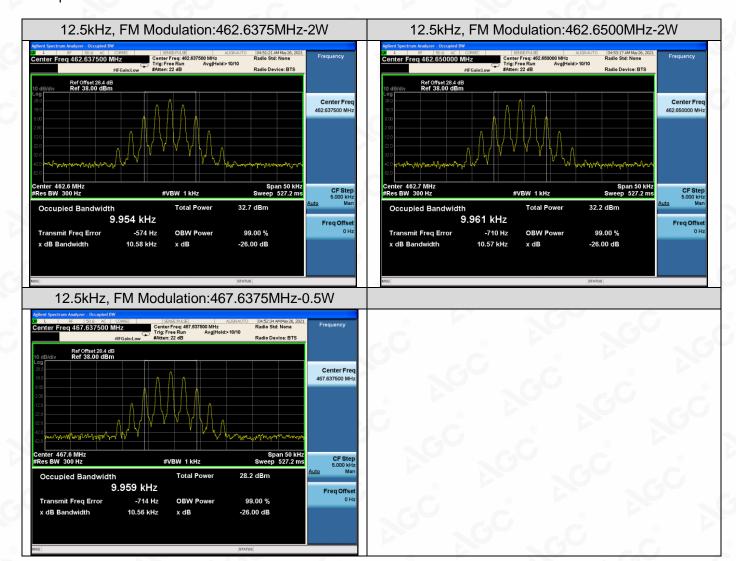

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Bedicated Pesting/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written exchorization of AGC The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Report No.: AGC02294210504FE10 Page 21 of 36

8. SPURIOUS RATIATED EMISSION

8.1 PROVISIONS APPLICABLE

Standard Applicable [FCC Part 95.579] According to FCC section 95.579, the unwanted emission should be attenuated below TP by at least 43+10 log (Transmit Power) Db.

Each FRS transmitter type must be designed to satisfy the applicable unwanted emissions limits in this paragraph.

- (a) Attenuation requirements. The power of unwanted emissions must be attenuated below the carrier power output in Watts (P) by at least:
- (1) 25 dB (decibels) in the frequency band 6.25 kHz to 12.5 kHz removed from the channel center frequency.
- (2) 35 dB in the frequency band 12.5 kHz to 31.25 kHz removed from the channel center frequency.
- (3) 43 + 10 log (P) dB in any frequency band removed from the channel center frequency by more than 31.25 kHz

8.2 MEASUREMENT PROCEDURE

- 1) EUT was placed on a 0.8 or 1.5meter high non-conductive stand at a 3 meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT for emission measurements. The disturbance of the transmitter was maximized on the test receiver display by raising and lowering from 1m to 4m the receive antenna and by rotating through 360° the turntable. After the fundamental emission was maximized, a field strength measurement was made. The radiated emission measurements of all transmit frequencies in all channels were measured with peak detector.
- 2) A log-periodic antenna or double-ridged waveguide horn antenna shall be substituted in place of the EUT. The log-periodic antenna will be driven by a signal generator and the level will be adjusted till the same power value on the spectrum analyzer or receiver. The level of the spurious emissions can be calculated through the level of the signal generator, cable loss, the gain of the substitution antenna and the reading of the spectrum analyzer or receiver.
- 3) The EUT is then put into continuously transmitting mode at its maximum power level during the test. Set Test Receiver or Spectrum RBW=1MHz, VBW=3MHz for above 1GHz and RBW=100kHz, VBW=300kHz for 30MHz to 1GHz, And the maximum value of the receiver should be recorded as (Pr).
- 4) The EUT shall be replaced by a substitution antenna. In the chamber, an substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power (PMea) is applied to the input of the substitution antenna, and adjust the level of the signal generator output until the value of the receiver reach the previously recorded (Pr). The power of signal source (PMea) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.
- 5) A amplifier should be connected to the Signal Source output port. And the cable should be connect between the Amplifier and the Substitution Antenna. The cable loss (PcI) ,the Substitution Antenna Gain

Any report hand the Amplified Gain (PAg) should be recorded after here not been stamped by the Bedicated restriction Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written portionization of AGC, the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issued by the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.





Report No.: AGC02294210504FE10 Page 22 of 36

- 6) The measurement results are obtained as described below: Power(EIRP)=PMea- PAg Pcl Ga The measurement results are amend as described below:Power(EIRP)=PMea- Pcl Ga
- 7) This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15 dBi) and known input power.
- 8) ERP can be calculated from EIRP by subtracting the gain of the dipole, ERP = EIRP-2.15dBi.
- 9) Test the EUT in the lowest channel, the middle channel the Highest channel


8.3 MEASUREMENT SETUP

RADIATED BELOW1GHZ

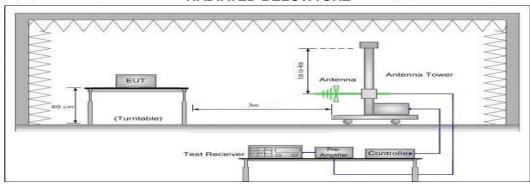

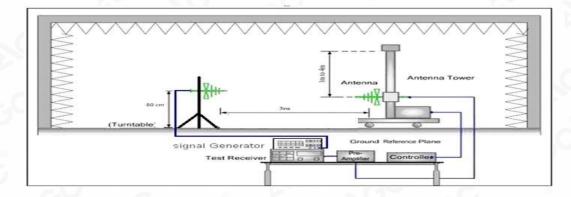



Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the coefficient responsible to the stamp. Stamp is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the writter pathorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.





RADIATED ABOVE 1 GHZ

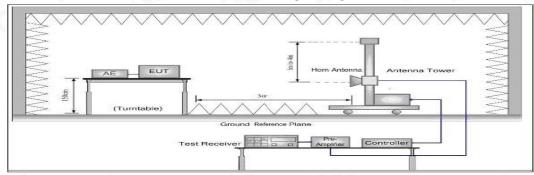

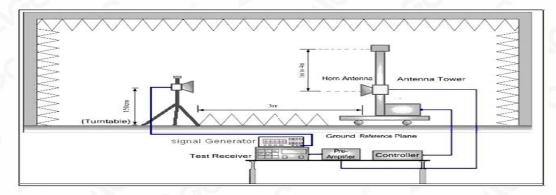

8.4 MEASUREMENT RESULTS


Preliminary calculation	Final Result
At least 43+10 log (P) =43+10log (2) =46.01(dB)	Limit=P- Preliminary calculation=33.01-46.01=-13dBm
At least 43+10 log (P) =43+10log (0.5) =43.00 (dB)	Limit=P- Preliminary calculation=30.00-43.00=-13dBm

- 1. Factor=Antenna Factor + Cable loss. (Below 1GHz)
- 2. Factor=Antenna Factor+ Cable loss -Pre-amplifier. (Above 1 GHz)
- 3. Margin=Limit- Level


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the specificated resting/inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the writter pathorization of AGC, the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.





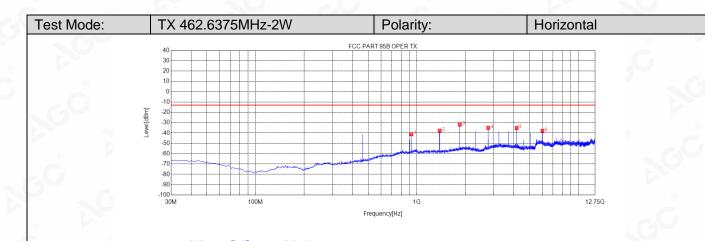


NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Angle [°]	Polarity		
1	925.3100	-84.63	-41.14	-13.00	28.14	43.49	198	Horizontal		
2	1387.7888	-34.41	-37.86	-13.00	24.86	-3.45	29	Horizontal		
3	1850.7851	-31.28	-31.87	-13.00	18.87	-0.59	328	Horizontal		
4	2775.6026	-36.22	-35.05	-13.00	22.05	1.17	351	Horizontal		
5	4163.4163	-39.48	-35.15	-13.00	22.15	4.33	8	Horizontal		
6	6014.2264	-48.89	-38.07	-13.00	25.07	10.82	212	Horizontal		

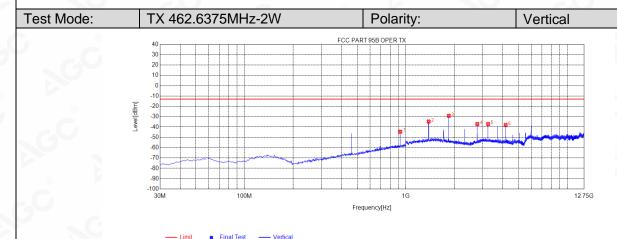


N	IO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Angle [°]	Polarity
	1	925.3100	-88.09	-44.52	-13.00	31.52	43.57	291	Vertical
	2	1387.7888	-36.05	-34.64	-13.00	21.64	1.41	187	Vertical
	3	1850.7851	-30.12	-29.19	-13.00	16.19	0.93	161	Vertical
	4	2775.6026	-38.36	-37.08	-13.00	24.08	1.28	1	Vertical
	5	3238.5989	-40.25	-37.11	-13.00	24.11	3.14	351	Vertical
	6	4163.4163	-41.26	-38.05	-13.00	25.05	3.21	44	Vertical


Any leport having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Stedicated Restriction of Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the writter authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc=cert.com.





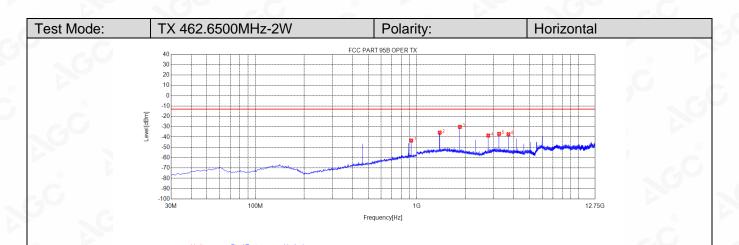


	NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Angle [°]	Polarity
	1	925.3100	-85.16	-41.67	-13.00	28.67	43.49	224	Horizontal
	2	1387.7888	-34.29	-37.74	-13.00	24.74	-3.45	28	Horizontal
1	3	1850.7851	-32.66	-33.25	-13.00	20.25	-0.59	7	Horizontal
	4	2775.6026	-38.23	-37.06	-13.00	24.06	1.17	0	Horizontal
	5	3238.5989	-39.58	-35.87	-13.00	22.87	3.71	351	Horizontal
	6	3701.5952	-41.25	-36.84	-13.00	23.84	4.41	40	Horizontal

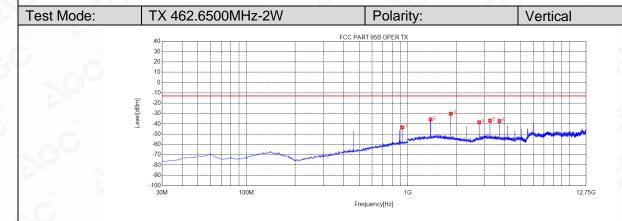


NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Angle [°]	Polarity
1	925.3100	-86.98	-43.41	-13.00	30.41	43.57	9	Vertical
2	1387.7888	-37.15	-35.74	-13.00	22.74	1.41	360	Vertical
3	1850.7851	-31.14	-30.21	-13.00	17.21	0.93	162	Vertical
4	2775.6026	-39.81	-38.53	-13.00	25.53	1.28	44	Vertical
5	3238.5989	-40.11	-36.97	-13.00	23.97	3.14	334	Vertical
6	3701.5952	-40.49	-37.34	-13.00	24.34	3.15	18	Vertical


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the specificated resting/inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the writter pathorization of AGC, the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.





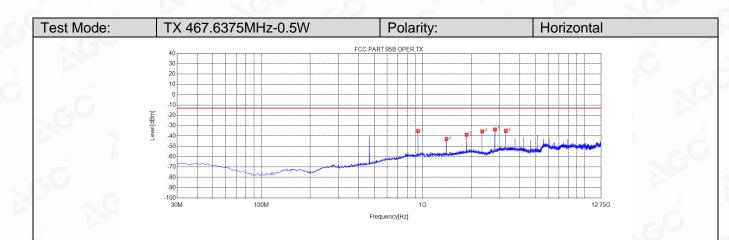

NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Angle [°]	Polarity
1	935.9800	-78.89	-35.17	-13.00	22.17	43.72	145	Horizontal
2	1403.0653	-39.57	-42.98	-13.00	29.98	-3.41	53	Horizontal
3	1870.7621	-38.24	-38.68	-13.00	25.68	-0.44	350	Horizontal
4	2338.4588	-34.72	-35.52	-13.00	22.52	-0.80	350	Horizontal
5	2806.1556	-35.14	-33.68	-13.00	20.68	1.46	342	Horizontal
6	3273.8524	-38.88	-35.10	-13.00	22.10	3.78	317	Horizontal

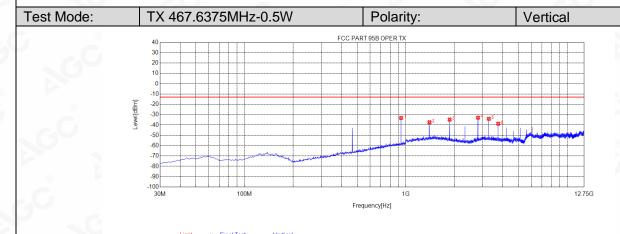

NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Angle [°]	Polarity
1	935.9800	-76.82	-33.14	-13.00	20.14	43.68	175	Vertical
2	1403.0653	-38.87	-37.35	-13.00	24.35	1.52	9	Vertical
3	1870.7621	-35.64	-34.78	-13.00	21.78	0.86	175	Vertical
4	2806.1556	-34.47	-32.93	-13.00	19.93	1.54	9	Vertical
5	3273.8524	-37.08	-33.95	-13.00	20.95	3.13	344	Vertical
6	3741.5492	-41.90	-38.73	-13.00	25.73	3.17	1	Vertical

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Stadicated Teating/Inspection" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written application of AGC, the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.




Page 27 of 36


8.5 EMISSION MASK PLOT

The detailed procedure employed for Emission Mask measurements are specified as following:

- -Connect the equipment as illustrated.
- -Spectrum set as follow:
- 1. Centre frequency = fundamental frequency, Span=50kHz for 12.5kHz, RBW=300Hz, VBW=1000Hz;
- 2. Sweep = auto, Detector function = peak, Trace = max hold
- 3. Key the transmitter, and set the level of the unmodulated carrier to a full scale reference line. This is the 0dB reference for the measurement.
- 4. Modulate the transmitter with a 2500 Hz sine wave at an input level 16 dB greater than that necessary to produce 50% of rated system deviation (Rated system deviation is 2.5 kHz for 12.5kHz channel spacing).
 The input level shall be established at the frequency of maximum response of the audio modulating circuit.
- 5. Transmitters employing digital modulation techniques that bypass the limiter and the audio low-pass filter shall be modulated as specified by the manufacturer.
- 6. Measure and record the results in the test report.

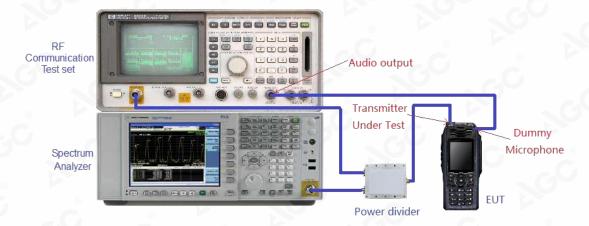


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Feat (Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of ACC the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuence of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.





Test plot as follows:

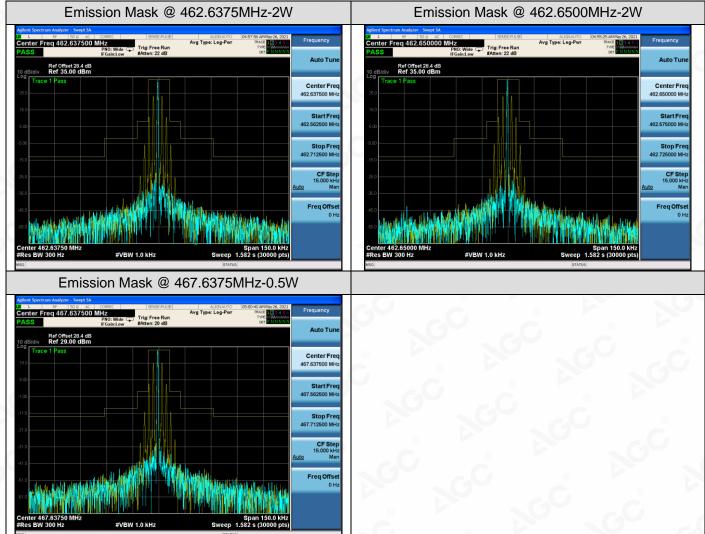

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written pathorization of AGC, the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Report No.: AGC04447210503FE10

Page 29 of 36

9. MAXIMUMN TRANSMITTER POWER

9.1 PROVISIONS APPLICABLE

Each FRS transmitter type must be designed such that the effective radiated power (ERP) on channels 8 through 14 does not exceed 0.5 Watts and the ERP on channels 1 through 7 and 15 through 22 does not exceed 2.0 Watts.

9.2 MEASUREMENT METHOD

- 1) EUT was placed on a 0.8 or 1.5meter high non-conductive stand at a 3 meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT for emission measurements. The disturbance of the transmitter was maximized on the test receiver display by raising and lowering from 1m to 4m the receive antenna and by rotating through 360° the turntable. After the fundamental emission was maximized, a field strength measurement was made. The radiated emission measurements of all transmit frequencies in all channels were measured with peak detector.
- 2) A log-periodic antenna or double-ridged waveguide horn antenna shall be substituted in place of the EUT. The log-periodic antenna will be driven by a signal generator and the level will be adjusted till the same power value on the spectrum analyzer or receiver. The level of the spurious emissions can be calculated through the level of the signal generator, cable loss, the gain of the substitution antenna and the reading of the spectrum analyzer or receiver.
- 3) The EUT is then put into continuously transmitting mode at its maximum power level during the test. Set Test Receiver or Spectrum RBW=1MHz, VBW=3MHz for above 1GHz and RBW=100kHz, VBW=300kHz for 30MHz to 1GHz, And the maximum value of the receiver should be recorded as (Pr).
- 4) The EUT shall be replaced by a substitution antenna. In the chamber, an substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power (PMea) is applied to the input of the substitution antenna, and adjust the level of the signal generator output until the value of the receiver reach the previously recorded (Pr). The power of signal source (PMea) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.
- 5) A amplifier should be connected to the Signal Source output port. And the cable should be connect between the Amplifier and the Substitution Antenna. The cable loss (PcI) ,the Substitution Antenna Gain (Ga) and the Amplifier Gain (PAg) should be recorded after test
- 6) The measurement results are obtained as described below: Power(EIRP)=PMea- PAg Pcl Ga The measurement results are amend as described below:Power(EIRP)=PMea- Pcl Ga
- 7) This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15 dBi) and known input power.

Any report having not usen signed by authorized approver, or having usen altered without authorized by the dipole ERP in the dipole ERP in the dipole ERP in the dipole ERP in the dipole is an interest without authorized approver, or having usen altered without authorized by the dipole in the report is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the writter portionization of AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.





9) Test the EUT in the lowest channel, the middle channel the Highest channel

9.3 MEASUREMENT SETUP


EFFECTIVE RADIATED POWER:


Radiated Below1GHz

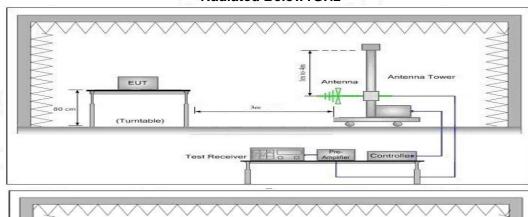

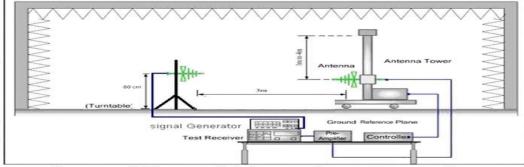

Radiated Above 1 GHz

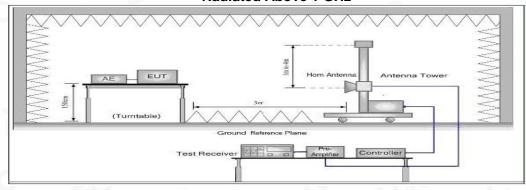

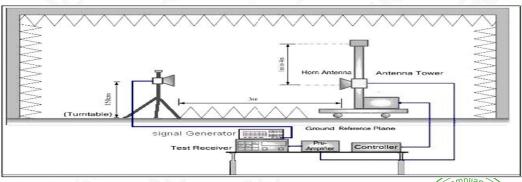

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Feating/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC when the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issued of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Report No.: AGC04447210503FE10

Page 31 of 36

9.4 MEASUREMENT RESULTS


ERP RESULT:

LINI INLOGE	TREGOET:											
Frequency	Reading Level	Antenna	S.G.	Cable Loss	Ant.Gain	Emission Level	Emission Level	Limit	Margin			
(MHz)	(dBuv/m)	Polarization	(dBm)	(dB)	(dBi)	(dBm)	(W)	(W)	(W)			
ChannelSeparation:12.5KHz												
462.6375	101.88	V	26.69	0.38	6.6	32.87	1.94	2	0.06			
462.6375	101.83	⊚ H	26.61	0.38	6.6	32.82	1.91	2	0.09			
462.6500	101.89	V	26.67	0.38	6.6	32.88	1.94	2	0.06			
462.6500	101.75	Н	26.59	0.38	6.6	32.74	1.88	2	0.12			
467.6375	95.87	V	20.64	0.38	6.6	26.86	0.49	0.5	0.01			
467.6375	95.76	H®	20.53	0.38	6.6	26.75	0.47	0.5	0.03			

NOTE: 1. Calculation Formula: Emission Level(dBm) = S.G. (dBm)- Cable Loss(dB)+ Ant.Gain(dBi)

2. The Ant. Gain including the correct factor 2.15

3.Margin (dB) = Limit(dBm)- Emission Level(dBm)





10.MODULATION CHARACTERISTICS

10.1 PROVISIONS APPLICABLE

According to FCC§2.1047 and §95.575, for Voice Modulation Communication Equipment, the frequency response of the audio modulation circuit over a range of 100 to 5000Hz shall be measured.

Each FRS transmitter type must be designed such that the peak frequency deviation does not exceed 2.5 kHz, and the highest audio frequency contributing substantially to modulation must not exceed 3.125 kHz.

10.2 MEASUREMENT METHOD

10.2.1 Modulation Limit

- (1). Configure the EUT as shown in figure 1, adjust the audio input for 60% of rated system deviation at 1kHz using this level as a reference (0dB) and vary the input level from –20 to +20dB. Record the frequency deviation obtained as a function of the input level.
- (2). Repeat step 1 with input frequency changing to 300, 1000, 1500 and 3000Hz in sequence.

10.2.2 Audio Frequency Response

- (1). Configure the EUT as shown in figure 1.
- (2). Adjust the audio input for 20% of rated system deviation at 1 kHz using this level as a reference (0 dB).
- (3). Vary the Audio frequency from 100 Hz to 10 kHz and record the frequency deviation.
- (4). Audio Frequency Response = 20log10 (Deviation of test frequency/Deviation of 1 kHz reference).

10.3 MEASUREMENT SETUP




Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the continuous process. Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc~cert.com.



10.4 MEASUREMENT RESULTS

(A). MODULATION LIMIT:

40 Eld II. EM modulation. Assigned Engage as 400 CE00MI II. 0VV					
12.5kHz, FM modulation, Assigned Frequency:462.6500MHz-2W					
Modulation Level (dB)	Peak Freq. Deviation At 300 Hz (kHz)	Peak Freq. Deviation At 1000 Hz (kHz)	Peak Freq. Deviation At 1500 Hz (kHz)	Peak Freq. Deviation At 3000 Hz (kHz)	
-20	0.15	0.46	0.83	1.05	
-15	0.36	0.61	1.07	1.23	
-10	0.42	0.78	1.13	1.42	
-5	0.47	0.82	1.24	1.55	
0	0.74	1.11	1.45	1.67	
+5	0.96	1.31	1.63	1.83	
+10	1.05	1.38	1.62	1.89	
+15	1.12	1.41	1.65	1.94	
+20	1.11	1.39	1.59	1.85	

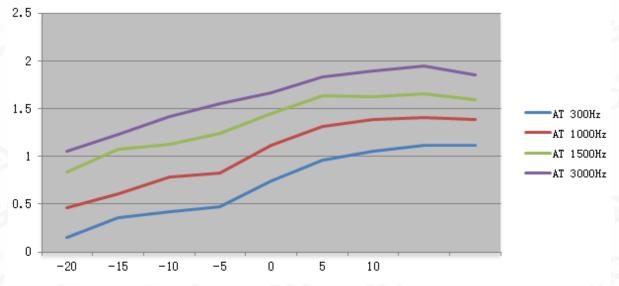


Note: All the modes had been tested, but only the worst data recorded in the report

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Pesting/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the writter authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



(B). AUDIO FREQUENCY RESPONSE:

12.5kHz, Analog modulation, Assigned Frequency:462.6500MHz-2W				
Frequency (Hz)	Deviation (kHz)	Audio Frequency Response(dB)		
100	- C °			
200				
300	0.17	-12.42		
400	0.25	-9.07		
500	0.31	-7.20		
600	0.38	-5.43		
700	0.42	-4.56		
800	0.53	-2.54		
900	0.59	-1.61		
1000	0.71	0.00		
1200	0.77	0.70		
1400	0.89	1.96		
1600	0.98	2.80		
1800	1.06	3.48		
2000	1.25	4.91		
2400	1.38	5.77		
2500	1.46	6.26		
2800	1.58	6.95		
3000	1.72	7.69		

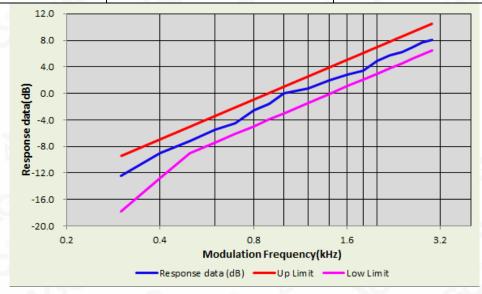


Note: All the modes had been tested, but only the worst data recorded in the report.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Pesting/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the writter authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc~cert.com.



APPENDIX I: PHOTOGRAPHS OF TEST SETUP

RADIATED EMISSION TEST SETUP

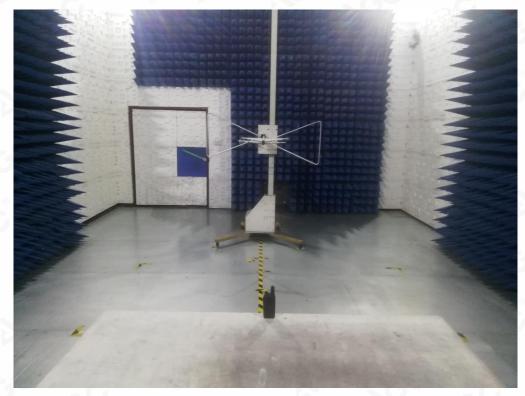

RADIATED EMISSION ABOVE 1G TEST SETUP



Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the specificated resting/inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the writter pathorization of AGC, the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Report No.: AGC04447210503FE10

Page 36 of 36

APPENDIX II: PHOTOGRAPHS OF TEST EUT

Refer to the Report No.: AGC04447210503AP01

----END OF REPORT----

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the special pedicated fresh dynaspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the writter appropriation of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Conditions of Issuance of Test Reports

- 1. All samples and goods are accepted by the Attestation of Global Compliance (Shenzhen) Co., Ltd (the "Company") solely for testing and reporting in accordance with the following terms and conditions. The company provides its services on the basis that such terms and conditions constitute express agreement between the company and any person, firm or company requesting its services (the "Clients").
- 2. Any report issued by Company as a result of this application for testing services (the "Report") shall be issued in confidence to the Clients and the Report will be strictly treated as such by the Company. It may not be reproduced either in its entirety or in part and it may not be used for advertising or other unauthorized purposes without the written consent of the Company. The Clients to whom the Report is issued may, however, show or send it, or a certified copy thereof prepared by the Company to its customer, supplier or other persons directly concerned. The Company will not, without the consent of the Clients, enter into any discussion or correspondence with any third party concerning the contents of the Report, unless required by the relevant governmental authorities, laws or court orders.
- 3.The Company shall not be called or be liable to be called to give evidence or testimony on the Report in a court of law without its prior written consent, unless required by the relevant governmental authorities, laws or court orders.
- 4. The non-CMA report issued by AGC is only permitted to be used by the client as internal reference use and shall not be used for public demonstration purpose.
- 5. In the event of the improper use of the report as determined by the Company, the Company reserves the right to withdraw it, and to adopt any other additional remedies which may be appropriate.
- 6. Samples submitted for testing are accepted on the understanding that the Report issued cannot form the basis of, or be the instrument for, any legal action against the Company.
- 7. The Company will not be liable for or accept responsibility for any loss or damage however arising from the use of information contained in any of its Reports or in any communication whatsoever about its said tests or investigations.
- 8. Clients wishing to use the Report in court proceedings or arbitration shall inform the Company to that effect prior to submitting the sample for testing.
- 9. The Company is not responsible for recalling the electronic version of the original report when any revision is made to them. The Client assumes the responsibility to providing the revised version to any interested party who uses them.
- 10. Subject to the variable length of retention time for test data and report stored hereinto as otherwise specifically required by individual accreditation authorities, the Company will only keep the supporting test data and information of the test report for a period of six years. The data and information will be disposed of after the aforementioned retention period has elapsed. Under no circumstances shall we provide any data and information which has been disposed of after retention period. Under no circumstances shall we be liable for damage of any kind, including (but not limited to) compensatory damages, lost profits, lost data, or any form of special, incidental, indirect, consequential or punitive damages of any kind, whether based on breach of contract of warranty, tort (including negligence), product liability or otherwise, even if we are informed in advance of the possibility of such damages.

he test report.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the /Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the writter enhorization of AGE The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15da Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.