

## FCC TEST REPORT

For

Shenzhen Kerui Smart Technology Co., Ltd

Kr-G19 alarm system

Model No.: Kr-G19

Prepared for : Shenzhen Kerui Smart Technology Co., Ltd  
Address : Floor 2nd&3rd, Building B5, Xinhaosheng Industrial Zone, Yonghe Road, Qiaotou Fuyong Subdistrict, Bao'an District, Shenzhen, Guangdong, China

Prepared by : Shenzhen LCS Compliance Testing Laboratory Ltd.  
Address : 1/F., Xingyuan Industrial Park, Tongda Road, Bao'an Avenue, Bao'an District, Shenzhen, Guangdong, China

Tel : (+86)755-82591330  
Fax : (+86)755-82591332  
Web : www.LCS-cert.com  
Mail : webmaster@LCS-cert.com

Date of receipt of test sample : October 21, 2015  
Number of tested samples : 1  
Serial number : Prototype  
Date of Test : October 21, 2015 – December 08, 2015  
Date of Report : December 08, 2015

**FCC TEST REPORT**  
**FCC CFR 47 PART 15 C(15.231): 2014**

**Report Reference No. .... : LCS1510211019E**

Date of Issue ..... : December 08, 2015

**Testing Laboratory Name ..... : Shenzhen LCS Compliance Testing Laboratory Ltd.**

Address ..... : 1/F., Xingyuan Industrial Park, Tongda Road, Bao'an Avenue,  
Bao'an District, Shenzhen, Guangdong, China

Testing Location/ Procedure ..... : Full application of Harmonised standards   
 Partial application of Harmonised standards   
 Other standard testing method

**Applicant's Name..... : Shenzhen Kerui Smart Technology Co., Ltd**

Address ..... : Floor 2nd&3rd, Building B5, Xinhaosheng Industrial Zone,  
Yonghe Road, Qiaotou Fuyong Subdistrict, Bao'an District,  
Shenzhen, Guangdong, China

**Test Specification**

Standard ..... : FCC CFR 47 PART 15 Subpart C : 2014

**Test Report Form No..... : LCSEMC-1.0**

TRF Originator ..... : Shenzhen LCS Compliance Testing Laboratory Ltd.

Master TRF..... : Dated 2011-03

**Shenzhen LCS Compliance Testing Laboratory Ltd. All rights reserved.**

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen LCS Compliance Testing Laboratory Ltd. is acknowledged as copyright owner and source of the material. Shenzhen LCS Compliance Testing Laboratory Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

**Test Item Description. .... : Kr-G19 alarm system**

Trade Mark ..... : Kerui

Model/ Type reference..... : Kr-G19

Working voltage ..... : DC 3.7V by battery

Result ..... : **Positive**

**Compiled by:**

*Jacky Li*

Jacky Li/ File administrators

**Supervised by:**

*Glin Lu*

Glin Lu/ Technique principal

**Approved by:**

*Gavin Liang*

Gavin Liang/ Manager

# FCC--TEST REPORT

<b>Test Report No. : LCS1510211019E</b>	<u>December 08, 2015</u> Date of issue
---	---

Type / Model.....	: Kr-G19
EUT.....	: Kr-G19 alarm system
<b>Applicant.....</b>	<b>: Shenzhen Kerui Smart Technology Co., Ltd</b>
Address.....	: Floor 2nd&3rd, Building B5, Xinhaosheng Industrial Zone, Yonghe Road, Qiaotou Fuyong Subdistrict, Bao'an District, Shenzhen, Guangdong, China
Telephone.....	: +86-755-29927635
Fax.....	: +86-755-81454296
<b>Manufacturer.....</b>	<b>: Shenzhen Kerui Smart Technology Co., Ltd</b>
Address.....	: Floor 2nd&3rd, Building B5, Xinhaosheng Industrial Zone, Yonghe Road, Qiaotou Fuyong Subdistrict, Bao'an District, Shenzhen, Guangdong, China
Telephone.....	: +86-755-29927635
Fax.....	: +86-755-81454296
<b>Factory.....</b>	<b>: Shenzhen Kerui Smart Technology Co., Ltd</b>
Address.....	: Floor 2nd&3rd, Building B5, Xinhaosheng Industrial Zone, Yonghe Road, Qiaotou Fuyong Subdistrict, Bao'an District, Shenzhen, Guangdong, China
Telephone.....	: +86-755-29927635
Fax.....	: +86-755-81454296

<b>Test Result</b>	<b>Positive</b>
--------------------	-----------------

The test report merely corresponds to the test sample.

It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

## TABLE OF CONTENTS

<b>1. GENERAL INFORMATION.....</b>	<b>5</b>
1.1. DESCRIPTION OF DEVICE (EUT) .....	5
1.2. OBJECTIVE .....	5
1.3. ENVIRONMENTAL CONDITIONS .....	5
1.4. HOST SYSTEM CONFIGURATION LIST AND DETAILS .....	6
1.5. EXTERNAL I/O PORT .....	6
1.6. EUT OPERATION.....	6
1.7. ANTENNA SYSTEM .....	6
1.8. DESCRIPTION OF TEST FACILITY .....	6
1.9. STATEMENT OF THE MEASUREMENT UNCERTAINTY .....	7
<b>2. TEST METHODOLOGY .....</b>	<b>8</b>
2.1. EUT CONFIGURATION.....	8
2.2. EUT EXERCISE.....	8
2.3. GENERAL TEST PROCEDURES.....	8
2.4. INSTRUMENT CALIBRATION .....	8
2.5. TEST MODE.....	8
<b>3. SYSTEM TEST CONFIGURATION.....</b>	<b>9</b>
3.1. JUSTIFICATION .....	9
3.2. EUT EXERCISE SOFTWARE .....	9
3.3. SPECIAL ACCESSORIES .....	9
3.4. BLOCK DIAGRAM/SCHEMATICS .....	9
3.5. EQUIPMENT MODIFICATIONS .....	9
3.6. TEST SETUP.....	9
<b>4. SUMMARY OF TEST RESULTS.....</b>	<b>10</b>
<b>5. TEST ITEMS AND RESULTS .....</b>	<b>11</b>
5.1. TRANSMITTER DEACTIVATION TIME.....	11
5.2. TRANSMITTER FIELD STRENGTH OF EMISSIONS .....	13
5.3. 20dB BANDWIDTH EMISSIONS .....	24
5.4. DUTY CYCLE .....	25
5.5. POWER LINE CONDUCTED EMISSIONS .....	28
5.6. ANTENNA REQUIREMENT.....	31
<b>6. LIST OF MEASURING EQUIPMENTS .....</b>	<b>32</b>

## 1. GENERAL INFORMATION

### 1.1. Description of Device (EUT)

EUT	: Kr-G19 alarm system
Model Number	: Kr-G19
Power Supply	: DC 3.7V by battery
Frequency Range	: 434.07MHz
Number of Channels	: 1
Modulation Type	: ASK
Antenna Type and Gain	: Integral Antenna, 3.0 dBi

### 1.2. Objective

The primary objective of the manufacturer is compliance with Subpart C of Part 15 of FCC Rules for the radiated and conducted emissions of intentional radiators. Certification of these devices is required as a prerequisite to marketing as defined in Part 2 the FCC Rules.

Certification is a procedure where the manufacturer or a contracted laboratory makes measurements and submits the test data and technical information to the FCC. The FCC issues a grant of equipment authorization upon successful completion of their review of the submitted documents. Once the equipment authorization has been obtained, the label indicating compliance must be attached to all identical units, which are subsequently manufactured.

Maintenance of compliance is the responsibility of the manufacturer. Any modification of the product which may result in increased emissions should be checked to ensure compliance has been maintained (i.e., printed circuit board layout changes, different line filter, different power supply, harnessing or I/O cable changes, etc.).

### 1.3. Environmental Conditions

During the measurement the environmental conditions were within the listed ranges:

- Temperature: 15-35 °C
- Humidity: 30-60 %
- Atmospheric pressure: 86-106 kPa

#### 1.4. Host System Configuration List and Details

Manufacturer	Description	Model	Serial Number	Certificate
--	POWER ADAPTER	KR-0510A	--	VOC

#### 1.5. External I/O Port

I/O Port Description	Quantity	Cable
USB	1	1.2m, Shielded
SIREN	1	N/A
Controller connect	1	N/A

#### 1.6. EUT Operation

The EUT was placed in a RF test mode for testing of the transmitter and in normal mode of operation for testing the digital circuitry and receiver. In both modes the carrier current device within the EUT was operational. When we press the button the EUT will transmit one signal and continue transmitting for 0.18s.

#### 1.7. Antenna System

The directional gains of antenna used for transmitting is 3.0dBi, and EUT uses an integral antenna which is permanently attached.

#### 1.8. Description of Test Facility

##### Site Description

EMC Lab. : CNAS Registration Number. is L4595.  
 FCC Registration Number. is 899208.  
 Industry Canada Registration Number. is 9642A-1.  
 VCCI Registration Number. is C-4260 and R-3804.  
 ESMD Registration Number. is ARCB0108.  
 UL Registration Number. is 100571-492.  
 TUV SUD Registration Number. is SCN1081.  
 TUV RH Registration Number. is UA 50296516-001

## 1.9. Statement of The Measurement Uncertainty

ISO Guide 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level and were calculated in accordance with NAMAS document NIS 81.

Test Item	Frequency Range	Uncertainty	Note
Radiation Uncertainty :	9KHz~30MHz	3.10dB	(1)
	30MHz~200MHz	2.96dB	(1)
	200MHz~1000MHz	3.10dB	(1)
	1GHz~26.5GH	4.20dB	(1)
Conduction Uncertainty :	150kHz~30MHz	1.63dB	(1)
Power disturbance :	30MHz~300MHz	1.60dB	(1)

(1). This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of  $k=2$ .

## 2. TEST METHODOLOGY

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

The radiated testing was performed at an antenna-to-EUT distance of 3 meters. All radiated and conducted emissions measurement was performed at Shenzhen LCS Compliance Testing Laboratory Ltd..

### 2.1. EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

### 2.2. EUT Exercise

The EUT was operated in the normal operating mode. The TX frequency that was fixed which was for the purpose of the measurements.

According to its specifications, the EUT must comply with the requirements of the Section 15.203, 15.205, 15.207, 15.209 and 15.231 under the FCC Rules Part 15 Subpart C.

### 2.3. General Test Procedures

#### 2.3.1 Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 6.2.1 of ANSI C63.10-2013 Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using Quasi-peak and average detector modes.

#### 2.3.2 Radiated Emissions

The EUT is placed on a turn table, which is 1.5 m above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna, which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the maximum emissions, exploratory radiated emission measurements were made according to the requirements in Section 6.3 of ANSI C63.10-2013

### 2.4. Instrument Calibration

All test equipment is regularly checked to ensure that performance is maintained in accordance with the manufacturer's specifications. All antennas are calibrated at regular intervals with respect to tuned half-wave dipoles. An exhibit of this report contains the list of test equipment used and calibration information.

### 2.5. Test Mode

The EUT has been tested under engineering mode. The field strength of radiation emission was measured in the following position: EUT stand-up position (Y axis), lie-down position (X, Z axis).

The worst case of X axis was reported.

A new battery supplied DC 3.7V power to the EUT for testing.



### **3. SYSTEM TEST CONFIGURATION**

#### **3.1. Justification**

The system was configured for testing in a continuous transmit condition.

#### **3.2. EUT Exercise Software**

N/A

#### **3.3. Special Accessories**

N/A

#### **3.4. Block Diagram/Schematics**

Please refer to the related document

#### **3.5. Equipment Modifications**

Shenzhen LCS Compliance Testing Laboratory Ltd. has not done any modification on the EUT.

#### **3.6. Test Setup**

Please refer to the test setup photo.

## 4. SUMMARY OF TEST RESULTS

Rules	Description of test	Result
§15.203	Antenna Requirement	Compliant
§15.205	Restricted Band	Compliant
§15.209	General Requirement	Compliant
§15.231 (b)	Radiated Emissions	Compliant
§15.231 (c)	20dB Bandwidth Testing	Compliant
§15.231 (a)(1)	Deactivation Testing	Compliant
§15.231	Duty cycle Factor	Compliant
§15.207	Conducted Emissions	Compliant

*Note: All buttons have been taken into consideration and only worst case reported.*

## 5. TEST ITEMS AND RESULTS

### 5.1. Transmitter Deactivation Time

FCC 15.231 (a)

#### 5.1.1. Limit


A manually operated transmitter shall employ a switch that will automatically deactivate the transmitter within not more than 5 seconds of being released.

#### 5.1.2. Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.


#### 5.1.3. Test Results

Frequency (MHz)	Activation Time (s)	Limit: not more than 5 seconds of being released (s)	Conclusion
434.07	0.18	5	PASS

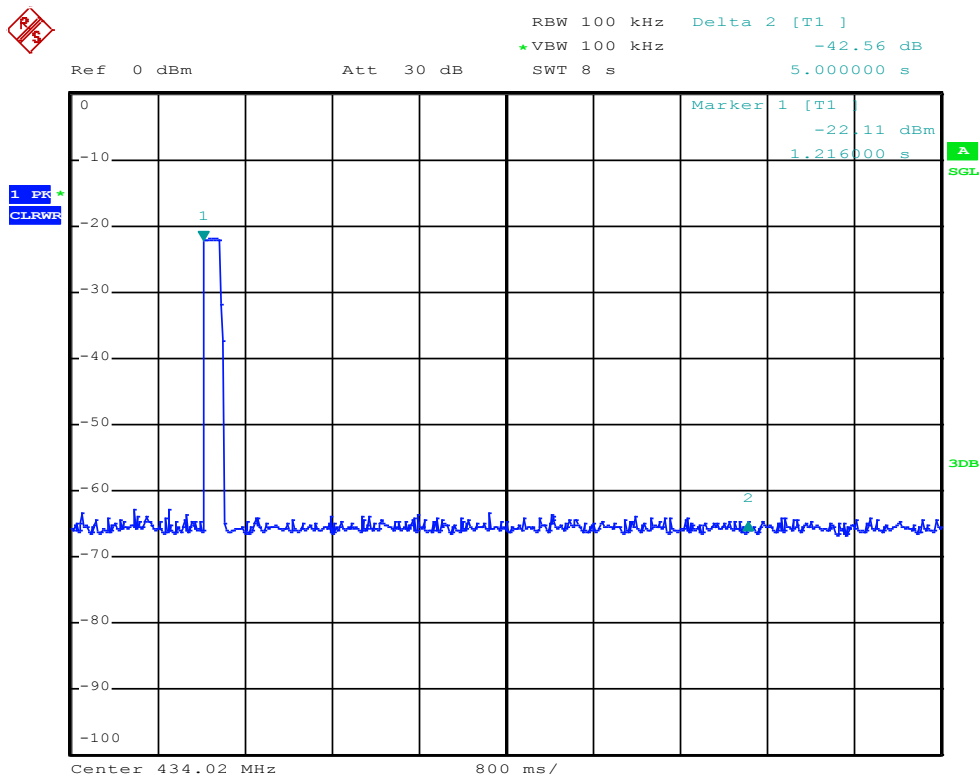



RBW 100 kHz Delta 2 [T1 ]  
\*VBW 100 kHz -32.74 dB  
Ref 0 dBm Att 30 dB SWT 1 s 180.000000 ms

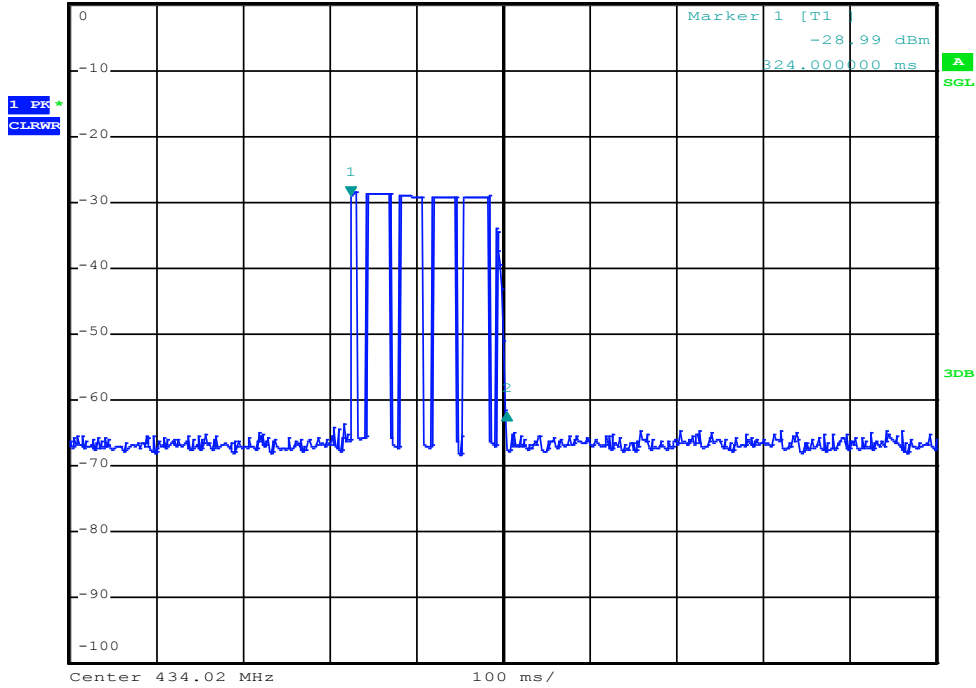

## 5.2. Transmitter Field Strength of Emissions

### 5.2.1. Limit

FCC §15.231 (b)

In addition to the provisions of § 15.205, the field strength of emissions from Intentional radiators operated under this section shall not exceed the following:

Fundamental frequency (MHz)	Field Strength of Fundamental (microvolt/meter)	Field Strength of spurious emissions (microvolt/meter)
40.66-40.70	2,250	225
70-130	1,250	125
130-174	1,250 to 3,370	125 to 375
174-260	3,750	375
260-470	3,750 to 12,500	375 to 1,250
Above 470	12,500	1,250

[Where F is the frequency in MHz, the formulas for calculating the maximum permitted fundamental field strengths are as follows: for the band 130-174 MHz,  $\mu\text{V/m}$  at 3 meters =  $56.81818(F) - 6136.3636$ ; for the band 260-470 MHz,  $\mu\text{V/m}$  at 3 meters =  $41.6667(F) - 7083.3333$ . The maximum permitted unwanted emission level is 20 dB below the maximum permitted fundamental level.]

§15.205 (a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
<sup>1</sup> 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 -	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.52525	2655 - 2900	22.01 - 23.12
8.41425 - 8.41475	156.7 - 156.9	3260 - 3267	23.6 - 24.0
12.29 - 12.293	162.0125 - 167.17	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	167.72 - 173.2	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	240 - 285	3600 - 4400	( <sup>2</sup> )
13.36 - 13.41	322 - 335.4		

1 Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

2 Above 38.6

§15.205 (b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

§15.209 (a) Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009–0.490	2400/F(kHz)	300
0.490–1.705	24000/F(kHz)	30
1.705–30.0	30	30
30–88	100**	3
88–216	150**	3
216–960	200**	3
Above 960	500	3

\*\* Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54 72 MHz, 76 88 MHz, 174 216 MHz or 470 806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

§15.209 (b) In the emission table above, the tighter limit applies at the band edges.

#### 5.2.2. Measuring Instruments and Setting

Please refer to section 6 of equipments list in this report. The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB (Emission in restricted band)	1MHz / 1MHz for Peak, 1 MHz / 10Hz for Average
RB / VB (Emission in non-restricted band)	1MHz / 1MHz for Peak, 1 MHz / 10Hz for Average

Spectrum Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

### 5.2.3. Test Procedures

#### 1) Sequence of testing 9 kHz to 30 MHz

##### **Setup:**

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a rotatable table with 0.8 m height is used.
- If the EUT is a floor standing device, it is placed on the ground.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions.
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 3 meter.
- The EUT was set into operation.

##### **Premeasurement:**

- The turntable rotates from 0 ° to 315 ° using 45 ° steps.
- The antenna height is 0.8 meter.
- At each turntable position the analyzer sweeps with peak detection to find the maximum of all emissions

##### **Final measurement:**

- Identified emissions during the premeasurement the software maximizes by rotating the turntable position (0 ° to 360 °) and by rotating the elevation axes (0 ° to 360 °).
- The final measurement will be done in the position (turntable and elevation) causing the highest emissions with QPK detector.
- The final levels, frequency, measuring time, bandwidth, turntable position, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement and the limit will be stored.

## 2) Sequence of testing 30 MHz to 1 GHz

### Setup:

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a table with 0.8 m height is used, which is placed on the ground plane.
- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 3 meter.
- The EUT was set into operation.

### Premeasurement:

- The turntable rotates from 0 ° to 315 ° using 45 ° steps.
- The antenna is polarized vertical and horizontal.
- The antenna height changes from 1 to 3 meter.
- At each turntable position, antenna polarization and height the analyzer sweeps three times in peak to find the maximum of all emissions.

### Final measurement:

- The final measurement will be performed with minimum the six highest peaks.
- According to the maximum antenna and turntable positions of premeasurement the software maximize the peaks by changing turntable position ( $\pm 45^\circ$ ) and antenna movement between 1 and 4 meter.
- The final measurement will be done with QP detector with an EMI receiver.
- The final levels, frequency, measuring time, bandwidth, antenna height, antenna polarization, turntable angle, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement with marked maximum final measurements and the limit will be stored.



### 3) Sequence of testing 1 GHz to 18 GHz

#### Setup:

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a rotatable table with 1.5 m height is used.
- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 3 meter.
- The EUT was set into operation.

#### Premeasurement:

- The turntable rotates from 0 ° to 315 ° using 45 ° steps.
- The antenna is polarized vertical and horizontal.
- The antenna height scan range is 1 meter to 2.5 meter.
- At each turntable position and antenna polarization the analyzer sweeps with peak detection to find the maximum of all emissions.

#### Final measurement:

- The final measurement will be performed with minimum the six highest peaks.
- According to the maximum antenna and turntable positions of premeasurement the software maximize the peaks by changing turntable position ( $\pm 45^\circ$ ) and antenna movement between 1 and 4 meter. This procedure is repeated for both antenna polarizations.
- The final measurement will be done in the position (turntable, EUT-table and antenna polarization) causing the highest emissions with Peak and Average detector.
- The final levels, frequency, measuring time, bandwidth, turntable position, EUT-table position, antenna polarization, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement with marked maximum final measurements and the limit will be stored.

#### 4) Sequence of testing above 18 GHz

##### Setup:

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a rotatable table with 1.5 m height is used.
- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 1 meter.
- The EUT was set into operation.

##### Premeasurement:


- The antenna is moved spherical over the EUT in different polarisations of the antenna.

##### Final measurement:


- The final measurement will be performed at the position and antenna orientation for all detected emissions that were found during the premeasurements with Peak and Average detector.
- The final levels, frequency, measuring time, bandwidth, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement and the limit will be stored.

#### 5.2.4. Test Setup Layout


For radiated emissions below 30MHz

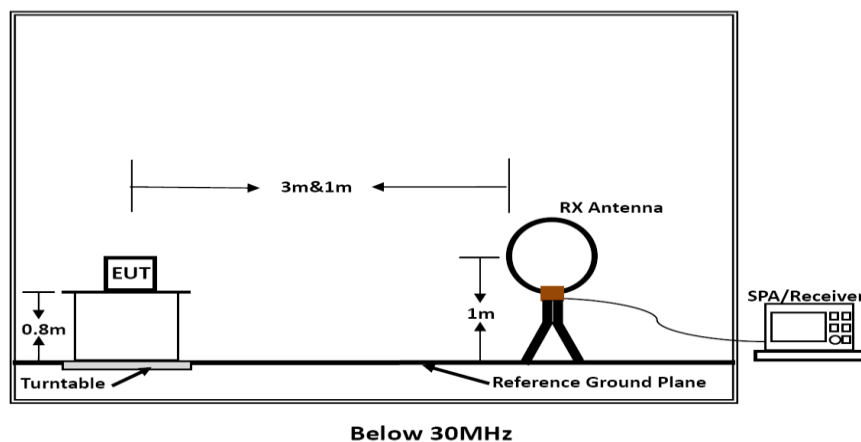

For radiated emissions above 30MHz

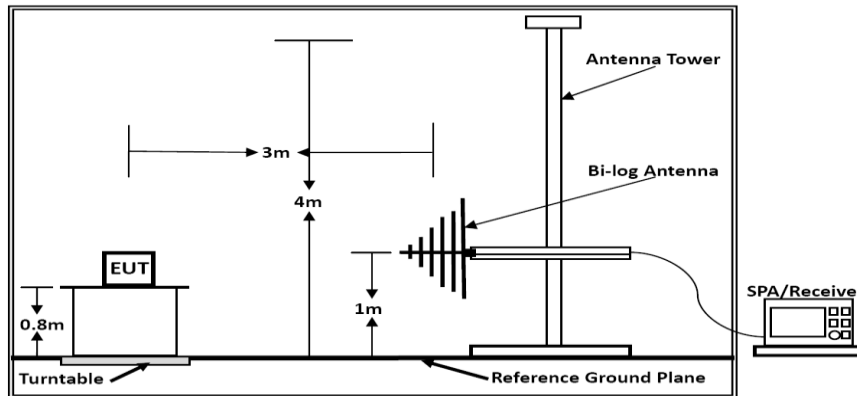

Below 1GHz

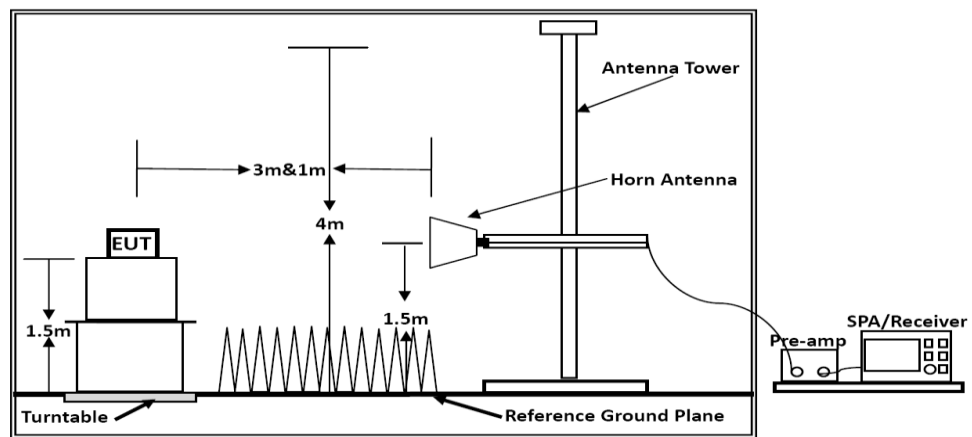

Above 1GHz

Above 10 GHz shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade from 3m to 1.5m.

Distance extrapolation factor =  $20 \log(\text{specific distance [3m]} / \text{test distance [1.5m]})$  (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor [6 dB].

5.2.5. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.Z

## 5.2.6. Results of Radiated Emissions (9kHz~30MHz)

Temperature	25°C	Humidity	60%
Test Engineer	Jacky	Configurations	Automatically

Freq. (MHz)	Level (dBuV)	Over Limit (dB)	Over Limit (dBuV)	Remark
-	-	-	-	See Note

## Note:


The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.

Distance extrapolation factor =  $40 \log(\text{specific distance} / \text{test distance})$  (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor.

5.2.7. Results of Radiated Emissions (30MHz~1GHz)

Temperature	25°C	Humidity	60%
Test Engineer	Jacky	Configurations	Fundamental Emissions

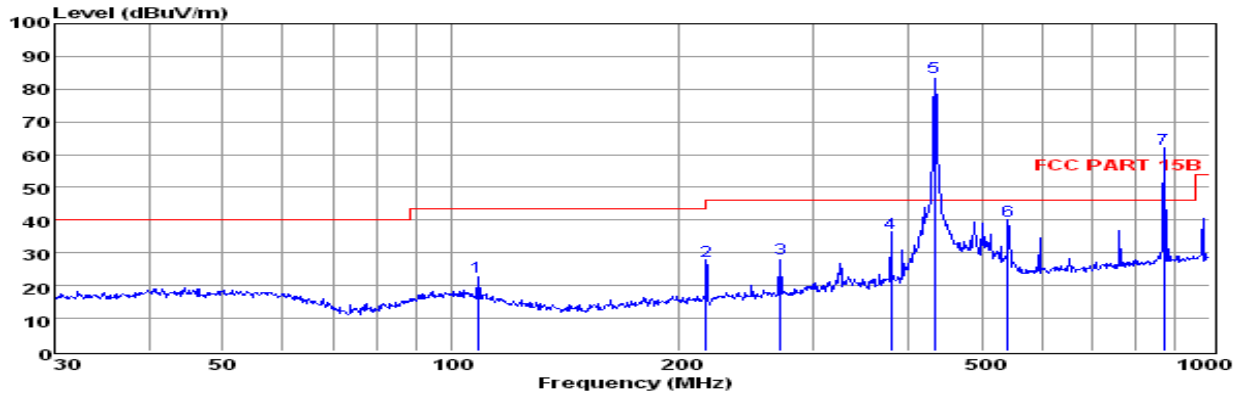


Env./Ins: 24°C/56%  
 pol: VERTICAL

	Freq	Reading	CabLos	Antfac	Measured	Limit	Over	Remark
	MHz	dBuV	dB	dB/m	dBuV/m	dBuV/m	dB	
1	108.27	9.69	0.68	12.41	22.78	43.50	-20.72	QP
2	216.78	15.39	0.88	11.10	27.37	46.00	-18.63	QP
3	271.32	14.78	0.99	12.40	28.17	46.00	-17.83	QP
4	379.91	20.43	1.18	14.59	36.20	46.00	-9.80	QP
5	434.07	66.96	1.18	15.53	83.67	46.00	37.67	Peak
6	541.37	21.06	1.34	17.35	39.75	46.00	-6.25	QP
7	869.13	39.21	1.87	20.77	61.85	46.00	15.85	Peak

- Note: 1. All readings are Quasi-peak values.  
 2. Measured= Reading + Antenna Factor + Cable Loss  
 3. The emission that are 20db below the official limit are not reported

Fundamental and Harmonics QP Result					
Freq(MHz)	Peak Level (dBμV/m)	DC Factor(dBμV/m) (see Section 5.4)	QP Level (dBμV/m)	Limit(dBμV/m) (QP)	Conclusion
434.07	83.67	-7.76	75.91	80.82	PASS
869.13	61.85	-7.76	54.09	60.82	PASS

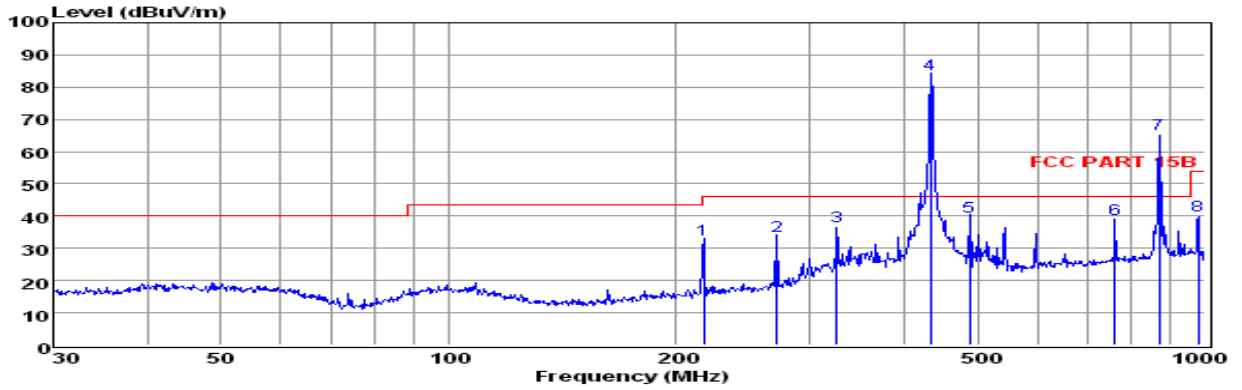

Env./Ins: 24 °C / 56%  
 pol: HORIZONTAL

	Freq MHz	Reading dBuV	CabLos dB	Antfac dB/m	Measured dBuV/m	Limit dBuV/m	Over dB	Remark
1	217.54	20.87	0.88	11.12	32.87	46.00	-13.13	QP
2	271.32	20.48	0.99	12.40	33.87	46.00	-12.13	QP
3	325.60	22.24	1.04	13.55	36.83	46.00	-9.17	QP
4	434.07	67.31	1.18	15.53	84.02	46.00	38.02	Peak
5	489.03	22.26	1.32	16.30	39.88	46.00	-6.12	QP
6	760.70	17.87	1.77	19.57	39.21	46.00	-6.79	QP
7	869.13	42.62	1.87	20.77	65.26	46.00	19.26	Peak
8	979.18	16.37	2.06	21.60	40.03	54.00	-13.97	QP

Note: 1. All readings are Quasi-peak values.  
 2. Measured= Reading + Antenna Factor + Cable Loss  
 3. The emission that are 20db below the official limit are not reported

Fundamental and Harmonics QP Result					
Freq(MHz)	Peak Level (dBμV/m)	DC Factor(dBμV/m) (see Section 5.4)	QP Level (dBμV/m)	Limit(dBμV/m) (QP)	Conclusion
434.07	84.02	-7.76	76.26	80.82	PASS
868.13	65.26	-7.76	57.50	60.82	PASS

## 5.2.8. Results of Radiated Emissions (Above1GHz)

Temperature	25°C	Humidity	60%
Test Engineer	Jacky	Configurations	Harmonics Emissions/ Spurious Emission

**Peak Value :**

Frequency (MHz)	Level (dBuV/m)	Limit Line (dBuV/m)	Over limit (dB)	Polarization
1302.21	60.52	74	-13.48	Horizontal
1736.28	52.36	74	-21.64	Horizontal
1302.21	57.41	74	-16.59	Vertical
1736.28	50.38	74	-23.62	Vertical

**Average Value :**

Frequency (MHz)	Level (dBuV/m)	Duty cycle factor	Average value (dBuV/m)	Limit Line (dBuV/m)	Over limit (dB)	Polarization
1302.21	60.52	-7.76	52.76	54	-1.24	Horizontal
1736.28	52.36	-7.76	44.60	54	-9.40	Horizontal
1302.21	57.41	-7.76	49.65	54	-4.35	Vertical
1736.28	50.38	-7.76	42.62	54	-11.38	Vertical

1. Measuring frequencies from 9k~10th harmonic (ex. 5GHz), No emission found between lowest internal used/generated frequency to 30MHz.
2. Radiated emissions measured in frequency range from 9k~10th harmonic (ex. 5GHz) were made with an instrument using Peak detector mode.
3. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

### 5.3. 20dB Bandwidth Emissions

FCC 15.231 (c)

#### 5.3.1. Limit


The bandwidth of the emission shall be no wider than 0.25% of the center frequency for devices operating above 70 MHz and below 900 MHz. Bandwidth is determined at the points 20 dB down from the modulated carrier.

#### 5.3.2. Test Procedure

With the EUT’s antenna attached, the EUT’s 20dB Bandwidth power was received by the test antenna which was connected to the spectrum analyzer with the START and STOP frequencies set to the EUT’s operation band.

#### 5.3.3. Test Data

Center Frequency of operation MHz	Maximum allowed bandwidth kHz	Measured 20dB bandwidth kHz	Result
434.07	1085.00	58.00	PASS
<b>Maximum allowed bandwidth:</b>	<input checked="" type="checkbox"/> 0.25% of the centre operating frequency <input type="checkbox"/> 0.5% of the centre operating frequency		
<b>RBW:</b>	<input checked="" type="checkbox"/> 10kHz <input type="checkbox"/> 100kHz <input type="checkbox"/> other kHz <b>VBW:</b> <input checked="" type="checkbox"/> 30kHz <input type="checkbox"/> 300kHz <input type="checkbox"/> other kHz		

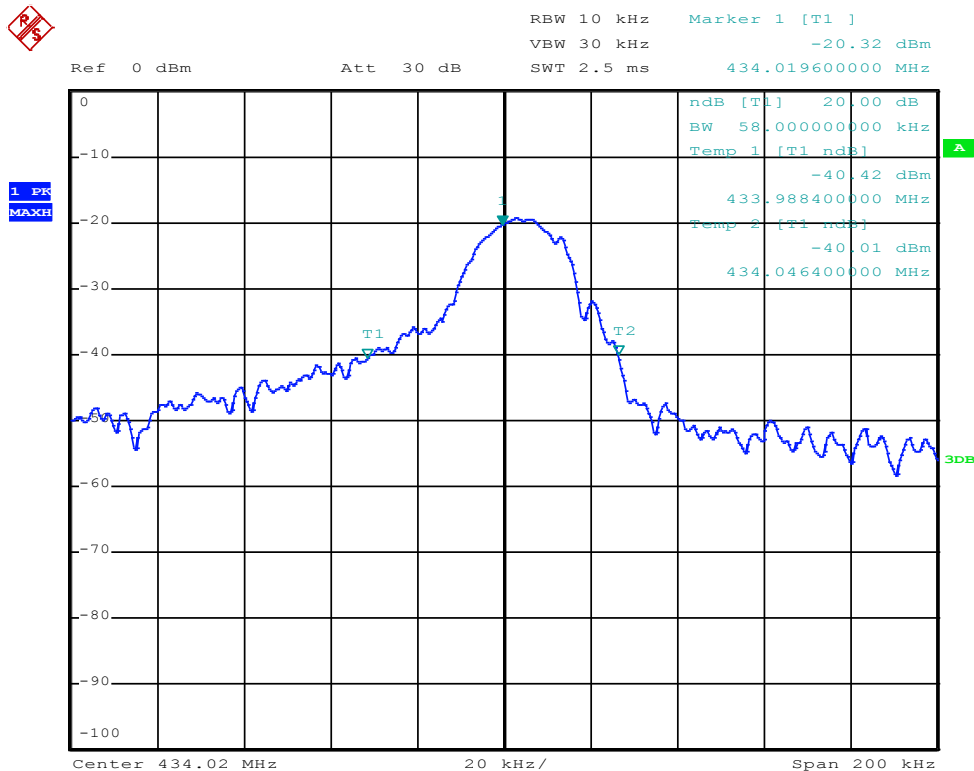



## 5.4. Duty cycle

### 5.4.1. Limit

No dedicated limit specified in the Rules.

### 5.4.2. Test Procedure

5.4.2.1. Place the EUT on the table and set it in transmitting mode.

5.4.2.2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.

5.4.2.3. Set centre frequency of spectrum analyzer=operating frequency.

5.4.2.4. Set the spectrum analyzer as RBW=100kHz, VBW=100KHz, Span=0Hz, Adjust Sweep time.

5.4.2.5. Repeat above procedures until all frequency measured was complete.

### 5.4.3. Test Data


$T_{on} = (0.36 * 14 + 0.94 * 11) \text{ms} = 15.38 \text{(ms)}$

$T_p = 37.60 \text{(ms)}$

$\text{Duty cycle} = T_{on} / T_p * 100\% = 15.38 / 37.60 * 100\% = 40.90\%$


$\text{DC Correction Factor} = 20 \log (T_{on} / T_p) = 20 \log (13.125 / 40.500) = -7.76 \text{dB}$

*Note: The signal bandwidth was measured and less than 100kHz RBW so PDCF factor is not required to correct the fundamental signal peak result.*

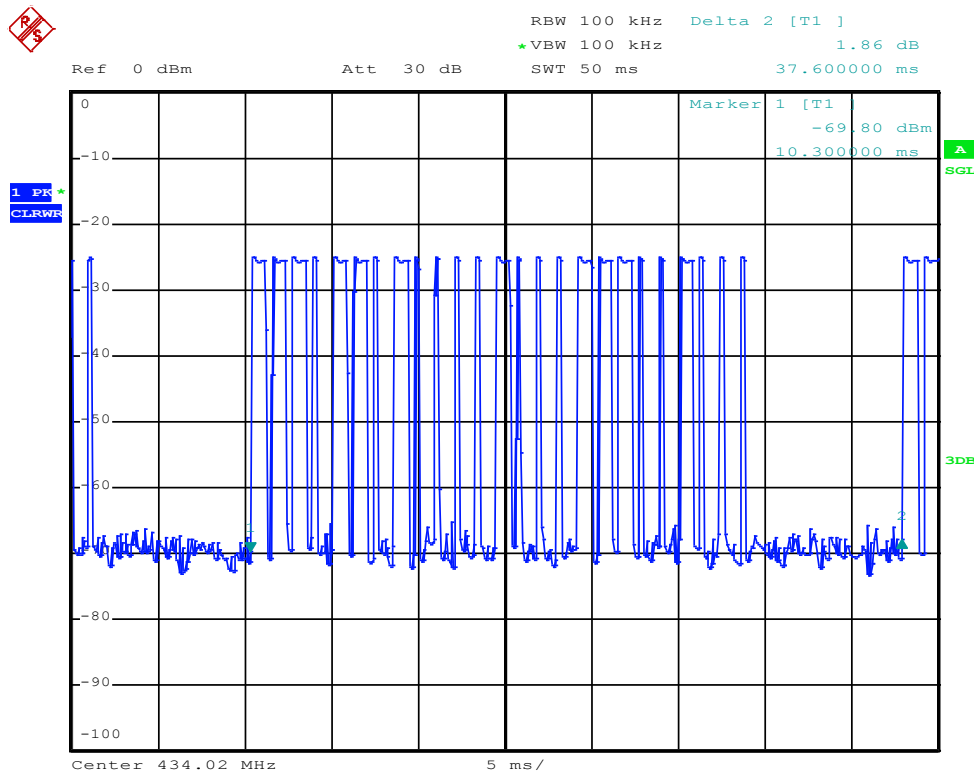




RBW 100 kHz  
\*VBW 100 kHz  
Ref 0 dBm Att 30 dB SWT 40 ms

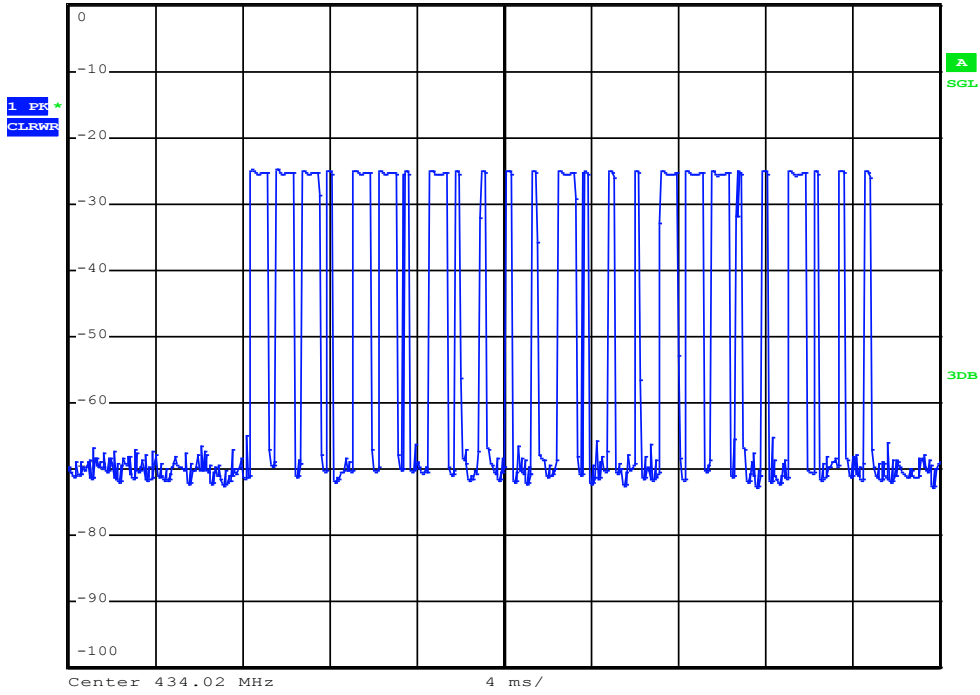


RBW 100 kHz Marker 1 [T1 ]  
\*VBW 100 kHz -71.09 dBm  
Ref 0 dBm Att 30 dB SWT 10 ms 3.580000 ms

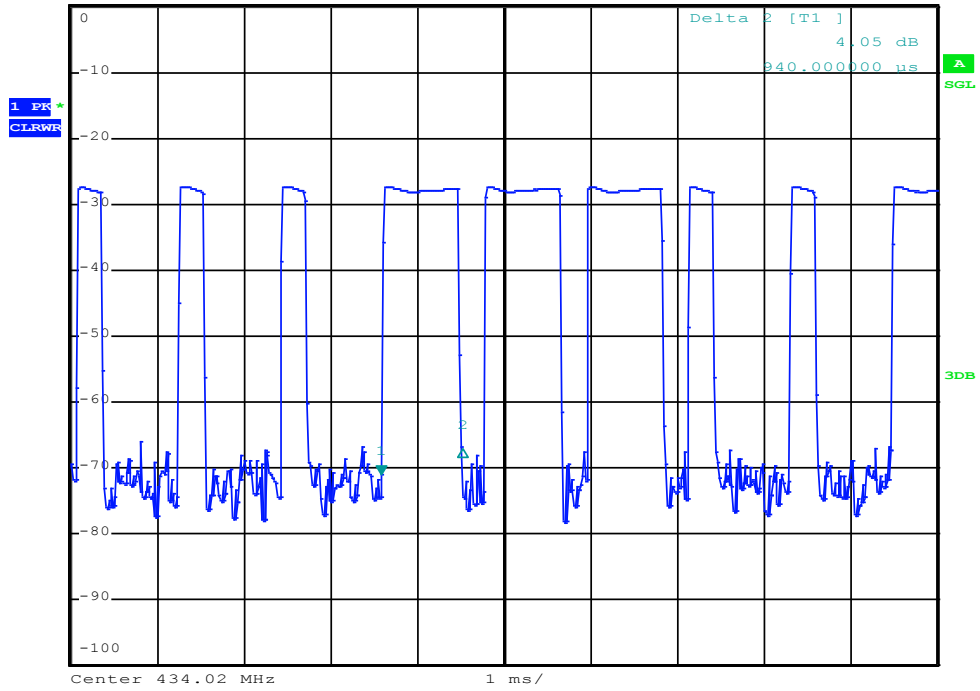



RBW 100 kHz Marker 1 [T1 ]  
\*VBW 100 kHz -70.69 dBm  
Ref 0 dBm Att 30 dB SWT 10 ms 6.200000 ms

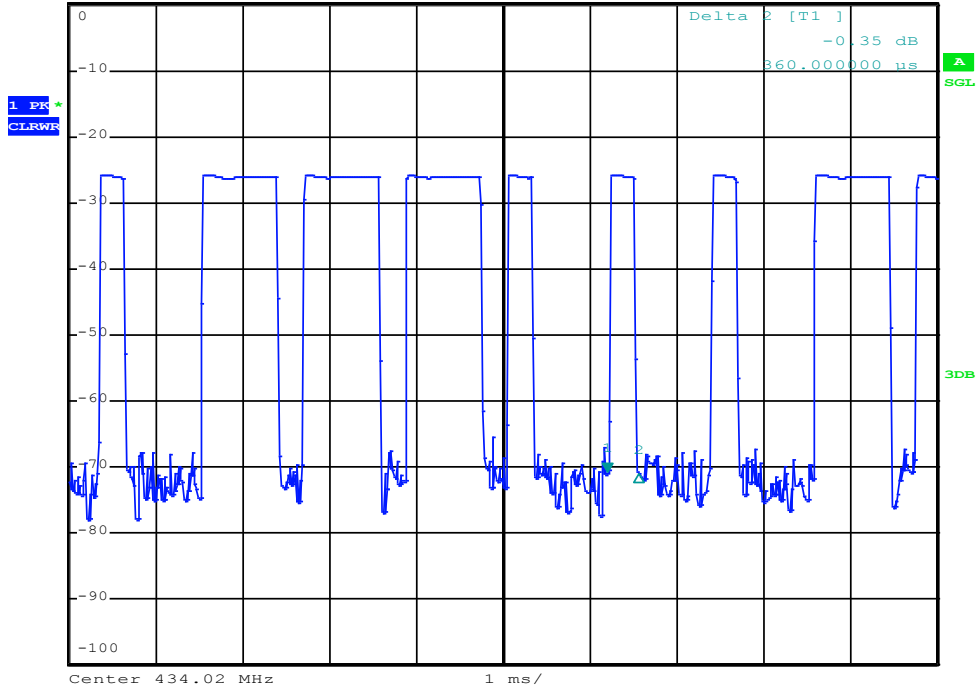


## 5.5. Power line conducted emissions

### 5.5.1 Standard Applicable

According to §15.207 (a): For an intentional radiator which is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed 250 microvolts (The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz). The limits at specific frequency range is listed as follows:

Frequency Range (MHz)	Limits (dBµV)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56	56 to 46
0.50 to 5	56	46
5 to 30	60	50

### 5.5.2 Block Diagram of Test Setup

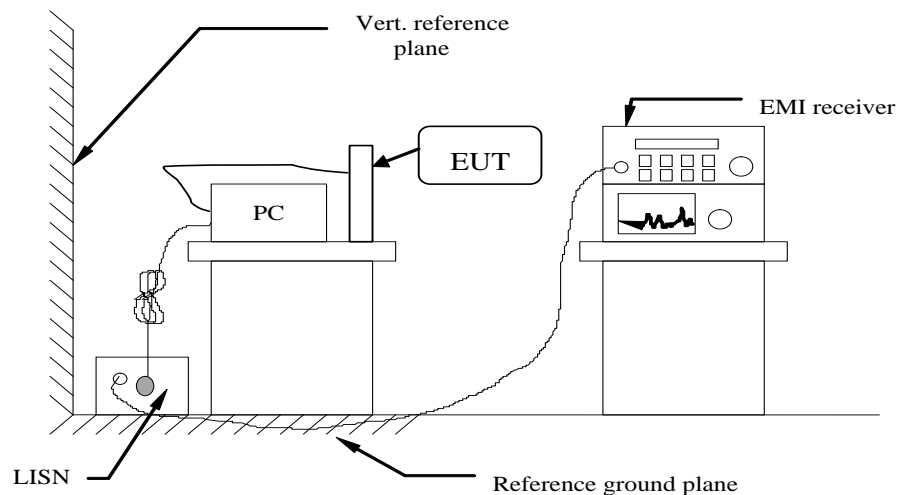


### 5.5.3 Test Results

PASS.

The test data please refer to following page.


Test plot for AC 120V

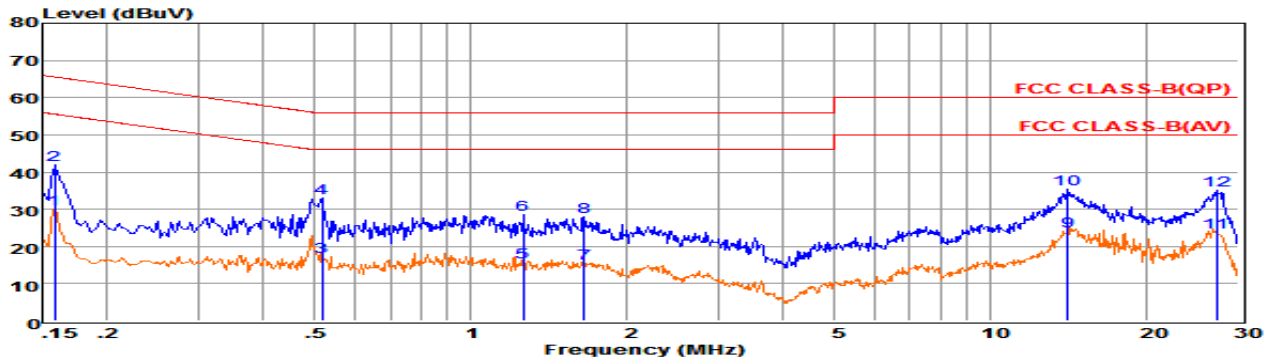

Env. Ins: 24\*/56%  
 Power Rating: AC 120V/60Hz  
 Pol: NEUTRAL

Freq	Reading	LisnFac	CabLos	Atten_Fac	Measured	Limit	Over	Remark
MHz	dBuV	dB	dB	dB	dBuV	dBuV	dB	
1 0.15816	10.25	9.68	0.02	10.00	29.95	55.56	-25.61	Average
2 0.15816	22.14	9.68	0.02	10.00	41.84	65.56	-23.72	QP
3 0.51824	-2.49	9.62	0.04	10.00	17.17	46.00	-28.83	Average
4 0.51824	13.28	9.62	0.04	10.00	32.94	56.00	-23.06	QP
5 1.26213	-3.85	9.63	0.05	10.00	15.83	46.00	-30.17	Average
6 1.26213	8.74	9.63	0.05	10.00	28.42	56.00	-27.58	QP
7 1.65370	-4.27	9.63	0.05	10.00	15.41	46.00	-30.59	Average
8 1.65370	8.27	9.63	0.05	10.00	27.95	56.00	-28.05	QP
914.06287	4.22	9.74	0.10	10.00	24.06	50.00	-25.94	Average
1014.06287	15.49	9.74	0.10	10.00	35.33	60.00	-24.67	QP
1127.27110	3.79	9.83	0.13	10.00	23.75	50.00	-26.25	Average
1227.27110	15.20	9.83	0.13	10.00	35.16	60.00	-24.84	QP

Remarks: 1. Measured = Reading + Lisn Factor +Cable Loss+Atten\_Fac.  
 2. The emission levels that are 20dB below the official limit are not reported.

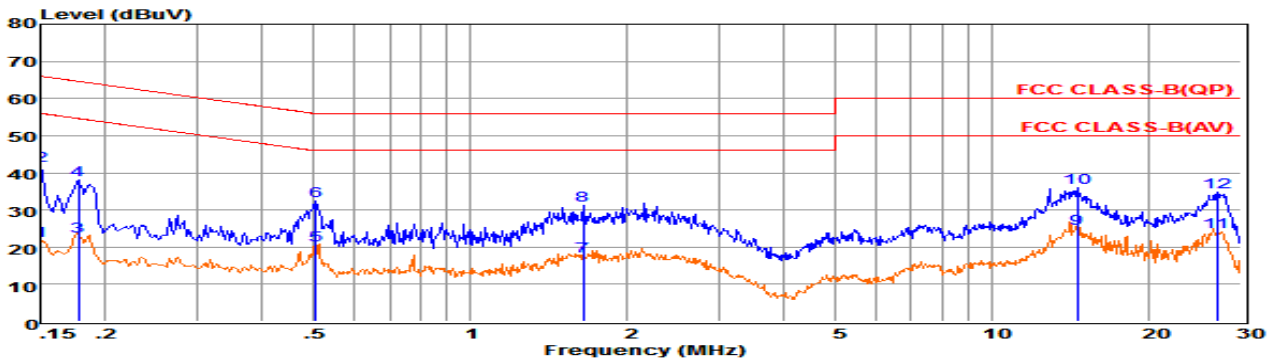


Env. Ins: 24\*/56%  
 Power Rating: AC 120V/60Hz  
 Pol: LINE

Freq	Reading	LisnFac	CabLos	Atten_Fac	Measured	Limit	Over	Remark
MHz	dBuV	dB	dB	dB	dBuV	dBuV	dB	
1 0.15000	2.23	9.57	0.02	10.00	21.82	56.00	-34.18	Average
2 0.15000	22.38	9.57	0.02	10.00	41.97	66.00	-24.03	QP
3 0.17772	3.27	9.61	0.02	10.00	22.90	54.59	-31.69	Average
4 0.17772	18.49	9.61	0.02	10.00	38.12	64.59	-26.47	QP
5 0.50469	0.82	9.62	0.04	10.00	20.48	46.00	-25.52	Average
6 0.50469	12.67	9.62	0.04	10.00	32.33	56.00	-23.67	QP
7 1.64497	-2.13	9.64	0.05	10.00	17.56	46.00	-28.44	Average
8 1.64497	11.48	9.64	0.05	10.00	31.17	56.00	-24.83	QP
914.59423	5.19	9.71	0.10	10.00	25.00	50.00	-25.00	Average
1014.59423	16.20	9.71	0.10	10.00	36.01	60.00	-23.99	QP
1126.98365	4.21	9.71	0.13	10.00	24.05	50.00	-25.95	Average
1226.98365	15.00	9.71	0.13	10.00	34.84	60.00	-25.16	QP

Remarks: 1. Measured = Reading + Lisn Factor +Cable Loss+Atten\_Fac.  
 2. The emission levels that are 20dB below the official limit are not reported.


Test plot for AC 230V

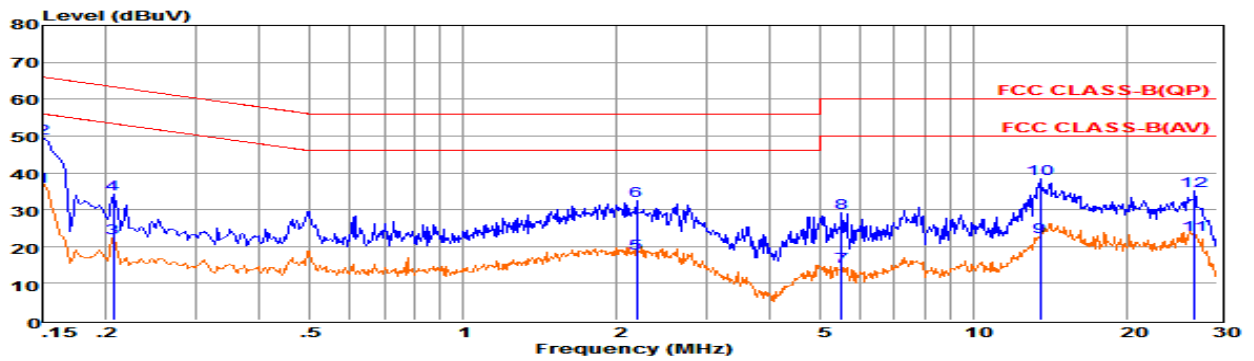

Env. Ins: 24\*/56%  
 Power Rating: AC 230V/50Hz  
 Pol: LINE

Freq	Reading	LisnFac	CabLos	Atten_Fac	Measured	Limit	Over	Remark
MHz	dBuV	dB	dB	dB	dBuV	dBuV	dB	
1 0.15000	16.65	9.57	0.02	10.00	36.24	56.00	-19.76	Average
2 0.15000	29.85	9.57	0.02	10.00	49.44	66.00	-16.56	QP
3 0.20614	2.68	9.63	0.03	10.00	22.34	53.36	-31.02	Average
4 0.20614	14.46	9.63	0.03	10.00	34.12	63.36	-29.24	QP
5 2.18984	-1.44	9.64	0.05	10.00	18.25	46.00	-27.75	Average
6 2.18984	12.71	9.64	0.05	10.00	32.40	56.00	-23.60	QP
7 5.50544	-5.24	9.66	0.06	10.00	14.48	50.00	-35.52	Average
8 5.50544	9.37	9.66	0.06	10.00	29.09	60.00	-30.91	QP
913.47925	2.89	9.71	0.10	10.00	22.70	50.00	-27.30	Average
1013.47925	18.53	9.71	0.10	10.00	38.34	60.00	-21.66	QP
1127.12700	3.46	9.71	0.13	10.00	23.30	50.00	-26.70	Average
1227.12700	15.39	9.71	0.13	10.00	35.23	60.00	-24.77	QP

Remarks: 1. Measured = Reading + Lisn Factor +Cable Loss+Atten\_Fac.  
 2. The emission levels that are 20dB below the official limit are not reported.

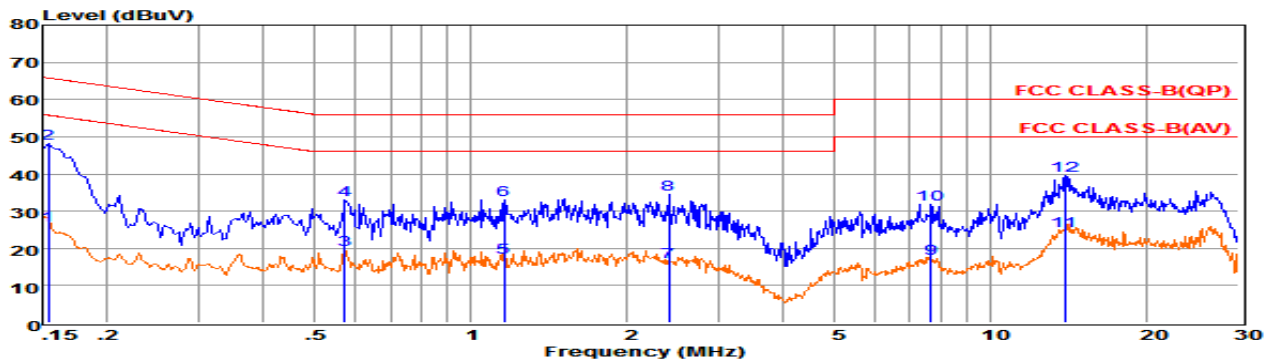

Env. Ins: 24\*/56%  
 Power Rating: AC 230V/50Hz  
 Pol: NEUTRAL

Freq	Reading	LisnFac	CabLos	Atten_Fac	Measured	Limit	Over	Remark
MHz	dBuV	dB	dB	dB	dBuV	dBuV	dB	
1 0.15403	6.51	9.69	0.02	10.00	26.22	55.78	-29.56	Average
2 0.15403	28.49	9.69	0.02	10.00	48.20	65.78	-17.58	QP
3 0.57313	-0.09	9.62	0.04	10.00	19.57	46.00	-26.43	Average
4 0.57313	13.40	9.62	0.04	10.00	33.06	56.00	-22.94	QP
5 1.15955	-2.05	9.63	0.05	10.00	17.63	46.00	-28.37	Average
6 1.15955	13.36	9.63	0.05	10.00	33.04	56.00	-22.96	QP
7 2.40897	-3.29	9.64	0.05	10.00	16.40	46.00	-29.60	Average
8 2.40897	14.69	9.64	0.05	10.00	34.38	56.00	-21.62	QP
9 7.68699	-2.63	9.70	0.07	10.00	17.14	50.00	-32.86	Average
10 7.68699	12.02	9.70	0.07	10.00	31.79	60.00	-28.21	QP
1113.91464	4.76	9.74	0.10	10.00	24.60	50.00	-25.40	Average
1213.91464	19.77	9.74	0.10	10.00	39.61	60.00	-20.39	QP

Remarks: 1. Measured = Reading + Lisn Factor +Cable Loss+Atten\_Fac.  
 2. The emission levels that are 20dB below the official limit are not reported.

## 5.6. Antenna Requirement

FCC 15.203

### 5.6.1. Standard Applicable

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

This EUT uses an integral antenna which is permanently attached.

### 5.6.2. Result

Compliant.

## 6. LIST OF MEASURING EQUIPMENTS

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Cal. Date	Due Date
3m Semi Anechoic Chamber	SIDT FRANKONIA	SAC-3M	03CH03-HY	30M-1GHz 3m	June 18, 2015	June 17, 2016
Amplifier	SCHAFFNER	COA9231A	18667	9kHz-2GHz	July 15, 2015	July 14, 2016
Amplifier	Agilent	8449B	3008A02120	1GHz-26.5GHz	July 15, 2015	July 14, 2016
Spectrum Analyzer	Agilent	E4407B	MY41440292	9k-26.5GHz	June 18, 2015	June 17, 2016
Loop Antenna	R&S	HFH2-Z2	860004/001	9k-30MHz	June 18, 2015	June 17, 2016
By-log Antenna	SCHAFFNER	CBL 6112D	22237	30MHz-1GHz	June 18, 2015	June 17, 2016
Horn Antenna	EMCO	3115	6741	1GHz-18GHz	June 18, 2015	June 17, 2016
RF Cable-R03m	Jye Bao	RG142	CB021	30MHz-1GHz	June 18, 2015	June 17, 2016
RF Cable-HIGH	SUHNER	SUCOFLEX 106	03CH03-HY	1GHz-40GHz	June 18, 2015	June 17, 2016
Spectrum Meter	R&S	FSP 30	100023	9kHz-30GHz	July 15, 2015	July 14, 2016
Power Sensor	R&S	NRV-Z32	10057	30MHz-6GHz	July 15, 2015	July 14, 2016
AC Power Source	HPC	HPA-500E	HPA-9100024	AC 0~300V	June 25, 2015	June 24, 2016
DC power Source	GW	GPC-6030D	C671845	DC 1V-60V	June 25, 2015	June 24, 2016
Temp. and Humidity Chamber	Giant Force	GTH-225-20-S	MAB0103-00	N/A	June 18, 2015	June 17, 2016
RF CABLE-1m	JYE Bao	RG142	CB034-1m	20MHz-7GHz	June 18, 2015	June 17, 2016
RF CABLE-2m	JYE Bao	RG142	CB)35-2m	20MHz-1GHz	June 18, 2015	June 17, 2016
Vector signal Generator	R&S	SMU200A	102098	100kHz~6GHz	June 18, 2015	June 17, 2016
Spectrum Analyzer	Agilent	N9020A	MY50510140	9KHz-26.5GHz	October 28, 2015	October 27, 2016

-----THE END OF REPORT-----