

# FCC REPORT


**Applicant:** Autel Robotics Co., Ltd.

**Address of Applicant:** 9th Floor, Bldg. B1,Zhiyuan,1001 Xueyuan Rd., Xili, Nanshan, Shenzhen 518055, China

**Equipment Under Test (EUT)**

Product Name: DragonFish Ground Control Station

Model No.: DFRC-2

Trade mark: 

**FCC ID:** 2AGNTDFRC2TBA

**Applicable standards:** FCC CFR Title 47 Part 15 Subpart C Section 15.247

**Date of sample receipt:** 24 Sep., 2021

**Date of Test:** 24 Sep., to 20 Oct., 2021

**Date of report issued:** 20 Oct., 2021

**Test Result:** PASS\*

\* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:



Bruce Zhang  
Laboratory Manager

This report details the results of the testing carried out on one sample. The results contained in this test report do not relate to other samples of the same product and does not permit the use of the JYT product certification mark. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report.

This report may only be reproduced and distributed in full. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards.

This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

## 2 Version

Version No.	Date	Description
00	20 Oct., 2021	Original

Tested by:

Mike.ou  
Test Engineer

Date:

20 Oct., 2021

Reviewed by:

Winner Zhang  
Project Engineer

Date:

20 Oct., 2021

### 3 Contents

	Page
<b>1 COVER PAGE.....</b>	<b>1</b>
<b>2 VERSION .....</b>	<b>2</b>
<b>3 CONTENTS .....</b>	<b>3</b>
<b>4 TEST SUMMARY.....</b>	<b>4</b>
<b>5 GENERAL INFORMATION.....</b>	<b>5</b>
5.1 CLIENT INFORMATION.....	5
5.2 GENERAL DESCRIPTION OF E.U.T.....	5
5.3 TEST ENVIRONMENT AND MODE .....	7
5.4 DESCRIPTION OF SUPPORT UNITS.....	7
5.5 MEASUREMENT UNCERTAINTY.....	7
5.6 LABORATORY FACILITY.....	7
5.7 LABORATORY LOCATION .....	7
5.8 TEST INSTRUMENTS LIST.....	8
<b>6 TEST RESULTS AND MEASUREMENT DATA .....</b>	<b>9</b>
6.1 ANTENNA REQUIREMENT .....	9
6.2 CONDUCTED EMISSION .....	10
6.3 CONDUCTED OUTPUT POWER .....	15
6.4 OCCUPY BANDWIDTH .....	16
6.5 POWER SPECTRAL DENSITY .....	17
6.6 BAND EDGE .....	18
6.6.1 Conducted Emission Method.....	18
6.6.2 Radiated Emission Method.....	19
6.7 SPURIOUS EMISSION.....	68
6.7.1 Conducted Emission Method.....	68
6.7.2 Radiated Emission Method.....	69
<b>7 TEST SETUP PHOTO .....</b>	<b>77</b>
<b>8 EUT CONSTRUCTIONAL DETAILS .....</b>	<b>78</b>

## 4 Test Summary

Test Items	Section in CFR 47	Test Data	Result
Antenna requirement	15.203 & 15.247 (b)	See Section 6.1	Pass
AC Power Line Conducted Emission	15.207	See Section 6.2	Pass
Duty Cycle	ANSI C63.10-2013	Appendix A – 900MHz Appendix B – 2.4GHz	Pass
Conducted Peak Output Power	15.247 (b)(3)	Appendix A – 900MHz Appendix B – 2.4GHz	Pass
6dB Emission Bandwidth 99% Occupied Bandwidth	15.247 (a)(2)	Appendix A – 900MHz Appendix B – 2.4GHz	Pass
Power Spectral Density	15.247 (e)	Appendix A – 900MHz Appendix B – 2.4GHz	Pass
Conducted Band Edge	15.247 (d)	Appendix A – 900MHz Appendix B – 2.4GHz	Pass
Radiated Band Edge		See Section 6.6.2	Pass
Conducted Spurious Emission	15.205 & 15.209	Appendix A – 900MHz Appendix B – 2.4GHz	Pass
Radiated Spurious Emission		See Section 6.7.2	Pass
<p><b>Remark:</b></p> <ol style="list-style-type: none"> <li>1. Pass: The EUT complies with the essential requirements in the standard.</li> <li>2. The cable insertion loss used by “RF Output Power” and other conduction measurement items is 0.5dB (provided by the customer).</li> </ol>			
<b>Test Method:</b>	ANSI C63.10-2013 KDB 558074 D01 15.247 Meas Guidance v05r02		

## 5 General Information

### 5.1 Client Information

Applicant:	Autel Robotics Co., Ltd.
Address:	9th Floor, Bldg. B1, Zhiyuan,1001 Xueyuan Rd., Xili, Nanshan, Shenzhen 518055, China
Manufacturer/ Factory:	Autel Robotics Co., Ltd.
Address:	9th Floor, Bldg. B1, Zhiyuan,1001 Xueyuan Rd., Xili, Nanshan, Shenzhen 518055, China

### 5.2 General Description of E.U.T.

Product Name:	DragonFish Ground Control Station
Model No.:	DFRC-2
Operation Frequency:	904.0MHz~926.0MHz, 2403.5MHz~2475.5MHz
Channel numbers:	904.0MHz~926.0MHz: 23 for 1.4MHz Bandwidth 13 for 10 MHz Bandwidth 3 for 20 MHz Bandwidth  2403.5MHz~2475.5MHz: 71 for 1.4MHz Bandwidth 65 for 10 MHz Bandwidth 51 for 20 MHz Bandwidth
Channel separation:	1MHz
Modulation technology:	QPSK and 16QAM
Bandwidth:	1.4MHz, 10MHz, 20MHz
ANT TXRX Type:	MISO Mode(ANT 6 support TXRX, ANT5 only RX)
Antenna Type:	External Antenna
Antenna gain:	Chip 3: 906.0MHz~924.0MHz : 2.9dBi(declare by Applicant) Chip 3: 2403.5MHz~2475.5MHz: 1.8dBi(declare by Applicant)
Power supply:	Rechargeable Li-ion Battery DC11.4V-8.2Ah
AC adapter:	Adapter 1: Model: ADS-110DL-19-1 190090G Input: AC100-240V, 50/60Hz, 1.5A Output: DC 19.0V, 4.74A Adapter 2: Model: DF_CHARGER Input: AC100-240V, 50/60Hz, 4.0A Output: DC 26.4V, 7A
Test Sample Condition:	The test samples were provided in good working order with no visible defects.

**900MHz:**

Operation Frequency each of channel for 1.4MHz Bandwidth					
Channel	Frequency	Channel	Frequency	Channel	Frequency
1	904MHz	....	....	....	....
2	905MHz	11	915MHz	22	925MHz
3	906MHz	....	....	23	926MHz

Note:  
1. Channel 1, 15 & 19 selected as Lowest, Middle and Highest channel.

Operation Frequency each of channel for 10MHz Bandwidth					
Channel	Frequency	Channel	Frequency	Channel	Frequency
1	909MHz	....	....	....	....
2	910MHz	7	915MHz	12	920MHz
3	911MHz	....	....	13	921MHz

Note:  
1. Channel 1, 7 & 13 selected as Lowest, Middle and Highest channel.

Operation Frequency each of channel for 20MHz Bandwidth					
Channel	Frequency	Channel	Frequency	Channel	Frequency
1	914	2	915	3	916

Note:  
1. Channel 1, 2 & 3 selected as Lowest, Middle and Highest channel.

**2.4GHz:**

Operation Frequency each of channel for 1.4MHz Bandwidth							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2403.5MHz	4	2406.5MHz	....	....	73	2475.5MHz
2	2404.5MHz	5	2407.5MHz	35	2439.5MHz		
3	2405.5MHz	6	2408.5MHz	....	....		

Note:  
1. Channel 1, 35 & 73 selected as Lowest, Middle and Highest channel.

Operation Frequency each of channel for 10MHz Bandwidth							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2407.5MHz	4	2410.5MHz	....	....	64	2470.5MHz
2	2408.5MHz	5	2411.5MHz	33	2439.5MHz	65	2471.5MHz
3	2409.5MHz	6	2412.5MHz	....	....		

Note:  
1. Channel 1, 33 & 65 selected as Lowest, Middle and Highest channel.

Operation Frequency each of channel for 20MHz Bandwidth							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2412.5MHz	4	2415.5MHz	....	....	50	2461.5MHz
2	2413.5MHz	5	2416.5MHz	26	2437.5MHz	51	2462.5MHz
3	2414.5MHz	6	2417.5MHz	....	....		

Note:  
1. Channel 1, 26 & 65 selected as Lowest, Middle and Highest channel.

### 5.3 Test environment and mode

Operating Environment:	
Temperature:	24.0 °C
Humidity:	54 % RH
Atmospheric Pressure:	1010 mbar
Test mode:	
Transmitting mode	Keep the EUT in continuous transmitting with modulation
<p>Radiated Emission: The sample was placed 0.8m (below 1GHz)/1.5m (above 1GHz) above the ground plane of 3m chamber. Measurements in both Vertical and Horizontal polarities were performed. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y &amp; Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, rotating the turntable, varying antenna height from 1m to 4m in both Vertical and Horizontal polarizations. The emissions worst-case are shown in Test Results of the following pages. We have verified the construction and function in typical operation. All the test modes were carried out with the EUT in transmitting operation, which was shown in this test report and defined as follows:</p>	

### 5.4 Description of Support Units

The EUT has been tested as an independent unit.

### 5.5 Measurement Uncertainty

Parameter	Expanded Uncertainty (Confidence of 95%)
Conducted Emission (150kHz ~ 30MHz) for V-AMN	2.62 dB
Conducted Emission (150kHz ~ 30MHz) for AAN	3.54 dB
Radiated Emission (9kHz ~ 30MHz electric field) for 3m SAC	3.13 dB
Radiated Emission (30MHz ~ 1GHz) for 3m SAC	4.45 dB
Radiated Emission (1GHz ~ 18GHz) for 3m SAC	5.34 dB
Radiated Emission (18GHz ~ 40GHz) for 3m SAC	5.34 dB
Radiated Emission (30MHz ~ 1GHz) for 10m SAC	4.32 dB

### 5.6 Laboratory Facility

The test facility is recognized, certified, or accredited by the following organizations:

- FCC - Designation No.: CN1211**  
 JianYan Testing Group Shenzhen Co., Ltd. has been accredited as a testing laboratory by FCC(Federal Communications Commission). The test firm Registration No. is 727551.
- ISED – CAB identifier.: CN0021**  
 The 3m Semi-anechoic chamber and 10m Semi-anechoic chamber of JianYan Testing Group Shenzhen Co., Ltd. has been Registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 10106A-1.
- A2LA - Registration No.: 4346.01**  
 This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2017 General requirements for the competence of testing and calibration laboratories. The test scope can be found as below link: <https://portal.a2la.org/scopepdf/4346-01.pdf>

### 5.7 Laboratory Location

JianYan Testing Group Shenzhen Co., Ltd.  
 Address: No.101, Building 8, Innovation Wisdom Port, No.155 Hongtian Road, Huangpu Community, Xinqiao Street, Bao'an District, Shenzhen, Guangdong, People's Republic of China.  
 Tel: +86-755-23118282, Fax: +86-755-23116366  
 Email: info-JYTee@lets.com, Website: <http://www.ccis-cb.com>

## 5.8 Test Instruments list

<b>Radiated Emission:</b>					
<b>Test Equipment</b>	<b>Manufacturer</b>	<b>Model No.</b>	<b>Serial No.</b>	<b>Cal.Date (mm-dd-yy)</b>	<b>Cal.Due date (mm-dd-yy)</b>
3m SAC	ETS	RFD-100	Q1984	04-14-2021	04-13-2024
BiConiLog Antenna	SCHWARZBECK	VULB9163	9163-1246	03-07-2021	03-06-2022
Biconical Antenna	SCHWARZBECK	VUBA 9117	9117#359	06-17-2021	06-17-2022
Horn Antenna	SCHWARZBECK	BBHA9120D	912D-916	03-07-2021	03-06-2022
Broad-Band Horn Antenna	SCHWARZBECK	BBHA9170	1067	04-02-2021	04-01-2022
Broad-Band Horn Antenna	SCHWARZBECK	BBHA9170	1068	04-02-2021	04-01-2022
EMI Test Receiver	Rohde & Schwarz	ESRP7	101070	03-03-2021	03-02-2022
Spectrum analyzer	Rohde & Schwarz	FSP30	101454	03-03-2021	03-02-2022
Spectrum analyzer	Keysight	N9010B	MY60240202	11-27-2020	11-26-2021
Low Pre-amplifier	SCHWARZBECK	BBV9743B	00305	03-07-2021	03-06-2022
High Pre-amplifier	SKET	LNPA_0118G-50	MF280208233	03-07-2021	03-06-2022
Cable	Qualwave	JYT3M-1G-NN-8M	JYT3M-1	03-07-2021	03-06-2022
Cable	Qualwave	JYT3M-18G-NN-8M	JYT3M-2	03-07-2021	03-06-2022
Cable	Qualwave	JYT3M-1G-BB-5M	JYT3M-3	03-07-2021	03-06-2022
Cable	Bost	JYT3M-40G-SS-8M	JYT3M-4	04-02-2021	04-01-2022
EMI Test Software	Tonscend	TS+	Version:3.0.0.1		
EMI Test Software	AUDIX	E3	Version: 6.110919b		

<b>Conducted Emission:</b>					
<b>Test Equipment</b>	<b>Manufacturer</b>	<b>Model No.</b>	<b>Serial No.</b>	<b>Cal. Date (mm-dd-yy)</b>	<b>Cal. Due date (mm-dd-yy)</b>
EMI Test Receiver	Rohde & Schwarz	ESCI 3	101189	03-03-2021	03-02-2022
LISN	Rohde & Schwarz	ENV432	101602	04-06-2021	04-05-2022
LISN	Rohde & Schwarz	ESH3-Z5	843862/010	06-18-2020	06-17-2022
RF Switch	TOP PRECISION	RSU0301	N/A	03-03-2021	03-02-2022
Cable	Bost	JYTCE-1G-NN-2M	JYTCE-1	03-03-2021	03-02-2022
Cable	Bost	JYTCE-1G-BN-3M	JYTCE-2	03-03-2021	03-02-2022
EMI Test Software	AUDIX	E3	Version: 6.110919b		

<b>Conducted method:</b>					
<b>Test Equipment</b>	<b>Manufacturer</b>	<b>Model No.</b>	<b>Serial No.</b>	<b>Cal. Date (mm-dd-yy)</b>	<b>Cal. Due date (mm-dd-yy)</b>
Spectrum Analyzer	Keysight	N9010B	MY60240202	11-27-2020	11-26-2021
Vector Signal Generator	Keysight	N5182B	MY59101009	11-27-2020	11-26-2021
Analog Signal Generator	Keysight	N5173B	MY59100765	11-27-2020	11-26-2021
Power Detector Box	MWRF-test	MW100-PSB	MW201020JYT	11-27-2020	11-26-2021
Simulated Station	Rohde & Schwarz	CMW270	102335	11-27-2020	11-26-2021
RF Control Box	MWRF-test	MW100-RFCB	MW200927JYT	N/A	N/A
PDU	MWRF-test	XY-G10	N/A	N/A	N/A
DC Power Supply	Keysight	E3642A	MY60296194	11-27-2020	11-26-2021
Temperature Humidity Chamber	ZhongZhi	CZ-C-150D	ZH16491	11-01-2020	10-31-2021
Test Software	MWRF-tes	MTS 8310	Version: 2.0.0.0		




## 6 Test results and Measurement Data

### 6.1 Antenna requirement


<b>Standard requirement:</b>	FCC Part 15 C Section 15.203 /247(b)						
<p>15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.</p> <p>15.247(b) (4) requirement: (4) The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.</p>							
<b>E.U.T Antenna:</b>							
<p>The antenna is an External antenna which cannot replace by end-user, the best case gain of the antenna as bellow:</p> <table border="1" style="margin-left: auto; margin-right: auto;"> <thead> <tr> <th>ANT Band</th> <th>ANT Gain</th> </tr> </thead> <tbody> <tr> <td>900MHz</td> <td>2.9dBi</td> </tr> <tr> <td>2.4GHz</td> <td>1.8dBi</td> </tr> </tbody> </table>		ANT Band	ANT Gain	900MHz	2.9dBi	2.4GHz	1.8dBi
ANT Band	ANT Gain						
900MHz	2.9dBi						
2.4GHz	1.8dBi						

## 6.2 Conducted Emission

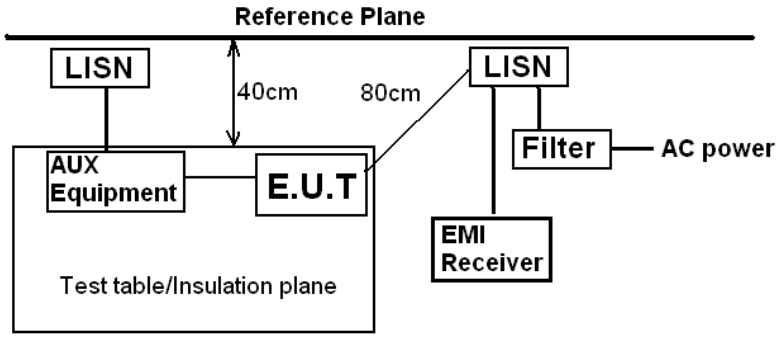Test Requirement:	FCC Part 15 C Section 15.207		
Test Frequency Range:	150 kHz to 30 MHz		
Class / Severity:	Class B		
Receiver setup:	RBW=9 kHz, VBW=30 kHz		
Limit:	Frequency range (MHz)	Limit (dBuV)	
		Quasi-peak	Average
	0.15-0.5	66 to 56*	56 to 46*
	0.5-5	56	46
	5-30	60	50
* Decreases with the logarithm of the frequency.			
Test procedure	<ol style="list-style-type: none"> <li>1. The E.U.T and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.), which provides a 50ohm/50uH coupling impedance for the measuring equipment.</li> <li>2. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs).</li> <li>3. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10(latest version) on conducted measurement.</li> </ol>		
Test setup:	 <p><i>Remark:</i>  E.U.T: Equipment Under Test  LISN: Line Impedance Stabilization Network  Test table height=0.8m</p>		
Test Instruments:	Refer to section 5.8 for details		
Test mode:	Refer to section 5.3 for details		
Test results:	Passed		

Measurement Data:

Product name:	DragonFish Ground Control Station	Product model:	DFRC-2
Test by:	Mike	Test mode:	900MHz Tx mode
Test frequency:	150 kHz ~ 30 MHz	Phase:	Line
Test voltage:	AC 120 V/60 Hz	Environment:	Temp: 22.5°C Huni: 55%

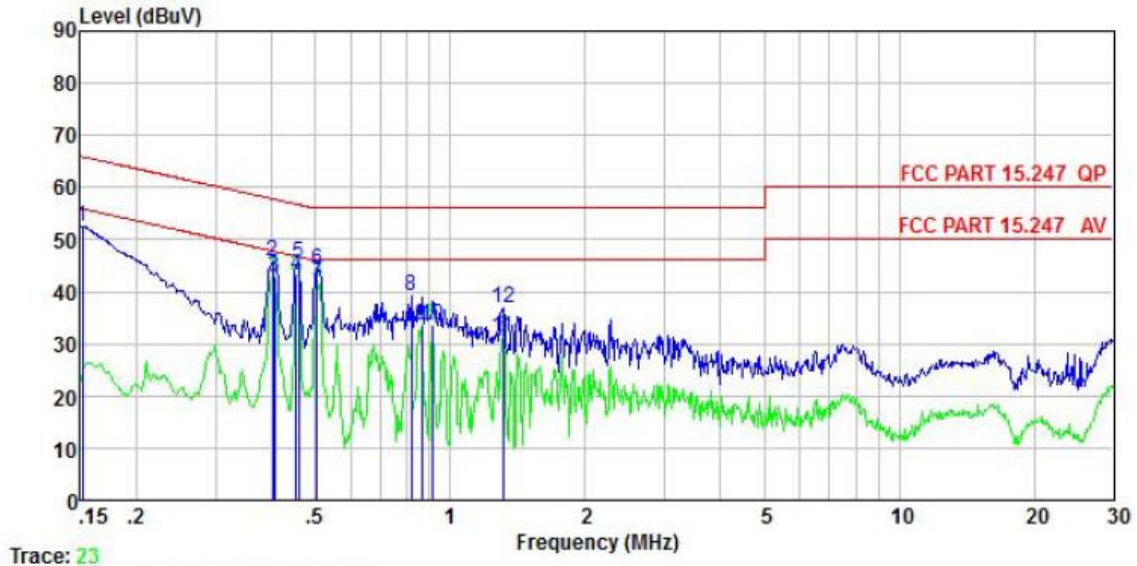


Trace: 23

	Freq	Read Level	LISN Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dB	dB	dBuV	dBuV	dB	
1	0.152	42.26	10.22	0.00	0.01	52.49	65.91	-13.42	QP
2	0.402	35.36	10.28	0.00	0.04	45.68	57.81	-12.13	QP
3	0.406	32.60	10.28	0.00	0.04	42.92	47.73	-4.81	Average
4	0.454	33.01	10.28	0.00	0.03	43.32	46.80	-3.48	Average
5	0.459	35.11	10.29	0.00	0.03	45.43	56.71	-11.28	QP
6	0.505	33.96	10.29	0.00	0.03	44.28	56.00	-11.72	QP
7	0.505	31.49	10.29	0.00	0.03	41.81	46.00	-4.19	Average
8	0.817	28.87	10.31	0.00	0.03	39.21	56.00	-16.79	QP
9	0.862	23.28	10.31	0.00	0.04	33.63	46.00	-12.37	Average
10	0.914	23.24	10.31	0.00	0.04	33.59	46.00	-12.41	Average
11	1.310	20.80	10.32	0.00	0.11	31.23	46.00	-14.77	Average
12	1.317	26.28	10.32	0.00	0.11	36.71	56.00	-19.29	QP

Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Final Level = Receiver Read level + LISN Factor + Aux Factor + Cable Loss.

<b>Product name:</b>	DragonFish Ground Control Station	<b>Product model:</b>	DFRC-2
<b>Test by:</b>	Mike	<b>Test mode:</b>	900MHz Tx mode
<b>Test frequency:</b>	150 kHz ~ 30 MHz	<b>Phase:</b>	Neutral
<b>Test voltage:</b>	AC 120 V/60 Hz	<b>Environment:</b>	Temp: 22.5°C Humi: 55%

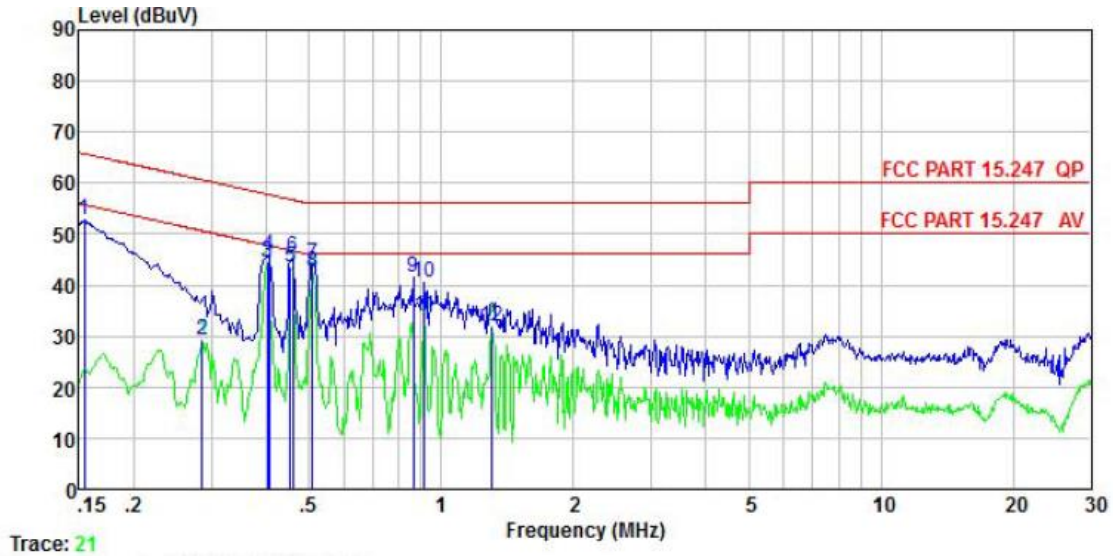


Trace: 21

	Freq	Read Level	LISN Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dB	dB	dBuV	dBuV	dB	
1	0.154	42.45	10.19	0.00	0.01	52.65	65.78	-13.13	QP
2	0.286	19.03	10.25	0.00	0.03	29.31	50.63	-21.32	Average
3	0.402	34.20	10.27	0.00	0.04	44.51	47.81	-3.30	Average
4	0.406	35.46	10.27	0.00	0.04	45.77	57.73	-11.96	QP
5	0.454	33.12	10.27	0.00	0.03	43.42	46.80	-3.38	Average
6	0.459	35.33	10.28	0.00	0.03	45.64	56.71	-11.07	QP
7	0.510	34.00	10.28	0.00	0.03	44.31	56.00	-11.69	QP
8	0.510	32.06	10.28	0.00	0.03	42.37	46.00	-3.63	Average
9	0.862	31.13	10.31	0.00	0.04	41.48	56.00	-14.52	QP
10	0.914	30.23	10.31	0.00	0.04	40.58	56.00	-15.42	QP
11	0.914	23.39	10.31	0.00	0.04	33.74	46.00	-12.26	Average
12	1.303	21.41	10.31	0.00	0.11	31.83	46.00	-14.17	Average

Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Final Level = Receiver Read level + LISN Factor + Aux Factor + Cable Loss.

<b>Product name:</b>	DragonFish Ground Control Station	<b>Product model:</b>	DFRC-2
<b>Test by:</b>	Mike	<b>Test mode:</b>	2.4GHz Tx mode
<b>Test frequency:</b>	150 kHz ~ 30 MHz	<b>Phase:</b>	Line
<b>Test voltage:</b>	AC 120 V/60 Hz	<b>Environment:</b>	Temp: 22.5°C Huni: 55%

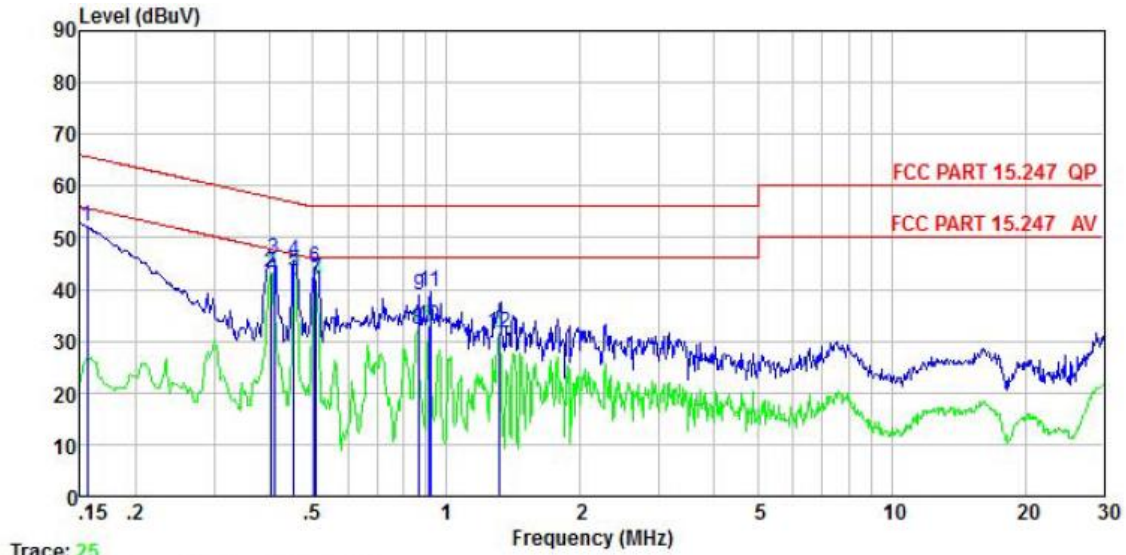

Trace: 25


	Freq	Read Level	LISN Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dB	dB	dBuV	dBuV	dB	
1	0.156	41.86	10.22	0.00	0.01	52.09	65.69	-13.60	QP
2	0.402	32.93	10.28	0.00	0.04	43.25	47.81	-4.56	Average
3	0.410	35.48	10.28	0.00	0.04	45.80	57.64	-11.84	QP
4	0.454	35.10	10.28	0.00	0.03	45.41	56.80	-11.39	QP
5	0.454	33.15	10.28	0.00	0.03	43.46	46.80	-3.34	Average
6	0.505	33.78	10.29	0.00	0.03	44.10	56.00	-11.90	QP
7	0.510	31.63	10.29	0.00	0.03	41.95	46.00	-4.05	Average
8	0.862	22.00	10.31	0.00	0.04	32.35	46.00	-13.65	Average
9	0.866	28.64	10.31	0.00	0.04	38.99	56.00	-17.01	QP
10	0.914	22.64	10.31	0.00	0.04	32.99	46.00	-13.01	Average
11	0.918	29.25	10.31	0.00	0.04	39.60	56.00	-16.40	QP
12	1.310	21.20	10.32	0.00	0.11	31.63	46.00	-14.37	Average

Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Final Level = Receiver Read level + LISN Factor + Aux Factor + Cable Loss.



<b>Product name:</b>	DragonFish Ground Control Station	<b>Product model:</b>	DFRC-2
<b>Test by:</b>	Mike	<b>Test mode:</b>	2.4GHz Tx mode
<b>Test frequency:</b>	150 kHz ~ 30 MHz	<b>Phase:</b>	Neutral
<b>Test voltage:</b>	AC 120 V/60 Hz	<b>Environment:</b>	Temp: 22.5°C Humi: 55%

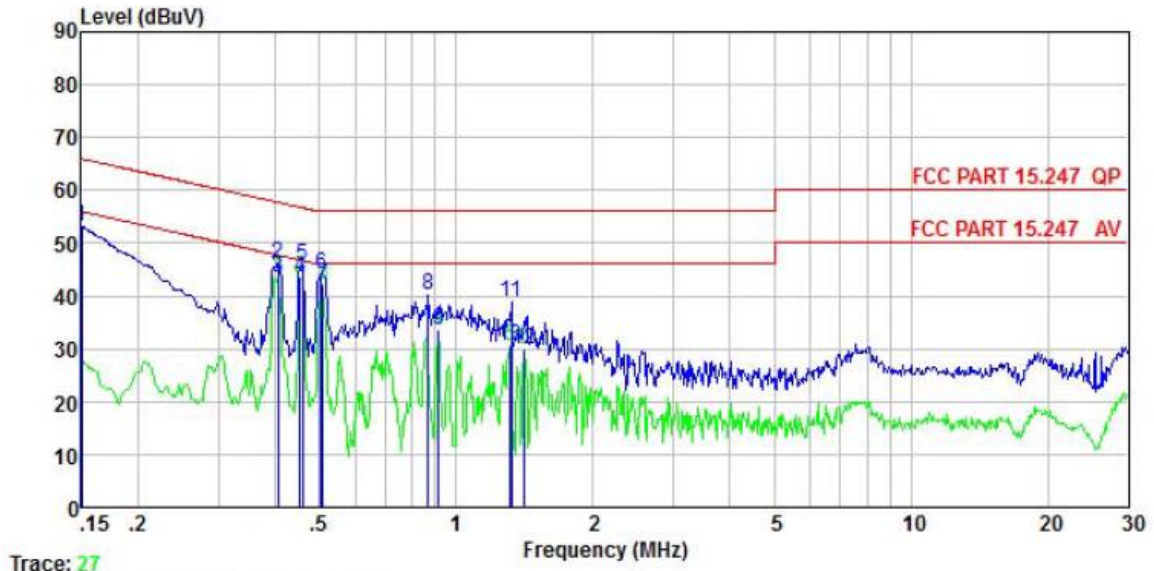


Trace: 27

	Freq	Read Level	LISN Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dB	dB	dBuV	dBuV	dB	
1	0.150	43.08	10.19	0.00	0.01	53.28	66.00	-12.72	QP
2	0.406	35.85	10.27	0.00	0.04	46.16	57.73	-11.57	QP
3	0.406	33.21	10.27	0.00	0.04	43.52	47.73	-4.21	Average
4	0.454	33.07	10.27	0.00	0.03	43.37	46.80	-3.43	Average
5	0.459	35.39	10.28	0.00	0.03	45.70	56.71	-11.01	QP
6	0.505	33.88	10.28	0.00	0.03	44.19	56.00	-11.81	QP
7	0.510	31.96	10.28	0.00	0.03	42.27	46.00	-3.73	Average
8	0.866	29.84	10.31	0.00	0.04	40.19	56.00	-15.81	QP
9	0.914	23.03	10.31	0.00	0.04	33.38	46.00	-12.62	Average
10	1.317	20.28	10.31	0.00	0.11	30.70	46.00	-15.30	Average
11	1.324	28.35	10.31	0.00	0.11	38.77	56.00	-17.23	QP
12	1.411	19.56	10.31	0.00	0.13	30.00	46.00	-16.00	Average


Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Final Level = Receiver Read level + LISN Factor + Aux Factor + Cable Loss.

### 6.3 Conducted Output Power

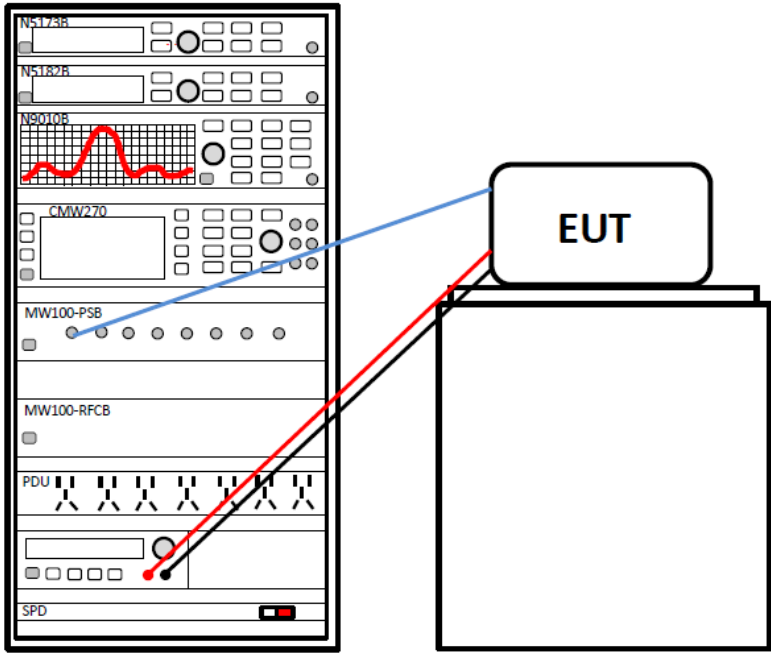
Test Requirement:	FCC Part 15 C Section 15.247 (b)(3)
Limit:	30dBm
Test setup:	
Test Instruments:	Refer to section 5.8 for details
Test mode:	Refer to section 5.3 for details
Test results:	Passed
Measurement Data:	Refer to Appendix A – 900MHz, Appendix B – 2.4GHz,

### 6.4 Occupy Bandwidth

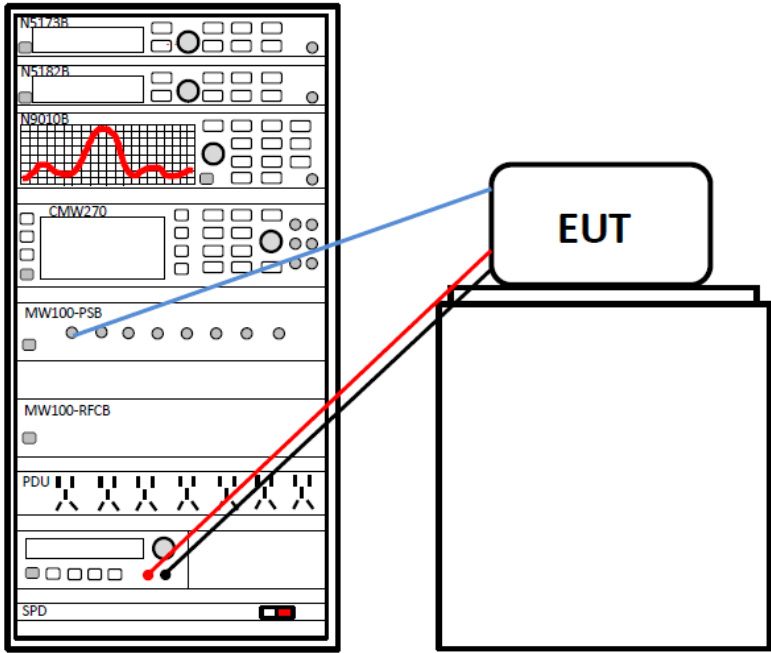Test Requirement:	FCC Part 15 C Section 15.247 (a)(2)
Limit:	6dB EBW >500kHz
Test setup:	
Test Instruments:	Refer to section 5.8 for details
Test mode:	Refer to section 5.3 for details
Test results:	Passed
Measurement Data:	Refer to Appendix A – 900MHz, Appendix B – 2.4GHz,




### 6.5 Power Spectral Density

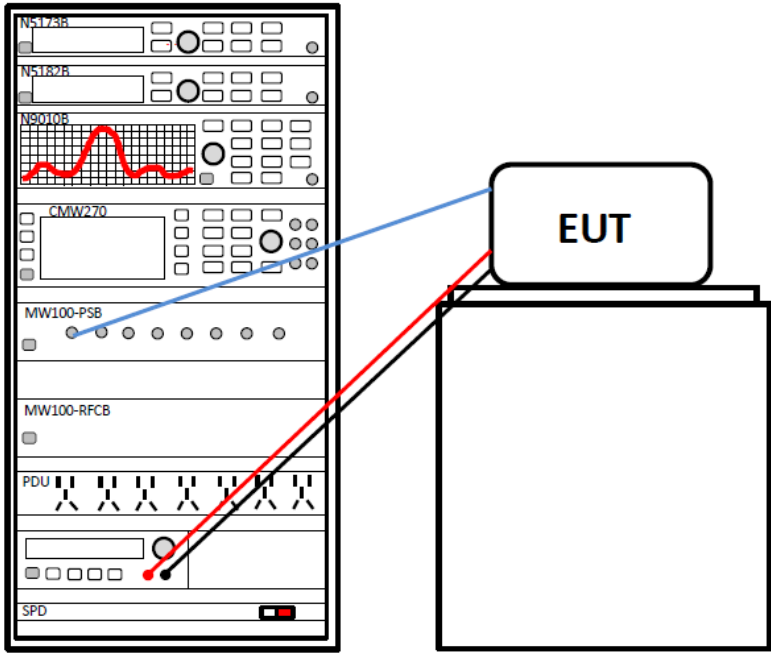Test Requirement:	FCC Part 15 C Section 15.247 (e)
Limit:	8dBm/3kHz
Test setup:	
Test Instruments:	Refer to section 5.8 for details
Test mode:	Refer to section 5.3 for details
Test results:	Passed
Measurement Data:	Refer to Appendix A – 900MHz, Appendix B – 2.4GHz,

## 6.6 Band Edge

### 6.6.1 Conducted Emission Method

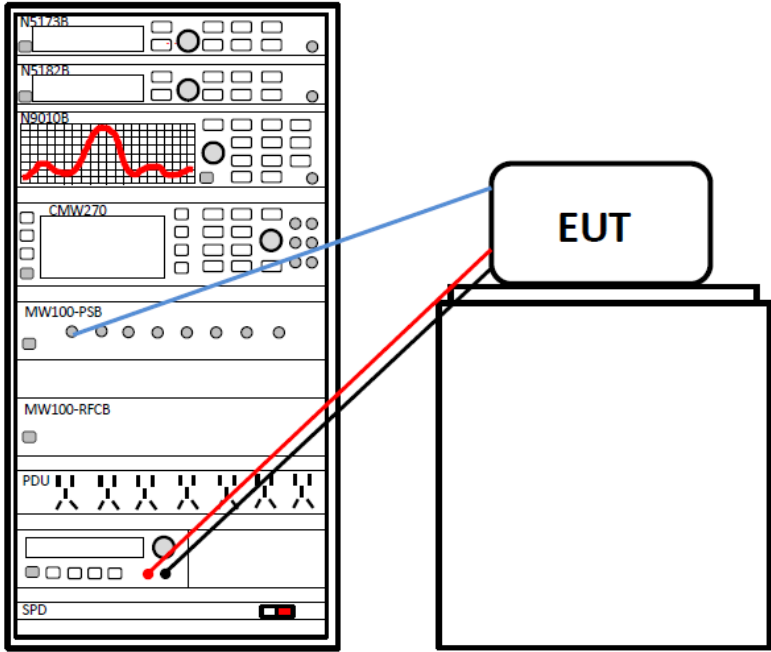
Test Requirement:	FCC Part 15 C Section 15.247 (d)
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph(b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.
Test setup:	 <p>The diagram illustrates the test setup for conducted emission testing. On the left is a rack of instruments including a spectrum analyzer (N5173B), a signal generator (N5182B), a spectrum analyzer (N9010B), a signal analyzer (CMW270), a power supply (MW100-PSB), a radio frequency comb (MW100-RFCB), a power distribution unit (PDU), and a safety device (SPD). On the right is the Equipment Under Test (EUT). Red and blue lines indicate the connections between the instruments and the EUT.</p>
Test Instruments:	Refer to section 5.8 for details
Test mode:	Refer to section 5.3 for details
Test results:	Passed
Measurement Data:	Refer to Appendix A – 900MHz, Appendix B – 2.4GHz,

**6.6.2 Radiated Emission Method**

Test Requirement:	FCC Part 15 C Section 15.209 and 15.205				
Test Frequency Range:	900MHz:960 MHz to 1240 MHz 2.4GHz: 2310 MHz to 2390 MHz and 2483.5 MHz to 2500 MHz				
Test Distance:	3m				
Receiver setup:	Frequency	Detector	RBW	VBW	Remark
	Above 1GHz	Peak RMS	1MHz 1MHz	3MHz 3MHz	Peak Value Average Value
Limit:	Frequency	Limit (dBuV/m @3m)		Remark	
	Above 1GHz	54.00 74.00		Average Value Peak Value	
Test Procedure:	<ol style="list-style-type: none"> <li>1. The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.</li> <li>2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.</li> <li>3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both Vertical and Horizontal polarizations of the antenna are set to make the measurement.</li> <li>4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.</li> <li>5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.</li> <li>6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.</li> </ol>				
Test setup:					
Test Instruments:	Refer to section 5.8 for details				
Test mode:	Refer to section 5.3 for details				
Test results:	Passed				

**BW: 1.4MHz**

<b>Product Name:</b>	DragonFish Ground Control Station	<b>Product Model:</b>	DFRC-2
<b>Test By:</b>	Mike	<b>Test mode:</b>	900MHz-QPSK Tx mode
<b>Test Channel:</b>	Lowest channel	<b>Polarization:</b>	Horizontal
<b>Test Voltage:</b>	DC 11.4V	<b>Environment:</b>	Temp: 24°C Humi: 57%

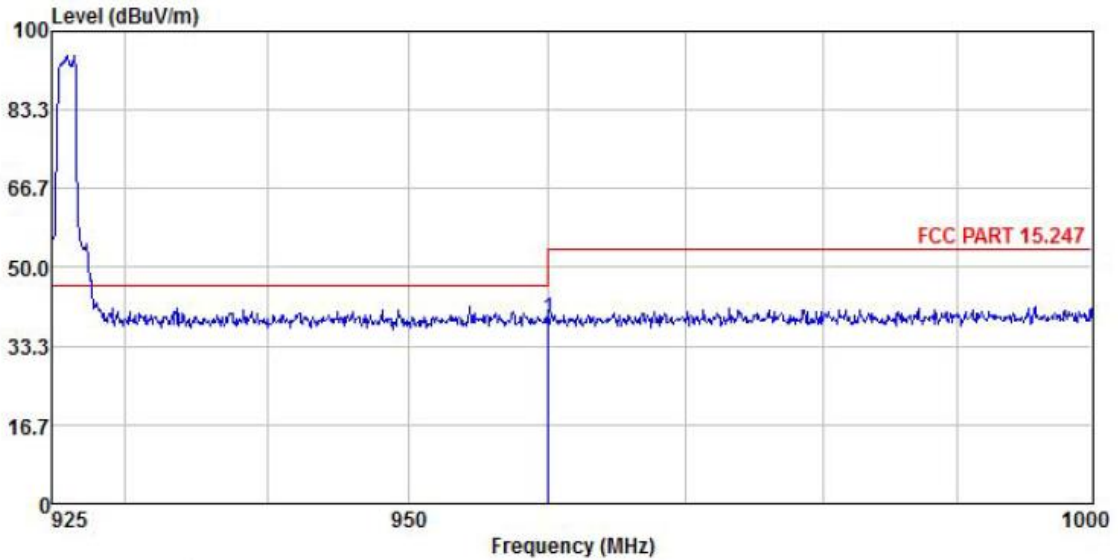


	ReadAntenna	Cable Preamp	Limit	Over					
Freq	Level	Factor	Loss	Factor	Level				
MHz	dBuV	dB/m	dB	dB	dBuV/m				
1	960.046	12.60	22.86	3.51	0.00	38.97	54.00	-15.03	

**Remark:**

- Final Level = Receiver Read level + Factor(Antenna Factor + Cable Loss – Pre-amplifier Factor).
- The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

<b>Product Name:</b>	DragonFish Ground Control Station	<b>Product Model:</b>	DFRC-2
<b>Test By:</b>	Mike	<b>Test mode:</b>	900MHz-QPSK Tx mode
<b>Test Channel:</b>	Lowest channel	<b>Polarization:</b>	Vertical
<b>Test Voltage:</b>	DC 11.4V	<b>Environment:</b>	Temp: 24°C Huni: 57%

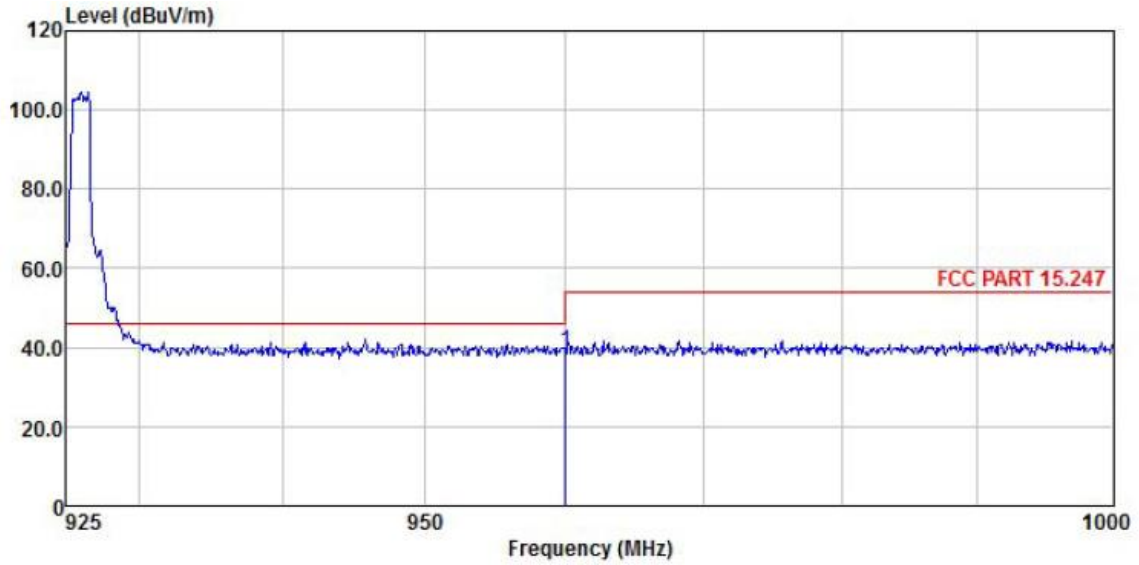


	Read	Antenna	Cable	Preamp	Level	Limit	Over	
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	960.046	12.76	22.86	3.51	0.00	39.13	54.00	-14.87

**Remark:**

- Final Level = Receiver Read level + Factor(Antenna Factor + Cable Loss – Preamplifier Factor).
- The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

<b>Product Name:</b>	DragonFish Ground Control Station	<b>Product Model:</b>	DFRC-2
<b>Test By:</b>	Mike	<b>Test mode:</b>	900MHz-QPSK Tx mode
<b>Test Channel:</b>	Highest channel	<b>Polarization:</b>	Horizontal
<b>Test Voltage:</b>	DC 11.4V	<b>Environment:</b>	Temp: 24°C Humi: 57%

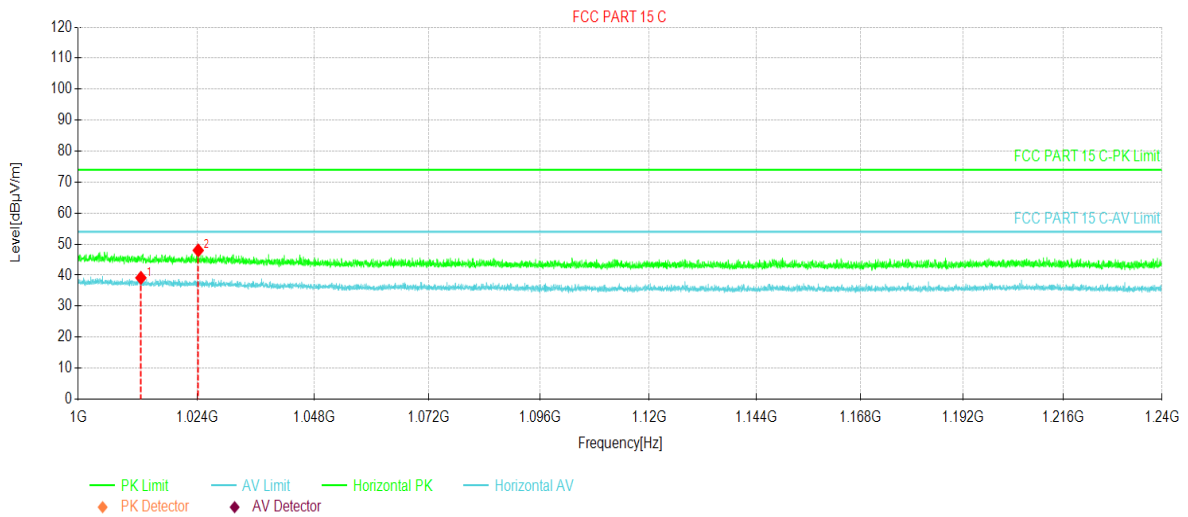


Suspected Data List								
NO.	Freq. [MHz]	Reading [dBuV/m]	Level [dBuV/m]	Factor [dB]	Limit [dBuV/m]	Margin [dB]	Trace	Polarity
1	1012.54	35.43	39.13	3.70	54.00	14.87	AV	Horizontal
2	1024.12	44.63	47.99	3.36	74.00	26.01	PK	Horizontal

**Remark:**

- Final Level = Receiver Read level + Factor(Antenna Factor + Cable Loss – Pre-amplifier Factor).
- The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

<b>Product Name:</b>	DragonFish Ground Control Station	<b>Product Model:</b>	DFRC-2
<b>Test By:</b>	Mike	<b>Test mode:</b>	900MHz-QPSK Tx mode
<b>Test Channel:</b>	Highest channel	<b>Polarization:</b>	Vertical
<b>Test Voltage:</b>	DC 11.4V	<b>Environment:</b>	Temp: 24°C Huni: 57%

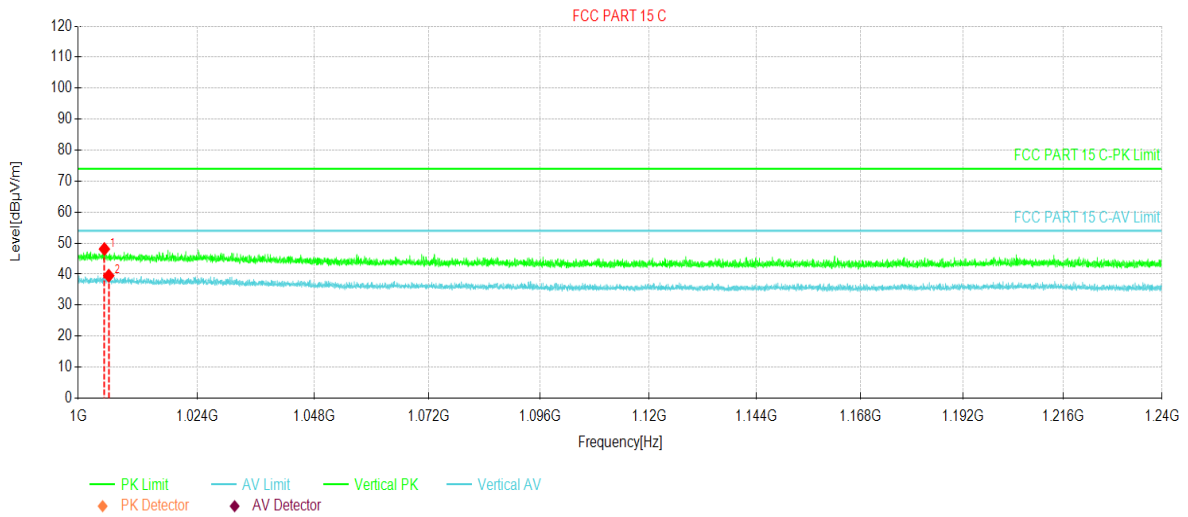


Suspected Data List								
NO.	Freq. [MHz]	Reading [dBuV/m]	Level [dBuV/m]	Factor [dB]	Limit [dBuV/m]	Margin [dB]	Trace	Polarity
1.	1005.22	44.17	48.09	3.92	74.00	25.91	PK	Vertical
2.	1006.09	35.61	39.50	3.89	54.00	14.50	AV	Vertical

**Remark:**

- Final Level = Receiver Read level + Factor(Antenna Factor + Cable Loss – Pre-amplifier Factor).
- The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

<b>Product Name:</b>	DragonFish Ground Control Station	<b>Product Model:</b>	DFRC-2
<b>Test By:</b>	Mike	<b>Test mode:</b>	900MHz-16QAM Tx mode
<b>Test Channel:</b>	Lowest channel	<b>Polarization:</b>	Horizontal
<b>Test Voltage:</b>	DC 11.4V	<b>Environment:</b>	Temp: 24°C Huni: 57%

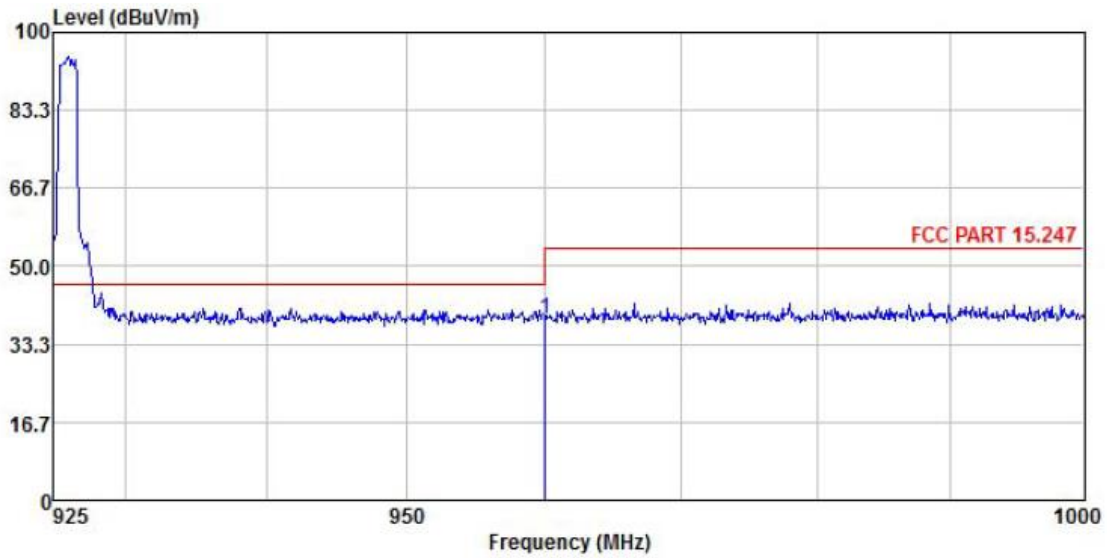


	Read	Antenna	Cable	Preamp	Limit	Over	
Freq	Level	Factor	Loss	Factor	Line	Limit	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1	960.046	12.48	22.86	3.51	0.00	38.85	54.00 -15.15

**Remark:**

- Final Level = Receiver Read level + Factor(Antenna Factor + Cable Loss – Preamplifier Factor).
- The emission levels of other frequencies are lower than the limit 20dB and not show in test report.



<b>Product Name:</b>	DragonFish Ground Control Station	<b>Product Model:</b>	DFRC-2
<b>Test By:</b>	Mike	<b>Test mode:</b>	900MHz-16QAM Tx mode
<b>Test Channel:</b>	Lowest channel	<b>Polarization:</b>	Vertical
<b>Test Voltage:</b>	DC 11.4V	<b>Environment:</b>	Temp: 24°C Huni: 57%

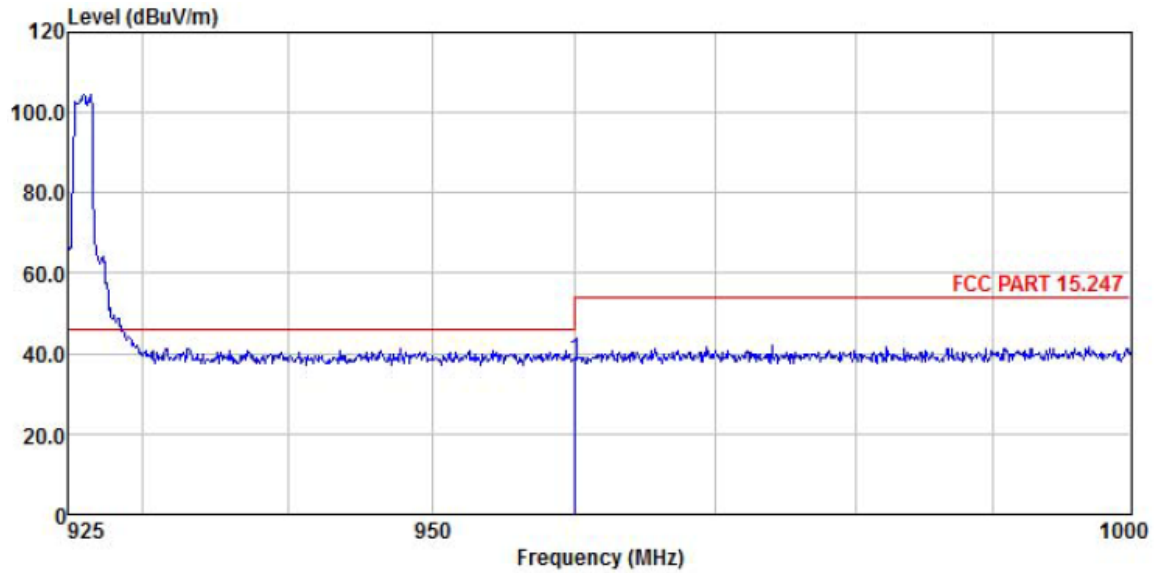


	Read	Antenna	Cable	Preamp	Limit	Over	
Freq	Level	Factor	Loss	Factor	Line	Limit	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1	960.046	12.11	22.86	3.51	0.00	38.48	54.00 -15.52

**Remark:**

- Final Level = Receiver Read level + Factor(Antenna Factor + Cable Loss – Preamplifier Factor).
- The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

<b>Product Name:</b>	DragonFish Ground Control Station	<b>Product Model:</b>	DFRC-2
<b>Test By:</b>	Mike	<b>Test mode:</b>	900MHz-16QAM Tx mode
<b>Test Channel:</b>	Highest channel	<b>Polarization:</b>	Horizontal
<b>Test Voltage:</b>	DC 11.4V	<b>Environment:</b>	Temp: 24°C Humi: 57%

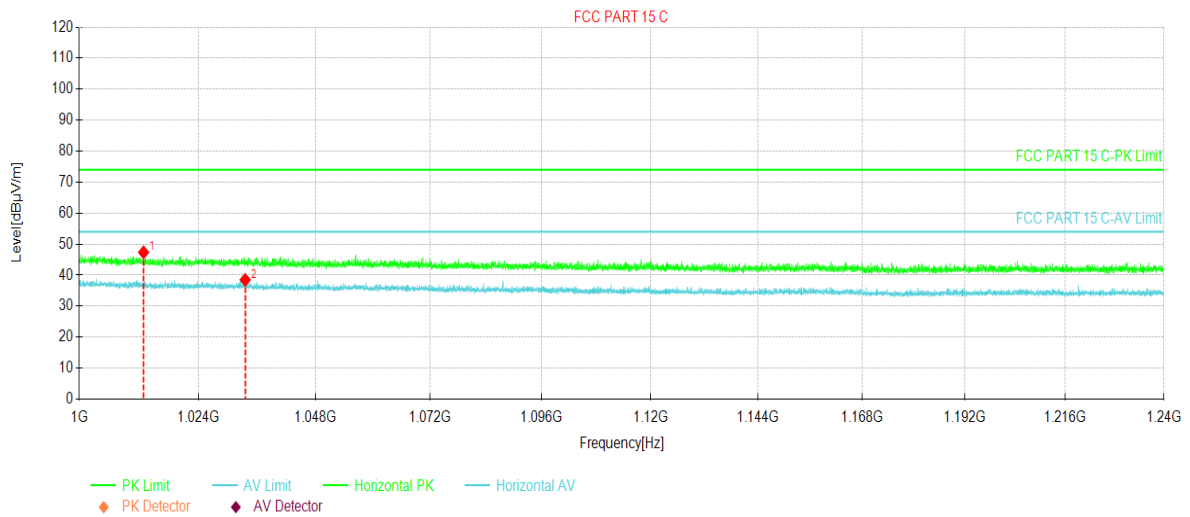


Suspected Data List								
NO.	Freq. [MHz]	Reading [dBµV/m]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Trace	Polarity
1	1012.84	44.40	47.34	2.94	74.00	26.66	PK	Horizontal
2	1033.45	35.88	38.49	2.61	54.00	15.51	AV	Horizontal

**Remark:**

- Final Level = Receiver Read level + Factor(Antenna Factor + Cable Loss – Preamplifier Factor).
- The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

<b>Product Name:</b>	DragonFish Ground Control Station	<b>Product Model:</b>	DFRC-2
<b>Test By:</b>	Mike	<b>Test mode:</b>	900MHz-16QAM Tx mode
<b>Test Channel:</b>	Highest channel	<b>Polarization:</b>	Vertical
<b>Test Voltage:</b>	DC 11.4V	<b>Environment:</b>	Temp: 24°C Huni: 57%

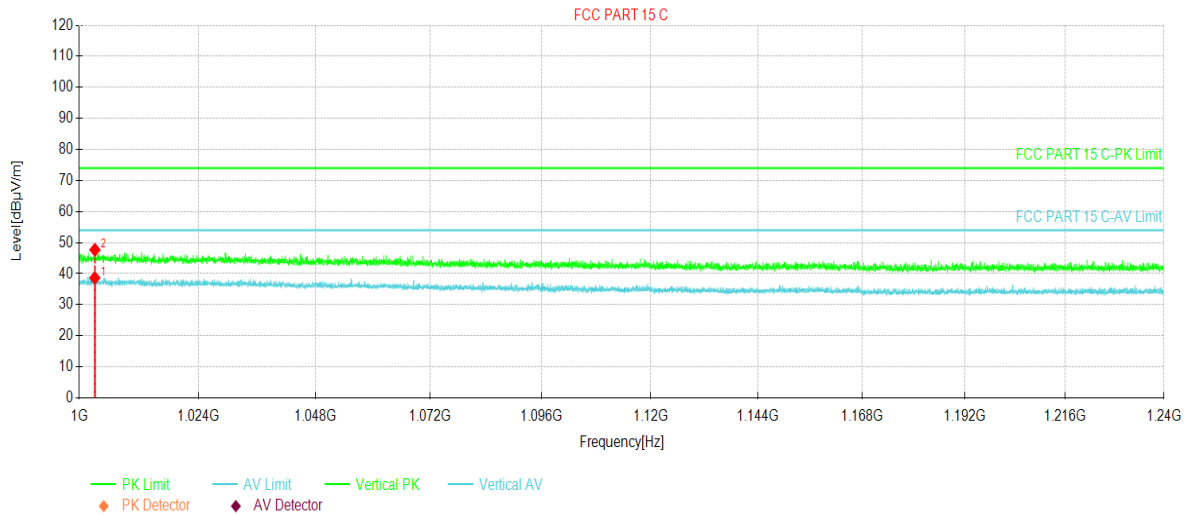


Suspected Data List								
NO.	Freq. [MHz]	Reading [dBµV/m]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Trace	Polarity
1.	1003.09	35.54.	38.63.	3.09.	54.00.	15.37.	AV.	Vertical.
2.	1003.12	44.59.	47.68.	3.09.	74.00.	26.32.	PK.	Vertical.

**Remark:**

- Final Level = Receiver Read level + Factor(Antenna Factor + Cable Loss – Pre-amplifier Factor).
- The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

<b>Product Name:</b>	DragonFish Ground Control Station	<b>Product Model:</b>	DFRC-2
<b>Test By:</b>	Mike	<b>Test mode:</b>	2.4GHz-QPSK Tx mode
<b>Test Channel:</b>	Lowest channel	<b>Polarization:</b>	Horizontal
<b>Test Voltage:</b>	DC 11.4V	<b>Environment:</b>	Temp: 24°C Huni: 57%

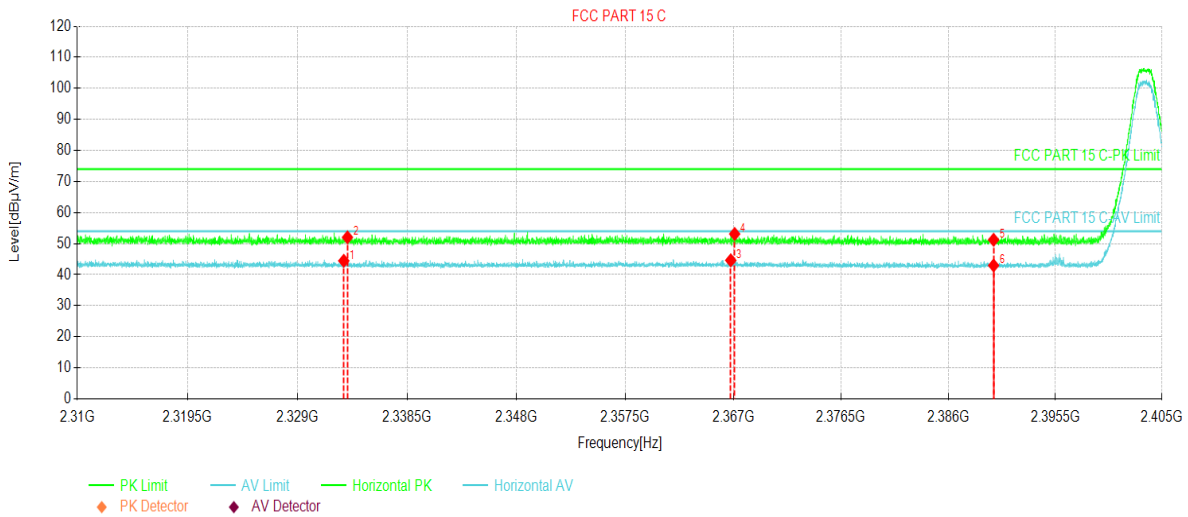


Suspected Data List								
NO.	Freq. [MHz]	Reading [dBµV/m]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Trace	Polarity
1	2332.99	37.58	44.47	6.89	54.00	9.53	AV	Horizontal
2	2333.31	45.14	52.03	6.89	74.00	21.97	PK	Horizontal
3	2366.77	37.62	44.62	7.00	54.00	9.38	AV	Horizontal
4	2367.11	46.11	53.11	7.00	74.00	20.89	PK	Horizontal
5	2390.00	44.16	51.24	7.08	74.00	22.76	PK	Horizontal
6	2390.00	35.89	42.97	7.08	54.00	11.03	AV	Horizontal

**Remark:**

- Final Level = Receiver Read level + Factor(Antenna Factor + Cable Loss – Preamplifier Factor).
- The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

<b>Product Name:</b>	DragonFish Ground Control Station	<b>Product Model:</b>	DFRC-2
<b>Test By:</b>	Mike	<b>Test mode:</b>	2.4GHz-QPSK Tx mode
<b>Test Channel:</b>	Lowest channel	<b>Polarization:</b>	Vertical
<b>Test Voltage:</b>	DC 11.4V	<b>Environment:</b>	Temp: 24°C Huni: 57%

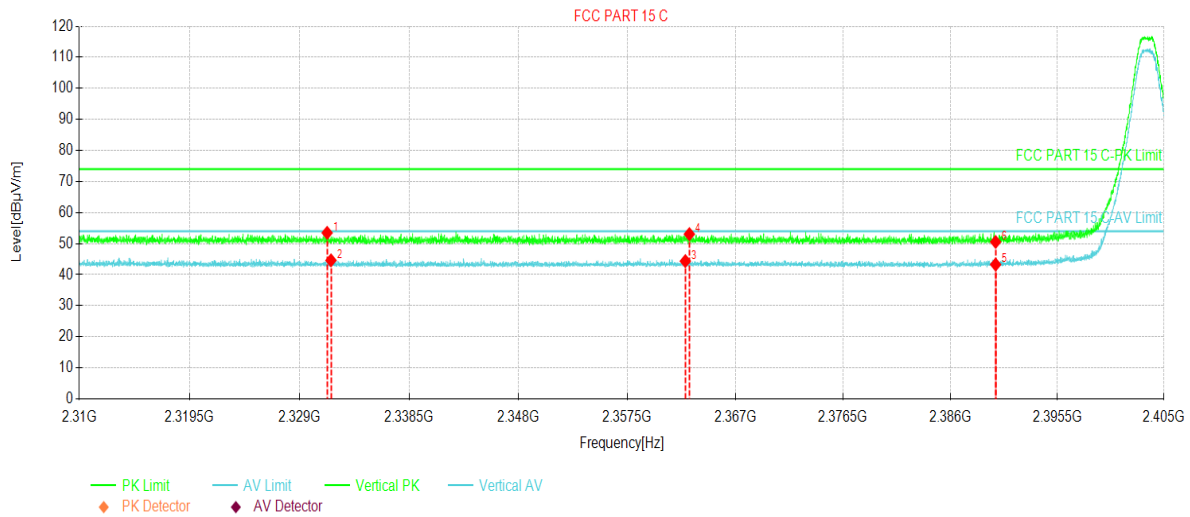


Suspected Data List								
NO.	Freq. [MHz]	Reading [dBµV/m]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Trace	Polarity
1	2331.37	46.59	53.47	6.88	74.00	20.53	PK	Vertical
2	2331.70	37.73	44.61	6.88	54.00	9.39	AV	Vertical
3	2362.60	37.39	44.38	6.99	54.00	9.62	AV	Vertical
4	2362.96	46.07	53.06	6.99	74.00	20.94	PK	Vertical
5	2390.00	36.19	43.27	7.08	54.00	10.73	AV	Vertical
6	2390.00	43.46	50.54	7.08	74.00	23.46	PK	Vertical

**Remark:**

- Final Level = Receiver Read level + Factor(Antenna Factor + Cable Loss – Preamplifier Factor).
- The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

<b>Product Name:</b>	DragonFish Ground Control Station	<b>Product Model:</b>	DFRC-2
<b>Test By:</b>	Mike	<b>Test mode:</b>	2.4GHz-QPSK Tx mode
<b>Test Channel:</b>	Highest channel	<b>Polarization:</b>	Horizontal
<b>Test Voltage:</b>	DC 11.4V	<b>Environment:</b>	Temp: 24°C Huni: 57%

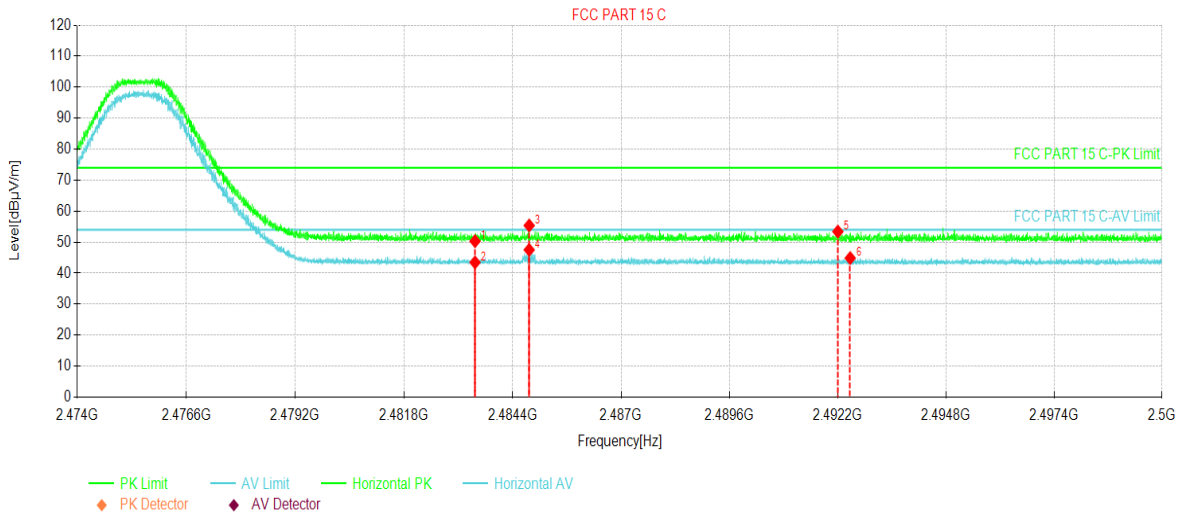


Suspected Data List								
NO.	Freq. [MHz]	Reading [dBµV/m]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Trace	Polarity
1	2483.50	42.64	50.33	7.69	74.00	23.67	PK	Horizontal
2	2483.50	35.78	43.47	7.69	54.00	10.53	AV	Horizontal
3	2484.79	47.66	55.36	7.70	74.00	18.64	PK	Horizontal
4	2484.79	39.81	47.51	7.70	54.00	6.49	AV	Horizontal
5	2492.20	45.66	53.41	7.75	74.00	20.59	PK	Horizontal
6	2492.49	37.11	44.86	7.75	54.00	9.14	AV	Horizontal

**Remark:**

- Final Level = Receiver Read level + Factor(Antenna Factor + Cable Loss – Preamplifier Factor).
- The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

<b>Product Name:</b>	DragonFish Ground Control Station	<b>Product Model:</b>	DFRC-2
<b>Test By:</b>	Mike	<b>Test mode:</b>	2.4GHz-QPSK Tx mode
<b>Test Channel:</b>	Highest channel	<b>Polarization:</b>	Vertical
<b>Test Voltage:</b>	DC 11.4V	<b>Environment:</b>	Temp: 24°C Huni: 57%

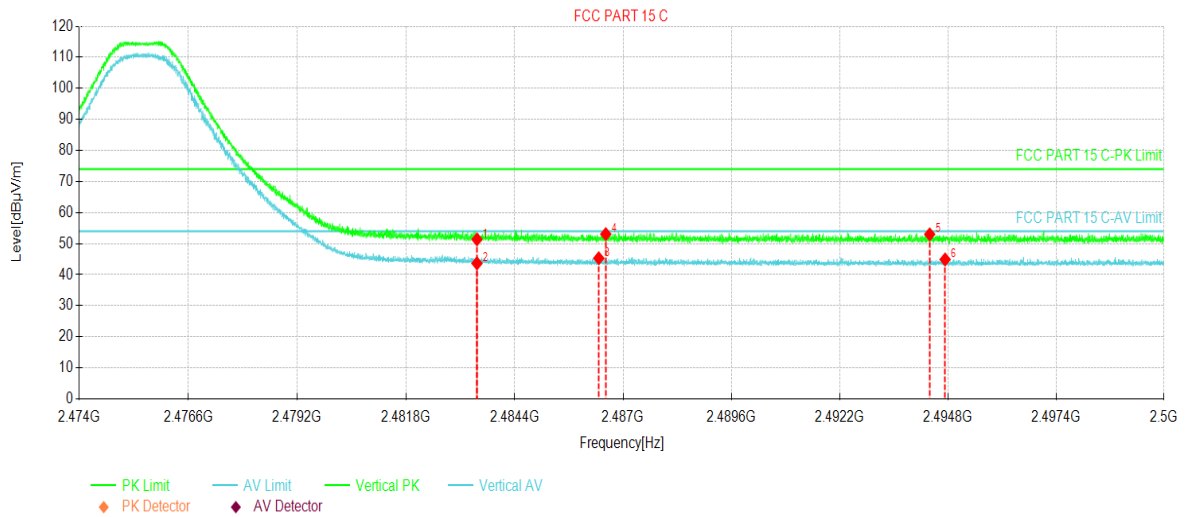


Suspected Data List								
NO.	Freq. [MHz]	Reading [dBµV/m]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Trace	Polarity
1	2483.50	43.67	51.36	7.69	74.00	22.64	PK	Vertical
2	2483.50	35.95	43.64	7.69	54.00	10.36	AV	Vertical
3	2486.41	37.59	45.30	7.71	54.00	8.70	AV	Vertical
4	2486.58	45.34	53.05	7.71	74.00	20.95	PK	Vertical
5	2494.36	45.23	52.99	7.76	74.00	21.01	PK	Vertical
6	2494.73	37.13	44.89	7.76	54.00	9.11	AV	Vertical

**Remark:**

- Final Level = Receiver Read level + Factor(Antenna Factor + Cable Loss – Preamplifier Factor).
- The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

<b>Product Name:</b>	DragonFish Ground Control Station	<b>Product Model:</b>	DFRC-2
<b>Test By:</b>	Mike	<b>Test mode:</b>	2.4GHz-16QAM Tx mode
<b>Test Channel:</b>	Lowest channel	<b>Polarization:</b>	Horizontal
<b>Test Voltage:</b>	DC 11.4V	<b>Environment:</b>	Temp: 24°C Huni: 57%

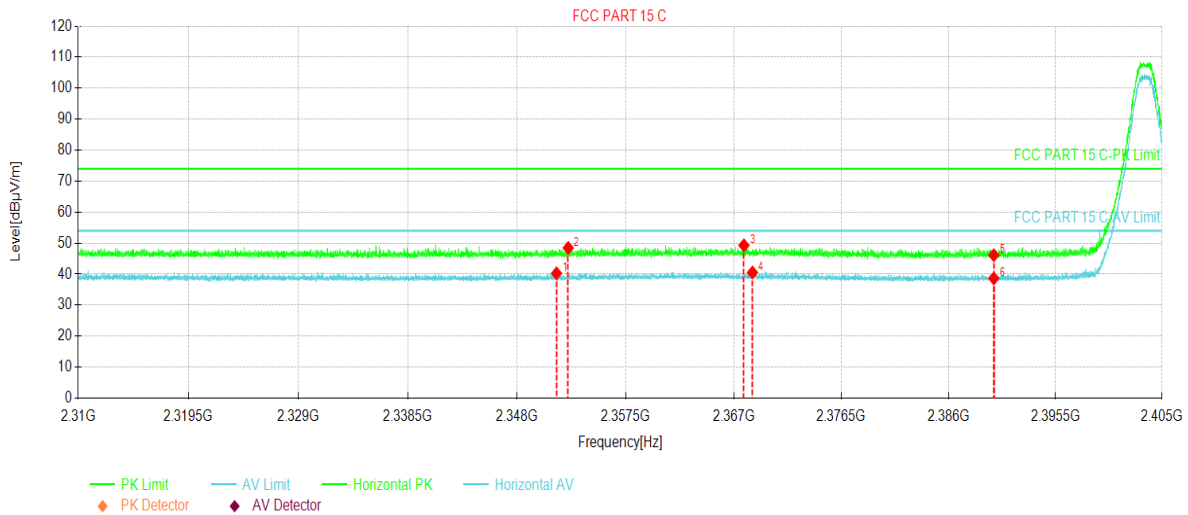


Suspected Data List								
NO.	Freq. [MHz]	Reading [dBuV/m]	Level [dBuV/m]	Factor [dB]	Limit [dBuV/m]	Margin [dB]	Trace	Polarity
1	2351.45	33.31	40.26	6.95	54.00	13.74	AV	Horizontal
2	2352.47	41.50	48.45	6.95	74.00	25.55	PK	Horizontal
3	2367.90	42.28	49.28	7.00	74.00	24.72	PK	Horizontal
4	2368.65	33.51	40.52	7.01	54.00	13.48	AV	Horizontal
5	2390.00	39.04	46.12	7.08	74.00	27.88	PK	Horizontal
6	2390.00	31.54	38.62	7.08	54.00	15.38	AV	Horizontal

**Remark:**

- Final Level = Receiver Read level + Factor(Antenna Factor + Cable Loss – Preamplifier Factor).
- The emission levels of other frequencies are lower than the limit 20dB and not show in test report.



<b>Product Name:</b>	DragonFish Ground Control Station	<b>Product Model:</b>	DFRC-2
<b>Test By:</b>	Mike	<b>Test mode:</b>	2.4GHz-16QAM Tx mode
<b>Test Channel:</b>	Lowest channel	<b>Polarization:</b>	Vertical
<b>Test Voltage:</b>	DC 11.4V	<b>Environment:</b>	Temp: 24°C Humi: 57%

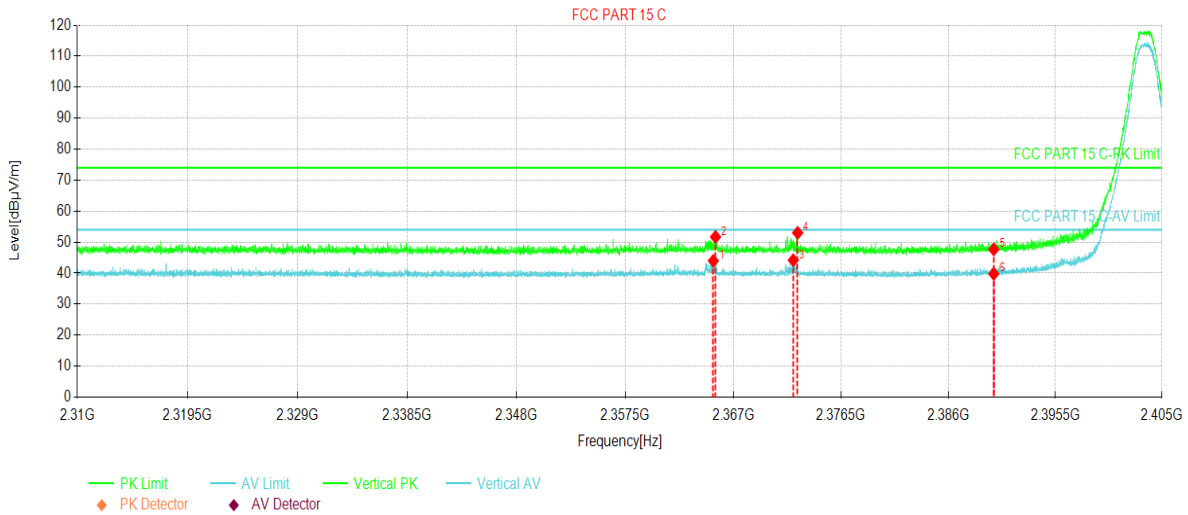


Suspected Data List								
NO.	Freq. [MHz]	Reading [dBµV/m]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Trace	Polarity
1	2365.24	36.97	43.97	7.00	54.00	10.03	AV	Vertical
2	2365.43	44.69	51.69	7.00	74.00	22.31	PK	Vertical
3	2372.27	37.14	44.16	7.02	54.00	9.84	AV	Vertical
4	2372.66	45.99	53.01	7.02	74.00	20.99	PK	Vertical
5	2390.01	40.61	47.69	7.08	74.00	26.31	PK	Vertical
6	2390.01	32.71	39.79	7.08	54.00	14.21	AV	Vertical

**Remark:**

- Final Level = Receiver Read level + Factor(Antenna Factor + Cable Loss – Preamplifier Factor).
- The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

<b>Product Name:</b>	DragonFish Ground Control Station	<b>Product Model:</b>	DFRC-2
<b>Test By:</b>	Mike	<b>Test mode:</b>	2.4GHz-16QAM Tx mode
<b>Test Channel:</b>	Highest channel	<b>Polarization:</b>	Horizontal
<b>Test Voltage:</b>	DC 11.4V	<b>Environment:</b>	Temp: 24°C Humi: 57%

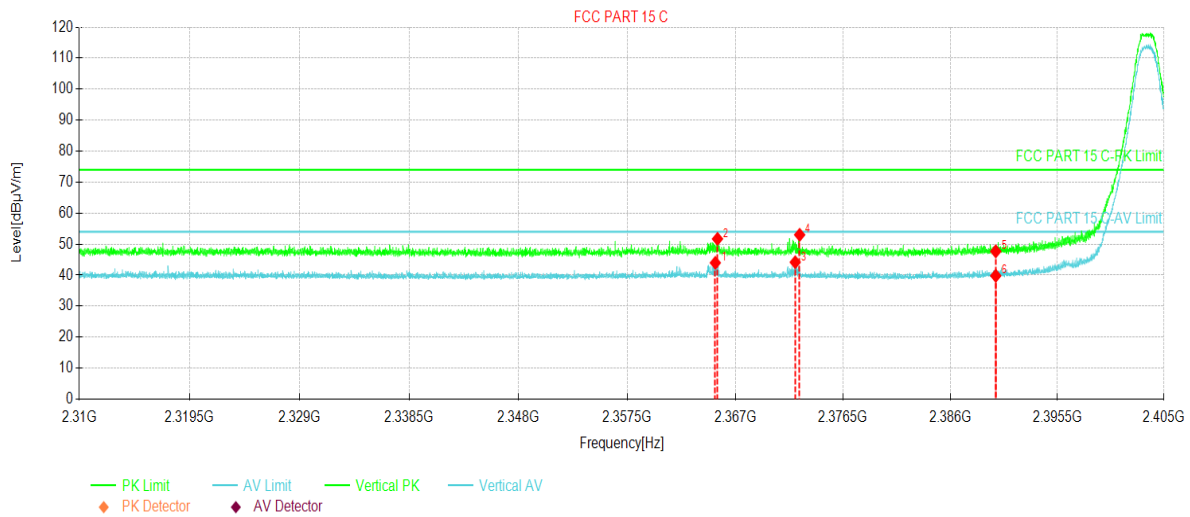


Suspected Data List								
NO.	Freq. [MHz]	Reading [dBµV/m]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Trace	Polarity
1	2483.50	39.62	47.31	7.69	74.00	26.69	PK	Horizontal
2	2483.50	31.18	38.87	7.69	54.00	15.13	AV	Horizontal
3	2483.94	37.49	45.18	7.69	54.00	8.82	AV	Horizontal
4	2484.05	44.26	51.95	7.69	74.00	22.05	PK	Horizontal
5	2485.83	42.59	50.29	7.70	74.00	23.71	PK	Horizontal
6	2485.92	36.06	43.76	7.70	54.00	10.24	AV	Horizontal

**Remark:**

- Final Level = Receiver Read level + Factor(Antenna Factor + Cable Loss – Preamplifier Factor).
- The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

<b>Product Name:</b>	DragonFish Ground Control Station	<b>Product Model:</b>	DFRC-2
<b>Test By:</b>	Mike	<b>Test mode:</b>	2.4GHz-16QAM Tx mode
<b>Test Channel:</b>	Highest channel	<b>Polarization:</b>	Vertical
<b>Test Voltage:</b>	DC 11.4V	<b>Environment:</b>	Temp: 24°C Huni: 57%

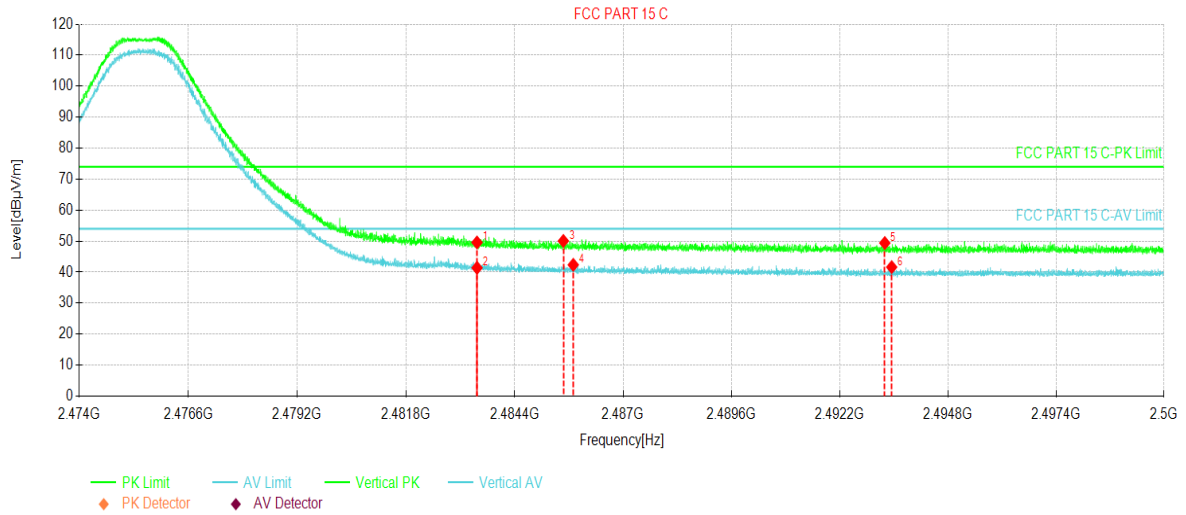


Suspected Data List								
NO.	Freq. [MHz]	Reading [dBµV/m]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Trace	Polarity
1	2483.50	41.88	49.57	7.69	74.00	24.43	PK	Vertical
2	2483.50	33.70	41.39	7.69	54.00	12.61	AV	Vertical
3	2485.57	42.36	50.06	7.70	74.00	23.94	PK	Vertical
4	2485.80	34.66	42.36	7.70	54.00	11.64	AV	Vertical
5	2493.28	41.64	49.39	7.75	74.00	24.61	PK	Vertical
6	2493.44	33.86	41.61	7.75	54.00	12.39	AV	Vertical

**Remark:**

- Final Level = Receiver Read level + Factor(Antenna Factor + Cable Loss – Pre-amplifier Factor).
- The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

**BW: 10MHz**

<b>Product Name:</b>	DragonFish Ground Control Station	<b>Product Model:</b>	DFRC-2
<b>Test By:</b>	Mike	<b>Test mode:</b>	900MHz-QPSK Tx mode
<b>Test Channel:</b>	Lowest channel	<b>Polarization:</b>	Horizontal
<b>Test Voltage:</b>	DC 11.4V	<b>Environment:</b>	Temp: 24°C Humi: 57%

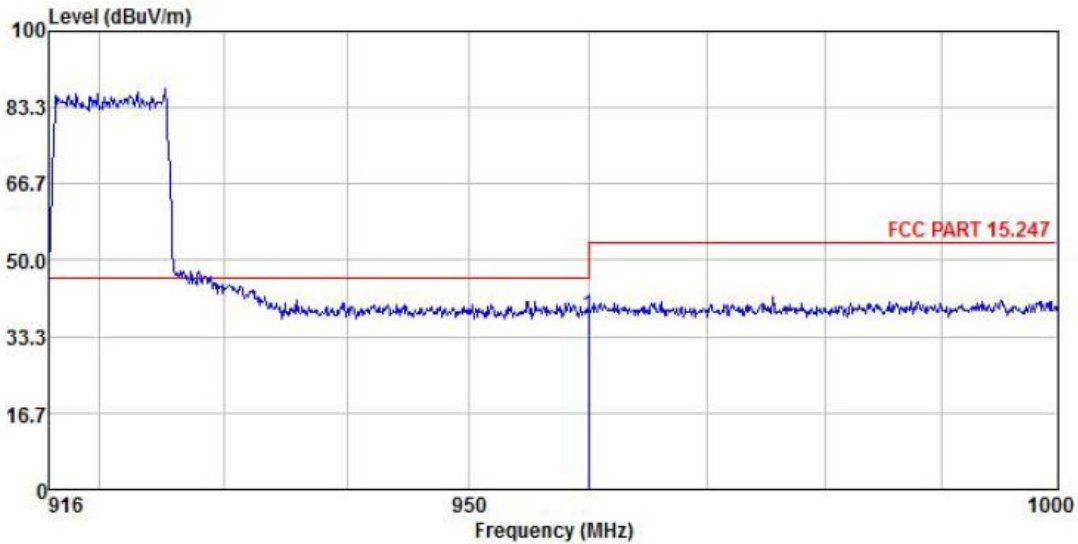


	ReadAntenna	Cable Preamp	Limit	Over					
Freq	Level	Factor	Loss	Factor	Level				
MHz	dBuV	dB/m	dB	dB	dBuV/m				
1	960.023	11.59	22.86	3.51	0.00	37.96	54.00	-16.04	

**Remark:**

1. Final Level = Receiver Read level + Factor(Antenna Factor + Cable Loss – Pre-amplifier Factor).
2. The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

<b>Product Name:</b>	DragonFish Ground Control Station	<b>Product Model:</b>	DFRC-2
<b>Test By:</b>	Mike	<b>Test mode:</b>	900MHz-QPSK Tx mode
<b>Test Channel:</b>	Lowest channel	<b>Polarization:</b>	Vertical
<b>Test Voltage:</b>	DC 11.4V	<b>Environment:</b>	Temp: 24°C Huni: 57%

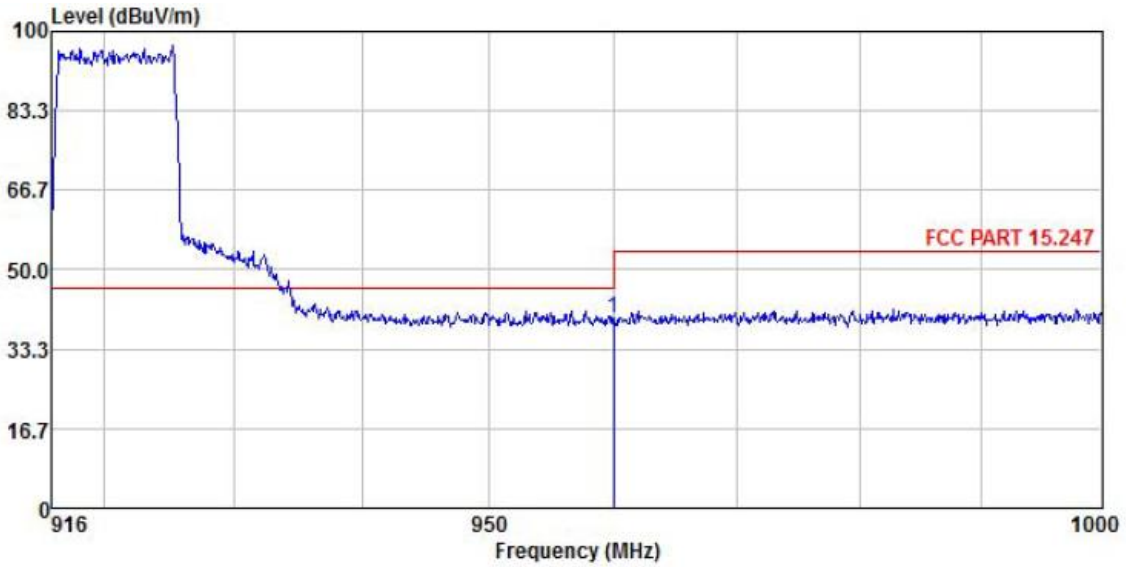


	Read	Antenna	Cable	Preamp	Limit	Over		
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	960.023	13.60	22.86	3.51	0.00	39.97	54.00	-14.03

**Remark:**

- Final Level = Receiver Read level + Factor(Antenna Factor + Cable Loss – Preamplifier Factor).
- The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

<b>Product Name:</b>	DragonFish Ground Control Station	<b>Product Model:</b>	DFRC-2
<b>Test By:</b>	Mike	<b>Test mode:</b>	900MHz-QPSK Tx mode
<b>Test Channel:</b>	Highest channel	<b>Polarization:</b>	Horizontal
<b>Test Voltage:</b>	DC 11.4V	<b>Environment:</b>	Temp: 24°C Huni: 57%

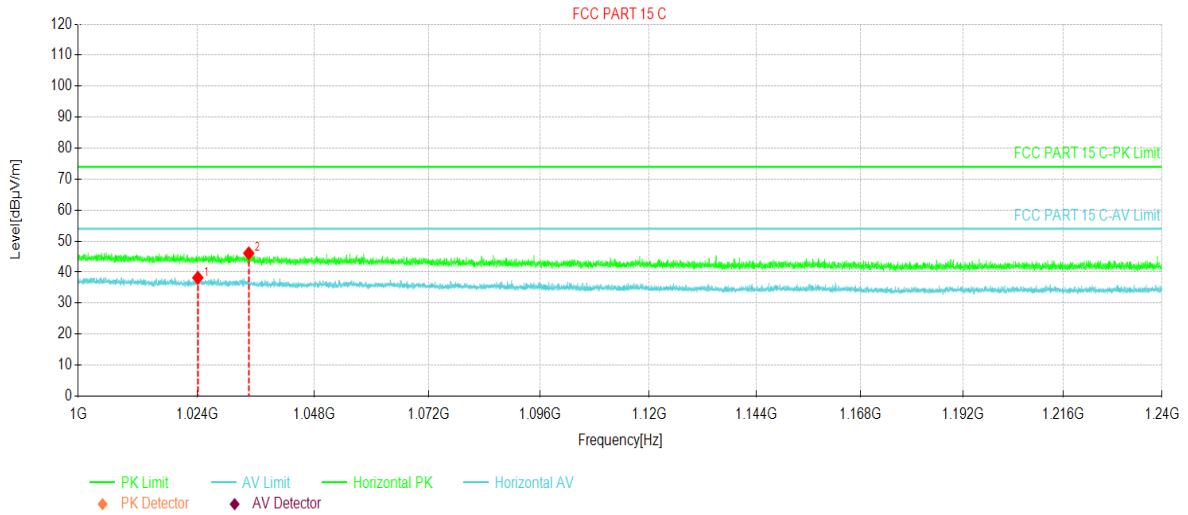


Suspected Data List								
NO.	Freq. [MHz]	Reading [dBµV/m]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Trace	Polarity
1	1024.03	35.42	38.18	2.76	54.00	15.82	AV	Horizontal
2	1034.44	43.48	46.07	2.59	74.00	27.93	PK	Horizontal

**Remark:**

- Final Level = Receiver Read level + Factor(Antenna Factor + Cable Loss – Preamplifier Factor).
- The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

<b>Product Name:</b>	DragonFish Ground Control Station	<b>Product Model:</b>	DFRC-2
<b>Test By:</b>	Mike	<b>Test mode:</b>	900MHz-QPSK Tx mode
<b>Test Channel:</b>	Highest channel	<b>Polarization:</b>	Vertical
<b>Test Voltage:</b>	DC 11.4V	<b>Environment:</b>	Temp: 24°C Humi: 57%

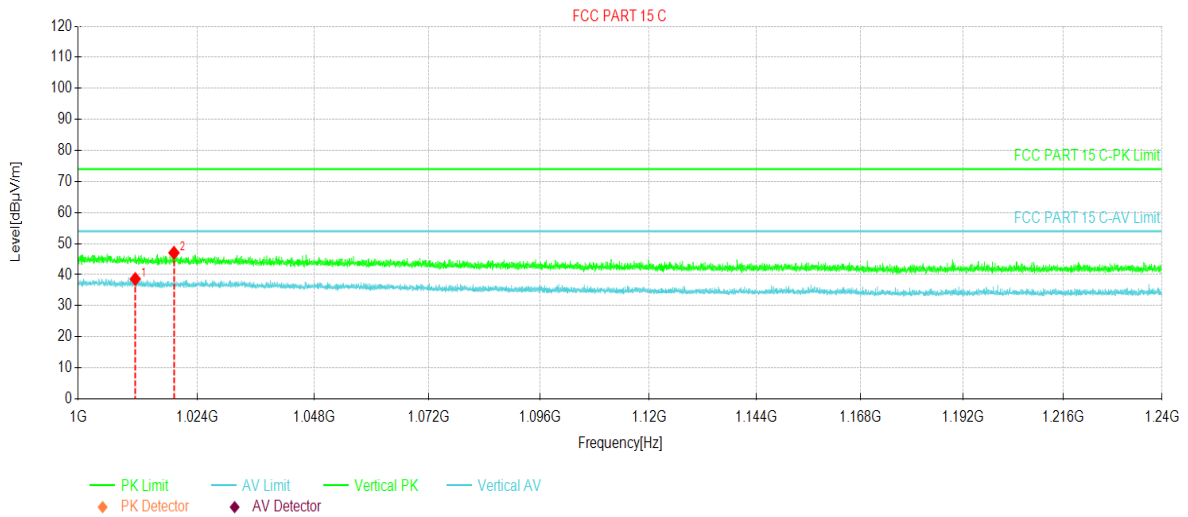


Suspected Data List								
NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Trace	Polarity
1	1011.40	35.65	38.61	2.96	54.00	15.39	AV	Vertical
2	1019.20	44.21	47.04	2.83	74.00	26.96	PK	Vertical

**Remark:**

- Final Level = Receiver Read level + Factor(Antenna Factor + Cable Loss – Pre-amplifier Factor).
- The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

<b>Product Name:</b>	DragonFish Ground Control Station	<b>Product Model:</b>	DFRC-2
<b>Test By:</b>	Mike	<b>Test mode:</b>	900MHz-16QAM Tx mode
<b>Test Channel:</b>	Lowest channel	<b>Polarization:</b>	Horizontal
<b>Test Voltage:</b>	DC 11.4V	<b>Environment:</b>	Temp: 24°C Humi: 57%

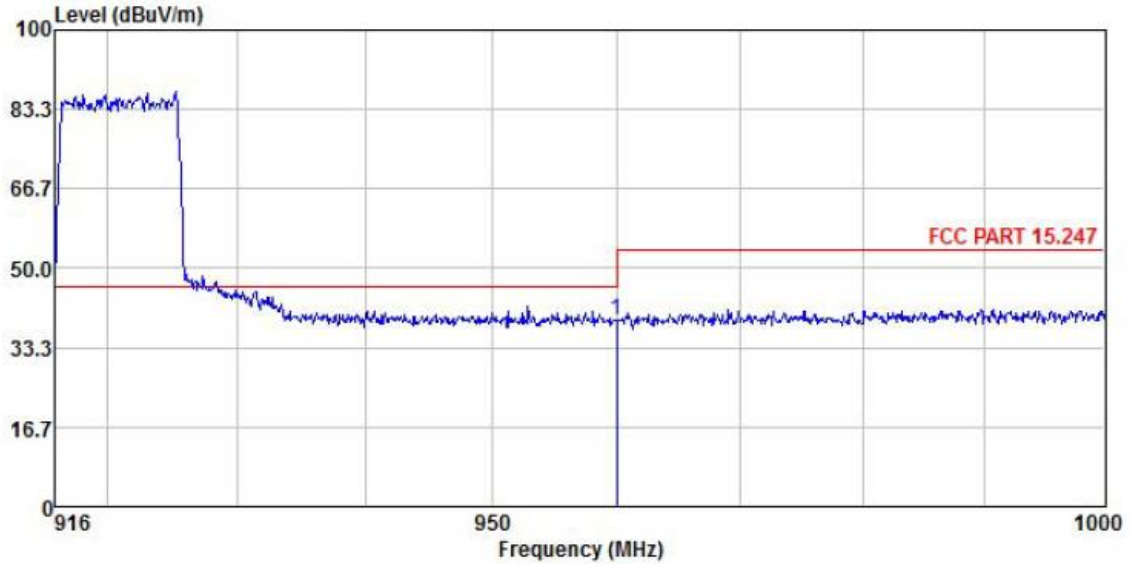


	Read	Antenna	Cable	Preamp	Limit	Over	
Freq	Level	Factor	Loss	Factor	Line	Limit	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1	960.023	12.75	22.86	3.51	0.00	39.12	54.00 -14.88

**Remark:**

- Final Level = Receiver Read level + Factor(Antenna Factor + Cable Loss – Preamplifier Factor).
- The emission levels of other frequencies are lower than the limit 20dB and not show in test report.



<b>Product Name:</b>	DragonFish Ground Control Station	<b>Product Model:</b>	DFRC-2
<b>Test By:</b>	Mike	<b>Test mode:</b>	900MHz-16QAM Tx mode
<b>Test Channel:</b>	Lowest channel	<b>Polarization:</b>	Vertical
<b>Test Voltage:</b>	DC 11.4V	<b>Environment:</b>	Temp: 24°C Huni: 57%

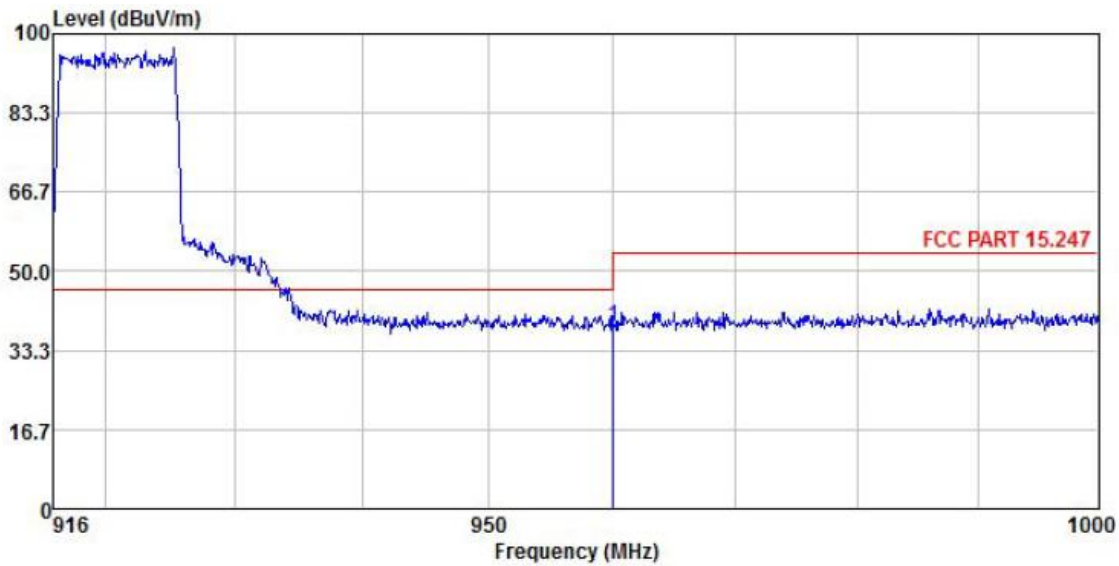


	ReadAntenna	Cable Preamp	Limit	Over					
Freq	Level	Factor	Loss	Factor	Level				
MHz	dBuV	dB/m	dB	dB	dBuV/m				
1	960.107	11.95	22.86	3.51	0.00	38.32	54.00	-15.68	

**Remark:**

- Final Level = Receiver Read level + Factor(Antenna Factor + Cable Loss – Pre-amplifier Factor).
- The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

<b>Product Name:</b>	DragonFish Ground Control Station	<b>Product Model:</b>	DFRC-2
<b>Test By:</b>	Mike	<b>Test mode:</b>	900MHz-16QAM Tx mode
<b>Test Channel:</b>	Highest channel	<b>Polarization:</b>	Horizontal
<b>Test Voltage:</b>	DC 11.4V	<b>Environment:</b>	Temp: 24°C Huni: 57%

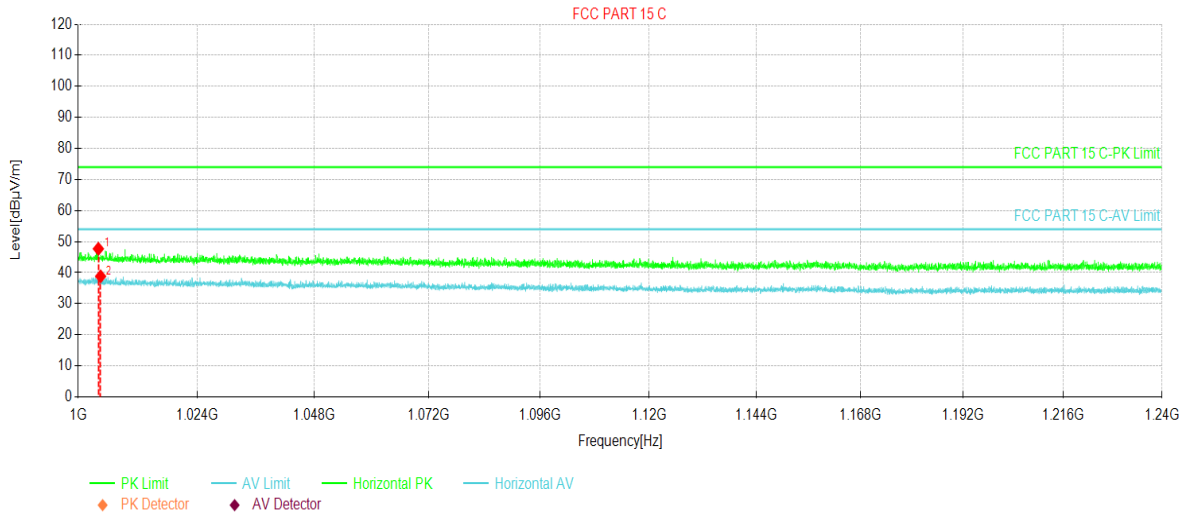


Suspected Data List								
NO.	Freq. [MHz]	Reading [dBµV/m]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Trace	Polarity
1	1004.02	44.60	47.68	3.08	74.00	26.32	PK	Horizontal
2	1004.47	35.75	38.82	3.07	54.00	15.18	AV	Horizontal

**Remark:**

- Final Level = Receiver Read level + Factor(Antenna Factor + Cable Loss – Preamplifier Factor).
- The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

<b>Product Name:</b>	DragonFish Ground Control Station	<b>Product Model:</b>	DFRC-2
<b>Test By:</b>	Mike	<b>Test mode:</b>	900MHz-16QAM Tx mode
<b>Test Channel:</b>	Highest channel	<b>Polarization:</b>	Vertical
<b>Test Voltage:</b>	DC 11.4V	<b>Environment:</b>	Temp: 24°C Humi: 57%

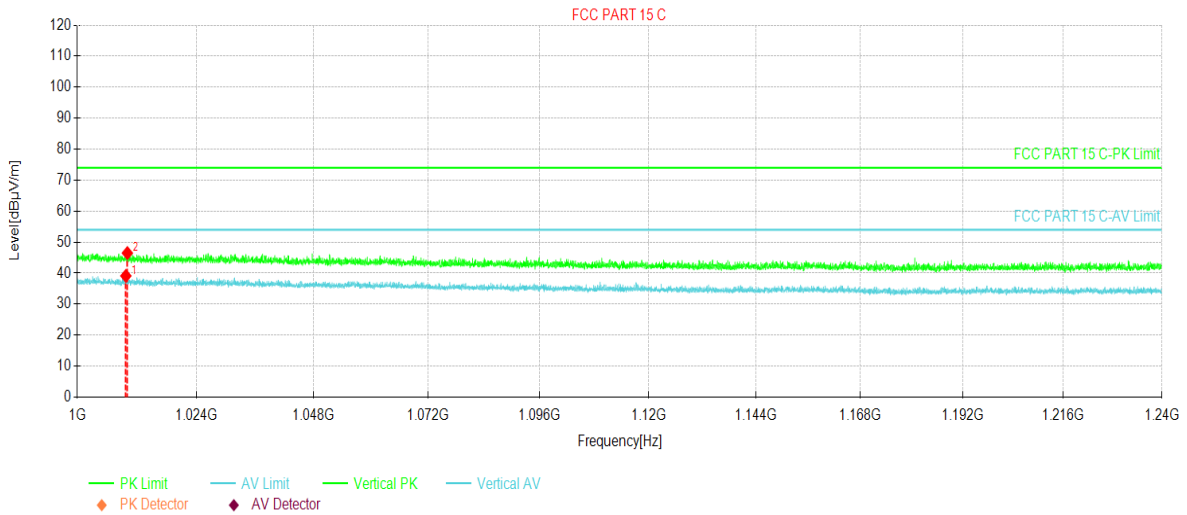


Suspected Data List								
NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Trace	Polarity
1	1009.69	36.11	39.10	2.99	54.00	14.90	AV	Vertical
2	1009.99	43.51	46.49	2.98	74.00	27.51	PK	Vertical

**Remark:**

- Final Level = Receiver Read level + Factor(Antenna Factor + Cable Loss – Preamplifier Factor).
- The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

<b>Product Name:</b>	DragonFish Ground Control Station	<b>Product Model:</b>	DFRC-2
<b>Test By:</b>	Mike	<b>Test mode:</b>	2.4GHz-QPSK Tx mode
<b>Test Channel:</b>	Lowest channel	<b>Polarization:</b>	Horizontal
<b>Test Voltage:</b>	DC 11.4V	<b>Environment:</b>	Temp: 24°C Huni: 57%

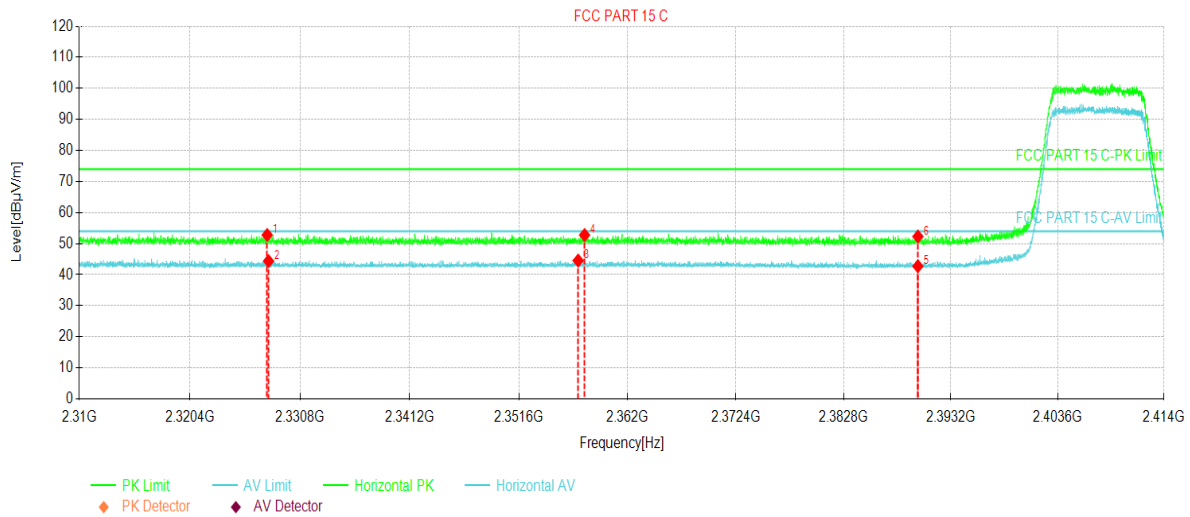


Suspected Data List								
NO.	Freq. [MHz]	Reading [dBµV/m]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Trace	Polarity
1	2327.69	45.91	52.78	6.87	74.00	21.22	PK	Horizontal
2	2327.82	37.50	44.37	6.87	54.00	9.63	AV	Horizontal
3	2357.26	37.57	44.54	6.97	54.00	9.46	AV	Horizontal
4	2357.87	45.79	52.76	6.97	74.00	21.24	PK	Horizontal
5	2390.00	35.65	42.73	7.08	54.00	11.27	AV	Horizontal
6	2390.00	45.21	52.29	7.08	74.00	21.71	PK	Horizontal

**Remark:**

- Final Level = Receiver Read level + Factor(Antenna Factor + Cable Loss – Preamplifier Factor).
- The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

<b>Product Name:</b>	DragonFish Ground Control Station	<b>Product Model:</b>	DFRC-2
<b>Test By:</b>	Mike	<b>Test mode:</b>	2.4GHz-QPSK Tx mode
<b>Test Channel:</b>	Lowest channel	<b>Polarization:</b>	Vertical
<b>Test Voltage:</b>	DC 11.4V	<b>Environment:</b>	Temp: 24°C      Humi: 57%

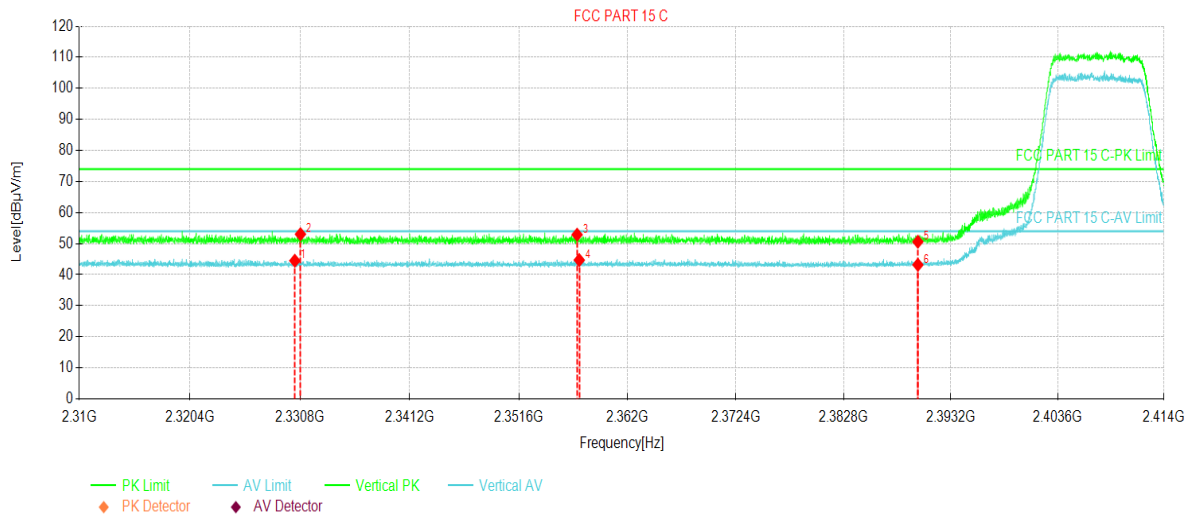


Suspected Data List								
NO.	Freq. [MHz]	Reading [dBuV/m]	Level [dBuV/m]	Factor [dB]	Limit [dBuV/m]	Margin [dB]	Trace	Polarity
1	2330.30	37.61	44.49	6.88	54.00	9.51	AV	Vertical
2	2330.83	46.16	53.04	6.88	74.00	20.96	PK	Vertical
3	2357.16	45.91	52.88	6.97	74.00	21.12	PK	Vertical
4	2357.37	37.74	44.71	6.97	54.00	9.29	AV	Vertical
5	2390.00	43.53	50.61	7.08	74.00	23.39	PK	Vertical
6	2390.00	36.10	43.18	7.08	54.00	10.82	AV	Vertical

**Remark:**

- Final Level = Receiver Read level + Factor(Antenna Factor + Cable Loss – Preamplifier Factor).
- The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

<b>Product Name:</b>	DragonFish Ground Control Station	<b>Product Model:</b>	DFRC-2
<b>Test By:</b>	Mike	<b>Test mode:</b>	2.4GHz-QPSK Tx mode
<b>Test Channel:</b>	Highest channel	<b>Polarization:</b>	Horizontal
<b>Test Voltage:</b>	DC 11.4V	<b>Environment:</b>	Temp: 24°C Huni: 57%

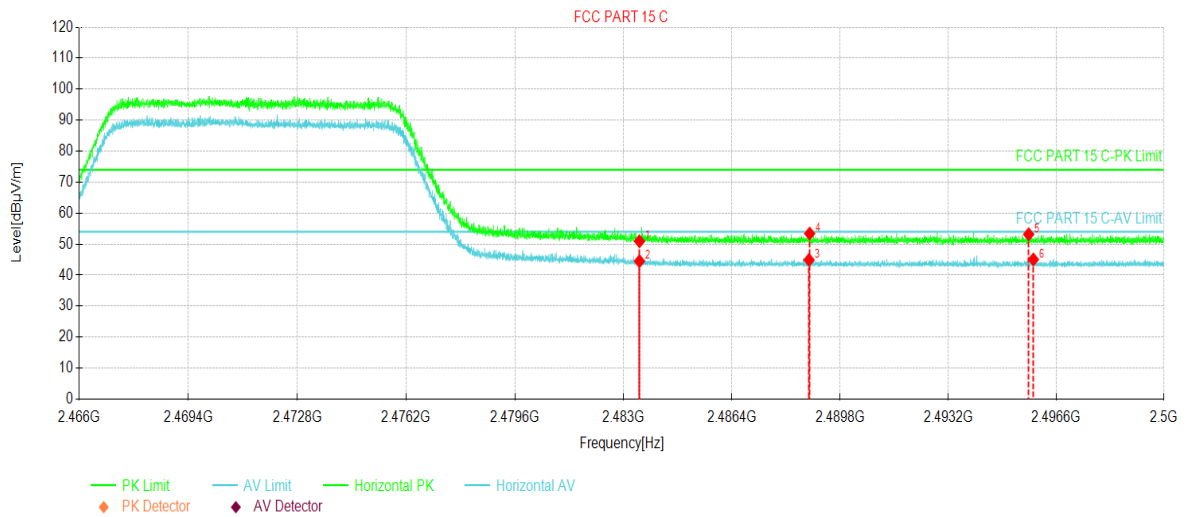


Suspected Data List								
NO.	Freq. [MHz]	Reading [dBµV/m]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Trace	Polarity
1	2483.50	43.25	50.94	7.69	74.00	23.06	PK	Horizontal
2	2483.50	36.83	44.52	7.69	54.00	9.48	AV	Horizontal
3	2488.82	37.20	44.92	7.72	54.00	9.08	AV	Horizontal
4	2488.84	45.68	53.40	7.72	74.00	20.60	PK	Horizontal
5	2495.73	45.40	53.17	7.77	74.00	20.83	PK	Horizontal
6	2495.88	37.29	45.06	7.77	54.00	8.94	AV	Horizontal

**Remark:**

- Final Level = Receiver Read level + Factor(Antenna Factor + Cable Loss – Preamplifier Factor).
- The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

<b>Product Name:</b>	DragonFish Ground Control Station	<b>Product Model:</b>	DFRC-2
<b>Test By:</b>	Mike	<b>Test mode:</b>	2.4GHz-QPSK Tx mode
<b>Test Channel:</b>	Highest channel	<b>Polarization:</b>	Vertical
<b>Test Voltage:</b>	DC 11.4V	<b>Environment:</b>	Temp: 24°C Huni: 57%

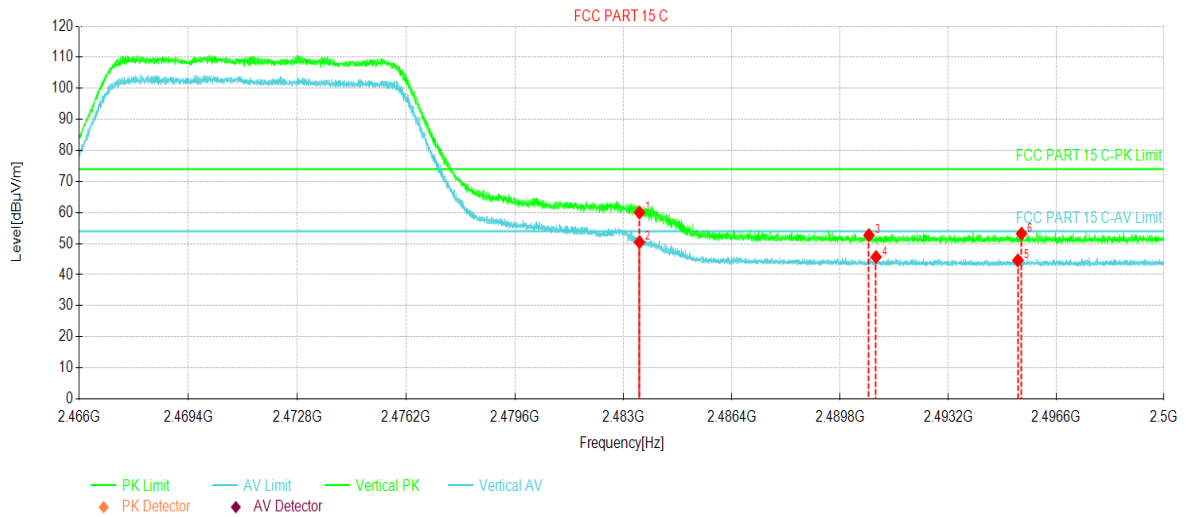


Suspected Data List								
NO.	Freq. [MHz]	Reading [dBµV/m]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Trace	Polarity
1	2483.50	52.28	59.97	7.69	74.00	14.03	PK	Vertical
2	2483.50	42.80	50.49	7.69	54.00	3.51	AV	Vertical
3	2490.70	45.00	52.74	7.74	74.00	21.26	PK	Vertical
4	2490.93	37.94	45.68	7.74	54.00	8.32	AV	Vertical
5	2495.39	36.84	44.61	7.77	54.00	9.39	AV	Vertical
6	2495.50	45.45	53.22	7.77	74.00	20.78	PK	Vertical

**Remark:**

- Final Level = Receiver Read level + Factor(Antenna Factor + Cable Loss – Preamplifier Factor).
- The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

<b>Product Name:</b>	DragonFish Ground Control Station	<b>Product Model:</b>	DFRC-2
<b>Test By:</b>	Mike	<b>Test mode:</b>	2.4GHz-16QAM Tx mode
<b>Test Channel:</b>	Lowest channel	<b>Polarization:</b>	Horizontal
<b>Test Voltage:</b>	DC 11.4V	<b>Environment:</b>	Temp: 24°C Huni: 57%

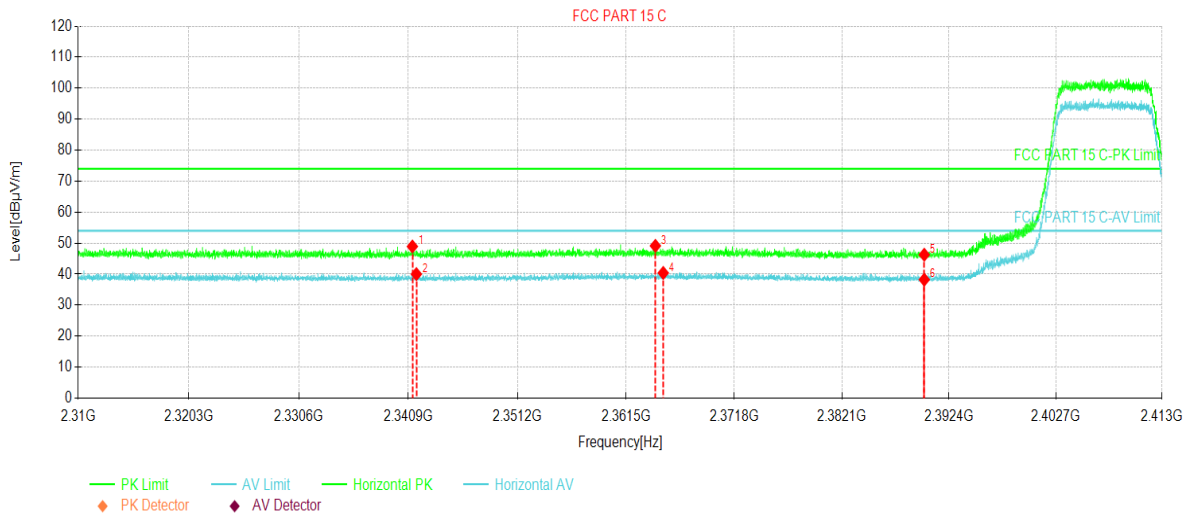


Suspected Data List								
NO.	Freq. [MHz]	Reading [dBuV/m]	Level [dBuV/m]	Factor [dB]	Limit [dBuV/m]	Margin [dB]	Trace	Polarity
1	2341.28	42.01	48.93	6.92	74.00	25.07	PK	Horizontal
2	2341.65	33.09	40.01	6.92	54.00	13.99	AV	Horizontal
3	2364.29	42.15	49.14	6.99	74.00	24.86	PK	Horizontal
4	2365.04	33.40	40.39	6.99	54.00	13.61	AV	Horizontal
5	2390.01	39.18	46.26	7.08	74.00	27.74	PK	Horizontal
6	2390.01	31.14	38.22	7.08	54.00	15.78	AV	Horizontal

**Remark:**

- Final Level = Receiver Read level + Factor(Antenna Factor + Cable Loss – Preamplifier Factor).
- The emission levels of other frequencies are lower than the limit 20dB and not show in test report.



<b>Product Name:</b>	DragonFish Ground Control Station	<b>Product Model:</b>	DFRC-2
<b>Test By:</b>	Mike	<b>Test mode:</b>	2.4GHz-16QAM Tx mode
<b>Test Channel:</b>	Lowest channel	<b>Polarization:</b>	Vertical
<b>Test Voltage:</b>	DC 11.4V	<b>Environment:</b>	Temp: 24°C Huni: 57%

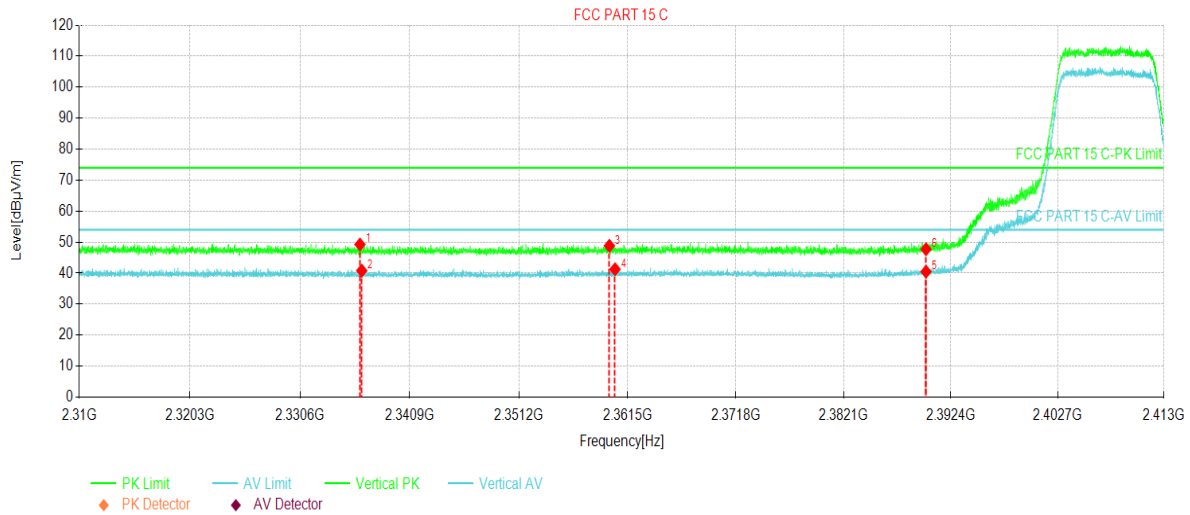


Suspected Data List								
NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Trace	Polarity
1	2336.22	42.35	49.25	6.90	74.00	24.75	PK	Vertical
2	2336.39	33.90	40.80	6.90	54.00	13.20	AV	Vertical
3	2359.77	41.84	48.82	6.98	74.00	25.18	PK	Vertical
4	2360.31	34.28	41.26	6.98	54.00	12.74	AV	Vertical
5	2390.01	33.41	40.49	7.08	54.00	13.51	AV	Vertical
6	2390.01	40.64	47.72	7.08	74.00	26.28	PK	Vertical

**Remark:**

- Final Level = Receiver Read level + Factor(Antenna Factor + Cable Loss – Preamplifier Factor).
- The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

<b>Product Name:</b>	DragonFish Ground Control Station	<b>Product Model:</b>	DFRC-2
<b>Test By:</b>	Mike	<b>Test mode:</b>	2.4GHz-16QAM Tx mode
<b>Test Channel:</b>	Highest channel	<b>Polarization:</b>	Horizontal
<b>Test Voltage:</b>	DC 11.4V	<b>Environment:</b>	Temp: 24°C Humi: 57%

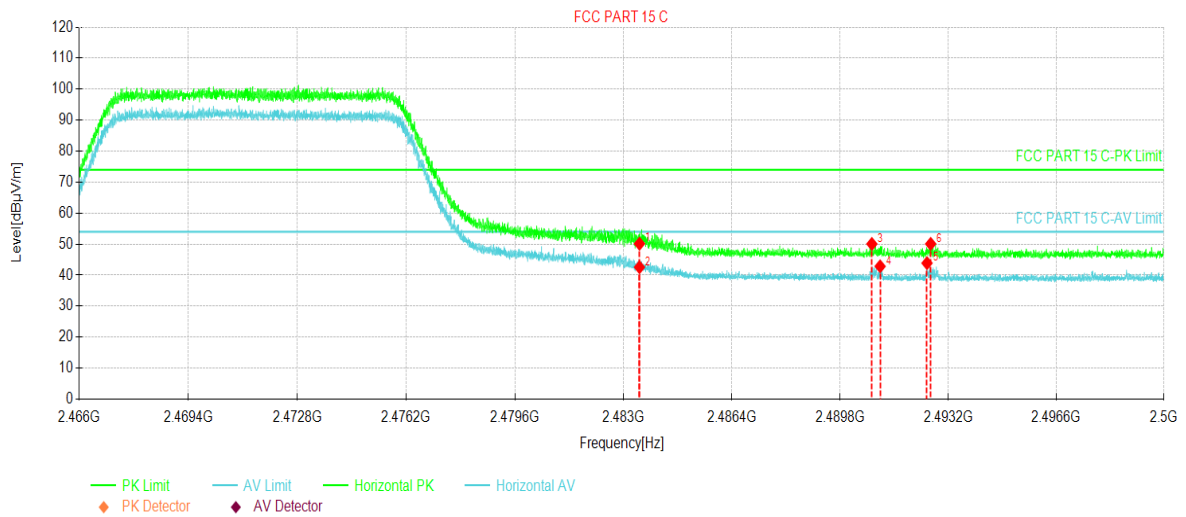


Suspected Data List								
NO.	Freq. [MHz]	Reading [dBµV/m]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Trace	Polarity
1	2483.50	42.45	50.14	7.69	74.00	23.86	PK	Horizontal
2	2483.50	34.88	42.57	7.69	54.00	11.43	AV	Horizontal
3	2490.79	42.32	50.06	7.74	74.00	23.94	PK	Horizontal
4	2491.05	35.11	42.85	7.74	54.00	11.15	AV	Horizontal
5	2492.53	36.12	43.87	7.75	54.00	10.13	AV	Horizontal
6	2492.64	42.34	50.09	7.75	74.00	23.91	PK	Horizontal

**Remark:**

- Final Level = Receiver Read level + Factor(Antenna Factor + Cable Loss – Preamplifier Factor).
- The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

<b>Product Name:</b>	DragonFish Ground Control Station	<b>Product Model:</b>	DFRC-2
<b>Test By:</b>	Mike	<b>Test mode:</b>	2.4GHz-16QAM Tx mode
<b>Test Channel:</b>	Highest channel	<b>Polarization:</b>	Vertical
<b>Test Voltage:</b>	DC 11.4V	<b>Environment:</b>	Temp: 24°C Huni: 57%

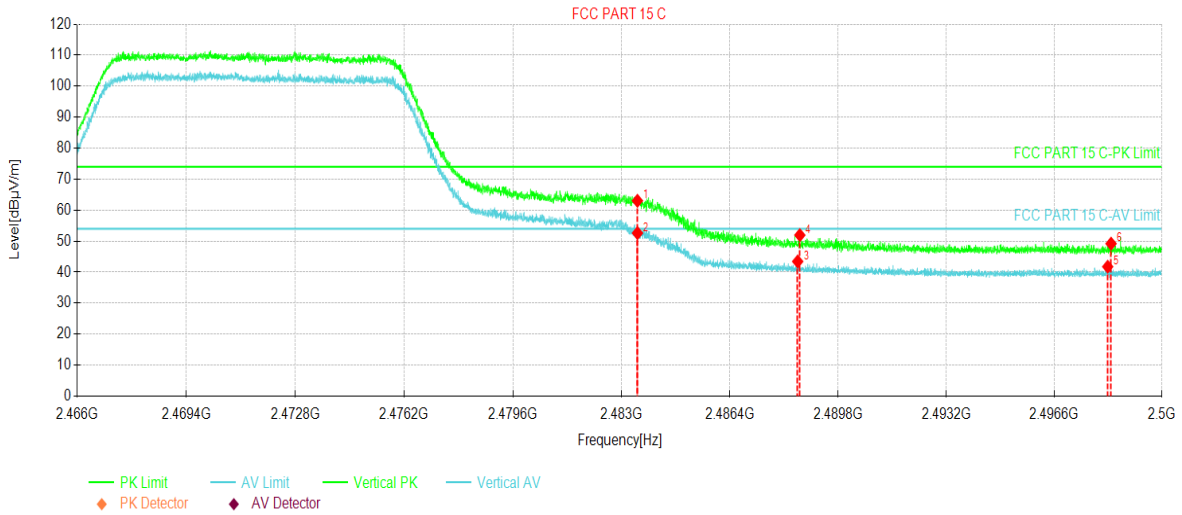


Suspected Data List								
NO.	Freq. [MHz]	Reading [dBµV/m]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Trace	Polarity
1	2483.50	55.33	63.02	7.69	74.00	10.98	PK	Vertical
2	2483.50	44.91	52.60	7.69	54.00	1.40	AV	Vertical
3	2488.52	35.73	43.45	7.72	54.00	10.55	AV	Vertical
4	2488.59	44.23	51.95	7.72	74.00	22.05	PK	Vertical
5	2498.28	33.97	41.76	7.79	54.00	12.24	AV	Vertical
6	2498.39	41.41	49.20	7.79	74.00	24.80	PK	Vertical

**Remark:**

- Final Level = Receiver Read level + Factor(Antenna Factor + Cable Loss – Pre-amplifier Factor).
- The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

**BW: 20MHz**

<b>Product Name:</b>	DragonFish Ground Control Station	<b>Product Model:</b>	DFRC-2
<b>Test By:</b>	Mike	<b>Test mode:</b>	900MHz-QPSK Tx mode
<b>Test Channel:</b>	Lowest channel	<b>Polarization:</b>	Horizontal
<b>Test Voltage:</b>	DC 11.4V	<b>Environment:</b>	Temp: 24°C Humi: 57%

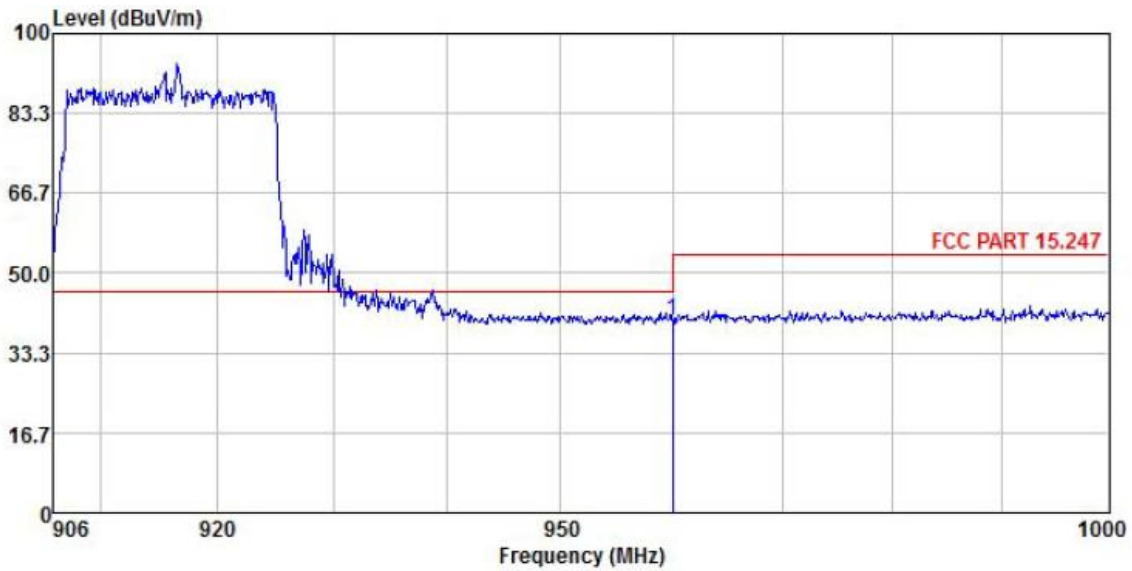


	Read	Antenna	Cable	Preamp	Level	Limit	Over	
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1 960.000	13.87	22.86	3.51	0.00	40.24	46.00	-5.76	

**Remark:**

1. Final Level = Receiver Read level + Factor(Antenna Factor + Cable Loss – Pre-amplifier Factor).
2. The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

<b>Product Name:</b>	DragonFish Ground Control Station	<b>Product Model:</b>	DFRC-2
<b>Test By:</b>	Mike	<b>Test mode:</b>	900MHz-QPSK Tx mode
<b>Test Channel:</b>	Lowest channel	<b>Polarization:</b>	Vertical
<b>Test Voltage:</b>	DC 11.4V	<b>Environment:</b>	Temp: 24°C Humi: 57%

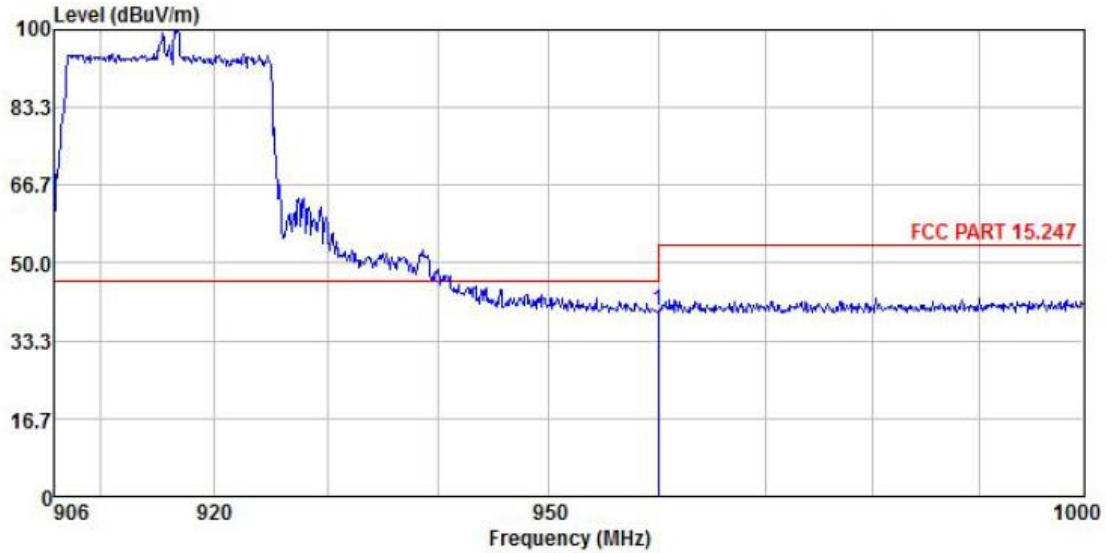


	Read Freq	Antenna Level	Antenna Factor	Cable Loss	Preamp Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	960.050	13.58	22.86	3.51	0.00	39.95	54.00	-14.05	

**Remark:**

- Final Level = Receiver Read level + Factor(Antenna Factor + Cable Loss – Preamplifier Factor).
- The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

<b>Product Name:</b>	DragonFish Ground Control Station	<b>Product Model:</b>	DFRC-2
<b>Test By:</b>	Mike	<b>Test mode:</b>	900MHz-QPSK Tx mode
<b>Test Channel:</b>	Highest channel	<b>Polarization:</b>	Horizontal
<b>Test Voltage:</b>	DC 11.4V	<b>Environment:</b>	Temp: 24°C Huni: 57%

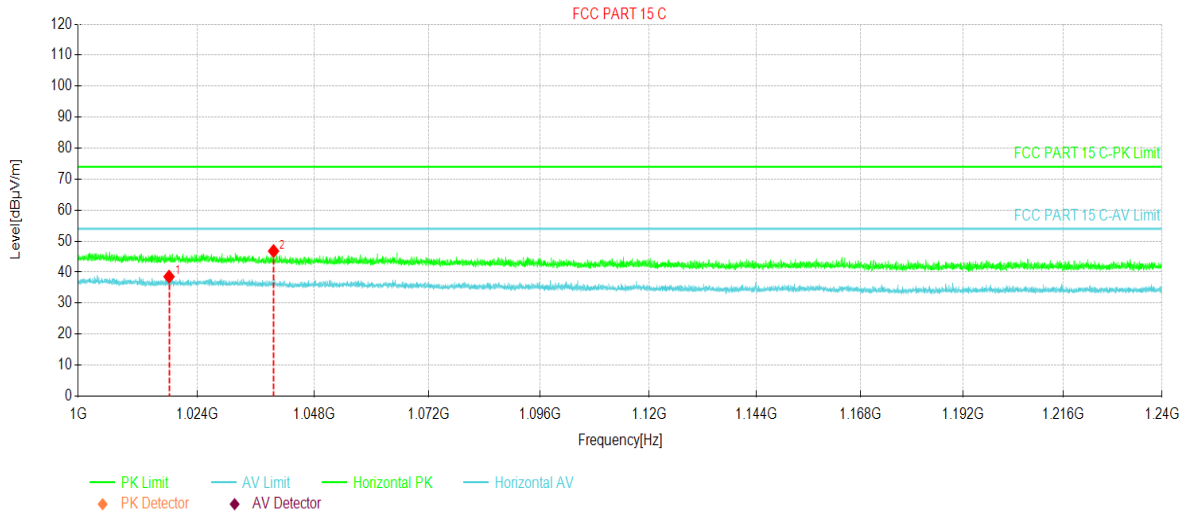


Suspected Data List								
NO.	Freq. [MHz]	Reading [dBµV/m]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Trace	Polarity
1	1018.21	35.69	38.54	2.85	54.00	15.46	AV	Horizontal
2	1039.54	44.28	46.79	2.51	74.00	27.21	PK	Horizontal

**Remark:**

- Final Level = Receiver Read level + Factor(Antenna Factor + Cable Loss – Preamplifier Factor).
- The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

<b>Product Name:</b>	DragonFish Ground Control Station	<b>Product Model:</b>	DFRC-2
<b>Test By:</b>	Mike	<b>Test mode:</b>	900MHz-QPSK Tx mode
<b>Test Channel:</b>	Highest channel	<b>Polarization:</b>	Vertical
<b>Test Voltage:</b>	DC 11.4V	<b>Environment:</b>	Temp: 24°C Huni: 57%

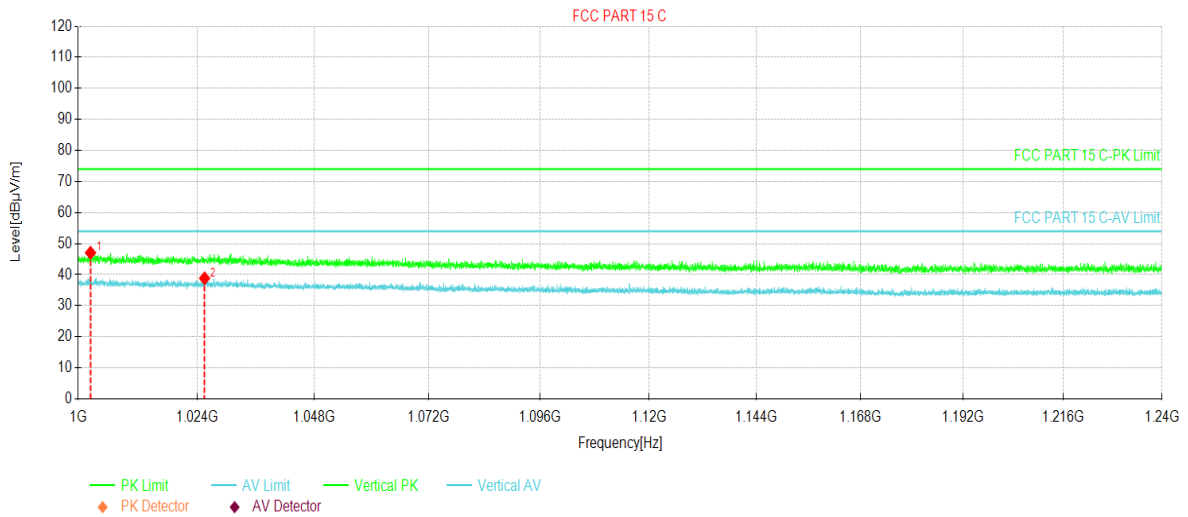


Suspected Data List								
NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Trace	Polarity
1	1002.46	43.95	47.05	3.10	74.00	26.95	PK	Vertical
2	1025.41	36.07	38.81	2.74	54.00	15.19	AV	Vertical

**Remark:**

- Final Level = Receiver Read level + Factor(Antenna Factor + Cable Loss – Pre-amplifier Factor).
- The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

<b>Product Name:</b>	DragonFish Ground Control Station	<b>Product Model:</b>	DFRC-2
<b>Test By:</b>	Mike	<b>Test mode:</b>	900MHz-16QAM Tx mode
<b>Test Channel:</b>	Lowest channel	<b>Polarization:</b>	Horizontal
<b>Test Voltage:</b>	DC 11.4V	<b>Environment:</b>	Temp: 24°C Humi: 57%

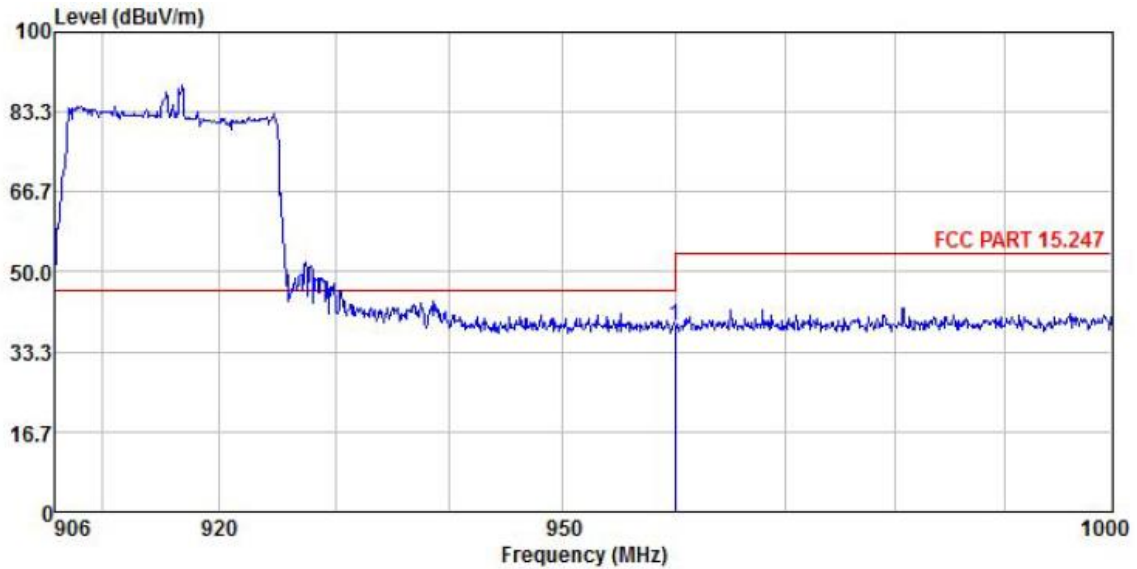


	ReadAntenna	Cable Preamp	Limit	Over				
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	960.050	12.56	22.86	3.51	0.00	38.93	54.00	-15.07

**Remark:**

1. Final Level = Receiver Read level + Factor(Antenna Factor + Cable Loss – Preamplifier Factor).
2. The emission levels of other frequencies are lower than the limit 20dB and not show in test report.



<b>Product Name:</b>	DragonFish Ground Control Station	<b>Product Model:</b>	DFRC-2
<b>Test By:</b>	Mike	<b>Test mode:</b>	900MHz-16QAM Tx mode
<b>Test Channel:</b>	Lowest channel	<b>Polarization:</b>	Vertical
<b>Test Voltage:</b>	DC 11.4V	<b>Environment:</b>	Temp: 24°C Humi: 57%

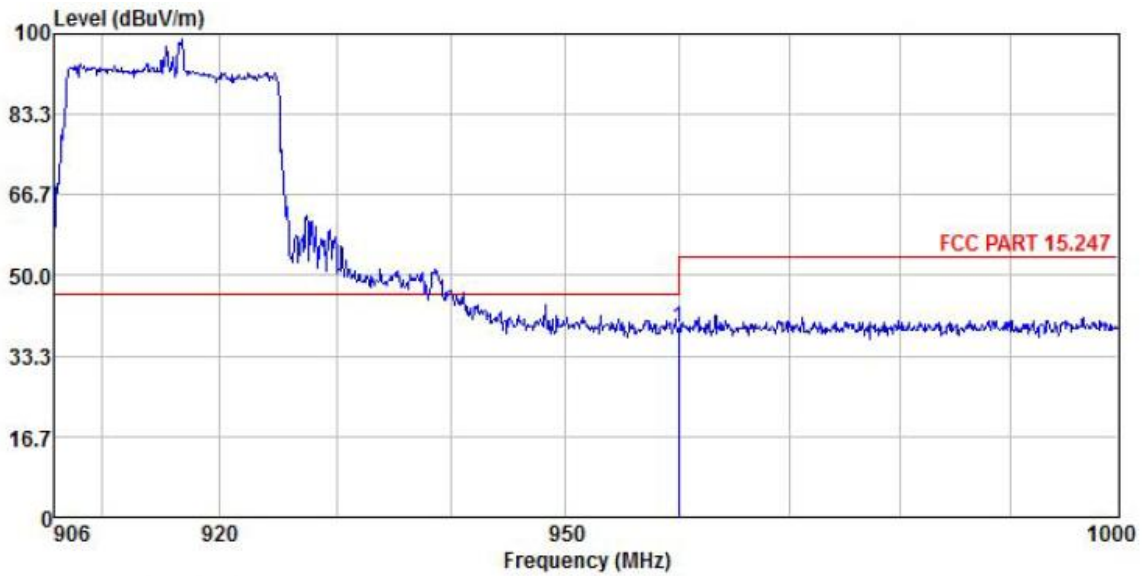


	Read Freq	Antenna Level	Factor	Cable Loss	Preamp Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	960.050	12.60	22.86	3.51	0.00	38.97	54.00	-15.03	

**Remark:**

1. Final Level = Receiver Read level + Factor(Antenna Factor + Cable Loss – Preamplifier Factor).
2. The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

<b>Product Name:</b>	DragonFish Ground Control Station	<b>Product Model:</b>	DFRC-2
<b>Test By:</b>	Mike	<b>Test mode:</b>	900MHz-16QAM Tx mode
<b>Test Channel:</b>	Highest channel	<b>Polarization:</b>	Horizontal
<b>Test Voltage:</b>	DC 11.4V	<b>Environment:</b>	Temp: 24°C Huni: 57%

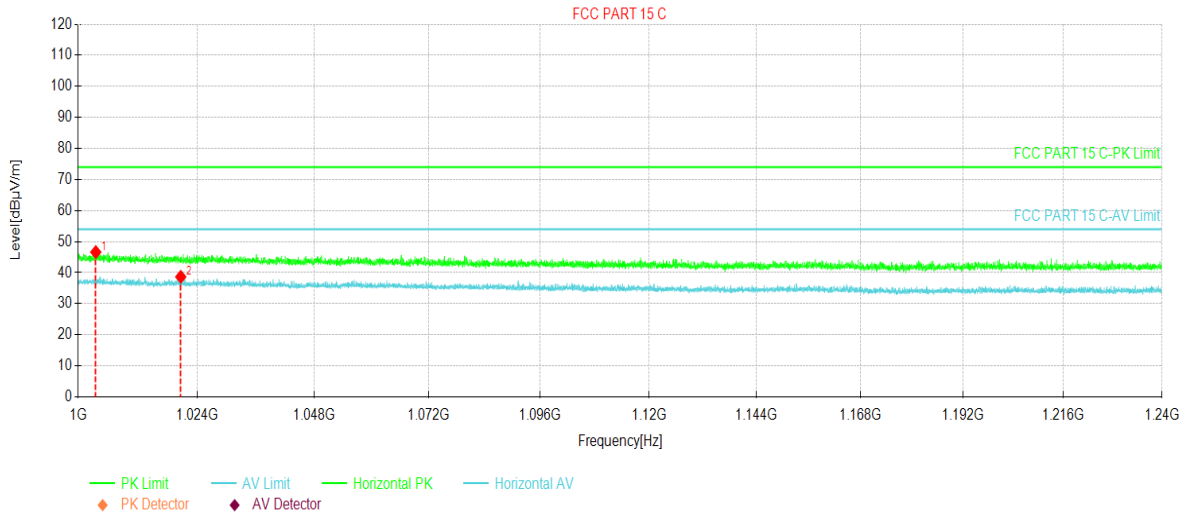


Suspected Data List								
NO.	Freq. [MHz]	Reading [dBµV/m]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Trace	Polarity
1	1003.51	43.54	46.62	3.08	74.00	27.38	PK	Horizontal
2	1020.58	35.85	38.66	2.81	54.00	15.34	AV	Horizontal

**Remark:**

- Final Level = Receiver Read level + Factor(Antenna Factor + Cable Loss – Preamplifier Factor).
- The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

<b>Product Name:</b>	DragonFish Ground Control Station	<b>Product Model:</b>	DFRC-2
<b>Test By:</b>	Mike	<b>Test mode:</b>	900MHz-16QAM Tx mode
<b>Test Channel:</b>	Highest channel	<b>Polarization:</b>	Vertical
<b>Test Voltage:</b>	DC 11.4V	<b>Environment:</b>	Temp: 24°C Huni: 57%

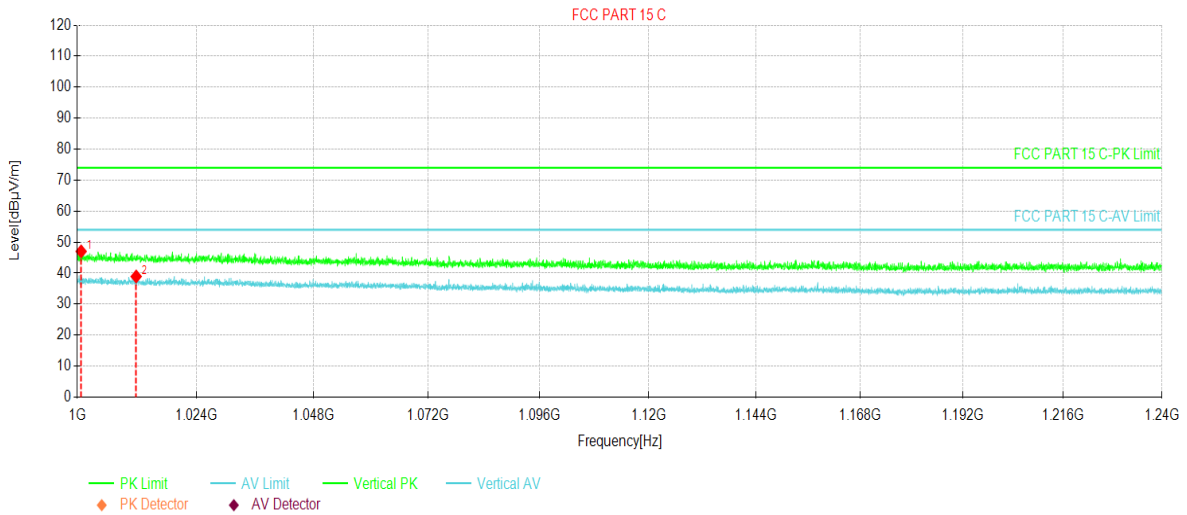


Suspected Data List								
NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Trace	Polarity
1	1000.78	43.88	47.01	3.13	74.00	26.99	PK	Vertical
2	1011.76	35.98	38.93	2.95	54.00	15.07	AV	Vertical

**Remark:**

- Final Level = Receiver Read level + Factor(Antenna Factor + Cable Loss – Preamplifier Factor).
- The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

<b>Product Name:</b>	DragonFish Ground Control Station	<b>Product Model:</b>	DFRC-2
<b>Test By:</b>	Mike	<b>Test mode:</b>	2.4GHz-QPSK Tx mode
<b>Test Channel:</b>	Lowest channel	<b>Polarization:</b>	Horizontal
<b>Test Voltage:</b>	DC 11.4V	<b>Environment:</b>	Temp: 24°C Huni: 57%

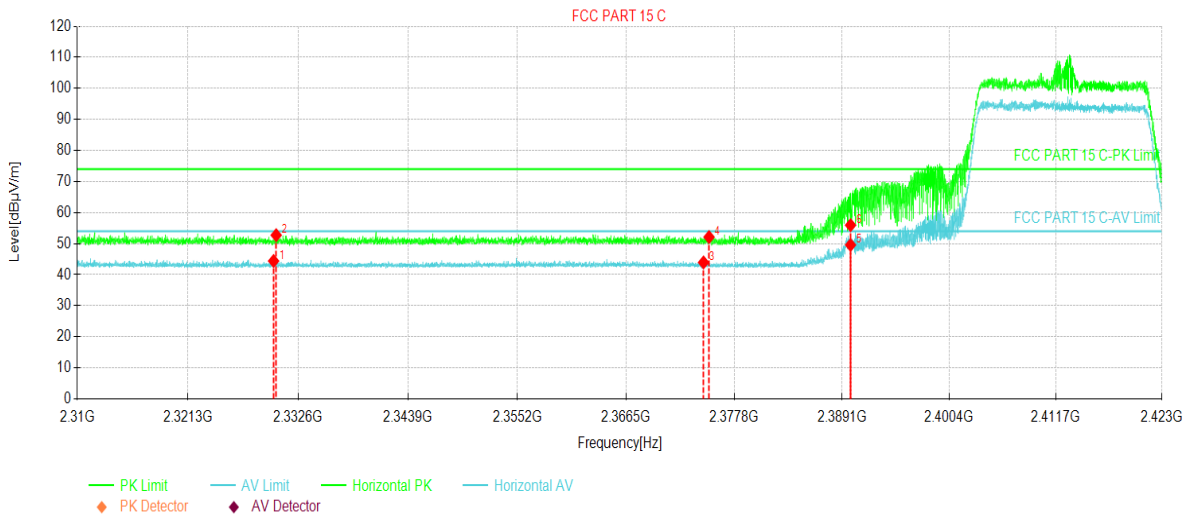


Suspected Data List								
NO.	Freq. [MHz]	Reading [dBµV/m]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Trace	Polarity
1	2330.05	37.52	44.40	6.88	54.00	9.60	AV	Horizontal
2	2330.32	45.84	52.72	6.88	74.00	21.28	PK	Horizontal
3	2374.57	36.91	43.94	7.03	54.00	10.06	AV	Horizontal
4	2375.15	45.09	52.12	7.03	74.00	21.88	PK	Horizontal
5	2390.00	42.49	49.57	7.08	54.00	4.43	AV	Horizontal
6	2390.00	48.85	55.93	7.08	74.00	18.07	PK	Horizontal

**Remark:**

- Final Level = Receiver Read level + Factor(Antenna Factor + Cable Loss – Preamplifier Factor).
- The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

<b>Product Name:</b>	DragonFish Ground Control Station	<b>Product Model:</b>	DFRC-2
<b>Test By:</b>	Mike	<b>Test mode:</b>	2.4GHz-QPSK Tx mode
<b>Test Channel:</b>	Lowest channel	<b>Polarization:</b>	Vertical
<b>Test Voltage:</b>	DC 11.4V	<b>Environment:</b>	Temp: 24°C      Humi: 57%

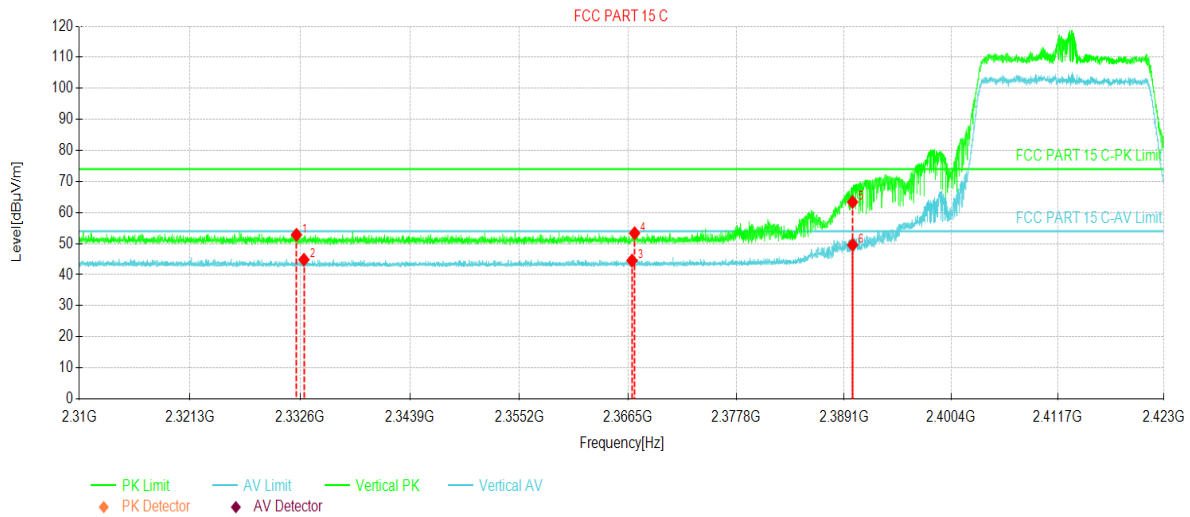


Suspected Data List								
NO.	Freq. [MHz]	Reading [dBµV/m]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Trace	Polarity
1	2332.20	45.95	52.84	6.89	74.00	21.16	PK	Vertical
2	2332.96	37.92	44.81	6.89	54.00	9.19	AV	Vertical
3	2366.90	37.53	44.53	7.00	54.00	9.47	AV	Vertical
4	2367.17	46.36	53.36	7.00	74.00	20.64	PK	Vertical
5	2390.00	56.31	63.39	7.08	74.00	10.61	PK	Vertical
6	2390.00	42.53	49.61	7.08	54.00	4.39	AV	Vertical

**Remark:**

- Final Level = Receiver Read level + Factor(Antenna Factor + Cable Loss – Preamplifier Factor).
- The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

<b>Product Name:</b>	DragonFish Ground Control Station	<b>Product Model:</b>	DFRC-2
<b>Test By:</b>	Mike	<b>Test mode:</b>	2.4GHz-QPSK Tx mode
<b>Test Channel:</b>	Highest channel	<b>Polarization:</b>	Horizontal
<b>Test Voltage:</b>	DC 11.4V	<b>Environment:</b>	Temp: 24°C Huni: 57%

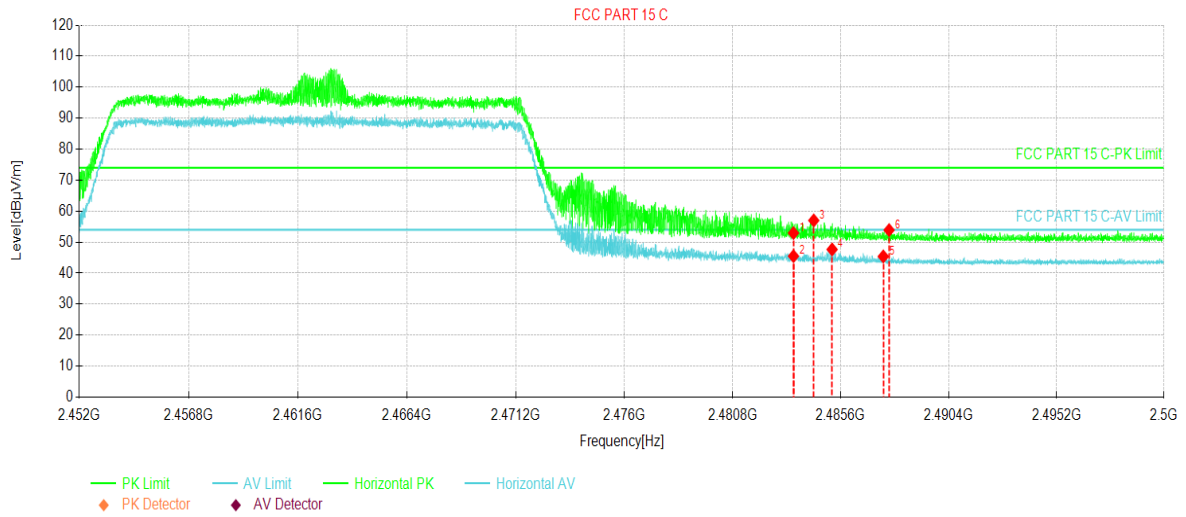


Suspected Data List								
NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Trace	Polarity
1	2483.50	45.25	52.94	7.69	74.00	21.06	PK	Horizontal
2	2483.50	37.79	45.48	7.69	54.00	8.52	AV	Horizontal
3	2484.40	49.31	57.00	7.69	74.00	17.00	PK	Horizontal
4	2485.21	39.95	47.65	7.70	54.00	6.35	AV	Horizontal
5	2487.49	37.68	45.39	7.71	54.00	8.61	AV	Horizontal
6	2487.74	46.17	53.89	7.72	74.00	20.11	PK	Horizontal

**Remark:**

- Final Level = Receiver Read level + Factor(Antenna Factor + Cable Loss – Preamplifier Factor).
- The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

<b>Product Name:</b>	DragonFish Ground Control Station	<b>Product Model:</b>	DFRC-2
<b>Test By:</b>	Mike	<b>Test mode:</b>	2.4GHz-QPSK Tx mode
<b>Test Channel:</b>	Highest channel	<b>Polarization:</b>	Vertical
<b>Test Voltage:</b>	DC 11.4V	<b>Environment:</b>	Temp: 24°C Huni: 57%

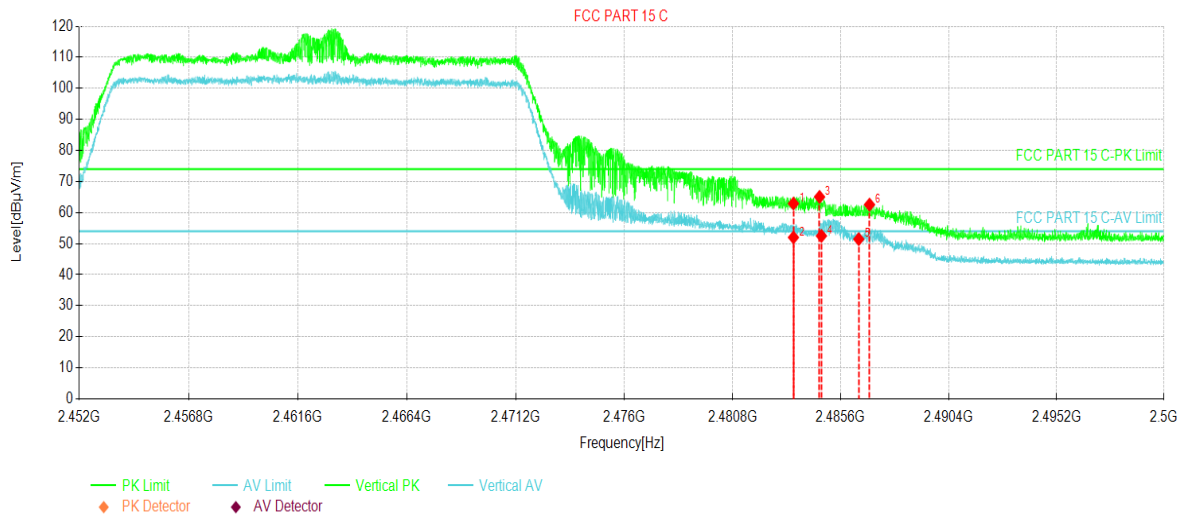


Suspected Data List								
NO.	Freq. [MHz]	Reading [dBµV/m]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Trace	Polarity
1	2483.50	55.22	62.91	7.69	74.00	11.09	PK	Vertical
2	2483.50	44.30	51.99	7.69	54.00	2.01	AV	Vertical
3	2484.65	57.36	65.05	7.69	74.00	8.95	PK	Vertical
4	2484.74	44.79	52.48	7.69	54.00	1.52	AV	Vertical
5	2486.39	43.74	51.45	7.71	54.00	2.55	AV	Vertical
6	2486.87	54.83	62.54	7.71	74.00	11.46	PK	Vertical

**Remark:**

- Final Level = Receiver Read level + Factor(Antenna Factor + Cable Loss – Preamplifier Factor).
- The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

<b>Product Name:</b>	DragonFish Ground Control Station	<b>Product Model:</b>	DFRC-2
<b>Test By:</b>	Mike	<b>Test mode:</b>	2.4GHz-16QAM Tx mode
<b>Test Channel:</b>	Lowest channel	<b>Polarization:</b>	Horizontal
<b>Test Voltage:</b>	DC 11.4V	<b>Environment:</b>	Temp: 24°C Huni: 57%

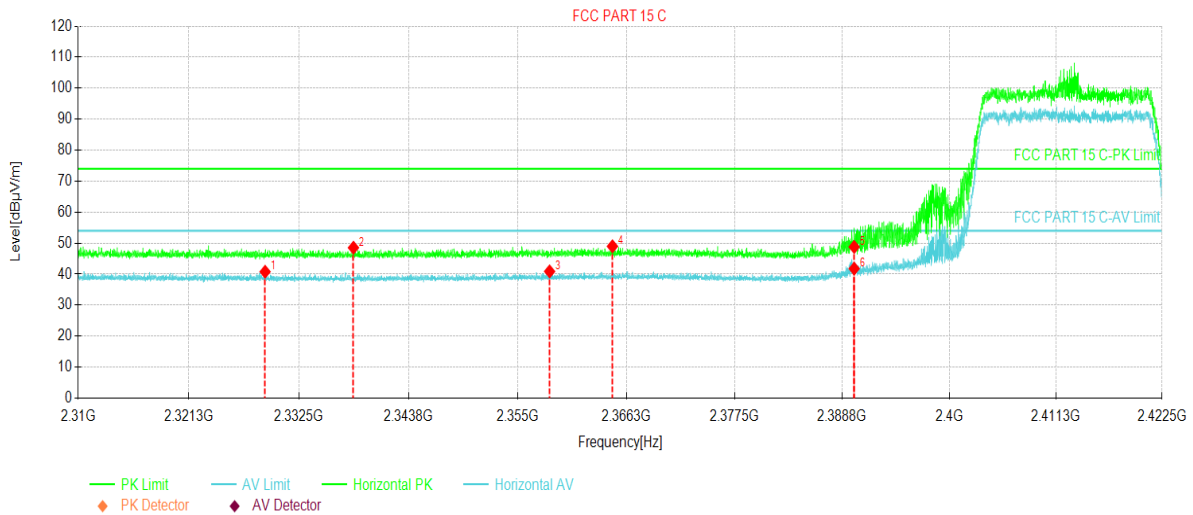


Suspected Data List								
NO.	Freq. [MHz]	Reading [dBuV/m]	Level [dBuV/m]	Factor [dB]	Limit [dBuV/m]	Margin [dB]	Trace	Polarity
1	2329.02	33.90	40.78	6.88	54.00	13.22	AV	Horizontal
2	2338.06	41.63	48.54	6.91	74.00	25.46	PK	Horizontal
3	2358.27	33.92	40.89	6.97	54.00	13.11	AV	Horizontal
4	2364.78	41.98	48.97	6.99	74.00	25.03	PK	Horizontal
5	2390.00	41.69	48.77	7.08	74.00	25.23	PK	Horizontal
6	2390.00	34.70	41.78	7.08	54.00	12.22	AV	Horizontal

**Remark:**

- Final Level = Receiver Read level + Factor(Antenna Factor + Cable Loss – Preamplifier Factor).
- The emission levels of other frequencies are lower than the limit 20dB and not show in test report.



<b>Product Name:</b>	DragonFish Ground Control Station	<b>Product Model:</b>	DFRC-2
<b>Test By:</b>	Mike	<b>Test mode:</b>	2.4GHz-16QAM Tx mode
<b>Test Channel:</b>	Lowest channel	<b>Polarization:</b>	Vertical
<b>Test Voltage:</b>	DC 11.4V	<b>Environment:</b>	Temp: 24°C Humi: 57%

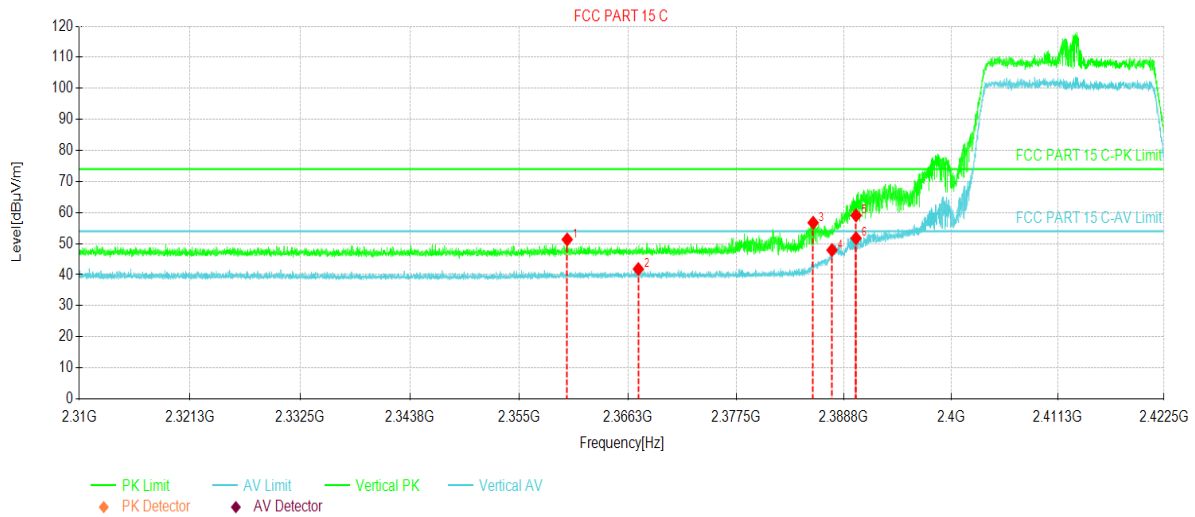


Suspected Data List								
NO.	Freq. [MHz]	Reading [dBuV/m]	Level [dBuV/m]	Factor [dB]	Limit [dBuV/m]	Margin [dB]	Trace	Polarity
1	2359.95	44.35	51.33	6.98	74.00	22.67	PK	Vertical
2	2367.31	34.81	41.81	7.00	54.00	12.19	AV	Vertical
3	2385.52	49.66	56.72	7.06	74.00	17.28	PK	Vertical
4	2387.49	40.86	47.93	7.07	54.00	6.07	AV	Vertical
5	2390.01	52.00	59.08	7.08	74.00	14.92	PK	Vertical
6	2390.01	44.66	51.74	7.08	54.00	2.26	AV	Vertical

**Remark:**

- Final Level = Receiver Read level + Factor(Antenna Factor + Cable Loss – Preamplifier Factor).
- The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

<b>Product Name:</b>	DragonFish Ground Control Station	<b>Product Model:</b>	DFRC-2
<b>Test By:</b>	Mike	<b>Test mode:</b>	2.4GHz-16QAM Tx mode
<b>Test Channel:</b>	Highest channel	<b>Polarization:</b>	Horizontal
<b>Test Voltage:</b>	DC 11.4V	<b>Environment:</b>	Temp: 24°C Huni: 57%

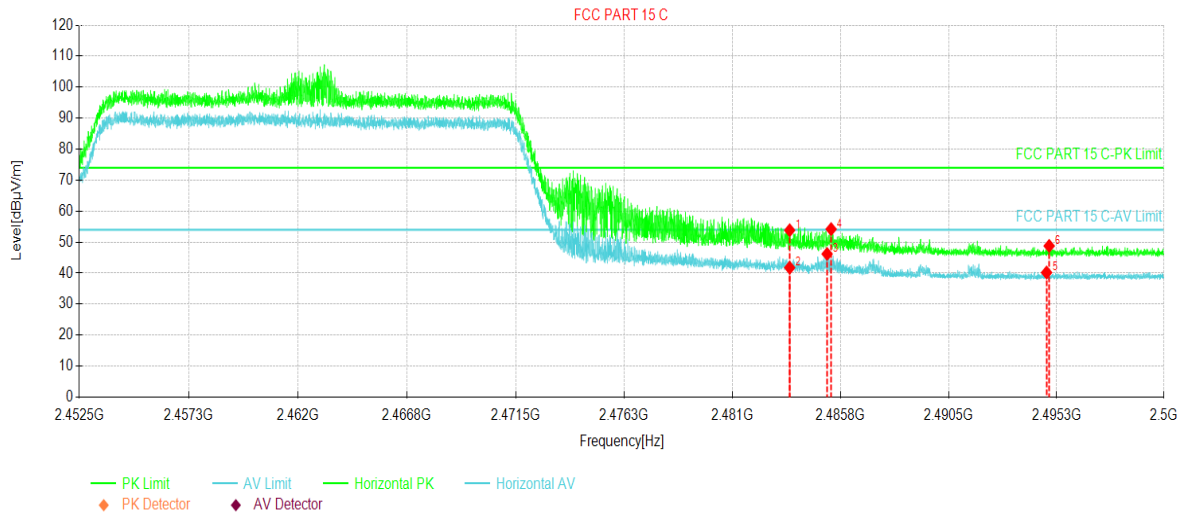


Suspected Data List								
NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Trace	Polarity
1	2483.50	46.14	53.83	7.69	74.00	20.17	PK	Horizontal
2	2483.50	34.07	41.76	7.69	54.00	12.24	AV	Horizontal
3	2485.15	38.49	46.19	7.70	54.00	7.81	AV	Horizontal
4	2485.32	46.49	54.19	7.70	74.00	19.81	PK	Horizontal
5	2494.81	32.43	40.19	7.76	54.00	13.81	AV	Horizontal
6	2494.92	41.01	48.78	7.77	74.00	25.22	PK	Horizontal

**Remark:**

- Final Level = Receiver Read level + Factor(Antenna Factor + Cable Loss – Preamplifier Factor).
- The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

<b>Product Name:</b>	DragonFish Ground Control Station	<b>Product Model:</b>	DFRC-2
<b>Test By:</b>	Mike	<b>Test mode:</b>	2.4GHz-16QAM Tx mode
<b>Test Channel:</b>	Highest channel	<b>Polarization:</b>	Vertical
<b>Test Voltage:</b>	DC 11.4V	<b>Environment:</b>	Temp: 24°C Huni: 57%

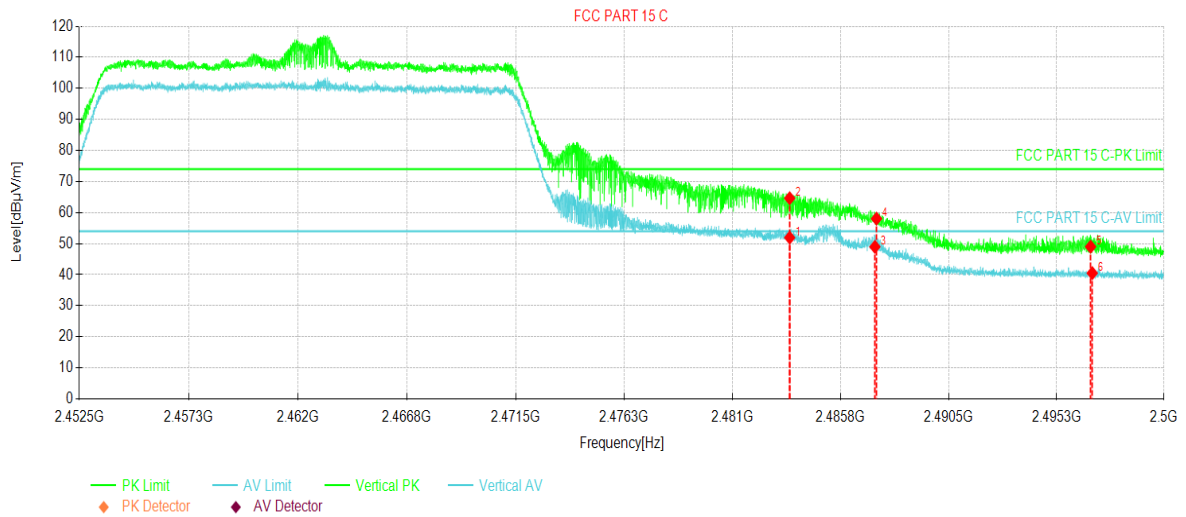

Suspected Data List								
NO.	Freq. [MHz]	Reading [dBµV/m]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Trace	Polarity
1	2483.50	44.23	51.92	7.69	54.00	2.08	AV	Vertical
2	2483.50	56.92	64.61	7.69	74.00	9.39	PK	Vertical
3	2487.25	41.25	48.96	7.71	54.00	5.04	AV	Vertical
4	2487.32	50.32	58.03	7.71	74.00	15.97	PK	Vertical
5	2496.75	41.21	48.99	7.78	74.00	25.01	PK	Vertical
6	2496.82	32.73	40.51	7.78	54.00	13.49	AV	Vertical

**Remark:**

- Final Level = Receiver Read level + Factor(Antenna Factor + Cable Loss – Preamplifier Factor).
- The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

## 6.7 Spurious Emission

### 6.7.1 Conducted Emission Method

Test Requirement:	FCC Part 15 C Section 15.247 (d)
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph(b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.
Test setup:	
Test Instruments:	Refer to section 5.8 for details
Test mode:	Refer to section 5.3 for details
Test results:	Passed
Measurement Data:	Refer to Appendix A – 900MHz, Appendix B – 2.4GHz,

### 6.7.2 Radiated Emission Method


Test Requirement:	FCC Part 15 C Section 15.209 and 15.205				
Test Frequency Range:	9kHz to 25GHz				
Test Distance:	3m				
Receiver setup:	Frequency	Detector	RBW	VBW	Remark
	30MHz-1GHz	Quasi-peak	120KHz	300KHz	Quasi-peak Value
	Above 1GHz	Peak	1MHz	3MHz	Peak Value
RMS		1MHz	3MHz	Average Value	
Limit:	Frequency	Limit (dBuV/m @3m)		Remark	
	30MHz-88MHz	40.0		Quasi-peak Value	
	88MHz-216MHz	43.5		Quasi-peak Value	
	216MHz-960MHz	46.0		Quasi-peak Value	
	960MHz-1GHz	54.0		Quasi-peak Value	
Above 1GHz	54.0		Average Value		
	74.0		Peak Value		
Test Procedure:	<ol style="list-style-type: none"> <li>The EUT was placed on the top of a rotating table 0.8m(below 1GHz)/1.5m(above 1GHz) above the ground at a 3 meter chamber. The table was rotated 360 degrees to determine the position of the highest radiation.</li> <li>The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.</li> <li>The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.</li> <li>For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.</li> <li>The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.</li> <li>If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.</li> </ol>				
Test setup:	<p>Below 1GHz</p> <p>Above 1GHz</p>				

Test Instruments:	Refer to section 5.9 for details
Test mode:	Refer to section 5.3 for details
Test results:	Passed
Remark:	<ol style="list-style-type: none"> <li>1. Pre-scan all kind of the place mode (X-axis, Y-axis, Z-axis), and found the Y-axis is the worst case.</li> <li>2. 9 kHz to 30MHz is lower than the limit 20dB, so only shows the data of above 30MHz in this report.</li> <li>3. Pre-scan all kind of Bandwidth and Modulation and found the 1.4MHz and QPSK is the worst case.</li> </ol>

Measurement Data (worst case):

Below 1GHz:

<b>Product Name:</b>	DragonFish Ground Control Station	<b>Product Model:</b>	DFRC-2
<b>Test By:</b>	Mike	<b>Test mode:</b>	900MHz Tx mode
<b>Test Frequency:</b>	30 MHz ~ 1 GHz	<b>Polarization:</b>	Horizontal
<b>Test Voltage:</b>	DC 11.4V	<b>Environment:</b>	Temp: 24°C Humi: 57%

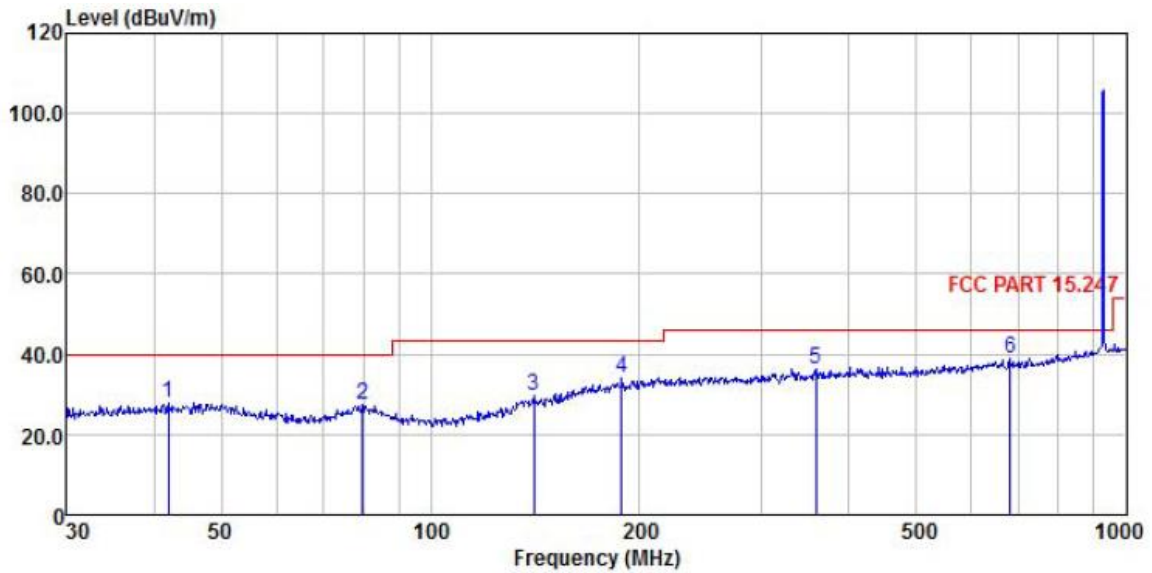


	Read Freq	Antenna Level	Factor	Cable Loss	Preamp Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	42.007	14.70	12.84	0.43	0.00	27.97	40.00	-12.03	
2	79.800	14.01	12.73	0.69	0.00	27.43	40.00	-12.57	
3	140.835	14.70	13.82	0.99	0.00	29.51	43.50	-13.99	
4	188.413	15.53	17.34	1.35	0.00	34.22	43.50	-9.28	
5	357.929	15.43	18.85	1.91	0.00	36.19	46.00	-9.81	
6	682.348	15.77	20.37	2.78	0.00	38.92	46.00	-7.08	

Remark:

1. Final Level = Receiver Read level + Factor(Antenna Factor + Cable Loss – Pre-amplifier Factor).
2. The emission levels of other frequencies are lower than the limit 20dB and not show in test report.



<b>Product Name:</b>	DragonFish Ground Control Station	<b>Product Model:</b>	DFRC-2
<b>Test By:</b>	Mike	<b>Test mode:</b>	900MHz Tx mode
<b>Test Frequency:</b>	30 MHz ~ 1 GHz	<b>Polarization:</b>	Vertical
<b>Test Voltage:</b>	DC 11.4V	<b>Environment:</b>	Temp: 24°C Humi: 57%

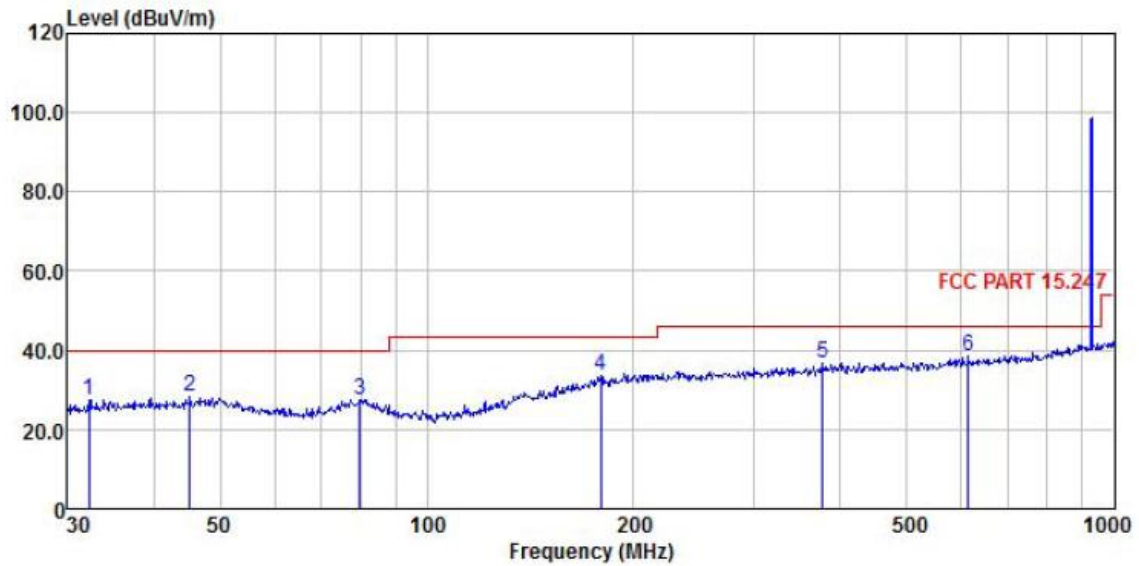


	Read	Antenna	Cable	Preamp	Limit	Over	
Freq	Level	Factor	Loss	Factor	Line	Limit	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1	32.179	15.09	12.16	0.37	0.00	27.62	40.00 -12.38
2	45.217	14.82	12.91	0.48	0.00	28.21	40.00 -11.79
3	79.800	14.23	12.73	0.69	0.00	27.65	40.00 -12.35
4	179.386	15.46	16.89	1.28	0.00	33.63	43.50 -9.87
5	377.259	15.61	18.97	1.97	0.00	36.55	46.00 -9.45
6	614.214	15.83	19.96	2.64	0.00	38.43	46.00 -7.57

Remark:

1. Final Level = Receiver Read level + Factor(Antenna Factor + Cable Loss – Preamplifier Factor).
2. The emission levels of other frequencies are lower than the limit 20dB and not show in test report.



<b>Product Name:</b>	DragonFish Ground Control Station	<b>Product Model:</b>	DFRC-2
<b>Test By:</b>	Mike	<b>Test mode:</b>	2.4GHz Tx mode
<b>Test Frequency:</b>	30 MHz ~ 1 GHz	<b>Polarization:</b>	Horizontal
<b>Test Voltage:</b>	DC 11.4V	<b>Environment:</b>	Temp: 24°C Huni: 57%

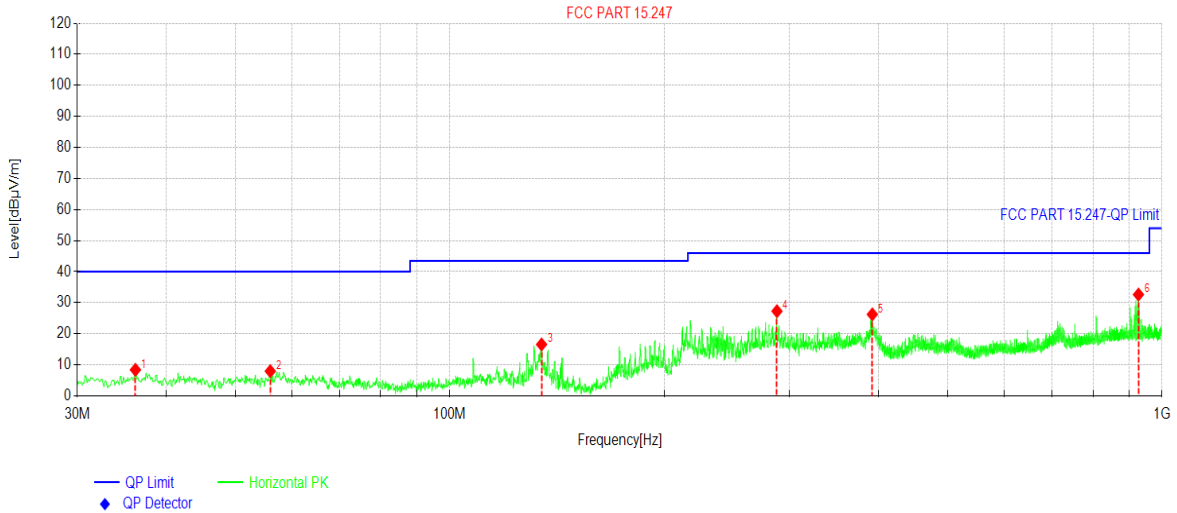


Suspected Data List								
NO.	Freq. [MHz]	Reading[dBµV/m]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Trace	Polarity
1	36.2086	25.59	8.39	-17.20	40.00	31.61	PK	Horizontal
2	55.9986	24.93	7.95	-16.98	40.00	32.05	PK	Horizontal
3	134.576	36.21	16.57	-19.64	43.50	26.93	PK	Horizontal
4	288.045	41.58	27.27	-14.31	46.00	18.73	PK	Horizontal
5	392.040	38.60	26.25	-12.35	46.00	19.75	PK	Horizontal
6	926.757	36.50	32.62	-3.88	46.00	13.38	PK	Horizontal

**Remark:**

1. Final Level = Receiver Read level + Factor(Antenna Factor + Cable Loss – Preamplifier Factor).
2. The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

<b>Product Name:</b>	DragonFish Ground Control Station	<b>Product Model:</b>	DFRC-2
<b>Test By:</b>	Mike	<b>Test mode:</b>	2.4GHz Tx mode
<b>Test Frequency:</b>	30 MHz ~ 1 GHz	<b>Polarization:</b>	Vertical
<b>Test Voltage:</b>	DC 11.4V	<b>Environment:</b>	Temp: 24°C Huni: 57%

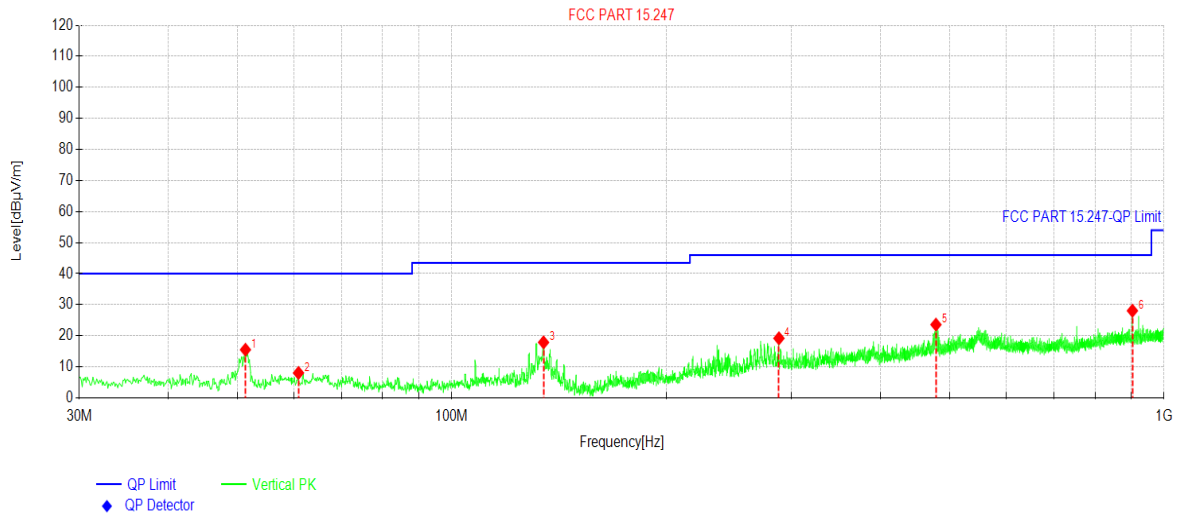

Suspected Data List								
NO.	Freq. [MHz]	Reading [dBµV/m]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Trace	Polarity
1	51.3421	32.58	15.51	-17.07	40.00	24.49	PK	Vertical
2	60.9461	25.36	8.03	-17.33	40.00	31.97	PK	Vertical
3	134.576	37.52	17.88	-19.64	43.50	25.62	PK	Vertical
4	288.045	33.49	19.18	-14.31	46.00	26.82	PK	Vertical
5	478.475	33.86	23.58	-10.28	46.00	22.42	PK	Vertical
6	902.990	31.98	28.06	-3.92	46.00	17.94	PK	Vertical

**Remark:**

- Final Level = Receiver Read level + Factor(Antenna Factor + Cable Loss – Preamplifier Factor).
- The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

**Above 1GHz**
**900MHz:**

BW:1.4MHz,QPSK						
Test channel: Lowest channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBuV)	Factor(dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Margin (dB)	Polarization
1808.00	56.38	-21.46	34.92	74.00	39.08	Vertical
1808.00	56.09	-21.46	34.63	74.00	39.37	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBuV)	Factor(dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Margin (dB)	Polarization
1808.00	48.68	-21.46	27.22	54.00	26.78	Vertical
1808.00	48.38	-21.46	26.92	54.00	27.08	Horizontal
Test channel: Middle channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBuV)	Factor(dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Margin (dB)	Polarization
1830.00	56.65	-21.25	35.40	74.00	38.60	Vertical
1830.00	56.52	-21.25	35.27	74.00	38.73	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBuV)	Factor(dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Margin (dB)	Polarization
1830.00	48.56	-21.25	27.31	54.00	26.69	Vertical
1830.00	49.06	-21.25	27.81	54.00	26.19	Horizontal
Test channel: Highest channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBuV)	Factor(dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Margin (dB)	Polarization
1852.00	56.34	-21.02	35.32	74.00	38.68	Vertical
1852.00	57.87	-21.02	36.85	74.00	37.15	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBuV)	Factor(dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Margin (dB)	Polarization
1852.00	49.37	-21.02	28.35	54.00	25.65	Vertical
1852.00	49.82	-21.02	28.80	54.00	25.20	Horizontal
<i>Remark:</i> 1. <i>Final Level = Receiver Read level + Factor.</i> 2. <i>The emission levels of other frequencies are lower than the limit 20dB and not show in test report.</i>						

**2.4GHz:**

BW:1.4MHz,QPSK						
Test channel: Lowest channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBuV)	Factor(dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Margin (dB)	Polarization
4807.00	59.29	-9.58	49.71	74.00	24.29	Vertical
4807.00	57.85	-9.58	48.27	74.00	25.73	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBuV)	Factor(dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Margin (dB)	Polarization
4807.00	52.52	-9.58	42.94	54.00	11.06	Vertical
4807.00	50.21	-9.58	40.63	54.00	13.37	Horizontal
Test channel: Middle channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBuV)	Factor(dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Margin (dB)	Polarization
4879.00	59.52	-9.08	50.44	74.00	23.56	Vertical
4879.00	58.29	-9.08	49.21	74.00	24.79	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBuV)	Factor(dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Margin (dB)	Polarization
4879.00	52.45	-9.08	43.37	54.00	10.63	Vertical
4879.00	50.03	-9.08	40.95	54.00	13.05	Horizontal
Test channel: Highest channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBuV)	Factor(dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Margin (dB)	Polarization
4951.00	59.52	-8.53	50.99	74.00	23.01	Vertical
4951.00	57.87	-8.53	49.34	74.00	24.66	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBuV)	Factor(dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Margin (dB)	Polarization
4951.00	52.81	-8.53	44.28	54.00	9.72	Vertical
4951.00	49.82	-8.53	41.29	54.00	12.71	Horizontal
<i>Remark:</i> 1. <i>Final Level = Receiver Read level + Factor.</i> 2. <i>The emission levels of other frequencies are lower than the limit 20dB and not show in test report.</i>						