




Test Data

Maximum Conducted Output Power

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Limit (dBm)	Verdict
NVNT	BLE	2402	Ant1	4.673	30	Pass
NVNT	BLE	2442	Ant1	3.965	30	Pass
NVNT	BLE	2480	Ant1	6.131	30	Pass



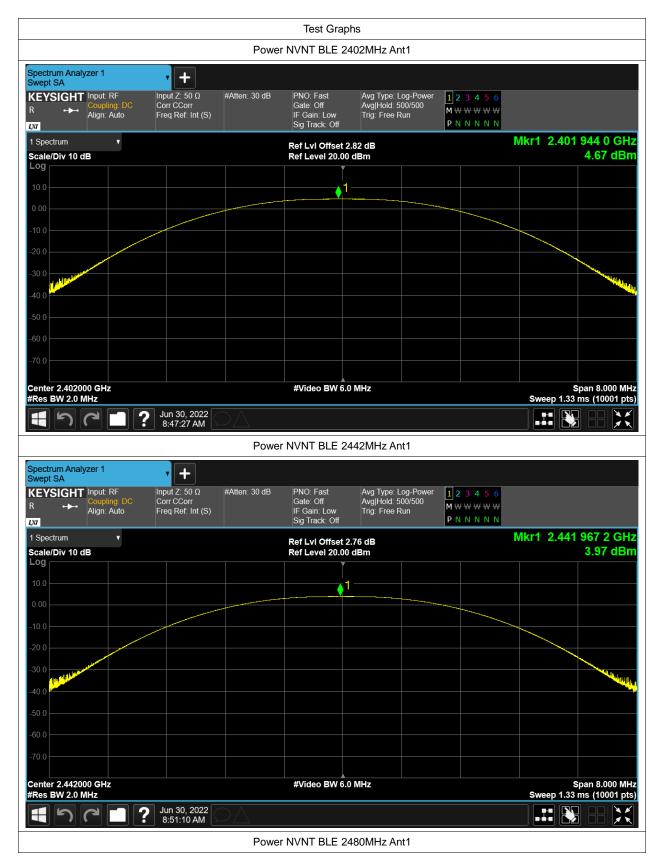










-6dB Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	-6 dB Bandwidth (MHz)	limit	Verdic
NVNT	BLE	2402	Ant1	0.662	0.5	Pass
NVNT	BLE	2442	Ant1	0.662	0.5	Pass
NVNT	BLE	2480	Ant1	0.659	0.5	Pass







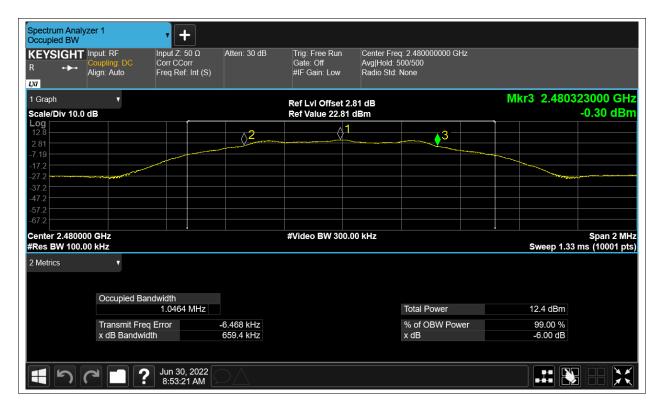






Occupied Channel Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)	
NVNT	BLE	2402	Ant1	1.032156011	
NVNT	BLE	2442	Ant1	1.035305522	
NVNT	BLE	2480	Ant1	1.036556063	







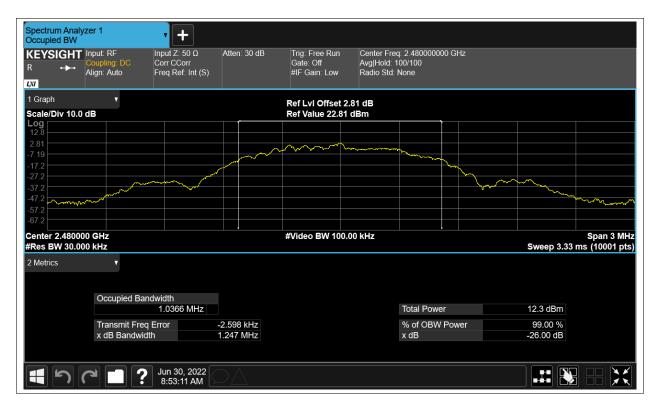







Maximum Power Spectral Density Level

Condition	Mode	Frequency (MHz)	Antenna	Max PSD (dBm)	Limit (dBm)	Verdict
NVNT	BLE	2402	Ant1	-10.048	8	Pass
NVNT	BLE	2442	Ant1	-10.958	8	Pass
NVNT	BLE	2480	Ant1	-8.715	8	Pass



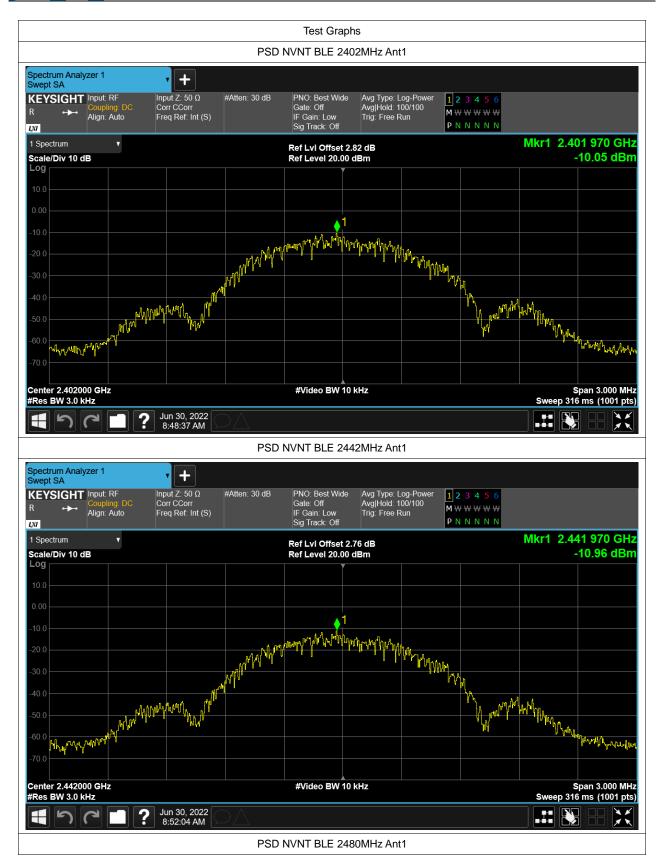



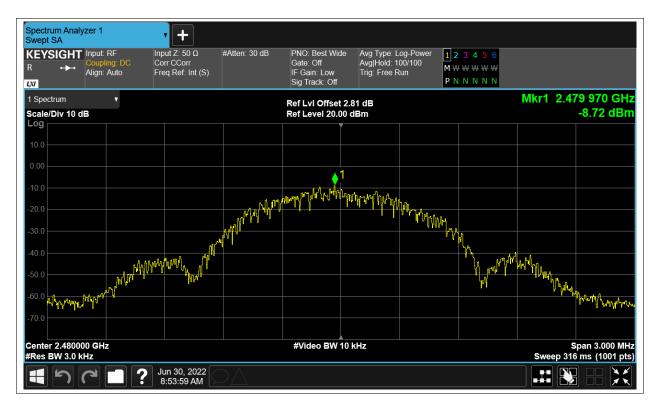







Band Edge

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE	2402	Ant1	-56.69	-20	Pass
NVNT	BLE	2480	Ant1	-58.48	-20	Pass



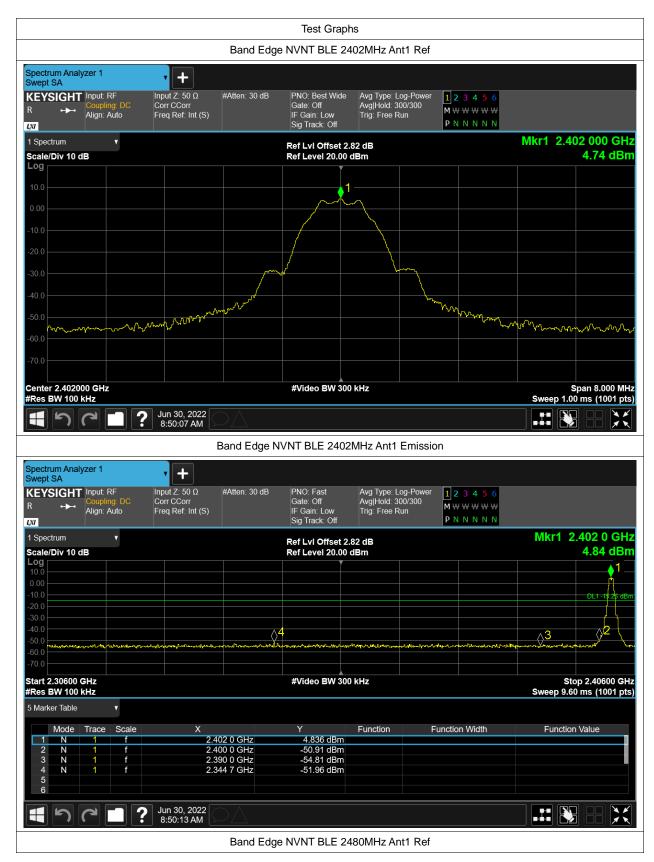



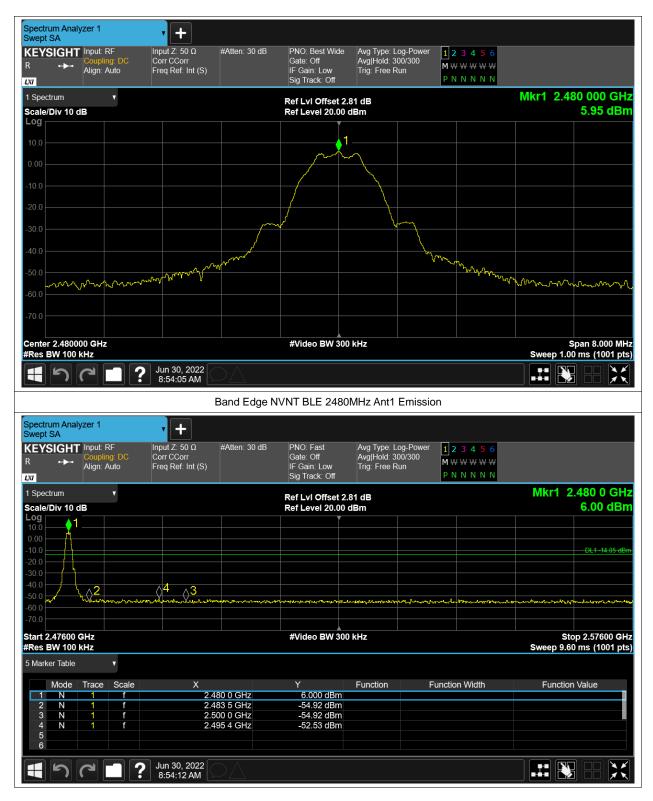





Conducted RF Spurious Emission

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE	2402	Ant1	-51.41	-20	Pass
NVNT	BLE	2442	Ant1	-50.9	-20	Pass
NVNT	BLE	2480	Ant1	-53.23	-20	Pass





Page 17 of 19



