

**Test Plot 1#: SRD 2.4G\_1.4M Chain 0\_Mid\_Handheld Back****DUT: Remote Controller; Type: EFA; Serial: CR21090095-SA-S1**

Communication System: 2.4G SDR; Frequency: 2439.5 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 2439.5$  MHz;  $\sigma = 1.779$  S/m;  $\epsilon_r = 39.157$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(7.44, 7.44, 7.44) @ 2439.5 MHz; Calibrated: 2020/11/30
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2021/9/1
- Phantom: Head model; Type: QD000P40CC; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

**Area Scan (111x151x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.294 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.896 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 0.362 W/kg

**SAR(1 g) = 0.176 W/kg; SAR(10 g) = 0.102 W/kg**

Maximum value of SAR (measured) = 0.260 W/kg

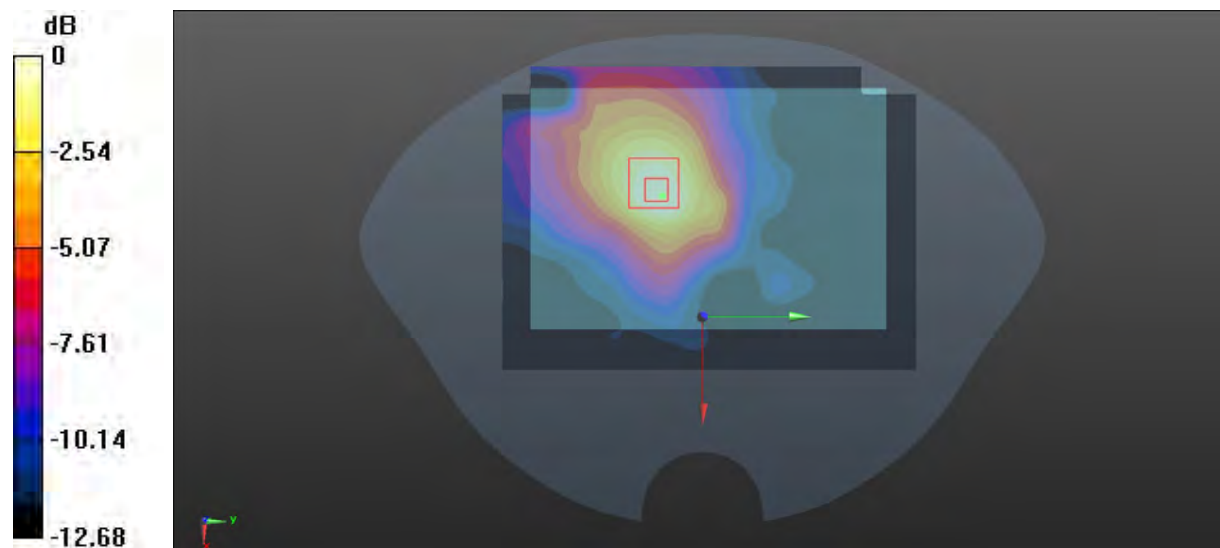

0 dB = 0.260 W/kg = -5.85 dBW/kg

**Test Plot 2#: SRD 2.4G\_1.4M Chain 0\_Mid\_Handheld Front****DUT: Remote Controller; Type: EFA; Serial: CR21090095-SA-S1**

Communication System: 2.4G SDR; Frequency: 2439.5MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 2439.5$  MHz;  $\sigma = 1.779$  S/m;  $\epsilon_r = 39.157$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(7.44, 7.44, 7.44) @ 2439.5 MHz; Calibrated: 2020/11/30
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2021/9/1
- Phantom: Head model; Type: QD000P40CC; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

**Area Scan (111x151x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.141 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.068 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.196 W/kg

**SAR(1 g) = 0.085 W/kg; SAR(10 g) = 0.054 W/kg**

Maximum value of SAR (measured) = 0.146 W/kg

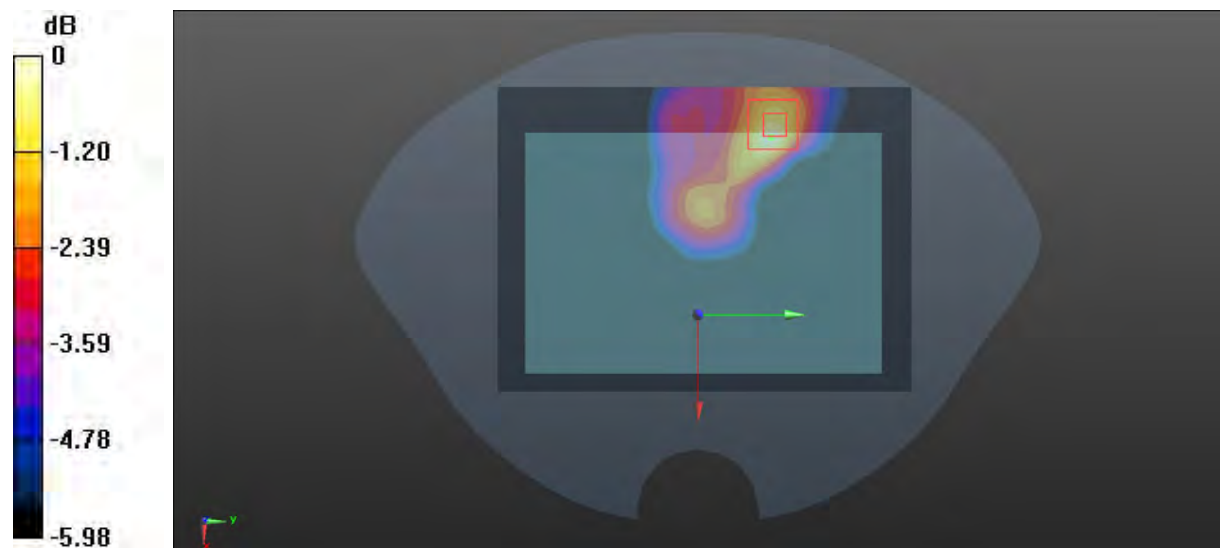

0 dB = 0.146 W/kg = -8.36 dBW/kg

**Test Plot 3#: SRD 2.4G\_1.4M Chain 0\_Mid\_Handheld Left****DUT: Remote Controller; Type: EFA; Serial: CR21090095-SA-S1**

Communication System: 2.4G SDR; Frequency: 2439.5 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 2439.5$  MHz;  $\sigma = 1.779$  S/m;  $\epsilon_r = 39.157$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(7.44, 7.44, 7.44) @ 2439.5 MHz; Calibrated: 2020/11/30
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2021/9/1
- Phantom: Head model; Type: QD000P40CC; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

**Area Scan (91x151x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.0438 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.790 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 0.0480 W/kg

**SAR(1 g) = 0.033 W/kg; SAR(10 g) = 0.023 W/kg**

Maximum value of SAR (measured) = 0.0422 W/kg

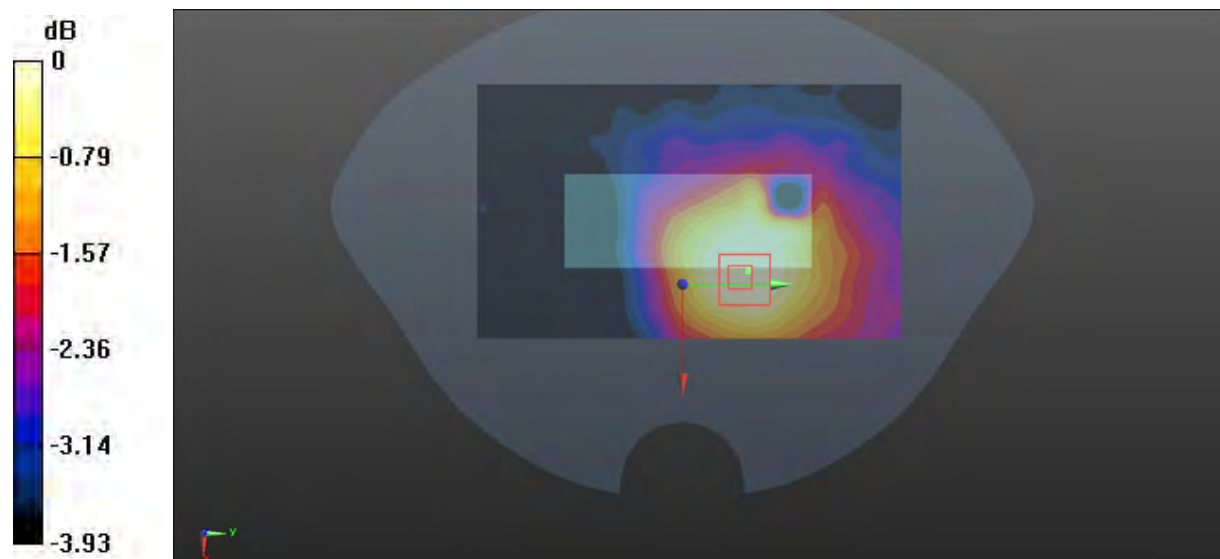

0 dB = 0.0422 W/kg = -13.75 dBW/kg

**Test Plot 4#: SRD 2.4G\_1.4M Chain 0\_Mid\_Handheld Right****DUT: Remote Controller; Type: EFA; Serial: CR21090095-SA-S1**

Communication System:, 2.4G SDR; Frequency: 2439.5 MHz;Duty Cycle: 1:1

Medium parameters used:  $f = 2439.5$  MHz;  $\sigma = 1.779$  S/m;  $\epsilon_r = 39.157$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(7.44, 7.44, 7.44) @ 2439.5 MHz; Calibrated: 2020/11/30
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2021/9/1
- Phantom: Head model; Type: QD000P40CC; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

**Area Scan (91x151x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.0798 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.132 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.0850 W/kg

**SAR(1 g) = 0.050 W/kg; SAR(10 g) = 0.034 W/kg**

Maximum value of SAR (measured) = 0.0708 W/kg

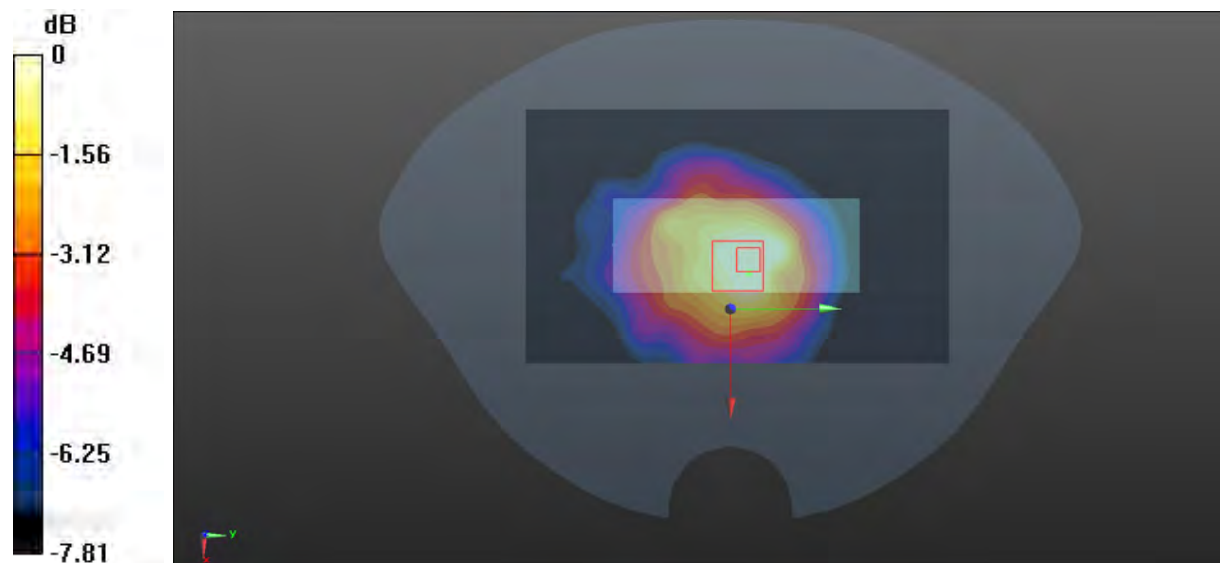

0 dB = 0.0708 W/kg = -11.50 dBW/kg

**Test Plot 5#: SRD 2.4G\_1.4M Chain 0\_Low\_Handheld Top****DUT: Remote Controller; Type: EFA; Serial: CR21090095-SA-S1**

Communication System: 2.4G SDR; Frequency: 2403.5 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 2403.5$  MHz;  $\sigma = 1.738$  S/m;  $\epsilon_r = 39.302$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(7.44, 7.44, 7.44) @ 2403.5 MHz; Calibrated: 2020/11/30
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2021/9/1
- Phantom: Head model; Type: QD000P40CC; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

**Area Scan (71x151x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 2.86 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.97 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 3.14 W/kg

**SAR(1 g) = 1.69 W/kg; SAR(10 g) = 0.857 W/kg**

Maximum value of SAR (measured) = 2.63 W/kg

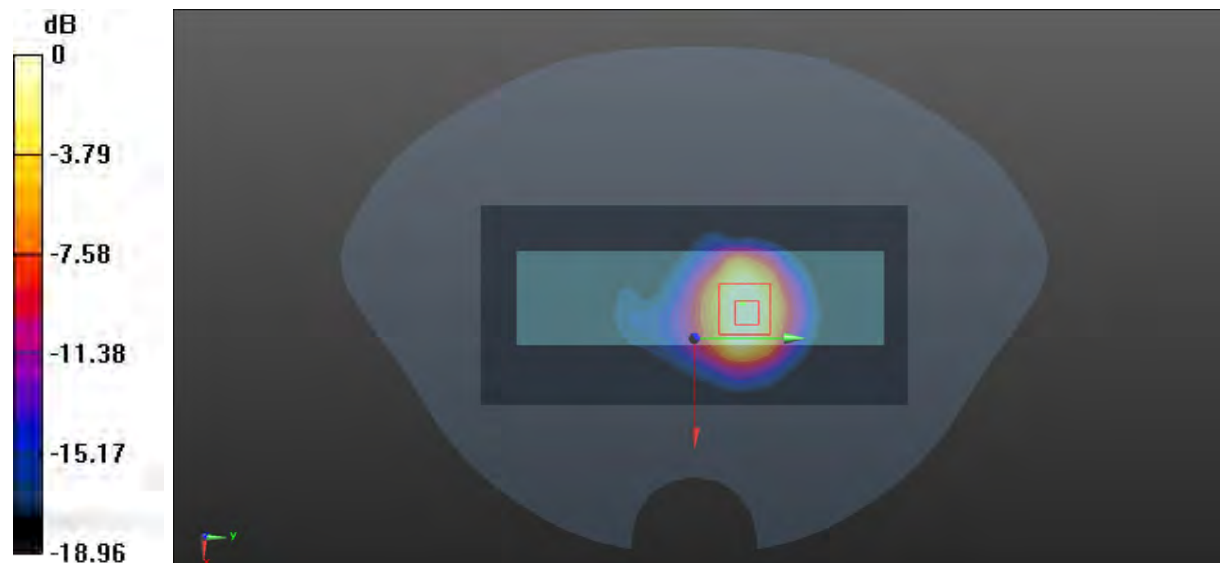

0 dB = 2.63 W/kg = 4.20 dBW/kg

**Test Plot 6#: SRD 2.4G\_1.4M Chain 0\_Mid\_Handheld Top****DUT: Remote Controller; Type: EFA; Serial: CR21090095-SA-S1**

Communication System: 2.4G SDR; Frequency:2439.5MHz;Duty Cycle: 1:1

Medium parameters used:  $f = 2439.5$  MHz;  $\sigma = 1.779$  S/m;  $\epsilon_r = 39.157$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(7.44, 7.44, 7.44) @ 2439.5 MHz; Calibrated: 2020/11/30
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2021/9/1
- Phantom: Head model; Type: QD000P40CC; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

**Area Scan (71x151x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm.

Maximum value of SAR (interpolated) = 3.28 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.302 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 3.59 W/kg

**SAR(1 g) = 1.96 W/kg; SAR(10 g) = 0.862 W/kg**

Maximum value of SAR (measured) = 3.55 W/kg

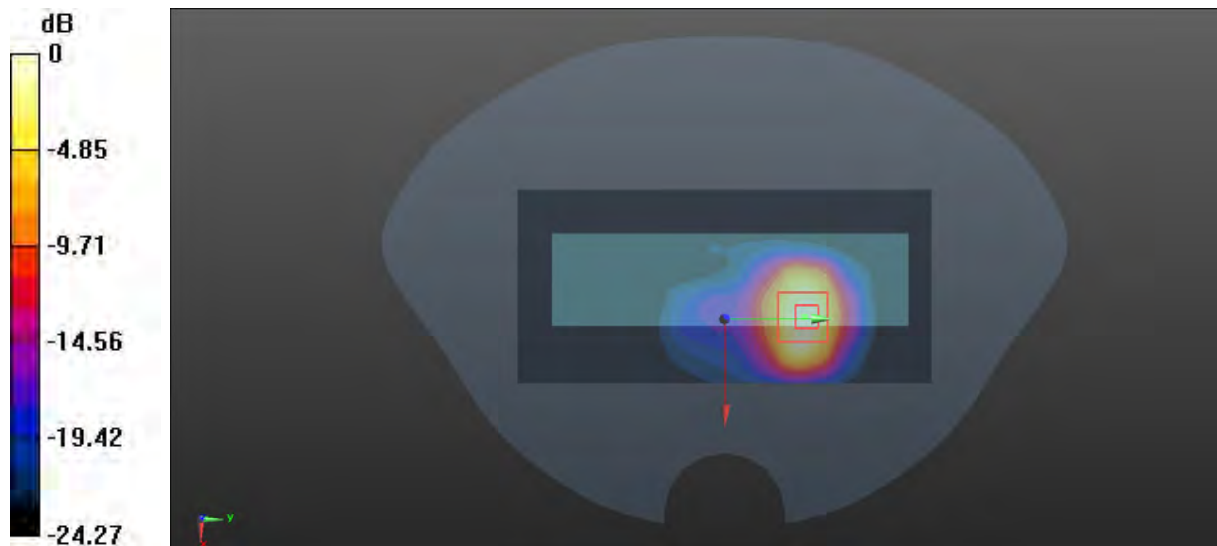

0 dB = 3.55 W/kg = 5.50 dBW/kg

**Test Plot 7#: SRD 2.4G\_1.4M Chain 0\_High\_Handheld Top****DUT: Remote Controller; Type: EFA; Serial: CR21090095-SA-S1**

Communication System: 2.4G SDR; Frequency: 2475.5 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 2475.5$  MHz;  $\sigma = 1.849$  S/m;  $\epsilon_r = 39.054$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(7.44, 7.44, 7.44) @ 2475.5 MHz; Calibrated: 2020/11/30
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2021/9/1
- Phantom: Head model; Type: QD000P40CC; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

**Area Scan (71x151x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 2.73 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.31 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 3.32 W/kg

**SAR(1 g) = 1.7 W/kg; SAR(10 g) = 0.835 W/kg**

Maximum value of SAR (measured) = 2.78 W/kg

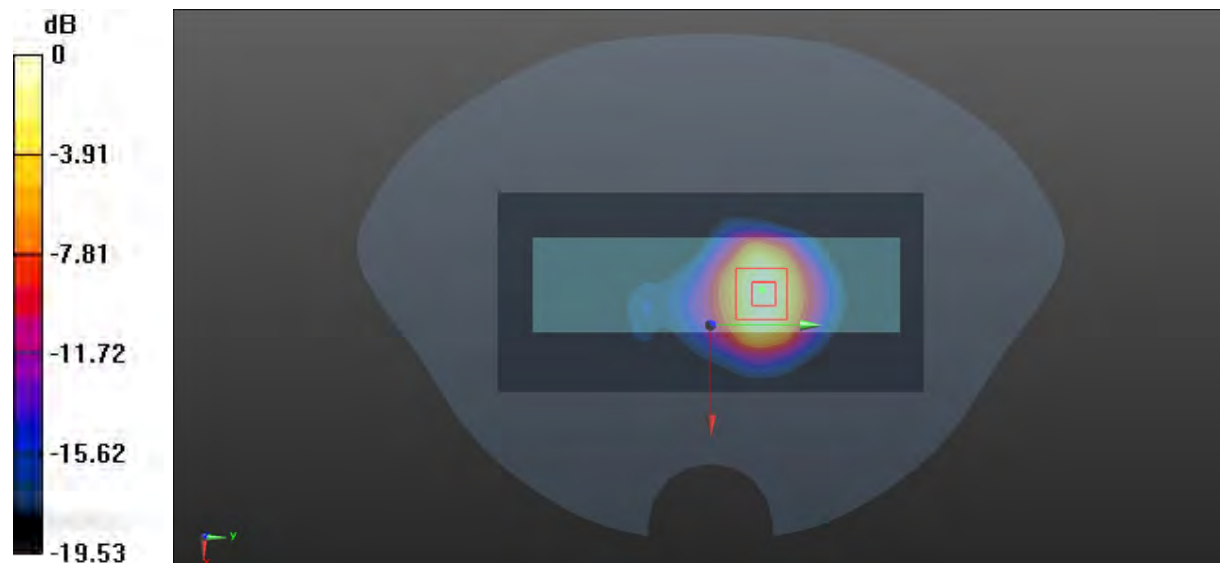

0 dB = 2.78 W/kg = 4.44 dBW/kg

**Test Plot 8#: SRD 2.4G\_20M Chain 0\_Mid\_Handheld Top****DUT: Remote Controller; Type: EFA; Serial: CR21090095-SA-S1**

Communication System: 2.4G SDR; Frequency: 2437.5 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 2437.5$  MHz;  $\sigma = 1.764$  S/m;  $\epsilon_r = 39.169$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(7.44, 7.44, 7.44) @ 2437.5 MHz; Calibrated: 2020/11/30
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2021/9/1
- Phantom: Head model; Type: QD000P40CC; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

**Area Scan (71x151x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 3.38 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.622 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 4.36 W/kg

**SAR(1 g) = 1.86 W/kg; SAR(10 g) = 0.826 W/kg**

Maximum value of SAR (measured) = 3.57 W/kg

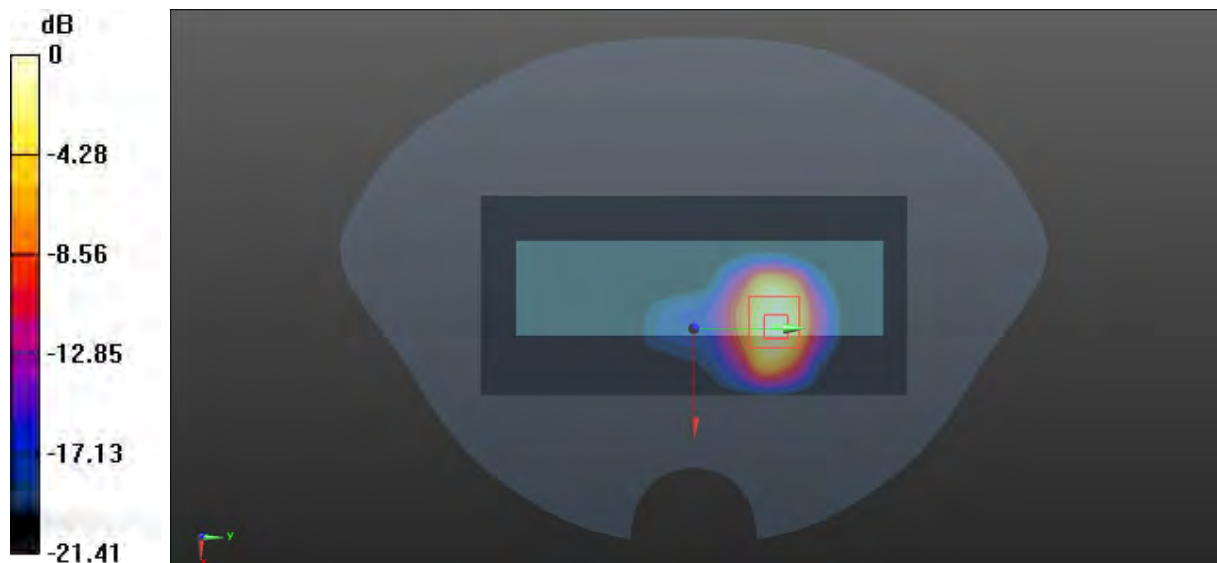

0 dB = 3.57 W/kg = 5.53 dBW/kg



**Test Plot 9#: SRD 2.4G\_1.4M Chain 0\_Mid\_Body Back****DUT: Remote Controller; Type: EFA; Serial: CR21090095-SA-S1**

Communication System: 2.4G SDR; Frequency: 2439.5 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 2439.5$  MHz;  $\sigma = 1.779$  S/m;  $\epsilon_r = 39.157$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(7.44, 7.44, 7.44) @ 2439.5 MHz; Calibrated: 2020/11/30
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2021/9/1
- Phantom: Head model; Type: QD000P40CC; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

**Area Scan (111x151x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.0868 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.764 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 0.100 W/kg

**SAR(1 g) = 0.069 W/kg; SAR(10 g) = 0.047 W/kg**

Maximum value of SAR (measured) = 0.0889 W/kg

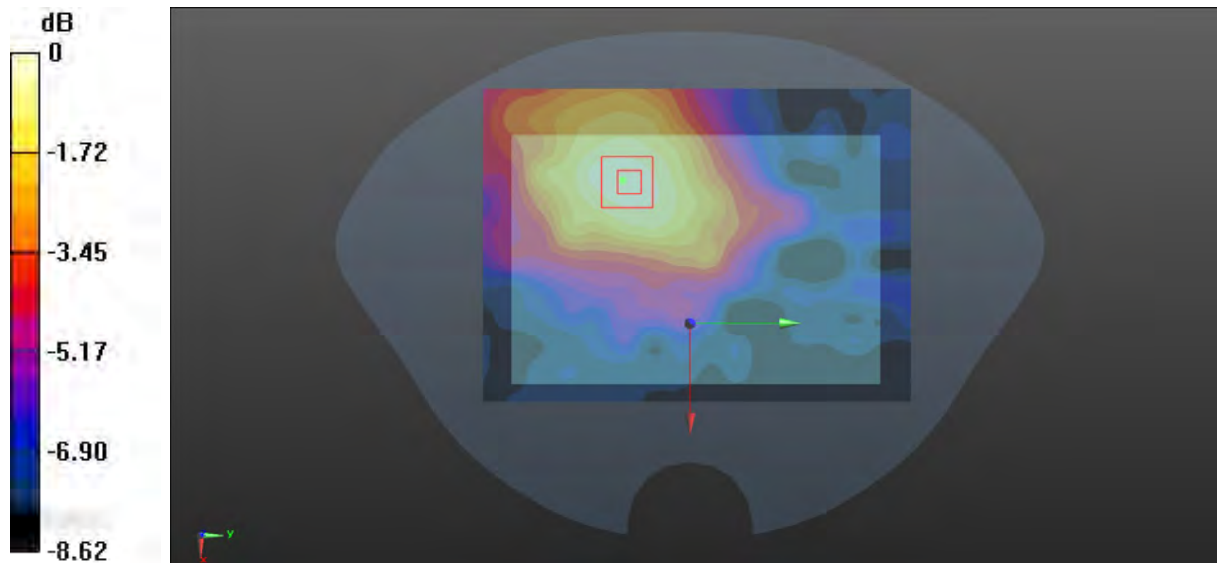

0 dB = 0.0889 W/kg = -10.51 dBW/kg

**Test Plot 10#: SRD 2.4G\_1.4M Chain 0\_Mid\_Body Front****DUT: Remote Controller; Type: EFA; Serial: CR21090095-SA-S1**

Communication System: 2.4G SDR; Frequency: 2439.5 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 2439.5$  MHz;  $\sigma = 1.779$  S/m;  $\epsilon_r = 39.157$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(7.44, 7.44, 7.44) @ 2439.5 MHz; Calibrated: 2020/11/30
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2021/9/1
- Phantom: Head model; Type: QD000P40CC; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

**Area Scan (111x151x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.0869 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.837 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.0980 W/kg

**SAR(1 g) = 0.060 W/kg; SAR(10 g) = 0.040 W/kg**

Maximum value of SAR (measured) = 0.0830 W/kg

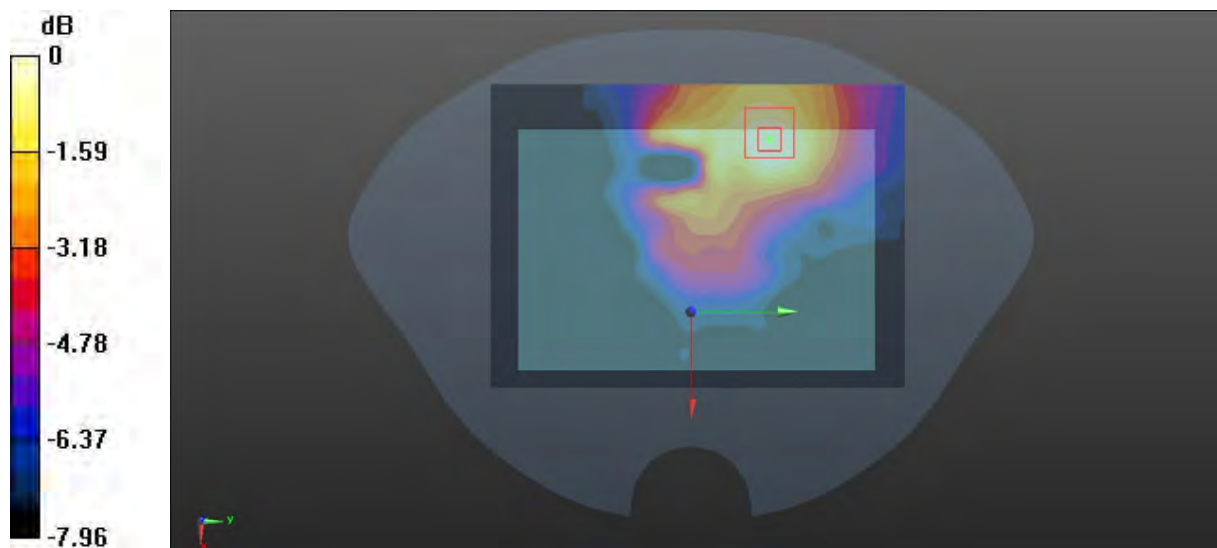

0 dB = 0.0830 W/kg = -10.81 dBW/kg

**Test Plot 11#: SRD 2.4G\_1.4M Chain 0\_Mid\_Body Left****DUT: Remote Controller; Type: EFA; Serial: CR21090095-SA-S1**

Communication System: 2.4G SDR; Frequency: 2439.5 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 2439.5$  MHz;  $\sigma = 1.779$  S/m;  $\epsilon_r = 39.157$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(7.44, 7.44, 7.44) @ 2439.5 MHz; Calibrated: 2020/11/30
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2021/9/1
- Phantom: Head model; Type: QD000P40CC; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

**Area Scan (101x141x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.0431 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.816 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 0.0480 W/kg

**SAR(1 g) = 0.034 W/kg; SAR(10 g) = 0.024 W/kg**

Maximum value of SAR (measured) = 0.0437 W/kg

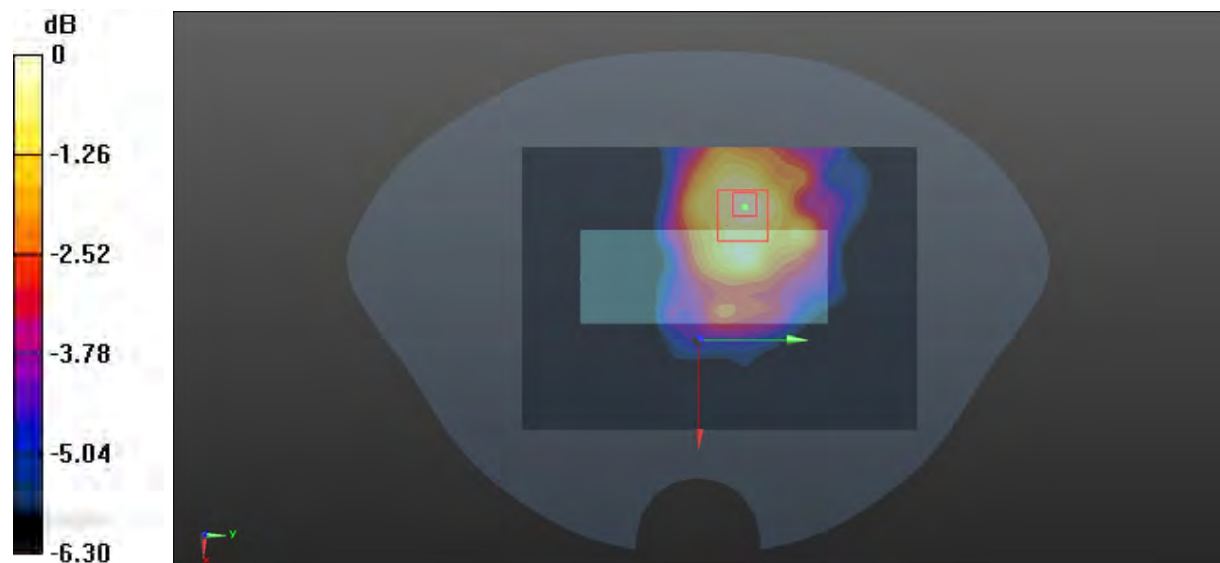

0 dB = 0.0437 W/kg = -13.60 dBW/kg

**Test Plot 12#: SRD 2.4G\_1.4M Chain 0\_Mid\_Body Right****DUT: Remote Controller; Type: EFA; Serial: CR21090095-SA-S1**

Communication System: 2.4G SDR; Frequency: 2439.5 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 2439.5$  MHz;  $\sigma = 1.779$  S/m;  $\epsilon_r = 39.157$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(7.44, 7.44, 7.44) @ 2439.5 MHz; Calibrated: 2020/11/30
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2021/9/1
- Phantom: Head model; Type: QD000P40CC; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

**Area Scan (91x151x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.0201 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.736 V/m; Power Drift = -0.19 dB

Peak SAR (extrapolated) = 0.0230 W/kg

**SAR(1 g) = 0.015 W/kg; SAR(10 g) = 0.012 W/kg**

Maximum value of SAR (measured) = 0.0187 W/kg

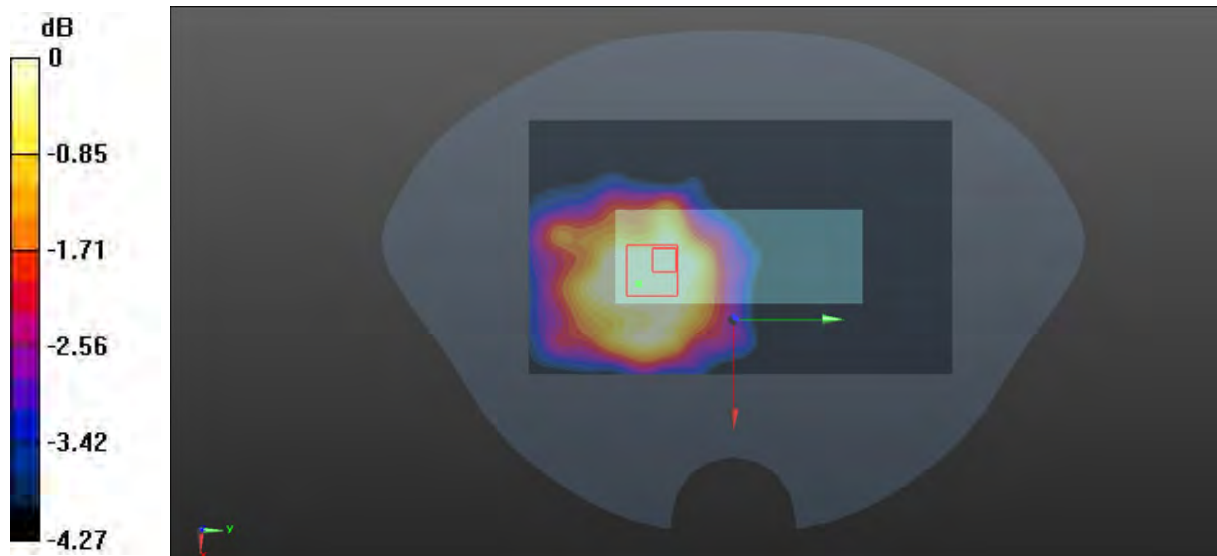

0 dB = 0.0187 W/kg = -17.28 dBW/kg

**Test Plot 13#: SRD 2.4G\_1.4M Chain 0\_Low\_Body Top****DUT: Remote Controller; Type: EFA; Serial: CR21090095-SA-S1**

Communication System: 2.4G SDR; Frequency: 2403.5 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 2403.5$  MHz;  $\sigma = 1.738$  S/m;  $\epsilon_r = 39.302$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(7.44, 7.44, 7.44) @ 2403.5 MHz; Calibrated: 2020/11/30
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2021/9/1
- Phantom: Head model; Type: QD000P40CC; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

**Area Scan (71x151x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 1.10 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.08 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 1.19 W/kg

**SAR(1 g) = 0.713 W/kg; SAR(10 g) = 0.392 W/kg**

Maximum value of SAR (measured) = 1.03 W/kg

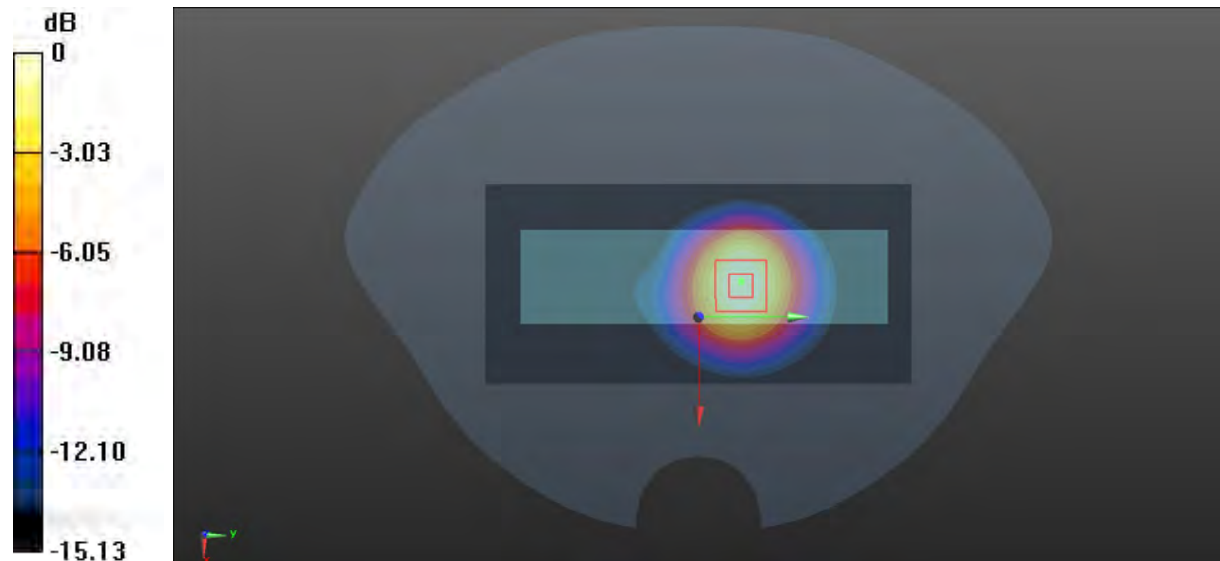

0 dB = 1.03 W/kg = 0.13 dBW/kg

**Test Plot 14# SRD 2.4G\_1.4M\_Chain 0\_Mid\_Body Top****DUT: Remote Controller; Type: EFA; Serial: CR21090095-SA-S1**

Communication System: 2.4G SDR; Frequency: 2439.5MHz;Duty Cycle: 1:1

Medium parameters used:  $f = 2439.5$  MHz;  $\sigma = 1.779$  S/m;  $\epsilon_r = 39.157$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(7.44, 7.44, 7.44) @ 2439.5 MHz; Calibrated: 2020/11/30
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2021/9/1
- Phantom: Head model; Type: QD000P40CC; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

**Area Scan (71x151x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.936 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.11 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 1.02 W/kg

**SAR(1 g) = 0.606 W/kg; SAR(10 g) = 0.333 W/kg**

Maximum value of SAR (measured) = 0.886 W/kg

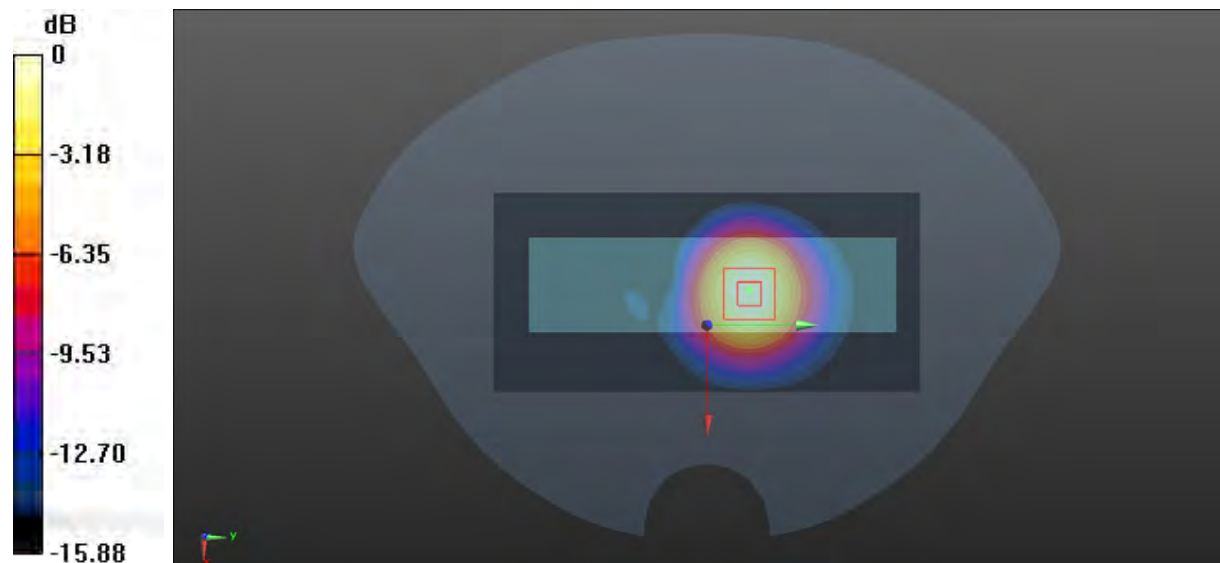

0 dB = 0.886 W/kg = -0.53 dBW/kg

**Test Plot 15#: SRD 2.4G\_1.4M Chain 0\_High\_Body Top****DUT: Remote Controller; Type: EFA; Serial: CR21090095-SA-S1**

Communication System: 2.4G SDR; Frequency: 2475.5 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 2475.5$  MHz;  $\sigma = 1.849$  S/m;  $\epsilon_r = 39.054$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(7.44, 7.44, 7.44) @ 2475.5 MHz; Calibrated: 2020/11/30
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2021/9/1
- Phantom: Head model; Type: QD000P40CC; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

**Area Scan (71x151x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.959 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.92 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 1.04 W/kg

**SAR(1 g) = 0.618 W/kg; SAR(10 g) = 0.338 W/kg**

Maximum value of SAR (measured) = 0.908 W/kg

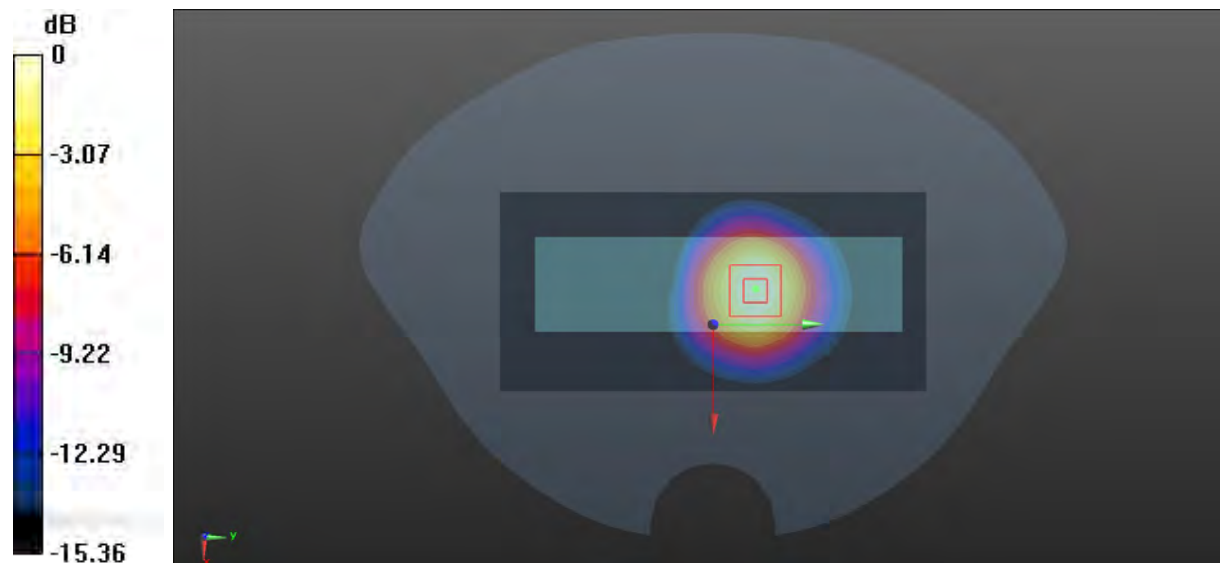

0 dB = 0.908 W/kg = -0.42 dBW/kg

**Test Plot 16#: SRD 2.4G\_20M Chain 0\_Mid\_Body Top****DUT: Remote Controller; Type: EFA; Serial: CR21090095-SA-S1**

Communication System: 2.4G SDR; Frequency: 2437.5 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 2437.5$  MHz;  $\sigma = 1.764$  S/m;  $\epsilon_r = 39.169$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(7.44, 7.44, 7.44) @ 2437.5 MHz; Calibrated: 2020/11/30
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2021/9/1
- Phantom: Head model; Type: QD000P40CC; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

**Area Scan (71x151x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.577 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.620 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.690 W/kg

**SAR(1 g) = 0.406 W/kg; SAR(10 g) = 0.227 W/kg**

Maximum value of SAR (measured) = 0.589 W/kg

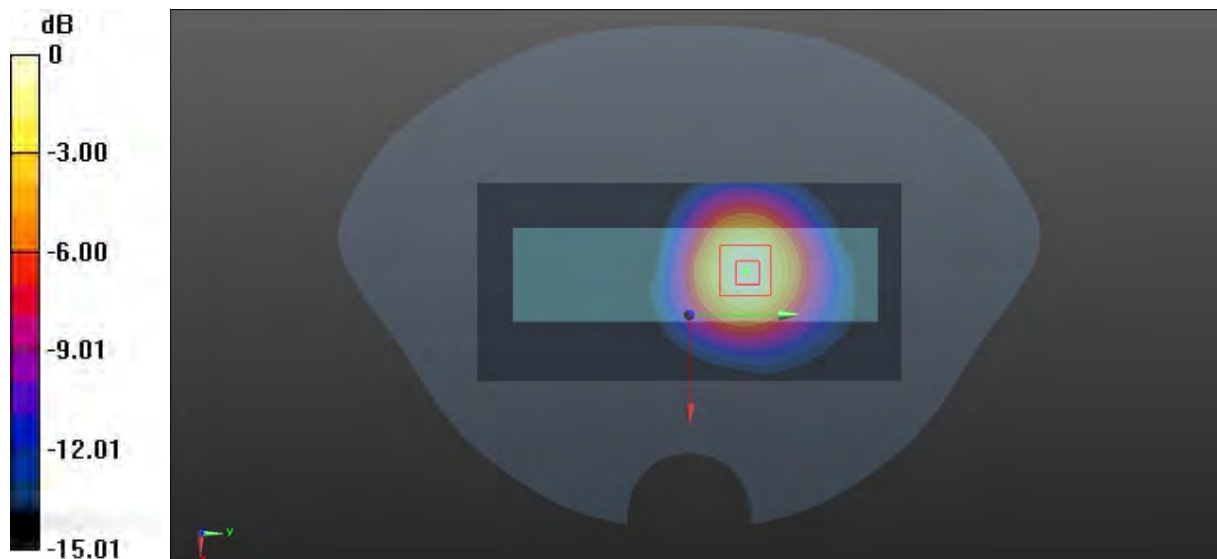

0 dB = 0.589 W/kg = -2.30 dBW/kg



**Test Plot 17#: SRD 2.4G\_1.4M Chain 1\_Mid\_Handheld Back****DUT: Remote Controller; Type: EFA; Serial: CR21090095-SA-S1**

Communication System: 2.4G SDR; Frequency: 2439.5 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 2439.5$  MHz;  $\sigma = 1.779$  S/m;  $\epsilon_r = 39.157$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(7.44, 7.44, 7.44) @ 2439.5 MHz; Calibrated: 2020/11/30
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2021/9/1
- Phantom: Head model; Type: QD000P40CC; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

**Area Scan (111x151x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.245 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.444 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 0.438 W/kg

**SAR(1 g) = 0.148 W/kg; SAR(10 g) = 0.056 W/kg**

Maximum value of SAR (measured) = 0.227 W/kg

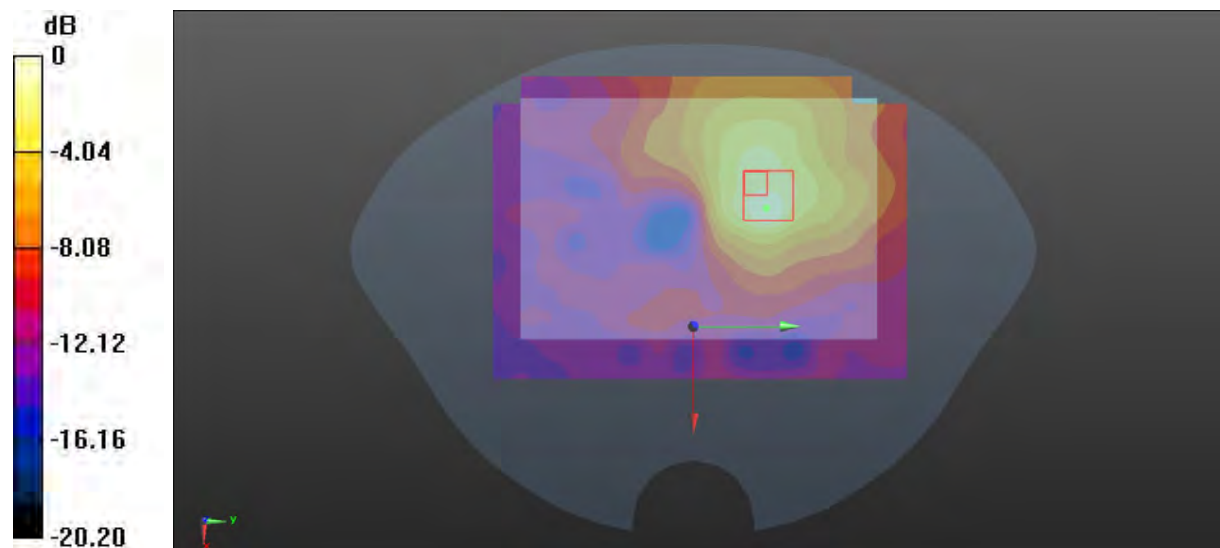

0 dB = 0.227 W/kg = -6.44 dBW/kg

**Test Plot 18#: SRD 2.4G\_1.4M Chain 1\_Mid\_Handheld Front****DUT: Remote Controller; Type: EFA; Serial: CR21090095-SA-S1**

Communication System: 2.4GSRD; Frequency: 2439.5 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 2439.5\text{MHz}$ ;  $\sigma = 1.779\text{ S/m}$ ;  $\epsilon_r = 39.157$ ;  $\rho = 1000\text{ kg/m}^3$ 

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(7.44, 7.44, 7.44) @ 2439.5MHz; Calibrated: 2020/11/30
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2021/9/1
- Phantom: Head model; Type: QD000P40CC; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

**Area Scan (111x151x1):** Interpolated grid:  $dx=1.200\text{ mm}$ ,  $dy=1.200\text{ mm}$ 

Maximum value of SAR (interpolated) = 0.977 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$ 

Reference Value = 6.774 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 3.07 W/kg

**SAR(1 g) = 0.662 W/kg; SAR(10 g) = 0.220 W/kg**

Maximum value of SAR (measured) = 2.04 W/kg

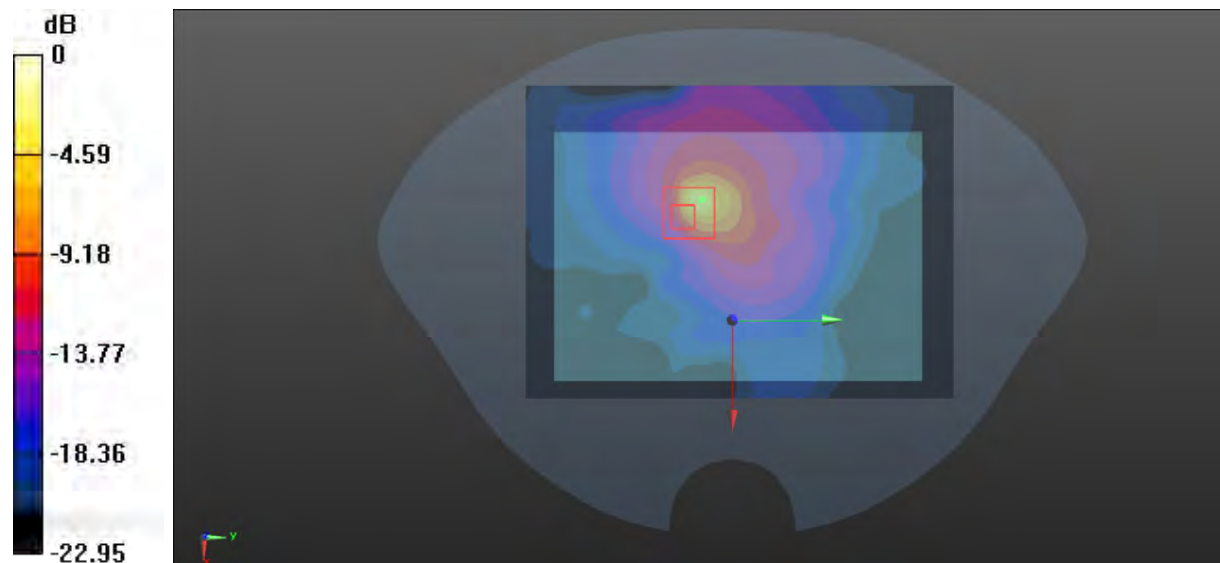

0 dB = 2.04 W/kg = 3.10 dBW/kg

**Test Plot 19#: SRD 2.4G\_1.4M Chain 1\_Mid\_Handheld Left****DUT: Remote Controller; Type: EFA; Serial: CR21090095-SA-S1**

Communication System: 2.4G SDR; Frequency: 2439.5 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 2439.5$  MHz;  $\sigma = 1.779$  S/m;  $\epsilon_r = 39.157$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(7.44, 7.44, 7.44) @ 2439.5 MHz; Calibrated: 2020/11/30
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2021/9/1
- Phantom: Head model; Type: QD000P40CC; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

**Area Scan (91x151x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 1.49 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 16.38 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 1.70 W/kg

**SAR(1 g) = 0.911 W/kg; SAR(10 g) = 0.455 W/kg**

Maximum value of SAR (measured) = 1.40 W/kg

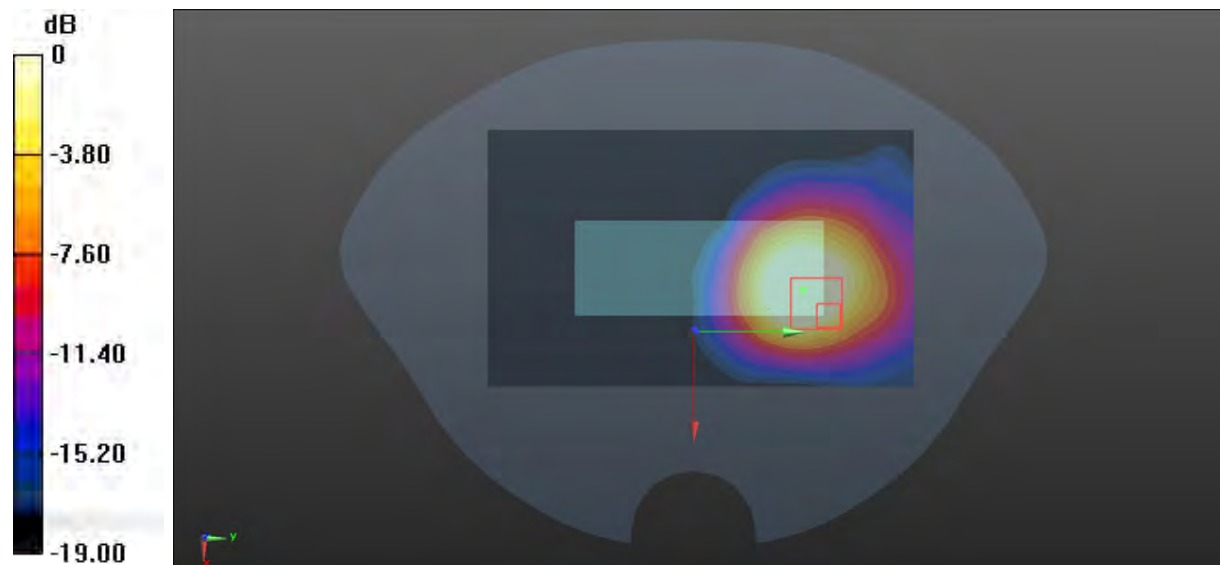

0 dB = 1.40 W/kg = 1.46 dBW/kg

**Test Plot 20#: SRD 2.4G\_1.4M Chain 1\_Mid\_Handheld Right****DUT: Remote Controller; Type: EFA; Serial: CR21090095-SA-S1**

Communication System: 2.4G SDR; Frequency: 2439.5 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 2439.5$  MHz;  $\sigma = 1.779$  S/m;  $\epsilon_r = 39.157$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(7.44, 7.44, 7.44) @ 2439.5 MHz; Calibrated: 2020/11/30
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2021/9/1
- Phantom: Head model; Type: QD000P40CC; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

**Area Scan (91x151x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.0161 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.203 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 0.0180 W/kg

**SAR(1 g) = 0.013 W/kg; SAR(10 g) = 0.011 W/kg**

Maximum value of SAR (measured) = 0.0154 W/kg

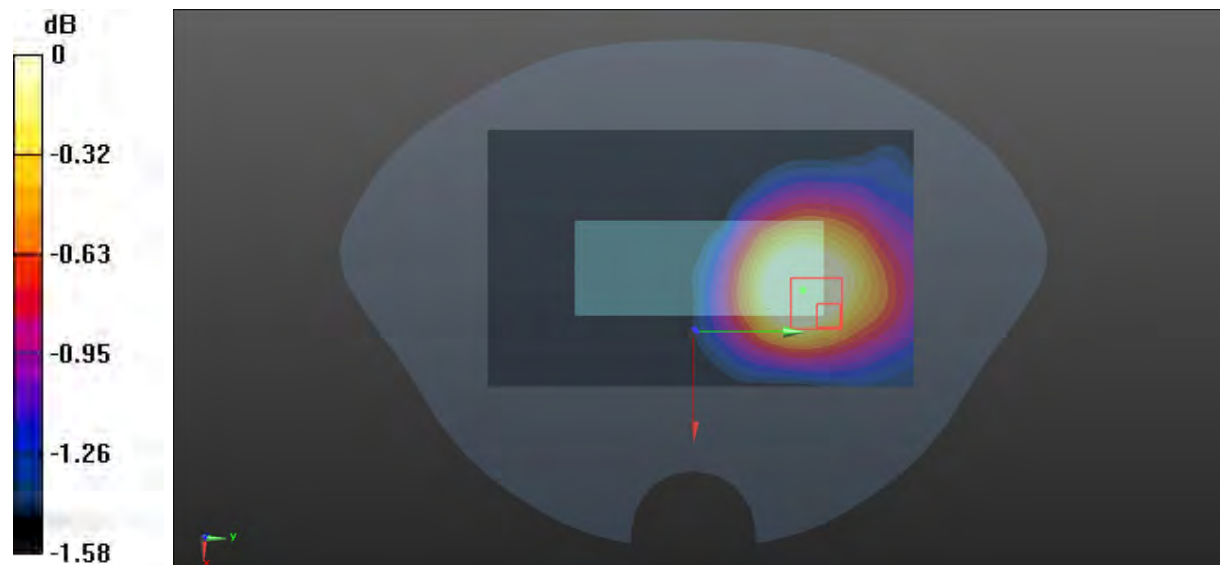

0 dB = 0.0154 W/kg = -18.12 dBW/kg

**Test Plot 21#: SRD 2.4G\_1.4M Chain 1\_Low\_Handheld Top****DUT: Remote Controller; Type: EFA; Serial: CR21090095-SA-S1**

Communication System: 2.4G SDR; Frequency: 2403.5 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 2403.5$  MHz;  $\sigma = 1.738$  S/m;  $\epsilon_r = 39.302$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(7.44, 7.44, 7.44) @ 2403.5 MHz; Calibrated: 2020/11/30
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2021/9/1
- Phantom: Head model; Type: QD000P40CC; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

**Area Scan (71x151x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 1.71 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.956 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 2.06 W/kg

**SAR(1 g) = 1.05 W/kg; SAR(10 g) = 0.516 W/kg**

Maximum value of SAR (measured) = 1.58 W/kg

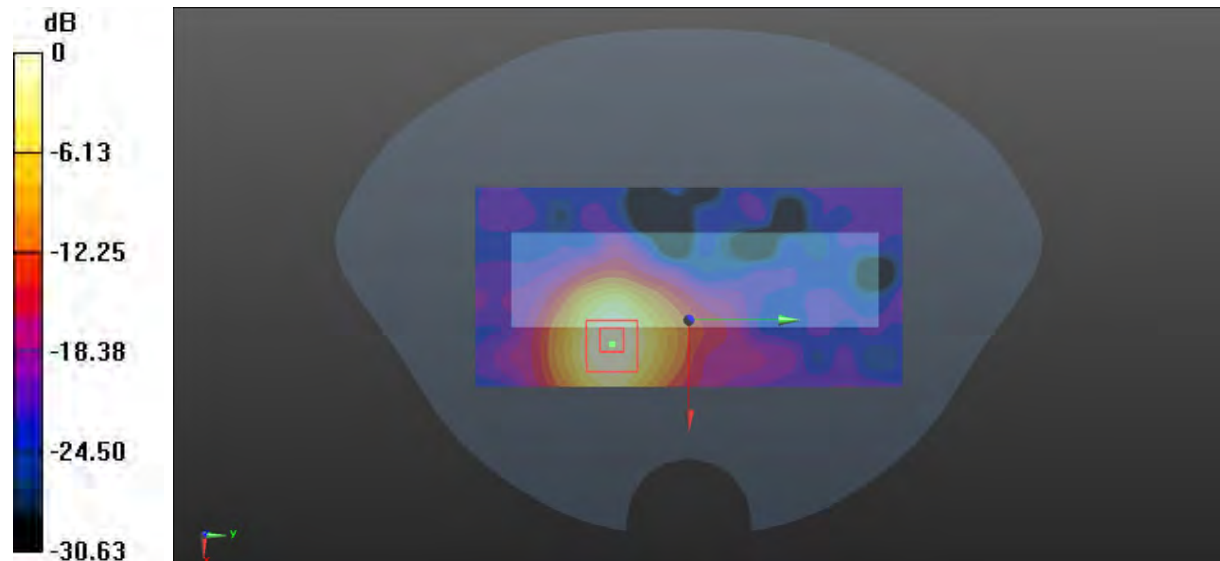

0 dB = 1.58 W/kg = 1.99 dBW/kg

**Test Plot 22#: SRD 2.4G\_1.4M Chain 1\_Mid\_Handheld Top****DUT: Remote Controller; Type: EFA; Serial: CR21090095-SA-S1**

Communication System: 2.4G SDR; Frequency: 2439.5 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 2439.5$  MHz;  $\sigma = 1.779$  S/m;  $\epsilon_r = 39.157$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(7.44, 7.44, 7.44) @ 2439.5MHz; Calibrated: 2020/11/30
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2021/9/1
- Phantom: Head model; Type: QD000P40CC; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

**Area Scan (71x151x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 1.77 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.958 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 1.90 W/kg

**SAR(1 g) = 1.39 W/kg; SAR(10 g) = 0.699 W/kg.**

Maximum value of SAR (measured) = 1.65 W/kg

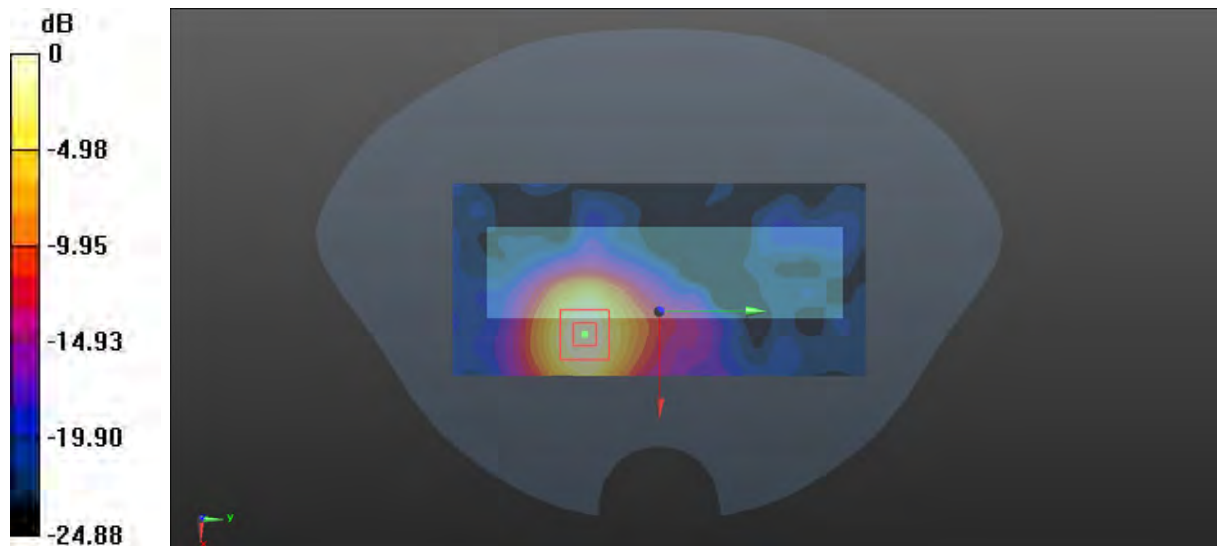

0 dB = 1.65 W/kg = 2.17 dBW/kg

**Test Plot 23#: SRD 2.4G\_1.4M Chain 1\_High\_Handheld Top****DUT: Remote Controller; Type: EFA; Serial: CR21090095-SA-S1**

Communication System: 2.4G SDR; Frequency: 2475.5 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 2475.5$  MHz;  $\sigma = 1.849$  S/m;  $\epsilon_r = 39.054$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(7.44, 7.44, 7.44) @ 2475.5 MHz; Calibrated: 2020/11/30
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2021/9/1
- Phantom: Head model; Type: QD000P40CC; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

**Area Scan (71x151x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 1.33 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.871 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 1.59 W/kg

**SAR(1 g) = 0.860 W/kg; SAR(10 g) = 0.410 W/kg**

Maximum value of SAR (measured) = 1.35 W/kg

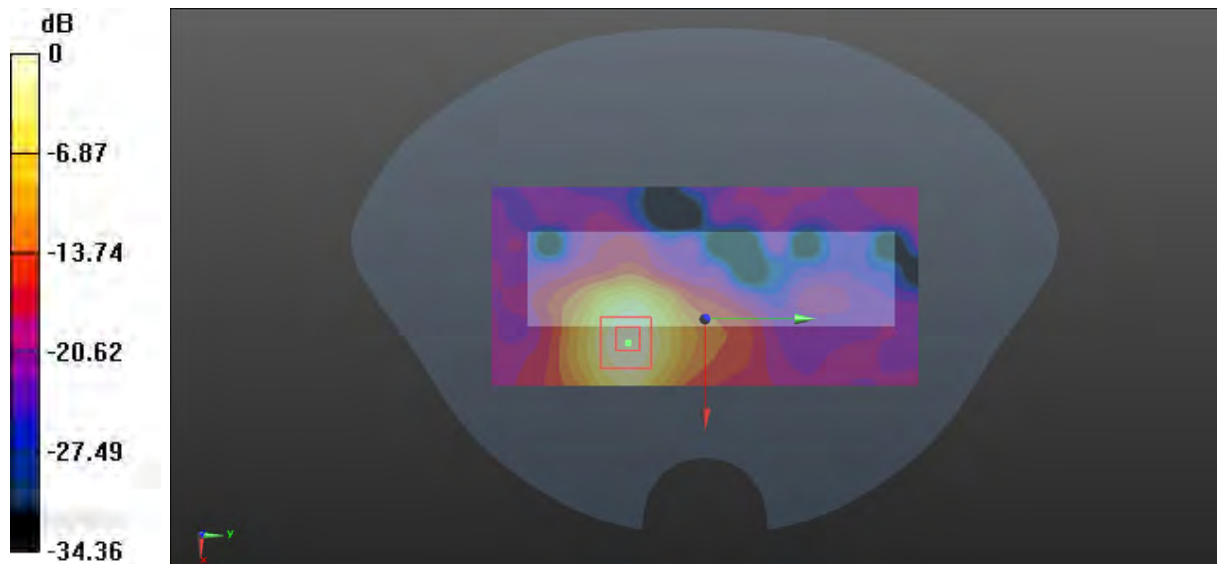

0 dB = 1.35 W/kg = 1.30 dBW/kg

**Test Plot 24#: SDR 2.4G \_ 20M Chain 1\_Mid\_Handheld Top****DUT: Remote Controller; Type: EFA; Serial: CR21090095-SA-S1**

Communication System: 2.4G SDR; Frequency: 2437.5 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 2437.5$  MHz;  $\sigma = 1.764$  S/m;  $\epsilon_r = 39.169$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(7.44, 7.44, 7.44) @ 2437.5 MHz; Calibrated: 2020/11/30
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2021/9/1
- Phantom: Head model; Type: QD000P40CC; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

**Area Scan (71x151x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 2.01 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.146 V/m; Power Drift = -0.20 dB

Peak SAR (extrapolated) = 3.47 W/kg

**SAR(1 g) = 1.05 W/kg; SAR(10 g) = 0.513 W/kg**

Maximum value of SAR (measured) = 2.60 W/kg

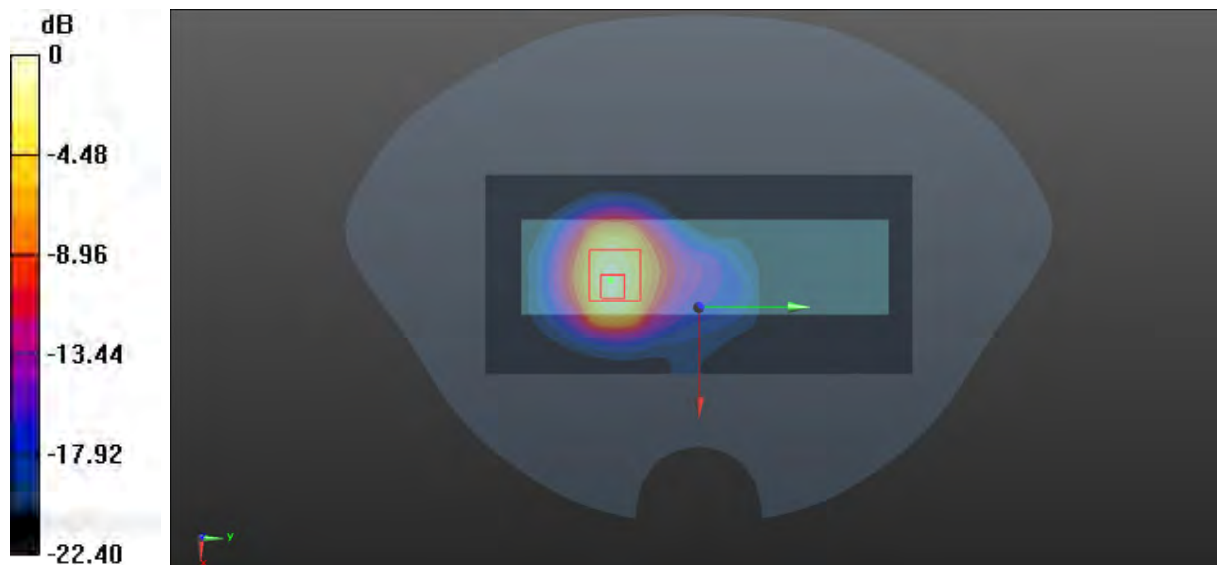

0 dB = 2.60 W/kg = 4.15 dBW/kg



**Test Plot 25#: SRD 2.4G\_1.4M Chain 1\_Mid\_Body Back****DUT: Remote Controller; Type: EFA; Serial: CR21090095-SA-S1**

Communication System: 2.4G SDR; Frequency: 2439.5 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 2439.5$  MHz;  $\sigma = 1.779$  S/m;  $\epsilon_r = 39.157$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(7.44, 7.44, 7.44) @ 2439.5 MHz; Calibrated: 2020/11/30
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2021/9/1
- Phantom: Head model; Type: QD000P40CC; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

**Area Scan (121x151x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.222 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.686 V/m; Power Drift =0.09 dB

Peak SAR (extrapolated) = 0.285 W/kg

**SAR(1 g) = 0.148 W/kg; SAR(10 g) = 0.080 W/kg**

Maximum value of SAR (measured) = 0.217 W/kg

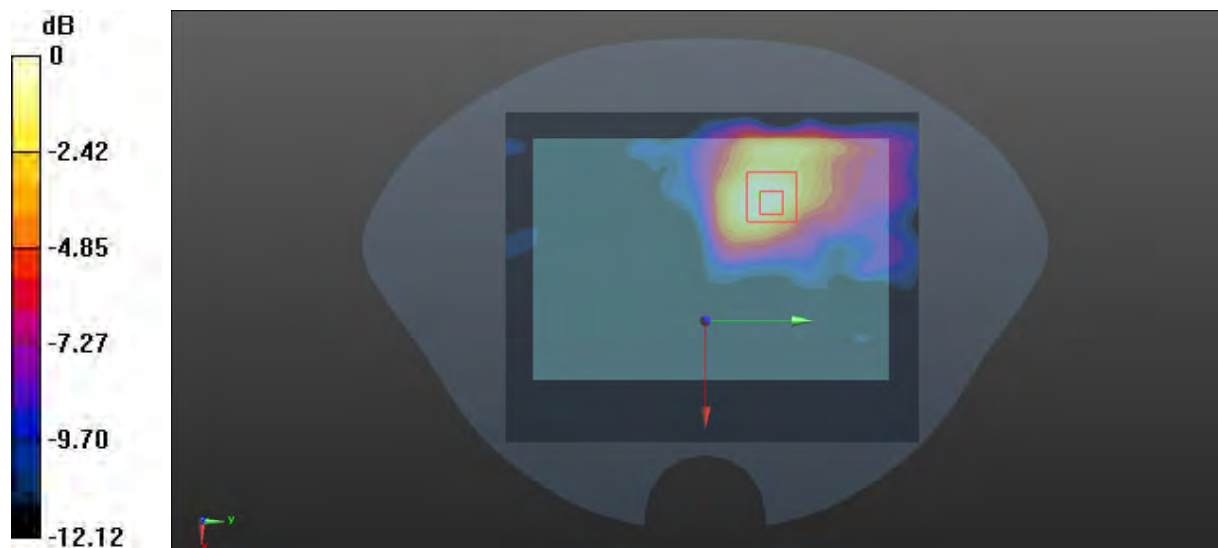

0 dB = 0.217 W/kg = -6.64 dBW/kg

**Test Plot 26#: SRD 2.4G\_1.4M Chain 1\_Mid\_Body Front****DUT: Remote Controller; Type: EFA; Serial: CR21090095-SA-S1**

Communication System: 2.4G SDR; Frequency: 2439.5 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 2439.5$  MHz;  $\sigma = 1.779$  S/m;  $\epsilon_r = 39.157$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(7.44, 7.44, 7.44) @ 2439.5 MHz; Calibrated: 2020/11/30
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2021/9/1
- Phantom: Head model; Type: QD000P40CC; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

**Area Scan (111x151x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.0785 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.036 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.108 W/kg

**SAR(1 g) = 0.065 W/kg; SAR(10 g) = 0.043 W/kg**

Maximum value of SAR (measured) = 0.0918 W/kg

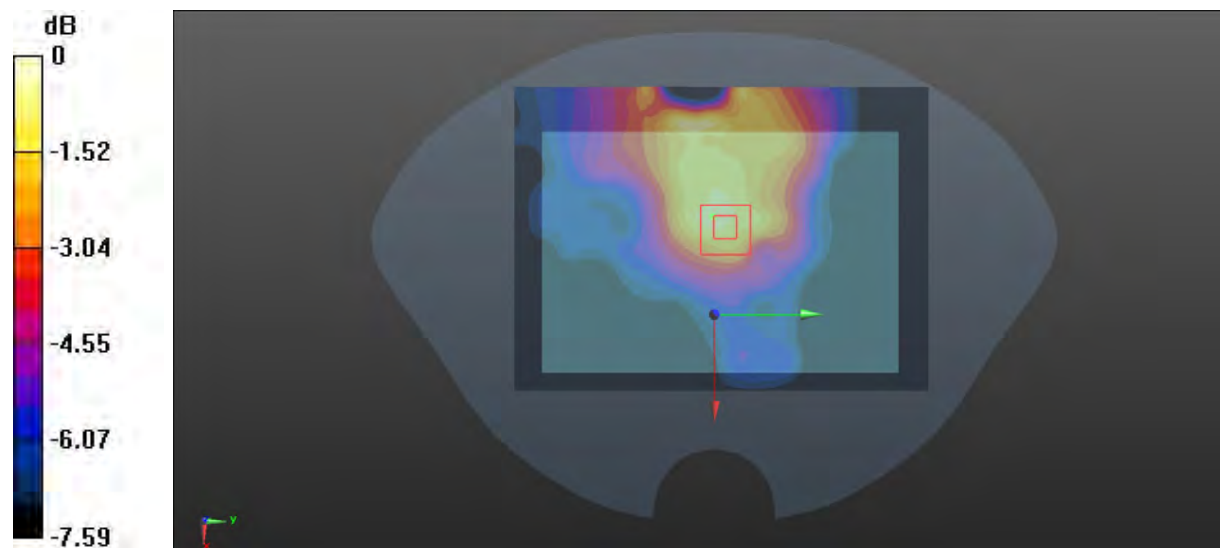

0 dB = 0.0918 W/kg = -10.37 dBW/kg

**Test Plot 27#: SRD 2.4G\_1.4M Chain 1\_Mid\_Body Left****DUT: Remote Controller; Type: EFA; Serial: CR21090095-SA-S1**

Communication System: 2.4G SDR; Frequency: 2439.5 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 2439.5$  MHz;  $\sigma = 1.779$  S/m;  $\epsilon_r = 39.157$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(7.44, 7.44, 7.44) @ 2439.5 MHz; Calibrated: 2020/11/30
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2021/9/1
- Phantom: Head model; Type: QD000P40CC; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

**Area Scan (91x151x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.327 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.394 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.319 W/kg

**SAR(1 g) = 0.137 W/kg; SAR(10 g) = 0.035 W/kg**

Maximum value of SAR (measured) = 0.203 W/kg

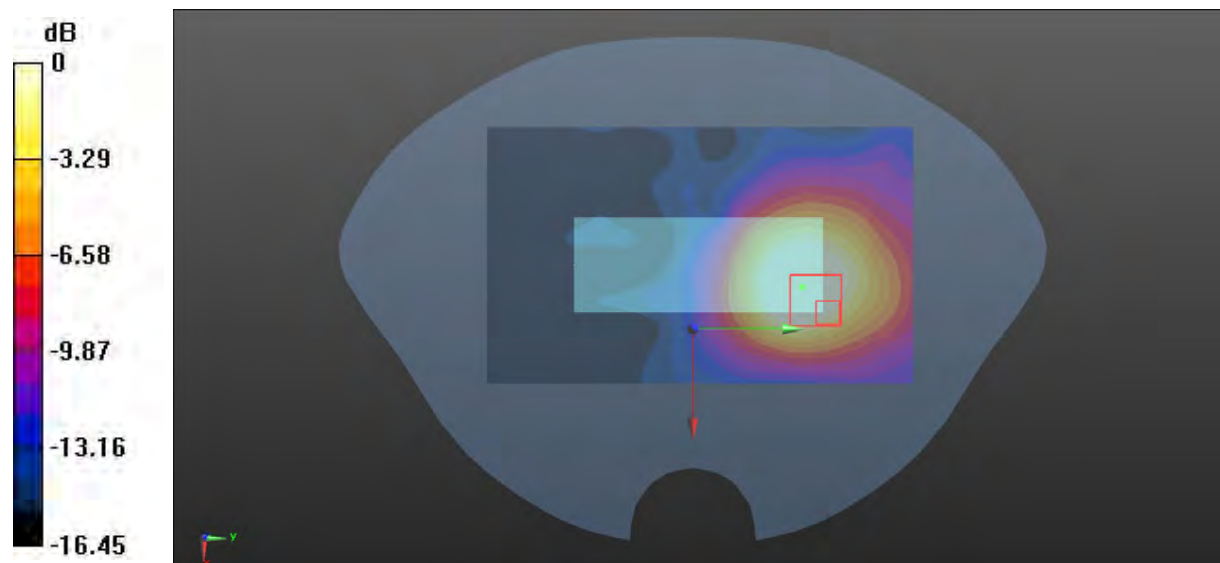

0 dB = 0.203 W/kg = -6.93 dBW/kg

**Test Plot 28#: SRD 2.4G\_1.4M Chain 1\_Mid\_Body Right****DUT: Remote Controller; Type: EFA; Serial: CR21090095-SA-S1**

Communication System: 2.4G SDR; Frequency: 2439.5 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 2439.5$  MHz;  $\sigma = 1.779$  S/m;  $\epsilon_r = 39.157$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(7.44, 7.44, 7.44) @ 2439.5 MHz; Calibrated: 2020/11/30
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2021/9/1
- Phantom: Head model; Type: QD000P40CC; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

**Area Scan (91x151x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.0622 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.561 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 0.0680 W/kg

**SAR(1 g) = 0.048 W/kg; SAR(10 g) = 0.034 W/kg**

Maximum value of SAR (measured) = 0.0611 W/kg

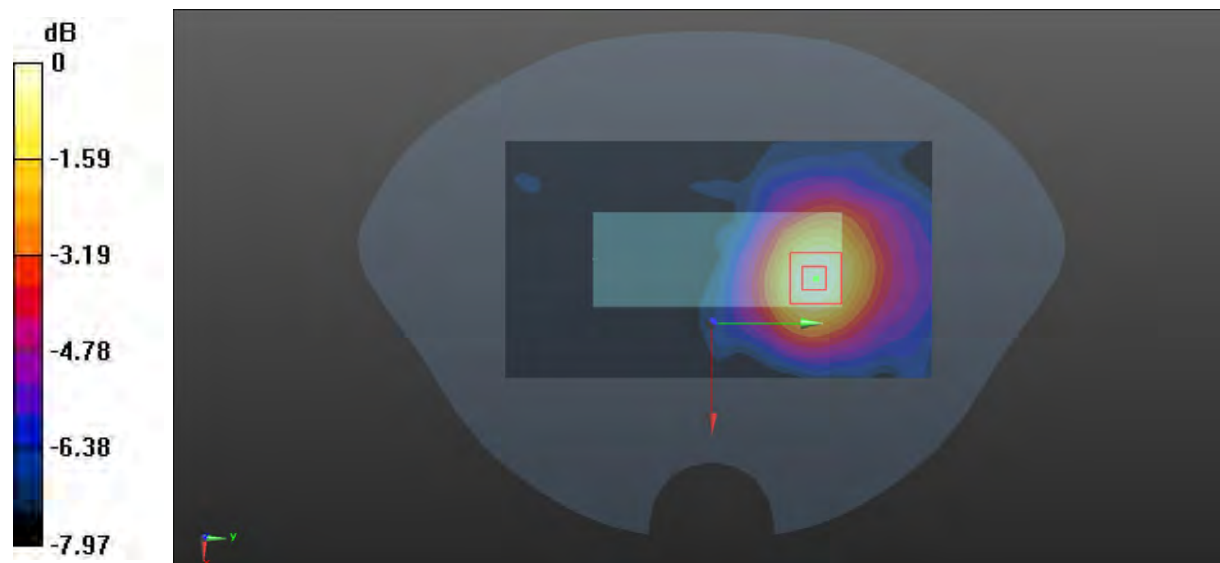

0 dB = 0.0611 W/kg = -12.14 dBW/kg

**Test Plot 29#: SRD 2.4G\_1.4M Chain 1\_Low\_Body Top****DUT: Remote Controller; Type: EFA; Serial: CR21090095-SA-S1**

Communication System: 2.4G SDR; Frequency: 2403.5 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 2403.5$  MHz;  $\sigma = 1.738$  S/m;  $\epsilon_r = 39.302$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(7.44, 7.44, 7.44) @ 2403.5 MHz; Calibrated: 2020/11/30
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2021/9/1
- Phantom: Head model; Type: QD000P40CC; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

**Area Scan (71x151x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.841 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.621 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 0.999 W/kg

**SAR(1 g) = 0.602 W/kg; SAR(10 g) = 0.324 W/kg**

Maximum value of SAR (measured) = 0.867 W/kg

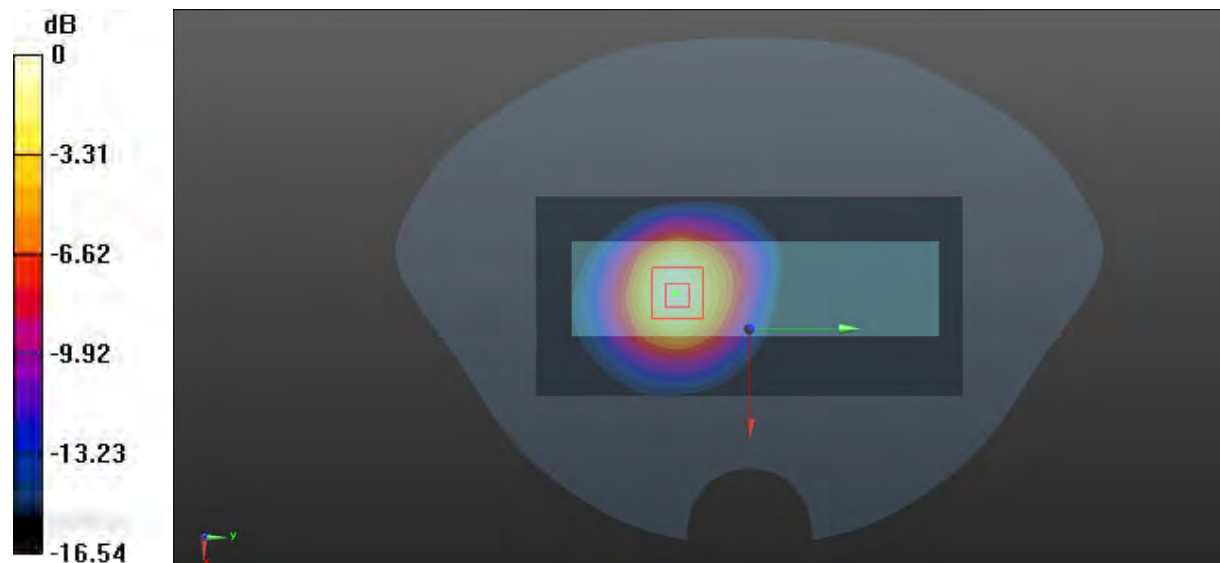

0 dB = 0.867 W/kg = -0.62 dBW/kg

Test Plot30#: SRD 2.4G\_1.4M Chain 1\_Mid\_Body Top

DUT: Remote Controller; Type: EFA; Serial: CR21090095-SA-S1

Communication System: 2.4G SDR; Frequency: 2439.5 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 2439.5$  MHz;  $\sigma = 1.779$  S/m;  $\epsilon_r = 39.157$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(7.44, 7.44, 7.44) @ 2439.5 MHz; Calibrated: 2020/11/30
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2021/9/1
- Phantom: Head model; Type: QD000P40CC; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

**Area Scan (71x151x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.643 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.43 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 0.693 W/kg

**SAR(1 g) = 0.565 W/kg; SAR(10 g) = 0.307 W/kg**

Maximum value of SAR (measured) = 0.602 W/kg

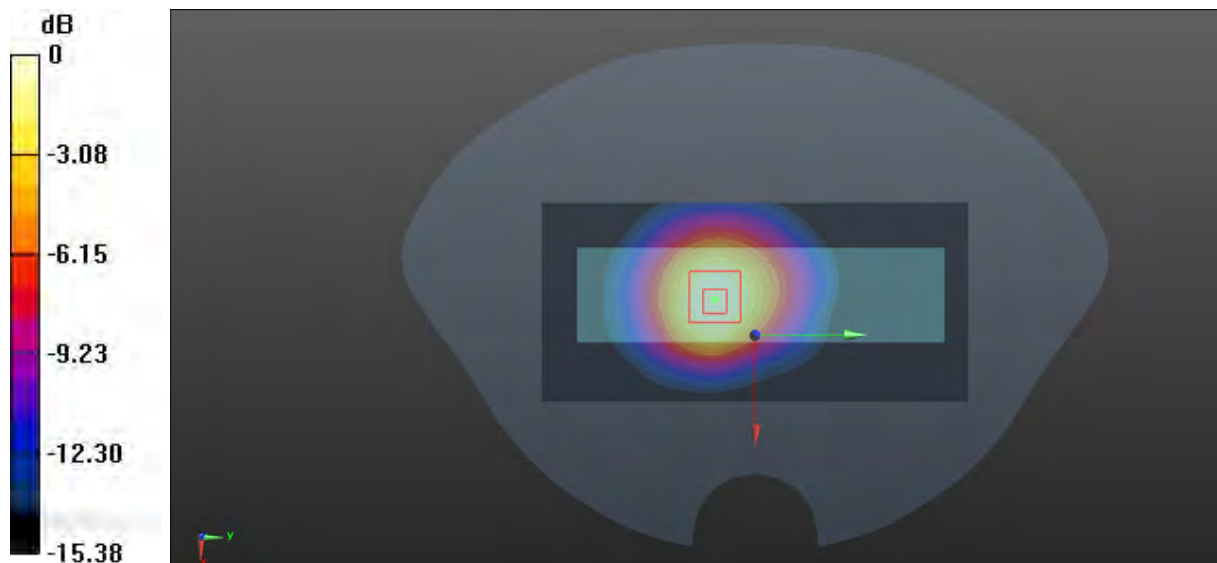

0 dB = 0.602 W/kg = -2.20 dBW/kg

**Test Plot 31#: SRD 2.4G\_1.4M Chain 1\_High\_Body Top****DUT: Remote Controller; Type: EFA; Serial: CR21090095-SA-S1**

Communication System: 2.4G SDR; Frequency: 2475.5 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 2475.5$  MHz;  $\sigma = 1.849$  S/m;  $\epsilon_r = 39.054$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(7.44, 7.44, 7.44) @ 2475.5 MHz; Calibrated: 2020/11/30
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2021/9/1
- Phantom: Head model; Type: QD000P40CC; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

**Area Scan (71x151x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.641 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.637 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 0.837 W/kg

**SAR(1 g) = 0.452 W/kg; SAR(10 g) = 0.235 W/kg**

Maximum value of SAR (measured) = 0.638 W/kg

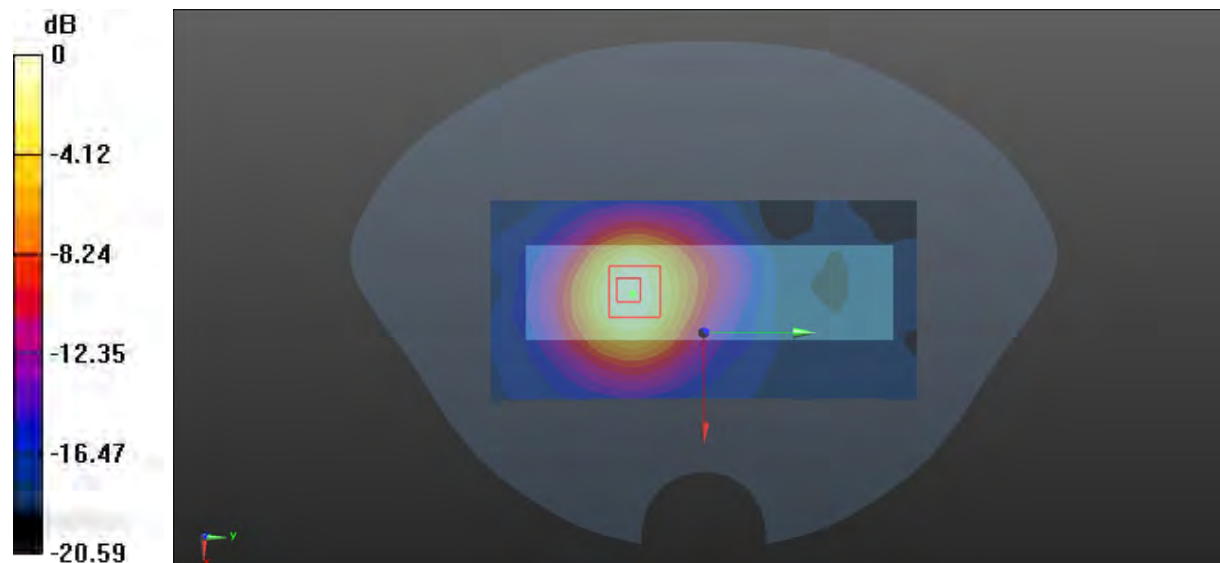

0 dB = 0.638 W/kg = -1.95 dBW/kg

**Test Plot 32#:SRD 2.4G\_20M Chain 1\_Mid\_Body Top****DUT: Remote Controller; Type: EFA; Serial: CR21090095-SA-S1**

Communication System: 2.4G SDR; Frequency: 2437.5 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 2437.5$  MHz;  $\sigma = 1.764$  S/m;  $\epsilon_r = 39.169$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(7.44, 7.44, 7.44) @ 2437.5 MHz; Calibrated: 2020/11/30
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2021/9/1
- Phantom: Head model; Type: QD000P40CC; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

**Area Scan (71x151x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.856 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.326 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 0.968 W/kg

**SAR(1 g) = 0.413 W/kg; SAR(10 g) = 0.230 W/kg**

Maximum value of SAR (measured) = 0.834 W/kg

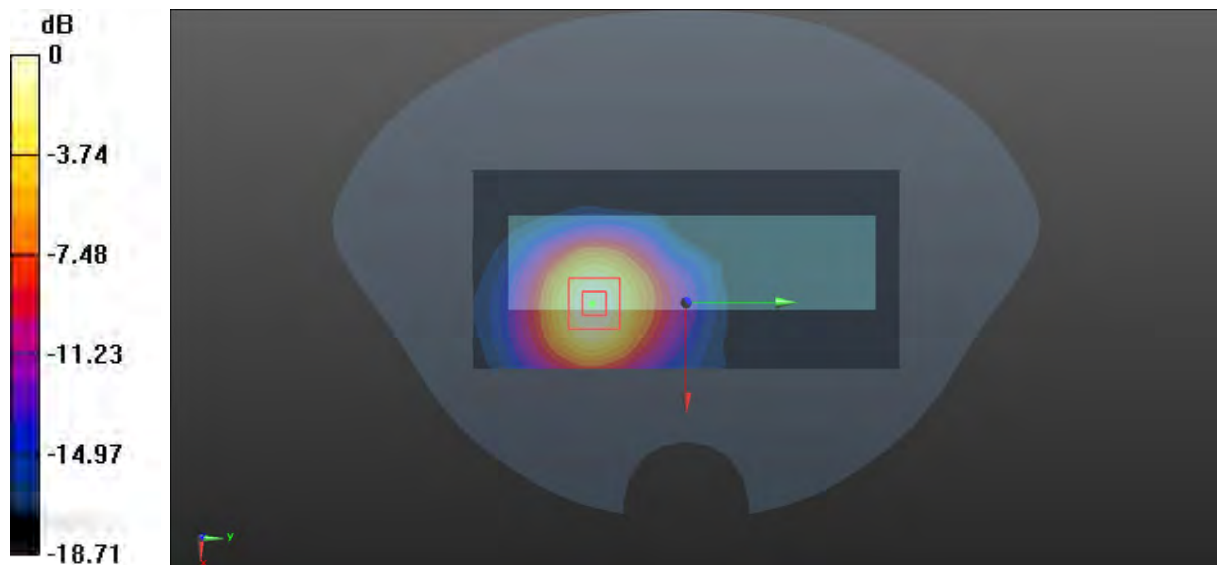

0 dB = 0.834 W/kg = -0.79 dBW/kg



**Test Plot 33#: SRD 5.2G\_1.4M Chain 0\_Mid\_Handheld Back****DUT: Remote Controller; Type: EFA; Serial: CR21090095-SA-S1**

Communication System: 5G SDR; Frequency: 5201 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 5201$  MHz;  $\sigma = 4.667$  S/m;  $\epsilon_r = 36.037$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(5.55, 5.55, 5.55) @ 5201 MHz; Calibrated: 2020/11/30
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2021/9/1
- Phantom: Head model; Type: QD000P40CC; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

**Area Scan (111x151x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.504 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.410 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 0.518 W/kg

**SAR(1 g) = 0.238 W/kg; SAR(10 g) = 0.136 W/kg**

Maximum value of SAR (measured) = 0.383 W/kg

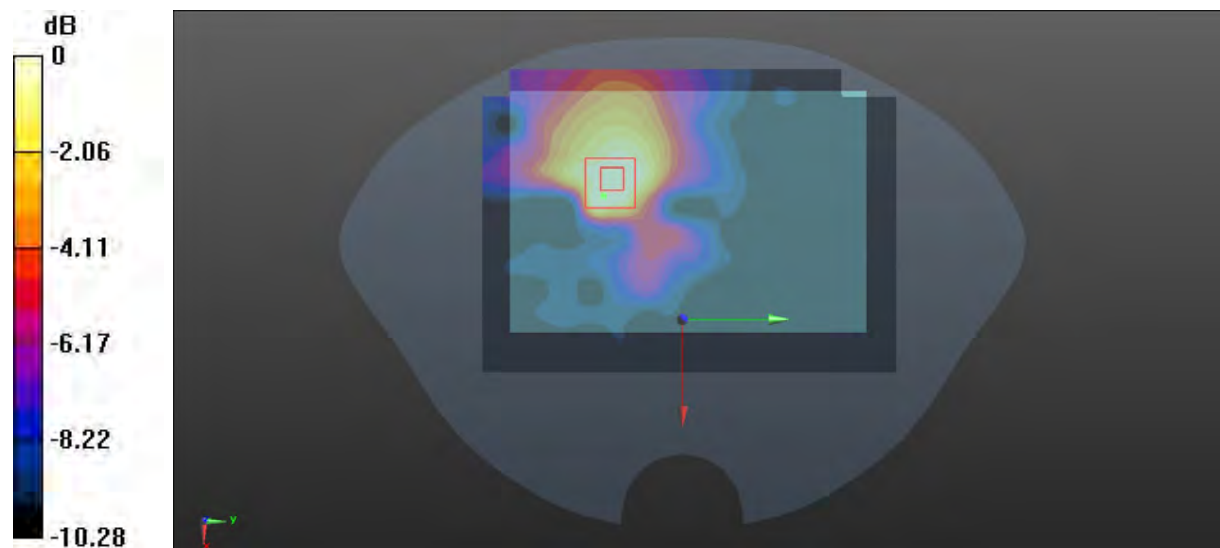

0 dB = 0.383 W/kg = -4.17 dBW/kg

**Test Plot 34#: SRD 5.2G\_1.4M Chain 0\_Mid\_Handheld Front****DUT: Remote Controller; Type: EFA; Serial: CR21090095-SA-S1**

Communication System:5G SDR; Frequency: 5201 MHz;Duty Cycle: 1:1

Medium parameters used:  $f = 5201$  MHz;  $\sigma = 4.667$  S/m;  $\epsilon_r = 36.037$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(5.55, 5.55, 5.55) @ 5201 MHz; Calibrated: 2020/11/30
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2021/9/1
- Phantom: Head model; Type: QD000P40CC; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

**Area Scan (131x181x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.552 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.884 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.761 W/kg

**SAR(1 g) = 0.334 W/kg; SAR(10 g) = 0.180 W/kg**

Maximum value of SAR (measured) = 0.563 W/kg

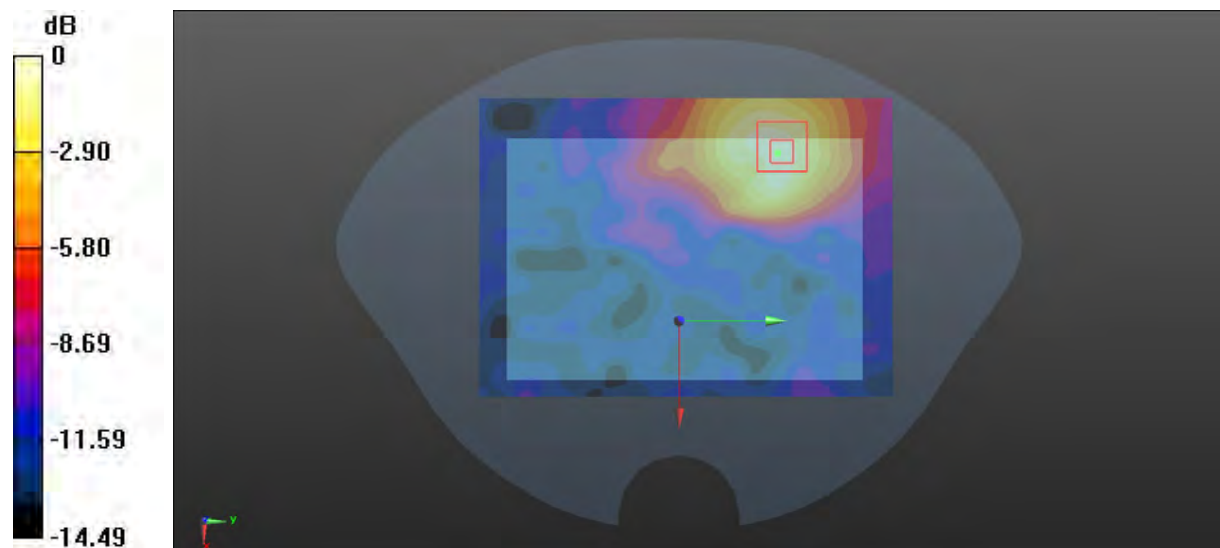

0 dB = 0.563 W/kg = -2.49 dBW/kg

**Test Plot 35#: SRD 5.2G\_1.4M Chain 0\_Mid\_Handheld Left****DUT: Remote Controller; Type: EFA; Serial: CR21090095-SA-S1**

Communication System: 5G SDR; Frequency: 5201 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 5201$  MHz;  $\sigma = 4.667$  S/m;  $\epsilon_r = 36.037$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(5.55, 5.55, 5.55) @ 5201 MHz; Calibrated: 2020/11/30
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2021/9/1
- Phantom: Head model; Type: QD000P40CC; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

**Area Scan (91x151x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.0840 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.551 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 0.108 W/kg

**SAR(1 g) = 0.056 W/kg; SAR(10 g) = 0.042 W/kg**

Maximum value of SAR (measured) = 0.0807 W/kg

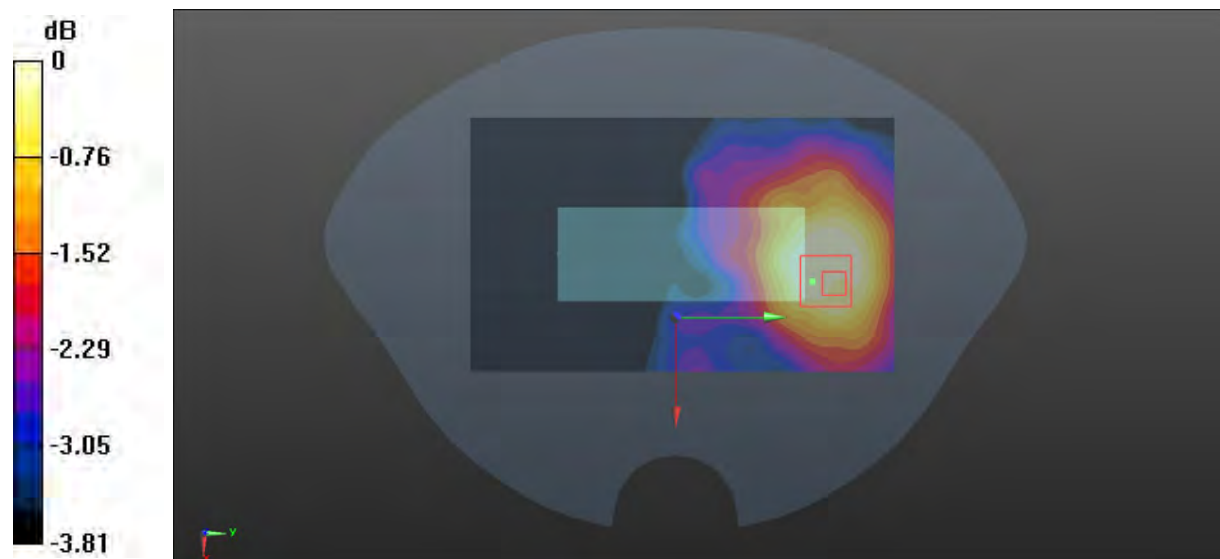

0 dB = 0.0807 W/kg = -10.93 dBW/kg

**Test Plot 36#: SRD 5.2G\_1.4M Chain 0\_Mid\_Handheld Right****DUT: Remote Controller; Type: EFA; Serial: CR21090095-SA-S1**

Communication System: 5G SDR; Frequency: 5201 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 5201$  MHz;  $\sigma = 4.667$  S/m;  $\epsilon_r = 36.037$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(5.55, 5.55, 5.55) @ 5201 MHz; Calibrated: 2020/11/30
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2021/9/1
- Phantom: Head model; Type: QD000P40CC; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

**Area Scan (91x151x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.117 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.717 V/m; Power Drift = -0.19 dB

Peak SAR (extrapolated) = 0.168 W/kg

**SAR(1 g) = 0.076 W/kg; SAR(10 g) = 0.053 W/kg**

Maximum value of SAR (measured) = 0.115 W/kg

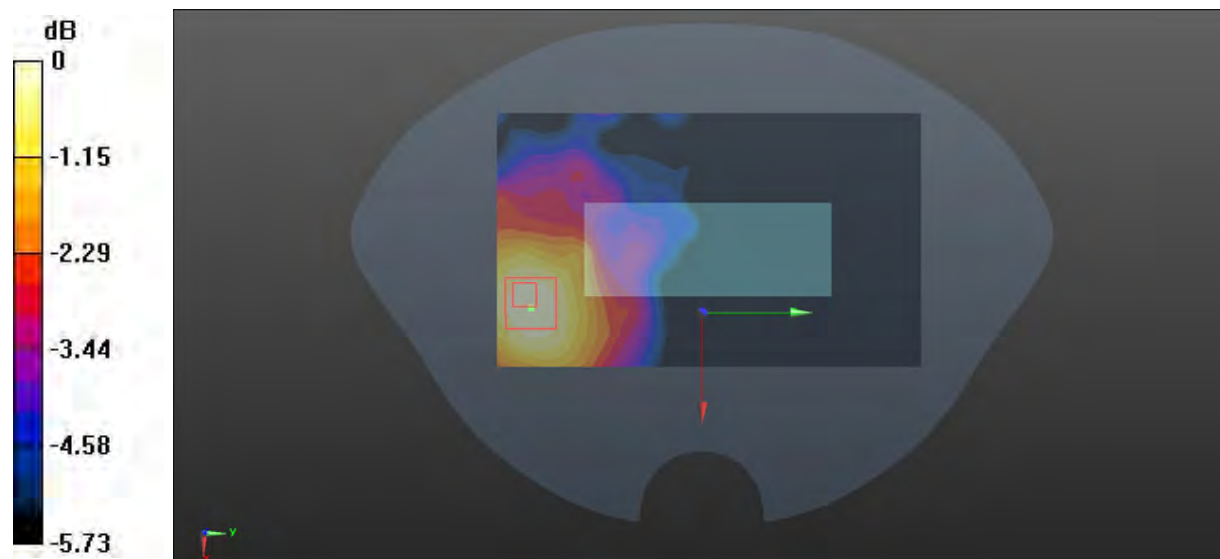

0 dB = 0.115 W/kg = -9.39 dBW/kg

**Test Plot 37#: SRD 5.2G\_1.4M Chain 0\_Low\_Handheld Top****DUT: Remote Controller; Type: EFA; Serial: CR21090095-SA-S1**

Communication System:5.2G SDR; Frequency: 5154 MHz;Duty Cycle: 1:1

Medium parameters used:  $f = 5154$  MHz;  $\sigma = 4.628$  S/m;  $\epsilon_r = 36.244$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(5.55, 5.55, 5.55) @ 5154 MHz; Calibrated: 2020/11/30
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2021/9/1
- Phantom: Head model; Type: QD000P40CC; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

**Area Scan (91x181x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 4.69 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.583 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 5.51 W/kg

**SAR(1 g) = 2.15 W/kg; SAR(10 g) = 0.789 W/kg**

Maximum value of SAR (measured) = 4.24 W/kg

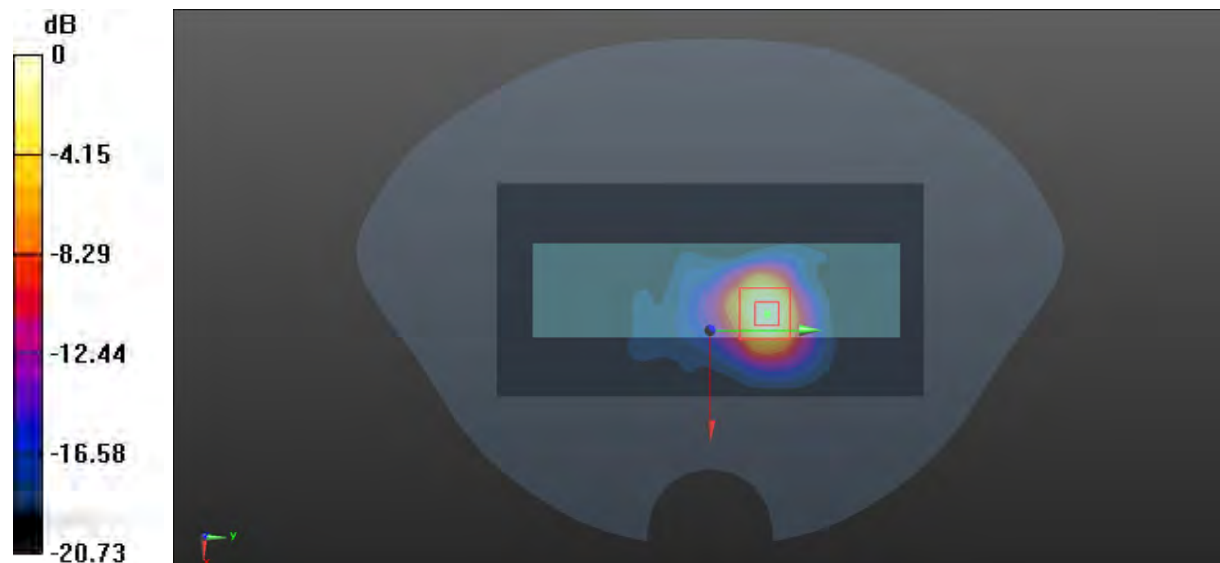

0 dB = 4.24 W/kg = 6.27 dBW/kg

**Test Plot 38#: SRD 5.2G\_1.4M Chain 0\_Mid\_Handheld Top****DUT: Remote Controller; Type: EFA; Serial: CR21090095-SA-S1**

Communication System: 5G SDR; Frequency: 5201 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 5201$  MHz;  $\sigma = 4.667$  S/m;  $\epsilon_r = 36.437$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(5.55, 5.55, 5.55) @ 5201MHz; Calibrated: 2020/11/30
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2021/9/1
- Phantom: Head model; Type: QD000P40CC; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

**Area Scan (91x181x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 6.26 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.281 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 6.94 W/kg

**SAR(1 g) = 2.47 W/kg; SAR(10 g) = 0.851 W/kg**

Maximum value of SAR (measured) = 5.18 W/kg

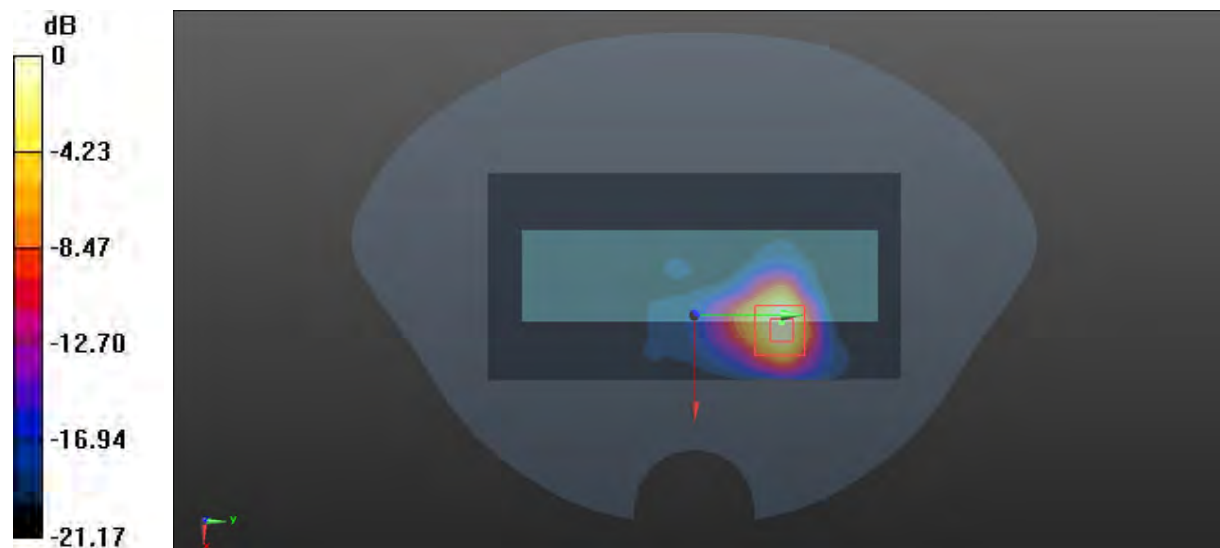

0 dB = 5.18 W/kg = 7.14 dBW/kg

**Test Plot 39#: SRD 5.2G\_1.4M Chain 0\_High\_Handheld Top****DUT: Remote Controller; Type: EFA; Serial: CR21090095-SA-S1**

Communication System: 5.2G SDR; Frequency: 5246 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 5246$  MHz;  $\sigma = 4.703$  S/m;  $\epsilon_r = 35.861$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(5.55, 5.55, 5.55) @ 5246 MHz; Calibrated: 2020/11/30
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2021/9/1
- Phantom: Head model; Type: QD000P40CC; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

**Area Scan (91x181x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 4.64 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.626 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 6.03 W/kg

**SAR(1 g) = 2.27 W/kg; SAR(10 g) = 0.818 W/kg**

Maximum value of SAR (measured) = 4.59 W/kg

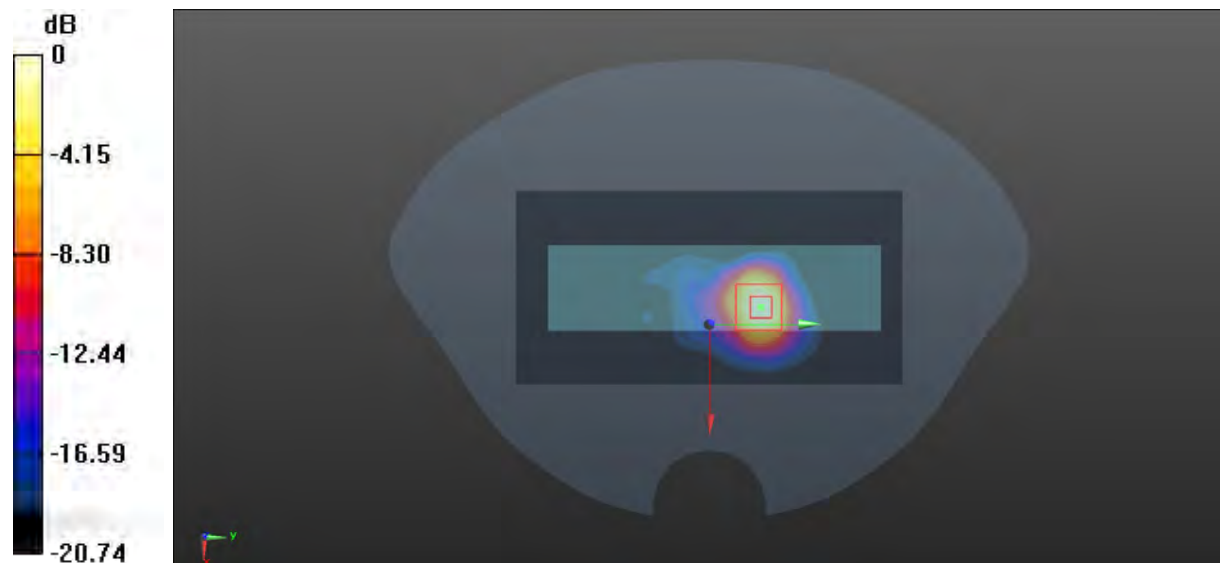

0 dB = 4.59 W/kg = 6.62 dBW/kg

**Test Plot 40#: SRD 5.2G\_20M Chain 0\_Mid\_Handheld Top****DUT: Remote Controller; Type: EFA; Serial: CR21090095-SA-S1**

Communication System: 5G SDR; Frequency: 5201 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 5201$  MHz;  $\sigma = 4.667$  S/m;  $\epsilon_r = 36.037$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(5.55, 5.55, 5.55) @ 5201 MHz; Calibrated: 2020/11/30
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2021/9/1
- Phantom: Head model; Type: QD000P40CC; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

**Area Scan (91x181x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 4.89 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.147 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 6.01 W/kg

**SAR(1 g) = 2.15 W/kg; SAR(10 g) = 0.750 W/kg**

Maximum value of SAR (measured) = 4.45 W/kg

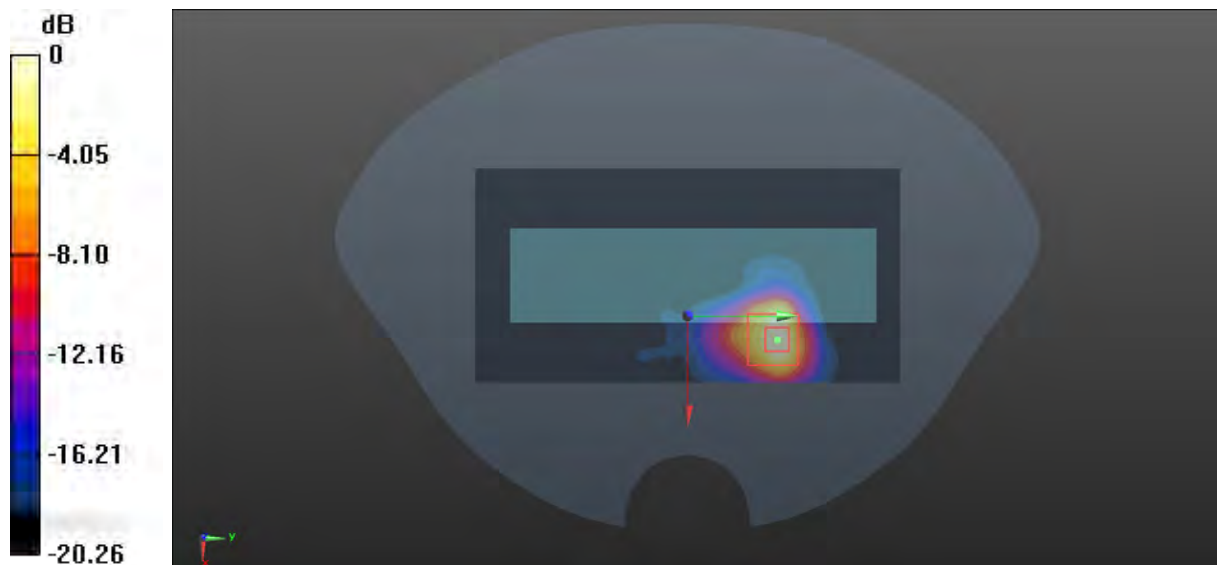

0 dB = 4.45 W/kg = 6.48 dBW/kg



**Test Plot 41#: SRD 5.2G\_1.4M Chain 0\_Mid\_Body Back****DUT: Remote Controller; Type: EFA; Serial: CR21090095-SA-S1**

Communication System: 5G SDR; Frequency: 5201 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 5201$  MHz;  $\sigma = 4.667$  S/m;  $\epsilon_r = 36.037$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(5.55, 5.55, 5.55) @ 5201 MHz; Calibrated: 2020/11/30
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2021/9/1
- Phantom: Head model; Type: QD000P40CC; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

**Area Scan (131x181x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.172 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.673 V/m; Power Drift = -0.18 dB

Peak SAR (extrapolated) = 0.209 W/kg

**SAR(1 g) = 0.120 W/kg; SAR(10 g) = 0.083 W/kg**

Maximum value of SAR (measured) = 0.170 W/kg

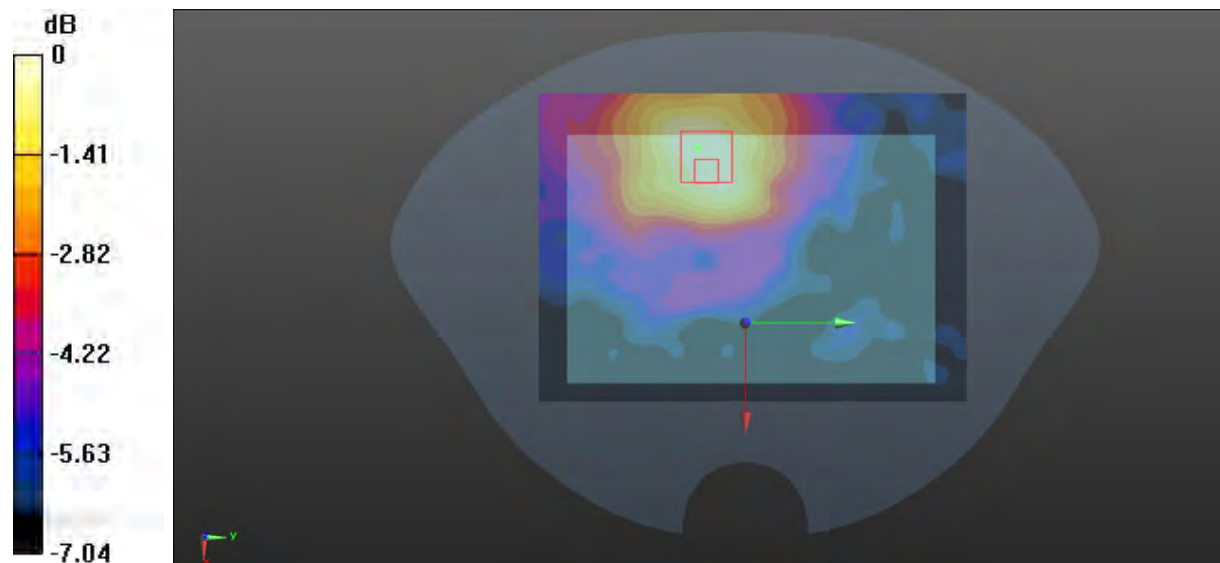

0 dB = 0.170 W/kg = -7.70 dBW/kg

**Test Plot 42#: SRD 5.2G\_1.4M Chain 0\_Mid\_Body Front****DUT: Remote Controller; Type: EFA; Serial: CR21090095-SA-S1**

Communication System: 5G SDR; Frequency: 5201 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 5201$  MHz;  $\sigma = 4.667$  S/m;  $\epsilon_r = 36.037$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(5.55, 5.55, 5.55) @ 5201 MHz; Calibrated: 2020/11/30
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2021/9/1
- Phantom: Head model; Type: QD000P40CC; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

**Area Scan (131x181x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.158 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.678 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.296 W/kg

**SAR(1 g) = 0.093 W/kg; SAR(10 g) = 0.068 W/kg.**

Maximum value of SAR (measured) = 0.155 W/kg

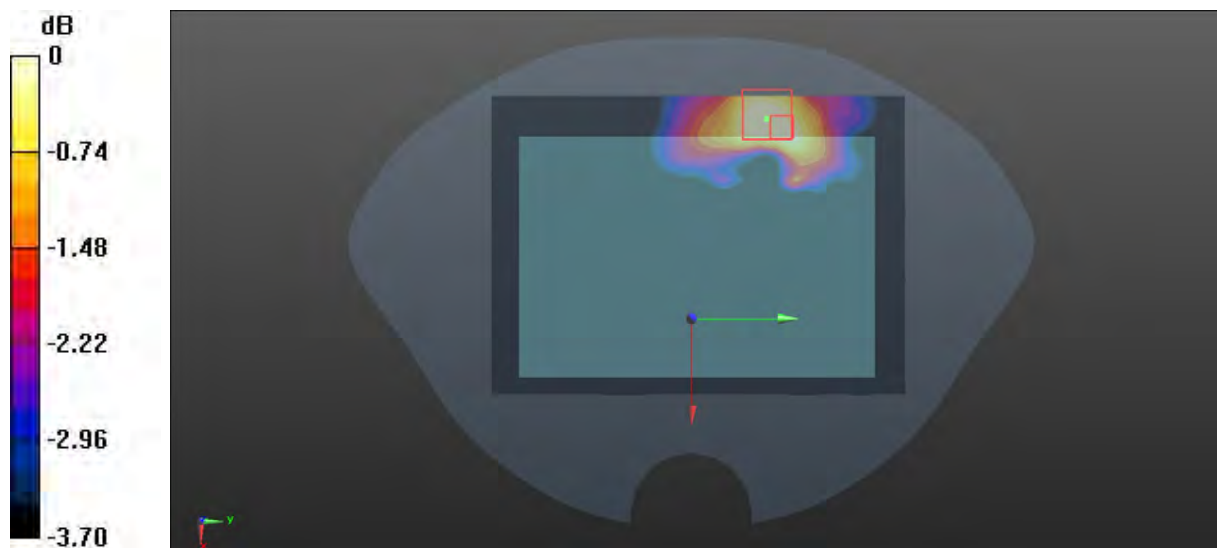

0 dB = 0.155 W/kg = -8.10 dBW/kg

**Test Plot 43#: SRD 5.2G\_1.4M Chain 0\_Mid\_Body Left****DUT: Remote Controller; Type: EFA; Serial: CR21090095-SA-S1**

Communication System: 5G SDR; Frequency: 5201 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 5201$  MHz;  $\sigma = 4.667$  S/m;  $\epsilon_r = 36.037$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(5.55, 5.55, 5.55) @ 5201 MHz; Calibrated: 2020/11/30
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2021/9/1
- Phantom: Head model; Type: QD000P40CC; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

**Area Scan (91x151x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.118 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.104 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 0.140 W/kg

**SAR(1 g) = 0.078 W/kg; SAR(10 g) = 0.052 W/kg**

Maximum value of SAR (measured) = 0.118 W/kg

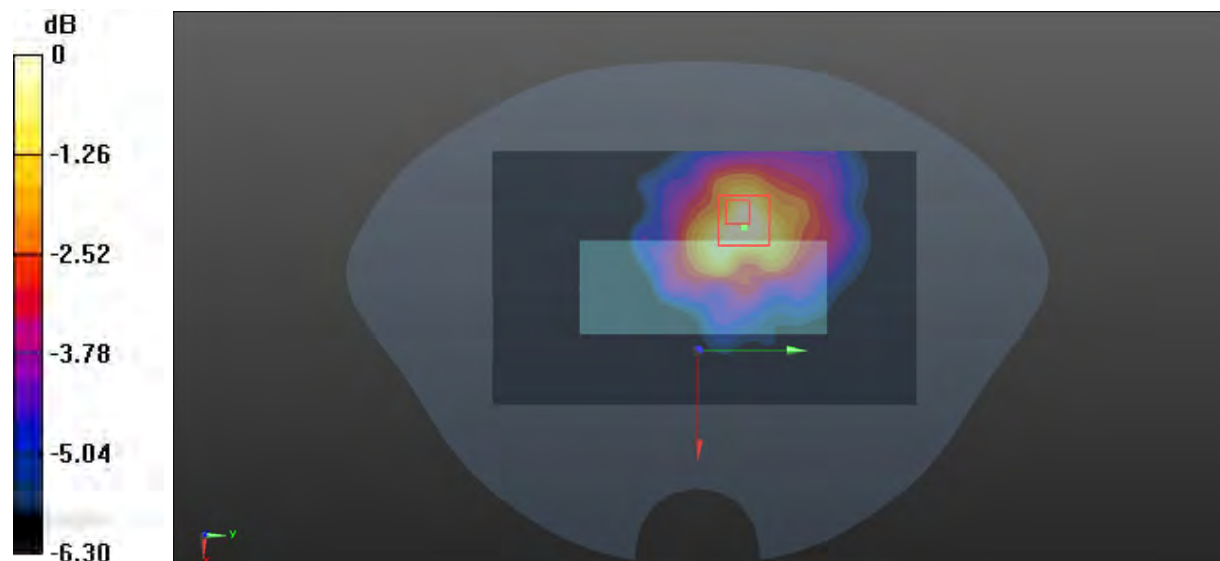

0 dB = 0.118 W/kg = -9.28 dBW/kg

**Test Plot 44#: SRD 5.2G\_1.4M Chain 0\_Mid\_Body Right****DUT: Remote Controller; Type: EFA; Serial: CR21090095-SA-S1**

Communication System: 5G SDR; Frequency: 5201 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 5201$  MHz;  $\sigma = 4.667$  S/m;  $\epsilon_r = 36.037$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(5.55, 5.55, 5.55) @ 5201 MHz; Calibrated: 2020/11/30
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2021/9/1
- Phantom: Head model; Type: QD000P40CC; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

**Area Scan (91x151x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.139 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.506 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 0.164 W/kg

**SAR(1 g) = 0.088 W/kg; SAR(10 g) = 0.057 W/kg**

Maximum value of SAR (measured) = 0.136 W/kg

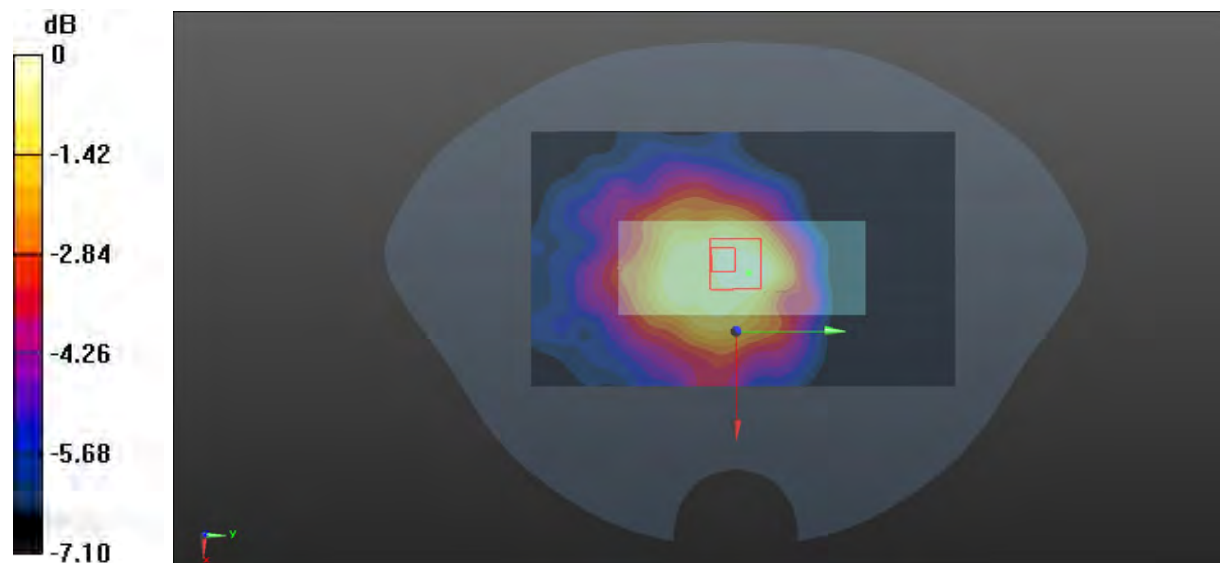

0 dB = 0.136 W/kg = -8.66 dBW/kg

**Test Plot 45#: SRD 5.2G\_1.4M Chain 0\_Low\_Body Top****DUT: Remote Controller; Type: EFA; Serial: CR21090095-SA-S1**

Communication System: 5G SDR; Frequency: 5154 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 5154$  MHz;  $\sigma = 4.628$  S/m;  $\epsilon_r = 36.244$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(5.55, 5.55, 5.55) @ 5154 MHz; Calibrated: 2020/11/30
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2021/9/1
- Phantom: Head model; Type: QD000P40CC; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

**Area Scan (91x181x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.222 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.669 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.256 W/kg

**SAR(1 g) = 0.138 W/kg; SAR(10 g) = 0.077 W/kg**

Maximum value of SAR (measured) = 0.213 W/kg

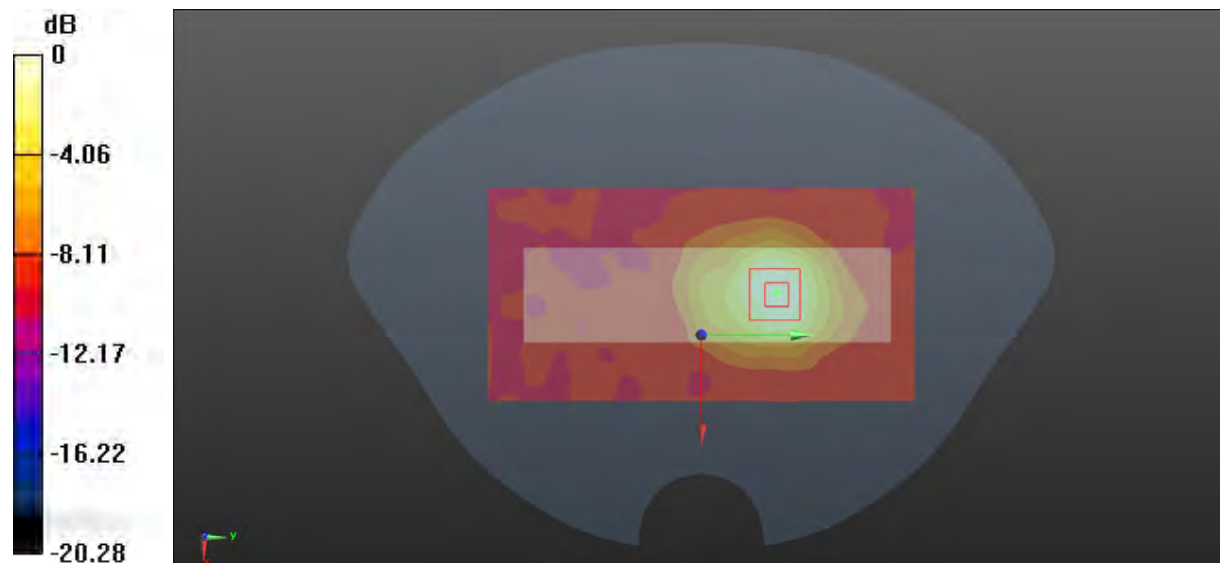

0 dB = 0.213 W/kg = -6.72 dBW/kg

**Test Plot 46#:SRD 5.2G\_1.4M Chain 0\_Mid\_Body Top****DUT: Remote Controller; Type: EFA; Serial: CR21090095-SA-S1**

Communication System: 5G SDR; Frequency: 5201 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 5201$  MHz;  $\sigma = 4.667$  S/m;  $\epsilon_r = 36.037$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(5.55, 5.55, 5.55) @ 5201 MHz; Calibrated: 2020/11/30
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2021/9/1
- Phantom: Head model; Type: QD000P40CC; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

**Area Scan (91x181x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.301 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.252 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.383 W/kg

**SAR(1 g) = 0.183 W/kg; SAR(10 g) = 0.100 W/kg.**

Maximum value of SAR (measured) = 0.294 W/kg

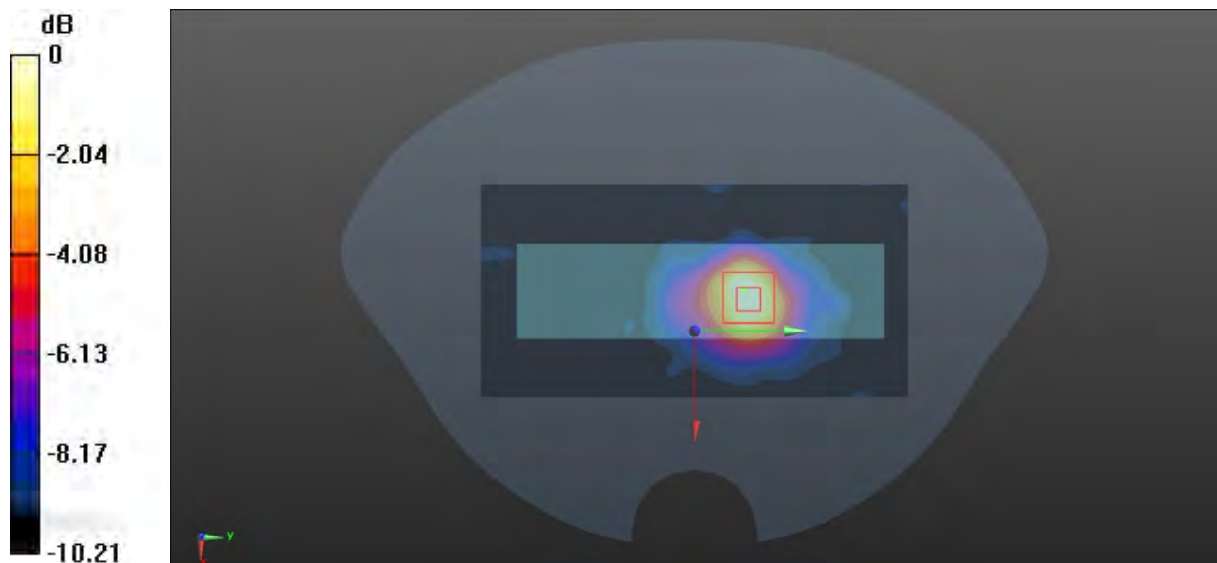

0 dB = 0.294 W/kg = -5.32 dBW/kg

**Test Plot 47#:SRD 5.2G\_1.4M Chain 0\_High\_Body Top****DUT: Remote Controller; Type: EFA; Serial: CR21090095-SA-S1**

Communication System: 5G SDR; Frequency: 5246 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 5246$  MHz;  $\sigma = 4.7035$  S/m;  $\epsilon_r = 35.861$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(5.55, 5.55, 5.55) @ 5246 MHz; Calibrated: 2020/11/30
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2021/9/1
- Phantom: Head model; Type: QD000P40CC; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

**Area Scan (91x181x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.220 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.153 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 0.272 W/kg

**SAR(1 g) = 0.145 W/kg; SAR(10 g) = 0.086 W/kg**

Maximum value of SAR (measured) = 0.229 W/kg

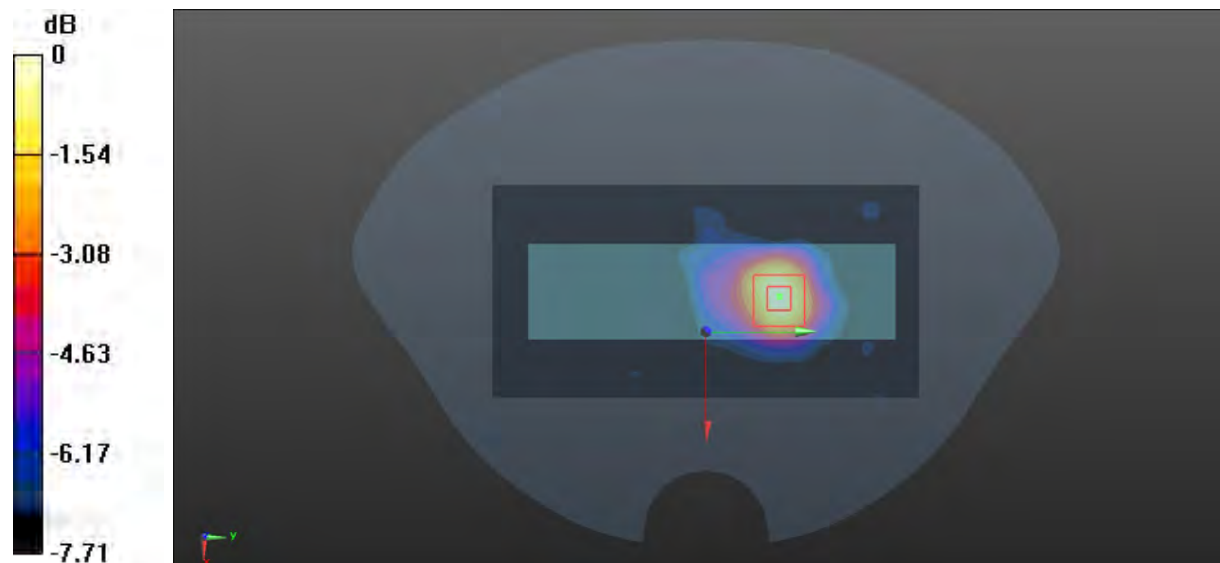

0 dB = 0.229 W/kg = -6.40 dBW/kg

**Test Plot 48#:SRD 5.2G\_20M Chain 0\_Mid\_Body Top****DUT: Remote Controller; Type: EFA; Serial: CR21090095-SA-S1**

Communication System: 5G SDR; Frequency: 5201 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 5201$  MHz;  $\sigma = 4.667$  S/m;  $\epsilon_r = 36.037$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(5.55, 5.55, 5.55) @ 5201 MHz; Calibrated: 2020/11/30
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2021/9/1
- Phantom: Head model; Type: QD000P40CC; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

**Area Scan (91x181x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.184 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.231 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 0.217 W/kg

**SAR(1 g) = 0.120 W/kg; SAR(10 g) = 0.069 W/kg**

Maximum value of SAR (measured) = 0.184 W/kg

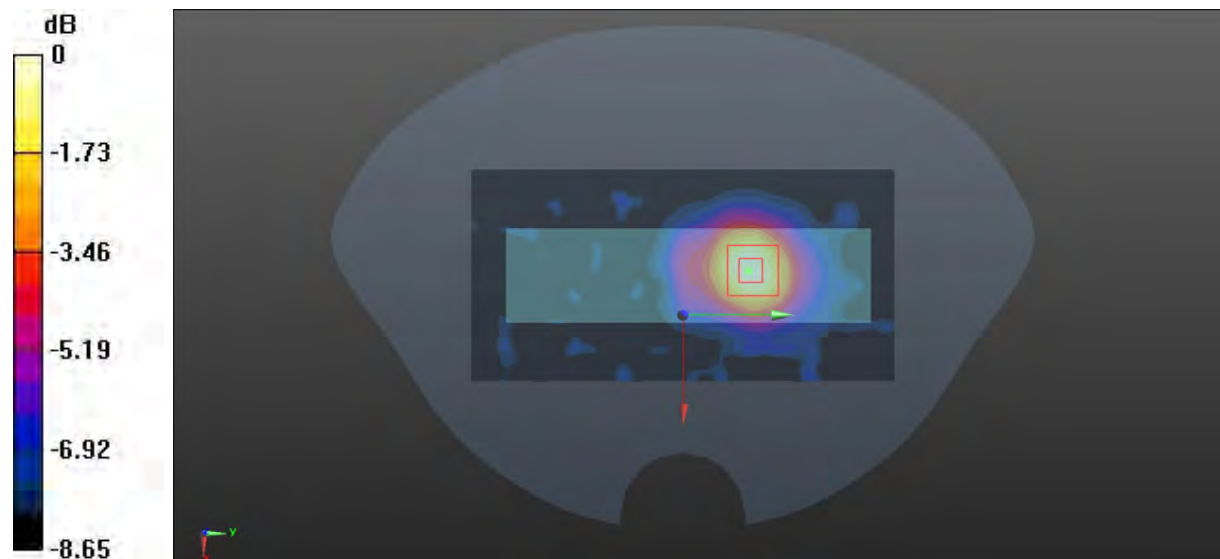

0 dB = 0.184 W/kg = -7.35 dBW/kg



**Test Plot 49#: SRD 5.2G\_1.4M Chain 1\_Mid\_Handheld Back****DUT: Remote Controller; Type: EFA; Serial: CR21090095-SA-S1**

Communication System: 5G SDR; Frequency: 5201 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 5201$  MHz;  $\sigma = 4.667$  S/m;  $\epsilon_r = 36.037$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(5.55, 5.55, 5.55) @ 5201 MHz; Calibrated: 2020/11/30
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2021/9/1
- Phantom: Head model; Type: QD000P40CC; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

**Area Scan (111x151x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.292 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.988 V/m; Power Drift =0.08 dB

Peak SAR (extrapolated) = 0.413 W/kg

**SAR(1 g) = 0.200 W/kg; SAR(10 g) = 0.118 W/kg**

Maximum value of SAR (measured) = 0.321 W/kg



0 dB = 0.321 W/kg = -4.93 dBW/kg

**Test Plot 50#: SRD 5.2G\_1.4M Chain 1\_Mid\_Handheld Front****DUT: Remote Controller; Type: EFA; Serial: CR21090095-SA-S1**

Communication System: 5G SDR; Frequency: 5201 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 5201$  MHz;  $\sigma = 4.667$  S/m;  $\epsilon_r = 36.037$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(5.55, 5.55, 5.55) @ 5201 MHz; Calibrated: 2020/11/30
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2021/9/1
- Phantom: Head model; Type: QD000P40CC; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

**Area Scan (131x181x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.542 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.756 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.617 W/kg

**SAR(1 g) = 0.296 W/kg; SAR(10 g) = 0.157 W/kg**

Maximum value of SAR (measured) = 0.500 W/kg

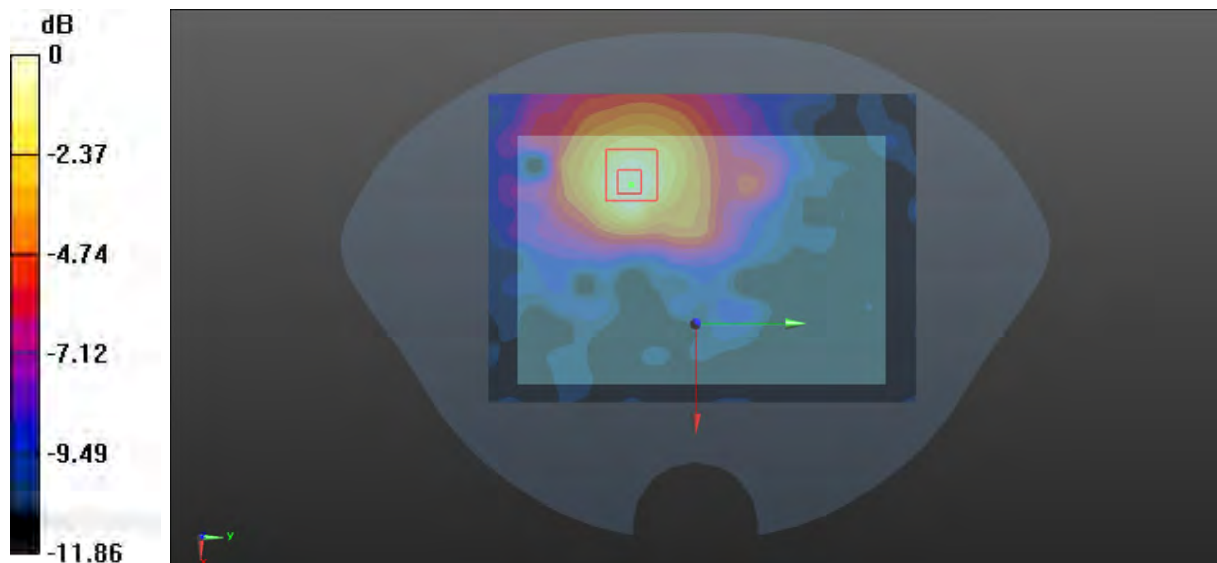

0 dB = 0.500 W/kg = -3.01 dBW/kg

**Test Plot 51#: SRD 5.2G\_1.4M Chain 1\_Mid\_Handheld Left****DUT: Remote Controller; Type: EFA; Serial: CR21090095-SA-S1**

Communication System: 5G SDR; Frequency: 5201 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 5201$  MHz;  $\sigma = 4.667$  S/m;  $\epsilon_r = 36.037$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(5.55, 5.55, 5.55) @ 5201 MHz; Calibrated: 2020/11/30
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2021/9/1
- Phantom: Head model; Type: QD000P40CC; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

**Area Scan (101x181x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 2.11 W/kg


**Zoom Scan (7x7x16)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=2mm

Reference Value = 6.358 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 2.54 W/kg

**SAR(1 g) = 1.11 W/kg; SAR(10 g) = 0.433 W/kg**

Maximum value of SAR (measured) = 2.10 W/kg

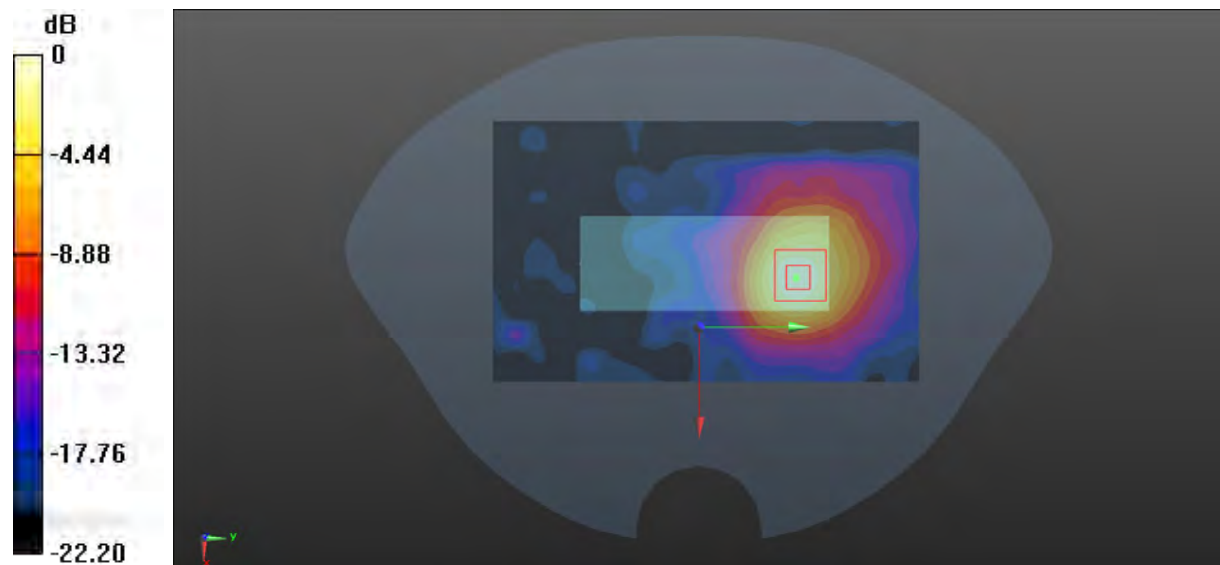

0 dB = 2.10 W/kg = 3.22 dBW/kg

**Test Plot 52#: SRD 5.2G\_1.4M Chain 1\_Mid\_Handheld Right****DUT: Remote Controller; Type: EFA; Serial: CR21090095-SA-S1**

Communication System: 5G SDR; Frequency: 5201 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 5201$  MHz;  $\sigma = 4.667$  S/m;  $\epsilon_r = 36.037$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(5.55, 5.55, 5.55) @ 5201 MHz; Calibrated: 2020/11/30
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2021/9/1
- Phantom: Head model; Type: QD000P40CC; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

**Area Scan (91x151x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.138 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.021 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.159 W/kg

**SAR(1 g) = 0.088 W/kg; SAR(10 g) = 0.056 W/kg**

Maximum value of SAR (measured) = 0.130 W/kg

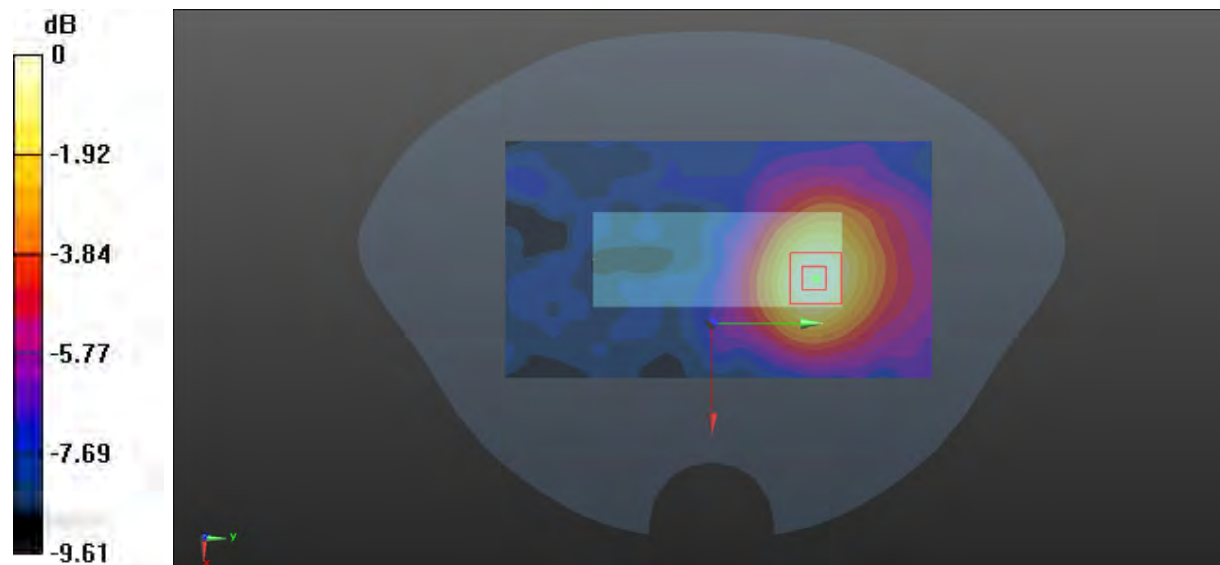

0 dB = 0.130 W/kg = -8.86 dBW/kg

**Test Plot 53#: SRD 5.2G\_1.4M Chain 1\_Low\_Handheld Top****DUT: Remote Controller; Type: EFA; Serial: CR21090095-SA-S1**

Communication System: 5G SDR; Frequency: 5154 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 5154$  MHz;  $\sigma = 4.628$  S/m;  $\epsilon_r = 36.244$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(5.55, 5.55, 5.55) @ 5154 MHz; Calibrated: 2020/11/30
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2021/9/1
- Phantom: Head model; Type: QD000P40CC; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

**Area Scan (91x181x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 5.08 W/kg


**Zoom Scan (7x7x16)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=2mm

Reference Value = 3.547 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 5.37 W/kg

**SAR(1 g) = 2.43 W/kg; SAR(10 g) = 0.911 W/kg**

Maximum value of SAR (measured) = 4.71 W/kg

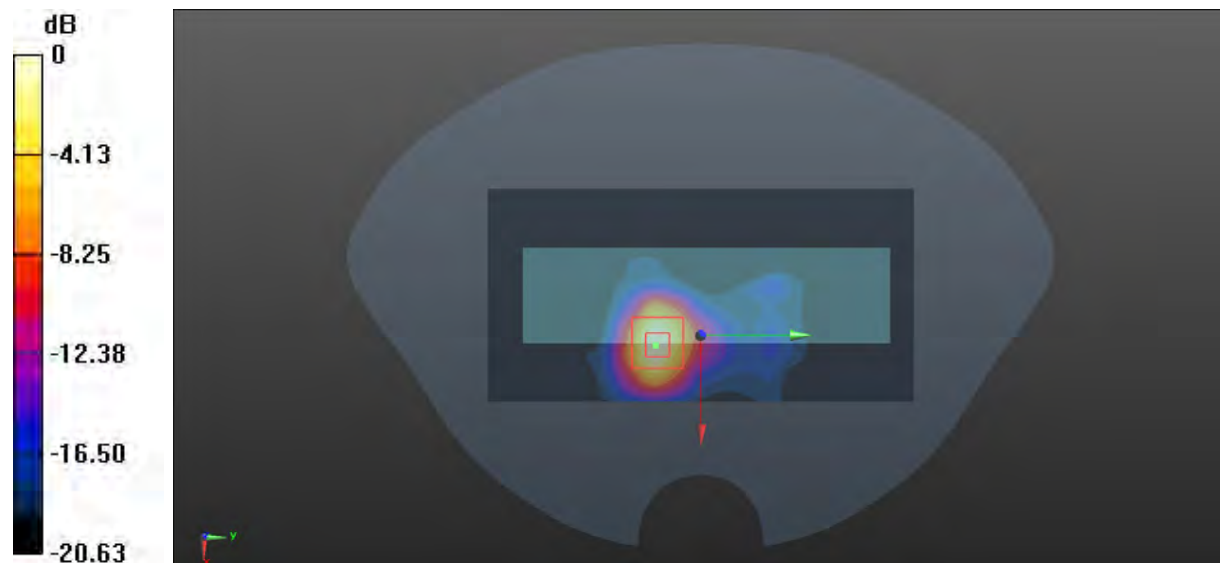

0 dB = 4.71 W/kg = 6.73 dBW/kg

**Test Plot 54#: SRD 5.2G\_1.4M Chain 1\_Mid\_Handheld Top****DUT: Remote Controller; Type: EFA; Serial: CR21090095-SA-S1**

Communication System: 5G SDR; Frequency: 5201 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 5201$  MHz;  $\sigma = 4.667$  S/m;  $\epsilon_r = 36.037$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(5.55, 5.55, 5.55) @ 5201 MHz; Calibrated: 2020/11/30
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2021/9/1
- Phantom: Head model; Type: QD000P40CC; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

**Area Scan (91x181x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 3.74 W/kg


**Zoom Scan (7x7x16)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=2mm

Reference Value = 2.251 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 3.99 W/kg

**SAR(1 g) = 2.21 W/kg; SAR(10 g) = 0.826 W/kg**

Maximum value of SAR (measured) = 3.33 W/kg

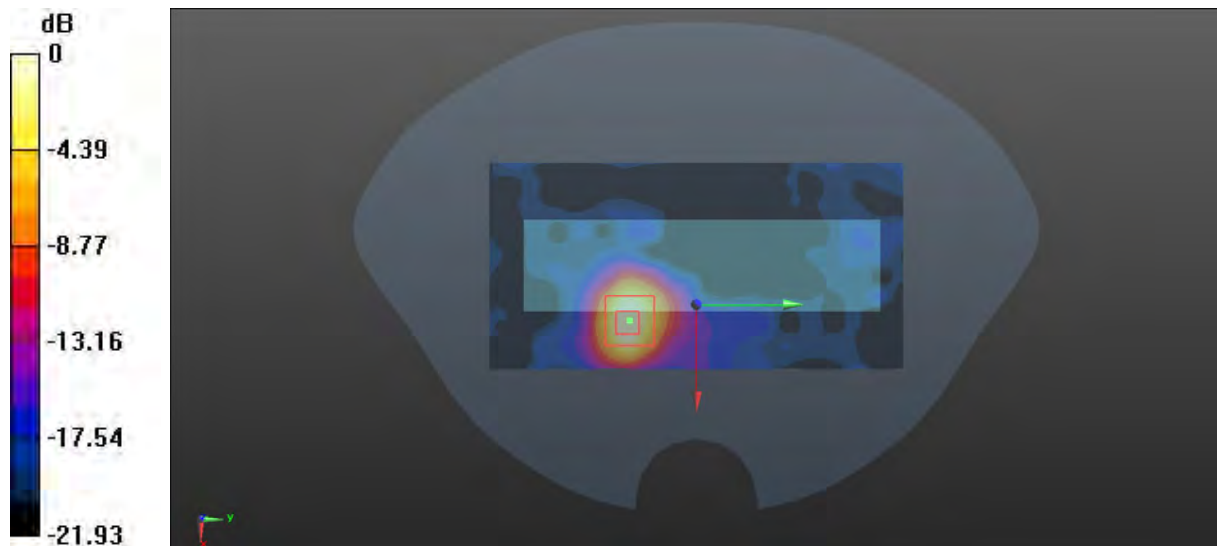

0 dB = 3.33 W/kg = 5.22 dBW/kg

**Test Plot 55#: SRD 5.2G\_1.4M Chain 1\_High\_Handheld Top****DUT: Remote Controller; Type: EFA; Serial: CR21090095-SA-S1**

Communication System: 5G SDR; Frequency: 5246 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 5246$  MHz;  $\sigma = 4.703$  S/m;  $\epsilon_r = 35.861$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(5.55, 5.55, 5.55) @ 5246 MHz; Calibrated: 2020/11/30
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2021/9/1
- Phantom: Head model; Type: QD000P40CC; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

**Area Scan (91x181x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 5.19 W/kg


**Zoom Scan (7x7x16)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=2mm

Reference Value = 3.757 V/m; Power Drift = 0.20 dB

Peak SAR (extrapolated) = 6.04 W/kg

**SAR(1 g) = 2.69 W/kg; SAR(10 g) = 0.987 W/kg**

Maximum value of SAR (measured) = 5.27 W/kg

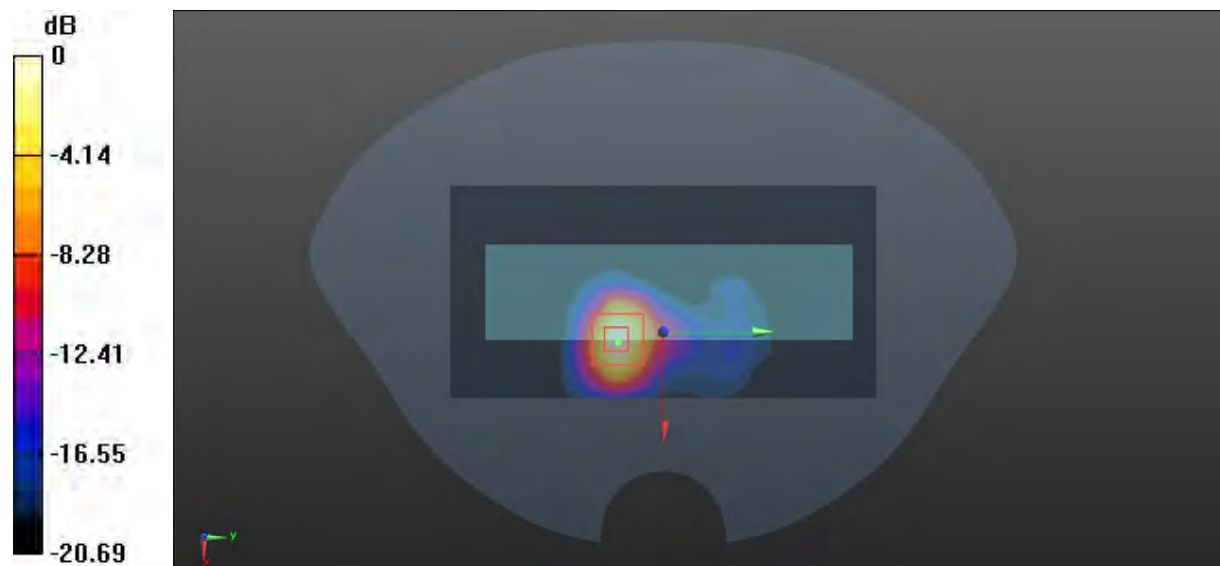

0 dB = 5.27 W/kg = 7.22 dBW/kg

**Test Plot 56#: SRD 5.2G\_20M Chain 1\_Mid\_Handheld Top****DUT: Remote Controller; Type: EFA; Serial: CR21090095-SA-S1**

Communication System: 5G SDR; Frequency: 5201 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 5201$  MHz;  $\sigma = 4.667$  S/m;  $\epsilon_r = 36.037$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(5.55, 5.55, 5.55) @ 5201 MHz; Calibrated: 2020/11/30
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2021/9/1
- Phantom: Head model; Type: QD000P40CC; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

**Area Scan (91x181x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 4.50 W/kg


**Zoom Scan (7x7x16)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=2mm

Reference Value = 9.299 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 5.00 W/kg

**SAR(1 g) = 1.74 W/kg; SAR(10 g) = 0.653 W/kg**

Maximum value of SAR (measured) = 4.32 W/kg

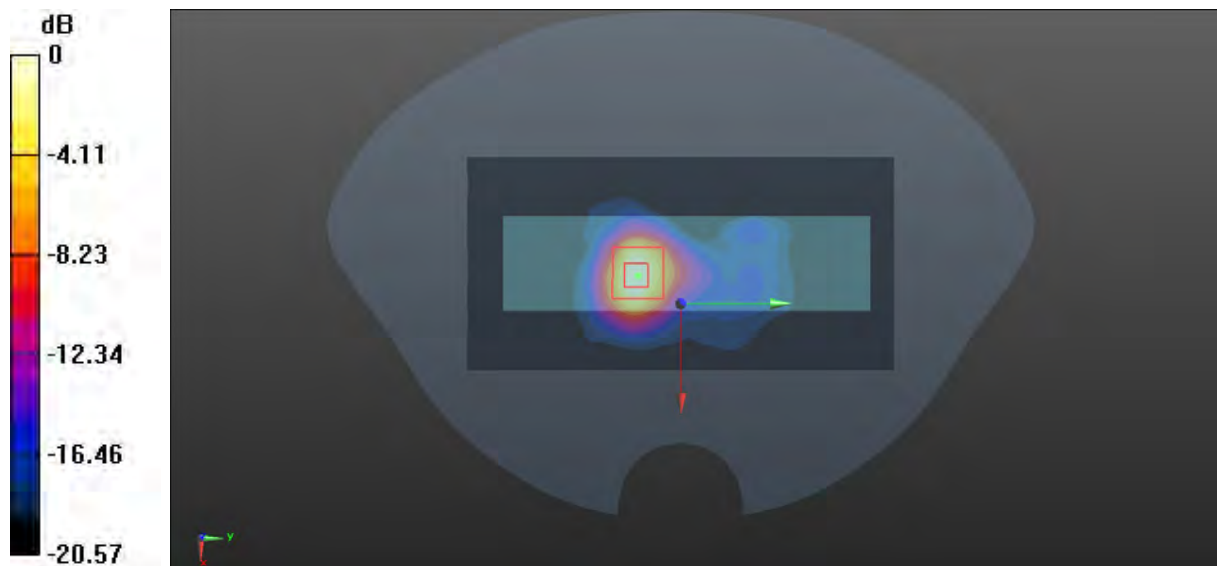

0 dB = 4.32 W/kg = 6.35 dBW/kg



**Test Plot 57#: SRD 5.2G\_1.4M Chain 1\_Mid\_Body Back****DUT: Remote Controller; Type: EFA; Serial: CR21090095-SA-S1**

Communication System: 5G SDR; Frequency: 5201 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 5201$  MHz;  $\sigma = 4.667$  S/m;  $\epsilon_r = 36.037$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(5.55, 5.55, 5.55) @ 5201 MHz; Calibrated: 2020/11/30
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2021/9/1
- Phantom: Head model; Type: QD000P40CC; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

**Area Scan (131x181x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.188 W/kg


**Zoom Scan (7x7x16)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=2mm

Reference Value = 1.546 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.261 W/kg

**SAR(1 g) = 0.143 W/kg; SAR(10 g) = 0.090 W/kg**

Maximum value of SAR (measured) = 0.215 W/kg

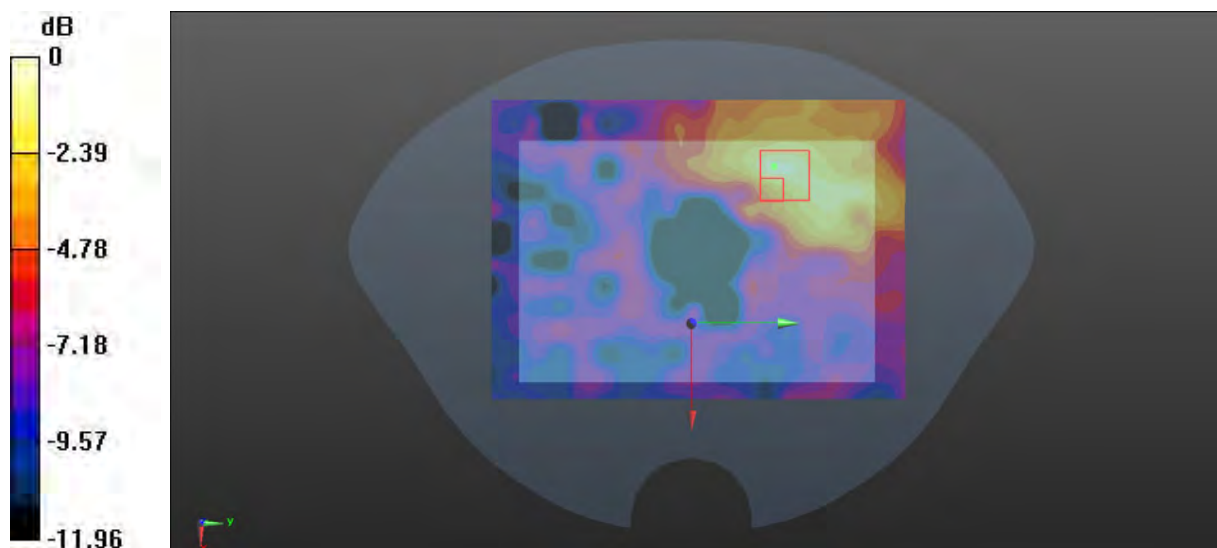

0 dB = 0.215 W/kg = -6.68 dBW/kg

**Test Plot 58#: SRD 5.2G\_1.4M Chain 1\_Mid\_Body Front****DUT: Remote Controller; Type: EFA; Serial: CR21090095-SA-S1**

Communication System: 5G SDR; Frequency: 5201 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 5201$  MHz;  $\sigma = 4.667$  S/m;  $\epsilon_r = 36.037$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(5.55, 5.55, 5.55) @ 5201 MHz; Calibrated: 2020/11/30
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2021/9/1
- Phantom: Head model; Type: QD000P40CC; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

**Area Scan (131x181x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.184 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.210 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 0.219 W/kg

**SAR(1 g) = 0.128 W/kg; SAR(10 g) = 0.082 W/kg**

Maximum value of SAR (measured) = 0.182 W/kg

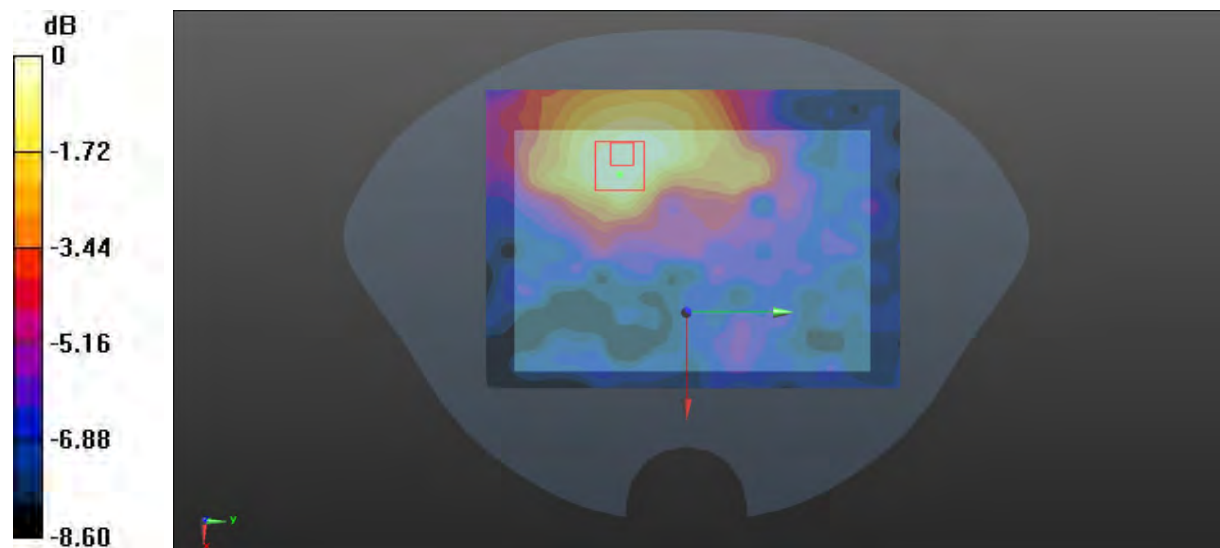

0 dB = 0.182 W/kg = -7.40 dBW/kg

**Test Plot 59#: SRD 5.2G\_1.4M Chain 1\_Mid\_Body Left****DUT: Remote Controller; Type: EFA; Serial: CR21090095-SA-S1**

Communication System: 5G SDR; Frequency: 5201 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 5201$  MHz;  $\sigma = 4.667$  S/m;  $\epsilon_r = 36.037$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(5.55, 5.55, 5.55) @ 5201 MHz; Calibrated: 2020/11/30
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2021/9/1
- Phantom: Head model; Type: QD000P40CC; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

**Area Scan (101x181x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.183 W/kg


**Zoom Scan (7x7x16)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=2mm

Reference Value = 2.749 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 0.202 W/kg

**SAR(1 g) = 0.118 W/kg; SAR(10 g) = 0.071 W/kg**

Maximum value of SAR (measured) = 0.175 W/kg

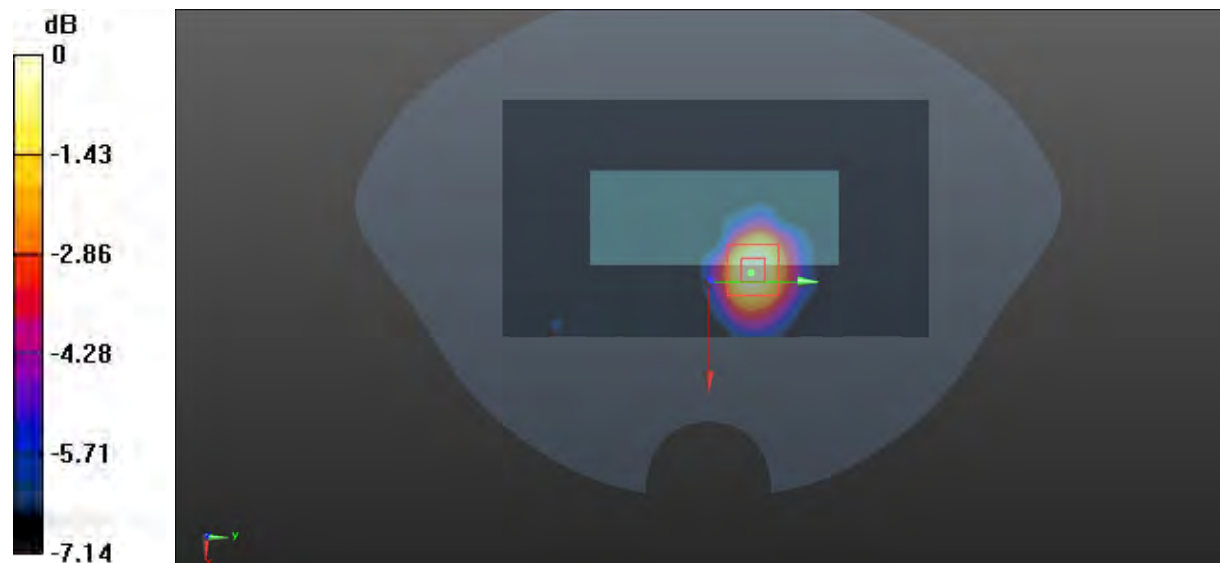

0 dB = 0.175 W/kg = -7.57 dBW/kg

**Test Plot 60#: SRD 5.2G\_1.4M Chain 1\_Mid\_Body Right****DUT: Remote Controller; Type: EFA; Serial: CR21090095-SA-S1**

Communication System: 5G SDR; Frequency: 5201 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 5201$  MHz;  $\sigma = 4.667$  S/m;  $\epsilon_r = 36.037$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(5.55, 5.55, 5.55) @ 5201 MHz; Calibrated: 2020/11/30
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2021/9/1
- Phantom: Head model; Type: QD000P40CC; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

**Area Scan (101x181x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.0833 W/kg


**Zoom Scan (7x7x16)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=2mm

Reference Value = 2.614 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.159 W/kg

**SAR(1 g) = 0.063 W/kg; SAR(10 g) = 0.050 W/kg**

Maximum value of SAR (measured) = 0.0826 W/kg

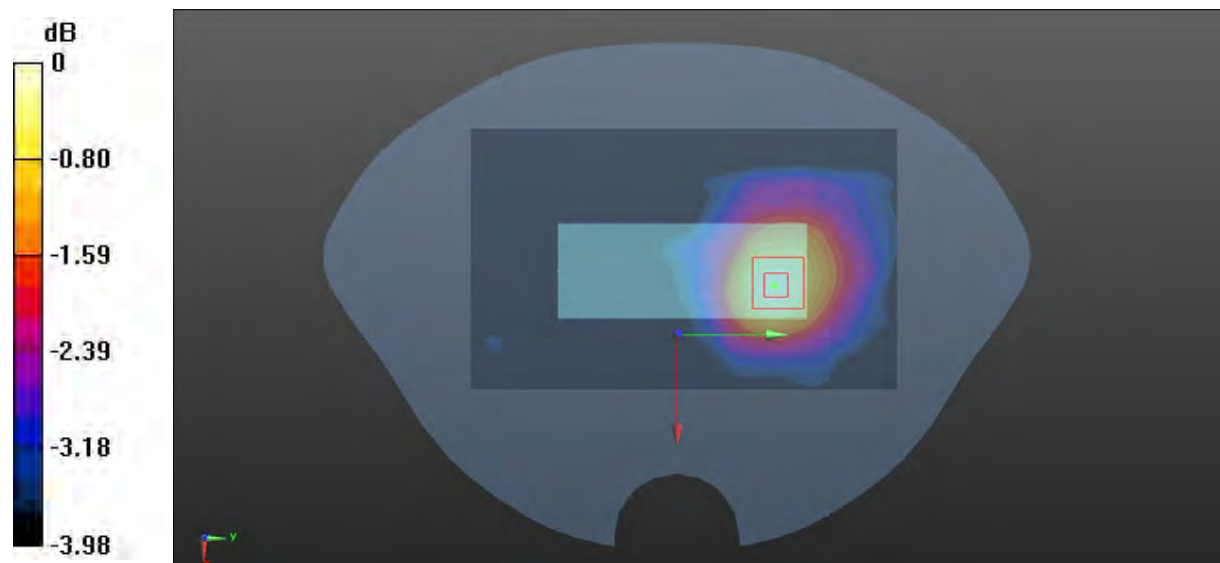

0 dB = 0.0826 W/kg = -10.83 dBW/kg

**Test Plot 61#: SRD 5.2G\_1.4M Chain 1\_Low\_Body Top****DUT: Remote Controller; Type: EFA; Serial: CR21090095-SA-S1**

Communication System: 5G SDR; Frequency: 5154 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 5154$  MHz;  $\sigma = 4.628$  S/m;  $\epsilon_r = 36.244$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(5.55, 5.55, 5.55) @ 5154 MHz; Calibrated: 2020/11/30
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2021/9/1
- Phantom: Head model; Type: QD000P40CC; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

**Area Scan (91x181x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.264 W/kg


**Zoom Scan (7x7x16)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=2mm

Reference Value = 2.785 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.256 W/kg

**SAR(1 g) = 0.149 W/kg; SAR(10 g) = 0.080 W/kg**

Maximum value of SAR (measured) = 0.239 W/kg

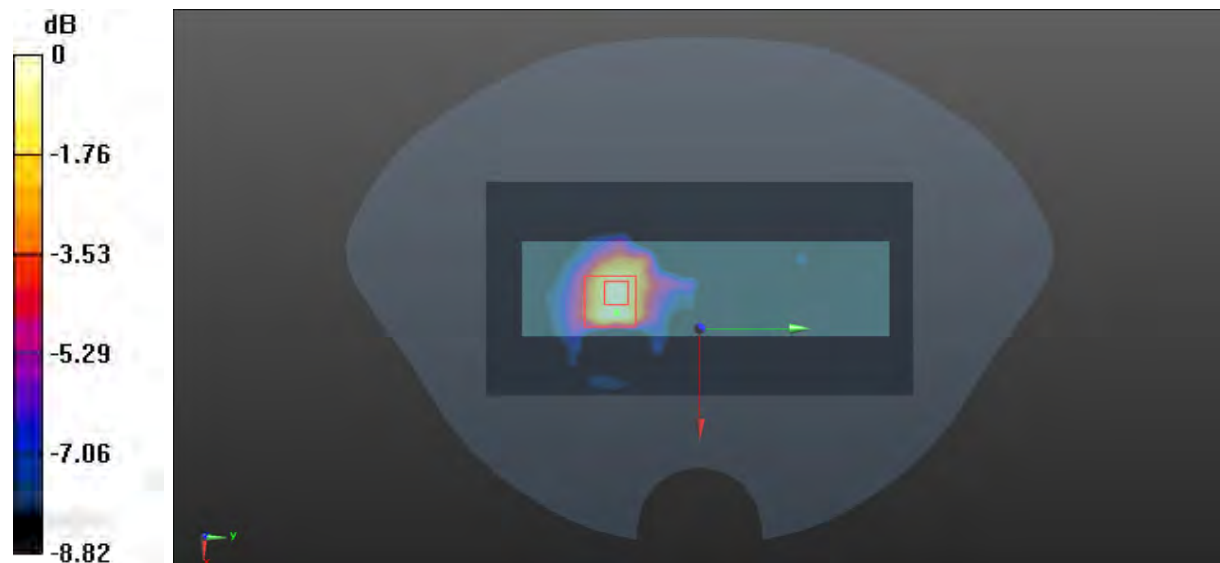

0 dB = 0.239 W/kg = -6.22 dBW/kg

**Test Plot 62#: SRD 5.2G\_1.4M Chain 1\_Mid\_Body Top****DUT: Remote Controller; Type: EFA; Serial: CR21090095-SA-S1**

Communication System: 5G SDR; Frequency: 5201 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 5201$  MHz;  $\sigma = 4.667$  S/m;  $\epsilon_r = 36.037$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(5.55, 5.55, 5.55) @ 5201 MHz; Calibrated: 2020/11/30
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2021/9/1
- Phantom: Head model; Type: QD000P40CC; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

**Area Scan (91x181x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.248 W/kg


**Zoom Scan (7x7x16)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=2mm

Reference Value = 3.524 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 0.282 W/kg

**SAR(1 g) = 0.156 W/kg; SAR(10 g) = 0.086 W/kg**

Maximum value of SAR (measured) = 0.247 W/kg

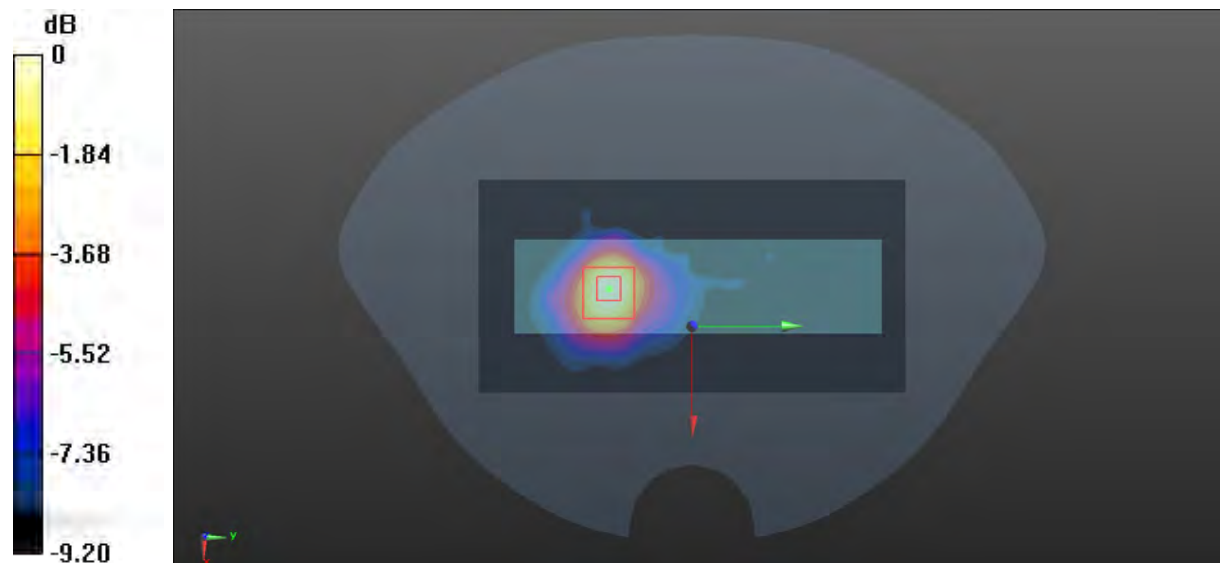

0 dB = 0.247 W/kg = -6.07 dBW/kg

**Test Plot 63#: SRD 5.2G\_1.4M Chain 1\_High\_Body Top****DUT: Remote Controller; Type: EFA; Serial: CR21090095-SA-S1**

Communication System: 5G SDR; Frequency: 5246 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 5246$  MHz;  $\sigma = 4.703$  S/m;  $\epsilon_r = 35.861$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(5.55, 5.55, 5.55) @ 5246 MHz; Calibrated: 2020/11/30
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2021/9/1
- Phantom: Head model; Type: QD000P40CC; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

**Area Scan (91x181x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.267 W/kg


**Zoom Scan (7x7x16)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=2mm

Reference Value = 3.069 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 0.889 W/kg

**SAR(1 g) = 0.179 W/kg; SAR(10 g) = 0.089 W/kg**

Maximum value of SAR (measured) = 0.272 W/kg

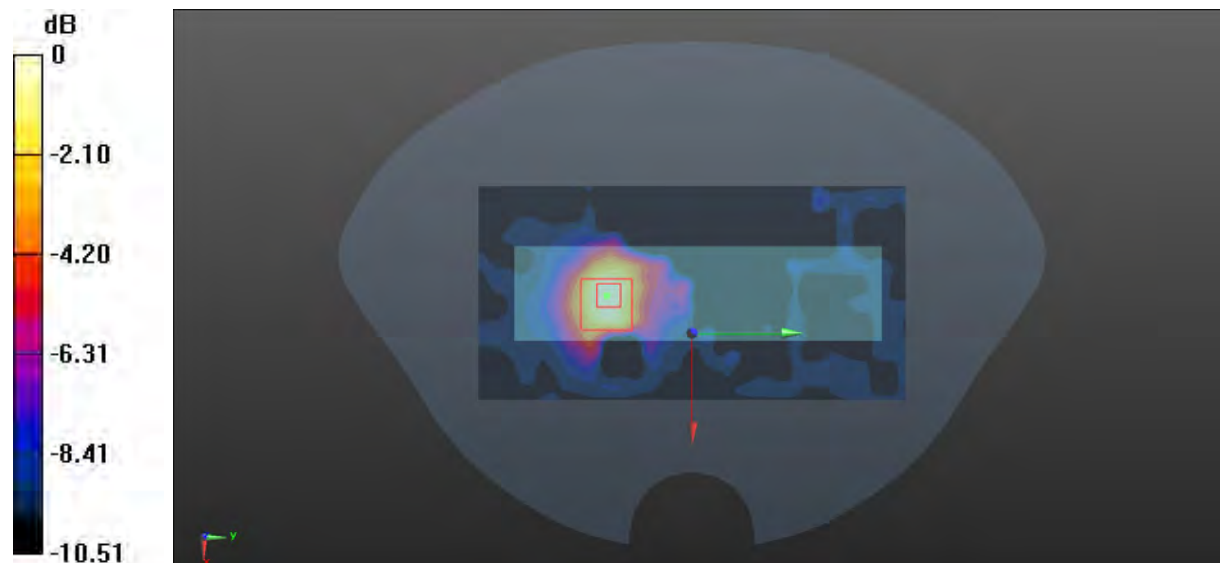

0 dB = 0.272 W/kg = -5.65 dBW/kg

**Test Plot 64#:SRD 5.2G\_20M Chain 1\_Mid\_Body Top****DUT: Remote Controller; Type: EFA; Serial: CR21090095-SA-S1**

Communication System: 5G SDR; Frequency: 5201 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 5201$  MHz;  $\sigma = 4.667$  S/m;  $\epsilon_r = 36.037$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(5.55, 5.55, 5.55) @ 5201 MHz; Calibrated: 2020/11/30
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2021/9/1
- Phantom: Head model; Type: QD000P40CC; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

**Area Scan (91x181x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.234 W/kg


**Zoom Scan (7x7x16)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=2mm

Reference Value = 2.471 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 0.245 W/kg

**SAR(1 g) = 0.144 W/kg; SAR(10 g) = 0.080 W/kg**

Maximum value of SAR (measured) = 0.225 W/kg

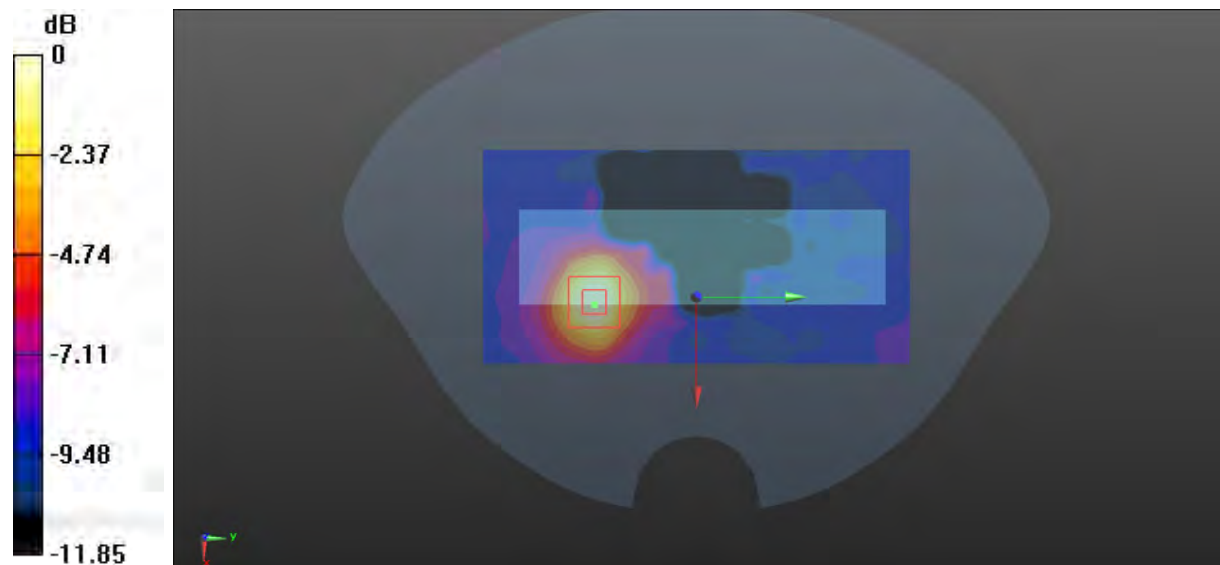

0 dB = 0.225 W/kg = -6.48 dBW/kg



**Test Plot 65#: SRD 5.8G\_1.4M Chain 0\_Mid\_Handheld Back****DUT: Remote Controller; Type: EFA; Serial: CR21090095-SA-S1**

Communication System:5G SDR; Frequency: 5789 MHz;Duty Cycle: 1:1

Medium parameters used:  $f = 5789$  MHz;  $\sigma = 5.243$  S/m;  $\epsilon_r = 35.355$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(4.72, 4.72, 4.72) @ 5789 MHz; Calibrated: 2020/11/30
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2021/9/1
- Phantom: Head model; Type: QD000P40CC; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

**Area Scan (111x151x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.639 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.070 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 0.852 W/kg

**SAR(1 g) = 0.363 W/kg; SAR(10 g) = 0.192 W/kg**

Maximum value of SAR (measured) = 0.621 W/kg

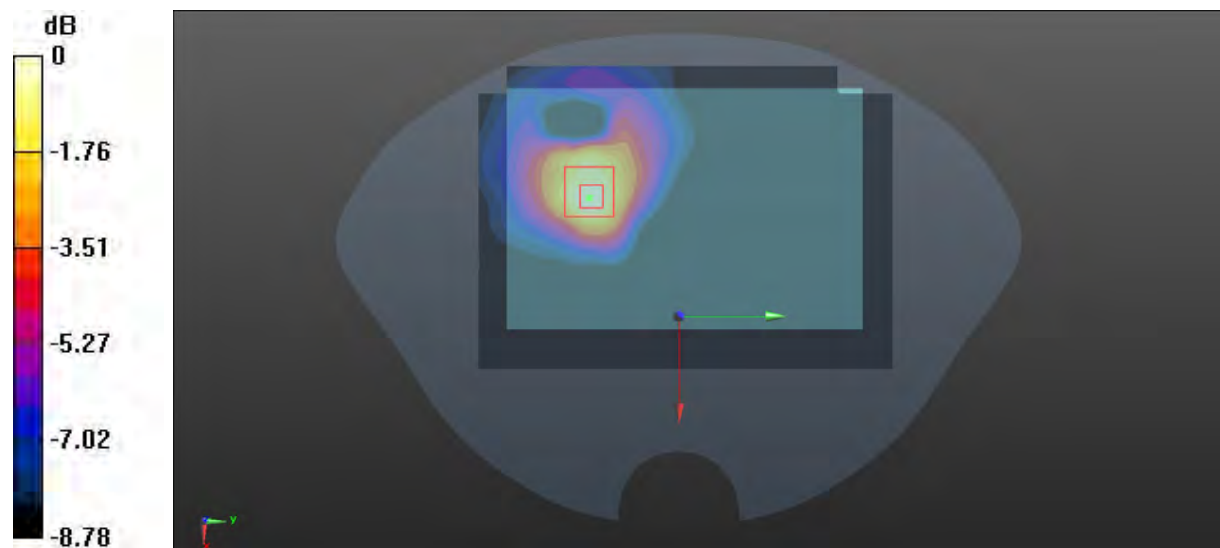

0 dB = 0.621 W/kg = -2.07 dBW/kg

**Test Plot 66#: SRD 5.8G\_1.4M Chain 0\_Mid\_Handheld Front****DUT: Remote Controller; Type: EFA; Serial: CR21090095-SA-S1**

Communication System: 5G SDR; Frequency: 5789 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 5789$  MHz;  $\sigma = 5.243$  S/m;  $\epsilon_r = 35.355$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(4.72, 4.72, 4.72) @ 5789 MHz; Calibrated: 2020/11/30
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2021/9/1
- Phantom: Head model; Type: QD000P40CC; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

**Area Scan (131x181x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.281 W/kg


**Zoom Scan (7x7x16)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=2mm

Reference Value = 4.196 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 0.506 W/kg

**SAR(1 g) = 0.162 W/kg; SAR(10 g) = 0.111 W/kg**

Maximum value of SAR (measured) = 0.278 W/kg

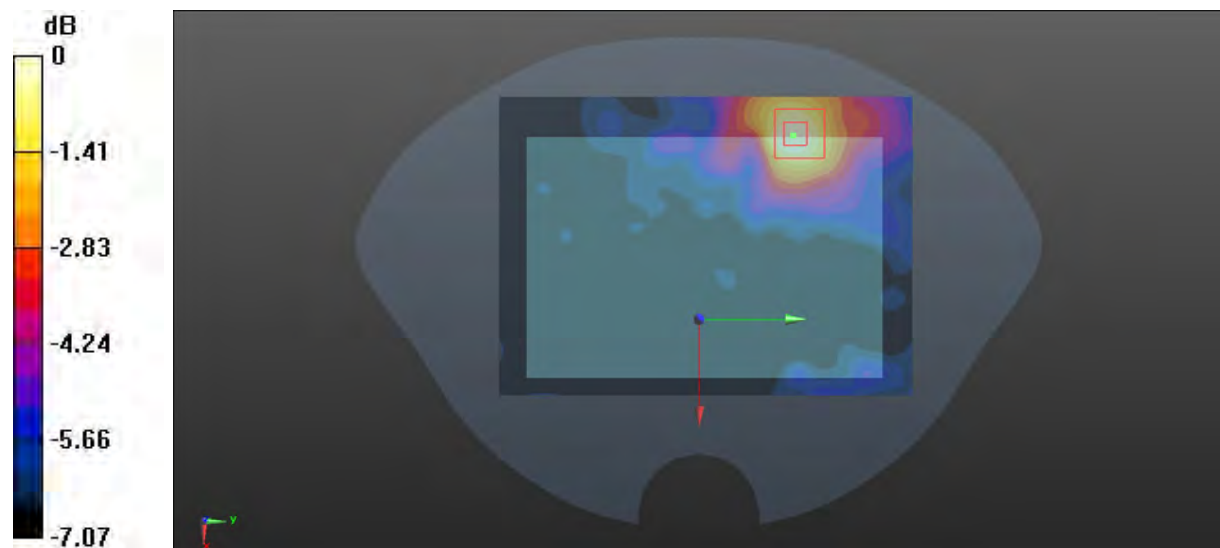

0 dB = 0.278 W/kg = -5.56 dBW/kg

**Test Plot 67#: SRD 5.8G\_1.4M Chain 0\_Mid\_Handheld Left****DUT: Remote Controller; Type: EFA; Serial: CR21090095-SA-S1**

Communication System: 5G SDR; Frequency: 5789 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 5789$  MHz;  $\sigma = 5.243$  S/m;  $\epsilon_r = 35.355$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(4.72, 4.72, 4.72) @ 5789 MHz; Calibrated: 2020/11/30
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2021/9/1
- Phantom: Head model; Type: QD000P40CC; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

**Area Scan (91x151x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.103 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.926 V/m; Power Drift =0.09 dB

Peak SAR (extrapolated) = 0.158 W/kg

**SAR(1 g) = 0.077 W/kg; SAR(10 g) = 0.057 W/kg**

Maximum value of SAR (measured) = 0.114 W/kg

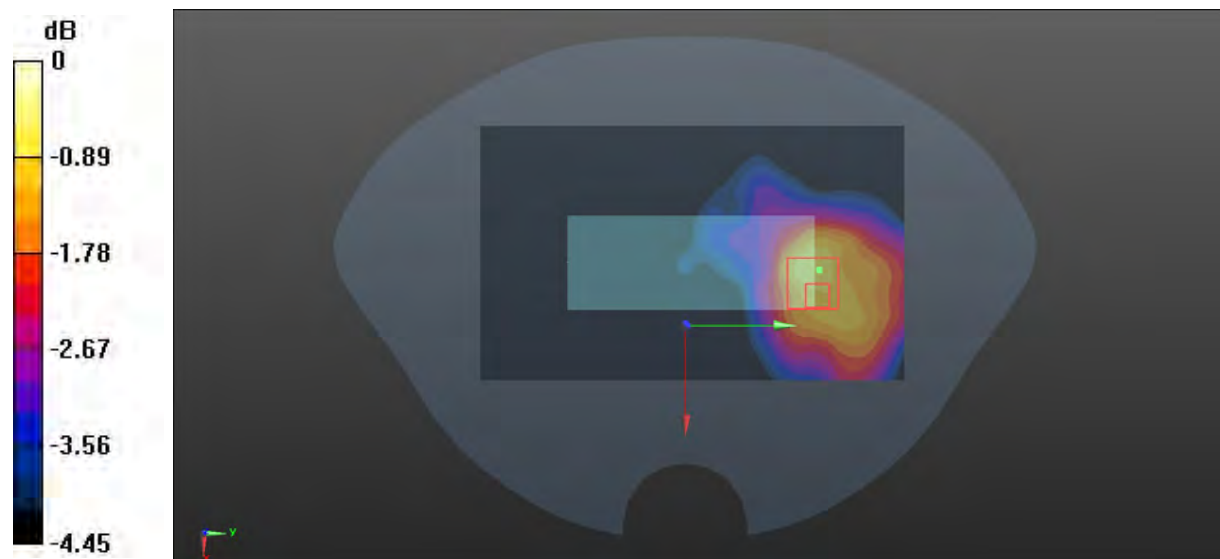

0 dB = 0.114 W/kg = -9.43 dBW/kg

**Test Plot 68#: SRD 5.8G\_1.4M Chain 0\_Mid\_Handheld Right****DUT: Remote Controller; Type: EFA; Serial: CR21090095-SA-S1**

Communication System: 5G SDR; Frequency: 5789 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 5789$  MHz;  $\sigma = 5.243$  S/m;  $\epsilon_r = 35.355$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(4.72, 4.72, 4.72) @ 5789 MHz; Calibrated: 2020/11/30
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2021/9/1
- Phantom: Head model; Type: QD000P40CC; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

**Area Scan (91x151x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.169 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.898 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.253 W/kg

**SAR(1 g) = 0.109 W/kg; SAR(10 g) = 0.078 W/kg**

Maximum value of SAR (measured) = 0.169 W/kg

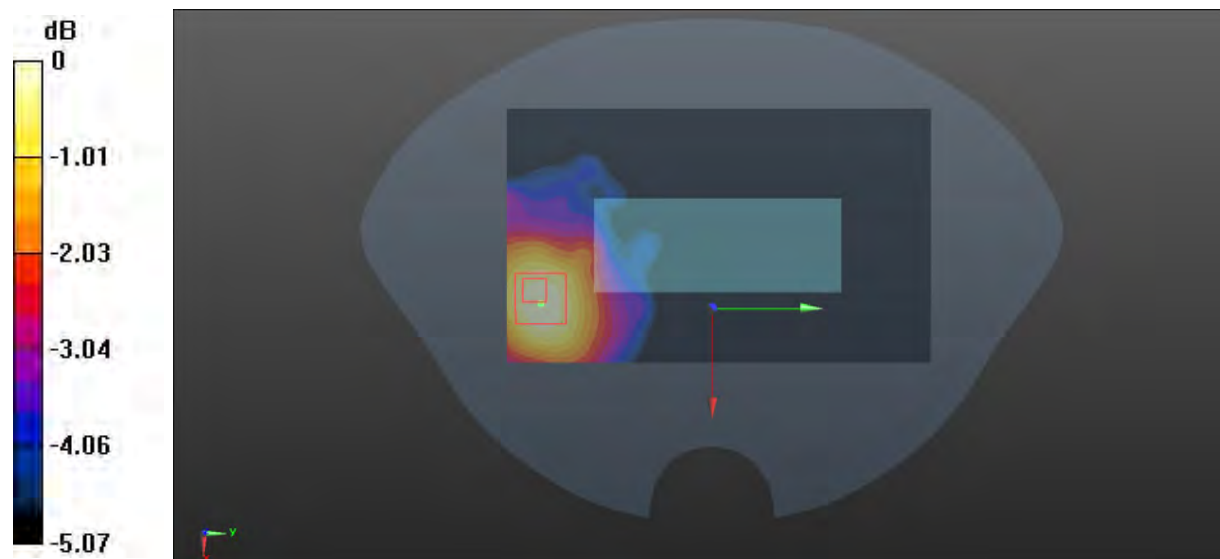

0 dB = 0.169 W/kg = -7.72 dBW/kg

**Test Plot 69#: SRD 5.8G\_1.4M Chain 0\_1.4M\_Low\_Handheld Top****DUT: Remote Controller; Type: EFA; Serial: CR21090095-SA-S1**

Communication System: 5.8G SDR Frequency: 5728 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 5728$  MHz;  $\sigma = 5.223$  S/m;  $\epsilon_r = 35.394$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(4.72, 4.72, 4.72) @ 5728 MHz; Calibrated: 2020/11/30
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2021/9/1
- Phantom: Head model; Type: QD000P40CC; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

**Area Scan (91x181x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 6.76 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.208 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 9.51 W/kg

**SAR(1 g) = 3.15 W/kg; SAR(10 g) = 1.07 W/kg**

Maximum value of SAR (measured) = 6.93 W/kg

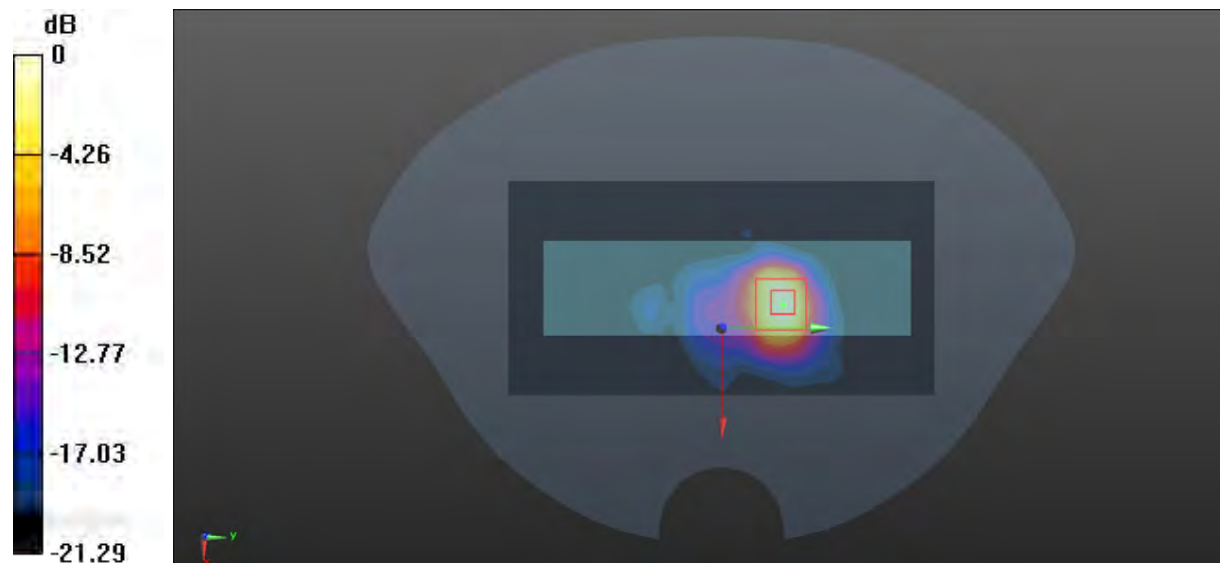

0 dB = 6.93 W/kg = 8.41 dBW/kg

**Test Plot 70#: SRD 5.8G\_1.4M Chain 0\_Mid\_Handheld Top****DUT: Remote Controller; Type: EFA; Serial: CR21090095-SA-S1**

Communication System: 5G SDR; Frequency: 5789 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 5789$  MHz;  $\sigma = 5.243$  S/m;  $\epsilon_r = 35.355$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(4.72, 4.72, 4.72) @ 5789MHz; Calibrated: 2020/11/30
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2021/9/1
- Phantom: Head model; Type: QD000P40CC; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

**Area Scan (91x181x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 5.37 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.326 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 6.53 W/kg

**SAR(1 g) = 2.22 W/kg; SAR(10 g) = 0.779 W/kg**

Maximum value of SAR (measured) = 4.37 W/kg

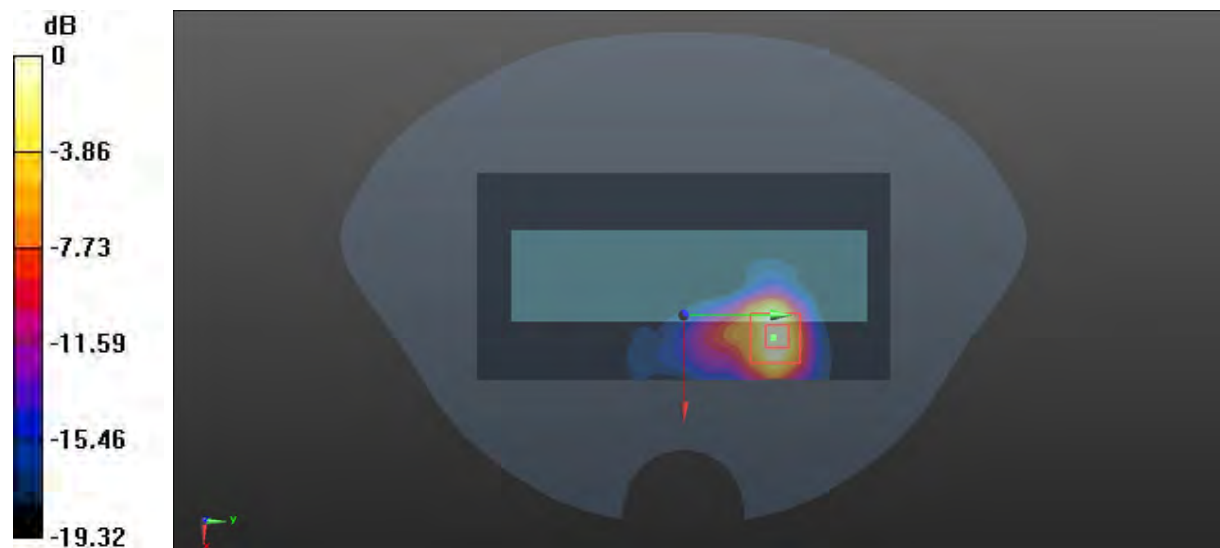

0 dB = 4.37 W/kg = 6.40 dBW/kg

**Test Plot 71#: SRD 5.8G\_1.4M Chain 0\_High\_Handheld Top****DUT: Remote Controller; Type: EFA; Serial: CR21090095-SA-S1**

Communication System: 5G SDR; Frequency: 5847 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 5847$  MHz;  $\sigma = 5.294$  S/m;  $\epsilon_r = 35.161$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(4.72, 4.72, 4.72) @ 5847 MHz; Calibrated: 2020/11/30
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2021/9/1
- Phantom: Head model; Type: QD000P40CC; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

**Area Scan (91x181x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 6.97 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.563 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 9.95 W/kg

**SAR(1 g) = 3.39 W/kg; SAR(10 g) = 1.14 W/kg**

Maximum value of SAR (measured) = 7.30 W/kg

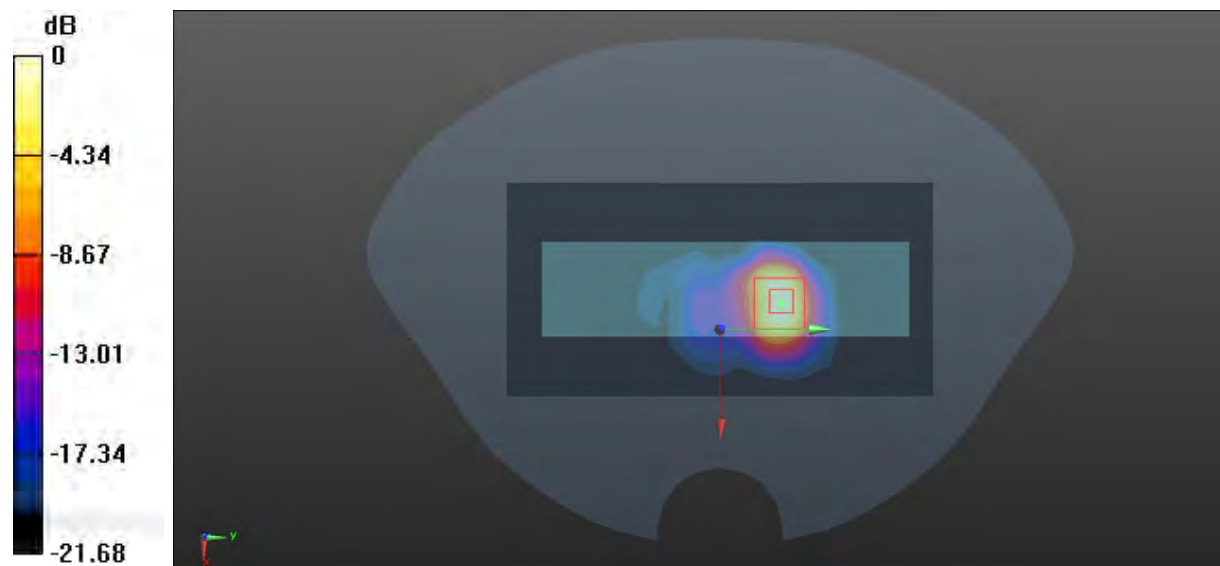

0 dB = 7.30 W/kg = 8.63 dBW/kg

**Test Plot 72#SRD 5.8G\_20M Chain 0\_Mid\_Handheld Top****DUT: Remote Controller; Type: EFA; Serial: CR21090095-SA-S1**

Communication System: 5G SDR; Frequency: 5790 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 5790$  MHz;  $\sigma = 5.251$  S/m;  $\epsilon_r = 35.273$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(4.72, 4.72, 4.72) @ 5790 MHz; Calibrated: 2020/11/30
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2021/9/1
- Phantom: Head model; Type: QD000P40CC; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

**Area Scan (91x181x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 5.01 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.668 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 6.76 W/kg

**SAR(1 g) = 2.18 W/kg; SAR(10 g) = 0.754 W/kg**

Maximum value of SAR (measured) = 4.81 W/kg

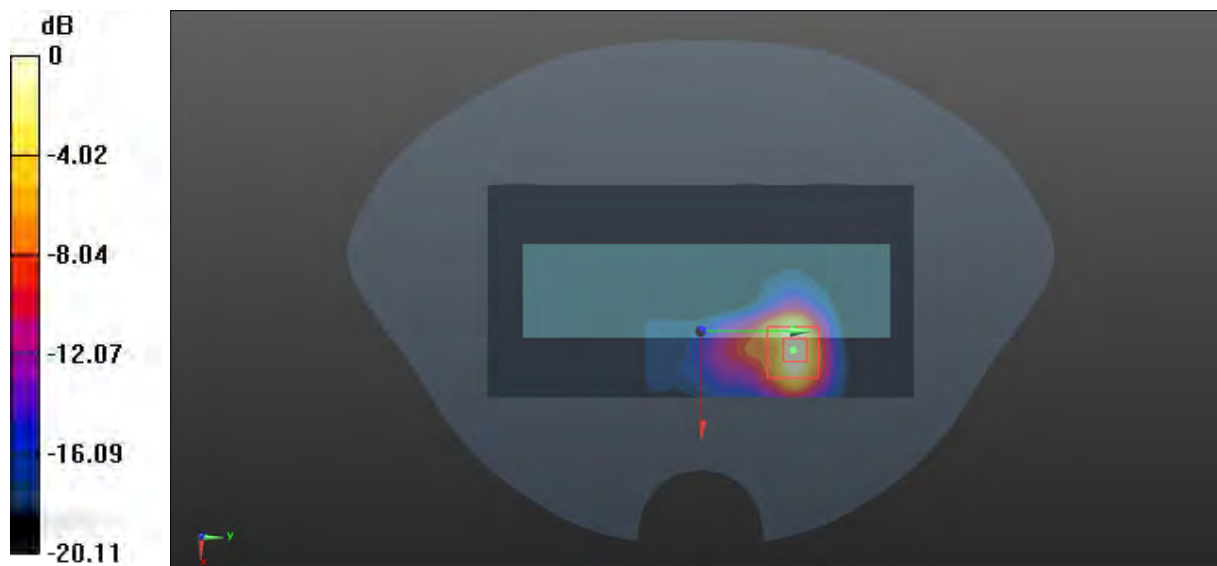

0 dB = 4.81 W/kg = 6.82 dBW/kg



**Test Plot 73#: SRD 5.8G\_1.4M Chain 0\_Mid\_Body Back****DUT: Remote Controller; Type: EFA; Serial: CR21090095-SA-S1**

Communication System: 5G SDR; Frequency: 5789 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 5789$  MHz;  $\sigma = 5.243$  S/m;  $\epsilon_r = 35.355$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(4.72, 4.72, 4.72) @ 5789 MHz; Calibrated: 2020/11/30
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2021/9/1
- Phantom: Head model; Type: QD000P40CC; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

**Area Scan (131x181x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.320 W/kg


**Zoom Scan (7x7x16)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=2mm

Reference Value = 3.148 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 0.397 W/kg

**SAR(1 g) = 0.201 W/kg; SAR(10 g) = 0.126 W/kg**

Maximum value of SAR (measured) = 0.321 W/kg

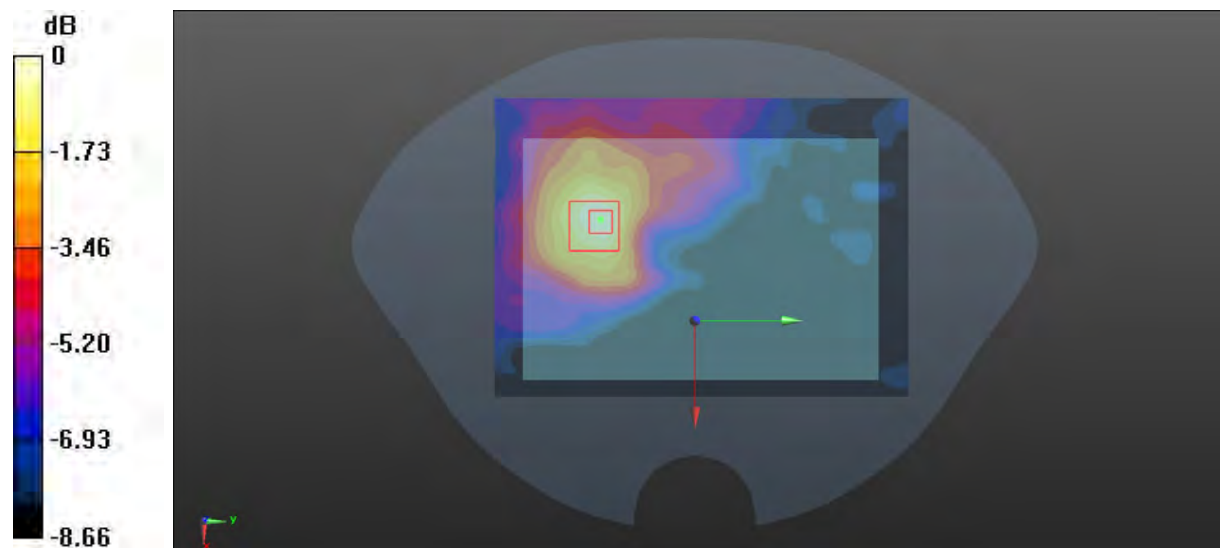

0 dB = 0.321 W/kg = -4.93 dBW/kg

**Test Plot 74#: SRD 5.8G\_1.4M Chain 0\_Mid\_Body Front****DUT: Remote Controller; Type: EFA; Serial: CR21090095-SA-S1**

Communication System: 5G SDR; Frequency: 5789 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 5789$  MHz;  $\sigma = 5.243$  S/m;  $\epsilon_r = 35.355$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(4.72, 4.72, 4.72) @ 5789 MHz; Calibrated: 2020/11/30
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2021/9/1
- Phantom: Head model; Type: QD000P40CC; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

**Area Scan (131x181x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.155 W/kg


**Zoom Scan (7x7x16)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=2mm

Reference Value = 3.480 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 0.283 W/kg

**SAR(1 g) = 0.094 W/kg; SAR(10 g) = 0.073 W/kg**

Maximum value of SAR (measured) = 0.140 W/kg

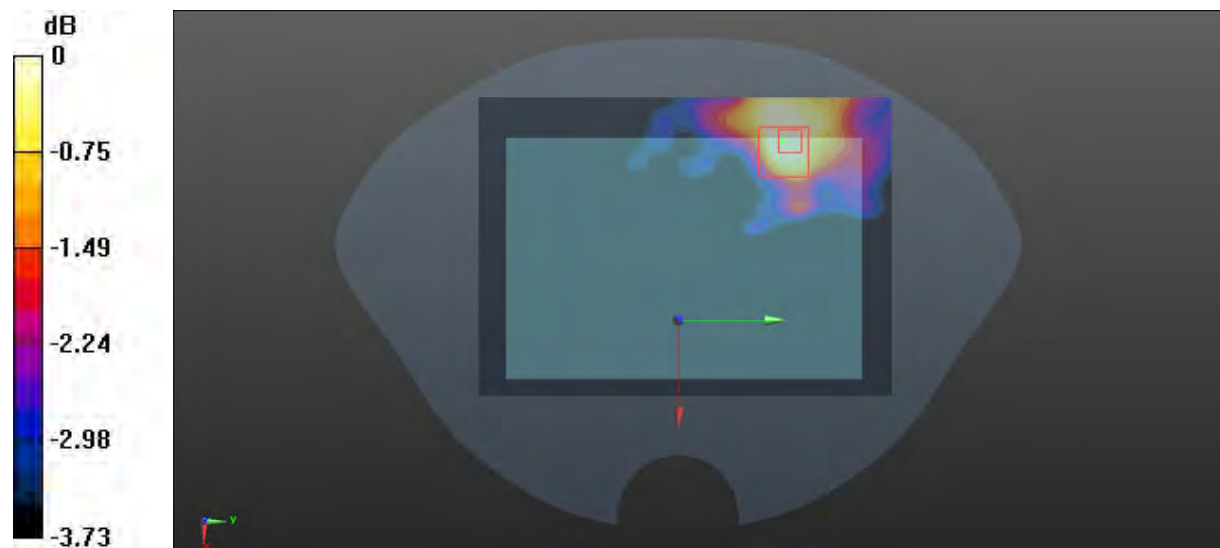

0 dB = 0.140 W/kg = -8.54 dBW/kg

**Test Plot 75#: SRD 5.8G\_1.4M Chain 0\_Mid\_Body Left****DUT: Remote Controller; Type: EFA; Serial: CR21090095-SA-S1**

Communication System: 5G SDR; Frequency: 5789 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 5789$  MHz;  $\sigma = 5.243$  S/m;  $\epsilon_r = 35.355$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(4.72, 4.72, 4.72) @ 5789MHz; Calibrated: 2020/11/30
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2021/9/1
- Phantom: Head model; Type: QD000P40CC; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

**Area Scan (91x151x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.195 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.639 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 0.219 W/kg

**SAR(1 g) = 0.127 W/kg; SAR(10 g) = 0.082 W/kg**

Maximum value of SAR (measured) = 0.186 W/kg

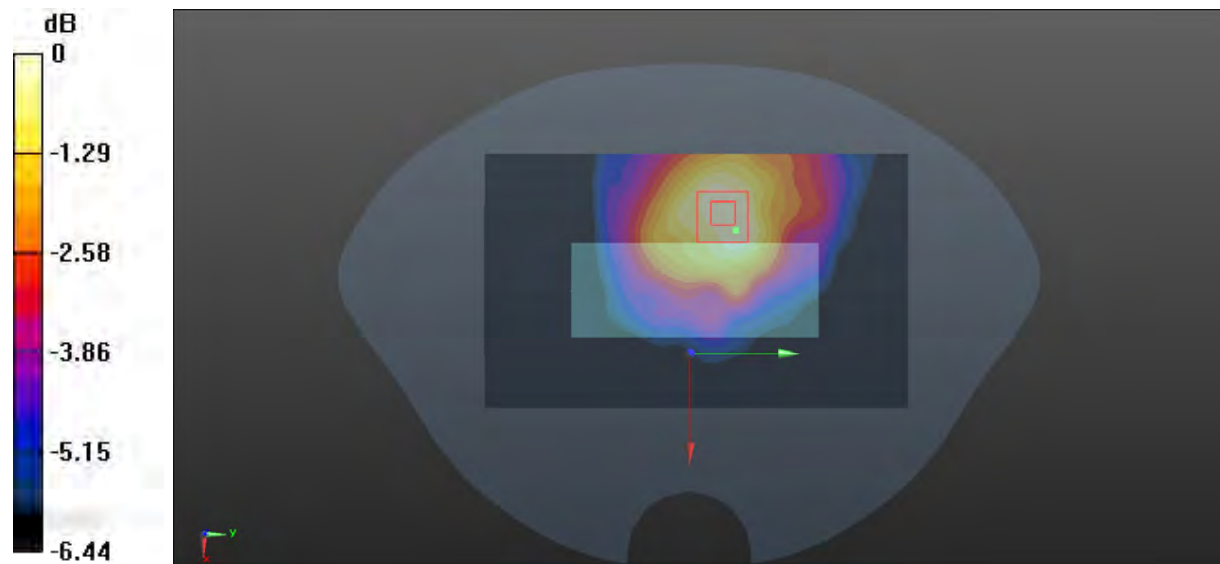

0 dB = 0.186 W/kg = -7.30 dBW/kg

**Test Plot 76#: SRD 5.8G\_1.4M Chain 0\_Mid\_Body Right****DUT: Remote Controller; Type: EFA; Serial: CR21090095-SA-S1**

Communication System: 5G SDR; Frequency: 5789 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 5789$  MHz;  $\sigma = 5.243$  S/m;  $\epsilon_r = 35.355$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(4.72, 4.72, 4.72) @ 5789 MHz; Calibrated: 2020/11/30
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2021/9/1
- Phantom: Head model; Type: QD000P40CC; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

**Area Scan (91x151x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.184 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.581 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 0.245 W/kg

**SAR(1 g) = 0.117 W/kg; SAR(10 g) = 0.075 W/kg**

Maximum value of SAR (measured) = 0.196 W/kg

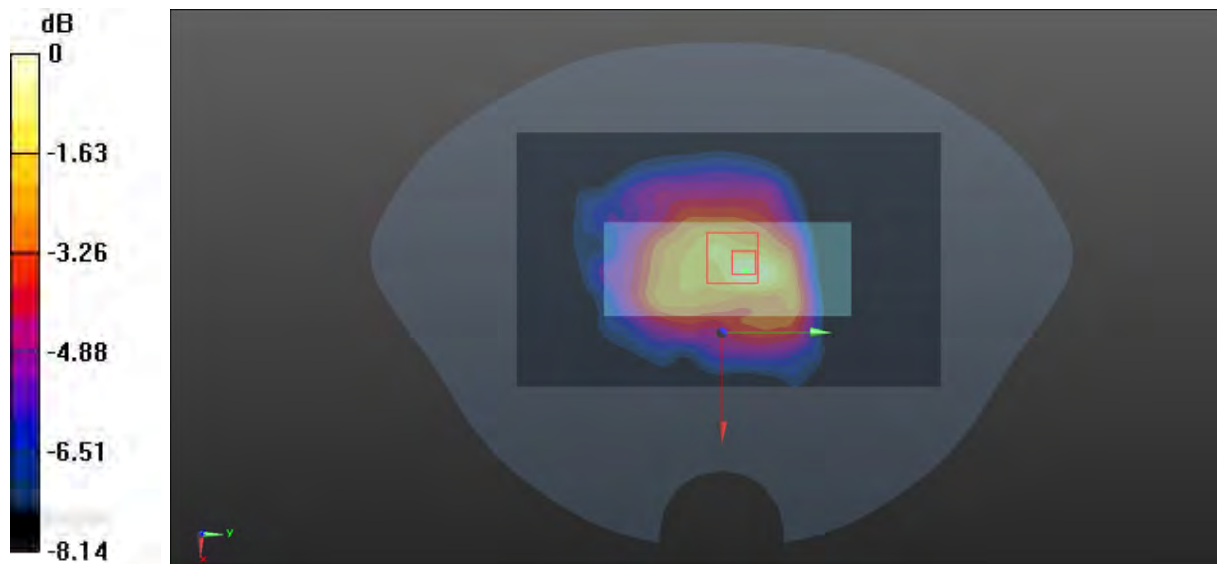

0 dB = 0.196 W/kg = -7.08 dBW/kg

**Test Plot 77#: SRD 5.8G\_1.4M Chain 0\_Low\_Body Top****DUT: Remote Controller; Type: EFA; Serial: CR21090095-SA-S1**

Communication System: 5G SDR; Frequency: 5728 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 5728$  MHz;  $\sigma = 5.223$  S/m;  $\epsilon_r = 35.394$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(4.72, 4.72, 4.72) @ 5728 MHz; Calibrated: 2020/11/30
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2021/9/1
- Phantom: Head model; Type: QD000P40CC; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

**Area Scan (91x181x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 1.03 W/kg


**Zoom Scan (7x7x16)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=2mm

Reference Value = 4.908 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 1.12 W/kg

**SAR(1 g) = 0.634 W/kg; SAR(10 g) = 0.310 W/kg**

Maximum value of SAR (measured) = 1.03 W/kg

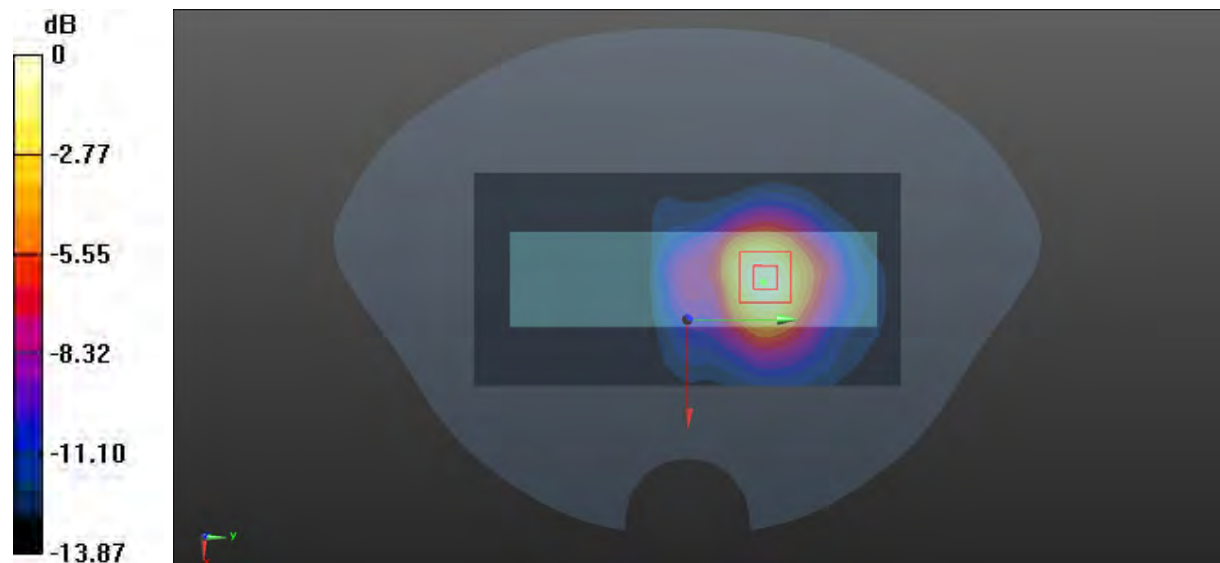

0 dB = 1.03 W/kg = 0.13 dBW/kg

**Test Plot 78#: SRD 5.8G\_1.4M Chain 0\_Mid\_Body Top****DUT: Remote Controller; Type: EFA; Serial: CR21090095-SA-S1**

Communication System: 5G SDR; Frequency: 5789 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 5789$  MHz;  $\sigma = 5.243$  S/m;  $\epsilon_r = 35.355$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(4.72, 4.72, 4.72) @ 5789 MHz; Calibrated: 2020/11/30
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2021/9/1
- Phantom: Head model; Type: QD000P40CC; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

**Area Scan (91x181x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.954 W/kg


**Zoom Scan (7x7x16)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=2mm

Reference Value = 4.560 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 0.991 W/kg

**SAR(1 g) = 0.566 W/kg; SAR(10 g) = 0.279 W/kg**

Maximum value of SAR (measured) = 0.925 W/kg

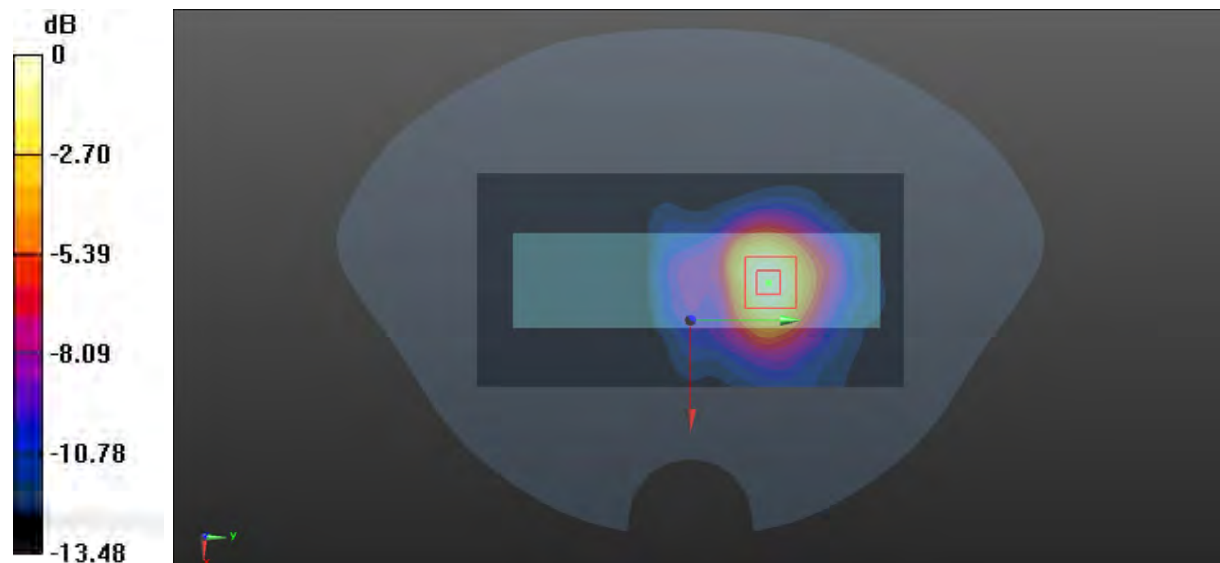

0 dB = 0.925 W/kg = -0.34 dBW/kg

**Test Plot 79#:SRD 5.8G\_1.4M Chain 0\_Mid\_Body Top****DUT: Remote Controller; Type: EFA; Serial: CR21090095-SA-S1**

Communication System: 5G SDR; Frequency: 5847 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 5847$  MHz;  $\sigma = 5.294$  S/m;  $\epsilon_r = 35.1612$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(4.72, 4.72, 4.72) @ 5847 MHz; Calibrated: 2020/11/30
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2021/9/1
- Phantom: Head model; Type: QD000P40CC; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

**Area Scan (91x181x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 1.00 W/kg


**Zoom Scan (7x7x16)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=2mm

Reference Value = 4.059 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 1.10 W/kg

**SAR(1 g) = 0.614 W/kg; SAR(10 g) = 0.300 W/kg**

Maximum value of SAR (measured) = 1.01 W/kg

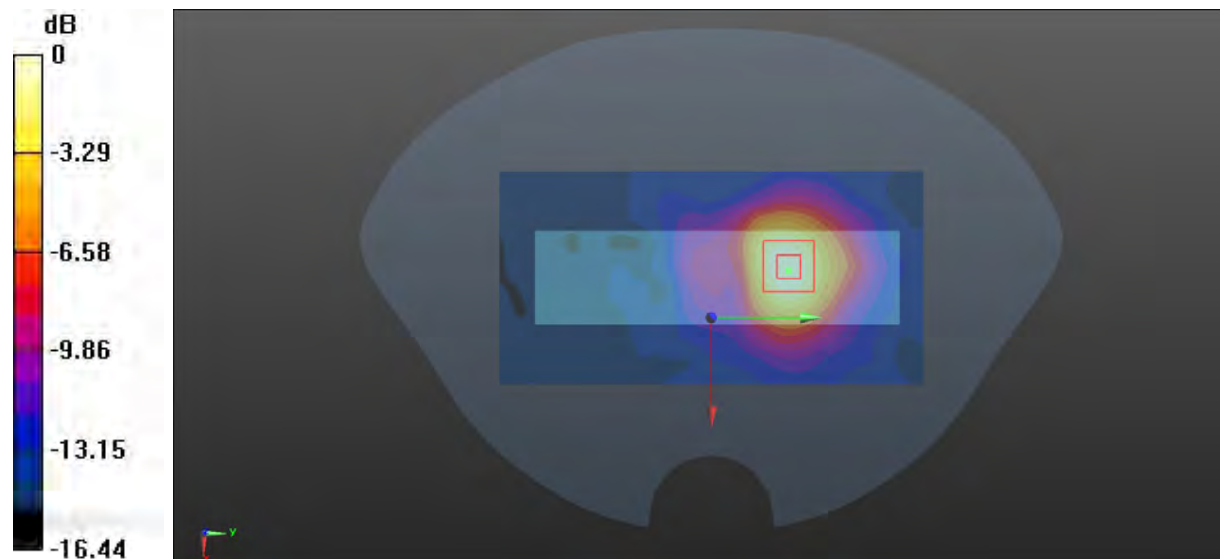

0 dB = 1.01 W/kg = 0.04 dBW/kg

**Test Plot 80#: SRD 5.8G\_20M Chain 0\_Mid\_Body Top****DUT: Remote Controller; Type: EFA; Serial: CR21090095-SA-S1**

Communication System: 5G SDR; Frequency: 5790 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 5790$  MHz;  $\sigma = 5.2513$  S/m;  $\epsilon_r = 35.273$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(4.72, 4.72, 4.72) @ 5790 MHz; Calibrated: 2020/11/30
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2021/9/1
- Phantom: Head model; Type: QD000P40CC; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

**Area Scan (91x181x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.822 W/kg


**Zoom Scan (7x7x16)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=2mm

Reference Value = 4.302 V/m; Power Drift = -0.19 dB

Peak SAR (extrapolated) = 0.898 W/kg

**SAR(1 g) = 0.505 W/kg; SAR(10 g) = 0.249 W/kg**

Maximum value of SAR (measured) = 0.826 W/kg

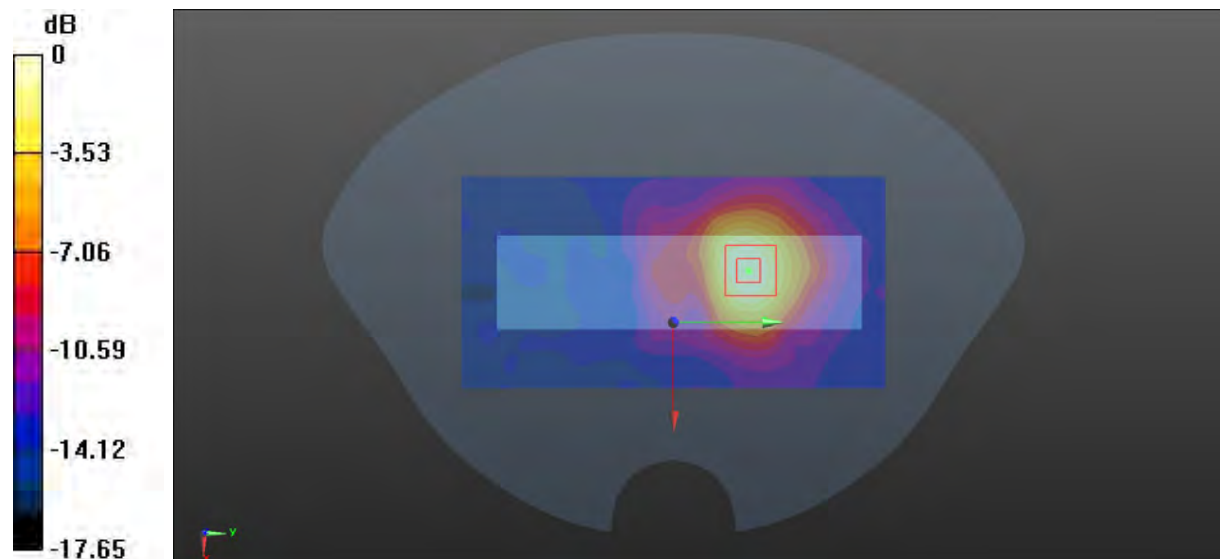

0 dB = 0.826 W/kg = -0.83 dBW/kg



**Test Plot 81#: SRD 5.8G\_1.4M Chain 1\_Mid\_Handheld Back****DUT: Remote Controller; Type: EFA; Serial: CR21090095-SA-S1**

Communication System: 5G SDR; Frequency: 5789 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 5789$  MHz;  $\sigma = 5.243$  S/m;  $\epsilon_r = 35.355$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(4.72, 4.72, 4.72) @ 5789 MHz; Calibrated: 2020/11/30
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2021/9/1
- Phantom: Head model; Type: QD000P40CC; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

**Area Scan (111x151x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.679 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.039 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 0.906 W/kg

**SAR(1 g) = 0.357 W/kg; SAR(10 g) = 0.167 W/kg**

Maximum value of SAR (measured) = 0.652 W/kg

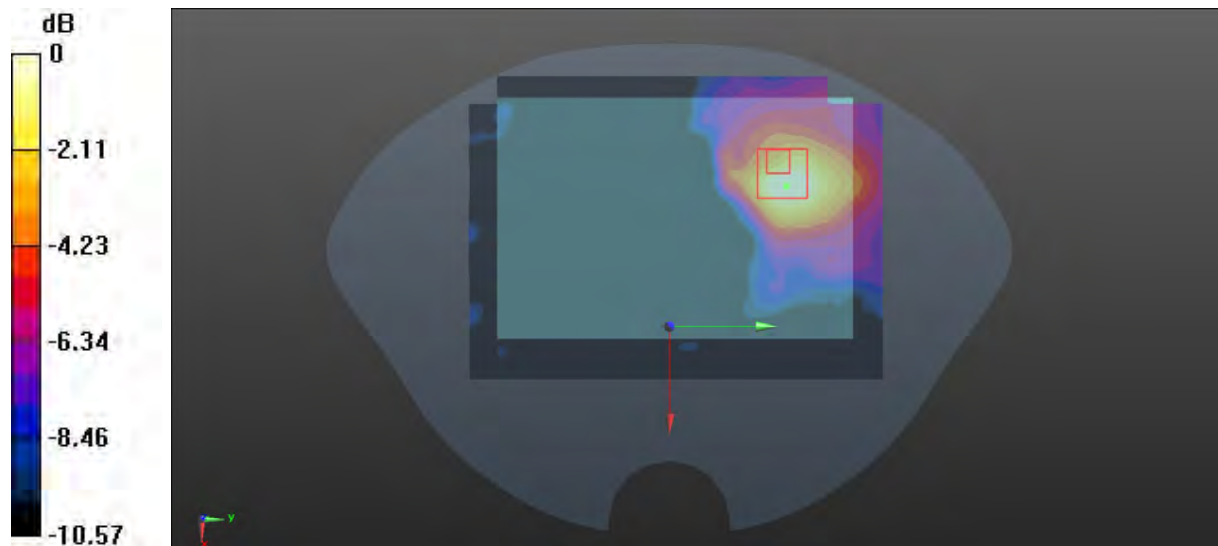

0 dB = 0.652 W/kg = -1.86 dBW/kg

**Test Plot 82#: SRD 5.8G\_1.4M Chain 1\_Mid\_Handheld Front****DUT: Remote Controller; Type: EFA; Serial: CR21090095-SA-S1**

Communication System: 5G SDR; Frequency: 5789 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 5789$  MHz;  $\sigma = 5.243$  S/m;  $\epsilon_r = 35.355$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(4.72, 4.72, 4.72) @ 5789 MHz; Calibrated: 2020/11/30
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2021/9/1
- Phantom: Head model; Type: QD000P40CC; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

**Area Scan (131x181x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.737 W/kg


**Zoom Scan (7x7x16)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=2mm

Reference Value = 3.170 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.901 W/kg

**SAR(1 g) = 0.454 W/kg; SAR(10 g) = 0.227 W/kg**

Maximum value of SAR (measured) = 0.763 W/kg

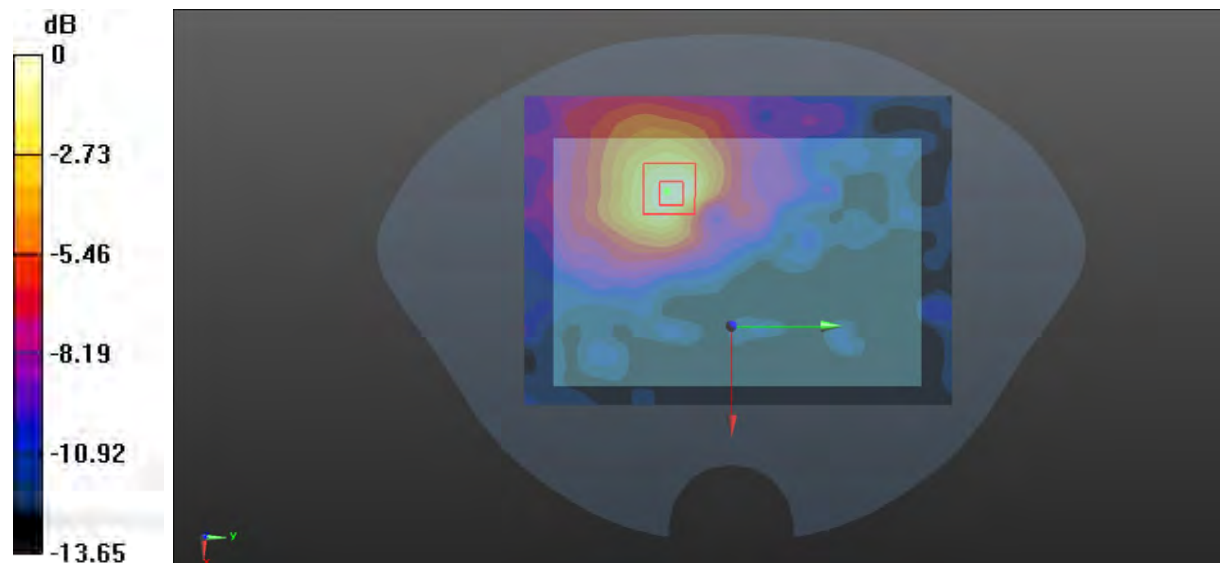

0 dB = 0.763 W/kg = -1.17 dBW/kg

**Test Plot 83#: SRD 5.8G\_1.4M Chain 1\_Mid\_Handheld Left****DUT: Remote Controller; Type: EFA; Serial: CR21090095-SA-S1**

Communication System: 5G SDR; Frequency: 5789MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 5789\text{MHz}$ ;  $\sigma = 5.243\text{ S/m}$ ;  $\epsilon_r = 35.355$ ;  $\rho = 1000\text{ kg/m}^3$ 

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(4.72, 4.72, 4.72) @ 5789 MHz; Calibrated: 2020/11/30
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2021/9/1
- Phantom: Head model; Type: QD000P40CC; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

**Area Scan (101x181x1):** Interpolated grid:  $dx=1.000\text{ mm}$ ,  $dy=1.000\text{ mm}$ 

Maximum value of SAR (interpolated) = 0.319 W/kg


**Zoom Scan (7x7x16)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=2\text{mm}$ 

Reference Value = 4.967 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 0.489 W/kg

**SAR(1 g) = 0.245 W/kg; SAR(10 g) = 0.125 W/kg.**

Maximum value of SAR (measured) = 0.465 W/kg

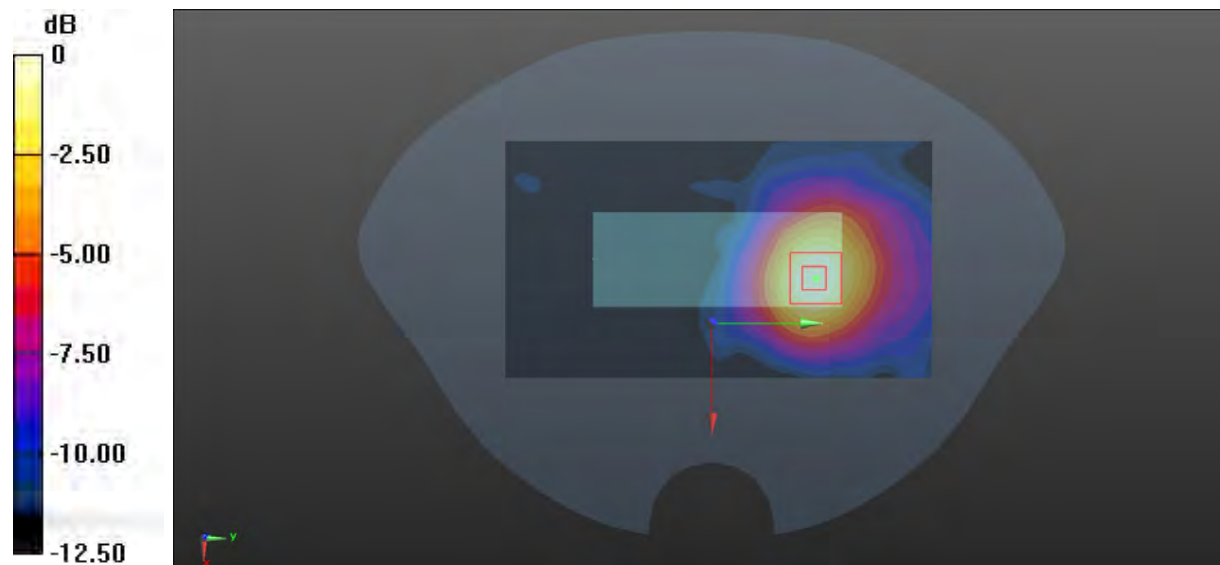

0 dB = 0.465 W/kg = -3.33 dBW/kg

**Test Plot 84#:** SRD 5.8G\_1.4M Chain 1\_Mid\_Handheld Right**DUT: Remote Controller; Type: EFA; Serial: CR21090095-SA-S1**

Communication System: 5G SDR; Frequency: 5789 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 5789$  MHz;  $\sigma = 5.243$  S/m;  $\epsilon_r = 35.355$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(4.72, 4.72, 4.72) @ 5789 MHz; Calibrated: 2020/11/30
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2021/9/1
- Phantom: Head model; Type: QD000P40CC; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

**Area Scan (91x151x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm.

Maximum value of SAR (interpolated) = 0.0499 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.694 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 0.0460 W/kg

**SAR(1 g) = 0.039 W/kg; SAR(10 g) = 0.035 W/kg**

Maximum value of SAR (measured) = 0.0461 W/kg

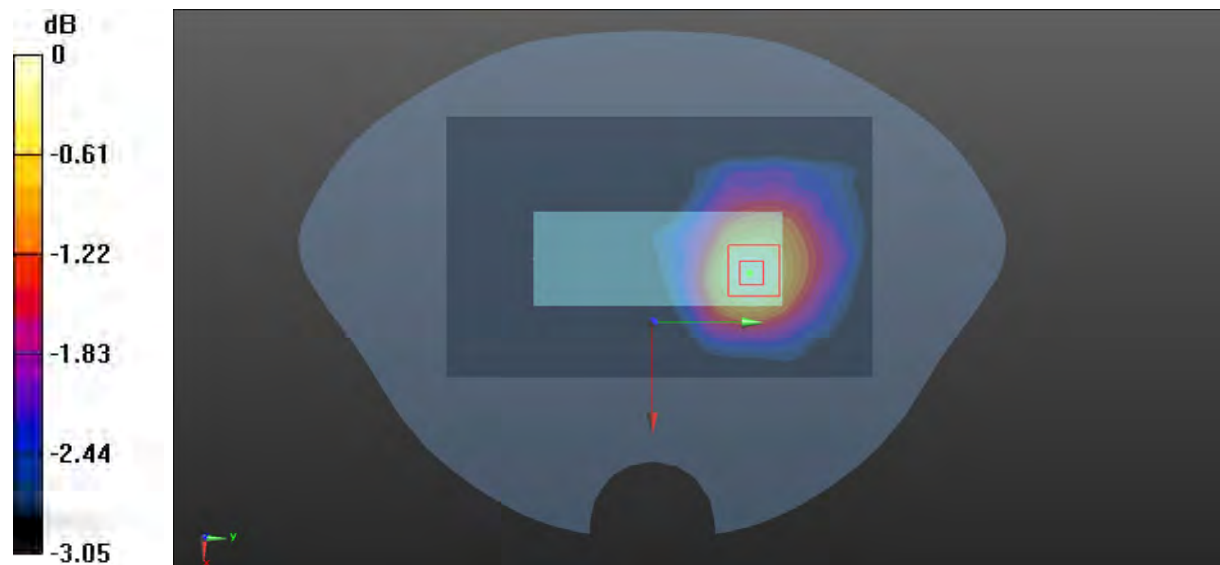

0 dB = 0.0461 W/kg = -13.36 dBW/kg

**Test Plot 85#: SRD 5.8G\_1.4M Chain 1\_Low\_Handheld Top****DUT: Remote Controller; Type: EFA; Serial: CR21090095-SA-S1**

Communication System: 5G SDR; Frequency: 5728 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 5728$  MHz;  $\sigma = 5.223$  S/m;  $\epsilon_r = 35.394$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(4.72, 4.72, 4.72) @ 5728 MHz; Calibrated: 2020/11/30
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2021/9/1
- Phantom: Head model; Type: QD000P40CC; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

**Area Scan (91x181x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 6.15 W/kg


**Zoom Scan (7x7x16)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=2mm

Reference Value = 4.723 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 7.19 W/kg

**SAR(1 g) = 2.97 W/kg; SAR(10 g) = 1.06 W/kg**

Maximum value of SAR (measured) = 6.04 W/kg

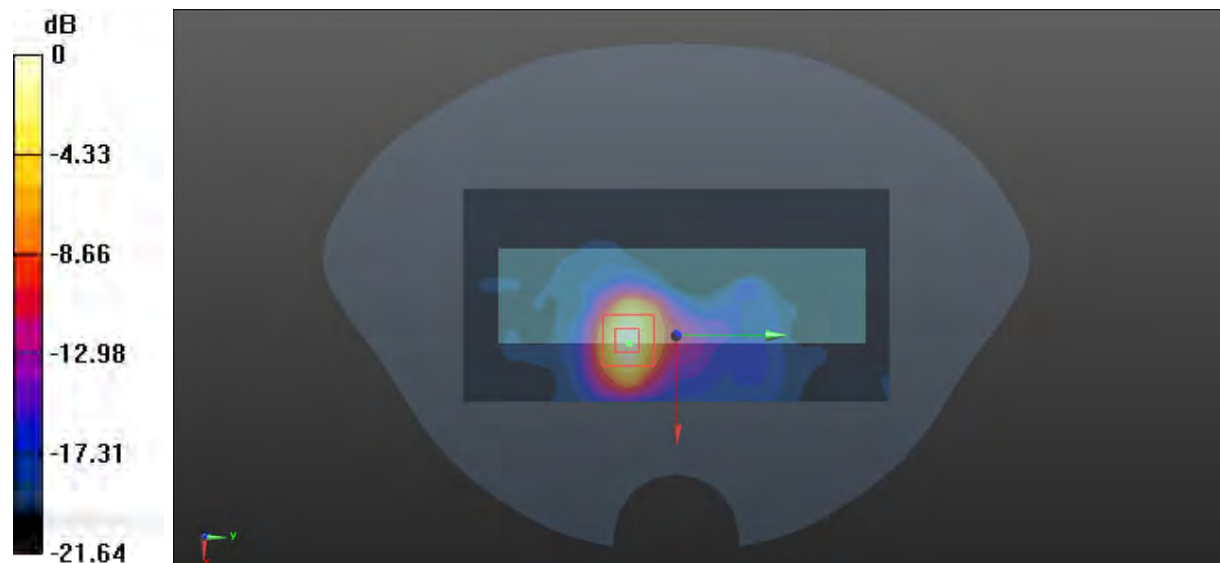

0 dB = 6.04 W/kg = 7.81 dBW/kg

**Test Plot 86#: SRD 5.8G\_1.4M Chain 1\_Mid\_Handheld Top****DUT: Remote Controller; Type: EFA; Serial: CR21090095-SA-S1**

Communication System: 5G SDR ; Frequency: 5789 MHz;Duty Cycle: 1:1

Medium parameters used:  $f = 5789$  MHz;  $\sigma = 5.243$  S/m;  $\epsilon_r = 35.355$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(4.72, 4.72, 4.72) @ 5789 MHz; Calibrated: 2020/11/30
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2021/9/1
- Phantom: Head model; Type: QD000P40CC; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

**Area Scan (91x181x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 3.94 W/kg


**Zoom Scan (7x7x16)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=2mm

Reference Value = 4.508 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 4.54 W/kg

**SAR(1 g) = 3.01 W/kg; SAR(10 g) = 1.1 W/kg**

Maximum value of SAR (measured) = 3.88 W/kg

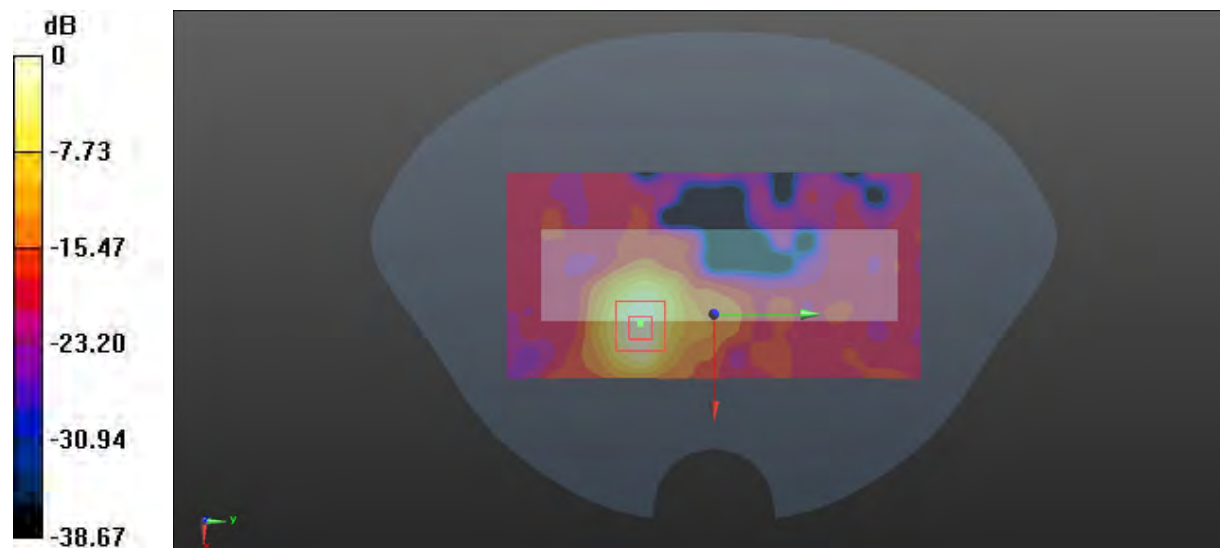

0 dB = 3.88 W/kg = 5.89 dBW/kg

**Test Plot 87#: SRD 5.8G\_1.4M Chain 1\_High\_Handheld Top****DUT: Remote Controller; Type: EFA; Serial: CR21090095-SA-S1**

Communication System: 5G SDR; Frequency: 5847 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 5847$  MHz;  $\sigma = 5.294$  S/m;  $\epsilon_r = 35.161$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(4.72, 4.72, 4.72) @ 5847 MHz; Calibrated: 2020/11/30
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2021/9/1
- Phantom: Head model; Type: QD000P40CC; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

**Area Scan (91x181x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 8.65 W/kg


**Zoom Scan (7x7x16)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=2mm

Reference Value = 6.886 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 12.4 W/kg

**SAR(1 g) = 4.88 W/kg; SAR(10 g) = 1.8 W/kg**

Maximum value of SAR (measured) = 9.69 W/kg

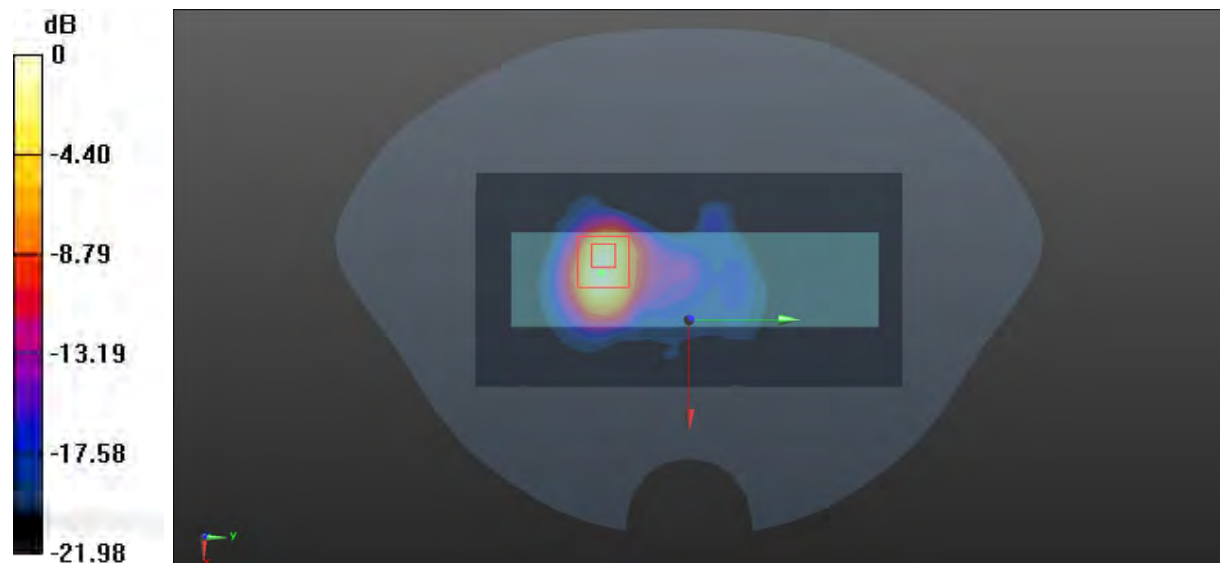

0 dB = 9.69 W/kg = 9.86 dBW/kg

**Test Plot 88#:SRD 5.8G\_20 Chain 1\_Mid\_Handheld Top****DUT: Remote Controller; Type: EFA; Serial: CR21090095-SA-S1**

Communication System: 5G SDR; Frequency: 5790 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 5790$  MHz;  $\sigma = 5.251$  S/m;  $\epsilon_r = 35.273$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(4.72, 4.72, 4.72) @ 5790 MHz; Calibrated: 2020/11/30
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2021/9/1
- Phantom: Head model; Type: QD000P40CC; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

**Area Scan (91x181x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 6.16 W/kg


**Zoom Scan (7x7x16)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=2mm

Reference Value = 8.962 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 7.18 W/kg

**SAR(1 g) = 1.98 W/kg; SAR(10 g) = 0.770 W/kg**

Maximum value of SAR (measured) = 6.17 W/kg

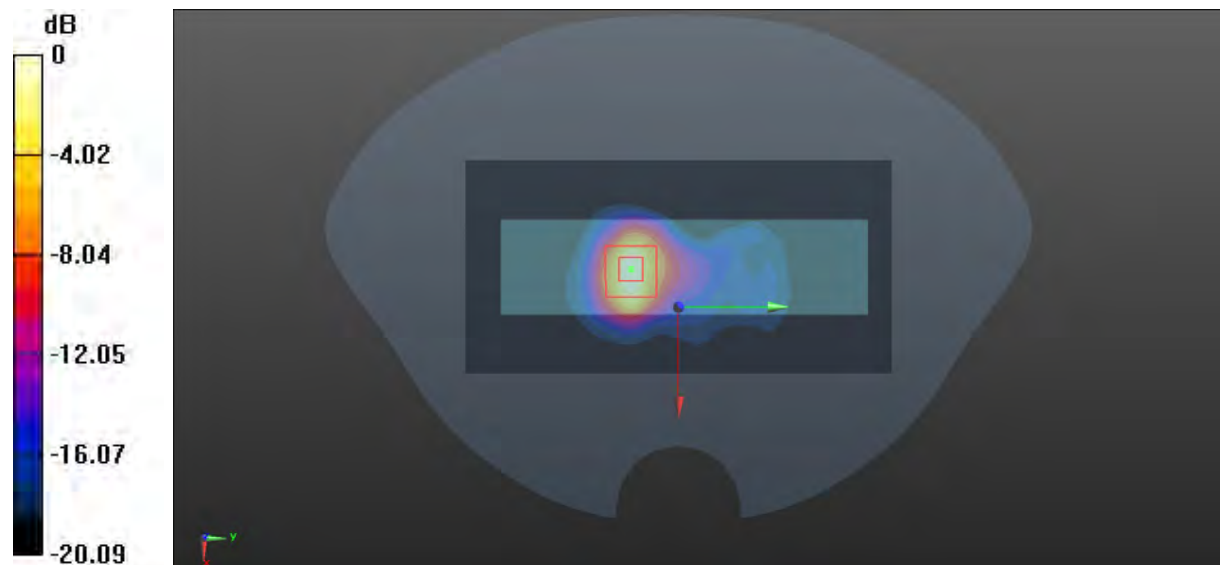

0 dB = 6.17 W/kg = 7.90 dBW/kg



**Test Plot 89#: SRD 5.8G\_1.4M Chain 1\_Mid\_Body Back****DUT: Remote Controller; Type: EFA; Serial: CR21090095-SA-S1**

Communication System: 5G SDR; Frequency: 5789 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 5789$  MHz;  $\sigma = 5.243$  S/m;  $\epsilon_r = 35.355$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(4.72, 4.72, 4.72) @ 5789 MHz; Calibrated: 2020/11/30
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2021/9/1
- Phantom: Head model; Type: QD000P40CC; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

**Area Scan (131x181x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.479 W/kg

**Zoom Scan (7x7x16)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=2mm

Reference Value = 3.067 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 0.605 W/kg

**SAR(1 g) = 0.349 W/kg; SAR(10 g) = 0.194 W/kg**

Maximum value of SAR (measured) = 0.572 W/kg



0 dB = 0.572 W/kg = -2.43 dBW/kg

**Test Plot 90#: SRD 5.8G\_1.4M Chain 1\_Mid\_Body Front****DUT: Remote Controller; Type: EFA; Serial: CR21090095-SA-S1**

Communication System: 5G SDR; Frequency: 5789 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 5789$  MHz;  $\sigma = 5.243$  S/m;  $\epsilon_r = 35.355$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(4.72, 4.72, 4.72) @ 5789 MHz; Calibrated: 2020/11/30
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2021/9/1
- Phantom: Head model; Type: QD000P40CC; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

**Area Scan (131x181x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.206 W/kg


**Zoom Scan (7x7x16)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=2mm

Reference Value = 2.791 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.221 W/kg

**SAR(1 g) = 0.143 W/kg; SAR(10 g) = 0.099 W/kg**

Maximum value of SAR (measured) = 0.208 W/kg

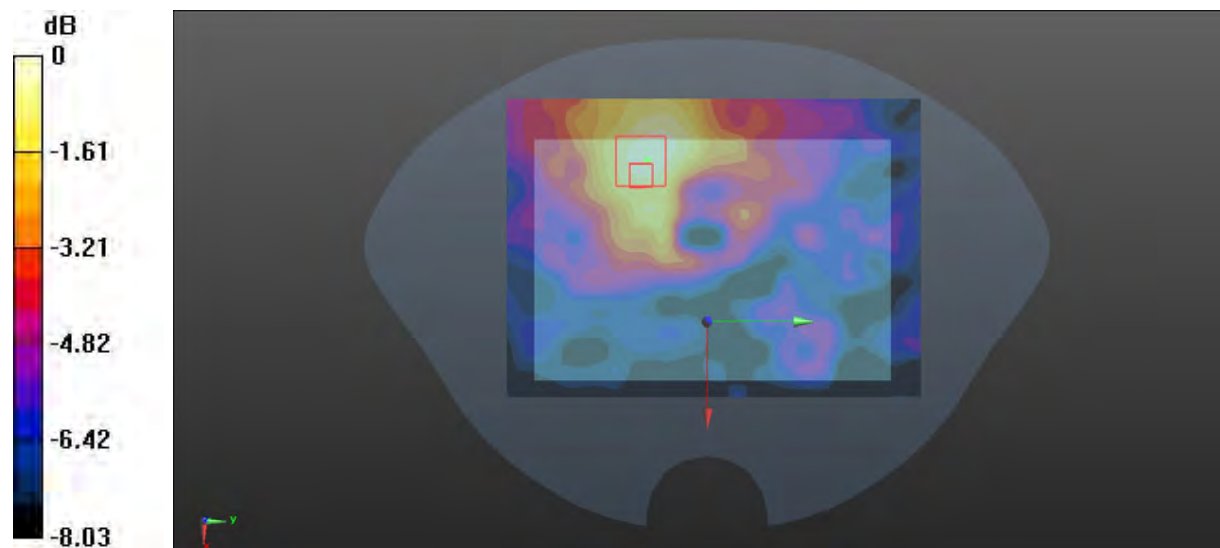

0 dB = 0.208 W/kg = -6.82 dBW/kg

**Test Plot 91#: SRD 5.8G\_1.4M Chain 1\_Mid\_Body Left****DUT: Remote Controller; Type: EFA; Serial: CR21090095-SA-S1**

Communication System: 5G SDR; Frequency: 5789 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 5789$  MHz;  $\sigma = 5.243$  S/m;  $\epsilon_r = 35.355$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(4.72, 4.72, 4.72) @ 5789 MHz; Calibrated: 2020/11/30
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2021/9/1
- Phantom: Head model; Type: QD000P40CC; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

**Area Scan (111x181x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 1.13 W/kg


**Zoom Scan (7x7x16)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=2mm

Reference Value = 3.714 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 1.42 W/kg

**SAR(1 g) = 0.673 W/kg; SAR(10 g) = 0.328 W/kg**

Maximum value of SAR (measured) = 1.19 W/kg

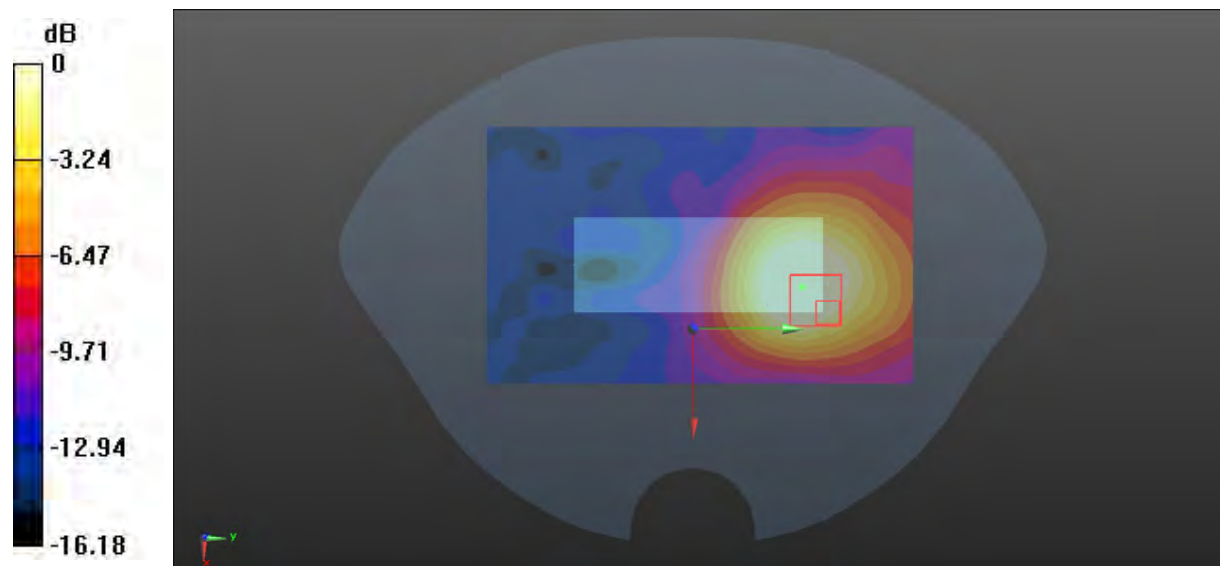

0 dB = 1.19 W/kg = 0.76 dBW/kg

**Test Plot 92#: SRD 5.8G\_1.4M Chain 1\_Mid\_Body Right****DUT: Remote Controller; Type: EFA; Serial: CR21090095-SA-S1**

Communication System: 5G SDR; Frequency: 5789 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 5789$  MHz;  $\sigma = 5.243$  S/m;  $\epsilon_r = 35.355$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(4.72, 4.72, 4.72) @ 5789 MHz; Calibrated: 2020/11/30
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2021/9/1
- Phantom: Head model; Type: QD000P40CC; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

**Area Scan (101x181x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.0991 W/kg


**Zoom Scan (7x7x16)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=2mm

Reference Value = 2.210 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.129 W/kg

**SAR(1 g) = 0.077 W/kg; SAR(10 g) = 0.060 W/kg**

Maximum value of SAR (measured) = 0.106 W/kg

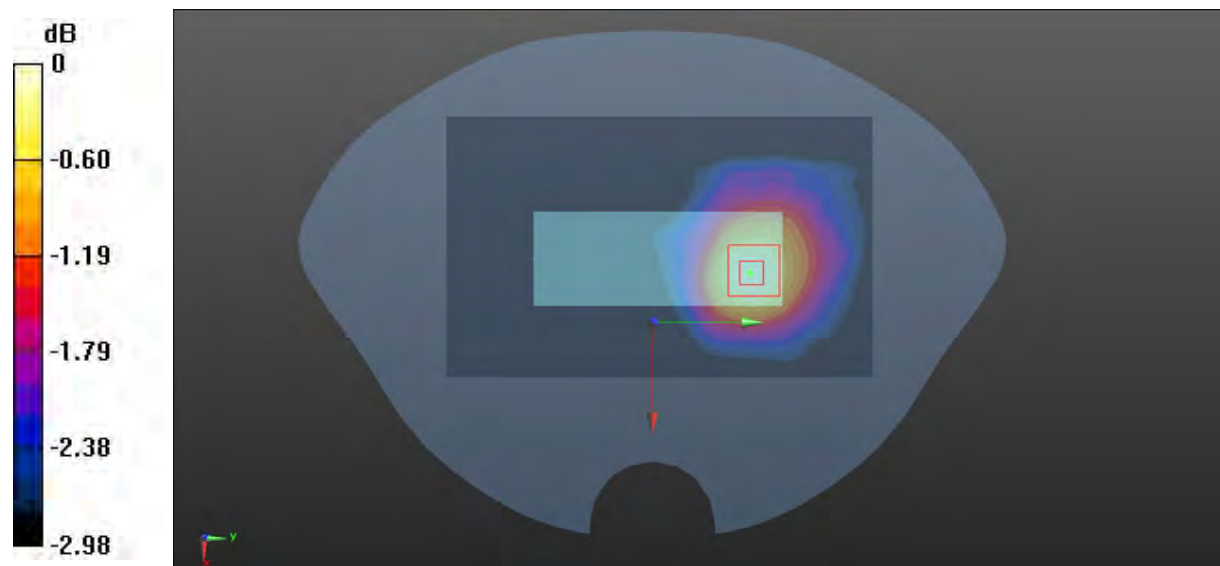

0 dB = 0.106 W/kg = -9.75 dBW/kg

**Test Plot 93#: SRD 5.8G\_1.4M Chain 1\_Low\_Body Top****DUT: Remote Controller; Type: EFA; Serial: CR21090095-SA-S1**

Communication System: 5.8G SDR Frequency: 5728 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 5728$  MHz;  $\sigma = 5.223$  S/m;  $\epsilon_r = 35.394$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(4.72, 4.72, 4.72) @ 5728 MHz; Calibrated: 2020/11/30
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2021/9/1
- Phantom: Head model; Type: QD000P40CC; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

**Area Scan (91x181x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.642 W/kg


**Zoom Scan (7x7x16)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=2mm

Reference Value = 4.287 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 0.717 W/kg

**SAR(1 g) = 0.399 W/kg; SAR(10 g) = 0.198 W/kg**

Maximum value of SAR (measured) = 0.670 W/kg

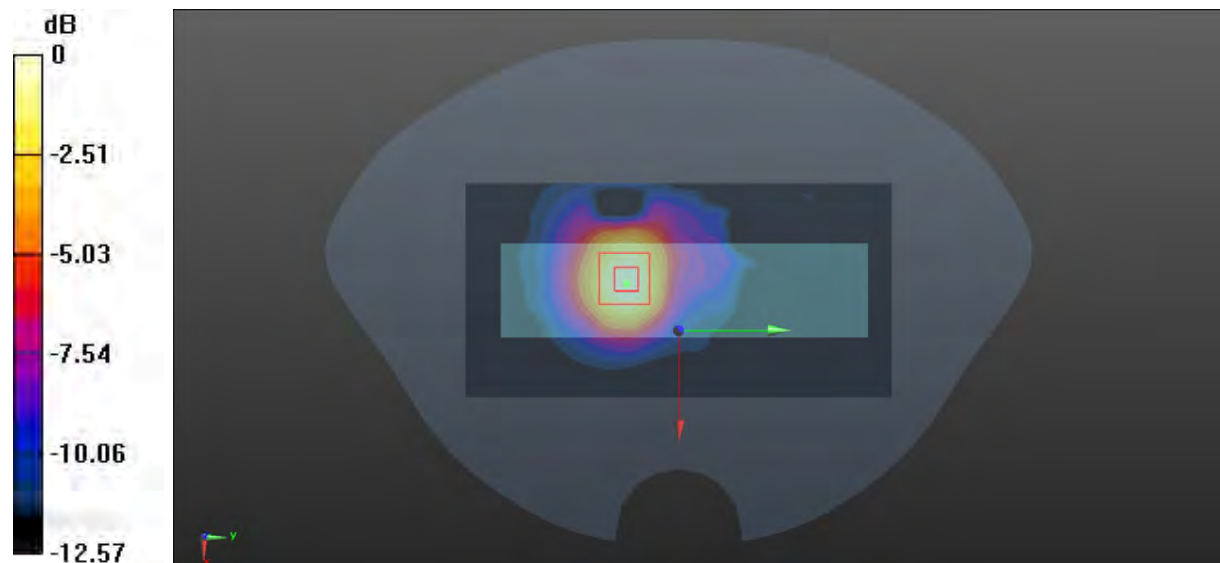

0 dB = 0.670 W/kg = -1.74 dBW/kg

**Test Plot 94#: SRD 5.8G\_1.4M Chain 1\_Mid\_Body Top****DUT: Remote Controller; Type: EFA; Serial: CR21090095-SA-S1**

Communication System: 5G SDR; Frequency: 5789 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 5789$  MHz;  $\sigma = 5.243$  S/m;  $\epsilon_r = 35.355$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(4.72, 4.72, 4.72) @ 5789 MHz; Calibrated: 2020/11/30
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2021/9/1
- Phantom: Head model; Type: QD000P40CC; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

**Area Scan (91x181x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.840 W/kg


**Zoom Scan (7x7x16)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=2mm

Reference Value = 4.790 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 1.00 W/kg

**SAR(1 g) = 0.686 W/kg; SAR(10 g) = 0.321 W/kg**

Maximum value of SAR (measured) = 0.873 W/kg

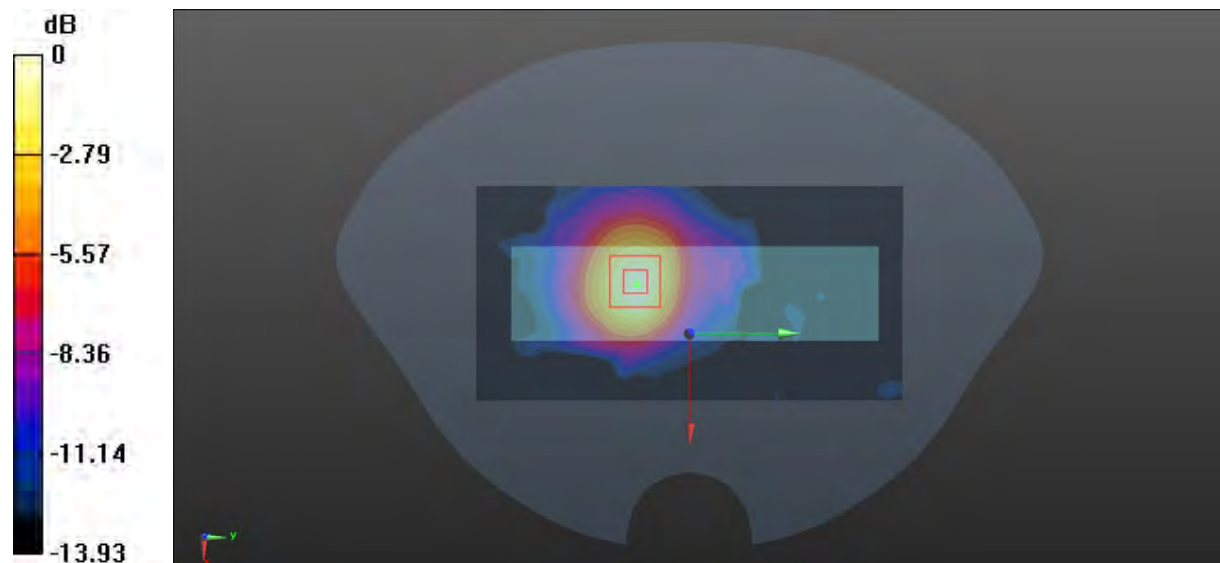

0 dB = 0.873 W/kg = -0.59 dBW/kg

**Test Plot 95#: SRD 5.8G\_1.4M Chain 1\_High\_Body Top****DUT: Remote Controller; Type: EFA; Serial: CR21090095-SA-S1**

Communication System:5G SDR; Frequency: 5847 MHz;Duty Cycle: 1:1

Medium parameters used:  $f = 5847$  MHz;  $\sigma = 5.294$  S/m;  $\epsilon_r = 35.161$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(4.72, 4.72, 4.72) @ 5847 MHz; Calibrated: 2020/11/30
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2021/9/1
- Phantom: Head model; Type: QD000P40CC; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

**Area Scan (91x181x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 1.30 W/kg


**Zoom Scan (7x7x16)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=2mm

Reference Value = 5.839 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 1.60 W/kg

**SAR(1 g) = 0.768 W/kg; SAR(10 g) = 0.361 W/kg**

Maximum value of SAR (measured) = 1.33 W/kg

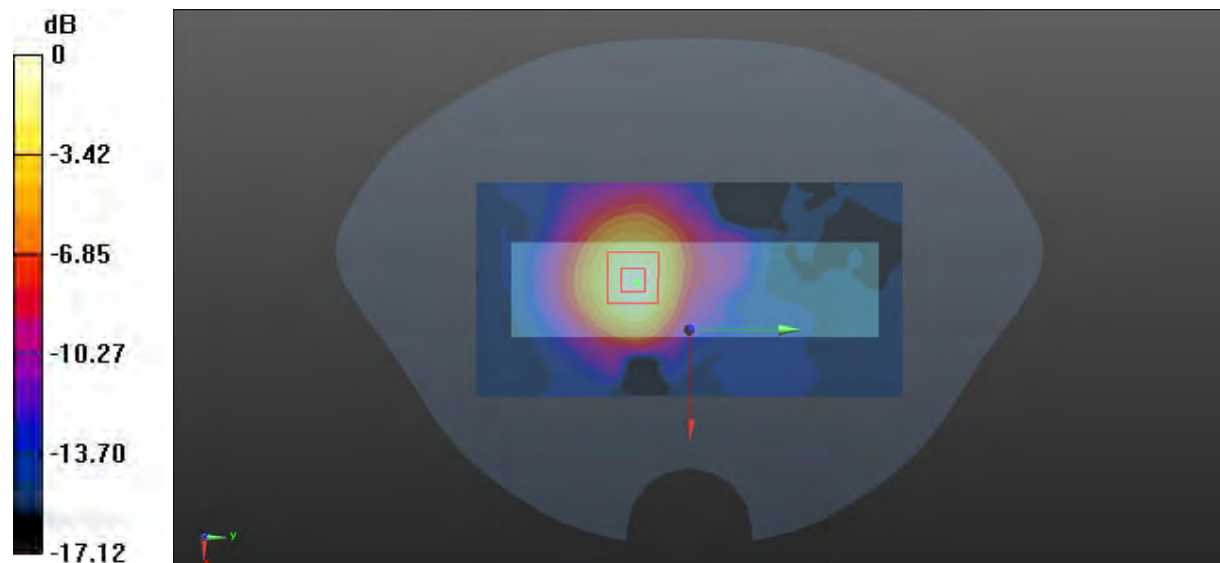

0 dB = 1.33 W/kg = 1.24 dBW/kg

**Test Plot 96#: SRD 5.8G\_20M Chain 1\_Mid\_Body Top****DUT: Remote Controller; Type: EFA; Serial: CR21090095-SA-S1**

Communication System: 5G SDR; Frequency: 5790 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 5790$  MHz;  $\sigma = 5.251$  S/m;  $\epsilon_r = 35.273$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(4.72, 4.72, 4.72) @ 5790 MHz; Calibrated: 2020/11/30
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2021/9/1
- Phantom: Head model; Type: QD000P40CC; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

**Area Scan (91x181x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 1.17 W/kg


**Zoom Scan (7x7x16)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=2mm

Reference Value = 3.012 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 1.29 W/kg

**SAR(1 g) = 0.505 W/kg; SAR(10 g) = 0.245 W/kg**

Maximum value of SAR (measured) = 1.15 W/kg

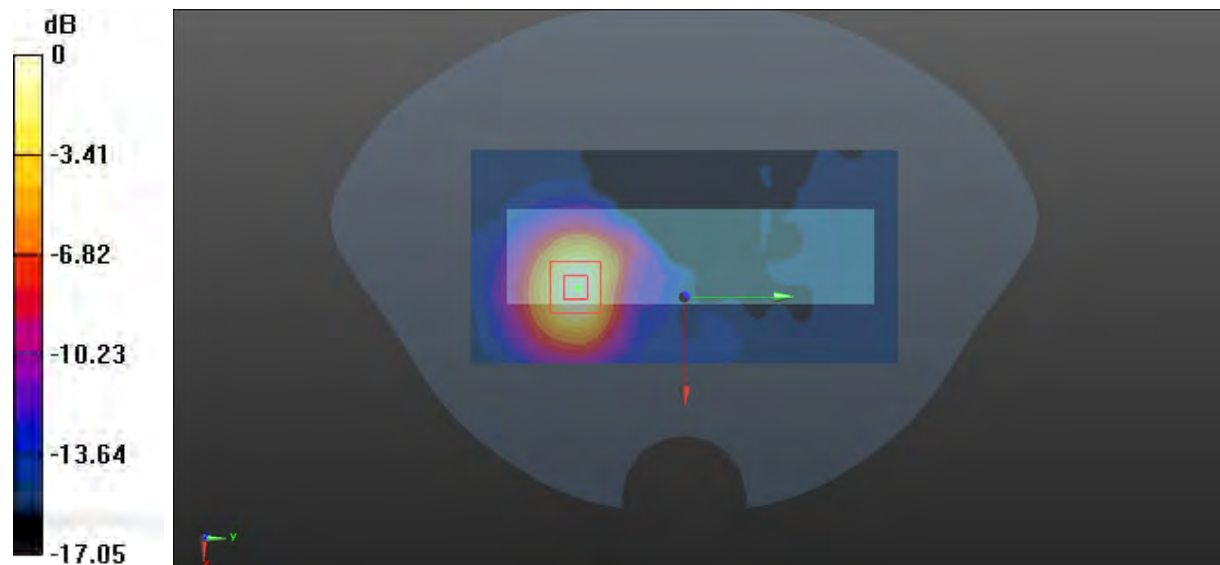

0 dB = 1.15 W/kg = 0.61 dBW/kg