



**中认信通**  
CHINA CERTIFICATION ICT CO., LTD (DONGGUAN)



## TEST REPORT

**Applicant: Autel Robotics Co., Ltd.**

Address: 18th Floor, Block C1, Nanshan iPark, No. 1001 Xueyuan Avenue,  
Nanshan District, Shenzhen, Guangdong, 518055, China

**FCC ID: 2AGNTMDX240958A**

**IC: 20910-MDX240958A**

**HVIN: MDX**

**FVIN: 1.3.24.0**

**Product Name: EVO Max**

**Standard(s): 47 CFR Part 15, Subpart C(15.247)**

**RSS-247 Issue 2, February 2017**

**RSS-Gen, Issue 5, February 2021 Amendment 2**

**ANSI C63.10-2013**

**KDB 558074 D01 15.247 Meas Guidance v05r02**

The above equipment has been tested and found compliant with the requirement of the relative standards by China Certification ICT Co., Ltd (Dongguan)

**Report Number: CR221151897-00B**

**Date Of Issue: 2023/3/10**

**Reviewed By: Sun Zhong**

*Sun Zhong*

Title: Manager

**Test Laboratory: China Certification ICT Co., Ltd (Dongguan)**

No. 113, Pingkang Road, Dalang Town, Dongguan,  
Guangdong, China

Tel: +86-769-82016888

## Test Facility

The Test site used by China Certification ICT Co., Ltd (Dongguan) to collect test data is located on the No. 113, Pingkang Road, Dalang Town, Dongguan, Guangdong, China.

The lab has been recognized as the FCC accredited lab under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 442868, the FCC Designation No. : CN1314.

The lab has been recognized by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements, the CAB identifier: CN0123.

## Declarations

China Certification ICT Co., Ltd (Dongguan) is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with a triangle symbol “▲”. Customer model name, addresses, names, trademarks etc. are not considered data.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested.

This report cannot be reproduced except in full, without prior written approval of the Company.

This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

This report may contain data that are not covered by the accreditation scope and shall be marked with an asterisk “★”.

# CONTENTS

<b>TEST FACILITY .....</b>	<b>2</b>
<b>DECLARATIONS.....</b>	<b>2</b>
<b>DOCUMENT REVISION HISTORY .....</b>	<b>5</b>
<b>1. GENERAL INFORMATION .....</b>	<b>6</b>
<b>1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT) .....</b>	<b>6</b>
<b>1.2 DESCRIPTION OF TEST CONFIGURATION.....</b>	<b>10</b>
1.2.1 EUT Operation Condition: .....	10
1.2.2 Support Equipment List and Details .....	10
1.2.3 Support Cable List and Details .....	10
1.2.4 Block Diagram of Test Setup.....	11
<b>1.3 MEASUREMENT UNCERTAINTY .....</b>	<b>12</b>
<b>2. SUMMARY OF TEST RESULTS .....</b>	<b>13</b>
<b>3. REQUIREMENTS AND TEST PROCEDURES .....</b>	<b>14</b>
<b>3.1 AC LINE CONDUCTED EMISSIONS.....</b>	<b>14</b>
3.1.1 Applicable Standard.....	14
3.1.2 EUT Setup.....	16
3.1.3 EMI Test Receiver Setup .....	16
3.1.4 Test Procedure .....	17
3.1.5 Corrected Amplitude & Margin Calculation.....	17
<b>3.2 RADIATION SPURIOUS EMISSIONS.....</b>	<b>18</b>
3.2.1 Applicable Standard.....	18
3.2.2 EUT Setup.....	18
3.2.3 EMI Test Receiver & Spectrum Analyzer Setup .....	19
3.2.4 Test Procedure .....	19
3.2.5 Corrected Amplitude & Margin Calculation.....	20
<b>3.3 6 DB EMISSION BANDWIDTH:.....</b>	<b>21</b>
3.3.1 Applicable Standard.....	21
3.3.2 EUT Setup.....	21
3.3.3 Test Procedure .....	21
<b>3.4 99% OCCUPIED BANDWIDTH: .....</b>	<b>22</b>
3.4.1 Applicable Standard.....	22
3.4.2 EUT Setup.....	22
3.4.3 Test Procedure .....	22
<b>3.5 MAXIMUM CONDUCTED OUTPUT POWER:.....</b>	<b>23</b>
3.5.1 Applicable Standard.....	23
3.5.2 EUT Setup.....	23
3.5.3 Test Procedure .....	23
<b>3.6 MAXIMUM POWER SPECTRAL DENSITY: .....</b>	<b>24</b>
3.6.1 Applicable Standard.....	24
3.6.2 EUT Setup.....	24
3.6.3 Test Procedure .....	24

<b>3.7 100 KHZ BANDWIDTH OF FREQUENCY BAND EDGE:</b>	<b>25</b>
3.7.1 Applicable Standard	25
3.7.2 EUT Setup	25
3.7.3 Test Procedure	25
<b>3.8 DUTY CYCLE:</b>	<b>26</b>
3.8.1 EUT Setup	26
3.8.2 Test Procedure	26
<b>3.9 ANTENNA REQUIREMENT</b>	<b>27</b>
3.9.1 Applicable Standard	27
3.9.2 Judgment	27
<b>4. Test DATA AND RESULTS</b>	<b>28</b>
<b>4.1 AC LINE CONDUCTED EMISSIONS</b>	<b>28</b>
<b>4.2 RADIATION SPURIOUS EMISSIONS</b>	<b>29</b>
<b>4.3 6 dB EMISSION BANDWIDTH:</b>	<b>50</b>
<b>4.4 99% OCCUPIED BANDWIDTH:</b>	<b>64</b>
<b>4.5 MAXIMUM CONDUCTED OUTPUT POWER:</b>	<b>78</b>
<b>4.6 MAXIMUM POWER SPECTRAL DENSITY:</b>	<b>80</b>
<b>4.7 100 KHZ BANDWIDTH OF FREQUENCY BAND EDGE:</b>	<b>106</b>
<b>4.8 DUTY CYCLE:</b>	<b>131</b>

**DOCUMENT REVISION HISTORY**

<b>Revision Number</b>	<b>Report Number</b>	<b>Description of Revision</b>	<b>Date of Revision</b>
1.0	CR221151897-00B	Original Report	2023/3/10

## 1. GENERAL INFORMATION

### 1.1 Product Description for Equipment under Test (EUT)

<b>EUT Name:</b>	EVO Max
<b>EUT Model:</b>	MDX
<b>Operation Frequency:</b>	SRD 1.4MHz: 904-926 MHz, 2403.5-2475.5 MHz SRD 10MHz: 909-921 MHz, 2407.5-2471.5 MHz SRD 20MHz: 914-916 MHz, 2412.5-2462.5 MHz
<b>Maximum Average Output Power (Conducted):</b>	SRD-900MHz: 26.68 dBm SRD-2.4GHz: 27.19 dBm
<b>Modulation Type:</b>	QPSK ,16QAM
<b>Rated Input Voltage:</b>	DC 14.88V from Battery
<b>Serial Number:</b>	1QAT-13
<b>EUT Received Date:</b>	2022/11/09
<b>EUT Received Status:</b>	Good

### Operation Frequency Detail: For SRD-900MHz band 1.4MHz Bandwidth Mode:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	904	13	916
2	905	14	917
3	906	15	918
...	...	...	...
...	...	22	925
11	914	23	926
12	915	/	/

Per section 15.31(m)/RSS-Gen, the below frequencies were performed the test as below:

Test Channel	Frequency (MHz)
Lowest	904
Middle	916
Highest	926

**For SRD-900MHz band 10MHz Bandwidth Mode:**

Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	909	8	916
2	910	9	917
3	911	10	918
4	912	11	919
5	913	12	920
6	914	13	921
7	915	/	/

Per section 15.31(m)/RSS-Gen, the below frequencies were performed the test as below:

Test Channel	Frequency (MHz)
Lowest	909
Middle	915
Highest	921

**For SRD-900MHz band 20MHz Bandwidth Mode:**

Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	914	3	916
2	915	/	/

Per section 15.31(m)/RSS-Gen, the below frequencies were performed the test as below:

Test Channel	Frequency (MHz)
Lowest	914
Highest	916

**For SRD-2.4GHz band 1.4MHz Bandwidth Mode:**

Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2403.5	38	2440.5
2	2404.5	39	2441.5
3	2405.5	40	2442.5
...	...	...	...
...	...	72	2474.5
36	2438.5	73	2475.5
37	2439.5	/	/

Per section 15.31(m)/RSS-Gen, the below frequencies were performed the test as below:

Test Channel	Frequency (MHz)
Lowest	2403.5
Middle	2439.5
Highest	2475.5

**For SRD-2.4GHz band 10MHz Bandwidth Mode:**

Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2407.5	34	2440.5
2	2408.5	35	2441.5
3	2409.5	36	2442.5
...	...	...	...
...	...	64	2470.5
32	2438.5	65	2471.5
33	2439.5	/	/

Per section 15.31(m)/RSS-Gen, the below frequencies were performed the test as below:

Test Channel	Frequency (MHz)
Lowest	2407.5
Middle	2439.5
Highest	2471.5

**For SRD-2.4GHz band 20MHz Bandwidth Mode:**

Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412.5	27	2438.5
2	2413.5	28	2439.5
3	2414.5	29	2440.5
...	...	...	...
...	...	50	2461.5
25	2436.5	51	2462.5
26	2437.5	/	/

Per section 15.31(m)/RSS-Gen, the below frequencies were performed the test as below:

Test Channel	Frequency (MHz)
Lowest	2412.5
Middle	2437.5
Highest	2462.5



**Antenna Information Detail ▲:**

Antenna Chain	Manufacturer	Antenna Type	input impedance (Ohm)	Frequency Range	Antenna Gain
0 (Tx&Rx)	Autel Robotics Co., Ltd.	PCB	50	902-928 MHz	0.3 dBi
				2400-2483.5 MHz	1.7 dBi
				5150-5250 MHz	-1.6 dBi
				5725-5850 MHz	0.8 dBi
1 (Rx Only)		PCB	50	902-928 MHz	1.1 dBi
				2400-2483.5 MHz	1.5 dBi
				5150-5250 MHz	4.2 dBi
				5725-5850 MHz	3.3 dBi
2 (Tx&Rx)		PCB	50	902-928 MHz	-0.8 dBi
				2400-2483.5 MHz	1.9 dBi
				5150-5250 MHz	0.7 dBi
				5725-5850 MHz	0.9 dBi
3 (Rx Only)	PCB	50	902-928 MHz	1.8 dBi	
			2400-2483.5 MHz	1.2 dBi	
			5150-5250 MHz	3.0 dBi	
			5725-5850 MHz	3.9 dBi	

The Method of §15.203 Compliance:

- Antenna must be permanently attached to the unit.  
 Antenna must use a unique type of connector to attach to the EUT.  
 Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

**Accessory Information:**

Accessory Description	Manufacturer	Model
Adapter	Shenzhen Esun Power Technology Co.,Ltd	MDX120W

## 1.2 Description of Test Configuration

### 1.2.1 EUT Operation Condition:

<b>EUT Operation Mode:</b>	The system was configured for testing in Engineering Mode, which was provided by the manufacturer. The device only supports MIMO mode 2Tx4Rx.
<b>Equipment Modifications:</b>	No
<b>EUT Exercise Software:</b>	RRTL6.0.0_VCOM

The software was provided by manufacturer. The maximum power was configured as below, that was provided by the manufacturer ▲ :

Test Modes		Power Level Setting					
		Lowest Channel		Middle Channel		Highest Channel	
		Chain 0	Chain 2	Chain 0	Chain 2	Chain 0	Chain 2
900MHz Band QPSK	1.4M	65	65	65	65	65	65
	10M	40	40	40	40	40	40
	20M	40	40	/	/	40	40
900MHz Band 16QAM	1.4M	60	60	65	65	62	62
	10M	40	40	40	40	40	40
	20M	40	40	/	/	40	40
2.4GHz Band QPSK	1.4M	35	35	35	35	35	35
	10M	50	50	50	50	50	50
	20M	57	57	57	57	57	57
2.4GHz Band 16QAM	1.4M	35	35	35	35	35	35
	10M	35	35	37	37	35	35
	20M	57	57	50	50	50	50

### 1.2.2 Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
/	/	/	/

### 1.2.3 Support Cable List and Details

Cable Description	Shielding Type	Ferrite Core	Length (m)	From Port	To
/	/	/	/	/	/

### 1.2.4 Block Diagram of Test Setup

Spurious Emissions:

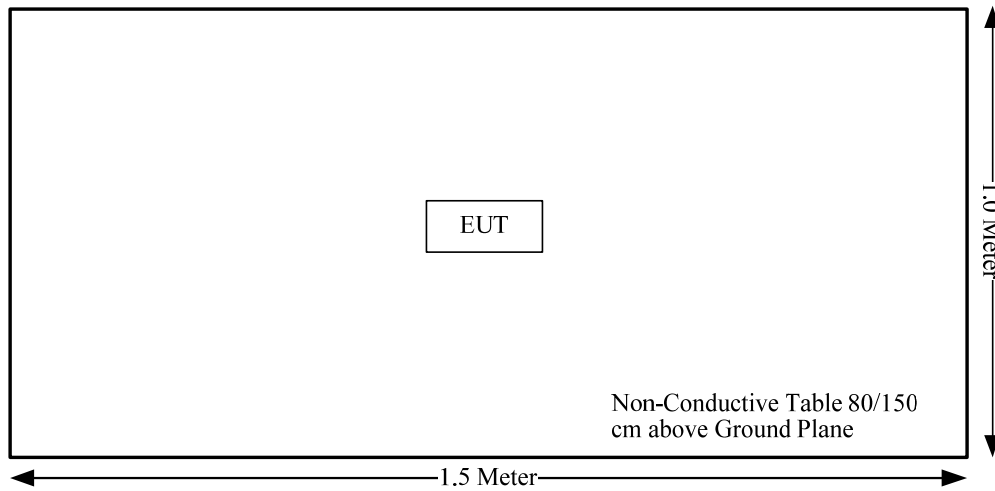

### 1.3 Measurement Uncertainty

Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty. The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval.

Parameter	Measurement Uncertainty
Occupied Channel Bandwidth	±5 %
RF output power, conducted	±0.61dB
Power Spectral Density, conducted	±0.61 dB
Unwanted Emissions, radiated	30M~200MHz: 4.15 dB,200M~1GHz: 5.61 dB,1G~6GHz: 5.14 dB, 6G~18GHz: 5.93 dB,18G~26.5G:5.47 dB,26.5G~40G:5.63 dB
Unwanted Emissions, conducted	±1.26 dB
Temperature	±1 °C
Humidity	±5%
DC and low frequency voltages	±0.4%
Duty Cycle	1%
AC Power Lines Conducted Emission	2.8 dB (150 kHz to 30 MHz)

## 2. SUMMARY OF TEST RESULTS

Standard(s) Section	Test Items	Result
§15.207(a) RSS-Gen Clause 8.8	AC line conducted emissions	Not Applicable
§15.205, §15.209, §15.247(d) RSS-Gen Clause 8.10	Spurious Emissions	Compliant
§15.247 (a)(2) RSS-247 Clause 5.2 a)	6 dB Bandwidth	Compliant
RSS-Gen Clause 6.7	99% Occupied Bandwidth	Compliant
§15.247(b)(3) RSS-247 Clause 5.4 d)	Maximum Conducted Output Power	Compliant
§15.247(d) RSS-247 Clause 5.5	100 kHz Bandwidth of Frequency Band Edge	Compliant
§15.247(e) RSS-247 Clause 5.2 b)	Power Spectral Density	Compliant
§15.203 RSS-GEN Clause 6.8	Antenna Requirement	Compliant

### 3. REQUIREMENTS AND TEST PROCEDURES

#### 3.1 AC Line Conducted Emissions

##### 3.1.1 Applicable Standard

FCC§15.207(a).

(a) Except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50  $\mu$ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

Frequency of emission (MHz)	Conducted limit (dB $\mu$ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\*Decreases with the logarithm of the frequency.

(b) The limit shown in paragraph (a) of this section shall not apply to carrier current systems operating as intentional radiators on frequencies below 30 MHz. In lieu thereof, these carrier current systems shall be subject to the following standards:

(1) For carrier current system containing their fundamental emission within the frequency band 535-1705 kHz and intended to be received using a standard AM broadcast receiver: no limit on conducted emissions.

(2) For all other carrier current systems: 1000  $\mu$ V within the frequency band 535-1705 kHz, as measured using a 50  $\mu$ H/50 ohms LISN.

(3) Carrier current systems operating below 30 MHz are also subject to the radiated emission limits in §15.205, §15.209, §15.221, §15.223, or §15.227, as appropriate.

(c) Measurements to demonstrate compliance with the conducted limits are not required for devices which only employ battery power for operation and which do not operate from the AC power lines or contain provisions for operation while connected to the AC power lines. Devices that include, or make provisions for, the use of battery chargers which permit operating while charging, AC adapters or battery eliminators or that connect to the AC power lines indirectly, obtaining their power through another device which is connected to the AC power lines, shall be tested to demonstrate compliance with the conducted limits.

## RSS-Gen Clause 8.8

Unless stated otherwise in the applicable RSS, for radio apparatus that are designed to be connected to the public utility AC power network, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the range 150 kHz to 30 MHz shall not exceed the limits in table 4, as measured using a 50  $\mu$ H / 50  $\Omega$  line impedance stabilization network. This requirement applies for the radio frequency voltage measured between each power line and the ground terminal of each AC power-line mains cable of the EUT.

For an EUT that connects to the AC power lines indirectly, through another device, the requirement for compliance with the limits in table 4 shall apply at the terminals of the AC power-line mains cable of a representative support device, while it provides power to the EUT. The lower limit applies at the boundary between the frequency ranges. The device used to power the EUT shall be representative of typical applications.

**Table 4 – AC power-line conducted emissions limits**

Frequency (MHz)	Conducted limit (dB $\mu$ V)	
	Quasi-peak	Average
0.15 - 0.5	66 to 56 <sup>1</sup>	56 to 46 <sup>1</sup>
0.5 – 5	56	46
5 – 30	60	50


**Note 1:** The level decreases linearly with the logarithm of the frequency.

For an EUT with a permanent or detachable antenna operating between 150 kHz and 30 MHz, the AC power-line conducted emissions must be measured using the following configurations:

(a) Perform the AC power-line conducted emissions test with the antenna connected to determine compliance with the limits of table 4 outside the transmitter's fundamental emission band.

(b) Retest with a dummy load instead of the antenna to determine compliance with the limits of table 4 within the transmitter's fundamental emission band. For a detachable antenna, remove the antenna and connect a suitable dummy load to the antenna connector. For a permanent antenna, remove the antenna and terminate the RF output with a dummy load or network that simulates the antenna in the fundamental frequency band.

### 3.1.2 EUT Setup

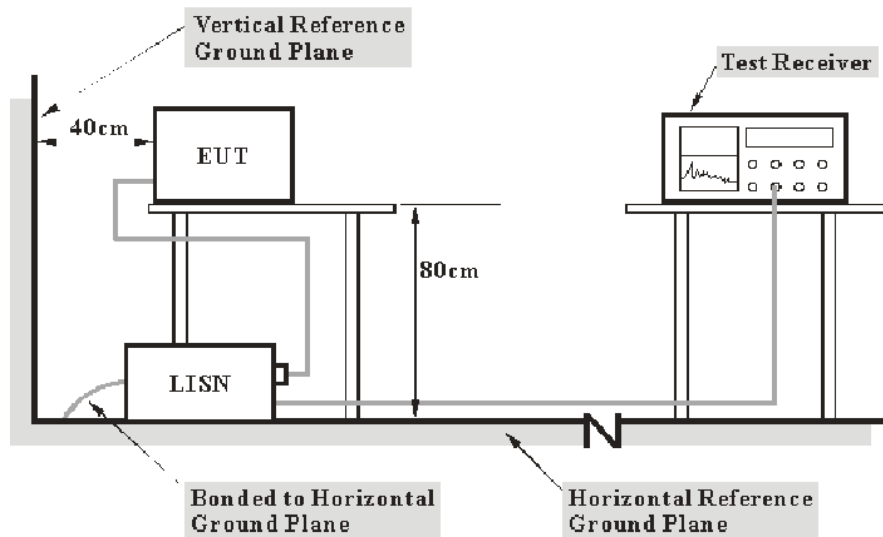

- Note: 1. Support units were connected to second LISN.  
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207, RSS-Gen limits.

The spacing between the peripherals was 10 cm.

The adapter or EUT was connected to the main LISN with a 120 V/60 Hz AC power source.

### 3.1.3 EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz



### 3.1.4 Test Procedure

The frequency and amplitude of the six highest ac power-line conducted emissions relative to the limit, measured over all the current-carrying conductors of the EUT power cords, and the operating frequency or frequency to which the EUT is tuned (if appropriate), should be reported, unless such emissions are more than 20 dB below the limit. AC power-line conducted emissions measurements are to be separately carried out only on each of the phase (“hot”) line(s) and (if used) on the neutral line(s), but not on the ground [protective earth] line(s). If less than six emission frequencies are within 20 dB of the limit, then the noise level of the measuring instrument at representative frequencies should be reported. The specific conductor of the power-line cord for each of the reported emissions should be identified. Measure the six highest emissions with respect to the limit on each current-carrying conductor of each power cord associated with the EUT (but not the power cords of associated or peripheral equipment that are part of the test configuration). Then, report the six highest emissions with respect to the limit from among all the measurements identifying the frequency and specific current-carrying conductor identified with the emission. The six highest emissions should be reported for each of the current-carrying conductors, or the six highest emissions may be reported over all the current-carrying conductors.

### 3.1.5 Corrected Amplitude & Margin Calculation

The basic equation is as follows:

Result = Reading + Factor

Factor = attenuation caused by cable loss + voltage division factor of AMN

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. The equation for margin calculation is as follows:

Margin = Limit – Result

## 3.2 Radiation Spurious Emissions

### 3.2.1 Applicable Standard

FCC §15.247 (d);


In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

RSS-247 Clause 5.5


In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of root-mean-square averaging over a time interval, as permitted under section 5.4(d), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general field strength limits specified in RSS-Gen is not required

### 3.2.2 EUT Setup

Below 1GHz:

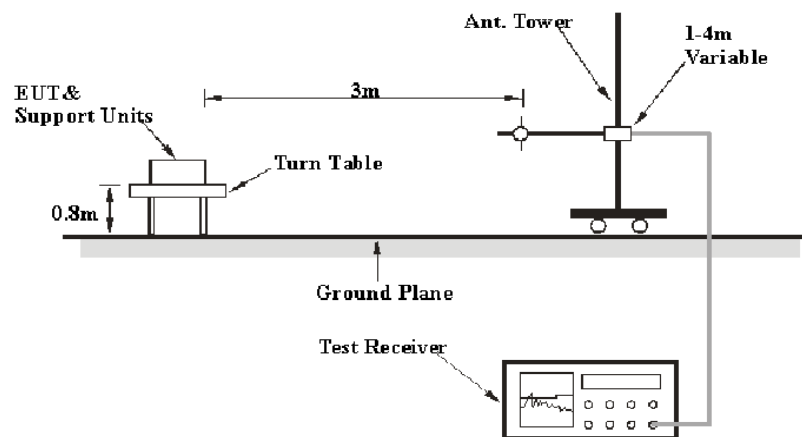

**Above 1GHz:**

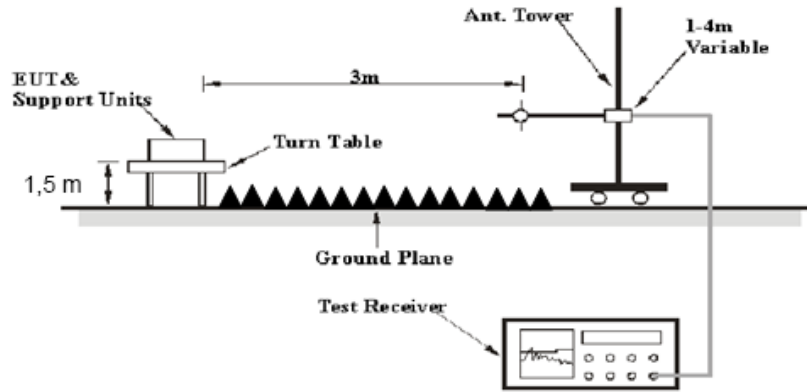

The radiated emissions were performed in the 3 meters distance, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209, and FCC 15.247,RSS-247,RSS-Gen limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

**3.2.3 EMI Test Receiver & Spectrum Analyzer Setup**

The system was investigated from 30 MHz to 25 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

30-1000MHz:

Detector	RBW	Video B/W	IF B/W
QP	120 kHz	300 kHz	120kHz

1GHz- 25GHz:

Measurement	Duty cycle	RBW	Video B/W
PK	Any	1MHz	3 MHz
AV	>98%	1MHz	10 Hz
	<98%	1MHz	1/T

Note: T is minimum transmission duration

If the maximized peak measured value complies with under the QP/Average limit more than 6dB, then it is unnecessary to perform an QP/Average measurement.

**3.2.4 Test Procedure**

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz-1 GHz, peak and Average detection modes for frequencies above 1 GHz.

### 3.2.5 Corrected Amplitude & Margin Calculation

The basic equation is as follows:

$$\text{Result} = \text{Reading} + \text{Factor}$$

$$\text{Factor} = \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Result}$$

### 3.3 6 dB Emission Bandwidth:

#### 3.3.1 Applicable Standard


FCC §15.247 (a)(2)

Systems using digital modulation techniques may operate in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

RSS-247 Clause 5.2 a

The minimum 6 dB bandwidth shall be 500 kHz.

#### 3.3.2 EUT Setup

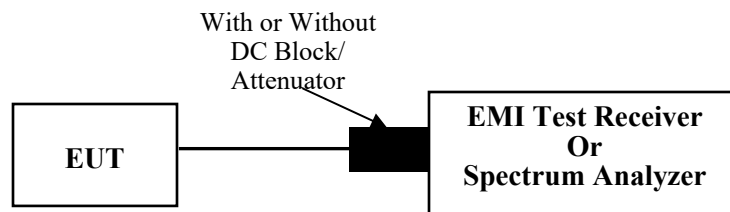

#### 3.3.3 Test Procedure

According to ANSI C63.10-2013 Section 11.8

- a) Set RBW = 100 kHz.
- b) Set the video bandwidth (VBW)  $\geq 3 \times$  RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

### 3.4 99% Occupied Bandwidth:


#### 3.4.1 Applicable Standard

RSS-Gen Clause 6.7

The occupied bandwidth or the “99% emission bandwidth” is defined as the frequency range between two points, one above and the other below the carrier frequency, within which 99% of the total transmitted power of the fundamental transmitted emission is contained. The occupied bandwidth shall be reported for all equipment in addition to the specified bandwidth required in the applicable RSSs.

In some cases, the “x dB bandwidth” is required, which is defined as the frequency range between two points, one at the lowest frequency below and one at the highest frequency above the carrier frequency, at which the maximum power level of the transmitted emission is attenuated x dB below the maximum in-band power level of the modulated signal, where the two points are on the outskirts of the in-band emission.

#### 3.4.2 EUT Setup

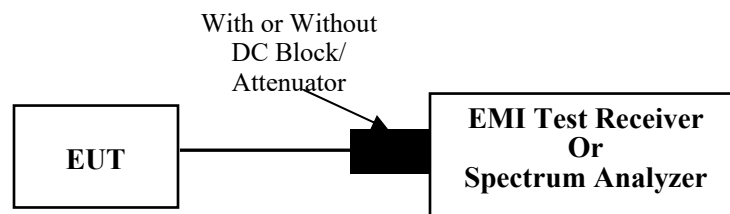

#### 3.4.3 Test Procedure

According to ANSI C63.10-2013 Section 6.9.3

The occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5% of the total mean power of the given emission.

The following procedure shall be used for measuring 99% power bandwidth:

- a) The instrument center frequency is set to the nominal EUT channel center frequency. The frequency span for the spectrum analyzer shall be between 1.5 times and 5.0 times the OBW.
- b) The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1% to 5% of the OBW, and VBW shall be approximately three times the RBW, unless otherwise specified by the applicable requirement.
- c) Set the reference level of the instrument as required, keeping the signal from exceeding the maximum input mixer level for linear operation. In general, the peak of the spectral envelope shall be more than  $[10 \log (OBW/RBW)]$  below the reference level. Specific guidance is given in 4.1.5.2.
- d) Step a) through step c) might require iteration to adjust within the specified range.
- e) Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used.
- f) Use the 99% power bandwidth function of the instrument (if available) and report the measured bandwidth.
- g) If the instrument does not have a 99% power bandwidth function, then the trace data points are recovered and directly summed in linear power terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached; that frequency is recorded as the lower frequency. The process is repeated until 99.5% of the total is reached; that frequency is recorded as the upper frequency. The 99% power bandwidth is the difference between these two frequencies.
- h) The occupied bandwidth shall be reported by providing plot(s) of the measuring instrument display; the plot axes and the scale units per division shall be clearly labeled. Tabular data may be reported in addition to the plot(s).

### 3.5 Maximum conducted output power:

#### 3.5.1 Applicable Standard


FCC §15.247 (b)(3)

For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

RSS-247 Clause 5.4 d

For DTSs employing digital modulation techniques operating in the bands 902-928 MHz and 2400-2483.5 MHz, the maximum peak conducted output power shall not exceed 1W. The e.i.r.p. shall not exceed 4 W, except as provided in section 5.4(e).

#### 3.5.2 EUT Setup

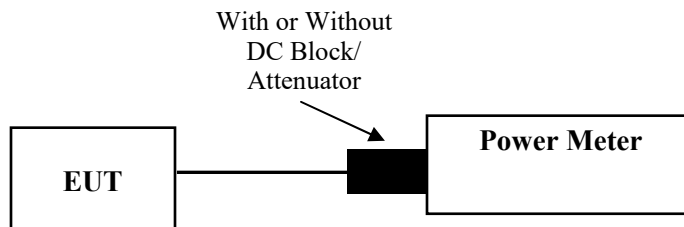

#### 3.5.3 Test Procedure

According to ANSI C63.10-2013 Section 11.9.2.3.2

Method AVGPM-G is a measurement using a gated RF average power meter.

Alternatively, measurements may be performed using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Because the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

### 3.6 Maximum power spectral density:

#### 3.6.1 Applicable Standard


FCC §15.247 (e)

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

RSS-247 Clause 5.2 b

The transmitter power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of section 5.4(d), (i.e. the power spectral density shall be determined using the same method as is used to determine the conducted output power).

#### 3.6.2 EUT Setup

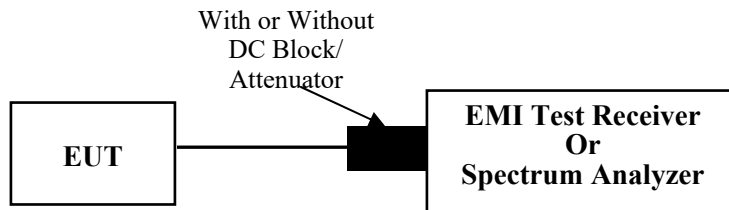

#### 3.6.3 Test Procedure

**Duty cycle  $\geq 98\%$**

According to ANSI C63.10-2013 Section 11.10.3

**Duty cycle  $< 98\%$ , duty cycle variations are less than  $\pm 2\%$**

According to ANSI C63.10-2013 Section 11.10.5

**Duty cycle  $< 98\%$ , duty cycle variations exceed  $\pm 2\%$**

According to ANSI C63.10-2013 Section 11.10.7



### 3.7 100 kHz Bandwidth of Frequency Band Edge:

#### 3.7.1 Applicable Standard


FCC §15.247 (d);

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

RSS-247 Clause 5.5

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of root-mean-square averaging over a time interval, as permitted under section 5.4(d), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general field strength limits specified in RSS-Gen is not required

#### 3.7.2 EUT Setup

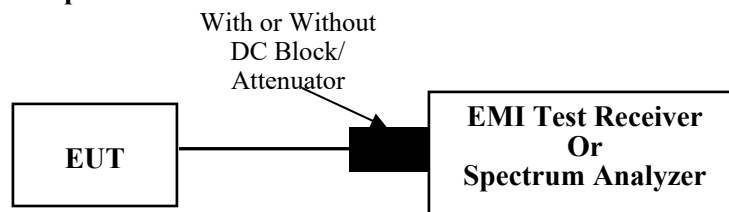

#### 3.7.3 Test Procedure


According to ANSI C63.10-2013 Section 11.11

- a) Set the center frequency and span to encompass frequency range to be measured.
- b) Set the RBW = 100 kHz.
- c) Set the VBW  $\geq [3 \times \text{RBW}]$ .
- d) Detector = peak.
- e) Sweep time = auto couple.
- f) Trace mode = max hold.
- g) Allow trace to fully stabilize.
- h) Use the peak marker function to determine the maximum amplitude level.

Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) is attenuated by at least the minimum requirements specified in 11.11. Report the three highest emissions relative to the limit.

### 3.8 Duty Cycle:

#### 3.8.1 EUT Setup

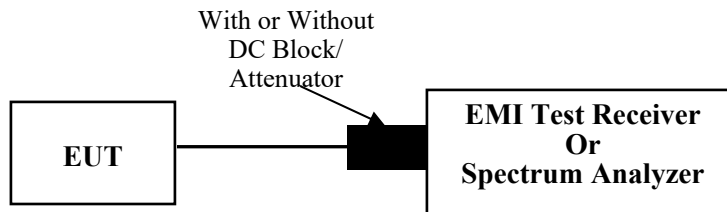

#### 3.8.2 Test Procedure

According to ANSI C63.10-2013 Section 11.6

The zero-span mode on a spectrum analyzer or EMI receiver if the response time and spacing between bins on the sweep are sufficient to permit accurate measurements of the ON and OFF times of the transmitted signal:

- 1) Set the center frequency of the instrument to the center frequency of the transmission.
- 2) Set  $RBW \geq OBW$  if possible; otherwise, set RBW to the largest available value.
- 3) Set  $VBW \geq RBW$ . Set detector = peak or average.
- 4) The zero-span measurement method shall not be used unless both RBW and VBW are  $> 50/T$  and the number of sweep points across duration T exceeds 100. (For example, if VBW and/or RBW are limited to 3 MHz, then the zero-span method of measuring the duty cycle shall not be used if  $T \leq 16.7 \mu s$ .)

## 3.9 Antenna Requirement

### 3.9.1 Applicable Standard

FCC §15.203

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §§15.211, 15.213, 15.217, 15.219, 15.221, or §15.236. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

RSS-GEN Clause 6.8

The applicant for equipment certification shall provide a list of all antenna types that may be used with the transmitter, where applicable (i.e. for transmitters with detachable antenna), indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna. The test report shall demonstrate the compliance of the transmitter with the limit for maximum equivalent isotropically radiated power (e.i.r.p.) specified in the applicable RSS, when the transmitter is equipped with any antenna type, selected from this list.

For expediting the testing, measurements may be performed using only the antenna with highest gain of each combination of transmitter and antenna type, with the transmitter output power set at the maximum level. However, the transmitter shall comply with the applicable requirements under all operational conditions and when in combination with any type of antenna from the list provided in the test report (and in the notice to be included in the user manual, provided below).

When measurements at the antenna port are used to determine the RF output power, the effective gain of the device's antenna shall be stated, based on a measurement or on data from the antenna's manufacturer.

The test report shall state the RF power, output power setting and spurious emission measurements with each antenna type that is used with the transmitter being tested.

For licence-exempt equipment with detachable antennas, the user manual shall also contain the following notice in a conspicuous location:

This radio transmitter [enter the device's ISED certification number] has been approved by Innovation, Science and Economic Development Canada to operate with the antenna types listed below, with the maximum permissible gain indicated. Antenna types not included in this list that have a gain greater than the maximum gain indicated for any type listed are strictly prohibited for use with this device.

Immediately following the above notice, the manufacturer shall provide a list of all antenna types which can be used with the transmitter, indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna type.

### 3.9.2 Judgment

**Compliant.** Please refer to the Antenna Information detail in Section 1.

## **4. Test DATA AND RESULTS**

---

### **4.1 AC Line Conducted Emissions**

**Not Applicable**, the device was powered by battery when operating

**4.2 Radiation Spurious Emissions**

Serial Number:	1QAT-13	Test Date:	2023/12/8~2023/2/6
Test Site:	966-1,966-2	Test Mode:	Transmitting
Tester:	Mack Huang, Vic Du	Test Result:	Pass

**Environmental Conditions:**

Temperature: (°C)	20.7~22.8	Relative Humidity: (%)	50~62	ATM Pressure: (kPa)	101.5~102.5
----------------------	-----------	------------------------------	-------	------------------------	-------------

**Test Equipment List and Details:**

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Sunol Sciences	Antenna	JB6	A082520-5	2020/10/19	2023/10/18
R&S	EMI Test Receiver	ESR3	102724	2022/07/15	2023/07/14
TIMES MICROWAVE	Coaxial Cable	LMR-600-UltraFlex	C-0470-02	2022/07/17	2023/07/16
TIMES MICROWAVE	Coaxial Cable	LMR-600-UltraFlex	C-0780-01	2022/07/17	2023/07/16
Sonoma	Amplifier	310N	186165	2022/07/17	2023/07/16
Audix	Test Software	E3	201021 (V9)	N/A	N/A
ETS-Lindgren	Horn Antenna	3115	9912-5985	2020/10/13	2023/10/12
R&S	Spectrum Analyzer	FSV40	101591	2022/07/15	2023/07/14
MICRO-COAX	Coaxial Cable	UFA210A-1-1200-70U300	217423-008	2022/08/07	2023/08/06
MICRO-COAX	Coaxial Cable	UFA210A-1-2362-300300	235780-001	2022/08/07	2023/08/06
Mini	Pre-amplifier	ZVA-183-S+	5969001149	2022/11/09	2023/11/08
PASTERNAK	Horn Antenna	PE9852/2F-20	112002	2021/02/05	2024/02/04
AH	Preamplifier	PAM-1840VH	190	2022/11/09	2023/11/08
MICRO-COAX	Coaxial Cable	UFB142A-1-2362-200200	235772-001	2022/08/07	2023/08/06
E-Microwave	Band Rejection Filter	2400-2483.5MHz	OE01902424	2022/08/07	2023/08/06
Mini Circuits	High Pass Filter	VHF-6010+	31119	2022/08/07	2023/08/06

\* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

**Test Data:**


Please refer to the below table and plots.

**SRD 900MHz Band:**

**30MHz-1GHz(1.4MHz Mode, 16QAM, High channel was the worst):**


Test Mode: Transmitting  
 Polarization: horizontal  
 Note:

Date: 2023-02-06

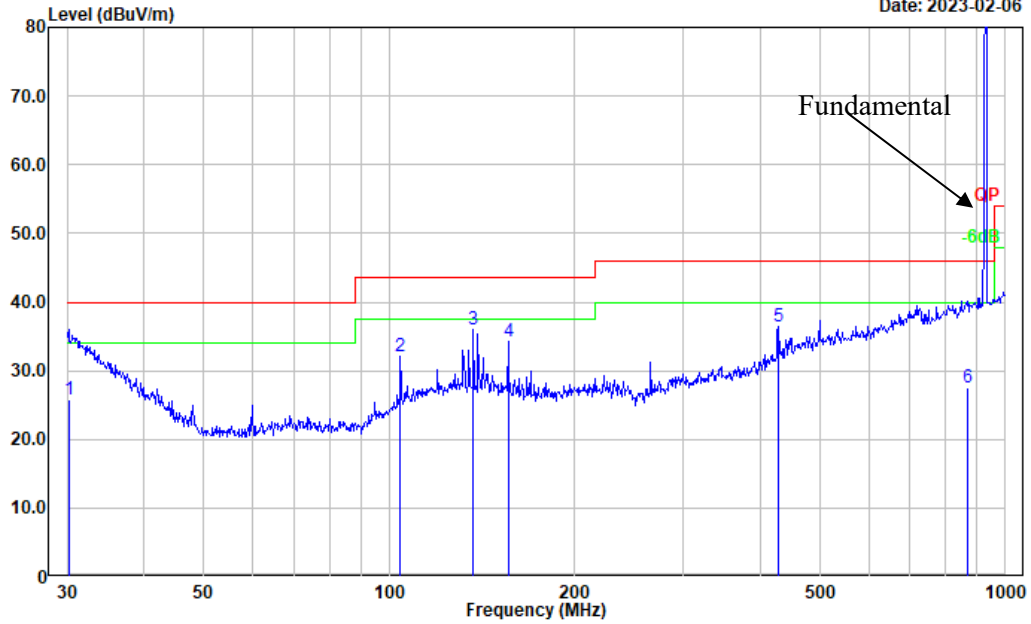

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	30.211	-1.84	27.72	25.88	40.00	14.12	QP
2	104.170	14.12	17.99	32.11	43.50	11.39	Peak
3	136.939	16.27	19.81	36.08	43.50	7.42	Peak
4	155.910	14.84	19.33	34.17	43.50	9.33	Peak
5	428.019	12.88	23.62	36.50	46.00	9.50	Peak
6	869.130	-1.96	29.56	27.60	46.00	18.40	QP

Test Mode: Transmitting  
 Polarization: vertical  
 Note:

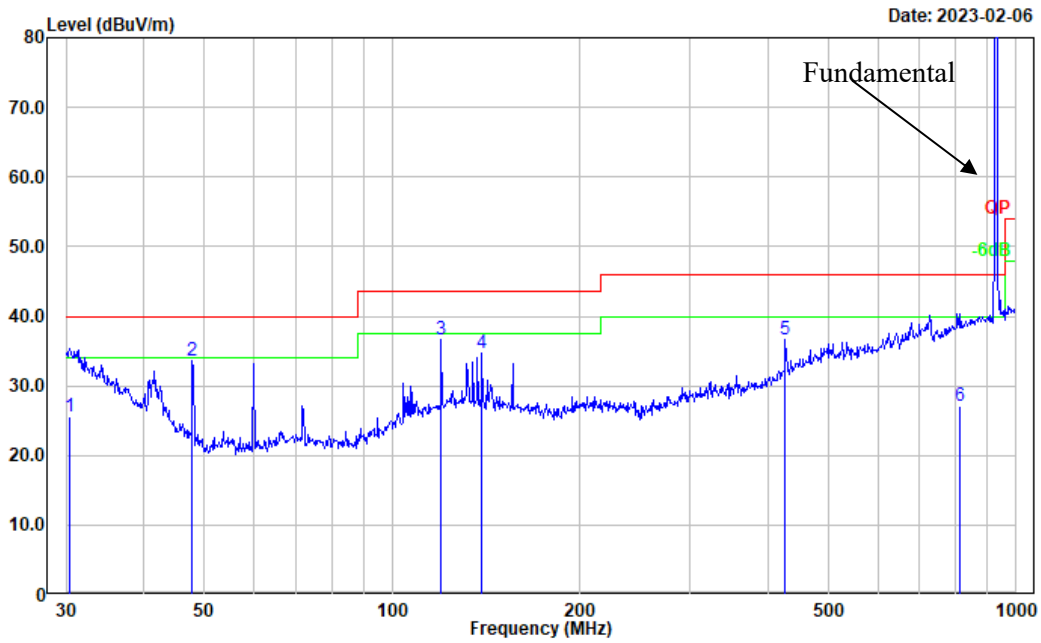

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	30.424	-1.88	27.55	25.67	40.00	14.33	QP
2	47.826	18.12	15.57	33.69	40.00	6.31	Peak
3	119.856	16.71	19.98	36.69	43.50	6.81	Peak
4	139.361	15.06	19.68	34.74	43.50	8.76	Peak
5	426.521	13.20	23.54	36.74	46.00	9.26	Peak
6	813.112	-2.00	29.12	27.12	46.00	18.88	QP

**1GHz-10GHz  
1.4MHz, QPSK:**

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
	Reading (dB $\mu$ V)	Detector					
Low Channel: 904MHz							
904.00	82.90	QP	H	29.47	112.37	N/A	N/A
904.00	83.03	QP	V	29.47	112.50	N/A	N/A
902.00	28.00	QP	V	29.46	57.46	92.50	35.04
1808.000	62.01	PK	H	1.33	63.34	74.00	10.66
1808.000	44.13	AV	H	1.33	45.46	54.00	8.54
1808.000	62.14	PK	V	1.33	63.47	74.00	10.53
1808.000	44.15	AV	V	1.33	45.48	54.00	8.52
2712.000	63.21	PK	H	4.77	67.98	74.00	6.02
2712.000	45.31	AV	H	4.77	50.08	54.00	3.92
2712.000	62.14	PK	V	4.77	66.91	74.00	7.09
2712.000	44.03	AV	V	4.77	48.80	54.00	5.20
Middle Channel: 916MHz							
916.00	81.76	QP	H	29.61	111.37	N/A	N/A
916.00	82.58	QP	V	29.61	112.19	N/A	N/A
1832.000	56.19	PK	H	1.44	57.63	74.00	16.37
1832.000	38.44	AV	H	1.44	39.88	54.00	14.12
1832.000	53.46	PK	V	1.44	54.90	74.00	19.10
1832.000	35.16	AV	V	1.44	36.60	54.00	17.40
2748.000	60.23	PK	H	4.92	65.15	74.00	8.85
2748.000	42.54	AV	H	4.92	47.46	54.00	6.54
2748.000	51.01	PK	V	4.92	55.93	74.00	18.07
2748.000	33.22	AV	V	4.92	38.14	54.00	15.86
High Channel: 926MHz							
926.00	81.29	QP	H	29.67	110.96	N/A	N/A
926.00	83.38	QP	V	29.67	113.05	N/A	N/A
928.00	28.95	QP	V	29.70	58.65	93.05	34.40
1852.000	51.34	PK	H	1.54	52.88	74.00	21.12
1852.000	33.76	AV	H	1.54	35.30	54.00	18.70
1852.000	46.83	PK	V	1.54	48.37	74.00	25.63
1852.000	29.01	AV	V	1.54	30.55	54.00	23.45
2778.000	65.26	PK	H	5.03	70.29	74.00	3.71
2778.000	47.72	AV	H	5.03	52.75	54.00	1.25
2778.000	47.75	PK	V	5.03	52.78	74.00	21.22
2778.000	30.03	AV	V	5.03	35.06	54.00	18.94



**16QAM:**

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
	Reading (dB $\mu$ V)	Detector					
Low Channel: 904MHz							
904.00	84.04	QP	H	29.47	113.51	N/A	N/A
904.00	84.22	QP	V	29.47	113.69	N/A	N/A
902.00	29.78	QP	V	29.46	59.24	93.69	34.45
1808.000	58.93	PK	H	1.33	60.26	74.00	13.74
1808.000	40.01	AV	H	1.33	41.34	54.00	12.66
1808.000	53.88	PK	V	1.33	55.21	74.00	18.79
1808.000	36.01	AV	V	1.33	37.34	54.00	16.66
2712.000	62.34	PK	H	4.77	67.11	74.00	6.89
2712.000	44.43	AV	H	4.77	49.20	54.00	4.80
2712.000	60.34	PK	V	4.77	65.11	74.00	8.89
2712.000	42.13	AV	V	4.77	46.90	54.00	7.10
Middle Channel: 916MHz							
916.00	81.89	QP	H	29.61	111.50	N/A	N/A
916.00	82.58	QP	V	29.61	112.19	N/A	N/A
1832.000	66.21	PK	H	1.44	67.65	74.00	6.35
1832.000	48.35	AV	H	1.44	49.79	54.00	4.21
1832.000	64.17	PK	V	1.44	65.61	74.00	8.39
1832.000	46.21	AV	V	1.44	47.65	54.00	6.35
2748.000	65.04	PK	H	4.92	69.96	74.00	4.04
2748.000	47.34	AV	H	4.92	52.26	54.00	1.74
2748.000	62.50	PK	V	4.92	67.42	74.00	6.58
2748.000	44.13	AV	V	4.92	49.05	54.00	4.95
High Channel: 926MHz							
926.00	82.36	QP	H	29.67	112.03	N/A	N/A
926.00	84.27	QP	V	29.67	113.94	N/A	N/A
928.00	33.16	QP	V	29.70	62.86	93.94	31.08
1852.000	66.50	PK	H	1.54	68.04	74.00	5.96
1852.000	48.46	AV	H	1.54	50.00	54.00	4.00
1852.000	59.20	PK	V	1.54	60.74	74.00	13.26
1852.000	41.38	AV	V	1.54	42.92	54.00	11.08
2778.000	66.45	PK	H	5.03	71.48	74.00	2.52
2778.000	48.19	AV	H	5.03	53.22	54.00	0.78
2778.000	55.83	PK	V	5.03	60.86	74.00	13.14
2778.000	38.02	AV	V	5.03	43.05	54.00	10.95

**10MHz, QPSK:**

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
	Reading (dB $\mu$ V)	Detector					
Low Channel: 909MHz							
909.00	81.29	QP	H	29.61	110.90	N/A	N/A
909.00	81.82	QP	V	29.61	111.43	N/A	N/A
902.00	43.64	QP	V	29.46	73.10	91.43	18.33
1818.000	60.38	PK	H	1.38	61.76	74.00	12.24
1818.000	47.64	AV	H	1.38	49.02	54.00	4.98
1818.000	61.27	PK	V	1.38	62.65	74.00	11.35
1818.000	48.28	AV	V	1.38	49.66	54.00	4.34
2727.000	60.21	PK	H	4.83	65.04	74.00	8.96
2727.000	47.35	AV	H	4.83	52.18	54.00	1.82
2727.000	60.93	PK	V	4.83	65.76	74.00	8.24
2727.000	47.31	AV	V	4.83	52.14	54.00	1.86
Middle Channel: 915MHz							
915.00	80.61	QP	H	29.62	110.23	N/A	N/A
915.00	81.49	QP	V	29.62	111.11	N/A	N/A
1830.000	45.68	PK	H	1.43	47.11	74.00	26.89
1830.000	32.64	AV	H	1.43	34.07	54.00	19.93
1830.000	53.16	PK	V	1.43	54.59	74.00	19.41
1830.000	40.24	AV	V	1.43	41.67	54.00	12.33
2745.000	42.88	PK	H	4.91	47.79	74.00	26.21
2745.000	30.01	AV	H	4.91	34.92	54.00	19.08
2745.000	43.26	PK	V	4.91	48.17	74.00	25.83
2745.000	30.13	AV	V	4.91	35.04	54.00	18.96
High Channel: 921MHz							
921.00	80.45	QP	H	29.58	110.03	N/A	N/A
921.00	81.39	QP	V	29.58	110.97	N/A	N/A
928.00	48.96	QP	V	29.70	78.66	90.97	12.31
1842.000	60.36	PK	H	1.49	61.85	74.00	12.15
1842.000	47.27	AV	H	1.49	48.76	54.00	5.24
1842.000	59.03	PK	V	1.49	60.52	74.00	13.48
1842.000	46.25	AV	V	1.49	47.74	54.00	6.26
2763.000	61.10	PK	H	4.97	66.07	74.00	7.93
2763.000	48.01	AV	H	4.97	52.98	54.00	1.02
2763.000	60.47	PK	V	4.97	65.44	74.00	8.56
2763.000	47.38	AV	V	4.97	52.35	54.00	1.65

**16QAM:**

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
	Reading (dB $\mu$ V)	Detector					
Low Channel: 909MHz							
909.00	81.28	QP	H	29.61	110.89	N/A	N/A
909.00	81.52	QP	V	29.61	111.13	N/A	N/A
902.00	43.23	QP	V	29.46	72.69	91.13	18.44
1818.000	60.95	PK	H	1.38	62.33	74.00	11.67
1818.000	46.01	AV	H	1.38	47.39	54.00	6.61
1818.000	61.98	PK	V	1.38	63.36	74.00	10.64
1818.000	47.68	AV	V	1.38	49.06	54.00	4.94
2727.000	61.11	PK	H	4.83	65.94	74.00	8.06
2727.000	46.35	AV	H	4.83	51.18	54.00	2.82
2727.000	62.93	PK	V	4.83	67.76	74.00	6.24
2727.000	47.80	AV	V	4.83	52.63	54.00	1.37
Middle Channel: 915MHz							
915.00	80.89	QP	H	29.62	110.51	N/A	N/A
915.00	82.02	QP	V	29.62	111.64	N/A	N/A
1830.000	63.15	PK	H	1.43	64.58	74.00	9.42
1830.000	48.56	AV	H	1.43	49.99	54.00	4.01
1830.000	59.64	PK	V	1.43	61.07	74.00	12.93
1830.000	44.57	AV	V	1.43	46.00	54.00	8.00
2745.000	63.08	PK	H	4.91	67.99	74.00	6.01
2745.000	48.14	AV	H	4.91	53.05	54.00	0.95
2745.000	59.22	PK	V	4.91	64.13	74.00	9.87
2745.000	44.26	AV	V	4.91	49.17	54.00	4.83
High Channel: 921MHz							
921.00	81.06	QP	H	29.58	110.64	N/A	N/A
921.00	81.46	QP	V	29.58	111.04	N/A	N/A
928.00	49.02	QP	V	29.70	78.72	91.04	12.32
1842.000	62.35	PK	H	1.49	63.84	74.00	10.16
1842.000	47.35	AV	H	1.49	48.84	54.00	5.16
1842.000	58.45	PK	V	1.49	59.94	74.00	14.06
1842.000	43.61	AV	V	1.49	45.10	54.00	8.90
2763.000	62.15	PK	H	4.97	67.12	74.00	6.88
2763.000	47.61	AV	H	4.97	52.58	54.00	1.42
2763.000	58.32	PK	V	4.97	63.29	74.00	10.71
2763.000	43.56	AV	V	4.97	48.53	54.00	5.47


**20MHz, QPSK:**


Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
	Reading (dB $\mu$ V)	Detector					
Low Channel: 914MHz							
914.00	79.26	QP	H	29.62	108.88	N/A	N/A
914.00	77.94	QP	V	29.62	107.56	N/A	N/A
902.00	41.42	QP	H	29.46	70.88	88.88	18.00
1828.000	63.52	PK	H	1.42	64.94	74.00	9.06
1828.000	45.72	AV	H	1.42	47.14	54.00	6.86
1828.000	61.01	PK	V	1.42	62.43	74.00	11.57
1828.000	43.11	AV	V	1.42	44.53	54.00	9.47
2742.000	63.94	PK	H	4.90	68.84	74.00	5.16
2742.000	45.89	AV	H	4.90	50.79	54.00	3.21
2742.000	58.64	PK	V	4.90	63.54	74.00	10.46
2742.000	40.72	AV	V	4.90	45.62	54.00	8.38
High Channel: 916MHz							
916.00	77.01	QP	H	29.61	106.62	N/A	N/A
916.00	78.43	QP	V	29.61	108.04	N/A	N/A
928.00	44.18	QP	V	29.70	73.88	88.04	14.16
1832.000	64.33	PK	H	1.44	65.77	74.00	8.23
1832.000	46.11	AV	H	1.44	47.55	54.00	6.45
1832.000	60.34	PK	V	1.44	61.78	74.00	12.22
1832.000	42.16	AV	V	1.44	43.60	54.00	10.40
2748.000	63.77	PK	H	4.92	68.69	74.00	5.31
2748.000	45.67	AV	H	4.92	50.59	54.00	3.41
2748.000	59.34	PK	V	4.92	64.26	74.00	9.74
2748.000	41.78	AV	V	4.92	46.70	54.00	7.30

**16QAM:**

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
	Reading (dB $\mu$ V)	Detector					
Low Channel: 914MHz							
914.00	79.22	QP	H	29.62	108.84	N/A	N/A
914.00	78.48	QP	V	29.62	108.10	N/A	N/A
902.00	39.91	QP	H	29.46	69.37	88.84	19.47
1828.000	60.78	PK	H	1.42	62.20	74.00	11.80
1828.000	47.56	AV	H	1.42	48.98	54.00	5.02
1828.000	57.92	PK	V	1.42	59.34	74.00	14.66
1828.000	44.70	AV	V	1.42	46.12	54.00	7.88
2742.000	60.46	PK	H	4.90	65.36	74.00	8.64
2742.000	47.26	AV	H	4.90	52.16	54.00	1.84
2742.000	56.76	PK	V	4.90	61.66	74.00	12.34
2742.000	43.16	AV	V	4.90	48.06	54.00	5.94
High Channel: 916MHz							
916.00	77.18	QP	H	29.61	106.79	N/A	N/A
916.00	78.20	QP	V	29.61	107.81	N/A	N/A
928.00	43.81	QP	V	29.70	73.51	87.81	14.30
1832.000	62.86	PK	H	1.44	64.30	74.00	9.70
1832.000	49.73	AV	H	1.44	51.17	54.00	2.83
1832.000	59.39	PK	V	1.44	60.83	74.00	13.17
1832.000	46.21	AV	V	1.44	47.65	54.00	6.35
2748.000	60.91	PK	H	4.92	65.83	74.00	8.17
2748.000	47.03	AV	H	4.92	51.95	54.00	2.05
2748.000	57.96	PK	V	4.92	62.88	74.00	11.12
2748.000	44.67	AV	V	4.92	49.59	54.00	4.41

**Test Plots(Worst 1.4MHz 16QAM High channel):**

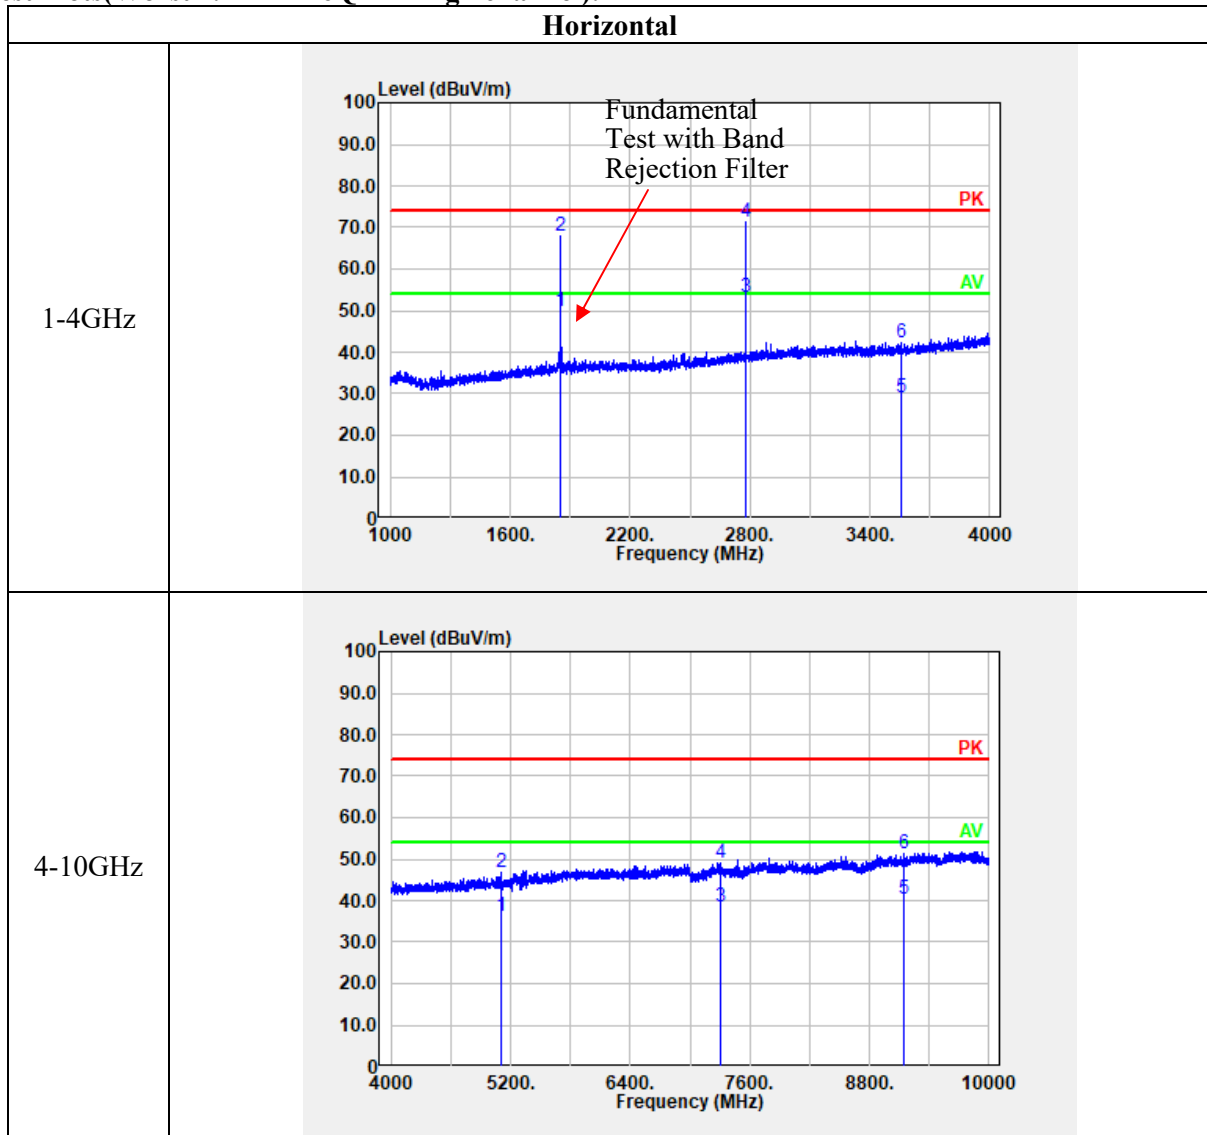

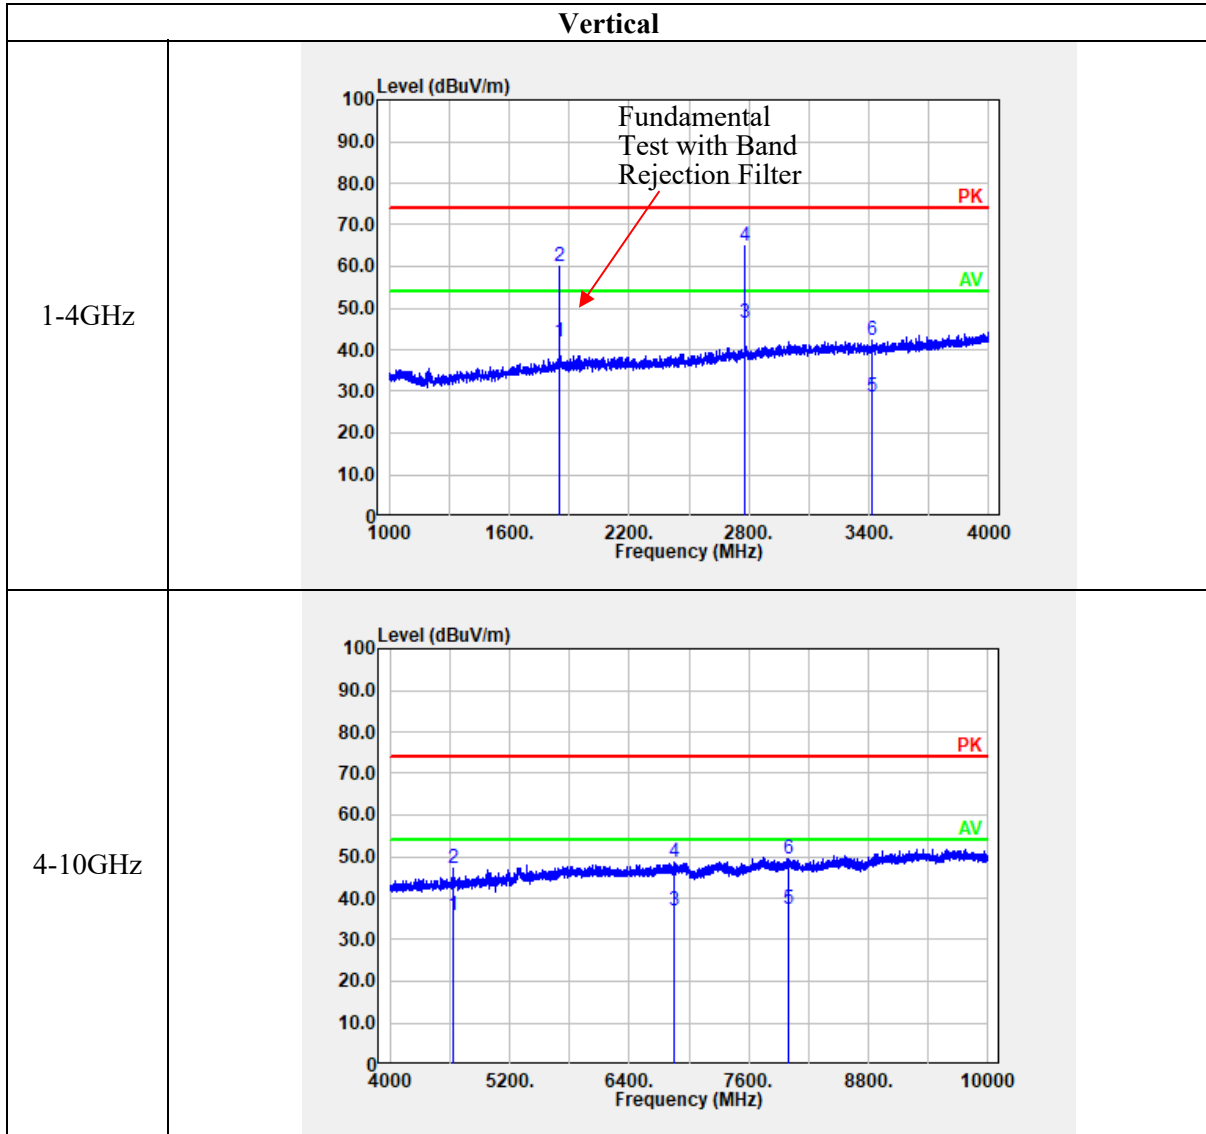


**2.4GHz Band:**

**1) 30MHz-1GHz(1.4MHz QPSK, Low channel was the worst)**

Test Mode: Transmitting  
 Polarization: vertical  
 Note:


Date: 2023-01-13

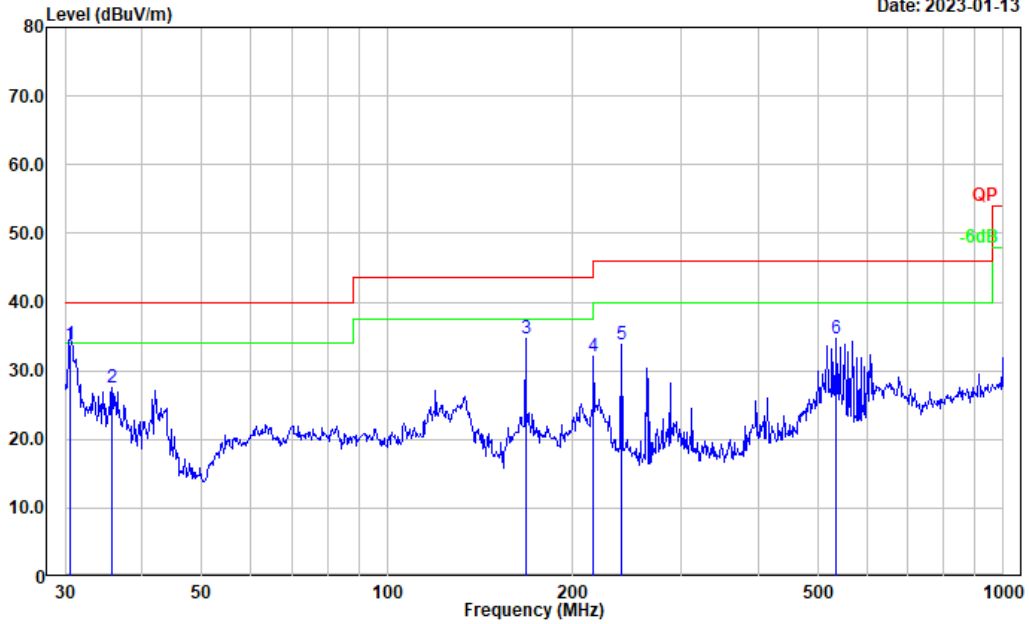

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	30.531	37.72	-4.00	33.72	40.00	6.28	QP
2	35.749	35.67	-8.05	27.62	40.00	12.38	Peak
3	167.824	47.45	-12.73	34.72	43.50	8.78	Peak
4	216.024	44.82	-12.65	32.17	46.00	13.83	Peak
5	239.987	46.80	-13.02	33.78	46.00	12.22	Peak
6	535.707	40.70	-6.01	34.69	46.00	11.31	Peak



Test Mode: Transmitting  
 Polarization: horizontal  
 Note:

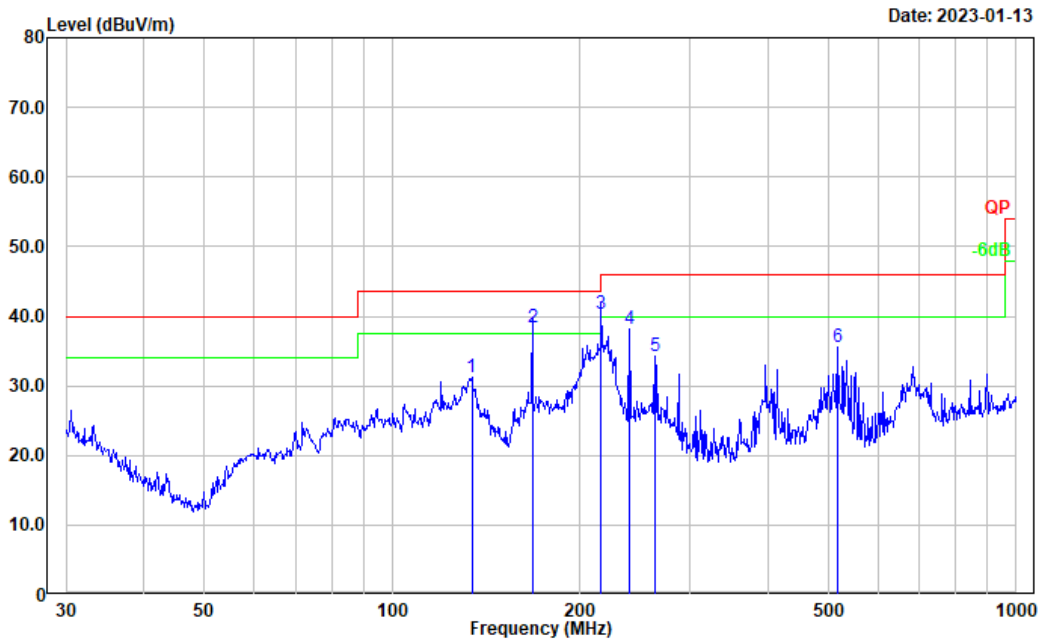

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	134.088	42.85	-11.57	31.28	43.50	12.22	Peak
2	167.824	51.13	-12.73	38.40	43.50	5.10	QP
3	216.024	53.01	-12.65	40.36	46.00	5.64	QP
4	239.987	51.08	-13.02	38.06	46.00	7.94	Peak
5	263.819	46.47	-12.31	34.16	46.00	11.84	Peak
6	517.248	41.37	-5.83	35.54	46.00	10.46	Peak

**2) 1-25GHz:****QPSK 1.4M Mode:**

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dBµV/m)	Limit (dBµV/m)	Margin (dB)
	Reading (dBµV)	Detector					
Low Channel: 2403.5 MHz							
2403.500	90.82	PK	H	31.51	122.33	N/A	N/A
2403.500	84.59	AV	H	31.51	116.10	N/A	N/A
2403.500	93.55	PK	V	31.51	125.06	N/A	N/A
2403.500	88.07	AV	V	31.51	119.58	N/A	N/A
2390.000	27.30	PK	V	31.46	58.76	74.00	15.24
2390.000	14.50	AV	V	31.46	45.96	54.00	8.04
4807.000	35.42	PK	V	10.92	46.34	74.00	27.66
4807.000	22.64	AV	V	10.92	33.56	54.00	20.44
7210.500	34.57	PK	V	14.25	48.82	74.00	25.18
7210.500	21.46	AV	V	14.25	35.71	54.00	18.29
4884.000	35.26	PK	V	11.08	46.34	74.00	27.66
4884.000	21.99	AV	V	11.08	33.07	54.00	20.93
7199.000	42.33	PK	V	14.16	56.49	74.00	17.51
7199.000	29.04	AV	V	14.16	43.20	54.00	10.80
Middle Channel: 2439.5 MHz							
2439.500	87.77	PK	H	31.60	119.37	N/A	N/A
2439.500	82.07	AV	H	31.60	113.67	N/A	N/A
2439.500	94.45	PK	V	31.60	126.05	N/A	N/A
2439.500	88.01	AV	V	31.60	119.61	N/A	N/A
4879.000	34.56	PK	V	11.06	45.62	74.00	28.38
4879.000	21.58	AV	V	11.06	32.64	54.00	21.36
7318.500	35.28	PK	V	14.80	50.08	74.00	23.92
7318.500	22.57	AV	V	14.80	37.37	54.00	16.63
4884.000	34.76	PK	V	11.08	45.84	74.00	28.16
4884.000	21.58	AV	V	11.08	32.66	54.00	21.34
7199.000	41.35	PK	V	14.16	55.51	74.00	18.49
7199.000	28.64	AV	V	14.16	42.80	54.00	11.20
High Channel: 2475.5MHz							
2475.500	88.64	PK	H	31.64	120.28	N/A	N/A
2475.500	83.42	AV	H	31.64	115.06	N/A	N/A
2475.500	93.66	PK	V	31.64	125.30	N/A	N/A
2475.500	89.46	AV	V	31.64	121.10	N/A	N/A
2483.500	28.58	PK	V	31.64	60.22	74.00	13.78
2483.500	15.67	AV	V	31.64	47.31	54.00	6.69
4951.000	35.64	PK	V	11.24	46.88	74.00	27.12
4951.000	22.35	AV	V	11.24	33.59	54.00	20.41
7426.500	34.26	PK	V	15.15	49.41	74.00	24.59
7426.500	21.58	AV	V	15.15	36.73	54.00	17.27
4884.000	34.67	PK	V	11.08	45.75	74.00	28.25
4884.000	21.86	AV	V	11.08	32.94	54.00	21.06
7199.000	42.26	PK	V	14.16	56.42	74.00	17.58
7199.000	29.34	AV	V	14.16	43.50	54.00	10.50

**16QAM:**

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
	Reading (dB $\mu$ V)	Detector					
Low Channel: 2403.5 MHz							
2403.500	90.71	PK	H	31.51	122.22	N/A	N/A
2403.500	84.67	AV	H	31.51	116.18	N/A	N/A
2403.500	94.33	PK	V	31.51	125.84	N/A	N/A
2403.500	87.79	AV	V	31.51	119.30	N/A	N/A
2390.000	26.79	PK	V	31.46	58.25	74.00	15.75
2390.000	14.07	AV	V	31.46	45.53	54.00	8.47
4807.000	34.26	PK	V	10.92	45.18	74.00	28.82
4807.000	21.64	AV	V	10.92	32.56	54.00	21.44
7210.500	35.64	PK	V	14.25	49.89	74.00	24.11
7210.500	22.34	AV	V	14.25	36.59	54.00	17.41
4884.000	34.34	PK	V	11.08	45.42	74.00	28.58
4884.000	21.64	AV	V	11.08	32.72	54.00	21.28
7199.000	41.83	PK	V	14.16	55.99	74.00	18.01
7199.000	28.64	AV	V	14.16	42.80	54.00	11.20
Middle Channel: 2439.5 MHz							
2439.500	88.59	PK	H	31.60	120.19	N/A	N/A
2439.500	82.50	AV	H	31.60	114.10	N/A	N/A
2439.500	94.20	PK	V	31.60	125.80	N/A	N/A
2439.500	88.02	AV	V	31.60	119.62	N/A	N/A
4879.000	35.26	PK	V	11.06	46.32	74.00	27.68
4879.000	22.34	AV	V	11.06	33.40	54.00	20.60
7318.500	34.15	PK	V	14.80	48.95	74.00	25.05
7318.500	21.64	AV	V	14.80	36.44	54.00	17.56
4884.000	34.26	PK	V	11.08	45.34	74.00	28.66
4884.000	21.47	AV	V	11.08	32.55	54.00	21.45
7199.000	40.38	PK	V	14.16	54.54	74.00	19.46
7199.000	27.34	AV	V	14.16	41.50	54.00	12.50
High Channel: 2475.5MHz							
2475.500	87.82	PK	H	31.64	119.46	N/A	N/A
2475.500	80.33	AV	H	31.64	111.97	N/A	N/A
2475.500	93.13	PK	V	31.64	124.77	N/A	N/A
2475.500	87.13	AV	V	31.64	118.77	N/A	N/A
2483.500	28.17	PK	V	31.64	59.81	74.00	14.19
2483.500	15.61	AV	V	31.64	47.25	54.00	6.75
4951.000	34.58	PK	V	11.24	45.82	74.00	28.18
4951.000	21.46	AV	V	11.24	32.70	54.00	21.30
7426.500	35.64	PK	V	15.15	50.79	74.00	23.21
7426.500	22.17	AV	V	15.15	37.32	54.00	16.68
4884.000	34.62	PK	V	11.08	45.70	74.00	28.30
4884.000	21.64	AV	V	11.08	32.72	54.00	21.28
7199.000	43.26	PK	V	14.16	57.42	74.00	16.58
7199.000	30.14	AV	V	14.16	44.30	54.00	9.70

**10MHz QPSK:**

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
	Reading (dB $\mu$ V)	Detector					
Low Channel: 2407.5 MHz							
2407.500	83.47	PK	H	31.52	114.99	N/A	N/A
2407.500	73.49	AV	H	31.52	105.01	N/A	N/A
2407.500	89.71	PK	V	31.52	121.23	N/A	N/A
2407.500	79.20	AV	V	31.52	110.72	N/A	N/A
2390.000	35.61	PK	V	31.46	67.07	74.00	6.93
2390.000	18.75	AV	V	31.46	50.21	54.00	3.79
4815.000	35.32	PK	V	10.93	46.25	74.00	27.75
4815.000	23.16	AV	V	10.93	34.09	54.00	19.91
7222.500	34.35	PK	V	14.34	48.69	74.00	25.31
7222.500	22.18	AV	V	14.34	36.52	54.00	17.48
7199.000	42.51	PK	V	14.16	56.67	74.00	17.33
7199.000	34.12	AV	V	14.16	48.28	54.00	5.72
Middle Channel: 2439.5 MHz							
2439.500	84.38	PK	H	31.60	115.98	N/A	N/A
2439.500	73.84	AV	H	31.60	105.44	N/A	N/A
2439.500	89.32	PK	V	31.60	120.92	N/A	N/A
2439.500	79.62	AV	V	31.60	111.22	N/A	N/A
4879.000	36.19	PK	V	11.06	47.25	74.00	26.75
4879.000	24.10	AV	V	11.06	35.16	54.00	18.84
7318.500	34.42	PK	V	14.80	49.22	74.00	24.78
7318.500	22.21	AV	V	14.80	37.01	54.00	16.99
7199.000	41.43	PK	V	14.16	55.59	74.00	18.41
7199.000	33.22	AV	V	14.16	47.38	54.00	6.62
High Channel: 2471.5MHz							
2471.500	79.49	PK	H	31.64	111.13	N/A	N/A
2471.500	69.05	AV	H	31.64	100.69	N/A	N/A
2471.500	86.62	PK	V	31.64	118.26	N/A	N/A
2471.500	77.01	AV	V	31.64	108.65	N/A	N/A
2483.500	37.97	PK	V	31.64	69.61	74.00	4.39
2483.500	21.31	AV	V	31.64	52.95	54.00	1.05
4943.000	34.59	PK	V	11.22	45.81	74.00	28.19
4943.000	22.30	AV	V	11.22	33.52	54.00	20.48
7414.500	34.90	PK	V	15.05	49.95	74.00	24.05
7414.500	22.45	AV	V	15.05	37.50	54.00	16.50
7199.000	41.16	PK	V	14.16	55.32	74.00	18.68
7199.000	33.10	AV	V	14.16	47.26	54.00	6.74

**16QAM:**

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
	Reading (dB $\mu$ V)	Detector					
Low Channel: 2407.5 MHz							
2407.500	84.60	PK	H	31.52	116.12	N/A	N/A
2407.500	74.06	AV	H	31.52	105.58	N/A	N/A
2407.500	90.03	PK	V	31.52	121.55	N/A	N/A
2407.500	79.71	AV	V	31.52	111.23	N/A	N/A
2390.000	39.47	PK	V	31.46	70.93	74.00	3.07
2390.000	22.17	AV	V	31.46	53.63	54.00	0.37
4815.000	42.02	PK	V	10.93	52.95	74.00	21.05
4815.000	29.78	AV	V	10.93	40.71	54.00	13.29
7222.500	34.53	PK	V	14.34	48.87	74.00	25.13
7222.500	22.27	AV	V	14.34	36.61	54.00	17.39
4884.000	40.77	PK	V	11.08	51.85	74.00	22.15
4884.000	28.39	AV	V	11.08	39.47	54.00	14.53
7199.000	42.19	PK	V	14.16	56.35	74.00	17.65
7199.000	33.25	AV	V	14.16	47.41	54.00	6.59
Middle Channel: 2439.5 MHz							
2439.500	83.26	PK	H	31.60	114.86	N/A	N/A
2439.500	73.04	AV	H	31.60	104.64	N/A	N/A
2439.500	89.84	PK	V	31.60	121.44	N/A	N/A
2439.500	79.94	AV	V	31.60	111.54	N/A	N/A
4879.000	43.96	PK	V	11.06	55.02	74.00	18.98
4879.000	30.77	AV	V	11.06	41.83	54.00	12.17
7318.500	35.04	PK	V	14.80	49.84	74.00	24.16
7318.500	23.02	AV	V	14.80	37.82	54.00	16.18
4884.000	41.00	PK	V	11.08	52.08	74.00	21.92
4884.000	28.45	AV	V	11.08	39.53	54.00	14.47
7199.000	41.80	PK	V	14.16	55.96	74.00	18.04
7199.000	32.40	AV	V	14.16	46.56	54.00	7.44
High Channel: 2471.5MHz							
2471.500	78.68	PK	H	31.64	110.32	N/A	N/A
2471.500	68.18	AV	H	31.64	99.82	N/A	N/A
2471.500	86.08	PK	V	31.64	117.72	N/A	N/A
2471.500	75.57	AV	V	31.64	107.21	N/A	N/A
2483.500	37.44	PK	V	31.64	69.08	74.00	4.92
2483.500	21.76	AV	V	31.64	53.40	54.00	0.60
4943.000	42.14	PK	V	11.22	53.36	74.00	20.64
4943.000	29.07	AV	V	11.22	40.29	54.00	13.71
7414.500	33.04	PK	V	15.05	48.09	74.00	25.91
7414.500	21.02	AV	V	15.05	36.07	54.00	17.93
4884.000	37.55	PK	V	11.08	48.63	74.00	25.37
4884.000	25.28	AV	V	11.08	36.36	54.00	17.64
7199.000	42.37	PK	V	14.16	56.53	74.00	17.47
7199.000	33.56	AV	V	14.16	47.72	54.00	6.28


**20MHz QPSK:**

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
	Reading (dB $\mu$ V)	Detector					
Low Channel: 2412.5 MHz							
2412.500	78.86	PK	H	31.53	110.39	N/A	N/A
2412.500	65.75	AV	H	31.53	97.28	N/A	N/A
2412.500	84.21	PK	V	31.53	115.74	N/A	N/A
2412.500	73.00	AV	V	31.53	104.53	N/A	N/A
2390.000	34.65	PK	V	31.46	66.11	74.00	7.89
2390.000	20.56	AV	V	31.46	52.02	54.00	1.98
4825.000	35.26	PK	V	10.94	46.20	74.00	27.80
4825.000	22.64	AV	V	10.94	33.58	54.00	20.42
7237.500	34.26	PK	V	14.46	48.72	74.00	25.28
7237.500	21.58	AV	V	14.46	36.04	54.00	17.96
7199.000	41.60	PK	V	14.16	55.76	74.00	18.24
7199.000	28.64	AV	V	14.16	42.80	54.00	11.20
Middle Channel: 2437.5 MHz							
2437.500	81.16	PK	H	31.60	112.76	N/A	N/A
2437.500	69.61	AV	H	31.60	101.21	N/A	N/A
2437.500	82.10	PK	V	31.60	113.70	N/A	N/A
2437.500	71.09	AV	V	31.60	102.69	N/A	N/A
4875.000	35.64	PK	V	11.05	46.69	74.00	27.31
4875.000	22.64	AV	V	11.05	33.69	54.00	20.31
7312.500	34.57	PK	V	14.80	49.37	74.00	24.63
7312.500	21.34	AV	V	14.80	36.14	54.00	17.86
7199.000	42.03	PK	V	14.16	56.19	74.00	17.81
7199.000	29.64	AV	V	14.16	43.80	54.00	10.20
High Channel: 2462.5MHz							
2462.500	78.16	PK	H	31.64	109.80	N/A	N/A
2462.500	66.41	AV	H	31.64	98.05	N/A	N/A
2462.500	82.29	PK	V	31.64	113.93	N/A	N/A
2462.500	74.37	AV	V	31.64	106.01	N/A	N/A
2483.500	37.83	PK	V	31.64	69.47	74.00	4.53
2483.500	21.90	AV	V	31.64	53.54	54.00	0.46
4925.000	35.64	PK	V	11.19	46.83	74.00	27.17
4925.000	22.58	AV	V	11.19	33.77	54.00	20.23
7387.500	34.67	PK	V	14.89	49.56	74.00	24.44
7387.500	21.57	AV	V	14.89	36.46	54.00	17.54
7199.000	41.44	PK	V	14.16	55.60	74.00	18.40
7199.000	28.64	AV	V	14.16	42.80	54.00	11.20

**16QAM:**

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
	Reading (dB $\mu$ V)	Detector					
Low Channel: 2412.5 MHz							
2412.500	79.62	PK	H	31.53	111.15	N/A	N/A
2412.500	68.64	AV	H	31.53	100.17	N/A	N/A
2412.500	83.69	PK	V	31.53	115.22	N/A	N/A
2412.500	72.38	AV	V	31.53	103.91	N/A	N/A
2390.000	34.51	PK	V	31.46	65.97	74.00	8.03
2390.000	20.20	AV	V	31.46	51.66	54.00	2.34
4825.000	34.26	PK	V	10.94	45.20	74.00	28.80
4825.000	21.58	AV	V	10.94	32.52	54.00	21.48
7237.500	35.46	PK	V	14.46	49.92	74.00	24.08
7237.500	22.15	AV	V	14.46	36.61	54.00	17.39
7199.290	41.28	PK	V	14.17	55.45	74.00	18.55
7199.290	28.04	AV	V	14.17	42.21	54.00	11.79
Middle Channel: 2437.5 MHz							
2437.500	84.44	PK	H	31.60	116.04	N/A	N/A
2437.500	72.36	AV	H	31.60	103.96	N/A	N/A
2437.500	88.66	PK	V	31.60	120.26	N/A	N/A
2437.500	77.40	AV	V	31.60	109.00	N/A	N/A
4875.000	34.58	PK	V	11.05	45.63	74.00	28.37
4875.000	21.75	AV	V	11.05	32.80	54.00	21.20
7312.500	34.52	PK	V	14.80	49.32	74.00	24.68
7312.500	21.67	AV	V	14.80	36.47	54.00	17.53
4884.000	34.26	PK	V	11.08	45.34	74.00	28.66
4884.000	21.77	AV	V	11.08	32.85	54.00	21.15
7199.290	41.36	PK	V	14.17	55.53	74.00	18.47
7199.290	28.36	AV	V	14.17	42.53	54.00	11.47
High Channel: 2462.5MHz							
2462.500	81.25	PK	H	31.64	112.89	N/A	N/A
2462.500	69.14	AV	H	31.64	100.78	N/A	N/A
2462.500	86.51	PK	V	31.64	118.15	N/A	N/A
2462.500	74.57	AV	V	31.64	106.21	N/A	N/A
2483.500	35.55	PK	V	31.64	67.19	74.00	6.81
2483.500	19.52	AV	V	31.64	51.16	54.00	2.84
4925.000	34.63	PK	V	11.19	45.82	74.00	28.18
4925.000	21.58	AV	V	11.19	32.77	54.00	21.23
7387.500	34.25	PK	V	14.89	49.14	74.00	24.86
7387.500	21.45	AV	V	14.89	36.34	54.00	17.66
4884.000	35.46	PK	V	11.08	46.54	74.00	27.46
4884.000	22.00	AV	V	11.08	33.08	54.00	20.92
7199.290	41.89	PK	V	14.17	56.06	74.00	17.94
7199.290	28.64	AV	V	14.17	42.81	54.00	11.19

**Worst Test plots(10MHz Mode QPSK Low channel was the worst)**

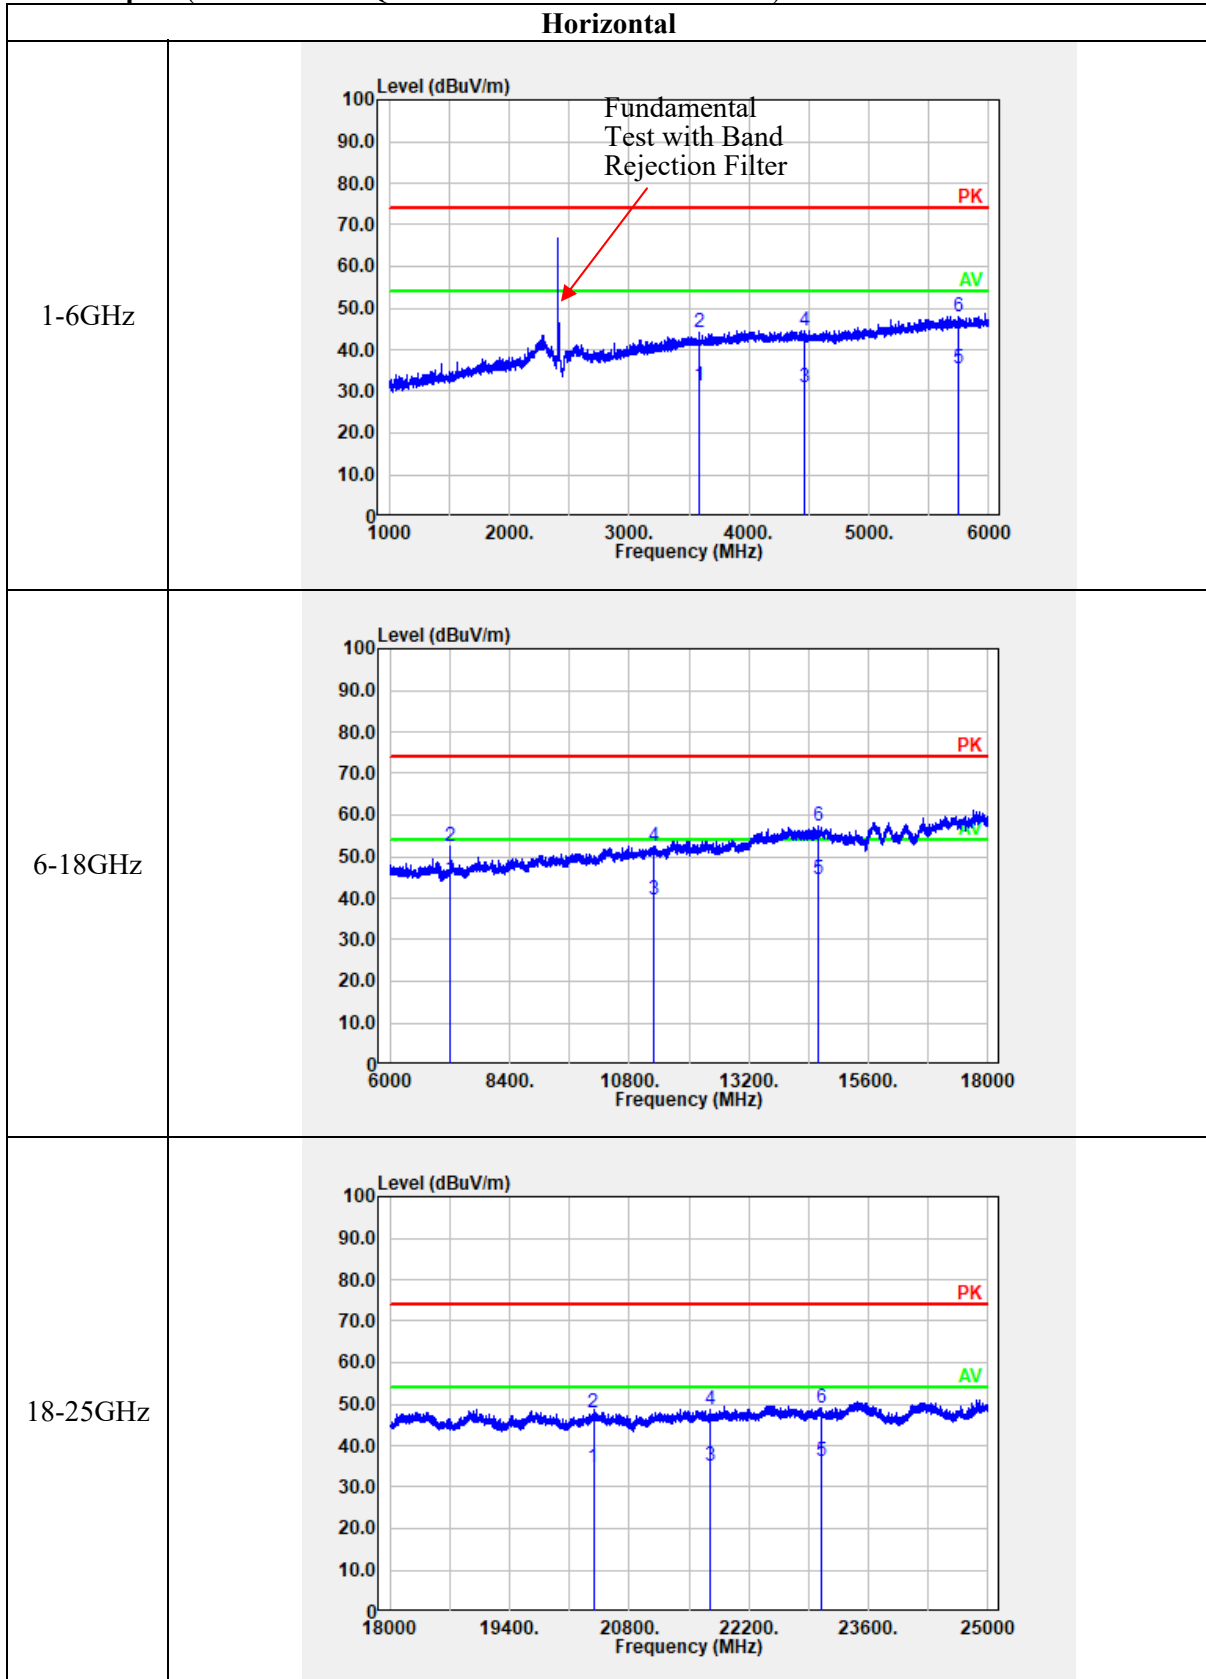



**Vertical**

<p>1-6GHz</p>	
<p>6-18GHz</p>	
<p>18-25GHz</p>	

**4.3 6 dB Emission Bandwidth:**

Serial Number:	EVO Max	Test Date:	2023/2/7~2023/2/8
Test Site:	RF	Test Mode:	Transmitting
Tester:	Julie Tan	Test Result:	Pass

**Environmental Conditions:**

Temperature: (°C)	21.3~22.2	Relative Humidity: (%)	53~65	ATM Pressure: (kPa)	100.2~101.5
----------------------	-----------	------------------------------	-------	------------------------	-------------

**Test Equipment List and Details:**

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSV40	101943	2022/07/25	2023/07/24
zhuoxiang	Coaxial Cable	SMA-178	211003	Each time	N/A
Mini-Circuits	DC Block	BLK-18-S+	1554404	Each time	N/A
eastsheep	Coaxial Attenuator	2W-SMA-JK-18G	21060302	Each time	N/A


*\* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).*

**Test Data:**

Test only was performed at chain 0, please refer to the following table and plots:


Operation Bands	Test Modes	Test Frequency (MHz)	6 dB Bandwidth (MHz)	Limit (MHz)
900MHz	1.4M QPSK	904	1.129	$\geq 0.5$
		916	1.129	$\geq 0.5$
		926	1.129	$\geq 0.5$
	1.4M 16QAM	904	1.129	$\geq 0.5$
		916	1.129	$\geq 0.5$
		926	1.129	$\geq 0.5$
	10M QPSK	909	9.001	$\geq 0.5$
		915	9.001	$\geq 0.5$
		921	9.001	$\geq 0.5$
	10M 16QAM	909	9.001	$\geq 0.5$
		915	9.001	$\geq 0.5$
		921	9.001	$\geq 0.5$
	20M QPSK	914	18.119	$\geq 0.5$
		916	18.119	$\geq 0.5$
20M 16QAM	914	18.119	$\geq 0.5$	
	916	18.119	$\geq 0.5$	
2.4GHz	1.4M QPSK	2403.5	1.133	$\geq 0.5$
		2439.5	1.133	$\geq 0.5$
		2475.5	1.125	$\geq 0.5$
	1.4M 16QAM	2403.5	1.125	$\geq 0.5$
		2439.5	1.125	$\geq 0.5$
		2475.5	1.125	$\geq 0.5$
	10M QPSK	2407.5	9.001	$\geq 0.5$
		2439.5	9.001	$\geq 0.5$
		2471.5	9.001	$\geq 0.5$
	10M 16QAM	2407.5	9.001	$\geq 0.5$
		2439.5	9.001	$\geq 0.5$
		2471.5	9.001	$\geq 0.5$
	20M QPSK	2412.5	18.061	$\geq 0.5$
		2437.5	18.177	$\geq 0.5$
		2462.5	18.003	$\geq 0.5$
	20M 16QAM	2412.5	18.061	$\geq 0.5$
		2437.5	18.061	$\geq 0.5$
		2462.5	18.119	$\geq 0.5$

**900MHz Band:**

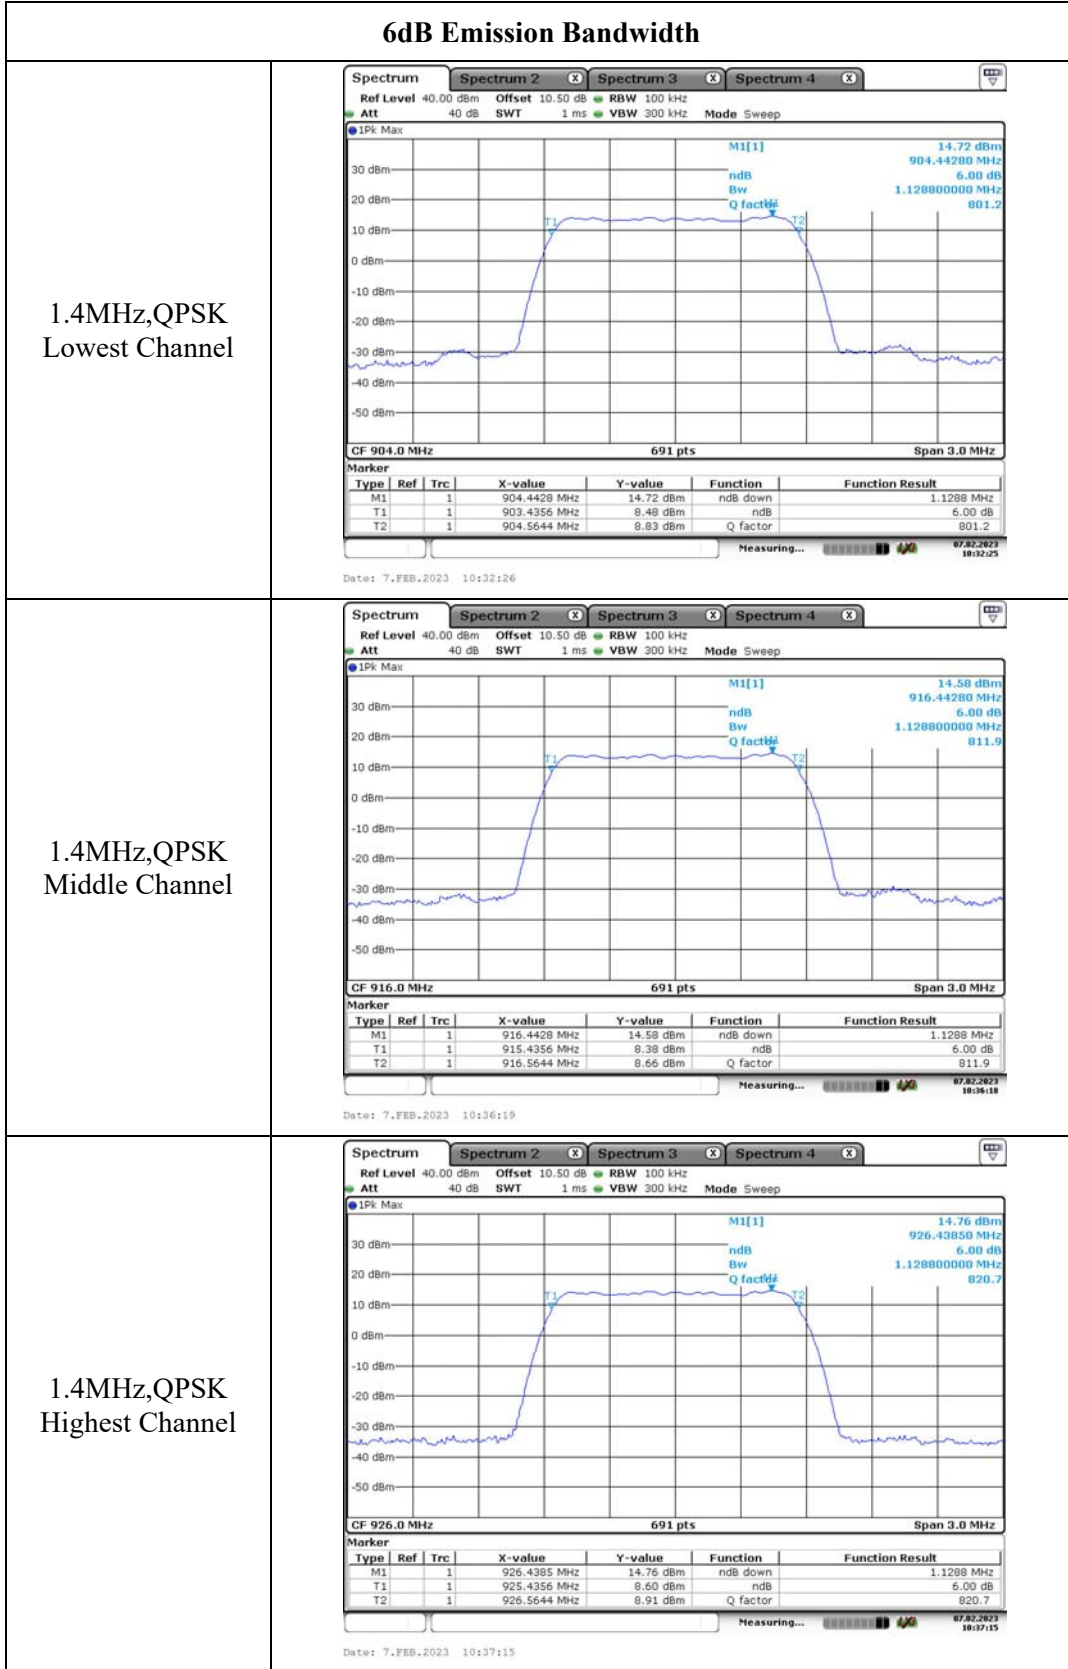


### 6dB Emission Bandwidth

1.4MHz, 16QAM  
Lowest Channel

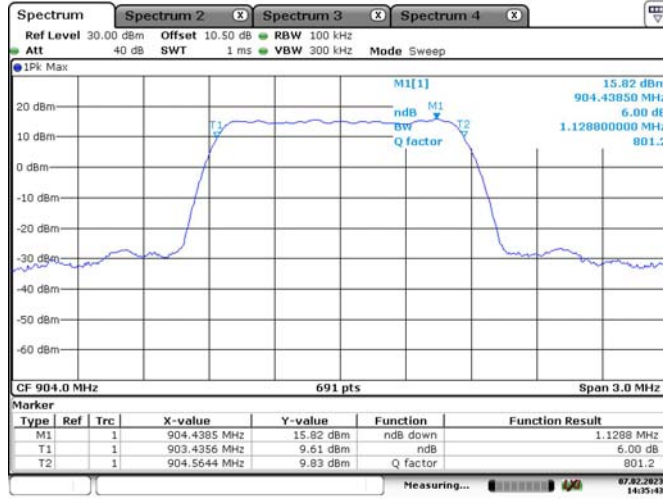


Date: 7.FEB.2023 14:35:43

1.4MHz, 16QAM  
Middle Channel

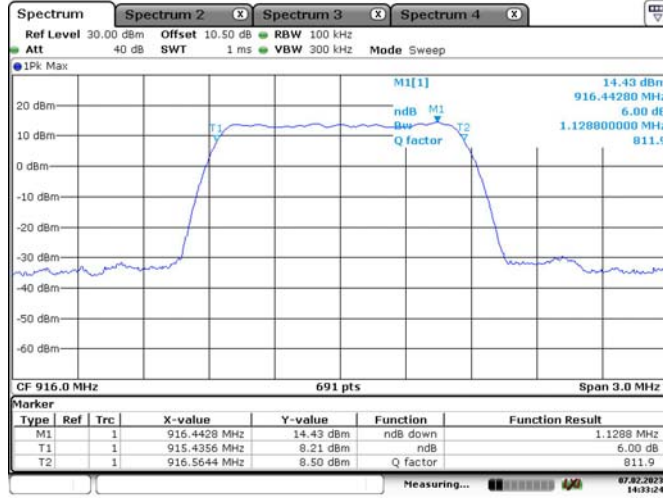

Date: 7.FEB.2023 14:33:24


1.4MHz, 16QAM  
Highest Channel

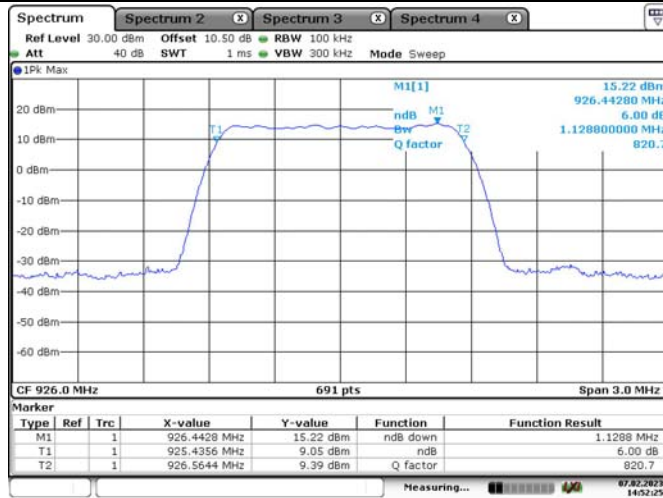


Date: 7.FEB.2023 14:52:25

### 6dB Emission Bandwidth


10MHz,QPSK  
Lowest Channel

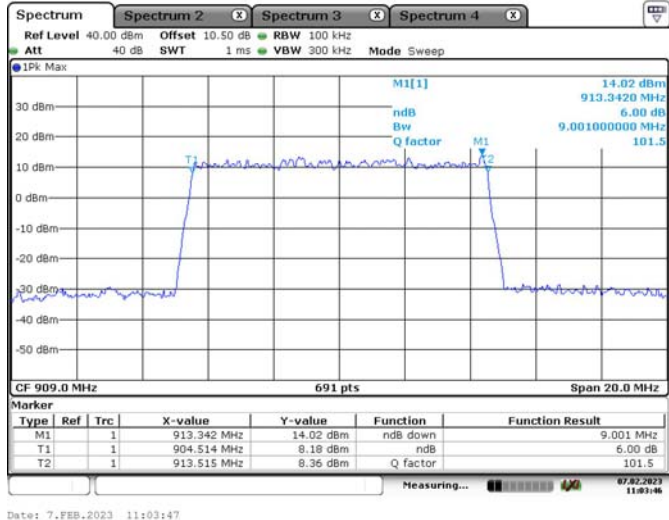

10MHz,QPSK  
Middle Channel

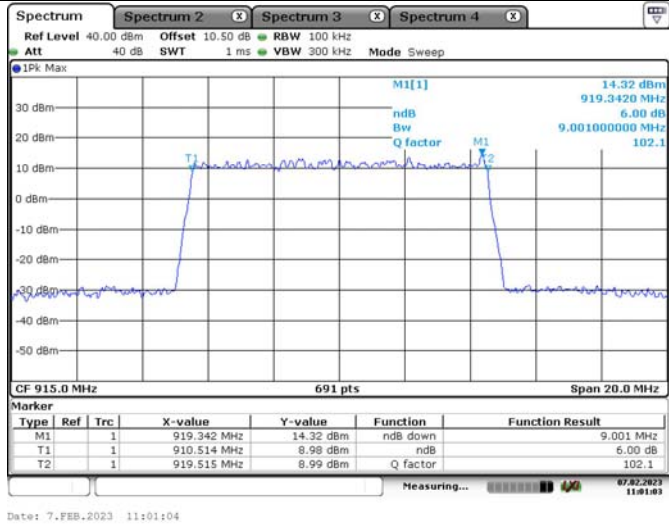


10MHz,QPSK  
Highest Channel

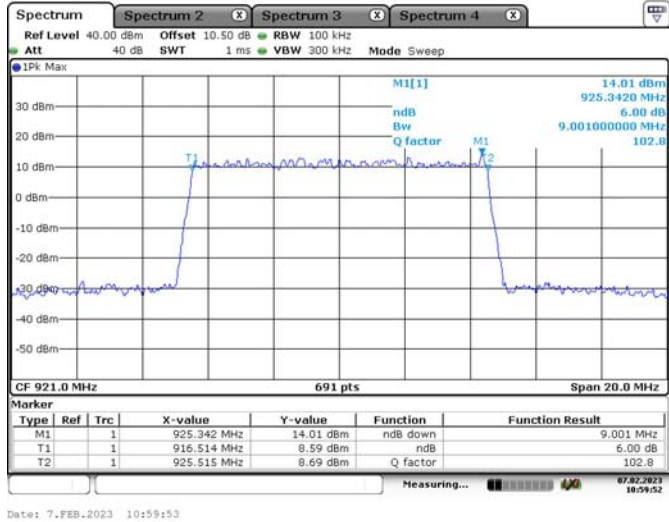


### 6dB Emission Bandwidth

10MHz, 16QAM  
Lowest Channel

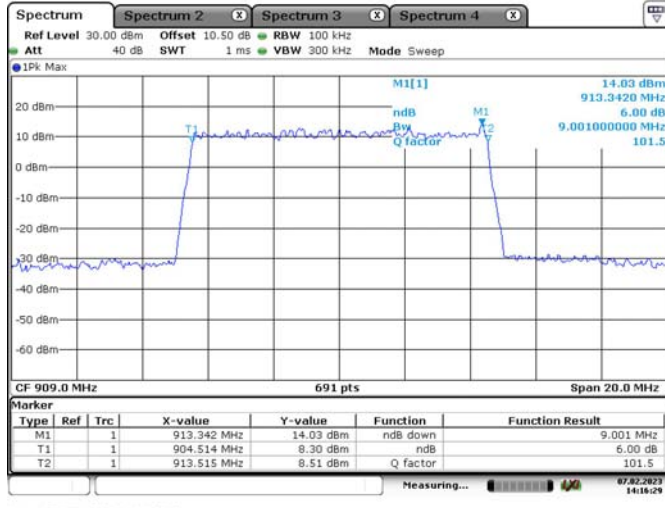


Date: 7.FEB.2023 14:16:29

10MHz, 16QAM  
Middle Channel

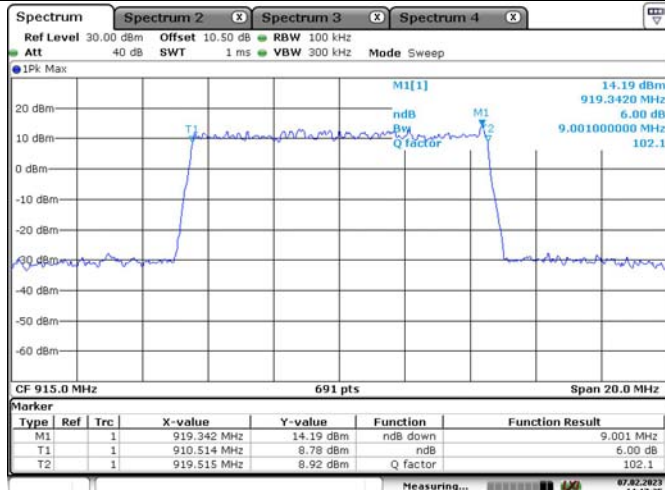

Date: 7.FEB.2023 14:17:35


10MHz, 16QAM  
Highest Channel

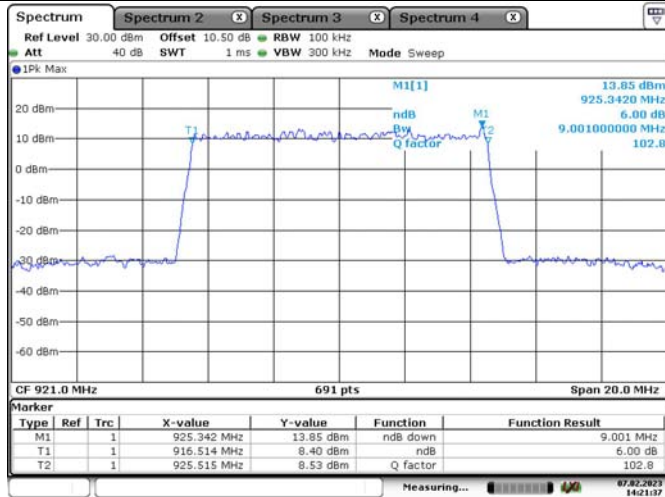

Date: 7.FEB.2023 14:21:37


### 6dB Emission Bandwidth

20MHz,QPSK  
Lowest Channel

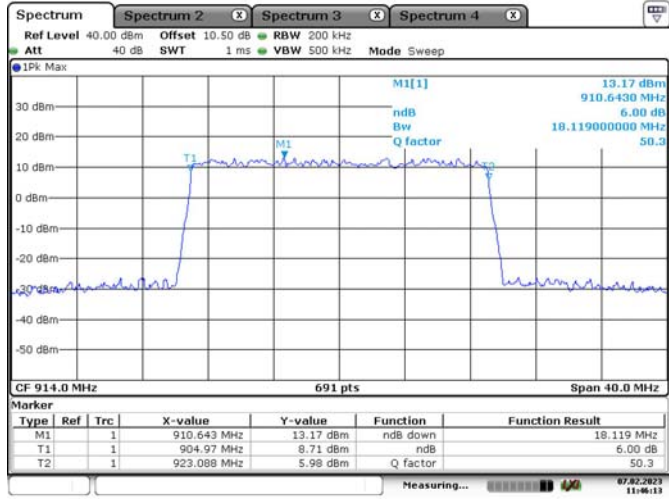

Date: 7.FEB.2023 11:46:14

20MHz,QPSK  
Highest Channel

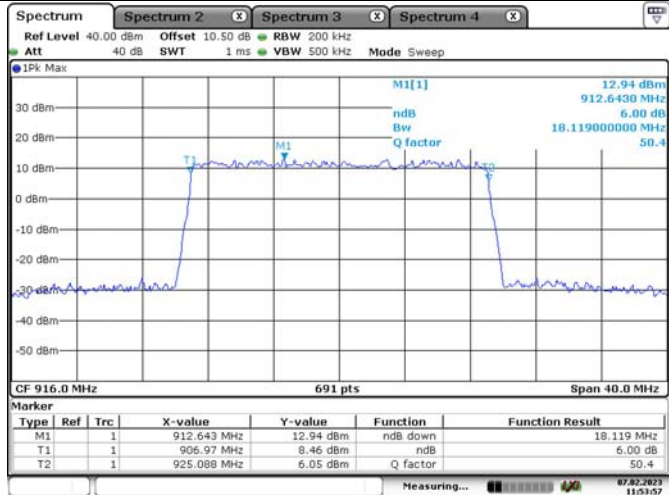


Date: 7.FEB.2023 11:53:57




### 6dB Emission Bandwidth

20MHz, 16QAM  
Lowest Channel

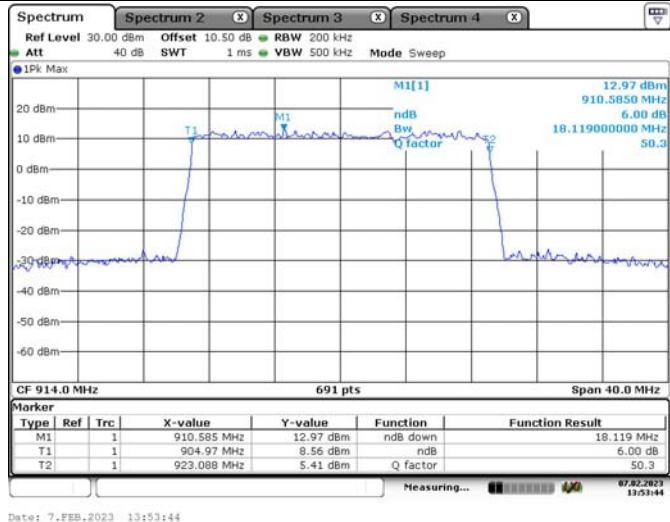

Date: 7.FEB.2023 13:53:44

20MHz, 16QAM  
Highest Channel

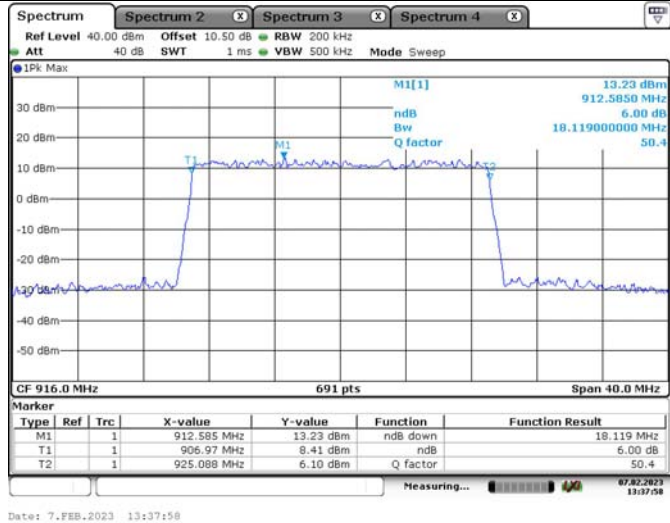


Date: 7.FEB.2023 13:37:58


2.4GHz Band:

6dB Emission Bandwidth


1.4MHz,QPSK  
Lowest Channel

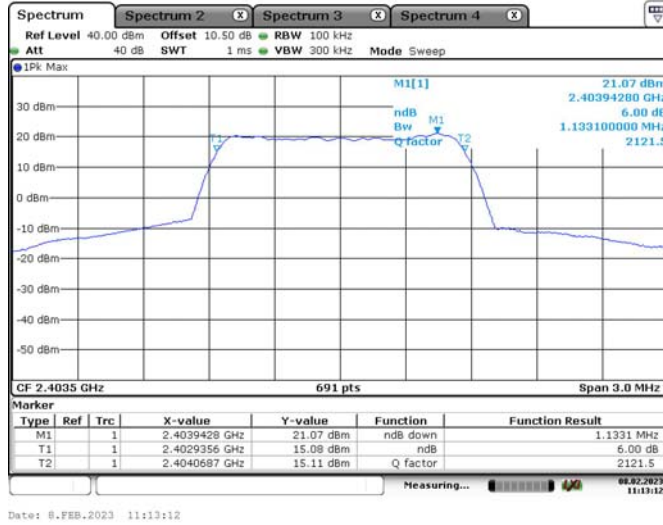

1.4MHz,QPSK  
Middle Channel

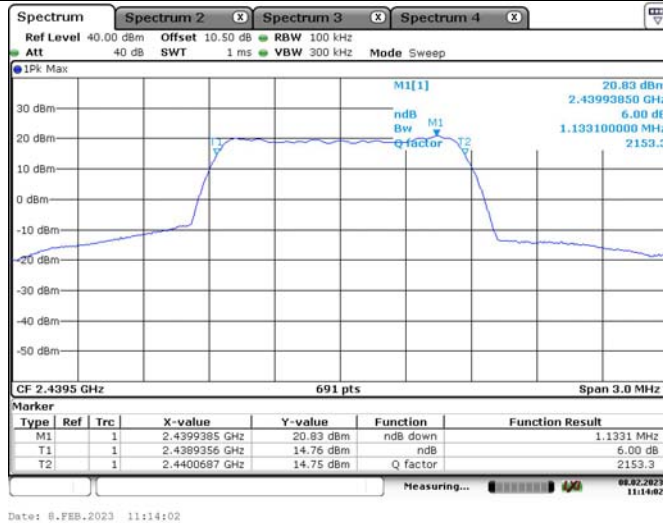

1.4MHz,QPSK  
Highest Channel

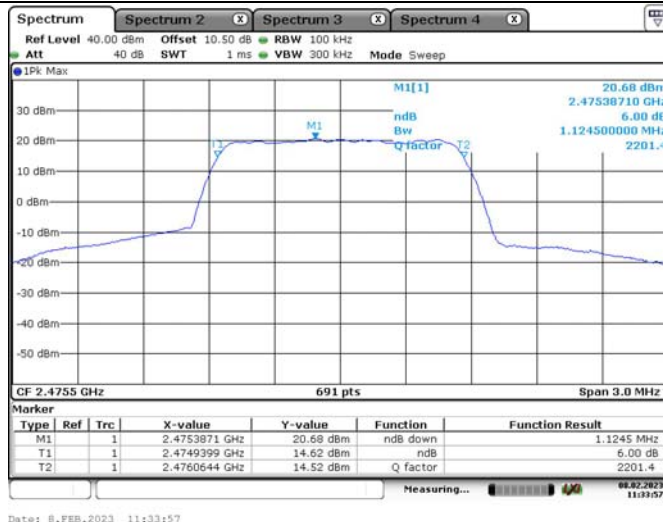


### 6dB Emission Bandwidth

<p>1.4MHz, 16QAM Lowest Channel</p>	<p>CF 2.4035 GHz 691 pts Span 3.0 MHz</p> <table border="1"> <thead> <tr> <th>Marker</th> <th>Type</th> <th>Ref</th> <th>Trc</th> <th>X-value</th> <th>Y-value</th> <th>Function</th> <th>Function Result</th> </tr> </thead> <tbody> <tr> <td>M1</td> <td>1</td> <td></td> <td></td> <td>2.4033871 GHz</td> <td>21.16 dBm</td> <td>ndB down</td> <td>1.1245 MHz</td> </tr> <tr> <td>T1</td> <td>1</td> <td></td> <td></td> <td>2.4029399 GHz</td> <td>15.15 dBm</td> <td>ndB</td> <td>6.00 dB</td> </tr> <tr> <td>T2</td> <td>1</td> <td></td> <td></td> <td>2.4040644 GHz</td> <td>15.19 dBm</td> <td>Q factor</td> <td>2137.4</td> </tr> </tbody> </table> <p>Date: 7.FEB.2023 15:42:59</p>	Marker	Type	Ref	Trc	X-value	Y-value	Function	Function Result	M1	1			2.4033871 GHz	21.16 dBm	ndB down	1.1245 MHz	T1	1			2.4029399 GHz	15.15 dBm	ndB	6.00 dB	T2	1			2.4040644 GHz	15.19 dBm	Q factor	2137.4
Marker	Type	Ref	Trc	X-value	Y-value	Function	Function Result																										
M1	1			2.4033871 GHz	21.16 dBm	ndB down	1.1245 MHz																										
T1	1			2.4029399 GHz	15.15 dBm	ndB	6.00 dB																										
T2	1			2.4040644 GHz	15.19 dBm	Q factor	2137.4																										
<p>1.4MHz, 16QAM Middle Channel</p>	<p>CF 2.4395 GHz 691 pts Span 3.0 MHz</p> <table border="1"> <thead> <tr> <th>Marker</th> <th>Type</th> <th>Ref</th> <th>Trc</th> <th>X-value</th> <th>Y-value</th> <th>Function</th> <th>Function Result</th> </tr> </thead> <tbody> <tr> <td>M1</td> <td>1</td> <td></td> <td></td> <td>2.4393871 GHz</td> <td>21.86 dBm</td> <td>ndB down</td> <td>1.1245 MHz</td> </tr> <tr> <td>T1</td> <td>1</td> <td></td> <td></td> <td>2.4389399 GHz</td> <td>15.63 dBm</td> <td>ndB</td> <td>6.00 dB</td> </tr> <tr> <td>T2</td> <td>1</td> <td></td> <td></td> <td>2.4400644 GHz</td> <td>15.70 dBm</td> <td>Q factor</td> <td>2169.4</td> </tr> </tbody> </table> <p>Date: 7.FEB.2023 17:14:17</p>	Marker	Type	Ref	Trc	X-value	Y-value	Function	Function Result	M1	1			2.4393871 GHz	21.86 dBm	ndB down	1.1245 MHz	T1	1			2.4389399 GHz	15.63 dBm	ndB	6.00 dB	T2	1			2.4400644 GHz	15.70 dBm	Q factor	2169.4
Marker	Type	Ref	Trc	X-value	Y-value	Function	Function Result																										
M1	1			2.4393871 GHz	21.86 dBm	ndB down	1.1245 MHz																										
T1	1			2.4389399 GHz	15.63 dBm	ndB	6.00 dB																										
T2	1			2.4400644 GHz	15.70 dBm	Q factor	2169.4																										
<p>1.4MHz, 16QAM Highest Channel</p>	<p>CF 2.4755 GHz 691 pts Span 3.0 MHz</p> <table border="1"> <thead> <tr> <th>Marker</th> <th>Type</th> <th>Ref</th> <th>Trc</th> <th>X-value</th> <th>Y-value</th> <th>Function</th> <th>Function Result</th> </tr> </thead> <tbody> <tr> <td>M1</td> <td>1</td> <td></td> <td></td> <td>2.4753915 GHz</td> <td>20.53 dBm</td> <td>ndB down</td> <td>1.1245 MHz</td> </tr> <tr> <td>T1</td> <td>1</td> <td></td> <td></td> <td>2.4749399 GHz</td> <td>14.36 dBm</td> <td>ndB</td> <td>6.00 dB</td> </tr> <tr> <td>T2</td> <td>1</td> <td></td> <td></td> <td>2.4760644 GHz</td> <td>14.51 dBm</td> <td>Q factor</td> <td>2201.4</td> </tr> </tbody> </table> <p>Date: 7.FEB.2023 17:17:30</p>	Marker	Type	Ref	Trc	X-value	Y-value	Function	Function Result	M1	1			2.4753915 GHz	20.53 dBm	ndB down	1.1245 MHz	T1	1			2.4749399 GHz	14.36 dBm	ndB	6.00 dB	T2	1			2.4760644 GHz	14.51 dBm	Q factor	2201.4
Marker	Type	Ref	Trc	X-value	Y-value	Function	Function Result																										
M1	1			2.4753915 GHz	20.53 dBm	ndB down	1.1245 MHz																										
T1	1			2.4749399 GHz	14.36 dBm	ndB	6.00 dB																										
T2	1			2.4760644 GHz	14.51 dBm	Q factor	2201.4																										


### 6dB Emission Bandwidth

10MHz,QPSK  
Lowest Channel

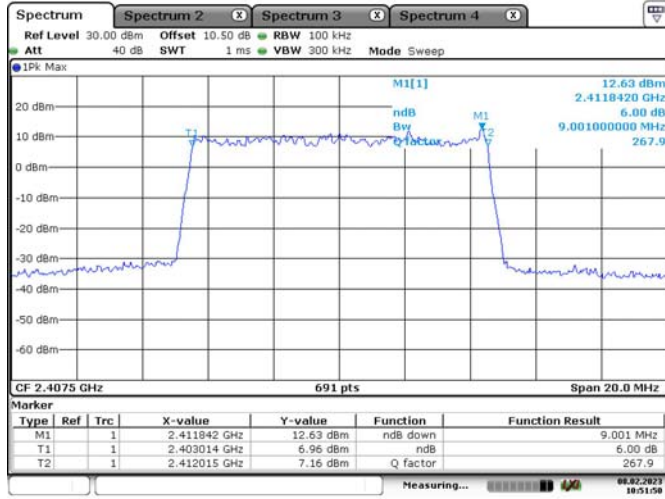


Date: 8.FEB.2023 10:51:50

10MHz,QPSK  
Middle Channel

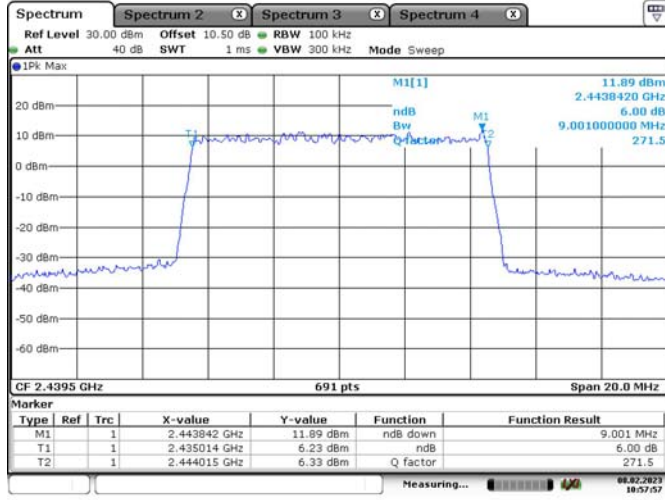

Date: 8.FEB.2023 10:57:57


10MHz,QPSK  
Highest Channel

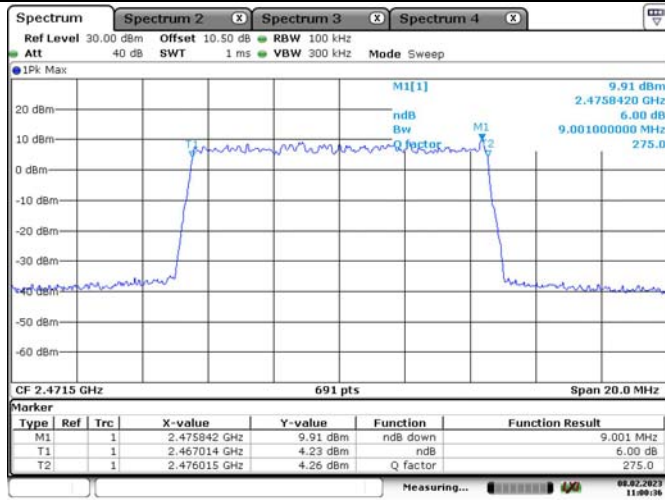

Date: 8.FEB.2023 11:00:36


### 6dB Emission Bandwidth

10MHz, 16QAM  
Lowest Channel

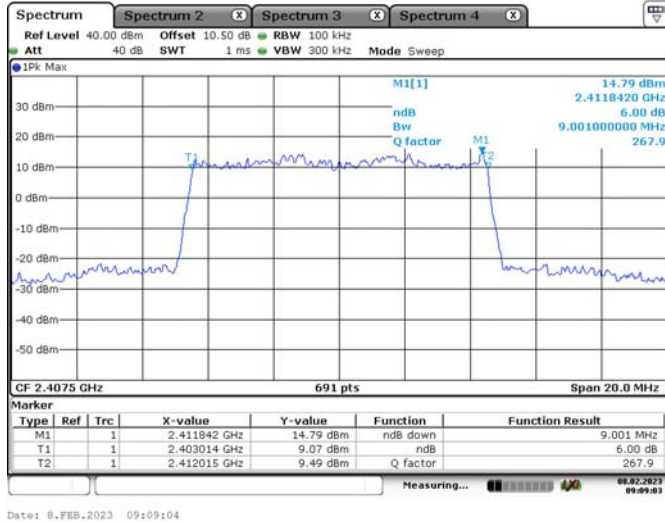


Date: 8.FEB.2023 09:09:04

10MHz, 16QAM  
Middle Channel

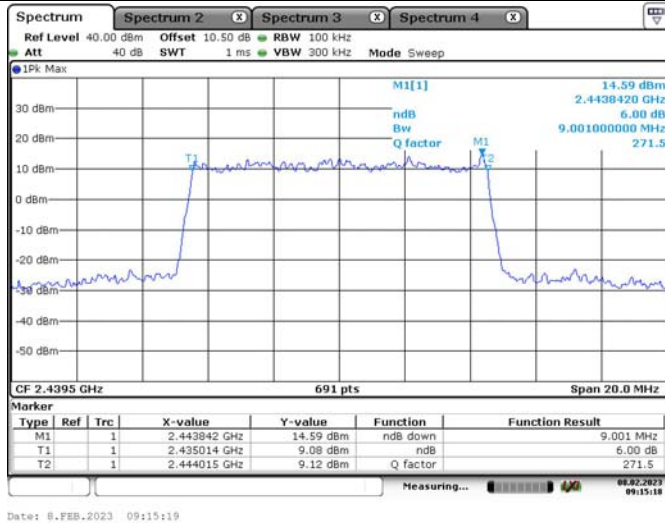

Date: 8.FEB.2023 09:15:19


10MHz, 16QAM  
Highest Channel

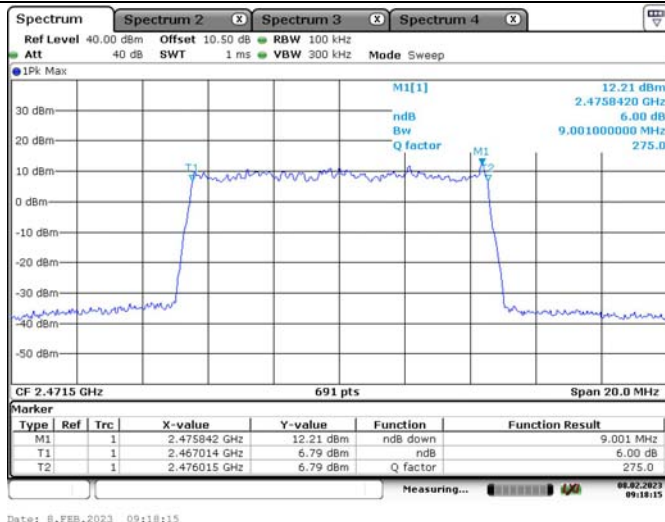

Date: 8.FEB.2023 09:18:15


### 6dB Emission Bandwidth

20MHz, QPSK  
Lowest Channel

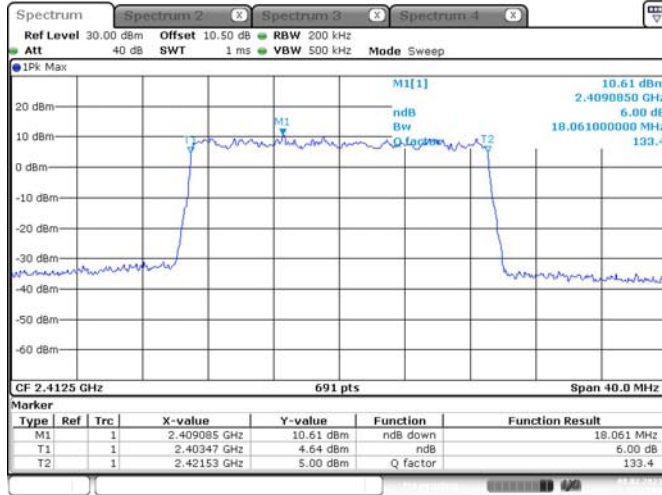


Date: 8.FEB.2023 10:22:14

20MHz, QPSK  
Middle Channel

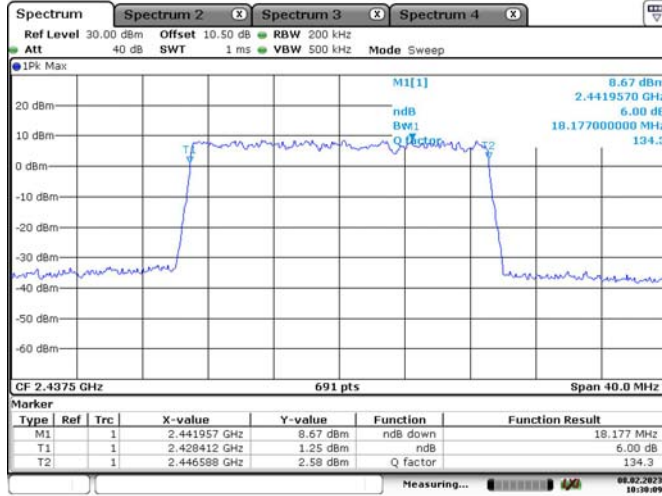

Date: 8.FEB.2023 10:30:09

20MHz, QPSK  
Highest Channel

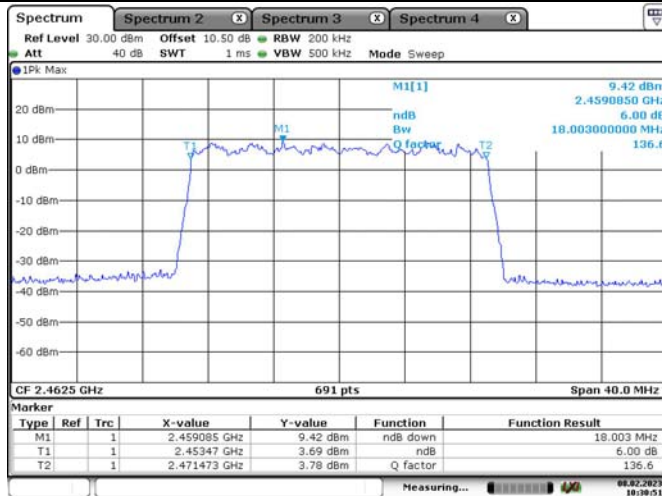


Date: 8.FEB.2023 10:30:51




### 6dB Emission Bandwidth

20MHz, 16QAM  
Lowest Channel

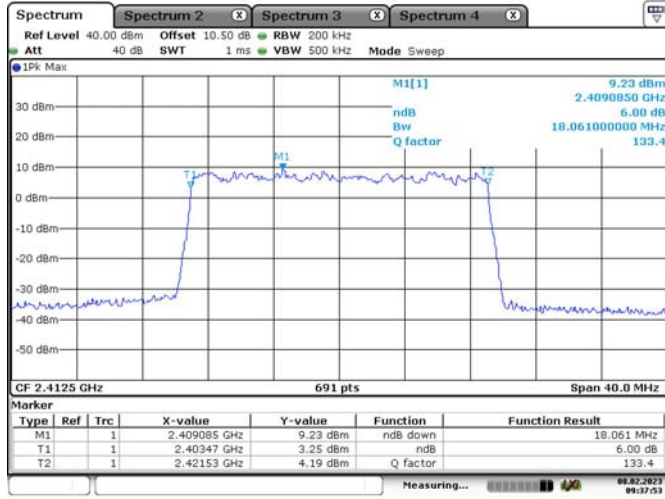


Date: 8.FEB.2023 09:37:54

20MHz, 16QAM  
Middle Channel

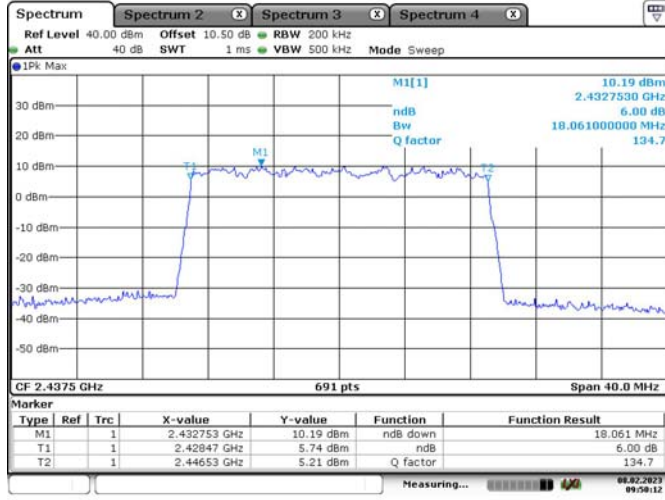

Date: 8.FEB.2023 09:50:12

20MHz, 16QAM  
Highest Channel

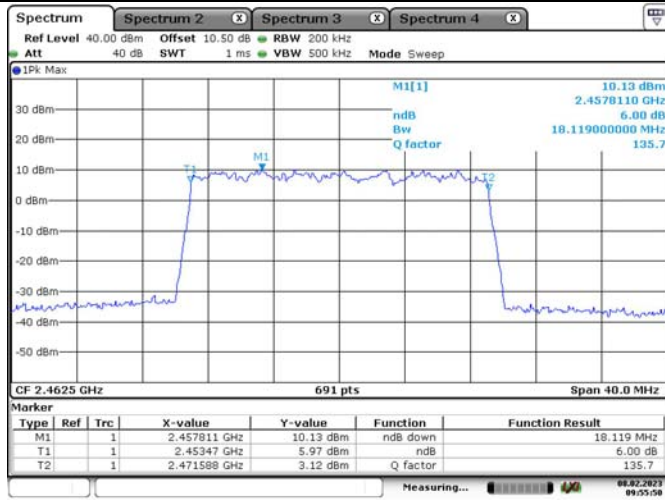

Date: 8.FEB.2023 09:55:51

**4.4 99% Occupied Bandwidth:**

Serial Number:	1QAT-13	Test Date:	2023/2/7~2023/2/8
Test Site:	RF	Test Mode:	Transmitting
Tester:	Julie Tan	Test Result:	Pass

**Environmental Conditions:**

Temperature: (°C)	21.3	Relative Humidity: (%)	65	ATM Pressure: (kPa)	101.5
----------------------	------	------------------------------	----	------------------------	-------

**Test Equipment List and Details:**

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSV40	101943	2022/07/25	2023/07/24
zhuoxiang	Coaxial Cable	SMA-178	211003	Each time	N/A
Mini-Circuits	DC Block	BLK-18-S+	1554404	Each time	N/A
eastsheep	Coaxial Attenuator	2W-SMA-JK-18G	21060302	Each time	N/A

*\* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).*


**Test Data:**

Test only was performed at chain 0, please refer to the following table and plots:




Operation Bands	Test Modes	Test Frequency (MHz)	99% Occupied Bandwidth (MHz)
900MHz	1.4M QPSK	904	1.085
		916	1.085
		926	1.085
	1.4M 16QAM	904	1.085
		916	1.085
		926	1.085
	10M QPSK	909	8.944
		915	8.944
		921	8.944
	10M 16QAM	909	8.944
		915	8.944
		921	8.944
	20M QPSK	914	17.945
		916	17.945
		914	17.945
20M 16QAM	914	17.945	
	916	17.945	
	916	17.945	
2.4GHz	1.4M QPSK	2403.5	1.085
		2439.5	1.09
		2475.5	1.077
	1.4M 16QAM	2403.5	1.085
		2439.5	1.081
		2475.5	1.077
	10M QPSK	2407.5	8.944
		2439.5	8.944
		2471.5	8.944
	10M 16QAM	2407.5	8.944
		2439.5	8.944
		2471.5	8.944
	20M QPSK	2412.5	17.945
		2437.5	17.945
		2462.5	17.945
	20M 16QAM	2412.5	17.945
		2437.5	17.945
		2462.5	17.945

**900MHz Band:**

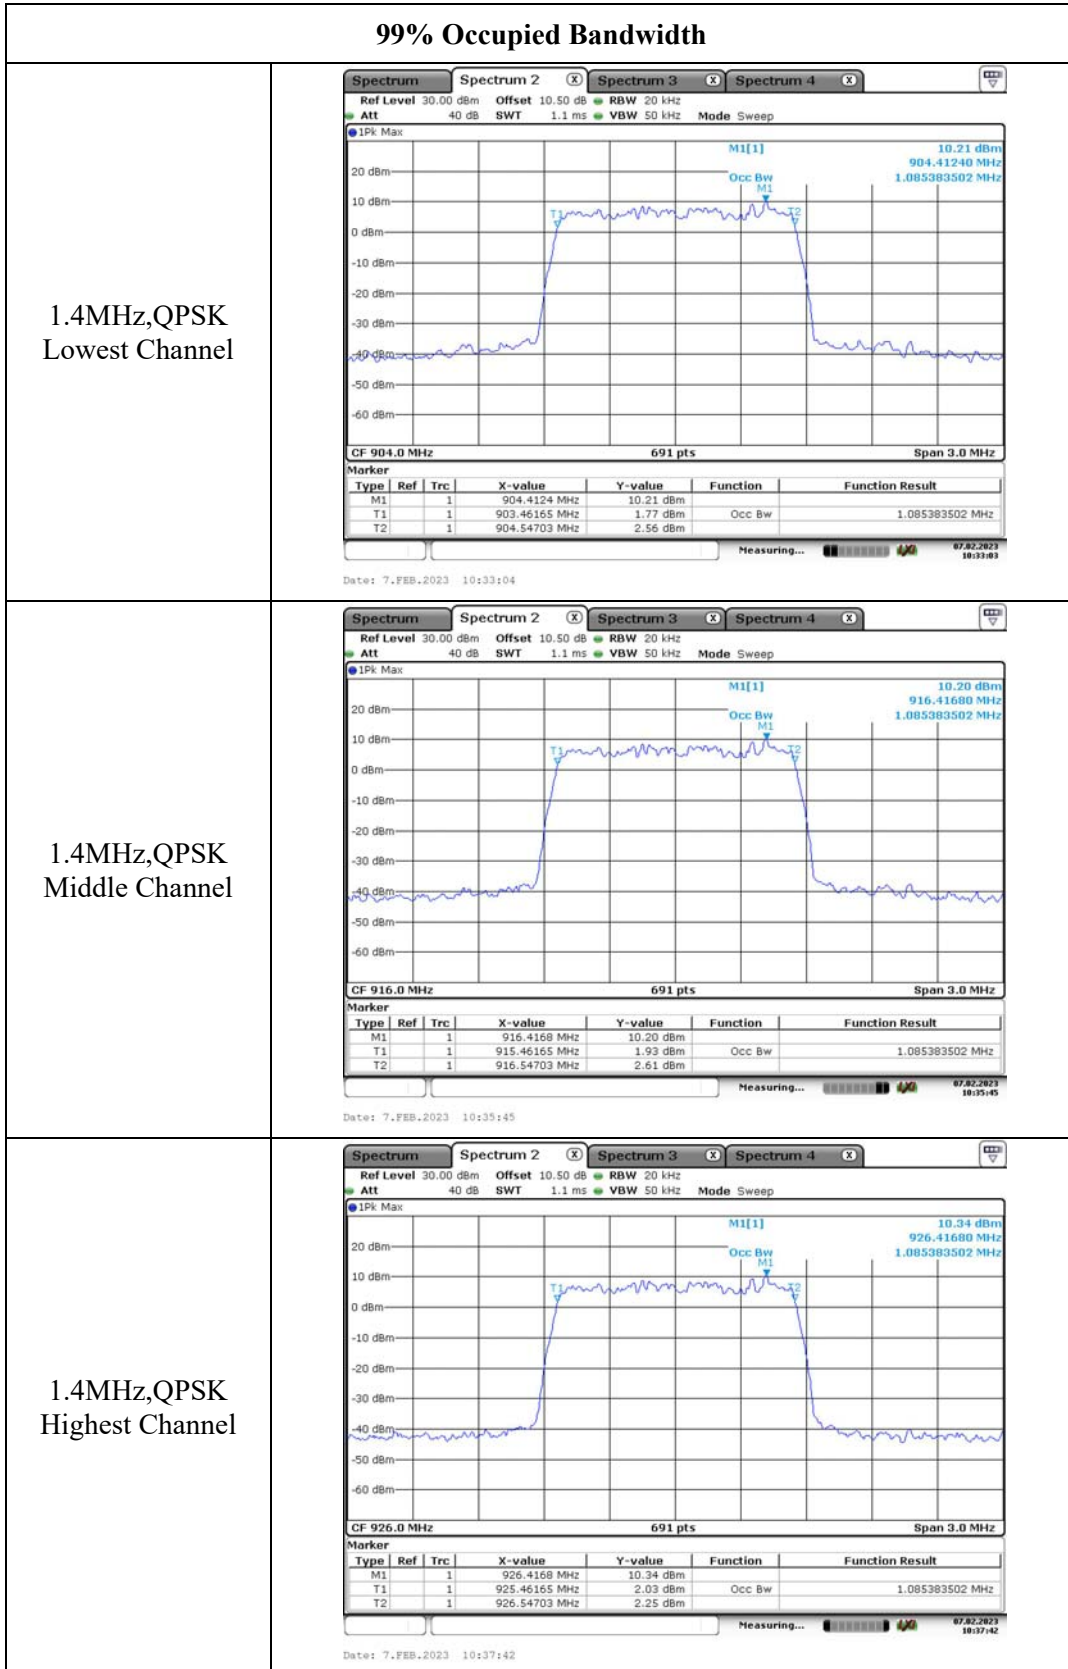


99% Occupied Bandwidth

1.4MHz, 16QAM  
Lowest Channel

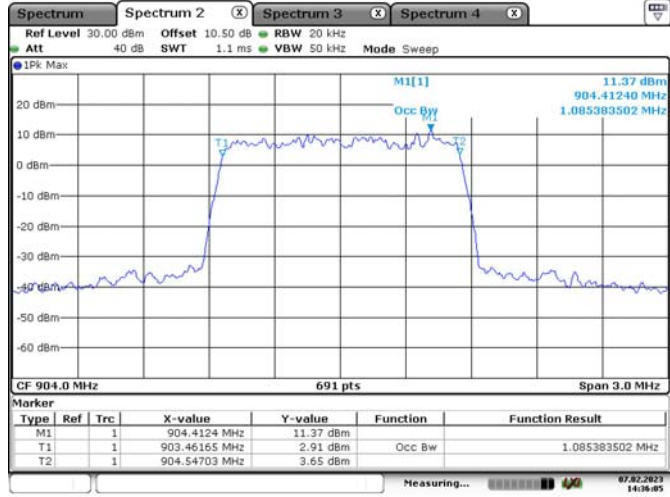


Date: 7.FEB.2023 14:36:05

1.4MHz, 16QAM  
Middle Channel

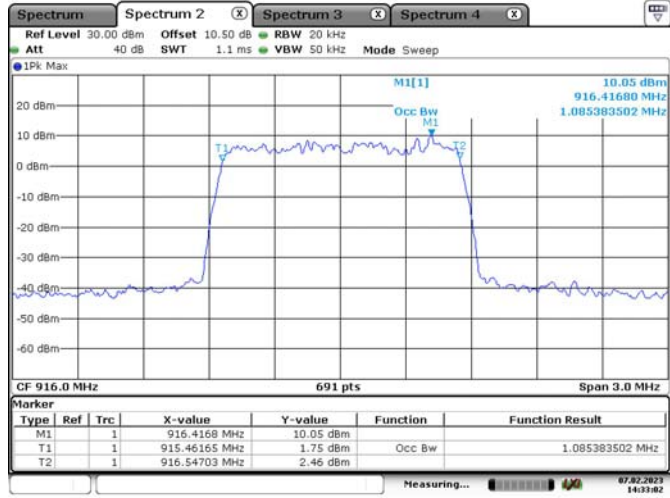

Date: 7.FEB.2023 14:33:02


1.4MHz, 16QAM  
Highest Channel

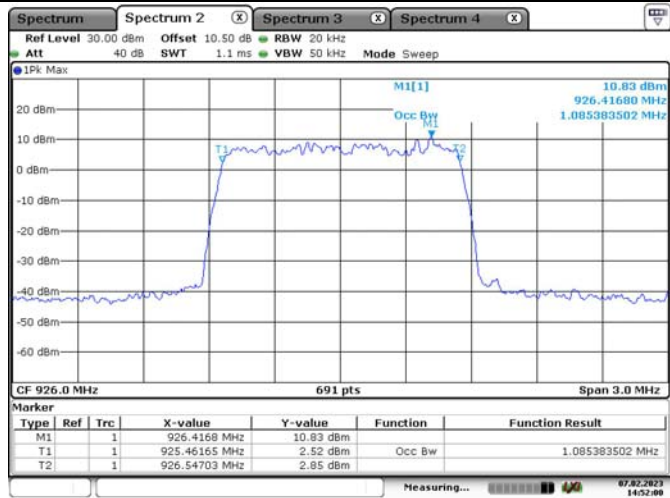

Date: 7.FEB.2023 14:52:00


### 99% Occupied Bandwidth

10MHz,QPSK  
Lowest Channel

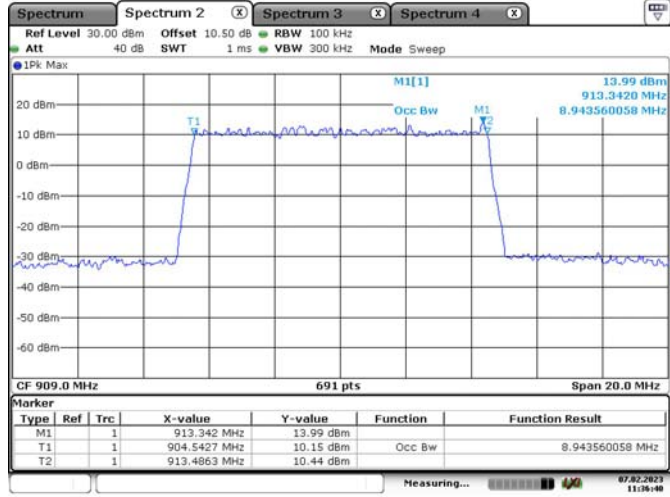


Date: 7.FEB.2023 11:36:41

10MHz,QPSK  
Middle Channel

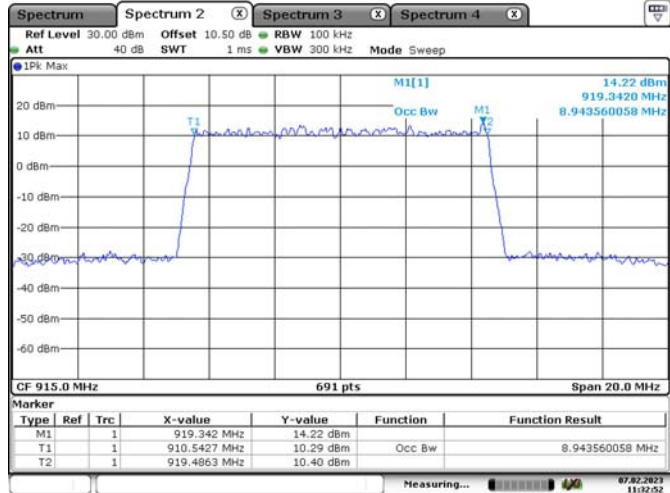

Date: 7.FEB.2023 11:32:52


10MHz,QPSK  
Highest Channel

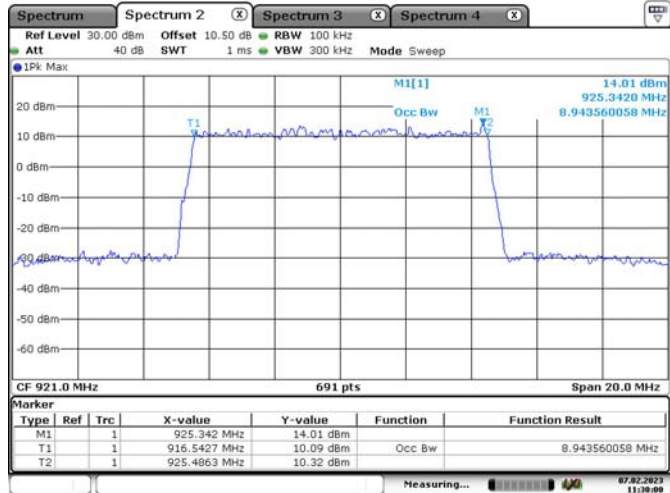

Date: 7.FEB.2023 11:30:01


### 99% Occupied Bandwidth

10MHz, 16QAM  
Lowest Channel

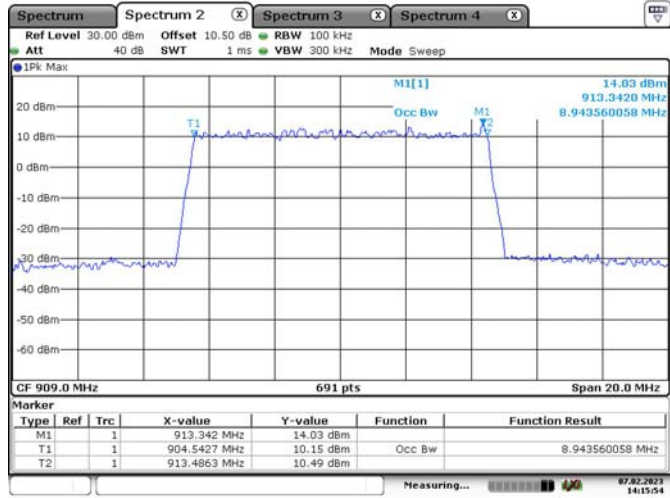


Date: 7.FEB.2023 14:15:54

10MHz, 16QAM  
Middle Channel

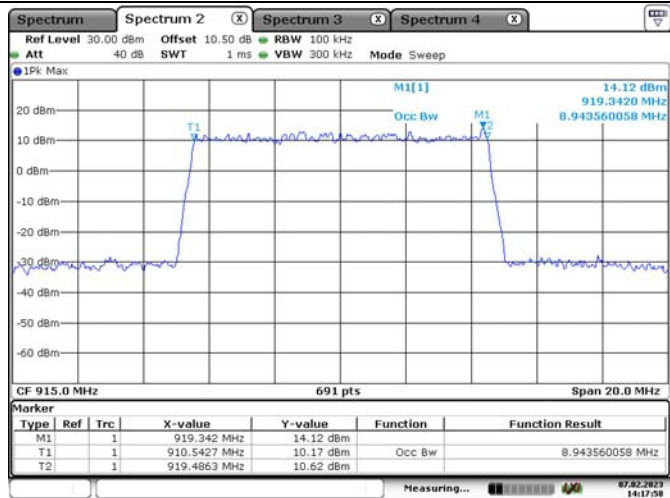

Date: 7.FEB.2023 14:17:58


10MHz, 16QAM  
Highest Channel

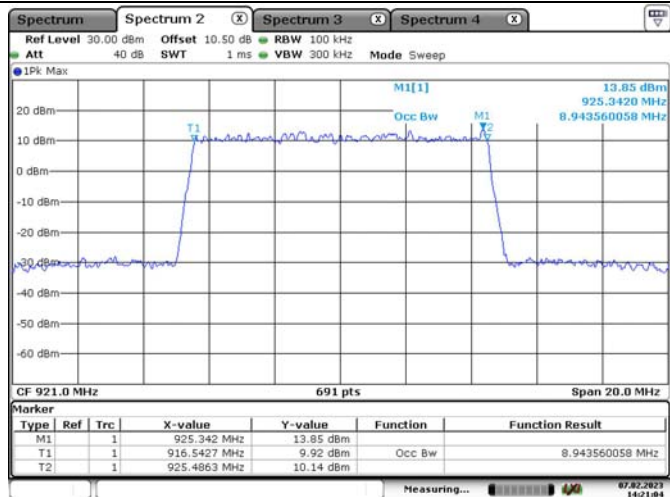

Date: 7.FEB.2023 14:21:04


### 99% Occupied Bandwidth

20MHz,QPSK  
Lowest Channel

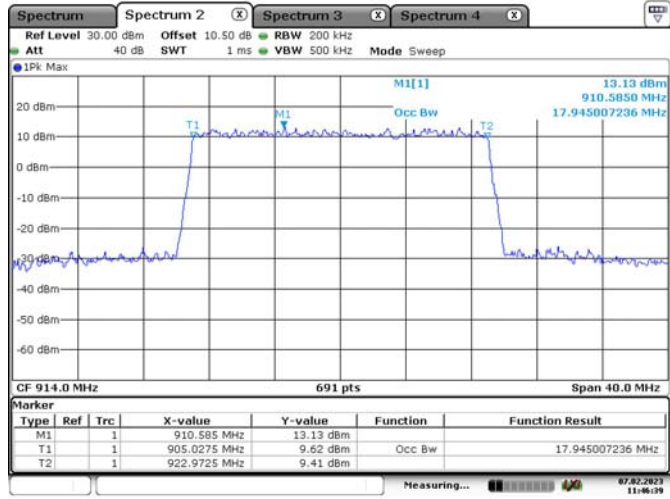

Date: 7.FEB.2023 11:46:40


20MHz,QPSK  
Highest Channel

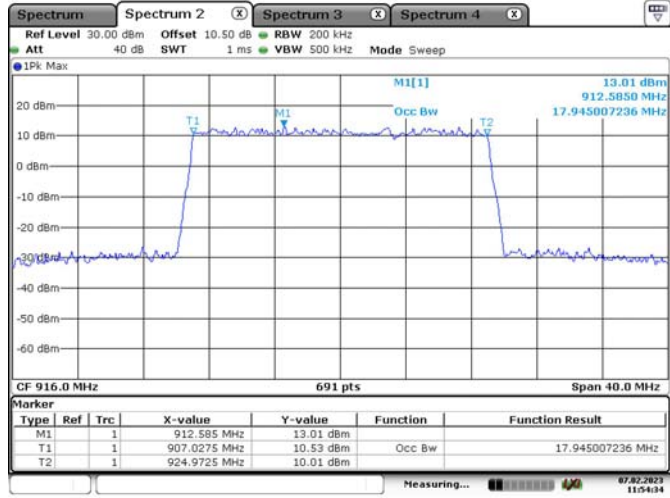

Date: 7.FEB.2023 11:54:34


### 99% Occupied Bandwidth

20MHz, 16QAM  
Lowest Channel

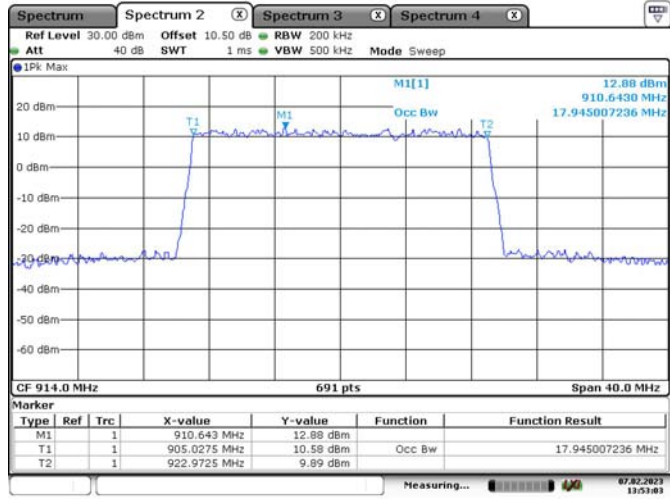

Date: 7.FEB.2023 13:53:02

20MHz, 16QAM  
Highest Channel

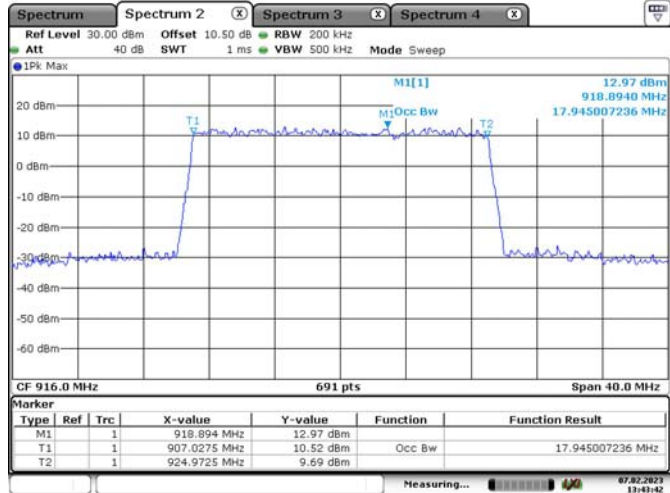


Date: 7.FEB.2023 13:43:42



2.4GHz Band:


99% Occupied Bandwidth

1.4MHz,QPSK  
Lowest Channel

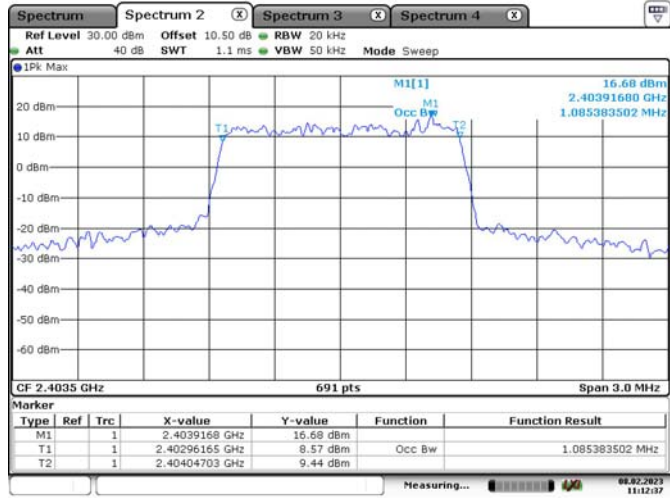


Date: 8.FEB.2023 11:12:38

1.4MHz,QPSK  
Middle Channel

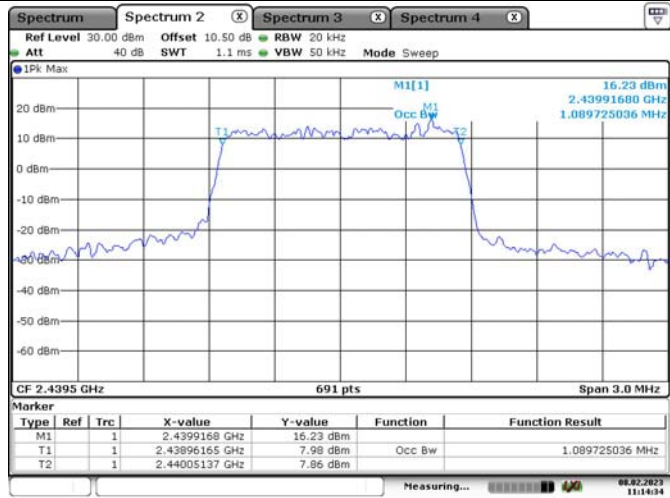

Date: 8.FEB.2023 11:14:34


1.4MHz,QPSK  
Highest Channel

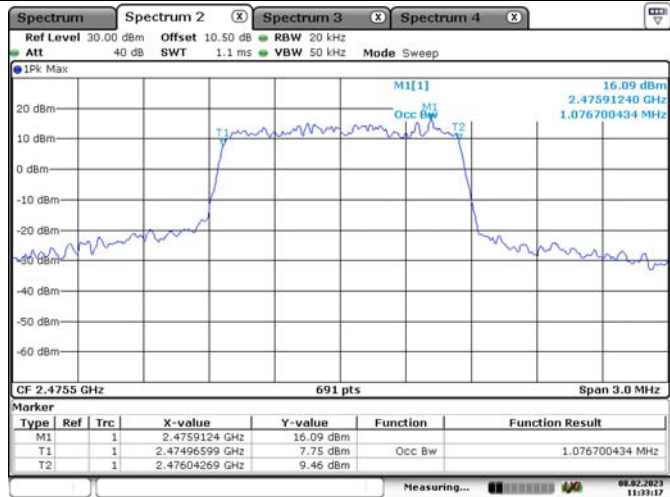

Date: 8.FEB.2023 11:33:17




### 99% Occupied Bandwidth

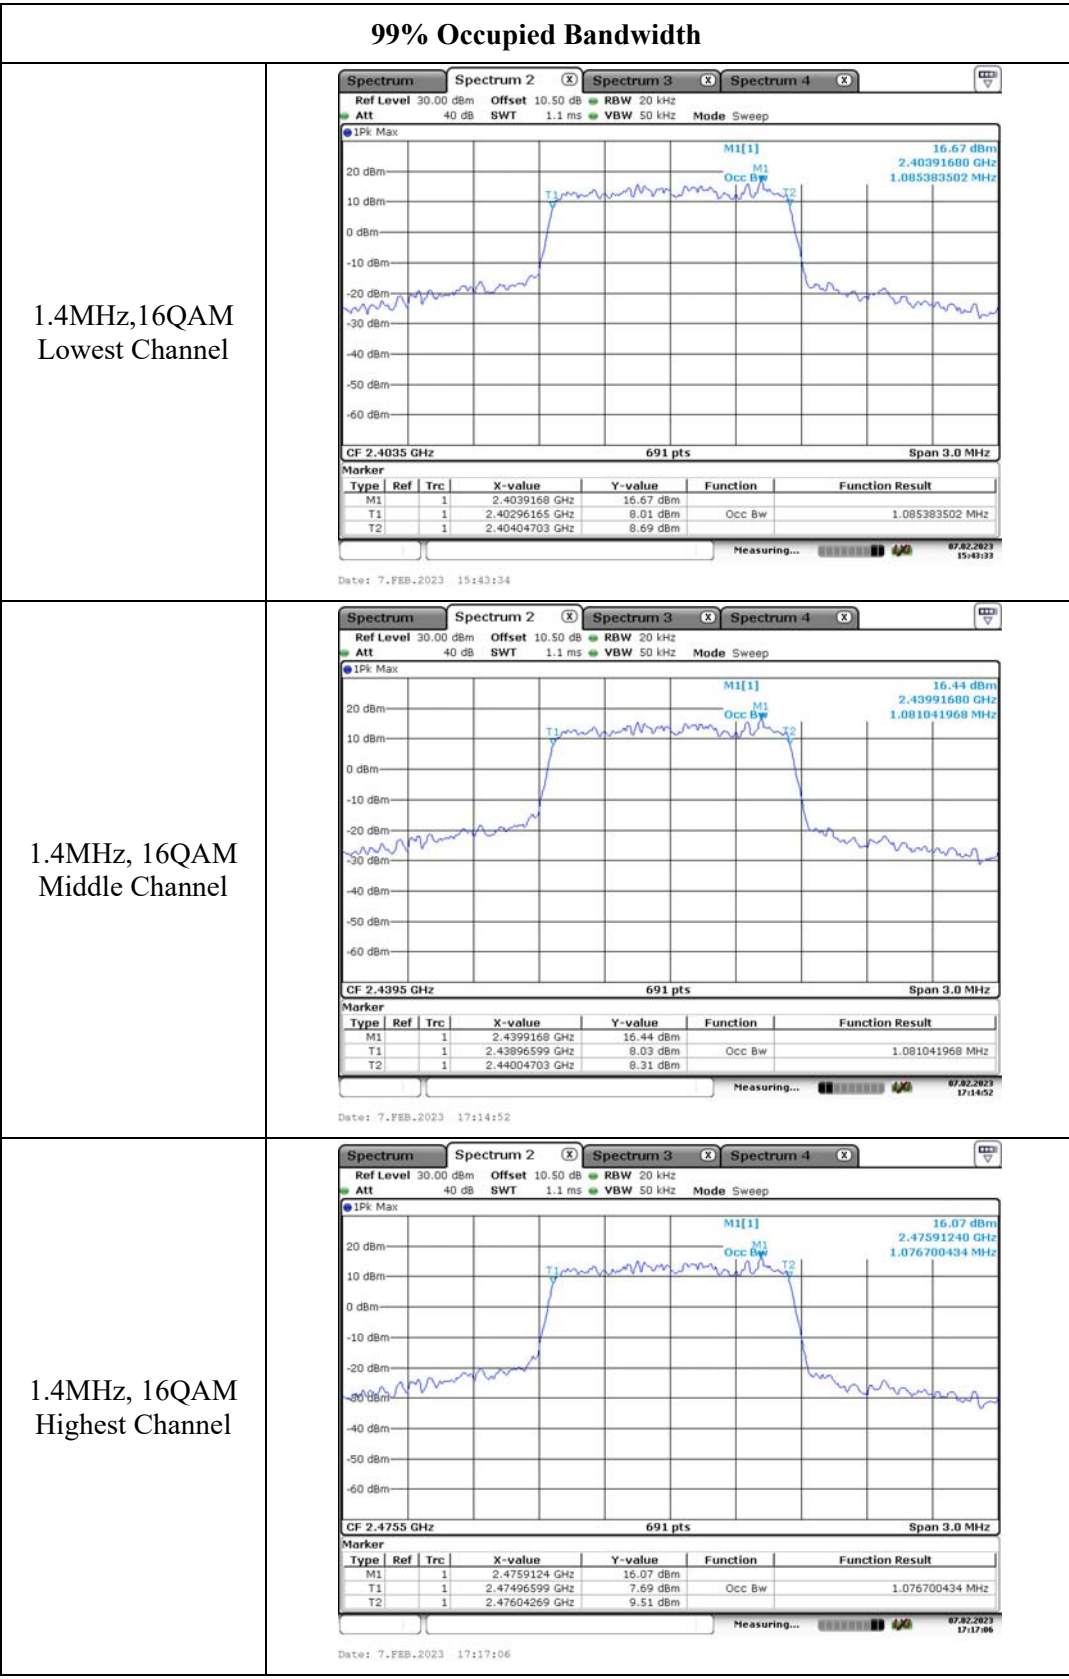


99% Occupied Bandwidth

10MHz,QPSK  
Lowest Channel

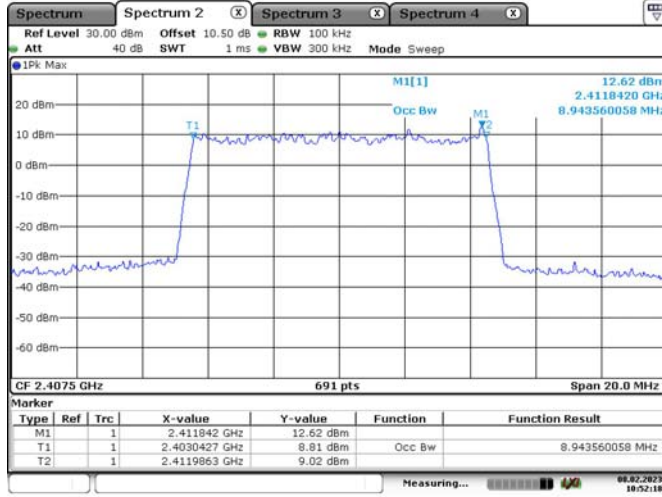


Date: 8.FEB.2023 10:52:18

10MHz,QPSK  
Middle Channel

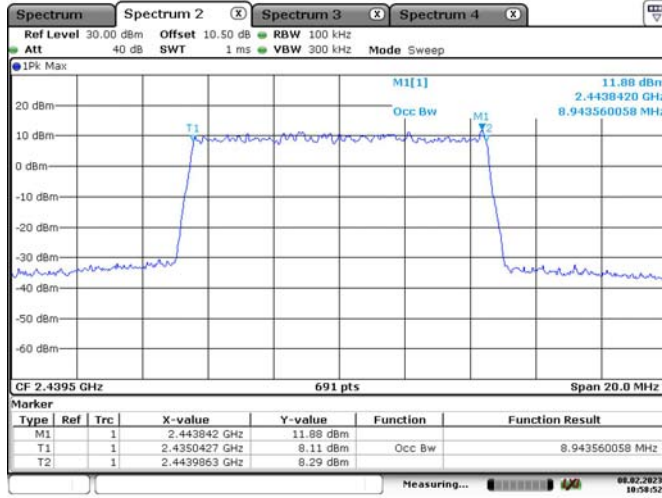

Date: 8.FEB.2023 10:58:52


10MHz,QPSK  
Highest Channel

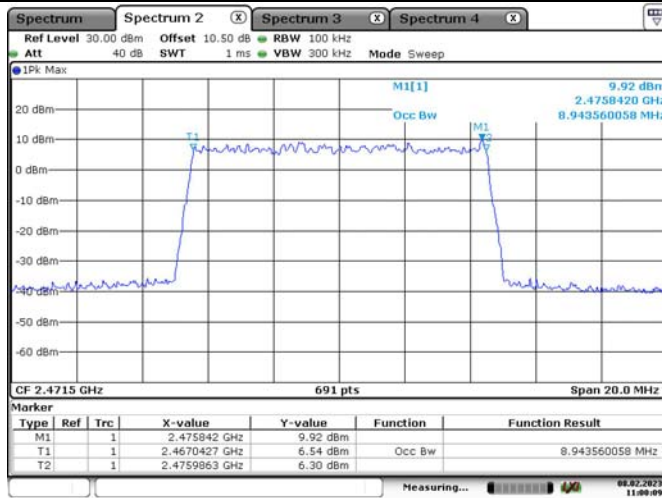

Date: 8.FEB.2023 11:00:09


### 99% Occupied Bandwidth

10MHz, 16QAM  
Lowest Channel

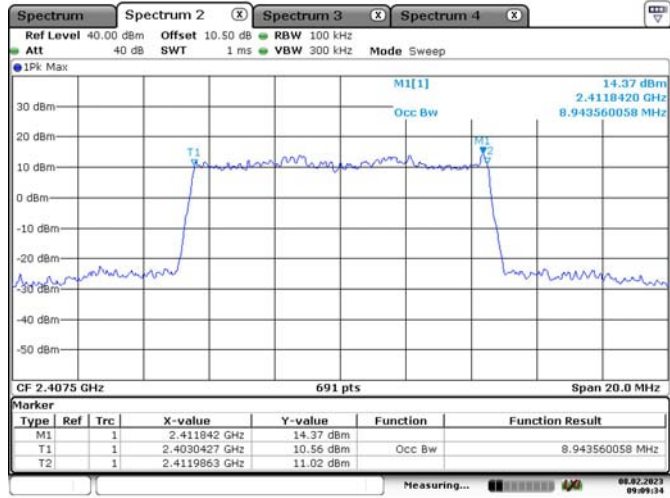


Date: 8.FEB.2023 09:09:35

10MHz, 16QAM  
Middle Channel

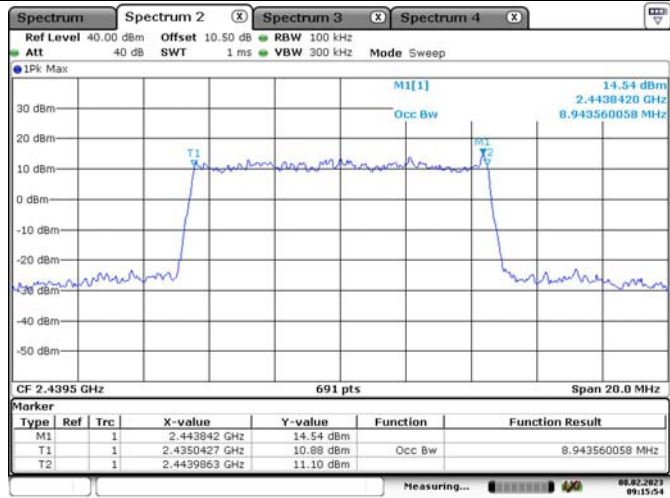

Date: 8.FEB.2023 09:15:54


10MHz, 16QAM  
Highest Channel

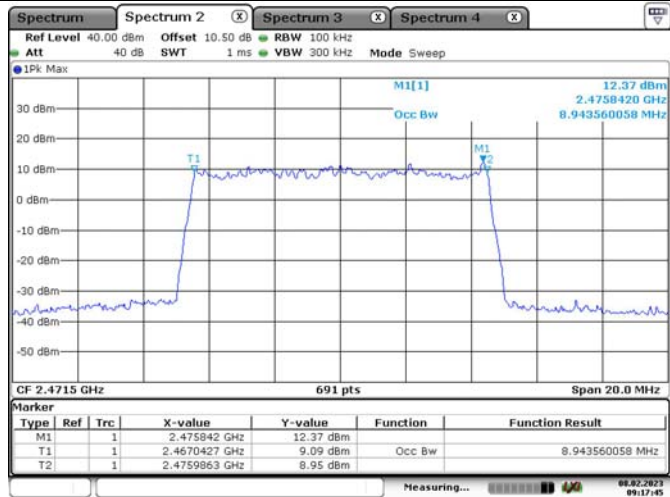

Date: 8.FEB.2023 09:17:45


### 99% Occupied Bandwidth

20MHz,QPSK  
Lowest Channel

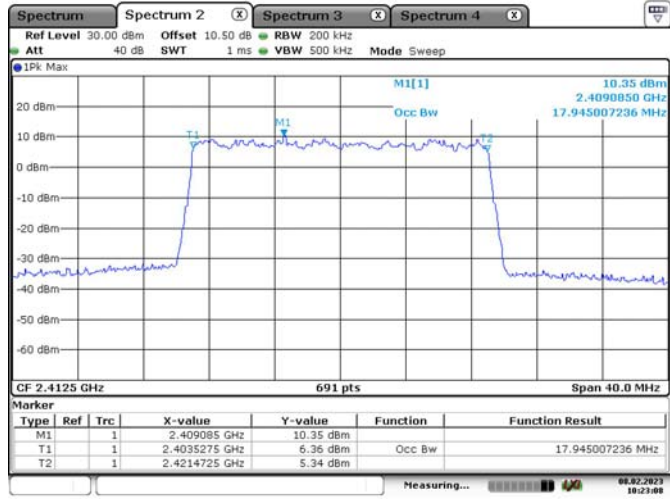


Date: 8.FEB.2023 10:23:08

20MHz, QPSK  
Middle Channel

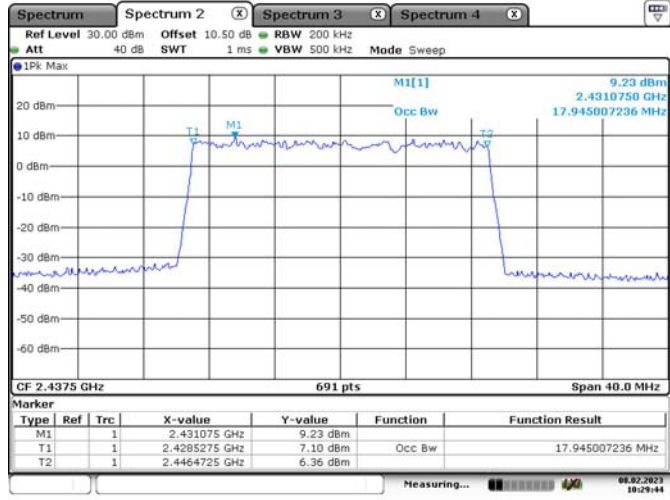

Date: 8.FEB.2023 10:29:44


20MHz,QPSK  
Highest Channel

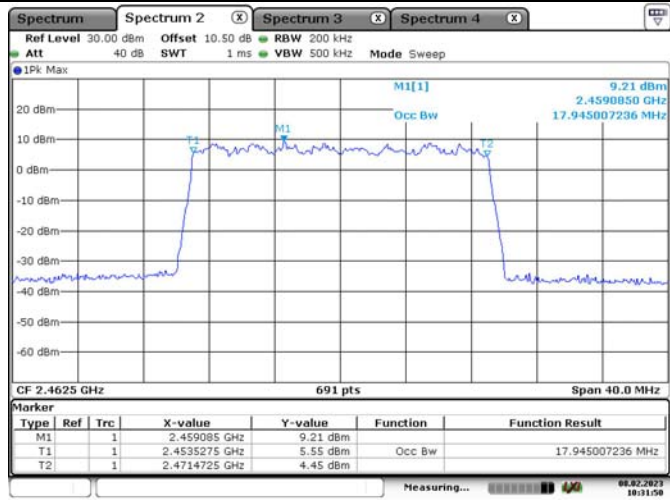

Date: 8.FEB.2023 10:31:50


### 99% Occupied Bandwidth

20MHz, 16QAM  
Lowest Channel

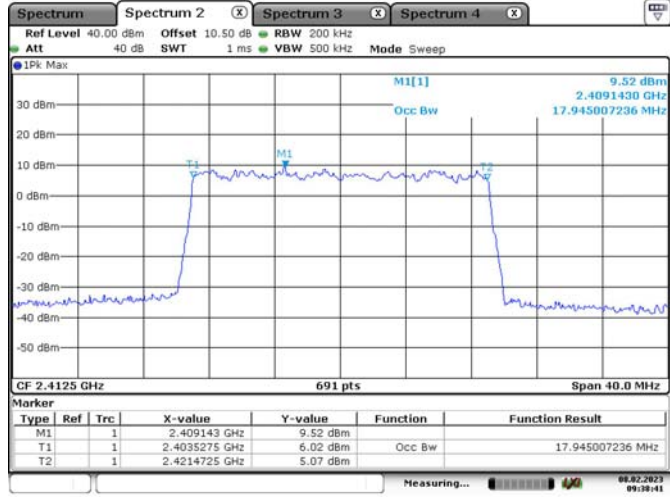


Date: 8.FEB.2023 09:38:41

20MHz, 16QAM  
Middle Channel

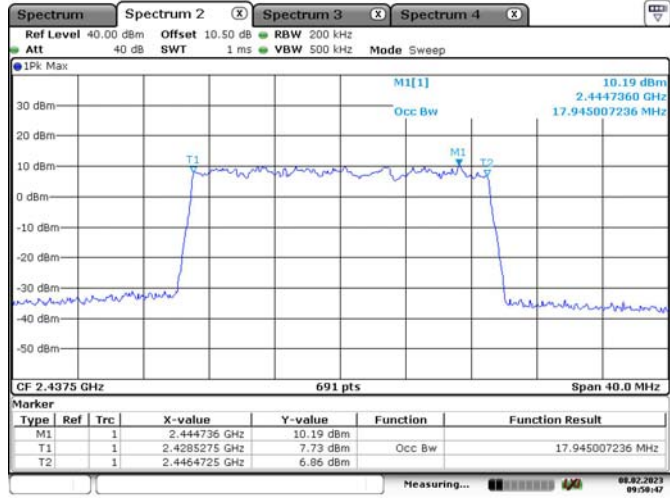

Date: 8.FEB.2023 09:50:48

20MHz, 16QAM  
Highest Channel

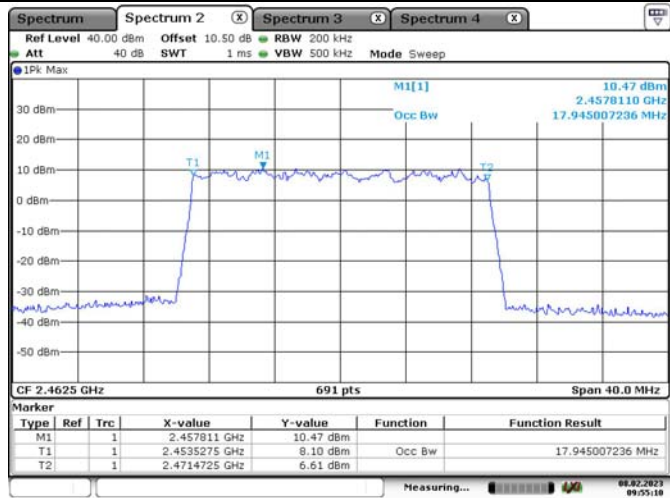

Date: 8.FEB.2023 09:55:11

**4.5 Maximum conducted output power:**

Serial Number:	1QAT-13	Test Date:	2023/02/07~2023/02/08
Test Site:	RF	Test Mode:	Transmitting
Tester:	Julie Tan	Test Result:	Pass

**Environmental Conditions:**

Temperature: (°C)	21.3	Relative Humidity: (%)	65	ATM Pressure: (kPa)	101.5
----------------------	------	------------------------------	----	------------------------	-------

**Test Equipment List and Details:**

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
zhuoxiang	Coaxial Cable	SMA-178	211003	Each time	N/A
eastsheep	Coaxial Attenuator	2W-SMA-JK-18G	21060302	Each time	N/A
Agilent	USB Wideband Power Sensor	U2021XA	MY54080015	2022/07/15	2023/07/14

\* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

**Test Data:**

**900MHz Band:**

Modulation	Test Modes	Test Frequency (MHz)	Maximum Conducted Average Output Power (dBm)			Limit (dBm)
			Chain 0	Chain 2	Total	
QPSK	1.4M	904	17.38	18.59	21.04	≤30
		916	17.42	18.68	21.11	≤30
		926	17.56	18.65	21.15	≤30
	10M	909	22.85	24.18	26.58	≤30
		915	22.97	23.9	26.47	≤30
		921	22.88	24.07	26.53	≤30
	20M	914	22.96	23.97	26.50	≤30
916		23.19	24.11	26.68	≤30	
16-QAM	1.4M	904	18.45	19.74	22.15	≤30
		916	17.46	18.60	21.08	≤30
		926	18.23	19.49	21.92	≤30
	10M	909	23.09	23.92	26.54	≤30
		915	22.89	24.12	26.56	≤30
		921	23.07	23.94	26.54	≤30
	20M	914	22.89	24.2	26.60	≤30
		916	22.91	24.16	26.59	≤30

Note:

Maximum Antenna gain is 0.3dBi. Maximum EIRP=26.68+0.3=26.98dBm, meet RSS-247 EIRP limit.

**2.4GHz band:**

Modulation	Test Modes	Test Frequency (MHz)	Maximum Conducted Average Output Power (dBm)			Limit (dBm)
			Chain 0	Chain 2	Total	
QPSK	1.4M	2403.5	23.81	23.28	26.56	≤30
		2439.5	24.28	24.07	27.19	≤30
		2475.5	22.75	23.66	26.24	≤30
	10M	2407.5	19.75	20.7	23.26	≤30
		2439.5	20.65	19.68	23.20	≤30
		2471.5	20.05	19.69	22.88	≤30
	20M	2412.5	18.91	19.16	22.05	≤30
		2437.5	18.56	18.87	21.73	≤30
		2462.5	18.47	18.94	21.72	≤30
16-QAM	1.4M	2403.5	23.83	23.86	26.86	≤30
		2439.5	24.35	23.88	27.13	≤30
		2475.5	22.65	23.78	26.26	≤30
	10M	2407.5	22.17	21.93	25.06	≤30
		2439.5	22.33	22.45	25.40	≤30
		2471.5	20.73	20.22	23.49	≤30
	20M	2412.5	18.92	18.62	21.78	≤30
		2437.5	20.16	20.69	23.44	≤30
		2462.5	19.72	19.67	22.71	≤30

Note:

Maximum Antenna gain is 1.9dBi, Maximum EIRP=27.19+1.9=29.09dBm, meet RSS-247 EIRP limit.



**4.6 Maximum power spectral density:**

Serial Number:	1QAT-13	Test Date:	2023/02/07~2023/02/08
Test Site:	RF	Test Mode:	Transmitting
Tester:	Julie Tan	Test Result:	Pass

**Environmental Conditions:**

Temperature: (°C)	21.3	Relative Humidity: (%)	65	ATM Pressure: (kPa)	101.5
----------------------	------	------------------------------	----	------------------------	-------

**Test Equipment List and Details:**

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSV40	101943	2022/07/25	2023/07/24
zhuoxiang	Coaxial Cable	SMA-178	211003	Each time	N/A
Mini-Circuits	DC Block	BLK-18-S+	1554404	Each time	N/A
eastsheep	Coaxial Attenuator	2W-SMA-JK-18G	21060302	Each time	N/A

*\* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).*

**Test Data:**




**900MHz Band:**


Modulation	Test Modes	Test Frequency (MHz)	Power Spectral Density (dBm/3kHz)			Limit (dBm/3kHz)
			Chain 0	Chain 2	Total	
QPSK	1.4M	904	-1.89	-0.89	1.65	≤8.00
		916	-1.98	-0.75	1.69	≤8.00
		926	-1.94	-0.93	1.60	≤8.00
	10M	909	-6.45	-5.17	-2.75	≤8.00
		915	-6.34	-5.14	-2.69	≤8.00
		921	-6.03	-5.24	-2.61	≤8.00
	20M	914	-8.9	-7.98	-5.41	≤8.00
916		-8.94	-7.54	-5.17	≤8.00	
16-QAM	1.4M	904	-0.89	0.2	2.70	≤8.00
		916	-2.04	-0.85	1.61	≤8.00
		926	-1.35	-0.04	2.36	≤8.00
	10M	909	-6.15	-5.03	-2.54	≤8.00
		915	-6.36	-5.23	-2.75	≤8.00
		921	-6.53	-5	-2.69	≤8.00
	20M	914	-8.99	-7.8	-5.34	≤8.00
		916	-8.69	-8.05	-5.35	≤8.00


**2.4GHz band:**


Modulation	Test Modes	Test Frequency (MHz)	Power Spectral Density (dBm/3kHz)			Limit (dBm/3kHz)
			Chain 0	Chain 2	Total	
QPSK	1.4M	2403.5	3.88	4.31	7.11	≤8.00
		2439.5	3.30	3.33	6.33	≤8.00
		2475.5	4.48	4.66	7.58	≤8.00
	10M	2407.5	-8.23	-8.44	-5.32	≤8.00
		2439.5	-8.11	-8.03	-5.06	≤8.00
		2471.5	-8.29	-8.39	-5.33	≤8.00
	20M	2412.5	-12.35	-12.61	-9.47	≤8.00
2437.5		-12.61	-12.44	-9.51	≤8.00	
2462.5		-12.99	-12.59	-9.78	≤8.00	
16-QAM	1.4M	2403.5	4.95	4.54	7.76	≤8.00
		2439.5	4.61	4.66	7.65	≤8.00
		2475.5	4.65	4.43	7.55	≤8.00
	10M	2407.5	-6.45	-6.01	-3.21	≤8.00
		2439.5	-5.51	-6.04	-2.76	≤8.00
		2471.5	-8.18	-8.38	-5.27	≤8.00
	20M	2412.5	-12.69	-12.87	-9.77	≤8.00
		2437.5	-11.24	-11.45	-8.33	≤8.00
		2462.5	-11.53	-11.56	-8.53	≤8.00


**900MHz Band:  
Chain 0:**

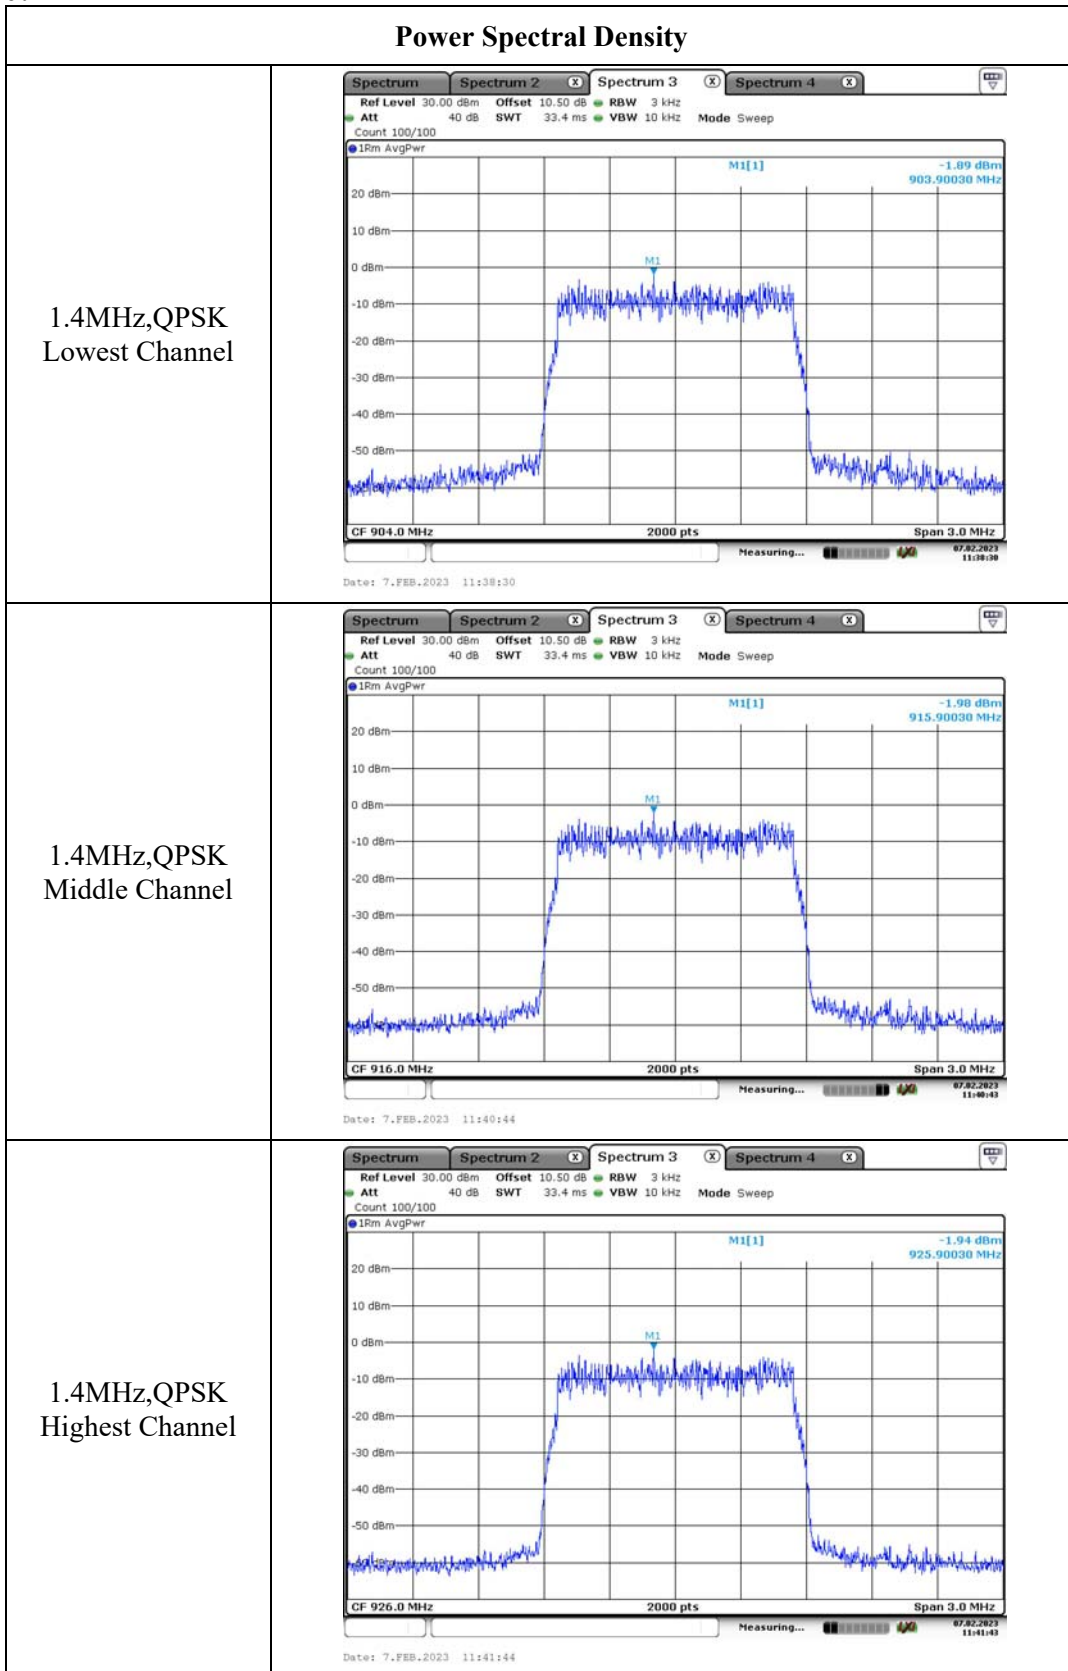


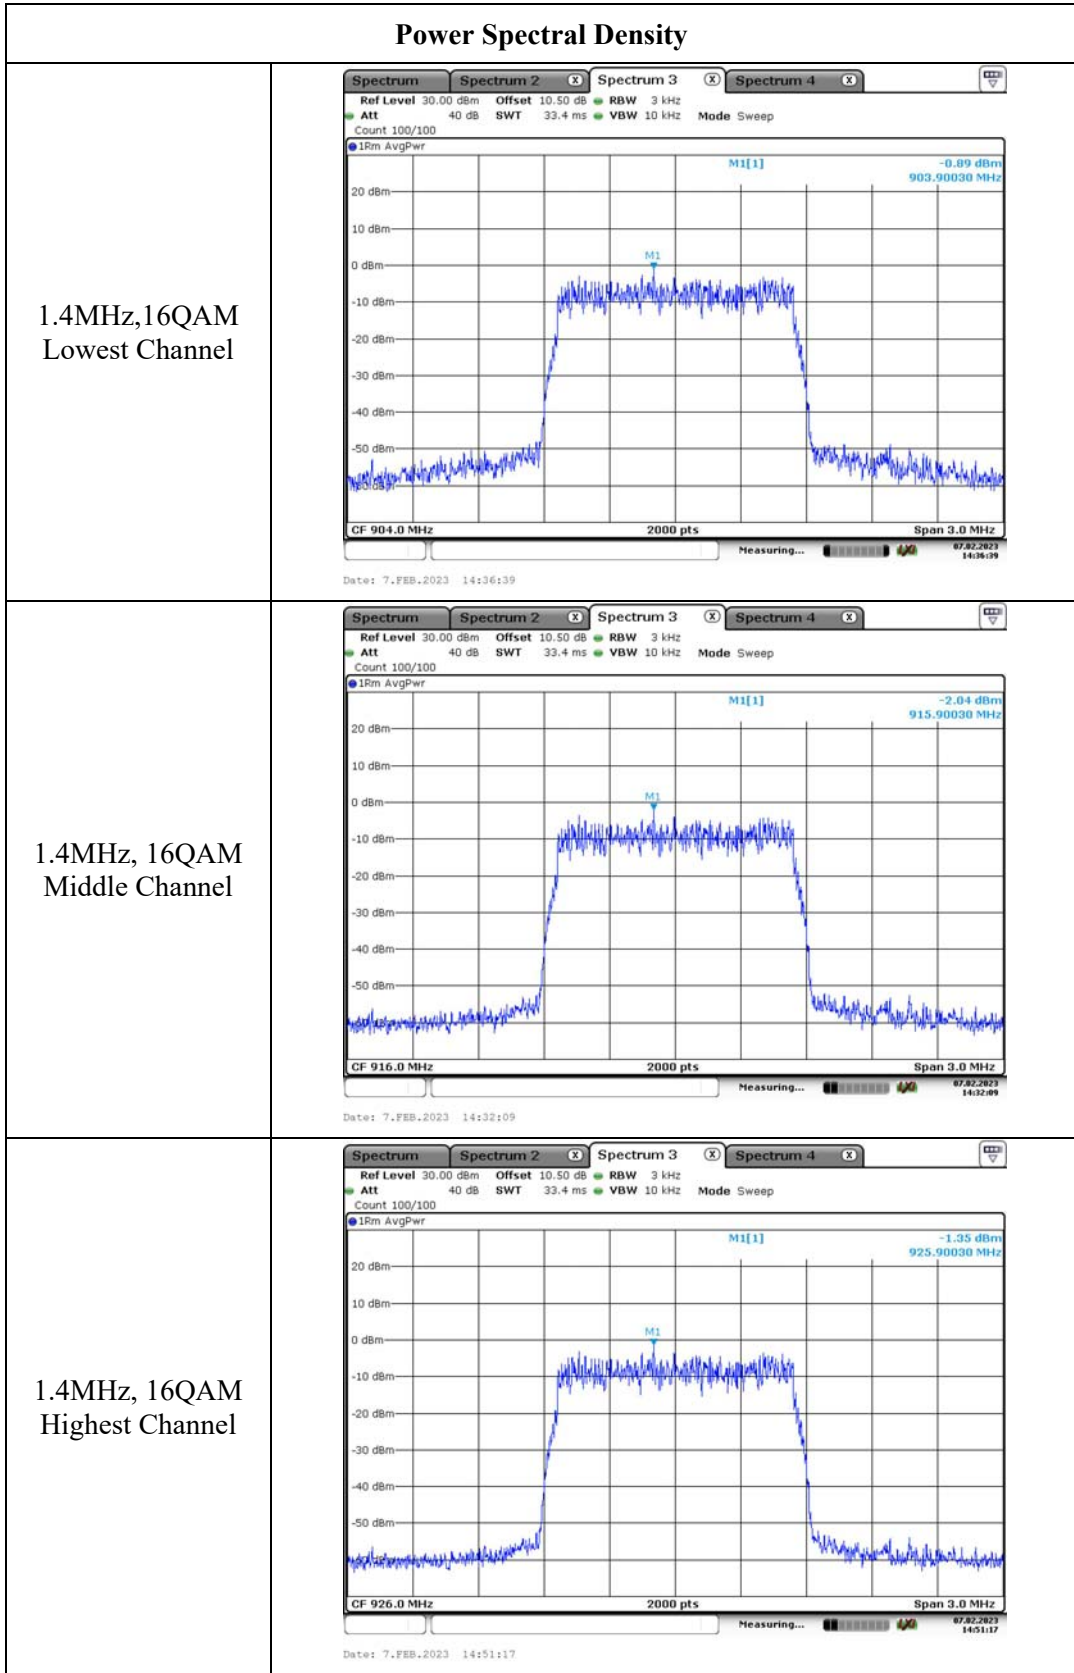

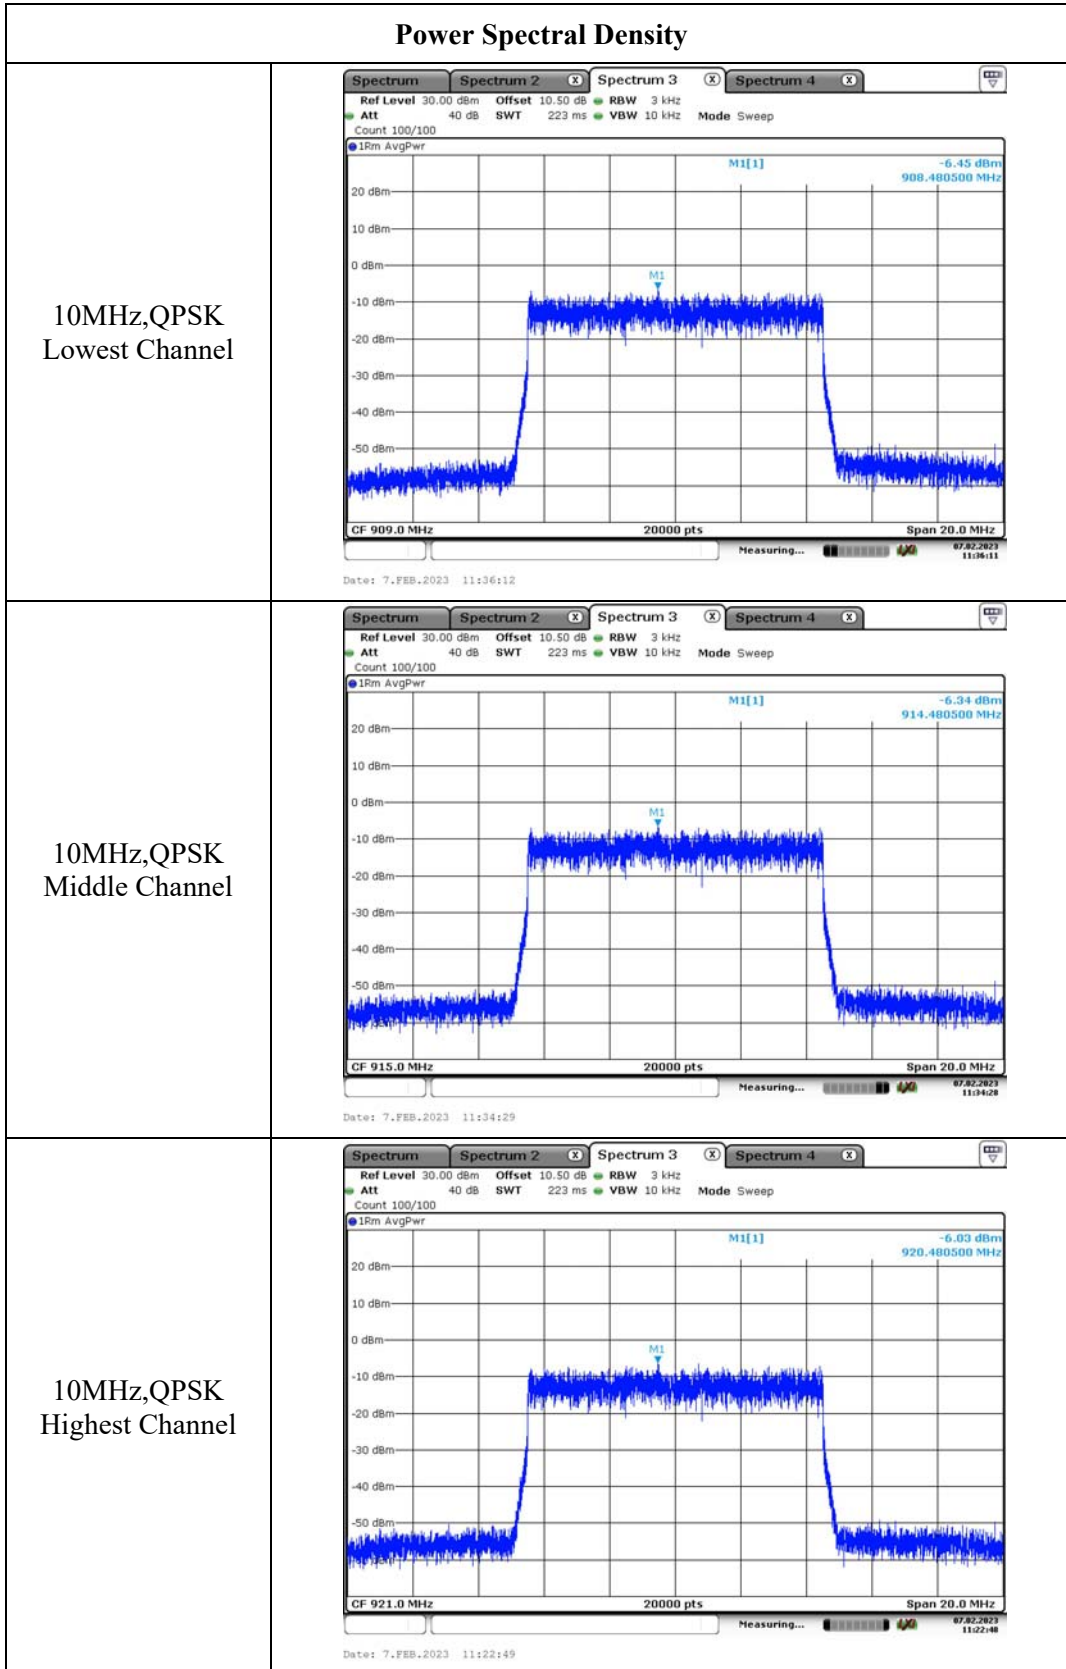

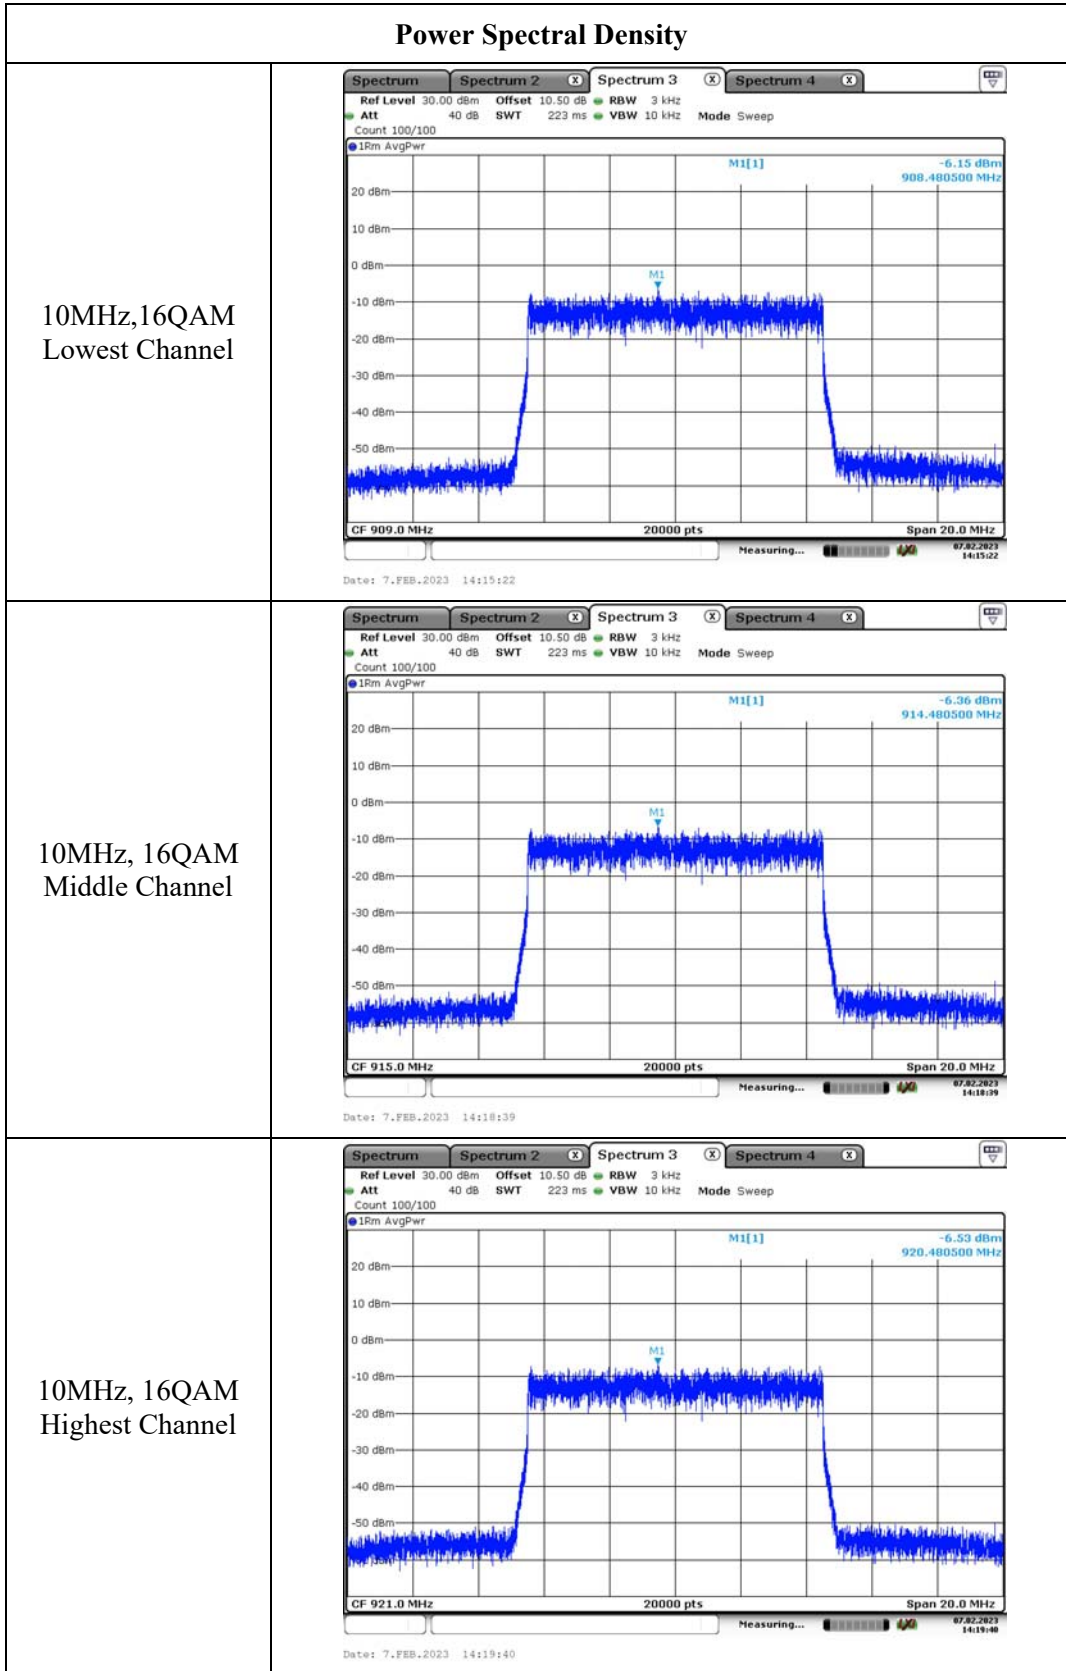


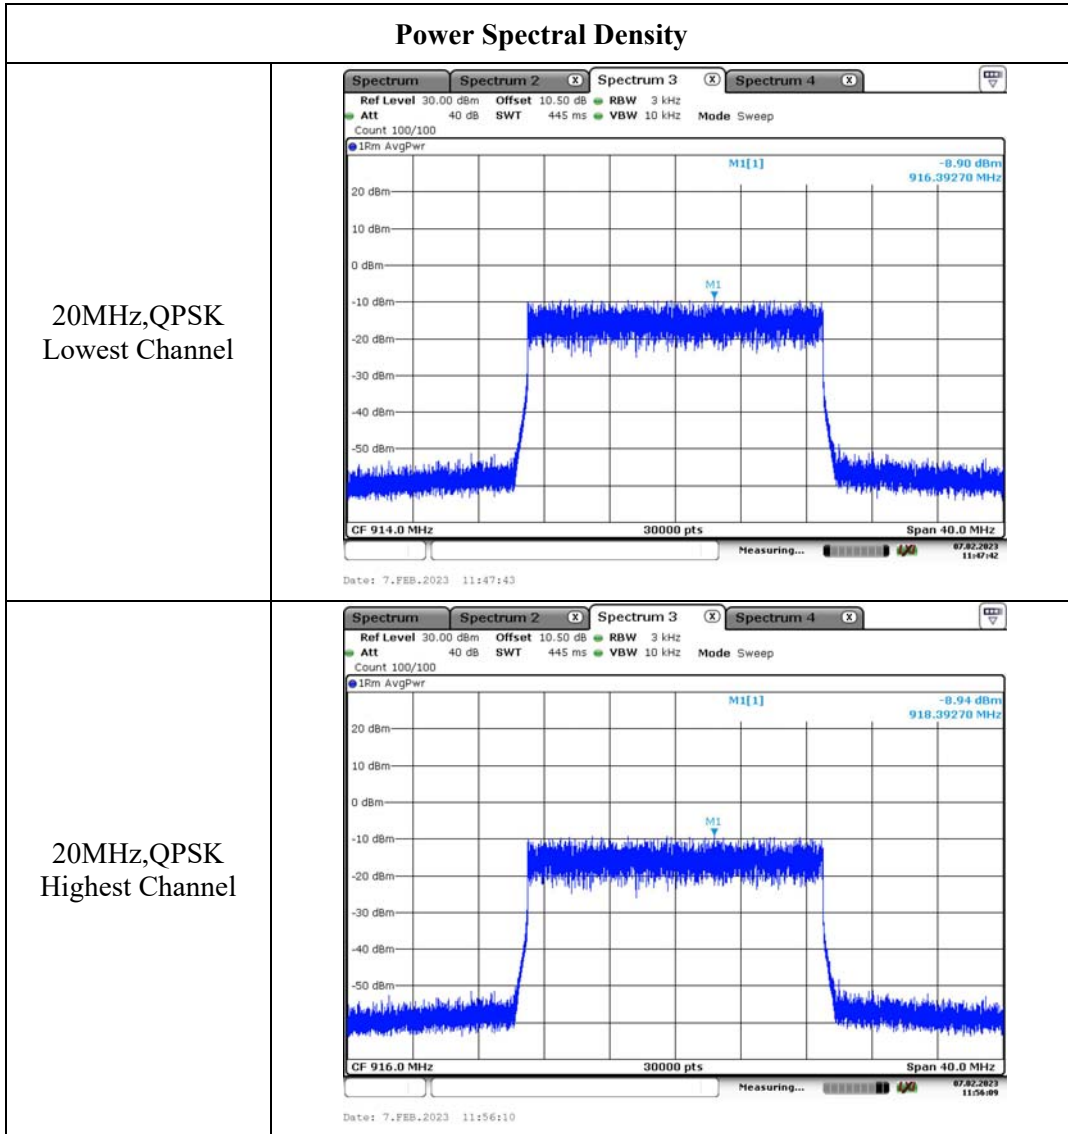

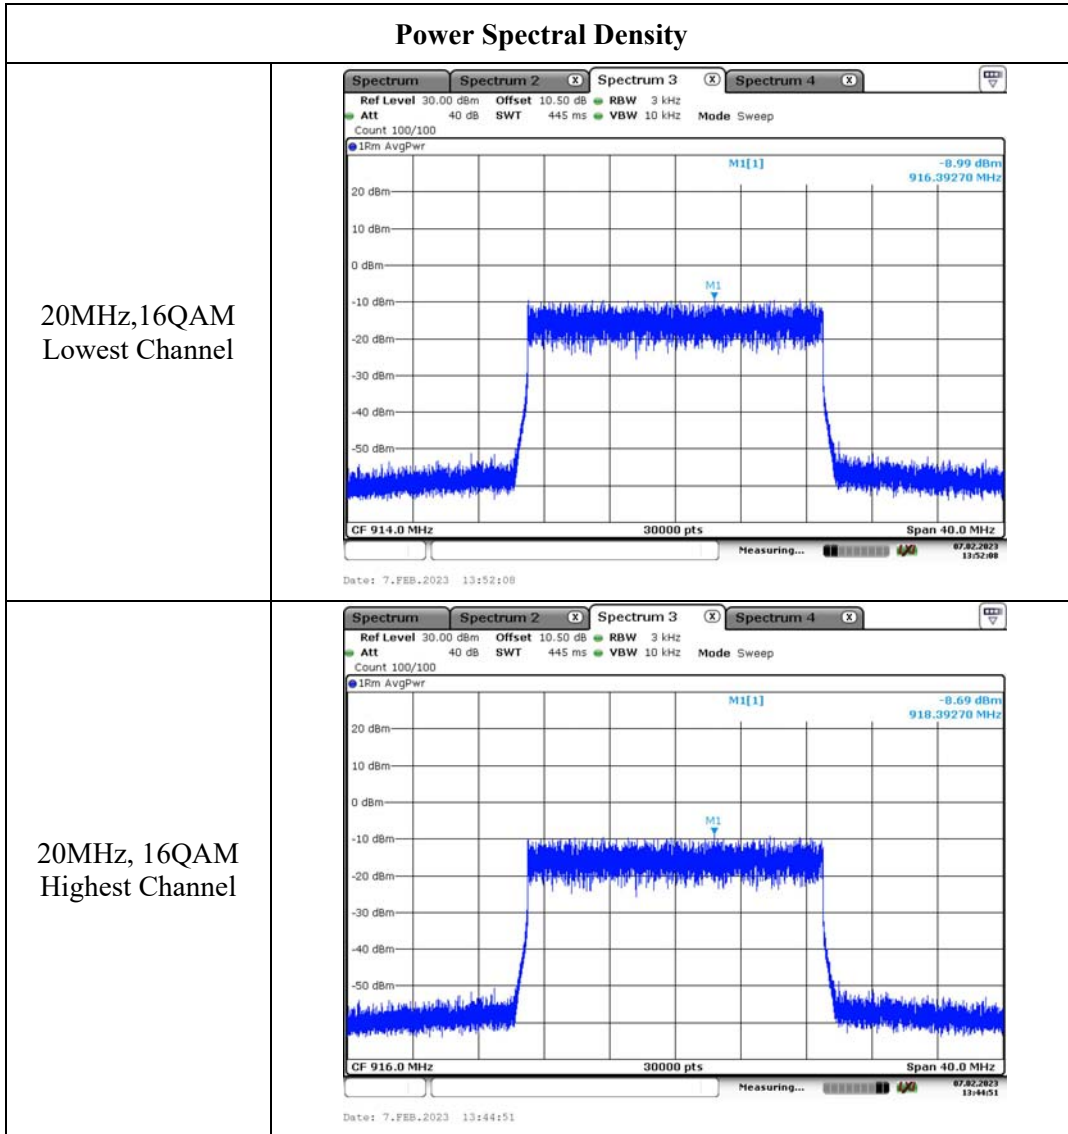




Chain 2:

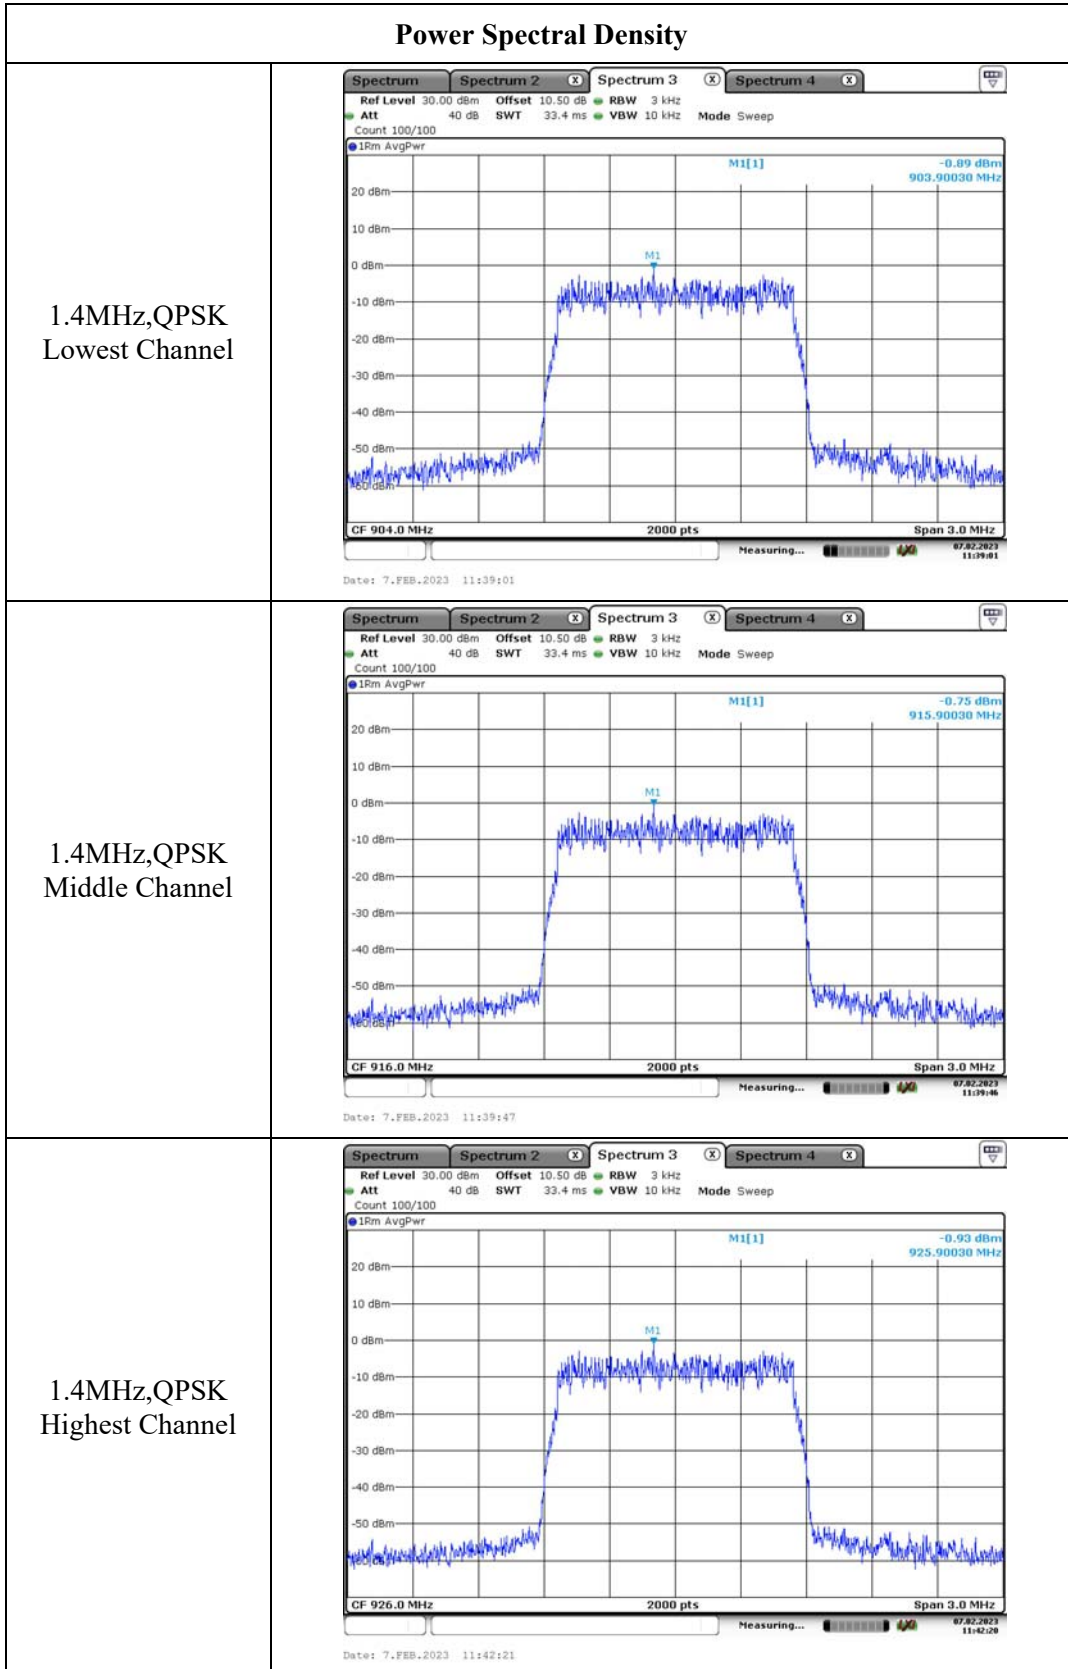




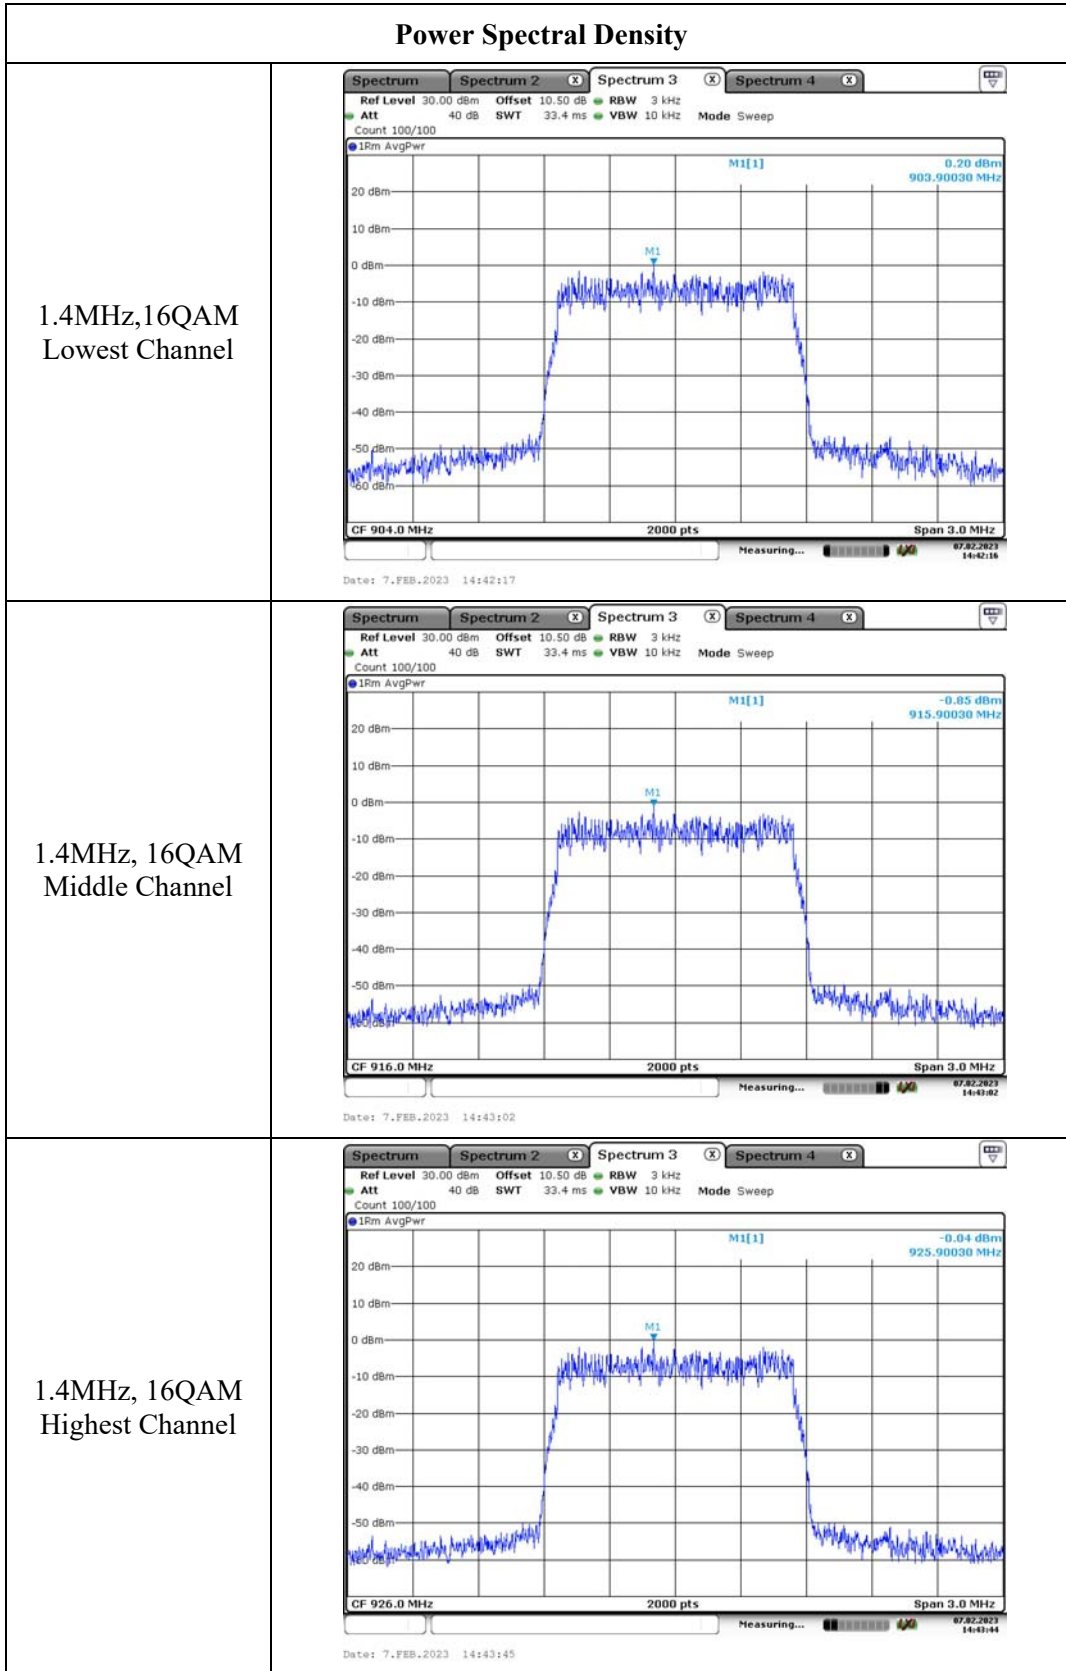


### Power Spectral Density


10MHz,QPSK  
Lowest Channel

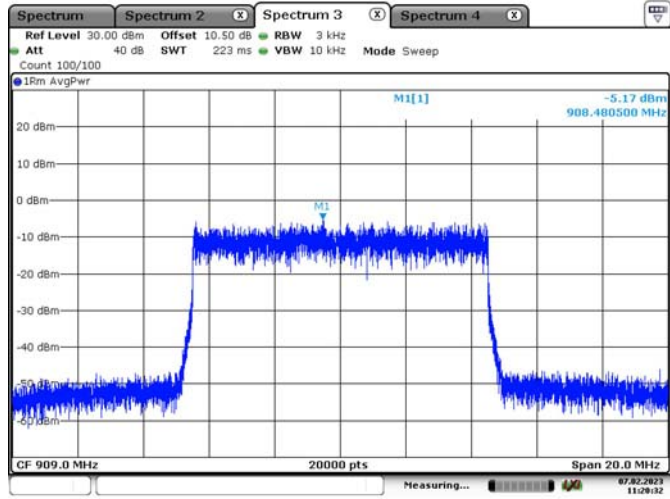


10MHz,QPSK  
Middle Channel

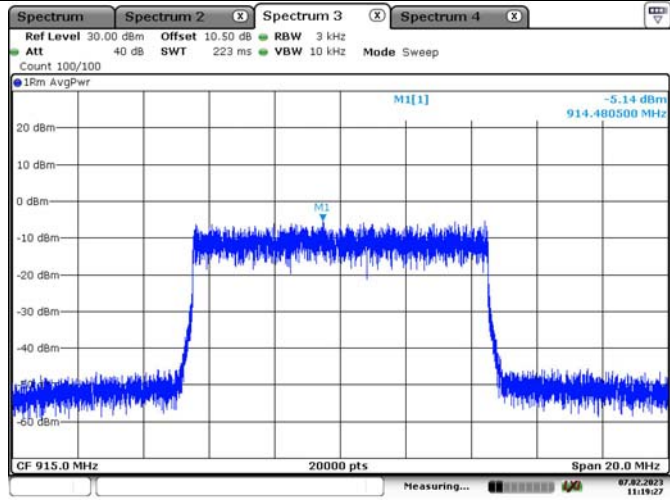


10MHz,QPSK  
Highest Channel

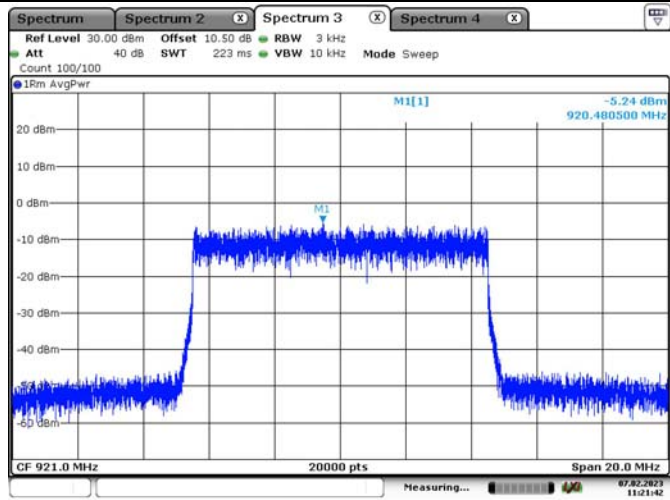

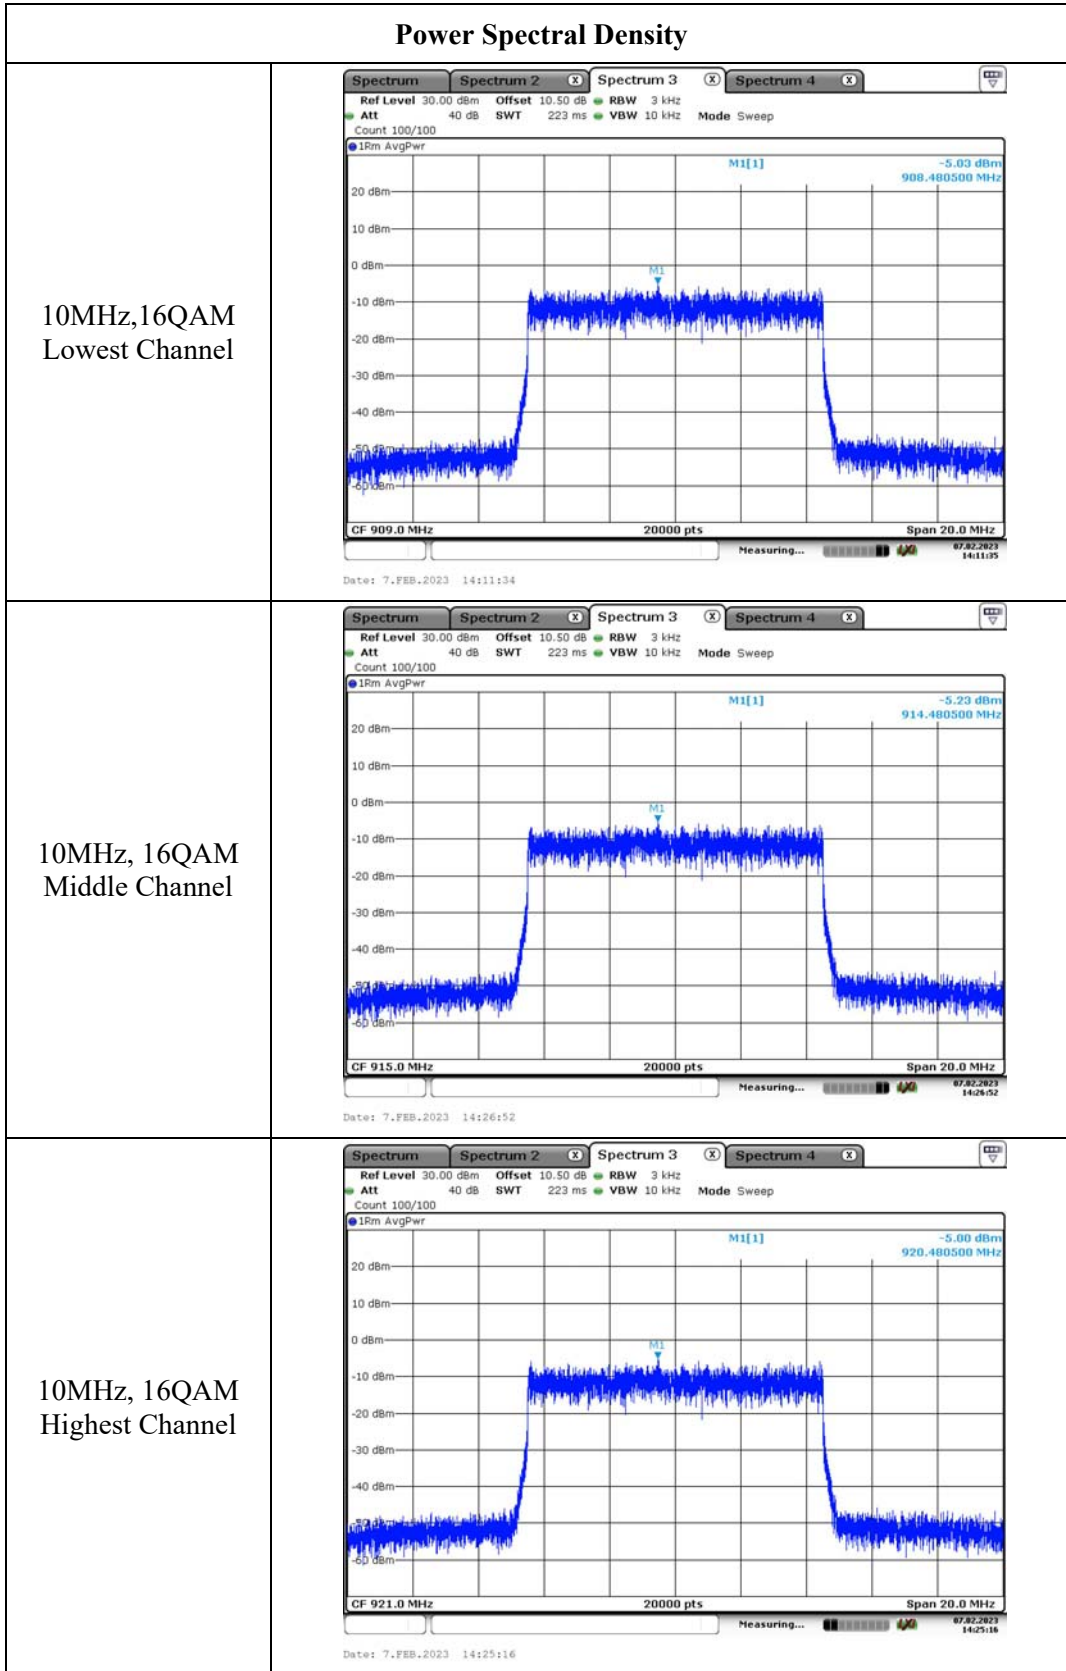



### Power Spectral Density

20MHz,QPSK  
Lowest Channel

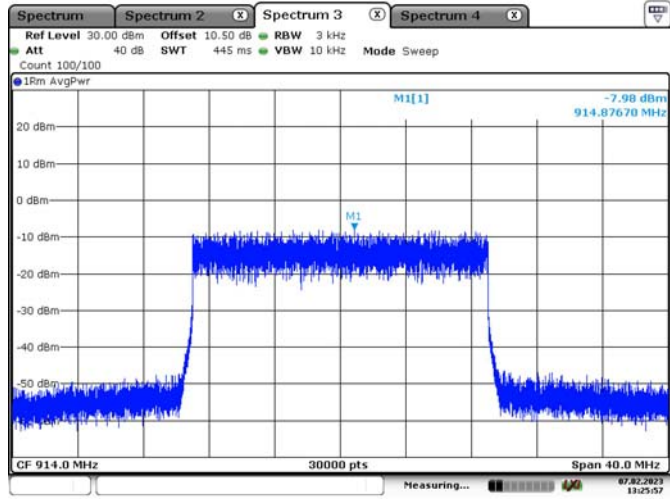


20MHz,QPSK  
Highest Channel

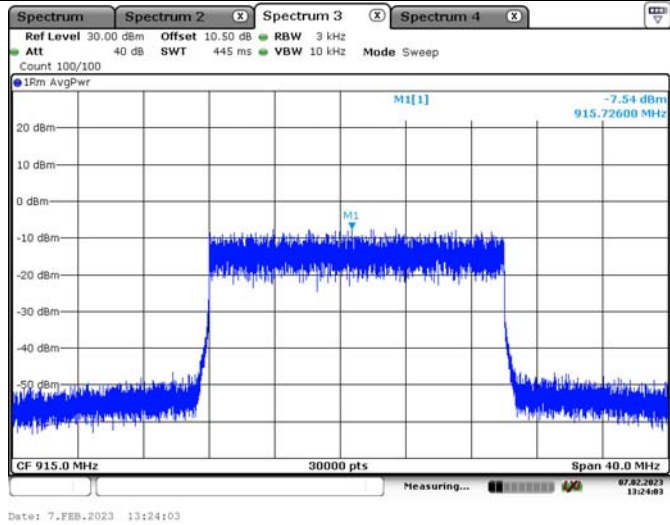

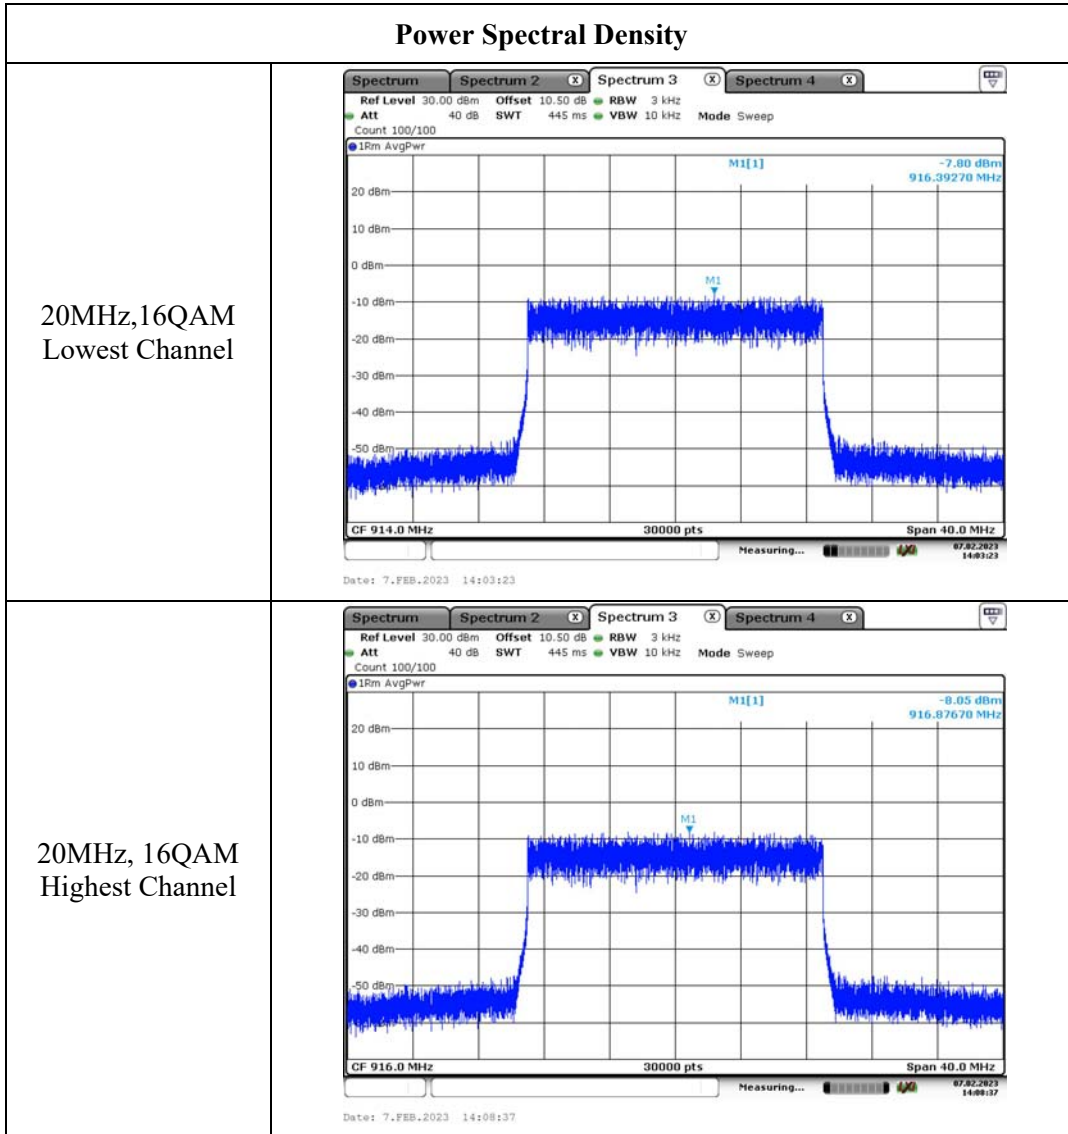


**2.4GHz Band:  
Chain 0:**

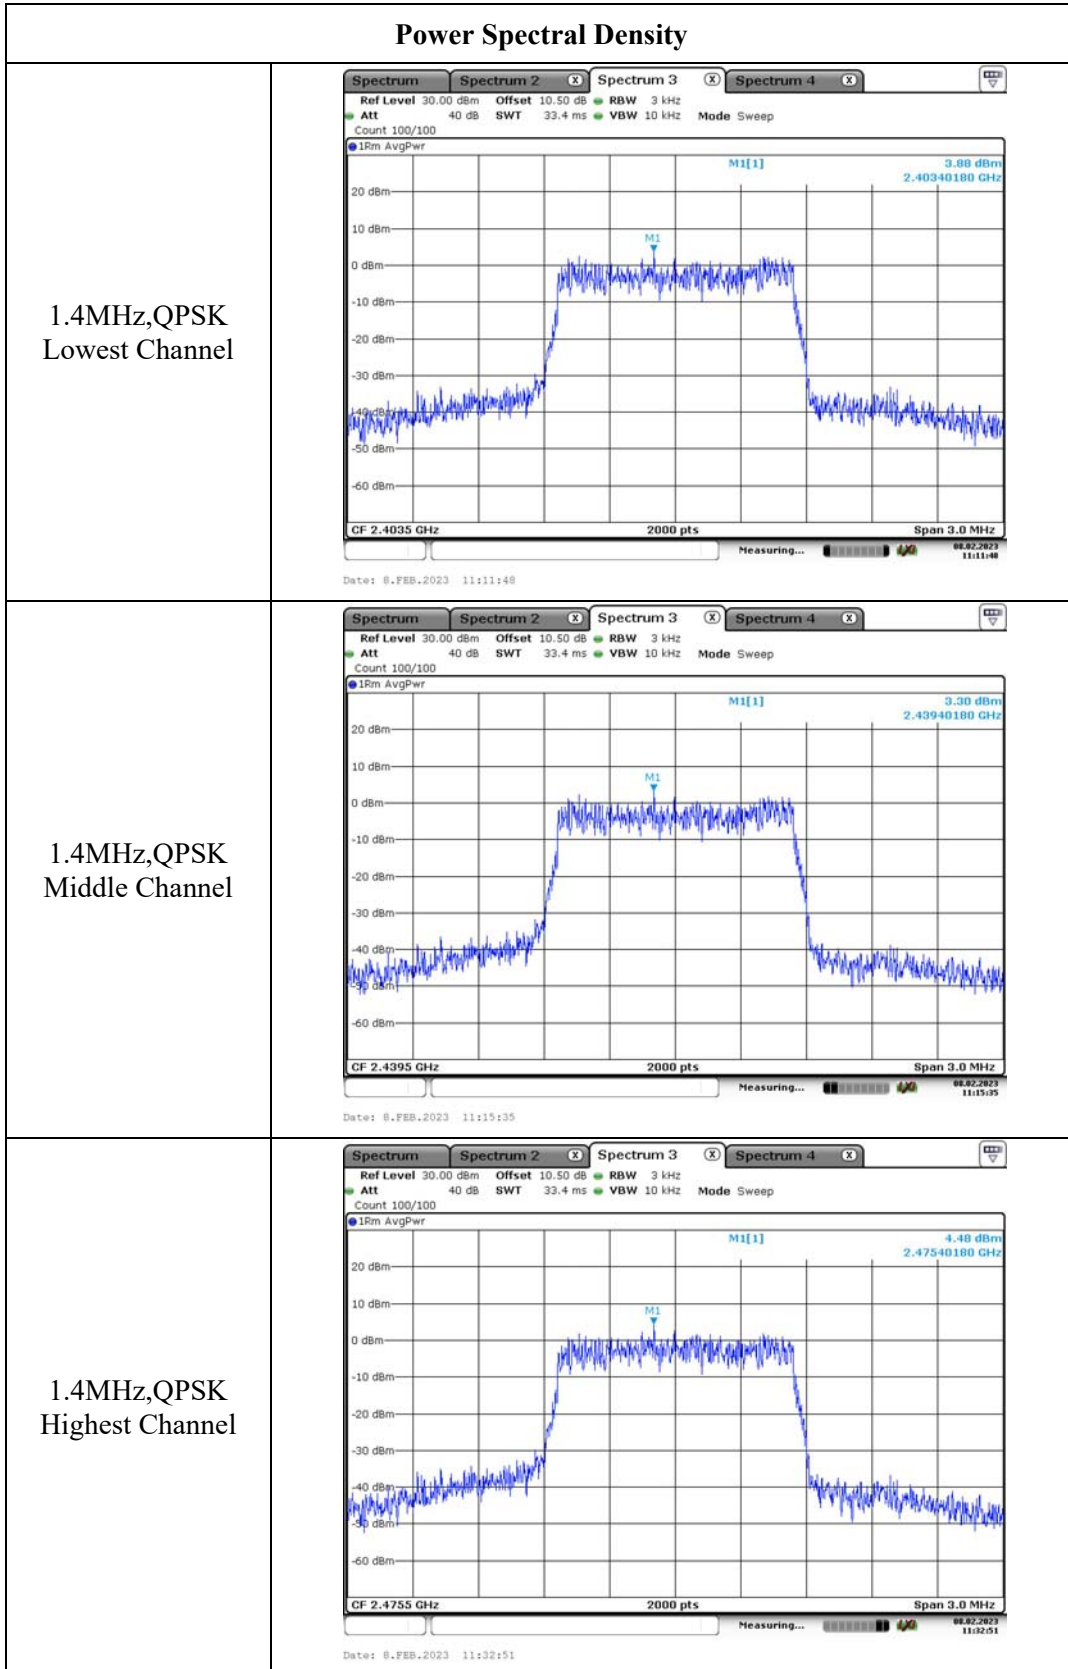






<b>Power Spectral Density</b>	
1.4MHz, 16QAM Lowest Channel	<p>                     Spectrum 2 x Spectrum 3 x Spectrum 4 x                      Ref Level 30.00 dBm Offset 10.50 dB RBW 3 kHz                      Att 40 dB SWT 33.4 ms VBW 10 kHz Mode Sweep                      Count 100/100                      IRm AvgPwr                      M1[1] 4.95 dBm                      2.40340180 GHz                      CF 2.4035 GHz 2000 pts Span 3.0 MHz                      Date: 7.FEB.2023 15:44:41                 </p>
1.4MHz, 16QAM Middle Channel	<p>                     Spectrum 2 x Spectrum 3 x Spectrum 4 x                      Ref Level 30.00 dBm Offset 10.50 dB RBW 3 kHz                      Att 40 dB SWT 33.4 ms VBW 10 kHz Mode Sweep                      Count 100/100                      IRm AvgPwr                      M1[1] 4.61 dBm                      2.43940180 GHz                      CF 2.4395 GHz 2000 pts Span 3.0 MHz                      Date: 7.FEB.2023 17:15:20                 </p>
1.4MHz, 16QAM Highest Channel	<p>                     Spectrum 2 x Spectrum 3 x Spectrum 4 x                      Ref Level 30.00 dBm Offset 10.50 dB RBW 3 kHz                      Att 40 dB SWT 33.4 ms VBW 10 kHz Mode Sweep                      Count 100/100                      IRm AvgPwr                      M1[1] 4.65 dBm                      2.47540180 GHz                      CF 2.4755 GHz 2000 pts Span 3.0 MHz                      Date: 7.FEB.2023 17:16:24                 </p>

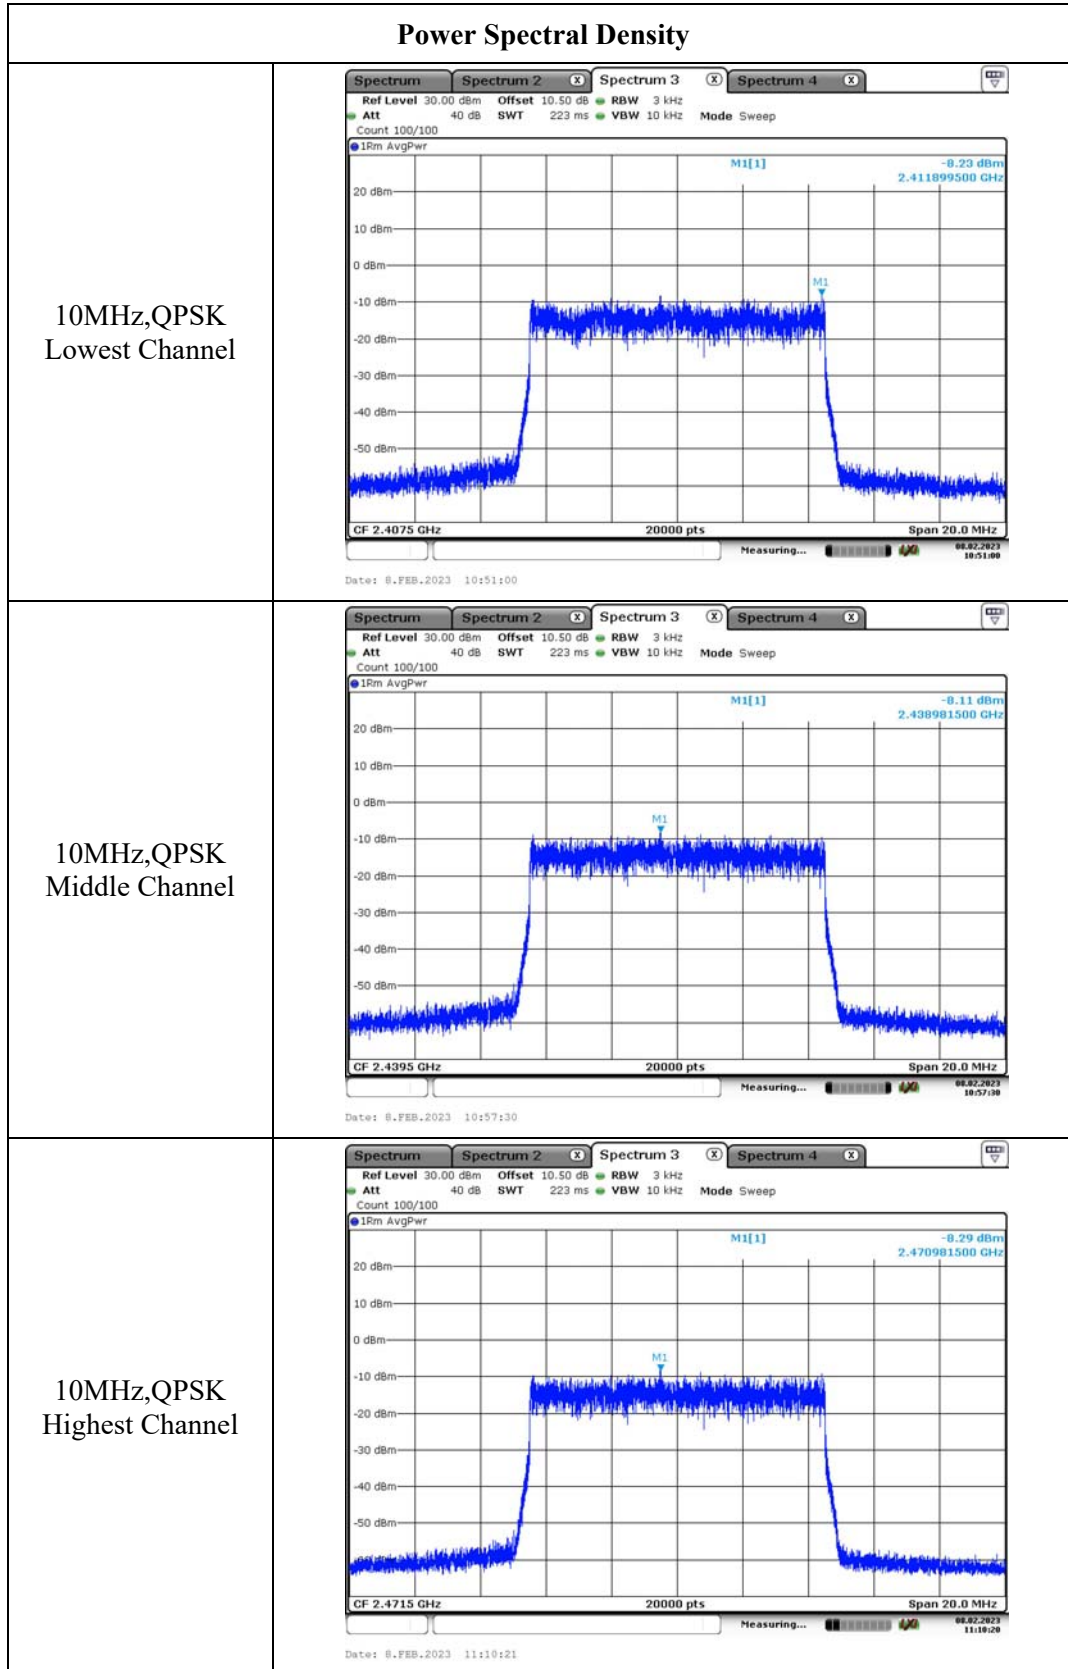




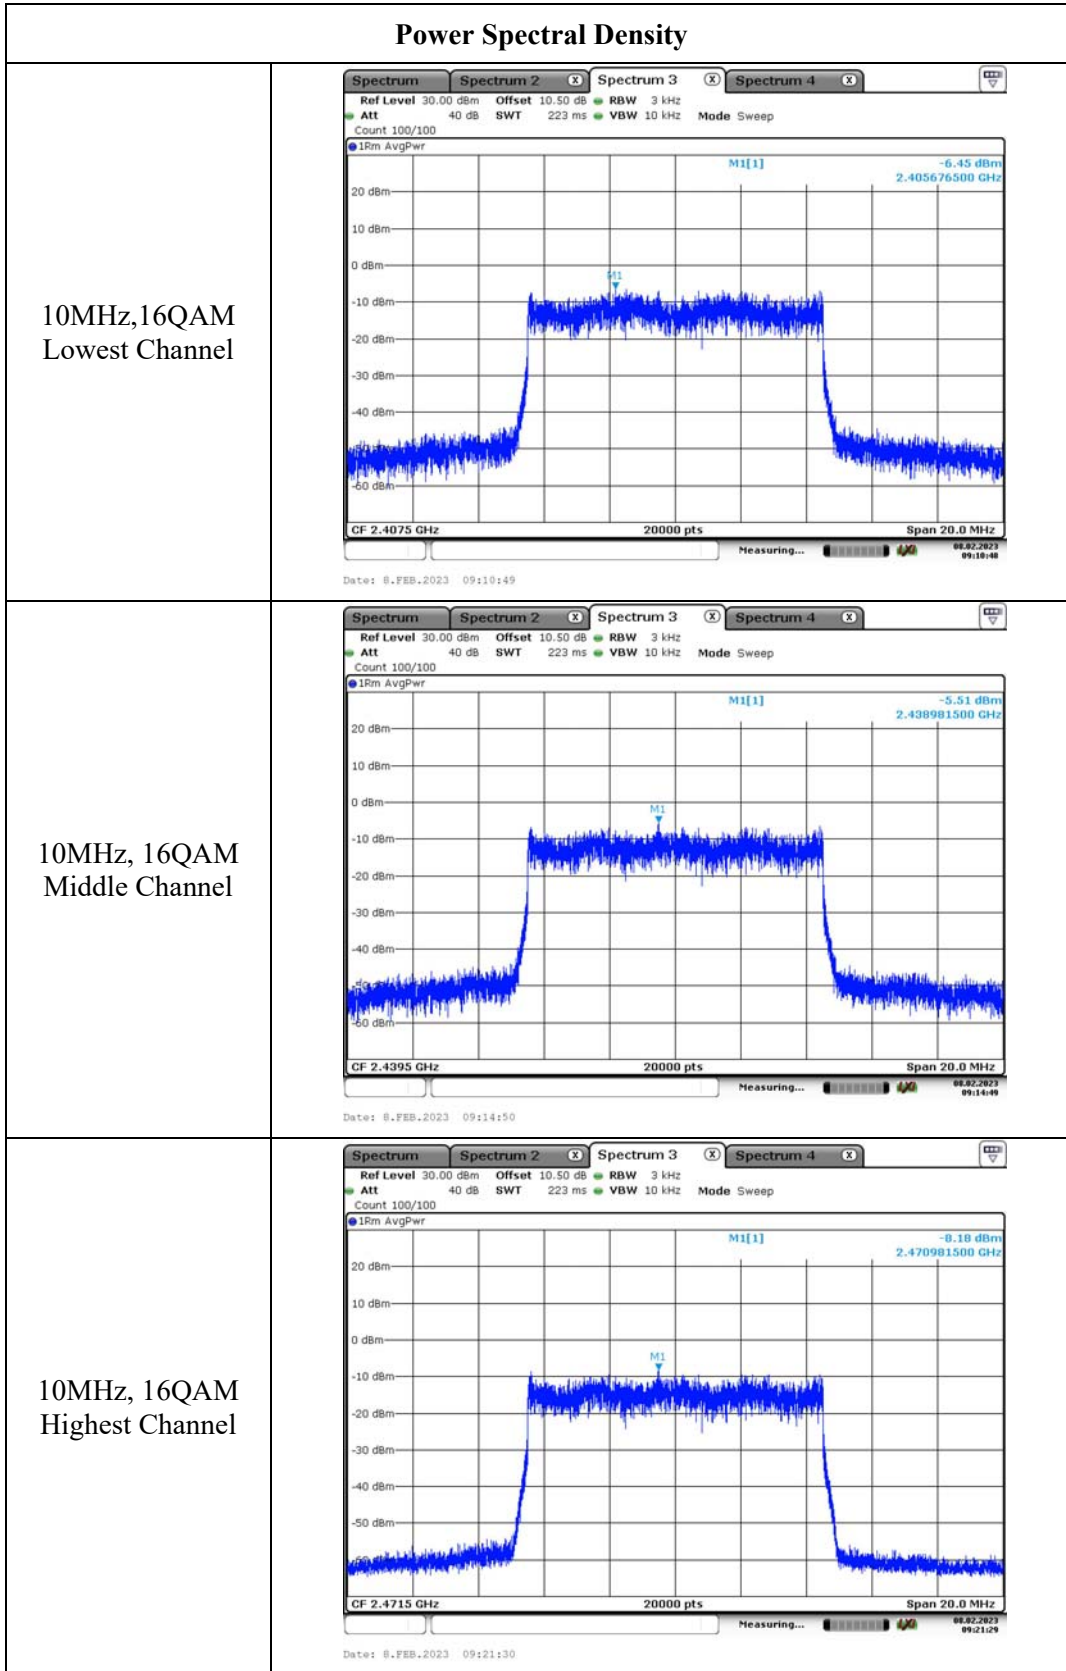

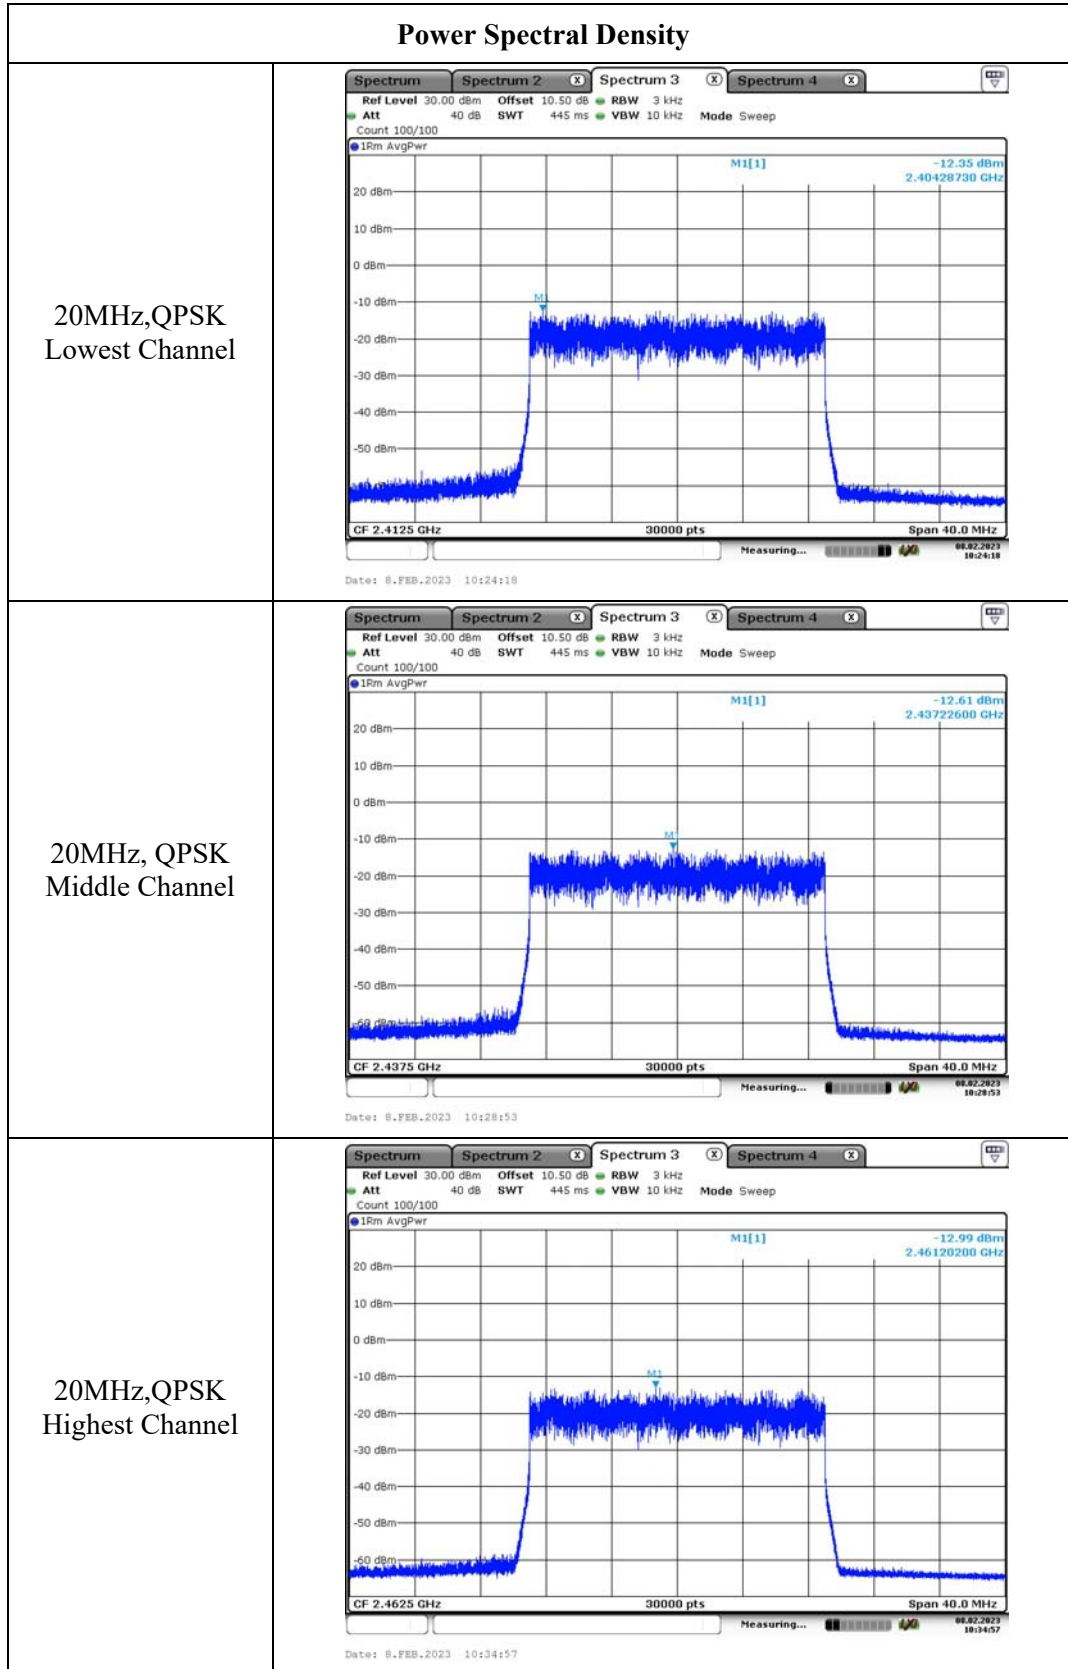


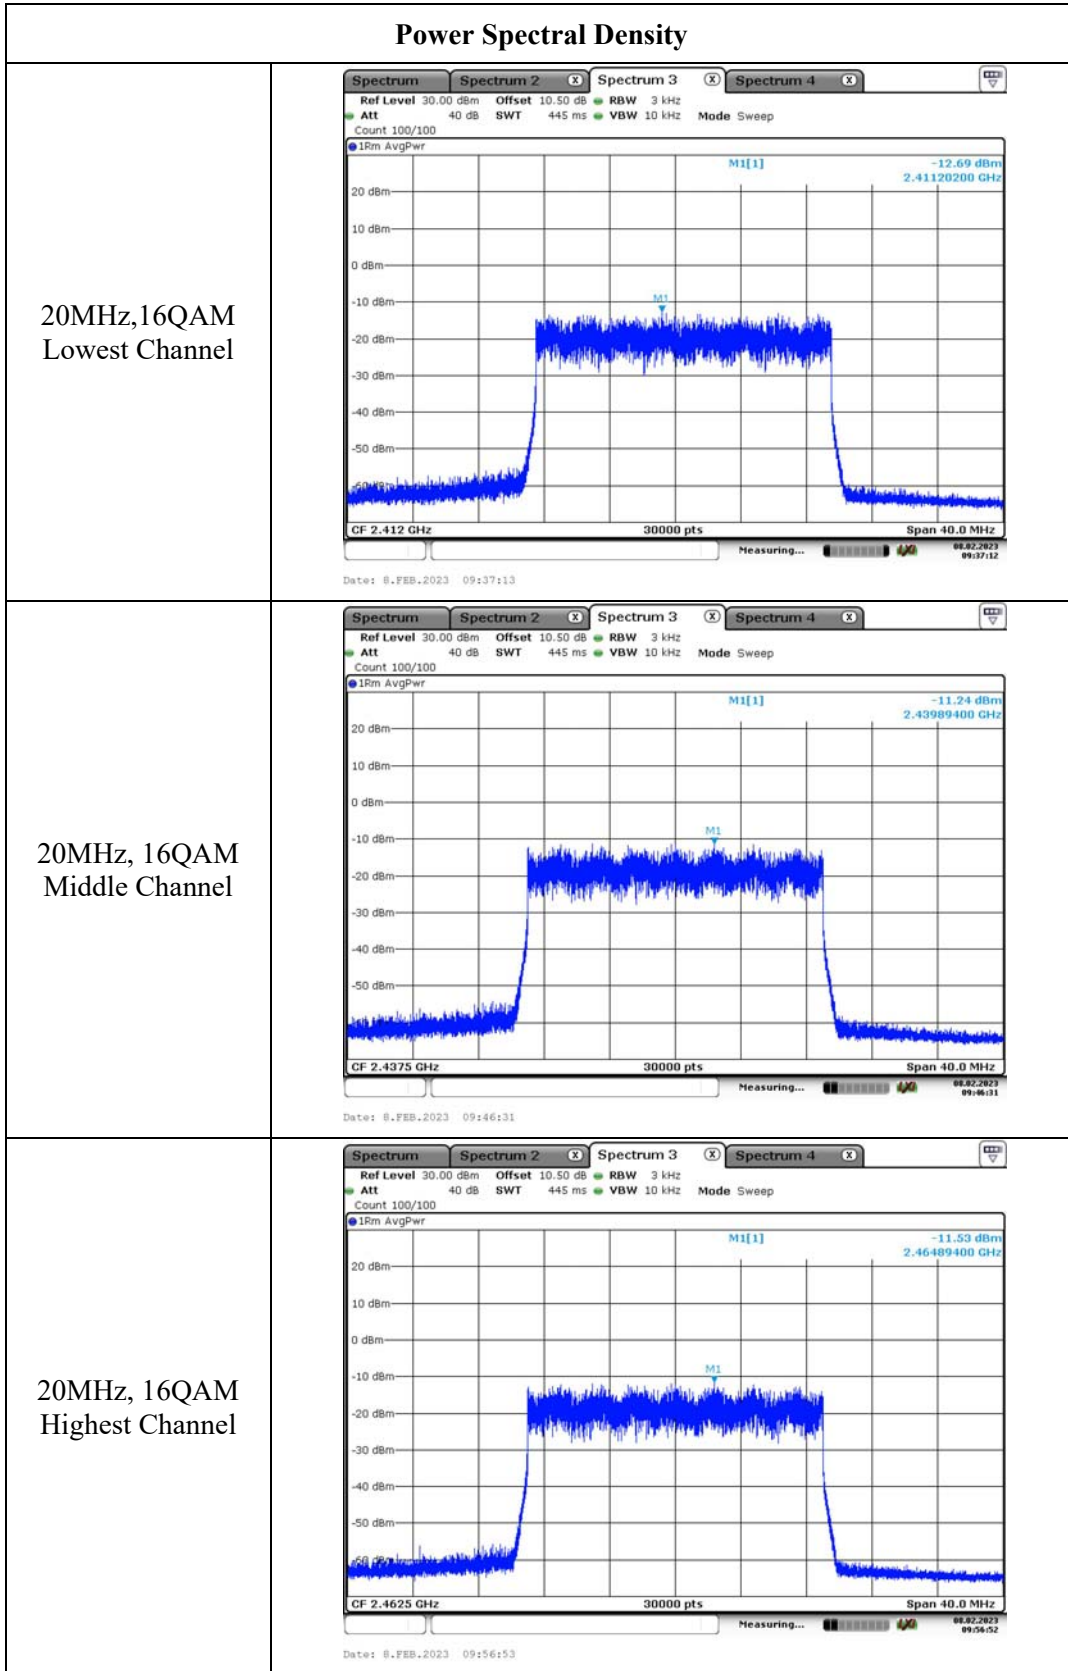

Chain 2:

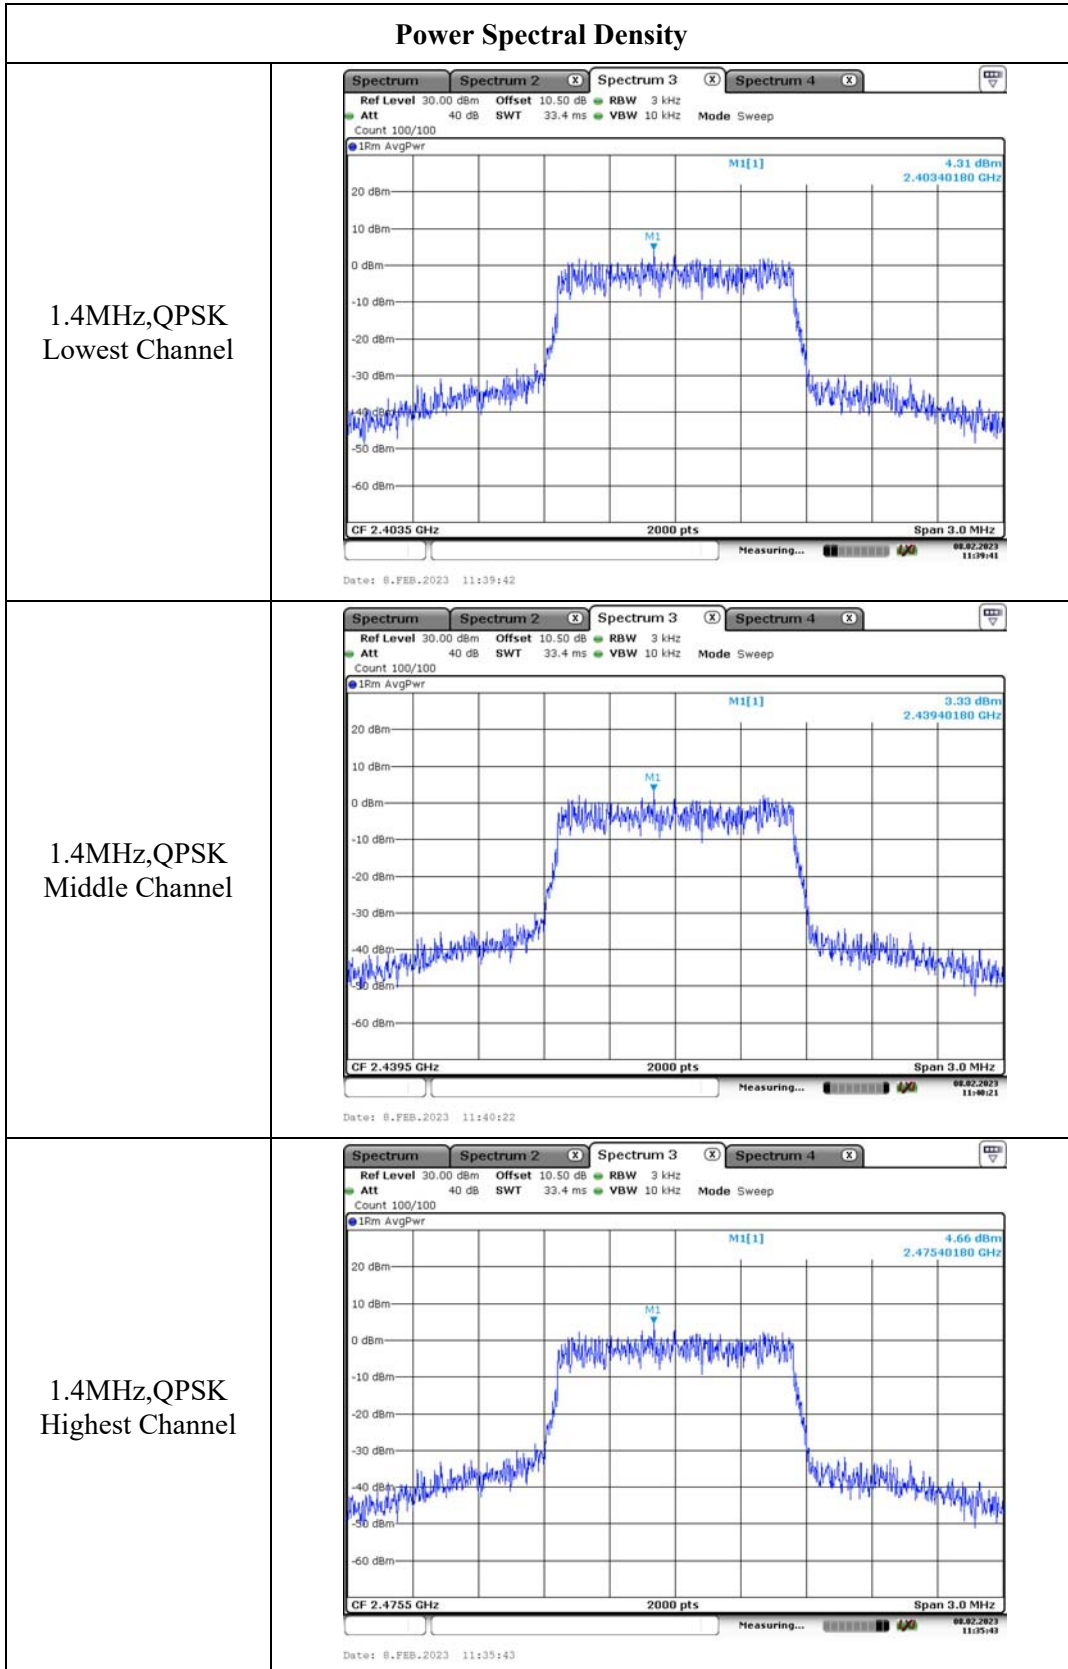


<b>Power Spectral Density</b>	
1.4MHz, 16QAM Lowest Channel	<p>                     Spectrum 2 Spectrum 3 Spectrum 4                      Ref Level 30.00 dBm Offset 10.50 dB RBW 3 kHz                      Att 40 dB SWT 33.4 ms VBW 10 kHz Mode Sweep                      Count 100/100                      IRm AvgPwr                      M1[1] 4.54 dBm 2.40340180 GHz                      CF 2.4035 GHz 2000 pts Span 3.0 MHz                      Date: 7.FEB.2023 17:28:39                 </p>
1.4MHz, 16QAM Middle Channel	<p>                     Spectrum 2 Spectrum 3 Spectrum 4                      Ref Level 30.00 dBm Offset 10.50 dB RBW 3 kHz                      Att 40 dB SWT 33.4 ms VBW 10 kHz Mode Sweep                      Count 100/100                      IRm AvgPwr                      M1[1] 4.66 dBm 2.43940180 GHz                      CF 2.4395 GHz 2000 pts Span 3.0 MHz                      Date: 7.FEB.2023 17:27:48                 </p>
1.4MHz, 16QAM Highest Channel	<p>                     Spectrum 2 Spectrum 3 Spectrum 4                      Ref Level 30.00 dBm Offset 10.50 dB RBW 3 kHz                      Att 40 dB SWT 33.4 ms VBW 10 kHz Mode Sweep                      Count 100/100                      IRm AvgPwr                      M1[1] 4.43 dBm 2.47540180 GHz                      CF 2.4755 GHz 2000 pts Span 3.0 MHz                      Date: 7.FEB.2023 17:26:23                 </p>

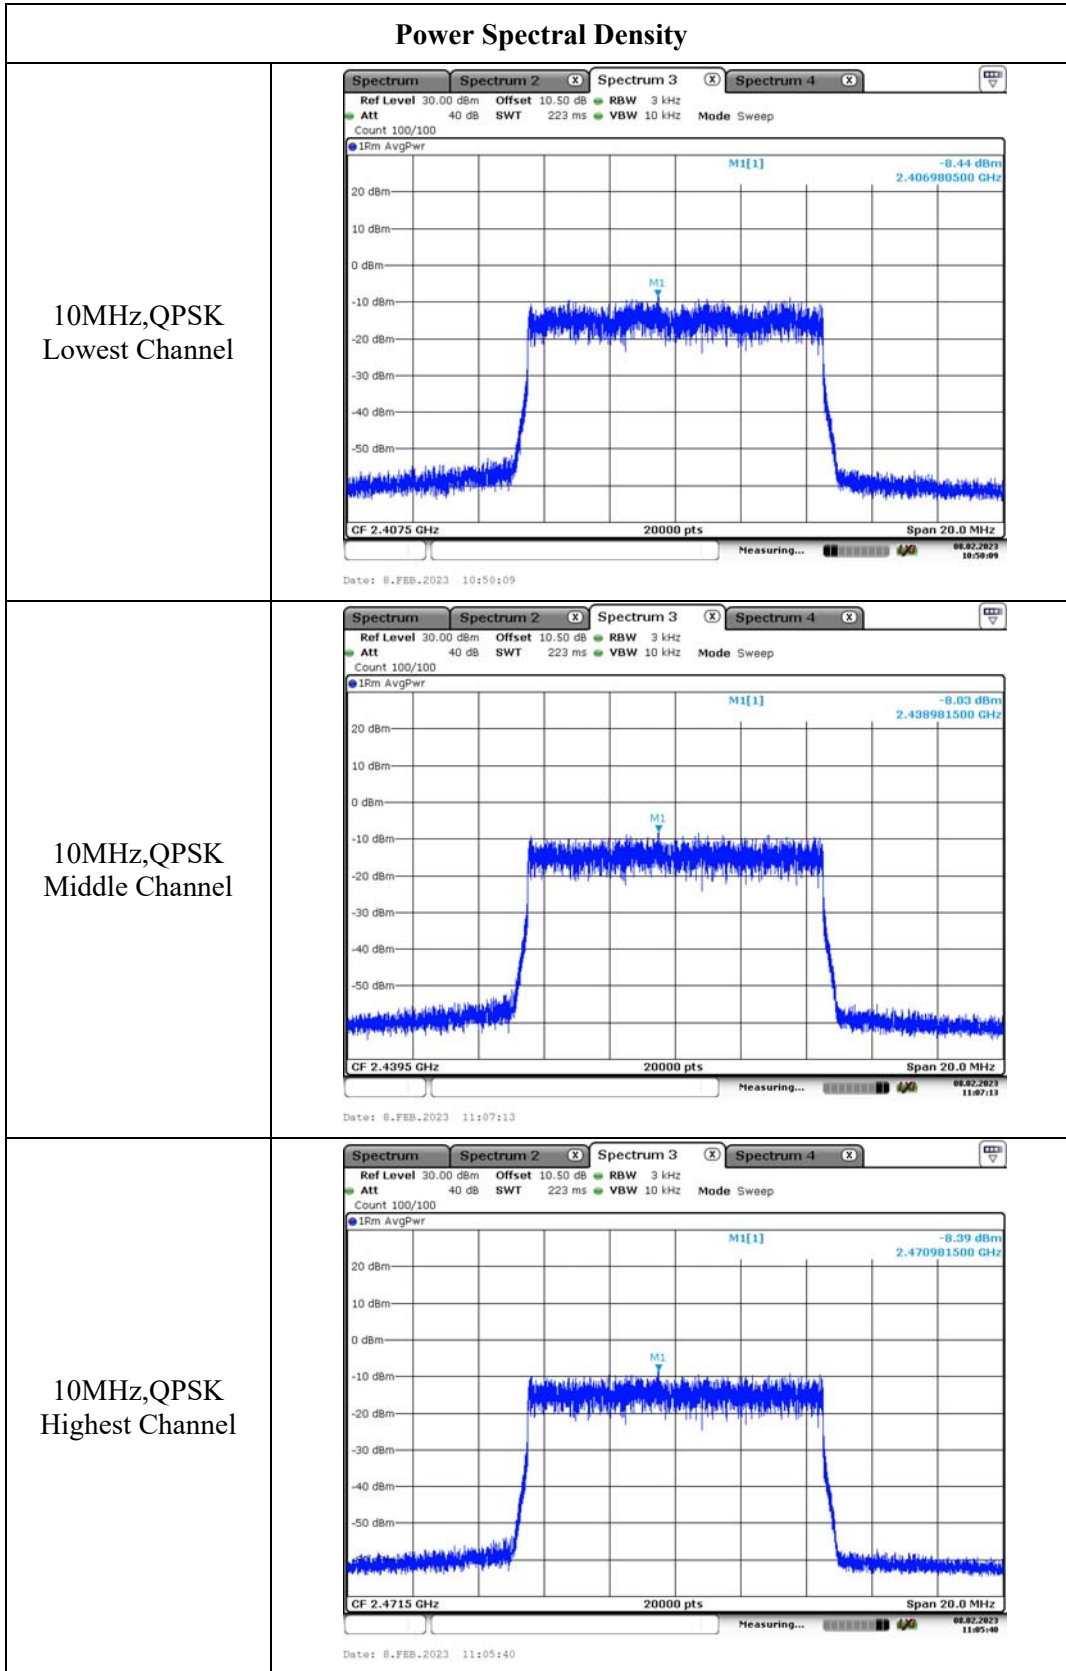




### Power Spectral Density

10MHz, 16QAM  
Lowest Channel

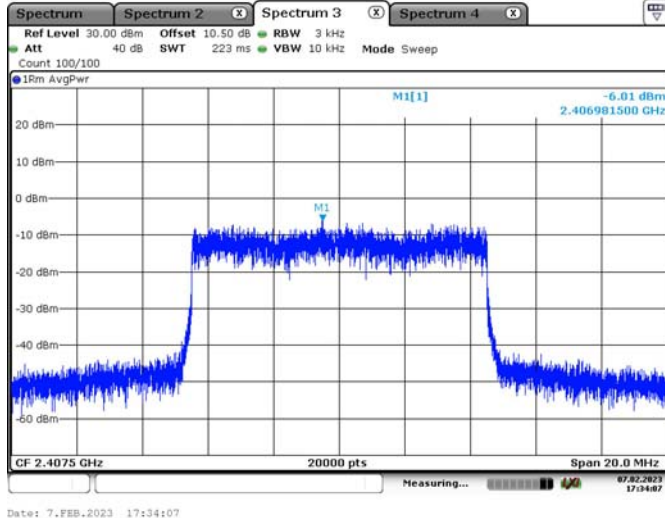

10MHz, 16QAM  
Middle Channel

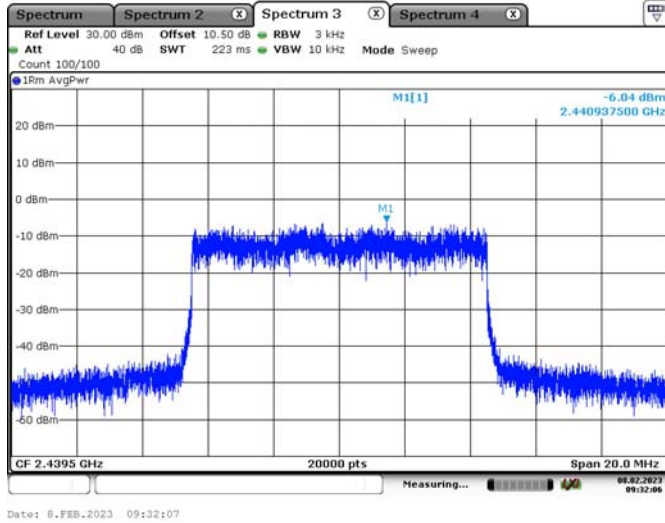

10MHz, 16QAM  
Highest Channel

