


Product Name:	Image transmission Module	Product Model:	M240958S
Test By:	Mike	Test mode:	900MHz-16QAM Tx mode
Test Channel:	Lowest channel	Polarization:	Vertical
Test Voltage:	DC 20V	Environment:	Temp: 24°C Huni: 57%

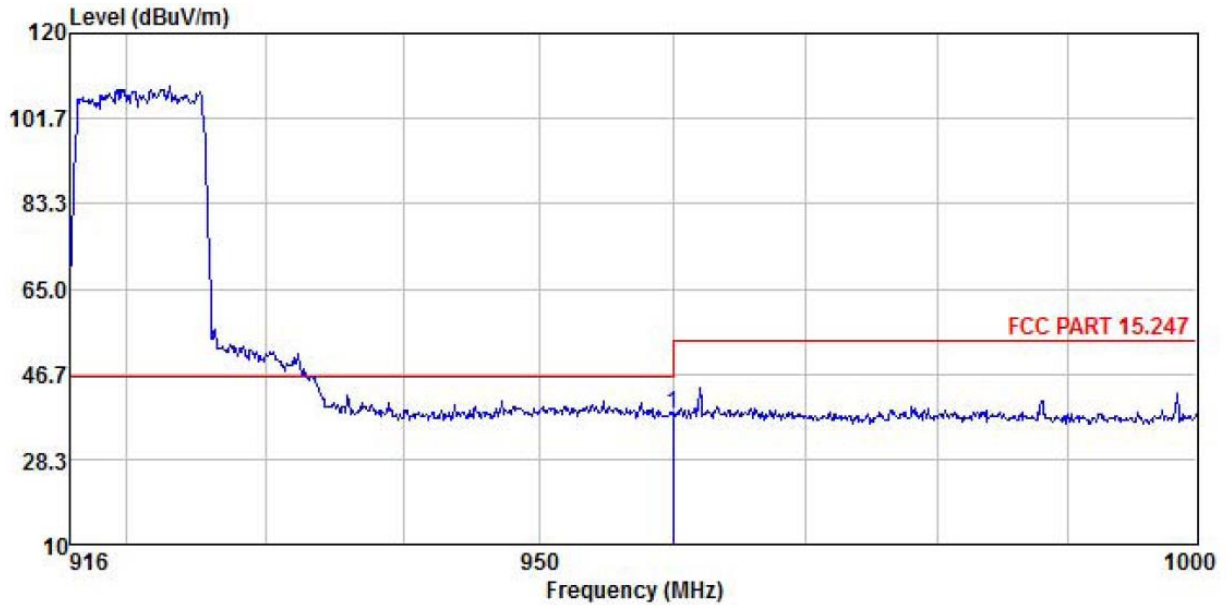


	ReadAntenna	Cable Preamp	Limit	Over				
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	960.023	11.45	22.86	3.51	0.00	37.82	54.00	-16.18

Remark:

1. Final Level = Receiver Read level + Factor(Antenna Factor + Cable Loss – Preamp Factor).
2. The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

Product Name:	Image transmission Module	Product Model:	M240958S
Test By:	Mike	Test mode:	900MHz-16QAM Tx mode
Test Channel:	Highest channel	Polarization:	Horizontal
Test Voltage:	DC 20V	Environment:	Temp: 24°C Huni: 57%

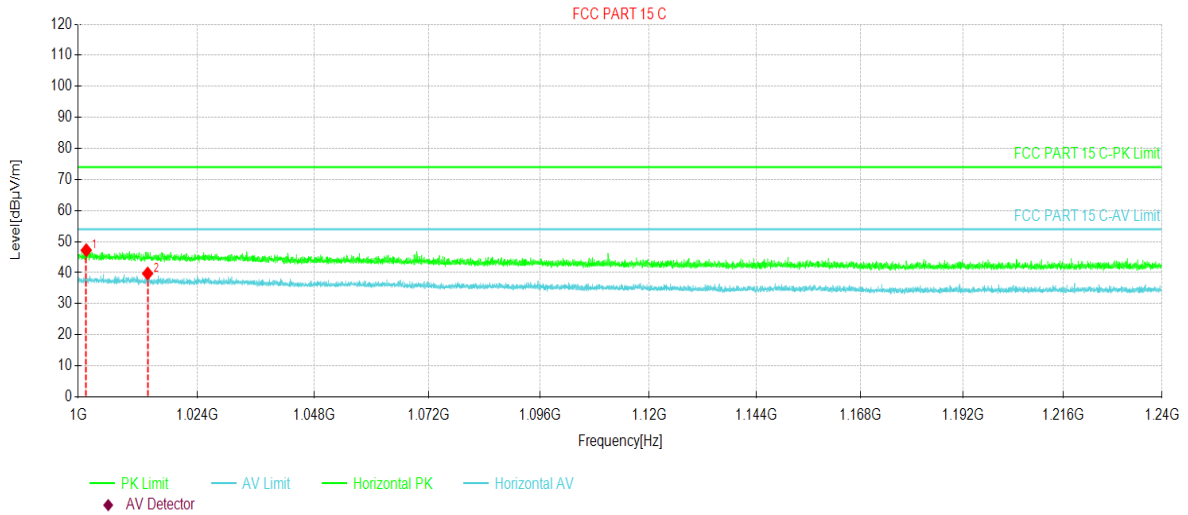


NO.	Freq. [MHz]	Reading [dBuV/m]	Level [dBuV/m]	Factor [dB]	Limit [dBuV/m]	Margin [dB]	Trace	Polarity
1	1001.62	44.12	47.23	3.11	74.00	26.77	PK	Horizontal
2	1013.89	36.81	39.73	2.92	54.00	14.27	AV	Horizontal

Remark:

- Final Level = Receiver Read level + Factor(Antenna Factor + Cable Loss – Preamplifier Factor).
- The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

Product Name:	Image transmission Module	Product Model:	M240958S
Test By:	Mike	Test mode:	900MHz-16QAM Tx mode
Test Channel:	Highest channel	Polarization:	Vertical
Test Voltage:	DC 20V	Environment:	Temp: 24°C Humi: 57%

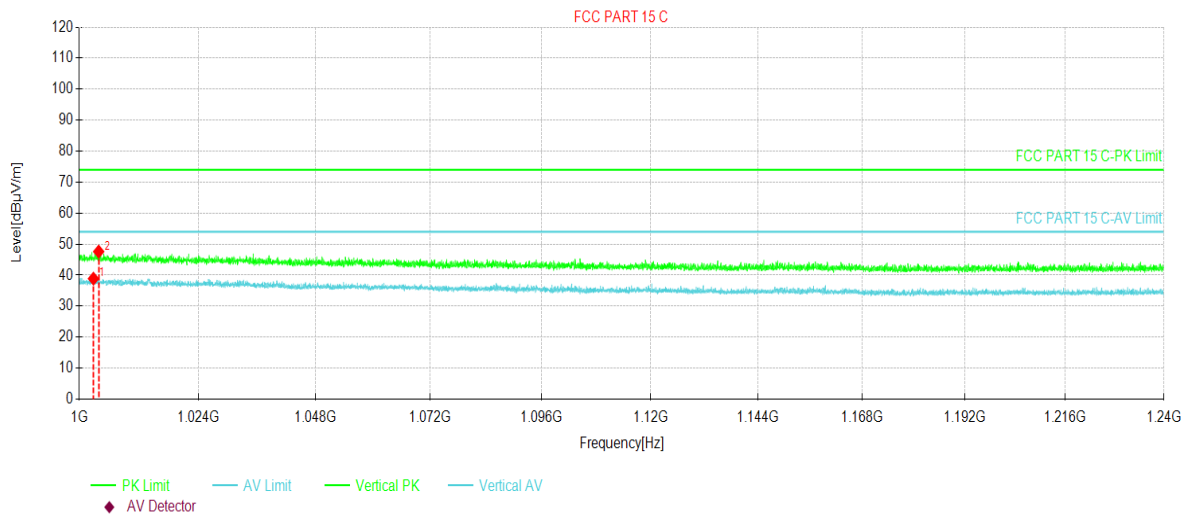


NO.	Freq. [MHz]	Reading [dBµV/m]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Trace	Polarity
1	1002.82	35.76	38.86	3.10	54.00	15.14	AV	Vertical
2	1003.87	44.52	47.60	3.08	74.00	26.40	PK	Vertical

Remark:

- Final Level = Receiver Read level + Factor(Antenna Factor + Cable Loss – Preamplifier Factor).
- The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

Product Name:	Image transmission Module	Product Model:	M240958S
Test By:	Mike	Test mode:	2.4GHz-QPSK Tx mode
Test Channel:	Lowest channel	Polarization:	Horizontal
Test Voltage:	DC 20V	Environment:	Temp: 24°C Huni: 57%

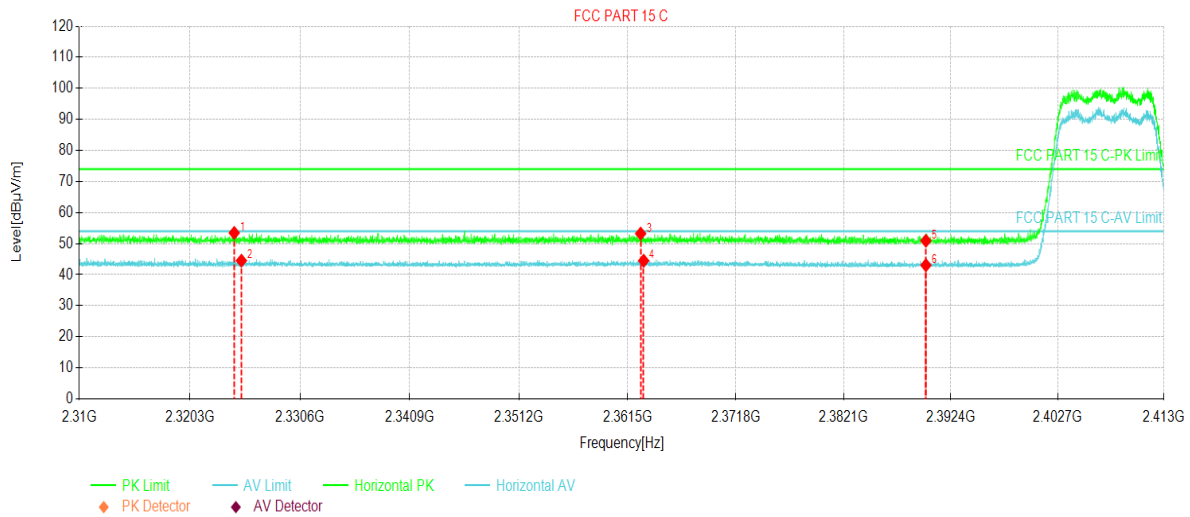


NO.	Freq. [MHz]	Reading [dBµV/m]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Trace	Polarity
1	2324.44	46.60	53.46	6.86	74.00	20.54	PK	Horizontal
2	2325.11	37.66	44.52	6.86	54.00	9.48	AV	Horizontal
3	2362.74	46.24	53.23	6.99	74.00	20.77	PK	Horizontal
4	2363.03	37.50	44.49	6.99	54.00	9.51	AV	Horizontal
5	2390.00	43.84	50.92	7.08	74.00	23.08	PK	Horizontal
6	2390.00	35.97	43.05	7.08	54.00	10.95	AV	Horizontal

Remark:

- Final Level = Receiver Read level + Factor(Antenna Factor + Cable Loss – Preamplifier Factor).
- The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

Product Name:	Image transmission Module	Product Model:	M240958S
Test By:	Mike	Test mode:	2.4GHz-QPSK Tx mode
Test Channel:	Lowest channel	Polarization:	Vertical
Test Voltage:	DC 20V	Environment:	Temp: 24°C Huni: 57%

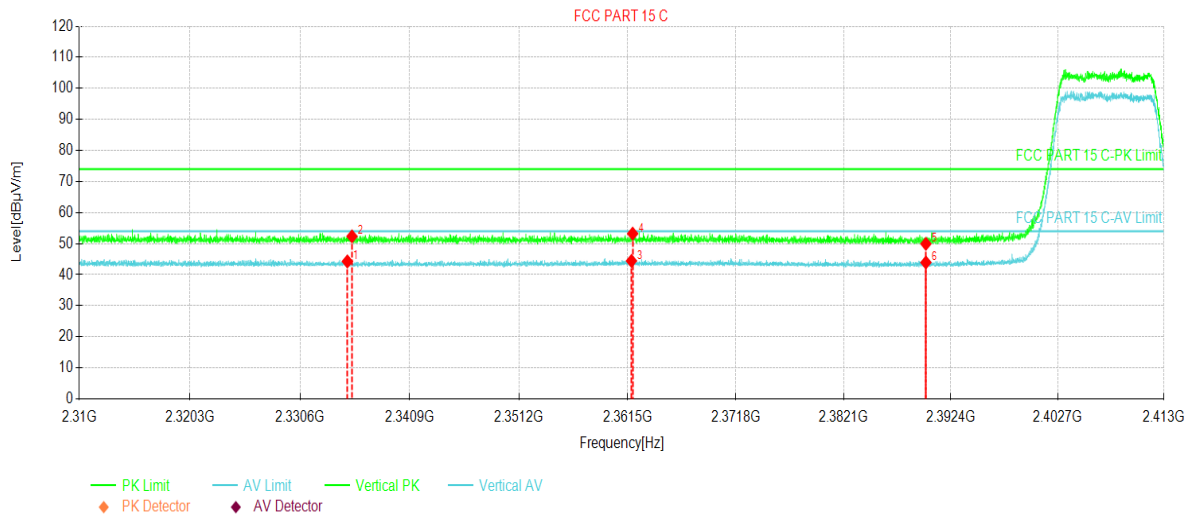


NO.	Freq. [MHz]	Reading [dBµV/m]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Trace	Polarity
1	2335.04	37.36	44.26	6.90	54.00	9.74	AV	Vertical
2	2335.47	45.44	52.34	6.90	74.00	21.66	PK	Vertical
3	2361.87	37.46	44.44	6.98	54.00	9.56	AV	Vertical
4	2361.98	46.23	53.21	6.98	74.00	20.79	PK	Vertical
5	2390.00	42.84	49.92	7.08	74.00	24.08	PK	Vertical
6	2390.00	36.84	43.92	7.08	54.00	10.08	AV	Vertical

Remark:

- Final Level = Receiver Read level + Factor(Antenna Factor + Cable Loss – Preamplifier Factor).
- The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

Product Name:	Image transmission Module	Product Model:	M240958S
Test By:	Mike	Test mode:	2.4GHz-QPSK Tx mode
Test Channel:	Highest channel	Polarization:	Horizontal
Test Voltage:	DC 20V	Environment:	Temp: 24°C Huni: 57%

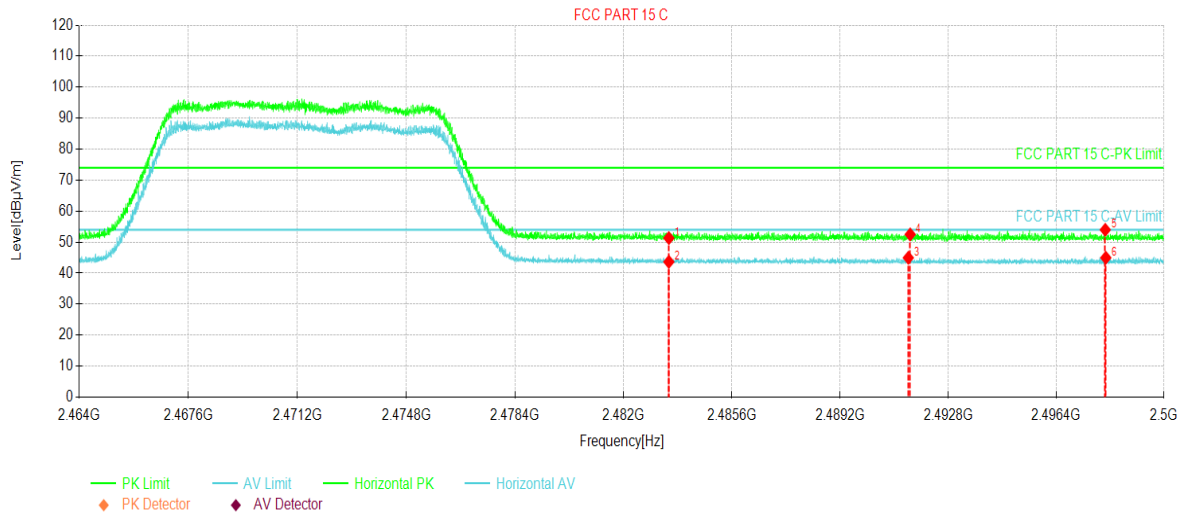


NO.	Freq. [MHz]	Reading [dBuV/m]	Level [dBuV/m]	Factor [dB]	Limit [dBuV/m]	Margin [dB]	Trace	Polarity
1	2483.50	43.63	51.32	7.69	74.00	22.68	PK	Horizontal
2	2483.50	35.96	43.65	7.69	54.00	10.35	AV	Horizontal
3	2491.46	37.22	44.96	7.74	54.00	9.04	AV	Horizontal
4	2491.53	44.75	52.49	7.74	74.00	21.51	PK	Horizontal
5	2498.03	46.18	53.97	7.79	74.00	20.03	PK	Horizontal
6	2498.05	37.18	44.97	7.79	54.00	9.03	AV	Horizontal

Remark:

- Final Level = Receiver Read level + Factor(Antenna Factor + Cable Loss – Pre-amplifier Factor).
- The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

Product Name:	Image transmission Module	Product Model:	M240958S
Test By:	Mike	Test mode:	2.4GHz-QPSK Tx mode
Test Channel:	Highest channel	Polarization:	Vertical
Test Voltage:	DC 20V	Environment:	Temp: 24°C Huni: 57%

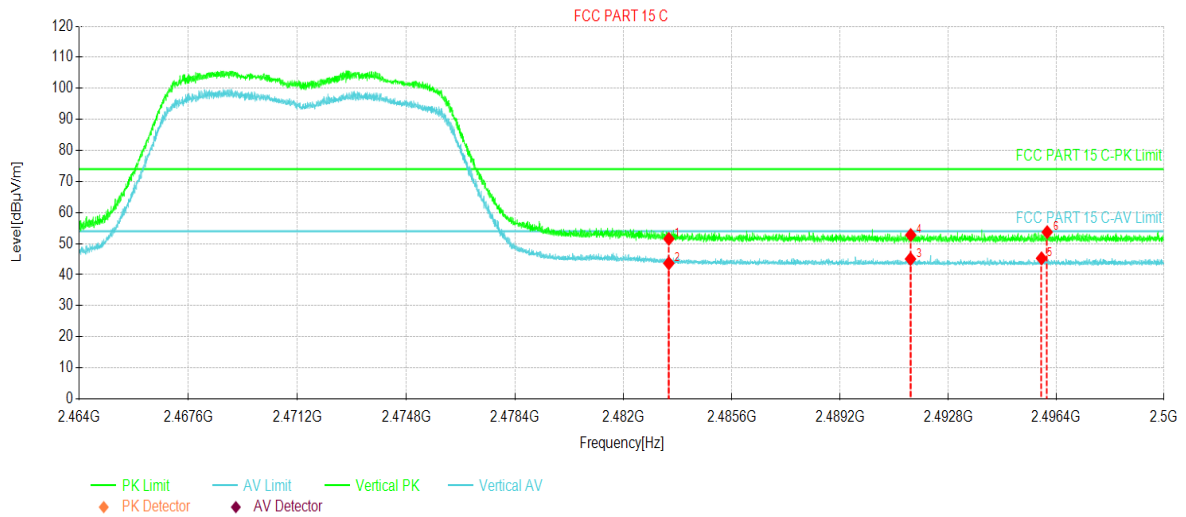


NO.	Freq. [MHz]	Reading [dBµV/m]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Trace	Polarity
1	2483.50	43.84	51.53	7.69	74.00	22.47	PK	Vertical
2	2483.50	35.97	43.66	7.69	54.00	10.34	AV	Vertical
3	2491.54	37.31	45.05	7.74	54.00	8.95	AV	Vertical
4	2491.54	45.04	52.78	7.74	74.00	21.22	PK	Vertical
5	2495.90	37.49	45.26	7.77	54.00	8.74	AV	Vertical
6	2496.09	45.93	53.70	7.77	74.00	20.30	PK	Vertical

Remark:

- Final Level = Receiver Read level + Factor(Antenna Factor + Cable Loss – Preamplifier Factor).
- The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

Product Name:	Image transmission Module	Product Model:	M240958S
Test By:	Mike	Test mode:	2.4GHz-16QAM Tx mode
Test Channel:	Lowest channel	Polarization:	Horizontal
Test Voltage:	DC 20V	Environment:	Temp: 24°C Huni: 57%

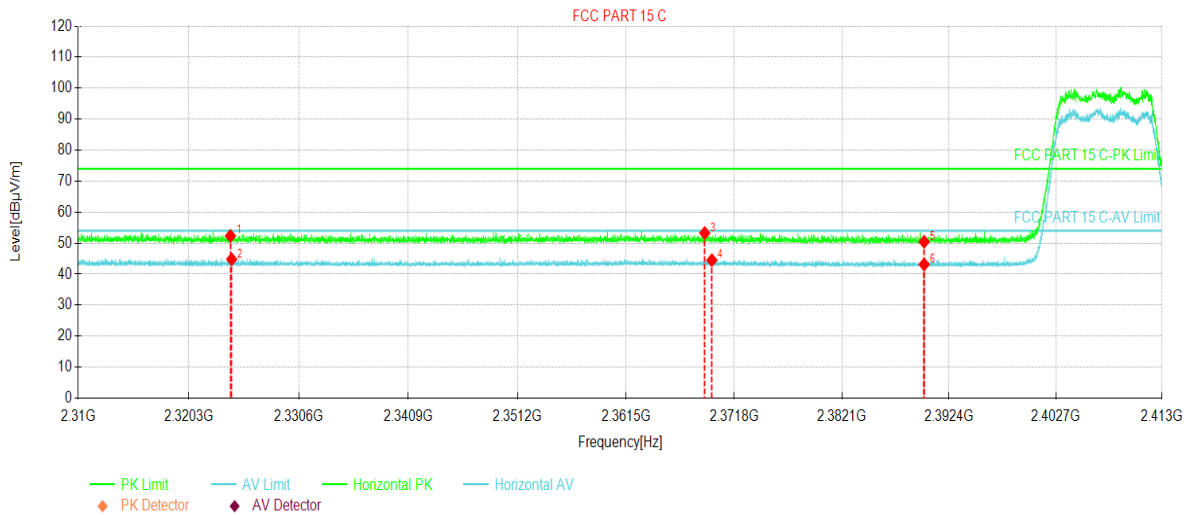


NO.	Freq. [MHz]	Reading [dBuV/m]	Level [dBuV/m]	Factor [dB]	Limit [dBuV/m]	Margin [dB]	Trace	Polarity
1	2324.20	45.47	52.33	6.86	74.00	21.67	PK	Horizontal
2	2324.31	37.93	44.79	6.86	54.00	9.21	AV	Horizontal
3	2368.99	46.25	53.26	7.01	74.00	20.74	PK	Horizontal
4	2369.67	37.48	44.49	7.01	54.00	9.51	AV	Horizontal
5	2390.00	43.36	50.44	7.08	74.00	23.56	PK	Horizontal
6	2390.00	36.05	43.13	7.08	54.00	10.87	AV	Horizontal

Remark:

- Final Level = Receiver Read level + Factor(Antenna Factor + Cable Loss – Pre-amplifier Factor).
- The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

Product Name:	Image transmission Module	Product Model:	M240958S
Test By:	Mike	Test mode:	2.4GHz-16QAM Tx mode
Test Channel:	Lowest channel	Polarization:	Vertical
Test Voltage:	DC 20V	Environment:	Temp: 24°C Huni: 57%

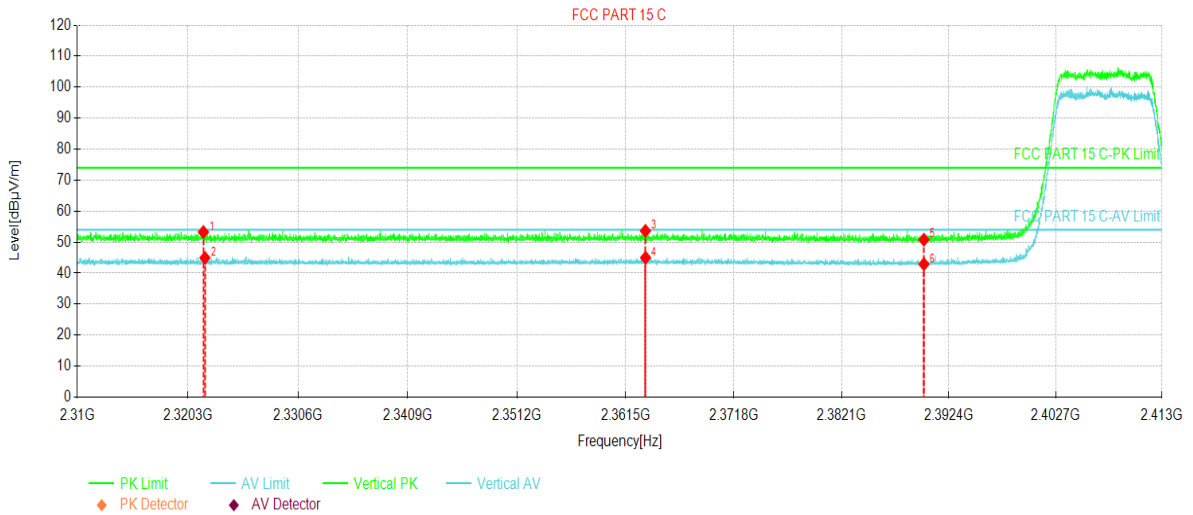


NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Trace	Polarity
1	2321.75	46.40	53.25	6.85	74.00	20.75	PK	Vertical
2	2321.89	38.08	44.93	6.85	54.00	9.07	AV	Vertical
3	2363.39	46.64	53.63	6.99	74.00	20.37	PK	Vertical
4	2363.40	38.01	45.00	6.99	54.00	9.00	AV	Vertical
5	2390.00	43.71	50.79	7.08	74.00	23.21	PK	Vertical
6	2390.00	35.81	42.89	7.08	54.00	11.11	AV	Vertical

Remark:

- Final Level = Receiver Read level + Factor(Antenna Factor + Cable Loss – Preamplifier Factor).
- The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

Product Name:	Image transmission Module	Product Model:	M240958S
Test By:	Mike	Test mode:	2.4GHz-16QAM Tx mode
Test Channel:	Highest channel	Polarization:	Horizontal
Test Voltage:	DC 20V	Environment:	Temp: 24°C Huni: 57%

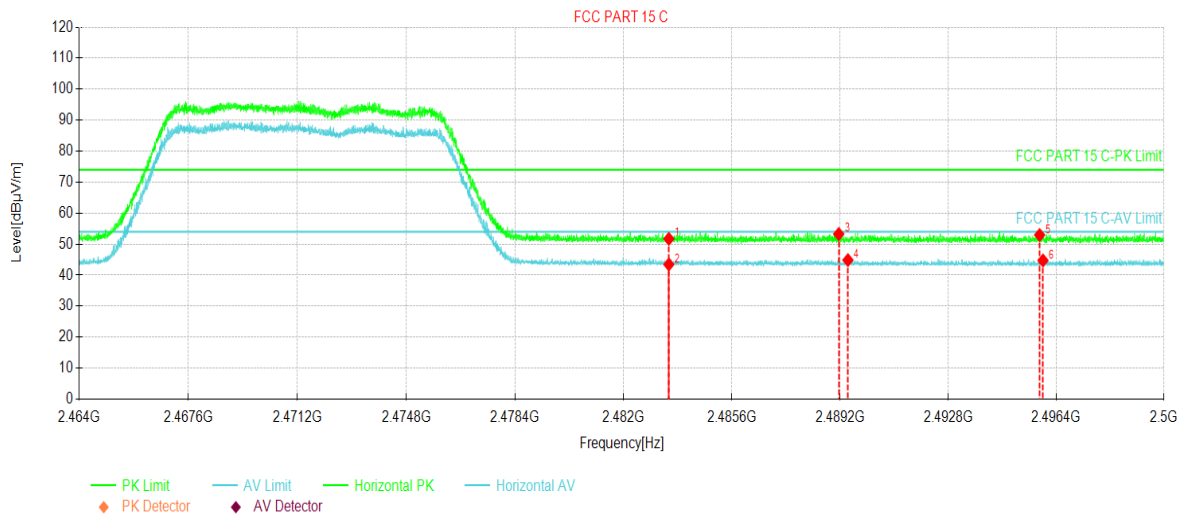


NO.	Freq. [MHz]	Reading [dBuV/m]	Level [dBuV/m]	Factor [dB]	Limit [dBuV/m]	Margin [dB]	Trace	Polarity
1	2483.50	44.02	51.71	7.69	74.00	22.29	PK	Horizontal
2	2483.50	35.77	43.46	7.69	54.00	10.54	AV	Horizontal
3	2489.15	45.55	53.28	7.73	74.00	20.72	PK	Horizontal
4	2489.45	37.12	44.85	7.73	54.00	9.15	AV	Horizontal
5	2495.84	45.17	52.94	7.77	74.00	21.06	PK	Horizontal
6	2495.95	36.97	44.74	7.77	54.00	9.26	AV	Horizontal

Remark:

- Final Level = Receiver Read level + Factor(Antenna Factor + Cable Loss – Preamplifier Factor).
- The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

Product Name:	Image transmission Module	Product Model:	M240958S
Test By:	Mike	Test mode:	2.4GHz-16QAM Tx mode
Test Channel:	Highest channel	Polarization:	Vertical
Test Voltage:	DC 20V	Environment:	Temp: 24°C Huni: 57%

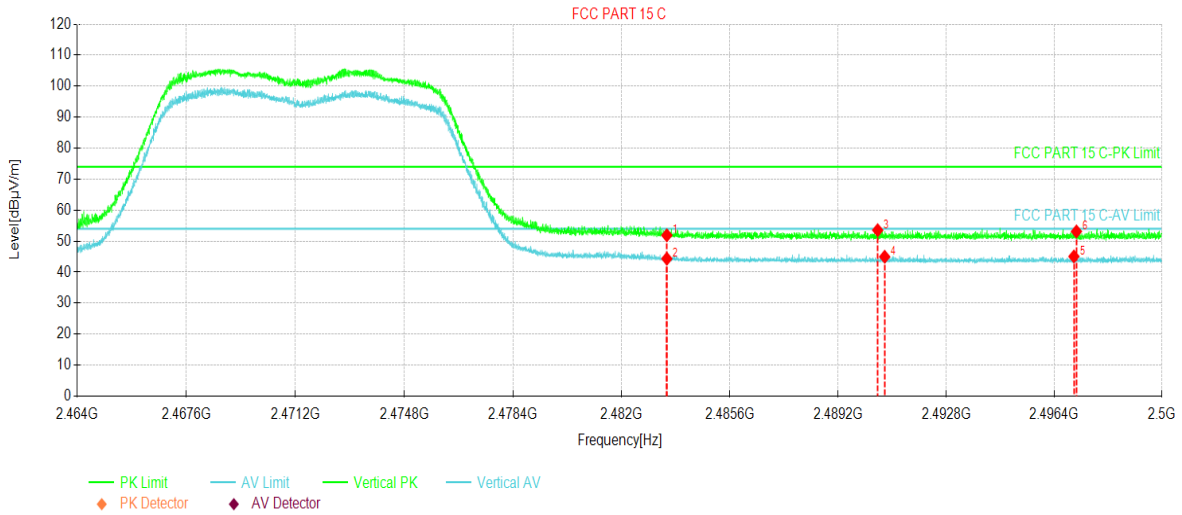


NO.	Freq. [MHz]	Reading [dBuV/m]	Level [dBuV/m]	Factor [dB]	Limit [dBuV/m]	Margin [dB]	Trace	Polarity
1	2483.50	44.20	51.89	7.69	74.00	22.11	PK	Vertical
2	2483.50	36.64	44.33	7.69	54.00	9.67	AV	Vertical
3	2490.51	45.81	53.54	7.73	74.00	20.46	PK	Vertical
4	2490.74	37.23	44.97	7.74	54.00	9.03	AV	Vertical
5	2497.05	37.28	45.06	7.78	54.00	8.94	AV	Vertical
6	2497.14	45.35	53.13	7.78	74.00	20.87	PK	Vertical

Remark:

- Final Level = Receiver Read level + Factor(Antenna Factor + Cable Loss – Pre-amplifier Factor).
- The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

BW: 20MHz

Product Name:	Image transmission Module	Product Model:	M240958S
Test By:	Mike	Test mode:	900MHz-QPSK Tx mode
Test Channel:	Lowest channel	Polarization:	Horizontal
Test Voltage:	DC 20V	Environment:	Temp: 24°C Humi: 57%

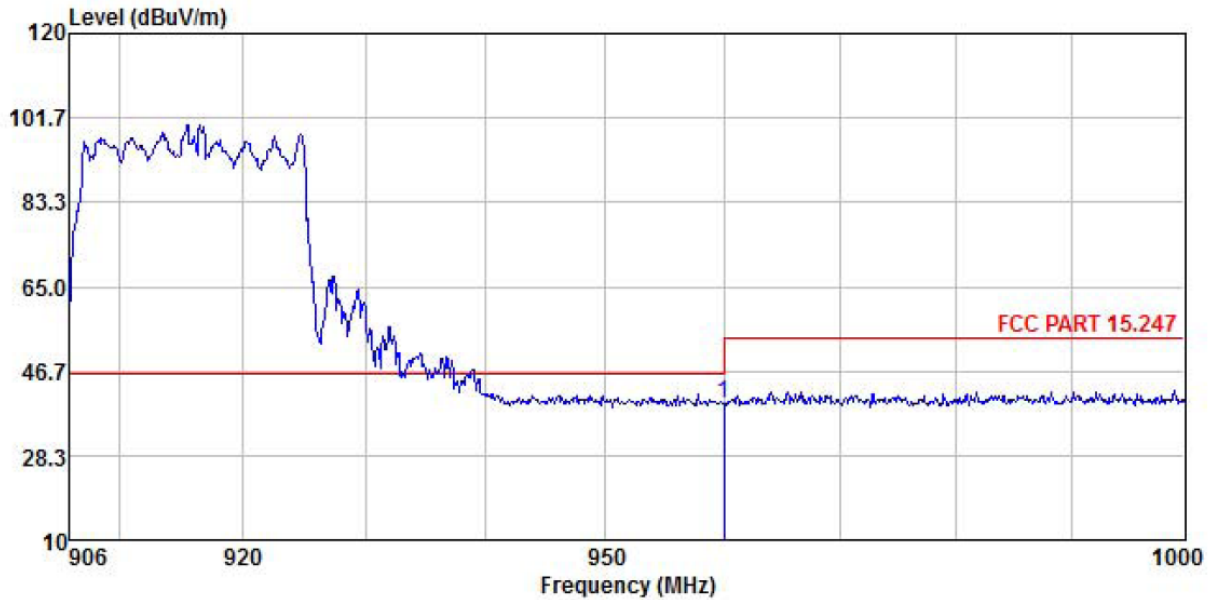


	ReadAntenna	Cable Preamp	Limit	Over				
Freq	Level	Factor	Loss	Factor	Level			
MHz	dBuV	dB/m	dB	dB	dBuV/m			
1	960.050	13.34	22.86	3.51	0.00	39.71	54.00	-14.29

Remark:

- Final Level = Receiver Read level + Factor(Antenna Factor + Cable Loss – Pre-amplifier Factor).
- The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

Product Name:	Image transmission Module	Product Model:	M240958S
Test By:	Mike	Test mode:	900MHz-QPSK Tx mode
Test Channel:	Lowest channel	Polarization:	Vertical
Test Voltage:	DC 20V	Environment:	Temp: 24°C Huni: 57%

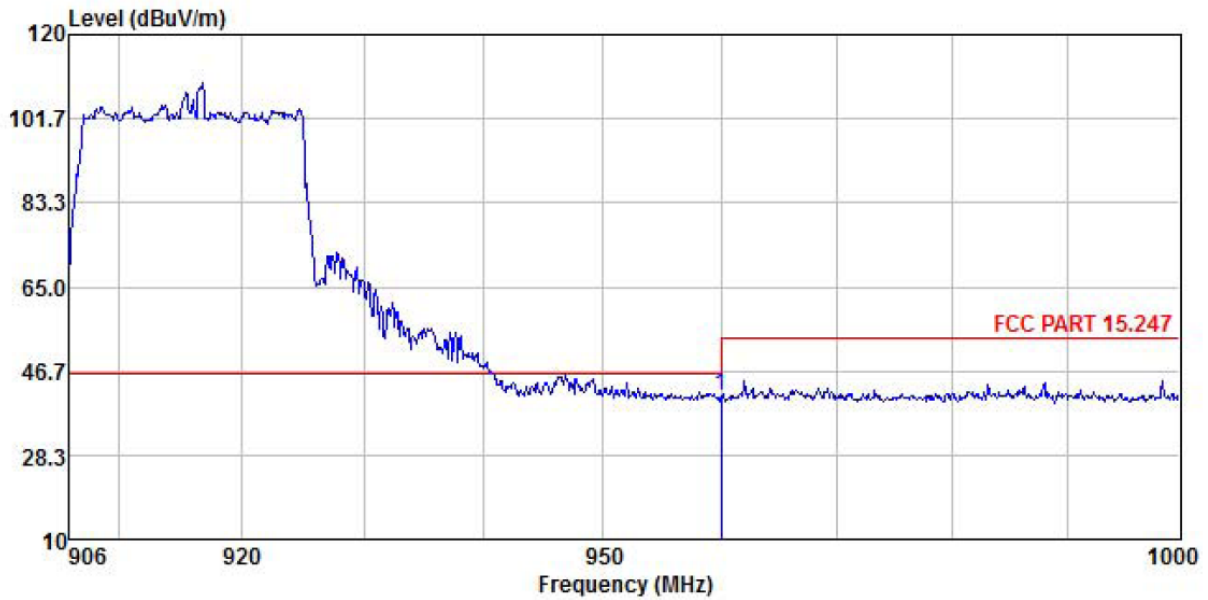


	Read	Antenna	Cable	Preamp	Limit	Over	
Freq	Level	Factor	Loss	Factor	Line	Limit	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1	960.050	14.78	22.86	3.51	0.00	41.15	54.00 -12.85

Remark:

1. Final Level = Receiver Read level + Factor(Antenna Factor + Cable Loss – Preamplifier Factor).
2. The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

Product Name:	Image transmission Module	Product Model:	M240958S
Test By:	Mike	Test mode:	900MHz-QPSK Tx mode
Test Channel:	Highest channel	Polarization:	Horizontal
Test Voltage:	DC 20V	Environment:	Temp: 24°C Huni: 57%

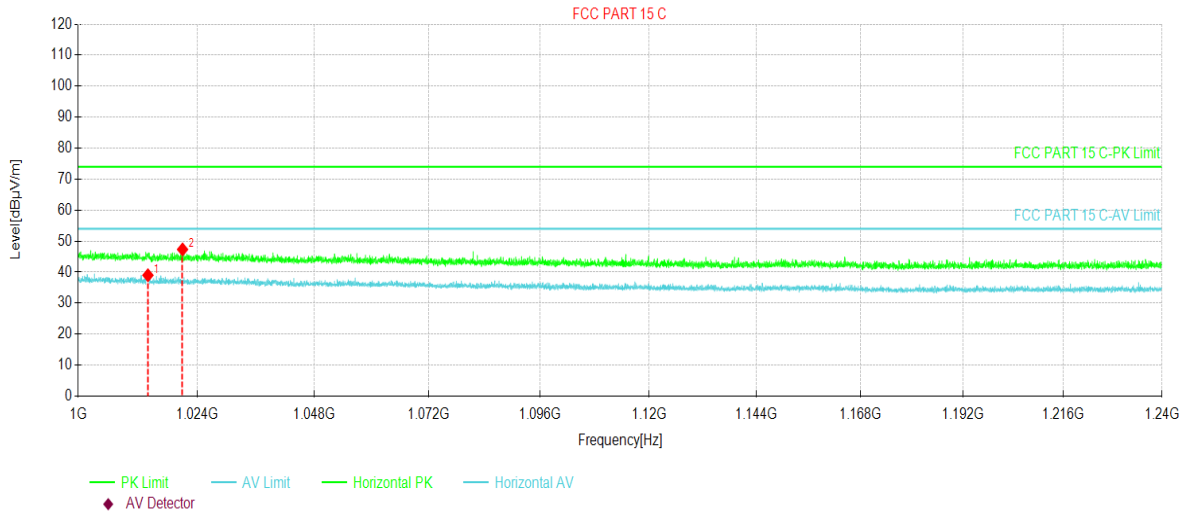


NO.	Freq. [MHz]	Reading [dBµV/m]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Trace	Polarity
1	1013.95	36.08	39.00	2.92	54.00	15.00	AV	Horizontal
2	1020.94	44.52	47.33	2.81	74.00	26.67	PK	Horizontal

Remark:

- Final Level = Receiver Read level + Factor(Antenna Factor + Cable Loss – Preamplifier Factor).
- The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

Product Name:	Image transmission Module	Product Model:	M240958S
Test By:	Mike	Test mode:	900MHz-QPSK Tx mode
Test Channel:	Highest channel	Polarization:	Vertical
Test Voltage:	DC 20V	Environment:	Temp: 24°C Huni: 57%

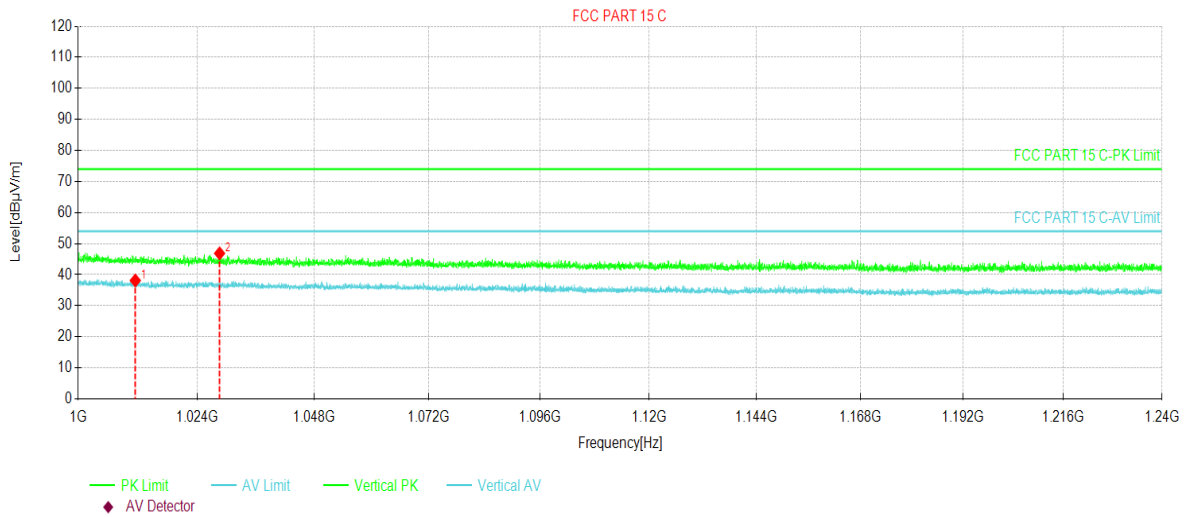


NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Trace	Polarity
1	1011.40	35.17	38.13	2.96	54.00	15.87	AV	Vertical
2	1028.47	44.16	46.85	2.69	74.00	27.15	PK	Vertical

Remark:

- Final Level = Receiver Read level + Factor(Antenna Factor + Cable Loss – Pre-amplifier Factor).
- The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

Product Name:	Image transmission Module	Product Model:	M240958S
Test By:	Mike	Test mode:	900MHz-16QAM Tx mode
Test Channel:	Lowest channel	Polarization:	Horizontal
Test Voltage:	DC 20V	Environment:	Temp: 24°C Humi: 57%

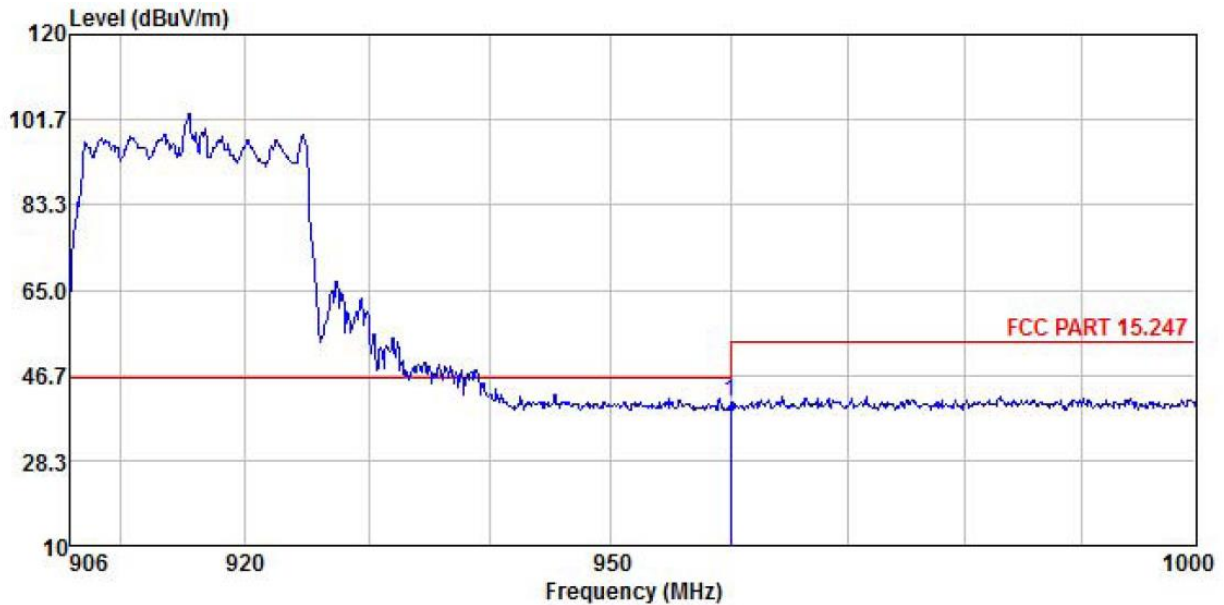


	ReadAntenna	Cable Preamp	Limit	Over					
Freq	Level	Factor	Loss	Factor	Level				
MHz	dBuV	dB/m	dB	dB	dBuV/m				
1	960.050	14.44	22.86	3.51	0.00	40.81	54.00	-13.19	

Remark:

1. Final Level = Receiver Read level + Factor(Antenna Factor + Cable Loss – Preamplifier Factor).
2. The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

Product Name:	Image transmission Module	Product Model:	M240958S
Test By:	Mike	Test mode:	900MHz-16QAM Tx mode
Test Channel:	Lowest channel	Polarization:	Vertical
Test Voltage:	DC 20V	Environment:	Temp: 24°C Huni: 57%

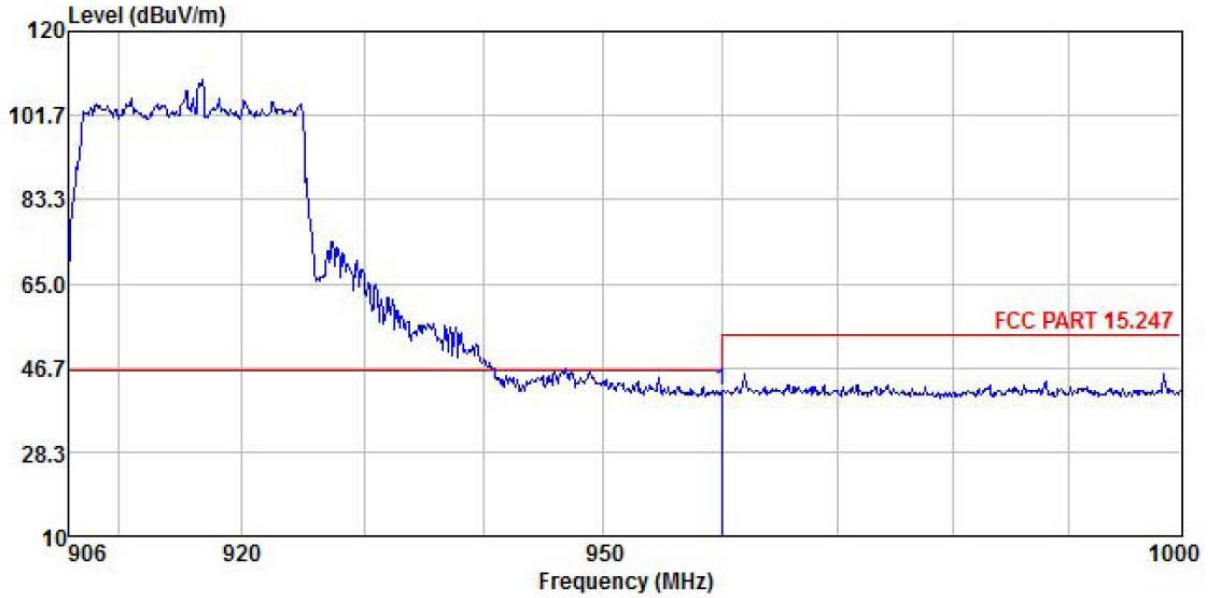


	Read	Antenna	Cable	Preamp	Limit	Over		
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	960.050	15.11	22.86	3.51	0.00	41.48	54.00	-12.52

Remark:

- Final Level = Receiver Read level + Factor(Antenna Factor + Cable Loss – Preamplifier Factor).
- The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

Product Name:	Image transmission Module	Product Model:	M240958S
Test By:	Mike	Test mode:	900MHz-16QAM Tx mode
Test Channel:	Highest channel	Polarization:	Horizontal
Test Voltage:	DC 20V	Environment:	Temp: 24°C Huni: 57%

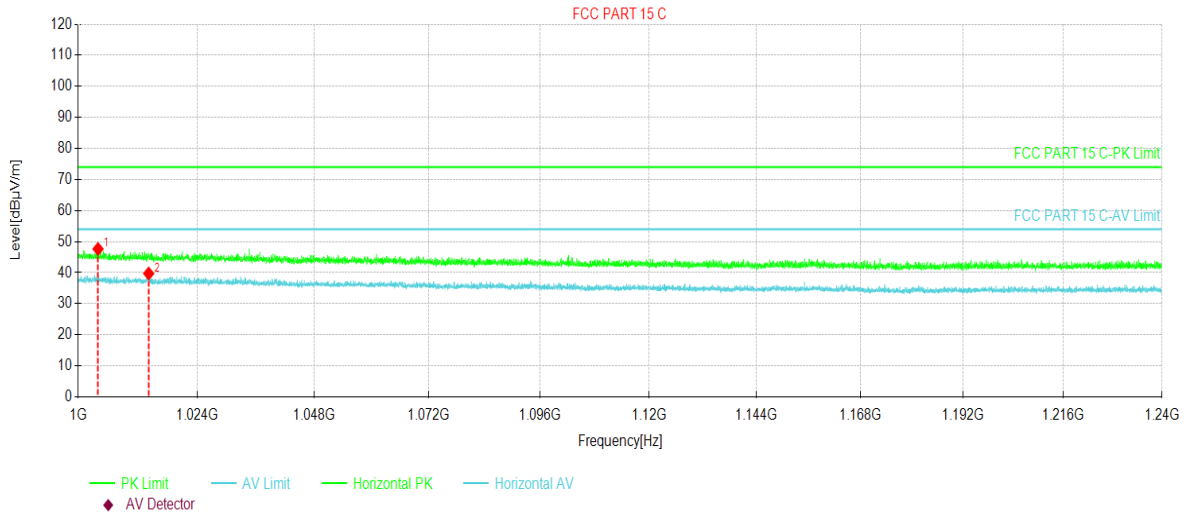


NO.	Freq. [MHz]	Reading [dBµV/m]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Trace	Polarity
1	1003.96	44.55	47.63	3.08	74.00	26.37	PK	Horizontal
2	1014.10	36.80	39.72	2.92	54.00	14.28	AV	Horizontal

Remark:

- Final Level = Receiver Read level + Factor(Antenna Factor + Cable Loss – Preamplifier Factor).
- The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

Product Name:	Image transmission Module	Product Model:	M240958S
Test By:	Mike	Test mode:	900MHz-16QAM Tx mode
Test Channel:	Highest channel	Polarization:	Vertical
Test Voltage:	DC 20V	Environment:	Temp: 24°C Humi: 57%

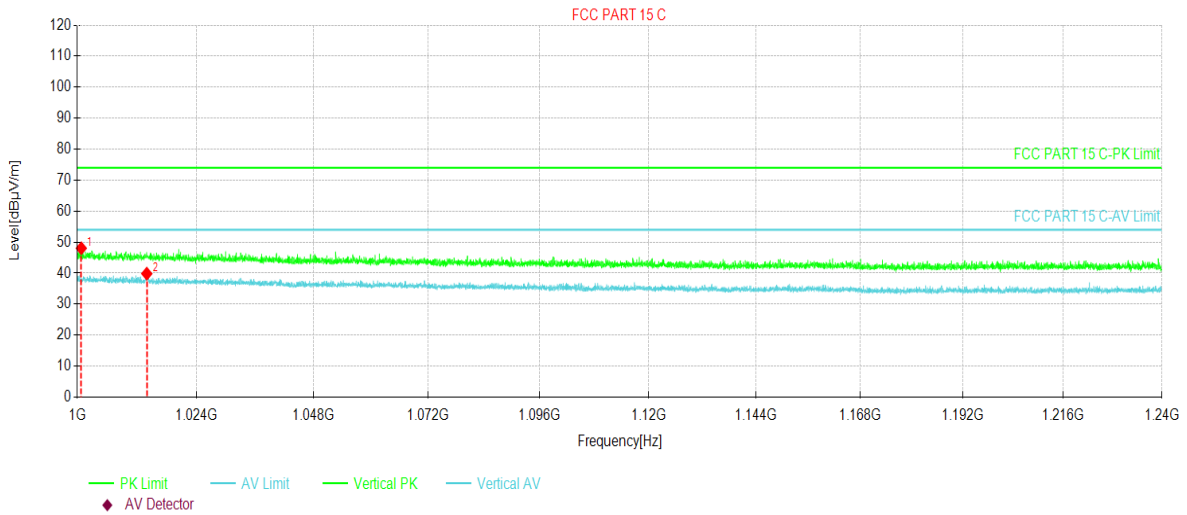


NO.	Freq. [MHz]	Reading [dBµV/m]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Trace	Polarity
1	1000.81	44.90	48.03	3.13	74.00	25.97	PK	Vertical
2	1013.89	36.91	39.83	2.92	54.00	14.17	AV	Vertical

Remark:

- Final Level = Receiver Read level + Factor(Antenna Factor + Cable Loss – Preamplifier Factor).
- The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

Product Name:	Image transmission Module	Product Model:	M240958S
Test By:	Mike	Test mode:	2.4GHz-QPSK Tx mode
Test Channel:	Lowest channel	Polarization:	Horizontal
Test Voltage:	DC 20V	Environment:	Temp: 24°C Huni: 57%

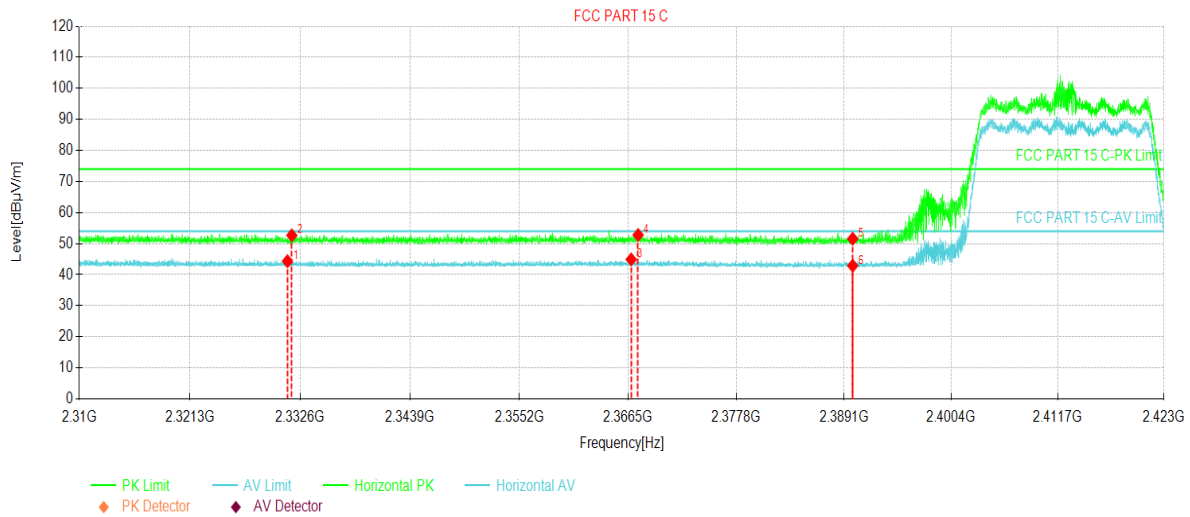


NO.	Freq. [MHz]	Reading [dBµV/m]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Trace	Polarity
1	2331.27	37.46	44.34	6.88	54.00	9.66	AV	Horizontal
2	2331.72	45.77	52.65	6.88	74.00	21.35	PK	Horizontal
3	2366.82	37.90	44.90	7.00	54.00	9.10	AV	Horizontal
4	2367.54	45.78	52.78	7.00	74.00	21.22	PK	Horizontal
5	2390.01	44.48	51.56	7.08	74.00	22.44	PK	Horizontal
6	2390.01	35.80	42.88	7.08	54.00	11.12	AV	Horizontal

Remark:

1. Final Level = Receiver Read level + Factor(Antenna Factor + Cable Loss – Preamplifier Factor).
2. The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

Product Name:	Image transmission Module	Product Model:	M240958S
Test By:	Mike	Test mode:	2.4GHz-QPSK Tx mode
Test Channel:	Lowest channel	Polarization:	Vertical
Test Voltage:	DC 20V	Environment:	Temp: 24°C Humi: 57%

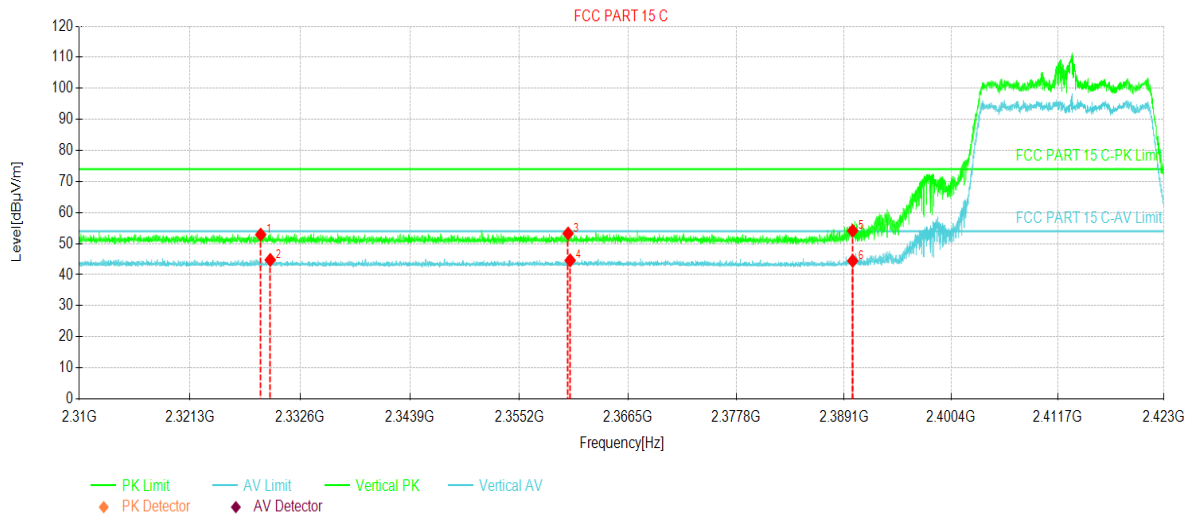


NO.	Freq. [MHz]	Reading [dBuV/m]	Level [dBuV/m]	Factor [dB]	Limit [dBuV/m]	Margin [dB]	Trace	Polarity
1	2328.53	46.02	52.89	6.87	74.00	21.11	PK	Vertical
2	2329.50	37.88	44.76	6.88	54.00	9.24	AV	Vertical
3	2360.25	46.27	53.25	6.98	74.00	20.75	PK	Vertical
4	2360.46	37.62	44.60	6.98	54.00	9.40	AV	Vertical
5	2390.01	47.05	54.13	7.08	74.00	19.87	PK	Vertical
6	2390.01	37.37	44.45	7.08	54.00	9.55	AV	Vertical

Remark:

- Final Level = Receiver Read level + Factor(Antenna Factor + Cable Loss – Preamplifier Factor).
- The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

Product Name:	Image transmission Module	Product Model:	M240958S
Test By:	Mike	Test mode:	2.4GHz-QPSK Tx mode
Test Channel:	Highest channel	Polarization:	Horizontal
Test Voltage:	DC 20V	Environment:	Temp: 24°C Huni: 57%

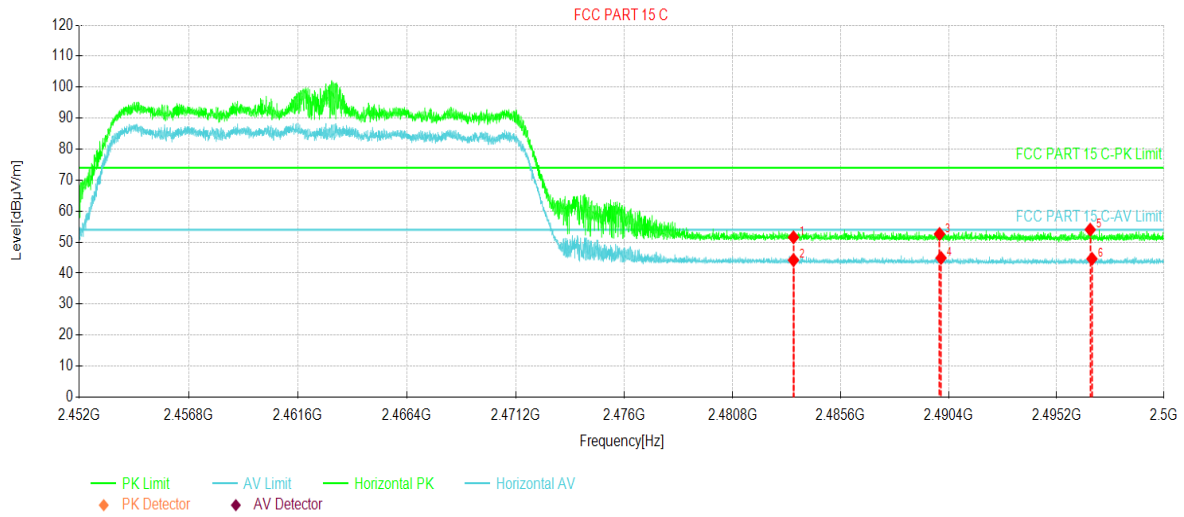


NO.	Freq. [MHz]	Reading [dBuV/m]	Level [dBuV/m]	Factor [dB]	Limit [dBuV/m]	Margin [dB]	Trace	Polarity
1	2483.50	43.88	51.57	7.69	74.00	22.43	PK	Horizontal
2	2483.50	36.52	44.21	7.69	54.00	9.79	AV	Horizontal
3	2489.99	44.89	52.62	7.73	74.00	21.38	PK	Horizontal
4	2490.05	37.17	44.90	7.73	54.00	9.10	AV	Horizontal
5	2496.70	46.25	54.03	7.78	74.00	19.97	PK	Horizontal
6	2496.78	36.84	44.62	7.78	54.00	9.38	AV	Horizontal

Remark:

- Final Level = Receiver Read level + Factor(Antenna Factor + Cable Loss – Preamplifier Factor).
- The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

Product Name:	Image transmission Module	Product Model:	M240958S
Test By:	Mike	Test mode:	2.4GHz-QPSK Tx mode
Test Channel:	Highest channel	Polarization:	Vertical
Test Voltage:	DC 20V	Environment:	Temp: 24°C Humi: 57%

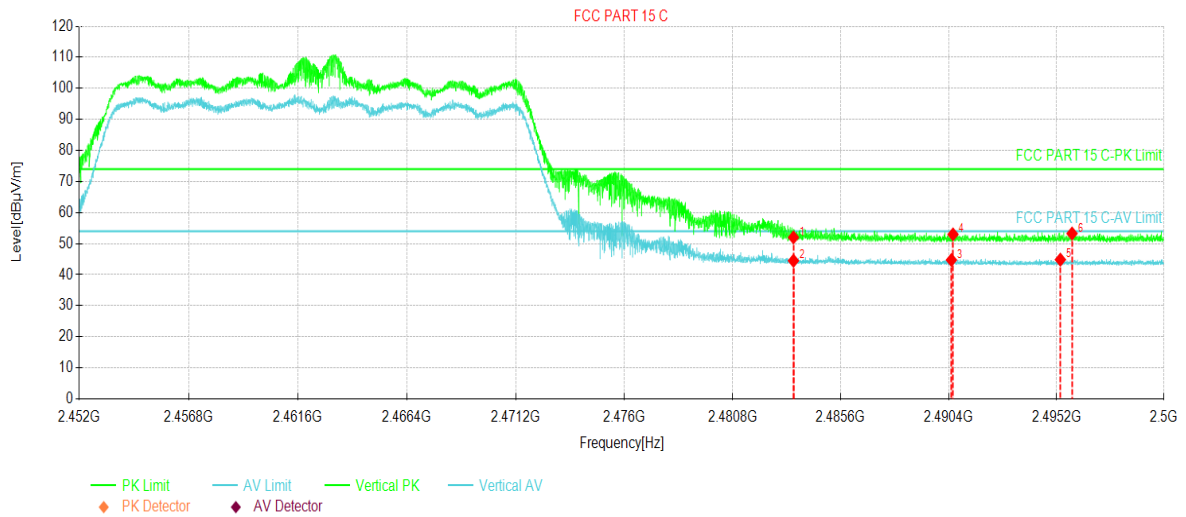


NO.	Freq. [MHz]	Reading [dBµV/m]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Trace	Polarity
1	2483.50	44.31	52.00	7.69	74.00	22.00	PK	Vertical
2	2483.50	36.80	44.49	7.69	54.00	9.51	AV	Vertical
3	2490.52	37.00	44.73	7.73	54.00	9.27	AV	Vertical
4	2490.59	45.24	52.98	7.74	74.00	21.02	PK	Vertical
5	2495.37	37.06	44.83	7.77	54.00	9.17	AV	Vertical
6	2495.89	45.48	53.25	7.77	74.00	20.75	PK	Vertical

Remark:

- Final Level = Receiver Read level + Factor(Antenna Factor + Cable Loss – Preamplifier Factor).
- The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

Product Name:	Image transmission Module	Product Model:	M240958S
Test By:	Mike	Test mode:	2.4GHz-16QAM Tx mode
Test Channel:	Lowest channel	Polarization:	Horizontal
Test Voltage:	DC 20V	Environment:	Temp: 24°C Huni: 57%

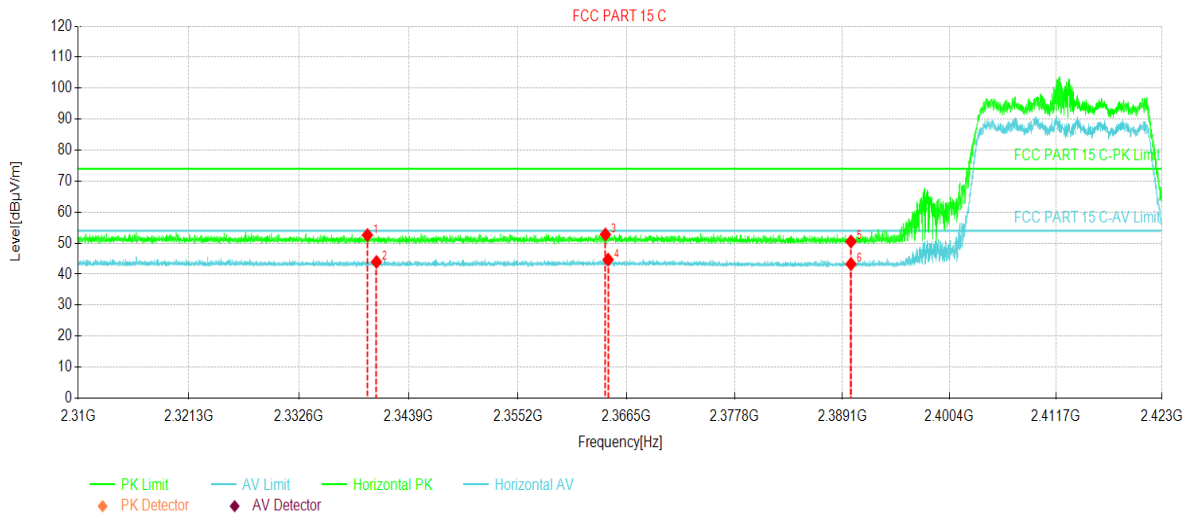


NO.	Freq. [MHz]	Reading [dBµV/m]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Trace	Polarity
1	2339.63	45.67	52.58	6.91	74.00	21.42	PK	Horizontal
2	2340.56	37.03	43.94	6.91	54.00	10.06	AV	Horizontal
3	2364.29	45.80	52.79	6.99	74.00	21.21	PK	Horizontal
4	2364.57	37.68	44.67	6.99	54.00	9.33	AV	Horizontal
5	2390.01	43.44	50.52	7.08	74.00	23.48	PK	Horizontal
6	2390.01	36.16	43.24	7.08	54.00	10.76	AV	Horizontal

Remark:

- Final Level = Receiver Read level + Factor(Antenna Factor + Cable Loss – Pre-amplifier Factor).
- The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

Product Name:	Image transmission Module	Product Model:	M240958S
Test By:	Mike	Test mode:	2.4GHz-16QAM Tx mode
Test Channel:	Lowest channel	Polarization:	Vertical
Test Voltage:	DC 20V	Environment:	Temp: 24°C Humi: 57%

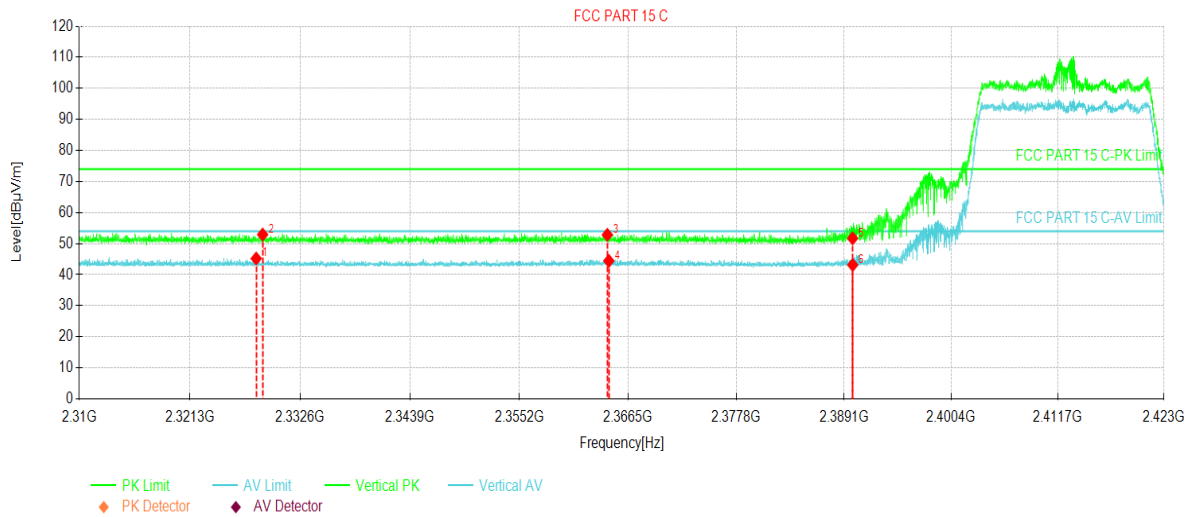


NO.	Freq. [MHz]	Reading [dBuV/m]	Level [dBuV/m]	Factor [dB]	Limit [dBuV/m]	Margin [dB]	Trace	Polarity
1	2328.06	38.33	45.20	6.87	54.00	8.80	AV	Vertical
2	2328.72	46.05	52.92	6.87	74.00	21.08	PK	Vertical
3	2364.33	45.85	52.84	6.99	74.00	21.16	PK	Vertical
4	2364.49	37.45	44.44	6.99	54.00	9.56	AV	Vertical
5	2390.01	44.62	51.70	7.08	74.00	22.30	PK	Vertical
6	2390.01	36.05	43.13	7.08	54.00	10.87	AV	Vertical

Remark:

1. Final Level = Receiver Read level + Factor(Antenna Factor + Cable Loss – Preamplifier Factor).
2. The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

Product Name:	Image transmission Module	Product Model:	M240958S
Test By:	Mike	Test mode:	2.4GHz-16QAM Tx mode
Test Channel:	Highest channel	Polarization:	Horizontal
Test Voltage:	DC 20V	Environment:	Temp: 24°C Huni: 57%

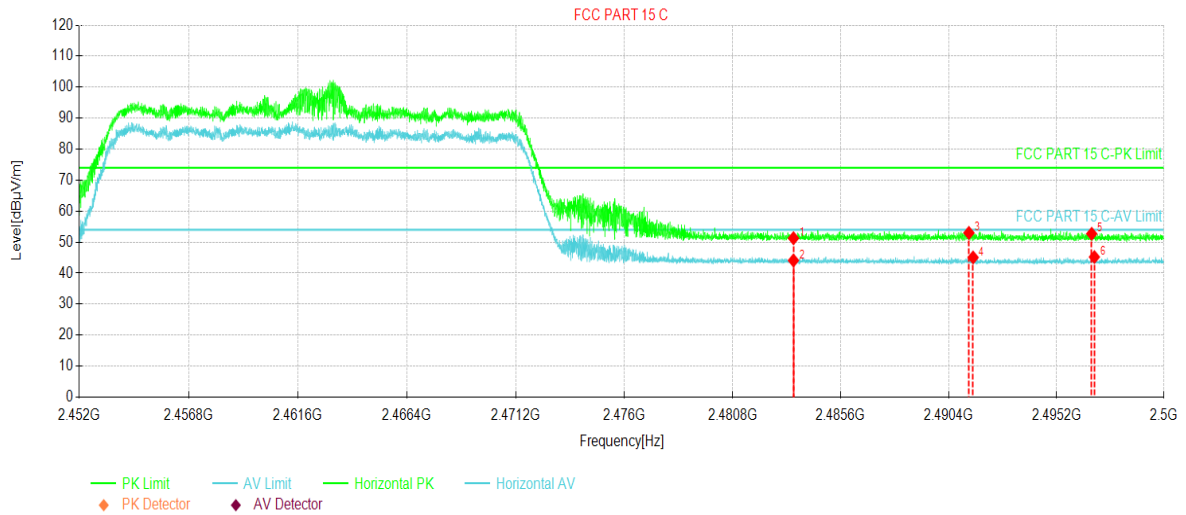


NO.	Freq. [MHz]	Reading [dBuV/m]	Level [dBuV/m]	Factor [dB]	Limit [dBuV/m]	Margin [dB]	Trace	Polarity
1	2483.50	43.57	51.26	7.69	74.00	22.74	PK	Horizontal
2	2483.50	36.40	44.09	7.69	54.00	9.91	AV	Horizontal
3	2491.30	45.24	52.98	7.74	74.00	21.02	PK	Horizontal
4	2491.48	37.32	45.06	7.74	54.00	8.94	AV	Horizontal
5	2496.77	44.93	52.71	7.78	74.00	21.29	PK	Horizontal
6	2496.89	37.42	45.20	7.78	54.00	8.80	AV	Horizontal

Remark:

- Final Level = Receiver Read level + Factor(Antenna Factor + Cable Loss – Preamplifier Factor).
- The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

Product Name:	Image transmission Module	Product Model:	M240958S
Test By:	Mike	Test mode:	2.4GHz-16QAM Tx mode
Test Channel:	Highest channel	Polarization:	Vertical
Test Voltage:	DC 20V	Environment:	Temp: 24°C Huni: 57%

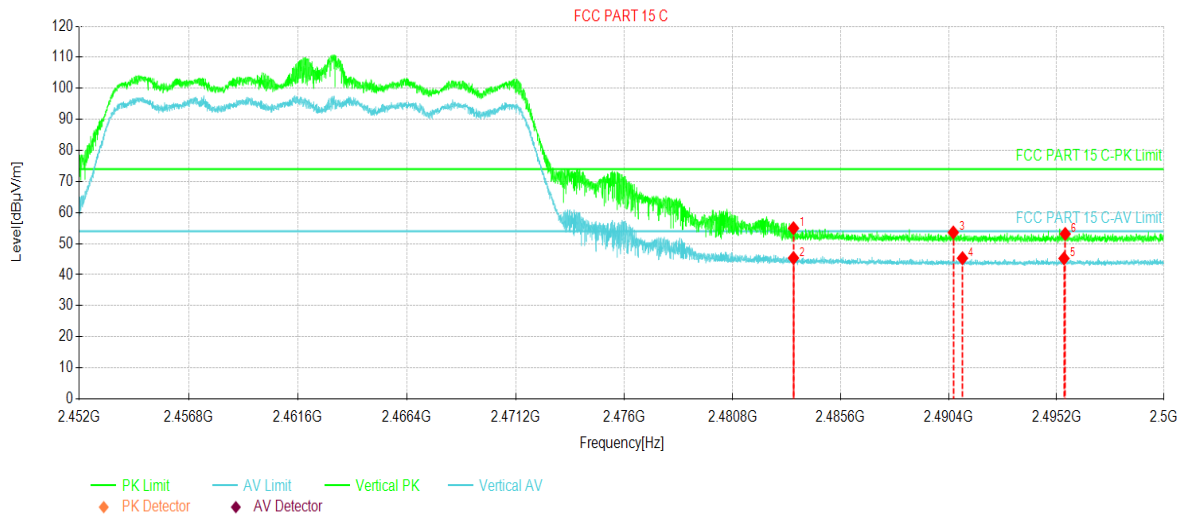

NO.	Freq. [MHz]	Reading [dBµV/m]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Trace	Polarity
1	2483.50	47.27	54.96	7.69	74.00	19.04	PK	Vertical
2	2483.50	37.67	45.36	7.69	54.00	8.64	AV	Vertical
3	2490.60	45.85	53.59	7.74	74.00	20.41	PK	Vertical
4	2491.01	37.57	45.31	7.74	54.00	8.69	AV	Vertical
5	2495.53	37.46	45.23	7.77	54.00	8.77	AV	Vertical
6	2495.59	45.35	53.12	7.77	74.00	20.88	PK	Vertical


Remark:

- Final Level = Receiver Read level + Factor(Antenna Factor + Cable Loss – Preamplifier Factor).
- The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

ANT Type 2:

BW: 1.4MHz

Product Name:	Image transmission Module	Product Model:	M240958S
Test By:	Mike	Test mode:	900MHz-QPSK Tx mode
Test Channel:	Highest channel	Polarization:	Horizontal
Test Voltage:	DC 20V	Environment:	Temp: 24°C Humi: 57%

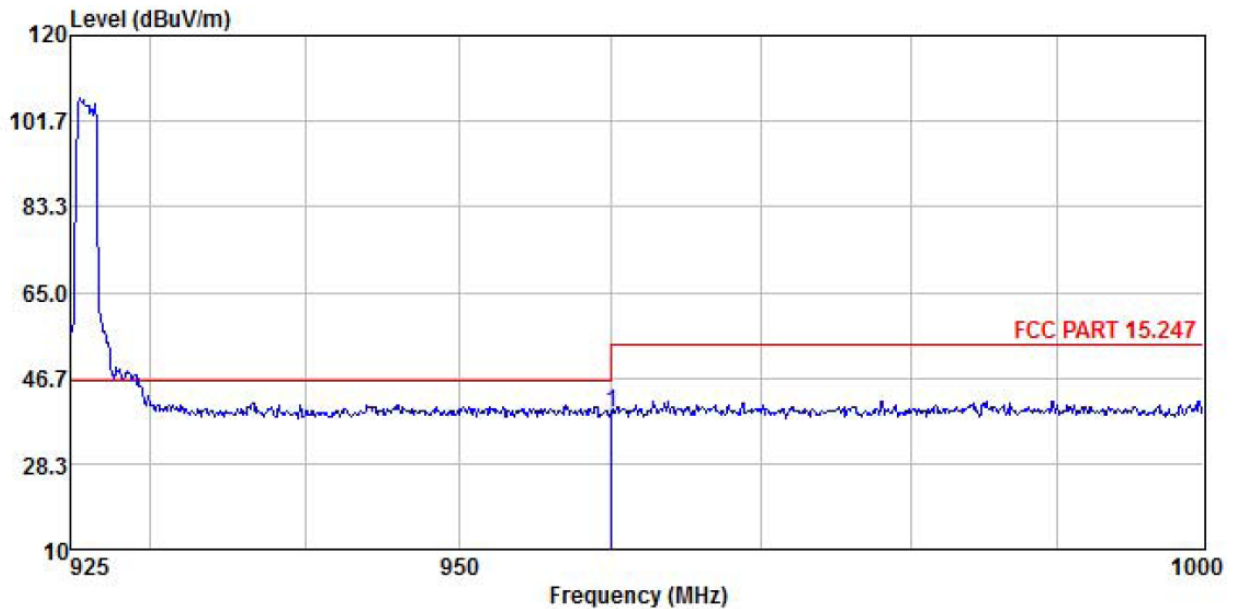


	Freq	ReadAntenna	Cable	Preamp	Limit	Over	Remark
	MHz	Level	Loss	Factor	Line	Limit	
		dBuV	dB	dB	dBuV/m	dBuV/m	dB
1	960.046	12.81	22.86	3.51	0.00	39.18	54.00 -14.82

Remark:

- Final Level = Receiver Read level + Factor(Antenna Factor + Cable Loss – Preamplifier Factor).
- The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

Product Name:	Image transmission Module	Product Model:	M240958S
Test By:	Mike	Test mode:	900MHz-QPSK Tx mode
Test Channel:	Highest channel	Polarization:	Vertical
Test Voltage:	DC 20V	Environment:	Temp: 24°C Humi: 57%

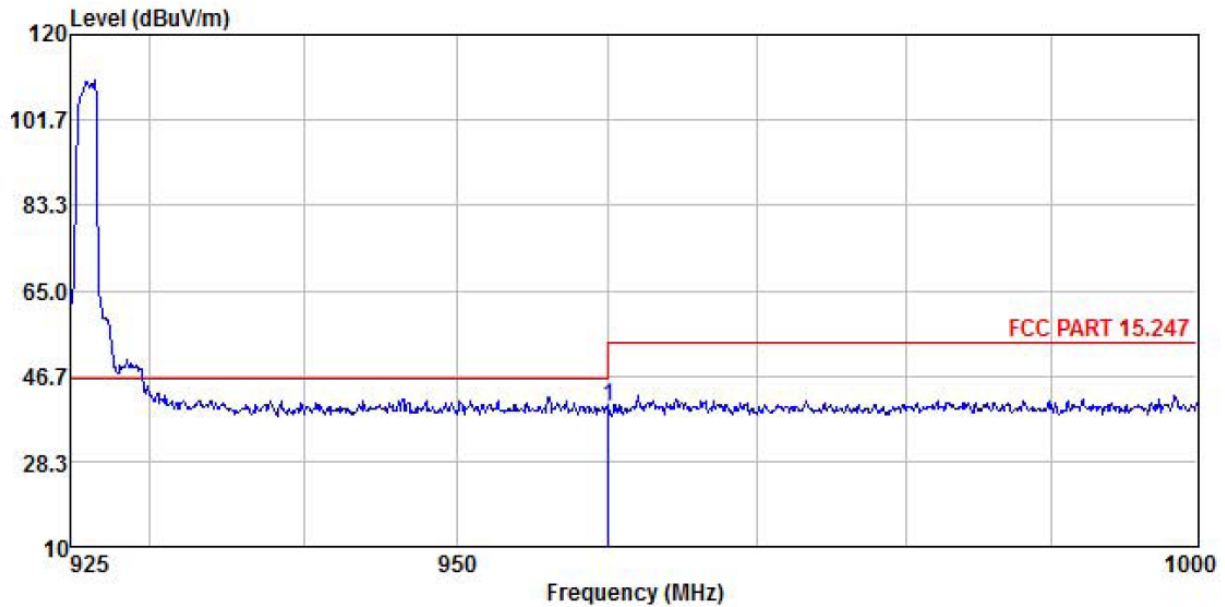


	ReadAntenna	Cable	Preamp	Limit	Over			
Freq	Level	Factor	Loss	Factor	Level	Line		
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m		
1	960.046	13.72	22.86	3.51	0.00	40.09	54.00	-13.91

Remark:

- Final Level = Receiver Read level + Factor(Antenna Factor + Cable Loss – Pre-amplifier Factor).
- The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

Product Name:	Image transmission Module	Product Model:	M240958S
Test By:	Mike	Test mode:	900MHz-QPSK Tx mode
Test Channel:	Highest channel	Polarization:	Horizontal
Test Voltage:	DC 20V	Environment:	Temp: 24°C Huni: 57%

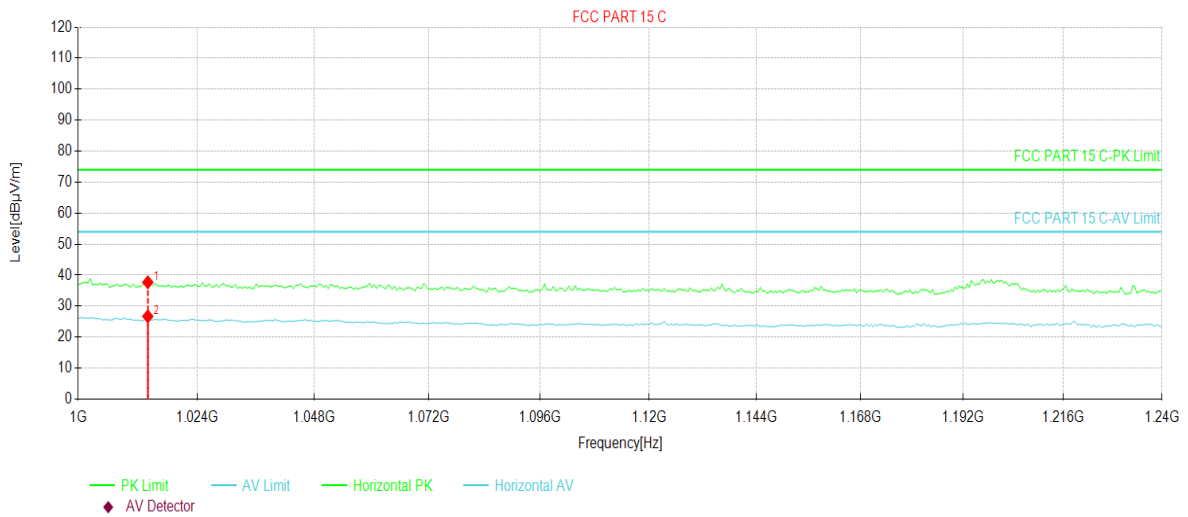


NO.	Freq. [MHz]	Reading [dBµV/m]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Trace	Polarity
1	1013.92	59.45	37.70	-21.75	74.00	36.30	PK	Horizontal
2	1013.92	48.46	26.71	-21.75	54.00	27.29	AV	Horizontal

Remark:

- Final Level = Receiver Read level + Factor(Antenna Factor + Cable Loss – Pre-amplifier Factor).
- The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

Product Name:	Image transmission Module	Product Model:	M240958S
Test By:	Mike	Test mode:	900MHz-QPSK Tx mode
Test Channel:	Highest channel	Polarization:	Vertical
Test Voltage:	DC 20V	Environment:	Temp: 24°C Huni: 57%

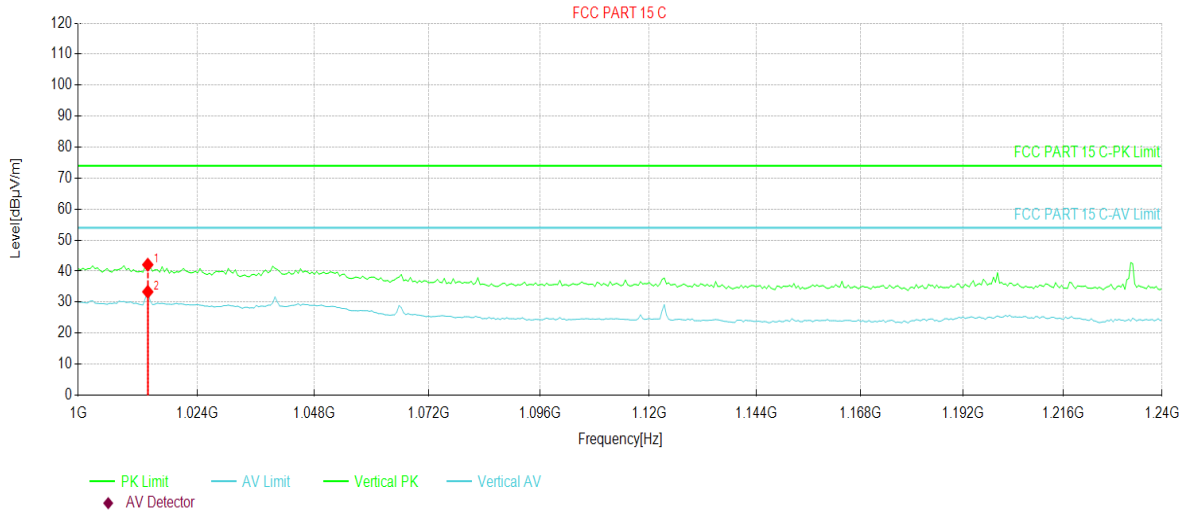


NO.	Freq. [MHz]	Reading [dBµV/m]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Trace	Polarity
1	1013.92	63.82	42.07	-21.75	74.00	31.93	PK	Vertical
2	1013.92	55.08	33.33	-21.75	54.00	20.67	AV	Vertical

Remark:

- Final Level = Receiver Read level + Factor(Antenna Factor + Cable Loss – Pre-amplifier Factor).
- The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

Product Name:	Image transmission Module	Product Model:	M240958S
Test By:	Mike	Test mode:	900MHz-16QAM Tx mode
Test Channel:	Highest channel	Polarization:	Horizontal
Test Voltage:	DC 20V	Environment:	Temp: 24°C Huni: 57%

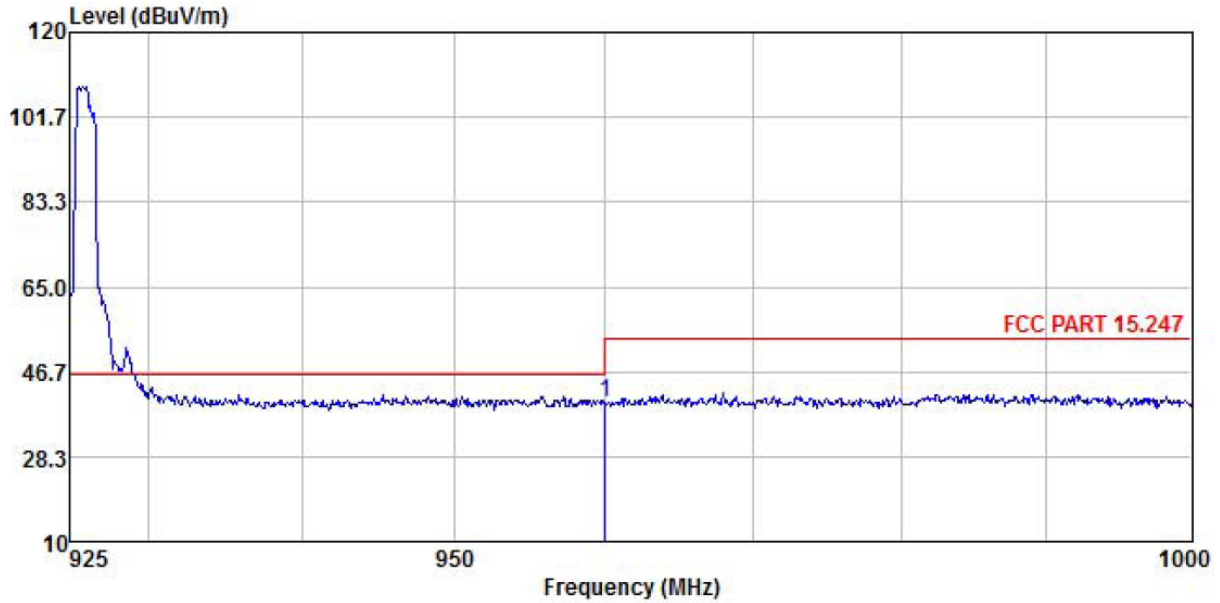


	Read	Antenna	Cable	Preamp	Limit	Over		
Freq	Level	Factor	Loss	Factor	Line	Limit	Remark	
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	960.046	13.54	22.86	3.51	0.00	39.91	54.00	-14.09

Remark:

- Final Level = Receiver Read level + Factor(Antenna Factor + Cable Loss – Preamplifier Factor).
- The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

Product Name:	Image transmission Module	Product Model:	M240958S
Test By:	Mike	Test mode:	900MHz-16QAM Tx mode
Test Channel:	Highest channel	Polarization:	Vertical
Test Voltage:	DC 20V	Environment:	Temp: 24°C Humi: 57%

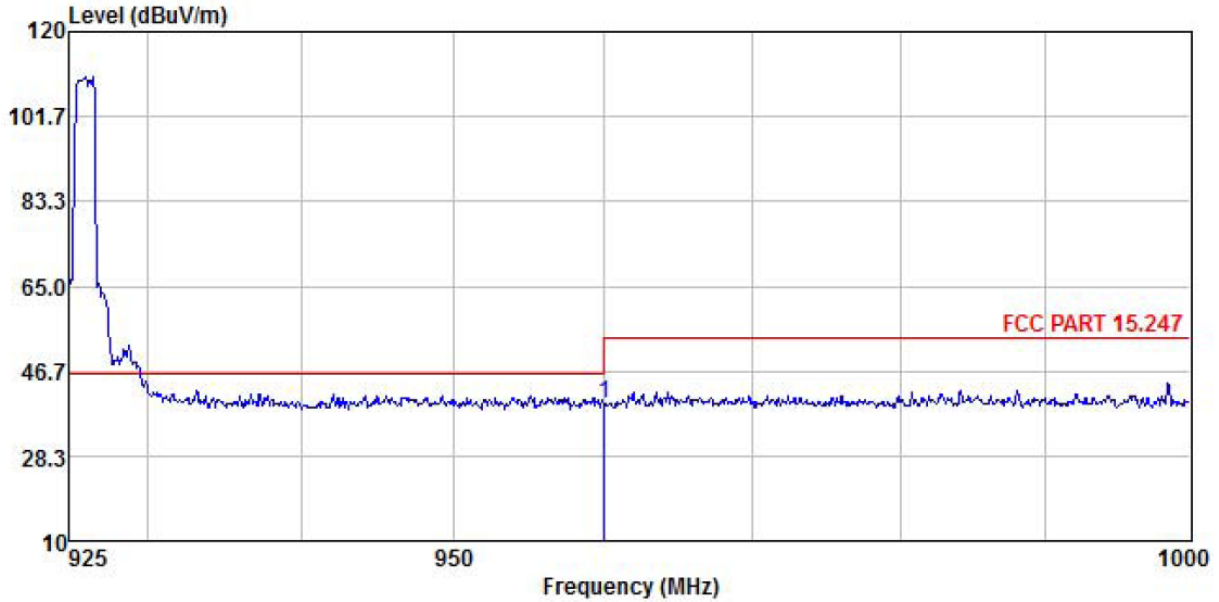


	Read	Antenna	Cable	Preamp	Limit	Over	
Freq	Level	Factor	Loss	Factor	Line	Limit	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1	960.046	13.08	22.86	3.51	0.00	39.45	54.00 -14.55

Remark:

- Final Level = Receiver Read level + Factor(Antenna Factor + Cable Loss – Pre-amplifier Factor).
- The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

Product Name:	Image transmission Module	Product Model:	M240958S
Test By:	Mike	Test mode:	900MHz-16QAM Tx mode
Test Channel:	Highest channel	Polarization:	Horizontal
Test Voltage:	DC 20V	Environment:	Temp: 24℃ Humi: 57%

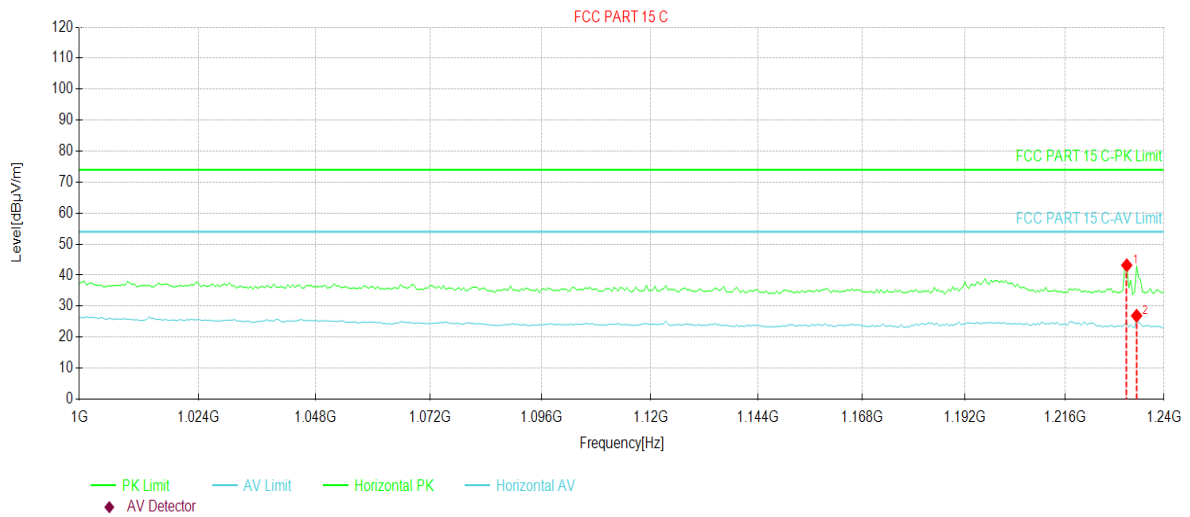


NO.	Freq. [MHz]	Reading [dBµV/m]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Trace	Polarity
1	1230.88	66.63	43.19	-23.44	74.00	30.81	PK	Horizontal
2	1233.28	50.32	26.89	-23.43	54.00	27.11	AV	Horizontal

Remark:

- Final Level = Receiver Read level + Factor(Antenna Factor + Cable Loss – Pre-amplifier Factor).
- The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

Product Name:	Image transmission Module	Product Model:	M240958S
Test By:	Mike	Test mode:	900MHz-16QAM Tx mode
Test Channel:	Highest channel	Polarization:	Vertical
Test Voltage:	DC 20V	Environment:	Temp: 24°C Huni: 57%

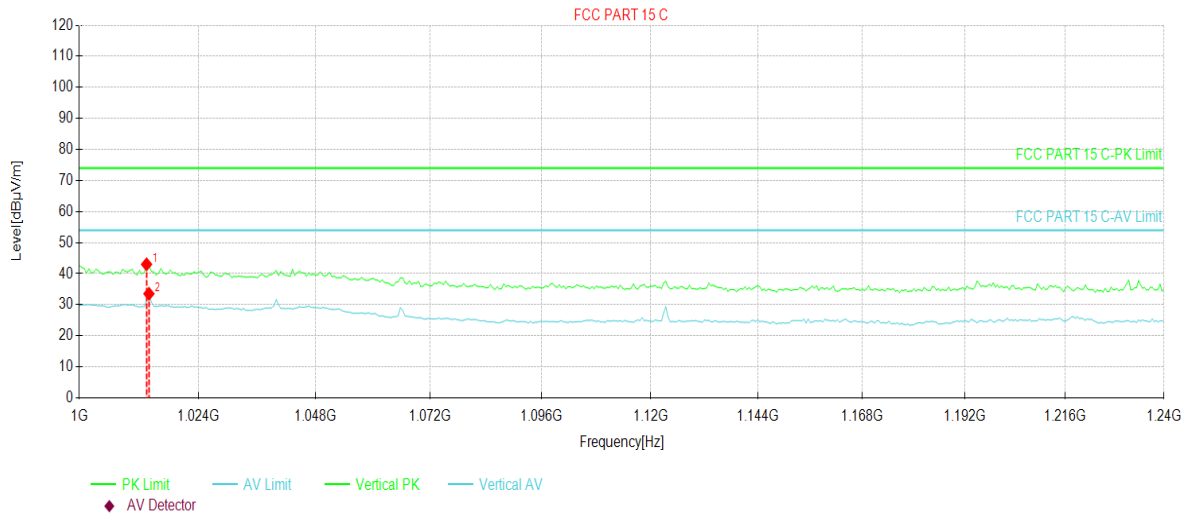


NO.	Freq. [MHz]	Reading [dBµV/m]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Trace	Polarity
1	1013.44	64.74	43.00	-21.74	74.00	31.00	PK	Vertical
2	1013.92	55.28	33.53	-21.75	54.00	20.47	AV	Vertical

Remark:

- Final Level = Receiver Read level + Factor(Antenna Factor + Cable Loss – Pre-amplifier Factor).
- The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

Product Name:	Image transmission Module	Product Model:	M240958S
Test By:	Mike	Test mode:	2.4GHz-QPSK Tx mode
Test Channel:	Lowest channel	Polarization:	Horizontal
Test Voltage:	DC 20V	Environment:	Temp: 24°C Huni: 57%

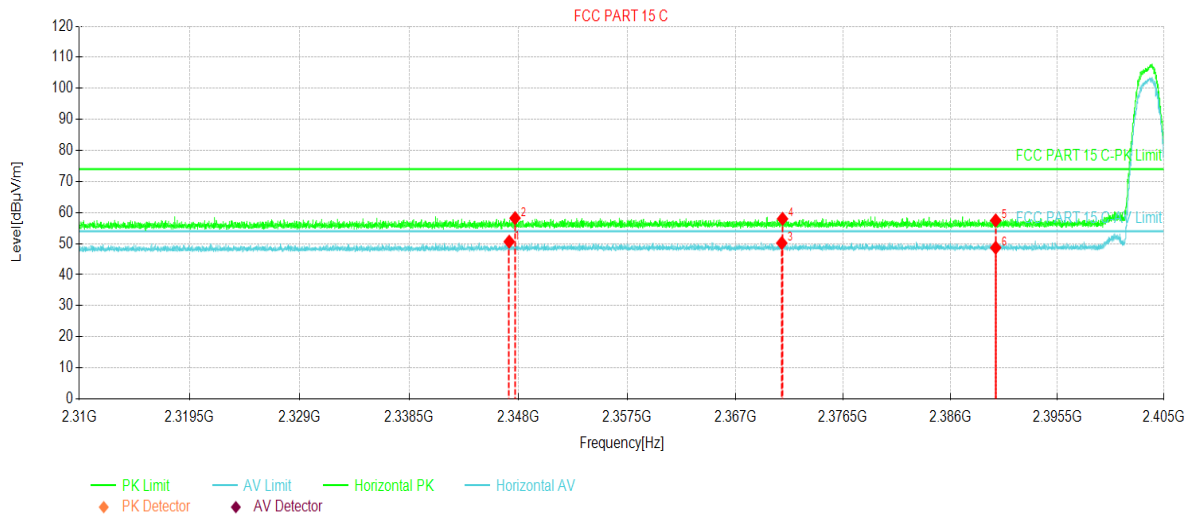


NO.	Freq. [MHz]	Reading [dBµV/m]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Trace	Polarity
1	2347.19	43.69	50.63	6.94	54.00	3.37	AV	Horizontal
2	2347.70	51.26	58.20	6.94	74.00	15.80	PK	Horizontal
3	2371.09	43.18	50.19	7.01	54.00	3.81	AV	Horizontal
4	2371.15	50.98	57.99	7.01	74.00	16.01	PK	Horizontal
5	2390.00	50.39	57.47	7.08	74.00	16.53	PK	Horizontal
6	2390.00	41.61	48.69	7.08	54.00	5.31	AV	Horizontal

Remark:

- Final Level = Receiver Read level + Factor(Antenna Factor + Cable Loss – Pre-amplifier Factor).
- The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

Product Name:	Image transmission Module	Product Model:	M240958S
Test By:	Mike	Test mode:	2.4GHz-QPSK Tx mode
Test Channel:	Lowest channel	Polarization:	Vertical
Test Voltage:	DC 20V	Environment:	Temp: 24°C Humi: 57%

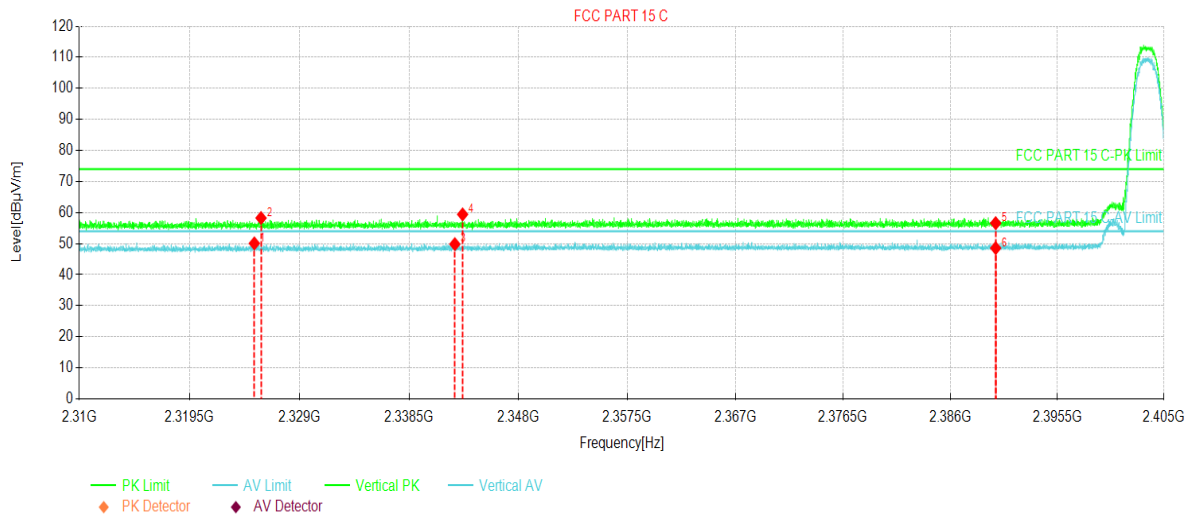


NO.	Freq. [MHz]	Reading [dBuV/m]	Level [dBuV/m]	Factor [dB]	Limit [dBuV/m]	Margin [dB]	Trace	Polarity
1	2325.07	43.21	50.07	6.86	54.00	3.93	AV	Vertical
2	2325.65	51.38	58.24	6.86	74.00	15.76	PK	Vertical
3	2342.46	42.91	49.83	6.92	54.00	4.17	AV	Vertical
4	2343.13	52.48	59.40	6.92	74.00	14.60	PK	Vertical
5	2390.00	49.51	56.59	7.08	74.00	17.41	PK	Vertical
6	2390.00	41.47	48.55	7.08	54.00	5.45	AV	Vertical

Remark:

- Final Level = Receiver Read level + Factor(Antenna Factor + Cable Loss – Pre-amplifier Factor).
- The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

Product Name:	Image transmission Module	Product Model:	M240958S
Test By:	Mike	Test mode:	2.4GHz-QPSK Tx mode
Test Channel:	Highest channel	Polarization:	Horizontal
Test Voltage:	DC 20V	Environment:	Temp: 24°C Huni: 57%

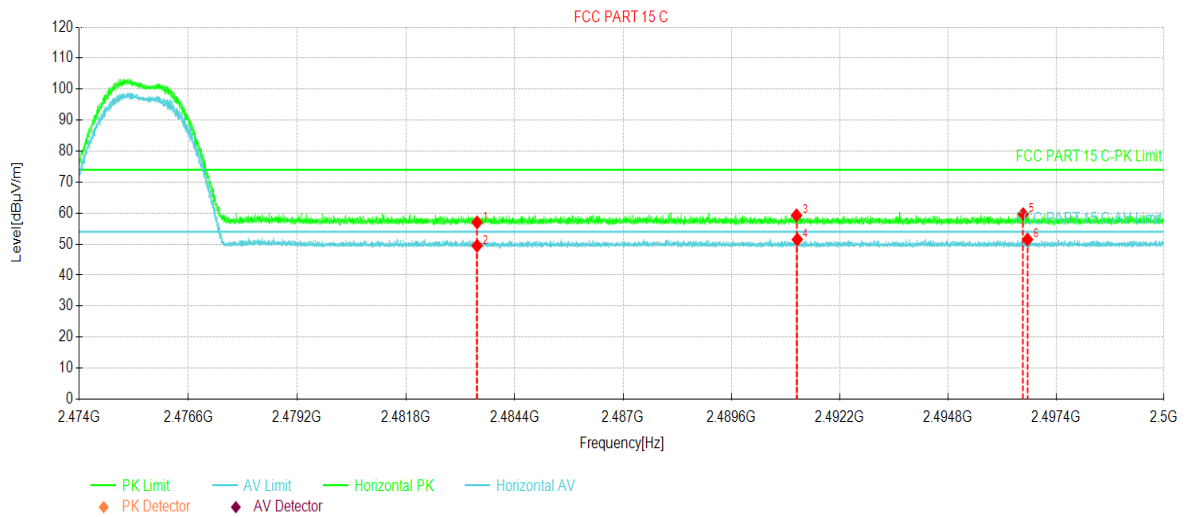


NO.	Freq. [MHz]	Reading [dBuV/m]	Level [dBuV/m]	Factor [dB]	Limit [dBuV/m]	Margin [dB]	Trace	Polarity
1	2483.50	49.33	57.02	7.69	74.00	16.98	PK	Horizontal
2	2483.50	41.77	49.46	7.69	54.00	4.54	AV	Horizontal
3	2491.16	51.55	59.29	7.74	74.00	14.71	PK	Horizontal
4	2491.17	43.75	51.49	7.74	54.00	2.51	AV	Horizontal
5	2496.60	51.89	59.67	7.78	74.00	14.33	PK	Horizontal
6	2496.71	43.73	51.51	7.78	54.00	2.49	AV	Horizontal

Remark:

- Final Level = Receiver Read level + Factor(Antenna Factor + Cable Loss – Pre-amplifier Factor).
- The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

Product Name:	Image transmission Module	Product Model:	M240958S
Test By:	Mike	Test mode:	2.4GHz-QPSK Tx mode
Test Channel:	Highest channel	Polarization:	Vertical
Test Voltage:	DC 20V	Environment:	Temp: 24°C Huni: 57%

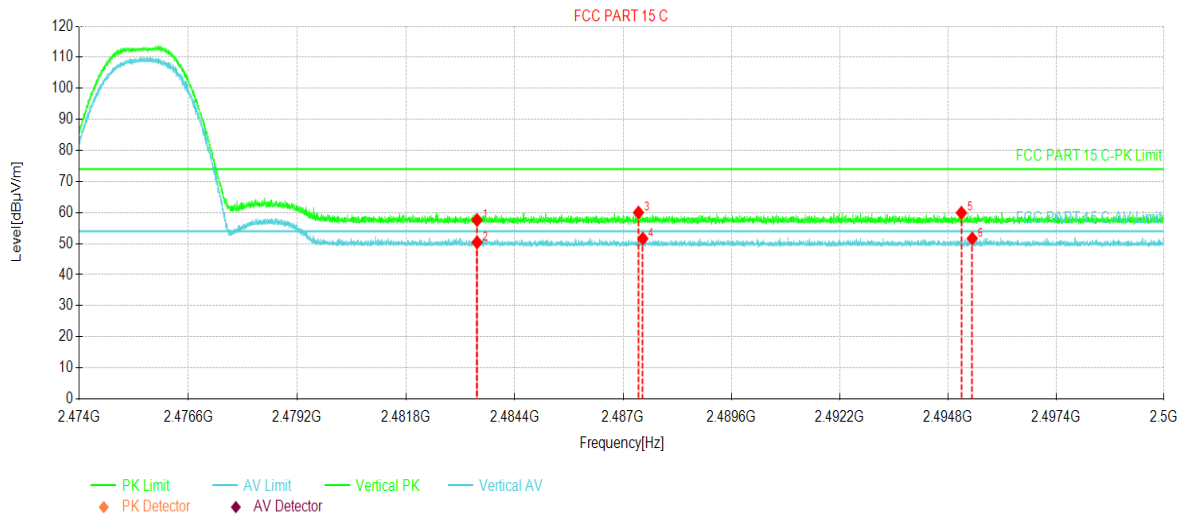


NO.	Freq. [MHz]	Reading [dBµV/m]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Trace	Polarity
1	2483.50	49.90	57.59	7.69	74.00	16.41	PK	Vertical
2	2483.50	42.70	50.39	7.69	54.00	3.61	AV	Vertical
3	2487.37	52.28	59.99	7.71	74.00	14.01	PK	Vertical
4	2487.47	43.91	51.62	7.71	54.00	2.38	AV	Vertical
5	2495.12	52.14	59.91	7.77	74.00	14.09	PK	Vertical
6	2495.38	43.88	51.65	7.77	54.00	2.35	AV	Vertical

Remark:

- Final Level = Receiver Read level + Factor(Antenna Factor + Cable Loss – Pre-amplifier Factor).
- The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

Product Name:	Image transmission Module	Product Model:	M240958S
Test By:	Mike	Test mode:	2.4GHz-16QAM Tx mode
Test Channel:	Lowest channel	Polarization:	Horizontal
Test Voltage:	DC 20V	Environment:	Temp: 24°C Huni: 57%

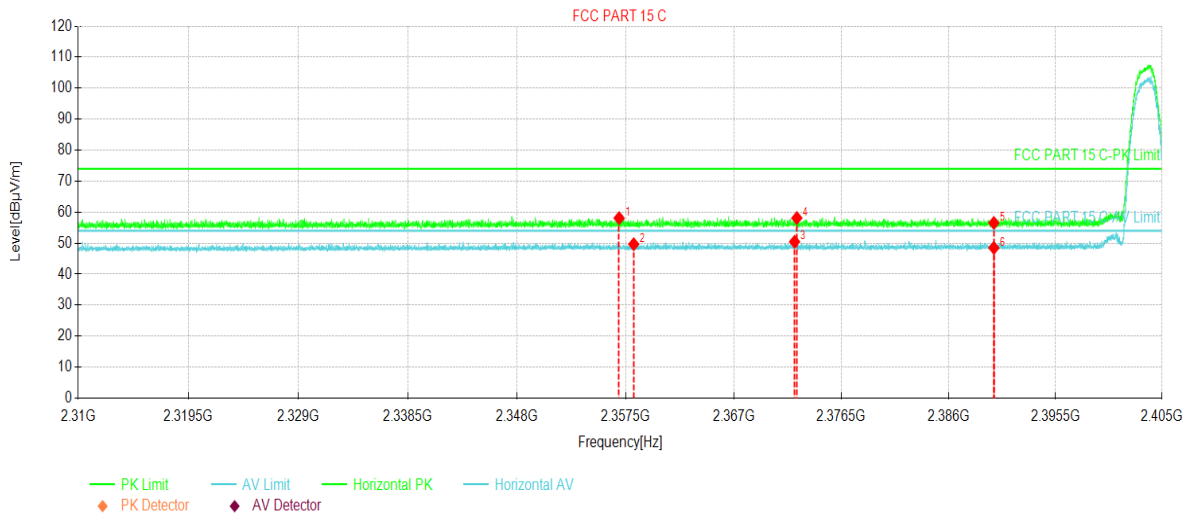

NO.	Freq. [MHz]	Reading [dBuV/m]	Level [dBuV/m]	Factor [dB]	Limit [dBuV/m]	Margin [dB]	Trace	Polarity
1	2356.93	51.11	58.08	6.97	74.00	15.92	PK	Horizontal
2	2358.21	42.70	49.67	6.97	54.00	4.33	AV	Horizontal
3	2372.36	43.44	50.46	7.02	54.00	3.54	AV	Horizontal
4	2372.56	51.08	58.10	7.02	74.00	15.90	PK	Horizontal
5	2390.00	49.43	56.51	7.08	74.00	17.49	PK	Horizontal
6	2390.00	41.39	48.47	7.08	54.00	5.53	AV	Horizontal

Remark:

- Final Level = Receiver Read level + Factor(Antenna Factor + Cable Loss – Pre-amplifier Factor).
- The emission levels of other frequencies are lower than the limit 20dB and not show in test report.