



FCC RADIO TEST REPORT

FCC ID : 2AGOZ-H38W
Equipment : Portal Go
Brand Name : FACEBOOK
Model Name : TN49KC
Applicant : Facebook Technologies, LLC
1 Hacker Way, Menlo Park, CA 94025, USA
Standard : FCC Part 15 Subpart C §15.247

The product was received on May 04, 2021 and testing was started from May 05, 2021 and completed on May 19, 2021. We, Sporton International Inc. EMC & Wireless Communications Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.

Louis Wu

Approved by: Louis Wu

Sporton International Inc. EMC & Wireless Communications Laboratory

No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C.)



Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
1 General Description.....	5
1.1 Product Feature of Equipment Under Test.....	5
1.2 Modification of EUT	5
1.3 Testing Location	6
1.4 Applicable Standards.....	6
2 Test Configuration of Equipment Under Test	7
2.1 Carrier Frequency Channel	7
2.2 Test Mode.....	8
2.3 Connection Diagram of Test System.....	9
2.4 Support Unit used in test configuration and system	9
2.5 EUT Operation Test Setup	10
2.6 Measurement Results Explanation Example.....	10
3 Test Result.....	11
3.1 6dB and 99% Bandwidth Measurement	11
3.2 Output Power Measurement.....	16
3.3 Power Spectral Density Measurement	17
3.4 Conducted Band Edges and Spurious Emission Measurement	22
3.5 Radiated Band Edges and Spurious Emission Measurement	27
3.6 AC Conducted Emission Measurement.....	31
3.7 Antenna Requirements	33
4 List of Measuring Equipment	34
5 Uncertainty of Evaluation.....	36
Appendix A. Conducted Test Results	
Appendix B. AC Conducted Emission Test Result	
Appendix C. Radiated Spurious Emission	
Appendix D. Radiated Spurious Emission Plots	
Appendix E. Duty Cycle Plots	
Appendix F. Setup Photographs	



Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.1	15.247(a)(2)	6dB Bandwidth	Pass	-
3.1	2.1049	99% Occupied Bandwidth	Reporting only	-
3.2	15.247(b)(3)	Output Power	Pass	-
3.3	15.247(e)	Power Spectral Density	Pass	-
3.4	15.247(d)	Conducted Band Edges and Spurious Emission	Pass	-
3.5	15.247(d)	Radiated Band Edges and Spurious Emission	Pass	Under limit 3.95 dB at 18000.000 MHz
3.6	15.207	AC Conducted Emission	Pass	Under limit 13.80 dB at 0.501 MHz
3.7	15.203 & 15.247(b)	Antenna Requirement	Pass	-

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

Reviewed by: Danny Lee

Report Producer: Celery Wei



1 General Description

1.1 Product Feature of Equipment Under Test

Bluetooth, Wi-Fi 2.4GHz 802.11b/g/n, and Wi-Fi 5GHz 802.11a/n/ac.

Product Specification subjective to this standard	
Antenna Type	WLAN: <Main>: Monopole Antenna <Aux.>: PIFA Antenna Bluetooth: PIFA Antenna

Antenna information		
2400 MHz ~ 2483.5 MHz	Peak Gain (dBi)	3.53

Remark: The above EUT's information was declared by manufacturer. Please refer to Comments and Explanations in report summary.

1.2 Modification of EUT

No modifications are made to the EUT during all test items.



1.3 Testing Location

Test Site	Sporton International Inc. EMC & Wireless Communications Laboratory
Test Site Location	No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C.) TEL: +886-3-327-3456 FAX: +886-3-328-4978
Test Site No.	Sporton Site No. TH02-HY, CO05-HY

Note: The test site complies with ANSI C63.4 2014 requirement.

Test Site	Sporton International Inc. Wensan Laboratory
Test Site Location	No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan (R.O.C.) TEL: +886-3-327-0868 FAX: +886-3-327-0855
Test Site No.	Sporton Site No. 03CH11-HY (TAF Code: 3786)
Remark	The Radiated Spurious Emission test item subcontracted to Sporton International Inc. Wensan Laboratory.

Note: The test site complies with ANSI C63.4 2014 requirement.

FCC designation No.: TW1190 and TW3786

1.4 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart C §15.247
- ♦ FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v05r02
- ♦ FCC KDB 414788 D01 Radiated Test Site v01r01
- ♦ ANSI C63.10-2013

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. The TAF code is not including all the FCC KDB listed without accreditation.
3. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



2 Test Configuration of Equipment Under Test

2.1 Carrier Frequency Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	0	2402	21	2444
	1	2404	22	2446
	2	2406	23	2448
	3	2408	24	2450
	4	2410	25	2452
	5	2412	26	2454
	6	2414	27	2456
	7	2416	28	2458
	8	2418	29	2460
	9	2420	30	2462
	10	2422	31	2464
	11	2424	32	2466
	12	2426	33	2468
	13	2428	34	2470
	14	2430	35	2472
	15	2432	36	2474
	16	2434	37	2476
	17	2436	38	2478
	18	2438	39	2480
	19	2440	-	-
20	2442	-	-	



2.2 Test Mode

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (Y plane) were recorded in this report.
- b. AC power line Conducted Emission was tested under maximum output power.

The following summary table is showing all test modes to demonstrate in compliance with the standard.

Summary table of Test Cases	
Test Item	Data Rate / Modulation
Conducted Test Cases	Bluetooth – LE / GFSK
	Mode 1: Bluetooth Tx CH00_2402 MHz_1Mbps
	Mode 2: Bluetooth Tx CH19_2440 MHz_1Mbps
	Mode 3: Bluetooth Tx CH39_2480 MHz_1Mbps
	Mode 4: Bluetooth Tx CH00_2402 MHz_2Mbps
	Mode 5: Bluetooth Tx CH19_2440 MHz_2Mbps
	Mode 6: Bluetooth Tx CH39_2480 MHz_2Mbps
Radiated Test Cases	Mode 1: Bluetooth Tx CH00_2402 MHz_1Mbps
	Mode 2: Bluetooth Tx CH19_2440 MHz_1Mbps
	Mode 3: Bluetooth Tx CH39_2480 MHz_1Mbps
	Mode 4: Bluetooth Tx CH00_2402 MHz_2Mbps
	Mode 5: Bluetooth Tx CH19_2440 MHz_2Mbps
	Mode 6: Bluetooth Tx CH39_2480 MHz_2Mbps
AC Conducted Emission	Mode 1 :WLAN (2.4GHz) Link + Bluetooth Link + H-Pattern + Docking (Charging from AC Adapter)

2.3 Connection Diagram of Test System



2.4 Support Unit used in test configuration and system

Item	Equipment	Brand Name	Model Name	FCC ID	Data Cable	Power Cord
1.	Bluetooth Earphone	Sony Ericsson	MW600	PY7DDA-2029	N/A	N/A
2.	WLAN AP	ASUS	RT-AC66U	MSQ-RTAC66U	N/A	Unshielded, 1.8 m
3.	Notebook	DELL	Latitude 3400	FCC DoC	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m



2.5 EUT Operation Test Setup

The RF test items, utility “QRCT Ver.4.0.00113” was installed in Notebook which was programmed in order to make the EUT get into the engineering modes to provide channel selection, power level, data rate and the application type and for continuous transmitting signals.

2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 4.2 dB and 10 dB attenuator.

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)}. \\ &= 4.2 + 10 = 14.2 \text{ (dB)} \end{aligned}$$

3 Test Result

3.1 6dB and 99% Bandwidth Measurement

3.1.1 Limit of 6dB and 99% Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.

3.1.2 Measuring Instruments

See list of measuring equipment of this test report.

3.1.3 Test Procedures

1. The testing follows the ANSI C63.10 Section 6.9.3 (OBW) and 11.8.1 (6dB BW).
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6dB bandwidth must be greater than 500 kHz.
5. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set 1-5% of the emission bandwidth and set the Video bandwidth (VBW) $\geq 3 * RBW$.
6. Measure and record the results in the test report.

3.1.4 Test Setup






3.1.5 Test Result of 6dB Bandwidth


Please refer to Appendix A.

<1Mbps>

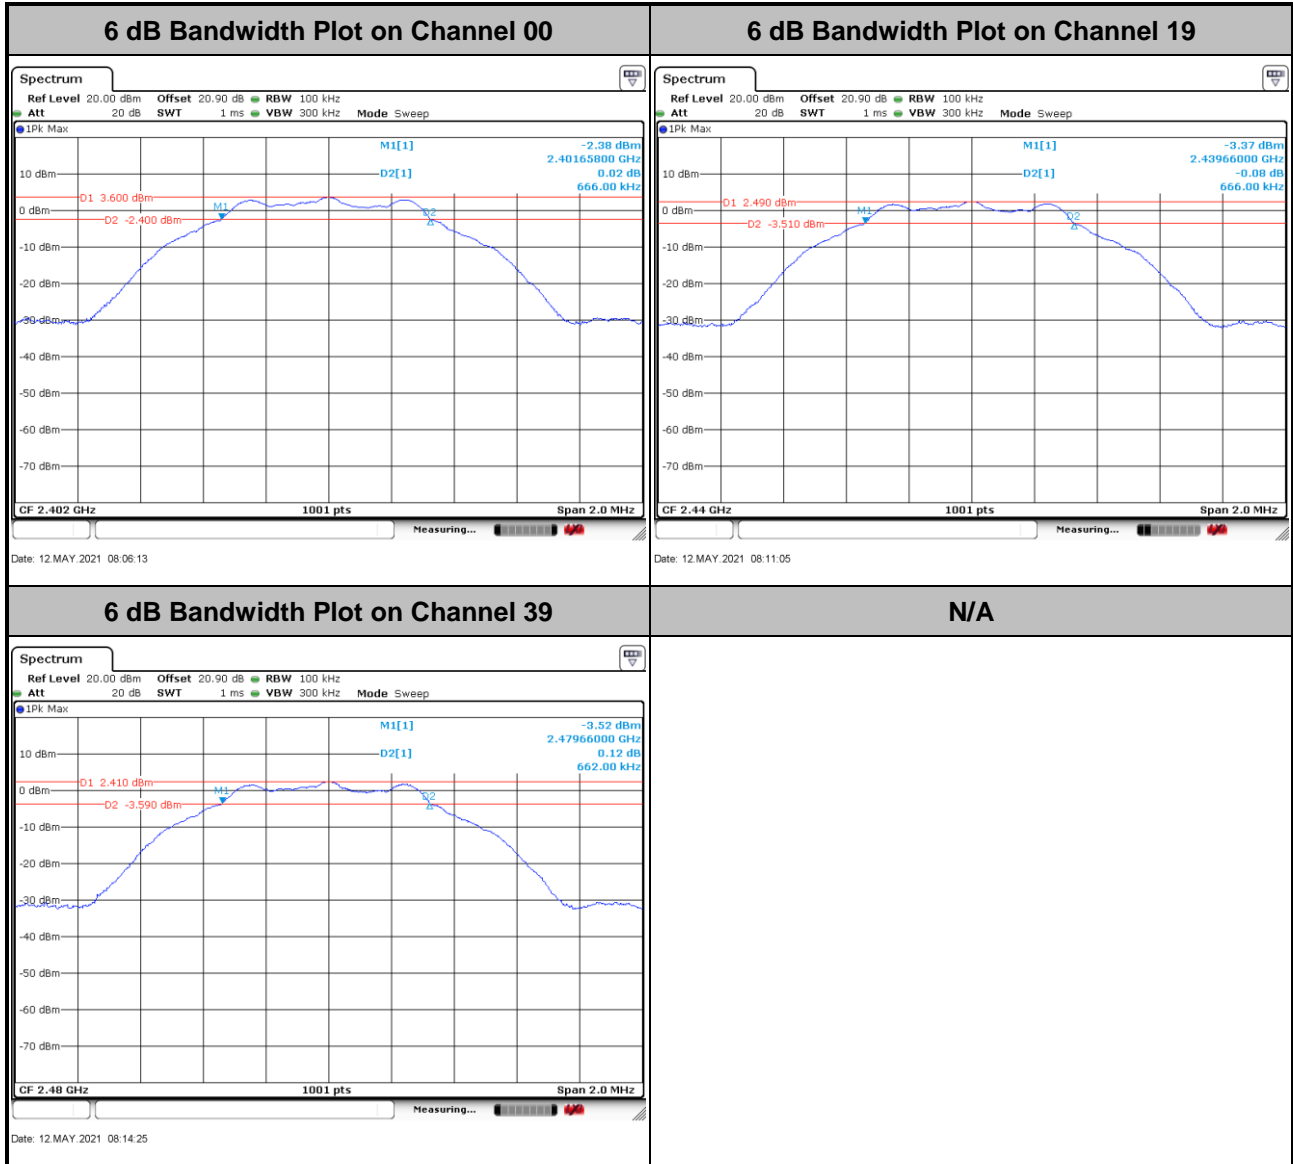



<2Mbps>

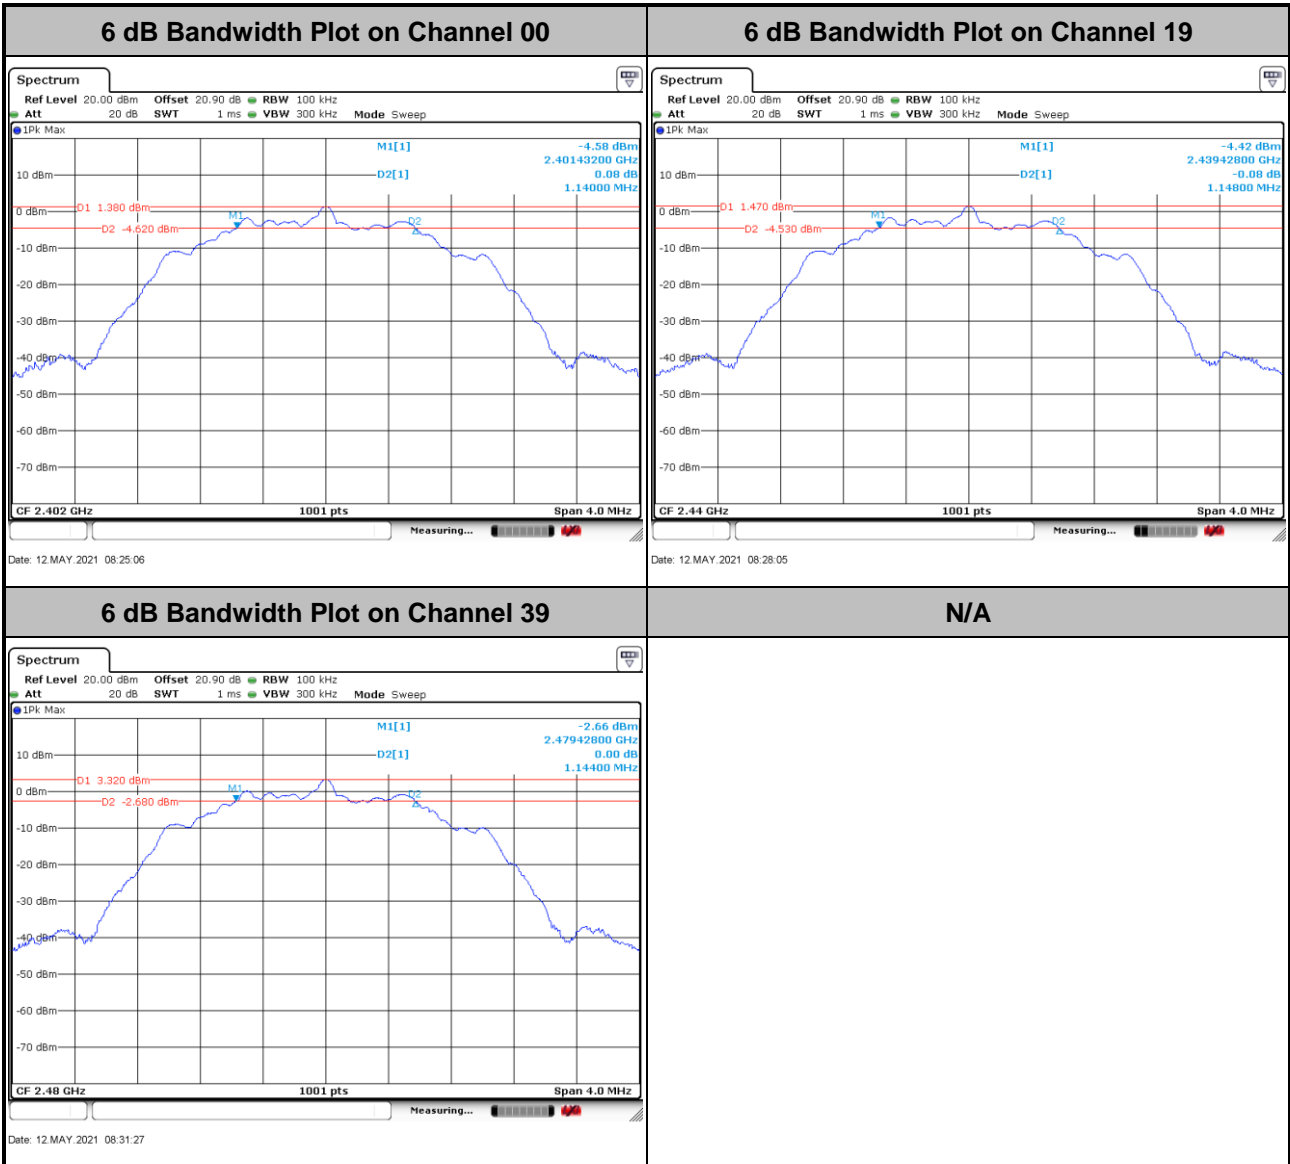




3.1.6 Test Result of 99% Occupied Bandwidth

Please refer to Appendix A.


<1Mbps>

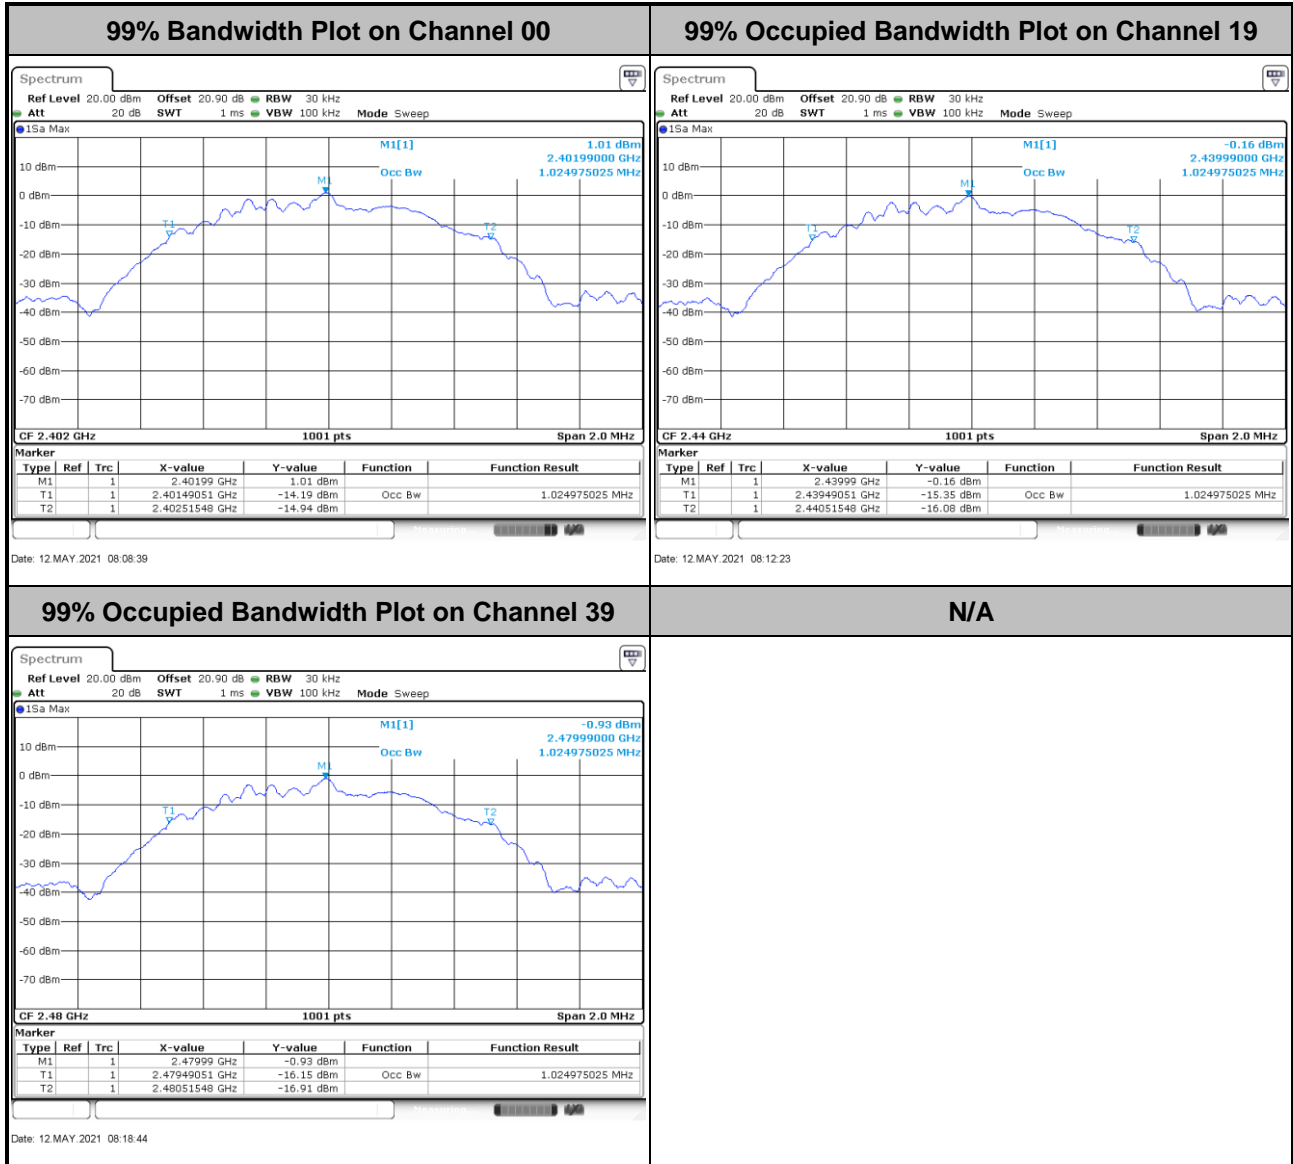

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.



<2Mbps>

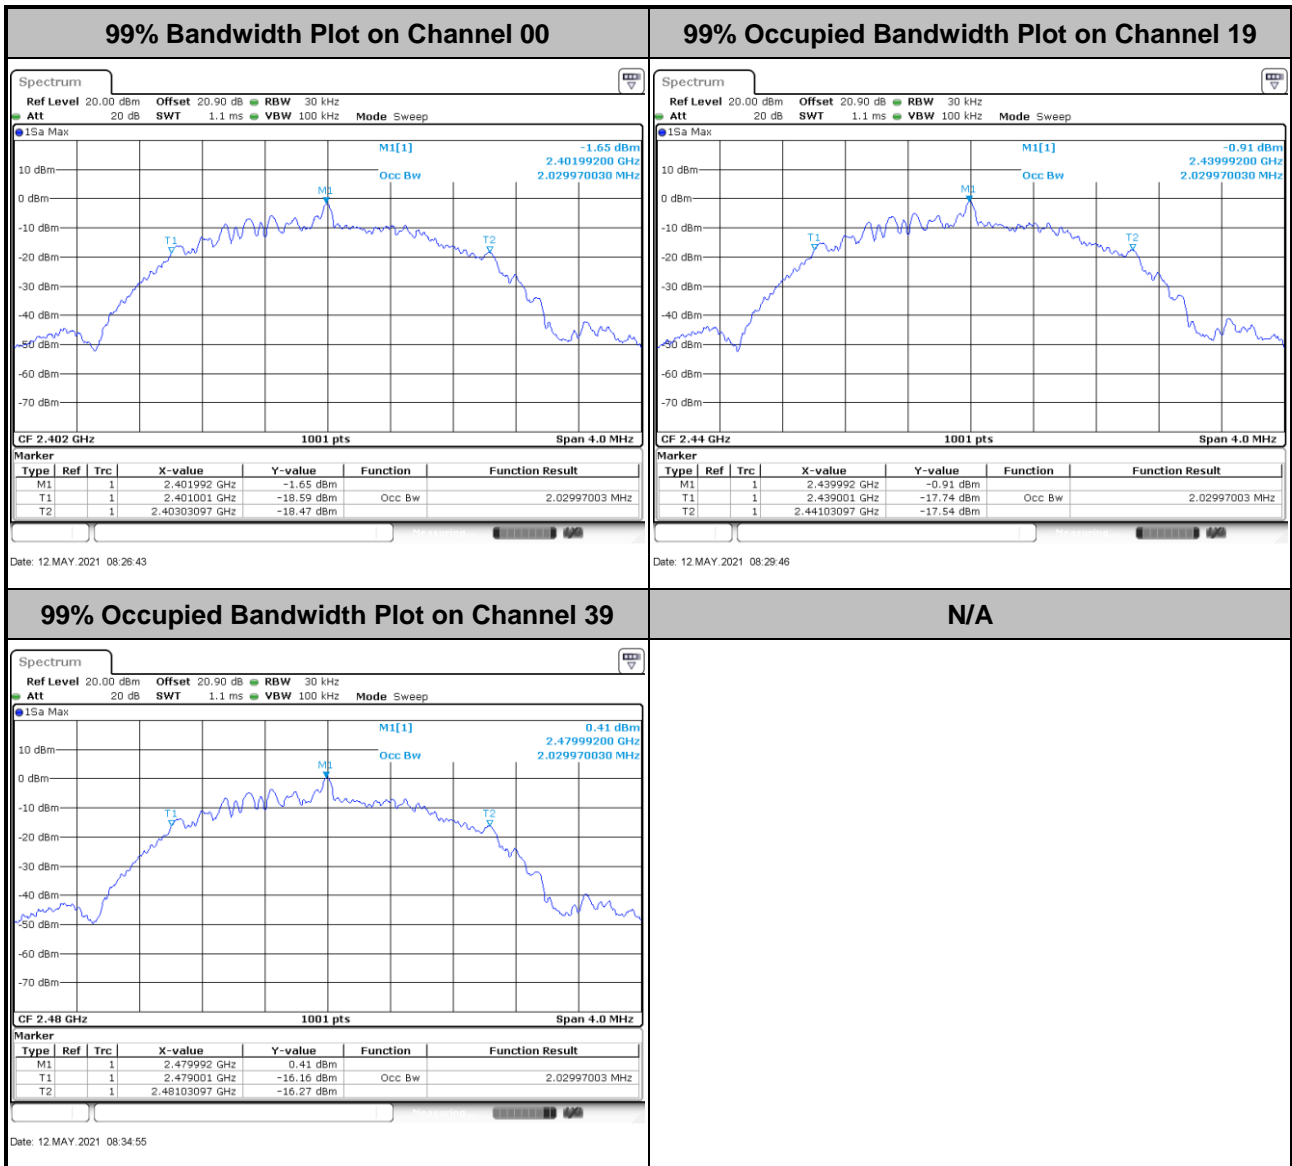

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

3.2 Output Power Measurement

3.2.1 Limit of Output Power

For systems using digital modulation in the 2400-2483.5 MHz, the limit for output power is 30 dBm. If transmitting antenna of directional gain greater than 6 dBi is used, the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.


3.2.2 Measuring Instruments

See list of measuring equipment of this test report.

3.2.3 Test Procedures

1. For Average Power, the testing follows ANSI C63.10 Section 11.9.2.3.2 Method AVGPM-G
2. The RF output of EUT was connected to the power meter by RF cable and attenuator.
3. The path loss was compensated to the results for each measurement.
4. Set the maximum power setting and enable the EUT to transmit continuously.
5. Measure the conducted output power and record the results in the test report.

3.2.4 Test Setup

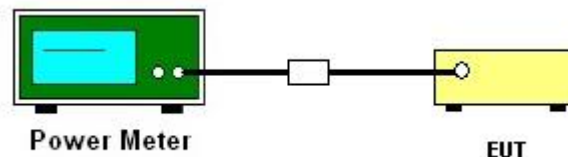

3.2.5 Test Result of Average Output Power

Please refer to Appendix A.

3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8 dBm in any 3 kHz band at any time interval of continuous transmission.


3.3.2 Measuring Instruments

See list of measuring equipment of this test report.

3.3.3 Test Procedures

1. The testing follows the ANSI C63.10 Section 11.10.2 Method PKPSD.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth VBW = 10 kHz. In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6dB BW)
5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
6. Measure and record the results in the test report.
7. The Measured power density (dBm)/ 100 kHz is a reference level and is used as 20 dBc down limit line for Conducted Band Edges and Conducted Spurious Emission.

3.3.4 Test Setup

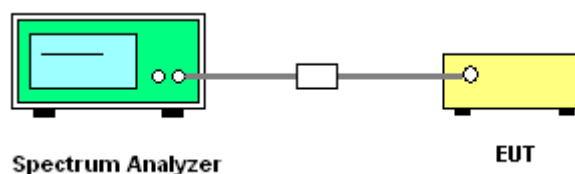


3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.




3.3.6 Test Result of Power Spectral Density Plots (100kHz)

<1Mbps>

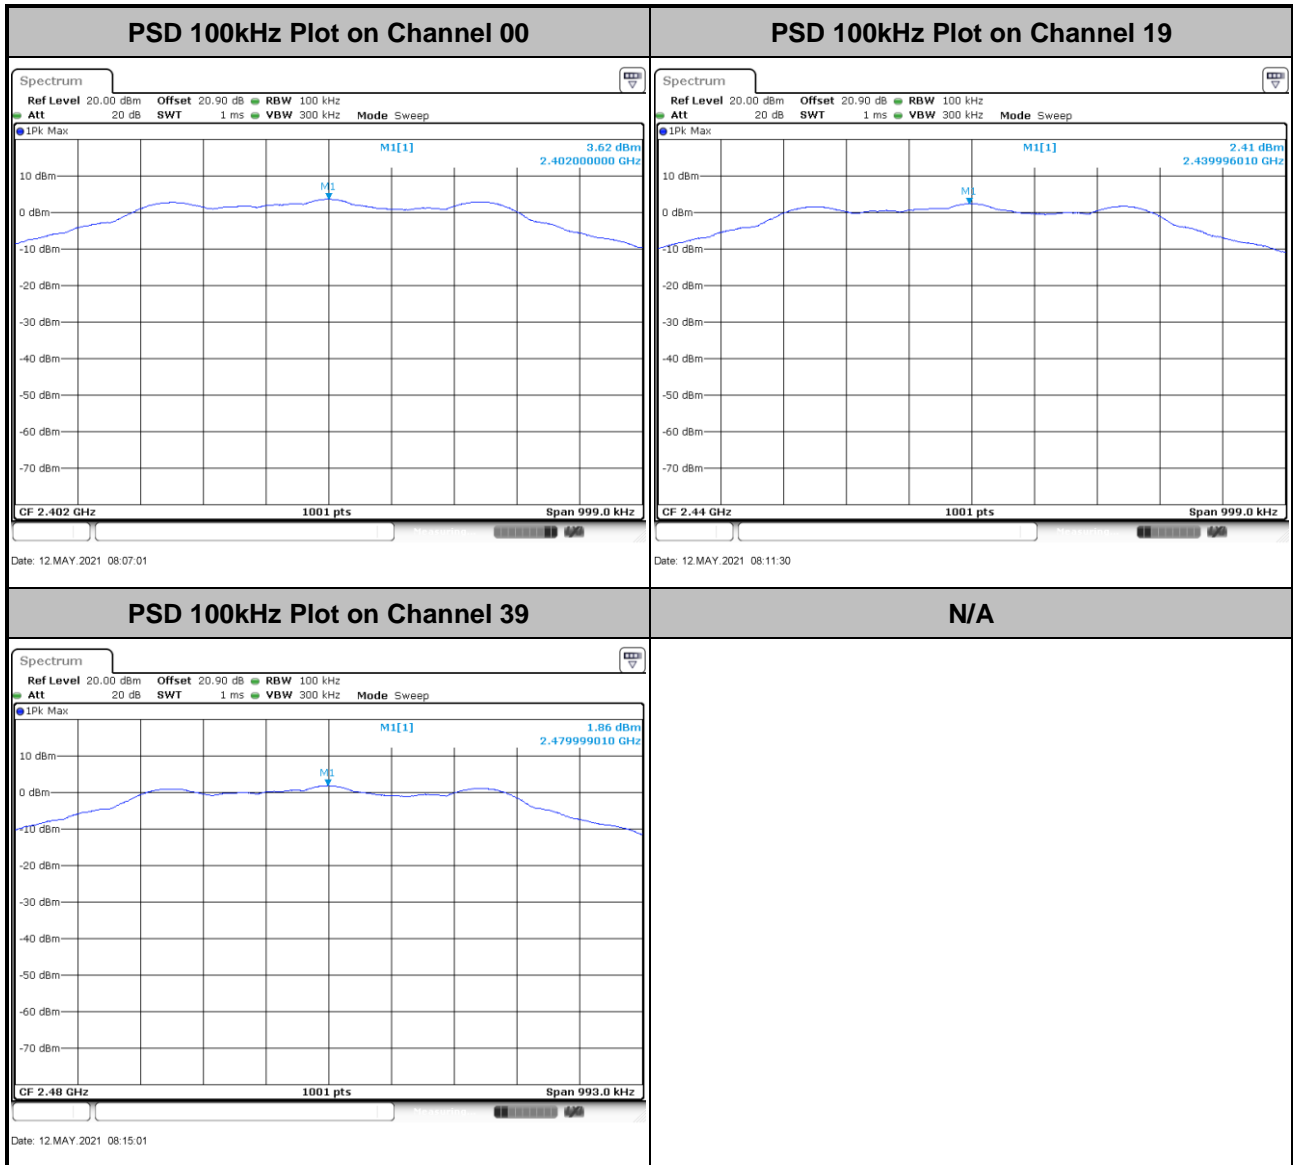




<2Mbps>

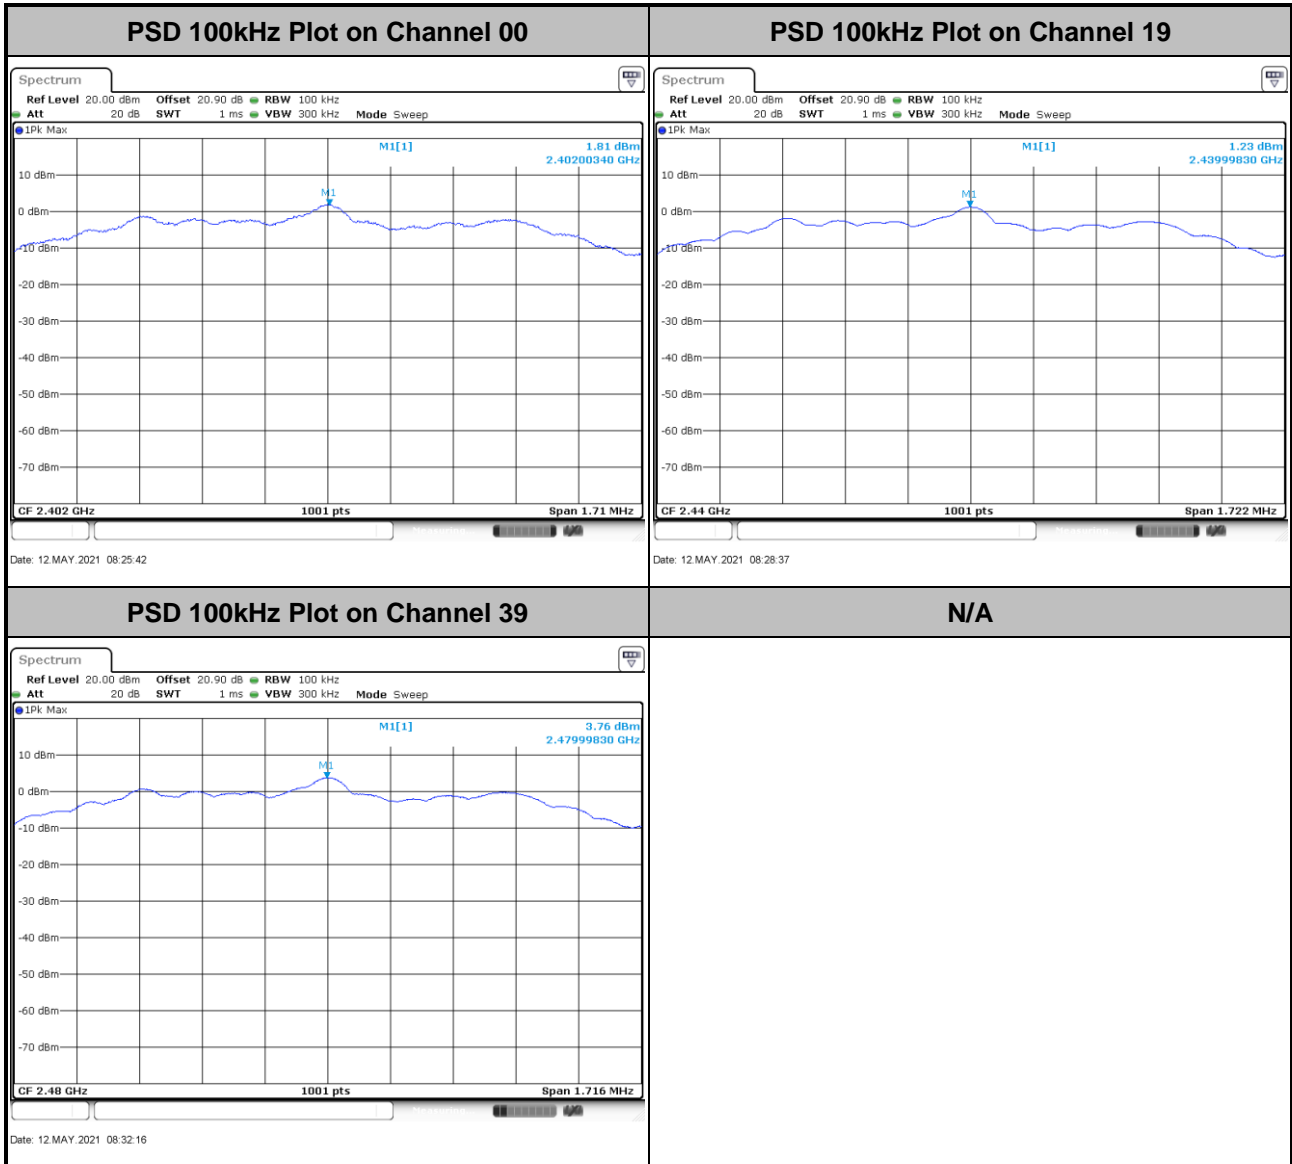




3.3.7 Test Result of Power Spectral Density Plots (3kHz)

<1Mbps>

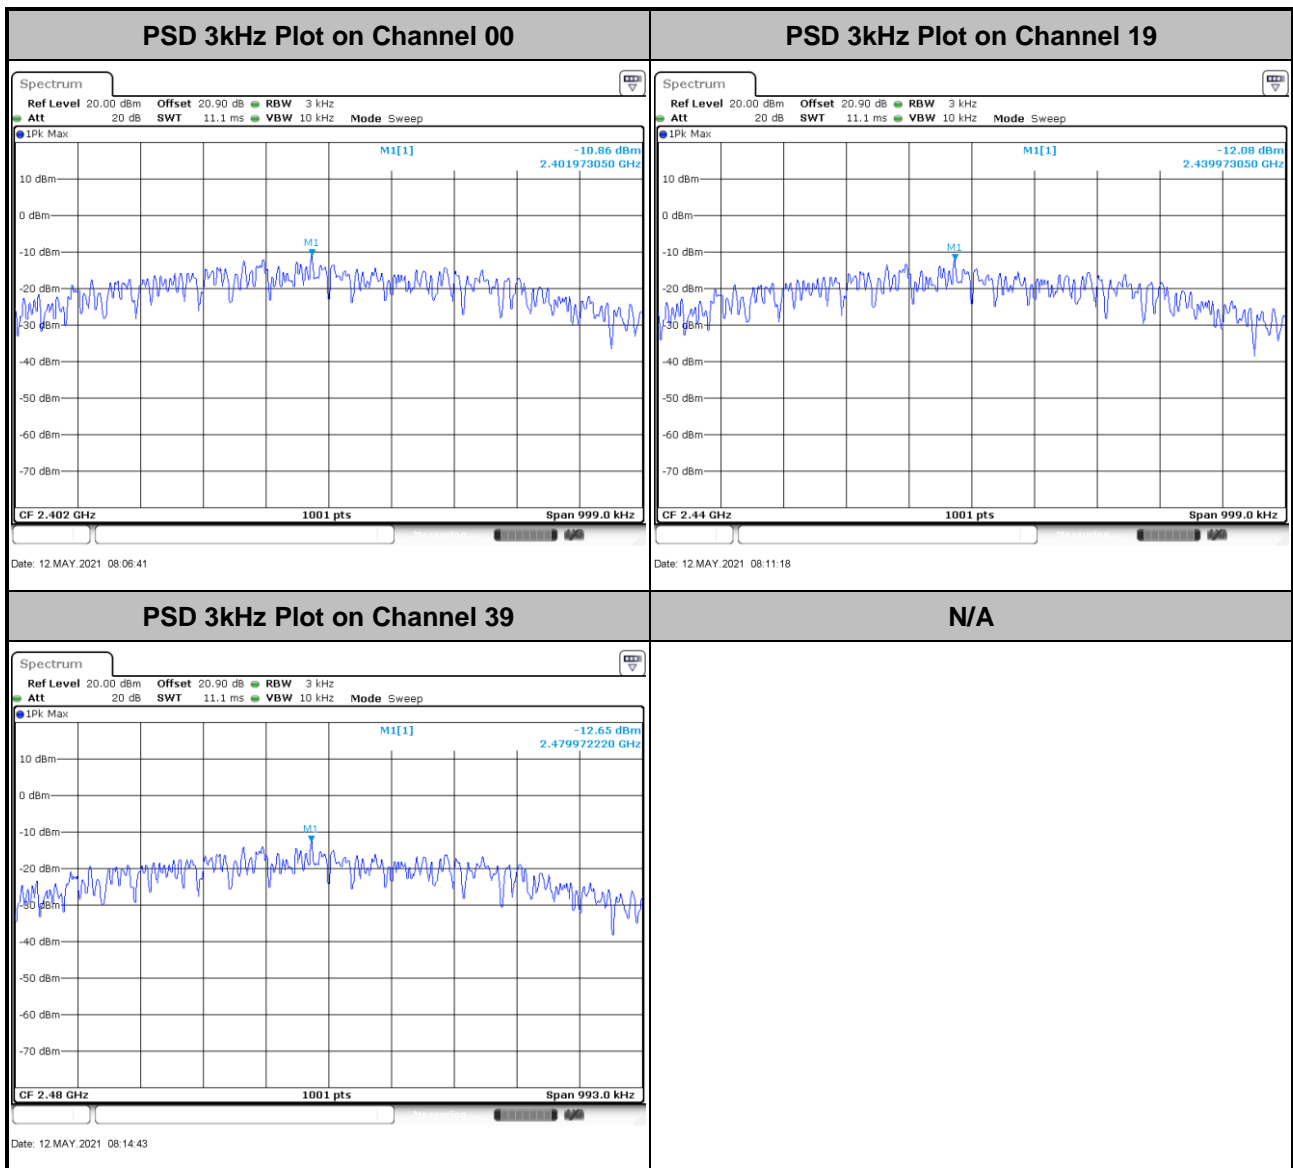



<2Mbps>

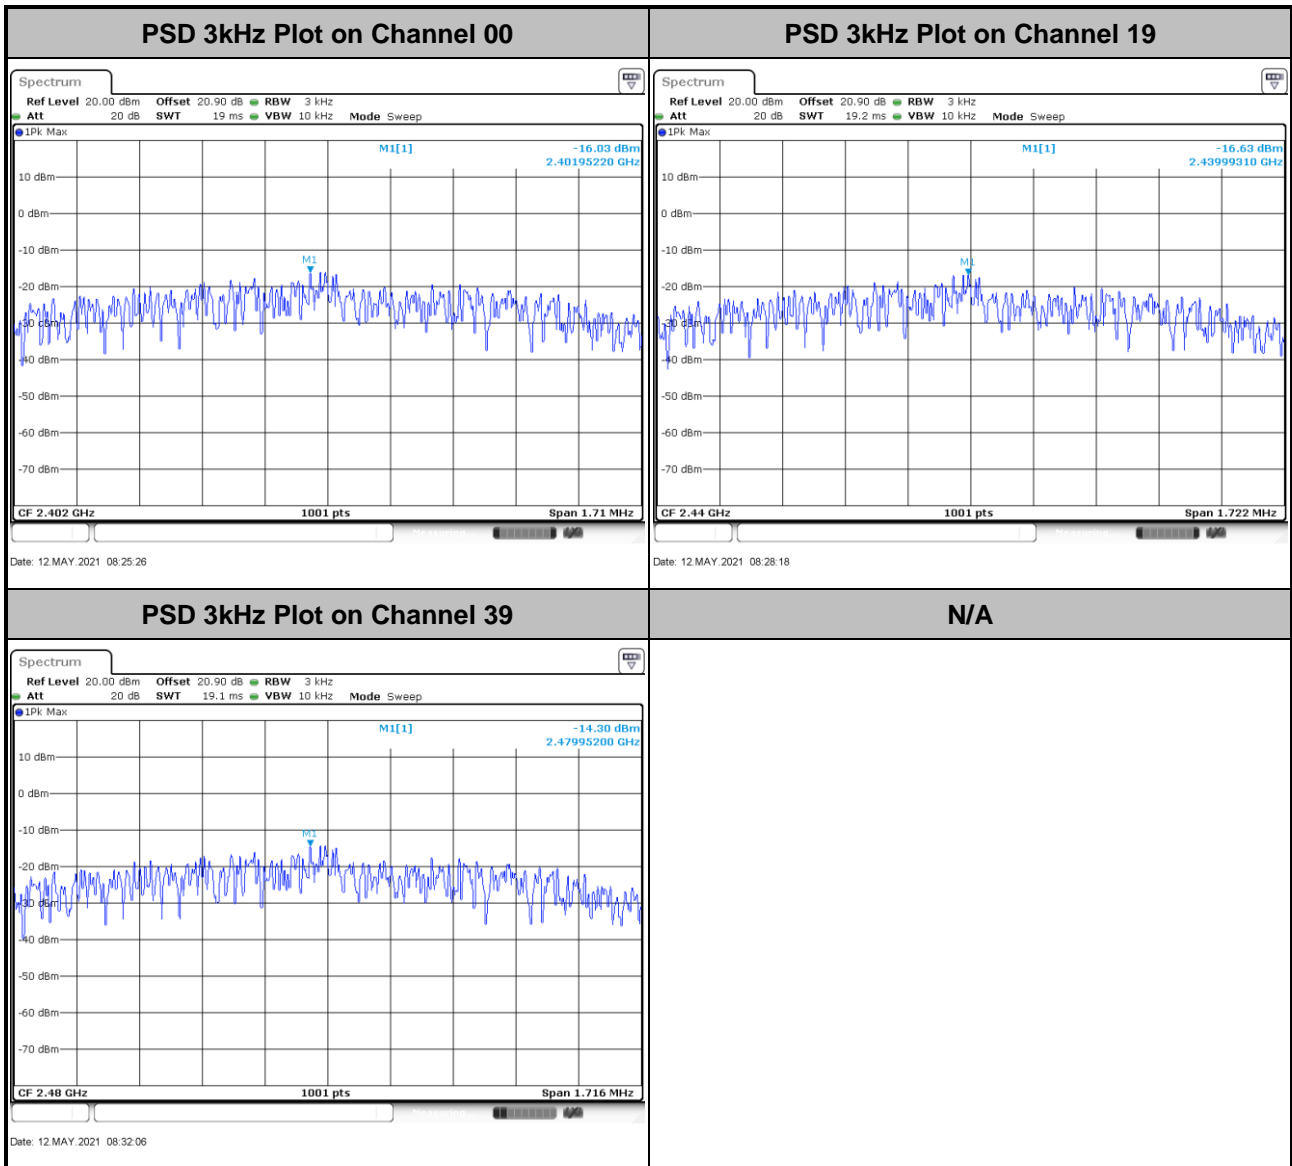

3.4 Conducted Band Edges and Spurious Emission Measurement

3.4.1 Limit of Conducted Band Edges and Spurious Emission

All harmonics/spurious must be at least 20 dB down from the highest emission level within the authorized band.


3.4.2 Measuring Instruments

See list of measuring equipment of this test report.

3.4.3 Test Procedure

1. The testing follows the ANSI C63.10 Section 11.11.3 Emission level measurement.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Set RBW = 100 kHz, VBW = 300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.


3.4.4 Test Setup

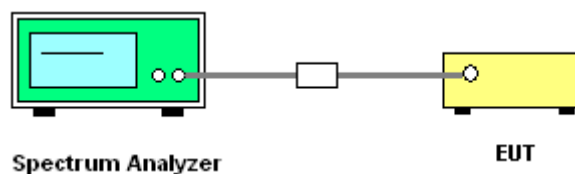




3.4.5 Test Result of Conducted Band Edges Plots

<1Mbps>

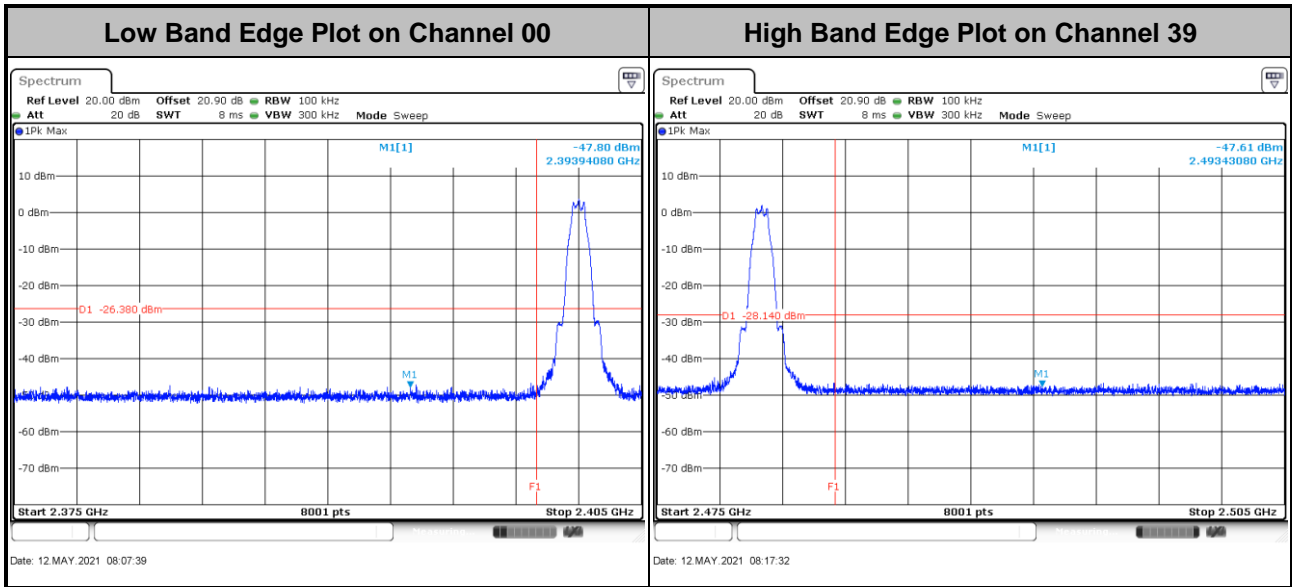




<2Mbps>

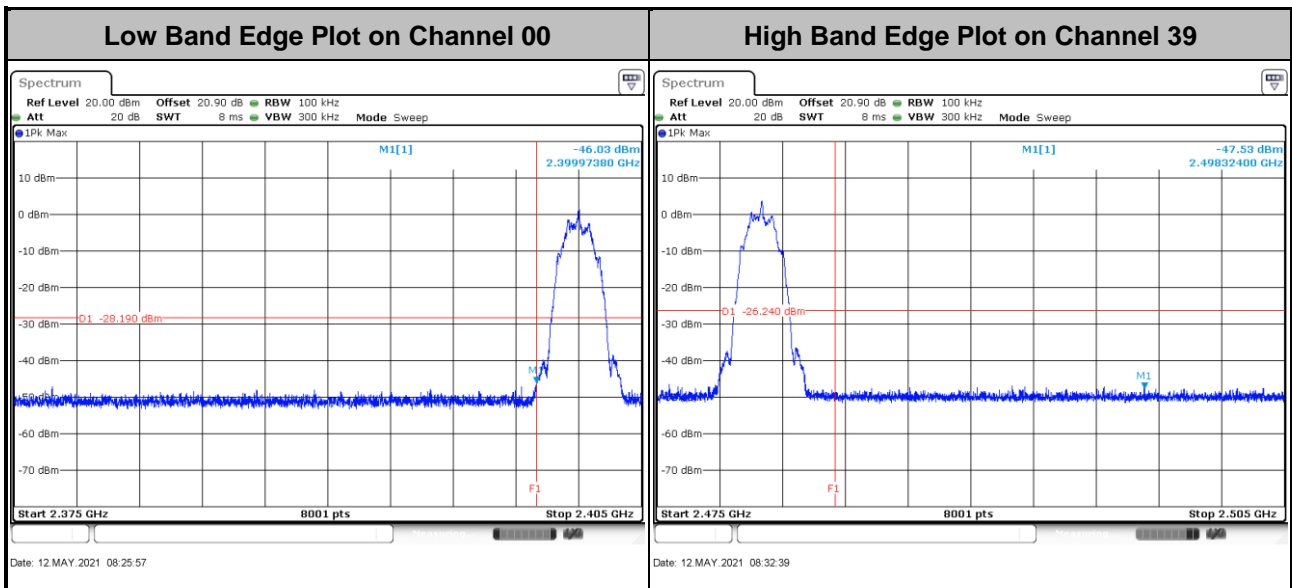




3.4.6 Test Result of Conducted Spurious Emission Plots

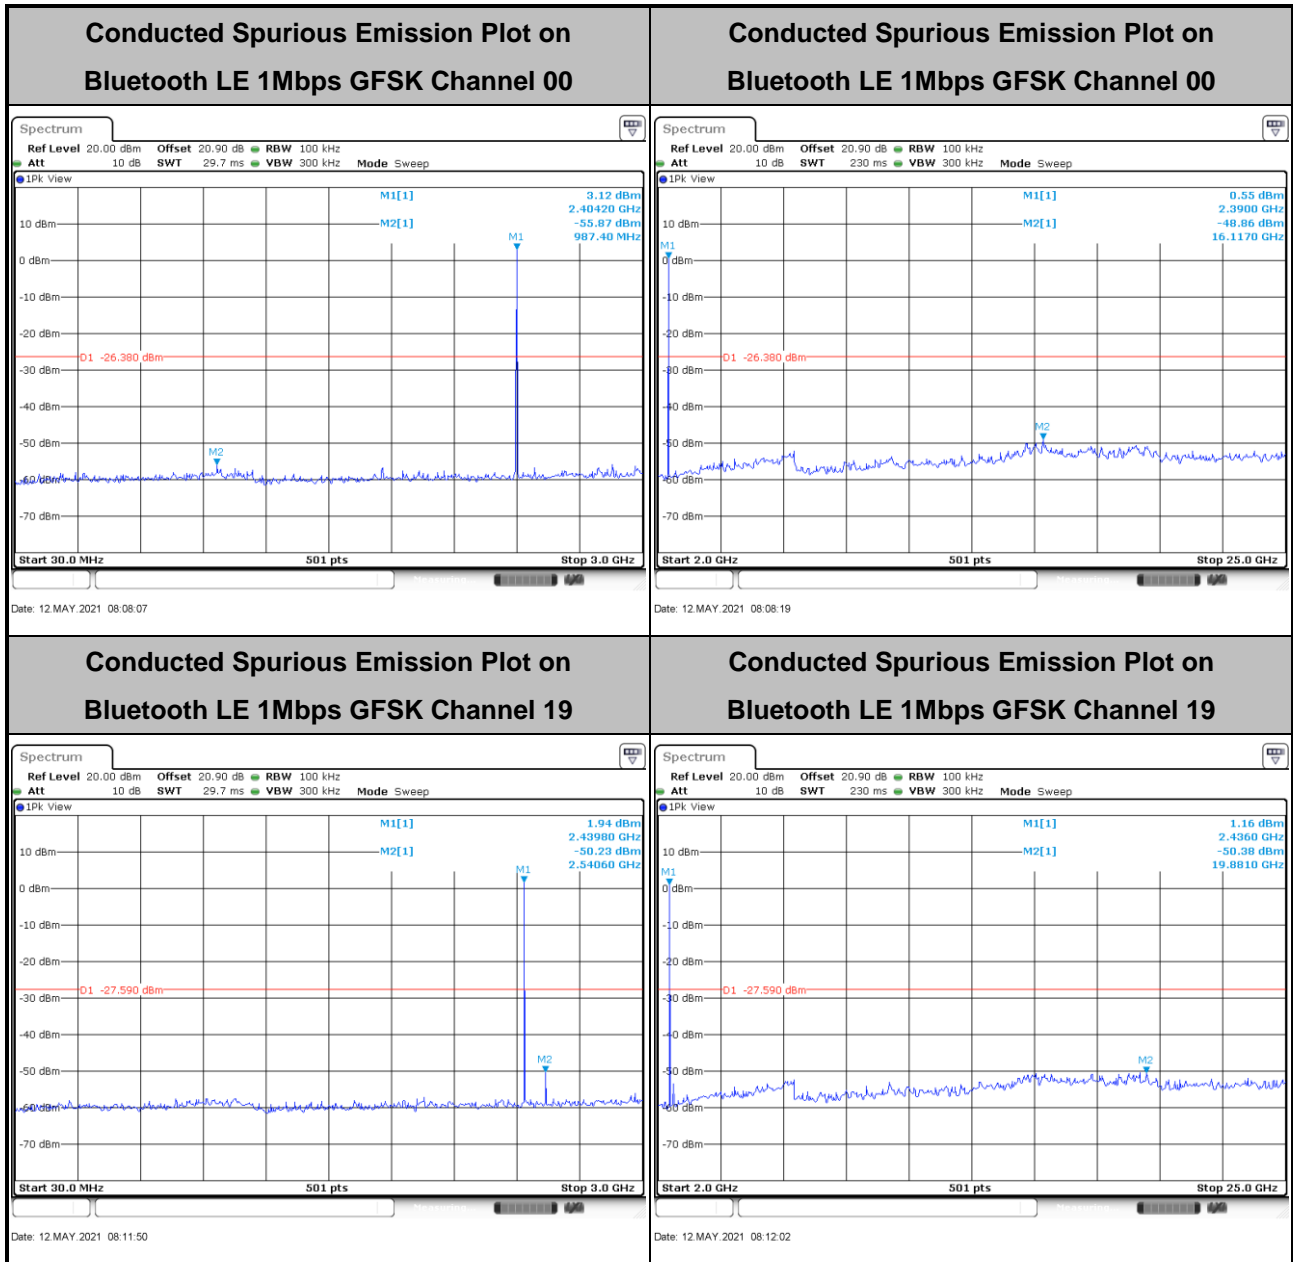

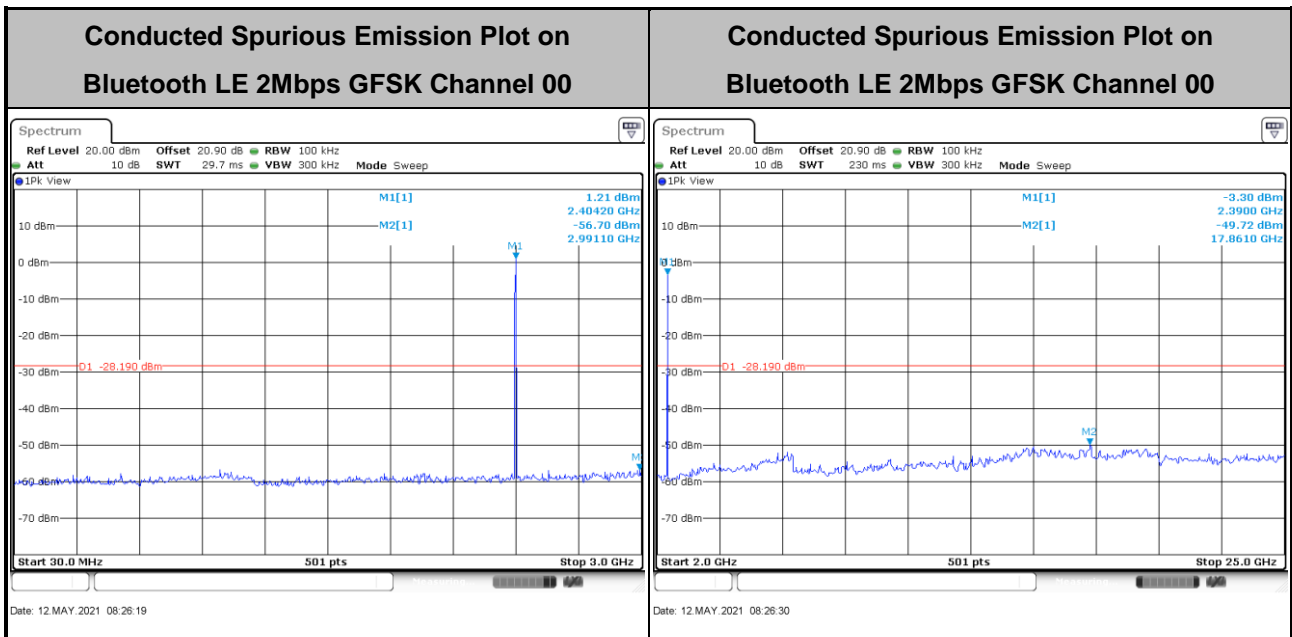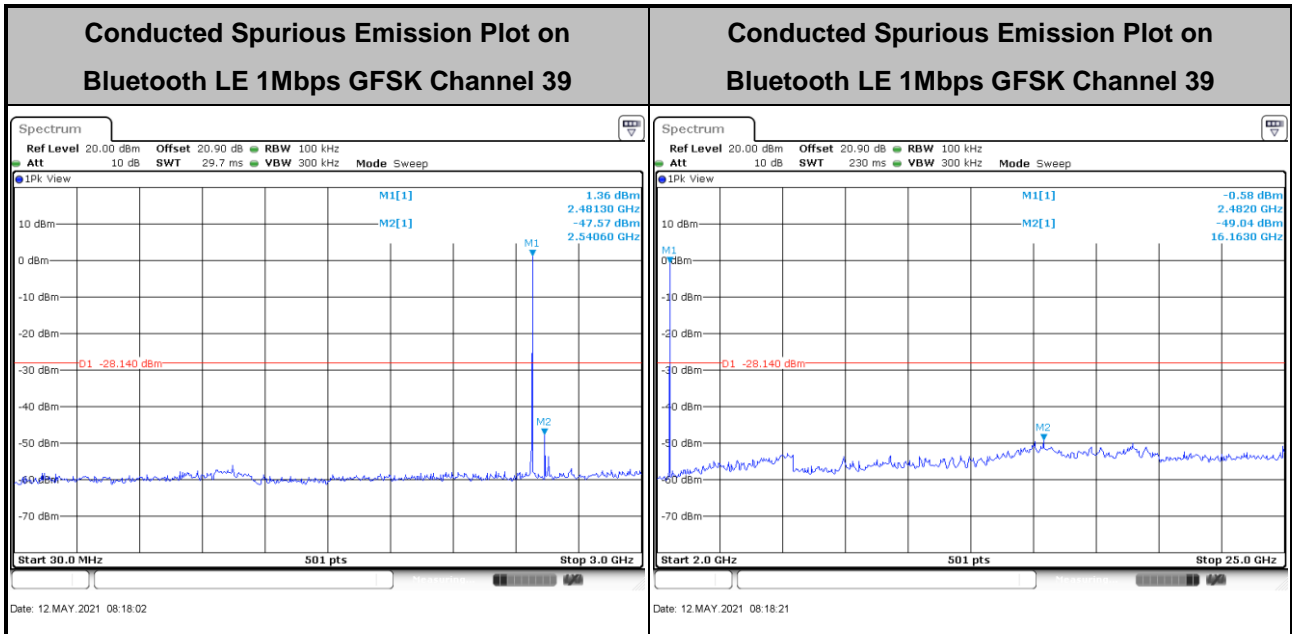




Conducted Spurious Emission Plot on Bluetooth LE 2Mbps GFSK Channel 19

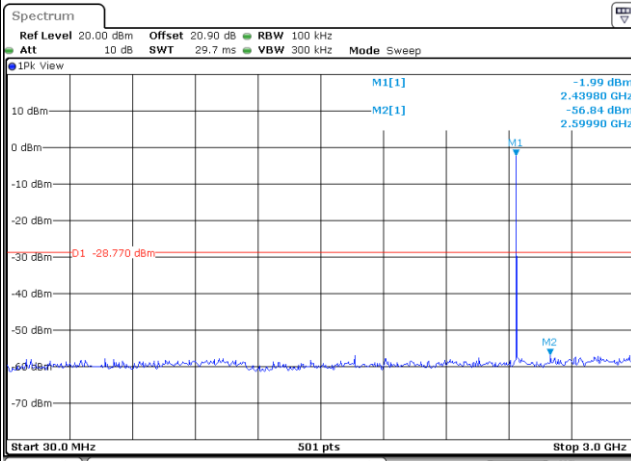


Date: 12.MAY.2021 08:29:09

Conducted Spurious Emission Plot on Bluetooth LE 2Mbps GFSK Channel 19

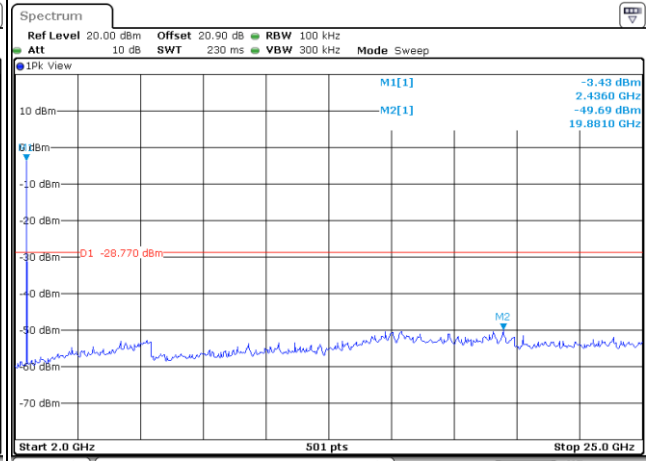


Date: 12.MAY.2021 08:29:29

Conducted Spurious Emission Plot on Bluetooth LE 2Mbps GFSK Channel 39

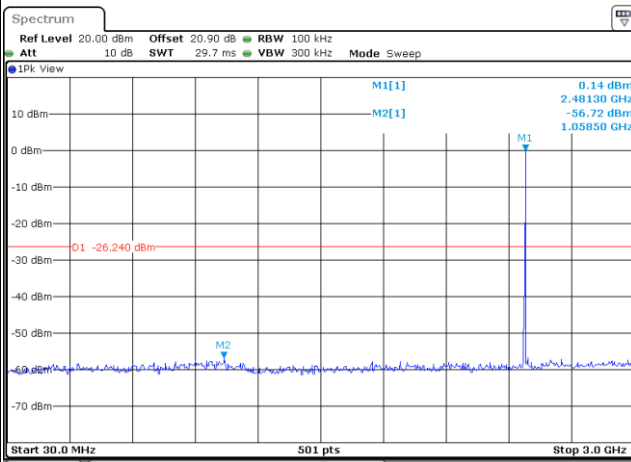

Date: 12.MAY.2021 08:33:11

Conducted Spurious Emission Plot on Bluetooth LE 2Mbps GFSK Channel 39

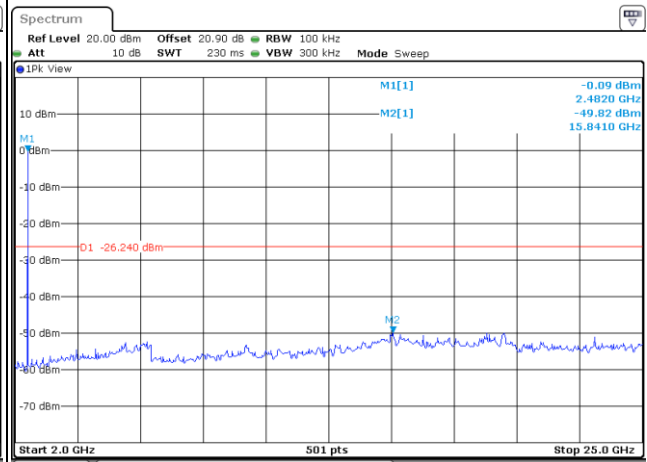

Date: 12.MAY.2021 08:33:30



3.5 Radiated Band Edges and Spurious Emission Measurement

3.5.1 Limit of Radiated Band Edges and Spurious Emission

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device was measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.5.2 Measuring Instruments

See list of measuring equipment of this test report.




3.5.3 Test Procedures


1. The testing follows the ANSI C63.10 Section 11.12.1 Radiated emission measurements.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT was placed on a turntable with 0.8 meter for frequency below 1 GHz and 1.5 meter for frequency above 1 GHz respectively above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. For testing below 1 GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and be reported.
7. For testing above 1 GHz, the emission level of the EUT in peak mode was 20 dB lower than average limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and be reported.
8. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW = 100 kHz for $f < 1$ GHz; VBW \geq RBW; Sweep = auto; Detector function = peak; Trace = max hold;
 - (3) Set RBW = 1 MHz, VBW = 3 MHz for $f \geq 1$ GHz for peak measurement.
For average measurement:
 - VBW = 10 Hz, when duty cycle is no less than 98 percent.
 - VBW $\geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

3.5.4 Test Setup


For radiated test below 30MHz

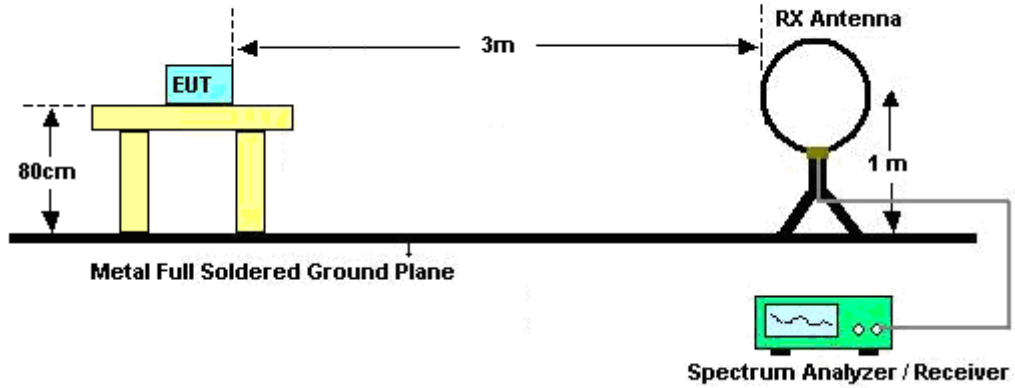


For radiated test from 30MHz to 1GHz

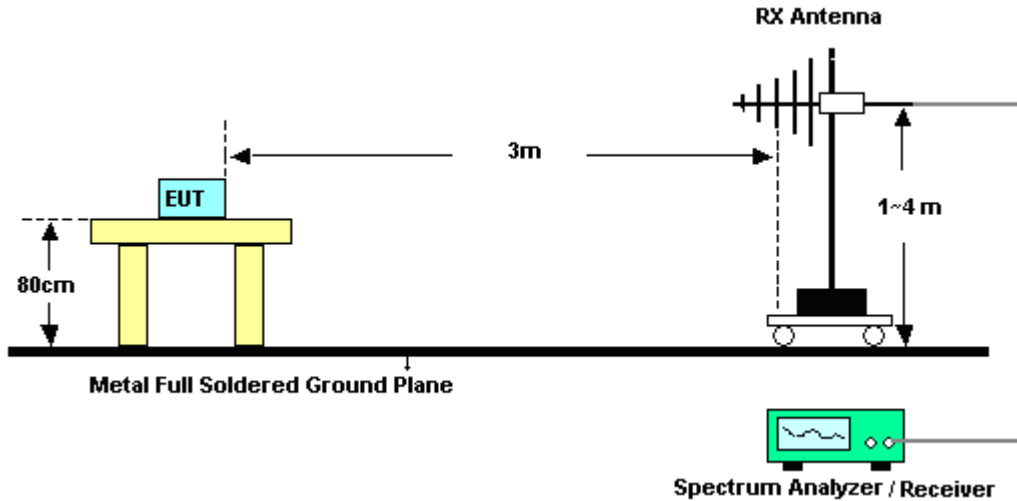

For radiated test from 1GHz to 18GHz

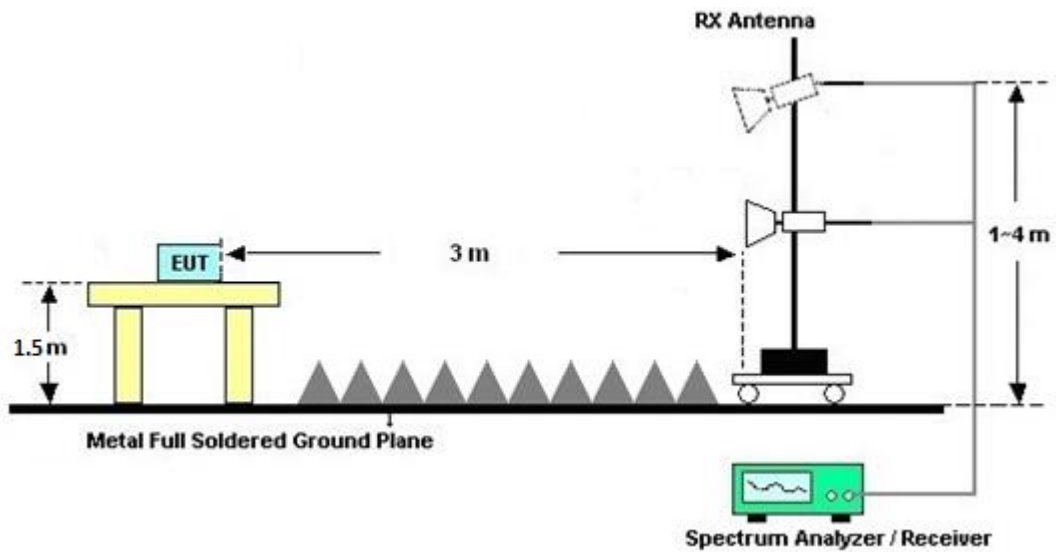

For radiated test above 18GHz

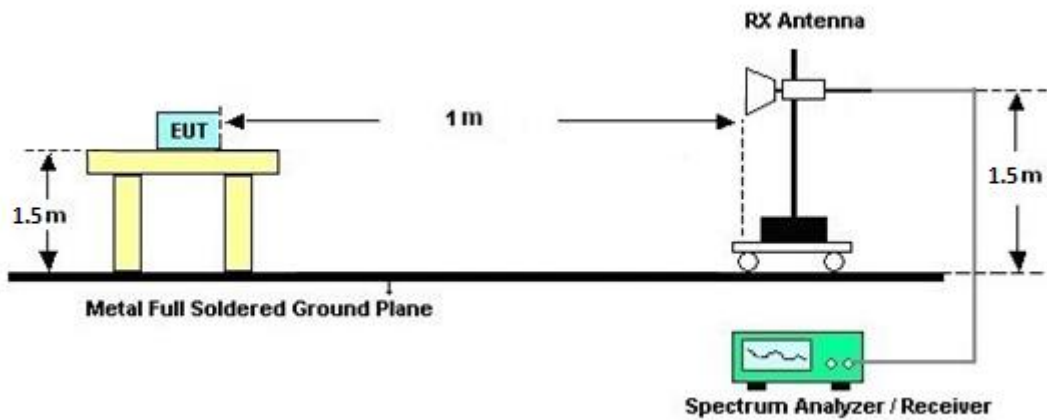

3.5.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and alternative test site - semi-Anechoic chamber according to 414788 D01 Radiated Test Site v01r01, and the result came out very similar.

3.5.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix C and D.

3.5.7 Duty Cycle

Please refer to Appendix E.

3.5.8 Test Result of Radiated Spurious Emission (30 MHz ~ 10th Harmonic)

Please refer to Appendix C and D.



3.6 AC Conducted Emission Measurement

3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.

3.6.2 Measuring Instruments

See list of measuring equipment of this test report.

3.6.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN shall be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.

3.6.4 Test Setup



3.6.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



3.7 Antenna Requirements

3.7.1 Standard Applicable

If directional gain of transmitting antennas is greater than 6 dBi, the power shall be reduced by the same level in dB comparing to gain minus 6 dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

3.7.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.7.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



4 List of Measuring Equipment

Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100315	9 kHz~30 MHz	Jan. 04, 2021	May 07, 2021~ May 19, 2021	Jan. 03, 2022	Radiation (03CH11-HY)
Bilog Antenna	TESEQ	CBL 6111D & N-6-06	35414 & AT-N0602	30MHz~1GHz	Oct. 11, 2020	May 07, 2021~ May 19, 2021	Oct. 10, 2021	Radiation (03CH11-HY)
Horn Antenna	SCHWARZBE CK	BBHA 9120 D	9120D-132 6	1GHz ~ 18GHz	Nov. 03, 2020	May 07, 2021~ May 19, 2021	Nov. 02, 2021	Radiation (03CH11-HY)
SHF-EHF Horn Antenna	SCHWARZBE CK	BBHA9170	00994	18GHz~40GHz	Nov. 19, 2020	May 07, 2021~ May 19, 2021	Nov. 18, 2021	Radiation (03CH11-HY)
Amplifier	SONOMA	310N	187312	9kHz~1GHz	Dec. 02, 2020	May 07, 2021~ May 19, 2021	Dec. 01, 2021	Radiation (03CH11-HY)
Preamplifier	EMEC	EM1G18G	060812	1GHz~18GHz	Oct. 27, 2020	May 07, 2021~ May 19, 2021	Oct. 26, 2021	Radiation (03CH11-HY)
Preamplifier	Keysight	83017A	MY532700 80	1GHz~26.5GHz	Nov. 12, 2020	May 07, 2021~ May 19, 2021	Nov. 11, 2021	Radiation (03CH11-HY)
Preamplifier	EMEC	EM18G40G	060801	18GHz~40GHz	Jun. 15, 2020	May 07, 2021~ May 19, 2021	Jun. 14, 2021	Radiation (03CH11-HY)
Spectrum Analyzer	Keysight	N9010A	MY542004 86	10Hz~44GHz	Oct. 23, 2020	May 07, 2021~ May 19, 2021	Oct. 22, 2021	Radiation (03CH11-HY)
Antenna Mast	EMEC	AM-BS-4500- B	N/A	1~4m	N/A	May 07, 2021~ May 19, 2021	N/A	Radiation (03CH11-HY)
Turn Table	EMEC	TT 2000	N/A	0~360 Degree	N/A	May 07, 2021~ May 19, 2021	N/A	Radiation (03CH11-HY)
Software	Audix	E3 6.2009-8-24	RK-00105 3	N/A	N/A	May 07, 2021~ May 19, 2021	N/A	Radiation (03CH11-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY9837/4 PE	9kHz-30MHz	Mar. 11, 2021	May 07, 2021~ May 19, 2021	Mar. 10, 2022	Radiation (03CH11-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	MY2859/2	30MHz-40GHz	Mar. 11, 2021	May 07, 2021~ May 19, 2021	Mar. 10, 2022	Radiation (03CH11-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY9837/4 PE	30M-18G	Mar. 11, 2021	May 07, 2021~ May 19, 2021	Mar. 10, 2022	Radiation (03CH11-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	MY4274/2	30MHz-40GHz	Mar. 11, 2021	May 07, 2021~ May 19, 2021	Mar. 10, 2022	Radiation (03CH11-HY)
Filter	Wainwright	WLK4-1000-1 530-8000-40S S	SN11	1.53G Low Pass	Sep. 14, 2020	May 07, 2021~ May 19, 2021	Sep. 13, 2021	Radiation (03CH11-HY)
Filter	Wainwright	WHKX12-270 0-3000-18000 -60SS	SN3	3GHz High Pass Filter	Sep. 14, 2020	May 07, 2021~ May 19, 2021	Sep. 13, 2021	Radiation (03CH11-HY)



Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
AC Power Source	ChainTek	APC-1000W	N/A	N/A	N/A	May 05, 2021	N/A	Conduction (CO05-HY)
EMI Test Receiver	Rohde & Schwarz	ESR3	102388	9kHz~3.6GHz	Nov. 30, 2020	May 05, 2021	Nov. 29, 2021	Conduction (CO05-HY)
LISN	Rohde & Schwarz	ENV216	100081	9kHz~30MHz	Nov. 16, 2020	May 05, 2021	Nov. 15, 2021	Conduction (CO05-HY)
Software	Rohde & Schwarz	EMC32 V10.30	N/A	N/A	N/A	May 05, 2021	N/A	Conduction (CO05-HY)
Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100851	N/A	Feb. 25, 2021	May 05, 2021	Feb. 24, 2022	Conduction (CO05-HY)
LISN Cable	MVE	RG-400	260260	N/A	Dec. 31, 2020	May 05, 2021	Dec. 30, 2021	Conduction (CO05-HY)
Power Sensor	DARE	RPR3006W	16I00054S NO12	10MHz~6GHz	Dec. 16, 2020	May 06, 2021~ May 13, 2021	Dec. 15, 2021	Conducted (TH02-HY)
Signal Analyzer	Rohde & Schwarz	FSV40	101566	10Hz ~ 40GHz	Jul. 22, 2020	May 06, 2021~ May 13, 2021	Jul. 21, 2021	Conducted (TH02-HY)
Switch Box & RF Cable	EM Electronics	EMSW18SE	SW200302	N/A	Mar. 17, 2021	May 06, 2021~ May 13, 2021	Mar. 16, 2022	Conducted (TH02-HY)



5 Uncertainty of Evaluation

Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.3
---	-----

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.4
---	-----

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.2
---	-----

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.1
---	-----

Appendix A. Test Result of Conducted Test Items

Test Engineer:	Luffy Lin	Temperature:	21~25	°C
Test Date:	2021/05/06 ~ 2021/05/13	Relative Humidity:	51~54	%

TEST RESULTS DATA
6dB and 99% Occupied Bandwidth

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Occupied BW (MHz)	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail
BLE	1Mbps	1	0	2402	1.025	0.666	0.50	Pass
BLE	1Mbps	1	19	2440	1.025	0.666	0.50	Pass
BLE	1Mbps	1	39	2480	1.025	0.662	0.50	Pass

TEST RESULTS DATA
Average Power Table

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Average Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
BLE	1Mbps	1	0	2402	4.40	30.00	3.53	7.93	36.00	Pass
BLE	1Mbps	1	19	2440	4.50	30.00	3.53	8.03	36.00	Pass
BLE	1Mbps	1	39	2480	4.60	30.00	3.53	8.13	36.00	Pass

TEST RESULTS DATA
Peak Power Density

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak PSD (dBm /100kHz)	Peak PSD (dBm /3kHz)	DG (dBi)	Peak PSD Limit (dBm /3kHz)	Pass/Fail
BLE	1Mbps	1	0	2402	3.62	-10.86	3.53	8.00	Pass
BLE	1Mbps	1	19	2440	2.41	-12.08	3.53	8.00	Pass
BLE	1Mbps	1	39	2480	1.86	-12.65	3.53	8.00	Pass

Note: PSD (dBm/ 100kHz) is a reference level used for Conducted Band Edges and Conducted Spurious Emission 30dBc limit.

TEST RESULTS DATA
6dB and 99% Occupied Bandwidth

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Occupied BW (MHz)	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail
BLE	2Mbps	1	0	2402	2.030	1.140	0.50	Pass
BLE	2Mbps	1	19	2440	2.030	1.148	0.50	Pass
BLE	2Mbps	1	39	2480	2.030	1.144	0.50	Pass

TEST RESULTS DATA
Average Power Table

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Average Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
BLE	2Mbps	1	0	2402	4.30	30.00	3.53	7.83	36.00	Pass
BLE	2Mbps	1	19	2440	4.40	30.00	3.53	7.93	36.00	Pass
BLE	2Mbps	1	39	2480	4.50	30.00	3.53	8.03	36.00	Pass

TEST RESULTS DATA
Peak Power Density

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak PSD (dBm /100kHz)	Peak PSD (dBm /3kHz)	DG (dBi)	Peak PSD Limit (dBm /3kHz)	Pass/Fail
BLE	2Mbps	1	0	2402	1.81	-16.03	3.53	8.00	Pass
BLE	2Mbps	1	19	2440	1.23	-16.63	3.53	8.00	Pass
BLE	2Mbps	1	39	2480	3.76	-14.30	3.53	8.00	Pass

Note: PSD (dBm/ 100kHz) is a reference level used for Conducted Band Edges and Conducted Spurious Emission 30dBc limit.




Appendix B. AC Conducted Emission Test Results

Test Engineer :	Tom Lee and Howard Huang	Temperature :	23~26°C
		Relative Humidity :	40~50%

EUT Information

Report NO : 131119-01
 Test Mode : Mode 1
 Test Voltage : 120Vac/60Hz
 Phase : Line

Full Spectrum

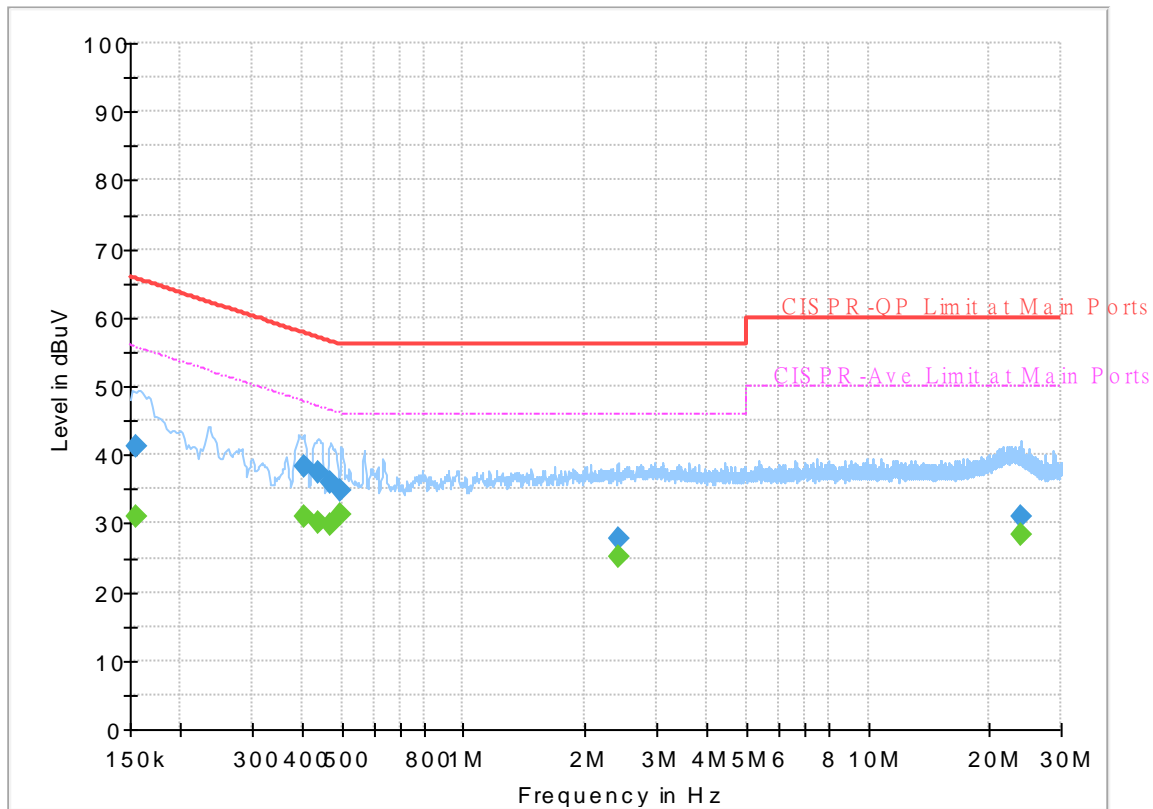


Final_Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.154500	---	31.07	55.75	24.68	L1	OFF	19.5
0.154500	41.13	---	65.75	24.62	L1	OFF	19.5
0.402000	---	30.88	47.81	16.93	L1	OFF	19.5
0.402000	38.23	---	57.81	19.58	L1	OFF	19.5
0.440250	---	30.18	47.06	16.88	L1	OFF	19.6
0.440250	37.31	---	57.06	19.75	L1	OFF	19.6
0.469500	---	29.93	46.52	16.59	L1	OFF	19.6
0.469500	35.93	---	56.52	20.59	L1	OFF	19.6
0.498750	---	31.16	46.02	14.86	L1	OFF	19.7
0.498750	34.74	---	56.02	21.28	L1	OFF	19.7
2.406750	---	25.21	46.00	20.79	L1	OFF	20.0
2.406750	27.65	---	56.00	28.35	L1	OFF	20.0
23.860500	---	28.34	50.00	21.66	L1	OFF	20.5
23.860500	31.03	---	60.00	28.97	L1	OFF	20.5

EUT Information

Report NO : 131119-01
 Test Mode : Mode 1
 Test Voltage : 120Vac/60Hz
 Phase : Neutral

Full Spectrum

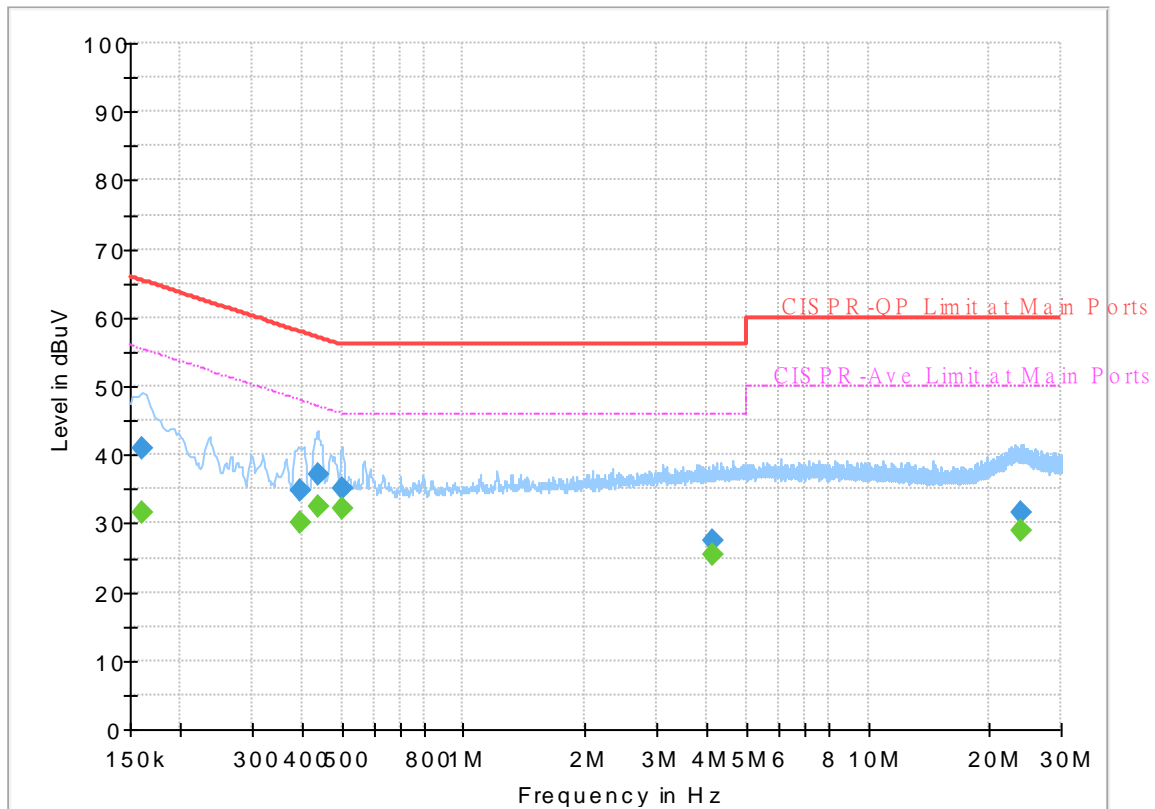

Final Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.161250	---	31.54	55.40	23.86	N	OFF	19.5
0.161250	40.85	---	65.40	24.55	N	OFF	19.5
0.395250	---	30.00	47.95	17.95	N	OFF	19.6
0.395250	34.74	---	57.95	23.21	N	OFF	19.6
0.435750	---	32.38	47.14	14.76	N	OFF	19.6
0.435750	37.09	---	57.14	20.05	N	OFF	19.6
0.501000	---	32.20	46.00	13.80	N	OFF	19.7
0.501000	35.20	---	56.00	20.80	N	OFF	19.7
4.123500	---	25.57	46.00	20.43	N	OFF	19.9
4.123500	27.35	---	56.00	28.65	N	OFF	19.9
23.905500	---	28.93	50.00	21.07	N	OFF	20.7
23.905500	31.63	---	60.00	28.37	N	OFF	20.7



Appendix C. Radiated Spurious Emission

Test Engineer :	Harvey Guo, Bill Chang, Fu Chen and Troye Hsieh	Temperature :	18.3~25.7°C
		Relative Humidity :	58.2~70.8%

<1Mbps>

2.4GHz 2400~2483.5MHz

BLE (Band Edge @ 3m)

BLE	Note	Frequency (MHz)	Level (dBµV/m)	Over Limit (dB)	Limit Line (dBµV/m)	Read Level (dBµV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)	
BLE CH 00 2402MHz		2360.295	53.39	-20.61	74	42.25	27.58	17.03	33.47	200	64	P	H	
		2338.035	43.72	-10.28	54	32.57	27.62	17.01	33.48	200	64	A	H	
	*	2402	94.9	-	-	83.78	27.5	17.07	33.45	200	64	P	H	
	*	2402	94.42	-	-	83.3	27.5	17.07	33.45	200	64	A	H	
													H	
														H
			2370.69	53.66	-20.34	74	42.52	27.56	17.04	33.46	250	10	P	V
			2347.8	43.85	-10.15	54	32.71	27.6	17.02	33.48	250	10	A	V
	*		2402	102.93	-	-	91.81	27.5	17.07	33.45	250	10	P	V
	*		2402	102.31	-	-	91.19	27.5	17.07	33.45	250	10	A	V
														V
														V
BLE CH 19 2440MHz		2373.2	53.05	-20.95	74	41.91	27.55	17.05	33.46	255	80	P	H	
		2351.76	43.8	-10.2	54	32.64	27.6	17.03	33.47	255	80	A	H	
	*	2440	96.19	-	-	84.99	27.5	17.13	33.43	255	80	P	H	
	*	2440	95.63	-	-	84.43	27.5	17.13	33.43	255	80	A	H	
			2483.6	53.33	-20.67	74	42.11	27.43	17.2	33.41	255	80	P	H
			2496.4	43.97	-10.03	54	32.74	27.41	17.22	33.4	255	80	A	H
			2340.72	53.49	-20.51	74	42.33	27.62	17.02	33.48	356	360	P	V
			2345.04	43.84	-10.16	54	32.69	27.61	17.02	33.48	356	360	A	V
	*		2440	102.81	-	-	91.61	27.5	17.13	33.43	356	360	P	V
	*		2440	102.1	-	-	90.9	27.5	17.13	33.43	356	360	A	V
			2491.12	54.08	-19.92	74	42.85	27.42	17.21	33.4	356	360	P	V
			2495.92	44.23	-9.77	54	33	27.41	17.22	33.4	356	360	A	V



BLE CH 39 2480MHz	*	2480	98.04	-	-	86.82	27.44	17.19	33.41	250	52	P	H
	*	2480	97.51	-	-	86.29	27.44	17.19	33.41	250	52	A	H
		2499.88	53.12	-20.88	74	41.9	27.4	17.22	33.4	250	52	P	H
		2488.16	44.36	-9.64	54	33.14	27.42	17.21	33.41	250	52	A	H
													H
													H
	*	2480	103.8	-	-	92.58	27.44	17.19	33.41	350	357	P	V
	*	2480	102.77	-	-	91.55	27.44	17.19	33.41	350	357	A	V
		2486.92	53.56	-20.44	74	42.34	27.43	17.2	33.41	350	357	P	V
		2483.8	44.22	-9.78	54	33	27.43	17.2	33.41	350	357	A	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz
BLE (Harmonic @ 3m)

BLE	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
BLE CH 00 2402MHz		4804	47.06	-26.94	74	71.05	31	11.18	66.17	100	0	P	H
		17985	58.11	-15.89	74	52.24	47.1	23.89	65.12	100	0	P	H
		17985	49.15	-4.85	54	43.28	47.1	23.89	65.12	100	0	A	H
													H
		4804	51.45	-22.55	74	75.44	31	11.18	66.17	297	51	P	V
		4804	48.59	-5.41	54	72.58	31	11.18	66.17	297	51	A	V
		17955	57.45	-16.55	74	52.26	46.5	23.86	65.17	100	0	P	V
		17955	48.55	-5.45	54	43.36	46.5	23.86	65.17	100	0	A	V
BLE CH 19 2440MHz		4880	41.54	-32.46	74	64.78	31.54	11.34	66.12	100	0	P	H
		7320	41.28	-32.72	74	57.15	36.4	13.45	65.72	100	0	P	H
		17985	57.26	-16.74	74	51.39	47.1	23.89	65.12	100	0	P	H
		17985	49.06	-4.94	54	43.19	47.1	23.89	65.12	100	0	A	H
		4880	44.83	-29.17	74	68.07	31.54	11.34	66.12	100	0	P	V
		7320	41.03	-32.97	74	56.9	36.4	13.45	65.72	100	0	P	V
		17955	57.45	-16.55	74	52.26	46.5	23.86	65.17	100	0	P	V
		17955	48.5	-5.5	54	43.31	46.5	23.86	65.17	100	0	A	V
BLE CH 39 2480MHz		4960	38.85	-35.15	74	62.34	31.06	11.51	66.06	100	0	P	H
		7440	40.78	-33.22	74	56.27	36.56	13.74	65.79	100	0	P	H
		18000	57.48	-16.52	74	51.28	47.4	23.9	65.1	100	0	P	H
		18000	49.3	-4.7	54	43.1	47.4	23.9	65.1	100	0	A	H
		4960	40.76	-33.24	74	64.25	31.06	11.51	66.06	100	0	P	V
		7440	41.07	-32.93	74	56.56	36.56	13.74	65.79	100	0	P	V
		17955	58.29	-15.71	74	53.1	46.5	23.86	65.17	100	0	P	V
		17955	48.46	-5.54	54	43.27	46.5	23.86	65.17	100	0	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Emission above 18GHz

2.4GHz BLE (SHF)

BLE	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
2.4GHz BLE SHF		23474	38.78	-35.22	74	56.58	39.22	-3.01	54.01	150	0	P	H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
			21822	39	-35	74	58.48	38.51	-3.01	54.7	150	0	P
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against limit line.												



Emission below 1GHz

2.4GHz BLE (LF)

BLE	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.	
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)	
2.4GHz BLE LF		36.79	23.21	-16.79	40	33.91	20.85	0.93	32.48	-	-	P	H	
		62.01	26.13	-13.87	40	45.74	11.72	1.21	32.54	100	0	P	H	
		171.62	26.47	-17.03	43.5	41.62	15.33	2.05	32.53	-	-	P	H	
		749.74	28.14	-17.86	46	28.02	28.01	4.11	32	-	-	P	H	
		784.66	29.09	-16.91	46	28.42	28.18	4.21	31.72	-	-	P	H	
		880.69	30.87	-15.13	46	28.46	29.19	4.5	31.28	-	-	P	H	
														H
														H
														H
														H
														H
														H
			37.76	31.25	-8.75	40	42.37	20.42	0.95	32.49	100	170	QP	V
			62.01	28.54	-11.46	40	48.15	11.72	1.21	32.54	-	-	P	V
			192.96	30.44	-13.06	43.5	46.18	14.65	2.15	32.54	-	-	P	V
			786.6	29.4	-16.6	46	28.69	28.2	4.22	31.71	-	-	P	V
			833.16	30.55	-15.45	46	29.18	28.5	4.34	31.47	-	-	P	V
			873.9	30.67	-15.33	46	28.26	29.24	4.47	31.3	-	-	P	V
														V
														V
													V	
													V	
													V	
													V	
Remark	1. No other spurious found. 2. All results are PASS against limit line.													



<2Mbps>

2.4GHz 2400~2483.5MHz

BLE (Band Edge @ 3m)

BLE	Note	Frequency	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Path Loss	Preamp Factor	Ant Pos	Table Pos	Peak Avg.	Pol.	
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)	
BLE CH 00 2402MHz		2384.13	53.57	-20.43	74	42.44	27.53	17.06	33.46	111	67	P	H	
		2313.885	45.21	-8.79	54	34.04	27.67	16.99	33.49	111	67	A	H	
	*	2402	94.21	-	-	83.09	27.5	17.07	33.45	111	67	P	H	
	*	2402	92.79	-	-	81.67	27.5	17.07	33.45	111	67	A	H	
													H	
													H	
			2375.1	53.08	-20.92	74	41.94	27.55	17.05	33.46	285	49	P	V
			2342.55	45.56	-8.44	54	34.41	27.61	17.02	33.48	285	49	A	V
	*		2402	102.65	-	-	91.53	27.5	17.07	33.45	285	49	P	V
	*		2402	101.4	-	-	90.28	27.5	17.07	33.45	285	49	A	V
													V	
													V	
BLE CH 19 2440MHz		2336.66	53.31	-20.69	74	42.15	27.63	17.01	33.48	136	67	P	H	
		2372	45.76	-8.24	54	34.62	27.56	17.04	33.46	136	67	A	H	
	*	2440	95.64	-	-	84.44	27.5	17.13	33.43	136	67	P	H	
	*	2440	94.37	-	-	83.17	27.5	17.13	33.43	136	67	A	H	
			2489.22	53.22	-20.78	74	42	27.42	17.21	33.41	136	67	P	H
			2496.5	45.15	-8.85	54	33.92	27.41	17.22	33.4	136	67	A	H
			2369.83	53.33	-20.67	74	42.2	27.56	17.04	33.47	279	7	P	V
			2345.96	45.43	-8.57	54	34.28	27.61	17.02	33.48	279	7	A	V
	*		2440	103.23	-	-	92.03	27.5	17.13	33.43	279	7	P	V
	*		2440	101.83	-	-	90.63	27.5	17.13	33.43	279	7	A	V
			2494.61	52.9	-21.1	74	41.67	27.41	17.22	33.4	279	7	P	V
			2493.28	45.54	-8.46	54	34.32	27.41	17.21	33.4	279	7	A	V



BLE CH 39 2480MHz	*	2480	95.38	-	-	84.16	27.44	17.19	33.41	100	65	P	H
	*	2480	94.17	-	-	82.95	27.44	17.19	33.41	100	65	A	H
		2487.76	53.69	-20.31	74	42.47	27.42	17.21	33.41	100	65	P	H
		2487.56	45.4	-8.6	54	34.18	27.42	17.21	33.41	100	65	A	H
													H
													H
	*	2480	103.96	-	-	92.74	27.44	17.19	33.41	300	13	P	V
	*	2480	101.68	-	-	90.46	27.44	17.19	33.41	300	13	A	V
		2483.6	55.4	-18.6	74	44.18	27.43	17.2	33.41	300	13	P	V
		2496.08	45.88	-8.12	54	34.65	27.41	17.22	33.4	300	13	A	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz
BLE (Harmonic @ 3m)

BLE	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
BLE CH 00 2402MHz		4804	45.67	-28.33	74	69.66	31	11.18	66.17	100	0	P	H
		17970	57.8	-16.2	74	52.28	46.8	23.87	65.15	100	0	P	H
		17970	48.9	-5.1	54	43.38	46.8	23.87	65.15	100	0	A	H
													H
		4804	51.86	-22.14	74	75.85	31	11.18	66.17	302	51	P	V
		4804	48.02	-5.98	54	72.01	31	11.18	66.17	302	51	A	V
		18000	57.43	-16.57	74	51.23	47.4	23.9	65.1	100	0	P	V
		18000	50.05	-3.95	54	43.85	47.4	23.9	65.1	100	0	A	V
BLE CH 19 2440MHz		4880	39.39	-34.61	74	62.63	31.54	11.34	66.12	100	0	P	H
		7320	41.28	-32.72	74	57.15	36.4	13.45	65.72	100	0	P	H
		17970	57.8	-16.2	74	52.28	46.8	23.87	65.15	100	0	P	H
		17970	49.73	-4.27	54	44.21	46.8	23.87	65.15	100	0	A	H
		4880	44.85	-29.15	74	68.09	31.54	11.34	66.12	100	0	P	V
		7320	41.55	-32.45	74	57.42	36.4	13.45	65.72	100	0	P	V
		17955	58.31	-15.69	74	53.12	46.5	23.86	65.17	100	0	P	V
		17955	49.08	-4.92	54	43.89	46.5	23.86	65.17	100	0	A	V
BLE CH 39 2480MHz		4960	39.09	-34.91	74	62.58	31.06	11.51	66.06	100	0	P	H
		7440	42.17	-31.83	74	57.66	36.56	13.74	65.79	100	0	P	H
		17970	57.73	-16.27	74	52.21	46.8	23.87	65.15	100	0	P	H
		17970	49.19	-4.81	54	43.67	46.8	23.87	65.15	100	0	A	H
		4960	40.29	-33.71	74	63.78	31.06	11.51	66.06	100	0	P	V
		7440	42.18	-31.82	74	57.67	36.56	13.74	65.79	100	0	P	V
		17955	58.17	-15.83	74	52.98	46.5	23.86	65.17	100	0	P	V
		17955	49.07	-4.93	54	43.88	46.5	23.86	65.17	100	0	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Note symbol

*	Fundamental Frequency which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is over limit line.
P/A	Peak or Average
H/V	Horizontal or Vertical



A calculation example for radiated spurious emission is shown as below:

BLE	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
		(MHz)	(dBμV/m)	(dB)	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
					(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
BLE		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
CH 00		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H
2402MHz													

1. Path Loss(dB) = Cable loss(dB) + Filter loss(dB) + Attenuator loss(dB)
2. Level(dBμV/m) =
Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
3. Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

For Peak Limit @ 2390MHz:

1. Level(dBμV/m)
= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)
= 55.45 (dBμV/m)
2. Over Limit(dB)
= Level(dBμV/m) – Limit Line(dBμV/m)
= 55.45(dBμV/m) – 74(dBμV/m)
= -18.55(dB)

For Average Limit @ 2390MHz:

1. Level(dBμV/m)
= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)
= 43.54 (dBμV/m)
2. Over Limit(dB)
= Level(dBμV/m) – Limit Line(dBμV/m)
= 43.54(dBμV/m) – 54(dBμV/m)
= -10.46(dB)

Both peak and average measured complies with the limit line, so test result is “PASS”.



Appendix D. Radiated Spurious Emission Plots

Test Engineer :	Harvey Guo, Bill Chang, Fu Chen and Troye Hsieh	Temperature :	18.3~25.7°C
		Relative Humidity :	58.2~70.8%

Note symbol





-L	Low channel location
-R	High channel location







<1Mbps>

2.4GHz 2400~2483.5MHz





BLE (Band Edge @ 3m)

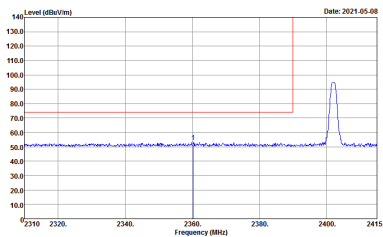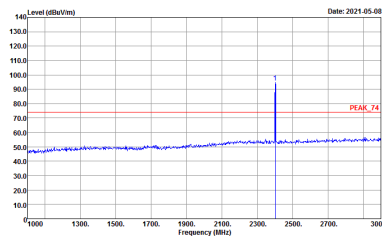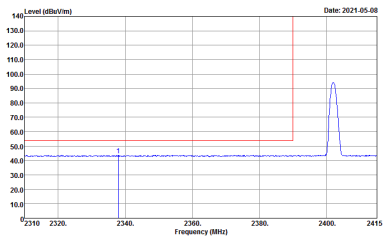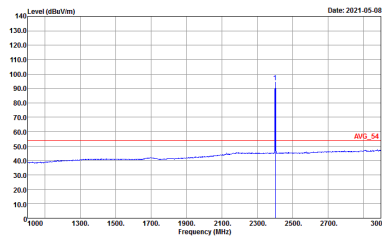BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	BLE CH00 2402MHz	
	Horizontal	Fundamental
Peak	 <p>Site : 03CH11-HY Condition : PEAK_BE_74 3m HORN 9120D-HF_1326 HORIZONTAL Detector : Peak Project : 131119-01</p>	 <p>Site : 03CH11-HY Condition : PEAK_74 3m HORN 9120D-HF_1326 HORIZONTAL Detector : Peak Project : 131119-01</p>
Avg.	 <p>Site : 03CH11-HY Condition : AV6_BE_54 3m HORN 9120D-HF_1326 HORIZONTAL Detector : Peak Project : 131119-01</p>	 <p>Site : 03CH11-HY Condition : AV6_54 3m HORN 9120D-HF_1326 HORIZONTAL Detector : Peak Project : 131119-01</p>

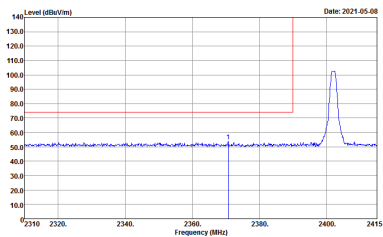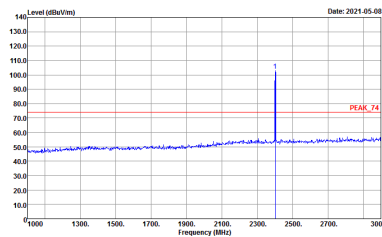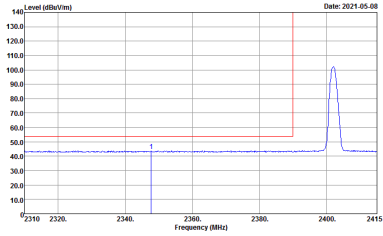
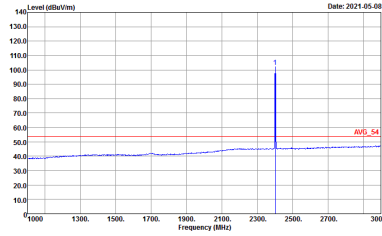


BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
BLE CH00 2402MHz		
Vertical		Fundamental
Peak	 <p>Site : 03CH11-HY Condition : PEAK_BE_74 3m HORN 91200-HF_1326 VERTICAL Detector : Peak Project : 131119-01</p>	 <p>Site : 03CH11-HY Condition : PEAK_74 3m HORN 91200-HF_1326 VERTICAL Detector : Peak Project : 131119-01</p>
Avg	 <p>Site : 03CH11-HY Condition : AVG_BE_54 3m HORN 91200-HF_1326 VERTICAL Detector : Peak Project : 131119-01</p>	 <p>Site : 03CH11-HY Condition : AVG_54 3m HORN 91200-HF_1326 VERTICAL Detector : Peak Project : 131119-01</p>

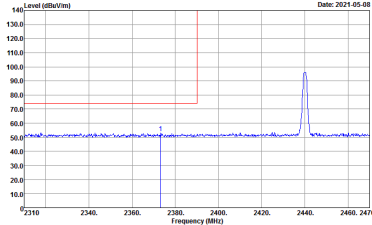
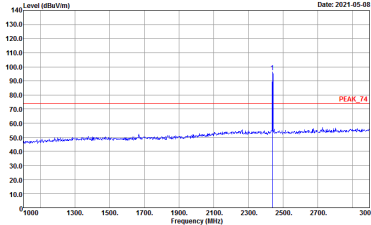
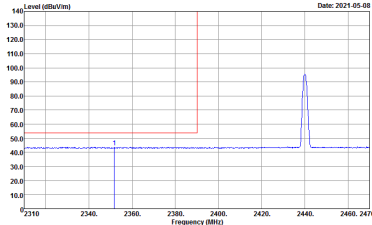
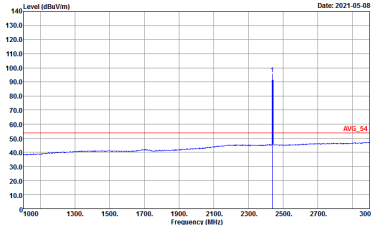


BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
BLE CH19 2440MHz - L		
Horizontal		Fundamental
Peak	 <p>Date: 2021-05-08</p> <p>Site : 03CH11-HY Condition : PEAK_BE_74 3m HORN 91200-HF_1326 HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 131119-01</p>	 <p>Date: 2021-05-08</p> <p>Site : 03CH11-HY Condition : PEAK_74 3m HORN 91200-HF_1326 HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 131119-01</p>
Avg.	 <p>Date: 2021-05-08</p> <p>Site : 03CH11-HY Condition : AVG_BE_54 3m HORN 91200-HF_1326 HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 131119-01</p>	 <p>Date: 2021-05-08</p> <p>Site : 03CH11-HY Condition : AVG_54 3m HORN 91200-HF_1326 HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 131119-01</p>

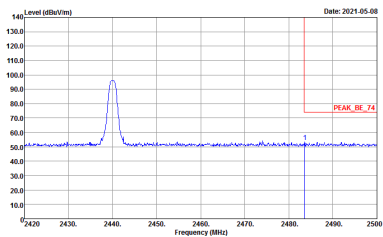
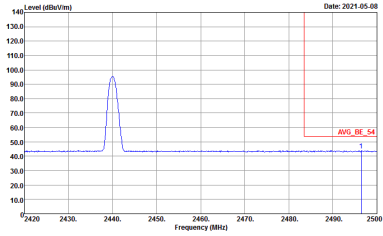


BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
BLE CH19 2440MHz - R		
	Horizontal	Fundamental
Peak	 <p>Site : 03CH11-HY Condition : PEAK_BE_74 3m HORN 91200-HF_1326 HORIZONTAL Detector : Peak Project : 131119-01</p>	Left blank
Avg.	 <p>Site : 03CH11-HY Condition : AVG_BE_54 3m HORN 91200-HF_1326 HORIZONTAL Detector : Peak Project : 131119-01</p>	Left blank

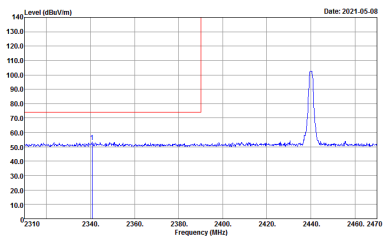
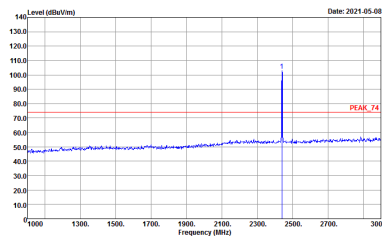
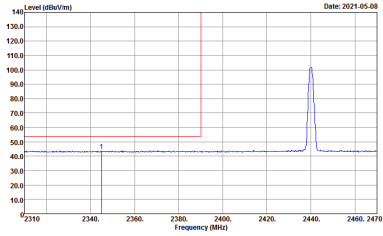
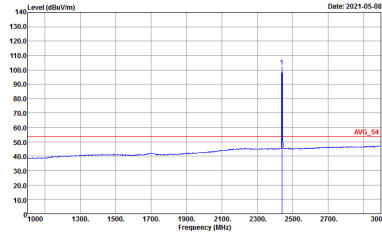


BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
BLE CH19 2440MHz - L		
Vertical		Fundamental
Peak	 <p>Level (dBm/100kHz) vs Frequency (MHz) plot showing a peak at 2440 MHz. The y-axis ranges from 10.0 to 140.0 dBm/100kHz, and the x-axis ranges from 2310 to 2470 MHz. A red horizontal line is drawn at approximately 75 dBm/100kHz.</p> <p>Site : 03CH11-HY Condition : PEAK_BE_74 3m HORN 91200-HF_1326 VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 131119-01</p>	 <p>Level (dBm/100kHz) vs Frequency (MHz) plot showing a peak at 2440 MHz. The y-axis ranges from 10.0 to 140.0 dBm/100kHz, and the x-axis ranges from 1000 to 3000 MHz. A red horizontal line is drawn at approximately 75 dBm/100kHz, labeled 'PEAK 74'.</p> <p>Site : 03CH11-HY Condition : PEAK_74 3m HORN 91200-HF_1326 VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 131119-01</p>
Avg.	 <p>Level (dBm/100kHz) vs Frequency (MHz) plot showing a peak at 2440 MHz. The y-axis ranges from 10.0 to 140.0 dBm/100kHz, and the x-axis ranges from 2310 to 2470 MHz. A red horizontal line is drawn at approximately 75 dBm/100kHz.</p> <p>Site : 03CH11-HY Condition : AVG_BE_54 3m HORN 91200-HF_1326 VERTICAL RBW:1000.000KHz VBW:3.000KHz SWT:Auto Detector : Peak Project : 131119-01</p>	 <p>Level (dBm/100kHz) vs Frequency (MHz) plot showing a peak at 2440 MHz. The y-axis ranges from 10.0 to 140.0 dBm/100kHz, and the x-axis ranges from 1000 to 3000 MHz. A red horizontal line is drawn at approximately 75 dBm/100kHz, labeled 'AVG 54'.</p> <p>Site : 03CH11-HY Condition : AVG_54 3m HORN 91200-HF_1326 VERTICAL RBW:1000.000KHz VBW:3.000KHz SWT:Auto Detector : Peak Project : 131119-01</p>



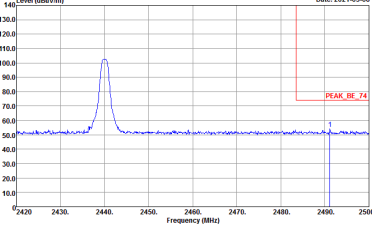
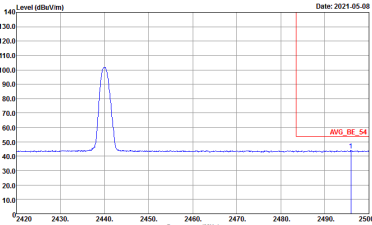


BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
BLE CH19 2440MHz - R		
Vertical		Fundamental
Peak	 <p> Site : 03CH11-HY Condition : PEAK_BE_74 3m HORN 91200-HF_1326 VERTICAL Detector : Peak Project : 131119-01 </p>	Left blank
Avg.	 <p> Site : 03CH11-HY Condition : AVG_BE_54 3m HORN 91200-HF_1326 VERTICAL Detector : Peak Project : 131119-01 </p>	Left blank

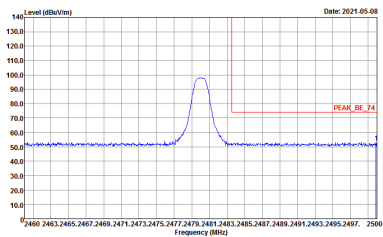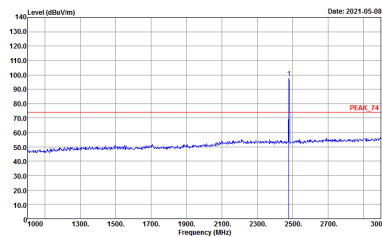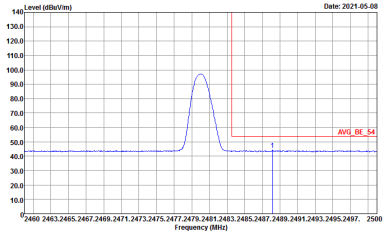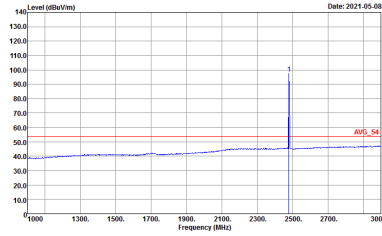

BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
BLE CH39 2480MHz		
Horizontal		Fundamental
Peak	 <p>Date: 2021-05-08</p> <p>Site : 03CH11-HY Condition : PEAK_BE_74 3m HORN 91200-HF_1326 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 131119-01</p>	 <p>Date: 2021-05-08</p> <p>Site : 03CH11-HY Condition : PEAK_74 3m HORN 91200-HF_1326 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 131119-01</p>
Avg.	 <p>Date: 2021-05-08</p> <p>Site : 03CH11-HY Condition : AVG_BE_54 3m HORN 91200-HF_1326 HORIZONTAL : RBW:1000.000KHz VBW:3.000KHz SWT:Auto Detector : Peak Project : 131119-01</p>	 <p>Date: 2021-05-08</p> <p>Site : 03CH11-HY Condition : AVG_54 3m HORN 91200-HF_1326 HORIZONTAL : RBW:1000.000KHz VBW:3.000KHz SWT:Auto Detector : Peak Project : 131119-01</p>

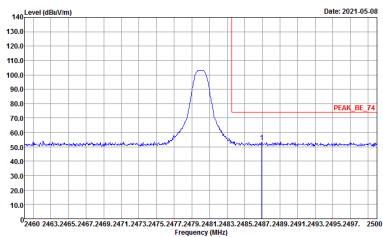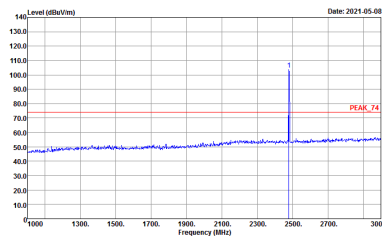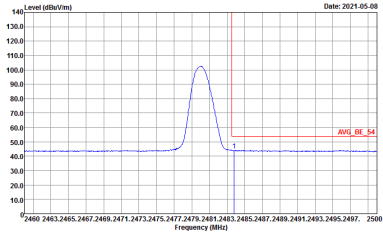
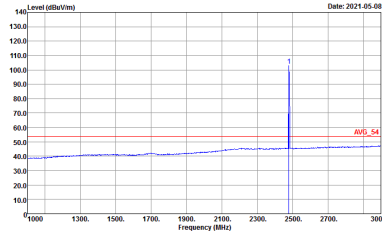


BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
BLE CH39 2480MHz		
Vertical		Fundamental
Peak	 <p>Site : 03CH11-HY Condition : PEAK_BE_74 3m HORN 91200-HF_1326 VERTICAL Detector : Peak Project : 131119-01</p>	 <p>Site : 03CH11-HY Condition : PEAK_74 3m HORN 91200-HF_1326 VERTICAL Detector : Peak Project : 131119-01</p>
Avg.	 <p>Site : 03CH11-HY Condition : AVG_BE_54 3m HORN 91200-HF_1326 VERTICAL Detector : Peak Project : 131119-01</p>	 <p>Site : 03CH11-HY Condition : AVG_54 3m HORN 91200-HF_1326 VERTICAL Detector : Peak Project : 131119-01</p>





2.4GHz 2400~2483.5MHz

BLE (Harmonic @ 3m)

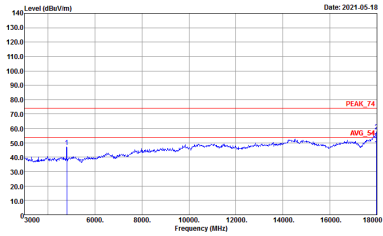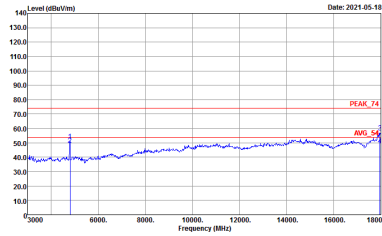BLE	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
	BLE CH00 2402MHz	
	Horizontal	Vertical
<p>Peak</p> <p>Avg.</p>	 <p>Site : 09CH11-HY Condition : PEAK_74 3m HORN 91200-HF_1326 HORIZONTAL Detector : Peak Project : 131119-01</p>	 <p>Site : 09CH11-HY Condition : PEAK_74 3m HORN 91200-HF_1326 VERTICAL Detector : Peak Project : 131119-01</p>

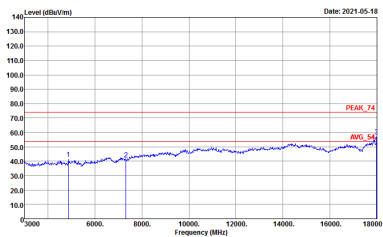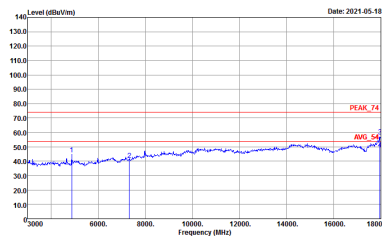

BLE	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
BLE CH19 2440MHz		
	Horizontal	Vertical
<p>Peak</p> <p>Avg.</p>	 <p>Site : 03CH11-14Y Condition : PEAK_74 3m HORN 91200-HF_1326 HORIZONTAL Detector : Peak Project : 131119-01</p>	 <p>Site : 03CH11-14Y Condition : PEAK_74 3m HORN 91200-HF_1326 VERTICAL Detector : Peak Project : 131119-01</p>





BLE	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
	BLE CH39 2480MHz	
	Horizontal	Vertical
Peak	<p>Site : 03CH11-14Y Condition : PEAK_74 3m HORN 91200-HF_1326 HORIZONTAL Detector : Peak Project : 131119-01</p>	<p>Site : 03CH11-14Y Condition : PEAK_74 3m HORN 91200-HF_1326 VERTICAL Detector : Peak Project : 131119-01</p>



Emission above 18GHz



2.4GHz BLE (SHF)

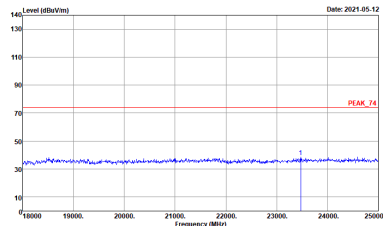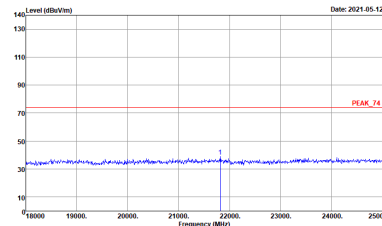BLE	2.4GHz 2400~2483.5MHz	
BLE SHF		
Horizontal		Vertical
<p>QP / Peak</p>	 <p>Site : 03CH11-HY Condition : PEAK_74 1m SHF ANT_9170_00993 HORIZONTAL Detector : Peak Project : 131119-01</p>	 <p>Site : 03CH11-HY Condition : PEAK_74 1m SHF ANT_9170_00993 VERTICAL Detector : Peak Project : 131119-01</p>



Emission below 1GHz

2.4GHz BLE (LF)



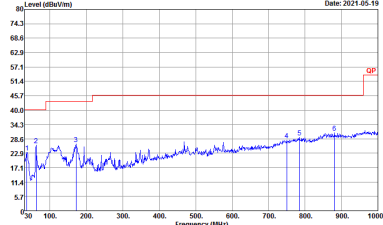
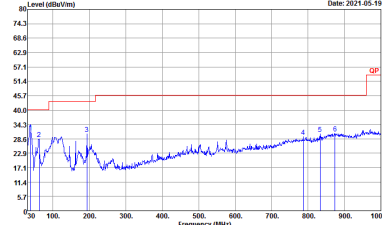
BLE	2.4GHz 2400~2483.5MHz	
	BLE LF	
	Horizontal	Vertical
QP / Peak	 <p>Site : 03CH11-HY Condition : QP 3m BE-LOG 6111D-LF_ETC HORIZONTAL Detector : Peak Project : 131119-01</p>	 <p>Site : 03CH11-HY Condition : QP 3m BE-LOG 6111D-LF_ETC VERTICAL Detector : Peak Project : 131119-01</p>







<2Mbps>

2.4GHz 2400~2483.5MHz





BLE (Band Edge @ 3m)

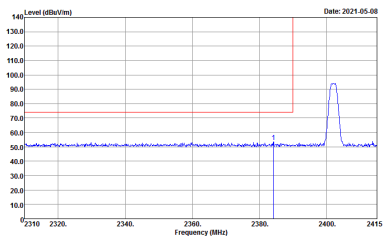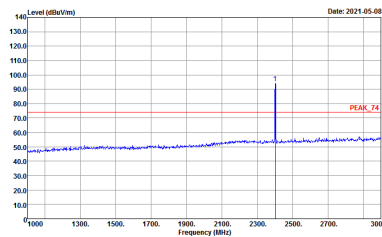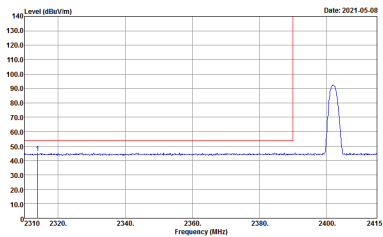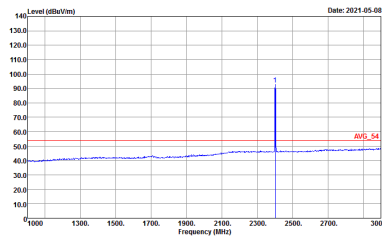BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	BLE CH00 2402MHz	
	Horizontal	Fundamental
Peak	 <p>Date: 2021-05-08</p> <p>Site : 03CH11-HY Condition : PEAK_BE_74 3m HORN 9120D-HF_1326 HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 131119-01</p>	 <p>Date: 2021-05-08</p> <p>Site : 03CH11-HY Condition : PEAK_74 3m HORN 9120D-HF_1326 HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 131119-01</p>
Avg.	 <p>Date: 2021-05-08</p> <p>Site : 03CH11-HY Condition : AV6_BE_54 3m HORN 9120D-HF_1326 HORIZONTAL RBW:1000.000KHz VBW:10.000KHz SWT:Auto Detector : Peak Project : 131119-01</p>	 <p>Date: 2021-05-08</p> <p>Site : 03CH11-HY Condition : AV6_54 3m HORN 9120D-HF_1326 HORIZONTAL RBW:1000.000KHz VBW:10.000KHz SWT:Auto Detector : Peak Project : 131119-01</p>

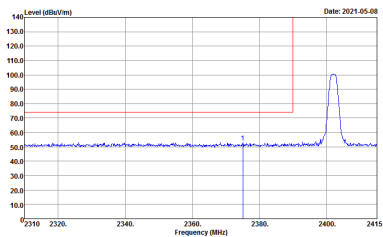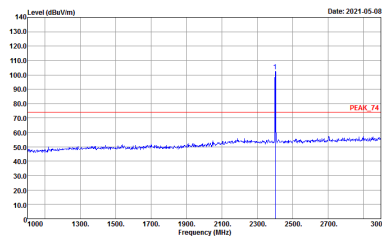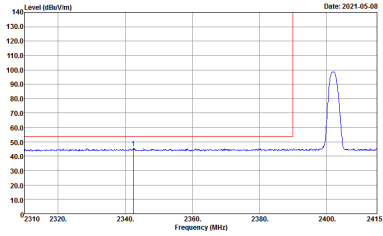
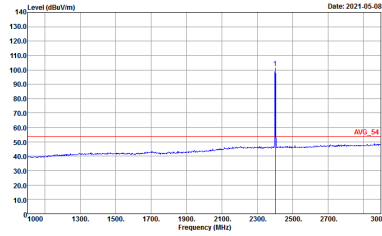


BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
BLE CH00 2402MHz		
Vertical		Fundamental
Peak	 <p>Site : 03CH11-HY Condition : PEAK_BE_74 3m HORN 91200-HF_1326 VERTICAL Detector : Peak Project : 131119-01</p>	 <p>Site : 03CH11-HY Condition : PEAK_74 3m HORN 91200-HF_1326 VERTICAL Detector : Peak Project : 131119-01</p>
Avg	 <p>Site : 03CH11-HY Condition : AVG_BE_54 3m HORN 91200-HF_1326 VERTICAL Detector : Peak Project : 131119-01</p>	 <p>Site : 03CH11-HY Condition : AVG_54 3m HORN 91200-HF_1326 VERTICAL Detector : Peak Project : 131119-01</p>

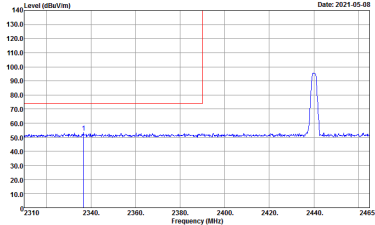
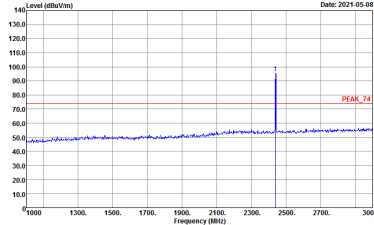
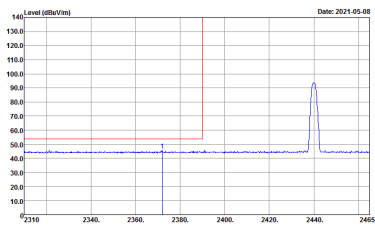
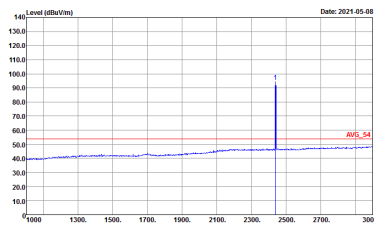


BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
BLE CH19 2440MHz - L		
Horizontal		Fundamental
Peak	 <p>Date: 2021-05-08</p> <p>Site : 03CH11-HY Condition : PEAK_BE_74 3m HORN 91200-HF_1326 HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 131119-01</p>	 <p>Date: 2021-05-08</p> <p>Site : 03CH11-HY Condition : PEAK_74 3m HORN 91200-HF_1326 HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 131119-01</p>
Avg.	 <p>Date: 2021-05-08</p> <p>Site : 03CH11-HY Condition : AVG_BE_54 3m HORN 91200-HF_1326 HORIZONTAL RBW:1000.000KHz VBW:10.000KHz SWT:Auto Detector : Peak Project : 131119-01</p>	 <p>Date: 2021-05-08</p> <p>Site : 03CH11-HY Condition : AVG_54 3m HORN 91200-HF_1326 HORIZONTAL RBW:1000.000KHz VBW:10.000KHz SWT:Auto Detector : Peak Project : 131119-01</p>

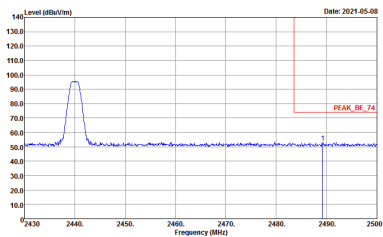
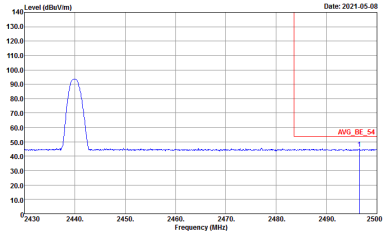


BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
BLE CH19 2440MHz - R		
Horizontal		Fundamental
<p>Peak</p>	 <p>Site : 03CH11-HY Condition : PEAK_BE_74 3m HORN 91200-HF_1326 HORIZONTAL Detector : Peak Project : 131119-01</p>	<p>Left blank</p>
<p>Avg.</p>	 <p>Site : 03CH11-HY Condition : AVG_BE_54 3m HORN 91200-HF_1326 HORIZONTAL Detector : Peak Project : 131119-01</p>	<p>Left blank</p>

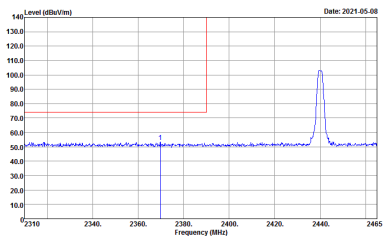
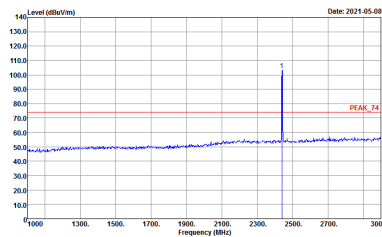
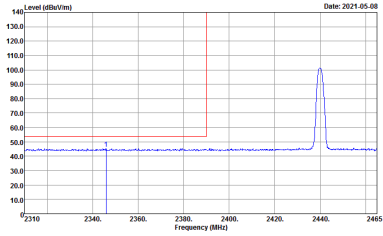
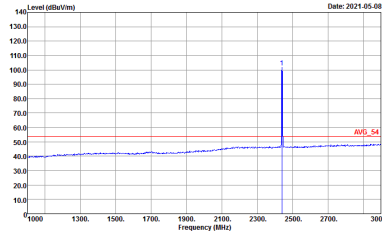


BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
BLE CH19 2440MHz - L		
Vertical		Fundamental
Peak	 <p>Site : 03CH11-HY Condition : PEAK_BE_74 3m HORN 91200-HF_1326 VERTICAL Detector : Peak Project : 131119-01</p>	 <p>Site : 03CH11-HY Condition : PEAK_74 3m HORN 91200-HF_1326 VERTICAL Detector : Peak Project : 131119-01</p>
Avg.	 <p>Site : 03CH11-HY Condition : AVG_BE_54 3m HORN 91200-HF_1326 VERTICAL Detector : Peak Project : 131119-01</p>	 <p>Site : 03CH11-HY Condition : AVG_54 3m HORN 91200-HF_1326 VERTICAL Detector : Peak Project : 131119-01</p>



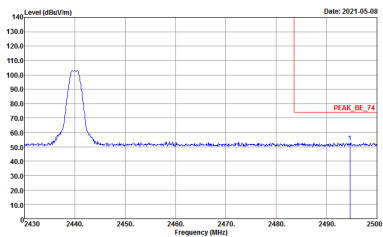
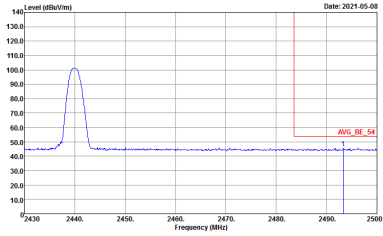


BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
BLE CH19 2440MHz - R		
	Vertical	Fundamental
Peak	 <p>Site : 03CH11-HY Condition : PEAK_BE_74 3m HORN 91200-HF_1326 VERTICAL Detector : Peak Project : 131119-01</p>	Left blank
Avg.	 <p>Site : 03CH11-HY Condition : AVG_BE_54 3m HORN 91200-HF_1326 VERTICAL Detector : Peak Project : 131119-01</p>	Left blank

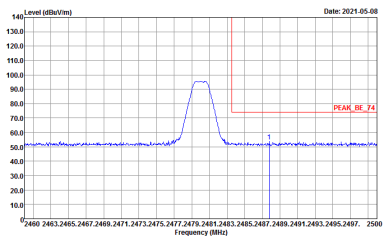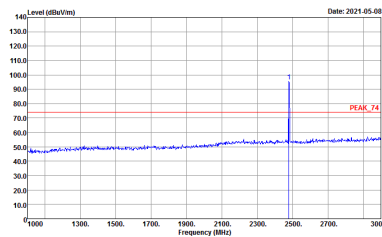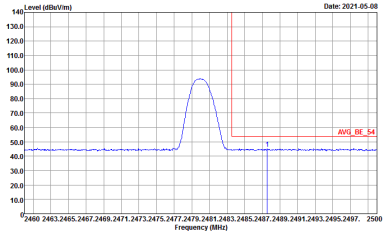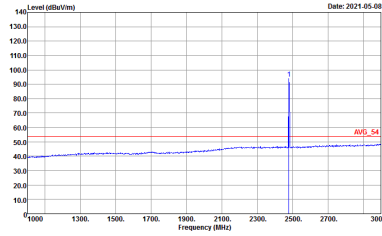

BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
BLE CH39 2480MHz		
Horizontal		Fundamental
Peak	 <p>Date: 2021-05-08</p> <p>Site : 03CH11-HY Condition : PEAK_BE_74 3m HORN 91200-HF_1326 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 131119-01</p>	 <p>Date: 2021-05-08</p> <p>Site : 03CH11-HY Condition : PEAK_74 3m HORN 91200-HF_1326 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 131119-01</p>
Avg.	 <p>Date: 2021-05-08</p> <p>Site : 03CH11-HY Condition : AVG_BE_54 3m HORN 91200-HF_1326 HORIZONTAL : RBW:1000.000KHz VBW:10.000KHz SWT:Auto Detector : Peak Project : 131119-01</p>	 <p>Date: 2021-05-08</p> <p>Site : 03CH11-HY Condition : AVG_54 3m HORN 91200-HF_1326 HORIZONTAL : RBW:1000.000KHz VBW:10.000KHz SWT:Auto Detector : Peak Project : 131119-01</p>

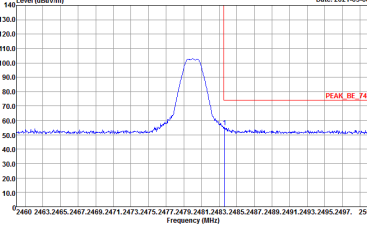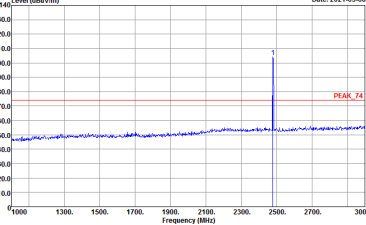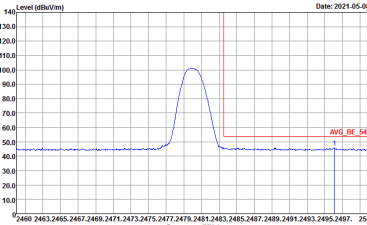
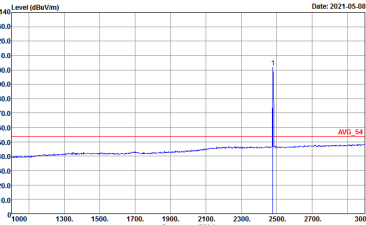


BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
BLE CH39 2480MHz		
Vertical		Fundamental
Peak	 <p>Level (dBm/1m) vs Frequency (MHz) plot showing a peak at 2480 MHz. The peak level is approximately 105 dBm/1m. A red line indicates the peak level at 105.0 dBm/1m, labeled 'PEAK_BE_74'.</p> <p>Site : 03CH11-HY Condition : PEAK_BE_74 3m HORN 91200-HF_1326 VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 131119-01</p>	 <p>Level (dBm/1m) vs Frequency (MHz) plot showing a sharp peak at 2480 MHz. The peak level is approximately 105 dBm/1m. A red line indicates the peak level at 105.0 dBm/1m, labeled 'PEAK_74'.</p> <p>Site : 03CH11-HY Condition : PEAK_74 3m HORN 91200-HF_1326 VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 131119-01</p>
Avg.	 <p>Level (dBm/1m) vs Frequency (MHz) plot showing an average spectrum with a peak at 2480 MHz. The average level is approximately 100 dBm/1m. A red line indicates the average level at 100.0 dBm/1m, labeled 'AVG_BE_54'.</p> <p>Site : 03CH11-HY Condition : AVG_BE_54 3m HORN 91200-HF_1326 VERTICAL RBW:1000.000KHz VBW:10.000KHz SWT:Auto Detector : Peak Project : 131119-01</p>	 <p>Level (dBm/1m) vs Frequency (MHz) plot showing an average spectrum with a sharp peak at 2480 MHz. The average level is approximately 100 dBm/1m. A red line indicates the average level at 100.0 dBm/1m, labeled 'AVG_54'.</p> <p>Site : 03CH11-HY Condition : AVG_54 3m HORN 91200-HF_1326 VERTICAL RBW:1000.000KHz VBW:10.000KHz SWT:Auto Detector : Peak Project : 131119-01</p>





2.4GHz 2400~2483.5MHz



BLE (Harmonic @ 3m)

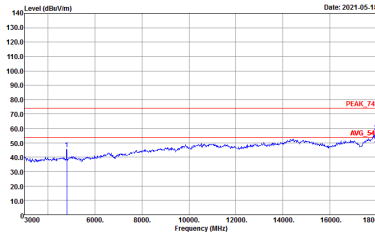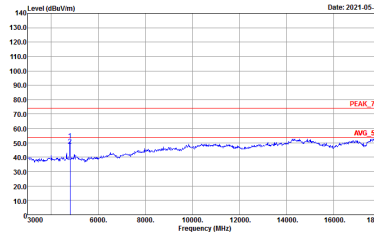BLE	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
	BLE CH00 2402MHz	
	Horizontal	Vertical
<p>Peak</p> <p>Avg.</p>	 <p>Site : 09CH11-HY Condition : PEAK_74 3m HORN 91200-HF_1326 HORIZONTAL Detector : Peak Project : 131119-01</p>	 <p>Site : 09CH11-HY Condition : PEAK_74 3m HORN 91200-HF_1326 VERTICAL Detector : Peak Project : 131119-01</p>

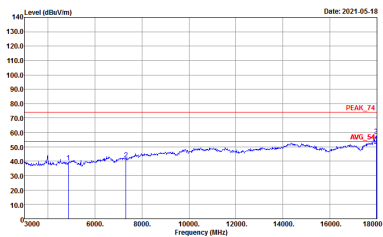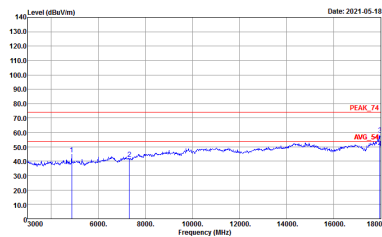

BLE	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
BLE CH19 2440MHz		
	Horizontal	Vertical
<p>Peak</p> <p>Avg.</p>	 <p>Site : 03CH11-14Y Condition : PEAK_74 3m HORN 91200-HF_1326 HORIZONTAL Detector : Peak Project : 131119-01</p>	 <p>Site : 03CH11-14Y Condition : PEAK_74 3m HORN 91200-HF_1326 VERTICAL Detector : Peak Project : 131119-01</p>

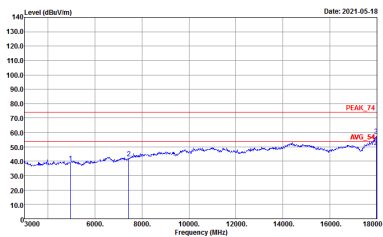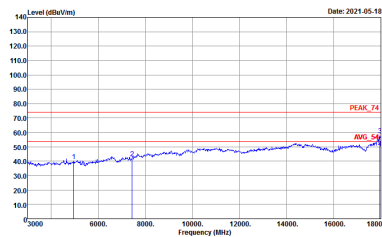

BLE	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
	BLE CH39 2480MHz	
	Horizontal	Vertical
<p>Peak</p> <p>Avg.</p>	 <p>Site : 03CH11-14Y Condition : PEAK_74 3m HORN 91200-HF_1326 HORIZONTAL Detector : Peak Project : 131119-01</p>	 <p>Site : 03CH11-14Y Condition : PEAK_74 3m HORN 91200-HF_1326 VERTICAL Detector : Peak Project : 131119-01</p>



Appendix E. Duty Cycle Plots

Band	Duty Cycle(%)	T(us)	1/T(kHz)	VBW Setting	Duty Factor(dB)
Bluetooth - LE for 1Mbps	62.62	392	2.55	3kHz	2.03
Bluetooth - LE for 2Mbps	32.91	206	4.85	10kHz	4.83

