



FCC RADIO TEST REPORT

FCC ID : 2AGOZ-K29W
Equipment : Media Receiver
Brand Name : FACEBOOK
Model Name : WT74BL
Applicant : Facebook Technologies, LLC
1 Hacker Way, Menlo Park, CA 94025, USA
Standard : FCC Part 15 Subpart E §15.407

The product was received on Mar. 24, 2021 and testing was started from Mar. 30, 2021 and completed on Apr. 29, 2021. We, Sporton International Inc. EMC & Wireless Communications Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.

Louis Wu

Approved by: Louis Wu

Sporton International Inc. EMC & Wireless Communications Laboratory

No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C.)



Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
1 General Description	5
1.1 Product Feature of Equipment Under Test.....	5
1.2 Modification of EUT	5
1.3 Testing Location	6
1.4 Applicable Standards.....	6
2 Test Configuration of Equipment Under Test	7
2.1 Carrier Frequency and Channel	7
2.2 Test Mode.....	8
2.3 Connection Diagram of Test System.....	9
2.4 Support Unit used in test configuration and system	9
2.5 EUT Operation Test Setup	10
2.6 Measurement Results Explanation Example.....	10
3 Test Result	11
3.1 6dB and 26dB and 99% Occupied Bandwidth Measurement	11
3.2 Maximum Conducted Output Power Measurement	14
3.3 Power Spectral Density Measurement	15
3.4 Unwanted Emissions Measurement.....	18
3.5 AC Conducted Emission Measurement.....	23
3.6 Automatically Discontinue Transmission	25
3.7 Antenna Requirements	27
4 List of Measuring Equipment.....	28
5 Uncertainty of Evaluation	30
Appendix A. Conducted Test Results	
Appendix B. AC Conducted Emission Test Result	
Appendix C. Radiated Spurious Emission	
Appendix D. Radiated Spurious Emission Plots	
Appendix E. Duty Cycle Plots	
Appendix F. Setup Photographs	



History of this test report

Report No.	Version	Description	Issued Date
FR130215E	01	Initial issue of report	May 18, 2021



Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.1	15.403(i)	6dB & 26dB Bandwidth	Pass	-
3.1	2.1049	99% Occupied Bandwidth	Reporting only	-
3.2	15.407(a)	Maximum Conducted Output Power	Pass	-
3.3	15.407(a)	Power Spectral Density	Pass	-
3.4	15.407(b)	Unwanted Emissions	Pass	Under limit 6.52 dB at 30.000 MHz
3.5	15.207	AC Conducted Emission	Pass	Under limit 15.13 dB at 0.152 MHz
3.6	15.407(c)	Automatically Discontinue Transmission	Pass	-
3.7	15.203 15.407(a)	Antenna Requirement	Pass	-

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

Reviewed by: Wii Chang

Report Producer: Celery Wei



1 General Description

1.1 Product Feature of Equipment Under Test

Bluetooth, Wi-Fi 2.4GHz 802.11b/g/n and Wi-Fi 5GHz 802.11a/n/ac

Product Specification subjective to this standard	
Antenna Type	WLAN <Ant. 1>: PIFA Antenna <Ant. 2>: PIFA Antenna Bluetooth: PIFA Antenna

Antenna information		
5725 MHz ~ 5850 MHz	Peak Gain (dBi)	Ant. 1: 6.1 Ant. 2: 6.0

Remark: The above EUT's information was declared by manufacturer. Please refer to Comments and Explanations in report summary.

1.2 Modification of EUT

No modifications are made to the EUT during all test items.



1.3 Testing Location

Test Site	Sporton International Inc. EMC & Wireless Communications Laboratory
Test Site Location	No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C.) TEL: +886-3-327-3456 FAX: +886-3-328-4978
Test Site No.	Sporton Site No. TH02-HY, CO05-HY, 03CH07-HY, DFS02-HY

Note: The test site complies with ANSI C63.4 2014 requirement.

FCC designation No.: TW1190

1.4 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart E
- ♦ FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
- ♦ FCC KDB 414788 D01 Radiated Test Site v01r01.
- ♦ FCC KDB 662911 D01 Multiple Transmitter Output v02r01.
- ♦ ANSI C63.10-2013

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. The TAF code is not including all the FCC KDB listed without accreditation.
3. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



2 Test Configuration of Equipment Under Test

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in two config (Panel Setting Tilt and Panel Setting Upright). The worst cases (Panel Setting Upright) were recorded in this report.

- b. AC power line Conducted Emission was tested under maximum output power.

2.1 Carrier Frequency and Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
5725-5850 MHz Band 4 (U-NII-3)	149	5745	157	5785
	151*	5755	159*	5795
	153	5765	161	5805
	155#	5775	165	5825

Note:

- 1. The above Frequency and Channel in "*" were 802.11n HT40 and 802.11ac VHT40.
- 2. The above Frequency and Channel in "#n" were 802.11ac VHT80.



2.2 Test Mode

Final test modes are considering the modulation and worse data rates as below table.

MIMO Mode


Modulation	Data Rate
802.11a	6 Mbps
802.11n HT20 (Covered by VHT20)	MCS0
802.11n HT40 (Covered by VHT40)	MCS0
802.11ac VHT20	MCS0
802.11ac VHT40	MCS0
802.11ac VHT80	MCS0

Test Cases	
AC Conducted Emission	Mode 1 :Bluetooth Link + WLAN (5GHz) Link + Camera + Portable Device (USB Type C Charging) + AC Adapter 1
Remark: For Radiated Test Cases, the tests were performed with Adapter 1.	

Ch. #	Band IV : 5725-5850 MHz			
	802.11a	802.11ac VHT20	802.11ac VHT40	802.11ac VHT80
L Low	149	149	151	-
M Middle	157	157	-	155
H High	165	165	159	-

Remark: For radiation spurious emission, the final modulation and the worst data rate was reference the max RF conducted power.

2.3 Connection Diagram of Test System

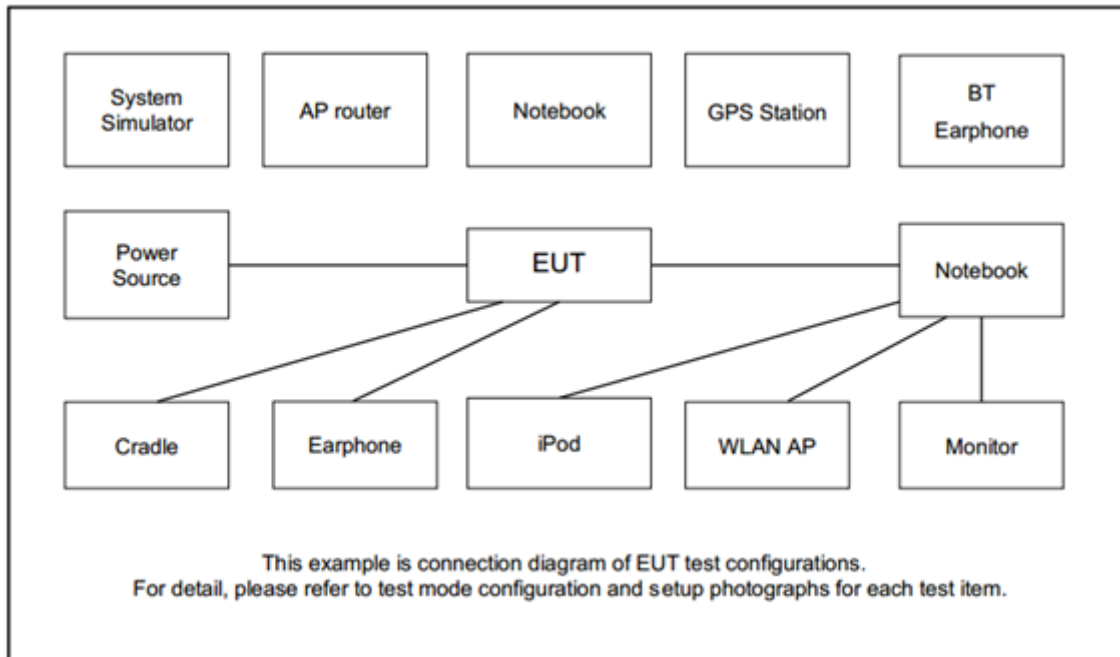

2.4 Support Unit used in test configuration and system

Item	Equipment	Brand Name	Model Name	FCC ID	Data Cable	Power Cord
1.	Bluetooth Earphone	Sony Ericsson	MW600	PY7DDA-2029	N/A	N/A
2.	WLAN AP	ASUS	RT-AC66U	MSQ-RTAC66U	N/A	Unshielded, 1.8 m
3.	Notebook	Dell	Latitude E6320	FCC DoC/ Contains FCC ID: QDS-BRCM1054	N/A	AC I/P : Unshielded, 1.2m DC O/P : Shielded, 1.8m
4.	Phone	SAMSUNG	SM-A730F/DS	A3LSMA730F	Shielded, 1.0m	N/A



2.5 EUT Operation Test Setup

The RF test items, utility “QRCT 4 Version4.0.00147.0” was installed in Notebook which was programmed in order to make the EUT get into the engineering modes to provide channel selection, power level, data rate and the application type and for continuous transmitting signals.

2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 4.2 dB and 10 dB attenuator.

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)}. \\ &= 4.2 + 10 = 14.2 \text{ (dB)} \end{aligned}$$

3 Test Result

3.1 6dB and 26dB and 99% Occupied Bandwidth Measurement

3.1.1 Description of 6dB and 26dB and 99% Occupied Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.

26dB and 99% Occupied bandwidth are reporting only.


3.1.2 Measuring Instruments

See list of measuring equipment of this test report.

3.1.3 Test Procedures



1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01. Section C) Emission bandwidth for the band 5.725-5.85 GHz
2. Set RBW = 100 kHz.
3. Set the VBW $\geq 3 \times$ RBW.
4. Detector = Peak.
5. Trace mode = max hold
6. Measure the maximum width of the emission that is 6 dB down from the peak of the emission.
7. Measure and record the results in the test report.


3.1.4 Test Setup

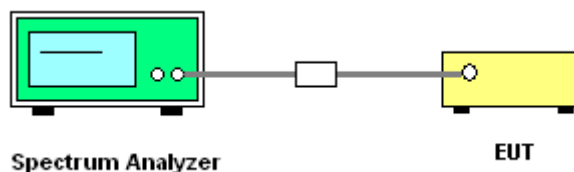

3.1.5 Test Result of 6dB and 26dB and 99% Occupied Bandwidth

Please refer to Appendix A.

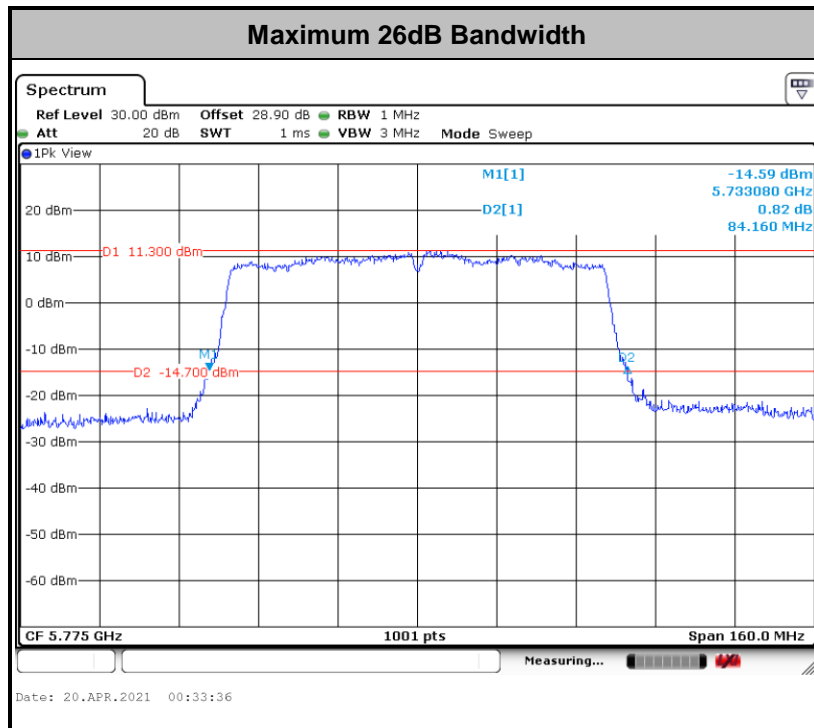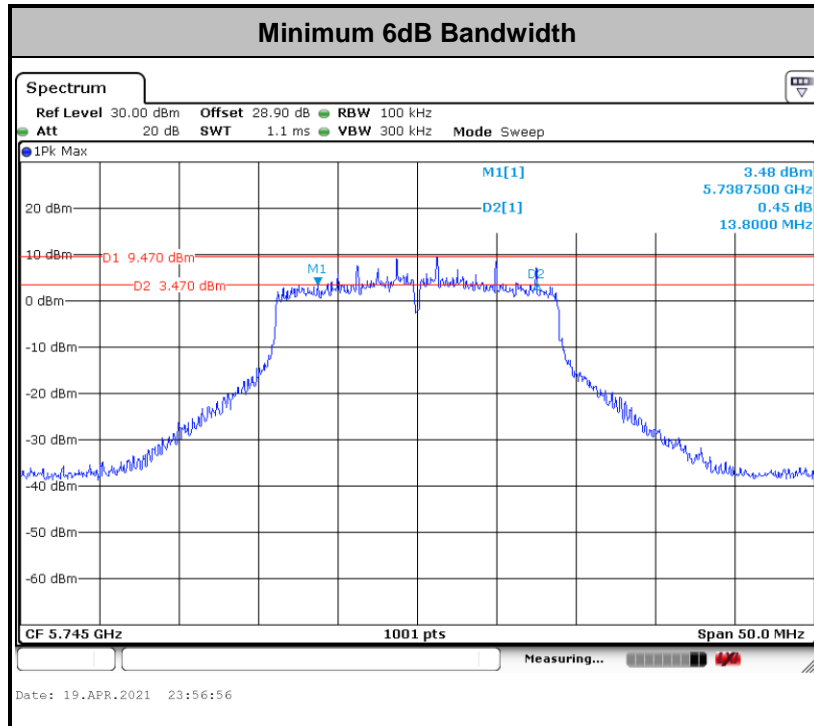

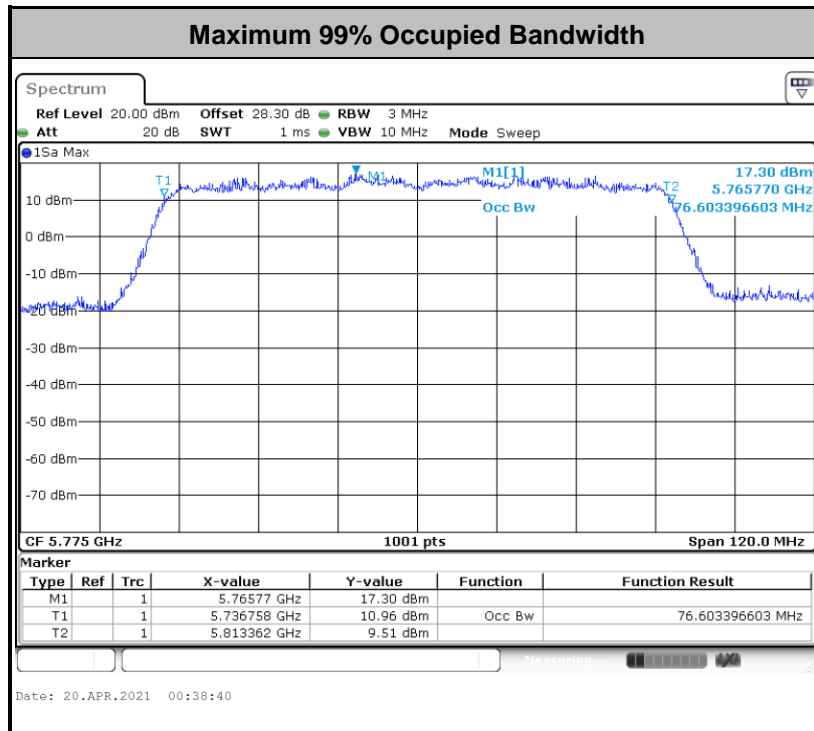

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

3.2 Maximum Conducted Output Power Measurement

3.2.1 Limit of Maximum Conducted Output Power

For the band 5.725–5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.2.2 Measuring Instruments

See list of measuring equipment of this test report.


3.2.3 Test Procedures

The testing follows Method PM-G of FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.

Method PM-G (Measurement using a gated RF average power meter):

1. Measurement is performed using a wideband RF power meter.
2. The EUT is configured to transmit at its maximum power control level.
3. Measure the average power of the transmitter.
4. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

3.2.4 Test Setup

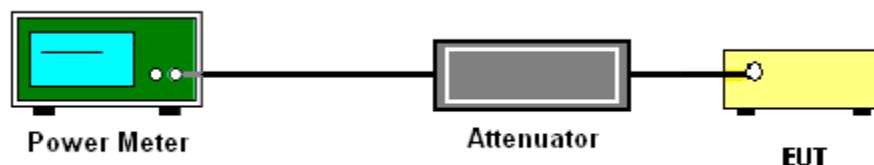

3.2.5 Test Result of Maximum Conducted Output Power

Please refer to Appendix A.



3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

For the band 5.725–5.85 GHz, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.3.2 Measuring Instruments

See list of measuring equipment of this test report.

3.3.3 Test Procedures

The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01. Section F) Maximum power spectral density.

Method SA-3


(power averaging (rms) detection with max hold):

- Set span to encompass the entire emission bandwidth (EBW) of the signal.
 - Set RBW = 1 MHz.
 - Set VBW \geq 3 MHz.
 - Number of points in sweep \geq 2 Span / RBW.
 - Sweep time \leq (number of points in sweep) \times T, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.
Detector = power averaging (rms).
 - Trace mode = max hold.
 - Allow max hold to run for at least 60 seconds, or longer as needed to allow the trace to stabilize.
1. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.
 2. Each plot has already offset with cable loss, and attenuator loss. Measure the PPSD and record it.
 3. For MIMO mode, calculation method follows FCC KDB 662911 D01 Multiple Transmitter Output v02r01.

Method (c): Measure and add $10 \log(N_{ANT})$ dB.



With this technique, spectrum measurements are performed at each output of the device, but rather than summing the spectra or the spectral peaks across the outputs, the quantity $10 \log(N_{ANT})$ dB is added to each spectrum value before comparing to the emission limit. The addition of $10 \log(N_{ANT})$ dB serves to apportion the emission limit among the N_{ANT} outputs so that each output is permitted to contribute no more than $1/N_{ANT}^{th}$ of the PSD limit.

3.3.4 Test Setup

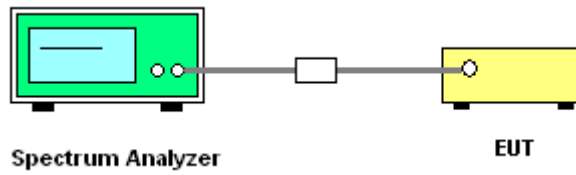

3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.

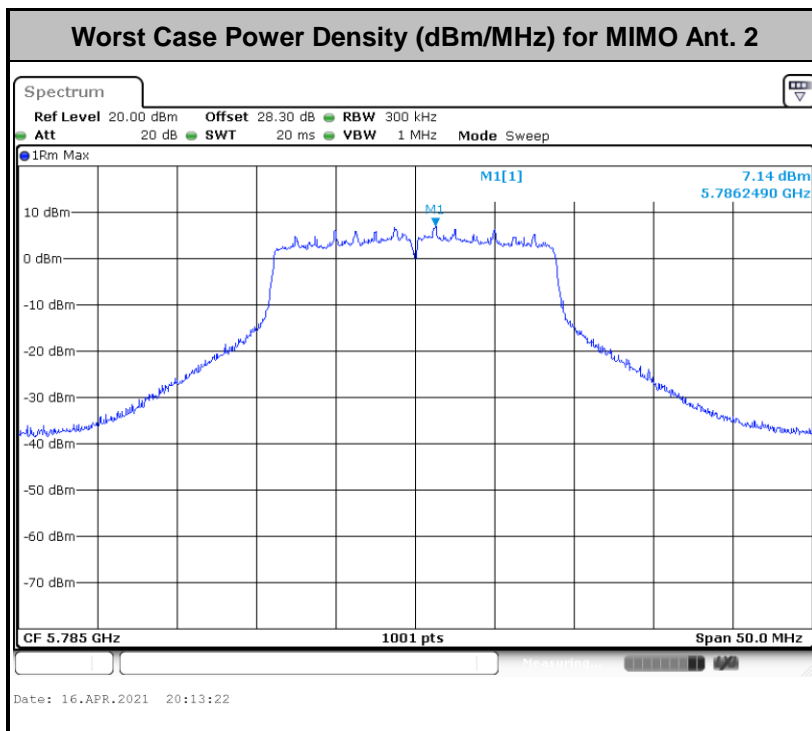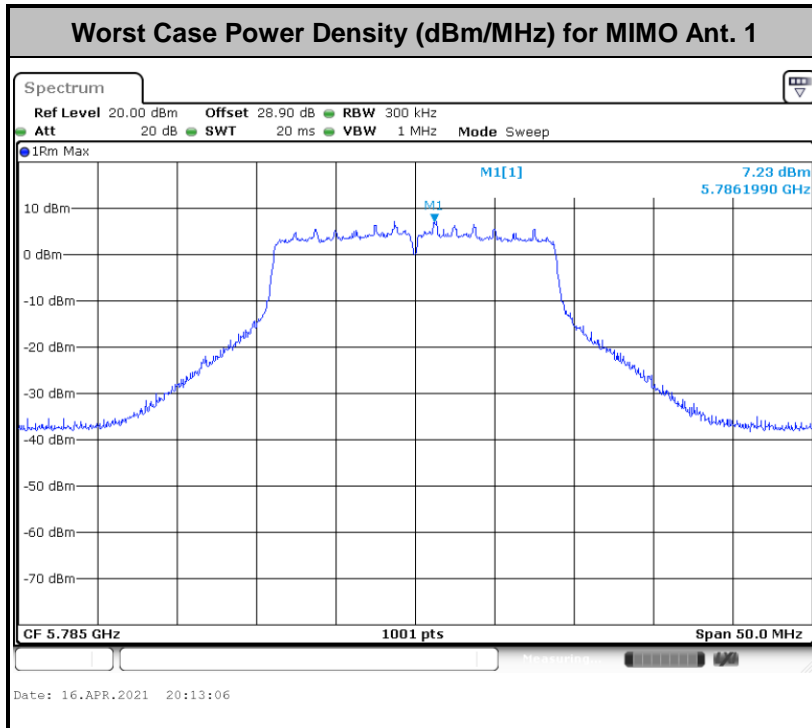



3.4 Unwanted Emissions Measurement

This section is to measure unwanted emissions through radiated measurement for band edge spurious emissions and out of band emissions measurement.

3.4.1 Limit of Unwanted Emissions

(1) For transmitters operating in the 5.725-5.85 GHz band:

15.407(b)(4)(i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

(2) Unwanted spurious emissions fallen in restricted bands shall comply with the general field strength limits as below table,

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

Note: The following formula is used to convert the EIRP to field strength.

$$E = \frac{1000000\sqrt{30P}}{3} \mu\text{V/m, where P is the eirp (Watts)}$$

EIRP (dBm)	Field Strength at 3m (dBμV/m)
- 27	68.3

(3) KDB789033 D02 v02r01 G)2)c)

(i) Sections 15.407(b)(1-3) specifies the unwanted emissions limit for the U-NII-1 and U-NII-2 bands. As specified, emissions above 1000 MHz that are outside of the restricted bands are subject to a peak emission limit of -27 dBm/MHz.

(ii) Section 15.407(b)(4) specifies the unwanted emissions limit for the U-NII-3 band. A band emissions mask is specified in Section 15.407(b)(4)(i). The emission limits are based on the use of a peak detector.



3.4.2 Measuring Instruments

See list of measuring equipment of this test report.


3.4.3 Test Procedures

1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01. Section G) Unwanted emissions measurement.
 - (1) Procedure for Unwanted Emissions Measurements Below 1000 MHz
 - RBW = 120 kHz
 - VBW = 300 kHz
 - Detector = Peak
 - Trace mode = max hold
 - (2) Procedure for Peak Unwanted Emissions Measurements Above 1000 MHz
 - RBW = 1 MHz
 - VBW \geq 3 MHz
 - Detector = Peak
 - Sweep time = auto
 - Trace mode = max hold
 - (3) Procedures for Average Unwanted Emissions Measurements Above 1000 MHz
 - RBW = 1 MHz
 - VBW = 10 Hz, when duty cycle is no less than 98 percent.
 - VBW \geq 1/T, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.
2. The EUT was placed on a turntable with 0.8 meter for frequency below 1 GHz and 1.5 meter for frequency above 1 GHz respectively above ground.
3. The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
4. The antenna is a broadband antenna and its height is adjusted between one meter and four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
5. For each suspected emission, the EUT was arranged to its worst case and then adjust the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
6. For testing below 1 GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.


- For testing above 1 GHz, the emission level of the EUT in peak mode was 20 dB lower than average limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

3.4.4 Test Setup


For radiated emissions below 30MHz

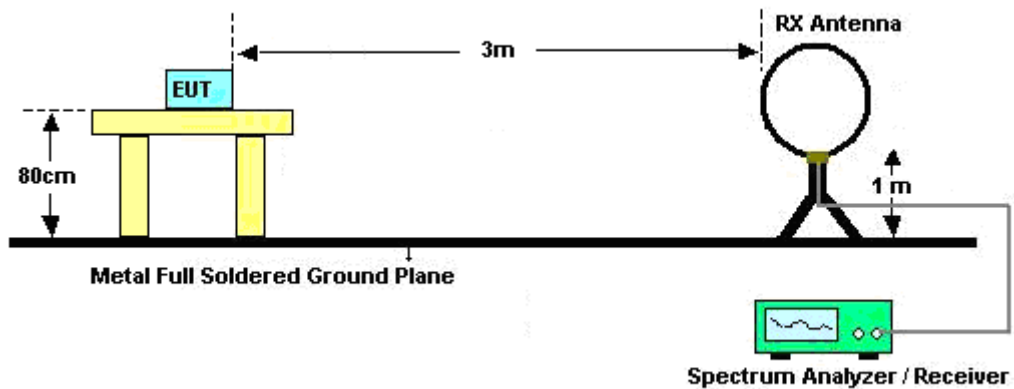


For radiated emissions from 30MHz to 1GHz

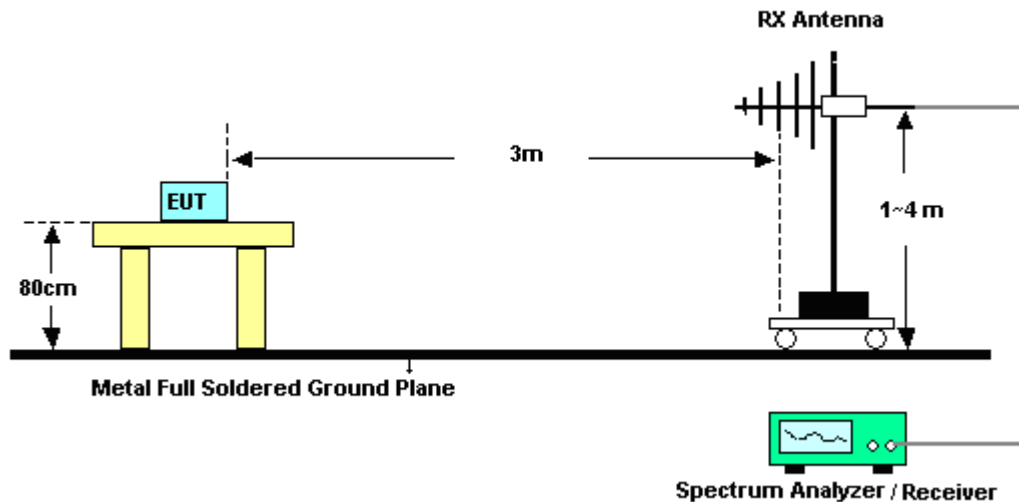

For radiated test from 1GHz to 18GHz

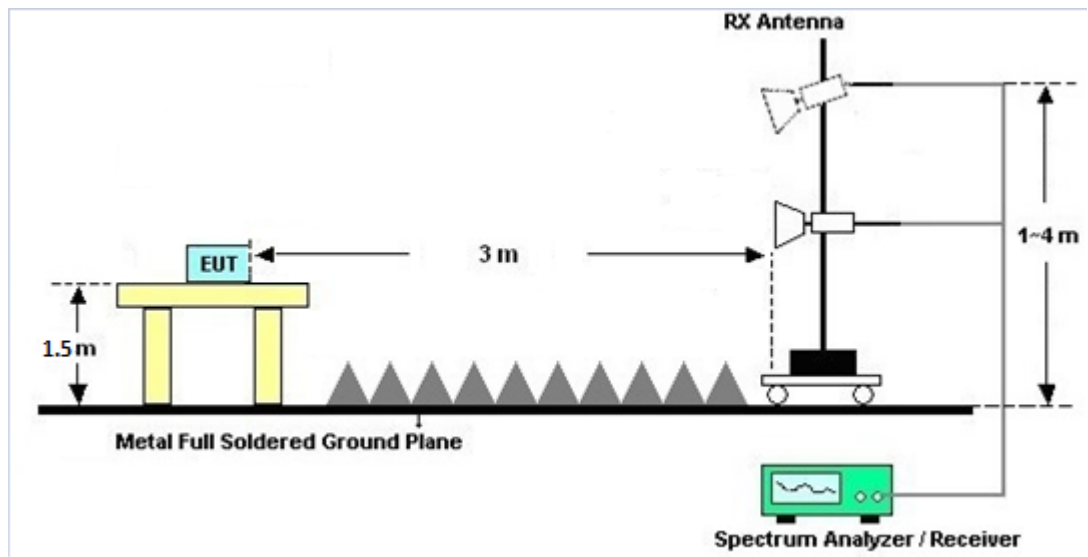

For radiated test above 18GHz

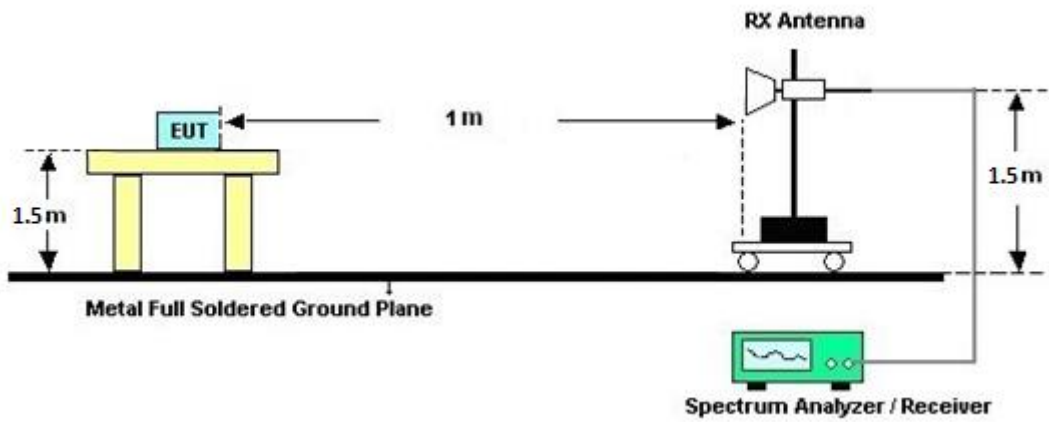



3.4.5 Test Results of Radiated Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and alternative test site - semi-Anechoic chamber according to 414788 D01 Radiated Test Site v01r01, and the result came out very similar.

3.4.6 Test Result of Radiated Band Edges

Please refer to Appendix C and D.

3.4.7 Duty Cycle

Please refer to Appendix E.

3.4.8 Test Result of Unwanted Radiated Emission (30MHz ~ 10th Harmonic)

Please refer to Appendix C and D.



3.5 AC Conducted Emission Measurement

3.5.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.5.2 Measuring Instruments

See list of measuring equipment of this test report.

3.5.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN shall be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.

3.5.4 Test Setup

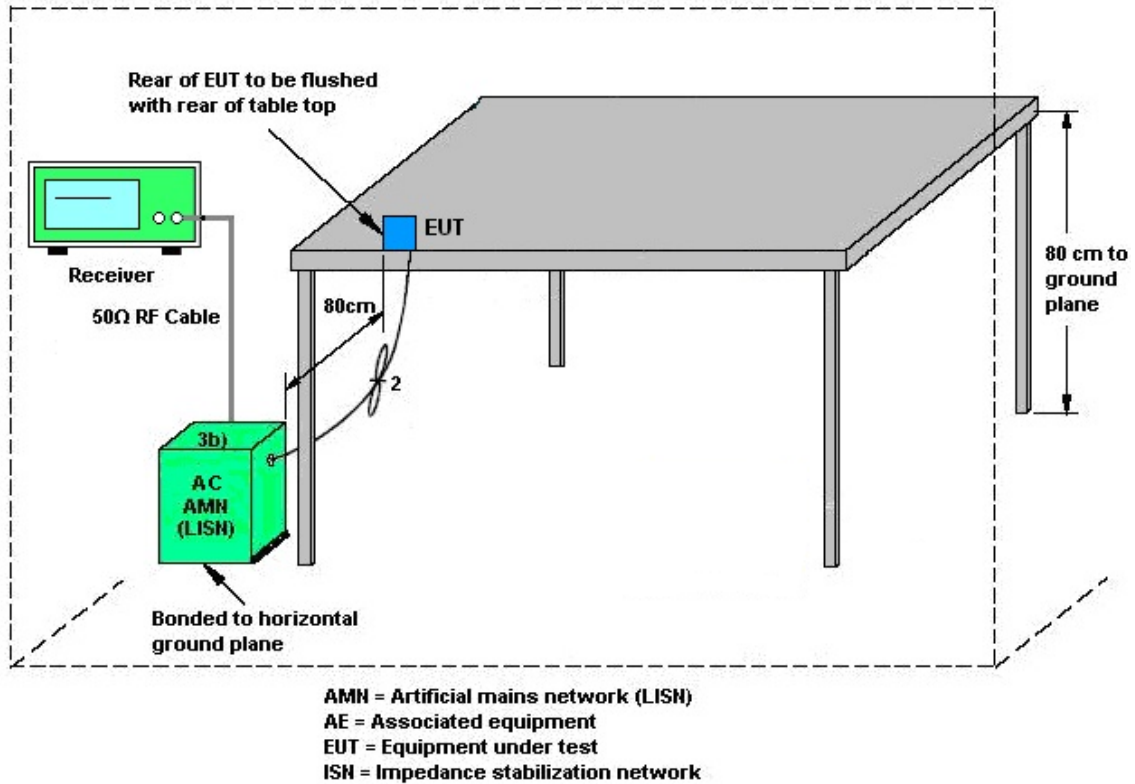

3.5.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



3.6 Automatically Discontinue Transmission

3.6.1 Limit of Automatically Discontinue Transmission

The device shall automatically discontinue transmission in case of either absence of information to transmit or operational failure. These provisions are not intended to preclude the transmission of control or signaling information or the use of repetitive codes used by certain digital technologies to complete frame or burst intervals. Applicants shall include in their application for equipment authorization to describe how this requirement is met.

3.6.2 Measuring Instruments

See list of measuring equipment of this test report.

3.6.3 Test Result of Automatically Discontinue Transmission


EUT is verified this characteristic during the function check of normal sample associated with an access point:

- A. Information start: make EUT supply information to the access point.
- B. Information stop: stop supplying information to the access point.

While the EUT is not transmitting any information, the EUT can automatically discontinue transmission and become standby mode for power saving.

- C. Information start: make EUT supply information to the access point again.

The EUT can detect the controlling signal of ACK message transmitting from remote device and verify whether it shall resend or discontinue transmission.

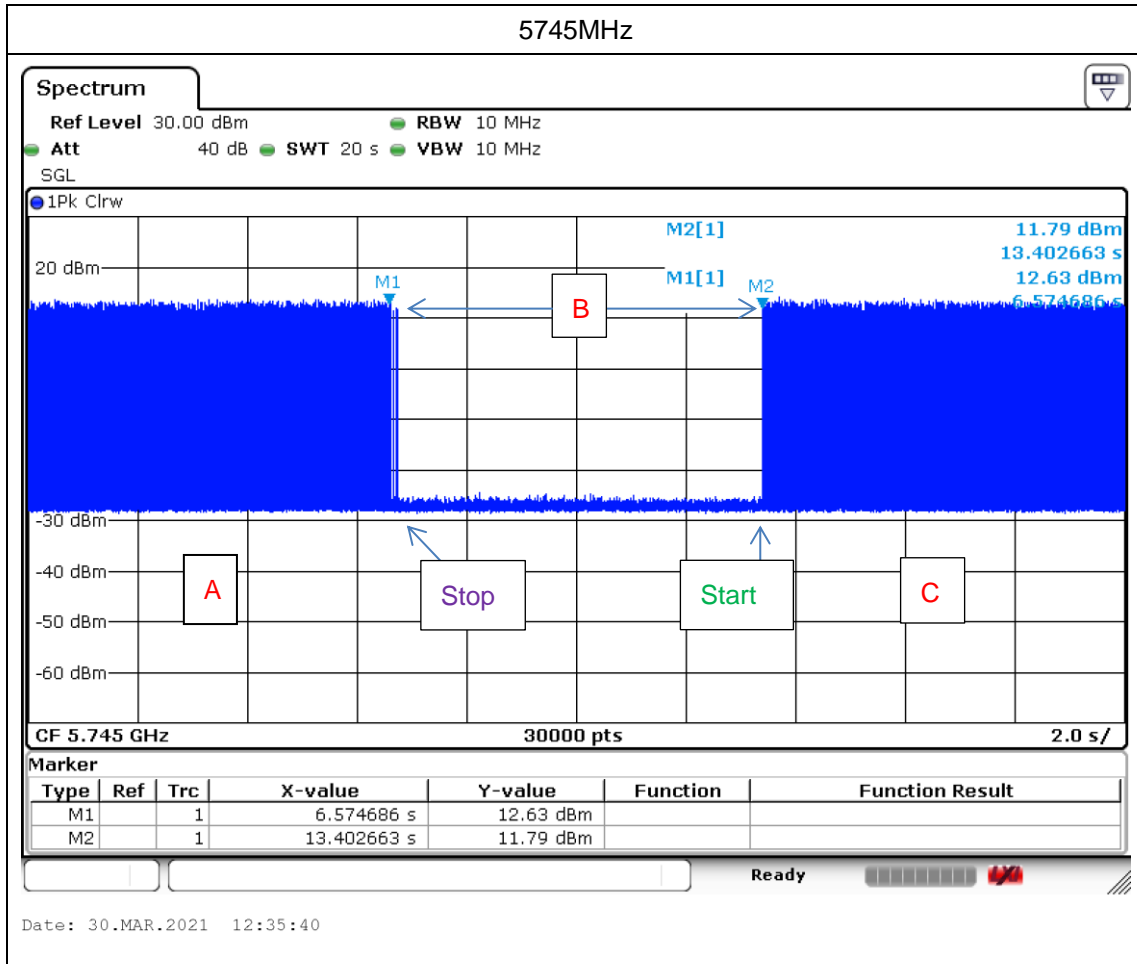

Note : The control / signalling information during the period B is precluded.



3.7 Antenna Requirements

3.7.1 Standard Applicable

If transmitting antenna directional gain is greater than 6 dBi, both the peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.7.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.7.3 Antenna Gain

<CDD Modes >

FCC KDB 662911 D01 Multiple Transmitter Output v02r01

For CDD transmissions, directional gain is calculated as

Directional gain = GANT + Array Gain, where Array Gain is as follows.

For power spectral density (PSD) measurements on all devices,

Array Gain = 10 log(NANT/NSS=1) dB.

For power measurements on IEEE 802.11 devices,

Array Gain = 0 dB (i.e., no array gain) for NANT ≤ 4.

Directional gain may be calculated by using the formulas applicable to equal gain antennas with GANT set equal to the gain of the antenna having the highest gain;

The EUT supports CDD mode.

For power, the directional gain GANT is set equal to the antenna having the highest gain, i.e., F)2)f)i).

For PSD, the directional gain calculation is following F)2)f)ii) of KDB 662911 D01 v02r01.

The power and PSD limit should be modified if the directional gain of EUT is over 6 dBi,

The directional gain "DG" is calculated as following table.

<CDD Modes>

	Ant. 1 (dBi)	Ant. 2 (dBi)	DG for Power (dBi)	DG for PSD (dBi)	Power Limit Reduction (dB)	PSD Limit Reduction (dB)
Band IV	6.10	6.00	6.10	9.06	0.10	3.06

Power Limit Reduction = DG(Power) – 6dBi, (min = 0)

PSD Limit Reduction = DG(PSD) – 6dBi, (min = 0)



4 List of Measuring Equipment

Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100315	9 kHz~30 MHz	Jan. 04, 2021	Apr. 02, 2021~ Apr. 27, 2021	Jan. 03, 2022	Radiation (03CH07-HY)
Bilog Antenna	TESEQ	CBL 6111D & 00800N1D01 N-06	35419 & 03	30MHz~1GHz	Apr. 29, 2020	Apr. 02, 2021~ Apr. 27, 2021	Apr. 28, 2021	Radiation (03CH07-HY)
Double Ridge Horn Antenna	ESCO	3117	00075962	1GHz ~ 18GHz	Dec. 01, 2020	Apr. 02, 2021~ Apr. 27, 2021	Nov. 30, 2021	Radiation (03CH07-HY)
SHF-EHF Horn Antenna	SCHWARZBE CK	BBHA 9170	BBHA9170 251	18GHz~40GHz	Dec. 02, 2020	Apr. 02, 2021~ Apr. 27, 2021	Dec. 01, 2021	Radiation (03CH07-HY)
Preamplifier	COM-POWER	PA-103A	161241	10MHz~1GHz	May 19, 2020	Apr. 02, 2021~ Apr. 27, 2021	May 18, 2021	Radiation (03CH07-HY)
Preamplifier	MITEQ	AMF-7D-0010 1800-30-10P	1590075	1GHz~18GHz	Apr. 23, 2020	Apr. 02, 2021~ Apr. 17, 2021	Apr. 22, 2021	Radiation (03CH07-HY)
Preamplifier	MITEQ	AMF-7D-0010 1800-30-10P	1590075	1GHz~18GHz	Apr. 22, 2021	Apr. 27, 2021	Apr. 21, 2022	Radiation (03CH07-HY)
Preamplifier	Agilent	8449B	3008A023 62	1GHz~26.5GHz	Oct. 31, 2020	Apr. 02, 2021~ Apr. 27, 2021	Oct. 30, 2021	Radiation (03CH07-HY)
Preamplifier	EMEC	EM18G40G	0600789	18-40GHz	Jul. 31, 2020	Apr. 02, 2021~ Apr. 27, 2021	Jul. 30, 2021	Radiation (03CH07-HY)
EMI Test Receiver	Agilent	N9038A (MXE)	MY532900 53	20Hz~26.5GHz	May 21, 2020	Apr. 02, 2021~ Apr. 27, 2021	May 20, 2021	Radiation (03CH07-HY)
Spectrum Analyzer	Agilent	N9030A	MY523502 76	3Hz~44GHz	Jun. 09, 2020	Apr. 02, 2021~ Apr. 27, 2021	Jun. 08, 2021	Radiation (03CH07-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY15682- 4	30MHz to 18GHz	Feb. 24, 2021	Apr. 02, 2021~ Apr. 27, 2021	Feb. 23, 2022	Radiation (03CH07-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY24971- 4	9kHz to 18GHz	Feb. 24, 2021	Apr. 02, 2021~ Apr. 27, 2021	Feb. 23, 2022	Radiation (03CH07-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY28655- 4	9kHz to 18GHz	Feb. 24, 2021	Apr. 02, 2021~ Apr. 27, 2021	Feb. 23, 2022	Radiation (03CH07-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	MY2858/2, 801606/2	18GHz~40GHz	Feb. 24, 2021	Apr. 02, 2021~ Apr. 27, 2021	Feb. 23, 2022	Radiation (03CH07-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 126	532078/12 6E	30MHz~18GHz	Sep. 18, 2020	Apr. 02, 2021~ Apr. 27, 2021	Sep. 17, 2021	Radiation (03CH07-HY)
Antenna Mast	Max-Full	MFA520BS	N/A	1m~4m	N/A	Apr. 02, 2021~ Apr. 27, 2021	N/A	Radiation (03CH07-HY)
Turn Table	ChainTek	Chaintek 3000	N/A	0~360 Degree	N/A	Apr. 02, 2021~ Apr. 27, 2021	N/A	Radiation (03CH07-HY)
Software	Audix	E3 6.2009-8-24	N/A	N/A	N/A	Apr. 02, 2021~ Apr. 27, 2021	N/A	Radiation (03CH07-HY)
USB Data Logger	TECPEL	TR-32	HE17XB24 95	N/A	N/A	Apr. 02, 2021~ Apr. 27, 2021	N/A	Radiation (03CH07-HY)



Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Hygrometer	Testo	608-H1	34893241	N/A	Mar. 03, 2021	Apr. 01, 2021~ Apr. 29, 2021	Mar. 02, 2022	Conducted (TH02-HY)
Power Sensor	DARE	RPR3006W	16I00054S NO10	10MHz~6GHz	Dec. 16, 2020	Apr. 01, 2021~ Apr. 29, 2021	Dec. 15, 2021	Conducted (TH02-HY)
Signal Analyzer	Rohde & Schwarz	FSV40	101566	10Hz ~ 40GHz	Jul. 22, 2020	Apr. 01, 2021~ Apr. 29, 2021	Jul. 21, 2021	Conducted (TH02-HY)
Switch Box & RF Cable	EM Electronics	EMSW18SE	SW200302	N/A	Mar. 17, 2021	Apr. 01, 2021~ Apr. 29, 2021	Mar. 16, 2022	Conducted (TH02-HY)
Signal Analyzer	Rohde & Schwarz	FSV30	100895	9kHz~30GHz	May 29, 2020	Mar. 30, 2021	May 28, 2021	DFS (DFS02-HY)
AC Power Source	ChainTek	APC-1000W	N/A	N/A	N/A	Mar. 31, 2021	N/A	Conduction (CO05-HY)
EMI Test Receiver	Rohde & Schwarz	ESR3	102388	9kHz~3.6GHz	Nov. 30, 2020	Mar. 31, 2021	Nov. 29, 2021	Conduction (CO05-HY)
Hygrometer	Testo	608-H1	34913912	N/A	Nov. 18, 2020	Mar. 31, 2021	Nov. 17, 2021	Conduction (CO05-HY)
LISN	Rohde & Schwarz	ENV216	100081	9kHz~30MHz	Nov. 16, 2020	Mar. 31, 2021	Nov. 15, 2021	Conduction (CO05-HY)
Software	Rohde & Schwarz	EMC32 V10.30	N/A	N/A	N/A	Mar. 31, 2021	N/A	Conduction (CO05-HY)
Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100851	N/A	Feb. 25, 2021	Mar. 31, 2021	Feb. 24, 2022	Conduction (CO05-HY)
LISN Cable	MVE	RG-400	260260	N/A	Dec. 31, 2020	Mar. 31, 2021	Dec. 30, 2021	Conduction (CO05-HY)



5 Uncertainty of Evaluation

Uncertainty of Conducted Emission Measurement (150kHz ~ 30MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.3
---	-----

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.7
---	-----

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.3
---	-----

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.0
---	-----

Appendix A. Test Result of Conducted Test Items

Test Engineer:	Junyu Jhou	Temperature:	22.4~22.9	°C
Test Date:	2021/4/1~2021/4/20	Relative Humidity:	49.8~57.2	%

TEST RESULTS DATA
6dB and 26dB EBW and 99% OBW

Band IV MIMO												
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Bandwidth (MHz)		26dB Bandwidth (MHz)		6 dB Bandwidth (MHz)		6 dB Bandwidth Min. Limit (MHz)	Pass/Fail
					Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2		
11a	6Mbps	2	149	5745	16.78	16.73	24.65	24.15	15.90	16.00	0.5	Pass
11a	6Mbps	2	157	5785	16.78	16.73	25.10	25.00	15.65	15.45	0.5	Pass
11a	6Mbps	2	165	5825	16.73	16.63	24.45	24.05	15.55	15.70	0.5	Pass
VHT20	MCS0	2	149	5745	17.83	17.93	26.25	26.25	13.80	13.85	0.5	Pass
VHT20	MCS0	2	157	5785	17.98	18.03	26.55	27.00	15.35	15.70	0.5	Pass
VHT20	MCS0	2	165	5825	17.88	17.83	26.50	25.70	13.90	13.90	0.5	Pass
VHT40	MCS0	2	151	5755	36.56	36.56	42.21	41.67	35.73	35.46	0.5	Pass
VHT40	MCS0	2	159	5795	36.56	36.56	42.39	42.03	35.28	35.64	0.5	Pass
VHT80	MCS0	2	155	5775	76.36	76.60	84.16	83.68	75.20	75.20	0.5	Pass

TEST RESULTS DATA
Average Power Table

Band IV MIMO												
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Average Conducted Power (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		Pass/Fail
					Ant 1	Ant 2	SUM	Ant 1	Ant 2	Ant 1	Ant 2	
11a	6Mbps	2	149	5745	18.10	17.40	20.77	29.90		6.10		Pass
11a	6Mbps	2	157	5785	18.40	18.00	21.21	29.90		6.10		Pass
11a	6Mbps	2	165	5825	17.40	16.70	20.07	29.90		6.10		Pass
HT20	MCS0	2	149	5745	17.70	17.40	20.56	29.90		6.10		Pass
HT20	MCS0	2	157	5785	18.20	18.00	21.11	29.90		6.10		Pass
HT20	MCS0	2	165	5825	17.40	16.70	20.07	29.90		6.10		Pass
HT40	MCS0	2	151	5755	18.10	18.00	21.06	29.90		6.10		Pass
HT40	MCS0	2	159	5795	18.80	18.30	21.57	29.90		6.10		Pass
VHT20	MCS0	2	149	5745	18.60	18.40	21.51	29.90		6.10		Pass
VHT20	MCS0	2	157	5785	19.20	18.80	22.01	29.90		6.10		Pass
VHT20	MCS0	2	165	5825	18.10	17.60	20.87	29.90		6.10		Pass
VHT40	MCS0	2	151	5755	19.00	18.90	21.96	29.90		6.10		Pass
VHT40	MCS0	2	159	5795	19.70	19.20	22.47	29.90		6.10		Pass
VHT80	MCS0	2	155	5775	19.00	18.70	21.86	29.90		6.10		Pass

TEST RESULTS DATA
Power Spectral Density

Band IV MIMO														
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	10log (500kHz /RBW) Factor (dB)		Average Power Density (dBm/500kHz)			Average PSD Limit (dBm/500kHz)		DG (dBi)		Pass /Fail
					Ant 1	Ant 2	Ant 1	Ant 2	SUM	Ant 1	Ant 2	Ant 1	Ant 2	
11a	6Mbps	2	149	5745	2.22		8.18	8.00	11.19	26.94		9.06		Pass
11a	6Mbps	2	157	5785	2.22		8.50	8.66	11.67	26.94		9.06		Pass
11a	6Mbps	2	165	5825	2.22		7.49	7.26	10.50	26.94		9.06		Pass
VHT20	MCS0	2	149	5745	2.22		9.43	8.79	12.44	26.94		9.06		Pass
VHT20	MCS0	2	157	5785	2.22		9.45	9.36	12.46	26.94		9.06		Pass
VHT20	MCS0	2	165	5825	2.22		8.69	7.95	11.70	26.94		9.06		Pass
VHT40	MCS0	2	151	5755	2.22		5.76	5.51	8.77	26.94		9.06		Pass
VHT40	MCS0	2	159	5795	2.22		6.08	5.84	9.09	26.94		9.06		Pass
VHT80	MCS0	2	155	5775	2.22		3.22	3.78	6.79	26.94		9.06		Pass

Note: PSD Sum = Max PSD(Ant. 1, Ant. 2) + 10 log (n)




Appendix B. AC Conducted Emission Test Results

Test Engineer :	Tom Lee	Temperature :	23~26°C
		Relative Humidity :	40~50%

EUT Information

Report NO : 130215
 Test Mode : Mode 1
 Test Voltage : 120Vac/60Hz
 Phase : Line

Full Spectrum

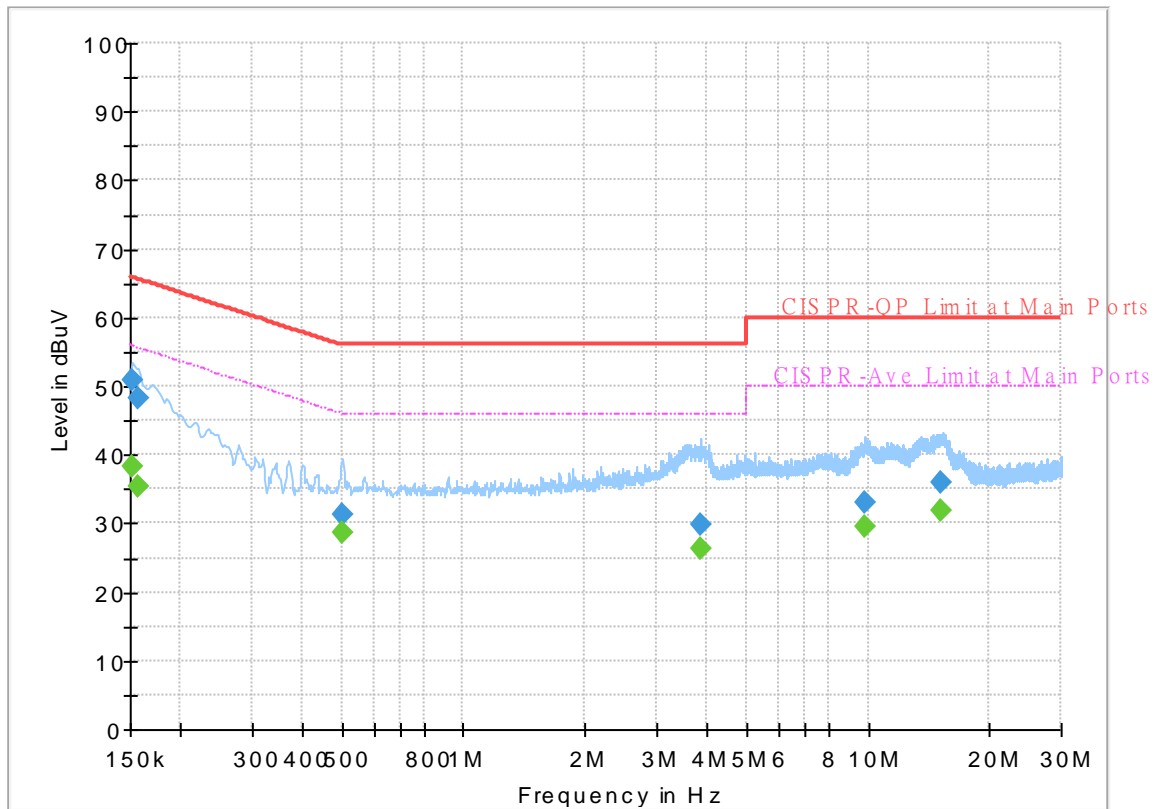


Final_Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.152250	---	38.33	55.88	17.55	L1	OFF	19.7
0.152250	50.75	---	65.88	15.13	L1	OFF	19.7
0.156750	---	35.44	55.63	20.19	L1	OFF	19.7
0.156750	48.11	---	65.63	17.52	L1	OFF	19.7
0.501000	---	28.73	46.00	17.27	L1	OFF	19.9
0.501000	31.42	---	56.00	24.58	L1	OFF	19.9
3.842250	---	26.32	46.00	19.68	L1	OFF	20.1
3.842250	29.80	---	56.00	26.20	L1	OFF	20.1
9.793500	---	29.67	50.00	20.33	L1	OFF	20.2
9.793500	33.18	---	60.00	26.82	L1	OFF	20.2
15.137250	---	31.89	50.00	18.11	L1	OFF	20.4
15.137250	36.01	---	60.00	23.99	L1	OFF	20.4

EUT Information

Report NO : 130215
 Test Mode : Mode 1
 Test Voltage : 120Vac/60Hz
 Phase : Neutral

Full Spectrum

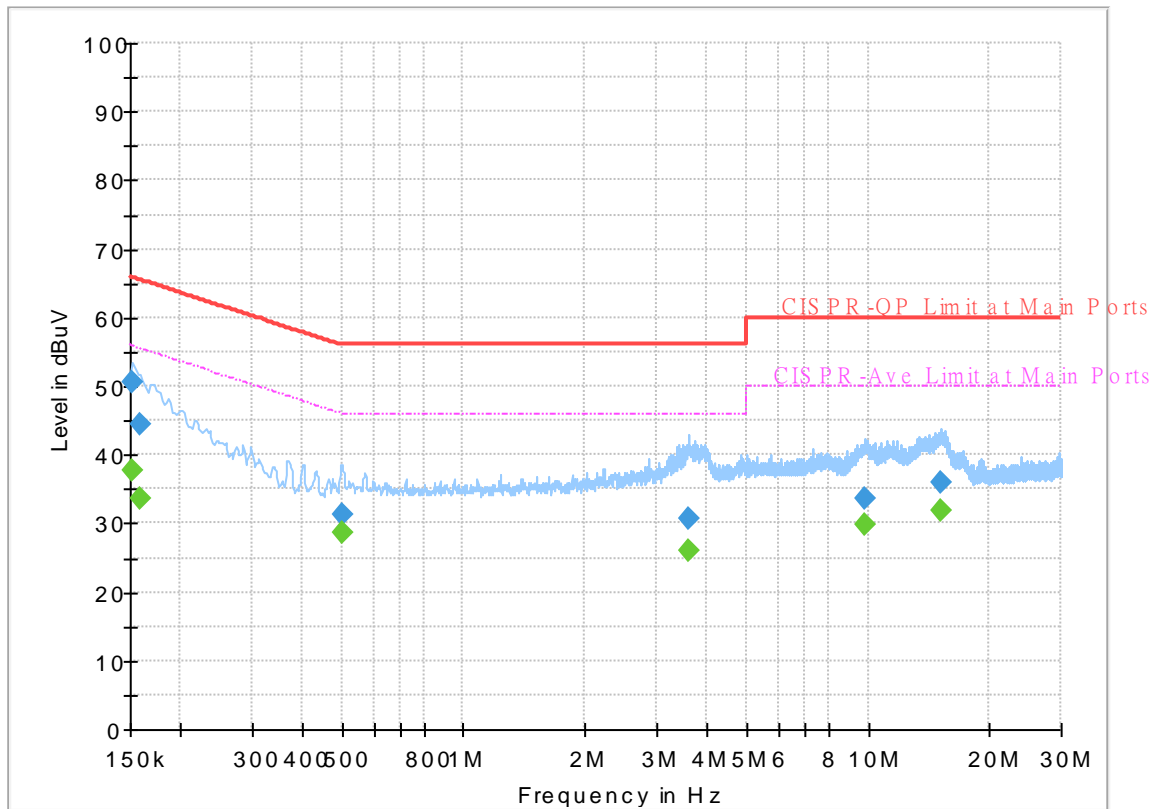

Final_Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.152250	---	37.74	55.88	18.14	N	OFF	19.7
0.152250	50.46	---	65.88	15.42	N	OFF	19.7
0.159000	---	33.51	55.52	22.01	N	OFF	19.7
0.159000	44.33	---	65.52	21.19	N	OFF	19.7
0.501000	---	28.57	46.00	17.43	N	OFF	19.9
0.501000	31.22	---	56.00	24.78	N	OFF	19.9
3.590250	---	25.94	46.00	20.06	N	OFF	20.1
3.590250	30.57	---	56.00	25.43	N	OFF	20.1
9.818250	---	29.70	50.00	20.30	N	OFF	20.2
9.818250	33.62	---	60.00	26.38	N	OFF	20.2
15.072000	---	31.87	50.00	18.13	N	OFF	20.4
15.072000	36.07	---	60.00	23.93	N	OFF	20.4



Appendix C. Radiated Spurious Emission

Test Engineer :	Jesse Wang, Stan Hsieh, Ken Wu and James Chiu	Temperature :	22.7~24.6°C
		Relative Humidity :	51.6~57.5%

Band 4 - 5725~5850MHz
WIFI 802.11a (Band Edge @ 3m)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)	
802.11a CH 149 5745MHz		5613.8	49.06	-19.14	68.2	37.11	34.8	12.29	35.14	400	329	P	H	
		5698.8	52.77	-51.55	104.32	40.85	34.7	12.38	35.16	400	329	P	H	
		5717.8	62.93	-47.25	110.18	50.99	34.7	12.4	35.16	400	329	P	H	
		5722.6	63.56	-53.17	116.73	51.62	34.7	12.4	35.16	400	329	P	H	
	*	5745	115.59	-	-	103.64	34.7	12.42	35.17	400	329	P	H	
	*	5745	108.06	-	-	96.11	34.7	12.42	35.17	400	329	A	H	
														H
														H
			5636.4	47.6	-20.6	68.2	35.83	34.6	12.32	35.15	100	49	P	V
			5699	52.1	-52.36	104.46	40.18	34.7	12.38	35.16	100	49	P	V
			5717.8	59.16	-51.02	110.18	47.22	34.7	12.4	35.16	100	49	P	V
			5722.2	62.21	-53.61	115.82	50.27	34.7	12.4	35.16	100	49	P	V
	*		5745	113.54	-	-	101.59	34.7	12.42	35.17	100	49	P	V
	*		5745	106.14	-	-	94.19	34.7	12.42	35.17	100	49	A	V
														V
													V	



WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)	
802.11a CH 157 5785MHz		5642.8	47.79	-20.41	68.2	36.02	34.6	12.32	35.15	376	336	P	H	
		5663.8	48.26	-30.18	78.44	36.57	34.5	12.34	35.15	376	336	P	H	
		5712.2	51.56	-57.06	108.62	39.63	34.7	12.39	35.16	376	336	P	H	
		5721.2	49.45	-64.09	113.54	37.51	34.7	12.4	35.16	376	336	P	H	
	*	5785	115.11	-	-	103.05	34.77	12.46	35.17	376	336	P	H	
	*	5785	107.46	-	-	95.4	34.77	12.46	35.17	376	336	A	H	
		5852.4	50.93	-65.8	116.73	38.7	34.9	12.51	35.18	376	336	P	H	
		5864.8	51.71	-56.34	108.05	39.48	34.9	12.52	35.19	376	336	P	H	
		5878.6	50.39	-52.14	102.53	38.15	34.9	12.53	35.19	376	336	P	H	
		5946.6	50.12	-18.08	68.2	37.74	35	12.58	35.2	376	336	P	H	
														H
														H
			5644.2	48.63	-19.57	68.2	36.86	34.6	12.32	35.15	100	51	P	V
			5653.8	49.3	-21.72	71.02	37.62	34.5	12.33	35.15	100	51	P	V
			5711.8	49.9	-58.61	108.51	37.97	34.7	12.39	35.16	100	51	P	V
			5724.2	49.88	-70.5	120.38	37.94	34.7	12.4	35.16	100	51	P	V
	*		5785	113.16	-	-	101.1	34.77	12.46	35.17	100	51	P	V
	*		5785	105.46	-	-	93.4	34.77	12.46	35.17	100	51	A	V
			5852.6	50.92	-65.35	116.27	38.69	34.9	12.51	35.18	100	51	P	V
			5858.8	50.35	-59.38	109.73	38.12	34.9	12.52	35.19	100	51	P	V
		5880.8	50.18	-50.71	100.89	37.94	34.9	12.53	35.19	100	51	P	V	
		5940.2	49.04	-19.16	68.2	36.67	35	12.57	35.2	100	51	P	V	
													V	
													V	



WiFi Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)	
802.11a CH 165 5825MHz	*	5825	115.73	-	-	103.54	34.87	12.5	35.18	389	327	P	H	
	*	5825	107.62	-	-	95.43	34.87	12.5	35.18	389	327	A	H	
		5852.6	59.7	-56.57	116.27	47.47	34.9	12.51	35.18	389	327	P	H	
		5857.2	57.59	-52.59	110.18	45.35	34.9	12.52	35.18	389	327	P	H	
		5877.6	53.11	-50.16	103.27	40.87	34.9	12.53	35.19	389	327	P	H	
		5949	51.5	-16.7	68.2	39.12	35	12.58	35.2	389	327	P	H	
														H
														H
	*	5825	112.99	-	-	100.8	34.87	12.5	35.18	100	50	P	V	
	*	5825	105.28	-	-	93.09	34.87	12.5	35.18	100	50	A	V	
		5852.4	55.99	-60.74	116.73	43.76	34.9	12.51	35.18	100	50	P	V	
		5862.8	52.96	-55.65	108.61	40.73	34.9	12.52	35.19	100	50	P	V	
		5881.8	51.24	-48.91	100.15	39	34.9	12.53	35.19	100	50	P	V	
		5927	50.05	-18.15	68.2	37.72	34.97	12.56	35.2	100	50	P	V	
														V
														V
														V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.													



Band 4 5725~5850MHz
WIFI 802.11a (Harmonic @ 3m)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11a CH 149 5745MHz		11490	45.45	-28.55	74	45.53	38.18	19.26	57.52	100	0	P	H
		17235	49.99	-18.21	68.2	39.97	41.43	24.9	56.31	100	0	P	H
													H
													H
		11490	44.71	-29.29	74	44.79	38.18	19.26	57.52	100	0	P	V
		17235	49.47	-18.73	68.2	39.45	41.43	24.9	56.31	100	0	P	V
													V
													V
802.11a CH 157 5785MHz		11570	44.39	-29.61	74	44.07	38.33	19.33	57.34	100	0	P	H
		17355	50.64	-17.56	68.2	40.43	41.55	25.01	56.35	100	0	P	H
													H
													H
		11570	44.07	-29.93	74	43.75	38.33	19.33	57.34	100	0	P	V
		17355	50.2	-18	68.2	39.99	41.55	25.01	56.35	100	0	P	V
													V
													V
802.11a CH 165 5825MHz		11650	44.8	-29.2	74	44.06	38.48	19.41	57.15	100	0	P	H
		17475	50.19	-18.01	68.2	39.8	41.67	25.1	56.38	100	0	P	H
													H
													H
		11650	45.93	-28.07	74	45.19	38.48	19.41	57.15	100	0	P	V
		17475	50.08	-18.12	68.2	39.69	41.67	25.1	56.38	100	0	P	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 4 5725~5850MHz
WIFI 802.11ac VHT20 (Band Edge @ 3m)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)	
802.11ac VHT20 CH 149 5745MHz		5645	48.54	-19.66	68.2	36.77	34.6	12.32	35.15	400	330	P	H	
		5699.8	52.02	-53.03	105.05	40.1	34.7	12.38	35.16	400	330	P	H	
		5719.4	60.47	-50.16	110.63	48.53	34.7	12.4	35.16	400	330	P	H	
		5725	69.05	-53.15	122.2	57.11	34.7	12.4	35.16	400	330	P	H	
	*	5745	116.46	-	-	104.51	34.7	12.42	35.17	400	330	P	H	
	*	5745	109.04	-	-	97.09	34.7	12.42	35.17	400	330	A	H	
														H
														H
			5649.8	47.85	-20.35	68.2	36.17	34.5	12.33	35.15	100	50	P	V
			5698.4	51.97	-52.05	104.02	40.05	34.7	12.38	35.16	100	50	P	V
			5719.6	61.43	-49.26	110.69	49.49	34.7	12.4	35.16	100	50	P	V
			5724.8	70.05	-51.69	121.74	58.11	34.7	12.4	35.16	100	50	P	V
	*		5745	113.71	-	-	101.76	34.7	12.42	35.17	100	50	P	V
	*		5745	105.56	-	-	93.61	34.7	12.42	35.17	100	50	A	V
														V
													V	



WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
		5628.2	49.24	-18.96	68.2	37.37	34.7	12.31	35.14	377	335	P	H
		5684	48.37	-45.03	93.4	36.47	34.7	12.36	35.16	377	335	P	H
		5713.8	49.82	-59.25	109.07	37.89	34.7	12.39	35.16	377	335	P	H
		5723.6	50.18	-68.83	119.01	38.24	34.7	12.4	35.16	377	335	P	H
	*	5785	115.56	-	-	103.5	34.77	12.46	35.17	377	335	P	H
	*	5785	107.76	-	-	95.7	34.77	12.46	35.17	377	335	A	H
		5850.2	50.28	-71.46	121.74	38.05	34.9	12.51	35.18	377	335	P	H
		5862.6	50.74	-57.93	108.67	38.51	34.9	12.52	35.19	377	335	P	H
		5891.8	50.52	-42.21	92.73	38.27	34.9	12.54	35.19	377	335	P	H
		5934.2	51.07	-17.13	68.2	38.73	34.97	12.57	35.2	377	335	P	H
802.11ac													H
VHT20													H
CH 157		5619.8	48.63	-19.57	68.2	36.77	34.7	12.3	35.14	100	52	P	V
5785MHz		5693.4	48.96	-51.37	100.33	37.05	34.7	12.37	35.16	100	52	P	V
		5717.4	49.16	-60.91	110.07	37.22	34.7	12.4	35.16	100	52	P	V
		5724	51.3	-68.62	119.92	39.36	34.7	12.4	35.16	100	52	P	V
	*	5785	113.86	-	-	101.8	34.77	12.46	35.17	100	52	P	V
	*	5785	106.39	-	-	94.33	34.77	12.46	35.17	100	52	A	V
		5853.8	50.95	-62.59	113.54	38.72	34.9	12.51	35.18	100	52	P	V
		5864.4	51	-57.17	108.17	38.77	34.9	12.52	35.19	100	52	P	V
		5880.2	50.28	-51.06	101.34	38.04	34.9	12.53	35.19	100	52	P	V
		5943.4	50.98	-17.22	68.2	38.61	35	12.57	35.2	100	52	P	V
													V
													V



WiFi Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)	
802.11ac VHT20 CH 165 5825MHz	*	5825	115.95	-	-	103.76	34.87	12.5	35.18	386	326	P	H	
	*	5825	108.48	-	-	96.29	34.87	12.5	35.18	386	326	A	H	
		5850.2	63.36	-58.38	121.74	51.13	34.9	12.51	35.18	386	326	P	H	
		5860.2	57.77	-51.57	109.34	45.54	34.9	12.52	35.19	386	326	P	H	
		5877.8	53.12	-50	103.12	40.88	34.9	12.53	35.19	386	326	P	H	
		5942.6	50.41	-17.79	68.2	38.04	35	12.57	35.2	386	326	P	H	
														H
														H
	*	5825	114.48	-	-	102.29	34.87	12.5	35.18	100	50	P	V	
	*	5825	106.48	-	-	94.29	34.87	12.5	35.18	100	50	A	V	
		5851.6	60.23	-58.32	118.55	48	34.9	12.51	35.18	100	50	P	V	
		5856.2	58.2	-52.26	110.46	45.96	34.9	12.52	35.18	100	50	P	V	
		5883	50.92	-48.34	99.26	38.68	34.9	12.53	35.19	100	50	P	V	
		5935.8	48.1	-20.1	68.2	35.76	34.97	12.57	35.2	100	50	P	V	
														V
														V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.													



Band 4 5725~5850MHz
WIFI 802.11ac VHT20 (Harmonic @ 3m)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)	
802.11ac VHT20 CH 149 5745MHz		11490	47.26	-26.74	74	47.34	38.18	19.26	57.52	100	0	P	H	
		17235	49.94	-18.26	68.2	39.92	41.43	24.9	56.31	100	0	P	H	
													H	
													H	
			11490	46.3	-27.7	74	46.38	38.18	19.26	57.52	100	0	P	V
			17235	49.84	-18.36	68.2	39.82	41.43	24.9	56.31	100	0	P	V
														V
802.11ac VHT20 CH 157 5785MHz		11570	45.5	-28.5	74	45.18	38.33	19.33	57.34	100	0	P	H	
		17355	50.23	-17.97	68.2	40.02	41.55	25.01	56.35	100	0	P	H	
													H	
													H	
			11570	45.94	-28.06	74	45.62	38.33	19.33	57.34	100	0	P	V
			17355	49.76	-18.44	68.2	39.55	41.55	25.01	56.35	100	0	P	V
														V
802.11ac VHT20 CH 165 5825MHz		11650	46.46	-27.54	74	45.72	38.48	19.41	57.15	100	0	P	H	
		17475	49.95	-18.25	68.2	39.56	41.67	25.1	56.38	100	0	P	H	
													H	
													H	
			11650	45.46	-28.54	74	44.72	38.48	19.41	57.15	100	0	P	V
			17475	49.65	-18.55	68.2	39.26	41.67	25.1	56.38	100	0	P	V
														V
Remark	1. No other spurious found.													
	2. All results are PASS against Peak and Average limit line.													



Band 4 5725~5850MHz
WIFI 802.11ac VHT40 (Band Edge @ 3m)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)	
802.11ac VHT40 CH 151 5755MHz		5610.6	50.19	-18.01	68.2	38.24	34.8	12.29	35.14	400	338	P	H	
		5698.2	59.61	-44.26	103.87	47.69	34.7	12.38	35.16	400	338	P	H	
		5717.4	74.71	-35.36	110.07	62.77	34.7	12.4	35.16	400	338	P	H	
		5723.4	77.51	-41.04	118.55	65.57	34.7	12.4	35.16	400	338	P	H	
	*	5755	112.9	-	-	100.91	34.73	12.43	35.17	400	338	P	H	
	*	5755	105.5	-	-	93.51	34.73	12.43	35.17	400	338	A	H	
		5851.6	50.49	-68.06	118.55	38.26	34.9	12.51	35.18	400	338	P	H	
		5871.8	51.08	-55.01	106.09	38.84	34.9	12.53	35.19	400	338	P	H	
		5880.8	50.04	-50.85	100.89	37.8	34.9	12.53	35.19	400	338	P	H	
		5929.6	49.69	-18.51	68.2	37.36	34.97	12.56	35.2	400	338	P	H	
														H
														H
			5648.2	49.09	-19.11	68.2	37.31	34.6	12.33	35.15	100	48	P	V
			5699	61.38	-43.08	104.46	49.46	34.7	12.38	35.16	100	48	P	V
			5717.4	74	-36.07	110.07	62.06	34.7	12.4	35.16	100	48	P	V
			5725	78.92	-43.28	122.2	66.98	34.7	12.4	35.16	100	48	P	V
	*		5755	111.28	-	-	99.29	34.73	12.43	35.17	100	48	P	V
	*		5755	103.5	-	-	91.51	34.73	12.43	35.17	100	48	A	V
			5854.4	51.02	-61.15	112.17	38.78	34.9	12.52	35.18	100	48	P	V
			5861	49.9	-59.22	109.12	37.67	34.9	12.52	35.19	100	48	P	V
		5879.8	50.59	-51.04	101.63	38.35	34.9	12.53	35.19	100	48	P	V	
		5927	49.72	-18.48	68.2	37.39	34.97	12.56	35.2	100	48	P	V	
													V	
													V	



WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)	
802.11ac VHT40 CH 159 5795MHz		5649	48.18	-20.02	68.2	36.4	34.6	12.33	35.15	373	337	P	H	
		5682.4	49.55	-42.66	92.21	37.75	34.6	12.36	35.16	373	337	P	H	
		5714	53.74	-55.38	109.12	41.81	34.7	12.39	35.16	373	337	P	H	
		5723.8	52.92	-66.54	119.46	40.98	34.7	12.4	35.16	373	337	P	H	
	*	5795	113.13	-	-	101.03	34.8	12.47	35.17	373	337	P	H	
	*	5795	105.54	-	-	93.44	34.8	12.47	35.17	373	337	A	H	
		5854.2	60.89	-51.73	112.62	48.65	34.9	12.52	35.18	373	337	P	H	
		5855	57.81	-52.99	110.8	45.57	34.9	12.52	35.18	373	337	P	H	
		5876.8	51.44	-52.42	103.86	39.2	34.9	12.53	35.19	373	337	P	H	
		5928.4	49.58	-18.62	68.2	37.25	34.97	12.56	35.2	373	337	P	H	
														H
														H
			5624.2	48.51	-19.69	68.2	36.65	34.7	12.3	35.14	100	51	P	V
			5676.8	49.25	-38.82	88.07	37.44	34.6	12.36	35.15	100	51	P	V
			5713	56.39	-52.45	108.84	44.46	34.7	12.39	35.16	100	51	P	V
			5721.2	53.18	-60.36	113.54	41.24	34.7	12.4	35.16	100	51	P	V
	*		5795	110.94	-	-	98.84	34.8	12.47	35.17	100	51	P	V
	*		5795	102.98	-	-	90.88	34.8	12.47	35.17	100	51	A	V
			5850.8	60.05	-60.33	120.38	47.82	34.9	12.51	35.18	100	51	P	V
			5855.4	58.04	-52.65	110.69	45.8	34.9	12.52	35.18	100	51	P	V
		5877.4	52.86	-50.56	103.42	40.62	34.9	12.53	35.19	100	51	P	V	
		5932.2	50.21	-17.99	68.2	37.87	34.97	12.57	35.2	100	51	P	V	
													V	
													V	
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.													



**Band 4 5725~5850MHz
WIFI 802.11ac VHT40 (Harmonic @ 3m)**

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)	
802.11ac VHT40 CH 151 5755MHz		11510	46.06	-27.94	74	46.05	38.2	19.29	57.48	100	0	P	H	
		17265	50.81	-17.39	68.2	40.73	41.47	24.93	56.32	100	0	P	H	
													H	
													H	
			11510	46.8	-27.2	74	46.79	38.2	19.29	57.48	100	0	P	V
			17265	50.79	-17.41	68.2	40.71	41.47	24.93	56.32	100	0	P	V
														V
802.11ac VHT40 CH 159 5795MHz		11590	46.43	-27.57	74	46	38.37	19.35	57.29	100	0	P	H	
		17385	52	-16.2	68.2	41.75	41.58	25.03	56.36	100	0	P	H	
													H	
													H	
			11590	46.21	-27.79	74	45.78	38.37	19.35	57.29	100	0	P	V
			17385	51.58	-16.62	68.2	41.33	41.58	25.03	56.36	100	0	P	V
														V
Remark	1. No other spurious found.													
	2. All results are PASS against Peak and Average limit line.													



Band 4 5725~5850MHz
WIFI 802.11ac VHT80 (Band Edge @ 3m)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)	
802.11ac VHT80 CH 155 5775MHz		5648	53.73	-14.47	68.2	41.95	34.6	12.33	35.15	396	330	P	H	
		5700	66.66	-38.54	105.2	54.74	34.7	12.38	35.16	396	330	P	H	
		5716	69.81	-39.87	109.68	57.87	34.7	12.4	35.16	396	330	P	H	
		5720.6	70.7	-41.47	112.17	58.76	34.7	12.4	35.16	396	330	P	H	
	*	5775	110.15	-	-	98.1	34.77	12.45	35.17	396	330	P	H	
	*	5775	102.25	-	-	90.2	34.77	12.45	35.17	396	330	A	H	
		5852.2	70.91	-46.27	117.18	58.68	34.9	12.51	35.18	396	330	P	H	
		5855.2	70.7	-40.04	110.74	58.46	34.9	12.52	35.18	396	330	P	H	
		5875.2	64.5	-40.55	105.05	52.26	34.9	12.53	35.19	396	330	P	H	
		5934.4	50.41	-17.79	68.2	38.07	34.97	12.57	35.2	396	330	P	H	
														H
														H
			5648.4	55.2	-13	68.2	43.42	34.6	12.33	35.15	100	51	P	V
			5692.8	66.25	-33.64	99.89	54.34	34.7	12.37	35.16	100	51	P	V
			5718.6	70.45	-39.96	110.41	58.51	34.7	12.4	35.16	100	51	P	V
			5724	70.63	-49.29	119.92	58.69	34.7	12.4	35.16	100	51	P	V
	*		5775	108.51	-	-	96.46	34.77	12.45	35.17	100	51	P	V
	*		5775	100.45	-	-	88.4	34.77	12.45	35.17	100	51	A	V
			5852.2	70.51	-46.67	117.18	58.28	34.9	12.51	35.18	100	51	P	V
			5855.2	67.06	-43.68	110.74	54.82	34.9	12.52	35.18	100	51	P	V
		5875.6	61.47	-43.28	104.75	49.23	34.9	12.53	35.19	100	51	P	V	
		5930.4	49.02	-19.18	68.2	36.69	34.97	12.56	35.2	100	51	P	V	
													V	
													V	
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.													



**Band 4 5725~5850MHz
WIFI 802.11ac VHT80 (Harmonic @ 3m)**

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)	
802.11ac VHT80 CH 155 5775MHz		11550	47.03	-26.97	74	46.79	38.3	19.32	57.38	100	0	P	H	
		17325	51.38	-16.82	68.2	41.22	41.52	24.98	56.34	100	0	P	H	
													H	
													H	
			11550	46.39	-27.61	74	46.15	38.3	19.32	57.38	100	0	P	V
			17325	51.71	-16.49	68.2	41.55	41.52	24.98	56.34	100	0	P	V
														V
														V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.													



**Emission above 18GHz
5GHz WIFI 802.11ac VHT80 (SHF)**

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
5GHz 802.11ac VHT80 SHF		38966	48.34	-25.66	74	52.74	44.43	11.71	60.54	100	0	P	H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
			39164	47.55	-26.45	74	51.55	44.4	11.78	60.18	100	0	P
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Emission below 1GHz
5GHz WIFI 802.11ac VHT80 (LF)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)	
5GHz 802.11ac VHT80 LF		134.49	27.06	-16.44	43.5	37.36	17.55	2.11	29.96	-	-	P	H	
		158.52	29.61	-13.89	43.5	40.56	16.7	2.3	29.95	-	-	P	H	
		211.17	26.06	-17.44	43.5	38.39	15.01	2.59	29.93	-	-	P	H	
		365.1	29.54	-16.46	46	35.4	20.75	3.28	29.89	-	-	P	H	
		533.1	29.25	-16.75	46	31.29	24.01	3.81	29.86	-	-	P	H	
		941.9	32.86	-13.14	46	26.62	29.77	5.22	28.75	100	0	P	H	
														H
														H
														H
														H
														H
														H
			30	33.48	-6.52	40	38.23	24.32	0.94	30.01	100	0	P	V
			65.91	29.21	-10.79	40	45.62	12	1.57	29.98	-	-	P	V
			248.16	32.56	-13.44	46	41.84	17.96	2.68	29.92	-	-	P	V
			829.2	30.62	-15.38	46	27.23	27.94	4.77	29.32	-	-	P	V
			885.9	32.28	-13.72	46	27.52	28.8	5.01	29.05	-	-	P	V
			955.9	33.65	-12.35	46	26.56	30.5	5.26	28.67	-	-	P	V
													V	
													V	
													V	
													V	
													V	
													V	
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.													



Note symbol

*	Fundamental Frequency which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is over limit line.
P/A	Peak or Average
H/V	Horizontal or Vertical



A calculation example for radiated spurious emission is shown as below:

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1+2		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11b		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
CH 01													
2412MHz		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

1. Path Loss(dB) = Cable loss(dB) + Filter loss(dB) + Attenuator loss(dB)
2. Level(dBμV/m) = Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
3. Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

For Peak Limit @ 2390MHz:

1. Level(dBμV/m)
= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)
= 55.45 (dBμV/m)
2. Over Limit(dB)
= Level(dBμV/m) – Limit Line(dBμV/m)
= 55.45(dBμV/m) – 74(dBμV/m)
= -18.55(dB)

For Average Limit @ 2390MHz:

1. Level(dBμV/m)
= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)
= 43.54 (dBμV/m)
2. Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)
= 43.54(dBμV/m) – 54(dBμV/m)
= -10.46(dB)

Both peak and average measured complies with the limit line, so test result is “PASS”.



Appendix D. Radiated Spurious Emission Plots

Test Engineer :	Jesse Wang, Stan Hsieh, Ken Wu and James Chiu	Temperature :	22.7~24.6°C
		Relative Humidity :	51.6~57.5%

Band 4 - 5725~5850MHz
WIFI 802.11a (Band Edge @ 3m)

WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11a CH149 5745MHz	
1+2	Horizontal	Fundamental
Peak	<p>Date: 2021-04-05 PEAK_BE(B4)_16.24</p> <p>Site : 03CH07-HY Condition : PEAK_BE(B4)_16-24 3m HF_ANT_0007962 HORIZONTAL : RBW:3000.000kHz VIEW:3000.000kHz SWTC:Auto Detector : Peak Project : 130215 Mode : 36</p>	<p>Date: 2021-04-05 PEAK(UWB) AVG_54</p> <p>Site : 03CH07-HY Condition : PEAK(UWB) 3m HF_ANT_0007962 HORIZONTAL : RBW:1200.000kHz VIEW:3000.000kHz SWTC:Auto Detector : Peak Project : 130215 Mode : 36</p>



WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11a CH149 5745MHz	
1+2	Vertical	Fundamental
Peak	<p>Site : 03C407-01 Condition : PEAK_BE(B4)_16-24 3m HF_ANT_00075962 VERTICAL Detector : Peak Project : 130215 Mode : 36</p>	<p>Site : 03C407-01 Condition : PEAK(LIN) 3m HF_ANT_00075962 VERTICAL Detector : Peak Project : 130215 Mode : 36</p>





WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11a CH157 5785MHz	
1+2	Horizontal	Fundamental
<p>Peak</p>	<p>Date: 2021-04-05 PEAK_BE(B4)_16-24</p> <p>Site : 03CH07-HY Condition : PEAK_BE(B4)_16-24 3m HF_ANT_00075962 HORIZONTAL Detector : Peak Project : 130215 Mode : 37</p>	<p>Date: 2021-04-05 PEAK(LIN)1</p> <p>Site : 03CH07-HY Condition : PEAK(LIN)1 3m HF_ANT_00075962 HORIZONTAL Detector : Peak Project : 130215 Mode : 37</p>
<p>Peak</p>	<p>Date: 2021-04-05 PEAK_BE(B4)_16-24</p> <p>Site : 03CH07-HY Condition : PEAK_BE(B4)_16-24 3m HF_ANT_00075962 HORIZONTAL Detector : Peak Project : 130215 Mode : 37</p>	<p>Left blank</p>





WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11a CH157 5785MHz	
1+2	Vertical	Fundamental
<p>Peak</p>	<p>Date: 2021-04-05 PEAK_BE(B4)_16-24</p> <p>Site : 03CH07-HY Condition : PEAK_BE(B4)_16-24 3m HF_ANT_00075962 VERTICAL Detector : Peak Project : 130215 Mode : 37</p>	<p>Date: 2021-04-05 PEAK(FUN)</p> <p>Site : 03CH07-HY Condition : PEAK(FUN) 3m HF_ANT_00075962 VERTICAL Detector : Peak Project : 130215 Mode : 37</p>
<p>Peak</p>	<p>Date: 2021-04-05 PEAK_BE(B4)_16-24</p> <p>Site : 03CH07-HY Condition : PEAK_BE(B4)_16-24 3m HF_ANT_00075962 VERTICAL Detector : Peak Project : 130215 Mode : 37</p>	<p>Left blank</p>

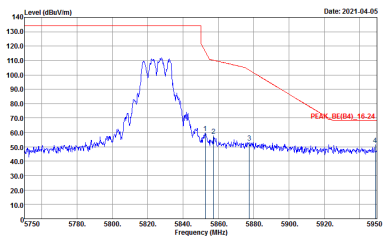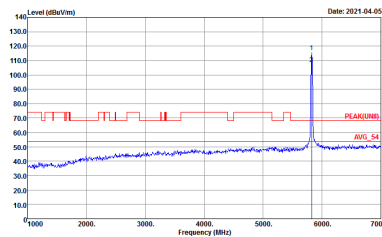

WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11a CH165 5825MHz	
1+2	Horizontal	Fundamental
Peak	 <p>Site : 03C1407-01 Condition : PEAK_BE(B4)_16-24 3m HF_ANT_00075962 HORIZONTAL Detector : Peak Project : 130215 Mode : 38</p>	 <p>Site : 03C1407-01 Condition : PEAK(LIN) 3m HF_ANT_00075962 HORIZONTAL Detector : Peak Project : 130215 Mode : 38</p>

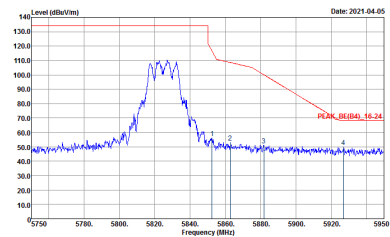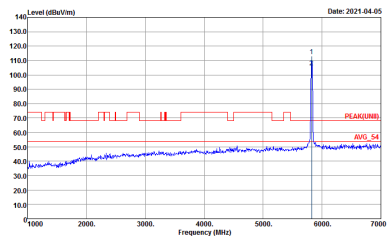

WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11a CH165 5825MHz	
1+2	Vertical	Fundamental
Peak	 <p>Site : 03C407-01 Condition : PEAK_BE(B4)_16-24 3m HF_ANT_00075962 VERTICAL Detector : Peak Project : 130215 Mode : 38</p>	 <p>Site : 03C407-01 Condition : PEAK(LIN) 3m HF_ANT_00075962 VERTICAL Detector : Peak Project : 130215 Mode : 38</p>



Band 4 5725~5850MHz
WIFI 802.11ac VHT20 (Band Edge @ 3m)

WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11ac VHT20 CH149 5745MHz	
1+2	Horizontal	Fundamental
Peak	<p> Date: 2021.04.05 PEAK_BE(B4)_E-23 </p> <p> Site : 03C407-01 Condition : PEAK_BE(B4)_16-24 3m HF_ANT_00075962 HORIZONTAL Detector : Peak Project : 130215 Mode : 39 </p>	<p> Date: 2021.04.05 PEAK(FUN) </p> <p> Site : 03C407-01 Condition : PEAK(FUN) 3m HF_ANT_00075962 HORIZONTAL Detector : Peak Project : 130215 Mode : 39 </p>



WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11ac VHT20 CH149 5745MHz	
1+2	Vertical	Fundamental
Peak Avg.	<p>Site : 03C407-01 Condition : PEAK_BE(B4)_1E-24 3m HF_ANT_00075962 VERTICAL Detector : Peak Project : 130215 Mode : 39</p>	<p>Site : 03C407-01 Condition : PEAK(LIN)1 3m HF_ANT_00075962 VERTICAL Detector : Peak Project : 130215 Mode : 39</p>



WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11ac VHT20 CH157 5785MHz	
1+2	Horizontal	Fundamental
<p>Peak</p>	<p>Date: 2021-04-05 PEAK_BE(B4)_16-24</p> <p>Site : 03CH07-HY Condition : PEAK_BE(B4)_16-24 3m HF_ANT_00075962 HORIZONTAL Detector : Peak Project : 130215 Mode : 40</p>	<p>Date: 2021-04-05 PEAK(LIN)1</p> <p>Site : 03CH07-HY Condition : PEAK(LIN)1 3m HF_ANT_00075962 HORIZONTAL Detector : Peak Project : 130215 Mode : 40</p>
<p>Peak</p>	<p>Date: 2021-04-05 PEAK_BE(B4)_16-24</p> <p>Site : 03CH07-HY Condition : PEAK_BE(B4)_16-24 3m HF_ANT_00075962 HORIZONTAL Detector : Peak Project : 130215 Mode : 40</p>	<p>Left blank</p>



WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11ac VHT20 CH157 5785MHz	
1+2	Vertical	Fundamental
<p>Peak</p>	<p>Date: 2021.04.05 PEAK_BE(B4)_16-24</p> <p>Site : 03CH07-HY Condition : PEAK_BE(B4)_16-24 3m HF_ANT_00075962 VERTICAL Detector : Peak Project : 130215 Mode : 40</p>	<p>Date: 2021.04.05 PEAK(LIN)1</p> <p>Site : 03CH07-HY Condition : PEAK(LIN)1 3m HF_ANT_00075962 VERTICAL Detector : Peak Project : 130215 Mode : 40</p>
<p>Peak</p>	<p>Date: 2021.04.05 PEAK_BE(B4)_16-24</p> <p>Site : 03CH07-HY Condition : PEAK_BE(B4)_16-24 3m HF_ANT_00075962 VERTICAL Detector : Peak Project : 130215 Mode : 40</p>	<p>Left blank</p>



WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11ac VHT20 CH165 5825MHz	
1+2	Horizontal	Fundamental
Peak	<p>Site : 03C1407-011 Condition : PEAK_BE(B4)_16-24 3m HF_ANT_00075962 HORIZONTAL Detector : Peak Project : 130215 Mode : 41</p>	<p>Site : 03C1407-011 Condition : PEAK(LIN) 3m HF_ANT_00075962 HORIZONTAL Detector : Peak Project : 130215 Mode : 41</p>






WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11ac VHT20 CH165 5825MHz	
1+2	Vertical	Fundamental
Peak Avg.	<p>Site : 03C407-01 Condition : :PEAK_BE(B4)_16-24 3m HF_ANT_00075962 VERTICAL Detector : :Peak Project : :130215 Mode : :41</p>	<p>Site : 03C407-01 Condition : :PEAK(LIN) 3m HF_ANT_00075962 VERTICAL Detector : :Peak Project : :130215 Mode : :41</p>






Band 4 5725~5850MHz
WIFI 802.11ac VHT40 (Band Edge @ 3m)

WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11ac VHT40 CH151 5755MHz	
1+2	Horizontal	Fundamental
Peak	<p>Site : 03CH07-HY Condition : PEAK_BE(B4)_16-24 3m HF_ANT_00075962 HORIZONTAL Detector : REW:1000.000kHz VBW:3000.000kHz SWT:Auto Project : Peak : 130215 Mode : 42</p>	<p>Site : 03CH07-HY Condition : PEAK(LIN) 3m HF_ANT_00075962 HORIZONTAL Detector : REW:1000.000kHz VBW:3000.000kHz SWT:Auto Project : Peak : 130215 Mode : 42</p>
Peak	<p>Site : 03CH07-HY Condition : PEAK_BE(B4)_16-24 3m HF_ANT_00075962 HORIZONTAL Detector : REW:1000.000kHz VBW:3000.000kHz SWT:Auto Project : Peak : 130215 Mode : 42</p>	Left blank

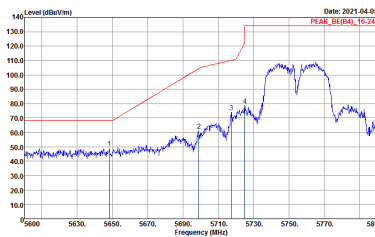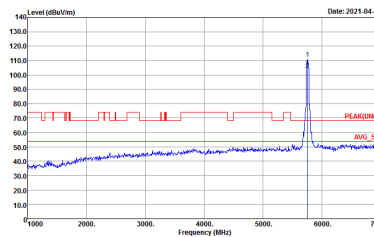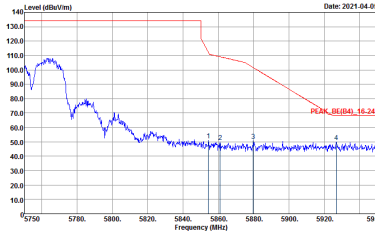

WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11ac VHT40 CH151 5755MHz	
1+2	Vertical	Fundamental
<p>Peak</p>	 <p>Date: 2021.04.05 PEAK_BE(B4)_16-24</p> <p>Site : 03CH07-HY Condition : PEAK_BE(B4)_16-24 3m HF_ANT_00075962 VERTICAL Detector : Peak Project : 130215 Mode : 42</p>	 <p>Date: 2021.04.05 PEAK(FUN)</p> <p>Site : 03CH07-HY Condition : PEAK(FUN) 3m HF_ANT_00075962 VERTICAL Detector : Peak Project : 130215 Mode : 42</p>
<p>Peak</p>	 <p>Date: 2021.04.05 PEAK_BE(B4)_16-24</p> <p>Site : 03CH07-HY Condition : PEAK_BE(B4)_16-24 3m HF_ANT_00075962 VERTICAL Detector : Peak Project : 130215 Mode : 42</p>	<p>Left blank</p>

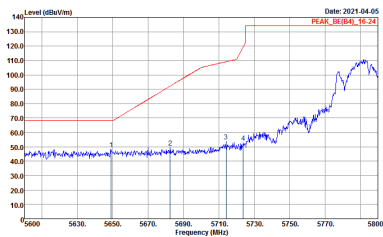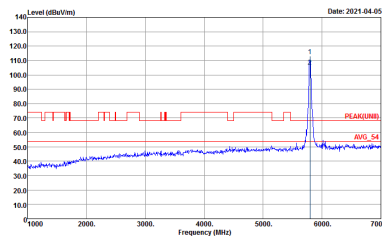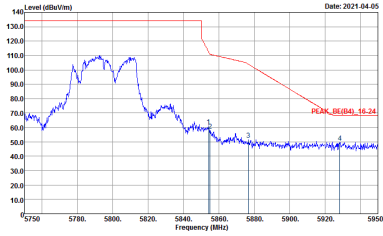

WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11ac VHT40 CH159 5795MHz	
1+2	Horizontal	Fundamental
<p>Peak</p>	 <p>Site : 03CH07-HY Condition : PEAK_BE(B4)_16-24 3m HF_ANT_00075962 HORIZONTAL Detector : Peak Project : 130215 Mode : 43</p>	 <p>Site : 03CH07-HY Condition : PEAK(LIN) 3m HF_ANT_00075962 HORIZONTAL Detector : Peak Project : 130215 Mode : 43</p>
<p>Peak</p>	 <p>Site : 03CH07-HY Condition : PEAK_BE(B4)_16-24 3m HF_ANT_00075962 HORIZONTAL Detector : Peak Project : 130215 Mode : 43</p>	<p>Left blank</p>





WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11ac VHT40 CH159 5795MHz	
1+2	Vertical	Fundamental
<p>Peak</p>	<p>Date: 2021.04.05 PEAK_BE(B4)_16-24</p> <p>Site : 03CH07-HY Condition : PEAK_BE(B4)_16-24 3m HF_ANT_00075962 VERTICAL Detector : Peak Project : 130215 Mode : 43</p>	<p>Date: 2021.04.05 PEAK(FUN)</p> <p>Site : 03CH07-HY Condition : PEAK(FUN) 3m HF_ANT_00075962 VERTICAL Detector : Peak Project : 130215 Mode : 43</p>
<p>Peak</p>	<p>Date: 2021.04.05 PEAK_BE(B4)_16-24</p> <p>Site : 03CH07-HY Condition : PEAK_BE(B4)_16-24 3m HF_ANT_00075962 VERTICAL Detector : Peak Project : 130215 Mode : 43</p>	<p>Left blank</p>



Band 4 5725~5850MHz
WIFI 802.11ac VHT80 (Band Edge @ 3m)

WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11ac VHT80 CH155 5775MHz	
1+2	Horizontal	Fundamental
Peak	<p>Site : 03CH07-HY Condition : PEAK_BE(B4)_16-24 3m HF_ANT_00075962 HORIZONTAL Detector : REW:1000.000kHz VBW:3000.000kHz SWT:Auto Peak : Peak Project : 130215 Mode : 44</p>	<p>Site : 03CH07-HY Condition : PEAK(LIN) 3m HF_ANT_00075962 HORIZONTAL Detector : REW:1000.000kHz VBW:3000.000kHz SWT:Auto Peak : Peak Project : 130215 Mode : 44</p>
Peak	<p>Site : 03CH07-HY Condition : PEAK_BE(B4)_16-24 3m HF_ANT_00075962 HORIZONTAL Detector : REW:1000.000kHz VBW:3000.000kHz SWT:Auto Peak : Peak Project : 130215 Mode : 44</p>	Left blank

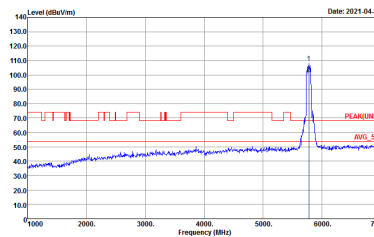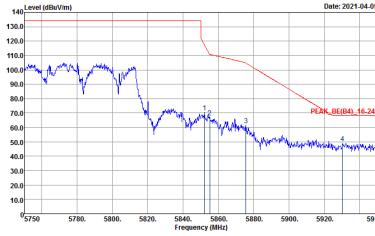

WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11ac VHT80 CH155 5775MHz	
1+2	Vertical	Fundamental
<p>Peak</p>	 <p>Date: 2021-04-05 PEAK_BE(B4)_16-24</p> <p>Site : 03CH07-HY Condition : PEAK_BE(B4)_16-24 3m HF_ANT_00075962 VERTICAL Detector : Peak Project : 130215 Mode : 44</p>	 <p>Date: 2021-04-05 PEAK(LIN) AVG_24</p> <p>Site : 03CH07-HY Condition : PEAK(LIN) 3m HF_ANT_00075962 VERTICAL Detector : Peak Project : 130215 Mode : 44</p>
<p>Peak</p>	 <p>Date: 2021-04-05 PEAK_BE(B4)_16-24</p> <p>Site : 03CH07-HY Condition : PEAK_BE(B4)_16-24 3m HF_ANT_00075962 VERTICAL Detector : Peak Project : 130215 Mode : 44</p>	<p>Left blank</p>





Band 4 - 5725~5850MHz
WIFI 802.11a (Harmonic @ 3m)

Table with 2 columns: WIFI (Band 4 5725~5850MHz Harmonic @ 3m), ANT (802.11a CH149 5745MHz). It contains two sub-tables for 'Horizontal' and 'Vertical' orientations, each with a spectral plot and associated metadata (Site, Condition, Detector, Project, Mode).

Peak
Avg.

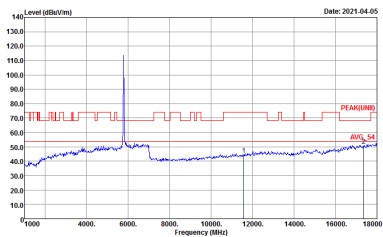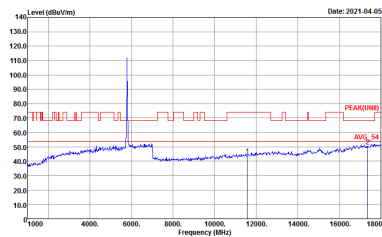

WIFI	Band 4 5725~5850MHz Harmonic @ 3m	
ANT	802.11a CH157 5785MHz	
1+2	Horizontal	Vertical
<p>Peak</p> <p>Avg.</p>	 <p>Site : 03C402-441 Condition : PEAK(UNII) 3m HF_ANT_00075962 HORIZONTAL Detector : Peak Project : 130215 Mode : 37</p>	 <p>Site : 03C402-441 Condition : PEAK(UNII) 3m HF_ANT_00075962 VERTICAL Detector : Peak Project : 130215 Mode : 37</p>



WIFI	Band 4 5725~5850MHz Harmonic @ 3m	
ANT	802.11a CH165 5825MHz	
1+2	Horizontal	Vertical
Peak Avg.	<p>Site : 03C402-441 Condition : PEAK(UNI) 3m HF_ANT_00075962 HORIZONTAL Detector : Peak Project : 130215 Mode : 38</p>	<p>Site : 03C402-441 Condition : PEAK(UNI) 3m HF_ANT_00075962 VERTICAL Detector : Peak Project : 130215 Mode : 38</p>



**Band 4 5725~5850MHz
WIFI 802.11ac VHT20 (Harmonic @ 3m)**

WIFI	Band 4 5725~5850MHz Harmonic @ 3m	
ANT	802.11ac VHT20 CH149 5745MHz	
1+2	Horizontal	Vertical
Peak Avg.	<p>Site : 03C407-01 Condition : PEAK(UNI) 3m HF_ANT_00075962 HORIZONTAL Detector : Peak Project : 130215 Mode : 39</p>	<p>Site : 03C407-01 Condition : PEAK(UNI) 3m HF_ANT_00075962 VERTICAL Detector : Peak Project : 130215 Mode : 39</p>



WIFI	Band 4 5725~5850MHz Harmonic @ 3m	
ANT	802.11ac VHT20 CH157 5785MHz	
1+2	Horizontal	Vertical
Peak Avg.	<p>Site : 03C402-491 Condition : PEAK(UNII) 3m HF_ANT_00075962 HORIZONTAL Detector : Peak Project : 130215 Mode : 40</p>	<p>Site : 03C402-491 Condition : PEAK(UNII) 3m HF_ANT_00075962 VERTICAL Detector : Peak Project : 130215 Mode : 40</p>



WIFI	Band 4 5725~5850MHz Harmonic @ 3m	
ANT	802.11ac VHT20 CH165 5825MHz	
1+2	Horizontal	Vertical
Peak Avg.	<p>Site : 03C402-441 Condition : PEAK(UNI) 3m HF_ANT_00075962 HORIZONTAL Detector : Peak Project : 130215 Mode : 41</p>	<p>Site : 03C402-441 Condition : PEAK(UNI) 3m HF_ANT_00075962 VERTICAL Detector : Peak Project : 130215 Mode : 41</p>



Band 4 5725~5850MHz
WIFI 802.11ac VHT40 (Harmonic @ 3m)

WIFI	Band 4 5725~5850MHz Harmonic @ 3m	
ANT	802.11ac VHT40 CH151 5755MHz	
1+2	Horizontal	Vertical
Peak Avg.	<p>Site : 03CH07-HY Condition : PEAK(LINII) 3m HF_ANT_00075962 HORIZONTAL Detector : Peak Project : 130215 Mode : 42</p>	<p>Site : 03CH07-HY Condition : PEAK(LINII) 3m HF_ANT_00075962 VERTICAL Detector : Peak Project : 130215 Mode : 42</p>



WIFI	Band 4 5725~5850MHz Harmonic @ 3m	
ANT	802.11ac VHT40 CH159 5795MHz	
1+2	Horizontal	Vertical
Peak Avg.	<p>Site : 03C402-441 Condition : PEAK(UNI) 3m HF_ANT_00075962 HORIZONTAL Detector : Peak Project : 130215 Mode : 43</p>	<p>Site : 03C402-441 Condition : PEAK(UNI) 3m HF_ANT_00075962 VERTICAL Detector : Peak Project : 130215 Mode : 43</p>



Band 4 5725~5850MHz
WIFI 802.11ac VHT80 (Harmonic @ 3m)

WIFI	Band 4 5725~5850MHz Harmonic @ 3m	
ANT	802.11ac VHT80 CH155 5775MHz	
1+2	Horizontal	Vertical
Peak Avg.	<p>Site : 03C407-01 Condition : PEAK(UNI) 3m HF_ANT_00075962 HORIZONTAL Detector : Peak Project : 130215 Mode : 43</p>	<p>Site : 03C407-01 Condition : PEAK(UNI) 3m HF_ANT_00075962 VERTICAL Detector : Peak Project : 130215 Mode : 43</p>



Emission above 18GHz
5GHz WIFI 802.11ac VHT80 (SHF)

Table with 2 columns: Horizontal and Vertical. Each column contains a spectral plot of Level (dBuV/m) vs Frequency (MHz) from 18000 to 40000 MHz. The plots show a peak at approximately 37000 MHz. Metadata includes: Site: 03C407-4H, Condition: PEAK(UNII) 1m SHF-EHF_9170251 HORIZONTAL, Detector: Peak, Project: 130215, Mode: 45.

QP / Peak



Emission below 1GHz
5GHz WIFI 802.11ac VHT80 (LF)

WIFI	5GHz WIFI	
ANT	802.11ac VHT80 LF	
1+2	Horizontal	Vertical
QP / Peak	<p>Site : 03C407-011 Condition : QP 3m LF-ANT-35419(6) HORIZONTAL Detector : Peak Project : 130215 Mode : 46</p>	<p>Site : 03C407-011 Condition : QP 3m LF-ANT-35419(6) VERTICAL Detector : Peak Project : 130215 Mode : 46</p>





Appendix E. Duty Cycle Plots

Antenna	Band	Duty Cycle(%)	T(us)	1/T(kHz)	VBW Setting	Duty Factor(dB)
1+2	802.11a for Ant 1	98.07	-	-	10Hz	0.08
1+2	802.11a for Ant 2	98.07	-	-	10Hz	0.08
1+2	5GHz 802.11ac VHT20 for Ant 1	97.94	1900	0.53	1kHz	0.09
1+2	5GHz 802.11ac VHT20 for Ant 2	97.94	1900	0.53	1kHz	0.09
1+2	5GHz 802.11ac VHT40 for Ant 1	95.88	930	1.08	3kHz	0.18
1+2	5GHz 802.11ac VHT40 for Ant 2	94.85	920	1.09	3kHz	0.23
1+2	5GHz 802.11ac VHT80 for Ant 1	94.07	1110	0.90	1kHz	0.27
1+2	5GHz 802.11ac VHT80 for Ant 2	94.02	1100	0.91	1kHz	0.27



MIMO <Ant. 1>

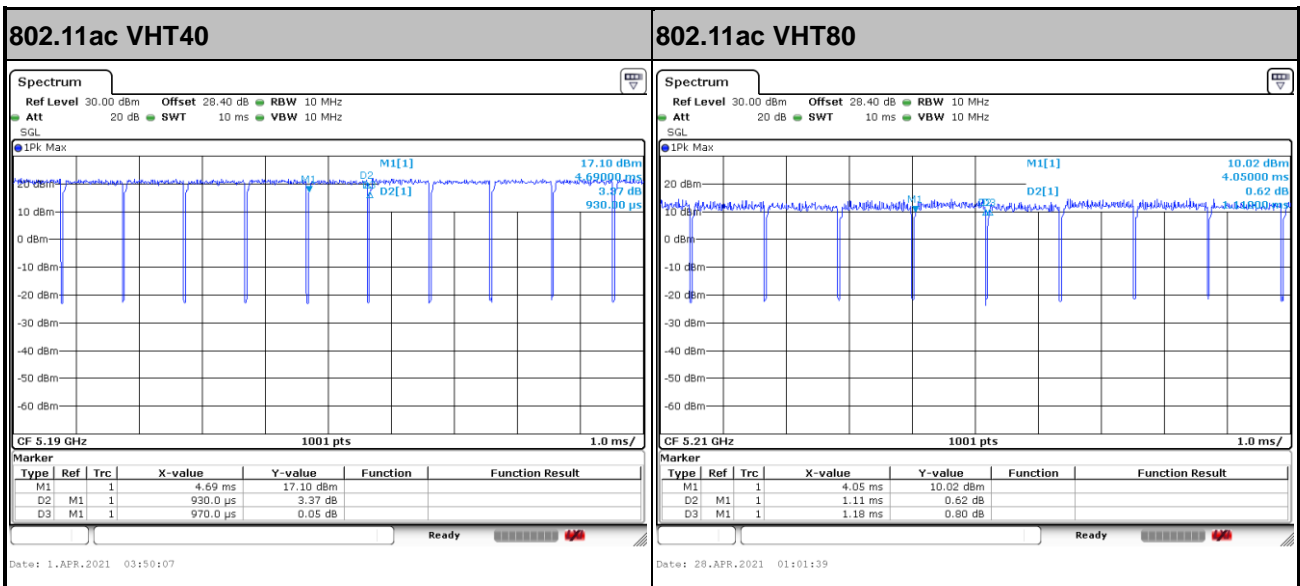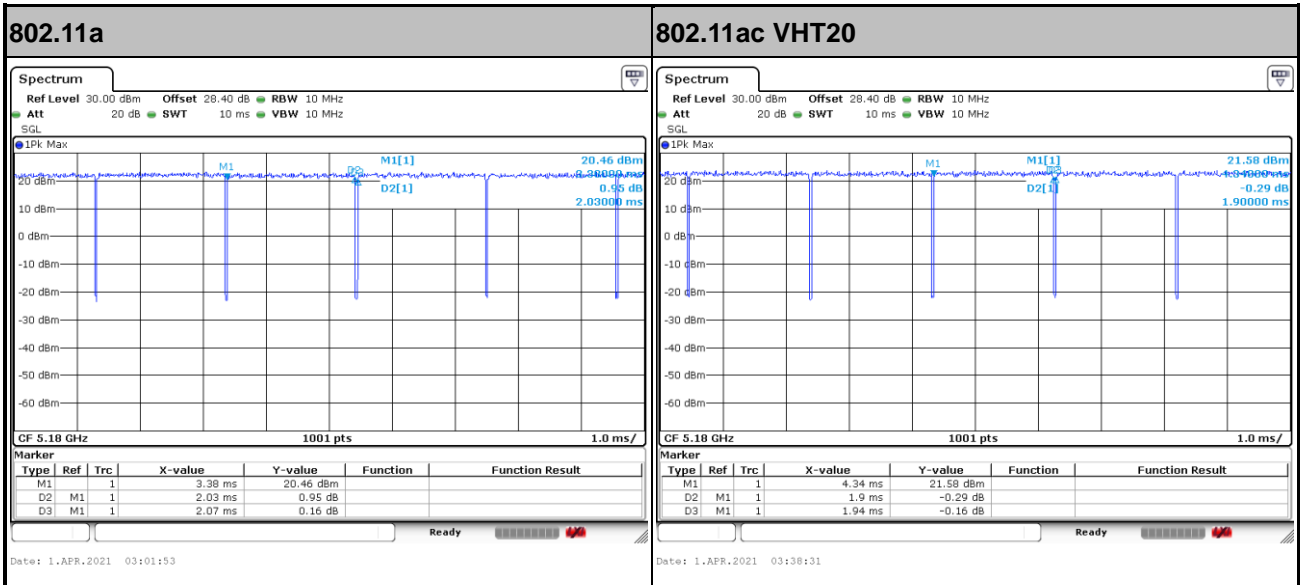



MIMO <Ant. 2>

