



802.11b


Ant1

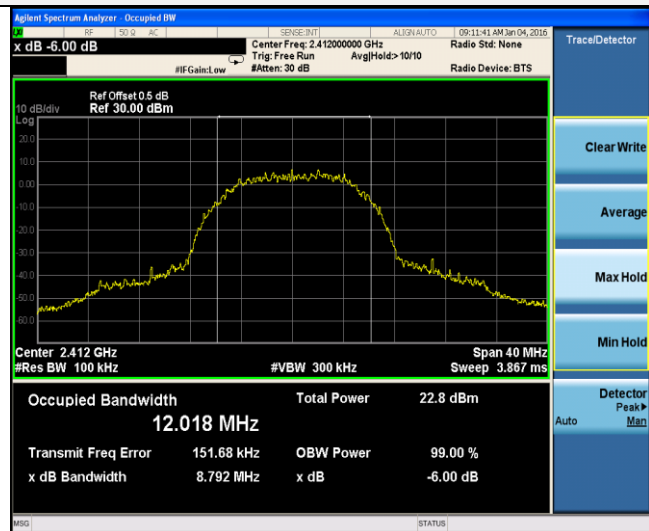


Ant2

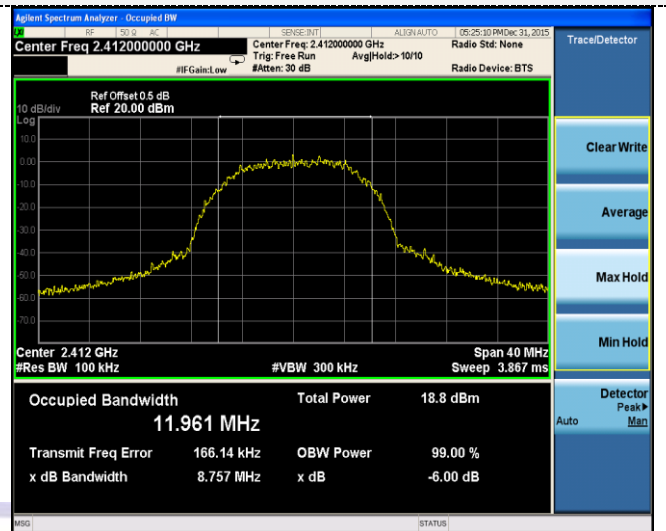


CH01

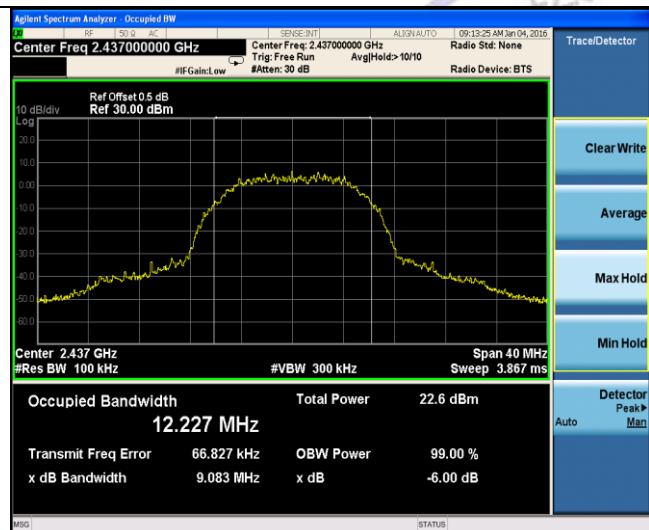


CH01

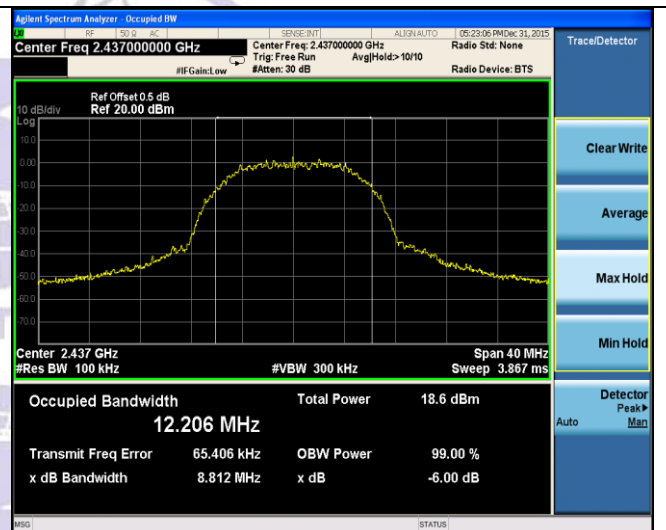

CH06

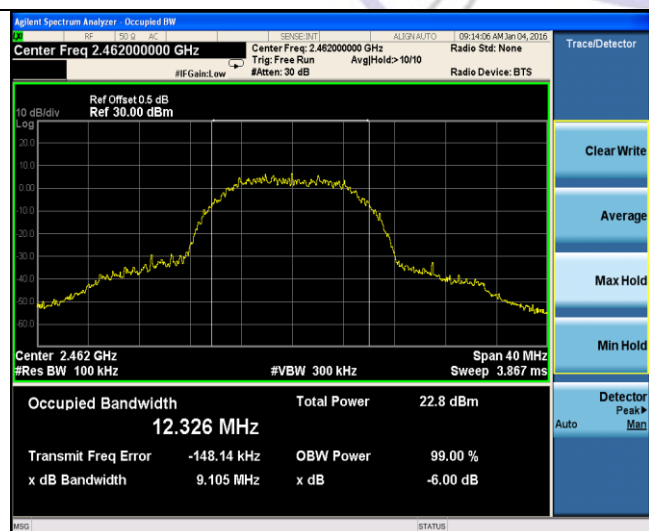

CH06

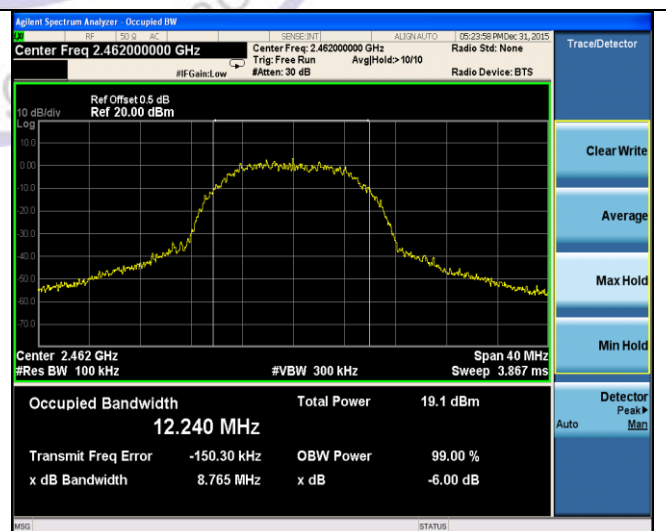

CH11




CH11




802.11g


Ant1

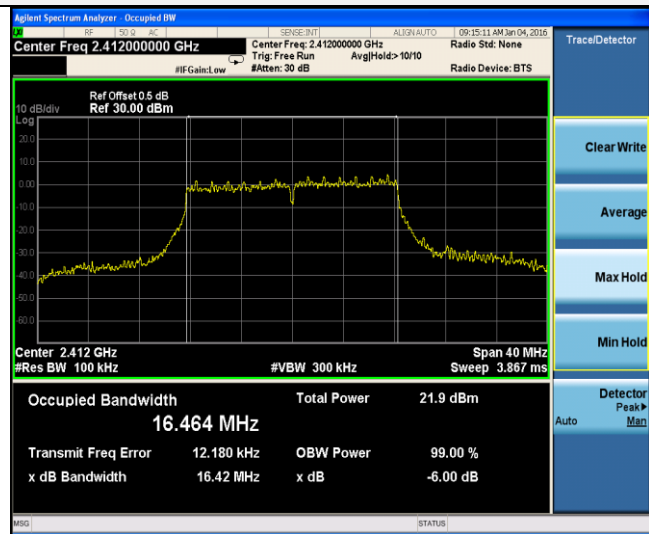


Ant2

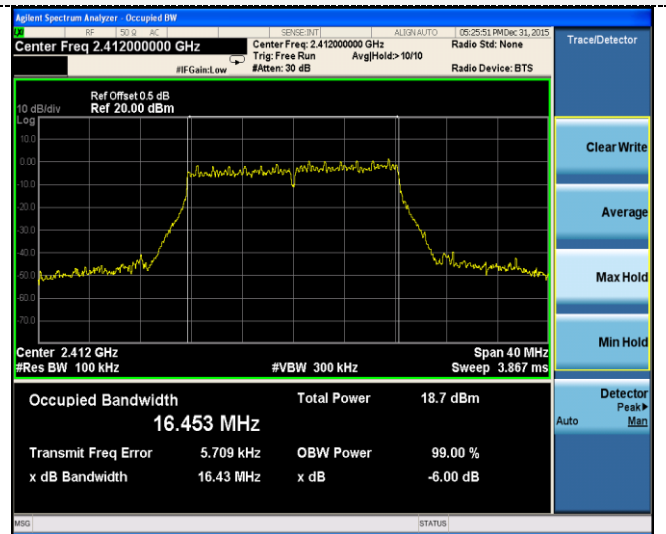


CH01

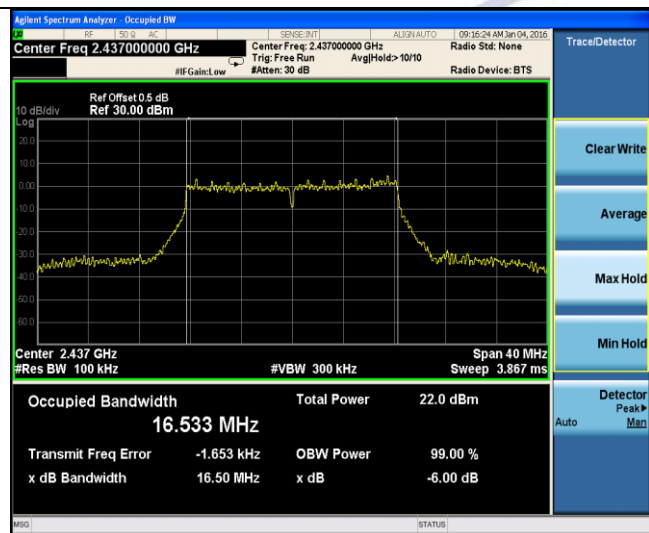


CH01

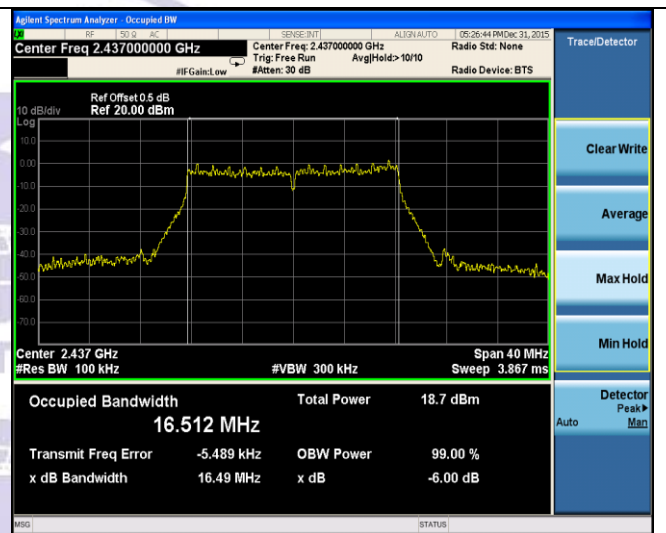


CH06

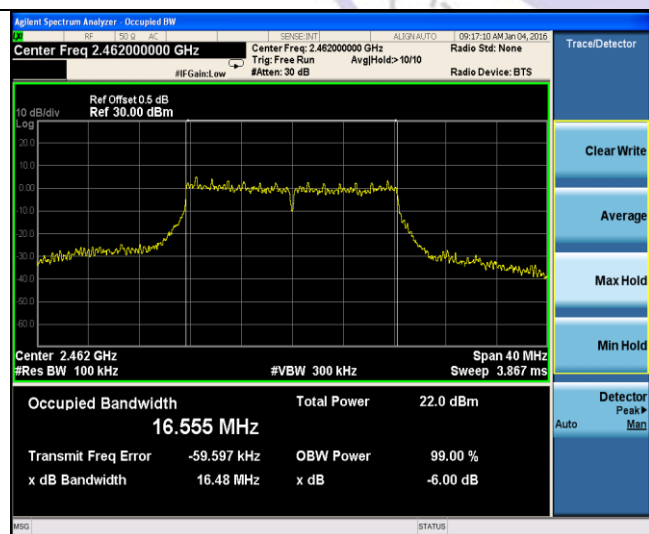


CH06

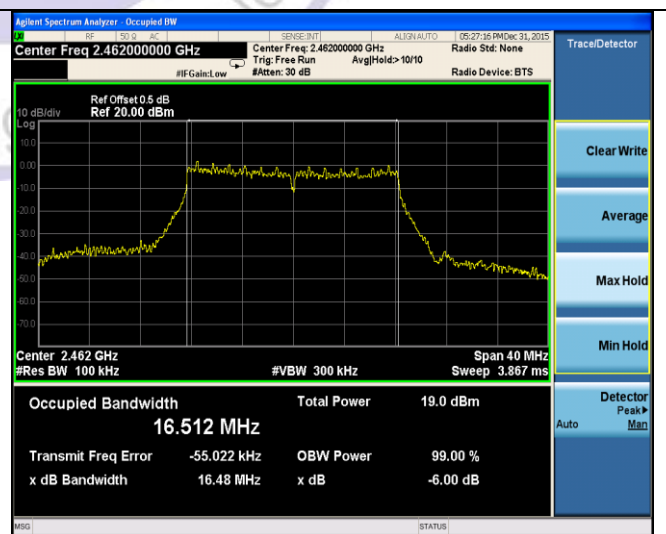

CH11




CH11




802.11n(HT20)


Ant1

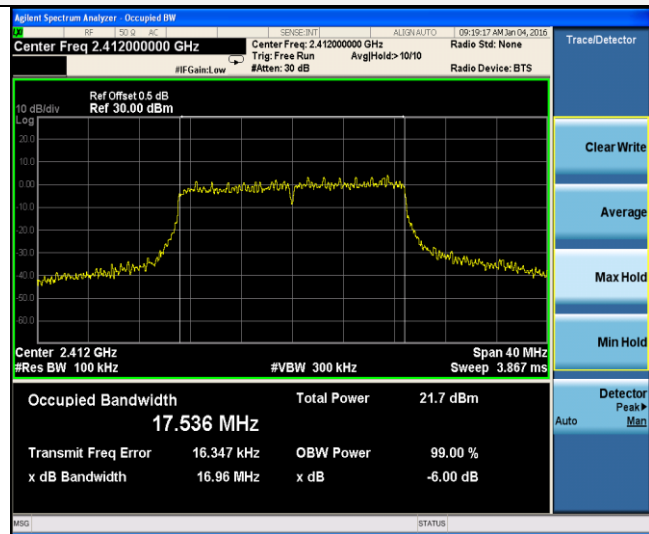


Ant2

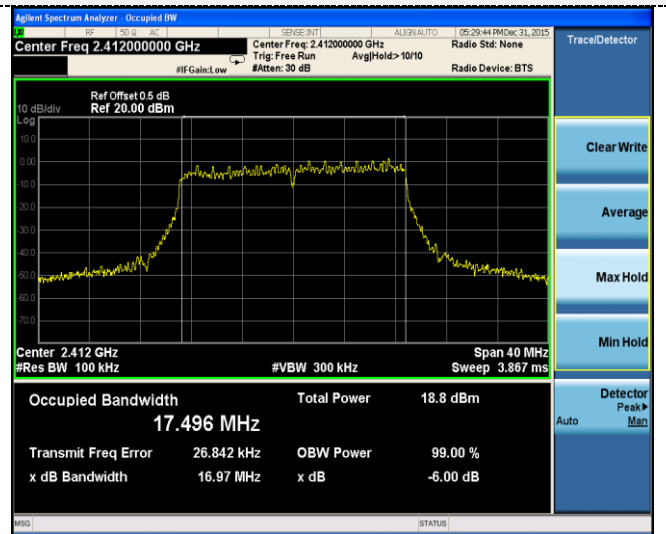


CH01

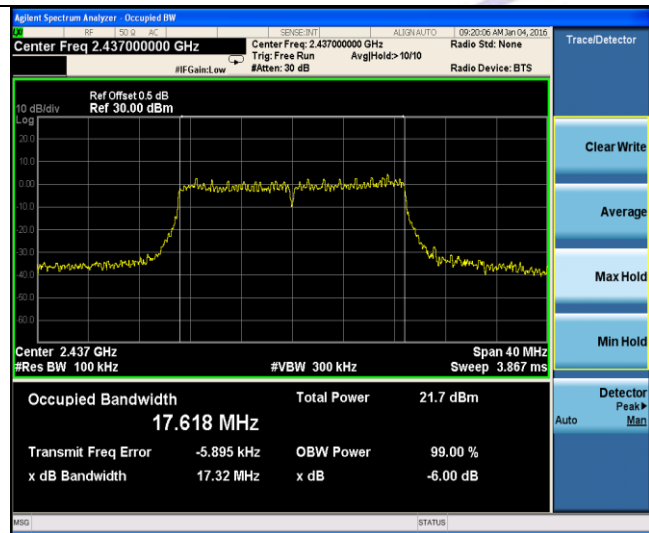


CH01

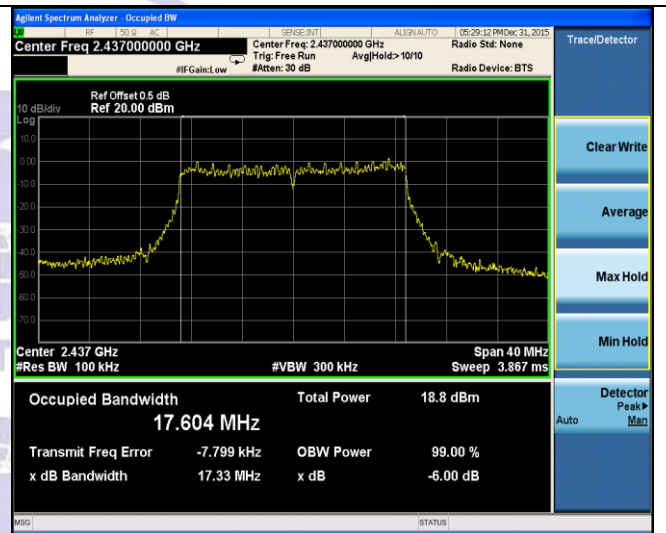


CH06

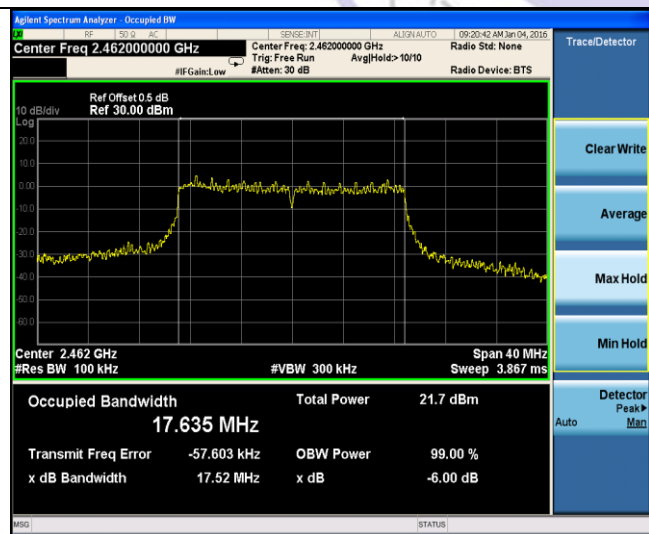


CH06

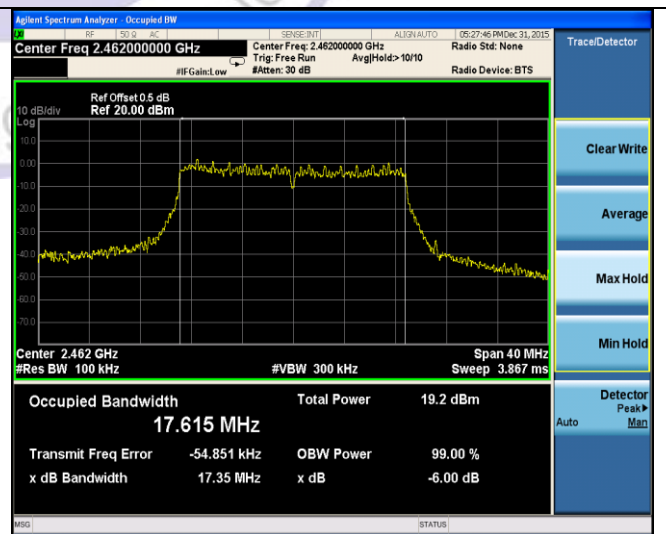

CH11





CH11



802.11n(HT40)



Ant1

Ant2

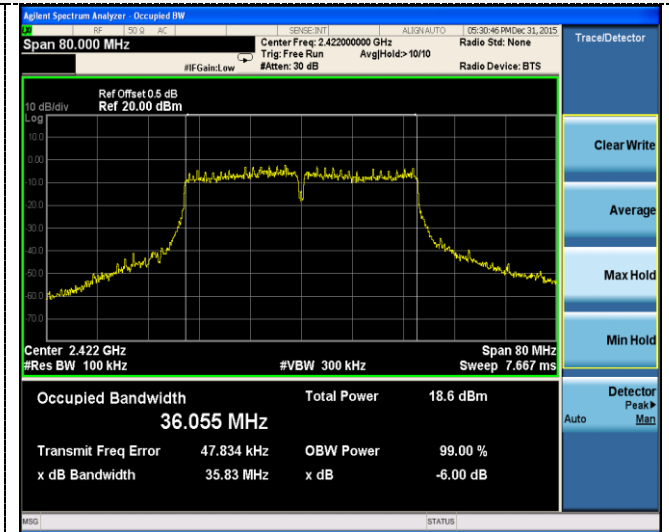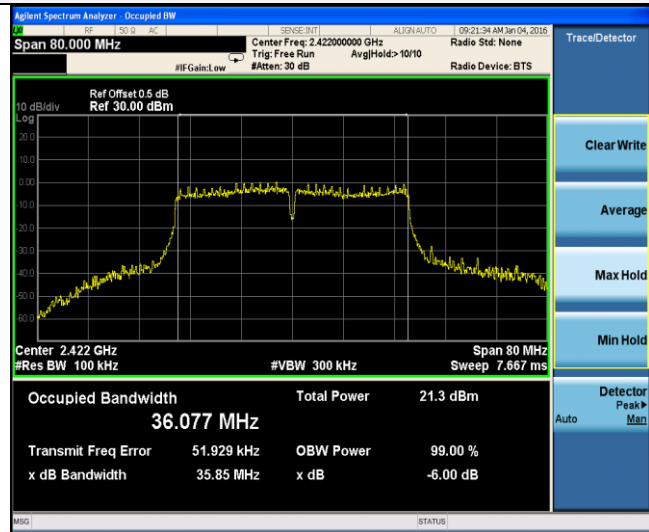



CH03

CH03

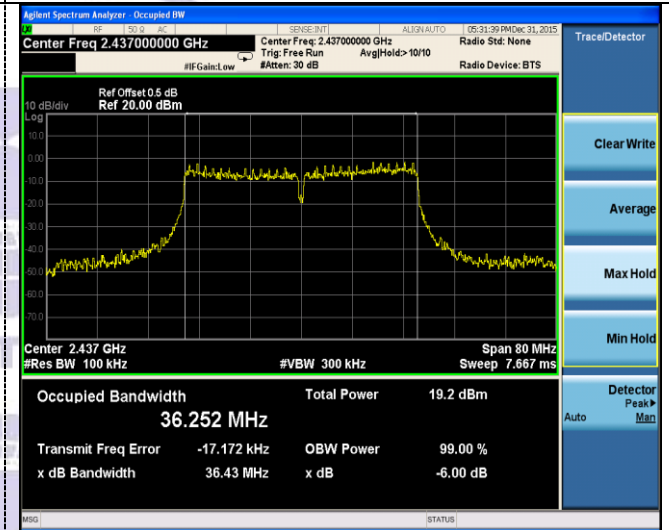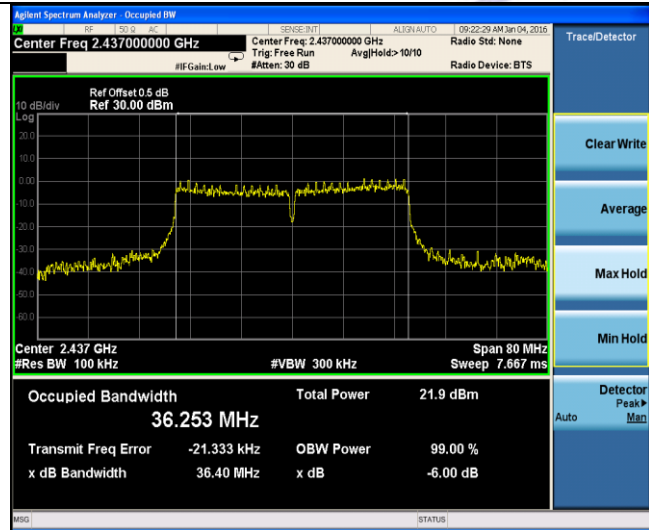

CH06

CH06

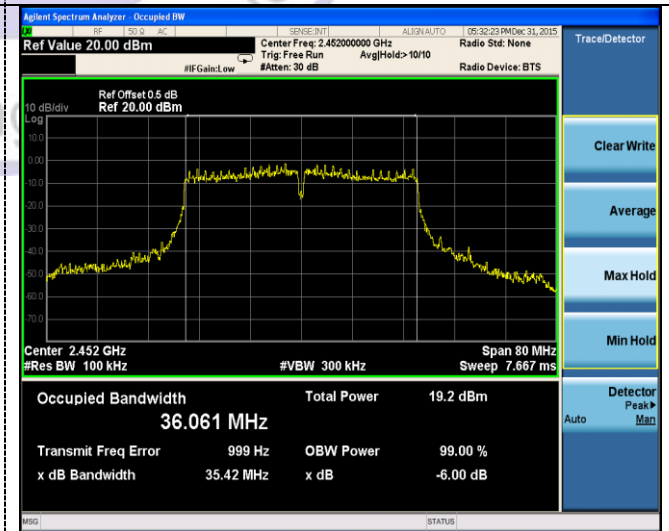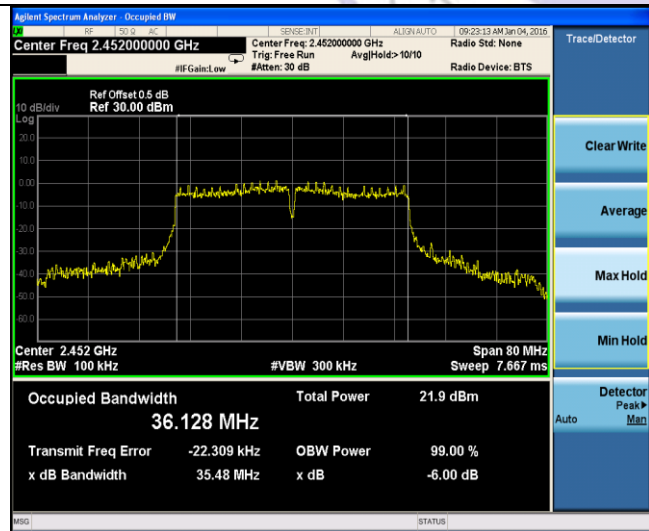

CH09

CH09

### 3.6. Out-of-band Emissions

#### Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required.

#### Test Procedure

Connect the transmitter output to spectrum analyzer using a low loss RF cable, and set the spectrum analyzer to RBW=100 kHz, VBW= 300 kHz, peak detector, and max hold. Measurements utilizing these settings are made of the in-band reference level, bandedge and out-of-band emissions.

#### Test Configuration





#### Test Results



Remark: The measurement frequency range is from 30MHz to the 10th harmonic of the fundamental frequency. The lowest, middle and highest channels are tested to verify the spurious emissions and bandedge measurement data.

Test plot as follows:



### Ant1 802.11b

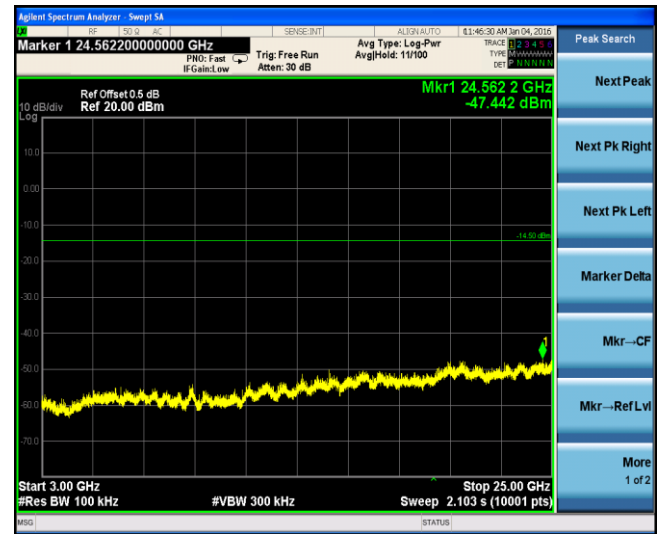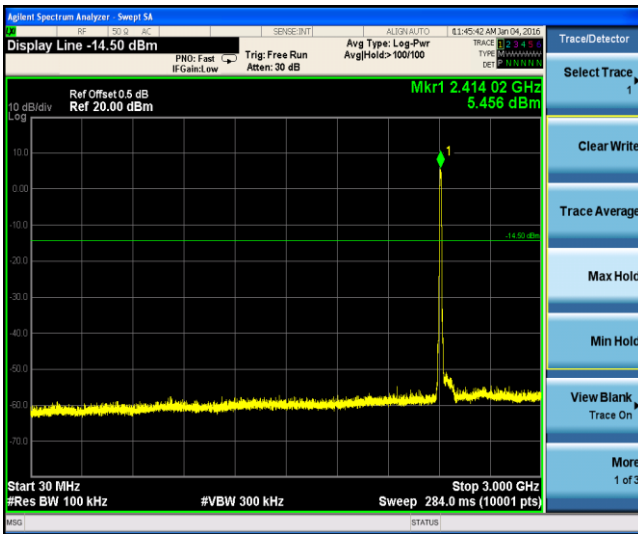


### CH01

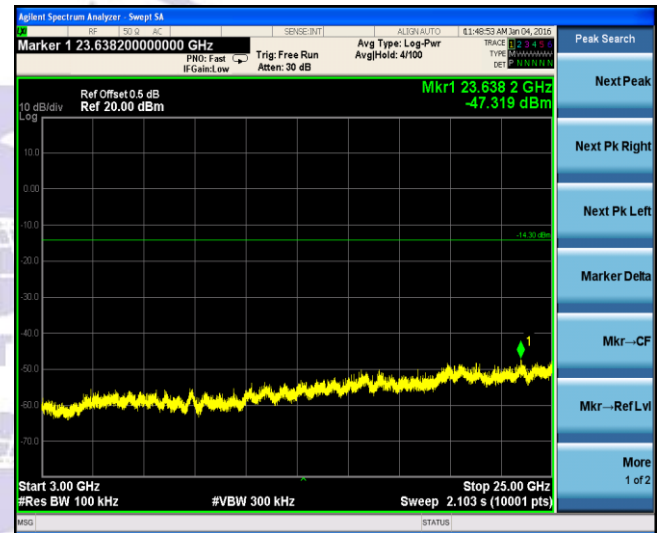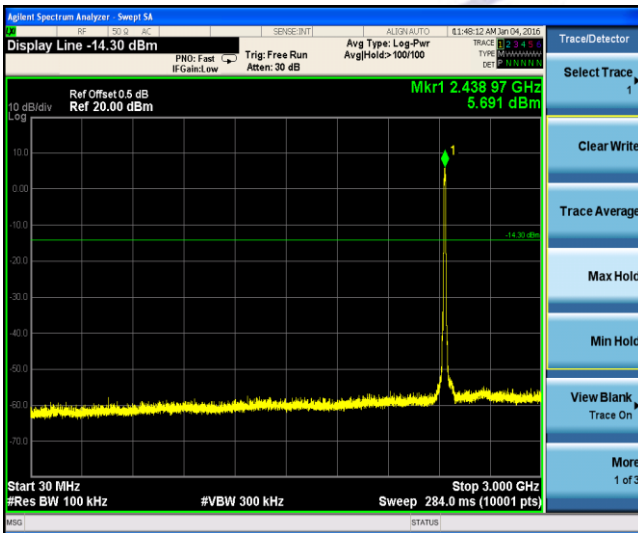


### CH06

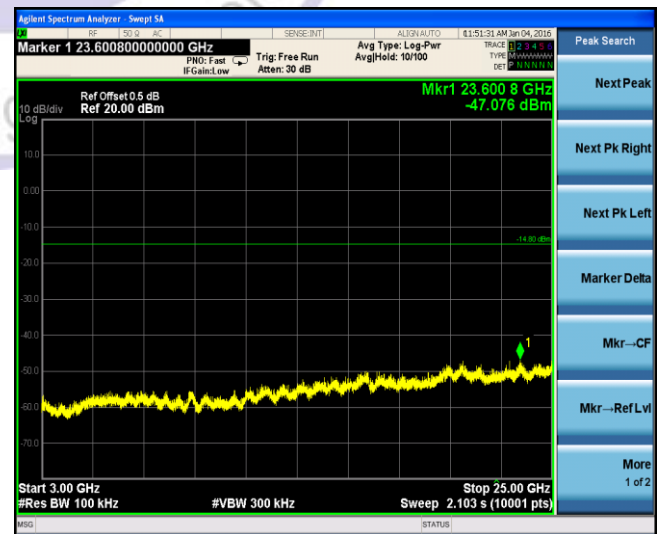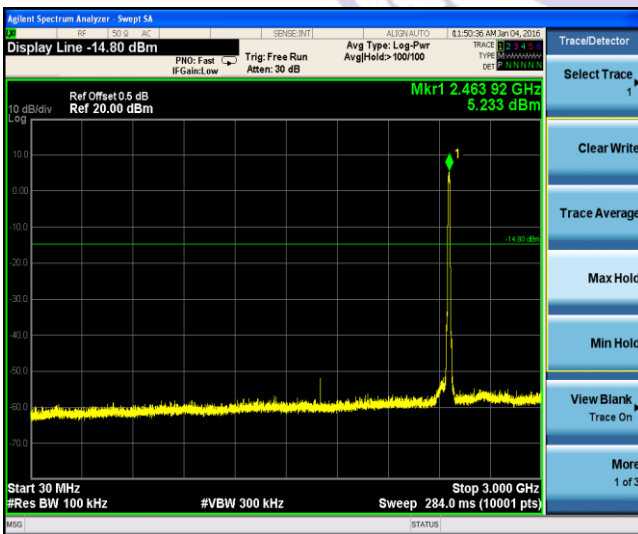

### CH11

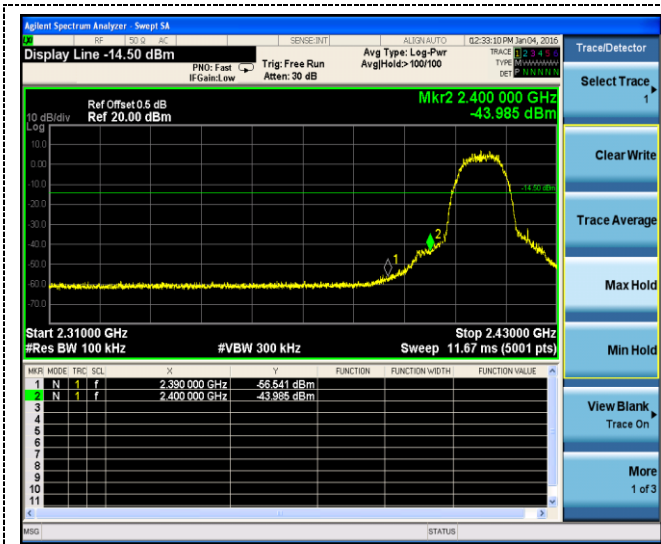


Left Band edge


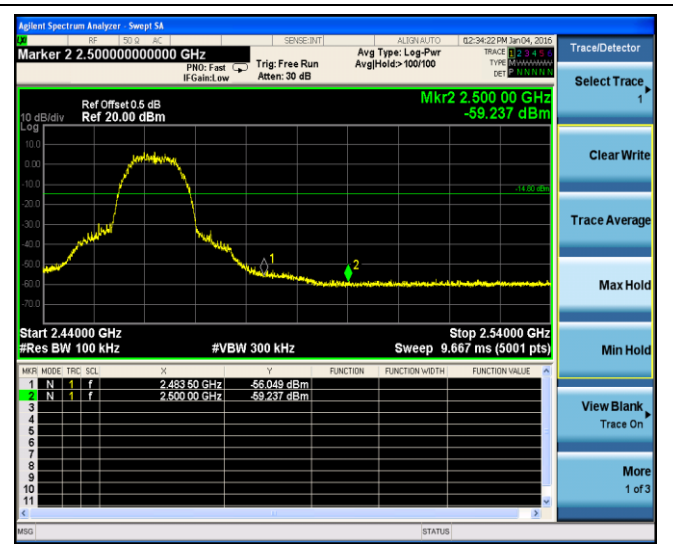


Right Band edge



802.11g

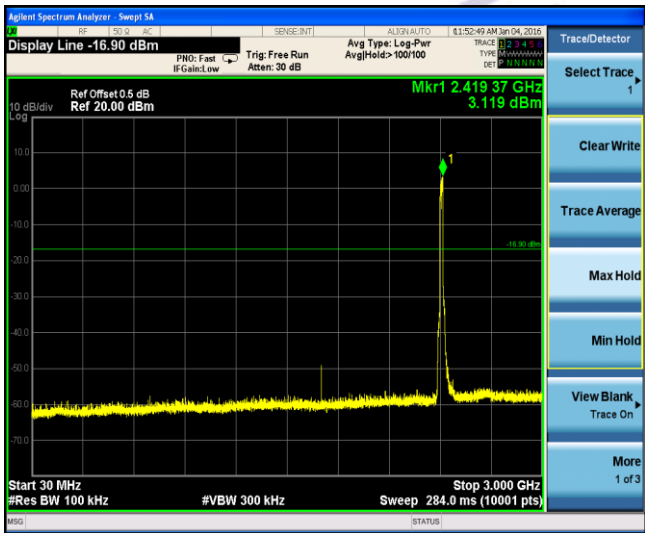


CH01

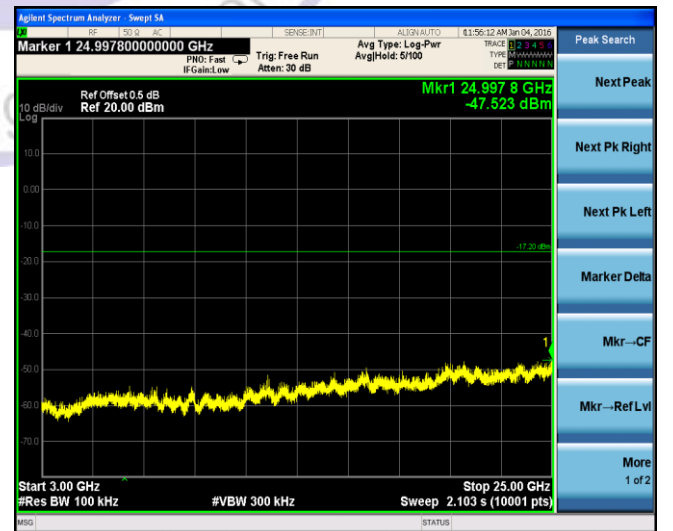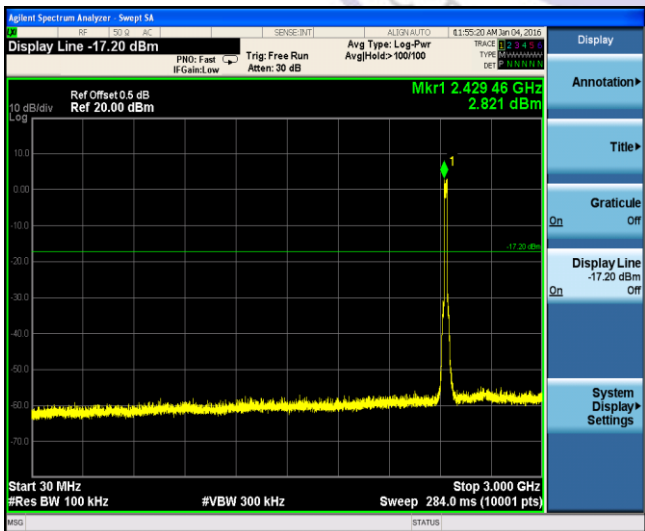

CH06

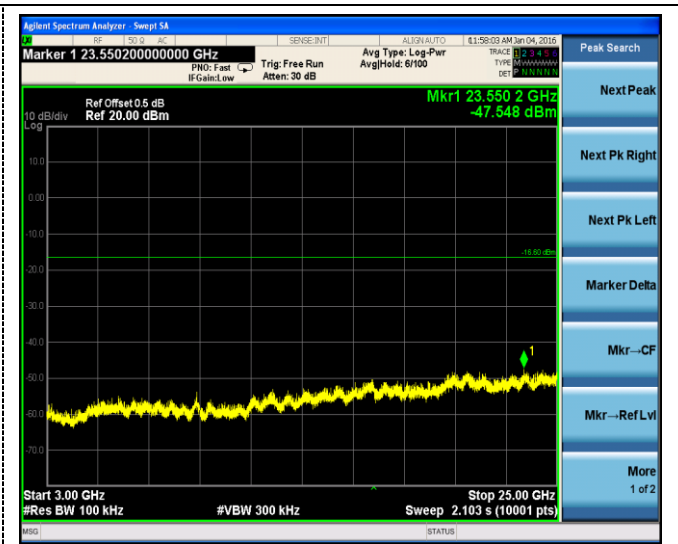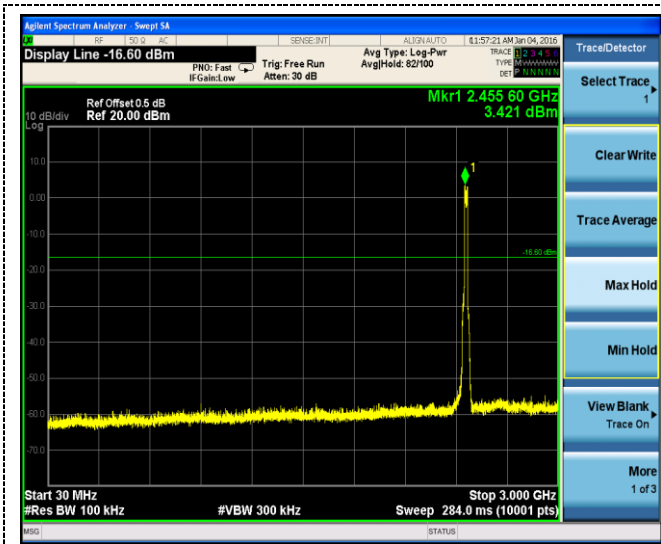



CH11

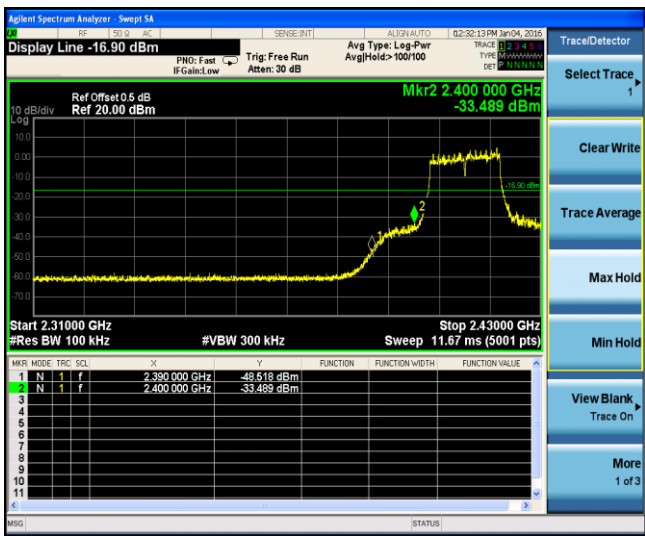

Left Band edge

Right Band edge

802.11n(HT20)

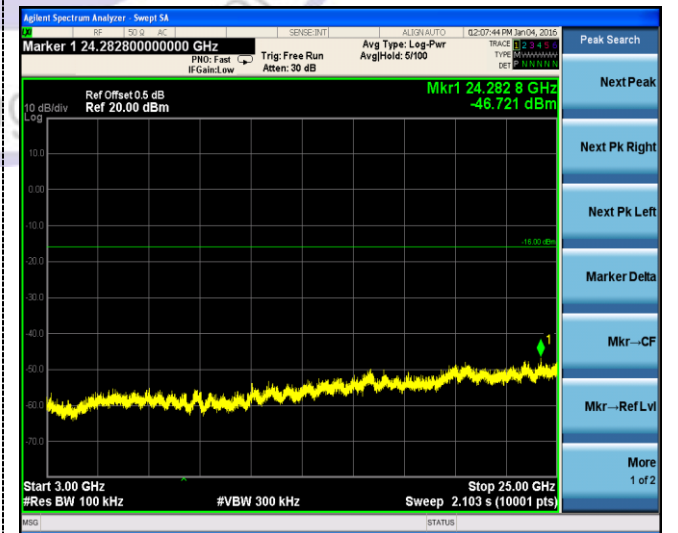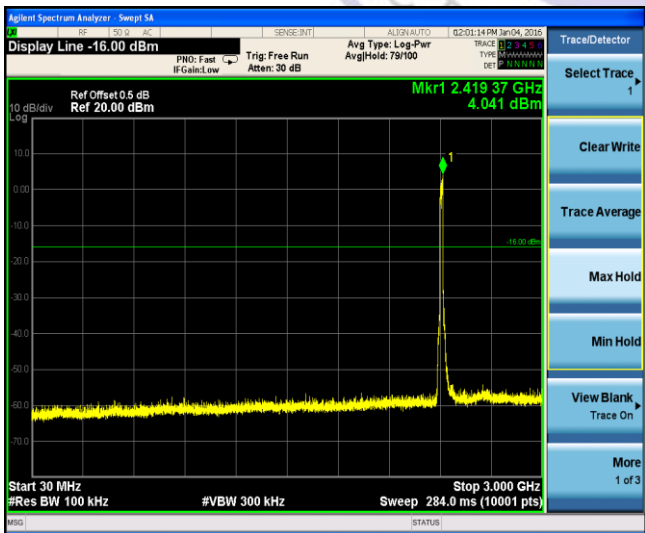

CH01