

# RF TEST REPORT



Report No.: 15071187-FCC-R1

Supersede Report No.: N/A

|                                                                                                                                      |                                                                        |  |
|--------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------|--|
| Applicant                                                                                                                            | Quality One Wireless LLC                                               |  |
| Product Name                                                                                                                         | 3G Mobile Phone                                                        |  |
| Model No.                                                                                                                            | Z219                                                                   |  |
| Serial No.                                                                                                                           | N/A                                                                    |  |
| Test Standard                                                                                                                        | FCC Part 22(H), FCC Part 24(E); FCC Part 27:2014; ANSI/TIAC603 D: 2010 |  |
| Test Date                                                                                                                            | October 22 to December 09, 2015                                        |  |
| Issue Date                                                                                                                           | December 19, 2015                                                      |  |
| Test Result                                                                                                                          | <input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail |  |
| Equipment complied with the specification                                                                                            | <input checked="" type="checkbox"/>                                    |  |
| Equipment did not comply with the specification                                                                                      | <input type="checkbox"/>                                               |  |
| <i>Winnie Zhang</i>                                                                                                                  | <i>David Huang</i>                                                     |  |
| Winnie Zhang<br>Test Engineer                                                                                                        | David Huang<br>Checked By                                              |  |
| This test report may be reproduced in full only<br>Test result presented in this test report is applicable to the tested sample only |                                                                        |  |

Issued by:

**SIEMIC (SHENZHEN-CHINA) LABORATORIES**

Zone A, Floor 1, Building 2 Wan Ye Long Technology Park

South Side of Zhoushi Road, Bao' an District, Shenzhen, Guangdong China 518108

Phone: +86 0755 2601 4629801 Email: [China@siemic.com.cn](mailto:China@siemic.com.cn)

## Laboratories Introduction

SIEMIC, headquartered in the heart of Silicon Valley, with superior facilities in US and Asia, is one of the leading independent testing and certification facilities providing customers with one-stop shop services for Compliance Testing and Global Certifications.



In addition to testing and certification, SIEMIC provides initial design reviews and compliance management throughout a project. Our extensive experience with China, Asia Pacific, North America, European, and International compliance requirements, assures the fastest, most cost effective way to attain regulatory compliance for the global markets.

### Accreditations for Conformity Assessment

| Country/Region | Scope                              |
|----------------|------------------------------------|
| USA            | EMC, RF/Wireless, SAR, Telecom     |
| Canada         | EMC, RF/Wireless, SAR, Telecom     |
| Taiwan         | EMC, RF, Telecom, SAR, Safety      |
| Hong Kong      | RF/Wireless, SAR, Telecom          |
| Australia      | EMC, RF, Telecom, SAR, Safety      |
| Korea          | EMI, EMS, RF, SAR, Telecom, Safety |
| Japan          | EMI, RF/Wireless, SAR, Telecom     |
| Singapore      | EMC, RF, SAR, Telecom              |
| Europe         | EMC, RF, SAR, Telecom, Safety      |

|             |                 |
|-------------|-----------------|
| Test Report | 15071187-FCC-R1 |
| Page        | 3 of 58         |

This page has been left blank intentionally.

# CONTENTS

|                                                                          |           |
|--------------------------------------------------------------------------|-----------|
| <b>1. REPORT REVISION HISTORY .....</b>                                  | <b>5</b>  |
| <b>2. CUSTOMER INFORMATION .....</b>                                     | <b>5</b>  |
| <b>3. TEST SITE INFORMATION.....</b>                                     | <b>5</b>  |
| <b>4. EQUIPMENT UNDER TEST (EUT) INFORMATION.....</b>                    | <b>6</b>  |
| <b>5. TEST SUMMARY .....</b>                                             | <b>8</b>  |
| <b>6. MEASUREMENTS, EXAMINATION AND DERIVED RESULTS .....</b>            | <b>9</b>  |
| 6.1 RF EXPOSURE (SAR).....                                               | 9         |
| 6.2 RF OUTPUT POWER.....                                                 | 10        |
| 6.3 PEAK-AVERAGE RATIO.....                                              | 18        |
| 6.4 MODULATION CHARACTERISTIC.....                                       | 20        |
| 6.5 OCCUPIED BANDWIDTH.....                                              | 21        |
| 6.6 SPURIOUS EMISSIONS AT ANTENNA TERMINALS .....                        | 26        |
| 6.7 SPURIOUS RADIATED EMISSIONS.....                                     | 32        |
| 6.8 BAND EDGE.....                                                       | 38        |
| 6.9 FREQUENCY STABILITY .....                                            | 43        |
| <b>ANNEX A. TEST INSTRUMENT.....</b>                                     | <b>48</b> |
| <b>ANNEX B. EUT AND TEST SETUP PHOTOGRAPHS.....</b>                      | <b>49</b> |
| <b>ANNEX C. TEST SETUP AND SUPPORTING EQUIPMENT.....</b>                 | <b>54</b> |
| <b>ANNEX C.II. EUT OPERATING CONKITIONS.....</b>                         | <b>56</b> |
| <b>ANNEX D. USER MANUAL / BLOCK DIAGRAM / SCHEMATICS / PARTLIST.....</b> | <b>57</b> |
| <b>ANNEX E. DECLARATION OF SIMILARITY.....</b>                           | <b>58</b> |

## 1. Report Revision History

| Report No.      | Report Version | Description               | Issue Date        |
|-----------------|----------------|---------------------------|-------------------|
| 15071187-FCC-R1 | NONE           | Original                  | December 09,2015  |
| 15071187-FCC-R1 | V1             | Change EUT Photo and data | December 19, 2015 |
|                 |                |                           |                   |
|                 |                |                           |                   |
|                 |                |                           |                   |
|                 |                |                           |                   |

## 2. Customer information

|                  |                                                                         |
|------------------|-------------------------------------------------------------------------|
| Applicant Name   | Quality One Wireless LLC                                                |
| Applicant Add    | 1500 Tradeport Drive Orlando, FL 32824                                  |
| Manufacturer     | Shenzhen Haierhea Telecom Co.,Ltd.                                      |
| Manufacturer Add | Room 418,Block M-3,Middle of Hi-Tech Park,Nanshan,Shenzhen,China 518057 |

## 3. Test site information

|                      |                                                                                                                                              |
|----------------------|----------------------------------------------------------------------------------------------------------------------------------------------|
| Lab performing tests | SIEMIC (Shenzhen-China) LABORATORIES                                                                                                         |
| Lab Address          | Zone A, Floor 1, Building 2 Wan Ye Long Technology Park<br>South Side of Zhoushi Road, Bao' an District, Shenzhen, Guangdong China<br>518108 |
| FCC Test Site No.    | 718246                                                                                                                                       |
| IC Test Site No.     | 4842E-1                                                                                                                                      |
| Test Software        | Radiated Emission Program-To Shenzhen v2.0                                                                                                   |

## 4. Equipment under Test (EUT) Information

|                               |                                                                                                                                                                                                                                                                                                                                                                                  |
|-------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description of EUT:           | 3G Mobile Phone                                                                                                                                                                                                                                                                                                                                                                  |
| Main Model:                   | Z219                                                                                                                                                                                                                                                                                                                                                                             |
| Serial Model:                 | N/A                                                                                                                                                                                                                                                                                                                                                                              |
| Date EUT received:            | October 21, 2015                                                                                                                                                                                                                                                                                                                                                                 |
| Test Date(s):                 | October 22 to December 09, 2015                                                                                                                                                                                                                                                                                                                                                  |
| Equipment Category :          | PCE                                                                                                                                                                                                                                                                                                                                                                              |
| Antenna Gain:                 | GSM850: -3dBi<br>PCS1900: -3 dBi<br>UMTS-FDD Band V: -3 dBi<br>UMTS-FDD Band IV: -3 dBi<br>UMTS-FDD Band II: -3 dBi<br>Bluetooth: -1 dBi<br>GPS:-1 dBi                                                                                                                                                                                                                           |
| Type of Modulation:           | GSM / GPRS: GMSK<br>UMTS-FDD: QPSK, 16QAM<br>Bluetooth: GFSK, $\pi$ /4DQPSK, 8DPSK<br>GPS:BPSK                                                                                                                                                                                                                                                                                   |
| RF Operating Frequency (ies): | GSM850 TX: 824.2 ~ 848.8 MHz; RX: 869.2 ~ 893.8 MHz<br>PCS1900 TX: 1850.2 ~ 1909.8 MHz; RX: 1930.2 ~ 1989.8 MHz<br>UMTS-FDD Band V TX: 826.4 ~ 846.6 MHz; RX: 871.4 ~ 891.6 MHz<br>UMTS-FDD Band IV TX:1712.4 ~ 1752.6 MHz;<br>RX : 2112.4 ~ 2152.6 MHz<br>UMTS-FDD Band II TX:1852.4 ~ 1907.6 MHz;<br>RX: 1932.4 ~ 1987.6 MHz<br>Bluetooth: 2402-2480 MHz<br>GPS RX:1575.42 MHz |

|                                           |                                                                                                                                                                       |
|-------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Maximum Conducted<br>AV Power to Antenna: | GSM850: 31.98 dBm<br>PCS1900: 30.73 dBm<br>UMTS-FDD Band V : 22.72 dBm<br>UMTS-FDD Band II : 23.09 dBm<br>UMTS-FDD Band IV: 22.73 dBm                                 |
| ERP/EIRP:                                 | GSM850: 26.59 dBm / ERP<br>PCS1900: 28.49 dBm / EIRP<br>UMTS-FDD Band V : 17.86 dBm / ERP<br>UMTS-FDD Band II : 20.46 dBm / EIRP<br>UMTS-FDD Band IV: 19.60 dBm/ EIRP |
| Number of Channels:                       | GSM 850: 124CH<br>PCS1900: 299CH<br>UMTS-FDD Band V : 102CH<br>UMTS-FDD Band IV: 202CH<br>UMTS-FDD Band II : 277CH<br>Bluetooth: 79CH<br>GPS:1CH                      |
| Port:                                     | Power Port, Earphone Port, USB Port                                                                                                                                   |
| Input Power:                              | Adapter:<br>Model: JT-H050050<br>Input: AC 100-240V; 50/60Hz;150mA<br>Output: DC 5.0V,500mA<br>Battery:<br>Model: Z219<br>Spec:3.7Vcc,800mAh,2.96Wh                   |
| Trade Name :                              | N/A                                                                                                                                                                   |
| GPRS Multi-slot class                     | 8/10/12                                                                                                                                                               |
| FCC ID:                                   | 2AGP4Z219                                                                                                                                                             |

## 5. Test Summary

The product was tested in accordance with the following specifications.

All testing has been performed according to below product classification:

| FCC Rules                                                          | Description of Test                                                    | Result     |
|--------------------------------------------------------------------|------------------------------------------------------------------------|------------|
| § 1.1307; § 2.1093                                                 | RF Exposure (SAR)                                                      | Compliance |
| §2.1046; § 22.913(a); § 24.232(c);<br>§ 27.50(c.10) ; § 27.50(d.4) | RF Output Power                                                        | Compliance |
| § 24.232 (d) ; § 27.50(d)                                          | Peak-Average Ratio                                                     | Compliance |
| § 2.1047                                                           | Modulation Characteristics                                             | Compliance |
| § 2.1049; § 22.905; § 22.917;<br>§ 24.238; § 27.53(a.5)            | 99% & -26 dB Occupied Bandwidth                                        | Compliance |
| § 2.1051; § 22.917(a);<br>§ 24.238(a); § 27.53(h)                  | Spurious Emissions at Antenna Terminal                                 | Compliance |
| § 2.1053; § 22.917(a);<br>§ 24.238(a); § 27.53(h)                  | Field Strength of Spurious Radiation                                   | Compliance |
| § 22.917(a); § 24.238(a);<br>§ 27.53(h)                            | Out of band emission, Band Edge                                        | Compliance |
| § 2.1055; § 22.355; § 24.235;<br>§ 27.5(h); § 27.54                | Frequency stability vs. temperature<br>Frequency stability vs. voltage | Compliance |

Note: Testing was performed by configuring EUT to maximum output power status, the declared output power class for different

### Measurement Uncertainty

| Emissions                                    |                                                                                                                                                 |               |
|----------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------|---------------|
| Test Item                                    | Description                                                                                                                                     | Uncertainty   |
| Band Edge and Radiated<br>Spurious Emissions | Confidence level of approximately 95% (in the case where distributions are normal), with a coverage factor of 2 (for EUTs < 0.5m X 0.5m X 0.5m) | +5.6dB/-4.5dB |
| -                                            | -                                                                                                                                               | -             |



## 6. MEASUREMENTS, EXAMINATION AND DERIVED RESULTS

### 6.1 RF Exposure (SAR)

Test Result: Pass

The EUT is a portable device, thus requires SAR evaluation;

Please refer to RF Exposure Evaluation Report: 15071187-FCC-H.


## 6.2 RF Output Power

|                      |                   |
|----------------------|-------------------|
| Temperature          | 28°C              |
| Relative Humidity    | 52%               |
| Atmospheric Pressure | 1028mbar          |
| Test date :          | November 28, 2015 |
| Tested By :          | Winnie Zhang      |

### Requirement(s):

| Spec        | Item | Requirement  | Applicable                          |
|-------------|------|--------------|-------------------------------------|
| §22.913 (a) | a)   | ERP:38.45dBm | <input checked="" type="checkbox"/> |
| §24.232 (c) | b)   | EIRP:33dBm   | <input checked="" type="checkbox"/> |
| §27.50 (c)  | c)   | EIRP: 30dBm  | <input checked="" type="checkbox"/> |

### Test Setup



### Test Procedure

#### For Conducted Power:

- The transmitter output port was connected to base station.
- Set EUT at maximum power through base station.
- Select lowest, middle, and highest channels for each band and different test mode.

#### For ERP/EIRP:

- The transmitter was placed on a wooden turntable, and it was transmitting into a non-radiating load which was also placed on the turntable.
- The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis.
- The frequency range up to tenth harmonic of the fundamental frequency was investigated.
- Remove the EUT and replace it with substitution antenna. A signal

|             |                 |
|-------------|-----------------|
| Test Report | 15071187-FCC-R1 |
| Page        | 11 of 58        |

|        |                                                                                                                                                                                                                                                                                                                                                                                              |
|--------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|        | <p>generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the spurious emissions were measured by the substitution.</p> <ul style="list-style-type: none"> <li>- Spurious emissions in dB = 10 log (TX power in Watts/0.001) – the absolute level</li> <li>- Spurious attenuation limit in dB = 43 + 10 Log10 (power out in Watts).</li> </ul> |
| Remark |                                                                                                                                                                                                                                                                                                                                                                                              |
| Result | <input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail                                                                                                                                                                                                                                                                                                                       |

Test Data     Yes                       N/A

Test Plot     Yes (See below)             N/A

## Conducted Power

### GSM Mode:

| Burst Average Power (dBm);               |              |       |       |                        |              |       |        |                        |
|------------------------------------------|--------------|-------|-------|------------------------|--------------|-------|--------|------------------------|
| Band                                     | GSM850       |       |       |                        | PCS1900      |       |        |                        |
| Channel                                  | 128          | 190   | 251   | Tune up Power tolerant | 512          | 661   | 810    | Tune up Power tolerant |
| Frequency (MHz)                          | 824.2        | 836.6 | 848.8 | /                      | 1850.2       | 1880  | 1909.8 | /                      |
| GSM Voice (1 uplink),GMSK                | <b>31.98</b> | 31.97 | 31.93 | 31±1                   | <b>30.73</b> | 30.42 | 30.25  | 30±1                   |
| GPRS Multi-Slot Class 8 (1 uplink),GMSK  | 31.96        | 31.95 | 31.92 | 31±1                   | 30.24        | 30.41 | 30.71  | 30±1                   |
| GPRS Multi-Slot Class 10 (2 uplink) GMSK | 31.51        | 31.48 | 31.44 | 31±1                   | 29.62        | 29.78 | 30.02  | 30±1                   |
| GPRS Multi-Slot Class 12 (4 uplink) GMSK | 28.91        | 28.95 | 28.93 | 28±1                   | 26.76        | 26.89 | 27.11  | 28±1                   |

Remark :

GPRS, CS1 coding scheme.

Multi-Slot Class 8 , Support Max 4 downlink, 1 uplink , 5 working link

Multi-Slot Class 10 , Support Max 4 downlink, 2 uplink , 5 working link

Multi-Slot Class 12 , Support Max 4 downlink, 4 uplink , 5 working link

**Note: Since GSM mode has higher power, so the test items below were not performed to GPRS mode.**

## UMTS Mode:

### UMTS-FDD Band V

| Band/ Time Slot configuration | Channel | Frequency | Average power (dBm) | Tune up Power tolerant |
|-------------------------------|---------|-----------|---------------------|------------------------|
| RMC<br>12.2kbps               | 4132    | 826.4     | 22.46               | 22±1                   |
|                               | 4175    | 835       | <b>22.72</b>        | 22±1                   |
|                               | 4233    | 846.6     | 22.27               | 22±1                   |
| HSDPA<br>Subtest1             | 4132    | 826.4     | 21.34               | 21.3±1                 |
|                               | 4175    | 835       | 21.51               | 21.3±1                 |
|                               | 4233    | 846.6     | 21.31               | 21.3±1                 |
| HSDPA<br>Subtest2             | 4132    | 826.4     | 21.29               | 21.3±1                 |
|                               | 4175    | 835       | 21.38               | 21.3±1                 |
|                               | 4233    | 846.6     | 21.25               | 21.3±1                 |
| HSDPA<br>Subtest3             | 4132    | 826.4     | 21.16               | 21.3±1                 |
|                               | 4175    | 835       | 21.22               | 21.3±1                 |
|                               | 4233    | 846.6     | 21.11               | 21.3±1                 |
| HSDPA<br>Subtest4             | 4132    | 826.4     | 21.34               | 21.3±1                 |
|                               | 4175    | 835       | 21.47               | 21.3±1                 |
|                               | 4233    | 846.6     | 21.28               | 21.3±1                 |
| HSUPA<br>Subtest1             | 4132    | 826.4     | 20.88               | 21.3±1                 |
|                               | 4175    | 835       | 21.08               | 21.3±1                 |
|                               | 4233    | 846.6     | 20.79               | 21.3±1                 |
| HSUPA<br>Subtest2             | 4132    | 826.4     | 21.36               | 21.3±1                 |
|                               | 4175    | 835       | 21.45               | 21.3±1                 |
|                               | 4233    | 846.6     | 21.31               | 21.3±1                 |
| HSUPA<br>Subtest3             | 4132    | 826.4     | 20.96               | 21.3±1                 |
|                               | 4175    | 835       | 21.25               | 21.3±1                 |
|                               | 4233    | 846.6     | 20.89               | 21.3±1                 |
| HSUPA<br>Subtest4             | 4132    | 826.4     | 21.25               | 21.3±1                 |
|                               | 4175    | 835       | 21.39               | 21.3±1                 |
|                               | 4233    | 846.6     | 21.22               | 21.3±1                 |
| HSUPA<br>Subtest5             | 4132    | 826.4     | 21.32               | 21.3±1                 |
|                               | 4175    | 835       | 21.47               | 21.3±1                 |
|                               | 4233    | 846.6     | 21.26               | 21.3±1                 |

## UMTS-FDD Band II

| Band/ Time Slot configuration | Channel | Frequency | Average power (dBm) | Tune up Power tolerant |
|-------------------------------|---------|-----------|---------------------|------------------------|
| RMC<br>12.2kbps               | 9262    | 1852.4    | 22.91               | 23±1                   |
|                               | 9400    | 1880      | <b>23.09</b>        | 23±1                   |
|                               | 9538    | 1907.6    | 22.87               | 23±1                   |
| HSDPA<br>Subtest1             | 9262    | 1852.4    | 21.34               | 21.3±1                 |
|                               | 9400    | 1880      | 21.42               | 21.3±1                 |
|                               | 9538    | 1907.6    | 21.31               | 21.3±1                 |
| HSDPA<br>Subtest2             | 9262    | 1852.4    | 21.36               | 21.3±1                 |
|                               | 9400    | 1880      | 21.39               | 21.3±1                 |
|                               | 9538    | 1907.6    | 21.31               | 21.3±1                 |
| HSDPA<br>Subtest3             | 9262    | 1852.4    | 21.32               | 21.3±1                 |
|                               | 9400    | 1880      | 21.38               | 21.3±1                 |
|                               | 9538    | 1907.6    | 21.31               | 21.3±1                 |
| HSDPA<br>Subtest4             | 9262    | 1852.4    | 21.29               | 21.3±1                 |
|                               | 9400    | 1880      | 21.25               | 21.3±1                 |
|                               | 9538    | 1907.6    | 21.26               | 21.3±1                 |
| HSUPA<br>Subtest1             | 9262    | 1852.4    | 20.86               | 21.3±1                 |
|                               | 9400    | 1880      | 20.95               | 21.3±1                 |
|                               | 9538    | 1907.6    | 20.84               | 21.3±1                 |
| HSUPA<br>Subtest2             | 9262    | 1852.4    | 20.96               | 21.3±1                 |
|                               | 9400    | 1880      | 20.99               | 21.3±1                 |
|                               | 9538    | 1907.6    | 20.93               | 21.3±1                 |
| HSUPA<br>Subtest3             | 9262    | 1852.4    | 20.35               | 21.3±1                 |
|                               | 9400    | 1880      | 20.46               | 21.3±1                 |
|                               | 9538    | 1907.6    | 20.62               | 21.3±1                 |
| HSUPA<br>Subtest4             | 9262    | 1852.4    | 20.58               | 21.3±1                 |
|                               | 9400    | 1880      | 20.41               | 21.3±1                 |
|                               | 9538    | 1907.6    | 20.55               | 21.3±1                 |
| HSUPA<br>Subtest5             | 9262    | 1852.4    | 20.78               | 21.3±1                 |
|                               | 9400    | 1880      | 20.85               | 21.3±1                 |
|                               | 9538    | 1907.6    | 20.74               | 21.3±1                 |

## UMTS-FDD Band IV

| Band/ Time Slot configuration | Channel | Frequency | Average power (dBm) | Tune up Power tolerant |
|-------------------------------|---------|-----------|---------------------|------------------------|
| RMC<br>12.2kbps               | 1313    | 1712.6    | <b>22.73</b>        | 22±1                   |
|                               | 1413    | 1732.6    | 22.47               | 22±1                   |
|                               | 1512    | 1752.4    | 22.34               | 22±1                   |
| HSDPA<br>Subtest1             | 1313    | 1712.6    | 21.35               | 21.3±1                 |
|                               | 1413    | 1732.6    | 21.34               | 21.3±1                 |
|                               | 1512    | 1752.4    | 21.41               | 21.3±1                 |
| HSDPA<br>Subtest2             | 1313    | 1712.6    | 21.44               | 21.3±1                 |
|                               | 1413    | 1732.6    | 21.38               | 21.3±1                 |
|                               | 1512    | 1752.4    | 21.35               | 21.3±1                 |
| HSDPA<br>Subtest3             | 1313    | 1712.6    | 20.97               | 21.3±1                 |
|                               | 1413    | 1732.6    | 20.85               | 21.3±1                 |
|                               | 1512    | 1752.4    | 20.81               | 21.3±1                 |
| HSDPA<br>Subtest4             | 1313    | 1712.6    | 20.88               | 21.3±1                 |
|                               | 1413    | 1732.6    | 20.78               | 21.3±1                 |
|                               | 1512    | 1752.4    | 20.76               | 21.3±1                 |
| HSUPA<br>Subtest1             | 1313    | 1712.6    | 21.21               | 21.3±1                 |
|                               | 1413    | 1732.6    | 21.18               | 21.3±1                 |
|                               | 1512    | 1752.4    | 21.15               | 21.3±1                 |
| HSUPA<br>Subtest2             | 1313    | 1712.6    | 21.45               | 21.3±1                 |
|                               | 1413    | 1732.6    | 21.38               | 21.3±1                 |
|                               | 1512    | 1752.4    | 21.33               | 21.3±1                 |
| HSUPA<br>Subtest3             | 1313    | 1712.6    | 21.46               | 21.3±1                 |
|                               | 1413    | 1732.6    | 21.42               | 21.3±1                 |
|                               | 1512    | 1752.4    | 21.39               | 21.3±1                 |
| HSUPA<br>Subtest4             | 1313    | 1712.6    | 21.15               | 21.3±1                 |
|                               | 1413    | 1732.6    | 21.12               | 21.3±1                 |
|                               | 1512    | 1752.4    | 21.09               | 21.3±1                 |
| HSUPA<br>Subtest5             | 1313    | 1712.6    | 21.34               | 21.3±1                 |
|                               | 1413    | 1732.6    | 21.32               | 21.3±1                 |
|                               | 1512    | 1752.4    | 21.24               | 21.3±1                 |

## ERP & EIRP

### ERP for Cellular Band (Part 22H)

| Frequency (MHz) | Substituted level (dBm) | Antenna Polarization | Antenna Gain correction (dBi) | Cable Loss (dB) | Absolute Level (dBm) | Limit (dBm) |
|-----------------|-------------------------|----------------------|-------------------------------|-----------------|----------------------|-------------|
| 824.2           | 20.17                   | V                    | 6.8                           | 0.53            | 26.44                | 38.45       |
| 824.2           | 19.44                   | H                    | 6.8                           | 0.53            | 25.71                | 38.45       |
| 836.6           | 20.23                   | V                    | 6.8                           | 0.53            | 26.5                 | 38.45       |
| 836.6           | 19.32                   | H                    | 6.8                           | 0.53            | 25.59                | 38.45       |
| 848.8           | 20.22                   | V                    | 6.9                           | 0.53            | 26.59                | 38.45       |
| 848.8           | 19.6                    | H                    | 6.9                           | 0.53            | 25.97                | 38.45       |

### EIRP for PCS Band (Part 24E)

| Frequency (MHz) | Substituted level (dBm) | Antenna Polarization | Antenna Gain correction (dBi) | Cable Loss (dB) | Absolute Level (dBm) | Limit (dBm) |
|-----------------|-------------------------|----------------------|-------------------------------|-----------------|----------------------|-------------|
| 1850.2          | 21.42                   | V                    | 7.88                          | 0.85            | 28.45                | 33          |
| 1850.2          | 20.66                   | H                    | 7.88                          | 0.85            | 27.69                | 33          |
| 1880            | 21.45                   | V                    | 7.88                          | 0.85            | 28.48                | 33          |
| 1880            | 20.78                   | H                    | 7.88                          | 0.85            | 27.81                | 33          |
| 1909.8          | 21.42                   | V                    | 7.86                          | 0.85            | 28.43                | 33          |
| 1909.8          | 20.66                   | H                    | 7.86                          | 0.85            | 27.67                | 33          |

### ERP for UMTS-FDD Band V (Part 22H)

| Frequency (MHz) | Substituted level (dBm) | Antenna Polarization | Antenna Gain correction (dBi) | Cable Loss (dB) | Absolute Level (dBm) | Limit (dBm) |
|-----------------|-------------------------|----------------------|-------------------------------|-----------------|----------------------|-------------|
| 826.4           | 11.56                   | V                    | 6.8                           | 0.53            | 17.83                | 38.45       |
| 826.4           | 10.79                   | H                    | 6.8                           | 0.53            | 17.06                | 38.45       |
| 835             | 11.59                   | V                    | 6.8                           | 0.53            | 17.86                | 38.45       |
| 835             | 10.79                   | H                    | 6.8                           | 0.53            | 17.06                | 38.45       |
| 846.6           | 11.42                   | V                    | 6.9                           | 0.53            | 17.79                | 38.45       |
| 846.6           | 10.89                   | H                    | 6.9                           | 0.53            | 17.26                | 38.45       |



### EIRP for UMTS-FDD Band II (Part 24E)

| Frequency (MHz) | Substituted level (dBm) | Antenna Polarization | Antenna Gain correction (dBi) | Cable Loss (dB) | Absolute Level (dBm) | Limit (dBm) |
|-----------------|-------------------------|----------------------|-------------------------------|-----------------|----------------------|-------------|
| 1852.4          | 13.17                   | V                    | 7.88                          | 0.85            | 20.2                 | 33          |
| 1852.4          | 12.45                   | H                    | 7.88                          | 0.85            | 19.48                | 33          |
| 1880            | 13.35                   | V                    | 7.88                          | 0.85            | 20.38                | 33          |
| 1880            | 12.24                   | H                    | 7.88                          | 0.85            | 19.27                | 33          |
| 1907.6          | 13.45                   | V                    | 7.86                          | 0.85            | 20.46                | 33          |
| 1907.6          | 12.61                   | H                    | 7.86                          | 0.85            | 19.62                | 33          |


### EIRP for UMTS-FDD Band IV (Part 27)

| Frequency (MHz) | Substituted level (dBm) | Antenna Polarization | Antenna Gain correction (dBi) | Cable Loss (dB) | Absolute Level (dBm) | Limit (dBm) |
|-----------------|-------------------------|----------------------|-------------------------------|-----------------|----------------------|-------------|
| 1712.4          | 12.57                   | V                    | 7.76                          | 0.82            | 19.51                | 30          |
| 1712.4          | 11.32                   | H                    | 7.76                          | 0.82            | 18.26                | 30          |
| 1740            | 12.66                   | V                    | 7.76                          | 0.82            | 19.6                 | 30          |
| 1740            | 11.24                   | H                    | 7.76                          | 0.82            | 18.18                | 30          |
| 1752.6          | 12.55                   | V                    | 7.74                          | 0.82            | 19.47                | 30          |
| 1752.6          | 11.41                   | H                    | 7.74                          | 0.82            | 18.33                | 30          |

### 6.3 Peak-Average Ratio

|                      |                   |
|----------------------|-------------------|
| Temperature          | 28°C              |
| Relative Humidity    | 52%               |
| Atmospheric Pressure | 1028mbar          |
| Test date :          | November 28, 2015 |
| Tested By :          | Winnie Zhang      |

Requirement(s):

| Spec                     | Item                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | Requirement                                                               | Applicable                          |
|--------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------|-------------------------------------|
| §24.232(d)<br>§ 27.50(d) | a)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | The peak-to-average ratio (PAR) of the transmission may not exceed 13 dB. | <input checked="" type="checkbox"/> |
| Test Setup               |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |                                                                           |                                     |
| Test Procedure           | <p><b>According with KDB 971168</b></p> <ol style="list-style-type: none"> <li>1. The signal analyzer' s CCDF measurement profile is enabled</li> <li>2. Frequency = carrier center frequency</li> <li>3. Measurement BW &gt; Emission bandwidth of signal</li> <li>4. The signal analyzer was set to collect one million samples to generate the CCDF curve</li> <li>5. The measurement interval was set depending on the type of signal analyzed. For continuous signals (&gt;98% duty cycle), the measurement interval was set to 1ms. For burst transmissions, the spectrum analyzer is set to use an internal “ RF Burst” trigger that is synced with an incoming pulse and the measurement interval is set to less than the duration of the “ on time” of one burst to ensure that energy is only captured during a time in which the transmitter is operating at maximum power</li> </ol> |                                                                           |                                     |
| Remark                   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                                                                           |                                     |
| Result                   | <input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |                                                                           |                                     |

Test Data     Yes                       N/A  
 Test Plot     Yes (See below)             N/A

### GSM 1900 PK-AV POWER(PART 24E)

| Frequency<br>(MHz) | Conducted power(dBm) |         | Peak-Average<br>Ratio(PAR) |
|--------------------|----------------------|---------|----------------------------|
|                    | Peak                 | Average |                            |
| 1850.2             | 30.87                | 30.25   | 0.62                       |
| 1880               | 30.91                | 30.42   | 0.49                       |
| 1909.8             | 31.02                | 30.73   | 0.29                       |

### UMTS-FDD Band II PK-AV POWER(PART 24E)

| Frequency<br>(MHz) | Conducted power(dBm) |         | Peak-Average<br>Ratio(PAR) |
|--------------------|----------------------|---------|----------------------------|
|                    | Peak                 | Average |                            |
| 1852.4             | 25.97                | 22.91   | 3.06                       |
| 1880               | 26.27                | 23.09   | 3.18                       |
| 1907.6             | 25.83                | 22.87   | 2.96                       |

### UMTS-FDD Band IV PK-AV POWER (PART 27)

| Frequency<br>(MHz) | Conducted power(dBm) |         | Peak-Average<br>Ratio(PAR) |
|--------------------|----------------------|---------|----------------------------|
|                    | Peak                 | Average |                            |
| 1712.6             | 25.94                | 22.73   | 3.21                       |
| 1732.6             | 25.09                | 22.47   | 2.62                       |
| 1752.4             | 25.48                | 22.34   | 3.14                       |

## 6.4 Modulation Characteristic

According to FCC § 2.1047(d), Part 22H, 24E& Part 27 there is no specific requirement for digital modulation, therefore modulation characteristic is not presented.

According to FCC § 2.1033(c)(13) For equipment employing digital modulation techniques, a detailed description of the modulation system to be used, including the response characteristics (frequency, phase and amplitude) of any filters provided, and a description of the modulating wavetrain, shall be submitted for the maximum rated conditions under which the equipment will be operated.


Result: Pass.

Note: The mobile phone C240 meets the requirement of 3GPP standards

## 6.5 Occupied Bandwidth

|                      |                   |
|----------------------|-------------------|
| Temperature          | 28°C              |
| Relative Humidity    | 52%               |
| Atmospheric Pressure | 1028mbar          |
| Test date :          | November 28, 2015 |
| Tested By :          | Winnie Zhang      |

### Requirement(s):

| Spec                                                    | Item                                                                                                                                                                                                                                     | Requirement                 | Applicable                          |
|---------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------|-------------------------------------|
| §2.1049,<br>§22.917,<br>§22.905<br>§24.238<br>§27.53(a) | a)                                                                                                                                                                                                                                       | 99% Occupied Bandwidth(kHz) | <input checked="" type="checkbox"/> |
|                                                         | b)                                                                                                                                                                                                                                       | 26 dB Bandwidth(kHz)        | <input checked="" type="checkbox"/> |
| Test Setup                                              |                                                                                                                                                      |                             |                                     |
| Test Procedure                                          | <ul style="list-style-type: none"> <li>- The EUT was connected to Spectrum Analyzer and Base Station via power divider.</li> <li>- The 99% and 26 dB occupied bandwidth (BW) of the middle channel for the highest RF powers.</li> </ul> |                             |                                     |
| Remark                                                  |                                                                                                                                                                                                                                          |                             |                                     |
| Result                                                  | <input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail                                                                                                                                                                   |                             |                                     |

Test Data     Yes       N/A

Test Plot     Yes (See below)       N/A

### Cellular Band (Part 22H) result

| Channel | Frequency (MHz) | 99% Occupied Bandwidth (kHz) | 26 dB Bandwidth (kHz) |
|---------|-----------------|------------------------------|-----------------------|
| 128     | 824.2           | 247.7746                     | 319.518               |
| 190     | 836.6           | 248.1770                     | 320.915               |
| 251     | 848.8           | 250.0850                     | 321.270               |

### PCS Band (Part 24E) result

| Channel | Frequency (MHz) | 99% Occupied Bandwidth (kHz) | 26 dB Bandwidth (kHz) |
|---------|-----------------|------------------------------|-----------------------|
| 512     | 1850.2          | 248.7509                     | 319.399               |
| 661     | 1880.0          | 249.6643                     | 319.838               |
| 810     | 1909.8          | 247.1057                     | 316.485               |

### UMTS-FDD Band V (Part 22H)

| Channel | Frequency (MHz) | 99% Occupied Bandwidth (MHz) | 26 dB Bandwidth (MHz) |
|---------|-----------------|------------------------------|-----------------------|
| 4132    | 826.4           | 4.1455                       | 4.663                 |
| 4175    | 835.0           | 4.1714                       | 4.688                 |
| 4233    | 846.6           | 4.2230                       | 4.877                 |


### UMTS-FDD Band II (Part 24E)


| Channel | Frequency (MHz) | 99% Occupied Bandwidth (MHz) | 26 dB Bandwidth (MHz) |
|---------|-----------------|------------------------------|-----------------------|
| 9262    | 1852.4          | 4.1684                       | 4.700                 |
| 9400    | 1880.0          | 4.1610                       | 4.702                 |
| 9538    | 1907.6          | 4.1804                       | 4.717                 |

### UMTS-FDD Band IV (Part 27)


| Channel | Frequency (MHz) | 99% Occupied Bandwidth (MHz) | 26 dB Bandwidth (MHz) |
|---------|-----------------|------------------------------|-----------------------|
| 1313    | 1712.6          | 4.1567                       | 4.678                 |
| 1413    | 1732.6          | 4.1853                       | 4.720                 |
| 1512    | 1752.4          | 4.1763                       | 4.691                 |

### Test Plots

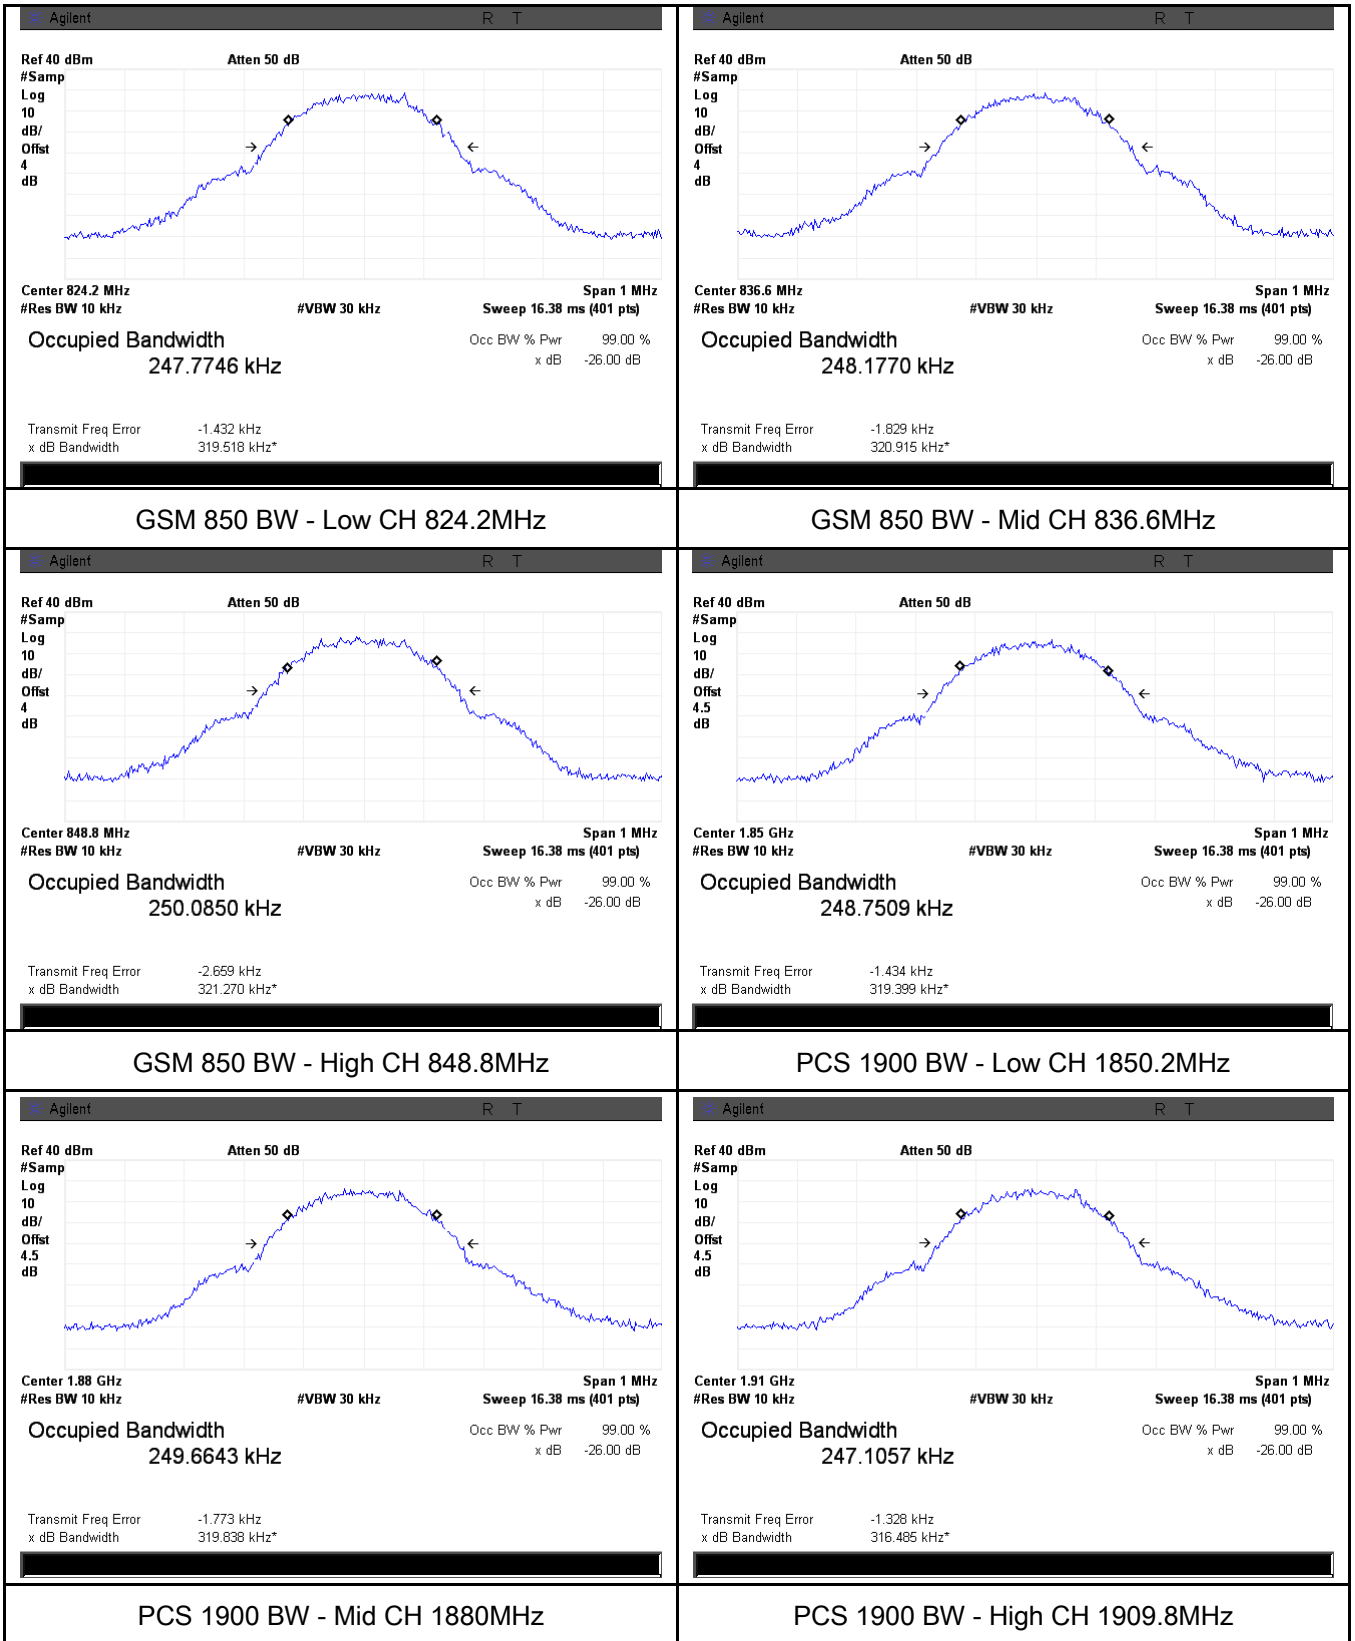


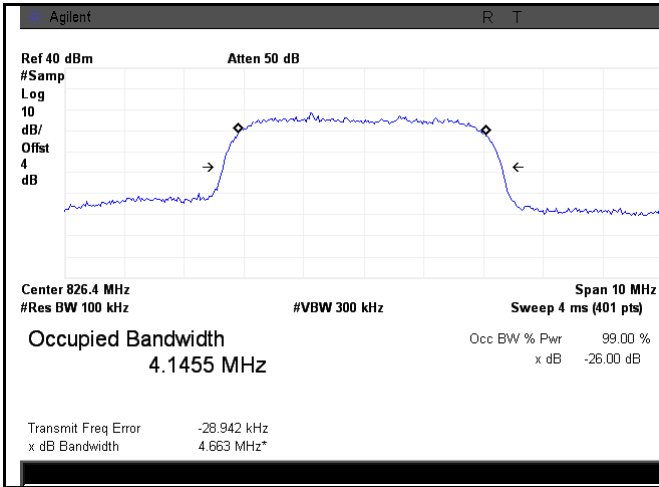


Band V BW - Low CH 826.6 MHz

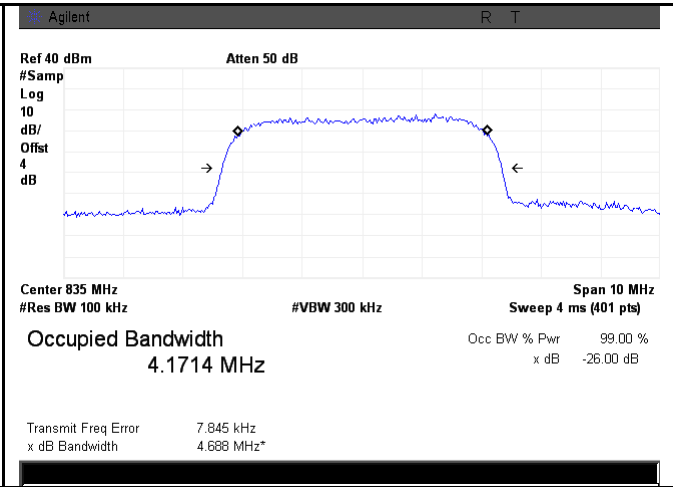


Band V BW - Mid CH 835.0 MHz

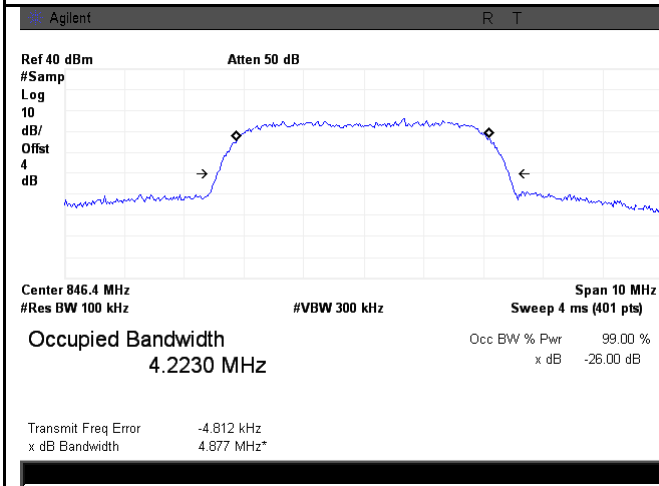


Band V BW - High CH 846.4 MHz

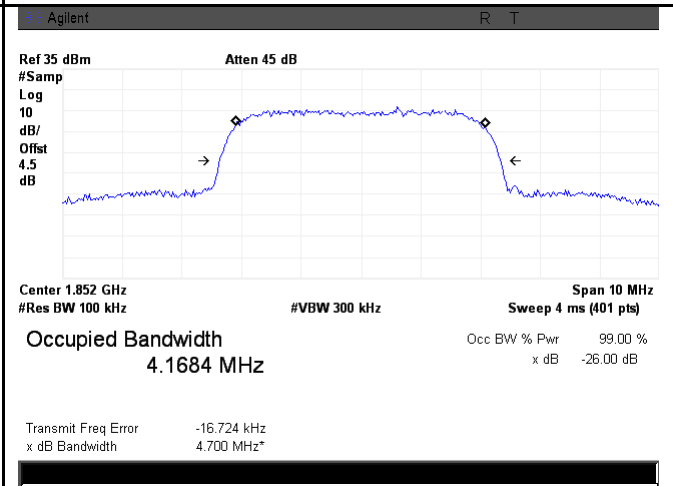

Band II BW - Low CH 1852.4MHz

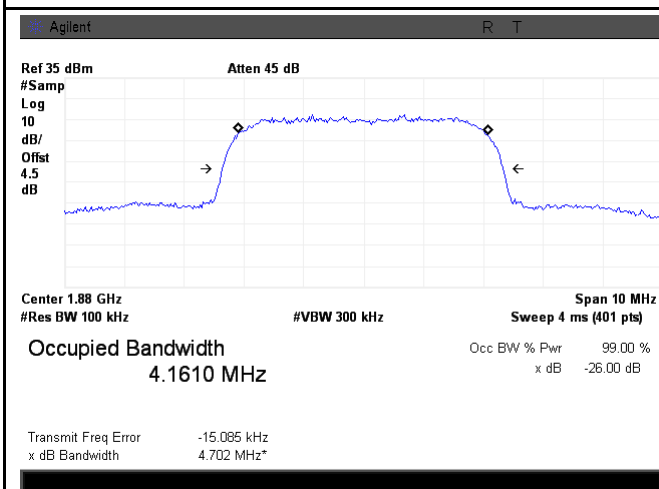


Band II BW - Mid CH 1880MHz

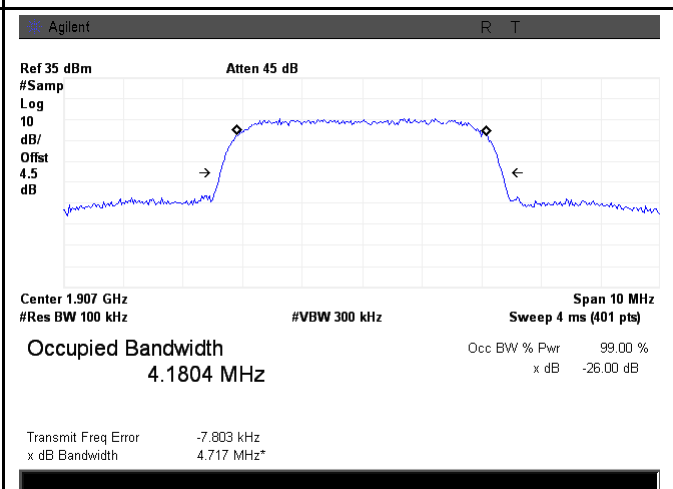


Band II BW - High CH 1907.6MHz




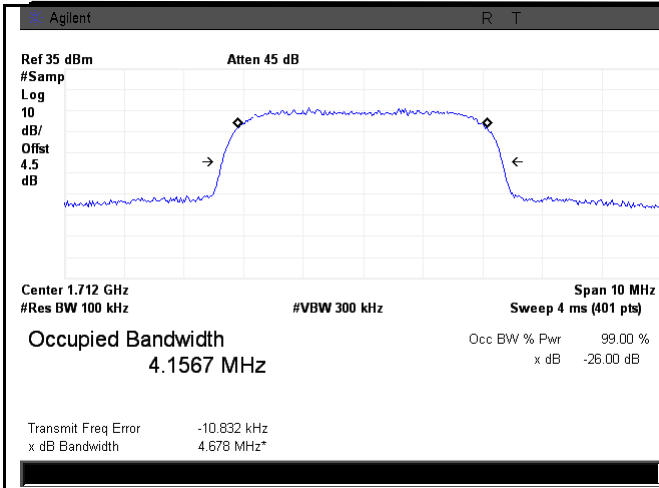

Band IV BW - Low CH 1852.4MHz

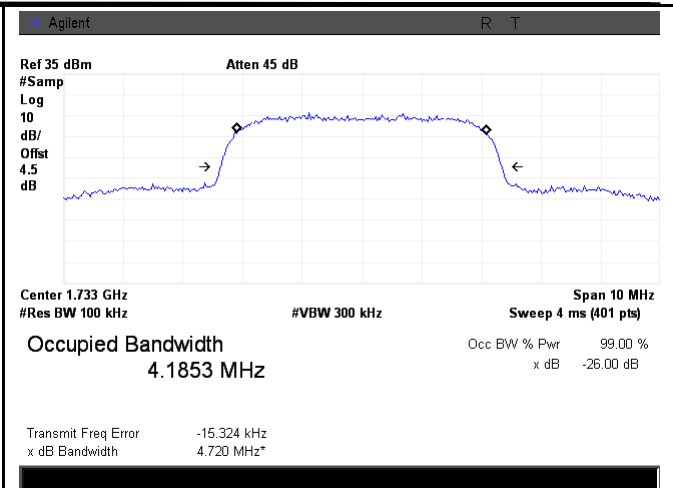

Band IVBW - Mid CH 1880MHz

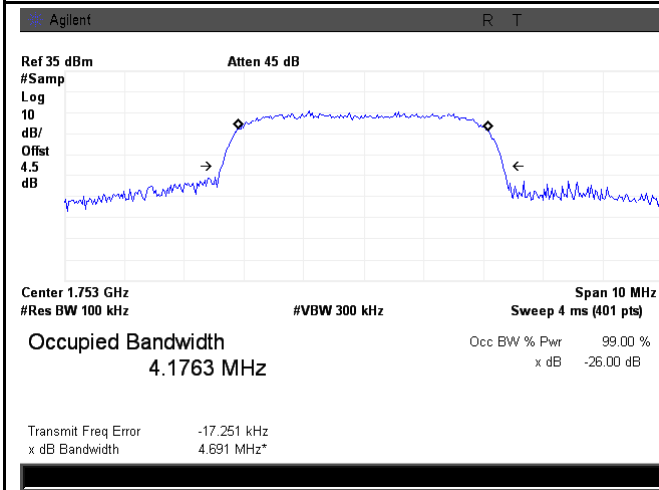

Band IV BW - High CH 1907.6MHz

## 6.6 Spurious Emissions at Antenna Terminals

|                      |                   |
|----------------------|-------------------|
| Temperature          | 28°C              |
| Relative Humidity    | 52%               |
| Atmospheric Pressure | 1028mbar          |
| Test date :          | November 28, 2015 |
| Tested By :          | Winnie Zhang      |


### Requirement(s):

| Spec                                                | Item                                                                                                                                                                                                                                                                     | Requirement                                                                                                                                                               | Applicable                          |
|-----------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------|
| §2.1051,<br>§22.917(a)&<br>§24.238(a)<br>§ 27.53(h) | a)                                                                                                                                                                                                                                                                       | The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB | <input checked="" type="checkbox"/> |
| Test Setup                                          |                                                                                                                                                                                                                                                                          |                                                                                                                                                                           |                                     |
| Test Procedure                                      | <ul style="list-style-type: none"> <li>- The EUT was connected to Spectrum Analyzer and Base Station via power divider.</li> <li>- The Band Edges of low and high channels for the highest RF powers were measured.</li> <li>- Setting RBW as roughly BW/100.</li> </ul> |                                                                                                                                                                           |                                     |
| Remark                                              |                                                                                                                                                                                                                                                                          |                                                                                                                                                                           |                                     |
| Result                                              | <input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail                                                                                                                                                                                                   |                                                                                                                                                                           |                                     |


Test Data     Yes                       N/A  
 Test Plot     Yes (See below)       N/A

**Test Plots**


**Cellular Band (Part 22H) result**

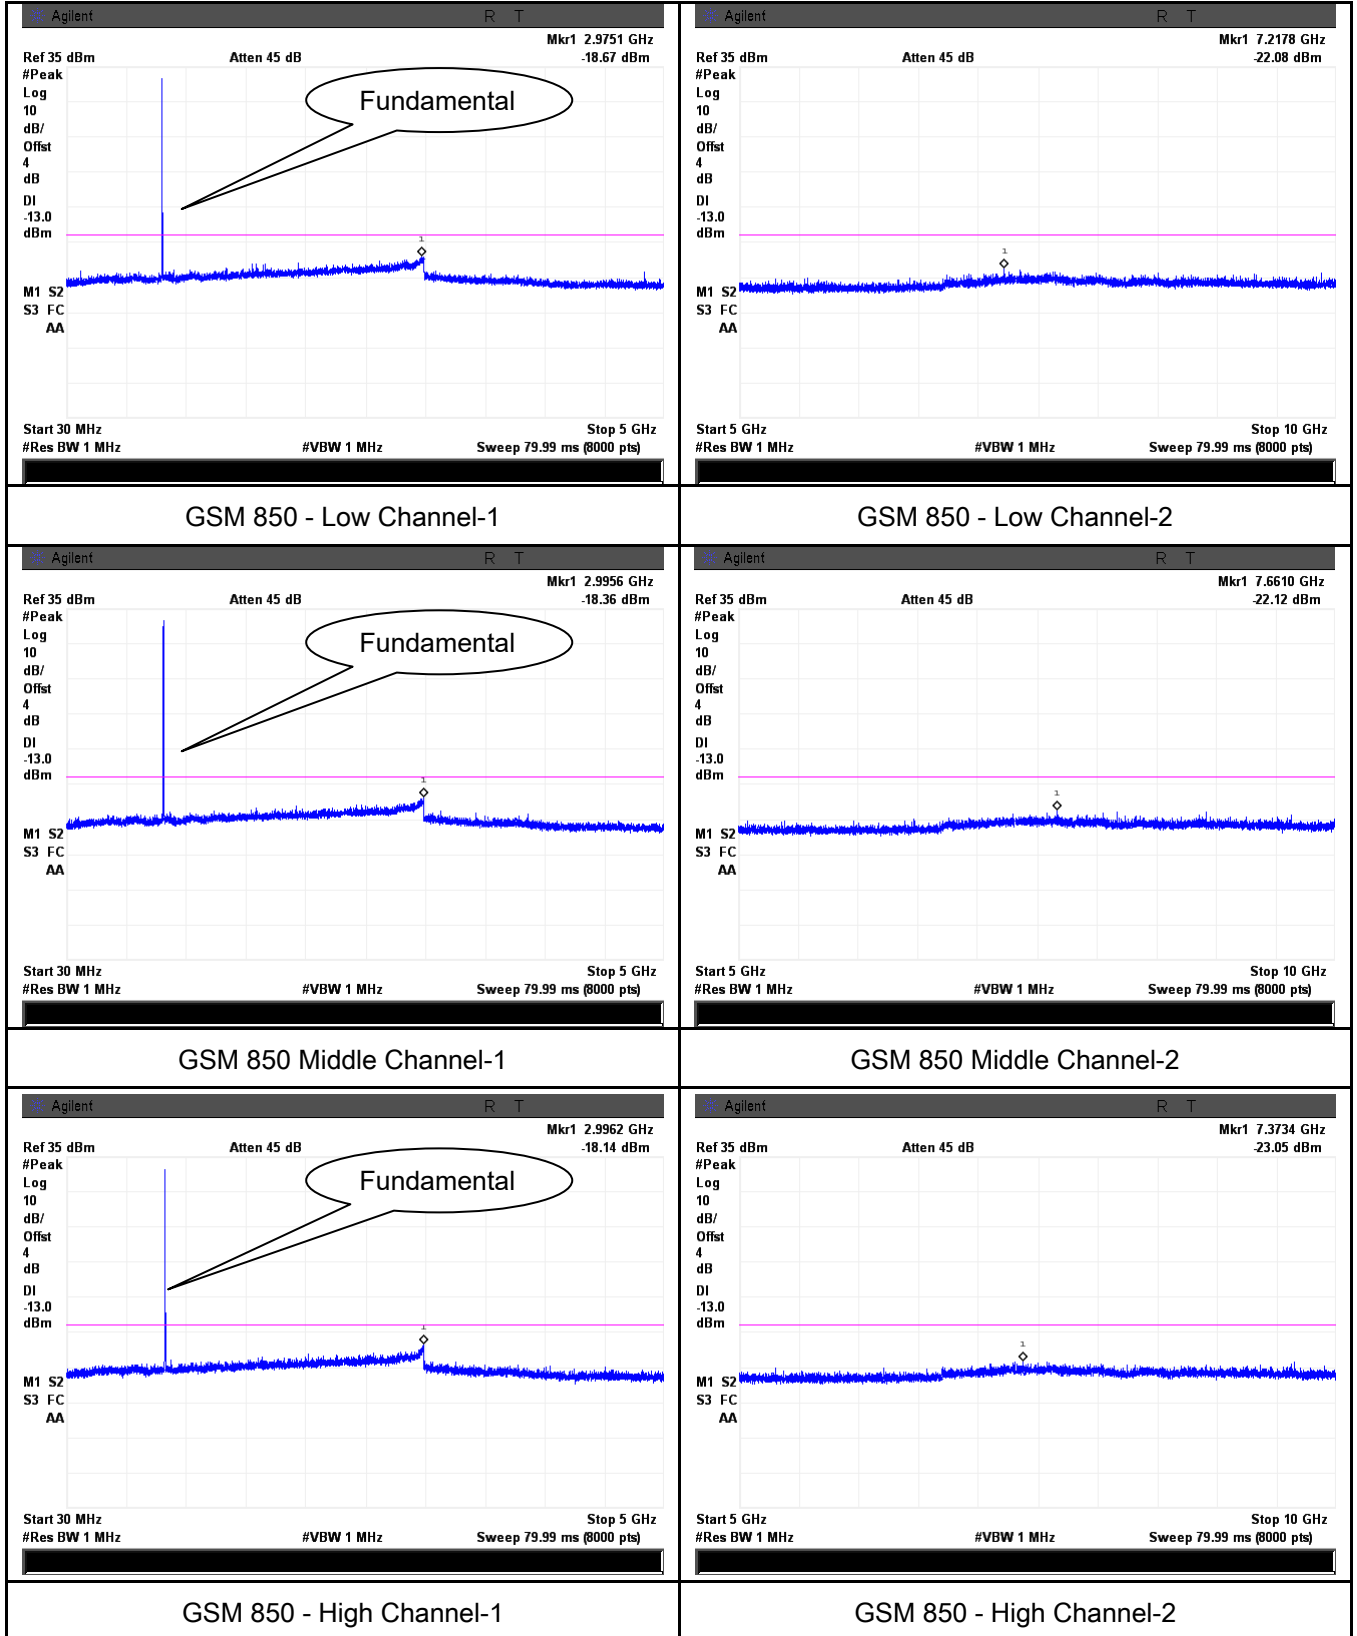


**PCS Band (Part24E) result**

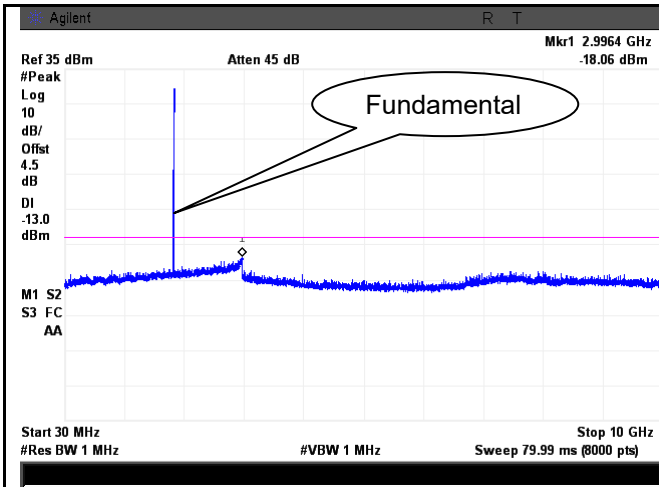


PCS1900 - Low Channel-1

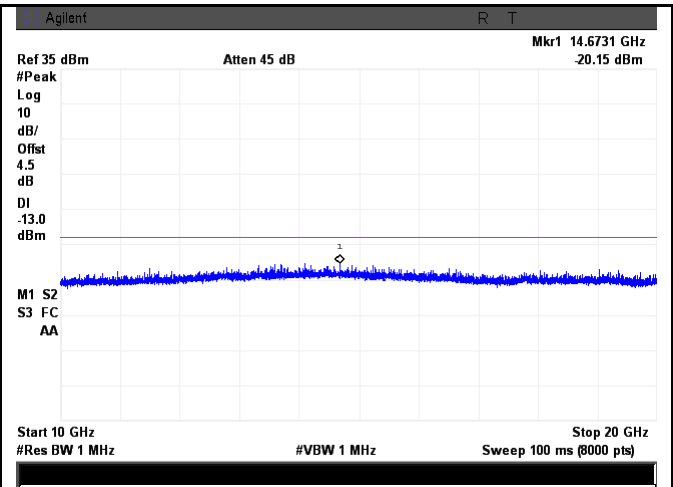


PCS 1900 - Low Channel-2

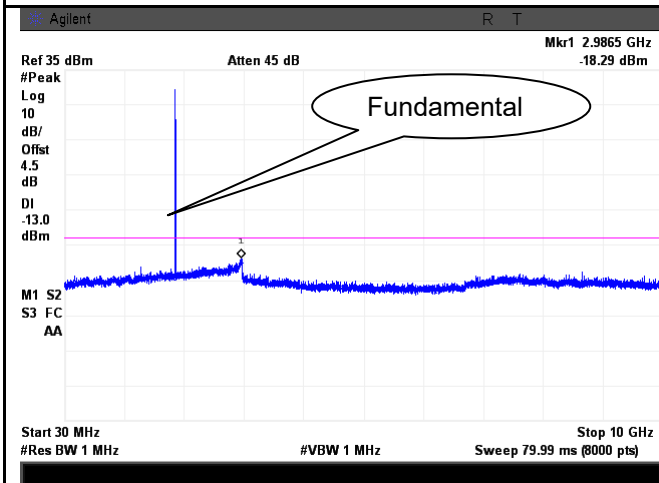


PCS1900 - Middle Channel-1

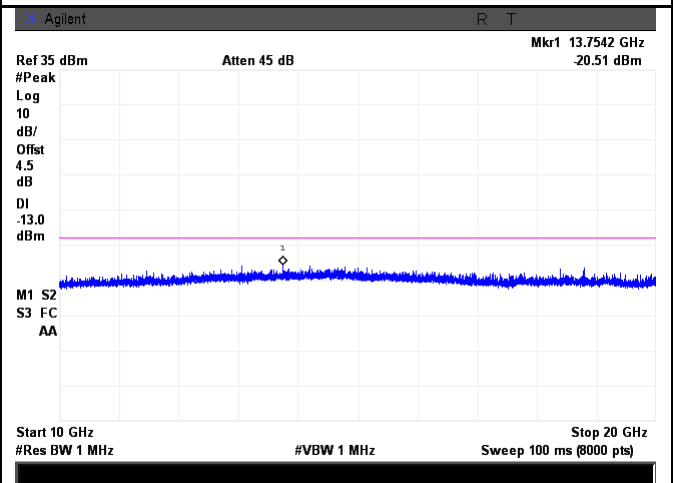

PCS 1900 - Middle Channel-2

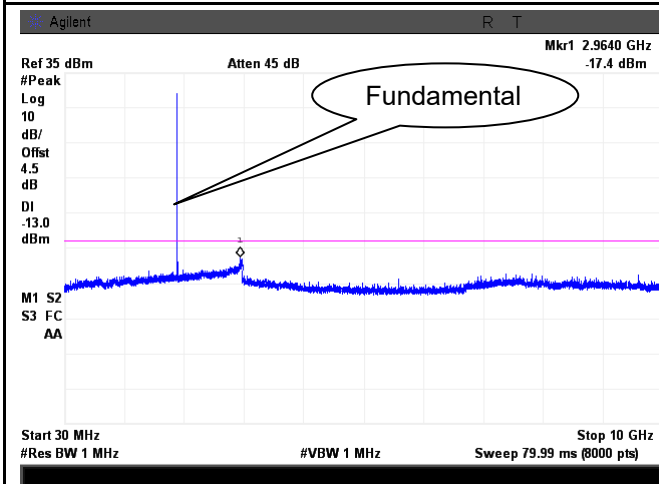


PCS1900 - High Channel-1

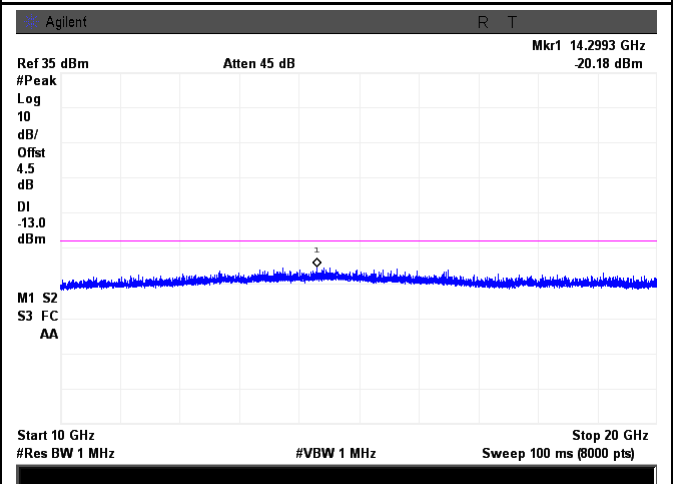


PCS 1900 - High Channel-2


**UMTS-FDD Band V (Part 22H)**

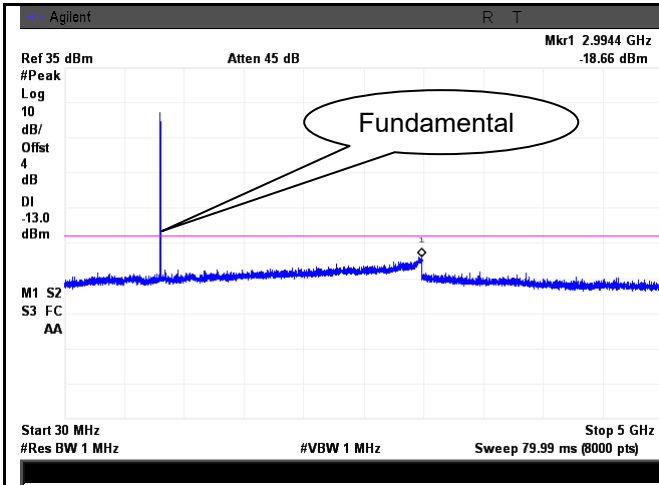


**Band V - Low Channel-1**

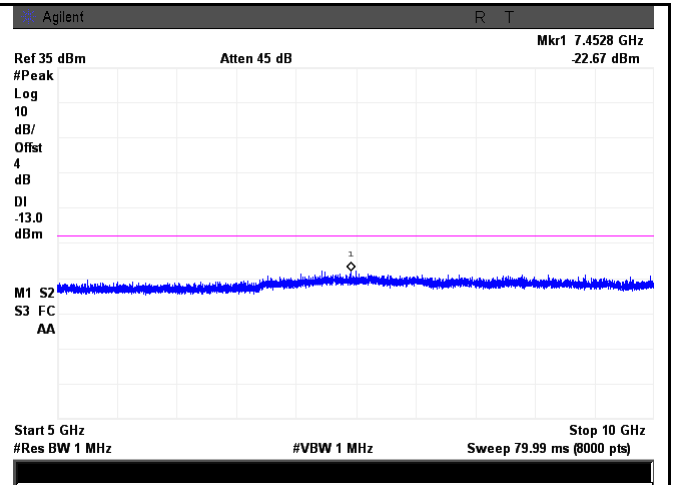


**Band V - Low Channel-2**

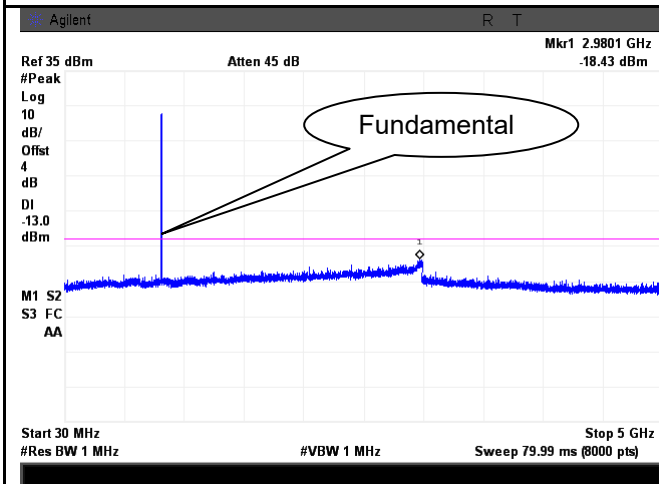


**Band V - Middle Channel-1**

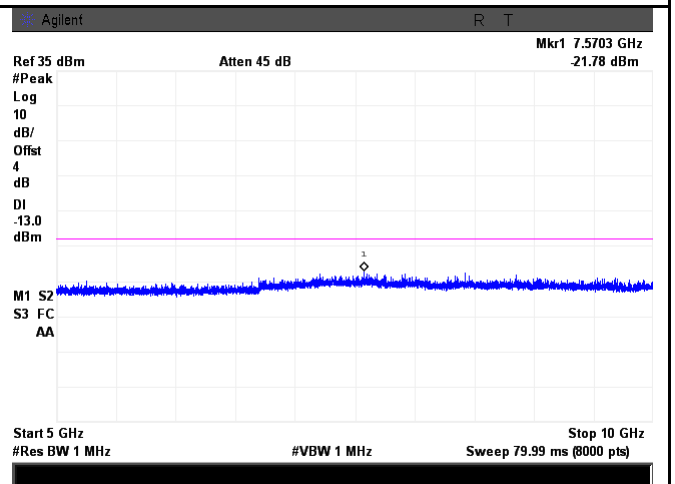

**Band V - Middle Channel-2**

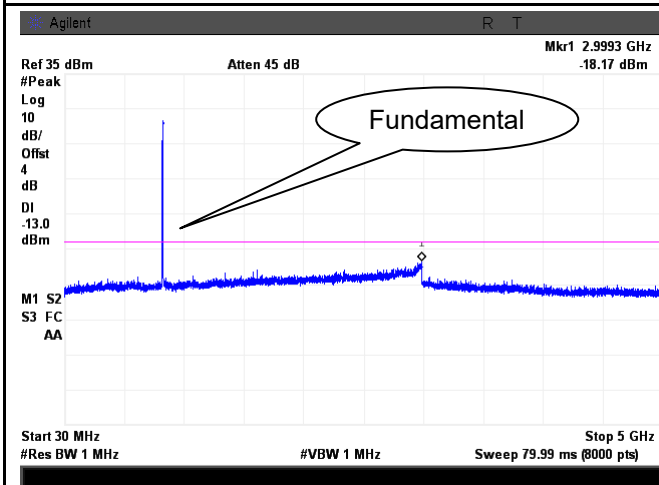


**Band V - High Channel-1**

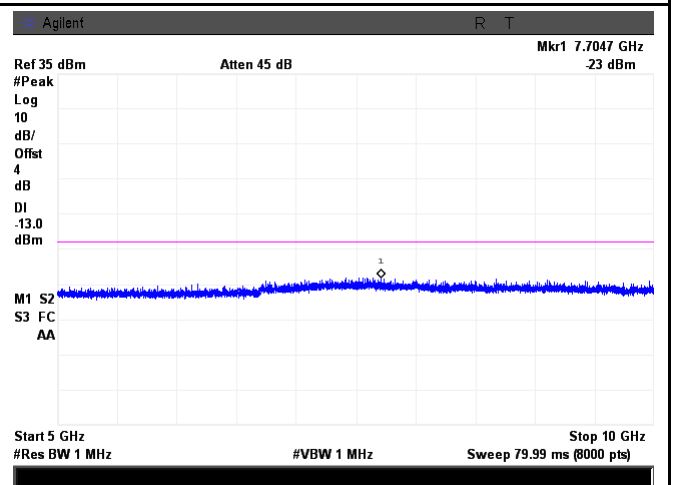


**Band V - High Channel-2**


**UMTS-FDD Band II (Part 24E)**

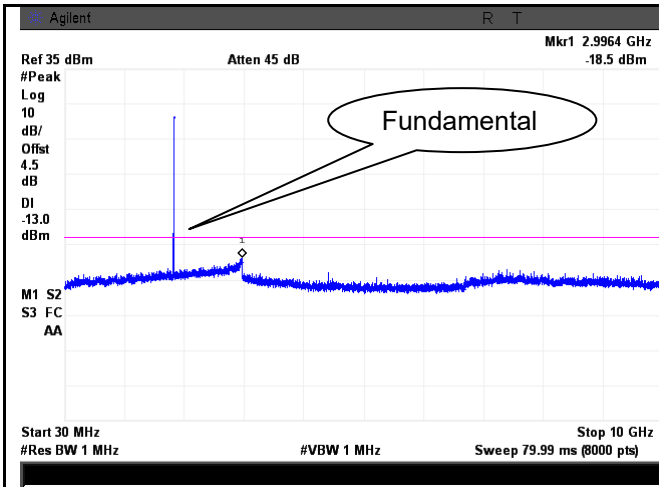


Band II - Low Channel-1

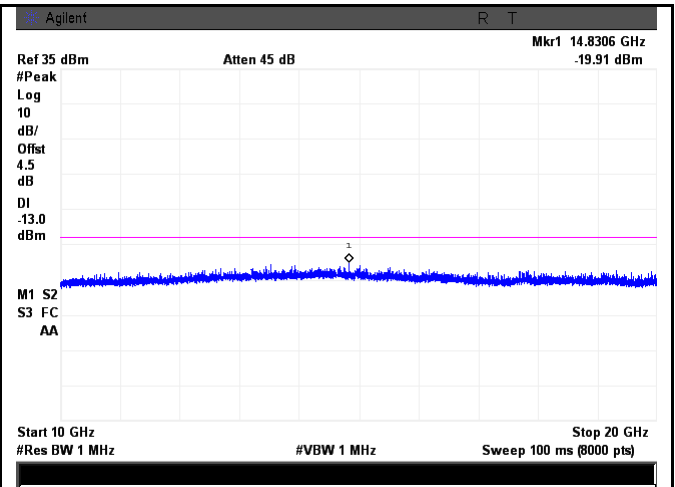


Band II - Low Channel-2

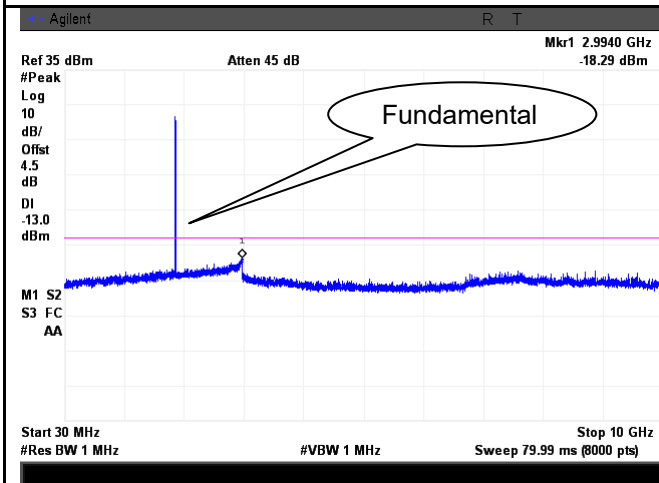


Band II - Middle Channel-1

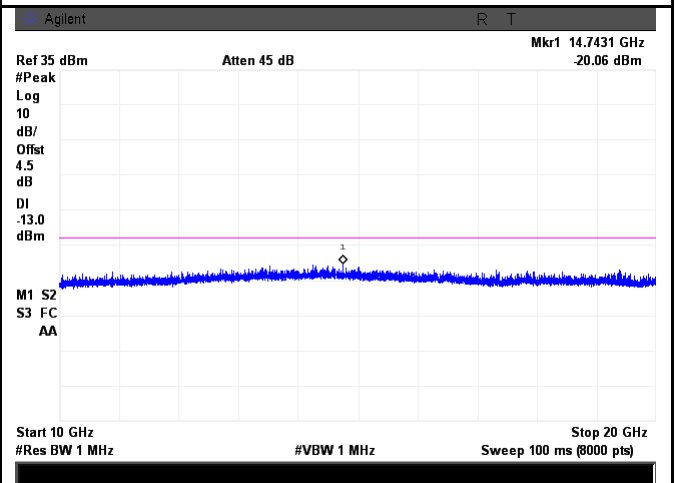

Band II - Middle Channel-2

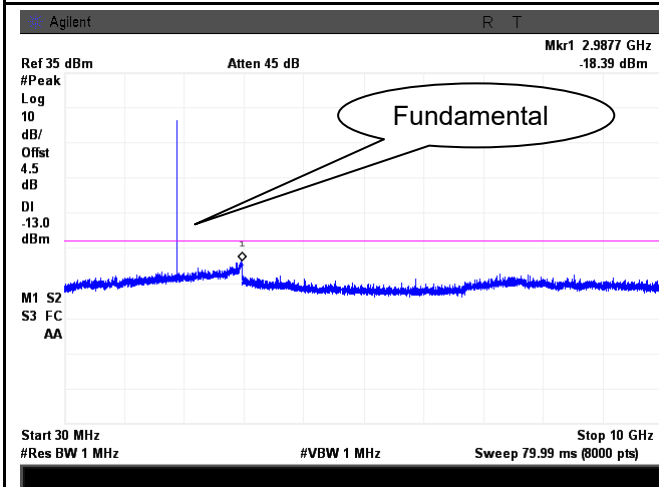


Band II - High Channel-1

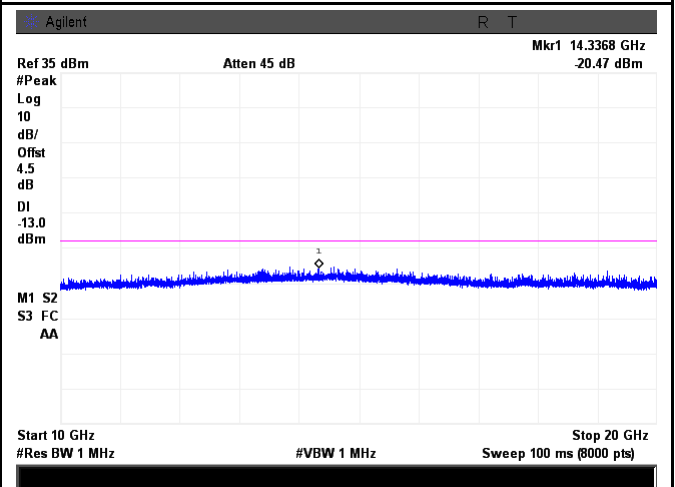


Band II - High Channel-2


**UMTS-FDD Band IV (Part 27)**

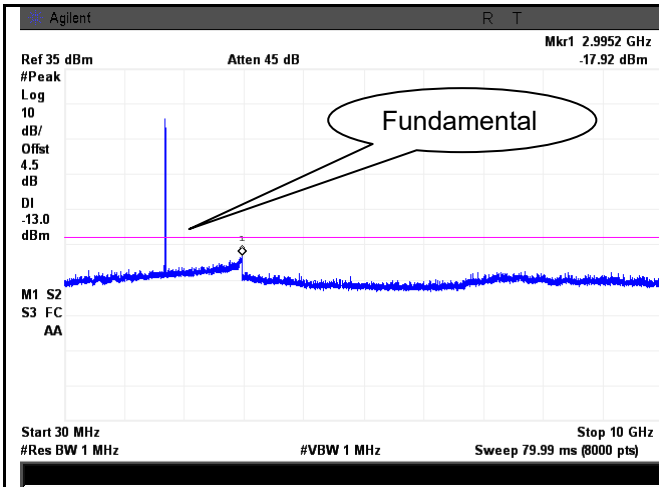


Band IV - Low Channel-1

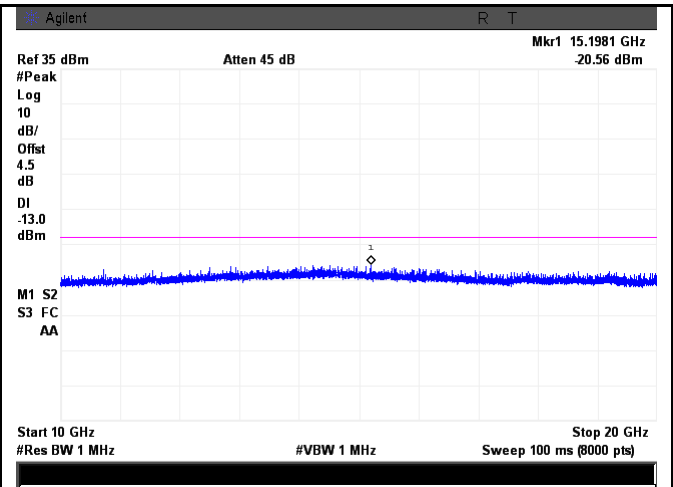


Band IV - Low Channel-2

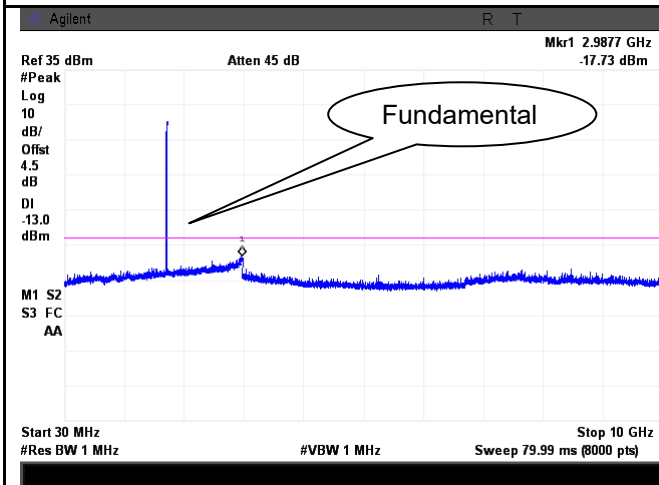


Band IV - Middle Channel-1

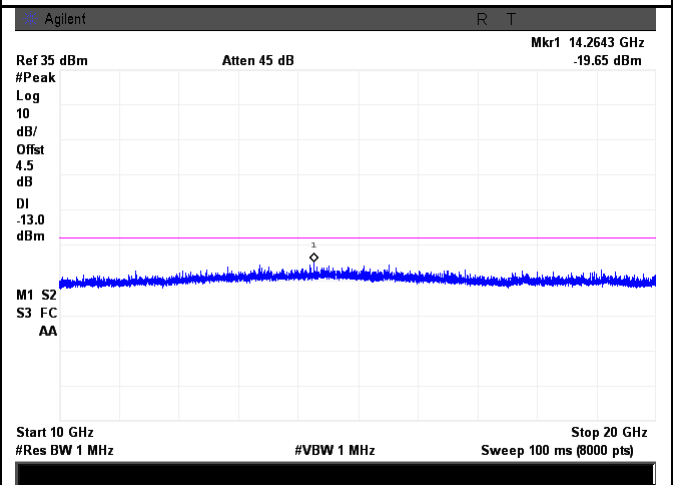

Band IV - Middle Channel-2

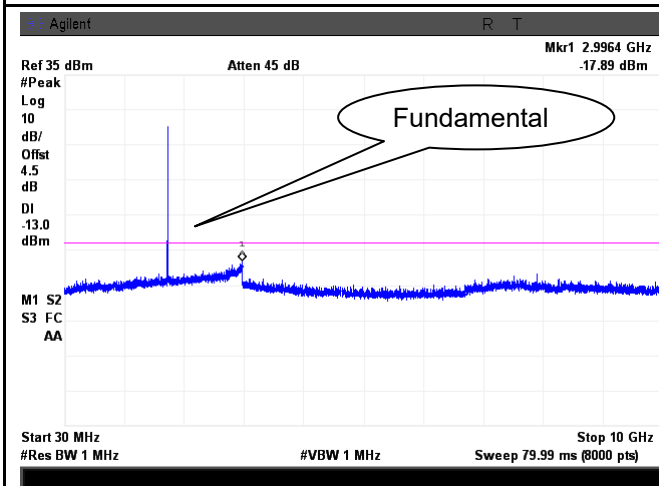

Band IV - High Channel-1

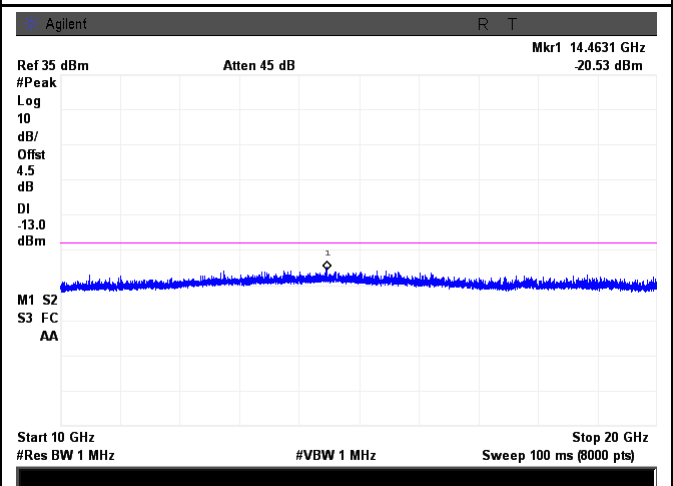

Band IV - High Channel-2

## 6.7 Spurious Radiated Emissions

|                      |                   |
|----------------------|-------------------|
| Temperature          | 28°C              |
| Relative Humidity    | 52%               |
| Atmospheric Pressure | 1028mbar          |
| Test date :          | November 28, 2015 |
| Tested By :          | Winnie Zhang      |

### Requirement(s):

| Spec                                           | Item | Requirement                                                                                                                                                                                                                                                         | Applicable                          |
|------------------------------------------------|------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------|
| §2.1053,<br>§22.917 &<br>§24.238<br>§ 27.53(h) | a)   | The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB. The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic. | <input checked="" type="checkbox"/> |

|            |                                                                                                                                                                                                                                                                                                                                                                        |
|------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Test setup | <p>The diagram illustrates the test setup. On the left, 'EUT &amp; Support Units' are placed on a 'Turn Table' which is 1.5m high. A horizontal distance of 3m separates the turntable from an 'Ant. Tower'. The antenna tower has a '1-4m Variable' height section. A 'Test Receiver' is connected to the antenna tower. The entire setup is on a 'Ground Plane'.</p> |
|------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

|                |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
|----------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Test Procedure | <ol style="list-style-type: none"> <li>The transmitter was placed on a wooden turntable, and it was transmitting into a non-radiating load which was also placed on the turntable.</li> <li>The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis.</li> <li>Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the spurious emissions were measured by the substitution.</li> </ol> <p>Sample Calculation:</p> <p>EUT Field Strength = Raw Amplitude (dBµV/m) – Amplifier Gain (dB) + Antenna Factor (dB) + Cable Loss (dB) + Filter Attenuation (dB, if used)</p> |
|----------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

|        |  |
|--------|--|
| Remark |  |
|--------|--|



|        |                                          |                               |
|--------|------------------------------------------|-------------------------------|
| Result | <input checked="" type="checkbox"/> Pass | <input type="checkbox"/> Fail |
|--------|------------------------------------------|-------------------------------|

Test Data  Yes  N/A

Test Plot  Yes (See below)  N/A

### Cellular Band (Part 22H) result

#### Low channel

| Frequency (MHz) | Substituted level (dBm) | Polarity (H/V) | Antenna Gain Correction (dB) | Cable Loss (dB) | Corrected Reading (dBm) | Limit (dBm) | Margin (dB) |
|-----------------|-------------------------|----------------|------------------------------|-----------------|-------------------------|-------------|-------------|
| 1648.4          | -44.55                  | V              | 7.95                         | 0.78            | -37.38                  | -13         | -24.38      |
| 1648.4          | -45.31                  | H              | 7.95                         | 0.78            | -38.14                  | -13         | -25.14      |
| 356.14          | -50.21                  | V              | 6.5                          | 0.3             | -44.01                  | -13         | -31.01      |
| 788.15          | -51.18                  | H              | 6.9                          | 0.44            | -44.72                  | -13         | -31.72      |

#### Middle channel

| Frequency (MHz) | Substituted level (dBm) | Polarity (H/V) | Antenna Gain Correction (dB) | Cable Loss (dB) | Corrected Reading (dBm) | Limit (dBm) | Margin (dB) |
|-----------------|-------------------------|----------------|------------------------------|-----------------|-------------------------|-------------|-------------|
| 1673.2          | -44.54                  | V              | 7.95                         | 0.78            | -37.37                  | -13         | -24.37      |
| 1673.2          | -45.22                  | H              | 7.95                         | 0.78            | -38.05                  | -13         | -25.05      |
| 390.12          | -50.19                  | V              | 6.5                          | 0.3             | -43.99                  | -13         | -30.99      |
| 794.15          | -51.44                  | H              | 6.9                          | 0.44            | -44.98                  | -13         | -31.98      |

#### High channel

| Frequency (MHz) | Substituted level (dBm) | Polarity (H/V) | Antenna Gain Correction (dB) | Cable Loss (dB) | Corrected Reading (dBm) | Limit (dBm) | Margin (dB) |
|-----------------|-------------------------|----------------|------------------------------|-----------------|-------------------------|-------------|-------------|
| 1697.6          | -44.66                  | V              | 7.95                         | 0.78            | -37.49                  | -13         | -24.49      |
| 1697.6          | -45.55                  | H              | 7.95                         | 0.78            | -38.38                  | -13         | -25.38      |
| 391.12          | -50.22                  | V              | 6.5                          | 0.3             | -44.02                  | -13         | -31.02      |
| 795.14          | -51.19                  | H              | 6.9                          | 0.44            | -44.73                  | -13         | -31.73      |

## PCS Band (Part24E) result

### Low channel

| Frequency (MHz) | Substituted level (dBm) | Polarity (H/V) | Antenna Gain Correction (dB) | Cable Loss (dB) | Corrected Reading (dBm) | Limit (dBm) | Margin (dB) |
|-----------------|-------------------------|----------------|------------------------------|-----------------|-------------------------|-------------|-------------|
| 3700.4          | -47.33                  | V              | 10.25                        | 2.73            | -39.81                  | -13         | -26.81      |
| 3700.4          | -48.45                  | H              | 10.25                        | 2.73            | -40.93                  | -13         | -27.93      |
| 387.45          | -53.12                  | V              | 6.5                          | 0.3             | -46.92                  | -13         | -33.92      |
| 795.14          | -53.44                  | H              | 6.9                          | 0.44            | -46.98                  | -13         | -33.98      |

### Middle channel

| Frequency (MHz) | Substituted level (dBm) | Polarity (H/V) | Antenna Gain Correction (dB) | Cable Loss (dB) | Corrected Reading (dBm) | Limit (dBm) | Margin (dB) |
|-----------------|-------------------------|----------------|------------------------------|-----------------|-------------------------|-------------|-------------|
| 3760            | -47.24                  | V              | 10.25                        | 2.73            | -39.72                  | -13         | -26.72      |
| 3760            | -48.45                  | H              | 10.25                        | 2.73            | -40.93                  | -13         | -27.93      |
| 388.45          | -54.21                  | V              | 6.5                          | 0.3             | -48.01                  | -13         | -35.01      |
| 796.12          | -54.44                  | H              | 6.9                          | 0.44            | -47.98                  | -13         | -34.98      |

### High channel

| Frequency (MHz) | Substituted level (dBm) | Polarity (H/V) | Antenna Gain Correction (dB) | Cable Loss (dB) | Corrected Reading (dBm) | Limit (dBm) | Margin (dB) |
|-----------------|-------------------------|----------------|------------------------------|-----------------|-------------------------|-------------|-------------|
| 3819.6          | -47.22                  | V              | 10.36                        | 2.73            | -39.59                  | -13         | -26.59      |
| 3819.6          | -48.41                  | H              | 10.36                        | 2.73            | -40.78                  | -13         | -27.78      |
| 389.24          | -53.64                  | V              | 6.5                          | 0.3             | -47.44                  | -13         | -34.44      |
| 796.15          | -53.24                  | H              | 6.9                          | 0.44            | -46.78                  | -13         | -33.78      |

### UMTS-FDD Band V (Part 22H)

#### Low channel

| Frequency (MHz) | Substituted level (dBm) | Polarity (H/V) | Antenna Gain Correction (dB) | Cable Loss (dB) | Corrected Reading (dBm) | Limit (dBm) | Margin (dB) |
|-----------------|-------------------------|----------------|------------------------------|-----------------|-------------------------|-------------|-------------|
| 1652.8          | -46.24                  | V              | 7.95                         | 0.78            | -39.07                  | -13         | -26.07      |
| 1652.8          | -46.56                  | H              | 7.95                         | 0.78            | -39.39                  | -13         | -26.39      |
| 395.45          | -52.33                  | V              | 6.5                          | 0.3             | -46.13                  | -13         | -33.13      |
| 798.12          | -52.45                  | H              | 6.9                          | 0.44            | -45.99                  | -13         | -32.99      |

#### Middle channel

| Frequency (MHz) | Substituted level (dBm) | Polarity (H/V) | Antenna Gain Correction (dB) | Cable Loss (dB) | Corrected Reading (dBm) | Limit (dBm) | Margin (dB) |
|-----------------|-------------------------|----------------|------------------------------|-----------------|-------------------------|-------------|-------------|
| 1670            | -46.45                  | V              | 7.95                         | 0.78            | -39.28                  | -13         | -26.28      |
| 1670            | -46.87                  | H              | 7.95                         | 0.78            | -39.7                   | -13         | -26.7       |
| 395.14          | -53.44                  | V              | 6.5                          | 0.3             | -47.24                  | -13         | -34.24      |
| 796.12          | -54.12                  | H              | 6.9                          | 0.44            | -47.66                  | -13         | -34.66      |

#### High channel

| Frequency (MHz) | Substituted level (dBm) | Polarity (H/V) | Antenna Gain Correction (dB) | Cable Loss (dB) | Corrected Reading (dBm) | Limit (dBm) | Margin (dB) |
|-----------------|-------------------------|----------------|------------------------------|-----------------|-------------------------|-------------|-------------|
| 1693.2          | -47.12                  | V              | 7.95                         | 0.78            | -39.95                  | -13         | -26.95      |
| 1693.2          | -47.24                  | H              | 7.95                         | 0.78            | -40.07                  | -13         | -27.07      |
| 388.15          | -53.46                  | V              | 6.5                          | 0.3             | -47.26                  | -13         | -34.26      |
| 795.12          | -54.12                  | H              | 6.9                          | 0.44            | -47.66                  | -13         | -34.66      |

## UMTS-FDD Band II (Part 24E)

### Low channel

| Frequency (MHz) | Substituted level (dBm) | Polarity (H/V) | Antenna Gain Correction (dB) | Cable Loss (dB) | Corrected Reading (dBm) | Limit (dBm) | Margin (dB) |
|-----------------|-------------------------|----------------|------------------------------|-----------------|-------------------------|-------------|-------------|
| 3704.8          | -48.14                  | V              | 10.25                        | 2.73            | -40.62                  | -13         | -27.62      |
| 3704.8          | -48.54                  | H              | 10.25                        | 2.73            | -41.02                  | -13         | -28.02      |
| 389.52          | -50.11                  | V              | 6.5                          | 0.3             | -43.91                  | -13         | -30.91      |
| 796.45          | -51.24                  | H              | 6.9                          | 0.44            | -44.78                  | -13         | -31.78      |

### Middle channel

| Frequency (MHz) | Substituted level (dBm) | Polarity (H/V) | Antenna Gain Correction (dB) | Cable Loss (dB) | Corrected Reading (dBm) | Limit (dBm) | Margin (dB) |
|-----------------|-------------------------|----------------|------------------------------|-----------------|-------------------------|-------------|-------------|
| 3760            | -50.12                  | V              | 10.25                        | 2.73            | -42.6                   | -13         | -29.6       |
| 3760            | -50.21                  | H              | 10.25                        | 2.73            | -42.69                  | -13         | -29.69      |
| 384.21          | -52.45                  | V              | 6.5                          | 0.3             | -46.25                  | -13         | -33.25      |
| 795.45          | -53.21                  | H              | 6.9                          | 0.44            | -46.75                  | -13         | -33.75      |

### High channel

| Frequency (MHz) | Substituted level (dBm) | Polarity (H/V) | Antenna Gain Correction (dB) | Cable Loss (dB) | Corrected Reading (dBm) | Limit (dBm) | Margin (dB) |
|-----------------|-------------------------|----------------|------------------------------|-----------------|-------------------------|-------------|-------------|
| 3815.2          | -51.24                  | V              | 10.36                        | 2.73            | -43.61                  | -13         | -30.61      |
| 3815.2          | -51.13                  | H              | 10.36                        | 2.73            | -43.5                   | -13         | -30.5       |
| 389.45          | -52.47                  | V              | 6.5                          | 0.3             | -46.27                  | -13         | -33.27      |
| 789.45          | -52.49                  | H              | 6.9                          | 0.44            | -46.03                  | -13         | -33.03      |

### UMTS-FDD Band IV (Part 27)

#### Low channel

| Frequency (MHz) | Substituted level (dBm) | Polarity (H/V) | Antenna Gain Correction (dB) | Cable Loss (dB) | Corrected Reading (dBm) | Limit (dBm) | Margin (dB) |
|-----------------|-------------------------|----------------|------------------------------|-----------------|-------------------------|-------------|-------------|
| 3424.8          | -43.45                  | V              | 10.07                        | 2.52            | -35.9                   | -13         | -22.9       |
| 3424.8          | -44.52                  | H              | 10.07                        | 2.52            | -36.97                  | -13         | -23.97      |
| 376.45          | -51.22                  | V              | 6.4                          | 0.26            | -45.08                  | -13         | -32.08      |
| 677.13          | -51.48                  | H              | 7.1                          | 0.42            | -44.8                   | -13         | -31.8       |

#### Middle channel

| Frequency (MHz) | Substituted level (dBm) | Polarity (H/V) | Antenna Gain Correction (dB) | Cable Loss (dB) | Corrected Reading (dBm) | Limit (dBm) | Margin (dB) |
|-----------------|-------------------------|----------------|------------------------------|-----------------|-------------------------|-------------|-------------|
| 3480            | -42.13                  | V              | 10.09                        | 2.52            | -34.56                  | -13         | -21.56      |
| 3480            | -43.21                  | H              | 10.09                        | 2.52            | -35.64                  | -13         | -22.64      |
| 388.12          | -51.42                  | V              | 6.4                          | 0.26            | -45.28                  | -13         | -32.28      |
| 686.45          | -51.68                  | H              | 7.1                          | 0.42            | -45                     | -13         | -32         |


#### High channel

| Frequency (MHz) | Substituted level (dBm) | Polarity (H/V) | Antenna Gain Correction (dB) | Cable Loss (dB) | Corrected Reading (dBm) | Limit (dBm) | Margin (dB) |
|-----------------|-------------------------|----------------|------------------------------|-----------------|-------------------------|-------------|-------------|
| 3505.2          | -43.21                  | V              | 10.09                        | 2.52            | -35.64                  | -13         | -22.64      |
| 3505.2          | -42.66                  | H              | 10.09                        | 2.52            | -35.09                  | -13         | -22.09      |
| 379.48          | -51.23                  | V              | 6.4                          | 0.26            | -45.09                  | -13         | -32.09      |
| 690.12          | -52.34                  | H              | 7.1                          | 0.42            | -45.66                  | -13         | -32.66      |

## 6.8 Band Edge

|                      |                   |
|----------------------|-------------------|
| Temperature          | 28°C              |
| Relative Humidity    | 52%               |
| Atmospheric Pressure | 1028mbar          |
| Test date :          | November 28, 2015 |
| Tested By :          | Winnie Zhang      |

### Requirement(s):

| Spec                                   | Item                                                                                                                                                                                                                                                          | Requirement                                                                                                                                                                | Applicable                          |
|----------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------|
| §22.917(a)<br>§24.238(a)<br>§ 27.53(h) | a)                                                                                                                                                                                                                                                            | The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB. | <input checked="" type="checkbox"/> |
| Test setup                             |                                                                                                                                                                           |                                                                                                                                                                            |                                     |
| Procedure                              | <ul style="list-style-type: none"> <li>- The EUT was connected to Spectrum Analyzer and Base Station via power divider.</li> <li>- The Band Edges of low and high channels for the highest RF powers were measured. Setting RBW as roughly BW/100.</li> </ul> |                                                                                                                                                                            |                                     |
| Remark                                 |                                                                                                                                                                                                                                                               |                                                                                                                                                                            |                                     |
| Result                                 | <input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail                                                                                                                                                                                        |                                                                                                                                                                            |                                     |

Test Data     Yes                       N/A

Test Plot      Yes (See below)             N/A

### Cellular Band (Part 22H) result

| Frequency (MHz) | Emission (dBm) | Limit (dBm) |
|-----------------|----------------|-------------|
| 823.9800        | -13.94         | -13         |
| 849.0175        | -13.97         | -13         |

### PCS Band (Part24E) result

| Frequency (MHz) | Emission (dBm) | Limit (dBm) |
|-----------------|----------------|-------------|
| 1849.9950       | -15.71         | -13         |
| 1910.0150       | -15.22         | -13         |

### UMTS-FDD Band V (Part 22H)

| Frequency (MHz) | Emission (dBm) | Limit (dBm) |
|-----------------|----------------|-------------|
| 823.9250        | -21.76         | -13         |
| 849.0250        | -23.29         | -13         |


### UMTS-FDD Band IV (Part 27)

| Frequency (MHz) | Emission (dBm) | Limit (dBm) |
|-----------------|----------------|-------------|
| 1709.950        | -28.31         | -13         |
| 1755.350        | -24.97         | -13         |

### UMTS-FDD Band II (Part 24E)


| Frequency (MHz) | Emission (dBm) | Limit (dBm) |
|-----------------|----------------|-------------|
| 1849.775        | -23.94         | -13         |
| 1910.025        | -25.43         | -13         |

**Test Plots**

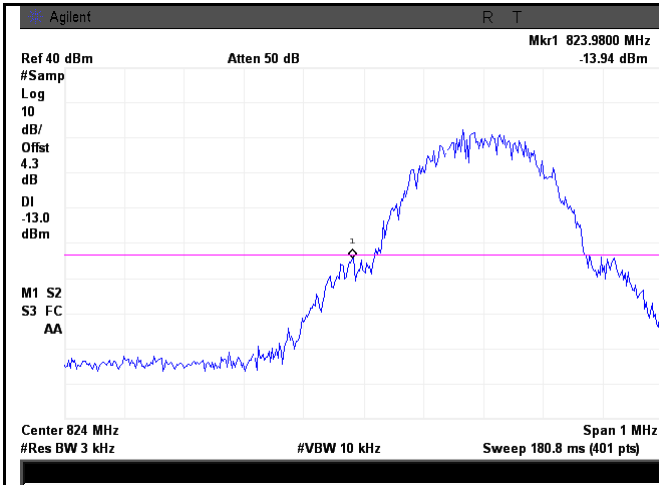


Cellular Band - Low Channel

Note: Offset=Cable loss (4.0) + 10log  
(3.19/3)=4.0+0.3=4.3 dB

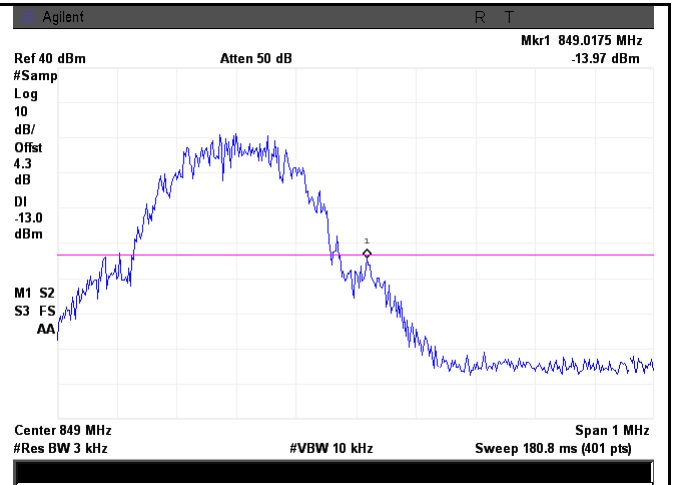


Cellular Band - High Channel

Note: Offset=Cable loss (4.0) + 10log  
(3.21/3)=4.0+0.3=4.3 dB

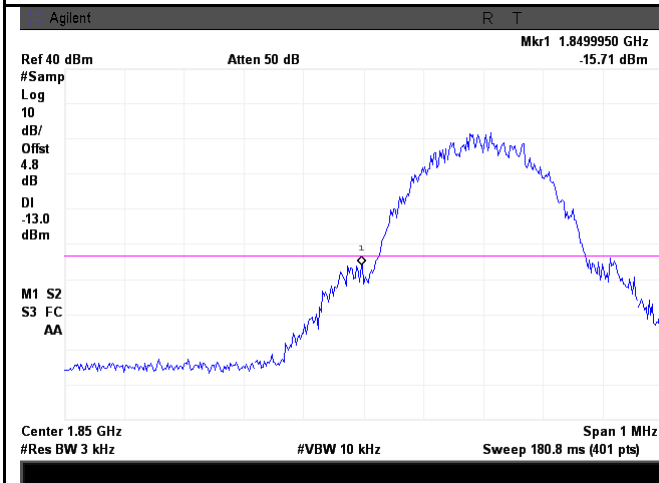

PCS Band - Low Channel


Note: Offset=Cable loss (4.5) + 10log  
(3.19/3)=4.5+0.3=4.8 dB

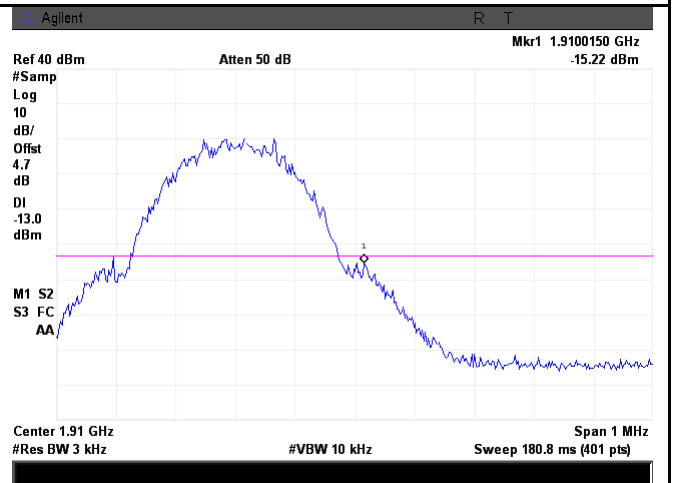

PCS Band - High Channel


Note: Offset=Cable loss (4.5) + 10log  
(3.16/3)=4.5+0.2=4.7 dB



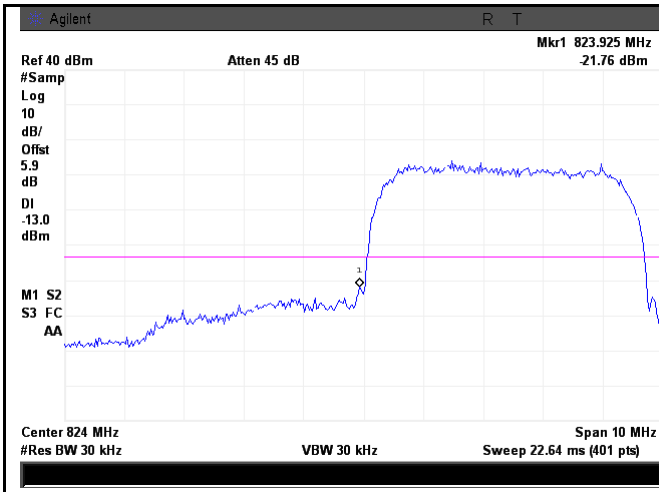


UMTS-FDD Band V - Low Channel

Note: Offset=Cable loss (4.0) + 10log  
 (46.63/30)=4.0+1.9=5.9 dB

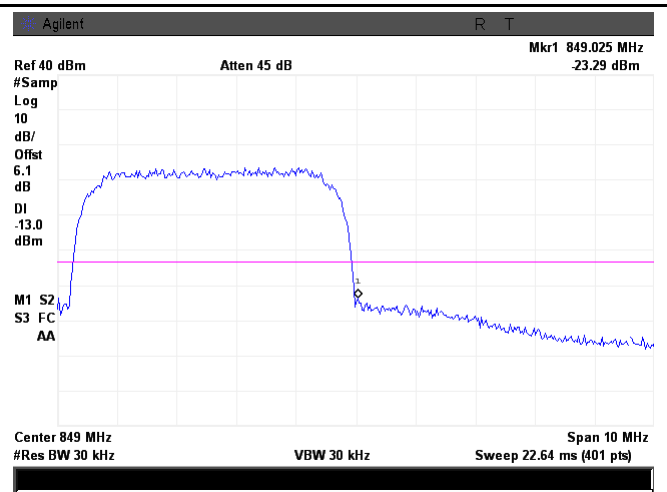


UMTS-FDD Band V - High Channel

Note: Offset=Cable loss (4.0) + 10log  
 (48.77/30)=4.0+2.1=6.1 dB

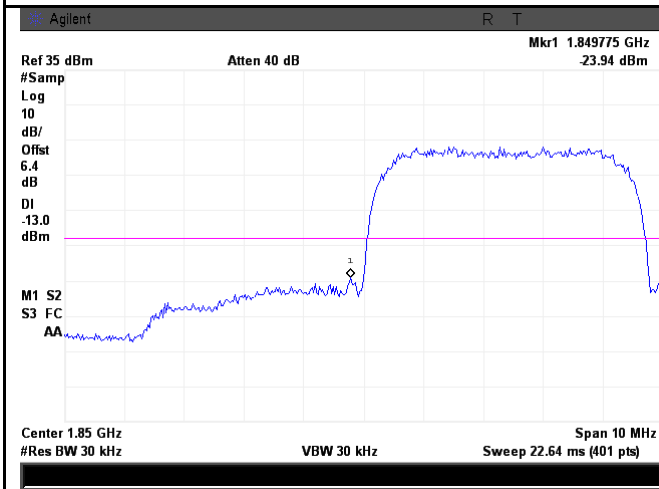


UMTS-FDD Band II - Low Channel

Note: Offset=Cable loss (4.5) + 10log  
 (47/30)=4.5+1.9=6.4 dB

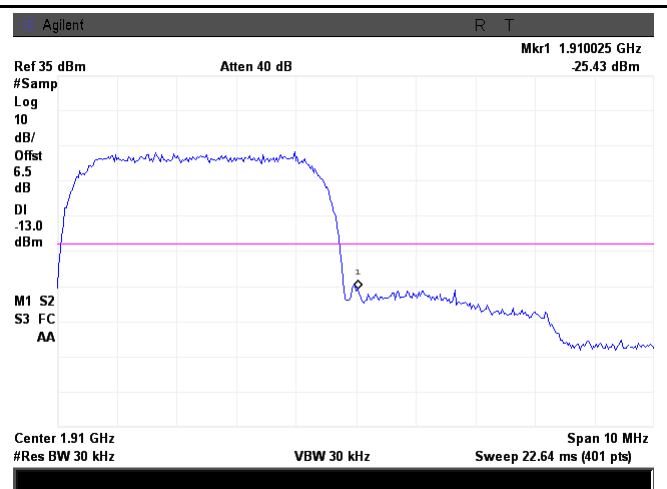


UMTS-FDD Band II - High Channel

Note: Offset=Cable loss (4.5) + 10log  
 (47.17/30)=4.5+2.0=6.5 dB

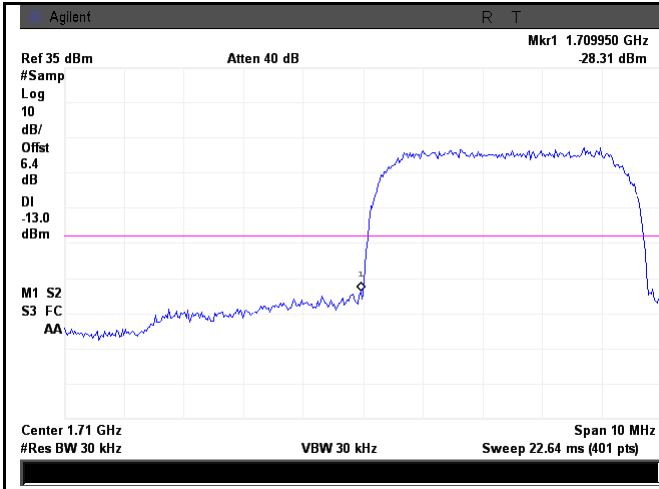

UMTS-FDD Band IV - Low Channel

Note: Offset=Cable loss (4.5) + 10log  
 (46.78/30)=4.5+1.9=6.4 dB

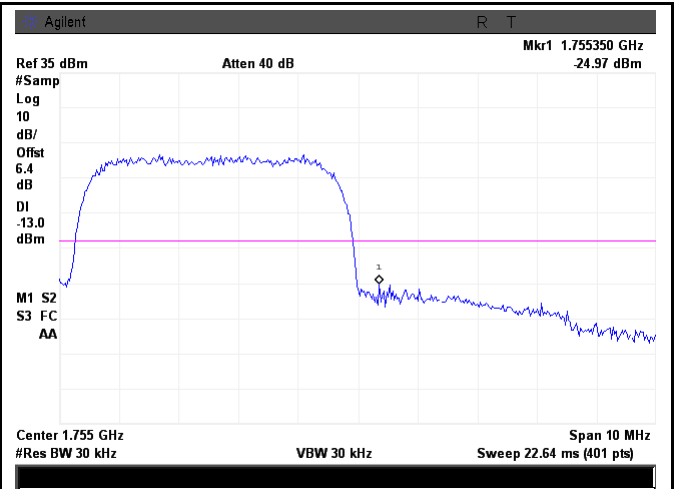


UMTS-FDD Band IV - High Channel

Note: Offset=Cable loss (4.5) + 10log  
 (46.91/30)=4.5+1.9=6.4 dB

## 6.9 Frequency Stability

|                      |                   |
|----------------------|-------------------|
| Temperature          | 28°C              |
| Relative Humidity    | 52%               |
| Atmospheric Pressure | 1028mbar          |
| Test date :          | November 28, 2015 |
| Tested By :          | Winnie Zhang      |

### Requirement(s):
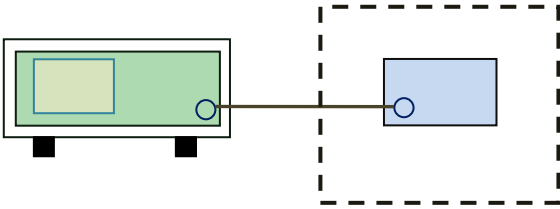
| Spec                                                                                                                                                   | Item | Requirement                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | Applicable                          |                       |                        |                        |                        |          |      |      |      |          |     |     |      |            |     |     |     |            |     |     |     |            |     |     |     |             |     |     |     |              |      |     |     |
|--------------------------------------------------------------------------------------------------------------------------------------------------------|------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------|-----------------------|------------------------|------------------------|------------------------|----------|------|------|------|----------|-----|-----|------|------------|-----|-----|-----|------------|-----|-----|-----|------------|-----|-----|-----|-------------|-----|-----|-----|--------------|------|-----|-----|
| §2.1055,<br>§22.355 &<br>§24.235<br>§ 27.5(h);<br>§ 27.54                                                                                              | a)   | According to §22.355, the carrier frequency of each transmitter in the Public Mobile Services must be maintained within the tolerances given in Table below:<br><br>Frequency Tolerance for Transmitters in the Public Mobile Services                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | <input checked="" type="checkbox"/> |                       |                        |                        |                        |          |      |      |      |          |     |     |      |            |     |     |     |            |     |     |     |            |     |     |     |             |     |     |     |              |      |     |     |
|                                                                                                                                                        |      | <table border="1"> <thead> <tr> <th>Frequency Range (MHz)</th> <th>Base, fixed (ppm)</th> <th>Mobile ≤ 3 watts (ppm)</th> <th>Mobile ≤ 3 watts (ppm)</th> </tr> </thead> <tbody> <tr> <td>25 to 50</td> <td>20.0</td> <td>20.0</td> <td>50.0</td> </tr> <tr> <td>5 to 450</td> <td>5.0</td> <td>5.0</td> <td>50.0</td> </tr> <tr> <td>450 to 512</td> <td>2.5</td> <td>5.0</td> <td>5.0</td> </tr> <tr> <td>821 to 896</td> <td>1.5</td> <td>2.5</td> <td>2.5</td> </tr> <tr> <td>928 to 29.</td> <td>5.0</td> <td>N/A</td> <td>N/A</td> </tr> <tr> <td>929 to 960.</td> <td>1.5</td> <td>N/A</td> <td>N/A</td> </tr> <tr> <td>2110 to 2220</td> <td>10.0</td> <td>N/A</td> <td>N/A</td> </tr> </tbody> </table> |                                     | Frequency Range (MHz) | Base, fixed (ppm)      | Mobile ≤ 3 watts (ppm) | Mobile ≤ 3 watts (ppm) | 25 to 50 | 20.0 | 20.0 | 50.0 | 5 to 450 | 5.0 | 5.0 | 50.0 | 450 to 512 | 2.5 | 5.0 | 5.0 | 821 to 896 | 1.5 | 2.5 | 2.5 | 928 to 29. | 5.0 | N/A | N/A | 929 to 960. | 1.5 | N/A | N/A | 2110 to 2220 | 10.0 | N/A | N/A |
|                                                                                                                                                        |      | Frequency Range (MHz)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |                                     | Base, fixed (ppm)     | Mobile ≤ 3 watts (ppm) | Mobile ≤ 3 watts (ppm) |                        |          |      |      |      |          |     |     |      |            |     |     |     |            |     |     |     |            |     |     |     |             |     |     |     |              |      |     |     |
|                                                                                                                                                        |      | 25 to 50                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |                                     | 20.0                  | 20.0                   | 50.0                   |                        |          |      |      |      |          |     |     |      |            |     |     |     |            |     |     |     |            |     |     |     |             |     |     |     |              |      |     |     |
|                                                                                                                                                        |      | 5 to 450                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |                                     | 5.0                   | 5.0                    | 50.0                   |                        |          |      |      |      |          |     |     |      |            |     |     |     |            |     |     |     |            |     |     |     |             |     |     |     |              |      |     |     |
|                                                                                                                                                        |      | 450 to 512                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |                                     | 2.5                   | 5.0                    | 5.0                    |                        |          |      |      |      |          |     |     |      |            |     |     |     |            |     |     |     |            |     |     |     |             |     |     |     |              |      |     |     |
|                                                                                                                                                        |      | 821 to 896                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |                                     | 1.5                   | 2.5                    | 2.5                    |                        |          |      |      |      |          |     |     |      |            |     |     |     |            |     |     |     |            |     |     |     |             |     |     |     |              |      |     |     |
|                                                                                                                                                        |      | 928 to 29.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |                                     | 5.0                   | N/A                    | N/A                    |                        |          |      |      |      |          |     |     |      |            |     |     |     |            |     |     |     |            |     |     |     |             |     |     |     |              |      |     |     |
| 929 to 960.                                                                                                                                            | 1.5  | N/A                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | N/A                                 |                       |                        |                        |                        |          |      |      |      |          |     |     |      |            |     |     |     |            |     |     |     |            |     |     |     |             |     |     |     |              |      |     |     |
| 2110 to 2220                                                                                                                                           | 10.0 | N/A                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | N/A                                 |                       |                        |                        |                        |          |      |      |      |          |     |     |      |            |     |     |     |            |     |     |     |            |     |     |     |             |     |     |     |              |      |     |     |
| According to §24.235, the frequency stability shall be sufficient to ensure that the fundamental emissions stay within the authorized frequency block. |      |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                                     |                       |                        |                        |                        |          |      |      |      |          |     |     |      |            |     |     |     |            |     |     |     |            |     |     |     |             |     |     |     |              |      |     |     |
|                                                                    |      |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                                     |                       |                        |                        |                        |          |      |      |      |          |     |     |      |            |     |     |     |            |     |     |     |            |     |     |     |             |     |     |     |              |      |     |     |
| Test setup                                                                                                                                             |      |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                                     |                       |                        |                        |                        |          |      |      |      |          |     |     |      |            |     |     |     |            |     |     |     |            |     |     |     |             |     |     |     |              |      |     |     |

|             |                 |
|-------------|-----------------|
| Test Report | 15071187-FCC-R1 |
| Page        | 44 of 58        |

|           |                                                                                                                                                                                                                                                                                                                                                                        |
|-----------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Procedure | A communication link was established between EUT and base station. The frequency error was monitored and measured by base station under variation of ambient temperature and variation of primary supply voltage.<br><br>Limit: The frequency stability of the transmitter shall be maintained within $\pm 0.00025\%$ ( $\pm 2.5\text{ppm}$ ) of the center frequency. |
| Remark    |                                                                                                                                                                                                                                                                                                                                                                        |
| Result    | <input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail                                                                                                                                                                                                                                                                                                 |

Test Data     Yes                       N/A

Test Plot     Yes (See below)             N/A

### Cellular Band (Part 22H) result

| Middle Channel, $f_0 = 836.6$ MHz |                                   |                      |                       |             |
|-----------------------------------|-----------------------------------|----------------------|-----------------------|-------------|
| Temperature (°C)                  | Power Supplied (V <sub>DC</sub> ) | Frequency Error (Hz) | Frequency Error (ppm) | Limit (ppm) |
| -10                               | 3.7                               | 19                   | 0.0227                | 2.5         |
| 0                                 |                                   | 17                   | 0.0203                | 2.5         |
| 10                                |                                   | 20                   | 0.0239                | 2.5         |
| 20                                |                                   | 14                   | 0.0167                | 2.5         |
| 30                                |                                   | 16                   | 0.0191                | 2.5         |
| 40                                |                                   | 18                   | 0.0215                | 2.5         |
| 50                                |                                   | 23                   | 0.0275                | 2.5         |
| 55                                |                                   | 29                   | 0.0347                | 2.5         |
| 25                                | 4.2                               | 23                   | 0.0275                | 2.5         |
|                                   | 3.5                               | 25                   | 0.0299                | 2.5         |

### PCS Band (Part 24E) result

| Middle Channel, $f_0 = 1880$ MHz |                                   |                      |                       |             |
|----------------------------------|-----------------------------------|----------------------|-----------------------|-------------|
| Temperature (°C)                 | Power Supplied (V <sub>DC</sub> ) | Frequency Error (Hz) | Frequency Error (ppm) | Limit (ppm) |
| -10                              | 3.7                               | 29                   | 0.0154                | 2.5         |
| 0                                |                                   | 25                   | 0.0133                | 2.5         |
| 10                               |                                   | 27                   | 0.0144                | 2.5         |
| 20                               |                                   | 18                   | 0.0096                | 2.5         |
| 30                               |                                   | 15                   | 0.0080                | 2.5         |
| 40                               |                                   | 12                   | 0.0064                | 2.5         |
| 50                               |                                   | 20                   | 0.0106                | 2.5         |
| 55                               |                                   | 16                   | 0.0085                | 2.5         |
| 25                               | 4.2                               | 22                   | 0.0117                | 2.5         |
|                                  | 3.5                               | 26                   | 0.0138                | 2.5         |

### UMTS-FDD Band V (Part 22H)

| Middle Channel, $f_0 = 835$ MHz |                                   |                      |                       |             |
|---------------------------------|-----------------------------------|----------------------|-----------------------|-------------|
| Temperature (°C)                | Power Supplied (V <sub>DC</sub> ) | Frequency Error (Hz) | Frequency Error (ppm) | Limit (ppm) |
| -10                             | 3.7                               | 15                   | 0.0180                | 2.5         |
| 0                               |                                   | 12                   | 0.0144                | 2.5         |
| 10                              |                                   | 17                   | 0.0204                | 2.5         |
| 20                              |                                   | 14                   | 0.0168                | 2.5         |
| 30                              |                                   | 16                   | 0.0192                | 2.5         |
| 40                              |                                   | 19                   | 0.0228                | 2.5         |
| 50                              |                                   | 10                   | 0.0120                | 2.5         |
| 55                              |                                   | 21                   | 0.0251                | 2.5         |
| 25                              | 4.2                               | 17                   | 0.0204                | 2.5         |
|                                 | 3.5                               | 19                   | 0.0228                | 2.5         |

### UMTS-FDD Band II (Part 24E)

| Middle Channel, $f_0 = 1880$ MHz |                                   |                      |                       |             |
|----------------------------------|-----------------------------------|----------------------|-----------------------|-------------|
| Temperature (°C)                 | Power Supplied (V <sub>DC</sub> ) | Frequency Error (Hz) | Frequency Error (ppm) | Limit (ppm) |
| -10                              | 3.7                               | 14                   | 0.0074                | 2.5         |
| 0                                |                                   | 10                   | 0.0053                | 2.5         |
| 10                               |                                   | 9                    | 0.0048                | 2.5         |
| 20                               |                                   | 5                    | 0.0027                | 2.5         |
| 30                               |                                   | 7                    | 0.0037                | 2.5         |
| 40                               |                                   | 8                    | 0.0043                | 2.5         |
| 50                               |                                   | 12                   | 0.0064                | 2.5         |
| 55                               |                                   | 19                   | 0.0101                | 2.5         |
| 25                               | 4.2                               | 10                   | 0.0053                | 2.5         |
|                                  | 3.5                               | 11                   | 0.0059                | 2.5         |

**UMTS-FDD Band IV (Part 27)**

| Middle Channel, $f_0 = 1732.6$ MHz |                                   |                      |                       |             |
|------------------------------------|-----------------------------------|----------------------|-----------------------|-------------|
| Temperature (°C)                   | Power Supplied (V <sub>DC</sub> ) | Frequency Error (Hz) | Frequency Error (ppm) | Limit (ppm) |
| -10                                | 3.7                               | 8                    | 0.0043                | 2.5         |
| 0                                  |                                   | 9                    | 0.0048                | 2.5         |
| 10                                 |                                   | 7                    | 0.0037                | 2.5         |
| 20                                 |                                   | 5                    | 0.0027                | 2.5         |
| 30                                 |                                   | 3                    | 0.0016                | 2.5         |
| 40                                 |                                   | 7                    | 0.0037                | 2.5         |
| 50                                 |                                   | 6                    | 0.0032                | 2.5         |
| 55                                 |                                   | 11                   | 0.0059                | 2.5         |
| 25                                 |                                   | 4.2                  | 10                    | 0.0053      |
|                                    | 3.5                               | 12                   | 0.0064                | 2.5         |

## Annex A. TEST INSTRUMENT

| Instrument                             | Model           | Serial #   | Cal Date   | Cal Due    | In use                              |
|----------------------------------------|-----------------|------------|------------|------------|-------------------------------------|
| <b>RF Conducted Test</b>               |                 |            |            |            |                                     |
| Agilent ESA-E SERIES SPECTRUM ANALYZER | E4407B          | MY45108319 | 09/16/2015 | 09/15/2016 | <input checked="" type="checkbox"/> |
| Power Splitter                         | 1#              | 1#         | 09/01/2015 | 08/31/2016 | <input checked="" type="checkbox"/> |
| Universal Radio Communication Tester   | CMU200          | 121393     | 09/25/2015 | 09/24/2016 | <input checked="" type="checkbox"/> |
| Temperature/Humidity Chamber           | UHL-270         | 001        | 10/09/2015 | 10/08/2016 | <input checked="" type="checkbox"/> |
| DC Power Supply                        | E3640A          | MY40004013 | 09/17/2015 | 09/16/2016 | <input checked="" type="checkbox"/> |
| <b>Radiated Emissions</b>              |                 |            |            |            |                                     |
| EMI test receiver                      | ESL6            | 100262     | 09/17/2015 | 09/16/2016 | <input checked="" type="checkbox"/> |
| OPT 010 AMPLIFIER (0.1-1300MHz)        | 8447E           | 2727A02430 | 09/01/2015 | 08/31/2016 | <input checked="" type="checkbox"/> |
| Microwave Preamplifier (1 ~ 26.5GHz)   | 8449B           | 3008A02402 | 03/25/2015 | 03/24/2016 | <input checked="" type="checkbox"/> |
| Bilog Antenna (30MHz~6GHz)             | JB6             | A110712    | 09/21/2015 | 09/20/2016 | <input checked="" type="checkbox"/> |
| Bilog Antenna (30MHz~2GHz)             | JB1             | A112017    | 09/21/2015 | 09/20/2016 | <input checked="" type="checkbox"/> |
| Double Ridge Horn Antenna (1 ~18GHz)   | AH-118          | 71259      | 09/24/2015 | 09/23/2016 | <input checked="" type="checkbox"/> |
| Double Ridge Horn Antenna (1 ~18GHz)   | AH-118          | 71283      | 09/24/2015 | 09/23/2016 | <input checked="" type="checkbox"/> |
| SYNTHESIZED SIGNAL GENERATOR           | 8665B           | 3744A01293 | 09/17/2015 | 09/16/2016 | <input checked="" type="checkbox"/> |
| Tunable Notch Filter                   | 3NF-800/1000-S  | AA4        | 09/01/2015 | 08/31/2016 | <input checked="" type="checkbox"/> |
| Tunable Notch Filter                   | 3NF-1000/2000-S | AM 4       | 09/01/2015 | 08/31/2016 | <input checked="" type="checkbox"/> |



**Annex B. EUT And Test Setup Photographs**

**Annex B.i. Photograph: EUT External Photo**



Whole Package View



Adapter - Front View



EUT - Front View



EUT - Rear View



EUT - Top View



EUT - Bottom View



EUT - Left View



EUT - Right View

**Annex B.ii. Photograph: EUT Internal Photo**




Cover Off - Top View 1




Cover Off - Top View 2




Battery - Front View

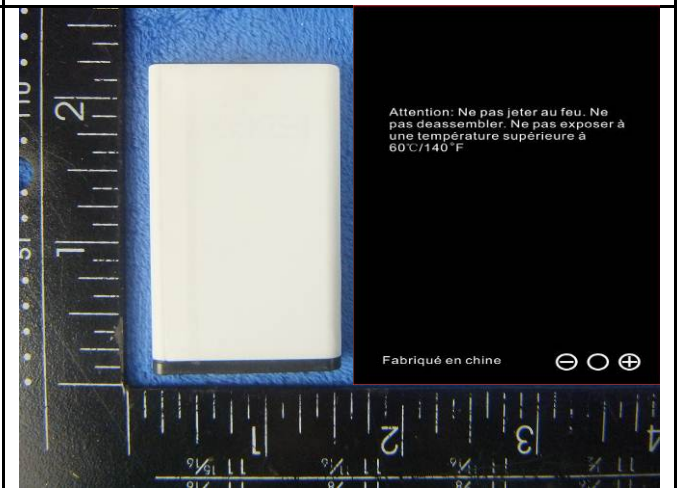


Battery - Rear View

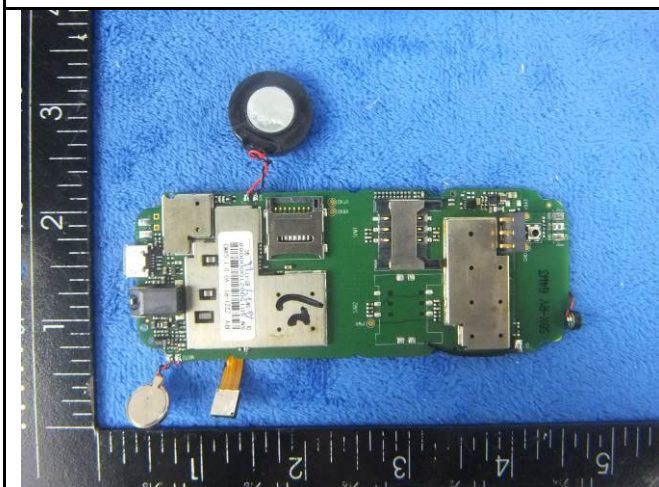


Mainboard with Shielding - Front View

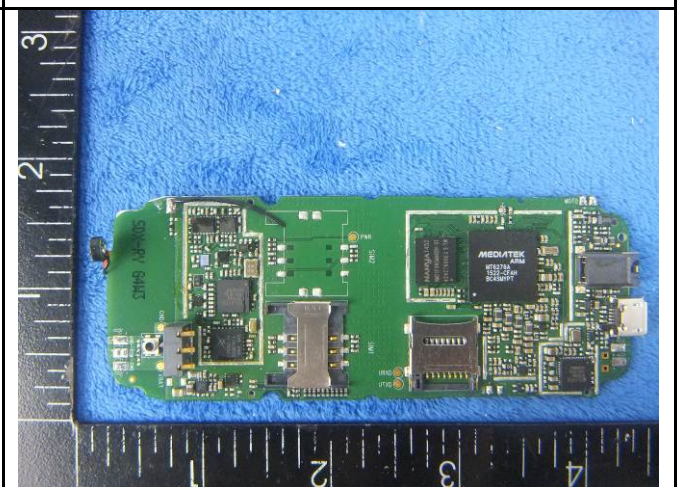


Mainboard without Shielding - Front View

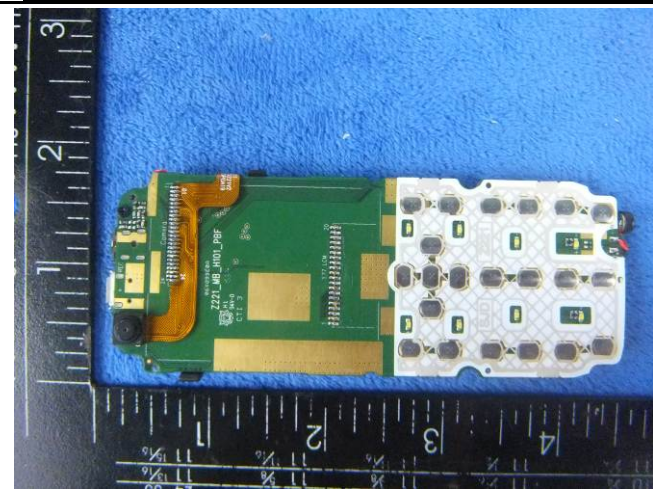

Mainboard – Rear View

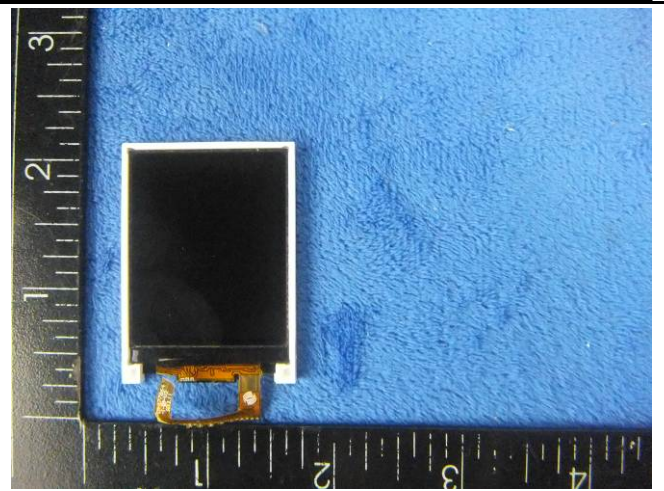


LCD – Front View

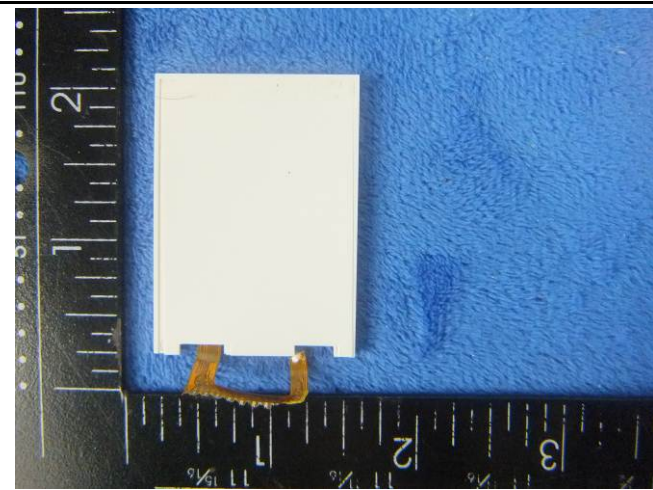

LCD – Rear View




GSM/PCS/UMTS-FDD Antenna View

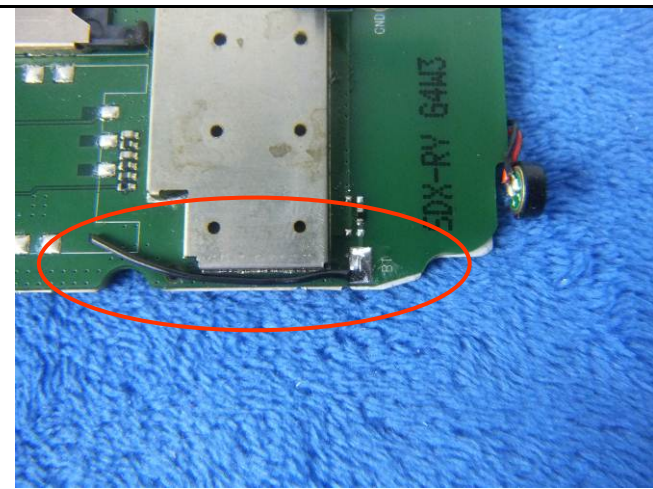


BT - Antenna View



**Annex B.iii. Photograph: Test Setup Photo**

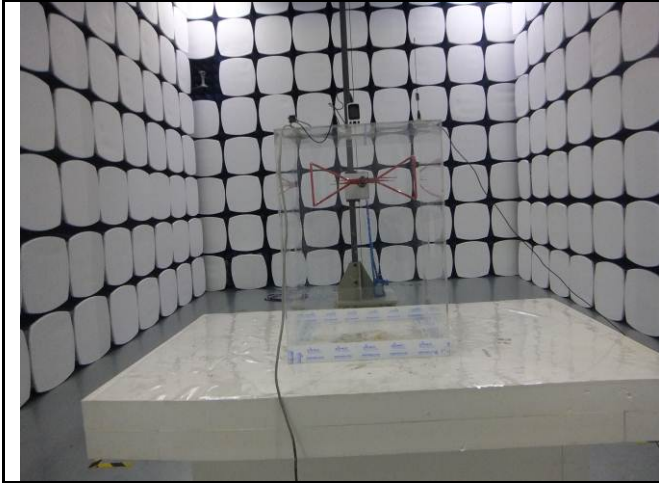

Radiated Spurious Emissions Test Setup Below 1GHz

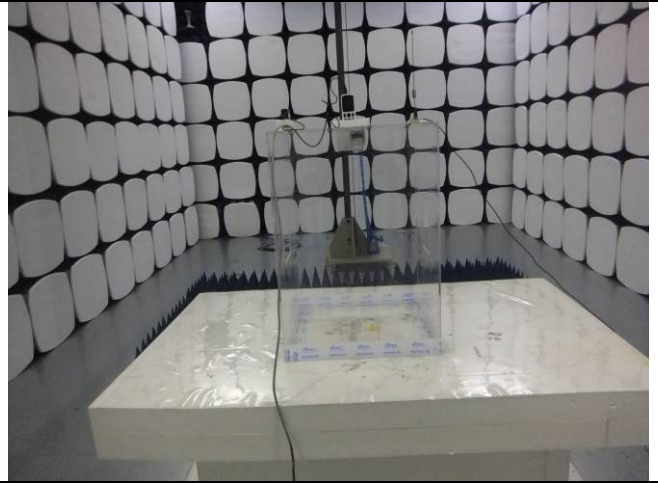


Radiated Spurious Emissions Test Setup Above  
1GHz

## Annex C. TEST SETUP AND SUPPORTING EQUIPMENT

### Annex C.ii. TEST SET UP BLOCK

#### Block Configuration Diagram for Radiated Emissions

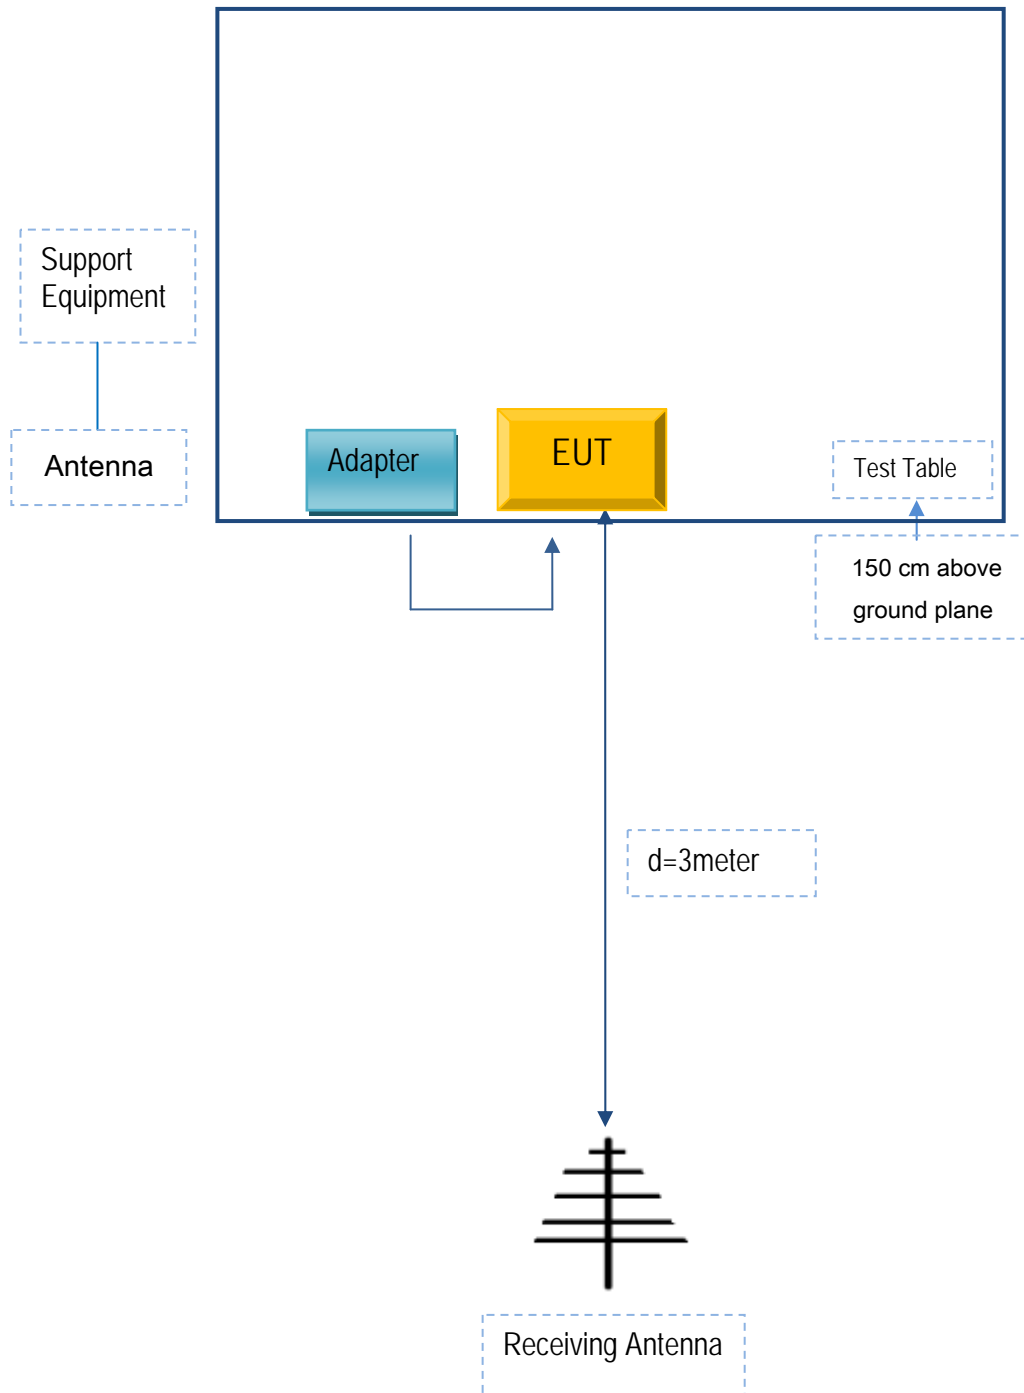

## Annex C. ii. SUPPORTING EQUIPMENT DESCRIPTION

The following is a description of supporting equipment and details of cables used with the EUT.

| Manufacturer             | Equipment Description | Model      | Serial No | Calibration Date | Calibration Due Date |
|--------------------------|-----------------------|------------|-----------|------------------|----------------------|
| Quality One Wireless LLC | Adapter               | JT-H050050 | HM554451  | N/A              | N/A                  |

### Supporting Cable:

| Cable type | Shield Type  | Ferrite Core | Length | Serial No | Calibration Date | Calibration Due Date |
|------------|--------------|--------------|--------|-----------|------------------|----------------------|
| USB Cable  | Un-shielding | No           | 0.8m   | HM542214  | N/A              | N/A                  |

|             |                 |
|-------------|-----------------|
| Test Report | 15071187-FCC-R1 |
| Page        | 56 of 58        |

## Annex C.ii. EUT OPERATING CONKITIONS

N/A



|             |                 |
|-------------|-----------------|
| Test Report | 15071187-FCC-R1 |
| Page        | 57 of 58        |

## Annex D. User Manual / Block Diagram / Schematics / Partlist

Please see attachment

|             |                 |
|-------------|-----------------|
| Test Report | 15071187-FCC-R1 |
| Page        | 58 of 58        |

## Annex E. DECLARATION OF SIMILARITY

N/A