


FCC SAR TEST REPORT

Application No.: KSEM2012001545CR
Applicant: Dspread Technology (Beijing) Inc
Address of Applicant: Rm.407, b12c. #10 (Universal Business Park), Jiuxianqiao Road, Chaoyang District, Beijing, China
Manufacturer: Dspread Technology (Beijing) Inc
Address of Manufacturer: Rm.407, b12c. #10 (Universal Business Park), Jiuxianqiao Road, Chaoyang District, Beijing, China
Factory: Sichuan DOOV PTY Co., Ltd.
Address of Factory: Duo Wei Yun Gu Industrial Demonstration Park, No.35, west section of Gangyuan Road, Guoxing Avenue, Lingang Economic Development Zone, Yibin City, Sichuan Province
Product Name: Smart PoS
Model No.(EUT): D20
Trade mark: Dspread
FCC ID: 2AGQ6-D20
Standard(s) : FCC 47CFR §2.1093
Date of Receipt: 2020-12-02
Date of Test: 2020-12-04 to 2020-12-17
Date of Issue: 2020-12-21

Test Result:	Pass*
---------------------	--------------

* In the configuration tested, the EUT complied with the standards specified above.



Eric Lin

Laboratory Manager

The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report.

If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of SGS International Electrical Approvals or testing done by SGS International Electrical Approvals in connection with, distribution or use of the product described in this report must be approved by SGS International Electrical Approvals in writing.





Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.
Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300
 中国·江苏·昆山市留学院创业园伟业路10号 邮编 215300

t(86-512)57355888 f(86-512)57370818 www.sgs.com
 t(86-512)57355888 f(86-512)57370818 sgs.china@sgs.com

REVISION HISTORY

Revision Record			
Version	Description	Date	Remark
00	Original	2020-12-21	Original

Authorized for issue by:				
				
		Richard.Kong/ Project Engineer		
				
		Eric.Lin/Reviewer		

TEST SUMMARY

Frequency Band	Maximum Reported SAR(W/kg)		
	Head	Body worn	Hotspot
GSM850	0.31	0.65	0.65
GSM1900	0.18	0.61	0.61
WCDMA Band II	0.18	0.60	0.60
WCDMA Band V	0.25	0.39	0.39
WCDMA Band IV	0.27	0.58	0.58
LTE Band 2	0.21	0.66	0.66
LTE Band 7	0.58	1.25	1.25
LTE Band 12	0.15	0.28	0.28
LTE Band 25	0.21	0.65	0.65
LTE Band 26	0.28	0.47	0.47
LTE Band 38	0.20	0.34	0.34
LTE Band 41	0.16	0.22	0.22
LTE Band 66	0.31	0.63	0.63
WI-FI (2.4GHz)	0.23	NA	0.13
WI-FI (5GHz)	0.18	0.08	0.14
Bluetooth	0.06	NA	0.03
SAR Limited(W/kg)	1.6	1.6	1.6
Maximum Simultaneous Transmission SAR (W/kg)			
Scenario	Head	Body worn	Hotspot
Sum SAR	0.81	1.39	1.39
SPLSR	N/A	N/A	N/A
SPLSR Limited	0.04	0.04	0.04

Note: According to TCB workshop October,2014 RF Exposure Procedures Update(Overlapping LTE Bands),SAR for LTE Band 4 (Frequency range:1710-1755 MHz) is covered by LTE Band 66 (Frequency range:1710-1780 MHz) , SAR for LTE Band 17 (Frequency range:704-716 MHz) is covered by LTE Band 12 (Frequency range:699-716 MHz) SAR for LTE Band 5 (Frequency range: 824-849 MHz) is covered by LTE Band 26 (Frequency range: 814-849 MHz), due to similar frequency range, same maximum tune up limit and same channel bandwidth.

CONTENTS

1	GENERAL INFORMATION	6
1.1	GENERAL DESCRIPTION OF EUT	6
1.1.1	<i>DUT Antenna Locations(Back View)</i>	<i>7</i>
1.2	TEST SPECIFICATION.....	8
1.3	RF EXPOSURE LIMITS	9
1.4	TEST LOCATION	10
1.5	TEST FACILITY	10
2	LABORATORY ENVIRONMENT	11
3	SAR MEASUREMENTS SYSTEM CONFIGURATION.....	12
3.1	THE SAR MEASUREMENT SYSTEM	12
3.2	ISOTROPIC E-FIELD PROBE EX3DV4	13
3.3	DATA ACQUISITION ELECTRONICS (DAE)	14
3.4	SAM TWIN PHANTOM.....	14
3.5	ELI PHANTOM.....	15
3.6	DEVICE HOLDER FOR TRANSMITTERS.....	16
3.7	MEASUREMENT PROCEDURE.....	17
3.7.1	<i>Scanning procedure</i>	<i>17</i>
3.7.2	<i>Data Storage</i>	<i>19</i>
3.7.3	<i>Data Evaluation by SEMCAD.....</i>	<i>19</i>
4	SAR MEASUREMENT VARIABILITY AND UNCERTAINTY	21
4.1	SAR MEASUREMENT VARIABILITY	21
4.2	SAR MEASUREMENT UNCERTAINTY	22
5	DESCRIPTION OF TEST POSITION	23
5.1	HEAD EXPOSURE CONDITION/ THE HEAD TEST POSITION	23
5.1.1	<i>SAM Phantom Shape</i>	<i>23</i>
5.1.2	<i>EUT constructions</i>	<i>24</i>
5.1.3	<i>Definition of the “cheek” position</i>	<i>24</i>
5.1.4	<i>Definition of the “tilted” position</i>	<i>24</i>
5.2	THE BODY TEST POSITION.....	26
5.2.1	<i>Wireless Router exposure conditions.....</i>	<i>27</i>
6	SAR SYSTEM VERIFICATION PROCEDURE	28
6.1	TISSUE SIMULATE LIQUID.....	28
6.1.1	<i>Recipes for Tissue Simulate Liquid.....</i>	<i>28</i>
6.1.2	<i>Test Liquids Confirmation.....</i>	<i>29</i>
6.1.3	<i>Measurement for Tissue Simulate Liquid.....</i>	<i>30</i>
6.2	SAR SYSTEM CHECK	31
6.2.1	<i>Justification for Extended SAR Dipole Calibrations</i>	<i>32</i>
6.2.2	<i>Summary System Check Result(s)</i>	<i>33</i>
6.2.3	<i>Detailed System Check Results</i>	<i>33</i>
7	TEST CONFIGURATION	34
7.1	3G SAR TEST REDUCTION PROCEDURE	34
7.2	OPERATION CONFIGURATIONS	34
7.2.1	<i>GSM Test Configuration</i>	<i>34</i>
7.2.2	<i>WCDMA Test Configuration</i>	<i>35</i>
7.2.3	<i>Wi-Fi Test Configuration.....</i>	<i>39</i>
7.2.4	<i>Bluetooth Test Configuration.....</i>	<i>44</i>
7.2.5	<i>LTE Test Configuration.....</i>	<i>45</i>

8	TEST RESULT	48
8.1	MEASUREMENT OF RF CONDUCTED POWER	48
8.1.1	Conducted Power Of GSM.....	48
8.1.2	Conducted Power Of WCDMA.....	49
8.1.3	Conducted Power Of LTE.....	50
8.1.4	Conducted Power Of Wi-Fi and BT.....	68
8.2	STAND-ALONE SAR TEST EVALUATION.....	71
8.3	MEASUREMENT OF SAR DATA.....	72
8.3.1	SAR Result Of GSM850.....	72
8.3.2	SAR Result Of GSM1900.....	73
8.3.3	SAR Result Of WCDMA Band II.....	74
8.3.4	SAR Result Of WCDMA Band V.....	75
8.3.5	SAR Result Of WCDMA Band IV.....	76
8.3.6	SAR Result Of LTE Band 2.....	77
8.3.7	SAR Result Of LTE Band 7.....	78
8.3.8	SAR Result Of LTE Band 12.....	80
8.3.9	SAR Result Of LTE Band 25.....	81
8.3.10	SAR Result Of LTE Band 26.....	82
8.3.11	SAR Result Of LTE Band 38.....	83
8.3.12	SAR Result Of LTE Band 41.....	84
8.3.13	SAR Result Of LTE Band 66.....	86
8.3.14	SAR Result Of 2.4GHz Wi-Fi.....	87
8.3.15	SAR Result Of Bluetooth.....	88
8.3.16	SAR Result Of 5GHz Wi-Fi.....	89
8.3.17	Repeat SAR Measurement.....	91
8.4	MULTIPLE TRANSMITTER EVALUATION.....	92
8.4.1	Simultaneous SAR SAR test evaluation.....	92
9	EQUIPMENT LIST	99
10	CALIBRATION CERTIFICATE	101
11	PHOTOGRAPHS	101
	APPENDIX A: DETAILED SYSTEM CHECK RESULTS	102
	APPENDIX B: DETAILED TEST RESULTS	114
	APPENDIX C: CALIBRATION CERTIFICATE	165
	APPENDIX D: PHOTOGRAPHS.....	165

1 General Information

1.1 General Description of EUT

Device Type :	portable device		
Exposure Category:	uncontrolled environment / general population		
Product Phase:	production unit		
SN:	12000300120073100115		
Hardware Version:	V1.1		
Software Version:	B3111_DVT2_20200731		
Antenna Type:	PIFA Antenna		
Device Operating Configurations :			
Modulation Mode:	GSM: GMSK, 8PSK; WCDMA: QPSK; LTE: QPSK,16QAM; WI-FI: CCK;DSSS; OFDM; BT: GFSK, π/4DQPSK,8DPSK		
Device Class:	B		
GPRS Multi-slots Class:	12	EGPRS Multi-slots Class:	12
HSDPA UE Category:	14	HSUPA UE Category	6
Power Class	4, tested with power level 5(GSM850)		
	1, tested with power level 0(GSM1900)		
	3, tested with power control "all 1"(WCDMA Band II/V/IV)		
	3, tested with power control Max Power(LTE Band 2/4/5/7/12/17/25/26/38/41/66)		
Frequency Bands:	Band	Tx (MHz)	Rx (MHz)
	GSM850	824~849	869~894
	GSM1900	1850~1910	1930~1990
	WCDMA Band II	1850~1910	1930~1990
	WCDMA Band V	824~849	869~894
	WCDMA Band IV	1710~1755	2110~2155
	LTE Band 2	1850~1910	1930~1990
	LTE Band 4	1710-1755	2110- 2155
	LTE Band 5	824-849	869-894
	LTE Band 7	2500~2570	2620~2690
	LTE Band 12	699~716	729~746
	LTE Band 17	704-716	734-746
	LTE Band 25	1850~1915	1930~1995
	LTE Band 26	814~849	859~894
	LTE Band 38	2570~2620	2570~2620
	LTE Band 41	2535-2655	2535-2655
	LTE Band 66	1710~1780	2110~2180
	WI-FI2.4G	2412~2462	2412~2462
	Bluetooth	2402~2480	2402~2480
	Wi-Fi(U-NII-1)	5150~5250	5150~5250
Wi-Fi(U-NII-2A)	5250~5350	5250~5350	
Wi-Fi(U-NII-2C)	5470~5725	5470~5725	
Wi-Fi(U-NII-3)	5725~5850	5725~5850	
Battery Information:	Model: D20		
	Rated capacity: 2450mAh		
	Manufacturer: Shenzhen Aerospace Electronic Co.,Ltd.		

Note2:

The antenna gain value is provided by the customer. The test lab will not be responsible for wrong test result due to incorrect information about antenna gain values.

1.1.1 DUT Antenna Locations(Back View)



The test device is a D20. The display diagonal dimension is 101mm and the overall diagonal dimension of this device is 139mm.

According to the distance between LTE/WCDMA/GSM/Wi-Fi/BT antennas and the sides of the EUT we can draw the conclusion that:

EUT Sides for SAR Testing						
Mode	Front	Back	Left	Right	Top	Bottom
Main Antenna	Yes	Yes	Yes	Yes	No	Yes
Wi-Fi/BT	Yes	Yes	No	Yes	Yes	No

Table 1: EUT Sides for SAR Testing

Note:

- 1) When the antenna-to-edge distance is greater than 2.5cm, such position does not need to be tested.

1.2 Test Specification

Identity	Document Title
FCC 47CFR §2.1093	Radio frequency Radiation Exposure Evaluation: Portable Devices
ANSI/IEEE Std C95.1 – 1992	Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz – 300 GHz.
IEEE 1528-2013	Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques
KDB 941225 D01 3G SAR Procedures v03r01	3G SAR Measurement Procedures
KDB 248227 D01 802.11 Wi-Fi SAR v02r02	SAR GUIDANCE FOR IEEE 802.11 (Wi-Fi) TRANSMITTERS
KDB 941225 D05 SAR for LTE Devices v02r05	SAR EVALUATION CONSIDERATIONS FOR LTE DEVICES
KDB 941225 D06 Hotspot Mode SAR v02r01	SAR Evaluation Procedures for Portable Devices with Wireless Router Capabilities
KDB 648474 D04 Handset SAR v01r03	SAR Evaluation Considerations for Wireless Handsets
KDB447498 D01 General RF Exposure Guidance v06	Mobile and Portable Devices RF Exposure Procedures and Equipment Authorization Policies
KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r04	SAR Measurement Requirements for 100 MHz to 6 GHz
KDB 865664 D02 RF Exposure Reporting v01r02	RF Exposure Compliance Reporting and Documentation Considerations

1.3 RF exposure limits

Human Exposure	Uncontrolled Environment General Population	Controlled Environment Occupational
Spatial Peak SAR* (Brain*Trunk)	1.60 W/kg	8.00 W/kg
Spatial Average SAR** (Whole Body)	0.08 W/kg	0.40 W/kg
Spatial Peak SAR*** (Hands/Feet/Ankle/Wrist)	4.00 W/kg	20.00 W/kg

Notes:

* The Spatial Peak value of the SAR averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time

** The Spatial Average value of the SAR averaged over the whole body.

*** The Spatial Peak value of the SAR averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.

Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure.

Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation.)

1.4 Test Location

Company: Compliance Certification Services Inc. Kun shan Laboratory
Address: No.10 Weiye Rd., Innovation park, Eco&Tec, Development Zone, Kunshan City, Jiangsu, China
Post code: 215300
Telephone: 86-512-57355888
Fax: 86-512-57370818
E-mail: sgs.china@sgs.com

1.5 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **CNAS (No. CNAS L4354)**

CNAS has accredited Compliance Certification Services (Kunshan) Inc. to ISO/IEC 17025:2017 General Requirements for the Competence of Testing and Calibration Laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing.

- **A2LA (Certificate No. 2541.01)**

Compliance Certification Services (Kunshan) Inc. is accredited by the American Association for Laboratory Accreditation (A2LA). Certificate No. 2541.01.

- **FCC –Designation Number: CN1172**

Compliance Certification Services Inc. has been recognized as an accredited testing laboratory.

Designation Number: CN1172.

- **ISED (CAB identifier: CN0072)**

Compliance Certification Services (Kunshan) Inc. has been recognized by Innovation, Science and Economic Development Canada (ISED) as an accredited testing laboratory

CAB Identifier: CN0072.

- **VCCI (Member No.: 1938)**

The 3m and 10m Semi-anechoic chamber and Shielded Room of Compliance Certification Services (Kunshan) Inc. has been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: R-1600, C-1707, T-1499, G-10216 respectively.

2 Laboratory Environment

Temperature	Min. = 18°C, Max. = 25 °C
Relative humidity	Min. = 30%, Max. = 70%
Ground system resistance	< 0.5 Ω
Ambient noise is checked and found very low and in compliance with requirement of standards. Reflection of surrounding objects is minimized and in compliance with requirement of standards.	

Table 2: The Ambient Conditions

3 SAR Measurements System Configuration

3.1 The SAR Measurement System

This SAR Measurement System uses a Computer-controlled 3-D stepper motor system (SPEAG DASY5 professional system). A E-field probe is used to determine the internal electric fields. The SAR can be obtained from the equation $SAR = \sigma (|E|^2) / \rho$ where σ and ρ are the conductivity and mass density of the tissue-Simulate.


The DASY5 system for performing compliance tests consists of the following items:

A standard high precision 6-axis robot (Stabile RX family) with controller, teach pendant and software .An arm extension for accommodation the data acquisition electronics (DAE).

A dosimetric probe, i.e., an isotropic E-field probe optimized and calibrated for usage in tissue simulating liquid. The probe is equipped with an optical surface detector system.

A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.

The Electro-optical converter (EOC) performs the conversion between optical and electrical of the signals for the digital communication to DAE and for the analog signal from the optical surface detection. The EOC is connected to the measurement server.

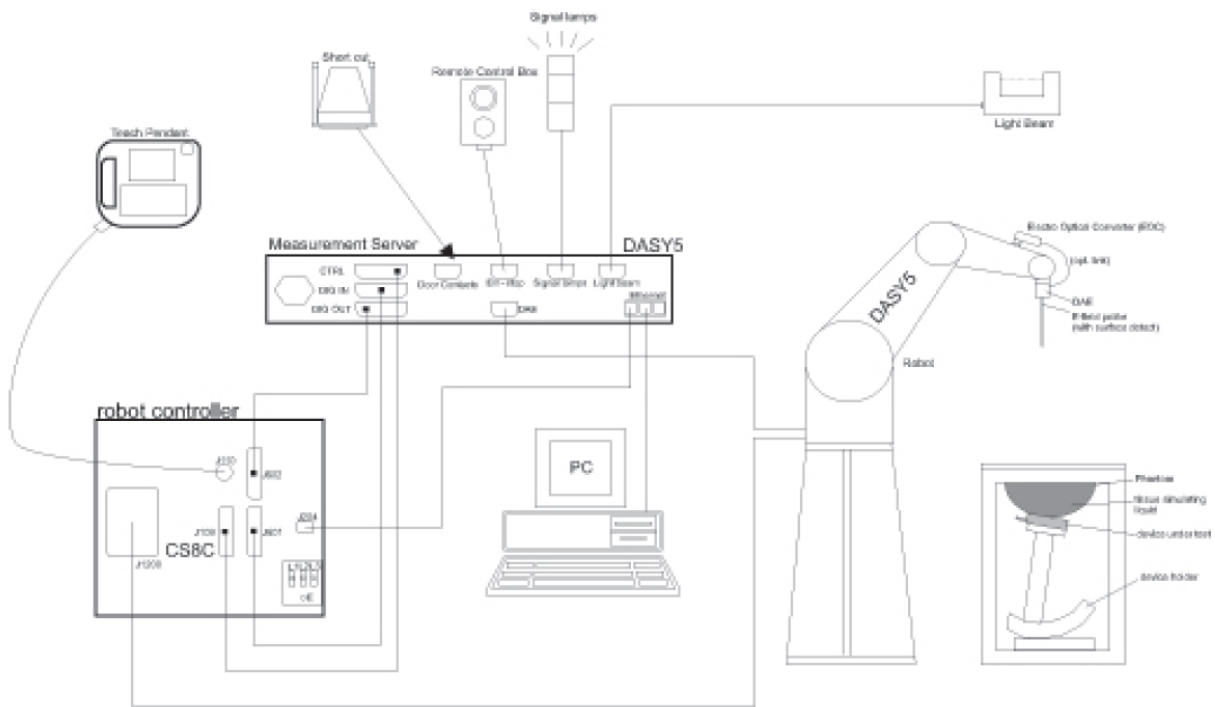


F-1. SAR Measurement System Configuration


- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.

- A probe alignment unit which improves the (absolute) accuracy of the probe positioning.
- A computer operating Windows 7.
- DASY5 software.
- Remote control with teach pendant and additional circuitry for robot safety such as warning lamps, etc.
- The SAM twin phantom enabling testing left-hand, right-hand and Body Worn usage.
- The device holder for handheld mobile phones.
- Tissue simulating liquid mixed according to the given recipes.
- Validation dipole kits allowing to validate the proper functioning of the system.


3.2 Isotropic E-field Probe EX3DV4

	<p>Symmetrical design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)</p>
<p>Calibration</p>	<p>ISO/IEC 17025 calibration service available.</p>
<p>Frequency</p>	<p>10 MHz to > 6 GHz Linearity: ± 0.2 dB (30 MHz to 6 GHz)</p>
<p>Directivity</p>	<p>± 0.3 dB in TSL (rotation around probe axis) ± 0.5 dB in TSL (rotation normal to probe axis)</p>
<p>Dynamic Range</p>	<p>10 μW/g to > 100 mW/g Linearity: ± 0.2 dB (noise: typically < 1 μW/g)</p>
<p>Dimensions</p>	<p>Overall length: 337 mm (Tip: 20 mm) Tip diameter: 2.5 mm (Body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm</p>
<p>Application</p>	<p>High precision dosimetric measurements in any exposure scenario (e.g., very strong gradient fields); the only probe that enables compliance testing for frequencies up to 6 GHz with precision of better 30%.</p>
<p>Compatibility</p>	<p>DASY3, DASY4, DASY52 SAR and higher, EASY4/MRI</p>

3.3 Data Acquisition Electronics (DAE)

Model	DAE4	
Construction	Signal amplifier, multiplexer, A/D converter and control logic. Serial optical link for communication with DASY4/5 embedded system (fully remote controlled). Two step probe touch detector for mechanical surface detection and emergency robot stop.	
Measurement Range	-100 to +300 mV (16 bit resolution and two range settings: 4mV,400mV)	
Input Offset Voltage	< 5µV (with auto zero)	
Input Bias Current	< 50 f A	
Dimensions	60 x 60 x 68 mm	


3.4 SAM Twin Phantom

Material	Vinylester, glass fiber reinforced (VE-GF)	
Liquid Compatibility	Compatible with all SPEAG tissue simulating liquids (incl. DGBE type)	
Shell Thickness	2 ± 0.2 mm (6 ± 0.2 mm at ear point)	
Dimensions (incl. Wooden Support)	Length: 1000 mm Width: 500 mm Height: adjustable feet	
Filling Volume	approx. 25 liters	
Wooden Support	SPEAG standard phantom table	

The shell corresponds to the specifications of the Specific Anthropomorphic Mannequin (SAM) phantom defined in IEEE 1528 and IEC 62209-1. It enables the dosimetric evaluation of left and right hand phone usage as well as body mounted usage at the flat phantom region. A cover prevents evaporation of the liquid. Reference markings on the phantom allow the complete setup of all predefined phantom positions and measurement grids by teaching three points with the robot.

Twin SAM V5.0 has the same shell geometry and is manufactured from the same material as Twin SAM V4.0, but has reinforced top structure.

3.5 ELI Phantom

Material	Vinylester, glass fiber reinforced (VE-GF)	
Liquid Compatibility	Compatible with all SPEAG tissue simulating liquids (incl. DGBE type)	
Shell Thickness	2.0 ± 0.2 mm (bottom plate)	
Dimensions	Major axis: 600 mm Minor axis: 400 mm	
Filling Volume	approx. 30 liters	
Wooden Support	SPEAG standard phantom table	

Phantom for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30 MHz to 6 GHz. ELI is fully compatible with the IEC 62209-2 standard and all known tissue simulating liquids. ELI has been optimized regarding its performance and can be integrated into our standard phantom tables. A cover prevents evaporation of the liquid. Reference markings on the phantom allow installation of the complete setup, including all predefined phantom positions and measurement grids, by teaching three points. The phantom is compatible with all SPEAG dosimetric probes and dipoles.

ELI V5.0 has the same shell geometry and is manufactured from the same material as ELI4, but has reinforced top structure.

3.6 Device Holder for Transmitters



F-2. Device Holder for Transmitters

- The DASY device holder is designed to cope with different positions given in the standard. It has two scales for the device rotation (with respect to the body axis) and the device inclination (with respect to the line between the ear reference points). The rotation centres for both scales are the ear reference point (ERP). Thus the device needs no repositioning when changing the angles.
- The DASY device holder has been made out of low-loss POM material having the following dielectric parameters: relative permittivity $\epsilon=3$ and loss tangent $\delta=0.02$. The amount of dielectric material has been reduced in the closest vicinity of the device, since measurements have suggested that the influence of the clamp on the test results could thus be lowered.

3.7 Measurement procedure

3.7.1 Scanning procedure

Step 1: Power reference measurement

The “reference” and “drift” measurements are located at the beginning and end of the batch process. They measure the field drift at one single point in the liquid over the complete procedure.

Step 2: Area scan

The SAR distribution at the exposed side of the head was measured at a distance of 4mm from the inner surface of the shell. The area covered the entire dimension of the head and the horizontal grid spacing was 15mm*15mm or 12mm*12mm or 10mm*10mm. Based on the area scan data, the area of the maximum absorption was determined by spline interpolation.

Step 3: Zoom scan

Around this point, a volume of 30mm*30mm*30mm (fine resolution volume scan, zoom scan) was assessed by measuring 5x5x7 points (≤ 2 GHz) and 7x7x7 points (≥ 2 GHz). On this basis of this data set, the spatial peak SAR value was evaluated with the following procedure:

The data at the surface was extrapolated, since the centre of the dipoles is 2.0mm away from the tip of the probe and the distance between the surface and the lowest measuring point is 1.2mm. (This can be variable. Refer to the probe specification). The extrapolation was based on a least square algorithm. A polynomial of the fourth order was calculated through the points in z-axes. This polynomial was then used to evaluate the points between the surface and the probe tip. The maximum interpolated value was searched with a straight-forward algorithm. Around this maximum the SAR values averaged over the spatial volumes (1g or 10g) were computed using the 3D-Spline interpolation algorithm. The volume was integrated with the trapezoidal algorithm. One thousand points were interpolated to calculate the average. All neighbouring volumes were evaluated until no neighboring volume with a higher average value was found.

The area and zoom scan resolutions specified in the table below must be applied to the SAR measurements. Probe boundary effect error compensation is required for measurements with the probe tip closer than half a probe tip diameter to the phantom surface. Both the probe tip diameter and sensor offset distance must satisfy measurement protocols; to ensure probe boundary effect errors are minimized and the higher fields closest to the phantom surface can be correctly measured and extrapolated to the phantom surface for computing 1-g SAR. Tolerances of the post-processing algorithms must be verified by the test laboratory for the scan resolutions used in the SAR measurements, according to the reference distribution functions specified in IEEE Std. 1528-2003.

		≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface		5 ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location		$30^\circ \pm 1^\circ$	$20^\circ \pm 1^\circ$
Maximum area scan spatial resolution: Δx_{Area} , Δy_{Area}		≤ 2 GHz: ≤ 15 mm 2 – 3 GHz: ≤ 12 mm	3 – 4 GHz: ≤ 12 mm 4 – 6 GHz: ≤ 10 mm
		When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be \leq the corresponding x or y dimension of the test device with at least one measurement point on the test device.	
Maximum zoom scan spatial resolution: Δx_{Zoom} , Δy_{Zoom}		≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm*	3 – 4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm*
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{Zoom}(n)$	≤ 5 mm	3 – 4 GHz: ≤ 4 mm 4 – 5 GHz: ≤ 3 mm 5 – 6 GHz: ≤ 2 mm
	graded grid	$\Delta z_{Zoom}(1)$: between 1 st two points closest to phantom surface	≤ 4 mm
		$\Delta z_{Zoom}(n>1)$: between subsequent points	$\leq 1.5 \cdot \Delta z_{Zoom}(n-1)$
Minimum zoom scan volume	x, y, z	≥ 30 mm	3 – 4 GHz: ≥ 28 mm 4 – 5 GHz: ≥ 25 mm 5 – 6 GHz: ≥ 22 mm
<p>Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details.</p> <p>* When zoom scan is required and the <i>reported</i> SAR from the <i>area scan based 1-g SAR estimation</i> procedures of KDB 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.</p>			

Step 4: Power reference measurement (drift)

The Power Drift Measurement job measures the field at the same location as the most recent power reference measurement job within the same procedure, and with the same settings. The indicated drift is mainly the variation of the DUT's output power and should vary max. $\pm 5\%$

3.7.2 Data Storage

The DASY software stores the acquired data from the data acquisition electronics as raw data (in microvolt readings from the probe sensors), together with all necessary software parameters for the data evaluation (probe calibration data, liquid parameters and device frequency and modulation data) in measurement files with the extension “.DAE3”. The software evaluates the desired unit and format for output each time the data is visualized or exported. This allows verification of the complete software setup even after the measurement and allows correction of incorrect parameter settings. For example, if a measurement has been performed with a wrong crest factor parameter in the device setup, the parameter can be corrected afterwards and the data can be re-evaluated. The measured data can be visualized or exported in different units or formats, depending on the selected probe type ([V/m], [A/m], [°C], [m W/g], [m W/cm²], [dBrel], etc.). Some of these units are not available in certain situations or show meaningless results, e.g., a SAR output in a lossless media will always be zero. Raw data can also be exported to perform the evaluation with other software packages.

3.7.3 Data Evaluation by SEMCAD

The SEMCAD software automatically executes the following procedures to calculate the field units from the microvolt readings at the probe connector. The parameters used in the evaluation are stored in the configuration modules of the software:

Probe parameters:	- Sensitivity	Normi, ai0, ai1, ai2
- Conversion factor	ConvFi	
- Diode compression point	Dcpi	
Device parameters:	- Frequency	f
- Crest factor	cf	
Media parameters:	- Conductivity	ε
- Density	ρ	

These parameters must be set correctly in the software. They can be found in the component documents or they can be imported into the software from the configuration files issued for the DASY components. In the direct measuring mode of the multimeter option, the parameters of the actual system setup are used. In the scan visualization and export modes, the parameters stored in the corresponding document files are used.

The first step of the evaluation is a linearization of the filtered input signal to account for the compression characteristics of the detector diode. The compensation depends on the input signal, the diode type and the DC-transmission factor from the diode to the evaluation electronics.

If the exciting field is pulsed, the crest factor of the signal must be known to correctly compensate for peak power. The formula for each channel can be given as:

$$V_i = U_i + U_i^2 \cdot cf / dcpi$$

With V_i = compensated signal of channel i ($i = x, y, z$)

U_i = input signal of channel i ($i = x, y, z$)

cf = crest factor of exciting field (DASY parameter)

dcpi = diode compression point (DASY parameter)

From the compensated input signals the primary field data for each channel can be evaluated:

E-field probes:

$$E_i = (V_i / Norm_i \cdot ConvF)^{1/2}$$

H-field probes:

$$H_i = (V_i)^{1/2} \cdot (a_{i0} + a_{i1}f + a_{i2}f^2) / f$$

With V_i = compensated signal of channel i ($i = x, y, z$)

N_{mi} = sensor sensitivity of channel i ($i = x, y, z$)

[mV/(V/m)²] for E-field Probes

ConvF = sensitivity enhancement in solution

a_{ij} = sensor sensitivity factors for H-field probes

f = carrier frequency [GHz]

E_i = electric field strength of channel i in V/m

H_i = magnetic field strength of channel i in A/m

The RSS value of the field components gives the total field strength (Hermitian magnitude):

$$E_{tot} = (E_x^2 + E_y^2 + E_z^2)^{1/2}$$

The primary field data are used to calculate the derived field units.

$$SAR = (E_{tot}^2 \cdot \sigma) / (\epsilon \cdot 1000)$$

With SAR = local specific absorption rate in mW/g

E_{tot} = total field strength in V/m

σ = conductivity in [mho/m] or [Siemens/m]

ϵ = equivalent tissue density in g/cm³

Note that the density is normally set to 1 (or 1.06), to account for actual brain density rather than the density of the simulation liquid. The power flow density is calculated assuming the excitation field to be a free space field.

$$P_{pwe} = E_{tot}^2 / 3770 \quad \text{or} \quad P_{pwe} = H_{tot}^2 \cdot 37.7$$

with P_{pwe} = equivalent power density of a plane wave in mW/cm²

E_{tot} = total electric field strength in V/m

H_{tot} = total magnetic field strength in A/m

4 SAR measurement variability and uncertainty

4.1 SAR measurement variability

Per KDB865664 D01 SAR measurement 100 MHz to 6 GHz v01r04, SAR measurement variability must be assessed for each frequency band, which is determined by the SAR probe calibration point and tissue-equivalent medium used for the device measurements. The additional measurements are repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device should be returned to ambient conditions (normal room temperature) with the battery fully charged before it is re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

1) Repeated measurement is not required when the original highest measured SAR is < 0.80 W/kg; steps 2) through 4) do not apply.

2) When the original highest measured SAR is ≥ 0.80 W/kg, repeat that measurement once.

3) Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is > 1.20 or when the original or repeated measurement is ≥ 1.45 W/kg ($\sim 10\%$ from the 1-g SAR limit).

4) Perform a third repeated measurement only if the original, first or second repeated measurement is ≥ 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 .

The same procedures should be adapted for measurements according to extremity and occupational exposure limits by applying a factor of 2.5 for extremity exposure and a factor of 5 for occupational exposure to the corresponding SAR thresholds.

4.2 SAR measurement uncertainty

Per KDB865664 D01 SAR Measurement 100 MHz to 6 GHz, when the highest measured 1-g SAR within a frequency band is < 1.5 W/kg, the extensive SAR measurement uncertainty analysis described in IEEE Std 1528-2013 is not required in SAR reports submitted for equipment approval. The equivalent ratio (1.5/1.6) is applied to extremity and occupational exposure conditions.

5 Description of Test Position


5.1 Head Exposure Condition/ The Head Test Position

5.1.1 SAM Phantom Shape




F-3. Front, back, and side views of SAM (model for the phantom shell). Full-head model is for illustration purposes only-procedures in this recommended practice are intended primarily for the phantom setup.


Note: The centre strip including the nose region has a different thickness tolerance.

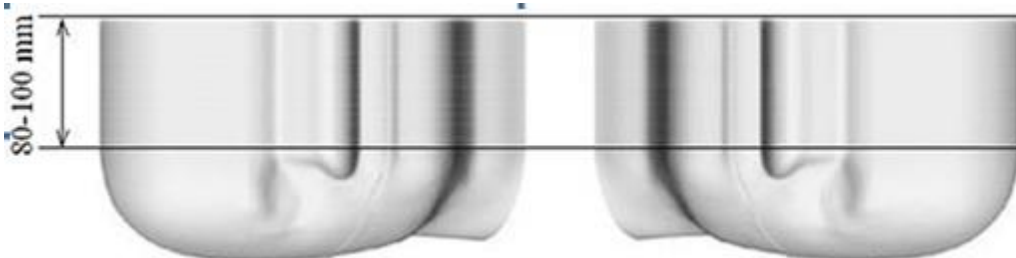

F-4. Sagittally bisected phantom with extended perimeter (shown placed on its side as used for SAR measurements)

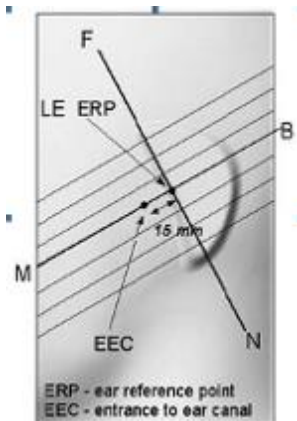


F-5. Close-up side view of phantom, showing the ear region, N-F and B-M lines, and seven cross-sectional plane locations

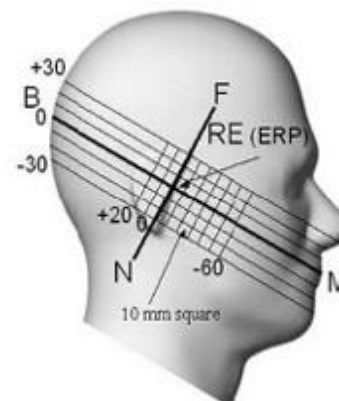


F-6. Side view of the phantom showing relevant markings and seven cross-sectional plane locations

5.1.2 EUT constructions

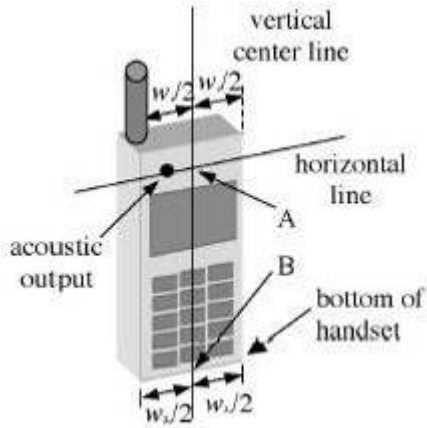

F-7. Handset vertical and horizontal reference lines-“fixed case”

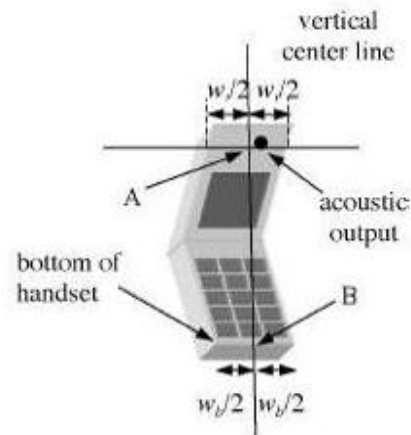


F-8. Handset vertical and horizontal reference lines-“clam-shell case”

5.1.3 Definition of the “cheek” position


- a) Position the device with the vertical centre line of the body of the device and the horizontal line crossing the centre of the ear piece in a plane parallel to the sagittal plane of the phantom ("initial position"). While maintaining the device in this plane, align the vertical centre line with the reference plane containing the three ear and mouth reference points (M, RE and LE) and align the centre of the ear piece with the line RE-LE.
- b) Translate the mobile phone box towards the phantom with the ear piece aligned with the line LE-RE until telephone touches the ear. While maintaining the device in the reference plane and maintaining the phone contact with the ear, move the bottom of the box until any point on the front side is in contact with the cheek of the phantom or until contact with the ear is lost.

5.1.4 Definition of the “tilted” position

- a) Position the device in the “cheek” position described above;
- b) While maintaining the device in the reference plane described above and pivoting against the ear, move it outward away from the mouth by an angle of 15 degrees or until contact with the ear is lost.

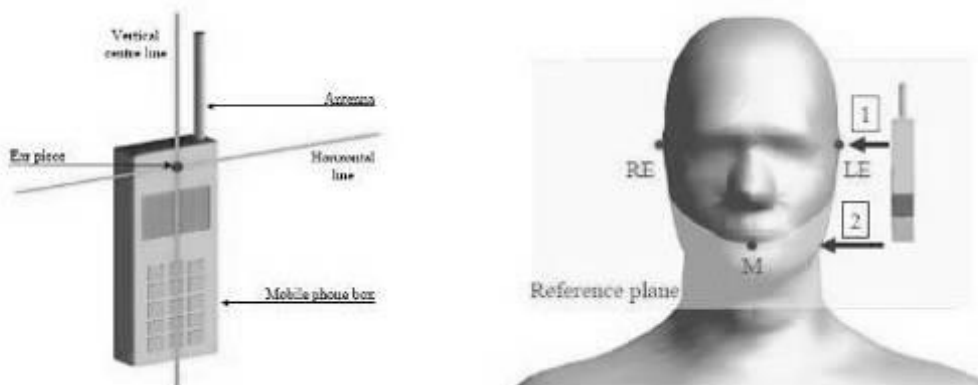

F-9. Definition of the reference lines and points, on the phone and on the phantom and initial position

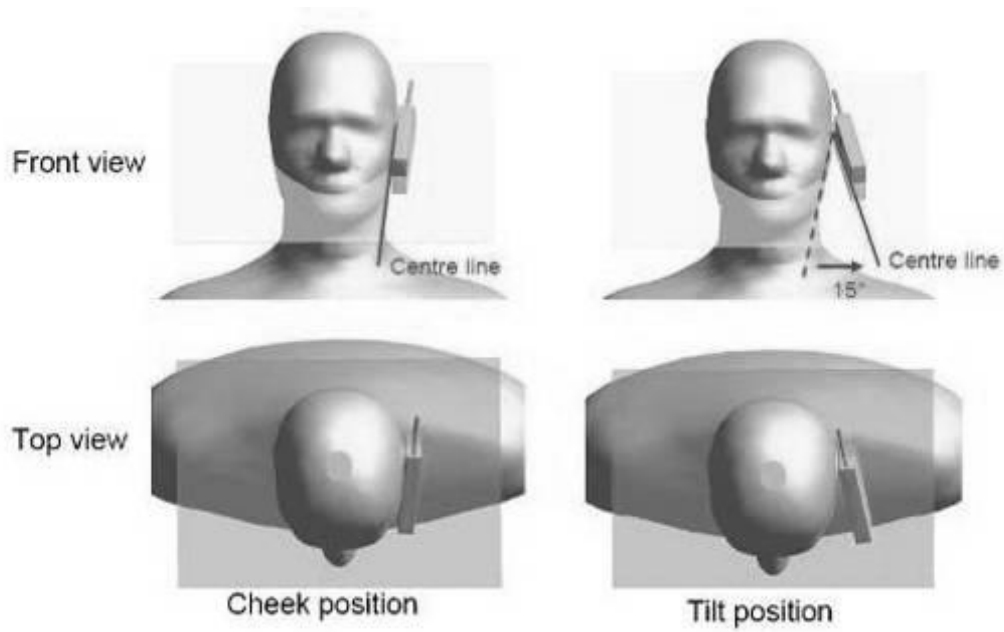

F-10. "Cheek" and "tilt" positions of the mobile phone on the left side


5.2 The Body Test Position

Body-worn operating configurations should be tested with the belt-clips and holsters attached to the device and positioned against a flat phantom in normal use configurations.

Body-worn operating configurations are tested with the belt-clips and holsters attached to the device and positioned against a flat phantom in a normal use configuration. Per FCC KDB Publication 648474 D04, Body-worn accessory exposure is typically related to voice mode operations when handsets are carried in body-worn accessories. The body-worn accessory procedures in FCC KDB Publication 447498 D01 should be used to test for body-worn accessory SAR compliance, without a headset connected to it. This enables the test results for such configuration to be compatible with that required for hotspot mode when the body-worn accessory test separation distance is greater than or equal to that required for hotspot mode, when applicable. When the reported SAR for a body-worn accessory, measured without a headset connected to the handset, is > 1.2 W/kg, the highest reported SAR configuration for that wireless mode and frequency band should be repeated for that body-worn accessory with a headset attached to the handset.

Accessories for Body-worn operation configurations are divided into two categories: those that do not contain metallic components and those that do contain metallic components. When multiple accessories that do not contain metallic components are supplied with the device, the device is tested with only the accessory that dictates the closest spacing to the body. Then multiple accessories that contain metallic components are tested with the device with each accessory. If multiple accessories share an identical metallic component (i.e. the same metallic belt-clip used with different holsters with no other metallic components) only the accessory that dictates the closest spacing to the body is tested.

Body-worn accessories may not always be supplied or available as options for some devices intended to be authorized for body-worn use. In this case, a test configuration with a separation distance between the back of the device and the flat phantom is used. Test position spacing was documented. Transmitters that are designed to operate in front of a person's face, as in push-to-talk configurations, are tested for SAR compliance with the front of the device positioned to face the flat phantom in head fluid. For devices that are carried next to the body such as a shoulder, waist or chest-worn transmitters, SAR compliance is tested with the accessories, including headsets and microphones, attached to the device and positioned against a flat phantom in a normal use configuration.

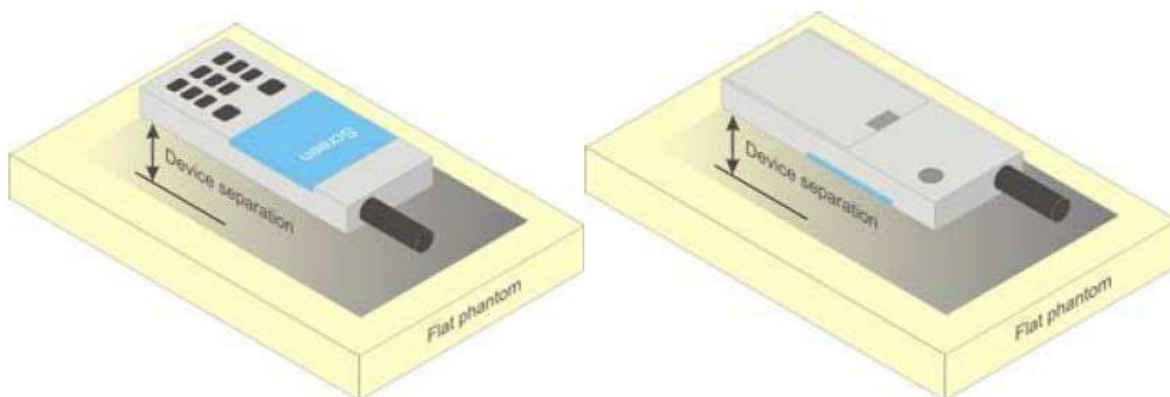

F-11. Test positions for body-worn devices

5.2.1 Wireless Router exposure conditions

Some battery-operated handsets have the capability to transmit and receive user data through simultaneous transmission of WIFI simultaneously with a separate licensed transmitter. The FCC has provided guidance in FCC KDB Publication 941225 D06 where SAR test considerations for handsets ($L \times W \geq 9 \text{ cm} \times 5 \text{ cm}$) are based on a composite test separation distance of 10 mm from the front, back and edges of the device containing transmitting antennas within 2.5 cm of their edges, determined from general mixed use conditions for this type of devices. For devices with form factors smaller than $9 \text{ cm} \times 5 \text{ cm}$, a test separation distance of 5 mm is required.

For this device the test distance of hotspot mode and Body worn mode are all 10mm. The test data can be shared.

6 SAR System Verification Procedure

6.1 Tissue Simulate Liquid

6.1.1 Recipes for Tissue Simulate Liquid

The following tables give the recipes for tissue simulating liquids to be used in different frequency bands:

Ingredients (% by weight)	Frequency (MHz)									
	450		835		915		1900		2450	
Tissue Type	Head	Body	Head	Body	Head	Body	Head	Body	Head	Body
Water	38.56	51.16	41.45	52.4	41.05	56.0	54.9	40.4	62.7	73.2
Salt (NaCl)	3.95	1.49	1.45	1.4	1.35	0.76	0.18	0.5	0.5	0.04
Sugar	56.32	46.78	56.0	45.0	56.5	41.76	0.0	58.0	0.0	0.0
HEC	0.98	0.52	1.0	1.0	1.0	1.21	0.0	1.0	0.0	0.0
Bactericide	0.19	0.05	0.1	0.1	0.1	0.27	0.0	0.1	0.0	0.0
Triton X-100	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	36.8	0.0
DGBE	0.0	0.0	0.0	0.0	0.0	0.0	44.92	0.0	0.0	26.7
Dielectric Constant	43.42	58.0	42.54	56.1	42.0	56.8	39.9	54.0	39.8	52.5
Conductivity (S/m)	0.85	0.83	0.91	0.95	1.0	1.07	1.42	1.45	1.88	1.78

HSL5GHz is composed of the following ingredients:
 Water: 50-65%
 Mineral oil: 10-30%
 Emulsifiers: 8-25%
 Sodium salt: 0-1.5%

MSL5GHz is composed of the following ingredients:
 Water: 64-78%
 Mineral oil: 11-18%
 Emulsifiers: 9-15%
 Sodium salt: 2-3%

Table 3: Recipe of Tissue Simulate Liquid

6.1.2 Test Liquids Confirmation

Simulated tissue liquid parameter confirmation

The dielectric parameters were checked prior to assessment using the SPEAG DAK3.5 dielectric probe kit. The dielectric parameters measured are reported in each correspondent section.

IEEE SCC-34/SC-2 P1528 recommended tissue dielectric parameters

The head tissue dielectric parameters recommended by the IEEE SCC-34/SC-2 in P1528 have been incorporated in the following table. These head parameters are derived from planar layer models simulating the highest expected SAR for the dielectric properties and tissue thickness variations in a human head. Other head and body tissue parameters that have not been specified in P1528 are derived from the tissue dielectric parameters computed from the 4-Cole-Cole equations and extrapolated according to the head parameters specified in P1528

Target Frequency (MHz)	Head		Body	
	ϵ_r	σ (S/m)	ϵ_r	σ (S/m)
150	52.3	0.76	61.9	0.80
300	45.3	0.87	58.2	0.92
450	43.5	0.87	56.7	0.94
835	41.5	0.90	55.2	0.97
900	41.5	0.97	55.0	1.05
915	41.5	0.98	55.0	1.06
1450	40.5	1.20	54.0	1.30
1610	40.3	1.29	53.8	1.40
1800-2000	40.0	1.40	53.3	1.52
2450	39.2	1.80	52.7	1.95
3000	38.5	2.40	52.0	2.73
5800	35.3	5.27	48.2	6.00

(ϵ_r = relative permittivity, σ = conductivity and $\rho = 1000 \text{ kg/m}^3$)

6.1.3 Measurement for Tissue Simulate Liquid


The dielectric properties for this Tissue Simulate Liquids were measured by using the Agilent Model 85070E Dielectric Probe in conjunction with Agilent E5071C Network Analyzer (300 KHz-8500 MHz). The Conductivity (σ) and Permittivity (ρ) are listed in bellow table. For the SAR measurement given in this report. The temperature variation of the Tissue Simulate Liquids was $22\pm 2^{\circ}\text{C}$.

Tissue Type	Measured Frequency (MHz)	Target Tissue ($\pm 5\%$)		Measured Tissue		Liquid Temp. ($^{\circ}\text{C}$)	Measured Date
		ϵ_r	$\sigma(\text{S/m})$	ϵ_r	$\sigma(\text{S/m})$		
750 Head	750	41.9 (39.81~44)	0.89 (0.85~0.94)	41.649	0.895	22.1	2020/12/11
835 Head	835	41.5 (39.43~43.58)	0.90 (0.86~0.95)	41.668	0.909	22.1	2020/12/10
1800 Head	1800	40.0 (38.00~42.00)	1.40 (1.33~1.47)	40.258	1.384	22.2	2020/12/07
1900 Head	1900	40.0 (38.00~42.00)	1.40 (1.33~1.47)	40.271	1.39	22.3	2020/12/08
1900 Head	1900	40.0 (38.00~42.00)	1.40 (1.33~1.47)	40.564	1.414	22.3	2020/12/09
2450 Head	2450	39.20 (37.24~41.16)	1.80 (1.71~1.89)	39.15	1.824	22	2020/12/04
2600 Head	2600	39.0 (37.05~40.95)	1.96 (1.86~2.06)	38.589	1.977	22.1	2020/12/05
2600 Head	2600	39.0 (37.05~40.95)	1.96 (1.86~2.06)	39.224	1.963	22.1	2020/12/06
5250 Head	5250	35.9 (34.11~37.70)	4.71 (4.47~4.95)	36.109	4.687	22.2	2020/12/17
5600 Head	5600	35.5 (33.73~37.28)	5.07 (4.82~5.32)	35.218	5.07	22.2	2020/12/17
5750 Head	5750	35.4 (33.63~37.17)	5.22 (4.96~5.48)	34.89	5.233	22.2	2020/12/17

Table 4: Measurement result of Tissue electric parameters

6.2 SAR System Check

The microwave circuit arrangement for system check is sketched in bellow figure. The daily system accuracy verification occurs within the flat section of the SAM phantom. A SAR measurement was performed to see if the measured SAR was within +/- 10% from the target SAR values. The tests were conducted on the same days as the measurement of the EUT. The obtained results from the system accuracy verification are displayed in the following table. During the tests, the ambient temperature of the laboratory was in the range $22\pm 2^{\circ}\text{C}$, the relative humidity was in the range 60% and the liquid depth above the ear reference points was above 15 cm in all the cases. It is seen that the system is operating within its specification, as the results are within acceptable tolerance of the reference values.

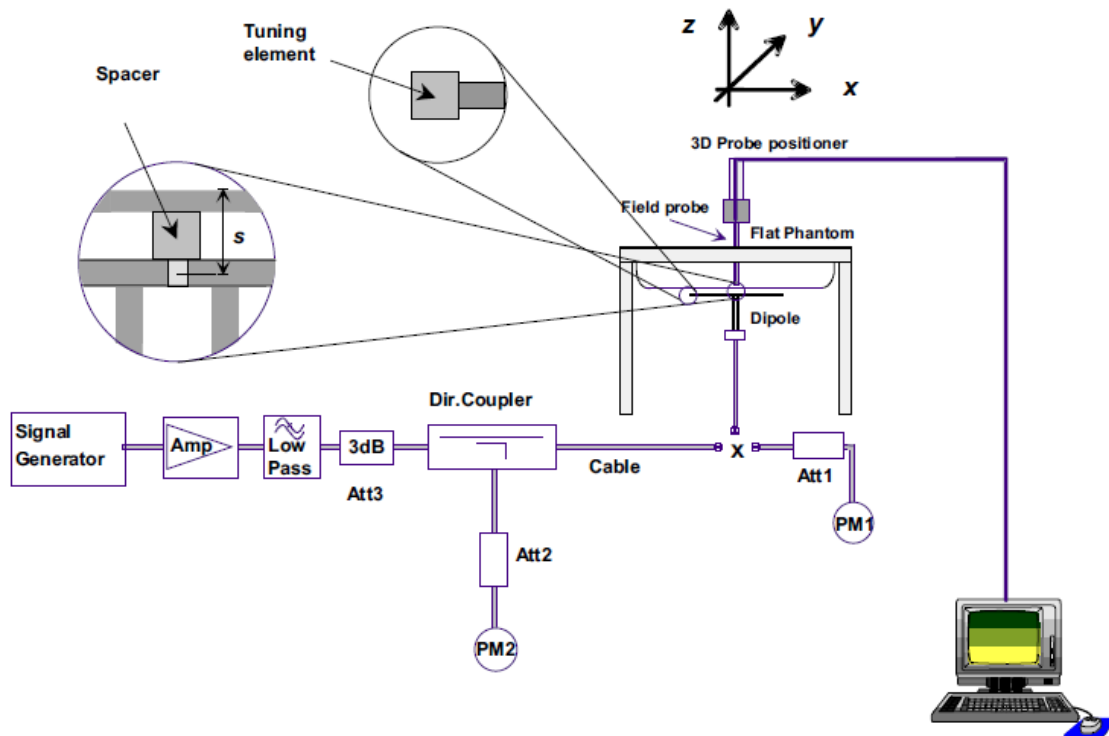

F-12. the microwave circuit arrangement used for SAR system verification

6.2.1 Justification for Extended SAR Dipole Calibrations

1) Referring to KDB865664 D01 requirements for dipole calibration, instead of the typical annual calibration recommended by measurement standards, longer calibration intervals of up to three years may be considered when it is demonstrated that the SAR target, impedance and return loss of a dipole have remain stable according to the following requirements. Each measured dipole is expected to evaluate with the following criteria at least on annual interval in Appendix C.

- a) There is no physical damage on the dipole;
- b) System check with specific dipole is within 10% of calibrated value;
- c) Return-loss is within 10% of calibrated measurement;
- d) Impedance is within 5Ω from the previous measurement.

2) Network analyzer probe calibration against air, distilled water and a shorting block performed before measuring liquid parameters.

6.2.2 Summary System Check Result(s)

Validation Kit		Measured SAR 250mW	Measured SAR 250mW	Measured SAR (normalized to 1w)	Measured SAR (normalized to 1w)	Target SAR (normalized to 1w) (±10%)	Target SAR (normalized to 1w) (±10%)	Liquid Temp. (°C)	Measured Date
		1g (W/kg)	10g (W/kg)	1g (W/kg)	10g (W/kg)	1-g(W/kg)	10-g(W/kg)		
D750 V2	Head	2.08	1.33	8.32	5.32	8.23 (7.41~9.05)	5.41 (4.87~5.95)	22.1	2020/12/11
D835 V2	Head	2.32	1.55	9.28	6.2	9.41 (8.47~10.35)	6.25 (5.63~6.88)	22.1	2020/12/10
D1800 V2	Head	9.55	5.01	38.2	20.04	38.4 (34.56~42.24)	20.2 (18.18~22.22)	22.2	2020/12/07
D1900 V2	Head	10	5.15	40	20.6	39.7 (35.73~43.67)	20.5 (18.45~22.55)	22.3	2020/12/08
D1900 V2	Head	9.53	4.92	38.12	19.68	39.7 (35.73~43.67)	20.5 (18.45~22.55)	22.3	2020/12/09
D2450 V2	Head	12.8	5.89	51.2	23.56	53 (47.70~58.30)	24.6 (22.14~27.60)	22	2020/12/04
D2600 V2	Head	13.5	6.01	54	24.04	56.2 (50.58~61.82)	25 (22.50~27.50)	22.1	2020/12/05
Validation Kit		Measured SAR 100mW	Measured SAR 100mW	Measured SAR (normalized to 1w)	Measured SAR (normalized to 1w)	Target SAR (normalized to 1w) (±10%)	Target SAR (normalized to 1w) (±10%)	Liquid Temp. (°C)	Measured Date
		1g (W/kg)	10g (W/kg)	1g (W/kg)	10g (W/kg)	1-g(W/kg)	10-g(W/kg)		
D5GHz V2	Head (5.25GHz)	8.06	2.33	80.6	23.3	77.7 (69.93~85.47)	22.4 (20.16~24.64)	22.2	2020/12/17
	Head (5.6GHz)	8.32	2.45	83.2	24.5	81.2 (73.08~89.32)	23.5 (21.15~25.85)	22.2	2020/12/17
	Head (5.75GHz)	8.05	2.31	80.5	23.1	78.9 (71.01~86.79)	22.7 (20.43~24.97)	22.2	2020/12/17

Table 5: SAR System Check Result

6.2.3 Detailed System Check Results

Please see the Appendix A

7 Test Configuration

7.1 3G SAR Test Reduction Procedure

According to KDB 941225D01, in the following procedures, the mode tested for SAR is referred to as the primary mode. The equivalent modes considered for SAR test reduction are denoted as secondary modes. Both primary and secondary modes must be in the same frequency band. When the maximum output power and tune-up tolerance specified for production units in a secondary mode is $\leq \frac{1}{4}$ dB higher than the primary mode or when the highest reported SAR of the primary mode is scaled by the ratio of specified maximum output power and tune-up tolerance of secondary to primary mode and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for the secondary mode. This is referred to as the 3G SAR test reduction procedure in the following SAR test guidance, where the primary mode is identified in the applicable wireless mode test procedures and the secondary mode is wireless mode being considered for SAR test reduction by that procedure. When the 3G SAR test reduction procedure is not satisfied, it is identified as “otherwise” in the applicable procedures; SAR measurement is required for the secondary mode.

7.2 Operation Configurations

7.2.1 GSM Test Configuration

SAR tests for GSM 850 and GSM 1900, a communication link is set up with a base station by air link. Using CMW500 the power lever is set to “5” and “0” in SAR of GSM 850 and GSM 1900. The tests in the band of GSM 850 and GSM 1900 are performed in the mode of GPRS/EGPRS function. Since the GPRS class is 12 for this EUT, it has at most 4 timeslots in uplink and at most 4 timeslots in downlink, the maximum total timeslot is 5. The EGPRS class is 12 for this EUT, it has at most 4 timeslots in uplink, and at most 4 timeslots in downlink, the maximum total timeslot is 5.

SAR test reduction for GPRS and EDGE modes is determined by the source-based time-averaged output power specified for production units, including tune-up tolerance. The data mode with highest specified time-averaged output power should be tested for SAR compliance in the applicable exposure conditions. For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested.

When SAR tests for EGPRS mode is necessary, GMSK modulation should be used to minimize SAR measurement error due to higher peak-to-average power (PAR) ratios inherent in 8-PSK.

The 3G SAR test reduction procedure is applied to 8-PSK EDGE with GMSK GPRS/EDGE as the primary mode.

7.2.2 WCDMA Test Configuration

1) . Output Power Verification

Maximum output power is verified on the high, middle and low channels according to procedures described in section 5.2 of 3GPP TS 34.121, using the appropriate RMC or AMR with TPC (transmit power control) set to all "1's" for WCDMA/HSDPA or by applying the required inner loop power control procedures to maintain maximum output power while HSUPA is active. Results for all applicable physical channel configurations (DPCCH, DPDCHn and spreading codes, HSDPA, HSPA) are required in the SAR report. All configurations that are not supported by the handset or cannot be measured due to technical or equipment limitations must be clearly identified.

2) . Head SAR

SAR for next to the ear head exposure is measured using a 12.2 kbps RMC with TPC bits configured to all "1's". The 3G SAR test reduction procedure is applied to AMR configurations with 12.2 kbps RMC as the primary mode. Otherwise, SAR is measured for 12.2 kbps AMR in 3.4 kbps SRB (signaling radio bearer) using the highest reported SAR configuration in 12.2 kbps RMC for head exposure

3) . Body SAR

SAR for body configurations is measured using a 12.2 kbps RMC with/.....TPC bits configured to all "1's". The 3G SAR test reduction procedure is applied to other spreading codes and multiple DPDCHn configurations supported by the handset with 12.2 kbps RMC as the primary mode. Otherwise, SAR is measured using an applicable RMC configuration with the corresponding spreading code or DPDCHn, for the highest reported body-worn accessory exposure SAR configuration in 12.2 kbps RMC. When more than 2 DPDCHn are supported by the handset, it may be necessary to configure additional DPDCHn using FTM (Factory Test Mode) or other chipset based test approaches with parameters similar to those used in 384 kbps and 768 kbps RMC.

4) . HSDPA / HSUPA / DC-HSDPA

According to KDB 941225 D01v03, RMC 12.2kbps setting is used to evaluate SAR. If the maximum output power and tune-up tolerance specified for production units in HSDPA / HSUPA / DC-HSDPA is $\leq \frac{1}{4}$ dB higher than RMC 12.2Kbps or when the highest reported SAR of the RMC12.2Kbps is scaled by the ratio of specified maximum output power and tune-up tolerance of HSDPA / HSUPA / DC-HSDPA to RMC12.2Kbps and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA

a) HSDPA

HSDPA is configured according to the applicable UE category of a test device. The number of HS-DSCH/HS-PDSCHs, HARQ processes, minimum inter-TTI interval, transport block sizes and RV coding sequence are defined by the H-set. To maintain a consistent test configuration and stable transmission conditions, QPSK is used in the H-set for SAR testing. HS-DPCCH should be configured with a CQI feedback cycle of 4 ms and a CQI repetition factor of 2 to maintain a constant rate of active CQI slots. DPCCH and DPDCH gain factors (β_c , β_d), and HS-DPCCH power offset parameters (Δ_{ACK} , Δ_{NACK} , Δ_{CQI}) are set according to values indicated in the following table. The CQI value is determined by the UE category, transport block size, number of HS-PDSCHs and modulation used in the H-set.

Sub-test	β_c	Bd	$\beta_d(\text{SF})$	β_c/β_d	β_{hs}	CM(dB)	MPR (dB)
1	2/15	15/15	64	2/15	4/15	0.0	0
2	12/15(3)	15/15(3)	64	12/15(3)	24/15	1.0	0
3	15/15	8/15	64	15/8	30/15	1.5	0.5
4	15/15	4/15	64	15/4	30/15	1.5	0.5

Note1: ΔACK , ΔNACK and $\Delta\text{CQI}=8$ Ahs = $\beta_{hs}/\beta_c=30/15$ $\beta_{hs}=30/15*\beta_c$
 Note2: For the HS-DPCCH power mask requirement test in clause 5.2C,5.7A, and the Error Vector Magnitude(EVM) with HS-DPCCH test in clause 5.13.1.A, and HSDPA EVM with phase discontinuity in clause 5.13.1AA, ΔACK and $\Delta\text{NACK}=8$ (Ahs=30/15) with $\beta_{hs}=30/15*\beta_c$, and $\Delta\text{CQI}=7$ (Ahs=24/15) with $\beta_{hs}=24/15*\beta_c$.
 Note3: CM=1 for $\beta_c/\beta_d =12/15$, $\beta_{hs}/\beta_c=24/15$. For all other combinations of DPDCH, DPCCH and HS-DPCCH the MPR is based on the relative CM difference. This is applicable for only UEs that support HSDPA in release 6 and later releases.

The measurements were performed with a Fixed Reference Channel (FRC) and H-Set 1 QPSK.

Parameter	Value
Nominal average inf. bit rate	534 kbit/s
Inter-TTI Distance	3 TTI"s
Number of HARQ Processes	2 Processes
Information Bit Payload	3202 Bits
MAC-d PDU size	336 Bits
Number Code Blocks	1 Block
Binary Channel Bits Per TTI	4800 Bits
Total Available SMLs in UE	19200 SMLs
Number of SMLs per HARQ Process	9600 SMLs
Coding Rate	0.67
Number of Physical Channel Codes	5

Table 6: settings of required H-Set 1 QPSK acc. to 3GPP 34.121

HS-DSCH Category	Maximum HS-DSCH Codes Received	Minimum Inter-TTI Interval	Maximum HS-DSCH Transport Block Bits/HS-DSCH TTI	Total Soft Channel Bits
1	5	3	7298	19200
2	5	3	7298	28800
3	5	2	7298	28800
4	5	2	7298	38400
5	5	1	7298	57600
6	5	1	7298	67200
7	10	1	14411	115200
8	10	1	14411	134400
9	15	1	25251	172800
10	15	1	27952	172800
11	5	2	3630	14400
12	5	1	3630	28800
13	15	1	34800	259200
14	15	1	42196	259200
15	15	1	23370	345600
16	15	1	27952	345600

Table 7: HSDPA UE category

b) HSUPA

Due to inner loop power control requirements in HSUPA, a commercial communication test set should be used for the output power and SAR tests. The 12.2 kbps RMC, FRC H-set 1 and E-DCH configurations for HSUPA should be configured according to the values indicated below as well as other applicable procedures described in the „WCDMA Handset“ and „Release 5 HSUPA Data Device“ sections of 3G device.

Sub-test ¹	β_c ²	β_{d1} ²	β_d (SF) ³	β_c/β_{d1}	β_{hs} ⁽¹⁾	β_{ec} ²	β_{ed} ²	β_c (SF) ²	β_{ed} (code) ²	CM ⁽²⁾ (dB) ²	MP R ² (dB) ²	AG ⁽⁴⁾ Index ²	E-TFC I ²
1 ²	11/15 ⁽³⁾ ²	15/15 ⁽³⁾ ²	64 ²	11/15 ⁽³⁾ ²	22/15 ²	209/225 ²	1039/225 ²	4 ²	1 ²	1.0 ²	0.0 ²	20 ²	75 ²
2 ²	6/15 ²	15/15 ²	64 ²	6/15 ²	12/15 ²	12/15 ²	94/75 ²	4 ²	1 ²	3.0 ²	2.0 ²	12 ²	67 ²
3 ²	15/15 ²	9/15 ²	64 ²	15/9 ²	30/15 ²	30/15 ²	$\beta_{ed1}:47/15$ $\beta_{ed2}:47/15$ ²	4 ²	2 ²	2.0 ²	1.0 ²	15 ²	92 ²
4 ²	2/15 ²	15/15 ²	64 ²	2/15 ²	4/15 ²	2/15 ²	56/75 ²	4 ²	1 ²	3.0 ²	2.0 ²	17 ²	71 ²
5 ²	15/15 ⁽⁴⁾ ²	15/15 ⁽⁴⁾ ²	64 ²	15/15 ⁽⁴⁾ ²	30/15 ²	24/15 ²	134/15 ²	4 ²	1 ²	1.0 ²	0.0 ²	21 ²	81 ²

Note 1: $\Delta ACK, \Delta NACK$ and $\Delta CQI=8$ $A_{hs} = \beta_{hs}/\beta_c = 30/15$ $\beta_{hs} = 30/15 * \beta_c$
 Note 2: CM = 1 for $\beta_c/\beta_d = 12/15, \beta_{hs}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference²
 Note 3 : For subtest 1 the β_c/β_{d1} ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 10/15$ and $\beta_{d1} = 15/15$ ²
 Note 4 : For subtest 5 the β_c/β_{d1} ratio of 15/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 14/15$ and $\beta_{d1} = 15/15$ ²
 Note 5 : Testing UE using E-DPDCH Physical Layer category 1 Sub-test 3 is not required according to TS 25.306 Table 5.1g²
 Note 6: β_{ed} can not be set directly; it is set by Absolute Grant Value.²

Table 8: Subtests for WCDMA Release 6 HSUPA

UE E-DCH Category	Maximum E-DCH Codes Transmitted	Number of HARQ Processes	E-DCH TTI(ms)	Minimum Spreading Factor	Maximum E-DCH Transport Block Bits	Max Rate (Mbps)
1	1	4	10	4	7110	0.7296
2	2	8	2	4	2798	1.4592
	2	4	10	4	14484	
3	2	4	10	4	14484	1.4592
4	2	8	2	2	5772	2.9185
	2	4	10	2	20000	2.00
5	2	4	10	2	20000	2.00
6 (No DPDCH)	4	8	10	2SF2&2SF	11484	5.76
	4	4	2	4	20000	2.00
7 (No DPDCH)	4	8	2	2SF2&2SF	22996	?
	4	4	10	4	20000	?

NOTE: When 4 codes are transmitted in parallel, two codes shall be transmitted with SF2 and two with SF4. UE categories 1 to 6 support QPSK only. UE category 7 supports QPSK and 16QAM. (TS25.306-7.3.0).

Table 9: HSUPA UE category


7.2.3 Wi-Fi Test Configuration

A Wi-Fi device must be configured to transmit continuously at the required data rate, channel bandwidth and signal modulation, using the highest transmission duty factor supported by the test mode tools for SAR measurement.

7.2.3.1 Duty cycle


1) 2.4GHz Wi-Fi 802.11b:

Wi-Fi1 802.11b 1M: Duty cycle= $(9.63-1.27)/(9.69-1.27)=99.29\%$

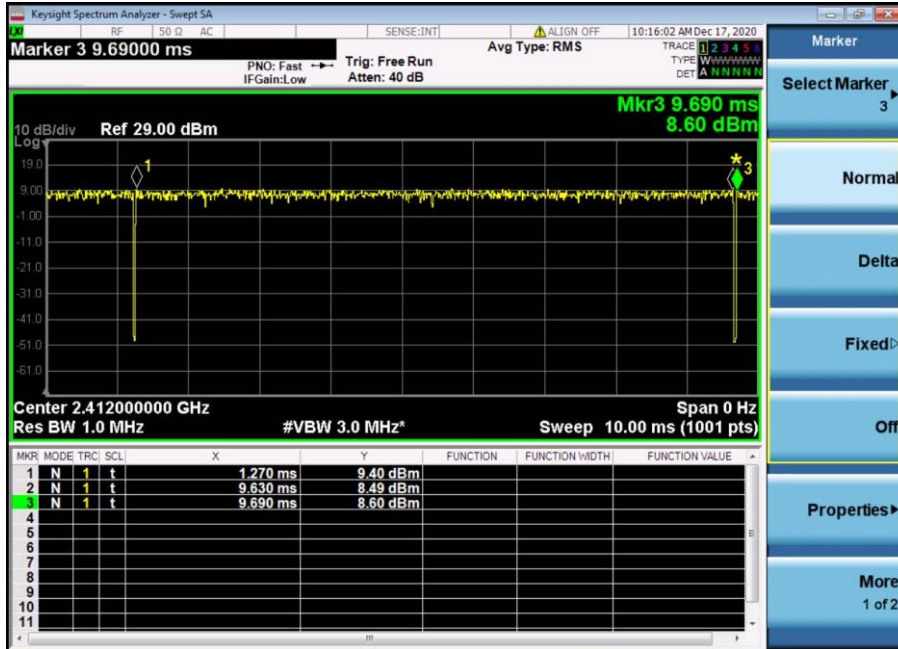

2) 5GHz Wi-Fi 802.11a:

Wi-Fi 802.11a 6M: Duty cycle= $(3.425-2.045)/(3.48-2.045)=96.17\%$

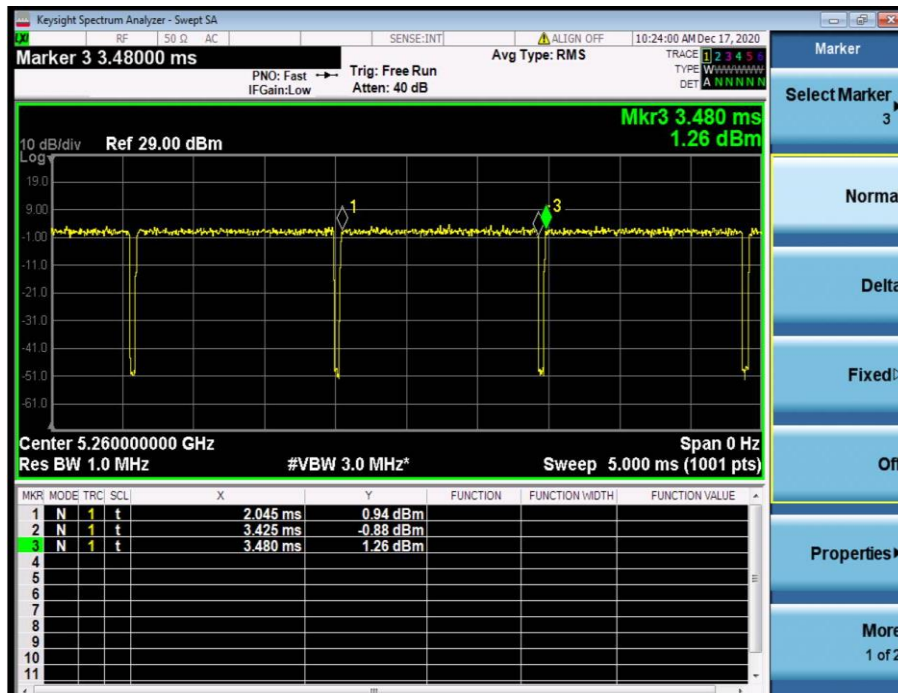

7.2.3.2 Initial Test Position SAR Test Reduction Procedure

DSSS and OFDM configurations are considered separately according to the required SAR procedures. SAR is measured in the initial test position using the 802.11 transmission mode configuration required by the DSSS procedure or initial test configuration and subsequent test configuration(s) according to the OFDM procedures. The initial test position procedure is described in the following:

- 1) .When the reported SAR of the initial test position is ≤ 0.4 W/kg, further SAR measurement is not required for the other (remaining) test positions in that exposure configuration and 802.11 transmission mode combinations within the frequency band or aggregated band. SAR is also not required for that exposure configuration in the subsequent test configuration(s).
- 2) .When the reported SAR of the initial test position is > 0.4 W/kg, SAR is repeated for the 802.11 transmission mode configuration tested in the initial test position using subsequent highest extrapolated or estimated 1-g SAR conditions determined by area scans or next closest/smallest test separation distance and maximum RF coupling test positions based on manufacturer justification, on the highest maximum output power channel, until the reported SAR is ≤ 0.8 W/kg or all required test positions (left, right, touch, tilt or subsequent surfaces and edges) are tested.
- 3) .For all positions/configurations tested using the initial test position and subsequent test positions, when the reported SAR is > 0.8 W/kg, SAR is measured for these test positions/configurations on the subsequent next highest measured output power channel(s) until the reported SAR is ≤ 1.2 W/kg or all required channels are tested. a) Additional power measurements may be required for this step, which should be limited to those necessary for identifying the subsequent highest output power channels.

7.2.3.3 Initial Test Configuration Procedures

An initial test configuration is determined for OFDM transmission modes according to the channel bandwidth, modulation and data rate combination(s) with the highest maximum output power specified for production units in each standalone and aggregated frequency band. SAR is measured using the highest measured maximum output power channel. For configurations with the same specified or measured maximum output power, additional transmission mode and test channel selection procedures are required. SAR test reduction for subsequent highest output test channels is determined according to *reported* SAR of the initial test configuration.

For next to the ear, hotspot mode and UMC mini-tablet exposure configurations where multiple test positions are required, the initial test position procedure is applied to minimize the number of test positions required for SAR measurement using the initial test configuration transmission mode. For fixed exposure conditions that do not have multiple SAR test positions, SAR is measured in the transmission mode determined by the initial test configuration.

When the *reported* SAR of the initial test configuration is > 0.8 W/kg, SAR measurement is required for subsequent next highest measured output power channel(s) in the initial test configuration until *reported* SAR is ≤ 1.2 W/kg or all required channels are tested.

7.2.3.4 Subsequent Test Configuration Procedures

SAR measurement requirements for the remaining 802.11 transmission mode configurations that have not been tested in the initial test configuration are determined separately for each standalone and aggregated frequency band, in each exposure condition, according to the maximum output power specified for production units. The initial test position procedure is applied to next to the ear, UMPC mini-tablet and hotspot mode configurations. When the same maximum output power is specified for multiple transmission modes, additional power measurements may be required to determine if SAR measurements are required for subsequent highest output power channels in a subsequent test configuration. The subsequent test configuration and SAR measurement procedures are described in the following.

- 1) .When SAR test exclusion provisions of KDB Publication 447498 are applicable and SAR measurement is not required for the initial test configuration, SAR is also not required for the next highest maximum output power transmission mode subsequent test configuration(s) in that frequency band or aggregated band and exposure configuration.
- 2) .When the highest *reported* SAR for the initial test configuration (when applicable, include subsequent

highest output channels), according to the initial test position or fixed exposure position requirements, is adjusted by the ratio of the subsequent test configuration to initial test configuration specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg, SAR is not required for that subsequent test configuration.

- 3) . The number of channels in the initial test configuration and subsequent test configuration can be different due to differences in channel bandwidth. When SAR measurement is required for a subsequent test configuration and the channel bandwidth is smaller than that in the initial test configuration, all channels in the subsequent test configuration that overlap with the larger bandwidth channel tested in the initial test configuration should be used to determine the highest maximum output power channel. This step requires additional power measurement to identify the highest maximum output power channel in the subsequent test configuration to determine SAR test reduction.
 - a) SAR should first be measured for the channel with highest measured output power in the subsequent test configuration.
 - b) SAR for subsequent highest measured maximum output power channels in the subsequent test configuration is required only when the *reported* SAR of the preceding higher maximum output power channel(s) in the subsequent test configuration is > 1.2 W/kg or until all required channels are tested. i) For channels with the same measured maximum output power, SAR should be measured using the channel closest to the center frequency of the larger channel bandwidth channel in the initial test configuration.
- 4) . SAR measurements for the remaining highest specified maximum output power OFDM transmission mode configurations that have not been tested in the initial test configuration (highest maximum output) or subsequent test configuration(s) (subsequent next highest maximum output power) is determined by recursively applying the subsequent test configuration procedures in this section to the remaining configurations according to the following:
 - a) replace "subsequent test configuration" with "next subsequent test configuration" (i.e., subsequent next highest specified maximum output power configuration)
 - b) replace "initial test configuration" with "all tested higher output power configurations"

7.2.3.5 2.4 GHz Wi-Fi SAR Procedures

Separate SAR procedures are applied to DSSS and OFDM configurations in the 2.4 GHz band to simplify DSSS test requirements. For 802.11b DSSS SAR measurements, DSSS SAR procedure applies to fixed exposure test position and initial test position procedure applies to multiple exposure test positions. When SAR measurement is required for an OFDM configuration, the initial test configuration, subsequent test configuration and initial test position procedures are applied. The SAR test exclusion requirements for 802.11g/n OFDM configurations are described in following.

- **802.11b DSSS SAR Test Requirements**

SAR is measured for 2.4 GHz 802.11b DSSS using either a fixed test position or, when applicable, the initial test position procedure. SAR test reduction is determined according to the following:

- 1) . When the reported SAR of the highest measured maximum output power channel for the exposure configuration is ≤ 0.8 W/kg, no further SAR testing is required for 802.11b DSSS in that exposure configuration.
- 2) . When the reported SAR is > 0.8 W/kg, SAR is required for that exposure configuration using the next highest measured output power channel. When any reported SAR is > 1.2 W/kg, SAR is required for the third channel; i.e., all channels require testing.

- **2.4 GHz 802.11g/n OFDM SAR Test Exclusion Requirements**

When SAR measurement is required for 2.4 GHz 802.11g/n OFDM configurations, the measurement and test reduction procedures for OFDM are applied (section 5.3, including sub-sections). SAR is not required for the following 2.4 GHz OFDM conditions.

- 1) . When KDB Publication 447498 SAR test exclusion applies to the OFDM configuration.
- 2) . When the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.

7.2.3.6 5 GHz Wi-Fi SAR Procedures

- **U-NII-1 and U-NII-2A Bands**

For devices that operate in only one of the U-NII-1 and U-NII-2A bands, the normally required SAR procedures for OFDM configurations are applied. For devices that operate in both U-NII bands using the same transmitter and

antenna(s), SAR test reduction is determined according to the following:

- 1) When the same maximum output power is specified for both bands, begin SAR measurement in U-NII-2A band by applying the OFDM SAR requirements. If the highest reported SAR for a test configuration is ≤ 1.2 W/kg, SAR is not required for U-NII-1 band for that configuration (802.11 mode and exposure condition); otherwise, both bands are tested independently for SAR.
- 2) When different maximum output power is specified for the bands, begin SAR measurement in the band with higher specified maximum output power. The highest reported SAR for the tested configuration is adjusted by the ratio of lower to higher specified maximum output power for the two bands. When the adjusted SAR is ≤ 1.2 W/kg, SAR is not required for the band with lower maximum output power in that test configuration; otherwise, both bands are tested independently for SAR.
- 3) The two U-NII bands may be aggregated to support a 160 MHz channel on channel number 50. Without additional testing, the maximum output power for this is limited to the lower of the maximum output power certified for the two bands. When SAR measurement is required for at least one of the bands and the highest reported SAR adjusted by the ratio of specified maximum output power of aggregated to standalone band is > 1.2 W/kg, SAR is required for the 160 MHz channel. This procedure does not apply to an aggregated band with maximum output higher than the standalone band(s); the aggregated band must be tested independently for SAR. SAR is not required when the 160 MHz channel is operating at a reduced maximum power and also qualifies for SAR test exclusion.

• U-NII-2C and U-NII-3 Bands

The frequency range covered by these bands is 380 MHz (5.47 – 5.85 GHz), which requires a minimum of at least two SAR probe calibration frequency points to support SAR measurements. when Terminal Doppler Weather Radar (TDWR) restriction applies, all channels that operate at 5.60 – 5.65 GHz must be included to apply the SAR test reduction and measurement procedures.

When the same transmitter and antenna(s) are used for U-NII-2C band and U-NII-3 band or 5.8 GHz band of §15.247, the bands may be aggregated to enable additional channels with 20, 40 or 80 MHz bandwidth to span across the band gap, as illustrated in Appendix B. The maximum output power for the additional band gap channels is limited to the lower of those certified for the bands. Unless band gap channels are permanently disabled, they must be considered for SAR testing. The frequency range covered by these bands is 380 MHz (5.47 – 5.85 GHz), which requires a minimum of at least two SAR probe calibration frequency points to support SAR measurements. To maintain SAR measurement accuracy and to facilitate test reduction, the channels in U-NII-2C band above 5.65 GHz may be grouped with the 5.8 GHz channels in U-NII-3 or §15.247 band to enable two SAR probe calibration frequency points to cover the bands, including the band gap channels. When band gap channels are supported and the bands are not aggregated for SAR testing, band gap channels must be considered independently in each band according to the normally required OFDM SAR measurement and probe calibration frequency points requirements.

• OFDM Transmission Mode SAR Test Configuration and Channel Selection Requirements

The initial test configuration for 5 GHz OFDM transmission modes is determined by the 802.11 configuration with the highest maximum output power specified for production units, including tune-up tolerance, in each standalone and aggregated frequency band. SAR for the initial test configuration is measured using the highest maximum output power channel determined by the default power measurement procedures. When multiple configurations in a frequency band have the same specified maximum output power, the initial test configuration is determined according to the following steps applied sequentially.

- 1) The largest channel bandwidth configuration is selected among the multiple configurations with the same specified maximum output power.
- 2) If multiple configurations have the same specified maximum output power and largest channel bandwidth, the lowest order modulation among the largest channel bandwidth configurations is selected.
- 3) If multiple configurations have the same specified maximum output power, largest channel bandwidth and lowest order modulation, the lowest data rate configuration among these configurations is selected.
- 4) When multiple transmission modes (802.11a/g/n/ac) have the same specified maximum output power, largest channel bandwidth, lowest order modulation and lowest data rate, the lowest order 802.11 mode is selected; i.e., 802.11a is chosen over 802.11n then 802.11ac or 802.11g is chosen over 802.11n. After an initial test configuration is determined, if multiple test channels have the same measured maximum output power, the channel chosen for SAR measurement is determined according to the following. These channel

selection procedures apply to both the initial test configuration and subsequent test configuration(s), with respect to the default power measurement procedures or additional power measurements required for further SAR test reduction. The same procedures also apply to subsequent highest output power channel(s) selection.

- a) The channel closest to mid-band frequency is selected for SAR measurement.
- b) For channels with equal separation from mid-band frequency; for example, high and low channels or two mid-band channels, the higher frequency (number) channel is selected for SAR measurement.

- **SAR Test Requirements for OFDM configurations**

When SAR measurement is required for 802.11 a/n/ac OFDM configurations, each standalone and frequency aggregated band is considered separately for SAR test reduction. When the same transmitter and antenna(s) are used for U-NII-1 and U-NII-2A bands, additional SAR test reduction applies. When band gap channels between U-NII-2C band and 5.8 GHz U-NII-3 or §15.247 band are supported, the highest maximum output power transmission mode configuration and maximum output power channel across the bands must be used to determine SAR test reduction, according to the initial test configuration and subsequent test configuration requirements. In applying the initial test configuration and subsequent test configuration procedures, the 802.11 transmission configuration with the highest specified maximum output power and the channel within a test configuration with the highest measured maximum output power should be clearly distinguished to apply the procedures.

7.2.4 BluetoothTest Configuration


For the Bluetooth SAR tests, a communication link is set up with the test mode software for BT mode test. Bluetooth USES frequency hopping technology to divide the transmitted data into packets and transmit the packets respectively through 79 designated Bluetooth channels, 1MHz Bandwidth, frequency hops at 1600 hops/second per the Bluetooth standard. The Radio Frequency Channel Number (RFCN) is allocated to 0, 39 and 78 respectively in the case of 2402~2480 MHz during the test at each test frequency channel, the EUT is operated at the RF continuous emission mode.

During Bluetooth SAR testing EUT is configured with the Bluetooth continuous TX tool, and the transmission duty factor was monitored on the spectrum analyzer with zero-span setting.

For Bluetooth SAR testing, Bluetooth engineering test software installed on the EUT can provide continuous transmitting RF signal.

7.2.4.1 Duty cycle

Bluetooth duty cycle: $(4.68-1.83)/(5.57-1.83)=76.20\%$

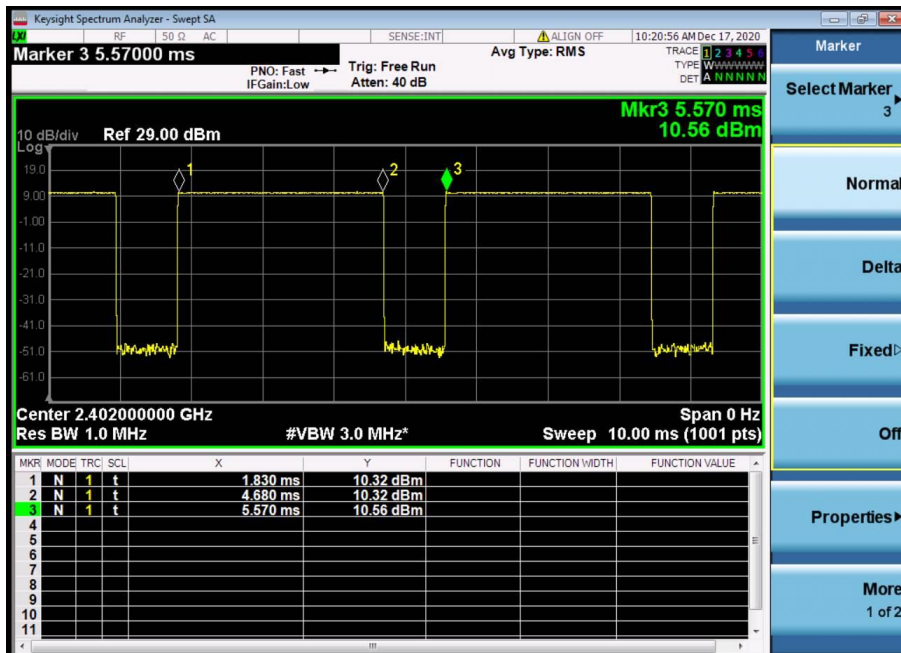

7.2.5 LTE Test Configuration

LTE modes were tested according to FCC KDB 941225 D05 publication. Please see notes after the tabulated SAR data for required test configurations. Establishing connections with base station simulators ensure a consistent means for testing SAR and are recommended for evaluating SAR [4]. The R&S CMW500 was used for LTE output power measurements and SAR testing. Max power control was used so the UE transmits with maximum output power during SAR testing. SAR must be measured with the maximum TTI (transmit time interval) supported by the device in each LTE configuration.

TDD LTE test consideration

For Time-Division Duplex (TDD) systems, SAR must be tested using a fixed periodic duty factor according to the highest transmission duty factor implemented for the device and supported by the defined 3GPP LTE TDD configurations.

SAR was tested with the highest transmission duty factor (63.33%) using Uplink-downlink configuration 0 and Special subframe configuration 7.

LTE TDD Band support 3GPP TS 36.211 section 4.2 for Type 2 Frame Structure and Table 4.2-2 for uplink-downlink configurations and Table 4.2-1 for Special subframe configurations.

Frame structure type 2:

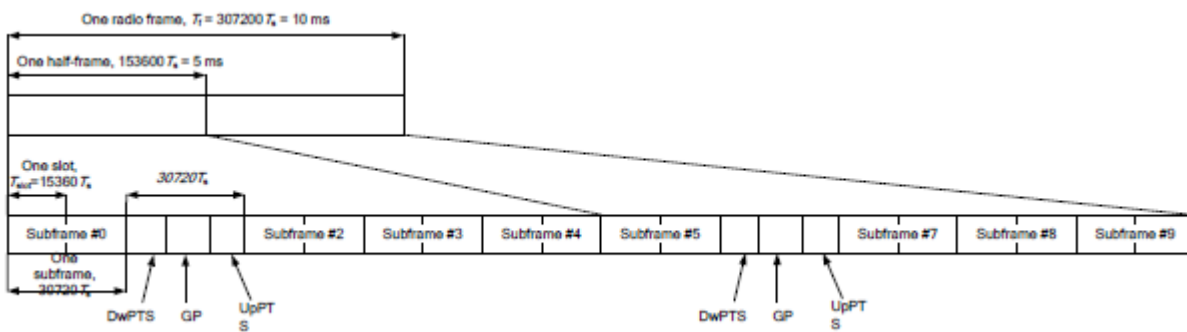


Table 4.2-1: Configuration of special subframe (lengths of DwPTS/GP/UpPTS).

Special subframe configuration	Normal cyclic prefix in downlink			Extended cyclic prefix in downlink				
	DwPTS	UpPTS		DwPTS	UpPTS			
		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink		
0	6592.Ts	2192.Ts	2560.Ts	7680.Ts	2192.Ts	2560.Ts		
1	19760.Ts			20480.Ts				
2	21952.Ts			23040.Ts				
3	24144.Ts			25600.Ts				
4	26336.Ts			7680.Ts				
5	6592.Ts	4384.Ts	5120.Ts	20480.Ts	4384.Ts	5120.Ts		
6	19760.Ts			23040.Ts				
7	21952.Ts			25600.Ts				
8	24144.Ts			-			-	-
9	13168.Ts			-			-	-

Table 4.2-2: Uplink-downlink configurations.

Uplink-downlink configuration	Downlink-to-Uplink Switch-point periodicity	Subframe number									
		0	1	2	3	4	5	6	7	8	9
0	5 ms	D	S	U	U	U	D	S	U	U	U
1	5 ms	D	S	U	U	D	D	S	U	U	D
2	5 ms	D	S	U	D	D	D	S	U	D	D
3	10 ms	D	S	U	U	U	D	D	D	D	D
4	10 ms	D	S	U	U	D	D	D	D	D	D
5	10 ms	D	S	U	D	D	D	D	D	D	D
6	5 ms	D	S	U	U	U	D	S	U	U	D

Calculated Duty Cycle=[Extended cyclic prefix in uplink x (Ts) x # of S + # of U]/10ms

Uplink-Downlink Configuration	Downlink-to-Uplink Switch-point Periodicity	Subframe Number										Calculated Duty Cycle (%)
		0	1	2	3	4	5	6	7	8	9	
0	5 ms	D	S	U	U	U	D	S	U	U	U	63.33
1	5 ms	D	S	U	U	D	D	S	U	U	D	43.33
2	5 ms	D	S	U	D	D	D	S	U	D	D	23.33
3	10 ms	D	S	U	U	U	D	D	D	D	D	31.67
4	10 ms	D	S	U	U	D	D	D	D	D	D	21.67
5	10 ms	D	S	U	D	D	D	D	D	D	D	11.67
6	5 ms	D	S	U	U	U	D	S	U	U	D	53.33

A) Spectrum Plots for RB Configurations

A properly configured base station simulator was used for SAR tests and power measurements. Therefore, spectrum plots for RB configurations were not required to be included in this report.

B) MPR

MPR is permanently implemented for this device by the manufacturer. The specific manufacturer target MPR is indicated alongside the SAR results. MPR is enabled for this device, according to 3GPP TS36.101 V13.5.0 (201609) Section 6.2.3 – 6.2.5 under Table 6.2.3-1.

Modulation	Channel bandwidth / Transmission bandwidth (N _{RB})						MPR (dB)
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2

C) A-MPR

A-MPR (Additional MPR) has been disabled for all SAR tests by setting NS=01 on the base station simulator.

D) Largest channel bandwidth standalone SAR test requirements

1) QPSK with 1 RB allocation

Start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel. When the reported SAR is ≤ 0.8 W/kg, testing of the remaining RB offset configurations and required test channels is not required for 1 RB allocation; otherwise, SAR is required for the remaining required test channels and only for the RB offset configuration with the highest

output power for that channel. When the reported SAR of a required test channel is > 1.45 W/kg, SAR is required for all three RB offset configurations for that required test channel.

2) QPSK with 50% RB allocation

The procedures required for 1 RB allocation in 1) are applied to measure the SAR for QPSK with 50% RB allocation.

3) QPSK with 100% RB allocation

For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation in 1) and 2) are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.

4) Higher order modulations

For each modulation besides QPSK; e.g., 16-QAM, 64-QAM, apply the QPSK procedures in above sections to determine the QAM configurations that may need SAR measurement. For each configuration identified as required for testing, SAR is required only when the highest maximum output power for the configuration in the higher order modulation is $> \frac{1}{2}$ dB higher than the same configuration in QPSK or when the reported SAR for the QPSK configuration is > 1.45 W/kg.

E) Other channel bandwidth standalone SAR test requirements

For the other channel bandwidths used by the device in a frequency band, apply all the procedures required for the largest channel bandwidth in section A) to determine the channels and RB configurations that need SAR testing and only measure SAR when the highest maximum output power of a configuration requiring testing in the smaller channel bandwidth is $> \frac{1}{2}$ dB higher than the equivalent channel configurations in the largest channel bandwidth configuration or the reported SAR of a configuration for the largest channel bandwidth is > 1.45 W/kg..

8 Test Result

8.1 Measurement of RF Conducted Power

8.1.1 Conducted Power Of GSM

GSM 850										
Burst Output Power(dBm)					Tune up	Division Factors	Frame-Average Output Power(dBm)			Tune up
Channel		128	190	251			128	190	251	
GSM(GMSK)	GSM	30.75	30.91	31.05	31.5	-9.19	21.56	21.72	21.86	22.31
GPRS/ EGPRS (GMSK)	1 TX Slot	30.72	30.86	31	31.5	-9.19	21.53	21.67	21.81	22.31
	2 TX Slots	29.91	30.07	30.2	30.5	-6.18	23.73	23.89	24.02	24.32
	3 TX Slots	28.07	28.21	28.33	28.5	-4.42	23.65	23.79	23.91	24.08
	4 TX Slots	26.87	27	27.11	27.5	-3.17	23.7	23.83	23.94	24.33
EGPRS (8PSK)	1 TX Slot	26.7	26.48	26.23	27	-9.19	17.51	17.29	17.04	17.81
	2 TX Slots	25.83	25.71	25.41	26	-6.18	19.65	19.53	19.23	19.82
	3 TX Slots	23.85	23.72	23.47	24	-4.42	19.43	19.3	19.05	19.58
	4 TX Slots	22.59	22.48	22.07	23	-3.17	19.42	19.31	18.9	19.83
GSM 1900										
Burst Output Power(dBm)					Tune up	Division Factors	Frame-Average Output Power(dBm)			Tune up
Channel		512	661	810			512	661	810	
GSM(GMSK)	GSM	29.3	29.2	29.01	29.5	-9.19	20.11	20.01	19.82	20.31
GPRS/ EGPRS (GMSK)	1 TX Slot	29.26	29.11	28.92	29.5	-9.19	20.07	19.92	19.73	20.31
	2 TX Slots	28.32	28.23	28.08	28.5	-6.18	22.14	22.05	21.9	22.32
	3 TX Slots	26.27	26.17	26.03	26.5	-4.42	21.85	21.75	21.61	22.08
	4 TX Slots	25.12	25.01	24.89	25.5	-3.17	21.95	21.84	21.72	22.33
EGPRS (8PSK)	1 TX Slot	25.95	25.64	25.29	26	-9.19	16.76	16.45	16.1	16.81
	2 TX Slots	25.03	24.76	24.49	25.5	-6.18	18.85	18.58	18.31	19.32
	3 TX Slots	23.15	22.96	22.63	23.5	-4.42	18.73	18.54	18.21	19.08
	4 TX Slots	22.15	21.95	21.69	22.5	-3.17	18.98	18.78	18.52	19.33

Table 10: Conducted Power Of GSM

Note:

1) CMW500 measures GSM peak and average output power for active timeslots. For SAR the time based average power is relevant. The difference in between depends on the duty cycle of the TDMA signal:

No. of timeslots	1	2	3	4
Duty Cycle	1:8.3	1:4.15	1:2.77	1:2.075
Time based avg. power compared to slotted avg. power	-9.19	-6.18	-4.42	-3.17

2) The frame-averaged power is linearly proportion to the slot number configured and it is linearly scaled the maximum burst-averaged power based on time slots.

8.1.2 Conducted Power Of WCDMA

WCDMA Band II					
Average Conducted Power(dBm)					
Channel		9262	9400	9538	Tune up
WCDMA	12.2kbps RMC	22.25	22.24	22.27	22.5
HSDPA	Subtest 1	18.84	17.84	18.15	19
	Subtest 2	18.36	18.02	18.07	19
	Subtest 3	17.87	18.17	18.04	19
	Subtest 4	18.16	17.86	17.71	19
HSUPA	Subtest 1	17.93	18.7	18.23	19
	Subtest 2	18.14	18.67	18.18	19
	Subtest 3	17.92	17.98	17.55	19
	Subtest 4	17.91	18.48	18.54	19
	Subtest 5	17.79	18.13	17.7	19
WCDMA Band V					
Average Conducted Power(dBm)					
Channel		4132	4182	4233	Tune up
WCDMA	12.2kbps RMC	22.37	22.37	22.48	22.5
HSDPA	Subtest 1	18.21	18.2	18.66	19
	Subtest 2	18.15	18.04	18.47	19
	Subtest 3	18.18	17.74	18.07	19
	Subtest 4	17.91	17.81	17.8	19
HSUPA	Subtest 1	18.22	17.99	17.83	19
	Subtest 2	17.85	18.71	18.43	19
	Subtest 3	18.05	18.12	18.17	19
	Subtest 4	18.27	18.16	18.19	19
	Subtest 5	18.65	16.94	18.09	19
WCDMA Band IV					
Average Conducted Power(dBm)					
Channel		1312	1412	1513	Tune up
WCDMA	12.2kbps RMC	22.56	22.41	22.14	23
HSDPA	Subtest 1	17.66	17.96	18.22	19
	Subtest 2	18.62	18.31	18.45	19
	Subtest 3	17.93	18.12	17.88	19
	Subtest 4	17.82	18.11	17.81	19
HSUPA	Subtest 1	18.06	18.65	18.13	19
	Subtest 2	18.32	18.3	17.57	19
	Subtest 3	19.01	19.01	18.13	19.5
	Subtest 4	18.44	18.7	17.97	19
	Subtest 5	17.61	18.45	18.39	19

Table 11: Conducted Power Of WCDMA

8.1.3 Conducted Power Of LTE

LTE Band 2				Conducted Power(dBm)				
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up	
				18607	18900	19193		
1.4MHz	QPSK	1	0	23.04	23.02	23.06	23.5	
		1	2	23.17	23.17	23.17	23.5	
		1	5	23.02	23.02	23.03	23.5	
		3	0	23.1	23.1	23.14	23.5	
		3	2	23.13	23.12	23.19	23.5	
		3	3	23.13	23.1	23.14	23.5	
	16QAM	6	0	22.12	22.09	22.16	22.5	
		1	0	21.9	22.17	22.1	22.5	
		1	2	22.1	22.37	22.23	22.5	
		1	5	21.91	22.15	22.09	22.5	
		3	0	21.91	22.01	21.99	22.5	
		3	2	21.9	21.98	22.03	22.5	
	3MHz	QPSK	3	3	21.86	21.98	21.98	22.5
			6	0	21.08	21.09	21	21.5
1			0	23.12	23.02	23.08	23.5	
1			7	23.31	23.24	23.33	23.5	
1			14	23.06	23.02	23.08	23.5	
8			0	22.12	22.11	22.15	22.5	
16QAM		8	4	22.15	22.12	22.19	22.5	
		8	7	22.15	22.09	22.14	22.5	
		15	0	22.08	22.07	22.09	22.5	
		1	0	21.95	22.23	22.22	22.5	
		1	7	22.23	22.42	22.38	22.5	
		1	14	21.94	22.15	22.15	22.5	
		8	0	21.13	21.15	21.12	21.5	
		8	4	21.14	21.19	21.15	21.5	
5MHz	QPSK	8	7	21.11	21.14	21.1	21.5	
		15	0	20.98	21.08	21.02	21.5	
		1	0	23.05	23.01	23	23.5	
		1	13	23.18	23.12	23.15	23.5	
		1	24	23.04	23	23.02	23.5	
		12	0	22.03	22.11	22.16	22.5	
	16QAM	12	6	22.13	22.12	22.14	22.5	
		12	13	22.11	22.09	22.08	22.5	
		25	0	22.06	22.09	22.1	22.5	
		1	0	22.16	22.04	22.16	22.5	
		1	13	22.23	22.11	22.26	22.5	
		1	24	22.07	22.03	22.12	22.5	
		12	0	21.05	21.11	21.15	21.5	
		12	6	21.12	21.1	21.17	21.5	
		12	13	21.09	21.01	21.09	21.5	

Bandwidth	Modulation	25	0	21.15	21.11	21.06	21.5
		RB size	RB offset	Channel	Channel	Channel	Tune up
10MHz	QPSK	1	0	23.12	23.06	23.07	23.5
		1	25	23.2	23.13	23.21	23.5
		1	49	23.06	23	23.05	23.5
		25	0	22.07	22.19	22.21	22.5
		25	13	22.13	22.17	22.16	22.5
		25	25	22.16	22.15	22.12	22.5
		50	0	22.08	22.16	22.14	22.5
	16QAM	1	0	22.04	22.23	22.22	22.5
		1	25	22.1	22.31	22.33	22.5
		1	49	21.93	22.17	22.14	22.5
		25	0	21.11	21.17	21.23	21.5
		25	13	21.15	21.14	21.18	21.5
		25	25	21.14	21.15	21.11	21.5
		50	0	21.06	21.15	21.12	21.5
15MHz	QPSK	1	0	23.07	23	23.04	23.5
		1	38	23.12	23.08	23.1	23.5
		1	74	22.92	22.85	22.99	23.5
		36	0	22.15	22.21	22.25	22.5
		36	18	22.22	22.2	22.25	22.5
		36	39	22.18	22.16	22.19	22.5
		75	0	22.18	22.21	22.25	22.5
	16QAM	1	0	21.94	22.15	22.26	22.5
		1	38	21.99	22.22	22.32	22.5
		1	74	21.8	22.01	22.14	22.5
		36	0	21.04	21.13	21.23	21.5
		36	18	21.08	21.12	21.22	21.5
		36	39	21.04	21.08	21.14	21.5
		75	0	21.09	21.1	21.18	21.5
20MHz	QPSK	1	0	22.74	22.91	22.89	23.5
		1	50	23.13	23.35	23.24	23.5
		1	99	22.63	22.77	22.86	23.5
		50	0	21.99	22.17	22.14	22.5
		50	25	22.1	22.13	22.15	22.5
		50	50	22	22.06	21.96	22.5
		100	0	22.01	22.1	22.06	22.5
	16QAM	1	0	21.88	22.02	21.92	22.5
		1	50	22.22	22.37	22.28	22.5
		1	99	21.8	21.86	21.84	22.5
		50	0	21.03	21.15	21.17	21.5
		50	25	21.12	21.11	21.16	21.5
		50	50	21.06	21.06	21.01	21.5
		100	0	21	21.11	21.03	21.5

LTE Band 4				Conducted Power(dBm)			
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				19957	20175	20393	
1.4MHz	QPSK	1	0	22.7	22.79	22.57	23.5
		1	2	22.9	22.96	22.76	23.5
		1	5	22.68	22.74	22.57	23.5
		3	0	22.79	22.77	22.63	23.5
		3	2	22.82	22.8	22.62	23.5
		3	3	22.76	22.76	22.58	23.5
		6	0	21.81	21.73	21.55	22.5
	16QAM	1	0	22.05	21.74	21.39	22.5
		1	2	22	21.74	21.56	22.5
		1	5	21.81	21.57	21.39	22.5
		3	0	21.79	21.89	21.6	22.5
		3	2	21.84	21.94	21.62	22.5
		3	3	21.82	21.91	21.58	22.5
		6	0	20.73	20.75	20.56	21.5
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
3MHz	QPSK	1	0	22.79	22.77	22.58	23.5
		1	7	23.02	23	22.85	23.5
		1	14	22.74	22.8	22.54	23.5
		8	0	21.78	21.75	21.58	22.5
		8	4	21.81	21.76	21.6	22.5
		8	7	21.78	21.73	21.59	22.5
		15	0	21.75	21.72	21.55	22.5
	16QAM	1	0	21.91	21.59	21.7	22.5
		1	7	22.22	21.88	21.99	22.5
		1	14	21.88	21.59	21.62	22.5
		8	0	20.8	20.76	20.64	21.5
		8	4	20.83	20.81	20.63	21.5
		8	7	20.81	20.77	20.7	21.5
		15	0	20.77	20.74	20.54	21.5
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
5MHz	QPSK	1	0	22.68	22.54	22.5	23.5
		1	13	22.8	22.67	22.57	23.5
		1	24	22.64	22.51	22.45	23.5
		12	0	21.76	21.72	21.55	22.5
		12	6	21.82	21.76	21.63	22.5
		12	13	21.76	21.64	21.64	22.5
		25	0	21.79	21.68	21.6	22.5
	16QAM	1	0	22.26	21.91	21.65	22.5
		1	13	22.01	21.9	21.75	22.5
		1	24	21.86	21.78	21.56	22.5
		12	0	20.78	20.77	20.48	21.5
		12	6	20.85	20.87	20.59	21.5
		12	13	20.83	20.7	20.58	21.5
		25	0	20.9	20.77	20.6	21.5

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				20000	20175	20350	
10MHz	QPSK	1	0	22.75	22.71	22.7	23.5
		1	25	22.96	22.8	22.71	23.5
		1	49	22.71	22.62	22.56	23.5
		25	0	21.76	21.81	21.6	22.5
		25	13	21.76	21.72	21.59	22.5
		25	25	21.87	21.67	21.65	22.5
		50	0	21.8	21.74	21.6	22.5
	16QAM	1	0	22.19	22.07	21.5	22.5
		1	25	21.91	22.09	21.57	22.5
		1	49	21.84	21.8	21.37	22.5
		25	0	20.9	20.88	20.59	21.5
		25	13	21.02	20.79	20.59	21.5
		25	25	21.15	20.81	20.69	21.5
		50	0	20.87	20.83	20.62	21.5
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				20025	20175	20325	
15MHz	QPSK	1	0	22.77	22.65	22.62	23.5
		1	38	22.83	22.7	22.62	23.5
		1	74	22.61	22.5	22.37	23.5
		36	0	21.82	21.86	21.74	22.5
		36	18	21.87	21.82	21.72	22.5
		36	39	21.88	21.72	21.71	22.5
		75	0	21.85	21.84	21.76	22.5
	16QAM	1	0	22.23	22.15	21.77	22.5
		1	38	22.28	22.14	21.83	22.5
		1	74	22.1	21.62	21.63	22.5
		36	0	21.13	20.89	20.83	21.5
		36	18	21.16	21.01	20.75	21.5
		36	39	21.3	20.81	20.69	21.5
		75	0	21.27	20.99	20.76	21.5
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				20050	20175	20300	
20MHz	QPSK	1	0	22.58	22.44	22.41	23.5
		1	50	23.01	22.83	22.79	23.5
		1	99	22.44	22.33	22.19	23.5
		50	0	21.81	21.62	21.71	22.5
		50	25	21.75	21.74	21.69	22.5
		50	50	21.74	21.61	21.69	22.5
		100	0	21.74	21.72	21.68	22.5
	16QAM	1	0	21.49	21.54	21.18	22.5
		1	50	21.89	21.93	21.64	22.5
		1	99	21.31	21.46	21	22.5
		50	0	20.85	20.83	20.74	21.5
		50	25	21.06	20.85	20.75	21.5
		50	50	20.9	20.66	20.77	21.5
		100	0	20.98	20.75	20.76	21.5

LTE Band 5	Conducted Power(dBm)
-------------------	-----------------------------

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up		
				20407	20525	20643			
1.4MHz	QPSK	1	0	22.47	22.38	22.3	23.5		
		1	2	22.6	22.53	22.43	23.5		
		1	5	22.46	22.39	22.24	23.5		
		3	0	22.43	22.45	22.38	23.5		
		3	2	22.46	22.46	22.4	23.5		
		3	3	22.42	22.43	22.31	23.5		
	16QAM	6	0	21.37	21.35	21.32	22.5		
		1	0	21.29	21.24	21.43	22.5		
		1	2	21.47	21.37	21.53	22.5		
		1	5	21.32	21.21	21.44	22.5		
		3	0	21.55	21.4	21.44	22.5		
		3	2	21.6	21.42	21.45	22.5		
		3	3	21.55	21.38	21.44	22.5		
		6	0	20.41	20.34	20.3	21.5		
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up		
				20415	20525	20635			
3MHz	QPSK	1	0	22.46	22.41	22.46	23.5		
		1	7	22.77	22.59	22.75	23.5		
		1	14	22.47	22.37	22.32	23.5		
		8	0	21.43	21.42	21.4	22.5		
		8	4	21.48	21.41	21.42	22.5		
		8	7	21.42	21.4	21.38	22.5		
		15	0	21.35	21.36	21.39	22.5		
	16QAM	1	0	21.3	21.57	21.63	22.5		
		1	7	21.57	21.82	21.84	22.5		
		1	14	21.29	21.47	21.49	22.5		
		8	0	20.43	20.38	20.41	21.5		
		8	4	20.49	20.41	20.44	21.5		
		8	7	20.41	20.38	20.38	21.5		
		15	0	20.35	20.28	20.32	21.5		
		Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
						20425	20525	20625	
5MHz	QPSK	1	0	22.27	22.33	22.31	23.5		
		1	13	22.34	22.38	22.4	23.5		
		1	24	22.24	22.29	22.22	23.5		
		12	0	21.36	21.44	21.46	22.5		
		12	6	21.46	21.47	21.47	22.5		
		12	13	21.31	21.39	21.38	22.5		
		25	0	21.4	21.4	21.47	22.5		
	16QAM	1	0	21.77	21.5	21.52	22.5		
		1	13	21.63	21.54	21.64	22.5		
		1	24	21.5	21.41	21.44	22.5		
		12	0	20.41	20.32	20.47	21.5		
		12	6	20.47	20.39	20.45	21.5		
		12	13	20.3	20.28	20.33	21.5		
		25	0	20.42	20.38	20.5	21.5		
		Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up

				20450	20525	20600	
10MHz	QPSK	1	0	22.51	22.45	22.45	23.5
		1	25	22.58	22.5	22.58	23.5
		1	49	22.41	22.37	22.32	23.5
		25	0	21.52	21.47	21.58	22.5
		25	13	21.42	21.45	21.45	22.5
		25	25	21.39	21.43	21.41	22.5
		50	0	21.45	21.46	21.47	22.5
	16QAM	1	0	21.81	21.53	21.66	22.5
		1	25	21.7	21.65	21.74	22.5
		1	49	21.39	21.5	21.51	22.5
		25	0	20.56	20.49	20.63	21.5
		25	13	20.44	20.48	20.54	21.5
		25	25	20.38	20.46	20.45	21.5
		50	0	20.47	20.41	20.5	21.5

LTE Band 7				Conducted Power(dBm)			
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				20775	21100	21425	
5MHz	QPSK	1	0	22.1	22.04	21.96	22.5
		1	13	22.23	22.16	22.08	22.5
		1	24	22.13	22.03	22.01	22.5
		12	0	21.12	21.04	21.01	21.5
		12	6	21.21	21.08	21.04	21.5
		12	13	21.15	21.03	21.03	21.5
		25	0	21.15	21.05	21.01	21.5
	16QAM	1	0	21.22	21.4	21.15	21.5
		1	13	21.33	21.49	21.27	21.5
		1	24	21.27	21.38	21.15	21.5
		12	0	20.02	20.11	20.13	20.5
		12	6	20.08	20.15	20.16	20.5
		12	13	20.07	20.09	20.16	20.5
		25	0	20.13	20.13	20.17	20.5
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				20800	21100	21400	
10MHz	QPSK	1	0	22.2	22.09	22.01	22.5
		1	25	22.4	22.23	22.16	22.5
		1	49	22.2	22.02	22.03	22.5
		25	0	21.16	21.1	21.01	21.5
		25	13	21.21	21.1	21.07	21.5
		25	25	21.25	21.07	21.11	21.5
		50	0	21.2	21.08	21.06	21.5
	16QAM	1	0	21.17	21.1	21.14	21.5
		1	25	21.39	21.24	21.28	21.5
		1	49	21.15	21.04	21.11	21.5
		25	0	20.18	20.18	20.01	20.5
		25	13	20.23	20.2	20.07	20.5
		25	25	20.24	20.18	20.1	20.5

Bandwidth	Modulation	50	0	20.16	20.12	20.1	20.5
		RB size	RB offset	Channel	Channel	Channel	Tune up
15MHz	QPSK	1	0	22.17	22.04	21.96	22.5
		1	38	22.26	22.06	22.04	22.5
		1	74	22.08	21.88	21.94	22.5
		36	0	21.2	21.15	21.1	21.5
		36	18	21.24	21.12	21.11	21.5
		36	39	21.21	21.09	21.11	21.5
		75	0	21.23	21.1	21.1	21.5
	16QAM	1	0	21.14	21.16	21.1	21.5
		1	38	21.27	21.19	21.19	21.5
		1	74	21.09	20.97	21.03	21.5
		36	0	20.2	20.16	20.16	20.5
		36	18	20.25	20.12	20.16	20.5
		36	39	20.17	20.1	20.17	20.5
		75	0	20.24	20.11	20.14	20.5
Bandwidth	Modulation	RB size	RB offset	20.85	20.85	20.85	Tune up
				Channel	Channel	Channel	
20MHz	QPSK	1	0	21.87	21.88	21.73	22.5
		1	50	22.31	22.24	22.14	22.5
		1	99	21.83	21.71	21.7	22.5
		50	0	21.15	21.06	21.09	21.5
		50	25	21.09	21.08	21.05	21.5
		50	50	21.15	21.02	21.03	21.5
		100	0	21.11	21.07	21.06	21.5
	16QAM	1	0	21.02	20.76	20.96	21.5
		1	50	21.43	21.13	21.32	21.5
		1	99	20.97	20.63	20.9	21.5
		50	0	20.12	20.14	20.16	20.5
		50	25	20.17	20.15	20.11	20.5
		50	50	20.1	20.11	20.11	20.5
		100	0	20.08	20.11	20.19	20.5

LTE FDD Band 12				Conducted Power(dBm)			
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				23017	23095	23173	
1.4MHz	QPSK	1	0	22.15	22.12	22.17	23
		1	2	22.23	22.21	22.29	23
		1	5	22.11	22.11	22.17	23
		3	0	22.18	22.2	22.21	23
		3	2	22.2	22.2	22.23	23
		3	3	22.15	22.15	22.21	23
	16QAM	6	0	21.22	21.21	21.26	22
		1	0	21.08	21.14	21.12	22
		1	2	21.15	21.29	21.21	22
		1	5	21.05	21.13	21.16	22
		3	0	21.27	21.26	21.2	22

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				23025	23095	23165	
3MHz	QPSK	3	2	21.34	21.23	21.21	22
		3	3	21.3	21.21	21.19	22
		6	0	20.21	20.17	20.16	21
		1	0	22.28	22.15	22.24	23
		1	7	22.39	22.33	22.35	23
		1	14	22.22	22.18	22.19	23
		8	0	21.2	21.16	21.27	22
	16QAM	8	4	21.21	21.27	21.27	22
		8	7	21.17	21.21	21.19	22
		15	0	21.14	21.15	21.21	22
		1	0	21.18	21.31	21.66	22
		1	7	21.31	21.46	21.8	22
		1	14	21.2	21.28	21.6	22
		8	0	20.25	20.17	20.42	21
		8	4	20.3	20.23	20.4	21
5MHz	QPSK	8	7	20.24	20.18	20.38	21
		15	0	20.21	20.14	20.3	21
		1	0	22.24	22.09	22.08	23
		1	13	22.22	22.2	22.21	23
		1	24	22.09	22.03	22.09	23
		12	0	21.1	21.07	21.27	22
		12	6	21.19	21.17	21.24	22
	16QAM	12	13	21.06	21.17	21.13	22
		25	0	21.1	21.14	21.16	22
		1	0	21.12	21.33	20.91	22
		1	13	21.3	21.4	21.02	22
		1	24	21.16	21.24	20.92	22
		12	0	20.14	20.13	20.23	21
		12	6	20.21	20.2	20.22	21
		12	13	20.06	20.19	20.09	21
10MHz	QPSK	25	0	20.15	20.15	20.19	21
		1	0	22.23	22.13	22.15	23
		1	25	22.31	22.27	22.26	23
		1	49	22.18	22.11	22.11	23
		25	0	21.25	21.16	21.06	22
		25	13	21.17	21.16	21.11	22
		25	25	21.24	21.15	20.97	22
	16QAM	50	0	21.22	21.18	21.03	22
		1	0	21.15	21.3	21.63	22
		1	25	21.32	21.42	21.7	22
		1	49	21.1	21.21	21.58	22
		25	0	20.33	20.22	20.12	21
		25	13	20.28	20.18	20.2	21
		25	25	20.32	20.21	20.06	21

		50	0	20.29	20.19	20.08	21
--	--	----	---	-------	-------	-------	----

LTE FDD Band 17				Conducted Power(dBm)			
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				23755	23790	23825	
5MHz	QPSK	1	0	21.52	21.6	21.51	22.5
		1	13	21.62	21.62	21.61	22.5
		1	24	21.47	21.45	21.47	22.5
		12	0	20.6	20.59	20.69	21.5
		12	6	20.72	20.81	20.67	21.5
		12	13	20.74	20.6	20.54	21.5
		25	0	20.73	20.62	20.6	21.5
	16QAM	1	0	20.82	21.05	20.83	21.5
		1	13	20.92	20.98	21	21.5
		1	24	20.79	20.77	20.79	21.5
		12	0	20.06	19.94	19.77	20.5
		12	6	20.09	20.08	19.87	20.5
		12	13	20.1	19.97	19.69	20.5
		25	0	20.12	20	19.66	20.5
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				23780	23790	23800	
10MHz	QPSK	1	0	21.76	21.76	21.73	22.5
		1	25	22.03	21.84	21.77	22.5
		1	49	21.68	21.48	21.5	22.5
		25	0	20.84	20.6	20.64	21.5
		25	13	20.97	20.91	20.71	21.5
		25	25	20.89	20.81	20.59	21.5
		50	0	20.93	20.83	20.82	21.5
	16QAM	1	0	21.03	21.21	21.27	21.5
		1	25	21.22	21.34	21.35	21.5
		1	49	21.02	21.04	21.03	21.5
		25	0	20.13	20.01	20.08	20.5
		25	13	20.18	20.09	20.13	20.5
		25	25	20.06	19.95	19.95	20.5
		50	0	20.02	19.99	19.99	20.5

LTE Band 25				Conducted Power(dBm)			
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				26047	26365	26683	
1.4MHz	QPSK	1	0	21.81	22.19	21.84	23
		1	2	21.95	22.31	21.84	23
		1	5	21.8	22.18	21.73	23
		3	0	21.88	22.29	21.7	22
		3	2	21.9	22.32	21.71	22
		3	3	21.89	22.12	21.65	22
		6	0	20.84	21.27	20.74	22
	16QAM	1	0	21.28	20.9	20.49	22

		1	2	21.22	20.98	20.6	22
		1	5	20.9	20.82	20.48	22
		3	0	21	20.75	20.74	21
		3	2	20.92	20.76	20.8	21
		3	3	20.9	20.8	20.74	21
		6	0	19.78	19.79	19.64	21
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				26055	26365	26675	
3MHz	QPSK	1	0	21.79	21.74	21.58	23
		1	7	21.91	21.84	21.75	23
		1	14	21.74	21.66	21.68	23
		8	0	20.75	20.7	20.64	22
		8	4	20.8	20.71	20.67	22
		8	7	20.79	20.67	20.58	22
	16QAM	15	0	20.75	20.67	20.57	22
		1	0	21.78	21.09	20.71	22
		1	7	21.87	21.1	20.85	22
		1	14	21.65	20.88	20.69	22
		8	0	20.41	20.17	19.59	21
		8	4	20.45	20.24	19.6	21
		8	7	20.41	20.16	19.52	21
		15	0	20.31	20.09	19.51	21
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				26065	26365	26665	
5MHz	QPSK	1	0	21.72	21.64	21.51	23
		1	13	21.81	21.7	21.66	23
		1	24	21.65	21.62	21.58	23
		12	0	20.72	20.62	20.62	22
		12	6	20.84	20.7	20.74	22
		12	13	20.9	20.72	21.19	22
	16QAM	25	0	20.84	20.73	21.28	22
		1	0	21.04	21.03	20.73	22
		1	13	21.1	21.01	20.81	22
		1	24	20.97	20.73	20.65	22
		12	0	20.15	19.92	19.65	21
		12	6	20.24	20.12	19.66	21
		12	13	20.27	20.12	19.46	21
		25	0	20.27	20.14	19.53	21
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				26090	26365	26640	
10MHz	QPSK	1	0	22.38	22.37	22.3	23
		1	25	22.49	22.47	22.45	23
		1	49	22.29	22.36	22.4	23
		25	0	21.28	21.36	21.44	22
		25	13	21.38	21.35	21.33	22
		25	25	21.33	21.37	21.2	22

		50	0	21.36	21.4	21.36	22	
	16QAM	1	0	22.33	21.84	21.53	22	
		1	25	22.36	21.65	21.56	22	
		1	49	22.18	21.42	21.37	22	
		25	0	20.82	20.87	20.41	21	
		25	13	20.87	20.92	20.33	21	
		25	25	20.85	20.9	20.21	21	
		50	0	20.83	20.87	20.33	21	
Bandwidth		Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				26115	26365	26615		
15MHz	QPSK	1	0	22.32	22.17	22.03	23	
		1	38	22.32	22.19	22.07	23	
		1	74	22.16	22.04	22.12	23	
		36	0	21.25	21.29	21.18	22	
		36	18	21.39	21.26	21.15	22	
		36	39	21.37	21.3	21.12	22	
		75	0	21.3	21.33	21.16	22	
		16QAM	1	0	22.24	21.97	21.41	22
	1		38	22.22	21.77	21.41	22	
	1		74	22.01	21.59	21.27	22	
	36		0	20.78	20.75	20.34	21	
	36		18	20.87	20.74	20.33	21	
	36		39	20.83	20.76	20.24	21	
	75		0	20.82	20.8	20.31	21	
	Bandwidth		Modulation	RB size	RB offset	Channel	Channel	Channel
					26140	26365	26590	
20MHz	QPSK	1	0	22.09	22	21.91	23	
		1	50	22.34	22.42	22.21	23	
		1	99	21.91	21.87	21.83	23	
		50	0	21.09	21.25	21.24	22	
		50	25	21.21	21.25	21.11	22	
		50	50	21.04	21.24	20.94	22	
		100	0	21.07	21.28	21.12	22	
		16QAM	1	0	21.27	21.28	21.4	22
	1		50	21.45	21.62	21.75	22	
	1		99	21.07	21.07	21.21	22	
	50		0	20.1	20.26	20.26	21	
	50		25	20.2	20.28	20.14	21	
	50		50	20.06	20.26	19.97	21	
	100		0	20.07	20.3	20.15	21	

LTE FDD Band 26				Conducted Power(dBm)			
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				26697	26865	27033	
1.4MHz	QPSK	1	0	22.8	22.24	22.26	24
		1	2	22.84	22.32	22.29	24
		1	5	22.81	22.22	22.22	24

		3	0	22.93	22.35	22.4	24
		3	2	22.92	22.39	22.39	24
		3	3	22.9	22.33	22.34	24
		6	0	21.82	21.3	21.3	23
	16QAM	1	0	21.79	21.93	21.62	23
		1	2	21.9	22.05	21.35	23
		1	5	21.84	21.89	21.22	23
		3	0	21.92	21.87	21.59	23
		3	2	21.92	21.89	21.59	23
		3	3	21.91	21.87	21.56	23
		6	0	20.77	20.78	20.33	22
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				26705	26865	27025	
3MHz	QPSK	1	0	22.89	22.38	22.3	24
		1	7	22.95	22.43	22.44	24
		1	14	22.76	22.32	22.25	24
		8	0	21.83	21.3	21.34	23
		8	4	21.86	21.3	21.37	23
		8	7	21.84	21.29	21.3	23
		15	0	21.81	21.33	21.34	23
	16QAM	1	0	22.38	21.48	21.51	23
		1	7	22.5	21.45	21.65	23
		1	14	22.36	21.32	21.45	23
		8	0	21	20.37	20.35	22
		8	4	21.04	20.4	20.37	22
		8	7	20.99	20.4	20.3	22
		15	0	20.93	20.39	20.34	22
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				26715	26865	27015	
5MHz	QPSK	1	0	22.78	22.23	22.23	24
		1	13	22.85	22.29	22.34	24
		1	24	22.79	22.27	22.2	24
		12	0	21.81	21.32	21.41	23
		12	6	21.88	21.37	21.35	23
		12	13	21.84	21.27	21.31	23
		25	0	21.85	21.34	21.38	23
	16QAM	1	0	21.87	21.67	21.58	23
		1	13	22	21.49	21.63	23
		1	24	21.9	21.34	21.5	23
		12	0	20.8	20.34	20.48	22
		12	6	20.88	20.36	20.43	22
		12	13	20.85	20.28	20.38	22
		25	0	20.91	20.39	20.41	22
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				26740	26865	26990	
10MHz	QPSK	1	0	22.88	22.36	22.28	24

		1	25	23.02	22.4	22.4	24
		1	49	22.82	22.23	22.23	24
		25	0	21.81	21.36	21.46	23
		25	13	21.88	21.36	21.34	23
		25	25	21.88	21.3	21.28	23
		50	0	21.84	21.34	21.37	23
	16QAM	1	0	21.91	21.55	21.48	23
		1	25	21.95	21.46	21.58	23
		1	49	21.83	21.25	21.48	23
		25	0	20.91	20.46	20.49	22
		25	13	20.98	20.47	20.38	22
		25	25	20.97	20.39	20.32	22
		50	0	20.87	20.38	20.43	22
	Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
26765					26865	26965	
15MHz	QPSK	1	0	22.97	22.96	22.93	24
		1	38	23.05	23.01	22.95	24
		1	74	22.85	22.83	22.81	24
		36	0	22.15	22.05	22.06	23
		36	18	22.08	22.09	22.06	23
		36	39	22.01	22.06	21.92	23
		75	0	22.08	22.08	22.05	23
	16QAM	1	0	22.13	22.52	22.36	23
		1	38	22.23	22.57	22.39	23
		1	74	22.02	22.41	22.26	23
		36	0	21.06	21.13	21.07	22
		36	18	21.07	21.05	21.04	22
		36	39	21.06	21.08	20.93	22
		75	0	21.09	21.04	21	22

LTE Band 38				Conducted Power(dBm)			
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				37775	38000	38225	
5MHz	QPSK	1	0	23.03	23.04	22.93	23.5
		1	13	23.19	23.09	23.16	23.5
		1	24	22.9	23.04	23	23.5
		12	0	22.03	22.09	22	22.5
		12	6	22.05	22.05	22.03	22.5
		12	13	22.05	22.09	21.99	22.5
	16QAM	25	0	22.01	22.11	21.98	22.5
		1	0	22.21	22.04	22.03	22.5
		1	13	22.32	22.21	22.18	22.5
		1	24	22.19	22.11	22	22.5
		12	0	21.03	21.05	20.99	21.5
		12	6	21.12	20.99	21.05	21.5
		12	13	20.99	21.09	20.98	21.5

Bandwidth	Modulation	25	0	21.05	21.14	21	21.5
		RB size	RB offset	Channel	Channel	Channel	Tune up
10MHz	QPSK	1	0	23.08	23.08	23.12	23.5
		1	25	23.44	23.27	23.32	23.5
		1	49	23.07	23.08	23.08	23.5
		25	0	22.07	22.09	22.08	22.5
		25	13	22.07	22.12	22.06	22.5
		25	25	22.12	22.11	22.03	22.5
		50	0	22.08	22.13	22.09	22.5
	16QAM	1	0	22.44	22.16	21.95	22.5
		1	25	22.15	22.21	22.45	22.5
		1	49	22.16	21.99	22.13	22.5
		25	0	21.14	21.09	21.11	21.5
		25	13	21.08	21.08	21.04	21.5
		25	25	21.08	21.08	21.07	21.5
		50	0	21.13	21.13	21.03	21.5
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				37825	38000	38175	
15MHz	QPSK	1	0	23	23.11	23	23.5
		1	38	23.24	23.17	23.13	23.5
		1	74	22.99	23	22.95	23.5
		36	0	22.16	22.2	22.15	22.5
		36	18	22.18	22.12	22.25	22.5
		36	39	22.17	22.13	22.17	22.5
		75	0	22.21	22.22	22.24	22.5
	16QAM	1	0	22.22	21.96	22.1	22.5
		1	38	22.2	22.15	22.21	22.5
		1	74	22.01	21.85	22.05	22.5
		36	0	21.13	21.08	21.12	21.5
		36	18	21.18	21.05	21.13	21.5
		36	39	21.06	21.09	21.09	21.5
		75	0	21.15	21.15	21.11	21.5
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				37850	38000	38150	
20MHz	QPSK	1	0	22.97	22.87	22.89	23.5
		1	50	23.31	23.28	23.22	23.5
		1	99	22.91	22.84	22.89	23.5
		50	0	22.12	22.09	22.03	22.5
		50	25	22.1	22.08	22.05	22.5
		50	50	22.07	21.99	21.98	22.5
		100	0	22.05	22.04	22.02	22.5
	16QAM	1	0	21.91	21.87	21.96	22.5
		1	50	22.33	22.17	22.21	22.5
		1	99	21.88	21.76	21.85	22.5
		50	0	21.1	21.1	21.02	21.5

	50	25	21.06	21.09	21.08	21.5
	50	50	21	21.03	21	21.5
	100	0	21.09	21.03	20.97	21.5

LTE FDD Band 41				Conducted Power(dBm)				
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Channel	Tune up
				40065	40385	40705	41215	
5MHz	QPSK	1	0	23.78	23.73	23.65	23.62	24
		1	13	23.86	23.88	23.72	23.74	24
		1	24	23.6	23.68	23.66	23.79	24
		12	0	22.83	22.78	22.78	22.88	23
		12	6	22.86	22.78	22.69	22.79	23
		12	13	22.74	22.72	22.71	22.82	23
		25	0	22.84	22.73	22.7	22.85	23
	16QAM	1	0	22.92	22.82	22.86	22.77	23
		1	13	22.78	22.85	22.79	22.94	23
		1	24	22.84	22.74	22.73	22.85	23
		12	0	21.8	21.72	21.92	21.78	22
		12	6	21.79	21.76	21.86	21.89	22
		12	13	21.81	21.74	21.85	21.69	22
		25	0	21.87	21.72	21.73	21.8	22
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Channel	Tune up
				40090	40390	40690	41190	
10MHz	QPSK	1	0	23.59	23.59	23.46	23.78	24
		1	25	23.66	23.71	23.64	23.88	24
		1	49	23.75	23.77	23.62	23.82	24
		25	0	22.83	22.86	22.8	22.89	23
		25	13	22.86	22.83	22.82	22.87	23
		25	25	22.88	22.81	22.76	22.74	23
		50	0	22.79	22.86	22.64	22.9	23
	16QAM	1	0	22.89	22.9	22.81	22.95	23
		1	25	22.14	22.86	22.73	22.21	23
		1	49	22.84	22.74	22.79	22.86	23
		25	0	21.86	21.85	21.86	21.98	22
		25	13	21.79	21.82	21.75	21.9	22
		25	25	21.88	21.87	21.8	21.84	22
		50	0	21.85	21.85	21.73	21.84	22
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Channel	Tune up
				40115	40395	40685	41165	
15MHz	QPSK	1	0	23.7	23.83	23.66	23.76	24
		1	38	23.79	23.81	23.74	23.86	24
		1	74	23.65	23.77	23.63	23.64	24
		36	0	22.86	22.84	22.81	22.98	23
		36	18	22.87	22.89	22.79	22.85	23
		36	39	22.94	22.83	22.77	22.85	23

		75	0	22.87	22.88	22.76	22.89	23
	16QAM	1	0	22.69	22.91	22.77	22.85	23
		1	38	22.95	22.94	22.81	22.78	23
		1	74	22.87	22.56	22.78	22.63	23
		36	0	21.77	21.81	21.79	21.88	22
		36	18	21.79	21.76	21.74	21.86	22
		36	39	21.8	21.84	21.69	21.77	22
		75	0	21.79	21.77	21.71	21.89	22
Bandwidth		Modulation	RB size	RB offset	Channel	Channel	Channel	Channel
				40140	40400	40670	41140	
20MHz	QPSK	1	0	23.58	23.57	23.45	23.41	24
		1	50	23.84	23.36	23.33	23.9	24
		1	99	23.57	23.14	23.12	23.4	24
		50	0	22.67	22.79	22.64	22.92	23
		50	25	22.76	22.59	22.57	22.89	23
		50	50	22.83	19.77	19.82	22.72	23
		100	0	22.75	19.9	20.05	22.79	23
	16QAM	1	0	22.7	22.27	22.25	22.44	23
		1	50	22.96	22.87	22.32	23.25	23
		1	99	22.91	22.65	22.57	22.55	23
		50	0	21.7	21.81	21.79	21.86	22
		50	25	21.79	21.77	21.73	21.89	22
		50	50	21.79	21.72	21.73	21.75	22
		100	0	21.74	21.77	21.7	21.83	22

LTE Band 66				Conducted Power(dBm)			
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				19957	20175	20393	
1.4MHz	QPSK	1	0	23.06	23.04	22.93	23.5
		1	2	23.01	23.03	23.04	23.5
		1	5	22.96	23.02	22.93	23.5
		3	0	22.42	22.33	22.24	22.5
		3	2	22.48	22.33	22.25	22.5
		3	3	22.45	22.32	22.21	22.5
		6	0	22.28	22.12	22.04	22.5
	16QAM	1	0	22.15	22.15	21.89	22.5
		1	2	22.23	22.25	22.01	22.5
		1	5	22.22	22.15	21.93	22.5
		3	0	22.24	22.09	22.17	22.5
		3	2	22.27	22.13	22.22	22.5
		3	3	22.19	22.07	22.19	22.5
		6	0	21.15	21.11	20.96	21.5
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				19965	20175	20385	
3MHz	QPSK	1	0	23.02	23.03	23.05	23.5
		1	7	23.05	22.99	23.06	23.5
		1	14	23.01	22.99	22.9	23.5

		8	0	22.23	22.08	22	22.5
		8	4	22.27	22.08	22.06	22.5
		8	7	22.21	22.06	22	22.5
		15	0	22.17	22.05	21.96	22.5
	16QAM	1	0	22.33	22.46	21.98	22.5
		1	7	22.46	22.39	22.16	22.5
		1	14	22.3	22.48	21.95	22.5
		8	0	21.16	21.19	21.06	21.5
		8	4	21.21	21.24	21.08	21.5
		8	7	21.17	21.17	21.03	21.5
		15	0	21.12	21.1	21.02	21.5
Bandwidth		Modulation	RB size	RB offset	Channel	Channel	Channel
	19975				20175	20375	
5MHz	QPSK	1	0	23.05	22.99	22.87	23.5
		1	13	23.04	22.89	22.67	23.5
		1	24	23.02	22.62	22.44	23.5
		12	0	22.04	22.05	21.75	22.5
		12	6	22	22.1	21.97	22.5
		12	13	21.9	22.1	21.94	22.5
	25	0	21.76	22.05	21.93	22.5	
	16QAM	1	0	21.93	22.07	22.11	22.5
		1	13	22.07	22.18	22.22	22.5
		1	24	21.95	22.01	22.08	22.5
		12	0	21.13	21.02	20.94	21.5
		12	6	21.2	21.05	21.03	21.5
		12	13	21.15	21.03	20.97	21.5
		25	0	21.19	21.07	20.93	21.5
Bandwidth		Modulation	RB size	RB offset	Channel	Channel	Channel
	20000				20175	20350	
10MHz	QPSK	1	0	23.06	22.94	22.64	23.5
		1	25	22.94	22.83	22.58	23.5
		1	49	22.61	22.47	22.41	23.5
		25	0	21.77	21.92	21.55	22.5
		25	13	21.89	22.01	21.63	22.5
		25	25	22.04	22.06	21.82	22.5
	16QAM	50	0	22.01	22.02	21.85	22.5
		1	0	22.64	22.07	22.1	22.5
		1	25	22.8	22.1	22.06	22.5
		1	49	22.6	21.84	21.82	22.5
		25	0	21.25	21.18	21.03	21.5
		25	13	21.27	21.18	20.97	21.5
		25	25	21.37	21.19	21.04	21.5
		50	0	21.28	21.12	21.02	21.5
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				20025	20175	20325	
15MHz	QPSK	1	0	23.02	22.82	22.7	23.5
		1	38	22.9	22.59	22.49	23.5
		1	74	22.91	22.49	22.33	23.5
		36	0	22.09	22.11	21.81	22.5
		36	18	22.23	21.99	21.92	22.5

	16QAM	36	39	22.31	22.12	21.78	22.5
		75	0	22.27	22.05	21.89	22.5
		1	0	22.59	22.33	22	22.5
		1	38	22.67	22.37	21.97	22.5
		1	74	22.49	22.16	21.71	22.5
		36	0	21.22	21.14	21.14	21.5
		36	18	21.25	21.07	21.03	21.5
		36	39	21.29	21.09	21.06	21.5
		75	0	21.28	21.11	21.12	21.5
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				132072	132322	132572	
20MHz	QPSK	1	0	22.59	22.43	22.4	23.5
		1	50	23.07	22.72	22.63	23.5
		1	99	22.34	22.11	22.15	23.5
		50	0	21.7	21.74	21.75	22.5
		50	25	22.04	21.75	21.63	22.5
		50	50	22.05	21.86	21.59	22.5
		100	0	21.96	21.86	21.67	22.5
	16QAM	1	0	22.18	22.34	21.82	22.5
		1	50	22.56	22.69	22.23	22.5
		1	99	22.04	22.06	21.48	22.5
		50	0	21.06	21.06	21.15	21.5
		50	25	21.19	21.09	20.97	21.5
		50	50	21.2	21.16	20.83	21.5
		100	0	21.15	21.15	21.06	21.5

Table 12: Conducted Power Of LTE

8.1.4 Conducted Power Of Wi-Fi and BT

Mode	Channel	Frequency (MHz)	Data Rate (Mbps)	Average Power (dBm)	Tune up	Power Setting
802.11b	1	2412	1	16.35	16.5	15
	6	2437		16.19	16.5	15
	11	2462		16.11	16.5	15
802.11g	1	2412	6	12.12	12.5	10
	6	2437		12.01	12.5	10
	11	2462		11.92	12.5	10
802.11n HT20 SISO	1	2412	6.5	12.43	12.5	9
	6	2437		12.23	12.5	9
	11	2462		12.11	12.5	9
802.11n HT40 SISO	1	2412	6.5	12.54	13	9
	6	2437		12.41	13	9
	11	2462		12.38	13	9

Band	mode	Channel	Frequency (MHz)	Data Rate (Mbps)	Tune up	Average Power (dBm)	Power setting
5.2GHz	802.11a	36	5180	6	15.5	14.7	15
		40	5200		15.5	14.63	15
		48	5240		15.5	15.05	15
	802.11n HT20	36	5180	6.5	14	13.47	14
		40	5200		14	13.38	14
		48	5240		14	13.85	14
	802.11n HT40	38	5190	13.5	14	13.96	14
		46	5230		14	13.73	14
	802.11ac 20M	36	5180	6.5	14	13.46	14
		40	5200		14	13.38	14
		48	5240		14	13.74	14
	802.11ac 40M	38	5190	13.5	14	13.53	14
		46	5230		14	13.86	14
	802.11ac 80M	42	5210	29.3	14	13.95	14

Band	mode	Channel	Frequency (MHz)	Data Rate (Mbps)	Tune up	Average Power (dBm)	Power setting
5.3GHz	802.11a	52	5260	6	15.5	15.22	15
		60	5300		15.5	15.15	15
		64	5320		15.5	14.97	15
	802.11n HT20	52	5260	6.5	14	13.98	14
		60	5300		14	13.9	14
		64	5320		14	13.97	14
	802.11n HT40	54	5270	13.5	14.5	14.03	14
		62	5310		14.5	13.79	14
	802.11ac 20M	52	5260	6.5	14.5	14.04	14
		60	5300		14.5	13.92	14
		64	5320		14.5	13.9	14
	802.11ac	54	5270	13.5	14.5	14.09	14

Band	mode	Channel	Frequency (MHz)	Data Rate (Mbps)	Tune up	Average Power (dBm)	Power setting
	40M	62	5310		14.5	13.87	14
	802.11ac 80M	58	5290	29.3	14	13.89	14
5.8GHz	802.11a	149	5745	6	15	14.51	15
		157	5785		15	14.22	15
		165	5825		15	14.17	15
	802.11n HT20	149	5745	6.5	13.5	13.34	15
		157	5785		13.5	13.05	15
		165	5825		13.5	12.99	15
	802.11n HT40	151	5755	13.5	13.5	13.25	15
		159	5795		13.5	13.24	15
	802.11ac 20M	149	5745	6.5	13.5	13.4	15
		157	5785		13.5	13.18	15
		165	5825		13.5	13.04	15
	802.11ac 40M	151	5755	13.5	13.5	13.39	15
		159	5795		13.5	13.04	15
	802.11ac 80M	155	5775	29.3	13.5	13.34	15

Table 13: Conducted Power Of Wi-Fi

Note:

- a) Power must be measured at each transmit antenna port according to the DSSS and OFDM transmission configurations in each standalone and aggregated frequency band.
- b) Power measurement is required for the transmission mode configuration with the highest maximum output power specified for production units.
 - 1) When the same highest maximum output power specification applies to multiple transmission modes, the largest channel bandwidth configuration with the lowest order modulation and lowest data rate is measured.
 - 2) When the same highest maximum output power is specified for multiple largest channel bandwidth configurations with the same lowest order modulation or lowest order modulation and lowest data rate, power measurement is required for all equivalent 802.11 configurations with the same maximum output power.
- c) For each transmission mode configuration, power must be measured for the highest and lowest channels; and at the mid-band channel(s) when there are at least 3 channels. For configurations with multiple mid-band channels, due to an even number of channels, both channels should be measured.

BT			Average Conducted Power (dBm)	Tune up	Power Setting
Modulation	Channel	Frequency (MHz)			
GFSK	0	2402	12.95	13	default
	39	2441	11.76	13	default
	78	2480	9.42	13	default
π/4DQPSK	0	2402	12.87	13	default
	39	2441	10.76	13	default
	78	2480	8.3	13	default
8DPSK	0	2402	12.91	13	default
	39	2441	10.88	13	default
	78	2480	8.73	13	default

BLE_1Mbps			Average Conducted Power (dBm)	Tune up	Power Setting
Modulation	Channel	Frequency (MHz)			
GFSK	0	2402	-0.41	2	default
	19	2440	0.22	2	default
	39	2480	0.28	2	default

BLE_2Mbps			Average Conducted Power (dBm)	Tune up	Power Setting
Modulation	Channel	Frequency (MHz)			
GFSK	0	2402	-0.25	2	default
	19	2440	0.26	2	default
	39	2480	0.44	2	default

Table 14: Conducted Power Of BT

8.2 Stand-alone SAR test evaluation

Unless specifically required by the published RF exposure KDB procedures, standalone 1-g head or body and 10-g extremity SAR evaluation for general population exposure conditions, by measurement or numerical simulation, is not required when the corresponding SAR Test Exclusion Threshold condition is satisfied. These test exclusion conditions are based on source-based time-averaged maximum conducted output power of the RF channel requiring evaluation, adjusted for tune-up tolerance, and the minimum test separation distance required for the exposure conditions.

Freq. Band	Frequency (GHz)	Position	Average Power		Test Separation (mm)	Calculate Value	Exclusion Threshold	Exclusion (Y/N)
			dBm	mW				
Wi-Fi	2.45	Head	16.5	44.7	0	14.0	3	N
		Body-worn	16.5	44.7	10	7.0	3	N
		hotspot	16.5	44.7	10	7.0	3	N
Wi-Fi	5	Head	15.5	35.5	0	15.9	3	N
		Body-worn	15.5	35.5	10	7.9	3	N
		hotspot	15.5	35.5	10	7.9	3	N
Bluetooth	2.48	Head	13	20.0	0	6.3	3	N
		Body-worn	13	20.0	10	3.1	3	N
		hotspot	13	20.0	10	3.1	3	N

The 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances ≤ 50 mm are determined by:

$[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0$ for 1-g SAR and ≤ 7.5 for 10-g extremity SAR, where

- $f(\text{GHz})$ is the RF channel transmit frequency in GHz
- Power and distance are rounded to the nearest mW and mm before calculation
- The result is rounded to one decimal place for comparison

The test exclusions are applicable only when the minimum test separation distance is ≤ 50 mm and for transmission frequencies between 100 MHz and 6 GHz. When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test exclusion.

8.3 Measurement of SAR Data

8.3.1 SAR Result Of GSM850

Test position	Test mode	Test Ch./Freq.	SAR (W/kg) 1-g	SAR (W/kg) 10-g	Power Drift (dB)	Conducted Power (dBm)	Tune up Limit (dBm)	Scaled factor	Scaled SAR (W/kg) 1-g	Liquid Temp	SAR limit (W/kg)
Head Test data with SIM1											
Left cheek	GSM	190/836.6	0.248	0.188	0.09	30.91	31.5	1.146	0.284	22.1	1.6
Left tilted	GSM	190/836.6	0.123	0.096	0.15	30.91	31.5	1.146	0.141	22.1	1.6
Right cheek	GSM	190/836.6	0.271	0.208	0.17	30.91	31.5	1.146	0.310	22.1	1.6
Right tilted	GSM	190/836.6	0.131	0.101	0.19	30.91	31.5	1.146	0.150	22.1	1.6
Head Test data at the worst case with SIM2											
Right cheek	GSM	190/836.6	0.256	0.197	0.03	30.91	31.5	1.146	0.293	22.1	1.6
Body worn Test data with SIM1(Separate 10mm)											
Front side	GPRS 4TS	190/836.6	0.412	0.314	0.08	27	27.5	1.122	0.462	22.1	1.6
Back side	GPRS 4TS	190/836.6	0.576	0.423	-0.02	27	27.5	1.122	0.646	22.1	1.6
Back side	EGPRS 4TS	190/836.6	0.211	0.159	0.04	19.48	20	1.127	0.238	22.1	1.6
Body worn Test data at the worst case with SIM2(Separate 10mm)											
Back side	GPRS 4TS	190/836.6	0.549	0.401	0.06	27	27.5	1.122	0.616	22.1	1.6
Hotspot Test data with SIM1(Separate 10mm)											
Front side	GPRS 4TS	190/836.6	0.412	0.314	0.08	27	27.5	1.122	0.462	22.1	1.6
Back side	GPRS 4TS	190/836.6	0.576	0.423	-0.02	27	27.5	1.122	0.646	22.1	1.6
Left side	GPRS 4TS	190/836.6	0.305	0.212	-0.16	27	27.5	1.122	0.342	22.1	1.6
Right side	GPRS 4TS	190/836.6	0.318	0.22	-0.14	27	27.5	1.122	0.357	22.1	1.6
Bottom side	GPRS 4TS	190/836.6	0.076	0.045	0.1	27	27.5	1.122	0.085	22.1	1.6
Back side	EGPRS 4TS	190/836.6	0.211	0.159	0.04	19.48	20	1.127	0.238	22.1	1.6
Hotspot Test data at the worst case with SIM2(Separate 10mm)											
Back side	GPRS 4TS	190/836.6	0.549	0.401	0.06	27	27.5	1.122	0.616	22.1	1.6

Table 15: SAR Result Of GSM850

Note:

- 1) The maximum Scaled SAR value is marked in bold. Graph Results refer to Appendix B
- 2) Per FCC KDB Publication 447498 D01, if the reported (scaled) SAR measured at the middle channel or highest output power channel for each test configuration is ≤ 0.8 W/kg then testing at the other channels is not required for such test configuration(s).

8.3.2 SAR Result Of GSM1900

Test position	Test mode	Test Ch./Freq.	SAR (W/kg) 1-g	SAR (W/kg) 10-g	Power Drift(dB)	Conducted Power (dBm)	Tune up Limit (dBm)	Scaled factor	Scaled SAR (W/kg) 1-g	Liquid Temp	SAR limit (W/kg)
Head Test data with SIM1											
Left cheek	GSM	661/1880	0.136	0.085	0.08	29.2	29.5	1.072	0.146	22.3	1.6
Left tilted	GSM	661/1880	0.062	0.033	0.08	29.2	29.5	1.072	0.066	22.3	1.6
Right cheek	GSM	661/1880	0.169	0.108	-0.18	29.2	29.5	1.072	0.181	22.3	1.6
Right tilted	GSM	661/1880	0.101	0.053	0.03	29.2	29.5	1.072	0.108	22.3	1.6
Head Test data at the worst case with SIM2											
Right cheek	GSM	661/1880	0.147	0.099	-0.14	29.2	29.5	1.072	0.158	22.3	1.6
Body worn Test data with SIM1(Separate 10mm)											
Front side	GPRS 4TS	661/1880	0.218	0.123	0.01	25.01	25.5	1.119	0.244	22.3	1.6
Back side	GPRS 4TS	661/1880	0.548	0.306	0.08	25.01	25.5	1.119	0.613	22.3	1.6
Back side	EGPRS 4TS	661/1880	0.205	0.151	-0.11	21.95	22.5	1.135	0.233	22.3	1.6
Body worn Test data at the worst case with SIM2(Separate 10mm)											
Back side	GPRS 4TS	661/1880	0.522	0.295	-0.03	25.01	25.5	1.119	0.584	22.3	1.6
Hotspot Test data with SIM1(Separate 10mm)											
Front side	GPRS 4TS	661/1880	0.218	0.123	0.01	25.01	25.5	1.119	0.244	22.3	1.6
Back side	GPRS 4TS	661/1880	0.548	0.306	0.08	25.01	25.5	1.119	0.613	22.3	1.6
Left side	GPRS 4TS	661/1880	0.119	0.067	0.02	25.01	25.5	1.119	0.133	22.3	1.6
Right side	GPRS 4TS	661/1880	0.099	0.055	0.14	25.01	25.5	1.119	0.111	22.3	1.6
Bottom side	GPRS 4TS	661/1880	0.366	0.192	0.01	25.01	25.5	1.119	0.410	22.3	1.6
Back side	EGPRS 4TS	661/1880	0.205	0.151	-0.11	21.95	22.5	1.135	0.233	22.3	1.6
Hotspot Test data at the worst case with SIM2(Separate 10mm)											
Back side	GPRS 4TS	661/1880	0.522	0.295	-0.03	25.01	25.5	1.119	0.584	22.3	1.6

Table 16: SAR Result Of GSM1900

Note:

- 1) The maximum Scaled SAR value is marked in bold. Graph Results refer to Appendix B
- 2) Per FCC KDB Publication 447498 D01, if the reported (scaled) SAR measured at the middle channel or highest output power channel for each test configuration is ≤ 0.8 W/kg then testing at the other channels is not required for such test configuration(s).

8.3.3 SAR Result Of WCDMA Band II

Test position	Test mode	Test Ch./Freq.	SAR (W/kg) 1-g	SAR (W/kg) 10-g	Power Drift (dB)	Conducted Power (dBm)	Tune up Limit (dBm)	Scaled factor	Scaled SAR (W/kg) 1-g	Liquid Temp	SAR limit (W/kg)
Head Test data with SIM1											
Left cheek	RMC	9400/1880	0.151	0.094	-0.05	22.24	22.5	1.062	0.160	22.3	1.6
Left tilted	RMC	9400/1880	0.066	0.037	0.05	22.24	22.5	1.062	0.070	22.3	1.6
Right cheek	RMC	9400/1880	0.168	0.107	0.15	22.24	22.5	1.062	0.178	22.3	1.6
Right tilted	RMC	9400/1880	0.094	0.057	0.06	22.24	22.5	1.062	0.100	22.3	1.6
Head Test data at the worst case with SIM2											
Right cheek	RMC	9400/1880	0.144	0.091	-0.08	22.24	22.5	1.062	0.153	22.3	1.6
Body worn Test data with SIM1(Separate 10mm)											
Front side	RMC	9400/1880	0.232	0.132	0.16	22.24	22.5	1.062	0.246	22.3	1.6
Back side	RMC	9400/1880	0.567	0.318	0.02	22.24	22.5	1.062	0.602	22.3	1.6
Body worn Test data at the worst case with SIM2(Separate 10mm)											
Back side	RMC	9400/1880	0.542	0.302	0.09	22.24	22.5	1.062	0.575	22.3	1.6
Hotspot Test data with SIM1(Separate 10mm)											
Front side	RMC	9400/1880	0.232	0.132	0.16	22.24	22.5	1.062	0.246	22.3	1.6
Back side	RMC	9400/1880	0.567	0.318	0.02	22.24	22.5	1.062	0.602	22.3	1.6
Left side	RMC	9400/1880	0.167	0.097	-0.04	22.24	22.5	1.062	0.177	22.3	1.6
Right side	RMC	9400/1880	0.11	0.062	0.13	22.24	22.5	1.062	0.117	22.3	1.6
Bottom side	RMC	9400/1880	0.42	0.218	0.14	22.24	22.5	1.062	0.446	22.3	1.6
Hotspot Test data at the worst case with SIM2(Separate 10mm)											
Back side	RMC	9400/1880	0.542	0.302	0.09	22.24	22.5	1.062	0.575	22.3	1.6

Table 17: SAR Result of WCDMA Band II

Note:

- 1) The maximum Scaled SAR value is marked in bold. Graph Results refer to Appendix B
- 2) If the reported (scaled) SAR measured at the middle channel or highest output power channel for each test configuration is ≤ 0.8 W/kg then testing at the other channels is not required for such test configuration(s).

8.3.4 SAR Result Of WCDMA Band V

Test position	Test mode	Test Ch./Freq.	SAR (W/kg) 1-g	SAR (W/kg) 10-g	Power Drift (dB)	Conducted Power (dBm)	Tune up Limit (dBm)	Scaled factor	Scaled SAR (W/kg) 1-g	Liquid Temp	SAR limit (W/kg)
Head Test data with SIM1											
Left cheek	RMC	4182/836.4	0.229	0.172	-0.15	22.37	22.5	1.030	0.236	22.1	1.6
Left tilted	RMC	4182/836.4	0.122	0.096	0.05	22.37	22.5	1.030	0.126	22.1	1.6
Right cheek	RMC	4182/836.4	0.246	0.187	0.06	22.37	22.5	1.030	0.253	22.1	1.6
Right tilted	RMC	4182/836.4	0.124	0.096	0.13	22.37	22.5	1.030	0.128	22.1	1.6
Head Test data at the worst case with SIM2											
Right cheek	RMC	4182/836.4	0.217	0.159	0.13	22.37	22.5	1.030	0.224	22.1	1.6
Body worn Test data with SIM1(Separate 10mm)											
Front side	RMC	4182/836.4	0.305	0.23	-0.08	22.37	22.5	1.030	0.314	22.1	1.6
Back side	RMC	4182/836.4	0.376	0.277	-0.01	22.37	22.5	1.030	0.387	22.1	1.6
Body worn Test data at the worst case with SIM2(Separate 10mm)											
Back side	RMC	4182/836.4	0.352	0.264	0.01	22.37	22.5	1.030	0.363	22.1	1.6
Hotspot Test data with SIM1(Separate 10mm)											
Front side	RMC	4182/836.4	0.305	0.23	-0.08	22.37	22.5	1.030	0.314	22.1	1.6
Back side	RMC	4182/836.4	0.376	0.277	-0.01	22.37	22.5	1.030	0.387	22.1	1.6
Left side	RMC	4182/836.4	0.256	0.177	-0.07	22.37	22.5	1.030	0.264	22.1	1.6
Right side	RMC	4182/836.4	0.244	0.171	0.02	22.37	22.5	1.030	0.251	22.1	1.6
Bottom side	RMC	4182/836.4	0.042	0.025	0.03	22.37	22.5	1.030	0.043	22.1	1.6
Hotspot Test data at the worst case with SIM2(Separate 10mm)											
Back side	RMC	4182/836.4	0.352	0.264	0.01	22.37	22.5	1.030	0.363	22.1	1.6

Table 18: SAR Result of WCDMA Band V

Note:

- 1) The maximum Scaled SAR value is marked in bold. Graph Results refer to Appendix B
- 2) If the reported (scaled) SAR measured at the middle channel or highest output power channel for each test configuration is ≤ 0.8 W/kg then testing at the other channels is not required for such test configuration(s).

8.3.5 SAR Result Of WCDMA Band IV

Test position	Test mode	Test Ch./Freq.	SAR (W/kg) 1-g	SAR (W/kg) 10-g	Power Drift (dB)	Conducted Power (dBm)	Tune up Limit (dBm)	Scaled factor	Scaled SAR (W/kg) 1-g	Liquid Temp	SAR limit (W/kg)
Head Test data with SIM1											
Left cheek	RMC	1412/1732.4	0.239	0.142	0.03	22.41	23	1.146	0.274	22.2	1.6
Left tilted	RMC	1412/1732.4	0.042	0.028	0.03	22.41	23	1.146	0.048	22.2	1.6
Right cheek	RMC	1412/1732.4	0.123	0.075	0.18	22.41	23	1.146	0.141	22.2	1.6
Right tilted	RMC	1412/1732.4	0.085	0.049	0.18	22.41	23	1.146	0.097	22.2	1.6
Head Test data at the worst case with SIM2											
Left cheek	RMC	1412/1732.4	0.207	0.131	-0.05	22.41	23	1.146	0.237	22.2	1.6
Body worn Test data with SIM1(Separate 10mm)											
Front side	RMC	1412/1732.4	0.19	0.113	-0.01	22.41	23	1.146	0.218	22.2	1.6
Back side	RMC	1412/1732.4	0.503	0.304	-0.06	22.41	23	1.146	0.576	22.2	1.6
Body worn Test data at the worst case with SIM2(Separate 10mm)											
Back side	RMC	1412/1732.4	0.485	0.292	0.03	22.41	23	1.146	0.556	22.2	1.6
Hotspot Test data with SIM1(Separate 10mm)											
Front side	RMC	1412/1732.4	0.19	0.113	-0.01	22.41	23	1.146	0.218	22.2	1.6
Back side	RMC	1412/1732.4	0.503	0.304	-0.06	22.41	23	1.146	0.576	22.2	1.6
Left side	RMC	1412/1732.4	0.147	0.086	0.01	22.41	23	1.146	0.168	22.2	1.6
Right side	RMC	1412/1732.4	0.165	0.088	0.12	22.41	23	1.146	0.189	22.2	1.6
Bottom side	RMC	1412/1732.4	0.36	0.197	0.01	22.41	23	1.146	0.412	22.2	1.6
Hotspot Test data at the worst case with SIM2(Separate 10mm)											
Back side	RMC	1412/1732.4	0.485	0.292	0.03	22.41	23	1.146	0.556	22.2	1.6

Table 19: SAR Result of WCDMA Band IV

Note:

- The maximum Scaled SAR value is marked in bold. Graph Results refer to Appendix B
- If the reported (scaled) SAR measured at the middle channel or highest output power channel for each test configuration is ≤ 0.8 W/kg then testing at the other channels is not required for such test configuration(s).

8.3.6 SAR Result Of LTE Band 2

Test position	Test mode	Test Ch./Freq.	Duty Cycle	SAR (W/kg) 1-g	SAR (W/kg) 10-g	Power Drift (dB)	Conducted power (dBm)	Tune up Limit (dBm)	Scaled factor	Scaled SAR (W/kg) 1-g	Liquid Temp.	SAR limit (W/kg)
Head Test data with SIM1												
Left cheek	20M QPSK 1RB_50	18900/1880	1:1	0.158	0.1	-0.08	23.35	23.5	1.035	0.164	22.3	1.6
Left cheek	20M QPSK 50RB_0	18900/1880	1:1	0.127	0.08	0.05	22.17	22.5	1.079	0.137	22.3	1.6
Left tilted	20M QPSK 1RB_50	18900/1880	1:1	0.072	0.045	0.03	23.35	23.5	1.035	0.075	22.3	1.6
Left tilted	20M QPSK 50RB_0	18900/1880	1:1	0.054	0.037	-0.09	22.17	22.5	1.079	0.058	22.3	1.6
Right cheek	20M QPSK 1RB_50	18900/1880	1:1	0.202	0.131	-0.14	23.35	23.5	1.035	0.209	22.3	1.6
Right cheek	20M QPSK 50RB_0	18900/1880	1:1	0.153	0.1	0.01	22.17	22.5	1.079	0.165	22.3	1.6
Right tilted	20M QPSK 1RB_50	18900/1880	1:1	0.118	0.074	0.02	23.35	23.5	1.035	0.122	22.3	1.6
Right tilted	20M QPSK 50RB_0	18900/1880	1:1	0.085	0.054	0.09	22.17	22.5	1.079	0.092	22.3	1.6
Head Test data at the worst case with SIM2												
Right cheek	20M QPSK 1RB_50	18900/1880	1:1	0.189	0.123	0.06	23.35	23.5	1.035	0.196	22.3	1.6
Body worn Test data with SIM1(Separate 10mm)												
Front side	20M QPSK 1RB_50	18900/1880	1:1	0.262	0.15	0.04	23.35	23.5	1.035	0.271	22.3	1.6
Front side	20M QPSK 50RB_0	18900/1880	1:1	0.204	0.117	-0.18	22.17	22.5	1.079	0.220	22.3	1.6
Back side	20M QPSK 1RB_50	18900/1880	1:1	0.637	0.356	-0.01	23.35	23.5	1.035	0.659	22.3	1.6
Back side	20M QPSK 50RB_0	18900/1880	1:1	0.493	0.276	0.12	22.17	22.5	1.079	0.532	22.3	1.6
Body worn Test data at the worst case with SIM2(Separate 10mm)												
Back side	20M QPSK 1RB_50	18900/1880	1:1	0.612	0.347	0.06	23.35	23.5	1.035	0.634	22.3	1.6
Hotspot Test data with SIM1(Separate 10mm)												
Front side	20M QPSK 1RB_50	18900/1880	1:1	0.262	0.15	0.04	23.35	23.5	1.035	0.271	22.3	1.6
Front side	20M QPSK 50RB_0	18900/1880	1:1	0.204	0.117	-0.18	22.17	22.5	1.079	0.220	22.3	1.6
Back side	20M QPSK 1RB_50	18900/1880	1:1	0.637	0.356	-0.01	23.35	23.5	1.035	0.659	22.3	1.6
Back side	20M QPSK 50RB_0	18900/1880	1:1	0.493	0.276	0.12	22.17	22.5	1.079	0.532	22.3	1.6
Left side	20M QPSK 1RB_50	18900/1880	1:1	0.15	0.085	0.15	23.35	23.5	1.035	0.155	22.3	1.6
Left side	20M QPSK 50RB_0	18900/1880	1:1	0.124	0.061	0.06	22.17	22.5	1.079	0.134	22.3	1.6
Right side	20M QPSK 1RB_50	18900/1880	1:1	0.078	0.048	0.08	23.35	23.5	1.035	0.081	22.3	1.6
Right side	20M QPSK 50RB_0	18900/1880	1:1	0.051	0.033	-0.02	22.17	22.5	1.079	0.055	22.3	1.6
Bottom side	20M QPSK 1RB_50	18900/1880	1:1	0.51	0.264	0.04	23.35	23.5	1.035	0.528	22.3	1.6
Bottom side	20M QPSK 50RB_0	18900/1880	1:1	0.387	0.2	0.11	22.17	22.5	1.079	0.418	22.3	1.6
Hotspot Test data at the worst case with SIM2(Separate 10mm)												
Back side	20M QPSK 1RB_50	18900/1880	1:1	0.612	0.347	0.06	23.35	23.5	1.035	0.634	22.3	1.6

Table 20: SAR Result of LTE Band 2

Note:

- 1) The maximum Scaled SAR value is marked in bold. Graph results refer to Appendix B
- 2) If the reported (scaled) SAR measured at the middle channel or highest output power channel for each test configuration is ≤ 0.8 W/kg then testing at the other channels is not required for such test configuration(s).

8.3.7 SAR Result Of LTE Band 7

Test position	Test mode	Test Ch./Freq.	Duty Cycle	SAR (W/kg) 1-g	SAR (W/kg) 10-g	Power Drift (dB)	Conducted Power (dBm)	Tune up Limit (dBm)	Scaled factor	Scaled SAR (W/kg) 1-g	Liquid Temp	SAR limit (W/kg)
Head Test data with SIM1												
Left cheek	20M QPSK 1RB_50	20850/2510	1:1	0.55	0.285	-0.01	22.31	22.5	1.045	0.575	22.1	1.6
Left cheek	20M QPSK 50RB_0	20850/2510	1:1	0.467	0.237	0.03	21.15	21.5	1.084	0.506	22.1	1.6
Left tilted	20M QPSK 1RB_50	20850/2510	1:1	0.093	0.051	0.05	22.31	22.5	1.045	0.097	22.1	1.6
Left tilted	20M QPSK 50RB_0	20850/2510	1:1	0.072	0.041	-0.06	21.15	21.5	1.084	0.078	22.1	1.6
Right cheek	20M QPSK 1RB_50	20850/2510	1:1	0.276	0.157	-0.02	22.31	22.5	1.045	0.288	22.1	1.6
Right cheek	20M QPSK 50RB_0	20850/2510	1:1	0.22	0.125	0.14	21.15	21.5	1.084	0.238	22.1	1.6
Right tilted	20M QPSK 1RB_50	20850/2510	1:1	0.094	0.047	-0.09	22.31	22.5	1.045	0.098	22.1	1.6
Right tilted	20M QPSK 50RB_0	20850/2510	1:1	0.071	0.04	-0.02	21.15	21.5	1.084	0.077	22.1	1.6
Head Test data at the worst case with SIM2												
Left cheek	20M QPSK 1RB_50	20850/2510	1:1	0.541	0.279	0.03	22.31	22.5	1.045	0.565	22.1	1.6
Body worn Test data with SIM1(Separate 10mm)												
Front side	20M QPSK 1RB_50	20850/2510	1:1	0.27	0.143	-0.09	22.31	22.5	1.045	0.282	22.1	1.6
Front side	20M QPSK 50RB_0	20850/2510	1:1	0.248	0.135	0.02	21.15	21.5	1.084	0.269	22.1	1.6
Back side	20M QPSK 1RB_50	20850/2510	1:1	1.18	0.574	-0.07	22.31	22.5	1.045	1.233	22.1	1.6
Back side	20M QPSK 1RB_50	21100/2535.5	1:1	1.18	0.565	-0.06	22.24	22.5	1.062	1.253	22.1	1.6
Back side-repeat	20M QPSK 1RB_50	21100/2535.5	1:1	1.14	0.561	0.03	22.24	22.5	1.062	1.210	22.1	1.6
Back side	20M QPSK 1RB_50	21350/2560	1:1	1.13	0.546	0.19	22.14	22.5	1.086	1.228	22.1	1.6
Back side	20M QPSK 50RB_0	20850/2510	1:1	0.965	0.47	0.13	21.15	21.5	1.084	1.046	22.1	1.6
Back side	20M QPSK 50RB_0	21100/2535.5	1:1	1	0.483	0.12	21.06	21.5	1.107	1.107	22.1	1.6
Back side	20M QPSK 50RB_0	21350/2560	1:1	1	0.477	-0.17	21.09	21.5	1.099	1.099	22.1	1.6
Back side	20M QPSK 100RB_0	20850/2510	1:1	1.04	0.507	0.06	21.11	21.5	1.094	1.138	22.1	1.6
Body worn Test data at the worst case with SIM2(Separate 10mm)												
Back side	20M QPSK 1RB_50	21100/2535.5	1:1	1.06	0.553	0.06	22.24	22.5	1.062	1.125	22.1	1.6
Hotspot Test data with SIM1(Separate 10mm)												
Front side	20M QPSK 1RB_50	20850/2510	1:1	0.27	0.143	-0.09	22.31	22.5	1.045	0.282	22.1	1.6
Front side	20M QPSK 50RB_0	20850/2510	1:1	0.248	0.135	0.02	21.15	21.5	1.084	0.269	22.1	1.6
Back side	20M QPSK 1RB_50	20850/2510	1:1	1.18	0.574	-0.07	22.31	22.5	1.045	1.233	22.1	1.6
Back side	20M QPSK 1RB_50	21100/2535.5	1:1	1.18	0.565	-0.06	22.24	22.5	1.062	1.253	22.1	1.6
Back side-repeat	20M QPSK 1RB_50	21100/2535.5	1:1	1.14	0.561	0.03	22.24	22.5	1.062	1.210	22.1	1.6
Back side	20M QPSK 1RB_50	21350/2560	1:1	1.13	0.546	0.19	22.14	22.5	1.086	1.228	22.1	1.6
Back side	20M QPSK 50RB_0	20850/2510	1:1	0.965	0.47	0.13	21.15	21.5	1.084	1.046	22.1	1.6
Back side	20M QPSK 50RB_0	21100/2535.5	1:1	1	0.483	0.12	21.06	21.5	1.107	1.107	22.1	1.6
Back side	20M QPSK 50RB_0	21350/2560	1:1	1	0.477	-0.17	21.09	21.5	1.099	1.099	22.1	1.6
Back side	20M QPSK 100RB_0	20850/2510	1:1	1.04	0.507	0.06	21.11	21.5	1.094	1.138	22.1	1.6
Left side	20M QPSK 1RB_50	20850/2510	1:1	0.331	0.18	-0.05	22.31	22.5	1.045	0.346	22.1	1.6

Left side	20M QPSK 50RB_0	20850/2510	1:1	0.279	0.151	0.05	21.15	21.5	1.084	0.302	22.1	1.6
Right side	20M QPSK 1RB_50	20850/2510	1:1	0.058	0.029	-0.08	22.31	22.5	1.045	0.061	22.1	1.6
Right side	20M QPSK 50RB_0	20850/2510	1:1	0.048	0.024	-0.19	21.15	21.5	1.084	0.052	22.1	1.6
Bottom side	20M QPSK 1RB_50	20850/2510	1:1	0.798	0.405	0.15	22.31	22.5	1.045	0.834	22.1	1.6
Bottom side	20M QPSK 1RB_50	21100/2535.5	1:1	0.721	0.361	0.18	22.31	22.5	1.045	0.753	22.1	1.6
Bottom side	20M QPSK 1RB_50	21350/2560	1:1	0.782	0.389	0.18	22.31	22.5	1.045	0.817	22.1	1.6
Bottom side	20M QPSK 50RB_0	20850/2510	1:1	0.671	0.341	0.18	21.15	21.5	1.084	0.727	22.1	1.6
Bottom side	20M QPSK 100RB_0	20850/2510	1:1	0.67	0.341	-0.09	21.11	21.5	1.094	0.733	22.1	1.6
Hotspot Test data at the worst case with SIM2(Separate 10mm)												
Back side	20M QPSK 1RB_50	21100/2535.5	1:1	1.06	0.553	0.06	22.24	22.5	1.062	1.125	22.1	1.6

Table 21: SAR Result of LTE Band 7

Note:

- 3) The maximum Scaled SAR value is marked in bold. Graph results refer to Appendix B
- 4) If the reported (scaled) SAR measured at the middle channel or highest output power channel for each test configuration is ≤ 0.8 W/kg then testing at the other channels is not required for such test configuration(s).

8.3.8 SAR Result Of LTE Band 12

Test position	Test mode	Test Ch./Freq.	Duty Cycle	SAR (W/kg) 1-g	SAR (W/kg) 10-g	Power Drift (dB)	Conducted power (dBm)	Tune up Limit (dBm)	Scaled factor	Scaled SAR (W/kg) 1-g	Liquid Temp.	SAR limit (W/kg)
Head Test data with SIM1												
Left cheek	10M QPSK 1RB_25	23060/704	1:1	0.114	0.09	-0.12	22.31	23	1.172	0.134	22.1	1.6
Left cheek	10M QPSK 25RB_0	23060/704	1:1	0.085	0.068	0.07	21.25	22	1.189	0.101	22.1	1.6
Left tilted	10M QPSK 1RB_25	23060/704	1:1	0.062	0.05	0.05	22.31	23	1.172	0.073	22.1	1.6
Left tilted	10M QPSK 25RB_0	23060/704	1:1	0.046	0.037	0.02	21.25	22	1.189	0.055	22.1	1.6
Right cheek	10M QPSK 1RB_25	23060/704	1:1	0.127	0.102	-0.09	22.31	23	1.172	0.149	22.1	1.6
Right cheek	10M QPSK 25RB_0	23060/704	1:1	0.094	0.076	0.09	21.25	22	1.189	0.112	22.1	1.6
Right tilted	10M QPSK 1RB_25	23060/704	1:1	0.066	0.054	0.03	22.31	23	1.172	0.077	22.1	1.6
Right tilted	10M QPSK 25RB_0	23060/704	1:1	0.049	0.04	0.08	21.25	22	1.189	0.058	22.1	1.6
Head Test data at the worst case with SIM2												
Right cheek	10M QPSK 1RB_25	23060/704	1:1	0.116	0.095	0.04	22.31	23	1.172	0.136	22.1	1.6
Body worn Test data with SIM1(Separate 10mm)												
Front side	10M QPSK 1RB_25	23060/704	1:1	0.108	0.083	-0.03	22.31	23	1.172	0.127	22.1	1.6
Front side	10M QPSK 25RB_0	23060/704	1:1	0.079	0.061	0.08	21.25	22	1.189	0.094	22.1	1.6
Back side	10M QPSK 1RB_25	23060/704	1:1	0.242	0.182	0.03	22.31	23	1.172	0.284	22.1	1.6
Back side	10M QPSK 25RB_0	23060/704	1:1	0.181	0.136	-0.05	21.25	22	1.189	0.215	22.1	1.6
Body worn Test data at the worst case with SIM2(Separate 10mm)												
Back side	10M QPSK 1RB_25	23060/704	1:1	0.221	0.168	0.04	22.31	23	1.172	0.259	22.1	1.6
Hotspot Test data with SIM1(Separate 10mm)												
Front side	10M QPSK 1RB_25	23060/704	1:1	0.108	0.083	-0.03	22.31	23	1.172	0.127	22.1	1.6
Front side	10M QPSK 25RB_0	23060/704	1:1	0.079	0.061	0.08	21.25	22	1.189	0.094	22.1	1.6
Back side	10M QPSK 1RB_25	23060/704	1:1	0.242	0.182	0.03	22.31	23	1.172	0.284	22.1	1.6
Back side	10M QPSK 25RB_0	23060/704	1:1	0.181	0.136	-0.05	21.25	22	1.189	0.215	22.1	1.6
Left side	10M QPSK 1RB_25	23060/704	1:1	0.073	0.053	-0.18	22.31	23	1.172	0.086	22.1	1.6
Left side	10M QPSK 25RB_0	23060/704	1:1	0.054	0.039	0	21.25	22	1.189	0.064	22.1	1.6
Right side	10M QPSK 1RB_25	23060/704	1:1	0.073	0.053	0.01	22.31	23	1.172	0.086	22.1	1.6
Right side	10M QPSK 25RB_0	23060/704	1:1	0.055	0.039	0.04	21.25	22	1.189	0.065	22.1	1.6
Bottom side	10M QPSK 1RB_25	23060/704	1:1	0.038	0.022	0.02	22.31	23	1.172	0.045	22.1	1.6
Bottom side	10M QPSK 25RB_0	23060/704	1:1	0.028	0.017	0.12	21.25	22	1.189	0.033	22.1	1.6
Hotspot Test data at the worst case with SIM2(Separate 10mm)												
Back side	10M QPSK 1RB_25	23060/704	1:1	0.221	0.168	0.04	22.31	23	1.172	0.259	22.1	1.6

Table 22: SAR Result of LTE Band 12

Note:

- The maximum Scaled SAR value is marked in bold. Graph results refer to Appendix B
- If the reported (scaled) SAR measured at the middle channel or highest output power channel for each test configuration is ≤ 0.8 W/kg then testing at the other channels is not required for such test configuration(s).

8.3.9 SAR Result Of LTE Band 25

Test position	Test mode	Test Ch./Freq.	Duty Cycle	SAR (W/kg) 1-g	SAR (W/kg) 10-g	Power Drift (dB)	Conducted power (dBm)	Tune up Limit (dBm)	Scaled factor	Scaled SAR (W/kg) 1-g	Liquid Temp.	SAR limit (W/kg)
Head Test data with SIM1												
Left cheek	20M QPSK 1RB_50	26365/1882.5	1:1	0.156	0.097	0.07	22.42	22.5	1.019	0.159	22.3	1.6
Left cheek	20M QPSK 50RB_0	26365/1882.5	1:1	0.124	0.078	0.05	21.25	21.5	1.059	0.131	22.3	1.6
Left tilted	20M QPSK 1RB_50	26365/1882.5	1:1	0.072	0.043	0.09	22.42	22.5	1.019	0.073	22.3	1.6
Left tilted	20M QPSK 50RB_0	26365/1882.5	1:1	0.064	0.035	0.12	21.25	21.5	1.059	0.068	22.3	1.6
Right cheek	20M QPSK 1RB_50	26365/1882.5	1:1	0.202	0.131	0.08	22.42	22.5	1.019	0.206	22.3	1.6
Right cheek	20M QPSK 50RB_0	26365/1882.5	1:1	0.156	0.101	0.05	21.25	21.5	1.059	0.165	22.3	1.6
Right tilted	20M QPSK 1RB_50	26365/1882.5	1:1	0.116	0.062	0.07	22.42	22.5	1.019	0.118	22.3	1.6
Right tilted	20M QPSK 50RB_0	26365/1882.5	1:1	0.098	0.044	0.16	21.25	21.5	1.059	0.104	22.3	1.6
Head Test data at the worst case with SIM2												
Right cheek	20M QPSK 1RB_50	26365/1882.5	1:1	0.199	0.128	0.05	22.42	22.5	1.019	0.203	22.3	1.6
Body worn Test data with SIM1(Separate 10mm)												
Front side	20M QPSK 1RB_50	26365/1882.5	1:1	0.267	0.152	0.13	22.42	22.5	1.019	0.272	22.3	1.6
Front side	20M QPSK 50RB_0	26365/1882.5	1:1	0.207	0.119	-0.09	21.25	21.5	1.059	0.219	22.3	1.6
Back side	20M QPSK 1RB_50	26365/1882.5	1:1	0.638	0.357	0.14	22.42	22.5	1.019	0.650	22.3	1.6
Back side	20M QPSK 50RB_0	26365/1882.5	1:1	0.496	0.277	0.17	21.25	21.5	1.059	0.525	22.3	1.6
Body worn Test data at the worst case with SIM2(Separate 10mm)												
Back side	20M QPSK 1RB_50	26365/1882.5	1:1	0.612	0.341	0.07	22.42	22.5	1.019	0.623	22.3	1.6
Hotspot Test data with SIM1(Separate 10mm)												
Front side	20M QPSK 1RB_50	26365/1882.5	1:1	0.267	0.152	0.13	22.42	22.5	1.019	0.272	22.3	1.6
Front side	20M QPSK 50RB_0	26365/1882.5	1:1	0.207	0.119	-0.09	21.25	21.5	1.059	0.219	22.3	1.6
Back side	20M QPSK 1RB_50	26365/1882.5	1:1	0.638	0.357	0.14	22.42	22.5	1.019	0.650	22.3	1.6
Back side	20M QPSK 50RB_0	26365/1882.5	1:1	0.496	0.277	0.17	21.25	21.5	1.059	0.525	22.3	1.6
Left side	20M QPSK 1RB_50	26365/1882.5	1:1	0.149	0.086	-0.02	22.42	22.5	1.019	0.152	22.3	1.6
Left side	20M QPSK 50RB_0	26365/1882.5	1:1	0.107	0.059	0.01	21.25	21.5	1.059	0.113	22.3	1.6
Right side	20M QPSK 1RB_50	26365/1882.5	1:1	0.137	0.081	0.08	22.42	22.5	1.019	0.140	22.3	1.6
Right side	20M QPSK 50RB_0	26365/1882.5	1:1	0.095	0.054	-0.04	21.25	21.5	1.059	0.101	22.3	1.6
Bottom side	20M QPSK 1RB_50	26365/1882.5	1:1	0.526	0.271	0.08	22.42	22.5	1.019	0.536	22.3	1.6
Bottom side	20M QPSK 50RB_0	26365/1882.5	1:1	0.398	0.205	0.05	21.25	21.5	1.059	0.422	22.3	1.6
Hotspot Test data at the worst case with SIM2(Separate 10mm)												
Back side	20M QPSK 1RB_50	26365/1882.5	1:1	0.612	0.341	0.07	22.42	22.5	1.019	0.623	22.3	1.6

Table 23: SAR Result of LTE Band 25

Note:

- 7) The maximum Scaled SAR value is marked in bold. Graph results refer to Appendix B
- 8) If the reported (scaled) SAR measured at the middle channel or highest output power channel for each test configuration is ≤ 0.8 W/kg then testing at the other channels is not required for such test configuration(s).

8.3.10 SAR Result Of LTE Band 26

Test position	Test mode	Test Ch./Freq.	Duty Cycle	SAR (W/kg) 1-g	SAR (W/kg) 10-g	Power Drift (dB)	Conducted power (dBm)	Tune up Limit (dBm)	Scaled factor	Scaled SAR (W/kg) 1-g	Liquid Temp.	SAR limit (W/kg)
Head Test data with SIM1												
Left cheek	15M QPSK 1RB_38	26765/821.5	1:1	0.201	0.154	0.16	23.05	24	1.245	0.250	22.1	1.6
Left cheek	15M QPSK 36RB_0	26765/821.5	1:1	0.151	0.116	0.07	22.15	23	1.216	0.184	22.1	1.6
Left tilted	15M QPSK 1RB_38	26765/821.5	1:1	0.112	0.088	0.11	23.05	24	1.245	0.139	22.1	1.6
Left tilted	15M QPSK 36RB_0	26765/821.5	1:1	0.085	0.066	0.12	22.15	23	1.216	0.103	22.1	1.6
Right cheek	15M QPSK 1RB_38	26765/821.5	1:1	0.223	0.172	0.12	23.05	24	1.245	0.278	22.1	1.6
Right cheek	15M QPSK 36RB_0	26765/821.5	1:1	0.165	0.128	0.02	22.15	23	1.216	0.201	22.1	1.6
Right tilted	15M QPSK 1RB_38	26765/821.5	1:1	0.124	0.095	0.03	23.05	24	1.245	0.154	22.1	1.6
Right tilted	15M QPSK 36RB_0	26765/821.5	1:1	0.092	0.07	0.18	22.15	23	1.216	0.112	22.1	1.6
Head Test data at the worst case with SIM2												
Right cheek	15M QPSK 1RB_38	26765/821.5	1:1	0.206	0.165	-0.04	23.05	24	1.245	0.256	22.1	1.6
Body worn Test data with SIM1(Separate 10mm)												
Front side	15M QPSK 1RB_38	26765/821.5	1:1	0.271	0.205	0.04	23.05	24	1.245	0.337	22.1	1.6
Front side	15M QPSK 36RB_0	26765/821.5	1:1	0.205	0.155	0.053	22.15	23	1.216	0.249	22.1	1.6
Back side	15M QPSK 1RB_38	26765/821.5	1:1	0.378	0.28	0.01	23.05	24	1.245	0.470	22.1	1.6
Back side	15M QPSK 36RB_0	26765/821.5	1:1	0.292	0.216	0.04	22.15	23	1.216	0.355	22.1	1.6
Body worn Test data at the worst case with SIM2(Separate 10mm)												
Back side	15M QPSK 1RB_38	26765/821.5	1:1	0.361	0.259	-0.15	23.05	24	1.245	0.449	22.1	1.6
Hotspot Test data with SIM1(Separate 10mm)												
Front side	15M QPSK 1RB_38	26765/821.5	1:1	0.271	0.205	0.04	23.05	24	1.245	0.337	22.1	1.6
Front side	15M QPSK 36RB_0	26765/821.5	1:1	0.205	0.155	0.053	22.15	23	1.216	0.249	22.1	1.6
Back side	15M QPSK 1RB_38	26765/821.5	1:1	0.378	0.28	0.01	23.05	24	1.245	0.470	22.1	1.6
Back side	15M QPSK 36RB_0	26765/821.5	1:1	0.292	0.216	0.04	22.15	23	1.216	0.355	22.1	1.6
Left side	15M QPSK 1RB_38	26765/821.5	1:1	0.235	0.164	0.02	23.05	24	1.245	0.292	22.1	1.6
Left side	15M QPSK 36RB_0	26765/821.5	1:1	0.177	0.124	0.02	22.15	23	1.216	0.215	22.1	1.6
Right side	15M QPSK 1RB_38	26765/821.5	1:1	0.246	0.172	-0.09	23.05	24	1.245	0.306	22.1	1.6
Right side	15M QPSK 36RB_0	26765/821.5	1:1	0.181	0.126	-0.08	22.15	23	1.216	0.220	22.1	1.6
Bottom side	15M QPSK 1RB_38	26765/821.5	1:1	0.039	0.023	0.08	23.05	24	1.245	0.049	22.1	1.6
Bottom side	15M QPSK 36RB_0	26765/821.5	1:1	0.031	0.018	0.02	22.15	23	1.216	0.038	22.1	1.6
Hotspot Test data at the worst case with SIM2(Separate 10mm)												
Back side	15M QPSK 1RB_38	26765/821.5	1:1	0.361	0.259	-0.15	23.05	24	1.245	0.449	22.1	1.6

Table 24: SAR Result of LTE Band 26

Note:

- 9) The maximum Scaled SAR value is marked in bold. Graph results refer to Appendix B
- 10) If the reported (scaled) SAR measured at the middle channel or highest output power channel for each test configuration is ≤ 0.8 W/kg then testing at the other channels is not required for such test configuration(s).

8.3.11 SAR Result Of LTE Band 38

Test position	Test mode	Test Ch./Freq.	Duty Cycle	SAR (W/kg) 1-g	SAR (W/kg) 10-g	Power Drift (dB)	Conducted Power (dBm)	Tune up Limit (dBm)	Scaled factor	Scaled SAR (W/kg) 1-g	Liquid Temp	SAR limit (W/kg)
Head Test data with SIM1												
Left cheek	20M QPSK 1RB_50	37850/2580	1:1	0.194	0.1	0.06	23.31	23.5	1.045	0.203	22.1	1.6
Left cheek	20M QPSK 50RB_0	37850/2580	1:1	0.144	0.074	0.01	22.12	22.5	1.091	0.157	22.1	1.6
Left tilted	20M QPSK 1RB_50	37850/2580	1:1	0.039	0.022	0.03	23.31	23.5	1.045	0.041	22.1	1.6
Left tilted	20M QPSK 50RB_0	37850/2580	1:1	0.033	0.02	0.17	22.12	22.5	1.091	0.036	22.1	1.6
Right cheek	20M QPSK 1RB_50	37850/2580	1:1	0.107	0.05	0.11	23.31	23.5	1.045	0.112	22.1	1.6
Right cheek	20M QPSK 50RB_0	37850/2580	1:1	0.066	0.032	-0.03	22.12	22.5	1.091	0.072	22.1	1.6
Right tilted	20M QPSK 1RB_50	37850/2580	1:1	0.021	0.012	0.01	23.31	23.5	1.045	0.022	22.1	1.6
Right tilted	20M QPSK 50RB_0	37850/2580	1:1	0.009	0.005	-0.04	22.12	22.5	1.091	0.010	22.1	1.6
Head Test data at the worst case with SIM2												
Left cheek	20M QPSK 1RB_50	37850/2580	1:1	0.189	0.095	0.04	23.31	23.5	1.045	0.197	22.1	1.6
Body worn Test data with SIM1(Separate 10mm)												
Front side	20M QPSK 1RB_50	37850/2580	1:1	0.103	0.053	-0.15	23.31	23.5	1.045	0.108	22.1	1.6
Front side	20M QPSK 50RB_0	37850/2580	1:1	0.095	0.048	0.14	22.12	22.5	1.091	0.104	22.1	1.6
Back side	20M QPSK 1RB_50	37850/2580	1:1	0.326	0.161	0.08	23.31	23.5	1.045	0.341	22.1	1.6
Back side	20M QPSK 50RB_0	37850/2580	1:1	0.26	0.128	0.03	22.12	22.5	1.091	0.284	22.1	1.6
Body worn Test data at the worst case with SIM2(Separate 10mm)												
Back side	20M QPSK 1RB_50	37850/2580	1:1	0.311	0.152	-0.01	23.31	23.5	1.045	0.325	22.1	1.6
Hotspot Test data with SIM1(Separate 10mm)												
Front side	20M QPSK 1RB_50	37850/2580	1:1	0.103	0.053	-0.15	23.31	23.5	1.045	0.108	22.1	1.6
Front side	20M QPSK 50RB_0	37850/2580	1:1	0.095	0.048	0.14	22.12	22.5	1.091	0.104	22.1	1.6
Back side	20M QPSK 1RB_50	37850/2580	1:1	0.326	0.161	0.08	23.31	23.5	1.045	0.341	22.1	1.6
Back side	20M QPSK 50RB_0	37850/2580	1:1	0.26	0.128	0.03	22.12	22.5	1.091	0.284	22.1	1.6
Left side	20M QPSK 1RB_50	37850/2580	1:1	0.09	0.048	0.02	23.31	23.5	1.045	0.094	22.1	1.6
Left side	20M QPSK 50RB_0	37850/2580	1:1	0.078	0.04	0.06	22.12	22.5	1.091	0.085	22.1	1.6
Right side	20M QPSK 1RB_50	37850/2580	1:1	0.024	0.011	-0.02	23.31	23.5	1.045	0.025	22.1	1.6
Right side	20M QPSK 50RB_0	37850/2580	1:1	0.019	0.009	0.01	22.12	22.5	1.091	0.021	22.1	1.6
Bottom side	20M QPSK 1RB_50	37850/2580	1:1	0.259	0.13	0.02	23.31	23.5	1.045	0.271	22.1	1.6
Bottom side	20M QPSK 50RB_0	37850/2580	1:1	0.203	0.101	0.18	22.12	22.5	1.091	0.222	22.1	1.6
Hotspot Test data at the worst case with SIM2(Separate 10mm)												
Back side	20M QPSK 1RB_50	37850/2580	1:1	0.311	0.152	-0.01	23.31	23.5	1.045	0.325	22.1	1.6

Table 25: SAR Result of LTE Band 38

Note:

- 11) The maximum Scaled SAR value is marked in bold. Graph results refer to Appendix B
- 12) If the reported (scaled) SAR measured at the middle channel or highest output power channel for each test configuration is ≤ 0.8 W/kg then testing at the other channels is not required for such test configuration(s).

8.3.12SAR Result Of LTE Band 41

Test position	Test mode	Test Ch./Freq.	Duty Cycle	SAR (W/kg) 1-g	SAR (W/kg) 10-g	Power Drift (dB)	Conducted Power (dBm)	Tune up Limit (dBm)	Scaled factor	Scaled SAR (W/kg) 1-g	Liquid Temp	SAR limit (W/kg)
Head Test data with SIM1												
Left cheek	20M QPSK 1RB_50	41140/2645	1:1	0.158	0.08	0.06	23.9	24	1.023	0.162	22.1	1.6
Left cheek	20M QPSK 50RB_0	41140/2645	1:1	0.128	0.065	0.02	22.92	23	1.019	0.130	22.1	1.6
Left tilted	20M QPSK 1RB_50	41140/2645	1:1	0.024	0.012	0.08	23.9	24	1.023	0.025	22.1	1.6
Left tilted	20M QPSK 50RB_0	41140/2645	1:1	0.021	0.01	0.16	22.92	23	1.019	0.021	22.1	1.6
Right cheek	20M QPSK 1RB_50	41140/2645	1:1	0.088	0.042	-0.05	23.9	24	1.023	0.090	22.1	1.6
Right cheek	20M QPSK 50RB_0	41140/2645	1:1	0.079	0.039	0.1	22.92	23	1.019	0.080	22.1	1.6
Right tilted	20M QPSK 1RB_50	41140/2645	1:1	0.035	0.018	0.05	23.9	24	1.023	0.036	22.1	1.6
Right tilted	20M QPSK 50RB_0	41140/2645	1:1	0.031	0.016	0.02	22.92	23	1.019	0.032	22.1	1.6
Head Test data at the worst case with SIM2												
Left cheek	20M QPSK 1RB_50	41140/2645	1:1	0.152	0.076	0.13	23.9	24	1.023	0.156	22.1	1.6
Body worn Test data with SIM1(Separate 10mm)												
Front side	20M QPSK 1RB_50	41140/2645	1:1	0.073	0.037	0.09	23.9	24	1.023	0.075	22.1	1.6
Front side	20M QPSK 50RB_0	41140/2645	1:1	0.065	0.032	0.13	22.92	23	1.019	0.066	22.1	1.6
Back side	20M QPSK 1RB_50	41140/2645	1:1	0.216	0.102	0.02	23.9	24	1.023	0.221	22.1	1.6
Back side	20M QPSK 50RB_0	41140/2645	1:1	0.18	0.085	0.04	22.92	23	1.019	0.183	22.1	1.6
Body worn Test data at the worst case with SIM2(Separate 10mm)												
Back side	20M QPSK 1RB_50	41140/2645	1:1	0.201	0.094	0.06	23.9	24	1.023	0.206	22.1	1.6
Hotspot Test data with SIM1(Separate 10mm)												
Front side	20M QPSK 1RB_50	41140/2645	1:1	0.073	0.037	0.09	23.9	24	1.023	0.075	22.1	1.6
Front side	20M QPSK 50RB_0	41140/2645	1:1	0.065	0.032	0.13	22.92	23	1.019	0.066	22.1	1.6
Back side	20M QPSK 1RB_50	41140/2645	1:1	0.216	0.102	0.02	23.9	24	1.023	0.221	22.1	1.6
Back side	20M QPSK 50RB_0	41140/2645	1:1	0.18	0.085	0.04	22.92	23	1.019	0.183	22.1	1.6
Left side	20M QPSK 1RB_50	41140/2645	1:1	0.083	0.042	0.08	23.9	24	1.023	0.085	22.1	1.6
Left side	20M QPSK 50RB_0	41140/2645	1:1	0.069	0.037	0.04	22.92	23	1.019	0.070	22.1	1.6
Right side	20M QPSK 1RB_50	41140/2645	1:1	0.018	0.009	0.03	23.9	24	1.023	0.018	22.1	1.6
Right side	20M QPSK 50RB_0	41140/2645	1:1	0.015	0.007	-0.05	22.92	23	1.019	0.015	22.1	1.6
Bottom side	20M QPSK 1RB_50	41140/2645	1:1	0.137	0.068	0.17	23.9	24	1.023	0.140	22.1	1.6
Bottom side	20M QPSK 50RB_0	41140/2645	1:1	0.118	0.059	0.02	22.92	23	1.019	0.120	22.1	1.6
Hotspot Test data at the worst case with SIM2(Separate 10mm)												
Back side	20M QPSK 1RB_50	41140/2645	1:1	0.201	0.094	0.06	23.9	24	1.023	0.206	22.1	1.6

Table 26: SAR Result of LTE Band 41

Note:

- 1) The maximum Scaled SAR value is marked in bold. Graph results refer to Appendix B
- 2) If the reported (scaled) SAR measured at the middle channel or highest output power channel for each test configuration is ≤ 0.8 W/kg then testing at the other channels is not required for such test configuration(s).

- 3) Testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is:
- a) ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz
 - b) ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
 - c) ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz

8.3.13 SAR Result Of LTE Band 66

Test position	Test mode	Test Ch./Freq.	Duty Cycle	SAR (W/kg) 1-g	SAR (W/kg) 10-g	Power Drift (dB)	Conducted Power (dBm)	Tune up Limit (dBm)	Scaled factor	Scaled SAR (W/kg) 1-g	Liquid Temp	SAR limit (W/kg)
Head Test data with SIM1												
Left cheek	20M QPSK 1RB_50	132072/1720	1:1	0.277	0.167	-0.02	23.07	23.5	1.104	0.306	22.1	1.6
Left cheek	20M QPSK 50RB_50	132072/1720	1:1	0.221	0.134	0.05	22.05	22.5	1.109	0.245	22.1	1.6
Left tilted	20M QPSK 1RB_50	132072/1720	1:1	0.084	0.054	-0.02	23.07	23.5	1.104	0.093	22.1	1.6
Left tilted	20M QPSK 50RB_50	132072/1720	1:1	0.065	0.041	0.04	22.05	22.5	1.109	0.072	22.1	1.6
Right cheek	20M QPSK 1RB_50	132072/1720	1:1	0.199	0.129	0.05	23.07	23.5	1.104	0.220	22.1	1.6
Right cheek	20M QPSK 50RB_50	132072/1720	1:1	0.145	0.094	0.02	22.05	22.5	1.109	0.161	22.1	1.6
Right tilted	20M QPSK 1RB_50	132072/1720	1:1	0.117	0.074	-0.02	23.07	23.5	1.104	0.129	22.1	1.6
Right tilted	20M QPSK 50RB_50	132072/1720	1:1	0.092	0.057	0.09	22.05	22.5	1.109	0.102	22.1	1.6
Head Test data at the worst case with SIM2												
Left cheek	20M QPSK 1RB_50	132072/1720	1:1	0.259	0.154	0.11	23.07	23.5	1.104	0.286	22.1	1.6
Body worn Test data with SIM1(Separate 10mm)												
Front side	20M QPSK 1RB_50	132072/1720	1:1	0.208	0.125	0.18	23.07	23.5	1.104	0.230	22.1	1.6
Front side	20M QPSK 50RB_50	132072/1720	1:1	0.178	0.106	0.08	22.05	22.5	1.109	0.197	22.1	1.6
Back side	20M QPSK 1RB_50	132072/1720	1:1	0.571	0.35	-0.07	23.07	23.5	1.104	0.630	22.1	1.6
Back side	20M QPSK 50RB_50	132072/1720	1:1	0.457	0.28	-0.1	22.05	22.5	1.109	0.507	22.1	1.6
Body worn Test data at the worst case with SIM2(Separate 10mm)												
Back side	20M QPSK 1RB_50	132072/1720	1:1	0.554	0.337	-0.12	23.07	23.5	1.104	0.612	22.1	1.6
Hotspot Test data with SIM1(Separate 10mm)												
Front side	20M QPSK 1RB_50	132072/1720	1:1	0.208	0.125	0.18	23.07	23.5	1.104	0.230	22.1	1.6
Front side	20M QPSK 50RB_50	132072/1720	1:1	0.178	0.106	0.08	22.05	22.5	1.109	0.197	22.1	1.6
Back side	20M QPSK 1RB_50	132072/1720	1:1	0.571	0.35	-0.07	23.07	23.5	1.104	0.630	22.1	1.6
Back side	20M QPSK 50RB_50	132072/1720	1:1	0.457	0.28	-0.1	22.05	22.5	1.109	0.507	22.1	1.6
Left side	20M QPSK 1RB_50	132072/1720	1:1	0.081	0.05	0.14	23.07	23.5	1.104	0.089	22.1	1.6
Left side	20M QPSK 50RB_50	132072/1720	1:1	0.062	0.037	-0.05	22.05	22.5	1.109	0.069	22.1	1.6
Right side	20M QPSK 1RB_50	132072/1720	1:1	0.129	0.071	0.04	23.07	23.5	1.104	0.142	22.1	1.6
Right side	20M QPSK 50RB_50	132072/1720	1:1	0.101	0.059	0.04	22.05	22.5	1.109	0.112	22.1	1.6
Bottom side	20M QPSK 1RB_50	132072/1720	1:1	0.511	0.275	-0.07	23.07	23.5	1.104	0.564	22.1	1.6
Bottom side	20M QPSK 50RB_50	132072/1720	1:1	0.402	0.218	0.05	22.05	22.5	1.109	0.446	22.1	1.6
Hotspot Test data at the worst case with SIM2(Separate 10mm)												
Back side	20M QPSK 1RB_50	132072/1720	1:1	0.554	0.337	-0.12	23.07	23.5	1.104	0.612	22.1	1.6

Table 27: SAR Result of LTE Band 66

Note:

13) The maximum Scaled SAR value is marked in bold. Graph results refer to Appendix B

14) If the reported (scaled) SAR measured at the middle channel or highest output power channel for each test configuration is ≤ 0.8 W/kg then testing at the other channels is not required for such test configuration(s).

8.3.14 SAR Result Of 2.4GHz Wi-Fi

Test position	Test mode	Test Ch./Freq.	Duty Cycle	Duty Cycle Scaled factor	SAR (W/kg) 1-g	SAR (W/kg) 10-g	Power drift (dB)	Conducted power (dBm)	Tune up Limit (dBm)	Scaled factor	Scaled SAR 1-g (W/kg)	Liquid Temp.
Head Test data												
Left cheek	802.11b	1/2412	99.29%	1.007	0.222	0.108	0.06	16.35	16.50	1.035	0.231	22.0
Left tilted	802.11b	1/2412	99.29%	1.007	0.095	0.053	-0.18	16.35	16.50	1.035	0.099	22.0
Right cheek	802.11b	1/2412	99.29%	1.007	0.112	0.065	-0.04	16.35	16.50	1.035	0.117	22.0
Right tilted	802.11b	1/2412	99.29%	1.007	0.058	0.033	0.13	16.35	16.50	1.035	0.060	22.0
Body worn Test data (Separate 10mm)												
Front side	802.11b	1/2412	99.29%	1.007	0.039	0.020	-0.07	16.35	16.50	1.035	0.041	22.0
Back side	802.11b	1/2412	99.29%	1.007	0.088	0.045	0.03	16.35	16.50	1.035	0.092	22.0
Hotspot Test data (Separate 10mm)												
Front side	802.11b	1/2412	99.29%	1.007	0.039	0.020	-0.07	16.35	16.50	1.035	0.041	22.0
Back side	802.11b	1/2412	99.29%	1.007	0.088	0.045	0.03	16.35	16.50	1.035	0.092	22.0
Right side	802.11b	1/2412	99.29%	1.007	0.127	0.067	-0.11	16.35	16.50	1.035	0.132	22.0
Top side	802.11b	1/2412	99.29%	1.007	0.017	0.008	0.06	16.35	16.50	1.035	0.018	22.0

Table 28: SAR Result Of 2.4GHz Wi-Fi

Note:

- 1) The maximum Scaled SAR value is marked in bold. Graph results refer to Appendix B
- 2) If the reported (scaled) SAR measured at the middle channel or highest output power channel for each test configuration is ≤ 0.8 W/kg then testing at the other channels is not required for such test configuration(s). Per Kdb248227 D01, When the reported SAR is > 0.8 W/kg, SAR is required for that exposure configuration using the next highest measured output power channel.
- 3) Each channel was tested at the lowest data rate.
- 4) Per KDB248227 D01, for Body SAR test of Wi-Fi 2.4G, SAR is measured for 2.4 GHz 802.11b DSSS using the initial test position procedure. The highest reported SAR for DSSS is adjusted by the ratio of OFDM 802.11g/n to DSSS specified maximum output power and the adjusted SAR is < 1.2 W/kg, so SAR for 802.11g/n is not required.

8.3.15 SAR Result Of Bluetooth

Test position	Test mode	Test Ch./Freq.	Duty Cycle	Duty Cycle Scaled factor	SAR (W/kg) 1-g	SAR (W/kg) 10-g	Power drift (dB)	Conducted power (dBm)	Tune up Limit (dBm)	Scaled factor	Scaled SAR 1-g (W/kg)	Liquid Temp.
Head Test data												
Left cheek	GFSK	0/2402	76.20%	1.312	0.042	0.023	0.01	12.95	13	1.012	0.056	22.0
Left tilted	GFSK	0/2402	76.20%	1.312	0.020	0.009	0.03	12.95	13	1.012	0.027	22.0
Right cheek	GFSK	0/2402	76.20%	1.312	0.021	0.012	-0.06	12.95	13	1.012	0.028	22.0
Right tilted	GFSK	0/2402	76.20%	1.312	0.012	0.006	0.05	12.95	13	1.012	0.016	22.0
Body worn Test data (Separate 10mm)												
Front side	GFSK	0/2402	76.20%	1.312	0.006	0.002	0.00	12.95	13	1.012	0.008	22.0
Back side	GFSK	0/2402	76.20%	1.312	0.013	0.006	0.02	12.95	13	1.012	0.017	22.0
Hotspot Test data (Separate 10mm)												
Front side	GFSK	0/2402	76.20%	1.312	0.006	0.002	0.00	12.95	13	1.012	0.008	22.0
Back side	GFSK	0/2402	76.20%	1.312	0.013	0.006	0.02	12.95	13	1.012	0.017	22.0
Right side	GFSK	0/2402	76.20%	1.312	0.024	0.011	-0.08	12.95	13	1.012	0.032	22.0
Top side	GFSK	0/2402	76.20%	1.312	0.005	0.001	-0.01	12.95	13	1.012	0.007	22.0

Table 29: SAR Result Of Bluetooth

Note:

- 1) The maximum Scaled SAR value is marked in bold. Graph results refer to Appendix B
- 2) If the reported (scaled) SAR measured at the middle channel or highest output power channel for each test configuration is ≤ 0.8 W/kg then testing at the other channels is not required for such test configuration(s). Per Kdb248227 D01, When the reported SAR is > 0.8 W/kg, SAR is required for that exposure configuration using the next highest measured output power channel.

8.3.16 SAR Result Of 5GHz Wi-Fi

Test position	Test mode	Test Ch./Freq.	Duty Cycle %	Duty Cycle Scaled factor	SAR (W/kg) 1-g	SAR (W/kg) 10-g	Power drift (dB)	Conducted power (dBm)	Tune up Limit (dBm)	Scaled factor	Scaled SAR (W/kg) 1-g	Liquid Temp.	SAR limit (W/kg)
Head Test data U-NII-2A													
Left cheek	802.11a	52/5260	96.17	1.040	0.158	0.047	-0.01	15.22	15.5	1.067	0.175	22.2	1.6
Left tilted	802.11a	52/5260	96.17	1.040	0.097	0.031	-0.13	15.22	15.5	1.067	0.108	22.2	1.6
Right cheek	802.11a	52/5260	96.17	1.040	0.003	0.001	-0.04	15.22	15.5	1.067	0.003	22.2	1.6
Right tilted	802.11a	52/5260	96.17	1.040	0.008	0	0.06	15.22	15.5	1.067	0.009	22.2	1.6
Head Test data U-NII-3													
Left cheek	802.11a	149/5745	96.17	1.040	0.108	0.029	0.02	14.51	15	1.119	0.126	22.2	1.6
Left tilted	802.11a	149/5745	96.17	1.040	0.101	0.028	-0.12	14.51	15	1.119	0.118	22.2	1.6
Right cheek	802.11a	149/5745	96.17	1.040	0.07	0.02	0.03	14.51	15	1.119	0.081	22.2	1.6
Right tilted	802.11a	149/5745	96.17	1.040	0.069	0.021	0.06	14.51	15	1.119	0.080	22.2	1.6
Body worn Test data U-NII-2A(Separate 10mm)													
Front side	802.11a	52/5260	96.17	1.040	0.025	0.008	0	15.22	15.5	1.067	0.028	22.2	1.6
Back side	802.11a	52/5260	96.17	1.040	0.073	0.022	-0.01	15.22	15.5	1.067	0.081	22.2	1.6
Body worn Test data U-NII-2A(Separate 10mm)													
Front side	802.11a	149/5745	96.17	1.040	0.022	0.006	0.05	14.51	15	1.119	0.026	22.2	1.6
Back side	802.11a	149/5745	96.17	1.040	0.117	0.039	0.01	14.51	15	1.119	0.136	22.2	1.6
Hotspot Test data U-NII-1(Separate 10mm)													
Front side	802.11a	48/5240	96.17	1.040	0.024	0.008	0	15.05	15.5	1.109	0.028	22.2	1.6
Back side	802.11a	48/5240	96.17	1.040	0.07	0.021	0.03	15.05	15.5	1.109	0.081	22.2	1.6
Right side	802.11a	48/5240	96.17	1.040	0.055	0.018	0.17	15.05	15.5	1.109	0.063	22.2	1.6
Top side	802.11a	48/5240	96.17	1.040	0.026	0.009	0.04	15.05	15.5	1.109	0.030	22.2	1.6
Hotspot Test data U-NII-3(Separate 10mm)													
Front side	802.11a	149/5745	96.17	1.040	0.022	0.006	0.05	14.51	15	1.119	0.026	22.2	1.6
Back side	802.11a	149/5745	96.17	1.040	0.117	0.039	0.01	14.51	15	1.119	0.136	22.2	1.6
Right side	802.11a	149/5745	96.17	1.040	0.021	0.009	0.02	14.51	15	1.119	0.024	22.2	1.6
Top side	802.11a	149/5745	96.17	1.040	0.026	0.009	0.06	14.51	15	1.119	0.030	22.2	1.6

Table 30: SAR Result Of 5GHz Wi-Fi

Note:

- 1) The maximum Scaled SAR value is marked in bold. Graph results refer to Appendix B
- 2) If the reported (scaled) SAR measured at the middle channel or highest output power channel for each test configuration is ≤ 0.8 W/kg then testing at the other channels is not required for such test configuration(s). Per Kdb248227 D01, When the reported SAR is > 0.8 W/kg, SAR is required for that exposure configuration using the next highest measured output power channel.
- 3) Each channel was tested at the lowest data rate.
- 4) When the same maximum output power is specified for both bands, begin SAR measurement in U-NII-2A band by applying the OFDM SAR requirements. As the highest reported SAR for a test configuration is ≤ 1.2 W/kg, SAR is not required for U-NII-1 band for that configuration.

- 5) When the highest reported SAR for the initial test configuration is adjusted by the ratio of the subsequent test configuration to initial test configuration specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg, SAR test for the other 802.11 modes are not required.

8.3.17 Repeat SAR Measurement

Band	Mode	Test Position	Test Ch./Freq.	Original Measured SAR1g (mW/g)	1st Repeated SAR1g (mW/g)	Ratio
LTE Band 7	20M QPSK 1RB_50	Back side	21100/2535.5	1.18	1.14	-3.39

Note:

- 1) Per KDB 865664 D01v01, for each frequency band, repeated SAR measurement is required only when the measured SAR is $\geq 0.8\text{W/Kg}$
- 2) Per KDB 865664 D01v01, if the ratio of largest to smallest SAR for the original and first repeated measurement is ≤ 1.2 and the measured SAR $< 1.45\text{W/Kg}$, only one repeated measurement is required
- 3) The ratio is the difference in percentage between original and repeated measured SAR.

8.4 Multiple Transmitter Evaluation

8.4.1 Simultaneous SAR SAR test evaluation

Simultaneous Transmission

NO.	Simultaneous Transmission Configuration	Head	Body	Hotspot
1	GSM(Voice) + WiFi	Yes	Yes	No
2	GSM(Voice) + BT	Yes	Yes	No
3	WCDMA(Voice) + WiFi	Yes	Yes	No
4	WCDMA(Voice) + BT	Yes	Yes	No
5	GPRS / EDGE(Data) + WiFi	No	Yes	Yes
6	GPRS / EDGE(Data) + BT	No	Yes	Yes
7	WCDMA(Data) + WiFi	No	Yes	Yes
8	WCDMA(Data) + BT	No	Yes	Yes
9	LTE(Data) + WiFi	Yes	Yes	Yes
10	LTE(Data) + BT	Yes	Yes	Yes
11	BT+WIFI	No	No	No

Note:

1) Wi-Fi and Bluetooth share the same Tx antenna and can't transmit simultaneously.

1) Simultaneous Transmission SAR Summation Scenario for head

WWAN Band	Exposure position	①MAX. WWAN SAR (W/kg)	②MAX. WLAN 2.4GHz SAR (W/kg)	③MAX. WLAN 5GHz SAR (W/kg)	④ MAX. BT SAR (W/kg)	Summed SAR ①+②	Summed SAR ①+③	Summed SAR ①+④	Case NO.
GSM850	Left cheek	0.284	0.231	0.175	0.056	0.515	0.459	0.340	No
	Left Tilted	0.141	0.099	0.118	0.027	0.240	0.259	0.168	No
	Right cheek	0.310	0.117	0.081	0.028	0.427	0.391	0.338	No
	Right Tilted	0.150	0.060	0.080	0.016	0.210	0.230	0.166	No
GSM1900	Left cheek	0.146	0.231	0.175	0.056	0.377	0.321	0.202	No
	Left Tilted	0.066	0.099	0.118	0.027	0.165	0.184	0.093	No
	Right cheek	0.181	0.117	0.081	0.028	0.298	0.262	0.209	No
	Right Tilted	0.108	0.060	0.080	0.016	0.168	0.188	0.124	No
WCDMA Band II	Left cheek	0.160	0.231	0.175	0.056	0.391	0.335	0.216	No
	Left Tilted	0.070	0.099	0.118	0.027	0.169	0.188	0.097	No
	Right cheek	0.178	0.117	0.081	0.028	0.295	0.259	0.206	No
	Right Tilted	0.100	0.060	0.080	0.016	0.160	0.180	0.116	No
WCDMA Band V	Left cheek	0.236	0.231	0.175	0.056	0.467	0.411	0.292	No
	Left Tilted	0.126	0.099	0.118	0.027	0.225	0.244	0.153	No
	Right cheek	0.253	0.117	0.081	0.028	0.370	0.334	0.281	No
	Right Tilted	0.128	0.060	0.080	0.016	0.188	0.208	0.144	No
WCDMA Band IV	Left cheek	0.274	0.231	0.175	0.056	0.505	0.449	0.330	No
	Left Tilted	0.048	0.099	0.118	0.027	0.147	0.166	0.075	No
	Right cheek	0.141	0.117	0.081	0.028	0.258	0.222	0.169	No
	Right Tilted	0.097	0.060	0.080	0.016	0.157	0.177	0.113	No
LTE Band 2	Left cheek	0.164	0.231	0.175	0.056	0.395	0.339	0.220	No
	Left Tilted	0.075	0.099	0.118	0.027	0.174	0.193	0.102	No
	Right cheek	0.209	0.117	0.081	0.028	0.326	0.290	0.237	No
	Right Tilted	0.122	0.060	0.080	0.016	0.182	0.202	0.138	No
LTE Band 7	Left cheek	0.575	0.231	0.175	0.056	0.806	0.750	0.631	No
	Left Tilted	0.097	0.099	0.118	0.027	0.196	0.215	0.124	No
	Right cheek	0.288	0.117	0.081	0.028	0.405	0.369	0.316	No
	Right Tilted	0.098	0.060	0.080	0.016	0.158	0.178	0.114	No
LTE Band 12	Left cheek	0.134	0.231	0.175	0.056	0.365	0.309	0.190	No
	Left Tilted	0.073	0.099	0.118	0.027	0.172	0.191	0.100	No
	Right cheek	0.149	0.117	0.081	0.028	0.266	0.230	0.177	No
	Right Tilted	0.077	0.060	0.080	0.016	0.137	0.157	0.093	No

LTE Band 25	Left cheek	0.159	0.231	0.175	0.056	0.390	0.334	0.215	No
	Left Tilted	0.073	0.099	0.118	0.027	0.172	0.191	0.100	No
	Right cheek	0.206	0.117	0.081	0.028	0.323	0.287	0.234	No
	Right Tilted	0.118	0.060	0.080	0.016	0.178	0.198	0.134	No
LTE Band 26	Left cheek	0.250	0.231	0.175	0.056	0.481	0.425	0.306	No
	Left Tilted	0.139	0.099	0.118	0.027	0.238	0.257	0.166	No
	Right cheek	0.278	0.117	0.081	0.028	0.395	0.359	0.306	No
	Right Tilted	0.154	0.060	0.080	0.016	0.214	0.234	0.170	No
LTE Band 38	Left cheek	0.203	0.231	0.175	0.056	0.434	0.378	0.259	No
	Left Tilted	0.041	0.099	0.118	0.027	0.140	0.159	0.068	No
	Right cheek	0.112	0.117	0.081	0.028	0.229	0.193	0.140	No
	Right Tilted	0.022	0.060	0.080	0.016	0.082	0.102	0.038	No
LTE Band 41	Left cheek	0.162	0.231	0.175	0.056	0.393	0.337	0.218	No
	Left Tilted	0.025	0.099	0.118	0.027	0.124	0.143	0.052	No
	Right cheek	0.090	0.117	0.081	0.028	0.207	0.171	0.118	No
	Right Tilted	0.036	0.060	0.080	0.016	0.096	0.116	0.052	No
LTE Band 66	Left cheek	0.306	0.231	0.175	0.056	0.537	0.481	0.362	No
	Left Tilted	0.093	0.099	0.118	0.027	0.192	0.211	0.120	No
	Right cheek	0.220	0.117	0.081	0.028	0.337	0.301	0.248	No
	Right Tilted	0.129	0.060	0.080	0.016	0.189	0.209	0.145	No

2) Simultaneous Transmission SAR Summation Scenario for body worn

WWAN Band	Exposure position	①MAX. WWAN SAR (W/kg)	②MAX. WLAN 2.4GHz SAR (W/kg)	③MAX. WLAN 5GHz SAR (W/kg)	④MAX. BT SAR (W/kg)	Summed SAR ①+②	Summed SAR ①+③	Summed SAR ①+④	Case NO.
GSM850	Front	0.462	0.041	0.028	0.008	0.503	0.490	0.470	No
	Back	0.646	0.092	0.136	0.017	0.738	0.782	0.663	No
GSM1900	Front	0.244	0.041	0.028	0.008	0.285	0.272	0.252	No
	Back	0.613	0.092	0.136	0.017	0.705	0.749	0.630	No
WCDMA Band II	Front	0.246	0.041	0.028	0.008	0.287	0.274	0.254	No
	Back	0.602	0.092	0.136	0.017	0.694	0.738	0.619	No
WCDMA Band V	Front	0.314	0.041	0.028	0.008	0.355	0.342	0.322	No
	Back	0.387	0.092	0.136	0.017	0.479	0.523	0.404	No
WCDMA Band IV	Front	0.218	0.041	0.028	0.008	0.259	0.246	0.226	No
	Back	0.576	0.092	0.136	0.017	0.668	0.712	0.593	No
LTE Band 2	Front	0.271	0.041	0.028	0.008	0.312	0.299	0.279	No
	Back	0.659	0.092	0.136	0.017	0.751	0.795	0.676	No
LTE Band 7	Front	0.282	0.041	0.028	0.008	0.323	0.310	0.290	No
	Back	1.253	0.092	0.136	0.017	1.345	1.389	1.270	No
LTE Band 12	Front	0.127	0.041	0.028	0.008	0.168	0.155	0.135	No
	Back	0.284	0.092	0.136	0.017	0.376	0.420	0.301	No
LTE Band 25	Front	0.272	0.041	0.028	0.008	0.313	0.300	0.280	No
	Back	0.650	0.092	0.136	0.017	0.742	0.786	0.667	No
LTE Band 26	Front	0.337	0.041	0.028	0.008	0.378	0.365	0.345	No
	Back	0.470	0.092	0.136	0.017	0.562	0.606	0.487	No
LTE Band 38	Front	0.108	0.041	0.028	0.008	0.149	0.136	0.116	No
	Back	0.341	0.092	0.136	0.017	0.433	0.477	0.358	No
LTE Band 41	Front	0.075	0.041	0.028	0.008	0.116	0.103	0.083	No
	Back	0.221	0.092	0.136	0.017	0.313	0.357	0.238	No
LTE Band 66	Front	0.230	0.041	0.028	0.008	0.271	0.258	0.238	No
	Back	0.630	0.092	0.136	0.017	0.722	0.766	0.647	No

3) Simultaneous Transmission SAR Summation Scenario for hotspot

WWAN Band	Exposure position	①MAX. WWAN SAR (W/kg)	②MAX. WLAN 2.4GHz SAR (W/kg)	③MAX. WLAN 5GHz SAR (W/kg)	③MAX. BT SAR (W/kg)	Summed SAR ①+②	Summed SAR ①+③	Summed SAR ①+④	Case NO.
GSM850	Front	0.462	0.041	0.028	0.008	0.503	0.490	0.470	No
	Back	0.646	0.092	0.136	0.017	0.738	0.782	0.663	No
	Left	0.342	0.000	0.000	0.000	0.342	0.342	0.342	No
	Right	0.357	0.132	0.063	0.032	0.489	0.420	0.389	No
	Top	0.000	0.018	0.030	0.007	0.018	0.030	0.007	No
	Bottom	0.085	0.000	0.000	0.000	0.085	0.085	0.085	No
GSM1900	Front	0.244	0.041	0.028	0.008	0.285	0.272	0.252	No
	Back	0.613	0.092	0.136	0.017	0.705	0.749	0.630	No
	Left	0.133	0.000	0.000	0.000	0.133	0.133	0.133	No
	Right	0.111	0.132	0.063	0.032	0.243	0.174	0.143	No
	Top	0.000	0.018	0.030	0.007	0.018	0.030	0.007	No
	Bottom	0.410	0.000	0.000	0.000	0.410	0.410	0.410	No
WCDMA Band II	Front	0.246	0.041	0.028	0.008	0.287	0.274	0.254	No
	Back	0.602	0.092	0.136	0.017	0.694	0.738	0.619	No
	Left	0.177	0.000	0.000	0.000	0.177	0.177	0.177	No
	Right	0.117	0.132	0.063	0.032	0.249	0.180	0.149	No
	Top	0.000	0.018	0.030	0.007	0.018	0.030	0.007	No
	Bottom	0.446	0.000	0.000	0.000	0.446	0.446	0.446	No
WCDMA Band IV	Front	0.000	0.041	0.028	0.008	0.041	0.028	0.008	No
	Back	0.575	0.092	0.136	0.017	0.667	0.711	0.592	No
	Left	0.000	0.000	0.000	0.000	0.000	0.000	0.000	No
	Right	0.000	0.132	0.063	0.032	0.132	0.063	0.032	No
	Top	0.000	0.018	0.030	0.007	0.018	0.030	0.007	No
	Bottom	0.236	0.000	0.000	0.000	0.236	0.236	0.236	No
WCDMA Band V	Front	0.314	0.041	0.028	0.008	0.355	0.342	0.322	No
	Back	0.387	0.092	0.136	0.017	0.479	0.523	0.404	No
	Left	0.264	0.000	0.000	0.000	0.264	0.264	0.264	No
	Right	0.251	0.132	0.063	0.032	0.383	0.314	0.283	No
	Top	0.000	0.018	0.030	0.007	0.018	0.030	0.007	No
	Bottom	0.043	0.000	0.000	0.000	0.043	0.043	0.043	No
LTE Band IV	Front	0.218	0.041	0.028	0.008	0.259	0.246	0.226	No
	Back	0.576	0.092	0.136	0.017	0.668	0.712	0.593	No

	Left	0.168	0.000	0.000	0.000	0.168	0.168	0.168	No
	Right	0.189	0.132	0.063	0.032	0.321	0.252	0.221	No
	Top	0.000	0.018	0.030	0.007	0.018	0.030	0.007	No
	Bottom	0.412	0.000	0.000	0.000	0.412	0.412	0.412	No
LTE Band 2	Front	0.271	0.041	0.028	0.008	0.312	0.299	0.279	No
	Back	0.659	0.092	0.136	0.017	0.751	0.795	0.676	No
	Left	0.155	0.000	0.000	0.000	0.155	0.155	0.155	No
	Right	0.081	0.132	0.063	0.032	0.213	0.144	0.113	No
	Top	0.000	0.018	0.030	0.007	0.018	0.030	0.007	No
	Bottom	0.528	0.000	0.000	0.000	0.528	0.528	0.528	No
LTE Band 7	Front	0.282	0.041	0.028	0.008	0.323	0.310	0.290	No
	Back	1.253	0.092	0.136	0.017	1.345	1.389	1.270	No
	Left	0.346	0.000	0.000	0.000	0.346	0.346	0.346	No
	Right	0.061	0.132	0.063	0.032	0.193	0.124	0.093	No
	Top	0.000	0.018	0.030	0.007	0.018	0.030	0.007	No
	Bottom	0.834	0.000	0.000	0.000	0.834	0.834	0.834	No
LTE Band 12	Front	0.127	0.041	0.028	0.008	0.168	0.155	0.135	No
	Back	0.284	0.092	0.136	0.017	0.376	0.420	0.301	No
	Left	0.086	0.000	0.000	0.000	0.086	0.086	0.086	No
	Right	0.086	0.132	0.063	0.032	0.218	0.149	0.118	No
	Top	0.000	0.018	0.030	0.007	0.018	0.030	0.007	No
	Bottom	0.045	0.000	0.000	0.000	0.045	0.045	0.045	No
LTE Band 25	Front	0.272	0.041	0.028	0.008	0.313	0.300	0.280	No
	Back	0.650	0.092	0.136	0.017	0.742	0.786	0.667	No
	Left	0.152	0.000	0.000	0.000	0.152	0.152	0.152	No
	Right	0.140	0.132	0.063	0.032	0.272	0.203	0.172	No
	Top	0.000	0.018	0.030	0.007	0.018	0.030	0.007	No
	Bottom	0.536	0.000	0.000	0.000	0.536	0.536	0.536	No
LTE Band 26	Front	0.337	0.041	0.028	0.008	0.378	0.365	0.345	No
	Back	0.470	0.092	0.136	0.017	0.562	0.606	0.487	No
	Left	0.292	0.000	0.000	0.000	0.292	0.292	0.292	No
	Right	0.306	0.132	0.063	0.032	0.438	0.369	0.338	No
	Top	0.000	0.018	0.030	0.007	0.018	0.030	0.007	No
	Bottom	0.049	0.000	0.000	0.000	0.049	0.049	0.049	No
LTE Band 38	Front	0.108	0.041	0.028	0.008	0.149	0.136	0.116	No
	Back	0.341	0.092	0.136	0.017	0.433	0.477	0.358	No
	Left	0.094	0.000	0.000	0.000	0.094	0.094	0.094	No

	Right	0.025	0.132	0.063	0.032	0.157	0.088	0.057	No
	Top	0.000	0.018	0.030	0.007	0.018	0.030	0.007	No
	Bottom	0.271	0.000	0.000	0.000	0.271	0.271	0.271	No
LTE Band 41	Front	0.075	0.041	0.028	0.008	0.116	0.103	0.083	No
	Back	0.221	0.092	0.136	0.017	0.313	0.357	0.238	No
	Left	0.085	0.000	0.000	0.000	0.085	0.085	0.085	No
	Right	0.018	0.132	0.063	0.032	0.150	0.081	0.050	No
	Top	0.000	0.018	0.030	0.007	0.018	0.030	0.007	No
	Bottom	0.140	0.000	0.000	0.000	0.140	0.140	0.140	No
LTE Band 66	Front	0.230	0.041	0.028	0.008	0.271	0.258	0.238	No
	Back	0.630	0.092	0.136	0.017	0.722	0.766	0.647	No
	Left	0.089	0.000	0.000	0.000	0.089	0.089	0.089	No
	Right	0.142	0.132	0.063	0.032	0.274	0.205	0.174	No
	Top	0.000	0.018	0.030	0.007	0.018	0.030	0.007	No
	Bottom	0.564	0.000	0.000	0.000	0.564	0.564	0.564	No

9 Equipment list

Test Platform	SPEAG DASY5 Professional					
Location	SGS-CCS Standards Technical Services Co., Ltd. Kunshan Branch					
Description	SAR Test System (Frequency range 300MHz-6GHz)					
Software Reference	DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)					
Hardware Reference						
Equipment	Manufacturer	Model	Serial Number	Calibration Date	Due date of calibration	
<input checked="" type="checkbox"/> P C	HP	Core(rm)3.16G	CZCO48171H	N/A	N/A	
<input checked="" type="checkbox"/> Signal Generator	Agilent	E5182A	MY50142015	2020/09/25	2021/09/24	
<input checked="" type="checkbox"/> S-Parameter Network Analyzer	Agilent	E5071B	MY42301382	2020/02/24	2021/02/23	
<input checked="" type="checkbox"/> DAK-3.5 probe	SPEAG	DAK-3.5	1102	N/A	N/A	
<input checked="" type="checkbox"/> Power meter	Anritsu	ML2495A	1445010	2020/04/21	2021/04/20	
<input checked="" type="checkbox"/> Power sensor	Anritsu	MA2411B	1339220	2020/04/21	2021/04/20	
<input checked="" type="checkbox"/> Communication System	Anritsu	MT8820C	6201465349	2020/04/21	2021/04/20	
<input checked="" type="checkbox"/> Wireless Communication Test Set	R&S	CMU200	109525	2020/10/19	2021/10/18	
<input checked="" type="checkbox"/> DAE	SPEAG	DAE4	1245	2020/05/27	2021/05/26	
<input checked="" type="checkbox"/> E-field PROBE	SPEAG	EX3DV4	3798	2020/05/29	2021/05/28	
<input checked="" type="checkbox"/> Dipole	SPEAG	D750V3	1188	2019/03/07	2022/03/06	
<input checked="" type="checkbox"/> Dipole	SPEAG	D835V2	4d114	2019/06/11	2022/06/10	
<input checked="" type="checkbox"/> Dipole	SPEAG	D1800V2	2d170	2019/06/11	2022/06/10	
<input checked="" type="checkbox"/> Dipole	SPEAG	D1900V2	5d136	2019/06/11	2022/06/10	
<input checked="" type="checkbox"/> Dipole	SPEAG	D2450V2	817	2019/06/10	2022/06/09	
<input checked="" type="checkbox"/> Dipole	SPEAG	D2600V2	1158	2019/03/08	2022/03/07	
<input checked="" type="checkbox"/> Dipole	SPEAG	D5GHzV2	1095	2019/06/14	2022/06/13	
<input checked="" type="checkbox"/> Electro Thermometer	DTM	DTM3000	3030	2020/10/24	2021/10/23	
<input checked="" type="checkbox"/> Amplifier	Mini-circuits	ZVE-8G	110405	N/A	N/A	
<input checked="" type="checkbox"/> Amplifier	Mini-circuits	ZHL-42	QA1331003	N/A	N/A	
<input checked="" type="checkbox"/> 3db ATTENUATOR	MINI	MCL BW-S3W5	0533	N/A	N/A	
<input checked="" type="checkbox"/> DUMMY PROBE	SPEAG	DP_2	SPDP2001AA	N/A	N/A	
<input checked="" type="checkbox"/> Dual Directional Coupler	Woken	20W couple	DOM2BHW1A1	N/A	N/A	
<input checked="" type="checkbox"/> SAM PHANTOM (ELI4 v4.0)	SPEAG	QDOVA001BB	1102	N/A	N/A	
<input checked="" type="checkbox"/> Twin SAM Phantom	SPEAG	QD000P40CD	1609	N/A	N/A	
<input checked="" type="checkbox"/> ROBOT	SPEAG	TX60	F10/5E6AA1/A101	N/A	N/A	
<input checked="" type="checkbox"/> ROBOT KRC	SPEAG	CS8C	F10/5E6AA1/C101	N/A	N/A	
<input checked="" type="checkbox"/> LIQUID CALIBRATION KIT	ANTENNESSA	41/05 OCP9	00425167	N/A	N/A	

Note: All the equipments are within the valid period when the tests are performed.

All measurement facilities used to collect the measurement data are located at

No.10, Weiye Rd., Innovation Park, Eco & Tec. Development Part, Kunshan City, Jiangsu Province, China.

10 Calibration certificate

Please see the Appendix C

11 Photographs

Please see the Appendix D



Appendix A: Detailed System Check Results

The plots are showing as followings.

Date: 2020/12/11

Test Laboratory: Compliance Certification Services Inc.

System Performance Check-Head 750MHz**DUT: Dipole 750 MHz; Type: D750V3; Serial: 1188**Communication System: UID 0, CW (0); Frequency: 750 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 750$ MHz; $\sigma = 0.895$ S/m; $\epsilon_r = 41.649$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3798; ConvF(9.58, 9.58, 9.58); Calibrated: 2020/05/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 2020/05/27
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Body/d=15mm, Pin=250 mW, dist=3.0mm (EX-Probe)/Area Scan (7x12x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 2.68 W/kg

**Body/d=15mm, Pin=250 mW, dist=3.0mm (EX-Probe)/Zoom Scan (7x7x7)
(7x7x7)/Cube 0:**


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 59.16 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 3.33 W/kg

SAR(1 g) = 2.08 W/kg; SAR(10 g) = 1.33 W/kg

Maximum value of SAR (measured) = 2.86 W/kg

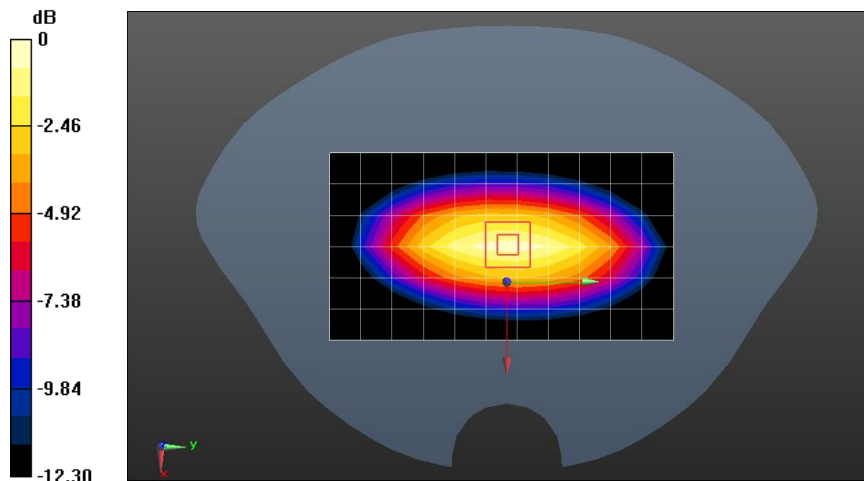

0 dB = 2.86 W/kg = 4.56 dBW/kg

Test Laboratory: Compliance Certification Services Inc.

System Performance Check Head 835MHz

DUT: Dipole 835 MHz; Type: D835V2; Serial: 4d114

Communication System: UID 0, CW; Frequency: 835 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 835 \text{ MHz}$; $\sigma = 0.909 \text{ S/m}$; $\epsilon_r = 41.668$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section
 Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:


- Probe: EX3DV4 - SN3798; ConvF(9.41, 9.41, 9.41); Calibrated: 2020/05/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 2020/05/27
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- Measurement SW: DASYS2, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Body/d=15mm, Pin=250 mW, dist=3.0mm (EX-Probe)/Area Scan (7x12x1):

Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
 Maximum value of SAR (measured) = 2.34 W/kg

Body/d=15mm, Pin=250 mW, dist=3.0mm (EX-Probe)/Zoom Scan (7x7x7)

(7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$
 Reference Value = 52.22 V/m; Power Drift = -0.07 dB
 Peak SAR (extrapolated) = 2.78 W/kg
SAR(1 g) = 2.32 W/kg; SAR(10 g) = 1.55 W/kg
 Maximum value of SAR (measured) = 2.92 W/kg

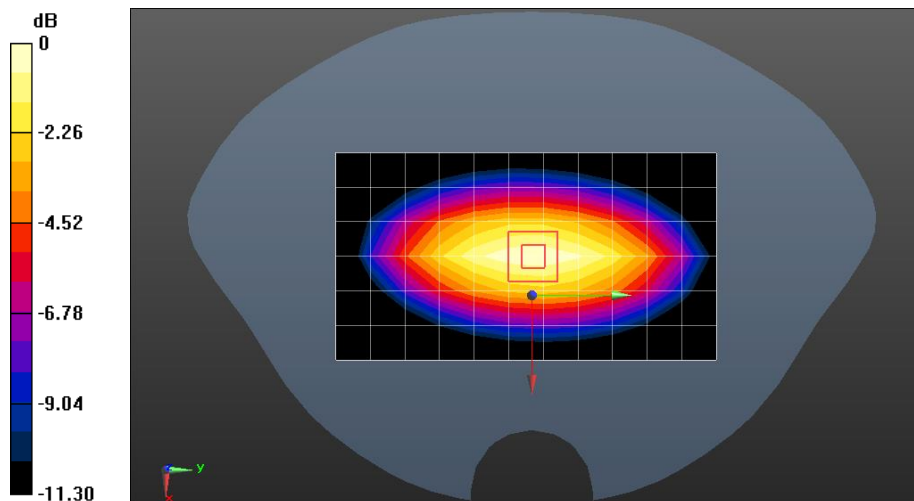

0 dB = 2.92 W/kg = 4.65 dBW/kg

Test Laboratory: Compliance Certification Services Inc.

System Performance Check-Head 1800MHz

DUT: Dipole 1800 MHz; Type: D1800V2; Serial: 2d170

Communication System: UID 10000, CW; Frequency: 1800 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 1800 \text{ MHz}$; $\sigma = 1.384 \text{ S/m}$; $\epsilon_r = 40.258$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section
 Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3798; ConvF(8.13, 8.13, 8.13); Calibrated: 2020/05/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 2020/05/27
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- Measurement SW: DASYS2, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Body/d=10mm, Pin=250 mW, dist=3.0mm (EX-Probe) (23.6 dBm)/Area Scan

(7x7x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 13.4 W/kg

Body/d=10mm, Pin=250 mW, dist=3.0mm (EX-Probe) (23.6 dBm)/Zoom Scan


(7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 99.69 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 17.9 W/kg

SAR(1 g) = 9.55 W/kg; SAR(10 g) = 5.01 W/kg

Maximum value of SAR (measured) = 13.8 W/kg

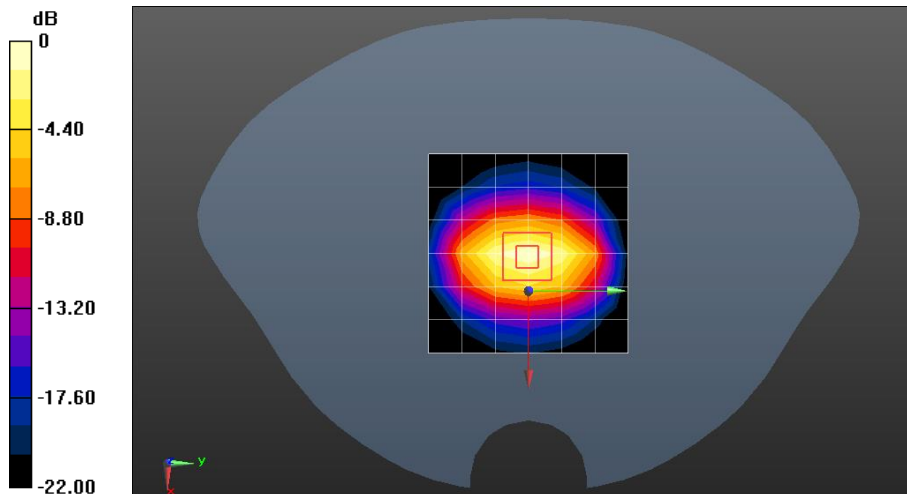

0 dB = 13.8 W/kg = 11.40 dBW/kg

Test Laboratory: Compliance Certification Services Inc.

System Performance Check-Head 1900MHz WCDMA

DUT: Dipole 1900 MHz ; Type: D1900V2; Serial: 5d136


Communication System: UID 0, CW; Frequency: 1900 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 1900 \text{ MHz}$; $\sigma = 1.39 \text{ S/m}$; $\epsilon_r = 40.271$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section
 Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.9, 7.9, 7.9); Calibrated: 2020/05/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 2020/05/27
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- Measurement SW: DASYS2, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Body/Pin=250 mW, dist=10mm (EX-Probe)/Area Scan (7x8x1): Measurement grid:
 $dx=15\text{mm}$, $dy=15\text{mm}$
 Maximum value of SAR (measured) = 14.1 W/kg

Body/Pin=250 mW, dist=10mm (EX-Probe)/Zoom Scan (7x7x7) (7x7x7)/Cube 0:
 Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$
 Reference Value = 103.5 V/m; Power Drift = -0.01 dB
 Peak SAR (extrapolated) = 18.9 W/kg
SAR(1 g) = 10 W/kg; SAR(10 g) = 5.15 W/kg
 Maximum value of SAR (measured) = 14.4 W/kg

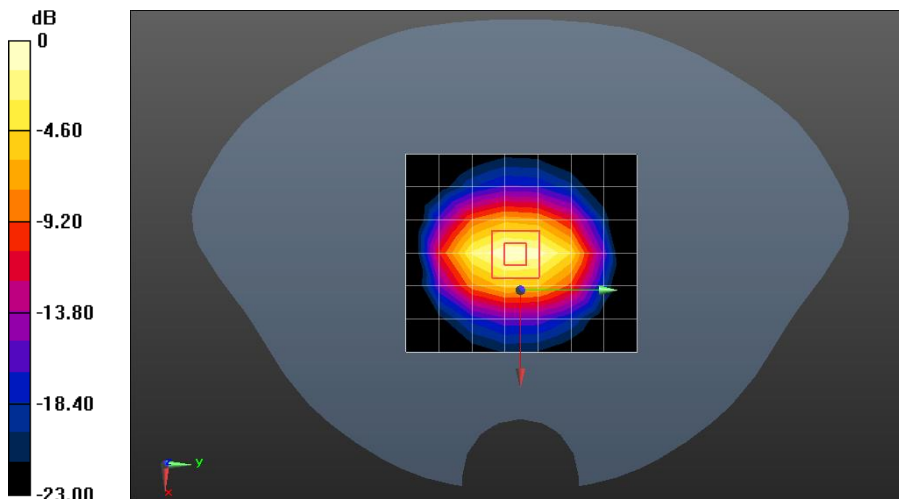

0 dB = 14.4 W/kg = 11.58 dBW/kg

Test Laboratory: Compliance Certification Services Inc.

System Performance Check-Head 1900MHz

DUT: Dipole 1900 MHz ; Type: D1900V2; Serial: 5d136


Communication System: UID 0, CW; Frequency: 1900 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 1900 \text{ MHz}$; $\sigma = 1.414 \text{ S/m}$; $\epsilon_r = 40.564$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section
 Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.9, 7.9, 7.9); Calibrated: 2020/05/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 2020/05/27
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- Measurement SW: DASYS2, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Body/Pin=250 mW, dist=10mm (EX-Probe)/Area Scan (7x8x1): Measurement grid:
 $dx=15\text{mm}$, $dy=15\text{mm}$
 Maximum value of SAR (measured) = 13.2 W/kg

Body/Pin=250 mW, dist=10mm (EX-Probe)/Zoom Scan (7x7x7) (7x7x7)/Cube 0:
 Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$
 Reference Value = 99.71 V/m; Power Drift = -0.02 dB
 Peak SAR (extrapolated) = 17.8 W/kg
SAR(1 g) = 9.53 W/kg; SAR(10 g) = 4.92 W/kg
 Maximum value of SAR (measured) = 13.5 W/kg

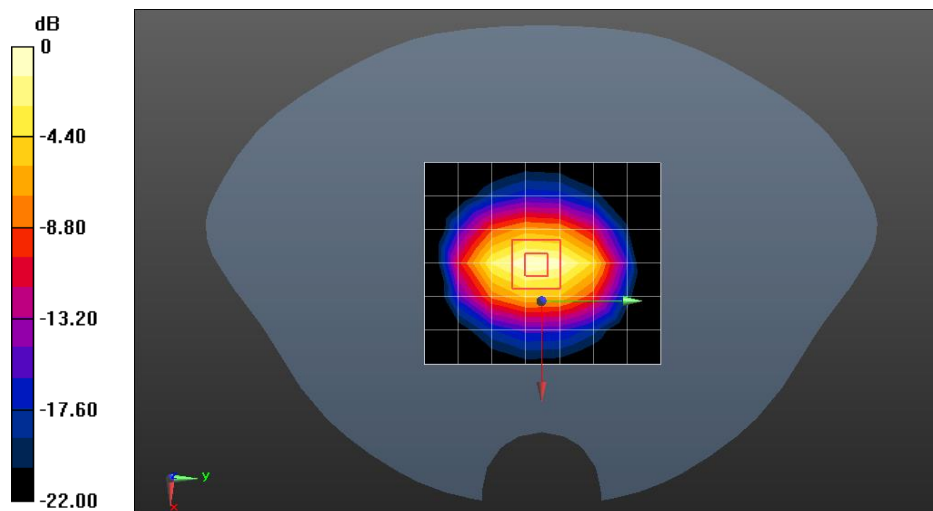

0 dB = 13.5 W/kg = 11.30 dBW/kg

Test Laboratory: Compliance Certification Services Inc.

System Performance Check-Head 2450MHz

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: 817


Communication System: UID 0, CW; Frequency: 2450 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 2450 \text{ MHz}$; $\sigma = 1.824 \text{ S/m}$; $\epsilon_r = 39.15$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section
 Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.27, 7.27, 7.27); Calibrated: 2020/05/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 2020/05/27
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- Measurement SW: DASYS2, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Body/Pin=250 mW, dist=10mm (EX-Probe)/Area Scan (9x10x1): Measurement grid:
 $dx=12\text{mm}$, $dy=12\text{mm}$
 Maximum value of SAR (measured) = 18.8 W/kg

Body/Pin=250 mW, dist=10mm (EX-Probe)/Zoom Scan (7x7x7) (7x7x7)/Cube 0:
 Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$
 Reference Value = 108.0 V/m; Power Drift = 0.00 dB
 Peak SAR (extrapolated) = 29.5 W/kg
SAR(1 g) = 12.8 W/kg; SAR(10 g) = 5.89 W/kg
 Maximum value of SAR (measured) = 20.3 W/kg

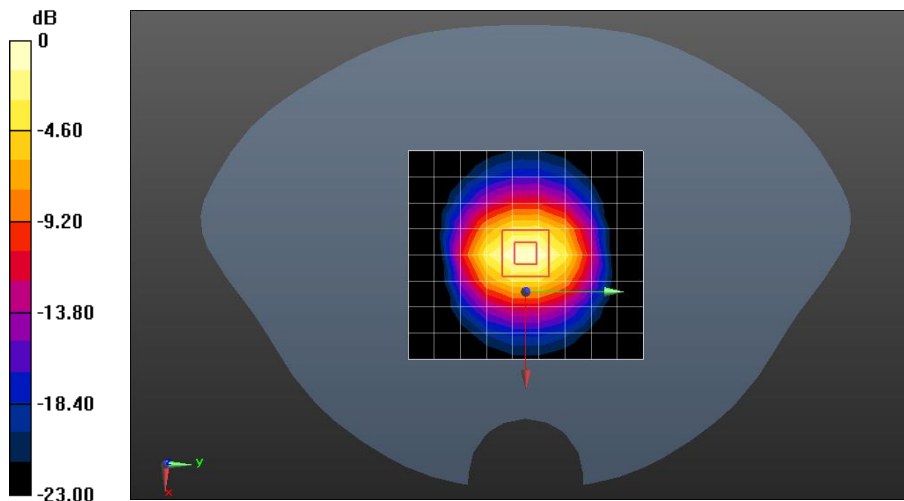

0 dB = 20.3 W/kg = 13.07 dBW/kg

Test Laboratory: Compliance Certification Services Inc.

System Performance Check-Head 2600MHz

DUT: Dipole 2600 MHz; Type: D2600V2; Serial: 1158


Communication System: UID 0, CW (0); Frequency: 2600 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 2600 \text{ MHz}$; $\sigma = 1.977 \text{ S/m}$; $\epsilon_r = 38.589$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section
 Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.06, 7.06, 7.06); Calibrated: 2020/05/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 2020/05/27
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- Measurement SW: DASYS2, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Body/Pin=250 mW, dist=10mm (EX-Probe)/Area Scan (9x10x1): Measurement grid:
 $dx=12\text{mm}$, $dy=12\text{mm}$
 Maximum value of SAR (measured) = 19.2 W/kg

Body/Pin=250 mW, dist=10mm (EX-Probe)/Zoom Scan (7x7x7) (7x7x7)/Cube 0:
 Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$
 Reference Value = 105.4 V/m; Power Drift = 0.11 dB
 Peak SAR (extrapolated) = 29.6 W/kg
SAR(1 g) = 13.5 W/kg; SAR(10 g) = 6.01 W/kg
 Maximum value of SAR (measured) = 21.4 W/kg

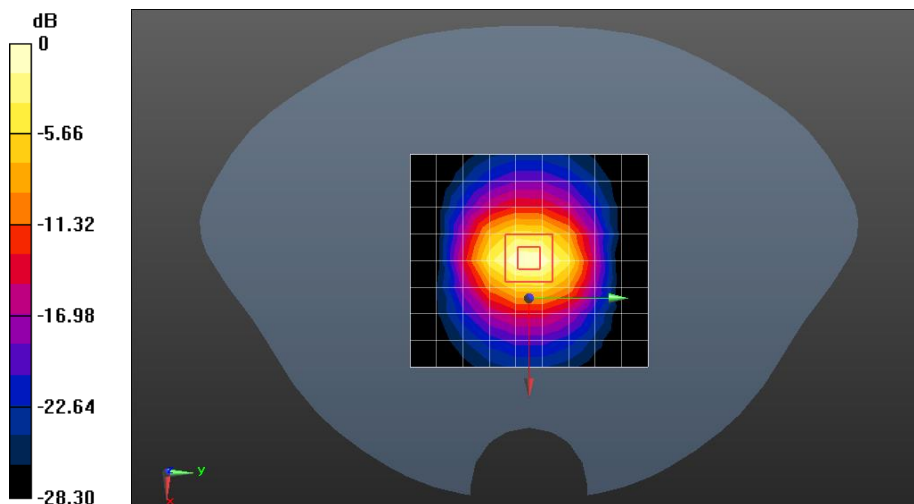

0 dB = 21.4 W/kg = 13.30 dBW/kg

Test Laboratory: Compliance Certification Services Inc.

System Performance Check-Head 2600MHz

DUT: Dipole 2600 MHz; Type: D2600V2; Serial: 1158


Communication System: UID 0, CW (0); Frequency: 2600 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 2600 \text{ MHz}$; $\sigma = 1.963 \text{ S/m}$; $\epsilon_r = 39.224$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section
 Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.06, 7.06, 7.06); Calibrated: 2020/05/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 2020/05/27
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- Measurement SW: DASYS2, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Body/Pin=250 mW, dist=10mm (EX-Probe)/Area Scan (9x10x1): Measurement grid:
 $dx=12\text{mm}$, $dy=12\text{mm}$
 Maximum value of SAR (measured) = 19.1 W/kg

Body/Pin=250 mW, dist=10mm (EX-Probe)/Zoom Scan (7x7x7) (7x7x7)/Cube 0:
 Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$
 Reference Value = 105.4 V/m; Power Drift = 0.11 dB
 Peak SAR (extrapolated) = 29.3 W/kg
SAR(1 g) = 13.4 W/kg; SAR(10 g) = 5.91 W/kg
 Maximum value of SAR (measured) = 21.2 W/kg

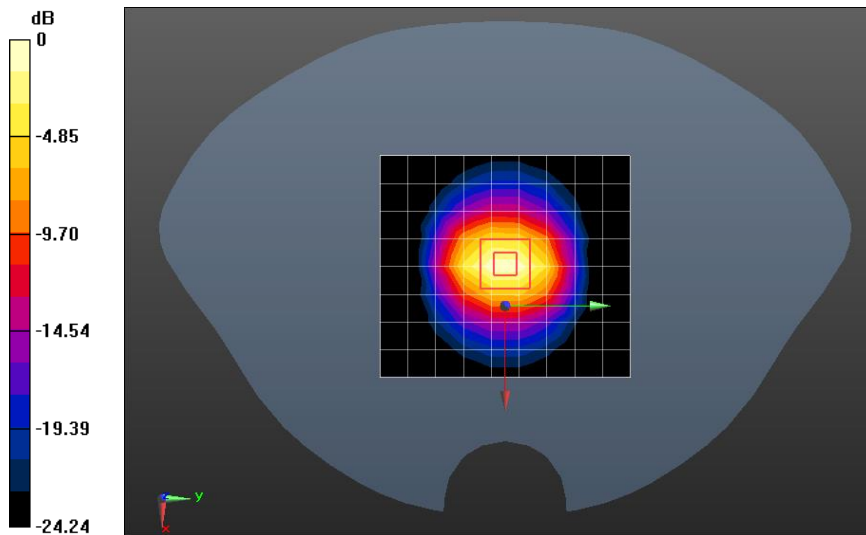

0 dB = 21.2 W/kg = 13.26 dBW/kg

Test Laboratory: Compliance Certification Services Inc.

System Performance Check-Head 5250MHz

DUT: Dipole D5GHzV2; Type: D5GHzV2; Serial: 1095


Communication System: UID 0, CW (0); Frequency: 5250 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 5250 \text{ MHz}$; $\sigma = 4.687 \text{ S/m}$; $\epsilon_r = 36.109$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section
 Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3798; ConvF(4.7, 4.7, 4.7); Calibrated: 2020/05/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 2020/05/27
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- Measurement SW: DASYS52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Body/d=10mm, Pin=100mW, f=5250 MHz/Area Scan (9x10x1): Measurement grid:
 $dx=10\text{mm}$, $dy=10\text{mm}$
 Maximum value of SAR (measured) = 15.9 W/kg

**Body/d=10mm, Pin=100mW, f=5250 MHz/Zoom Scan (4x4x1.4mm, graded),
 dist=1.4mm (8x8x7)/Cube 0:** Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=1.4\text{mm}$
 Reference Value = 72.25 V/m; Power Drift = 0.02 dB
 Peak SAR (extrapolated) = 32.5 W/kg
SAR(1 g) = 8.06 W/kg; SAR(10 g) = 2.33 W/kg
 Maximum value of SAR (measured) = 19.1 W/kg

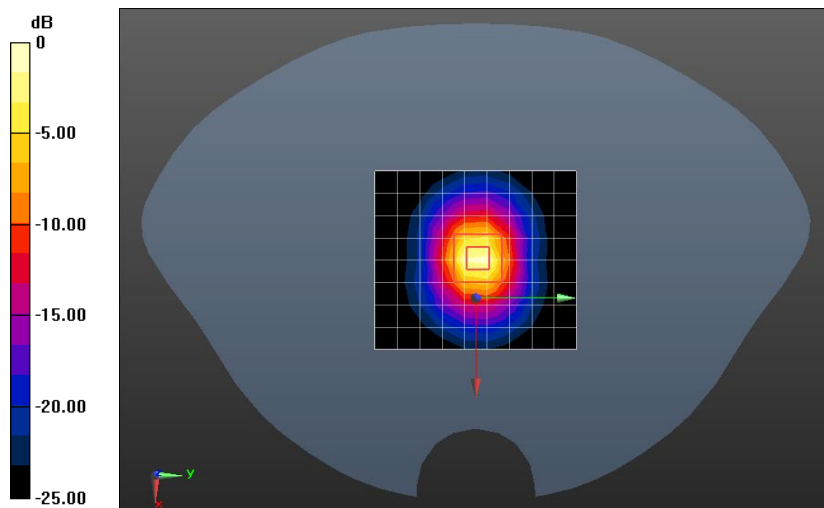

0 dB = 19.1 W/kg = 12.81 dBW/kg

Test Laboratory: Compliance Certification Services Inc.

System Performance Check-Head 5600MHz

DUT: Dipole D5GHzV2; Type: D5GHzV2; Serial: 1095


Communication System: UID 0, CW (0); Frequency: 5600 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 5600$ MHz; $\sigma = 5.07$ S/m; $\epsilon_r = 35.218$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section
 Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3798; ConvF(4.47, 4.47, 4.47); Calibrated: 2020/05/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 2020/05/27
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- Measurement SW: DASYS2, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Body/d=10mm, Pin=100mW, f=5600 MHz/Area Scan (9x10x1): Measurement grid:
 dx=10mm, dy=10mm
 Maximum value of SAR (measured) = 17.9 W/kg

**Body/d=10mm, Pin=100mW, f=5600 MHz/Zoom Scan (4x4x1.4mm, graded),
 dist=1.4mm (8x8x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm
 Reference Value = 72.57 V/m; Power Drift = 0.11 dB
 Peak SAR (extrapolated) = 35.8 W/kg
SAR(1 g) = 8.32 W/kg; SAR(10 g) = 2.45 W/kg
 Maximum value of SAR (measured) = 20.2 W/kg

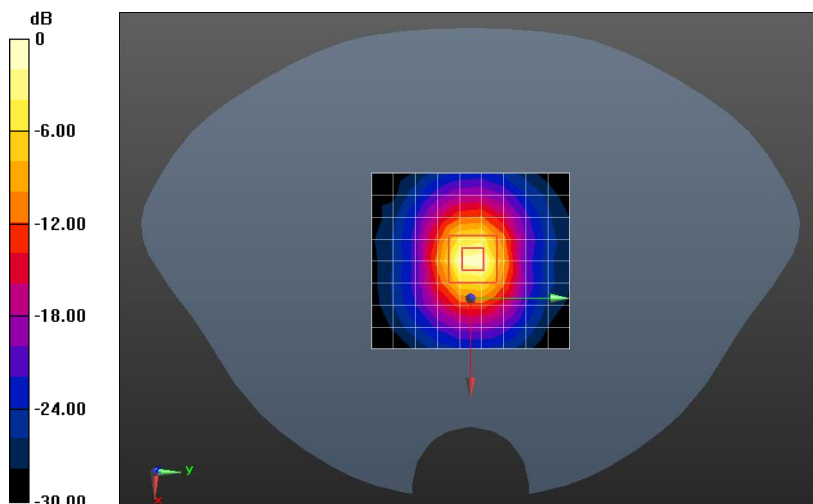

0 dB = 20.2 W/kg = 13.05 dBW/kg

Test Laboratory: Compliance Certification Services Inc.

System Performance Check-Head 5750MHz

DUT: Dipole D5GHzV2; Type: D5GHzV2; Serial: 1095


Communication System: UID 0, CW (0); Frequency: 5750 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 5750 \text{ MHz}$; $\sigma = 5.233 \text{ S/m}$; $\epsilon_r = 34.89$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section
 Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3798; ConvF(4.58, 4.58, 4.58); Calibrated: 2020/05/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 2020/05/27
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- Measurement SW: DASYS52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Body/d=10mm, Pin=100mW, f=5750 MHz/Area Scan (9x10x1): Measurement grid:
 $dx=10\text{mm}$, $dy=10\text{mm}$
 Maximum value of SAR (measured) = 15.9 W/kg

**Body/d=10mm, Pin=100mW, f=5750 MHz/Zoom Scan (4x4x1.4mm, graded),
 dist=1.4mm (8x8x7)/Cube 0:** Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=1.4\text{mm}$
 Reference Value = 70.35 V/m; Power Drift = 0.14 dB
 Peak SAR (extrapolated) = 34.6 W/kg
SAR(1 g) = 8.05 W/kg; SAR(10 g) = 2.31 W/kg
 Maximum value of SAR (measured) = 19.3 W/kg

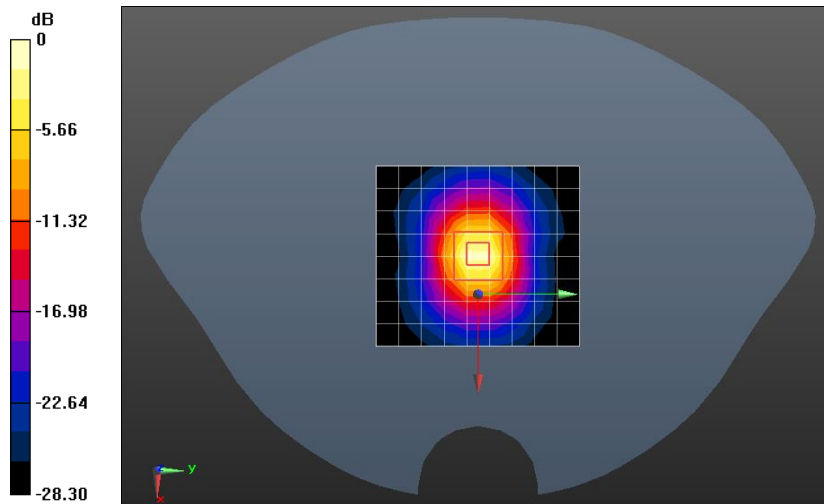

0 dB = 19.3 W/kg = 12.86 dBW/kg



**Compliance Certification Services
(Kunshan) Inc.**

Report No.: KSEM201200154501

Page: 114 of 165

Appendix B: Detailed Test Results

The plots of worse case are showing as followings.

Date: 2020/12/10

Test Laboratory: Compliance Certification Services Inc.

GSM850 GSM Right cheek Ch190

DUT: Smart PoS; Type: D20; Serial: 12000300120073100115

Communication System: UID 0, Generic GSM (0); Frequency: 836.6 MHz; Duty Cycle: 1:8.30042

Medium parameters used: $f = 837 \text{ MHz}$; $\sigma = 0.912 \text{ S/m}$; $\epsilon_r = 41.599$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3798; ConvF(9.41, 9.41, 9.41); Calibrated: 2020/05/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 2020/05/27
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Configuration/Body/Area Scan (7x11x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
Maximum value of SAR (measured) = 0.322 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 4.782 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 0.337 W/kg

SAR(1 g) = 0.271 W/kg; SAR(10 g) = 0.208 W/kg

Maximum value of SAR (measured) = 0.317 W/kg

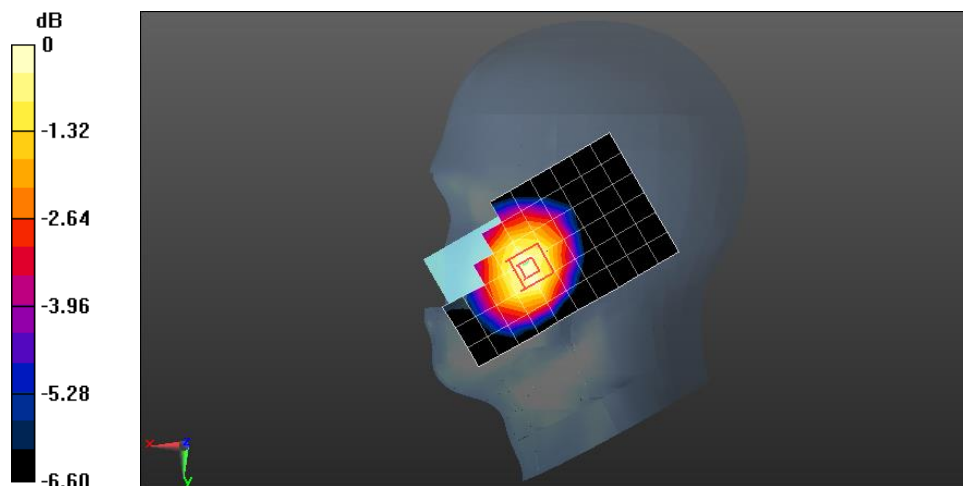

0 dB = 0.317 W/kg = -4.99 dBW/kg

Date: 2020/12/10

Test Laboratory: Compliance Certification Services Inc.

GSM850 GPRS4TS Back side Ch190 10mm

DUT: Smart PoS; Type: D20; Serial: 12000300120073100115

Communication System: UID 0, GPRS/EGPRS 4TX Slots (0); Frequency: 836.6 MHz; Duty Cycle: 1:2.0797

Medium parameters used: $f = 837 \text{ MHz}$; $\sigma = 0.912 \text{ S/m}$; $\epsilon_r = 41.599$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3798; ConvF(9.41, 9.41, 9.41); Calibrated: 2020/05/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 2020/05/27
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Configuration/Body/Area Scan (7x12x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.726 W/kg

Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$


$dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 28.06 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.796 W/kg

SAR(1 g) = 0.576 W/kg; SAR(10 g) = 0.423 W/kg

Maximum value of SAR (measured) = 0.723 W/kg

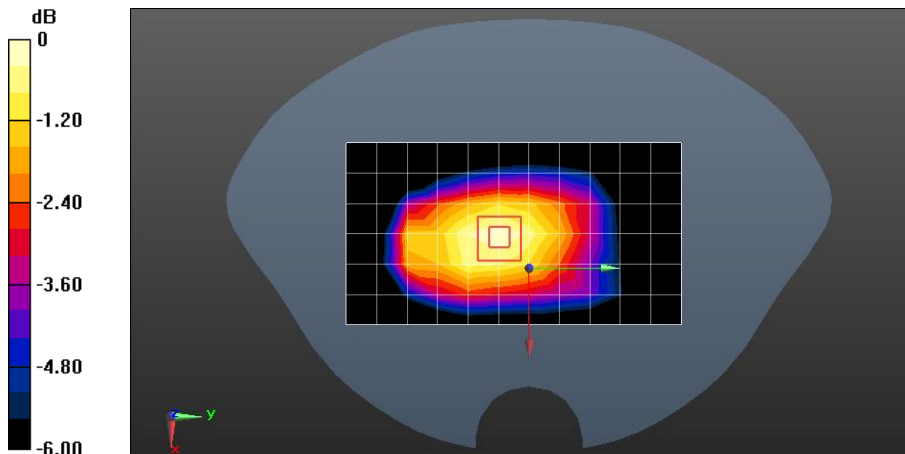

0 dB = 0.723 W/kg = -1.41 dBW/kg

Test Laboratory: Compliance Certification Services Inc.

GSM850 GPRS4TS Back side Ch190 10mm

DUT: Smart PoS; Type: D20; Serial: 12000300120073100115

Communication System: UID 0, GPRS/EGPRS 4TX Slots (0); Frequency: 836.6 MHz; Duty Cycle: 1:2.0797

Medium parameters used: $f = 837 \text{ MHz}$; $\sigma = 0.912 \text{ S/m}$; $\epsilon_r = 41.599$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASYS5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3798; ConvF(9.41, 9.41, 9.41); Calibrated: 2020/05/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 2020/05/27
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- Measurement SW: DASYS52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Configuration/Body/Area Scan (7x12x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.726 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 28.06 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.796 W/kg

SAR(1 g) = 0.576 W/kg; SAR(10 g) = 0.423 W/kg

Maximum value of SAR (measured) = 0.723 W/kg

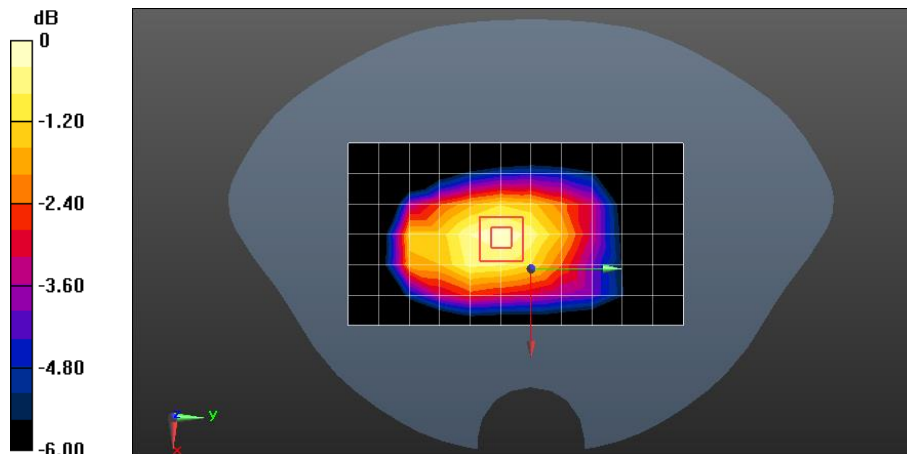

0 dB = 0.723 W/kg = -1.41 dBW/kg

Test Laboratory: Compliance Certification Services Inc.

GSM1900 GSM Right cheek Ch661

DUT: Smart PoS; Type: D20; Serial: 12000300120073100115

Communication System: UID 0, Generic GSM (0); Frequency: 1880 MHz; Duty Cycle: 1:8.30042

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.369$ S/m; $\epsilon_r = 40.265$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Measurement Standard: DASYS5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.9, 7.9, 7.9); Calibrated: 2020/05/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 2020/05/27
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- Measurement SW: DASYS52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Configuration/Body/Area Scan (8x13x1): Measurement grid: dx=12mm, dy=12mm
Maximum value of SAR (measured) = 0.222 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.235 V/m; Power Drift = -0.18 dB

Peak SAR (extrapolated) = 0.265 W/kg

SAR(1 g) = 0.169 W/kg; SAR(10 g) = 0.108 W/kg

Maximum value of SAR (measured) = 0.230 W/kg

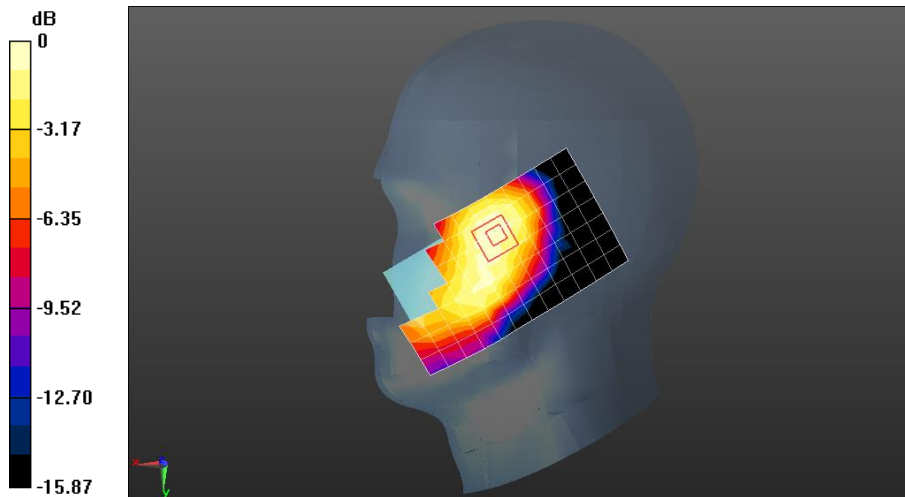

0 dB = 0.230 W/kg = -6.38 dBW/kg

Test Laboratory: Compliance Certification Services Inc.

GSM1900 GPRS4TS Back side Ch661 5mm

DUT: Smart PoS; Type: D20; Serial: 12000300120073100115

Communication System: UID 0, GPRS/EGPRS 4TX Slots (0); Frequency: 1880 MHz; Duty Cycle: 1:2.0797

Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.369 \text{ S/m}$; $\epsilon_r = 40.265$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASYS5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.9, 7.9, 7.9); Calibrated: 2020/05/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 2020/05/27
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- Measurement SW: DASYS52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Configuration/Body/Area Scan (8x14x1): Measurement grid: dx=12mm, dy=12mm
Maximum value of SAR (measured) = 0.760 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 18.56 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 1.03 W/kg

SAR(1 g) = 0.548 W/kg; SAR(10 g) = 0.306 W/kg

Maximum value of SAR (measured) = 0.844 W/kg

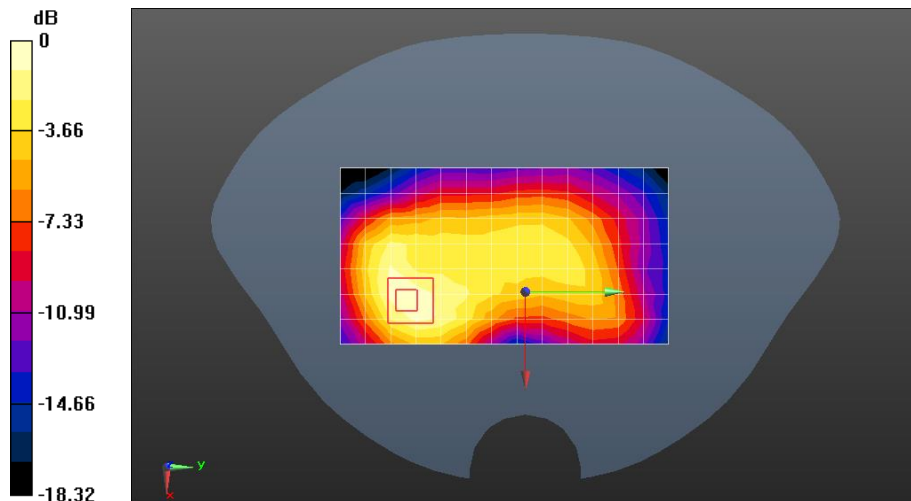

0 dB = 0.844 W/kg = -0.74 dBW/kg

Test Laboratory: Compliance Certification Services Inc.

GSM1900 GPRS4TS Back side Ch661 5mm

DUT: Smart PoS; Type: D20; Serial: 12000300120073100115

Communication System: UID 0, GPRS/EGPRS 4TX Slots (0); Frequency: 1880 MHz; Duty Cycle: 1:2.0797

Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.369 \text{ S/m}$; $\epsilon_r = 40.265$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.9, 7.9, 7.9); Calibrated: 2020/05/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 2020/05/27
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Configuration/Body/Area Scan (8x14x1): Measurement grid: dx=12mm, dy=12mm
Maximum value of SAR (measured) = 0.760 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 18.56 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 1.03 W/kg

SAR(1 g) = 0.548 W/kg; SAR(10 g) = 0.306 W/kg

Maximum value of SAR (measured) = 0.844 W/kg

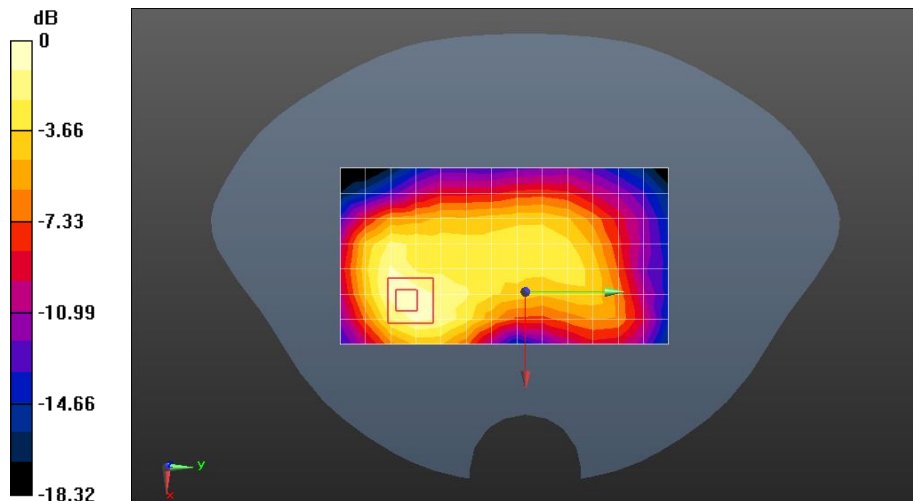

0 dB = 0.844 W/kg = -0.74 dBW/kg

Test Laboratory: Compliance Certification Services Inc.

WCDMA Band II RMC12.2kbps Right cheek Ch9400

DUT: Smart PoS; Type: D20; Serial: 12000300120073100115

Communication System: UID 0, WCDMA / UMTS (0); Frequency: 1880 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.369$ S/m; $\epsilon_r = 40.265$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Measurement Standard: DASYS5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.9, 7.9, 7.9); Calibrated: 2020/05/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 2020/05/27
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- Measurement SW: DASYS52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Configuration/Body/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.219 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.431 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 0.259 W/kg

SAR(1 g) = 0.168 W/kg; SAR(10 g) = 0.107 W/kg

Maximum value of SAR (measured) = 0.226 W/kg

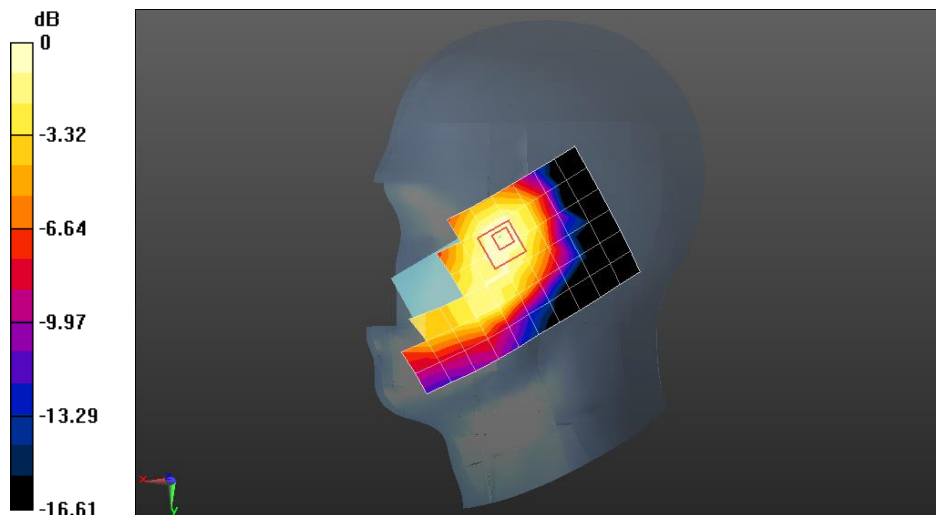

0 dB = 0.226 W/kg = -6.46 dBW/kg

Test Laboratory: Compliance Certification Services Inc.

WCDMA Band II RMC12.2kbps Back side Ch9400 10mm

DUT: Smart PoS; Type: D20; Serial: 12000300120073100115

Communication System: UID 0, WCDMA / UMTS (0); Frequency: 1880 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.369 \text{ S/m}$; $\epsilon_r = 40.265$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASYS5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.9, 7.9, 7.9); Calibrated: 2020/05/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 2020/05/27
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- Measurement SW: DASYS52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Configuration/Body/Area Scan (7x12x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.820 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 18.84 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 1.04 W/kg

SAR(1 g) = 0.567 W/kg; SAR(10 g) = 0.318 W/kg

Maximum value of SAR (measured) = 0.837 W/kg

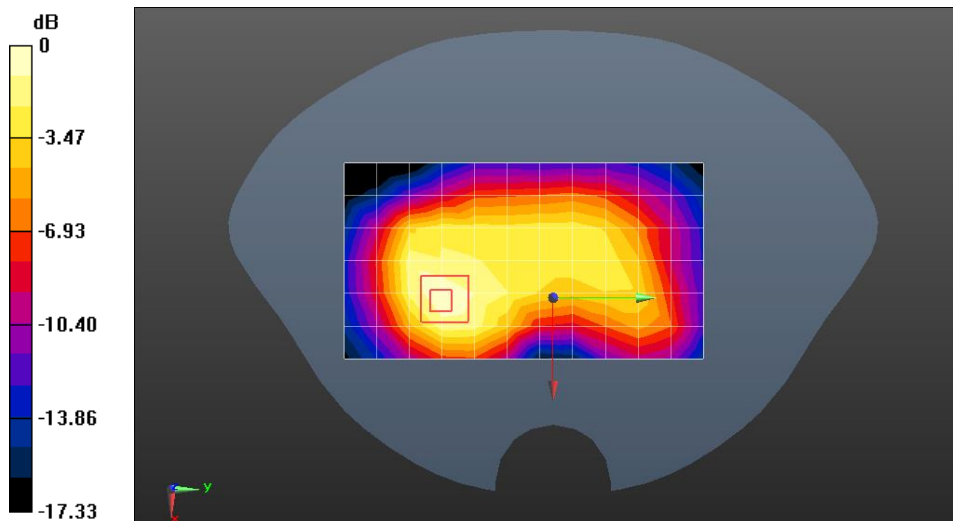

0 dB = 0.837 W/kg = -0.77 dBW/kg

Test Laboratory: Compliance Certification Services Inc.

WCDMA Band II RMC12.2kbps Back side Ch9400 10mm

DUT: Smart PoS; Type: D20; Serial: 12000300120073100115

Communication System: UID 0, WCDMA / UMTS (0); Frequency: 1880 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.369$ S/m; $\epsilon_r = 40.265$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.9, 7.9, 7.9); Calibrated: 2020/05/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 2020/05/27
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- Measurement SW: DASYS2, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Configuration/Body/Area Scan (7x12x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.820 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 18.84 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 1.04 W/kg

SAR(1 g) = 0.567 W/kg; SAR(10 g) = 0.318 W/kg

Maximum value of SAR (measured) = 0.837 W/kg

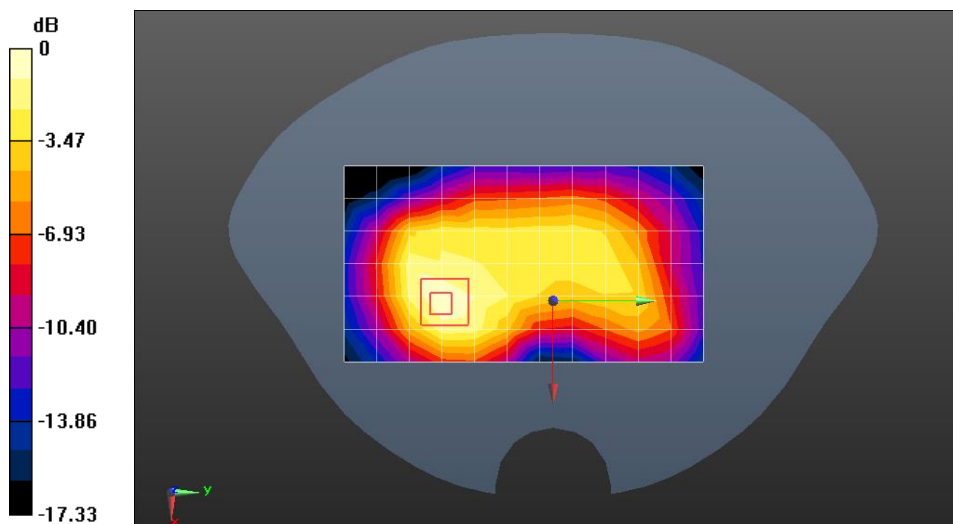

0 dB = 0.837 W/kg = -0.77 dBW/kg

Test Laboratory: Compliance Certification Services Inc.

WCDMA Band V RMC12.2kbps Right cheek Ch4182

DUT: Smart PoS; Type: D20; Serial: 12000300120073100115

Communication System: UID 0, WCDMA / UMTS (0); Frequency: 836.4 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 836.4 \text{ MHz}$; $\sigma = 0.909 \text{ S/m}$; $\epsilon_r = 41.614$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3798; ConvF(9.41, 9.41, 9.41); Calibrated: 2020/05/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 2020/05/27
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- Measurement SW: DASYS2, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Configuration/Body/Area Scan (7x11x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
Maximum value of SAR (measured) = 0.276 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$,
 $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 3.881 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.308 W/kg

SAR(1 g) = 0.246 W/kg; SAR(10 g) = 0.187 W/kg

Maximum value of SAR (measured) = 0.286 W/kg

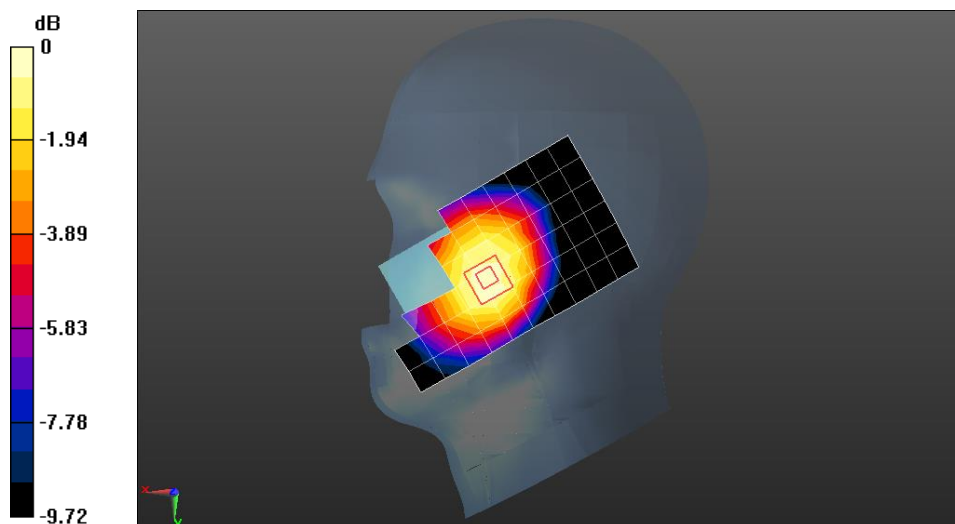

0 dB = 0.286 W/kg = -5.44 dBW/kg

Test Laboratory: Compliance Certification Services Inc.

WCDMA Band V RMC12.2kbps Back side Ch4182 10mm

DUT: Smart PoS; Type: D20; Serial: 12000300120073100115

Communication System: UID 0, WCDMA / UMTS (0); Frequency: 836.4 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 836.4$ MHz; $\sigma = 0.909$ S/m; $\epsilon_r = 41.614$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3798; ConvF(9.41, 9.41, 9.41); Calibrated: 2020/05/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 2020/05/27
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- Measurement SW: DASYS2, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Configuration/Body/Area Scan (7x12x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.455 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 23.32 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.501 W/kg

SAR(1 g) = 0.376 W/kg; SAR(10 g) = 0.277 W/kg

Maximum value of SAR (measured) = 0.459 W/kg

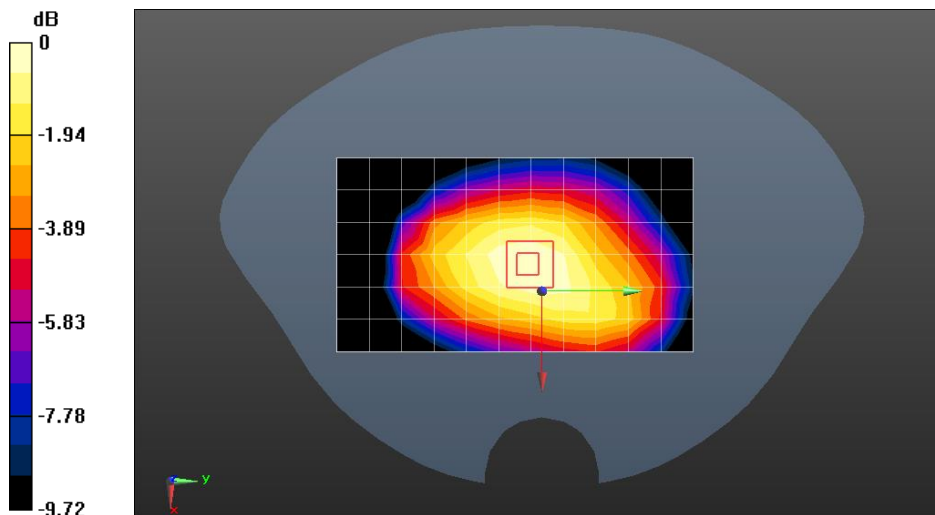

0 dB = 0.459 W/kg = -3.38 dBW/kg

Test Laboratory: Compliance Certification Services Inc.

WCDMA Band V RMC12.2kbps Back side Ch4182 10mm

DUT: Smart PoS; Type: D20; Serial: 12000300120073100115

Communication System: UID 0, WCDMA / UMTS (0); Frequency: 836.4 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 836.4$ MHz; $\sigma = 0.909$ S/m; $\epsilon_r = 41.614$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3798; ConvF(9.41, 9.41, 9.41); Calibrated: 2020/05/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 2020/05/27
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- Measurement SW: DASYS2, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Configuration/Body/Area Scan (7x12x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.455 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 23.32 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.501 W/kg

SAR(1 g) = 0.376 W/kg; SAR(10 g) = 0.277 W/kg

Maximum value of SAR (measured) = 0.459 W/kg

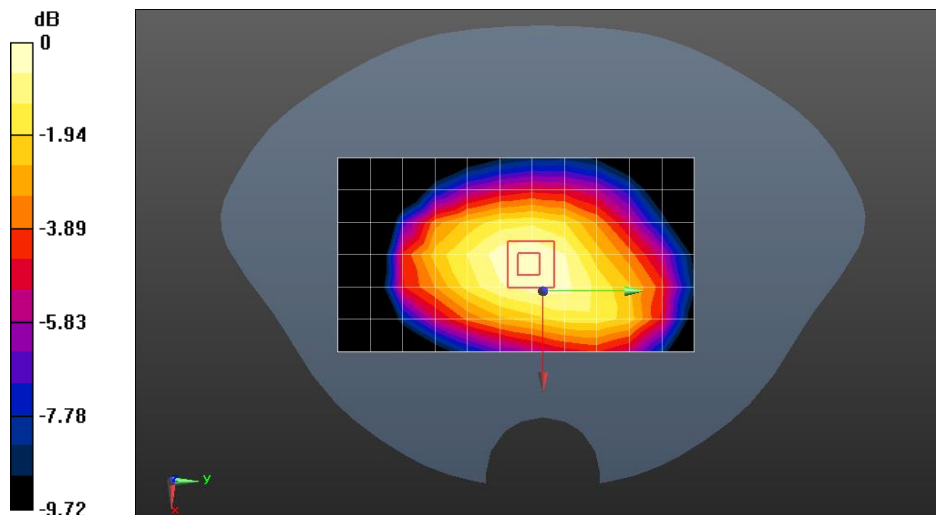

0 dB = 0.459 W/kg = -3.38 dBW/kg

Test Laboratory: Compliance Certification Services Inc.

WCDMA Band IV RMC12.2kbps Left Cheek Ch1412

DUT: Smart PoS; Type: D20; Serial: 12000300120073100115

Communication System: UID 0, WCDMA / UMTS (0); Frequency: 1732.4 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1732.4 \text{ MHz}$; $\sigma = 1.322 \text{ S/m}$; $\epsilon_r = 40.596$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3798; ConvF(8.13, 8.13, 8.13); Calibrated: 2020/05/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 2020/05/27
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- Measurement SW: DASYS2, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Configuration/Body/Area Scan (7x11x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.277 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 5.000 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.400 W/kg

SAR(1 g) = 0.239 W/kg; SAR(10 g) = 0.142 W/kg

Maximum value of SAR (measured) = 0.345 W/kg

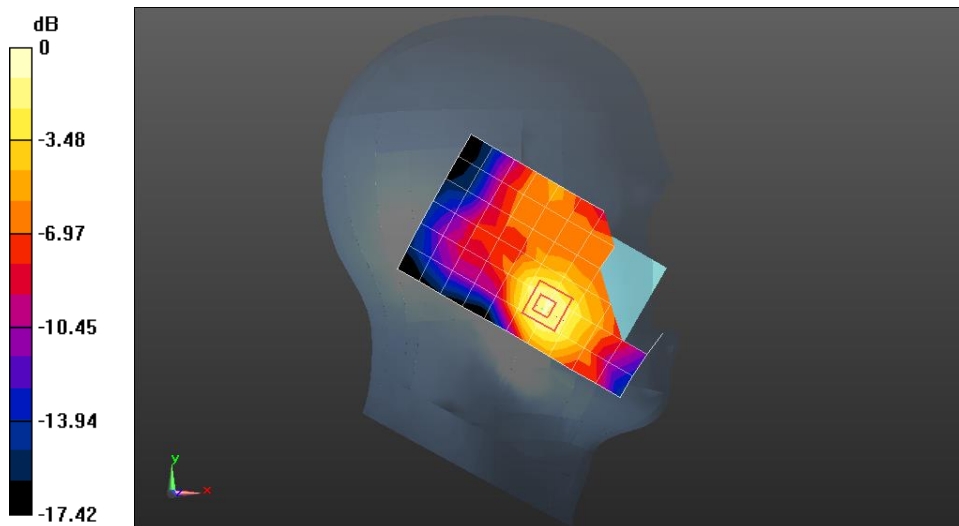

0 dB = 0.345 W/kg = -4.62 dBW/kg

Test Laboratory: Compliance Certification Services Inc.

WCDMA Band IV RMC12.2kbps Back side Ch1412 10mm

DUT: Smart PoS; Type: D20; Serial: 12000300120073100115

Communication System: UID 0, WCDMA / UMTS (0); Frequency: 1732.4 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1732.4$ MHz; $\sigma = 1.322$ S/m; $\epsilon_r = 40.596$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3798; ConvF(8.13, 8.13, 8.13); Calibrated: 2020/05/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 2020/05/27
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- Measurement SW: DASYS2, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Configuration/Body/Area Scan (7x12x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.701 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.61 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 0.850 W/kg

SAR(1 g) = 0.503 W/kg; SAR(10 g) = 0.304 W/kg

Maximum value of SAR (measured) = 0.716 W/kg

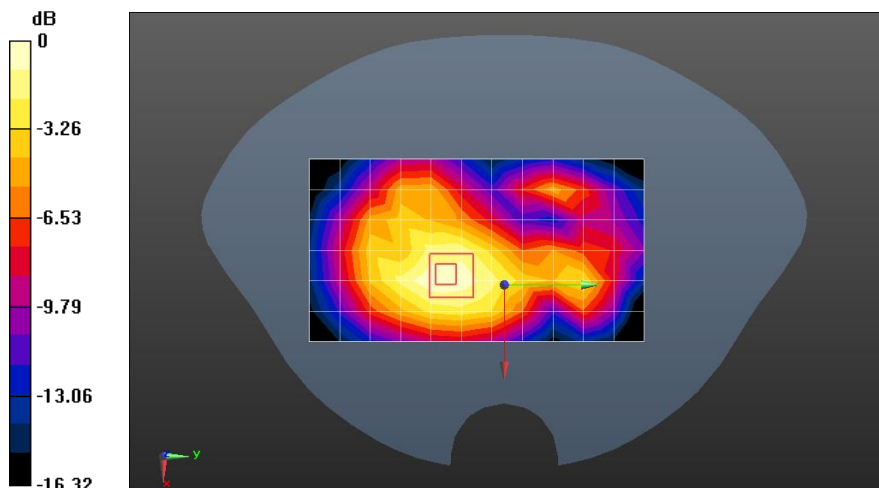

0 dB = 0.716 W/kg = -1.45 dBW/kg

Test Laboratory: Compliance Certification Services Inc.

WCDMA Band IV RMC12.2kbps Back side Ch1412 10mm

DUT: Smart PoS; Type: D20; Serial: 12000300120073100115

Communication System: UID 0, WCDMA / UMTS (0); Frequency: 1732.4 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1732.4$ MHz; $\sigma = 1.322$ S/m; $\epsilon_r = 40.596$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3798; ConvF(8.13, 8.13, 8.13); Calibrated: 2020/05/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 2020/05/27
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- Measurement SW: DASYS2, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Configuration/Body/Area Scan (7x12x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.701 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.61 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 0.850 W/kg

SAR(1 g) = 0.503 W/kg; SAR(10 g) = 0.304 W/kg

Maximum value of SAR (measured) = 0.716 W/kg

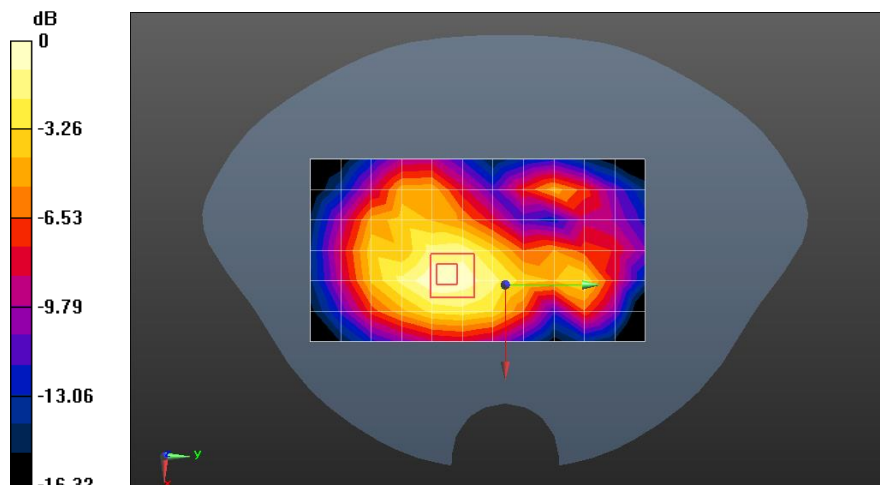

0 dB = 0.716 W/kg = -1.45 dBW/kg

Test Laboratory: Compliance Certification Services Inc.

LTE Band 2 20M QPSK 1RB50 Right cheek Ch18900

DUT: Smart PoS; Type: D20; Serial: 12000300120073100115

Communication System: UID 0, FDD_LTE (0); Frequency: 1880 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.406$ S/m; $\epsilon_r = 40.647$; $\rho = 1000$ kg/m³
 Phantom section: Right Section
 Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.9, 7.9, 7.9); Calibrated: 2020/05/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 2020/05/27
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- Measurement SW: DASYS2, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Configuration/Body/Area Scan (8x13x1): Measurement grid: dx=12mm, dy=12mm
 Maximum value of SAR (measured) = 0.265 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.002 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 0.309 W/kg

SAR(1 g) = 0.202 W/kg; SAR(10 g) = 0.131 W/kg

Maximum value of SAR (measured) = 0.271 W/kg

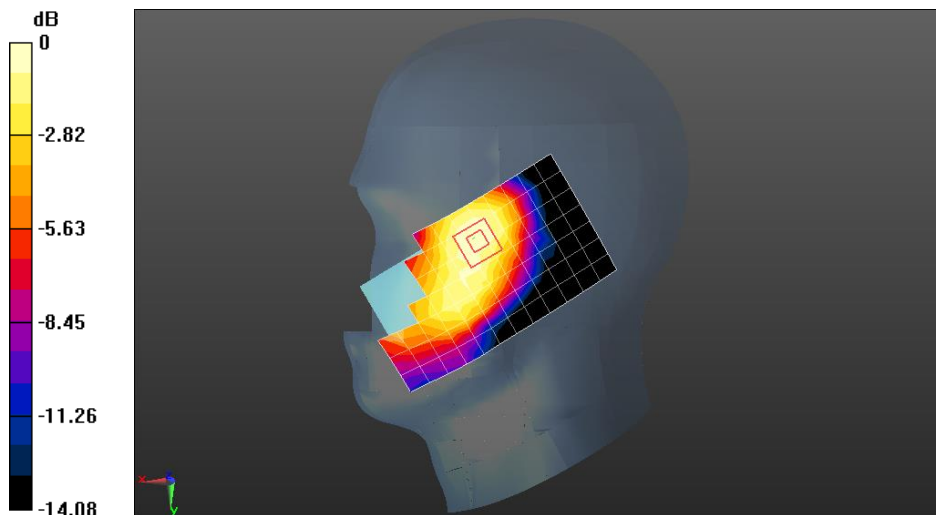

0 dB = 0.271 W/kg = -5.67 dBW/kg

Test Laboratory: Compliance Certification Services Inc.

LTE Band 2 20M QPSK 1RB50 Back side 10mm Ch18900

DUT: Smart PoS; Type: D20; Serial: 12000300120073100115

Communication System: UID 0, FDD_LTE (0); Frequency: 1880 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.406$ S/m; $\epsilon_r = 40.647$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section
 Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.9, 7.9, 7.9); Calibrated: 2020/05/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 2020/05/27
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- Measurement SW: DASYS2, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Configuration/Body/Area Scan (8x14x1): Measurement grid: dx=12mm, dy=12mm
 Maximum value of SAR (measured) = 0.935 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 19.39 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 1.17 W/kg

SAR(1 g) = 0.637 W/kg; SAR(10 g) = 0.356 W/kg

Maximum value of SAR (measured) = 0.966 W/kg

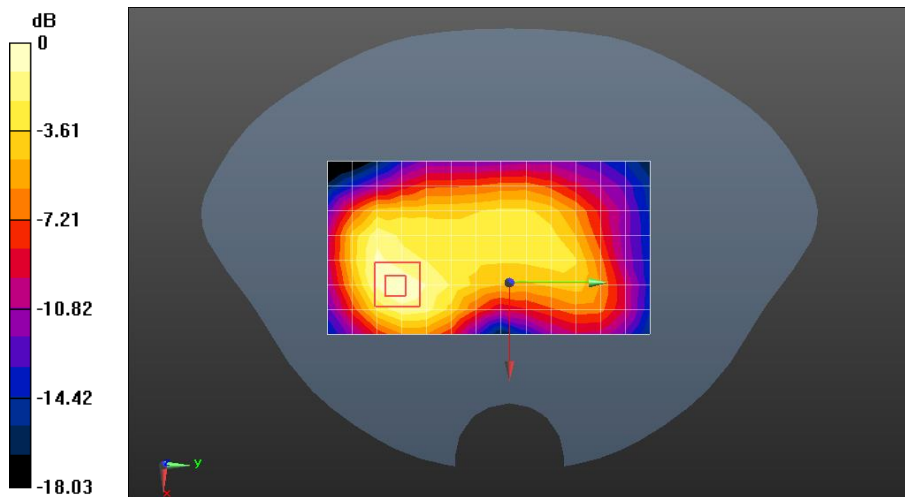

0 dB = 0.966 W/kg = -0.15 dBW/kg

Test Laboratory: Compliance Certification Services Inc.

LTE Band 2 20M QPSK 1RB50 Back side 10mm Ch18900

DUT: Smart PoS; Type: D20; Serial: 12000300120073100115

Communication System: UID 0, FDD_LTE (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.406$ S/m; $\epsilon_r = 40.647$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.9, 7.9, 7.9); Calibrated: 2020/05/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 2020/05/27
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- Measurement SW: DASYS2, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Configuration/Body/Area Scan (8x14x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.935 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 19.39 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 1.17 W/kg

SAR(1 g) = 0.637 W/kg; SAR(10 g) = 0.356 W/kg

Maximum value of SAR (measured) = 0.966 W/kg

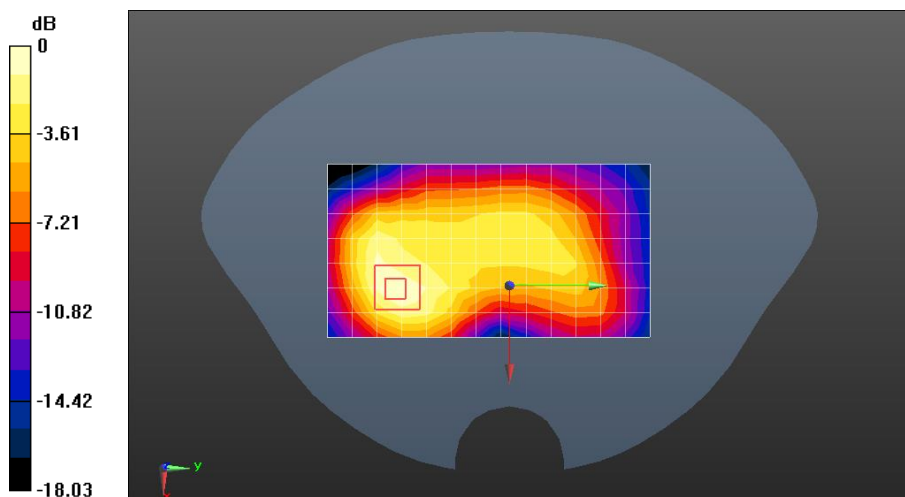

0 dB = 0.966 W/kg = -0.15 dBW/kg

Test Laboratory: Compliance Certification Services Inc.

LTE Band 7 20M QPSK 1RB50 Left cheek Ch20850

DUT: Smart PoS; Type: D20; Serial: 12000300120073100115

Communication System: UID 0, FDD_LTE (0); Frequency: 2510 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 2510$ MHz; $\sigma = 1.865$ S/m; $\epsilon_r = 39.55$; $\rho = 1000$ kg/m³
 Phantom section: Left Section
 Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.06, 7.06, 7.06); Calibrated: 2020/05/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 2020/05/27
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- Measurement SW: DASYS2, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Configuration/Body/Area Scan (9x14x1): Measurement grid: dx=12mm, dy=12mm
 Maximum value of SAR (measured) = 0.809 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.882 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 1.03 W/kg

SAR(1 g) = 0.55 W/kg; SAR(10 g) = 0.285 W/kg

Maximum value of SAR (measured) = 0.845 W/kg

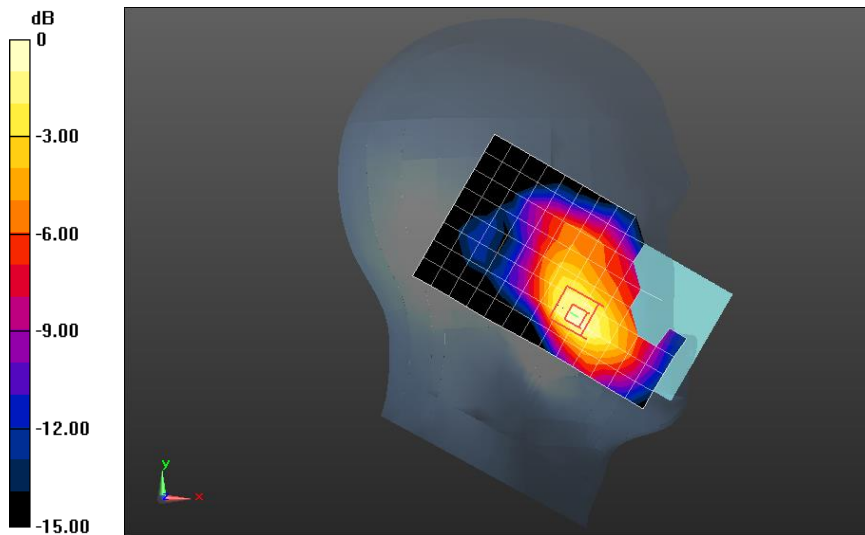

0 dB = 0.845 W/kg = -0.73 dBW/kg

Test Laboratory: Compliance Certification Services Inc.

LTE Band 7 20M QPSK 1RB50 Back side 10mm Ch21100

DUT: Smart PoS; Type: D20; Serial: 12000300120073100115

Communication System: UID 0, FDD_LTE (0); Frequency: 2535.5 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 2535.5$ MHz; $\sigma = 1.891$ S/m; $\epsilon_r = 39.486$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section
 Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.06, 7.06, 7.06); Calibrated: 2020/05/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 2020/05/27
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- Measurement SW: DASYS2, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Configuration/Body/Area Scan (8x13x1): Measurement grid: dx=12mm, dy=12mm
 Maximum value of SAR (measured) = 2.07 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 13.82 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 2.31 W/kg

SAR(1 g) = 1.18 W/kg; SAR(10 g) = 0.565 W/kg

Maximum value of SAR (measured) = 1.87 W/kg

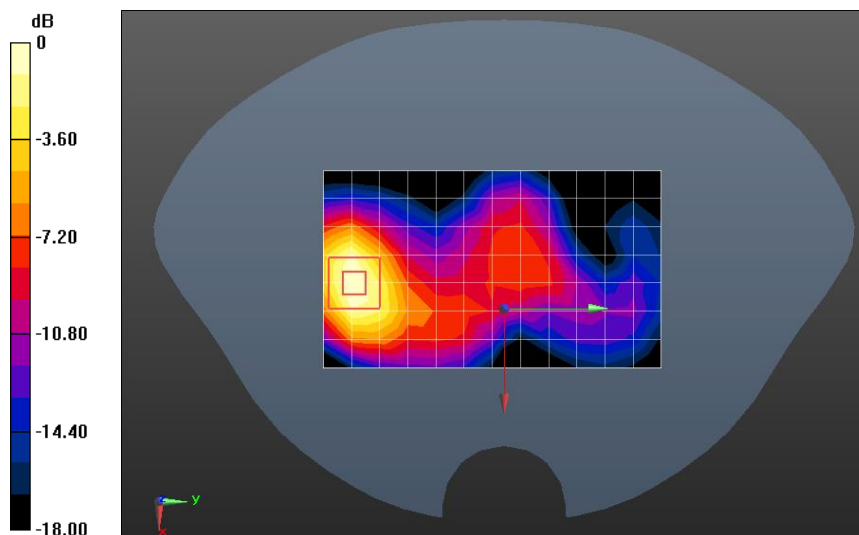

0 dB = 1.87 W/kg = 2.72 dBW/kg

Test Laboratory: Compliance Certification Services Inc.

LTE Band 7 20M QPSK 1RB50 Back side 10mm Ch21100

DUT: Smart PoS; Type: D20; Serial: 12000300120073100115

Communication System: UID 0, FDD_LTE (0); Frequency: 2535.5 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 2535.5$ MHz; $\sigma = 1.891$ S/m; $\epsilon_r = 39.486$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section
 Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.06, 7.06, 7.06); Calibrated: 2020/05/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 2020/05/27
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- Measurement SW: DASYS2, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Configuration/Body/Area Scan (8x13x1): Measurement grid: dx=12mm, dy=12mm
 Maximum value of SAR (measured) = 2.07 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 13.82 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 2.31 W/kg

SAR(1 g) = 1.18 W/kg; SAR(10 g) = 0.565 W/kg

Maximum value of SAR (measured) = 1.87 W/kg

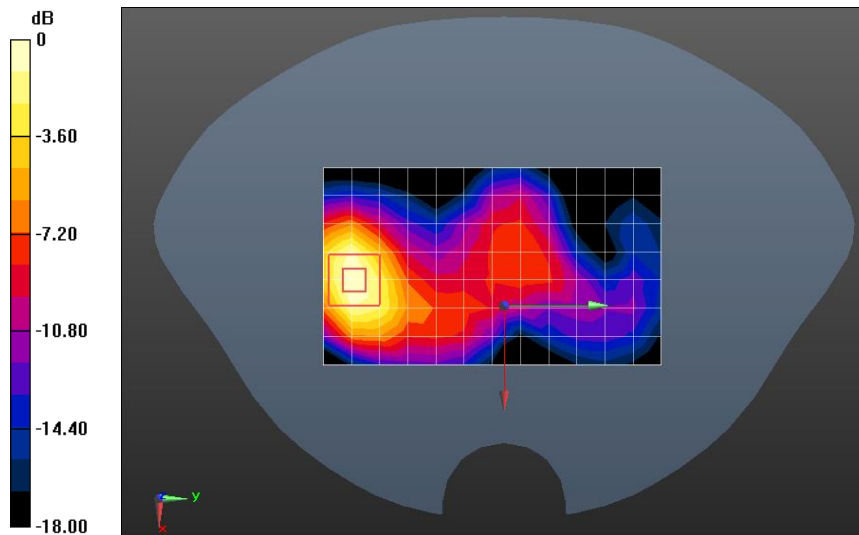

0 dB = 1.87 W/kg = 2.72 dBW/kg

Test Laboratory: Compliance Certification Services Inc.

LTE Band 12 10M QPSK 1RB25 Right cheek Ch23060

DUT: Smart PoS; Type: D20; Serial: 12000300120073100115

Communication System: UID 0, FDD_LTE (0); Frequency: 704 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 704 \text{ MHz}$; $\sigma = 0.863 \text{ S/m}$; $\epsilon_r = 42.594$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3798; ConvF(9.58, 9.58, 9.58); Calibrated: 2020/05/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 2020/05/27
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- Measurement SW: DASYS2, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Configuration/Body/Area Scan (7x11x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.142 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$,

$dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 4.856 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 0.148 W/kg

SAR(1 g) = 0.127 W/kg; SAR(10 g) = 0.102 W/kg

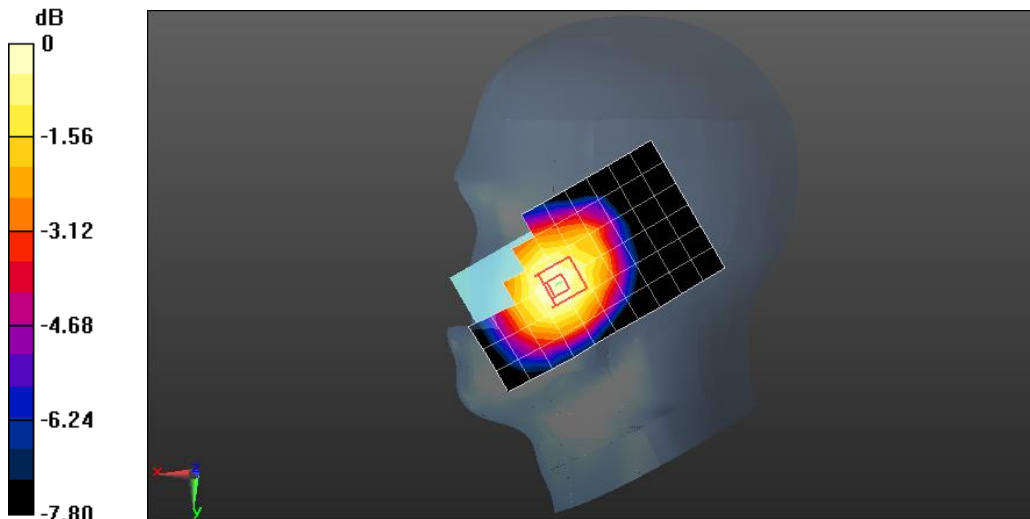

0 dB = 0.142 W/kg = -8.48 dBW/kg

Test Laboratory: Compliance Certification Services Inc.

LTE Band 12 10M QPSK 1RB25 Back side Ch23060 10mm

DUT: Smart PoS; Type: D20; Serial: 12000300120073100115

Communication System: UID 0, FDD_LTE (0); Frequency: 704 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 704 \text{ MHz}$; $\sigma = 0.863 \text{ S/m}$; $\epsilon_r = 42.594$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3798; ConvF(9.58, 9.58, 9.58); Calibrated: 2020/05/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 2020/05/27
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- Measurement SW: DASYS2, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Configuration/Body/Area Scan (7x12x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.286 W/kg

Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$,


$dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 17.40 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.318 W/kg

SAR(1 g) = 0.242 W/kg; SAR(10 g) = 0.182 W/kg

Maximum value of SAR (measured) = 0.291 W/kg

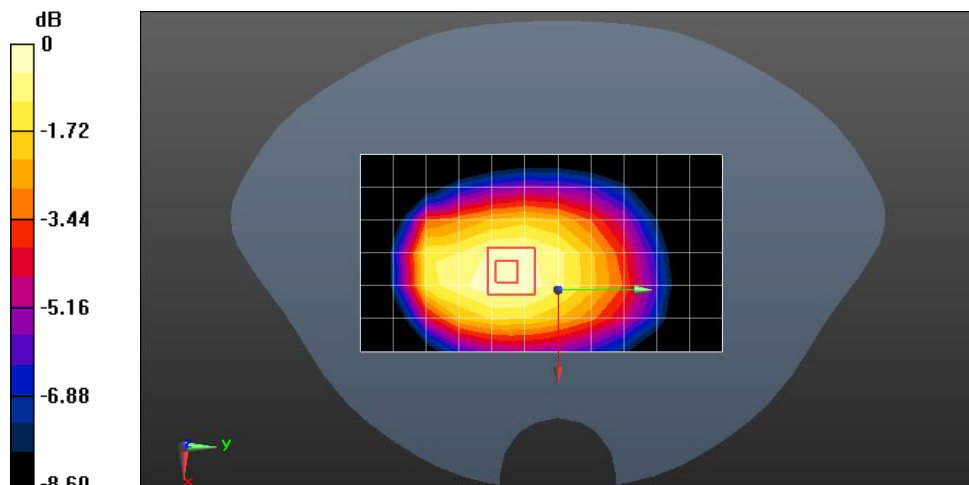

0 dB = 0.291 W/kg = -5.36 dBW/kg

Test Laboratory: Compliance Certification Services Inc.

LTE Band 12 10M QPSK 1RB25 Back side Ch23060 10mm

DUT: Smart PoS; Type: D20; Serial: 12000300120073100115

Communication System: UID 0, FDD_LTE (0); Frequency: 704 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 704 \text{ MHz}$; $\sigma = 0.863 \text{ S/m}$; $\epsilon_r = 42.594$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3798; ConvF(9.58, 9.58, 9.58); Calibrated: 2020/05/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 2020/05/27
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- Measurement SW: DASYS2, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Configuration/Body/Area Scan (7x12x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.286 W/kg

Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$,


$dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 17.40 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.318 W/kg

SAR(1 g) = 0.242 W/kg; SAR(10 g) = 0.182 W/kg

Maximum value of SAR (measured) = 0.291 W/kg

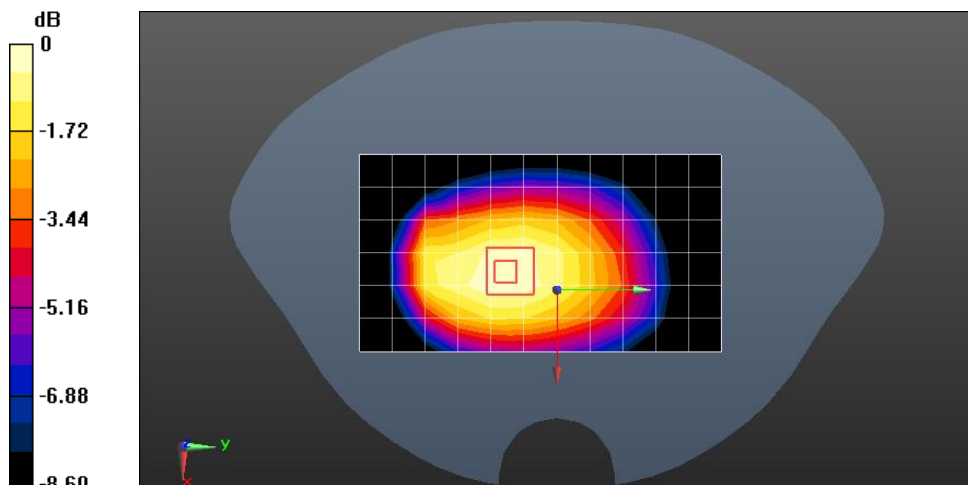

0 dB = 0.291 W/kg = -5.36 dBW/kg

Test Laboratory: Compliance Certification Services Inc.

LTE Band 25 20M QPSK 1RB50 Right cheek Ch26365

DUT: Smart PoS; Type: D20; Serial: 12000300120073100115

Communication System: UID 0, FDD_LTE (0); Frequency: 1882.5 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 1882.5$ MHz; $\sigma = 1.404$ S/m; $\epsilon_r = 40.634$; $\rho = 1000$ kg/m³
 Phantom section: Right Section
 Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.9, 7.9, 7.9); Calibrated: 2020/05/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 2020/05/27
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- Measurement SW: DASYS2, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Configuration/Body/Area Scan (8x13x1): Measurement grid: dx=12mm, dy=12mm
 Maximum value of SAR (measured) = 0.264 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.750 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.304 W/kg

SAR(1 g) = 0.202 W/kg; SAR(10 g) = 0.131 W/kg

Maximum value of SAR (measured) = 0.268 W/kg

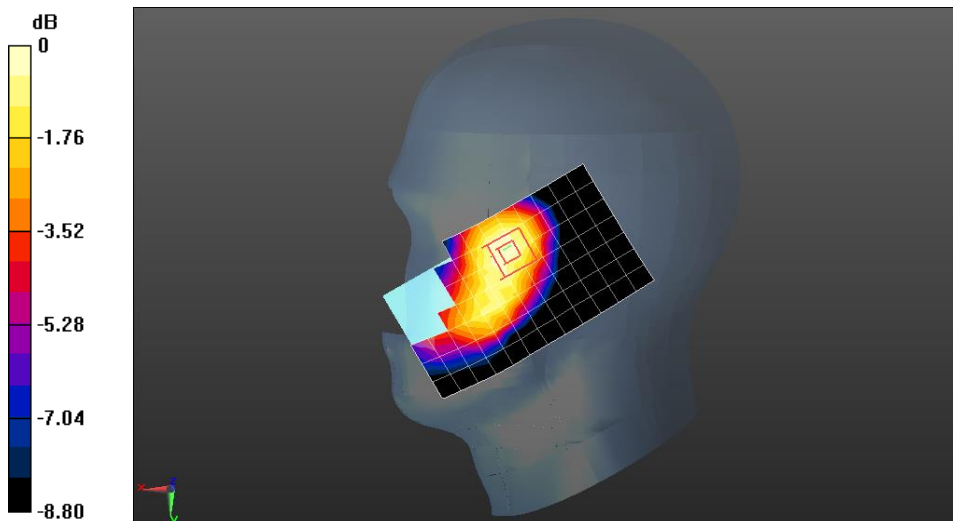

0 dB = 0.268 W/kg = -5.72 dBW/kg

Test Laboratory: Compliance Certification Services Inc.

LTE Band 25 20M QPSK 1RB50 Back side 10mm Ch26365

DUT: Smart PoS; Type: D20; Serial: 12000300120073100115

Communication System: UID 0, FDD_LTE (0); Frequency: 1882.5 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 1882.5$ MHz; $\sigma = 1.404$ S/m; $\epsilon_r = 40.634$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section
 Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.9, 7.9, 7.9); Calibrated: 2020/05/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 2020/05/27
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- Measurement SW: DASYS2, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Configuration/Body/Area Scan (8x14x1): Measurement grid: dx=12mm, dy=12mm
 Maximum value of SAR (measured) = 0.914 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 18.54 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 1.17 W/kg

SAR(1 g) = 0.638 W/kg; SAR(10 g) = 0.357 W/kg

Maximum value of SAR (measured) = 0.953 W/kg

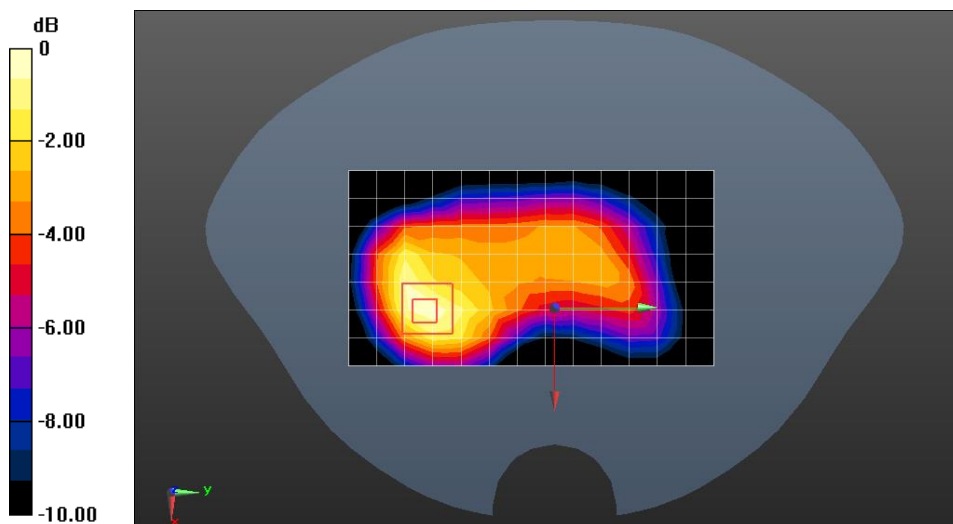

0 dB = 0.953 W/kg = -0.21 dBW/kg

Test Laboratory: Compliance Certification Services Inc.

LTE Band 25 20M QPSK 1RB50 Back side 10mm Ch26365

DUT: Smart PoS; Type: D20; Serial: 12000300120073100115

Communication System: UID 0, FDD_LTE (0); Frequency: 1882.5 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 1882.5 \text{ MHz}$; $\sigma = 1.404 \text{ S/m}$; $\epsilon_r = 40.634$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section
 Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.9, 7.9, 7.9); Calibrated: 2020/05/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 2020/05/27
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- Measurement SW: DASYS2, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Configuration/Body/Area Scan (8x14x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$
 Maximum value of SAR (measured) = 0.914 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$,
 $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 18.54 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 1.17 W/kg

SAR(1 g) = 0.638 W/kg; SAR(10 g) = 0.357 W/kg

Maximum value of SAR (measured) = 0.953 W/kg

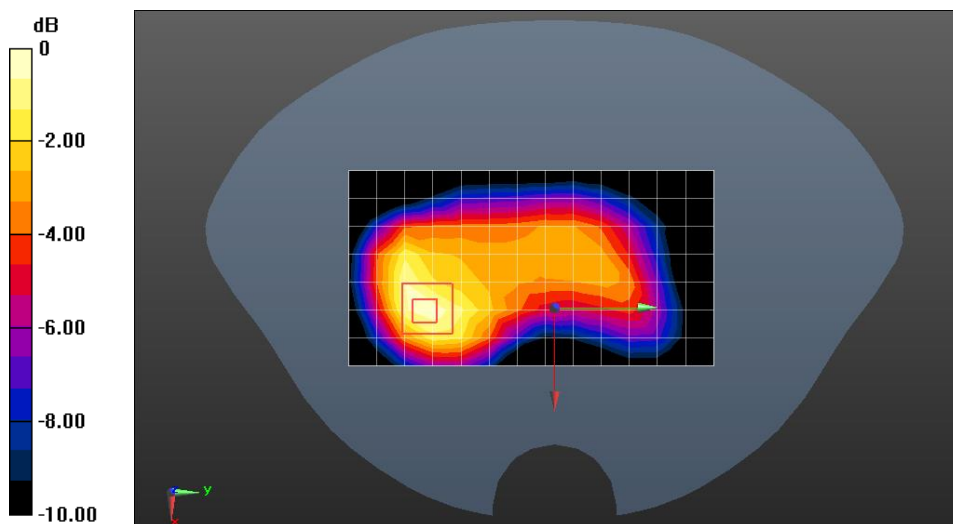

0 dB = 0.953 W/kg = -0.21 dBW/kg

Test Laboratory: Compliance Certification Services Inc.

LTE Band 26 15M QPSK 1R38 Right cheek Ch26765

DUT: Smart PoS; Type: D20; Serial: 12000300120073100115

Communication System: UID 0, FDD_LTE (0); Frequency: 821.5 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 821.5 \text{ MHz}$; $\sigma = 0.895 \text{ S/m}$; $\epsilon_r = 41.917$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Right Section
 Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3798; ConvF(9.41, 9.41, 9.41); Calibrated: 2020/05/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 2020/05/27
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- Measurement SW: DASYS2, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Configuration/Body/Area Scan (7x11x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
 Maximum value of SAR (measured) = 0.257 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$,
 $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 3.565 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 0.274 W/kg

SAR(1 g) = 0.223 W/kg; SAR(10 g) = 0.172 W/kg

Maximum value of SAR (measured) = 0.258 W/kg

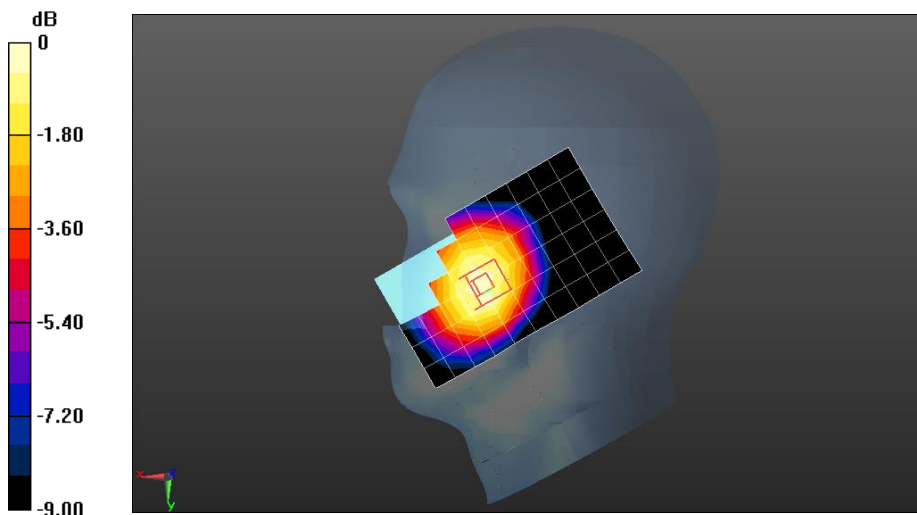

0 dB = 0.258 W/kg = -5.88 dBW/kg

Test Laboratory: Compliance Certification Services Inc.

LTE Band 26 15M QPSK 1RB38 Back side Ch26765 10mm

DUT: Smart PoS; Type: D20; Serial: 12000300120073100115


Communication System: UID 0, FDD_LTE (0); Frequency: 821.5 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 821.5 \text{ MHz}$; $\sigma = 0.895 \text{ S/m}$; $\epsilon_r = 41.917$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section
 Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3798; ConvF(9.41, 9.41, 9.41); Calibrated: 2020/05/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 2020/05/27
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- Measurement SW: DASYS2, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Configuration/Body/Area Scan (7x12x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
 Maximum value of SAR (measured) = 0.449 W/kg

Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$,
 $dy=8\text{mm}$, $dz=5\text{mm}$
 Reference Value = 23.02 V/m; Power Drift = 0.01 dB
 Peak SAR (extrapolated) = 0.495 W/kg
SAR(1 g) = 0.378 W/kg; SAR(10 g) = 0.280 W/kg
 Maximum value of SAR (measured) = 0.456 W/kg

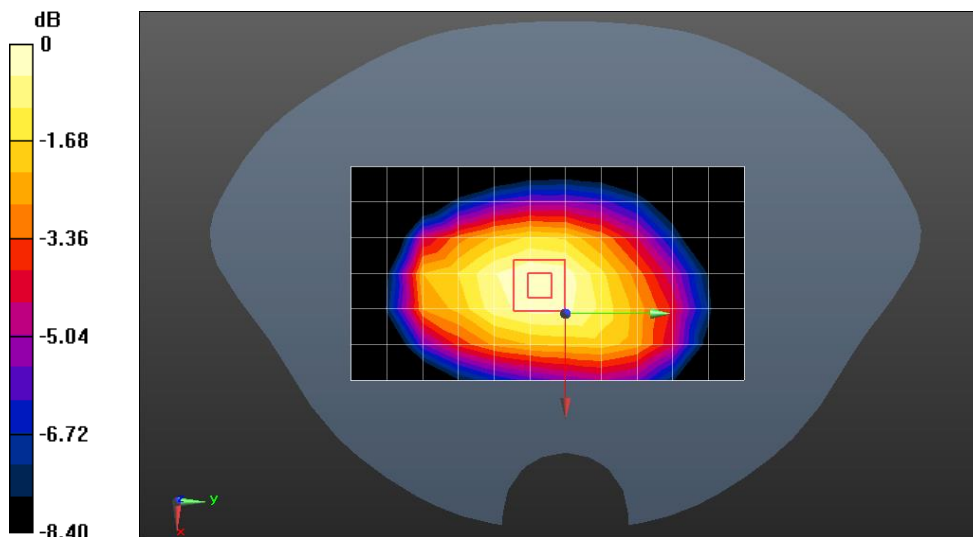

0 dB = 0.456 W/kg = -3.41 dBW/kg

Test Laboratory: Compliance Certification Services Inc.

LTE Band 26 15M QPSK 1RB38 Back side Ch26765 10mm

DUT: Smart PoS; Type: D20; Serial: 12000300120073100115


Communication System: UID 0, FDD_LTE (0); Frequency: 821.5 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 821.5 \text{ MHz}$; $\sigma = 0.895 \text{ S/m}$; $\epsilon_r = 41.917$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section
 Measurement Standard: DASYS5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3798; ConvF(9.41, 9.41, 9.41); Calibrated: 2020/05/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 2020/05/27
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- Measurement SW: DASYS52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Configuration/Body/Area Scan (7x12x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
 Maximum value of SAR (measured) = 0.449 W/kg

Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
 Reference Value = 23.02 V/m; Power Drift = 0.01 dB
 Peak SAR (extrapolated) = 0.495 W/kg
SAR(1 g) = 0.378 W/kg; SAR(10 g) = 0.280 W/kg
 Maximum value of SAR (measured) = 0.456 W/kg

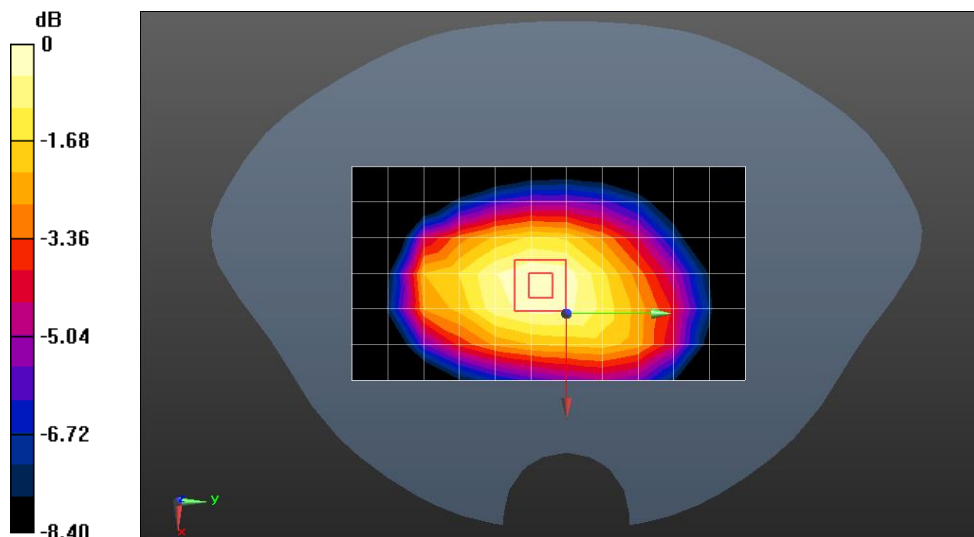

0 dB = 0.456 W/kg = -3.41 dBW/kg

Test Laboratory: Compliance Certification Services Inc.

LTE Band 38 20M QPSK 1RB50 Left cheek Ch37850

DUT: Smart PoS; Type: D20; Serial: 12000300120073100115

Communication System: UID 0, TDD_LTE (0); Frequency: 2580 MHz; Duty Cycle: 1:1.57943

Medium parameters used: $f = 2580$ MHz; $\sigma = 1.97$ S/m; $\epsilon_r = 38.626$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.06, 7.06, 7.06); Calibrated: 2020/05/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 2020/05/27
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Configuration/Body/Area Scan (9x14x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.298 W/kg

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm,


dy=5mm, dz=5mm

Reference Value = 4.085 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.381 W/kg

SAR(1 g) = 0.194 W/kg; SAR(10 g) = 0.1 W/kg

Maximum value of SAR (measured) = 0.309 W/kg

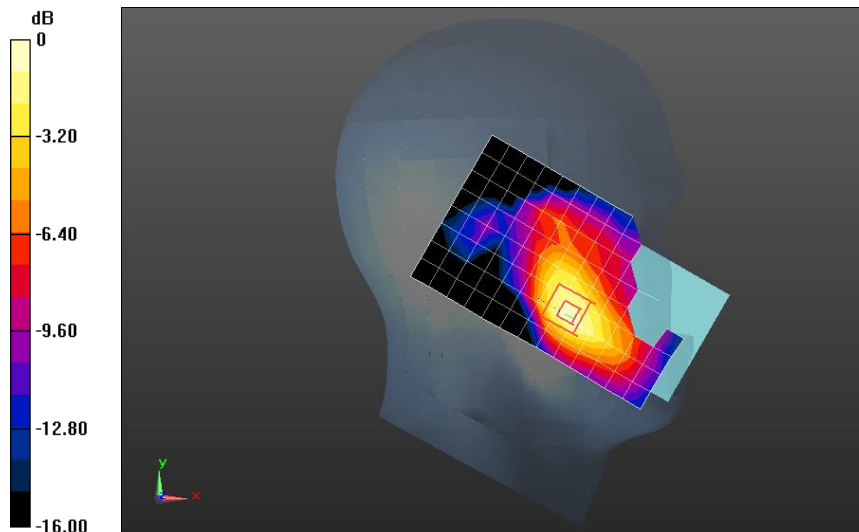

0 dB = 0.309 W/kg = -5.10 dBW/kg

Test Laboratory: Compliance Certification Services Inc.

LTE Band 38 20M QPSK 1RB50 Back side 10mm Ch37850

DUT: Smart PoS; Type: D20; Serial: 12000300120073100115

Communication System: UID 0, TDD_LTE (0); Frequency: 2580 MHz; Duty Cycle: 1:1.57943

Medium parameters used: $f = 2580$ MHz; $\sigma = 1.97$ S/m; $\epsilon_r = 38.626$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.06, 7.06, 7.06); Calibrated: 2020/05/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 2020/05/27
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- Measurement SW: DASYS2, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Configuration/Body/Area Scan (8x13x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.449 W/kg

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm


Reference Value = 4.568 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.668 W/kg

Peak SAR (extrapolated) = 0.668 W/kg

SAR(1 g) = 0.326 W/kg; SAR(10 g) = 0.161 W/kg

Maximum value of SAR (measured) = 0.529 W/kg

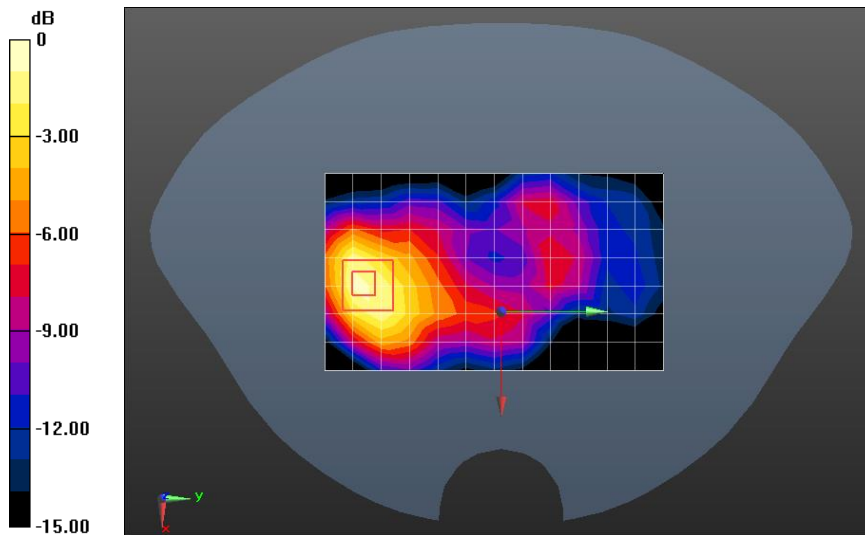

0 dB = 0.529 W/kg = -2.77 dBW/kg

Test Laboratory: Compliance Certification Services Inc.

LTE Band 38 20M QPSK 1RB50 Back side 10mm Ch37850

DUT: Smart PoS; Type: D20; Serial: 12000300120073100115

Communication System: UID 0, TDD_LTE (0); Frequency: 2580 MHz; Duty Cycle: 1:1.57943

Medium parameters used: $f = 2580$ MHz; $\sigma = 1.97$ S/m; $\epsilon_r = 38.626$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.06, 7.06, 7.06); Calibrated: 2020/05/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 2020/05/27
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- Measurement SW: DASYS2, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Configuration/Body/Area Scan (8x13x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.449 W/kg

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm


Reference Value = 4.568 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.668 W/kg

Peak SAR (extrapolated) = 0.668 W/kg

SAR(1 g) = 0.326 W/kg; SAR(10 g) = 0.161 W/kg

Maximum value of SAR (measured) = 0.529 W/kg

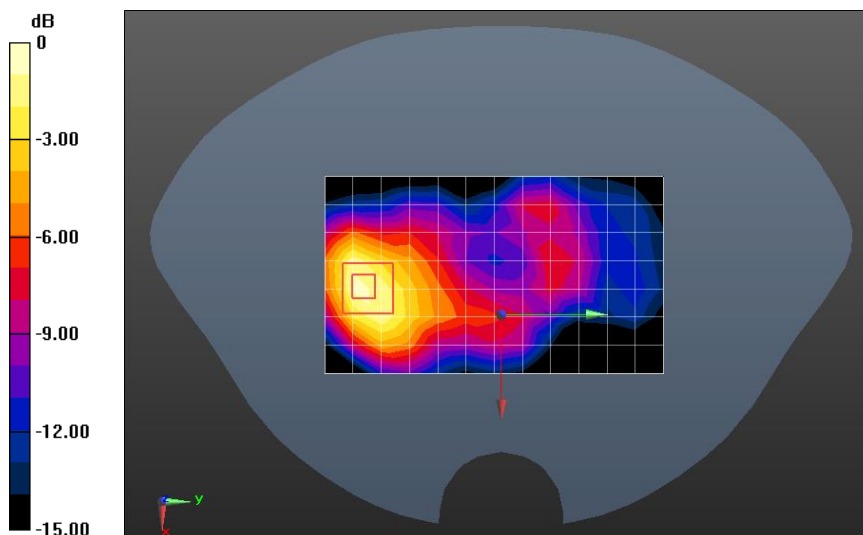

0 dB = 0.529 W/kg = -2.77 dBW/kg

Test Laboratory: Compliance Certification Services Inc.

LTE Band 41 20M QPSK 1RB50 Left cheek Ch41140

DUT: Smart PoS; Type: D20; Serial: 12000300120073100115

Communication System: UID 0, TDD_LTE (0); Frequency: 2645 MHz; Duty Cycle: 1:1.57943

Medium parameters used: $f = 2645$ MHz; $\sigma = 2.041$ S/m; $\epsilon_r = 38.527$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.06, 7.06, 7.06); Calibrated: 2020/05/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 2020/05/27
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Configuration/Body/Area Scan (9x15x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.189 W/kg

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm,


dy=5mm, dz=5mm

Reference Value = 3.416 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.317 W/kg

SAR(1 g) = 0.158 W/kg; SAR(10 g) = 0.08 W/kg

Maximum value of SAR (measured) = 0.249 W/kg

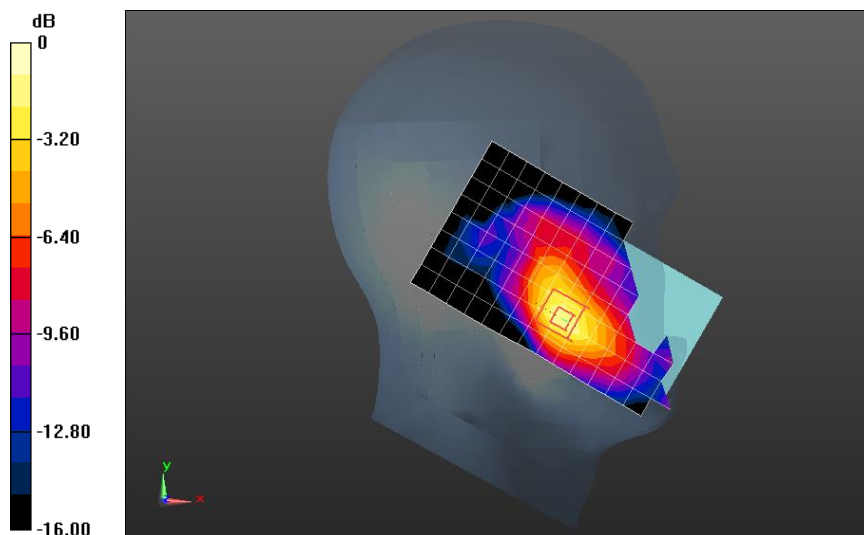

0 dB = 0.249 W/kg = -6.04 dBW/kg

Test Laboratory: Compliance Certification Services Inc.

LTE Band 41 20M QPSK 1RB50 Back side 10mm Ch41140

DUT: Smart PoS; Type: D20; Serial: 12000300120073100115

Communication System: UID 0, TDD_LTE (0); Frequency: 2645 MHz; Duty Cycle: 1:1.57943

Medium parameters used: $f = 2645$ MHz; $\sigma = 2.041$ S/m; $\epsilon_r = 38.527$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.06, 7.06, 7.06); Calibrated: 2020/05/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 2020/05/27
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- Measurement SW: DASYS2, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Configuration/Body/Area Scan (8x13x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.301 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.853 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.465 W/kg

SAR(1 g) = 0.216 W/kg; SAR(10 g) = 0.102 W/kg

Maximum value of SAR (measured) = 0.362 W/kg

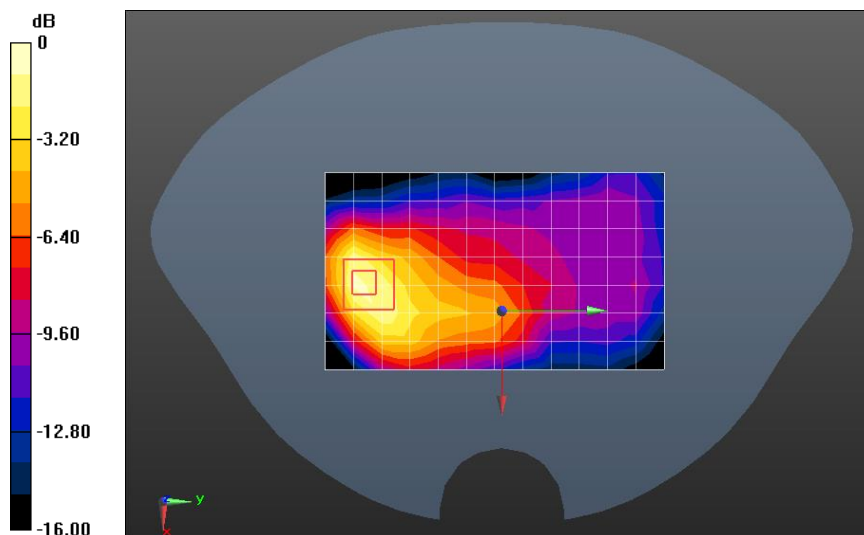

0 dB = 0.362 W/kg = -4.41 dBW/kg

Test Laboratory: Compliance Certification Services Inc.

LTE Band 41 20M QPSK 1RB50 Back side 10mm Ch41140

DUT: Smart PoS; Type: D20; Serial: 12000300120073100115

Communication System: UID 0, TDD_LTE (0); Frequency: 2645 MHz; Duty Cycle: 1:1.57943

Medium parameters used: $f = 2645$ MHz; $\sigma = 2.041$ S/m; $\epsilon_r = 38.527$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.06, 7.06, 7.06); Calibrated: 2020/05/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 2020/05/27
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- Measurement SW: DASYS2, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Configuration/Body/Area Scan (8x13x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.301 W/kg

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm,


dy=5mm, dz=5mm

Reference Value = 5.853 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.465 W/kg

SAR(1 g) = 0.216 W/kg; SAR(10 g) = 0.102 W/kg

Maximum value of SAR (measured) = 0.362 W/kg

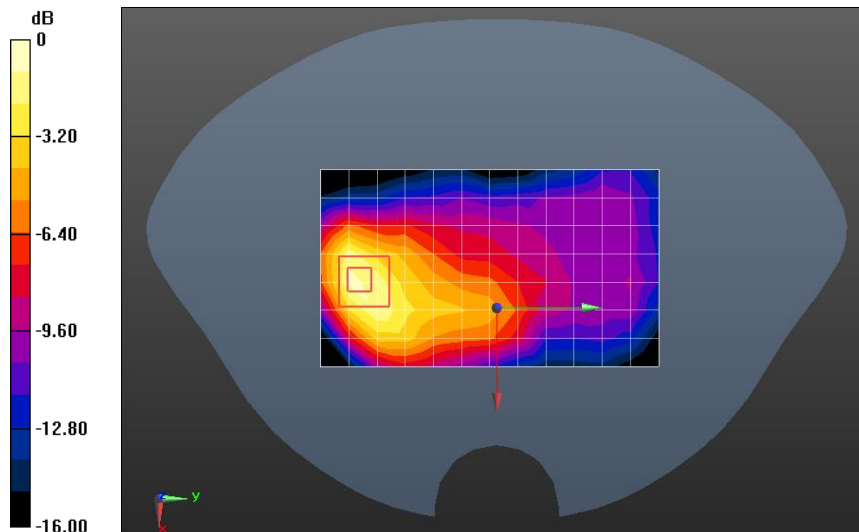

0 dB = 0.362 W/kg = -4.41 dBW/kg

Test Laboratory: Compliance Certification Services Inc.

LTE Band 66 20M QPSK 1RB50 Left cheek Ch132072

DUT: Smart PoS; Type: D20; Serial: 12000300120073100115

Communication System: UID 0, FDD_LTE (0); Frequency: 1720 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 1720$ MHz; $\sigma = 1.316$ S/m; $\epsilon_r = 40.633$; $\rho = 1000$ kg/m³
 Phantom section: Left Section
 Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3798; ConvF(8.13, 8.13, 8.13); Calibrated: 2020/05/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 2020/05/27
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- Measurement SW: DASYS2, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Configuration/Body/Area Scan (8x13x1): Measurement grid: dx=12mm, dy=12mm
 Maximum value of SAR (measured) = 0.348 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.653 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.472 W/kg

SAR(1 g) = 0.277 W/kg; SAR(10 g) = 0.167 W/kg

Maximum value of SAR (measured) = 0.399 W/kg

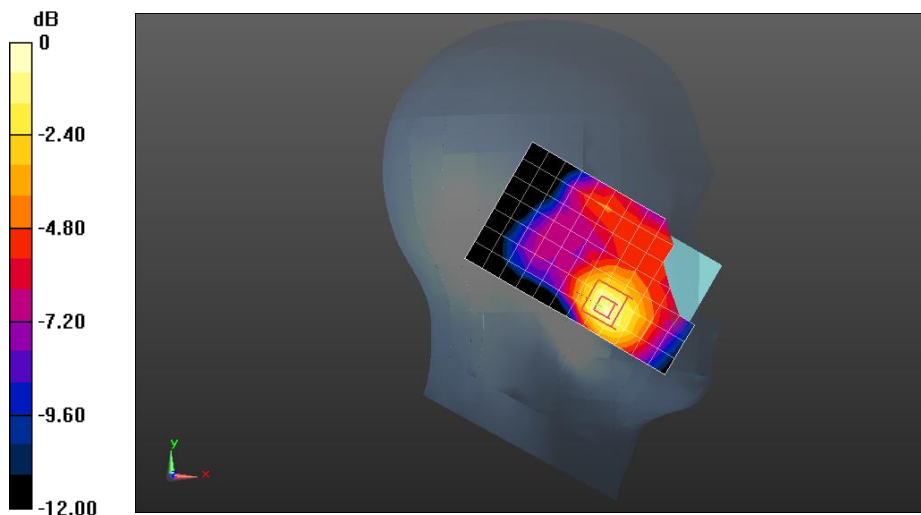

0 dB = 0.399 W/kg = -3.99 dBW/kg

Test Laboratory: Compliance Certification Services Inc.

LTE Band 66 20M QPSK 1RB50 Back side 10mm Ch132072

DUT: Smart PoS; Type: D20; Serial: 12000300120073100115

Communication System: UID 0, FDD_LTE (0); Frequency: 1720 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 1720$ MHz; $\sigma = 1.316$ S/m; $\epsilon_r = 40.633$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section
 Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3798; ConvF(8.13, 8.13, 8.13); Calibrated: 2020/05/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 2020/05/27
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- Measurement SW: DASYS2, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Configuration/Body/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm
 Maximum value of SAR (measured) = 0.806 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.20 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 0.971 W/kg

SAR(1 g) = 0.571 W/kg; SAR(10 g) = 0.350 W/kg

Maximum value of SAR (measured) = 0.813 W/kg

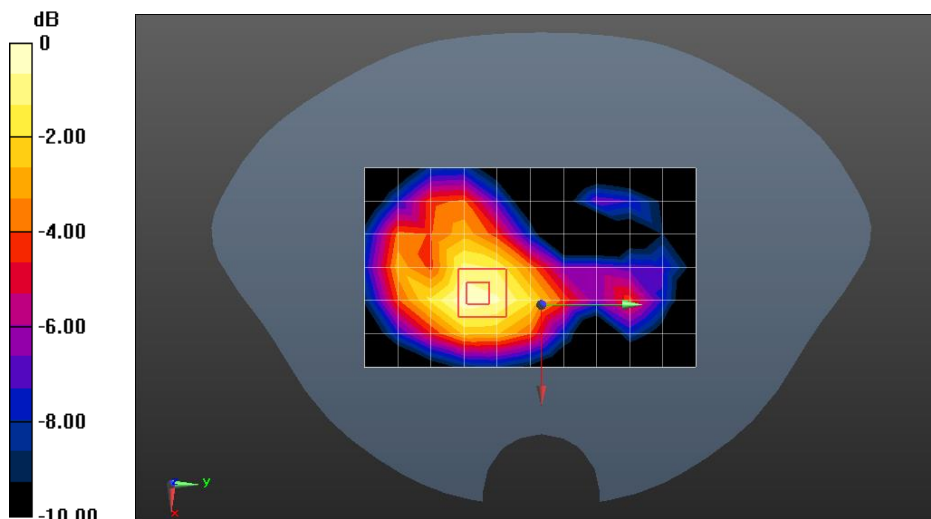

0 dB = 0.813 W/kg = -0.90 dBW/kg

Test Laboratory: Compliance Certification Services Inc.

LTE Band 66 20M QPSK 1RB50 Back side 10mm Ch132072

DUT: Smart PoS; Type: D20; Serial: 12000300120073100115

Communication System: UID 0, FDD_LTE (0); Frequency: 1720 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 1720$ MHz; $\sigma = 1.316$ S/m; $\epsilon_r = 40.633$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section
 Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3798; ConvF(8.13, 8.13, 8.13); Calibrated: 2020/05/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 2020/05/27
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- Measurement SW: DASYS2, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Configuration/Body/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm
 Maximum value of SAR (measured) = 0.806 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.20 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 0.971 W/kg

SAR(1 g) = 0.571 W/kg; SAR(10 g) = 0.350 W/kg

Maximum value of SAR (measured) = 0.813 W/kg

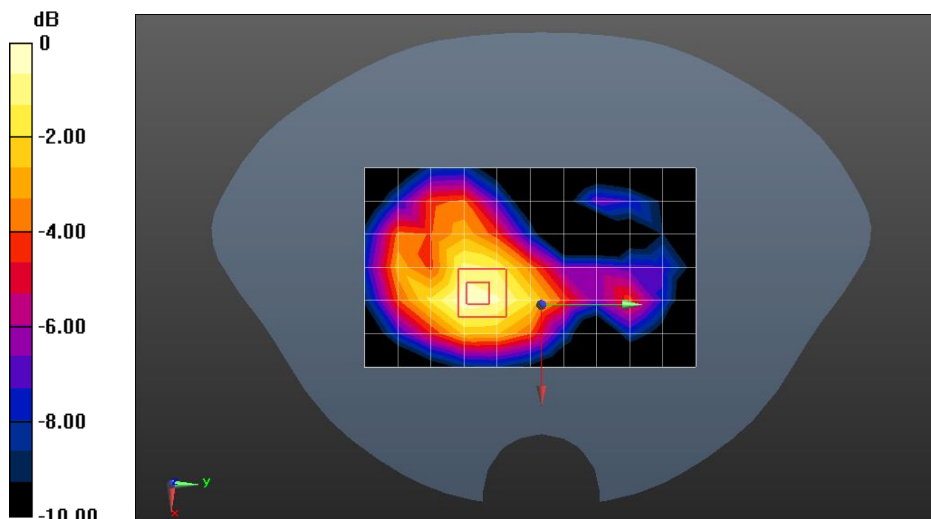

0 dB = 0.813 W/kg = -0.90 dBW/kg

Test Laboratory: Compliance Certification Services Inc.

WLAN2.4G 802.11b 1Mbps Left cheek Ch1

DUT: Smart PoS; Type: D20; Serial: 12000300120073100115


Communication System: UID 0, WiFi (0); Frequency: 2412 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 2412 \text{ MHz}$; $\sigma = 1.77 \text{ S/m}$; $\epsilon_r = 39.324$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Left Section
 Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.27, 7.27, 7.27); Calibrated: 2020/05/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 2020/05/27
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- Measurement SW: DASYS2, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Configuration/Body/Area Scan (8x14x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$
 Maximum value of SAR (measured) = 0.318 W/kg

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$
 Reference Value = 7.162 V/m; Power Drift = 0.06 dB
 Peak SAR (extrapolated) = 0.431 W/kg
SAR(1 g) = 0.222 W/kg; SAR(10 g) = 0.108 W/kg
 Maximum value of SAR (measured) = 0.342 W/kg

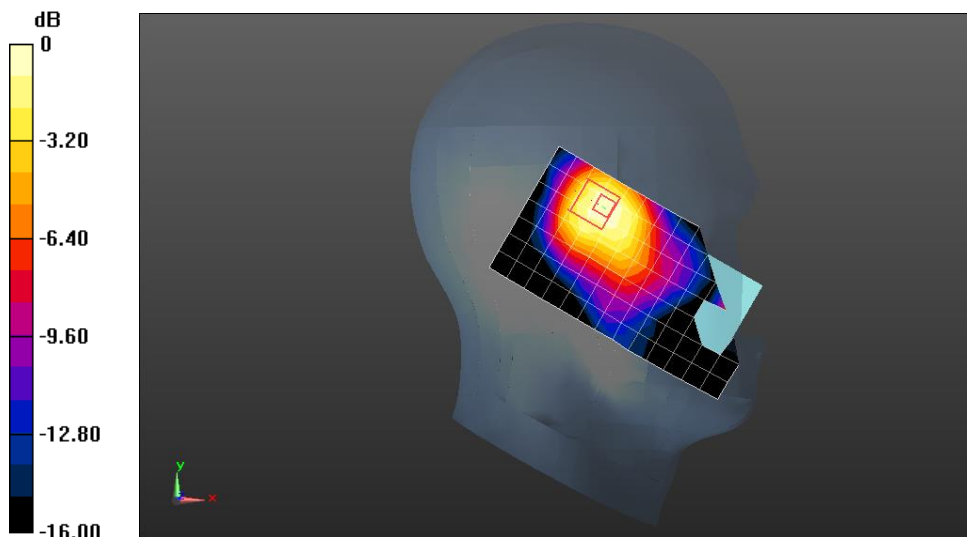

0 dB = 0.342 W/kg = -4.66 dBW/kg

Test Laboratory: Compliance Certification Services Inc.

WLAN2.4G 802.11b 1Mbps Back side Ch1 10mm

DUT: Smart PoS; Type: D20; Serial: 12000300120073100115


Communication System: UID 0, WiFi (0); Frequency: 2412 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 2412$ MHz; $\sigma = 1.77$ S/m; $\epsilon_r = 39.324$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section
 Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.27, 7.27, 7.27); Calibrated: 2020/05/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 2020/05/27
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- Measurement SW: DASYS2, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Configuration/Body/Area Scan (8x13x1): Measurement grid: dx=12mm, dy=12mm
 Maximum value of SAR (measured) = 0.133 W/kg

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
 Reference Value = 5.052 V/m; Power Drift = 0.03 dB
 Peak SAR (extrapolated) = 0.184 W/kg
SAR(1 g) = 0.088 W/kg; SAR(10 g) = 0.045 W/kg
 Maximum value of SAR (measured) = 0.144 W/kg

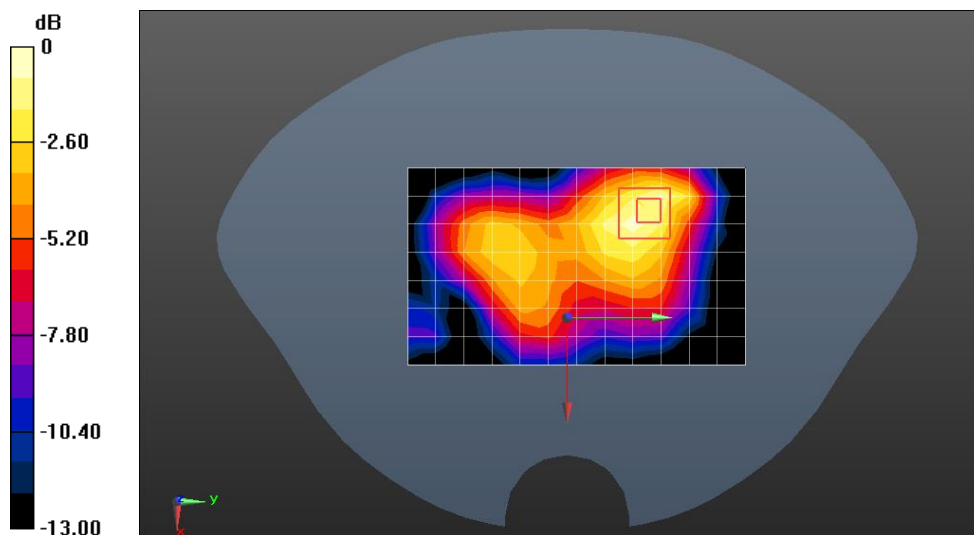

0 dB = 0.144 W/kg = -8.42 dBW/kg

Test Laboratory: Compliance Certification Services Inc.

WLAN2.4G 802.11b 1Mbps Right side Ch1 10mm

DUT: Smart PoS; Type: D20; Serial: 12000300120073100115

Communication System: UID 0, WiFi (0); Frequency: 2412 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 2412 \text{ MHz}$; $\sigma = 1.77 \text{ S/m}$; $\epsilon_r = 39.324$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section
 Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.27, 7.27, 7.27); Calibrated: 2020/05/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 2020/05/27
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- Measurement SW: DASYS2, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Configuration/Body/Area Scan (6x13x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$
 Maximum value of SAR (measured) = 0.191 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 6.810 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 0.250 W/kg

SAR(1 g) = 0.127 W/kg; SAR(10 g) = 0.067 W/kg

Maximum value of SAR (measured) = 0.201 W/kg

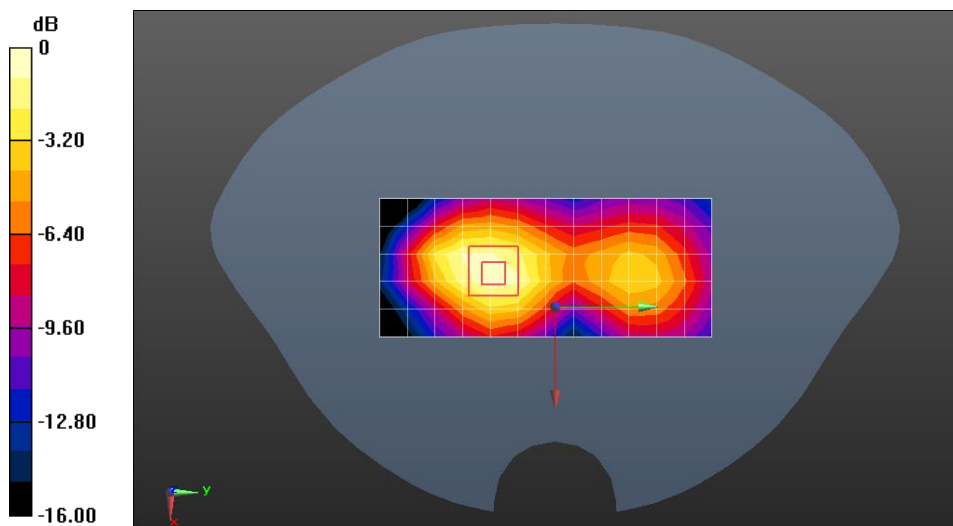

0 dB = 0.201 W/kg = -6.97 dBW/kg

Test Laboratory: Compliance Certification Services Inc.

WLAN5G 802.11a 6Mbps Left cheek Ch52

DUT: Smart PoS; Type: D20; Serial: 12000300120073100115

Communication System: UID 0, WiFi (0); Frequency: 5260 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 5260$ MHz; $\sigma = 4.68$ S/m; $\epsilon_r = 36.274$; $\rho = 1000$ kg/m³
 Phantom section: Left Section
 Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3798; ConvF(4.7, 4.7, 4.7); Calibrated: 2020/05/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 2020/05/27
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- Measurement SW: DASYS2, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Configuration/Body/Area Scan (10x16x1): Measurement grid: dx=10mm, dy=10mm
 Maximum value of SAR (measured) = 0.307 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 4.666 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.673 W/kg

SAR(1 g) = 0.158 W/kg; SAR(10 g) = 0.047 W/kg

Maximum value of SAR (measured) = 0.378 W/kg

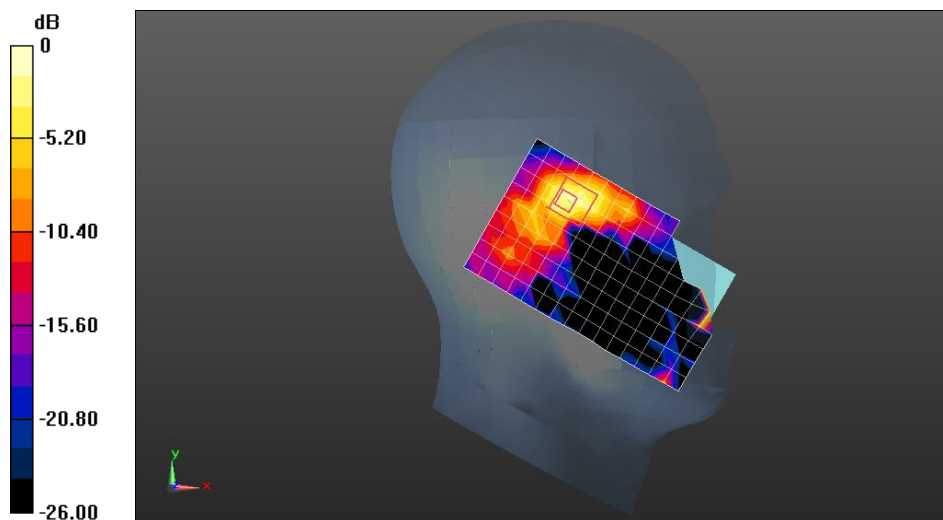

0 dB = 0.378 W/kg = -4.23 dBW/kg

Test Laboratory: Compliance Certification Services Inc.

WLAN5G 802.11a 6Mbps Left cheek Ch149

DUT: Smart PoS; Type: D20; Serial: 12000300120073100115

Communication System: UID 0, WiFi (0); Frequency: 5745 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 5745 \text{ MHz}$; $\sigma = 5.291 \text{ S/m}$; $\epsilon_r = 35.481$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Left Section
 Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3798; ConvF(4.58, 4.58, 4.58); Calibrated: 2020/05/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 2020/05/27
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- Measurement SW: DASYS2, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Configuration/Body/Area Scan (10x16x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$
 Maximum value of SAR (measured) = 0.283 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=4\text{mm}$,
 $dy=4\text{mm}$, $dz=1.4\text{mm}$

Reference Value = 0 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.497 W/kg

SAR(1 g) = 0.108 W/kg; SAR(10 g) = 0.029 W/kg

Maximum value of SAR (measured) = 0.299 W/kg

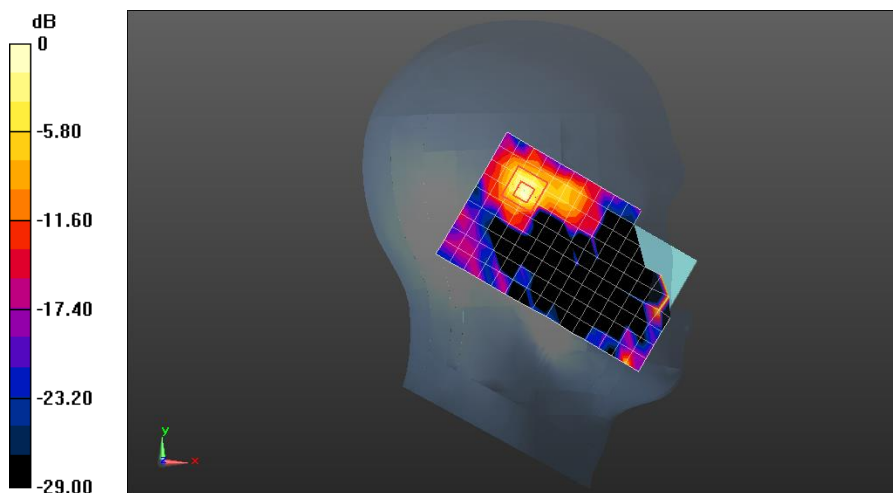

0 dB = 0.299 W/kg = -5.24 dBW/kg

Test Laboratory: Compliance Certification Services Inc.

WLAN5G 802.11a 6Mbps Back side Ch48 10mm

DUT: Smart PoS; Type: D20; Serial: 12000300120073100115


Communication System: UID 0, WiFi (0); Frequency: 5240 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 5240 \text{ MHz}$; $\sigma = 4.636 \text{ S/m}$; $\epsilon_r = 36.251$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section
 Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3798; ConvF(4.7, 4.7, 4.7); Calibrated: 2020/05/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 2020/05/27
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- Measurement SW: DASYS2, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Configuration/Body/Area Scan (10x16x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$
 Maximum value of SAR (measured) = 0.164 W/kg

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=4\text{mm}$,
 $dy=4\text{mm}$, $dz=1.4\text{mm}$
 Reference Value = 0.2290 V/m; Power Drift = 0.03 dB
 Peak SAR (extrapolated) = 0.275 W/kg
SAR(1 g) = 0.070 W/kg; SAR(10 g) = 0.021 W/kg
 Maximum value of SAR (measured) = 0.174 W/kg

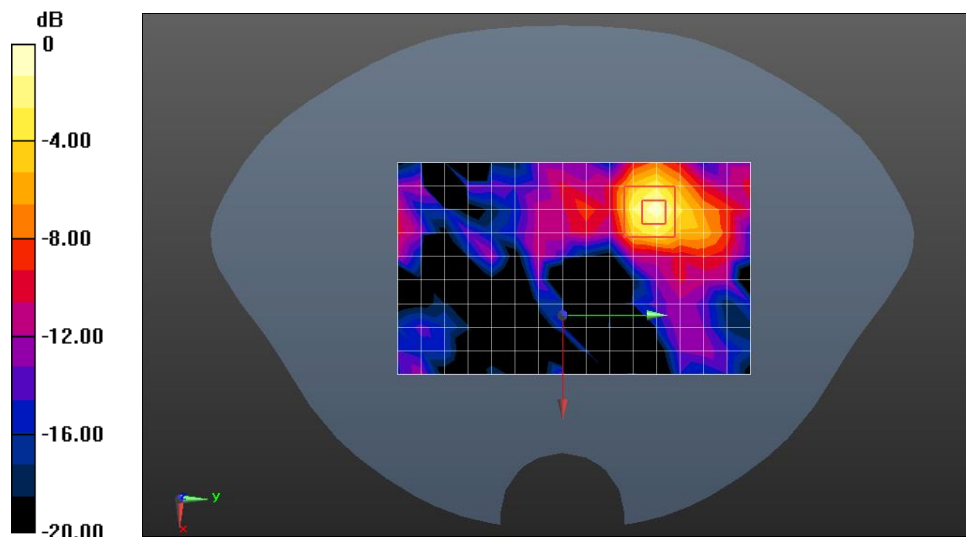

0 dB = 0.174 W/kg = -7.59 dBW/kg

Test Laboratory: Compliance Certification Services Inc.

WLAN5G 802.11a 6Mbps Back side Ch52 10mm

DUT: Smart PoS; Type: D20; Serial: 12000300120073100115

Communication System: UID 0, WiFi (0); Frequency: 5260 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 5260 \text{ MHz}$; $\sigma = 4.68 \text{ S/m}$; $\epsilon_r = 36.274$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section
 Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3798; ConvF(4.7, 4.7, 4.7); Calibrated: 2020/05/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 2020/05/27
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- Measurement SW: DASYS2, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Configuration/Body/Area Scan (10x16x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$
 Maximum value of SAR (measured) = 0.196 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=4\text{mm}$,
 $dy=4\text{mm}$, $dz=1.4\text{mm}$

Reference Value = 1.061 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.773 W/kg

SAR(1 g) = 0.073 W/kg; SAR(10 g) = 0.022 W/kg

Maximum value of SAR (measured) = 0.186 W/kg

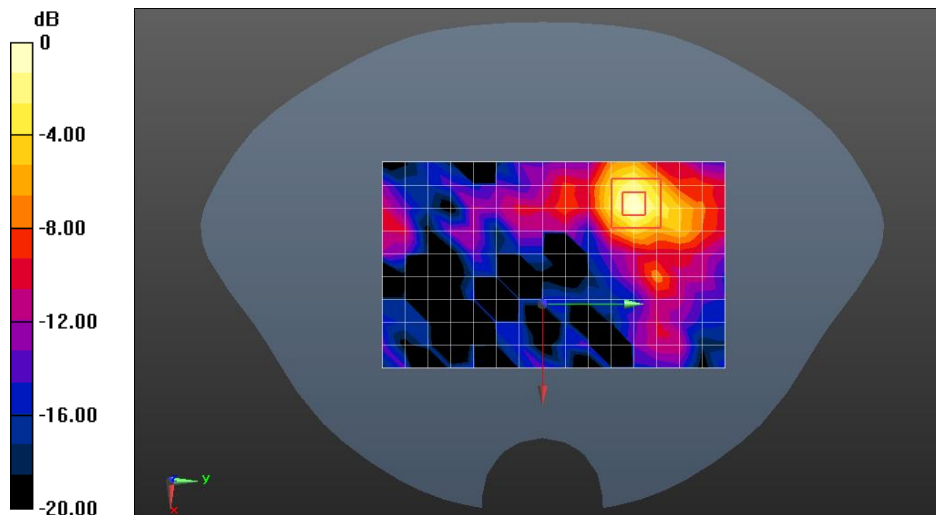

0 dB = 0.186 W/kg = -7.30 dBW/kg

Test Laboratory: Compliance Certification Services Inc.

WLAN5G 802.11a 6Mbps Back side Ch149 10mm

DUT: Smart PoS; Type: D20; Serial: 12000300120073100115


Communication System: UID 0, WiFi (0); Frequency: 5745 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 5745 \text{ MHz}$; $\sigma = 5.291 \text{ S/m}$; $\epsilon_r = 35.481$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section
 Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3798; ConvF(4.58, 4.58, 4.58); Calibrated: 2020/05/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 2020/05/27
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- Measurement SW: DASYS2, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Configuration/Body/Area Scan (10x16x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$
 Maximum value of SAR (measured) = 0.289 W/kg

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=4\text{mm}$,
 $dy=4\text{mm}$, $dz=1.4\text{mm}$
 Reference Value = 0 V/m; Power Drift = 0.01 dB
 Peak SAR (extrapolated) = 0.510 W/kg
SAR(1 g) = 0.117 W/kg; SAR(10 g) = 0.039 W/kg
 Maximum value of SAR (measured) = 0.292 W/kg

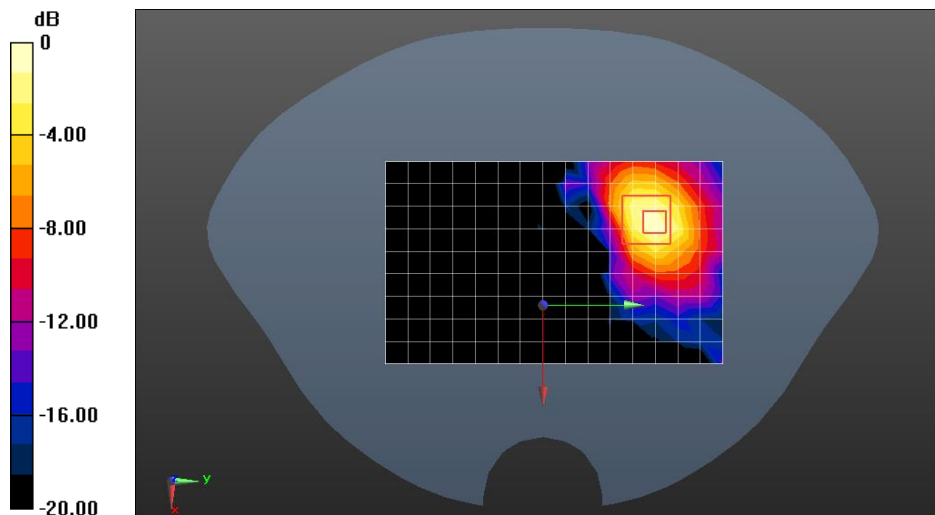

0 dB = 0.292 W/kg = -5.35 dBW/kg

Test Laboratory: Compliance Certification Services Inc.

Bluetooth GFSK 1Mbps Left cheek Ch0

DUT: Smart PoS; Type: D20; Serial: 12000300120073100115

Communication System: UID 0, Bluetooth (0); Frequency: 2402 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 2402 \text{ MHz}$; $\sigma = 1.765 \text{ S/m}$; $\epsilon_r = 39.331$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Left Section
 Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.27, 7.27, 7.27); Calibrated: 2020/05/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 2020/05/27
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- Measurement SW: DASYS2, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Configuration/Body/Area Scan (8x9x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$
 Maximum value of SAR (measured) = 0.0626 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$,
 $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 2.726 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.0810 W/kg

SAR(1 g) = 0.042 W/kg; SAR(10 g) = 0.023 W/kg

Maximum value of SAR (measured) = 0.0657 W/kg

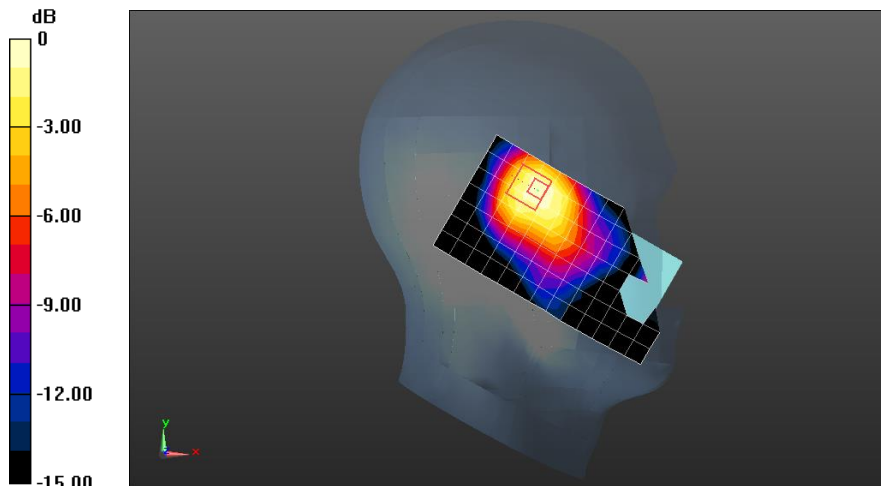

0 dB = 0.0657 W/kg = -11.82 dBW/kg

Test Laboratory: Compliance Certification Services Inc.

Bluetooth GFSK 1Mbps Back side Ch0 10mm

DUT: Smart PoS; Type: D20; Serial: 12000300120073100115

Communication System: UID 0, Bluetooth (0); Frequency: 2402 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 2402 \text{ MHz}$; $\sigma = 1.765 \text{ S/m}$; $\epsilon_r = 39.331$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section
 Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.27, 7.27, 7.27); Calibrated: 2020/05/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 2020/05/27
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- Measurement SW: DASYS2, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Configuration/Body/Area Scan (8x14x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$
 Maximum value of SAR (measured) = 0.0181 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$,
 $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 0 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.0260 W/kg

SAR(1 g) = 0.013 W/kg; SAR(10 g) = 0.006 W/kg

Maximum value of SAR (measured) = 0.022 W/kg

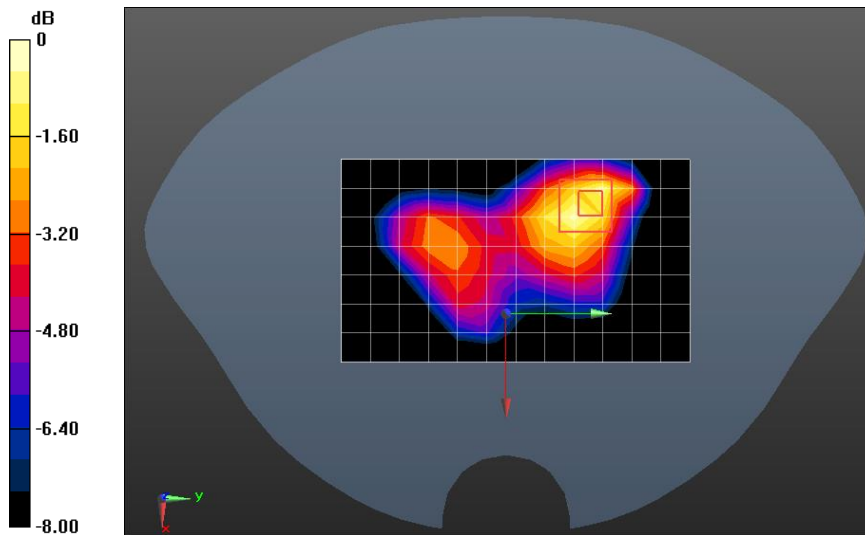

0 dB = 0.022 W/kg = -16.58 dBW/kg

Test Laboratory: Compliance Certification Services Inc.

Bluetooth GFSK 1Mbps Right side Ch0 10mm

DUT: Smart PoS; Type: D20; Serial: 12000300120073100115

Communication System: UID 0, Bluetooth (0); Frequency: 2402 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 2402 \text{ MHz}$; $\sigma = 1.765 \text{ S/m}$; $\epsilon_r = 39.331$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section
 Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.27, 7.27, 7.27); Calibrated: 2020/05/29;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 2020/05/27
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- Measurement SW: DASYS2, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Configuration/Body/Area Scan (5x13x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$
 Maximum value of SAR (measured) = 0.0411 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 2.939 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 0.0460 W/kg

SAR(1 g) = 0.024 W/kg; SAR(10 g) = 0.011 W/kg

Maximum value of SAR (measured) = 0.0364 W/kg

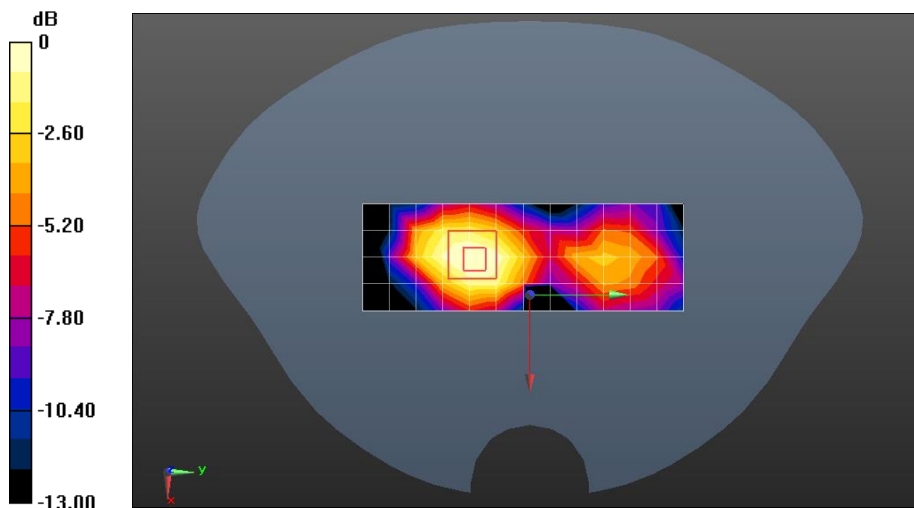

0 dB = 0.0364 W/kg = -14.39 dBW/kg



**Compliance Certification Services
(Kunshan) Inc.**

Report No.: KSEM201200154501

Page: 165 of 165

Appendix C: Calibration certificate

Appendix D: Photographs

---END---
