

# TEST REPORT

For

**NFC Android Reader**

**Model Number: FX105F**

**FCC ID: 2AGQIFX105F**

**Report Number : WT208000771**

Test Laboratory : Shenzhen Academy of Metrology and Quality Inspection  
Site Location : NETC Building, No.4 Tongfa Rd., Xili, Nanshan, Shenzhen, China  
Tel : 0086-755-86928965  
Fax : 0086-755-86009898-31396  
Web : [www.smq.com.cn](http://www.smq.com.cn)  
E-mail : [emcrf@smq.com.cn](mailto:emcrf@smq.com.cn)

## Test report declaration


Applicant : FAMOCO SAS  
Address : 59 avenue Victor Hugo,Paris,France  
Manufacturer : FAMOCO SAS  
Address : 59 avenue Victor Hugo,Paris,France  
EUT Description : NFC Android Reader  
Model No. : FX105F  
Trade mark : Famoco  
Serial Number : /  
FCC ID : 2AGQIFX105F

### Test Standards:

FCC Part 15 15.207, 15.209, 15.247 (2019)

The EUT described above is tested by Shenzhen Academy of Metrology and Quality Inspection EMC Laboratory to determine the maximum emissions from the EUT. Shenzhen Academy of Metrology and Quality Inspection EMC Laboratory is assumed full responsibility for the accuracy of the test results.

The test report is valid for above tested sample only and shall not be reproduced in part without written approval of the laboratory.

Project Engineer:		Date:	Jun.03, 2020
	(Zhou Fangai 周芳媛)		
Checked by:		Date:	Jun.03, 2020
	(Lin Yixiang 林奕翔)		
Approved by:		Date:	Jun.03, 2020
	(Lin Bin 林斌)		

## TABLE OF CONTENTS

<b>TEST REPORT DECLARATION.....</b>	<b>2</b>
<b>1. TEST RESULTS SUMMARY .....</b>	<b>5</b>
<b>2. GENERAL INFORMATION.....</b>	<b>6</b>
2.1. Report information.....	6
2.2. Laboratory Accreditation and Relationship to Customer .....	6
2.3. Measurement Uncertainty .....	6
<b>3. PRODUCT DESCRIPTION .....</b>	<b>6</b>
3.1. EUT Description .....	8
3.2. Related Submittal(s) / Grant (s).....	8
3.3. Block Diagram of EUT Configuration .....	8
3.4. Operating Condition of EUT .....	8
3.5. Support Equipment List.....	8
3.6. Test Conditions .....	9
3.7. Special Accessories .....	9
3.8. Equipment Modifications .....	9
<b>4. TEST EQUIPMENT USED.....</b>	<b>10</b>
<b>5. CONDUCTED EMISSION TEST.....</b>	<b>11</b>
5.1. Test Standard and Limit .....	11
5.2. Test Procedure.....	11
5.3. Test Arrangement .....	11
5.4. Test Data.....	11
<b>6. RADIATED EMISSION TEST .....</b>	<b>15</b>
6.1. Test Standard and Limit .....	15
6.2. Test Procedure.....	15
6.3. Test Arrangement .....	15
6.4. Test Data.....	16
<b>7. 20DB BANDWIDTH MEASUREMENT .....</b>	<b>34</b>
7.1. LIMITS OF 20dB BANDWIDTH MEASUREMENT.....	34
7.2. TEST PROCEDURE .....	34
7.3. TEST SETUP .....	34
7.4. Test Data.....	34
<b>8. CARRIER FREQUENCY SEPARATION MEASUREMENT .....</b>	<b>37</b>
8.1. LIMITS OF Carrier frequency separation measurement .....	37
8.2. TEST PROCEDURES.....	37
8.3. TEST SETUP .....	37
8.4. Test Data.....	37
<b>9. NUMBER OF HOPPING CHANNEL.....</b>	<b>40</b>
9.1. LIMITS OF 9. NUMBER OF HOPPING CHANNEL.....	40
9.2. TEST PROCEDURE .....	40
9.3. TEST SETUP .....	40
9.4. Test Data.....	41
<b>10. TIME OF OCCUPANCY.....</b>	<b>42</b>

10.1.	LIMITS OF TIME OF OCCUPANCY.....	42
10.2.	TEST PROCEDURE.....	42
10.3.	TEST RESULTS.....	43
<b>11.</b>	<b>PEAK POWER.....</b>	<b>47</b>
11.1.	LIMITS OF Peak Power.....	47
11.2.	TEST PROCEDURE.....	47
11.3.	TEST RESULTS.....	47
<b>12.</b>	<b>BAND EDGES MEASUREMENT.....</b>	<b>50</b>
12.1.	Limits of Band Edges Measurement.....	50
12.2.	TEST PROCEDURE.....	50
12.3.	Test Results.....	50
<b>13.</b>	<b>CONDUCTED SPURIOUS EMISSIONS.....</b>	<b>59</b>
13.1.	Limits of Band Edges Measurement.....	59
13.2.	Test Procedure .....	59
13.3.	TEST RESULTS.....	59
<b>14.</b>	<b>ANTENNA REQUIREMENTS.....</b>	<b>64</b>
14.1.	Applicable requirements .....	64
14.2.	Antenna Connector.....	64
14.3.	Antenna Gain.....	64

## 1. TEST RESULTS SUMMARY

Table 1 Test Results Summary

Test Items	FCC Rules	Test Results
20dB bandwidth measurement	15.247 (a) (1)	Pass
Carrier frequency separation measurement	15.247 (a) (1)	Pass
Number of hopping channel	15.247 (a) (1) III	Pass
Time of occupancy	15.247 (a) (1) III	Pass
Peak output power	15.247 (b) (1)	Pass
Band edge compliance measurement	15.247 (d)	Pass
Radiated spurious emission & Radiated restricted band measurement	15.247 (d) / 15.205 & 15.209	Pass
Conducted spurious emissions	15.247 (d)	Pass
Conducted emission	15.207	Pass
Antenna Requirement	15.203	Pass

Remark: "N/A" means "Not applicable."

## 2. GENERAL INFORMATION

### 2.1. Report information

This report is not a certificate of quality; it only applies to the sample of the specific product/equipment given at the time of its testing. The results are not used to indicate or imply that they are application to the similar items. In addition, such results must not be used to indicate or imply that SMQ approves recommends or endorses the manufacture, supplier or use of such product/equipment, or that SMQ in any way guarantees the later performance of the product/equipment.

The sample/s mentioned in this report is/are supplied by Applicant, SMQ therefore assumes no responsibility for the accuracy of information on the brand name, model number, origin of manufacture or any information supplied.

Additional copies of the report are available to the Applicant at an additional fee. No third part can obtain a copy of this report through SMQ, unless the applicant has authorized SMQ in writing to do so.

### 2.2. Laboratory Accreditation and Relationship to Customer

The testing report were performed by the Shenzhen Academy of Metrology and quality Inspection EMC Laboratory (Guangdong EMC compliance testing center), in their facilities located at NETC Building, No.4 Tongfa Rd., Xili, Nanshan, Shenzhen, China. At the time of testing, Laboratory is accredited by the following organizations:

China National Accreditation Service for Conformity Assessment (CNAS) accredits the Laboratory for conformance to FCC standards, EMC international standards and EN standards. The Registration Number is CNAS L0579.

The Laboratory is Accredited Testing Laboratory of FCC with Designation number CN1165 and Site registration number 582918.

The Laboratory is registered to perform emission tests with Innovation, Science and Economic Development (ISED), and the registration number is 11177A.

The Laboratory is registered to perform emission tests with VCCI, and the registration number are C-20048, G20076, R-20077, R-20078 and T-20047.

The Laboratory is Accredited Testing Laboratory of American Association for Laboratory Accreditation (A2LA) and certificate number is 3292.01.

### 2.3. Measurement Uncertainty

Conducted Emission  
9 kHz~30MHz 2.9dB

Radiated Emission

30MHz~1000MHz 5.1dB

1GHz~6GHz 5.04dB

6GHz~18GHz 5.54dB

18GHz~26.5GHz 5.54dB

### 3. PRODUCT DESCRIPTION

#### 3.1. EUT Description

Description : NFC Android Reader  
Manufacturer : FAMOCO SAS  
Model Number : FX105F  
Operate Frequency : 2.402GHz~2.480GHz  
Antenna Designation : BT: PIFA ANTENNA  
Operating voltage : 3.6V (Low)/3.7V (Nominal)/ 4.2V (Max)  
Software Version : MOLY.LR12A.R2.MP.V44.1  
Hardware Version : FX105\_MB\_V2.0  
Remark: EUT, adaptor, Docking Station and USB Cable all come in two colors, white and black.

#### 3.2. Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for FCC ID: **2AGQIFX105F** filing to comply with Section 15.207, 15.209, 15.247 of the FCC Part 15, Subpart C .

#### 3.3. Block Diagram of EUT Configuration



Figure 1 EUT setup

#### 3.4. Operating Condition of EUT

The transmitter has a maximum peak conducted output power of Basic rate GFSK modulation and EDR mode 8DPSK modulation. Tests were performed with Basic rate GFSK modulation and EDR mode 8DPSK modulation.

#### 3.5. Support Equipment List

**Table 2 Support Equipment List**

Name	Model No	S/N	Manufacturer
Adaptor for EUT	HJ-0501000E1-US	--	Shenzhen HuaJin Electronics CO.,LTD
Battery for EUT	FX105 series	--	Shen Zhen JiaYuan TongDa Technoligy Co.,Ltd
USB for EUT	--	--	--

### **3.6. Test Conditions**

Date of test : May.13, 2020- May.28, 2020

Date of EUT Receive : Apr.26, 2020

Temperature: 22°C-26 °C

Relative Humidity: 41%-53%

### **3.7. Special Accessories**

Not available for this EUT intended for grant.

### **3.8. Equipment Modifications**

Not available for this EUT intended for grant.

## 4. TEST EQUIPMENT USED

Table 3 Test Equipment

No.	Equipment	Manufacturer	Model No.	Last Cal.	Cal. Interval
SB9058/05	Test Receiver	R&S	ESCI 3	Sep.27,2019	1 Year
SB4357	AMN	R&S	ENN216	Aug.27,2019	1 Year
SB3436	Test Receiver	R&S	ESI26	Nov.07,2019	1 Year
SB3955	Broadband Antenna	Schwarzbeck	VULB 9163	Jan.10,2020	1 Year
SB8501/09	Test Receiver	R&S	ESU40	Feb.14,2020	1 Year
SB3435	Horn Antenna	R&S	HF906	Dec.17,2019	1 Year
SB5472/02	Broadband Antenna	Schwarzbeck	VULB 9163	Jan.10,2020	1 Year
SB9058/03	Pre-Amplifier	R&S	SCU 18	Feb.14,2020	1 Year
SB8501/10	Horn Antenna	R&S	3160-09	Mar.10,2020	3 Years
SB8501/11	Horn Antenna	R&S	3160-09	Mar.09,2020	3 Years
SB8501/12	Horn Antenna	R&S	3160-10	Mar.17,2020	3 Years
SB8501/13	Horn Antenna	R&S	3160-10	Mar.10,2020	3 Years
SB3345	Loop Antenna	Schwarzbeck	FMZB1516-113	Feb.14,2020	1 Year
SB8501/14	Pre-Amplifier	R&S	SCU-03	Feb.14,2020	1 Year
SB8501/15	Pre-Amplifier	R&S	SCU-03	Feb.14,2020	1 Year
SB8501/16	Pre-Amplifier	R&S	SCU 26	Feb.14,2020	1 Year
SB8501/17	Pre-Amplifier	R&S	SCU-18	Feb.14,2020	1 Year
SB9060	Signal Analyzer	R&S	FSQ40	May.18, 2020	1 Year
SB13989	Wireless Wideband Communication Tester	R&S	CMW270	May.18, 2020	1 Year

## 5. CONDUCTED EMISSION TEST

### 5.1. Test Standard and Limit

#### 5.1.1. Test Standard

FCC Part 15 15.207

#### 5.1.2. Test Limit

Table 4 Conducted Emission Test Limit

Frequency	Maximum RF Line Voltage (dB $\mu$ V)	
	Quasi-peak Level	Average Level
150kHz~500kHz	66 ~ 56 *	56 ~ 46 *
500kHz~5MHz	56	46
5MHz~30MHz	60	50

\* Decreasing linearly with logarithm of the frequency

\* The lower limit shall apply at the transition frequency.

### 5.2. Test Procedure

The EUT is put on a table of non-conducting material that is 80cm high. The vertical conducting wall of shielding is located 40cm to the rear of the EUT. The power line of the EUT is connected to the AC mains through a Artificial Mains Network (A.M.N.). A EMI test receiver (R&S Test Receiver ESCS30) is used to test the emissions form both sides of AC line.

Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-Peak and average detector mode.

The bandwidth of EMI test receiver is set at 9 kHz.

### 5.3. Test Arrangement

The arrangement of the equipment is installed to meet the standards and operating in a manner, which tends to maximize its emission characteristics in a normal application. The detailed information refers to test picture.

### 5.4. Test Data

The emissions don't show in below are too low against the limits. Refer to the test curves.

Table 5 Conducted Emission Test Data

Model No.: FX105F								
Test mode: Charging and Transmitting								
	Frequency (MHz)	Correction Factor (dB)	Quasi-Peak			Average		
			Reading (dB $\mu$ V)	Emission Level (dB $\mu$ V)	Limits (dB $\mu$ V)	Reading (dB $\mu$ V)	Emission Level (dB $\mu$ V)	Limits (dB $\mu$ V)
Line	0.483	9.7	30.8	40.5	56.3	17.0	26.7	46.3
	1.666	9.8	31.3	41.1	56	18.3	28.1	46
	3.714	9.9	29.8	39.7	56	18.2	28.1	46
	4.632	9.9	27.7	37.6	56	16.6	26.5	46
	6.616	10.0	31.3	41.3	60	20.7	30.7	50
	7.026	10.0	31.7	41.7	60	21.7	31.7	50
Neutral	1.666	9.8	28.0	37.8	56	15.8	25.6	46
	3.637	9.9	25.7	35.6	56	15.8	25.7	46
	4.227	9.9	26.2	36.1	56	15.0	24.9	46
	4.974	9.9	27.0	36.9	56	16.3	26.2	46
	6.625	10.0	29.6	39.6	60	19.6	29.6	50
	7.422	10.0	27.6	37.6	60	18.6	28.6	50

REMARKS:


1. Emission level (dB $\mu$ V) =Read Value (dB $\mu$ V) + Correction Factor (dB)
2. Correction Factor (dB) =LISN Factor (dB) + Cable Factor (dB) +Limiter Factor (dB)
3. The other emission levels were very low against the limit.

EUT: FX105F

Operating Condition: Charging and Transmitting

Test Specification: L

Test Voltage: AC 120V/60Hz

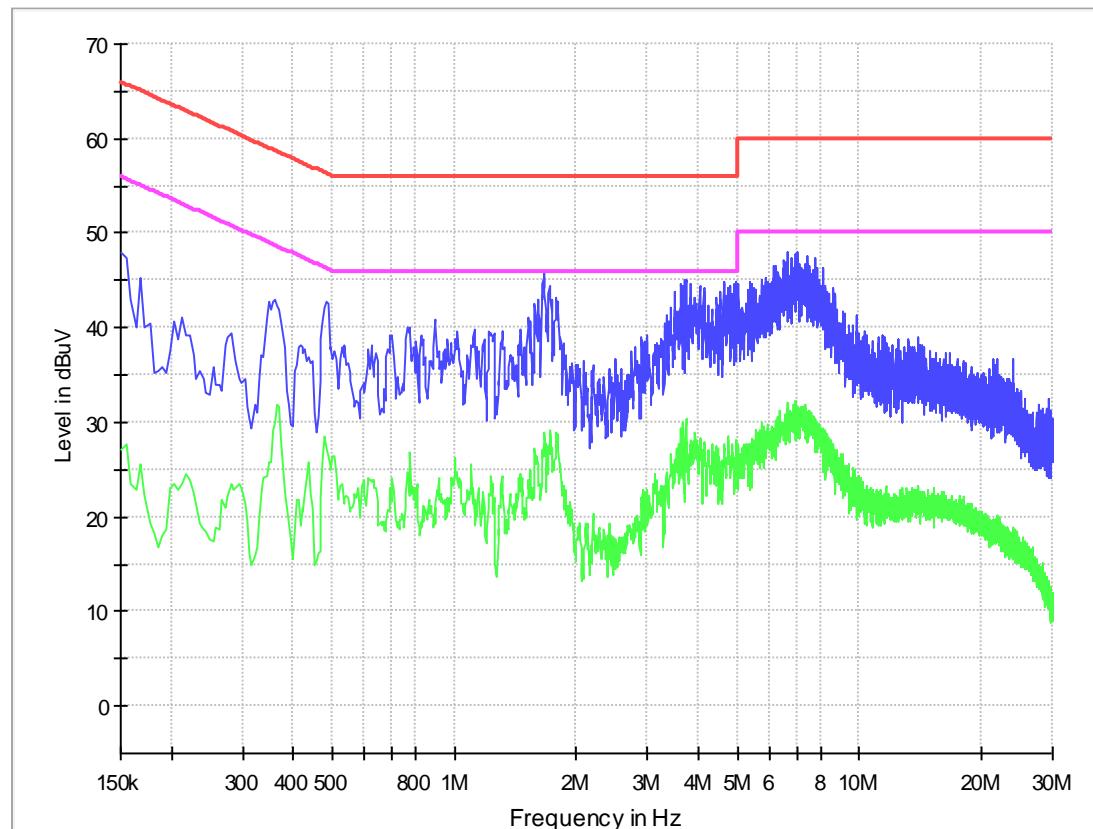


EUT: FX105F

Operating Condition: Charging and Transmitting

Test Specification: N

Test Voltage: AC 120V/60Hz

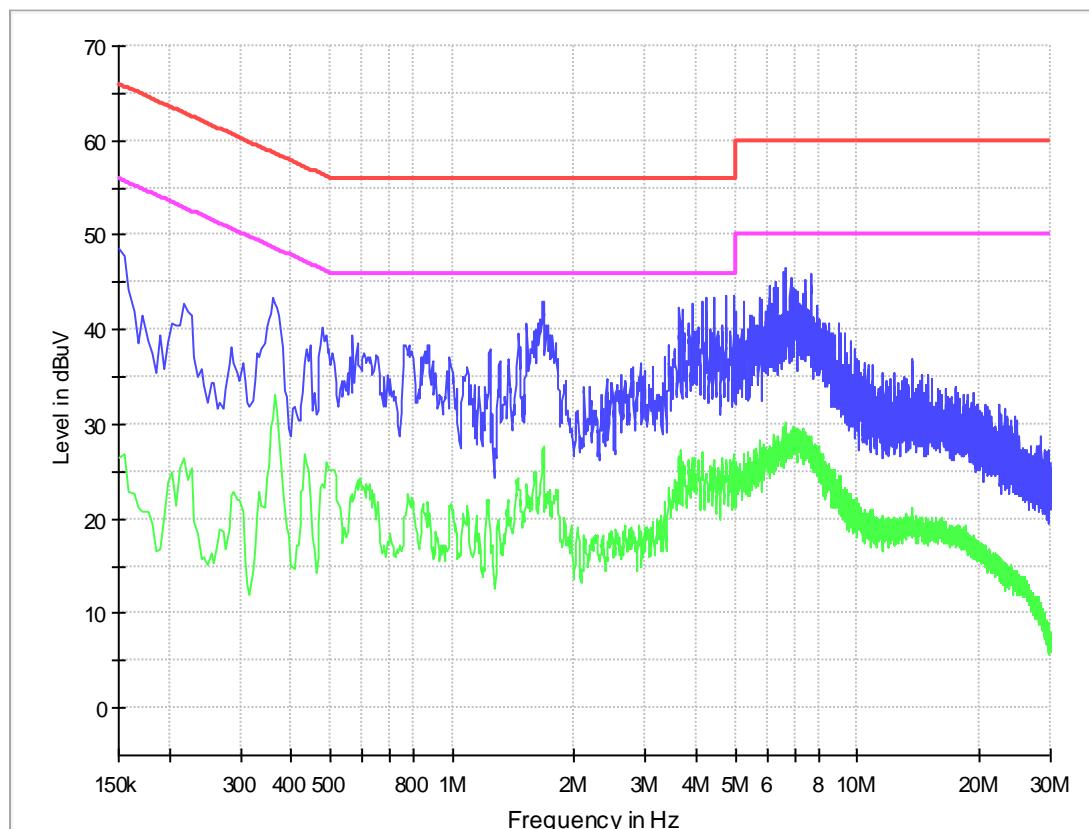

## 6. RADIATED EMISSION TEST

### 6.1. Test Standard and Limit

#### 6.1.1. Test Standard

FCC Part 15 15.209

#### 6.1.2. Test Limit

Table 6 Radiation Emission Test Limit for FCC (Class B) (9 kHz-1GHz)

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
960~1000	500	3

Table 7 Radiation Emission Test Limit for FCC (Class B) (Above 1G)

Frequency (MHz)	(dBuV/m) (at 3 meters)	
	PEAK	AVERAGE
Above 1000	74	54

\* The lower limit shall apply at the transition frequency.

\* The test distance is 3m.

### 6.2. Test Procedure

The EUT is placed on a non-conducting table 80 cm above the ground plane for measurement below 1GHz; 1.5 m above the ground plane for measurement above 1GHz. The antenna to EUT distance is 3 meters. The EUT is configured in accordance with ANSI C63.10-2013. The EUT is set to transmit in a continuous mode. Radiated measurements were performed on the frequency range from 30MHz to 25GHz. All readings from 30 MHz to 1 GHz are quasi-peak values with a resolution bandwidth of 120 kHz,  $VBW \geq RBW$ . All readings above 1 GHz are AV and PK values.  $RBW = 1\text{MHz}$  and  $1/T (10\text{Hz})$  for AV value,  $RBW = 1\text{MHz}$  and  $VBW \geq RBW$  for peak value. Measurements were made at 3 meters

### 6.3. Test Arrangement

The arrangement of the equipment is installed to meet the standards and operating in a manner, which tends to maximize its emission characteristics in a normal application. The detailed information refers to test picture.

## 6.4. Test Data

The emissions don't show in following result tables are more than 20dB below the limits.

Bluetooth basic rate and Bluetooth EDR mode were tested, below only shows worst case result of Bluetooth basic rate.

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported.

### 9 kHz-30MHz

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported.

Table 8 Radiated Emission Test Data 9k Hz-30MHz

Frequency (MHz)	Cable Loss +preamp (dB)	Antenna Factor (dB)	Reading (dB $\mu$ V/m)	Level (dB $\mu$ V/m)	Polarity (H/V)	Limit (dB $\mu$ V/m)	Margin (dB)	Note
--	--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--	--

### 30MHz-1GHz

Worst case is shown below for 30MHz-1GHz only.

The emissions don't show in following result tables are more than 20dB below the limits.


Table 9 Radiated Emission Test Data 30MHz-1GHz

Frequency (MHz)	Cable Loss +preamp (dB)	Antenna Factor (dB)	Reading (dB $\mu$ V/m)	Level (dB $\mu$ V/m)	Polarity (H/V)	Limit (dB $\mu$ V/m)	Margin (dB)	Note
30.125	0.6	12.3	17.5	30.4	V	40	9.6	QP
38.021	0.7	12.3	13.8	26.8	V	40	13.2	QP
101.923	1.1	13.2	14.9	29.2	V	43.5	14.3	QP
123.306	1.2	10.5	25.4	37.1	V	43.5	6.4	QP
136.913	1.4	10.5	18.2	30.1	V	43.5	13.4	QP
482.531	2.6	16.1	11.1	29.8	V	46	16.2	QP
119.418	1.3	12.3	14.8	28.4	H	43.5	15.1	QP
123.306	1.2	10.5	16.3	28.0	H	43.5	15.5	QP
189.485	1.6	9.7	10.6	21.9	H	43.5	21.6	QP
295.312	2.0	12.7	8.5	23.2	H	46	22.8	QP
479.298	2.6	15.6	11.9	30.1	H	46	15.9	QP

Remark: Emission level (dB $\mu$ V)=Read Value(dB $\mu$ V/m) + Antenna Factor(dB)+ Cable Loss +preamp(dB)

## Radiated Emission

EUT Name: FX105F  
Operating Condition: Charging and Transmitting  
Test site: SMQ NETC EMC Lab.  
Antenna Position: Vertical & Horizontal  
Test Voltage: AC 120V/60Hz

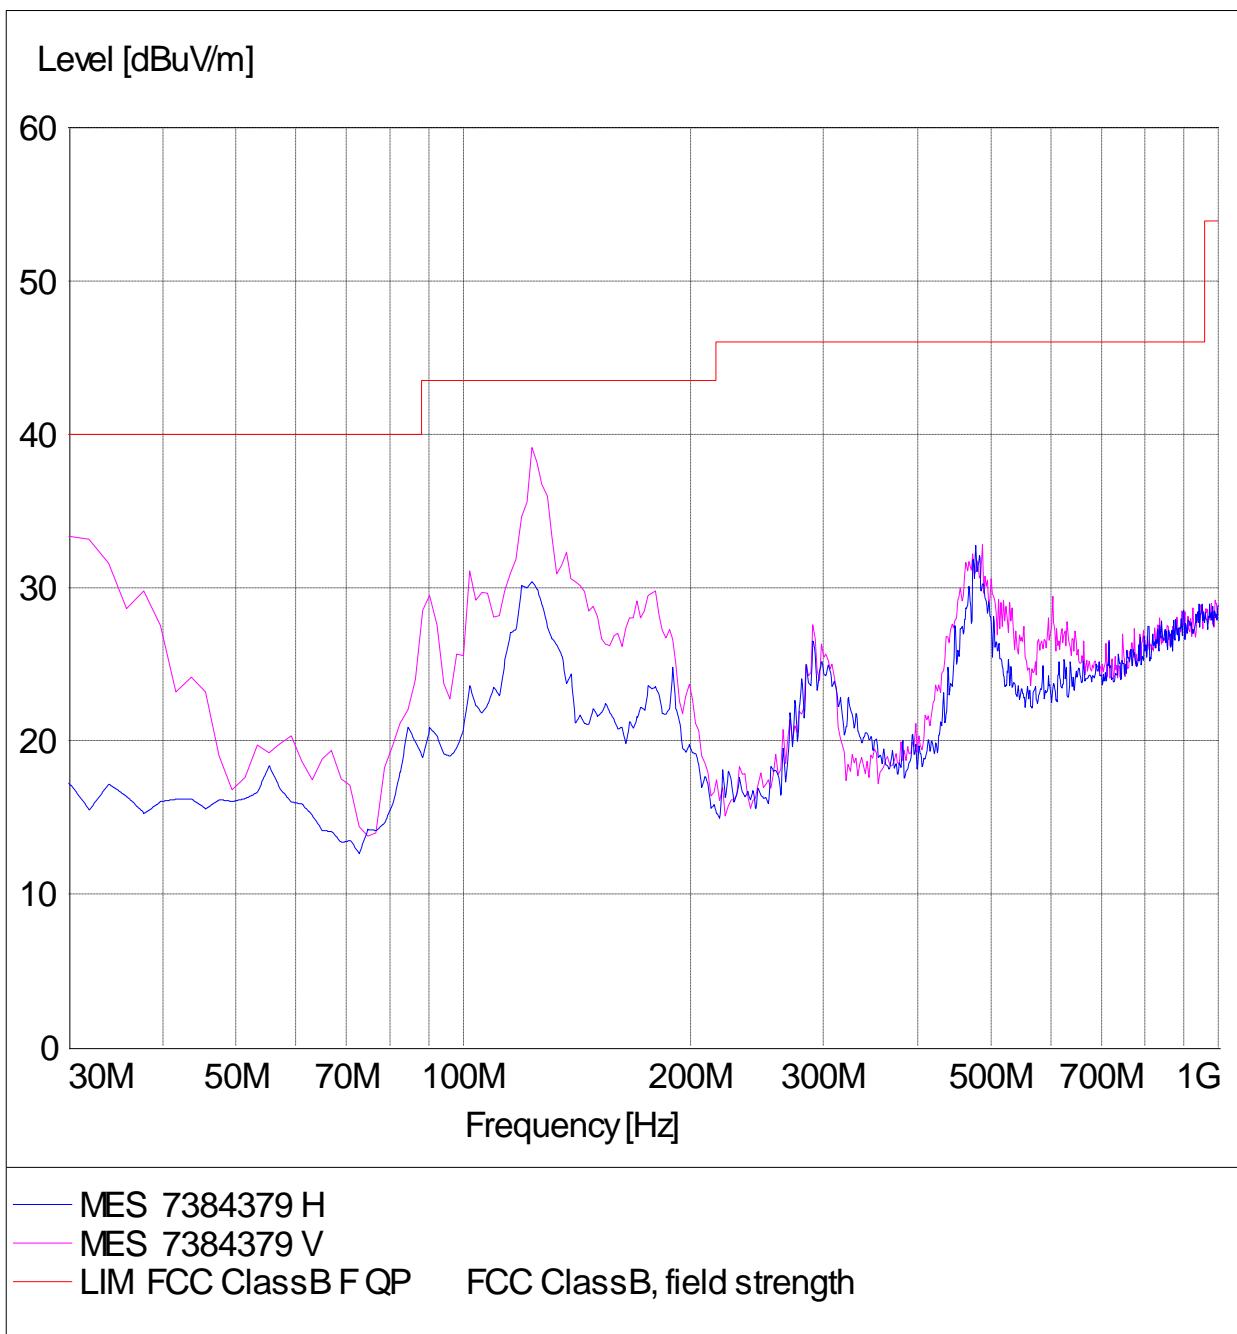

1GHz-18GHz

BDR CH0


## Radiated Emission

### EUT Information

EUT Model Name: FX105F  
Operation mode: BT DH1 CH0 TX  
Test Voltage:  
Comment:

### Common Information

Test Site: SMQ EMC Lab.  
Environment  
Antenna Polarization: Horizontal  
Operator Name:  
Comment:

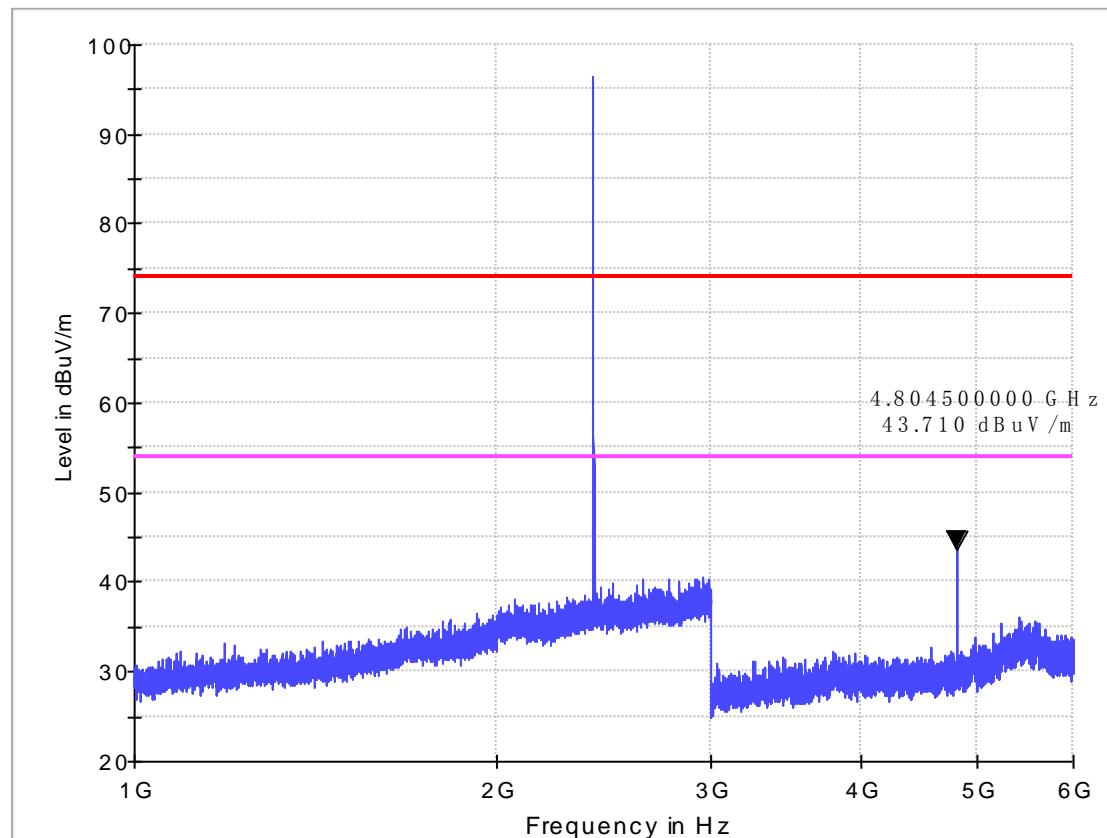


# Radiated Emission

## EUT Information

EUT Model Name: FX105F  
Operation mode: BT DH1 CH0 TX  
Test Voltage:  
Comment:

## Common Information

Test Site: SMQ EMC Lab.  
Environment  
Antenna Polarization: Vertical  
Operator Name:  
Comment:

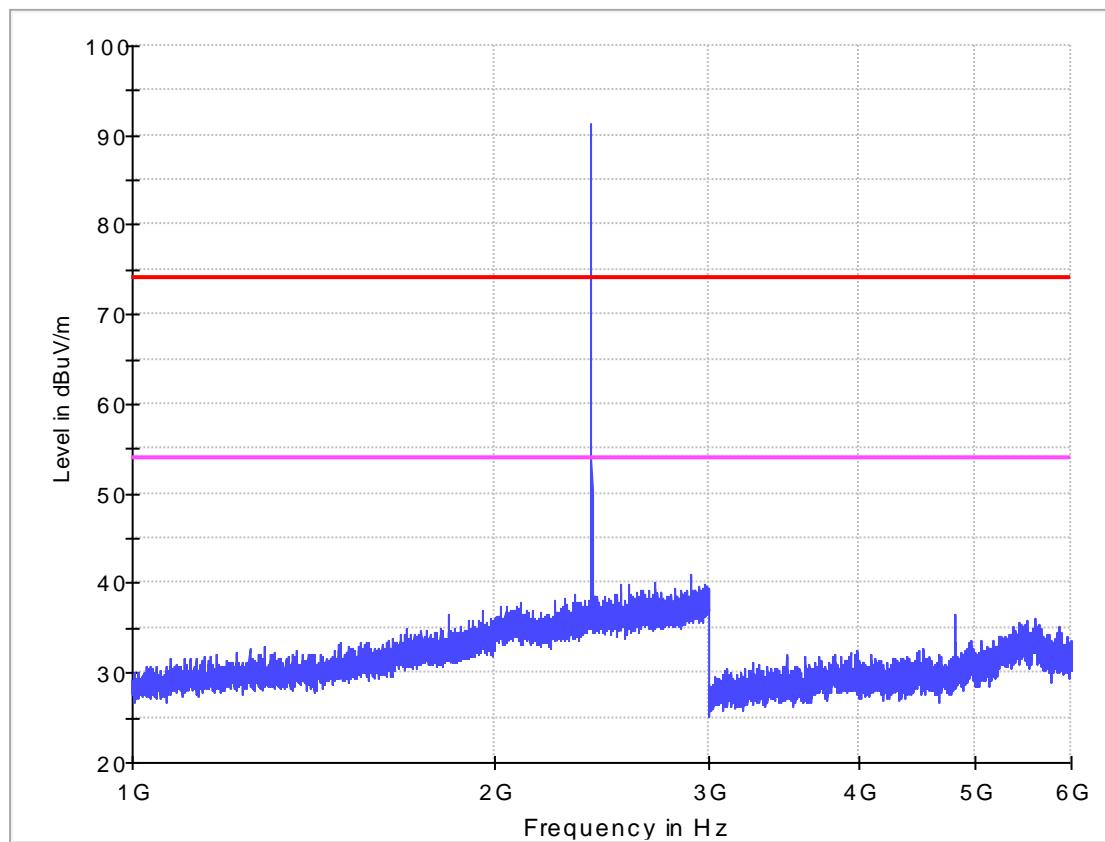

1GHz-18GHz

BDR CH39


## Radiated Emission

### EUT Information

EUT Model Name: FX105F  
Operation mode: BT DH1 CH39 TX  
Test Voltage:  
Comment:

### Common Information

Test Site: SMQ EMC Lab.  
Environment  
Antenna Polarization: Horizontal  
Operator Name:  
Comment:

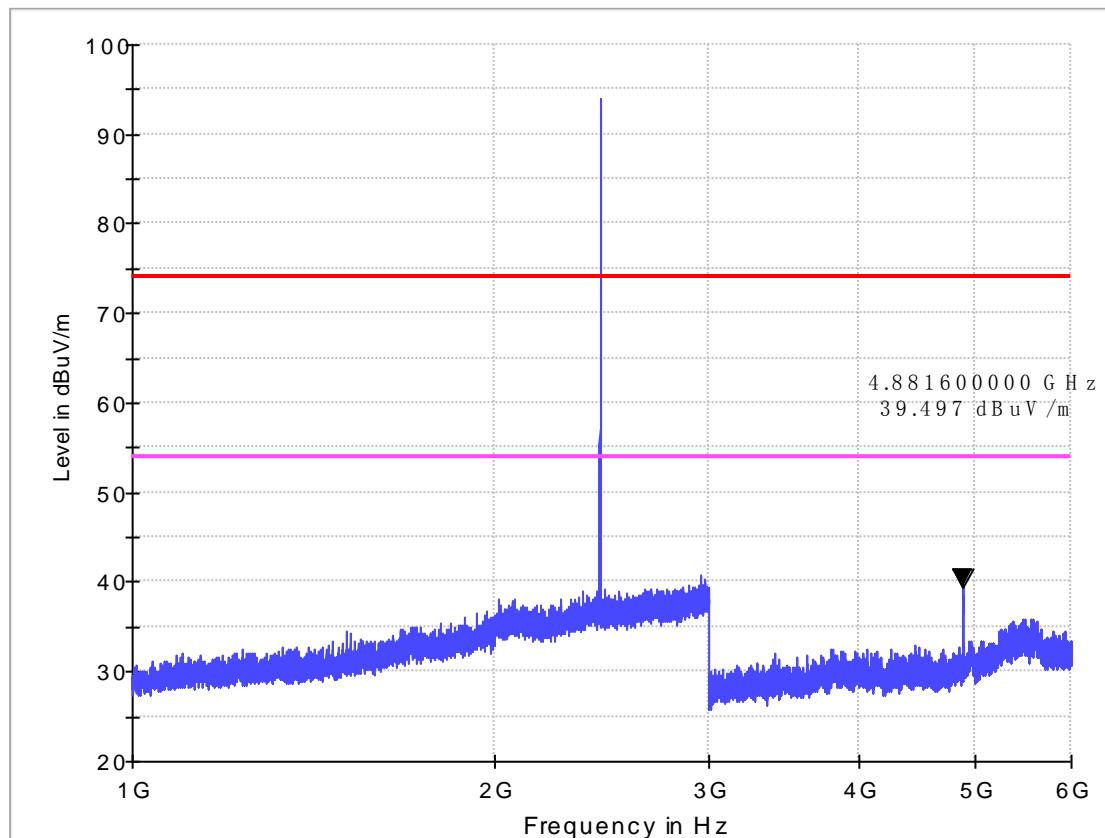


# Radiated Emission

## EUT Information

EUT Model Name: FX105F  
Operation mode: BT DH1 CH39 TX  
Test Voltage:  
Comment:

## Common Information

Test Site: SMQ EMC Lab.  
Environment  
Antenna Polarization: Vertical  
Operator Name:  
Comment:

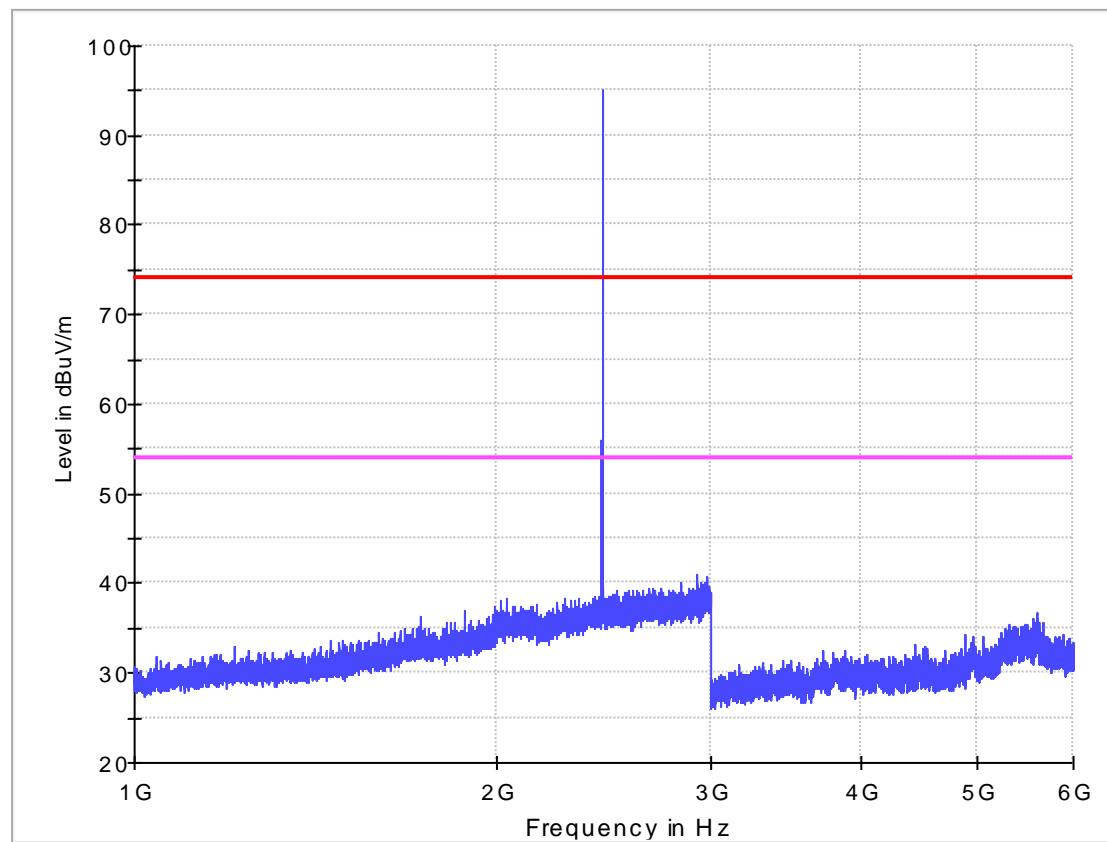

1GHz-18GHz

BDR CH78


## Radiated Emission

### EUT Information

EUT Model Name: FX105F  
Operation mode: BT DH1 CH78 TX  
Test Voltage:  
Comment:

### Common Information

Test Site: SMQ EMC Lab.  
Environment  
Antenna Polarization: Horizontal  
Operator Name:  
Comment:

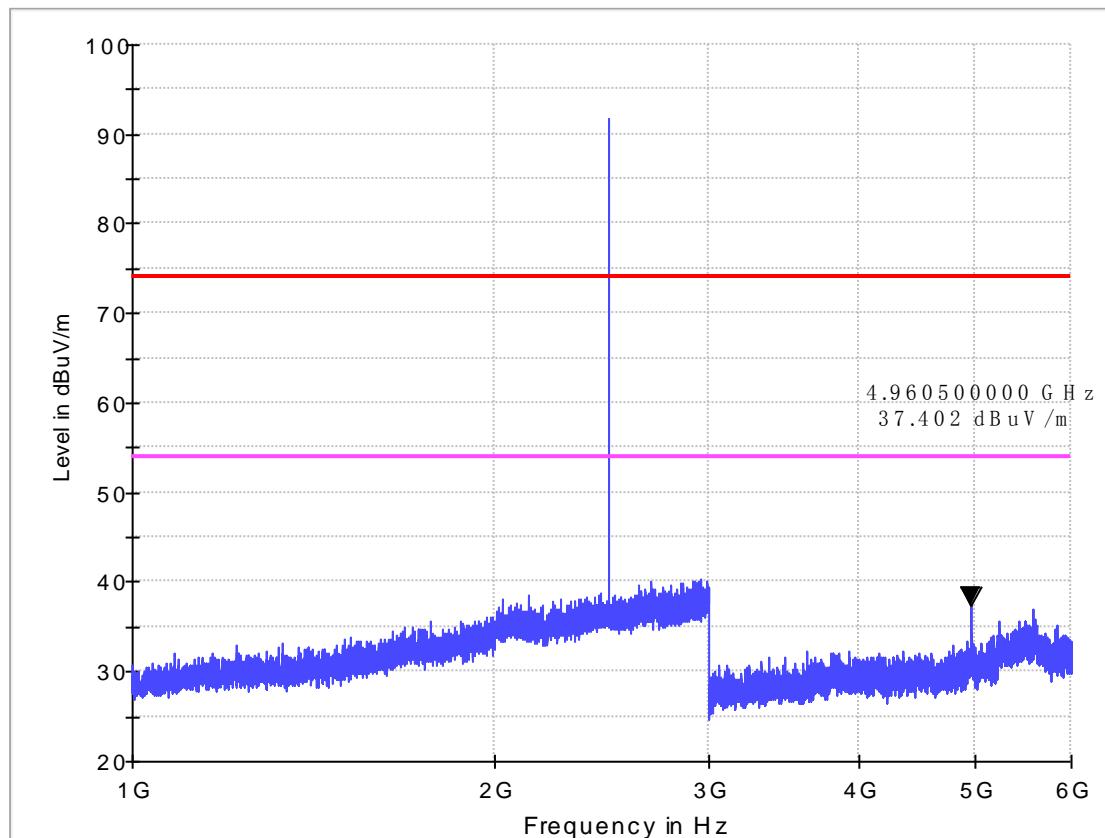


# Radiated Emission

## EUT Information

EUT Model Name: FX105F  
Operation mode: BT DH1 CH78 TX  
Test Voltage:  
Comment:

## Common Information

Test Site: SMQ EMC Lab.  
Environment  
Antenna Polarization: Vertical  
Operator Name:  
Comment:

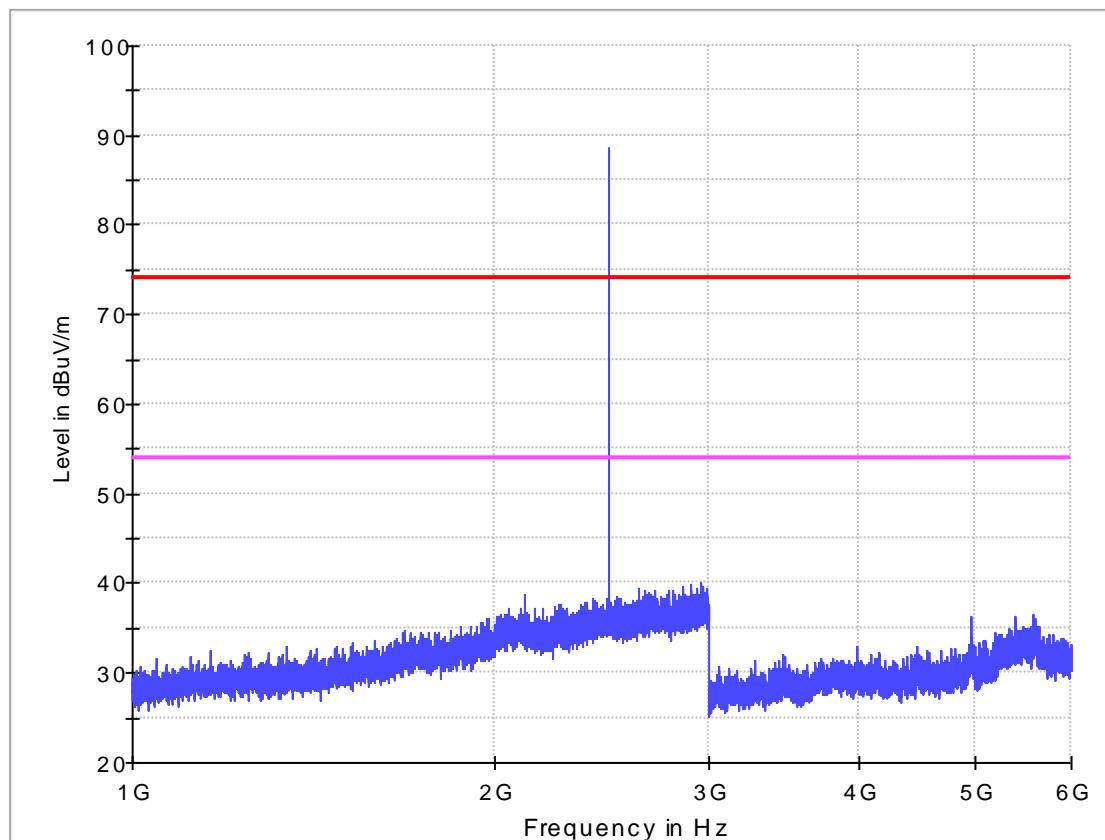

1GHz-18GHz

EDR CH0


## Radiated Emission

### EUT Information

EUT Model Name: FX105F  
Operation mode: BT 3DH1 CH0 TX  
Test Voltage:  
Comment:

### Common Information

Test Site: SMQ EMC Lab.  
Environment  
Antenna Polarization: Horizontal  
Operator Name:  
Comment:

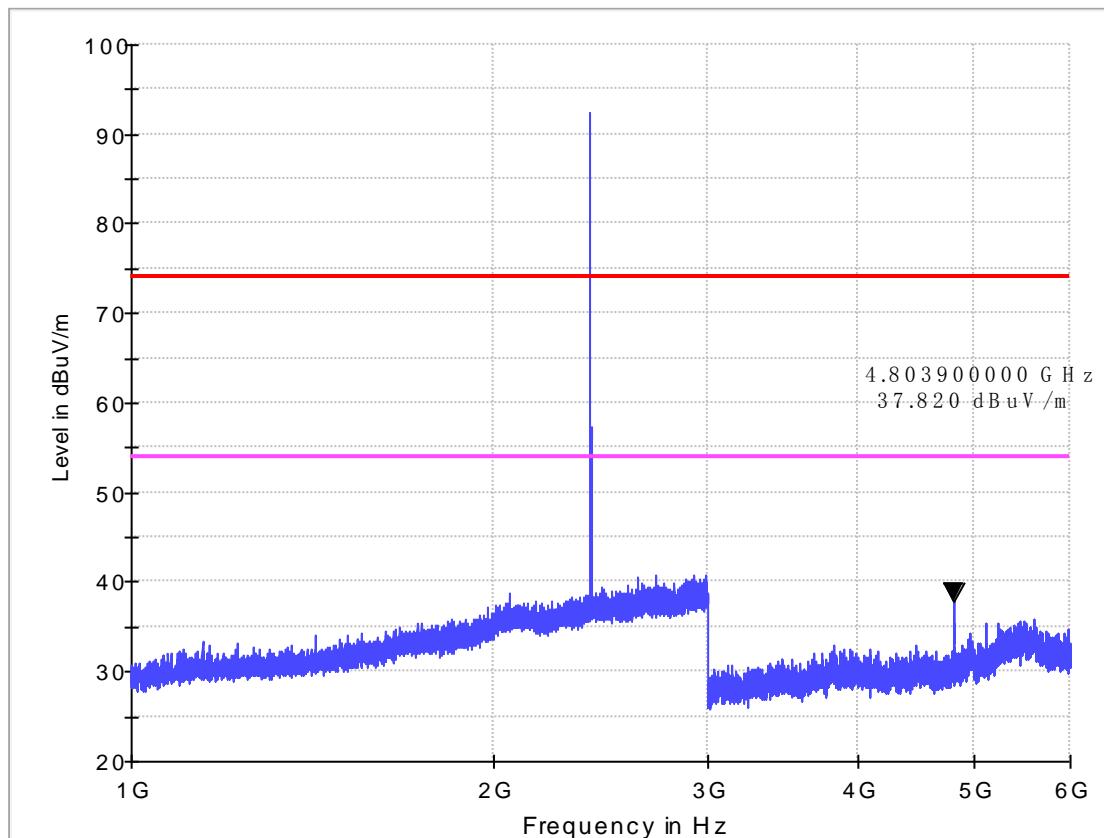


# Radiated Emission

## EUT Information

EUT Model Name: FX105F  
Operation mode: BT 3DH1 CH0 TX  
Test Voltage:  
Comment:

## Common Information

Test Site: SMQ EMC Lab.  
Environment  
Antenna Polarization: Vertical  
Operator Name:  
Comment:

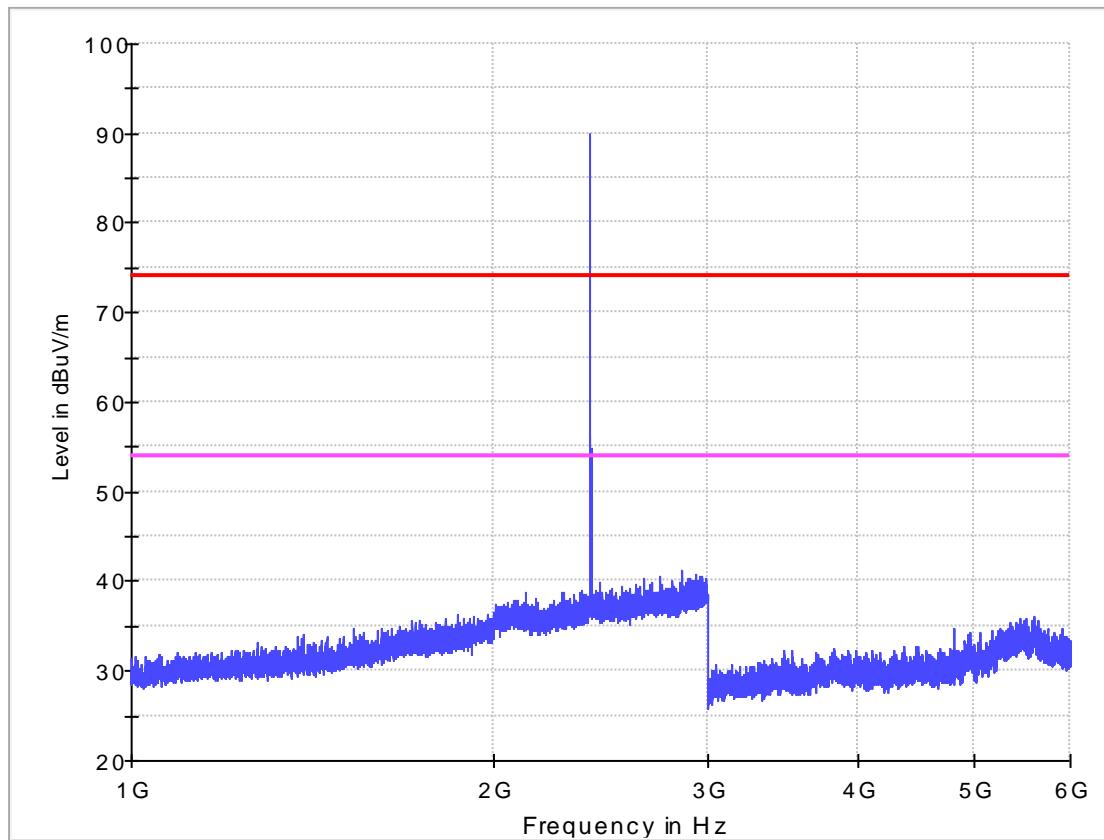

1GHz-18GHz

EDR CH39


## Radiated Emission

### EUT Information

EUT Model Name:	FX105F
Operation mode:	BT 3DH1 CH39 TX
Test Voltage:	
Comment:	

### Common Information

Test Site:	SMQ EMC Lab.
Environment	
Antenna Polarization:	Horizontal
Operator Name:	
Comment:	

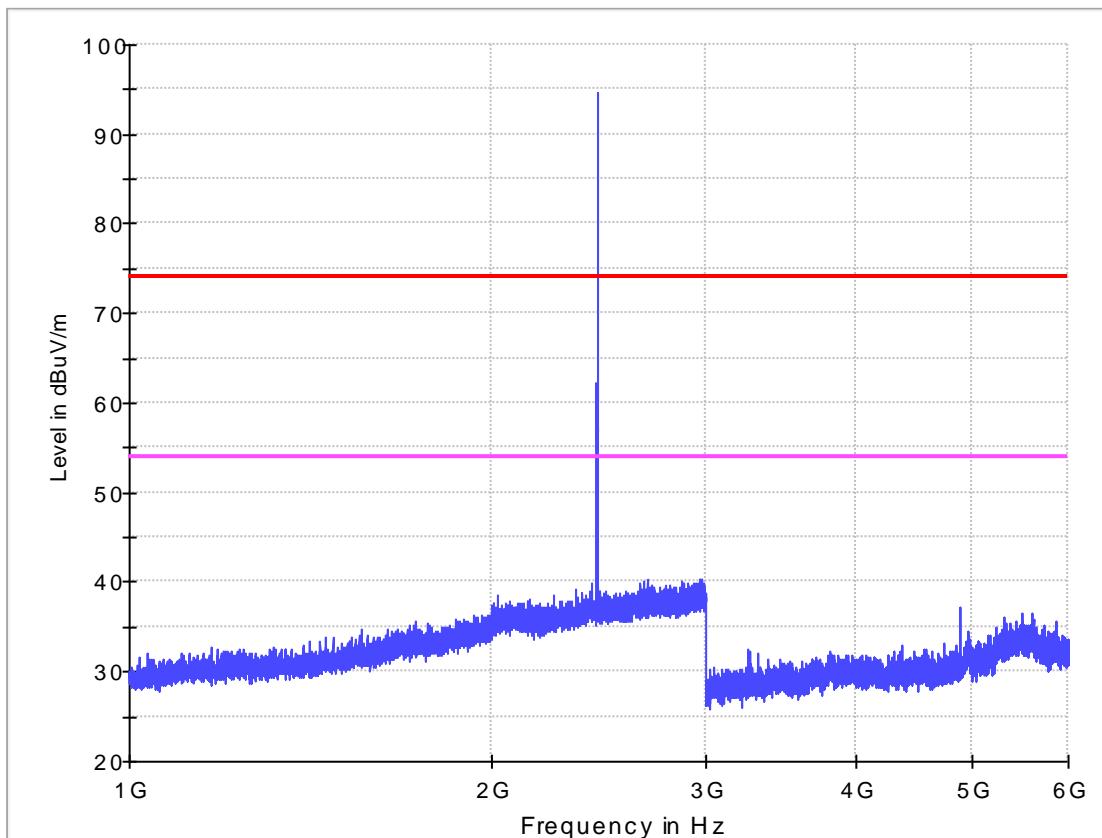


# Radiated Emission

## EUT Information

EUT Model Name: FX105F  
Operation mode: BT 3DH1 CH39 TX  
Test Voltage:  
Comment:

## Common Information

Test Site: SMQ EMC Lab.  
Environment  
Antenna Polarization: Vertical  
Operator Name:  
Comment:

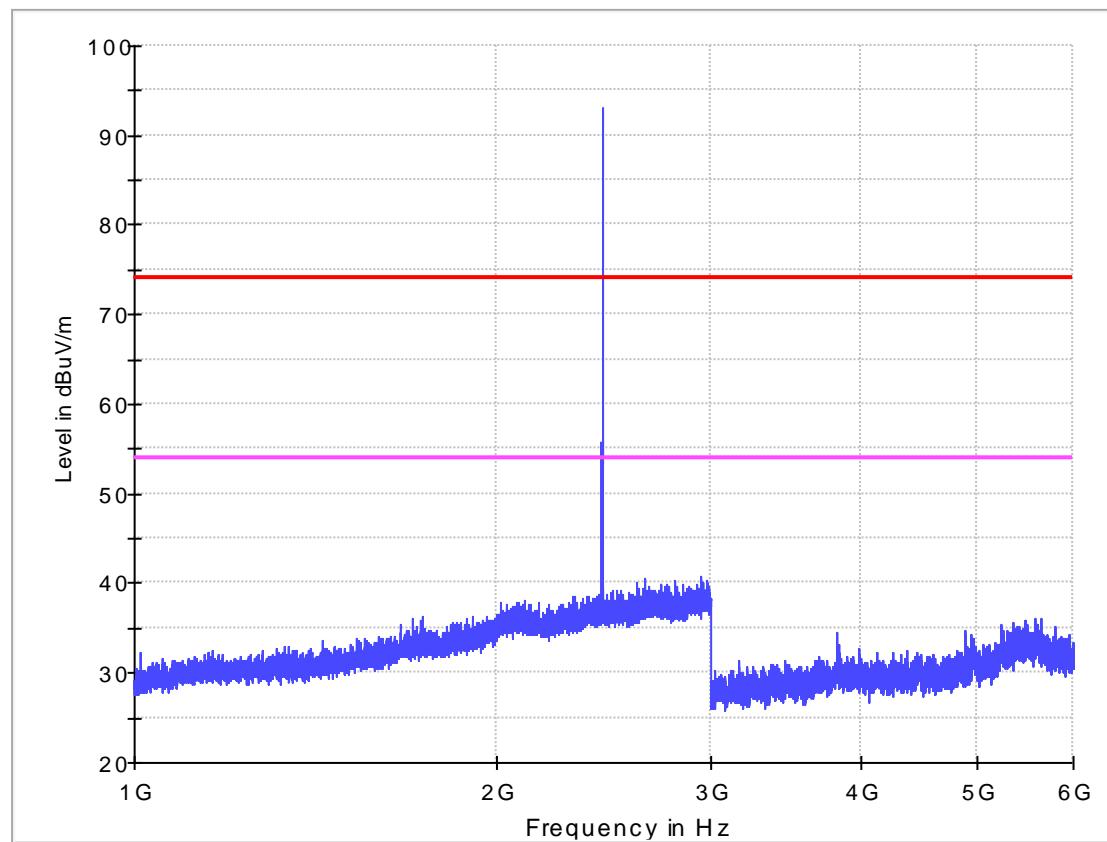

1GHz-18GHz

BDR CH78


## Radiated Emission

### EUT Information

EUT Model Name:	FX105F
Operation mode:	BT 3DH1 CH78 TX
Test Voltage:	
Comment:	

### Common Information

Test Site:	SMQ EMC Lab.
Environment	
Antenna Polarization:	Horizontal
Operator Name:	
Comment:	

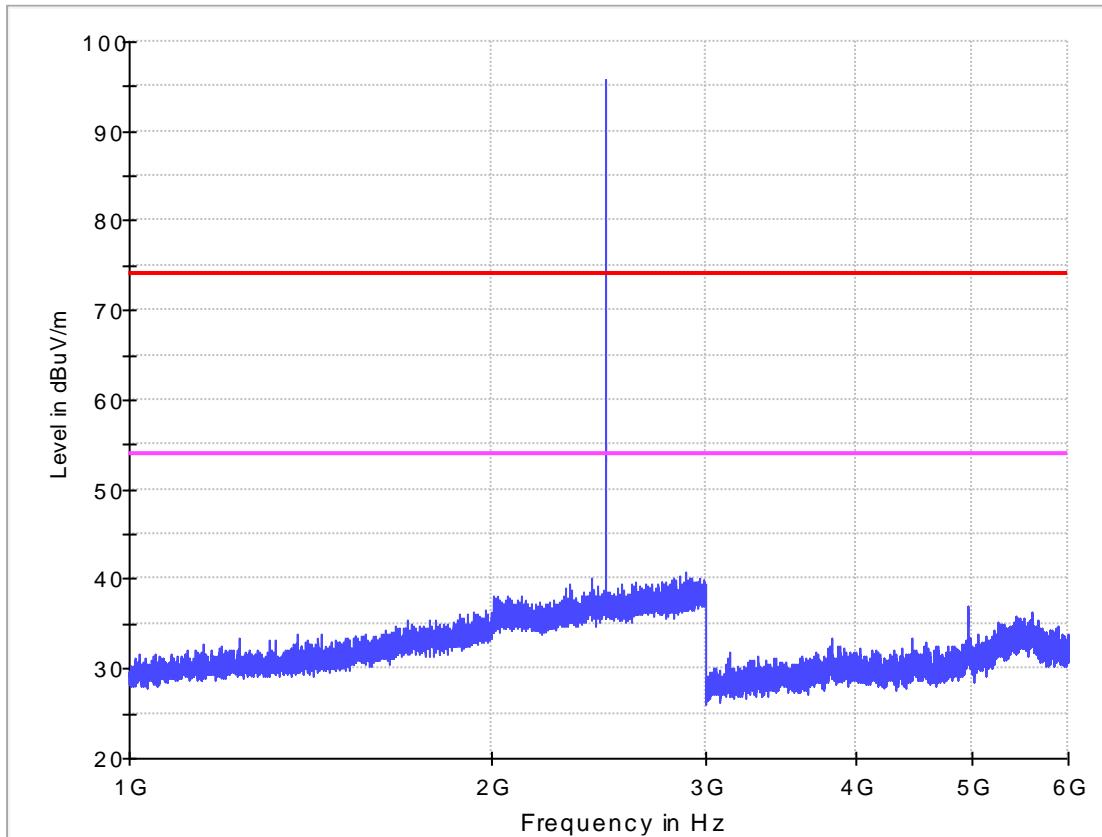


# Radiated Emission

## EUT Information

EUT Model Name: FX105F  
Operation mode: BT 3DH1 CH78 TX  
Test Voltage:  
Comment:

## Common Information

Test Site: SMQ EMC Lab.  
Environment  
Antenna Polarization: Vertical  
Operator Name:  
Comment:

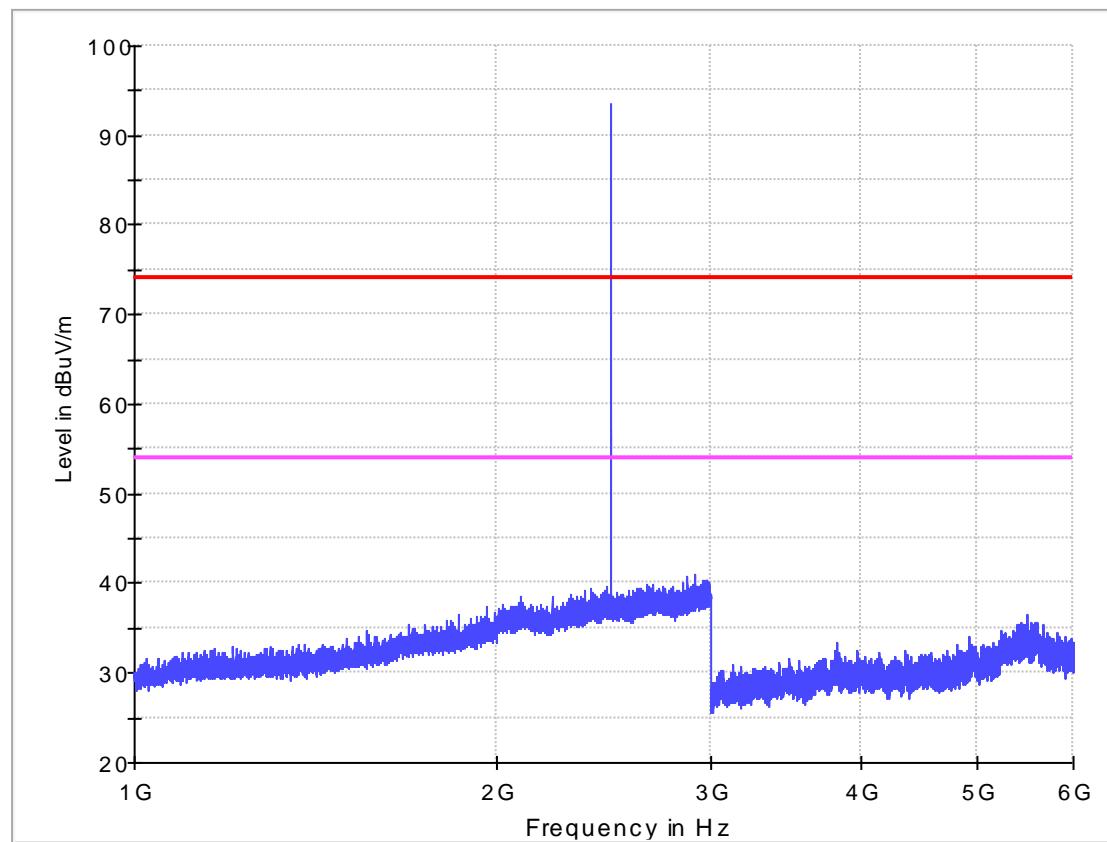

18-26.5GHz

No Peak found in pre-scan, only worst case result is listed in this report.


## Radiated Emission

### EUT Information

EUT Model Name: FX105F  
Operation mode: BT  
Test Voltage:  
Comment:

### Common Information

Test Site: SMQ EMC Lab.  
Environment  
Antenna Polarization: Horizontal  
Operator Name:  
Comment:

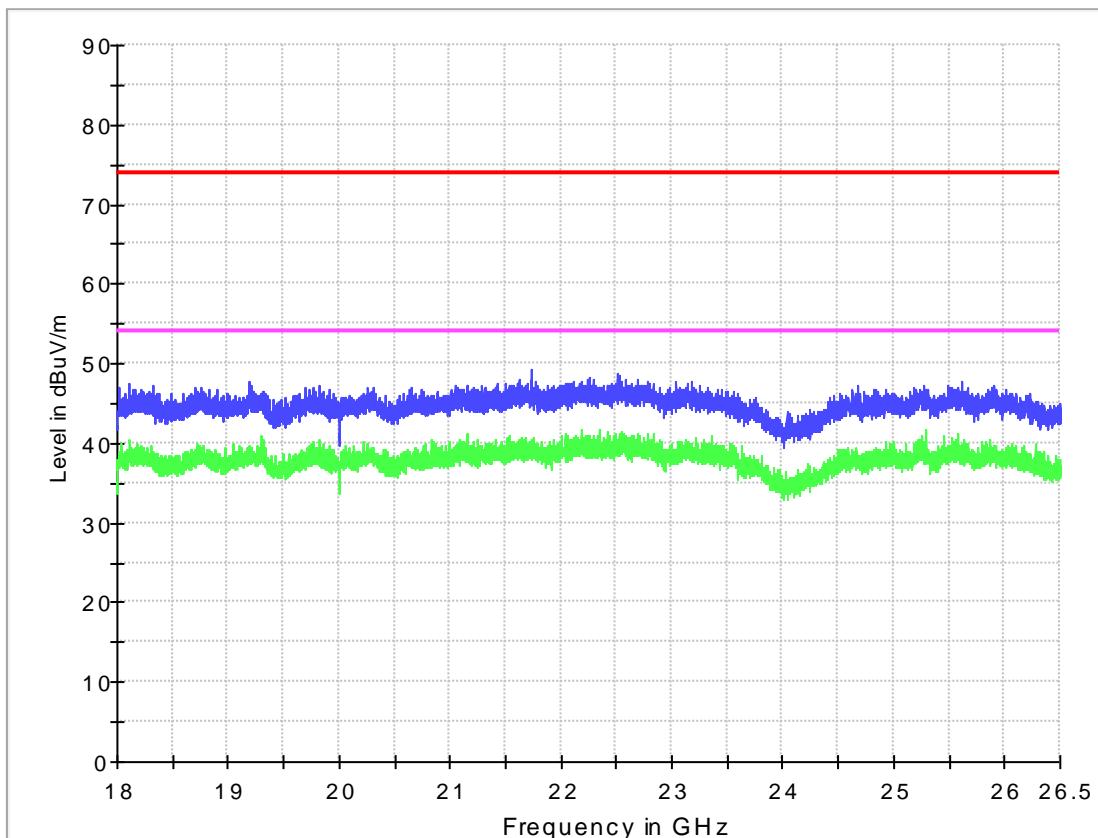

# Radiated Emission

## EUT Information

EUT Model Name: FX105F  
Operation mode: BT  
Test Voltage:  
Comment:

## Common Information

Test Site: SMQ EMC Lab.  
Environment  
Antenna Polarization: Vertical  
Operator Name:  
Comment:

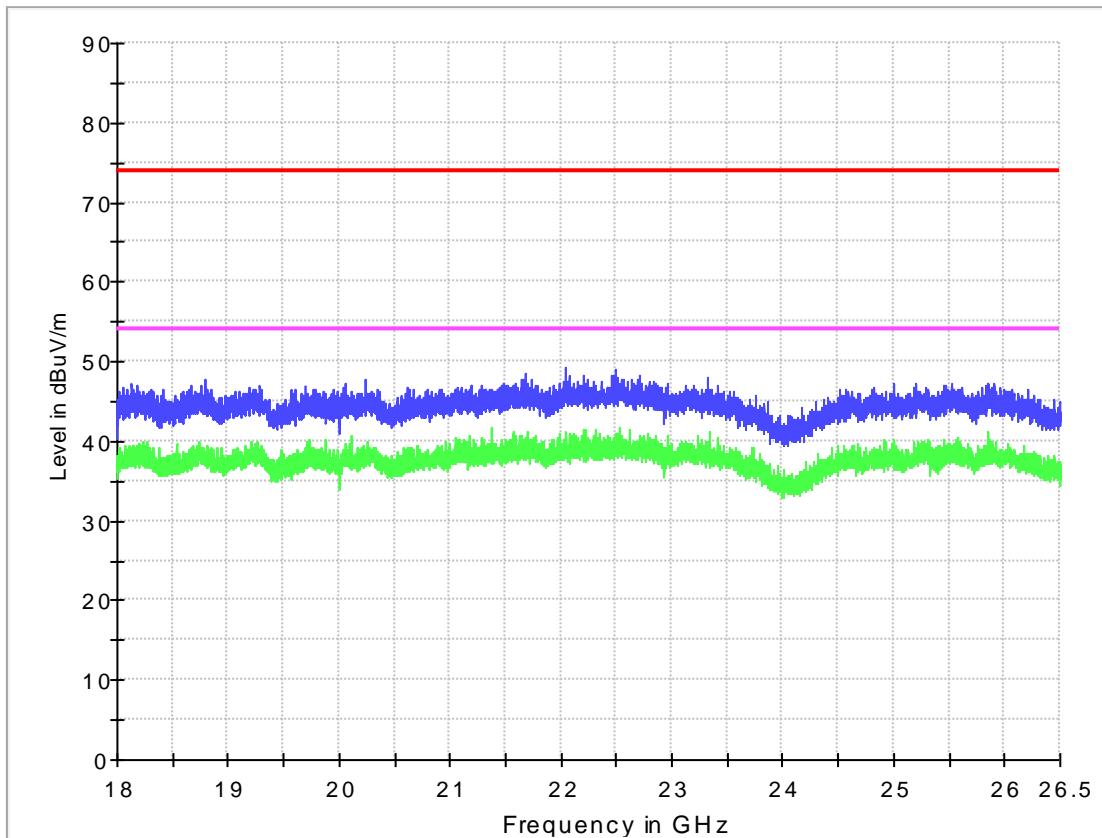


Table 10 Restricted Band Radiated Emission Data

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	
6.31175 - 6.31225	123 - 138	2200 - 2300	
8.291 - 8.294	149.9 - 150.05	2310 - 2390	
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	
8.37625 - 8.38675	156.7 - 156.9	2655 - 2900	
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	
12.29 - 12.293	167.72 - 173.2	3332 - 3339	
12.51975	-	3345.8 - 3358	
12.52025	240 - 285	3600 - 4400	
12.57675	-		
12.57725			
13.36 - 13.41			

Except as shown in table 9 to table 15, all other emission of the above band were less than the limit 20dB.

## 7. 20DB BANDWIDTH MEASUREMENT

### 7.1. LIMITS OF 20dB BANDWIDTH MEASUREMENT

CFR 47 (FCC) part 15.247 (a) (1) and DA 00-705

### 7.2. TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 30kHz RBW and  $VBW \geq RBW$ . The 20dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 20dB.

### 7.3. TEST SETUP



### 7.4. Test Data

Table 11 20dB Bandwidth Test Data Modulation: GFSK

CHANNEL FREQUENCY (MHz)	20dB BANDWIDTH (MHz)	results
2402	1.125	Pass
2441	1.125	Pass
2480	1.125	Pass




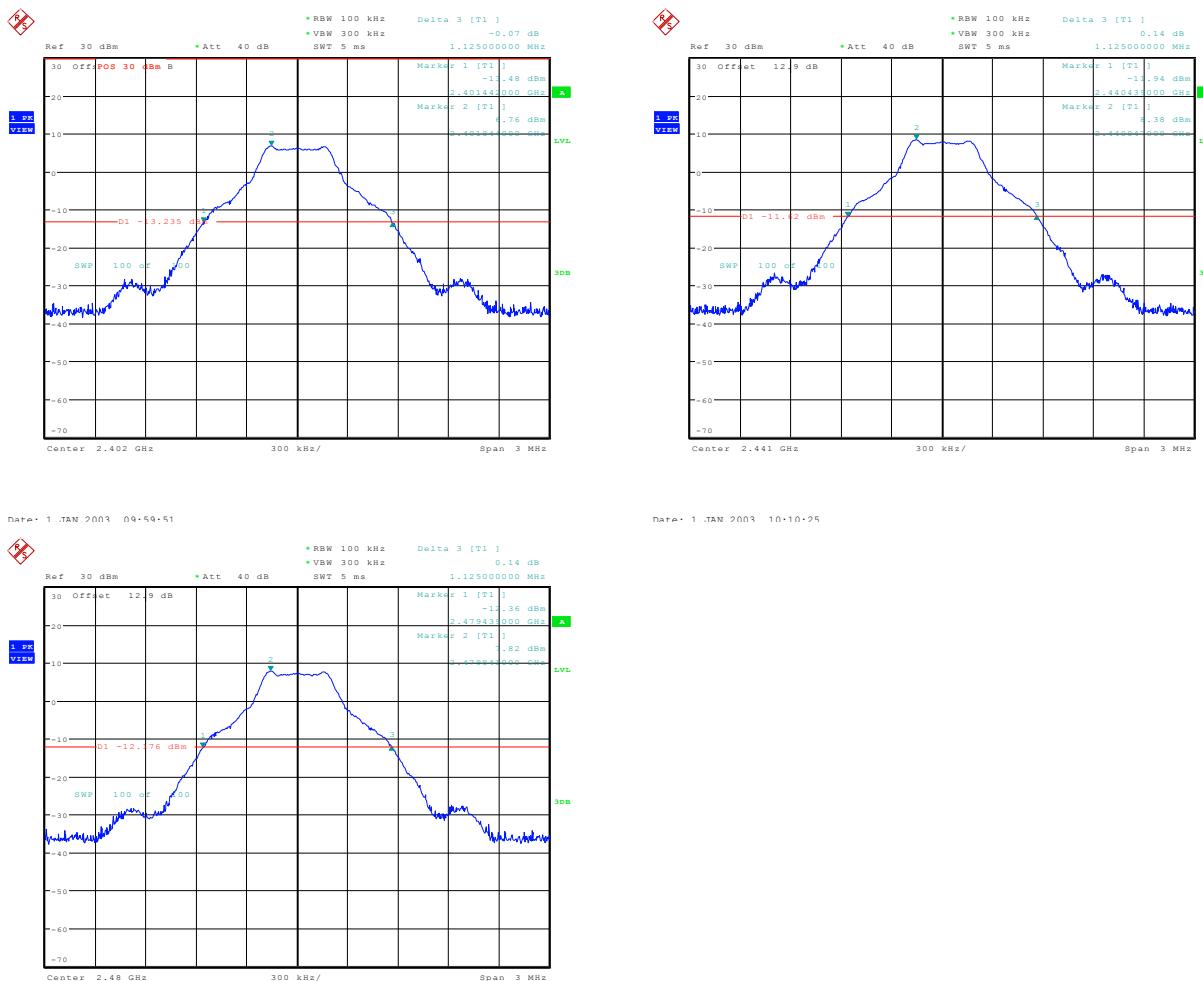


Table 12 20dB Bandwidth Test Data Modulation: 8DPSK

CHANNEL FREQUENCY (MHz)	20dB BANDWIDTH (MHz)	results
2402	1.347	Pass
2441	1.344	Pass
2480	1.347	Pass

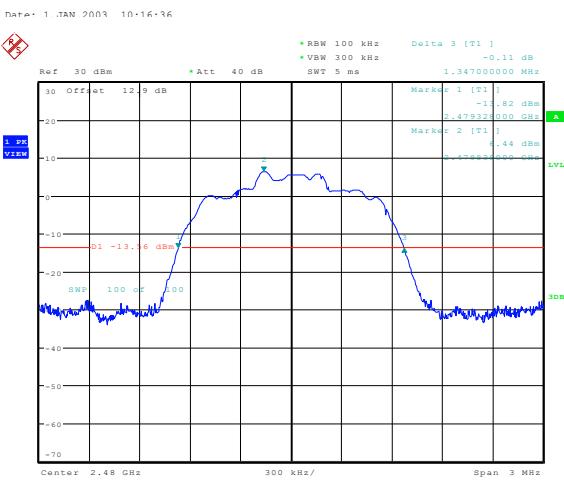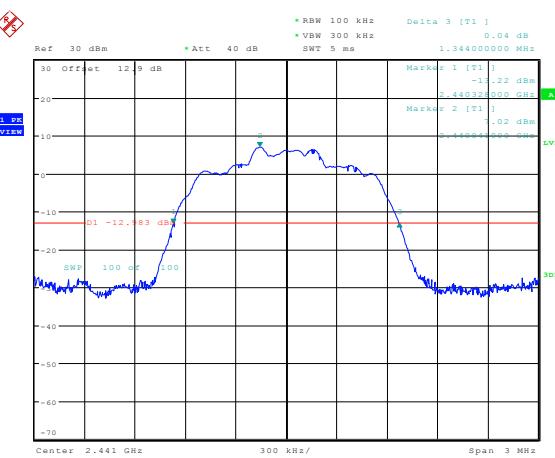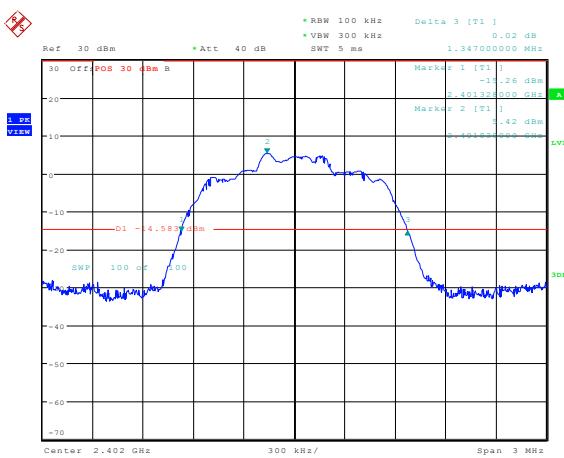

Date: 1.JAN.2003 10:20:54

## 8. CARRIER FREQUENCY SEPARATION MEASUREMENT

### 8.1. LIMITS OF CARRIER FREQUENCY SEPARATION MEASUREMENT

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater.

### 8.2. TEST PROCEDURES

- (a) Connect test port of EUT to spectrum analyzer and universal communication tester.
- (b) Set the EUT to transmit maximum output power at 2.4GHz and switch off frequency hopping function, then set the measured frequency number to two adjacent channels separately and test the carrier frequency separation with spectrum analyzer.

### 8.3. TEST SETUP






### 8.4. Test Data

## BDR

**Table 13 Carrier Frequencies Separation**

Frequency [GHz]	Frequency [GHz]	frequency separation [MHz]	Limit [MHz]	Result
2.402	2.403	1.000	0.625	Pass
2.441	2.442	1.000	0.625	Pass
2.478	2.479	0.990	0.625	Pass

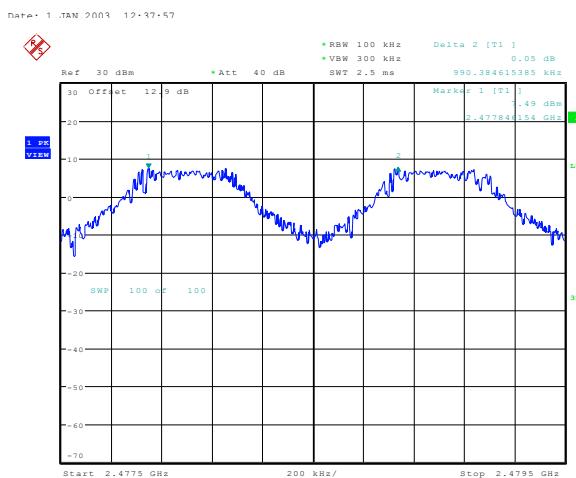
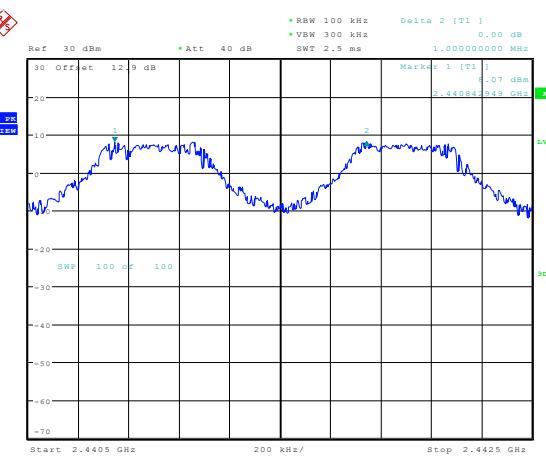
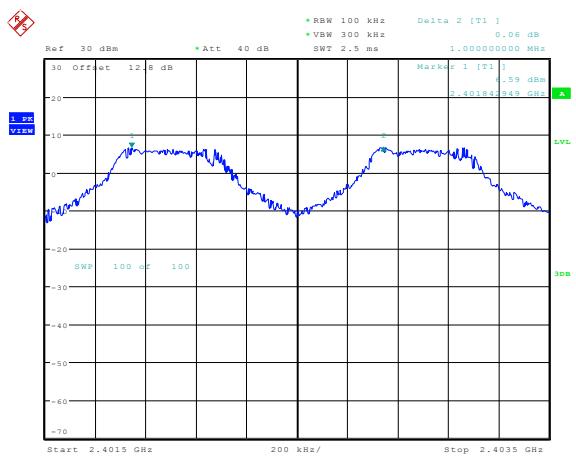


Date: 1.JAN.2003 12:40:40

EDR

Table 14 Carrier Frequencies Separation

Frequency [GHz]	Frequency [GHz]	frequency separation [MHz]	Limit [MHz]	Result
2.402	2.403	1.000	0.845	Pass
2.441	2.442	1.006	0.845	Pass
2.478	2.479	1.006	0.845	Pass

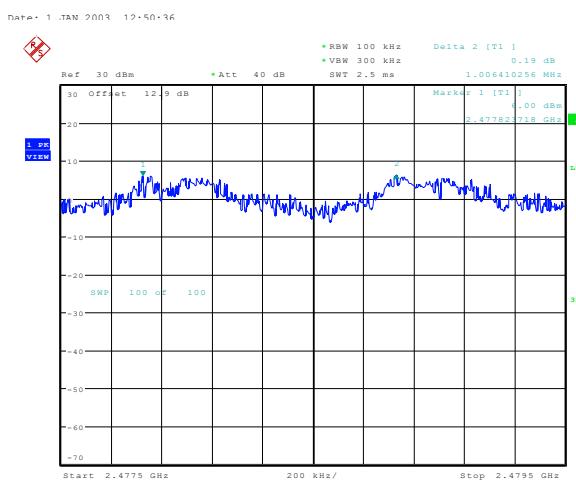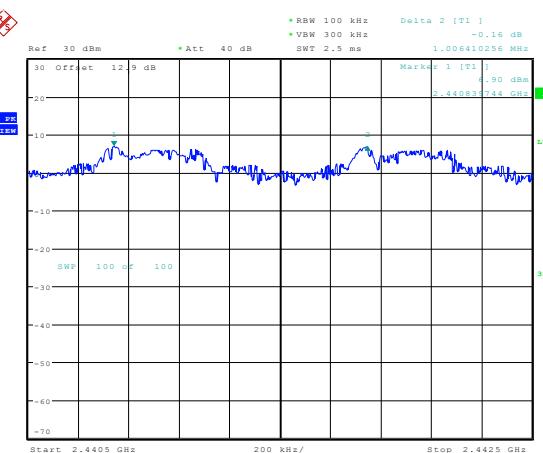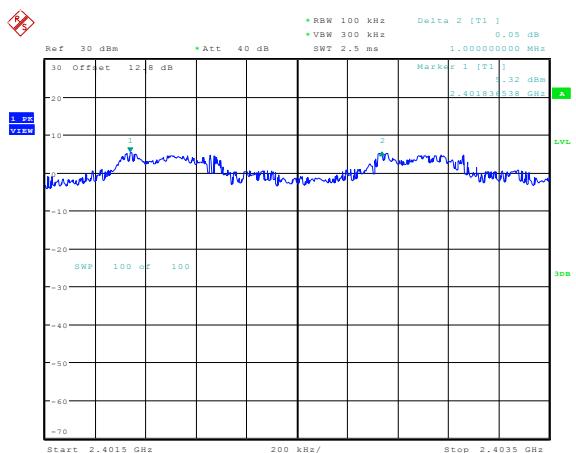

Date: 1.JAN.2003 12:46:50

## 9. NUMBER OF HOPPING CHANNEL

### 9.1. LIMITS OF NUMBER OF HOPPING CHANNEL

Number of hopping channel should be compliance with the requirements in part15.247 (a) (1) III.

### 9.2. TEST PROCEDURE

- (a) Connect test port of EUT to spectrum analyzer
- (b) Set the EUT to transmit maximum output power at 2.4GHz and switch on Frequency hopping function, then set enough count time (larger than 5000 times) to get all the hopping frequency channel displayed on the screen of spectrum analyzer.
- (c) Count the quantity of peaks to get the number of hopping channels.

### 9.3. TEST SETUP




## 9.4. Test Data

Table 15 Hopping Channel Number Test Data


Hopping numbers	LIMIT	results
79	>15	Pass

BDR

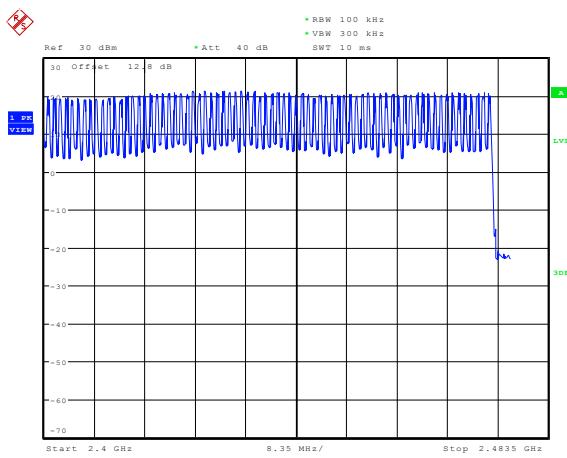

Date: 1.JAN.2003 10:36:56

EDR

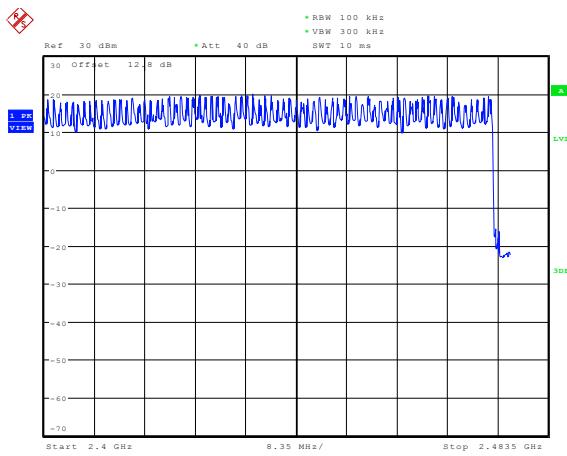

Date: 1.JAN.2003 10:45:09

## 10. TIME OF OCCUPANCY

### 10.1. LIMITS OF TIME OF OCCUPANCY

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

### 10.2. TEST PROCEDURE

- (a) Connect test port of EUT to spectrum analyzer and universal communication tester.
- (b) Set the EUT to transmit maximum output power at 2.4GHz and switch on frequency hopping function.
- (c) Set the span of spectrum analyzer to 0 Hz, and set the resolution bandwidth to 1 MHz and the video bandwidth to 1 MHz, then get the time domain measured diagram. and set sweep time to 2 times of one burst occupancy time, and measure the time of occupancy of one burst.
- (d) Set the resolution bandwidth to 1 MHz and the video bandwidth to 3 MHz ,and set the sweep time to a period (0.4 seconds multiplied by the number of hopping channels employed), and count the number of the bursts.
- (e) Calculate the time of occupancy in a period with time occupancy of a burst and quantity of bursts.

DH1: Dwell time equal to Pluse time (ms)\*(1600/2/79)\*31.6ms

DH3: Dwell time equal to Pluse time (ms)\*(1600/4/79)\*31.6ms

DH5: Dwell time equal to Pluse time (ms)\*(1600/6/79)\*31.6ms

AFH Mode:

DH1: Dwell time equal to Pluse time (ms)\*(800/2/20)\* (0.4\*20) ms

DH3: Dwell time equal to Pluse time (ms)\*(800/4/20)\* (0.4\*20) ms

DH5: Dwell time equal to Pluse time (ms)\*(800/6/20)\* (0.4\*20) ms


## 10.3. TEST RESULTS

### GFSK

Table 16 Time of Occupancy


Data Packet	Time of Single Slot [ms]	Numbers of slots in a period	Time of occupied in a period [s]	AFH Mode Time occupied in a period [s]	Limit [s]	Result
DH1	0.376	37	0.1391	0.0696	$\leq 0.4$	Pass
DH3	1.633	23	0.3756	0.1878	$\leq 0.4$	Pass
DH5	2.880	12	0.3456	0.1728	$\leq 0.4$	Pass

### DH1

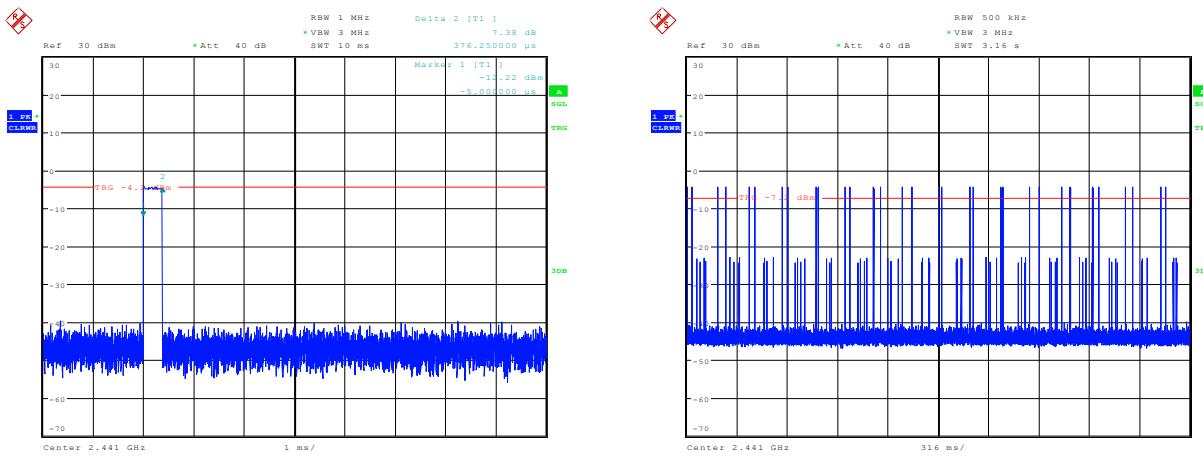

Date: 1.JAN.2003 12:40:58


### DH3

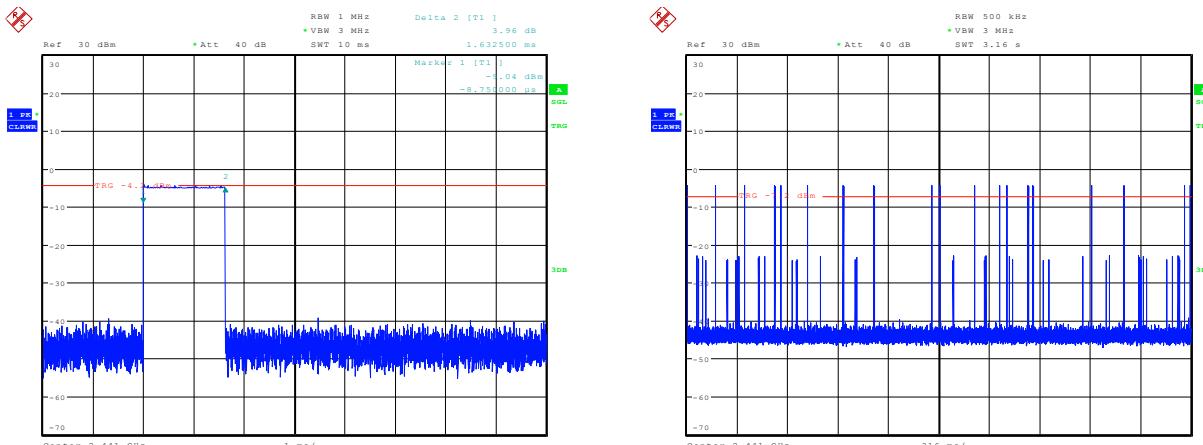

Date: 1.JAN.2003 12:56:15

Date: 1.JAN.2003 12:56:21

## DH5

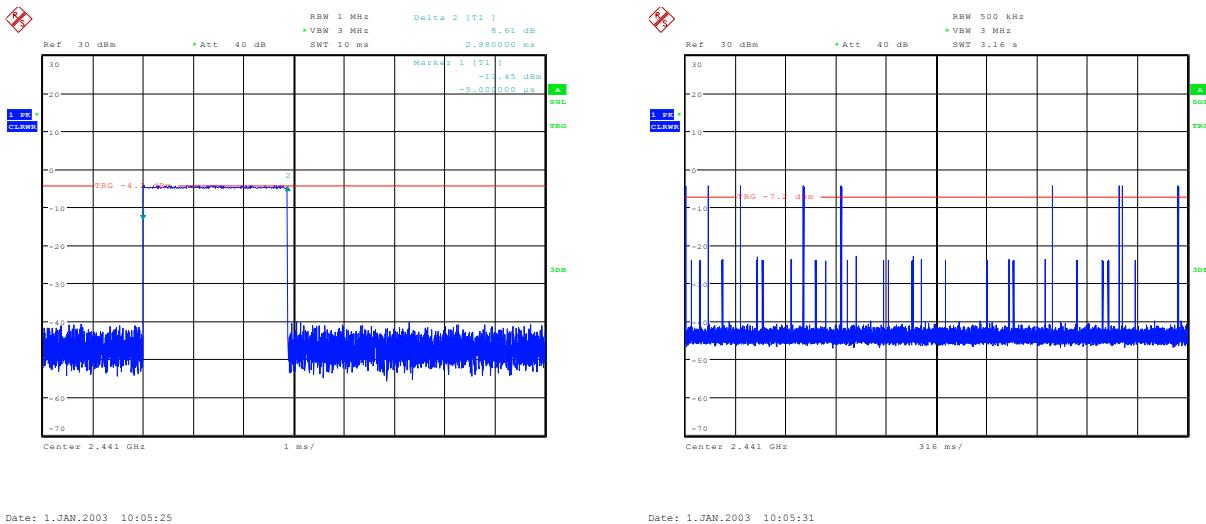


## 8DPSK

Table 17 Time of Occupancy


Data Packet	Time of Single Slot [ms]	Numbers of slots in a period	Time of occupied in a period [s]	AFH Mode Time occupied in a period [s]	Limit [s]	Result
3-DH1	0.384	32	0.1229	0.0615	$\leq 0.4$	Pass
3-DH3	1.635	23	0.3761	0.1881	$\leq 0.4$	Pass
3-DH5	2.886	10	0.2886	0.1443	$\leq 0.4$	Pass

## 3-DH1

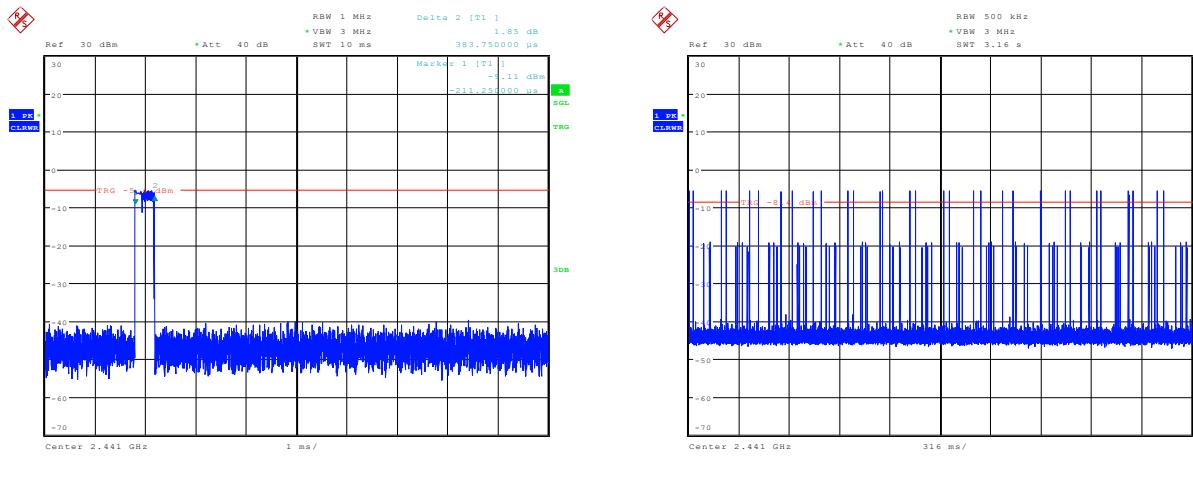

Date: 1.JAN.2003 12:47:44


## 3-DH3

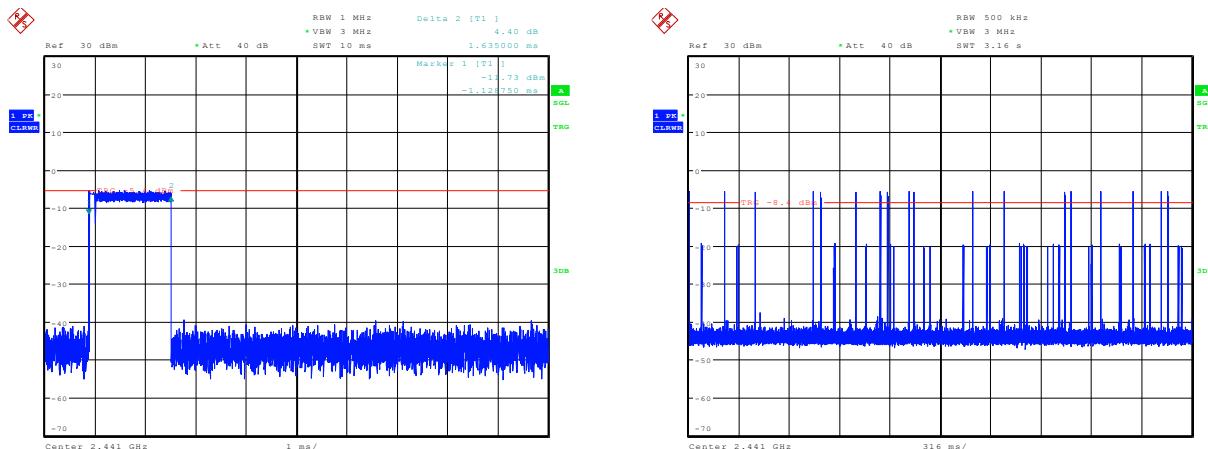

Date: 1.JAN.2003 12:54:10

Date: 1.JAN.2003 12:54:16

### 3-DH5

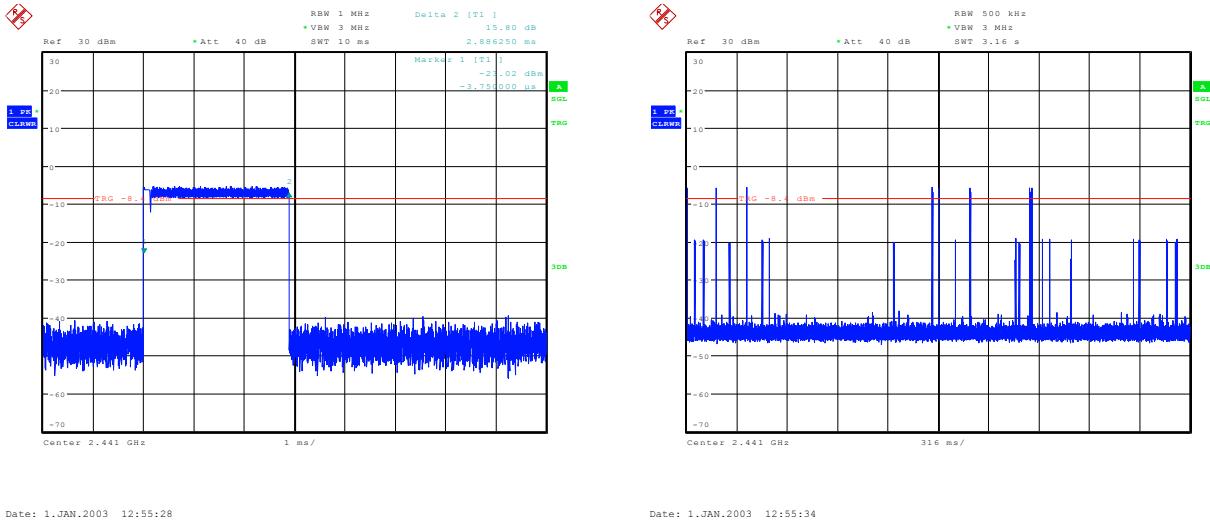

Date: 1.JAN.2003 12:55:28

Date: 1.JAN.2003 12:55:34

## 11. PEAK POWER

### 11.1. LIMITS OF Peak Power

Compliance with part 15.247 (b) (1)& RSS-247 Clause 5.4(2), for frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt.

For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watt.

### 11.2. TEST PROCEDURE




- (a) Connect test port of EUT to universal communication tester.
- (b) Set the EUT to transmit maximum output power at 2.4GHz and switch off frequency hopping function.
- (c) Then set the EUT to transmit at high, middle and low frequency and measure the conducted output power separately.

### 11.3. TEST RESULTS

## BDR

Table 18 Peak Power Test Data




Channel	Channel No.	Center Freq. [MHz]	Meas. Level (Cond.) [dBm]	Limit [dBm]	Result
Bottom	0	2402	7.65	< 21	Pass
Middle	39	2441	9.20	< 21	Pass
Top	78	2480	8.66	< 21	Pass

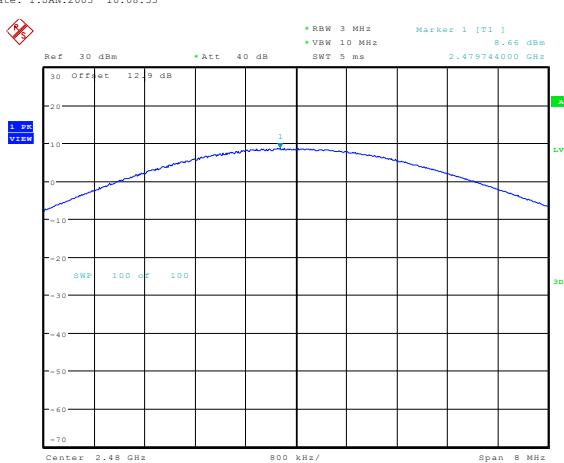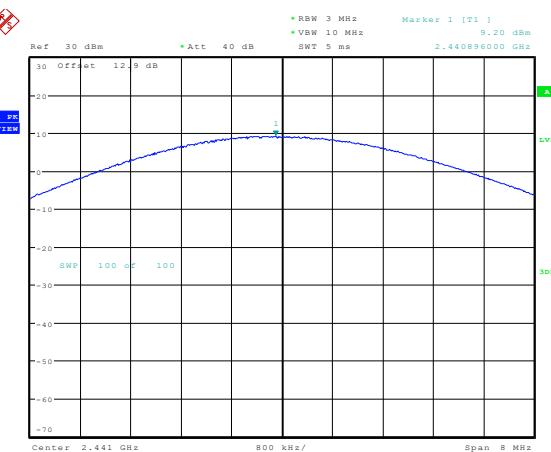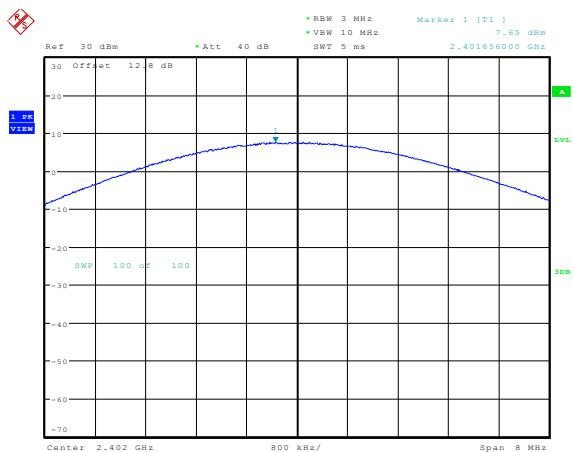

## EDR

Table 19 Peak Power Test Data

Channel	Channel No.	Center Freq. [MHz]	Meas. Level (Cond.) [dBm]	Limit [dBm]	Result
Bottom	0	2402	6.67	< 21	Pass
Middle	39	2441	8.18	< 21	Pass
Top	78	2480	7.69	< 21	Pass

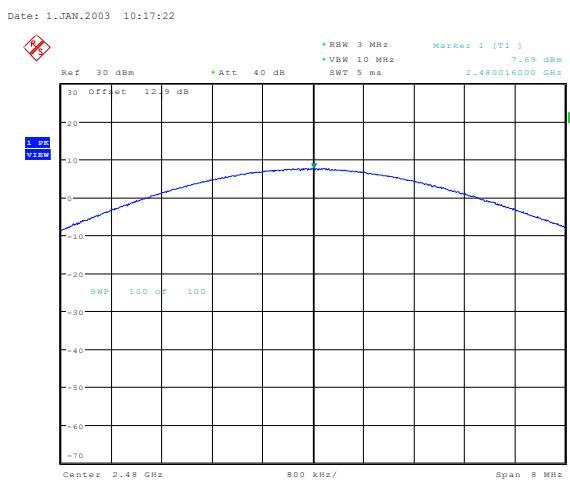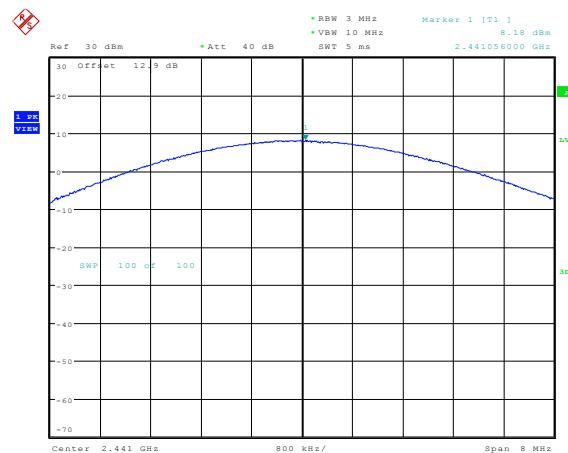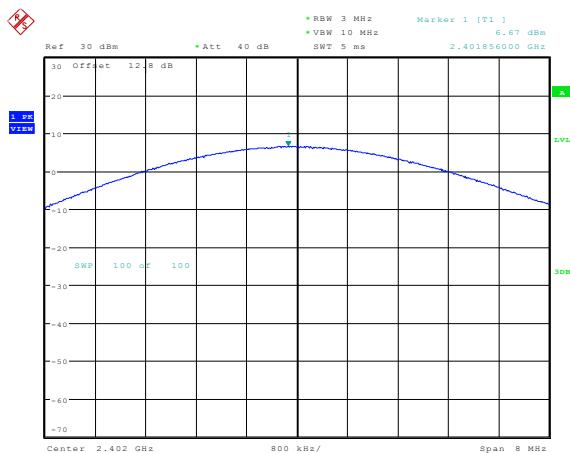

Date: 1.JAN.2003 10:19:36

Date: 1.JAN.2003 10:21:38

## 12. BAND EDGES MEASUREMENT

### 12.1. Limits of Band Edges Measurement

Below –20dB of the highest emission level of operating band (in 100kHz resolution bandwidth).

### 12.2. TEST PROCEDURE

1. The EUT is placed on a turntable, which is 1.5m above the ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emission.
4. Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission:
  - (a) PEAK: RBW=VBW=1MHz / Sweep=AUTO
  - (b) AVERAGE: RBW=1MHz / VBW=10Hz / Sweep=AUTO
5. Repeat the procedures until all the PEAK and AVERAGE versus POLARIZATION are measured.



### 12.3. Test Results

The measured plots are attached on the following. Test data shows compliance with the band edge requirement in part 15.247(d).



## Bluetooth Basic Rate

Low edge

Horizontal

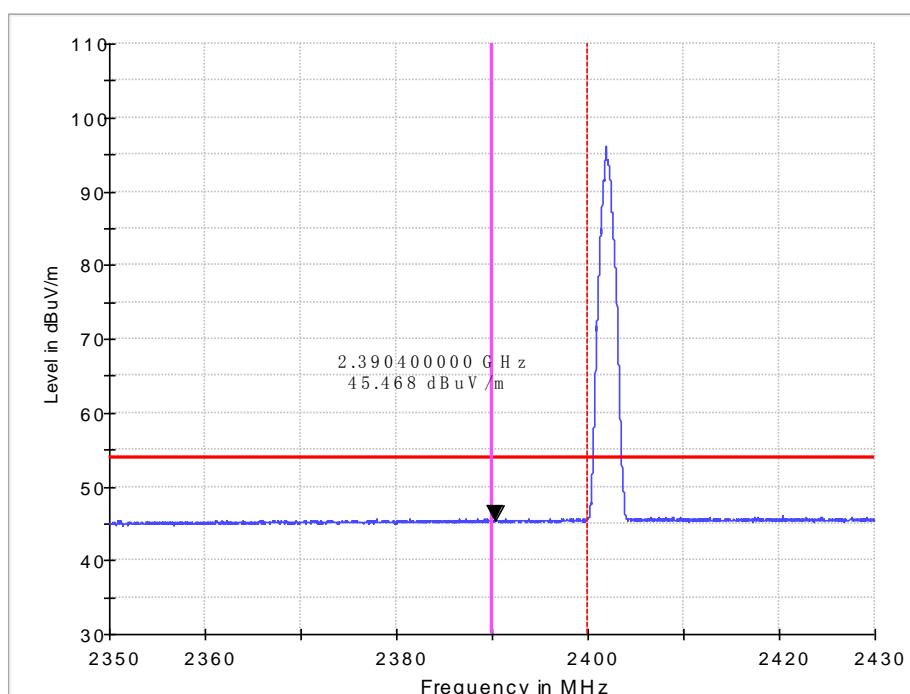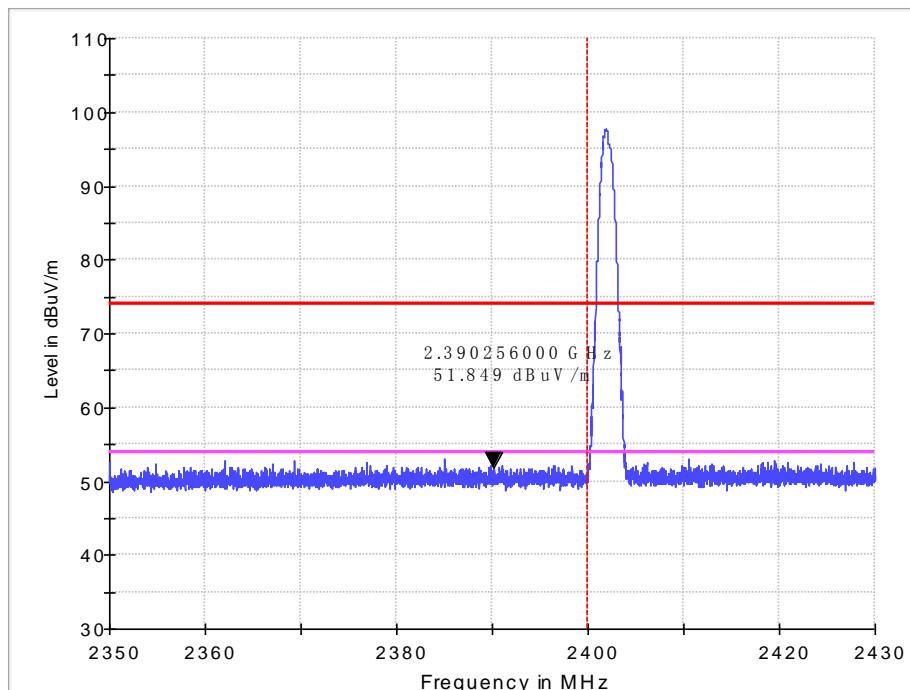



## Vertical

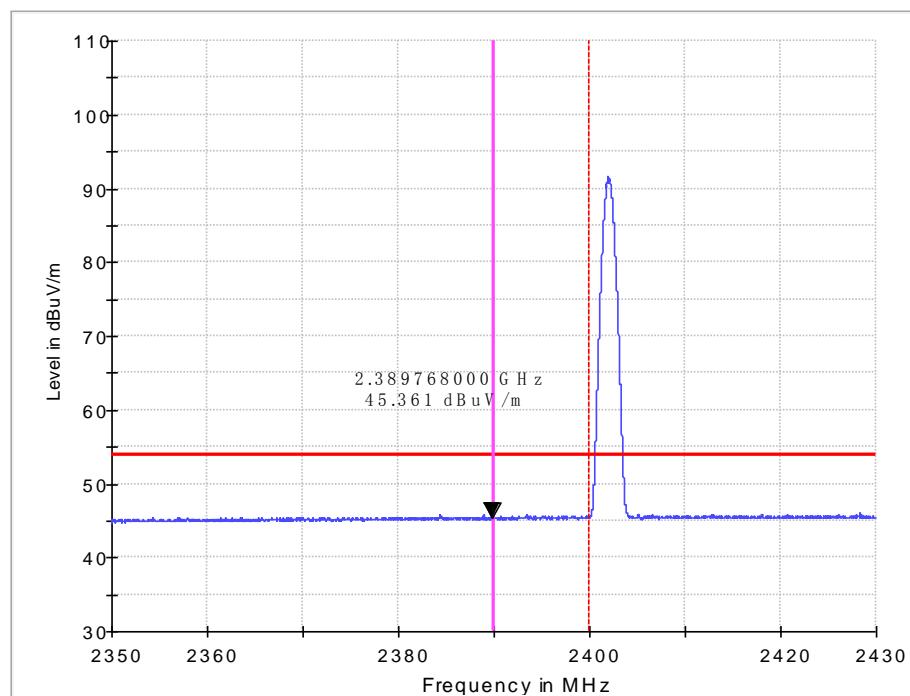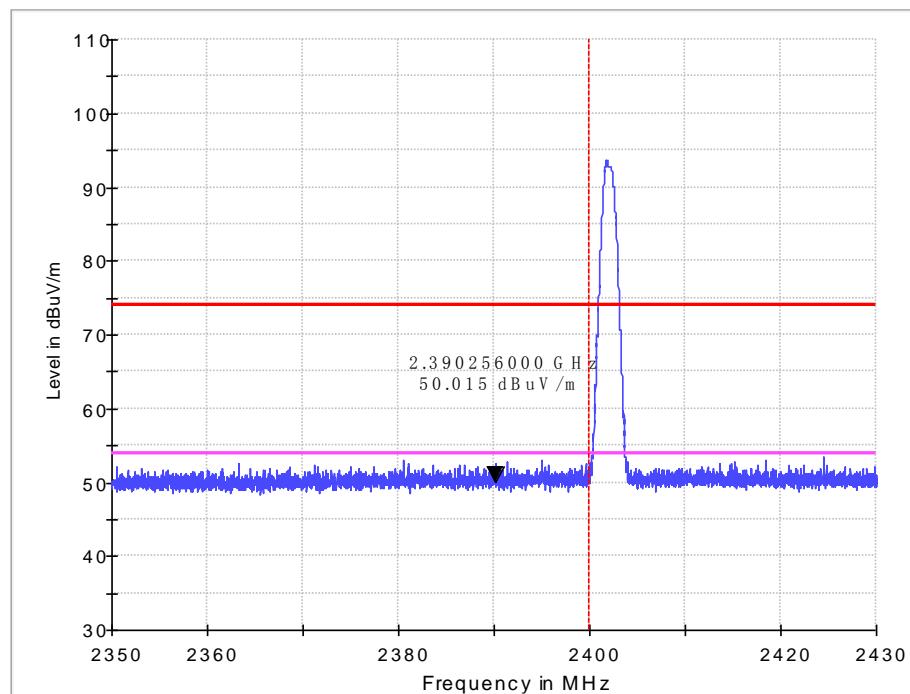



## Bluetooth Basic Rate

### Upper Edge

#### Horizontal

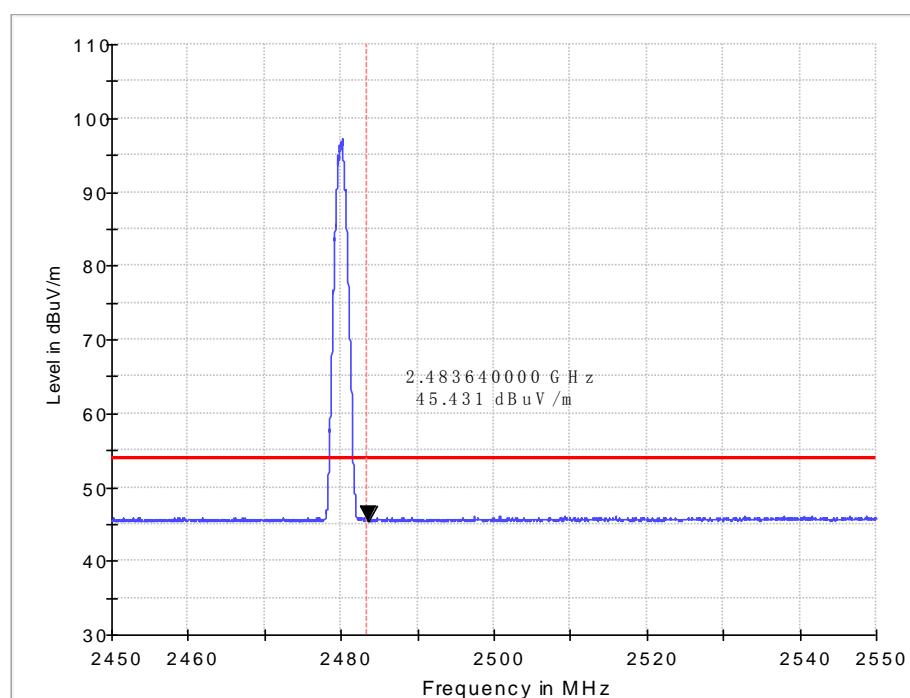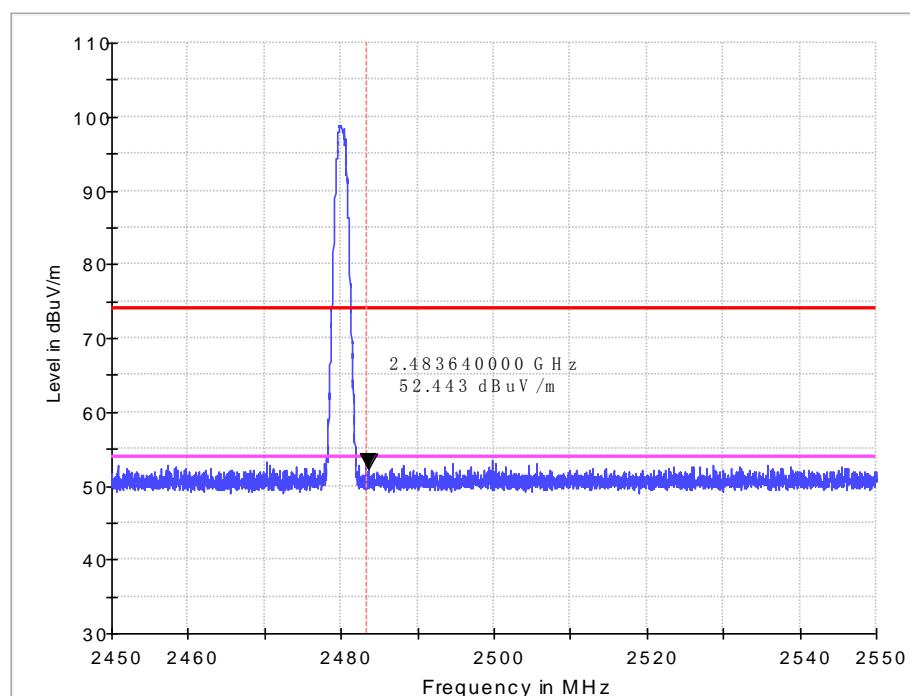



## Vertical

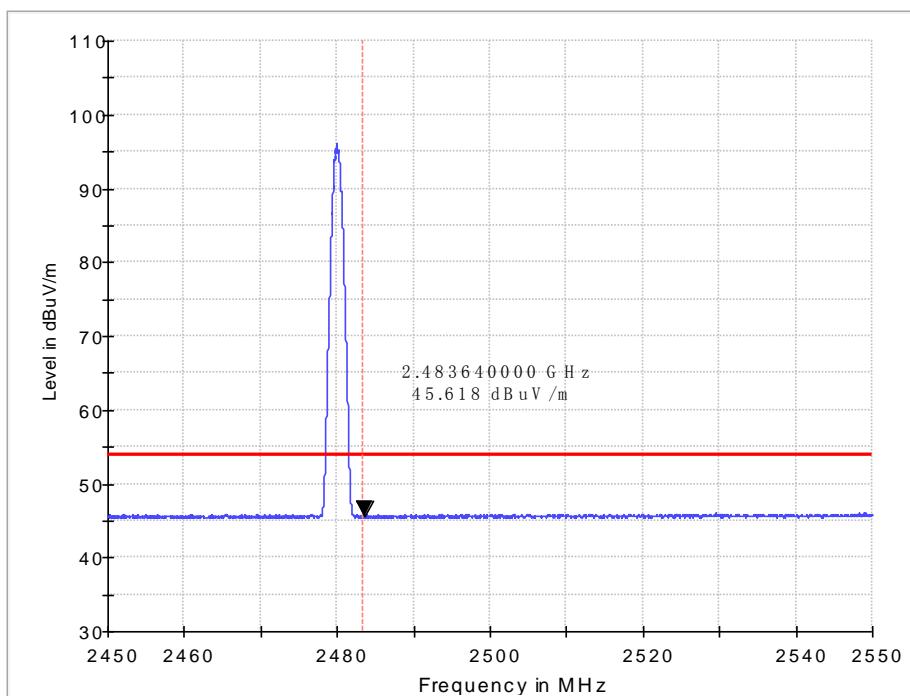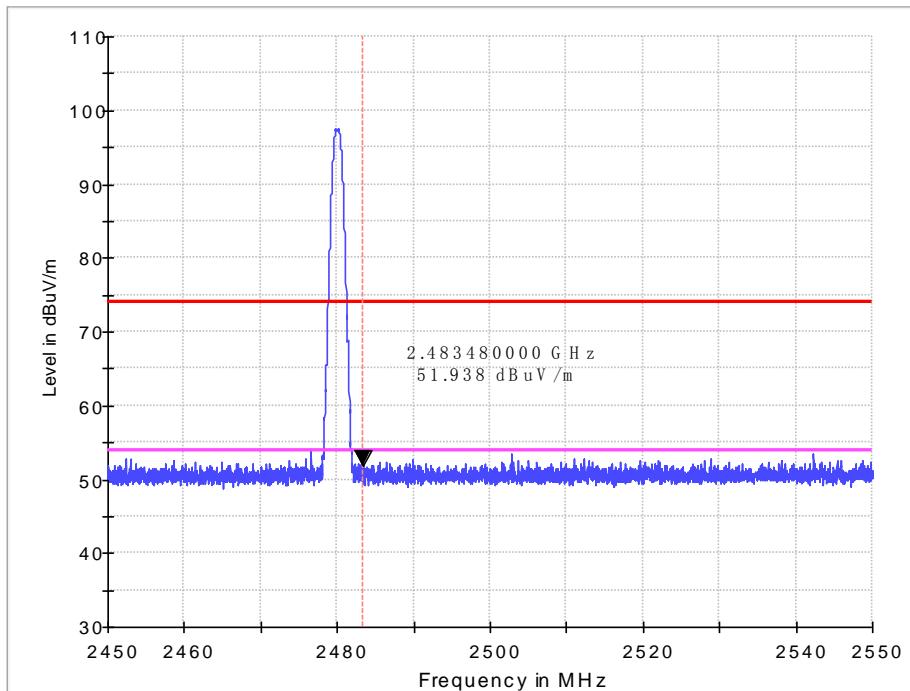



## Bluetooth EDR

Low edge

Horizontal

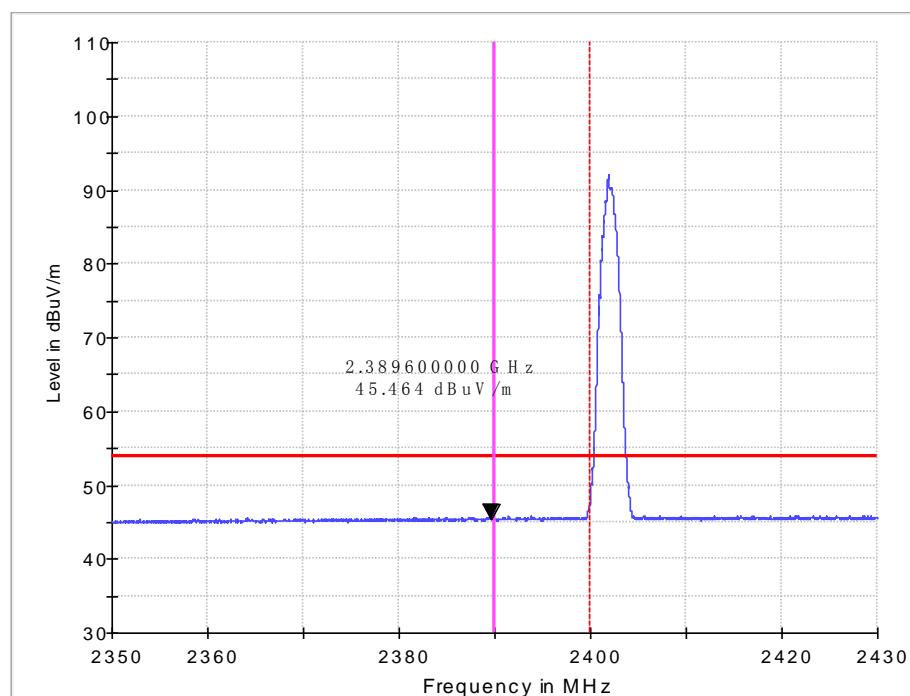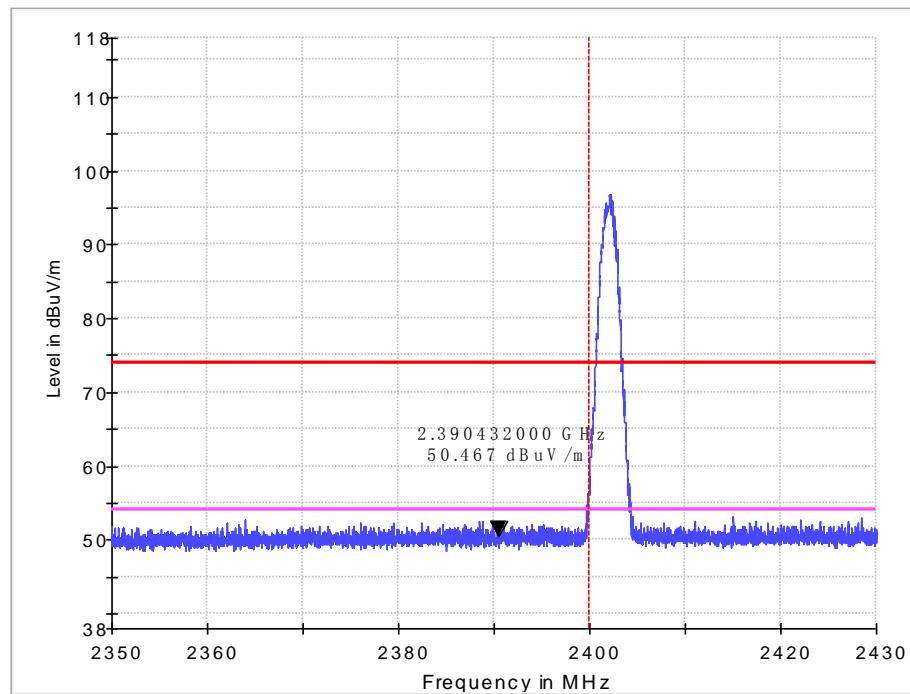



## Vertical

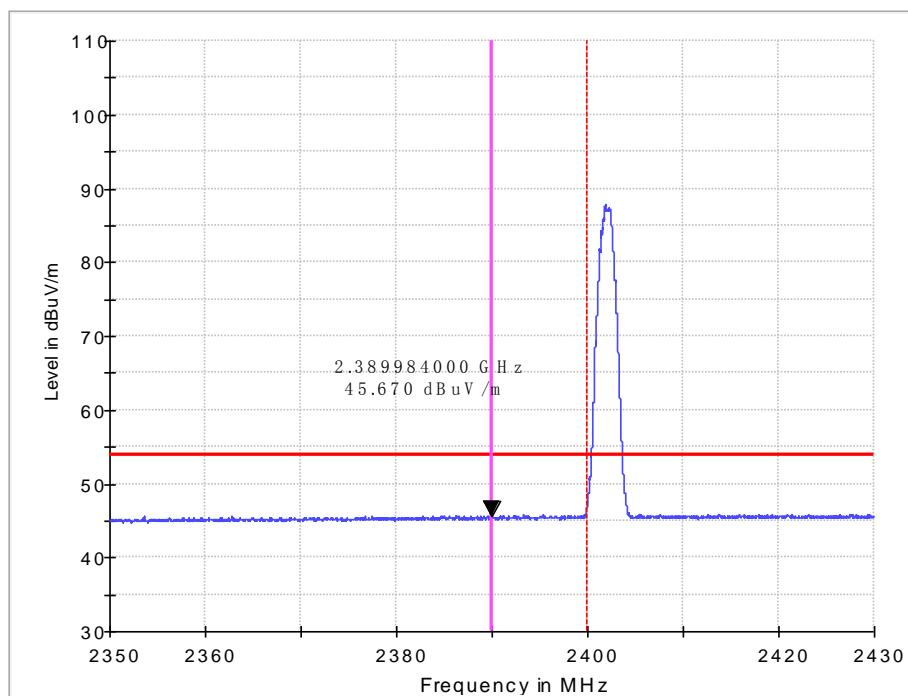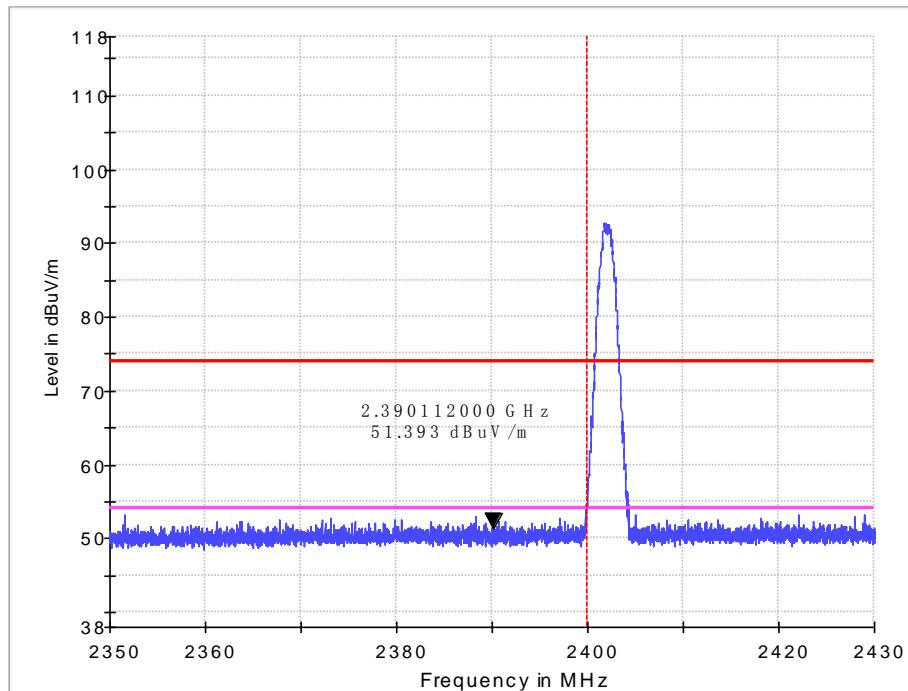



Bluetooth EDR

Upper edge

Horizontal

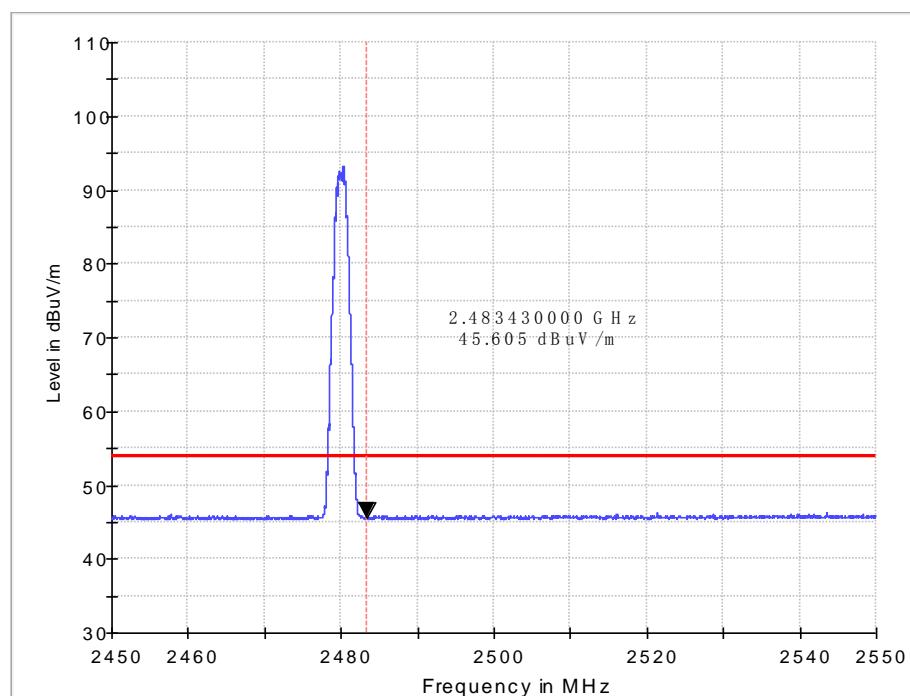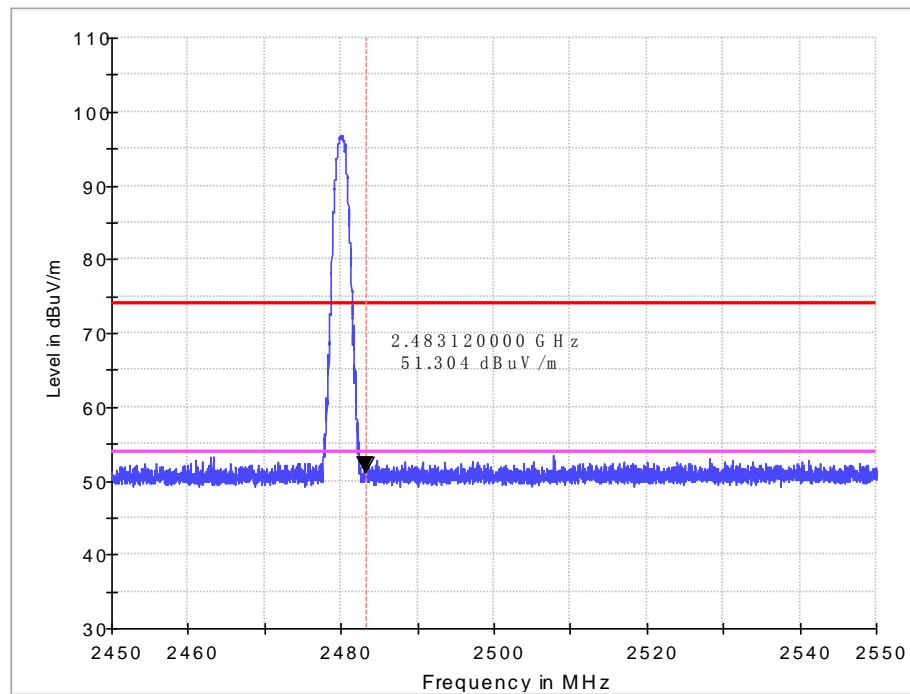

## Vertical

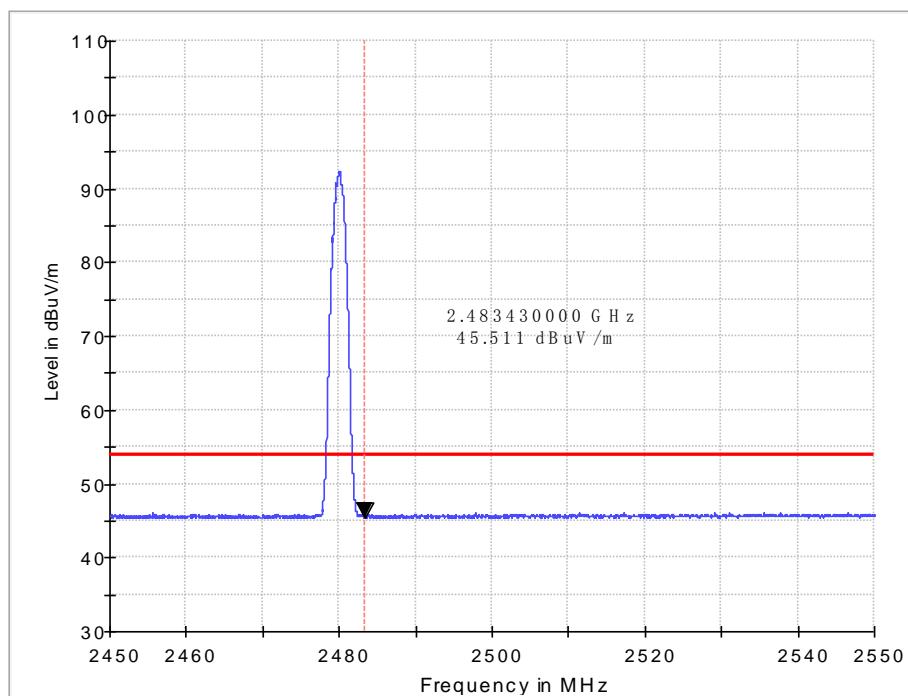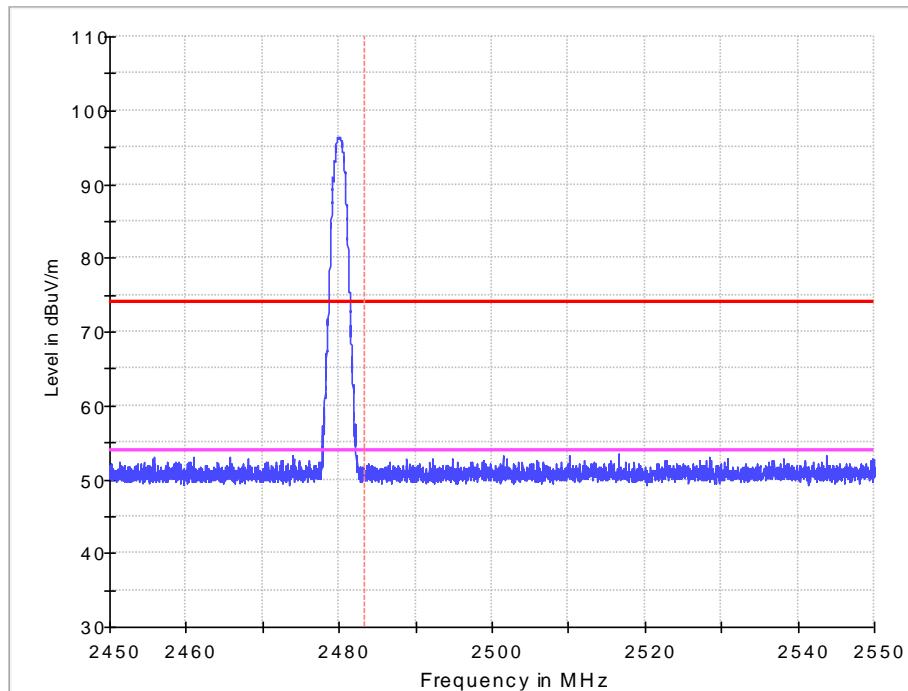

## 13. CONDUCTED SPURIOUS EMISSIONS

### 13.1. Limits of Band Edges Measurement

Below –20dB of the highest emission level of operating band (in 100 kHz resolution bandwidth).

### 13.2. Test Procedure

The transmitter output was connected to the spectrum analyzer.

The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 300 kHz.


The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels.

The bandedges at 2.4 and 2.4835 GHz are investigated with the transmitter set to the normal

### 13.3. TEST RESULTS


## Bluetooth Basic

### Low channel

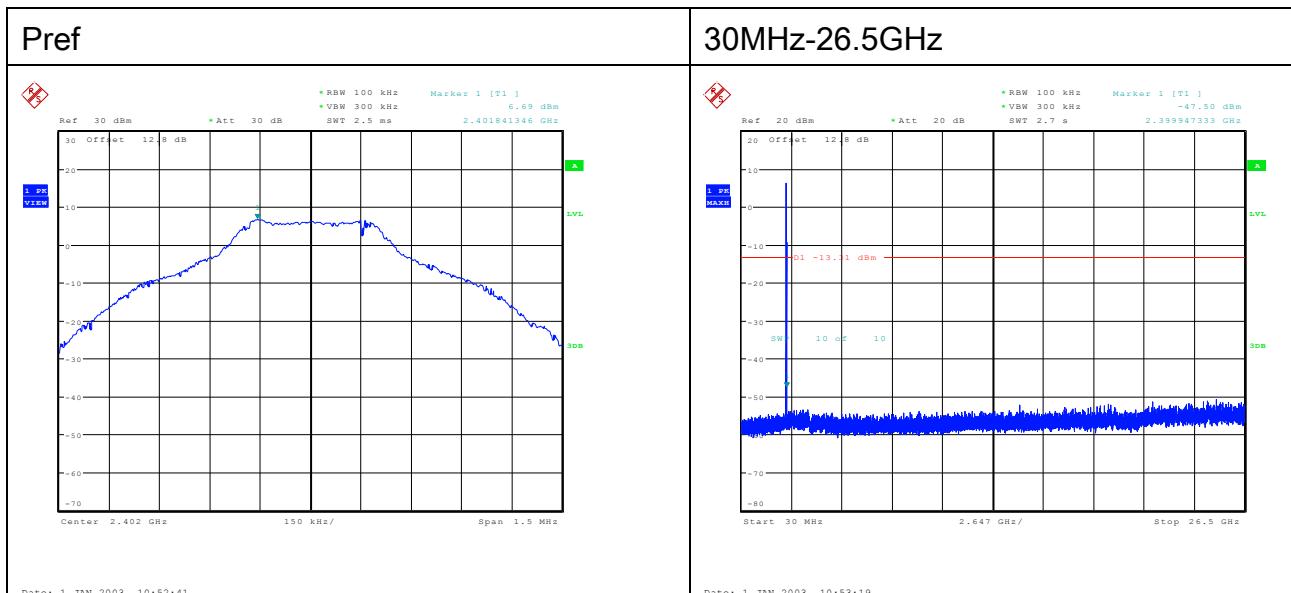


## Bluetooth Basic

### Mid channel

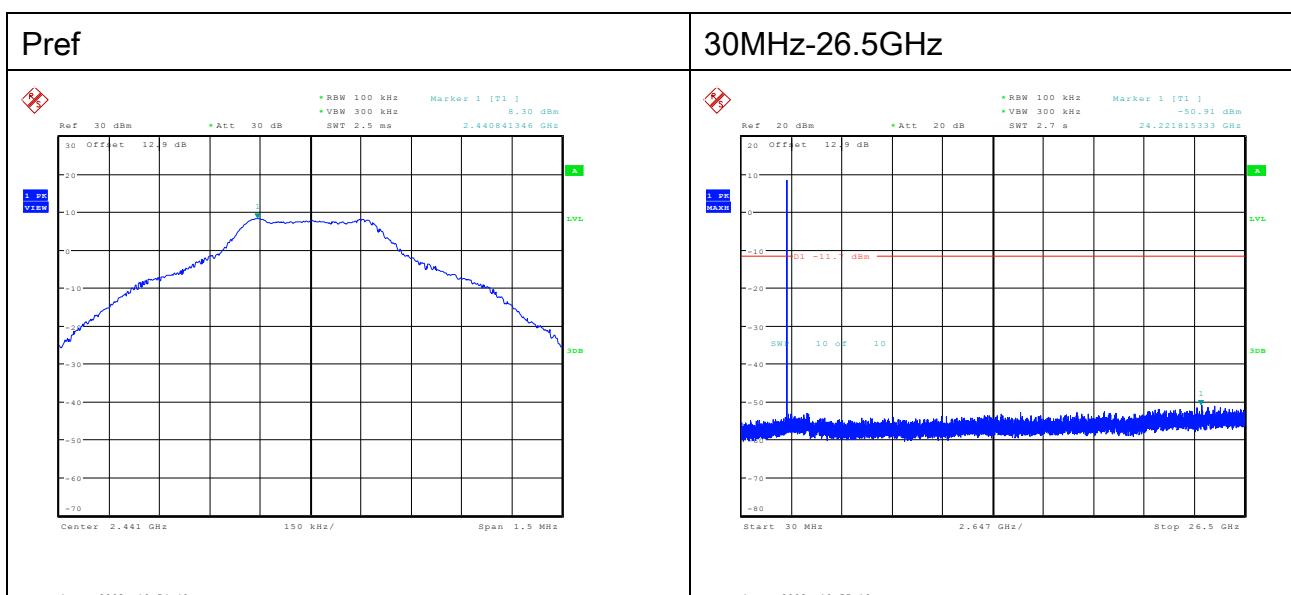


## Bluetooth Basic

## High Channel

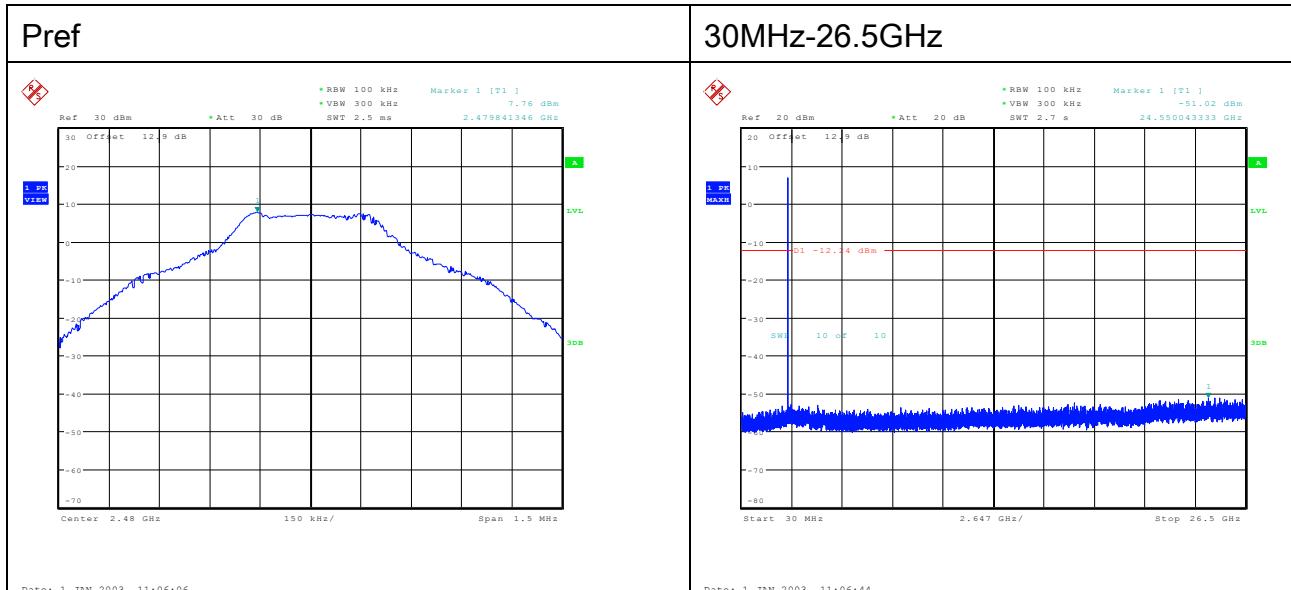


## Bluetooth Basic

## Bandedge hopping On

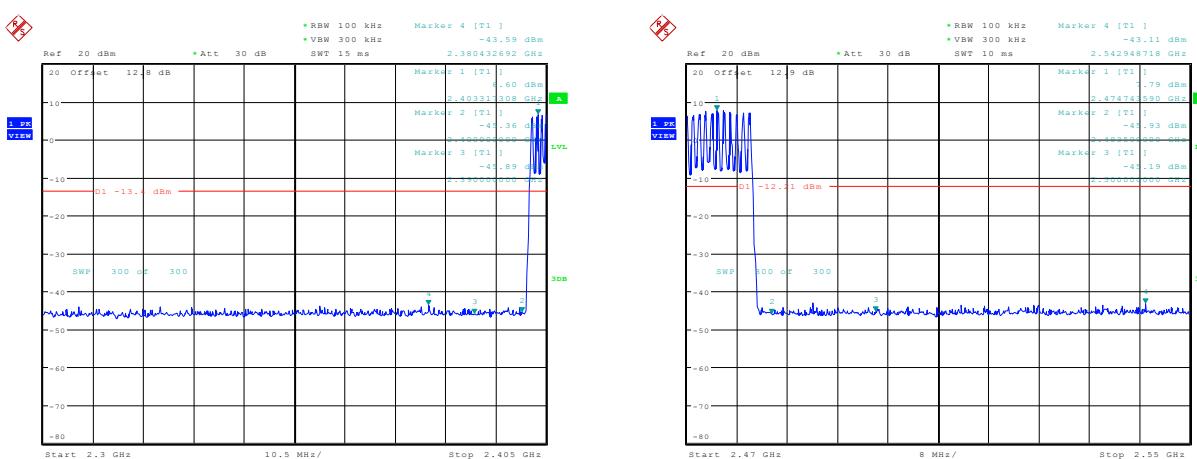


## Bluetooth EDR

### Low Channel

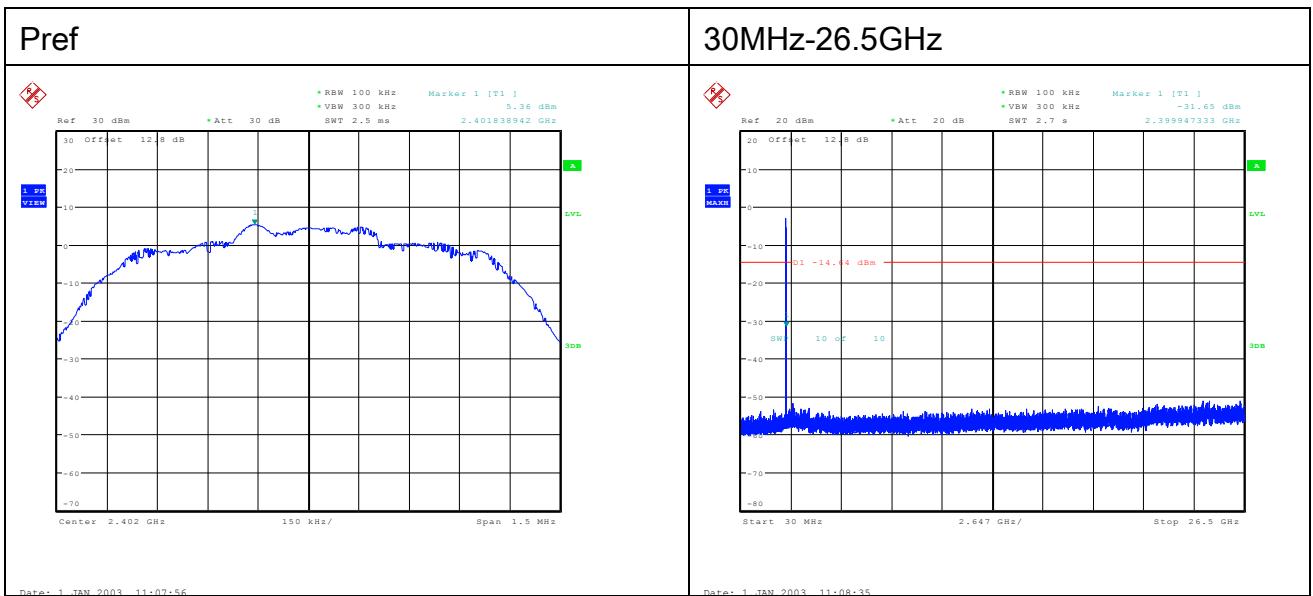


## Bluetooth EDR

### Mid Channel

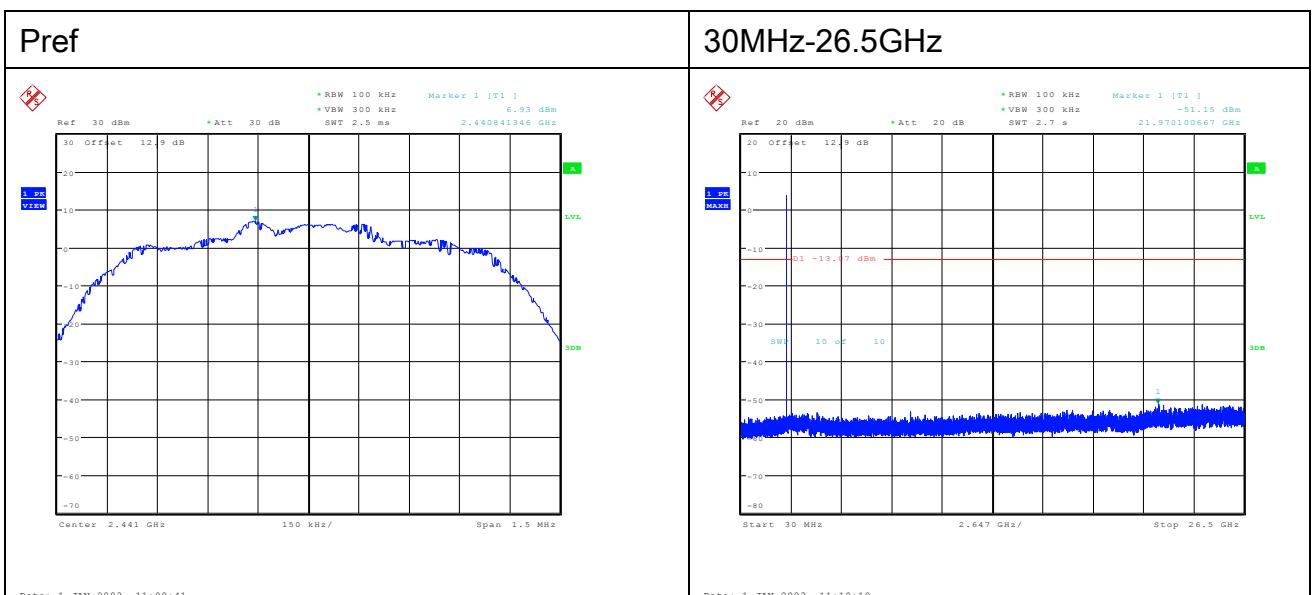


## Bluetooth EDR

### High Channel

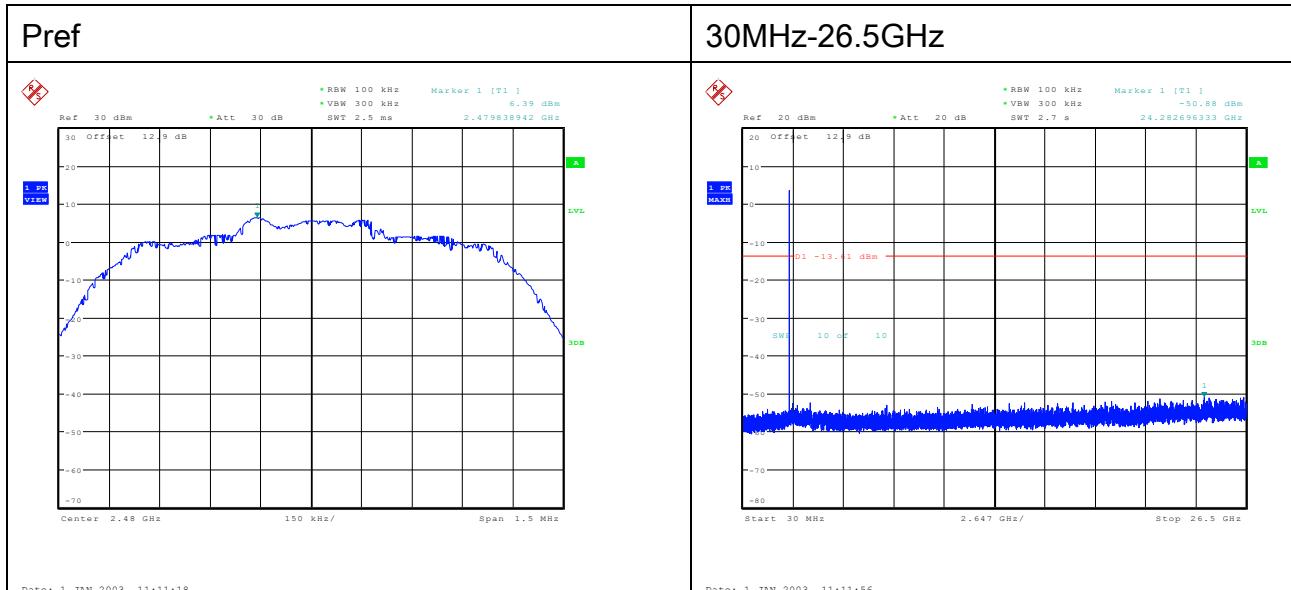

## Bluetooth EDR

### Bandedge

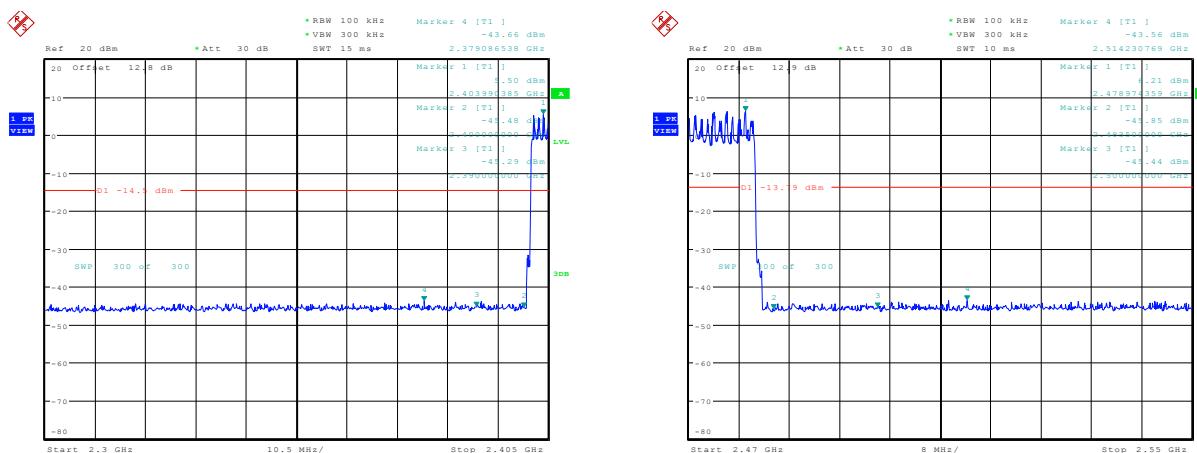

## **14. ANTENNA REQUIREMENTS**

### **14.1. Applicable requirements**

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. For the fixed point-to-point operation, the power shall be reduced by one dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the FCC rule.

### **14.2. Antenna Connector**

Antenna Connector is on the PCB within enclosure and not accessible to user.

### **14.3. Antenna Gain**

The antenna gain of EUT is less than 6 dBi.

---

-----End of Report-----