

TEST REPORT

For

EMV Android Validator

Model Number: FX925F PM, FX925F WM

FCC ID: 2AGQIFX925F

Report Number : WT198005839

Test Laboratory : Shenzhen Academy of Metrology and Quality Inspection
Site Location : NETC Building, No.4 Tongfa Rd., Xili, Nanshan, Shenzhen, China
Tel : 0086-755-86928965
Fax : 0086-755-86009898-31396
Web : www.smq.com.cn
E-mail : emcrf@smq.com.cn

Test report declaration

Applicant : FAMOCO SAS
Address : 59 avenue Victor Hugo Paris, France
Manufacturer : FAMOCO SAS
Address : 59 avenue Victor Hugo Paris, France
EUT Description : EMV Android Validator
Model No. : FX925F PM,FX925F WM
Trade mark : FAMOCO
Serial Number : /
FCC ID : 2AGQIFX925F

Test Standards:

FCC Part 15 15.209, 15.247(2018)

The EUT described above is tested by Shenzhen Academy of Metrology and Quality Inspection EMC Laboratory to determine the maximum emissions from the EUT. Shenzhen Academy of Metrology and Quality Inspection EMC Laboratory is assumed full responsibility for the accuracy of the test results.

The test report is valid for above tested sample only and shall not be reproduced in part without written approval of the laboratory.


Project Engineer:		Date:	Nov.08, 2019
	(Zhou Fangai 周芳媛)		
Checked by:		Date:	Nov.08, 2019
	(Lin Yixiang 林奕翔)		
Approved by:		Date:	Nov.08, 2019
	(Lin Bin 林斌)		

TABLE OF CONTENTS

TEST REPORT DECLARATION.....	2
1. TEST RESULTS SUMMARY	5
2. GENERAL INFORMATION.....	6
2.1. Report information.....	6
2.2. Laboratory Accreditation and Relationship to Customer	6
2.3. Measurement Uncertainty	6
3. PRODUCT DESCRIPTION	7
3.1. EUT Description	7
3.2. Related Submittal(s) / Grant (s).....	7
3.3. Block Diagram of EUT Configuration	7
3.4. Operating Condition of EUT	7
3.5. Support Equipment List.....	8
3.6. Test Conditions	8
3.7. Special Accessories	8
3.8. Equipment Modifications	8
4. TEST EQUIPMENT USED.....	9
5. RADIATED EMISSION TEST.....	10
5.1. Test Standard and Limit	10
5.2. Test Procedure.....	10
5.3. Test Arrangement	10
5.4. Test Data.....	11
6. 20DB BANDWIDTH MEASUREMENT	29
6.1. LIMITS OF 20dB BANDWIDTH MEASUREMENT.....	29
6.2. TEST PROCEDURE	29
6.3. TEST SETUP	29
6.4. Test Data.....	29
7. CARRIER FREQUENCY SEPARATION MEASUREMENT	32
7.1. LIMITS OF CARRIER FREQUENCY SEPARATION MEASUREMEN	32
7.2. TEST PROCEDURES.....	32
7.3. TEST SETUP	32
7.4. Test Data.....	32
8. NUMBER OF HOPPING CHANNEL.....	35
8.1. LIMITS OF NUMBER OF HOPPING CHANNEL.....	35
8.2. TEST PROCEDURE	35
8.3. TEST SETUP	35
8.4. Test Data.....	36
9. TIME OF OCCUPANCY.....	37
9.1. LIMITS OF TIME OF OCCUPANCY	37
9.2. TEST PROCEDURE	37
9.3. TEST RESULTS	38
10. PEAK POWER.....	42
10.1. LIMITS OF Peak Power.....	42

10.2.	TEST PROCEDURE.....	42
10.3.	TEST RESULTS.....	42
11.	BAND EDGES MEASUREMENT.....	45
11.1.	Limits of Band Edges Measurement.....	45
11.2.	TEST PROCEDURE.....	45
11.3.	Test Results.....	45
12.	CONDUCTED SPURIOUS EMISSIONS.....	54
12.1.	Limits of Band Edges Measurement.....	54
12.2.	Test Procedure	54
12.3.	TEST RESULTS.....	54
13.	ANTENNA REQUIREMENTS	59
13.1.	Applicable requirements	59
13.2.	Antenna Connector.....	59
13.3.	Antenna Gain.....	59

1. TEST RESULTS SUMMARY

Table 1 Test Results Summary

Test Items	FCC Rules	Test Results
20dB bandwidth measurement	15.247 (a) (1)	Pass
Carrier frequency separation measurement	15.247 (a) (1)	Pass
Number of hopping channel	15.247 (a) (1) III	Pass
Time of occupancy	15.247 (a) (1) III	Pass
Peak output power	15.247 (b) (1)	Pass
Band edge compliance measurement	15.247 (d)	Pass
Radiated spurious emission & Radiated restricted band measurement	15.247 (d) / 15.205 & 15.209	Pass
Conducted spurious emissions	15.247 (d)	Pass
Antenna Requirement	15.203	Pass

Remark: "N/A" means "Not applicable."

2. GENERAL INFORMATION

2.1. Report information

This report is not a certificate of quality; it only applies to the sample of the specific product/equipment given at the time of its testing. The results are not used to indicate or imply that they are application to the similar items. In addition, such results must not be used to indicate or imply that SMQ approves recommends or endorses the manufacture, supplier or use of such product/equipment, or that SMQ in any way guarantees the later performance of the product/equipment.

The sample/s mentioned in this report is/are supplied by Applicant, SMQ therefore assumes no responsibility for the accuracy of information on the brand name, model number, origin of manufacture or any information supplied.

Additional copies of the report are available to the Applicant at an additional fee. No third part can obtain a copy of this report through SMQ, unless the applicant has authorized SMQ in writing to do so.

2.2. Laboratory Accreditation and Relationship to Customer

The testing report were performed by the Shenzhen Academy of Metrology and quality Inspection EMC Laboratory (Guangdong EMC compliance testing center), in their facilities located at NETC Building, No.4 Tongfa Rd., Xili, Nanshan, Shenzhen, China. At the time of testing, Laboratory is accredited by the following organizations:

China National Accreditation Service for Conformity Assessment (CNAS) accredits the Laboratory for conformance to FCC standards, EMC international standards and EN standards. The Registration Number is CNAS L0579.

The Laboratory is Accredited Testing Laboratory of FCC with Designation number CN1165 and Site registration number 582918.

The Laboratory is registered to perform emission tests with Innovation, Science and Economic Development (ISED), and the registration number is 11177A.

2.3. Measurement Uncertainty

Conducted Emission
9 kHz~30MHz 2.9dB

Radiated Emission
30MHz~1000MHz 5.1dB
1GHz~6GHz 5.04dB
6GHz~18GHz 5.54dB
18GHz~26.5GHz 5.54dB

3. PRODUCT DESCRIPTION

3.1. EUT Description

Description : EMV Android Validator
Manufacturer : FAMOCO SAS
Model Number : FX925F PM,FX925F WM
Operate Frequency : 2.402GHz~2.480GHz
Antenna Designation : BT: PIFA ANTENNA +1.3dBi
Operating voltage : 10.8V (Low)/12V (Nominal)/ 13.2V (Max)
Software Version : MOLY.LR12A.R2.MP.V44.1
Hardware Version : FX925F,1

Remark: 1. FX925F PM compared with FX925F WM, only have different model number and appearance. All of the models' circuit theory, electrical design and the Critical Components are the same. The differences do not affect the RF performance. Unless otherwise specified, the model FX925F PM was chosen as representative model to perform all the tests.

2. This test report is for application of FCC ID: 2AGQIFX925F, which consists of reuse data of FCC ID: 2AGQIFX205. The FX925F PM adds scanner and USB HUB function, changes NFC operation on hardware and software. The WWAN, WLAN and Bluetooth's circuit theory, electrical design and the critical components are the same. Considering above changes, in this test report, only 20dB bandwidth, Peak output power, Radiated Bandedge and Radiated spurious emission was re-tested, test data from Test Report: WT198003468 are reused in this report to cover other test items.

3.2. Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for FCC ID: **2AGQIFX925F** filing to comply with Section 15.207, 15.209, 15.247 of the FCC Part 15, Subpart C .

3.3. Block Diagram of EUT Configuration




Figure 1 EUT setup

3.4. Operating Condition of EUT

The transmitter has a maximum peak conducted output power of Basic rate GFSK

modulation and EDR mode 8DPSK modulation. Tests were performed with Basic rate GFSK modulation and EDR mode 8DPSK modulation.

3.5. Support Equipment List

Table 2 Support Equipment List

Name	Model No	S/N	Manufacturer
DC Battery	--	--	--
Mouse	MSU1465	--	HP

3.6. Test Conditions

Date of re-test : Oct.30, 2019- Nov.05, 2019

Date of EUT Receive : Oct.15, 2019

Temperature: 21°C-26 °C

Relative Humidity: 37%-54%

Date of test : Jun.29, 2019- Jul.17, 2019

Date of EUT Receive : Jun.20, 2019

Temperature: 22°C-26 °C

Relative Humidity: 41%-53%

3.7. Special Accessories

Not available for this EUT intended for grant.

3.8. Equipment Modifications

Not available for this EUT intended for grant.

4. TEST EQUIPMENT USED

Table 3 Test Equipment

No.	Equipment	Manufacturer	Model No.	Last Cal.	Cal. Interval
SB12943	Test Receiver	R&S	ESR7	Dec.06,2018	1 Year
SB5472/02	Broadband Antenna	Schwarzbeck	VULB9163	May.31,2019	1 Year
SB8501/09	Test Receiver	R&S	ESU40	Mar.11,2019	1 Year
SB3435	Horn Antenna	R&S	HF906	Jan.01,2019	1 Year
SB9058/03	Pre-Amplifier	R&S	SCU 18	Feb.18,2019	1 Year
SB8501/10	Horn Antenna	R&S	3160-09	Mar.21,2017	3 Years
SB8501/11	Horn Antenna	R&S	3160-09	Mar.21,2017	3 Years
SB8501/12	Horn Antenna	R&S	3160-10	Mar.21,2017	3 Years
SB8501/13	Horn Antenna	R&S	3160-10	Mar.21,2017	3 Years
SB3345	Loop Antenna	Schwarzbeck	FMZB1516-113	Feb.20,2019	1 Year
SB8501/14	Pre-Amplifier	R&S	SCU-03	Feb.20,2019	1 Year
SB8501/15	Pre-Amplifier	R&S	SCU-03	Feb.20,2019	1 Year
SB8501/16	Pre-Amplifier	R&S	SCU 26	Feb.18,2019	1 Year
SB8501/17	Pre-Amplifier	R&S	SCU-18	Feb.20,2019	1 Year
SB9059	Preamplifier	R&S	SCU-40	Aug.27,2019	1 Year
SB7941/02	Signal Analyzer	R&S	FSU26	May.29,2019	1 Year

5. RADIATED EMISSION TEST

5.1. Test Standard and Limit

5.1.1. Test Standard

FCC Part 15 15.209

5.1.2. Test Limit

Table 4 Radiation Emission Test Limit for FCC (Class B) (9 kHz-1GHz)

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
960~1000	500	3

Table 5 Radiation Emission Test Limit for FCC (Class B) (Above 1G)

Frequency (MHz)	(dBuV/m) (at 3 meters)	
	PEAK	AVERAGE
Above 1000	74	54

* The lower limit shall apply at the transition frequency.

* The test distance is 3m.

5.2. Test Procedure

The EUT is placed on a non-conducting table 80 cm above the ground plane for measurement below 1GHz; 1.5 m above the ground plane for measurement above 1GHz. The antenna to EUT distance is 3 meters. The EUT is configured in accordance with ANSI C63.10-2013. The EUT is set to transmit in a continuous mode. Radiated measurements were performed on the frequency range from 30MHz to 25GHz. All readings from 30 MHz to 1 GHz are quasi-peak values with a resolution bandwidth of 120 kHz, $VBW \geq RBW$. All readings above 1 GHz are AV and PK values. $RBW=1MHz$ and $1/T (10Hz)$ for AV value, $RBW=1MHz$ and $VBW \geq RBW$ for peak value. Measurements were made at 3 meters

5.3. Test Arrangement

The arrangement of the equipment is installed to meet the standards and operating in a manner, which tends to maximize its emission characteristics in a normal application. The detailed information refers to test picture.

5.4. Test Data

The emissions don't show in following result tables are more than 20dB below the limits.

Bluetooth basic rate and Bluetooth EDR mode were tested, below only shows worst case result of Bluetooth basic rate.

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported.

9kHz-30MHz

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported.

Table 6 Radiated Emission Test Data 9k Hz-30MHz

Frequency (MHz)	Cable Loss +preamp (dB)	Antenna Factor (dB)	Readings (dB μ V/m)	Level (dB μ V/m)	Polarity (H/V)	Limits (dB μ V/m)	Margin (dB)	Note
--	--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--	--

30MHz-1GHz

Worst case is shown below for 30MHz-1GHz only.

The emissions don't show in following result tables are more than 20dB below the limits.


Table 7 Radiated Emission Test Data 30MHz-1GHz

Frequency (MHz)	Cable Loss +preamp (dB)	Antenna Factor (dB)	Readings (dB μ V/m)	Level (dB μ V/m)	Polarity (H/V)	Limits (dB μ V/m)	Margin (dB)	Note
39.384	0.6	12.3	10.6	23.5	V	40.0	16.5	QP
104.299	1.3	13.2	11.6	26.1	V	43.5	17.4	QP
131.099	1.3	8.9	26.4	36.6	V	43.5	6.9	QP
162.426	1.5	8.7	25.0	35.2	V	43.5	8.3	QP
227.063	1.7	11.2	22.2	35.1	V	46.0	10.9	QP
960.424	3.9	21.1	17.6	42.6	V	54	11.4	QP
39.636	0.6	12.3	13.0	25.9	H	40	14.1	QP
63.263	0.9	12.7	10.5	24.1	H	40	15.9	QP
102.937	1.2	13.2	19.7	34.1	H	43.5	9.4	QP
162.967	1.5	8.7	32.4	42.6	H	43.5	0.9	QP
227.634	1.7	11.2	27.5	40.4	H	46	5.6	QP
960.404	3.9	21.1	22.7	47.7	H	54	6.3	QP

Remark: Emission level (dB μ V)=Read Value(dB μ V/m) + Antenna Factor(dB)+ Cable Loss +preamp(dB)

Radiated Emission

EUT Name: FX925F PM
Operating Condition: Charging and Transmitting
Test site: SMQ NETC EMC Lab.
Antenna Position: Vertical & Horizontal
Comment:

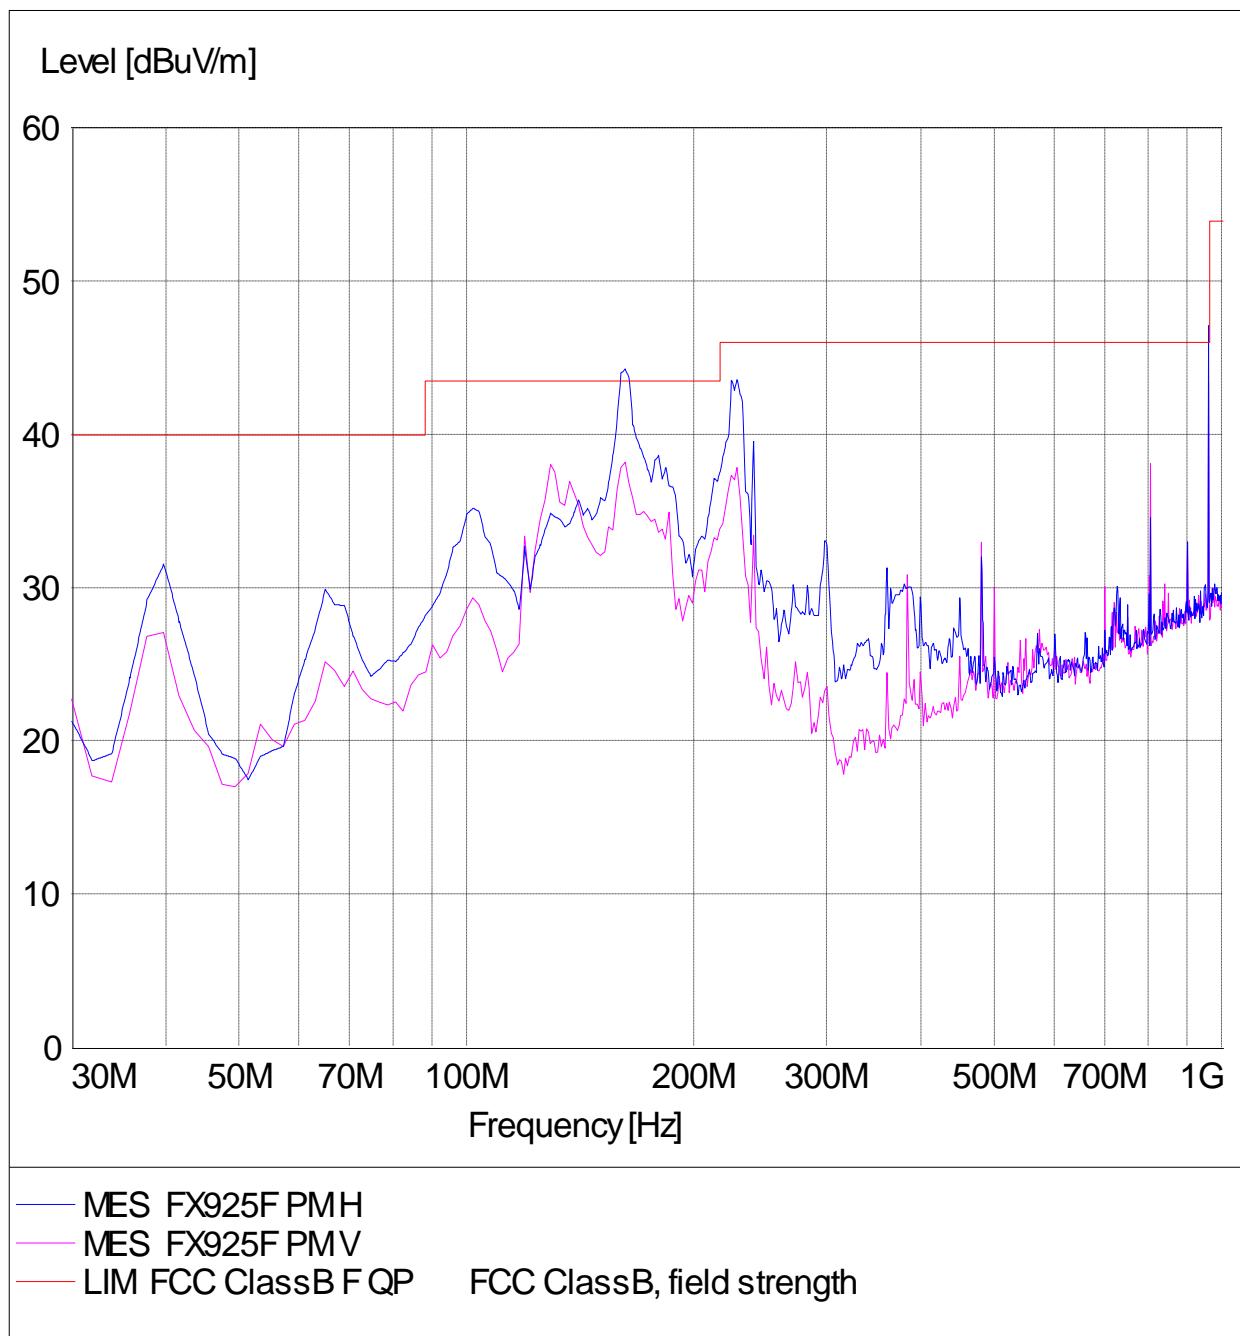

1GHz-18GHz

BDR CH0


Radiated Emission

EUT Information

EUT Model Name: FX925F PM
Operation mode: BT DH1 CH0 TX
Test Voltage:
Comment:

Common Information

Test Site: SMQ EMC Lab.
Environment
Antenna Polarization: Horizontal
Operator Name:
Comment:

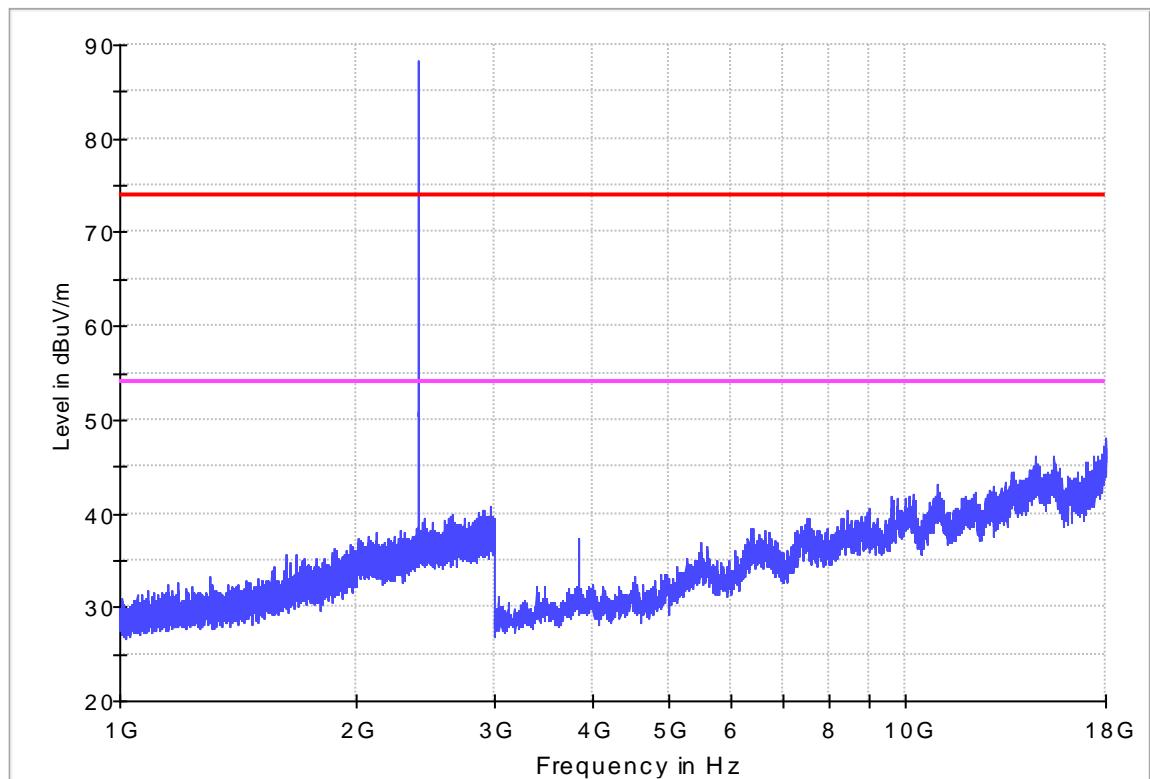


Radiated Emission

EUT Information

EUT Model Name: FX925F PM
Operation mode: BT DH1 CH0 TX
Test Voltage:
Comment:

Common Information

Test Site: SMQ EMC Lab.
Environment
Antenna Polarization: Vertical
Operator Name:
Comment:

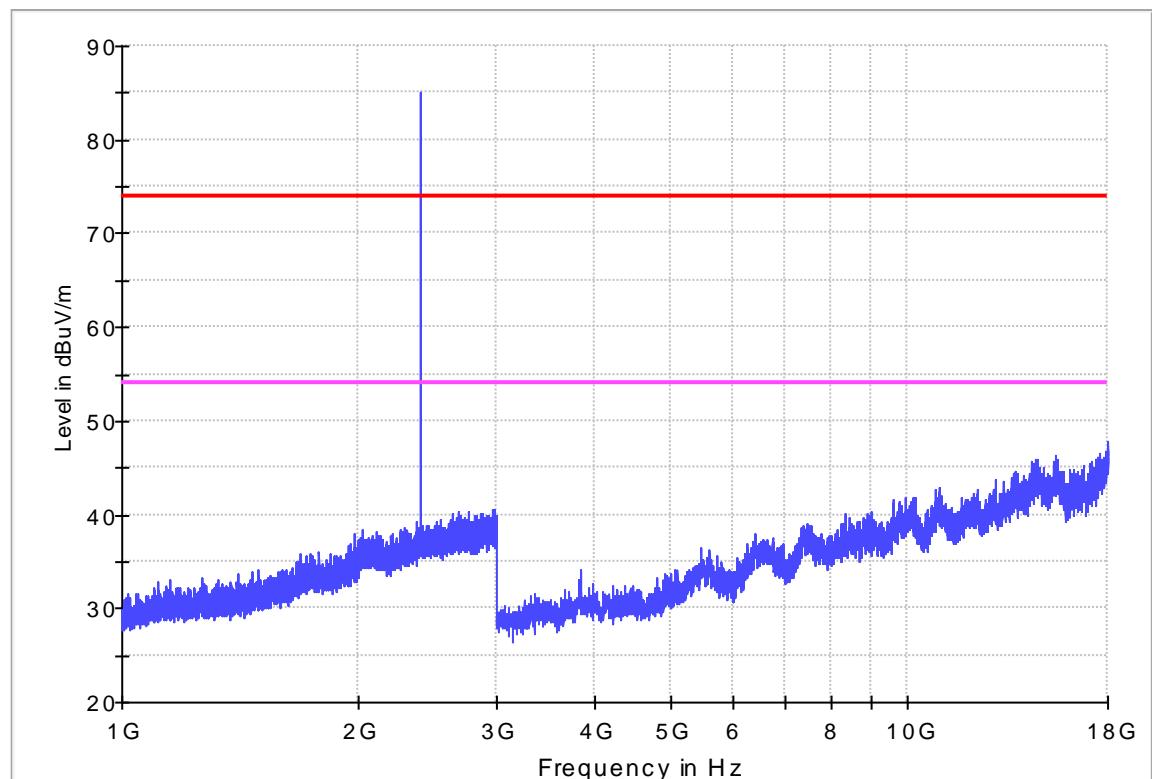

1GHz-18GHz

BDR CH39


Radiated Emission

EUT Information

EUT Model Name: FX925F PM
Operation mode: BT DH1 CH39 TX
Test Voltage:
Comment:

Common Information

Test Site: SMQ EMC Lab.
Environment
Antenna Polarization: Horizontal
Operator Name:
Comment:

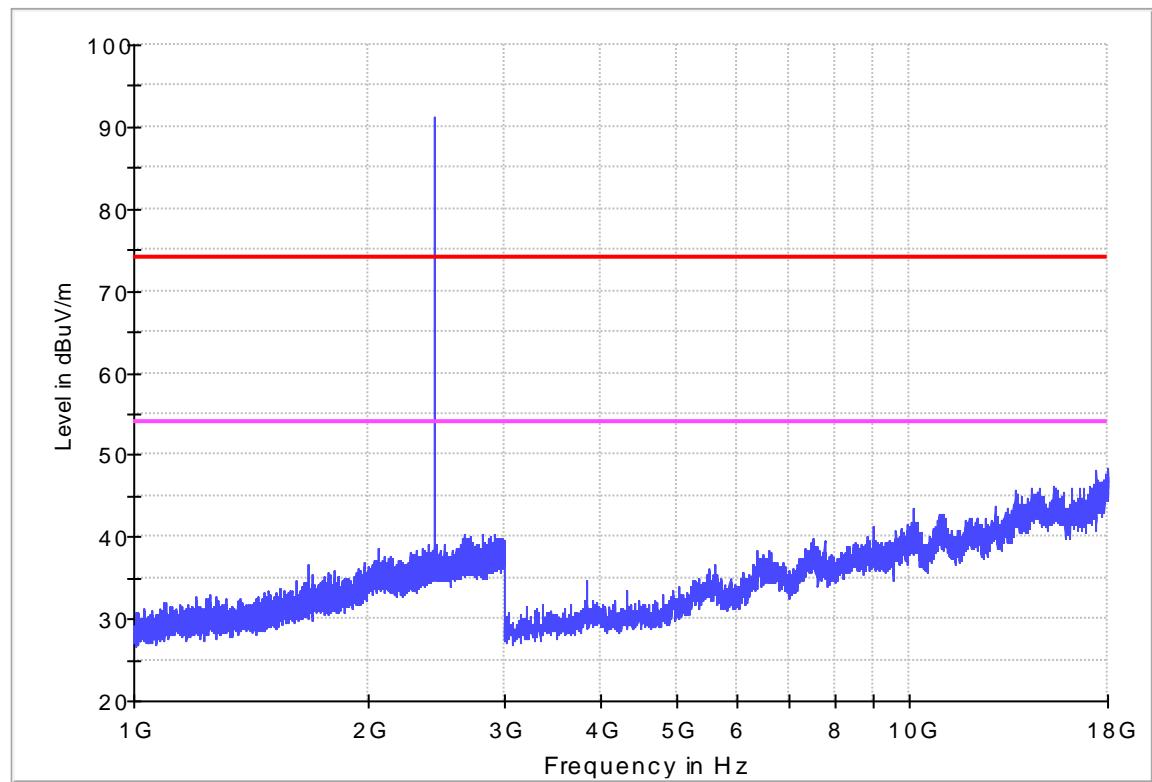


Radiated Emission

EUT Information

EUT Model Name: FX925F PM
Operation mode: BT DH1 CH39 TX
Test Voltage:
Comment:

Common Information

Test Site: SMQ EMC Lab.
Environment
Antenna Polarization: Vertical
Operator Name:
Comment:

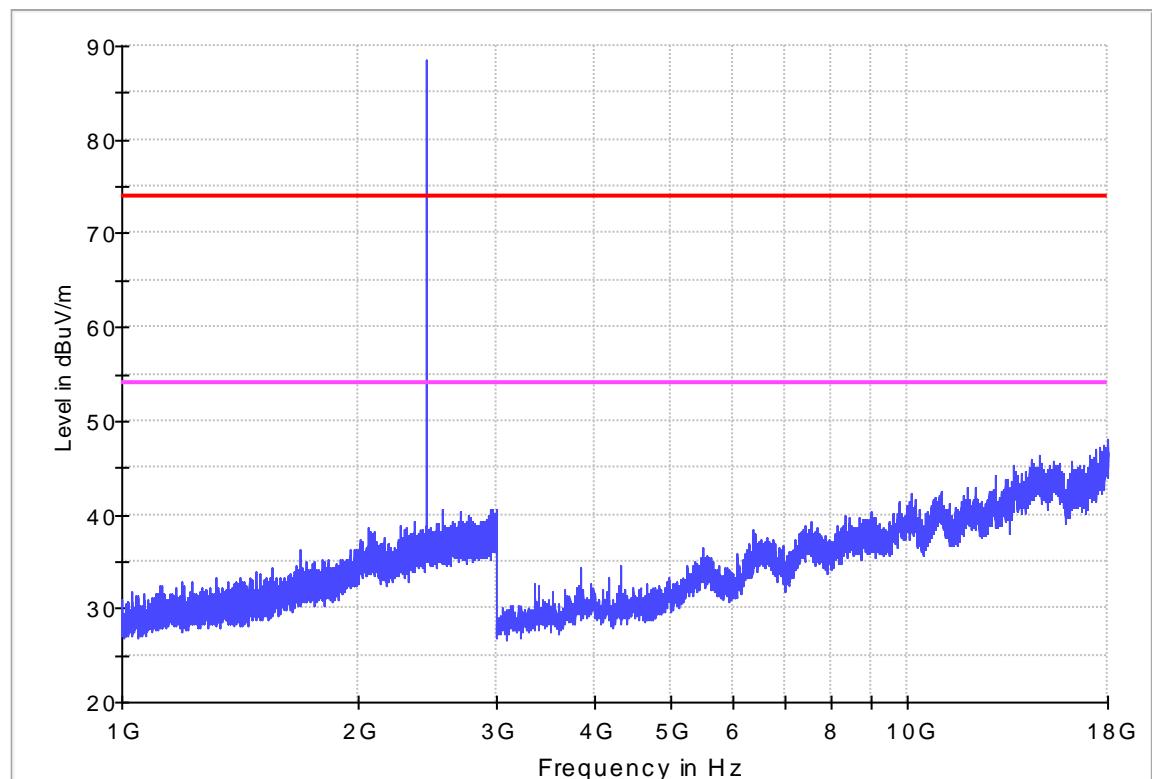

1GHz-18GHz

BDR CH78


Radiated Emission

EUT Information

EUT Model Name: FX925F PM
Operation mode: BT DH1 CH78 TX
Test Voltage:
Comment:

Common Information

Test Site: SMQ EMC Lab.
Environment
Antenna Polarization: Horizontal
Operator Name:
Comment:

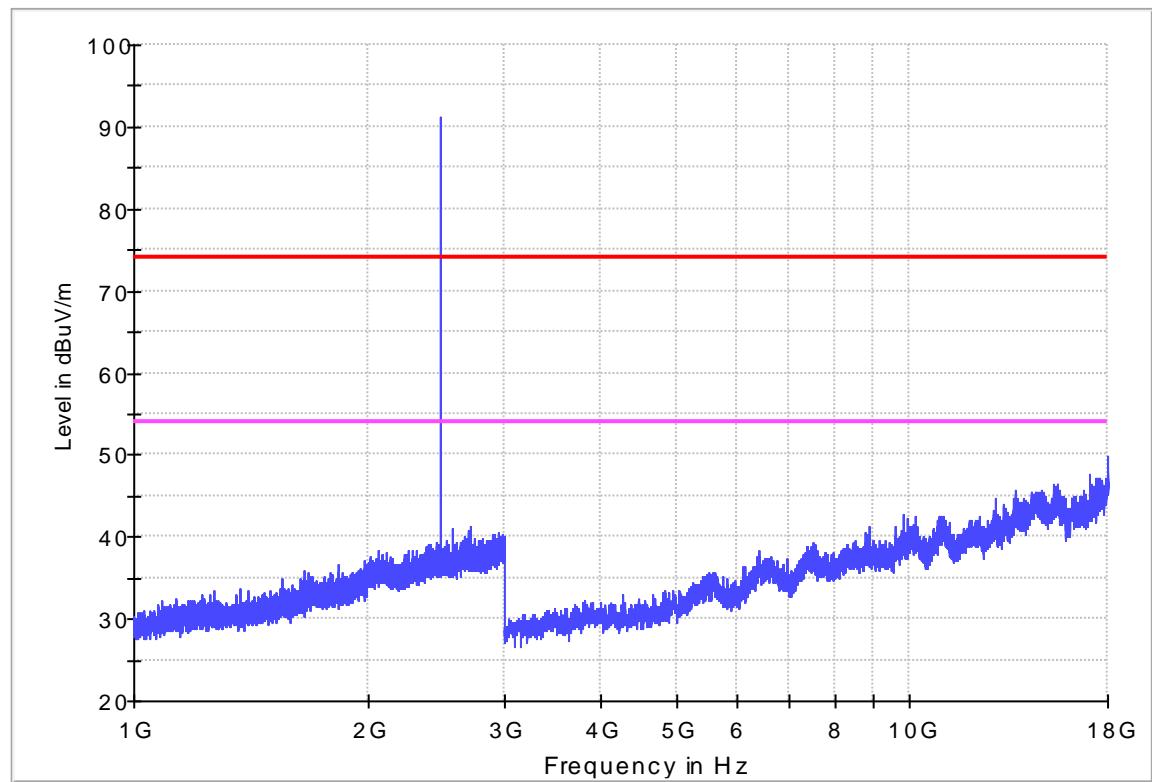


Radiated Emission

EUT Information

EUT Model Name: FX925F PM
Operation mode: BT DH1 CH78 TX
Test Voltage:
Comment:

Common Information

Test Site: SMQ EMC Lab.
Environment
Antenna Polarization: Vertical
Operator Name:
Comment:

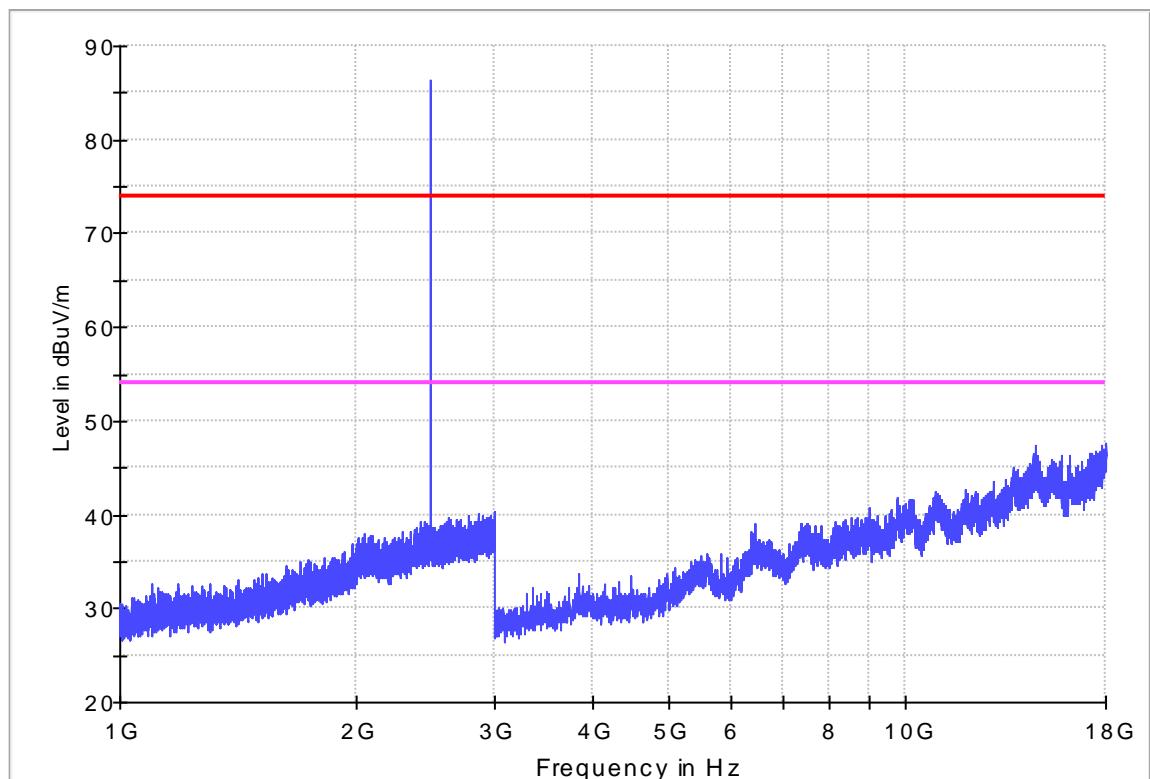

1GHz-18GHz

EDR CH0


Radiated Emission

EUT Information

EUT Model Name: FX925F PM
Operation mode: BT 3DH1 CH0 TX
Test Voltage:
Comment:

Common Information

Test Site: SMQ EMC Lab.
Environment
Antenna Polarization: Horizontal
Operator Name:
Comment:

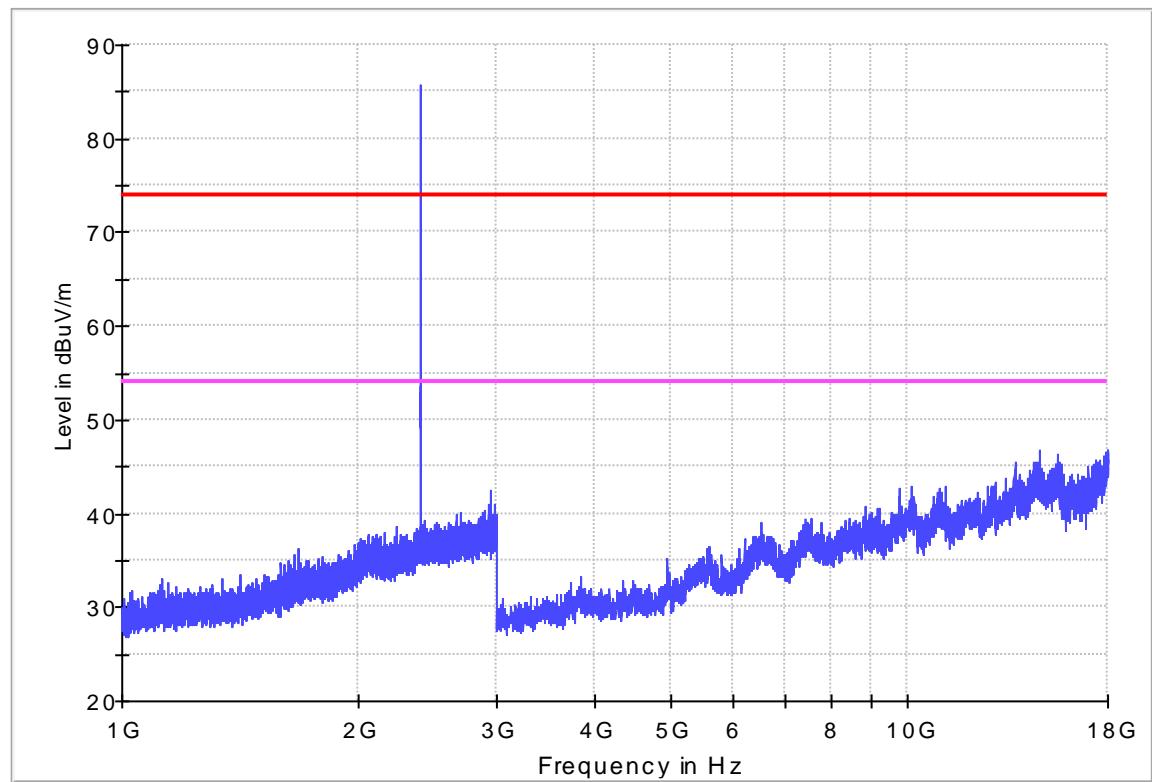


Radiated Emission

EUT Information

EUT Model Name: FX925F PM
Operation mode: BT 3DH1 CH0 TX
Test Voltage:
Comment:

Common Information

Test Site: SMQ EMC Lab.
Environment
Antenna Polarization: Vertical
Operator Name:
Comment:

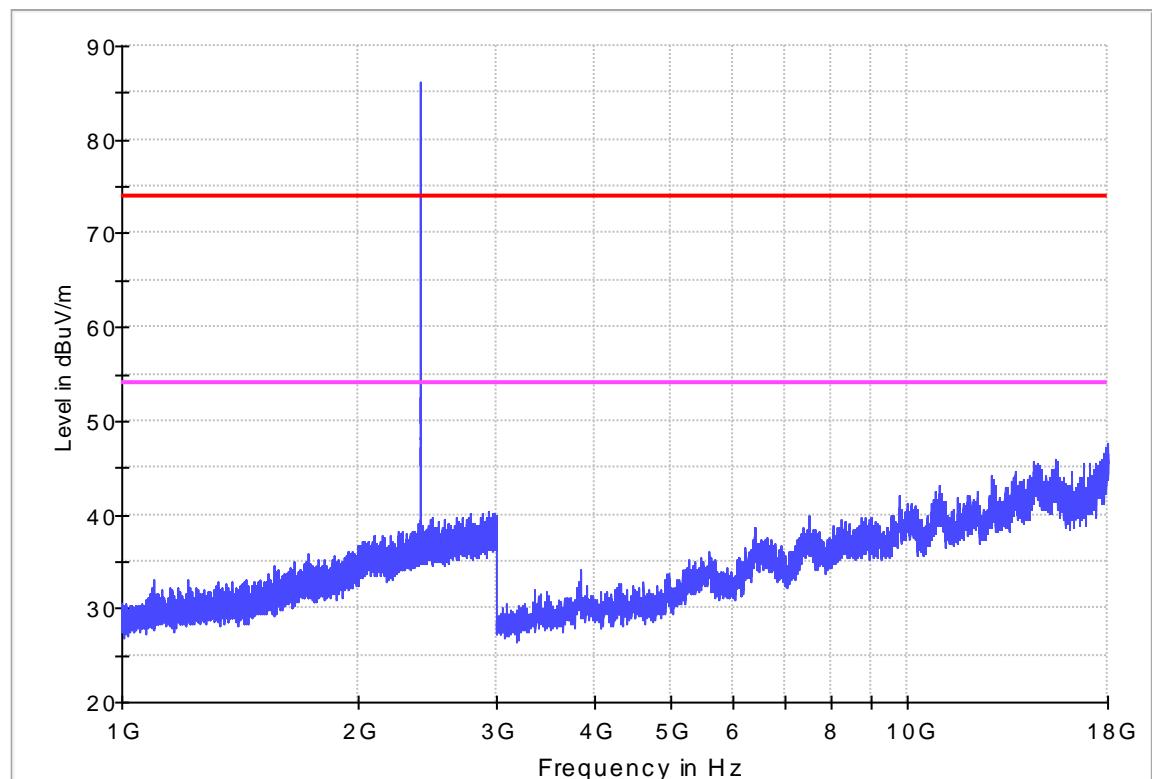

1GHz-18GHz

EDR CH39


Radiated Emission

EUT Information

EUT Model Name: FX925F PM
Operation mode: BT 3DH1 CH39 TX
Test Voltage:
Comment:

Common Information

Test Site: SMQ EMC Lab.
Environment
Antenna Polarization: Horizontal
Operator Name:
Comment:

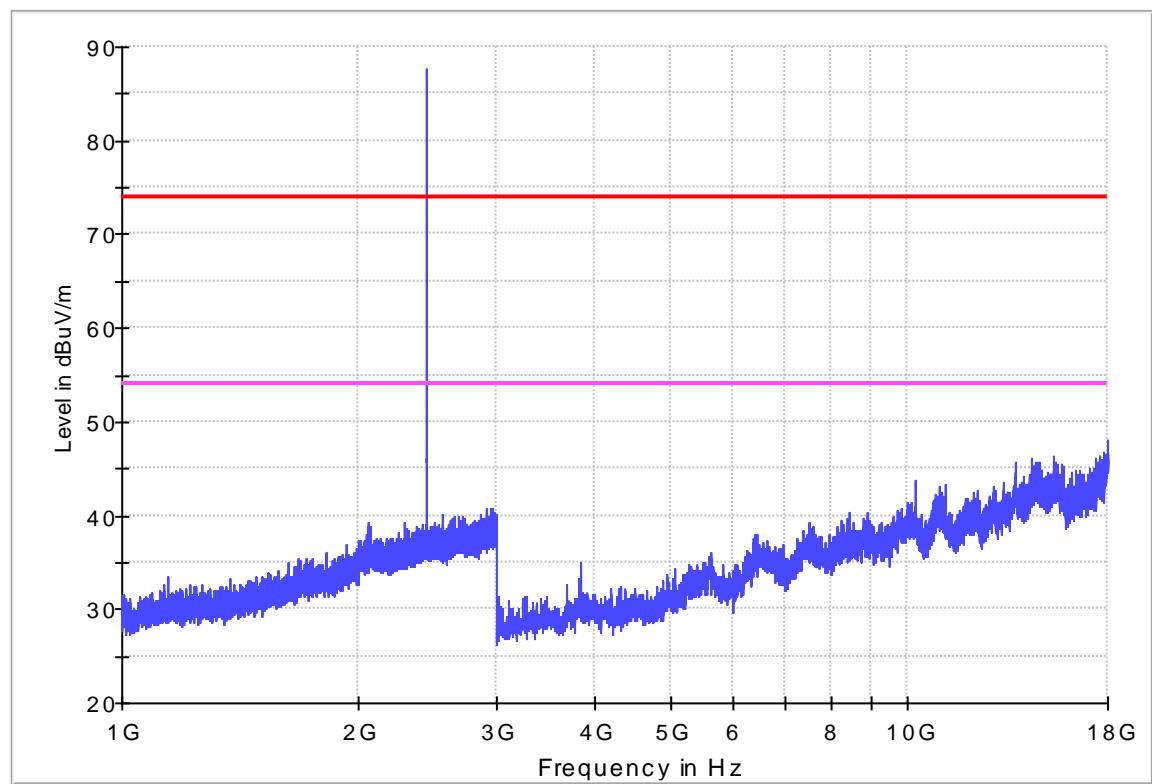


Radiated Emission

EUT Information

EUT Model Name: FX925F PM
Operation mode: BT 3DH1 CH39 TX
Test Voltage:
Comment:

Common Information

Test Site: SMQ EMC Lab.
Environment
Antenna Polarization: Vertical
Operator Name:
Comment:

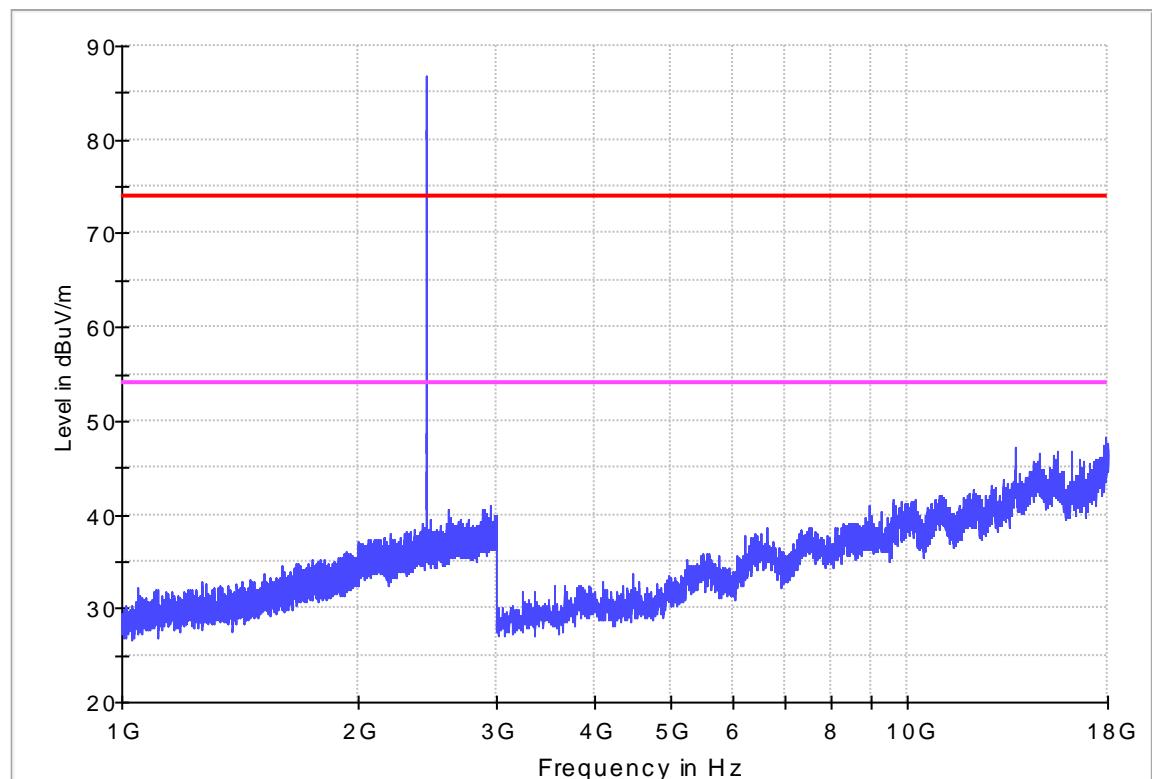

1GHz-18GHz

BDR CH78


Radiated Emission

EUT Information

EUT Model Name: FX925F PM
Operation mode: BT 3DH1 CH78 TX
Test Voltage:
Comment:

Common Information

Test Site: SMQ EMC Lab.
Environment
Antenna Polarization: Horizontal
Operator Name:
Comment:

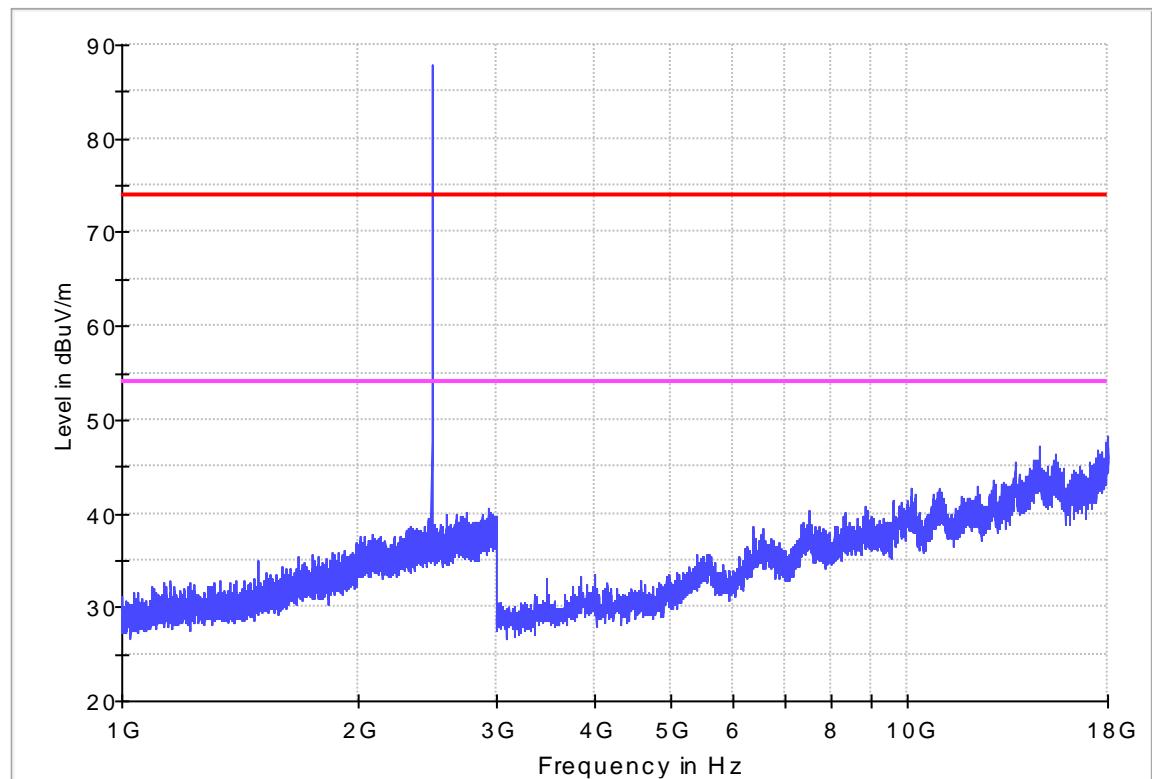


Radiated Emission

EUT Information

EUT Model Name: FX925F PM
Operation mode: BT 3DH1 CH78 TX
Test Voltage:
Comment:

Common Information

Test Site: SMQ EMC Lab.
Environment
Antenna Polarization: Vertical
Operator Name:
Comment:

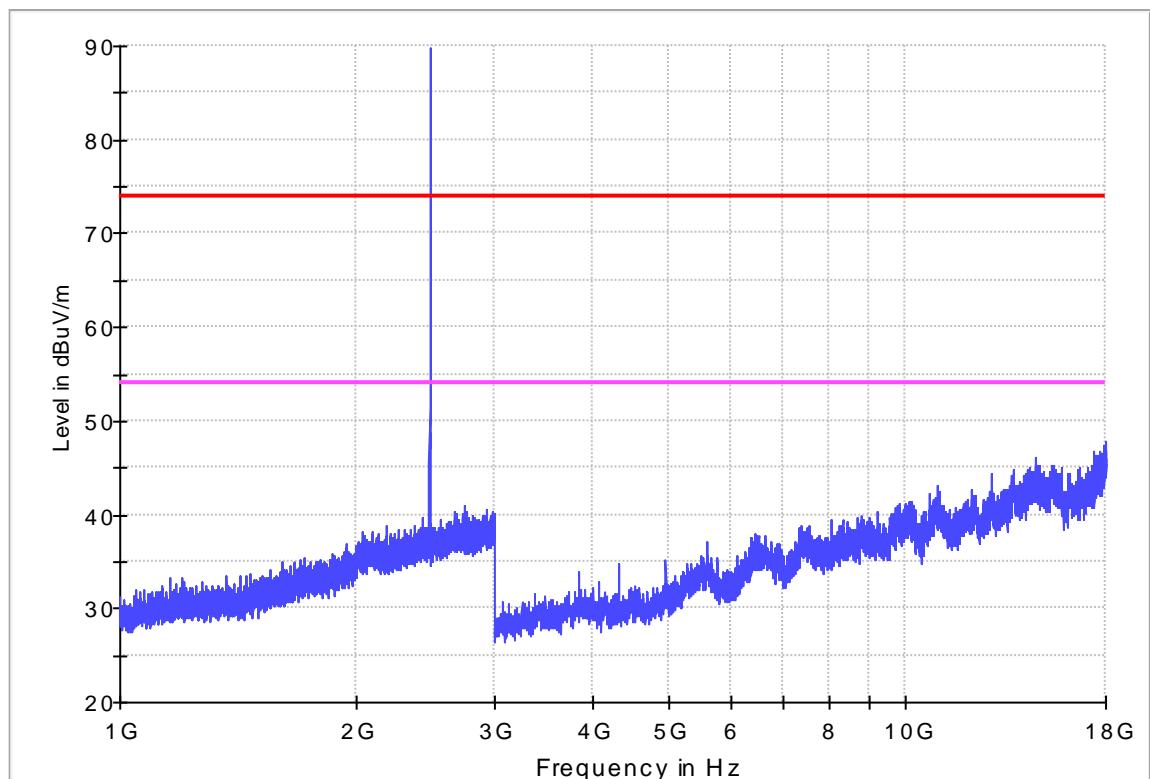

18-26.5GHz

No Peak found in pre-scan, only worst case result is listed in this report.


Radiated Emission

EUT Information

EUT Model Name: FX925F PM
Operation mode: BT
Test Voltage:
Comment:

Common Information

Test Site: SMQ EMC Lab.
Environment
Antenna Polarization: Horizontal
Operator Name:
Comment:

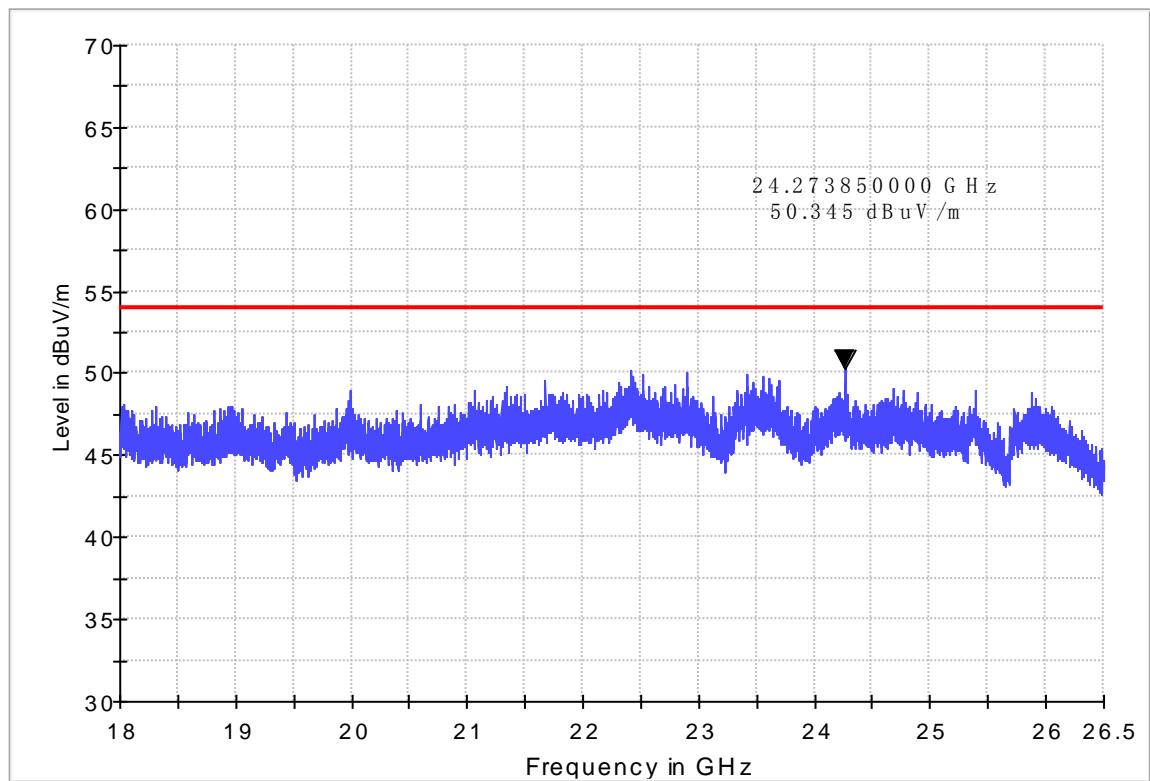

Radiated Emission

EUT Information

EUT Model Name: FX925F PM
Operation mode: BT
Test Voltage:
Comment:

Common Information

Test Site: SMQ EMC Lab.
Environment
Antenna Polarization: Vertical
Operator Name:
Comment:

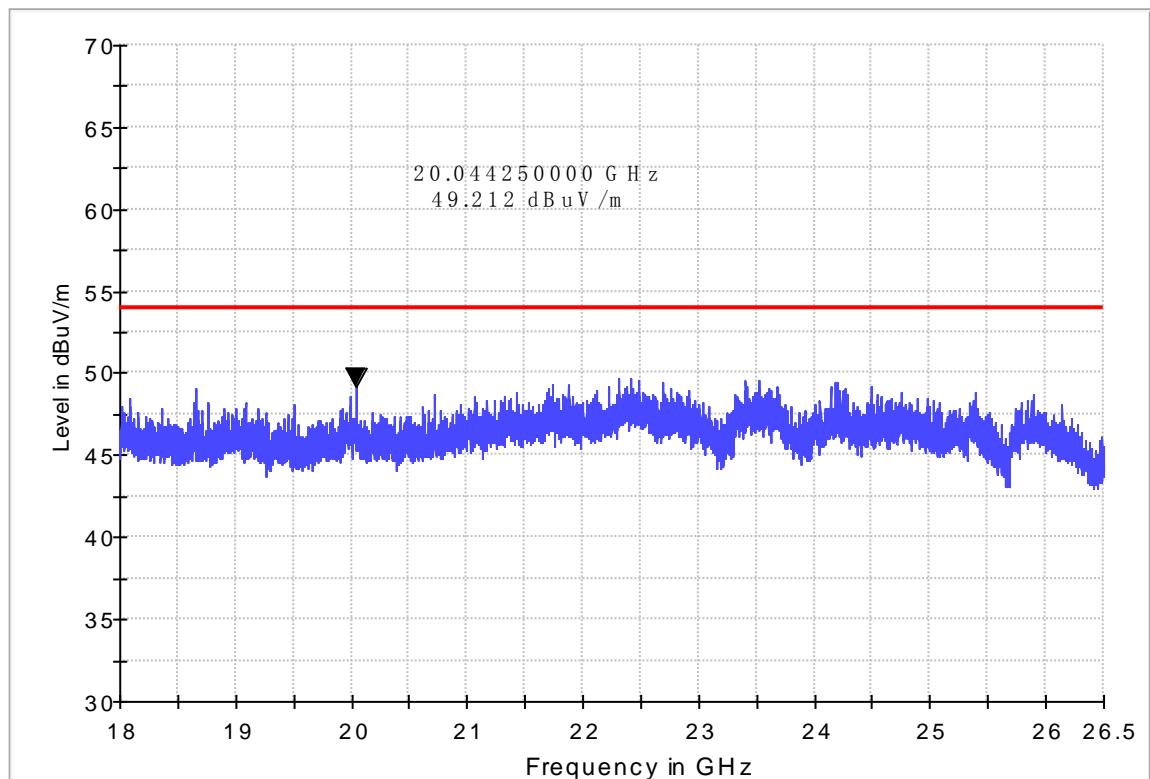


Table 8 Restricted Band Radiated Emission Data

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	
6.31175 - 6.31225	123 - 138	2200 - 2300	
8.291 - 8.294	149.9 - 150.05	2310 - 2390	
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	
8.37625 - 8.38675	156.7 - 156.9	2655 - 2900	
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	
12.29 - 12.293	167.72 - 173.2	3332 - 3339	
12.51975	-	3345.8 - 3358	
12.52025	240 - 285	3600 - 4400	
12.57675	-		
12.57725			
13.36 - 13.41			

Except as shown in table 9 to table 15, all other emission of the above band were less than the limit 20dB.

6. 20DB BANDWIDTH MEASUREMENT

6.1. LIMITS OF 20dB BANDWIDTH MEASUREMENT

CFR 47 (FCC) part 15.247 (a) (1) and DA 00-705

6.2. TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 30kHz RBW and $VBW \geq RBW$. The 20dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 20dB.




6.3. TEST SETUP



6.4. Test Data

Table 9 20dB Bandwidth Test Data Modulation: GFSK

CHANNEL FREQUENCY (MHz)	20dB BANDWIDTH (MHz)	results
2402	0.9455	Pass
2441	0.9415	Pass
2480	0.9455	Pass

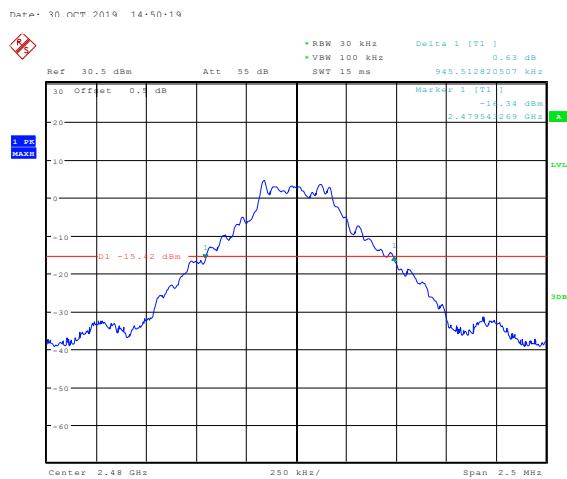
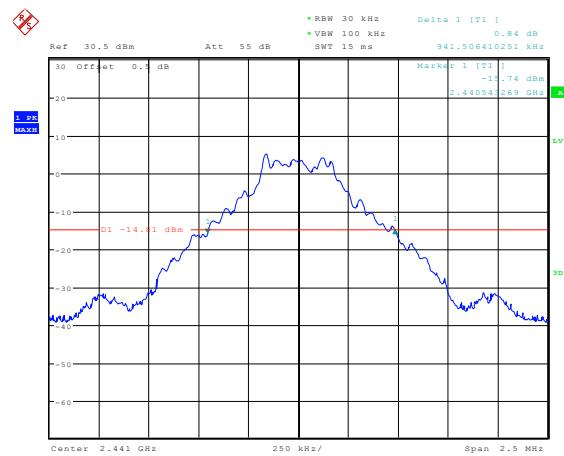
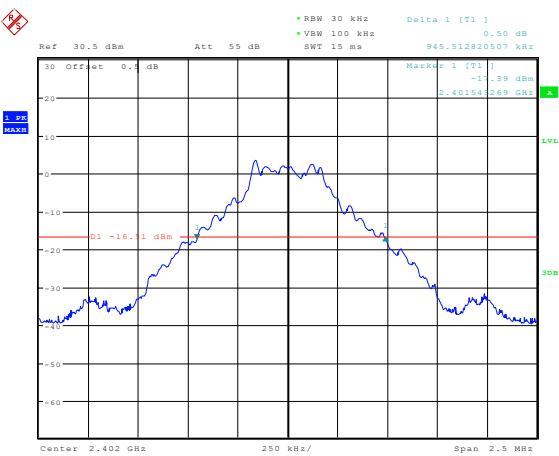


Date: 30.OCT.2019 14:50:19

Date: 30.OCT.2019 14:52:00

Table 10 20dB Bandwidth Test Data Modulation: 8DPSK

CHANNEL FREQUENCY (MHz)	20dB BANDWIDTH (MHz)	results
2402	1.2780	Pass
2441	1.2740	Pass
2480	1.2780	Pass

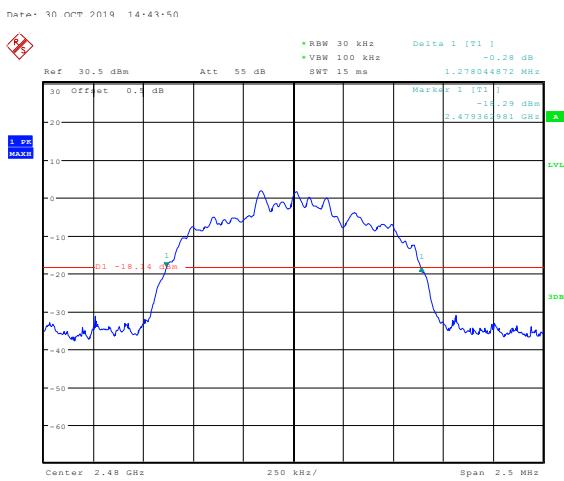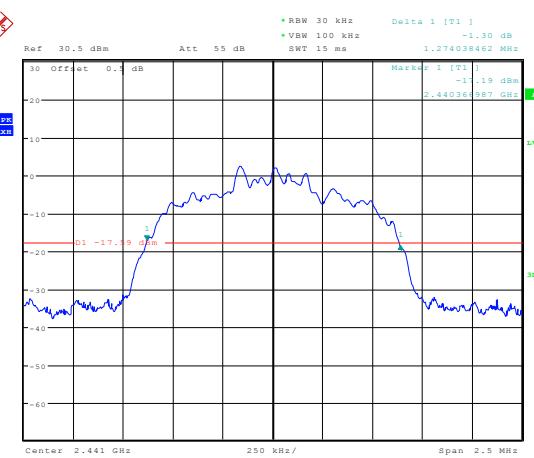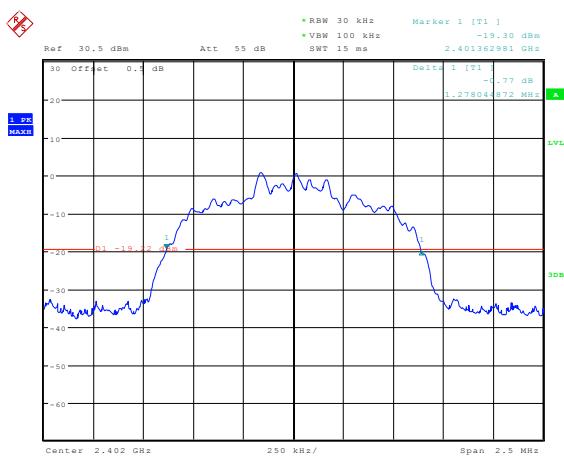

Date: 30.OCT.2019 14:48:06

7. CARRIER FREQUENCY SEPARATION MEASUREMENT

7.1. LIMITS OF CARRIER FREQUENCY SEPARATION MEASUREMENT

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater.

7.2. TEST PROCEDURES

- (a) Connect test port of EUT to spectrum analyzer and universal communication tester.
- (b) Set the EUT to transmit maximum output power at 2.4GHz and switch off frequency hopping function, then set the measured frequency number to two adjacent channels separately and test the carrier frequency separation with spectrum analyzer.

7.3. TEST SETUP






7.4. Test Data

BDR

Table 13 Carrier Frequencies Separation

Frequency [GHz]	Frequency [GHz]	frequency separation [MHz]	Limit [MHz]	Result
2.402	2.403	1.003	0.625	Pass
2.441	2.442	1.000	0.625	Pass
2.479	2.480	1.000	0.625	Pass

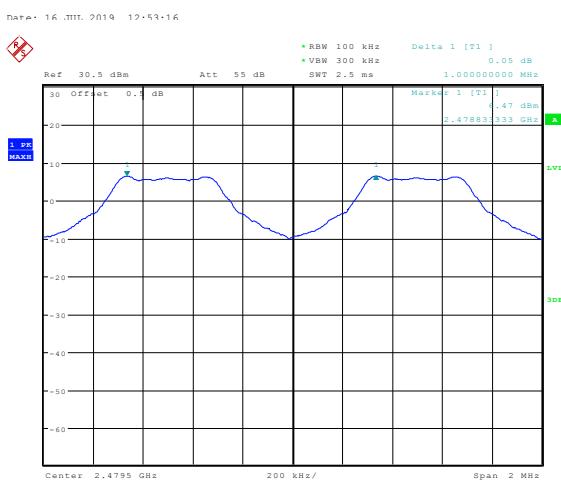
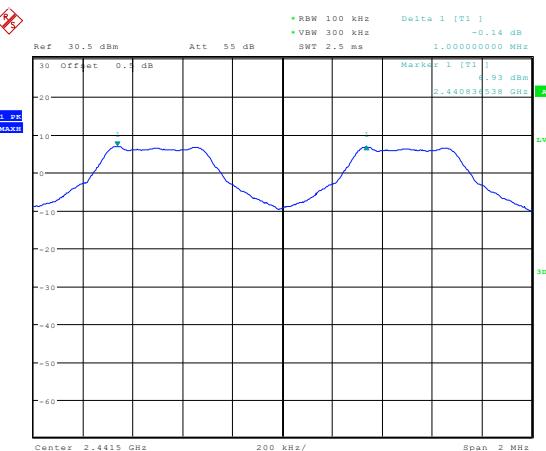
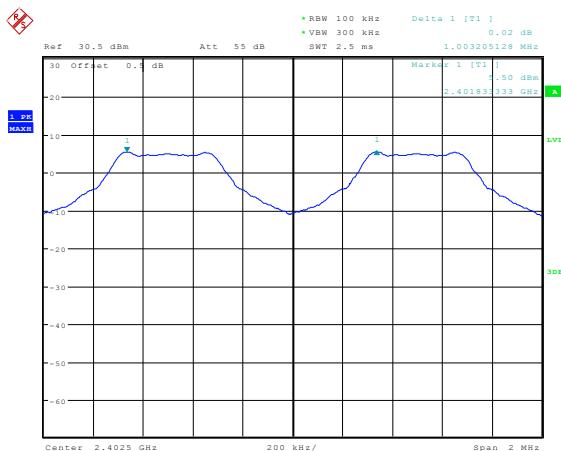


Date: 16.JUL.2019 12:56:24

EDR

Table 14 Carrier Frequencies Separation

Frequency [GHz]	Frequency [GHz]	frequency separation [MHz]	Limit [MHz]	Result
2.402	2.403	1.010	0.845	Pass
2.441	2.442	1.003	0.845	Pass
2.479	2.480	1.003	0.845	Pass

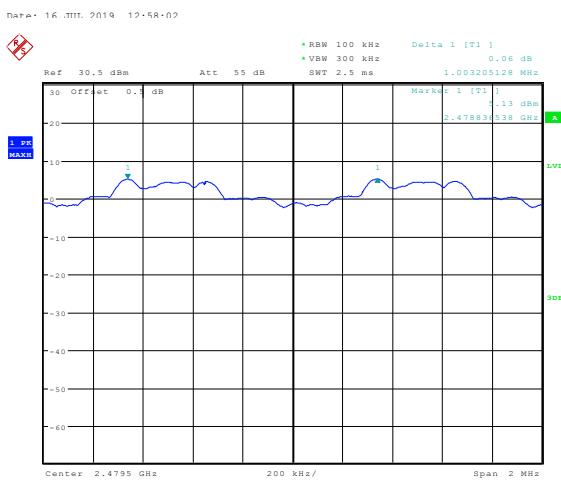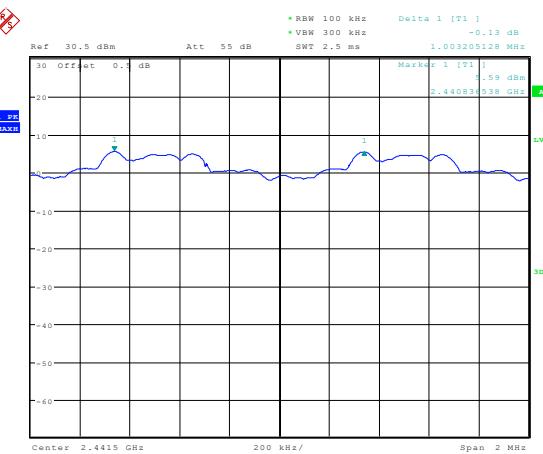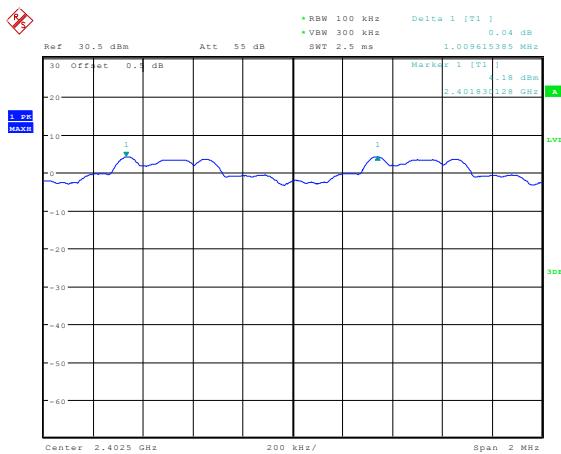

Date: 16.JUL.2019 13:00:45

8. NUMBER OF HOPPING CHANNEL


8.1. LIMITS OF NUMBER OF HOPPING CHANNEL

Number of hopping channel should be compliance with the requirements in part15.247 (a) (1) III.

8.2. TEST PROCEDURE

- (a) Connect test port of EUT to spectrum analyzer
- (b) Set the EUT to transmit maximum output power at 2.4GHz and switch on Frequency hopping function, then set enough count time (larger than 5000 times) to get all the hopping frequency channel displayed on the screen of spectrum analyzer.
- (c) Count the quantity of peaks to get the number of hopping channels.

8.3. TEST SETUP

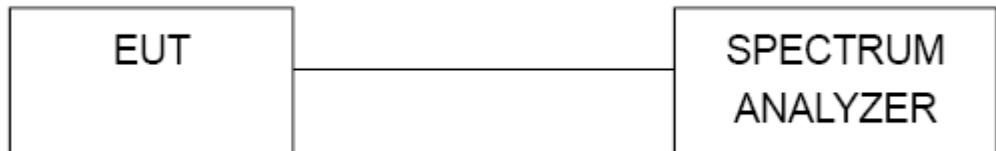


8.4. Test Data


Table 14 Hopping Channel Number Test Data

Hopping numbers	LIMIT	results
79	>15	Pass

BDR

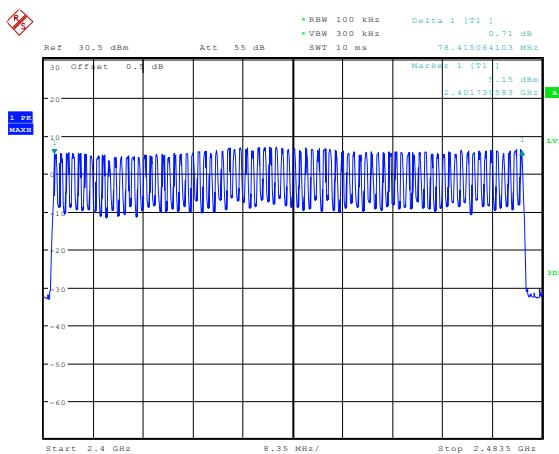

EDR

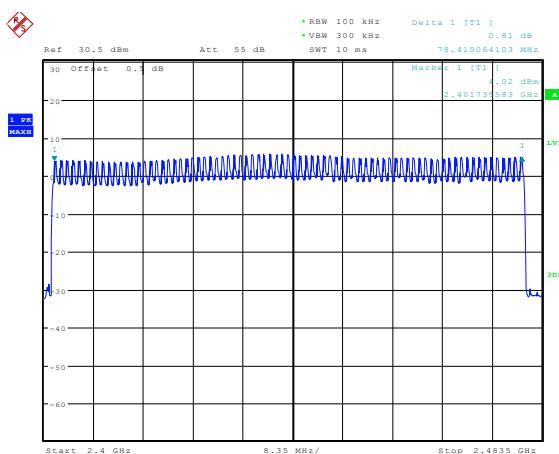

9. TIME OF OCCUPANCY

9.1. LIMITS OF TIME OF OCCUPANCY

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

9.2. TEST PROCEDURE

- (a) Connect test port of EUT to spectrum analyzer and universal communication tester.
- (b) Set the EUT to transmit maximum output power at 2.4GHz and switch on frequency hopping function.
- (c) Set the span of spectrum analyzer to 0 Hz, and set the resolution bandwidth to 1 MHz and the video bandwidth to 1 MHz, then get the time domain measured diagram. and set sweep time to 2 times of one burst occupancy time, and measure the time of occupancy of one burst.
- (d) Set the resolution bandwidth to 1 MHz and the video bandwidth to 3 MHz ,and set the sweep time to a period (0.4 seconds multiplied by the number of hopping channels employed), and count the number of the bursts.
- (e) Calculate the time of occupancy in a period with time occupancy of a burst and quantity of bursts.

DH1: Dwell time equal to Pluse time (ms)*(1600/2/79)*31.6ms

DH3: Dwell time equal to Pluse time (ms)*(1600/4/79)*31.6ms

DH5: Dwell time equal to Pluse time (ms)*(1600/6/79)*31.6ms

AFH Mode:

DH1: Dwell time equal to Pluse time (ms)*(800/2/20)* (0.4*20) ms

DH3: Dwell time equal to Pluse time (ms)*(800/4/20)* (0.4*20) ms

DH5: Dwell time equal to Pluse time (ms)*(800/6/20)* (0.4*20) ms



9.3. TEST RESULTS

GFSK

Table 15 Time of Occupancy

Data Packet	Time of Single Slot [ms]	Numbers of slots in a period	Time of occupied in a period [s]	AFH Mode Time occupied in a period [s]	Limit [s]	Result
DH1	0.424	32	0.1357	0.0679	≤ 0.4	Pass
DH3	1.660	24	0.3984	0.1992	≤ 0.4	Pass
DH5	2.910	5	0.1455	0.0728	≤ 0.4	Pass



DH1

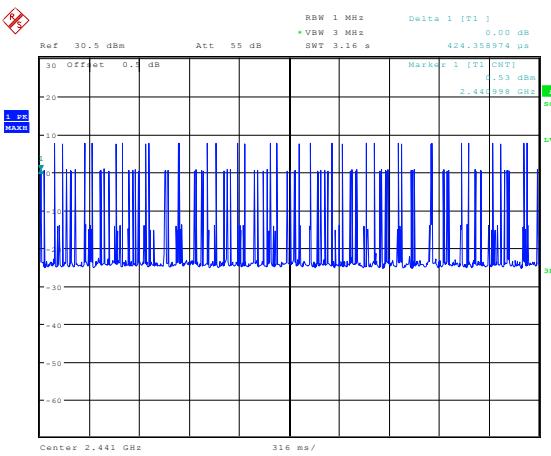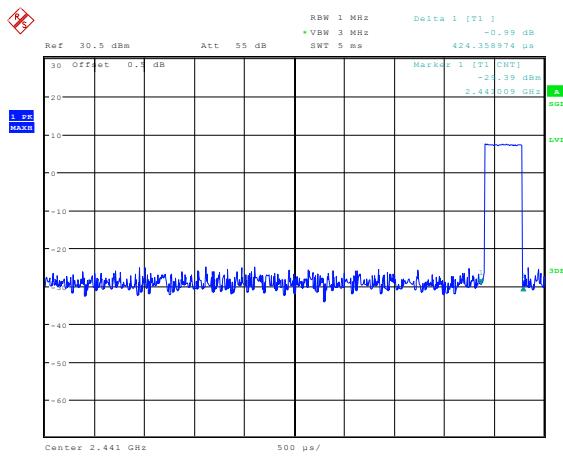

Date: 16.JUL.2019 16:07:30

Date: 16.JUL.2019 16:08:06


DH3

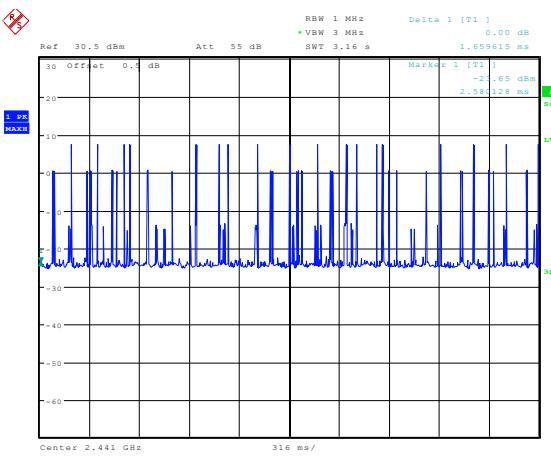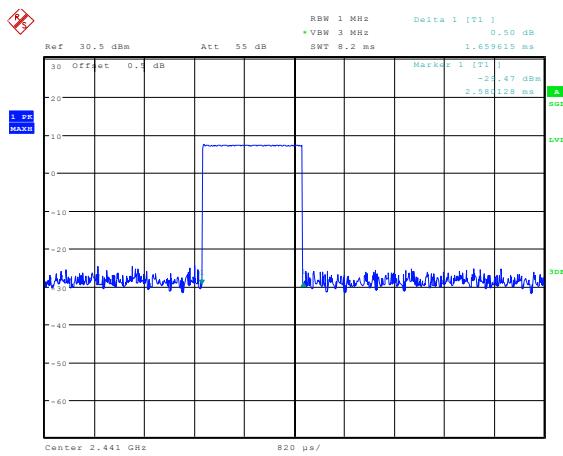

Date: 16.JUL.2019 16:11:36

Date: 16.JUL.2019 16:12:24

DH5

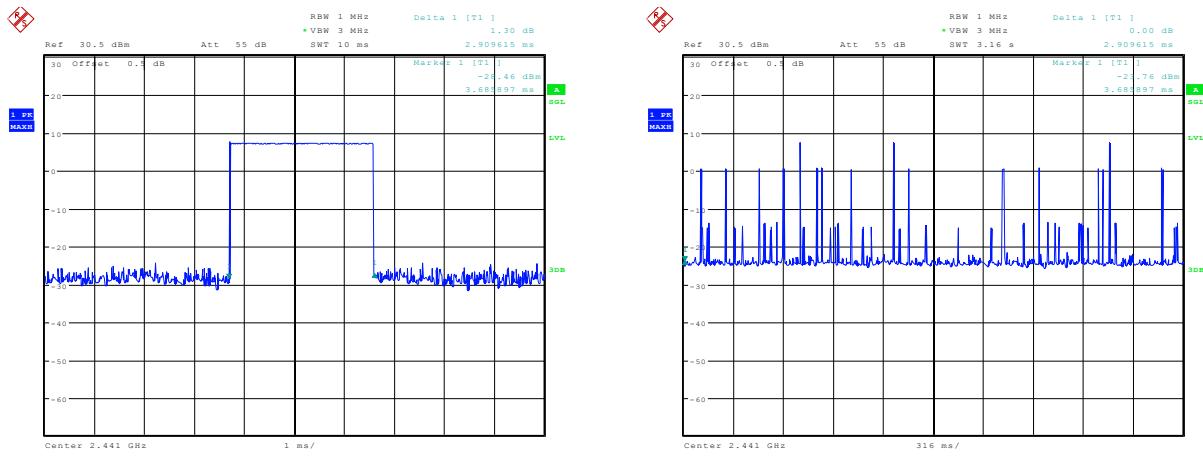

Date: 16.JUL.2019 16:13:37



Date: 16.JUL.2019 16:14:31

8DPSK

Table 16 Time of Occupancy

Data Packet	Time of Single Slot [ms]	Numbers of slots in a period	Time of occupied in a period [s]	AFH Mode Time occupied in a period [s]	Limit [s]	Result
3-DH1	0.442	33	0.1459	0.0730	≤ 0.4	Pass
3-DH3	1.692	18	0.3046	0.1523	≤ 0.4	Pass
3-DH5	2.942	7	0.2059	0.1030	≤ 0.4	Pass



3-DH1

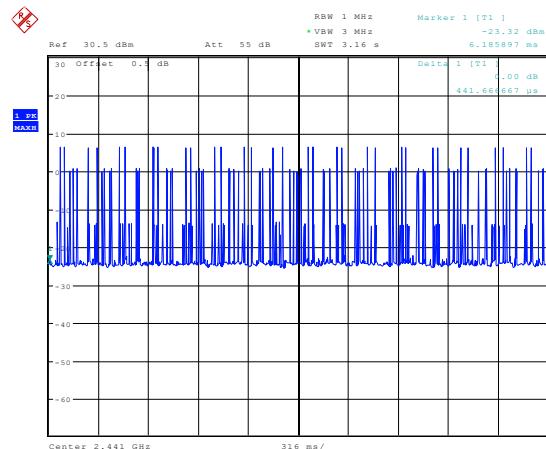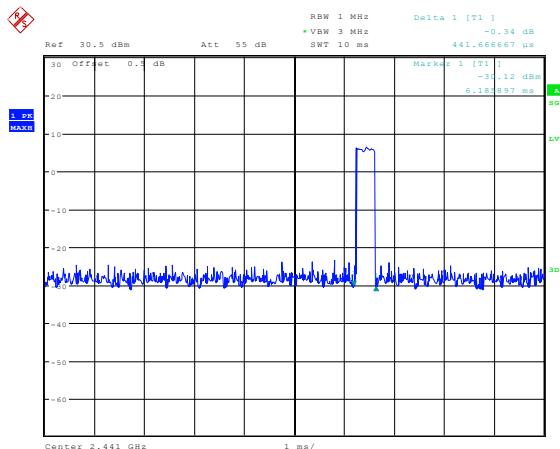

Date: 16.III.2019 16:15:55

Date: 16.III.2019 16:16:36


3-DH3

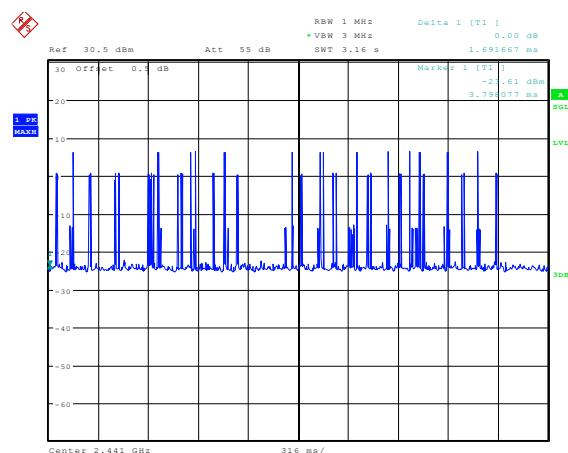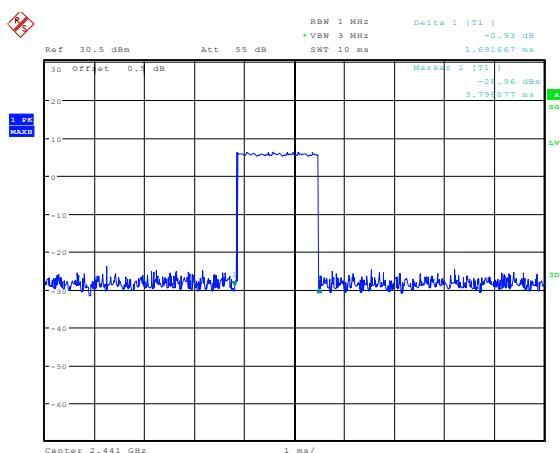

Date: 16.JUL.2019 16:17:45

Date: 16.JUL.2019 16:18:20

3-DH5

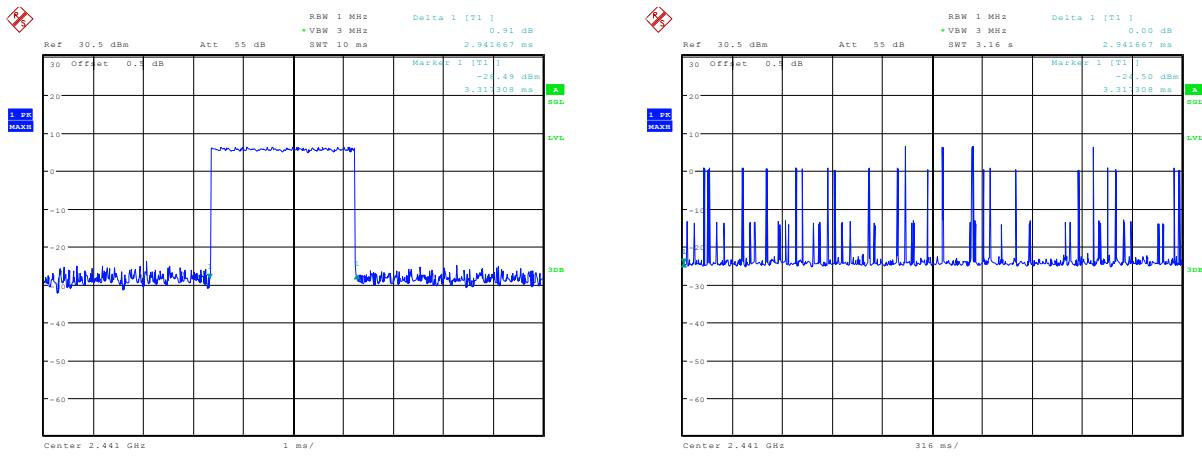

10. PEAK POWER

10.1. LIMITS OF Peak Power

Compliance with part 15.247 (b) (1), for frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt.

For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watt.

10.2. TEST PROCEDURE




- (a) Connect test port of EUT to universal communication tester.
- (b) Set the EUT to transmit maximum output power at 2.4GHz and switch off frequency hopping function.
- (c) Then set the EUT to transmit at high, middle and low frequency and measure the conducted output power separately.

10.3. TEST RESULTS

BDR

Table 17 Peak Power Test Data

Channel	Channel No.	Center Freq. [MHz]	Meas. Level (Cond.) [dBm]	Limit [dBm]	Result
Bottom	0	2402	6.52	< 21	Pass
Middle	39	2441	7.99	< 21	Pass
Top	78	2480	7.58	< 21	Pass

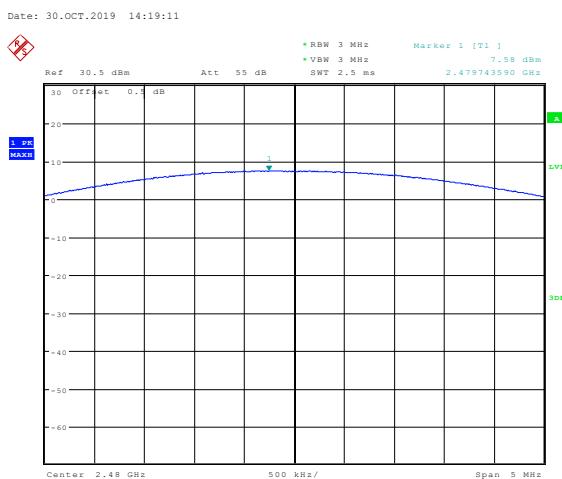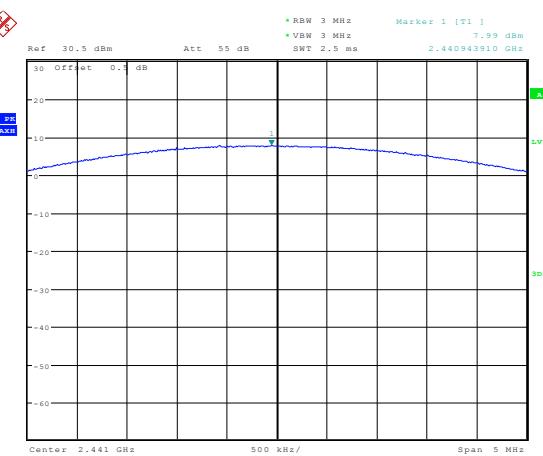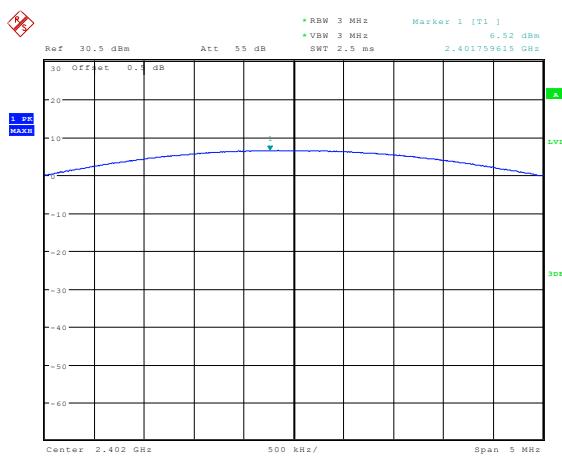




Date: 30.OCT.2019 14:19:11

Date: 30.OCT.2019 14:35:02

EDR

Table 18 Peak Power Test Data

Channel	Channel No.	Center Freq. [MHz]	Meas. Level (Cond.) [dBm]	Limit [dBm]	Result
Bottom	0	2402	5.58	< 21	Pass
Middle	39	2441	7.00	< 21	Pass
Top	78	2480	6.64	< 21	Pass

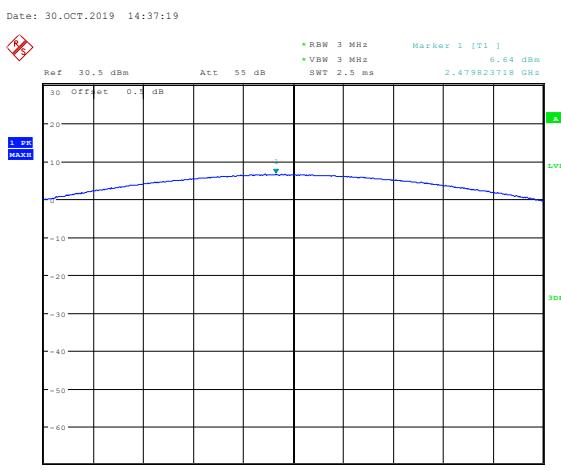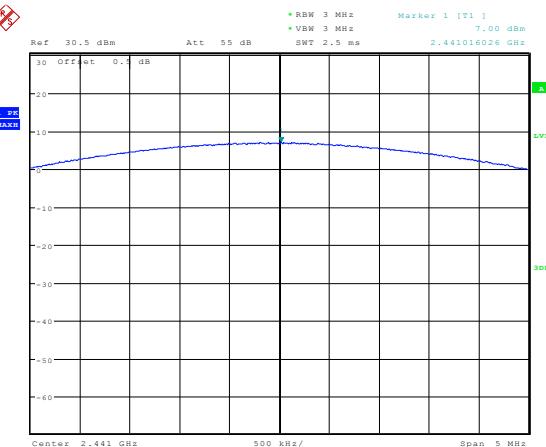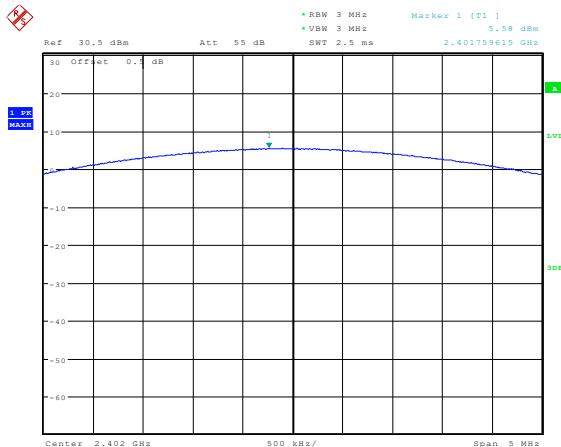

Date: 30.OCT.2019 14:37:19

Date: 30.OCT.2019 14:38:55

Date: 30.OCT.2019 14:39:15

11. BAND EDGES MEASUREMENT

11.1. Limits of Band Edges Measurement

Below –20dB of the highest emission level of operating band (in 100kHz resolution bandwidth).

11.2. TEST PROCEDURE

1. The EUT is placed on a turntable, which is 1.5m above the ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emission.
4. Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission:
 - (a) PEAK: RBW=VBW=1MHz / Sweep=AUTO
 - (b) AVERAGE: RBW=1MHz / VBW=10Hz / Sweep=AUTO
5. Repeat the procedures until all the PEAK and AVERAGE versus POLARIZATION are measured.



11.3. Test Results

The measured plots are attached on the following. Test data shows compliance with the band edge requirement in part 15.247(d).



Bluetooth Basic Rate

Low edge

Horizontal

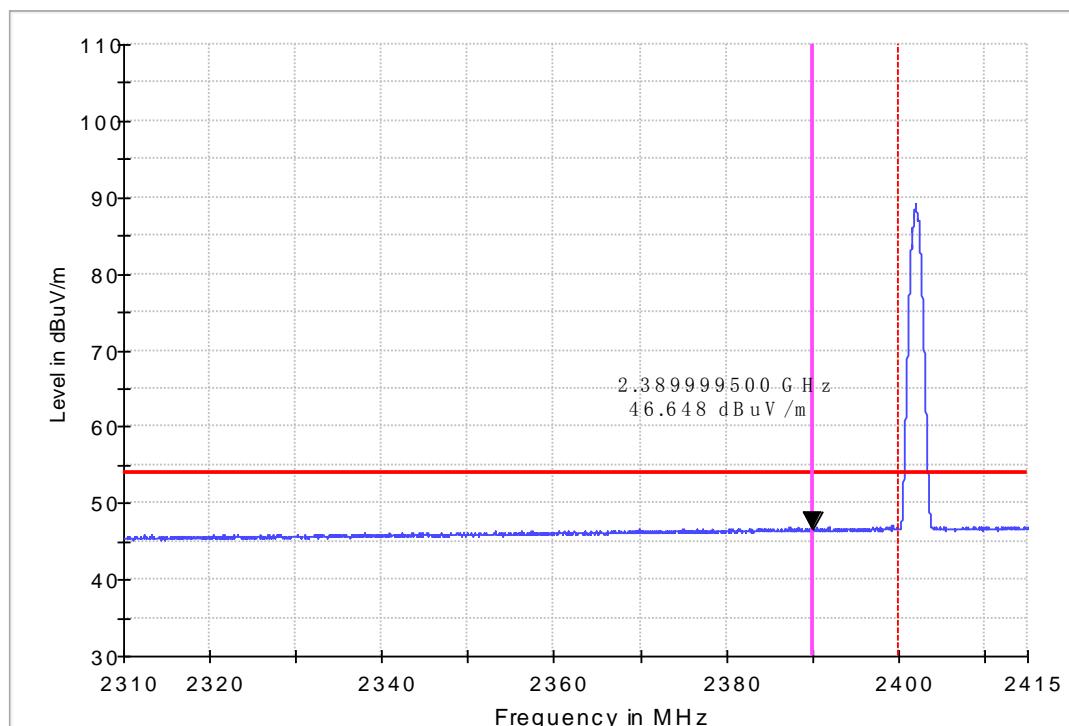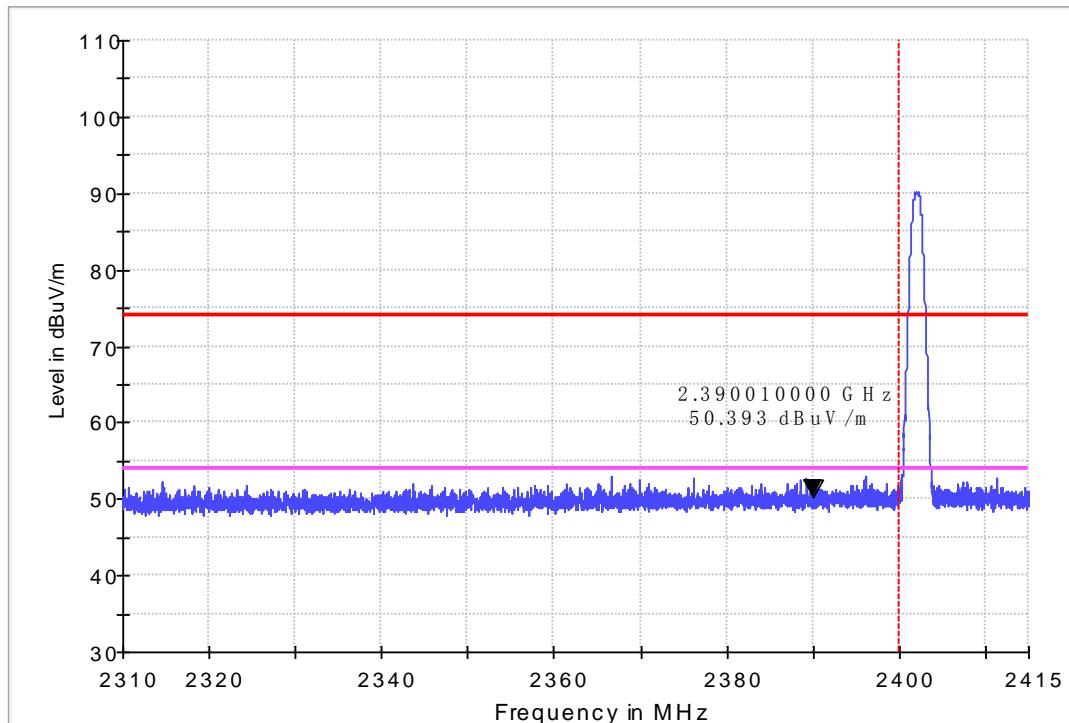



Vertical

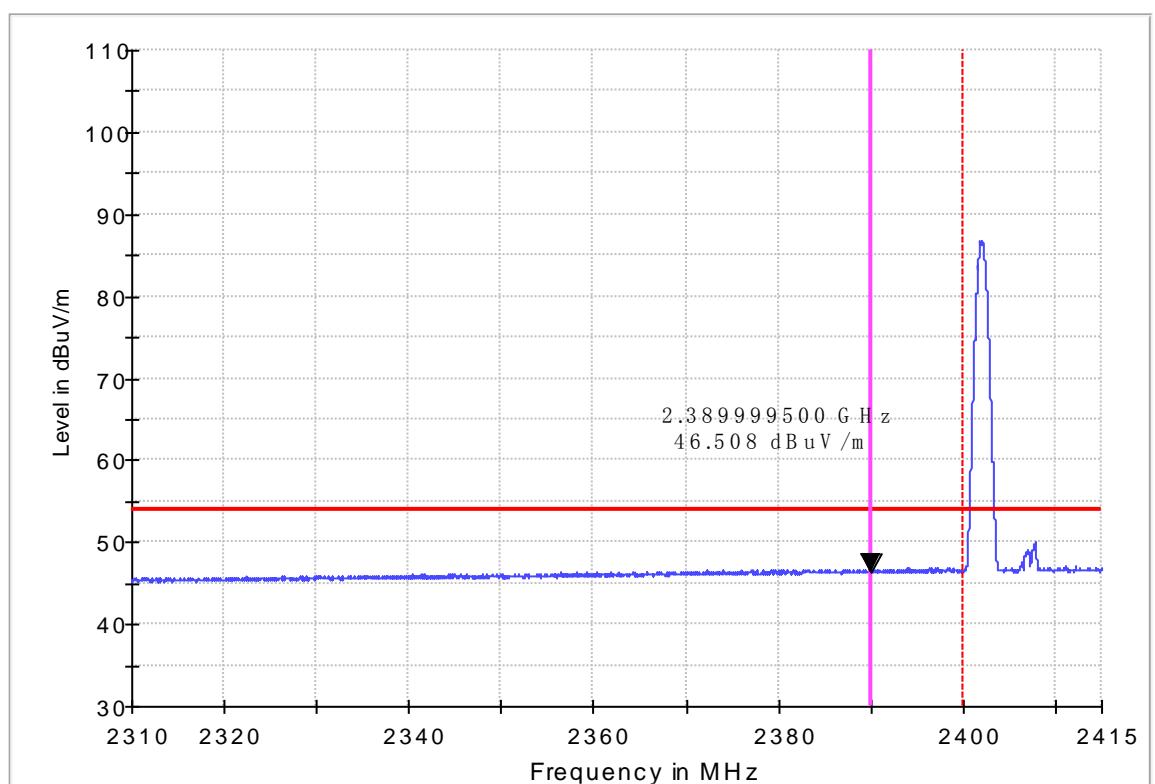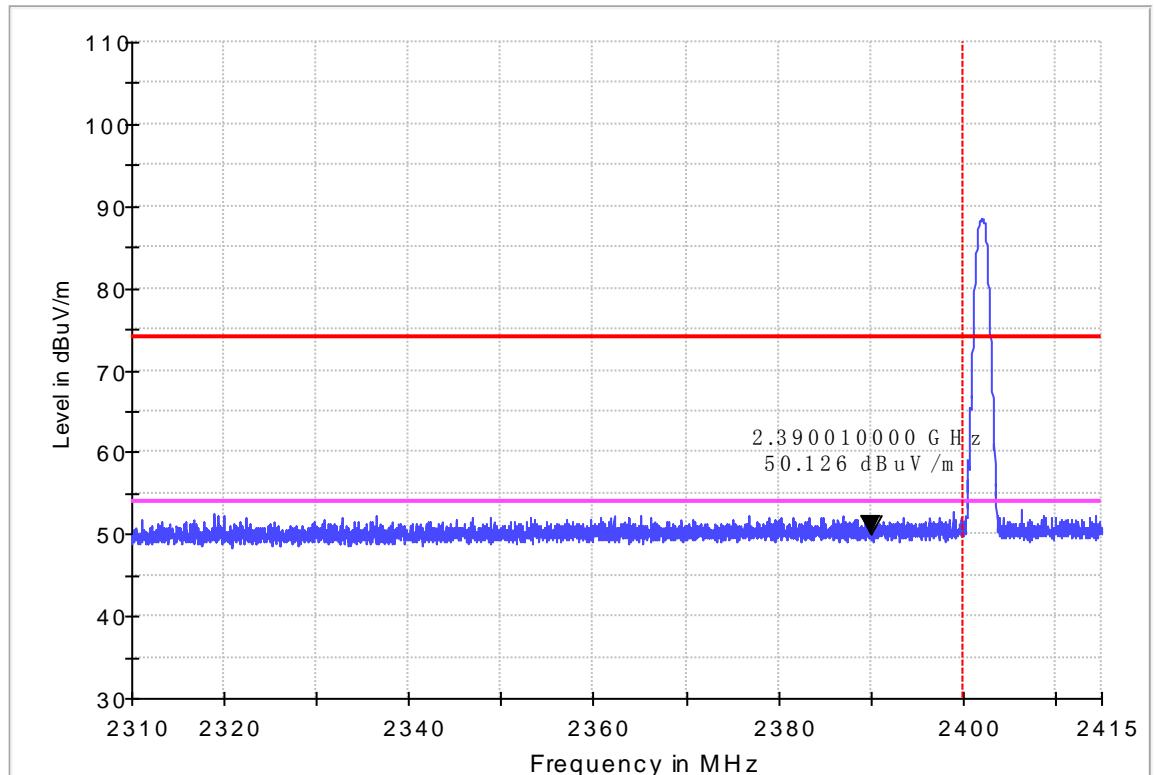



Bluetooth Basic Rate

Upper Edge

Horizontal

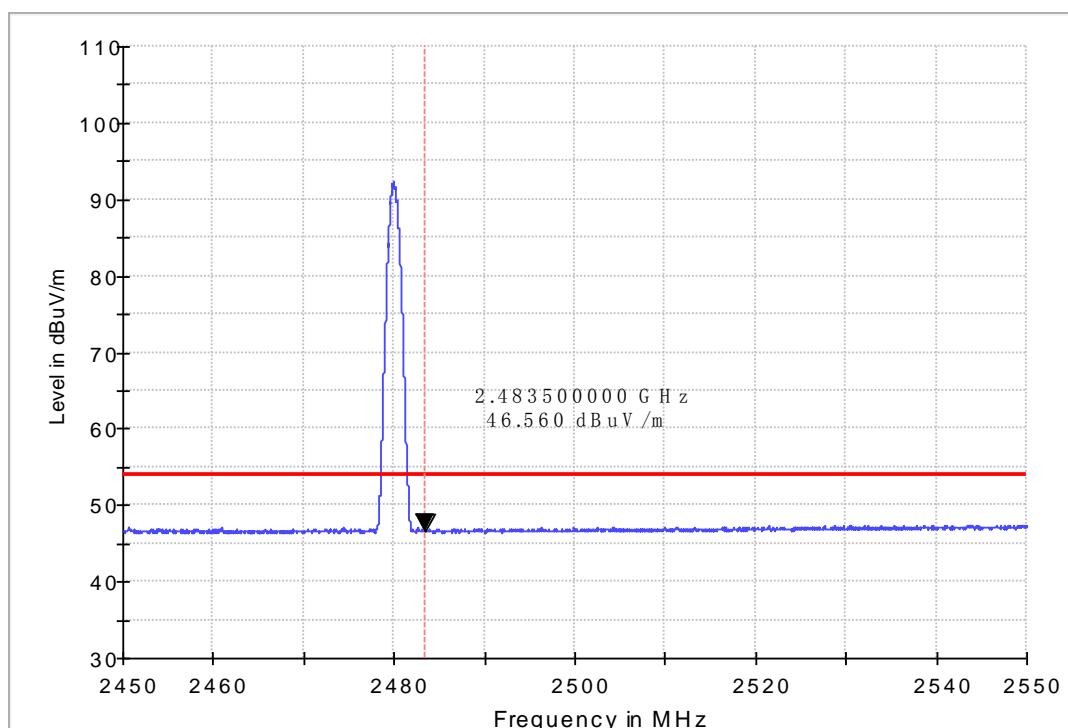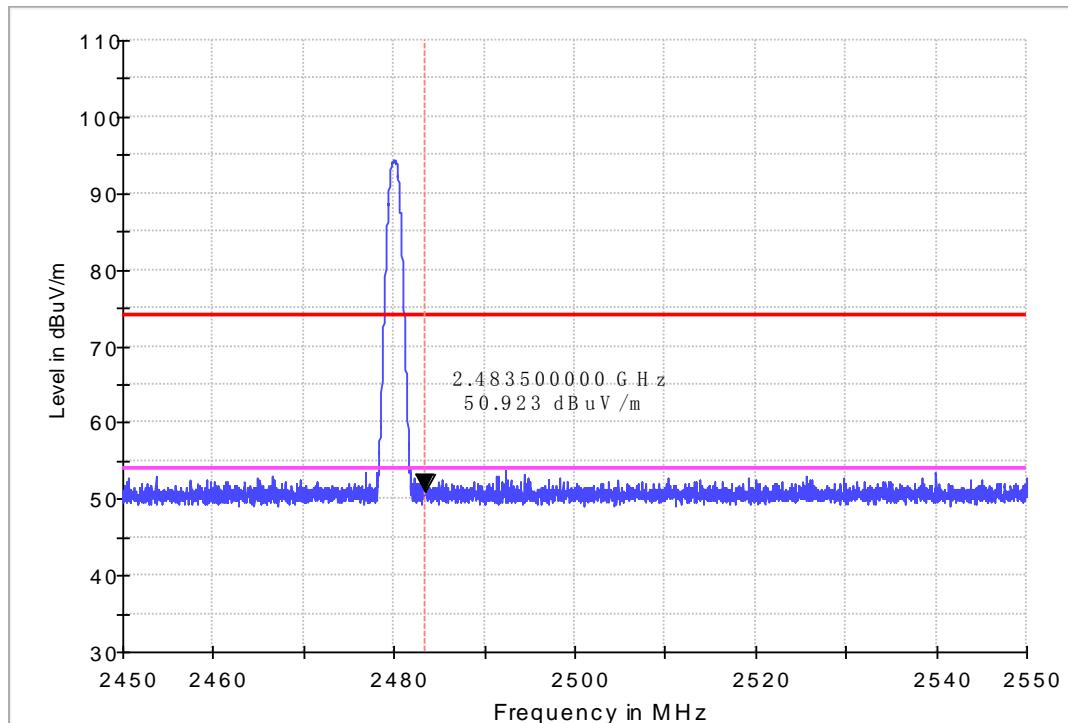



Vertical

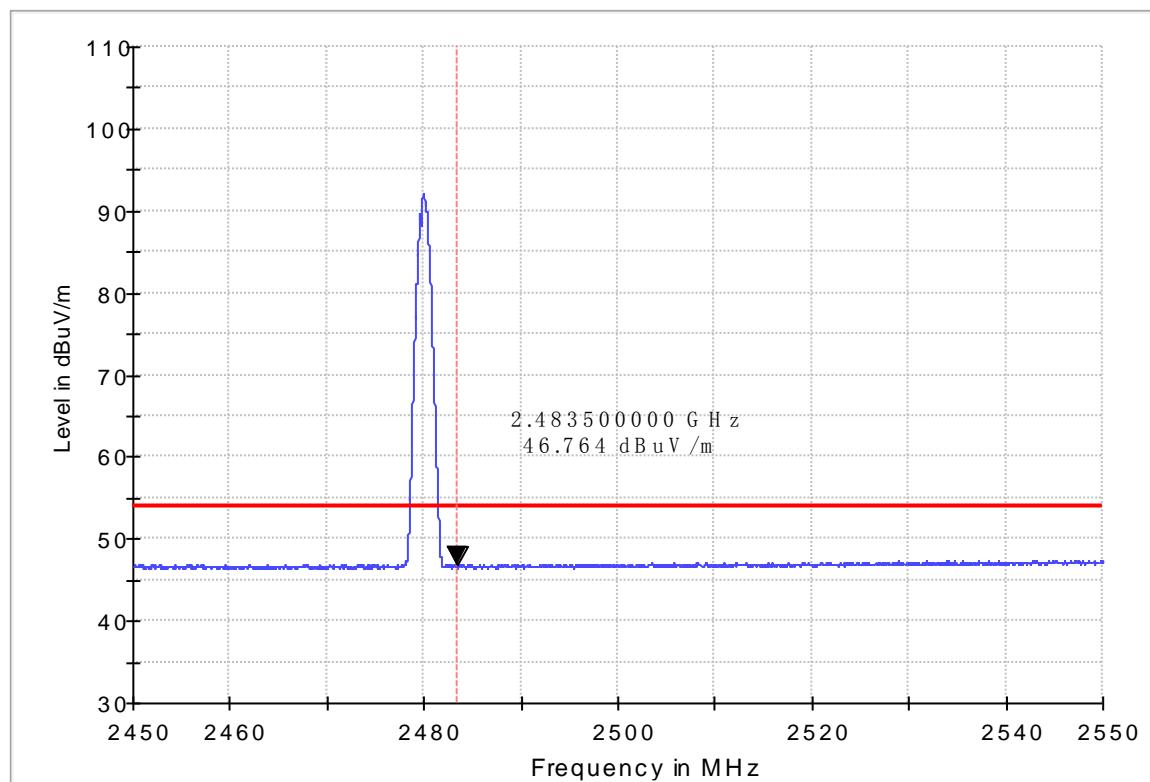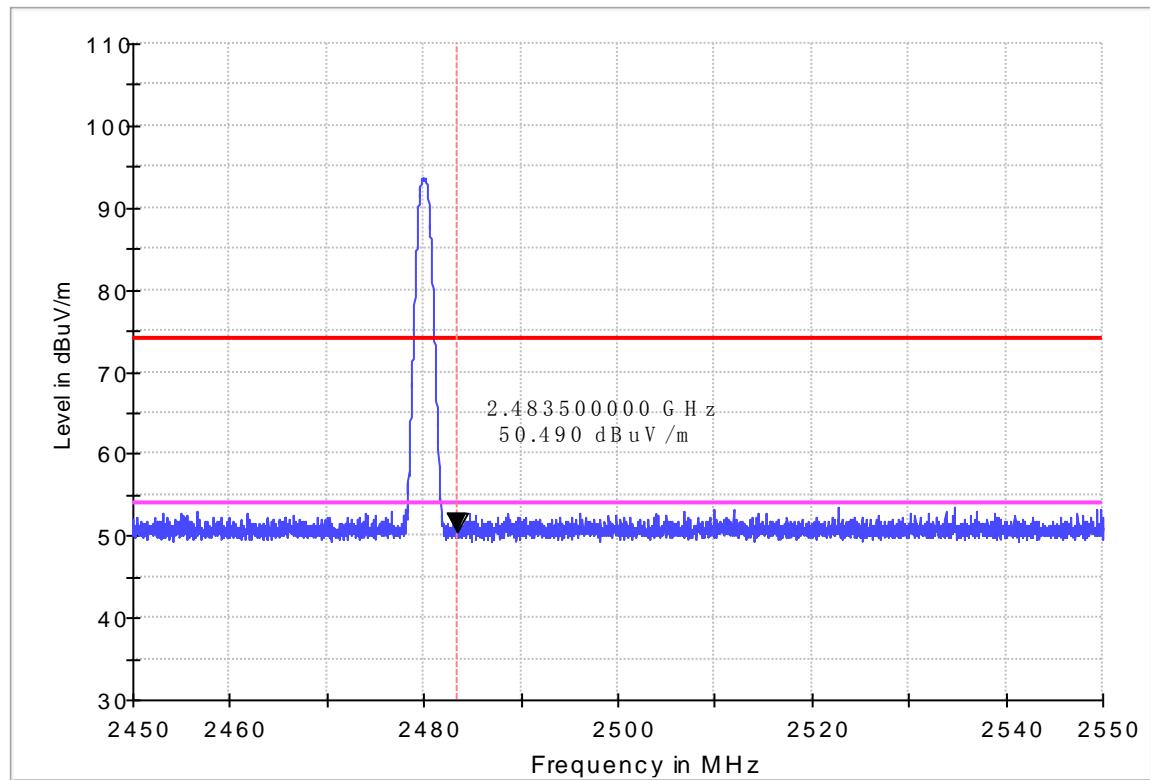



Bluetooth EDR

Low edge

Horizontal

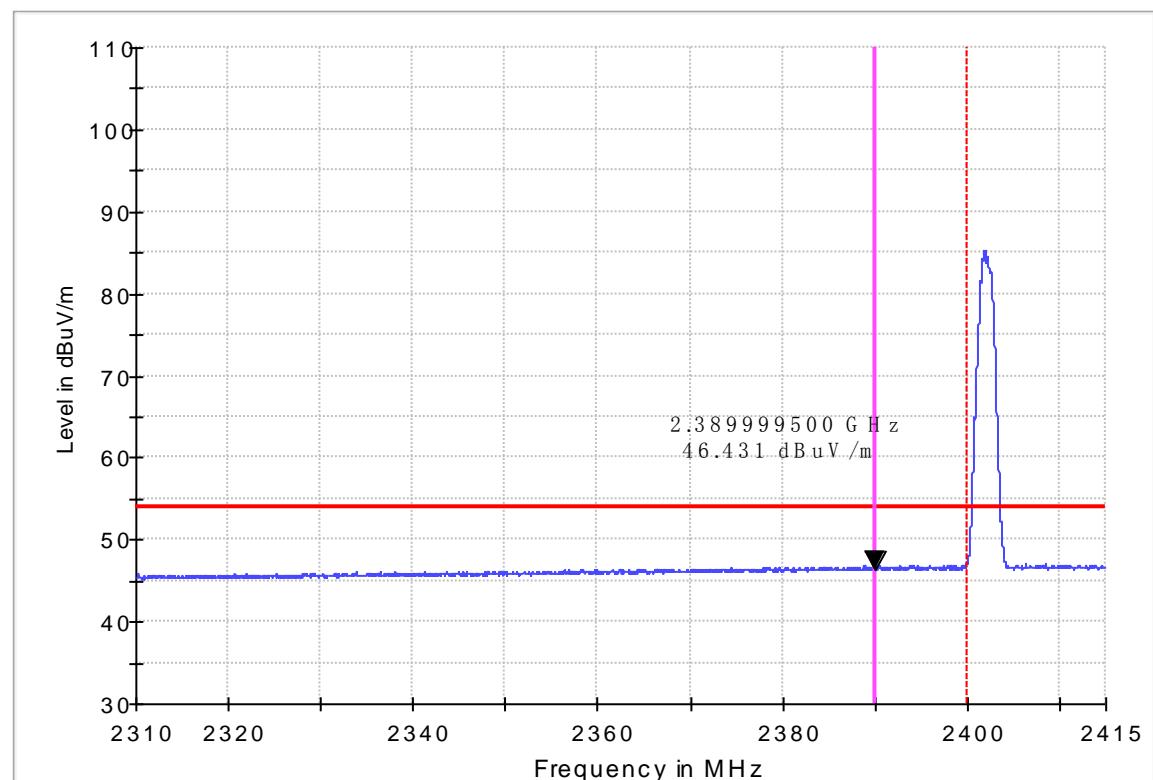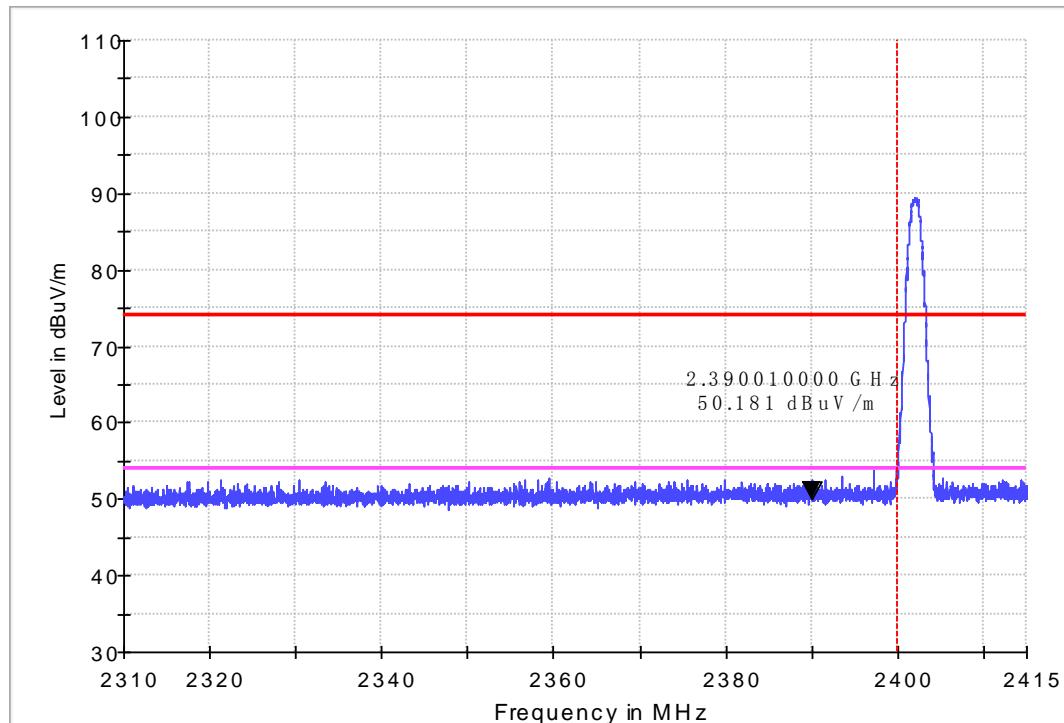



Vertical

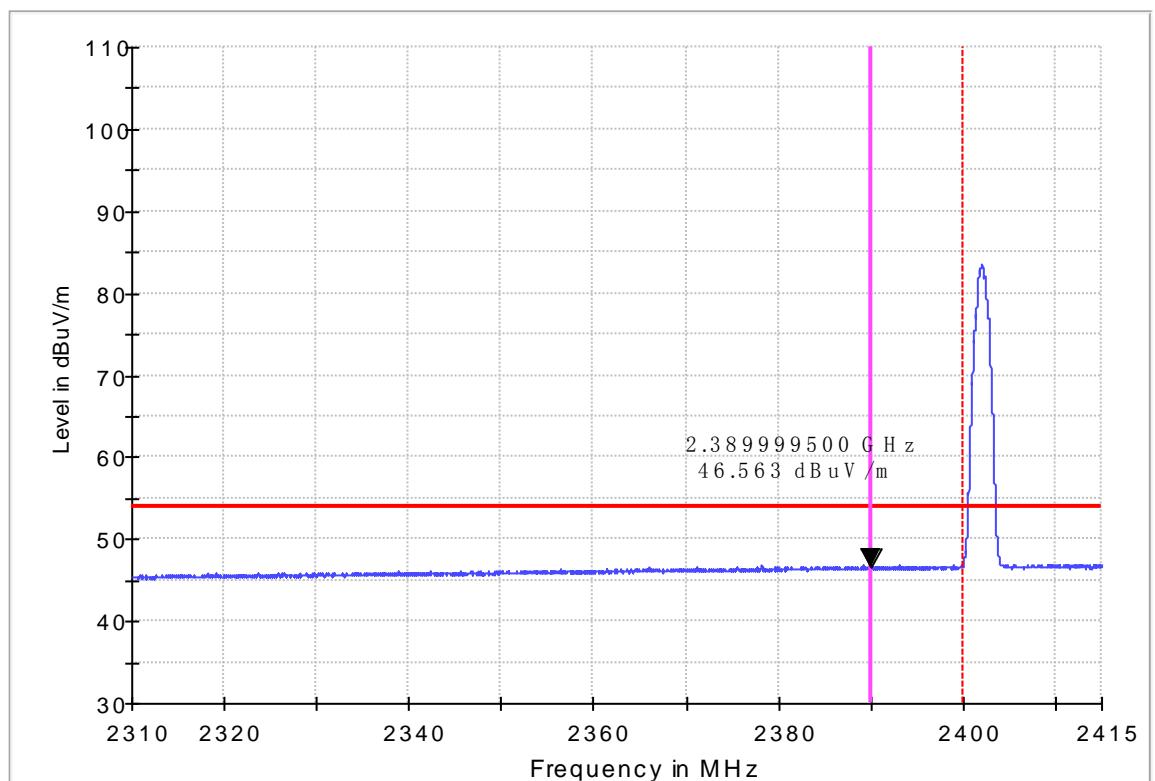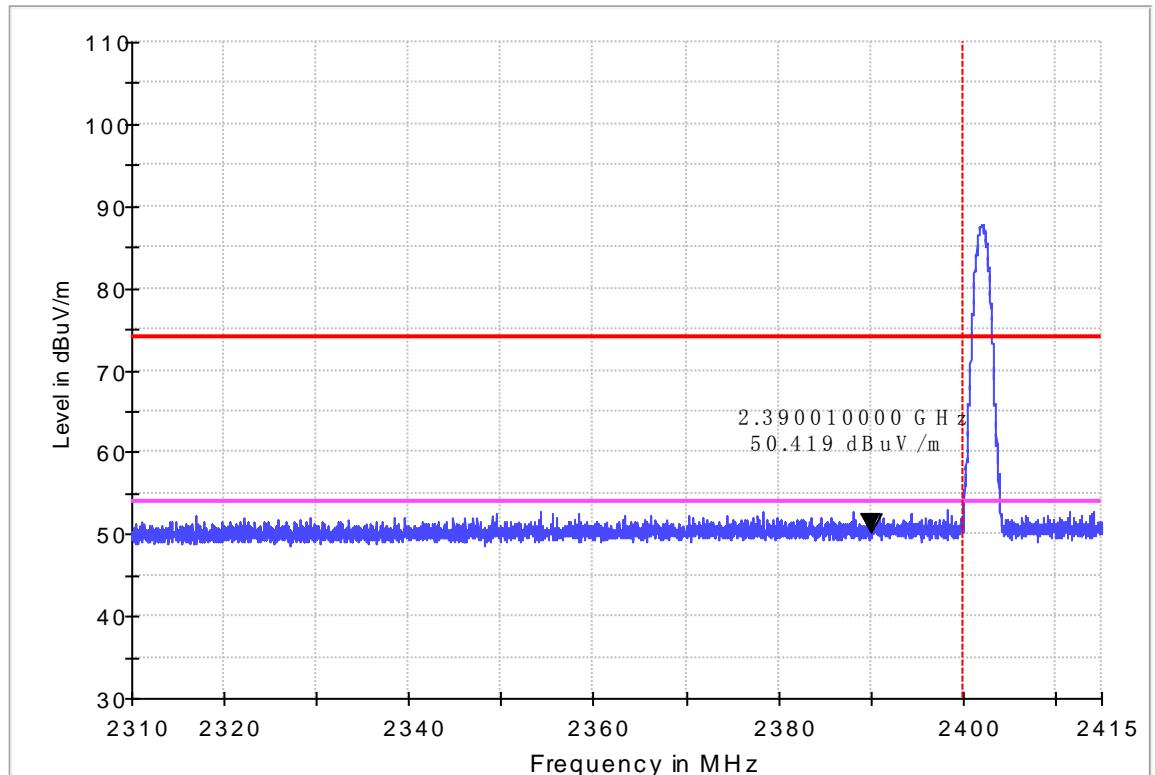



Bluetooth EDR

Upper edge

Horizontal

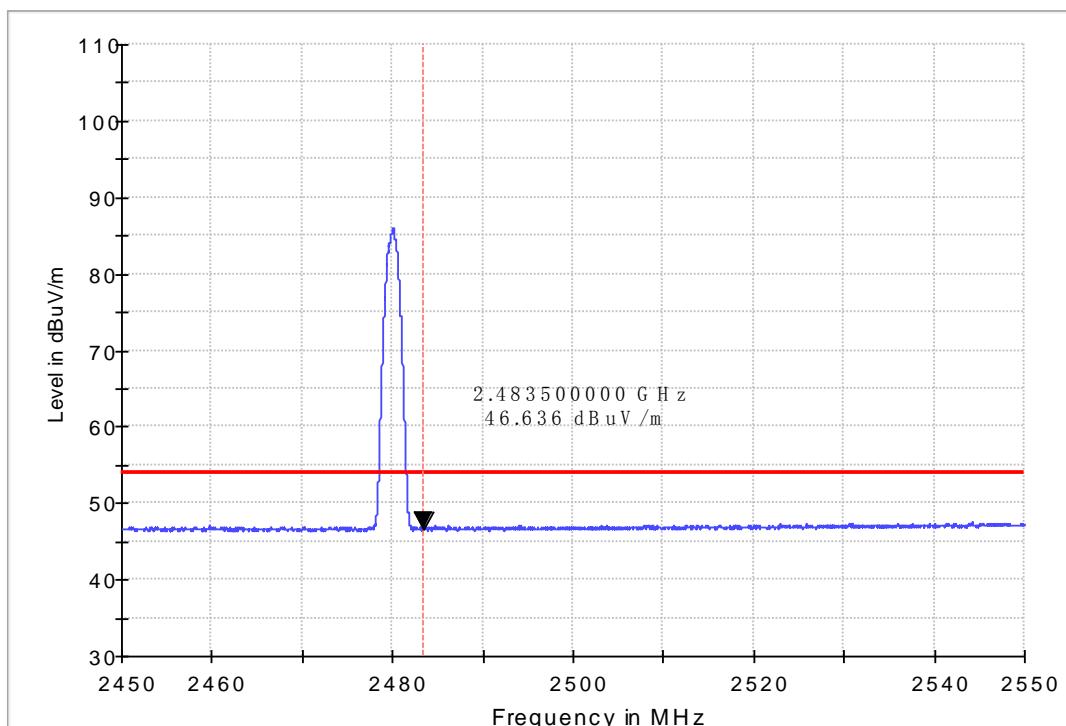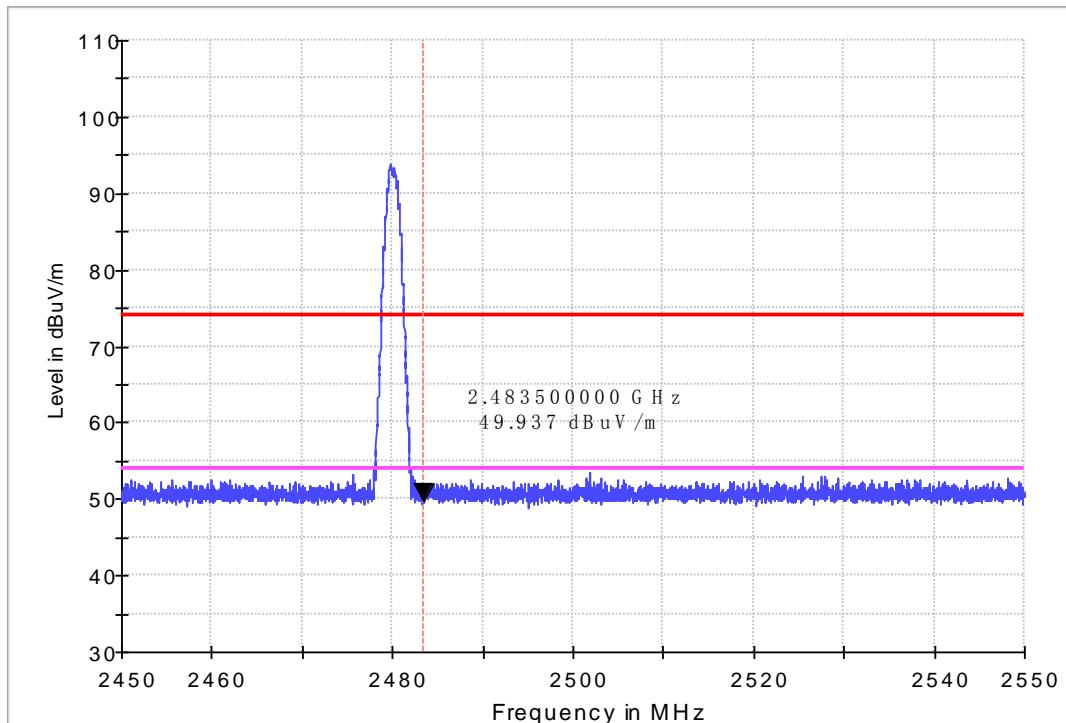

Vertical

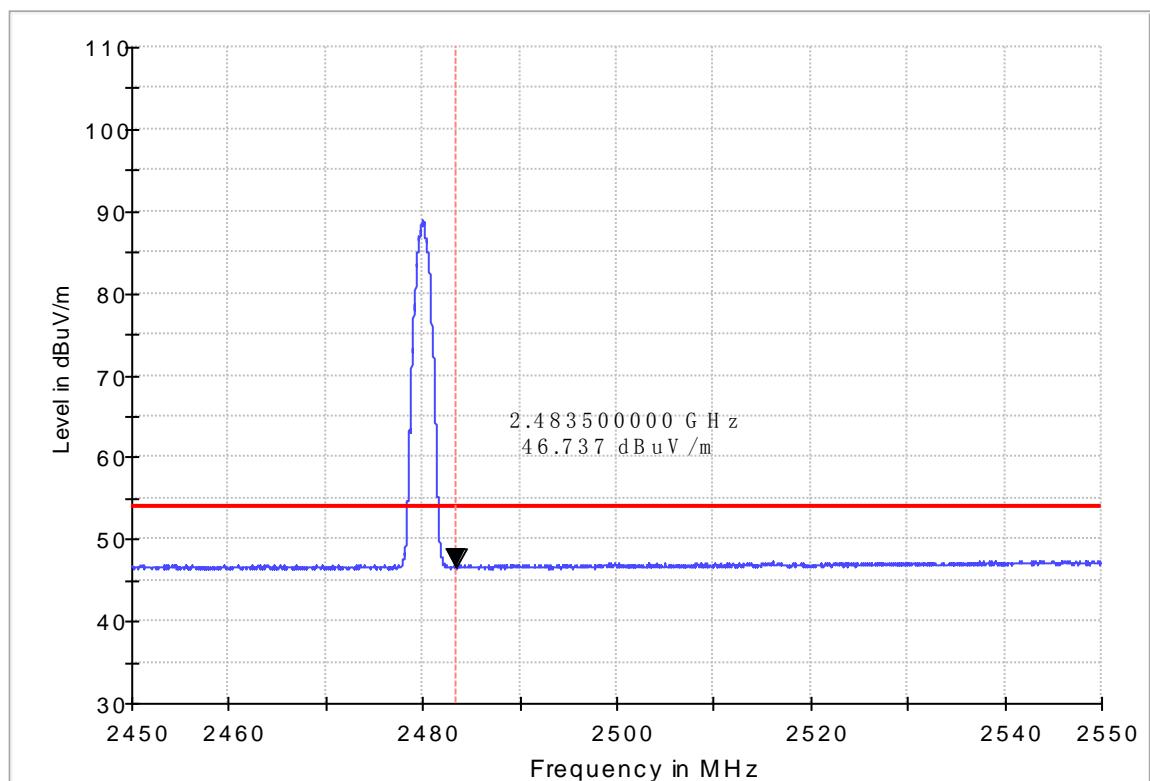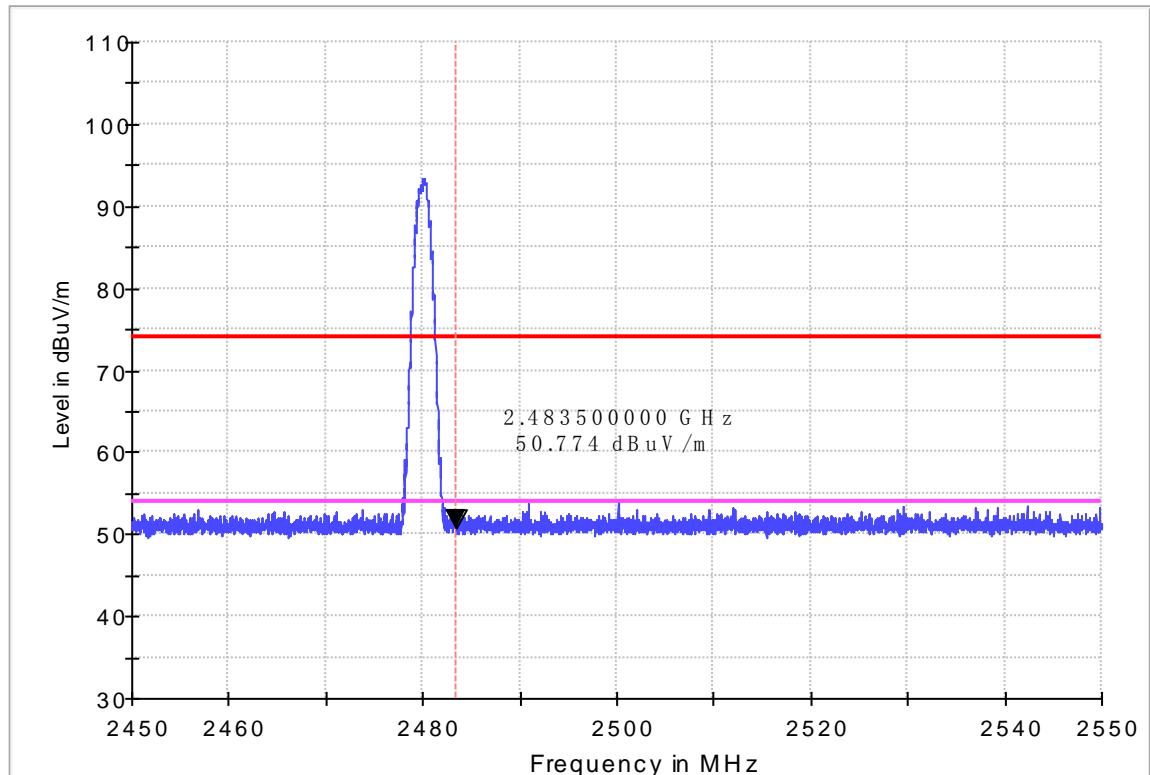

12. CONDUCTED SPURIOUS EMISSIONS

12.1. Limits of Band Edges Measurement

Below –20dB of the highest emission level of operating band (in 100 kHz resolution bandwidth).

12.2. Test Procedure

The transmitter output was connected to the spectrum analyzer.

The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 300 kHz.


The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels.

The bandedges at 2.4 and 2.4835 GHz are investigated with the transmitter set to the normal

12.3. TEST RESULTS


Bluetooth Basic

Low channel

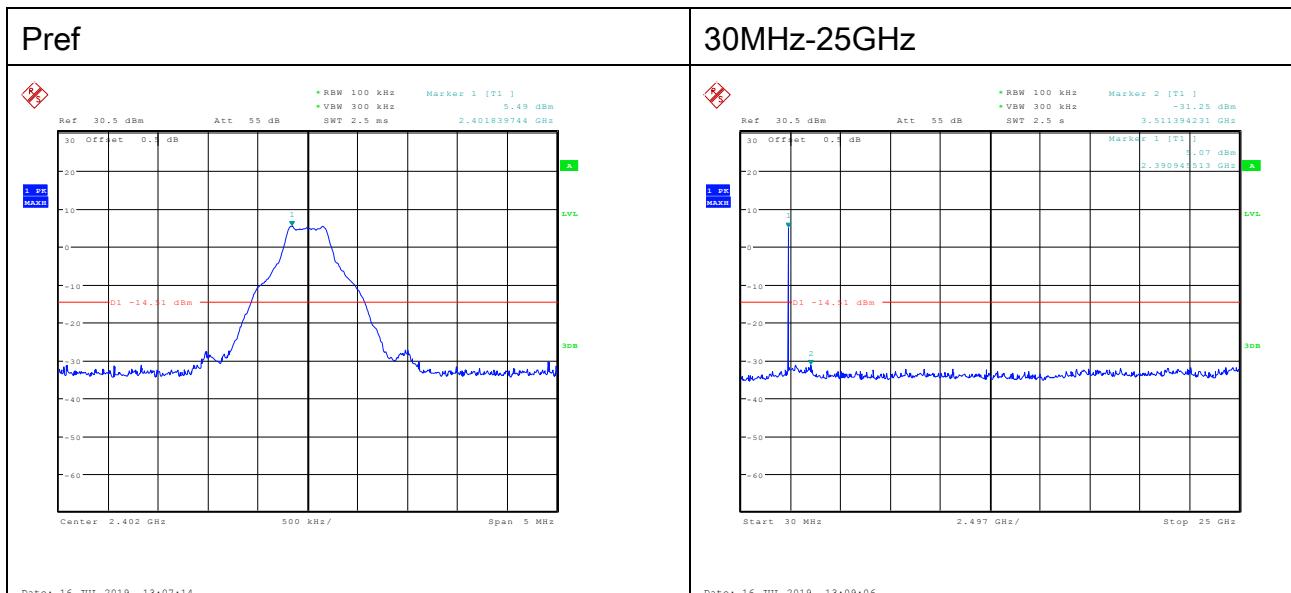


Bluetooth Basic

Mid channel

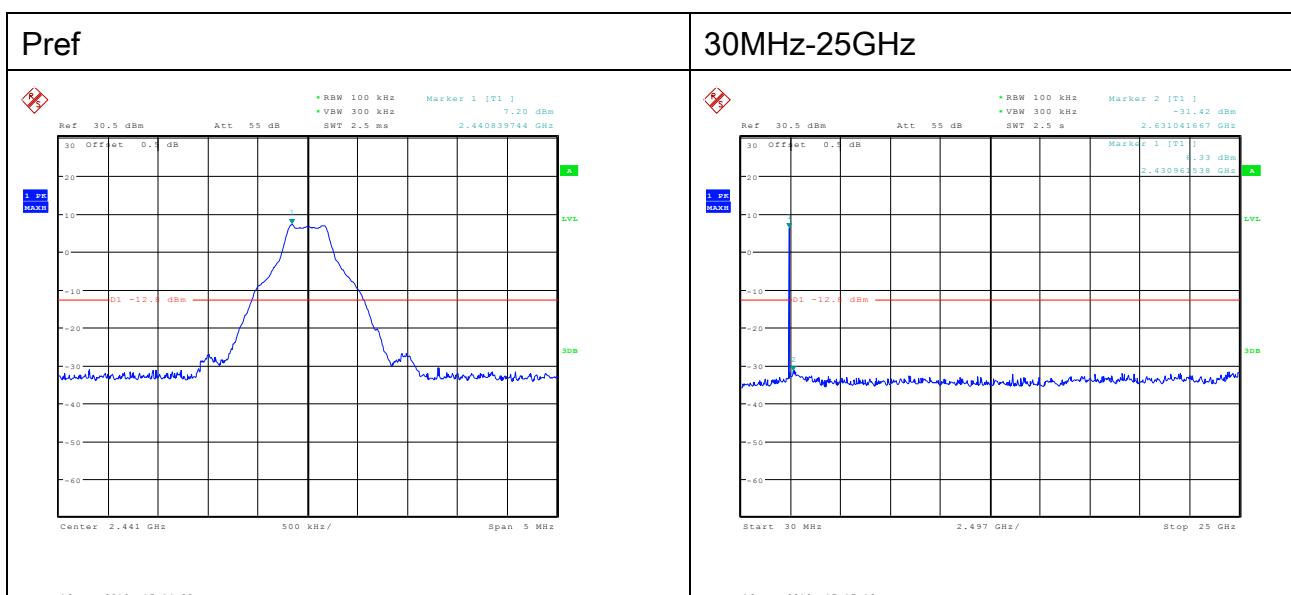


Bluetooth Basic

High Channel

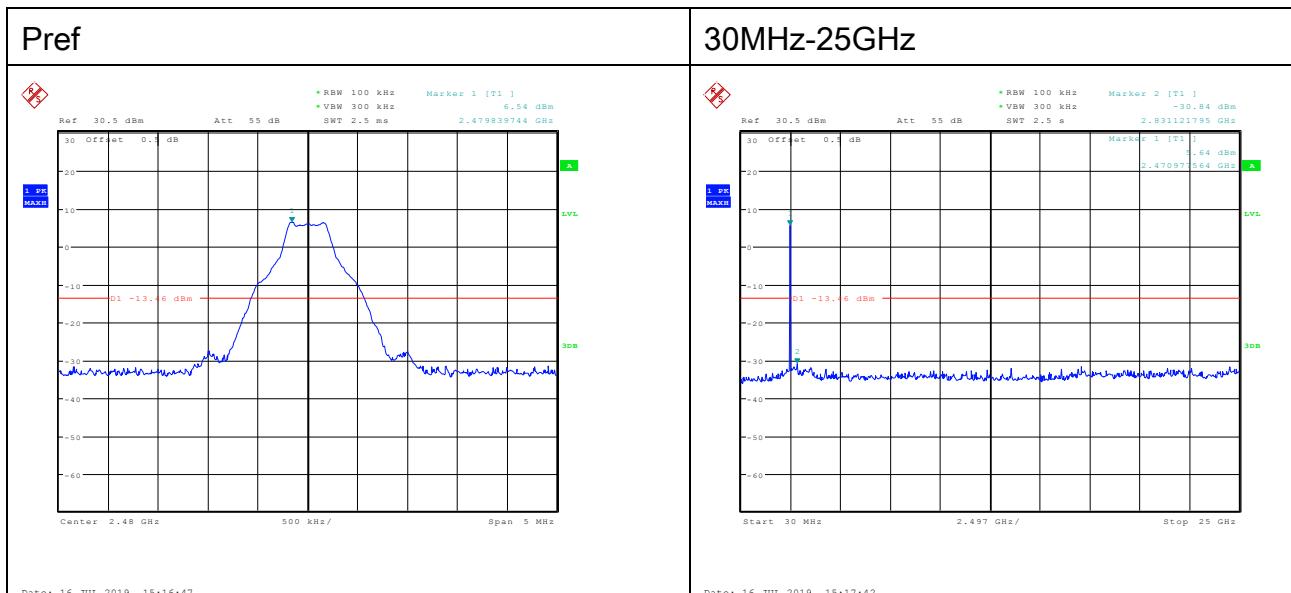


Bluetooth Basic

Bandedge hopping On

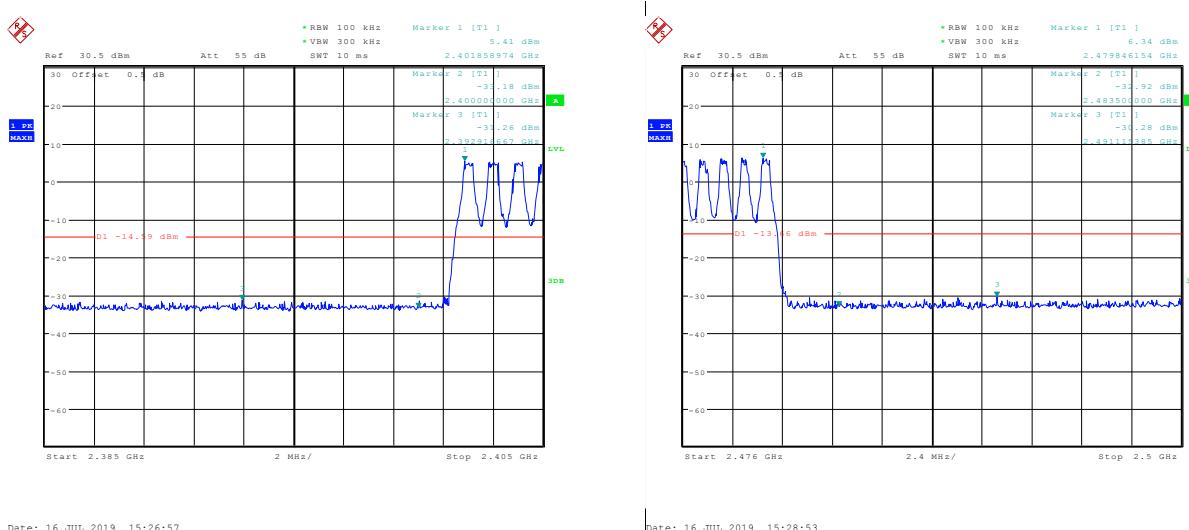


Bluetooth EDR

Low Channel

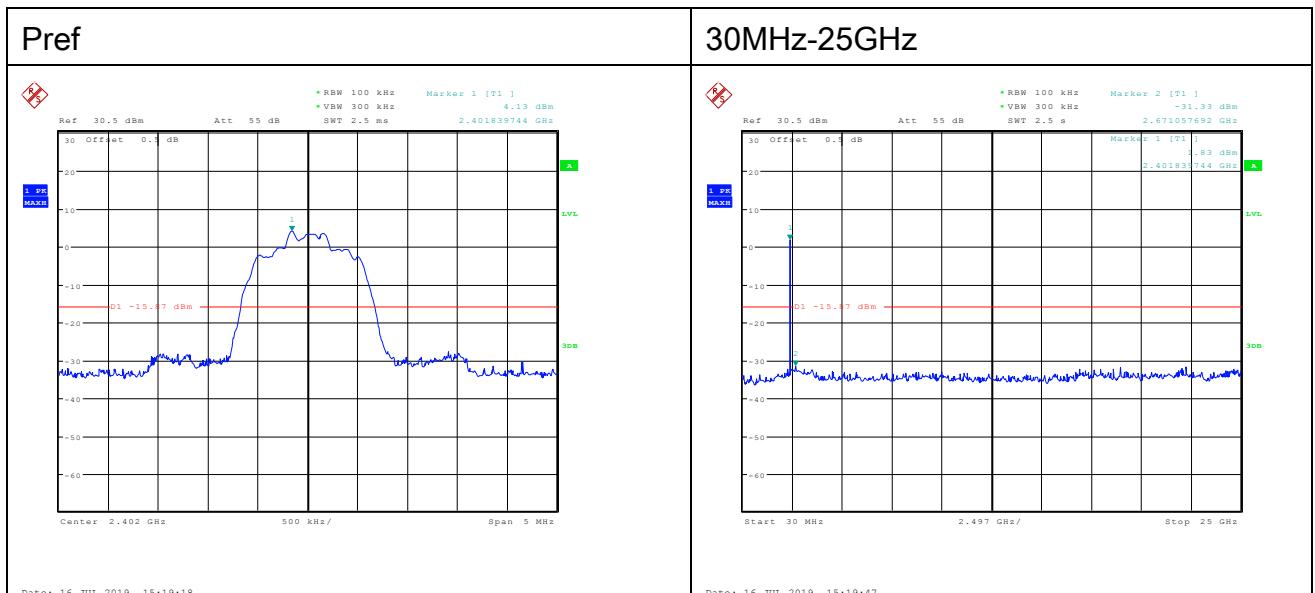


Bluetooth EDR

Mid Channel

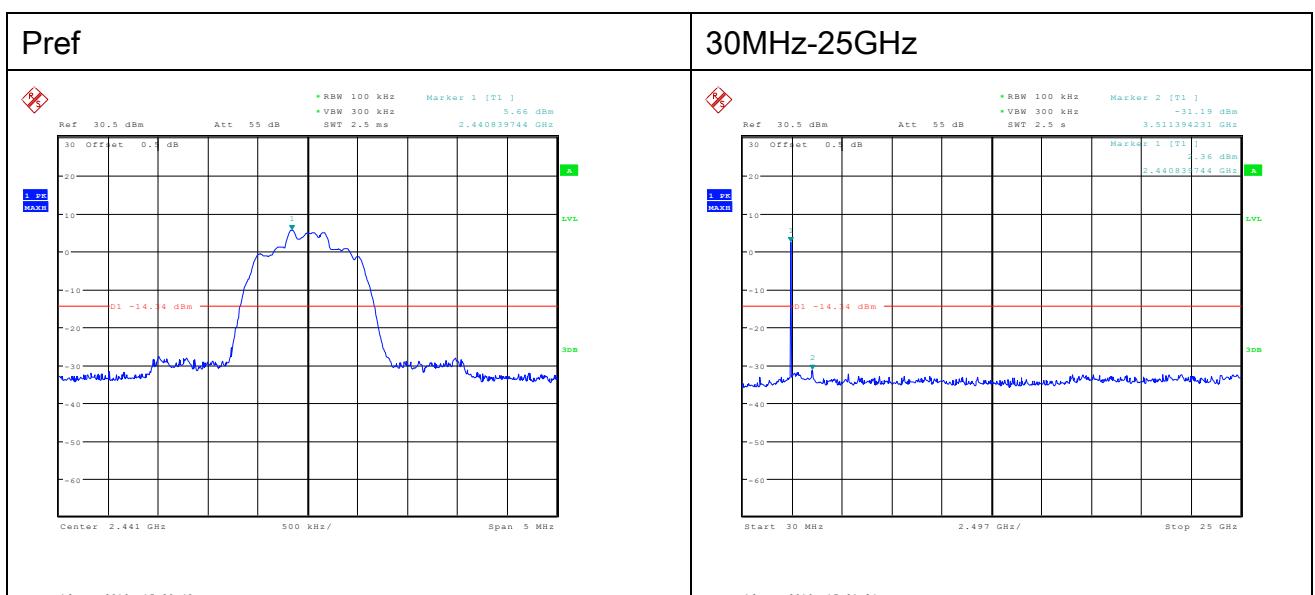


Bluetooth EDR

High Channel

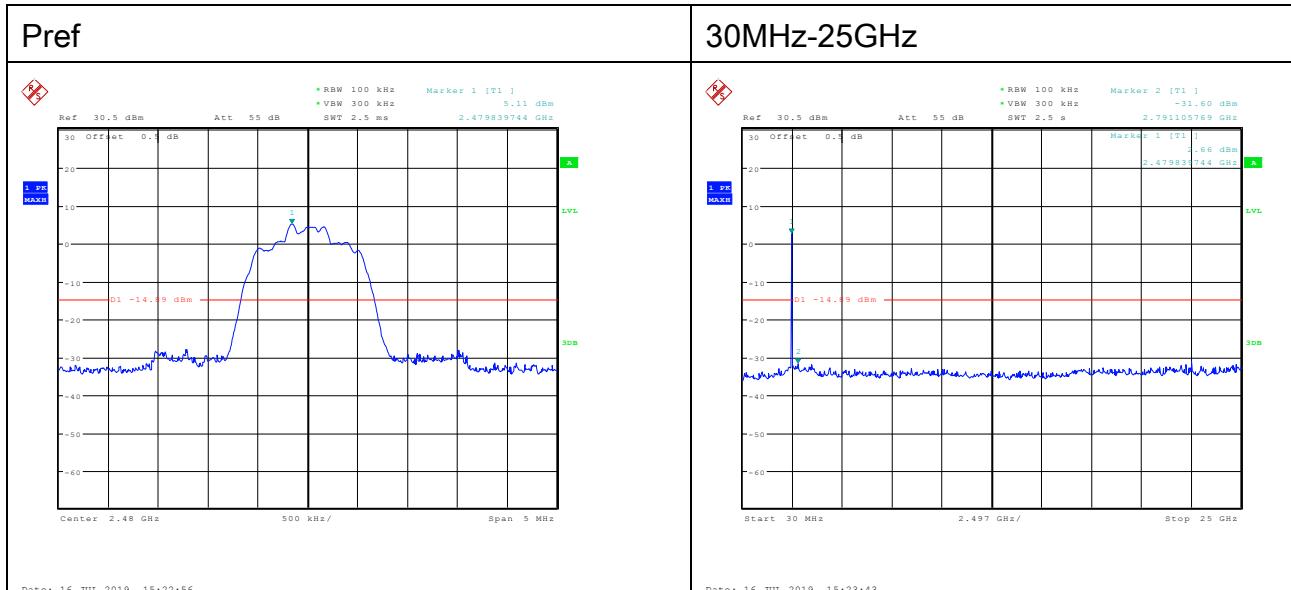

Bluetooth EDR

Bandedge

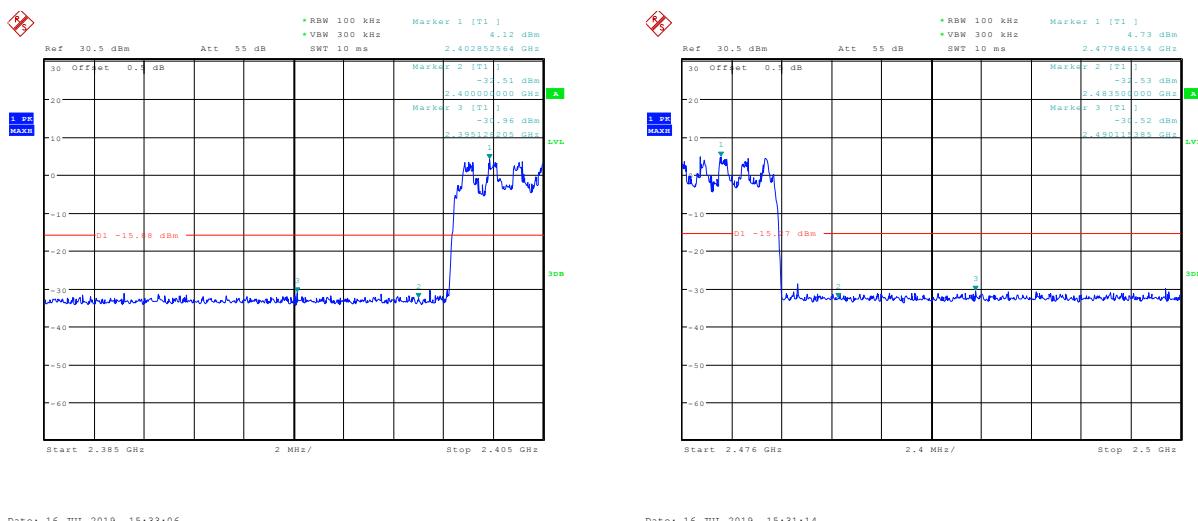

13. ANTENNA REQUIREMENTS

13.1. Applicable requirements

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. For the fixed point-to-point operation, the power shall be reduced by one dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the FCC rule.

13.2. Antenna Connector

Antenna Connector is on the PCB within enclosure and not accessible to user.

13.3. Antenna Gain

The antenna gain of EUT is less than 6 dBi.

-----End of Report-----