



FCC / IC Test Report

FOR:

Moog Inc.

Model Name:

ILC3000

Product Description:

Asset Tracker

FCC ID: 2AGRZ-ILC3000

IC ID: 20942-ILC3000

Per:

47 CFR Part 22, 24

RSS-132 Issue 3

RSS-133 Issue 6

TEST REPORT #: EMC_MOOGI-005-15001_FCC_22_24

DATE: February 3, 2016



CETECOM Inc.

411 Dixon Landing Road ♦ Milpitas, CA 95035 ♦ U.S.A.

Phone: + 1 (408) 586 6200 ♦ Fax: + 1 (408) 586 6299 ♦ E-mail: info@cetecomusa.com ♦ <http://www.cetecom.com>

CETECOM Inc. is a Delaware Corporation with Corporation number: 2905571

Table of Contents

| | | |
|--------|---|----|
| 1 | Assessment..... | 4 |
| 2 | Administrative Data | 5 |
| 2.1 | Identification of the Testing Laboratory Issuing the Test Report | 5 |
| 2.2 | Identification of the Client | 5 |
| 2.3 | Identification of the Manufacturer | 5 |
| 2.4 | Dates of Testing: | 5 |
| 3 | Equipment under Test (EUT)..... | 6 |
| 3.1 | Specification of the Equipment under Test | 6 |
| 3.2 | Identification of the Equipment under Test (EUT) | 7 |
| 3.3 | Identification of Accessory equipment..... | 7 |
| 4 | Summary of Measurement Results | 8 |
| 5 | Measurements..... | 12 |
| 5.1 | Measurement Uncertainty | 12 |
| 5.2 | Nominal Environmental Conditions..... | 12 |
| 5.3 | Nominal Environmental Test Conditions..... | 12 |
| 5.4 | Inheriting Test Results from Incorporated Module Certification:..... | 12 |
| 5.5 | Nominal Cellular Test Conditions..... | 12 |
| 5.6 | Additional Test Information..... | 12 |
| 6 | RF Power Output radiated..... | 13 |
| 6.1 | References | 13 |
| 6.2 | Limits: | 13 |
| 6.3 | Test modulation..... | 13 |
| 6.4 | Measurement Result:..... | 14 |
| 6.5 | Measurement Plots: | 15 |
| 6.5.1 | EIRP, GSM 850, Tx: Ch. Low | 15 |
| 6.5.2 | EIRP, GSM 850, Tx: Ch. Mid..... | 16 |
| 6.5.3 | EIRP, GSM 850, Tx: Ch. High | 17 |
| 6.5.4 | EIRP, UMTS FDD V, Tx: Ch. Low | 18 |
| 6.5.5 | EIRP, UMTS FDD V, Tx: Ch. Mid..... | 19 |
| 6.5.6 | EIRP, UMTS FDD V, Tx: Ch. High | 20 |
| 6.5.7 | EIRP, GSM 1900, Tx: Ch. Low | 21 |
| 6.5.8 | EIRP, GSM 1900, Tx: Ch. Mid..... | 22 |
| 6.5.9 | EIRP, GSM 1900, Tx: Ch. High | 23 |
| 6.5.10 | EIRP, UMTS FDD II, Tx: Ch. Low | 24 |
| 6.5.11 | EIRP, UMTS FDD II, Tx: Ch. Mid..... | 25 |
| 6.5.12 | EIRP, UMTS FDD II, Tx: Ch. High..... | 26 |
| 7 | Spurious Emissions Radiated | 27 |
| 7.1 | References: | 27 |
| 7.2 | Limits: | 27 |
| 7.2.1 | FCC 22.917 Emission limitations for cellular equipment. | 27 |
| 7.2.2 | FCC 24.238 Emission limitations for Broadband PCS equipment. | 27 |
| 7.2.3 | RSS-132 Section 5.5.1.1 and RSS-133 Section 6.5.1 | 27 |
| 7.3 | Radiated out of band measurement procedure: | 28 |
| 7.3.1 | Sample Calculations for Radiated Measurements: | 29 |
| 7.3.2 | Spectrum Analyzer Settings | 29 |
| 7.4 | Test Results | 30 |
| 7.4.1 | GSM 850..... | 30 |
| 7.4.2 | UMTS FDD BAND V | 30 |

| | | |
|--------|--|----|
| 7.4.3 | GSM 1900..... | 31 |
| 7.4.4 | UMTS FDD BAND II | 31 |
| 7.4.5 | GSM 850, Tx: Ch. Low, 30 MHz – 1 GHz..... | 32 |
| 7.4.6 | GSM 850, Tx: Ch. Low, 1 GHz – 9 GHz | 33 |
| 7.4.7 | GSM 850, Tx: Ch. Mid, 9 KHz – 30 MHz | 34 |
| 7.4.8 | GSM 850, Tx: Ch. Mid, 30 MHz – 1 GHz..... | 35 |
| 7.4.9 | GSM 850, Tx: Ch. Mid, 1 GHz – 9 GHz..... | 36 |
| 7.4.10 | GSM 850, Tx: Ch. High, 30 MHz – 1 GHz..... | 37 |
| 7.4.11 | GSM 850, Tx: Ch. High, 1 GHz – 9 GHz | 38 |
| 7.4.12 | UMTS FDD Band V, Tx: Ch. Low, 30 MHz – 1 GHz..... | 39 |
| 7.4.13 | UMTS FDD Band V, Tx: Ch. Low, 1 GHz – 9 GHz..... | 40 |
| 7.4.14 | UMTS FDD Band V, Tx: Ch. Mid, 9 KHz – 30 MHz | 41 |
| 7.4.15 | UMTS FDD Band V, Tx: Ch. Mid, 30 MHz – 1 GHz..... | 42 |
| 7.4.16 | UMTS FDD Band V, Tx: Ch. Mid, 1 GHz – 9 GHz | 43 |
| 7.4.17 | UMTS FDD Band V, Tx: Ch. High, 30 MHz – 1 GHz | 44 |
| 7.4.18 | UMTS FDD Band V, Tx: Ch. High, 1 GHz – 9 GHz..... | 45 |
| 7.4.19 | GSM 1900, Tx: Ch. Low, 30 MHz – 1 GHz..... | 46 |
| 7.4.20 | GSM 1900, Tx: Ch. Low, 1 GHz – 18 GHz | 47 |
| 7.4.21 | GSM 1900, Tx: Ch. Low, 18 GHz – 22 GHz | 48 |
| 7.4.22 | GSM 1900, Tx: Ch. Mid, 9 KHz – 30 MHz | 49 |
| 7.4.23 | GSM 1900, Tx: Ch. Mid, 30 MHz – 1 GHz | 50 |
| 7.4.24 | GSM 1900, Tx: Ch. Mid, 1 GHz – 18 GHz..... | 51 |
| 7.4.25 | GSM 1900, Tx: Ch. Mid, 18 GHz – 22 GHz..... | 52 |
| 7.4.26 | GSM 1900, Tx: Ch. High, 30 MHz – 1 GHz..... | 53 |
| 7.4.27 | GSM 1900, Tx: Ch. High, 1 GHz – 18 GHz | 54 |
| 7.4.28 | GSM 1900, Tx: Ch. High, 18 GHz – 22 GHz | 55 |
| 7.4.29 | UMTS FDD Band II, Tx: Ch. Low, 30 MHz – 1 GHz | 56 |
| 7.4.30 | UMTS FDD Band II, Tx: Ch. Low, 1 GHz – 18 GHz..... | 57 |
| 7.4.31 | UMTS FDD Band II, Tx: Ch. Low, 18 GHz – 22 GHz..... | 58 |
| 7.4.32 | UMTS FDD Band II, Tx: Ch. Mid, 9 KHz – 30 MHz..... | 59 |
| 7.4.33 | UMTS FDD Band II, Tx: Ch. Mid, 30 MHz – 1 GHz..... | 60 |
| 7.4.34 | UMTS FDD Band II, Tx: Ch. Mid, 1 GHz – 18 GHz | 61 |
| 7.4.35 | UMTS FDD Band II, Tx: Ch. Mid, 18 GHz – 22 GHz | 62 |
| 7.4.36 | UMTS FDD Band II, Tx: Ch. High, 30 MHz – 1 GHz | 63 |
| 7.4.37 | UMTS FDD Band II, Tx: Ch. High, 1 GHz – 18 GHz..... | 64 |
| 7.4.38 | UMTS FDD Band II, Tx: Ch. High, 18 GHz – 22 GHz..... | 65 |
| 8 | Test Equipment and Ancillaries used for tests. | 66 |
| 9 | Block Diagrams..... | 67 |
| 10 | Revision History..... | 69 |

1 Assessment

The following equipment as further described in section 3 of this test report was evaluated against the applicable criteria specified in FCC CFR47 Parts 22, 24 and Industry Canada Radio Standard Specifications RSS-132 Issue 3 and RSS-133 Issue 6. No deviations were ascertained during the course of the tests performed.

| Company | Description | Model # |
|-----------|---------------|---------|
| Moog Inc. | asset tracker | ILC3000 |

Report reviewed by:

February 3, 2016 Compliance Franz Engert
(Compliance Manager)

Digitally signed by Franz Engert
DN: cn=Franz Engert, c=US,
o=CETECOM,
ou=Compliance,
email=franz.enger@cetecom.com

| Date | Section | Name | Signature |
|------|---------|------|-----------|
|------|---------|------|-----------|

Responsible for the Report:

February 3, 2016 Compliance Yu-Chien Ho
(EMC Engineer)

Yu-Chien Ho

| Date | Section | Name | Signature |
|------|---------|------|-----------|
|------|---------|------|-----------|

The test results of this test report relate exclusively to the test item specified in Section 3.
CETECOM Inc. USA does not assume responsibility for any conclusions and generalizations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item. The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of CETECOM Inc. USA.

2 Administrative Data

2.1 Identification of the Testing Laboratory Issuing the Test Report

| | |
|-----------------------------------|--|
| Company Name: | CETECOM Inc. |
| Department: | Compliance |
| Address: | CETECOM Inc. 411 Dixon Landing Rd Milpitas, CA 95035 |
| Telephone: | +1 (408) 586 6200 |
| Fax: | +1 (408) 586 6299 |
| Compliance Manager: | Franz Engert |
| Responsible Project Leader | Yu-Chien Ho |

2.2 Identification of the Client

| | |
|--------------------------|---------------------|
| Client Firm/Name: | Moog Inc. |
| Street Address: | 1421 McCarthy Blvd. |
| City/Zip Code | Milpitas, CA 95035 |
| Country | USA |

2.3 Identification of the Manufacturer

| | |
|-------------------------------|-------------------|
| Manufacturer's Name: | Same as Applicant |
| Manufacturers Address: | ----- |
| City/Zip Code | ----- |
| Country | ----- |

2.4 Dates of Testing:

November 17, 2015 – December 21, 2015

3 Equipment under Test (EUT)

3.1 Specification of the Equipment under Test

| | |
|---|---|
| Model #: | ILC3000 |
| HW Version : | 001 |
| SW Version : | 3.0.0.1 |
| FCC-ID : | 2AGRZ-ILC3000 |
| IC-ID: | 20942-ILC3000 |
| HVIN: | ILC3000 |
| PMN: | ILC3000 |
| FVIN: | N/A |
| Product Description: | asset tracker |
| Module Information: | Module UBlox Lisa U201; FCC-ID: XPYLISAU201; IC: 8595A-LISAU201; |
| Technology / Type(s) of Modulation: | GSM/GPRS/EGPRS 900/1800MHz, multislots class 12; UMTS/HSPA FDD BAND II, V |
| Operating Frequency Ranges (MHz) / Channels: | GSM 850: 824 MHz – 849 MHz GSM 1900: 1850 MHz - 1910 MHz UMTS FDD BAND V: 824 MHz – 849 MHz UMTS FDD BAND II: 1850 MHz – 1910 MHz |
| Max. Measured Radiated Output Power | 31.5dBm EIRP GSM 850 |
| Antenna info: | internal, PIFA, peak gain: 1.5dBi@850, 2.4dBi@1850 |
| Rated Operating Voltage Range: | <ul style="list-style-type: none"> Li-ion Rechargeable Battery: Vmin: 3.3V dDC/ Vnom: 3.7V DC / Vmax: 4.2V DC AC/DC Battery Charger: 110V – 230V AC, 120mA. |
| Rated Operating Temperature Range: | Tlow: -20° C/ Tnom: 22° C/ Tmax: 60° C |
| Other Radios included in the Device: | WLAN BTLE 4.1 GPS |
| Sample Revision: | <input checked="" type="checkbox"/> Prototype; <input type="checkbox"/> Production; <input type="checkbox"/> Pre-Production |

3.2 Identification of the Equipment under Test (EUT)

| EUT # | Serial Number | Sample | HW / SW Version |
|-------|---------------|----------|-----------------|
| 1 | 320008 | Radiated | 001 / 3.0.0.1 |

3.3 Identification of Accessory equipment

| AE # | Type | Model | Manufacturer | Serial Number |
|------|------|-------|--------------|---------------|
| 1 | N/A | | | |

4 Summary of Measurement Results

GSM 850, 850 MHz Band:

| Test Specification | Test Case | Temperature and Voltage Conditions | Mode | Pass | Fail | NA | NP | Result |
|---------------------------------------|------------------------------|------------------------------------|-------------------|------|------|----|----|----------|
| §2.1046 §22.913 (a) RSS-132 5.4 | RF Output Power | Nominal | GMSK ₂ | ■ | □ | □ | □ | Complies |
| §2.1055 §22.355 RSS-132 5.3 | Frequency Stability | Nominal | GMSK ₂ | □ | □ | □ | ■ | Note 1 |
| §2.1049 §22.917(b) RSS-132 5.2 | Occupied Bandwidth | Nominal | GMSK ₂ | □ | □ | □ | ■ | Note 1 |
| §2.1051 §22.917 RSS-132 5.5 | Band Edge Compliance | Nominal | GMSK ₂ | □ | □ | □ | ■ | Note 1 |
| §2.1051 §22.917 RSS-132 5.5 | Conducted Spurious Emissions | Nominal | GMSK ₂ | □ | □ | □ | ■ | Note 1 |
| §2.1053 §22.917 RSS-132 5.5 | Radiated Spurious Emissions | Nominal | GMSK ₂ | ■ | □ | □ | □ | Complies |

Note: NA= Not Applicable; NP= Not Performed.

Note 1: Leveraged from module certification. See Section 5.4

Note 2: It has been confirmed that GMSK modulation delivers highest channel power as well as highest power density. Thus GMSK has been chosen to represent worst case for all measurements in this report.

UMTS FDD V, 850MHz Band:

| Test Specification | Test Case | Temperature and Voltage Conditions | Mode | Pass | Fail | NA | NP | Result |
|---------------------------------------|------------------------------|------------------------------------|----------|------|------|----|----|----------|
| §2.1046 §22.913 (a) RSS-132 5.4 | RF Output Power | Nominal | UMTS FDD | ■ | □ | □ | □ | Complies |
| §2.1055 §22.355 RSS-132 5.3 | Frequency Stability | Nominal | UMTS FDD | □ | □ | □ | ■ | Note 1 |
| §2.1049 §22.917(b) RSS-132 5.2 | Occupied Bandwidth | Nominal | UMTS FDD | □ | □ | □ | ■ | Note 1 |
| §2.1051 §22.917 RSS-132 5.5 | Band Edge Compliance | Nominal | UMTS FDD | □ | □ | □ | ■ | Note 1 |
| §2.1051 §22.917 RSS-132 5.5 | Conducted Spurious Emissions | Nominal | UMTS FDD | □ | □ | □ | ■ | Note 1 |
| §2.1053 §22.917 RSS-132 5.5 | Radiated Spurious Emissions | Nominal | UMTS FDD | ■ | □ | □ | □ | Complies |

Note: NA= Not Applicable; NP= Not Performed.

Note 1: Leveraged from module certification. See Section 5.4

GSM 1900, 1900 MHz Band:

| Test Specification | Test Case | Temperature and Voltage Conditions | Mode | Pass | Fail | NA | NP | Result |
|---------------------------------------|------------------------------|------------------------------------|-------------------|------|------|----|----|----------|
| §2.1046 §24.232 (a) RSS-133 6.4 | RF Output Power | Nominal | GMSK ₂ | ■ | □ | □ | □ | Complies |
| §2.1055 §24.235 RSS-133 6.3 | Frequency Stability | Nominal | GMSK ₂ | □ | □ | □ | ■ | Note 1 |
| §2.1049 §24.238(b) RSS-133 6.2 | Occupied Bandwidth | Nominal | GMSK ₂ | □ | □ | □ | ■ | Note 1 |
| §2.1051 §24.238 RSS-133 6.5 | Band Edge Compliance | Nominal | GMSK ₂ | □ | □ | □ | ■ | Note 1 |
| §2.1051 §24.238 RSS-133 6.5 | Conducted Spurious Emissions | Nominal | GMSK ₂ | □ | □ | □ | ■ | Note 1 |
| §2.1053 §24.238 RSS-133 6.5 | Radiated Spurious Emissions | Nominal | GMSK ₂ | ■ | □ | □ | □ | Complies |

Note: NA= Not Applicable; NP= Not Performed.

Note 1: Leveraged from module certification.

Note 2: It has been confirmed that GMSK modulation delivers highest channel power as well as highest power density. Thus GMSK has been chosen to represent worst case for all measurements in this report.

UMTS FDD Band II, 1900 MHz Band:

| Test Specification | Test Case | Temperature and Voltage Conditions | Mode | Pass | Fail | NA | NP | Result |
|---------------------------------------|------------------------------|------------------------------------|----------|------|------|----|----|----------|
| §2.1046 §24.232 (a) RSS-133 6.4 | RF Output Power | Nominal | UMTS FDD | ■ | □ | □ | □ | Complies |
| §2.1055 §24.235 RSS-133 6.3 | Frequency Stability | Nominal | UMTS FDD | □ | □ | □ | ■ | Note 1 |
| §2.1049 §24.238(b) RSS-133 6.2 | Occupied Bandwidth | Nominal | UMTS FDD | □ | □ | □ | ■ | Note 1 |
| §2.1051 §24.238 RSS-133 6.5 | Band Edge Compliance | Nominal | UMTS FDD | □ | □ | □ | ■ | Note 1 |
| §2.1051 §24.238 RSS-133 6.5 | Conducted Spurious Emissions | Nominal | UMTS FDD | □ | □ | □ | ■ | Note 1 |
| §2.1053 §24.238 RSS-133 6.5 | Radiated Spurious Emissions | Nominal | UMTS FDD | ■ | □ | □ | □ | Complies |

Note: NA= Not Applicable; NP= Not Performed.

Note 1: Leveraged from module certification.

5 Measurements

5.1 Measurement Uncertainty

| | Uncertainty in dB radiated <30MHz | Uncertainty in dB radiated 30MHz - 1GHz | Uncertainty in dB radiated > 1GHz | Uncertainty in dB Conducted measurement |
|---|--|---|--|--|
| standard deviation k=1 | 2.48 | 1.94 | 2.16 | 0.64 |
| 95% confidence interval in dB | 4.86 | 3.79 | 4.24 | 1.25 |
| 95% confidence interval in dB in delta to Result | +/-2.5 dB | +/-2.0 dB | +/- 2.3dB | +/-0.7dB |

5.2 Nominal Environmental Conditions

- Ambient Temperature: 20-25 °C
- Relative humidity: 40-60%

5.3 Nominal Environmental Test Conditions

- Test Temperature: 20°C (nominal);
- Test Voltage: 3.7 VDC(nominal);

Deviating test conditions are indicated at individual test description where applicable.

5.4 Inheriting Test Results from Incorporated Module Certification:

The EUT integrates the certified module UBlox Lisa U201 (details see EUT spec in section 3.1)

Taking into account guidance from FCC KDB 996369 (modular approval) and where relevant test procedures did not change conducted test results are leveraged.

This test report contains full radiated testing as per FCC 22H/24E and RSS-132 issue 3 / RSS-133 issue 6

5.5 Nominal Cellular Test Conditions

1. The different cellular operation modes of the EUT as required for testing are controlled through the link with the Digital Radio Communication Tester (R&S CMU200).
2. The EUT is tested on the low, mid and high channel of each of the supported cellular operation modes.

5.6 Additional Test Information.

Testing is performed according to the guidelines provided in FCC publication (KDB) 971168 D01 v02r02, *Measurement Guidance for Certification of Licensed Digital Transmitters* and according to relevant parts of TIA-603C 2004 as detailed below.

6 RF Power Output radiated

6.1 References

FCC: CFR Part 2.1046, CFR Part 22.913, CFR Part 24.232

IC: RSS-Gen issue 4, section 6.12; RSS-132 issue 3, section 5.4; RSS-133 issue 6, section 6.4

6.2 Limits:

ERP/EIRP (850 MHz Band)

FCC Part 22.913 (a) & RSS-132 Section 5.4

FCC: ERP < 38.45 dBm (7W)

The effective radiated power (ERP) of mobile transmitters must not exceed 7 Watts.

IC: EIRP < 40.60 dBm (11.5W)

The transmitter output power shall be measured in terms of average power. The equivalent isotropically radiated power (e.i.r.p.) for mobile equipment shall not exceed 11.5 watts.

EIRP (1900 MHz Band)

FCC Part 24.232 (c) (e) & RSS-133 Section 6.4/SRSP-510 Section 5.1.2

FCC: EIRP < 33 dBm (2W)

(b) Mobile/portable stations are limited to 2 Watts effective isotropic radiated power (EIRP).

(c) Peak transmit power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms equivalent voltage. The measurement results shall be properly adjusted for any limitations, such as detector response times, limited resolution bandwidth capability when compared to the emission bandwidth, sensitivity, etc., so as to obtain a true peak measurement over the full bandwidth of the channel.

IC: EIRP < 33 dBm (2W)

The transmitter output power shall be measured in terms of average power. The equivalent isotropically radiated power (e.i.r.p.) for mobile equipment shall not exceed 2 watts.

6.3 Test modulation


It has been confirmed that the total output powers and power densities in 1MHz are highest on GSM operating with GMSK modulation on one time slot.

6.4 Measurement Result:


| Band/Modulation | Channel | Measured Peak Power [dBm] | Limit [dBm] | Verdict |
|-----------------|---------|---------------------------|---------------|---------|
| GSM 850 / GMSK | Low | 30.6dBm ERP | 38.45 dBm ERP | PASS |
| GSM 850 / GMSK | Mid | 31.3dBm ERP | 38.45 dBm ERP | PASS |
| GSM 850 / GMSK | High | 31.5dBm ERP | 38.45 dBm ERP | PASS |
| UMTS V | Low | 23.8dBm ERP | 38.45 dBm ERP | PASS |
| UMTS V | Mid | 24.4dBm ERP | 38.45 dBm ERP | PASS |
| UMTS V | High | 24.2dBm ERP | 38.45 dBm ERP | PASS |
| GSM 1900 / GMSK | Low | 30.2dBm EIRP | 33 dBm EIRP | PASS |
| GSM 1900 / GMSK | Mid | 30.1dBm EIRP | 33 dBm EIRP | PASS |
| GSM 1900 / GMSK | High | 31.2dBm EIRP | 33 dBm EIRP | PASS |
| UMTS II | Low | 25.7dBm EIRP | 33 dBm EIRP | PASS |
| UMTS II | Mid | 25.1dBm EIRP | 33 dBm EIRP | PASS |
| UMTS II | High | 24.4dBm EIRP | 33 dBm EIRP | PASS |

6.5 Measurement Plots:


6.5.1 EIRP, GSM 850, Tx: Ch. Low

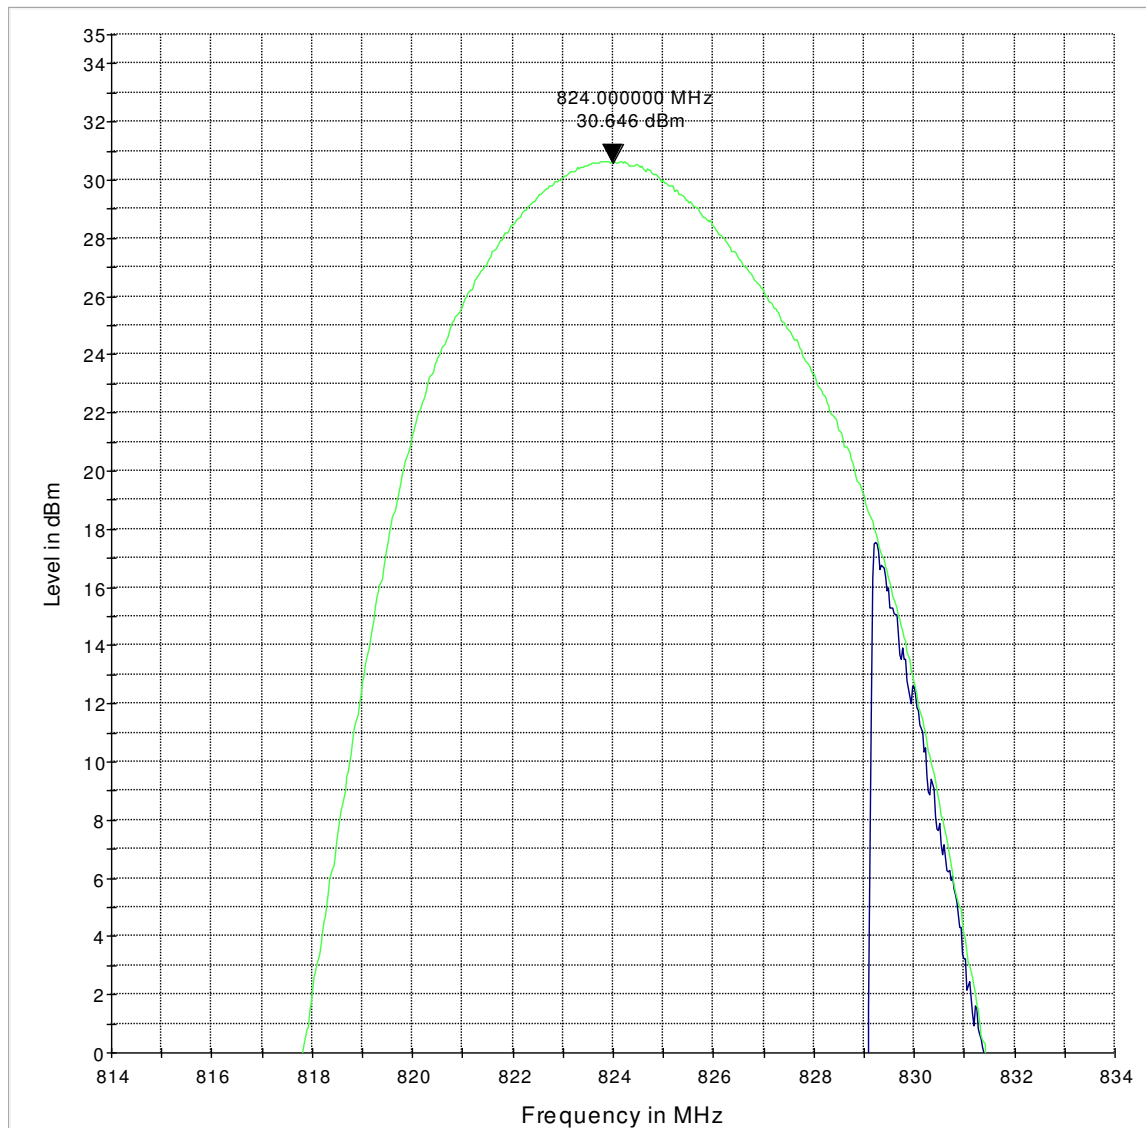


6.5.2 EIRP, GSM 850, Tx: Ch. Mid

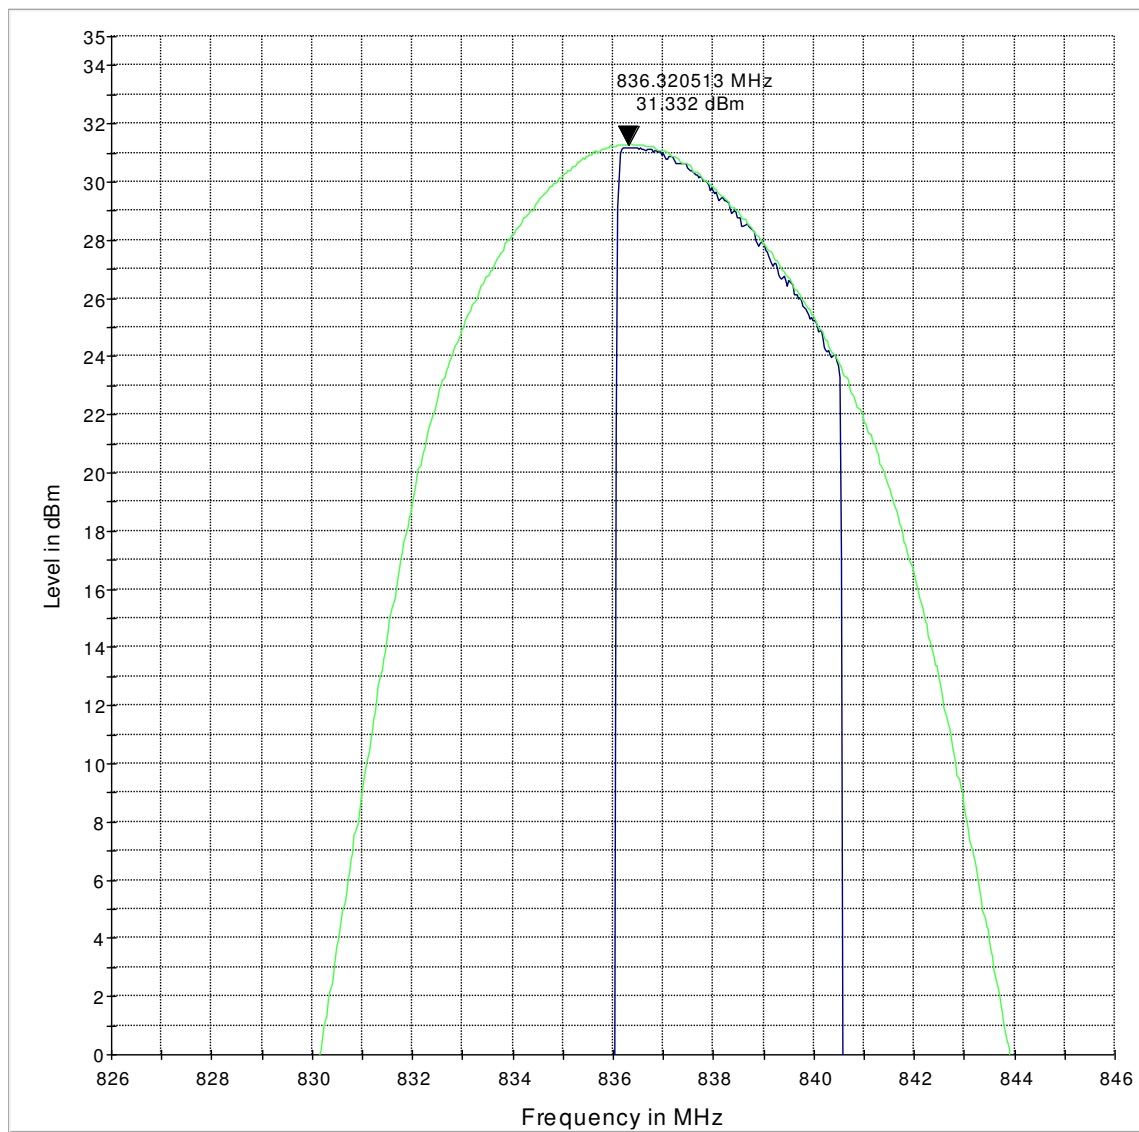


6.5.3 EIRP, GSM 850, Tx: Ch. High

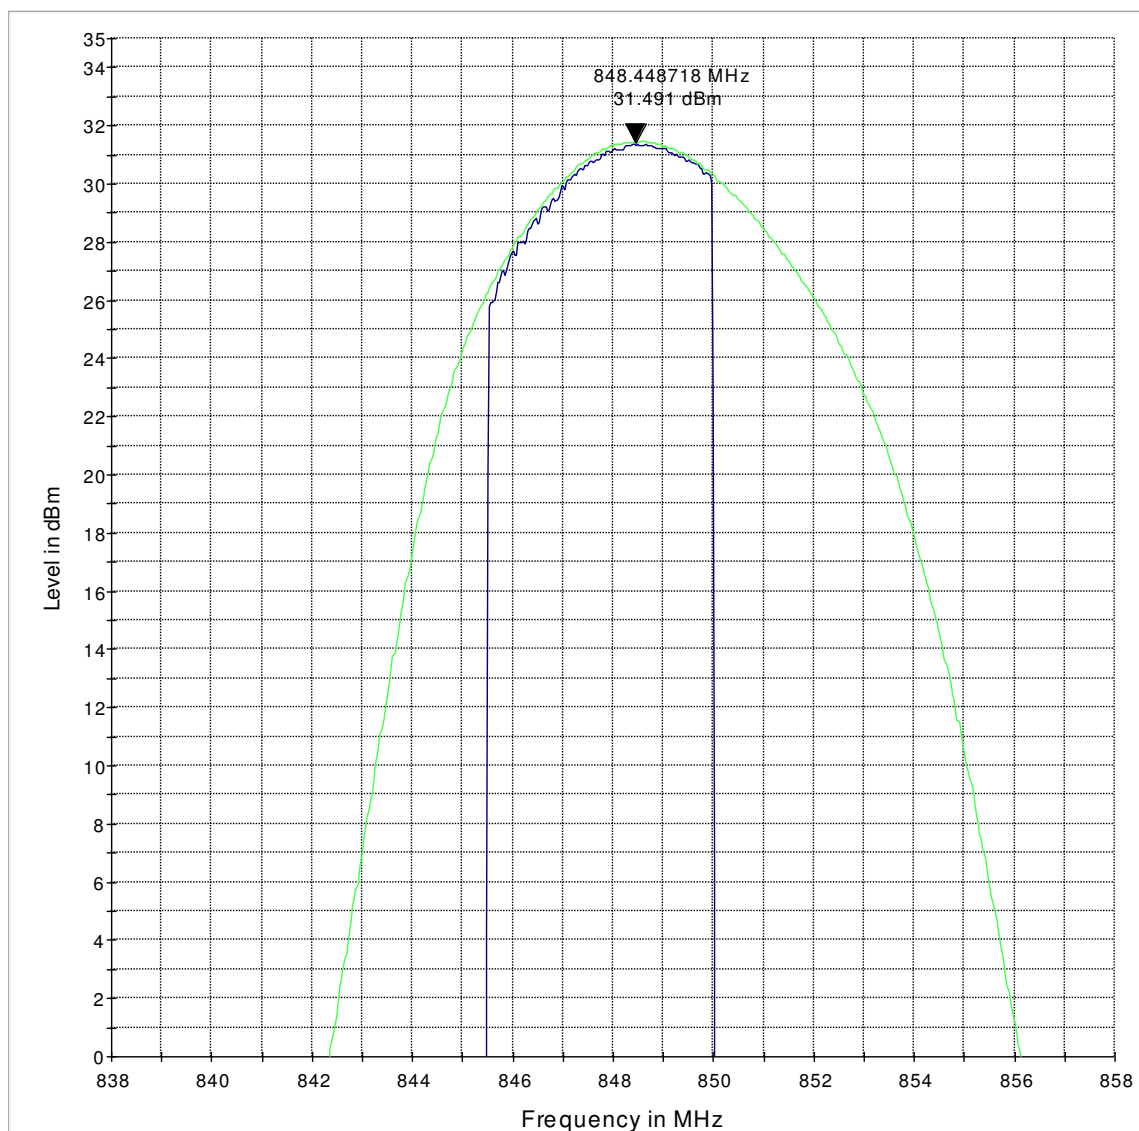


6.5.4 EIRP, UMTS FDD V, Tx: Ch. Low

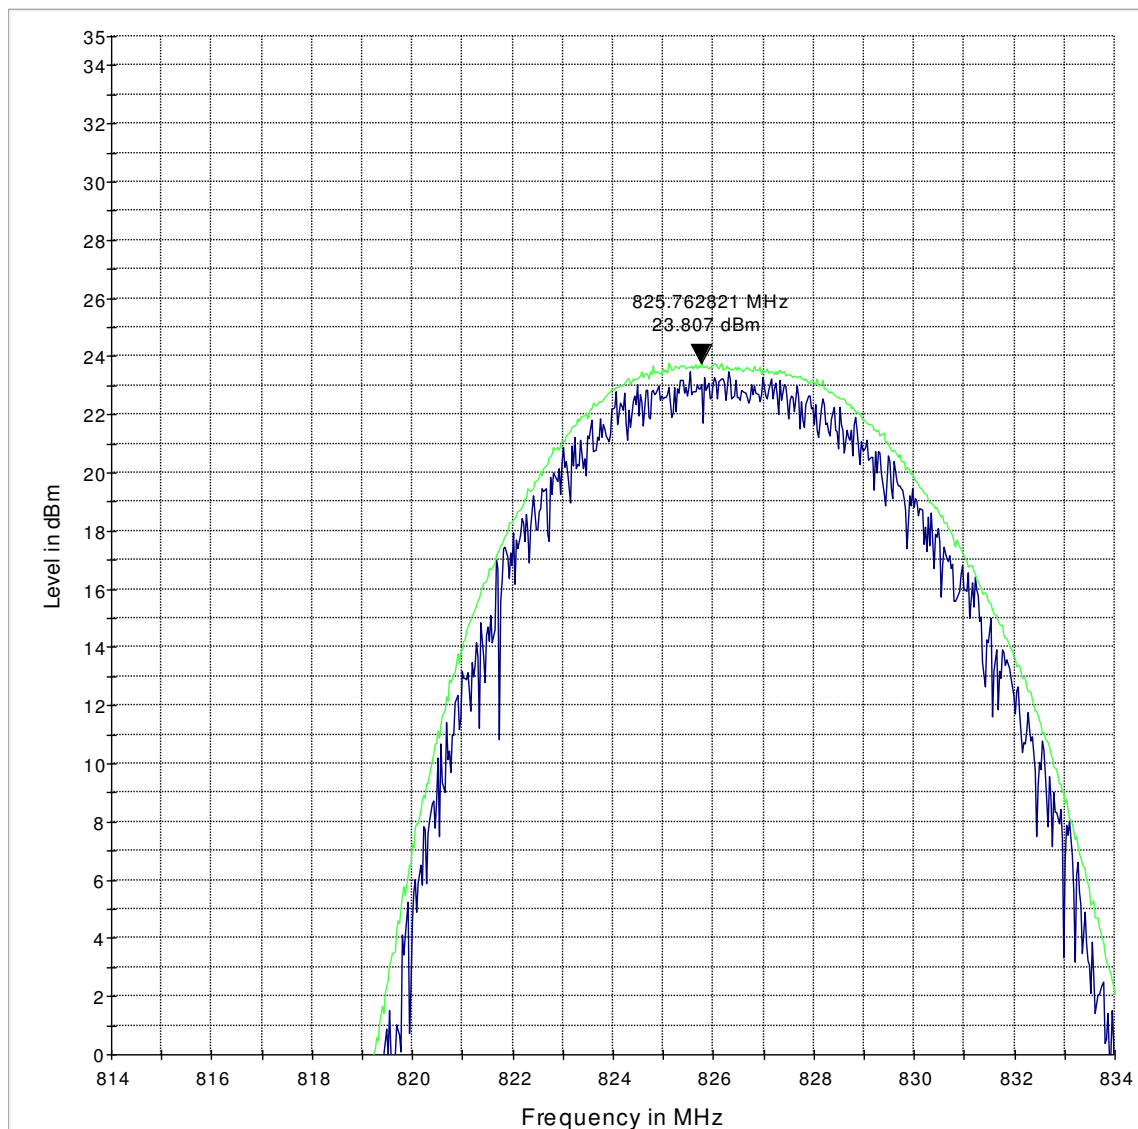


6.5.5 EIRP, UMTS FDD V, Tx: Ch. Mid

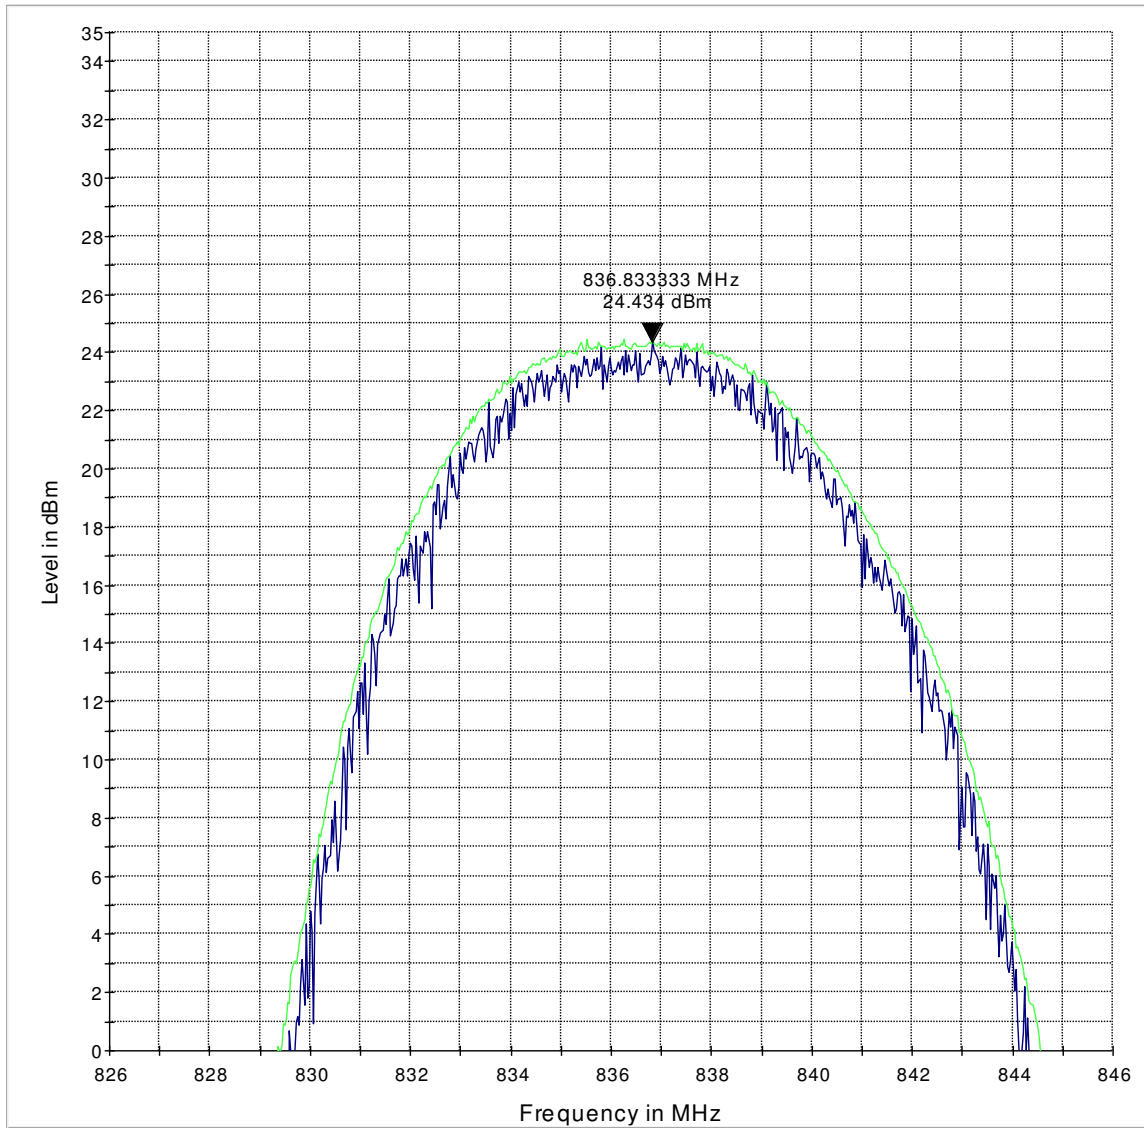


6.5.6 EIRP, UMTS FDD V, Tx: Ch. High

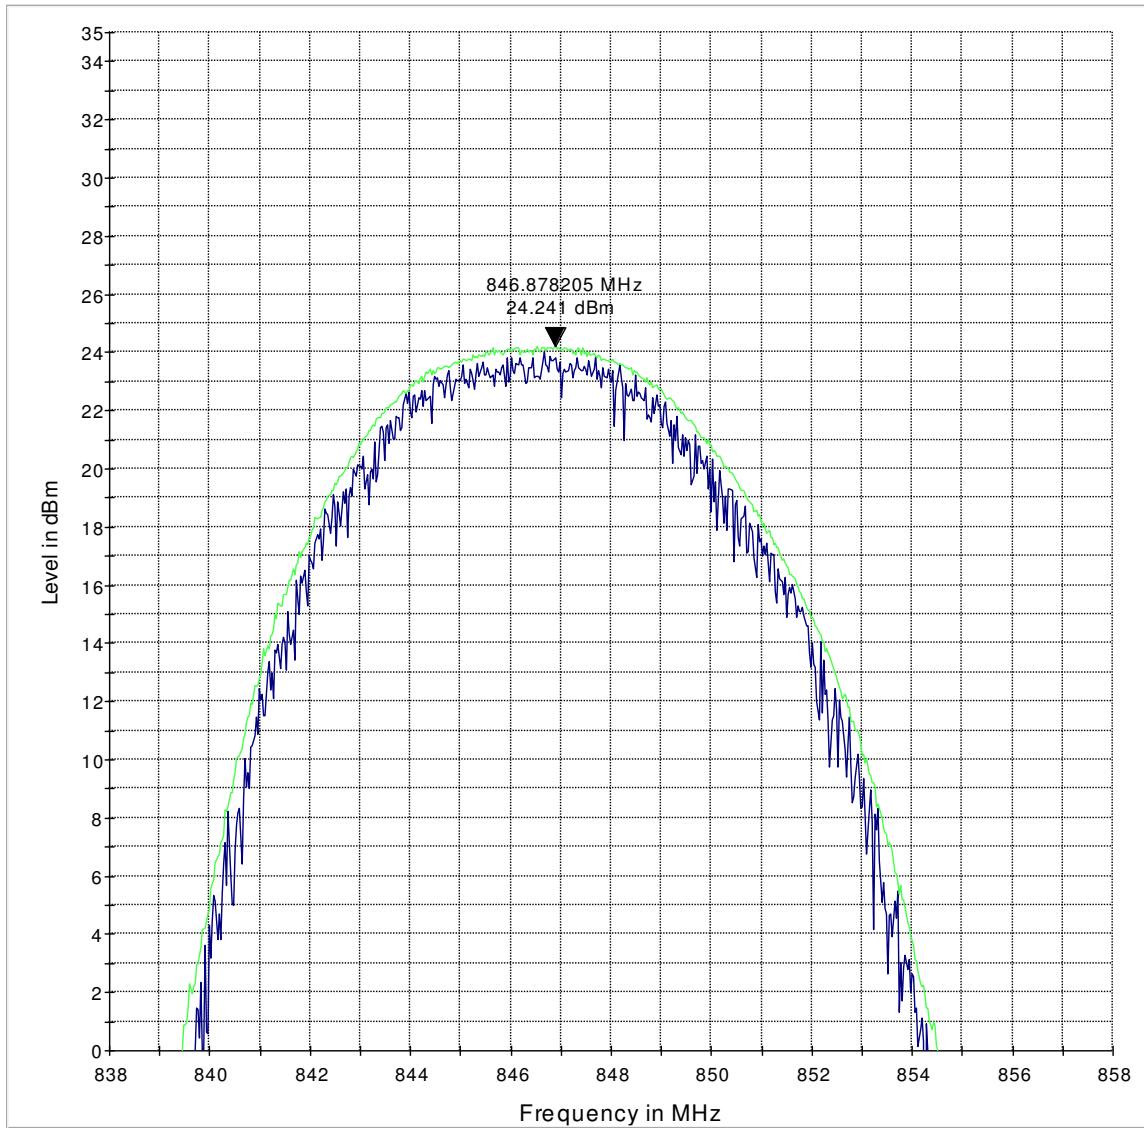


6.5.7 EIRP, GSM 1900, Tx: Ch. Low

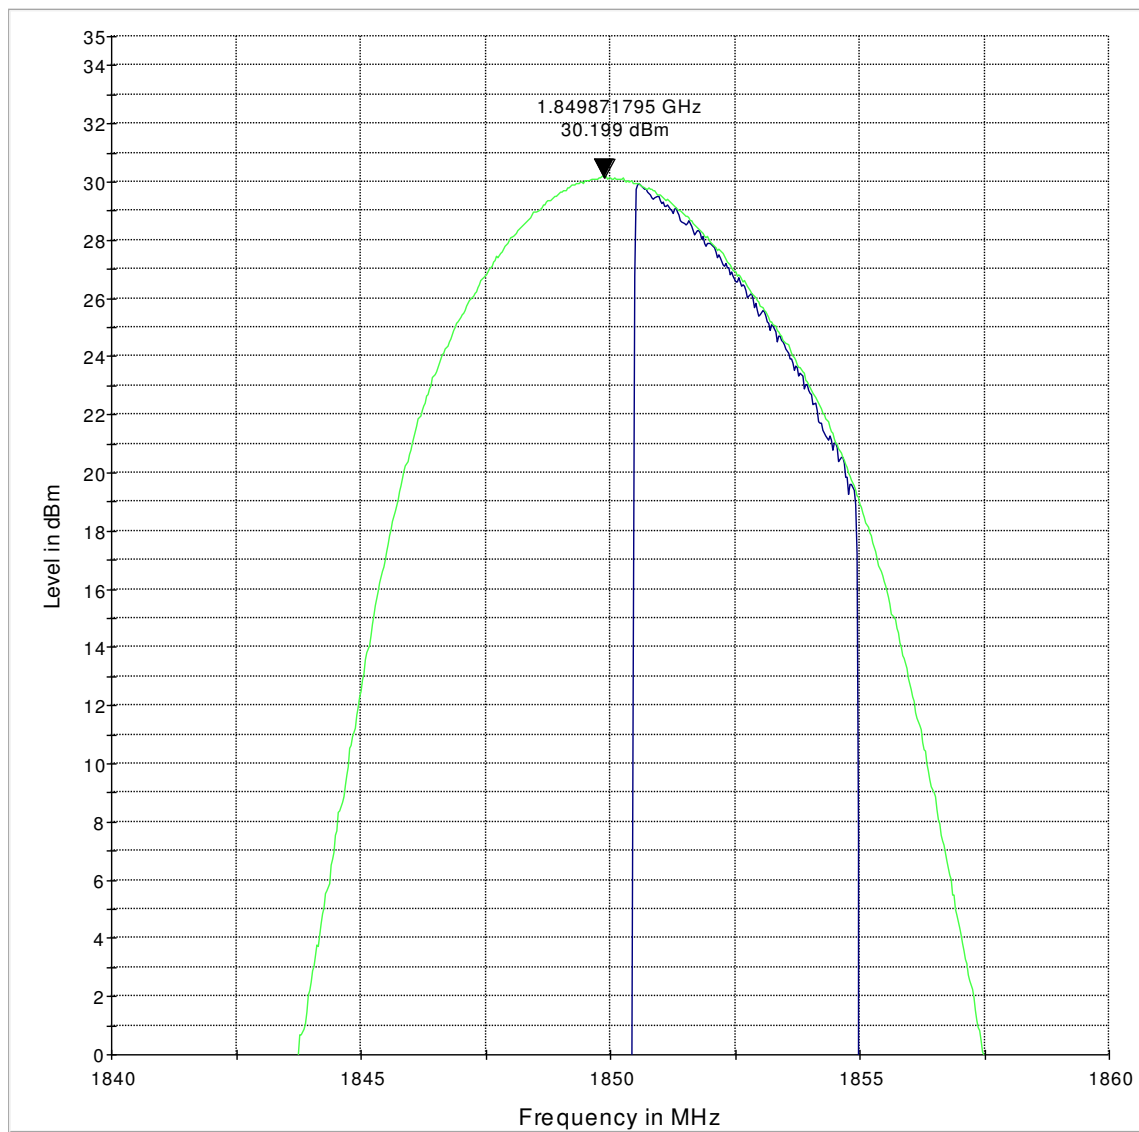


6.5.8 EIRP, GSM 1900, Tx: Ch. Mid

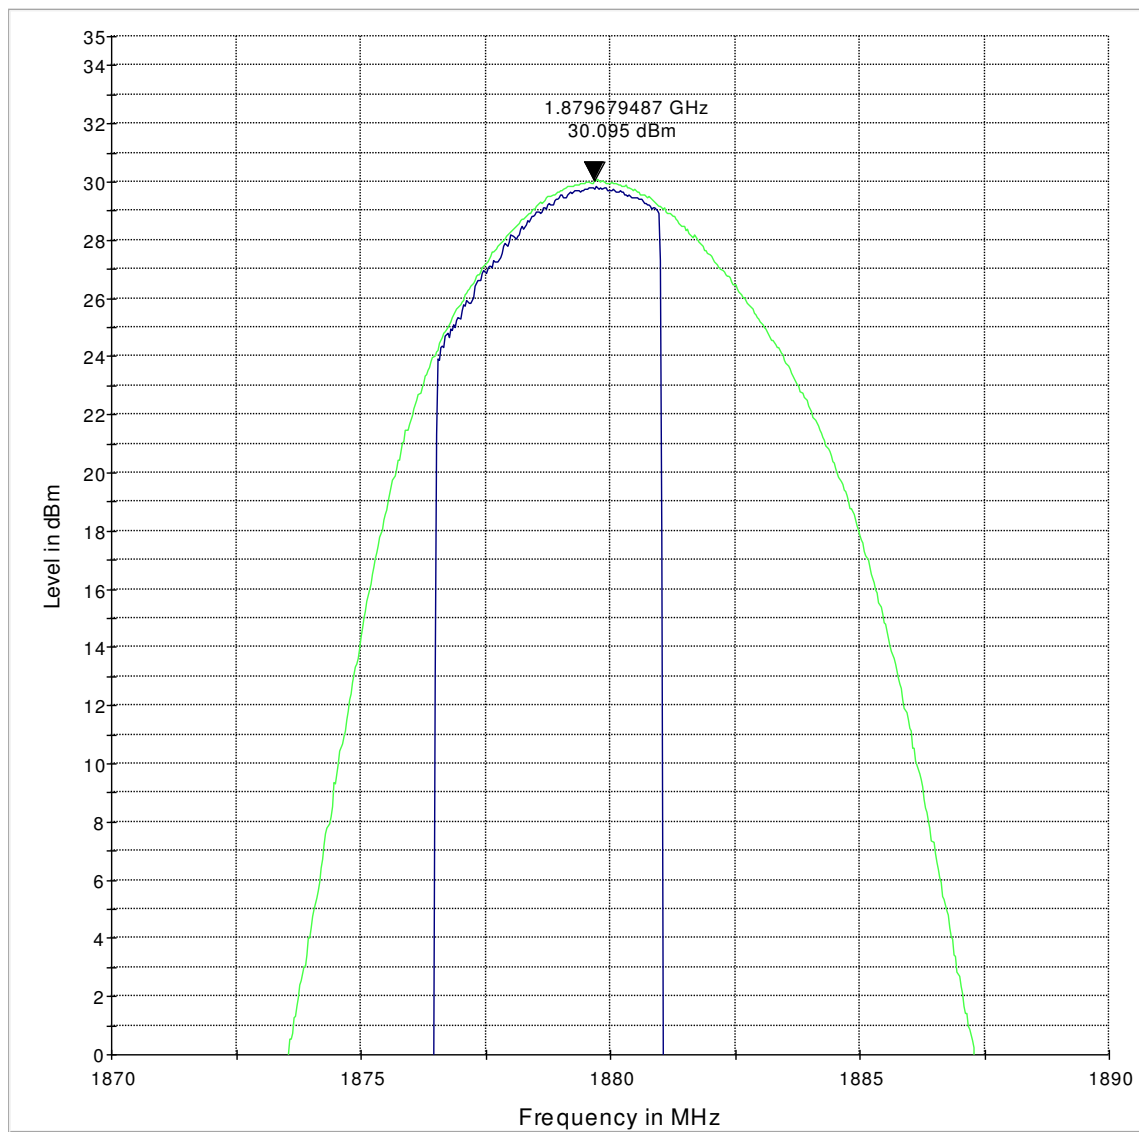


6.5.9 EIRP, GSM 1900, Tx: Ch. High

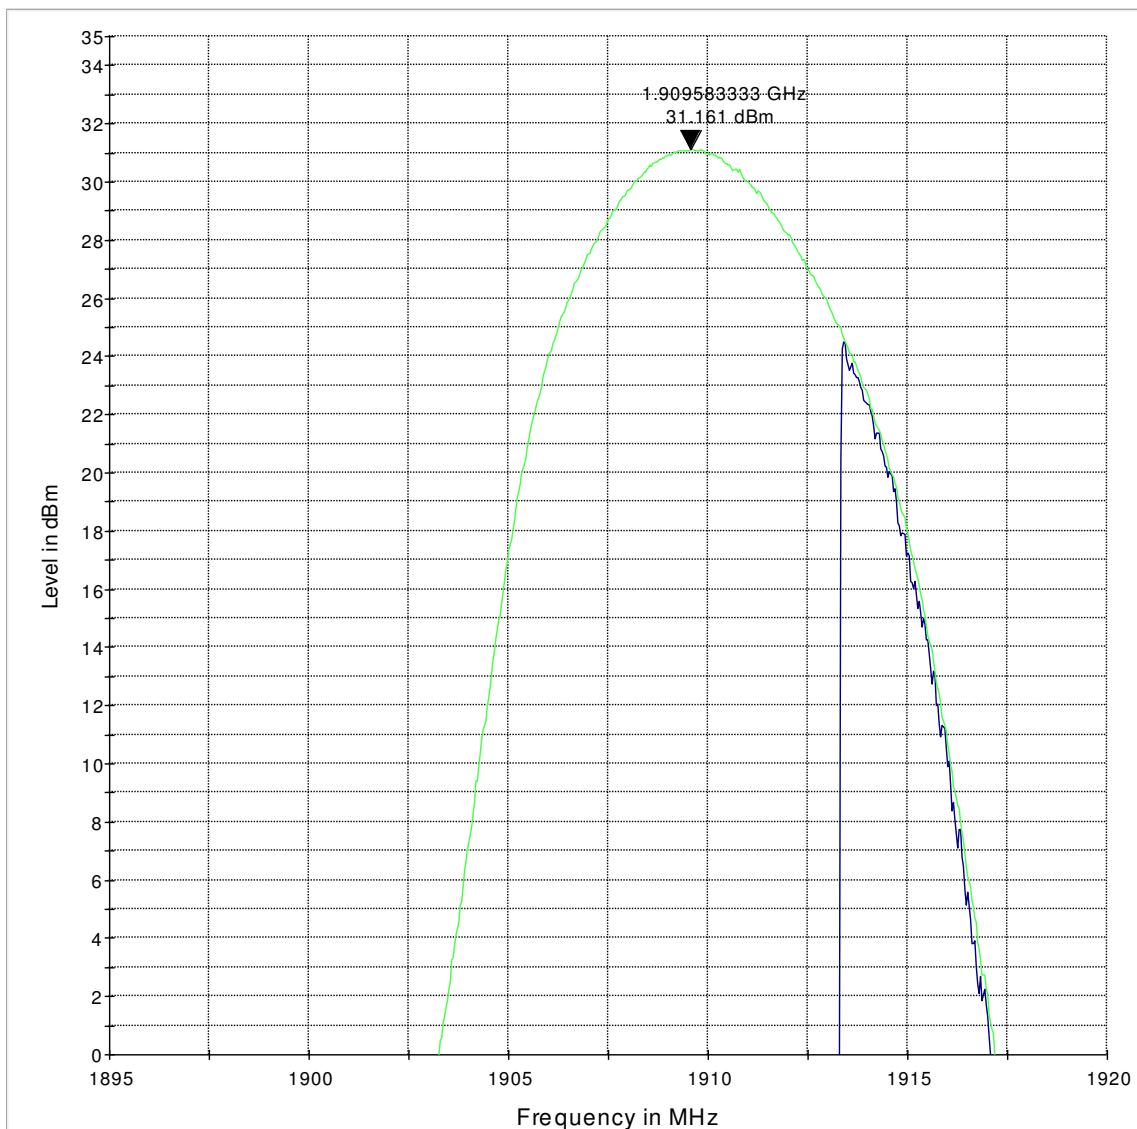


6.5.10 EIRP, UMTS FDD II, Tx: Ch. Low

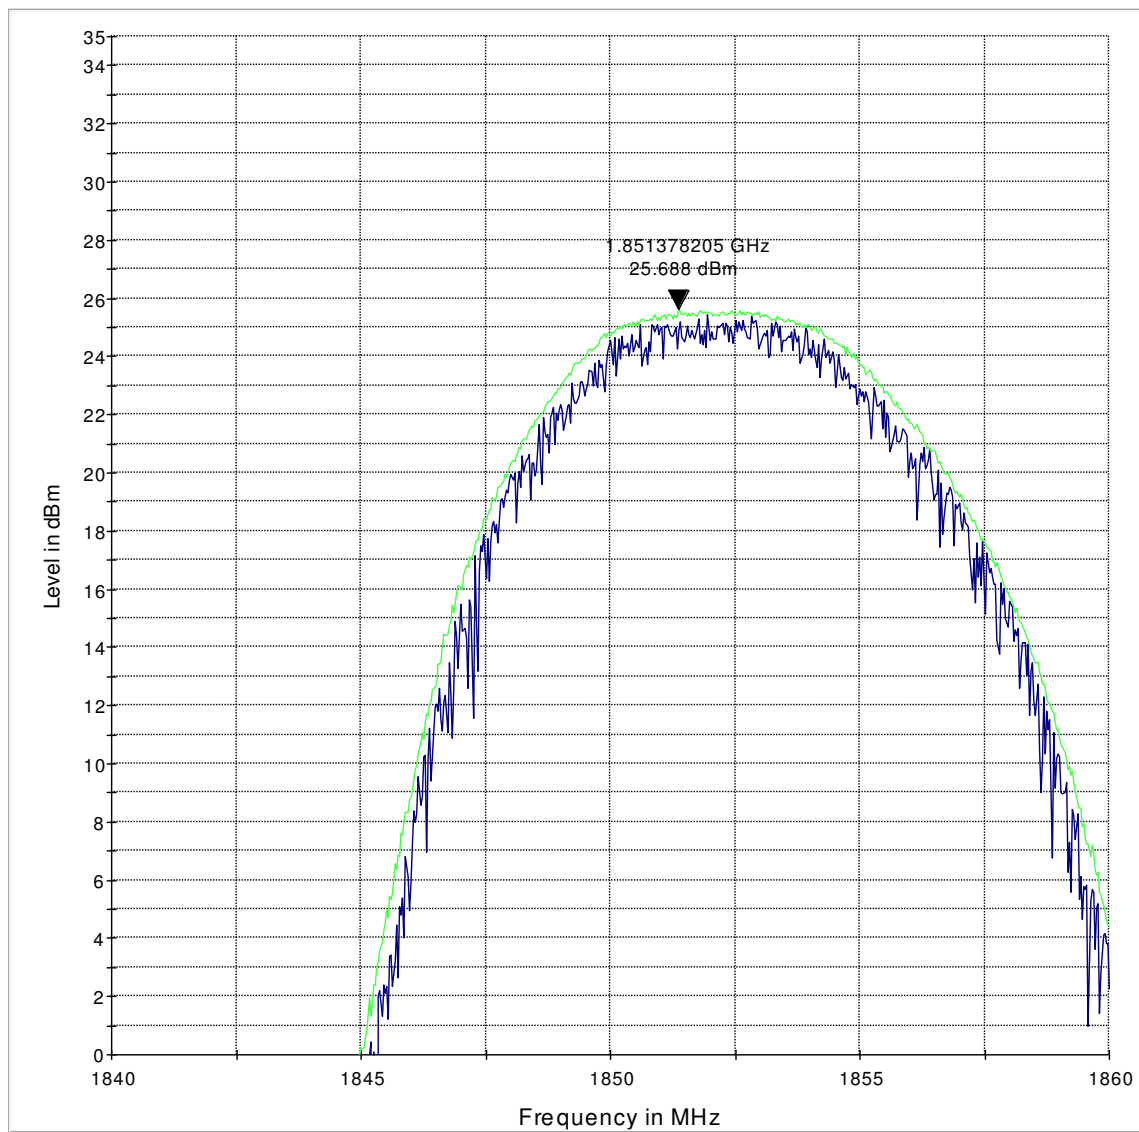

6.5.11 EIRP, UMTS FDD II, Tx: Ch. Mid

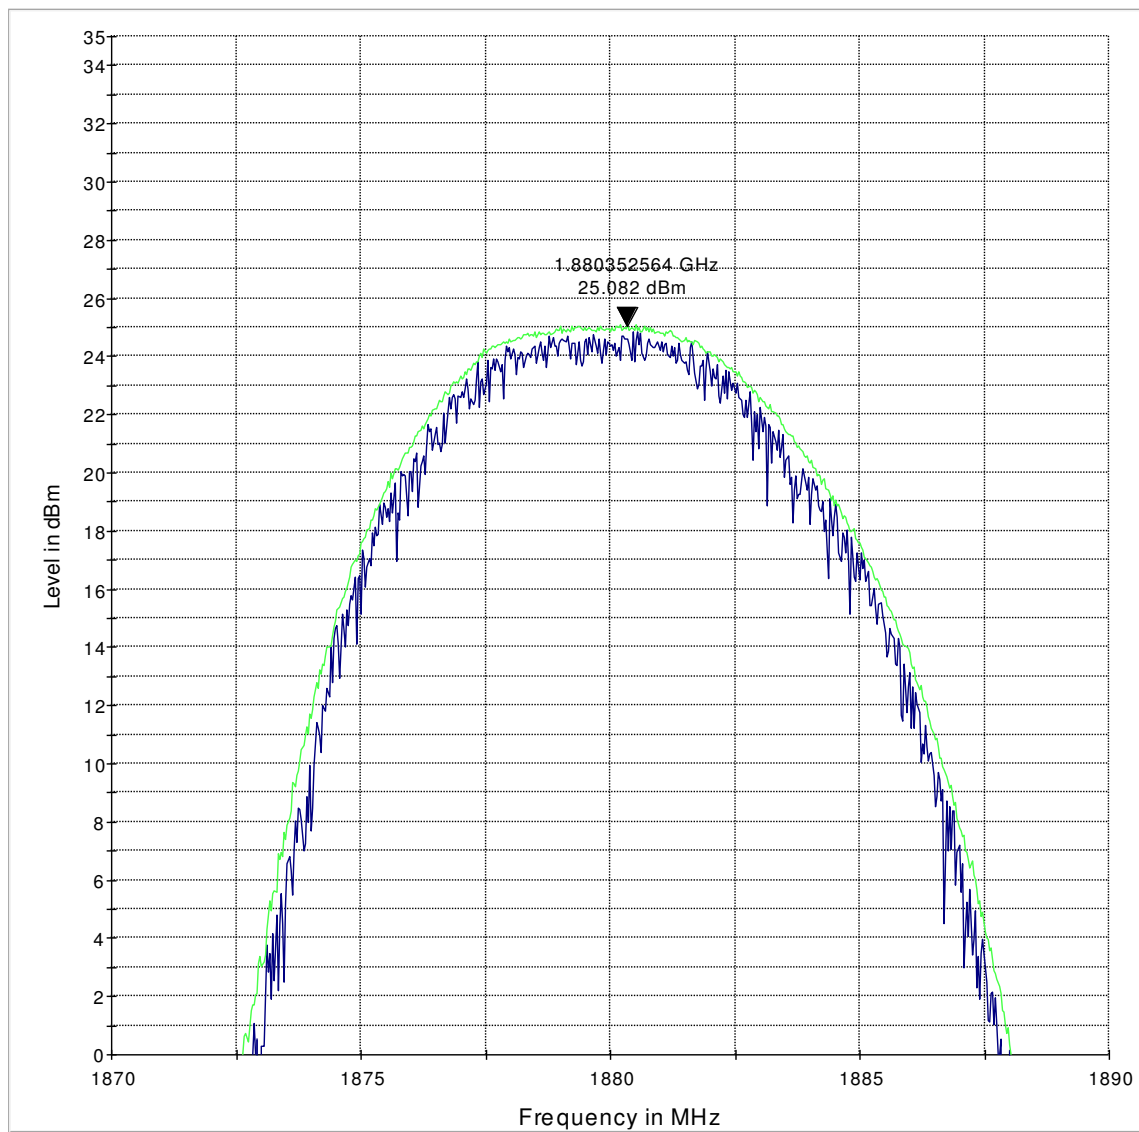

6.5.12 EIRP, UMTS FDD II, Tx: Ch. High

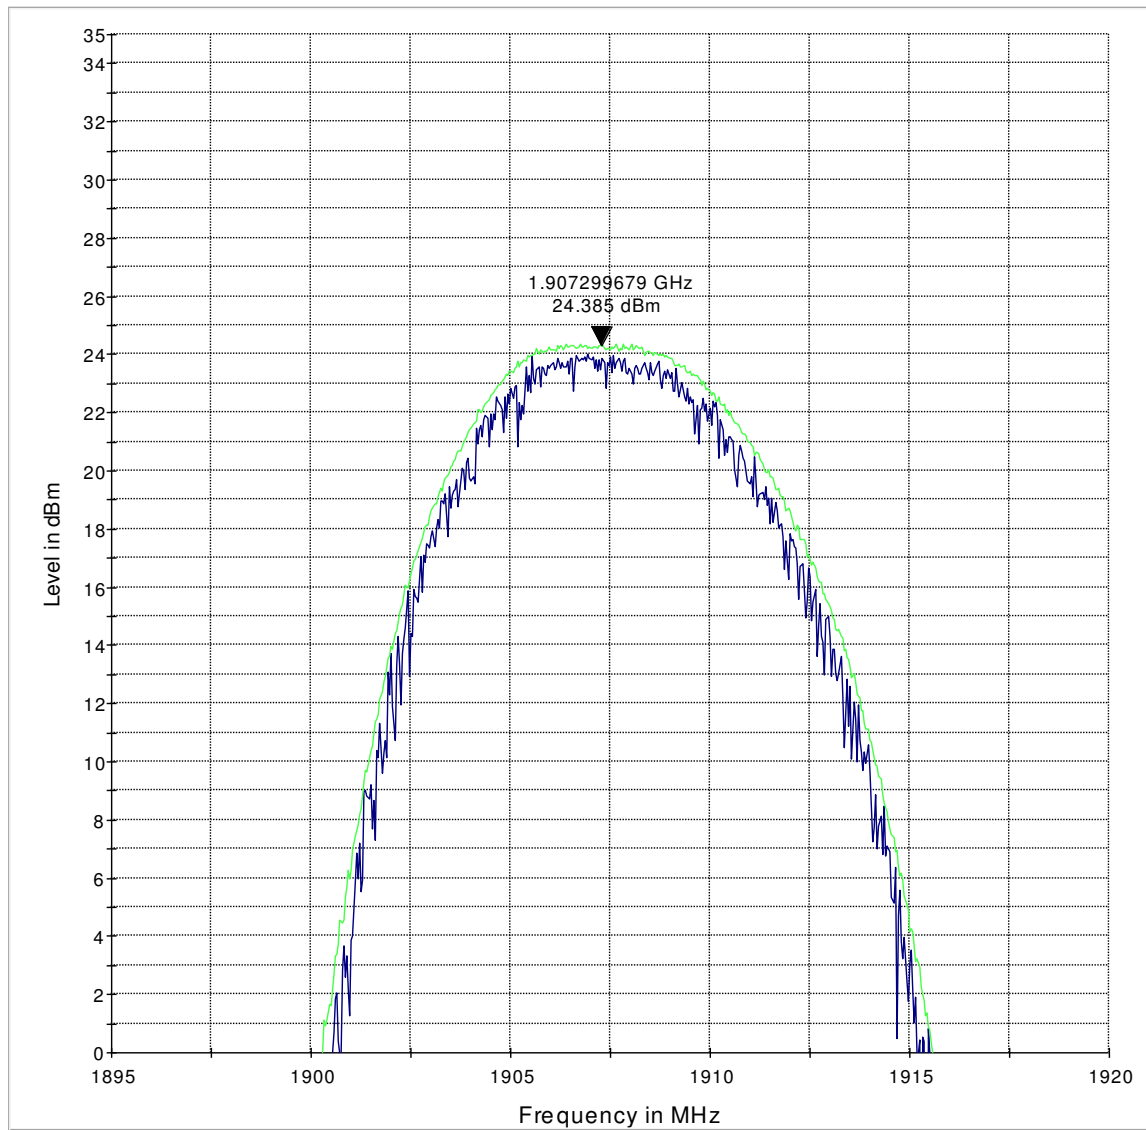

7 Spurious Emissions Radiated

7.1 References:

FCC: CFR Part 2.1053, CFR Part 22.917, CFR Part 24.238,
IC: RSS-Gen issue 4, section 6.13; RSS-132 issue 3, section 5.5; RSS-133 issue 6, section 6.5

7.2 Limits:

(a) *Out of band emissions.* The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. For all power levels +30dBm to 0dBm, this becomes a constant specification of -13dBm.

7.2.1 FCC 22.917 Emission limitations for cellular equipment.

The rules in this section govern the spectral characteristics of emissions in the Cellular Radiotelephone Service.

(b) *Measurement procedure.* Compliance with these provisions is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater. In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required measurement bandwidth (*i.e.* 100 kHz of 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

7.2.2 FCC 24.238 Emission limitations for Broadband PCS equipment.

The rules in this section govern the spectral characteristics of emissions in the Broadband Personal Communications Service.

(b) *Measurement procedure.* Compliance with these provisions is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required measurement bandwidth (*i.e.* 100 kHz of 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.


7.2.3 RSS-132 Section 5.5.1.1 and RSS-133 Section 6.5.1

In the first 1.0 MHz band immediately outside and adjacent to the licensee's frequency block, the power of emissions per any 1% of the emission bandwidth shall be attenuated below the transmitter output power P (in watts) by at least $43 + 10 \log_{10}(P)$, dB. After the first 1.0 MHz, the power of emissions shall be attenuated below the transmitter output power by at least $43 + 10 \log_{10}(P)$, dB, in any 100 kHz bandwidth.

After the first 1.5 MHz, the power of emissions shall be attenuated below the transmitter output power by at least $43 + 10 \log_{10}(P)$, dB, in any MHz of bandwidth.

7.3 Radiated out of band measurement procedure:

Ref: TIA-603C 2004- 2.2.12 Unwanted emissions: Radiated Spurious

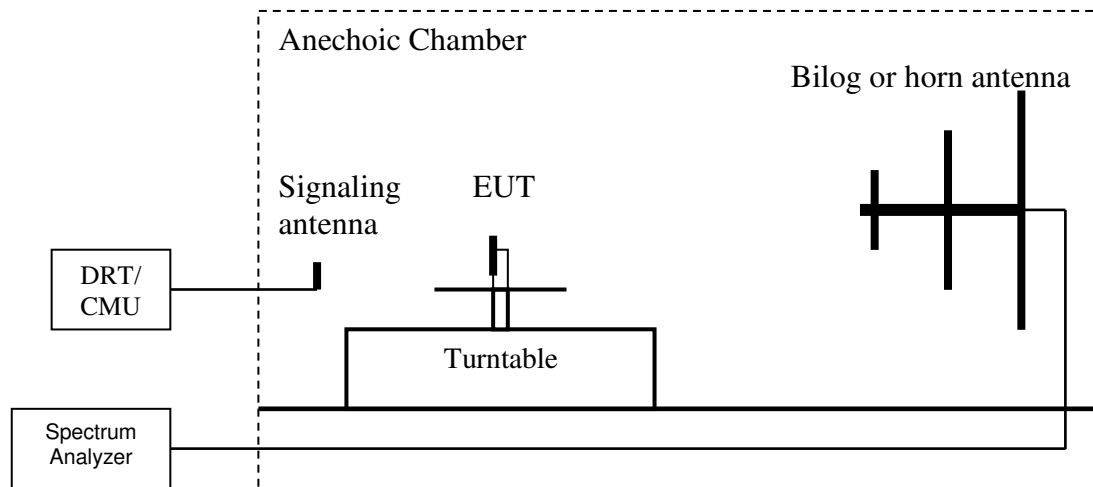

1. Connect the equipment as shown in the above diagram with the EUT's antenna in a horizontal orientation.
2. Adjust the settings of the Digital Radio Communication Tester (DRT) to set the EUT to its maximum power at the required channel.
3. Set the spectrum analyzer to measure peak hold with the required settings.
4. Place the measurement antenna in a horizontal orientation. Rotate the EUT 360°. Raise the measurement antenna up to 4 meters in 0.5 meters increments and rotate the EUT 360° at each height to maximize all emissions. Measure and record all spurious emissions (LVL) up to the tenth harmonic of the carrier frequency.
5. Replace the EUT with a horizontally polarized half wave dipole or known gain antenna. The center of the antenna should be at the same location as the center of the EUT's antenna.
6. Connect the antenna to a signal generator with known output power and record the path loss in dB (**LOSS**). **LOSS** = Generator Output Power (dBm) – Analyzer reading (dBm).
7. Determine the level of spurious emissions using the following equation:
Spurious (dBm) = **LVL** (dBm) + **LOSS** (dB):
8. Repeat steps 4, 5 and 6 with all antennas vertically polarized.
9. Determine the level of spurious emissions using the following equation:
Spurious (dBm) = **LVL** (dBm) + **LOSS** (dB):
10. Measurements are to be performed with the EUT set to the low, middle and high channel of each frequency band.
(Note: Steps 5 and 6 above are performed prior to testing and **LOSS** is recorded by test software. Steps 3, 4 and 7 above are performed with test software.)

7.3.1 Sample Calculations for Radiated Measurements: Power Measurements using Substitution Procedure:

The measurement on the Spectrum Analyzer is used as a basis for the Substitution procedure. The EUT is replaced with a Signal Generator and an antenna. The setting on the Signal Generator is varied until the Spectrum Analyzer displays the original reading. EIRP is calculated as-

EIRP (dBm)= Signal Generator setting (dBm)- Cable Loss (dB)+ Antenna Gain (dBi). Example below.

| Frequency (MHz) | Measured SA (dBμV) | Signal Generator setting (dBm) | Antenna Gain (dBi) | Dipole Gain (dBd) | Cable Loss (dB) | EIRP (dBm) |
|-----------------|--------------------|--------------------------------|--------------------|-------------------|-----------------|------------|
| 1000 | 95.5 | 24.5 | 6.5 | 0 | 3.5 | 27.5 |

7.3.2 Spectrum Analyzer Settings

Settings for FCC 22

| | 30MHz – 1 GHz | 1 – 1.58 GHz | 1.58 – 9 GHz |
|----------------------|---------------|--------------|--------------|
| Resolution Bandwidth | 100 kHz | 1 MHz | 1 MHz |
| Video Bandwidth | 100 kHz | 1 MHz | 1 MHz |
| Detector | Peak | Peak | Peak |
| Trace Mode | Max Hold | Max Hold | Max Hold |
| Sweep Time | Auto | Auto | Auto |

Settings for FCC 24

| | 30MHz – 1 GHz | 1 – 2.7 GHz | 2.7 – 18 GHz | 18 – 19.1 GHz |
|----------------------|---------------|-------------|--------------|---------------|
| Resolution Bandwidth | 100 kHz | 1 MHz | 1 MHz | 1 MHz |
| Video Bandwidth | 100 kHz | 1 MHz | 1 MHz | 1 MHz |
| Detector | Peak | Peak | Peak | Peak |
| Trace Mode | Max Hold | Max Hold | Max Hold | Max Hold |
| Sweep Time | Auto | Auto | Auto | Auto |

7.4 Test Results

7.4.1 GSM 850

| Harmonic | Tx ch-128 Freq. (MHz) | Level (dBm) | Tx ch-190 Freq. (MHz) | Level (dBm) | Tx ch-251 Freq. (MHz) | Level (dBm) | Limit FCC and IC (dBm) |
|---|--------------------------|----------------|--------------------------|----------------|--------------------------|-------------|------------------------------|
| 2 | 1648.4 | -41.23 | 1673.2 | NF | 1697.6 | NF | -13 |
| 3 | 2472.6 | NF | 2509.8 | -41.3 | 2546.4 | -45.3 | |
| 4 | 3296.8 | NF | 3346.4 | NF | 3395.2 | NF | |
| 5 | 4121 | NF | 4183 | NF | 4244 | NF | |
| 6 | 4945.2 | NF | 5019.6 | NF | 5092.8 | NF | |
| 7 | 5769.4 | NF | 5856.2 | NF | 5941.6 | NF | |
| 8 | 6593.6 | NF | 6692.8 | NF | 6790.4 | NF | |
| 9 | 7417.8 | NF | 7529.4 | NF | 7639.2 | NF | |
| 10 | 8242 | NF | 8366 | NF | 8488 | NF | |
| NF = Noise Floor Measurement Uncertainty: ±3dB | | | | | | | |

7.4.2 UMTS FDD BAND V

| Harmonic | Tx ch-128 Freq. (MHz) | Level (dBm) | Tx ch-190 Freq. (MHz) | Level (dBm) | Tx ch-251 Freq. (MHz) | Level (dBm) | Limit FCC and IC (dBm) |
|---|--------------------------|----------------|--------------------------|----------------|--------------------------|-------------|------------------------------|
| 2 | 1648.4 | NF | 1673.2 | NF | 1697.6 | NF | -13 |
| 3 | 2472.6 | NF | 2509.8 | NF | 2546.4 | NF | |
| 4 | 3296.8 | NF | 3346.4 | NF | 3395.2 | NF | |
| 5 | 4121 | NF | 4183 | NF | 4244 | NF | |
| 6 | 4945.2 | NF | 5019.6 | NF | 5092.8 | NF | |
| 7 | 5769.4 | NF | 5856.2 | NF | 5941.6 | NF | |
| 8 | 6593.6 | NF | 6692.8 | NF | 6790.4 | NF | |
| 9 | 7417.8 | NF | 7529.4 | NF | 7639.2 | NF | |
| 10 | 8242 | NF | 8366 | NF | 8488 | NF | |
| NF = Noise Floor Measurement Uncertainty: ±3dB | | | | | | | |

7.4.3 GSM 1900


| Harmonic | Tx ch-512 Freq. (MHz) | Level (dBm) | Tx ch-661 Freq. (MHz) | Level (dBm) | Tx ch-810 Freq. (MHz) | Level (dBm) | Limit FCC and IC (dBm) |
|---|--------------------------|----------------|--------------------------|----------------|--------------------------|----------------|------------------------------|
| 2 | 3700.4 | NF | 3760 | NF | 3819.6 | NF | -13 |
| 3 | 5550.6 | NF | 5640 | NF | 5729.4 | NF | |
| 4 | 7400.8 | NF | 7520 | NF | 7639.2 | NF | |
| 5 | 9251 | NF | 9400 | NF | 9549 | NF | |
| 6 | 11101.2 | NF | 11280 | NF | 11458.8 | NF | |
| 7 | 12951.4 | NF | 13160 | NF | 13368.6 | NF | |
| 8 | 14801.6 | NF | 15040 | NF | 15278.4 | NF | |
| 9 | 16651.8 | NF | 16920 | NF | 17188.2 | NF | |
| 10 | 18502 | NF | 18800 | NF | 19098 | NF | |
| NF = Noise Floor Measurement Uncertainty: ±3dB | | | | | | | |

7.4.4 UMTS FDD BAND II


| Harmonic | Tx ch-512 Freq. (MHz) | Level (dBm) | Tx ch-661 Freq. (MHz) | Level (dBm) | Tx ch-810 Freq. (MHz) | Level (dBm) | Limit FCC and IC (dBm) |
|---|--------------------------|----------------|--------------------------|----------------|--------------------------|----------------|------------------------------|
| 2 | 3700.4 | NF | 3760 | NF | 3819.6 | NF | -13 |
| 3 | 5550.6 | NF | 5640 | NF | 5729.4 | NF | |
| 4 | 7400.8 | NF | 7520 | NF | 7639.2 | NF | |
| 5 | 9251 | NF | 9400 | NF | 9549 | NF | |
| 6 | 11101.2 | NF | 11280 | NF | 11458.8 | NF | |
| 7 | 12951.4 | NF | 13160 | NF | 13368.6 | NF | |
| 8 | 14801.6 | NF | 15040 | NF | 15278.4 | NF | |
| 9 | 16651.8 | NF | 16920 | NF | 17188.2 | NF | |
| 10 | 18502 | NF | 18800 | NF | 19098 | NF | |
| NF = Noise Floor Measurement Uncertainty: ±3dB | | | | | | | |

Measurement Plots:


7.4.5 GSM 850, Tx: Ch. Low, 30 MHz – 1 GHz

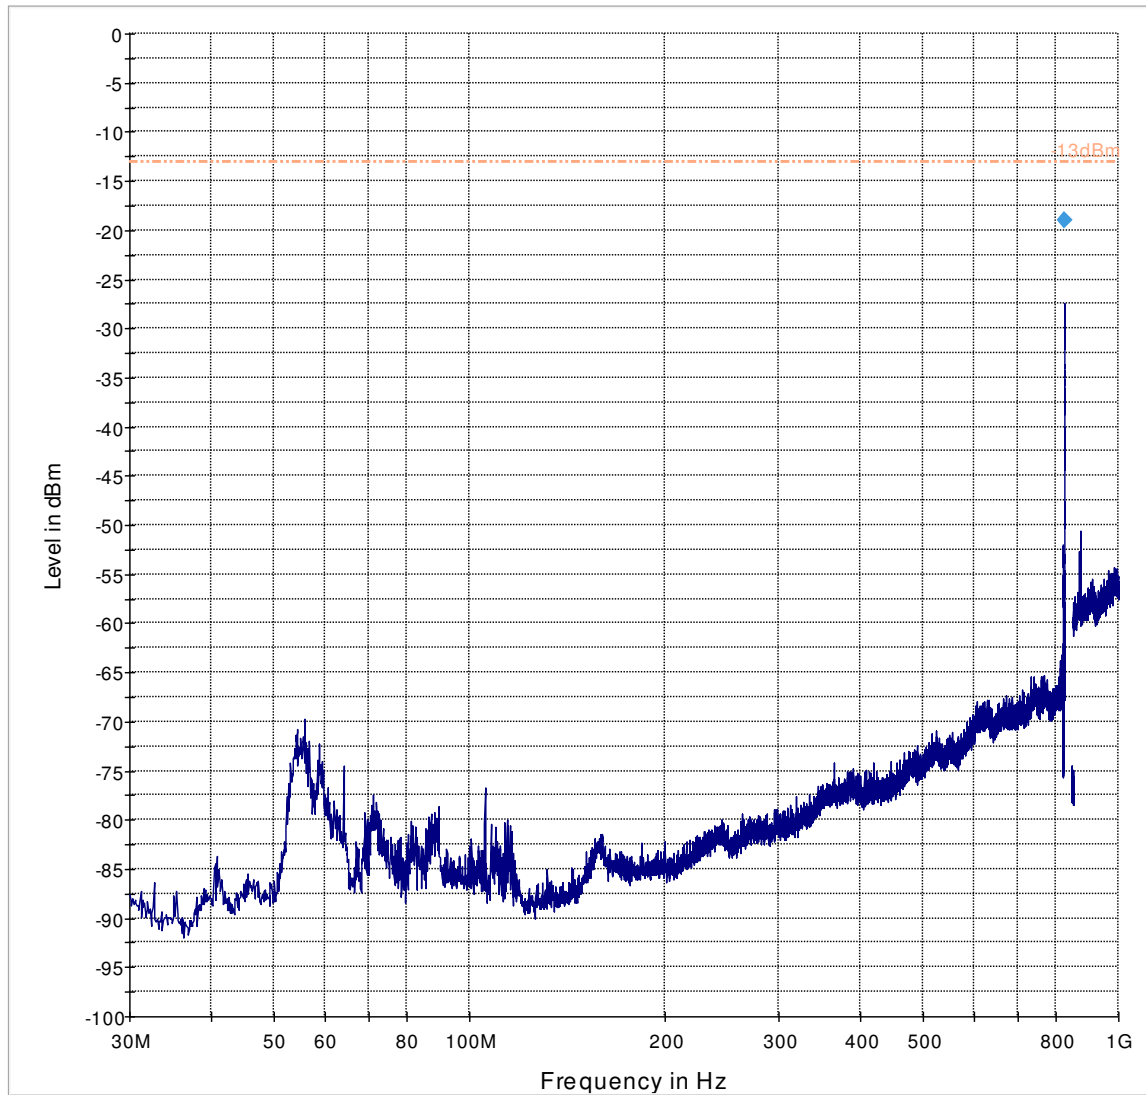


7.4.6 GSM 850, Tx: Ch. Low, 1 GHz – 9 GHz

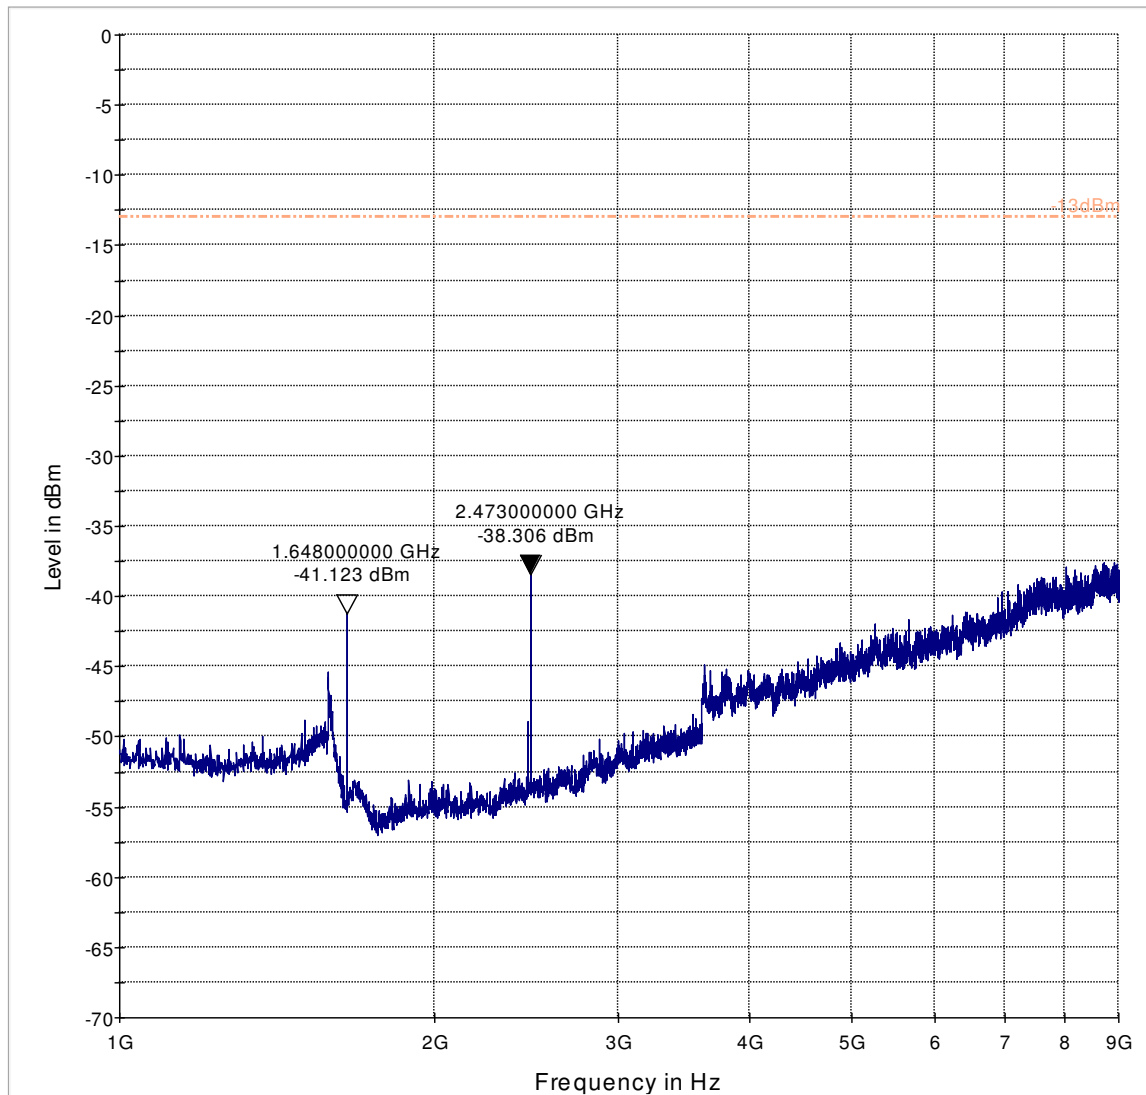


7.4.7 GSM 850, Tx: Ch. Mid, 9 KHz – 30 MHz

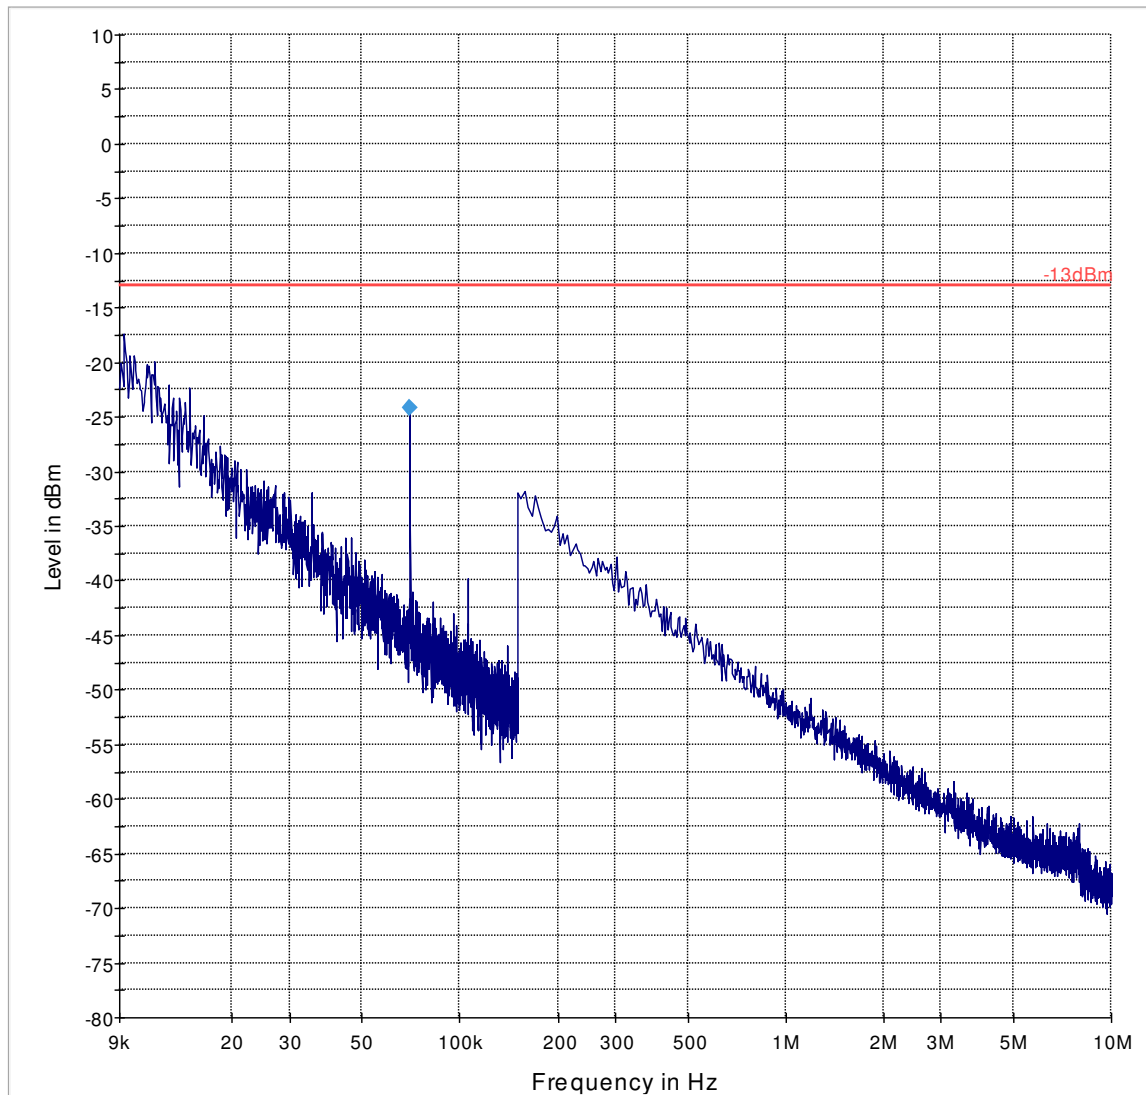


7.4.8 GSM 850, Tx: Ch. Mid, 30 MHz – 1 GHz

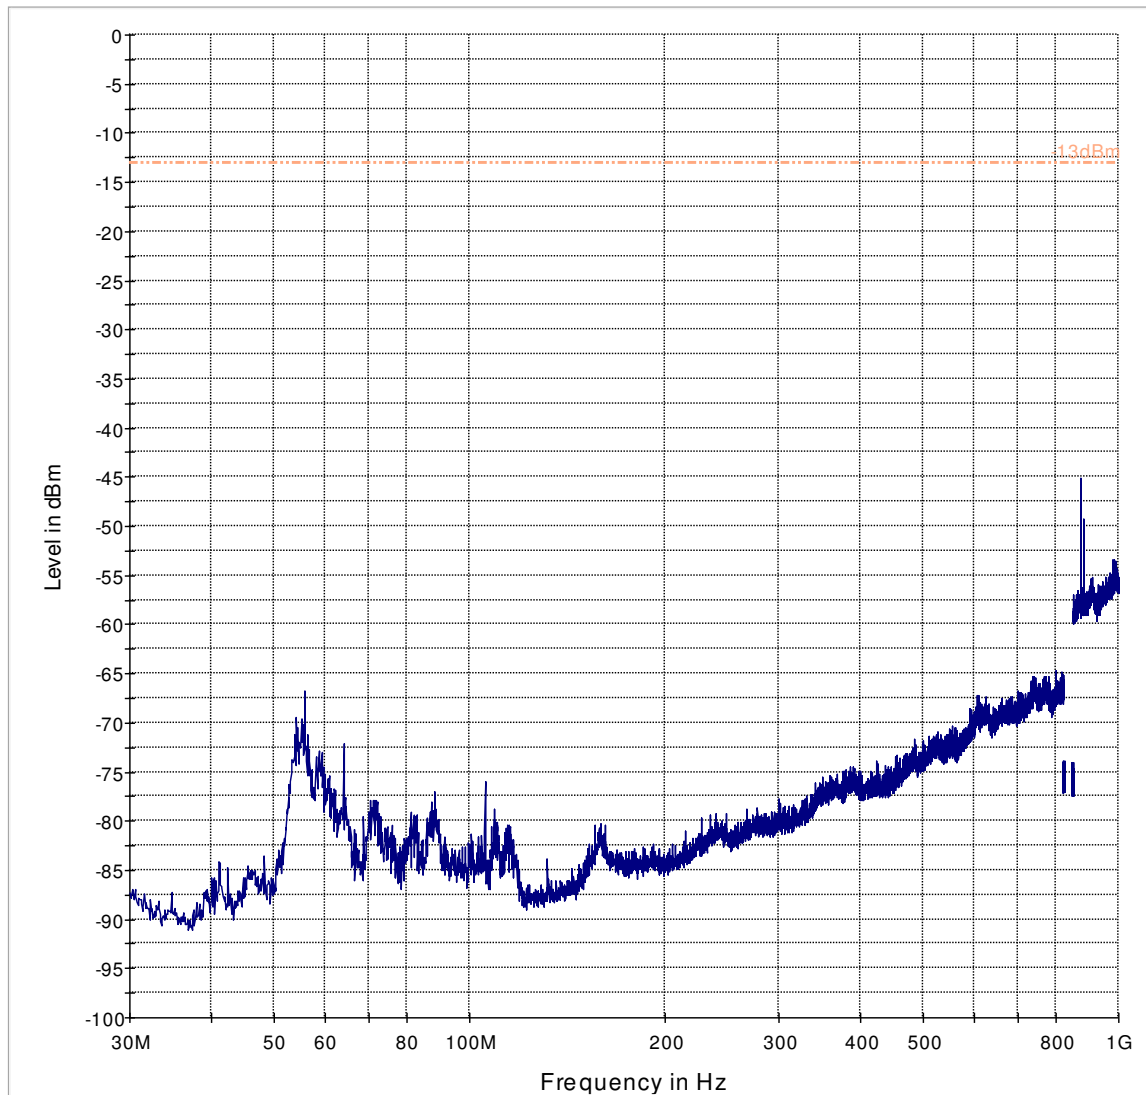


7.4.9 GSM 850, Tx: Ch. Mid, 1 GHz – 9 GHz

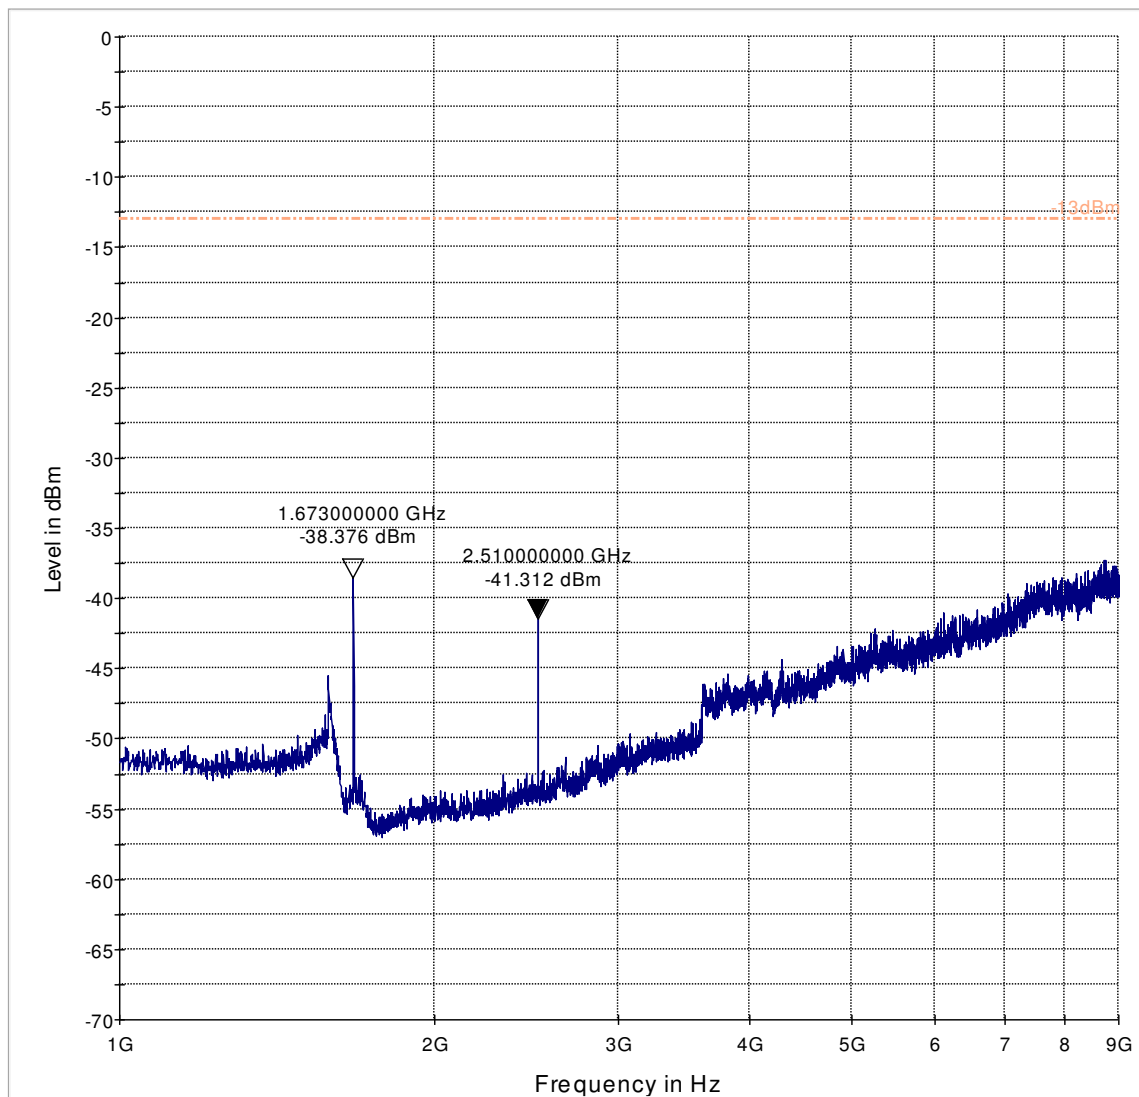


7.4.10 GSM 850, Tx: Ch. High, 30 MHz – 1 GHz

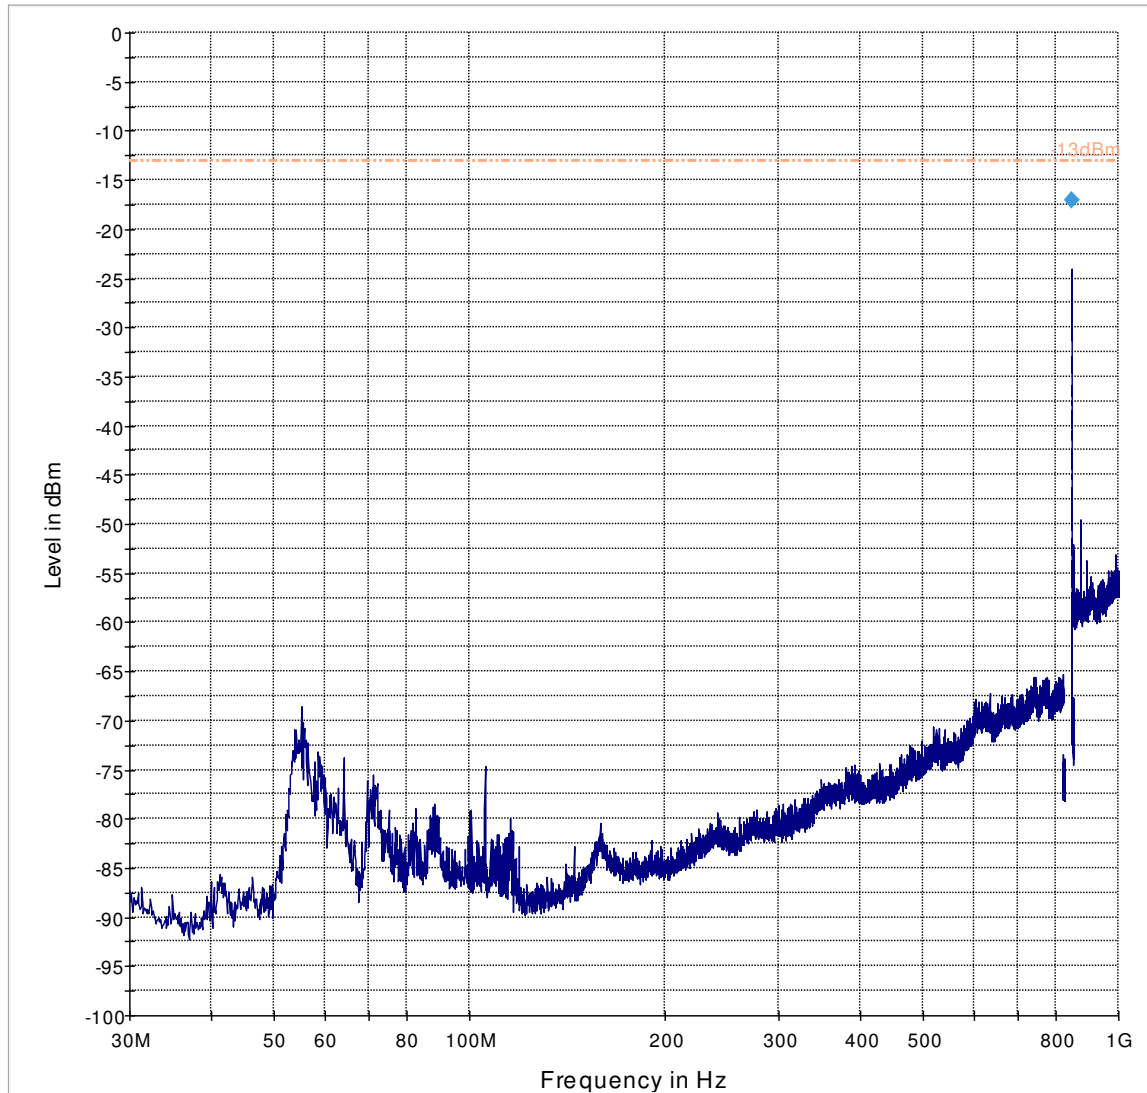


7.4.11 GSM 850, Tx: Ch. High, 1 GHz – 9 GHz

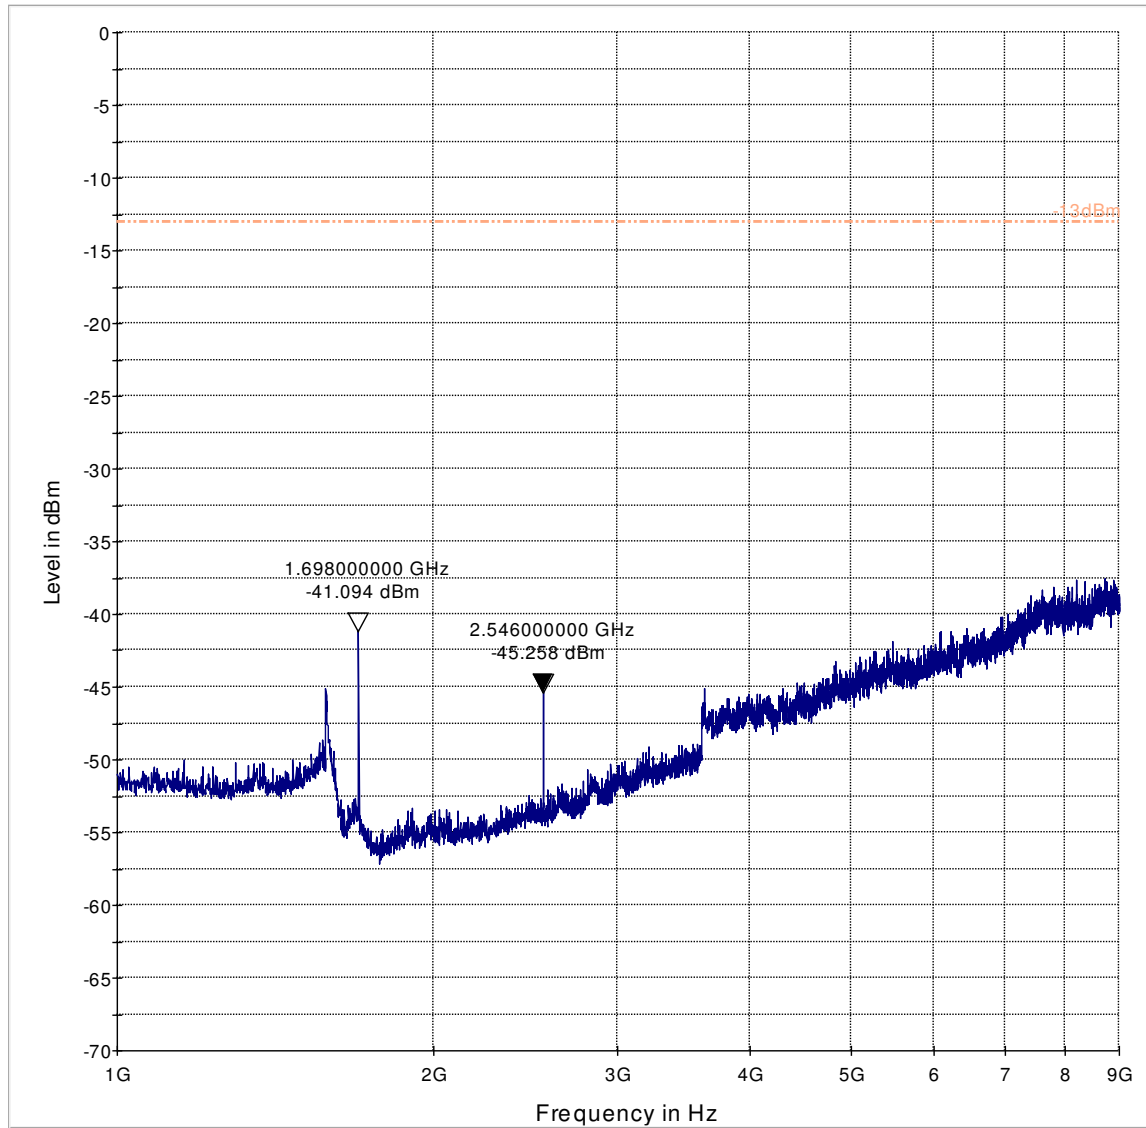


7.4.12 UMTS FDD Band V, Tx: Ch. Low, 30 MHz – 1 GHz

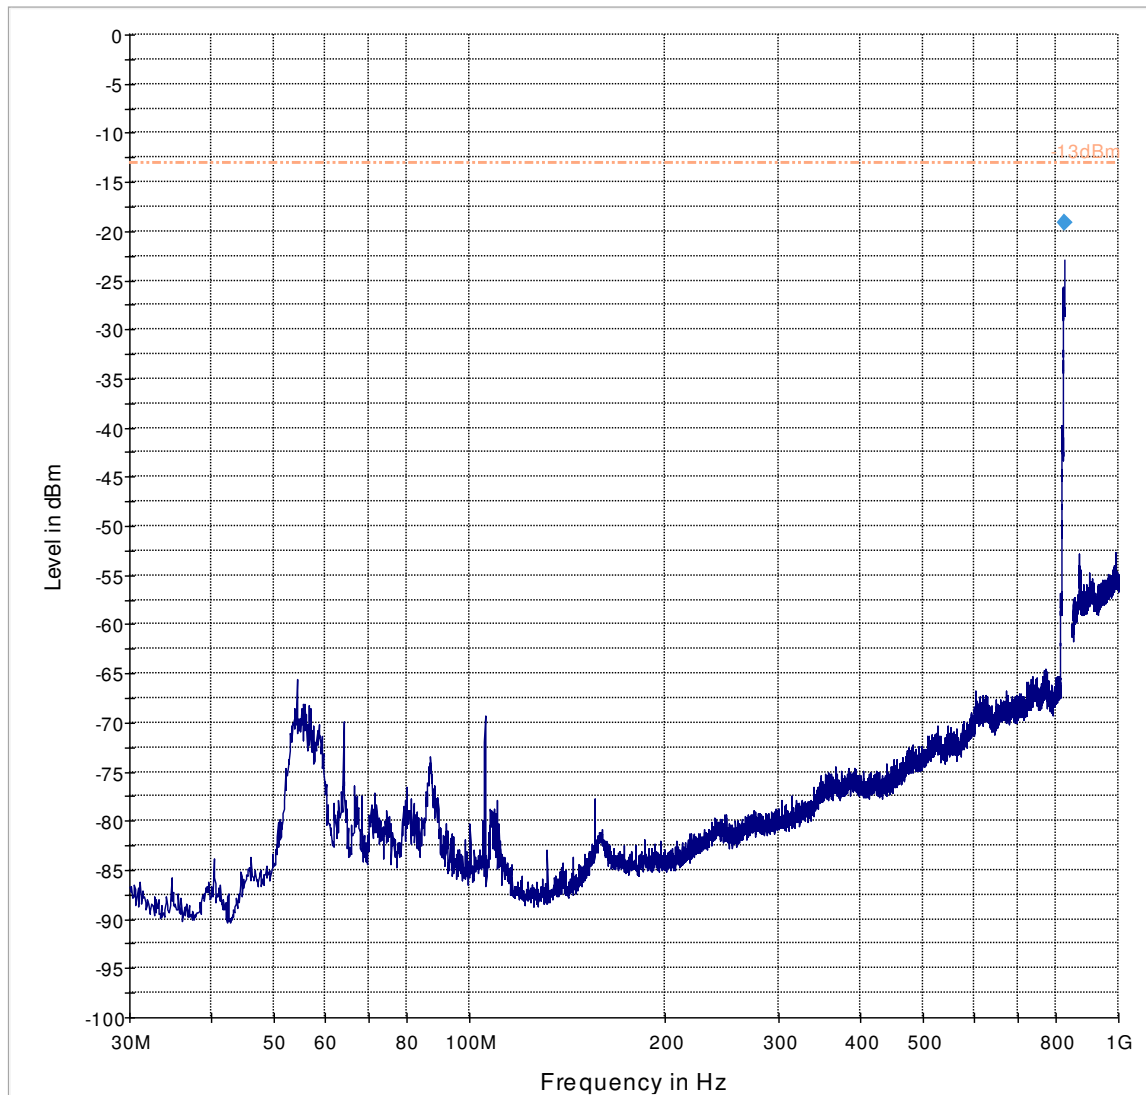


7.4.13 UMTS FDD Band V, Tx: Ch. Low, 1 GHz – 9 GHz

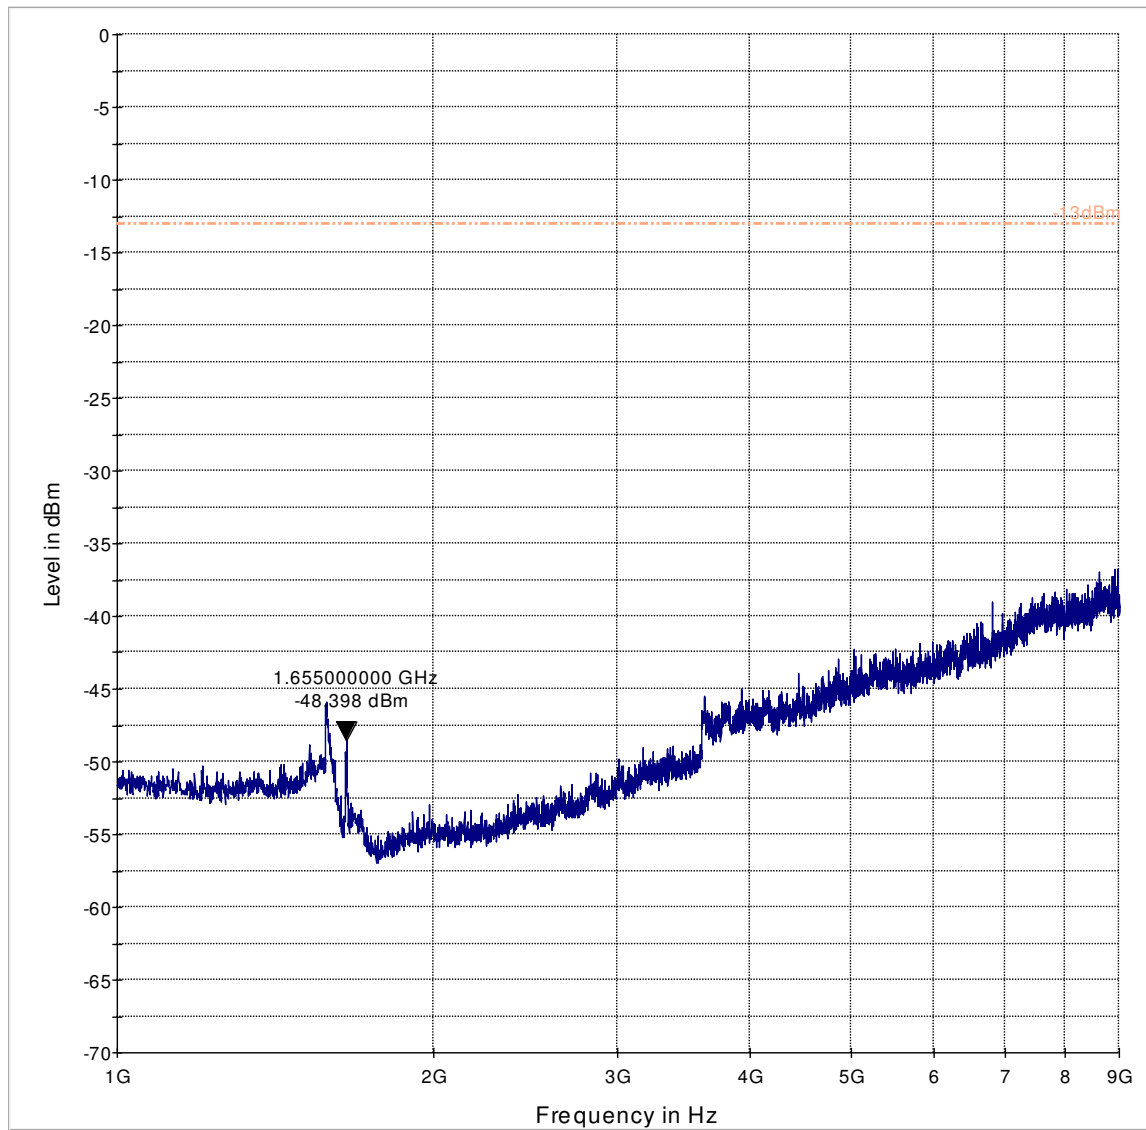


7.4.14 UMTS FDD Band V, Tx: Ch. Mid, 9 KHz – 30 MHz

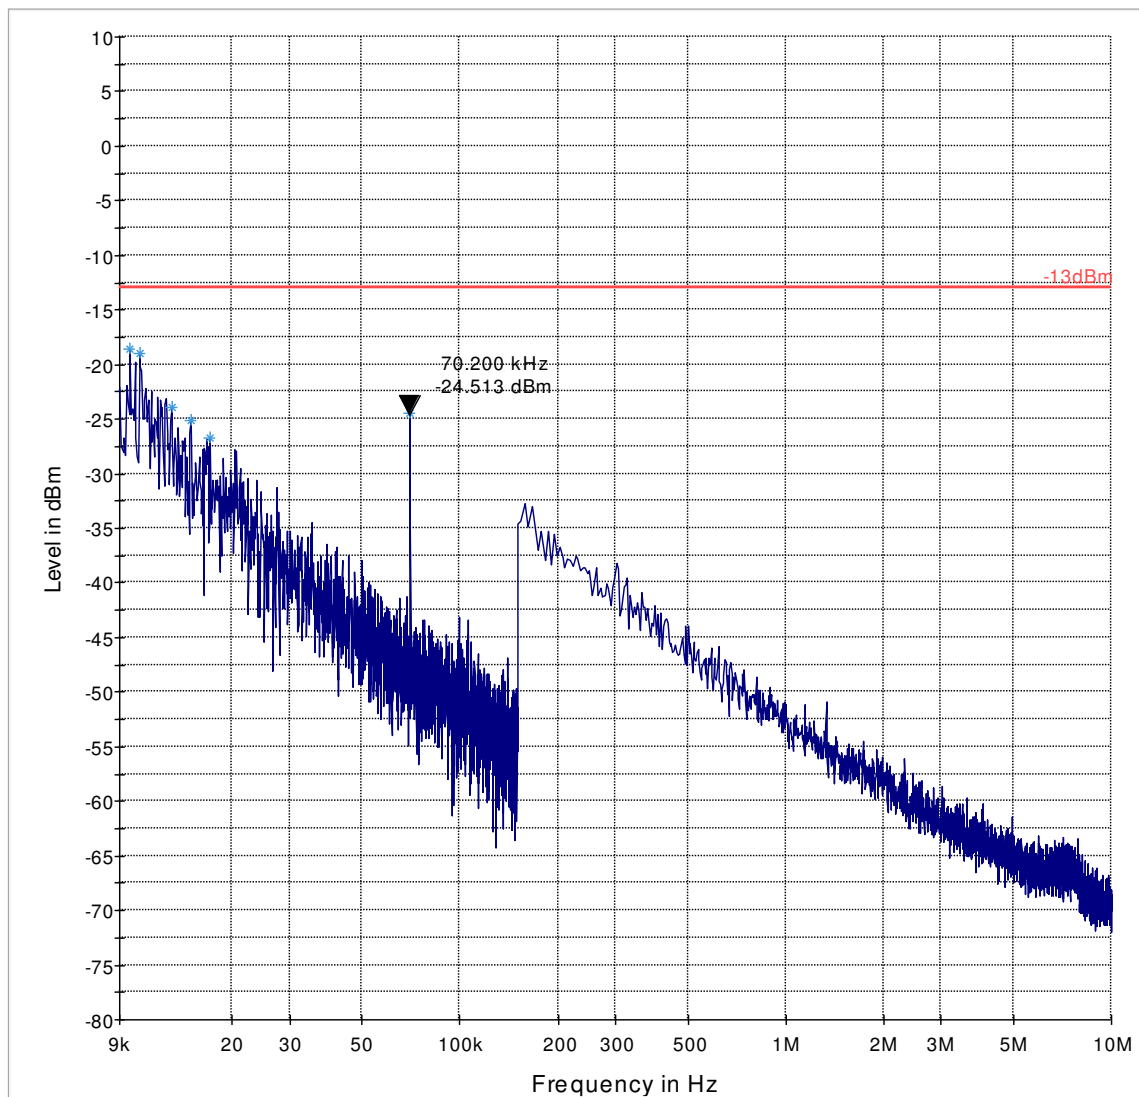


7.4.15 UMTS FDD Band V, Tx: Ch. Mid, 30 MHz – 1 GHz

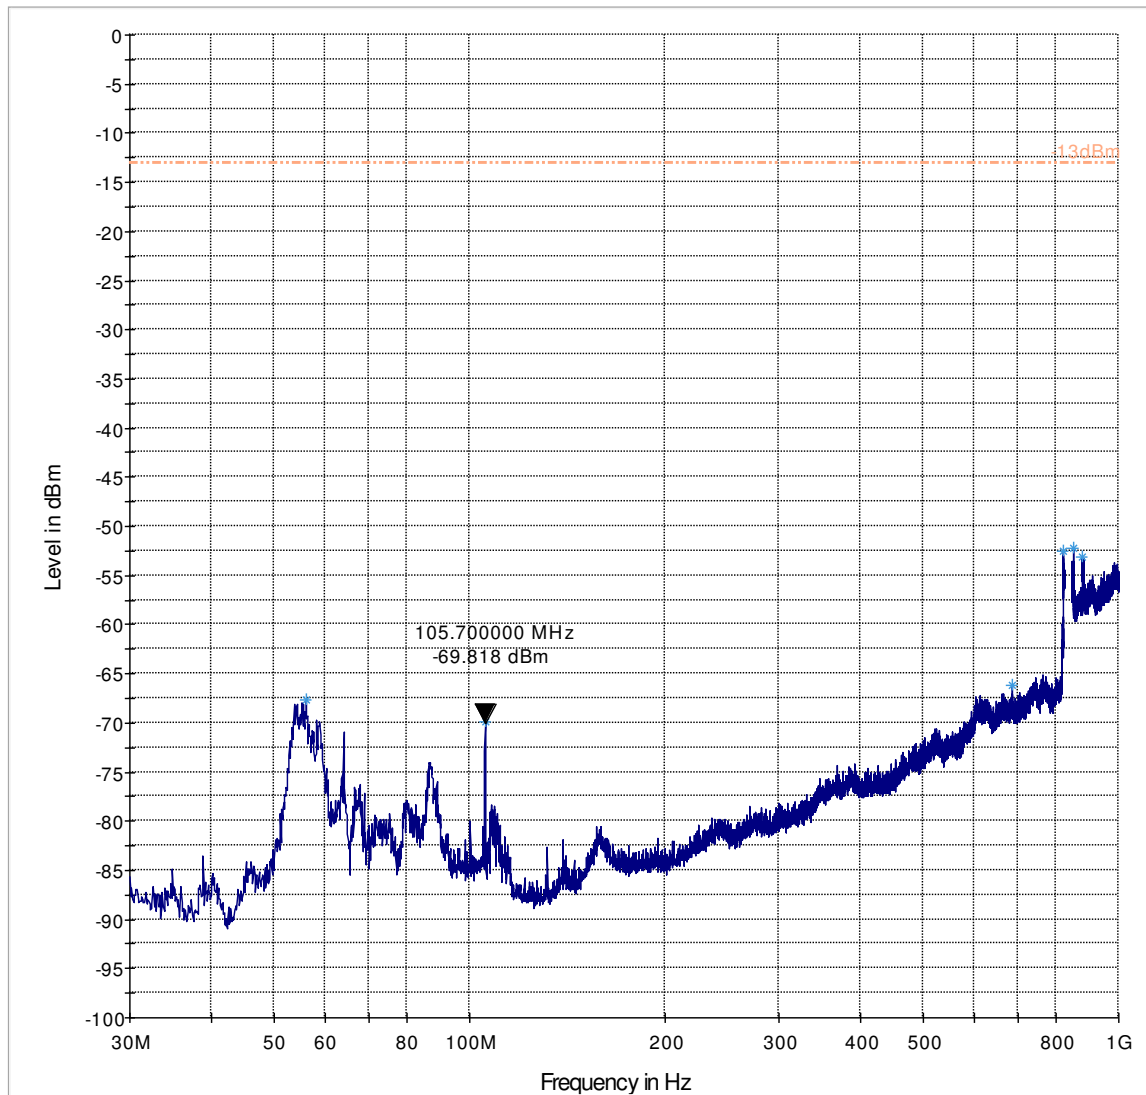


7.4.16 UMTS FDD Band V, Tx: Ch. Mid, 1 GHz – 9 GHz

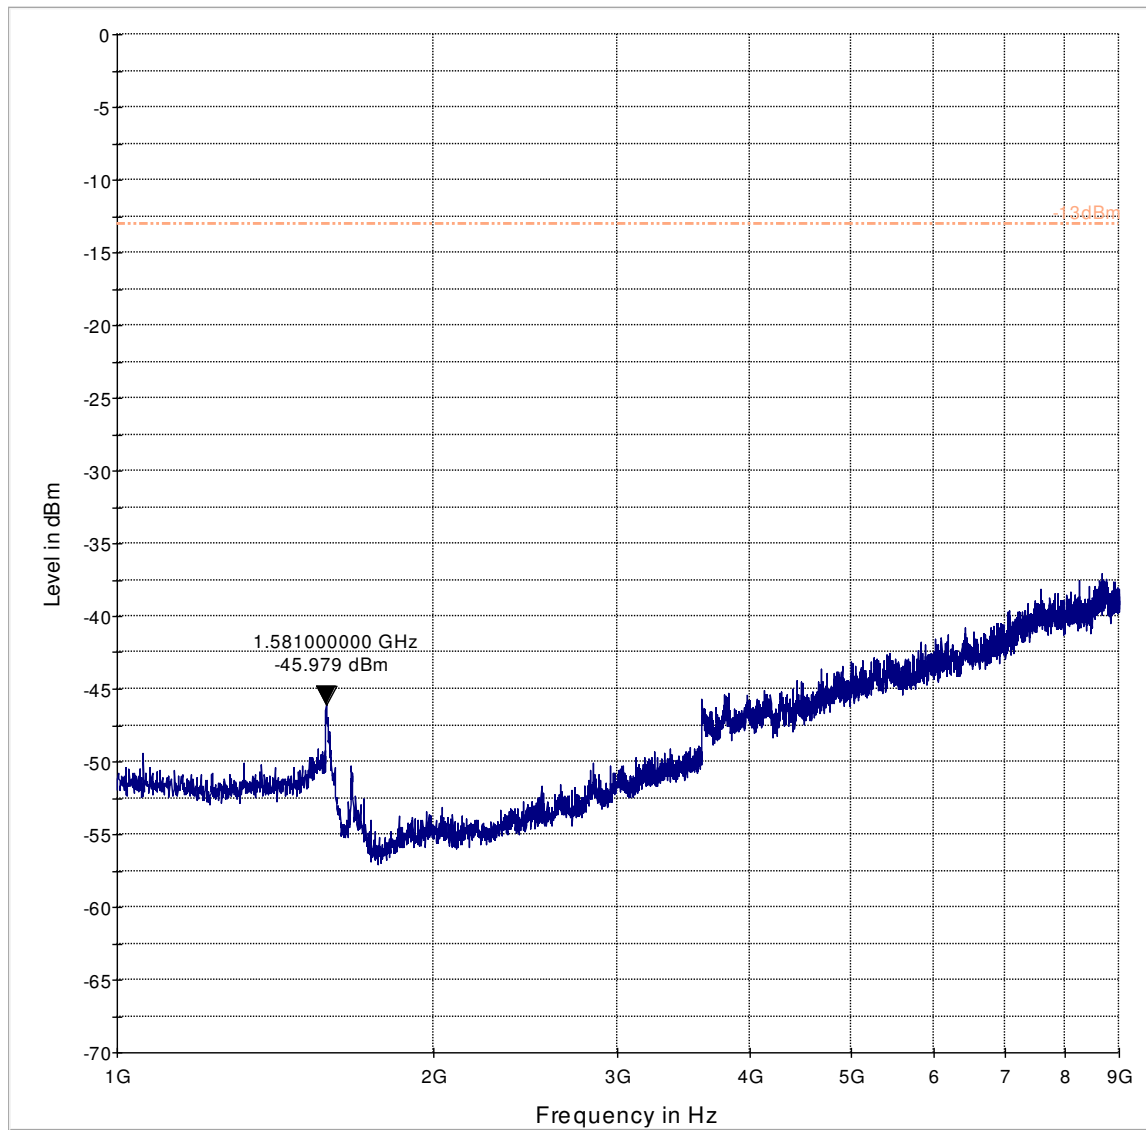


7.4.17 UMTS FDD Band V, Tx: Ch. High, 30 MHz – 1 GHz

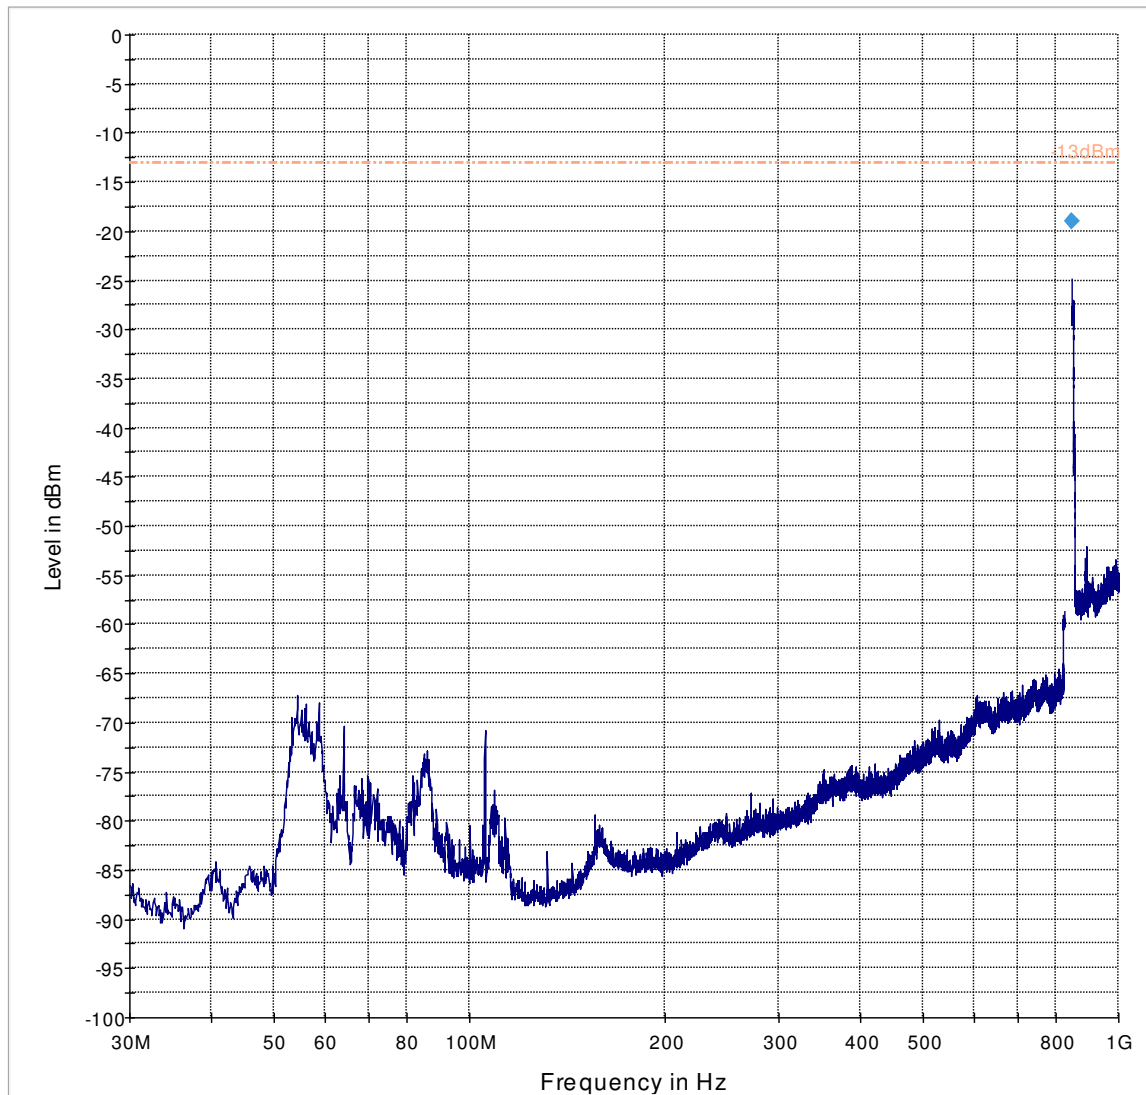


7.4.18 UMTS FDD Band V, Tx: Ch. High, 1 GHz – 9 GHz

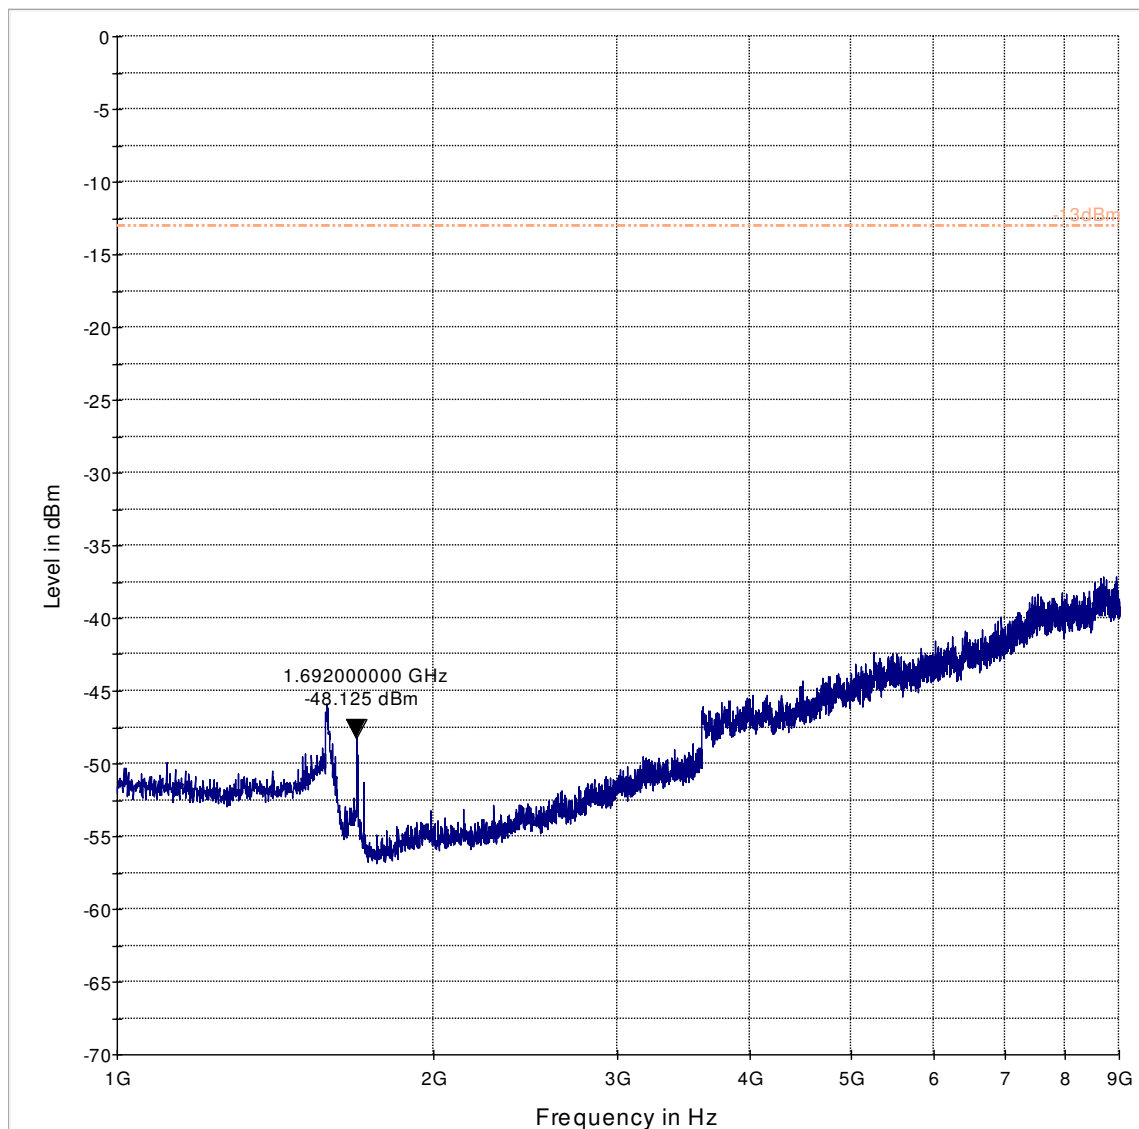


7.4.19 GSM 1900, Tx: Ch. Low, 30 MHz – 1 GHz

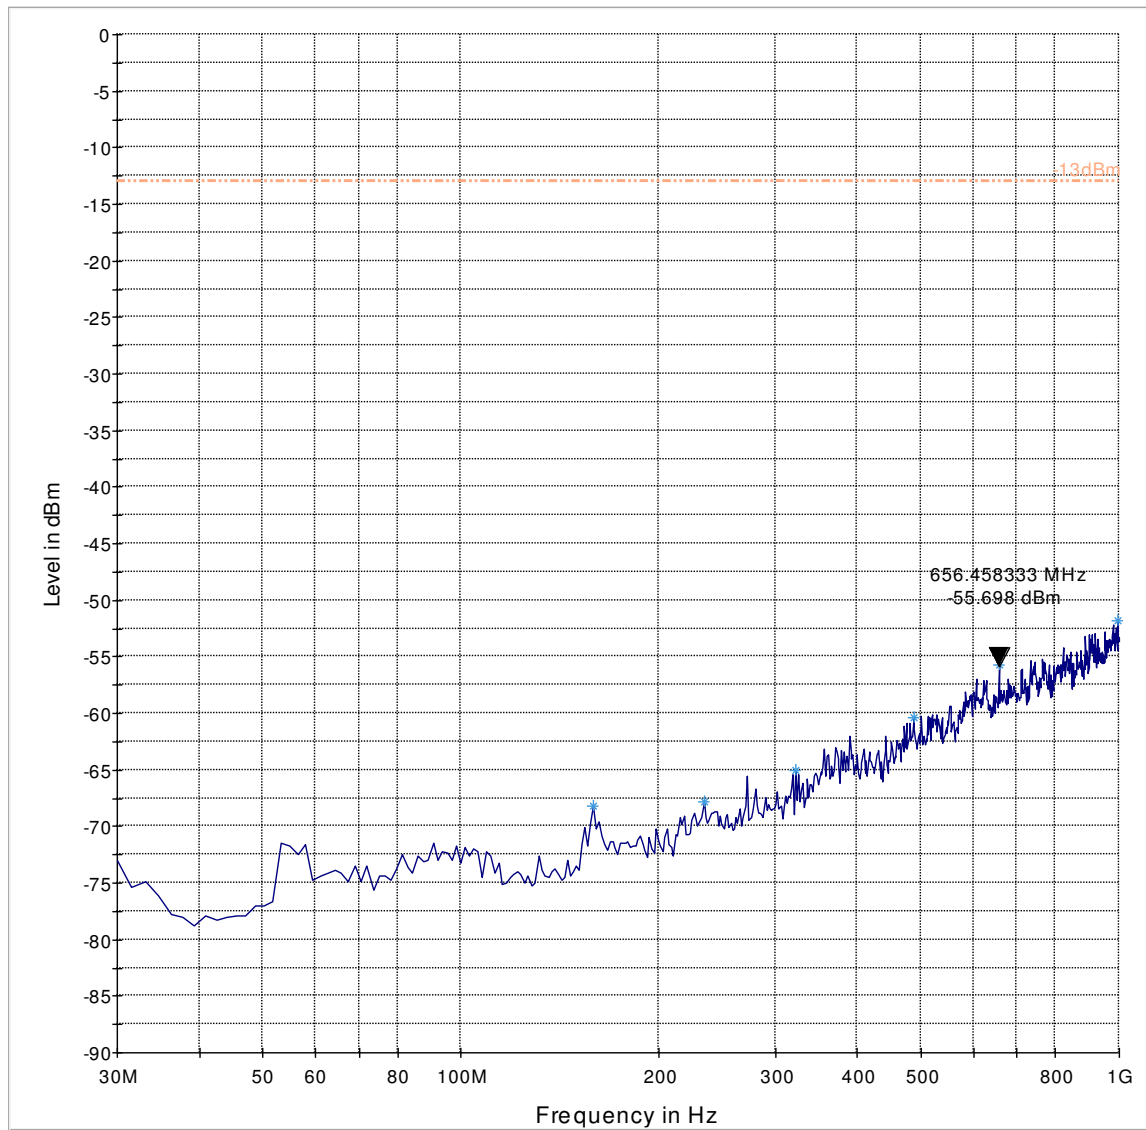


7.4.20 GSM 1900, Tx: Ch. Low, 1 GHz – 18 GHz

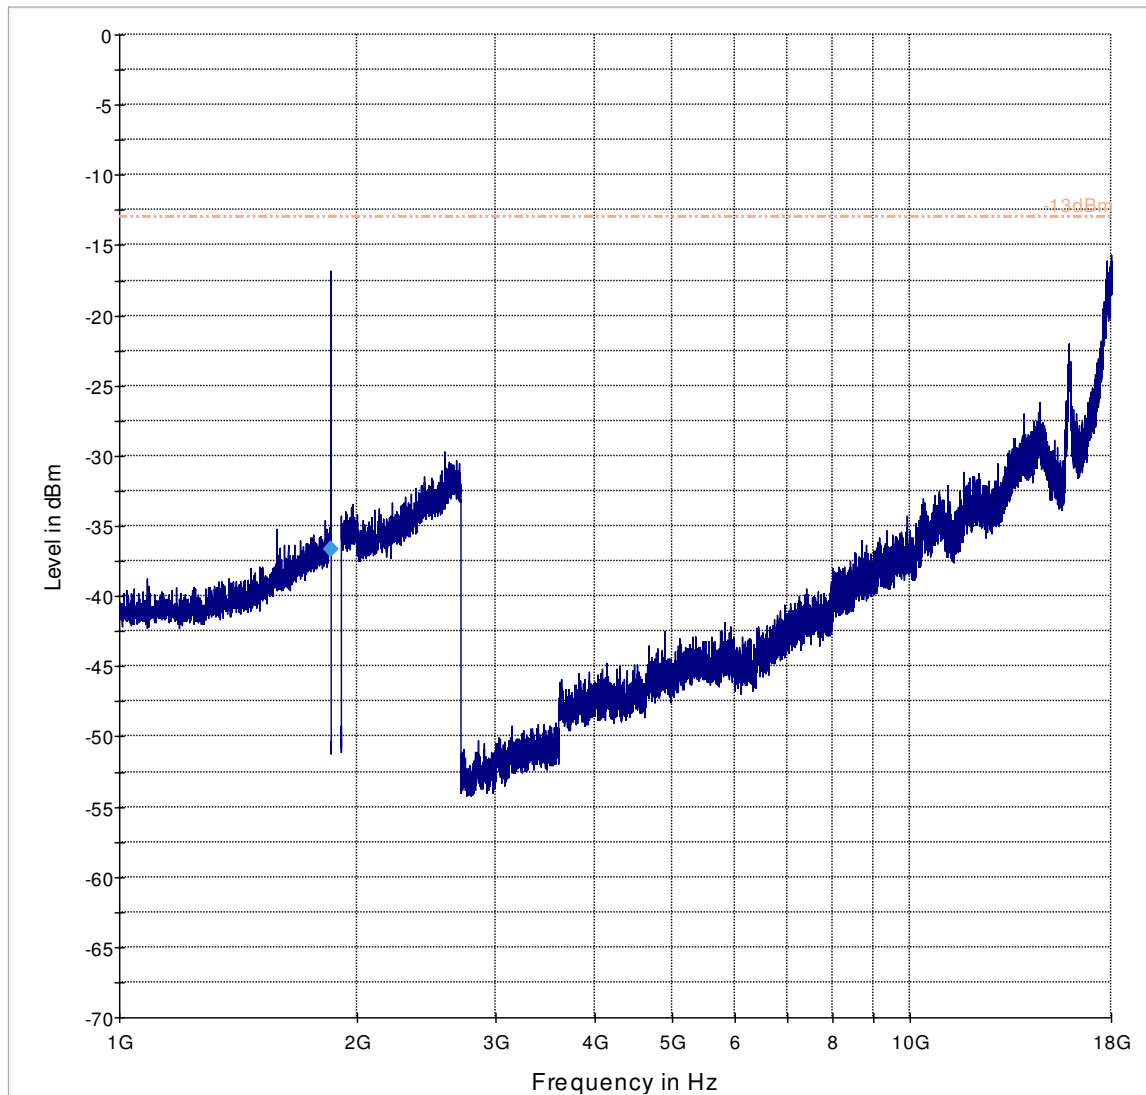


7.4.21 GSM 1900, Tx: Ch. Low, 18 GHz – 22 GHz

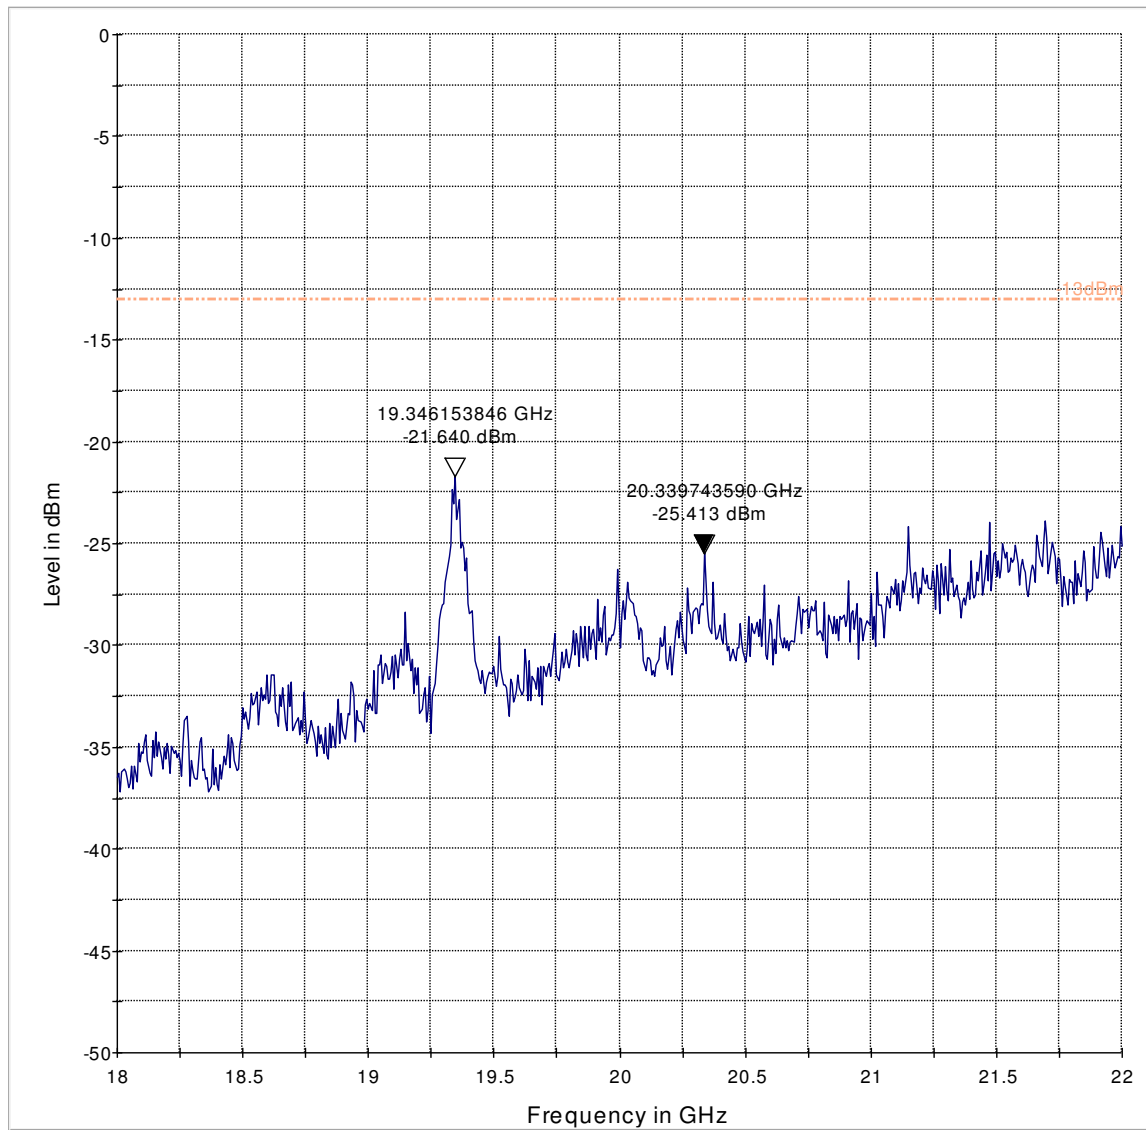


7.4.22 GSM 1900, Tx: Ch. Mid, 9 KHz – 30 MHz

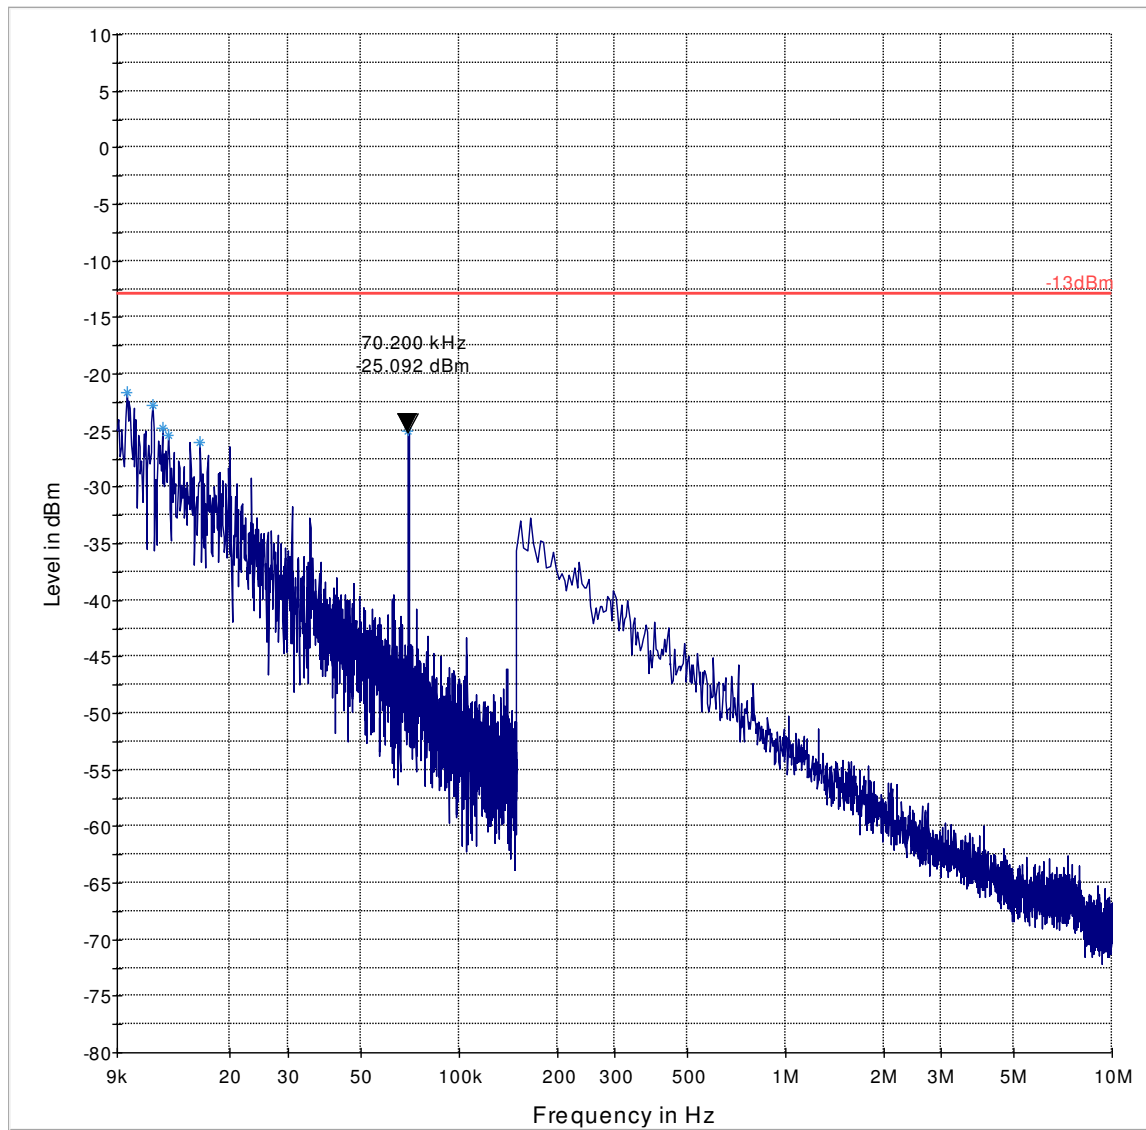


7.4.23 GSM 1900, Tx: Ch. Mid, 30 MHz – 1 GHz

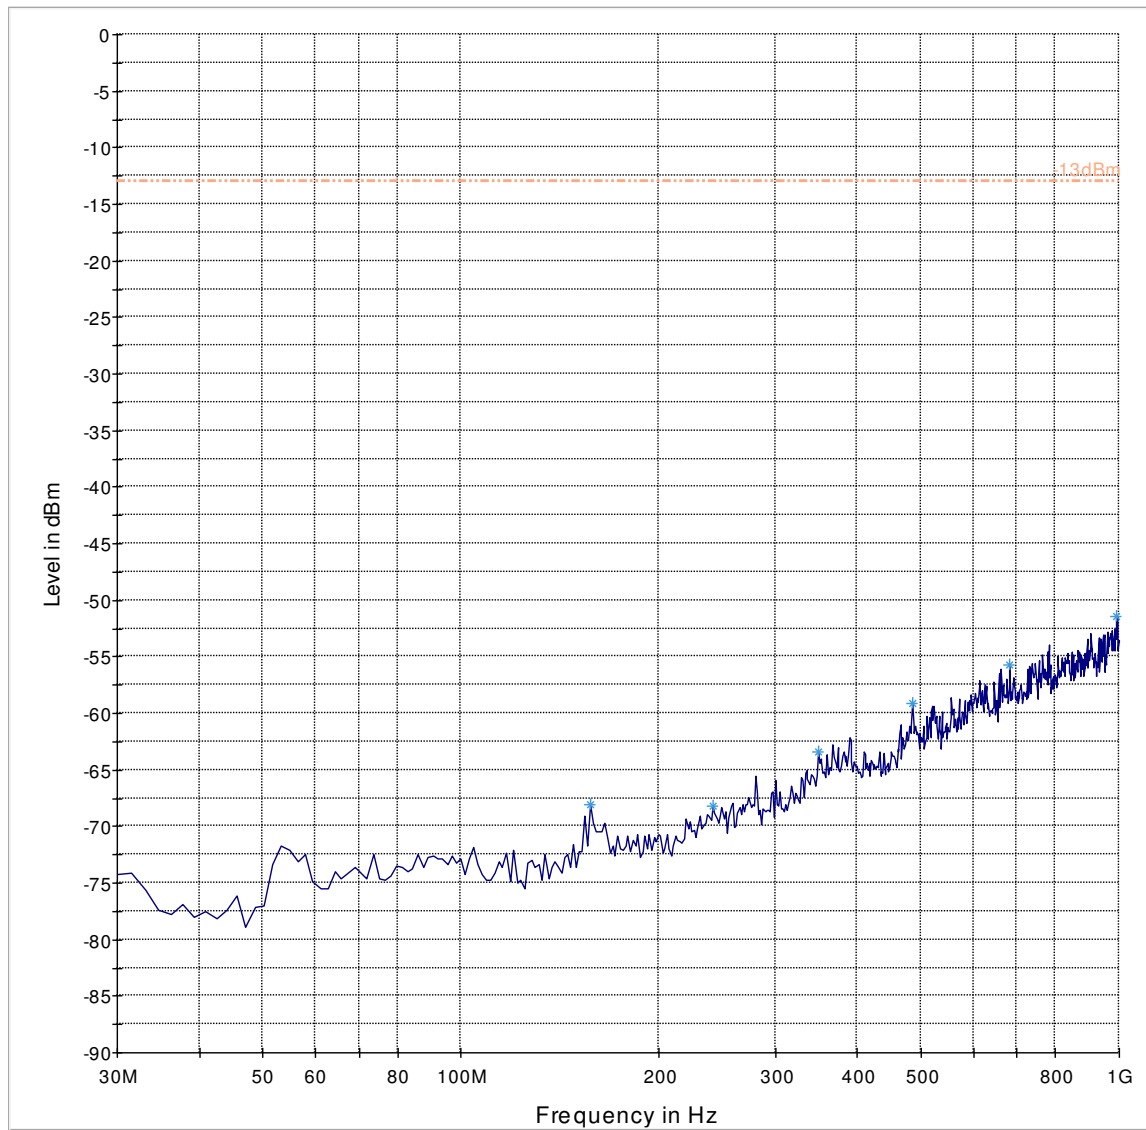


7.4.24 GSM 1900, Tx: Ch. Mid, 1 GHz – 18 GHz

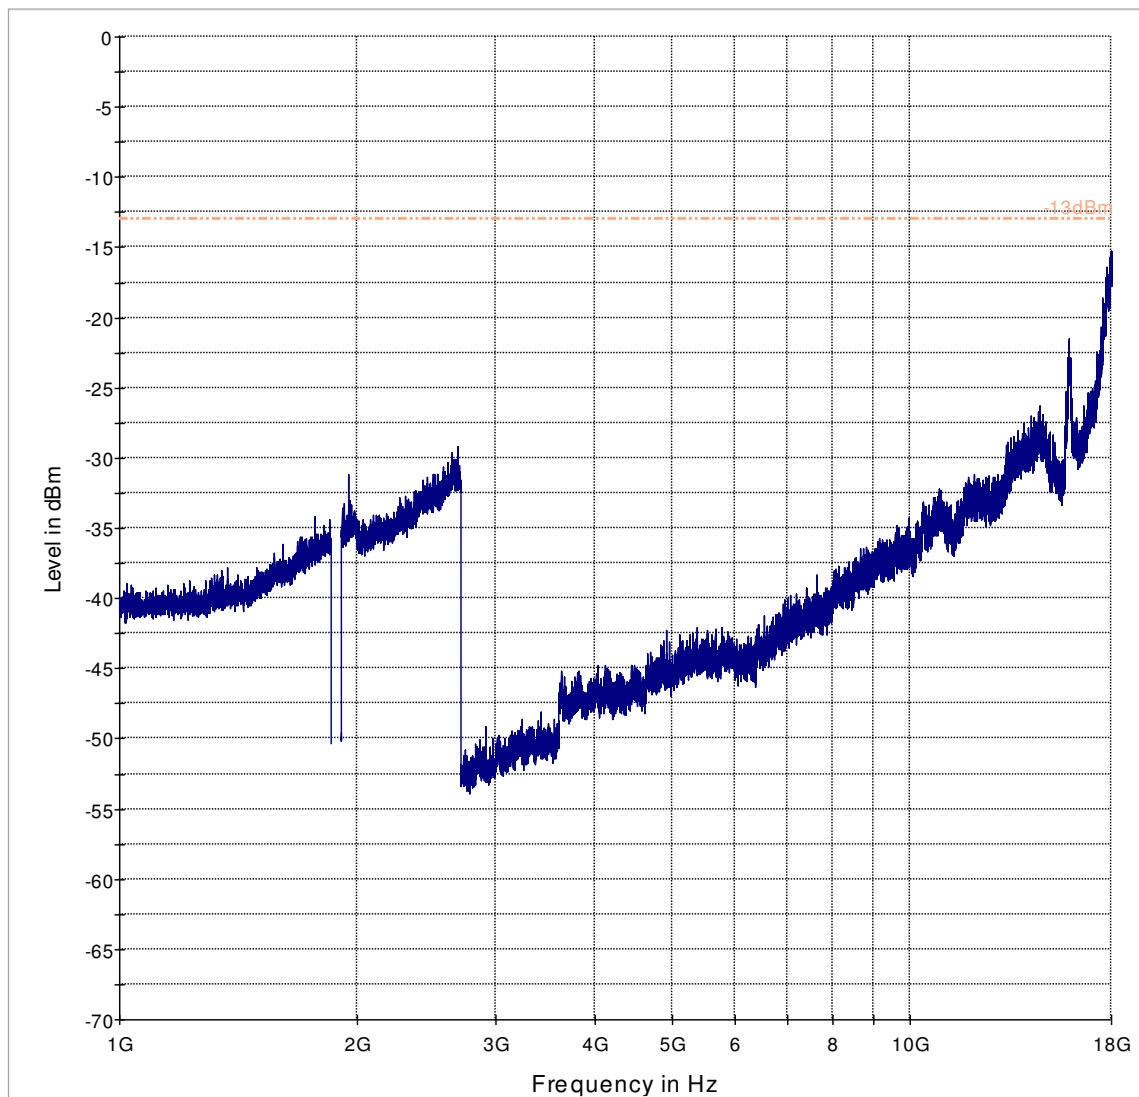


7.4.25 GSM 1900, Tx: Ch. Mid, 18 GHz – 22 GHz

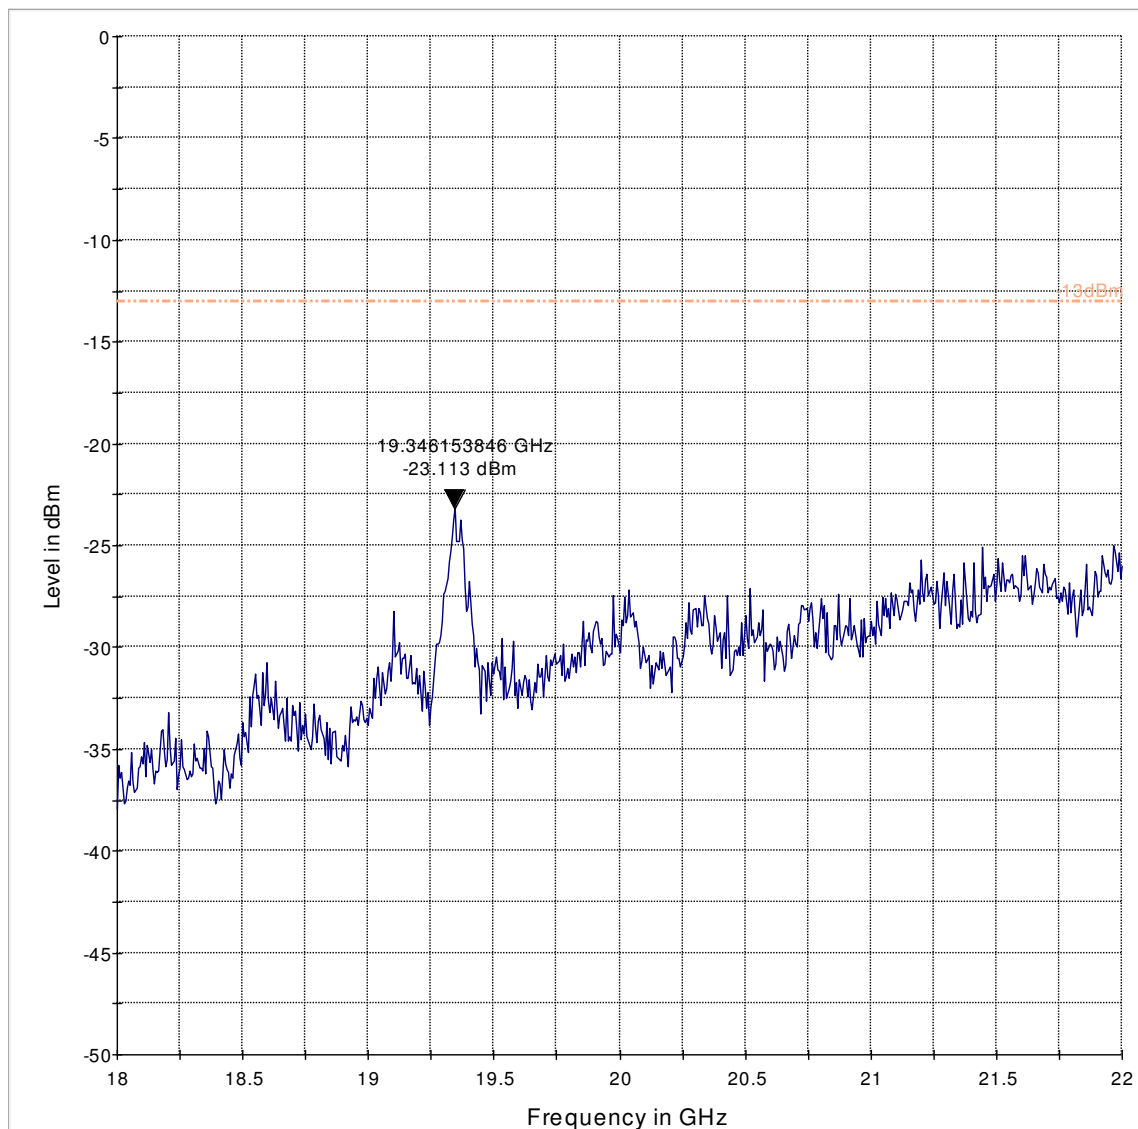


7.4.26 GSM 1900, Tx: Ch. High, 30 MHz – 1 GHz

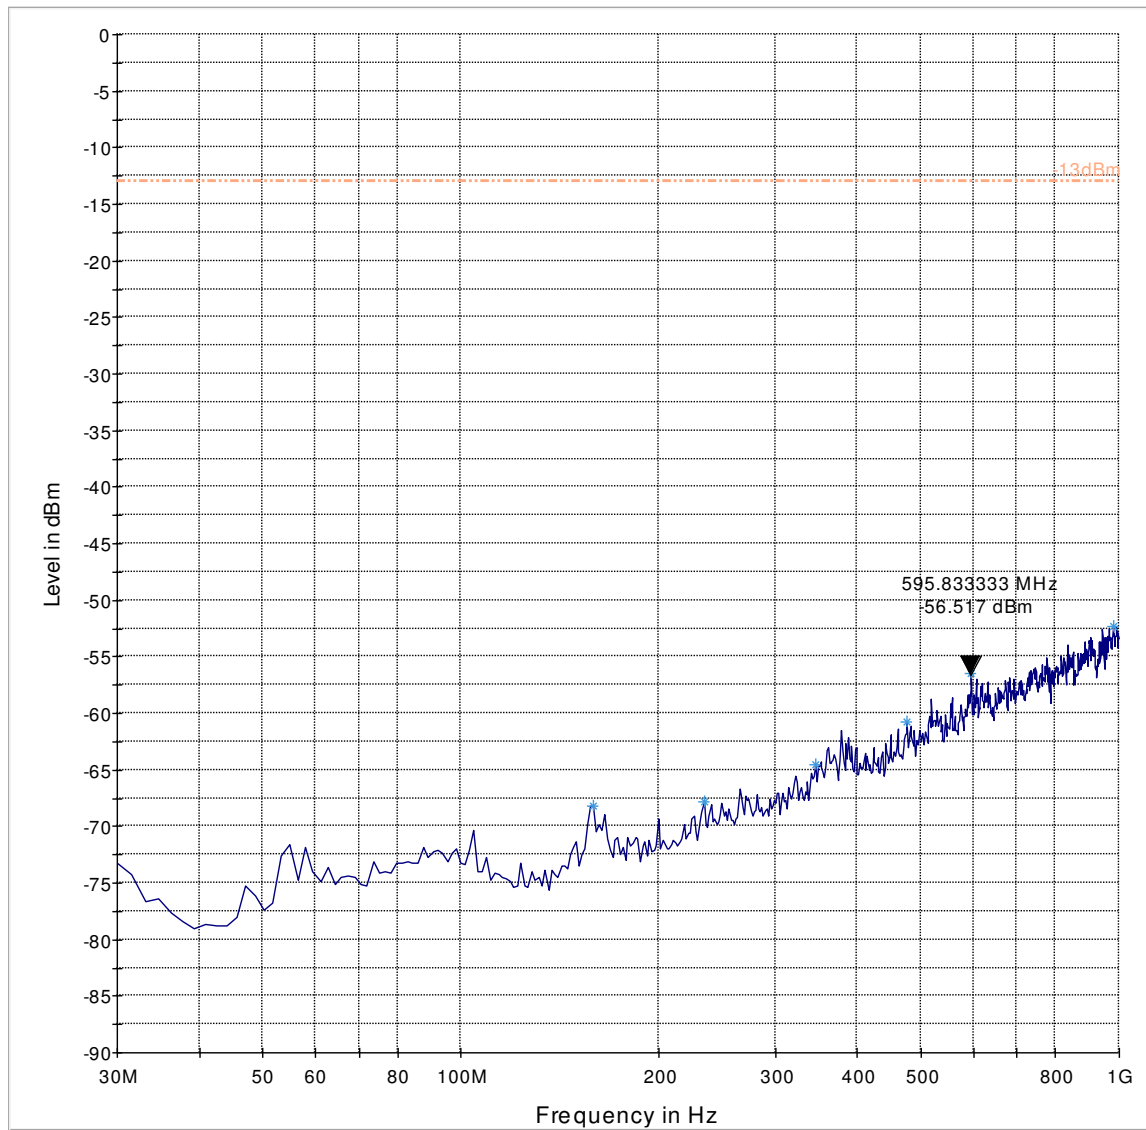


7.4.27 GSM 1900, Tx: Ch. High, 1 GHz – 18 GHz

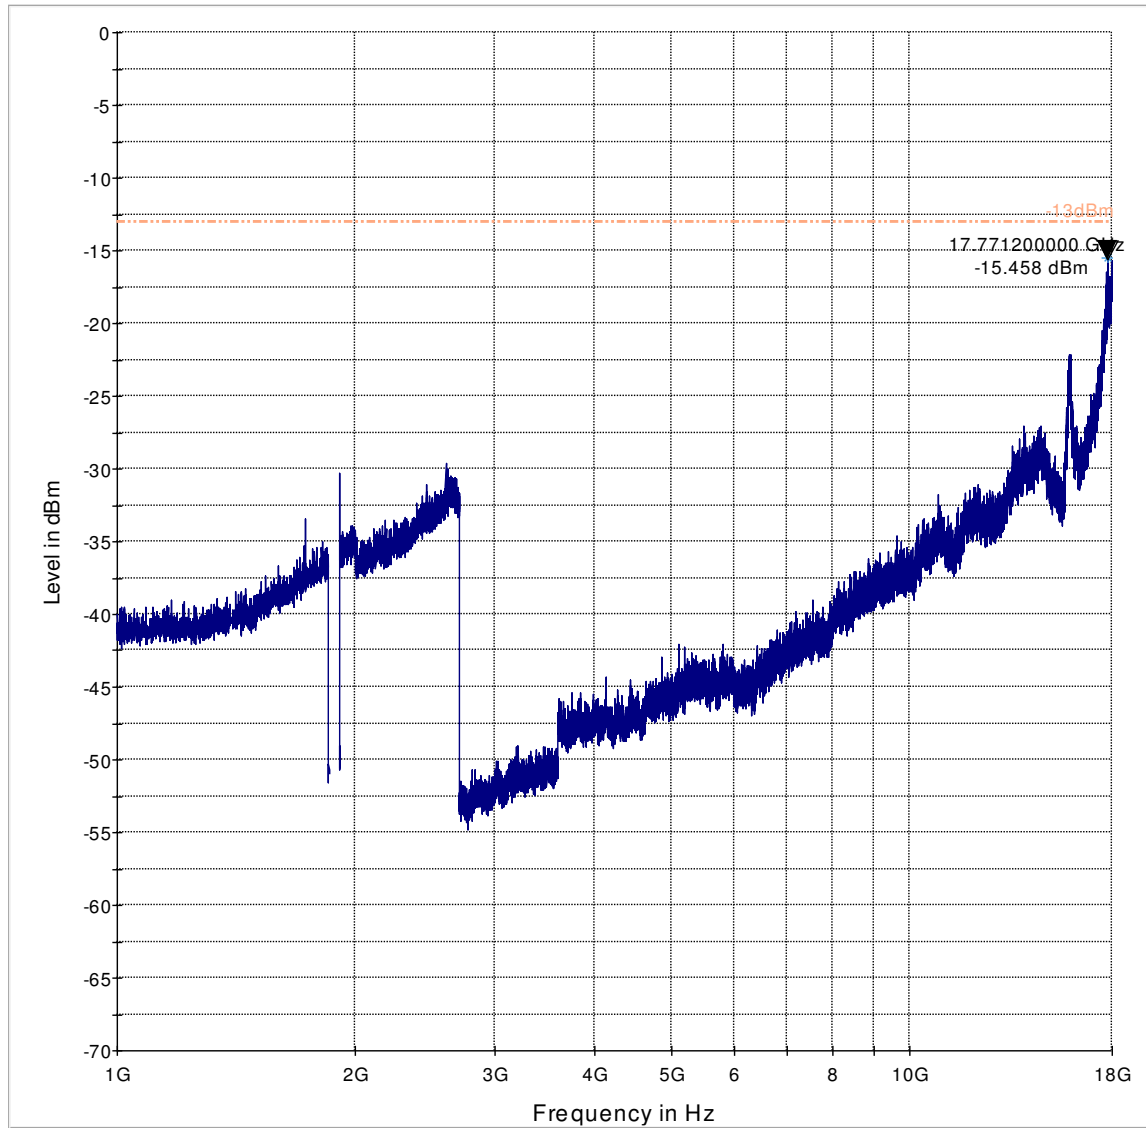


7.4.28 GSM 1900, Tx: Ch. High, 18 GHz – 22 GHz

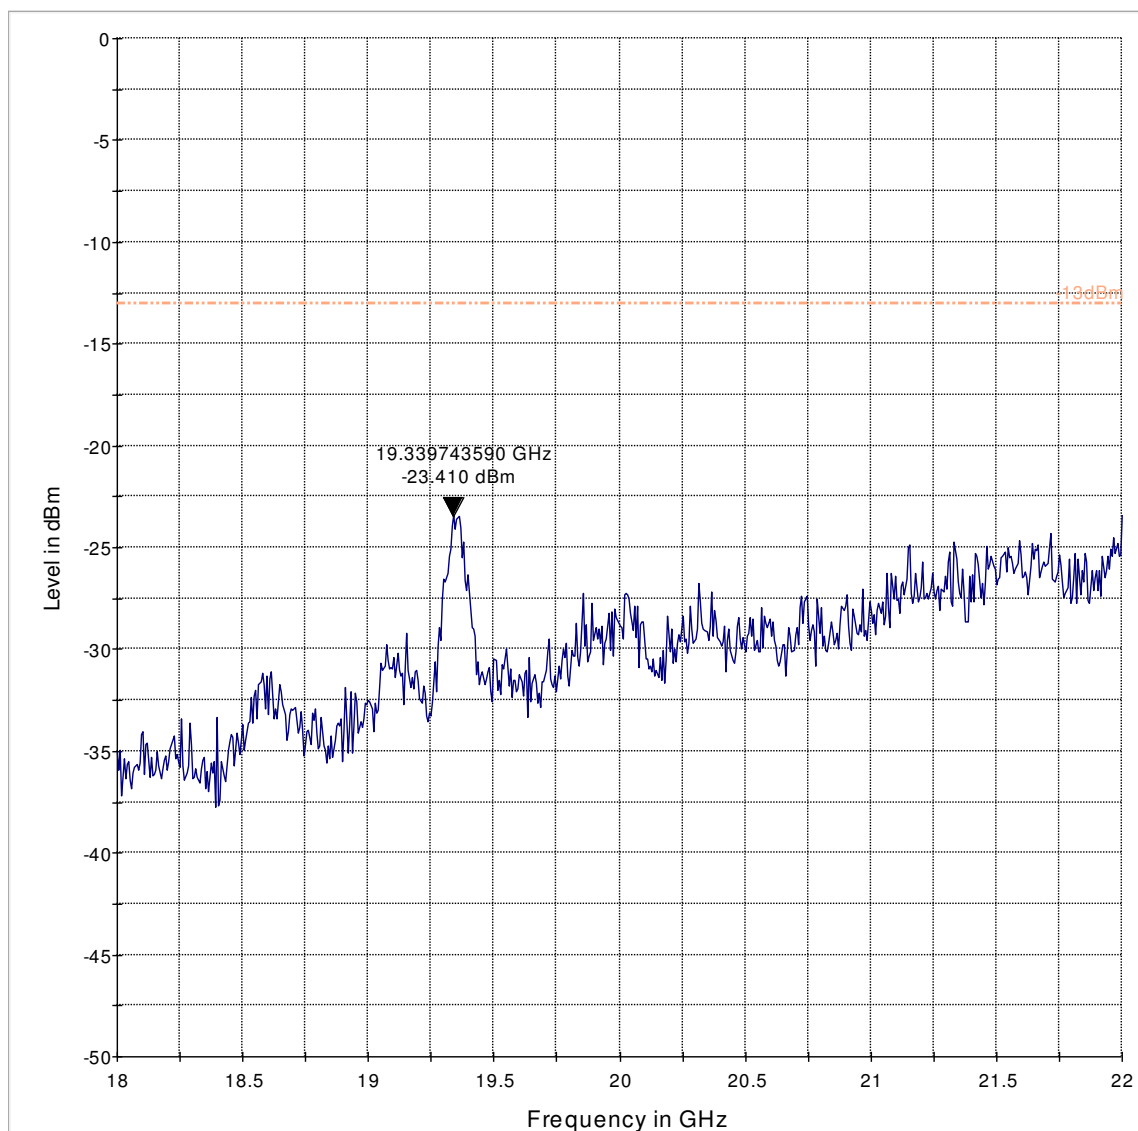


7.4.29 UMTS FDD Band II, Tx: Ch. Low, 30 MHz – 1 GHz

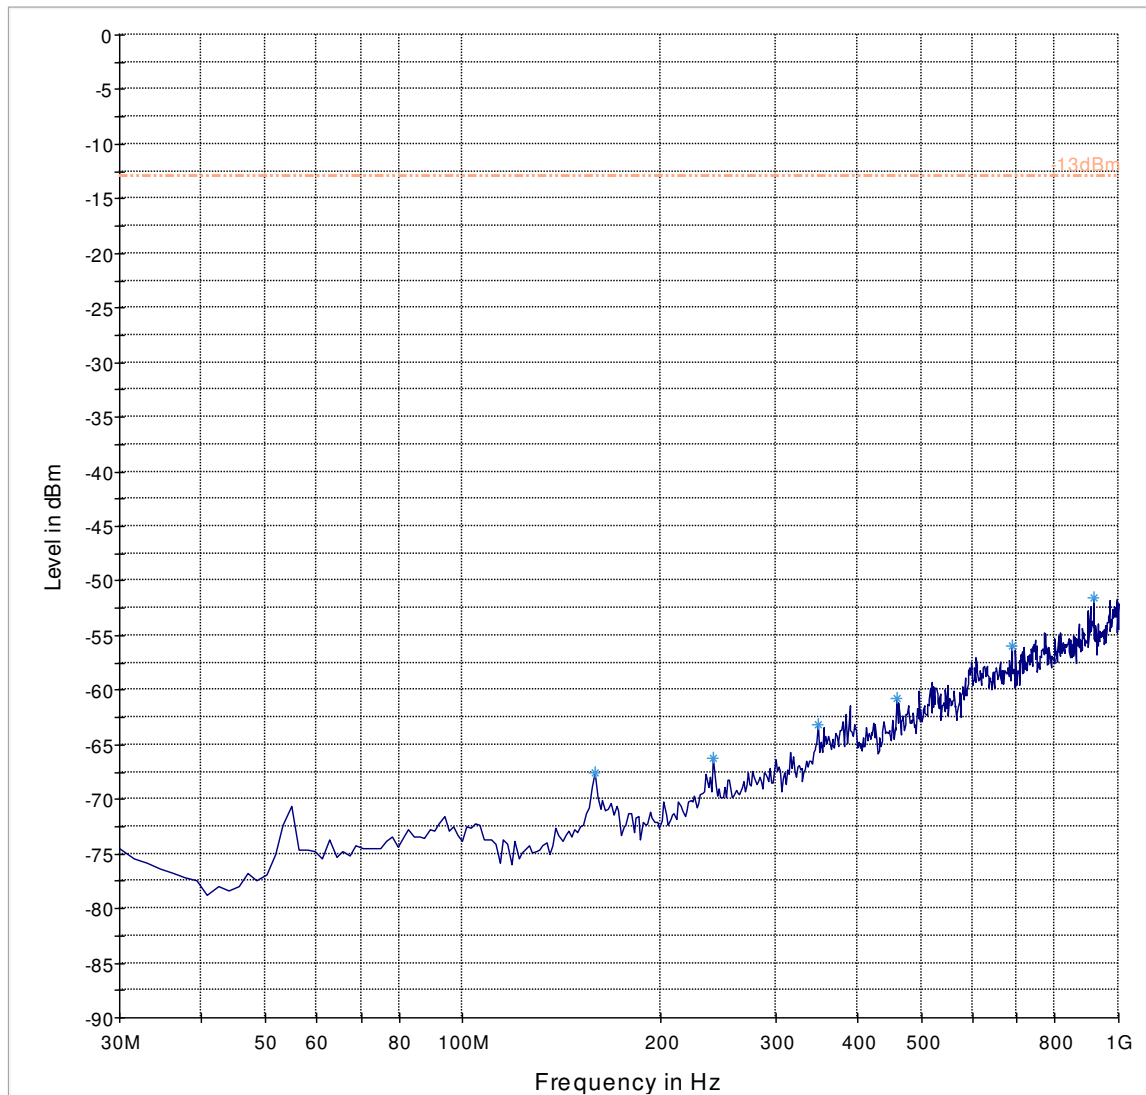


7.4.30 UMTS FDD Band II, Tx: Ch. Low, 1 GHz – 18 GHz

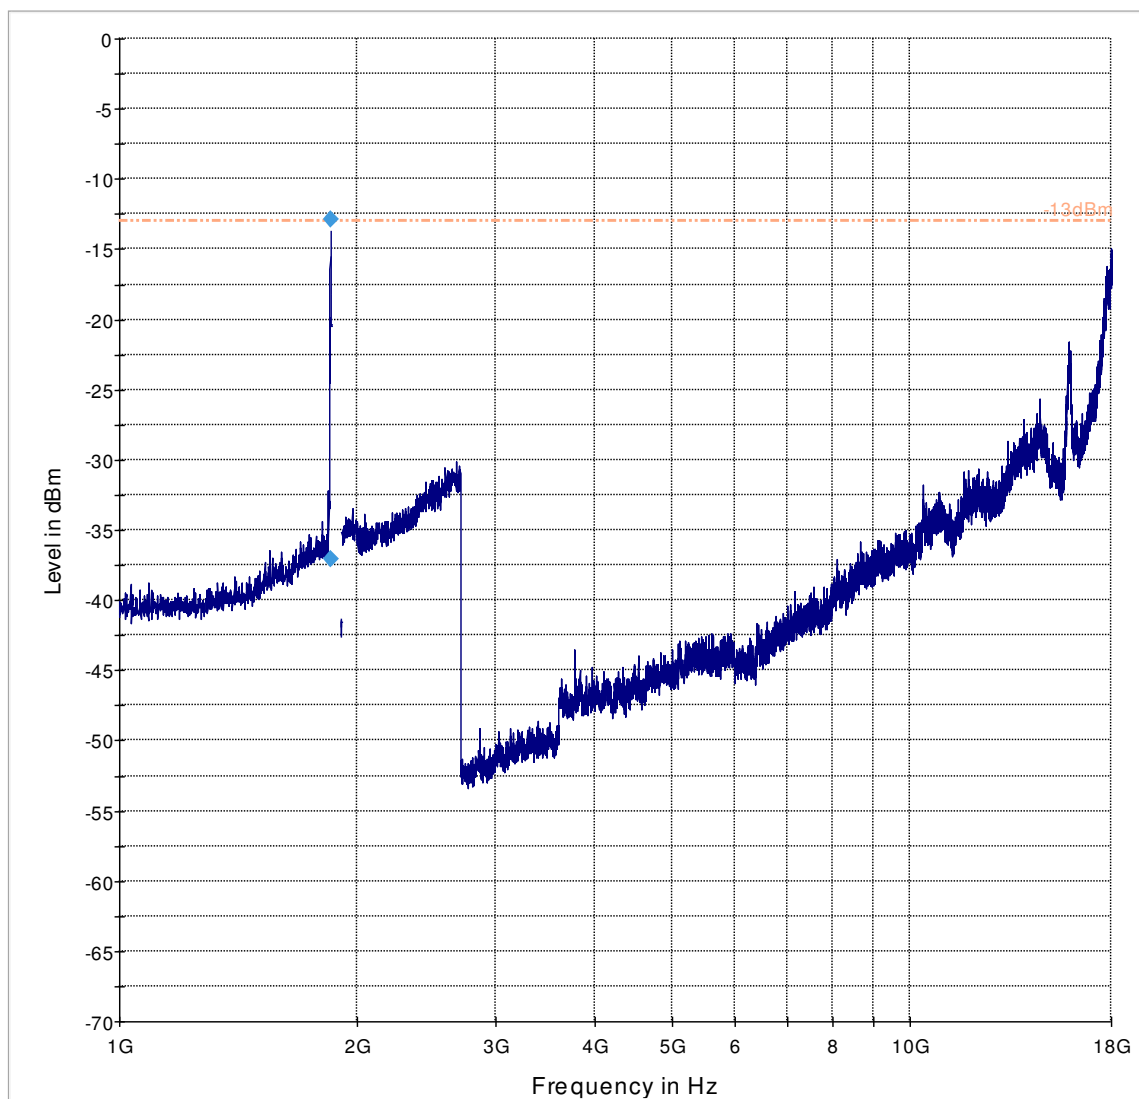


7.4.31 UMTS FDD Band II, Tx: Ch. Low, 18 GHz – 22 GHz

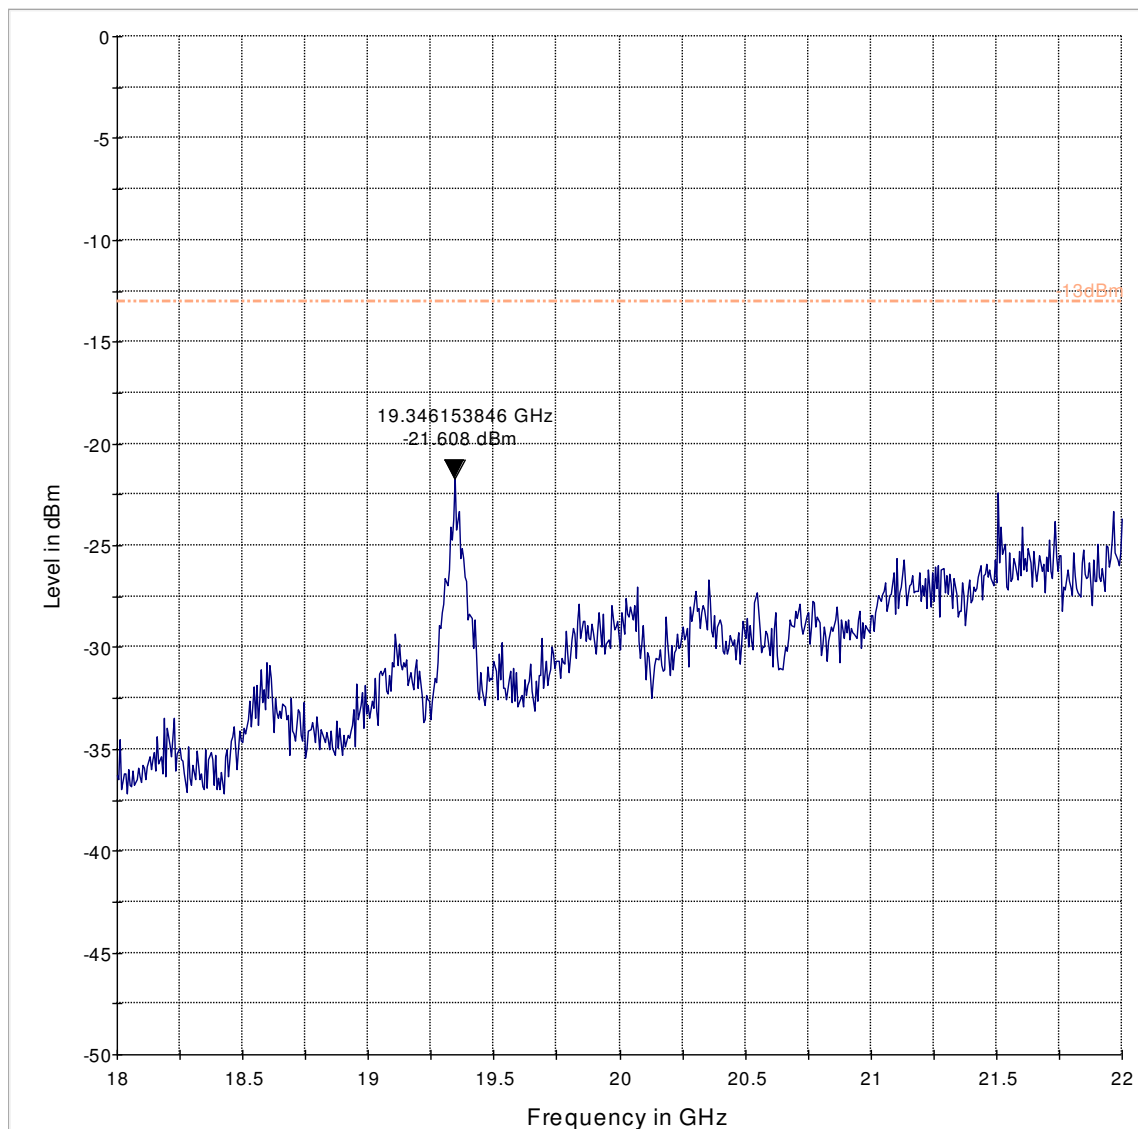


7.4.32 UMTS FDD Band II, Tx: Ch. Mid, 9 KHz – 30 MHz

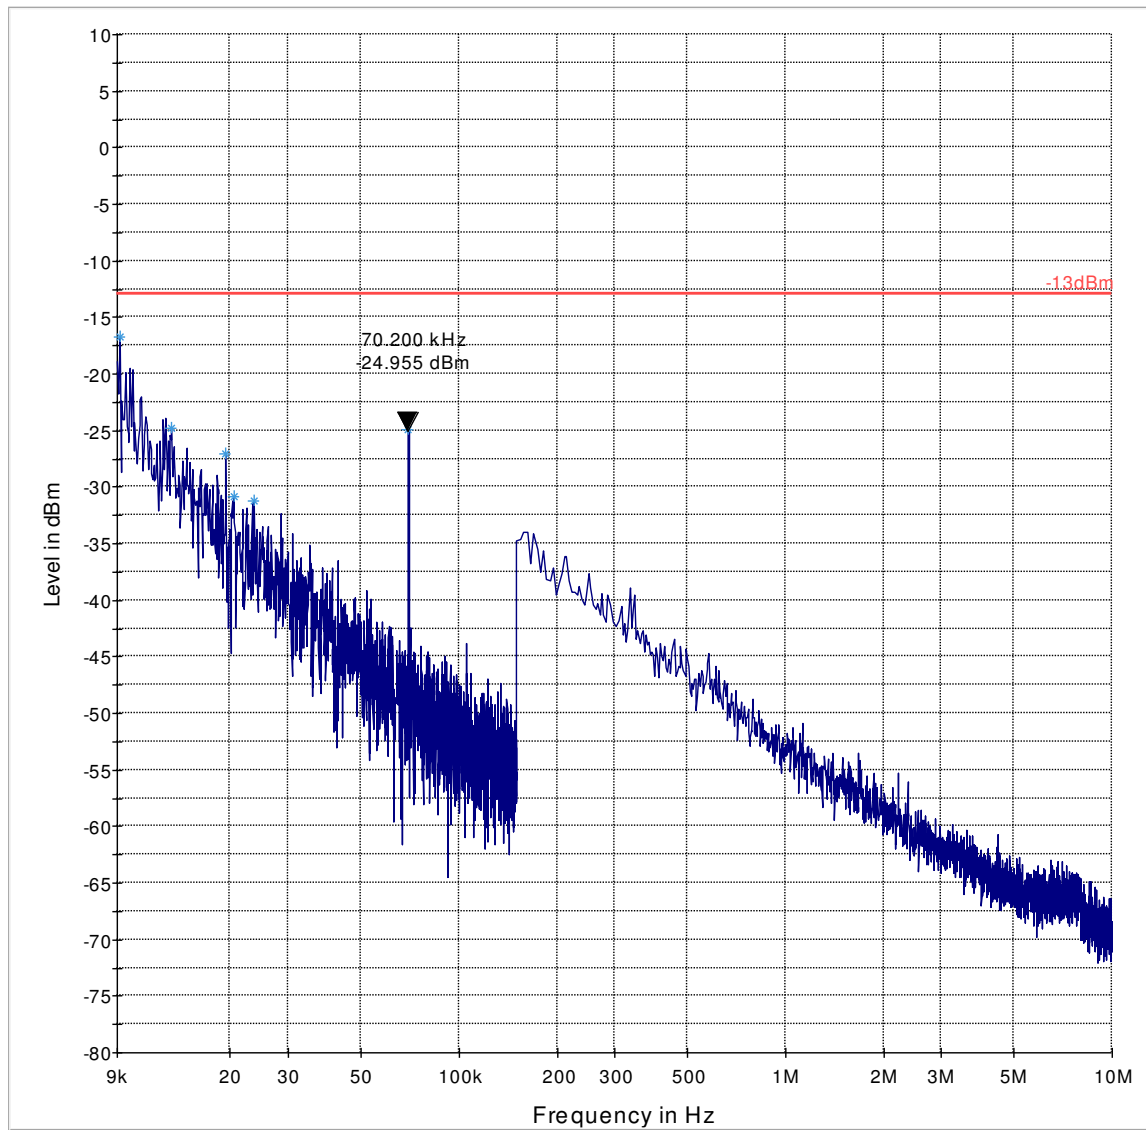


7.4.33 UMTS FDD Band II, Tx: Ch. Mid, 30 MHz – 1 GHz

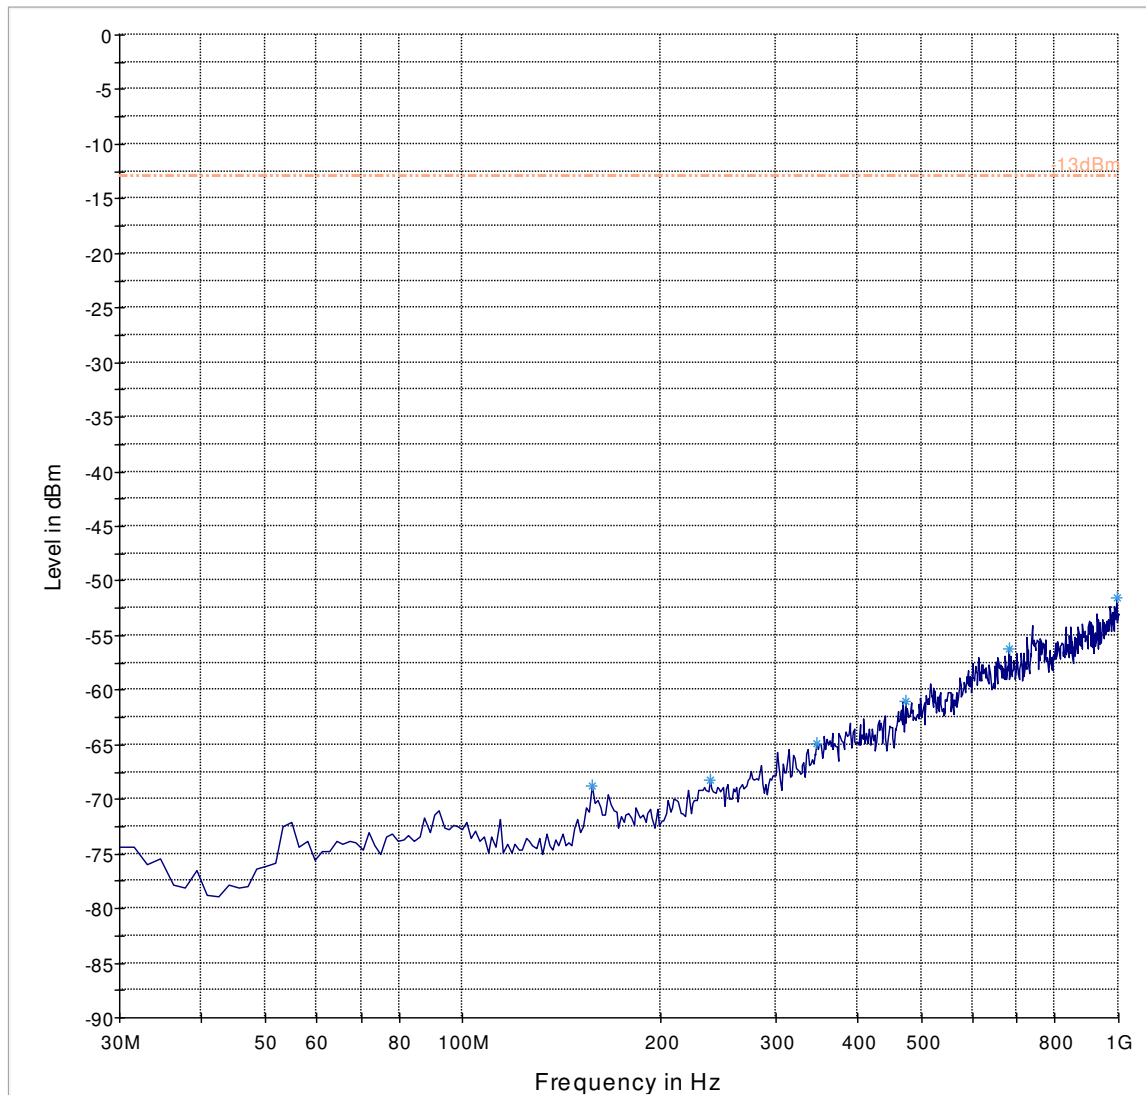


7.4.34 UMTS FDD Band II, Tx: Ch. Mid, 1 GHz – 18 GHz

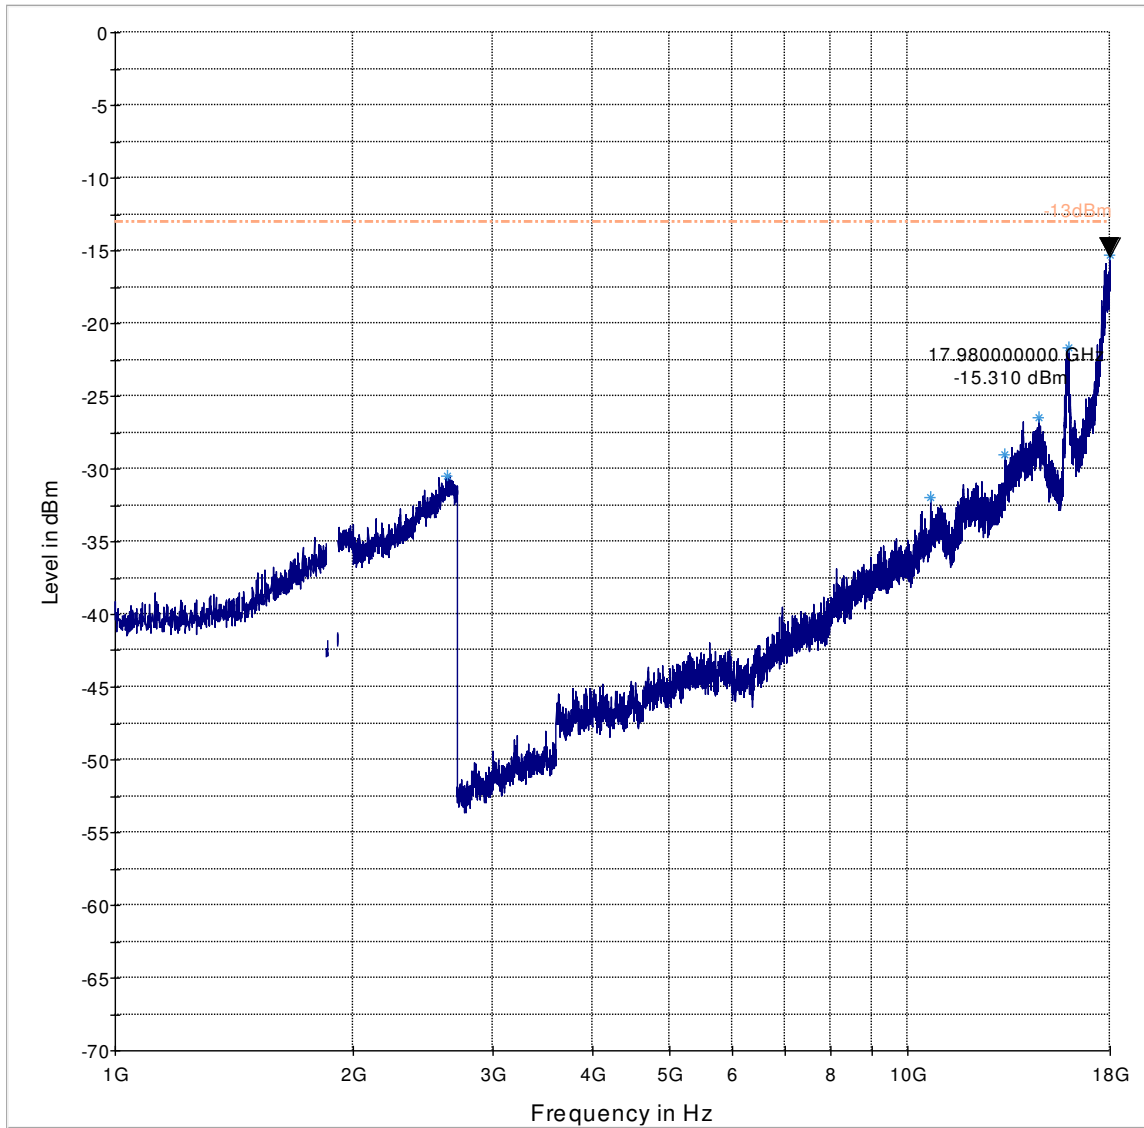


7.4.35 UMTS FDD Band II, Tx: Ch. Mid, 18 GHz – 22 GHz

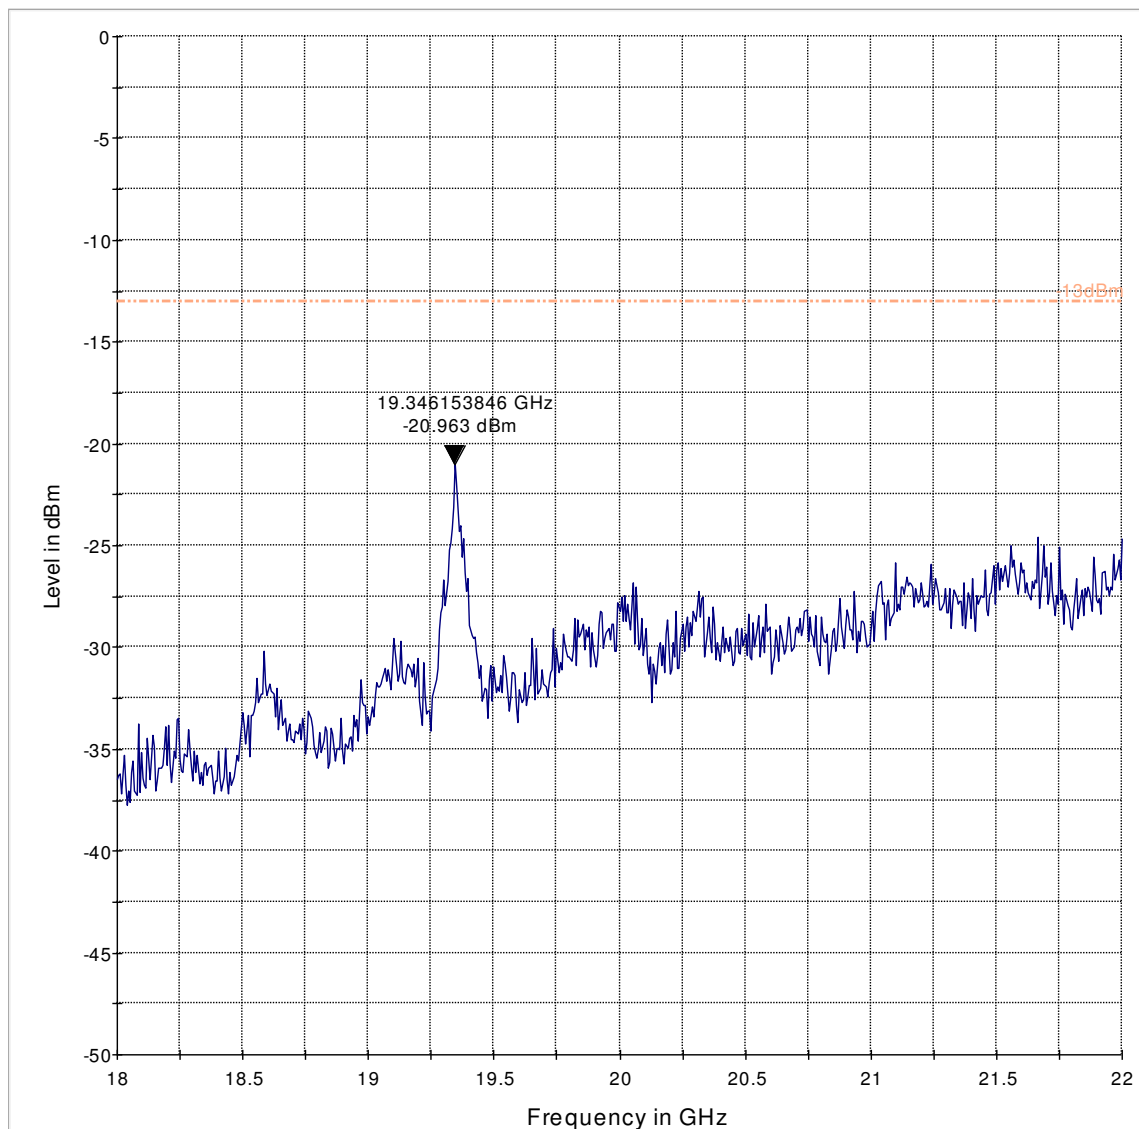


7.4.36 UMTS FDD Band II, Tx: Ch. High, 30 MHz – 1 GHz

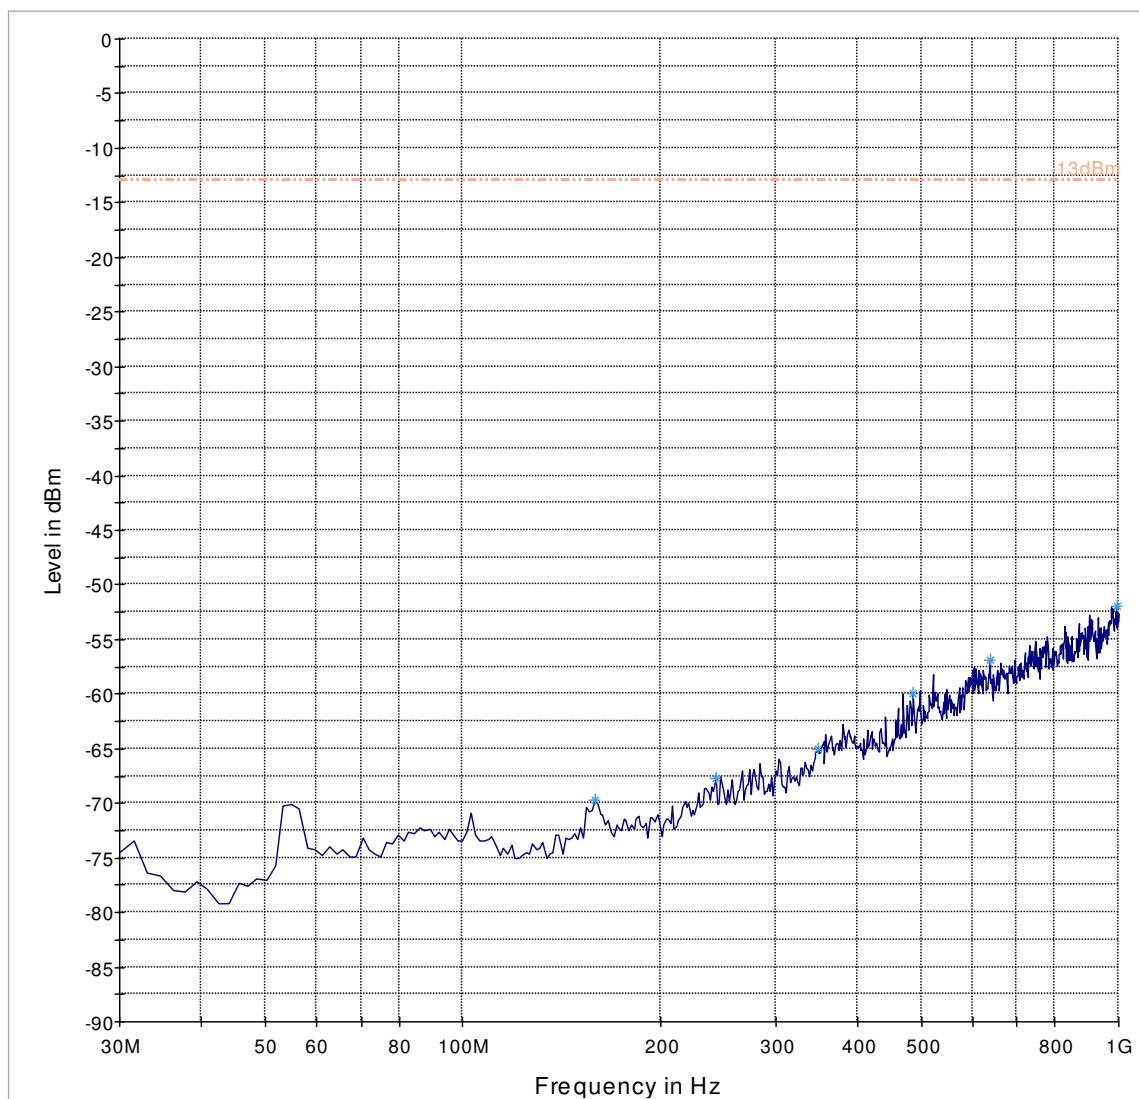

7.4.37 UMTS FDD Band II, Tx: Ch. High, 1 GHz – 18 GHz

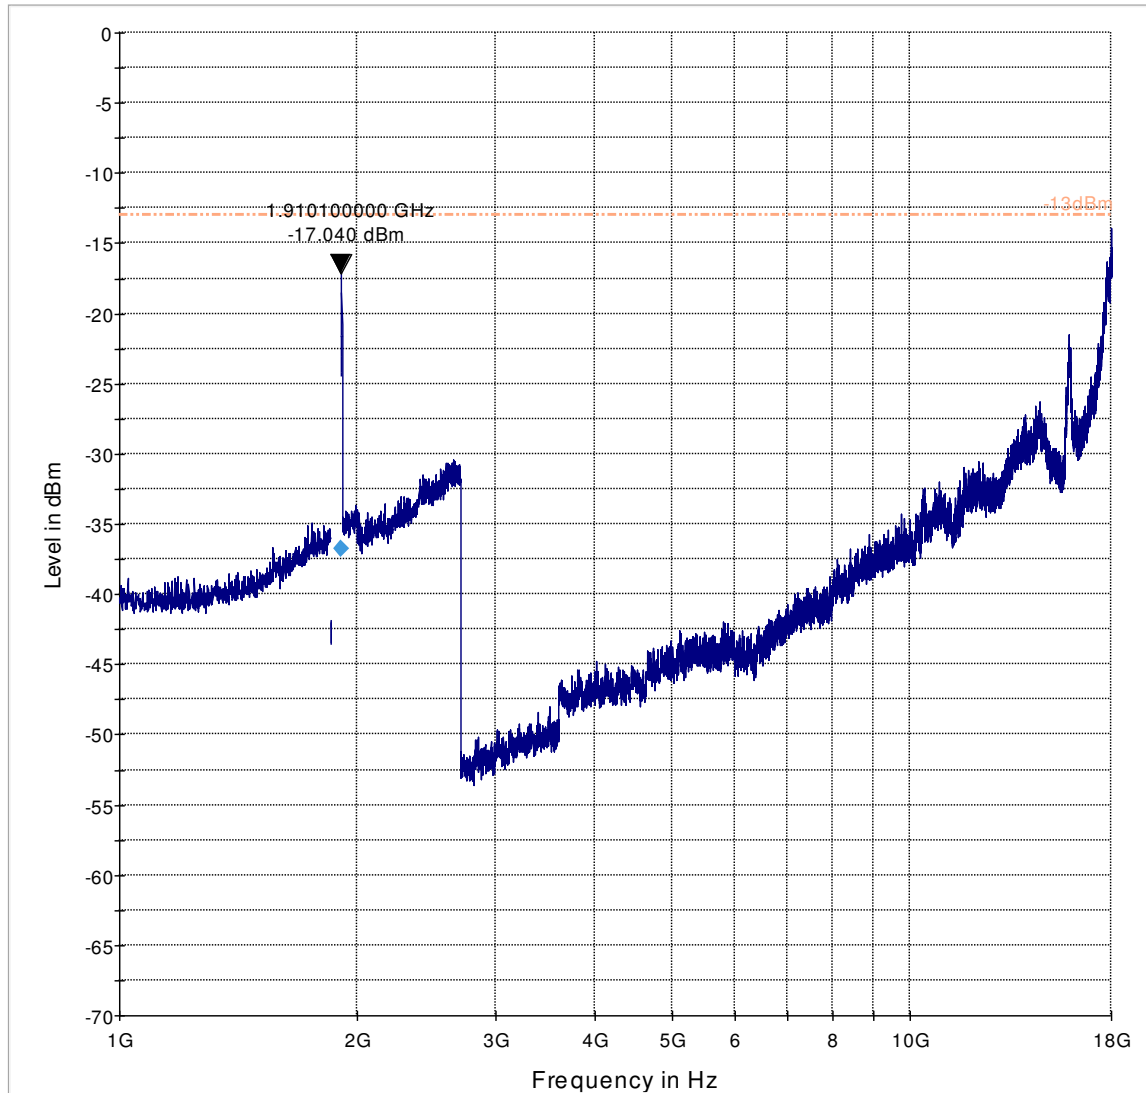

7.4.38 UMTS FDD Band II, Tx: Ch. High, 18 GHz – 22 GHz

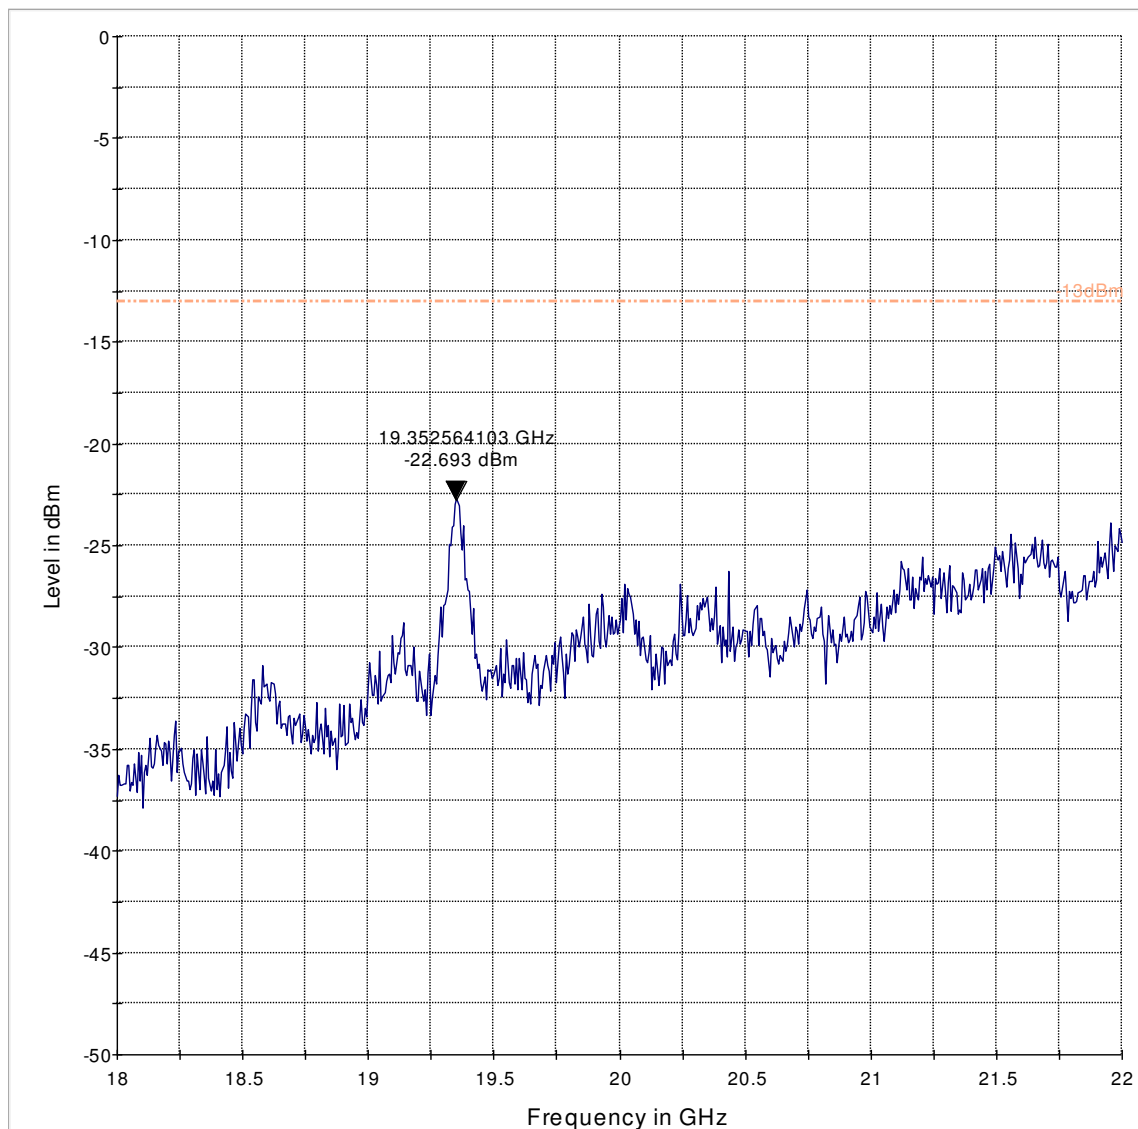

8 Test Equipment and Ancillaries used for tests.


| Item Name | Equipment Type | Manufacturer | Model | Serial # | Calibration Cycle | Last Calibration Date |
|----------------------------|---------------------------|-----------------|-----------|----------|-------------------|-----------------------|
| Antenna Biconilog 3142E | Biconlog Antenna | EMCO | 3142E | 166067 | 3 years | 6/14/2014 |
| Antenna Horn 3115 SN 35111 | Horn Antenna | EMCO | 3115 | 35111 | 3 years | 7/24/2015 |
| Antenna Horn 3116 | Horn Antenna | ETS Lindgren | 3116 | 70497 | 3 years | 7/22/2015 |
| Antenna Loop 6512 | Loop Antenna | ETS Lindgren | 6512 | 49838 | 3 years | 3/13/2014 |
| Digital Barometer | Compact Digital Barometer | Control Company | 35519-055 | 91119547 | 2 Years | 4/7/2015 |
| Receiver ESU40 | EMI Receiver | R&S | ESU40 | 100251 | 3 years | 6/29/2015 |
| Spectrum Analyzer FSU26 #2 | Spectrum Analyzer | R&S | FSU26 | 200065 | 3 years | 7/4/2015 |


Equipment used meets the measurement uncertainty requirements as required per applicable standards for 95% confidence levels.

Calibration due dates, unless defined specifically, falls on the last day of the month.


Items indicated "N/A" for cal status either do not specifically require calibration or is internally characterized before use.

9 Block Diagrams

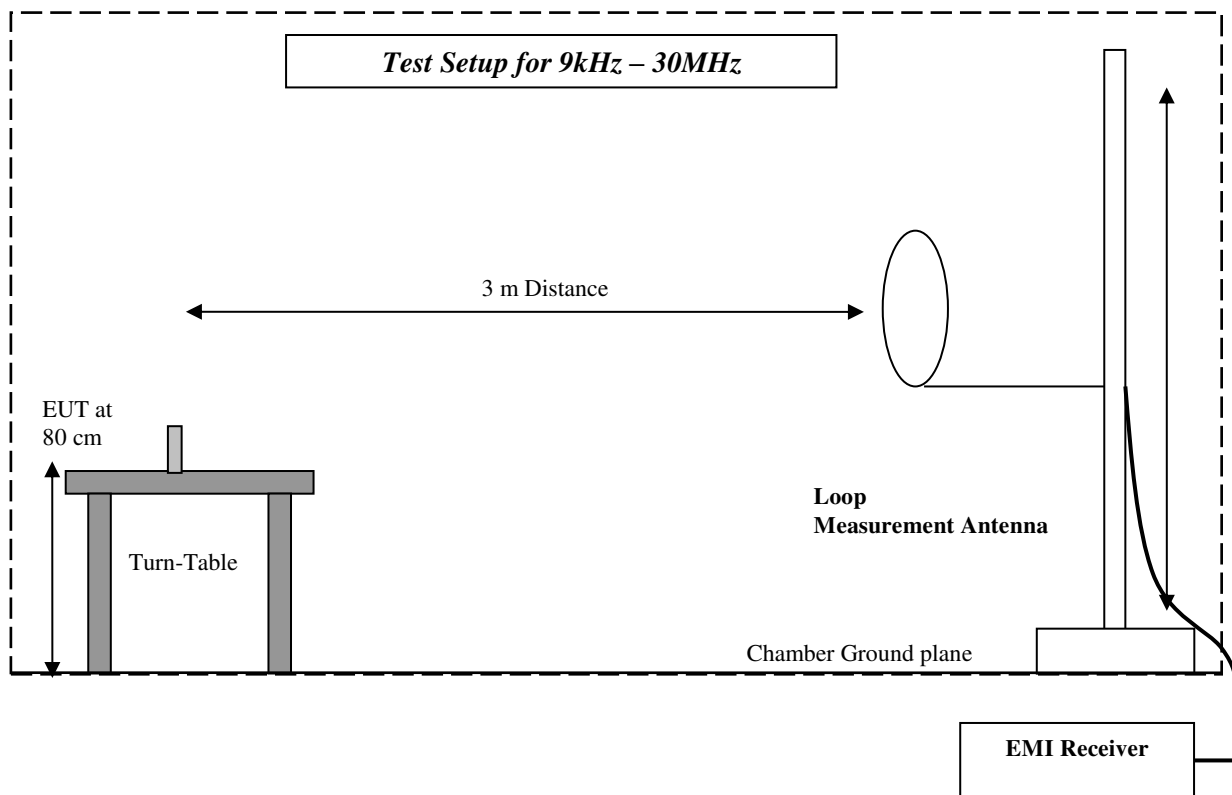

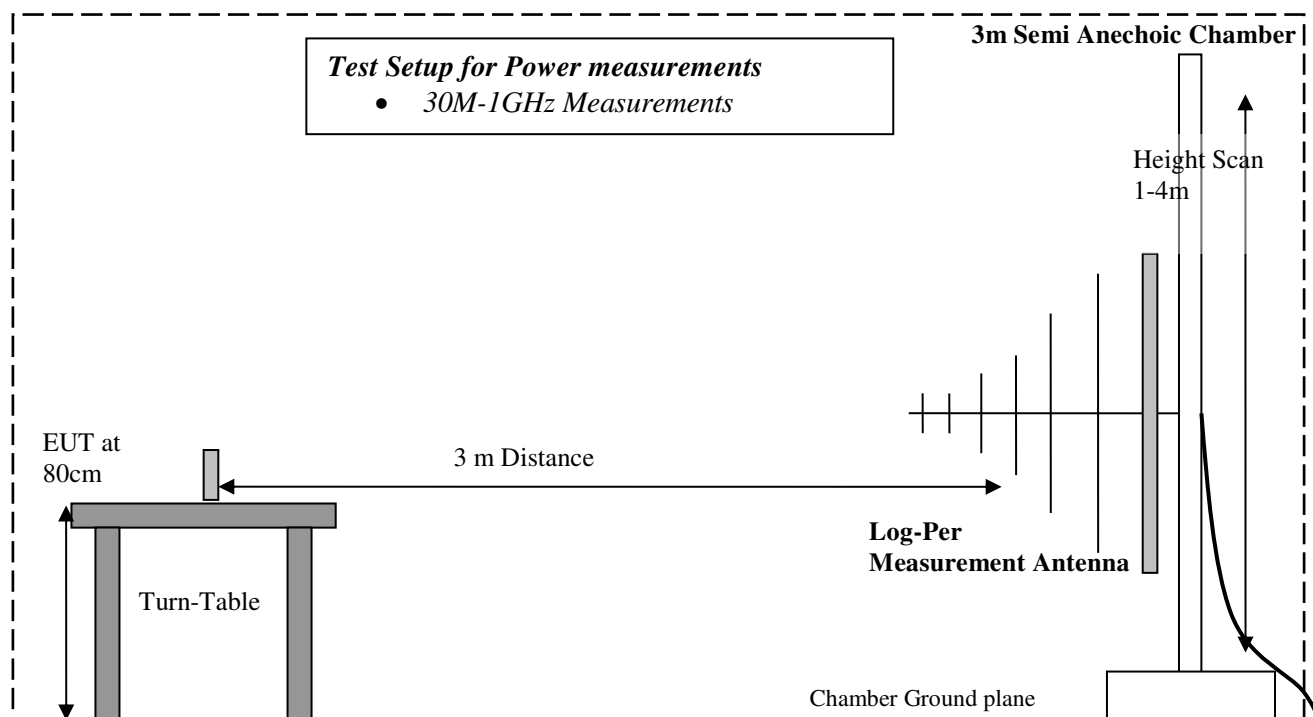

EMI Receiver

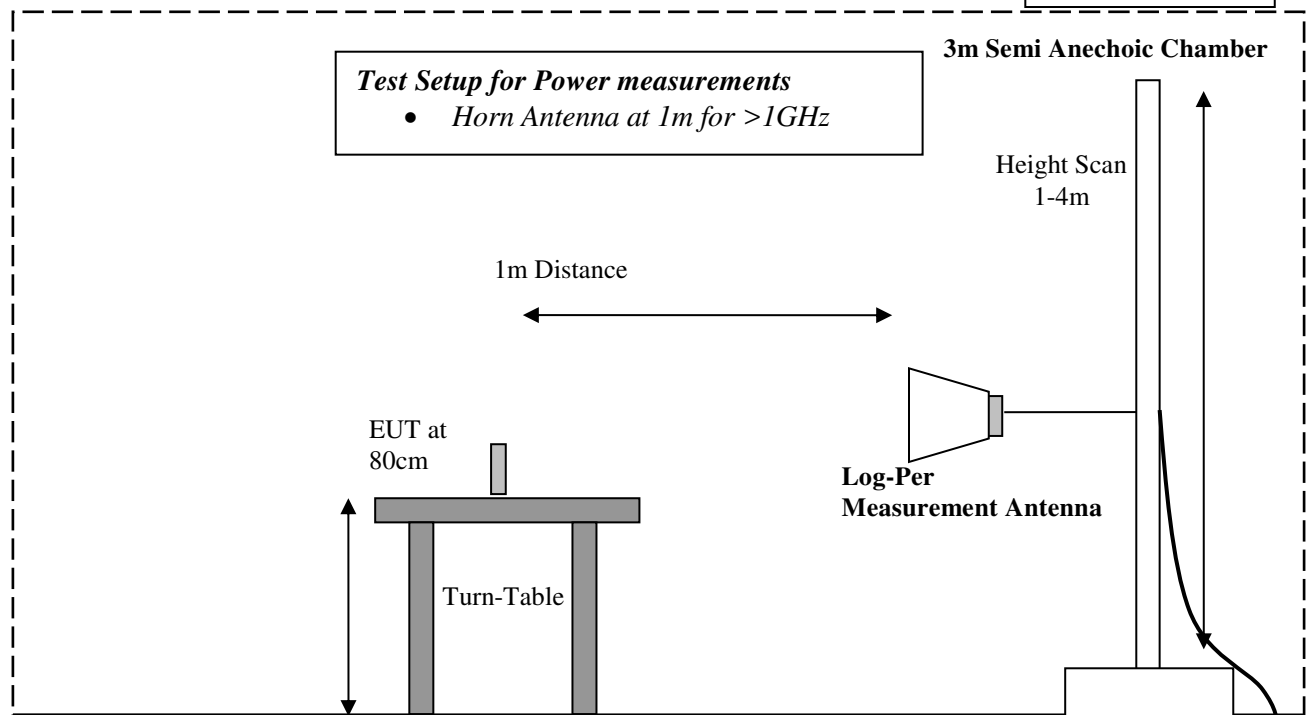

EMI Receiver

10 Revision History

| Date | Report Name | Changes to Report | Report prepared by |
|------------------|-------------------------------|-------------------|--------------------|
| February 3, 2016 | EMC_MOOGI-005-15001_FCC_22_24 | Initial Version | Yu-Chien Ho |