

TEST REPORT

Reference No. : WTS16S0652958E
FCC ID..... : 2AGUA-CAM360
Applicant..... : HK ELEPHONE COMMUNICATION TECH CO.,LIMITED
Address..... : UNIT 04,7/F BRIGHT WAY TOWER NO.33 MONG KOK RD KL,
Hong Kong
Manufacturer : HK ELEPHONE COMMUNICATION TECH CO., LIMITED
Address..... : UNIT 04,7/F BRIGHT WAY TOWER NO.33 MONG KOK RD KL,
Hong Kong
Product Name..... : DV Camera
Model No. : EleCam 360
Brand..... : EIE
Standards..... : FCC CFR47 Part 15 C Section 15.247:2015
Date of Receipt sample..... : Jun. 13, 2016
Date of Test..... : Jun. 15 – 20, 2016
Date of Issue..... : Jul. 11, 2016
Test Result..... : **Pass**

Remarks:

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company.
The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

Prepared By:

Waltek Services (Shenzhen) Co., Ltd.


Address: 1/F., Fukangtai Building, West Baima Road, Songgang Street, Baoan District, Shenzhen,
Guangdong, China
Tel :+86-755-83551033
Fax:+86-755-83552400

Tested by:



Zero Zhou / Test Engineer

Approved by:



Philo Zhong / Manager

2 Test Summary

Test Items	Test Requirement	Result
Radiated Emissions	15.247 15.205(a) 15.209(a)	PASS
Conducted Emissions	15.207(a)	PASS
6dB Bandwidth	15.247(a)(2)	PASS
Maximum Peak Output Power	15.247(b)(3),(4)	PASS
Power Spectral Density	15.247(e)	PASS
Band Edge	15.247(d)	PASS
Antenna Requirement	15.203	PASS
Maximum Permissible Exposure (Exposure of Humans to RF Fields)	1.1307(b)(1)	PASS

3 Contents

	Page
1 COVER PAGE.....	1
2 TEST SUMMARY	2
3 CONTENTS	3
4 REPORT REVISION HISTORY.....	5
5 GENERAL INFORMATION.....	6
5.1 GENERAL DESCRIPTION OF E.U.T.	6
5.2 DETAILS OF E.U.T.	6
5.3 CHANNEL LIST	6
5.4 TEST MODE	7
5.5 TEST FACILITY	7
6 EQUIPMENT USED DURING TEST	8
6.1 EQUIPMENTS LIST	8
6.2 DESCRIPTION OF SUPPORT UNITS	9
6.3 MEASUREMENT UNCERTAINTY	9
6.4 TEST EQUIPMENT CALIBRATION	9
7 CONDUCTED EMISSION	10
7.1 E.U.T. OPERATION	10
7.2 EUT SETUP.....	10
7.3 MEASUREMENT DESCRIPTION	10
7.4 CONDUCTED EMISSION TEST RESULT	11
8 RADIATED EMISSIONS.....	13
8.1 EUT OPERATION.....	13
8.2 TEST SETUP	14
8.3 SPECTRUM ANALYZER SETUP	15
8.4 TEST PROCEDURE	16
8.5 CORRECTED AMPLITUDE & MARGIN CALCULATION	16
8.6 SUMMARY OF TEST RESULTS	17
9 BAND EDGE MEASUREMENT	29
9.1 TEST PRODUCE.....	29
9.2 TEST RESULT	30
10 6 DB BANDWIDTH MEASUREMENT	34
10.1 TEST PROCEDURE:.....	34
10.2 TEST RESULT:	34
11 MAXIMUM PEAK OUTPUT POWER	41
11.1 TEST PROCEDURE:.....	41
11.2 TEST RESULT:	41
12 POWER SPECTRAL DENSITY	48
12.1 TEST PROCEDURE:.....	48
12.2 TEST RESULT:	48
13 ANTENNA REQUIREMENT	55
14 RF EXPOSURE.....	56
14.1 REQUIREMENTS.....	56
14.2 THE PROCEDURES / LIMIT	56
14.3 MPE CALCULATION METHOD	57
15 PHOTOGRAPHS – MODEL ELECAM 360TEST SETUP	58

15.1	PHOTOGRAPH - SPURIOUS EMISSIONS RADIATED TEST SETUP	58
16	PHOTOGRAPHS - CONSTRUCTIONAL DETAILS	59
16.1	MODEL ELECAM 360-EXTERNAL PHOTOS	59
16.2	MODEL ELECAM 360- INTERNAL PHOTOS.....	63

4 Report Revision History

Report No.	Report Version	Description	Issue Date
WTS16S0652958E	NONE	Original	Jul. 11, 2016

5 General Information

5.1 General Description of E.U.T.

Product Name:	DV Camera
Model No.:	EleCam 360
Model Difference:	N/A
Operation Frequency:	802.11b/g/n HT20: 2412MHz ~ 2462MHz, 802.11n HT40: 2422MHz~2452MHz
The Lowest Oscillator:	32.768 kHz
Antenna Gain:	0dBi
Type of modulation:	IEEE 802.11b (CCK/QPSK/BPSK,11Mbps max.) IEEE 802.11g (BPSK/QPSK/16QAM/64QAM,54Mbps max.) IEEE 802.11n (BPSK/QPSK/16QAM/64QAM,HT20:72Mbps max., HT40:150Mbps max.)

5.2 Details of E.U.T.

Technical Data:	Battery DC 3.7V, 1400mAh
-----------------	--------------------------

5.3 Channel List

Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)
1	2412	2	2417	3	2422	4	2427
5	2432	6	2437	7	2442	8	2447
9	2452	10	2457	11	2462	12	-

5.4 Test Mode

Table 1 Tests Carried Out Under FCC part 15.247

Test Items	Mode	Data Rate	Channel	TX/RX
Maximum Peak Output Power	802.11b	11 Mbps	1/6/11	TX
	802.11g	54 Mbps	1/6/11	TX
	802.11n HT20	108 Mbps	1/6/11	TX
	802.11n HT40	150 Mbps	3/6/9	TX
Power Spectral Density	802.11b	11 Mbps	1/6/11	TX
	802.11g	54 Mbps	1/6/11	TX
	802.11n HT20	108 Mbps	1/6/11	TX
	802.11n HT40	150 Mbps	3/6/9	TX
Frequency Range	802.11b	11 Mbps	1/11	TX
	802.11g	54 Mbps	1/11	TX
	802.11n HT20	108 Mbps	1/11	TX
	802.11n HT40	150 Mbps	3/9	TX
Transmitter Spurious Emissions	802.11b	11 Mbps	1/6/11	TX
	802.11g	54 Mbps	1/6/11	TX
	802.11n HT20	108 Mbps	1/6/11	TX
	802.11n HT40	150 Mbps	3/6/9	TX

Note :Parameters set by test software during channel & power tests, the software provided by the customer was used to set the operating channels as well as the output power level. The RF output power set is the power expected by the manufacturer and is going to be fixed on the firmware of the final product .

5.5 Test Facility

The test facility has a test site registered with the following organizations:

- IC – Registration No.: 7760A-1**
 Waltek Services(Shenzhen) Co., Ltd. Has been registered and fully described in a report filed with the Industry Canada. The acceptance letter from the Industry Canada is maintained in our files.
 Registration number 7760A-1, October 15, 2015.
- FCC Test Site 1#– Registration No.: 880581**
 Waltek Services(Shenzhen) Co., Ltd. EMC Laboratory `has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 880581, April 29, 2014.
- FCC Test Site 2#– Registration No.: 328995**
 Waltek Services(Shenzhen) Co., Ltd. EMC Laboratory `has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 328995, December 3, 2014.

6 Equipment Used during Test

6.1 Equipments List

Conducted Emissions Test Site 1#						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1.	EMI Test Receiver	R&S	ESCI	100947	Sep.15,2015	Sep.14,2016
2.	LISN	R&S	ENV216	101215	Sep.15,2015	Sep.14,2016
3.	Cable	Top	TYPE16(3.5M)	-	Sep.15,2015	Sep.14,2016
Conducted Emissions Test Site 2#						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1.	EMI Test Receiver	R&S	ESCI	101155	Sep.15,2015	Sep.14,2016
2.	LISN	SCHWARZBECK	NSLK 8128	8128-289	Sep.15,2015	Sep.14,2016
3.	Limitter	York	MTS-IMP-136	261115-001-0024	Sep.15,2015	Sep.14,2016
4.	Cable	LARGE	RF300	-	Sep.15,2015	Sep.14,2016
3m Semi-anechoic Chamber for Radiation Emissions Test site 1#						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1	EMC Analyzer	Agilent	E7405A	MY45114943	Sep.15,2015	Sep.14,2016
2	Active Loop Antenna	Beijing Dazhi	ZN30900A	-	Sep.15,2015	Sep.14,2016
3	Trilog Broadband Antenna	SCHWARZBECK	VULB9163	336	Apr.19,2016	Apr.18,2017
4	Coaxial Cable (below 1GHz)	Top	TYPE16(13M)	-	Sep.15,2015	Sep.14,2016
5	Broad-band Horn Antenna	SCHWARZBECK	BBHA 9120 D	667	Apr.19,2016	Apr.18,2017
6	Broad-band Horn Antenna	SCHWARZBECK	BBHA 9170	335	Apr.19,2016	Apr.18,2017
7	Broadband Preamplifier	COMPLIANCE DIRECTION	PAP-1G18	2004	Mar.17,2016	Mar.16,2017
8	Coaxial Cable (above 1GHz)	Top	1GHz-25GHz	EW02014-7	Apr.10,2016	Apr.09,2017
3m Semi-anechoic Chamber for Radiation Emissions Test site 2#						
Item	Equipment	Manufacturer	Model No.	Serial No	Last Calibration Date	Calibration Due Date
1	Test Receiver	R&S	ESCI	101296	Sep.15,2015	Sep.14,2016
2	Trilog Broadband Antenna	SCHWARZBECK	VULB9160	9160-3325	Sep.15,2015	Sep.14,2016
3	Amplifier	Compliance pirection systems inc	PAP-0203	22024	Sep.15,2015	Sep.14,2016
4	Cable	HUBER+SUHNER	CBL2	525178	Sep.15,2015	Sep.14,2016

RF Conducted Testing						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1.	EMC Analyzer (9k~26.5GHz)	Agilent	E7405A	MY45114943	Sep.15,2015	Sep.14,2016
2.	Spectrum Analyzer (9k~6GHz)	R&S	FSL6	100959	Sep.15,2015	Sep.14,2016
3.	Signal Analyzer (9k~26.5GHz)	Agilent	N9010A	MY50520207	Sep.15,2015	Sep.14,2016

6.2 Description of Support Units

Equipment	Description	Model No.	Series No.
/	/	/	/

6.3 Measurement Uncertainty

Parameter	Uncertainty
Radio Frequency	$\pm 1 \times 10^{-6}$
RF Power	± 1.0 dB
RF Power Density	± 2.2 dB
Radiated Spurious Emissions test	± 5.03 dB (30M~1000MHz)
	± 5.47 dB (1000M~25000MHz)
Conducted Spurious Emissions test	± 3.64 dB (AC mains 150KHz~30MHz)

6.4 Test Equipment Calibration

All the test equipments used are valid and calibrated by CEPREI Certification Body that address is No.110 Dongguan Zhuang RD. Guangzhou, P.R.China.

7 Conducted Emission

Test Requirement:	FCC CFR 47 Part 15 Section 15.207
Test Method:	ANSI C63.10:2013
Test Result:	PASS
Frequency Range:	150kHz to 30MHz
Class/Severity:	Class B
Limit:	66-56 dB μ V between 0.15MHz & 0.5MHz 56 dB μ V between 0.5MHz & 5MHz 60 dB μ V between 5MHz & 30MHz
Detector:	Peak for pre-scan (9kHz Resolution Bandwidth)

7.1 E.U.T. Operation

Operating Environment :


Temperature:	21.5 °C
Humidity:	51.9 % RH
Atmospheric Pressure:	101.2kPa

EUT Operation :

The test was performed in Transmitting mode, the test data were shown in the report.

7.2 EUT Setup

The conducted emission tests were performed using the setup accordance with the ANSI C63.10.

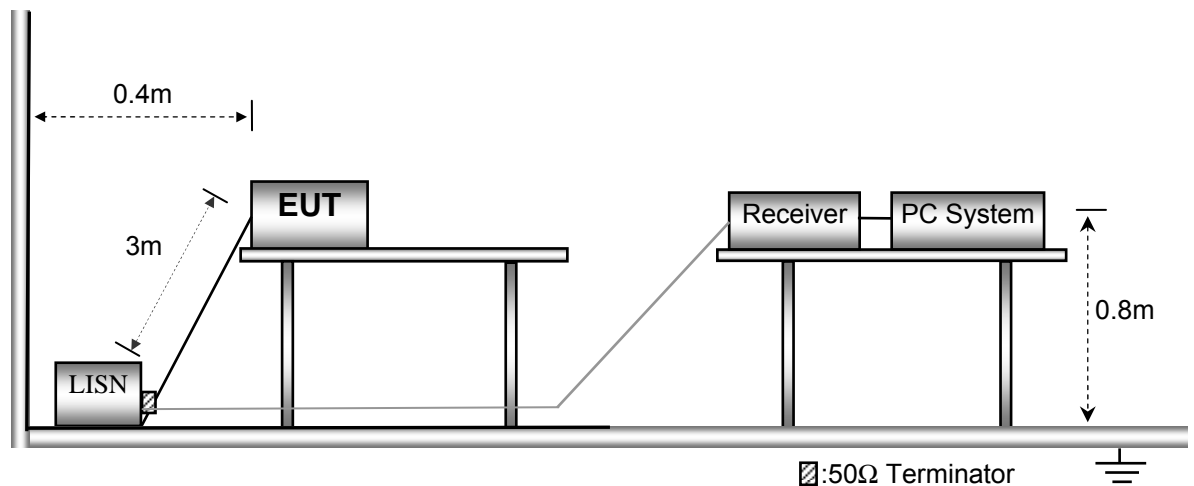


7.3 Measurement Description

The maximised peak emissions from the EUT was scanned and measured for both the Live and Neutral Lines. Quasi-peak & average measurements were performed if peak emissions were within 6dB of the average limit line.

7.4 Conducted Emission Test Result


An initial pre-scan was performed on the live and neutral lines.

Live line:

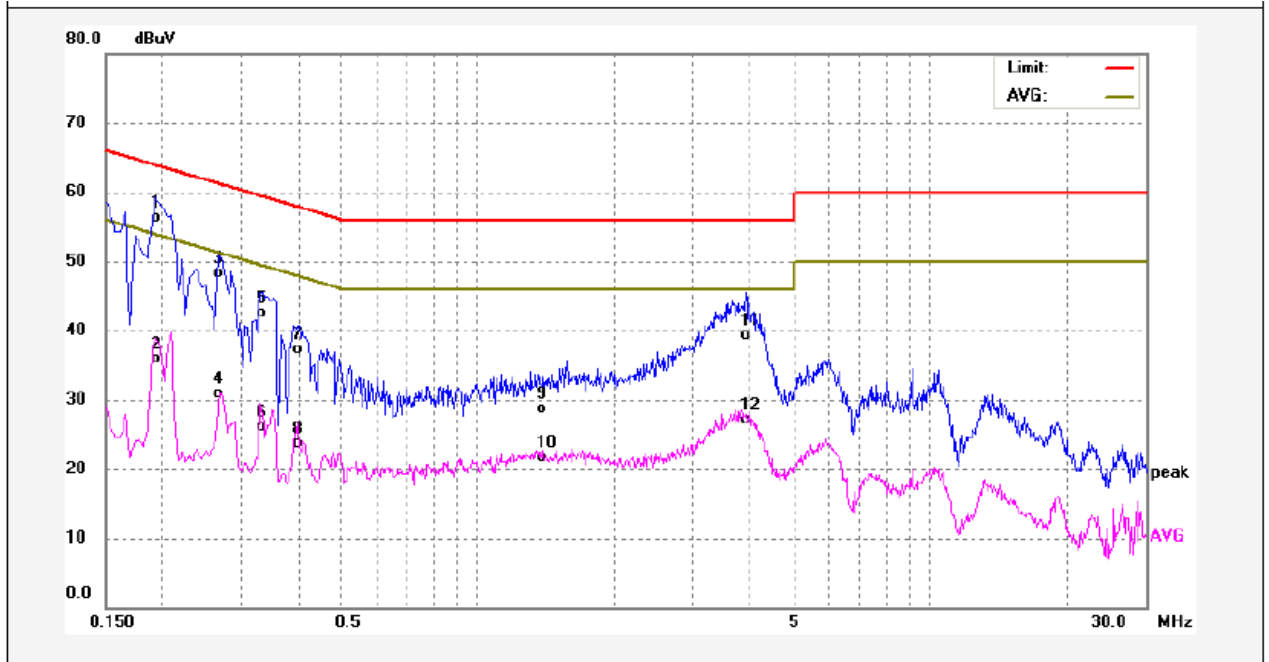

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Margin (dB)	Detector	Remark
1	0.1940	46.14	10.26	56.40	63.86	-7.46	QP	
2	0.1940	25.60	10.26	35.86	53.86	-18.00	AVG	
3	0.2660	37.94	10.27	48.21	61.24	-13.03	QP	
4	0.2660	20.69	10.27	30.96	51.24	-20.28	AVG	
5	0.3339	32.14	10.29	42.43	59.35	-16.92	QP	
6	0.3339	15.81	10.29	26.10	49.35	-23.25	AVG	
7	0.3980	27.00	10.27	37.27	57.89	-20.62	QP	
8	0.3980	13.34	10.27	23.61	47.89	-24.28	AVG	
9	1.3900	18.34	10.42	28.76	56.00	-27.24	QP	
10	1.3900	11.27	10.42	21.69	46.00	-24.31	AVG	
11	3.9220	28.72	10.51	39.23	56.00	-16.77	QP	
12	3.9220	16.63	10.51	27.14	46.00	-18.86	AVG	

Neutral line:

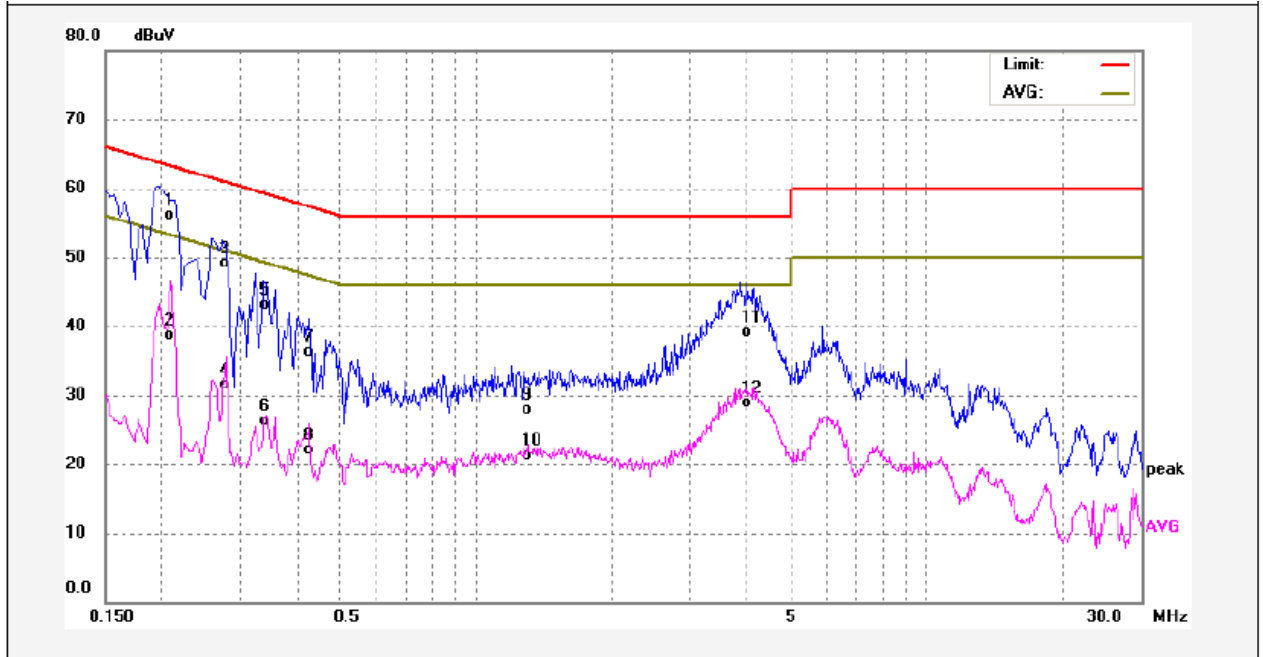

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Margin (dB)	Detector	Remark
1	0.2100	45.83	10.26	56.09	63.20	-7.11	QP	
2	0.2100	28.37	10.26	38.63	53.20	-14.57	AVG	
3	0.2779	38.81	10.27	49.08	60.88	-11.80	QP	
4	0.2779	21.15	10.27	31.42	50.88	-19.46	AVG	
5	0.3420	32.88	10.29	43.17	59.15	-15.98	QP	
6	0.3420	16.05	10.29	26.34	49.15	-22.81	AVG	
7	0.4260	26.05	10.26	36.31	57.33	-21.02	QP	
8	0.4260	11.77	10.26	22.03	47.33	-25.30	AVG	
9	1.3060	17.54	10.42	27.96	56.00	-28.04	QP	
10	1.3060	10.79	10.42	21.21	46.00	-24.79	AVG	
11	4.0060	28.60	10.51	39.11	56.00	-16.89	QP	
12	4.0060	18.45	10.51	28.96	46.00	-17.04	AVG	

8 Radiated Emissions

Test Requirement: FCC CFR47 Part 15 Section 15.209 & 15.247

Test Method: ANSI C63.10:2013

Test Result: PASS

Measurement Distance: 3m

Limit:

Frequency (MHz)	Field Strength		Field Strength Limit at 3m Measurement Dist	
	uV/m	Distance (m)	uV/m	dBuV/m
0.009 ~ 0.490	$2400/F(\text{kHz})$	300	$10000 * 2400/F(\text{kHz})$	$20\log^{(2400/F(\text{kHz}))} + 80$
0.490 ~ 1.705	$24000/F(\text{kHz})$	30	$100 * 24000/F(\text{kHz})$	$20\log^{(24000/F(\text{kHz}))} + 40$
1.705 ~ 30	30	30	$100 * 30$	$20\log^{(30)} + 40$
30 ~ 88	100	3	100	$20\log^{(100)}$
88 ~ 216	150	3	150	$20\log^{(150)}$
216 ~ 960	200	3	200	$20\log^{(200)}$
Above 960	500	3	500	$20\log^{(500)}$

8.1 EUT Operation

Operating Environment :

Temperature: 23.5 °C

Humidity: 52.1 % RH

Atmospheric Pressure: 101.2kPa


EUT Operation :

The test was performed in transmitting mode, the test data were shown in the report.


8.2 Test Setup

The radiated emission tests were performed in the 3m Semi- Anechoic Chamber test site, using the setup accordance with the ANSI C63.10.


The test setup for emission measurement below 30MHz.

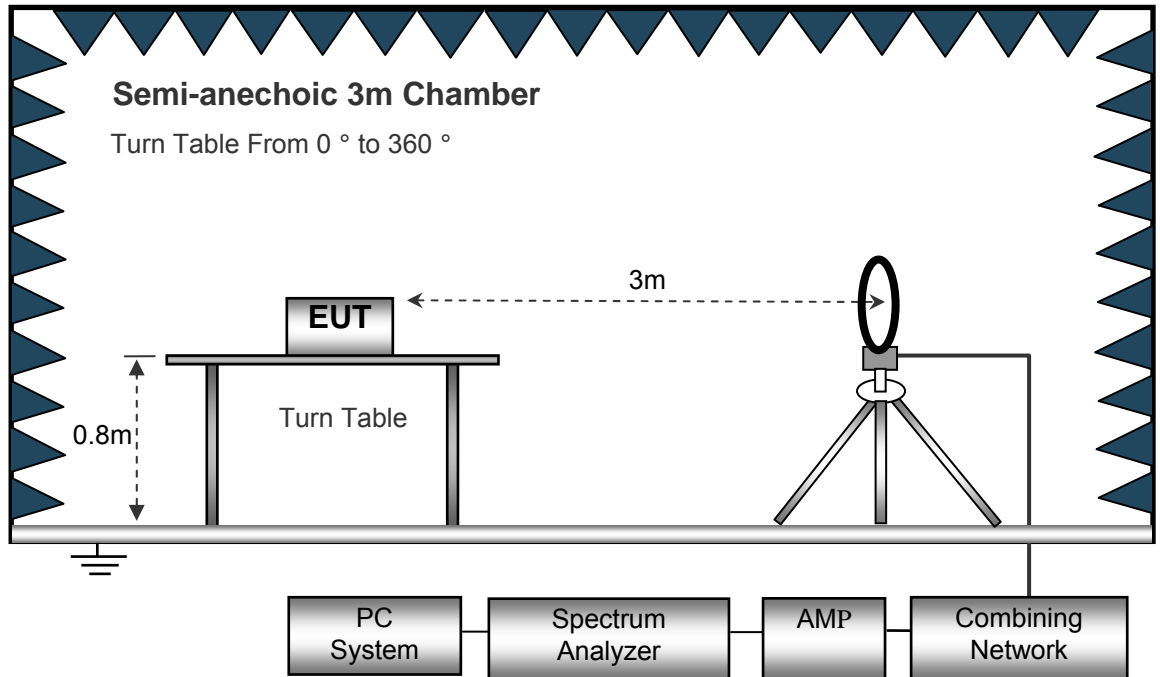

The test setup for emission measurement from 30 MHz to 1 GHz.

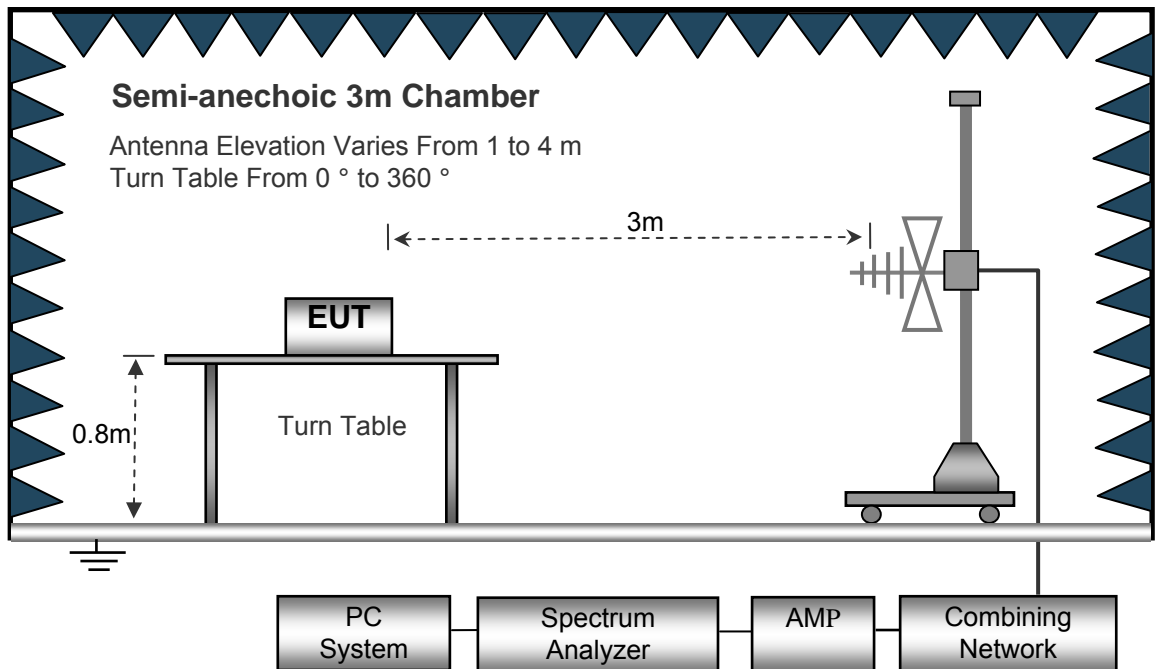

The test setup for emission measurement above 1 GHz.

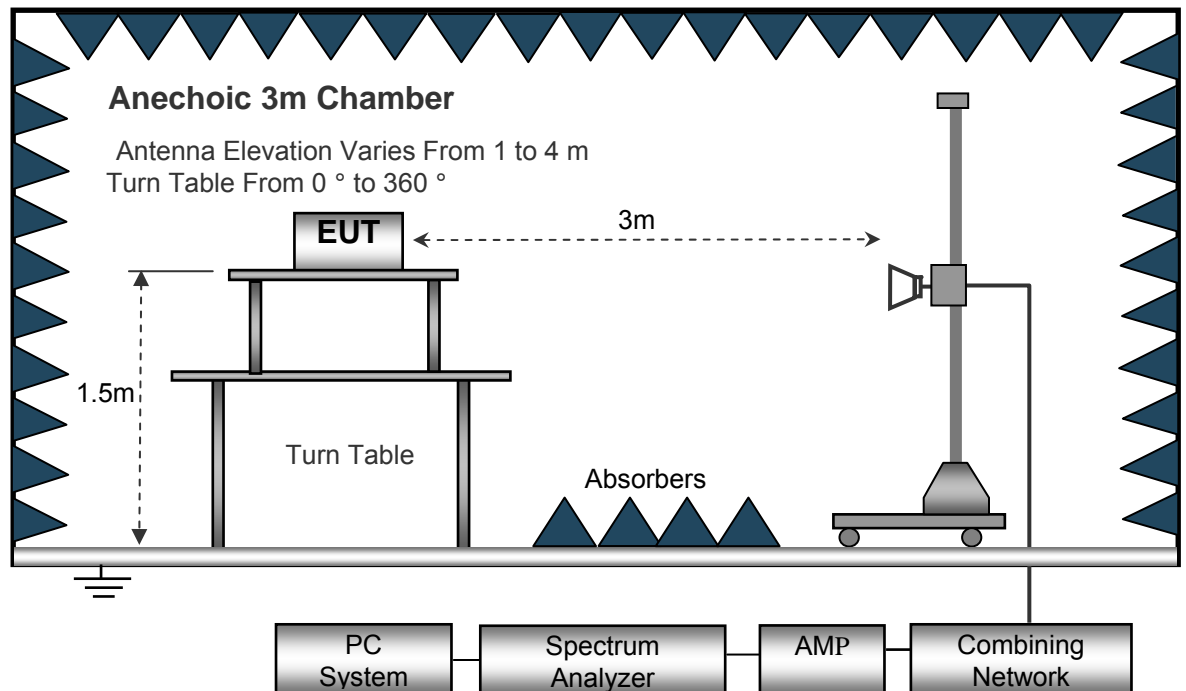

8.3 Spectrum Analyzer Setup

Below 30MHz

Sweep Speed Auto
 IF Bandwidth..... 10kHz
 Video Bandwidth..... 10kHz
 Resolution Bandwidth..... 10kHz

30MHz ~ 1GHz

Sweep Speed Auto
 Detector PK
 Resolution Bandwidth..... 100kHz
 Video Bandwidth..... 300kHz

Above 1GHz

Sweep Speed Auto
 Detector PK
 Resolution Bandwidth..... 1MHz
 Video Bandwidth..... 3MHz
 Detector Ave.
 Resolution Bandwidth..... 1MHz
 Video Bandwidth..... 10Hz

8.4 Test Procedure

1. The EUT is placed on a turntable, which is above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is moved from 1m to 4m to find out the maximum emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.
7. The radiation measurements are performed in X,Y and Z axis positioning(X denotes lying on the table, Y denotes side stand and Z denotes vertical stand),the worst condition was tested putting the eut in X axis,so the worst data were shown as follow.
8. A 2.4GHz high -pass filter is used druing radiated emissions above 1GHz measurement.

8.5 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Antenna Factor} + \text{Cable Factor} - \text{Amplifier Gain}$$

The "Margin" column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -7dB means the emission is 7dB below the maximum limit for Class B. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{Limit}$$

8.6 Summary of Test Results

Test Frequency : 32.768kHz to 30MHz

The measurements were more than 20 dB below the limit and not reported.

Test Frequency : 30MHz ~ 18GHz

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB μ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)
11b: Low Channel 2412MHz									
225.31	42.24	QP	116	1.4	H	-11.62	30.62	46.00	-15.38
225.31	37.56	QP	356	1.4	V	-11.62	25.94	46.00	-20.06
4824.00	51.25	PK	325	2.0	V	-1.06	50.19	74.00	-23.81
4824.00	47.39	Ave	325	2.0	V	-1.06	46.33	54.00	-7.67
7236.00	42.71	PK	41	1.7	H	1.33	44.04	74.00	-29.96
7236.00	40.39	Ave	41	1.7	H	1.33	41.72	54.00	-12.28
2322.78	46.57	PK	302	1.0	V	-13.19	33.38	74.00	-40.62
2322.78	38.42	Ave	302	1.0	V	-13.19	25.23	54.00	-28.77
2359.33	43.95	PK	102	1.4	H	-13.14	30.81	74.00	-43.19
2359.33	37.61	Ave	102	1.4	H	-13.14	24.47	54.00	-29.53
2483.96	44.95	PK	77	1.1	V	-13.08	31.87	74.00	-42.13
2483.96	37.12	Ave	77	1.1	V	-13.08	24.04	54.00	-29.96

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB μ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)
11b: Middle Channel 2437MHz									
225.31	42.78	QP	247	1.8	H	-11.62	31.16	46.00	-14.84
225.31	37.85	QP	60	1.4	V	-11.62	26.23	46.00	-19.77
4874.00	51.28	PK	33	1.0	V	-0.62	50.66	74.00	-23.34
4874.00	45.90	Ave	33	1.0	V	-0.62	45.28	54.00	-8.72
7311.00	43.78	PK	142	1.2	H	2.21	45.99	74.00	-28.01
7311.00	40.17	Ave	142	1.2	H	2.21	42.38	54.00	-11.62
2318.85	46.68	PK	320	1.8	V	-13.19	33.49	74.00	-40.51
2318.85	38.70	Ave	320	1.8	V	-13.19	25.51	54.00	-28.49
2370.35	43.83	PK	296	1.3	H	-13.14	30.69	74.00	-43.31
2370.35	36.17	Ave	296	1.3	H	-13.14	23.03	54.00	-30.97
2486.35	43.63	PK	132	1.2	V	-13.08	30.55	74.00	-43.45
2486.35	36.28	Ave	132	1.2	V	-13.08	23.20	54.00	-30.80

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB μ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)
11b: High Channel 2462MHz									
225.31	44.23	QP	332	1.6	H	-11.62	32.61	46.00	-13.39
225.31	38.37	QP	318	2.0	V	-11.62	26.75	46.00	-19.25
4924.00	52.19	PK	309	1.2	V	-0.24	51.95	74.00	-22.05
4924.00	45.11	Ave	309	1.2	V	-0.24	44.87	54.00	-9.13
7386.00	44.23	PK	239	1.3	H	2.84	47.07	74.00	-26.93
7386.00	40.06	Ave	239	1.3	H	2.84	42.90	54.00	-11.10
2311.61	45.53	PK	154	1.3	V	-13.19	32.34	74.00	-41.66
2311.61	37.28	Ave	154	1.3	V	-13.19	24.09	54.00	-29.91
2366.31	44.03	PK	204	1.8	H	-13.14	30.89	74.00	-43.11
2366.31	37.06	Ave	204	1.8	H	-13.14	23.92	54.00	-30.08
2494.73	44.99	PK	318	1.7	V	-13.08	31.91	74.00	-42.09
2494.73	37.00	Ave	318	1.7	V	-13.08	23.92	54.00	-30.08

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB μ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)
11g: Low Channel 2412MHz									
225.31	45.60	QP	353	1.8	H	-11.62	33.98	46.00	-12.02
225.31	36.92	QP	301	1.8	V	-11.62	25.30	46.00	-20.70
4824.00	52.60	PK	82	1.3	V	-1.06	51.54	74.00	-22.46
4824.00	44.21	Ave	82	1.3	V	-1.06	43.15	54.00	-10.85
7236.00	43.49	PK	106	1.1	H	1.33	44.82	74.00	-29.18
7236.00	40.90	Ave	106	1.1	H	1.33	42.23	54.00	-11.77
2316.45	45.80	PK	78	1.7	V	-13.19	32.61	74.00	-41.39
2316.45	38.10	Ave	78	1.7	V	-13.19	24.91	54.00	-29.09
2366.17	42.20	PK	35	2.0	H	-13.14	29.06	74.00	-44.94
2366.17	38.02	Ave	35	2.0	H	-13.14	24.88	54.00	-29.12
2493.03	43.74	PK	105	1.5	V	-13.08	30.66	74.00	-43.34
2493.03	36.79	Ave	105	1.5	V	-13.08	23.71	54.00	-30.29

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB μ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)
11g: Middle Channel 2437MHz									
225.31	46.11	QP	335	1.4	H	-11.62	34.49	46.00	-11.51
225.31	37.47	QP	277	1.7	V	-11.62	25.85	46.00	-20.15
4874.00	53.42	PK	213	1.2	V	-0.62	52.80	74.00	-21.20
4874.00	45.30	Ave	213	1.2	V	-0.62	44.68	54.00	-9.32
7311.00	42.98	PK	274	1.9	H	2.21	45.19	74.00	-28.81
7311.00	42.09	Ave	274	1.9	H	2.21	44.30	54.00	-9.70
2335.94	46.69	PK	166	1.3	V	-13.19	33.50	74.00	-40.50
2335.94	37.66	Ave	166	1.3	V	-13.19	24.47	54.00	-29.53
2369.52	44.82	PK	45	1.9	H	-13.14	31.68	74.00	-42.32
2369.52	37.72	Ave	45	1.9	H	-13.14	24.58	54.00	-29.42
2490.72	42.76	PK	36	1.9	V	-13.08	29.68	74.00	-44.32
2490.72	38.00	Ave	36	1.9	V	-13.08	24.92	54.00	-29.08

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB μ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)
11g: High Channel 2462MHz									
225.31	46.46	QP	161	1.8	H	-11.62	34.84	46.00	-11.16
225.31	36.75	QP	357	1.2	V	-11.62	25.13	46.00	-20.87
4924.00	52.85	PK	20	1.7	V	-0.24	52.61	74.00	-21.39
4924.00	45.09	Ave	20	1.7	V	-0.24	44.85	54.00	-9.15
7386.00	43.20	PK	236	1.4	H	2.84	46.04	74.00	-27.96
7386.00	41.21	Ave	236	1.4	H	2.84	44.05	54.00	-9.95
2313.22	45.82	PK	274	1.8	V	-13.19	32.63	74.00	-41.37
2313.22	37.70	Ave	274	1.8	V	-13.19	24.51	54.00	-29.49
2375.88	44.56	PK	174	1.3	H	-13.14	31.42	74.00	-42.58
2375.88	38.84	Ave	174	1.3	H	-13.14	25.70	54.00	-28.30
2497.18	44.61	PK	322	1.2	V	-13.08	31.53	74.00	-42.47
2497.18	38.55	Ave	322	1.2	V	-13.08	25.47	54.00	-28.53

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB μ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)
n20: Low Channel 2412MHz									
225.31	46.14	QP	311	1.6	H	-11.62	34.52	46.00	-11.48
225.31	37.44	QP	157	1.3	V	-11.62	25.82	46.00	-20.18
4824.00	51.91	PK	301	1.8	V	-1.06	50.85	74.00	-23.15
4824.00	45.78	Ave	301	1.8	V	-1.06	44.72	54.00	-9.28
7236.00	44.49	PK	121	1.6	H	1.33	45.82	74.00	-28.18
7236.00	41.35	Ave	121	1.6	H	1.33	42.68	54.00	-11.32
2336.81	45.45	PK	263	1.8	V	-13.19	32.26	74.00	-41.74
2336.81	38.44	Ave	263	1.8	V	-13.19	25.25	54.00	-28.75
2357.76	42.05	PK	321	1.7	H	-13.14	28.91	74.00	-45.09
2357.76	36.37	Ave	321	1.7	H	-13.14	23.23	54.00	-30.77
2497.05	44.67	PK	236	1.6	V	-13.08	31.59	74.00	-42.41
2497.05	36.93	Ave	236	1.6	V	-13.08	23.85	54.00	-30.15

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB μ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)
n20: Middle Channel 2437MHz									
225.31	47.31	QP	258	1.7	H	-11.62	35.69	46.00	-10.31
225.31	38.78	QP	108	1.2	V	-11.62	27.16	46.00	-18.84
4874.00	52.92	PK	319	1.3	V	-0.62	52.30	74.00	-21.70
4874.00	47.27	Ave	319	1.3	V	-0.62	46.65	54.00	-7.35
7311.00	44.33	PK	31	1.0	H	2.21	46.54	74.00	-27.46
7311.00	41.66	Ave	31	1.0	H	2.21	43.87	54.00	-10.13
2311.19	45.79	PK	162	1.0	V	-13.19	32.60	74.00	-41.40
2311.19	39.42	Ave	162	1.0	V	-13.19	26.23	54.00	-27.77
2352.95	43.30	PK	201	1.6	H	-13.14	30.16	74.00	-43.84
2352.95	38.73	Ave	201	1.6	H	-13.14	25.59	54.00	-28.41
2493.30	42.84	PK	169	1.4	V	-13.08	29.76	74.00	-44.24
2493.30	38.26	Ave	169	1.4	V	-13.08	25.18	54.00	-28.82

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB μ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)
n20: High Channel 2462MHz									
225.31	46.87	QP	352	1.0	H	-11.62	35.25	46.00	-10.75
225.31	39.80	QP	175	1.5	V	-11.62	28.18	46.00	-17.82
4924.00	51.57	PK	276	1.5	V	-0.24	51.33	74.00	-22.67
4924.00	47.95	Ave	276	1.5	V	-0.24	47.71	54.00	-6.29
7386.00	44.98	PK	248	1.0	H	2.84	47.82	74.00	-26.18
7386.00	41.96	Ave	248	1.0	H	2.84	44.80	54.00	-9.20
2342.24	46.31	PK	211	1.5	V	-13.19	33.12	74.00	-40.88
2342.24	39.99	Ave	211	1.5	V	-13.19	26.80	54.00	-27.20
2363.38	43.55	PK	202	1.4	H	-13.14	30.41	74.00	-43.59
2363.38	38.56	Ave	202	1.4	H	-13.14	25.42	54.00	-28.58
2496.67	44.50	PK	105	2.0	V	-13.08	31.42	74.00	-42.58
2496.67	38.67	Ave	105	2.0	V	-13.08	25.59	54.00	-28.41

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB μ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)
n40: Low Channel 2422MHz									
225.31	47.44	QP	284	1.9	H	-11.62	35.82	46.00	-10.18
225.31	38.50	QP	148	1.8	V	-11.62	26.88	46.00	-19.12
4844.00	48.61	PK	76	1.4	V	-1.06	47.55	74.00	-26.45
4844.00	45.31	Ave	76	1.4	V	-1.06	44.25	54.00	-9.75
7266.00	43.81	PK	66	1.0	H	1.33	45.14	74.00	-28.86
7266.00	40.14	Ave	66	1.0	H	1.33	41.47	54.00	-12.53
2315.21	45.70	PK	161	1.6	V	-13.19	32.51	74.00	-41.49
2315.21	39.99	Ave	161	1.6	V	-13.19	26.80	54.00	-27.20
2367.83	43.93	PK	93	1.4	H	-13.14	30.79	74.00	-43.21
2367.83	36.79	Ave	93	1.4	H	-13.14	23.65	54.00	-30.35
2494.79	42.03	PK	286	1.2	V	-13.08	28.95	74.00	-45.05
2494.79	38.81	Ave	286	1.2	V	-13.08	25.73	54.00	-28.27

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB μ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)
n40: Middle Channel 2437MHz									
225.31	46.50	QP	110	1.7	H	-11.62	34.88	46.00	-11.12
225.31	38.78	QP	65	1.3	V	-11.62	27.16	46.00	-18.84
4874.00	48.44	PK	211	1.2	V	-0.62	47.82	74.00	-26.18
4874.00	44.73	Ave	211	1.2	V	-0.62	44.11	54.00	-9.89
7311.00	42.84	PK	241	1.2	H	2.21	45.05	74.00	-28.95
7311.00	39.42	Ave	241	1.2	H	2.21	41.63	54.00	-12.37
2345.38	45.29	PK	259	1.9	V	-13.19	32.10	74.00	-41.90
2345.38	39.25	Ave	259	1.9	V	-13.19	26.06	54.00	-27.94
2371.85	43.21	PK	308	1.7	H	-13.14	30.07	74.00	-43.93
2371.85	36.48	Ave	308	1.7	H	-13.14	23.34	54.00	-30.66
2490.38	43.91	PK	45	1.3	V	-13.08	30.83	74.00	-43.17
2490.38	37.82	Ave	45	1.3	V	-13.08	24.74	54.00	-29.26

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB μ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)
n40: High Channel 2452MHz									
225.31	45.77	QP	266	1.2	H	-11.62	34.15	46.00	-11.85
225.31	39.23	QP	157	1.7	V	-11.62	27.61	46.00	-18.39
4904.00	49.24	PK	328	1.9	V	-0.24	49.00	74.00	-25.00
4904.00	44.21	Ave	328	1.9	V	-0.24	43.97	54.00	-10.03
7356.00	43.75	PK	33	1.2	H	2.84	46.59	74.00	-27.41
7356.00	39.67	Ave	33	1.2	H	2.84	42.51	54.00	-11.49
2331.31	46.23	PK	273	1.3	V	-13.19	33.04	74.00	-40.96
2331.31	39.14	Ave	273	1.3	V	-13.19	25.95	54.00	-28.05
2364.75	43.23	PK	29	1.8	H	-13.14	30.09	74.00	-43.91
2364.75	36.19	Ave	29	1.8	H	-13.14	23.05	54.00	-30.95
2487.88	42.20	PK	65	1.0	V	-13.08	29.12	74.00	-44.88
2487.88	38.65	Ave	65	1.0	V	-13.08	25.57	54.00	-28.43

Test Frequency: 18GHz~25GHz

The measurements were more than 20 dB below the limit and not reported.

9 Band Edge Measurement


Test Requirement:	FCC CFR47 Part 15 Section 15.247
Test Method:	558074 D01 DTS Meas Guidance v03r04
Test Limit:	Regulation 15.247 (d), In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).
Test Mode:	Transmitting

9.1 Test Produce


1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

9.2 Test Result


Test result plots shown as follows:

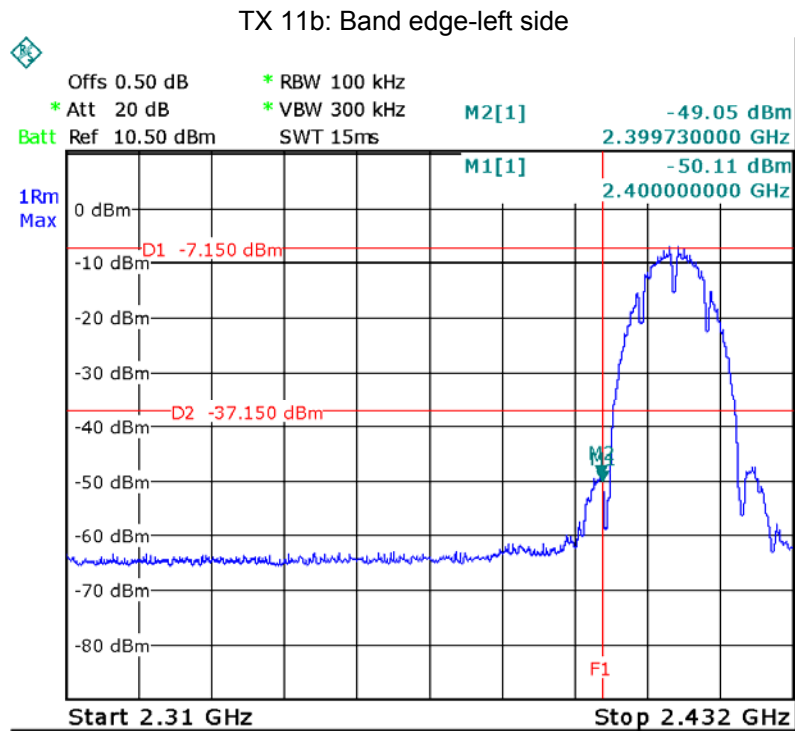


TX 11b: Band edge-right side

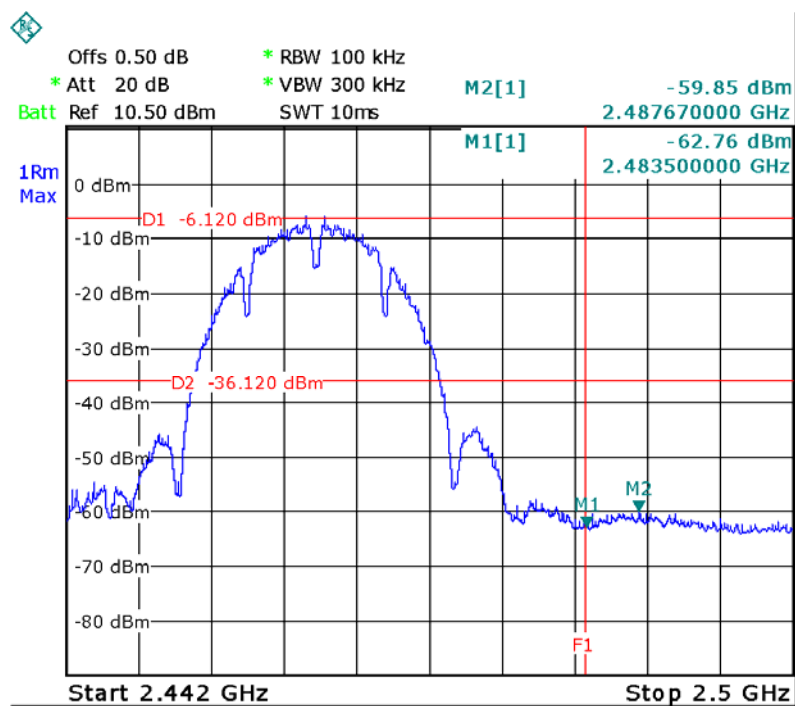


TX 11g: Band edge-left side

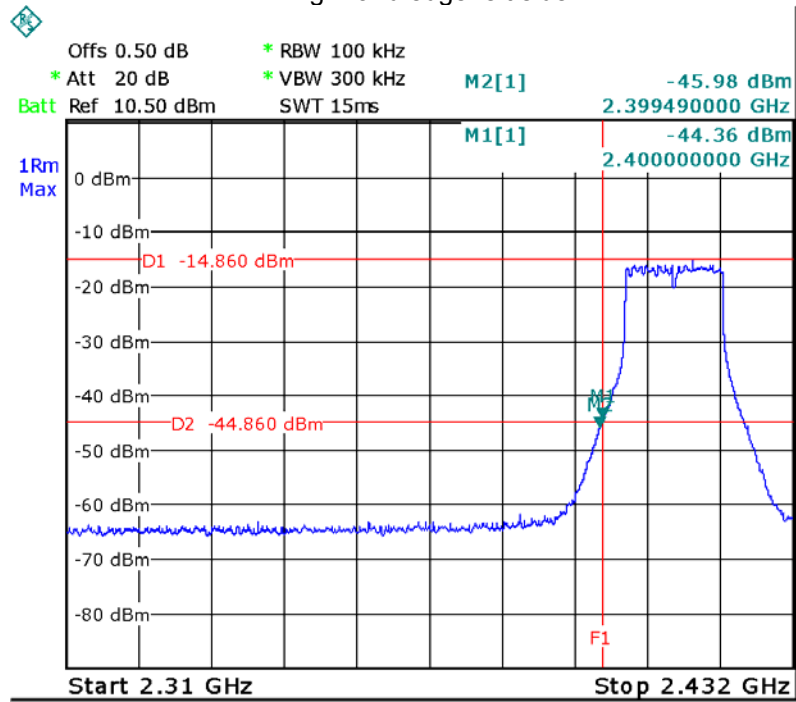


TX 11g: Band edge-right side

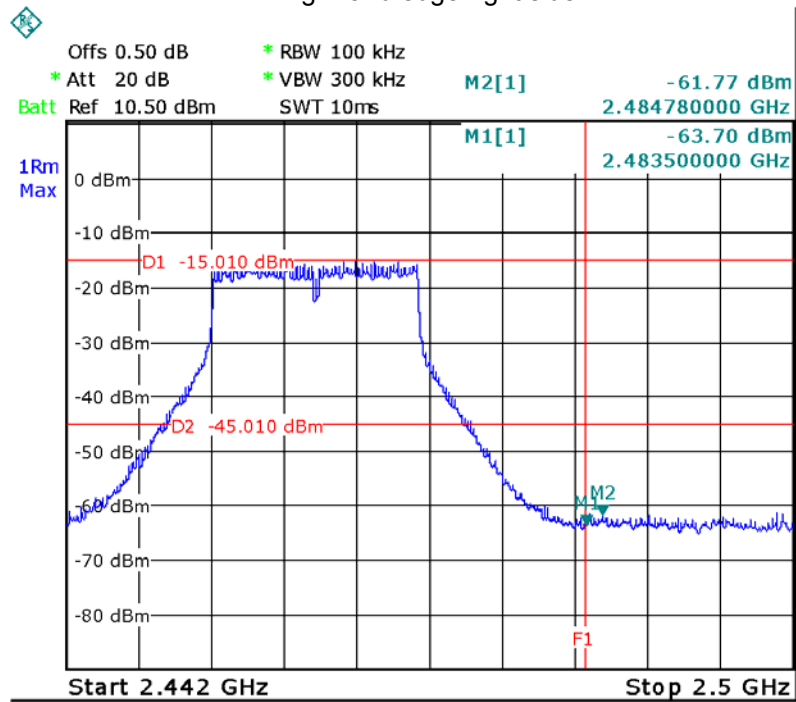


TX 11n HT20: Band edge-left side

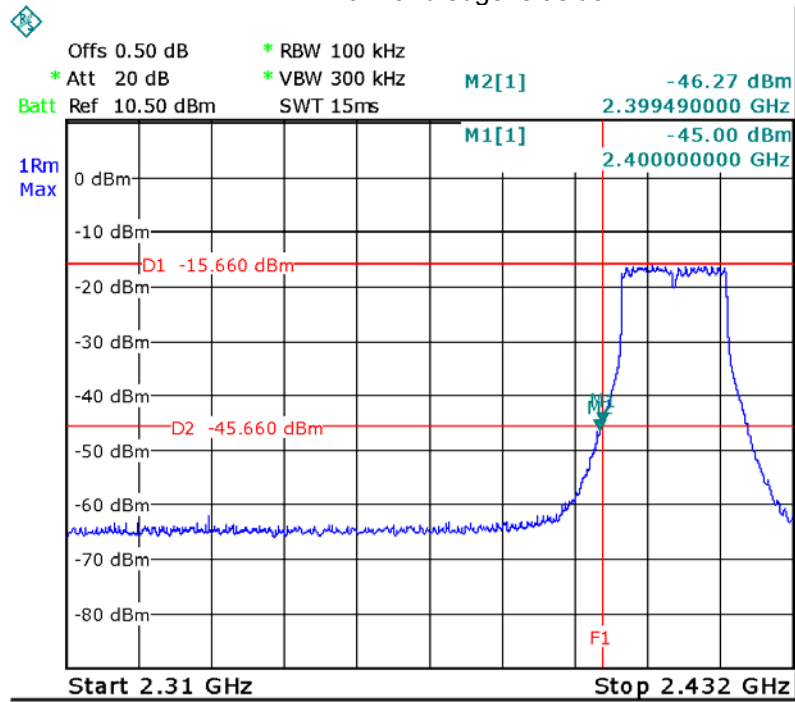


TX 11n HT20: Band edge-right side

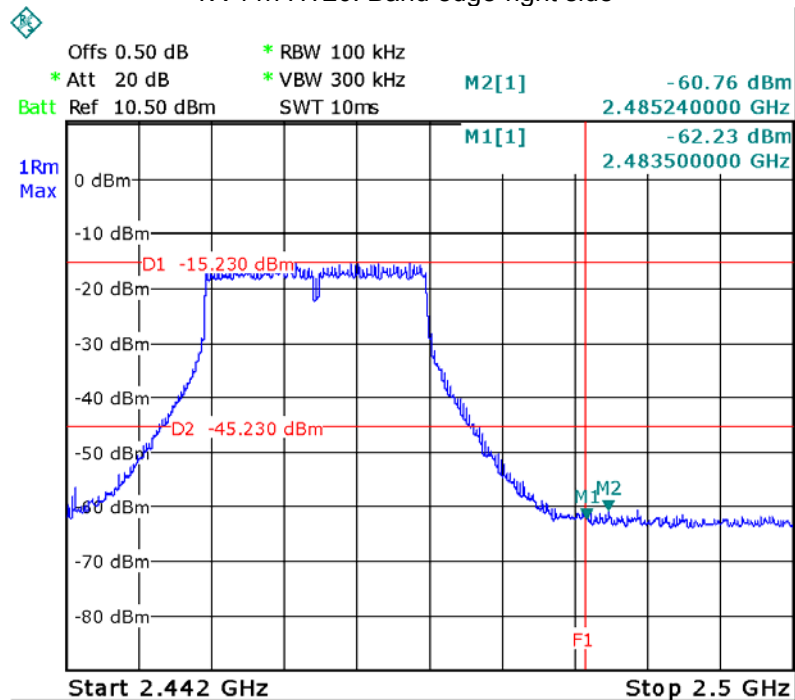

TX 11n HT40: Band edge-left side

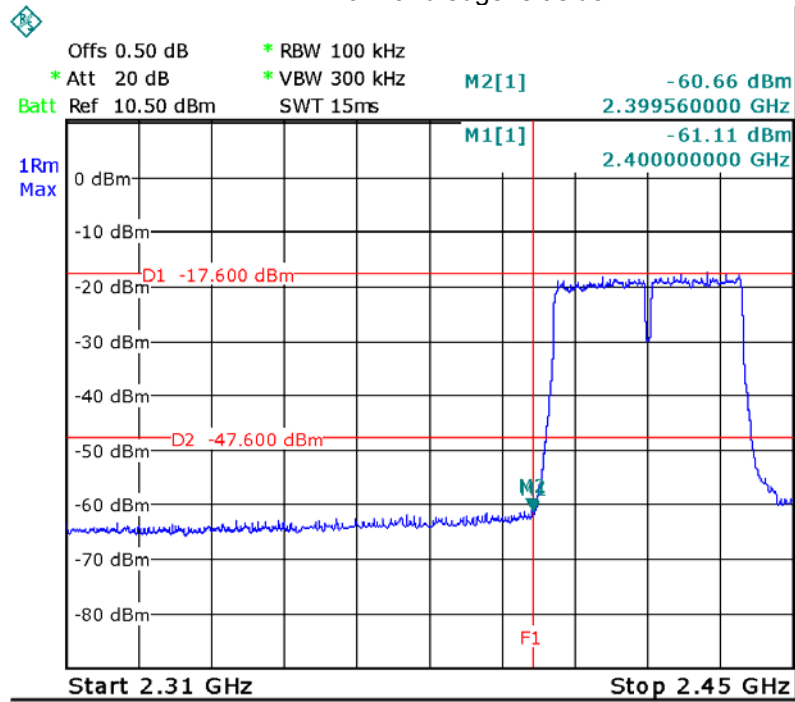

TX 11n HT40: Band edge-right side

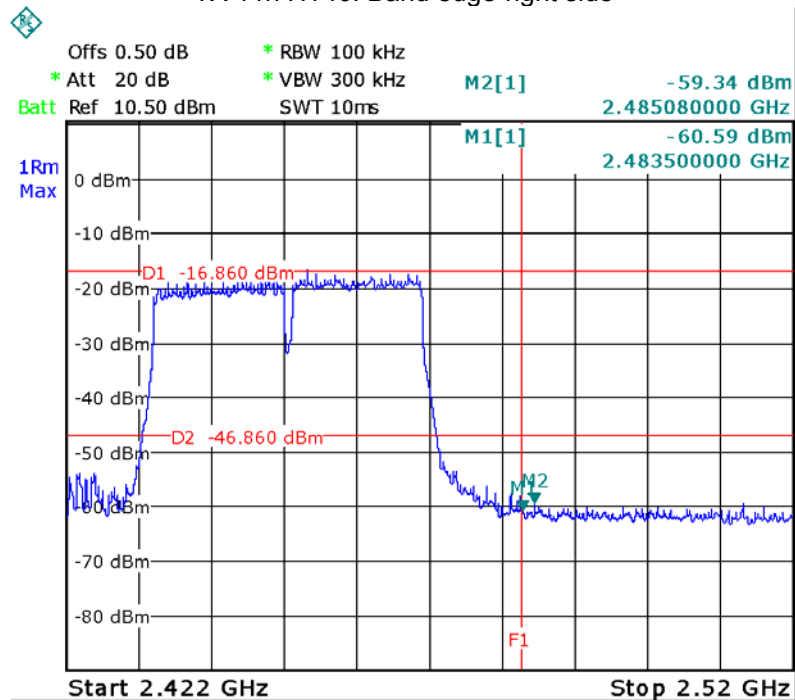

10 6 dB Bandwidth Measurement

Test Requirement: FCC CFR47 Part 15 Section 15.247

Test Method: 558074 D01 DTS Meas Guidance v03r04



10.1 Test Procedure:



1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer: RBW = 100kHz, VBW = 300kHz



10.2 Test Result:

Operation mode	Bandwidth (MHz)		
	Channel 1	Channel 6	Channel 11
TX 11b	Channel 1	Channel 6	Channel 11
	10.060	10.060	10.060
TX 11g	Channel 1	Channel 6	Channel 11
	16.567	16.567	16.567
TX 11n HT20	Channel 1	Channel 6	Channel 11
	17.838	17.838	17.838
TX 11n HT40	Channel 3	Channel 6	Channel 9
	35.230	35.230	35.560


Test result plot as follows:

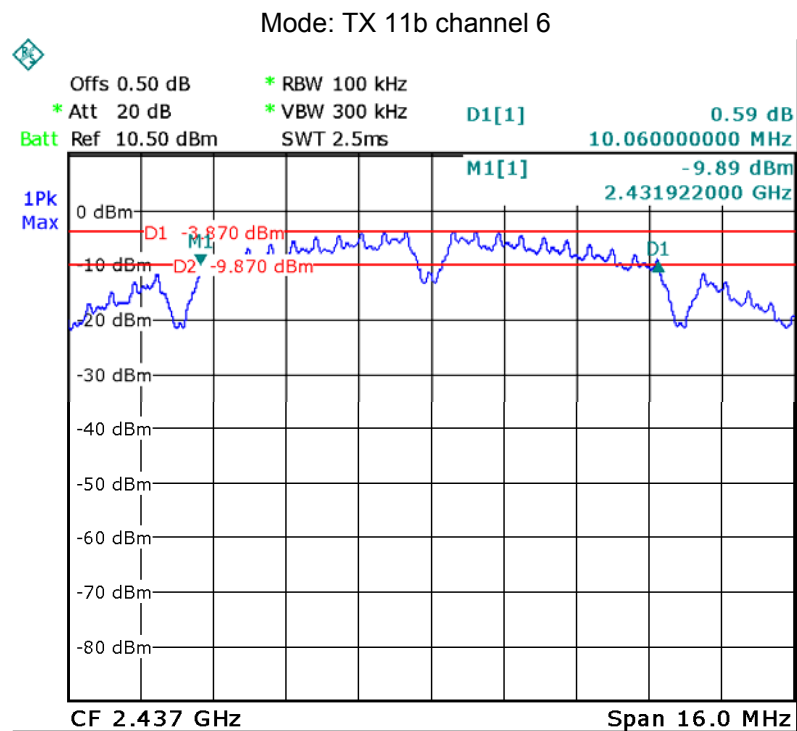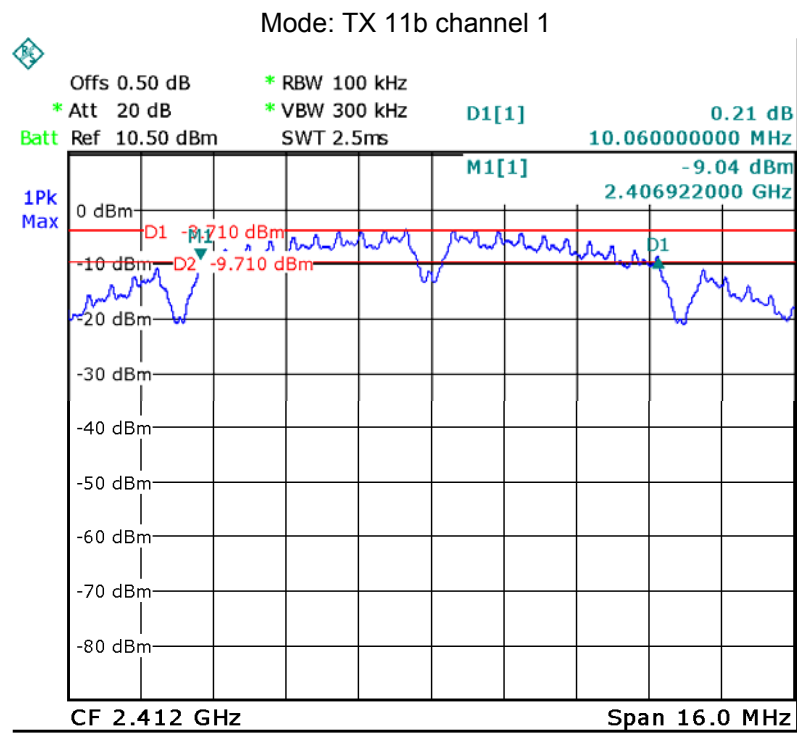

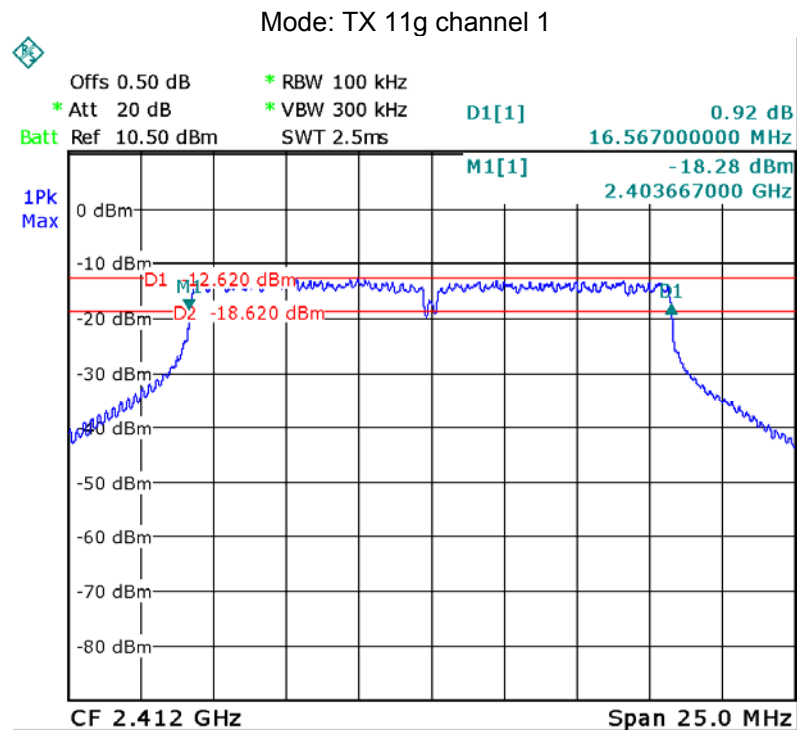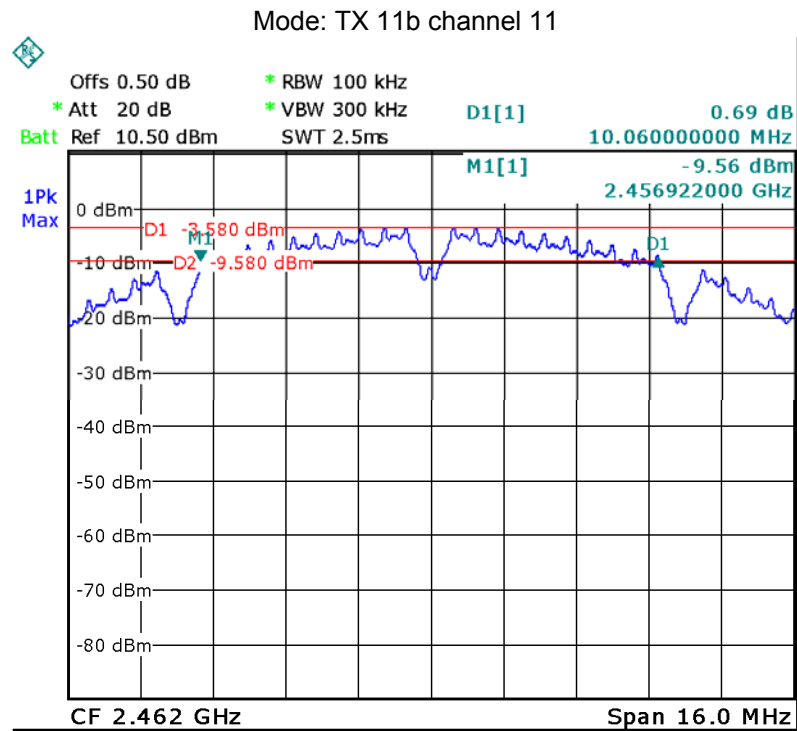


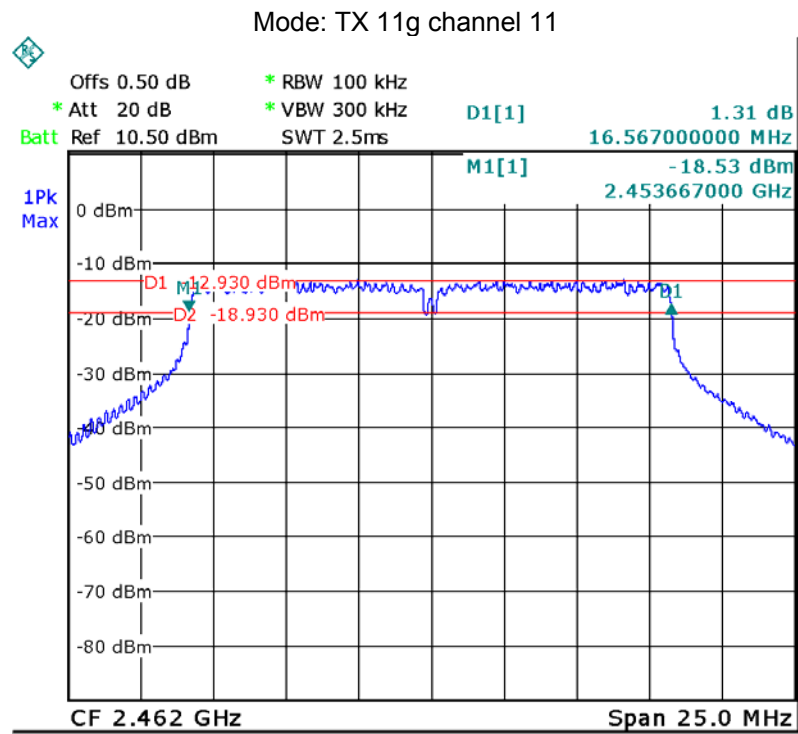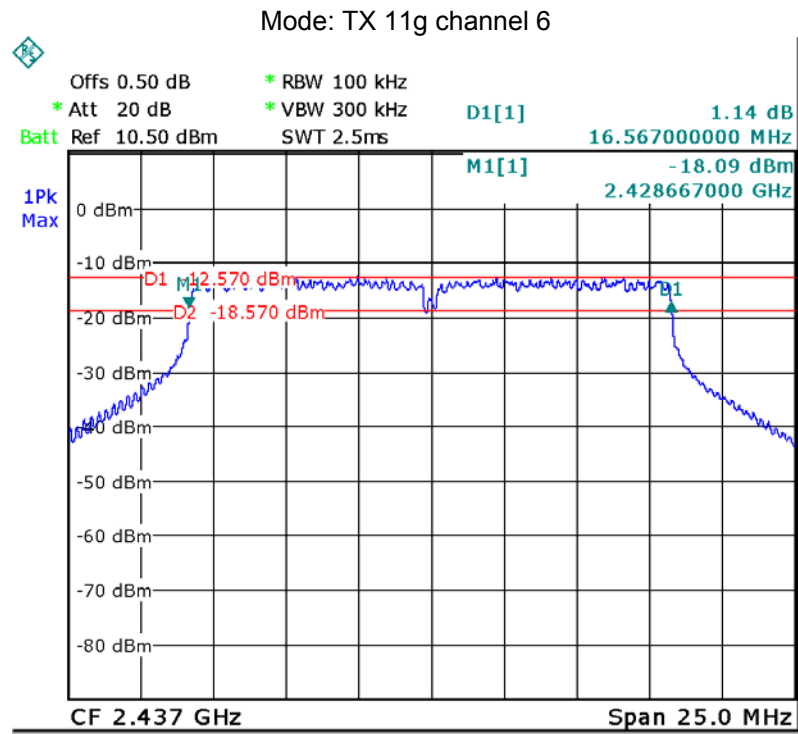


Mode: TX 11n HT20 channel 1

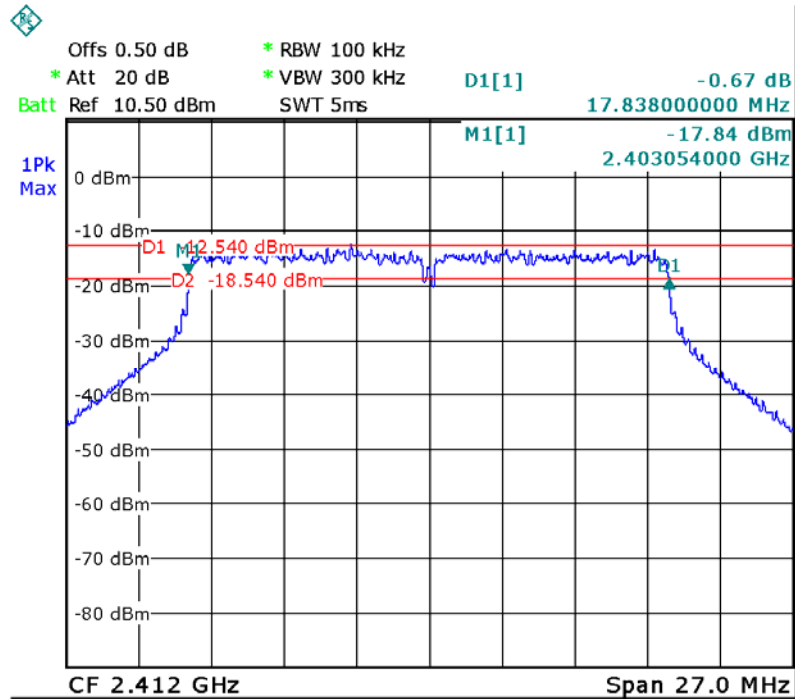


Mode: TX 11n HT20 channel 6


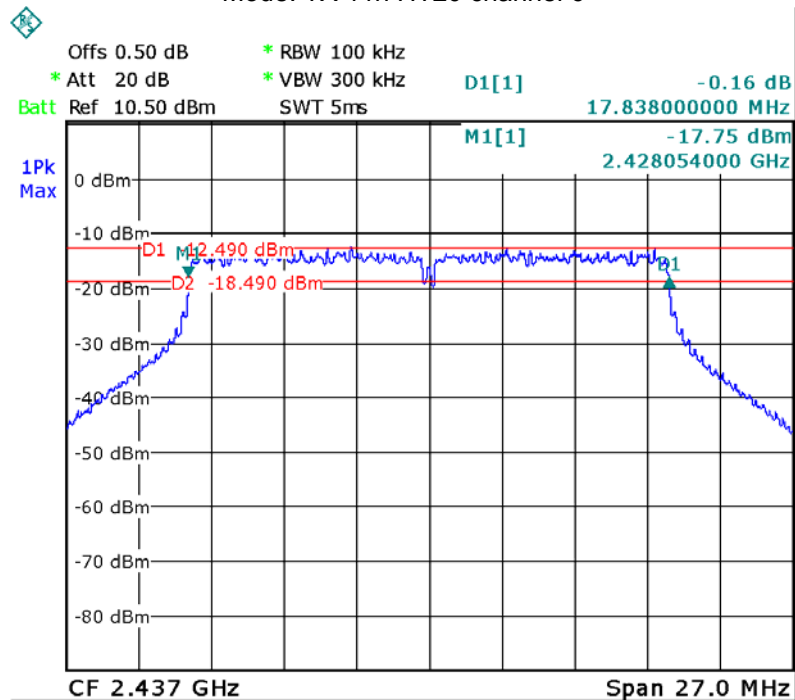


Mode: TX 11n HT20 channel 11

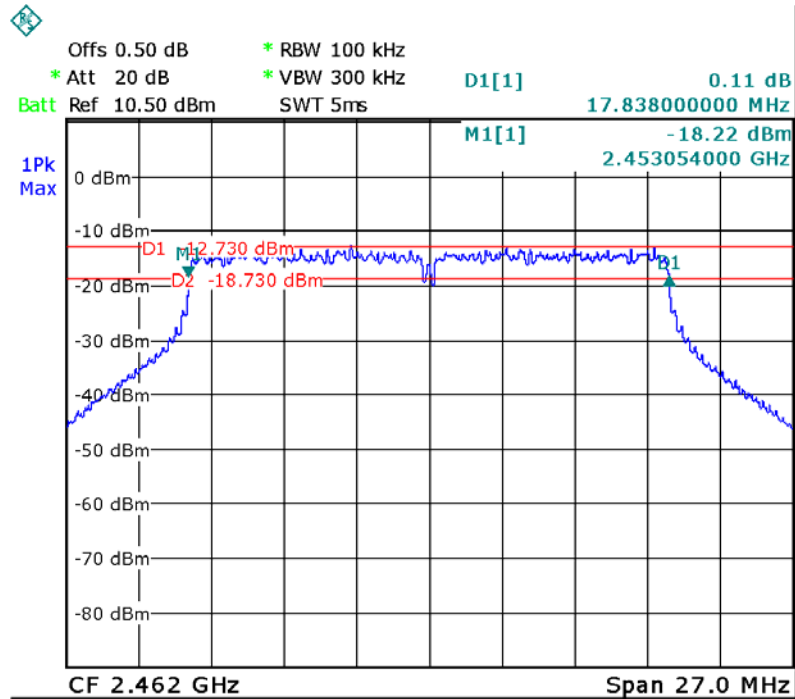

Mode: TX 11n HT40 channel 3

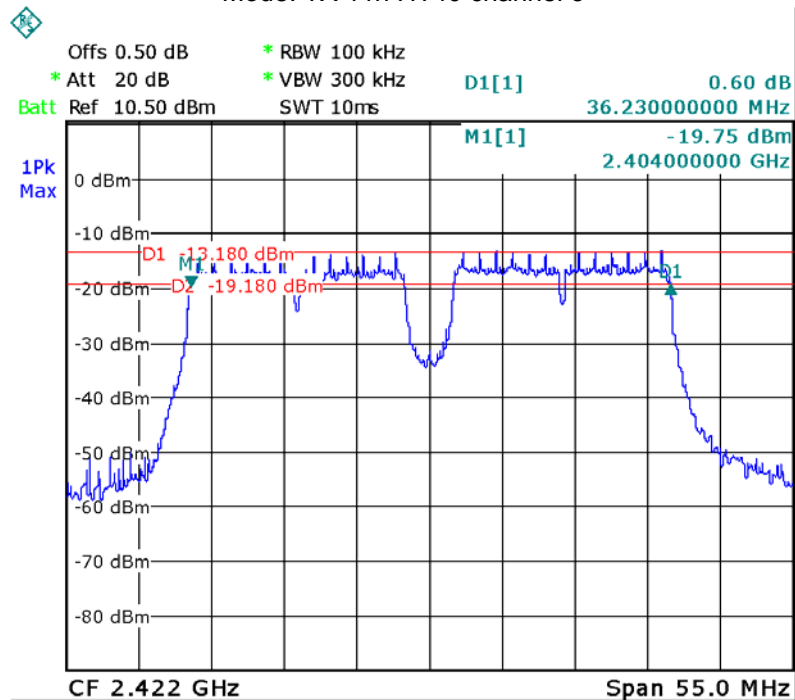

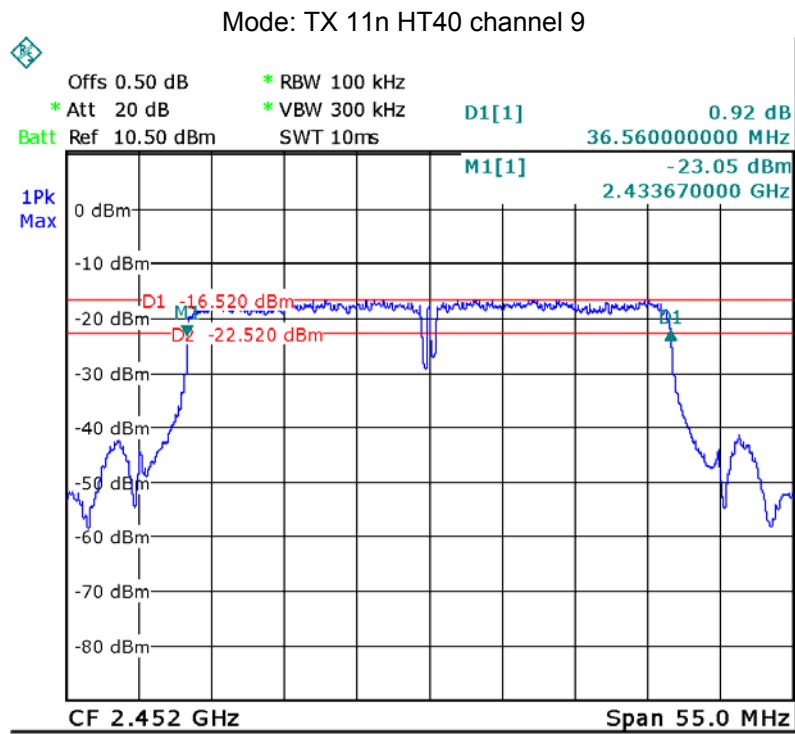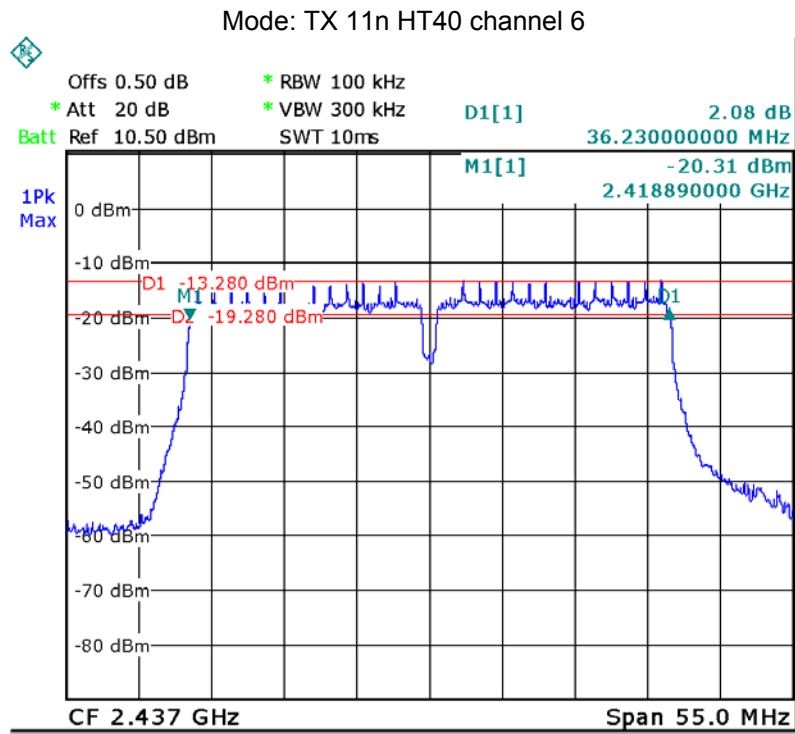

11 Maximum Peak Output Power

Test Requirement: FCC CFR47 Part 15 Section 15.247

Test Method: 558074 D01 DTS Meas Guidance v03r04

11.1 Test Procedure:

558074 D01 DTS Meas Guidance v03r04 section 9.1.2

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 1 MHz. VBW = 3 MHz. Sweep = auto; Detector Function = Peak, Set the span to fully encompass the DTS bandwidth.
3. Keep the EUT in transmitting at lowest, medium and highest channel individually. Record the max value.

11.2 Test Result:


Test mode :TX 11b		
10 Maximum Peak Output Power (dBm)		
2412MHz	2437MHz	2462MHz
9.51	9.24	9.58
Limit: 1W/30dBm		

Test mode :TX 11g		
10 Maximum Peak Output Power (dBm)		
2412MHz	2437MHz	2462MHz
9.25	9.65	9.33
Limit: 1W/30dBm		


Test mode :TX 11n HT20		
10 Maximum Peak Output Power (dBm)		
2412MHz	2437MHz	2462MHz
9.38	9.58	9.49
Limit: 1W/30dBm		

Test mode : TX 11n HT40		
10 Maximum Peak Output Power (dBm)		
2422MHz	2437MHz	2452MHz
9.38	9.24	9.34
Limit: 1W/30dBm		


Mode: TX 11b channel 1

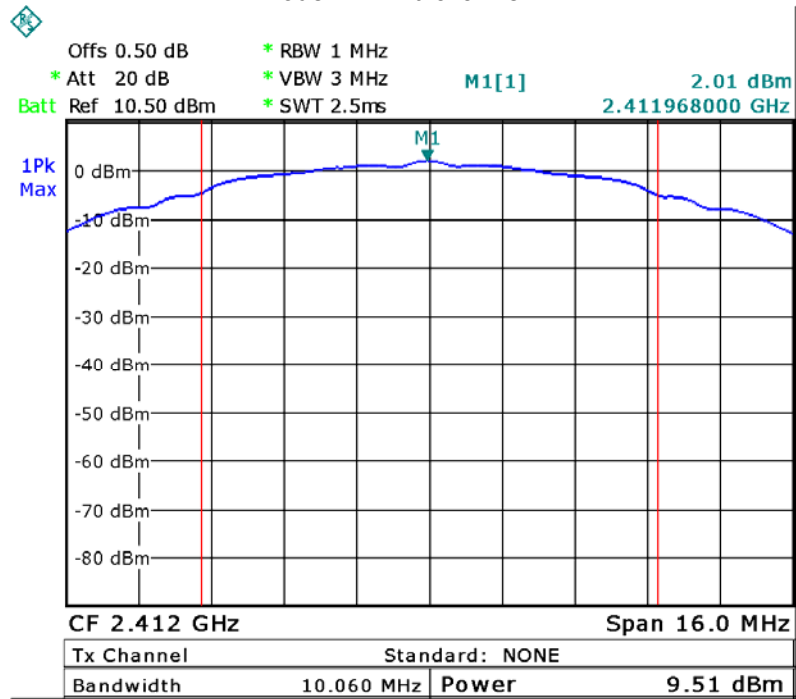


Mode: TX 11b channel 6


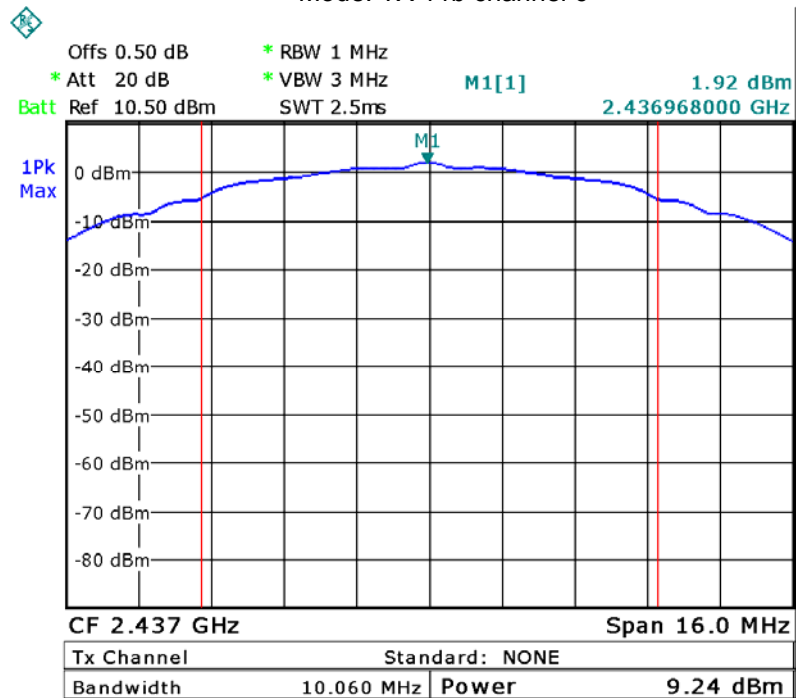


Mode: TX 11b channel 11

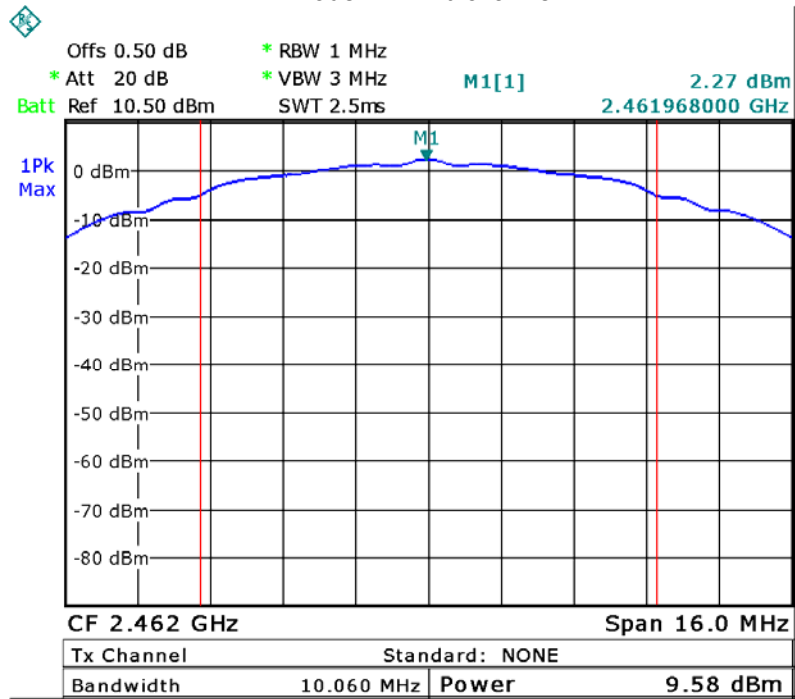


Mode :TX 11g channel 1

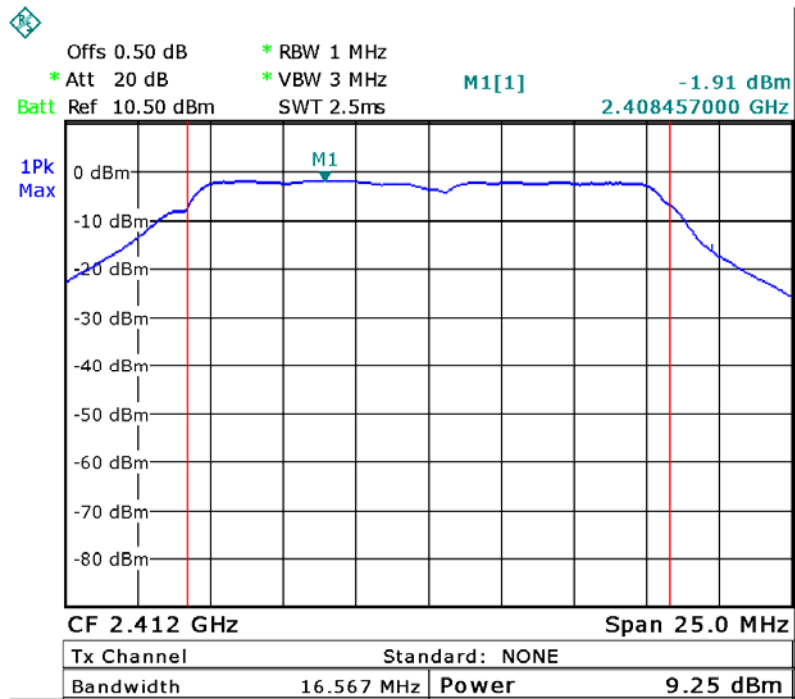


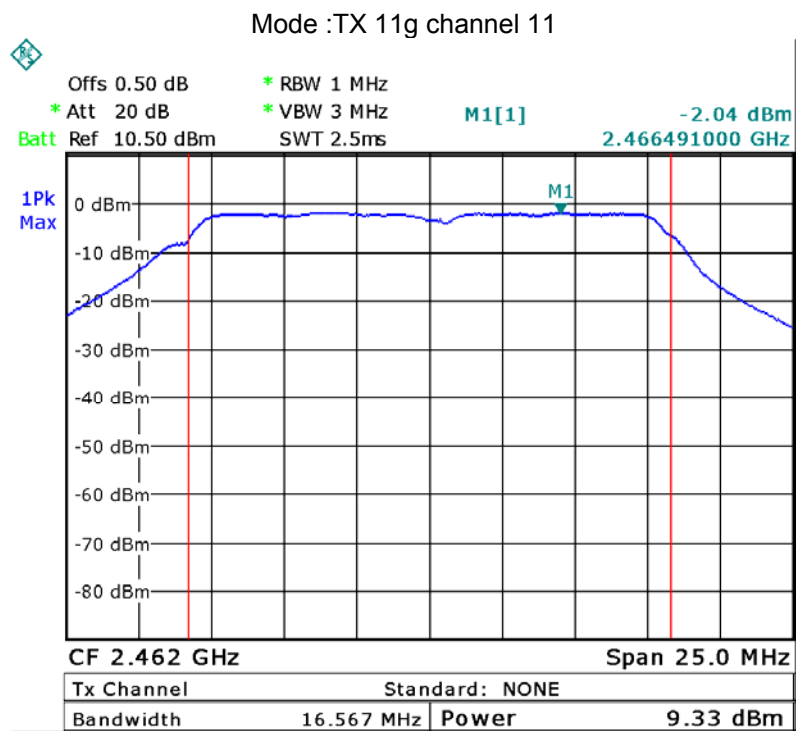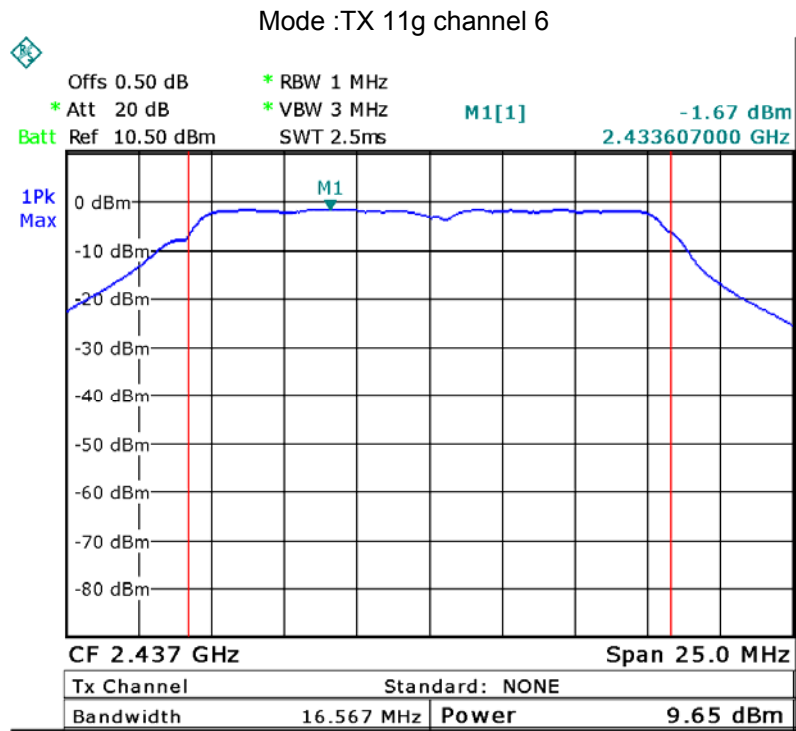


Mode: TX 11n HT20 channel 1

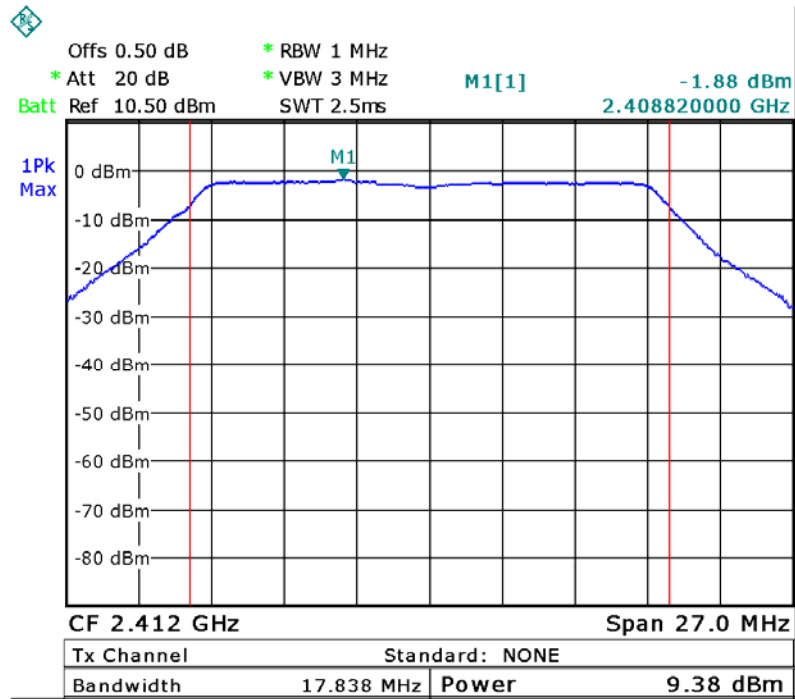


Mode: TX 11n HT20 channel 6

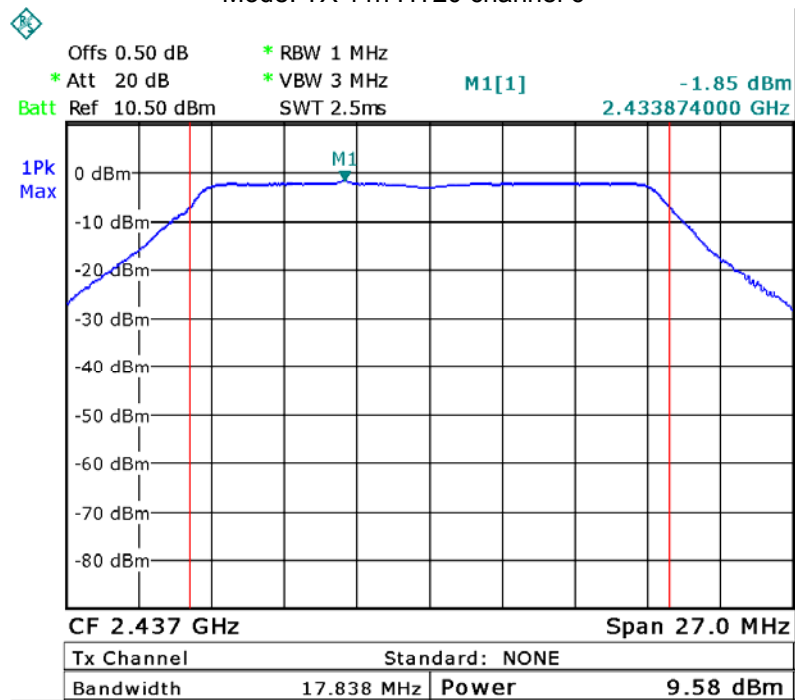


Mode: TX 11n HT20 channel 11

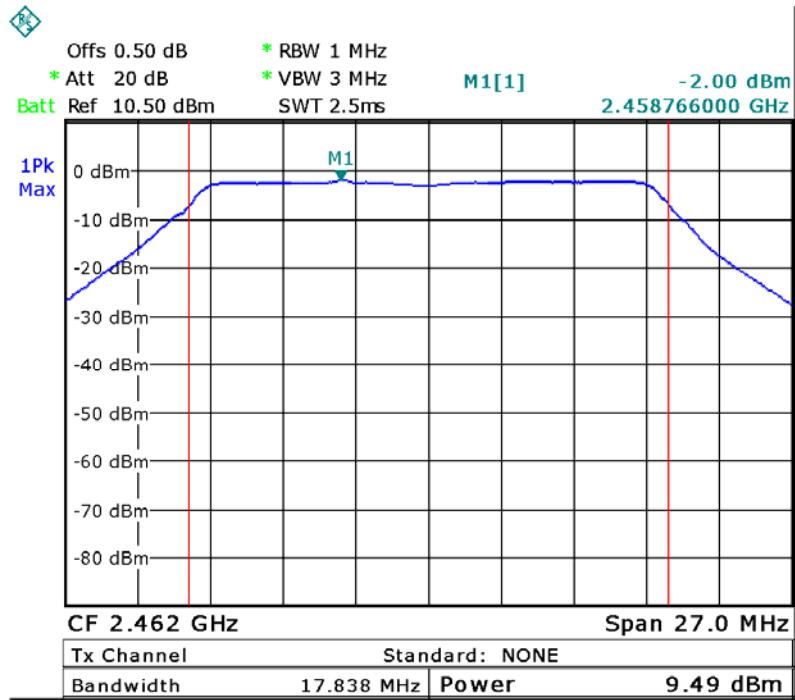


Mode: TX 11n HT40 channel 3

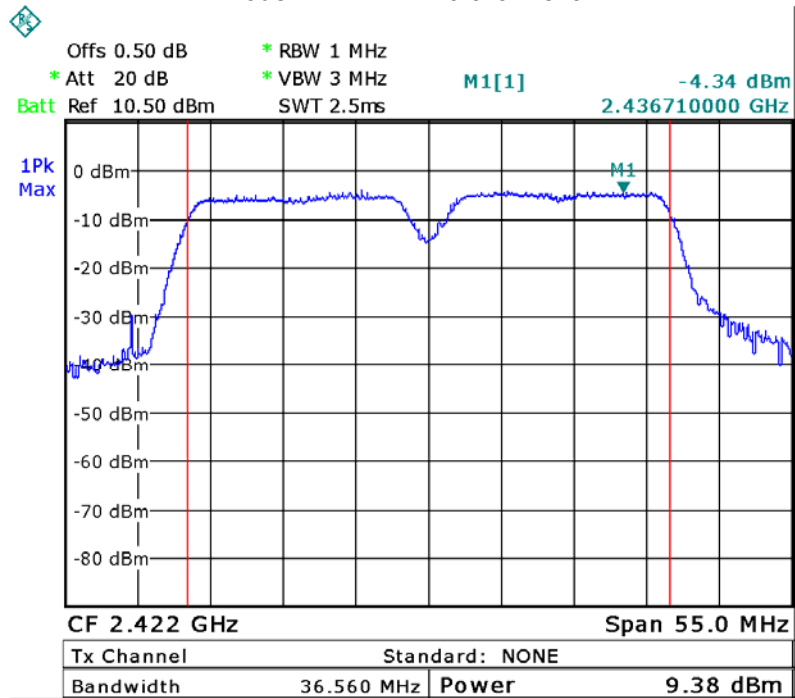

Mode: TX 11n HT40 channel 6

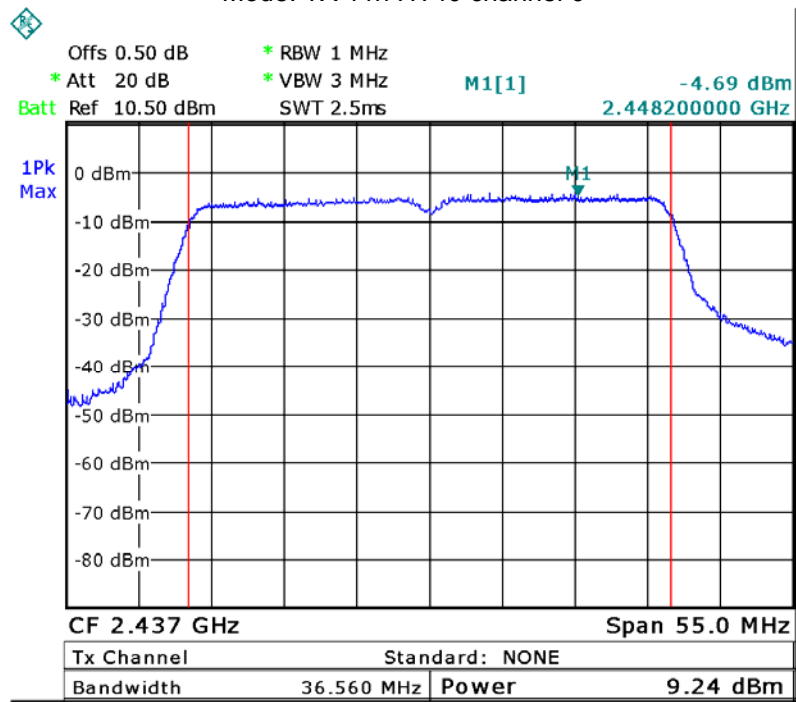

Mode: TX 11n HT40 channel 9

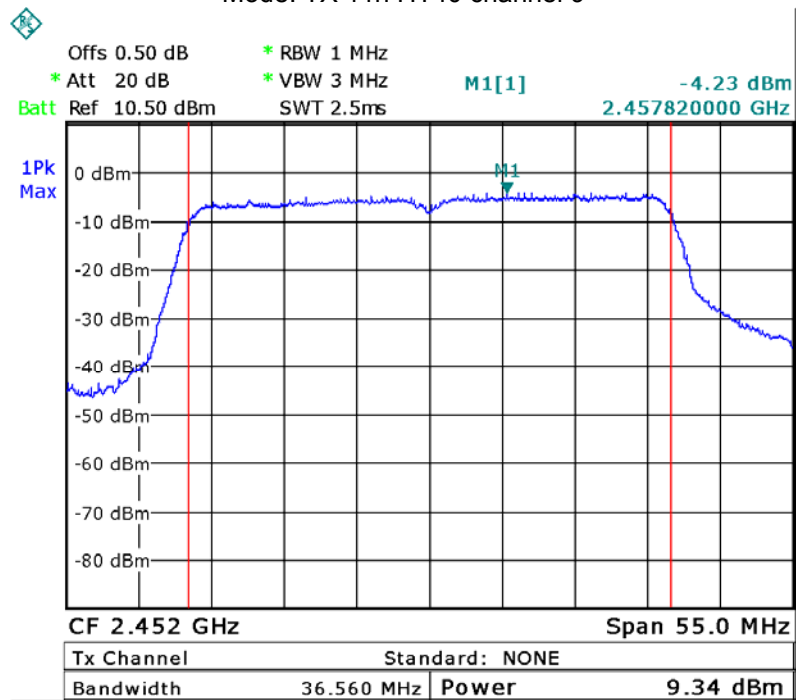

12 Power Spectral density

Test Requirement: FCC CFR47 Part 15 Section 15.247

Test Method: 558074 D01 DTS Meas Guidance v03r04

12.1 Test Procedure:

558074 D01 DTS Meas Guidance v03r04 section 10.2

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 3kHz. VBW = 10kHz , Span = 1.5 times the DTS channel bandwidth(6 dB bandwidth). Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section
Submit this plot.



12.2 Test Result:



Test mode :TX 11b		
Power Spectral (dBm per 3kHz)		
2412MHz	2437MHz	2462MHz
-19.03	-19.30	-18.73
Limit: 8dBm per 3kHz		



Test mode :TX 11g		
Power Spectral (dBm per 3kHz)		
2412MHz	2437MHz	2462MHz
-19.20	-19.36	-19.03
Limit: 8dBm per 3kHz		

Test mode :TX 11n HT20		
Power Spectral (dBm per 3kHz)		
2412MHz	2437MHz	2462MHz
-19.35	-19.52	-19.04
Limit: 8dBm per 3kHz		


Test mode : TX 11n HT40		
Power Spectral (dBm per 3kHz)		
2422MHz	2437MHz	2452MHz
-27.68	-28.36	-27.91
Limit: 8dBm per 3kHz		

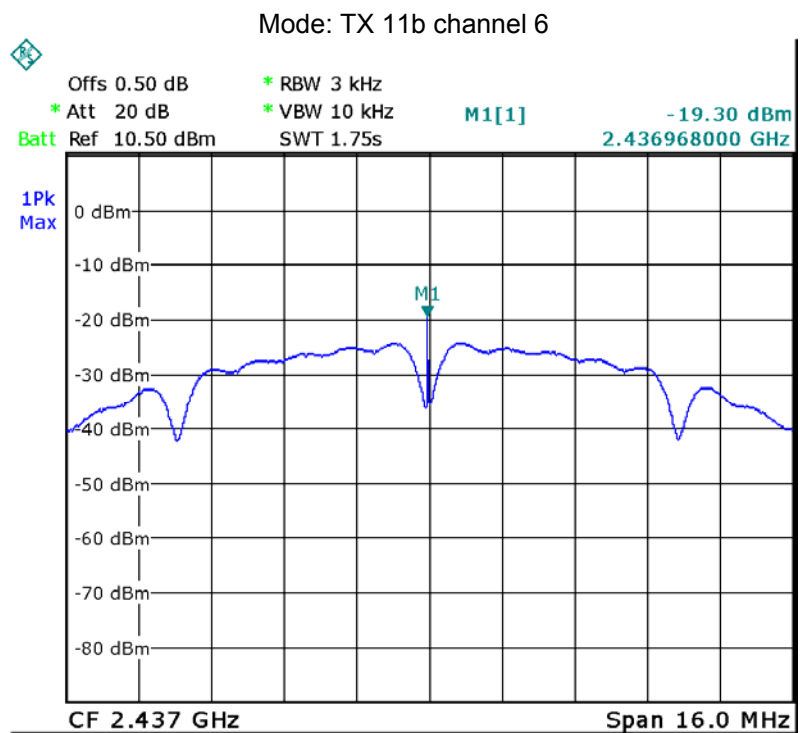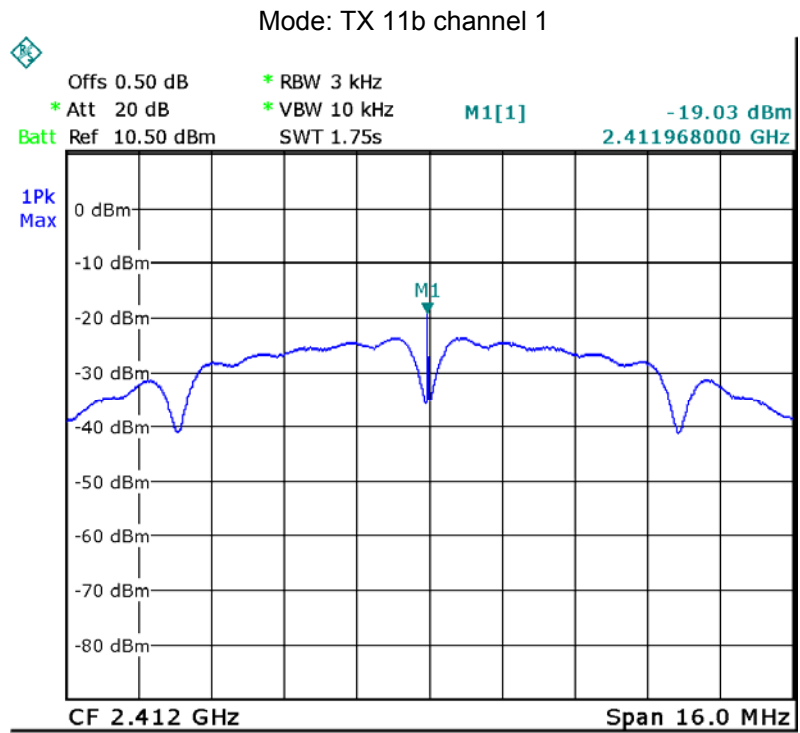

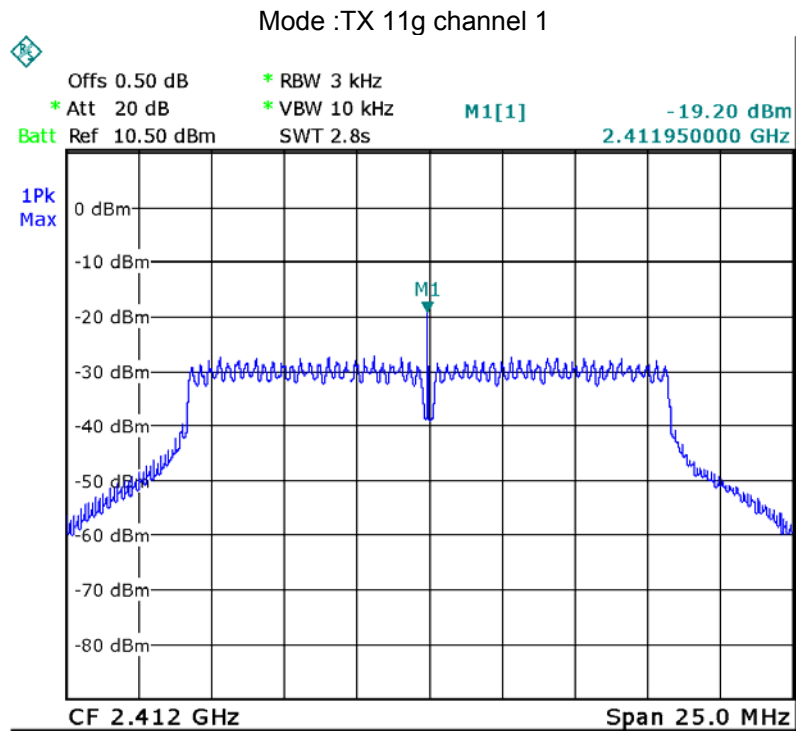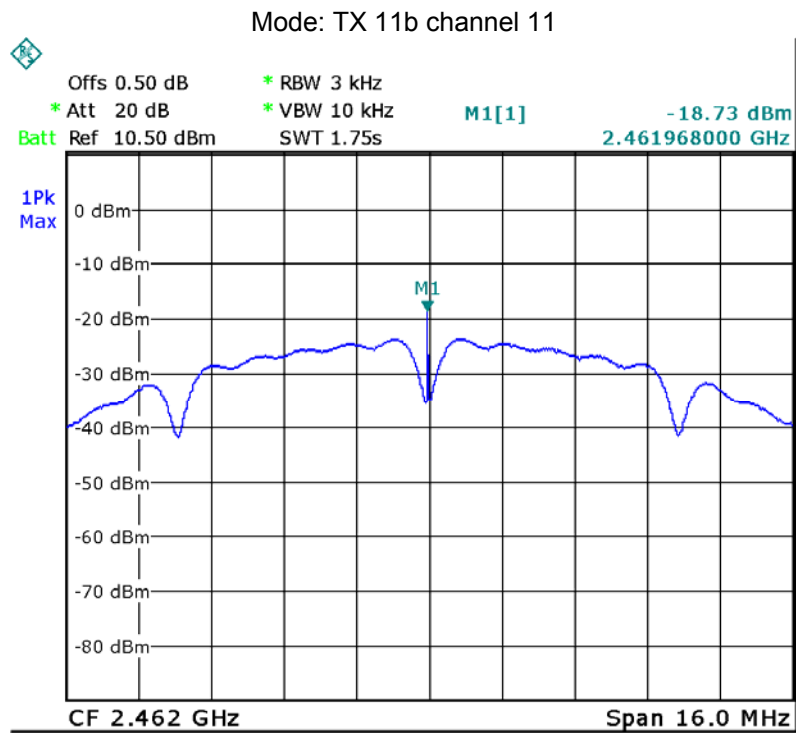


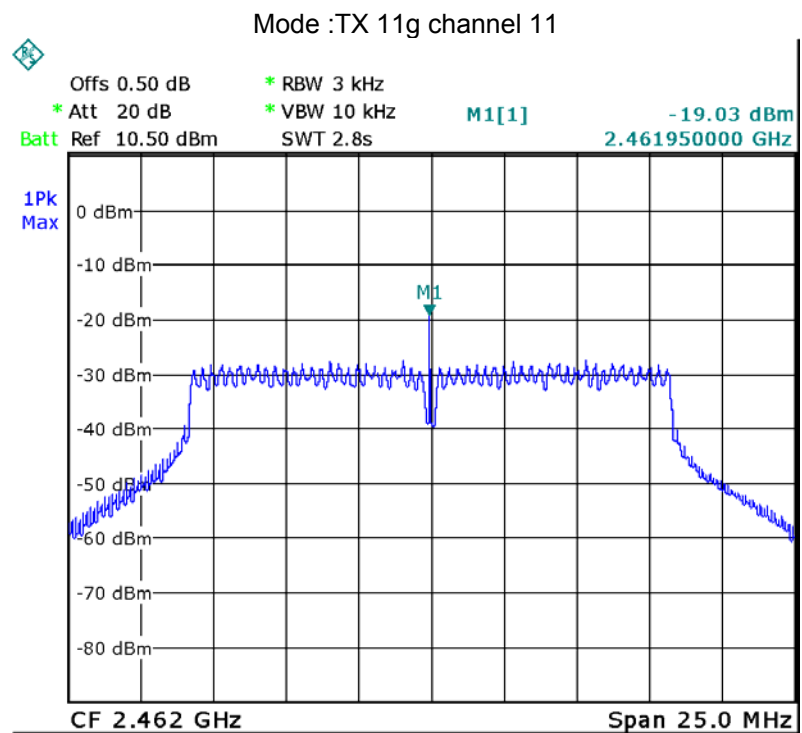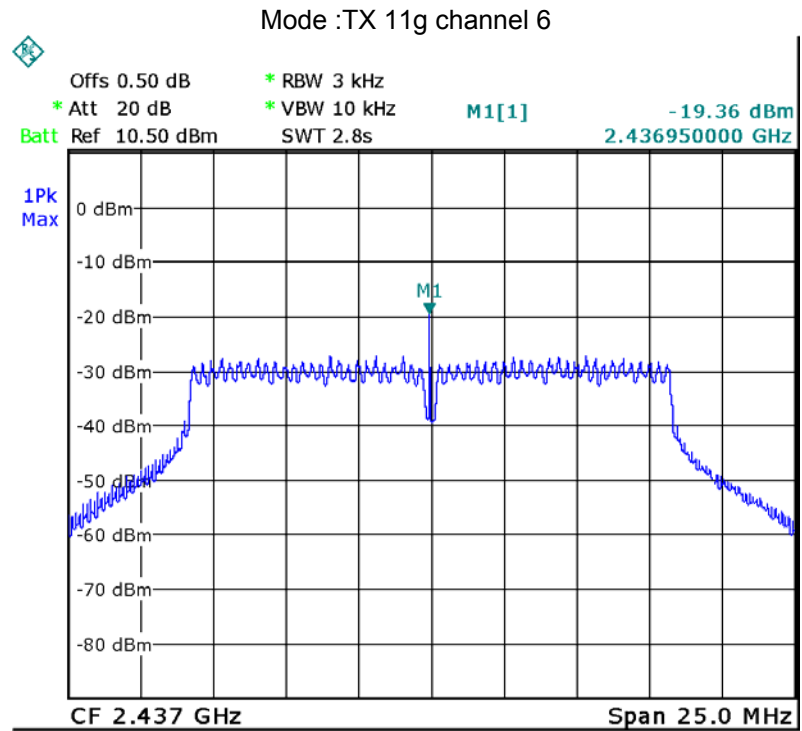


Mode: TX 11n HT20 channel 1

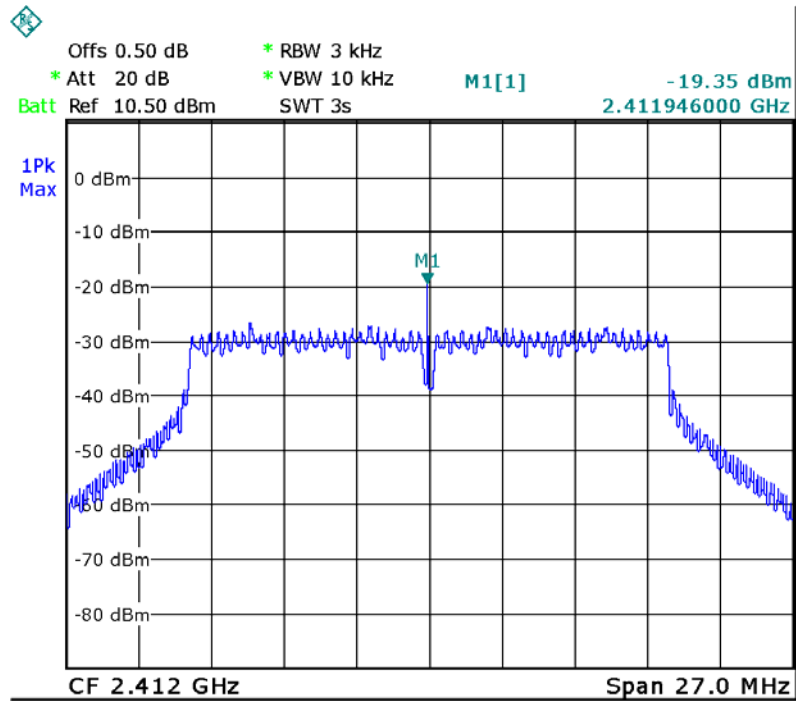


Mode: TX 11n HT20 channel 6

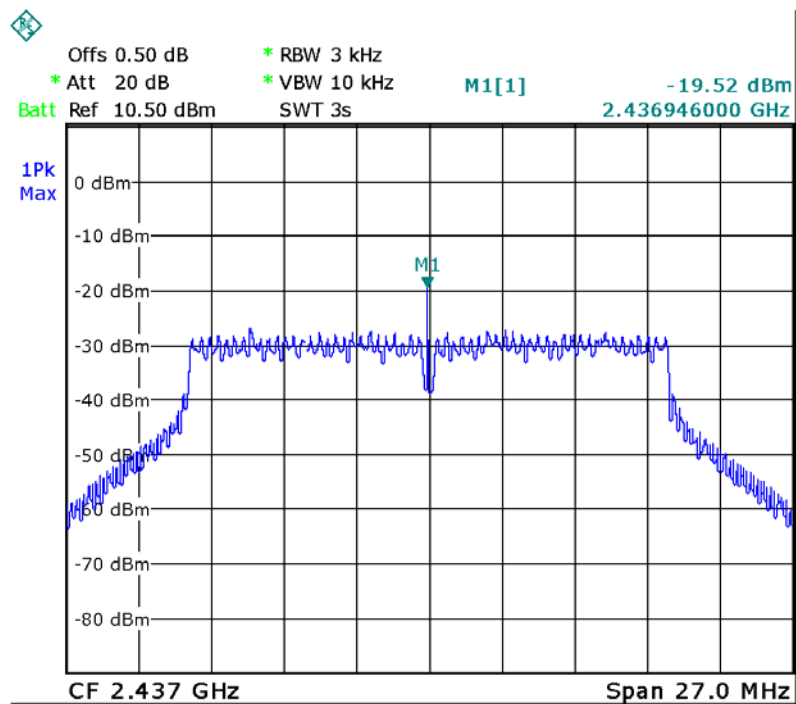


Mode: TX 11n HT20 channel 11

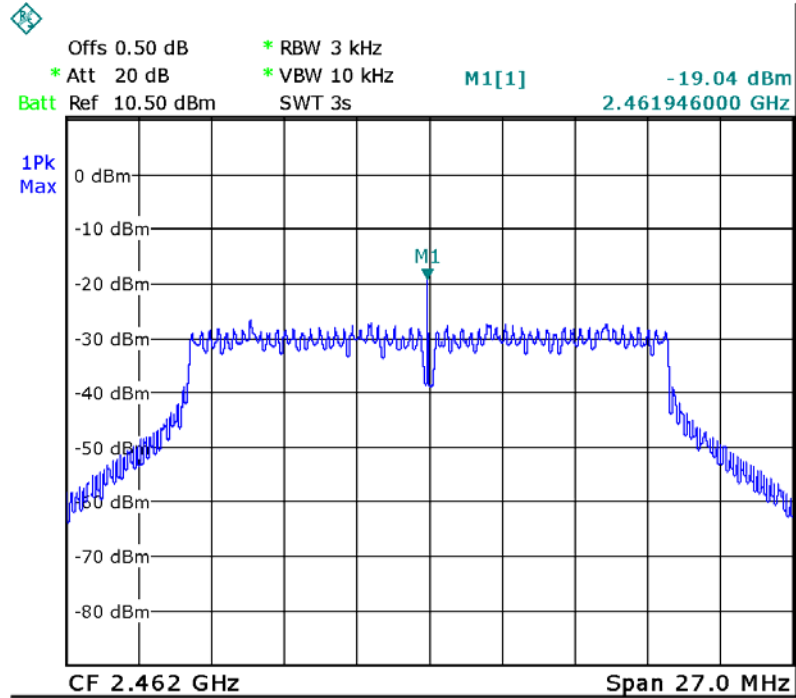


Mode: TX 11n HT40 channel 3

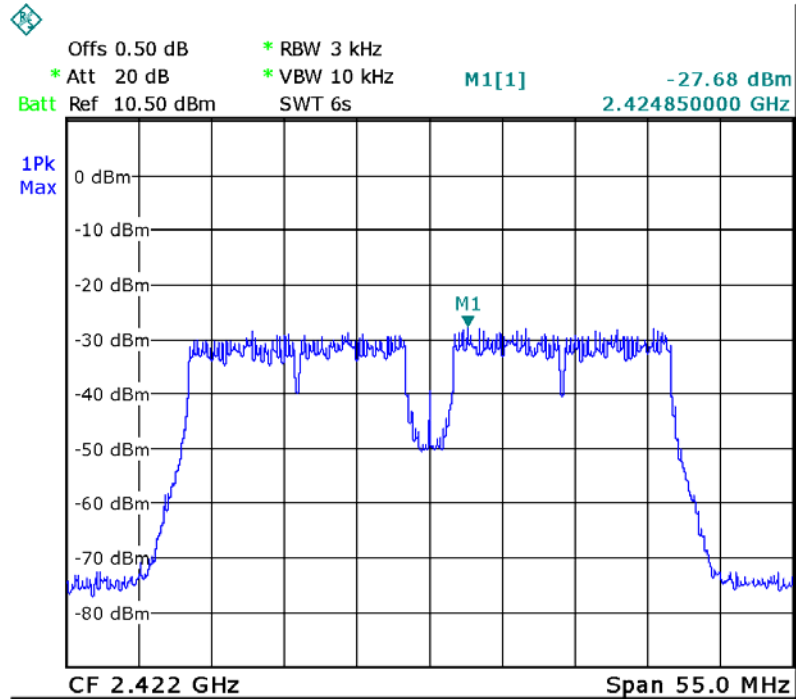

Mode: TX 11n HT40 channel 6

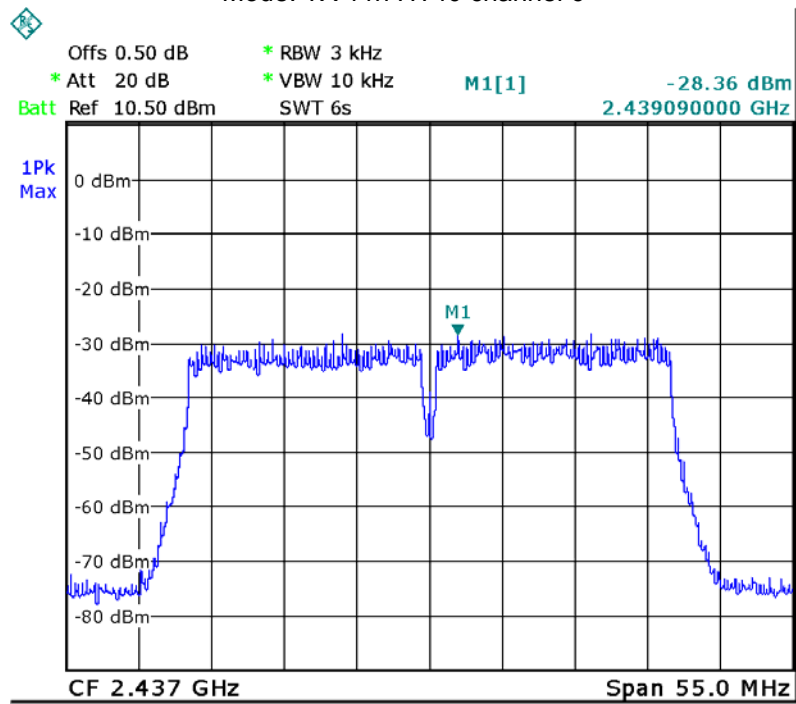

Mode: TX 11n HT40 channel 9

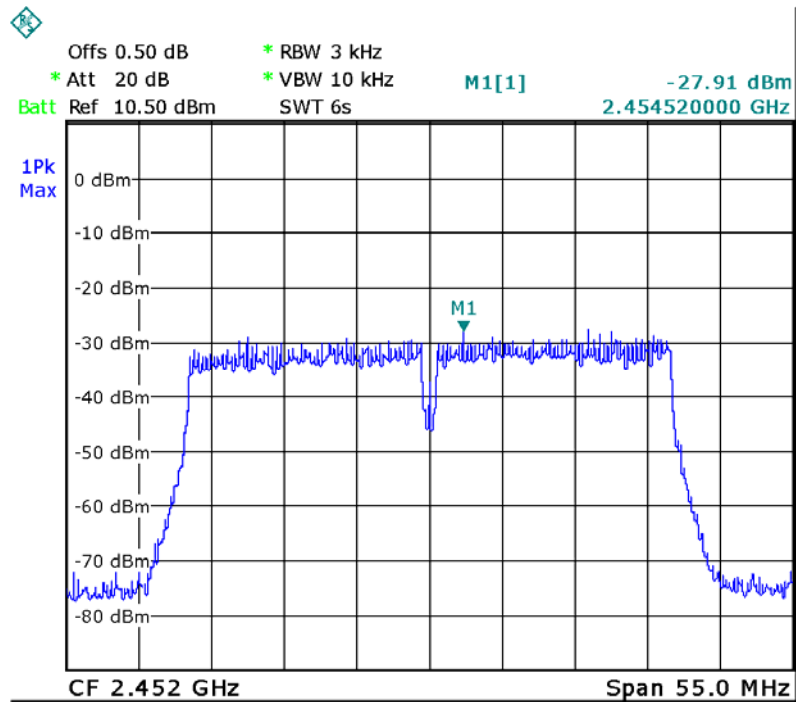

13 Antenna Requirement

According to the FCC Part 15 Paragraph 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. This product has a Internal integrated PCB printed Antenna fulfill the requirement of this section.

14 RF Exposure

Test Requirement: FCC Part 1.1307
 Evaluation Method: FCC Part 2.1091

14.1 Requirements

Systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy levels in excess limit for maximum permissible exposure. In accordance with 47 CFR FCC Part 2 Subpart J, section 2.1091 this device has been defined as a mobile device whereby a distance of 0.2 m normally can be maintained between the user and the device.

14.2 The procedures / limit

(A) Limits for Occupational / Controlled Exposure

Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/ cm ²)	Averaging Time E ² , H ² or S (minutes)
0.3-3.0	614	1.63	(100)*	6
3.0-30	1842 / f	4.89 / f	(900 / f)*	6
30-300	61.4	0.163	1.0	6
300-1500			F/300	6
1500-100,000			5	6

(B) Limits for General Population / Uncontrolled Exposure

Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/ cm ²)	Averaging Time E ² , H ² or S (minutes)
0.3-1.34	614	1.63	(100)*	30
1.34-30	824/f	2.19/f	(180/f)*	30
30-300	27.5	0.073	0.2	30
300-1500			F/1500	30
1500-100,000			1.0	30

Note: f = frequency in MHz ; *Plane-wave equivalent power density

14.3 MPE Calculation Method

$$S = \frac{P \times G}{4 \times \pi \times R^2}$$

S = power density (in appropriate units, e.g. mW/cm²)

P = output power to the antenna (in appropriate units, e.g., mW).

G = power gain of the antenna in the direction of interest relative to an isotropic radiator, the power gain factor, is normally numeric gain.

R = distance to the center of radiation of the antenna (appropriate units, e.g., cm)

From the peak EUT RF output power, the minimum mobile separation distance, R=20cm, as well as the gain of the used antenna, the RF power density can be obtained

Antenna Gain (dBi)	Antenna Gain (numeric)	Max. Peak Output Power (dBm)	Peak Output Power (mW)	Power Density (mW/cm ²)	Limit of Power Density (mW/cm ²)
0.00	1.000	9.58	9.08	0.001806	1

15 Photographs – Model EleCam 360 Test Setup

15.1 Photograph - Spurious Emissions Radiated Test Setup

From 30MHz-1000MHz



Above 1GHz



16 Photographs - Constructional Details

16.1 Model EleCam 360-External Photos

















16.2 Model EleCam 360– Internal Photos




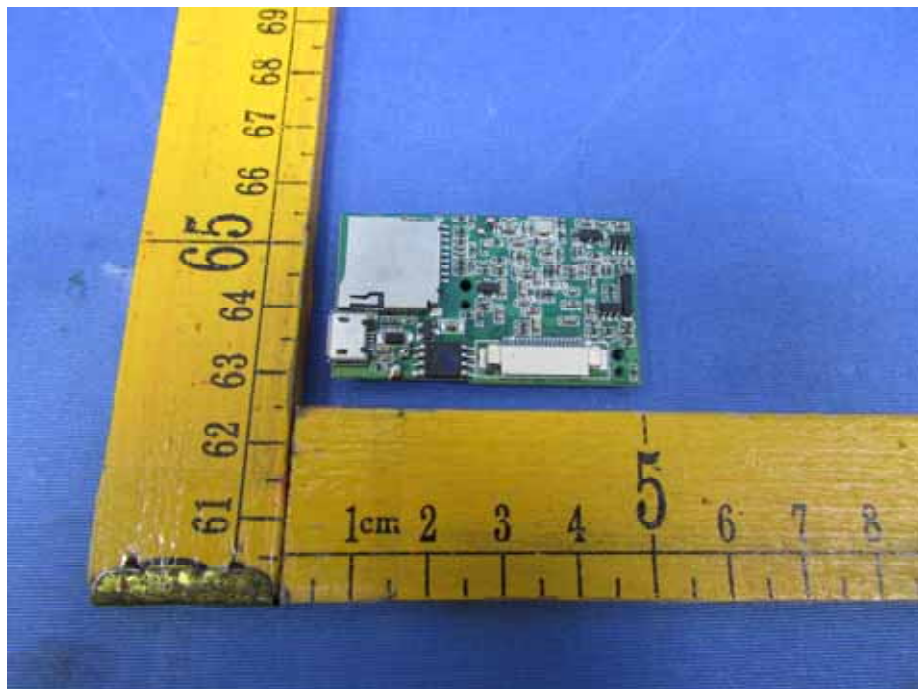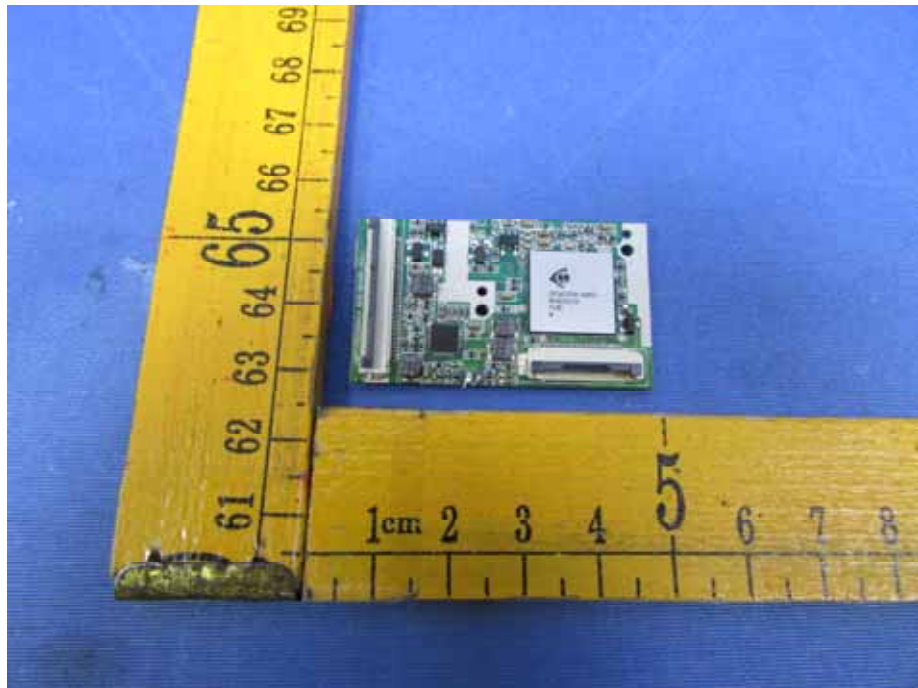

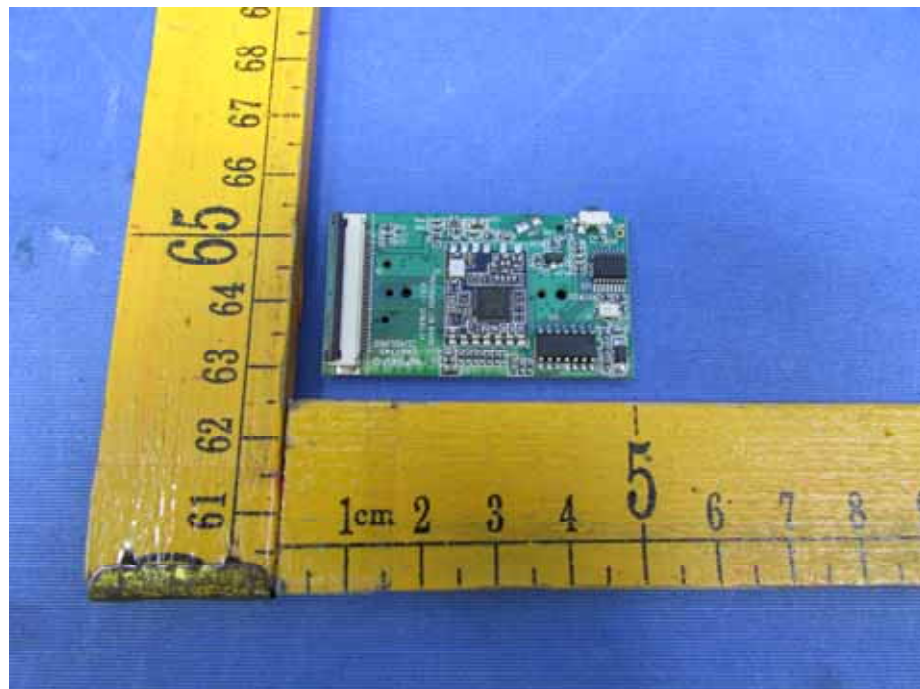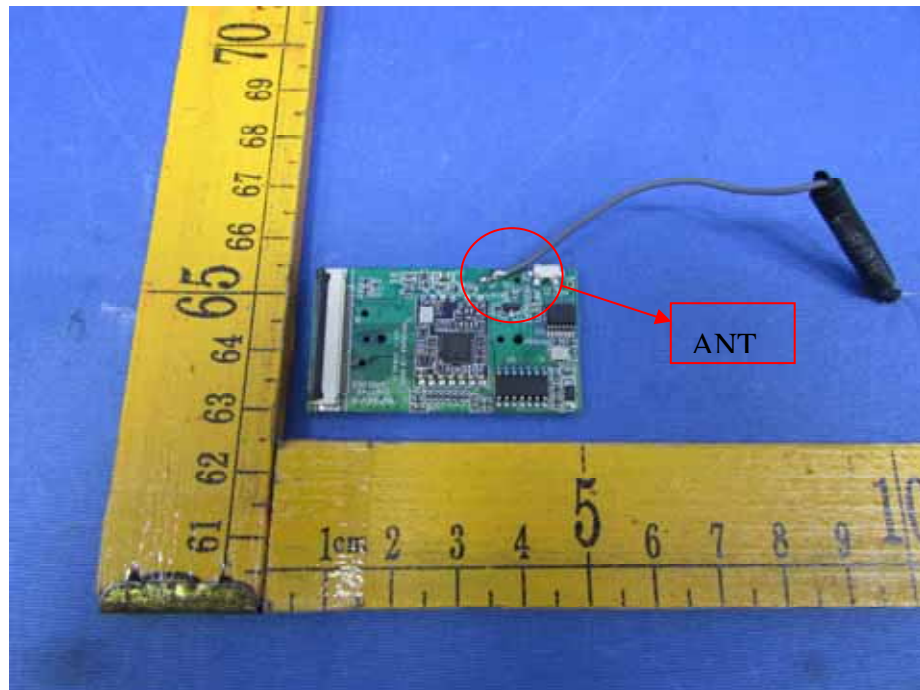

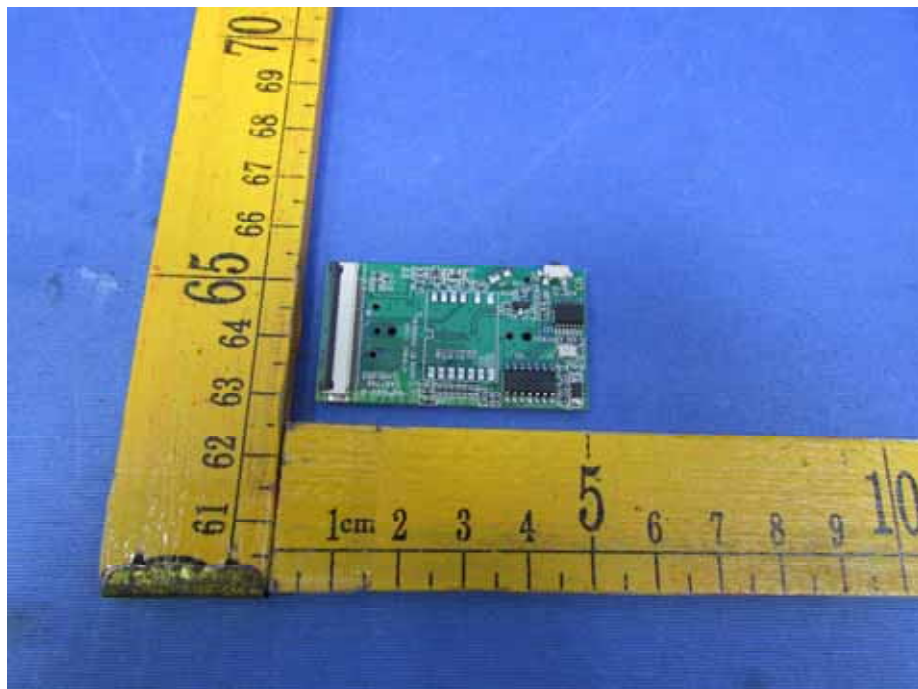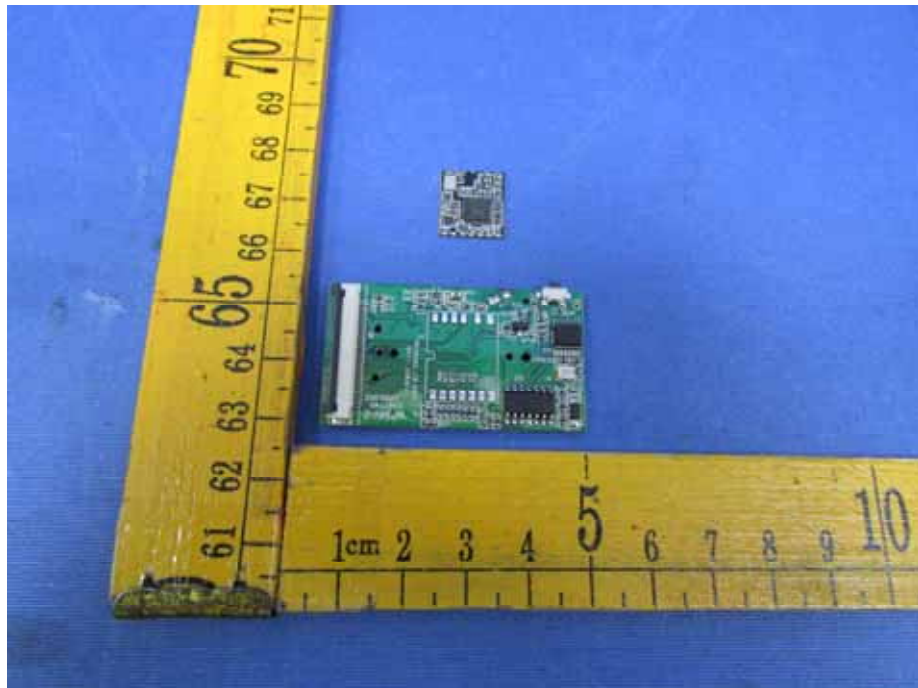

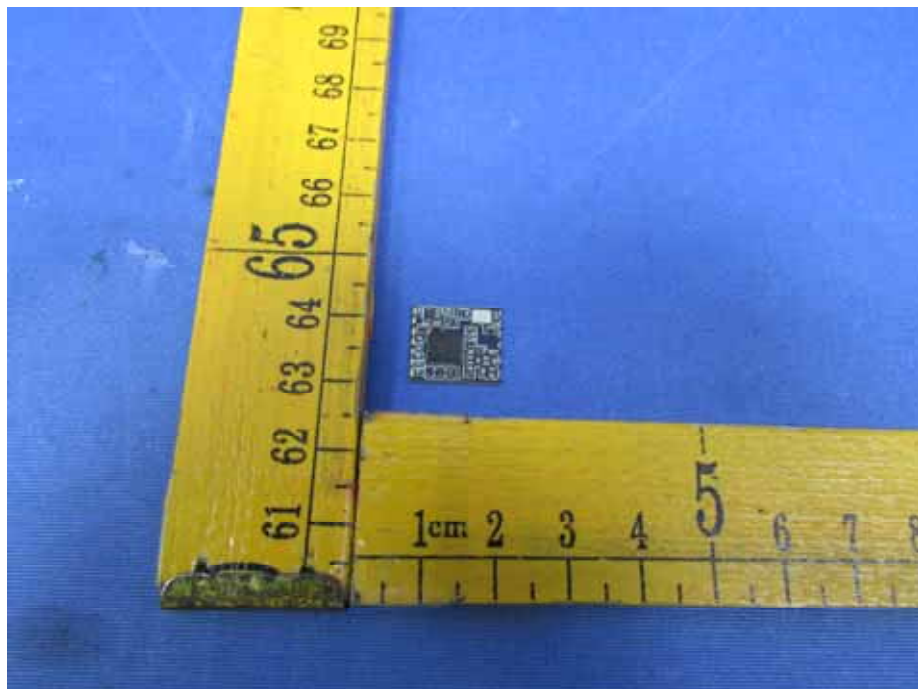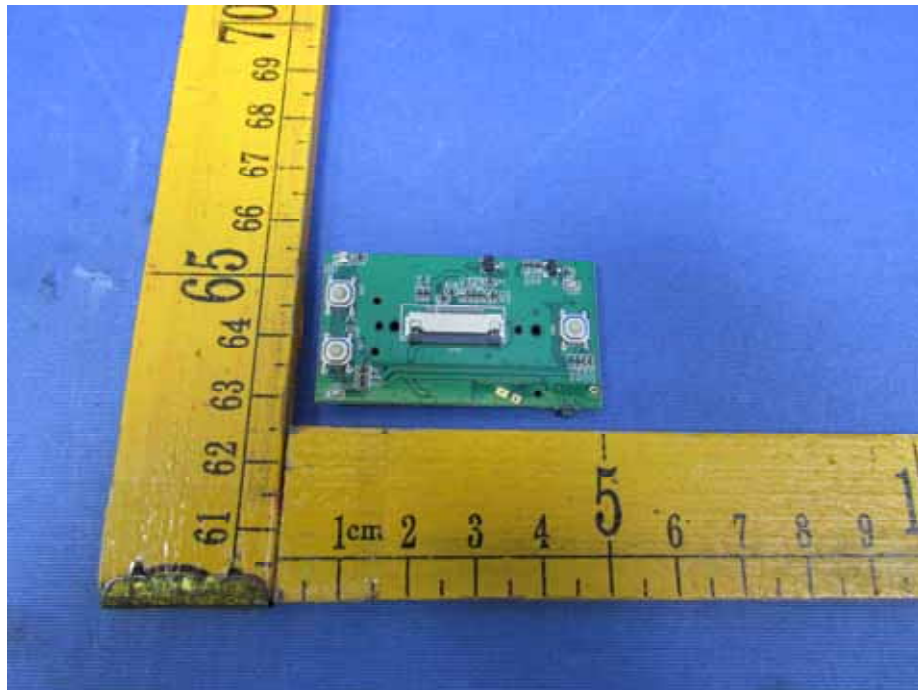

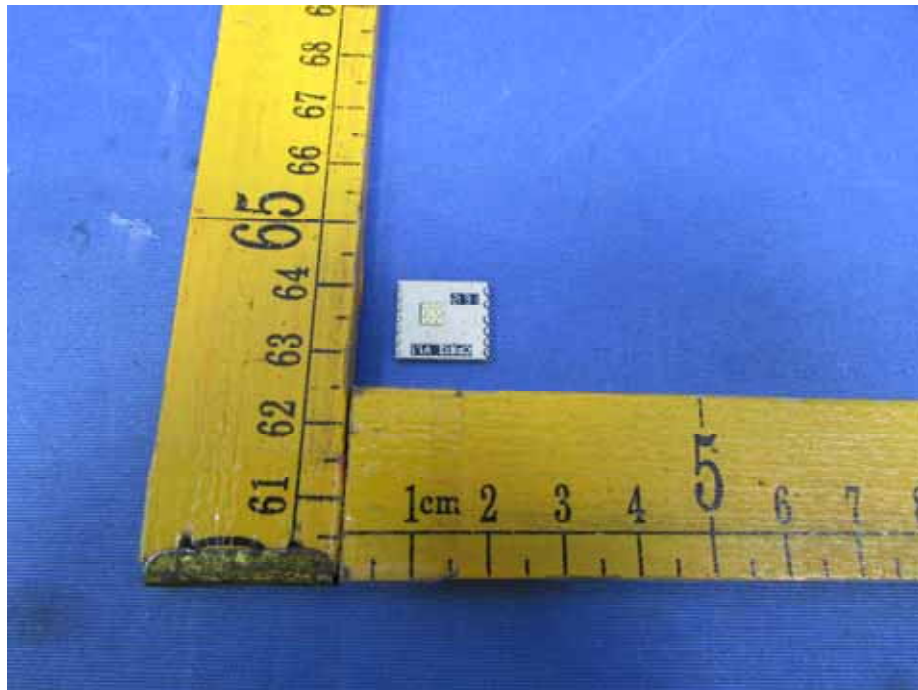



====End of Report====