

CTC advanced
member of RWTÜV group



BNetzA-CAB-02/21-102

TEST REPORT

Test Report No.: 1-8743/19-01-03_A



Deutsche
Akkreditierungsstelle
D-PL-12076-01-01

Testing Laboratory

CTC advanced GmbH

Untertürkheimer Straße 6 – 10

66117 Saarbrücken/Germany

Phone: + 49 681 5 98 - 0

Fax: + 49 681 5 98 - 9075

Internet: <http://ctcadvanced.com>

e-mail: mail@ctcadvanced.com

Accredited Testing Laboratory:

The testing laboratory (area of testing) is accredited according to DIN EN ISO/IEC 17025 (2005) by the Deutsche Akkreditierungsstelle GmbH (DAkkS)

The accreditation is valid for the scope of testing procedures as stated in the accreditation certificate with the registration number: D-PL-12076-01-05

Applicant

Flex

Via Ernesto Breda, 176

Milano, MI 20126 Italy

Phone: +39 02-8732 92 44

Fax: +39 02-8732 92 36

Contact: Francesca Conte

e-mail: francesca.conte@flex.com

Manufacturer

AMGEN INC.

One Amgen Center Drive, EIN -95-354077600

Thousand Oaks CA 91320 / United States of America

Test Standard/s

FCC - Title 47 CFR 2019-08
Part 15 B

FCC - Title 47 of the Code of Federal Regulations; Chapter I; Part 15 -
Radio frequency devices

ANSI C63.4 2014-06

American National Standard for Methods of Measurement of Radio-
Noise Emissions from Low-Voltage Electrical and Electronic Equipment
in the Range of 9 kHz to 40 GHz

For further applied test standards please refer to section 3 of this test report.

Test Item

Kind of test item:

needle-based auto-injector

Model name:

AutoTouch Wireless

S/N serial number:

W0119270474

HW hardware status:

see EUT list

SW software status:

see EUT list

Power Supply:

3 V battery powered



This test report is electronically signed and valid without handwritten signature. The public keys can be requested at the test laboratory to verify the electronic signatures.

Test Report authorised:

Test performed:

Jens Hennemann
Radio Communications & EMC

Hans-Joachim Wolsdorfer
Radio Communications & EMC

1 Table of contents

1	Table of contents	2
2	General information	3
2.1	Notes and disclaimer	3
2.2	Application details	4
3	Test standard/s:	4
4	Test Environment	4
5	Test Laboratories sub-contracted	4
6	Information about Test Conditions	5
6.1	Test Item	5
6.2	EUT: Type, S/N etc. and Short Descriptions Used in this Test Report	6
6.3	EUT Set-up(s)	6
6.4	EUT Operating Modes	6
7	Summary of Test Results	7
7.1	Emission	7
7.2	Measurement and Test Set-up	8
7.3	Measurement uncertainty	8
8	Detailed test results - Emission	9
8.1	Electromagnetic Radiated Emissions (Distance 10 m)	9
8.2	Electromagnetic Radiated Emissions (Distance 5 m)	15
9	Test equipment and ancillaries used for tests	21
10	Observations	22
Annex A	Photographs of the test set-up	23
Annex B	Photographs of the EUT	25
Annex C	Table of contents of the used standard	29
Annex D	Document history	29
Annex E	Further information	29

2 General information

2.1 Notes and disclaimer

The test results of this test report relate exclusively to the test item specified in this test report. CTC advanced GmbH does not assume responsibility for any conclusions and generalizations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item.

The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of CTC advanced GmbH.

The testing service provided by CTC advanced GmbH has been rendered under the current "General Terms and Conditions for CTC advanced GmbH".

CTC advanced GmbH will not be liable for any loss or damage resulting from false, inaccurate, inappropriate or incomplete product information provided by the customer.

Under no circumstances does the CTC advanced GmbH test report include any endorsement or warranty regarding the functionality, quality or performance of any other product or service provided.

Under no circumstances does the CTC advanced GmbH test report include or imply any product or service warranties from CTC advanced GmbH, including, without limitation, any implied warranties of merchantability, fitness for purpose, or non-infringement, all of which are expressly disclaimed by CTC advanced GmbH.

All rights and remedies regarding vendor's products and services for which CTC advanced GmbH has prepared this test report shall be provided by the party offering such products or services and not by CTC advanced GmbH. In no case this test report can be considered as a Letter of Approval.

The present test report can only be used for the sDOC procedure in the USA if the „Responsible Party” (located in USA) or an official of the responsible party confirms the report in writing, as designated in FCC§2.938.

This test report is electronically signed and valid without handwritten signature. For verification of the electronical signatures, the public keys can be requested at the testing laboratory.

This test report replaces the test report with the number 1-8743/19-01-03 and dated 2019-10-09

2.2 Application details

Date of receipt of order: 2019-07-29
Date of receipt of test item: 2019-08-09
Start of test: 2019-08-20
End of test: 2019-08-20
Person(s) present during the test: Mrs Francesca Conte
Mr Carlo Caru

3 Test standard/s:

Test Standard	Version	Test Standard Description
FCC - Title 47 CFR Part 15 B	2019-08	FCC - Title 47 of the Code of Federal Regulations; Chapter I; Part 15 - Radio frequency devices
ANSI C63.4	2014-06	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz
ICES-003, Issue 6	2017-04	Interference-Causing Equipment Standard Digital Apparatus

4 Test Environment

Temperature: 20°C – 25°C
Relative humidity content: 30 % - 50 %
Air pressure: 1020 hPa
Power supply: 230 V / 50 Hz

5 Test Laboratories sub-contracted

6 Information about Test Conditions

6.1 Test Item

Kind of test item :	needle-based auto-injector								
Type identification :	AutoTouch Wireless								
Equipment classification:	Equipment for portable use								
Environment classification:	Residential, commercial and light industry								
Supply voltage :	battery powered 3 V (not replace- or rechargeable battery)								
Ports :	<table border="1"><thead><tr><th>Description</th><th>Direction</th><th>Length</th></tr></thead><tbody><tr><td>no ports available</td><td></td><td></td></tr></tbody></table>			Description	Direction	Length	no ports available		
Description	Direction	Length							
no ports available									
Is mounting position / usual operating position defined?	hand held								
Additional information:									
<ul style="list-style-type: none">- this is a class B digital device: the instructions furnished the user shall include a statement according to §15.105 of the used FCC rules- the build in radio module is not part of this test report and already tested									

6.2 EUT: Type, S/N etc. and Short Descriptions Used in this Test Report

short description*)	EUT	Type	S/N serial number	HW hardware status	SW software status
EUT A	needle-based auto-injector	AutoTouch Wireless	W0119270474	AMG00044070 -100-BOM AT WRL Bill of Material Rev. C	FW: 1.0.3

*) EUT short description is used to simplify the identification of the EUT in this test report.

6.3 EUT Set-up(s)

EUT set-up no.*)	Combination of EUT and AE	Remarks
set. 1	EUT A	- / -

*) EUT set-up no. is used to simplify the identification of the EUT set-up in this test report.

6.4 EUT Operating Modes

EUT operating mode no.*)	Description of operating modes	Additional information
op. 1	EDS motor in continuous movement	BLE idle

*) EUT operating mode no. is used to simplify the test report.

7 Summary of Test Results

No deviations from the technical specifications were ascertained
 There were deviations from the technical specifications ascertained

7.1 Emission

7.1.1 Enclosure

EMI Phenomenon	Frequency range	Basic standard	Result
Radiated Interference Field Strength	30 - 1000 MHz	FCC Part 15 Class B	passed
Radiated Interference Field Strength	> 1 GHz	FCC Part 15 Class B	passed

7.1.2 AC Mains Power Input/Output Ports

EMI Phenomenon	Frequency range	Basic standard	Result
Conducted interference voltage	0,15– 30 MHz	FCC Part 15 Class B	NA2

Remarks:

NA1	Not tested because not required by used standard
NA2	Test not applicable because port does not exists
NA3	Test not applicable because port only for services
NA4	Test not applicable because port lengths not longer than 3m
NA5	Not tested because not required by customer
NA6	Not tested because used frequency < 108 MHz
NA7	Not tested because the device is for vehicular use

7.2 Measurement and Test Set-up

Note: The test configuration is in accordance with the requirements given in the standards in point 3

7.3 Measurement uncertainty

The uncertainty of the measurement equipment fulfils CISPR 16 and the related European and national standards.

The semi anechoic chamber fulfils the requirements of CISPR 16-1 (ANSI C63.4) for a test volume of 4m Ø.

The table below shows the measurement uncertainties for each measurement method. The expended uncertainty (k=2 or 95%) was calculated with worst case values.

Measurement Method	Frequency area Impulse duration time	Description	Expanded uncertainty (k=2 or 95%)
Radiated Emission FCC part 15 B, ANSI C63.4	30 MHz – 18 GHz	- / -	± 4.28 dB
Conducted Emission FCC part 15 B, ANSI C63.4	9 kHz – 30 MHz	- / -	± 3.49 dB

8 Detailed test results - Emission

8.1 Electromagnetic Radiated Emissions (Distance 10 m)

8.1.1 Instrumentation for Test (see equipment list)

F 1	F 2	F 4b	F 5	F 6	F 7	F 8						
-----	-----	------	-----	-----	-----	-----	--	--	--	--	--	--

8.1.2 Test Plan

EUT set-up	set. 1		
Operating mode	Application	Limit	Result
op. 1	Enclosure	FCC part 15 B Class B	passed

Remarks: battery powered 3 V

8.1.3 Radiated Limits

Frequency- range	FCC part 15 B Class B	FCC part 15 B Class A
30 MHz – 88 MHz	30 dB μ V/m	39,1 dB μ V/m
88 MHz – 216 MHz	33,5 dB μ V/m	43,5 dB μ V/m
216 MHz – 960 MHz	36 dB μ V/m	46,4 dB μ V/m
above 960 MHz	44 dB μ V/m	49,5 dB μ V/m
	* This values are recalculated from the class B limits at 3 m antenna distance in §15.109 (g 2) of the FCC rules	.

8.1.4 Calibration Information


Device	Serial number	Internal Number	Calibration valid until	Calibration interval
ESR 3	1316.3003K03-102587-ct	- / -	05/2020	12 month
Trilog Antenna	9163-371	300003854	11/2019	24 month

Remarks:
System check of all relevant devices and the chamber (weekly)

8.1.5 Test Results

Common Information

EUT: AutoTouch Wireless
 Serial number: W0119270474
 Test description: FCC part 15 B class B @ 10 m
 Operating condition: EDS motor in continuous movement
 Operator name: Hennemann
 Comment: battery powered

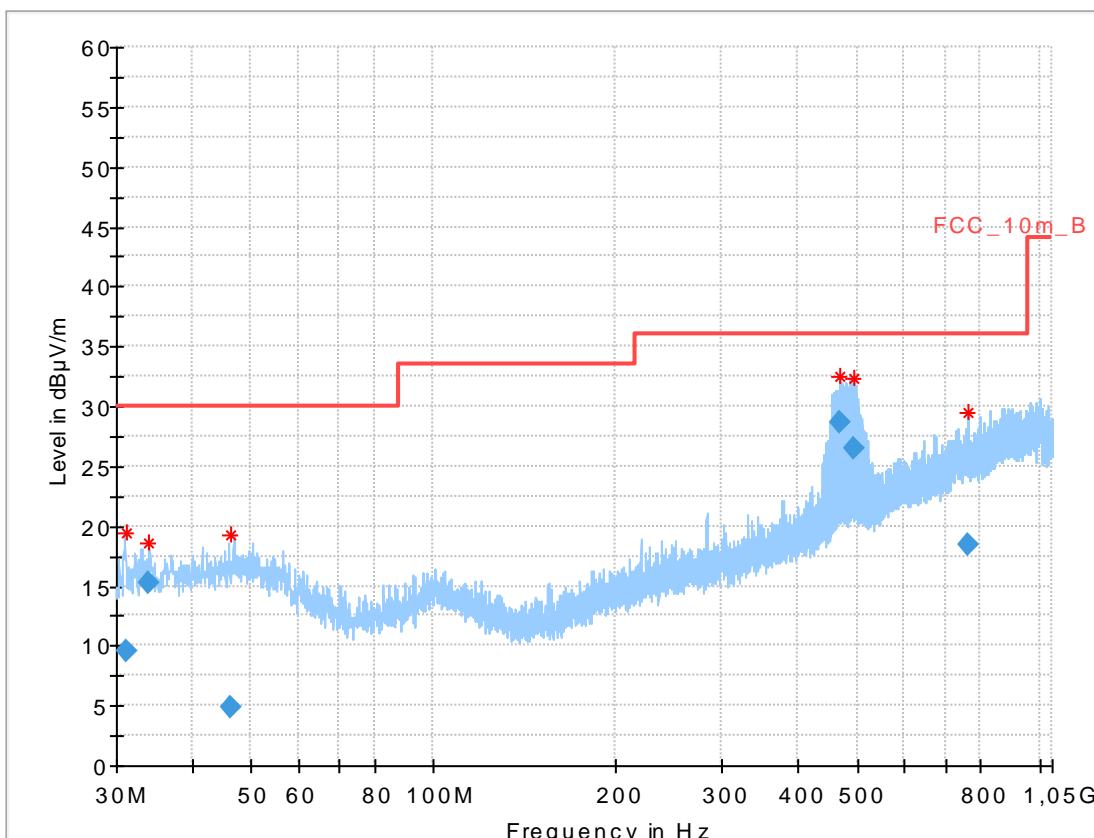

Final Result

Frequency (MHz)	QuasiPeak (dB μ V/m)	Limit (dB μ V/m)	MARGIN (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
31.250	9.52	30.0	20.48	1000	120	143.0	H	135.0	13
33.983	15.29	30.0	14.71	1000	120	340.0	H	292.0	14
46.342	4.93	30.0	25.07	1000	120	144.0	H	13.0	15
469.376	28.73	36.0	7.27	1000	120	293.0	V	50.0	18
495.059	26.53	36.0	9.47	1000	120	244.0	V	282.0	18
761.703	18.50	36.0	17.50	1000	120	200.0	V	183.0	22

8.1.6 Hardware Set-up

Subrange 1**Frequency Range:**

30 MHz - 2 GHz

Receiver:ESR 3 [ESR 3]
@ GPIB0 (ADR 20), SN 1316.3003K03/102587, FW 3.46 SP1,
LAST CAL 29.06.2019, CAL EXP 30.05.2020**Signal Path:**

without Notch

FW 1.0

Antenna:

VULB 9163

SN 9163-295, FW ---

Correction Table (vertical): VULP9163_3m_2016

Correction Table (horizontal): VULP9163_3m_2016

Correction Table (vertical): Cable_EN_1GHz (1005)

Correction Table (horizontal): Cable_EN_1GHz (1005)

Antenna Tower:

Tower [EMCO 2090 Antenna Tower]

@ GPIB0 (ADR 8), FW REV 3.12

Turntable:

Turntable [EMCO Turntable]

@ GPIB0 (ADR 9), FW REV 3.12

Software version:

EMC32 V10.40.10

8.1.7 Sequence of testing

Setup

- The equipment is set up to simulate normal operation mode as described in the user manual or defined by the manufacturer.
- If the EUT is a tabletop system, a nonconducting table with 0.8 m height is used, which is placed on the ground plane.
- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.
- Auxiliary equipment and cables are positioned to simulate normal operation conditions as described in ANSI C 63.4.
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- Measurement distance is 10 m or 3 m (see ANSI C 63.4) – see test details.
- EUT is set into operation.

Premasurement

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna is polarized vertical and horizontal.
- The antenna height changes from 1 m to 3 m.
- At each turntable position, antenna polarization and height the analyzer sweeps three times in peak to find the maximum of all emissions.

Final measurement

- The final measurement is performed for at least six highest peaks according to the requirements of the ANSI C63.4.
- Based on antenna and turntable positions at which the peak values are measured the software maximize the peaks by changing turntable position $\pm 45^\circ$ and antenna height between 1 and 4 m.
- The final measurement is done with quasi-peak detector (as described in ANSI C 63.4).
- Final levels, frequency, measuring time, bandwidth, antenna height, antenna polarization, turntable angle, correction factor, margin to the limit and limit are recorded. A plot with the graph of the premeasurement with marked maximum final results and the limit is stored.

8.1.8 Signal strength calculation

Calculation formula:

$$SS = U_R + CL + AF$$

List of abbreviations:

SS	►	signal strength
U_R	►	voltage at the receiver
CL	►	loss of the cable
AF	►	antenna factor

List with correction factors:


Frequency [MHz]	CL [dB]	AF [1/m]
30,000	0,20	12,30
100,000	0,60	11,30
200,000	1,10	10,60
300,000	1,30	13,20
400,000	1,60	15,30
500,000	1,90	16,80
600,000	2,00	18,80
700,000	2,20	20,30
800,000	2,30	21,50
900,000	2,40	22,80
1000,000	2,50	23,30

Example calculation:

For example at 500,000 000 MHz the measured Voltage (U_R) is 12,35 dB μ V, the loss of the cable (CL) is 1,90 dB and the antenna factor (AF) is 16,80 dB (m $^{-1}$) the final result will be calculated:

$$SS [\text{dB}\mu\text{V}/\text{m}] = 12,35 [\text{dB}\mu\text{V}] + 1,90 [\text{dB}] + 16,80 [\text{dB} (\text{m}^{-1})] = \underline{31,05 [\text{dB}\mu\text{V}/\text{m}]} (35,69 \mu\text{V}/\text{m})$$

8.1.9 Test Set-up

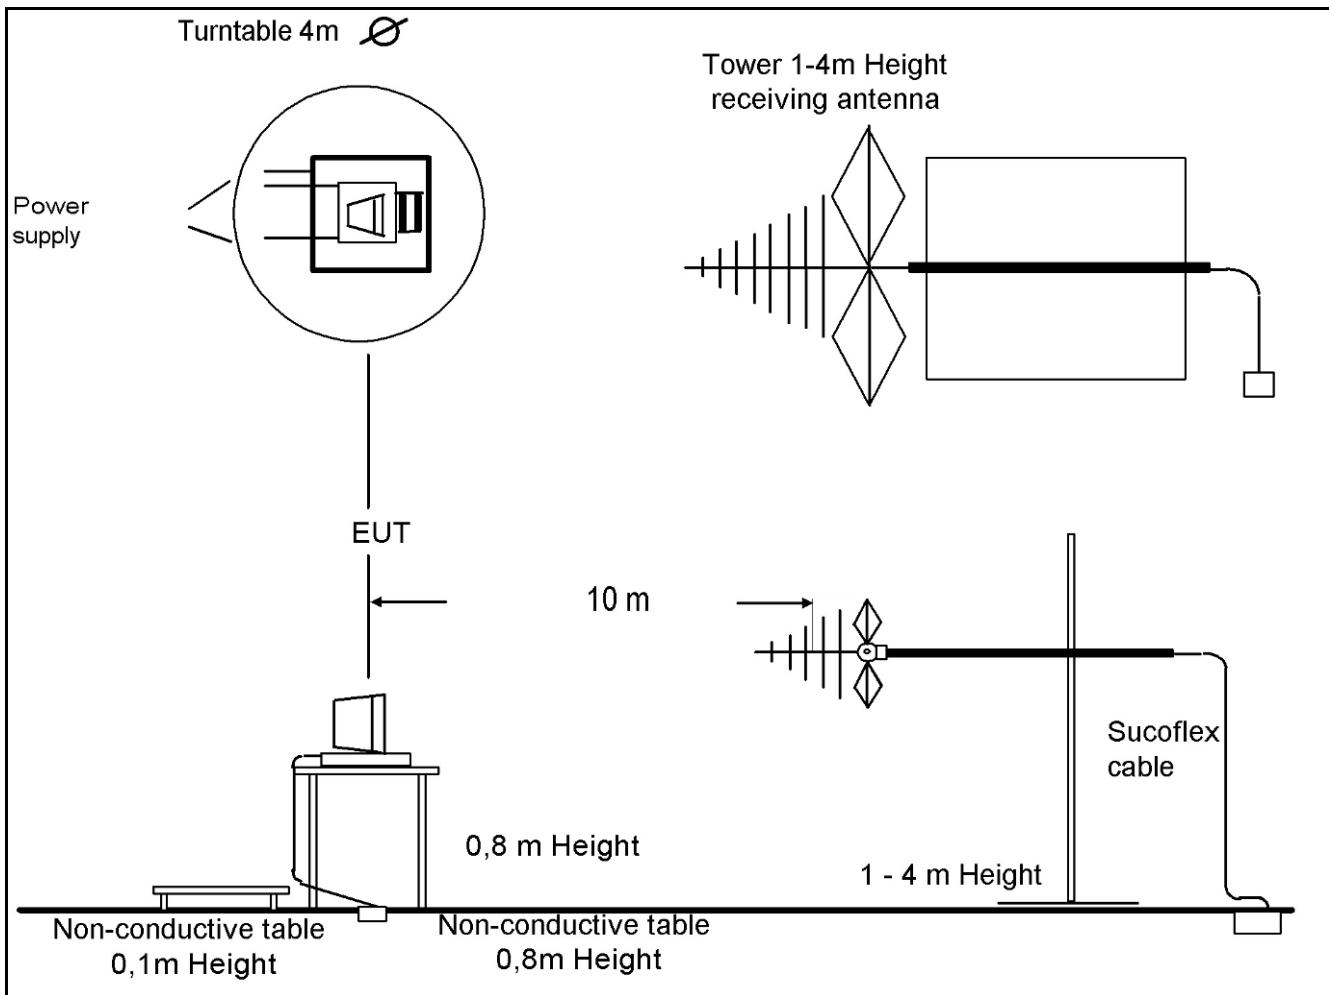

8.2 Electromagnetic Radiated Emissions (Distance 5 m)

8.2.1 Instrumentation for Test (see equipment list)

F 1	F 6	F 29	F 30	F 33							
-----	-----	------	------	------	--	--	--	--	--	--	--

8.2.2 Test Plan

EUT set-up	set. 1		
Operating mode	Application	Limit	Result
op. 1	Enclosure	FCC part 15 B Class B	passed

Remarks:	The measured values are recalculated from 5m to 3m distance battery powered 3 V
----------	--

8.2.3 Radiated Limits

Frequency- range above 1GHz	47CFR15: (FCC part 15 B) Class B	47CFR15: (FCC part 15 B) Class A *
	54 dB μ V/m	59,5 dB μ V/m
	* These values are recalculated from the class A limits at 10 m antenna distance in §15.109 (g 2) of the FCC rules.	


8.2.4 Calibration Information

Device	Serial number	Internal Number	Calibration valid until	Calibration interval
FSU 26	200809	300003874	12/2019	12 month
Horn Antenna	9120B188	300003896	04/2020	24 month
Remarks:		System check of all relevant devices and the chamber (weekly)		

8.2.5 Test Results

Common Information

EUT: AutoTouch Wireless
Serial number: W0119270474
Test description: FCC part 15 B class B
Operating condition: EDS motor in continuous movement
Operator name: Hennemann
Comment: battery powered

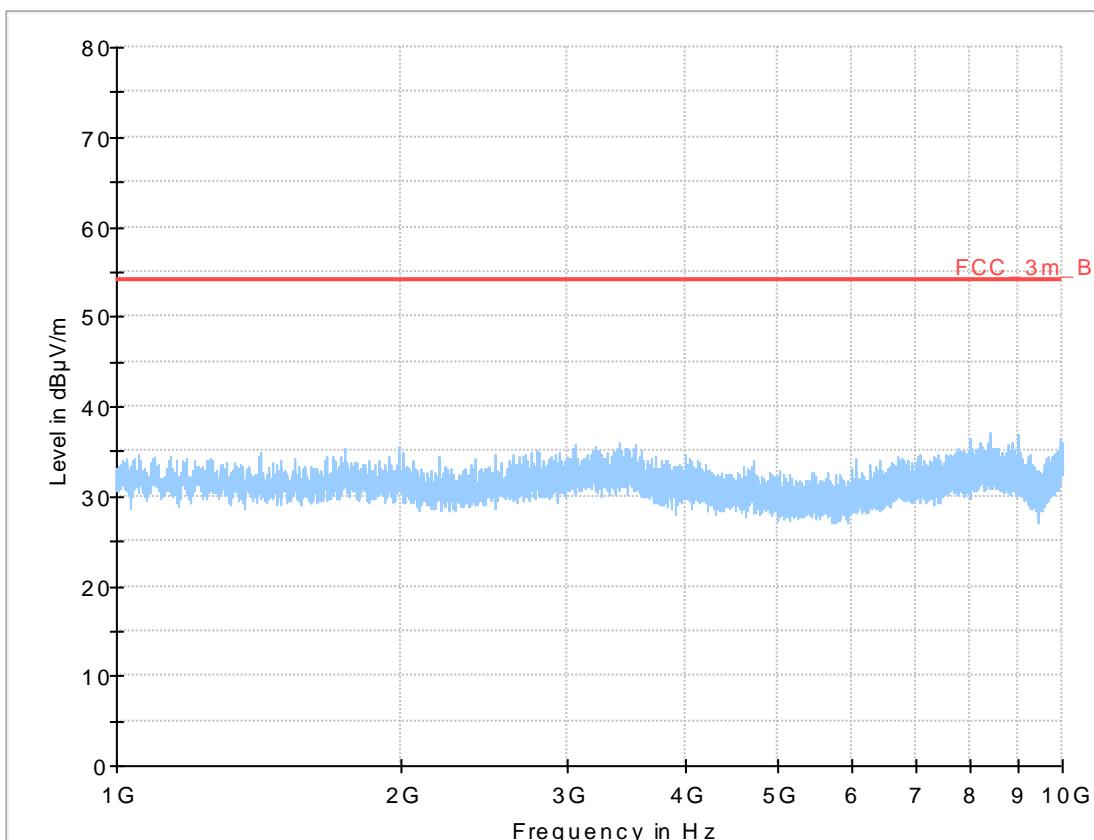

8.2.6 Hardware Set-up

Subrange 1

Frequency Range:

1 GHz - 10 GHz

Receiver:FSU 26 [FSU 26]
@ GPIB0 (ADR 17), SN 200809/026, FW 4.71**Signal Path:**1_6_EN
FW 1.0
Correction Table: LNA_EN (matix)
Correction Table: 3_5m**Antenna:**BBHA 9120 B
Correction Table (vertical): BBHA9120
Correction Table (horizontal): BBHA9120
Correction Table (vertical): Cable_Horn_EN (1103)
Correction Table (horizontal): Cable_Horn_EN (1103)**Antenna Tower:**

Manual [--]

Turntable:Turntable [EMCO Turntable]
@ GPIB0 (ADR 9), FW REV 3.12**Software version:**

EMC32 V10.40.10

8.2.7 Sequence of testing

Setup

- The Equipment was setup to simulate a typical usage like described in the user manual / or described by manufacturer.
- If the EUT is a tabletop system, a nonconducting table with 0,8 m height is used, which is placed on the ground plane.
- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions as described in ANSI C 63.4.
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is: (see ANSI C 63.4)
< 18 GHz = 3 m
18-26 GHz = 1,5 m
26-40 GHz = 0,75 m
- The EUT was set into operation.

Premasurement

- The turntable rotates continuous from 0° to 360°
- The antenna is polarized vertical and horizontal.
- In accordance to the antenna beam and the size of the EUT the antenna height changes in 30 cm steps, start at 1 meter. If it is not possible to tilt the emissions will be checked with a manually tilted antenna from top side.
- The analyzer scans quickly to find the maximum emissions of the EUT

Final measurement

- The final measurement will be performed with minimum the six highest peaks (depends on emissions and number of measured points below 1 GHz)
- According to the maximum antenna and turntable positions of premeasurement the software maximize the peaks by changing turntable position ($\pm 45^\circ$) and antenna movement between 1 and 4 meter.
- The final measurement will be done with AV (Average / see ANSI C 63.4) detector
- The final levels, frequency, measuring time, bandwidth, antenna height, antenna polarization, turntable angle, correction factor, margin to the limit, and limit will be recorded. Also a plot with the graph of the premeasurement with marked maximum final measurements and the limit will be stored.

8.2.8 Signal strength calculation

Calculation formula:

$$SS = U_R + CL + AF + PA + DC$$

List of abbreviations:

SS	►	signal strength
U _R	►	voltage at the receiver
CL	►	loss of the cable and gain of the preamp
AF	►	antenna factor
DC	►	distance correction (results measured on 5 m calculated to 3 m)

List with correction factors: column CL in table contains cable factor and preamplifier correction

Frequency [GHz]	CL [dB]	AF [dB1/m]	DC [dB]
1,000	-35,50	26,20	4,40
1,500	-35,20	26,10	4,40
2,000	-35,10	26,70	4,40
2,500	-35,00	26,50	4,40
3,000	-34,70	27,60	4,40
3,500	-34,80	28,40	4,40
4,000	-35,00	28,60	4,40
4,500	-34,90	28,90	4,40
5,000	-34,80	29,30	4,40
5,500	-34,35	29,80	4,40
6,000	-34,00	30,30	4,40
6,500	-33,50	31,20	4,40
7,000	-33,10	31,20	4,40
7,500	-33,40	31,70	4,40
8,000	-33,80	32,10	4,40
8,500	-33,75	32,30	4,40
9,000	-33,70	31,70	4,40
9,500	-33,50	29,40	4,40
10,000	-33,40	33,00	4,40


Example calculation:

For example at 4,000 000 000 GHz the measured Voltage (U_R) is 46,13 dB μ V, the loss of the cable (CL) is -35,00 dB, the antenna factor (AF) is 28,60 dB(m⁻¹) and the distance correction (DC) is 4,40 dB the final result will be calculated:

$$SS [\text{dB}\mu\text{V}/\text{m}] = 46,13 [\text{dB}\mu\text{V}] + (-35,00) [\text{dB}] + 28,60 [\text{dB}(\text{m}^{-1})] + 4,4 [\text{dB}] = \underline{44,13 [\text{dB}\mu\text{V}/\text{m}]} (160,88 \mu\text{V}/\text{m})$$

8.2.9 Test Set-up

- Turntable 4m Ø

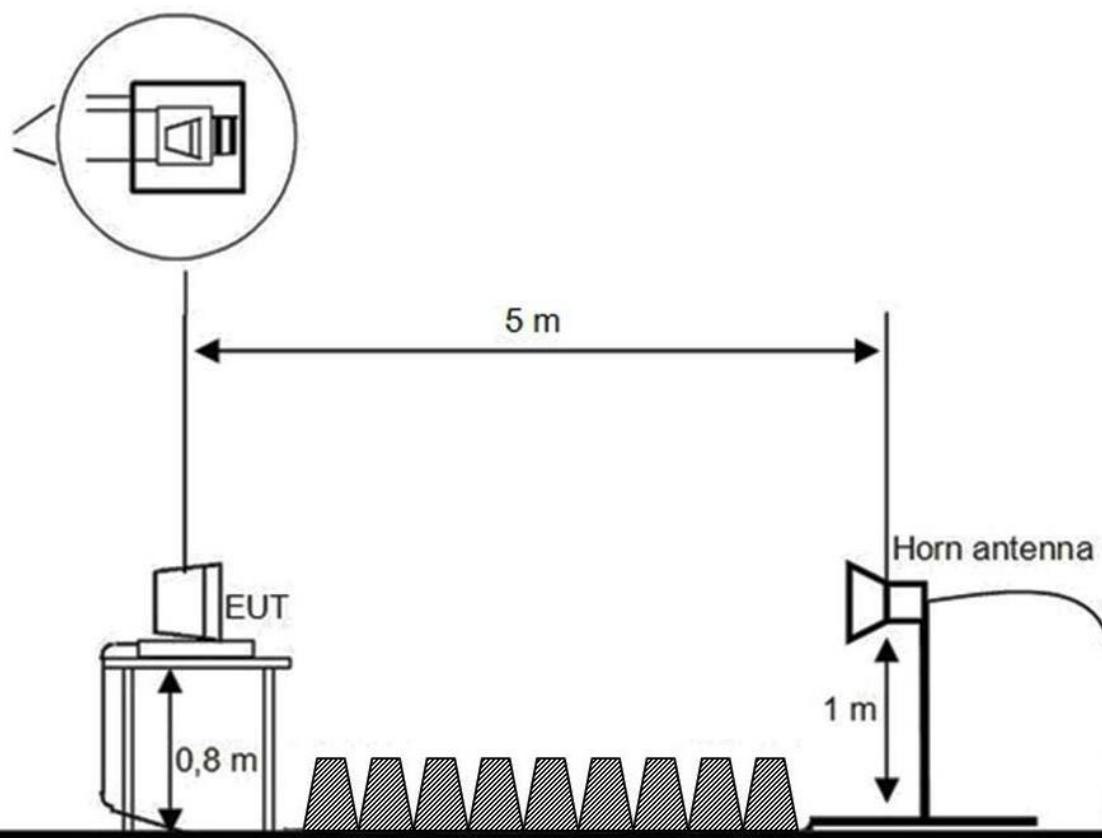

9 Test equipment and ancillaries used for tests

To simplify the identification of the test equipment and/or ancillaries which were used, the reporting of the relevant test cases only refer to the test item number as specified in the table below.

No.	Instrument/Ancillary	Manufacturer	Type	Serial-No.	Internal identification
Radiated emission in chamber F					
F-1	Control Computer	F+W		2934939v001	300005258
F-2	Trilog-Antenna	Schwarzbeck	VULB 9163	9163-371	300003854
F-3a	Amplifier	Veritech Microwave Inc.	0518C-138	- / -	- / -
F-4b	Switch	Netgear	GS108P	26V12A3H50336	300000368
F-5	EMI Test receiver	R&S	ESR	1316.3003K03- 102587-ct	- / -
F-6	Turntable Interface- Box	EMCO / ETS- LINDGREN	Model 105637	44583	300003747
F-7	Tower/Turntable Controller	EMCO / ETS- LINDGREN	Model 2090	64672	300003746
F-8	Tower	EMCO / ETS- LINDGREN	Model 2175	64762	300003745
F-9	Ultra Notch-Filter Rejected band Ch. 62	WRCD		9	
Radiated immunity in chamber F					
F-10	Control Computer	F+W		FW0502032	300003303
F-11	Signal Generator	R&S	SMB 100A	1406.6000k02- 113856	300005266
F-13	RF-Amplifier	Bonn	BLWA 0860- 250/100D	035491	300003210
F-14	Stacked Logper Antenna	Schwarzbeck	STLP9128 E	9128 E 013	300003408
F-14a	Bicon-Antenna	EMCO	3109	8906-2309	300000575
F-14b	Bicon-Antenna	Schwarzbeck	Balun VHBD 9134 elements BBFA 9146	3011 0057	300005385
F-15	RF-Amplifier	ar	1000LM20	20562	-/-
F-16	Directional Coupler	ar	DC7144A	312786	300003411
F-16a	Directional coupler	emv	DC 2000	9401-1677	300000592
F-18	Power Meter	R&S	NRP2	104973	300005114
F-19	Power sensor	R&S	NRP-Z91	103332	300005114-1
F-20	Power sensor	R&S	NRP-Z91	103333	300005114-2
F-35	RF- Amplifier	Bonn	BLMA 2060-5	097392A	300003908
F-36	Stacked Microwave Log.-Per. Antenna	Schwarzbeck	STLP9149	9149-044	300003919
Harmonics and flicker in front of chamber F					
F-21	Flicker and Harmonics Test System	Spitzenberger & Spies	PHE4500/B I PHE4500/B II	B5983 B5984	300003314
F-28	Power Supply	Hewlett Packard	6032 A	2920 A 04466	300000580
Radiated emission in chamber F > 1GHz					
F-29	Horn antenna	Schwarzbeck	BBHA 9120 B	188	300003896
F-30	Amplifier	ProNova	0518C-138	005	F 024
F-31	Amplifier	Miteq	42-00502650-28-5A	1103782	300003379
F-32	Horn antenna	Emco	3115	9709-5289	300000213
F-33	Spectrum Analyzer	R&S	FSU26	200809	300003874
F-34	Loop antenna	EMCO	6502	8905-2342	300000256

10 Observations

No observations, exceeding those reported with the single test cases, have been made.

Annex A Photographs of the test set-up

Photo 1: setup of radiated emission < 1 GHz

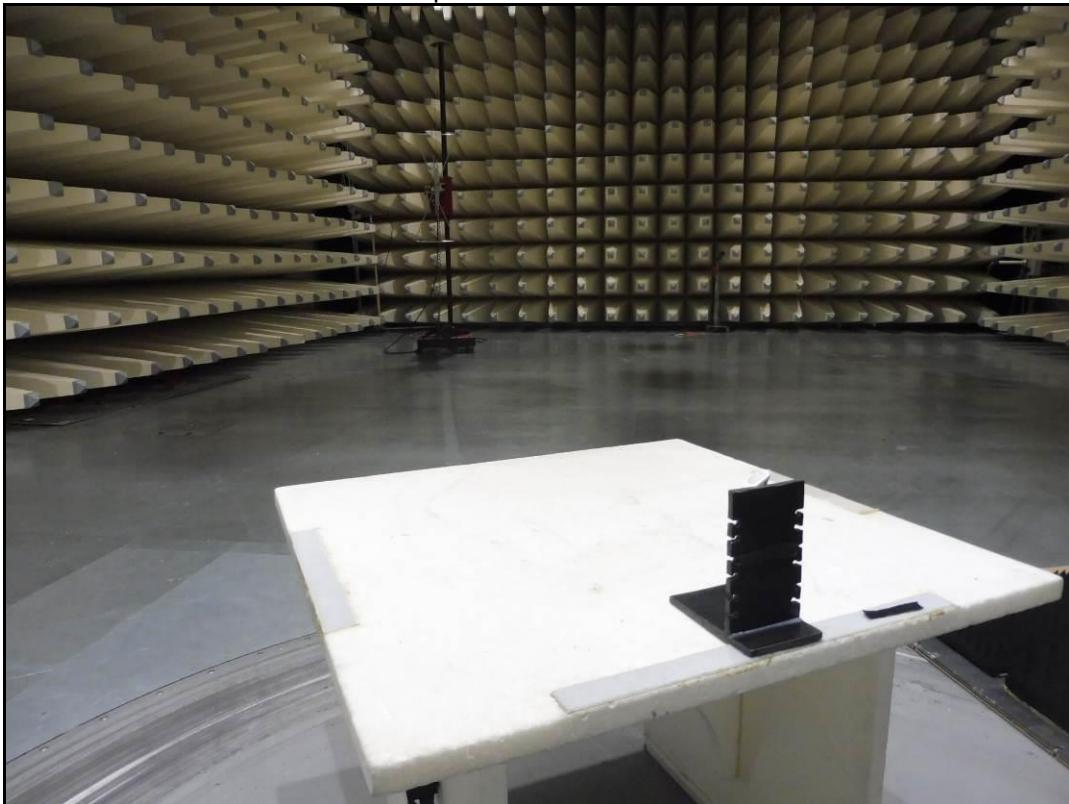


Photo 2: setup of radiated emission > 1 GHz


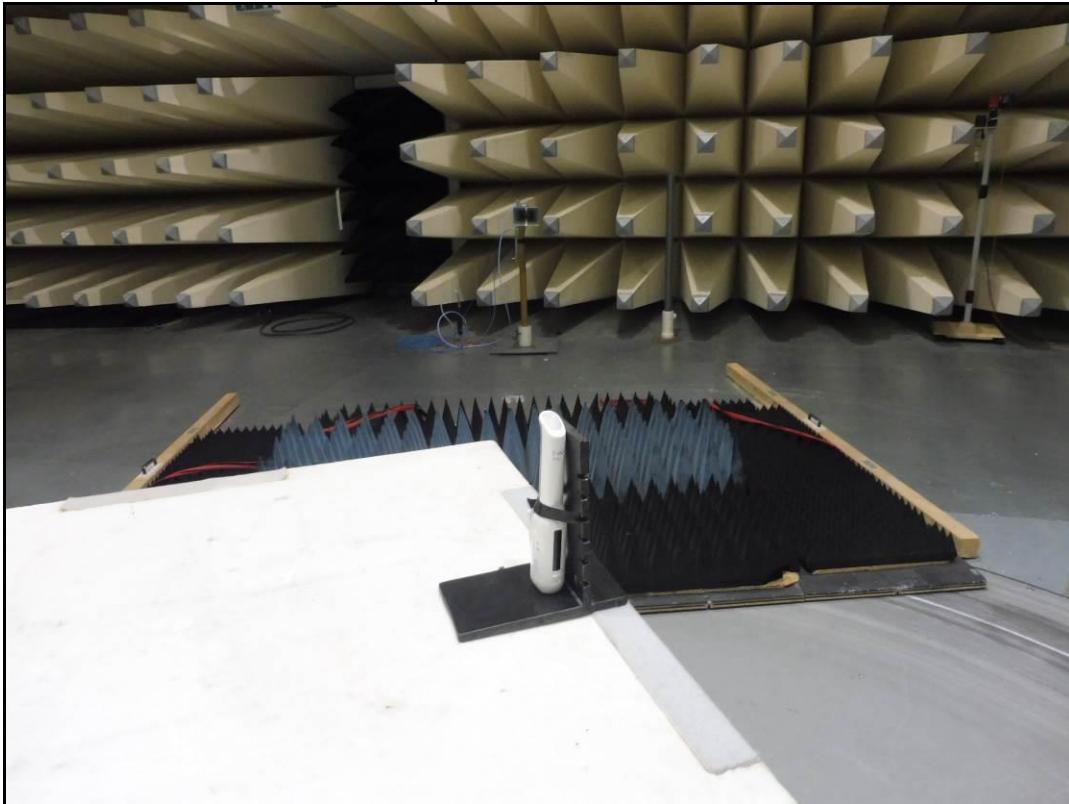


Photo 3: detail view of the setup of radiated emission

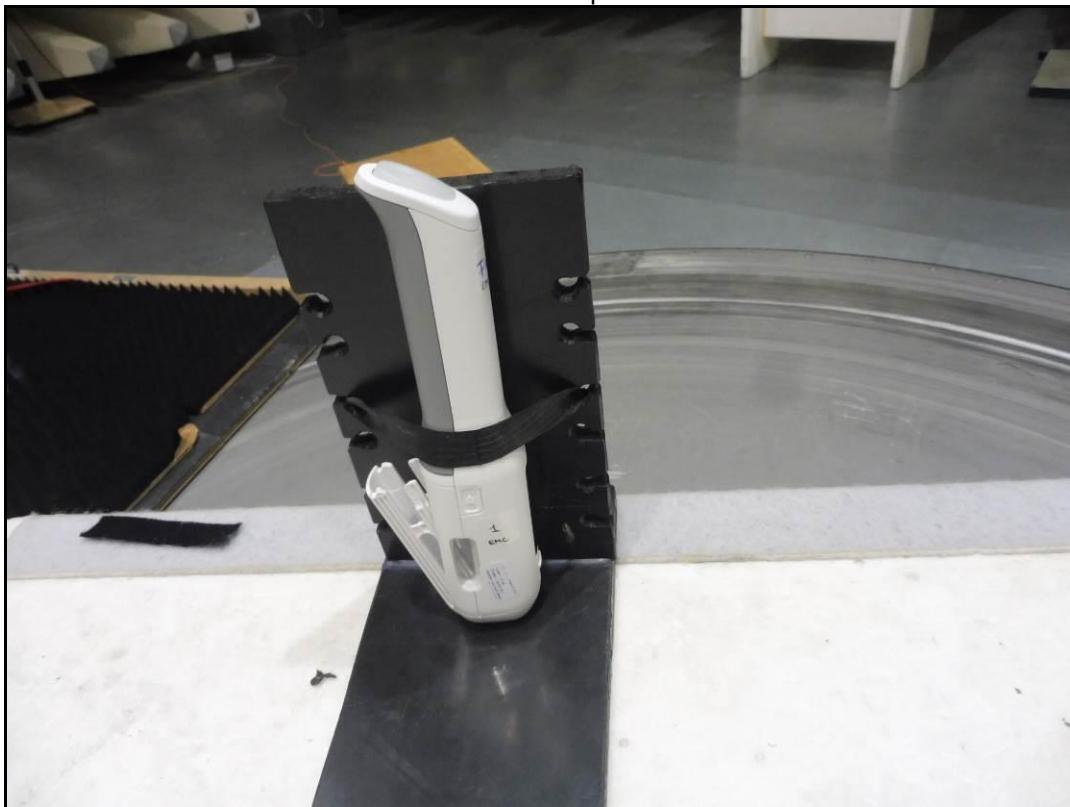

Annex B Photographs of the EUT

Photo 4: front view of the EUT



Photo 5: back view of the EUT



Photo 6: side view of the EUT



Photo 7: side view of the EUT



Photo 8: top view of the EUT



Photo 9: bottom view of the EUT



Photo 10: open cassette bay of the EUT


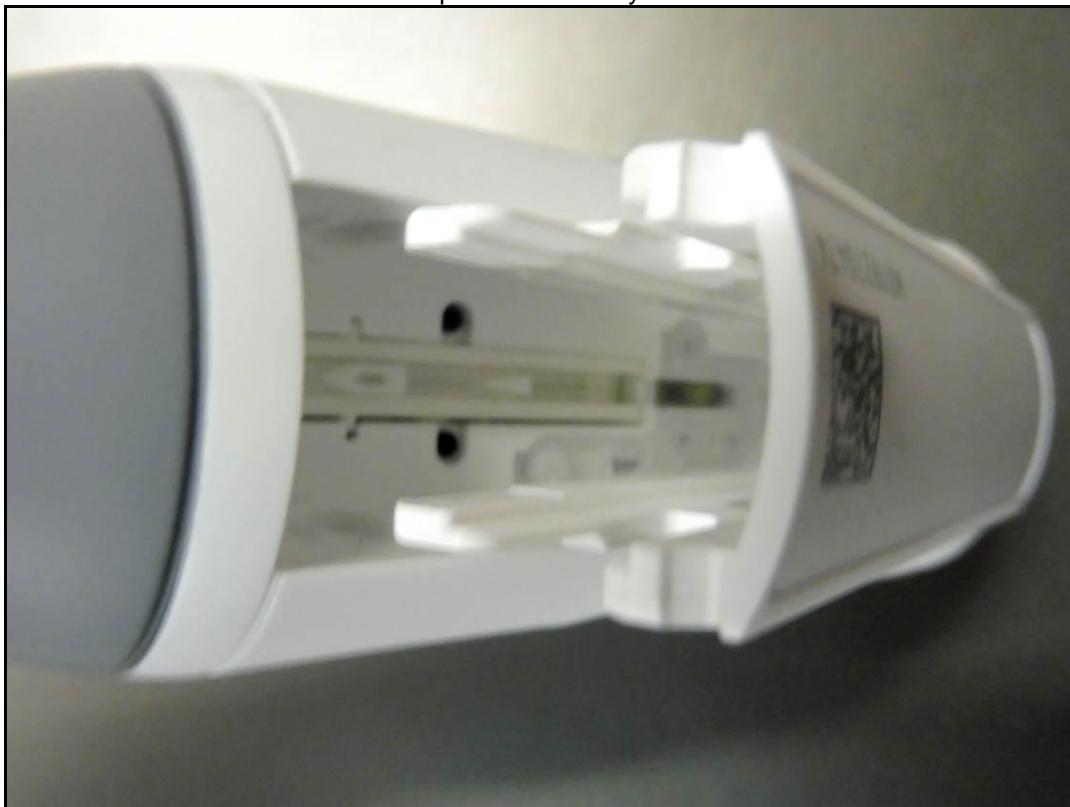


Photo 11: type plate of the EUT

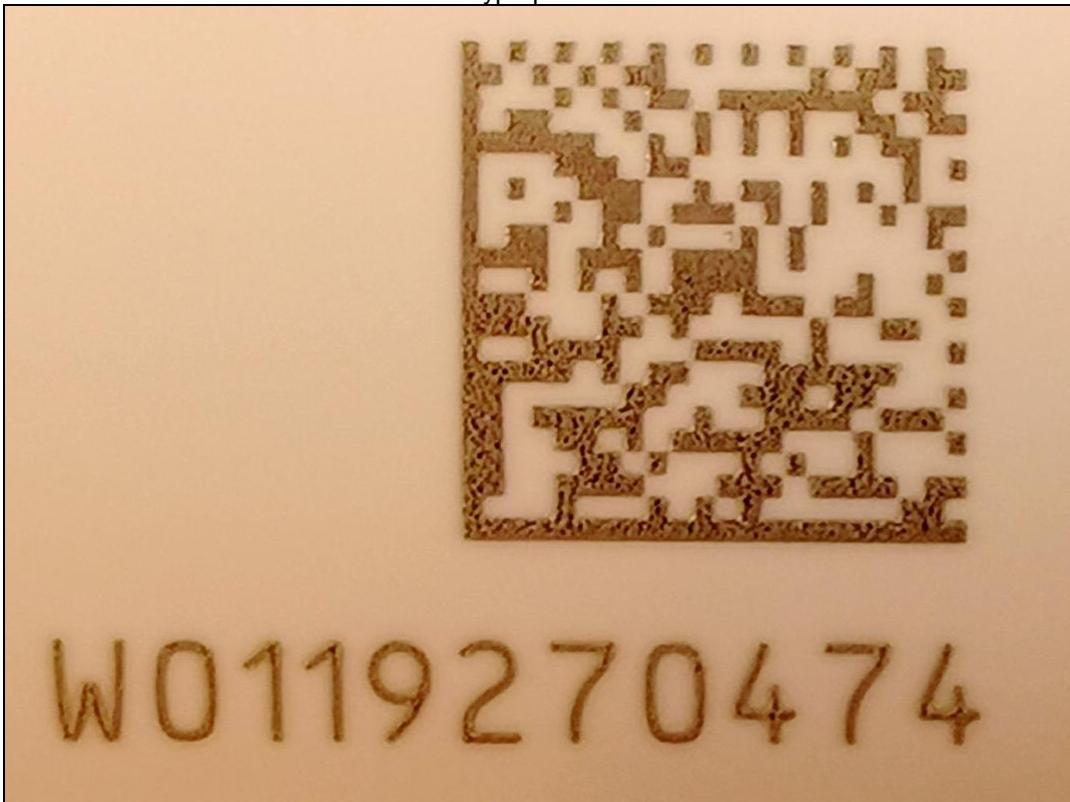

Annex C Table of contents of the used standard

contents of FCC Title 47 / Volume I / Chapter I / Part 15 / Subpart B (Unintentional Radiators)

§15.101	Equipment authorization of unintentional radiators	Applicable
§15.102	CPU boards and power supplies used in personal computers	NA
§15.103	Exempted devices	NA
§15.105	Information to the user	Applicable / see user manual
§15.107	Conducted limits	NA
§15.109	Radiated emission limits.	Applicable / see chapter 8 of this test report
§15.111	Antenna power conduction limits for receivers.	NA
§15.113	Power line carrier systems.	NA
§15.115	TV interface devices, including cable system terminal devices.	NA
§15.117	TV broadcast receivers.	NA
§15.118	Cable ready consumer electronics equipment.	NA
§15.119	[Reserved]	- / -
§15.120	Program blocking technology requirements for television receivers.	NA
§15.121	Scanning receivers and frequency converters used with scanning receivers.	NA
§15.122	[Reserved]	- / -
§15.123	Labeling of digital cable ready products.	NA

NA = not applicable / not reviewed


Annex D Document history

Version	Applied changes	Date of release
- / -	Initial release	2019-10-09
_A	add "Annex C Table of contents of the used standard"	2019-10-22

Annex E Further information

Glossary

DUT	-	Device under Test
EMC	-	Electromagnetic Compatibility
EUT	-	Equipment under Test
FCC	-	Federal Communication Commission
FCC ID	-	Company Identifier at FCC
HW	-	Hardware
IC	-	Industry Canada
Inv. No.	-	Inventory number
N/A	-	not applicable
S/N	-	Serial Number
SW	-	Software



CTC || advanced
member of RWTÜV group



Bundesnetzagentur

BNetzA-CAB-02/21-102

TEST REPORT

Test report no.: 1-8743/19-02-03

Testing laboratory

CTC advanced GmbH
Untertuerkheimer Strasse 6 – 10
66117 Saarbruecken / Germany
Phone: + 49 681 5 98 - 0
Fax: + 49 681 5 98 - 9075
Internet: <http://www.ctcadvanced.com>
e-mail: mail@ctcadvanced.com

Accredited Testing Laboratory:

The testing laboratory (area of testing) is accredited according to DIN EN ISO/IEC 17025 (2005) by the Deutsche Akkreditierungsstelle GmbH (DAkkS)

The accreditation is valid for the scope of testing procedures as stated in the accreditation certificate starting with the registration number: D-PL-12076-01.

Applicant

Flex
Via Ernesto Breda, 176
Milano, MI 20126 / ITALY
Phone: +39 02-8732 9244
Contact: Francesca Conte
e-mail: francesca.conte@flex.com

Manufacturer

AMGEN INC.
One Amgen Center Drive, EIN -95-354077600
Thousand Oaks CA 91320 / USA

Test standard/s

FCC - Title 47 CFR Part 15	FCC - Title 47 of the Code of Federal Regulations; Chapter I; Part 15 - Radio frequency devices – Subpart C – Intentional Radiators
RSS - 247 Issue 2	Digital Transmission Systems (DTSs), Frequency Hopping Systems (FHSs) and Licence - Exempt Local Area Network (LE-LAN) Devices
RSS - Gen Issue 5	Spectrum Management and Telecommunications Radio Standards Specification - General Requirements for Compliance of Radio Apparatus

For further applied test standards please refer to section 3 of this test report.

Test Item

Kind of test item:	Needle-based auto injector
Model name:	AutoTouch Wireless
FCC ID:	Not available
IC:	Not available
Frequency:	DTS band 2400 MHz to 2483.5 MHz
Technology tested:	Bluetooth® LE
Antenna:	Integrated chip antenna
Power supply:	3.0 V DC by external power supply / battery
Temperature range:	+10°C to +40°C

This test report is electronically signed and valid without handwritten signature. For verification of the electronic signatures, the public keys can be requested at the testing laboratory.

Test report authorized:

p.o.

Marco Bertolino
Lab Manager
Radio Communications & EMC

Test performed:

Mihail Dorongovskij
Lab Manager
Radio Communications & EMC

1 Table of contents

1	Table of contents	2
2	General information	3
2.1	Notes and disclaimer	3
2.2	Application details	3
2.3	Test laboratories sub-contracted	3
3	Test standard/s, references and accreditations	4
4	Test environment	5
5	Test item	5
5.1	General description	5
5.2	Additional information	5
6	Sequence of testing	6
6.1	Sequence of testing radiated spurious 9 kHz to 30 MHz	6
6.2	Sequence of testing radiated spurious 30 MHz to 1 GHz	7
6.3	Sequence of testing radiated spurious 1 GHz to 18 GHz	8
6.4	Sequence of testing radiated spurious above 18 GHz	9
7	Description of the test setup	10
7.1	Shielded semi anechoic chamber	11
7.2	Shielded fully anechoic chamber	12
7.3	Radiated measurements > 18 GHz	13
7.4	Conducted measurements Bluetooth system	14
8	Measurement uncertainty	15
9	Summary of measurement results	16
10	Additional comments	17
11	Measurement results	18
11.1	System gain	18
11.2	Power spectral density	19
11.3	DTS bandwidth – 6 dB bandwidth	20
11.4	Occupied bandwidth – 99% emission bandwidth	21
11.5	Maximum output power	22
11.6	Detailed spurious emissions @ the band edge - conducted	23
11.7	Band edge compliance conducted	24
11.8	TX spurious emissions conducted	26
11.9	Spurious emissions radiated below 30 MHz	28
11.10	Spurious emissions radiated 30 MHz to 1 GHz	31
11.11	Spurious emissions radiated above 1 GHz	36
Annex A	Glossary	42
Annex B	Document history	43
Annex C	Accreditation Certificate – D-PL-12076-01-04	43
Annex D	Accreditation Certificate – D-PL-12076-01-05	44
Annex E	Table of contents of the used standard	45

2 General information

2.1 Notes and disclaimer

The test results of this test report relate exclusively to the test item specified in this test report. CTC advanced GmbH does not assume responsibility for any conclusions and generalizations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item.

The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of CTC advanced GmbH.

The testing service provided by CTC advanced GmbH has been rendered under the current "General Terms and Conditions for CTC advanced GmbH".

CTC advanced GmbH will not be liable for any loss or damage resulting from false, inaccurate, inappropriate or incomplete product information provided by the customer.

Under no circumstances does the CTC advanced GmbH test report include any endorsement or warranty regarding the functionality, quality or performance of any other product or service provided.

Under no circumstances does the CTC advanced GmbH test report include or imply any product or service warranties from CTC advanced GmbH, including, without limitation, any implied warranties of merchantability, fitness for purpose, or non-infringement, all of which are expressly disclaimed by CTC advanced GmbH.

All rights and remedies regarding vendor's products and services for which CTC advanced GmbH has prepared this test report shall be provided by the party offering such products or services and not by CTC advanced GmbH.

In no case this test report can be considered as a Letter of Approval.

This test report is electronically signed and valid without handwritten signature. For verification of the electronic signatures, the public keys can be requested at the testing laboratory.

2.2 Application details

Date of receipt of order:	2019-07-29
Date of receipt of test item:	2019-08-21
Start of test:	2019-08-21
End of test:	2019-08-23
Person(s) present during the test:	-/-

2.3 Test laboratories sub-contracted

None

3 Test standard/s, references and accreditations

Test standard	Date	Description
FCC - Title 47 CFR Part 15	-/-	FCC - Title 47 of the Code of Federal Regulations; Chapter I; Part 15 - Radio frequency devices – Subpart C – Intentional Radiators
RSS - 247 Issue 2	February 2017	Digital Transmission Systems (DTSs), Frequency Hopping Systems (FHSs) and Licence - Exempt Local Area Network (LE-LAN) Devices
RSS - Gen Issue 5	April 2018	Spectrum Management and Telecommunications Radio Standards Specification - General Requirements for Compliance of Radio Apparatus

Guidance	Version	Description
DTS: KDB 558074 D01	v05r02	GUIDANCE FOR COMPLIANCE MEASUREMENTS ON DIGITAL TRANSMISSION SYSTEM, FREQUENCY HOPPING SPREAD SPECTRUM SYSTEM, AND HYBRID SYSTEM DEVICES OPERATING UNDER SECTION 15.247 OF THE FCC RULES
ANSI C63.4-2014	-/-	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz
ANSI C63.10-2013	-/-	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices

Accreditation	Description
D-PL-12076-01-04	Telecommunication and EMC Canada https://www.dakks.de/as/ast/d/D-PL-12076-01-04.pdf
D-PL-12076-01-05	Telecommunication FCC requirements https://www.dakks.de/as/ast/d/D-PL-12076-01-05.pdf



4 Test environment

Temperature	: T _{nom} T _{max} T _{min}	+22 °C during room temperature tests No tests under extreme environmental conditions required. No tests under extreme environmental conditions required.
Relative humidity content	: 42 %	
Barometric pressure	: 1018 hpa	
Power supply	: V _{nom} V _{max} V _{min}	3.0 V DC by external power supply / battery No tests under extreme environmental conditions required. No tests under extreme environmental conditions required.

5 Test item

5.1 General description

Kind of test item	: Needle-based auto injector
Type identification	: AutoTouch Wireless
HMN	: Not available
PMN	: Not available
HVIN	: Not available
FVIN	: Not available
S/N serial number	: Rad. W0119270287 Cond. W0119270283
Hardware status	: AMG00044070-100-BOM AT WRL Bill of Material Re. C
Software status	: n/a
Firmware status	: nRF5 SDK Direct Test Mode 15.2.0
Frequency band	: DTS band 2400 MHz to 2483.5 MHz
Type of radio transmission	: DSSS
Use of frequency spectrum	: GFSK
Type of modulation	: 40
Number of channels	: Integrated chip antenna
Antenna	: 3.0 V DC by external power supply / battery
Power supply	: +10°C to +40°C

5.2 Additional information

The content of the following annexes is defined in the QA. It may be that not all of the listed annexes are necessary for this report, thus some values in between may be missing.

Test setup and EUT photos are included in test report: 1-8743/19-02-01_AnnexA
1-8743/19-02-01_AnnexD

6 Sequence of testing

6.1 Sequence of testing radiated spurious 9 kHz to 30 MHz

Setup

- The equipment is set up to simulate normal operation mode as described in the user manual or defined by the manufacturer.
- If the EUT is a tabletop system, it is placed on a table with 0.8 m height.
- If the EUT is a floor standing device, it is placed directly on the turn table.
- Auxiliary equipment and cables are positioned to simulate normal operation conditions as described in ANSI C 63.4.
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- Measurement distance is 3 m (see ANSI C 63.4) – see test details.
- EUT is set into operation.

Premeasurement*

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna height is 1 m.
- At each turntable position the analyzer sweeps with positive-peak detector to find the maximum of all emissions.

Final measurement

- Identified emissions during the pre-measurement are maximized by the software by rotating the turntable from 0° to 360°.
- Loop antenna is rotated about its vertical axis for maximum response at each azimuth about the EUT. (For certain applications, the loop antenna plane may also need to be positioned horizontally at the specified distance from the EUT)
- The final measurement is done in the position (turntable and elevation) causing the highest emissions with quasi-peak (as described in ANSI C 63.4).
- Final levels, frequency, measuring time, bandwidth, turntable position, correction factor, margin to the limit and limit will be recorded. A plot with the graph of the premeasurement and the limit is stored.

*)Note: The sequence will be repeated three times with different EUT orientations.

6.2 Sequence of testing radiated spurious 30 MHz to 1 GHz

Setup

- The equipment is set up to simulate normal operation mode as described in the user manual or defined by the manufacturer.
- If the EUT is a tabletop system, a table with 0.8 m height is used, which is placed on the ground plane.
- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.
- Auxiliary equipment and cables are positioned to simulate normal operation conditions as described in ANSI C 63.4.
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- Measurement distance is 10 m or 3 m (see ANSI C 63.4) – see test details.
- EUT is set into operation.

Premereasurement

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna is polarized vertical and horizontal.
- The antenna height changes from 1 m to 3 m.
- At each turntable position, antenna polarization and height the analyzer sweeps three times in peak to find the maximum of all emissions.

Final measurement

- The final measurement is performed for at least six highest peaks according to the requirements of the ANSI C63.4.
- Based on antenna and turntable positions at which the peak values are measured the software maximize the peaks by changing turntable position $\pm 45^\circ$ and antenna height between 1 and 4 m.
- The final measurement is done with quasi-peak detector (as described in ANSI C 63.4).
- Final levels, frequency, measuring time, bandwidth, antenna height, antenna polarization, turntable angle, correction factor, margin to the limit and limit are recorded. A plot with the graph of the premeasurement with marked maximum final results and the limit is stored.

6.3 Sequence of testing radiated spurious 1 GHz to 18 GHz

Setup

- The equipment is set up to simulate normal operation mode as described in the user manual or defined by the manufacturer.
- If the EUT is a tabletop system, a 2-axis positioner with 1.5 m height is used.
- If the EUT is a floor standing device, it is placed directly on the turn table.
- Auxiliary equipment and cables are positioned to simulate normal operation conditions as described in ANSI C 63.4.
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- Measurement distance is 3 m (see ANSI C 63.4) – see test details.
- EUT is set into operation.

Premereasurement

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna is polarized vertical and horizontal.
- The antenna height is 1.5 m.
- At each turntable position and antenna polarization the analyzer sweeps with positive peak detector to find the maximum of all emissions.

Final measurement

- The final measurement is performed for at least six highest peaks according to the requirements of the ANSI C63.4.
- Based on antenna and turntable positions at which the peak values are measured the software maximizes the peaks by rotating the turntable from 0° to 360°. This measurement is repeated for different EUT-table positions (0° to 150° in 30°-steps) and for both antenna polarizations.
- The final measurement is done in the position (turntable, EUT-table and antenna polarization) causing the highest emissions with Peak and RMS detector (as described in ANSI C 63.4).
- Final levels, frequency, measuring time, bandwidth, turntable position, EUT-table position, antenna polarization, correction factor, margin to the limit and limit are recorded. A plot with the graph of the premeasurement with marked maximum final results and the limit is stored.

6.4 Sequence of testing radiated spurious above 18 GHz

Setup

- The equipment is set up to simulate normal operation mode as described in the user manual or defined by the manufacturer.
- Auxiliary equipment and cables are positioned to simulate normal operation conditions as described in ANSI C 63.4.
- The AC power port of the EUT (if available) is connected to a power outlet.
- The measurement distance is as appropriate (e.g. 0.5 m).
- The EUT is set into operation.

Premeasurement

- The test antenna is handheld and moved carefully over the EUT to cover the EUT's whole sphere and different polarizations of the antenna.

Final measurement

- The final measurement is performed at the position and antenna orientation causing the highest emissions with Peak and RMS detector (as described in ANSI C 63.4).
- Final levels, frequency, measuring time, bandwidth, correction factor, margin to the limit and limit are recorded. A plot with the graph of the premeasurement and the limit is stored.

7 Description of the test setup

Typically, the calibrations of the test apparatus are commissioned to and performed by an accredited calibration laboratory. The calibration intervals are determined in accordance with the DIN EN ISO/IEC 17025. In addition to the external calibrations, the laboratory executes comparison measurements with other calibrated test systems or effective verifications. Weekly chamber inspections and range calibrations are performed. Where possible, RF generating and signaling equipment as well as measuring receivers and analyzers are connected to an external high-precision 10 MHz reference (GPS-based or rubidium frequency standard).


In order to simplify the identification of the equipment used at some special tests, some items of test equipment and ancillaries can be provided with an identifier or number in the equipment list below (Lab/Item).

Agenda: Kind of Calibration

k	calibration / calibrated	EK	limited calibration
ne	not required (k, ev, izw, zw not required)	zw	cyclical maintenance (external cyclical maintenance)
ev	periodic self verification	izw	internal cyclical maintenance
Ve	long-term stability recognized	g	blocked for accredited testing
vlk!	Attention: extended calibration interval		
NK!	Attention: not calibrated	*)	next calibration ordered / currently in progress

7.1 Shielded semi anechoic chamber

The radiated measurements are performed in vertical and horizontal plane in the frequency range from 30 MHz to 1 GHz in semi-anechoic chambers. The EUT is positioned on a non-conductive support with a height of 0.80 m above a conductive ground plane that covers the whole chamber. The receiving antennas are conform to specifications ANSI C63. These antennas can be moved over the height range between 1.0 m and 4.0 m in order to search for maximum field strength emitted from EUT. The measurement distances between EUT and receiving antennas are indicated in the test setups for the various frequency ranges. For each measurement, the EUT is rotated in all three axes until the maximum field strength is received. The wanted and unwanted emissions are received by spectrum analyzers where the detector modes and resolution bandwidths over various frequency ranges are set according to requirement ANSI C63.

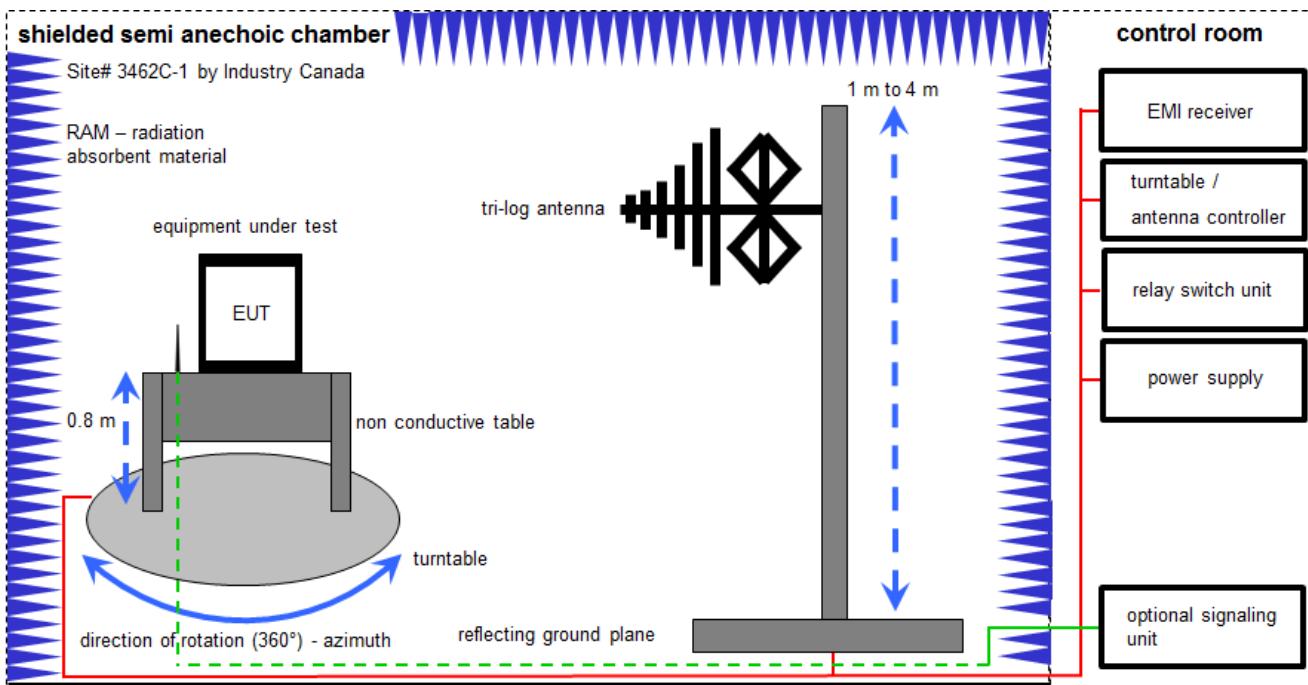

Measurement distance: tri-log antenna 10 meter

EMC32 software version: 10.30.0

$$FS = UR + CL + AF$$

(FS-field strength; UR-voltage at the receiver; CL-loss of the cable; AF-antenna factor)


Example calculation:

$$FS [dB\mu V/m] = 12.35 [dB\mu V/m] + 1.90 [dB] + 16.80 [dB/m] = 31.05 [dB\mu V/m] (35.69 \mu V/m)$$

Equipment table:

No.	Lab / Item	Equipment	Type	Manufacturer	Serial No.	INV. No.	Kind of Calibration	Last Calibration	Next Calibration
1	A	Switch-Unit	3488A	HP	2719A14505	30000368	ev	-/-	-/-
2	A	EMI Test Receiver	ESCI 3	R&S	100083	300003312	k	12.12.2018	11.12.2019
3	A	Antenna Tower	Model 2175	ETS-Lindgren	64762	300003745	izw	-/-	-/-
4	A	Positioning Controller	Model 2090	ETS-Lindgren	64672	300003746	izw	-/-	-/-
5	A	Turntable Interface-Box	Model 105637	ETS-Lindgren	44583	300003747	izw	-/-	-/-
6	A	TRILOG Broadband Test-Antenna 30 MHz - 3 GHz	VULB9163	Schwarzbeck Mess - Elektronik	371	300003854	viKI!	24.11.2017	23.11.2020

7.2 Shielded fully anechoic chamber

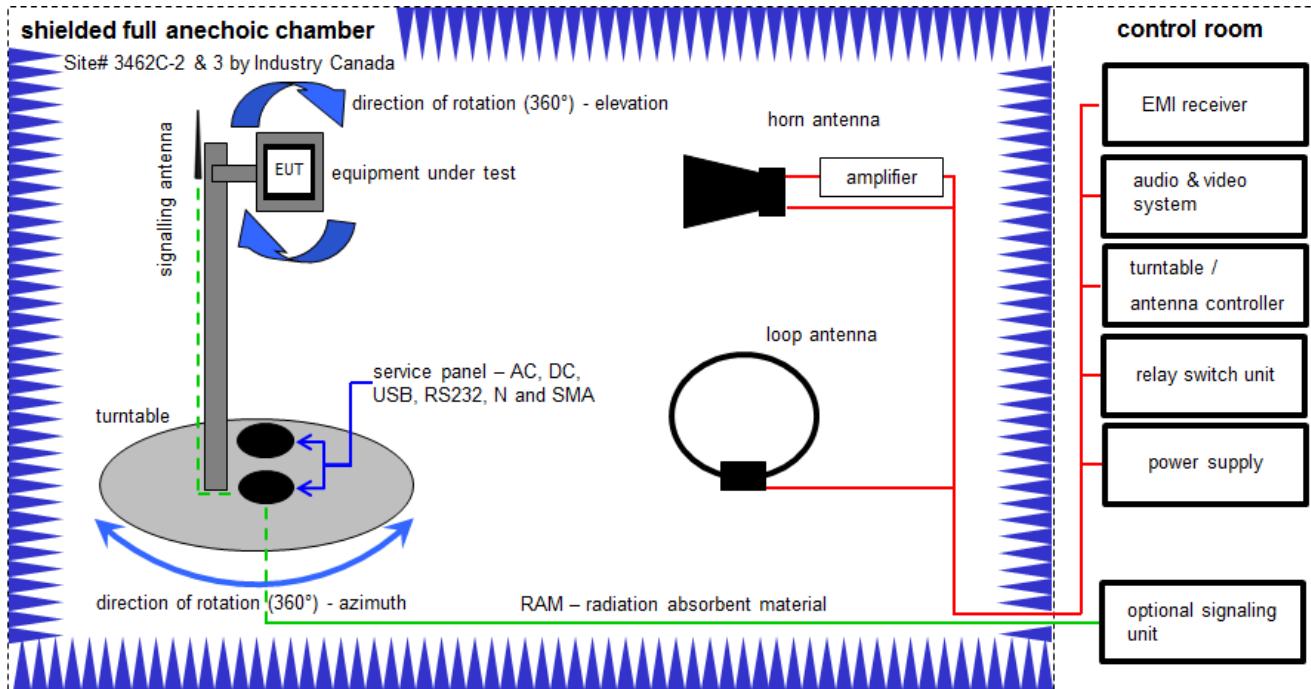

Measurement distance: horn antenna 3 meter; loop antenna 3 meter

$$FS = UR + CA + AF$$

(FS-field strength; UR-voltage at the receiver; CA-loss of the signal path; AF-antenna factor)


Example calculation:

$$FS [dB\mu V/m] = 40.0 [dB\mu V/m] + (-35.8) [dB] + 32.9 [dB/m] = 37.1 [dB\mu V/m] (71.61 \mu V/m)$$

Equipment table:

No.	Lab / Item	Equipment	Type	Manufacturer	Serial No.	INV. No.	Kind of Calibration	Last Calibration	Next Calibration
1	C	Active Loop Antenna 9 kHz to 30 MHz	6502	EMCO	2210	300001015	vIKI!	13.06.2019	12.06.2021
2	A, B, C	Anechoic chamber	-/-	TDK	-/-	300003726	ne	-/-	-/-
3	A, B	Double-Ridged Waveguide Horn Antenna 1-18.0GHz	3115	EMCO	9107-3697	300001605	vIKI!	27.02.2019	26.02.2021
4	A, B, C	Switch / Control Unit	3488A	HP	*	300000199	ne	-/-	-/-
5	A	Band Reject Filter	WRCG2400/2483-2375/2505-50/10SS	Wainwright	26	300003792	ne	-/-	-/-
6	A, B, C	EMI Test Receiver 9kHz-26.5GHz	ESR26	R&S	101376	300005063	k	19.12.2018	18.12.2019
7	A	Highpass Filter	WHKX2.6/18G-10SS	Wainwright	12	300004651	ne	-/-	-/-
8	A	Highpass Filter	WHKX7.0/18G-8SS	Wainwright	18	300003789	ne	-/-	-/-
9	A, B	Broadband Amplifier 0.5-18 GHz	CBLU5184540	CERNEX	22051	300004483	ev	-/-	-/-
10	A, B, C	4U RF Switch Platform	L4491A	Agilent Technologies	MY50000032	300004510	ne	-/-	-/-
11	A, B, C	NEXIO EMV-Software	BAT EMC V3.16.0.49	EMCO	-/-	300004682	ne	-/-	-/-
12	A, B, C	PC	ExOne	F+W	-/-	300004703	ne	-/-	-/-

7.3 Radiated measurements > 18 GHz

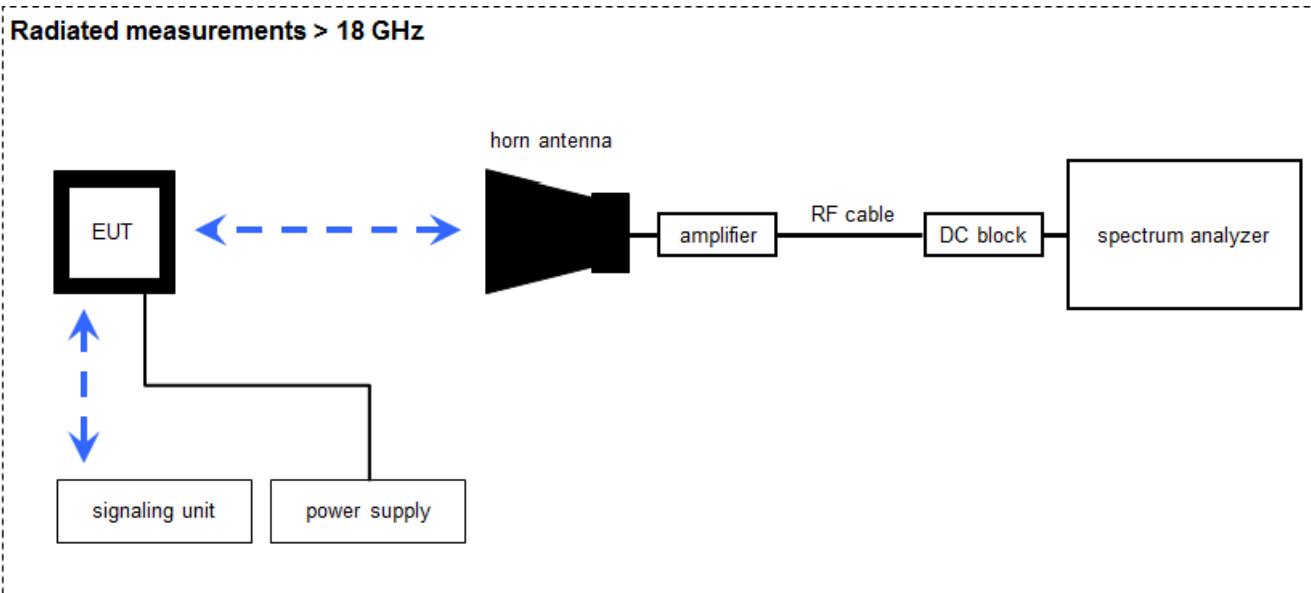

Measurement distance: horn antenna 50 cm

$$FS = UR + CA + AF$$

(FS-field strength; UR-voltage at the receiver; CA-loss signal path & distance correction; AF-antenna factor)


Example calculation:

$$FS [\text{dB}\mu\text{V}/\text{m}] = 40.0 [\text{dB}\mu\text{V}/\text{m}] + (-60.1) [\text{dB}] + 36.74 [\text{dB}/\text{m}] = 16.64 [\text{dB}\mu\text{V}/\text{m}] (6.79 \mu\text{V}/\text{m})$$

Equipment table:

No.	Lab / Item	Equipment	Type	Manufacturer	Serial No.	INV. No.	Kind of Calibration	Last Calibration	Next Calibration
1	A	Microwave System Amplifier, 0.5-26.5 GHz	83017A	HP	00419	300002268	ev	-/-	-/-
2	A	Std. Gain Horn Antenna 18.0-26.5 GHz	638	Narda	-/-	300000486	vlKI!	13.12.2017	12.12.2019
3	A	Signal Analyzer 40 GHz	FSV40	R&S	101042	300004517	vlKI!	17.12.2018	16.12.2019
4	A	RF-Cable	ST18/SMAm/SMAm/48	Huber & Suhner	Batch no. 127377	400001183	ev	-/-	-/-
5	A	DC-Blocker 0.1-40 GHz	8141A	Inmet	-/-	400001185	ev	-/-	-/-

7.4 Conducted measurements Bluetooth system

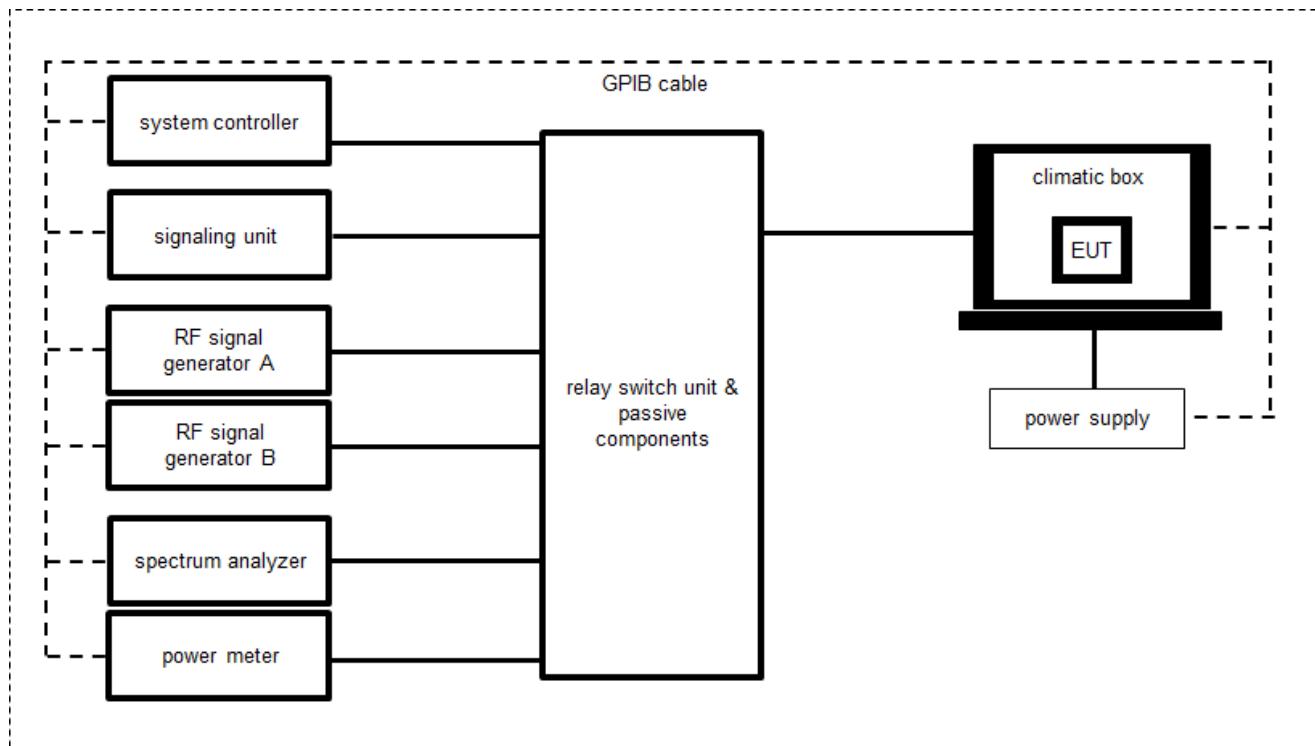

OP = AV + CA
 (OP-output power; AV-analyzer value; CA-loss signal path)

Example calculation:
 OP [dBm] = 6.0 [dBm] + 11.7 [dB] = 17.7 [dBm] (58.88 mW)

Equipment table:

No.	Lab / Item	Equipment	Type	Manufacturer	Serial No.	INV. No.	Kind of Calibration	Last Calibration	Next Calibration
1	A	Wireless Connectivity Tester	CMW270	Rohde & Schwarz	100683	300005133	k	03.01.2018	02.01.2020
2	A	Spectrum Analyzer	FSV30	Rohde & Schwarz	103809	300005359	vlKI!	17.12.2018	16.12.2020
3	A	Relay Switch Matrix	RSM-1	CTC advanced GmbH	0001	400001355	ev	07.02.2019	06.02.2020
4	A	Tester Software RadioStar (C.BER2 for BT Conformance)	Version 1.0.0.X	CTC advanced GmbH	0001	400001380	ne	-/-	-/-
5	A	PC Laboratory	Exone	Fröhlich + Walter	S2642279-03 / 10	300004179	ne	-/-	-/-
6	A	Hygro-Thermometer	-/-, 5-45°C, 20-100%rF	Thies Clima	-/-	400000109	ev	11.05.2018	10.05.2020
7	A	Power Supply DC	NGSM 32/10	Rohde & Schwarz	3939	400000192	vlKI!	31.01.2017	30.01.2020

8 Measurement uncertainty

Measurement uncertainty	
Test case	Uncertainty
Antenna gain	± 3 dB
Spectrum bandwidth	± 21.5 kHz absolute; ± 15.0 kHz relative
Maximum output power	± 1 dB
Detailed conducted spurious emissions @ the band edge	± 1 dB
Band edge compliance radiated	± 3 dB
Band edge compliance conducted	± 1.5 dB
Spurious emissions conducted	± 3 dB
Spurious emissions radiated below 30 MHz	± 3 dB
Spurious emissions radiated 30 MHz to 1 GHz	± 3 dB
Spurious emissions radiated 1 GHz to 12.75 GHz	± 3.7 dB
Spurious emissions radiated above 12.75 GHz	± 4.5 dB
Spurious emissions conducted below 30 MHz (AC conducted)	± 2.6 dB

9 Summary of measurement results

<input checked="" type="checkbox"/>	No deviations from the technical specifications were ascertained
<input type="checkbox"/>	There were deviations from the technical specifications ascertained
<input type="checkbox"/>	This test report is only a partial test report. The content and verdict of the performed test cases are listed below.

TC Identifier	Description	Verdict	Date	Remark
RF-Testing	CFR Part 15 RSS - 247, Issue 2	See table!	2019-10-21	-/-

Test specification clause	Test case	Guideline	Temperature conditions	Power source voltages	Mode	C	NC	NA	NP	Remark
§15.247(b)(4) RSS - 247 / 5.4 (4)	System gain	-/-	Nominal	Nominal	1 Msps	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-/-
§15.247(e) RSS - 247 / 5.2 (b)	Power spectral density	KDB 558074 DTS clause: 8.4	Nominal	Nominal	1 Msps	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-/-
§15.247(a)(2) RSS - 247 / 5.2 (a)	DTS bandwidth – 6 dB bandwidth	KDB 558074 DTS clause: 8.2	Nominal	Nominal	1 Msps	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-/-
RSS Gen clause 4.6.1	Occupied bandwidth	-/-	Nominal	Nominal	1 Msps	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-/-
§15.247(b)(3) RSS - 247 / 5.4 (4)	Maximum output power	KDB 558074 DTS clause: 8.3.1.1	Nominal	Nominal	1 Msps	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-/-
§15.247(d) RSS - 247 / 5.5	Detailed spurious emissions @ the band edge - conducted	KDB 558074 DTS clause: 8.5	Nominal	Nominal	1 Msps	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-/-
§15.205 RSS - 247 / 5.5 RSS - Gen	Band edge compliance cond. & rad.	KDB 558074 DTS clause: 8.7.2 or 8.7.3	Nominal	Nominal	1 Msps	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-/-
§15.247(d) RSS - 247 / 5.5	TX spurious emissions conducted	KDB 558074 DTS clause: 8.5	Nominal	Nominal	1 Msps	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-/-
§15.209(a) RSS - Gen	Spurious emissions radiated below 30 MHz	-/-	Nominal	Nominal	1 Msps	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-/-
15.247(d) RSS - 247 / 5.5 §15.109 RSS - Gen	Spurious emissions radiated 30 MHz to 1 GHz	-/-	Nominal	Nominal	1 Msps RX mode	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-/-
§15.247(d) RSS - 247 / 5.5 §15.109 RSS - Gen	Spurious emissions radiated above 1 GHz	-/-	Nominal	Nominal	1 Msps RX mode	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-/-
§15.107(a) §15.207	Conducted emissions below 30 MHz (AC conducted)	-/-	Nominal	Nominal	1 Msps	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	-/-

Note: C = Compliant; NC = Not compliant; NA = Not applicable; NP = Not performed

10 Additional comments

The Bluetooth® word mark and logos are owned by the Bluetooth SIG Inc. and any use of such marks by CTC advanced GmbH is under license.

Reference documents: 1-8743_19-02-03_Annex_MR_A_1.pdf

Special test descriptions: All tests were performed with modified samples which have an additional UART cable in order to control the Bluetooth chip via Direct Test Mode. The conducted tests were performed with permanent connection between the sample and the CMW. During radiated tests the connection was removed after setting the device into continuous transmission mode. The end product does not have the UART cable.

Configuration descriptions:

Bluetooth Low Energy	
Longest Supported payload (37 – 255 Byte)	Tx: 255, RX: 255
LE 1M PHY supported	Yes
LE 2M PHY supported	No
Stable Modulation Index supported (SMI)	No
LE Coded PHY supported (S=2)	No
LE Coded PHY supported (S=8)	No

Test mode: Bluetooth LE Test mode enabled (EUT is controlled by CMW) Special software is used. EUT is transmitting pseudo random data by itself

Antennas and transmit operating modes: Operating mode 1 (single antenna)

- *Equipment with 1 antenna,*
- *Equipment with 2 diversity antennas operating in switched diversity mode by which at any moment in time only 1 antenna is used,*
- *Smart antenna system with 2 or more transmit/receive chains, but operating in a mode where only 1 transmit/receive chain is used)*

 Operating mode 2 (multiple antennas, no beamforming)

- *Equipment operating in this mode contains a smart antenna system using two or more transmit/receive chains simultaneously but without beamforming.*

 Operating mode 3 (multiple antennas, with beamforming)

- *Equipment operating in this mode contains a smart antenna system using two or more transmit/receive chains simultaneously with beamforming.*
In addition to the antenna assembly gain (G), the beamforming gain (Y) may have to be taken into account when performing the measurements.

11 Measurement results

11.1 System gain

Measurement:

The antenna gain of the complete system is calculated by the difference of radiated power in EIRP and the conducted power of the EUT.

Measurement parameters (radiated)	
Detector	Peak
Sweep time	Auto
Resolution bandwidth	3 MHz
Video bandwidth	3 MHz
Span	5 MHz
Trace mode	Max hold
Test setup	See sub clause 7.2 B
Measurement uncertainty	See sub clause 8

Measurement parameters (conducted)	
External result file	1-8743_19-02-03_Annex_MR_A_1.pdf Common2G4 Peak Output Power conducted 3MHz_3MHz
Test setup	See sub clause 7.4 A
Measurement uncertainty	See sub clause 8

Limits:

FCC	IC
If > 6 dBi, the output power and power density limit reduction required	

Results:

	2402 MHz	2440 MHz	2480 MHz
Conducted power [dBm] Measured with GFSK modulation (1 Msps)	-6.9	-7.8	-7.3
Radiated power [dBm] Measured with GFSK modulation (1 Msps)	-0.4	-1.4	-2.0
Gain [dBi] Calculated	6.5	6.4	5.3

11.2 Power spectral density

Description:

Measurement of the power spectral density of a digital modulated system.

Measurement parameters	
External result file	1-8743_19-02-03_Annex_MR_A_1.pdf FCC Part 15.247 Peak Power Spectral Density DTS
Test setup	See sub clause 7.4 A
Measurement uncertainty	See sub clause 8

Limits:

FCC	IC
Power spectral density	
For digitally modulated systems the transmitter power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission or over 1.0 second if the transmission exceeds 1.0-second duration.	
Gain > 6 dBi; 8 dBm – 0.5 dB = 7.5 dBm @ 3 kHz	

Results:

	Frequency		
	2402 MHz	2440 MHz	2480 MHz
Power spectral density [dBm / 3kHz] 1 Msps	-23.2	-24.2	-23.8

11.3 DTS bandwidth – 6 dB bandwidth

Description:

Measurement of the 6 dB bandwidth of the modulated signal.

Measurement parameters	
External result file	1-8743_19-02-03_Annex_MR_A_1.pdf FCC Part 15.247 Bandwidth 6dB DTS
Test setup	See sub clause 7.4 A
Measurement uncertainty	See sub clause 8

Limits:

FCC	IC
DTS bandwidth – 6 dB bandwidth	
Systems using digital modulation techniques may operate in the 2400–2483.5 MHz band. The minimum 6 dB bandwidth shall be at least 500 kHz.	

Results:

	Frequency		
	2402 MHz	2440 MHz	2480 MHz
6 dB bandwidth [kHz] 1 Msps	702	710	712

11.4 Occupied bandwidth – 99% emission bandwidth

Description:

Measurement of the 99% bandwidth of the modulated signal acc. RSS-GEN.

Measurement parameters	
External result file	1-8743_19-02-03_Annex_MR_A_1.pdf FCC Part 15.247 Bandwidth 99PCT
Test setup	See sub clause 7.4 A
Measurement uncertainty	See sub clause 8

Usage:

-/-	IC
Occupied bandwidth – 99% emission bandwidth	
OBW is necessary for emission designator	

Results:

	Frequency		
	2402 MHz	2440 MHz	2480 MHz
99% bandwidth [kHz] 1 Msps	1046	1049	1048

11.5 Maximum output power

Description:

Measurement of the maximum output power conducted. EUT in single channel mode.

Measurement parameters	
External result file	1-8743_19-02-03_Annex_MR_A_1.pdf FCC Part 15.247 Maximum Peak Conducted Output Power DTS
Test setup	See sub clause 7.4 A
Measurement uncertainty	See sub clause 8

Limits:

FCC	IC
Maximum output power	
Conducted: 1.0 W – antenna gain max. 6 dBi	
Gain > 6 dBi; 30 dBm – 0.5 dB = 29.5 dBm	

Results:

	Frequency		
	2402 MHz	2440 MHz	2480 MHz
Maximum output power conducted [dBm] 1 Msps	-7.0	-7.8	-7.3

11.6 Detailed spurious emissions @ the band edge - conducted

Description:

Measurement of the conducted band edge compliance. EUT is measured at the lower and upper band edge in single channel.

Measurement parameters	
External result file	1-8743_19-02-03_Annex_MR_A_1.pdf FCC Part 15.247 TX Spurious Conducted
Test setup	See sub clause 7.4 A
Measurement uncertainty	See sub clause 8

Limits:

FCC	IC
In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required.	

Results:

Scenario	Spurious band edge conducted [dB]
Data rate	1 Msps
Lower band edge	> 20 dB
Upper band edge	> 20 dB

11.7 Band edge compliance conducted

Description:

Measurement of the radiated band edge compliance with a conducted test setup.

Measurement parameters	
External result file	1-8743_19-02-03_Annex_MR_A_1.pdf FCC Part 15.247 Restricted Band Edge Conducted Peak DTS
Test setup	See sub clause 7.4 A
Measurement uncertainty	See sub clause 8

Limits:

FCC	IC
-41.26 dBm	

Results:

band edge compliance / dBm (gain calculation)		
Data rate	1 Msps	
Max. lower band edge power conducted		-71.5
Antenna gain / dBi		6.5
Max. lower band edge power radiated		-65.0
Max. upper band edge power conducted		-67.9
Antenna gain / dBi		5.3
Max. upper band edge power radiated		-62.6

11.8 TX spurious emissions conducted

Description:

Measurement of the conducted spurious emissions in transmit mode. The EUT is set to single channel mode and the transmit frequencies are 2402 MHz, 2440 MHz and 2480 MHz.

Measurement parameters	
External result file	1-8743_19-02-03_Annex_MR_A_1.pdf FCC Part 15.247 TX Spurious Conducted
Test setup	See sub clause 7.4 A
Measurement uncertainty	See sub clause 8

Limits:

FCC	IC
TX spurious emissions conducted	
In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required	

Results: 1 Msps

TX spurious emissions conducted					
f [MHz]		amplitude of emission [dBm]	limit max. allowed emission power	actual attenuation below frequency of operation [dB]	results
2402		-8.4	30 dBm		Operating frequency
All detected emissions are compliant with the -20 dBc limit!			-20 dBc		compliant
2440		-8.1	30 dBm		Operating frequency
All detected emissions are compliant with the -20 dBc limit!			-20 dBc		compliant
2480		-8.2	30 dBm		Operating frequency
All detected emissions are compliant with the -20 dBc limit!			-20 dBc		compliant

11.9 Spurious emissions radiated below 30 MHz

Description:

Measurement of the radiated spurious emissions in transmit mode below 30 MHz. The EUT is set to single channel mode and the transmit frequencies are 2402 MHz, 2440 MHz and 2480 MHz. The limits are recalculated to a measurement distance of 3 m according the ANSI C63.10.



Measurement parameters	
Detector	Peak / Quasi peak
Sweep time	Auto
Resolution bandwidth	F < 150 kHz: 200 Hz F > 150 kHz: 9 kHz
Video bandwidth	F < 150 kHz: 1 kHz F > 150 kHz: 30 kHz
Span	9 kHz to 30 MHz
Trace mode	Max hold
Test setup	See sub clause 7.2 C
Measurement uncertainty	See sub clause 8

Limits:


FCC		IC
TX spurious emissions radiated below 30 MHz		
Frequency (MHz)	Field strength (dB μ V/m)	Measurement distance
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30

Results:

TX spurious emissions radiated below 30 MHz [dB μ V/m]		
F [MHz]	Detector	Level [dB μ V/m]
All detected emissions are more than 20 dB below the limit.		

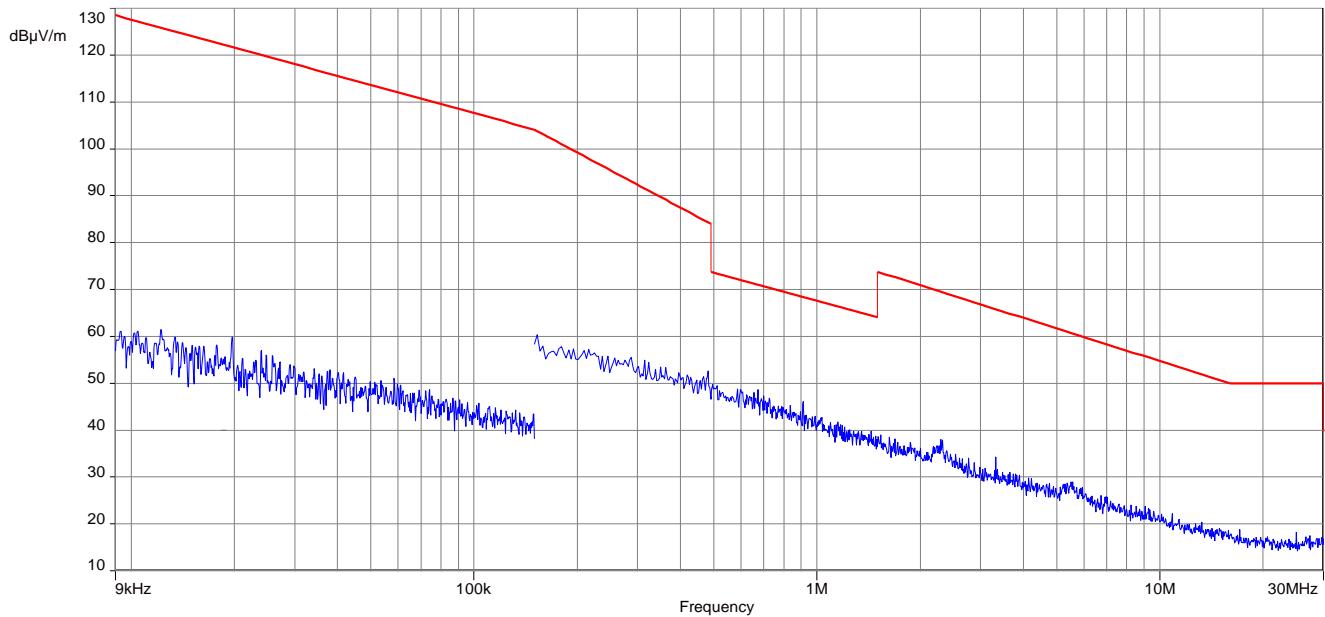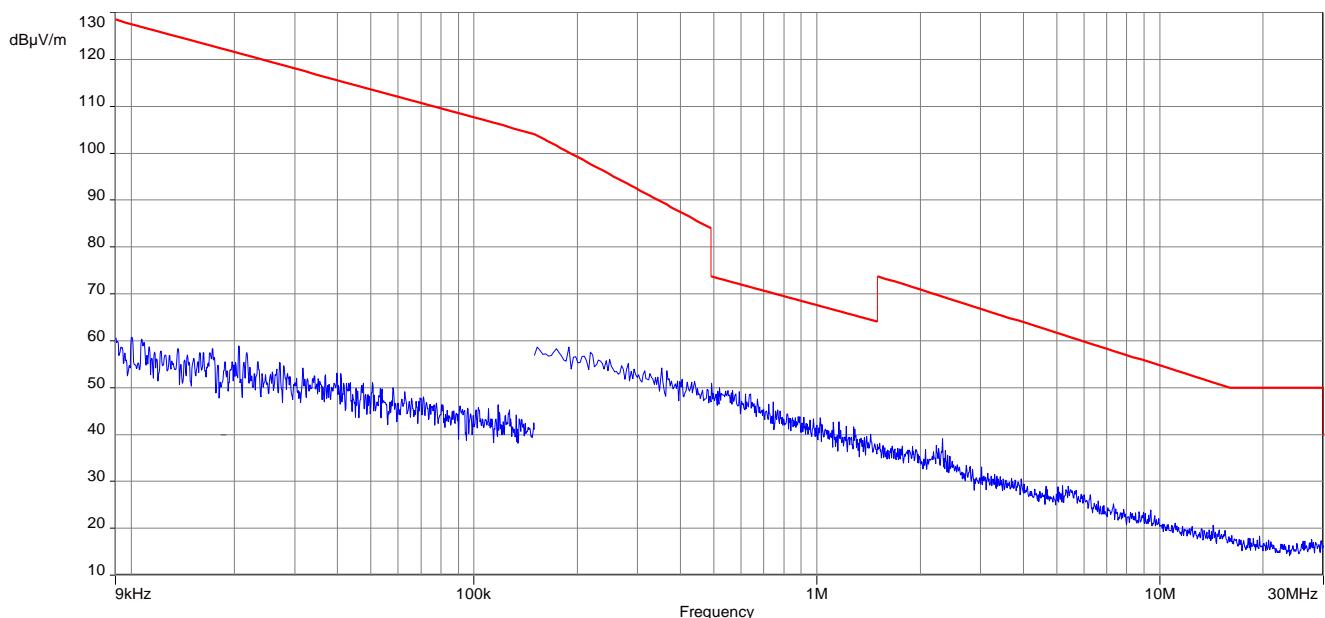Plots:**Plot 1: 9 kHz to 30 MHz, 2402 MHz, transmit mode, 1 Msps****Plot 2: 9 kHz to 30 MHz, 2440 MHz, transmit mode, 1 Msps**

Plot 3: 9 kHz to 30 MHz, 2480 MHz, transmit mode, 1 Msps

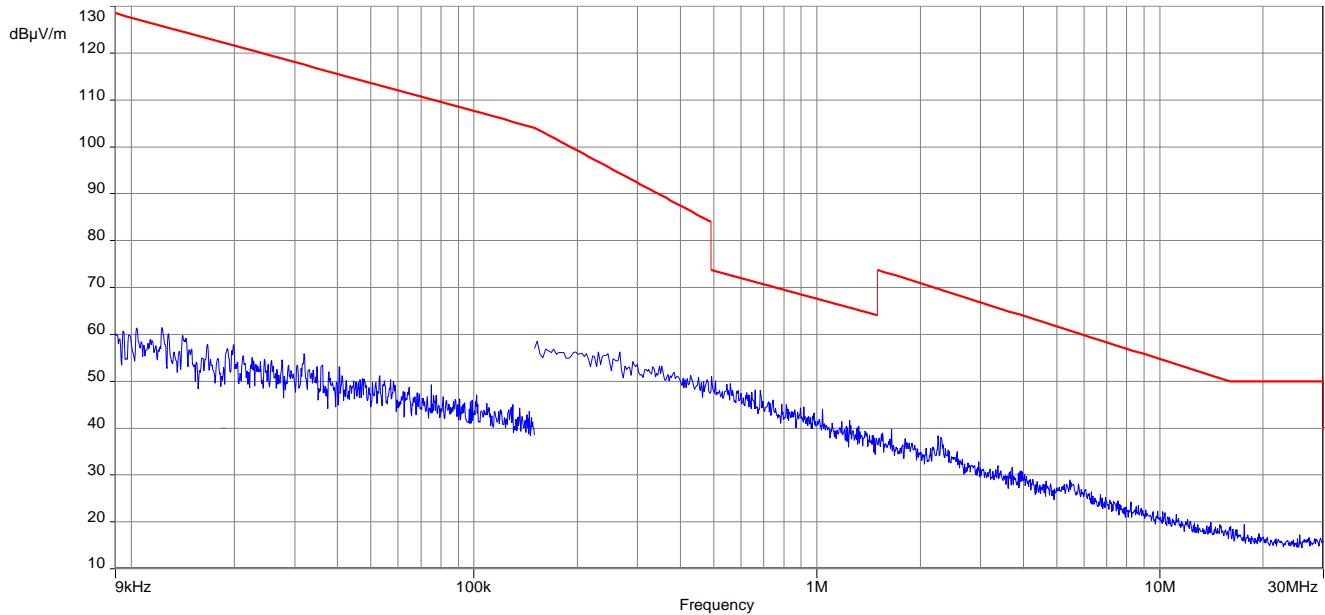

11.10 Spurious emissions radiated 30 MHz to 1 GHz

Description:


Measurement of the radiated spurious emissions in transmit mode. The EUT is set to single channel mode and the transmit frequencies are 2402 MHz, 2440 MHz and 2480 MHz.

Measurement parameters	
Detector	Peak / Quasi Peak
Sweep time	Auto
Resolution bandwidth	120 kHz
Video bandwidth	3 x RBW
Span	30 MHz to 1 GHz
Trace mode	Max hold
Measured modulation	GFSK
Test setup	See sub clause 7.1 A
Measurement uncertainty	See sub clause 8

Limits:


FCC	IC															
TX spurious emissions radiated																
In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).																
§15.209																
<table border="1"> <thead> <tr> <th>Frequency (MHz)</th> <th>Field strength (dBμV/m)</th> <th>Measurement distance</th> </tr> </thead> <tbody> <tr> <td>30 - 88</td> <td>30.0</td> <td>10</td> </tr> <tr> <td>88 - 216</td> <td>33.5</td> <td>10</td> </tr> <tr> <td>216 - 960</td> <td>36.0</td> <td>10</td> </tr> <tr> <td>Above 960</td> <td>54.0</td> <td>3</td> </tr> </tbody> </table>		Frequency (MHz)	Field strength (dB μ V/m)	Measurement distance	30 - 88	30.0	10	88 - 216	33.5	10	216 - 960	36.0	10	Above 960	54.0	3
Frequency (MHz)	Field strength (dB μ V/m)	Measurement distance														
30 - 88	30.0	10														
88 - 216	33.5	10														
216 - 960	36.0	10														
Above 960	54.0	3														

Plots: Transmit mode

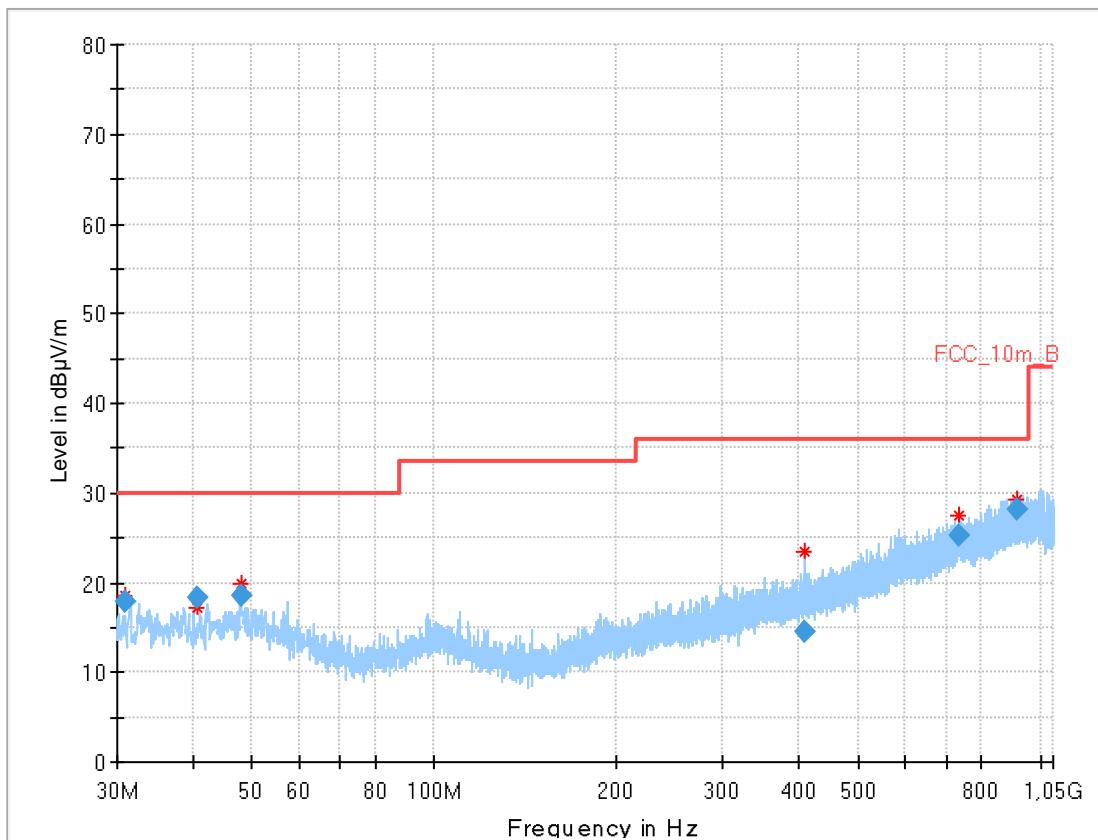Plot 1: 30 MHz to 1 GHz, TX mode, 2402 MHz, vertical & horizontal polarization, 1 Msps

Final results:

Frequency (MHz)	QuasiPeak (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
30.958	17.91	30.0	12.09	1000	120	101.0	H	248.0	13
40.631	18.40	30.0	11.60	1000	120	170.0	H	292.0	14
48.159	18.60	30.0	11.40	1000	120	98.0	V	2.0	15
407.715	14.47	36.0	21.53	1000	120	145.0	V	2.0	17
734.250	25.26	36.0	10.74	1000	120	170.0	H	68.0	22
912.478	28.07	36.0	7.93	1000	120	147.0	H	191.0	24

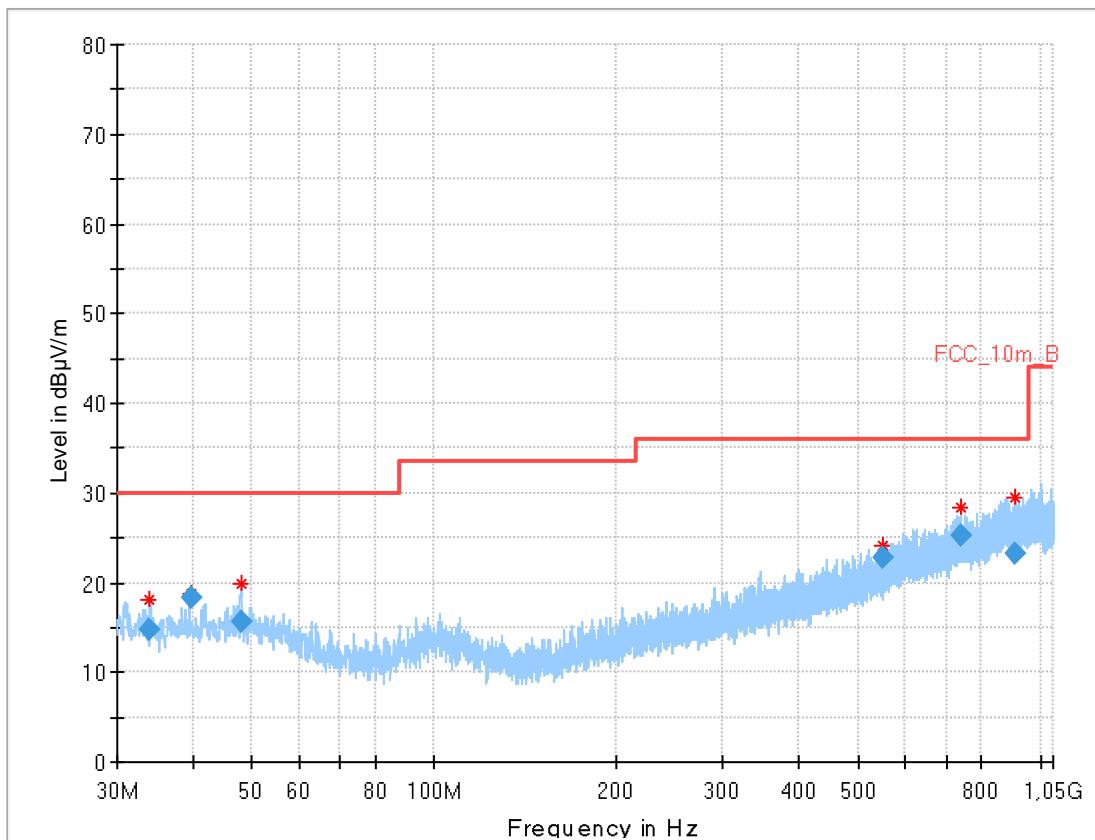
Plot 2: 30 MHz to 1 GHz, TX mode, 2440 MHz, vertical & horizontal polarization, 1 Msps



Final results:

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
33.995	14.66	30.0	15.34	1000	120	146.0	V	79.0	14
39.767	18.29	30.0	11.71	1000	120	100.0	H	-22.0	14
48.180	15.59	30.0	14.41	1000	120	170.0	V	292.0	15
549.410	22.79	36.0	13.21	1000	120	170.0	V	-22.0	19
738.643	25.35	36.0	10.65	1000	120	170.0	H	259.0	22
910.450	23.13	36.0	12.87	1000	120	170.0	V	281.0	24


Plot 3: 30 MHz to 1 GHz, TX mode, 2480 MHz, vertical & horizontal polarization, 1 Msps

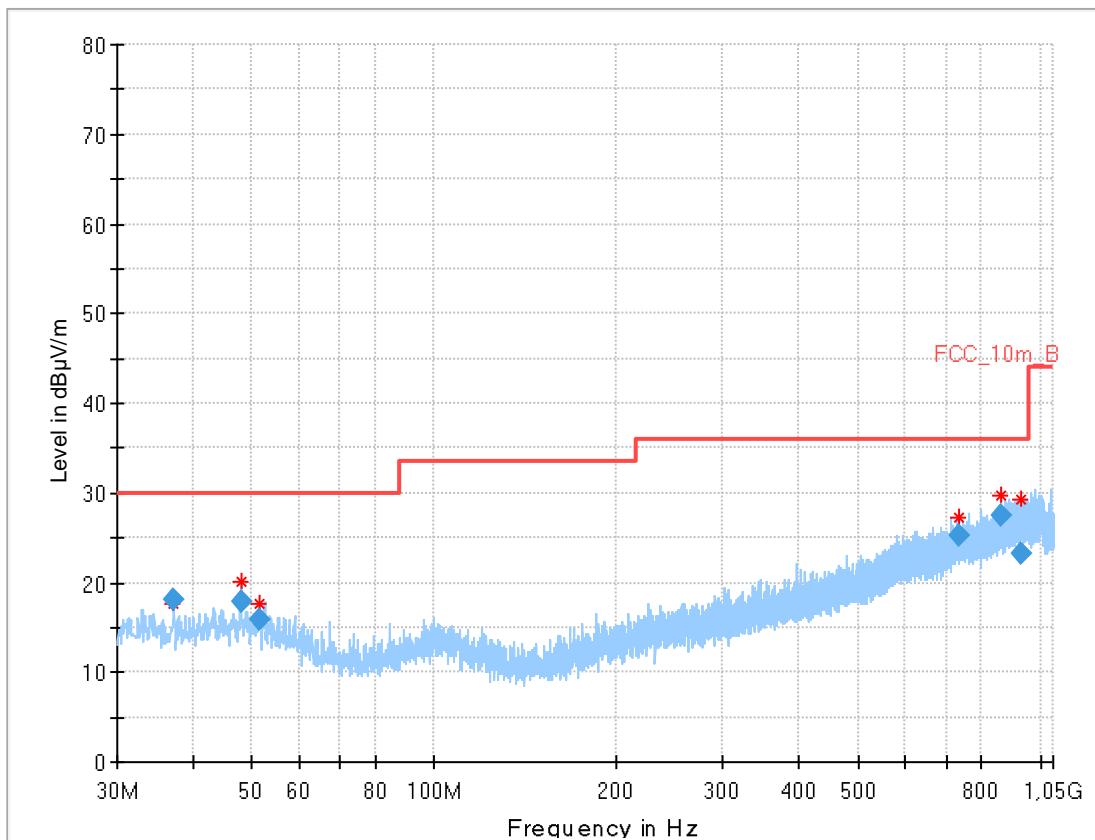

Final results:

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
37.249	18.21	30.0	11.79	1000	120	147.0	H	101.0	14
48.006	17.86	30.0	12.14	1000	120	146.0	V	169.0	15
51.690	15.91	30.0	14.09	1000	120	101.0	H	112.0	15
735.306	25.30	36.0	10.70	1000	120	170.0	H	248.0	22
861.070	27.46	36.0	8.54	1000	120	170.0	V	180.0	23
931.529	23.33	36.0	12.67	1000	120	170.0	H	71.0	24

Plots: Receiver mode

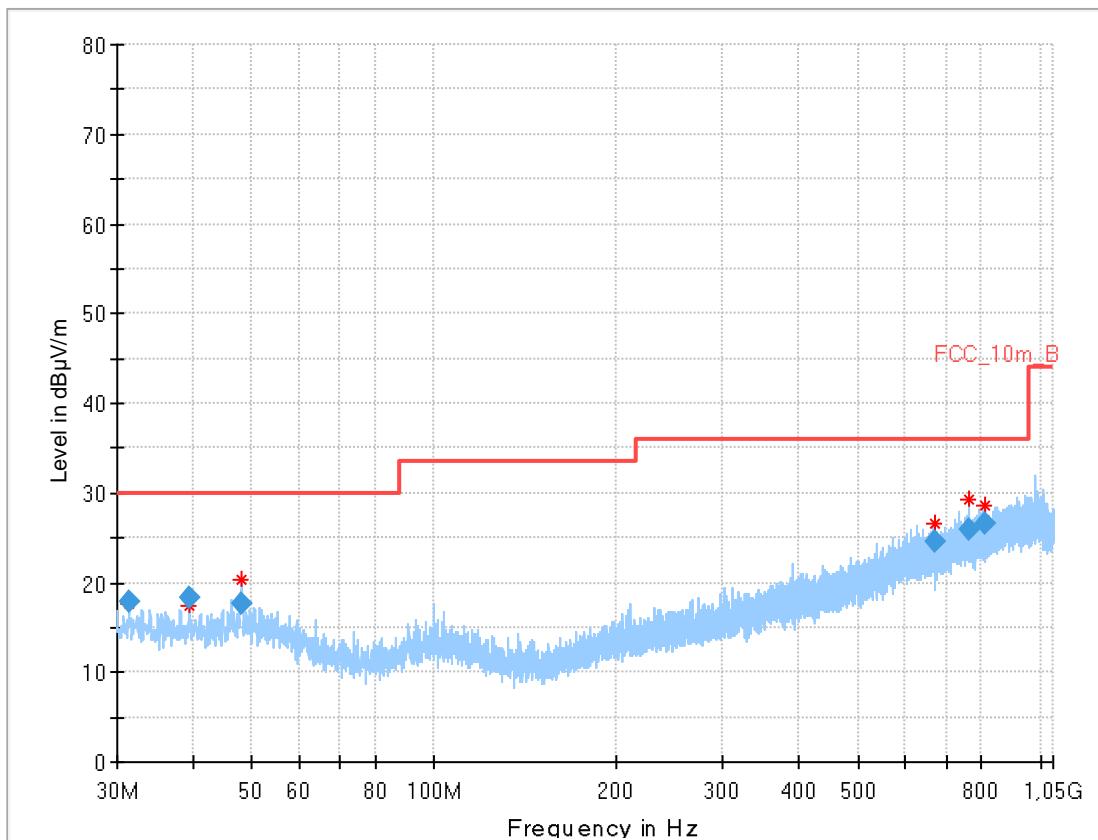Plot 1: 30 MHz to 1 GHz, RX / idle – mode, vertical & horizontal polarization

Final results:

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
31.413	17.86	30.0	12.14	1000	120	101.0	H	13.0	13
39.345	18.29	30.0	11.71	1000	120	98.0	V	202.0	14
47.975	17.72	30.0	12.28	1000	120	101.0	V	68.0	15
669.366	24.59	36.0	11.41	1000	120	170.0	V	202.0	21
760.834	25.85	36.0	10.15	1000	120	170.0	H	162.0	22
812.361	26.53	36.0	9.47	1000	120	98.0	H	-21.0	23

11.11 Spurious emissions radiated above 1 GHz

Description:

Measurement of the radiated spurious emissions in transmit mode. The EUT is set to single channel mode and the transmit frequencies are 2402 MHz, 2440 MHz and 2480 MHz.

Measurement parameters	
Detector	Peak / RMS
Sweep time	Auto
Resolution bandwidth	1 MHz
Video bandwidth	3 x RBW
Span	1 GHz to 26 GHz
Trace mode	Max hold
Measured modulation	GFSK
Test setup	See sub clause 7.2 A (1 GHz - 18 GHz) See sub clause 7.3 A (18 GHz - 26 GHz)
Measurement uncertainty	See sub clause 8

Limits:

FCC	IC									
TX spurious emissions radiated										
In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).										
§15.209										
<table border="1"> <thead> <tr> <th>Frequency (MHz)</th> <th>Field strength (dBμV/m)</th> <th>Measurement distance</th> </tr> </thead> <tbody> <tr> <td>Above 960</td> <td>54.0 (Average)</td> <td>3</td> </tr> <tr> <td>Above 960</td> <td>74.0 (Peak)</td> <td>3</td> </tr> </tbody> </table>		Frequency (MHz)	Field strength (dB μ V/m)	Measurement distance	Above 960	54.0 (Average)	3	Above 960	74.0 (Peak)	3
Frequency (MHz)	Field strength (dB μ V/m)	Measurement distance								
Above 960	54.0 (Average)	3								
Above 960	74.0 (Peak)	3								

Results: Transmitter mode, 1 Msps


TX spurious emissions radiated [dB μ V/m]								
2402 MHz			2440 MHz			2480 MHz		
F [MHz]	Detector	Level [dB μ V/m]	F [MHz]	Detector	Level [dB μ V/m]	F [MHz]	Detector	Level [dB μ V/m]
2274	Peak	50.2	2329	Peak	48.4	2352	Peak	50.5
	AVG	45.9		AVG	43.3		AVG	45.0
4804	Peak	46.7	4880	Peak	47.1	4960	Peak	47.5
	AVG	38.5		AVG	39.4		AVG	40.2
	Peak			Peak			Peak	
	AVG			AVG			AVG	

Results: Receiver mode


RX spurious emissions radiated [dB μ V/m]		
F [MHz]	Detector	Level [dB μ V/m]
All detected emissions are more than 20 dB below the limit.		
	Peak	
	AVG	

Note: The limit was recalculated with 20 dB / decade (Part 15.31) for all radiated spurious emissions 30 MHz to 1 GHz from 3 meter limit to a 10 meter distance. (40dB/decade for emissions < 30MHz)


Plots: Transmitter mode

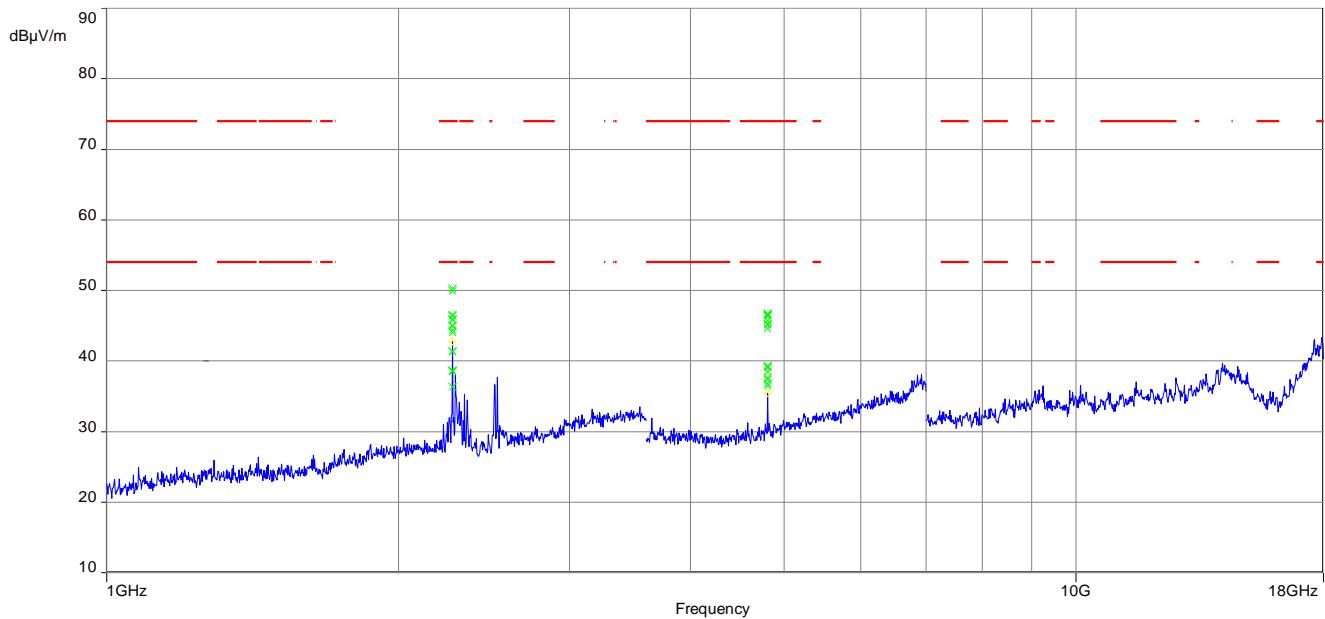Plot 1: 1 GHz to 18 GHz, TX mode, 2402 MHz, vertical & horizontal polarization, 1 Msps


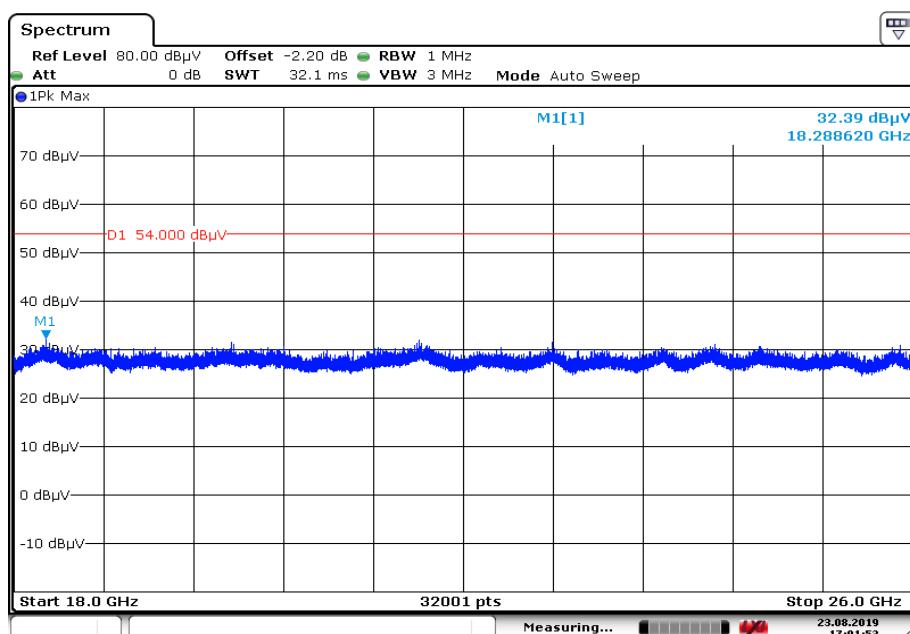
The carrier signal is notched with a 2.4 GHz band rejection filter.

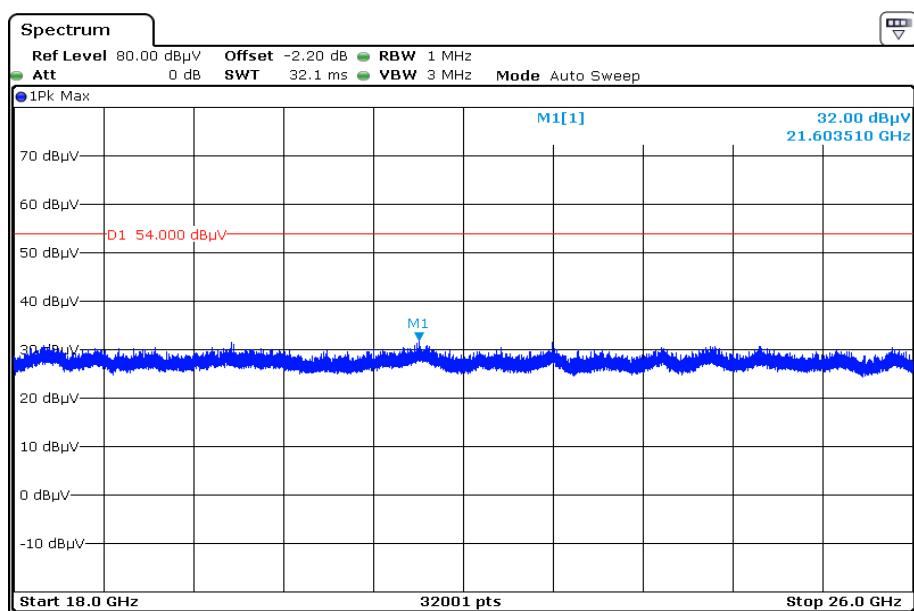
Plot 2: 18 GHz to 26 GHz, TX mode, 2402 MHz, vertical & horizontal polarization, 1 Msps


Date: 23 AUG 2019 17:01:22

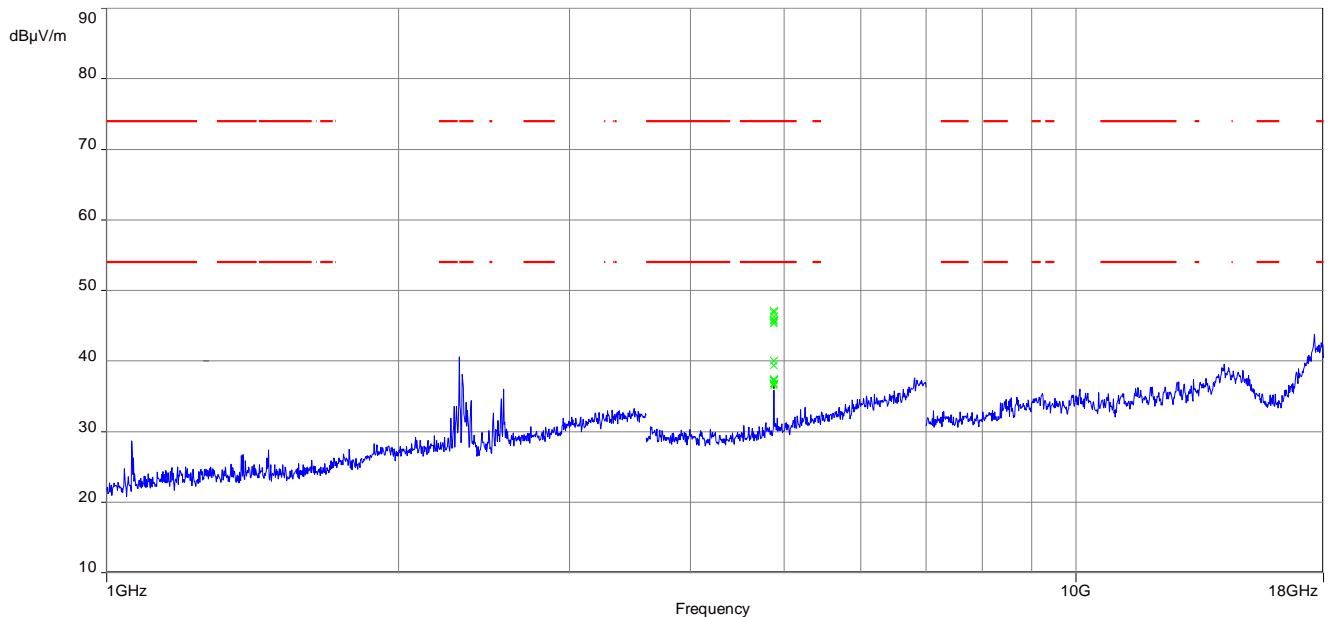
Plot 3: 1 GHz to 18 GHz, TX mode, 2440 MHz, vertical & horizontal polarization, 1 Msps

The carrier signal is notched with a 2.4 GHz band rejection filter.



Plot 4: 18 GHz to 26 GHz, TX mode, 2440 MHz, vertical & horizontal polarization, 1 Msps

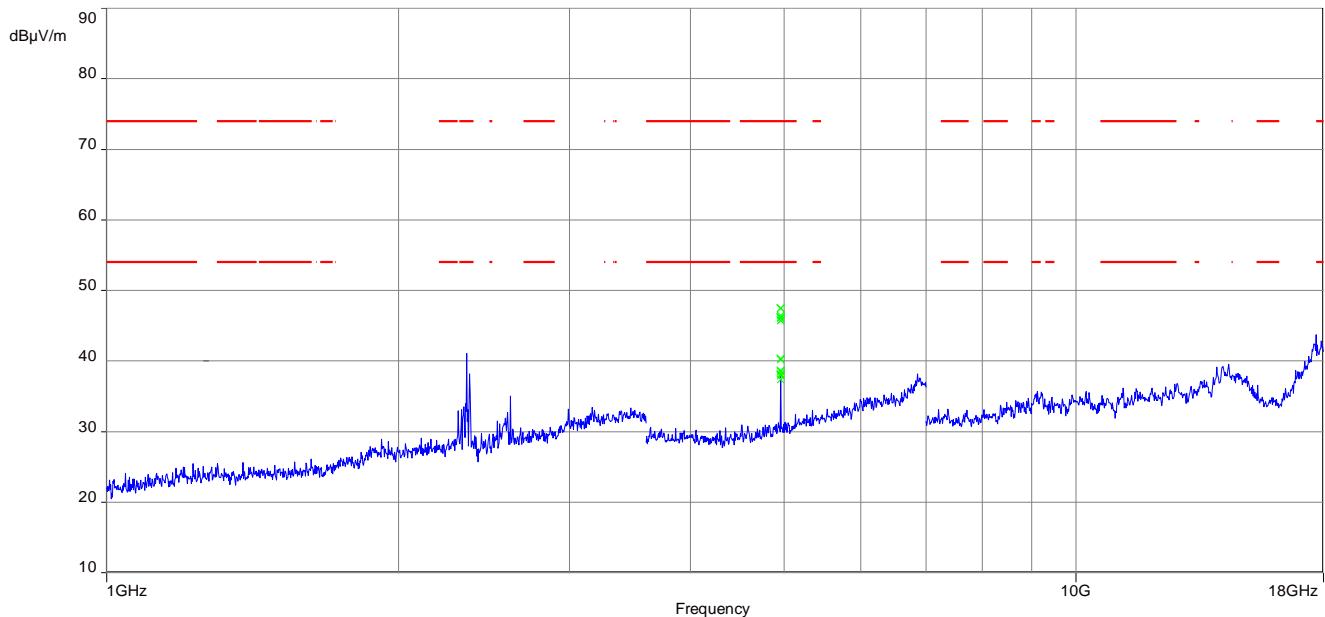Plot 5: 1 GHz to 18 GHz, TX mode, 2480 MHz, vertical & horizontal polarization, 1 Msps

The carrier signal is notched with a 2.4 GHz band rejection filter.

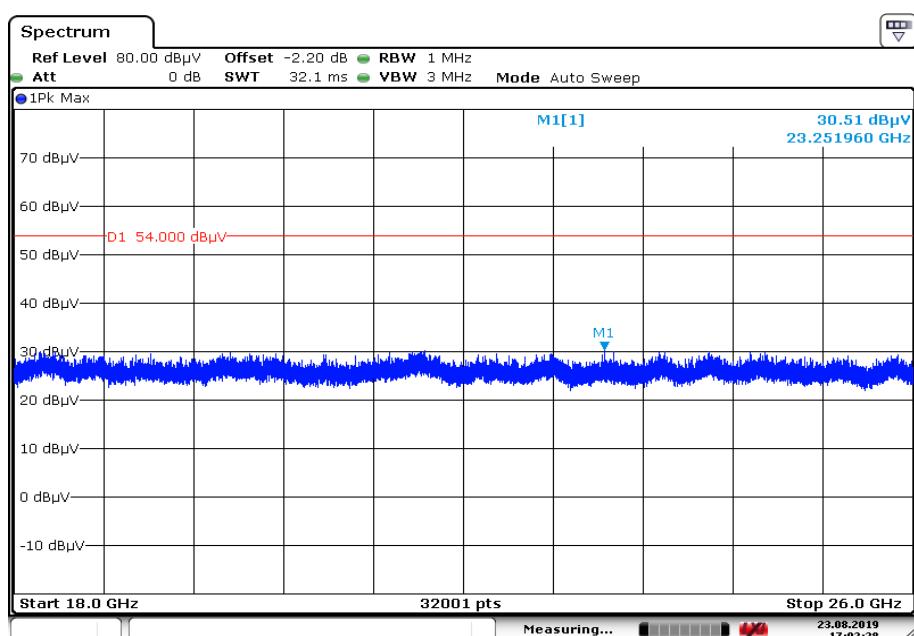Plot 6: 18 GHz to 26 GHz, TX mode, 2480 MHz, vertical & horizontal polarization, 1 Msps

Plots: Receiver mode

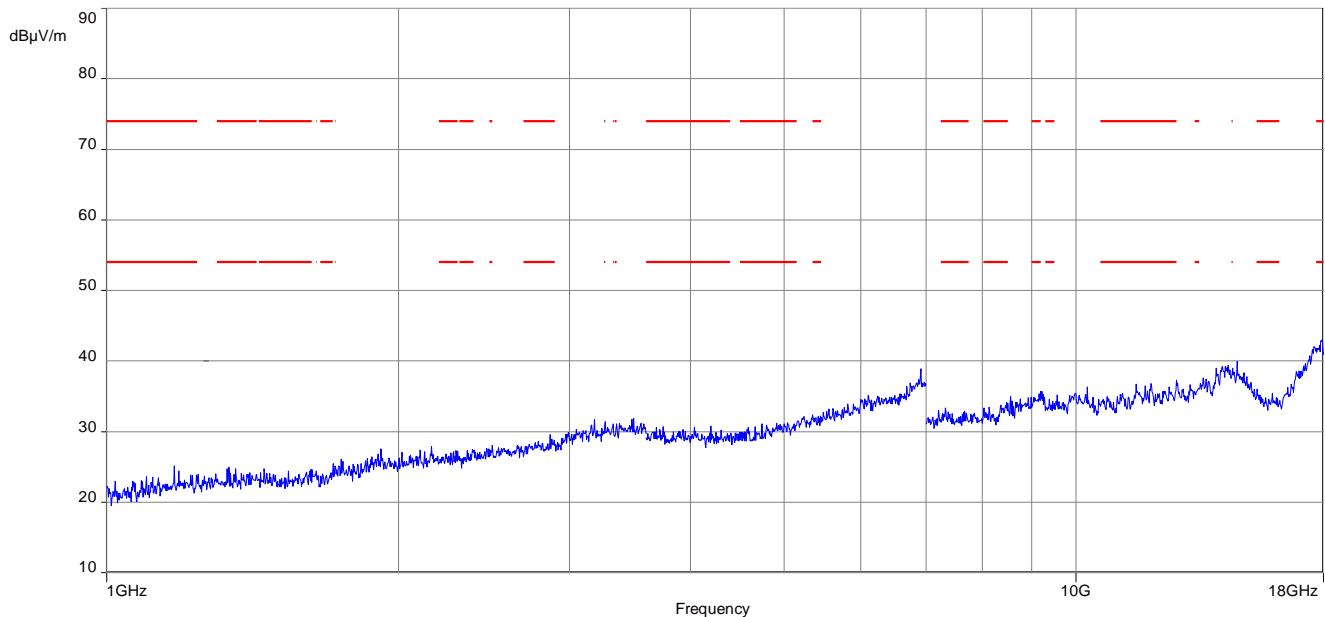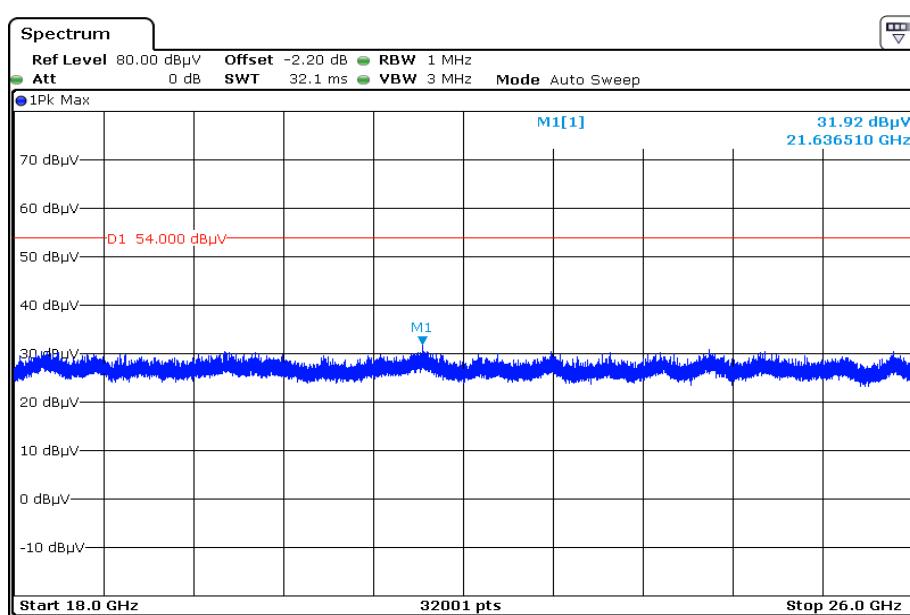Plot 1: 1 GHz to 18 GHz, RX / idle – mode, vertical & horizontal polarization

Plot 2: 18 GHz to 26 GHz, RX / idle – mode, vertical & horizontal polarization


Annex A Glossary

EUT	Equipment under test
DUT	Device under test
UUT	Unit under test
GUE	GNSS User Equipment
ETSI	European Telecommunications Standards Institute
EN	European Standard
FCC	Federal Communications Commission
FCC ID	Company Identifier at FCC
IC	Industry Canada
PMN	Product marketing name
HMN	Host marketing name
HVIN	Hardware version identification number
FVIN	Firmware version identification number
EMC	Electromagnetic Compatibility
HW	Hardware
SW	Software
Inv. No.	Inventory number
S/N or SN	Serial number
C	Compliant
NC	Not compliant
NA	Not applicable
NP	Not performed
PP	Positive peak
QP	Quasi peak
AVG	Average
OC	Operating channel
OCW	Operating channel bandwidth
OBW	Occupied bandwidth
OOB	Out of band
DFS	Dynamic frequency selection
CAC	Channel availability check
OP	Occupancy period
NOP	Non occupancy period
DC	Duty cycle
PER	Packet error rate
CW	Clean wave
MC	Modulated carrier
WLAN	Wireless local area network
RLAN	Radio local area network
DSSS	Dynamic sequence spread spectrum
OFDM	Orthogonal frequency division multiplexing
FHSS	Frequency hopping spread spectrum
GNSS	Global Navigation Satellite System
C/N₀	Carrier to noise-density ratio, expressed in dB-Hz

Annex B Document history

Version	Applied changes	Date of release
-/-	Initial release	2019-10-21

Annex C Accreditation Certificate – D-PL-12076-01-04

first page	last page
 <p>Deutsche Akkreditierungsstelle GmbH</p> <p>Entrusted according to Section 8 subsection 1 AkkStelleG in connection with Section 1 subsection 1 AkkStelleGBV Signatory to the Multilateral Agreements of EA, ILAC and IAF for Mutual Recognition</p> <p>Accreditation </p> <p>The Deutsche Akkreditierungsstelle GmbH attests that the testing laboratory CTC advanced GmbH Untertürkheimer Straße 6-10, 66117 Saarbrücken</p> <p>is competent under the terms of DIN EN ISO/IEC 17025:2005 to carry out tests in the following fields: Telecommunication (TC) and Electromagnetic Compatibility (EMC) for Canadian Standards</p> <p>The accreditation certificate shall only apply in connection with the notice of accreditation of 11.01.2019 with the accreditation number D-PL-12076-01 and is valid until 21.04.2021. It comprises the cover sheet, the reverse side of the cover sheet and the following annex with a total of 7 pages.</p> <p>Registration number of the certificate: D-PL-12076-01-04</p> <p>Frankfurt am Main, 11.01.2019 Dipl.-Biol. Uwe Zimmermann Head of Division</p> <p><i>[Handwritten signature of Uwe Zimmermann]</i></p> <p>See notes overleaf.</p>	<p>Deutsche Akkreditierungsstelle GmbH</p> <p>Office Berlin Spittelmarkt 10 10117 Berlin</p> <p>Office Frankfurt am Main Europa-Allee 52 60327 Frankfurt am Main</p> <p>Office Braunschweig Bundesallee 100 38116 Braunschweig</p> <p>The publication of extracts of the accreditation certificate is subject to the prior written approval by Deutsche Akkreditierungsstelle GmbH (DAkkS). Exempted is the unchanged form of separate disseminations of the cover sheet by the conformity assessment body mentioned overleaf.</p> <p>No impression shall be made that the accreditation also extends to fields beyond the scope of accreditation attested by DAkkS.</p> <p>The accreditation was granted pursuant to the Act on the Accreditation Body (AkkStelleG) of 31 July 2009 (Federal Law Gazette I p. 3625) and the Regulation (EC) No 765/2008 of the European Parliament and of the Council of 9 July 2008 setting out the requirements for accreditation and market surveillance relating to the marketing of products (Official Journal of the European Union L 218 of 9 July 2008, p. 30). DAkkS is a signatory to the Multilateral Agreements for Mutual Recognition of the European co-operation for Accreditation (EA), International Accreditation Forum (IAF) and International Laboratory Accreditation Cooperation (ILAC). The signatories to these agreements recognise each other's accreditations.</p> <p>The up-to-date state of membership can be retrieved from the following websites: EA: www.european-accreditation.org ILAC: www.ilac.org IAF: www.iaf.nu</p>

Note: The current certificate annex is published on the website (link see below) of the Accreditation Body DAkkS or may be received by CTC advanced GmbH on request

<https://www.dakks.de/as/ast/d/D-PL-12076-01-04.pdf>

Annex D Accreditation Certificate – D-PL-12076-01-05

first page	last page
 <p>Deutsche Akkreditierungsstelle GmbH</p> <p>Entrusted according to Section 8 subsection 1 AkkStelleG in connection with Section 1 subsection 1 AkkStelleGBV Signatory to the Multilateral Agreements of EA, ILAC and IAF for Mutual Recognition</p> <p>Accreditation </p> <p>The Deutsche Akkreditierungsstelle GmbH attests that the testing laboratory CTC advanced GmbH Untertürkheimer Straße 6-10, 66117 Saarbrücken is competent under the terms of DIN EN ISO/IEC 17025:2005 to carry out tests in the following fields: Telecommunication (FCC Requirements)</p> <p>The accreditation certificate shall only apply in connection with the notice of accreditation of 11.01.2019 with the accreditation number D-PL-12076-01 and is valid until 21.04.2021. It comprises the cover sheet, the reverse side of the cover sheet and the following annex with a total of 5 pages.</p> <p>Registration number of the certificate: D-PL-12076-01-05  Frankfurt am Main, 11.01.2019 Dipl. Ing. Uwe Zimmermann Head of Division</p> <p>See notes overleaf.</p>	<p>Deutsche Akkreditierungsstelle GmbH</p> <p>Office Berlin Spittelmarkt 10 10117 Berlin</p> <p>Office Frankfurt am Main Europa-Allee 52 60327 Frankfurt am Main</p> <p>Office Braunschweig Bundesallee 100 38116 Braunschweig</p> <p>The publication of extracts of the accreditation certificate is subject to the prior written approval by Deutsche Akkreditierungsstelle GmbH (DAkkS). Exempted is the unchanged form of separate disseminations of the cover sheet by the conformity assessment body mentioned overleaf.</p> <p>No impression shall be made that the accreditation also extends to fields beyond the scope of accreditation attested by DAkkS.</p> <p>The accreditation was granted pursuant to the Act on the Accreditation Body (AkkStelleG) of 31 July 2009 (Federal Law Gazette I p. 2625) and the Regulation (EC) No 765/2008 of the European Parliament and of the Council of 9 July 2008 setting out the requirements for accreditation and market surveillance relating to the marketing of products (Official Journal of the European Union L 218 of 9 July 2008, p. 30). DAkkS is a signatory to the Multilateral Agreements for Mutual Recognition of the European co-operation for Accreditation (EA), International Accreditation Forum (IAF) and International Laboratory Accreditation Cooperation (ILAC). The signatories to these agreements recognise each other's accreditations.</p> <p>The up-to-date state of membership can be retrieved from the following websites: EA: www.european-accreditation.org ILAC: www.ilac.org IAF: www.iaf.nu</p>

Note: The current certificate annex is published on the website (link see below) of the Accreditation Body DAkkS or may be received by CTC advanced GmbH on request

<https://www.dakks.de/as/ast/d/D-PL-12076-01-05.pdf>

Annex E Table of contents of the used standard

contents of FCC Title 47 / Volume I / Chapter I / Part 15 / Subpart C / §15.247 (Intentional Radiators)

§15.247	(a) (1)	Not applicable
§15.247	(a) (1) (i)	Not applicable
§15.247	(a) (1) (ii)	Not applicable
§15.247	(a) (1) (iii)	Not applicable
§15.247	(2)	Compliant
§15.247	(b) (1)	Not applicable
§15.247	(b) (2)	Not applicable
§15.247	(b) (3)	Compliant
§15.247	(b) (4)	Compliant
§15.247	(c)	Not applicable
§15.247	(d)	Compliant
§15.247	(e)	Compliant
§15.247	(f)	Not applicable
§15.247	(g)	Not applicable
§15.247	(h)	Not applicable
§15.247	(i)	Not applicable

END OF TEST REPORT