

S

T

S

L

A

B



## RADIO TEST REPORT

Report No: STS1906134W07

Issued for

Shenzhen AEE Aviation Technology Co.,Ltd.

AEE Hi-Tech Park,Tangtou Crossroads,Songbai Road,Shiyan  
Town,Bao' an District Shenzhen,P.R.C.

<b>Product Name:</b>	MACH4 Y12
<b>Brand Name:</b>	AEE
<b>Model Name:</b>	Y12
<b>Series Model:</b>	N/A
<b>FCC ID:</b>	2AGZGY12001
<b>Test Standard:</b>	FCC Part 15.247

Any reproduction of this document must be done in full. No single part of this document may be reproduced without permission from STS, All Test Data Presented in this report is only applicable to presented Test sample.

Shenzhen STS Test Services Co., Ltd.

1/F., Building B, Zhuoke Science Park, No.190, Chongqing Road,  
Fuyong Street, Bao'an District, Shenzhen, Guangdong, China

TEL: +86-755 3688 6288 FAX: +86-755 3688 6277 E-mail: sts@stsapp.com



**TEST RESULT CERTIFICATION**

Applicant's Name .....: Shenzhen AEE Aviation Technology Co.,Ltd.  
Address .....: AEE Hi-Tech Park,Tangtou Crossroads,Songbai Road,Shiyan Town,Bao' an District Shenzhen,P.R.C.  
Manufacture's Name .....: Shenzhen AEE Aviation Technology Co.,Ltd.  
Address .....: AEE Hi-Tech Park,Tangtou Crossroads,Songbai Road,Shiyan Town,Bao' an District Shenzhen,P.R.C.

**Product Description**

Product Name .....: MACH4 Y12  
Brand Name .....: AEE  
Model Name .....: Y12  
Series Model .....: N/A  
Test Standards .....: FCC Part15.247  
Test Procedure .....: ANSI C63.10-2013

This device described above has been tested by STS, the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.  
This report shall not be reproduced except in full, without the written approval of STS, this document may be altered or revised by STS, personal only, and shall be noted in the revision of the document..

**Date of Test.....:**

Date (s) of performance of tests.: 11 June 2019 ~ 30 Oct. 2019

Date of Issue .....: 07 Nov. 2019

Test Result .....: Pass

Testing Engineer :

(Chris Chen)

Technical Manager :

(Sunday Hu)

Authorized Signatory :

(Vita Li)





Table of Contents	Page
<b>1. SUMMARY OF TEST RESULTS</b>	<b>6</b>
1.1 TEST FACTORY	7
1.2 MEASUREMENT UNCERTAINTY	7
<b>2. GENERAL INFORMATION</b>	<b>8</b>
2.1 GENERAL DESCRIPTION OF THE EUT	8
2.2 DESCRIPTION OF THE TEST MODES	10
2.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	11
2.4 DESCRIPTION OF NECESSARY ACCESSORIES AND SUPPORT UNITS	12
2.5 EQUIPMENTS LIST	13
<b>3. EMC EMISSION TEST</b>	<b>14</b>
3.1 CONDUCTED EMISSION MEASUREMENT	14
3.2 RADIATED EMISSION MEASUREMENT	18
<b>4. CONDUCTED SPURIOUS &amp; BAND EDGE EMISSION</b>	<b>29</b>
4.1 LIMIT	29
4.2 TEST PROCEDURE	29
4.3 TEST SETUP	29
4.4 EUT OPERATION CONDITIONS	29
4.5 TEST RESULTS	30
<b>5. NUMBER OF HOPPING CHANNEL</b>	<b>35</b>
5.1 LIMIT	35
5.2 TEST PROCEDURE	35
5.3 TEST SETUP	35
5.4 EUT OPERATION CONDITIONS	35
5.5 TEST RESULTS	36
<b>6. AVERAGE TIME OF OCCUPANCY</b>	<b>37</b>
6.1 LIMIT	37
6.2 TEST PROCEDURE	37
6.3 TEST SETUP	37
6.4 EUT OPERATION CONDITIONS	37
6.5 TEST RESULTS	38
<b>7. HOPPING CHANNEL SEPARATION MEASUREMEN</b>	<b>42</b>
7.1 LIMIT	42
7.2 TEST PROCEDURE	42



Table of Contents	Page
7.3 TEST SETUP	42
7.4 EUT OPERATION CONDITIONS	42
7.5 TEST RESULTS	43
<b>8. BANDWIDTH TEST</b>	<b>45</b>
8.1 LIMIT	45
8.2 TEST PROCEDURE	45
8.3 TEST SETUP	45
8.4 EUT OPERATION CONDITIONS	45
8.5 TEST RESULTS	46
<b>9. OUTPUT POWER TEST</b>	<b>48</b>
9.1 LIMIT	48
9.2 TEST PROCEDURE	48
9.3 TEST SETUP	48
9.4 EUT OPERATION CONDITIONS	48
9.5 TEST RESULTS	49
<b>10. ANTENNA REQUIREMENT</b>	<b>50</b>
10.1 STANDARD REQUIREMENT	50
10.2 EUT ANTENNA	50

**Revision History**

Rev.	Issue Date	Report NO.	Effect Page	Contents
00	07 Nov. 2019	STS1906134W07	ALL	Initial Issue





## 1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

KDB 558074 D01 15.247 Meas Guidance v05r02

FCC Part 15.247, Subpart C			
Standard Section	Test Item	Judgment	Remark
15.207	Conducted Emission	PASS	--
15.247(a)(1)	Hopping Channel Separation	PASS	--
15.247(a)(1)&(b)(1)	Output Power	PASS	--
15.209	Radiated Spurious Emission	PASS	--
15.247(d)	Conducted Spurious & Band Edge Emission	PASS	--
15.247(a)(iii)	Number of Hopping Frequency	PASS	--
15.247(a)(iii)	Dwell Time	PASS	--
15.247(a)(1)	Bandwidth	PASS	--
15.205	Restricted bands of operation	PASS	--
Part 15.247(d)/part 15.209(a)	Band Edge Emission	PASS	--
15.203	Antenna Requirement	PASS	--

### NOTE:

(1) "N/A" denotes test is not applicable in this Test Report

(2) All tests are according to ANSI C63.10-2013



## 1.1 TEST FACTORY

SHENZHEN STS TEST SERVICES CO., LTD

Add. : A 1/F, Building B, Zhuoke Science Park, No.190 Chongqing Road, HepingShequ, Fuyong Sub-District, Bao'an District, Shenzhen, Guang Dong, China

FCC test Firm Registration Number: 625569

IC test Firm Registration Number: 12108A

A2LA Certificate No.: 4338.01

## 1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement  $y \pm U$ , where expanded uncertainty  $U$  is based on a standard uncertainty multiplied by a coverage factor of  $k=2$ , providing a level of confidence of approximately **95 %**.

No.	Item	Uncertainty
1	RF output power, conducted	$\pm 0.71\text{dB}$
2	Unwanted Emissions, conducted	$\pm 0.63\text{dB}$
3	All emissions, radiated 30-200MHz	$\pm 3.43\text{dB}$
4	All emissions, radiated 200MHz-1GHz	$\pm 3.57\text{dB}$
5	All emissions, radiated >1G	$\pm 4.13\text{dB}$
6	Conducted Emission (9KHz-150KHz)	$\pm 3.18\text{dB}$
7	Conducted Emission (150KHz-30MHz)	$\pm 2.70\text{dB}$



## 2. GENERAL INFORMATION

### 2.1 GENERAL DESCRIPTION OF THE EUT

Product Name	MACH4 Y12
Trade Name	AEE
Model Name	Y12
Series Model	N/A
Model Difference	N/A
Channel List	Please refer to the Note 2.
Frequency	2405 – 2473 MHz
Modulation	64QAM, 16QAM, QPSK, BPSK
Adapter	Input: 100V~240VAC Output: 15V
Battery	Rated Voltage: 11.1V Charge Limit: 12.6V Capacity: 5600mah
Hardware version number	V1.7
Software version number	1.0
Connecting I/O Port(s)	Please refer to the User's Manual

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.





2.

Channel List					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
01	2405	07	2429	13	2453
02	2409	08	2433	14	2457
03	2413	09	2437	15	2461
04	2417	10	2441	16	2465
05	2421	11	2445	17	2469
06	2425	12	2449	18	2473

3. Table for Filed Antenna

Ant.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)	NOTE
1	AEE	Y12	Dipole	N/A	3dBi	BT Antenna





## 2.2 DESCRIPTION OF THE TEST MODES

To investigate the maximum EMI emission characteristics generated from EUT, the test system was pre-scanning tested based on the consideration of following EUT operation mode or test configuration mode which possibly have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Worst Mode	Description	Data Rate
Mode 1	TX CH01	1Mbps
Mode 2	TX CH10	1Mbps
Mode 3	TX CH18	1Mbps

Note:

(1) The measurements are performed at all Bit Rate of Transmitter, the worst data was reported

(2) We have been tested for all available U.S. voltage and frequencies (For 120V, 50/60Hz and 240V, 50/60Hz) for which the device is capable of operation, and the worst case of 120V/ 60Hz is shown in the report


For AC Conducted Emission

Test Case	
AC Conducted Emission	Mode 4: Keeping TX


### 2.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

During testing channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product power parameters of FHSS

#### Radiated Spurious Emission Test

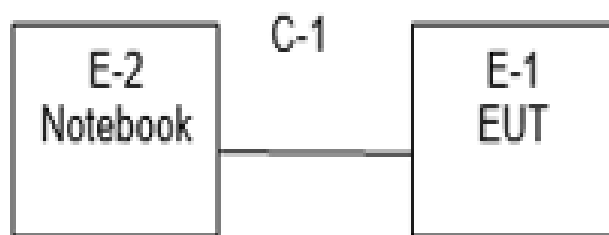

#### Conducted Emission Test





## 2.4 DESCRIPTION OF NECESSARY ACCESSORIES AND SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

### Necessary accessories

Item	Equipment	Mfr/Brand	Model/Type No.	Serial No.	Note
E-3	Adapter	N/A	KZ1503000	N/A	N/A
C-2	DC Cable	N/A	110cm	N/A	N/A

### Support units

Item	Equipment	Mfr/Brand	Model/Type No.	Serial No.	Note
E-2	Notebook	DELL	VOSTRO.3800	N/A	N/A
C-1	USB Cable	N/A	100cm	N/A	N/A

### Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.
- (3) “YES” is means “shielded” “with core”; “NO” is means “unshielded” “without core”.



## 2.5 EQUIPMENTS LIST

### Radiation Test equipment

Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
Test Receiver	R&S	ESCI	101427	2018.10.13, 2019.7.29	2019.10.12, 2020.7.28
Signal Analyzer	Agilent	N9020A	MY51110105	2019.03.02	2020.03.01
Active loop Antenna	ZHINAN	ZN30900C	16035	2018.03.11	2021.03.10
Bilog Antenna	TESEQ	CBL6111D	34678	2017.11.02	2020.11.1
Horn Antenna	SCHWARZBECK	BBHA 9120D(1201)	9120D-1343	2018.10.19	2021.10.18
SHF-EHF Horn Antenna (18G-40GHz)	A-INFO	LB-180400-KF	J211020657	2018.03.11	2021.03.10
Pre-Amplifier(0.1M-3G Hz)	EM	EM330	060665	2018.10.13, 2019.10.9	2019.10.12, 2020.10.8
Pre-Amplifier (1G-18GHz)	SKET	LNPA-01018G-45	SK201808090 1	2018.10.13, 2019.10.12	2019.10.12, 2020.10.11
Temperature & Humidity	HH660	Mieo	N/A	2018.10.11, 2019.10.09	2019.10.10, 2020.10.08
turn table	EM	SC100_1	60531	N/A	N/A
Antenna mast	EM	SC100	N/A	N/A	N/A
Test SW	FARAD	EZ-EMC(Ver.STSLAB-03A1 RE)			

### Conduction Test equipment

Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
Test Receiver	R&S	ESCI	101427	2018.10.13, 2019.7.29	2019.10.12, 2020.7.28
LISN	R&S	ENV216	101242	2018.10.11, 2019.10.09	2019.10.10, 2020.10.08
LISN	EMCO	3810/2NM	23625	2018.10.11, 2019.10.09	2019.10.10, 2020.10.08
Temperature & Humidity	HH660	Mieo	N/A	2018.10.11, 2019.10.09	2019.10.10, 2020.10.08
Test SW	FARAD	EZ-EMC(Ver.STSLAB-03A1 CE)			

### RF Connected Test

Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
USB RF power sensor	DARE	RPR3006W	15I00041SNO03	2018.10.13, 2019.10.9	2019.10.12, 2020.10.8
Signal Analyzer	Agilent	N9020A	MY49100060	2018.10.13, 2019.10.9	2019.10.12, 2020.10.8
Temperature & Humidity	HH660	Mieo	N/A	2018.10.11, 2019.10.09	2019.10.10, 2020.10.08
Test SW	FARAD	LZ-RF /LzRf-3A3			



### 3. EMC EMISSION TEST

#### 3.1 CONDUCTED EMISSION MEASUREMENT

##### 3.1.1 POWER LINE CONDUCTED EMISSION LIMITS

Operating frequency band. In case the emission fall within the restricted band specified on Part 207(a) limit in the table below has to be followed.

FREQUENCY (MHz)	Conducted Emissionlimit (dBuV)	
	Quasi-peak	Average
0.15 -0.5	66 - 56 *	56 - 46 *
0.50 -5.0	56.00	46.00
5.0 -30.0	60.00	50.00

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " \* " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.


The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

### 3.1.2 TEST PROCEDURE

- The EUT was 0.8 meters from the horizontal ground plane and 0.4 meters from the vertical ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- LISN at least 80 cm from nearest part of EUT chassis.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

### 3.1.3 TEST SETUP

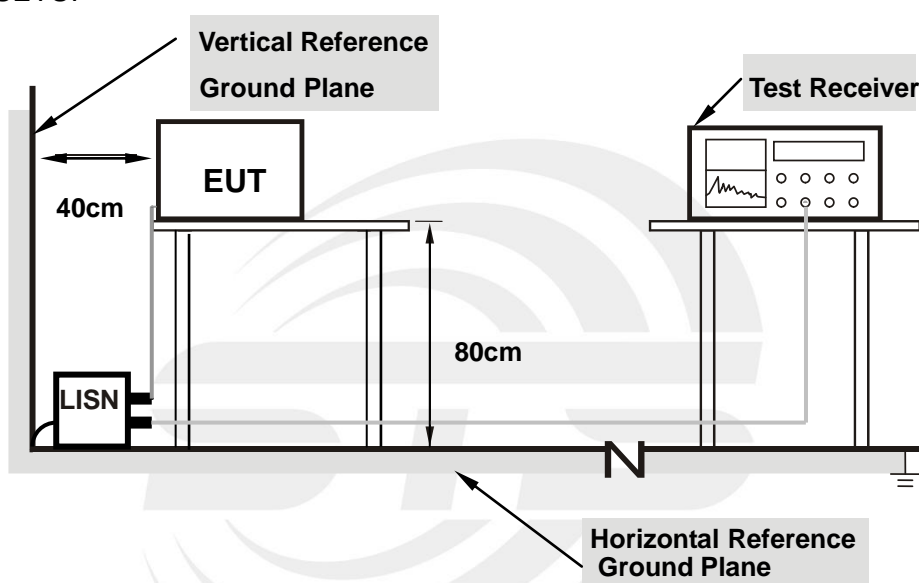

**Note: 1.Support units were connected to second LISN.**

**2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes**

### 3.1.4 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.



## 3.1.5 TEST RESULT

Temperature:	26(C)	Relative Humidity:	60%RH
Test Voltage:	AC 120V/60Hz	Phase:	L
Test Mode:	Mode 4		


No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	Factor(dB)	(dBuV)	(dBuV)	(dB)	
1	0.1500	36.94	19.66	56.60	66.00	-9.40	QP
2	0.1500	5.09	19.66	24.75	56.00	-31.25	AVG
3	0.1900	31.54	19.65	51.19	64.04	-12.85	QP
4	0.1900	1.33	19.65	20.98	54.04	-33.06	AVG
5	0.4260	23.61	19.69	43.30	57.33	-14.03	QP
6	0.4260	8.12	19.69	27.81	47.33	-19.52	AVG
7	1.0820	20.83	19.50	40.33	56.00	-15.67	QP
8	1.0820	5.78	19.50	25.28	46.00	-20.72	AVG
9	6.3260	19.24	19.31	38.55	60.00	-21.45	QP
10	6.3260	7.19	19.31	26.50	50.00	-23.50	AVG
11	23.7260	20.49	20.27	40.76	60.00	-19.24	QP
12	23.7260	1.26	20.27	21.53	50.00	-28.47	AVG

Remark:

1. All readings are Quasi-Peak and Average values.

2. Margin = Result (Result = Reading + Factor) - Limit

100.0 dBuV

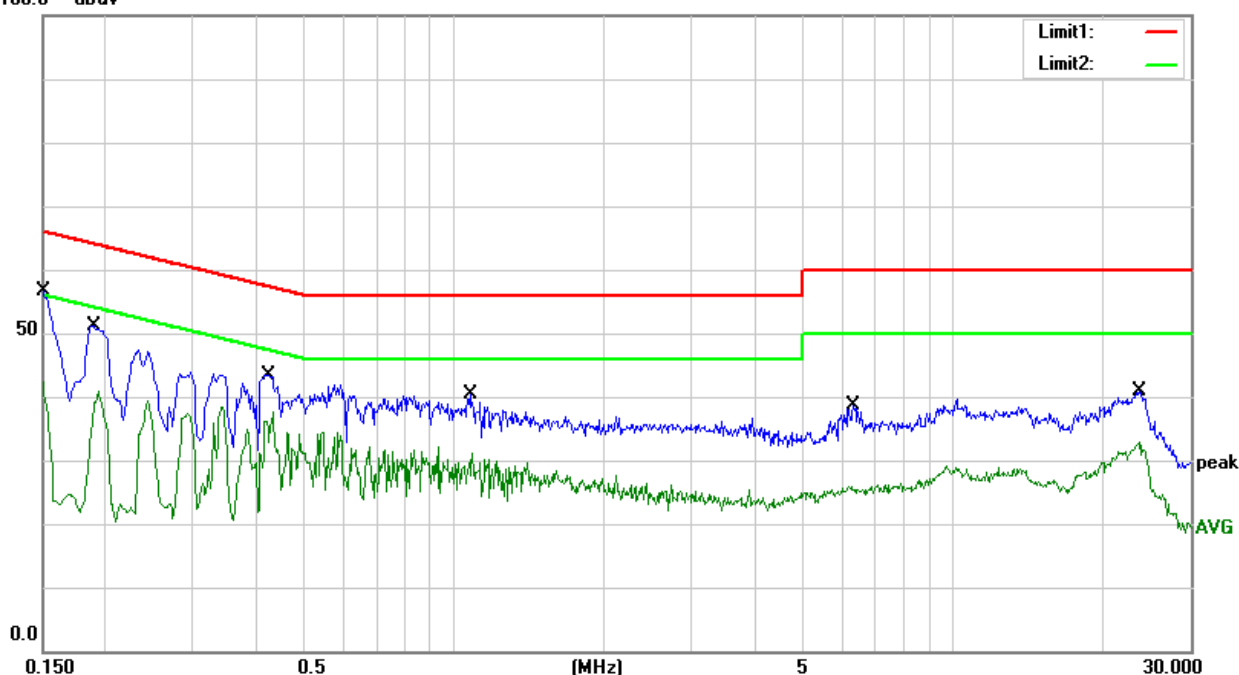






Temperature:	26(C)	Relative Humidity:	60%RH
Test Voltage:	AC 120V/60Hz	Phase:	N
Test Mode:	Mode 4		

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	Factor(dB)	(dBuV)	(dBuV)	(dB)	
1	0.1500	30.61	19.61	50.22	66.00	-15.78	QP
2	0.1500	4.47	19.61	24.08	56.00	-31.92	AVG
3	0.1860	30.01	19.64	49.65	64.21	-14.56	QP
4	0.1860	4.99	19.64	24.63	54.21	-29.58	AVG
5	0.2380	27.16	19.59	46.75	62.17	-15.42	QP
6	0.2380	9.55	19.59	29.14	52.17	-23.03	AVG
7	3.5980	23.27	19.43	42.70	56.00	-13.30	QP
8	3.5980	4.50	19.43	23.93	46.00	-22.07	AVG
9	6.4140	21.68	19.32	41.00	60.00	-19.00	QP
10	6.4140	8.54	19.32	27.86	50.00	-22.14	AVG
11	23.8180	22.92	20.27	43.19	60.00	-16.81	QP
12	23.8180	0.71	20.27	20.98	50.00	-29.02	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Margin = Result (Result = Reading + Factor )-Limit

100.0 dBuV

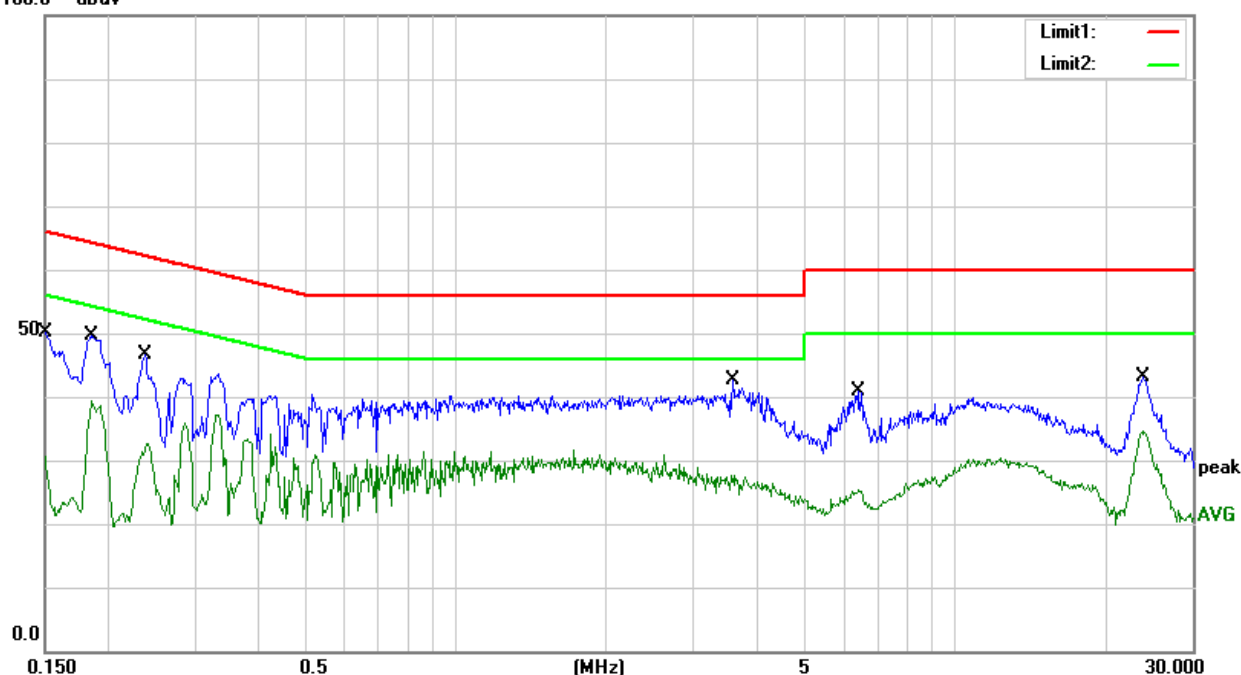



### 3.2 RADIATED EMISSION MEASUREMENT

#### 3.2.1 RADIATED EMISSION LIMITS

In any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the Restricted band specified on Part15.205(a)&209(a) limit in the table and according to ANSI C63.10-2013 below has to be followed

#### LIMITS OF RADIATED EMISSION MEASUREMENT (0.009MHz - 1000MHz)

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

#### LIMITS OF RADIATED EMISSION MEASUREMENT (1GHz-25 GHz)

FREQUENCY (MHz)	(dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

#### LIMITS OF RESTRICTED FREQUENCY BANDS

FREQUENCY (MHz)	FREQUENCY (MHz)	FREQUENCY (MHz)	FREQUENCY (GHz)
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	Above 38.6
13.36-13.41			



## For Radiated Emission

Spectrum Parameter	Setting
Attenuation	Auto
Detector	Peak/AV
Start Frequency	1000 MHz(Peak/AV)
Stop Frequency	10th carrier hamonic(Peak/AV)
RB / VB (emission in restricted band)	PK=1MHz / 1MHz, AV=1 MHz /10 Hz

## For Band edge

Spectrum Parameter	Setting
Detector	Peak/AV
Start/Stop Frequency	Lower Band Edge: 2300 to 2403 MHz Upper Band Edge: 2479 to 2500 MHz
RB / VB (emission in restricted band)	PK=1MHz / 1MHz, AV=1 MHz / 10 Hz

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~90kHz / RB 200Hz for PK & AV
Start ~ Stop Frequency	90kHz~110kHz / RB 200Hz for QP
Start ~ Stop Frequency	110kHz~490kHz / RB 200Hz for PK & AV
Start ~ Stop Frequency	490kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

## 3.2.2 TEST PROCEDURE

- The measuring distance of at 3 m shall be used for measurements at frequency 0.009MHz up to 1GHz, and above 1GHz.
- The EUT was placed on the top of a rotating table 0.8 meters (above 1GHz is 1.5 m) above the ground at a 3 meter anechoic chamber test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- The height of the equipment shall be 0.8 m(above 1GHz is 1.5 m); the height of the test antenna shall vary between 1 m to 4 m. horizontal and vertical polarizations of the antenna are set to make the measurement.
- The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then QuasiPeak detector mode re-measured.
- If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

Note:


Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

## 3.2.3 DEVIATION FROM TEST STANDARD


No deviation

### 3.2.4 TESTSETUP


#### (A) Radiated Emission Test-Up Frequency Below 30MHz

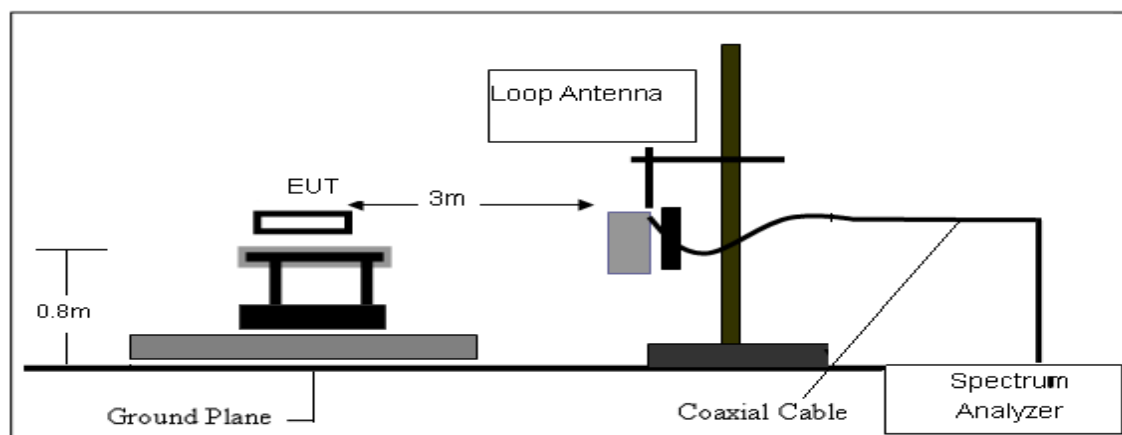

#### (B) Radiated Emission Test-Up Frequency 30MHz~1GHz

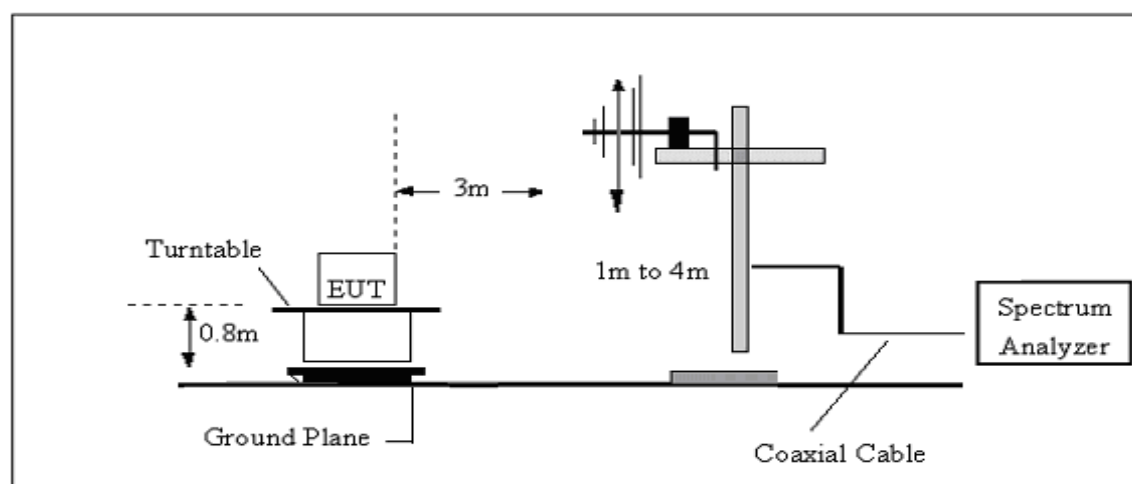

#### (C) Radiated Emission Test-Up Frequency Above 1GHz

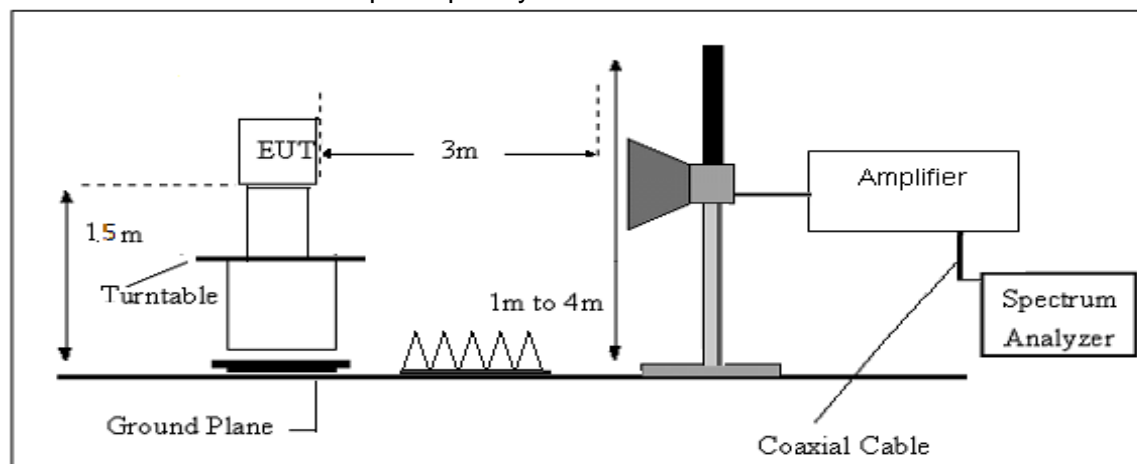

### 3.2.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.



### 3.2.6 FIELD STRENGTH CALCULATION

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor (if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CL - AG$$

Where

FS = Field Strength

CL = Cable Attenuation Factor (Cable Loss)

RA = Reading Amplitude

AG = Amplifier Gain

AF = Antenna Factor

For example

Frequency	FS	RA	AF	CL	AG	Factor
(MHz)	(dBμV/m)	(dBμV/m)	(dB)	(dB)	(dB)	(dB)
300	40	58.1	12.2	1.6	31.9	-18.1

$$\text{Factor} = \text{AF} + \text{CL} - \text{AG}$$





## 3.2.7 TEST RESULTS

(9KHz-30MHz)

Temperature:	25.1(C)	Relative Humidity:	59%RH
Test Voltage:	DC 11.1V	Test Mode:	TX Mode


Freq.	Reading	Limit	Margin	State	Test Result
(MHz)	(dBuV/m)	(dBuV/m)	(dB)	P/F	
--	--	--	--	--	PASS
--	--	--	--	--	PASS

## Note:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Distance extrapolation factor =  $40 \log (\text{specific distance/test distance})$ (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor.

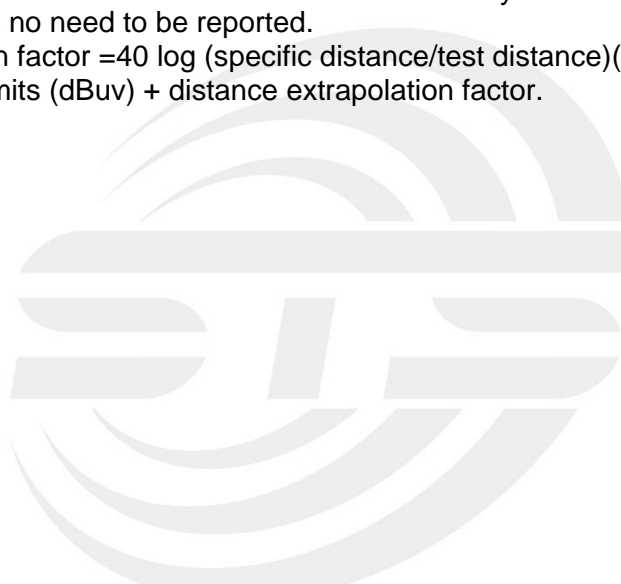




(30MHz-1000MHz)

Temperature:	25.1(C)	Relative Humidity:	59%RH
Test Voltage:	DC 11.1V	Phase:	Horizontal
Test Mode:	Mode 1/2/3(Mode 1 worst mode)		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	151.2500	30.90	-18.55	12.35	43.50	-31.15	QP
2	318.0900	44.38	-14.09	30.29	46.00	-15.71	QP
3	368.5300	43.65	-12.55	31.10	46.00	-14.90	QP
4	759.4400	29.21	-2.16	27.05	46.00	-18.95	QP
5	844.8000	29.99	-0.53	29.46	46.00	-16.54	QP
6	940.8300	30.57	1.39	31.96	46.00	-14.04	QP

Remark:

1. Margin = Result (Result = Reading + Factor) - Limit

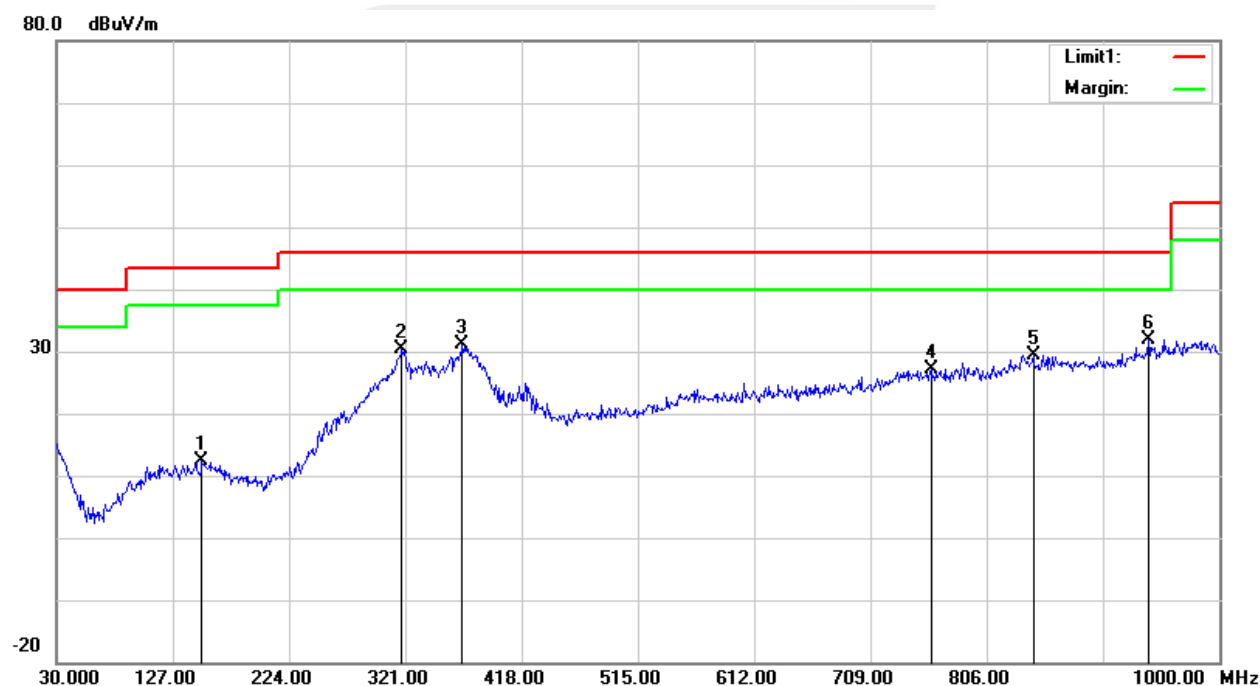




Temperature:	25.1(C)	Relative Humidity:	59%RH
Test Voltage:	DC 11.1V	Phase:	Vertical
Test Mode:	Mode 1/2/3(Mode 1 worst mode)		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	159.9800	31.32	-18.81	12.51	43.50	-30.99	QP
2	320.0300	35.26	-14.00	21.26	46.00	-24.74	QP
3	420.9100	39.74	-10.09	29.65	46.00	-16.35	QP
4	626.5500	30.05	-5.19	24.86	46.00	-21.14	QP
5	848.6800	30.11	-0.70	29.41	46.00	-16.59	QP
6	958.2900	29.65	1.73	31.38	46.00	-14.62	QP

Remark:

1. Margin = Result (Result =Reading + Factor )-Limit

80.0 dBuV/m

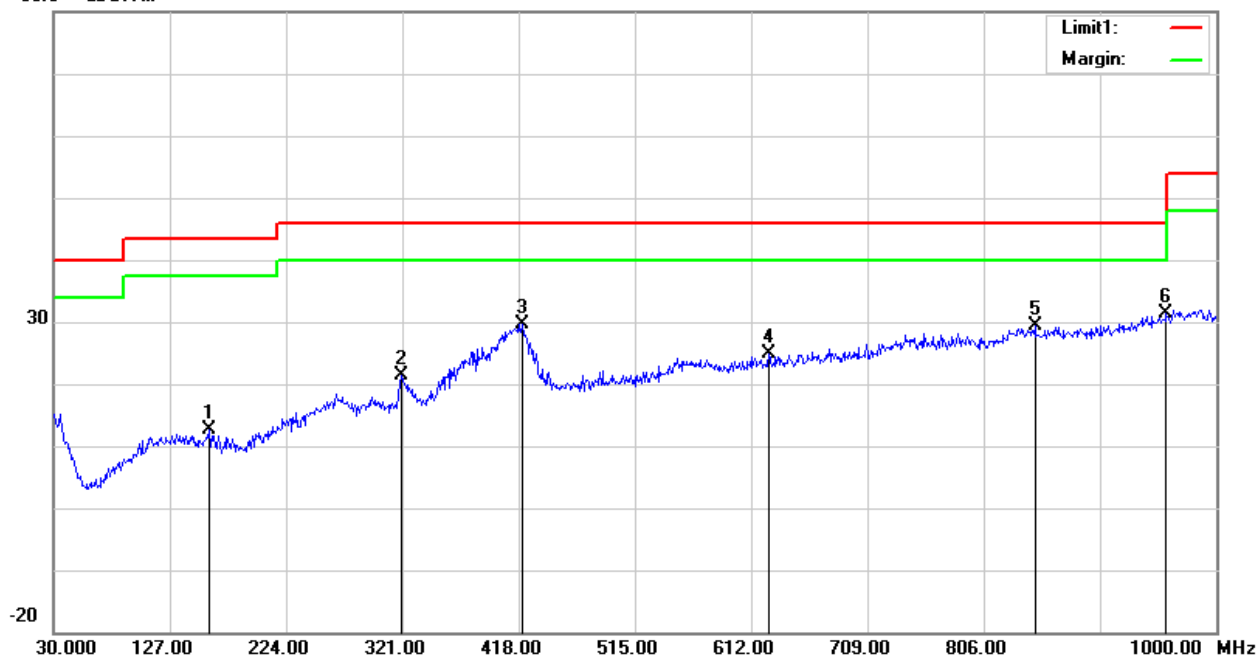





## (1GHz~25GHz) Restricted band and Spurious emission Requirements

Frequency (MHz)	Meter Reading (dBμV)	Amplifier (dB)	Loss (dB)	Antenna Factor (dB/m)	Corrected Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type	Comment
Low Channel (2405 MHz)										
3268.76	61.50	44.70	6.70	28.20	-9.80	51.70	74.00	-22.30	PK	Vertical
3268.76	51.14	44.70	6.70	28.20	-9.80	41.34	54.00	-12.66	AV	Vertical
3268.91	61.41	44.70	6.70	28.20	-9.80	51.61	74.00	-22.39	PK	Horizontal
3268.91	50.93	44.70	6.70	28.20	-9.80	41.13	54.00	-12.87	AV	Horizontal
4810.29	59.12	44.20	9.04	31.60	-3.56	55.56	74.00	-18.44	PK	Vertical
4810.29	50.04	44.20	9.04	31.60	-3.56	46.48	54.00	-7.52	AV	Vertical
4810.35	58.43	44.20	9.04	31.60	-3.56	54.87	74.00	-19.13	PK	Horizontal
4810.35	49.34	44.20	9.04	31.60	-3.56	45.78	54.00	-8.22	AV	Horizontal
5366.54	48.50	44.20	9.86	32.00	-2.34	46.16	74.00	-27.84	PK	Vertical
5366.54	40.38	44.20	9.86	32.00	-2.34	38.04	54.00	-15.96	AV	Vertical
5366.30	47.63	44.20	9.86	32.00	-2.34	45.29	74.00	-28.71	PK	Horizontal
5366.30	38.05	44.20	9.86	32.00	-2.34	35.71	54.00	-18.29	AV	Horizontal
7214.89	54.92	43.50	11.40	35.50	3.40	58.32	74.00	-15.68	PK	Vertical
7214.89	44.64	43.50	11.40	35.50	3.40	48.04	54.00	-5.96	AV	Vertical
7214.87	54.32	43.50	11.40	35.50	3.40	57.72	74.00	-16.28	PK	Horizontal
7214.87	44.19	43.50	11.40	35.50	3.40	47.59	54.00	-6.41	AV	Horizontal
Middle Channel (2441 MHz)										
3264.72	60.89	44.70	6.70	28.20	-9.80	51.09	74.00	-22.91	PK	Vertical
3264.72	50.27	44.70	6.70	28.20	-9.80	40.47	54.00	-13.53	AV	Vertical
3264.80	62.12	44.70	6.70	28.20	-9.80	52.32	74.00	-21.68	PK	Horizontal
3264.80	50.34	44.70	6.70	28.20	-9.80	40.54	54.00	-13.46	AV	Horizontal
4882.52	58.33	44.20	9.04	31.60	-3.56	54.77	74.00	-19.23	PK	Vertical
4882.52	49.40	44.20	9.04	31.60	-3.56	45.84	54.00	-8.16	AV	Vertical
4882.60	58.92	44.20	9.04	31.60	-3.56	55.36	74.00	-18.64	PK	Horizontal
4882.60	49.50	44.20	9.04	31.60	-3.56	45.94	54.00	-8.06	AV	Horizontal
5359.74	48.28	44.20	9.86	32.00	-2.34	45.94	74.00	-28.06	PK	Vertical
5359.74	39.11	44.20	9.86	32.00	-2.34	36.77	54.00	-17.23	AV	Vertical
5359.64	48.01	44.20	9.86	32.00	-2.34	45.67	74.00	-28.33	PK	Horizontal
5359.64	38.59	44.20	9.86	32.00	-2.34	36.25	54.00	-17.75	AV	Horizontal
7323.74	54.95	43.50	11.40	35.50	3.40	58.35	74.00	-15.65	PK	Vertical
7323.74	44.87	43.50	11.40	35.50	3.40	48.27	54.00	-5.73	AV	Vertical
7323.70	53.70	43.50	11.40	35.50	3.40	57.10	74.00	-16.90	PK	Horizontal
7323.70	43.99	43.50	11.40	35.50	3.40	47.39	54.00	-6.61	AV	Horizontal



High Channel (2473MHz)										
3255.40	61.49	44.70	6.70	28.20	-9.80	51.69	74.00	-22.31	PK	Vertical
3255.40	51.41	44.70	6.70	28.20	-9.80	41.61	54.00	-12.39	AV	Vertical
3255.36	62.01	44.70	6.70	28.20	-9.80	52.21	74.00	-21.79	PK	Horizontal
3255.36	50.48	44.70	6.70	28.20	-9.80	40.68	54.00	-13.32	AV	Horizontal
4946.42	58.33	44.20	9.04	31.60	-3.56	54.77	74.00	-19.23	PK	Vertical
4946.42	49.38	44.20	9.04	31.60	-3.56	45.82	54.00	-8.18	AV	Vertical
4946.52	59.11	44.20	9.04	31.60	-3.56	55.55	74.00	-18.45	PK	Horizontal
4946.52	49.19	44.20	9.04	31.60	-3.56	45.63	54.00	-8.37	AV	Horizontal
5344.69	48.42	44.20	9.86	32.00	-2.34	46.08	74.00	-27.92	PK	Vertical
5344.69	40.26	44.20	9.86	32.00	-2.34	37.92	54.00	-16.08	AV	Vertical
5344.67	47.42	44.20	9.86	32.00	-2.34	45.08	74.00	-28.92	PK	Horizontal
5344.67	38.36	44.20	9.86	32.00	-2.34	36.02	54.00	-17.98	AV	Horizontal
7418.82	54.36	43.50	11.40	35.50	3.40	57.76	74.00	-16.24	PK	Vertical
7418.82	43.64	43.50	11.40	35.50	3.40	47.04	54.00	-6.96	AV	Vertical
7418.73	54.09	43.50	11.40	35.50	3.40	57.49	74.00	-16.51	PK	Horizontal
7418.73	43.88	43.50	11.40	35.50	3.40	47.28	54.00	-6.72	AV	Horizontal

Note:


- 1) Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Emission Level = Reading + Factor

- 2) The frequency emission of peak points that did not show above the forms are at least 20dB below the limit, the frequency emission is mainly from the environment noise.




## Restricted band Requirements

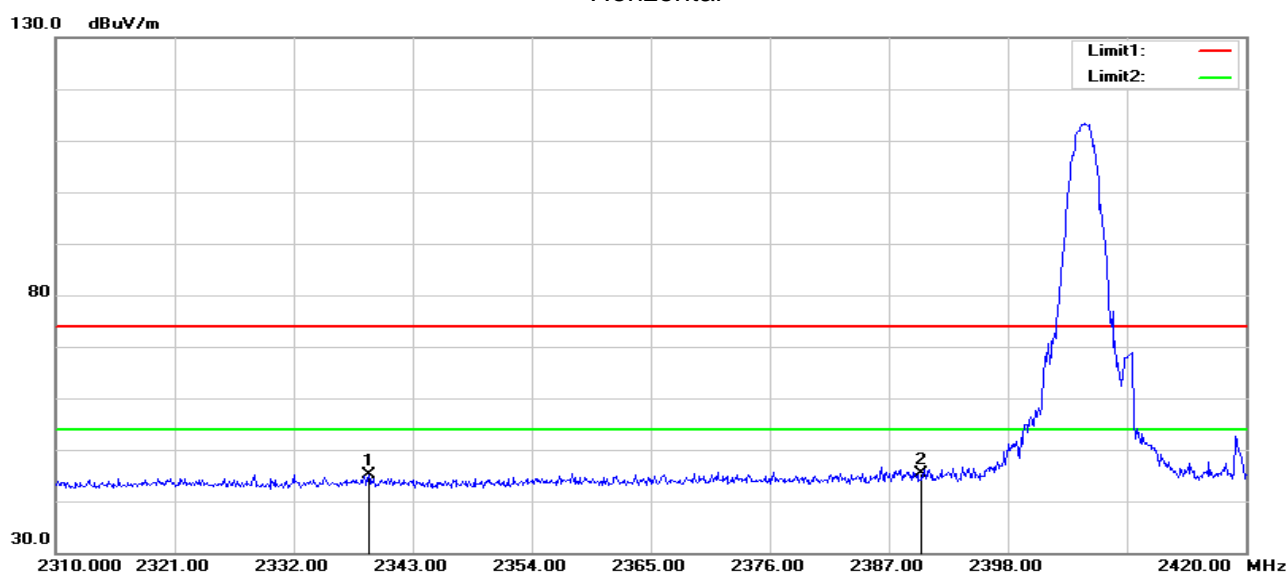Low channel  
Horizontal

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2338.930	41.45	3.68	45.13	74.00	-28.87	peak
2	2390.000	40.98	4.34	45.32	74.00	-28.68	peak


## Vertical

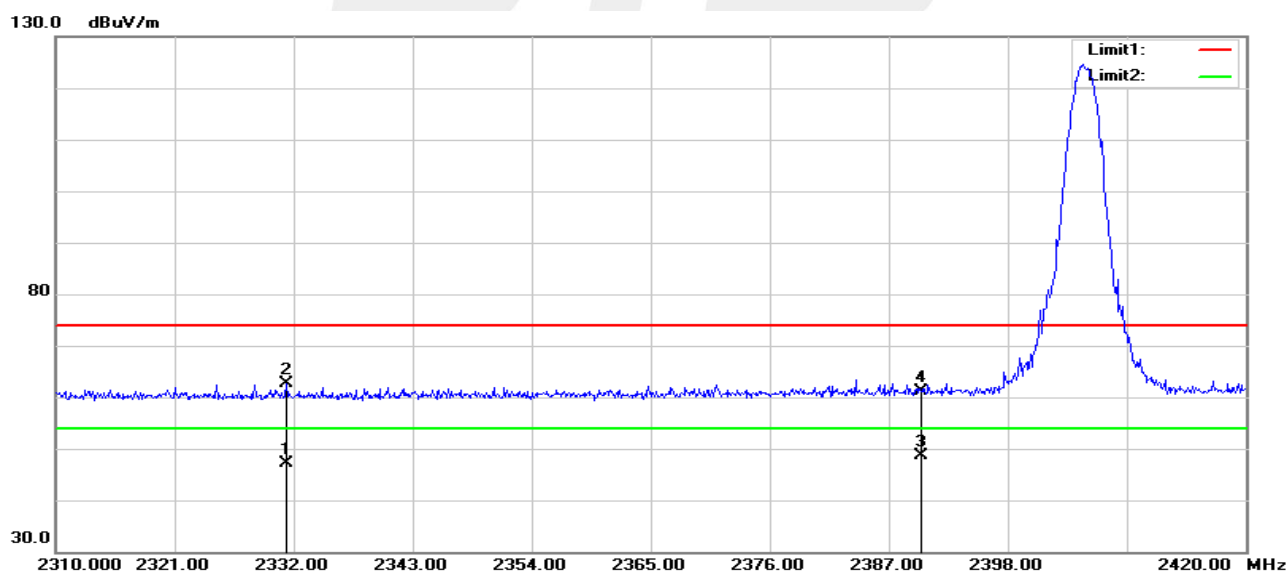

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2331.340	43.51	3.64	47.15	54.00	-6.85	AVG
2	2331.340	58.87	3.64	62.51	74.00	-11.49	peak
3	2390.000	44.39	4.34	48.73	54.00	-5.27	AVG
4	2390.000	56.86	4.34	61.20	74.00	-12.80	peak




### High channel Horizontal

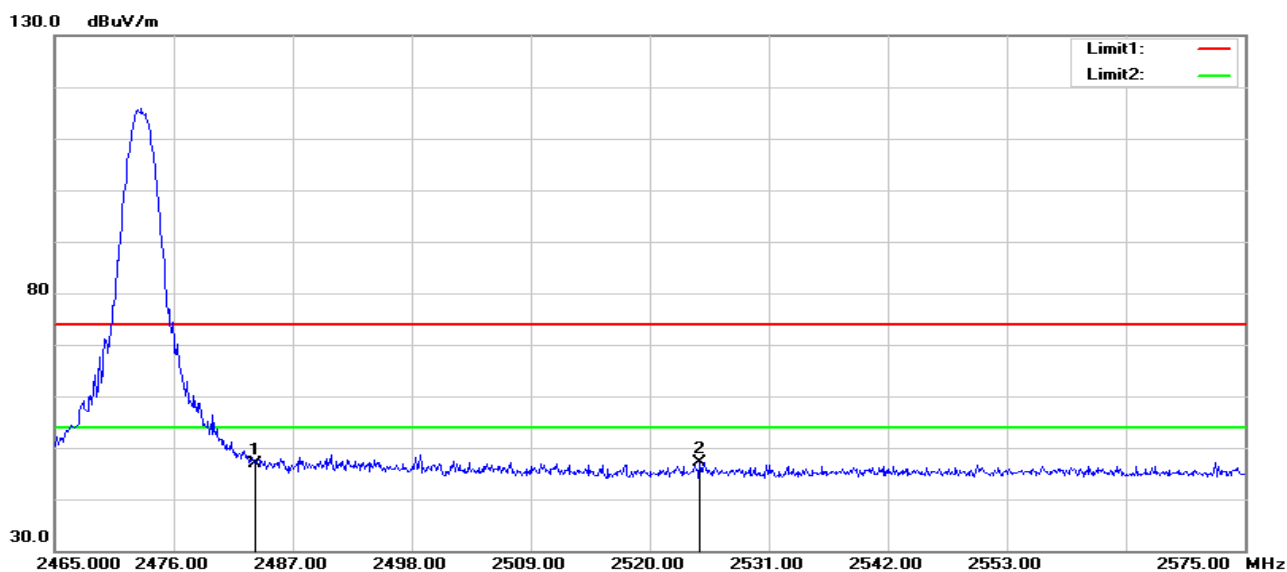

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	2483.500	42.17	4.60	46.77	74.00	-27.23	peak
2	2524.620	42.25	4.81	47.06	74.00	-26.94	peak

### Vertical

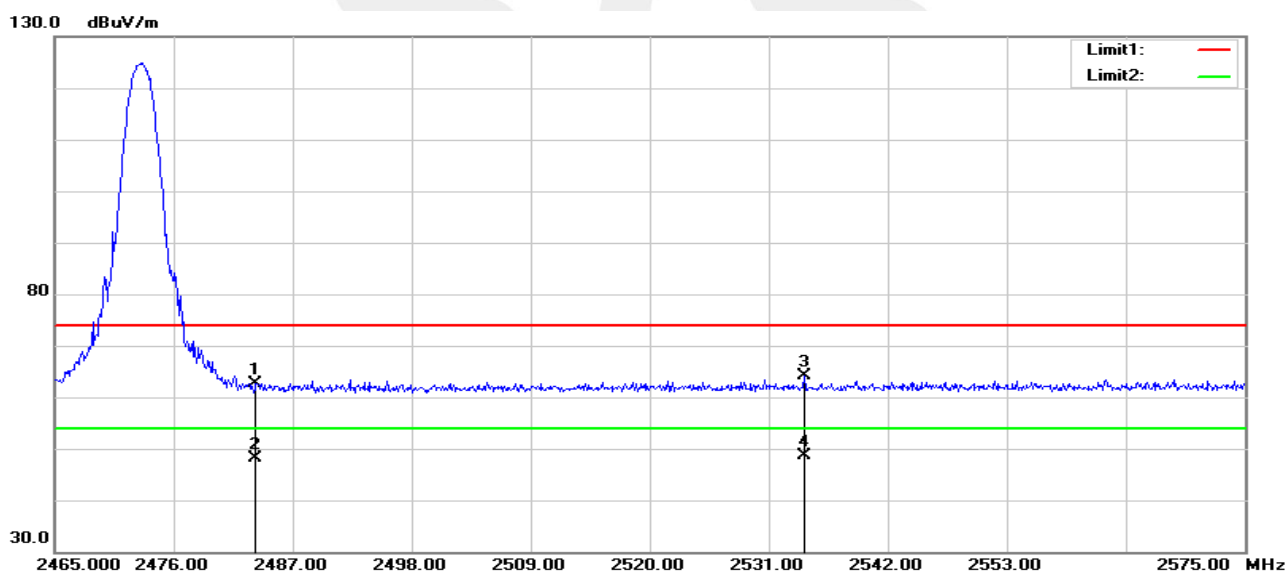

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	2483.500	58.05	4.60	62.65	74.00	-11.35	peak
2	2483.500	43.50	4.60	48.10	54.00	-5.90	AVG
3	2534.300	59.33	4.88	64.21	74.00	-9.79	peak
4	2534.300	43.70	4.88	48.58	54.00	-5.42	AVG

Note: The nohopping and hopping mode all have been test, the worst case is the nohopping mode, this report only show the worst case.

## 4. CONDUCTED SPURIOUS & BAND EDGE EMISSION

### 4.1 LIMIT

According to FCC section 15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

### 4.2 TEST PROCEDURE

Spectrum Parameter	Setting
Detector	Peak
Start/Stop Frequency	30 MHz to 10th carrier harmonic
RB / VB (emission in restricted band)	100 KHz/300 KHz
Trace-Mode:	Max hold

For Band edge

Spectrum Parameter	Setting
Detector	Peak
Start/Stop Frequency	Lower Band Edge: 2350– 2407 MHz Upper Band Edge: 2471 – 2500 MHz
RB / VB (emission in restricted band)	100 KHz/300 KHz
Trace-Mode:	Max hold

Remark: Hopping on and Hopping off mode all have been tested, only worst case hopping off is reported.

### 4.3 TEST SETUP



The EUT is connected to the Spectrum Analyzer; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. In order to make an accurate measurement, set the span greater than RBW.

### 4.4 EUT OPERATION CONDITIONS


The EUT tested system was configured as the statements of 2.3 Unless otherwise a special operating condition is specified in the follows during the testing.




## 4.5 TEST RESULTS

Temperature:	25°C	Relative Humidity:	50%
Test Mode:	CH 01/10/18	Test Voltage:	DC 11.1V


## 01 CH

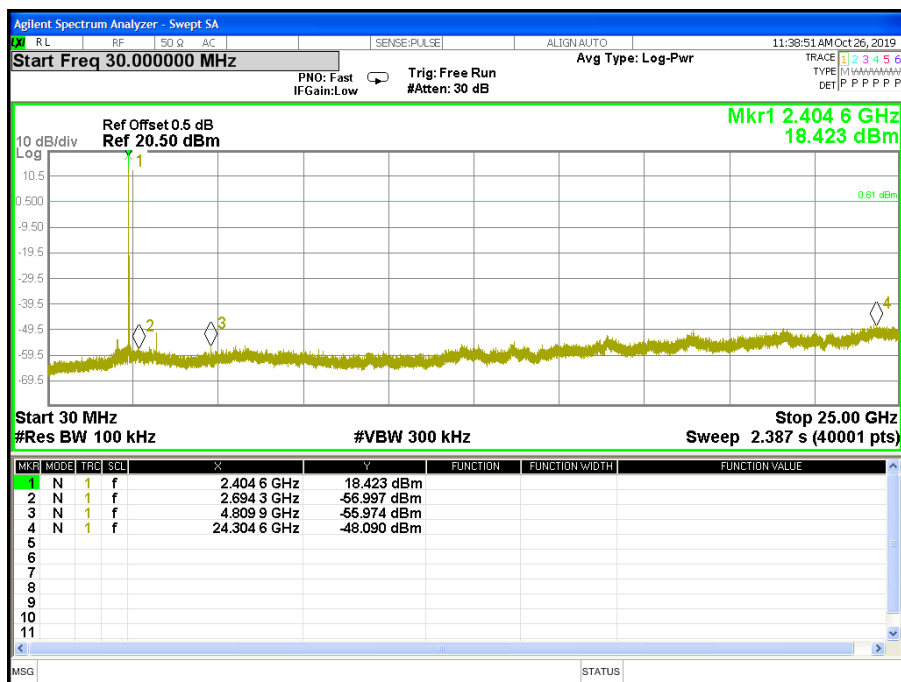

## 10 CH

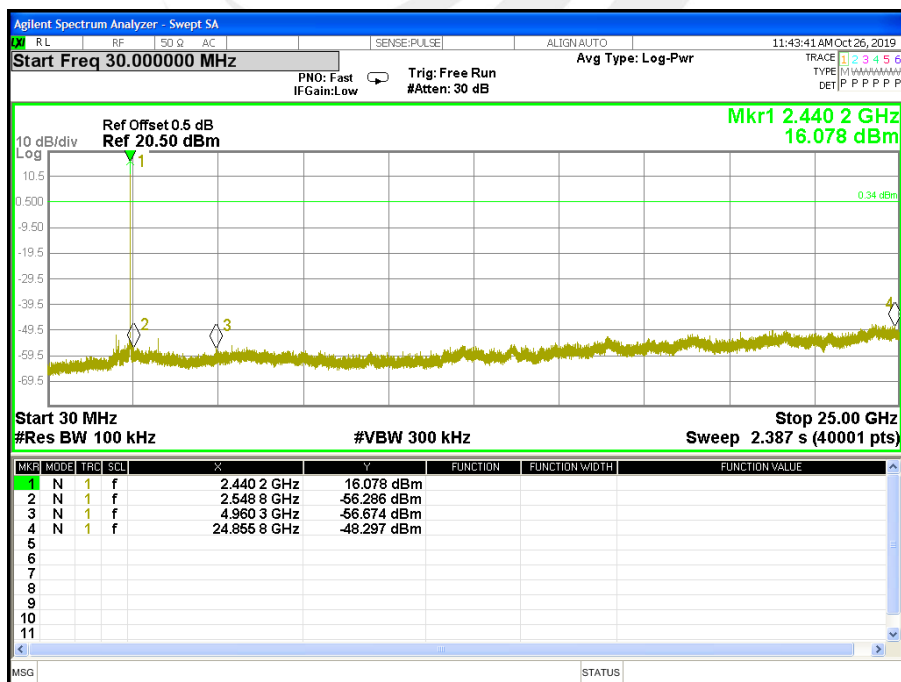


18 CH

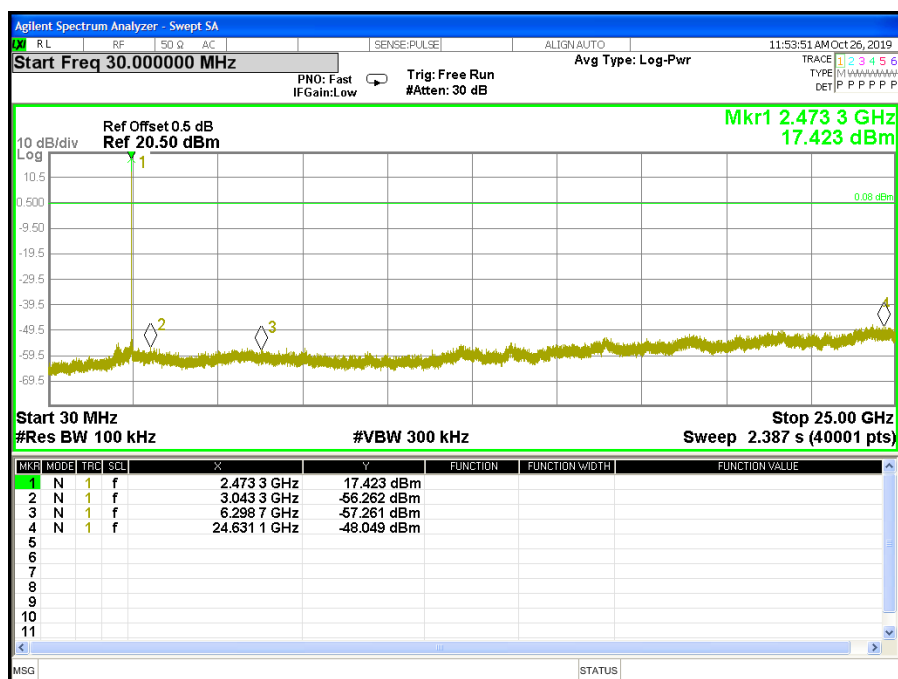




For Band edge

01 CH

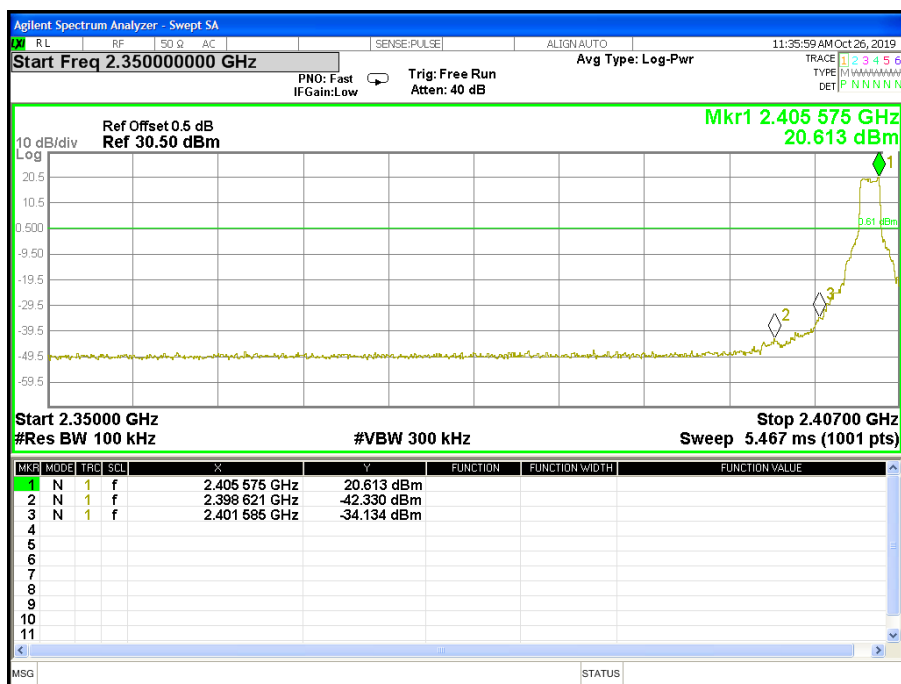


10 CH

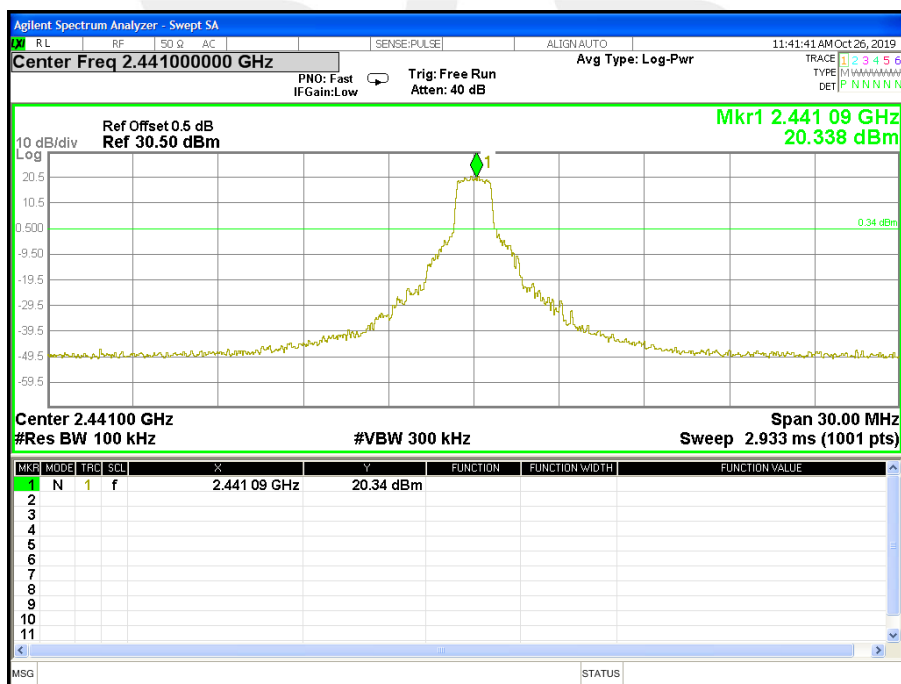






18 CH

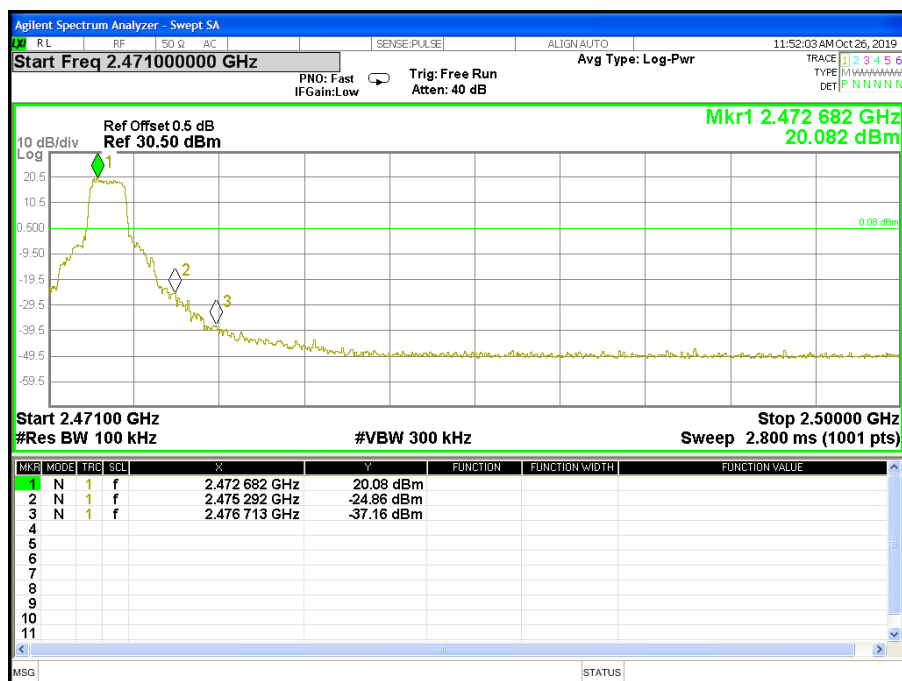




For Hopping Band edge

01 CH

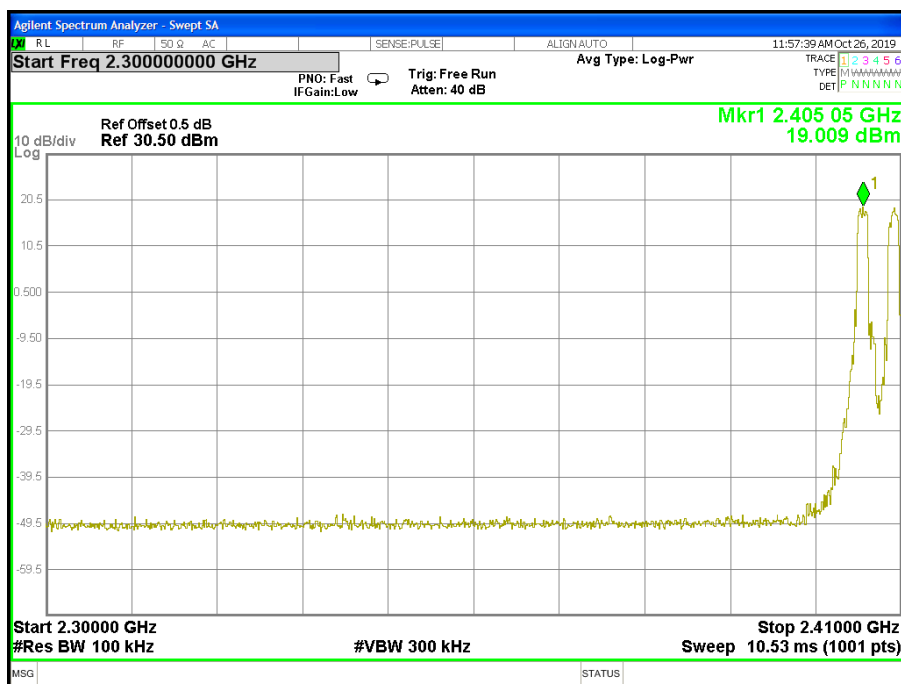

18 CH

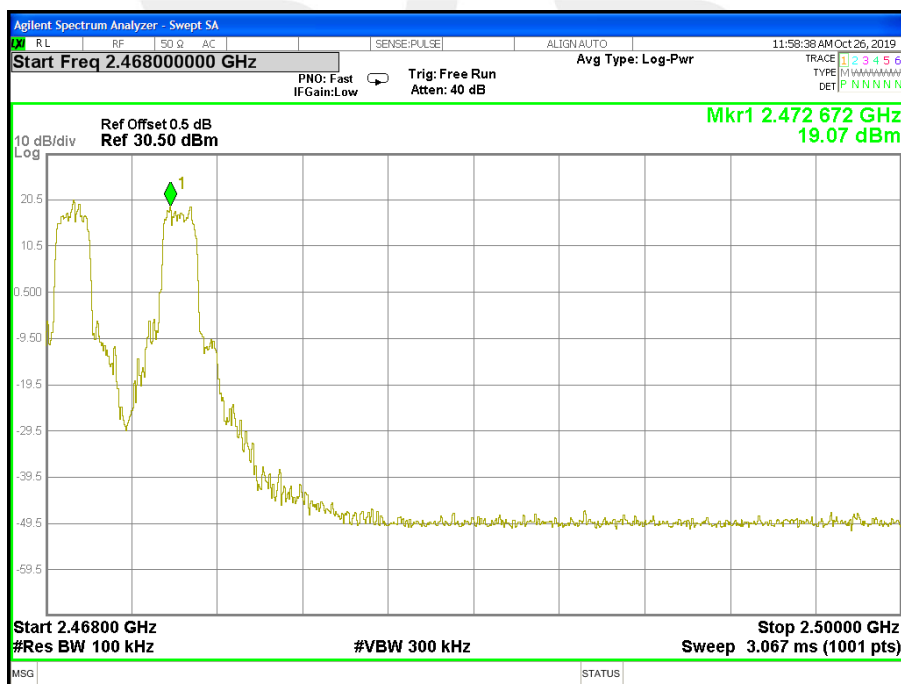



## 5. NUMBER OF HOPPING CHANNEL

### 5.1 LIMIT

FCC Part 15.247, Subpart C				
Section	Test Item	Limit	FrequencyRange (MHz)	Result
15.247 (a)(1)(iii)	Number of Hopping Channel	$\geq 15$	2400-2483.5	PASS

Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	> Operating FrequencyRange
RB	300KHz
VB	300KHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

### 5.2 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- Spectrum Setting: RBW= 300KHz, VBW=300KHz, Sweep time = Auto.

### 5.3 TEST SETUP



### 5.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.




## 5.5 TEST RESULTS

Temperature:	25°C	Relative Humidity:	60%
Test Mode:	Hopping Mode -GFSK Mode	Test Voltage:	DC 11.1V

Number of Hopping Channel

18

## Hopping channel

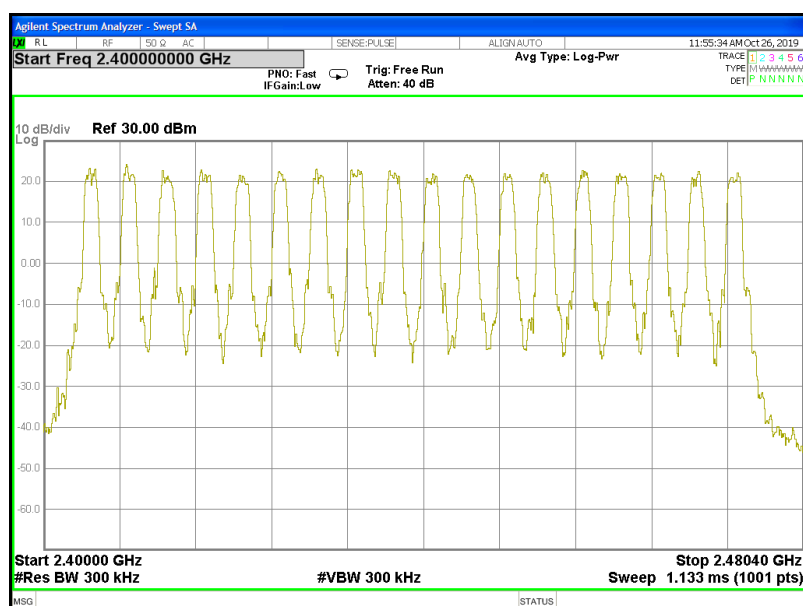



## 6. AVERAGE TIME OF OCCUPANCY

### 6.1 LIMIT

FCC Part 15.247, Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247 (a)(1)(iii)	Average Time of Occupancy	0.4sec	2400-2483.5	PASS

### 6.2 TEST PROCEDURE

- The transmitter output (antenna port) was connected to the spectrum analyzer
- Set RBW = 1MHz/VBW = 1MHz.
- Sweep Time is more than once pulse time.
- Set the center frequency on any frequency would be measure and set the frequency span to zero span.
- Measure the maximum time duration of one single pulse.
- Set the EUT for TX transmitting.
- Measure the maximum time duration of one single pulse.
- Dwell Time(s) = One pulse time(ms) \* Burst number/1000

### 6.3 TEST SETUP



### 6.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.



## 6.5 TEST RESULTS



Temperature:	25°C	Relative Humidity:	50%
Test Mode:	CH 01/10/18	Test Voltage:	DC 11.1V

Channel	pulse time(ms)	Dwell Time(s)	Limits(s)	Sweep Time (s)	Burst Number	Verdict
Lower	2.250	0.063	0.4	7.2	28	Pass
middle	2.250	0.063	0.4	7.2	28	Pass
Higher	2.250	0.063	0.4	7.2	28	Pass







## 01 CH

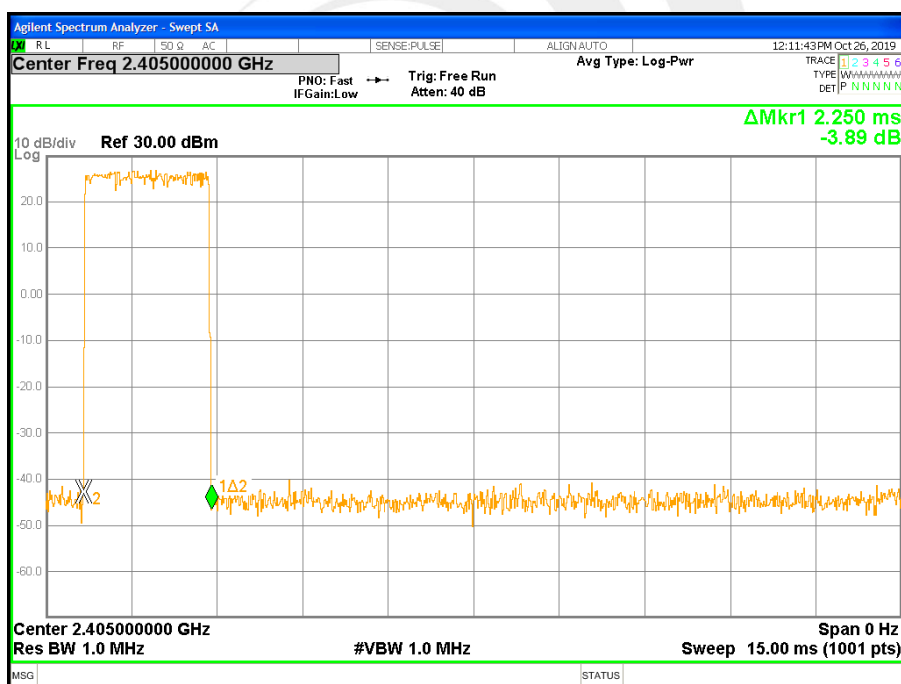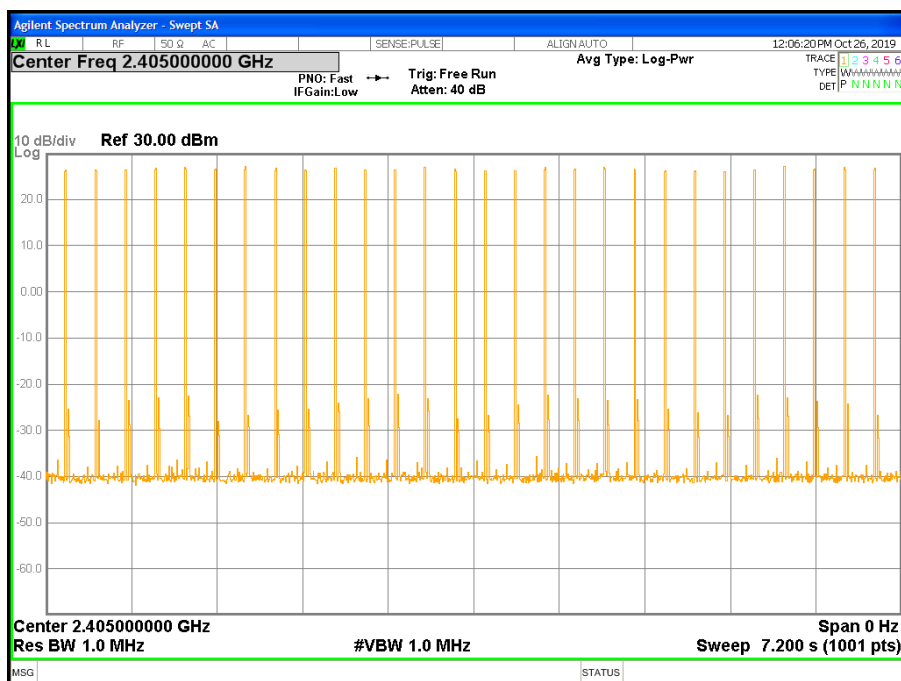





## 10 CH

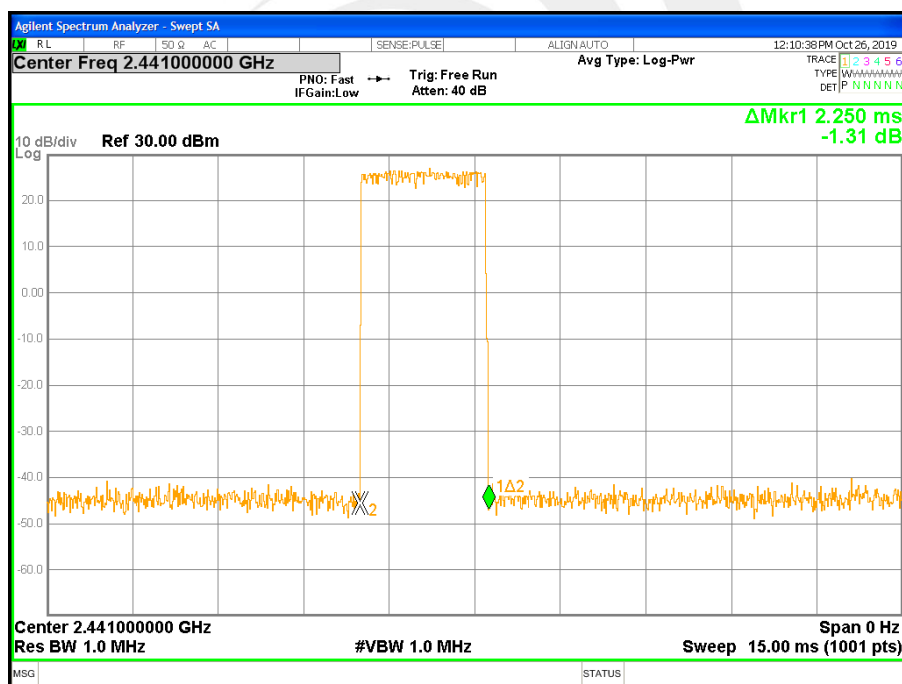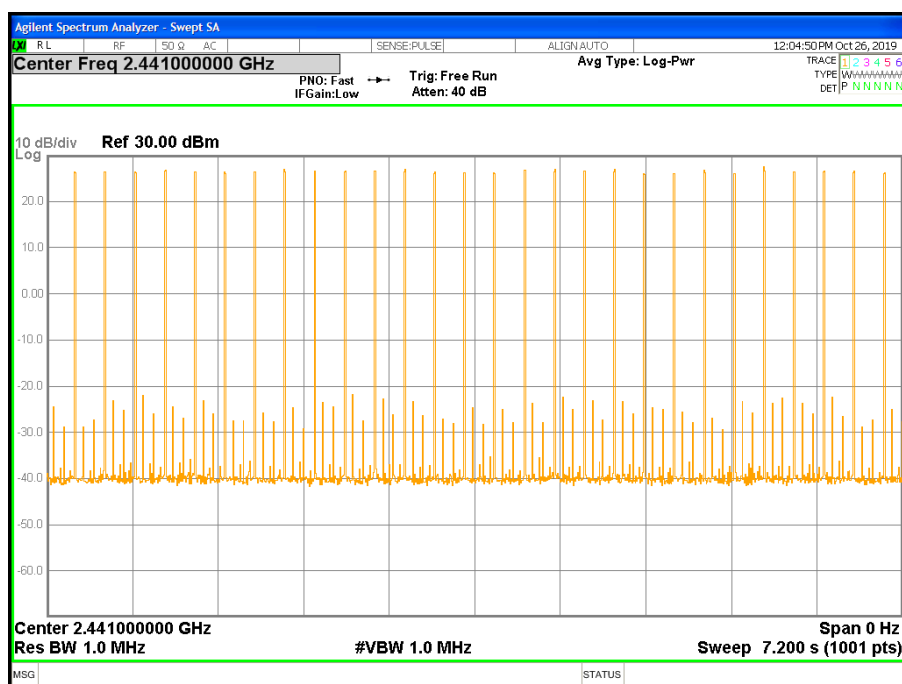





## 18 CH

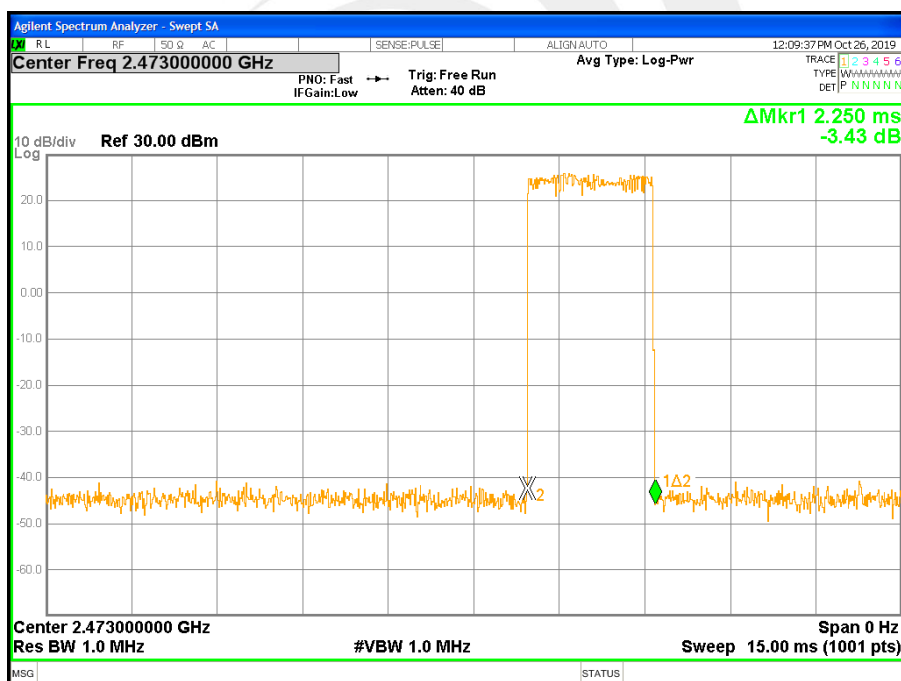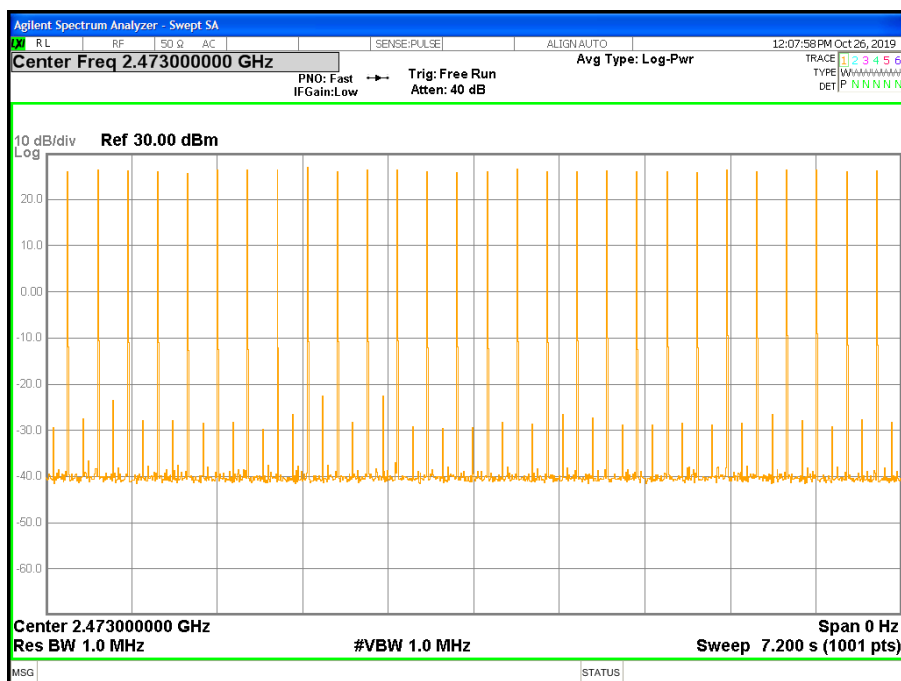

## 7. HOPPING CHANNEL SEPARATION MEASUREMENT

### 7.1 LIMIT


Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	> 20 dB Bandwidth or Channel Separation
RB	30 kHz (20dB Bandwidth) / 30 kHz (Channel Separation)
VB	100 kHz (20dB Bandwidth) / 100 kHz (Channel Separation)
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

### 7.2 TEST PROCEDURE

- The transmitter output (antenna port) was connected to the spectrum analyser in peak hold mode.
- The resolution bandwidth of 30 kHz and the video bandwidth of 100 kHz were utilised for 20 dB bandwidth measurement.
- The resolution bandwidth of 30 kHz and the video bandwidth of 100 kHz were utilised for channel separation measurement.

### 7.3 TEST SETUP

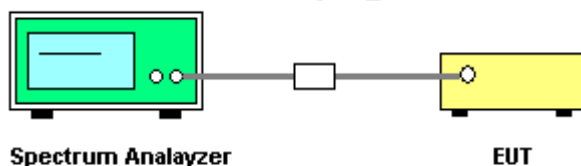

### 7.4 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.




## 7.5 TEST RESULTS

Temperature:	25°C	Relative Humidity:	50%
Test Mode:	CH01 / CH10 / CH18	Test Voltage:	DC 11.1V

Frequency	Mark1 Frequency (MHz)	Mark2 Frequency (MHz)	Ch. Separation (MHz)	Limit (MHz)	Result
2405 MHz	2405.176	2409.176	4.000	1.303	Complies
2441 MHz	2437.176	2440.752	3.576	1.294	Complies
2473 MHz	2469.432	2473.448	4.016	1.299	Complies


For GFSK: Ch. Separation Limits: > 20dB bandwidth

### CH01 -1Mbps

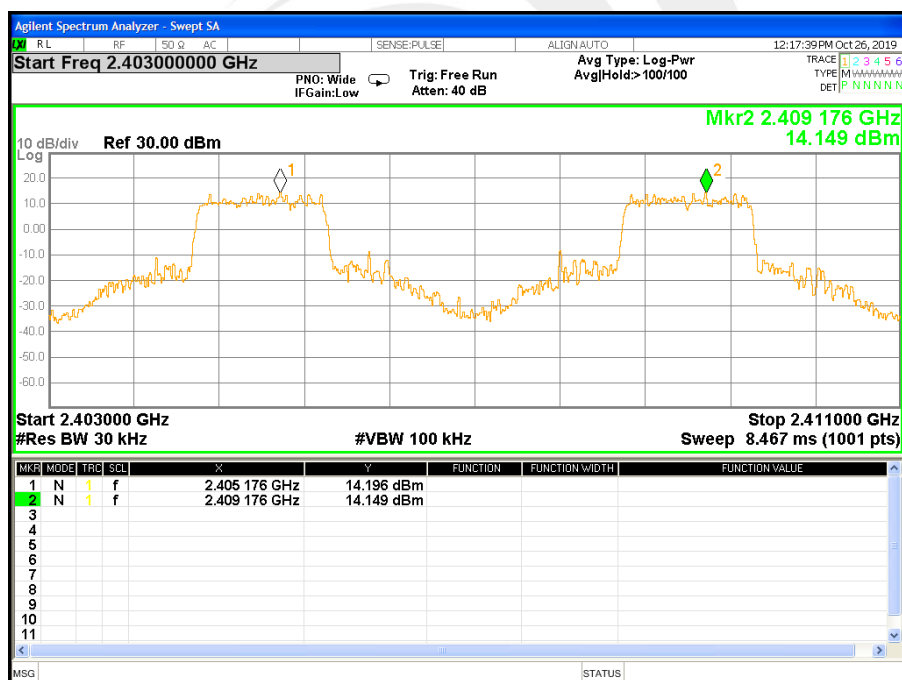




## CH10 -1Mbps

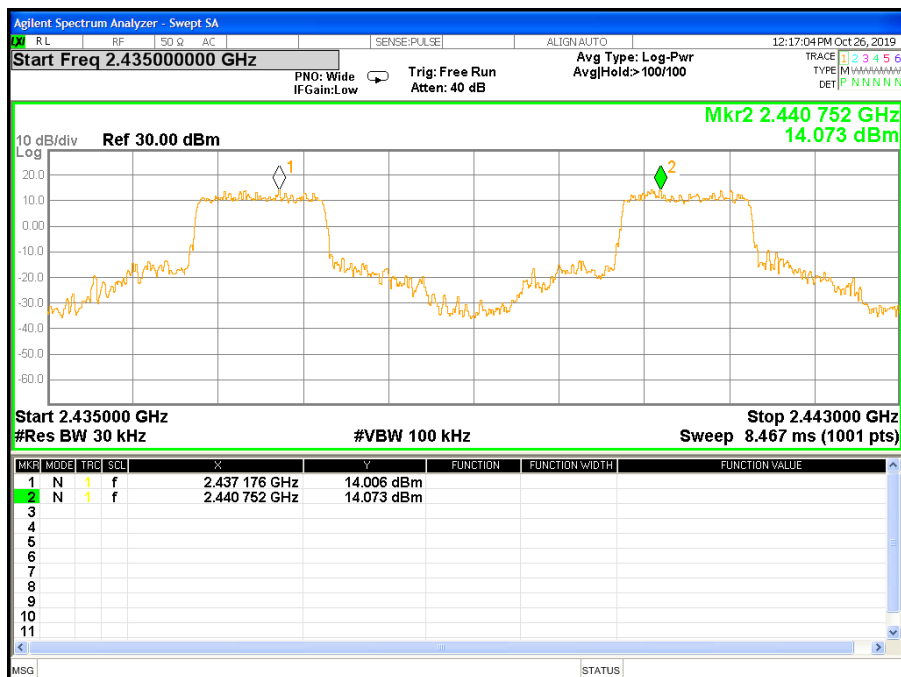

## CH18 -1Mbps

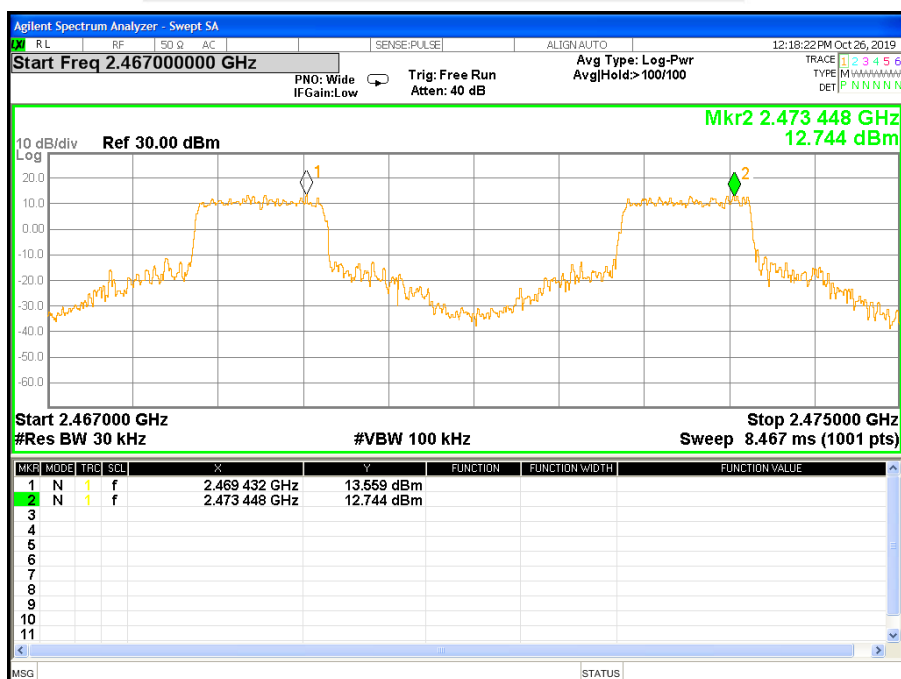



## 8. BANDWIDTH TEST

### 8.1 LIMIT

FCC Part15 15.247,Subpart C				
Section	Test Item	Limit	FrequencyRange (MHz)	Result
15.247 (a)(1)	Bandwidth	(20dB bandwidth)	2400-2483.5	PASS

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	> Measurement Bandwidth or Channel Separation
RB	30 kHz (20dB Bandwidth) / 30 kHz (Channel Separation)
VB	100 kHz (20dB Bandwidth) / 100 kHz (Channel Separation)
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

### 8.2 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- Spectrum Setting: RBW= 30KHz, VBW=100KHz, Sweep time = Auto.

### 8.3 TEST SETUP



### 8.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.




## 8.5 TEST RESULTS

Temperature:	25°C	Relative Humidity:	50%
Test Mode:	CH01 / CH10/ C18	Test Voltage:	DC 11.1V


Frequency	20dB Bandwidth (MHz)	Result
2405 MHz	1.303	PASS
2441 MHz	1.294	PASS
2473 MHz	1.299	PASS

## CH00 -1Mbps

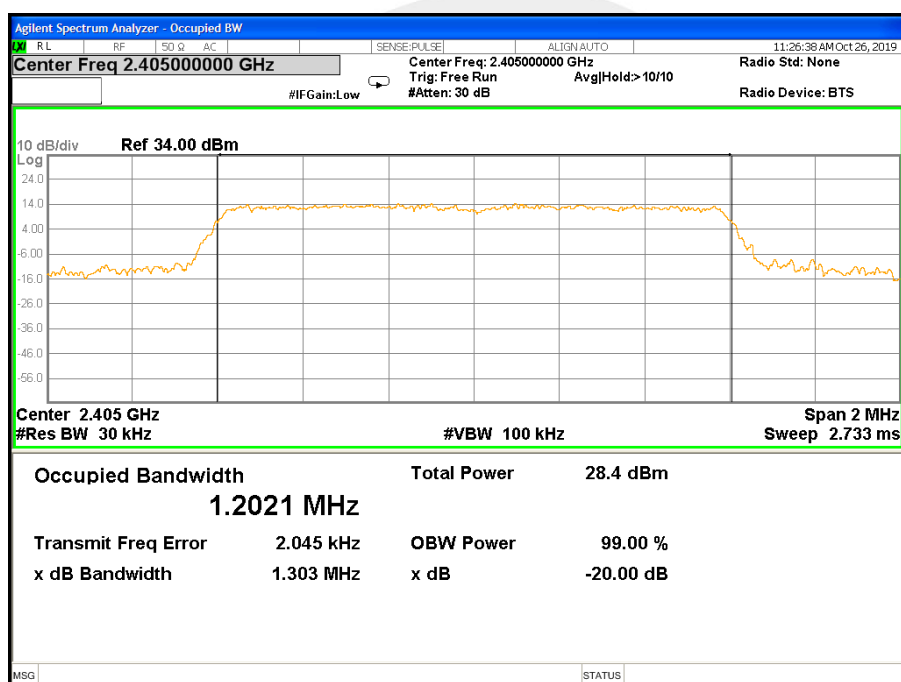




## CH10 -1Mbps

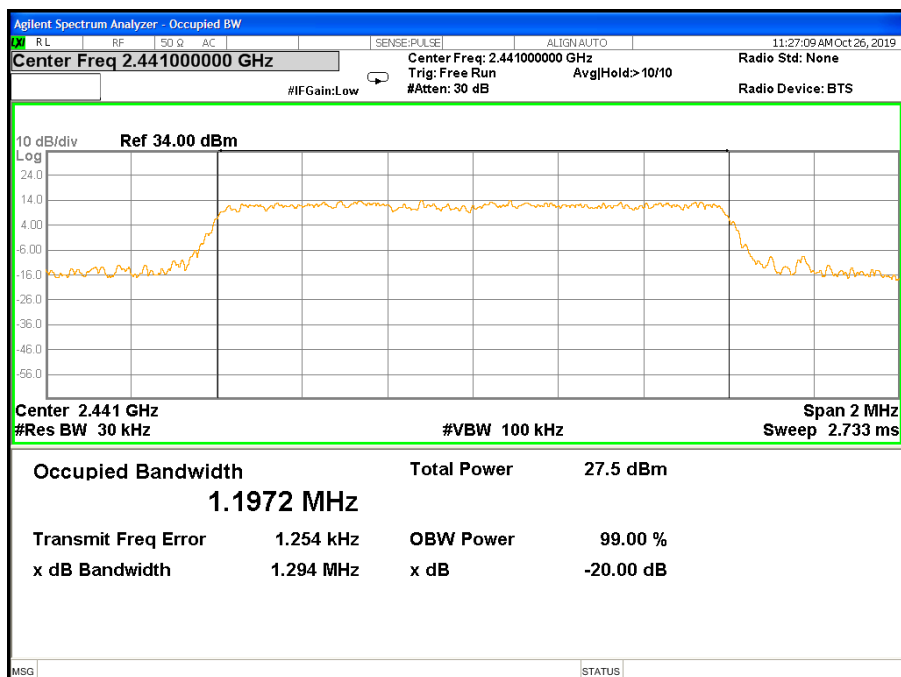

## CH18 -1Mbps

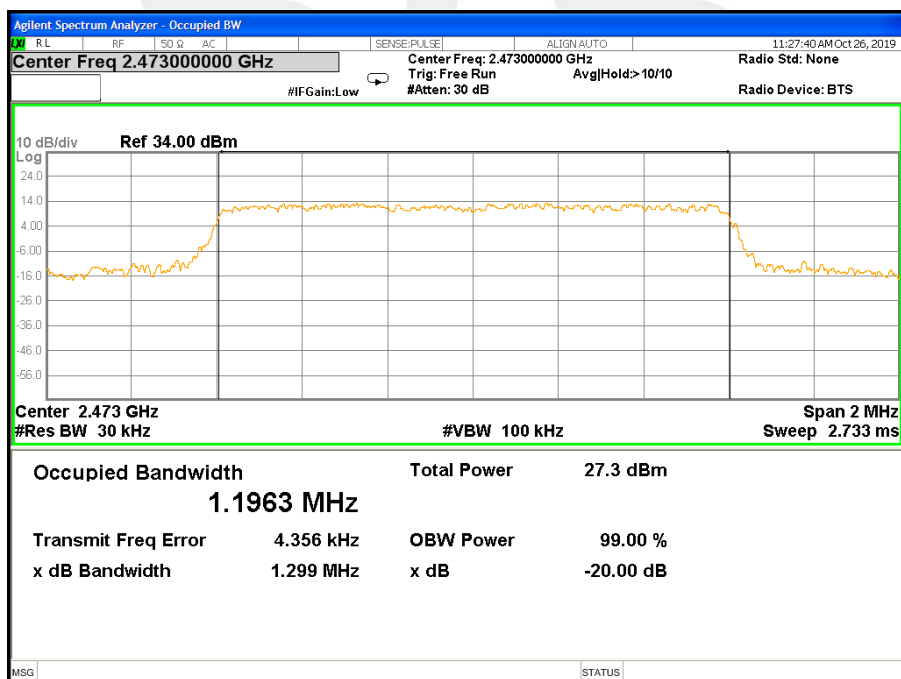



## 9. OUTPUT POWER TEST


### 9.1 LIMIT

FCC Part 15.247, Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247 (a)(1)&(b)(1)	Output Power	1 W or 0.125W	2400-2483.5	PASS
		if channel separation > 2/3 bandwidth provided the systems operate with an output power no greater than 125 mW (20.97 dBm)		

### 9.2 TEST PROCEDURE

- a. The EUT was directly connected to the Power Sensor & PC

### 9.3 TEST SETUP



### 9.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.





## 9.5 TEST RESULTS

Temperature:	25°C	Relative Humidity:	60%
Test Voltage:	DC 11.1V		

Frequency (MHz)	Peak Power	Average Power	Limit
	(dBm)	(dBm)	(dBm)
2405	27.43	14.54	30.00
2441	26.58	13.94	30.00
2473	26.6	14.01	30.00

Note: the channel separation >20dB bandwidth





## 10. ANTENNA REQUIREMENT

### 10.1 STANDARD REQUIREMENT

15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

### 10.2 EUT ANTENNA

The EUT antenna is Dipole Antenna. It comply with the standard requirement.





## APPENDIX-PHOTOS OF TEST SETUP

Note: See test photos in setup photo document for the actual connections between Product and support equipment.

※※※※※END OF THE REPORT※※※※※

